


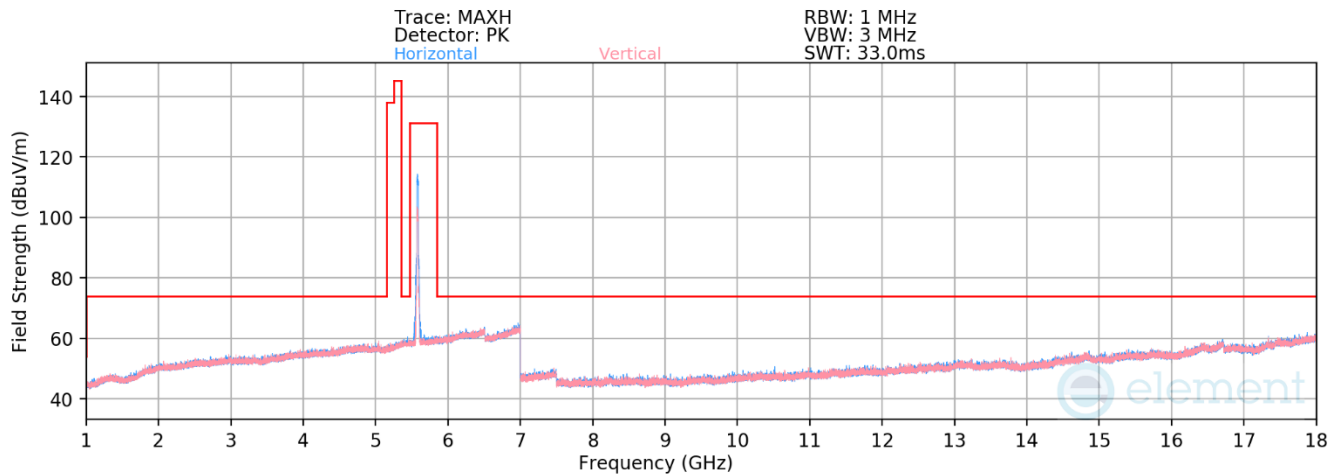

Plot 7-416. RSE above 1GHz Antenna WF5b (11ax – Ch.116 – RU242)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS11
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5580MHz
Channel: 116

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11160.00	Average	H	-	-	-81.05	10.39	36.34	53.98	-17.64
*	11160.00	Peak	H	-	-	-69.97	10.39	47.42	73.98	-26.56
	16740.00	Peak	H	-	-	-71.51	17.57	53.06	68.20	-15.14

Table 7-138. Radiated Measurements Antenna WF5b (RU242)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 171 of 278

V 10.5 12/15/2021

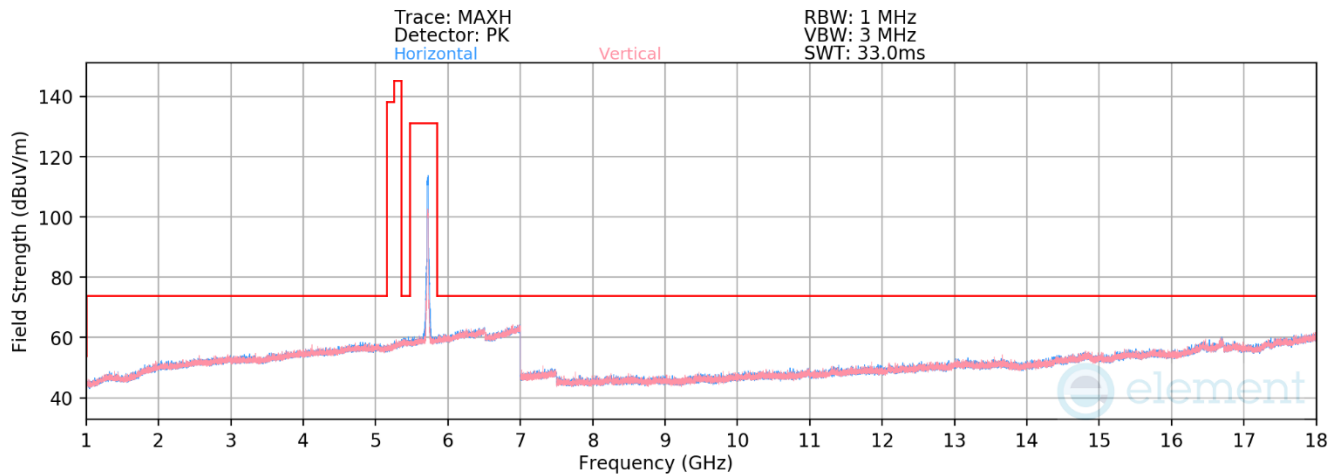

Plot 7-417. RSE above 1GHz Antenna WF5b (11ax – Ch.144 – RU242)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS11
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5720MHz
Channel: 144

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11440.00	Average	H	-	-	-81.38	10.79	36.41	53.98	-17.57
*	11440.00	Peak	H	-	-	-69.89	10.79	47.90	73.98	-26.08
	17160.00	Peak	H	-	-	-72.54	18.62	53.08	68.20	-15.12

Table 7-139. Radiated Measurements Antenna WF5b (RU242)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 172 of 278

V 10.5 12/15/2021

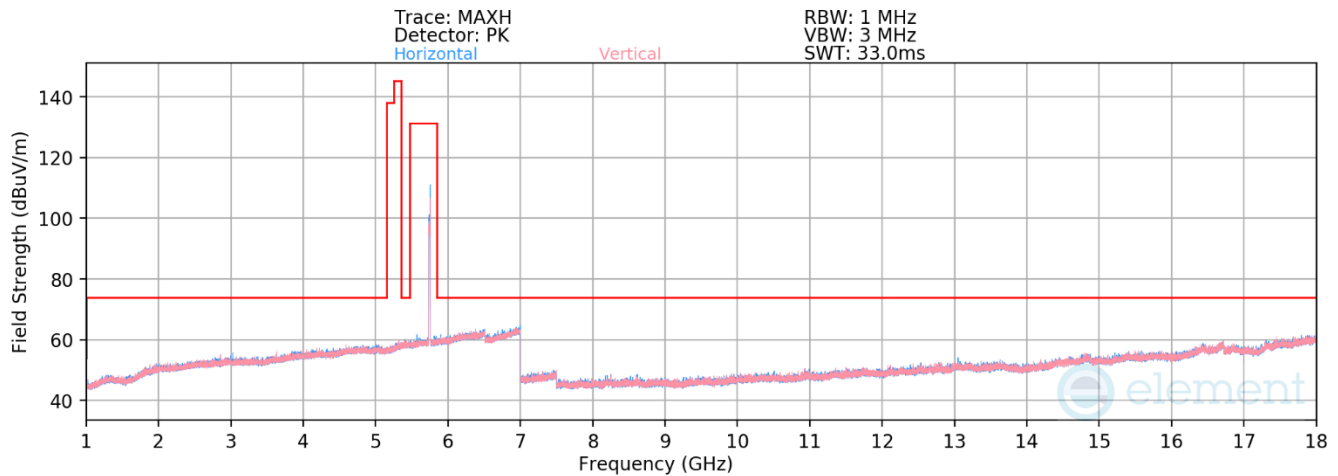

Plot 7-418. RSE above 1GHz Antenna WF5b (11ax – Ch.149 – RU242)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS11
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5745MHz
Channel: 149

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11490.00	Average	H	-	-	-81.38	10.82	36.44	53.98	-17.54
*	11490.00	Peak	H	-	-	-69.94	10.82	47.88	73.98	-26.10
	17235.00	Peak	H	-	-	-72.90	18.44	52.54	68.20	-15.66

Table 7-140. Radiated Measurements Antenna WF5b (RU242)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 173 of 278

V 10.5 12/15/2021

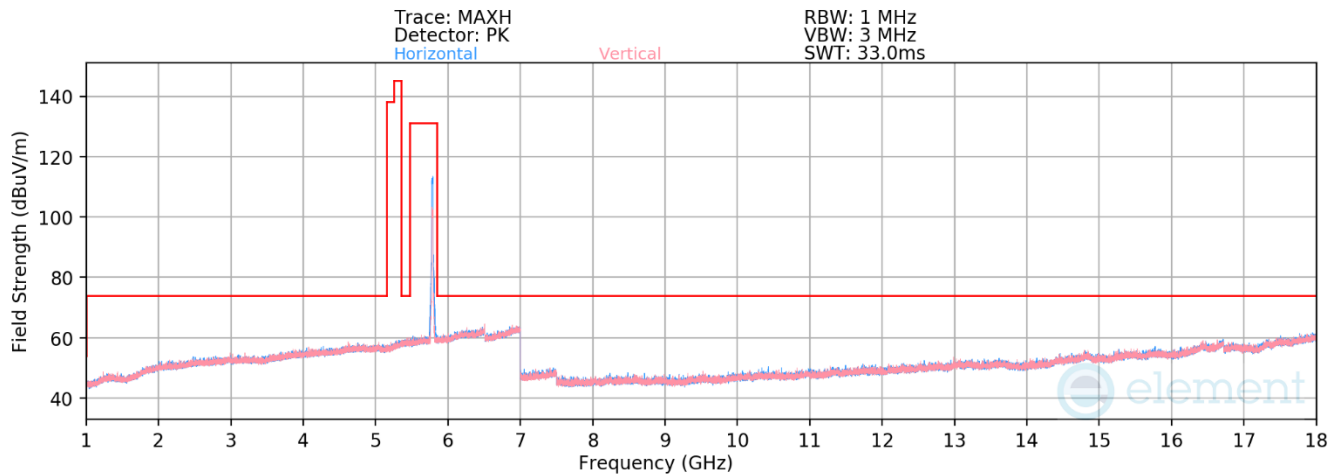

Plot 7-419. RSE above 1GHz Antenna WF5b (11ax – Ch.157 – RU242)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS11
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5785MHz
Channel: 157

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11570.00	Average	H	-	-	-81.59	10.97	36.38	53.98	-17.60
*	11570.00	Peak	H	-	-	-69.74	10.97	48.23	73.98	-25.75
	17355.00	Peak	H	-	-	-73.24	19.31	53.07	68.20	-15.13

Table 7-141. Radiated Measurements Antenna WF5b (RU242)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 174 of 278

V 10.5 12/15/2021

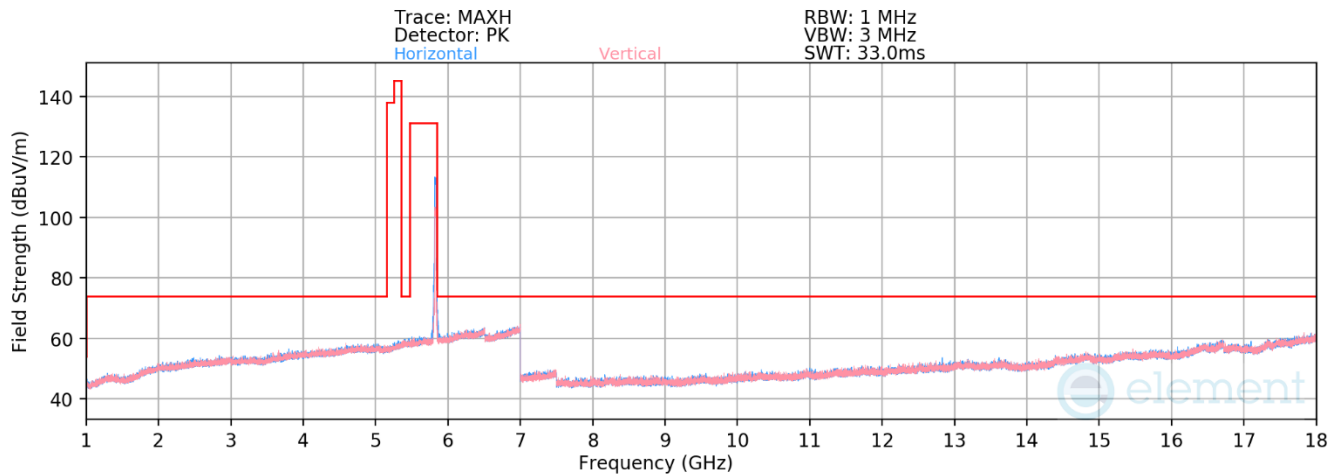

Plot 7-420. RSE above 1GHz Antenna WF5b (11ax – Ch.165 – RU242)

Mode: 802.11ax (20MHz BW)
Data Rate: MCS11
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5825MHz
Channel: 165

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11650.00	Average	H	-	-	-81.47	11.13	36.66	53.98	-17.32
*	11650.00	Peak	H	-	-	-70.04	11.13	48.09	73.98	-25.89
	17475.00	Peak	H	-	-	-73.67	21.67	55.00	68.20	-13.20


Table 7-142. Radiated Measurements Antenna WF5b (RU242)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 175 of 278

V 10.5 12/15/2021

7.6.2 Antenna WF4a Radiated Spurious Emission

RU26/52

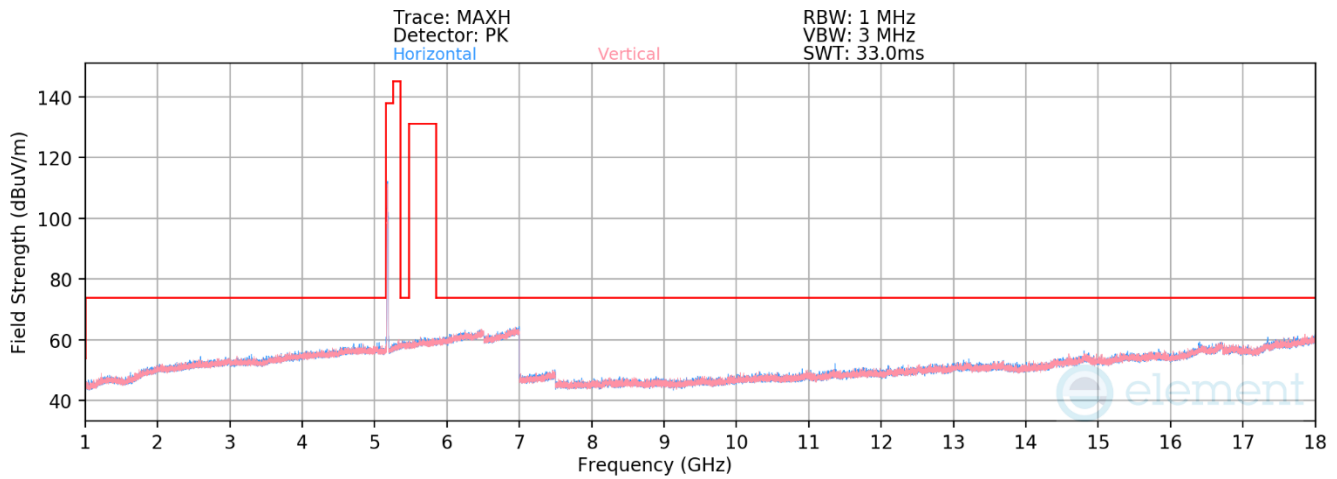

Plot 7-421. RSE above 1GHz Antenna WF4a (11ax – Ch.36 – RU26)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS11
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5180MHz
Channel: 36

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10360.00	Peak	H	-	-	-68.79	10.05	48.26	68.20	-19.94
* 15540.00	Average	H	-	-	-81.87	15.23	40.36	53.98	-13.62
* 15540.00	Peak	H	-	-	-70.13	15.23	52.10	73.98	-21.88

Table 7-143. Radiated Measurements Antenna WF4a (RU26)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 176 of 278

V 10.5 12/15/2021

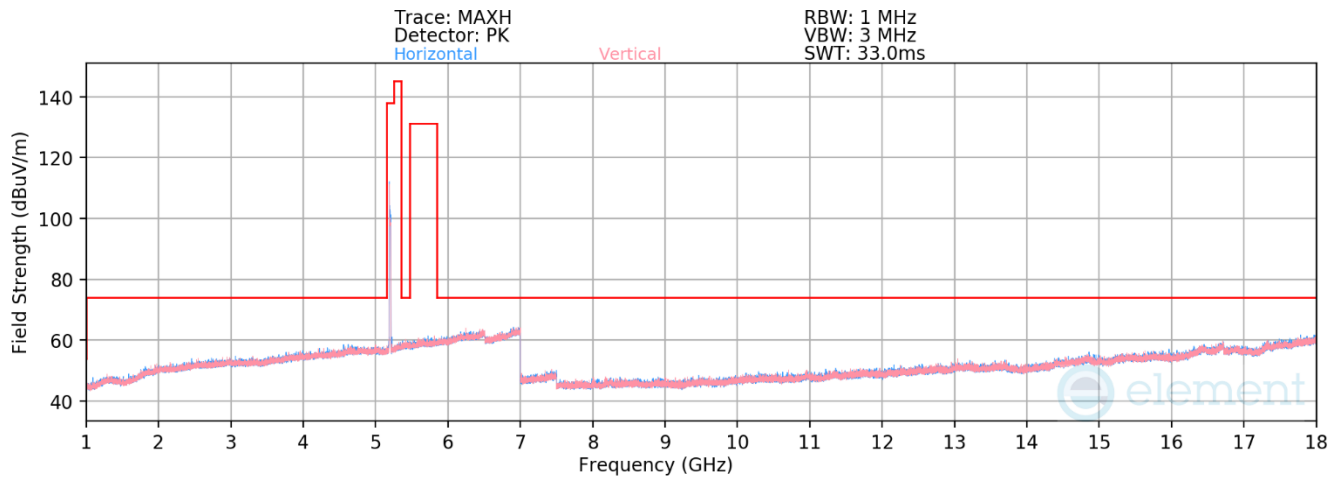


Plot 7-422. RSE above 1GHz Antenna WF4a (11ax – Ch.40 – RU26)

Mode: 802.11ax (20MHz BW)
Data Rate: MCS11
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5200MHz
Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10400.00	Peak	H	-	-	-68.70	9.87	48.17	68.20	-20.03
* 15600.00	Average	H	-	-	-81.68	14.80	40.12	53.98	-13.86
* 15600.00	Peak	H	-	-	-70.18	14.80	51.62	73.98	-22.36

Table 7-144. Radiated Measurements Antenna WF4a (RU26)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 177 of 278

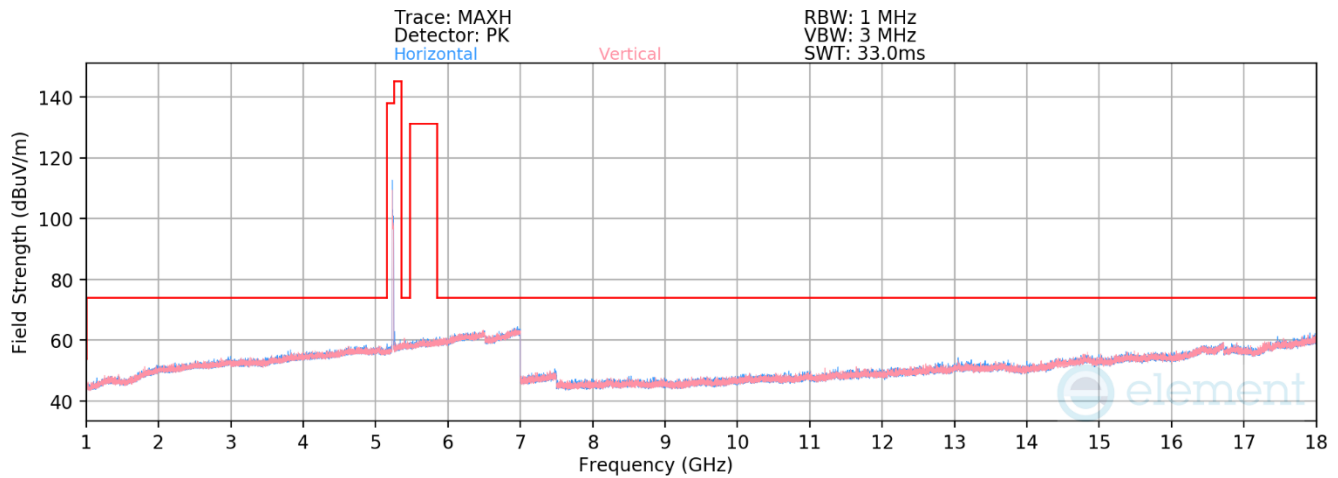

Plot 7-423. RSE above 1GHz Antenna WF4a (11ax – Ch.48 – RU26)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS11
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5240MHz
Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10480.00	Peak	H	-	-	-68.90	10.13	48.23	68.20	-19.97
* 15720.00	Average	H	-	-	-81.56	14.34	39.78	53.98	-14.20
* 15720.00	Peak	H	-	-	-70.20	14.34	51.14	73.98	-22.84

Table 7-145. Radiated Measurements Antenna WF4a (RU26)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 178 of 278

V 10.5 12/15/2021

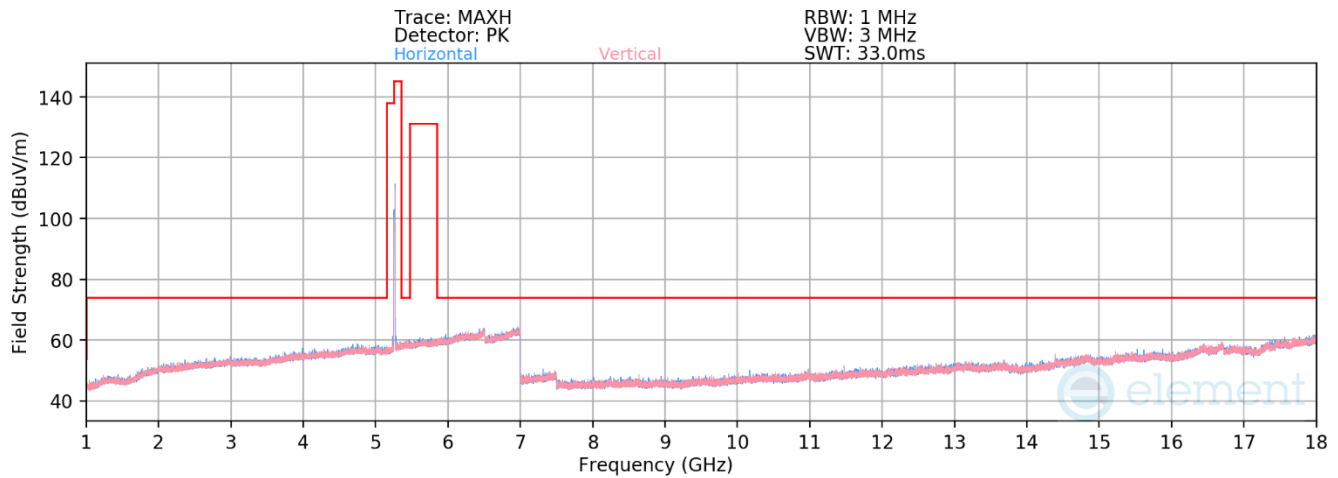

Plot 7-424. RSE above 1GHz Antenna WF4a (11ax – Ch.52 – RU52)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS11
RU Index: 38
Distance of Measurements: 3 Meters
Operating Frequency: 5260MHz
Channel: 52

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10520.00	Peak	H	-	-	-69.10	10.37	48.27	68.20	-19.93
* 15780.00	Average	H	-	-	-81.46	14.19	39.73	53.98	-14.25
* 15780.00	Peak	H	-	-	-70.15	14.19	51.04	73.98	-22.94

Table 7-146. Radiated Measurements Antenna WF4a (RU52)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 179 of 278

V 10.5 12/15/2021

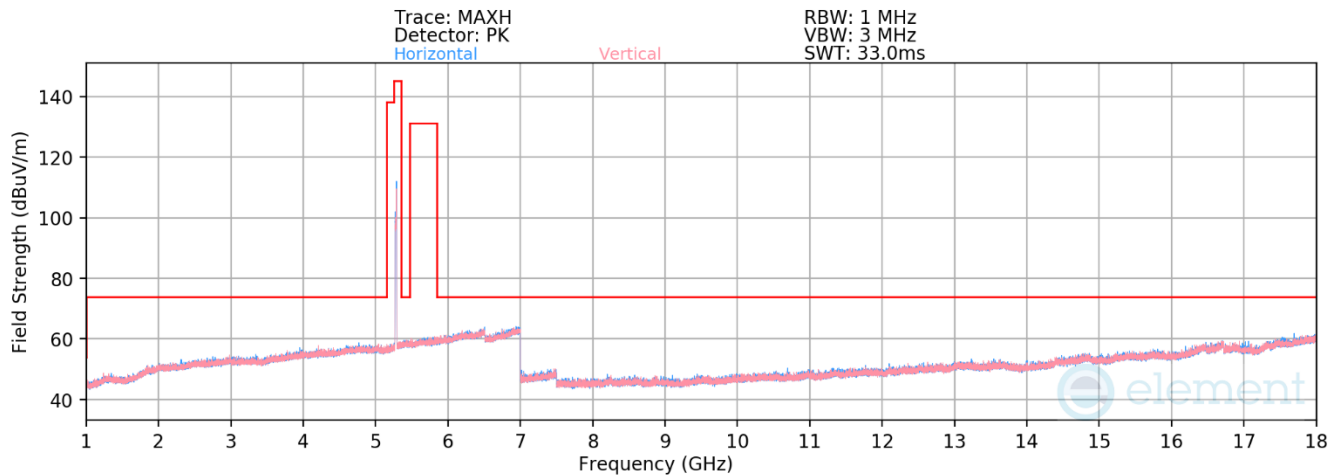

Plot 7-425. RSE above 1GHz Antenna WF4a (11ax – Ch.56 – RU52)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS11
RU Index: 38
Distance of Measurements: 3 Meters
Operating Frequency: 5280MHz
Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10560.00	Peak	H	-	-	-69.01	9.92	47.91	68.20	-20.29
* 15840.00	Average	H	-	-	-81.56	14.45	39.89	53.98	-14.09
* 15840.00	Peak	H	-	-	-70.22	14.45	51.23	73.98	-22.75

Table 7-147. Radiated Measurements Antenna WF4a (RU52)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 180 of 278

V 10.5 12/15/2021

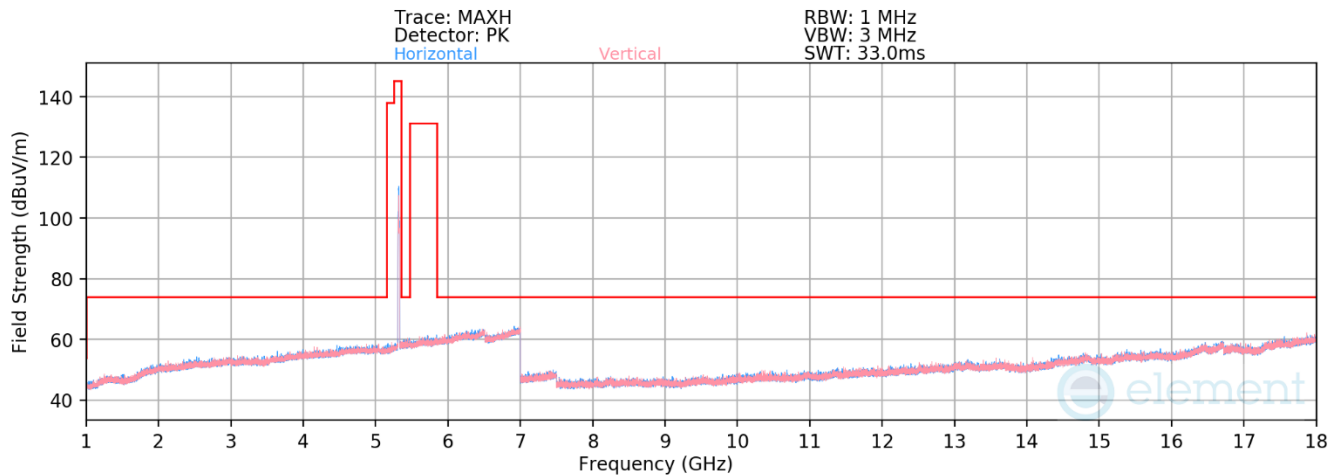

Plot 7-426. RSE above 1GHz Antenna WF4a (11ax – Ch.64 – RU52)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS11
RU Index: 38
Distance of Measurements: 3 Meters
Operating Frequency: 5320MHz
Channel: 64

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	10640.00	Average	H	-	-	-80.68	10.13	36.45	53.98	-17.53
*	10640.00	Peak	H	-	-	-68.57	10.13	48.56	73.98	-25.42
*	15960.00	Average	H	-	-	-81.31	14.94	40.63	53.98	-13.35
*	15960.00	Peak	H	-	-	-69.88	14.94	52.06	73.98	-21.92

Table 7-148. Radiated Measurements Antenna WF4a (RU52)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 181 of 278

V 10.5 12/15/2021

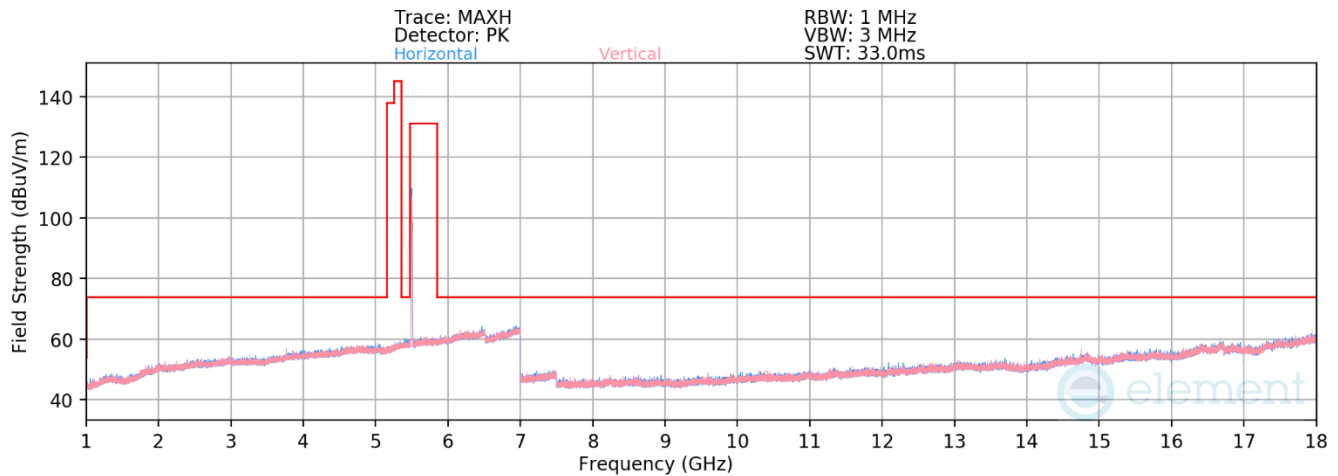

Plot 7-427. RSE above 1GHz Antenna WF4a (11ax – Ch.100 – RU52)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS11
RU Index: 38
Distance of Measurements: 3 Meters
Operating Frequency: 5500MHz
Channel: 100

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11000.00	Average	H	-	-	-81.58	10.96	36.38	53.98	-17.60
*	11000.00	Peak	H	-	-	-70.06	10.96	47.90	73.98	-26.08
	16500.00	Peak	H	-	-	-72.39	17.98	52.59	68.20	-15.61

Table 7-149. Radiated Measurements Antenna WF4a (RU52)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 182 of 278

V 10.5 12/15/2021

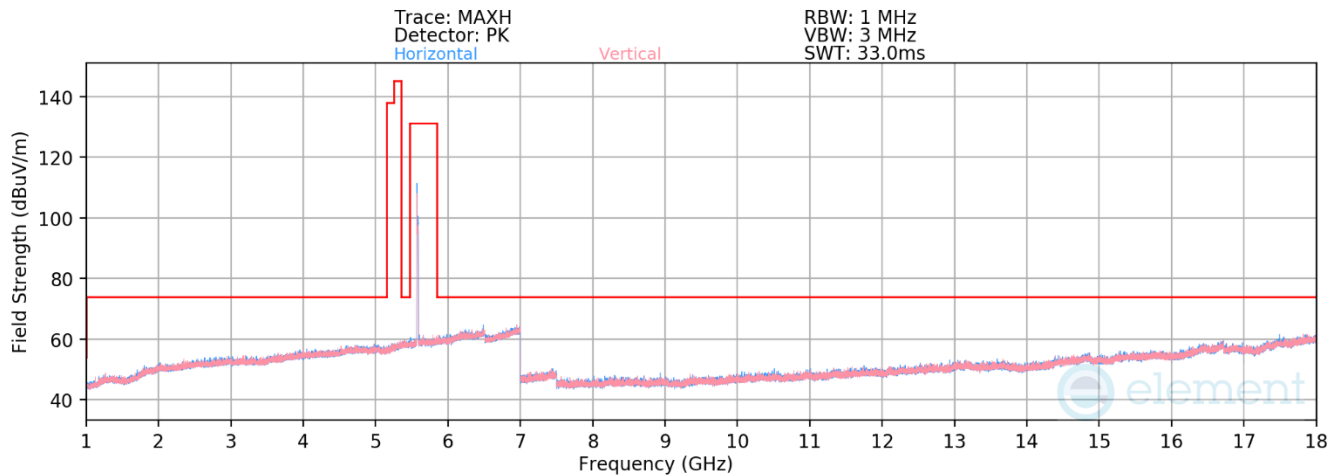

Plot 7-428. RSE above 1GHz Antenna WF4a (11ax – Ch.116 – RU52)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS11
RU Index: 38
Distance of Measurements: 3 Meters
Operating Frequency: 5580MHz
Channel: 116

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11160.00	Average	H	-	-	-80.99	10.39	36.40	53.98	-17.58
*	11160.00	Peak	H	-	-	-69.86	10.39	47.53	73.98	-26.45
	16740.00	Peak	H	-	-	-71.33	17.57	53.24	68.20	-14.96

Table 7-150. Radiated Measurements Antenna WF4a (RU52)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 183 of 278

V 10.5 12/15/2021

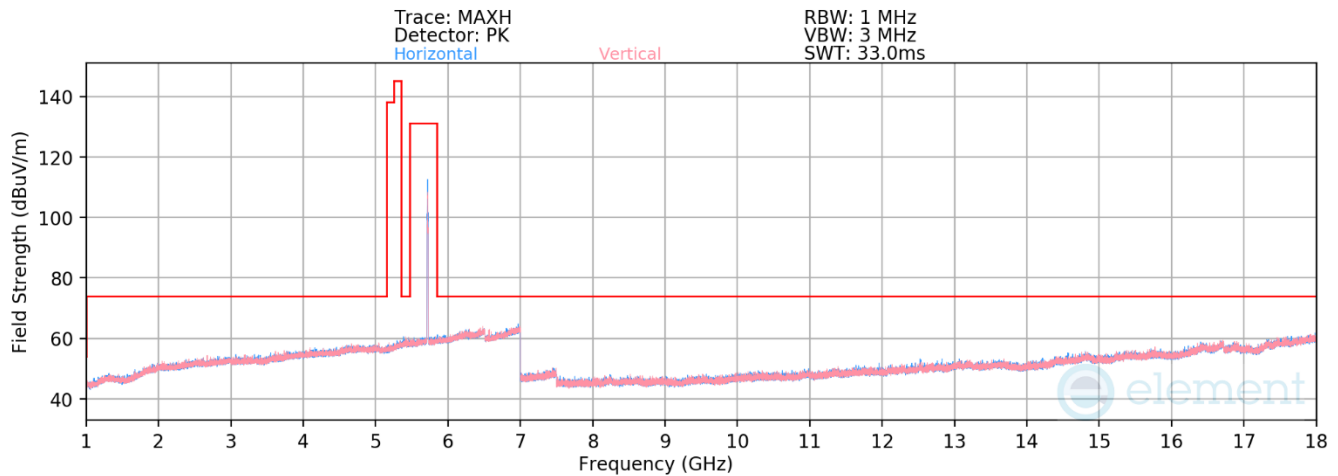

Plot 7-429. RSE above 1GHz Antenna WF4a (11ax – Ch.144 – RU52)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS11
RU Index: 38
Distance of Measurements: 3 Meters
Operating Frequency: 5720MHz
Channel: 144

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11440.00	Average	H	-	-	-81.30	10.79	36.49	53.98	-17.49
*	11440.00	Peak	H	-	-	-70.25	10.79	47.54	73.98	-26.44
	17160.00	Peak	H	-	-	-72.53	18.62	53.09	68.20	-15.11

Table 7-151. Radiated Measurements Antenna WF4a (RU52)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 184 of 278

V 10.5 12/15/2021

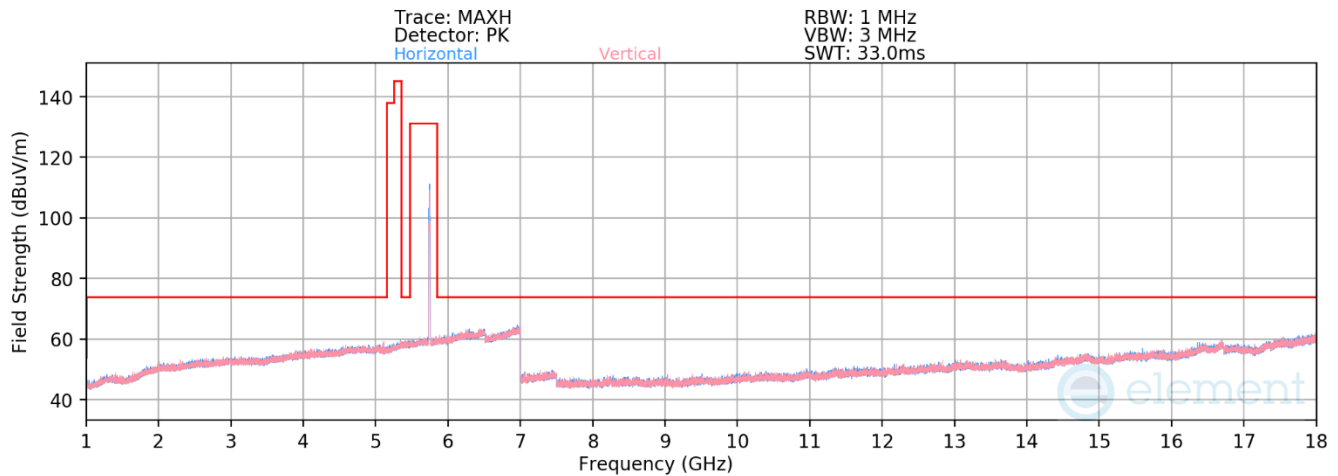

Plot 7-430. RSE above 1GHz Antenna WF4a (11ax – Ch.149 – RU26)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS11
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5745MHz
Channel: 149

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11490.00	Average	H	-	-	-81.29	10.82	36.53	53.98	-17.45
*	11490.00	Peak	H	-	-	-70.28	10.82	47.54	73.98	-26.44
	17235.00	Peak	H	-	-	-72.74	18.44	52.70	68.20	-15.50

Table 7-152. Radiated Measurements Antenna WF4a (RU26)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 185 of 278

V 10.5 12/15/2021

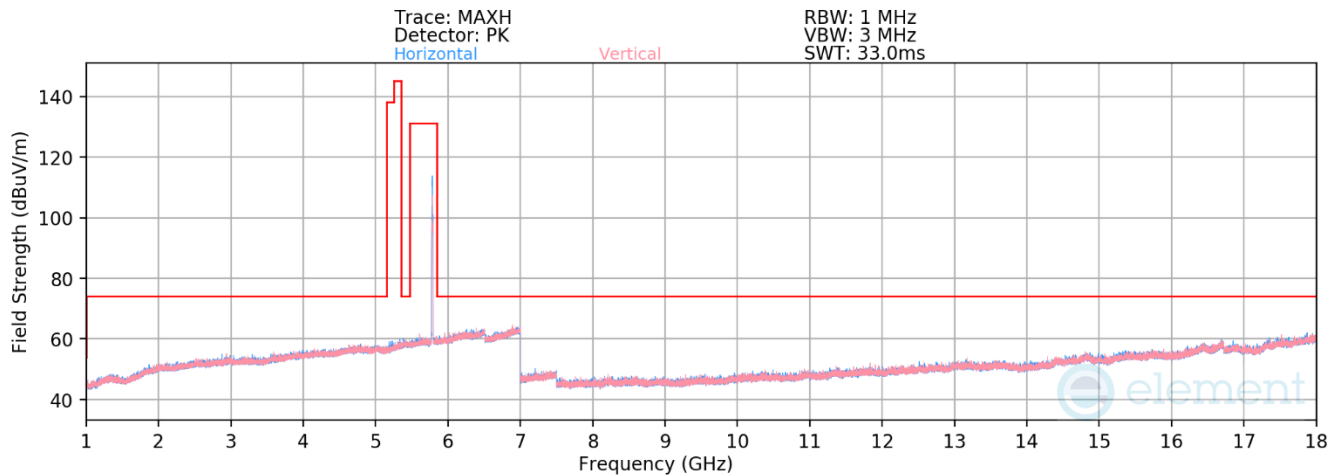

Plot 7-431. RSE above 1GHz Antenna WF4a (11ax – Ch.157 – RU26)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS11
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5785MHz
Channel: 157

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11570.00	Average	H	-	-	-81.54	10.97	36.43	53.98	-17.55
*	11570.00	Peak	H	-	-	-70.28	10.97	47.69	73.98	-26.29
	17355.00	Peak	H	-	-	-73.36	19.31	52.95	68.20	-15.25

Table 7-153. Radiated Measurements Antenna WF4a (RU26)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 186 of 278

V 10.5 12/15/2021

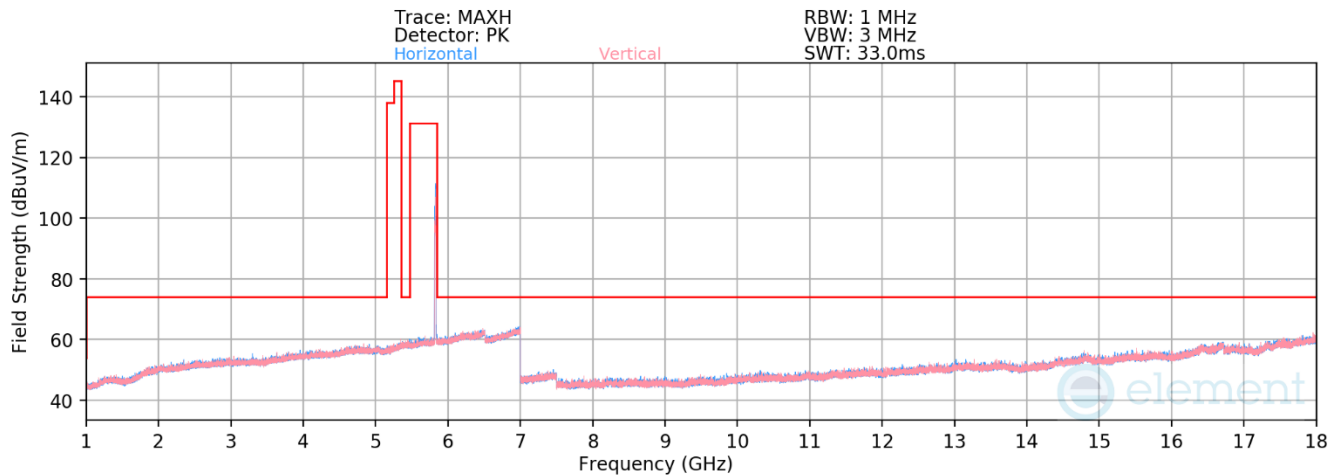

Plot 7-432. RSE above 1GHz Antenna WF4a (11ax – Ch.165 – RU26)

Mode: 802.11ax (20MHz BW)
Data Rate: MCS11
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5825MHz
Channel: 165


	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11650.00	Average	H	-	-	-81.64	11.13	36.49	53.98	-17.49
*	11650.00	Peak	H	-	-	-70.46	11.13	47.67	73.98	-26.31
	17475.00	Peak	H	-	-	-74.17	21.67	54.50	68.20	-13.70

Table 7-154. Radiated Measurements Antenna WF4a (RU26)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 187 of 278

V 10.5 12/15/2021

RU242

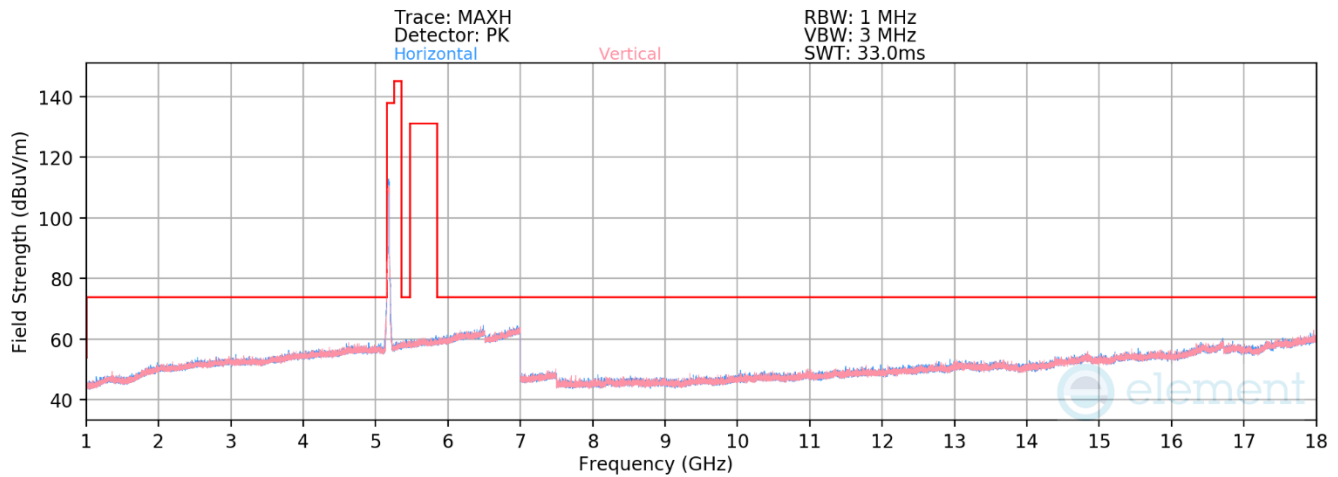

Plot 7-433. RSE above 1GHz Antenna WF4a (11ax – Ch.36 – RU242)


Mode:	802.11ax (20MHz BW)
Data Rate:	MCS11
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	5180MHz
Channel:	36

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10360.00	Peak	H	-	-	-69.70	10.05	47.35	68.20	-20.85
* 15540.00	Average	H	-	-	-82.00	15.23	40.23	53.98	-13.75
* 15540.00	Peak	H	-	-	-70.59	15.23	51.64	73.98	-22.34

Table 7-155. Radiated Measurements Antenna WF4a (RU242)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 188 of 278

V 10.5 12/15/2021

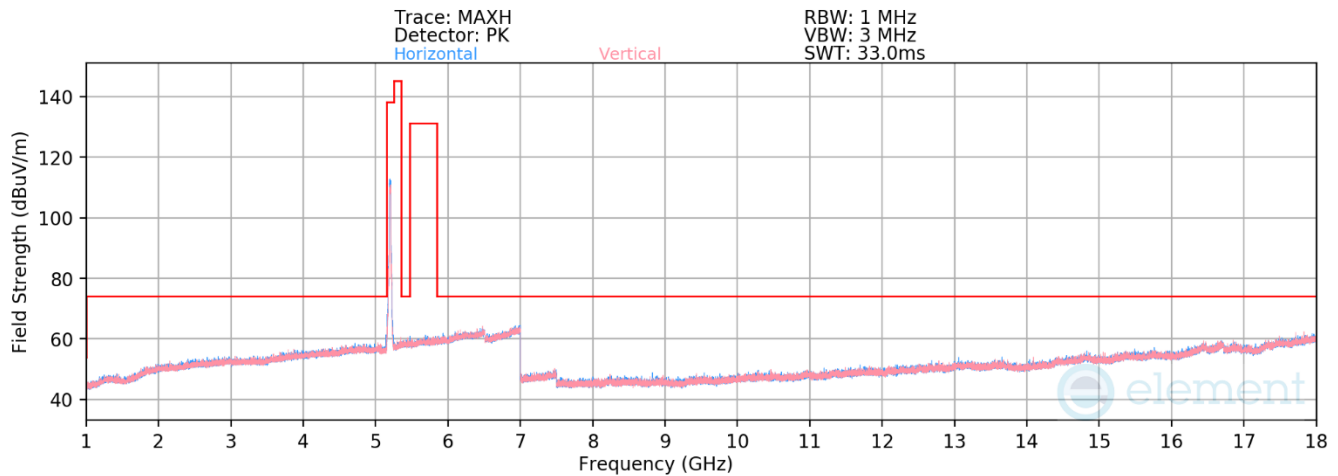

Plot 7-434. RSE above 1GHz Antenna WF4a (11ax – Ch.40 – RU242)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS11
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5200MHz
Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10400.00	Peak	H	-	-	-69.14	9.87	47.73	68.20	-20.47
* 15600.00	Average	H	-	-	-81.69	14.80	40.11	53.98	-13.87
* 15600.00	Peak	H	-	-	-70.15	14.80	51.65	73.98	-22.33

Table 7-156. Radiated Measurements Antenna WF4a (RU242)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 189 of 278

V 10.5 12/15/2021

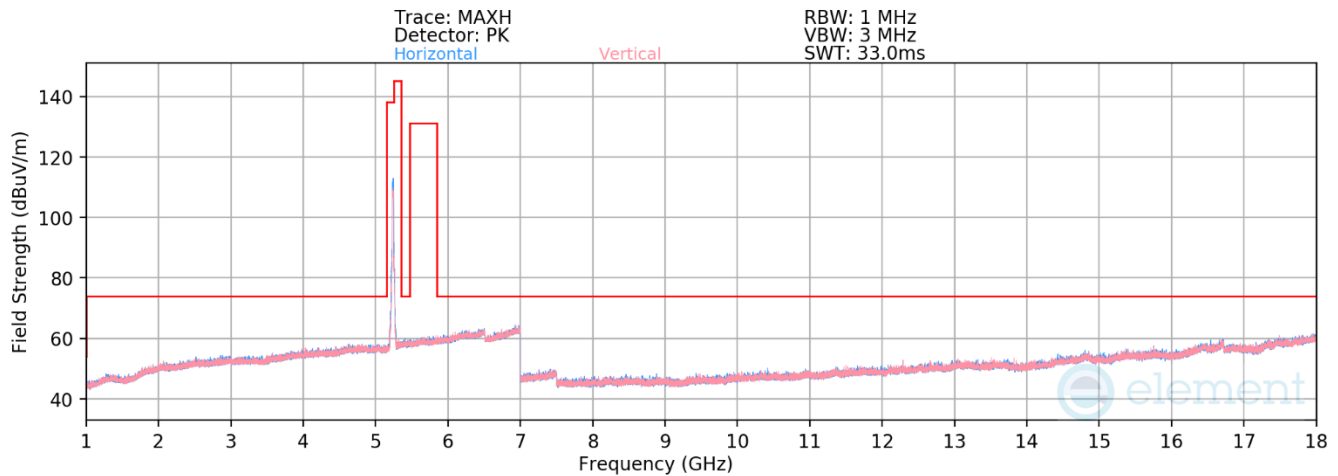

Plot 7-435. RSE above 1GHz Antenna WF4a (11ax – Ch.48 – RU242)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS11
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5240MHz
Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10480.00	Peak	H	-	-	-69.47	10.13	47.66	68.20	-20.54
* 15720.00	Average	H	-	-	-81.44	14.34	39.90	53.98	-14.08
* 15720.00	Peak	H	-	-	-69.90	14.34	51.44	73.98	-22.54

Table 7-157. Radiated Measurements Antenna WF4a (RU242)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 190 of 278

V 10.5 12/15/2021

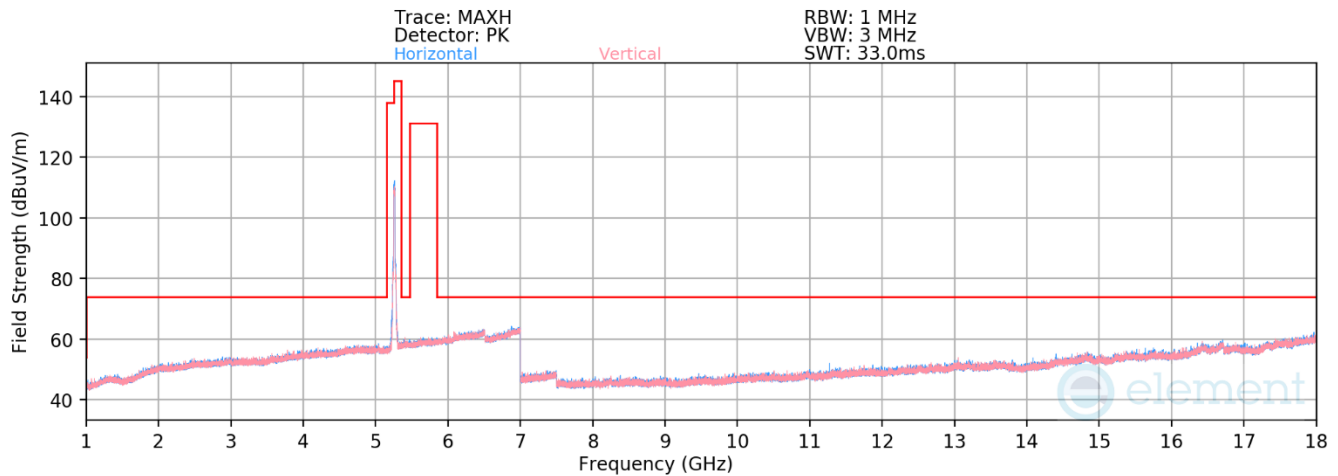

Plot 7-436. RSE above 1GHz Antenna WF4a (11ax – Ch.52 – RU242)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS11
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5260MHz
Channel: 52

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10520.00	Peak	H	-	-	-69.72	10.37	47.65	68.20	-20.55
* 15780.00	Average	H	-	-	-82.23	14.19	38.96	53.98	-15.02
* 15780.00	Peak	H	-	-	-71.13	14.19	50.06	73.98	-23.92

Table 7-158. Radiated Measurements Antenna WF4a (RU242)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 191 of 278

V 10.5 12/15/2021

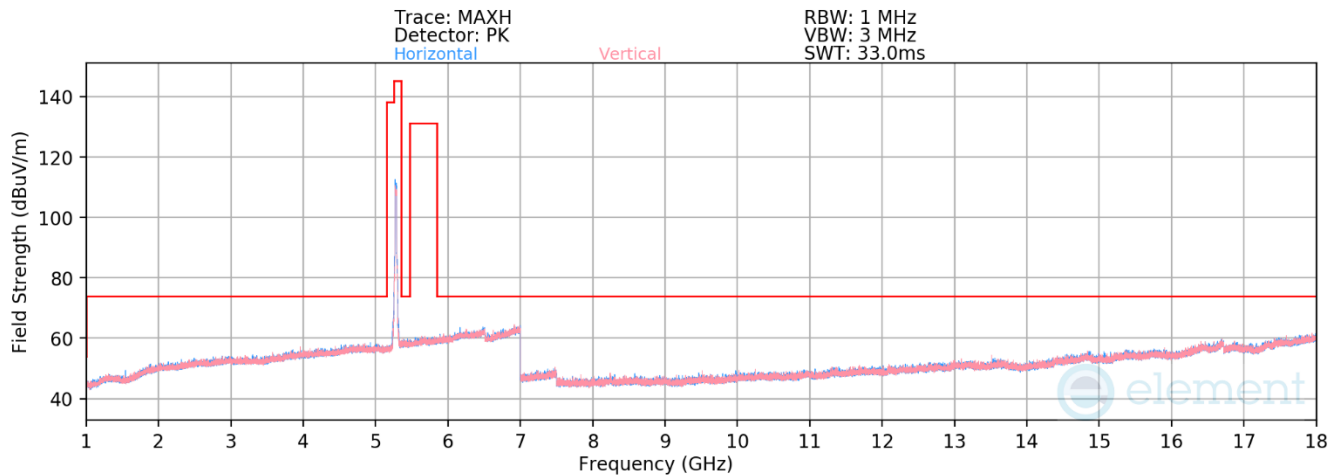

Plot 7-437. RSE above 1GHz Antenna WF4a (11ax – Ch.56 – RU242)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS11
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5280MHz
Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10560.00	Peak	H	-	-	-69.96	9.92	46.96	68.20	-21.24
* 15840.00	Average	H	-	-	-82.03	14.45	39.42	53.98	-14.56
* 15840.00	Peak	H	-	-	-70.84	14.45	50.61	73.98	-23.37

Table 7-159. Radiated Measurements Antenna WF4a (RU242)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 192 of 278

V 10.5 12/15/2021

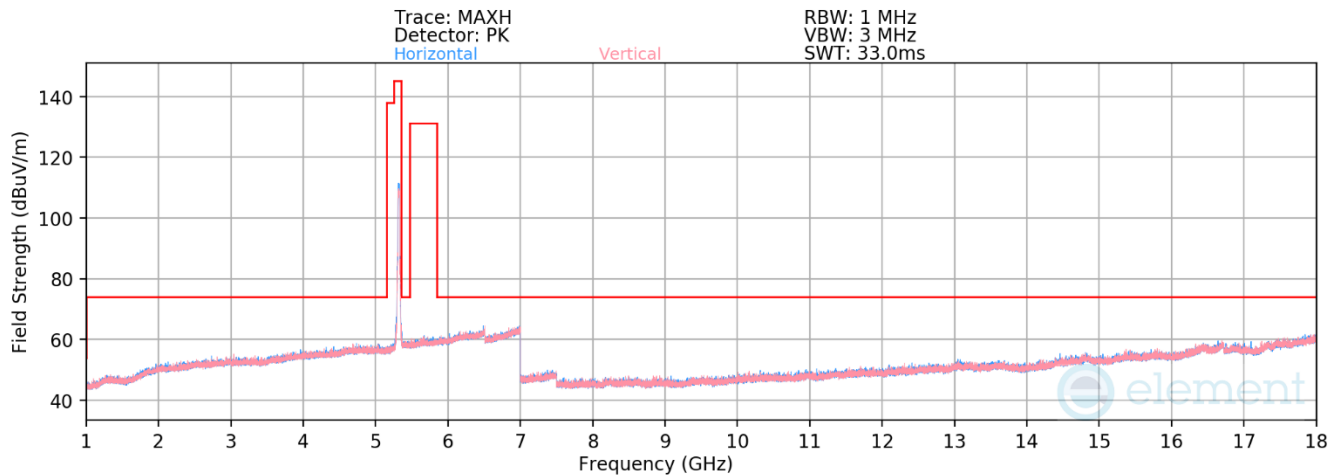

Plot 7-438. RSE above 1GHz Antenna WF4a (11ax – Ch.64 – RU242)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS11
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5320MHz
Channel: 64

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	10640.00	Average	H	-	-	-81.33	10.13	35.80	53.98	-18.18
*	10640.00	Peak	H	-	-	-70.11	10.13	47.02	73.98	-26.96
*	15960.00	Average	H	-	-	-82.32	14.94	39.62	53.98	-14.36
*	15960.00	Peak	H	-	-	-71.39	14.94	50.55	73.98	-23.43

Table 7-160. Radiated Measurements Antenna WF4a (RU242)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 193 of 278

V 10.5 12/15/2021

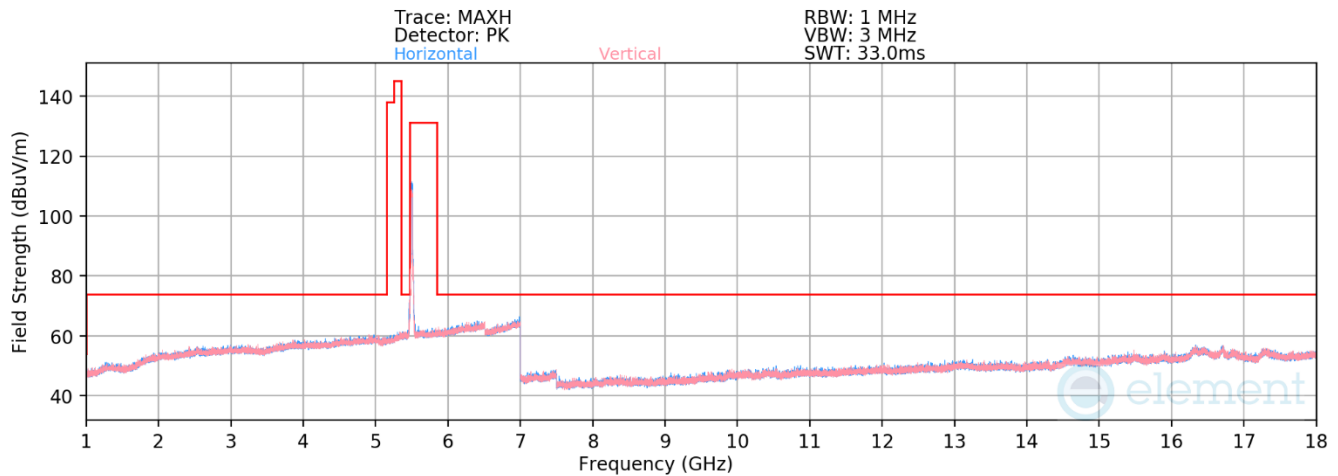

Plot 7-439. RSE above 1GHz Antenna WF4a (11ax – Ch.100 – RU242)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS11
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5500MHz
Channel: 100

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11000.00	Average	H	-	-	-80.40	10.96	37.56	53.98	-16.42
*	11000.00	Peak	H	-	-	-67.65	10.96	50.31	73.98	-23.67
	16500.00	Peak	H	-	-	-71.22	17.98	53.76	68.20	-14.44

Table 7-161. Radiated Measurements Antenna WF4a (RU242)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 194 of 278

V 10.5 12/15/2021

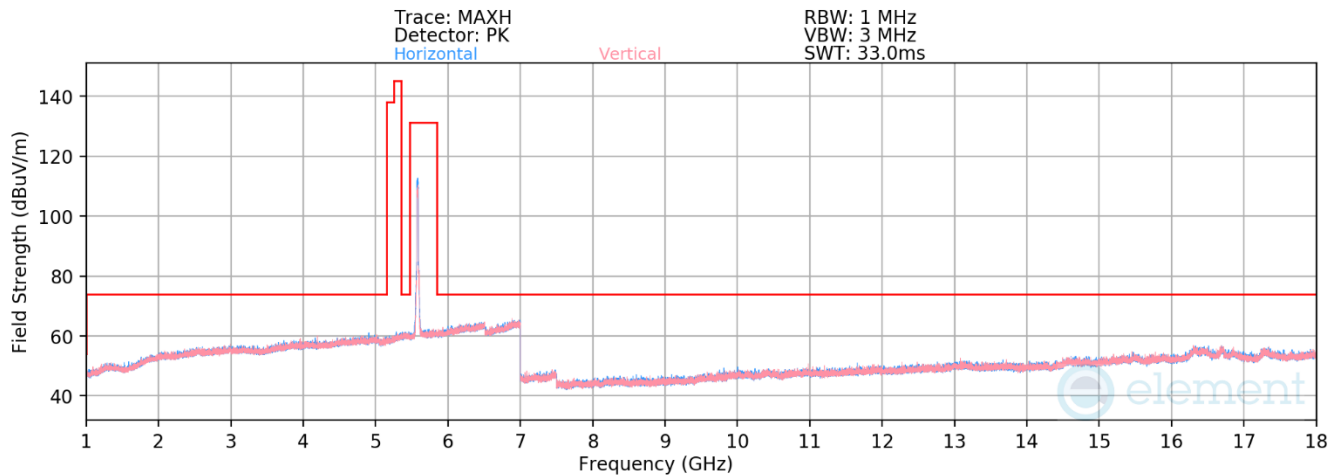

Plot 7-440. RSE above 1GHz Antenna WF4a (11ax – Ch.116 – RU242)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS11
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5580MHz
Channel: 116

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11160.00	Average	H	-	-	-80.49	10.39	36.90	53.98	-17.08
*	11160.00	Peak	H	-	-	-68.73	10.39	48.66	73.98	-25.32
	16740.00	Peak	H	-	-	-69.86	17.57	54.71	68.20	-13.49

Table 7-162. Radiated Measurements Antenna WF4a (RU242)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 195 of 278

V 10.5 12/15/2021

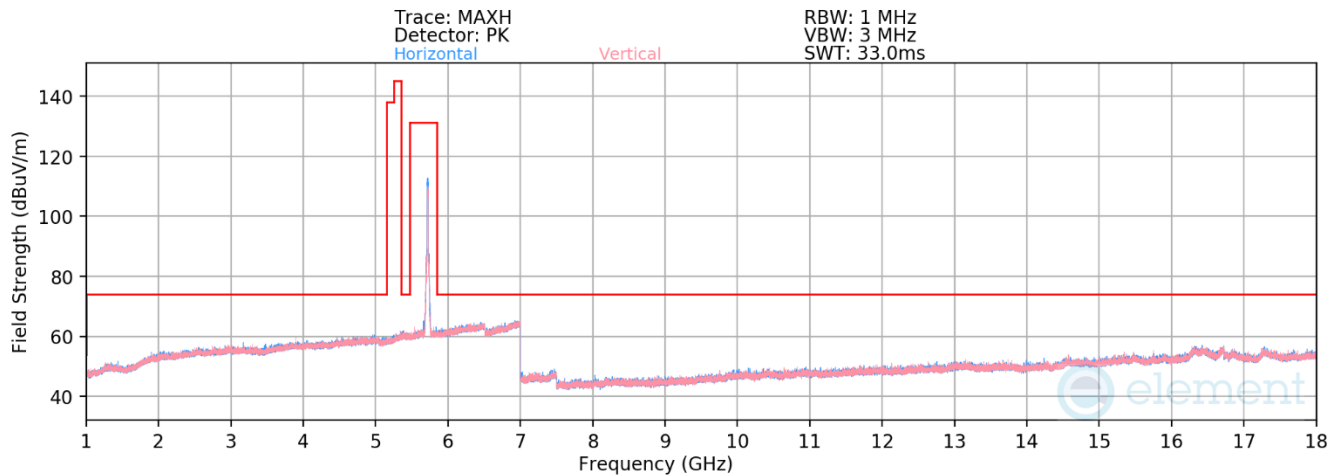

Plot 7-441. RSE above 1GHz Antenna WF4a (11ax – Ch.144 – RU242)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS11
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5720MHz
Channel: 144

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11440.00	Average	H	-	-	-81.45	10.79	36.34	53.98	-17.64
*	11440.00	Peak	H	-	-	-69.64	10.79	48.15	73.98	-25.83
	17160.00	Peak	H	-	-	-72.34	18.62	53.28	68.20	-14.92

Table 7-163. Radiated Measurements Antenna WF4a (RU242)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 196 of 278

V 10.5 12/15/2021

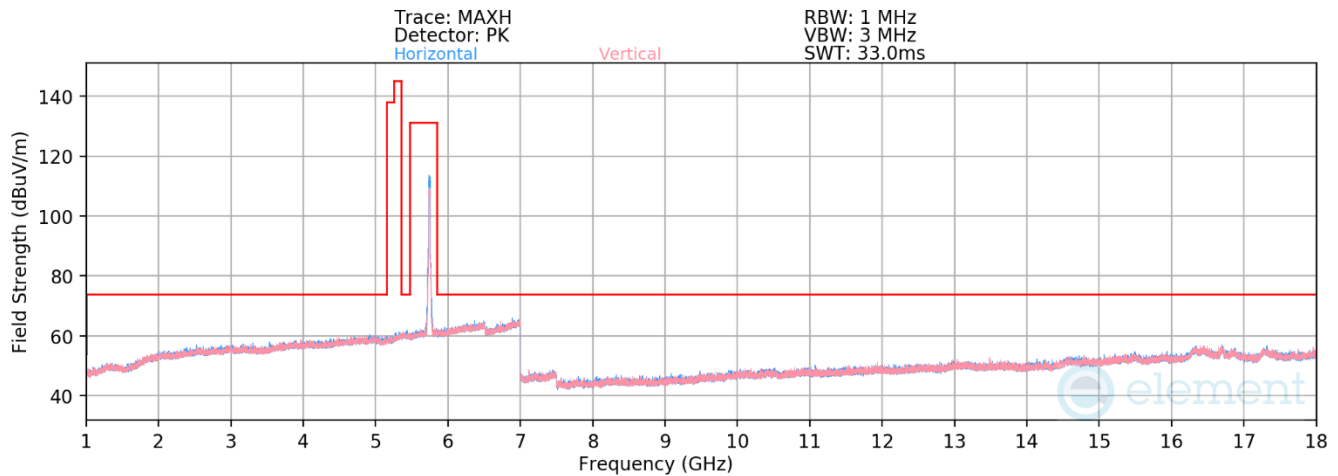

Plot 7-442. RSE above 1GHz Antenna WF4a (11ax – Ch.149 – RU242)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS11
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5745MHz
Channel: 149

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11490.00	Average	H	-	-	-81.38	10.82	36.44	53.98	-17.54
*	11490.00	Peak	H	-	-	-70.04	10.82	47.78	73.98	-26.20
	17235.00	Peak	H	-	-	-72.64	18.44	52.80	68.20	-15.40

Table 7-164. Radiated Measurements Antenna WF4a (RU242)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 197 of 278

V 10.5 12/15/2021

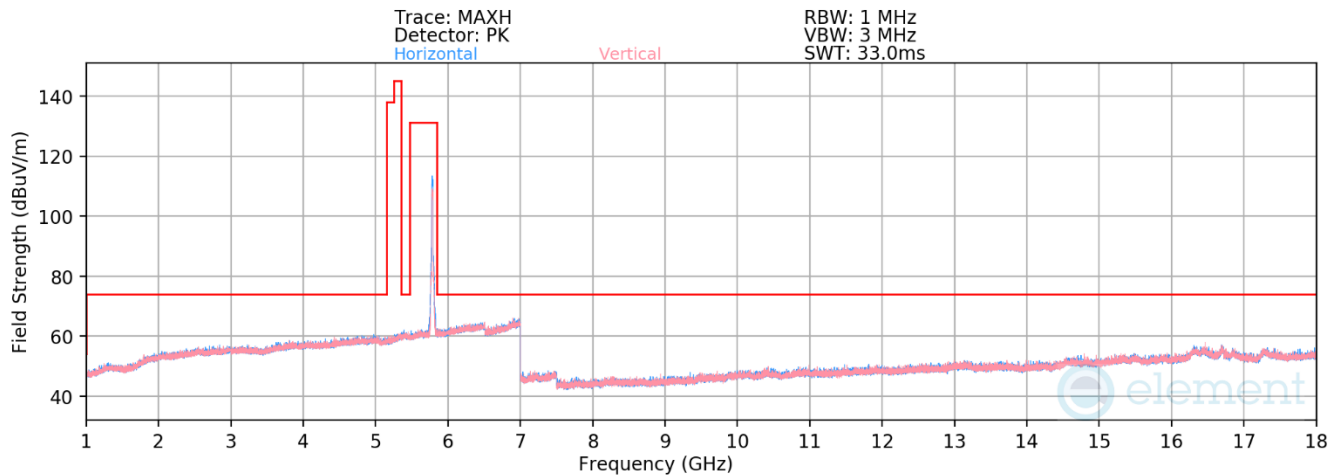

Plot 7-443. RSE above 1GHz Antenna WF4a (11ax – Ch.157 – RU242)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS11
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5785MHz
Channel: 157

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11570.00	Average	H	-	-	-81.60	10.97	36.37	53.98	-17.61
*	11570.00	Peak	H	-	-	-70.16	10.97	47.81	73.98	-26.17
	17355.00	Peak	H	-	-	-73.33	19.31	52.98	68.20	-15.22

Table 7-165. Radiated Measurements Antenna WF4a (RU242)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 198 of 278

V 10.5 12/15/2021

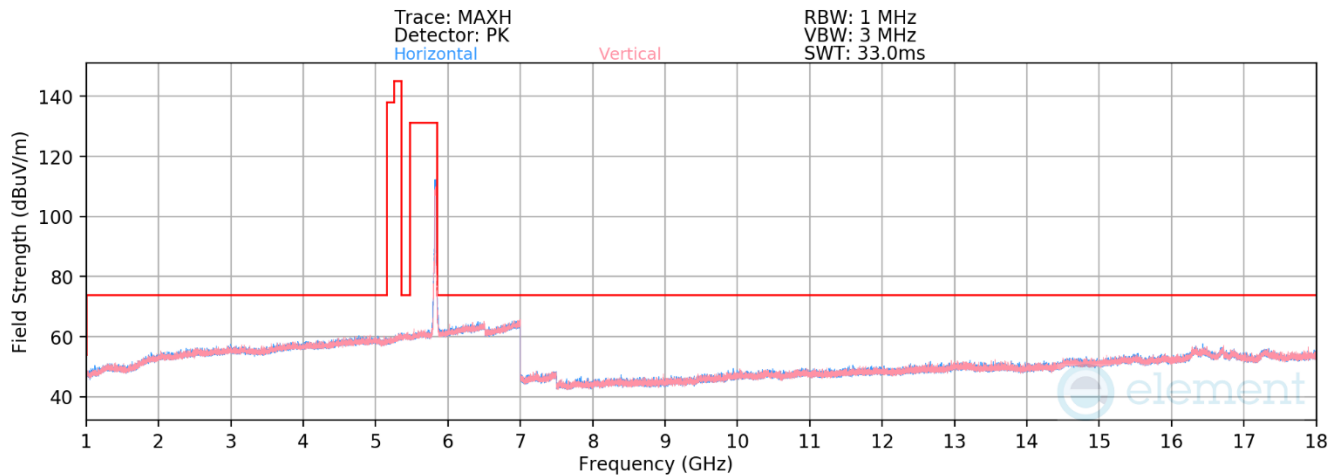

Plot 7-444. RSE above 1GHz Antenna WF4a (11ax – Ch.165 – RU242)

Mode: 802.11ax (20MHz BW)
Data Rate: MCS11
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5825MHz
Channel: 165

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11650.00	Average	H	-	-	-81.56	11.13	36.57	53.98	-17.41
* 11650.00	Peak	H	-	-	-69.30	11.13	48.83	73.98	-25.15
17475.00	Peak	H	-	-	-74.44	21.67	54.23	68.20	-13.97


Table 7-166. Radiated Measurements Antenna WF4a (RU242)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 199 of 278

V 10.5 12/15/2021

7.6.3 CDD Radiated Spurious Emissions

RU26/52

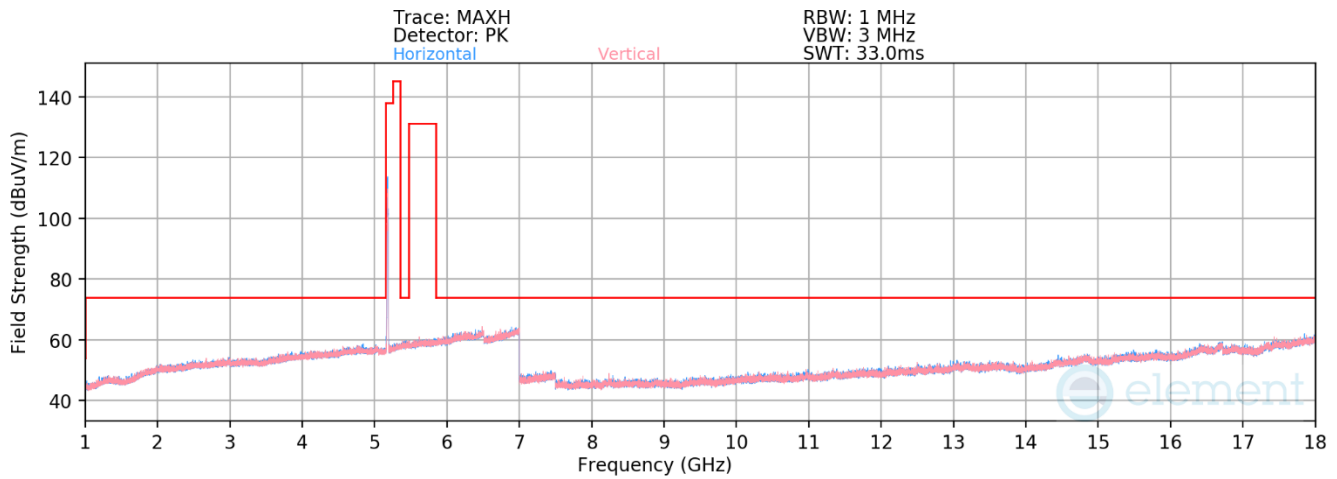

Plot 7-445. RSE above 1GHz CDD (11ax – Ch.36 – RU26)


Mode:	802.11ax (20MHz BW)
Data Rate:	MCS11
RU Index:	4
Distance of Measurements:	3 Meters
Operating Frequency:	5180MHz
Channel:	36

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10360.00	Peak	H	-	-	-69.67	10.05	47.38	68.20	-20.82
* 15540.00	Average	H	-	-	-82.78	15.23	39.45	53.98	-14.53
* 15540.00	Peak	H	-	-	-70.81	15.23	51.42	73.98	-22.56


Table 7-167. Radiated Measurements CDD (RU26)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 200 of 278

V 10.5 12/15/2021

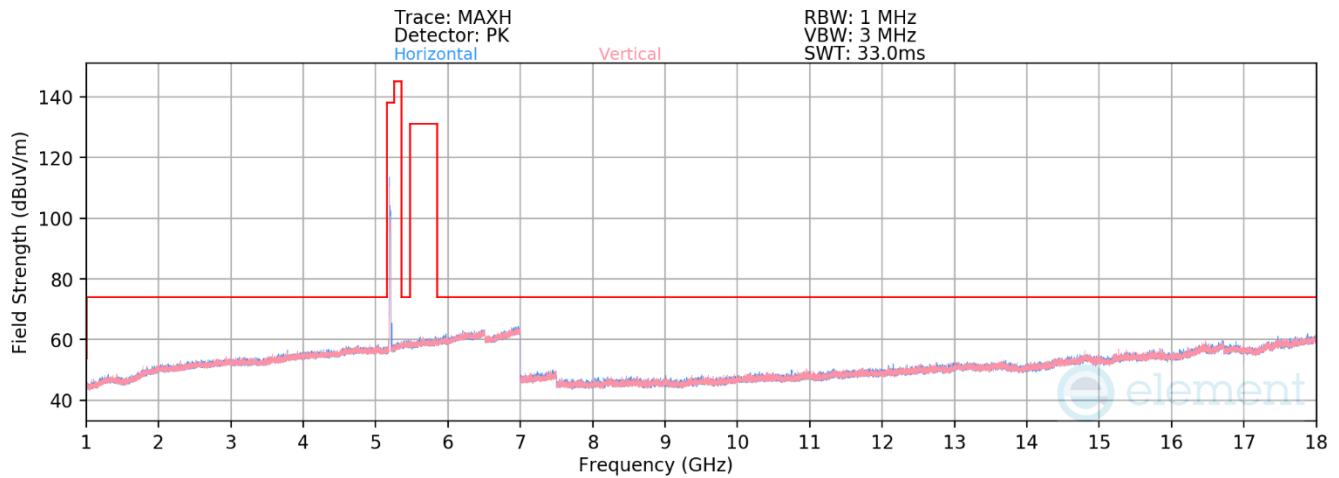

Plot 7-446. RSE above 1GHz CDD (11ax – Ch.40 – RU26)

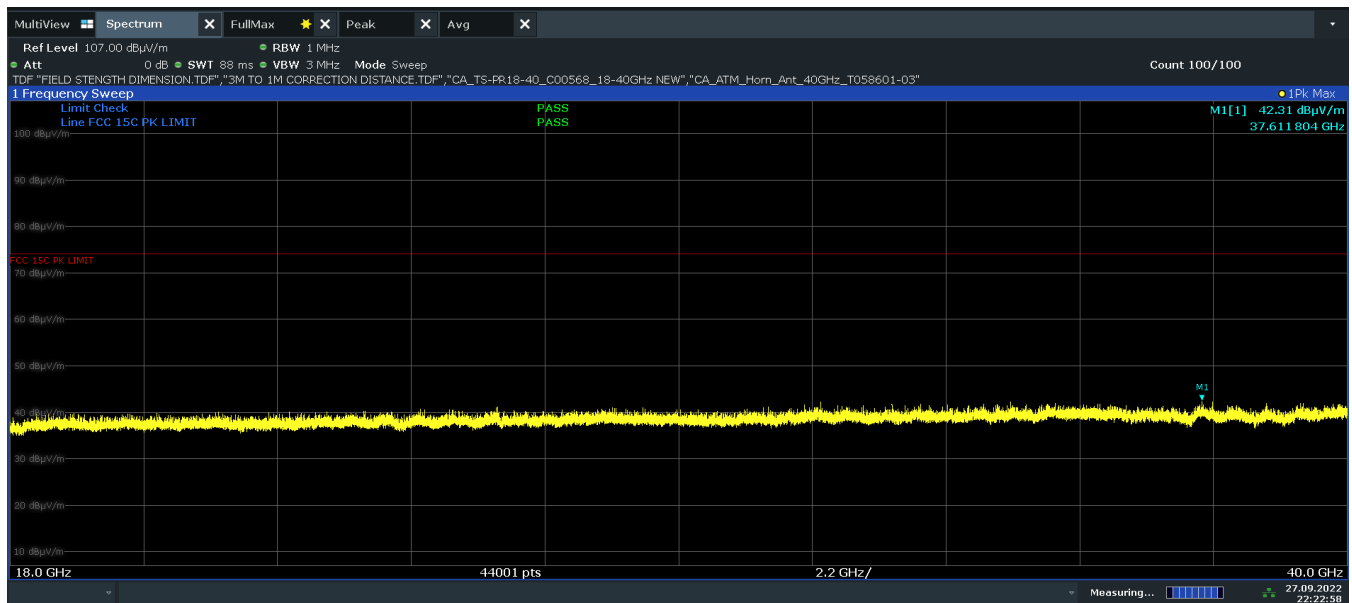


Plot 7-447. RSE 18GHz – 40 GHz CDD (11ax Ch.40 — RU26, Pol. H)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 201 of 278

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

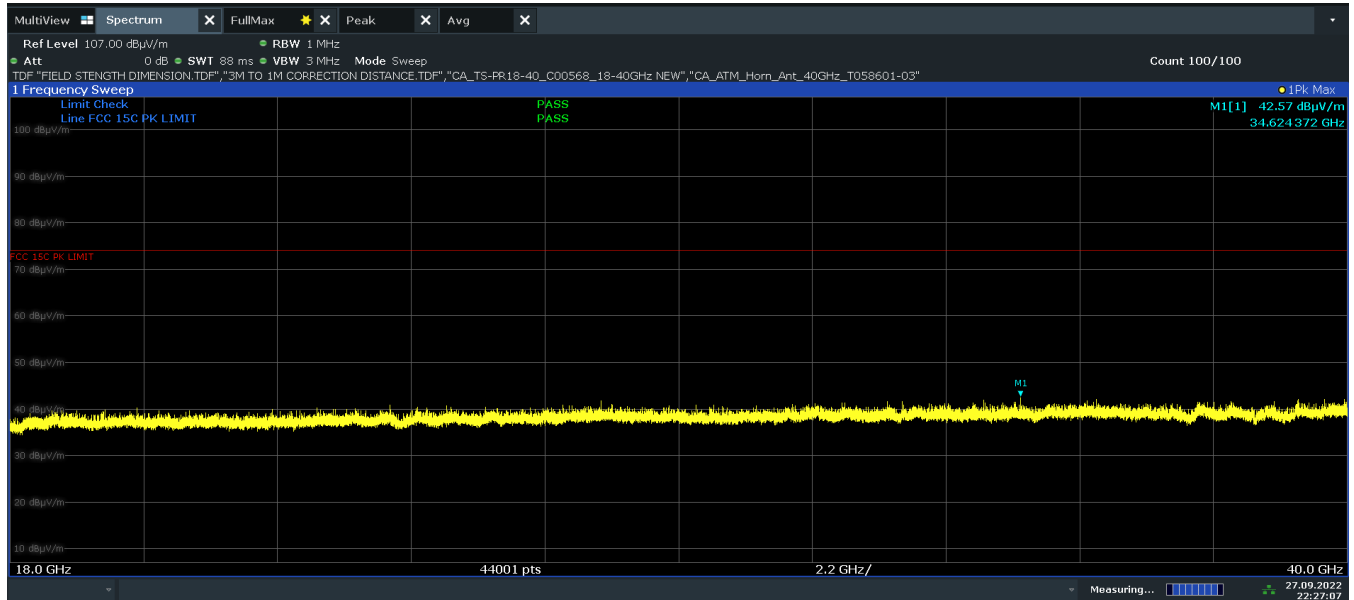


Plot 7-448. RSE 18 GHz - 40GHz CDD (11ax Ch.40 — RU26, Pol. V)

Mode: 802.11ax (20MHz BW)
 Data Rate: MCS11
 RU Index: 4
 Distance of Measurements: 3 Meters
 Operating Frequency: 5200MHz
 Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10400.00	Peak	H	-	-	-69.53	9.87	47.34	68.20	-20.86
* 15600.00	Average	H	-	-	-82.69	14.80	39.11	53.98	-14.87
* 15600.00	Peak	H	-	-	-71.52	14.80	50.28	73.98	-23.70

Table 7-168. Radiated Measurements CDD (RU26)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 202 of 278

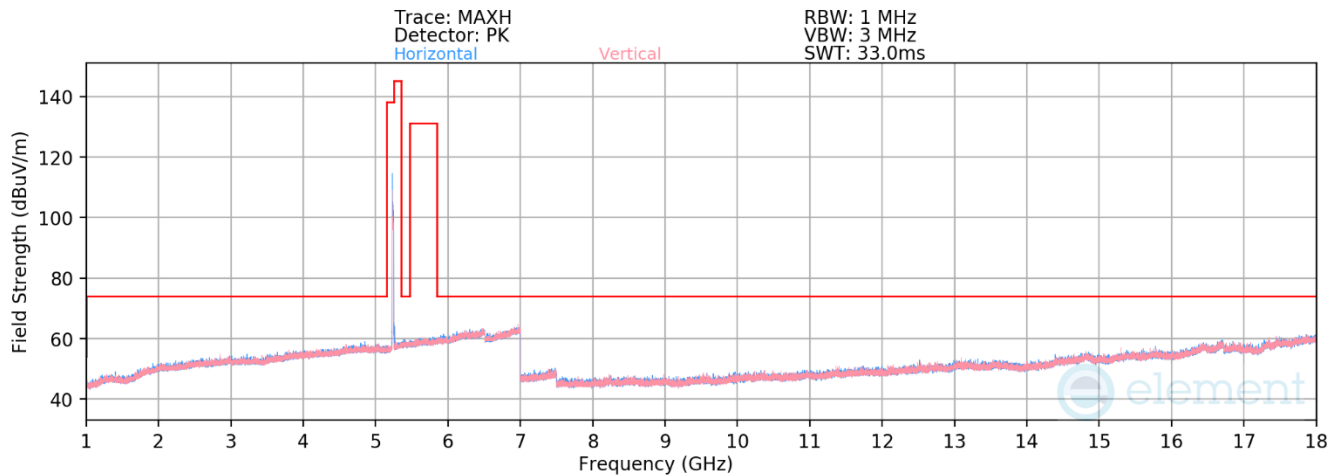

Plot 7-449. RSE above 1GHz CDD (11ax – Ch.48 – RU26)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS11
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5240MHz
Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10480.00	Peak	H	-	-	-70.36	10.13	46.77	68.20	-21.43
* 15720.00	Average	H	-	-	-82.32	14.34	39.02	53.98	-14.96
* 15720.00	Peak	H	-	-	-71.07	14.34	50.27	73.98	-23.71

Table 7-169. Radiated Measurements CDD (RU26)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 203 of 278

V 10.5 12/15/2021

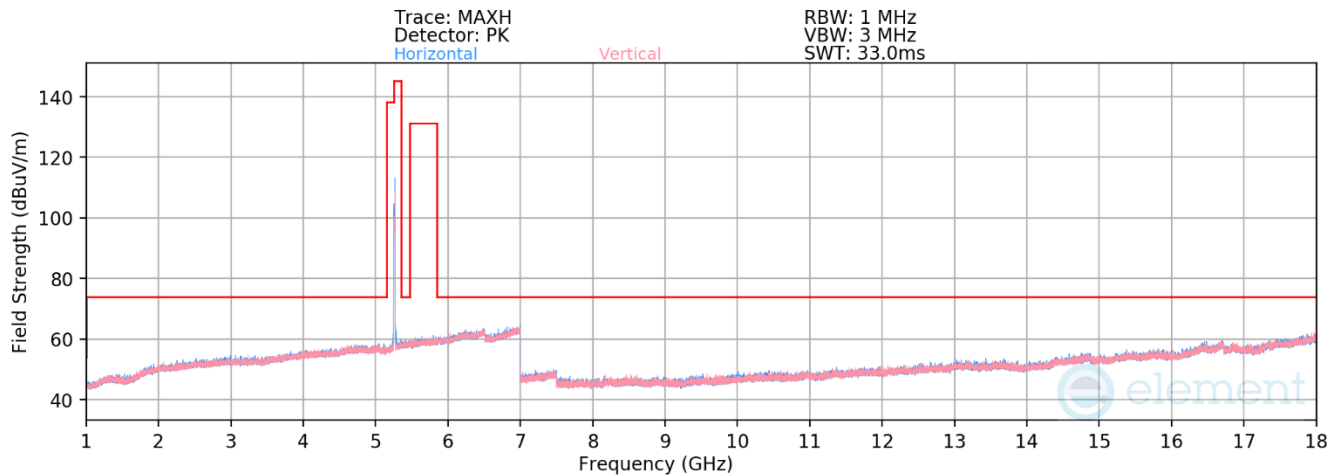

Plot 7-450. RSE above 1GHz CDD (11ax – Ch.52 – RU52)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS11
RU Index: 38
Distance of Measurements: 3 Meters
Operating Frequency: 5260MHz
Channel: 52

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10520.00	Peak	H	-	-	-69.83	10.37	47.54	68.20	-20.66
* 15780.00	Average	H	-	-	-82.34	14.19	38.85	53.98	-15.13
* 15780.00	Peak	H	-	-	-71.44	14.19	49.75	73.98	-24.23


Table 7-170. Radiated Measurements CDD (RU52)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 204 of 278

V 10.5 12/15/2021

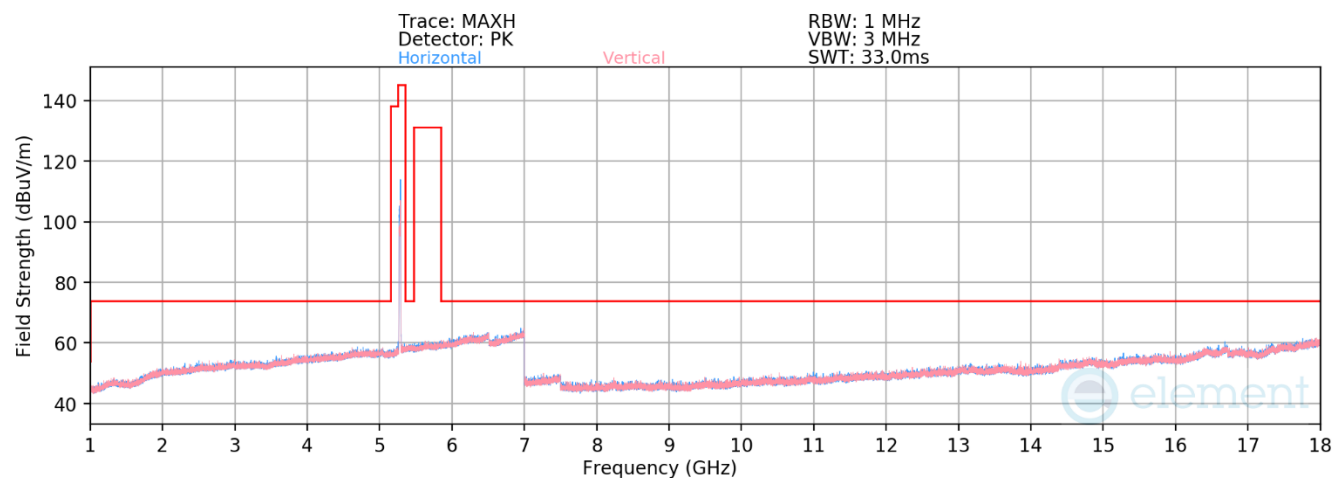


Plot 7-451. RSE above 1GHz CDD (11ax – Ch.56 – RU52)

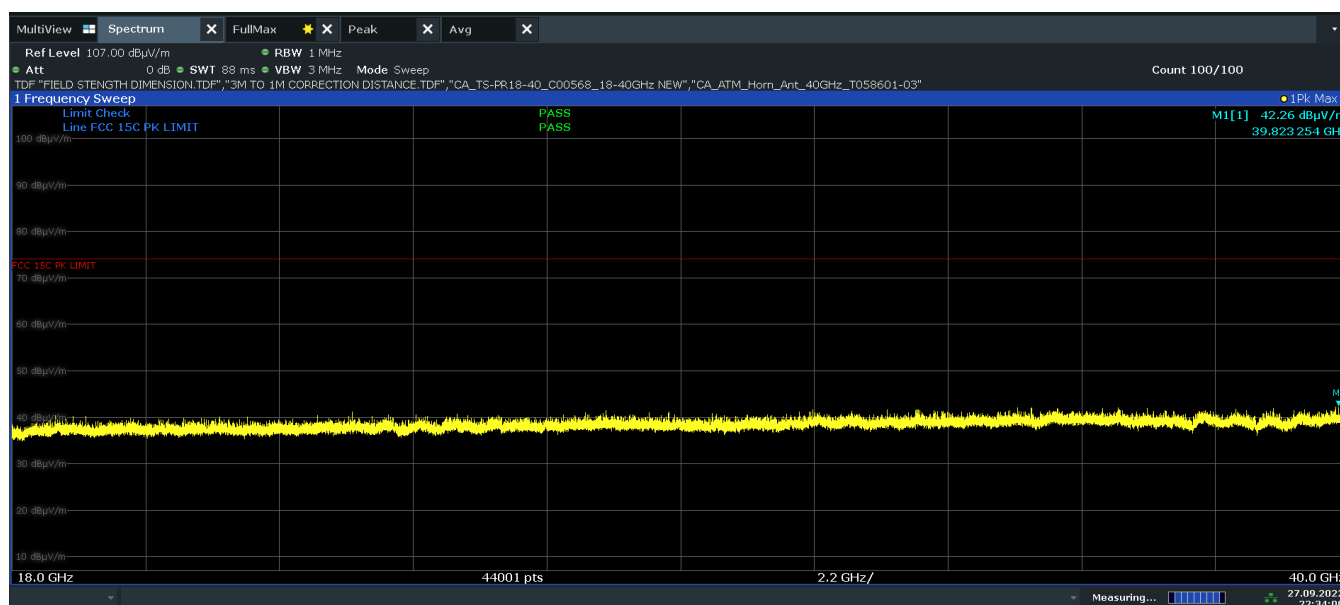

Plot 7-452. RSE 18GHz – 40 GHz CDD (11ax Ch.56 — RU52, Pol. H)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 205 of 278

V 10.5 12/15/2021

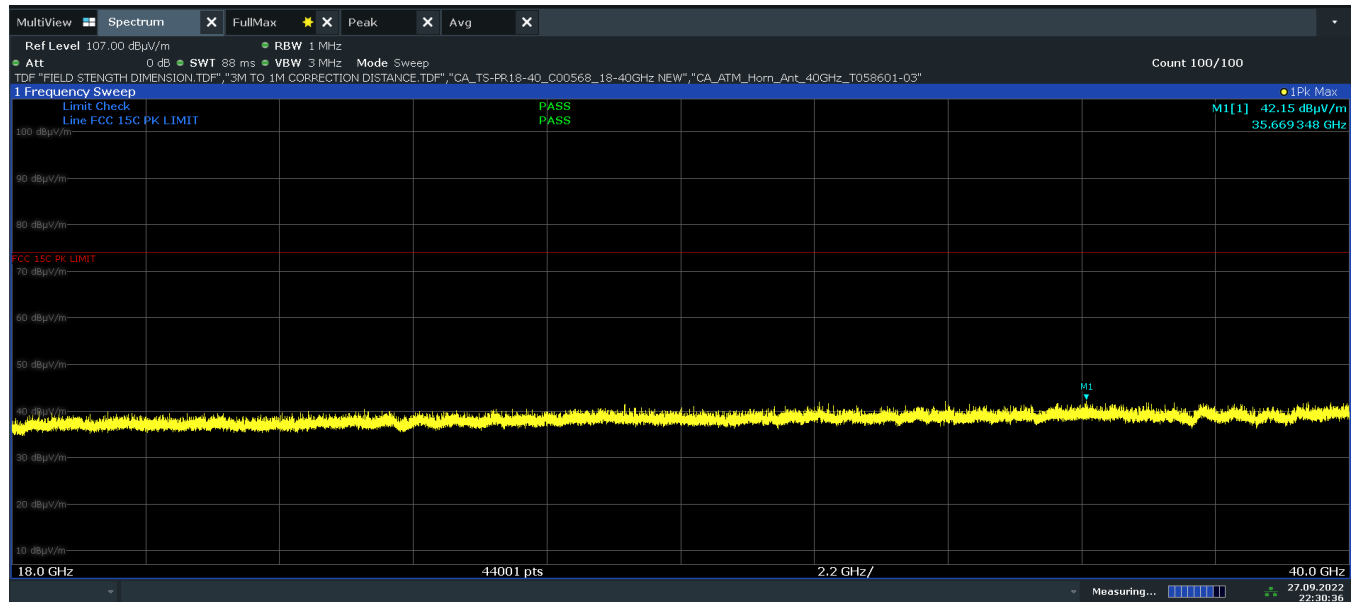


Plot 7-453. RSE 18 GHz - 40GHz CDD (11ax Ch.56 — RU52, Pol. V)

Mode: 802.11ax (20MHz BW)
 Data Rate: MCS11
 RU Index: 38
 Distance of Measurements: 3 Meters
 Operating Frequency: 5280MHz
 Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10560.00	Peak	H	-	-	-69.47	9.92	47.45	68.20	-20.75
* 15840.00	Average	H	-	-	-82.10	14.45	39.35	53.98	-14.63
* 15840.00	Peak	H	-	-	-70.56	14.45	50.89	73.98	-23.09

Table 7-171. Radiated Measurements CDD (RU52)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 206 of 278

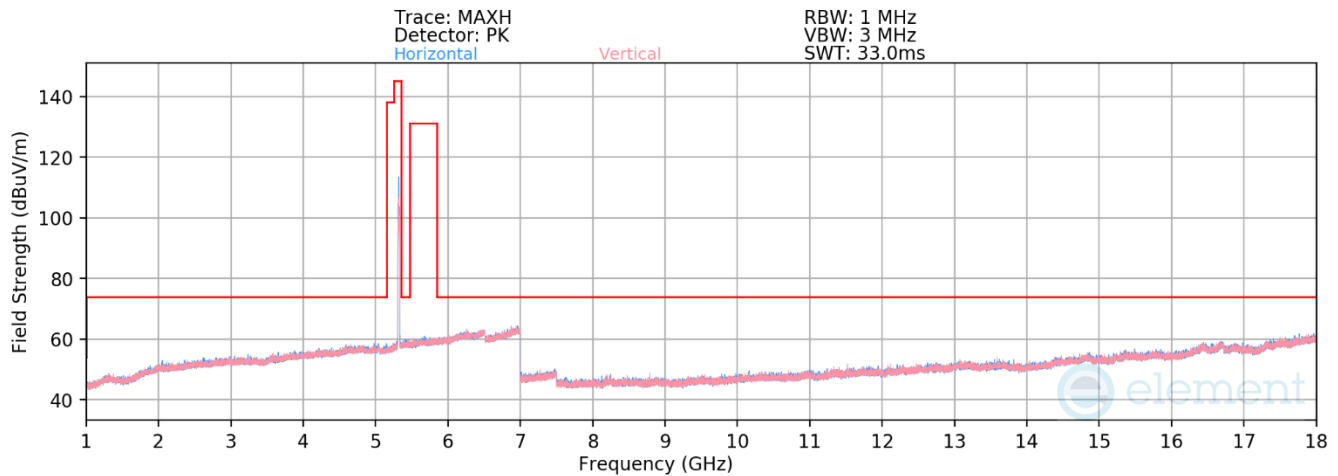

Plot 7-454. RSE above 1GHz CDD (11ax – Ch.64 – RU52)

Mode: 802.11ax (20MHz BW)
Data Rate: MCS11
RU Index: 38
Distance of Measurements: 3 Meters
Operating Frequency: 5320MHz
Channel: 64


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 10640.00	Average	H	-	-	-81.42	10.13	35.71	53.98	-18.27
* 10640.00	Peak	H	-	-	-69.89	10.13	47.24	73.98	-26.74
* 15960.00	Average	H	-	-	-82.17	14.94	39.77	53.98	-14.21
* 15960.00	Peak	H	-	-	-70.76	14.94	51.18	73.98	-22.80

Table 7-172. Radiated Measurements CDD (RU52)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 207 of 278

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

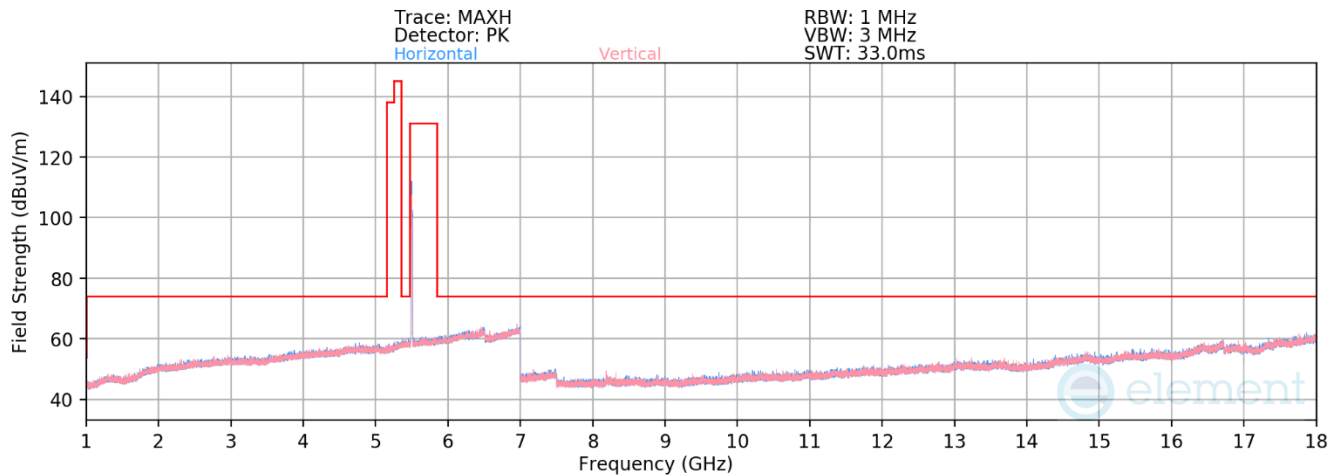

Plot 7-455. RSE above 1GHz CDD (11ax – Ch.100 – RU52)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS11
RU Index: 38
Distance of Measurements: 3 Meters
Operating Frequency: 5500MHz
Channel: 100

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11000.00	Average	H	-	-	-81.62	10.96	36.34	53.98	-17.64
*	11000.00	Peak	H	-	-	-70.38	10.96	47.58	73.98	-26.40
	16500.00	Peak	H	-	-	-72.66	17.98	52.32	68.20	-15.88


Table 7-173. Radiated Measurements CDD (RU52)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 208 of 278

V 10.5 12/15/2021

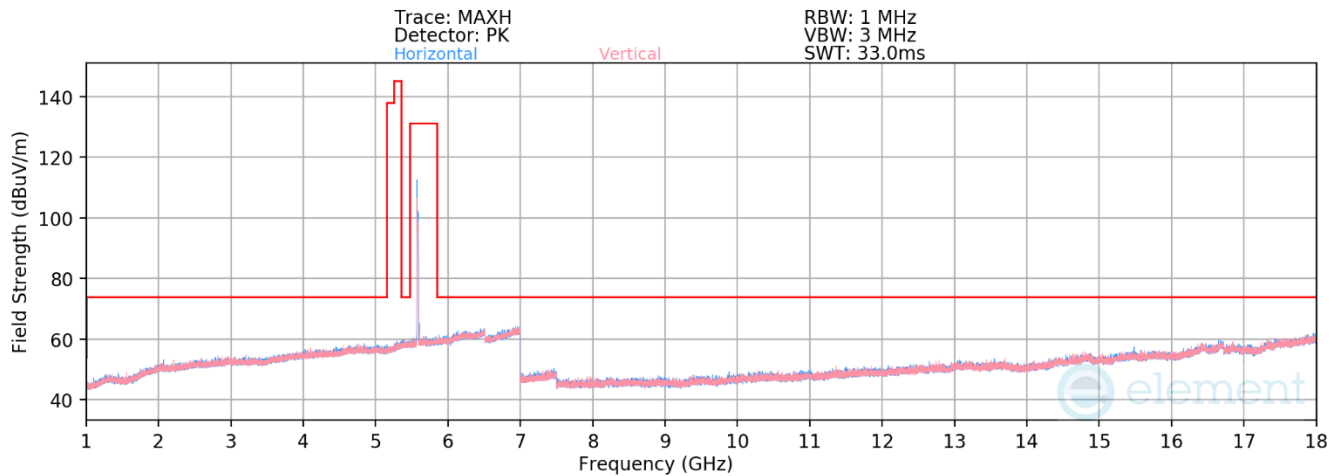


Plot 7-456. RSE above 1GHz CDD (11ax – Ch.116 – RU52)

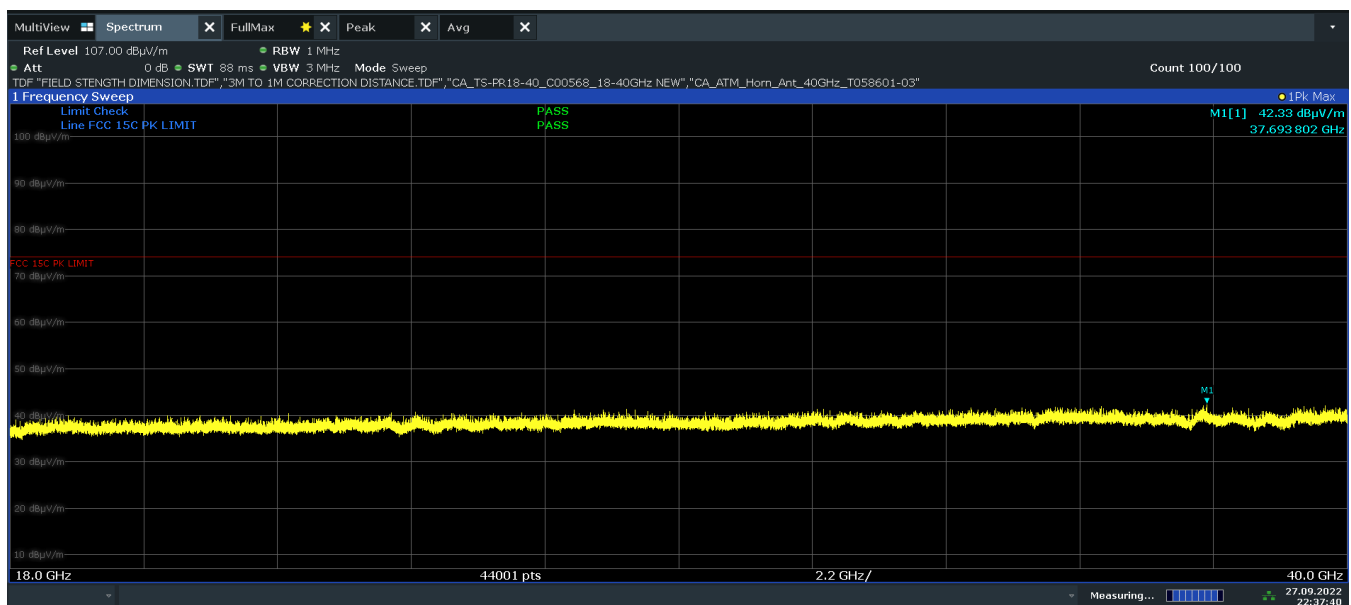

Plot 7-457. RSE 18GHz – 40 GHz CDD (11ax Ch.116 — RU52, Pol. H)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 209 of 278

V 10.5 12/15/2021

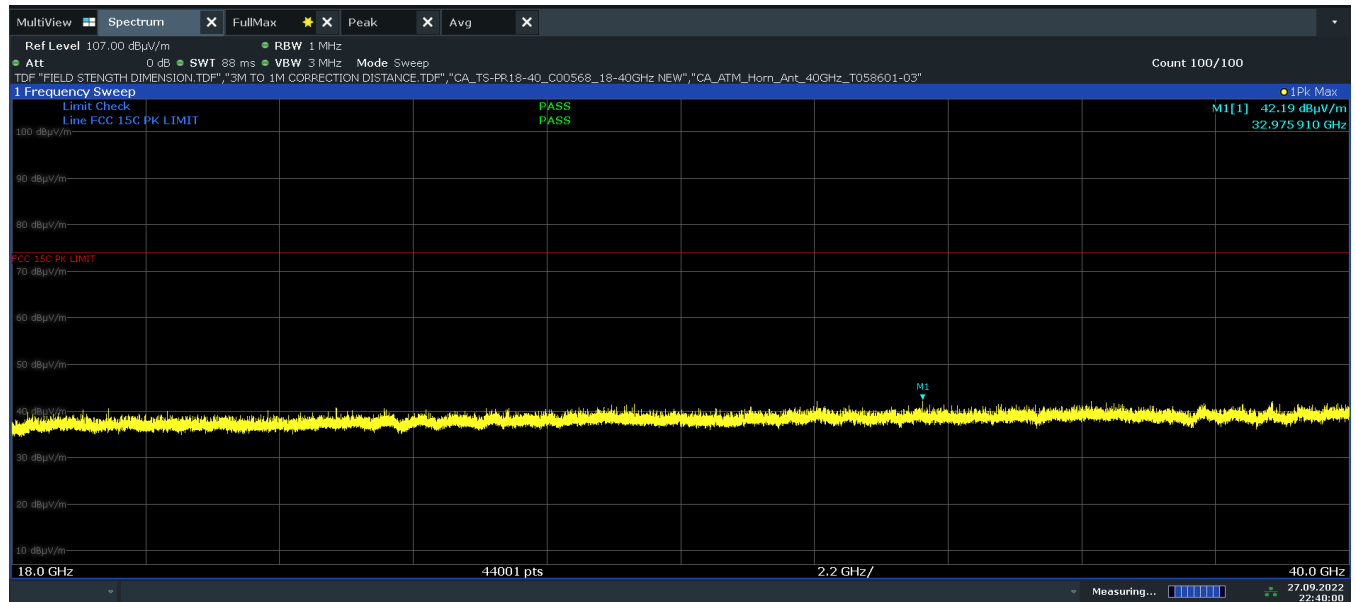


Plot 7-458. RSE 18 GHz - 40GHz CDD (11ax Ch.116 — RU52, Pol. V)

Mode: 802.11ax (20MHz BW)
 Data Rate: MCS11
 RU Index: 38
 Distance of Measurements: 3 Meters
 Operating Frequency: 5580MHz
 Channel: 116

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11160.00	Average	H	-	-	-81.25	10.39	36.14	53.98	-17.84
*	11160.00	Peak	H	-	-	-69.75	10.39	47.64	73.98	-26.34
	16740.00	Peak	H	-	-	-71.17	17.57	53.40	68.20	-14.80

Table 7-174. Radiated Measurements CDD (RU52)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 210 of 278

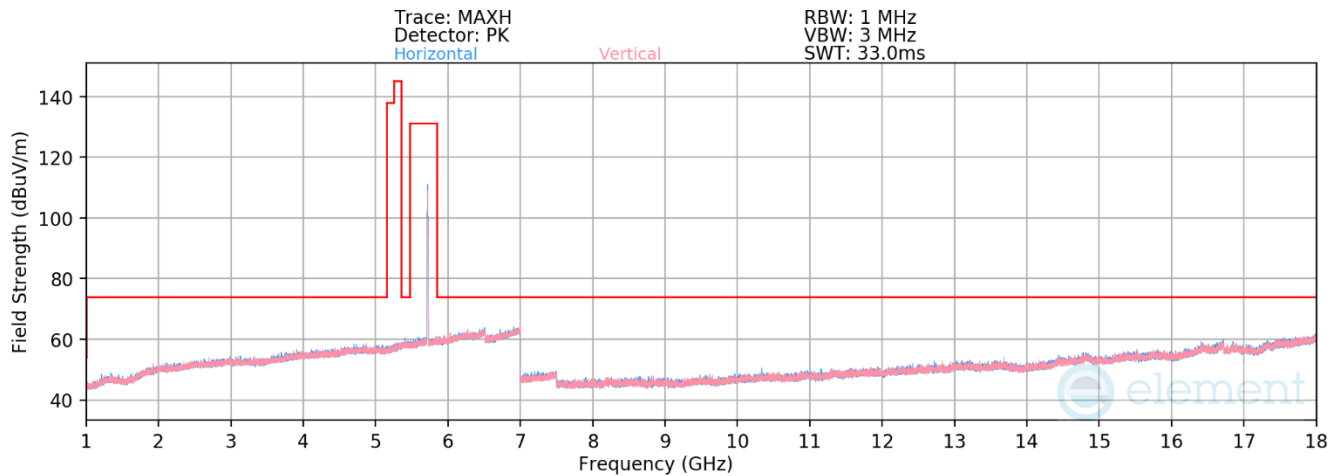

Plot 7-459. RSE above 1GHz CDD (11ax – Ch.144 – RU52)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS11
RU Index: 38
Distance of Measurements: 3 Meters
Operating Frequency: 5720MHz
Channel: 144

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11440.00	Average	H	-	-	-81.46	10.79	36.33	53.98	-17.65
*	11440.00	Peak	H	-	-	-69.59	10.79	48.20	73.98	-25.78
	17160.00	Peak	H	-	-	-72.50	18.62	53.12	68.20	-15.08

Table 7-175. Radiated Measurements CDD (RU52)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 211 of 278

V 10.5 12/15/2021

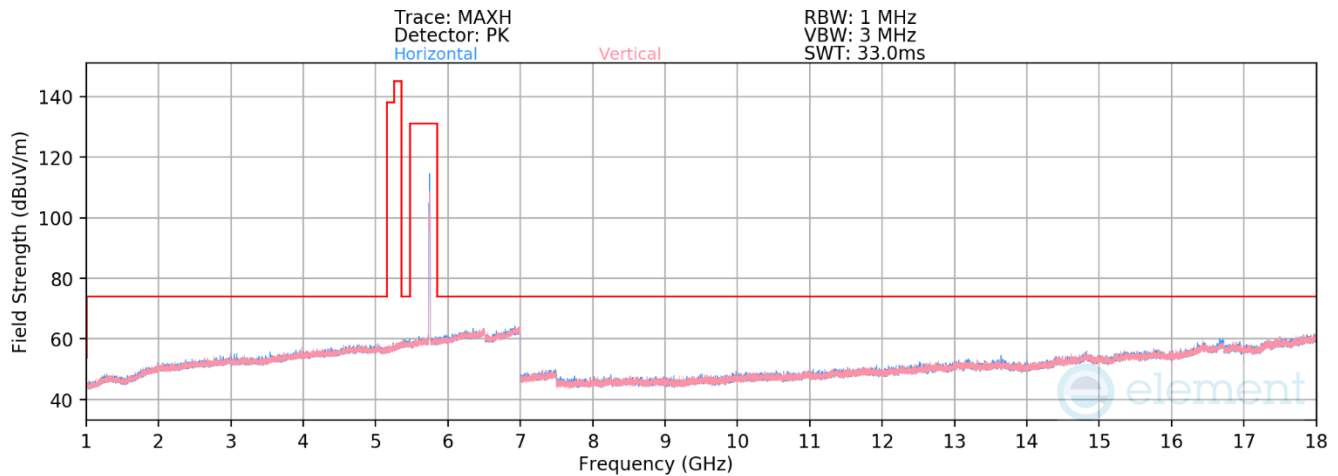

Plot 7-460. RSE above 1GHz CDD (11ax – Ch.149 – RU26)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS11
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5745MHz
Channel: 149

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11490.00	Average	H	-	-	-81.57	10.82	36.25	53.98	-17.73
*	11490.00	Peak	H	-	-	-70.75	10.82	47.07	73.98	-26.91
	17235.00	Peak	H	-	-	-72.40	18.44	53.04	68.20	-15.16


Table 7-176. Radiated Measurements CDD (RU26)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 212 of 278

V 10.5 12/15/2021

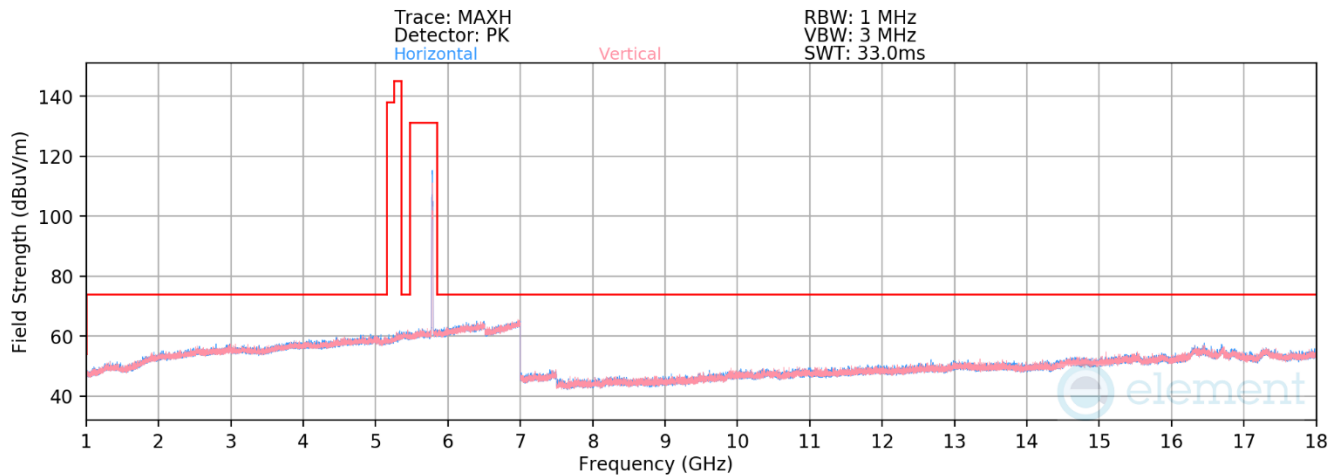


Plot 7-461. RSE above 1GHz CDD (11ax – Ch.157 – RU26)

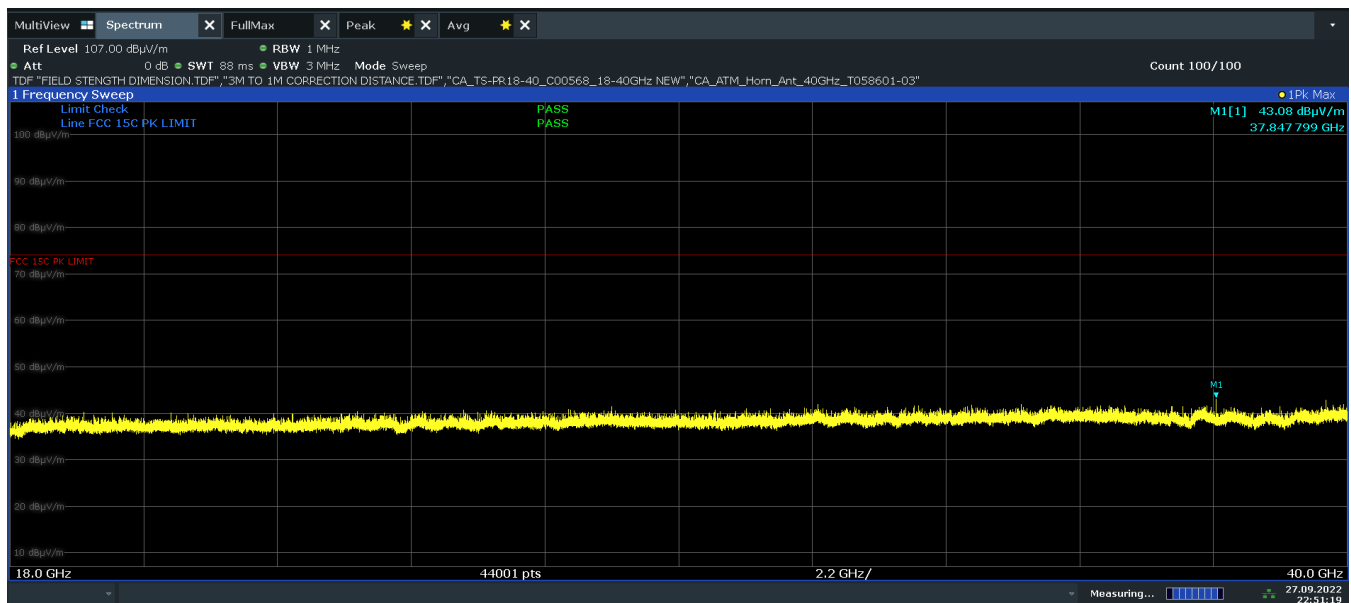

Plot 7-462. RSE 18GHz – 40 GHz CDD (11ax Ch.157 — RU26, Pol. H)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 213 of 278

V 10.5 12/15/2021

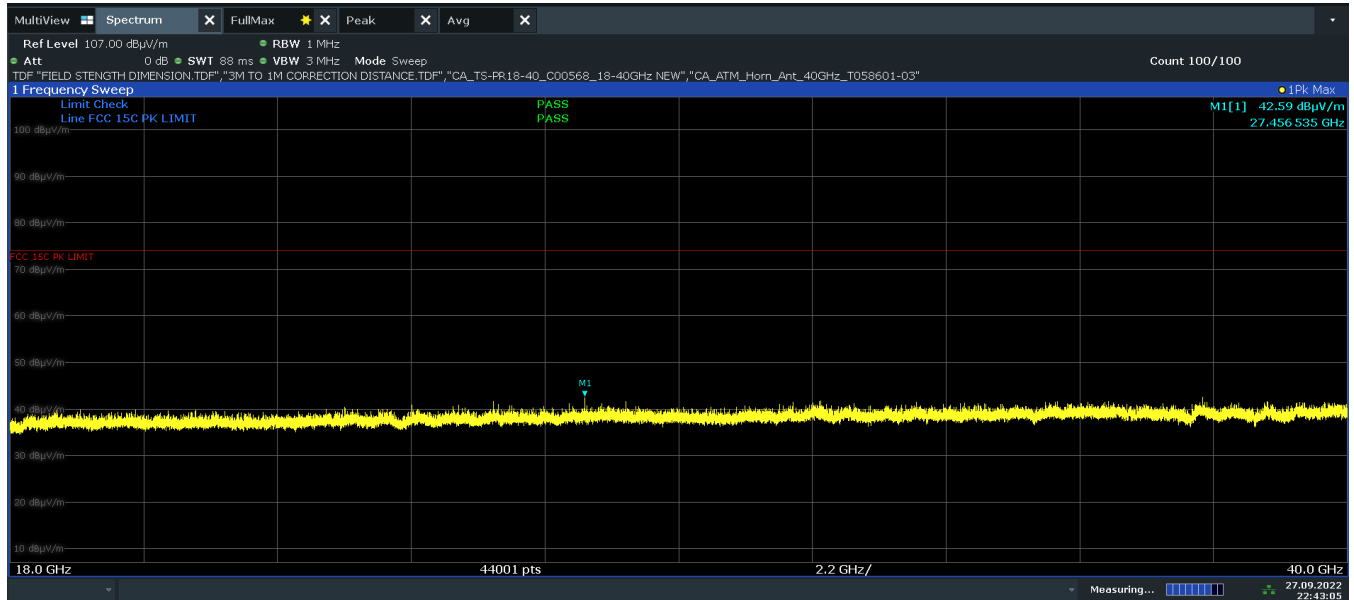


Plot 7-463. RSE 18 GHz - 40GHz CDD (11ax Ch.157 — RU26, Pol. V)

Mode: 802.11ax (20MHz BW)
 Data Rate: MCS11
 RU Index: 4
 Distance of Measurements: 3 Meters
 Operating Frequency: 5785MHz
 Channel: 157

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11570.00	Average	H	-	-	-81.74	10.97	36.23	53.98	-17.75
*	11570.00	Peak	H	-	-	-70.52	10.97	47.45	73.98	-26.53
	17355.00	Peak	H	-	-	-73.60	19.31	52.71	68.20	-15.49

Table 7-177. Radiated Measurements CDD (RU26)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 214 of 278

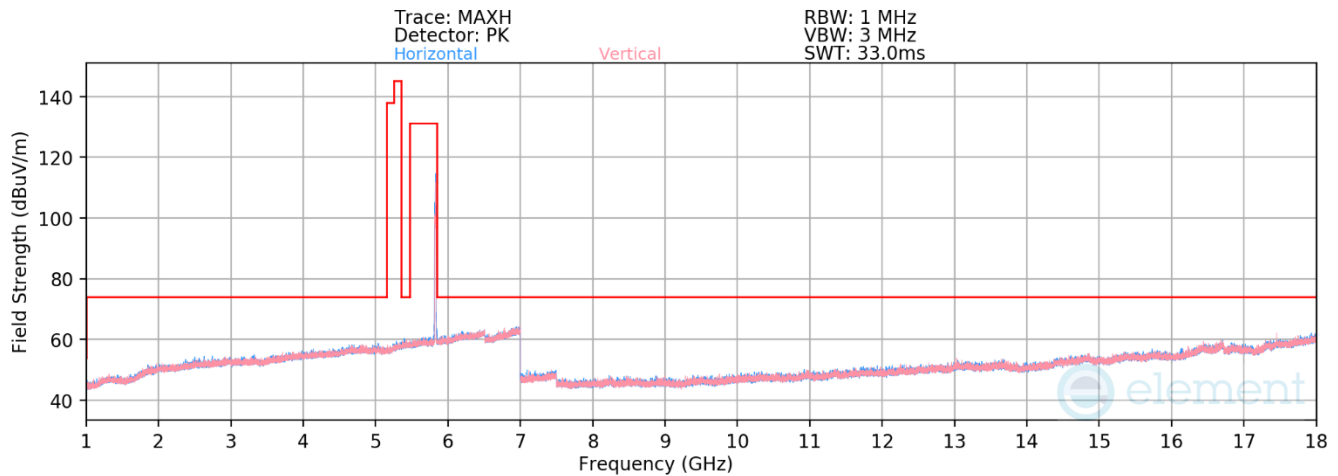

Plot 7-464. RSE above 1GHz CDD (11ax – Ch.165 – RU26)

Mode: 802.11ax (20MHz BW)
Data Rate: MCS11
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5825MHz
Channel: 165


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11650.00	Average	H	-	-	-81.65	11.13	36.48	53.98	-17.50
* 11650.00	Peak	H	-	-	-69.95	11.13	48.18	73.98	-25.80
17475.00	Peak	H	-	-	-74.19	21.67	54.48	68.20	-13.72

Table 7-178. Radiated Measurements CDD (RU26)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 215 of 278

V 10.5 12/15/2021

RU242

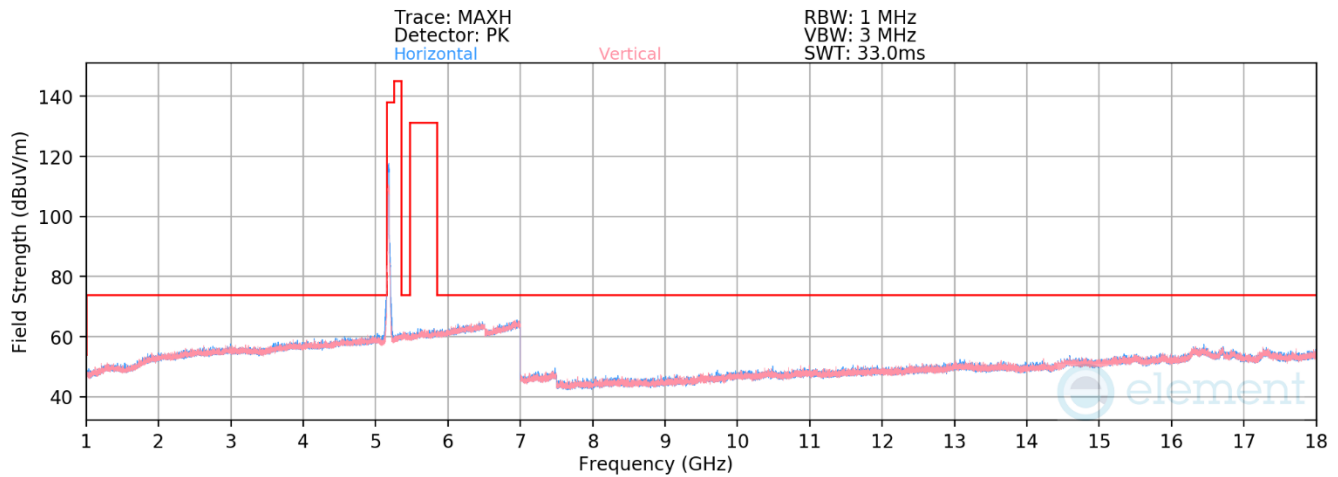

Plot 7-465. RSE above 1GHz CDD (11ax – Ch.36 – RU242)


Mode:	802.11ax (20MHz BW)
Data Rate:	MCS11
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	5180MHz
Channel:	36

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10360.00	Peak	H	-	-	-70.19	10.05	46.86	68.20	-21.34
* 15540.00	Average	H	-	-	-82.92	15.23	39.31	53.98	-14.67
* 15540.00	Peak	H	-	-	-71.71	15.23	50.52	73.98	-23.46


Table 7-179. Radiated Measurements CDD (RU242)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 216 of 278

V 10.5 12/15/2021

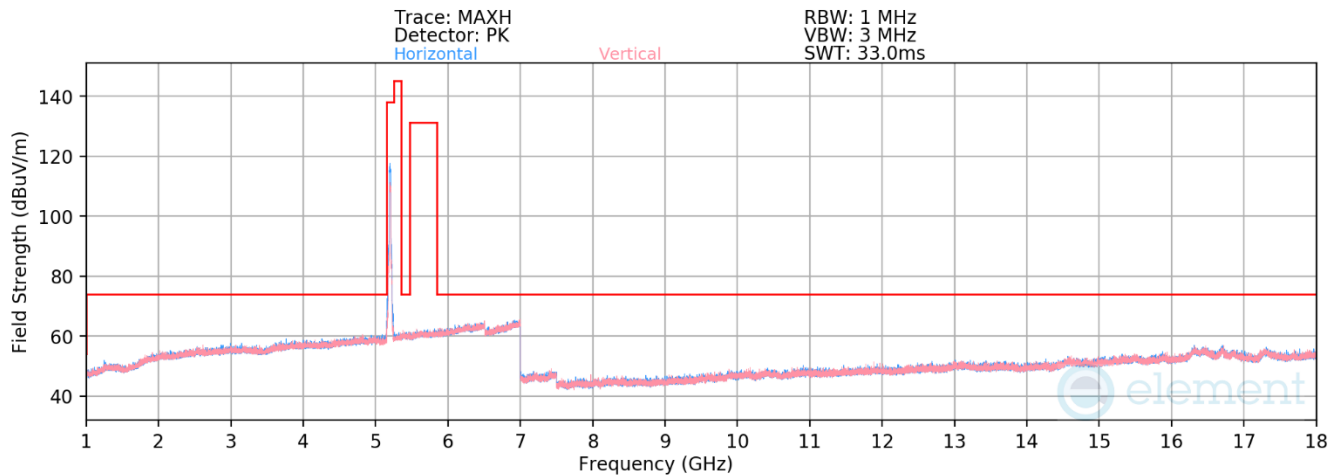

Plot 7-466. RSE above 1GHz CDD (11ax – Ch.40 – RU242)

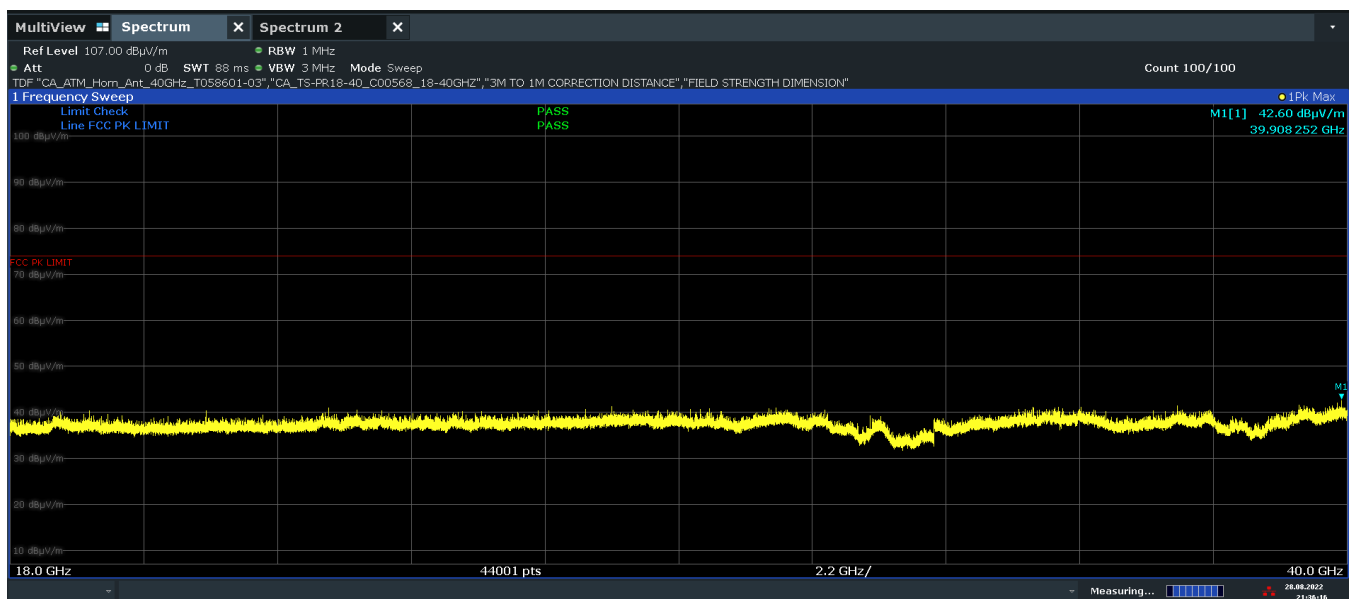


Plot 7-467. RSE 18GHz – 40 GHz CDD (11ax Ch.40 — RU242, Pol. H)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 217 of 278

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

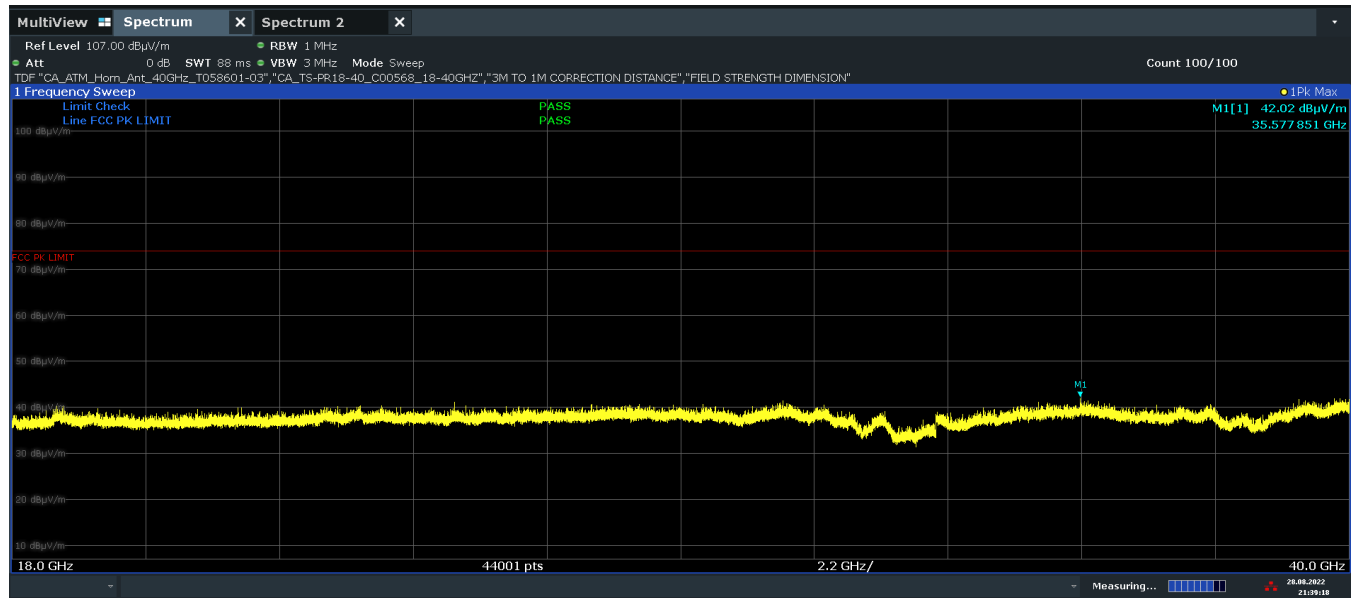

21:39:10 20.08.2022

Plot 7-468. RSE 18 GHz - 40GHz CDD (11ax Ch.40 — RU242, Pol. V)

Mode:	802.11ax (20MHz BW)
Data Rate:	MCS11
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	5200MHz
Channel:	40


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10400.00	Peak	H	-	-	-69.11	9.87	47.76	68.20	-20.44
* 15600.00	Average	H	-	-	-82.56	14.80	39.24	53.98	-14.74
* 15600.00	Peak	H	-	-	-70.47	14.80	51.33	73.98	-22.65

Table 7-180. Radiated Measurements CDD (RU242)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 218 of 278

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

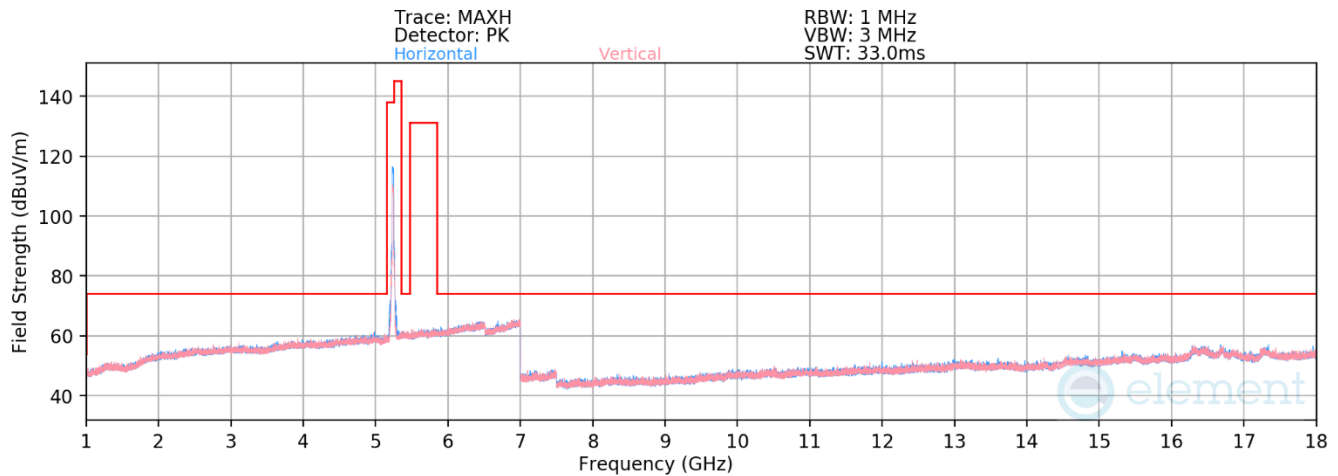

Plot 7-469. RSE above 1GHz CDD (11ax – Ch.48 – RU242)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS11
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5240MHz
Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10480.00	Peak	H	-	-	-69.89	10.13	47.24	68.20	-20.96
* 15720.00	Average	H	-	-	-82.42	14.34	38.92	53.98	-15.06
* 15720.00	Peak	H	-	-	-70.90	14.34	50.44	73.98	-23.54

Table 7-181. Radiated Measurements CDD (RU242)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 219 of 278

V 10.5 12/15/2021

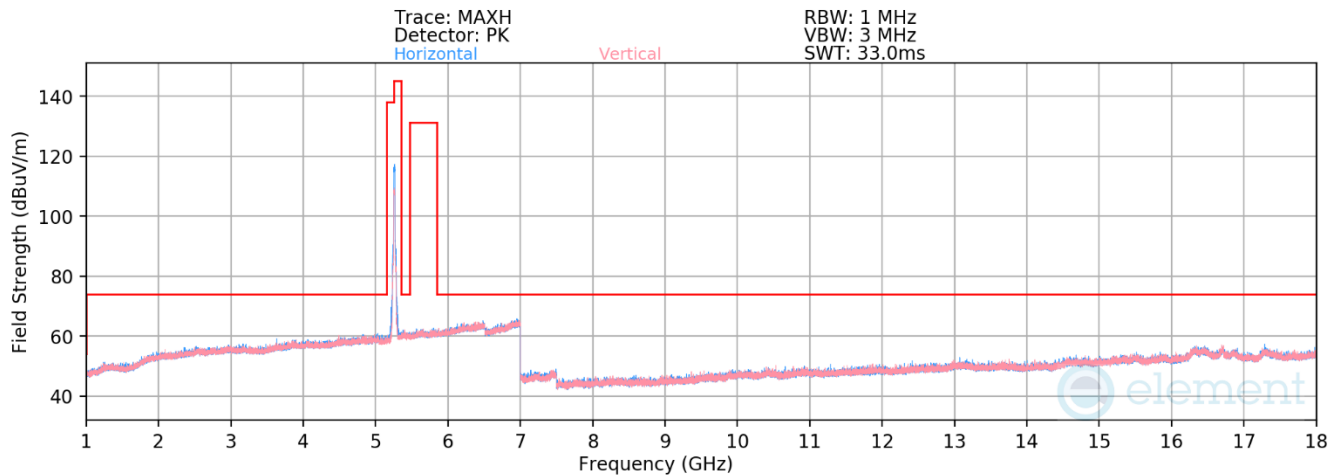

Plot 7-470. RSE above 1GHz CDD (11ax – Ch.52 – RU242)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS11
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5260MHz
Channel: 52

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10520.00	Peak	H	-	-	-70.11	10.37	47.26	68.20	-20.94
* 15780.00	Average	H	-	-	-82.45	14.19	38.74	53.98	-15.24
* 15780.00	Peak	H	-	-	-71.14	14.19	50.05	73.98	-23.93


Table 7-182. Radiated Measurements CDD (RU242)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 220 of 278

V 10.5 12/15/2021

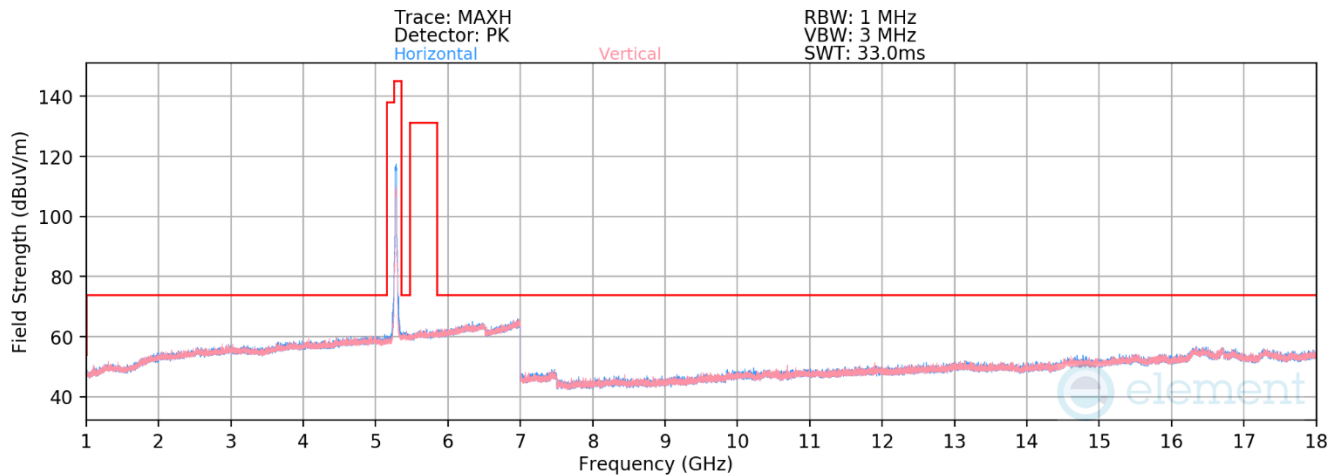

Plot 7-471. RSE above 1GHz CDD (11ax – Ch.56 – RU242)

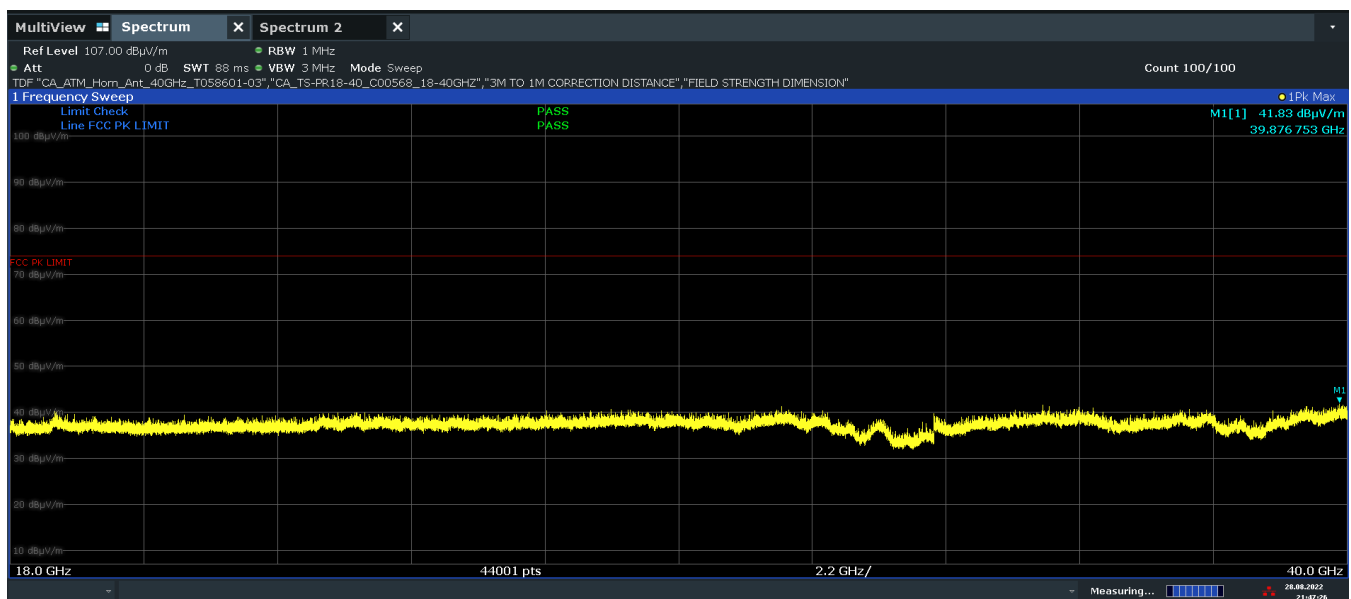


Plot 7-472. RSE 18GHz – 40 GHz CDD (11ax Ch.56 — RU242, Pol. H)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 221 of 278

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

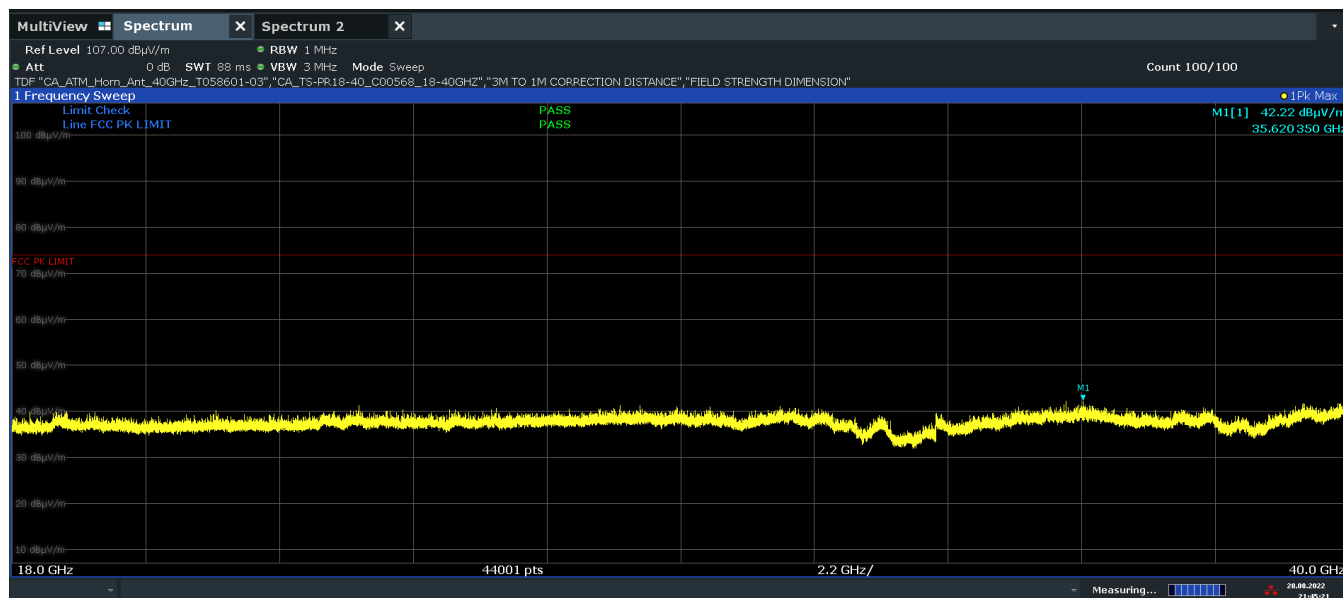

21:45:22 20.08.2022

Plot 7-473. RSE 18 GHz - 40GHz CDD (11ax Ch.56 — RU242, Pol. V)

Mode: 802.11ax (20MHz BW)
 Data Rate: MCS11
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 5280MHz
 Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10560.00	Peak	H	-	-	-69.82	9.92	47.10	68.20	-21.10
* 15840.00	Average	H	-	-	-81.95	14.45	39.50	53.98	-14.48
* 15840.00	Peak	H	-	-	-70.80	14.45	50.65	73.98	-23.33

Table 7-183. Radiated Measurements CDD (RU242)

FCC ID: BCG2764 IC: 579C-A2764		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090028-20.BCG	Test Dates: 05/30/2022-9/29/2022	EUT Type: Tablet Device	Page 222 of 278

V 10.5 12/15/2021