

FCC and ISED Test Report

Apple Inc
Model: A2779

In accordance with FCC 47 CFR Part 15C, ISED
RSS-247 and ISED RSS-GEN
(2.4 GHz Bluetooth)

Prepared for: Apple Inc
One Apple Park Way
Cupertino, California
95014, USA

FCC ID: BCGA2779

IC: 579C-A2779

COMMERCIAL-IN-CONFIDENCE

Document 75955428-03 Issue 01



Add value.
Inspire trust.

TUV
SUD
Limited

Digitally signed by TUV SUD
Limited
Date: 2022.11.11 13:37:55 Z

SIGNATURE

NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
S Bennett	Head Of New Service Development	Authorised Signatory	11 November 2022

Signatures in this approval box have checked this document in line with the requirements of TUV SUD document control rules.

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15C, ISED RSS-247 and ISED RSS-GEN. The sample tested was found to comply with the requirements defined in the applied rules.

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Report Generation	Hollie Marshall	11 November 2022	

FCC Accreditation

90987 Octagon House, Fareham Test Laboratory

ISED Accreditation

12669A Octagon House, Fareham Test Laboratory

EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with FCC 47 CFR Part 15C: 2020, ISED RSS-247: Issue 2 (02-2017) and ISED RSS-GEN: Issue 5 (04-2018) + A2 (02-2021) for the tests detailed in section 1.3.



DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD. No part of this document may be reproduced without the prior written approval of TÜV SÜD. © 2022 TÜV SÜD. This report relates only to the actual item/items tested.

ACCREDITATION

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation. Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited).

TÜV SÜD
is a trading name of TÜV SÜD Ltd
Registered in Scotland at East Kilbride,
Glasgow G75 0QF, United Kingdom
Registered number: SC215164

TÜV SÜD Ltd is a
TÜV SÜD Group Company

Phone: +44 (0) 1489 558100
Fax: +44 (0) 1489 558101
www.tuvsud.com/en

TÜV SÜD
Octagon House
Concorde Way
Fareham
Hampshire PO15 5RL
United Kingdom

TÜV SÜD





Contents

1 Report Summary2

1.1 Report Modification Record.....2

1.2 Introduction.....2

1.3 Brief Summary of Results3

1.4 Product Information4

1.5 Deviations from the Standard.....4

1.6 EUT Modification Record5

1.7 Test Location6

2 Test Details7

2.1 Restricted Band Edges.....7

2.2 Frequency Hopping Systems - Average Time of Occupancy 28

2.3 Frequency Hopping Systems - Channel Separation 40

2.4 Frequency Hopping Systems - Number of Hopping Channels 55

2.5 Frequency Hopping Systems - 20 dB Bandwidth 62

2.6 Maximum Conducted Output Power 108

2.7 Spurious Radiated Emissions 123

2.8 Authorised Band Edges 139

3 Measurement Uncertainty 159



1 Report Summary

1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
1	First Issue	11-November-2022

Table 1

1.2 Introduction

Applicant	Apple Inc
Manufacturer	Apple Inc
Model Number(s)	A2779
Serial Number(s)	JM67M9K770 and NX7LCFL417
Hardware Version(s)	REV 1.0
Software Version(s)	22A31991j
Number of Samples Tested	2
Test Specification/Issue/Date	FCC 47 CFR Part 15C: 2020 ISED RSS-247: Issue 2 (02-2017) ISED RSS-GEN: Issue 5 (04-2018) + A2 (02-2021)
Order Number	0540246998
Start of Test	10-August-2022
Finish of Test	14-October-2022
Name of Engineer(s)	Mohammad Malik, Colin Brain, Thomas Biddlecombe, Elliot Callender, James Woods, Ioan-Alexandru Bogatu and Taha Shafique
Related Document(s)	KDB 662911 D01 v02r01 ANSI C63.10 (2013) ANSI C63.10 (2020)



1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15C, ISSED RSS-247 and ISSED RSS-GEN is shown below.

Section	Specification Clause			Test Description	Result	Comments/Base Standard
	FCC Part 15C	RSS-247	RSS-GEN			
Configuration and Mode: 2.4 GHz Bluetooth - FHSS						
-	15.203	-	-	Antenna Requirement	N/T	The device complies with the provisions of this section, as it uses permanently attached integral antennas.
2.1	15.205	3.1	8.10	Restricted Band Edges	Pass	
2.2	15.247 (a)(1)	5.1	-	Frequency Hopping Systems - Average Time of Occupancy	Pass	
2.3	15.247 (a)(1)	5.1	-	Frequency Hopping Systems - Channel Separation	Pass	
2.4	15.247 (a)(1)	5.1	-	Frequency Hopping Systems - Number of Hopping Channels	Pass	
2.5	15.247 (a)(1)	5.1	6.7	Frequency Hopping Systems - 20 dB Bandwidth	Pass	
2.6	15.247 (b)	5.4	6.12	Maximum Conducted Output Power	Pass	
2.7	15.209 and 15.247 (d)	3.3 and 5.5	6.13 and 8.9	Spurious Radiated Emissions	Pass	
2.8	15.247 (d)	5.5	-	Authorised Band Edges	Pass	

Table 2



1.4 Product Information

1.4.1 Technical Description

The equipment under test was an Apple laptop computer with Bluetooth® and IEEE 802.11 a/b/g/n/ac/ax Wi-Fi capabilities in the 2.4GHz, 5GHz and 6GHz bands.

1.4.2 Test Setup

For conducted tests, a conducted test point was provided by the manufacturer via a UFL connector and cable. The loss of these test cables were known and compensated for in any conducted measurements.

For tests in SISO operation, conducted tests were performed on the BT Dedicated Core (BT Core 2) as well as the Core from the main radio with the highest antenna gain as Core 0 and Core 1 are identical but with unequal antenna gains.

Bluetooth BDR/EDR was assessed as a FHSS system. The EUT supports Bluetooth on the following mode of operations across its antenna ports:

BT Core 0 (SISO) – iPA BDR/EDR and ePA EDR
BT Core 1 (SISO) – iPA BDR/EDR and ePA EDR
BT Core 0 + BT Core 1 (TxBF) – iPA BDR/EDR and ePA EDR
BT Core 2 (SISO) – iPA BDR/EDR

For all tests, the EUT was put into a continuous transmit test mode with the manufacturer's test commands via a script running in the EUTs terminal application. The EUT then transmitted the required type of modulation/packet type on either a static channel selected within the test script or frequency hopping over the maximum number of supported channels.

All testing was performed with the EUT powered via a 120 V AC, 60 Hz source.

1.4.3 Antenna Gain Table

Antenna Port	Frequency Range (MHz)	Peak Gain (dBi)	Conducted Cable Loss (dB)
BT Core 0	2400 to 2480	4.78	0.7
BT Core 1	2400 to 2480	4.93	0.7
BT Core 2	2400 to 2480	5.25	0.7

Table 3

1.5 Deviations from the Standard

No deviations from the applicable test standard were made during testing.



1.6 EUT Modification Record

The table below details modifications made to the EUT during the test programme.

The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
Model: A2779, Serial Number: NX7LCFL417			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A2779, Serial Number: JM67M9K770			
0	As supplied by the customer	Not Applicable	Not Applicable

Table 4



1.7 Test Location

TÜV SÜD conducted the following tests at our Octagon House Test Laboratory.

Test Name	Name of Engineer(s)	Accreditation
Configuration and Mode: 2.4 GHz Bluetooth - FHSS		
Frequency Hopping Systems - Average Time of Occupancy	Thomas Biddlecombe	UKAS
Frequency Hopping Systems - Channel Separation	Thomas Biddlecombe	UKAS
Frequency Hopping Systems - Number of Hopping Channels	Thomas Biddlecombe	UKAS
Frequency Hopping Systems - 20 dB Bandwidth	Thomas Biddlecombe	UKAS
Maximum Conducted Output Power	Thomas Biddlecombe	UKAS

Table 5

Office Address:

TÜV SÜD
Octagon House
Concorde Way
Fareham
Hampshire
PO15 5RL
United Kingdom

TÜV SÜD conducted the following tests at our Concorde Park Test Laboratory.

Test Name	Name of Engineer(s)	Accreditation
Configuration and Mode: 2.4 GHz Bluetooth - FHSS		
Restricted Band Edges	Mohammad Malik and Colin Brain	UKAS
Spurious Radiated Emissions	Elliot Callender, Mohammad Malik, James Woods, Ioan-Alexandru Bogatu and Taha Shafique	UKAS
Authorised Band Edges	Mohammad Malik and Colin Brain	UKAS

Table 6

Office Address:

TÜV SÜD
Concorde Park
Concorde Way
Fareham
Hampshire
PO15 5FG
United Kingdom



2 Test Details

2.1 Restricted Band Edges

2.1.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.205
ISED RSS-247, Clause 3.1
ISED RSS-GEN, Clause 8.10

2.1.2 Equipment Under Test and Modification State

A2779, S/N: JM67M9K770 - Modification State 0

2.1.3 Date of Test

10-August-2022 to 11-August-2022

2.1.4 Test Method

This test was performed in accordance with ANSI C63.10, clause 6.10.5.

Plots for average measurements were taken in accordance with ANSI C63.10, clause 4.1.4.2.5. These are shown for information purposes and were used to determine the worst-case measurement point. Final average measurements were then taken in accordance with ANSI C63.10, clause 4.1.4.2.2 to obtain the measurement result recorded in the test results tables.

The following conversion can be applied to convert from dB μ V/m to μ V/m:

$10^{(\text{Field Strength in dB}\mu\text{V/m}/20)}$.

2.1.5 Environmental Conditions

Ambient Temperature	21.9 - 22.5 °C
Relative Humidity	44.8 - 47.7 %

2.1.6 Test Results

2.4 GHz Bluetooth (FHSS)

iPA

Mode	Modulation	Core	Packet Type	Tx Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
Static	GFSK	1	DH5	2402	2390.0	55.04	40.69
Static	$\pi/4$ DQPSK	1	2-DH5	2402	2390.0	55.01	40.38
Static	8-DPSK	1	3-DH5	2402	2390.0	55.61	40.36
Static	GFSK	1	DH5	2480	2483.5	54.56	42.27
Static	$\pi/4$ DQPSK	1	2-DH5	2480	2483.5	53.93	41.75
Static	8-DPSK	1	3-DH5	2480	2483.5	54.56	41.72

Table 7 - Restricted Band Edge Results

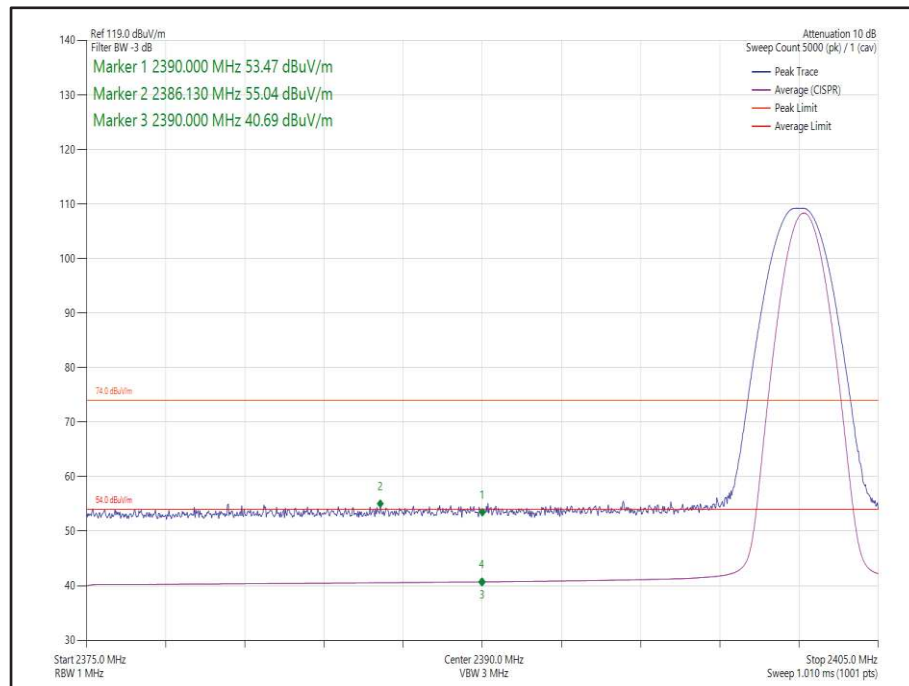


Figure 1 - Static - GFSK/DH5 - 2402 MHz - Band Edge Frequency 2390.0 MHz

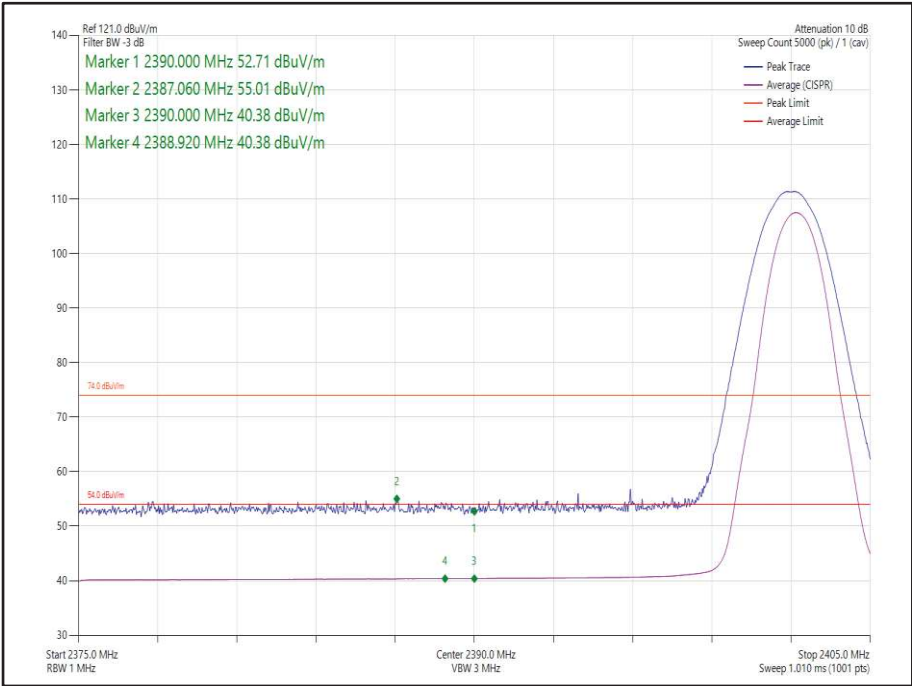


Figure 2 - Static - $\pi/4$ DQPSK/2-DH5 - 2402 MHz - Band Edge Frequency 2390.0 MHz

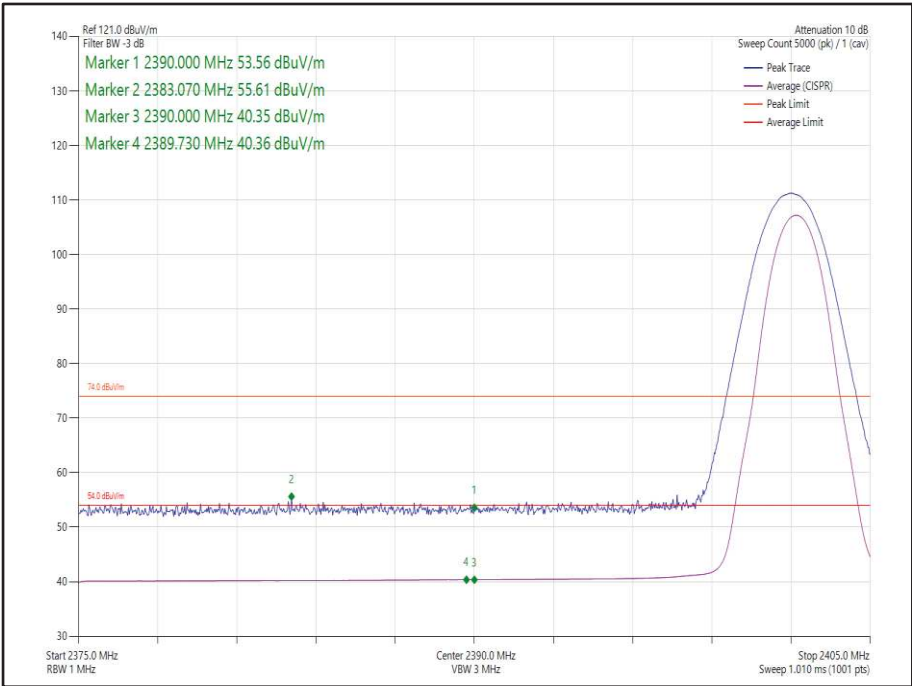


Figure 3 - Static - 8-DPSK/3-DH5 - 2402 MHz Band Edge Frequency 2390.0 MHz

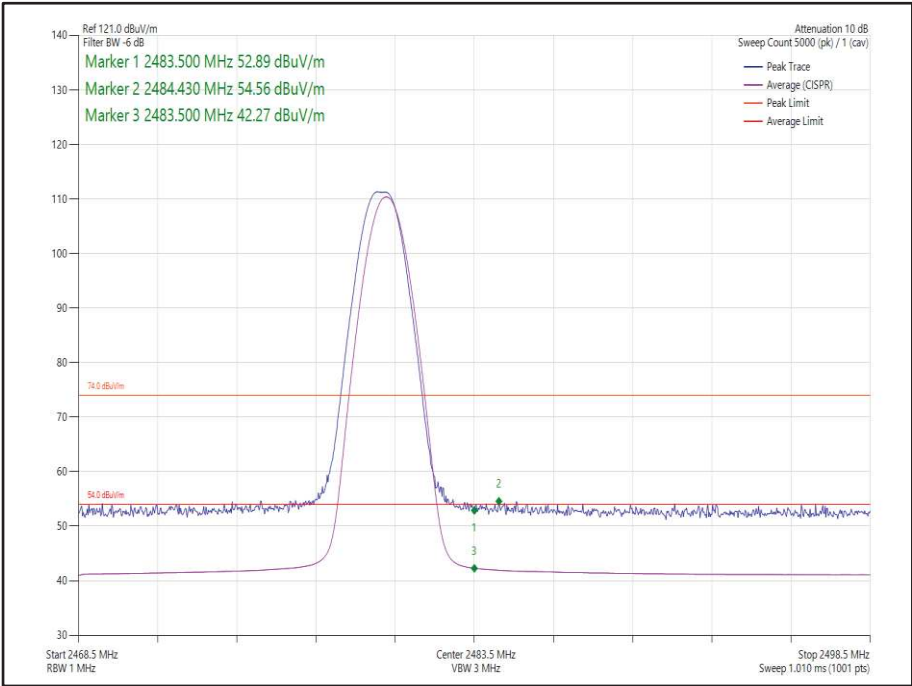


Figure 4 - Static - GFSK/DH5 - 2480 MHz - Band Edge Frequency 2483.5 MHz

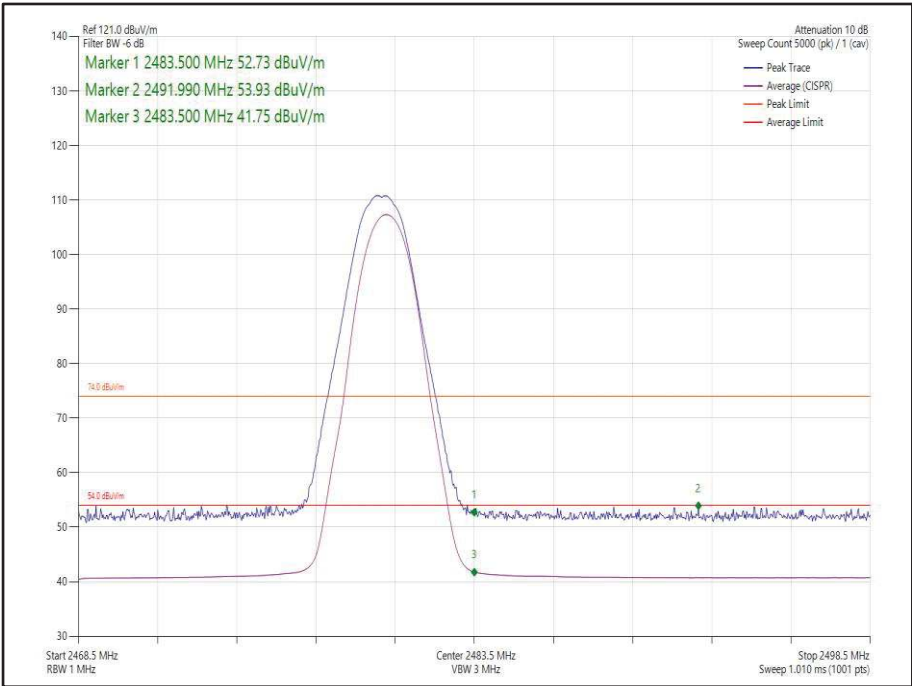


Figure 5 - Static - $\pi/4$ DQPSK/2-DH5 - 2480 MHz - Band Edge Frequency 2483.5 MHz

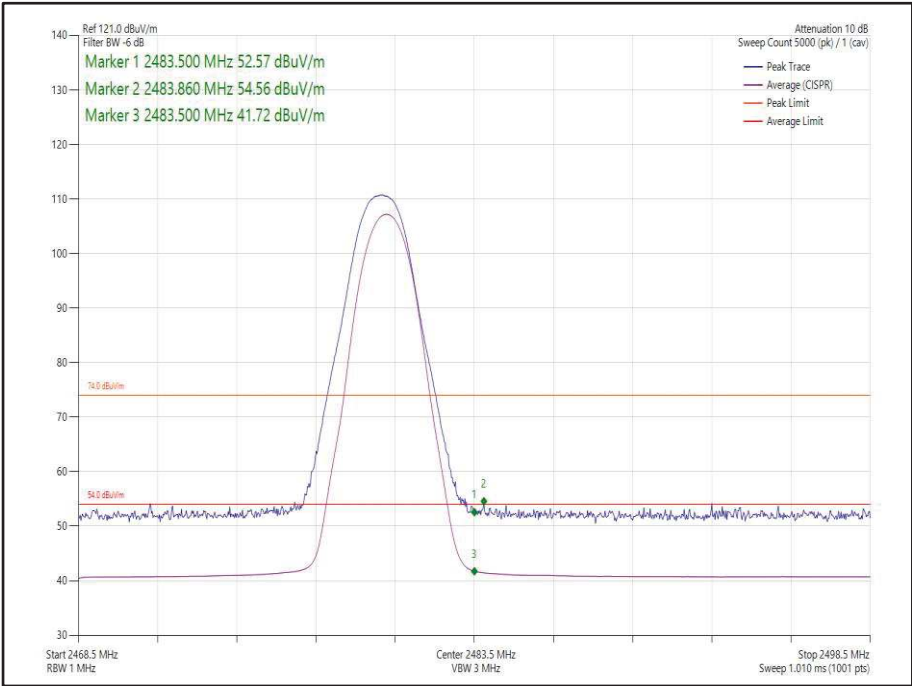


Figure 6 - Static - 8-DPSK/3-DH5 - 2480 MHz - Band Edge Frequency 2483.5 MHz



2.4 GHz Bluetooth (FHSS)

ePA

Mode	Modulation	Core	Packet Type	Tx Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
Static	π/4 DQPSK	1	2-DH5	2402	2390.0	55.95	41.42
Static	8-DPSK	1	3-DH5	2402	2390.0	55.97	41.59
Static	π/4 DQPSK	1	2-DH5	2480	2483.5	58.00	44.58
Static	8-DPSK	1	3-DH5	2480	2483.5	58.06	45.48

Table 8 - Restricted Band Edge Results

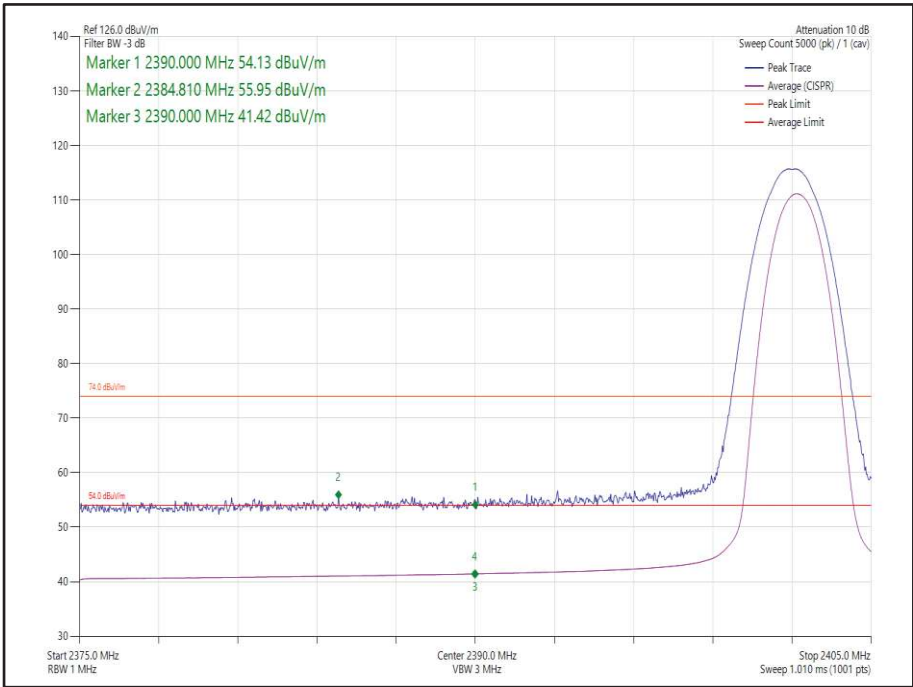


Figure 7 - Static - π/4 DQPSK/2-DH5 - 2402 MHz - Band Edge Frequency 2390.0 MHz

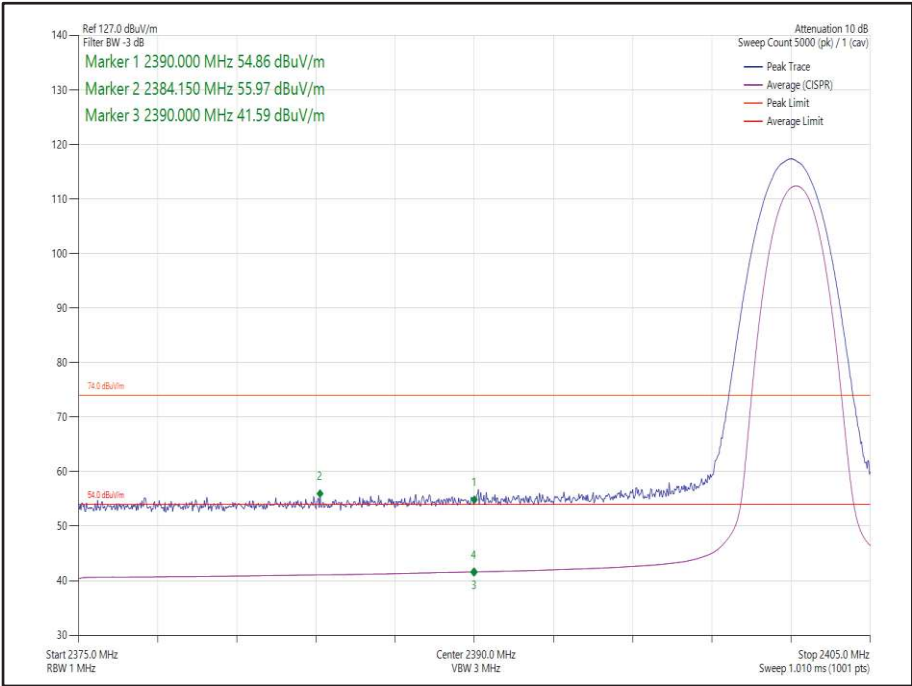


Figure 8 - Static - 8-DPSK/3-DH5 - 2402 MHz Band Edge Frequency 2390.0 MHz

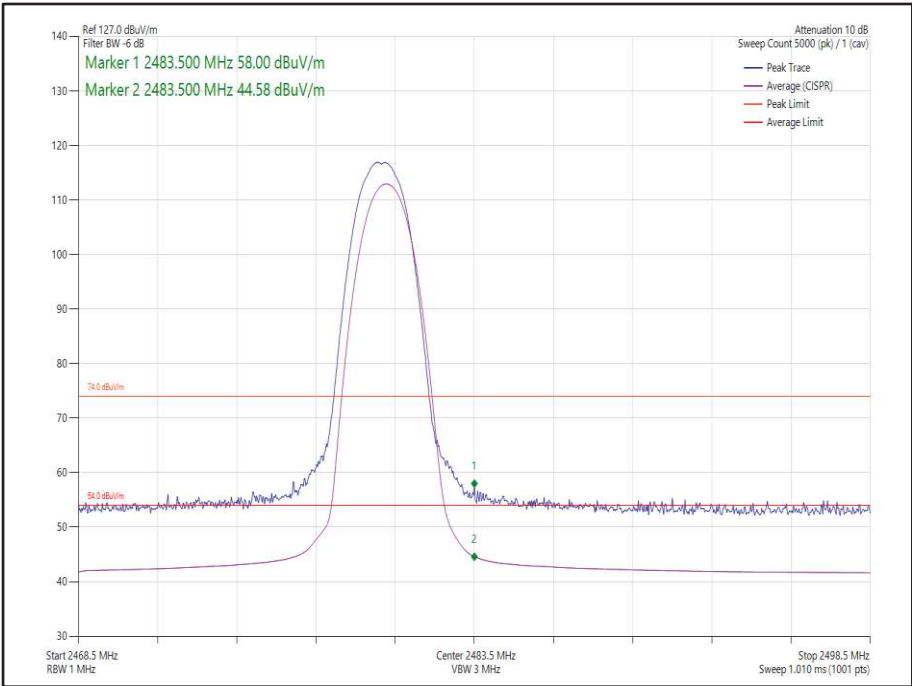


Figure 9 - Static - $\pi/4$ DQPSK/2-DH5 - 2480 MHz - Band Edge Frequency 2483.5 MHz

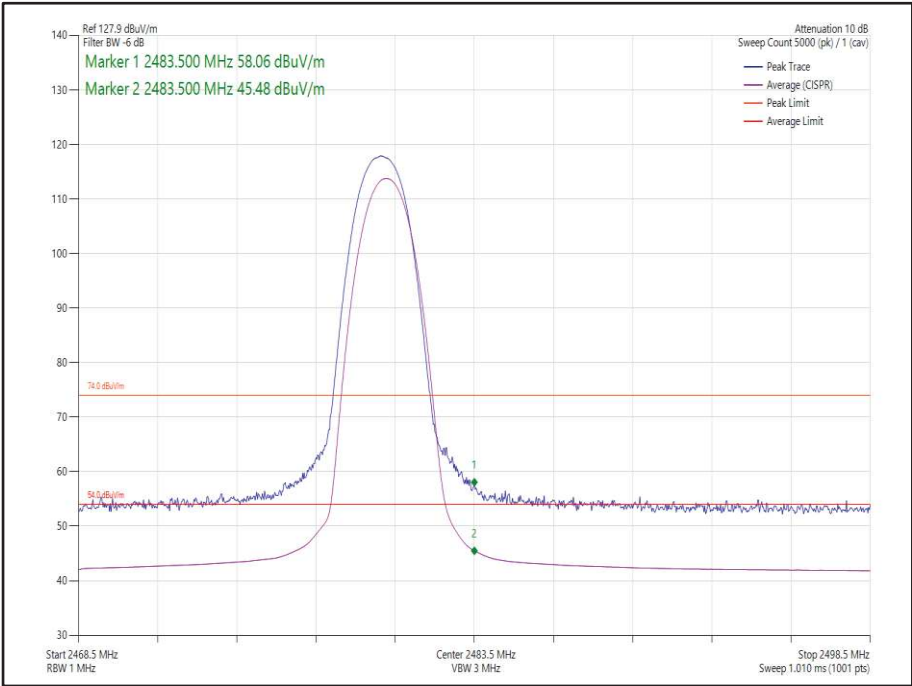


Figure 10 - Static - 8-DPSK/3-DH5 - 2480 MHz - Band Edge Frequency 2483.5 MHz



2.4 GHz Bluetooth (FHSS)

iPA

Mode	Modulation	Core	Packet Type	Tx Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
Static	GFSK	2	DH5	2402	2390.0	55.39	40.43
Static	π/4 DQPSK	2	2-DH5	2402	2390.0	54.95	40.53
Static	8-DPSK	2	3-DH5	2402	2390.0	55.53	40.50
Static	GFSK	2	DH5	2480	2483.5	54.42	41.85
Static	π/4 DQPSK	2	2-DH5	2480	2483.5	55.75	42.16
Static	8-DPSK	2	3-DH5	2480	2483.5	54.70	42.36

Table 9 - Restricted Band Edge Results

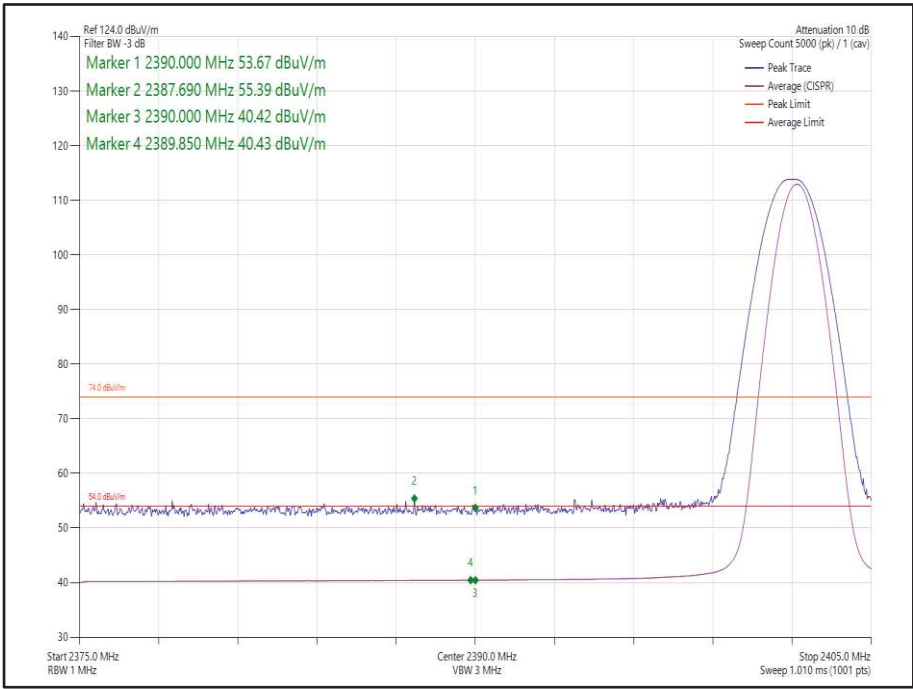


Figure 11 - Static - GFSK/DH5 - 2402 MHz - Band Edge Frequency 2390.0 MHz

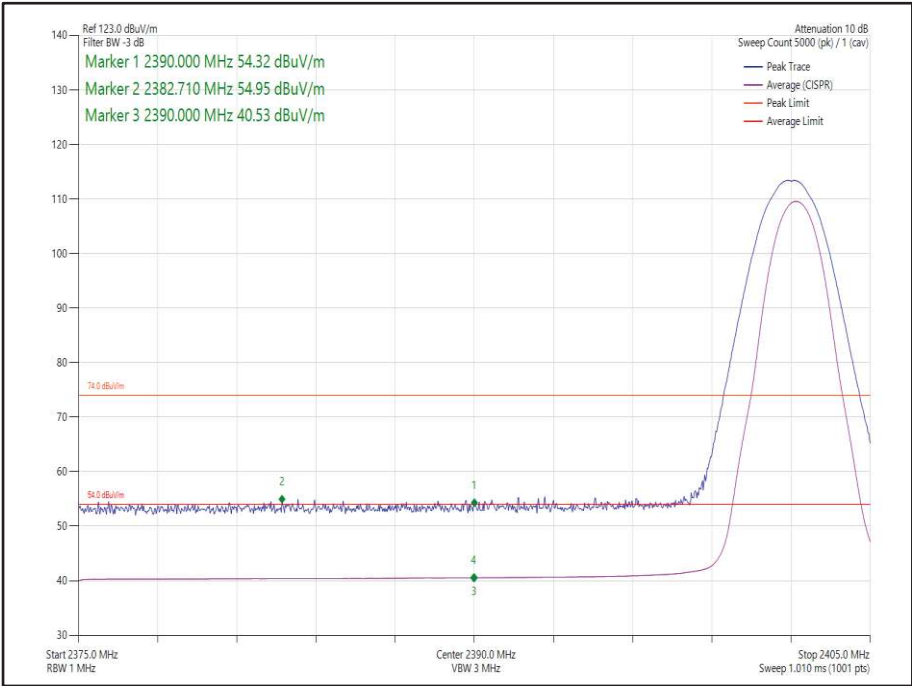


Figure 12 - Static - $\pi/4$ DQPSK/2-DH5 - 2402 MHz - Band Edge Frequency 2390.0 MHz

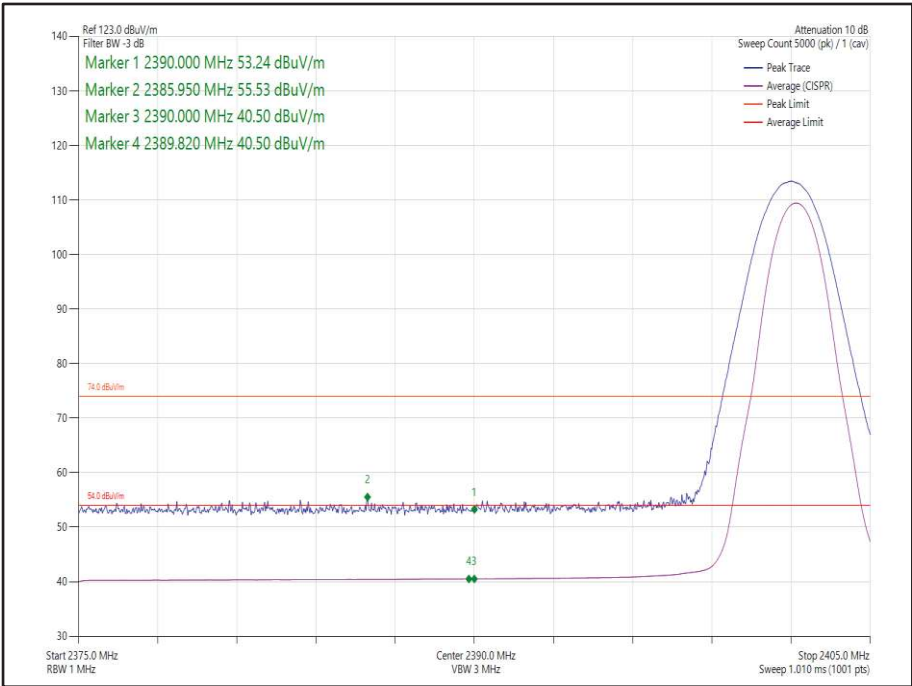


Figure 13 - Static - 8-DPSK/3-DH5 - 2402 MHz Band Edge Frequency 2390.0 MHz

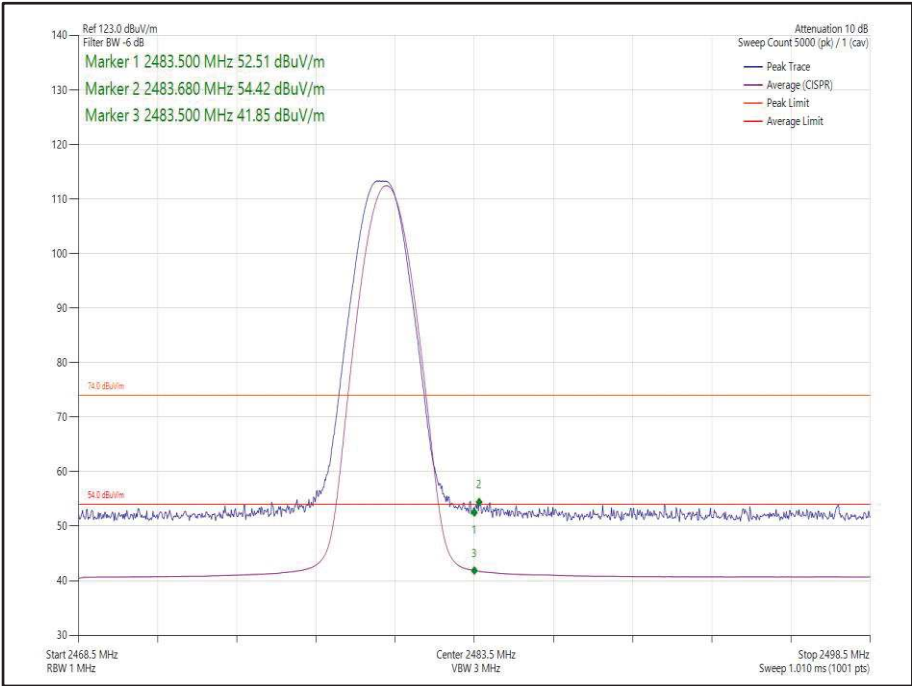


Figure 14 - Static - GFSK/DH5 - 2480 MHz - Band Edge Frequency 2483.5 MHz

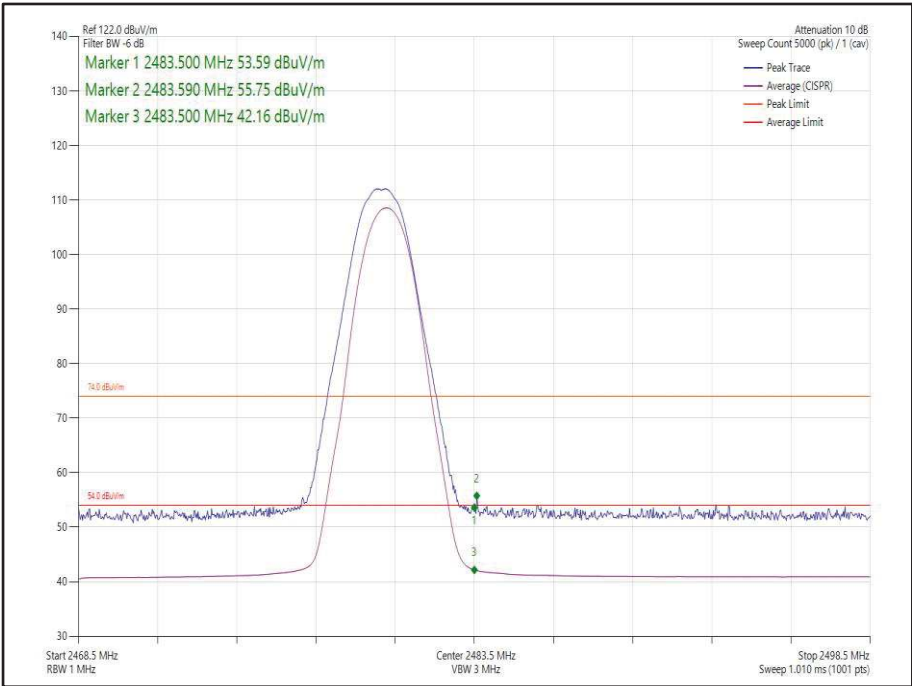


Figure 15 - Static - $\pi/4$ DQPSK/2-DH5 - 2480 MHz - Band Edge Frequency 2483.5 MHz

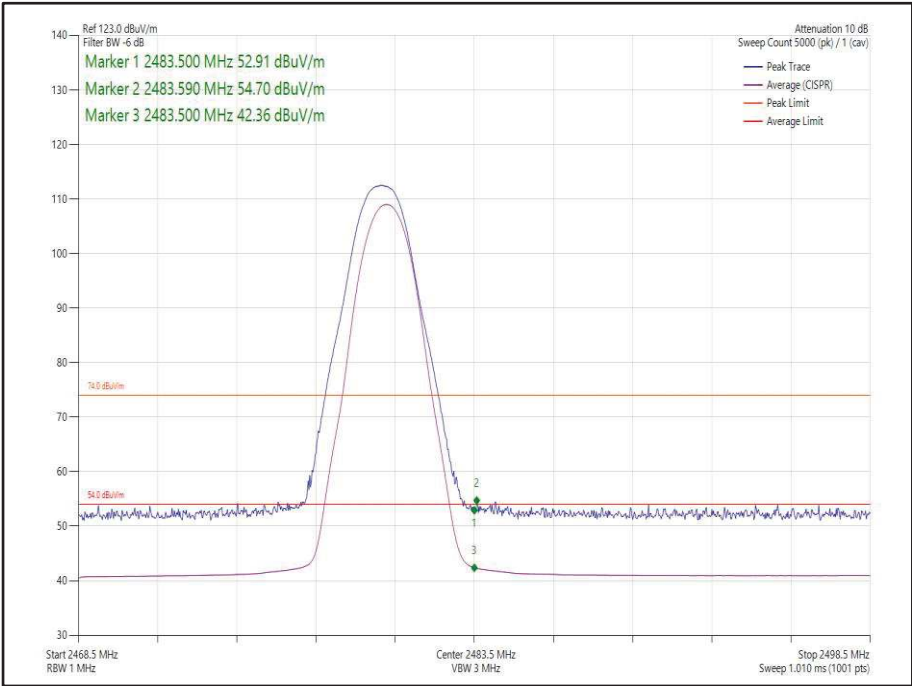


Figure 16 - Static - 8-DPSK/3-DH5 - 2480 MHz - Band Edge Frequency 2483.5 MHz



2.4 GHz Bluetooth (FHSS)

iPA

Mode	Modulation	Core	Packet Type	Tx Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
Static	GFSK	0-1	DH5	2402	2390.0	55.33	40.59
Static	π/4 DQPSK	0-1	2-DH5	2402	2390.0	55.52	40.68
Static	8-DPSK	0-1	3-DH5	2402	2390.0	54.85	40.67
Static	GFSK	0-1	DH5	2480	2483.5	54.86	43.37
Static	π/4 DQPSK	0-1	2-DH5	2480	2483.5	55.56	43.26
Static	8-DPSK	0-1	3-DH5	2480	2483.5	55.39	43.34

Table 10 - Restricted Band Edge Results

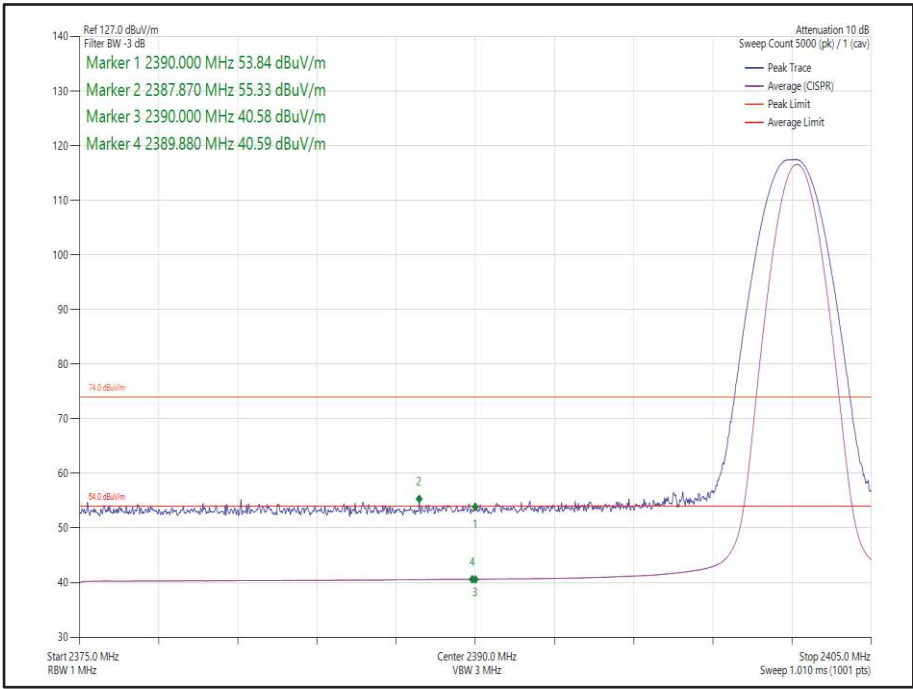


Figure 17 - Static - GFSK/DH5 - 2402 MHz - Band Edge Frequency 2390.0 MHz

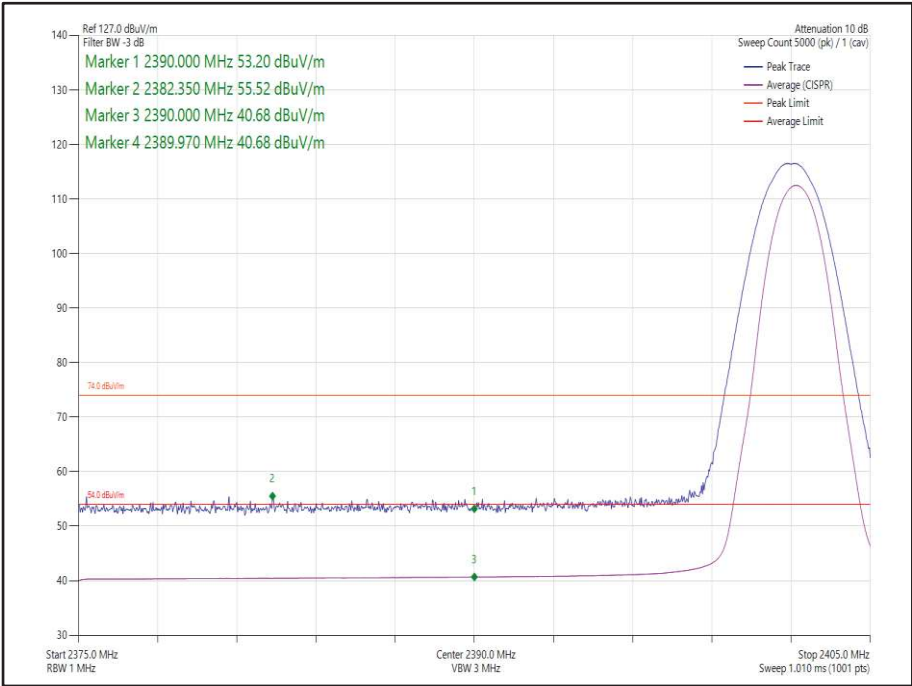


Figure 18 - Static - $\pi/4$ DQPSK/2-DH5 - 2402 MHz - Band Edge Frequency 2390.0 MHz

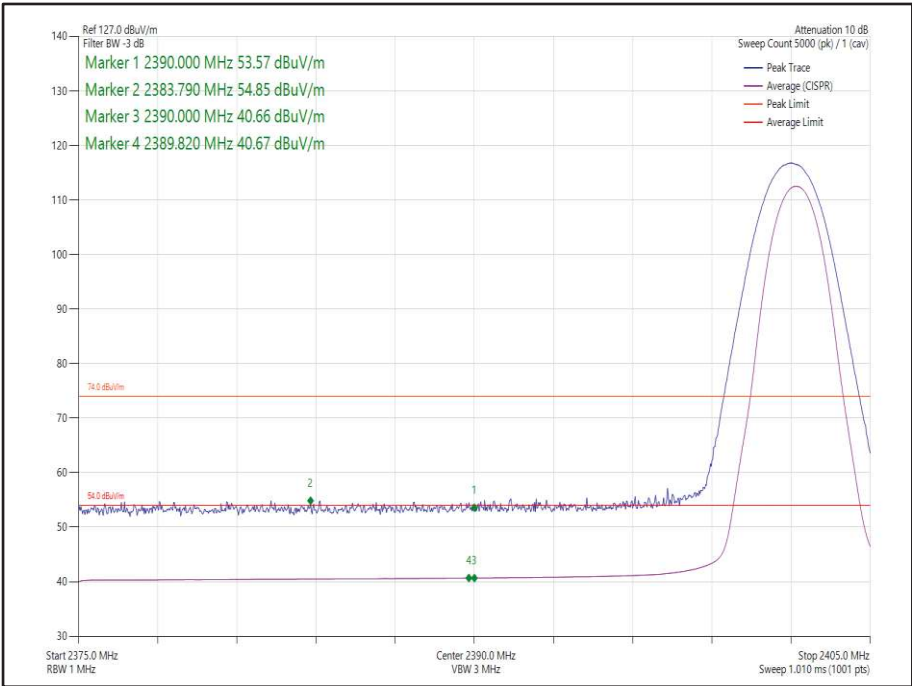


Figure 19 - Static - 8-DPSK/3-DH5 - 2402 MHz Band Edge Frequency 2390.0 MHz

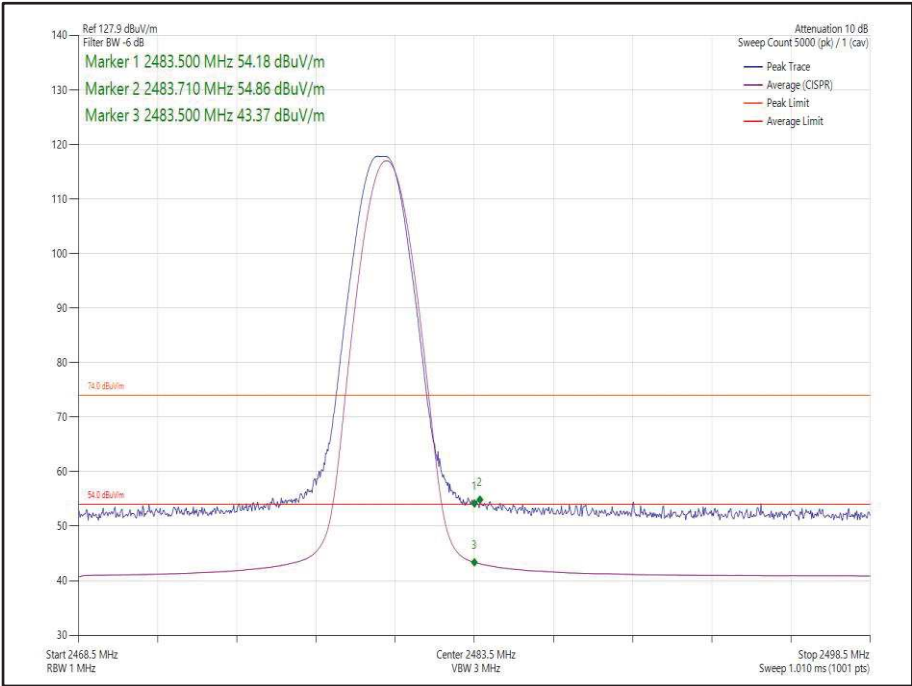


Figure 20 - Static - GFSK/DH5 - 2480 MHz - Band Edge Frequency 2483.5 MHz

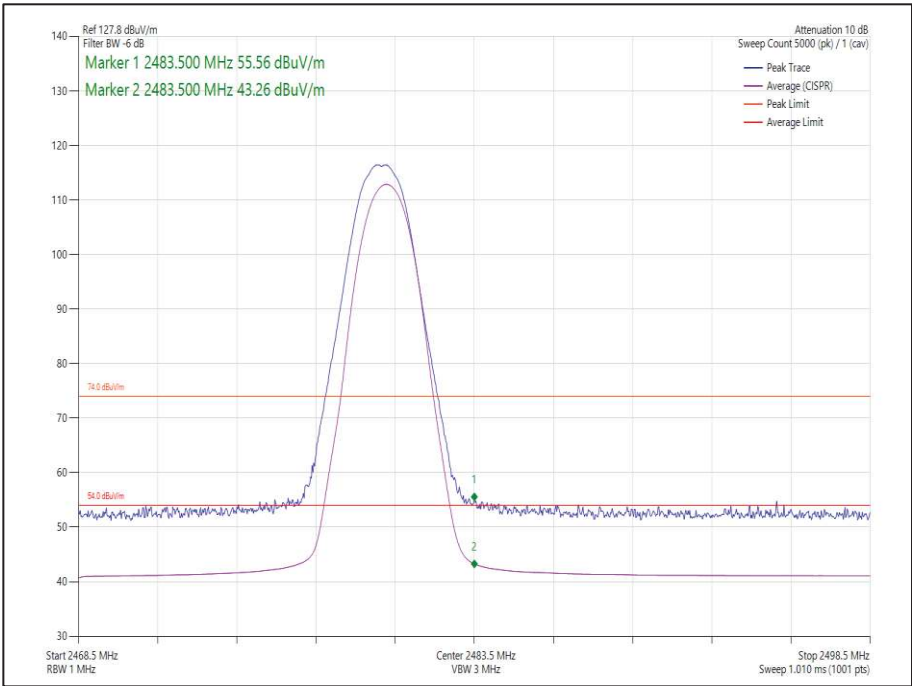


Figure 21 - Static - $\pi/4$ DQPSK/2-DH5 - 2480 MHz - Band Edge Frequency 2483.5 MHz

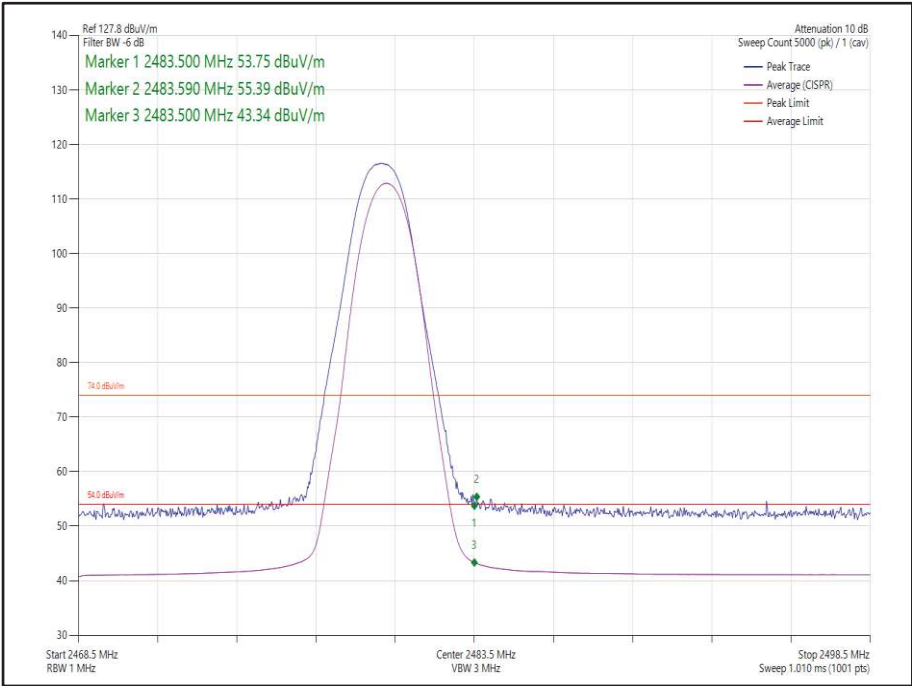


Figure 22 - Static - 8-DPSK/3-DH5 - 2480 MHz - Band Edge Frequency 2483.5 MHz



2.4 GHz Bluetooth (FHSS)

ePA

Mode	Modulation	Core	Packet Type	Tx Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBµV/m)	Average Level (dBµV/m)
Static	$\pi/4$ DQPSK	0-1	2-DH5	2402	2390.0	60.12	43.27
Static	8-DPSK	0-1	3-DH5	2402	2390.0	61.69	46.26
Static	$\pi/4$ DQPSK	0-1	2-DH5	2480	2483.5	58.82	46.76
Static	8-DPSK	0-1	3-DH5	2480	2483.5	58.67	47.48

Table 11 - Restricted Band Edge Results

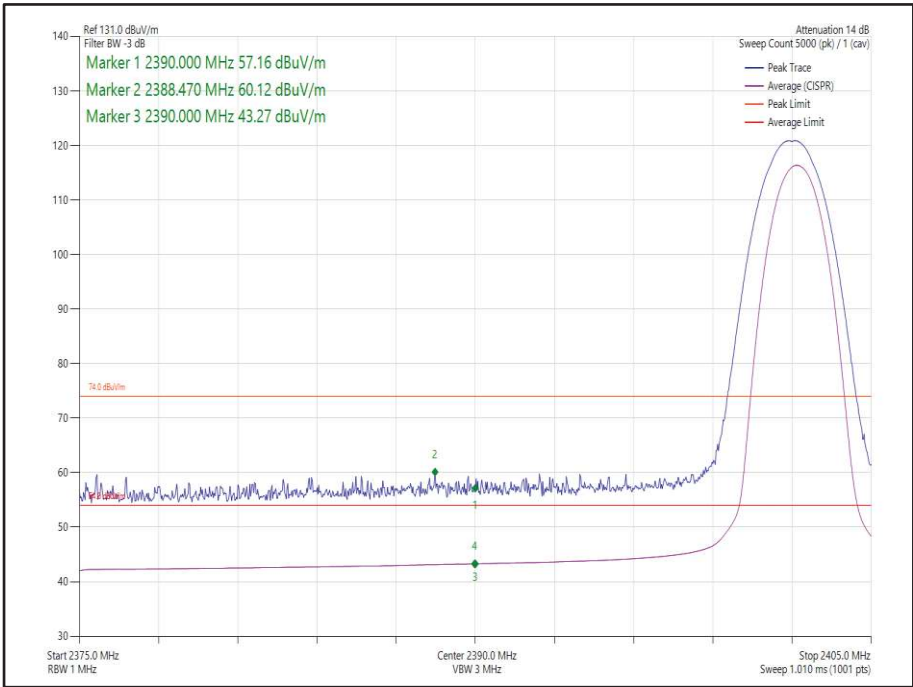


Figure 23 - Static - $\pi/4$ DQPSK/2-DH5 - 2402 MHz - Band Edge Frequency 2390.0 MHz

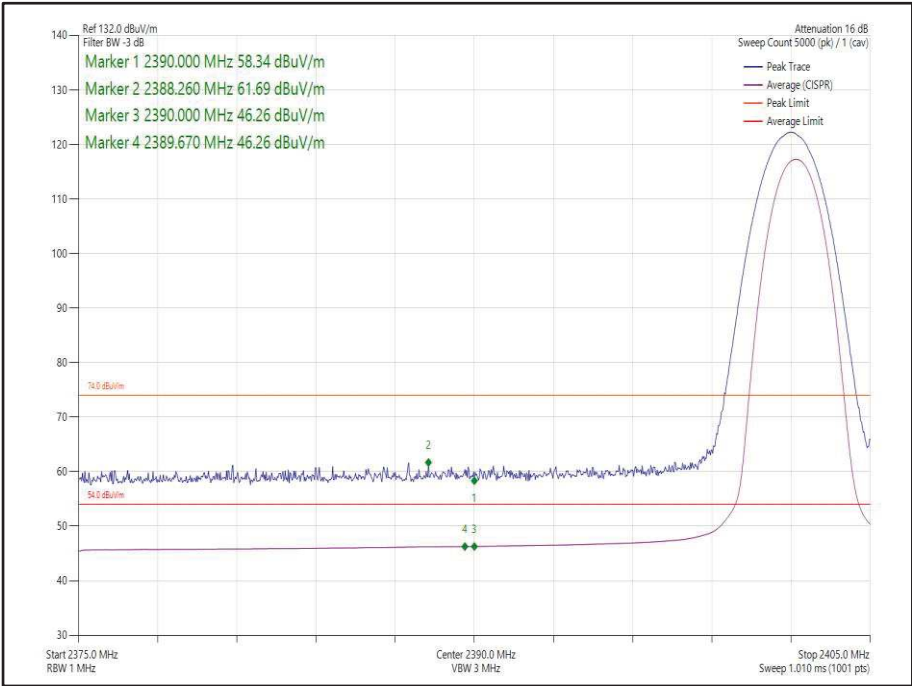


Figure 24 - Static - 8-DPSK/3-DH5 - 2402 MHz Band Edge Frequency 2390.0 MHz

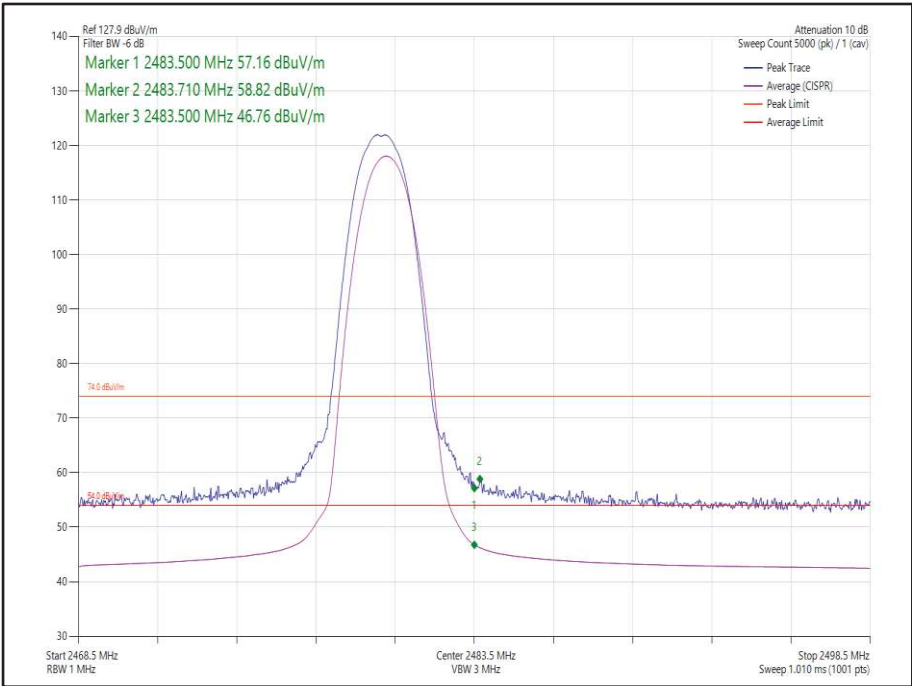


Figure 25 - Static - $\pi/4$ DQPSK/2-DH5 - 2480 MHz - Band Edge Frequency 2483.5 MHz

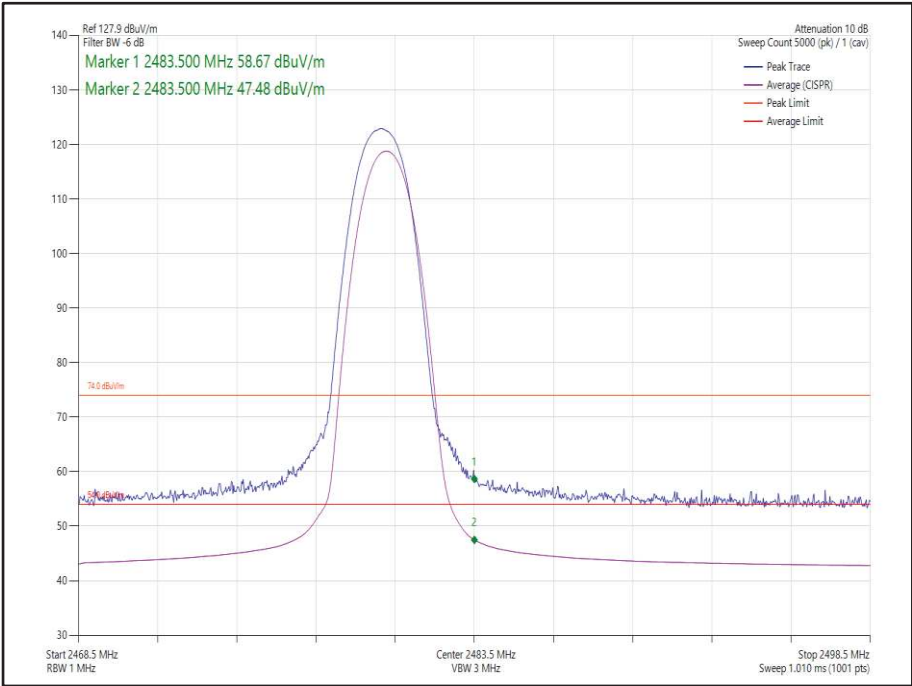


Figure 26 - Static - 8-DPSK/3-DH5 - 2480 MHz - Band Edge Frequency 2483.5 MHz



FCC 47 CFR Part 15, Limit Clause 15.209

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$ at 3 m)
30 to 88	100
88 to 216	150
216 to 960	200
Above 960	500

Table 12

ISED RSS-GEN, Limit Clause 8.9

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$ at 3 m)
30 to 88	100
88 to 216	150
216 to 960	200
Above 960*	500

Table 13

*Unless otherwise specified, for all frequencies greater than 1 GHz, the radiated emission limits for licence-exempt radio apparatus stated in applicable RSSs (including RSS-Gen) are based on measurements using a linear average detector function having a minimum resolution bandwidth of 1 MHz. If an average limit is specified for the EUT, then the peak emission shall also be measured with instrumentation properly adjusted for such factors as pulse desensitization to ensure the peak emission is less than 20 dB above the average limit.



2.1.7 Test Location and Test Equipment Used

This test was carried out in RF Chamber 14.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Expires
EMI Test Receiver	Rohde & Schwarz	ESW44	5912	12	17-Feb-2023
5m Semi-Anechoic Chamber (Dual-Axis)	Albatross Projects	RF Chamber 14	5958	36	26-Apr-2025
Mast & Turntable Controller	Maturo Gmbh	FCU3.0	5960	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	5961	-	TU
Turntable	Maturo Gmbh	TT1.5SI	5962	-	TU
Cable (SMA to SMA 1m)	Junkosha	MWX221-01000AMSAMS/A	5997	12	06-Jun-2023
Cable (SMA to SMA 6.5m)	Junkosha	MWX221-06500AMSAMS/B	6003	12	07-Jun-2023
Cable (SMA to SMA 1m)	Junkosha	MWX221-01000AMSAMS/A	6008	12	06-Jun-2023
Horn Antenna (1-10 GHz)	Schwarzbeck	BBHA9120B	6141	12	21-Jun-2023
SAC Switch Unit	TUV SUD	SSU001	6144	12	07-Jul-2023
Humidity & Temperature meter	R.S Components	1364	6150	12	17-Jun-2023

Table 14

TU – Traceability Unscheduled



2.2 Frequency Hopping Systems - Average Time of Occupancy

2.2.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (a)(1)
ISED RSS-247, Clause 5.1

2.2.2 Equipment Under Test and Modification State

A2779, S/N: NX7LCFL417 - Modification State 0

2.2.3 Date of Test

14-October-2022

2.2.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 7.8.4.

2.2.5 Environmental Conditions

Ambient Temperature	23.6 °C
Relative Humidity	50.4 %



2.2.6 Test Results

2.4 GHz Bluetooth - FHSS

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	52.7
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	1.982	107	212.0	400.0
2480	1.982	116	229.9	400.0

Table 15 - Time of Occupancy Results



Figure 27 - $\pi/4$ DQPSK - 2402 MHz Accumulated Transmit Time



Figure 28 - $\pi/4$ DQPSK - 2480 MHz Accumulated Transmit Time



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	52.8
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	1.986	112	222.4	400.0
2480	1.986	90	178.7	400.0

Table 16 - Time of Occupancy Results



Figure 29 - $\pi/4$ DQPSK - 2402 MHz Accumulated Transmit Time

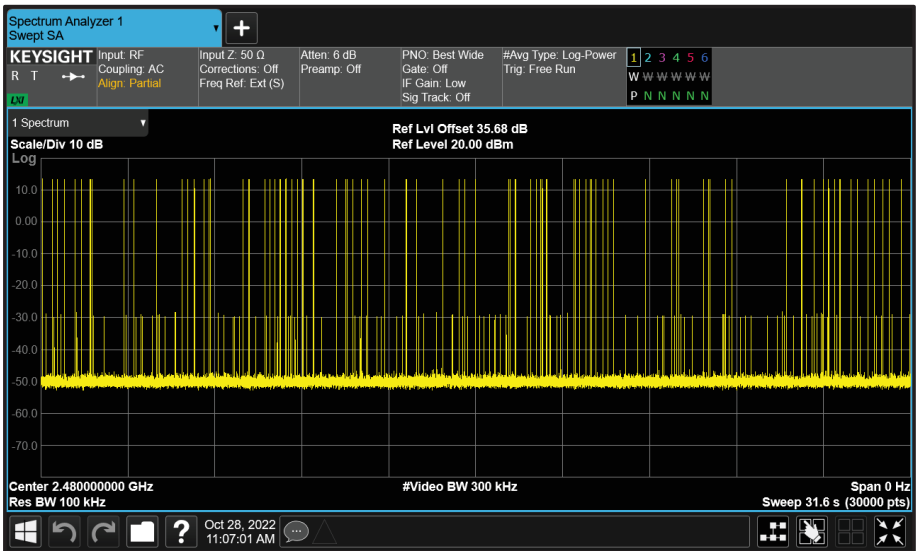


Figure 30 - $\pi/4$ DQPSK - 2480 MHz Accumulated Transmit Time



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (DH5)	Duty Cycle (%):	76.7
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.888	106	306.2	400.0
2480	2.888	100	288.8	400.0

Table 17 - Time of Occupancy Results



Figure 31 - GFSK - 2402 MHz Accumulated Transmit Time

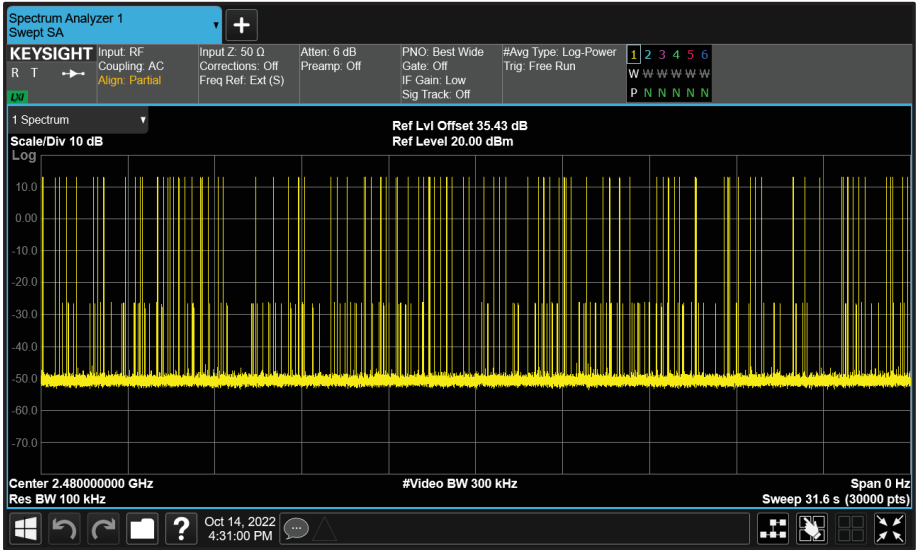


Figure 32 - GFSK - 2480 MHz Accumulated Transmit Time



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (DH5)	Duty Cycle (%):	76.7
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (BT Dedicated)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.888	89	257.1	400.0
2480	2.888	111	320.6	400.0

Table 18 - Time of Occupancy Results



Figure 33 - GFSK - 2402 MHz Accumulated Transmit Time

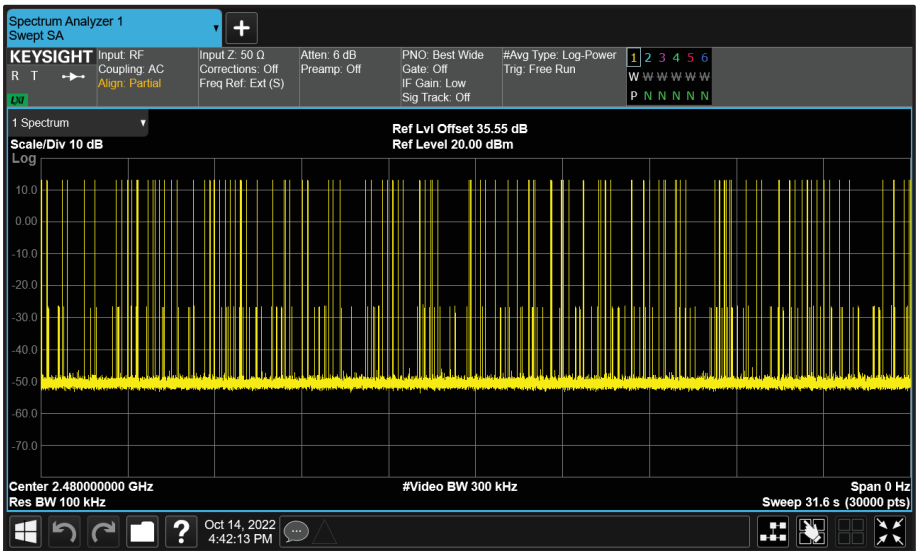


Figure 34 - GFSK - 2480 MHz Accumulated Transmit Time



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.4
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (DH5)	Duty Cycle (%):	76.7
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	Time of Occupancy			Limit (ms)
	Dwell Time (ms)	Number of Transmissions	Time of Occupancy (ms)	
2402	2.888	119	343.7	400.0
2480	2.888	96	277.3	400.0

Table 19 - Time of Occupancy Results

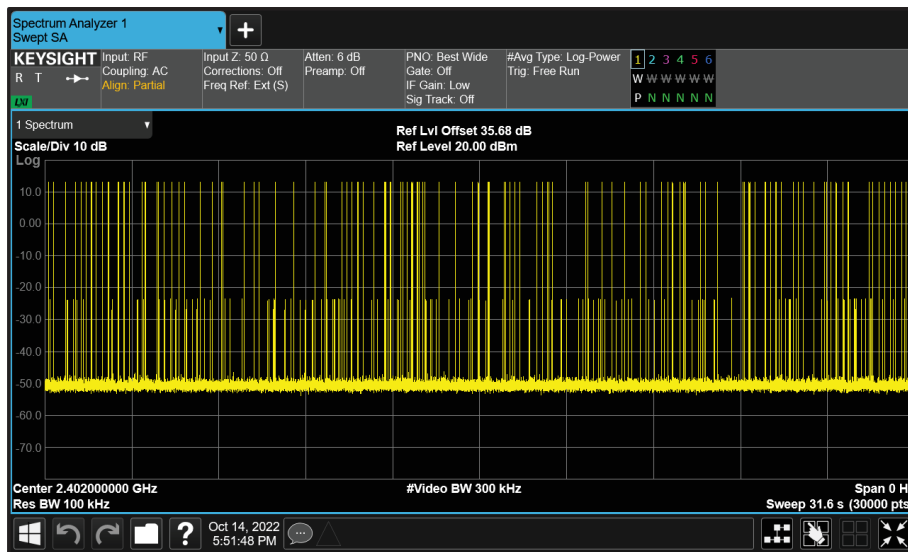


Figure 35 - GFSK - 2402 MHz Accumulated Transmit Time

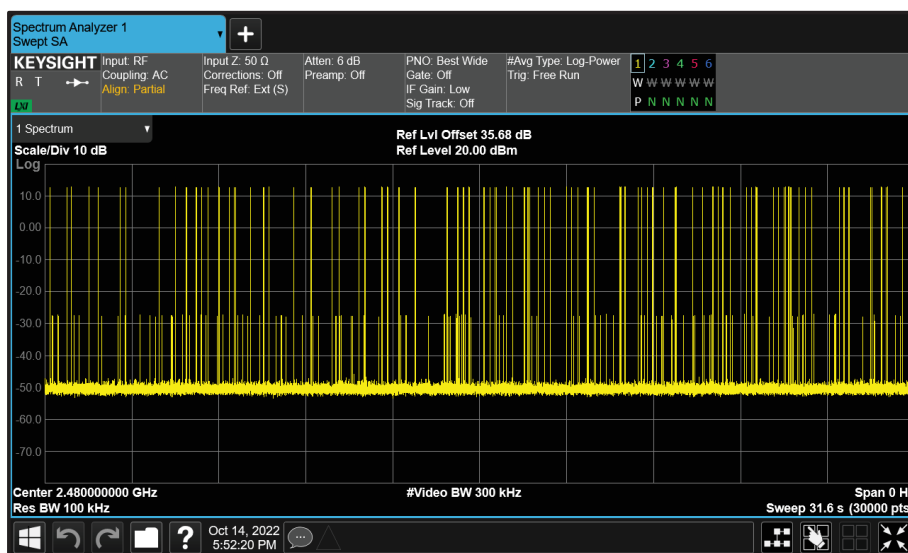


Figure 36 - GFSK - 2480 MHz Accumulated Transmit Time

FCC 47 CFR Part 15, Limit Clause 15.247 (a)(1)(iii)

Frequency hopping systems operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that a minimum of 15 hopping channels are used.

Industry Canada RSS-247, Limit Clause 5.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed.



2.2.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 1.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Expires
Multimeter	Fluke	79 Series III	611	12	21-Dec-2022
Hygrometer	Rotronic	I-1000	3220	12	05-Nov-2022
Frequency Standard	Spectracom	SecureSync 1200-0408-0601	4393	6	01-Feb-2023
AC Programmable Power Supply	iTech	IT7324	5226	-	O/P Mon
MXA Signal Analyser	Keysight Technologies	N9020B	5529	24	13-Sep-2024
Signal Conditioning Unit	TUV SUD	SPECTRUM SCU002	5759	12	05-Jul-2023

Table 20

O/P Mon – Output Monitored using calibrated equipment



2.3 Frequency Hopping Systems - Channel Separation

2.3.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (a)(1)
ISED RSS-247, Clause 5.1

2.3.2 Equipment Under Test and Modification State

A2779, S/N: NX7LCFL417 - Modification State 0

2.3.3 Date of Test

14-October-2022

2.3.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 7.8.2.

2.3.5 Environmental Conditions

Ambient Temperature	23.6 °C
Relative Humidity	50.4 %



2.3.6 Test Results

2.4 GHz Bluetooth - FHSS

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.349	2440.980	2441.979	0.999	≥ 899.2

Table 21 - Carrier Frequency Separation Results



Figure 37 - $\pi/4$ DQPSK - 2441 MHz (CH39)



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA 8-DPSK (3-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.321	2440.988	2441.988	1.000	≥880.8

Table 22 - Carrier Frequency Separation Results



Figure 38 - 8-DPSK - 2441 MHz (CH39)



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.325	2440.980	2441.980	1.000	≥ 883.3

Table 23 - Carrier Frequency Separation Results



Figure 39 - $\pi/4$ DQPSK - 2441 MHz (CH39)



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA 8-DPSK (3-DH5)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.260	2440.987	2441.986	0.999	≥840.0

Table 24 - Carrier Frequency Separation Results



Figure 40 - 8-DPSK - 2441 MHz (CH39)



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	0.928	2440.998	2441.999	1.001	≥618.6

Table 25 - Carrier Frequency Separation Results

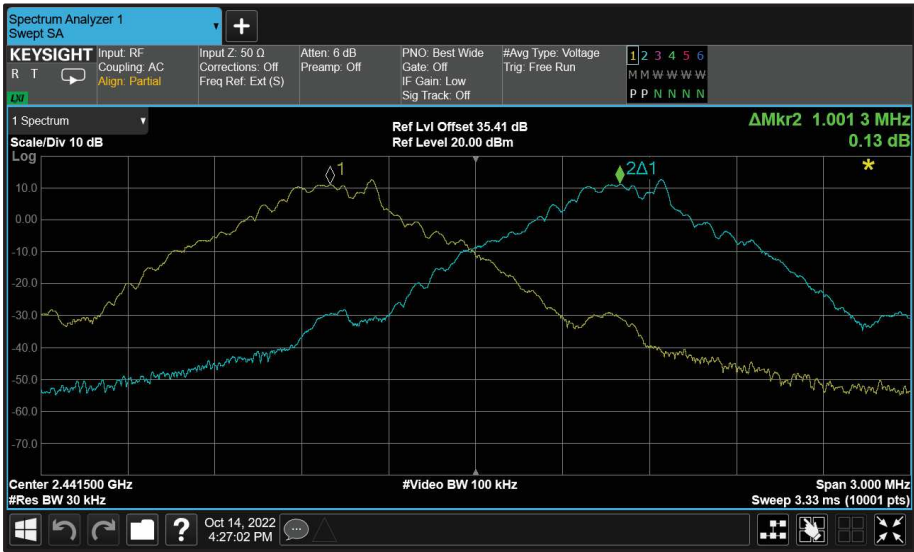


Figure 41 - GFSK - 2441 MHz (CH39)



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.350	2440.981	2441.981	1.000	≥ 900.3

Table 26 - Carrier Frequency Separation Results

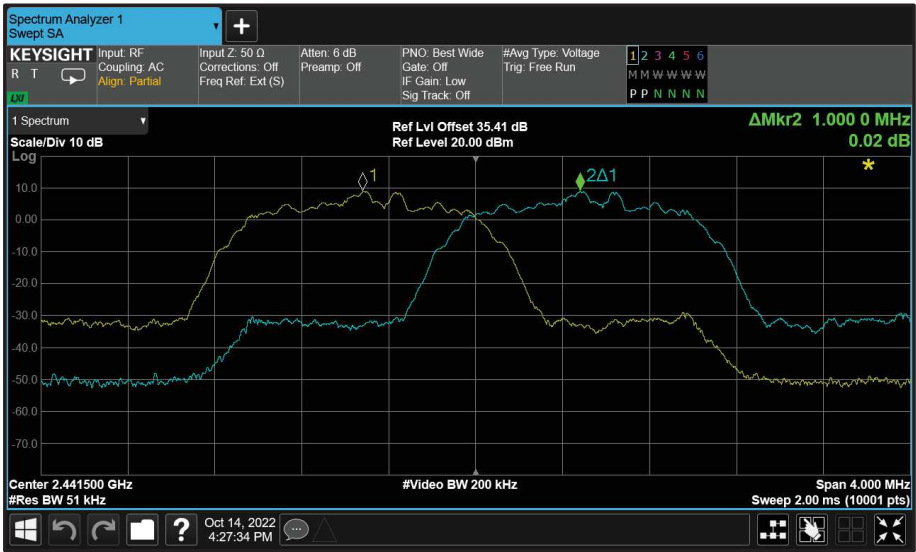


Figure 42 - $\pi/4$ DQPSK - 2441 MHz (CH39)



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA 8-DPSK (3-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.323	2440.988	2441.988	1.000	≥882.1

Table 27 - Carrier Frequency Separation Results



Figure 43 - 8-DPSK - 2441 MHz (CH39)



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (BT Dedicated)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	0.930	2440.999	2441.999	1.000	≥619.8

Table 28 - Carrier Frequency Separation Results

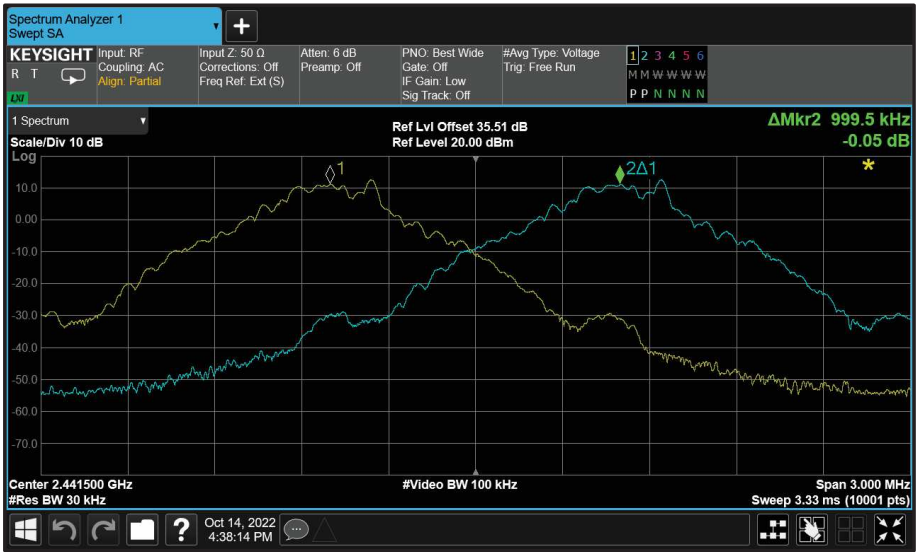


Figure 44 - GFSK - 2441 MHz (CH39)



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (BT Dedicated)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.348	2440.982	2441.982	1.000	≥ 898.9

Table 29 - Carrier Frequency Separation Results



Figure 45 - $\pi/4$ DQPSK - 2441 MHz (CH39)



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA 8-DPSK (3-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (BT Dedicated)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.322	2440.989	2441.989	1.000	≥881.1

Table 30 - Carrier Frequency Separation Results



Figure 46 - 8-DPSK - 2441 MHz (CH39)



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (DH5)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	0.855	2440.998	2441.998	1.000	≥570.0

Table 31 - Carrier Frequency Separation Results

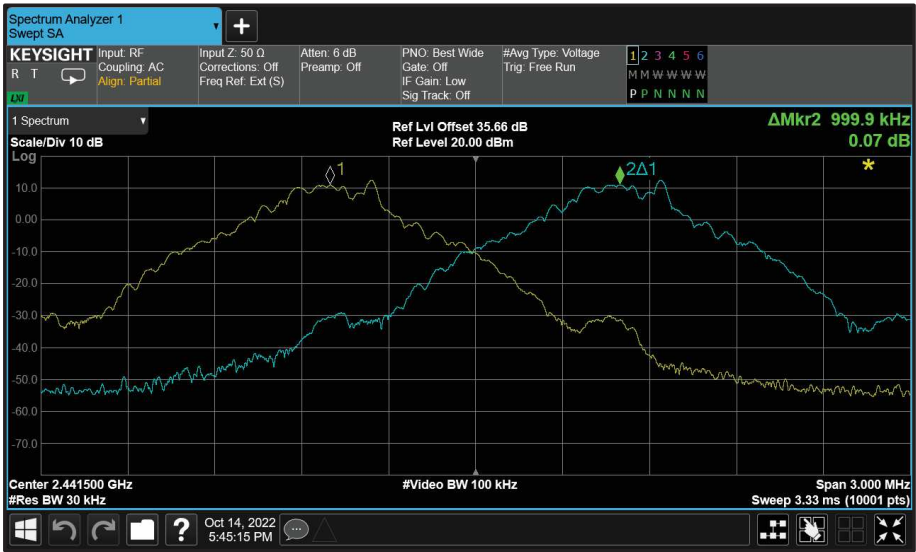


Figure 47 - GFSK - 2441 MHz (CH39)



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.330	2440.981	2441.980	0.999	≥ 886.7

Table 32 - Carrier Frequency Separation Results



Figure 48 - $\pi/4$ DQPSK - 2441 MHz (CH39)



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1) RSS-247 5.1 b)	Test Method(s):	C63.10 7.8.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA 8-DPSK (3-DH5)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)	Carrier Frequency Separation (MHz)			Limit (kHz)
		F1C	F2C	FHS	
2441	1.255	2440.989	2441.989	1.000	≥836.7

Table 33 - Carrier Frequency Separation Results



Figure 49 - 8-DPSK - 2441 MHz (CH39)



FCC 47 CFR Part 15, Limit Clause 15.247 (a)(1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125 W.

ISED RSS-247, Limit Clause 5.1 (b)

FHSs shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the -20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, FHSs operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W.

2.3.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 1.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Expires
Multimeter	Fluke	79 Series III	611	12	21-Dec-2022
Hygrometer	Rotronic	I-1000	3220	12	05-Nov-2022
Frequency Standard	Spectracom	SecureSync 1200-0408-0601	4393	6	01-Feb-2023
AC Programmable Power Supply	iTech	IT7324	5226	-	O/P Mon
MXA Signal Analyser	Keysight Technologies	N9020B	5529	24	13-Sep-2024
Signal Conditioning Unit	TUV SUD	SPECTRUM SCU002	5759	12	05-Jul-2023

Table 34

O/P Mon – Output Monitored using calibrated equipment



2.4 Frequency Hopping Systems - Number of Hopping Channels

2.4.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (a)(1)
ISED RSS-247, Clause 5.1

2.4.2 Equipment Under Test and Modification State

A2779, S/N: NX7LCFL417 - Modification State 0

2.4.3 Date of Test

14-October-2022

2.4.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 7.8.3.

2.4.5 Environmental Conditions

Ambient Temperature	23.6 °C
Relative Humidity	50.4 %



2.4.6 Test Results

2.4 GHz Bluetooth - FHSS

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.3
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Number of Hopping Frequencies		Limit
79		≥ 15.0

Table 35 - Number of Hopping Frequencies Results

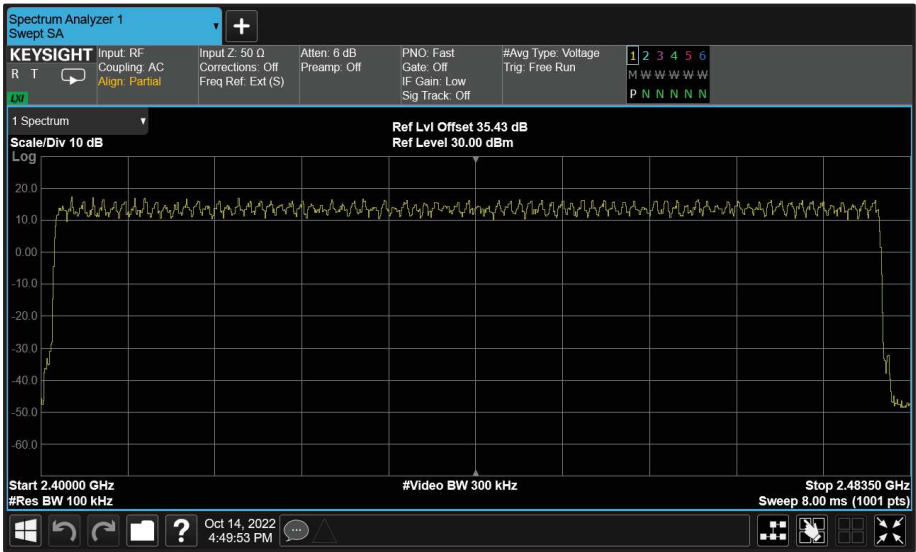


Figure 50 - $\pi/4$ DQPSK (2-DH5) - Number of Hopping Channels



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.3
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Number of Hopping Frequencies	Limit
79	≥ 15.0

Table 36 - Number of Hopping Frequencies Results

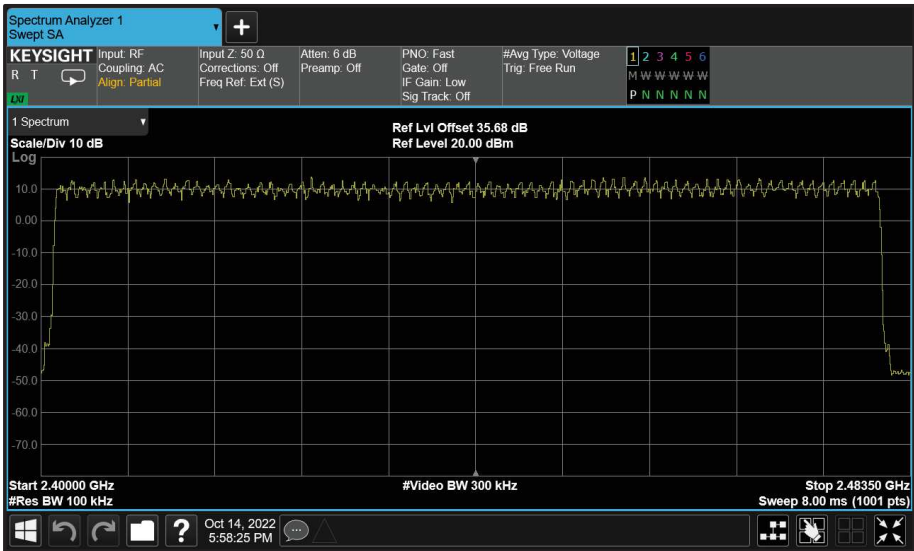


Figure 51 - $\pi/4$ DQPSK (2-DH5) - Number of Hopping Channels



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.3
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Number of Hopping Frequencies		Limit
79		≥15.0

Table 37 - Number of Hopping Frequencies Results

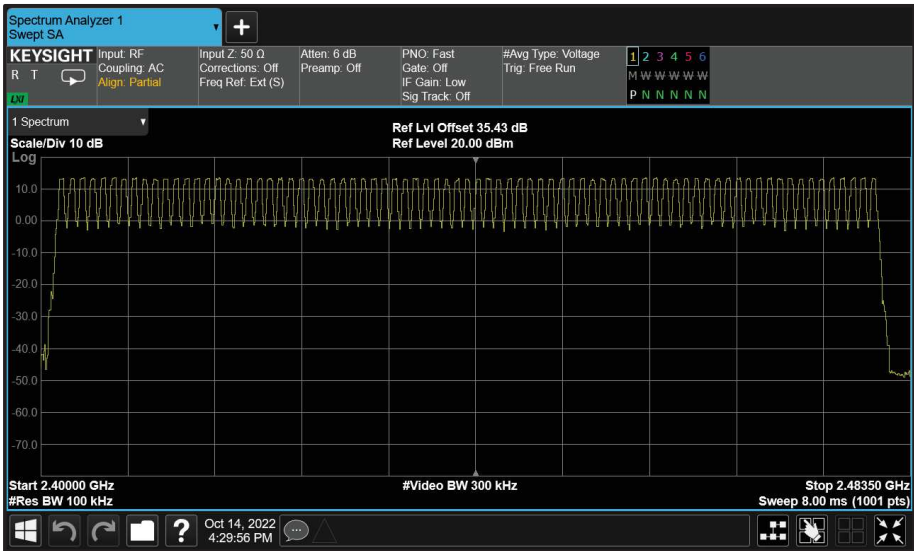


Figure 52 - GFSK (DH5) - Number of Hopping Channels



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.3
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (BT Dedicated)	Peak Antenna Gain (dBi):	-

Number of Hopping Frequencies		Limit
79		≥15.0

Table 38 - Number of Hopping Frequencies Results

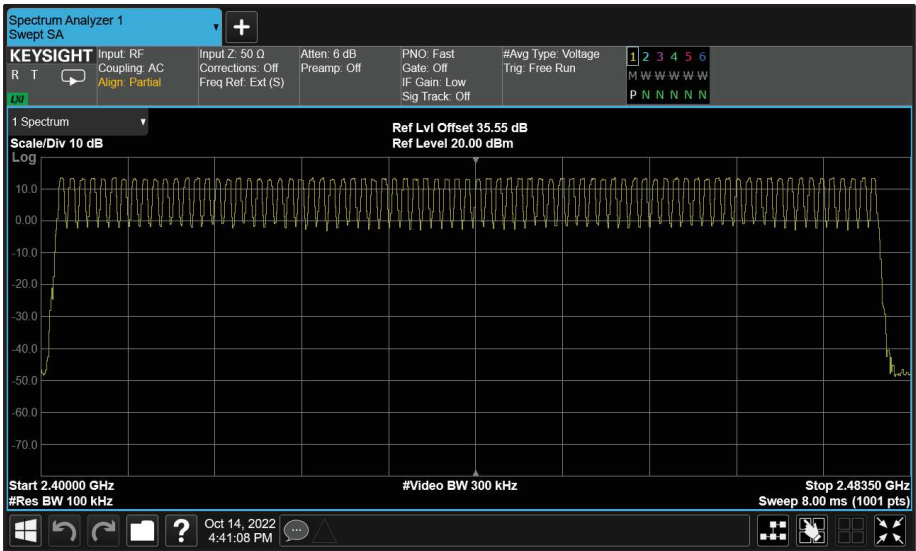


Figure 53 - GFSK (DH5) - Number of Hopping Channels



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247(a)(1)(iii) RSS-247 5.1 d)	Test Method(s):	C63.10 7.8.3
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (DH5)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Number of Hopping Frequencies	Limit
79	≥15.0

Table 39 - Number of Hopping Frequencies Results

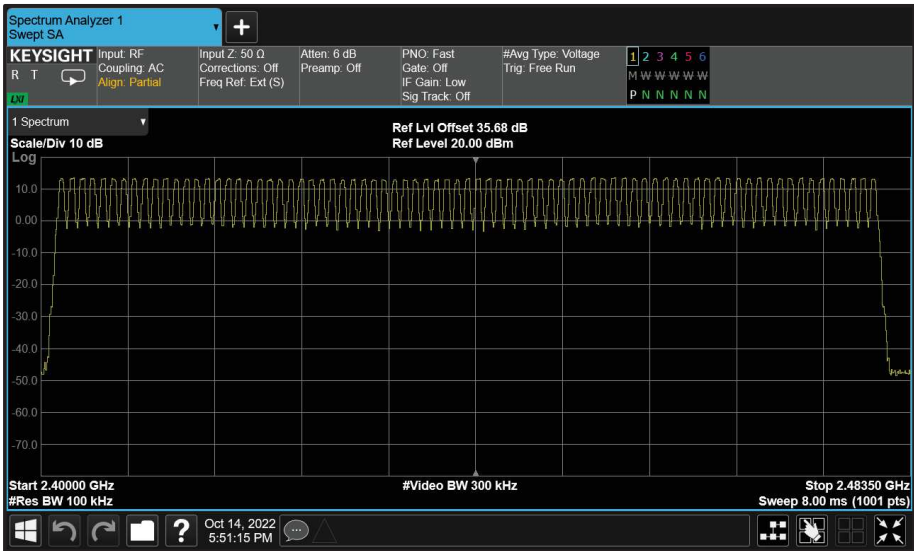


Figure 54 - GFSK (DH5) - Number of Hopping Channels

FCC 47 CFR Part 15, Limit Clause 15.247 (a)(1)(iii)

≥ 15 channels

ISED RSS-247, Limit Clause 5.1 (d)

FHSs operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels.



2.4.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 1.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Expires
Multimeter	Fluke	79 Series III	611	12	21-Dec-2022
Hygrometer	Rotronic	I-1000	3220	12	05-Nov-2022
Frequency Standard	Spectracom	SecureSync 1200-0408-0601	4393	6	01-Feb-2023
AC Programmable Power Supply	iTech	IT7324	5226	-	O/P Mon
MXA Signal Analyser	Keysight Technologies	N9020B	5529	24	13-Sep-2024
Signal Conditioning Unit	TUV SUD	SPECTRUM SCU002	5759	12	05-Jul-2023

Table 40

O/P Mon – Output Monitored using calibrated equipment



2.5 Frequency Hopping Systems - 20 dB Bandwidth

2.5.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (a)(1)
ISED RSS-247, Clause 5.1
ISED RSS-GEN, Clause 6.7

2.5.2 Equipment Under Test and Modification State

A2779, S/N: NX7LCFL417 - Modification State 0

2.5.3 Date of Test

14-October-2022

2.5.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 6.9.2.

2.5.5 Environmental Conditions

Ambient Temperature	23.6 °C
Relative Humidity	50.4 %



2.5.6 Test Results

2.4 GHz Bluetooth - FHSS

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1) RSS-247 5.1	Test Method(s):	C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)			
	A	B	C	D
2402	-	1.330	-	-
2441	-	1.325	-	-
2480	-	1.330	-	-

Table 41 - 20 dB Bandwidth Results

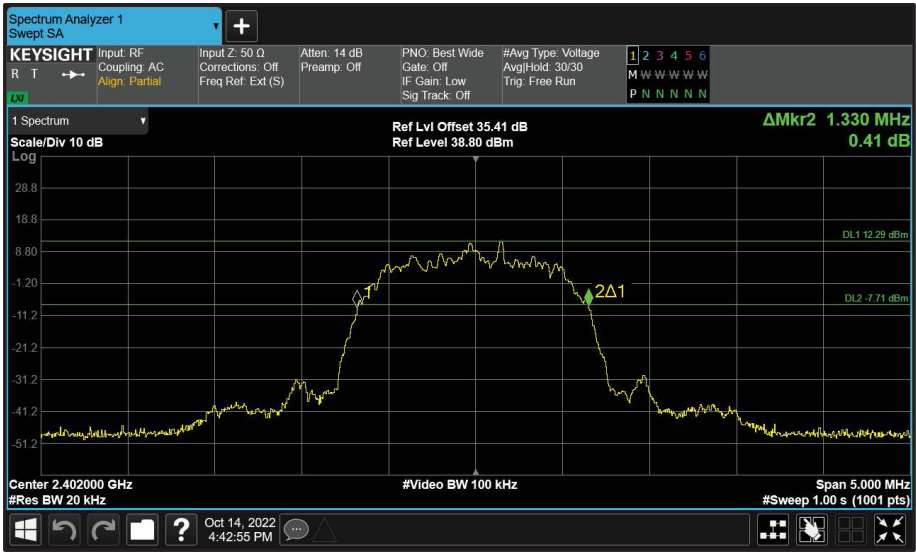


Figure 55 - Core 1 (B) 2402 MHz (CH0) 20 dB Bandwidth



Figure 56 - Core 1 (B) 2441 MHz (CH39) 20 dB Bandwidth

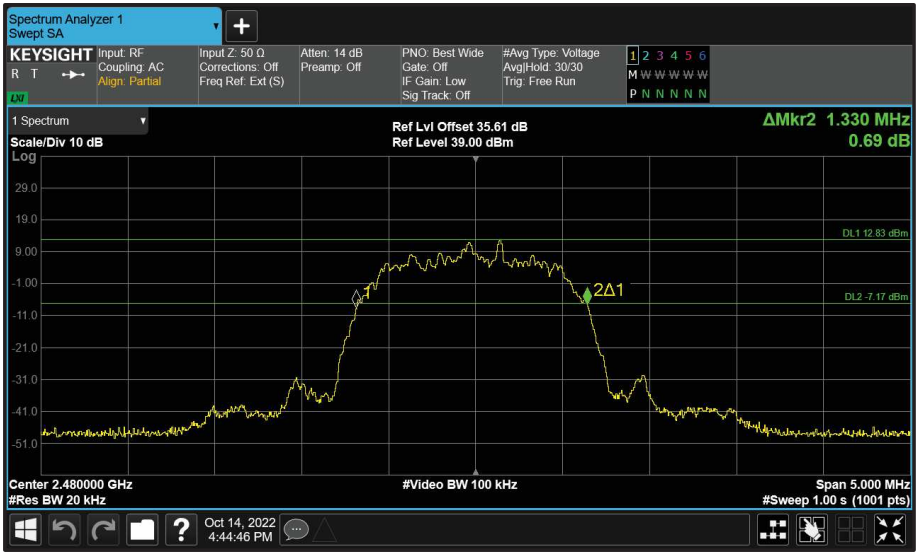


Figure 57 - Core 1 (B) 2480 MHz (CH78) 20 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1) RSS-247 5.1	Test Method(s):	C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA 8-DPSK (3-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)			
	A	B	C	D
2402	-	1.260	-	-
2441	-	1.260	-	-
2480	-	1.260	-	-

Table 42 - 20 dB Bandwidth Results

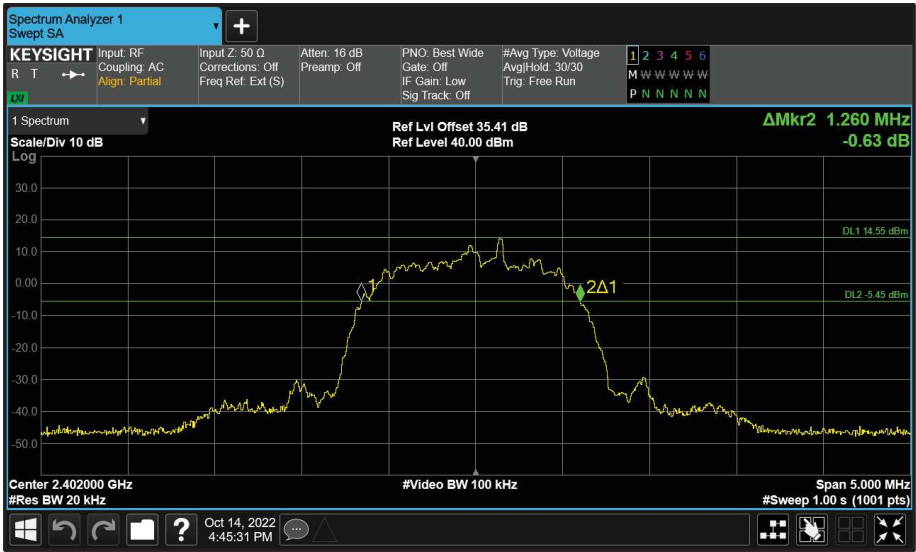


Figure 58 - Core 1 (B) 2402 MHz (CH0) 20 dB Bandwidth



Figure 59 - Core 1 (B) 2441 MHz (CH39) 20 dB Bandwidth

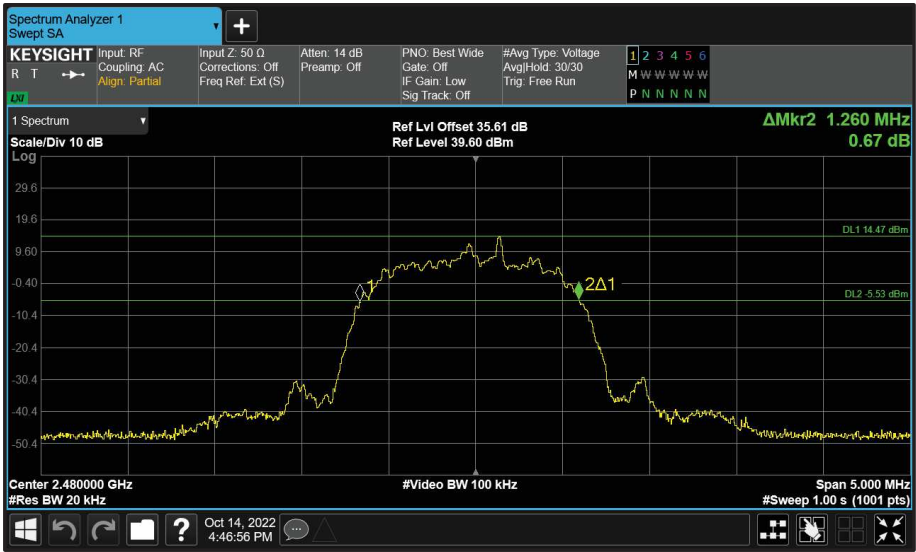


Figure 60 - Core 1 (B) 2480 MHz (CH78) 20 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	FCC 15.247 (a)(1) RSS-247 5.1	Test Method(s):	C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	20 dB Bandwidth (MHz)			
	A	B	C	D
2402	1.330	1.330	-	-
2441	1.325	1.325	-	-
2480	1.330	1.330	-	-

Table 43 - 20 dB Bandwidth Results

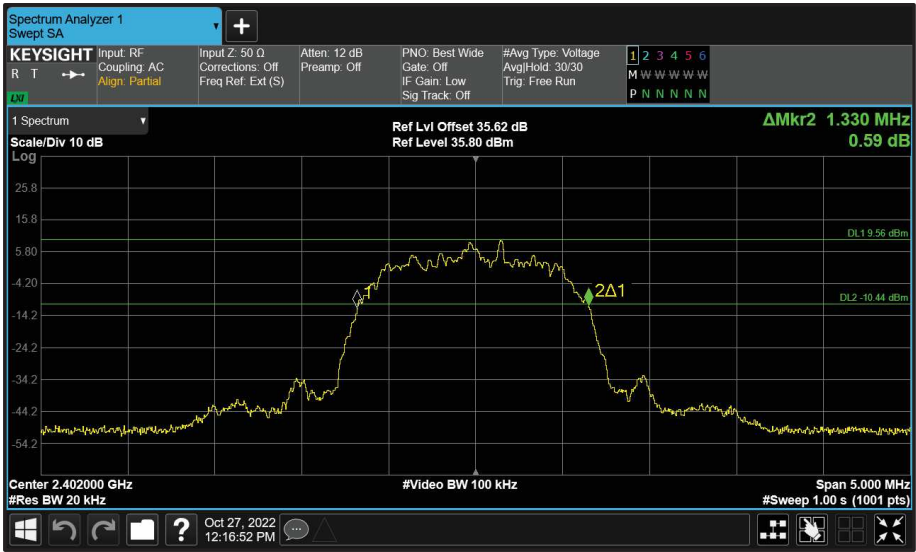


Figure 61 - Core 0 (A) 2402 MHz (CH0) 20 dB Bandwidth

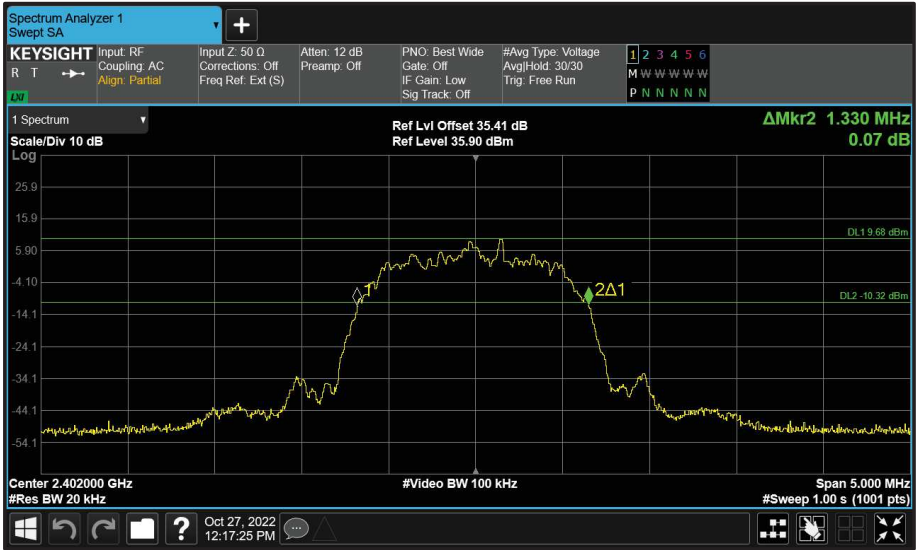


Figure 62 - Core 1 (B) 2402 MHz (CH0) 20 dB Bandwidth

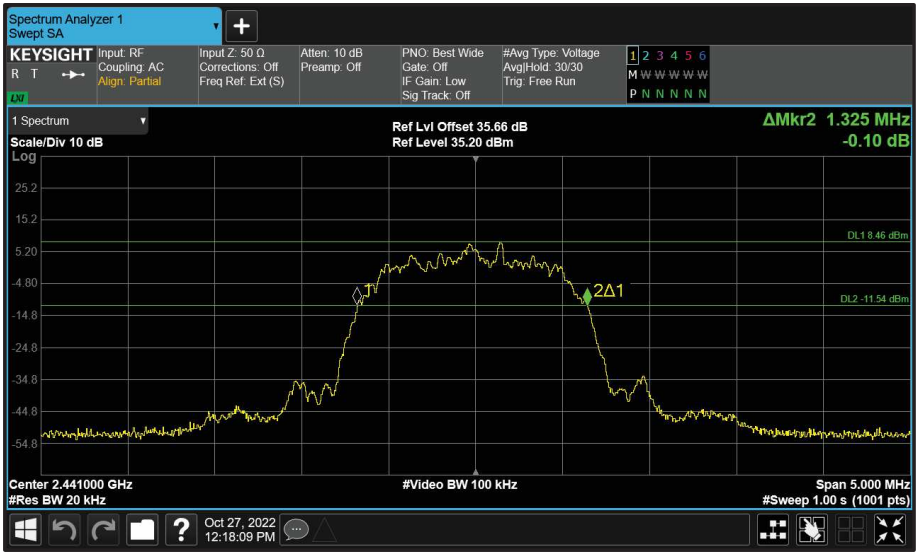


Figure 63 - Core 0 (A) 2441 MHz (CH39) 20 dB Bandwidth



Figure 64 - Core 1 (B) 2441 MHz (CH39) 20 dB Bandwidth