




**Plot 7-1125. LPI In-Band Emission Plot SDM Diversity Antenna 4a (20MHz 802.11ax (UNII Band 8) – Ch. 209, MCS11)**

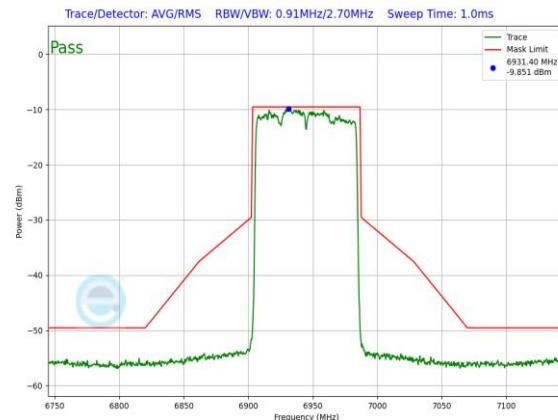

**Plot 7-1127. LPI In-Band Emission Plot SDM Diversity Antenna 4a (80MHz 802.11ax (UNII Band 8) – Ch. 199, MCS11)**

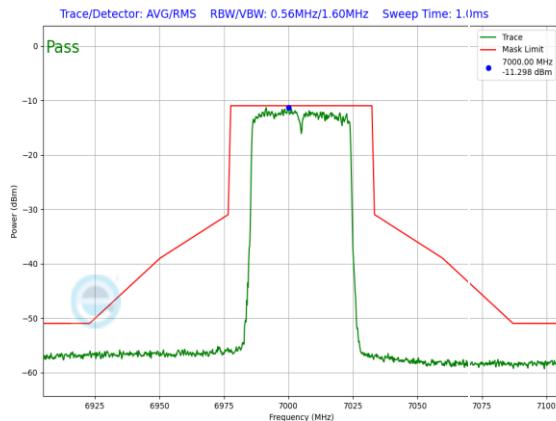


**Plot 7-1126. LPI In-Band Emission Plot SDM Diversity Antenna 4a (40MHz 802.11ax (UNII Band 8) – Ch. 211, MCS11)**

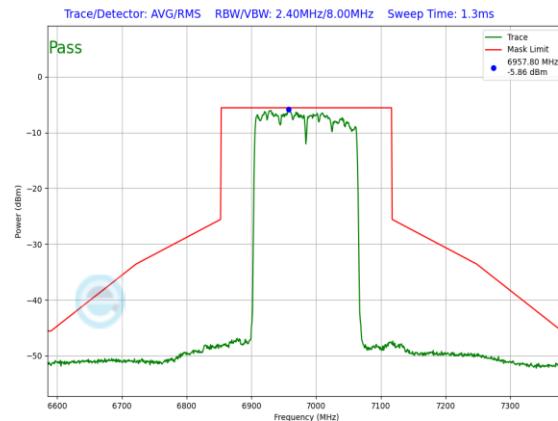


**Plot 7-1128. LPI In-Band Emission Plot SDM Diversity Antenna 4a (160MHz 802.11ax (UNII Band 8) – Ch. 207, MCS11)**


FCC ID: BCGA2837 IC: 579C-A2837	 <b>element</b>	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2311270068-24-R2.BCG	<b>Test Dates:</b> 11/28/2023 - 04/04/2024	<b>EUT Type:</b> Tablet Device	<b>Page 322 of 510</b>

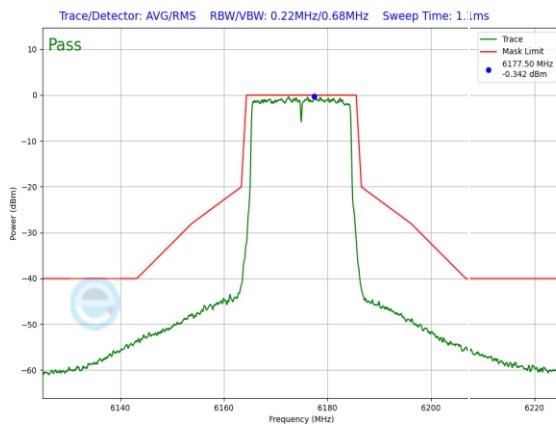**Low Data Rate**


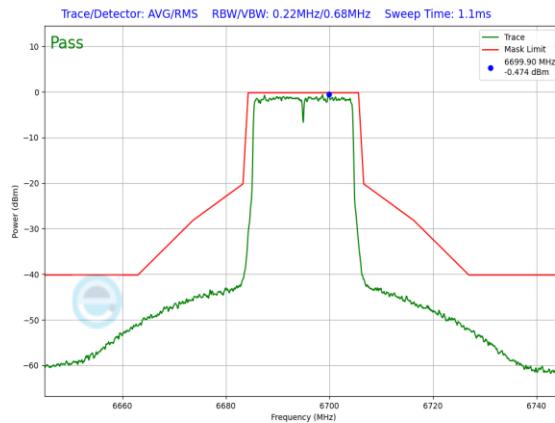
**Plot 7-1129. SP In-Band Emission Plot SDM Diversity Antenna 4a (20MHz 802.11ax (UNII Band 5) – Ch. 45, MCS2)**

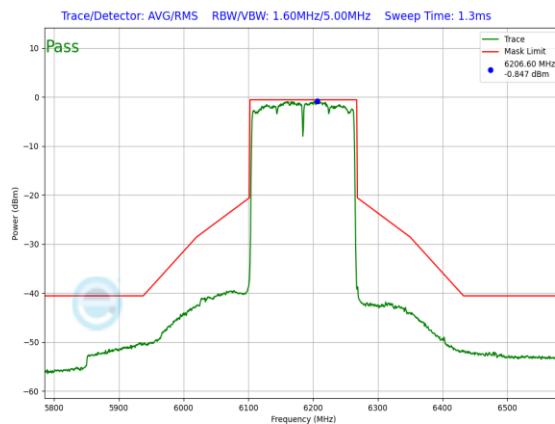


**Plot 7-1132. SP In-Band Emission Plot SDM Diversity Antenna 4a (160MHz 802.11ax (UNII Band 5) – Ch. 47, MCS2)**

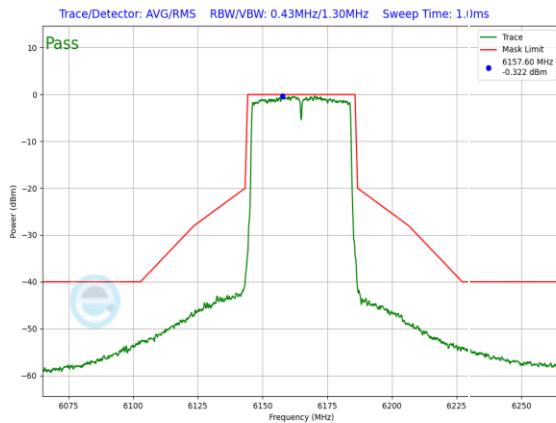


**Plot 7-1130. SP In-Band Emission Plot SDM Diversity Antenna 4a (40MHz 802.11ax (UNII Band 5) – Ch. 43, MCS2)**



**Plot 7-1133. SP In-Band Emission Plot SDM Diversity Antenna 4a (20MHz 802.11ax (UNII Band 7) – Ch. 149, MCS2)**

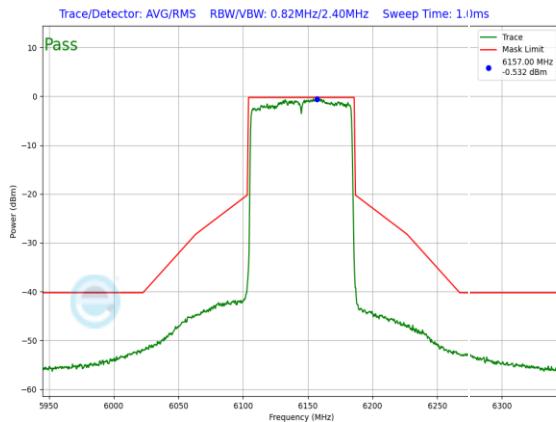


**Plot 7-1131. SP In-Band Emission Plot SDM Diversity Antenna 4a (80MHz 802.11ax (UNII Band 5) – Ch. 39, MCS2)**

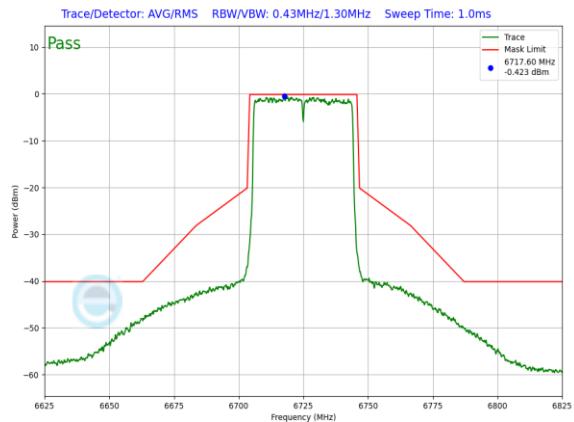


**Plot 7-1134. SP In-Band Emission Plot SDM Diversity Antenna 4a (40MHz 802.11ax (UNII Band 7) – Ch. 155, MCS2)**

FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 323 of 510






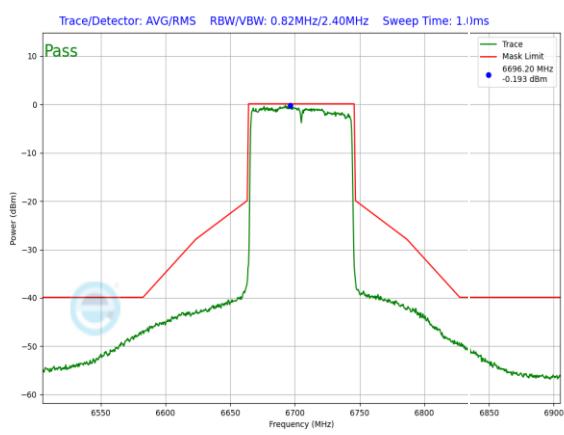


**Plot 7-1135. SP In-Band Emission Plot SDM Diversity Antenna 4a  
(80MHz 802.11ax (UNII Band 7) – Ch. 151, MCS2)**

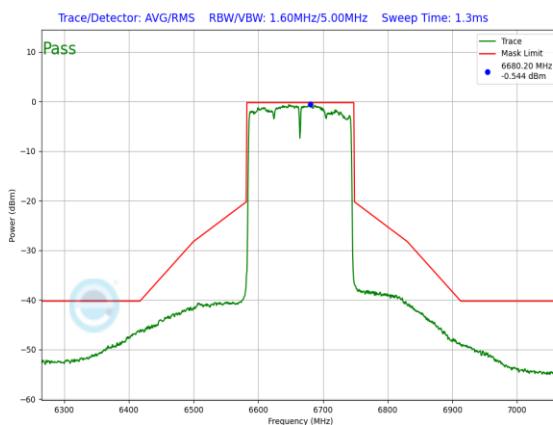


**Plot 7-1136. SP In-Band Emission Plot SDM Diversity Antenna 4a  
(160MHz 802.11ax (UNII Band 7) – Ch. 143, MCS2)**


FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 324 of 510

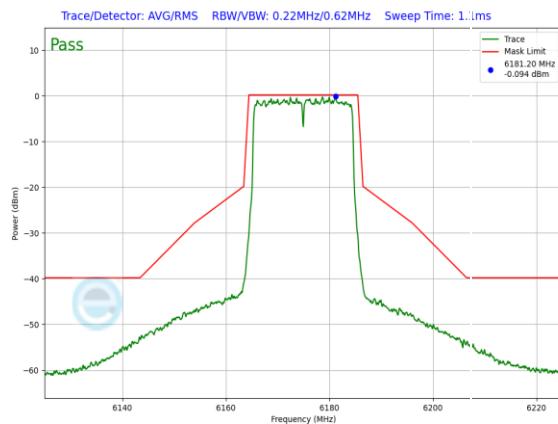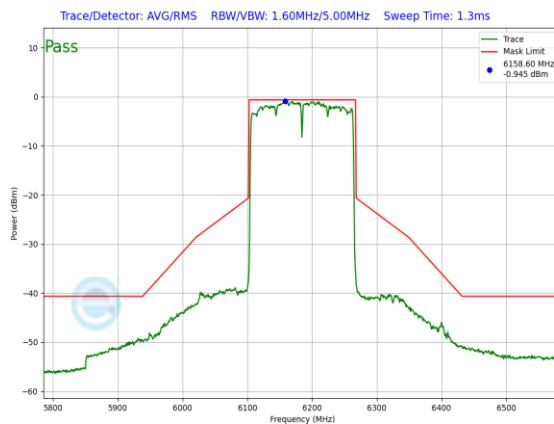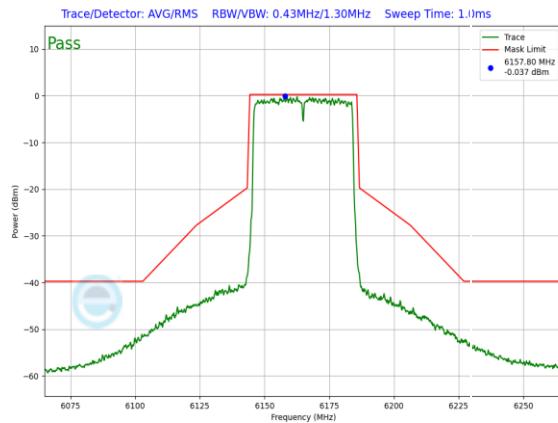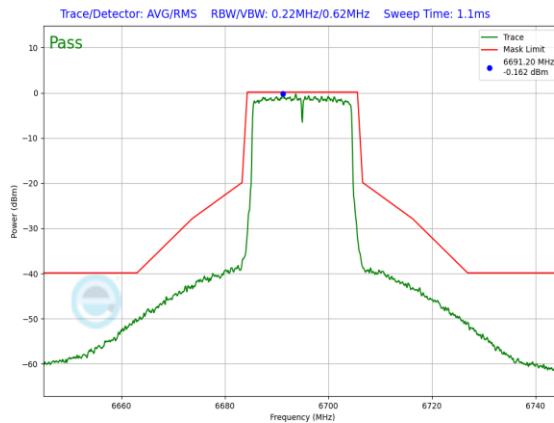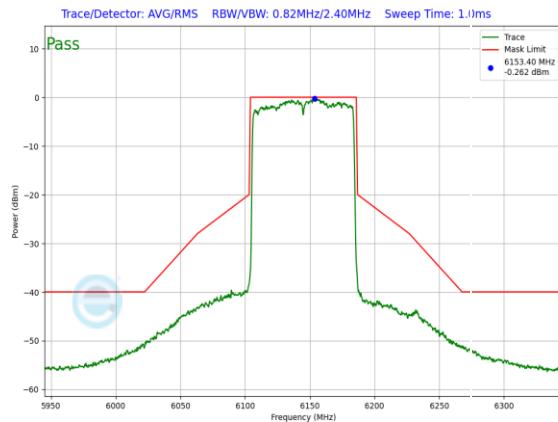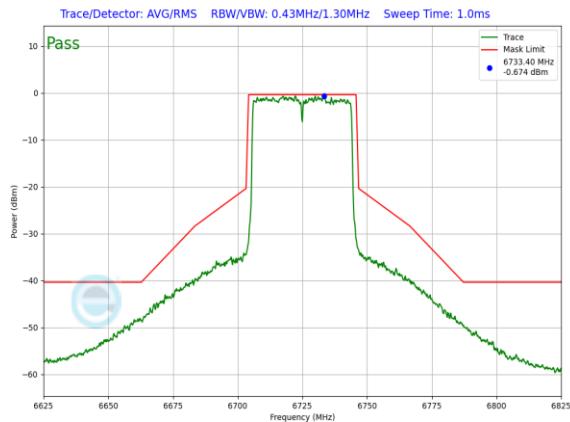**Mid Data Rate**

**Plot 7-1137. SP In-Band Emission Plot SDM Diversity Antenna 4a (20MHz 802.11ax (UNII Band 5) – Ch. 45, MCS4)**

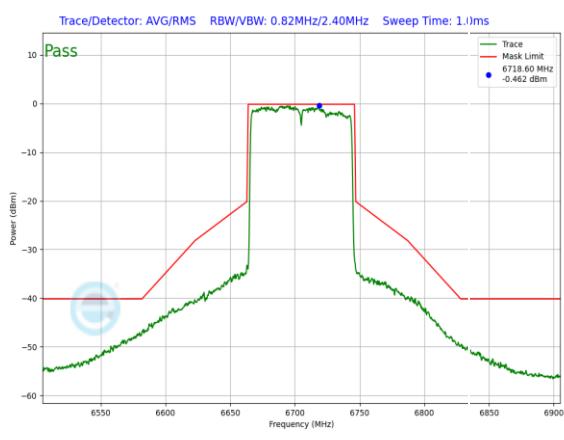**Plot 7-1140. SP In-Band Emission Plot SDM Diversity Antenna 4a (160MHz 802.11ax (UNII Band 5) – Ch. 47, MCS4)**

**Plot 7-1138. SP In-Band Emission Plot SDM Diversity Antenna 4a (40MHz 802.11ax (UNII Band 5) – Ch. 43, MCS4)**

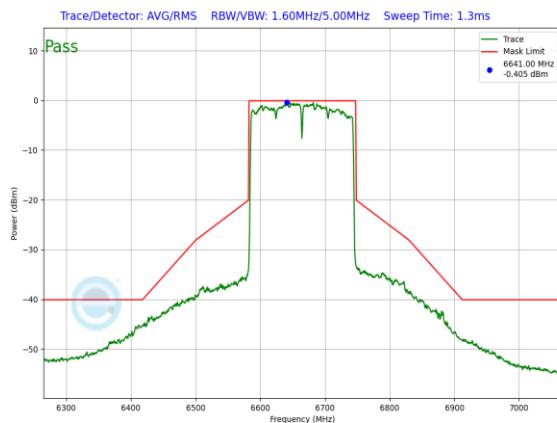**Plot 7-1141. SP In-Band Emission Plot SDM Diversity Antenna 4a (20MHz 802.11ax (UNII Band 7) – Ch. 149, MCS4)**

**Plot 7-1139. SP In-Band Emission Plot SDM Diversity Antenna 4a (80MHz 802.11ax (UNII Band 5) – Ch. 39, MCS4)**

**Plot 7-1142. SP In-Band Emission Plot SDM Diversity Antenna 4a (40MHz 802.11ax (UNII Band 7) – Ch. 155, MCS4)**

FCC ID: BCGA2837 IC: 579C-A2837	 <b>element</b>	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 325 of 510




**Plot 7-1143. SP In-Band Emission Plot SDM Diversity Antenna 4a  
(80MHz 802.11ax (UNII Band 7) – Ch. 143, MCS4)**




**Plot 7-1144. SP In-Band Emission Plot SDM Diversity Antenna 4a  
(160MHz 802.11ax (UNII Band 7) – Ch. 143, MCS4)**


FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 326 of 510

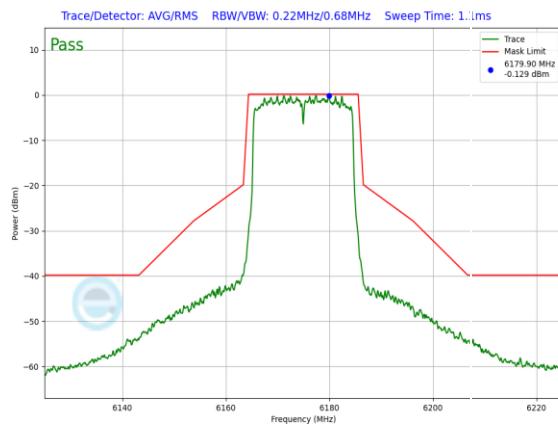**High Data Rate**


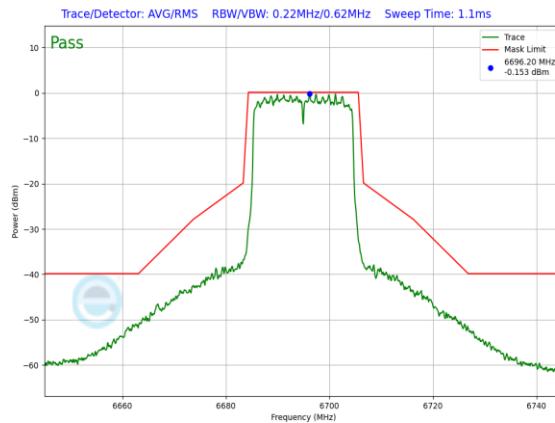
**Plot 7-1145. SP In-Band Emission Plot SDM Diversity Antenna 4a (20MHz 802.11ax (UNII Band 5) – Ch. 45, MCS11)**

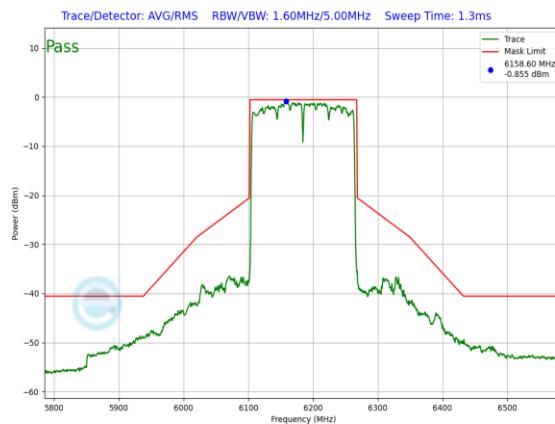


**Plot 7-1148. SP In-Band Emission Plot SDM Diversity Antenna 4a (160MHz 802.11ax (UNII Band 5) – Ch. 47, MCS11)**

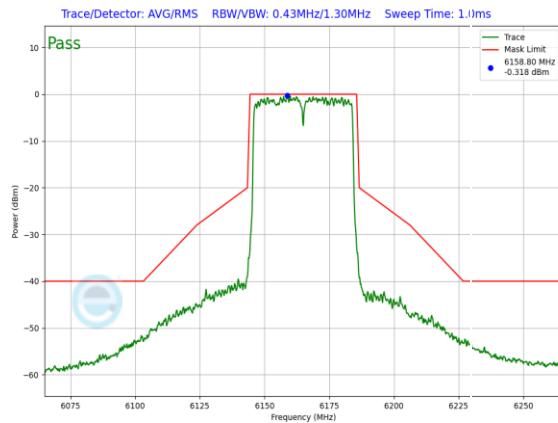


**Plot 7-1146. SP In-Band Emission Plot SDM Diversity Antenna 4a (40MHz 802.11ax (UNII Band 5) – Ch. 43, MCS11)**



**Plot 7-1149. SP In-Band Emission Plot SDM Diversity Antenna 4a (20MHz 802.11ax (UNII Band 7) – Ch. 149, MCS11)**

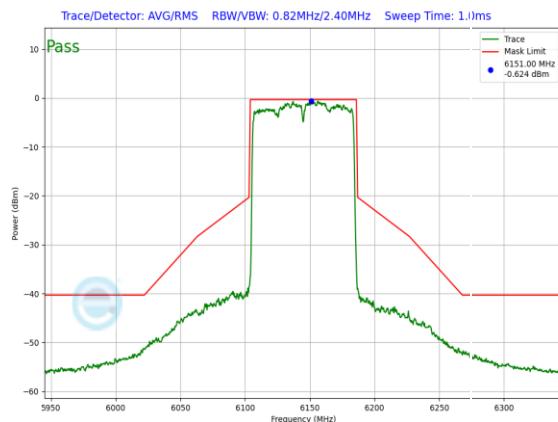


**Plot 7-1147. SP In-Band Emission Plot SDM Diversity Antenna 4a (80MHz 802.11ax (UNII Band 5) – Ch. 39, MCS11)**

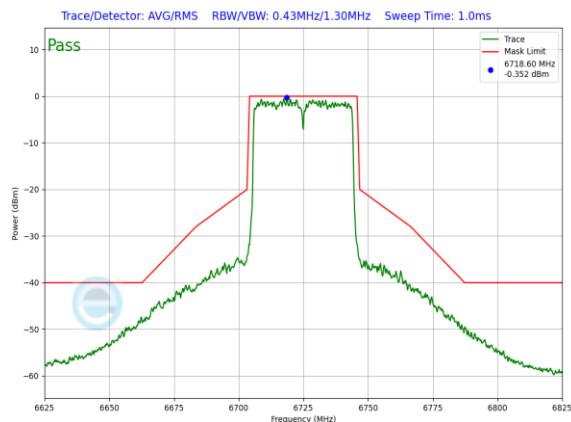

**Plot 7-1150. SP In-Band Emission Plot SDM Diversity Antenna 4a (40MHz 802.11ax (UNII Band 7) – Ch. 155, MCS11)**

FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 327 of 510

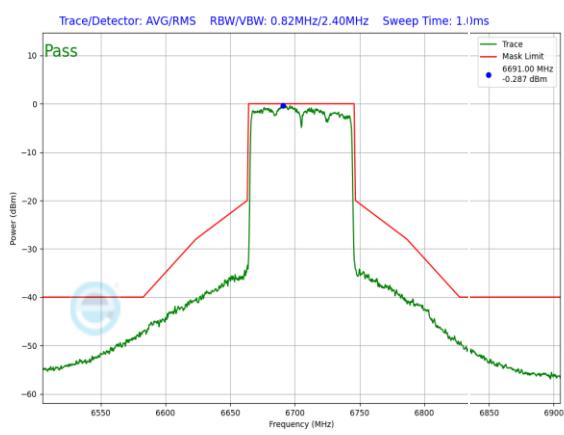

**Plot 7-1151. SP In-Band Emission Plot SDM Diversity Antenna 4a  
(80MHz 802.11ax (UNII Band 7) – Ch. 151, MCS11)**



**Plot 7-1152. SP In-Band Emission Plot SDM Diversity Antenna 4a  
(160MHz 802.11ax (UNII Band 7) – Ch. 143, MCS11)**

FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 328 of 510

## 7.6 Contention Based Protocol – 802.11a/ax(SU)

§15.407(d)(6), RSS-248 [4.7]

### Test Overview and Limit

Indoor access points, subordinate devices and client devices operating in the 5.925-7.125 GHz band (herein referred to as unlicensed devices) are required to use technologies that include a contention-based protocol to avoid co-channel interference with incumbent devices sharing the band. To ensure incumbent co-channel operations are detected in a technology-agnostic manner, unlicensed devices are required to detect co-channel radio frequency energy (energy detect) and avoid simultaneous transmission.

Unlicensed indoor low-power devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel and stay off the channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm). The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain.

To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF energy throughout their intended operating channel.

### Test Procedure Used

ANSI C63.10-2013 – Section 12.3.2.2


KDB 987594 D02 v02r01

### Test Settings

1. Configure the EUT to transmit with a constant duty cycle.
2. Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth
3. Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT.
4. Connect the output port of the EUT to the signal analyzer 2, as shown in Figure 2. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver.
5. Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters set at step two.
6. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
7. Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT as shown in Figure 2.
8. Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer 1.
9. Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
10. Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
11. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 5, choose a different center frequency for the AWGN signal and repeat the process.

FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 329 of 510

## Test Setup

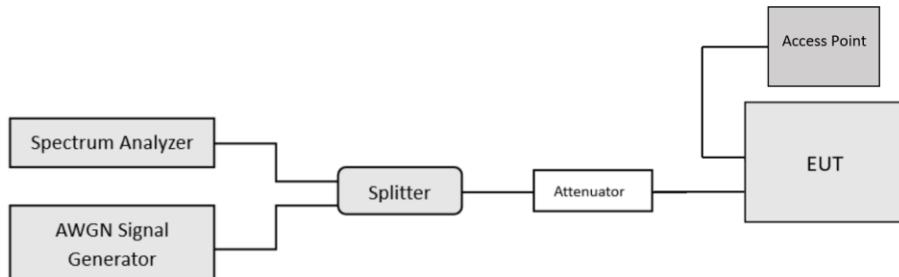

**Figure 7-5. Contention-based protocol test setup, conducted method**

## Test Notes

1. The EUT does not support channel puncturing.
2. Per guidance from KDB 987594 D02 v02r01, contention-based protocol was tested using an AWGN signal with a bandwidth of 10MHz. The amplitude of the signal was increased until detected by the EUT, signaled by the ceasing of transmission, marker indicates the point at which the AWGN signal is introduced.
3. Per KDB 987594 D04 v02, contention-based protocol was tested with receiver with the lowest antenna gain.
4. 15 trials were ran in order to assure that at least 90% of certainty was met.

Detection Level = Injected AWGN Power (dBm) – Antenna Gain (dBi) + Path Loss (dB)

**Equation 7-1. Incumbent Detection Level Calculation**

FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 330 of 510

Band	Channel	Channel Frequency [MHz]	Channel BW [MHz]	Incumbent Frequency [MHz]	Injected (AWGN) [dBm]	Antenna Gain [dBi]	Adjusted Power Level [dBm]	Detection Limit [dBm]	Margin [dB]
UNII Band 5	53	6215	20	6215	-67.10	-2.20	-67.50	-62.0	-5.50
	47	6185	160	6110	-65.10	-2.20	-65.50	-62.0	-3.50
				6185	-65.30	-2.20	-65.70	-62.0	-3.70
				6260	-65.30	-2.20	-65.70	-62.0	-3.70
UNII Band 6	101	6455	20	6455	-66.71	-2.20	-67.11	-62.0	-5.11
	111	6505	160	6430	-65.73	-2.20	-66.13	-62.0	-4.13
				6505	-64.99	-2.20	-65.39	-62.0	-3.39
				6580	-65.05	-2.20	-65.45	-62.0	-3.45
UNII Band 7	149	6695	20	6695	-66.63	-2.20	-67.03	-62.0	-5.03
	143	6665	160	6590	-65.10	-2.20	-65.50	-62.0	-3.50
				6665	-64.89	-2.20	-65.29	-62.0	-3.29
				6740	-64.60	-2.20	-65.00	-62.0	-3.00
UNII Band 8	197	6935	20	6935	-66.89	-2.20	-67.29	-62.0	-5.29
	207	6985	160	6910	-65.22	-2.20	-65.62	-62.0	-3.62
				6985	-65.30	-2.20	-65.70	-62.0	-3.70
				7060	-64.65	-2.20	-65.05	-62.0	-3.05

**Table 7-161. Contention Based Protocol – Incumbent Detection Results**

FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 331 of 510



Band	Channel	Channel Frequency [MHz]	Channel BW [MHz]	Incumbent Frequency [MHz]	EUT Transmission Status		
					Adjusted AWGN Power (dBm)		
					Normal	Minimal	Ceased
UNII Band 5	53	6215	20	6215	-78.61	-68.75	-67.50
	47	6185	160	6110	-76.61	-66.75	-65.50
				6185	-76.81	-66.95	-65.70
				6260	-76.81	-66.95	-65.70
UNII Band 6	101	6455	20	6455	-78.22	-68.36	-67.11
	111	6505	160	6430	-77.24	-67.38	-66.13
				6505	-76.50	-66.64	-65.39
				6580	-76.56	-66.62	-65.45
UNII Band 7	149	6695	20	6695	-78.14	-66.68	-67.03
	175	6665	160	6750	-76.61	-68.26	-65.50
				6825	-76.27	-66.73	-65.29
				6900	-75.98	-66.52	-65.00
UNII Band 8	197	6935	20	6935	-78.27	-66.23	-67.29
	207	6985	160	6910	-76.60	-68.52	-65.62
				6985	-76.68	-66.85	-65.70
				7060	-76.03	-66.93	-65.05

**Table 7-162. Contention Based Protocol – Detection Results – All Tx Cases**


CBP Detection (1 = Detection, Blank = No Detection)																				
Band	Channel	Channel Frequency [MHz]	Channel BW [MHz]	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	Limit [%]	Pass/Fail
UNII Band 5	53	6215	20	1	1	1	1	1	1	1	1	1	1	1	1	1	1	90	Pass	
	47	6185	160	1	1	1	1	1	1	1	1	1	1	1	1	1	1	90	Pass	
				1	1	1	1	1	1	1	1	1	1	1	1	1	1	90	Pass	
				1	1	1	1	1	1	1	1	1	1	1	1	1	1	90	Pass	
UNII Band 6	101	6455	20	1	1	1	1	1	1	1	1	1	1	1	1	1	1	90	Pass	
	111	6505	160	1	1	1	1	1	1	1	1	1	1	1	1	1	1	90	Pass	
				1	1	1	1	1	1	1	1	1	1	1	1	1	1	90	Pass	
				1	1	1	1	1	1	1	1	1	1	1	1	1	1	90	Pass	
UNII Band 7	149	6695	20	1	1	1	1	1	1	1	1	1	1	1	1	1	1	90	Pass	
	175	6665	160	1	1	1	1	1	1	1	1	1	1	1	1	1	1	90	Pass	
				1	1	1	1	1	1	1	1	1	1	1	1	1	1	90	Pass	
				1	1	1	1	1	1	1	1	1	1	1	1	1	1	90	Pass	
UNII Band 8	197	6935	20	1	1	1	1	1	1	1	1	1	1	1	1	1	1	90	Pass	
	207	6985	160	1	1	1	1	1	1	1	1	1	1	1	1	1	1	90	Pass	
				1	1	1	1	1	1	1	1	1	1	1	1	1	1	90	Pass	
				1	1	1	1	1	1	1	1	1	1	1	1	1	1	90	Pass	

**Table 7-163. Contention Based Protocol – Incumbent Detection Trial Results**


FCC ID: BCGA2837	IC: 579C-A2837	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 332 of 510	

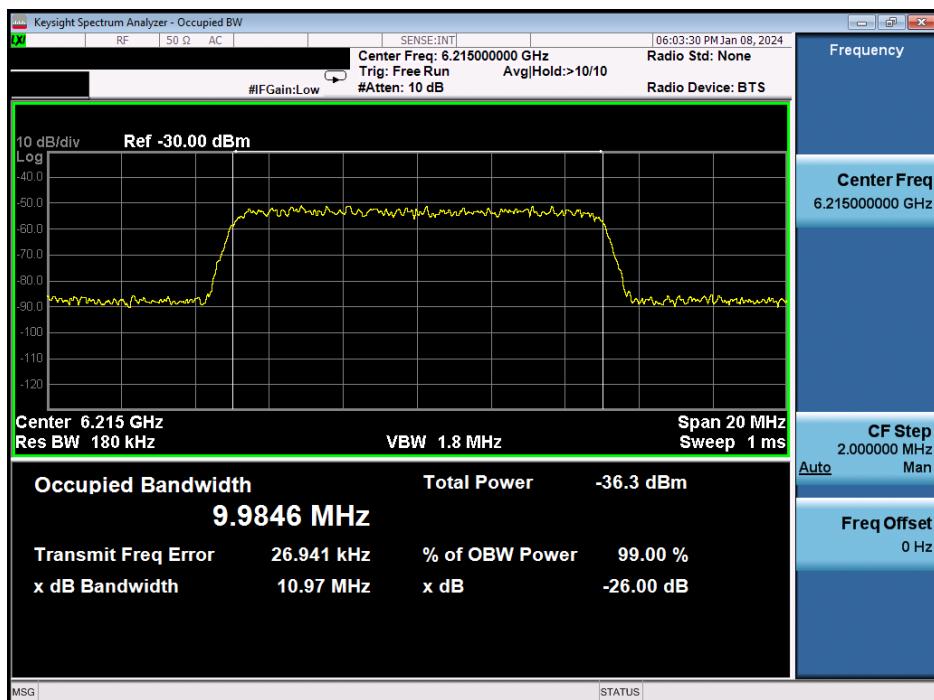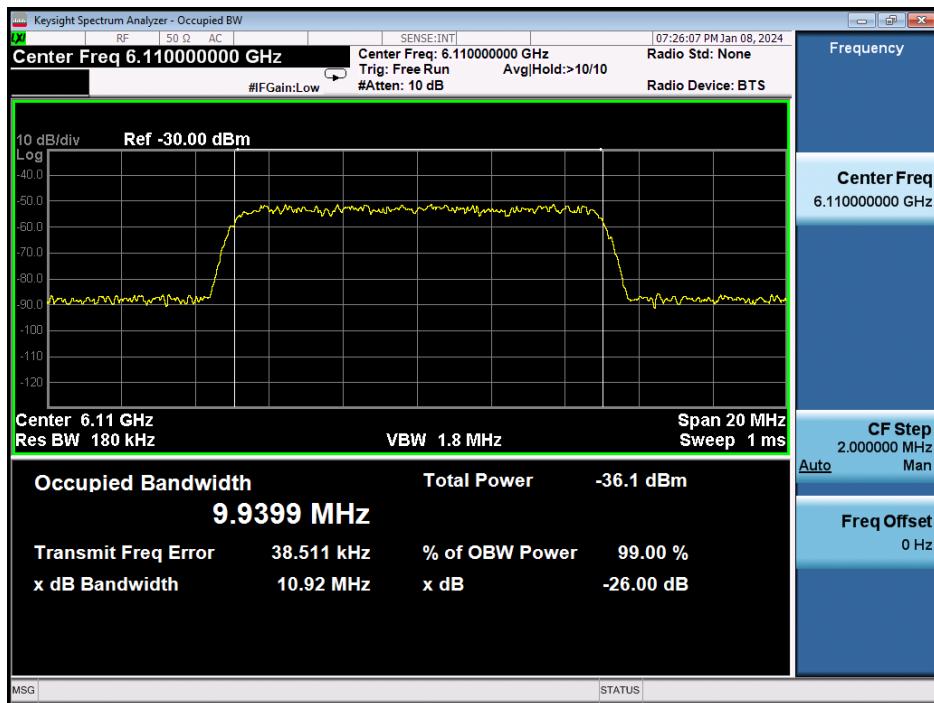**AWGN Plots**

**Plot 7-1153. AWGN Signal – UNII 5 – 20MHz**

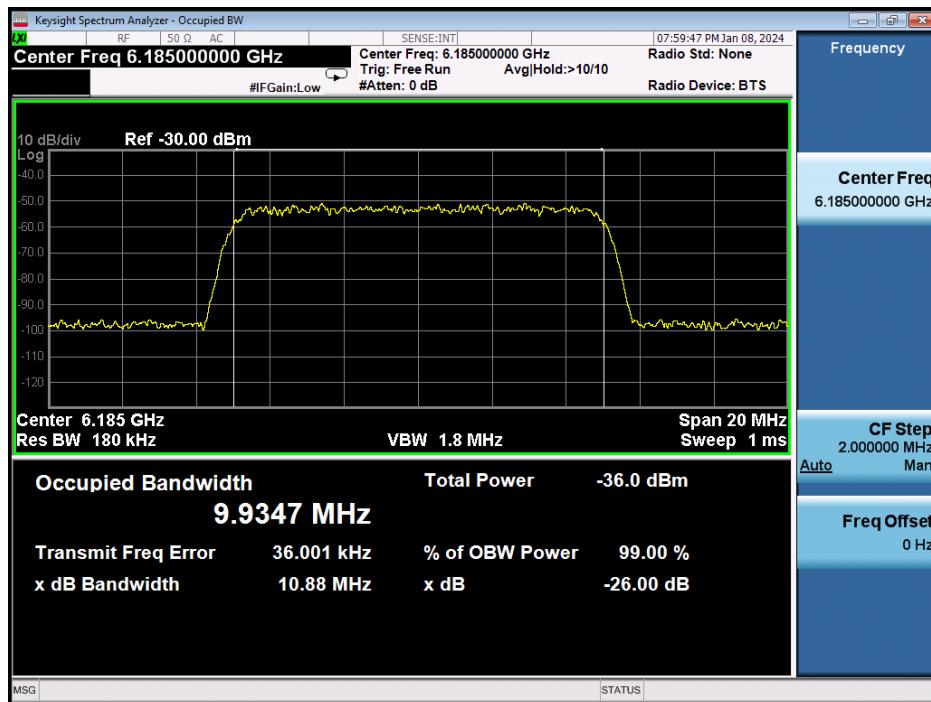**Plot 7-1154. AWGN Signal – UNII 5 – 160MHz - Low**

FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 333 of 510

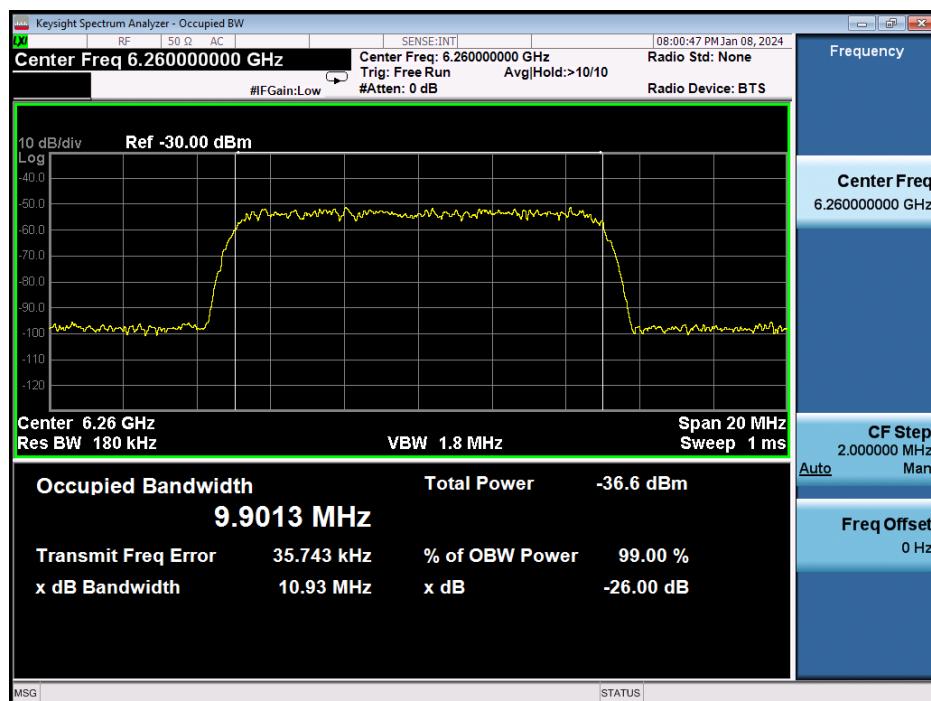


Plot 7-1155. AWGN Signal – UNII 5 – 160MHz – Mid




Plot 7-1156. AWGN Signal – UNII 5 – 160MHz - High

FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 334 of 510

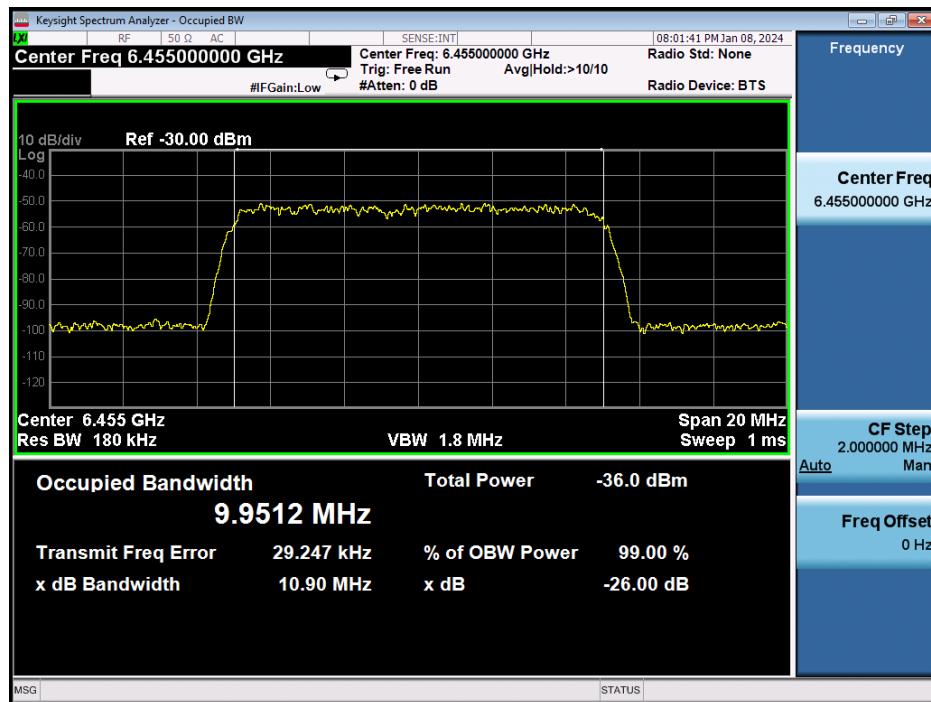


Plot 7-1157. AWGN Signal – UNII 6 – 20MHz

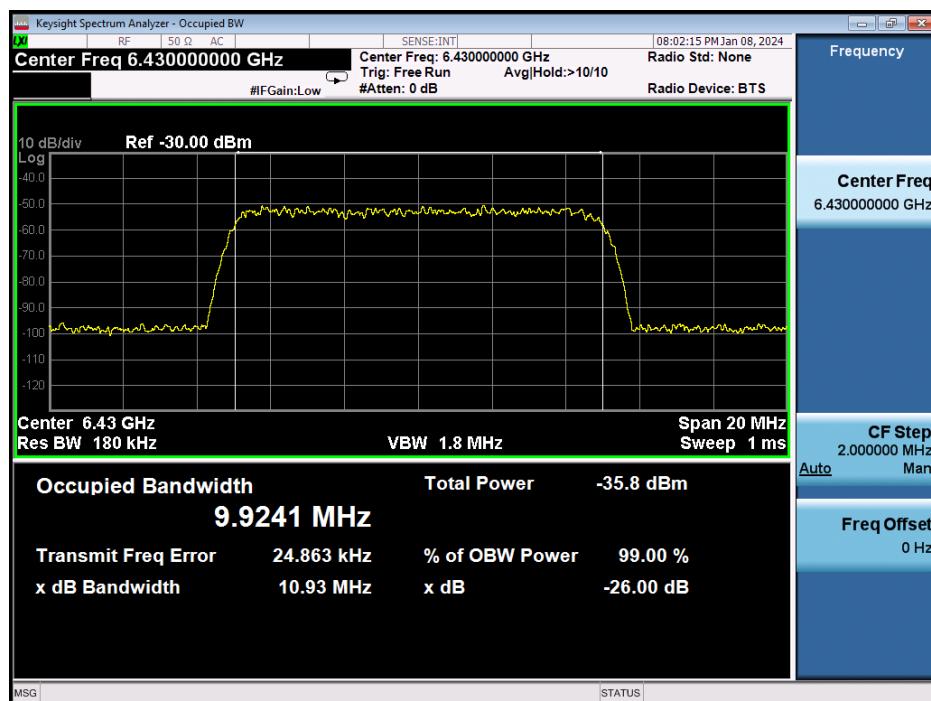


Plot 7-1158. AWGN Signal – UNII 6 – 160MHz - Low

FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 335 of 510

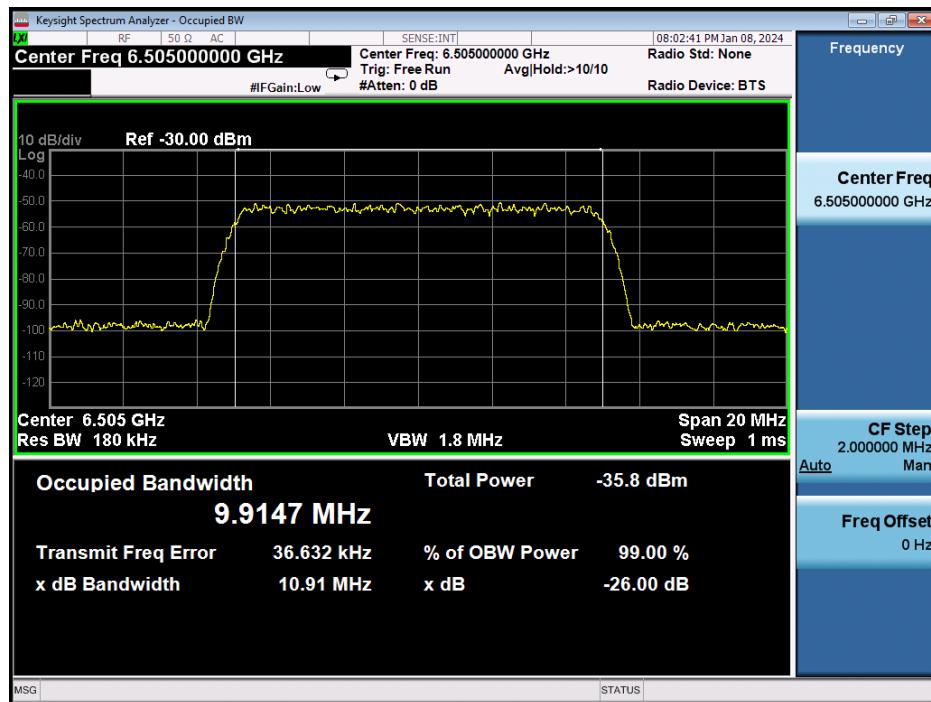


Plot 7-1159. AWGN Signal – UNII 6 – 160MHz – Mid

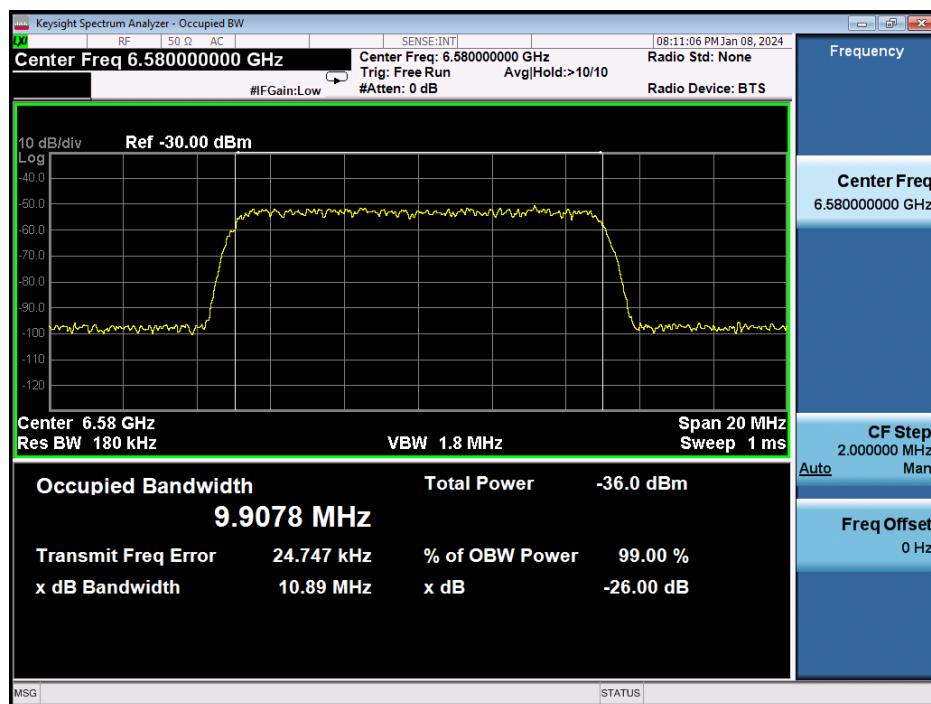


Plot 7-1160. AWGN Signal – UNII 6 – 160MHz - High

FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 336 of 510

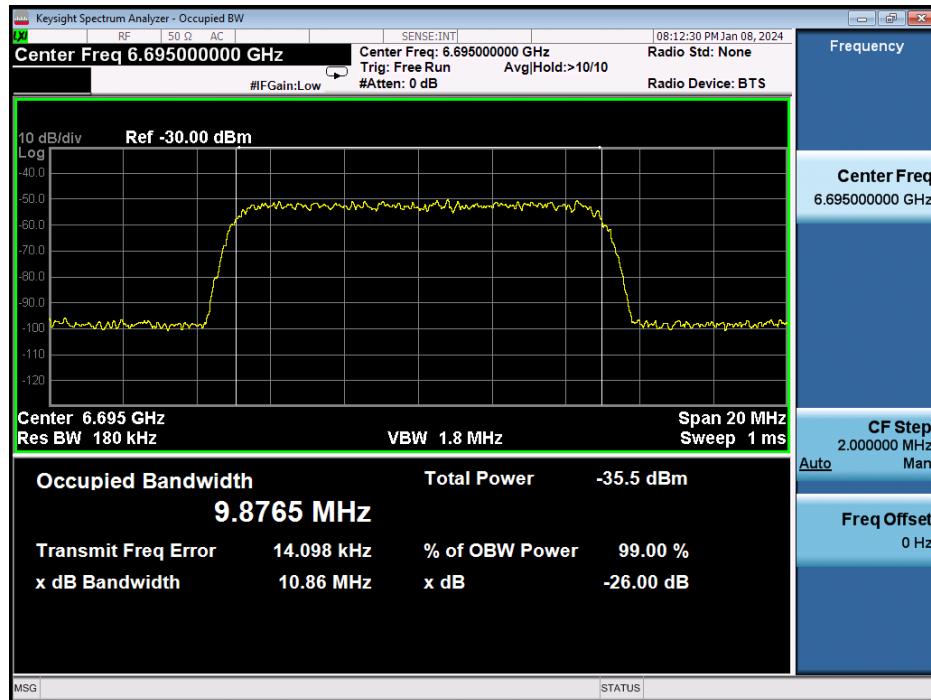


Plot 7-1161. AWGN Signal – UNII 7 – 20MHz

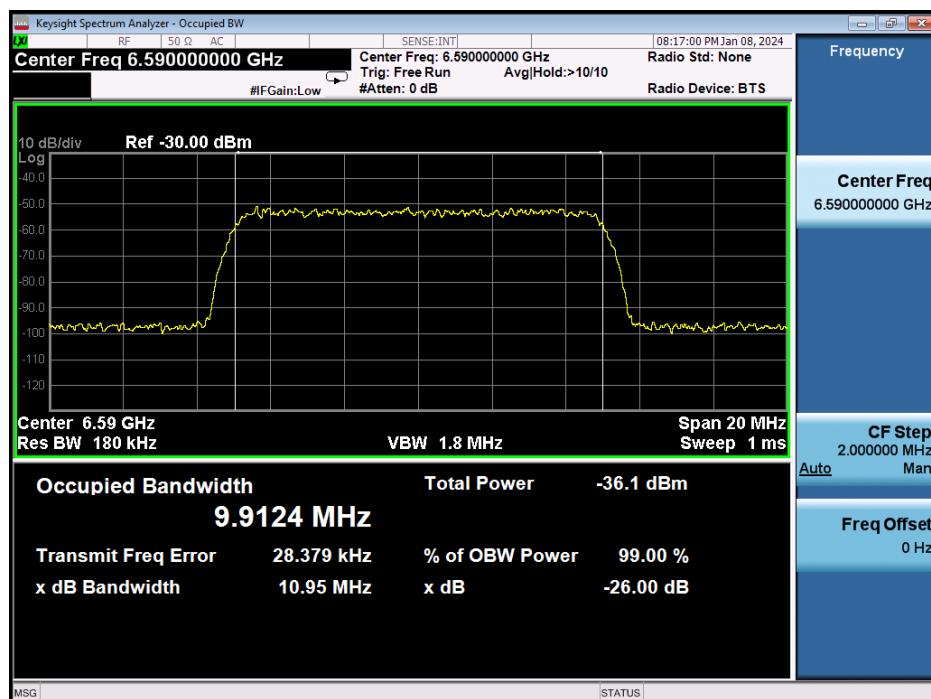


Plot 7-1162. AWGN Signal – UNII 7 – 160MHz - Low

FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 337 of 510


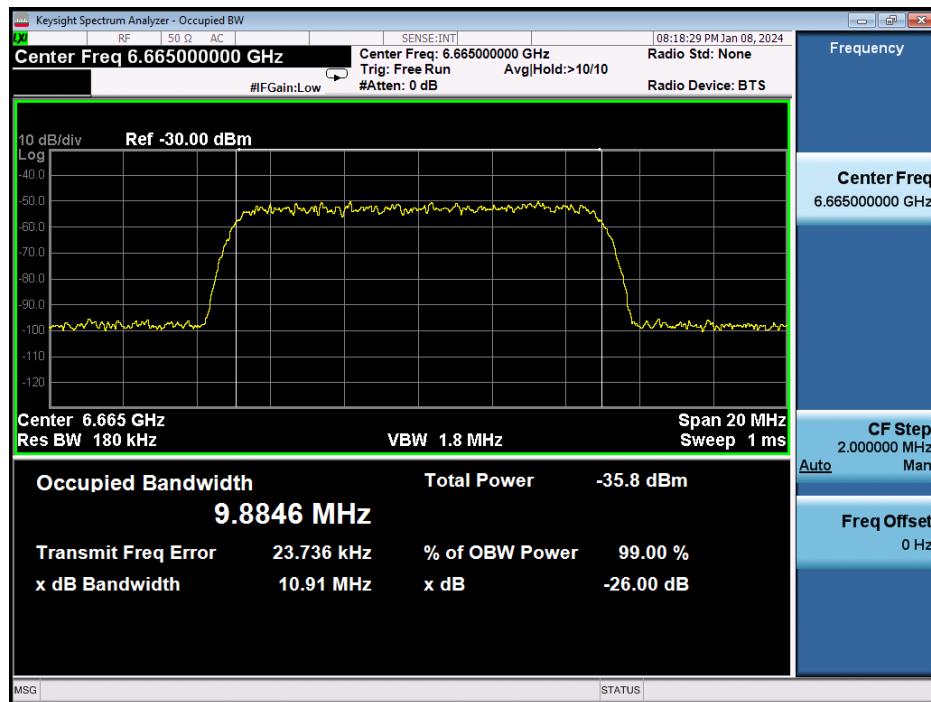


Plot 7-1163. AWGN Signal – UNII 7 – 160MHz – Mid

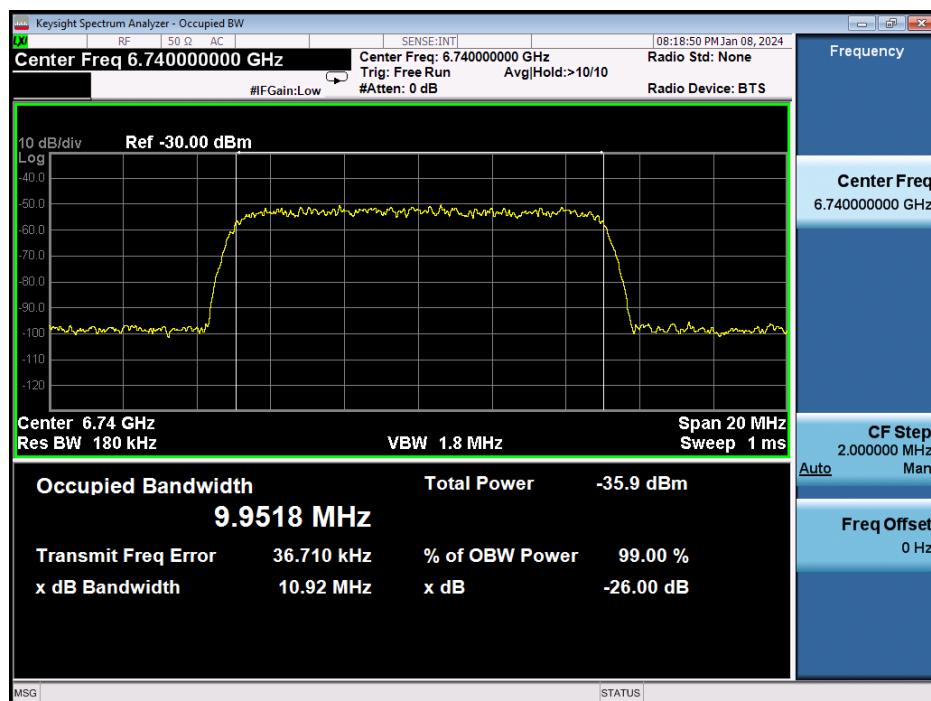


Plot 7-1164. AWGN Signal – UNII 7 – 160MHz - High


FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 338 of 510

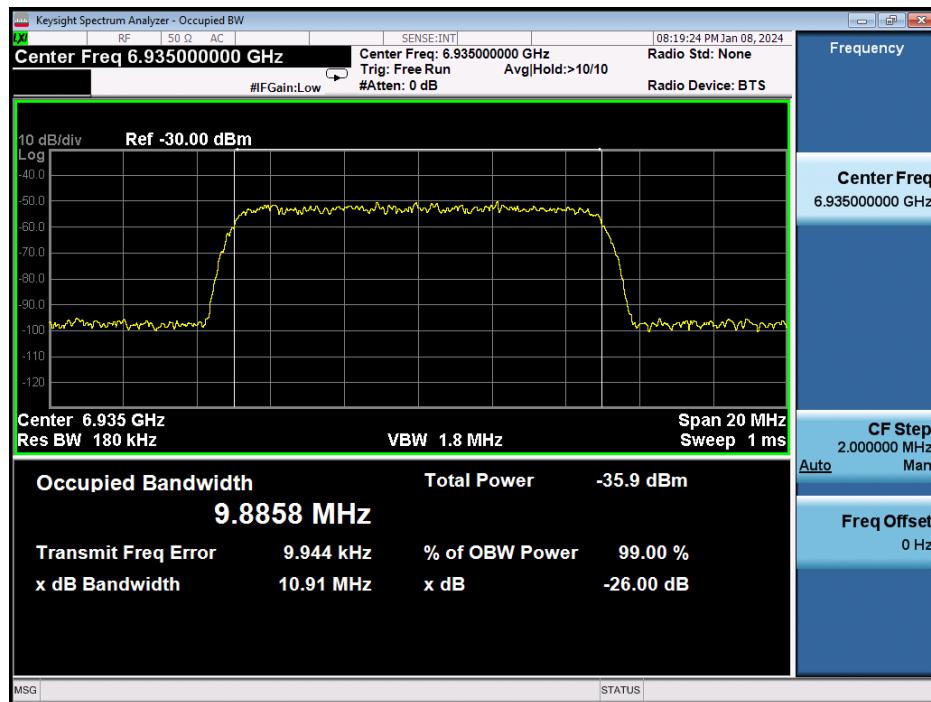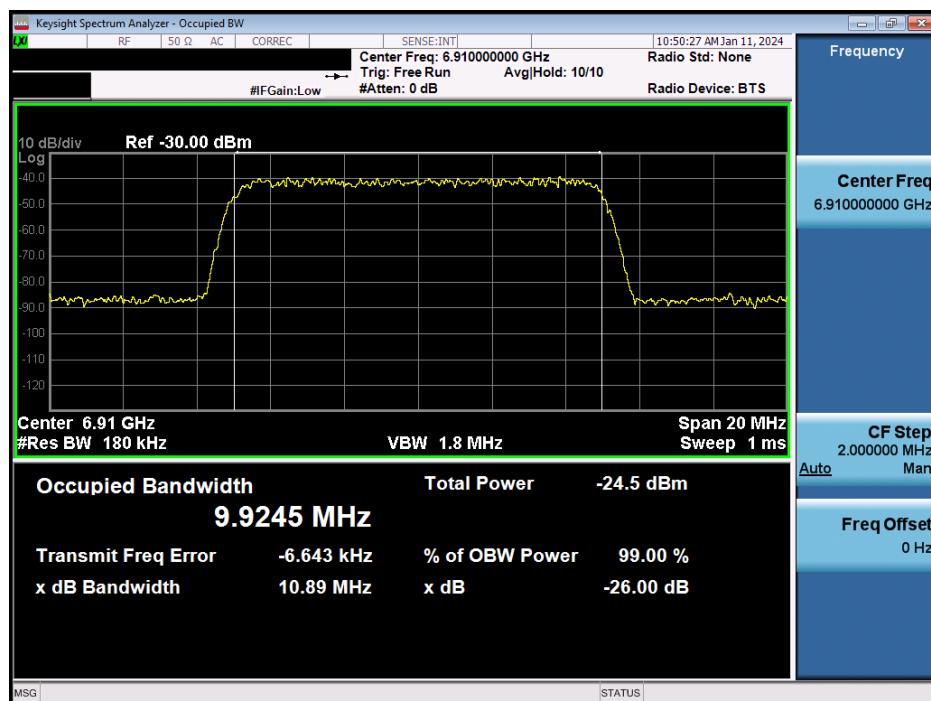
**Plot 7-1165. AWGN Signal – UNII 8 – 20MHz**

**Plot 7-1166. AWGN Signal – UNII 8 – 160MHz - Low**

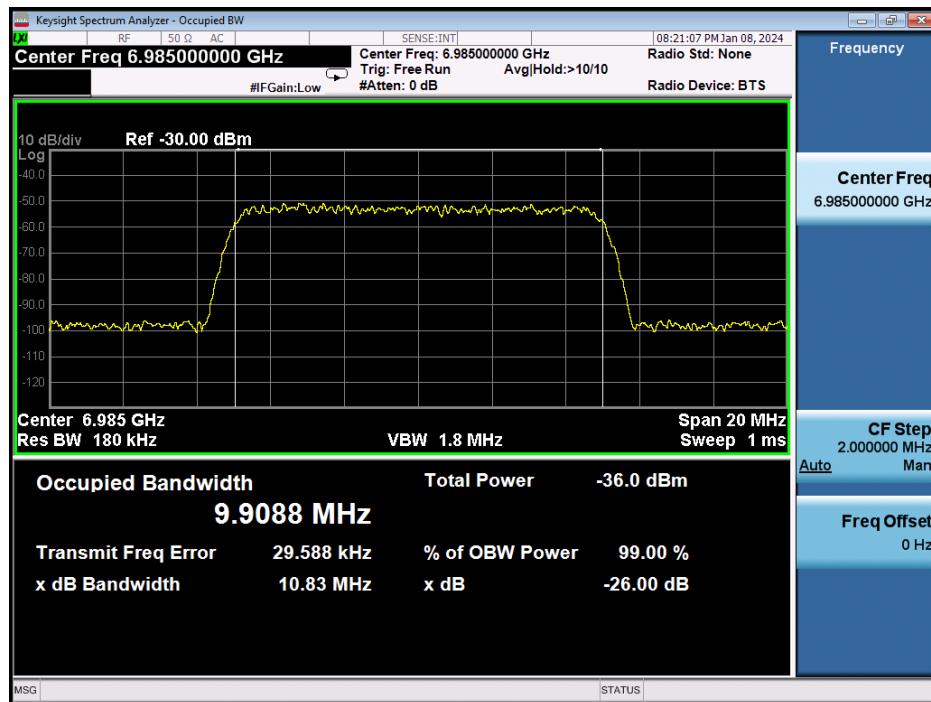FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 339 of 510

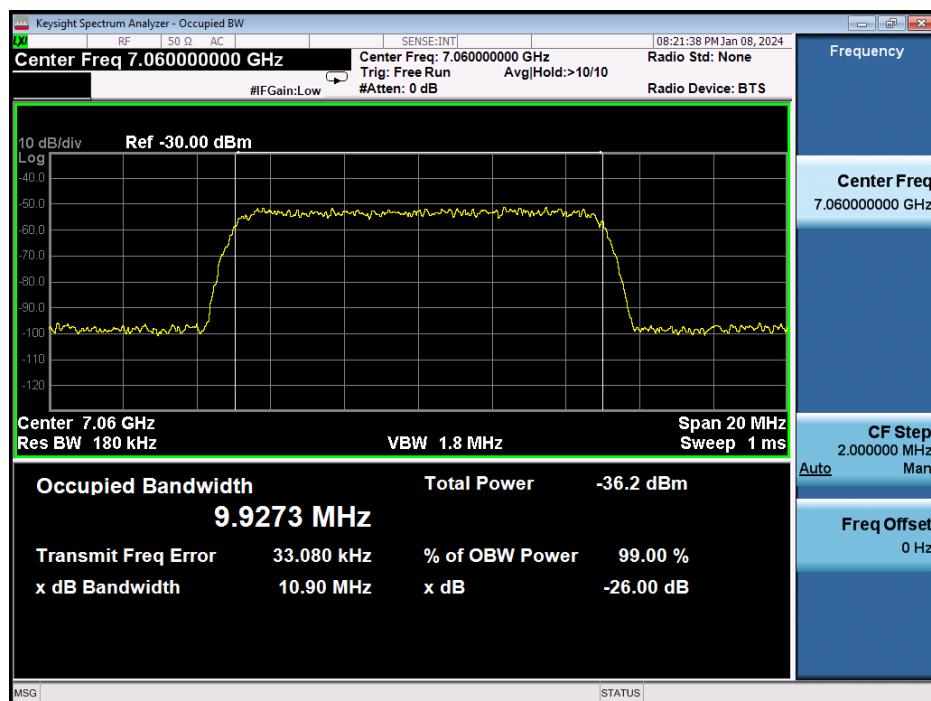


Plot 7-1167. AWGN Signal – UNII 8 – 160MHz – Mid




Plot 7-1168. AWGN Signal – UNII 8 – 160MHz - High

FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 340 of 510

## Contention-Based Protocol Timing Plots

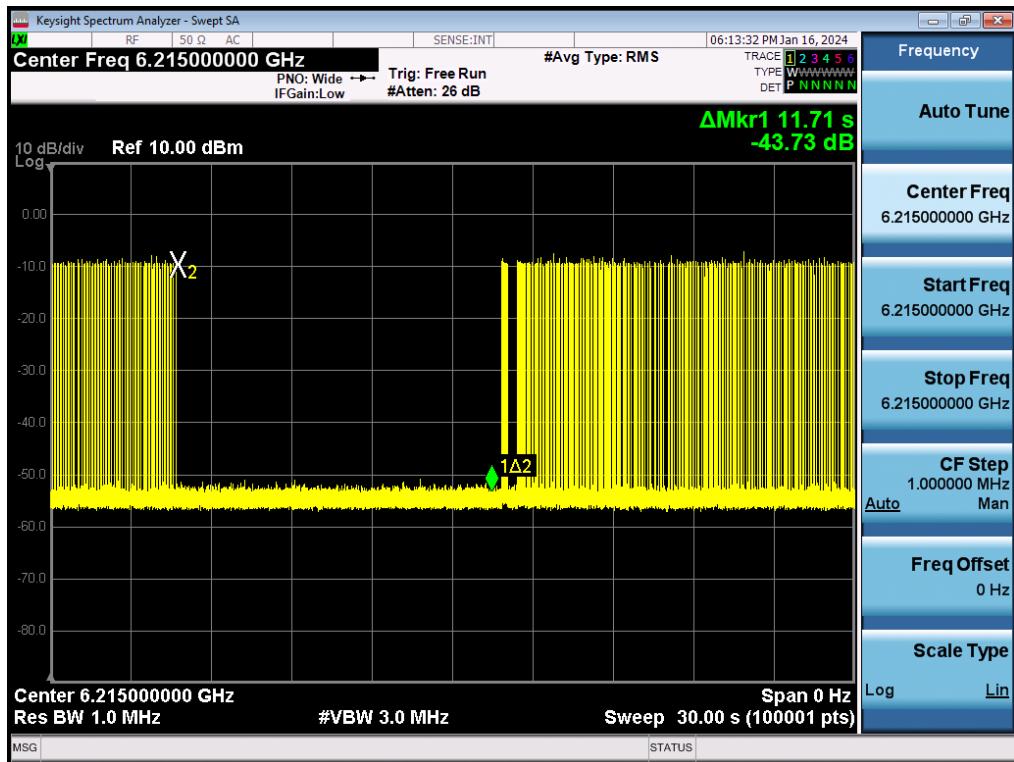


Plot 7-1169. Contention Based Protocol Timing Plot – UNII 5 – 20MHz Channel 53

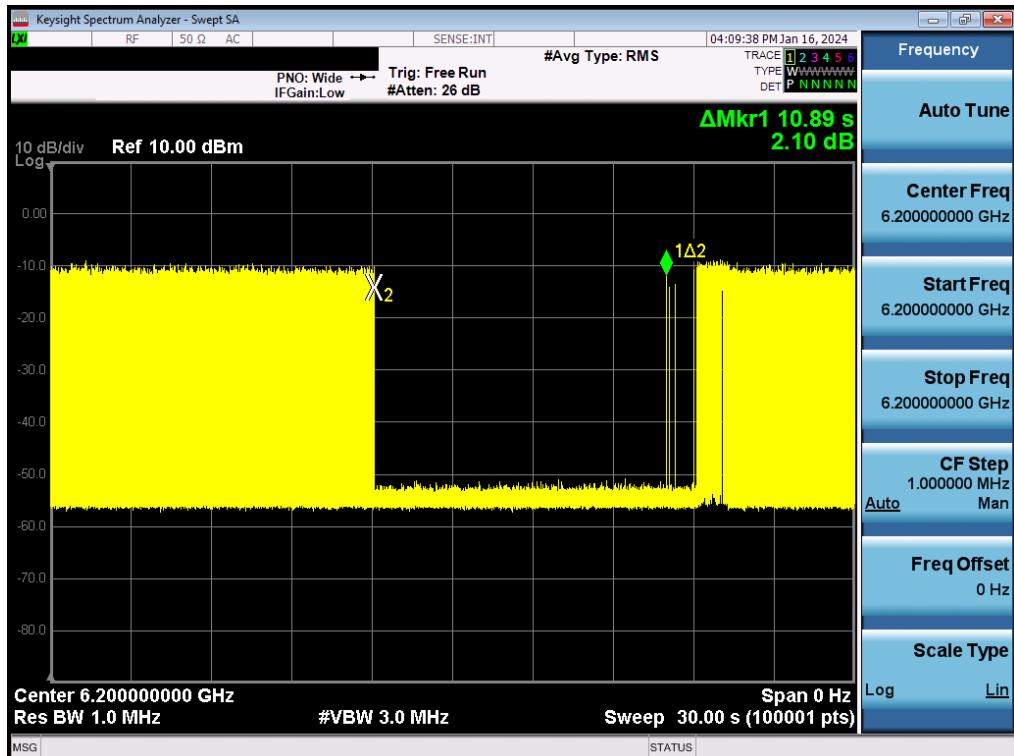


Plot 7-1170. Contention Based Protocol Timing Plot – UNII 5 – 160MHz Channel 47 – Low

FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 341 of 510

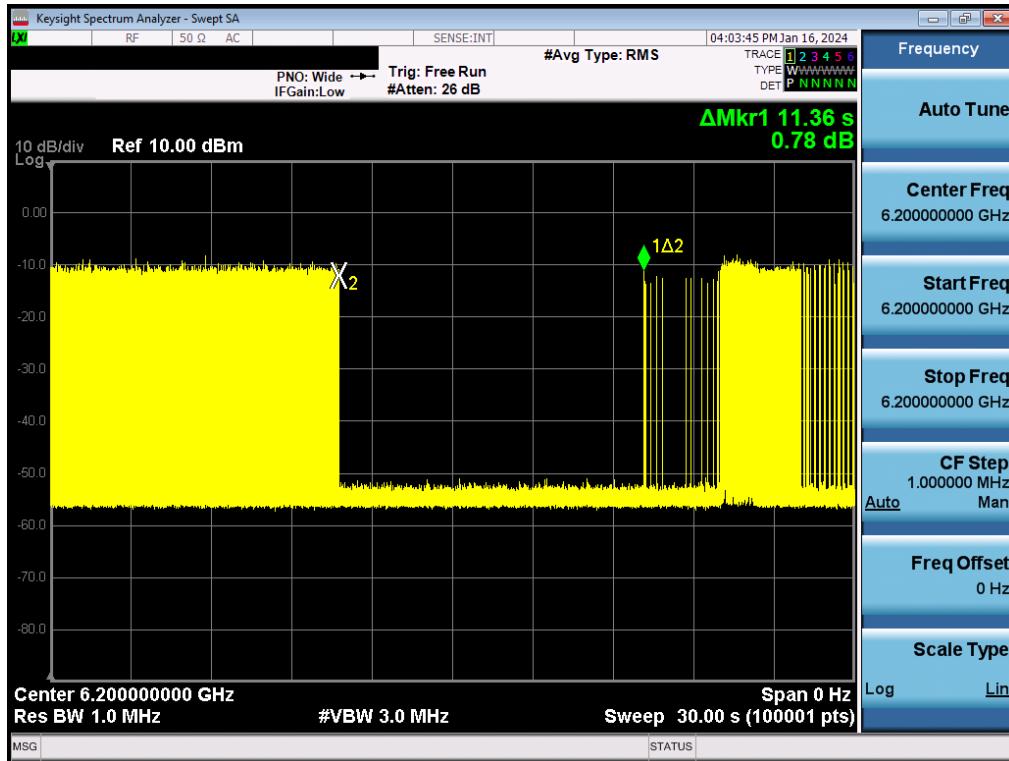


Plot 7-1171. Contention Based Protocol Timing Plot – UNII 5 – 160MHz Channel 47 – Mid

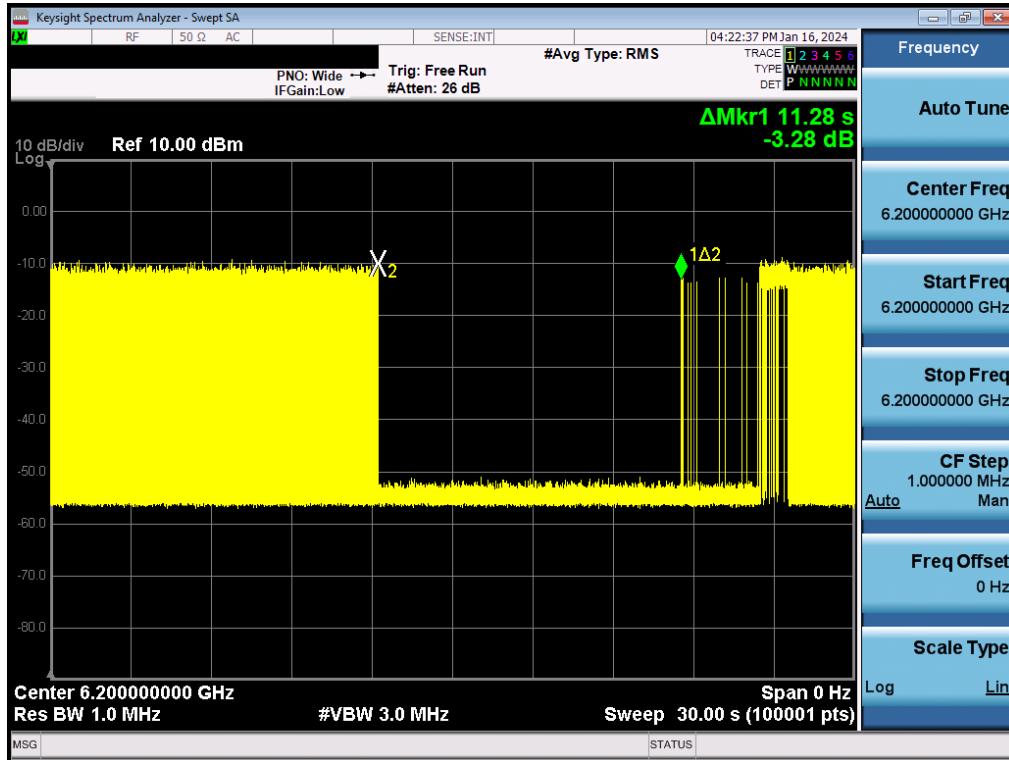


Plot 7-1172. Contention Based Protocol Timing Plot – UNII 5 – 160MHz Channel 47 – High

FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 342 of 510

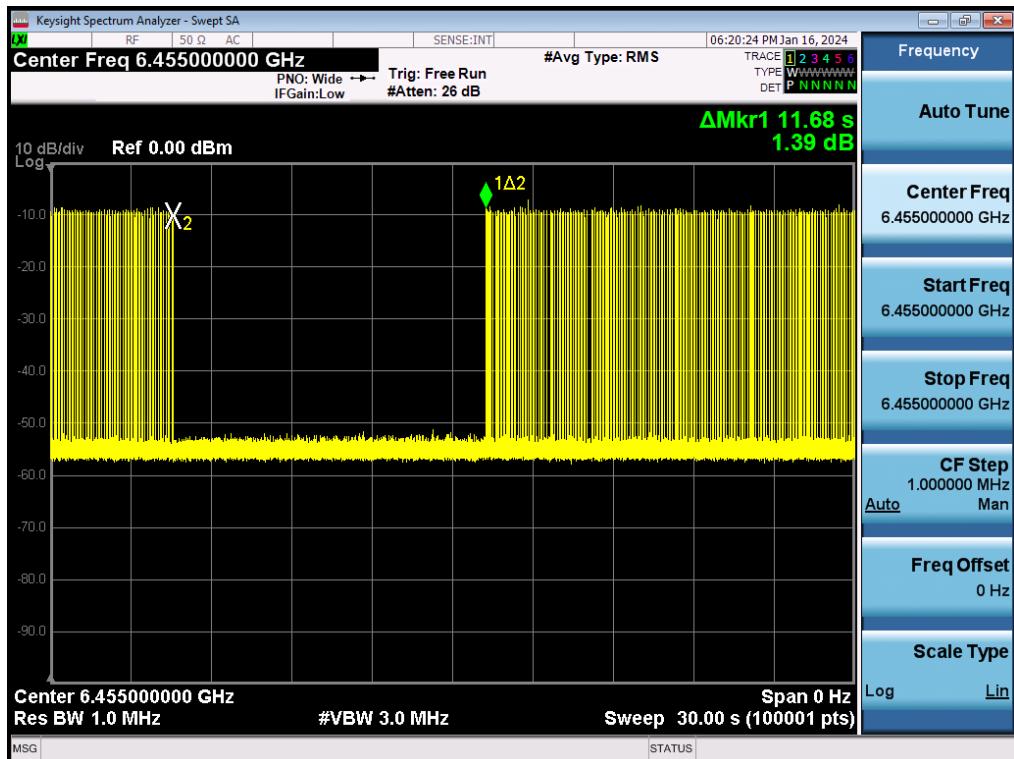


Plot 7-1173. Contention Based Protocol Timing Plot – UNII 6 – 20MHz Channel 101

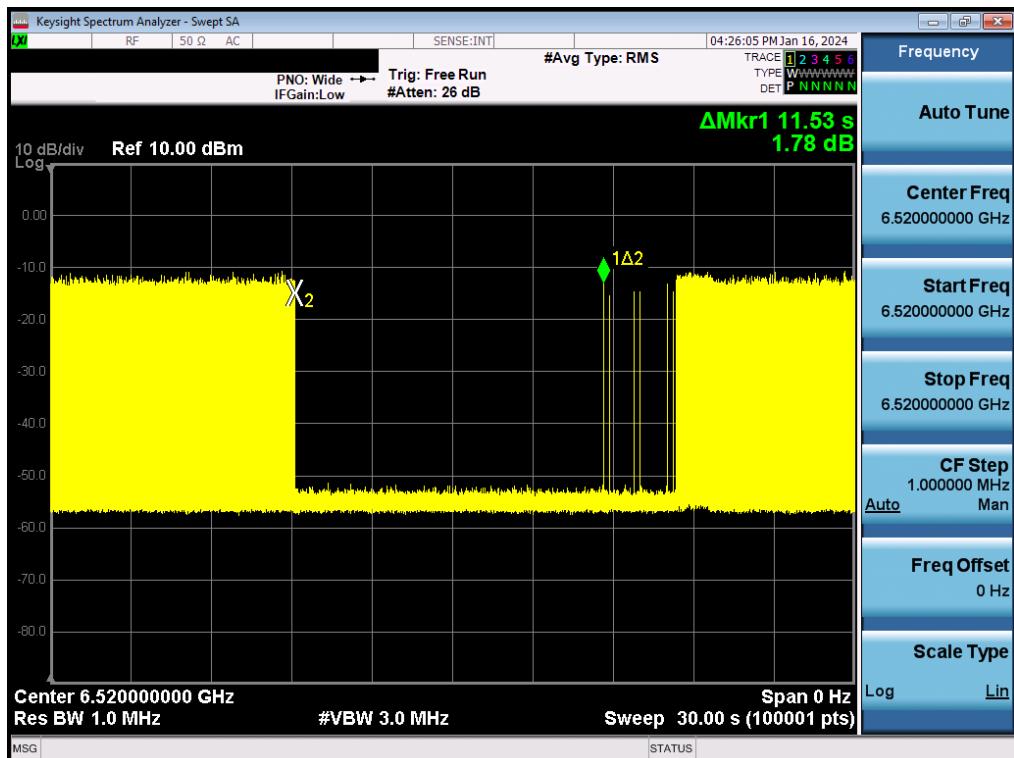


**Plot 7-1174. Contention Based Protocol Timing Plot – UNII 6 – 160MHz Channel 111 – Low**

FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 343 of 510

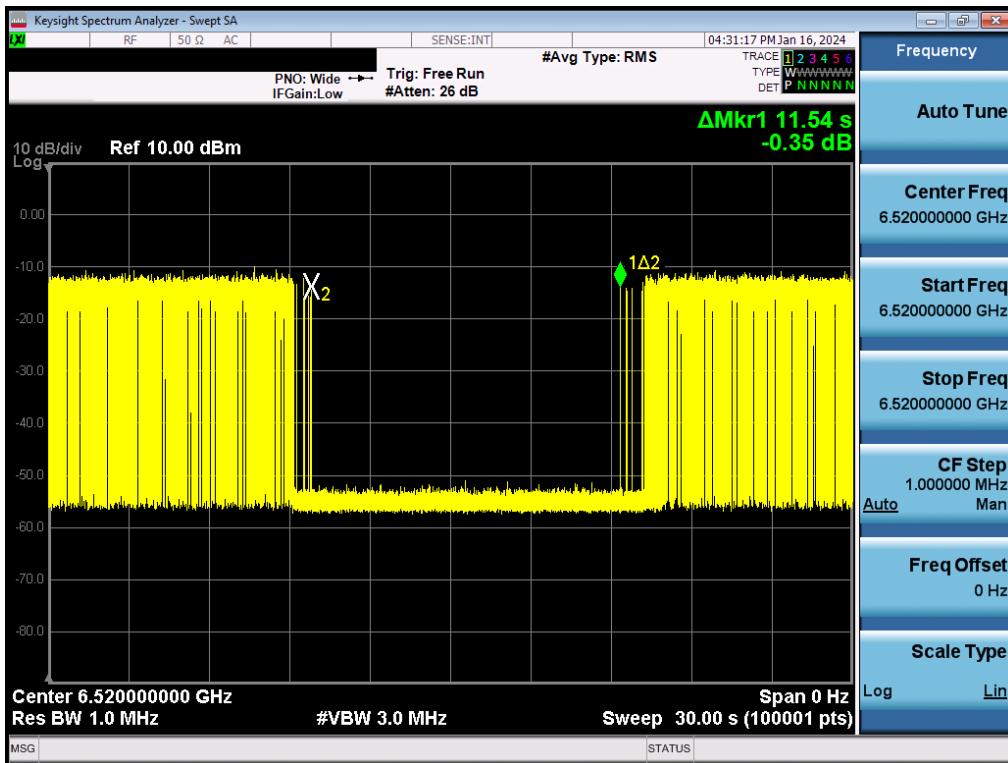


Plot 7-1175. Contention Based Protocol Timing Plot – UNII 6 – 160MHz Channel 111 – Mid

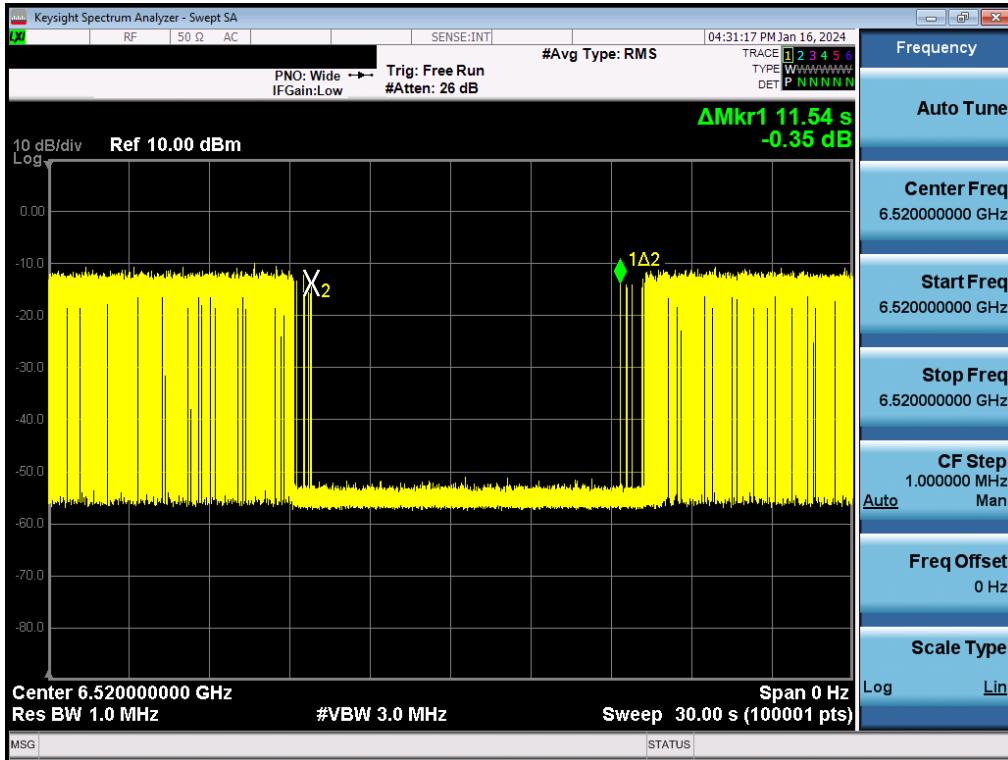


Plot 7-1176. Contention Based Protocol Timing Plot – UNII 6 – 160MHz Channel 111 – High

FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 344 of 510

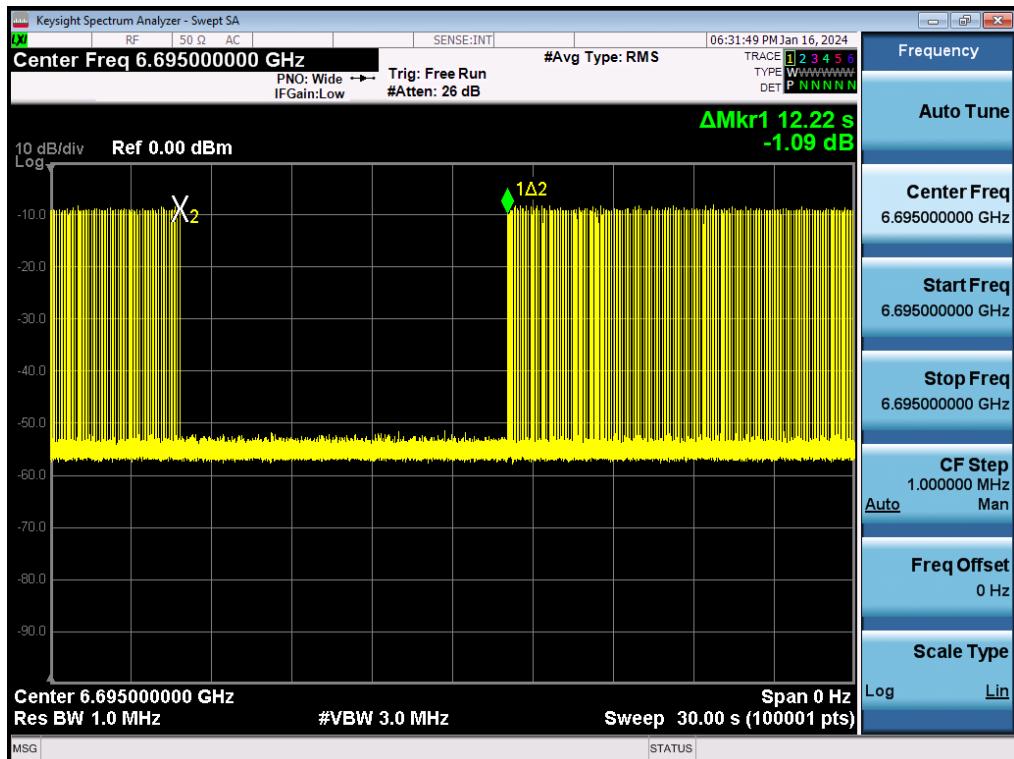


Plot 7-1177. Contention Based Protocol Timing Plot – UNII 7 – 20MHz Channel 149

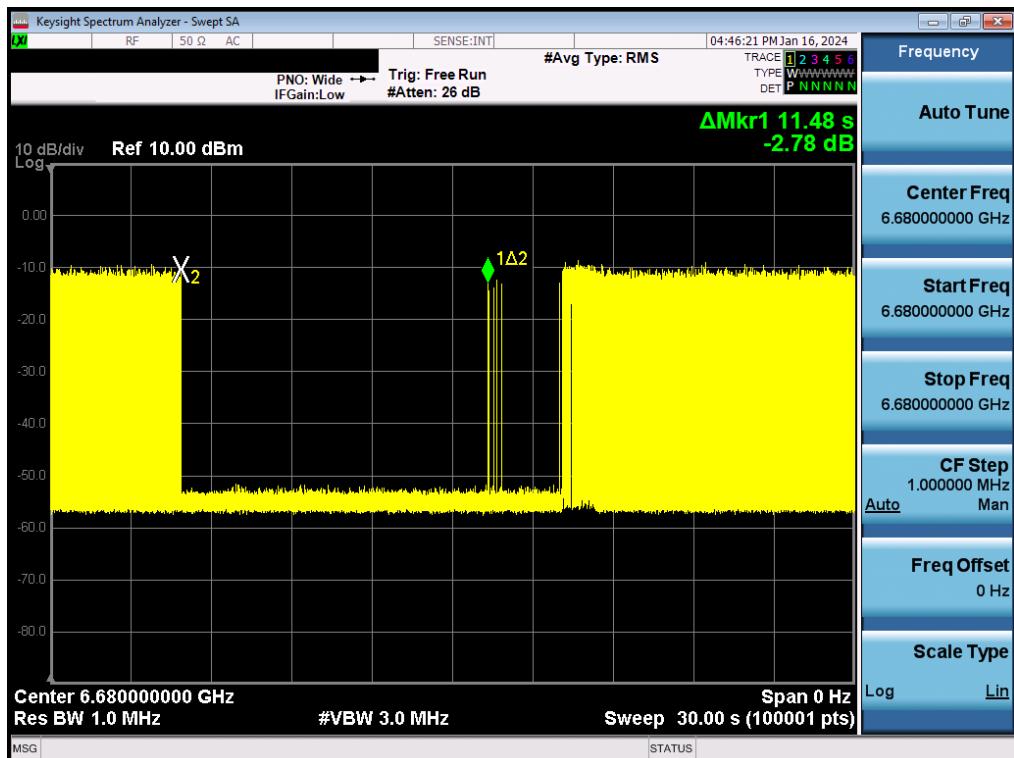


**Plot 7-1178. Contention Based Protocol Timing Plot – UNII 7 – 160MHz Channel 143 – Low**

FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 345 of 510


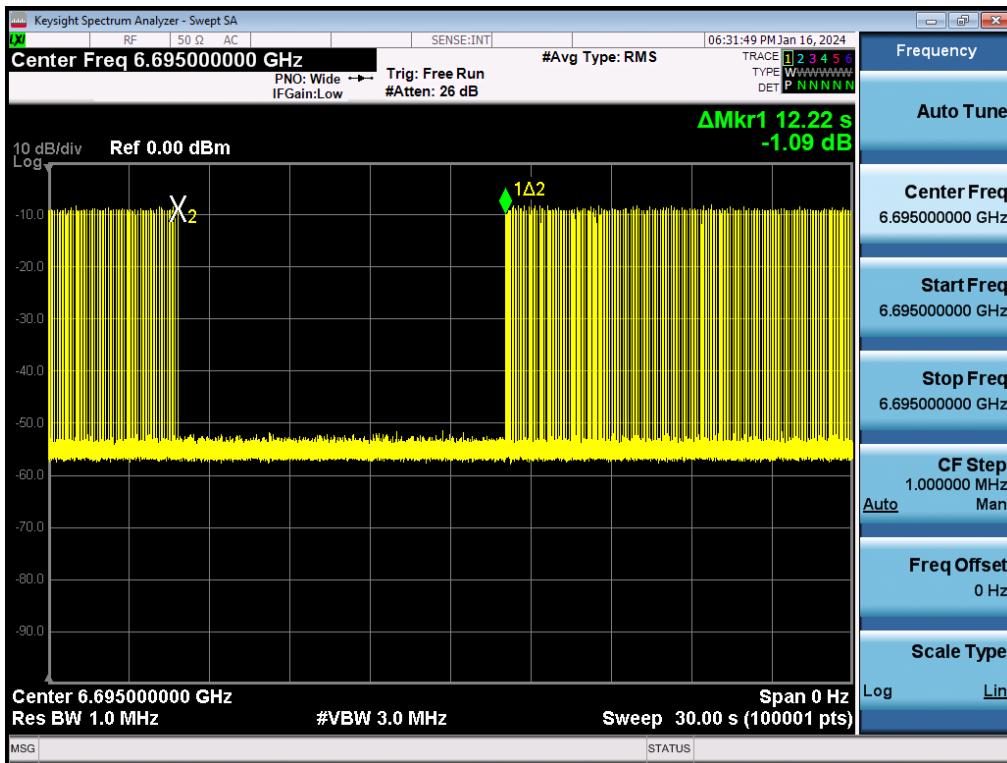


Plot 7-1179. Contention Based Protocol Timing Plot – UNII 7 – 160MHz Channel 143 – Mid

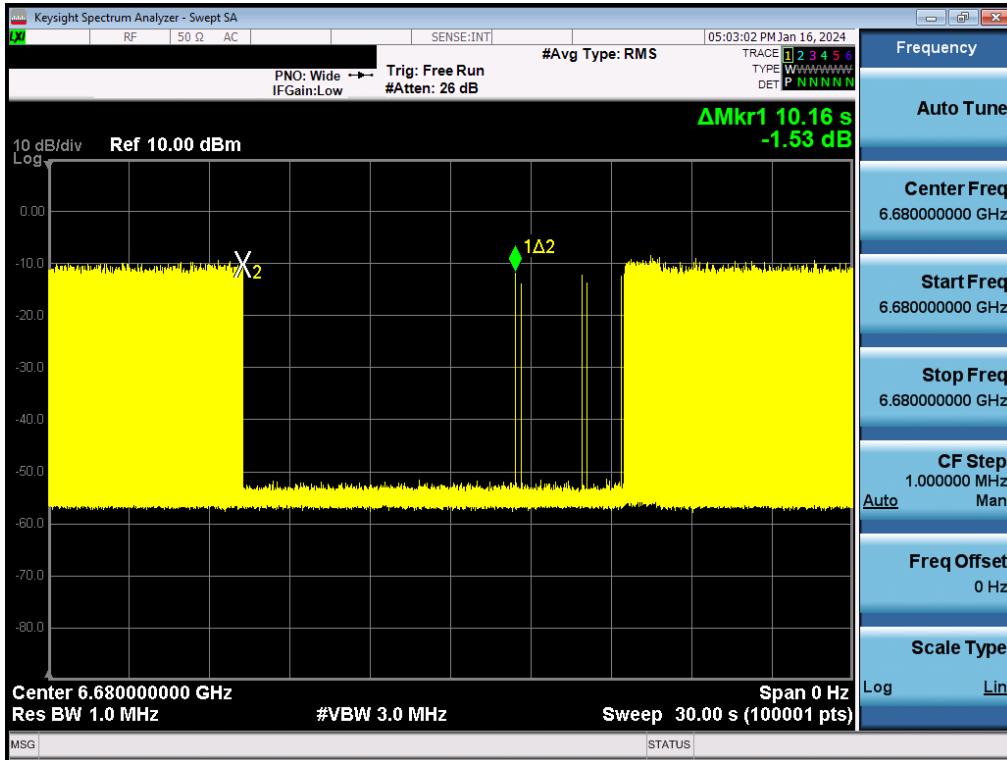


Plot 7-1180. Contention Based Protocol Timing Plot – UNII 7 – 160MHz Channel 143 – High

FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 346 of 510

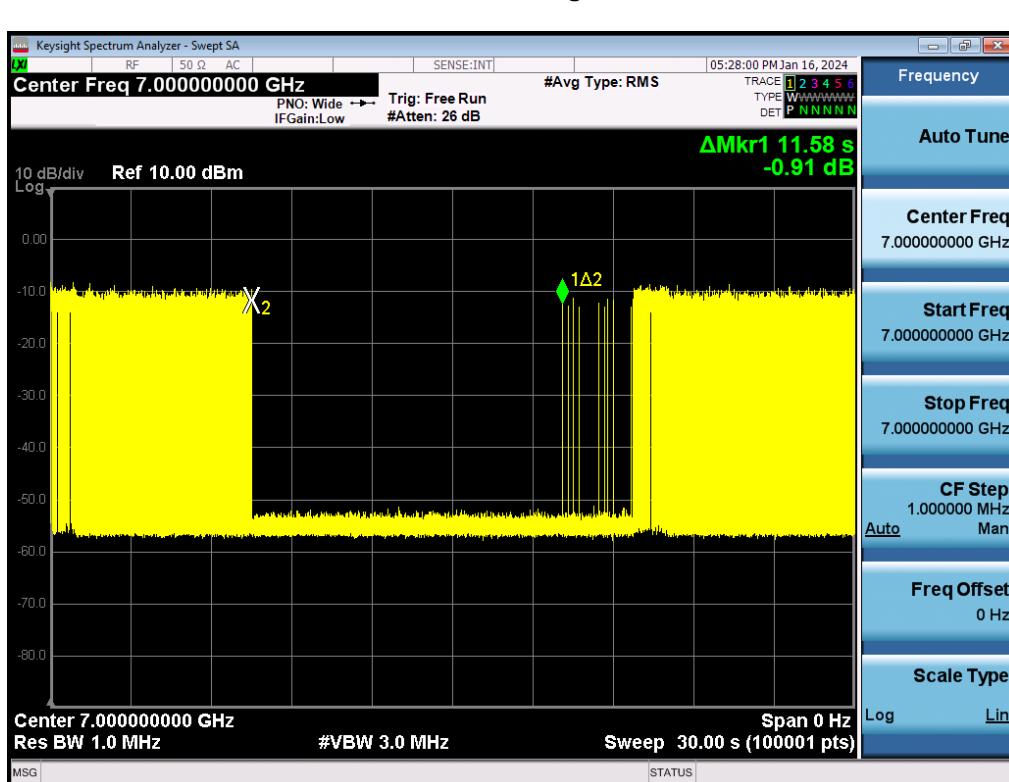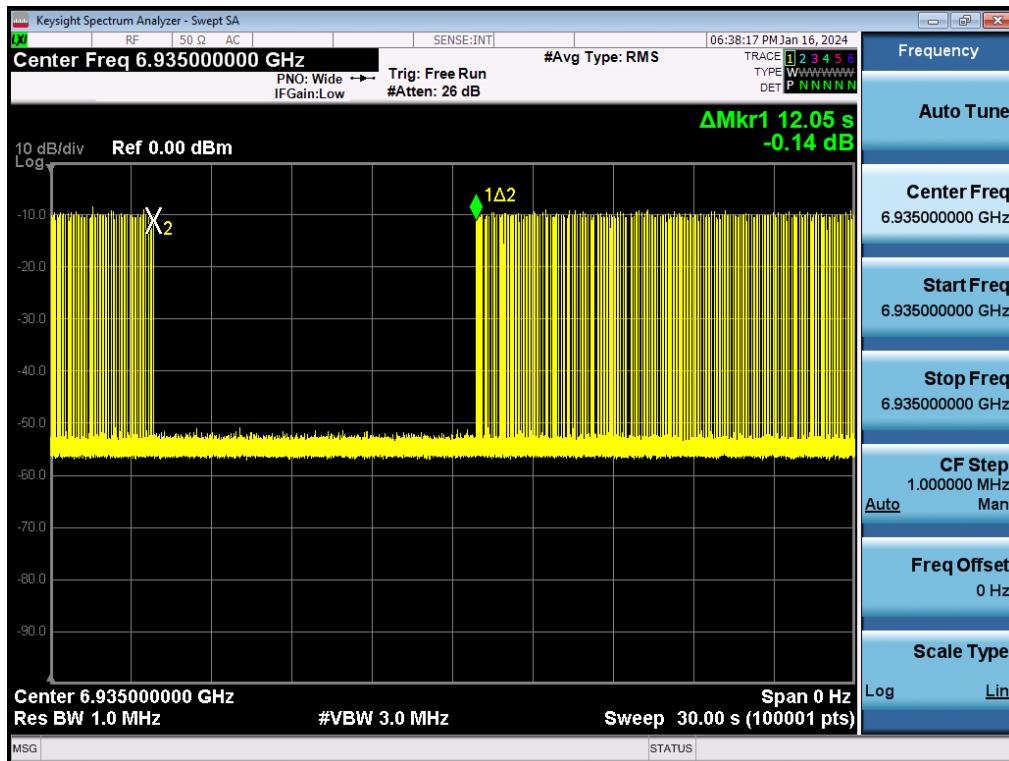


Plot 7-1182. Contention Based Protocol Timing Plot – UNII 8 – 160MHz Channel 207 – Low

FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 347 of 510


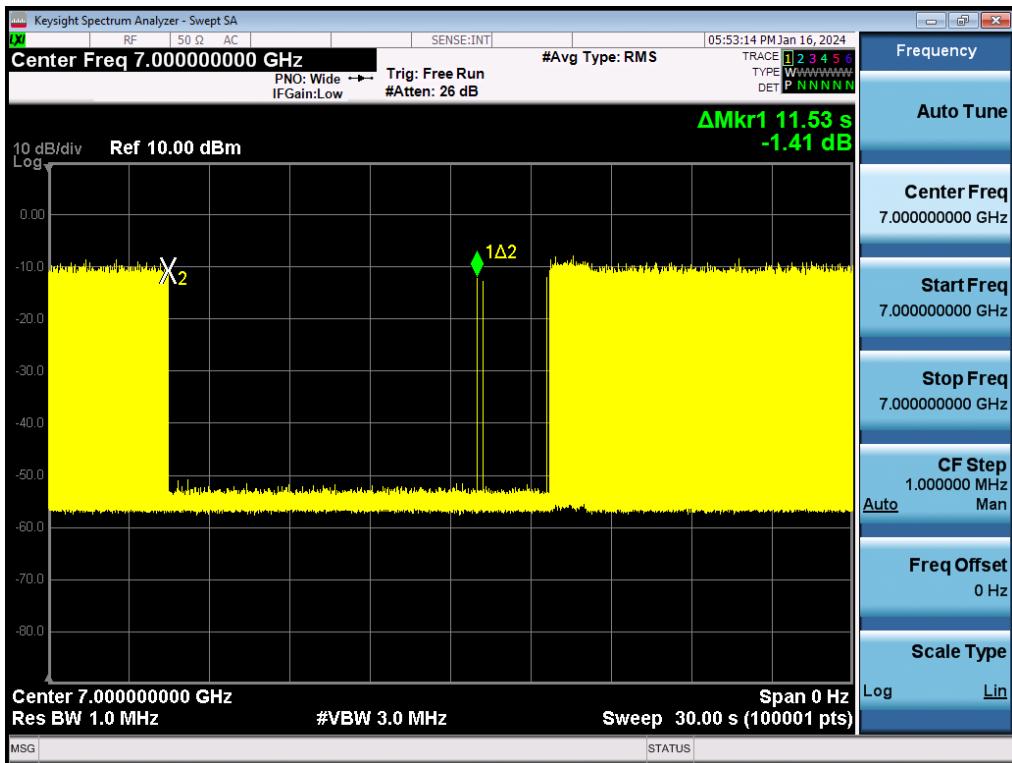


Plot 7-1183. Contention Based Protocol Timing Plot – UNII 8 – 160MHz Channel 207 – Mid

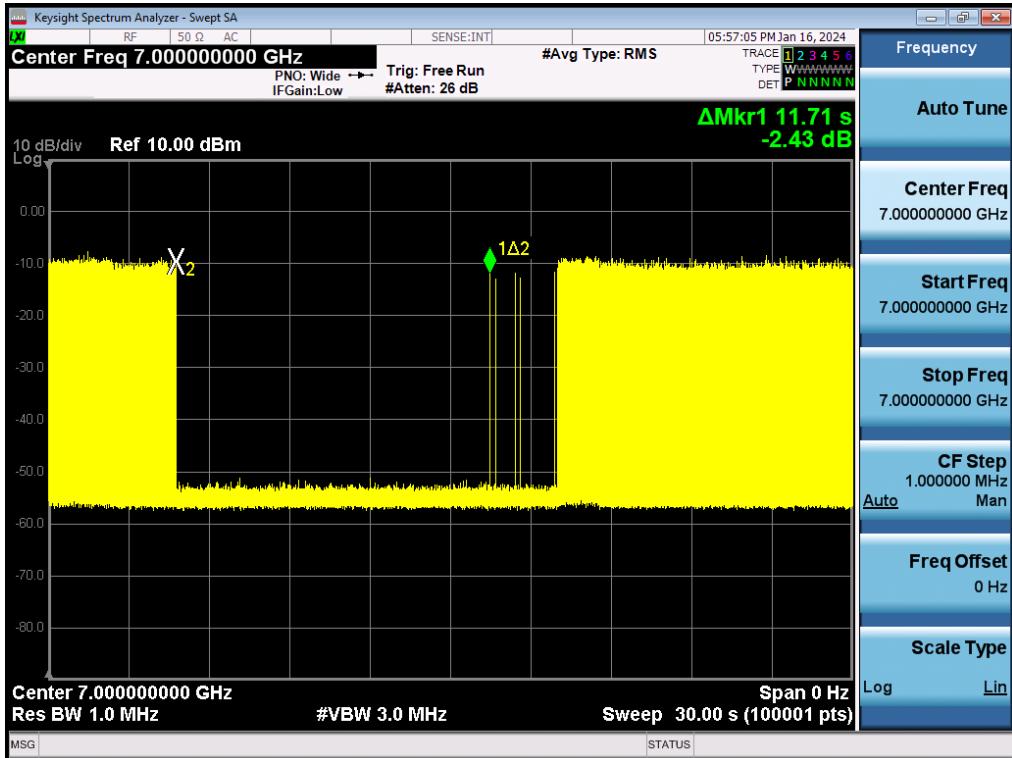


Plot 7-1184. Contention Based Protocol Timing Plot – UNII 8 – 160MHz Channel 207 – High


FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 348 of 510

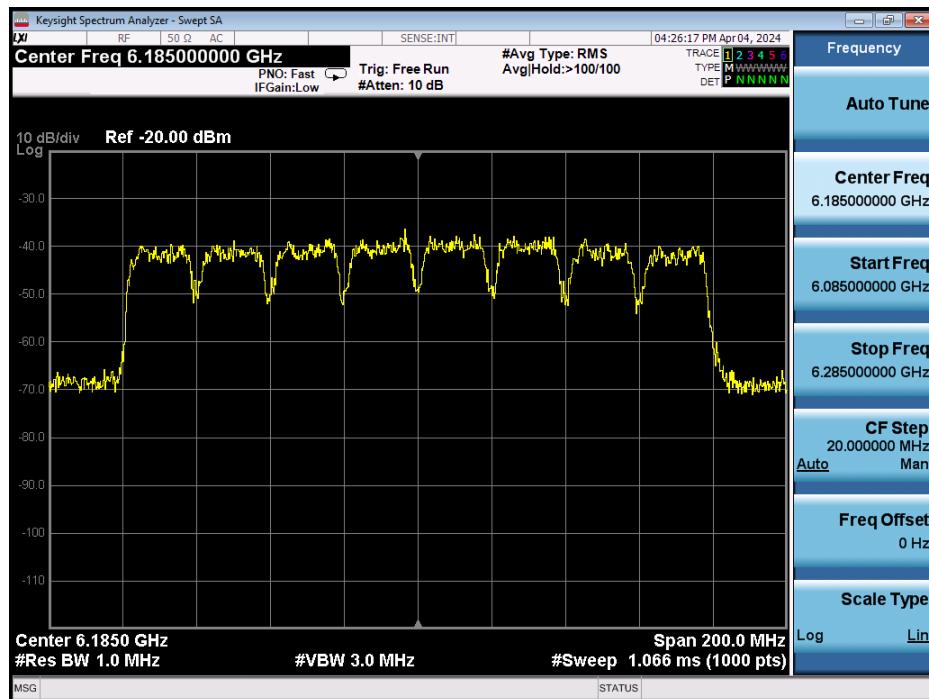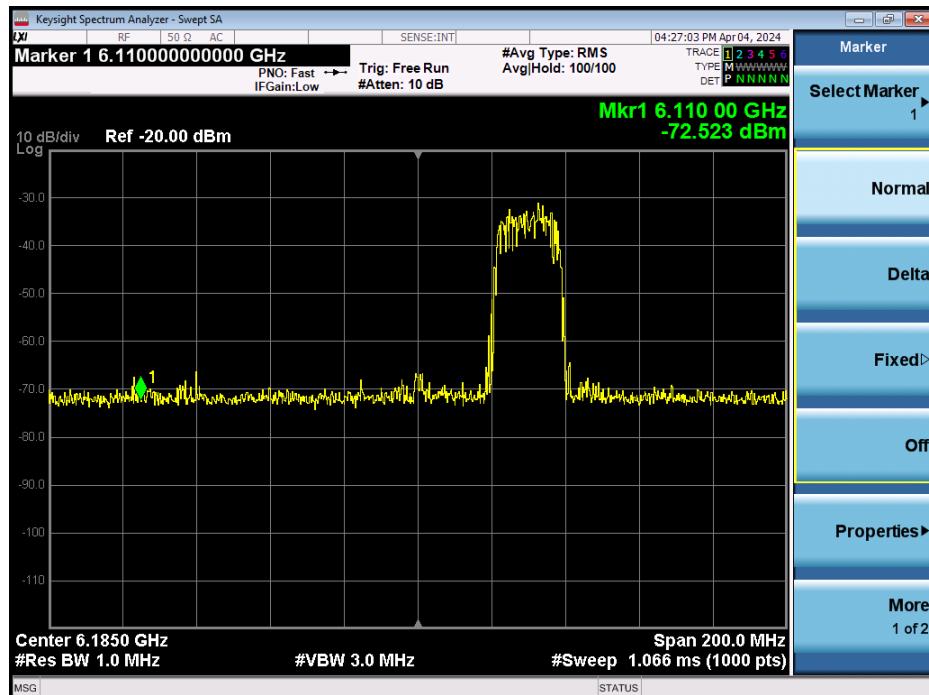**CBP Bandwidth Reduction Plots**

**Plot 7-1185. 160MHz Bandwidth – Before AWGN Signal Injected – Channel 47**

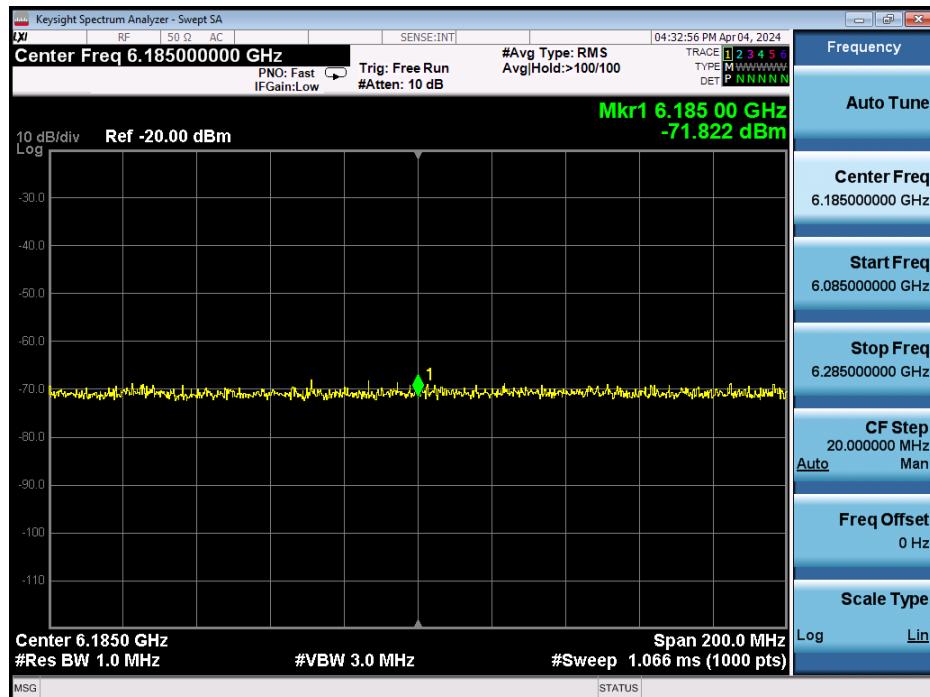**Plot 7-1186. 160MHz Bandwidth – AWGN Signal Injected at Low End – Channel 47**

FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 349 of 510

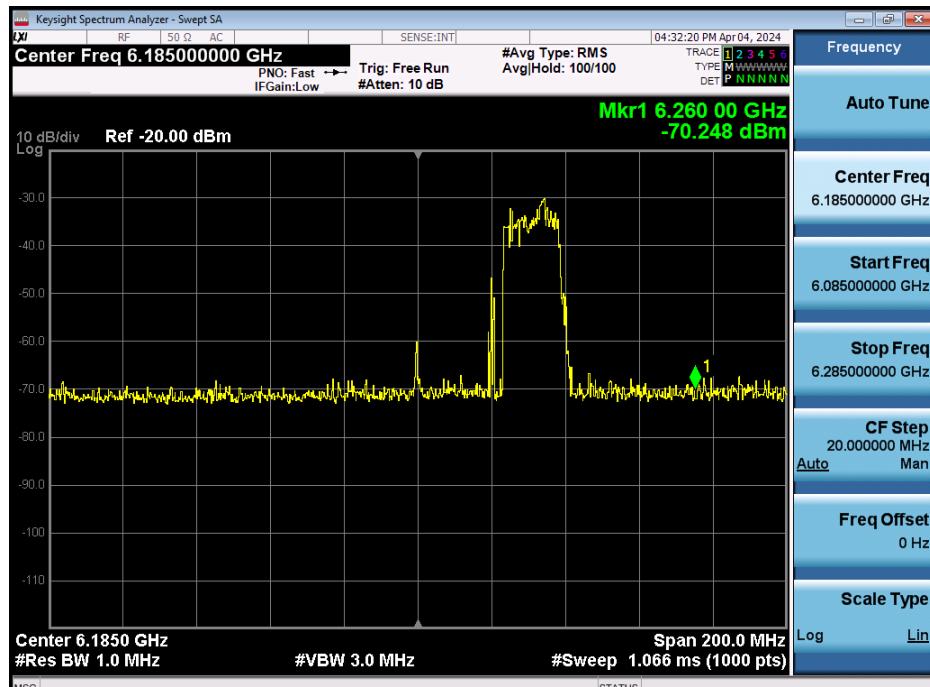

Plot 7-1187. 160MHz Bandwidth – AWGN Signal Injected at Center – Channel 47



Plot 7-1188. 160MHz Bandwidth – AWGN Signal Injected at High End – Channel 47

FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 350 of 510

## 7.7 Radiated Spurious Emissions – Above 1GHz

§15.407(b) §15.205 §15.209; RSS-Gen [8.9]

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. All channels, modes (e.g. 802.11a, 802.11ax(SU) (20MHz BW), 802.11ax(SU) (40MHz BW), 802.11ax(SU) (80MHz), 802.11ax(SU) (160MHz) and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

**For transmitters operating in the 5.925-7.125 GHz band: All emissions outside of the 5.925-7.125 GHz band shall not exceed an EIRP of -27 dBm/MHz. Emissions found in a restricted band are subject to the limits of 15.209 and RSS-Gen (8.9) as shown in the table below.**

Frequency	Field Strength [ $\mu$ V/m]	Measured Distance [Meters]
Above 960.0 MHz	500	3

**Table 7-164. Radiated Limits**

### Test Procedures Used

ANSI C63.10-2013 – Sections 12.7.7.2, 12.7.6, 12.7.5  
KDB 789033 D02 v02r01 – Section G

### Test Settings

#### Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be  $\geq 2 \times$  span/RBW)
6. Averaging type = power (RMS)
7. Sweep time = auto couple
8. Trace was averaged over 100 sweeps


#### Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 351 of 510

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

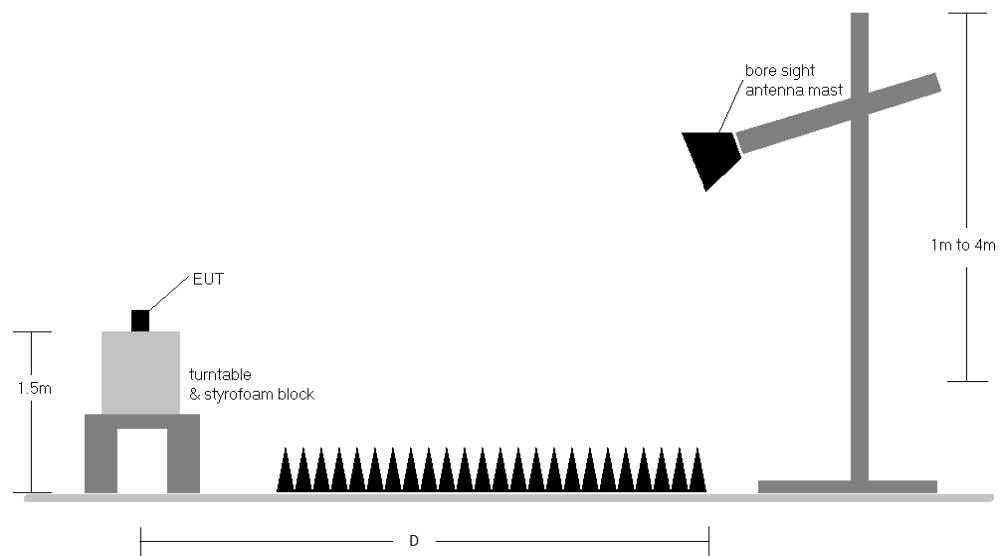

**Figure 7-6. Test Instrument & Measurement Setup**

FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 352 of 510

## Test Notes

1. All emissions that lie in the restricted bands (denoted by a \* next to the frequency) specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-164.
2. All spurious emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-164. All spurious emissions that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB $\mu$ V/m.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas.
6. D is the measurement test distance and emissions 1-18GHz were measured at a 3 meters test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
8. All data rates were investigated and only the worse case is reported
9. The unit was tested with all possible modes and only the highest emission is reported.
10. The “-” shown in the following RSE tables are used to denote a noise floor measurement.
11. All radiated measurements were tested at the highest supported power setting per band.

## Sample Calculations

### Determining Spurious Emissions Levels

- Field Strength Level [dB $\mu$ V/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB] – Preamplifier Gain [dB]
- Margin [dB] = Field Strength Level [dB $\mu$ V/m] – Limit [dB $\mu$ V/m]


### Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots in Section 7.8 was calculated using the formula:  

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 353 of 510

### 7.7.1 Antenna WF5B Radiated Spurious Emission

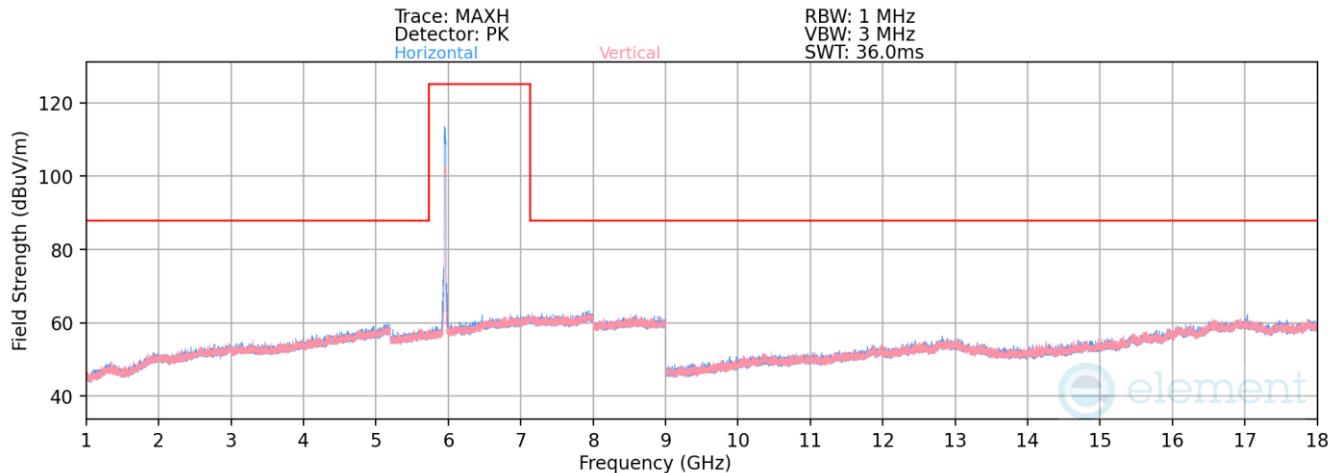


Plot 7-1189. Radiated Spurious Emissions above 1GHz Antenna WF5B (802.11ax – Ch. 1)

Mode: 802.11ax  
 Data Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5955MHz  
 Channel: 1

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
* 11910.00	Average	H	-	-	-85.62	19.31	40.69	53.98	-13.29
* 11910.00	Peak	H	-	-	-74.27	19.31	52.04	73.98	-21.94
* 17865.00	Average	H	-	-	-86.09	26.60	45.02	53.98	-8.96
* 17865.00	Peak	H	-	-	-74.24	26.60	57.38	73.98	-16.60

Table 7-165. Radiated Spurious Emission Measurements Antenna WF5B

FCC ID: BCGA2837 IC: 579C-A2837	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 354 of 510	

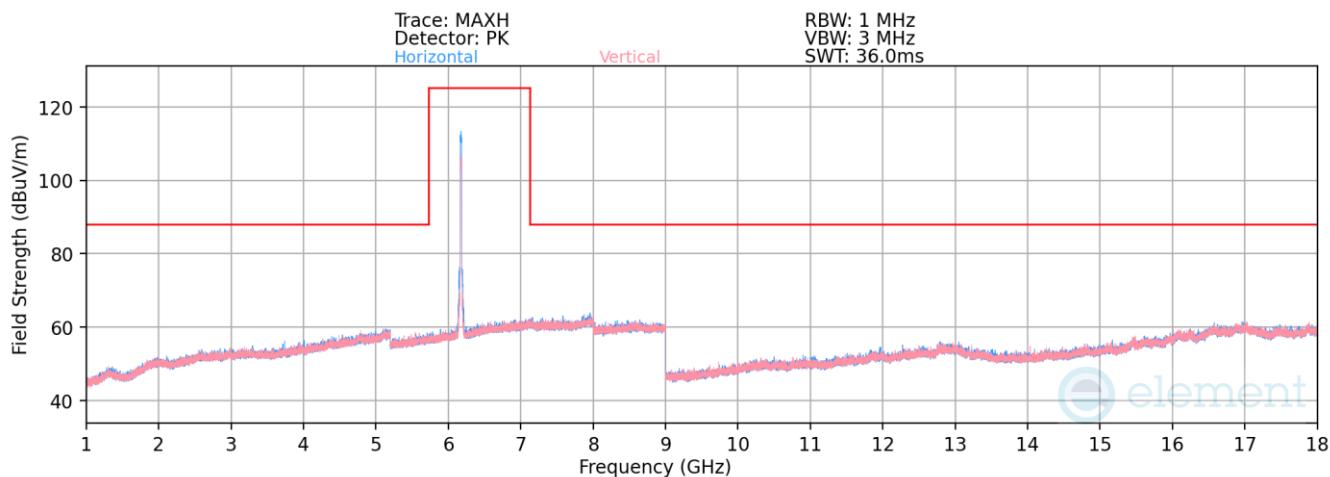


Plot 7-1190. Radiated Spurious Emissions above 1GHz Antenna WF5B (802.11ax – Ch. 45, MCS0)

Mode: 802.11ax  
 Data Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 6175MHz  
 Channel: 45

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
* 12350.00	Peak	V	-	-	-73.99	20.83	53.84	73.98	-20.14
* 12350.00	Average	V	-	-	-86.10	21.02	41.92	53.98	-12.06

Table 7-166. Radiated Spurious Emission Measurements Antenna WF5B

FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device			

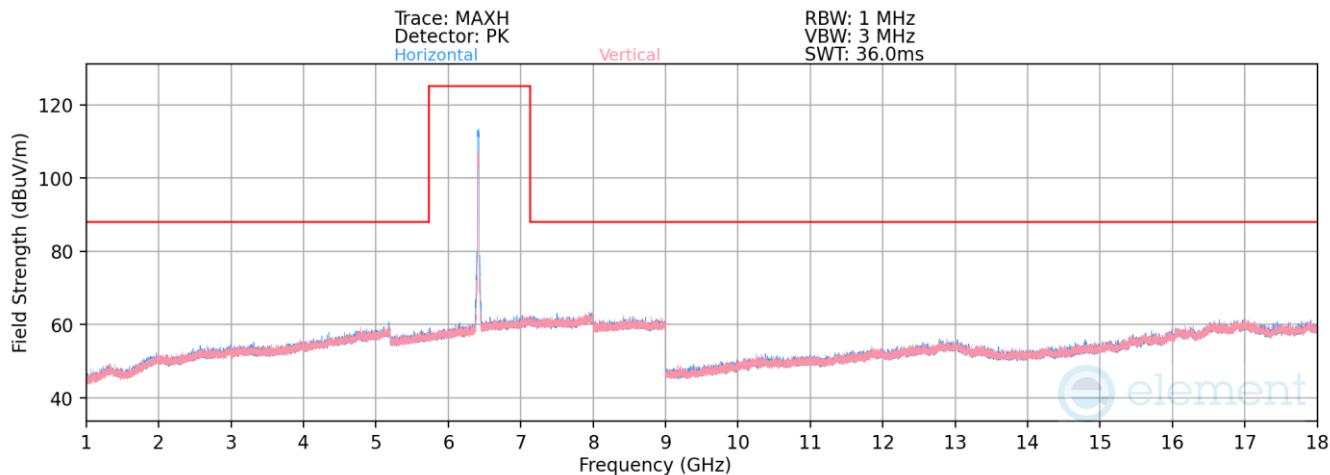


Plot 7-1191. Radiated Spurious Emissions above 1GHz Antenna WF5B (802.11ax – Ch. 93)

Mode: 802.11ax  
 Data Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 6415MHz  
 Channel: 93

Frequency [MHz]	sector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
12830.00	Average	V	-	-	-85.05	22.26	44.21	68.20	-23.99
12830.00	Peak	V	-	-	-74.14	22.26	55.12	88.23	-33.11

Table 7-167. Radiated Spurious Emission Measurements Antenna WF5B

FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device			

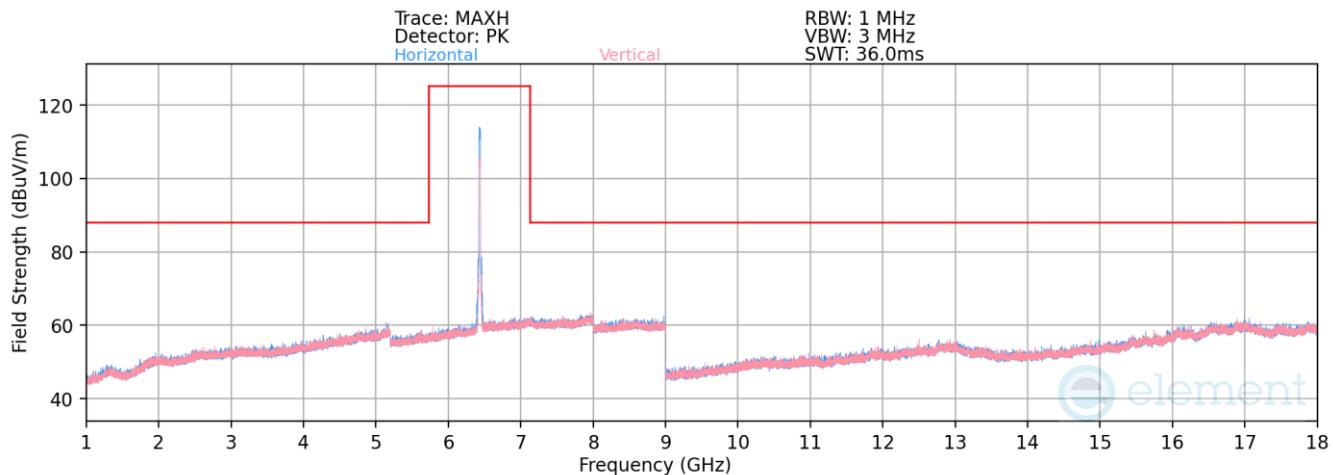


Plot 7-1192. Radiated Spurious Emissions above 1GHz Antenna WF5B (802.11ax – Ch. 97)

Mode: 802.11ax  
 Data Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 6435MHz  
 Channel: 97

Frequency [MHz]	sector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
12870.00	Average	V	-	-	-85.40	21.68	43.28	68.20	-24.92
12870.00	Peak	V	-	-	-74.37	21.68	54.31	88.23	-33.92

Table 7-168. Radiated Spurious Emission Measurements Antenna WF5B

FCC ID: BCGA2837 IC: 579C-A2837	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 357 of 510	

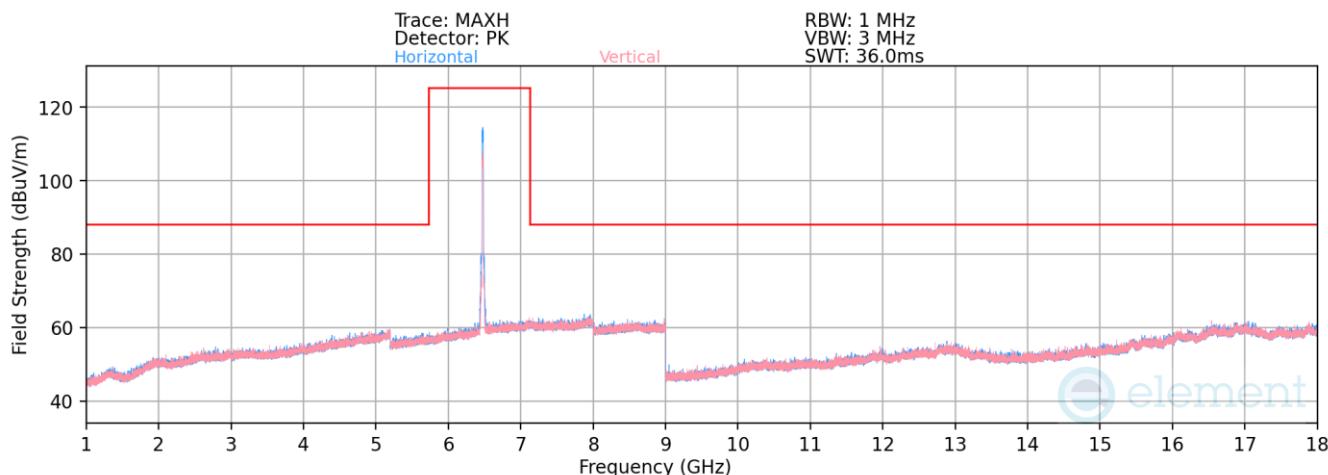


**Plot 7-1193. Radiated Spurious Emissions above 1GHz Antenna WF5B (802.11ax – Ch. 105, MCS0)**

Mode: 802.11ax  
 Data Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 6475MHz  
 Channel: 105

Frequency [MHz]	Sector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12950.00	Average	V	-	-	-85.78	21.76	42.98	68.20	-25.22
12950.00	Peak	V	-	-	-74.24	21.76	54.52	88.23	-33.71

**Table 7-169. Radiated Spurious Emission Measurements Antenna WF5B**

FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 358 of 510

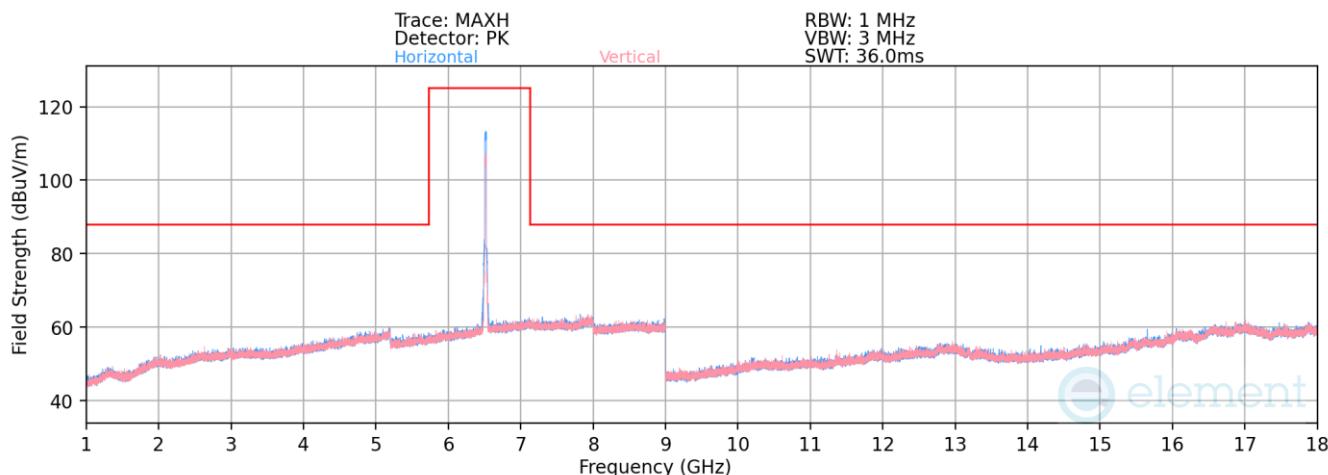


Plot 7-1194. Radiated Spurious Emissions above 1GHz Antenna WF5B (802.11ax – Ch. 113)

Mode: 802.11ax  
 Data Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 6515MHz  
 Channel: 113

Frequency [MHz]	ector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13030.00	Average	V	-	-	-85.42	22.00	43.58	68.20	-24.62
13030.00	Peak	V	-	-	-73.96	22.00	55.04	88.23	-33.19

Table 7-170. Radiated Spurious Emission Measurements Antenna WF5B

FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 359 of 510

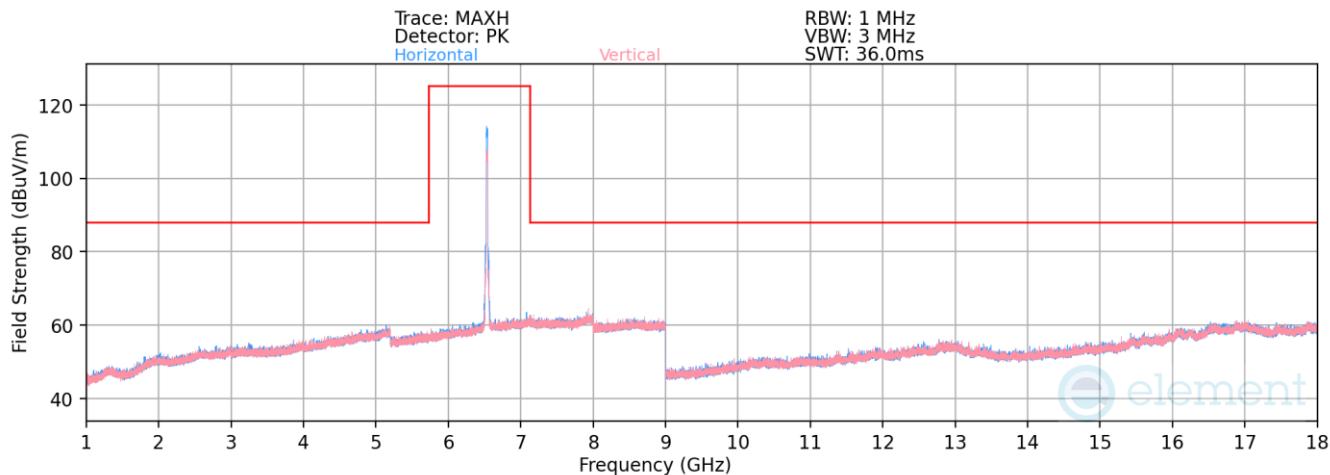


Plot 7-1195. Radiated Spurious Emissions above 1GHz Antenna WF5B (802.11ax – Ch. 117)

Mode: 802.11ax  
 Data Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 6535MHz  
 Channel: 117

Frequency [MHz]	sector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
13070.00	Average	V	-	-	-85.26	21.52	43.26	68.20	-24.94
13070.00	Peak	V	-	-	-73.71	21.52	54.81	88.23	-33.42

Table 7-171. Radiated Spurious Emission Measurements Antenna WF5B

FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device			

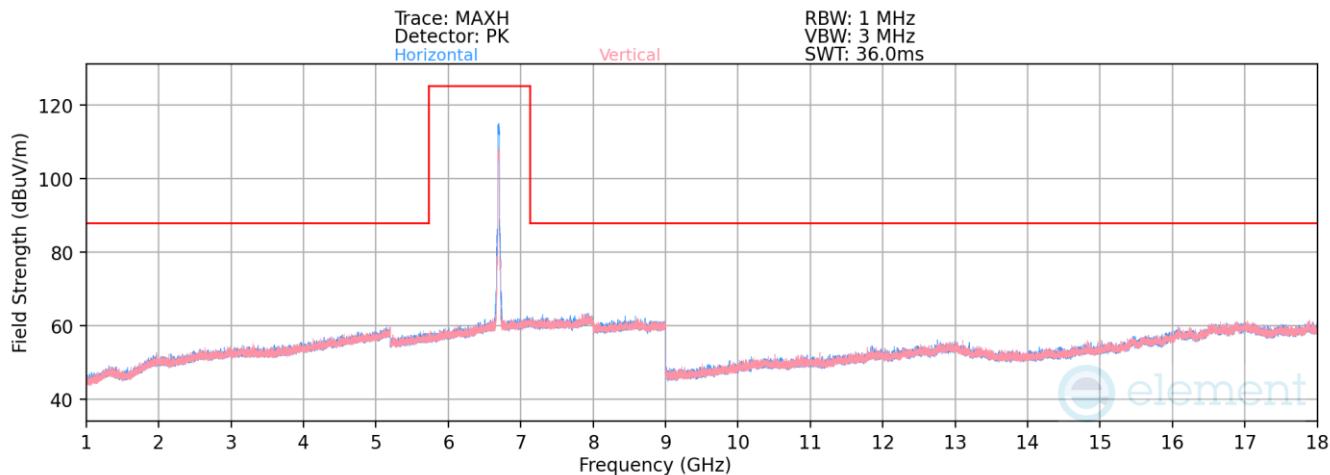


Plot 7-1196. Radiated Spurious Emissions above 1GHz Antenna WF5B (802.11ax – Ch. 149, MCS0)

Mode: 802.11ax  
 Data Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 6695MHz  
 Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
* 13390.00	Peak	V	-	-	-74.91	22.47	54.56	73.98	-19.42
* 13390.00	Average	V			-86.32	22.47	43.15	53.98	-10.83

Table 7-172. Radiated Spurious Emission Measurements Antenna WF5B

FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device			

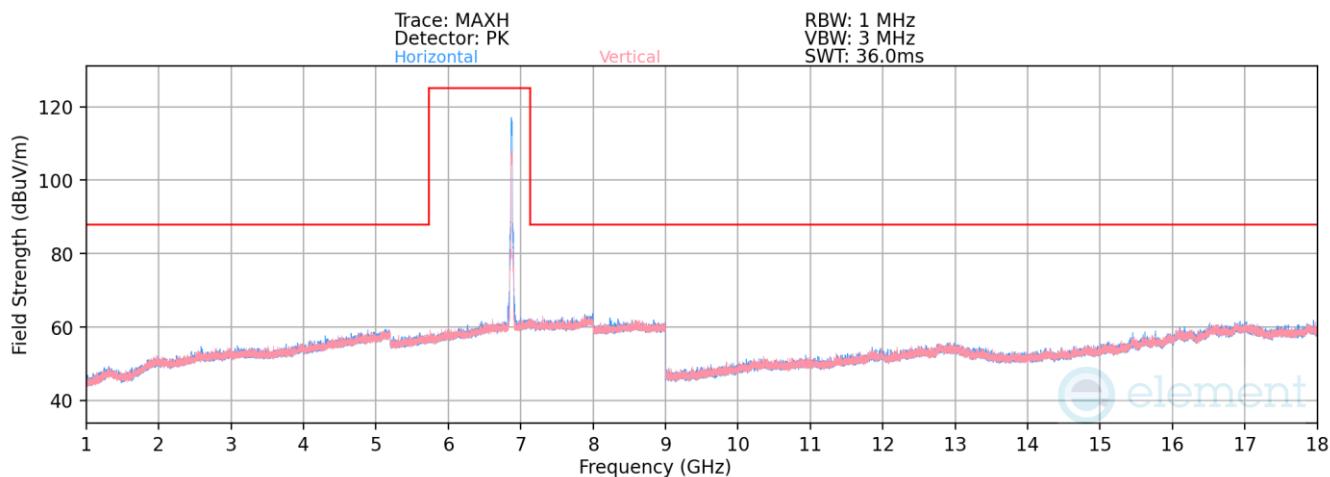


Plot 7-1197. Radiated Spurious Emissions above 1GHz Antenna WF5B (802.11ax – Ch. 185)

Mode: 802.11ax  
 Data Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 6875MHz  
 Channel: 185

Frequency [MHz]	sector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
13750.00	Average	V	-	-	-84.88	21.79	43.91	68.20	-24.29
13750.00	Peak	V	-	-	-73.05	21.79	55.74	88.23	-32.49

Table 7-173. Radiated Spurious Emission Measurements Antenna WF5B

FCC ID: BCGA2837 IC: 579C-A2837	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 362 of 510	

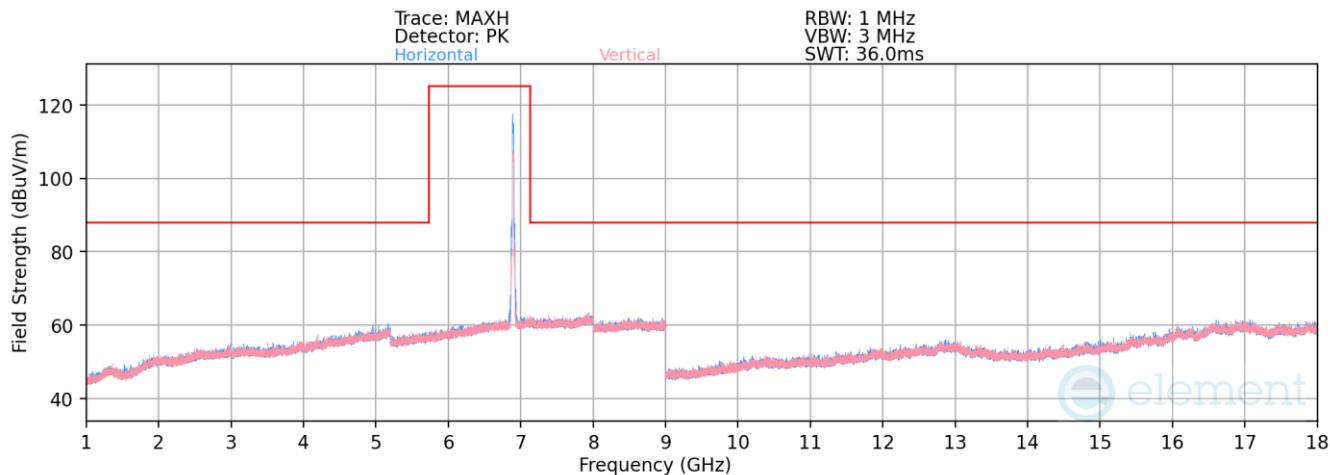


Plot 7-1198. Radiated Spurious Emissions above 1GHz Antenna WF5B (802.11ax – Ch. 189)

Mode: 802.11ax  
 Data Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 6895MHz  
 Channel: 189

Frequency [MHz]	sector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
13750.00	Average	V	-	-	-84.88	22.00	44.12	68.20	-24.08
13750.00	Peak	V	-	-	-72.52	22.00	56.48	88.23	-31.75

Table 7-174. Radiated Spurious Emission Measurements Antenna WF5B

FCC ID: BCGA2837 IC: 579C-A2837	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 363 of 510	

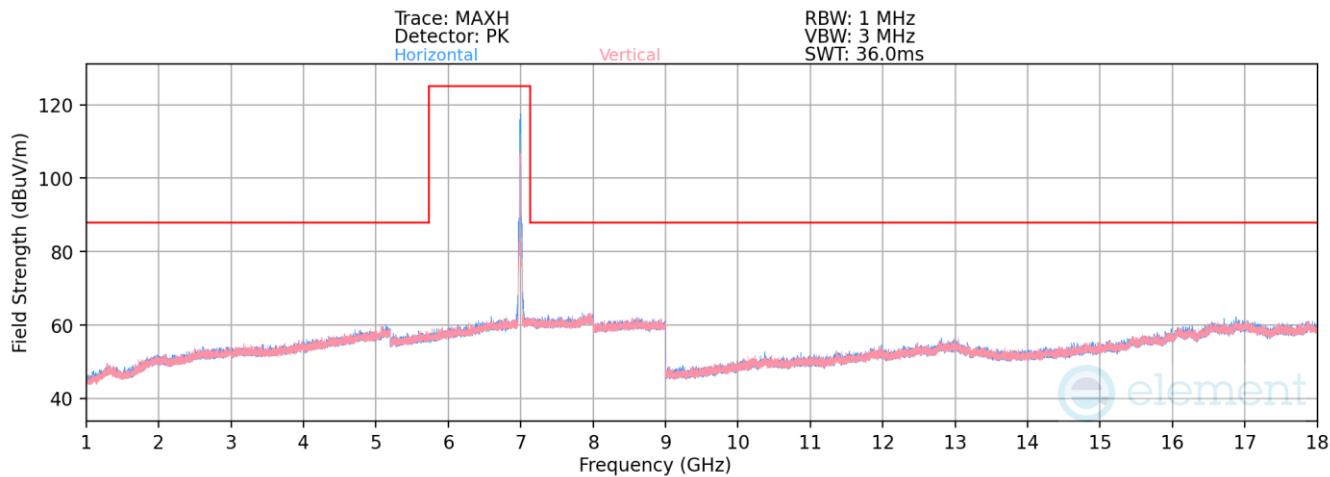


Plot 7-1199. Radiated Spurious Emissions above 1GHz Antenna WF5B (802.11ax – Ch. 209, MCS0)

Mode: 802.11ax  
 Data Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 6995MHz  
 Channel: 209

Frequency [MHz]	sector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
13990.00	Average	V	-	-	-85.54	22.21	43.67	68.20	-24.53
13990.00	Peak	V	-	-	-73.40	22.21	55.81	88.23	-32.42

Table 7-175. Radiated Spurious Emission Measurements Antenna WF5B

FCC ID: BCGA2837 IC: 579C-A2837	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 364 of 510	

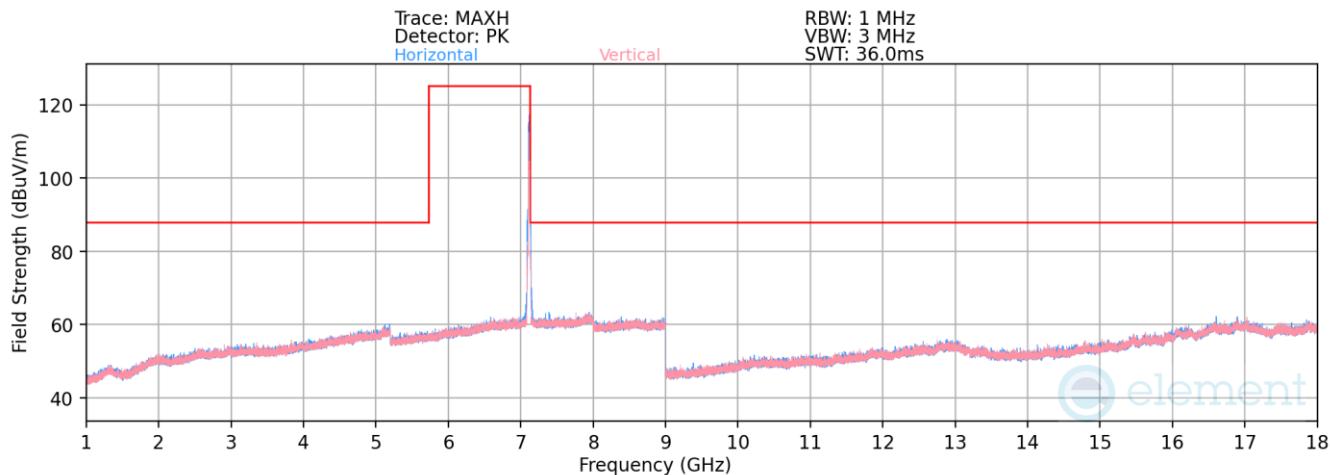

Plot 7-1200. Radiated Spurious Emissions above 1GHz Antenna WF5B (802.11ax – Ch. 233)


Mode: 802.11ax  
 Data Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 7115MHz  
 Channel: 233

Frequency [MHz]	sector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
14230.00	Average	V	-	-	-85.57	22.31	43.74	68.20	-24.46
14230.00	Peak	V	-	-	-73.34	22.31	55.97	88.23	-32.26

Table 7-176. Radiated Spurious Emission Measurements Antenna WF5B

FCC ID: BCGA2837 IC: 579C-A2837	element			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device			

## 7.7.2 Antenna 4a Radiated Spurious Emission

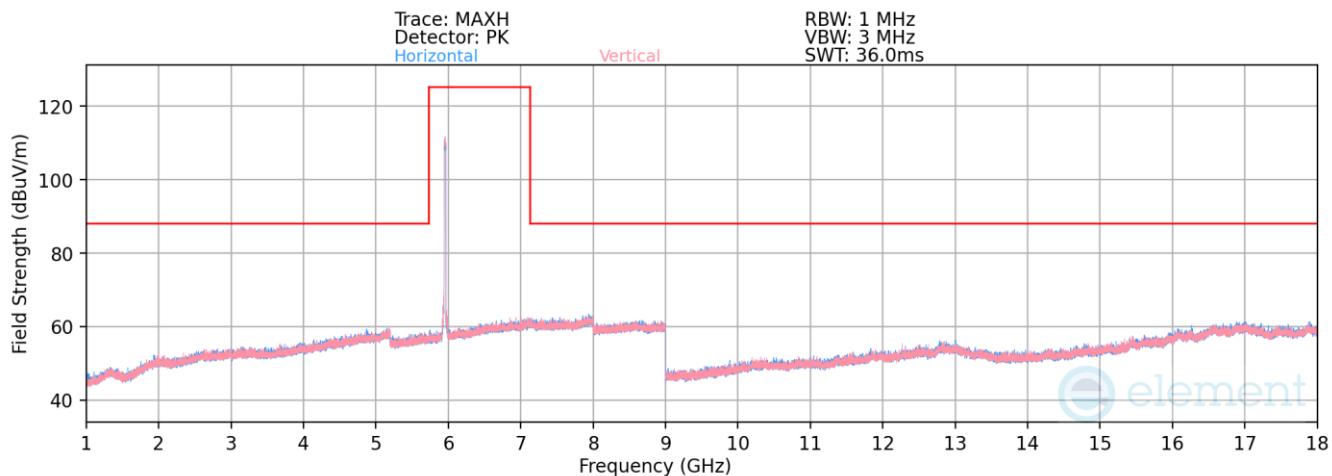


**Plot 7-1201. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 1)**

Mode: 802.11ax  
 Data Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5955MHz  
 Channel: 1

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
* 11910.00	Average	H	-	-	-85.81	19.31	40.51	53.98	-13.47
* 11910.00	Peak	H	-	-	-73.77	19.31	52.54	73.98	-21.44
* 17865.00	Average	V	-	-	-86.28	26.60	46.03	53.98	-7.95
* 17865.00	Peak	V	-	-	-74.63	26.60	57.24	73.98	-16.74

**Table 7-177. Radiated Spurious Emission Measurements Antenna 4a**

FCC ID: BCGA2837 IC: 579C-A2837	 <b>element</b> <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 366 of 510	

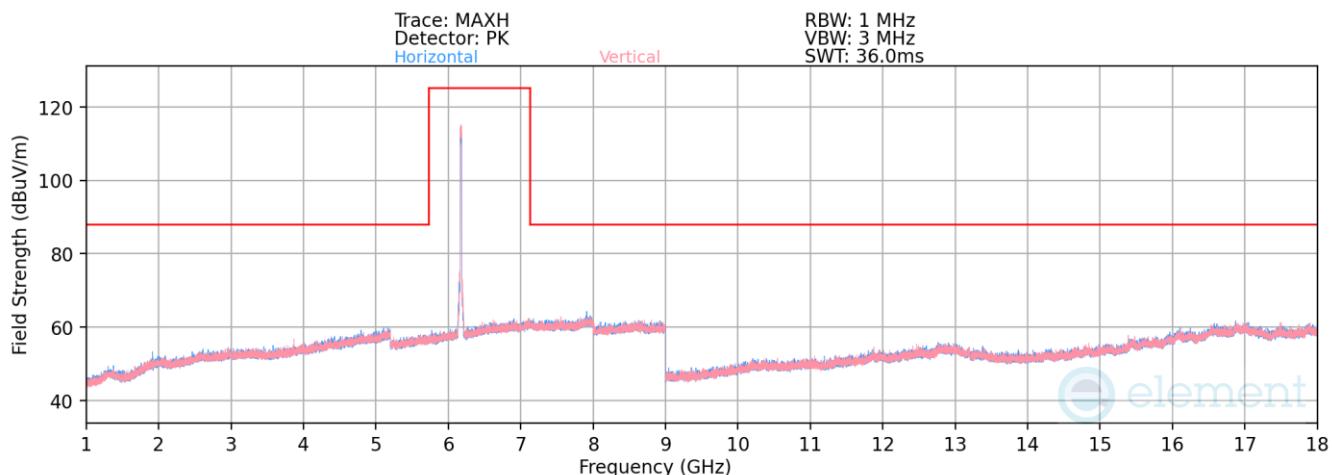


Plot 7-1202. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 45, MCS0)

Mode: 802.11ax  
 Data Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 6175MHz  
 Channel: 45

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
* 12350.00	Peak	V	-	-	-74.52	20.83	53.31	73.98	-20.67
* 12350.00	Average	V	-	-	-86.16	21.02	41.86	53.98	-12.12

Table 7-178. Radiated Spurious Emission Measurements Antenna 4a

FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device			

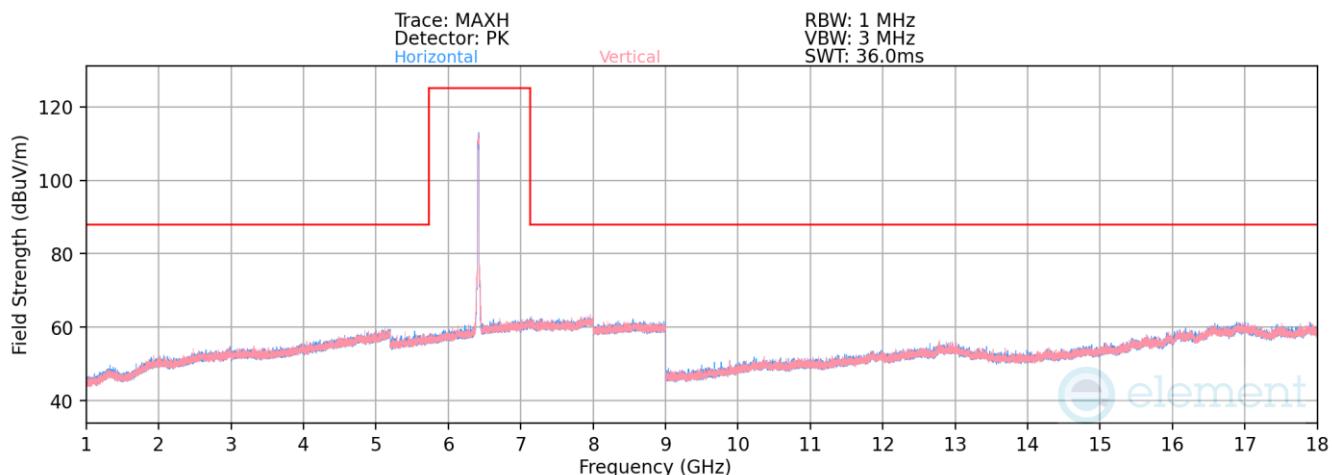


Plot 7-1203. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 93)

Mode: 802.11ax  
 Data Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 6415MHz  
 Channel: 93

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
12830.00	Average	V	-	-	-85.39	22.26	43.87	68.20	-24.33
12830.00	Peak	V	-	-	-73.95	22.26	55.31	88.23	-32.92

Table 7-179. Radiated Spurious Emission Measurements Antenna 4a

FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device			

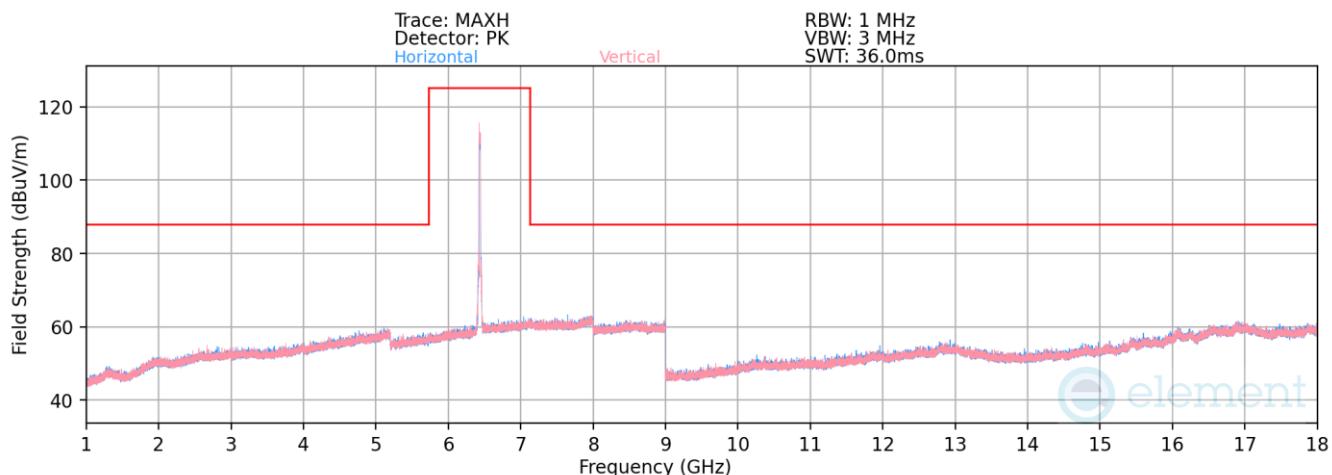


Plot 7-1204. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 97)

Mode: 802.11ax  
 Data Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 6435MHz  
 Channel: 97

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
12870.00	Average	V	-	-	-85.43	21.68	43.25	68.20	-24.95
12870.00	Peak	V	-	-	-74.36	21.68	54.32	88.23	-33.91

Table 7-180. Radiated Spurious Emission Measurements Antenna 4a

FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 369 of 510

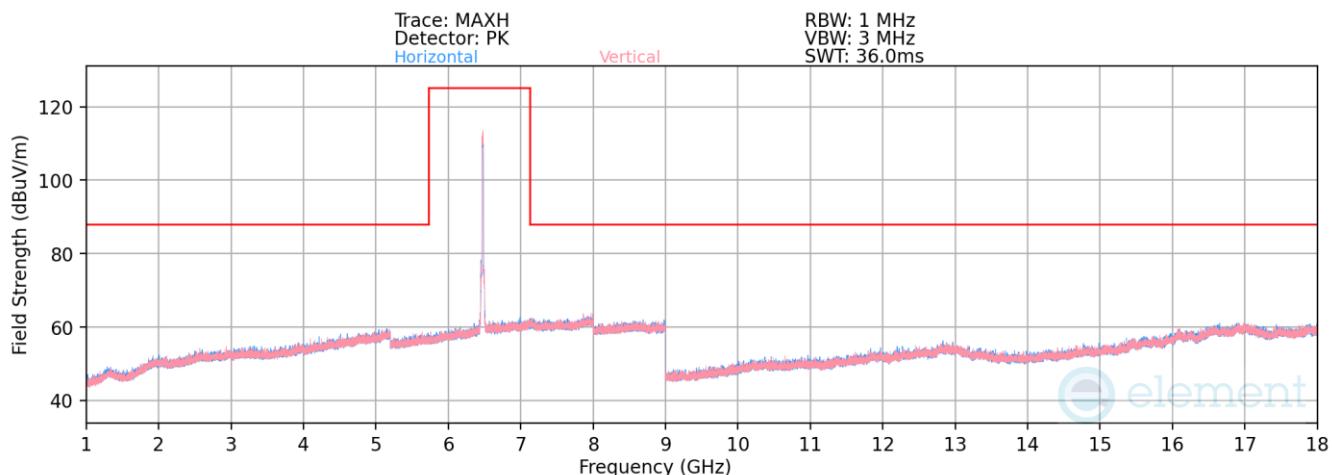


Plot 7-1205. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 105, MCS0)

Mode: 802.11ax  
 Data Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 6475MHz  
 Channel: 105

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
12950.00	Average	V	-	-	-84.68	21.76	44.08	68.20	-24.12
12950.00	Peak	V	-	-	-73.76	21.76	55.00	88.23	-33.23

Table 7-181. Radiated Spurious Emission Measurements Antenna 4a

FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 370 of 510

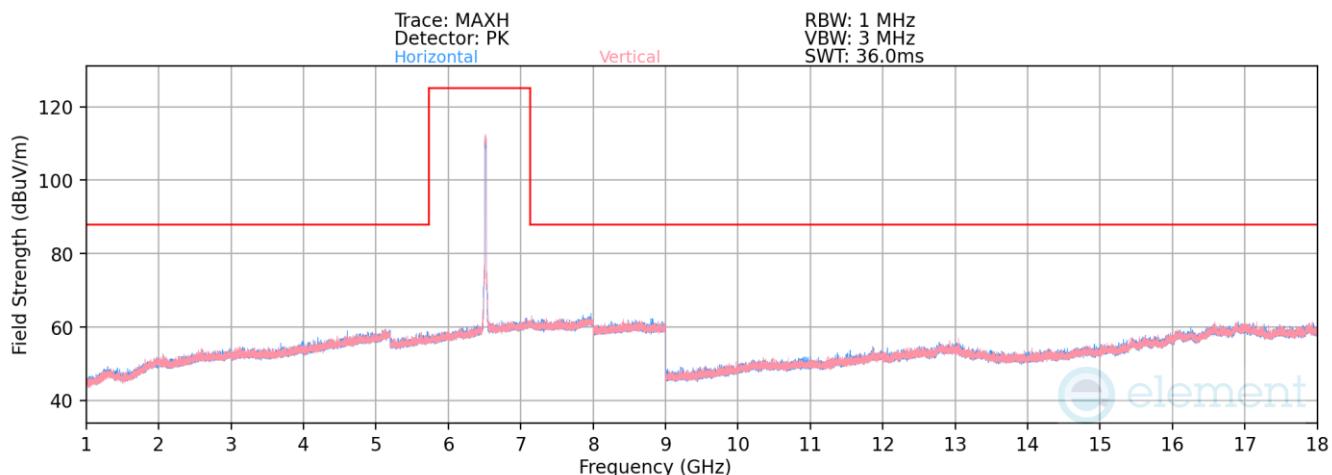


Plot 7-1206. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 113)

Mode: 802.11ax  
 Data Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 6515MHz  
 Channel: 113

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
13030.00	Average	V	-	-	-85.35	22.00	43.65	68.20	-24.55
13030.00	Peak	V	-	-	-74.37	22.00	54.63	88.23	-33.60

Table 7-182. Radiated Spurious Emission Measurements Antenna 4a

FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 371 of 510

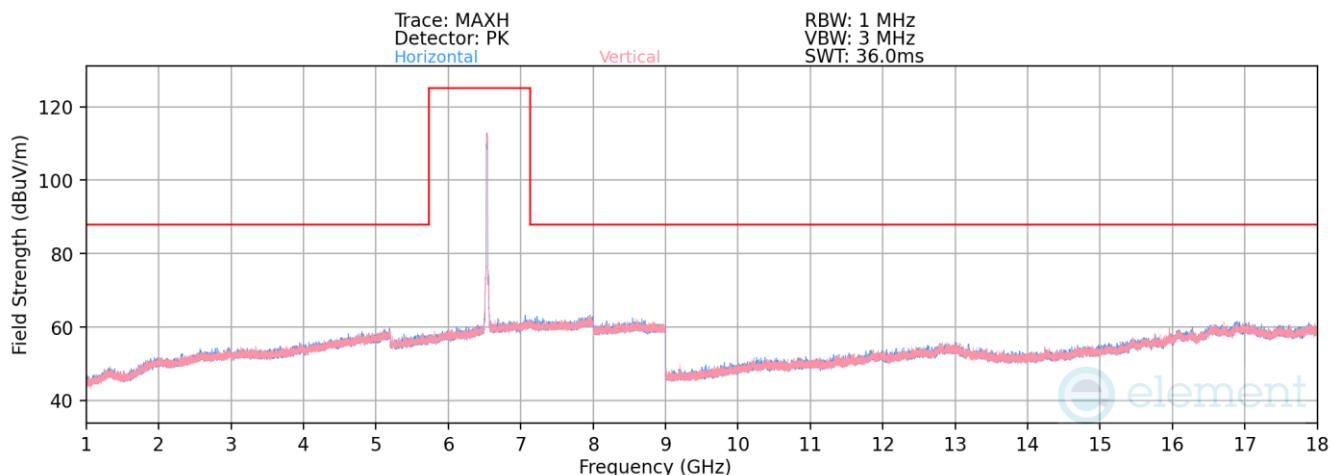


Plot 7-1207. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 117)

Mode: 802.11ax  
 Data Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 6535MHz  
 Channel: 117

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
13070.00	Average	V	-	-	-85.25	21.52	43.27	68.20	-24.93
13070.00	Peak	V	-	-	-73.98	21.52	54.54	88.23	-33.69

Table 7-183. Radiated Spurious Emission Measurements Antenna 4a

FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device			

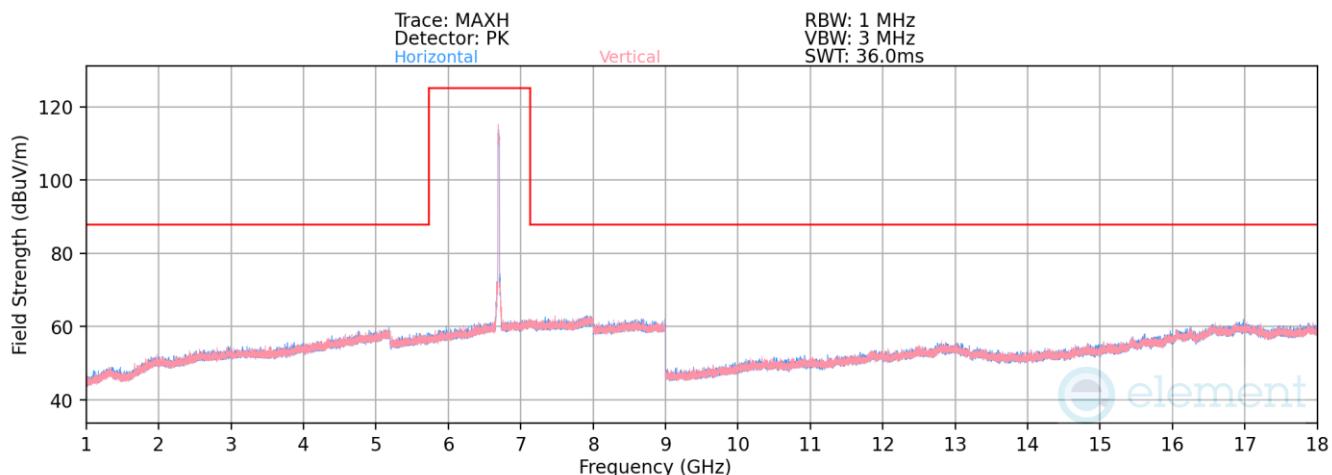


Plot 7-1208. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 149, MCS0)

Mode: 802.11ax  
 Data Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 6695MHz  
 Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
* 13390.00	Peak	V	-	-	-74.67	22.47	54.80	73.98	-19.18
* 13390.00	Average	V			-86.07	22.47	43.40	53.98	-10.58

Table 7-184. Radiated Spurious Emission Measurements Antenna 4a

FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 373 of 510

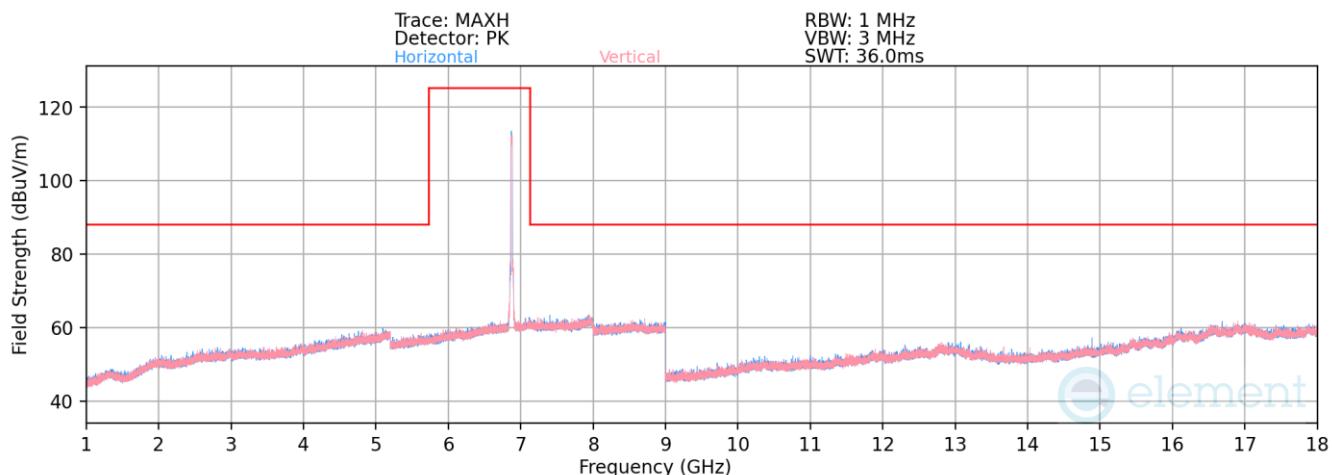


Plot 7-1209. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 185)

Mode: 802.11ax  
 Data Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 6875MHz  
 Channel: 185

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
13750.00	Average	V	-	-	-84.66	21.79	44.13	68.20	-24.07
13750.00	Peak	V	-	-	-73.12	21.79	55.67	88.23	-32.56

Table 7-185. Radiated Spurious Emission Measurements Antenna 4a

FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device			

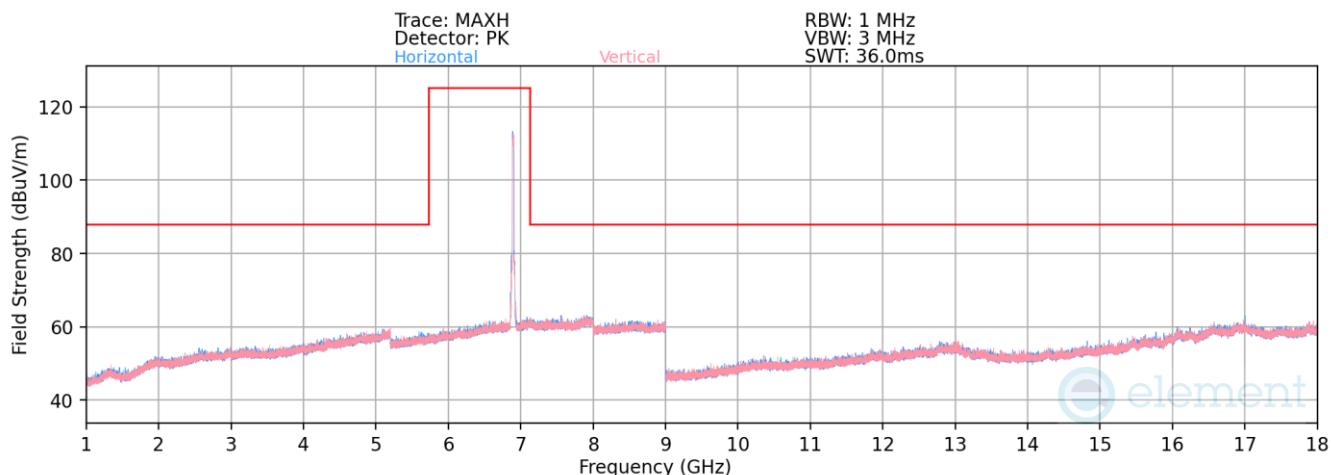


**Plot 7-1210. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 189)**

Mode: 802.11ax  
 Data Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 6895MHz  
 Channel: 189

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
13750.00	Average	V	-	-	-84.74	22.00	44.26	68.20	-23.94
13750.00	Peak	V	-	-	-72.69	22.00	56.31	88.23	-31.92

**Table 7-186. Radiated Spurious Emission Measurements Antenna 4a**

FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 375 of 510

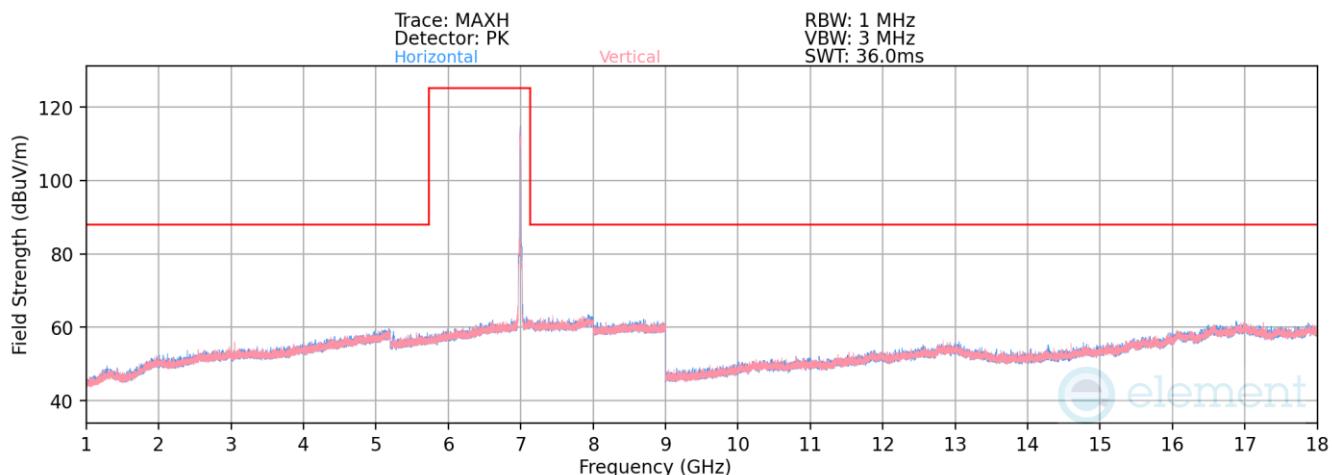


Plot 7-1211. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 209, MCS0)

Mode: 802.11ax  
 Data Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 6995MHz  
 Channel: 209

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
13990.00	Average	V	-	-	-85.22	22.21	43.99	68.20	-24.21
13990.00	Peak	V	-	-	-73.23	22.21	55.98	88.23	-32.25

Table 7-187. Radiated Spurious Emission Measurements Antenna 4a

FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 376 of 510

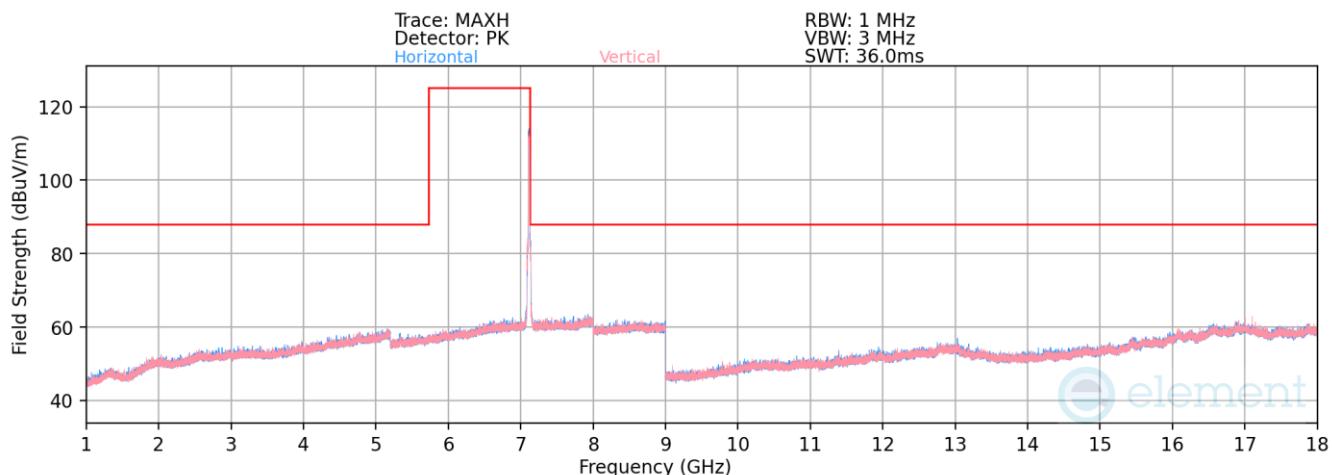

Plot 7-1212. Radiated Spurious Emissions above 1GHz Antenna 4a (802.11ax – Ch. 233)


Mode: 802.11ax  
 Data Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 7115MHz  
 Channel: 233

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
14230.00	Average	V	-	-	-85.02	22.31	44.29	68.20	-23.91
14230.00	Peak	V	-	-	-73.24	22.31	56.07	88.23	-32.16

Table 7-188. Radiated Spurious Emission Measurements Antenna 4a

FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device			

### 7.7.3 Antenna 2a Radiated Spurious Emission

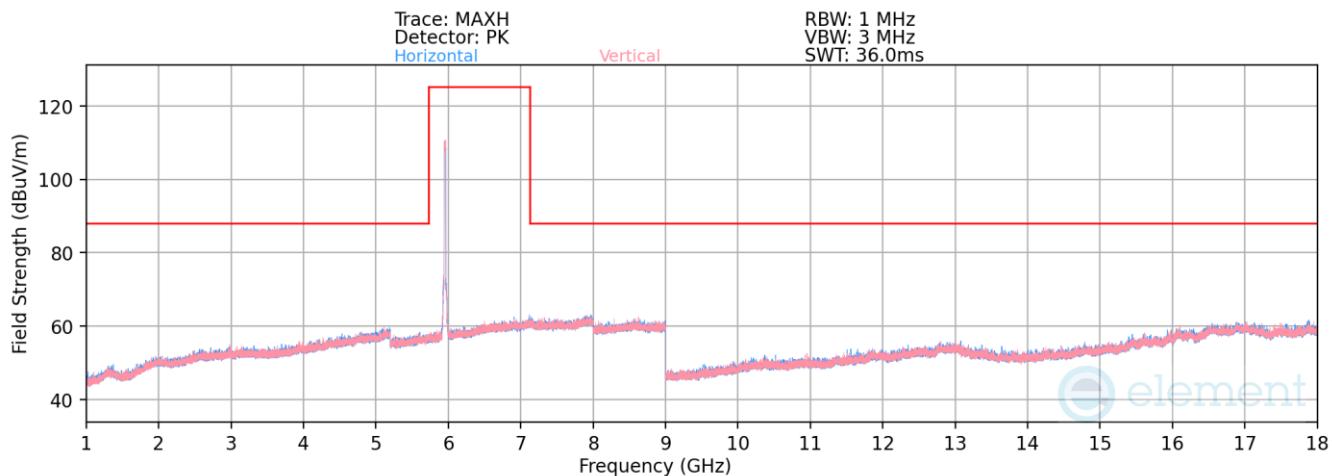


**Plot 7-1213. Radiated Spurious Emissions above 1GHz Antenna 2a (802.11ax – Ch. 1)**

Mode: 802.11ax  
 Data Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5955MHz  
 Channel: 1

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
* 11910.00	Average	H	-	-	-85.69	19.31	40.62	53.98	-13.36
* 11910.00	Peak	H	-	-	-74.61	19.31	51.70	73.98	-22.28
* 17865.00	Average	V	-	-	-86.39	26.60	46.03	53.98	-7.95
* 17865.00	Peak	V	-	-	-75.24	26.60	57.16	73.98	-16.82

**Table 7-189. Radiated Spurious Emission Measurements Antenna 2a**

FCC ID: BCGA2837 IC: 579C-A2837	 <b>element</b> <b>MEASUREMENT REPORT (CERTIFICATION)</b>				Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device			

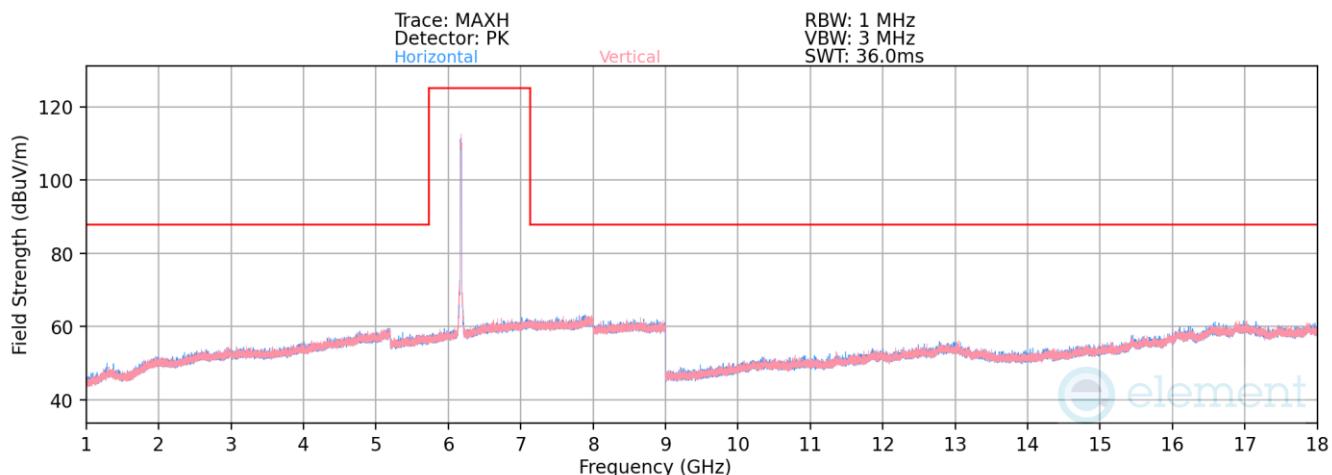


Plot 7-1214. Radiated Spurious Emissions above 1GHz Antenna 2a (802.11ax – Ch. 45, MCS0)

Mode: 802.11ax  
 Data Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 6175MHz  
 Channel: 45

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
* 12350.00	Peak	V	-	-	-74.60	20.83	53.23	73.98	-20.75
* 12350.00	Average	V	-	-	-86.18	21.02	41.84	53.98	-12.14

Table 7-190. Radiated Spurious Emission Measurements Antenna 2a

FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device			

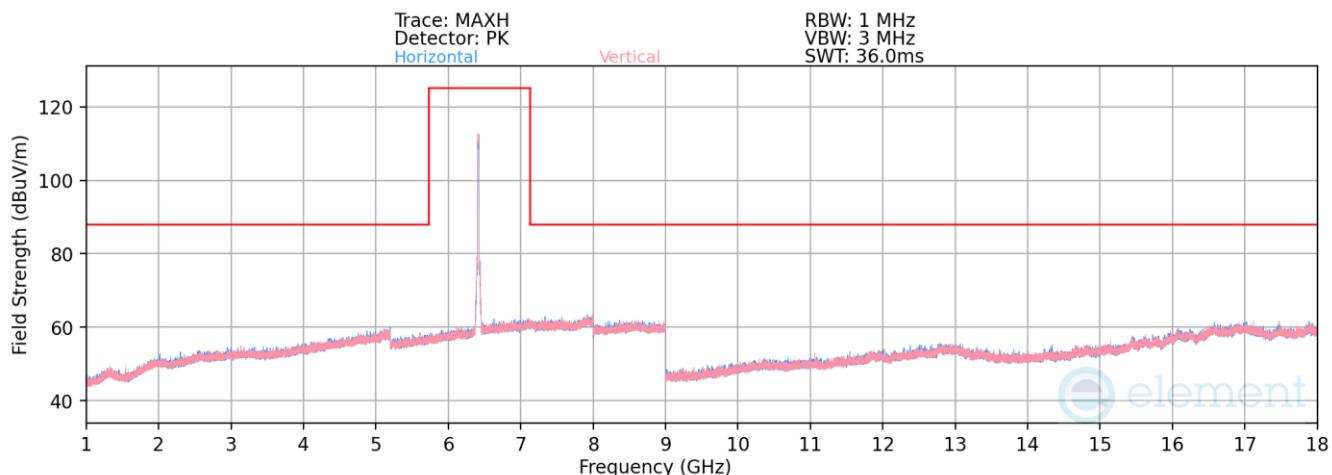

**Plot 7-1215. Radiated Spurious Emissions above 1GHz Antenna 2a (802.11ax – Ch. 93)**

Mode: 802.11ax  
 Data Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 6415MHz  
 Channel: 93

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
12830.00	Average	V	-	-	-85.60	22.26	43.66	68.20	-24.54
12830.00	Peak	V	-	-	-74.11	22.26	55.15	88.23	-33.08

**Table 7-191. Radiated Spurious Emission Measurements Antenna 2a**

FCC ID: BCGA2837 IC: 579C-A2837	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 380 of 510