






Plot 7-210. 6dB BW & 99% OBW Antenna WF5b (20MHz BW 802.11n – Ch. 157, MCS7)

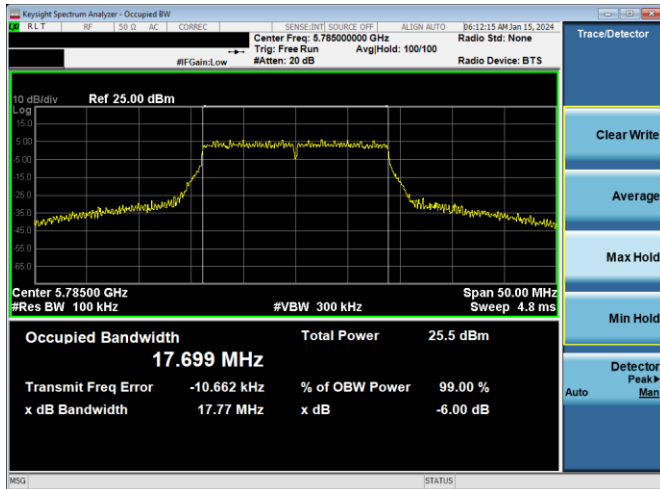


Plot 7-213. 6dB BW & 99% OBW Antenna WF5b (40MHz BW 802.11ax(SU) – Ch. 151, MCS11)

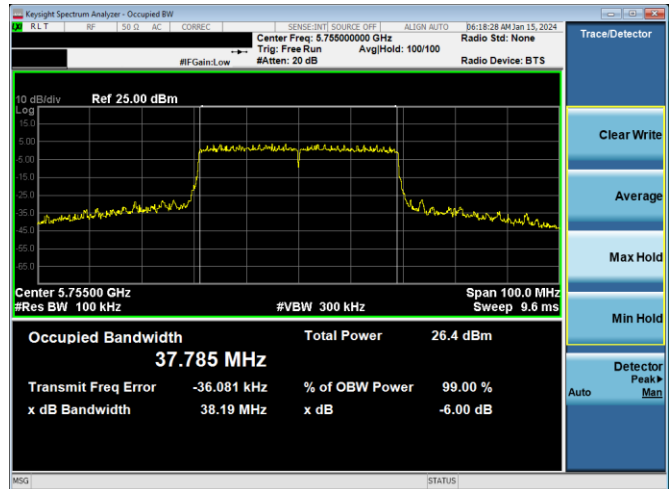


Plot 7-211. 6dB BW & 99% OBW Antenna WF5b (20MHz BW 802.11ax(SU) – Ch. 157, MCS11)

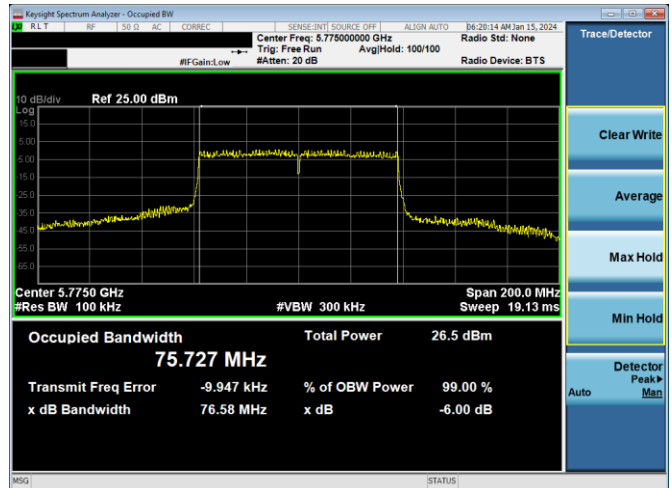

Plot 7-214. 6dB BW & 99% OBW Antenna WF5b (80MHz BW 802.11ac – Ch. 155, MCS9)

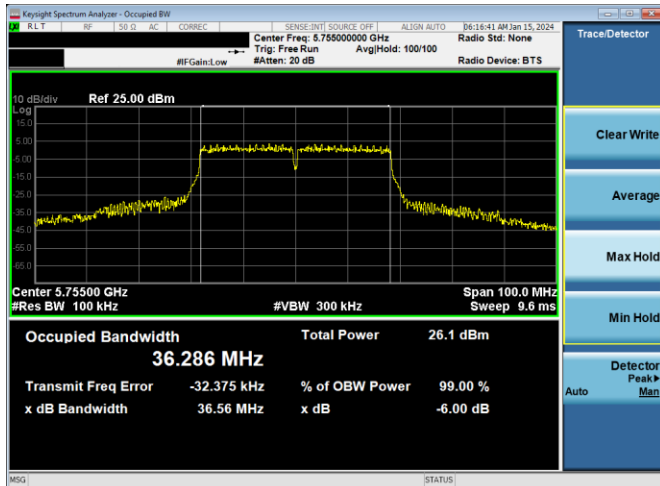

Plot 7-212. 6dB BW & 99% OBW Antenna WF5b (40MHz BW 802.11n – Ch. 151, MCS7)

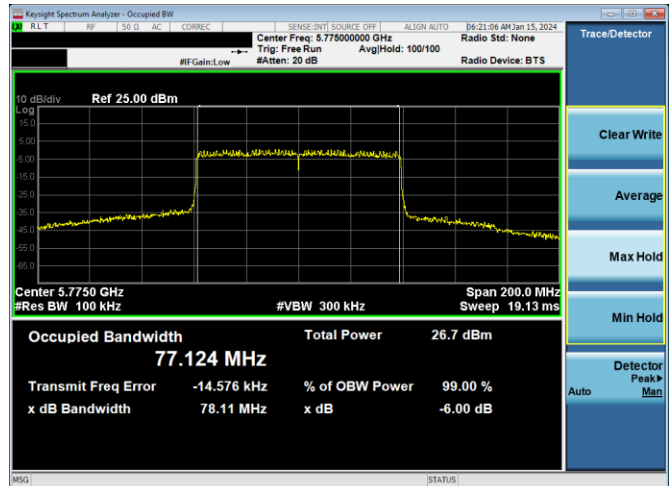

Plot 7-215. 6dB BW & 99% OBW Antenna WF5b (80MHz BW 802.11ax(SU) – Ch. 155, MCS11)

FCC ID: BCGA2837 IC: 579C-A2837	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 69 of 577

7.3.1 Antenna 4a 6dB & 99% Bandwidth Measurements

	Frequency [MHz]	Channel	802.11 MODE	Data Rate [Mbps]	Measured 99% Occupied Bandwidth [MHz]	Measured 6dB Bandwidth [MHz]	Minimum 6dB Bandwidth [MHz]	Pass / Fail
Band 3	5745	149	n (20MHz)	19.5/21.7 (MCS2)	17.61	17.32	0.50	Pass
	5785	157	n (20MHz)	19.5/21.7 (MCS2)	17.61	17.54	0.50	Pass
	5825	165	n (20MHz)	19.5/21.7 (MCS2)	17.63	17.63	0.50	Pass
	5745	149	ax (SU) (20MHz)	24/25.8 (MCS2)	18.95	19.10	0.50	Pass
	5785	157	ax (SU) (20MHz)	24/25.8 (MCS2)	18.95	19.10	0.50	Pass
	5825	165	ax (SU) (20MHz)	24/25.8 (MCS2)	18.94	19.07	0.50	Pass
	5755	151	n (40MHz)	40/40.5 (MCS2)	36.03	35.32	0.50	Pass
	5795	159	n (40MHz)	40/40.5 (MCS2)	36.02	35.91	0.50	Pass
	5755	151	ax (SU) (40MHz)	49/51.6 (MCS2)	37.79	38.19	0.50	Pass
	5795	159	ax (SU) (40MHz)	49/51.6 (MCS2)	37.81	38.19	0.50	Pass
	5775	155	ac (80MHz)	87.8/97.5 (MCS2)	75.33	75.66	0.50	Pass
	5775	155	ax (SU) (80MHz)	102/108.1 (MCS2)	77.02	78.01	0.50	Pass

Table 7-14. Conducted Bandwidth Measurements Antenna 4a (Low Data Rate)

	Frequency [MHz]	Channel	802.11 MODE	Data Rate [Mbps]	Measured 99% Occupied Bandwidth [MHz]	Measured 6dB Bandwidth [MHz]	Minimum 6dB Bandwidth [MHz]	Pass / Fail
Band 3	5745	149	n (20MHz)	39/43.3 (MCS4)	17.63	17.73	0.50	Pass
	5785	157	n (20MHz)	39/43.3 (MCS4)	17.62	17.72	0.50	Pass
	5825	165	n (20MHz)	39/43.3 (MCS4)	17.61	17.69	0.50	Pass
	5745	149	ax (SU) (20MHz)	49/51.6 (MCS4)	18.95	19.15	0.50	Pass
	5785	157	ax (SU) (20MHz)	49/51.6 (MCS4)	18.97	19.12	0.50	Pass
	5825	165	ax (SU) (20MHz)	49/51.6 (MCS4)	18.94	19.12	0.50	Pass
	5755	151	n (40MHz)	81/90 (MCS4)	36.06	36.44	0.50	Pass
	5795	159	n (40MHz)	81/90 (MCS4)	36.10	36.42	0.50	Pass
	5755	151	ax (SU) (40MHz)	98/103.2 (MCS4)	37.83	38.23	0.50	Pass
	5795	159	ax (SU) (40MHz)	98/103.2 (MCS4)	37.85	38.23	0.50	Pass
	5775	155	ac (80MHz)	175.5/195 (MCS4)	75.37	76.45	0.50	Pass
	5775	155	ax (SU) (80MHz)	204/216.2 (MCS4)	76.99	78.03	0.50	Pass


Table 7-15. Conducted Bandwidth Measurements Antenna 4a (Mid Data Rate)

	Frequency [MHz]	Channel	802.11 MODE	Data Rate [Mbps]	Measured 99% Occupied Bandwidth [MHz]	Measured 6dB Bandwidth [MHz]	Minimum 6dB Bandwidth [MHz]	Pass / Fail
Band 3	5745	149	n (20MHz)	65/72.2 (MCS7)	17.69	17.79	0.50	Pass
	5785	157	n (20MHz)	65/72.2 (MCS7)	17.71	17.80	0.50	Pass
	5825	165	n (20MHz)	65/72.2 (MCS7)	17.70	17.78	0.50	Pass
	5745	149	ax (SU) (20MHz)	135/143.4 (MCS11)	18.97	19.14	0.50	Pass
	5785	157	ax (SU) (20MHz)	135/143.4 (MCS11)	18.97	19.10	0.50	Pass
	5825	165	ax (SU) (20MHz)	135/143.4 (MCS11)	18.96	19.11	0.50	Pass
	5755	151	n (40MHz)	135/150 (MCS7)	36.27	36.57	0.50	Pass
	5795	159	n (40MHz)	135/150 (MCS7)	36.27	36.55	0.50	Pass
	5755	151	ax (SU) (40MHz)	271/286 (MCS11)	37.85	38.25	0.50	Pass
	5795	159	ax (SU) (40MHz)	271/286 (MCS11)	37.82	38.22	0.50	Pass
	5775	155	ac (80MHz)	390/433.3 (MCS9)	75.68	76.58	0.50	Pass
	5775	155	ax (SU) (80MHz)	567/600.5 (MCS11)	77.03	78.10	0.50	Pass


Table 7-16. Conducted Bandwidth Measurements Antenna 4a (High Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 70 of 577


V 10.5 12/15/2021

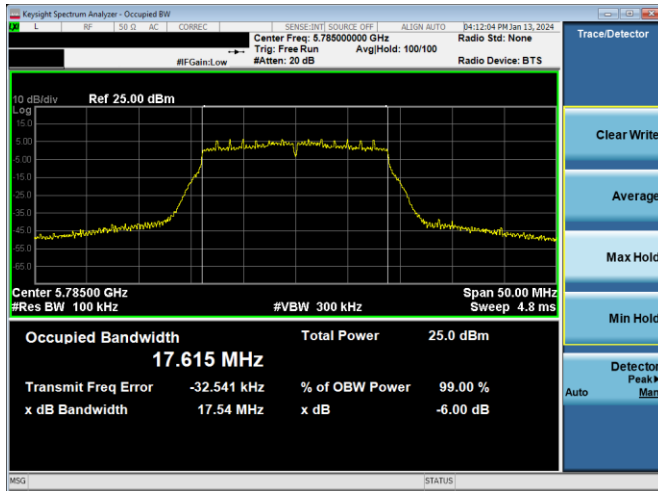


Plot 7-216. 6dB BW & 99% OBW Antenna 4a (20MHz BW 802.11n – Ch. 157, MCS2)

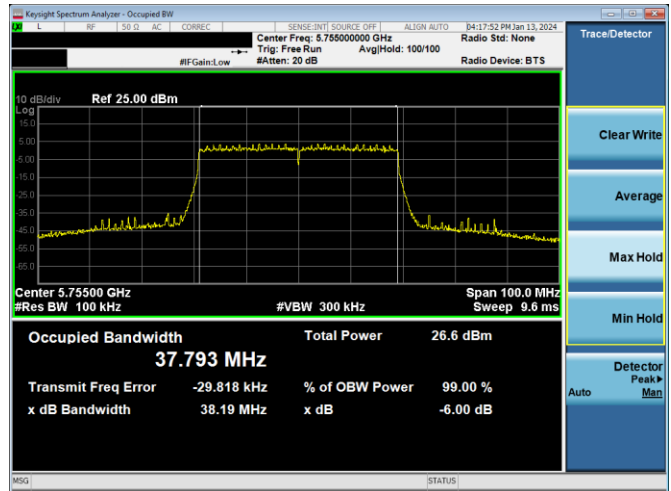


Plot 7-219. 6dB BW & 99% OBW Antenna 4a (40MHz BW 802.11ax(SU) – Ch. 151, MCS2)

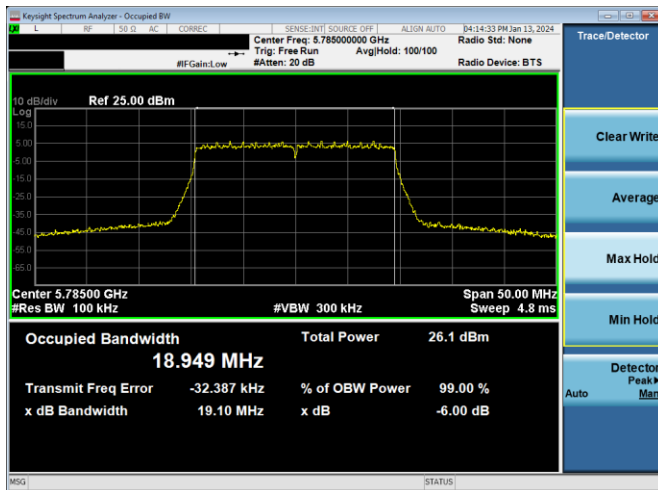


Plot 7-217. 6dB BW & 99% OBW Antenna 4a (20MHz BW 802.11ax(SU) – Ch. 157, MCS2)

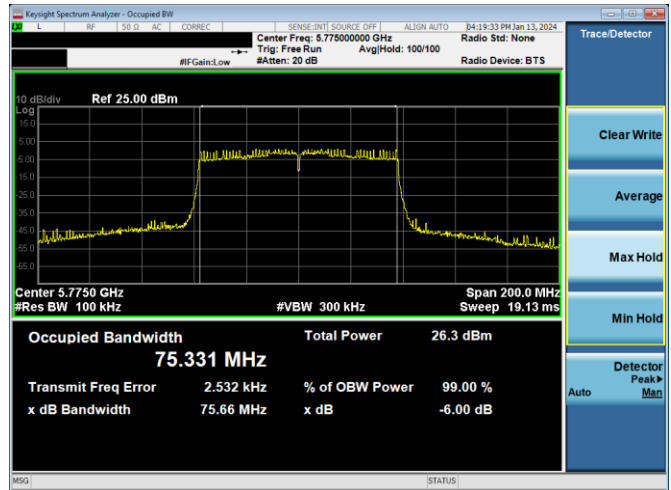

Plot 7-220. 6dB BW & 99% OBW Antenna 4a (80MHz BW 802.11ac – Ch. 155, MCS2)

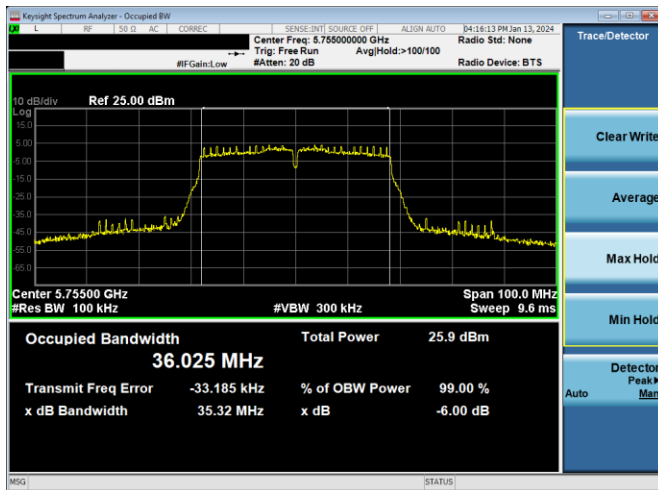


Plot 7-218. 6dB BW & 99% OBW Antenna 4a (40MHz BW 802.11n – Ch. 151, MCS2)

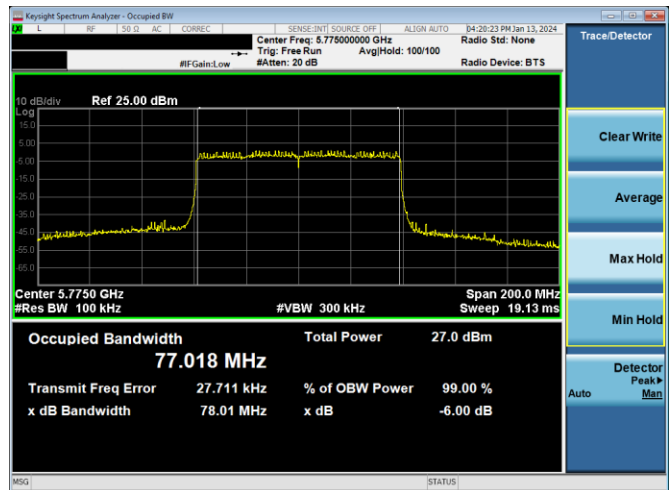


Plot 7-221. 6dB BW & 99% OBW Antenna 4a (80MHz BW 802.11ax(SU) – Ch. 155, MCS2)

FCC ID: BCGA2837 IC: 579C-A2837	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 71 of 577

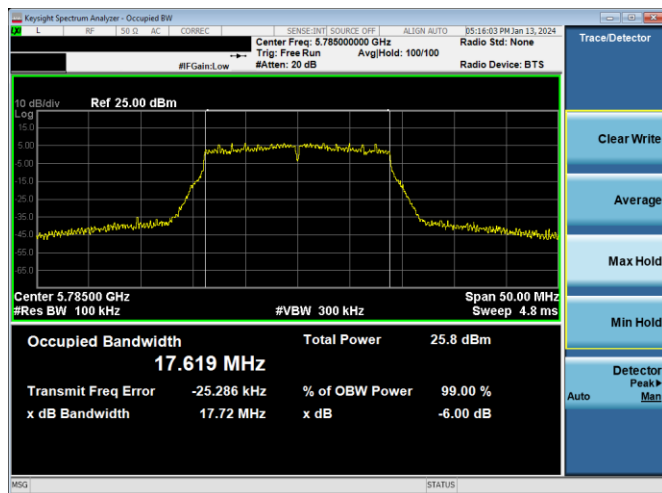


Plot 7-222. 6dB BW & 99% OBW Antenna 4a (20MHz BW 802.11n – Ch. 157, MCS4)

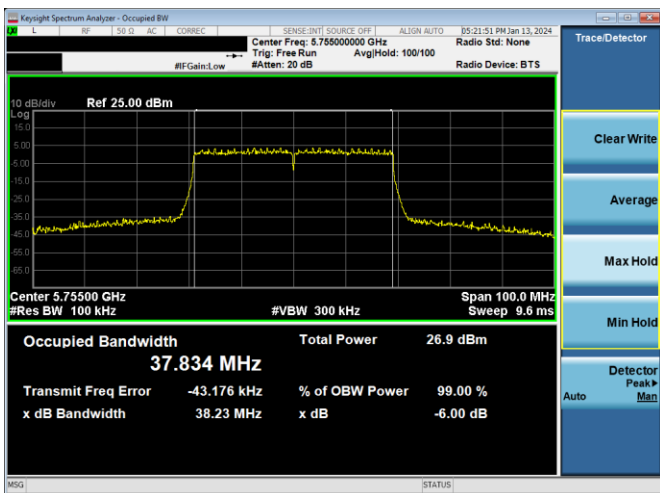


Plot 7-225. 6dB BW & 99% OBW Antenna 4a (40MHz BW 802.11ax(SU) – Ch. 151, MCS4)




Plot 7-223. 6dB BW & 99% OBW Antenna 4a (20MHz BW 802.11ax(SU) – Ch. 157, MCS4)

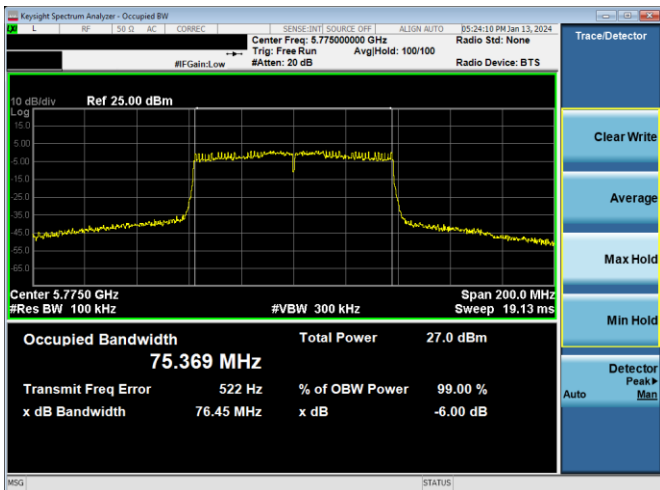

Plot 7-226. 6dB BW & 99% OBW Antenna 4a (80MHz BW 802.11ac – Ch. 155, MCS4)

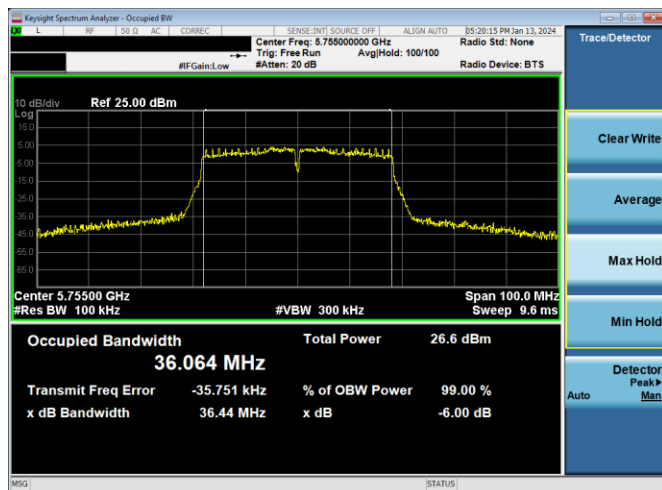


Plot 7-224. 6dB BW & 99% OBW Antenna 4a (40MHz BW 802.11n – Ch. 151, MCS4)

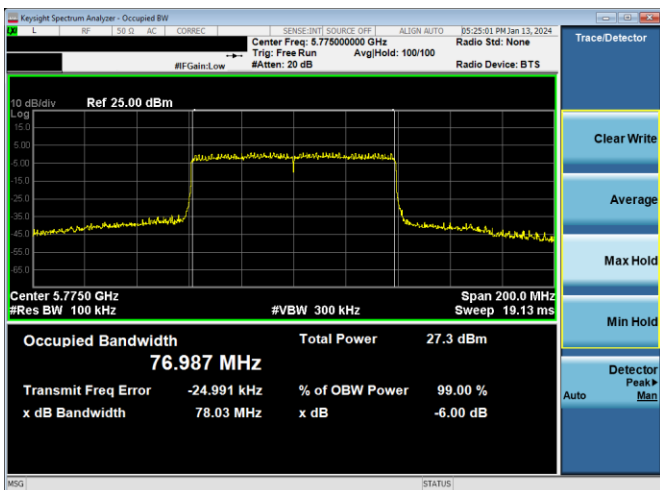


Plot 7-227. 6dB BW & 99% OBW Antenna 4a (80MHz BW 802.11ax(SU) – Ch. 155, MCS4)


FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 72 of 577

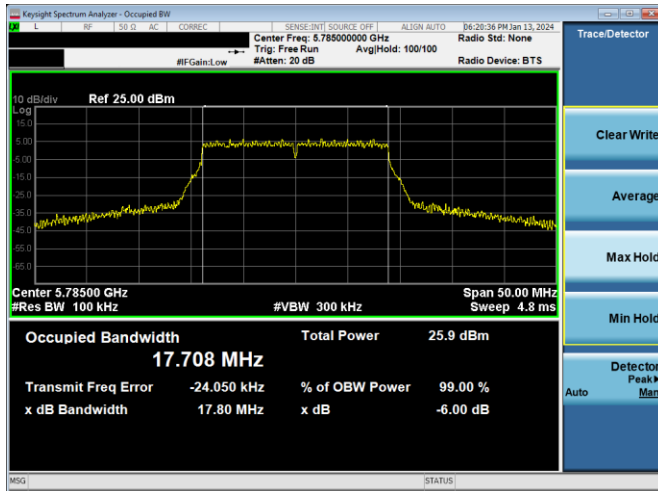


Plot 7-228. 6dB BW & 99% OBW Antenna 4a (20MHz BW 802.11n – Ch. 157, MCS7)

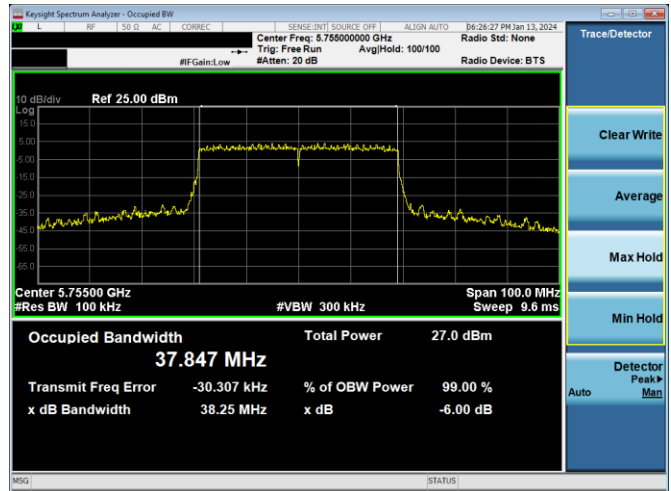


Plot 7-231. 6dB BW & 99% OBW Antenna 4a (40MHz BW 802.11ax(SU) – Ch. 151, MCS11)

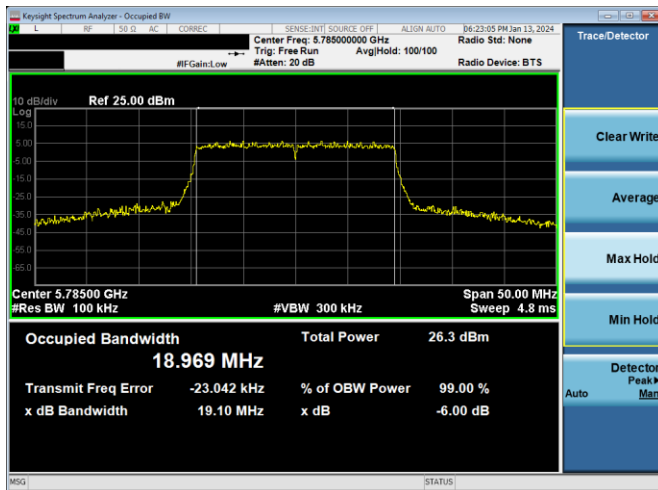


Plot 7-229. 6dB BW & 99% OBW Antenna 4a (20MHz BW 802.11ax(SU) – Ch. 157, MCS11)

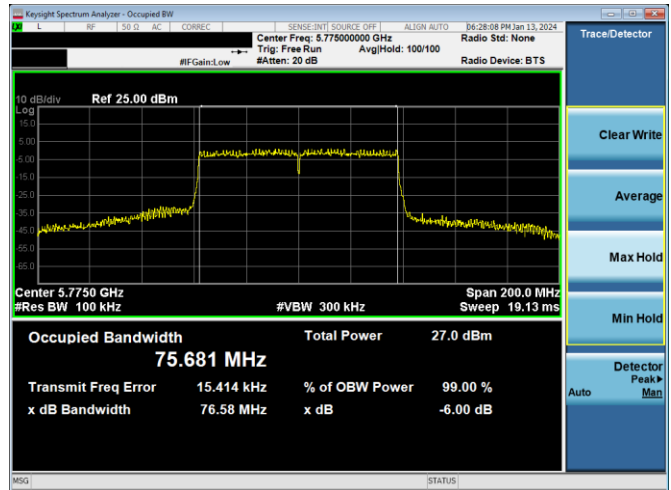

Plot 7-232. 6dB BW & 99% OBW Antenna 4a (80MHz BW 802.11ac – Ch. 155, MCS9)

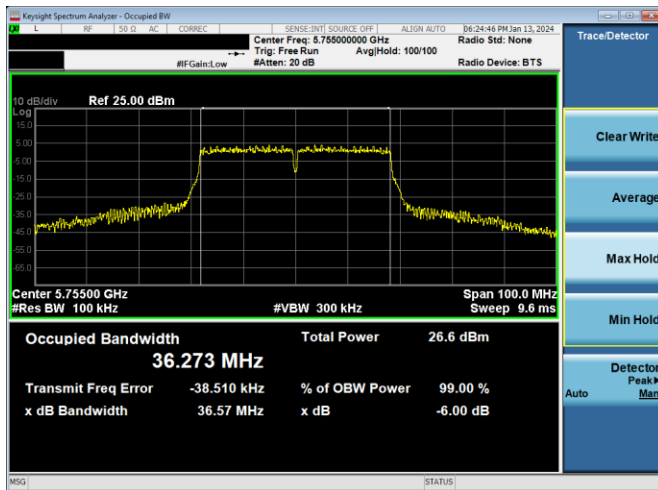

Plot 7-230. 6dB BW & 99% OBW Antenna 4a (40MHz BW 802.11n – Ch. 151, MCS7)

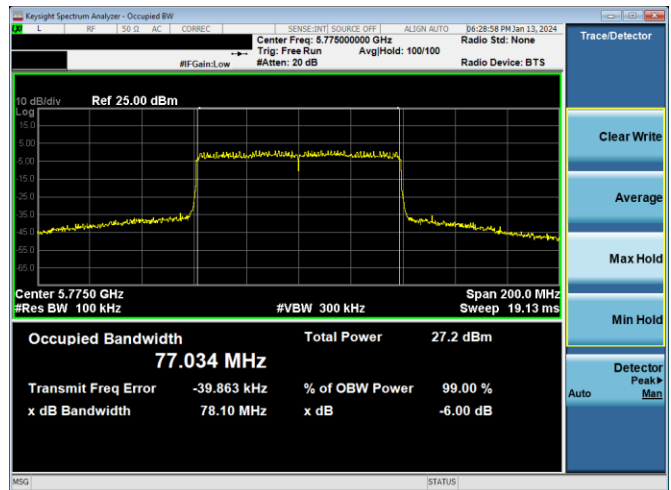

Plot 7-233. 6dB BW & 99% OBW Antenna 4a (80MHz BW 802.11ax(SU) – Ch. 155, MCS11)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 73 of 577

7.3.2 Antenna 2a 6dB & 99% Bandwidth Measurements

	Frequency [MHz]	Channel	802.11 MODE	Data Rate [Mbps]	Measured 99% Occupied Bandwidth [MHz]	Measured 6dB Bandwidth [MHz]	Minimum 6dB Bandwidth [MHz]	Pass / Fail
Band 3	5745	149	n (20MHz)	19.5/21.7 (MCS2)	17.62	17.60	0.50	Pass
	5785	157	n (20MHz)	19.5/21.7 (MCS2)	17.61	17.62	0.50	Pass
	5825	165	n (20MHz)	19.5/21.7 (MCS2)	17.62	17.60	0.50	Pass
	5745	149	ax (SU) (20MHz)	24/25.8 (MCS2)	18.93	19.06	0.50	Pass
	5785	157	ax (SU) (20MHz)	24/25.8 (MCS2)	18.95	19.06	0.50	Pass
	5825	165	ax (SU) (20MHz)	24/25.8 (MCS2)	18.95	19.10	0.50	Pass
	5755	151	n (40MHz)	40/40.5 (MCS2)	36.02	35.72	0.50	Pass
	5795	159	n (40MHz)	40/40.5 (MCS2)	36.04	35.80	0.50	Pass
	5755	151	ax (SU) (40MHz)	49/51.6 (MCS2)	37.78	38.15	0.50	Pass
	5795	159	ax (SU) (40MHz)	49/51.6 (MCS2)	37.85	38.23	0.50	Pass
	5775	155	ac (80MHz)	87.8/97.5 (MCS2)	75.32	75.62	0.50	Pass
	5775	155	ax (SU) (80MHz)	102/108.1 (MCS2)	76.96	77.97	0.50	Pass

Table 7-17. Conducted Bandwidth Measurements Antenna 2a (Low Data Rate)


	Frequency [MHz]	Channel	802.11 MODE	Data Rate [Mbps]	Measured 99% Occupied Bandwidth [MHz]	Measured 6dB Bandwidth [MHz]	Minimum 6dB Bandwidth [MHz]	Pass / Fail
Band 3	5745	149	n (20MHz)	39/43.3 (MCS4)	17.62	17.70	0.50	Pass
	5785	157	n (20MHz)	39/43.3 (MCS4)	17.62	17.70	0.50	Pass
	5825	165	n (20MHz)	39/43.3 (MCS4)	17.61	17.69	0.50	Pass
	5745	149	ax (SU) (20MHz)	49/51.6 (MCS4)	18.95	19.11	0.50	Pass
	5785	157	ax (SU) (20MHz)	49/51.6 (MCS4)	18.97	19.12	0.50	Pass
	5825	165	ax (SU) (20MHz)	49/51.6 (MCS4)	18.98	19.12	0.50	Pass
	5755	151	n (40MHz)	81/90 (MCS4)	36.09	36.40	0.50	Pass
	5795	159	n (40MHz)	81/90 (MCS4)	36.09	36.43	0.50	Pass
	5755	151	ax (SU) (40MHz)	98/103.2 (MCS4)	37.84	38.22	0.50	Pass
	5795	159	ax (SU) (40MHz)	98/103.2 (MCS4)	37.81	38.20	0.50	Pass
	5775	155	ac (80MHz)	175.5/195 (MCS4)	75.43	76.48	0.50	Pass
	5775	155	ax (SU) (80MHz)	204/216.2 (MCS4)	77.06	78.03	0.50	Pass

Table 7-18. Conducted Bandwidth Measurements Antenna 2a (Mid Data Rate)


	Frequency [MHz]	Channel	802.11 MODE	Data Rate [Mbps]	Measured 99% Occupied Bandwidth [MHz]	Measured 6dB Bandwidth [MHz]	Minimum 6dB Bandwidth [MHz]	Pass / Fail
Band 3	5745	149	n (20MHz)	65/72.2 (MCS7)	17.70	17.77	0.50	Pass
	5785	157	n (20MHz)	65/72.2 (MCS7)	17.71	17.80	0.50	Pass
	5825	165	n (20MHz)	65/72.2 (MCS7)	17.70	17.78	0.50	Pass
	5745	149	ax (SU) (20MHz)	135/143.4 (MCS11)	18.97	19.10	0.50	Pass
	5785	157	ax (SU) (20MHz)	135/143.4 (MCS11)	19.00	19.14	0.50	Pass
	5825	165	ax (SU) (20MHz)	135/143.4 (MCS11)	18.97	19.11	0.50	Pass
	5755	151	n (40MHz)	135/150 (MCS7)	36.27	36.54	0.50	Pass
	5795	159	n (40MHz)	135/150 (MCS7)	36.28	36.57	0.50	Pass
	5755	151	ax (SU) (40MHz)	271/286 (MCS11)	37.81	38.21	0.50	Pass
	5795	159	ax (SU) (40MHz)	271/286 (MCS11)	37.85	38.22	0.50	Pass
	5775	155	ac (80MHz)	390/433.3 (MCS9)	75.71	76.58	0.50	Pass
	5775	155	ax (SU) (80MHz)	567/600.5 (MCS11)	77.05	78.00	0.50	Pass

Table 7-19. Conducted Bandwidth Measurements Antenna 2a (High Data Rate)


FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 74 of 577

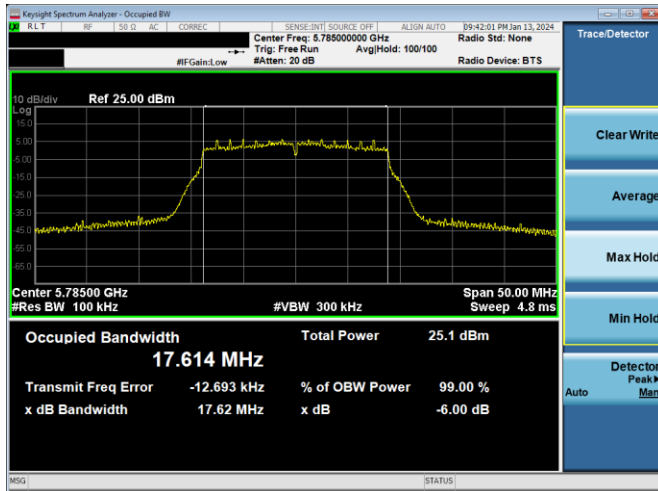


Plot 7-234. 6dB BW & 99% OBW Antenna 2a (20MHz BW 802.11n – Ch. 157, MCS2)

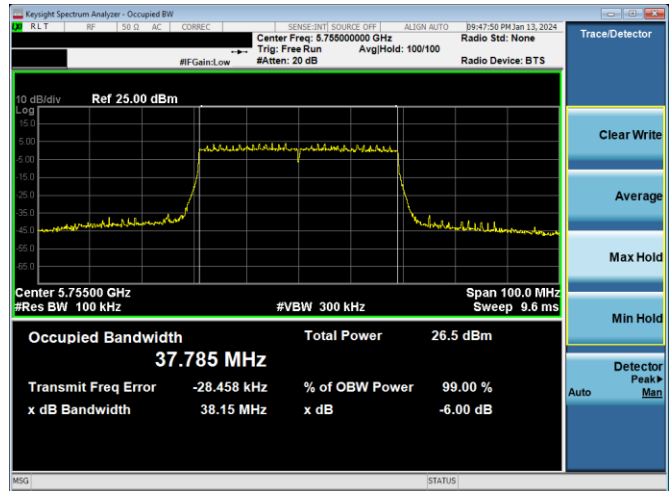


Plot 7-237. 6dB BW & 99% OBW Antenna 2a (40MHz BW 802.11ax(SU) – Ch. 151, MCS2)

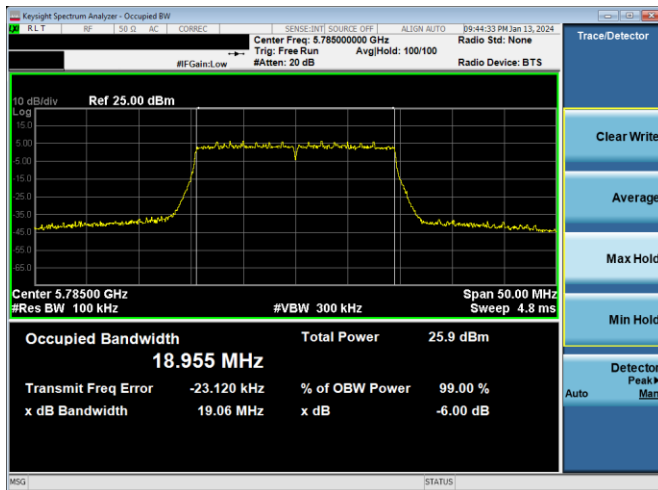


Plot 7-235. 6dB BW & 99% OBW Antenna 2a (20MHz BW 802.11ax(SU) – Ch. 157, MCS2)

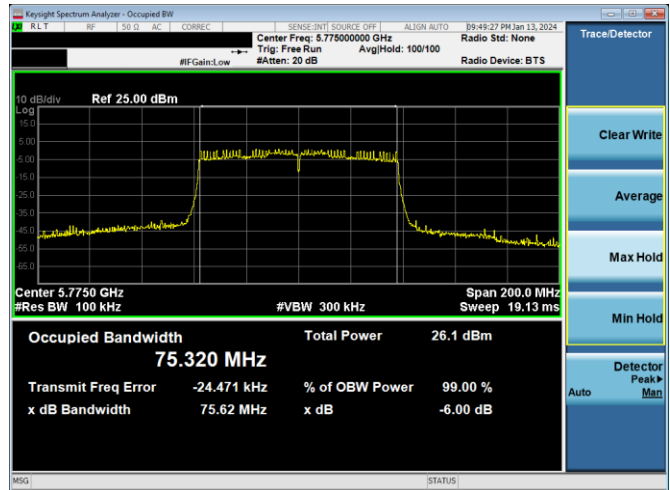

Plot 7-238. 6dB BW & 99% OBW Antenna 2a (80MHz BW 802.11ac – Ch. 155, MCS2)

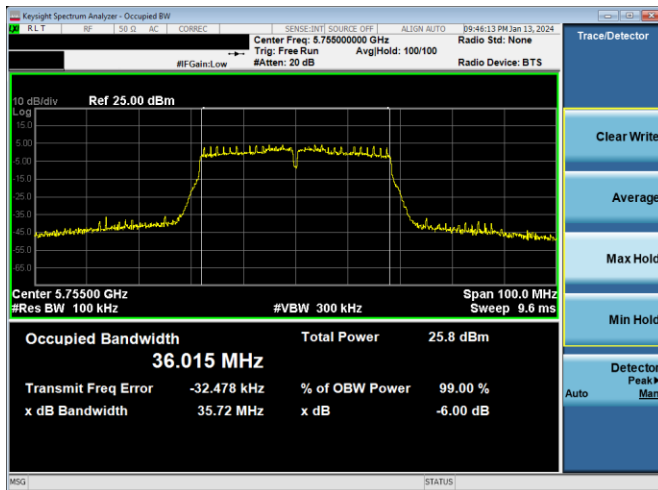

Plot 7-236. 6dB BW & 99% OBW Antenna 2a (40MHz BW 802.11n – Ch. 151, MCS2)

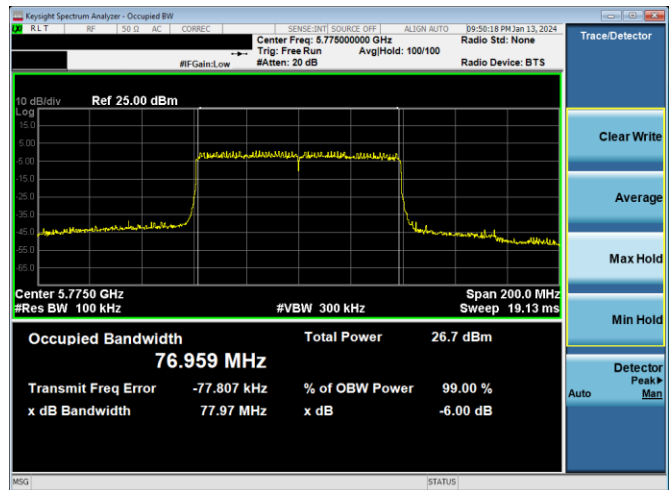


Plot 7-239. 6dB BW & 99% OBW Antenna 2a (80MHz BW 802.11ax(SU) – Ch. 155, MCS2)


FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 75 of 577

V 10.5 12/15/2021


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

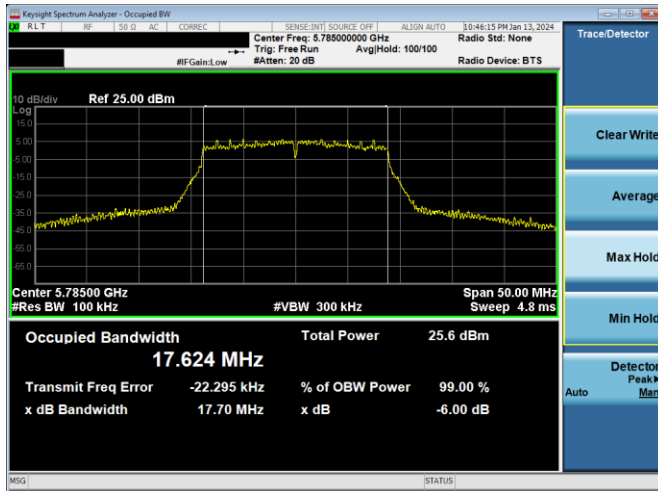

Plot 7-240. 6dB BW & 99% OBW Antenna 2a (20MHz BW 802.11n – Ch. 157, MCS4)

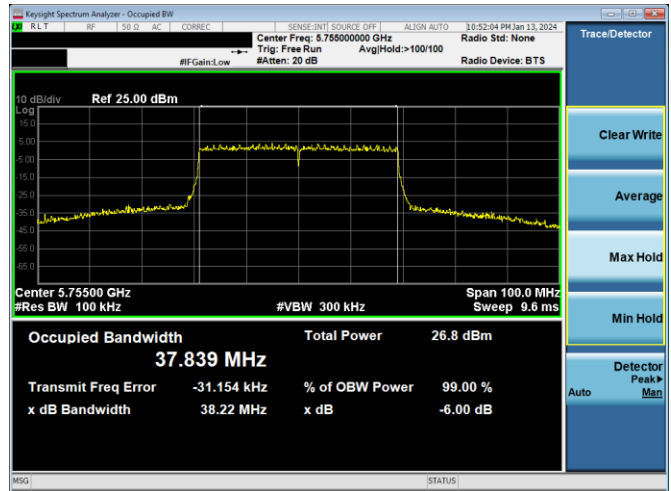

Plot 7-243. 6dB BW & 99% OBW Antenna 2a (40MHz BW 802.11ax(SU) – Ch. 151, MCS4)

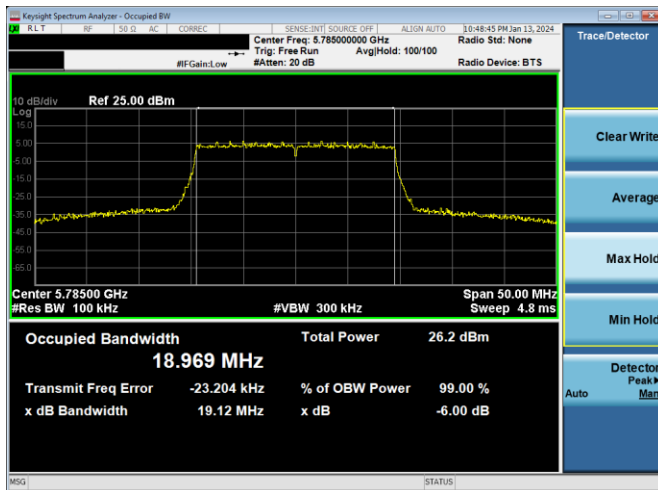


Plot 7-241. 6dB BW & 99% OBW Antenna 2a (20MHz BW 802.11ax(SU) – Ch. 157, MCS4)



Plot 7-244. 6dB BW & 99% OBW Antenna 2a (80MHz BW 802.11ac – Ch. 155, MCS4)




Plot 7-242. 6dB BW & 99% OBW Antenna 2a (40MHz BW 802.11n – Ch. 151, MCS4)

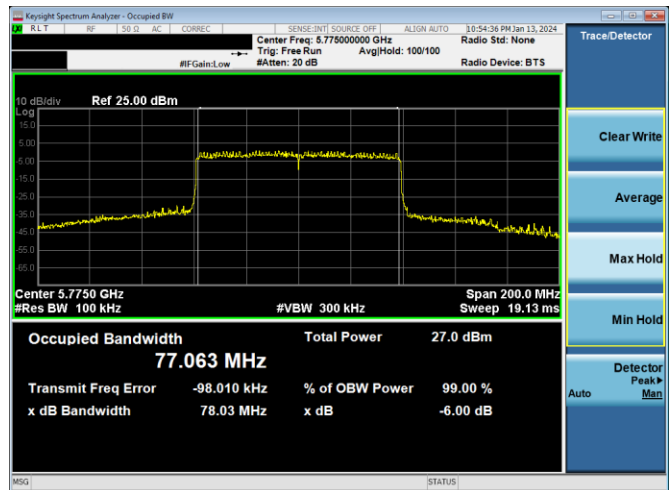

Plot 7-245. 6dB BW & 99% OBW Antenna 2a (80MHz BW 802.11ax(SU) – Ch. 155, MCS4)


FCC ID: BCGA2837 IC: 579C-A2837	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 76 of 577

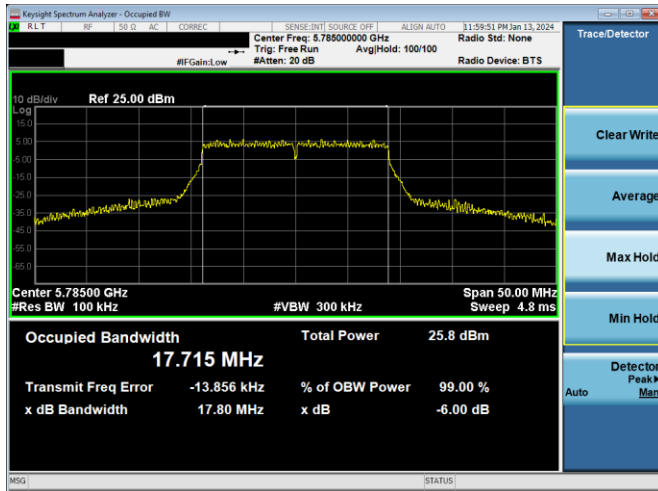

Plot 7-246. 6dB BW & 99% OBW Antenna 2a (20MHz BW 802.11n – Ch. 157, MCS7)




Plot 7-249. 6dB BW & 99% OBW Antenna 2a (40MHz BW 802.11ax(SU) – Ch. 151, MCS11)

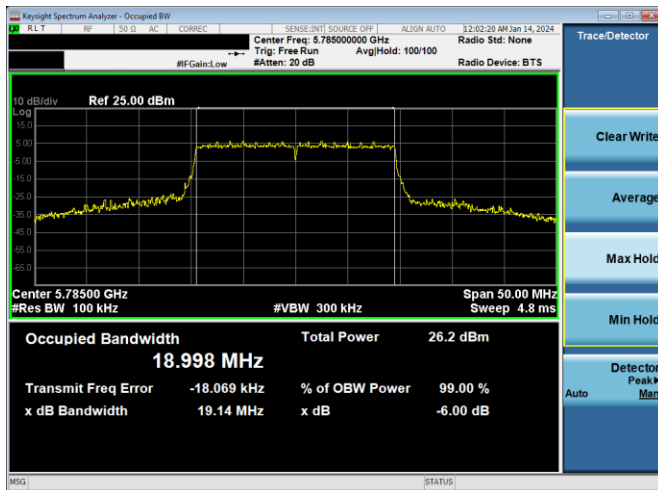


Plot 7-247. 6dB BW & 99% OBW Antenna 2a (20MHz BW 802.11ax(SU) – Ch. 157, MCS11)



Plot 7-250. 6dB BW & 99% OBW Antenna 2a (80MHz BW 802.11ac – Ch. 155, MCS9)

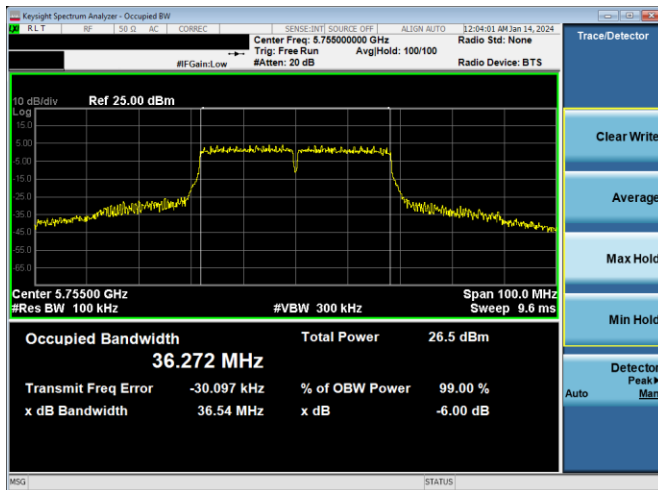

Plot 7-248. 6dB BW & 99% OBW Antenna 2a (40MHz BW 802.11n – Ch. 151, MCS7)

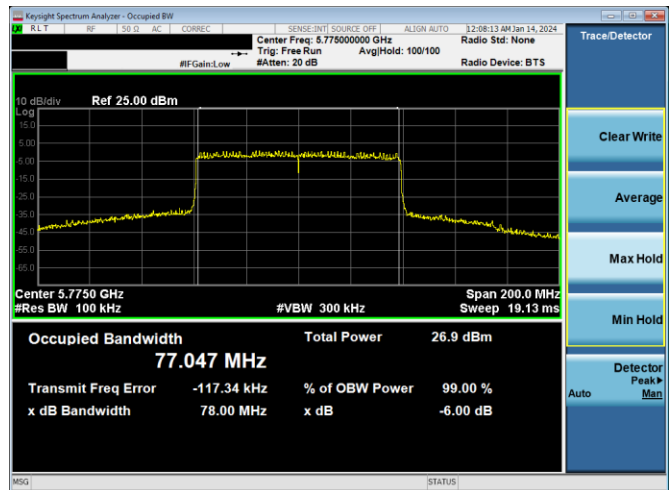

Plot 7-251. 6dB BW & 99% OBW Antenna 2a (80MHz BW 802.11ax(SU) – Ch. 155, MCS11)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 77 of 577

7.4 Conducted Output Power and Max EIRP Measurement – 802.11a/n/ac/ax(SU)

§15.407(a.1.iv) §15.407(a.2) §15.407(a.3); RSS-247 [6.2]

Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. B is the 99% OBW per ISED RSS-247 and 26dB BW is per FCC 15.407.

In the 5.15 – 5.25GHz band, the maximum permissible conducted output power is 250mW (23.98dBm). The maximum e.i.r.p. shall not exceed the lesser of 200 mW or $10 + 10 \log_{10}B$, dBm.

In the 5.25 – 5.35GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) or $11 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 11 \text{ dBm} + 10\log_{10}(20.66) = 24.15\text{dBm}$. The maximum e.i.r.p. shall not exceed the lesser of 1.0 W or $17 + 10 \log_{10}B$, dBm.

In the 5.47 – 5.725GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) or $11 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 11 \text{ dBm} + 10\log_{10}(20.71) = 24.16 \text{ dBm}$. The maximum e.i.r.p. shall not exceed the lesser of 1.0 W or $17 + 10 \log_{10}B$, dBm.

In the 5.725 – 5.850GHz band, the maximum permissible conducted output power is 1W (30dBm). The maximum e.i.r.p. is 36 dBm.

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.3.2 Method PM-G
KDB 789033 D02 v02r01 – Section E3)b) Method PM-G
ANSI C63.10-2013 – Section 14.2 Measure-and-Sum Technique
KDB 662911 v02r01 – Section E1) Measure-and-Sum Technique

Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup

Test Notes

- Per RSS-247 Section 6.2.3, transmission on channels which overlap the 5600-5650 MHz is prohibited. This device operates under these frequencies only under the control of a certified master device and does not support active scanning on these channels. This device does not transmit any beacons or initiate any transmissions in UNII Bands 2A or 2C.

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 78 of 577

V 10.5 12/15/2021

7.4.1 FCC Antenna WF5B Conducted Output Power Measurements

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
			802.11a	802.11n	802.11ax		
	5180	36	17.53	17.62	16.92	23.98	-6.36
	5200	40	18.23	18.33	18.32	23.98	-5.65
	5240	48	18.25	18.27	18.36	23.98	-5.71
	5260	52	18.41	18.42	18.39	23.98	-5.56
	5300	60	18.42	18.43	18.46	23.98	-5.55
	5320	64	18.42	18.45	18.42	23.98	-5.53
	5500	100	17.93	17.97	16.79	23.98	-6.01
	5520	104	18.41	18.25	18.33	23.98	-5.57
	5580	116	18.46	18.47	18.36	23.98	-5.51
	5680	136	18.12	18.37	18.49	23.98	-5.61
	5700	140	17.40	17.47	16.50	23.98	-6.51
	5720	144	18.15	18.23	18.42	23.98	-5.75
	5745	149	18.37	18.42	18.40	30.00	-11.58
	5785	157	18.47	18.38	18.38	30.00	-11.53
	5825	165	18.41	18.39	18.42	30.00	-11.59

Table 7-20. FCC Antenna WF5B 20MHz BW (UNII) Maximum Conducted Output Power (Low Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11a	802.11n	802.11ax		
	5180	36	AVG	16.72	16.73	15.82	23.98	-7.25
	5200	40	AVG	18.47	18.36	18.44	23.98	-5.51
	5240	48	AVG	18.37	18.35	18.36	23.98	-5.61
	5260	52	AVG	18.47	18.46	18.42	23.98	-5.51
	5300	60	AVG	18.39	18.44	18.33	23.98	-5.54
	5320	64	AVG	18.00	17.93	17.43	23.98	-5.98
	5500	100	AVG	16.43	16.37	15.93	23.98	-7.55
	5520	104	AVG	18.36	18.43	17.85	23.98	-5.55
	5540	108	AVG	18.48	18.45	18.42	23.98	-5.50
	5580	116	AVG	18.32	18.42	18.44	23.98	-5.56
	5680	136	AVG	18.42	18.35	18.45	23.98	-5.56
	5700	140	AVG	16.50	16.29	15.48	23.98	-7.48
	5720	144	AVG	18.33	18.41	18.47	23.98	-5.57
	5745	149	AVG	18.29	18.39	18.42	30.00	-11.61
	5785	157	AVG	18.31	18.38	18.43	30.00	-11.62
	5825	165	AVG	18.41	18.36	18.39	30.00	-11.59

Table 7-21. FCC Antenna WF5B 20MHz BW (UNII) Maximum Conducted Output Power (Mid Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 79 of 577

V 10.5 12/15/2021

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11a	802.11n	802.11ax		
	5180	36	AVG	15.86	16.00	15.37	23.98	-7.98
	5200	40	AVG	18.44	18.37	18.40	23.98	-5.54
	5240	48	AVG	18.46	18.47	18.42	23.98	-5.51
	5260	52	AVG	18.47	18.48	18.43	23.98	-5.50
	5300	60	AVG	18.42	18.44	18.40	23.98	-5.54
	5320	64	AVG	16.83	17.00	16.50	23.98	-6.98
	5500	100	AVG	14.44	14.40	14.29	23.98	-9.54
	5520	104	AVG	17.81	17.93	16.78	23.98	-6.05
	5540	108	AVG	18.43	18.40	18.39	23.98	-5.55
	5580	116	AVG	18.35	18.41	18.40	23.98	-5.57
	5680	136	AVG	18.48	18.45	18.35	23.98	-5.50
	5700	140	AVG	14.01	14.13	14.00	23.98	-9.85
	5720	144	AVG	18.50	18.43	18.43	23.98	-5.48
	5745	149	AVG	18.45	18.48	18.48	30.00	-11.52
	5785	157	AVG	18.42	18.44	18.43	30.00	-11.56
	5825	165	AVG	18.40	18.41	18.45	30.00	-11.59

Table 7-22. FCC Antenna WF5B 20MHz BW (UNII) Maximum Conducted Output Power (High Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11n	802.11ax		
	5190	38	AVG	14.43	14.19	23.98	-9.55
	5230	46	AVG	18.42	18.47	23.98	-5.56
	5270	54	AVG	18.39	18.47	23.98	-5.59
	5310	62	AVG	17.25	16.36	23.98	-6.73
	5510	102	AVG	15.50	14.92	23.98	-8.48
	5550	110	AVG	18.48	18.44	23.98	-5.50
	5590	118	AVG	18.46	18.44	23.98	-5.52
	5710	142	AVG	18.47	18.44	23.98	-5.51
	5755	151	AVG	18.50	18.44	30.00	-11.50
	5795	159	AVG	18.45	18.48	30.00	-11.55

Table 7-23. FCC Antenna WF5B 40MHz BW (UNII) Maximum Conducted Output Power (Low Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 80 of 577

V 10.5 12/15/2021

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11n	802.11ax		
	5190	38	AVG	14.19	14.18	23.98	-9.79
	5230	46	AVG	18.41	18.39	23.98	-5.57
	5270	54	AVG	18.41	18.46	23.98	-5.57
	5310	62	AVG	15.94	15.36	23.98	-8.04
	5510	102	AVG	14.49	13.95	23.98	-9.49
	5550	110	AVG	18.49	17.88	23.98	-5.49
	5590	118	AVG	18.46	18.36	23.98	-5.52
	5630	126	AVG	18.45	18.43	23.98	-5.53
	5670	134	AVG	17.96	16.90	23.98	-6.02
	5710	142	AVG	18.50	18.40	23.98	-5.48
	5755	151	AVG	18.43	18.40	30.00	-11.57
	5795	159	AVG	18.37	18.42	30.00	-11.63

Table 7-24. FCC Antenna WF5B 40MHz BW (UNII) Maximum Conducted Output Power (Mid Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11n	802.11ax		
	5190	38	AVG	14.00	13.46	23.98	-9.98
	5230	46	AVG	18.50	18.45	23.98	-5.48
	5270	54	AVG	18.43	18.48	23.98	-5.55
	5310	62	AVG	14.50	14.00	23.98	-9.48
	5510	102	AVG	12.50	12.39	23.98	-11.48
	5550	110	AVG	16.81	16.75	23.98	-7.17
	5590	118	AVG	18.47	18.40	23.98	-5.51
	5630	126	AVG	18.41	18.46	23.98	-5.57
	5670	134	AVG	15.50	15.00	23.98	-8.48
	5710	142	AVG	18.42	18.43	23.98	-5.56
	5755	151	AVG	18.48	18.31	30.00	-11.52
	5795	159	AVG	18.43	18.40	30.00	-11.57

Table 7-25. FCC Antenna WF5B 40MHz BW (UNII) Maximum Conducted Output Power (High Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 81 of 577

V 10.5 12/15/2021

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11ac	802.11ax		
	5210	42	AVG	13.82	14.00	23.98	-10.16
	5290	58	AVG	16.00	16.00	23.98	-7.98
	5530	106	AVG	15.25	14.41	23.98	-8.73
	5610	122	AVG	18.49	18.40	23.98	-5.49
	5690	138	AVG	18.46	18.42	23.98	-5.52
	5775	155	AVG	18.33	17.89	30.00	-11.67

Table 7-26. FCC Antenna WF5B 80MHz BW (UNII) Maximum Conducted Output Power (Low Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11ac	802.11ax		
	5210	42	AVG	13.40	13.38	23.98	-10.58
	5290	58	AVG	14.83	15.00	23.98	-9.15
	5530	106	AVG	13.95	13.34	23.98	-10.03
	5610	122	AVG	18.24	17.29	23.98	-5.74
	5690	138	AVG	18.42	18.44	23.98	-5.56
	5775	155	AVG	18.46	17.21	30.00	-11.54

Table 7-27. FCC Antenna WF5B 80MHz BW (UNII) Maximum Conducted Output Power (Mid Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11ac	802.11ax		
	5210	42	AVG	12.93	12.50	23.98	-11.05
	5290	58	AVG	13.80	13.84	23.98	-10.18
	5530	106	AVG	12.41	12.42	23.98	-11.57
	5610	122	AVG	16.80	16.45	23.98	-7.18
	5690	138	AVG	18.47	18.45	23.98	-5.51
	5775	155	AVG	17.35	16.87	30.00	-12.65

Table 7-28. FCC Antenna WF5B 80MHz BW (UNII) Maximum Conducted Output Power (High Data Rate)

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11ac	802.11ax		
	5250	50	AVG	12.76	12.94	23.98	-11.22
	5570	114	AVG	12.40	12.25	23.98	-11.58

Table 7-29. FCC Antenna WF5B 160MHz BW (UNII) Maximum Conducted Output Power (Low Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 82 of 577

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11ac	802.11ax		
	5250	50	AVG	12.34	12.48	23.98	-11.64
	5570	114	AVG	11.86	11.93	23.98	-12.12

Table 7-30. FCC Antenna WF5B 160MHz BW (UNII) Maximum Conducted Output Power (Mid Data Rate)

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11ac	802.11ax		
	5250	50	AVG	12.00	11.70	23.98	-11.98
	5570	114	AVG	10.81	10.42	23.98	-13.17

Table 7-31. FCC Antenna WF5B 160MHz BW (UNII) Maximum Conducted Output Power (High Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 83 of 577

V 10.5 12/15/2021

7.4.2 ISED Antenna WF5B Conducted Output Power Measurements

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11a	802.11n	802.11ax						
	5180	36	AVG	16.25	16.25	15.96	-	-	2.20	18.45	23.01	-4.56
	5200	40	AVG	16.16	16.25	16.20	-	-	2.20	18.45	23.01	-4.56
	5240	48	AVG	16.20	16.22	16.20	-	-	2.20	18.42	23.01	-4.59
	5260	52	AVG	18.41	18.42	18.39	23.98	-5.56	2.00	20.42	30.00	-9.58
	5300	60	AVG	18.42	18.43	18.46	23.98	-5.55	2.00	20.43	30.00	-9.57
	5320	64	AVG	18.42	18.45	18.42	23.98	-5.53	2.00	20.45	30.00	-9.55
	5500	100	AVG	17.93	17.97	16.79	23.98	-6.01	1.20	19.17	30.00	-10.83
	5520	104	AVG	18.41	18.25	18.33	23.98	-5.57	1.20	19.61	30.00	-10.39
	5580	116	AVG	18.46	18.47	18.36	23.98	-5.51	1.20	19.67	30.00	-10.33
	5680	136	AVG	18.12	18.37	18.49	23.98	-5.61	1.20	19.57	30.00	-10.43
	5700	140	AVG	17.40	17.47	16.50	23.98	-6.51	1.20	18.67	30.00	-11.33
	5720	144	AVG	18.15	18.23	18.42	23.98	-5.75	1.20	19.43	30.00	-10.57
	5745	149	AVG	18.37	18.42	18.40	30.00	-11.58	0.40	18.82	-	-
	5785	157	AVG	18.47	18.38	18.38	30.00	-11.53	0.40	18.87	-	-
	5825	165	AVG	18.41	18.39	18.42	30.00	-11.59	0.40	18.81	-	-

Table 7-32. ISED Antenna WF5B 20MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11a	802.11n	802.11ax						
	5180	36	AVG	16.20	16.01	15.96	-	-	2.20	18.40	23.01	-4.61
	5200	40	AVG	16.12	16.04	16.03	-	-	2.20	18.32	23.01	-4.69
	5240	48	AVG	16.06	16.06	16.03	-	-	2.20	18.26	23.01	-4.75
	5260	52	AVG	18.47	18.46	18.42	23.98	-5.51	2.00	20.47	30.00	-9.53
	5300	60	AVG	18.39	18.44	18.33	23.98	-5.54	2.00	20.44	30.00	-9.56
	5320	64	AVG	18.00	17.93	17.43	23.98	-5.98	2.00	20.00	30.00	-10.00
	5500	100	AVG	16.43	16.37	15.93	23.98	-7.55	1.20	17.63	30.00	-12.37
	5520	104	AVG	18.36	18.43	17.85	23.98	-5.55	1.20	19.63	30.00	-10.37
	5540	108	AVG	18.48	18.45	18.42	23.98	-5.50	1.20	19.68	30.00	-10.32
	5580	116	AVG	18.32	18.42	18.44	23.98	-5.56	1.20	19.62	30.00	-10.38
	5680	136	AVG	18.42	18.35	18.45	23.98	-5.56	1.20	19.62	30.00	-10.38
	5700	140	AVG	16.50	16.29	15.48	23.98	-7.48	1.20	17.70	30.00	-12.30
	5720	144	AVG	18.33	18.41	18.47	23.98	-5.57	1.20	19.61	30.00	-10.39
	5745	149	AVG	18.29	18.39	18.42	30.00	-11.61	0.40	18.79	-	-
	5785	157	AVG	18.31	18.38	18.43	30.00	-11.62	0.40	18.78	-	-
	5825	165	AVG	18.41	18.36	18.39	30.00	-11.59	0.40	18.81	-	-

Table 7-33. ISED Antenna WF5B 20MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 84 of 577

V 10.5 12/15/2021

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11a	802.11n	802.11ax						
	5180	36	AVG	15.78	15.87	15.43	-	-	2.20	18.07	23.01	-4.94
	5200	40	AVG	16.13	16.04	16.25	-	-	2.20	18.33	23.01	-4.68
	5240	48	AVG	16.32	16.25	16.07	-	-	2.20	18.52	23.01	-4.49
	5260	52	AVG	18.47	18.48	18.43	23.98	-5.50	2.00	20.48	30.00	-9.52
	5300	60	AVG	18.42	18.44	18.40	23.98	-5.54	2.00	20.44	30.00	-9.56
	5320	64	AVG	16.83	17.00	16.50	23.98	-6.98	2.00	19.00	30.00	-11.00
	5500	100	AVG	14.44	14.40	14.29	23.98	-9.54	1.20	15.64	30.00	-14.36
	5520	104	AVG	17.81	17.93	16.78	23.98	-6.05	1.20	19.13	30.00	-10.87
	5540	108	AVG	18.43	18.40	18.39	23.98	-5.55	1.20	19.63	30.00	-10.37
	5580	116	AVG	18.35	18.41	18.40	23.98	-5.57	1.20	19.61	30.00	-10.39
	5680	136	AVG	18.48	18.45	18.35	23.98	-5.50	1.20	19.68	30.00	-10.32
	5700	140	AVG	14.01	14.13	14.00	23.98	-9.85	1.20	15.33	30.00	-14.68
	5720	144	AVG	18.50	18.43	18.43	23.98	-5.48	1.20	19.70	30.00	-10.30
	5745	149	AVG	18.45	18.48	18.48	30.00	-11.52	0.40	18.88	-	-
	5785	157	AVG	18.42	18.44	18.43	30.00	-11.56	0.40	18.84	-	-
	5825	165	AVG	18.40	18.41	18.45	30.00	-11.59	0.40	18.81	-	-

Table 7-34. ISED Antenna WF5B 20MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11n	802.11ax						
	5190	38	AVG	14.50	14.14	-	-	2.20	16.70	23.01	-6.31
	5230	46	AVG	18.30	18.41	-	-	2.20	20.50	23.01	-2.51
	5270	54	AVG	18.39	18.47	23.98	-5.59	2.00	20.39	30.00	-9.61
	5310	62	AVG	17.25	16.36	23.98	-6.73	2.00	19.25	30.00	-10.75
	5510	102	AVG	15.50	14.92	23.98	-8.48	1.20	16.70	30.00	-13.30
	5550	110	AVG	18.48	18.44	23.98	-5.50	1.20	19.68	30.00	-10.32
	5590	118	AVG	18.46	18.44	23.98	-5.52	1.20	19.66	30.00	-10.34
	5710	142	AVG	18.47	18.44	23.98	-5.51	1.20	19.67	30.00	-10.33
	5755	151	AVG	18.50	18.44	30.00	-11.50	0.40	18.90	-	-
	5795	159	AVG	18.45	18.48	30.00	-11.55	0.40	18.85	-	-

Table 7-35. ISED Antenna WF5B 40MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11n	802.11ax						
	5190	38	AVG	14.15	14.25	-	-	2.20	16.35	23.01	-6.66
	5230	46	AVG	18.39	18.41	-	-	2.20	20.59	23.01	-2.42
	5270	54	AVG	18.41	18.46	23.98	-5.57	2.00	20.41	30.00	-9.59
	5310	62	AVG	15.94	15.36	23.98	-8.04	2.00	17.94	30.00	-12.06
	5510	102	AVG	14.49	13.95	23.98	-9.49	1.20	15.69	30.00	-14.31
	5550	110	AVG	18.49	17.88	23.98	-5.49	1.20	19.69	30.00	-10.31
	5590	118	AVG	18.46	18.36	23.98	-5.52	1.20	19.66	30.00	-10.34
	5630	126	AVG	18.45	18.43	23.98	-5.53	1.20	19.65	30.00	-10.35
	5670	134	AVG	18.39	16.71	23.98	-5.59	1.20	19.59	30.00	-10.41
	5710	142	AVG	18.50	18.40	23.98	-5.48	1.20	19.70	30.00	-10.30
	5755	151	AVG	18.43	18.40	30.00	-11.57	0.40	18.83	-	-
	5795	159	AVG	18.37	18.42	30.00	-11.63	0.40	18.77	-	-

Table 7-36. ISED Antenna WF5B 40MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 85 of 577

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11n	802.11ax						
	5190	38	AVG	13.85	13.50	-	-	2.20	16.05	23.01	-6.96
	5230	46	AVG	18.43	18.46	-	-	2.20	20.63	23.01	-2.38
	5270	54	AVG	18.44	18.38	23.98	-5.54	2.00	20.44	30.00	-9.56
	5310	62	AVG	14.50	14.00	23.98	-9.48	2.00	16.50	30.00	-13.50
	5510	102	AVG	12.50	12.39	23.98	-11.48	1.20	13.70	30.00	-16.30
	5550	110	AVG	16.81	16.75	23.98	-7.17	1.20	18.01	30.00	-11.99
	5590	118	AVG	17.47	17.60	23.98	-6.51	1.20	18.67	30.00	-11.34
	5630	126	AVG	18.38	18.38	23.98	-5.60	1.20	19.58	30.00	-10.42
	5670	134	AVG	15.50	15.00	23.98	-8.48	1.20	16.70	30.00	-13.30
	5710	142	AVG	17.42	17.61	23.98	-6.56	1.20	18.62	30.00	-11.38
	5755	151	AVG	17.48	17.61	30.00	-12.52	0.40	17.88	-	-
	5795	159	AVG	17.43	17.59	30.00	-12.57	0.40	17.83	-	-

Table 7-37. ISED Antenna WF5B 40MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11ac	802.11ax						
	5210	42	AVG	13.99	13.80	-	-	2.20	16.19	23.01	-6.82
	5290	58	AVG	16.00	16.00	23.98	-7.98	2.00	18.00	30.00	-12.00
	5530	106	AVG	15.25	14.41	23.98	-8.73	1.20	16.45	30.00	-13.55
	5690	138	AVG	18.46	18.42	23.98	-5.52	1.20	19.66	30.00	-10.34
	5775	155	AVG	18.33	17.89	30.00	-11.67	0.40	18.73	-	-

Table 7-38. ISED Antenna WF5B 80MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11ac	802.11ax						
	5210	42	AVG	13.34	13.30	-	-	2.20	15.54	23.01	-7.47
	5290	58	AVG	14.83	15.00	23.98	-9.15	2.00	16.83	30.00	-13.17
	5530	106	AVG	13.95	13.34	23.98	-10.03	1.20	15.15	30.00	-14.85
	5610	122	AVG	18.24	17.29	23.98	-5.74	1.20	19.44	30.00	-10.56
	5690	138	AVG	18.42	18.44	23.98	-5.56	1.20	19.62	30.00	-10.38
	5775	155	AVG	18.46	17.21	30.00	-11.54	0.40	18.86	-	-

Table 7-39. ISED Antenna WF5B 80MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11ac	802.11ax						
	5210	42	AVG	12.90	12.50	-	-	2.20	15.10	23.01	-7.91
	5290	58	AVG	13.80	13.84	23.98	-10.18	2.00	15.80	30.00	-14.20
	5530	106	AVG	12.41	12.42	23.98	-11.57	1.20	13.61	30.00	-16.39
	5690	138	AVG	18.47	18.45	23.98	-5.51	1.20	19.67	30.00	-10.33
	5775	155	AVG	17.35	16.87	30.00	-12.65	0.40	17.75	-	-

Table 7-40. ISED Antenna WF5B 80MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 86 of 577

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11ac	802.11ax						
				13.00	13.00	23.98	-10.98	2.20	15.20	23.01	-7.81

Table 7-41. ISED Antenna WF5B 160MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11ac	802.11ax						
				12.34	12.50	23.98	-11.64	2.20	14.54	23.01	-8.47

Table 7-42. ISED Antenna WF5B 160MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11ac	802.11ax						
				11.89	11.80	23.98	-12.09	2.20	14.09	23.01	-8.92

Table 7-43. ISED Antenna WF5B 160MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 87 of 577

V 10.5 12/15/2021

7.4.3 FCC Antenna 4a Conducted Output Power Measurements

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11a	802.11n	802.11ax		
	5180	36	AVG	17.75	17.75	16.83	23.98	-6.23
	5200	40	AVG	18.37	18.34	18.38	23.98	-5.61
	5240	48	AVG	18.36	18.28	18.37	23.98	-5.62
	5260	52	AVG	18.34	18.44	18.33	23.98	-5.54
	5300	60	AVG	18.45	18.46	18.38	23.98	-5.52
	5320	64	AVG	18.12	18.34	18.50	23.98	-5.64
	5500	100	AVG	17.88	17.77	17.00	23.98	-6.10
	5520	104	AVG	18.41	18.40	18.39	23.98	-5.57
	5580	116	AVG	18.44	18.45	18.32	23.98	-5.53
	5680	136	AVG	18.47	18.45	18.33	23.98	-5.51
	5700	140	AVG	17.45	17.35	16.38	23.98	-6.53
	5720	144	AVG	18.45	18.35	18.46	23.98	-5.53
	5745	149	AVG	18.42	18.42	18.45	30.00	-11.58
	5785	157	AVG	18.45	18.38	18.40	30.00	-11.55
	5825	165	AVG	18.37	18.40	18.42	30.00	-11.60

Table 7-44. FCC Antenna 4a 20MHz BW (UNII) Maximum Conducted Output Power (Low Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
			802.11a	802.11n	802.11ax		
	5180	36	16.59	16.64	15.94	23.98	-7.34
	5200	40	18.38	18.13	18.32	23.98	-5.60
	5240	48	18.48	18.39	18.31	23.98	-5.50
	5260	52	18.47	18.48	18.38	23.98	-5.50
	5300	60	18.37	18.41	18.47	23.98	-5.57
	5320	64	18.00	18.00	17.45	23.98	-5.98
	5500	100	16.50	16.31	15.96	23.98	-7.48
	5520	104	18.49	18.34	18.00	23.98	-5.49
	5580	116	18.49	18.43	18.30	23.98	-5.49
	5680	136	18.32	18.30	18.41	23.98	-5.66
	5700	140	16.46	16.50	15.39	23.98	-7.48
	5720	144	18.37	18.14	18.50	23.98	-5.61
	5745	149	18.40	18.41	18.41	30.00	-11.59
	5785	157	18.42	18.43	18.38	30.00	-11.57
	5825	165	18.45	18.40	18.74	30.00	-11.55

Table 7-45. FCC Antenna 4a 20MHz BW (UNII) Maximum Conducted Output Power (Mid Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 88 of 577

V 10.5 12/15/2021

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11a	802.11n	802.11ax		
	5180	36	AVG	15.90	15.79	15.50	23.98	-8.08
	5200	40	AVG	18.20	18.33	18.37	23.98	-5.65
	5240	48	AVG	18.32	18.22	18.32	23.98	-5.66
	5260	52	AVG	18.43	18.38	18.36	23.98	-5.55
	5300	60	AVG	18.46	18.45	18.33	23.98	-5.52
	5320	64	AVG	17.00	16.76	16.44	23.98	-6.98
	5500	100	AVG	14.26	14.50	14.49	23.98	-9.48
	5520	104	AVG	17.87	17.82	17.00	23.98	-6.11
	5540	108	AVG	18.21	18.15	18.35	23.98	-5.77
	5580	116	AVG	18.38	18.37	18.49	23.98	-5.60
	5680	136	AVG	18.33	18.41	18.40	23.98	-5.57
	5700	140	AVG	14.02	14.18	13.92	23.98	-9.80
	5720	144	AVG	18.37	18.36	18.45	23.98	-5.61
	5745	149	AVG	18.42	18.49	18.43	30.00	-11.51
	5785	157	AVG	18.39	18.43	18.49	30.00	-11.57
	5825	165	AVG	18.41	18.41	18.42	30.00	-11.59

Table 7-46. FCC Antenna 4a 20MHz BW (UNII) Maximum Conducted Output Power (High Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11n	802.11ax		
	5190	38	AVG	14.28	14.25	23.98	-9.70
	5230	46	AVG	18.28	18.50	23.98	-5.70
	5270	54	AVG	18.29	18.40	23.98	-5.69
	5310	62	AVG	17.25	16.50	23.98	-6.73
	5510	102	AVG	15.26	15.00	23.98	-8.72
	5550	110	AVG	18.33	18.41	23.98	-5.65
	5590	118	AVG	18.37	18.49	23.98	-5.61
	5710	142	AVG	18.37	18.50	23.98	-5.61
	5755	151	AVG	18.44	18.23	30.00	-11.56
	5795	159	AVG	18.39	18.34	30.00	-11.61

Table 7-47. FCC Antenna 4a 40MHz BW (UNII) Maximum Conducted Output Power (Low Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 89 of 577

V 10.5 12/15/2021

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11n	802.11ax		
	5190	38	AVG	14.22	14.19	23.98	-9.76
	5230	46	AVG	18.45	18.48	23.98	-5.53
	5270	54	AVG	18.46	18.50	23.98	-5.52
	5310	62	AVG	15.86	15.50	23.98	-8.12
	5510	102	AVG	14.50	13.78	23.98	-9.48
	5550	110	AVG	18.29	17.92	23.98	-5.69
	5590	118	AVG	18.27	18.27	23.98	-5.71
	5630	126	AVG	18.31	18.50	23.98	-5.67
	5670	134	AVG	18.00	16.84	23.98	-5.98
	5710	142	AVG	18.45	18.45	23.98	-5.53
	5755	151	AVG	18.24	18.44	30.00	-11.76
	5795	159	AVG	18.32	18.32	30.00	-11.68

Table 7-48. FCC Antenna 4a 40MHz BW (UNII) Maximum Conducted Output Power (Mid Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11n	802.11ax		
	5190	38	AVG	13.92	13.42	23.98	-10.06
	5230	46	AVG	18.46	18.27	23.98	-5.52
	5270	54	AVG	18.35	18.35	23.98	-5.63
	5310	62	AVG	14.46	13.76	23.98	-9.52
	5510	102	AVG	12.40	12.41	23.98	-11.58
	5550	110	AVG	16.95	17.00	23.98	-7.03
	5590	118	AVG	18.32	18.26	23.98	-5.66
	5670	134	AVG	15.28	15.00	23.98	-8.70
	5710	142	AVG	18.30	18.47	23.98	-5.68
	5755	151	AVG	18.43	18.40	30.00	-11.57
	5795	159	AVG	18.49	18.43	30.00	-11.51

Table 7-49. FCC Antenna 4a 40MHz BW (UNII) Maximum Conducted Output Power (High Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 90 of 577

V 10.5 12/15/2021

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11ac	802.11ax		
	5210	42	AVG	13.81	13.92	23.98	-10.17
	5290	58	AVG	15.85	15.91	23.98	-8.13
	5530	106	AVG	15.25	14.50	23.98	-8.73
	5610	122	AVG	18.42	18.35	23.98	-5.56
	5690	138	AVG	18.41	18.46	23.98	-5.57
	5775	155	AVG	18.37	17.98	30.00	-11.63

Table 7-50. FCC Antenna 4a 80MHz BW (UNII) Maximum Conducted Output Power (Low Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11ac	802.11ax		
	5210	42	AVG	13.37	13.36	23.98	-10.61
	5290	58	AVG	14.84	14.87	23.98	-9.14
	5530	106	AVG	13.97	13.42	23.98	-10.01
	5610	122	AVG	18.20	17.27	23.98	-5.78
	5690	138	AVG	18.42	18.44	23.98	-5.56
	5775	155	AVG	18.41	17.14	30.00	-11.59

Table 7-51. FCC Antenna 4a 80MHz BW (UNII) Maximum Conducted Output Power (Mid Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11ac	802.11ax		
	5210	42	AVG	12.91	12.34	23.98	-11.07
	5290	58	AVG	13.77	14.00	23.98	-10.21
	5530	106	AVG	12.44	12.50	23.98	-11.54
	5610	122	AVG	16.80	16.42	23.98	-7.18
	5690	138	AVG	18.46	18.42	23.98	-5.52
	5775	155	AVG	17.30	16.91	30.00	-12.70

Table 7-52. FCC Antenna 4a 80MHz BW (UNII) Maximum Conducted Output Power (High Data Rate)

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11ac	802.11ax		
	5250	50	AVG	13.00	13.00	23.98	-10.98
	5570	114	AVG	12.42	12.42	23.98	-11.56

Table 7-53. FCC Antenna 4a 160MHz BW (UNII) Maximum Conducted Output Power (Low Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 91 of 577

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11ac	802.11ax		
	5250	50	AVG	12.46	12.50	23.98	-11.52
	5570	114	AVG	12.00	12.00	23.98	-11.98

Table 7-54. FCC Antenna 4a 160MHz BW (UNII) Maximum Conducted Output Power (Mid Data Rate)

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11ac	802.11ax		
	5250	50	AVG	11.76	11.82	23.98	-12.22
	5570	114	AVG	10.99	10.50	23.98	-12.99

Table 7-55. FCC Antenna 4a 160MHz BW (UNII) Maximum Conducted Output Power (High Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 92 of 577

V 10.5 12/15/2021

7.4.4 ISED Antenna 4a Conducted Output Power Measurements

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11a	802.11n	802.11ax						
	5180	36	AVG	16.03	16.09	16.23	-	-	-0.30	15.79	23.01	-7.22
	5200	40	AVG	16.19	16.16	16.25	-	-	-0.30	15.89	23.01	-7.12
	5240	48	AVG	16.25	16.16	16.23	-	-	-0.30	15.95	23.01	-7.06
	5260	52	AVG	18.34	18.44	18.33	23.98	-5.54	-0.20	18.24	30.00	-11.76
	5300	60	AVG	18.45	18.46	18.38	23.98	-5.52	-0.20	18.26	30.00	-11.74
	5320	64	AVG	18.12	18.34	18.50	23.98	-5.64	-0.20	18.14	30.00	-11.86
	5500	100	AVG	17.88	17.77	17.00	23.98	-6.10	0.30	18.18	30.00	-11.82
	5580	116	AVG	18.44	18.45	18.32	23.98	-5.53	0.30	18.75	30.00	-11.25
	5700	140	AVG	17.45	17.35	16.38	23.98	-6.53	0.30	17.75	30.00	-12.25
	5720	144	AVG	18.45	18.35	18.46	23.98	-5.53	0.30	18.75	30.00	-11.25
	5745	149	AVG	18.42	18.42	18.45	30.00	-11.58	0.40	18.82	-	-
	5785	157	AVG	18.45	18.38	18.40	30.00	-11.55	0.40	18.85	-	-
	5825	165	AVG	18.37	18.40	18.42	30.00	-11.60	0.40	18.80	-	-

Table 7-56. ISED Antenna 4a 20MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11a	802.11n	802.11ax						
	5180	36	AVG	16.25	16.01	16.00	-	-	-0.30	15.95	23.01	-7.06
	5200	40	AVG	16.25	16.11	16.25	-	-	-0.30	15.95	23.01	-7.06
	5240	48	AVG	16.06	16.21	16.20	-	-	-0.30	15.91	23.01	-7.10
	5260	52	AVG	18.47	18.48	18.38	23.98	-5.50	-0.20	18.28	30.00	-11.72
	5300	60	AVG	18.37	18.41	18.47	23.98	-5.57	-0.20	18.21	30.00	-11.79
	5320	64	AVG	18.00	18.00	17.45	23.98	-5.98	-0.20	17.80	30.00	-12.20
	5500	100	AVG	16.50	16.31	15.96	23.98	-7.48	0.30	16.80	30.00	-13.20
	5520	104	AVG	18.49	18.34	18.00	23.98	-5.49	0.30	18.79	30.00	-11.21
	5580	116	AVG	18.49	18.43	18.30	23.98	-5.49	0.30	18.79	30.00	-11.21
	5680	136	AVG	18.32	18.30	18.41	23.98	-5.66	0.30	18.62	30.00	-11.38
	5700	140	AVG	16.46	16.50	15.39	23.98	-7.48	0.30	16.80	30.00	-13.20
	5720	144	AVG	18.37	18.14	18.50	23.98	-5.61	0.30	18.67	30.00	-11.33
	5745	149	AVG	18.40	18.41	18.41	30.00	-11.59	0.40	18.81	-	-
	5785	157	AVG	18.42	18.43	18.38	30.00	-11.57	0.40	18.83	-	-
	5825	165	AVG	18.45	18.40	18.74	30.00	-11.55	0.40	18.85	-	-

Table 7-57. ISED Antenna 4a 20MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11a	802.11n	802.11ax						
	5180	36	AVG	16.00	16.00	15.41	-	-	-0.30	15.70	23.01	-7.31
	5200	40	AVG	16.25	16.04	16.04	-	-	-0.30	15.95	23.01	-7.06
	5240	48	AVG	16.11	16.17	16.11	-	-	-0.30	15.87	23.01	-7.15
	5260	52	AVG	18.43	18.38	18.36	23.98	-5.55	-0.20	18.23	30.00	-11.77
	5300	60	AVG	18.46	18.45	18.33	23.98	-5.52	-0.20	18.26	30.00	-11.74
	5320	64	AVG	17.00	16.76	16.44	23.98	-6.98	-0.20	16.80	30.00	-13.20
	5500	100	AVG	14.26	14.50	14.49	23.98	-9.48	0.30	14.80	30.00	-15.20
	5520	104	AVG	17.87	17.82	17.00	23.98	-6.11	0.30	18.17	30.00	-11.83
	5540	108	AVG	18.21	18.15	18.35	23.98	-5.77	0.30	18.51	30.00	-11.49
	5580	116	AVG	18.38	18.37	18.49	23.98	-5.60	0.30	18.68	30.00	-11.32
	5680	136	AVG	18.33	18.41	18.40	23.98	-5.57	0.30	18.71	30.00	-11.29
	5700	140	AVG	14.02	14.18	13.92	23.98	-9.80	0.30	14.48	30.00	-15.52
	5720	144	AVG	18.37	18.36	18.45	23.98	-5.61	0.30	18.67	30.00	-11.33
	5745	149	AVG	18.42	18.49	18.43	30.00	-11.51	0.40	18.89	-	-
	5785	157	AVG	18.39	18.43	18.49	30.00	-11.57	0.40	18.83	-	-
	5825	165	AVG	18.41	18.41	18.42	30.00	-11.59	0.40	18.81	-	-

Table 7-58. ISED Antenna 4a 20MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 93 of 577

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11n	802.11ax						
	5190	38	AVG	14.50	14.11	-	-	-0.30	14.20	23.01	-8.81
	5230	46	AVG	18.35	18.30	-	-	-0.30	18.05	23.01	-4.96
	5270	54	AVG	18.29	18.40	23.98	-5.69	-0.20	18.09	30.00	-11.92
	5310	62	AVG	17.25	16.50	23.98	-6.73	-0.20	17.05	30.00	-12.95
	5510	102	AVG	15.26	15.00	23.98	-8.72	0.30	15.56	30.00	-14.44
	5550	110	AVG	18.33	18.41	23.98	-5.65	0.30	18.63	30.00	-11.37
	5590	118	AVG	18.37	18.49	23.98	-5.61	0.30	18.67	30.00	-11.33
	5710	142	AVG	18.37	18.50	23.98	-5.61	0.30	18.67	30.00	-11.33
	5755	151	AVG	18.44	18.23	30.00	-11.56	0.40	18.84	-	-
	5795	159	AVG	18.39	18.34	30.00	-11.61	0.40	18.79	-	-

Table 7-59. ISED Antenna 4a 40MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11n	802.11ax						
	5190	38	AVG	14.01	14.13	-	-	-0.30	13.71	23.01	-9.30
	5230	46	AVG	18.18	18.36	-	-	-0.30	17.88	23.01	-5.13
	5270	54	AVG	18.47	18.45	23.98	-5.51	-0.20	18.27	30.00	-11.73
	5310	62	AVG	15.84	15.43	23.98	-8.14	-0.20	15.64	30.00	-14.36
	5510	102	AVG	14.42	14.00	23.98	-9.56	0.30	14.72	30.00	-15.28
	5550	110	AVG	18.35	18.00	23.98	-5.63	0.30	18.65	30.00	-11.36
	5590	118	AVG	18.50	18.50	23.98	-5.48	0.30	18.80	30.00	-11.20
	5630	126	AVG	18.25	18.23	23.98	-5.73	0.30	18.55	30.00	-11.45
	5670	134	AVG	17.79	16.98	23.98	-6.19	0.30	18.09	30.00	-11.91
	5710	142	AVG	18.38	18.37	23.98	-5.60	0.30	18.68	30.00	-11.32
	5755	151	AVG	18.34	18.40	30.00	-11.66	0.40	18.74	-	-
	5795	159	AVG	18.40	18.41	30.00	-11.60	0.40	18.80	-	-

Table 7-60. ISED Antenna 4a 40MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11n	802.11ax						
	5190	38	AVG	13.96	13.34	-	-	-0.30	13.66	23.01	-9.35
	5230	46	AVG	17.92	18.16	-	-	-0.30	17.62	23.01	-5.39
	5270	54	AVG	18.35	18.35	23.98	-5.63	-0.20	18.15	30.00	-11.85
	5310	62	AVG	14.46	13.76	23.98	-9.52	-0.20	14.26	30.00	-15.74
	5510	102	AVG	12.26	12.41	23.98	-11.72	0.30	12.56	30.00	-17.44
	5550	110	AVG	16.95	17.00	23.98	-7.03	0.30	17.25	30.00	-12.75
	5590	118	AVG	18.32	18.26	23.98	-5.66	0.30	18.62	30.00	-11.38
	5630	126	AVG	18.22	18.44	23.98	-5.76	0.30	18.52	30.00	-11.48
	5670	134	AVG	15.28	15.00	23.98	-8.70	0.30	15.58	30.00	-14.42
	5710	142	AVG	18.30	18.47	23.98	-5.68	0.30	18.60	30.00	-11.40
	5755	151	AVG	18.03	18.20	30.00	-11.97	0.40	18.43	-	-
	5795	159	AVG	18.09	18.23	30.00	-11.92	0.40	18.49	-	-

Table 7-61. ISED Antenna 4a 40MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 94 of 577

V 10.5 12/15/2021

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11ac	802.11ax						
	5210	42	AVG	13.82	13.82	-	-	-0.30	13.52	23.01	-9.49
	5290	58	AVG	15.85	15.91	23.98	-8.13	-0.20	15.65	30.00	-14.35
	5530	106	AVG	15.25	14.50	23.98	-8.73	0.30	15.55	30.00	-14.45
	5690	138	AVG	18.41	18.46	23.98	-5.57	0.30	18.71	30.00	-11.29
	5775	155	AVG	18.37	17.98	30.00	-11.63	0.40	18.77	-	-

Table 7-62. ISED Antenna 4a 80MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11ac	802.11ax						
	5210	42	AVG	13.50	13.50	-	-	-0.30	13.20	23.01	-9.81
	5290	58	AVG	14.84	14.87	23.98	-9.14	-0.20	14.64	30.00	-15.36
	5530	106	AVG	13.95	13.34	23.98	-10.03	0.30	14.25	30.00	-15.75
	5610	122	AVG	18.24	17.29	23.98	-5.74	0.30	18.54	30.00	-11.46
	5690	138	AVG	18.42	18.44	23.98	-5.56	0.30	18.72	30.00	-11.28
	5775	155	AVG	18.46	17.21	30.00	-11.54	0.40	18.86	-	-

Table 7-63. ISED Antenna 4a 80MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11ac	802.11ax						
	5210	42	AVG	12.99	12.34	-	-	-0.30	12.69	23.01	-10.32
	5290	58	AVG	13.77	14.00	23.98	-10.21	-0.20	13.57	30.00	-16.43
	5530	106	AVG	12.44	12.50	23.98	-11.54	0.30	12.74	30.00	-17.26
	5690	138	AVG	18.46	18.42	23.98	-5.52	0.30	18.76	30.00	-11.24
	5775	155	AVG	17.30	16.91	30.00	-12.70	0.40	17.70	-	-

Table 7-64. ISED Antenna 4a 80MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 95 of 577

V 10.5 12/15/2021

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11ac	802.11ax						
	5250	50	AVG	12.85	13.00	23.98	-11.13	-0.20	12.65	23.01	-10.36

Table 7-65. ISSED Antenna 4a 160MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11ac	802.11ax						
	5250	50	AVG	12.50	12.31	23.98	-11.48	-0.20	12.30	23.01	-10.71

Table 7-66. ISSED Antenna 4a 160MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11ac	802.11ax						
	5250	50	AVG	11.84	11.96	23.98	-12.14	-0.20	11.64	23.01	-11.37

Table 7-67. ISSED Antenna 4a 160MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 96 of 577

7.4.5 FCC Antenna 2a Conducted Output Power Measurements

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11a	802.11n	802.11ax		
	5180	36	AVG	17.75	17.75	16.96	23.98	-6.23
	5200	40	AVG	18.46	18.37	18.46	23.98	-5.52
	5240	48	AVG	18.36	18.43	18.50	23.98	-5.55
	5260	52	AVG	18.50	18.50	18.50	23.98	-5.48
	5300	60	AVG	18.25	18.50	18.27	23.98	-5.48
	5320	64	AVG	18.41	18.34	18.27	23.98	-5.57
	5500	100	AVG	17.88	17.87	17.00	23.98	-6.10
	5520	104	AVG	18.41	18.41	18.10	23.98	-5.57
	5580	116	AVG	18.49	18.39	18.34	23.98	-5.49
	5680	136	AVG	18.42	17.78	18.04	23.98	-5.56
	5700	140	AVG	17.50	17.42	16.30	23.98	-6.48
	5720	144	AVG	18.45	18.40	18.13	23.98	-5.53
	5745	149	AVG	18.46	18.43	18.45	30.00	-11.54
	5785	157	AVG	18.44	18.44	18.23	30.00	-11.56
	5825	165	AVG	18.48	18.36	18.18	30.00	-11.52

Table 7-68. FCC Antenna 2a 20MHz BW (UNII) Maximum Conducted Output Power (Low Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11a	802.11n	802.11ax		
	5180	36	AVG	16.75	16.71	15.74	23.98	-7.23
	5200	40	AVG	18.32	18.27	18.50	23.98	-5.66
	5240	48	AVG	18.44	18.50	18.29	23.98	-5.48
	5260	52	AVG	18.49	18.44	18.42	23.98	-5.49
	5300	60	AVG	18.30	18.33	18.36	23.98	-5.65
	5320	64	AVG	18.00	17.93	17.29	23.98	-5.98
	5500	100	AVG	16.50	16.39	15.84	23.98	-7.48
	5520	104	AVG	18.45	18.44	17.87	23.98	-5.53
	5580	116	AVG	18.39	18.12	18.35	23.98	-5.59
	5680	136	AVG	18.40	18.38	18.39	23.98	-5.58
	5700	140	AVG	16.50	16.33	15.32	23.98	-7.48
	5720	144	AVG	18.40	18.44	18.44	23.98	-5.54
	5745	149	AVG	18.38	18.48	18.39	30.00	-11.52
	5785	157	AVG	18.43	18.40	18.43	30.00	-11.57
	5825	165	AVG	18.41	18.36	18.29	30.00	-11.59

Table 7-69. FCC Antenna 2a 20MHz BW (UNII) Maximum Conducted Output Power (Mid Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 97 of 577

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11a	802.11n	802.11ax		
	5180	36	AVG	15.98	16.00	15.47	23.98	-7.98
	5200	40	AVG	18.34	18.42	18.33	23.98	-5.56
	5240	48	AVG	18.45	18.34	18.47	23.98	-5.53
	5260	52	AVG	18.50	18.50	18.36	23.98	-5.48
	5300	60	AVG	18.29	18.44	18.35	23.98	-5.54
	5320	64	AVG	17.00	16.91	16.48	23.98	-6.98
	5500	100	AVG	14.50	14.50	14.26	23.98	-9.48
	5520	104	AVG	18.00	17.91	16.90	23.98	-5.98
	5540	108	AVG	17.94	17.89	17.90	23.98	-6.04
	5580	116	AVG	18.40	18.42	18.44	23.98	-5.56
	5680	136	AVG	18.47	18.40	18.41	23.98	-5.51
	5700	140	AVG	14.25	14.25	13.80	23.98	-9.73
	5720	144	AVG	18.42	18.44	18.38	23.98	-5.54
	5745	149	AVG	18.42	18.45	18.43	30.00	-11.55
	5785	157	AVG	18.44	18.48	18.42	30.00	-11.52
	5825	165	AVG	18.48	18.47	18.40	30.00	-11.52

Table 7-70. FCC Antenna 2a 20MHz BW (UNII) Maximum Conducted Output Power (High Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11n	802.11ax		
	5190	38	AVG	14.26	14.25	23.98	-9.72
	5230	46	AVG	18.30	18.43	23.98	-5.68
	5270	54	AVG	18.50	18.50	23.98	-5.48
	5310	62	AVG	17.16	16.49	23.98	-6.82
	5510	102	AVG	15.27	15.00	23.98	-8.71
	5550	110	AVG	18.30	18.35	23.98	-5.68
	5590	118	AVG	18.33	18.40	23.98	-5.65
	5710	142	AVG	18.39	18.44	23.98	-5.59
	5755	151	AVG	18.40	18.48	30.00	-11.60
	5795	159	AVG	18.45	18.38	30.00	-11.55

Table 7-71. FCC Antenna 2a 40MHz BW (UNII) Maximum Conducted Output Power (Low Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 98 of 577

V 10.5 12/15/2021

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11n	802.11ax		
	5190	38	AVG	14.19	14.02	23.98	-9.79
	5230	46	AVG	18.50	18.43	23.98	-5.48
	5270	54	AVG	18.47	18.45	23.98	-5.51
	5310	62	AVG	15.84	15.43	23.98	-8.14
	5510	102	AVG	14.42	14.00	23.98	-9.56
	5550	110	AVG	18.35	18.00	23.98	-5.63
	5590	118	AVG	18.50	18.50	23.98	-5.48
	5630	126	AVG	18.25	18.23	23.98	-5.73
	5670	134	AVG	17.79	16.98	23.98	-6.19
	5710	142	AVG	18.38	18.37	23.98	-5.60
	5755	151	AVG	18.34	18.40	30.00	-11.66
	5795	159	AVG	18.40	18.41	30.00	-11.60

Table 7-72. FCC Antenna 2a 40MHz BW (UNII) Maximum Conducted Output Power (Mid Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11n	802.11ax		
	5190	38	AVG	13.80	13.50	23.98	-10.18
	5230	46	AVG	18.41	18.34	23.98	-5.57
	5270	54	AVG	18.50	18.40	23.98	-5.48
	5310	62	AVG	14.28	13.88	23.98	-9.70
	5510	102	AVG	12.33	12.50	23.98	-11.65
	5550	110	AVG	17.00	17.00	23.98	-6.98
	5590	118	AVG	18.40	18.48	23.98	-5.58
	5670	134	AVG	15.27	14.86	23.98	-8.71
	5710	142	AVG	18.38	18.47	23.98	-5.60
	5755	151	AVG	18.43	18.49	30.00	-11.57
	5795	159	AVG	18.41	18.33	30.00	-11.59

Table 7-73. FCC Antenna 2a 40MHz BW (UNII) Maximum Conducted Output Power (High Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 99 of 577

V 10.5 12/15/2021

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11ac	802.11ax		
	5210	42	AVG	13.88	13.84	23.98	-10.10
	5290	58	AVG	16.00	15.87	23.98	-7.98
	5530	106	AVG	15.21	14.35	23.98	-8.77
	5610	122	AVG	18.33	18.36	23.98	-5.65
	5690	138	AVG	18.43	18.40	23.98	-5.55
	5775	155	AVG	18.30	18.33	30.00	-11.70

Table 7-74. FCC Antenna 2a 80MHz BW (UNII) Maximum Conducted Output Power (Low Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11ac	802.11ax		
	5210	42	AVG	13.45	13.30	23.98	-10.53
	5290	58	AVG	14.78	15.00	23.98	-9.20
	5530	106	AVG	13.79	13.27	23.98	-10.19
	5610	122	AVG	18.21	17.50	23.98	-5.77
	5690	138	AVG	18.39	18.47	23.98	-5.59
	5775	155	AVG	18.40	17.14	30.00	-11.60

Table 7-75. FCC Antenna 2a 80MHz BW (UNII) Maximum Conducted Output Power (Mid Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11ac	802.11ax		
	5210	42	AVG	13.00	12.44	23.98	-10.98
	5290	58	AVG	13.85	13.93	23.98	-10.13
	5530	106	AVG	12.45	12.48	23.98	-11.53
	5610	122	AVG	16.97	16.50	23.98	-7.01
	5690	138	AVG	18.41	18.47	23.98	-5.57
	5775	155	AVG	17.39	17.00	30.00	-12.61

Table 7-76. FCC Antenna 2a 80MHz BW (UNII) Maximum Conducted Output Power (High Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 100 of 577

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11ac	802.11ax		
	5250	50	AVG	12.96	12.94	23.98	-1.10
	5570	114	AVG	12.37	12.32	23.98	-1.70

Table 7-77. FCC Antenna 2a 160MHz BW (UNII) Maximum Conducted Output Power (Low Data Rate)

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11ac	802.11ax		
	5250	50	AVG	12.32	12.42	23.98	-11.66
	5570	114	AVG	11.84	11.75	23.98	-11.98

Table 7-78. FCC Antenna 2a 160MHz BW (UNII) Maximum Conducted Output Power (Mid Data Rate)

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11ac	802.11ax		
	5250	50	AVG	11.98	11.83	23.98	-12.00
	5570	114	AVG	11.00	10.44	23.98	-12.98

Table 7-79. FCC Antenna 2a 160MHz BW (UNII) Maximum Conducted Output Power (High Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 101 of 577

V 10.5 12/15/2021

7.4.6 ISED Antenna 2a Conducted Output Power Measurements

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11a	802.11n	802.11ax						
	5180	36	AVG	16.25	16.14	16.25	-	-	-1.10	15.15	23.01	-7.86
	5200	40	AVG	16.20	16.09	16.12	-	-	-1.10	15.10	23.01	-7.91
	5240	48	AVG	16.25	16.21	16.15	-	-	-1.10	15.15	23.01	-7.86
	5260	52	AVG	18.50	18.50	18.50	23.98	-5.48	-1.30	17.20	30.00	-12.80
	5300	60	AVG	18.25	18.50	18.27	23.98	-5.48	-1.30	17.20	30.00	-12.80
	5320	64	AVG	18.41	18.34	18.27	23.98	-5.57	-1.30	17.11	30.00	-12.89
	5500	100	AVG	17.88	17.87	17.00	23.98	-6.10	-0.80	17.08	30.00	-12.92
	5520	104	AVG	18.41	18.41	18.10	23.98	-5.57	-0.80	17.61	30.00	-12.39
	5580	116	AVG	18.49	18.39	18.34	23.98	-5.49	-0.80	17.69	30.00	-12.31
	5680	136	AVG	18.42	17.78	18.04	23.98	-5.56	-0.80	17.62	30.00	-12.38
	5700	140	AVG	17.50	17.42	16.30	23.98	-6.48	-0.80	16.70	30.00	-13.30
	5720	144	AVG	18.45	18.40	18.13	23.98	-5.53	-0.80	17.65	30.00	-12.35
	5745	149	AVG	18.46	18.43	18.45	30.00	-11.54	-1.70	16.76	-	-
	5785	157	AVG	18.44	18.44	18.23	30.00	-11.56	-1.70	16.74	-	-
	5825	165	AVG	18.48	18.36	18.18	30.00	-11.52	-1.70	16.78	-	-

Table 7-80. ISED Antenna 2a 20MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11a	802.11n	802.11ax						
	5180	36	AVG	16.06	16.18	16.00	-	-	-1.10	15.08	23.01	-7.93
	5200	40	AVG	16.07	16.14	16.25	-	-	-1.10	15.04	23.01	-7.97
	5240	48	AVG	16.18	16.25	15.97	-	-	-1.10	15.15	23.01	-7.86
	5260	52	AVG	18.49	18.44	18.42	23.98	-5.49	-1.30	17.19	30.00	-12.81
	5300	60	AVG	18.30	18.33	18.36	23.98	-5.65	-1.30	17.03	30.00	-12.97
	5320	64	AVG	18.00	17.93	17.29	23.98	-5.98	-1.30	16.70	30.00	-13.30
	5500	100	AVG	16.50	16.39	15.84	23.98	-7.48	-0.80	15.70	30.00	-14.30
	5520	104	AVG	18.45	18.44	17.87	23.98	-5.53	-0.80	17.65	30.00	-12.35
	5580	116	AVG	18.39	18.12	18.35	23.98	-5.59	-0.80	17.59	30.00	-12.41
	5680	136	AVG	18.40	18.38	18.39	23.98	-5.58	-0.80	17.60	30.00	-12.40
	5700	140	AVG	16.50	16.33	15.32	23.98	-7.48	-0.80	15.70	30.00	-14.30
	5720	144	AVG	18.40	18.44	18.44	23.98	-5.54	-0.80	17.64	30.00	-12.36
	5745	149	AVG	18.38	18.48	18.39	30.00	-11.52	-1.70	16.78	-	-
	5785	157	AVG	18.43	18.40	18.43	30.00	-11.57	-1.70	16.73	-	-
	5825	165	AVG	18.41	18.36	18.29	30.00	-11.59	-1.70	16.71	-	-

Table 7-81. ISED Antenna 2a 20MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 102 of 577

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11a	802.11n	802.11ax						
	5180	36	AVG	15.86	16.00	15.35	-	-	-1.10	14.90	23.01	-8.11
	5200	40	AVG	16.08	16.25	16.10	-	-	-1.10	15.15	23.01	-7.86
	5240	48	AVG	16.19	16.03	16.13	-	-	-1.10	15.09	23.01	-7.92
	5260	52	AVG	18.50	18.50	18.36	23.98	-5.48	-1.30	17.20	30.00	-12.80
	5300	60	AVG	18.29	18.44	18.35	23.98	-5.54	-1.30	17.14	30.00	-12.86
	5320	64	AVG	17.00	16.91	16.48	23.98	-6.98	-1.30	15.70	30.00	-14.30
	5500	100	AVG	14.50	14.50	14.26	23.98	-9.48	-0.80	13.70	30.00	-16.30
	5520	104	AVG	18.00	17.91	16.90	23.98	-5.98	-0.80	17.20	30.00	-12.80
	5540	108	AVG	17.94	17.89	17.90	23.98	-6.04	-0.80	17.14	30.00	-12.86
	5580	116	AVG	18.40	18.42	18.44	23.98	-5.56	-0.80	17.62	30.00	-12.38
	5680	136	AVG	18.47	18.40	18.41	23.98	-5.51	-0.80	17.67	30.00	-12.33
	5700	140	AVG	14.25	14.25	13.80	23.98	-9.73	-0.80	13.45	30.00	-16.55
	5720	144	AVG	18.42	18.44	18.38	23.98	-5.54	-0.80	17.64	30.00	-12.36
	5745	149	AVG	18.42	18.45	18.43	30.00	-11.55	-1.70	16.75	-	-
	5785	157	AVG	18.44	18.48	18.42	30.00	-11.52	-1.70	16.78	-	-
	5825	165	AVG	18.48	18.47	18.40	30.00	-11.52	-1.70	16.78	-	-

Table 7-82. ISED Antenna 2a 20MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11n	802.11ax						
	5190	38	AVG	14.33	14.16	-	-	-1.10	13.23	23.01	-9.78
	5230	46	AVG	18.40	18.28	-	-	-1.10	17.30	23.01	-5.71
	5270	54	AVG	18.50	18.50	23.98	-5.48	-1.30	17.20	30.00	-12.80
	5310	62	AVG	17.16	16.49	23.98	-6.82	-1.30	15.86	30.00	-14.14
	5510	102	AVG	15.27	15.00	23.98	-8.71	-0.80	14.47	30.00	-15.53
	5550	110	AVG	18.30	18.35	23.98	-5.68	-0.80	17.50	30.00	-12.50
	5590	118	AVG	18.33	18.40	23.98	-5.65	-0.80	17.53	30.00	-12.47
	5710	142	AVG	18.39	18.44	23.98	-5.59	-0.80	17.59	30.00	-12.41
	5755	151	AVG	18.40	18.48	30.00	-11.60	-1.70	16.70	-	-
	5795	159	AVG	18.45	18.38	30.00	-11.55	-1.70	16.75	-	-

Table 7-83. ISED Antenna 2a 40MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11n	802.11ax						
	5190	38	AVG	14.25	14.25	-	-	-1.10	13.15	23.01	-9.86
	5230	46	AVG	18.29	18.48	-	-	-1.10	17.19	23.01	-5.82
	5270	54	AVG	18.47	18.45	23.98	-5.51	-1.30	17.17	30.00	-12.83
	5310	62	AVG	15.84	15.43	23.98	-8.14	-1.30	14.54	30.00	-15.46
	5510	102	AVG	14.42	14.00	23.98	-9.56	-0.80	13.62	30.00	-16.38
	5550	110	AVG	18.35	18.00	23.98	-5.63	-0.80	17.55	30.00	-12.46
	5590	118	AVG	18.50	18.50	23.98	-5.48	-0.80	17.70	30.00	-12.30
	5630	126	AVG	18.25	18.23	23.98	-5.73	-0.80	17.45	30.00	-12.55
	5670	134	AVG	17.79	16.98	23.98	-6.19	-0.80	16.99	30.00	-13.01
	5710	142	AVG	18.38	18.37	23.98	-5.60	-0.80	17.58	30.00	-12.42
	5755	151	AVG	18.34	18.40	30.00	-11.66	-1.70	16.64	-	-
	5795	159	AVG	18.40	18.41	30.00	-11.60	-1.70	16.70	-	-

Table 7-84. ISED Antenna 2a 40MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 103 of 577

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11n	802.11ax						
	5190	38	AVG	14.00	13.50	-	-	-1.10	12.90	23.01	-10.11
	5230	46	AVG	18.25	18.29	-	-	-1.10	17.15	23.01	-5.86
	5270	54	AVG	18.50	18.40	23.98	-5.48	-1.30	17.20	30.00	-12.80
	5310	62	AVG	14.28	13.88	23.98	-9.70	-1.30	12.98	30.00	-17.03
	5510	102	AVG	12.33	12.50	23.98	-11.65	-0.80	11.53	30.00	-18.47
	5550	110	AVG	17.00	17.00	23.98	-6.98	-0.80	16.20	30.00	-13.80
	5590	118	AVG	17.95	18.18	23.98	-6.03	-0.80	17.15	30.00	-12.85
	5630	126	AVG	18.03	18.11	23.98	-5.95	-0.80	17.23	30.00	-12.77
	5670	134	AVG	15.27	14.86	23.98	-8.71	-0.80	14.47	30.00	-15.53
	5710	142	AVG	17.79	17.97	23.98	-6.19	-0.80	16.99	30.00	-13.01
	5755	151	AVG	17.93	18.09	30.00	-12.07	-1.70	16.23	-	-
	5795	159	AVG	17.81	17.93	30.00	-12.19	-1.70	16.11	-	-

Table 7-85. ISED Antenna 2a 40MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11ac	802.11ax						
	5210	42	AVG	13.93	13.93	-	-	-1.10	12.83	23.01	-10.18
	5290	58	AVG	16.00	15.87	23.98	-7.98	-1.30	14.70	30.00	-15.30
	5530	106	AVG	15.21	14.35	23.98	-8.77	-0.80	14.41	30.00	-15.59
	5690	138	AVG	18.43	18.40	23.98	-5.55	-0.80	17.63	30.00	-12.37
	5775	155	AVG	18.30	18.33	30.00	-11.70	-1.70	16.60	-	-

Table 7-86. ISED Antenna 2a 80MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11ac	802.11ax						
	5210	42	AVG	13.47	13.49	-	-	-1.10	12.37	23.01	-10.64
	5290	58	AVG	14.78	15.00	23.98	-9.20	-1.30	13.48	30.00	-16.52
	5530	106	AVG	13.79	13.27	23.98	-10.19	-0.80	12.99	30.00	-17.01
	5610	122	AVG	18.21	17.50	23.98	-5.77	-0.80	17.41	30.00	-12.59
	5690	138	AVG	18.39	18.47	23.98	-5.59	-0.80	17.59	30.00	-12.41
	5775	155	AVG	18.40	17.14	30.00	-11.60	-1.70	16.70	-	-

Table 7-87. ISED Antenna 2a 80MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11ac	802.11ax						
	5210	42	AVG	12.86	12.50	-	-	-1.10	11.76	23.01	-11.25
	5290	58	AVG	13.85	13.93	23.98	-10.13	-1.30	12.55	30.00	-17.45
	5530	106	AVG	12.45	12.48	23.98	-11.53	-0.80	11.65	30.00	-18.35
	5690	138	AVG	18.41	18.47	23.98	-5.57	-0.80	17.61	30.00	-12.39
	5775	155	AVG	17.39	17.00	30.00	-12.61	-1.70	15.69	-	-

Table 7-88. ISED Antenna 2a 80MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 104 of 577

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11ac	802.11ax						
				13.00	12.76						
	5250	50	AVG			23.98	-10.98	-1.10	11.90	23.01	-11.11

Table 7-89. ISED Antenna 2a 160MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11ac	802.11ax						
				12.26	12.28						
	5250	50	AVG			23.98	-11.72	-1.10	11.16	23.01	-11.85

Table 7-90. ISED Antenna 2a 160MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11ac	802.11ax						
				11.98	11.83						
	5250	50	AVG			23.98	-12.00	-1.10	10.88	23.01	-12.14

Table 7-91. ISED Antenna 2a 160MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 105 of 577

V 10.5 12/15/2021

7.4.7 FCC CDD Primary Maximum Conducted Output Power Measurements

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna WF5b	Antenna 4a	Summed		
	5180	36	CDD	AVG	16.90	17.00	19.96	23.98	-4.02
	5200	40	CDD	AVG	16.92	17.00	19.97	23.98	-4.01
	5240	48	CDD	AVG	17.00	17.00	20.01	23.98	-3.97
	5260	52	CDD	AVG	16.89	16.90	19.90	23.98	-4.08
	5300	60	CDD	AVG	16.77	17.00	19.90	23.98	-4.08
	5320	64	CDD	AVG	17.00	16.93	19.97	23.98	-4.01
	5500	100	CDD	AVG	16.84	16.91	19.89	23.98	-4.09
	5580	116	CDD	AVG	16.82	16.92	19.88	23.98	-4.10
	5720	144	CDD	AVG	16.84	16.80	19.83	23.98	-4.15
	5745	149	CDD	AVG	18.41	18.40	21.42	30.00	-8.58
	5785	157	CDD	AVG	18.39	18.35	21.38	30.00	-8.62
	5825	165	CDD	AVG	18.36	18.38	21.38	30.00	-8.62

Table 7-92. FCC CDD Primary 20MHz BW 802.11a (UNII) Maximum Conducted Output Power (Low Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna WF5b	Antenna 4a	Summed		
	5180	36	CDD	AVG	16.20	16.13	19.18	23.98	-4.80
	5200	40	CDD	AVG	16.85	16.82	19.85	23.98	-4.13
	5240	48	CDD	AVG	16.84	16.77	19.81	23.98	-4.17
	5260	52	CDD	AVG	16.94	16.79	19.88	23.98	-4.10
	5300	60	CDD	AVG	16.89	16.80	19.86	23.98	-4.12
	5320	64	CDD	AVG	16.73	16.64	19.70	23.98	-4.28
	5500	100	CDD	AVG	16.26	16.36	19.32	23.98	-4.66
	5520	104	CDD	AVG	16.85	16.87	19.87	23.98	-4.11
	5580	116	CDD	AVG	16.87	16.85	19.87	23.98	-4.11
	5680	136	CDD	AVG	16.86	16.84	19.86	23.98	-4.12
	5700	140	CDD	AVG	15.77	15.81	18.80	23.98	-5.18
	5720	144	CDD	AVG	16.77	16.76	19.78	23.98	-4.20
	5745	149	CDD	AVG	18.40	18.43	21.42	30.00	-8.58
	5785	157	CDD	AVG	18.45	18.28	21.38	30.00	-8.62
	5825	165	CDD	AVG	18.47	18.29	21.39	30.00	-8.61

Table 7-93. FCC CDD Primary 20MHz BW 802.11a (UNII) Maximum Conducted Output Power (Mid Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 106 of 577

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Ant WF5B	Ant 4a	Summed		
	5180	36	CDD	AVG	15.35	15.48	18.42	23.98	-5.56
	5200	40	CDD	AVG	16.87	17.00	19.95	23.98	-4.03
	5240	48	CDD	AVG	16.81	16.78	19.81	23.98	-4.17
	5260	52	CDD	AVG	16.90	16.81	19.87	23.98	-4.11
	5300	60	CDD	AVG	16.93	16.99	19.97	23.98	-4.01
	5320	64	CDD	AVG	16.50	16.34	19.43	23.98	-4.55
	5500	100	CDD	AVG	14.50	14.37	17.45	23.98	-6.53
	5520	104	CDD	AVG	16.83	16.85	19.85	23.98	-4.13
	5580	116	CDD	AVG	16.72	17.00	19.87	23.98	-4.11
	5680	136	CDD	AVG	16.77	16.92	19.86	23.98	-4.12
	5700	140	CDD	AVG	14.00	14.00	17.01	23.98	-6.97
	5720	144	CDD	AVG	16.89	16.79	19.85	23.98	-4.13
	5745	149	CDD	AVG	18.40	18.32	21.37	30.00	-8.63
	5785	157	CDD	AVG	18.39	18.40	21.41	30.00	-8.59
	5825	165	CDD	AVG	18.40	18.41	21.42	30.00	-8.58

Table 7-94. FCC CDD Primary 20MHz BW 802.11a (UNII) Maximum Conducted Output Power (High Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna WF5b	Antenna 4a	Summed		
	5180	36	CDD	AVG	16.80	16.90	19.86	23.98	-4.12
	5200	40	CDD	AVG	17.00	16.83	19.93	23.98	-4.05
	5240	48	CDD	AVG	17.00	17.00	20.01	23.98	-3.97
	5260	52	CDD	AVG	16.95	16.79	19.88	23.98	-4.10
	5300	60	CDD	AVG	16.93	17.00	19.97	23.98	-4.01
	5320	64	CDD	AVG	16.93	16.82	19.88	23.98	-4.10
	5500	100	CDD	AVG	16.77	16.92	19.86	23.98	-4.12
	5580	116	CDD	AVG	16.90	16.93	19.93	23.98	-4.05
	5720	144	CDD	AVG	16.81	16.84	19.84	23.98	-4.14
	5745	149	CDD	AVG	18.44	18.49	21.48	30.00	-8.52
	5785	157	CDD	AVG	18.43	18.38	21.42	30.00	-8.58
	5825	165	CDD	AVG	18.39	18.41	21.41	30.00	-8.59

Table 7-95. FCC CDD Primary 20MHz BW 802.11n (UNII) Maximum Conducted Output Power (Low Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 107 of 577

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna WF5b	Antenna 4a	Summed		
	5180	36	CDD	AVG	16.06	16.25	19.16	23.98	-4.82
	5200	40	CDD	AVG	17.00	17.00	20.01	23.98	-3.97
	5240	48	CDD	AVG	16.82	16.99	19.91	23.98	-4.07
	5260	52	CDD	AVG	16.88	17.00	19.95	23.98	-4.03
	5300	60	CDD	AVG	16.95	16.99	19.98	23.98	-4.00
	5320	64	CDD	AVG	16.75	16.63	19.70	23.98	-4.28
	5500	100	CDD	AVG	16.37	16.46	19.42	23.98	-4.56
	5520	104	CDD	AVG	16.99	16.93	19.97	23.98	-4.01
	5580	116	CDD	AVG	16.78	16.84	19.82	23.98	-4.16
	5680	136	CDD	AVG	17.00	16.84	19.93	23.98	-4.05
	5700	140	CDD	AVG	15.80	15.81	18.81	23.98	-5.17
	5720	144	CDD	AVG	16.81	16.79	19.81	23.98	-4.17
	5745	149	CDD	AVG	18.35	18.46	21.42	30.00	-8.58
	5785	157	CDD	AVG	18.32	18.47	21.41	30.00	-8.59
	5825	165	CDD	AVG	18.40	18.35	21.39	30.00	-8.61

Table 7-96. FCC CDD Primary 20MHz BW 802.11n (UNII) Maximum Conducted Output Power (Mid Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Ant WF5B	Antenna 4a	Summed		
	5180	36	CDD	AVG	15.44	15.50	18.48	23.98	-5.50
	5200	40	CDD	AVG	16.94	17.00	19.98	23.98	-4.00
	5240	48	CDD	AVG	16.77	17.00	19.90	23.98	-4.08
	5260	52	CDD	AVG	16.91	17.00	19.96	23.98	-4.02
	5300	60	CDD	AVG	16.93	17.00	19.97	23.98	-4.01
	5320	64	CDD	AVG	16.40	16.47	19.44	23.98	-4.54
	5500	100	CDD	AVG	14.40	14.40	17.41	23.98	-6.57
	5520	104	CDD	AVG	16.95	16.90	19.93	23.98	-4.05
	5580	116	CDD	AVG	16.88	16.95	19.93	23.98	-4.05
	5680	136	CDD	AVG	16.99	16.84	19.93	23.98	-4.05
	5700	140	CDD	AVG	13.93	13.75	16.85	23.98	-7.13
	5720	144	CDD	AVG	16.78	16.92	19.86	23.98	-4.12
	5745	149	CDD	AVG	18.46	18.40	21.44	30.00	-8.56
	5785	157	CDD	AVG	18.42	18.46	21.45	30.00	-8.55
	5825	165	CDD	AVG	18.42	18.40	21.42	30.00	-8.58

Table 7-97. FCC CDD Primary 20MHz BW 802.11n (UNII) Maximum Conducted Output Power (High Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 108 of 577

V 10.5 12/15/2021

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna WF5b	Antenna 4a	Summed		
	5180	36	CDD	AVG	16.40	16.50	19.46	23.98	-4.52
	5200	40	CDD	AVG	17.00	16.82	19.92	23.98	-4.06
	5240	48	CDD	AVG	16.94	16.91	19.93	23.98	-4.05
	5260	52	CDD	AVG	16.84	16.92	19.89	23.98	-4.09
	5300	60	CDD	AVG	16.91	16.79	19.86	23.98	-4.12
	5320	64	CDD	AVG	17.00	17.00	20.01	23.98	-3.97
	5500	100	CDD	AVG	17.00	16.99	20.00	23.98	-3.98
	5580	116	CDD	AVG	17.00	16.89	19.96	23.98	-4.02
	5680	136	CDD	AVG	16.79	16.77	19.79	23.98	-4.19
	5700	140	CDD	AVG	15.81	15.82	18.82	23.98	-5.16
	5720	144	CDD	AVG	16.96	16.95	19.96	23.98	-4.02
	5745	149	CDD	AVG	18.42	18.39	21.42	30.00	-8.58
	5785	157	CDD	AVG	18.41	18.41	21.42	30.00	-8.58
	5825	165	CDD	AVG	18.39	18.46	21.44	30.00	-8.56

Table 7-98. FCC CDD Primary 20MHz BW 802.11ax (UNII) Maximum Conducted Output Power (Low Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna WF5b	Antenna 4a	Summed		
	5180	36	CDD	AVG	15.99	16.00	19.00	23.98	-4.98
	5200	40	CDD	AVG	17.00	16.96	19.99	23.98	-3.99
	5240	48	CDD	AVG	16.94	16.79	19.87	23.98	-4.11
	5260	52	CDD	AVG	16.88	16.88	19.89	23.98	-4.09
	5300	60	CDD	AVG	16.93	16.81	19.88	23.98	-4.10
	5320	64	CDD	AVG	16.34	16.42	19.39	23.98	-4.59
	5500	100	CDD	AVG	15.96	16.00	18.99	23.98	-4.99
	5520	104	CDD	AVG	16.81	16.97	19.90	23.98	-4.08
	5580	116	CDD	AVG	16.87	16.92	19.91	23.98	-4.07
	5680	136	CDD	AVG	16.96	16.98	19.98	23.98	-4.00
	5700	140	CDD	AVG	14.73	15.00	17.88	23.98	-6.10
	5720	144	CDD	AVG	16.90	16.98	19.95	23.98	-4.03
	5745	149	CDD	AVG	18.44	18.40	21.43	30.00	-8.57
	5785	157	CDD	AVG	18.48	18.45	21.47	30.00	-8.53
	5825	165	CDD	AVG	18.47	18.28	21.39	30.00	-8.61

Table 7-99. FCC CDD Primary 20MHz BW 802.11ax (UNII) Maximum Conducted Output Power (Mid Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 109 of 577

V 10.5 12/15/2021

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Ant WF5B	Ant 4a	Summed		
	5180	36	CDD	AVG	15.26	15.50	18.39	23.98	-5.59
	5200	40	CDD	AVG	16.99	16.84	19.92	23.98	-4.06
	5240	48	CDD	AVG	16.59	16.91	19.76	23.98	-4.22
	5260	52	CDD	AVG	16.89	17.00	19.95	23.98	-4.03
	5300	60	CDD	AVG	16.99	17.00	20.01	23.98	-3.97
	5320	64	CDD	AVG	15.59	15.75	18.68	23.98	-5.30
	5500	100	CDD	AVG	14.45	14.48	17.48	23.98	-6.50
	5520	104	CDD	AVG	16.90	17.00	19.96	23.98	-4.02
	5580	116	CDD	AVG	16.91	16.87	19.90	23.98	-4.08
	5680	136	CDD	AVG	16.78	17.00	19.90	23.98	-4.08
	5700	140	CDD	AVG	13.94	14.00	16.98	23.98	-7.00
	5720	144	CDD	AVG	16.81	16.95	19.89	23.98	-4.09
	5745	149	CDD	AVG	18.40	18.34	21.38	30.00	-8.62
	5785	157	CDD	AVG	18.39	18.32	21.37	30.00	-8.63
	5825	165	CDD	AVG	18.38	18.40	21.40	30.00	-8.60

Table 7-100. FCC CDD Primary 20MHz BW 802.11ax (UNII) Maximum Conducted Output Power (High Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna WF5b	Antenna 4a	Summed		
	5190	38	CDD	AVG	14.43	14.35	17.40	23.98	-6.58
	5230	46	CDD	AVG	18.40	18.30	21.36	23.98	-2.62
	5270	54	CDD	AVG	18.42	18.29	21.37	23.98	-2.61
	5310	62	CDD	AVG	16.37	16.50	19.44	23.98	-4.54
	5510	102	CDD	AVG	15.32	15.34	18.34	23.98	-5.64
	5590	118	CDD	AVG	18.45	18.44	21.46	23.98	-2.52
	5710	142	CDD	AVG	18.50	18.49	21.51	23.98	-2.47
	5755	151	CDD	AVG	18.42	18.19	21.32	30.00	-8.68
	5795	159	CDD	AVG	18.47	18.23	21.36	30.00	-8.64

Table 7-101. FCC CDD Primary 40MHz BW 802.11n (UNII) Maximum Conducted Output Power (Low Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 110 of 577

V 10.5 12/15/2021

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna WF5b	Antenna 4a	Summed		
	5190	38	CDD	AVG	13.76	13.99	16.89	23.98	-7.09
	5230	46	CDD	AVG	18.42	18.44	21.44	23.98	-2.54
	5270	54	CDD	AVG	18.41	18.44	21.43	23.98	-2.55
	5310	62	CDD	AVG	15.29	15.50	18.41	23.98	-5.57
	5510	102	CDD	AVG	14.41	14.50	17.47	23.98	-6.51
	5550	110	CDD	AVG	17.70	17.89	20.81	23.98	-3.17
	5590	118	CDD	AVG	18.47	18.41	21.45	23.98	-2.53
	5630	126	CDD	AVG	18.44	18.32	21.39	23.98	-2.59
	5670	134	CDD	AVG	17.30	17.50	20.41	23.98	-3.57
	5710	142	CDD	AVG	18.48	18.39	21.45	23.98	-2.53
	5755	151	CDD	AVG	18.49	18.38	21.45	30.00	-8.55
	5795	159	CDD	AVG	18.43	18.36	21.41	30.00	-8.59

Table 7-102. FCC CDD Primary 40MHz BW 802.11n (UNII) Maximum Conducted Output Power (Mid Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Ant WF5B	Ant 4a	Summed		
	5190	38	CDD	AVG	13.45	13.50	16.49	23.98	-7.49
	5230	46	CDD	AVG	18.31	18.13	21.23	23.98	-2.75
	5270	54	CDD	AVG	18.39	18.22	21.31	23.98	-2.67
	5310	62	CDD	AVG	13.65	14.00	16.84	23.98	-7.14
	5510	102	CDD	AVG	12.47	12.37	15.43	23.98	-8.55
	5550	110	CDD	AVG	16.72	16.83	19.79	23.98	-4.19
	5590	118	CDD	AVG	18.40	18.43	21.43	23.98	-2.55
	5630	126	CDD	AVG	17.48	17.88	20.70	23.98	-3.28
	5670	134	CDD	AVG	14.91	14.90	17.91	23.98	-6.07
	5710	142	CDD	AVG	18.45	18.38	21.42	23.98	-2.56
	5755	151	CDD	AVG	18.42	18.40	21.42	30.00	-8.58
	5795	159	CDD	AVG	18.39	18.35	21.38	30.00	-8.62

Table 7-103. FCC CDD Primary 40MHz BW 802.11n (UNII) Maximum Conducted Output Power (High Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 111 of 577

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna WF5b	Antenna 4a	Summed		
	5190	38	CDD	AVG	13.91	13.81	16.87	23.98	-7.11
	5230	46	CDD	AVG	18.44	18.50	21.48	23.98	-2.50
	5270	54	CDD	AVG	18.45	18.36	21.42	23.98	-2.56
	5310	62	CDD	AVG	15.42	15.46	18.45	23.98	-5.53
	5510	102	CDD	AVG	14.50	14.33	17.43	23.98	-6.55
	5550	110	CDD	AVG	17.92	18.00	20.97	23.98	-3.01
	5590	118	CDD	AVG	18.46	18.33	21.41	23.98	-2.57
	5670	134	CDD	AVG	17.88	17.91	20.91	23.98	-3.07
	5710	142	CDD	AVG	18.47	18.39	21.44	23.98	-2.54
	5755	151	CDD	AVG	18.49	18.48	21.50	30.00	-8.50
	5795	159	CDD	AVG	18.45	18.41	21.44	30.00	-8.56

Table 7-104. FCC CDD Primary 40MHz BW 802.11ax (UNII) Maximum Conducted Output Power (Low Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna WF5b	Antenna 4a	Summed		
	5190	38	CDD	AVG	13.75	13.64	16.71	23.98	-7.27
	5230	46	CDD	AVG	18.39	18.23	21.32	23.98	-2.66
	5270	54	CDD	AVG	18.40	18.33	21.38	23.98	-2.60
	5310	62	CDD	AVG	14.82	14.86	17.85	23.98	-6.13
	5510	102	CDD	AVG	13.91	13.93	16.93	23.98	-7.05
	5550	110	CDD	AVG	17.41	17.41	20.42	23.98	-3.56
	5590	118	CDD	AVG	18.45	18.50	21.49	23.98	-2.49
	5630	126	CDD	AVG	18.42	18.29	21.36	23.98	-2.62
	5670	134	CDD	AVG	16.90	17.00	19.96	23.98	-4.02
	5710	142	CDD	AVG	18.39	18.44	21.42	23.98	-2.56
	5755	151	CDD	AVG	18.46	18.41	21.45	30.00	-8.55
	5795	159	CDD	AVG	18.45	18.29	21.38	30.00	-8.62

Table 7-105. FCC CDD Primary 40MHz BW802.11ax (UNII) Maximum Conducted Output Power (Mid Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 112 of 577

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Ant WF5B	Ant 4a	Summed		
	5190	38	CDD	AVG	12.84	12.80	15.83	23.98	-8.15
	5230	46	CDD	AVG	18.49	18.29	21.40	23.98	-2.58
	5270	54	CDD	AVG	18.40	18.29	21.36	23.98	-2.62
	5310	62	CDD	AVG	12.80	12.76	15.79	23.98	-8.19
	5510	102	CDD	AVG	12.32	12.49	15.42	23.98	-8.56
	5550	110	CDD	AVG	16.85	17.00	19.94	23.98	-4.04
	5590	118	CDD	AVG	18.46	18.42	21.45	23.98	-2.53
	5630	126	CDD	AVG	18.25	18.21	21.24	23.98	-2.74
	5670	134	CDD	AVG	14.88	15.00	17.95	23.98	-6.03
	5710	142	CDD	AVG	18.47	18.36	21.42	23.98	-2.56
	5755	151	CDD	AVG	18.42	18.33	21.39	30.00	-8.61
	5795	159	CDD	AVG	18.43	18.42	21.44	30.00	-8.56

Table 7-106. FCC CDD Primary 40MHz BW 802.11ax (UNII) Maximum Conducted Output Power (High Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna WF5b	Antenna 4a	Summed		
	5210	42	CDD	AVG	14.00	14.00	17.01	23.98	-6.97
	5290	58	CDD	AVG	15.50	15.44	18.48	23.98	-5.50
	5530	106	CDD	AVG	14.85	15.00	17.94	23.98	-6.04
	5610	122	CDD	AVG	18.47	18.40	21.45	23.98	-2.53
	5690	138	CDD	AVG	18.49	18.39	21.45	23.98	-2.53
	5775	155	CDD	AVG	17.90	17.95	20.94	30.00	-9.06

Table 7-107. FCC CDD Primary 80MHz BW 802.11ac (UNII) Maximum Conducted Output Power (Low Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna WF5b	Antenna 4a	Summed		
	5210	42	CDD	AVG	13.50	13.32	16.42	23.98	-7.56
	5290	58	CDD	AVG	14.31	14.38	17.36	23.98	-6.62
	5530	106	CDD	AVG	13.89	14.00	16.95	23.98	-7.03
	5610	122	CDD	AVG	17.89	17.92	20.91	23.98	-3.07
	5690	138	CDD	AVG	18.46	18.41	21.45	23.98	-2.53
	5775	155	CDD	AVG	17.98	17.94	20.97	30.00	-9.03

Table 7-108. FCC CDD Primary 80MHz BW 802.11ac (UNII) Maximum Conducted Output Power (Mid Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 113 of 577

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Ant WF5B	Ant 4a	Summed		
	5210	42	CDD	AVG	12.99	12.86	15.93	23.98	-8.05
	5290	58	CDD	AVG	13.92	14.00	16.97	23.98	-7.01
	5530	106	CDD	AVG	12.50	12.41	15.46	23.98	-8.52
	5610	122	CDD	AVG	16.42	16.50	19.47	23.98	-4.51
	5690	138	CDD	AVG	18.43	18.40	21.43	23.98	-2.55
	5775	155	CDD	AVG	16.71	16.55	19.64	30.00	-10.36

Table 7-109. FCC CDD Primary 80MHz BW 802.11ac (UNII) Maximum Conducted Output Power (High Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna WF5b	Antenna 4a	Summed		
	5210	42	CDD	AVG	14.00	13.80	16.91	23.98	-7.07
	5290	58	CDD	AVG	14.26	14.25	17.27	23.98	-6.71
	5530	106	CDD	AVG	14.25	14.10	17.18	23.98	-6.80
	5610	122	CDD	AVG	18.38	18.35	21.37	23.98	-2.61
	5690	138	CDD	AVG	18.41	18.31	21.37	23.98	-2.61
	5775	155	CDD	AVG	17.32	17.50	20.42	30.00	-9.58

Table 7-110. FCC CDD Primary 80MHz BW 802.11ax (UNII) Maximum Conducted Output Power (Low Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna WF5b	Antenna 4a	Summed		
	5210	42	CDD	AVG	12.97	13.00	15.99	23.98	-7.99
	5290	58	CDD	AVG	14.41	14.40	17.42	23.98	-6.56
	5530	106	CDD	AVG	13.31	13.50	16.41	23.98	-7.57
	5610	122	CDD	AVG	17.16	17.32	20.25	23.98	-3.73
	5690	138	CDD	AVG	18.21	18.31	21.27	23.98	-2.71
	5775	155	CDD	AVG	16.18	16.50	19.35	30.00	-10.65

Table 7-111. FCC CDD Primary 80MHz BW 802.11ax (UNII) Maximum Conducted Output Power (Mid Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Ant WF5B	Ant 4a	Summed		
	5210	42	CDD	AVG	12.27	12.36	15.33	23.98	-8.65
	5290	58	CDD	AVG	13.82	13.76	16.80	23.98	-7.18
	5530	106	CDD	AVG	12.42	12.34	15.39	23.98	-8.59
	5610	122	CDD	AVG	16.49	16.33	19.42	23.98	-4.56
	5690	138	CDD	AVG	18.40	18.46	21.44	23.98	-2.54
	5775	155	CDD	AVG	16.35	16.50	19.44	30.00	-10.56

Table 7-112. FCC CDD Primary 80MHz BW 802.11ax (UNII) Maximum Conducted Output Power (High Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 114 of 577

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna WF5b	Antenna 4a	Summed		
	5250	50	CDD	AVG	12.89	12.88	15.90	23.98	-8.08
	5570	114	CDD	AVG	12.33	12.26	15.30	23.98	-8.68

Table 7-113. FCC CDD Primary 160MHz 802.11ac BW (UNII) Maximum Conducted Output Power (Low Data Rate)

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna WF5b	Antenna 4a	Summed		
	5250	50	CDD	AVG	12.50	12.50	15.51	23.98	-8.47
	5570	114	CDD	AVG	12.00	12.00	15.01	23.98	-8.97

Table 7-114. FCC CDD Primary 160MHz 802.11ac BW (UNII) Maximum Conducted Output Power (Mid Data Rate)

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Ant WF5B	Antenna 4a	Summed		
	5250	50	CDD	AVG	11.48	11.38	14.44	23.98	-9.54
	5570	114	CDD	AVG	10.75	11.00	13.89	23.98	-10.09

Table 7-115. FCC CDD Primary 160MHz 802.11ac BW (UNII) Maximum Conducted Output Power (High Data Rate)

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna WF5b	Antenna 4a	Summed		
	5250	50	CDD	AVG	12.89	12.88	15.90	23.98	-8.08
	5570	114	CDD	AVG	12.33	12.26	15.30	23.98	-8.68

Table 7-116. FCC CDD Primary 160MHz 802.11ax BW (UNII) Maximum Conducted Output Power (Low Data Rate)

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna WF5b	Antenna 4a	Summed		
	5250	50	CDD	AVG	12.50	12.50	15.51	23.98	-8.47
	5570	114	CDD	AVG	11.95	11.96	14.97	23.98	-9.01

Table 7-117. FCC CDD Primary 160MHz 802.11ax BW (UNII) Maximum Conducted Output Power (Mid Data Rate)

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Ant WF5B	Antenna 4a	Summed		
	5250	50	CDD	AVG	11.40	11.32	14.37	23.98	-9.61
	5570	114	CDD	AVG	10.46	10.50	13.49	23.98	-10.49

Table 7-118. FCC CDD Primary 160MHz 802.11ax BW (UNII) Maximum Conducted Output Power (High Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 115 of 577

V 10.5 12/15/2021

7.4.8 ISED CDD/SDM Primary Maximum Conducted Output Power Measurements

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF5b	Antenna 4a	Summed						
	5180	36	CDD	AVG	11.12	11.21	14.18	-	-	2.20	16.38	23.01	-6.63
	5200	40	CDD	AVG	11.07	11.13	14.11	-	-	2.20	16.31	23.01	-6.70
	5240	48	CDD	AVG	11.10	11.14	14.13	-	-	2.20	16.33	23.01	-6.68
	5260	52	CDD	AVG	16.89	16.90	19.90	23.98	-4.08	2.00	21.90	30.00	-8.10
	5300	60	CDD	AVG	16.77	17.00	19.90	23.98	-4.08	2.00	21.90	30.00	-8.10
	5320	64	CDD	AVG	17.00	16.93	19.97	23.98	-4.01	2.00	21.97	30.00	-8.03
	5500	100	CDD	AVG	16.84	16.91	19.89	23.98	-4.09	1.20	21.09	30.00	-8.91
	5580	116	CDD	AVG	16.82	16.92	19.88	23.98	-4.10	1.20	21.08	30.00	-8.92
	5720	144	CDD	AVG	16.84	16.80	19.83	23.98	-4.15	1.20	21.03	30.00	-8.97
	5745	149	CDD	AVG	18.41	18.40	21.42	30.00	-8.58	0.40	21.82	-	-
	5785	157	CDD	AVG	18.39	18.35	21.38	30.00	-8.62	0.40	21.78	-	-
	5825	165	CDD	AVG	18.36	18.38	21.38	30.00	-8.62	0.40	21.78	-	-

Table 7-119. ISED CDD 20MHz BW 802.11a (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF5b	Antenna 4a	Summed						
	5180	36	CDD	AVG	11.21	11.06	14.15	-	-	2.20	16.35	23.01	-6.66
	5200	40	CDD	AVG	11.25	11.08	14.18	-	-	2.20	16.38	23.01	-6.63
	5240	48	CDD	AVG	11.25	11.21	14.24	-	-	2.20	16.44	23.01	-6.57
	5260	52	CDD	AVG	16.94	16.79	19.88	23.98	-4.10	2.00	21.88	30.00	-8.12
	5300	60	CDD	AVG	16.89	16.80	19.86	23.98	-4.12	2.00	21.86	30.00	-8.14
	5320	64	CDD	AVG	16.73	16.64	19.70	23.98	-4.28	2.00	21.70	30.00	-8.30
	5500	100	CDD	AVG	16.26	16.36	19.32	23.98	-4.66	1.20	20.52	30.00	-9.48
	5520	104	CDD	AVG	16.85	16.87	19.87	23.98	-4.11	1.20	21.07	30.00	-8.93
	5580	116	CDD	AVG	16.87	16.85	19.87	23.98	-4.11	1.20	21.07	30.00	-8.93
	5680	136	CDD	AVG	16.86	16.84	19.86	23.98	-4.12	1.20	21.06	30.00	-8.94
	5700	140	CDD	AVG	15.77	15.81	18.80	23.98	-5.18	1.20	20.00	30.00	-10.00
	5720	144	CDD	AVG	16.77	16.76	19.78	23.98	-4.20	1.20	20.98	30.00	-9.02
	5745	149	CDD	AVG	18.40	18.43	21.42	30.00	-8.58	0.40	21.82	-	-
	5785	157	CDD	AVG	18.45	18.28	21.38	30.00	-8.62	0.40	21.78	-	-
	5825	165	CDD	AVG	18.47	18.29	21.39	30.00	-8.61	0.40	21.79	-	-

Table 7-120. ISED CDD 20MHz BW 802.11a (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF5b	Antenna 4a	Summed						
	5180	36	CDD	AVG	11.17	11.09	14.14	-	-	2.20	16.34	23.01	-6.67
	5200	40	CDD	AVG	11.25	11.09	14.18	-	-	2.20	16.38	23.01	-6.63
	5240	48	CDD	AVG	11.25	11.20	14.24	-	-	2.20	16.44	23.01	-6.57
	5260	52	CDD	AVG	16.90	16.81	19.87	23.98	-4.11	2.00	21.87	30.00	-8.13
	5300	60	CDD	AVG	16.93	16.99	19.97	23.98	-4.01	2.00	21.97	30.00	-8.03
	5320	64	CDD	AVG	16.50	16.34	19.43	23.98	-4.55	2.00	21.43	30.00	-8.57
	5500	100	CDD	AVG	14.50	14.37	17.45	23.98	-6.53	1.20	18.65	30.00	-11.35
	5520	104	CDD	AVG	16.83	16.85	19.85	23.98	-4.13	1.20	21.05	30.00	-8.95
	5580	116	CDD	AVG	16.72	17.00	19.87	23.98	-4.11	1.20	21.07	30.00	-8.93
	5680	136	CDD	AVG	16.77	16.92	19.86	23.98	-4.12	1.20	21.06	30.00	-8.94
	5700	140	CDD	AVG	14.00	14.00	17.01	23.98	-6.97	1.20	18.21	30.00	-11.79
	5720	144	CDD	AVG	16.89	16.79	19.85	23.98	-4.13	1.20	21.05	30.00	-8.95
	5745	149	CDD	AVG	18.40	18.32	21.37	30.00	-8.63	0.40	21.77	-	-
	5785	157	CDD	AVG	18.39	18.40	21.41	30.00	-8.59	0.40	21.81	-	-
	5825	165	CDD	AVG	18.40	18.41	21.42	30.00	-8.58	0.40	21.82	-	-

Table 7-121. ISED CDD 20MHz BW 802.11a (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 116 of 577

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WFSb	Antenna 4a	Summed						
	5180	36	SDM	AVG	14.25	14.00	17.14	-	-	1.13	18.27	23.01	-4.74
	5200	40	SDM	AVG	14.21	14.06	17.14	-	-	1.13	18.27	23.01	-4.74
	5240	48	SDM	AVG	14.18	14.01	17.10	-	-	1.13	18.23	23.01	-4.78
	5260	52	CDD	AVG	16.84	16.92	19.89	23.98	-4.09	2.00	21.89	30.00	-8.11
	5300	60	CDD	AVG	16.91	16.79	19.86	23.98	-4.12	2.00	21.86	30.00	-8.14
	5320	64	CDD	AVG	17.00	17.00	20.01	23.98	-3.97	2.00	22.01	30.00	-7.99
	5500	100	CDD	AVG	17.00	16.99	20.00	23.98	-3.98	1.20	21.20	30.00	-8.80
	5580	116	CDD	AVG	17.00	16.89	19.96	23.98	-4.02	1.20	21.16	30.00	-8.84
	5680	136	CDD	AVG	16.79	16.77	19.79	23.98	-4.19	1.20	20.99	30.00	-9.01
	5700	140	CDD	AVG	15.81	15.82	18.82	23.98	-5.16	1.20	20.02	30.00	-9.98
	5720	144	CDD	AVG	16.96	16.95	19.96	23.98	-4.02	1.20	21.16	30.00	-8.84
	5745	149	CDD	AVG	18.42	18.39	21.42	30.00	-8.58	0.40	21.82	-	-
	5785	157	CDD	AVG	18.41	18.41	21.42	30.00	-8.58	0.40	21.82	-	-
	5825	165	CDD	AVG	18.39	18.46	21.44	30.00	-8.56	0.40	21.84	-	-

Table 7-122. ISED CDD/SDM 20MHz BW 802.11n (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WFSb	Antenna 4a	Summed						
	5180	36	SDM	AVG	14.19	14.25	17.23	-	-	1.13	18.36	23.01	-4.65
	5200	40	SDM	AVG	14.12	14.25	17.20	-	-	1.13	18.33	23.01	-4.68
	5240	48	SDM	AVG	14.25	14.25	17.26	-	-	1.13	18.39	23.01	-4.62
	5260	52	CDD	AVG	16.88	17.00	19.95	23.98	-4.03	2.00	21.95	30.00	-8.05
	5300	60	CDD	AVG	16.95	16.99	19.98	23.98	-4.00	2.00	21.98	30.00	-8.02
	5320	64	CDD	AVG	16.75	16.63	19.70	23.98	-4.28	2.00	21.70	30.00	-8.30
	5500	100	CDD	AVG	16.37	16.46	19.42	23.98	-4.56	1.20	20.62	30.00	-9.38
	5520	104	CDD	AVG	16.99	16.93	19.97	23.98	-4.01	1.20	21.17	30.00	-8.83
	5580	116	CDD	AVG	16.78	16.84	19.82	23.98	-4.16	1.20	21.02	30.00	-8.98
	5680	136	CDD	AVG	17.00	16.84	19.93	23.98	-4.05	1.20	21.13	30.00	-8.87
	5700	140	CDD	AVG	15.80	15.81	18.81	23.98	-5.17	1.20	20.01	30.00	-9.99
	5720	144	CDD	AVG	16.81	16.79	19.81	23.98	-4.17	1.20	21.01	30.00	-8.99
	5745	149	CDD	AVG	18.35	18.46	21.42	30.00	-8.58	0.40	21.82	-	-
	5785	157	CDD	AVG	18.32	18.47	21.41	30.00	-8.59	0.40	21.81	-	-
	5825	165	CDD	AVG	18.40	18.35	21.39	30.00	-8.61	0.40	21.79	-	-

Table 7-123. ISED CDD/SDM 20MHz BW 802.11n (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WFSb	Antenna 4a	Summed						
	5180	36	SDM	AVG	14.03	14.25	17.15	-	-	1.13	18.28	23.01	-4.73
	5200	40	SDM	AVG	14.03	14.20	17.12	-	-	1.13	18.25	23.01	-4.76
	5240	48	SDM	AVG	14.17	14.15	17.17	-	-	1.13	18.30	23.01	-4.71
	5260	52	CDD	AVG	16.91	17.00	19.96	23.98	-4.02	2.00	21.96	30.00	-8.04
	5300	60	CDD	AVG	16.93	17.00	19.97	23.98	-4.01	2.00	21.97	30.00	-8.03
	5320	64	CDD	AVG	16.40	16.47	19.44	23.98	-4.54	2.00	21.44	30.00	-8.56
	5500	100	CDD	AVG	14.40	14.40	17.41	23.98	-6.57	1.20	18.61	30.00	-11.39
	5520	104	CDD	AVG	16.95	16.90	19.93	23.98	-4.05	1.20	21.13	30.00	-8.87
	5580	116	CDD	AVG	16.88	16.95	19.93	23.98	-4.05	1.20	21.13	30.00	-8.87
	5680	136	CDD	AVG	16.99	16.84	19.93	23.98	-4.05	1.20	21.13	30.00	-8.87
	5700	140	CDD	AVG	13.93	13.75	16.85	23.98	-7.13	1.20	18.05	30.00	-11.95
	5720	144	CDD	AVG	16.78	16.92	19.86	23.98	-4.12	1.20	21.06	30.00	-8.94
	5745	149	CDD	AVG	18.46	18.40	21.44	30.00	-8.56	0.40	21.84	-	-
	5785	157	CDD	AVG	18.42	18.46	21.45	30.00	-8.55	0.40	21.85	-	-
	5825	165	CDD	AVG	18.42	18.40	21.42	30.00	-8.58	0.40	21.82	-	-

Table 7-124. ISED CDD/SDM 20MHz BW 802.11n (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 117 of 577

V 10.5 12/15/2021

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF5b	Antenna 4a	Summed						
	5180	36	SDM	AVG	14.25	14.00	17.14	-	-	1.13	18.27	23.01	-4.74
	5200	40	SDM	AVG	14.21	14.06	17.14	-	-	1.13	18.27	23.01	-4.74
	5240	48	SDM	AVG	14.18	14.01	17.10	-	-	1.13	18.23	23.01	-4.78
	5260	52	CDD	AVG	16.84	16.92	19.89	23.98	-4.09	2.00	21.89	30.00	-8.11
	5300	60	CDD	AVG	16.91	16.79	19.86	23.98	-4.12	2.00	21.86	30.00	-8.14
	5320	64	CDD	AVG	17.00	17.00	20.01	23.98	-3.97	2.00	22.01	30.00	-7.99
	5500	100	CDD	AVG	17.00	16.99	20.00	23.98	-3.98	1.20	21.20	30.00	-8.80
	5580	116	CDD	AVG	17.00	16.89	19.96	23.98	-4.02	1.20	21.16	30.00	-8.84
	5680	136	CDD	AVG	16.79	16.77	19.79	23.98	-4.19	1.20	20.99	30.00	-9.01
	5700	140	CDD	AVG	15.81	15.82	18.82	23.98	-5.16	1.20	20.02	30.00	-9.98
	5720	144	CDD	AVG	16.96	16.95	19.96	23.98	-4.02	1.20	21.16	30.00	-8.84
	5745	149	CDD	AVG	18.42	18.39	21.42	30.00	-8.58	0.40	21.82	-	-
	5785	157	CDD	AVG	18.41	18.41	21.42	30.00	-8.58	0.40	21.82	-	-
	5825	165	CDD	AVG	18.39	18.46	21.44	30.00	-8.56	0.40	21.84	-	-

Table 7-125. ISSED CDD/SDM 20MHz BW 802.11ax (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF5b	Antenna 4a	Summed						
	5180	36	SDM	AVG	14.13	13.95	17.05	-	-	1.13	18.18	23.01	-4.83
	5200	40	SDM	AVG	14.09	14.15	17.13	-	-	1.13	18.26	23.01	-4.75
	5240	48	SDM	AVG	14.25	14.09	17.18	-	-	1.13	18.31	23.01	-4.70
	5260	52	CDD	AVG	16.88	16.88	19.89	23.98	-4.09	2.00	21.89	30.00	-8.11
	5300	60	CDD	AVG	16.93	16.81	19.88	23.98	-4.10	2.00	21.88	30.00	-8.12
	5320	64	CDD	AVG	16.34	16.42	19.39	23.98	-4.59	2.00	21.39	30.00	-8.61
	5500	100	CDD	AVG	15.96	16.00	18.99	23.98	-4.99	1.20	20.19	30.00	-9.81
	5520	104	CDD	AVG	16.81	16.97	19.90	23.98	-4.08	1.20	21.10	30.00	-8.90
	5580	116	CDD	AVG	16.87	16.92	19.91	23.98	-4.07	1.20	21.11	30.00	-8.89
	5680	136	CDD	AVG	16.96	16.98	19.98	23.98	-4.00	1.20	21.18	30.00	-8.82
	5700	140	CDD	AVG	14.73	15.00	17.88	23.98	-6.10	1.20	19.08	30.00	-10.92
	5720	144	CDD	AVG	16.90	16.98	19.95	23.98	-4.03	1.20	21.15	30.00	-8.85
	5745	149	CDD	AVG	18.44	18.40	21.43	30.00	-8.57	0.40	21.83	-	-
	5785	157	CDD	AVG	18.48	18.45	21.47	30.00	-8.53	0.40	21.87	-	-
	5825	165	CDD	AVG	18.47	18.28	21.39	30.00	-8.61	0.40	21.79	-	-

Table 7-126. ISSED CDD/SDM 20MHz BW 802.11ax (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF5b	Antenna 4a	Summed						
	5180	36	SDM	AVG	14.25	14.12	17.19	-	-	1.13	18.32	23.01	-4.69
	5200	40	SDM	AVG	14.25	14.24	17.26	-	-	1.13	18.39	23.01	-4.62
	5240	48	SDM	AVG	14.08	14.17	17.13	-	-	1.13	18.26	23.01	-4.75
	5260	52	CDD	AVG	16.89	17.00	19.95	23.98	-4.03	2.00	21.95	30.00	-8.05
	5300	60	CDD	AVG	16.99	17.00	20.01	23.98	-3.97	2.00	22.01	30.00	-7.99
	5320	64	CDD	AVG	15.59	15.75	18.68	23.98	-5.30	2.00	20.68	30.00	-9.32
	5500	100	CDD	AVG	14.45	14.48	17.48	23.98	-6.50	1.20	18.68	30.00	-11.32
	5520	104	CDD	AVG	16.90	17.00	19.96	23.98	-4.02	1.20	21.16	30.00	-8.84
	5580	116	CDD	AVG	16.91	16.87	19.90	23.98	-4.08	1.20	21.10	30.00	-8.90
	5680	136	CDD	AVG	16.78	17.00	19.90	23.98	-4.08	1.20	21.10	30.00	-8.90
	5700	140	CDD	AVG	13.94	14.00	16.98	23.98	-7.00	1.20	18.18	30.00	-11.82
	5720	144	CDD	AVG	16.81	16.95	19.89	23.98	-4.09	1.20	21.09	30.00	-8.91
	5745	149	CDD	AVG	18.40	18.34	21.38	30.00	-8.62	0.40	21.78	-	-
	5785	157	CDD	AVG	18.39	18.32	21.37	30.00	-8.63	0.40	21.77	-	-
	5825	165	CDD	AVG	18.38	18.40	21.40	30.00	-8.60	0.40	21.80	-	-

Table 7-127. ISSED CDD/SDM 20MHz BW 802.11ax (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 118 of 577

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WFSb	Antenna 4a	Summed						
	5190	38	SDM	AVG	14.28	14.30	17.30	-	-	1.13	18.43	23.01	-4.58
	5230	46	SDM	AVG	16.75	16.66	19.72	-	-	1.13	20.85	23.01	-2.16
	5270	54	CDD	AVG	18.42	18.29	21.37	23.98	-2.61	2.00	23.37	30.00	-6.63
	5310	62	CDD	AVG	16.37	16.50	19.44	23.98	-4.54	2.00	21.44	30.00	-8.56
	5510	102	CDD	AVG	15.32	15.34	18.34	23.98	-5.64	1.20	19.54	30.00	-10.46
	5550	110	CDD	AVG	18.42	18.36	21.40	23.98	-2.58	1.20	22.60	30.00	-7.40
	5710	142	CDD	AVG	18.50	18.49	21.51	23.98	-2.47	1.20	22.71	30.00	-7.29
	5755	151	CDD	AVG	18.42	18.19	21.32	30.00	-8.68	0.40	21.72	-	-
	5795	159	CDD	AVG	18.47	18.23	21.36	30.00	-8.64	0.40	21.76	-	-

Table 7-128. ISED CDD/SDM 40MHz BW 802.11n (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WFSb	Antenna 4a	Summed						
	5190	38	SDM	AVG	13.94	13.76	16.86	-	-	1.13	17.99	23.01	-5.02
	5230	46	SDM	AVG	16.75	16.70	19.73	-	-	1.13	20.86	23.01	-2.15
	5270	54	CDD	AVG	18.41	18.44	21.43	23.98	-2.55	2.00	23.43	30.00	-6.57
	5310	62	CDD	AVG	15.29	15.50	18.41	23.98	-5.57	2.00	20.41	30.00	-9.59
	5510	102	CDD	AVG	14.41	14.50	17.47	23.98	-6.51	1.20	18.67	30.00	-11.33
	5550	110	CDD	AVG	17.70	17.89	20.81	23.98	-3.17	1.20	22.01	30.00	-7.99
	5590	118	CDD	AVG	18.47	18.41	21.45	23.98	-2.53	1.20	22.65	30.00	-7.35
	5630	126	CDD	AVG	18.44	18.32	21.39	23.98	-2.59	1.20	22.59	30.00	-7.41
	5670	134	CDD	AVG	17.30	17.50	20.41	23.98	-3.57	1.20	21.61	30.00	-8.39
	5710	142	CDD	AVG	18.48	18.39	21.45	23.98	-2.53	1.20	22.65	30.00	-7.35
	5755	151	CDD	AVG	18.49	18.38	21.45	30.00	-8.55	0.40	21.85	-	-
	5795	159	CDD	AVG	18.43	18.36	21.41	30.00	-8.59	0.40	21.81	-	-

Table 7-129. ISED CDD/SDM 40MHz BW 802.11n (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WFSb	Antenna 4a	Summed						
	5190	38	CDD	AVG	13.33	13.50	16.42	-	-	2.20	18.62	23.01	-4.39
	5230	46	SDM	AVG	16.55	16.66	19.61	-	-	1.13	20.74	23.01	-2.27
	5270	54	CDD	AVG	18.39	18.22	21.31	23.98	-2.67	2.00	23.31	30.00	-6.69
	5310	62	CDD	AVG	13.65	14.00	16.84	23.98	-7.14	2.00	18.84	30.00	-11.16
	5510	102	CDD	AVG	12.47	12.37	15.43	23.98	-8.55	1.20	16.63	30.00	-13.37
	5550	110	CDD	AVG	16.72	16.83	19.79	23.98	-4.19	1.20	20.99	30.00	-9.01
	5590	118	CDD	AVG	18.40	18.43	21.43	23.98	-2.55	1.20	22.63	30.00	-7.37
	5630	126	CDD	AVG	17.48	17.88	20.70	23.98	-3.28	1.20	21.90	30.00	-8.10
	5670	134	CDD	AVG	14.91	14.90	17.91	23.98	-6.07	1.20	19.11	30.00	-10.89
	5710	142	CDD	AVG	18.45	18.38	21.42	23.98	-2.56	1.20	22.62	30.00	-7.38
	5755	151	CDD	AVG	18.42	18.40	21.42	30.00	-8.58	0.40	21.82	-	-
	5795	159	CDD	AVG	18.39	18.35	21.38	30.00	-8.62	0.40	21.78	-	-

Table 7-130. ISED CDD/SDM 40MHz BW 802.11n (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 119 of 577

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WFSb	Antenna 4a	Summed						
	5190	38	SDM	AVG	13.95	13.81	16.89	-	-	1.13	18.02	23.01	-4.99
	5230	46	SDM	AVG	16.70	16.61	19.67	-	-	1.13	20.80	23.01	-2.21
	5270	54	CDD	AVG	18.45	18.36	21.42	23.98	-2.56	2.00	23.42	30.00	-6.58
	5310	62	CDD	AVG	15.42	15.46	18.45	23.98	-5.53	2.00	20.45	30.00	-9.55
	5510	102	CDD	AVG	14.50	14.33	17.43	23.98	-6.55	1.20	18.63	30.00	-11.37
	5550	110	CDD	AVG	17.92	18.00	20.97	23.98	-3.01	1.20	22.17	30.00	-7.83
	5590	118	CDD	AVG	18.46	18.33	21.41	23.98	-2.57	1.20	22.61	30.00	-7.39
	5630	126	CDD	AVG	18.02	18.42	21.24	23.98	-2.74	1.20	22.44	30.00	-7.56
	5670	134	CDD	AVG	17.23	17.91	20.60	23.98	-3.38	1.20	21.80	30.00	-8.20
	5710	142	CDD	AVG	18.47	18.39	21.44	23.98	-2.54	1.20	22.64	30.00	-7.36
	5755	151	CDD	AVG	18.49	18.48	21.50	30.00	-8.50	0.40	21.90	-	-
	5795	159	CDD	AVG	18.45	18.41	21.44	30.00	-8.56	0.40	21.84	-	-

Table 7-131. ISED CDD/SDM 40MHz BW 802.11ax (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WFSb	Antenna 4a	Summed						
	5190	38	CDD	AVG	13.75	13.71	16.74	-	-	2.20	18.94	23.01	-4.07
	5230	46	SDM	AVG	16.75	16.52	19.64	-	-	1.13	20.77	23.01	-2.24
	5270	54	CDD	AVG	18.40	18.33	21.38	23.98	-2.60	2.00	23.38	30.00	-6.62
	5310	62	CDD	AVG	14.82	14.86	17.85	23.98	-6.13	2.00	19.85	30.00	-10.15
	5510	102	CDD	AVG	13.91	13.93	16.93	23.98	-7.05	1.20	18.13	30.00	-11.87
	5550	110	CDD	AVG	17.41	17.41	20.42	23.98	-3.56	1.20	21.62	30.00	-8.38
	5590	118	CDD	AVG	18.45	18.50	21.49	23.98	-2.49	1.20	22.69	30.00	-7.31
	5630	126	CDD	AVG	18.42	18.29	21.36	23.98	-2.62	1.20	22.56	30.00	-7.44
	5670	134	CDD	AVG	16.90	17.00	19.96	23.98	-4.02	1.20	21.16	30.00	-8.84
	5710	142	CDD	AVG	18.39	18.44	21.42	23.98	-2.56	1.20	22.62	30.00	-7.38
	5755	151	CDD	AVG	18.46	18.41	21.45	30.00	-8.55	0.40	21.85	-	-
	5795	159	CDD	AVG	18.45	18.29	21.38	30.00	-8.62	0.40	21.78	-	-

Table 7-132. ISED CDD/SDM 40MHz BW 802.11ax (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WFSb	Antenna 4a	Summed						
	5190	38	CDD	AVG	12.75	12.91	15.84	-	-	2.20	18.04	23.01	-4.97
	5230	46	SDM	AVG	16.61	16.75	19.69	-	-	1.13	20.82	23.01	-2.19
	5270	54	CDD	AVG	18.40	18.29	21.36	23.98	-2.62	2.00	23.36	30.00	-6.64
	5310	62	CDD	AVG	12.80	12.76	15.79	23.98	-8.19	2.00	17.79	30.00	-12.21
	5510	102	CDD	AVG	12.32	12.49	15.42	23.98	-8.56	1.20	16.62	30.00	-13.38
	5550	110	CDD	AVG	16.85	17.00	19.94	23.98	-4.04	1.20	21.14	30.00	-8.86
	5590	118	CDD	AVG	18.46	18.42	21.45	23.98	-2.53	1.20	22.65	30.00	-7.35
	5630	126	CDD	AVG	17.78	18.21	21.01	23.98	-2.97	1.20	22.21	30.00	-7.79
	5670	134	CDD	AVG	14.88	15.00	17.95	23.98	-6.03	1.20	19.15	30.00	-10.85
	5710	142	CDD	AVG	18.47	18.36	21.42	23.98	-2.56	1.20	22.62	30.00	-7.38
	5755	151	CDD	AVG	18.42	18.33	21.39	30.00	-8.61	0.40	21.79	-	-
	5795	159	CDD	AVG	18.43	18.42	21.44	30.00	-8.56	0.40	21.84	-	-

Table 7-133. ISED CDD/SDM 40MHz BW 802.11ax (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 120 of 577

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF5b	Antenna 4a	Summed						
	5210	42	CDD	AVG	14.00	14.00	17.01	-	-	2.20	19.21	23.01	-3.80
	5290	58	CDD	AVG	15.50	15.44	18.48	23.98	-5.50	2.00	20.48	30.00	-9.52
	5530	106	CDD	AVG	14.85	15.00	17.94	23.98	-6.04	1.20	19.14	30.00	-10.86
	5690	138	CDD	AVG	18.49	18.39	21.45	23.98	-2.53	1.20	22.65	30.00	-7.35
	5775	155	CDD	AVG	17.90	17.95	20.94	30.00	-9.06	0.40	21.34	-	-

Table 7-134. ISED CDD 80MHz BW 802.11ac (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF5b	Antenna 4a	Summed						
	5210	42	CDD	AVG	13.50	13.32	16.42	-	-	2.20	18.62	23.01	-4.39
	5290	58	CDD	AVG	14.31	14.38	17.36	23.98	-6.62	2.00	19.36	30.00	-10.64
	5530	106	CDD	AVG	13.89	14.00	16.95	23.98	-7.03	1.20	18.15	30.00	-11.85
	5690	138	CDD	AVG	18.46	18.41	21.45	23.98	-2.53	1.20	22.65	30.00	-7.35
	5775	155	CDD	AVG	17.98	17.94	20.97	30.00	-9.03	0.40	21.37	-	-

Table 7-135. ISED CDD 80MHz BW 802.11ac (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF5b	Antenna 4a	Summed						
	5210	42	CDD	AVG	12.86	12.79	15.84	-	-	2.20	18.04	23.01	-4.97
	5290	58	CDD	AVG	13.92	14.00	16.97	23.98	-7.01	2.00	18.97	30.00	-11.03
	5530	106	CDD	AVG	12.50	12.41	15.46	23.98	-8.52	1.20	16.66	30.00	-13.34
	5690	138	CDD	AVG	18.43	18.40	21.43	23.98	-2.55	1.20	22.63	30.00	-7.37
	5775	155	CDD	AVG	16.71	16.55	19.64	30.00	-10.36	0.40	20.04	-	-

Table 7-136. ISED CDD/SDM80MHz BW 802.11ac (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF5b	Antenna 4a	Summed						
	5210	42	CDD	AVG	14.00	13.80	16.91	-	-	2.20	19.11	23.01	-3.90
	5290	58	CDD	AVG	14.26	14.25	17.27	23.98	-6.71	2.00	19.27	30.00	-10.73
	5530	106	CDD	AVG	14.25	14.10	17.18	23.98	-6.80	1.20	18.38	30.00	-11.62
	5690	138	CDD	AVG	18.41	18.31	21.37	23.98	-2.61	1.20	22.57	30.00	-7.43
	5775	155	CDD	AVG	17.32	17.50	20.42	30.00	-9.58	0.40	20.82	-	-

Table 7-137. ISED CDD/SDM 80MHz BW 802.11ax (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF5b	Antenna 4a	Summed						
	5210	42	CDD	AVG	12.82	12.87	15.85	-	-	2.20	18.05	23.01	-4.96
	5290	58	CDD	AVG	14.41	14.40	17.42	23.98	-6.56	2.00	19.42	30.00	-10.58
	5530	106	CDD	AVG	13.31	13.50	16.41	23.98	-7.57	1.20	17.61	30.00	-12.39
	5690	138	CDD	AVG	18.35	18.31	21.34	23.98	-2.64	1.20	22.54	30.00	-7.46
	5775	155	CDD	AVG	16.18	16.50	19.35	30.00	-10.65	0.40	19.75	-	-

Table 7-138. ISED CDD/SDM 80MHz BW 802.11ax (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF5b	Antenna 4a	Summed						
	5210	42	CDD	AVG	12.50	12.30	15.41	-	-	2.20	17.61	23.01	-5.40
	5290	58	CDD	AVG	13.82	13.76	16.80	23.98	-7.18	2.00	18.80	30.00	-11.20
	5530	106	CDD	AVG	12.42	12.34	15.39	23.98	-8.59	1.20	16.59	30.00	-13.41
	5690	138	CDD	AVG	18.40	18.46	21.44	23.98	-2.54	1.20	22.64	30.00	-7.36
	5775	155	CDD	AVG	16.35	16.50	19.44	30.00	-10.56	0.40	19.84	-	-

Table 7-139. ISED CDD/SDM 80MHz BW 802.11ax (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 121 of 577

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF5b	Antenna 4a	Summed						
	5250	50	CDD	AVG	13.00	12.96	15.99	23.98	-11.02	2.20	18.19	23.01	-4.82

Table 7-140. ISCED CDD/SDM160MHz BW 802.11ac (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF5b	Antenna 4a	Summed						
	5250	50	CDD	AVG	12.49	12.46	15.48	23.98	-11.52	2.20	17.68	23.01	-5.33

Table 7-141. ISCED CDD/SDM160MHz BW 802.11ac (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF5b	Antenna 4a	Summed						
	5250	50	CDD	AVG	11.48	11.28	14.39	23.98	-12.70	2.20	16.59	23.01	-6.42

Table 7-142. ISCED CDD/SDM160MHz BW 802.11ac (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF5b	Antenna 4a	Summed						
	5250	50	CDD	AVG	12.91	12.89	15.91	23.98	-11.09	2.20	18.11	23.01	-4.90

Table 7-143. ISCED CDD/SDM160MHz BW 802.11ax (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF5b	Antenna 4a	Summed						
	5250	50	CDD	AVG	12.49	12.46	15.48	23.98	-11.52	2.20	17.68	23.01	-5.33

Table 7-144. ISCED CDD/SDM160MHz BW 802.11ax (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF5b	Antenna 4a	Summed						
	5250	50	CDD	AVG	11.38	11.50	14.45	23.98	-12.48	2.20	16.65	23.01	-6.36

Table 7-145. ISCED CDD/SDM160MHz BW 802.11ax (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 122 of 577

7.4.9 FCC CDD Diversity Maximum Conducted Output Power Measurements

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 4a	Antenna 2a	Summed		
	5180	36	CDD	AVG	17.00	16.96	19.99	23.98	-3.99
	5200	40	CDD	AVG	17.00	16.98	20.00	23.98	-3.98
	5240	48	CDD	AVG	17.00	16.99	20.00	23.98	-3.98
	5260	52	CDD	AVG	16.90	16.95	19.94	23.98	-4.04
	5300	60	CDD	AVG	17.00	17.00	20.01	23.98	-3.97
	5320	64	CDD	AVG	16.93	16.79	19.87	23.98	-4.11
	5500	100	CDD	AVG	16.91	16.92	19.93	23.98	-4.05
	5580	116	CDD	AVG	16.92	16.76	19.85	23.98	-4.13
	5720	144	CDD	AVG	16.80	16.81	19.81	23.98	-4.17
	5745	149	CDD	AVG	18.45	18.42	21.45	30.00	-8.55
	5785	157	CDD	AVG	18.40	18.48	21.45	30.00	-8.55
	5825	165	CDD	AVG	18.37	18.48	21.44	30.00	-8.56

Table 7-146. FCC CDD Diversity 20MHz BW 802.11a (UNII) Maximum Conducted Output Power (Low Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 4a	Antenna 2a	Summed		
	5180	36	CDD	AVG	16.13	16.19	19.17	23.98	-4.81
	5200	40	CDD	AVG	16.82	16.89	19.87	23.98	-4.11
	5240	48	CDD	AVG	16.77	16.75	19.77	23.98	-4.21
	5260	52	CDD	AVG	16.79	17.00	19.91	23.98	-4.07
	5300	60	CDD	AVG	16.80	17.00	19.91	23.98	-4.07
	5320	64	CDD	AVG	16.64	16.50	19.58	23.98	-4.40
	5500	100	CDD	AVG	16.36	16.41	19.39	23.98	-4.59
	5520	104	CDD	AVG	16.87	16.89	19.89	23.98	-4.09
	5580	116	CDD	AVG	16.85	16.92	19.90	23.98	-4.08
	5680	136	CDD	AVG	16.84	16.88	19.87	23.98	-4.11
	5700	140	CDD	AVG	15.81	15.98	18.91	23.98	-5.07
	5720	144	CDD	AVG	16.76	16.95	19.86	23.98	-4.12
	5745	149	CDD	AVG	18.43	18.45	21.45	30.00	-8.55
	5785	157	CDD	AVG	18.28	18.39	21.35	30.00	-8.65
	5825	165	CDD	AVG	18.29	18.40	21.36	30.00	-8.64

Table 7-147. FCC CDD Diversity 20MHz BW 802.11a (UNII) Maximum Conducted Output Power (Mid Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 123 of 577

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 4a	Antenna 2a	Summed		
	5180	36	CDD	AVG	15.48	15.50	18.50	23.98	-5.48
	5200	40	CDD	AVG	17.00	16.90	19.96	23.98	-4.02
	5240	48	CDD	AVG	16.78	16.97	19.89	23.98	-4.09
	5260	52	CDD	AVG	16.81	16.83	19.83	23.98	-4.15
	5300	60	CDD	AVG	16.99	17.00	20.00	23.98	-3.98
	5320	64	CDD	AVG	16.34	16.46	19.41	23.98	-4.57
	5500	100	CDD	AVG	14.37	14.50	17.45	23.98	-6.53
	5520	104	CDD	AVG	16.85	16.82	19.85	23.98	-4.13
	5580	116	CDD	AVG	17.00	16.89	19.96	23.98	-4.02
	5680	136	CDD	AVG	16.92	16.89	19.92	23.98	-4.06
	5700	140	CDD	AVG	14.00	13.88	16.95	23.98	-7.03
	5720	144	CDD	AVG	16.79	16.80	19.81	23.98	-4.17
	5745	149	CDD	AVG	18.32	18.40	21.37	30.00	-8.63
	5785	157	CDD	AVG	18.20	18.45	21.34	30.00	-8.66
	5825	165	CDD	AVG	18.21	18.31	21.27	30.00	-8.73

Table 7-148. FCC CDD Diversity 20MHz BW 802.11a (UNII) Maximum Conducted Output Power (High Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 4a	Antenna 2a	Summed		
	5180	36	CDD	AVG	16.90	16.93	19.93	23.98	-4.05
	5200	40	CDD	AVG	16.83	16.90	19.88	23.98	-4.10
	5240	48	CDD	AVG	17.00	16.82	19.92	23.98	-4.06
	5260	52	CDD	AVG	16.79	16.87	19.84	23.98	-4.14
	5300	60	CDD	AVG	17.00	17.00	20.01	23.98	-3.97
	5320	64	CDD	AVG	16.82	17.00	19.92	23.98	-4.06
	5500	100	CDD	AVG	16.92	16.81	19.87	23.98	-4.11
	5580	116	CDD	AVG	16.93	17.00	19.98	23.98	-4.00
	5720	144	CDD	AVG	16.84	16.95	19.91	23.98	-4.07
	5745	149	CDD	AVG	18.49	18.45	21.48	30.00	-8.52
	5785	157	CDD	AVG	18.40	18.39	21.41	30.00	-8.59
	5825	165	CDD	AVG	18.41	18.45	21.44	30.00	-8.56

Table 7-149. FCC CDD Diversity 20MHz BW 802.11n (UNII) Maximum Conducted Output Power (Low Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 124 of 577

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 4a	Antenna 2a	Summed		
	5180	36	CDD	AVG	16.25	16.08	19.17	23.98	-4.81
	5200	40	CDD	AVG	17.00	16.88	19.95	23.98	-4.03
	5240	48	CDD	AVG	16.99	17.00	20.01	23.98	-3.97
	5260	52	CDD	AVG	17.00	16.87	19.94	23.98	-4.04
	5300	60	CDD	AVG	16.99	16.96	19.98	23.98	-4.00
	5320	64	CDD	AVG	16.63	16.66	19.65	23.98	-4.33
	5500	100	CDD	AVG	16.46	16.49	19.49	23.98	-4.49
	5520	104	CDD	AVG	16.93	16.80	19.88	23.98	-4.10
	5580	116	CDD	AVG	16.84	16.81	19.84	23.98	-4.14
	5680	136	CDD	AVG	16.84	17.00	19.93	23.98	-4.05
	5700	140	CDD	AVG	15.81	15.77	18.80	23.98	-5.18
	5720	144	CDD	AVG	16.79	16.86	19.83	23.98	-4.15
	5745	149	CDD	AVG	18.46	18.45	21.47	30.00	-8.53
	5785	157	CDD	AVG	18.47	18.41	21.45	30.00	-8.55
	5825	165	CDD	AVG	18.42	18.46	21.45	30.00	-8.55

Table 7-150. FCC CDD Diversity 20MHz BW 802.11n (UNII) Maximum Conducted Output Power (Mid Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 4a	Antenna 2a	Summed		
	5180	36	CDD	AVG	15.50	15.50	18.51	23.98	-5.47
	5200	40	CDD	AVG	17.00	17.00	20.01	23.98	-3.97
	5240	48	CDD	AVG	17.00	17.00	20.01	23.98	-3.97
	5260	52	CDD	AVG	17.00	17.00	20.01	23.98	-3.97
	5300	60	CDD	AVG	17.00	16.95	19.99	23.98	-3.99
	5320	64	CDD	AVG	16.47	16.31	19.40	23.98	-4.58
	5500	100	CDD	AVG	14.40	14.32	17.37	23.98	-6.61
	5520	104	CDD	AVG	16.90	16.94	19.93	23.98	-4.05
	5580	116	CDD	AVG	16.95	16.92	19.95	23.98	-4.03
	5680	136	CDD	AVG	16.84	17.00	19.93	23.98	-4.05
	5700	140	CDD	AVG	13.75	14.00	16.89	23.98	-7.09
	5720	144	CDD	AVG	16.92	16.78	19.86	23.98	-4.12
	5745	149	CDD	AVG	18.41	18.42	21.43	30.00	-8.57
	5785	157	CDD	AVG	18.39	18.45	21.43	30.00	-8.57
	5825	165	CDD	AVG	18.40	18.45	21.44	30.00	-8.56

Table 7-151. FCC CDD Diversity 20MHz BW 802.11n (UNII) Maximum Conducted Output Power (High Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 125 of 577

V 10.5 12/15/2021

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 4a	Antenna 2a	Summed		
	5180	36	CDD	AVG	16.50	16.26	19.39	23.98	-4.59
	5200	40	CDD	AVG	16.82	16.80	19.82	23.98	-4.16
	5240	48	CDD	AVG	16.91	16.81	19.87	23.98	-4.11
	5260	52	CDD	AVG	16.92	16.91	19.92	23.98	-4.06
	5300	60	CDD	AVG	16.79	16.90	19.86	23.98	-4.12
	5320	64	CDD	AVG	17.00	17.00	20.01	23.98	-3.97
	5500	100	CDD	AVG	16.99	16.91	19.96	23.98	-4.02
	5580	116	CDD	AVG	16.89	16.94	19.93	23.98	-4.05
	5700	140	CDD	AVG	15.82	16.00	18.92	23.98	-5.06
	5720	144	CDD	AVG	16.95	17.00	19.98	23.98	-4.00
	5745	149	CDD	AVG	18.39	18.50	21.46	30.00	-8.54
	5785	157	CDD	AVG	18.41	18.49	21.46	30.00	-8.54
	5825	165	CDD	AVG	18.36	18.41	21.40	30.00	-8.60

Table 7-152. FCC CDD Diversity 20MHz BW 802.11ax (UNII) Maximum Conducted Output Power (Low Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 4a	Antenna 2a	Summed		
	5180	36	CDD	AVG	16.00	15.88	18.95	23.98	-5.03
	5200	40	CDD	AVG	16.96	16.97	19.97	23.98	-4.01
	5240	48	CDD	AVG	16.79	16.96	19.89	23.98	-4.09
	5260	52	CDD	AVG	16.88	17.00	19.95	23.98	-4.03
	5300	60	CDD	AVG	16.81	16.78	19.80	23.98	-4.18
	5320	64	CDD	AVG	16.42	16.47	19.46	23.98	-4.52
	5500	100	CDD	AVG	16.00	16.00	19.01	23.98	-4.97
	5520	104	CDD	AVG	16.97	17.00	20.00	23.98	-3.98
	5580	116	CDD	AVG	16.92	16.87	19.91	23.98	-4.07
	5680	136	CDD	AVG	16.98	16.93	19.97	23.98	-4.01
	5700	140	CDD	AVG	15.00	14.79	17.91	23.98	-6.07
	5720	144	CDD	AVG	16.98	17.00	20.00	23.98	-3.98
	5745	149	CDD	AVG	18.40	18.40	21.41	30.00	-8.59
	5785	157	CDD	AVG	18.45	18.33	21.40	30.00	-8.60
	5825	165	CDD	AVG	18.28	18.45	21.38	30.00	-8.62

Table 7-153. FCC CDD Diversity 20MHz BW 802.11ax (UNII) Maximum Conducted Output Power (Mid Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 126 of 577

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 4a	Antenna 2a	Summed		
	5180	36	CDD	AVG	15.50	15.35	18.44	23.98	-5.54
	5200	40	CDD	AVG	16.84	16.79	19.83	23.98	-4.15
	5240	48	CDD	AVG	16.91	16.82	19.87	23.98	-4.11
	5260	52	CDD	AVG	17.00	16.97	20.00	23.98	-3.98
	5300	60	CDD	AVG	17.00	17.00	20.01	23.98	-3.97
	5320	64	CDD	AVG	15.75	15.57	18.67	23.98	-5.31
	5500	100	CDD	AVG	14.48	14.50	17.50	23.98	-6.48
	5520	104	CDD	AVG	17.00	16.91	19.97	23.98	-4.01
	5580	116	CDD	AVG	16.87	16.97	19.93	23.98	-4.05
	5680	136	CDD	AVG	17.00	16.88	19.95	23.98	-4.03
	5700	140	CDD	AVG	14.00	13.88	16.95	23.98	-7.03
	5720	144	CDD	AVG	16.95	16.82	19.89	23.98	-4.09
	5745	149	CDD	AVG	18.40	18.37	21.40	30.00	-8.60
	5785	157	CDD	AVG	18.42	18.39	21.42	30.00	-8.58
	5825	165	CDD	AVG	18.40	18.42	21.42	30.00	-8.58

Table 7-154. FCC CDD Diversity 20MHz BW 802.11ax (UNII) Maximum Conducted Output Power (High Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 4a	Antenna 2a	Summed		
	5190	38	CDD	AVG	14.35	14.48	17.43	23.98	-6.55
	5230	46	CDD	AVG	18.30	18.47	21.39	23.98	-2.59
	5270	54	CDD	AVG	18.29	18.32	21.32	23.98	-2.66
	5310	62	CDD	AVG	16.50	16.30	19.41	23.98	-4.57
	5510	102	CDD	AVG	15.34	15.24	18.30	23.98	-5.68
	5550	110	CDD	AVG	18.36	18.15	21.27	23.98	-2.71
	5590	118	CDD	AVG	18.44	18.48	21.47	23.98	-2.51
	5670	134	CDD	AVG	18.32	18.37	21.35	23.98	-2.63
	5710	142	CDD	AVG	18.49	18.40	21.46	23.98	-2.52
	5755	151	CDD	AVG	18.39	18.49	21.45	30.00	-8.55
	5795	159	CDD	AVG	18.43	18.45	21.45	30.00	-8.55

Table 7-155. FCC CDD Diversity 40MHz BW 802.11n (UNII) Maximum Conducted Output Power (Low Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 127 of 577

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 4a	Antenna 2a	Summed		
	5190	38	CDD	AVG	13.99	13.82	16.91	23.98	-7.07
	5230	46	CDD	AVG	18.44	18.39	21.42	23.98	-2.56
	5270	54	CDD	AVG	18.44	18.31	21.39	23.98	-2.59
	5310	62	CDD	AVG	15.50	15.34	18.43	23.98	-5.55
	5510	102	CDD	AVG	14.50	14.50	17.51	23.98	-6.47
	5550	110	CDD	AVG	17.89	18.00	20.96	23.98	-3.02
	5590	118	CDD	AVG	18.41	18.35	21.39	23.98	-2.59
	5630	126	CDD	AVG	18.32	18.33	21.33	23.98	-2.65
	5670	134	CDD	AVG	17.50	17.23	20.38	23.98	-3.60
	5710	142	CDD	AVG	18.39	18.42	21.42	23.98	-2.56
	5755	151	CDD	AVG	18.38	18.49	21.45	30.00	-8.55
	5795	159	CDD	AVG	18.26	18.46	21.37	30.00	-8.63

Table 7-156. FCC CDD Diversity 40MHz BW 802.11n (UNII) Maximum Conducted Output Power (Mid Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 4a	Antenna 2a	Summed		
	5190	38	CDD	AVG	13.50	13.47	16.49	23.98	-7.49
	5230	46	CDD	AVG	18.13	18.24	21.20	23.98	-2.78
	5270	54	CDD	AVG	18.22	18.25	21.24	23.98	-2.74
	5310	62	CDD	AVG	14.00	13.84	16.93	23.98	-7.05
	5510	102	CDD	AVG	12.37	12.50	15.45	23.98	-8.53
	5550	110	CDD	AVG	16.83	16.86	19.86	23.98	-4.12
	5590	118	CDD	AVG	18.23	18.43	21.34	23.98	-2.64
	5630	126	CDD	AVG	17.88	18.40	21.16	23.98	-2.82
	5670	134	CDD	AVG	14.90	15.00	17.96	23.98	-6.02
	5710	142	CDD	AVG	18.38	18.42	21.41	23.98	-2.57
	5755	151	CDD	AVG	18.38	18.39	21.40	30.00	-8.60
	5795	159	CDD	AVG	18.40	18.36	21.39	30.00	-8.61

Table 7-157. FCC CDD Diversity 40MHz BW 802.11n (UNII) Maximum Conducted Output Power (High Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 128 of 577

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 4a	Antenna 2a	Summed		
	5190	38	CDD	AVG	13.81	13.80	16.82	23.98	-7.16
	5230	46	CDD	AVG	18.50	18.26	21.39	23.98	-2.59
	5270	54	CDD	AVG	18.36	18.43	21.41	23.98	-2.57
	5310	62	CDD	AVG	15.46	15.50	18.49	23.98	-5.49
	5510	102	CDD	AVG	14.33	14.50	17.43	23.98	-6.55
	5550	110	CDD	AVG	18.00	17.94	20.98	23.98	-3.00
	5590	118	CDD	AVG	18.33	18.22	21.28	23.98	-2.70
	5670	134	CDD	AVG	17.91	17.80	20.86	23.98	-3.12
	5710	142	CDD	AVG	18.39	18.40	21.41	23.98	-2.57
	5755	151	CDD	AVG	18.38	18.35	21.38	30.00	-8.62
	5795	159	CDD	AVG	18.41	18.45	21.44	30.00	-8.56

Table 7-158. FCC CDD Diversity 40MHz BW 802.11ax (UNII) Maximum Conducted Output Power (Low Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 4a	Antenna 2a	Summed		
	5190	38	CDD	AVG	13.64	13.75	16.71	23.98	-7.27
	5230	46	CDD	AVG	18.23	18.35	21.30	23.98	-2.68
	5270	54	CDD	AVG	18.33	18.32	21.34	23.98	-2.64
	5310	62	CDD	AVG	14.86	14.96	17.92	23.98	-6.06
	5510	102	CDD	AVG	13.93	14.00	16.98	23.98	-7.00
	5550	110	CDD	AVG	17.41	17.42	20.43	23.98	-3.55
	5590	118	CDD	AVG	18.50	18.31	21.42	23.98	-2.56
	5630	126	CDD	AVG	18.29	18.41	21.36	23.98	-2.62
	5670	134	CDD	AVG	17.00	17.00	20.01	23.98	-3.97
	5710	142	CDD	AVG	18.44	18.38	21.42	23.98	-2.56
	5755	151	CDD	AVG	18.41	18.43	21.43	30.00	-8.57
	5795	159	CDD	AVG	18.35	18.46	21.42	30.00	-8.58

Table 7-159. FCC CDD Diversity 40MHz BW802.11ax (UNII) Maximum Conducted Output Power (Mid Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 129 of 577

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 4a	Antenna 2a	Summed		
	5190	38	CDD	AVG	12.80	12.76	15.79	23.98	-8.19
	5230	46	CDD	AVG	18.29	18.50	21.41	23.98	-2.57
	5270	54	CDD	AVG	18.29	18.44	21.38	23.98	-2.60
	5310	62	CDD	AVG	12.76	12.95	15.87	23.98	-8.11
	5510	102	CDD	AVG	12.49	12.49	15.50	23.98	-8.48
	5550	110	CDD	AVG	17.00	16.99	20.00	23.98	-3.98
	5590	118	CDD	AVG	18.42	17.97	21.21	23.98	-2.77
	5630	126	CDD	AVG	18.21	17.96	21.10	23.98	-2.88
	5670	134	CDD	AVG	15.00	14.80	17.91	23.98	-6.07
	5710	142	CDD	AVG	18.36	18.40	21.39	23.98	-2.59
	5755	151	CDD	AVG	18.42	18.40	21.42	30.00	-8.58
	5795	159	CDD	AVG	18.42	18.31	21.38	30.00	-8.62

Table 7-160. FCC CDD Diversity 40MHz BW 802.11ax (UNII) Maximum Conducted Output Power (High Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 4a	Antenna 2a	Summed		
	5210	42	CDD	AVG	14.00	13.98	17.00	23.98	-6.98
	5290	58	CDD	AVG	15.44	15.50	18.48	23.98	-5.50
	5530	106	CDD	AVG	15.00	14.78	17.90	23.98	-6.08
	5610	122	CDD	AVG	18.40	17.94	21.19	23.98	-2.79
	5690	138	CDD	AVG	18.09	18.45	21.28	23.98	-2.70
	5775	155	CDD	AVG	17.95	17.93	20.95	30.00	-9.05

Table 7-161. FCC CDD Diversity 80MHz BW 802.11ac (UNII) Maximum Conducted Output Power (Low Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 4a	Antenna 2a	Summed		
	5210	42	CDD	AVG	13.32	13.26	16.30	23.98	-7.68
	5290	58	CDD	AVG	14.38	14.35	17.38	23.98	-6.60
	5530	106	CDD	AVG	14.00	13.98	17.00	23.98	-6.98
	5610	122	CDD	AVG	17.92	18.00	20.97	23.98	-3.01
	5690	138	CDD	AVG	18.41	18.38	21.41	23.98	-2.57
	5775	155	CDD	AVG	17.94	17.82	20.89	30.00	-9.11

Table 7-162. FCC CDD Diversity 80MHz BW 802.11ac (UNII) Maximum Conducted Output Power (Mid Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 130 of 577

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 4a	Antenna 2a	Summed		
	5210	42	CDD	AVG	12.86	13.00	15.94	23.98	-8.04
	5290	58	CDD	AVG	14.00	13.97	16.99	23.98	-6.99
	5530	106	CDD	AVG	12.41	12.47	15.45	23.98	-8.53
	5610	122	CDD	AVG	16.50	16.27	19.39	23.98	-4.59
	5690	138	CDD	AVG	18.39	18.41	21.41	23.98	-2.57
	5775	155	CDD	AVG	16.55	16.55	19.56	30.00	-10.44

Table 7-163. FCC CDD Diversity 80MHz BW 802.11ac (UNII) Maximum Conducted Output Power (High Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 4a	Antenna 2a	Summed		
	5210	42	CDD	AVG	13.80	13.80	16.81	23.98	-7.17
	5290	58	CDD	AVG	14.25	14.39	17.33	23.98	-6.65
	5530	106	CDD	AVG	14.10	14.07	17.10	23.98	-6.88
	5610	122	CDD	AVG	18.35	18.44	21.40	23.98	-2.58
	5690	138	CDD	AVG	18.40	18.36	21.39	23.98	-2.59
	5775	155	CDD	AVG	17.50	17.50	20.51	30.00	-9.49

Table 7-164. FCC CDD Diversity 80MHz BW 802.11ax (UNII) Maximum Conducted Output Power (Low Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 4a	Antenna 2a	Summed		
	5210	42	CDD	AVG	13.00	12.77	15.90	23.98	-8.08
	5290	58	CDD	AVG	14.40	14.50	17.46	23.98	-6.52
	5530	106	CDD	AVG	13.50	13.47	16.49	23.98	-7.49
	5610	122	CDD	AVG	17.32	17.46	20.40	23.98	-3.58
	5690	138	CDD	AVG	18.31	17.75	21.05	23.98	-2.93
	5775	155	CDD	AVG	16.50	16.43	19.48	30.00	-10.52

Table 7-165. FCC CDD Diversity 80MHz BW 802.11ax (UNII) Maximum Conducted Output Power (Mid Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 4a	Antenna 2a	Summed		
	5210	42	CDD	AVG	12.36	12.50	15.44	23.98	-8.54
	5290	58	CDD	AVG	13.76	13.99	16.88	23.98	-7.10
	5530	106	CDD	AVG	12.34	12.38	15.37	23.98	-8.61
	5610	122	CDD	AVG	16.33	16.50	19.43	23.98	-4.55
	5690	138	CDD	AVG	18.46	18.43	21.46	23.98	-2.52
	5775	155	CDD	AVG	16.50	16.27	19.40	30.00	-10.60

Table 7-166. FCC CDD Diversity 80MHz BW 802.11ax (UNII) Maximum Conducted Output Power (High Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 131 of 577

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 4a	Antenna 2a	Summed		
	5250	50	CDD	AVG	12.88	12.95	15.93	23.98	-8.05
	5570	114	CDD	AVG	12.26	12.25	15.27	23.98	-8.71

Table 7-167. FCC CDD Diversity 160MHz 802.11ac BW (UNII) Maximum Conducted Output Power (Low Data Rate)

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 4a	Antenna 4a	Summed		
	5250	50	CDD	AVG	12.50	12.44	15.48	23.98	-8.50
	5570	114	CDD	AVG	11.90	11.95	14.94	23.98	-9.04

Table 7-168. FCC CDD Diversity 160MHz 802.11ac BW (UNII) Maximum Conducted Output Power (Mid Data Rate)

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 4a	Antenna 2a	Summed		
	5250	50	CDD	AVG	11.28	11.48	14.39	23.98	-9.59
	5570	114	CDD	AVG	10.99	10.97	13.99	23.98	-9.99

Table 7-169. FCC CDD Diversity 160MHz 802.11ac BW (UNII) Maximum Conducted Output Power (High Data Rate)

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 4a	Antenna 2a	Summed		
	5250	50	CDD	AVG	12.88	12.95	15.93	23.98	-8.05
	5570	114	CDD	AVG	12.26	12.25	15.27	23.98	-8.71

Table 7-170. FCC CDD Diversity 160MHz 802.11ax BW (UNII) Maximum Conducted Output Power (Low Data Rate)

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 4a	Antenna 2a	Summed		
	5250	50	CDD	AVG	12.50	12.50	15.51	23.98	-8.47
	5570	114	CDD	AVG	11.95	11.91	14.94	23.98	-9.04

Table 7-171. FCC CDD Diversity 160MHz 802.11ax BW (UNII) Maximum Conducted Output Power (Mid Data Rate)

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
					Antenna 4a	Antenna 2a	Summed		
	5250	50	CDD	AVG	11.32	11.40	14.37	23.98	-9.61
	5570	114	CDD	AVG	10.45	10.32	13.40	23.98	-10.58

Table 7-172. FCC CDD Diversity 160MHz 802.11ax BW (UNII) Maximum Conducted Output Power (High Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 132 of 577

7.4.10 ISED CDD/SDM Diversity Maximum Conducted Output Power Measurements

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 4a	Antenna 2a	Summed						
	5180	36	CDD	AVG	11.24	11.13	14.20	-	-	-0.30	13.90	23.01	-9.11
	5200	40	CDD	AVG	11.13	11.16	14.16	-	-	-0.30	13.86	23.01	-9.15
	5240	48	CDD	AVG	11.14	11.13	14.15	-	-	-0.30	13.85	23.01	-9.16
	5260	52	CDD	AVG	16.90	16.95	19.94	23.98	-4.04	-0.20	19.74	30.00	-10.26
	5300	60	CDD	AVG	17.00	17.00	20.01	23.98	-3.97	-0.20	19.81	30.00	-10.19
	5320	64	CDD	AVG	16.93	16.79	19.87	23.98	-4.11	-0.20	19.67	30.00	-10.33
	5500	100	CDD	AVG	16.91	16.92	19.93	23.98	-4.05	0.30	20.23	30.00	-9.77
	5580	116	CDD	AVG	16.92	16.76	19.85	23.98	-4.13	0.30	20.15	30.00	-9.85
	5720	144	CDD	AVG	16.80	16.81	19.81	23.98	-4.17	0.30	20.11	30.00	-9.89
	5745	149	CDD	AVG	18.45	18.42	21.45	30.00	-8.55	0.40	21.85	-	-
	5785	157	CDD	AVG	18.40	18.48	21.45	30.00	-8.55	0.40	21.85	-	-
	5825	165	CDD	AVG	18.37	18.48	21.44	30.00	-8.56	0.40	21.84	-	-

Table 7-173. ISED CDD Diversity 20MHz BW 802.11a (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 4a	Antenna 2a	Summed						
	5180	36	CDD	AVG	11.06	11.07	14.08	-	-	-0.30	13.78	23.01	-9.23
	5200	40	CDD	AVG	11.13	11.25	14.20	-	-	-0.30	13.90	23.01	-9.11
	5240	48	CDD	AVG	11.14	11.23	14.20	-	-	-0.30	13.90	23.01	-9.11
	5260	52	CDD	AVG	16.79	17.00	19.91	23.98	-4.07	-0.20	19.71	30.00	-10.29
	5300	60	CDD	AVG	16.80	17.00	19.91	23.98	-4.07	-0.20	19.71	30.00	-10.29
	5320	64	CDD	AVG	16.64	16.50	19.58	23.98	-4.40	-0.20	19.38	30.00	-10.62
	5500	100	CDD	AVG	16.36	16.41	19.39	23.98	-4.59	0.30	19.69	30.00	-10.31
	5520	104	CDD	AVG	16.87	16.89	19.89	23.98	-4.09	0.30	20.19	30.00	-9.81
	5580	116	CDD	AVG	16.85	16.92	19.90	23.98	-4.08	0.30	20.20	30.00	-9.80
	5680	136	CDD	AVG	16.84	16.88	19.87	23.98	-4.11	0.30	20.17	30.00	-9.83
	5700	140	CDD	AVG	15.81	15.98	18.91	23.98	-5.07	0.30	19.21	30.00	-10.79
	5720	144	CDD	AVG	16.76	16.95	19.86	23.98	-4.12	0.30	20.16	30.00	-9.84
	5745	149	CDD	AVG	18.43	18.45	21.45	30.00	-8.55	0.40	21.85	-	-
	5785	157	CDD	AVG	18.28	18.39	21.35	30.00	-8.65	0.40	21.75	-	-
	5825	165	CDD	AVG	18.29	18.40	21.36	30.00	-8.64	0.40	21.76	-	-

Table 7-174. ISED CDD Diversity 20MHz BW 802.11a (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 4a	Antenna 2a	Summed						
	5180	36	CDD	AVG	11.09	11.17	14.14	-	-	-0.30	13.84	23.01	-9.17
	5200	40	CDD	AVG	11.09	11.17	14.14	-	-	-0.30	13.84	23.01	-9.17
	5240	48	CDD	AVG	11.20	11.22	14.22	-	-	-0.30	13.92	23.01	-9.09
	5260	52	CDD	AVG	16.81	16.83	19.83	23.98	-4.15	-0.20	19.63	30.00	-10.37
	5300	60	CDD	AVG	16.99	17.00	20.00	23.98	-3.98	-0.20	19.80	30.00	-10.20
	5320	64	CDD	AVG	16.34	16.46	19.41	23.98	-4.57	-0.20	19.21	30.00	-10.79
	5500	100	CDD	AVG	14.37	14.50	17.45	23.98	-6.53	0.30	17.75	30.00	-12.25
	5520	104	CDD	AVG	16.85	16.82	19.85	23.98	-4.13	0.30	20.15	30.00	-9.85
	5580	116	CDD	AVG	17.00	16.89	19.96	23.98	-4.02	0.30	20.26	30.00	-9.74
	5680	136	CDD	AVG	16.92	16.89	19.92	23.98	-4.06	0.30	20.22	30.00	-9.78
	5700	140	CDD	AVG	14.00	13.88	16.95	23.98	-7.03	0.30	17.25	30.00	-12.75
	5720	144	CDD	AVG	16.79	16.80	19.81	23.98	-4.17	0.30	20.11	30.00	-9.89
	5745	149	CDD	AVG	18.32	18.40	21.37	30.00	-8.63	0.40	21.77	-	-
	5785	157	CDD	AVG	18.20	18.45	21.34	30.00	-8.66	0.40	21.74	-	-
	5825	165	CDD	AVG	18.21	18.31	21.27	30.00	-8.73	0.40	21.67	-	-

Table 7-175. ISED CDD Diversity 20MHz BW 802.11a (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 133 of 577

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 4a	Antenna 2a	Summed						
	5180	36	SDM	AVG	14.23	14.17	17.21	-	-	-0.68	16.53	23.01	-6.48
	5200	40	SDM	AVG	14.03	14.17	17.11	-	-	-0.68	16.43	23.01	-6.58
	5240	48	SDM	AVG	14.14	14.02	17.09	-	-	-0.68	16.41	23.01	-6.60
	5260	52	CDD	AVG	16.79	16.87	19.84	23.98	-4.14	-0.20	19.64	30.00	-10.36
	5300	60	CDD	AVG	17.00	17.00	20.01	23.98	-3.97	-0.20	19.81	30.00	-10.19
	5320	64	CDD	AVG	16.82	17.00	19.92	23.98	-4.06	-0.20	19.72	30.00	-10.28
	5500	100	CDD	AVG	16.92	16.81	19.87	23.98	-4.11	0.30	20.17	30.00	-9.83
	5580	116	CDD	AVG	16.93	17.00	19.98	23.98	-4.00	0.30	20.28	30.00	-9.72
	5720	144	CDD	AVG	16.84	16.95	19.91	23.98	-4.07	0.30	20.21	30.00	-9.79
	5745	149	CDD	AVG	18.49	18.45	21.48	30.00	-8.52	0.40	21.88	-	-
	5785	157	CDD	AVG	18.40	18.39	21.41	30.00	-8.59	0.40	21.81	-	-
	5825	165	CDD	AVG	18.41	18.45	21.44	30.00	-8.56	0.40	21.84	-	-

Table 7-176. ISED CDD/SDM DIVERSITY 20MHz BW 802.11n (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 4a	Antenna 2a	Summed						
	5180	36	SDM	AVG	14.25	14.16	17.22	-	-	-0.68	16.54	23.01	-6.47
	5200	40	SDM	AVG	14.25	14.09	17.18	-	-	-0.68	16.50	23.01	-6.51
	5240	48	SDM	AVG	14.25	14.06	17.16	-	-	-0.68	16.48	23.01	-6.53
	5260	52	CDD	AVG	17.00	16.87	19.94	23.98	-4.04	-0.20	19.74	30.00	-10.26
	5300	60	CDD	AVG	16.99	16.96	19.98	23.98	-4.00	-0.20	19.78	30.00	-10.22
	5320	64	CDD	AVG	16.63	16.66	19.65	23.98	-4.33	-0.20	19.45	30.00	-10.55
	5500	100	CDD	AVG	16.46	16.49	19.49	23.98	-4.49	0.30	19.79	30.00	-10.21
	5520	104	CDD	AVG	16.93	16.80	19.88	23.98	-4.10	0.30	20.18	30.00	-9.82
	5580	116	CDD	AVG	16.84	16.81	19.84	23.98	-4.14	0.30	20.14	30.00	-9.86
	5680	136	CDD	AVG	16.84	17.00	19.93	23.98	-4.05	0.30	20.23	30.00	-9.77
	5700	140	CDD	AVG	15.81	15.77	18.80	23.98	-5.18	0.30	19.10	30.00	-10.90
	5720	144	CDD	AVG	16.79	16.86	19.83	23.98	-4.15	0.30	20.13	30.00	-9.87
	5745	149	CDD	AVG	18.46	18.45	21.47	30.00	-8.53	0.40	21.87	-	-
	5785	157	CDD	AVG	18.47	18.41	21.45	30.00	-8.55	0.40	21.85	-	-
	5825	165	CDD	AVG	18.42	18.46	21.45	30.00	-8.55	0.40	21.85	-	-

Table 7-177. ISED CDD/SDM DIVERSITY 20MHz BW 802.11n (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 4a	Antenna 2a	Summed						
	5180	36	SDM	AVG	14.25	14.12	17.19	-	-	0.86	18.05	23.01	-4.96
	5200	40	SDM	AVG	14.20	14.17	17.19	-	-	0.86	18.05	23.01	-4.96
	5240	48	SDM	AVG	14.15	14.14	17.15	-	-	0.86	18.01	23.01	-5.00
	5260	52	CDD	AVG	17.00	17.00	20.01	23.98	-3.97	-0.20	19.81	30.00	-10.19
	5300	60	CDD	AVG	17.00	16.95	19.99	23.98	-3.99	-0.20	19.79	30.00	-10.21
	5320	64	CDD	AVG	16.47	16.31	19.40	23.98	-4.58	-0.20	19.20	30.00	-10.80
	5500	100	CDD	AVG	14.40	14.32	17.37	23.98	-6.61	0.30	17.67	30.00	-12.33
	5520	104	CDD	AVG	16.90	16.94	19.93	23.98	-4.05	0.30	20.23	30.00	-9.77
	5580	116	CDD	AVG	16.95	16.92	19.95	23.98	-4.03	0.30	20.25	30.00	-9.75
	5680	136	CDD	AVG	16.84	17.00	19.93	23.98	-4.05	0.30	20.23	30.00	-9.77
	5700	140	CDD	AVG	13.75	14.00	16.89	23.98	-7.09	0.30	17.19	30.00	-12.81
	5720	144	CDD	AVG	16.92	16.78	19.86	23.98	-4.12	0.30	20.16	30.00	-9.84
	5745	149	CDD	AVG	18.41	18.42	21.43	30.00	-8.57	0.40	21.83	-	-
	5785	157	CDD	AVG	18.39	18.45	21.43	30.00	-8.57	0.40	21.83	-	-
	5825	165	CDD	AVG	18.40	18.45	21.44	30.00	-8.56	0.40	21.84	-	-

Table 7-178. ISED CDD/SDM DIVERSITY 20MHz BW 802.11n (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 134 of 577	

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 4a	Antenna 2a	Summed						
	5180	36	SDM	AVG	14.00	14.24	17.13	-	-	-0.68	16.45	23.01	-6.56
	5200	40	SDM	AVG	14.06	14.25	17.16	-	-	-0.68	16.48	23.01	-6.53
	5240	48	SDM	AVG	14.01	14.25	17.14	-	-	-0.68	16.46	23.01	-6.55
	5260	52	CDD	AVG	16.92	16.91	19.92	23.98	-4.06	-0.20	19.72	30.00	-10.28
	5300	60	CDD	AVG	16.79	16.90	19.86	23.98	-4.12	-0.20	19.66	30.00	-10.34
	5320	64	CDD	AVG	17.00	17.00	20.01	23.98	-3.97	-0.20	19.81	30.00	-10.19
	5500	100	CDD	AVG	16.99	16.91	19.96	23.98	-4.02	0.30	20.26	30.00	-9.74
	5580	116	CDD	AVG	16.89	16.94	19.93	23.98	-4.05	0.30	20.23	30.00	-9.77
	5680	136	CDD	AVG	16.77	17.00	19.89	23.98	-4.09	0.30	20.19	30.00	-9.81
	5700	140	CDD	AVG	15.82	16.00	18.92	23.98	-5.06	0.30	19.22	30.00	-10.78
	5720	144	CDD	AVG	16.95	17.00	19.98	23.98	-4.00	0.30	20.28	30.00	-9.72
	5745	149	CDD	AVG	18.39	18.50	21.46	30.00	-8.54	0.40	21.86	-	-
	5785	157	CDD	AVG	18.41	18.49	21.46	30.00	-8.54	0.40	21.86	-	-
	5825	165	CDD	AVG	18.36	18.41	21.40	30.00	-8.60	0.40	21.80	-	-

Table 7-179. ISED CDD/SDM DIVERSITY 20MHz BW 802.11ax (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 4a	Antenna 2a	Summed						
	5180	36	SDM	AVG	13.95	14.22	17.10	-	-	-0.68	16.42	23.01	-6.59
	5200	40	SDM	AVG	14.15	14.07	17.12	-	-	-0.68	16.44	23.01	-6.57
	5240	48	SDM	AVG	14.09	14.20	17.16	-	-	-0.68	16.48	23.01	-6.53
	5260	52	CDD	AVG	16.88	17.00	19.95	23.98	-4.03	-0.20	19.75	30.00	-10.25
	5300	60	CDD	AVG	16.81	16.78	19.80	23.98	-4.18	-0.20	19.60	30.00	-10.40
	5320	64	CDD	AVG	16.42	16.47	19.46	23.98	-4.52	-0.20	19.26	30.00	-10.74
	5500	100	CDD	AVG	16.00	16.00	19.01	23.98	-4.97	0.30	19.31	30.00	-10.69
	5520	104	CDD	AVG	16.97	17.00	20.00	23.98	-3.98	0.30	20.30	30.00	-9.70
	5580	116	CDD	AVG	16.92	16.87	19.91	23.98	-4.07	0.30	20.21	30.00	-9.79
	5680	136	CDD	AVG	16.98	16.93	19.97	23.98	-4.01	0.30	20.27	30.00	-9.73
	5700	140	CDD	AVG	15.00	14.79	17.91	23.98	-6.07	0.30	18.21	30.00	-11.79
	5720	144	CDD	AVG	16.98	17.00	20.00	23.98	-3.98	0.30	20.30	30.00	-9.70
	5745	149	CDD	AVG	18.40	18.40	21.41	30.00	-8.59	0.40	21.81	-	-
	5785	157	CDD	AVG	18.45	18.33	21.40	30.00	-8.60	0.40	21.80	-	-
	5825	165	CDD	AVG	18.28	18.45	21.38	30.00	-8.62	0.40	21.78	-	-

Table 7-180. ISED CDD/SDM DIVERSITY 20MHz BW 802.11ax (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 4a	Antenna 2a	Summed						
	5180	36	SDM	AVG	14.12	14.25	17.19	-	-	0.86	18.05	23.01	-4.96
	5200	40	SDM	AVG	14.24	14.23	17.25	-	-	0.86	18.11	23.01	-4.90
	5240	48	SDM	AVG	14.17	14.13	17.16	-	-	0.86	18.02	23.01	-4.99
	5260	52	CDD	AVG	17.00	16.97	20.00	23.98	-3.98	-0.20	19.80	30.00	-10.20
	5300	60	CDD	AVG	17.00	17.00	20.01	23.98	-3.97	-0.20	19.81	30.00	-10.19
	5320	64	CDD	AVG	15.75	15.57	18.67	23.98	-5.31	-0.20	18.47	30.00	-11.53
	5500	100	CDD	AVG	14.48	14.50	17.50	23.98	-6.48	0.30	17.80	30.00	-12.20
	5520	104	CDD	AVG	17.00	16.91	19.97	23.98	-4.01	0.30	20.27	30.00	-9.73
	5580	116	CDD	AVG	16.87	16.97	19.93	23.98	-4.05	0.30	20.23	30.00	-9.77
	5680	136	CDD	AVG	17.00	16.88	19.95	23.98	-4.03	0.30	20.25	30.00	-9.75
	5700	140	CDD	AVG	14.00	13.88	16.95	23.98	-7.03	0.30	17.25	30.00	-12.75
	5720	144	CDD	AVG	16.95	16.82	19.89	23.98	-4.09	0.30	20.19	30.00	-9.81
	5745	149	CDD	AVG	18.40	18.37	21.40	30.00	-8.60	0.40	21.80	-	-
	5785	157	CDD	AVG	18.42	18.39	21.42	30.00	-8.58	0.40	21.82	-	-
	5825	165	CDD	AVG	18.40	18.42	21.42	30.00	-8.58	0.40	21.82	-	-

Table 7-181. ISED CDD/SDM DIVERSITY 20MHz BW 802.11ax (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 135 of 577

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 4a	Antenna 2a	Summed						
	5190	38	SDM	AVG	14.30	14.50	17.41	-	-	-0.68	16.73	23.01	-6.28
	5230	46	SDM	AVG	16.66	16.60	19.64	-	-	-0.68	18.96	23.01	-4.05
	5270	54	CDD	AVG	18.29	18.32	21.32	23.98	-2.66	-0.20	21.12	30.00	-8.88
	5310	62	CDD	AVG	16.50	16.30	19.41	23.98	-4.57	-0.20	19.21	30.00	-10.79
	5510	102	CDD	AVG	15.34	15.24	18.30	23.98	-5.68	0.30	18.60	30.00	-11.40
	5550	110	CDD	AVG	18.36	18.15	21.27	23.98	-2.71	0.30	21.57	30.00	-8.43
	5710	142	CDD	AVG	18.49	18.40	21.46	23.98	-2.52	0.30	21.76	30.00	-8.24
	5755	151	CDD	AVG	18.39	18.49	21.45	30.00	-8.55	0.40	21.85	-	-
	5795	159	CDD	AVG	18.43	18.45	21.45	30.00	-8.55	0.40	21.85	-	-

Table 7-182. ISED CDD/SDM DIVERSITY 40MHz BW 802.11n (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 4a	Antenna 2a	Summed						
	5190	38	SDM	AVG	13.76	14.00	16.89	-	-	-0.68	16.21	23.01	-6.80
	5230	46	SDM	AVG	16.70	16.55	19.63	-	-	-0.68	18.95	23.01	-4.06
	5270	54	CDD	AVG	18.44	18.31	21.39	23.98	-2.59	-0.20	21.19	30.00	-8.81
	5310	62	CDD	AVG	15.50	15.34	18.43	23.98	-5.55	-0.20	18.23	30.00	-11.77
	5510	102	CDD	AVG	14.50	14.50	17.51	23.98	-6.47	0.30	17.81	30.00	-12.19
	5550	110	CDD	AVG	17.89	18.00	20.96	23.98	-3.02	0.30	21.26	30.00	-8.74
	5590	118	CDD	AVG	18.41	18.35	21.39	23.98	-2.59	0.30	21.69	30.00	-8.31
	5630	126	CDD	AVG	18.32	18.33	21.33	23.98	-2.65	0.30	21.63	30.00	-8.37
	5670	134	CDD	AVG	17.50	17.23	20.38	23.98	-3.60	0.30	20.68	30.00	-9.32
	5710	142	CDD	AVG	18.39	18.42	21.42	23.98	-2.56	0.30	21.72	30.00	-8.28
	5755	151	CDD	AVG	18.38	18.49	21.45	30.00	-8.55	0.40	21.85	-	-
	5795	159	CDD	AVG	18.26	18.46	21.37	30.00	-8.63	0.40	21.77	-	-

Table 7-183. ISED CDD/SDM DIVERSITY 40MHz BW 802.11n (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 4a	Antenna 2a	Summed						
	5190	38	CDD	AVG	13.50	13.29	16.41	-	-	-0.30	16.11	23.01	-6.90
	5230	46	SDM	AVG	16.66	16.75	19.71	-	-	0.86	20.57	23.01	-2.44
	5270	54	CDD	AVG	18.22	18.25	21.24	23.98	-2.74	-0.20	21.04	30.00	-8.96
	5310	62	CDD	AVG	14.00	13.84	16.93	23.98	-7.05	-0.20	16.73	30.00	-13.27
	5510	102	CDD	AVG	12.37	12.50	15.45	23.98	-8.53	0.30	15.75	30.00	-14.25
	5550	110	CDD	AVG	16.83	16.86	19.86	23.98	-4.12	0.30	20.16	30.00	-9.84
	5590	118	CDD	AVG	18.23	18.43	21.34	23.98	-2.64	0.30	21.64	30.00	-8.36
	5670	134	CDD	AVG	14.90	15.00	17.96	23.98	-6.02	0.30	18.26	30.00	-11.74
	5710	142	CDD	AVG	18.38	18.42	21.41	23.98	-2.57	0.30	21.71	30.00	-8.29
	5755	151	CDD	AVG	18.38	18.39	21.40	30.00	-8.60	0.40	21.80	-	-
	5795	159	CDD	AVG	18.40	18.36	21.39	30.00	-8.61	0.40	21.79	-	-

Table 7-184. ISED CDD/SDM DIVERSITY 40MHz BW 802.11n (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 136 of 577

V 10.5 12/15/2021

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 4a	Antenna 2a	Summed						
	5190	38	SDM	AVG	13.81	13.79	16.81	-	-	-0.68	16.13	23.01	-6.88
	5230	46	SDM	AVG	16.61	16.71	19.67	-	-	-0.68	18.99	23.01	-4.02
	5270	54	CDD	AVG	18.36	18.43	21.41	23.98	-2.57	-0.20	21.21	30.00	-8.79
	5310	62	CDD	AVG	15.46	15.50	18.49	23.98	-5.49	-0.20	18.29	30.00	-11.71
	5510	102	CDD	AVG	14.33	14.50	17.43	23.98	-6.55	0.30	17.73	30.00	-12.27
	5550	110	CDD	AVG	18.00	17.94	20.98	23.98	-3.00	0.30	21.28	30.00	-8.72
	5590	118	CDD	AVG	18.33	18.22	21.28	23.98	-2.70	0.30	21.58	30.00	-8.42
	5670	134	CDD	AVG	17.91	17.80	20.86	23.98	-3.12	0.30	21.16	30.00	-8.84
	5710	142	CDD	AVG	18.39	18.40	21.41	23.98	-2.57	0.30	21.71	30.00	-8.29
	5755	151	CDD	AVG	18.38	18.35	21.38	30.00	-8.62	0.40	21.78	-	-
	5795	159	CDD	AVG	18.41	18.45	21.44	30.00	-8.56	0.40	21.84	-	-

Table 7-185. ISED CDD/SDM DIVERSITY 40MHz BW 802.11ax (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 4a	Antenna 2a	Summed						
	5190	38	CDD	AVG	13.71	13.75	16.74	-	-	-0.30	16.44	23.01	-6.57
	5230	46	SDM	AVG	16.52	16.75	19.64	-	-	-0.68	18.96	23.01	-4.05
	5270	54	CDD	AVG	18.33	18.32	21.34	23.98	-2.64	-0.20	21.14	30.00	-8.86
	5310	62	CDD	AVG	14.86	14.96	17.92	23.98	-6.06	-0.20	17.72	30.00	-12.28
	5510	102	CDD	AVG	13.93	14.00	16.98	23.98	-7.00	0.30	17.28	30.00	-12.72
	5550	110	CDD	AVG	17.41	17.42	20.43	23.98	-3.55	0.30	20.73	30.00	-9.27
	5590	118	CDD	AVG	18.50	18.31	21.42	23.98	-2.56	0.30	21.72	30.00	-8.28
	5670	134	CDD	AVG	17.00	17.00	20.01	23.98	-3.97	0.30	20.31	30.00	-9.69
	5710	142	CDD	AVG	18.44	18.38	21.42	23.98	-2.56	0.30	21.72	30.00	-8.28
	5755	151	CDD	AVG	18.41	18.43	21.43	30.00	-8.57	0.40	21.83	-	-
	5795	159	CDD	AVG	18.35	18.46	21.42	30.00	-8.58	0.40	21.82	-	-

Table 7-186. ISED CDD/SDM DIVERSITY 40MHz BW 802.11ax (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 4a	Antenna 2a	Summed						
	5190	38	CDD	AVG	12.91	13.00	15.96	-	-	-0.30	15.66	23.01	-7.35
	5230	46	SDM	AVG	16.75	16.51	19.64	-	-	0.86	20.50	23.01	-2.51
	5270	54	CDD	AVG	18.29	18.44	21.38	23.98	-2.60	-0.20	21.18	30.00	-8.82
	5310	62	CDD	AVG	12.76	12.95	15.87	23.98	-8.11	-0.20	15.67	30.00	-14.33
	5510	102	CDD	AVG	12.49	12.49	15.50	23.98	-8.48	0.30	15.80	30.00	-14.20
	5550	110	CDD	AVG	17.00	16.99	20.00	23.98	-3.98	0.30	20.30	30.00	-9.70
	5590	118	CDD	AVG	18.42	17.97	21.21	23.98	-2.77	0.30	21.51	30.00	-8.49
	5670	134	CDD	AVG	15.00	14.80	17.91	23.98	-6.07	0.30	18.21	30.00	-11.79
	5710	142	CDD	AVG	18.36	18.40	21.39	23.98	-2.59	0.30	21.69	30.00	-8.31
	5755	151	CDD	AVG	18.42	18.40	21.42	30.00	-8.58	0.40	21.82	-	-
	5795	159	CDD	AVG	18.42	18.31	21.38	30.00	-8.62	0.40	21.78	-	-

Table 7-187. ISED CDD/SDM DIVERSITY 40MHz BW 802.11ax (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 137 of 577

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 4a	Antenna 2a	Summed						
	5210	42	CDD	AVG	14.00	13.98	17.00	-	-	-0.30	16.70	23.01	-6.31
	5290	58	CDD	AVG	15.44	15.50	18.48	23.98	-5.50	-0.20	18.28	30.00	-11.72
	5530	106	CDD	AVG	15.00	14.78	17.90	23.98	-6.08	0.30	18.20	30.00	-11.80
	5690	138	CDD	AVG	18.09	18.45	21.28	23.98	-2.70	0.30	21.58	30.00	-8.42
	5775	155	CDD	AVG	17.95	17.93	20.95	30.00	-9.05	0.40	21.35	-	-

Table 7-188. ISED CDD Diversity 80MHz BW 802.11ac (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 4a	Antenna 2a	Summed						
	5210	42	CDD	AVG	13.32	13.26	16.30	-	-	-0.30	16.00	23.01	-7.01
	5290	58	CDD	AVG	14.38	14.35	17.38	23.98	-6.60	-0.20	17.18	30.00	-12.82
	5530	106	CDD	AVG	14.00	13.98	17.00	23.98	-6.98	0.30	17.30	30.00	-12.70
	5690	138	CDD	AVG	18.41	18.38	21.41	23.98	-2.57	0.30	21.71	30.00	-8.29
	5775	155	CDD	AVG	17.94	17.82	20.89	30.00	-9.11	0.40	21.29	-	-

Table 7-189. ISED CDD Diversity 80MHz BW 802.11ac (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 4a	Antenna 2a	Summed						
	5210	42	CDD	AVG	12.79	13.00	15.91	-	-	-0.30	15.61	23.01	-7.40
	5290	58	CDD	AVG	14.00	13.97	16.99	23.98	-6.99	-0.20	16.79	30.00	-13.21
	5530	106	CDD	AVG	12.41	12.47	15.45	23.98	-8.53	0.30	15.75	30.00	-14.25
	5690	138	CDD	AVG	18.39	18.41	21.41	23.98	-2.57	0.30	21.71	30.00	-8.29
	5775	155	CDD	AVG	16.55	16.55	19.56	30.00	-10.44	0.40	19.96	-	-

Table 7-190. ISED CDD DIVERSITY 80MHz BW 802.11ac (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 4a	Antenna 2a	Summed						
	5210	42	CDD	AVG	13.80	13.80	16.81	-	-	-0.30	16.51	23.01	-6.50
	5290	58	CDD	AVG	14.25	14.39	17.33	23.98	-6.65	-0.20	17.13	30.00	-12.87
	5530	106	CDD	AVG	14.10	14.07	17.10	23.98	-6.88	0.30	17.40	30.00	-12.60
	5690	138	CDD	AVG	18.40	18.36	21.39	23.98	-2.59	0.30	21.69	30.00	-8.31
	5775	155	CDD	AVG	17.50	17.50	20.51	30.00	-9.49	0.40	20.91	-	-

Table 7-191. ISED CDD DIVERSITY 80MHz BW 802.11ax (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 4a	Antenna 2a	Summed						
	5210	42	CDD	AVG	12.87	12.90	15.90	-	-	-0.30	15.60	23.01	-7.41
	5290	58	CDD	AVG	14.40	14.50	17.46	23.98	-6.52	-0.20	17.26	30.00	-12.74
	5530	106	CDD	AVG	13.50	13.47	16.49	23.98	-7.49	0.30	16.79	30.00	-13.21
	5690	138	CDD	AVG	18.31	17.75	21.05	23.98	-2.93	0.30	21.35	30.00	-8.65
	5775	155	CDD	AVG	16.50	16.43	19.48	30.00	-10.52	0.40	19.88	-	-

Table 7-192. ISED CDD DIVERSITY 80MHz BW 802.11ax (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 138 of 577

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 4a	Antenna 2a	Summed						
	5210	42	CDD	AVG	12.30	12.45	15.38	-	-	-0.30	15.08	23.01	-7.93
	5290	58	CDD	AVG	13.76	13.99	16.88	23.98	-7.10	-0.20	16.68	30.00	-13.32
	5530	106	CDD	AVG	12.34	12.38	15.37	23.98	-8.61	0.30	15.67	30.00	-14.33
	5690	138	CDD	AVG	18.46	18.43	21.46	23.98	-2.52	0.30	21.76	30.00	-8.24
	5775	155	CDD	AVG	16.50	16.27	19.40	30.00	-10.60	0.40	19.80	-	-

Table 7-193. ISED CDD DIVERSITY 80MHz BW 802.11ax (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				Antenna 4a	Antenna 2a	Summed						
	5250	50	AVG	12.89	13.00	15.96	23.98	-10.98	-0.20	15.76	23.01	-7.25

Table 7-194. ISED CDD DIVERSITY 160MHz BW 802.11ac (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 4a	Antenna 2a	Summed						
	5250	50	CDD	AVG	12.40	12.48	15.45	23.98	-11.50	-0.20	15.25	23.01	-7.76

Table 7-195. ISED CDD DIVERSITY 160MHz BW 802.11ac (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				Antenna 4a	Antenna 2a	Summed						
	5250	50	AVG	11.35	11.42	14.40	23.98	-9.58	-0.20	14.20	23.01	-8.81

Table 7-196. ISED CDD DIVERSITY 160MHz BW 802.11ac (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 4a	Antenna 2a	Summed						
	5250	50	CDD	AVG	12.89	12.96	15.94	23.98	-11.02	-0.20	15.74	23.01	-7.27

Table 7-197. ISED CDD DIVERSITY 160MHz BW 802.11ax (UNII) Maximum Conducted Output Power and Max EIRP (Low Data Rate)

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 4a	Antenna 2a	Summed						
	5250	50	CDD	AVG	12.26	12.37	15.32	23.98	-11.61	-0.20	15.12	23.01	-7.89

Table 7-198. ISED CDD DIVERSITY 160MHz BW 802.11ax (UNII) Maximum Conducted Output Power and Max EIRP (Mid Data Rate)

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 4a	Antenna 2a	Summed						
	5250	50	CDD	AVG	11.50	11.50	14.51	23.98	-12.48	-0.20	14.31	23.01	-8.70

Table 7-199. ISED CDD DIVERSITY 160MHz BW 802.11ax (UNII) Maximum Conducted Output Power and Max EIRP (High Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 139 of 577

Note:

Per ANSI C63.10-2013 and KDB 662911 v02r01 Section E1), the conducted powers at Antenna 4a and Antenna WF5b were first measured separately during CDD/SDM transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10-2013 Section 14.4.3, the directional gain is calculated using the following formula, where G_N is the gain of the nth antenna and N_{ANT} , the total number of antennas used.

$$\text{Directional gain} = G_{ANT} + \text{Array Gain dBi}$$

Per ANSI C63.10-2013 Section 14.4.3, the uncorrelated directional gain is calculated using the following formula, where G_N is the gain of the nth antenna and N_{ANT} , the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/10} + 10^{G_2/10} + \dots + 10^{G_N/10}) / N_{ANT}] \text{ dBi}$$

Sample CDD/SDM Calculation:

At 5180MHz in 802.11n (20MHz BW) mode, the average conducted output power was measured to be 14.25dBm for Antenna WF5b and 14.23dBm for Antenna 4a.

$$\text{Antenna 5b} + \text{Antenna WF4a} = \text{SDM}$$

$$(14.25\text{dBm} + 14.23\text{dBm}) = (26.607\text{mW} + 26.485\text{mW}) = 53.092\text{mW} = 17.25\text{dBm}$$

Sample e.i.r.p. Calculation:

At 5180MHz in 802.11n (20MHz BW) mode, the average SDM conducted power was calculated to be 17.25dBm with directional gain of 1.13 dBi.

$$\text{e.i.r.p. (dBm)} = \text{Conducted Power (dBm)} + \text{Ant gain (dBi)}$$

$$17.25 \text{ dBm} + 1.13 \text{ dBi} = 18.38 \text{ dBm}$$

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 140 of 577

V 10.5 12/15/2021

7.5 Maximum Power Spectral Density – 802.11a/n/ac/ax(SU) §15.407(a.1.iv) §15.407(a.2) §15.407(a.3); RSS-247 [6.2]

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. Method SA-1, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, was used to measure the power spectral density.

In the 5.15 – 5.25GHz, 5.25 – 5.35GHz, 5.47 – 5.725GHz bands, the maximum permissible power spectral density is 11dBm/MHz.

In the 5.15 – 5.25GHz band, the e.i.r.p. spectral density shall not exceed 10 dBm in any 1 MHz band.

In the 5.725 – 5.850GHz band, the maximum permissible power spectral density is 30dBm/500kHz.

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.2.2
KDB 789033 D02 v02r01 – Section F
ANSI C63.10-2013 – Section 14.3.2.2 Measure-and-Sum Technique
KDB 662911 v02r01 – Section E)2) Measure-and-Sum Technique

Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire emission bandwidth of the signal
3. RBW = 1MHz for U-NII 1, 500kHz for U-NII 3
4. VBW ≥ 3MHz for U-NII 1, ≥ 3 x RBW for U-NII 3
5. Number of sweep points ≥ 2 x (span/RBW)
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run for all modes
9. Trace was averaged over 100 sweeps
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-4. Test Instrument & Measurement Setup

Test Notes

1. The data rates have been classified into three different groups; Low Data Rate, middle rate, and High Data Rate. All three data rate groups of data rate have been investigated and only the worst case data rate per group is reported.
2. Low, mid, and high channels were tested and tabular data has been reported. Only mid channel psd plots have been reported.

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 141 of 577

V 10.5 12/15/2021

7.5.1 Antenna WF5b Power Spectral Density Measurements

	Frequency [MHz]	Channel No.	802.11 MODE	Data Rate [Mbps]	Measured Power Density [dBm/MHz]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	n (20MHz)	19.5/21.7 (MCS2)	7.53	11.00	-3.47
	5200	40	n (20MHz)	19.5/21.7 (MCS2)	7.87	11.00	-3.13
	5240	48	n (20MHz)	19.5/21.7 (MCS2)	7.56	11.00	-3.44
	5180	36	ax (SU) (20MHz)	24/25.8 (MCS2)	5.73	11.00	-5.27
	5200	40	ax (SU) (20MHz)	24/25.8 (MCS2)	6.55	11.00	-4.45
	5240	48	ax (SU) (20MHz)	24/25.8 (MCS2)	6.33	11.00	-4.67
	5190	38	n (40MHz)	40/40.5 (MCS2)	1.85	11.00	-9.15
	5230	46	n (40MHz)	40/40.5 (MCS2)	5.52	11.00	-5.48
	5190	38	ax (SU) (40MHz)	49/51.6 (MCS2)	0.27	11.00	-10.73
	5230	46	ax (SU) (40MHz)	49/51.6 (MCS2)	4.23	11.00	-6.77
	5210	42	ac (80MHz)	87.8/97.5 (MCS2)	-1.44	11.00	-12.44
	5210	42	ax (SU) (80MHz)	102/108.1 (MCS2)	-2.75	11.00	-13.75
Band 1/2	5250	50	ac (160MHz)	87.8/97.5 (MCS2)	-6.98	11.00	-17.98
	5250	50	ax (SU) (160MHz)	102/108.1 (MCS2)	-6.08	11.00	-17.08
Band 2A	5260	52	n (20MHz)	19.5/21.7 (MCS2)	8.13	11.00	-2.87
	5300	60	n (20MHz)	19.5/21.7 (MCS2)	7.56	11.00	-3.44
	5320	64	n (20MHz)	19.5/21.7 (MCS2)	7.49	11.00	-3.51
	5260	52	ax (SU) (20MHz)	24/25.8 (MCS2)	6.46	11.00	-4.54
	5300	60	ax (SU) (20MHz)	24/25.8 (MCS2)	6.09	11.00	-4.91
	5320	64	ax (SU) (20MHz)	24/25.8 (MCS2)	6.16	11.00	-4.84
	5270	54	n (40MHz)	40/40.5 (MCS2)	5.52	11.00	-5.48
	5310	62	n (40MHz)	40/40.5 (MCS2)	4.51	11.00	-6.49
	5270	54	ax (SU) (40MHz)	49/51.6 (MCS2)	4.44	11.00	-6.56
	5310	62	ax (SU) (40MHz)	49/51.6 (MCS2)	2.25	11.00	-8.75
	5290	58	ac (80MHz)	87.8/97.5 (MCS2)	0.38	11.00	-10.62
	5290	58	ax (SU) (80MHz)	102/108.1 (MCS2)	-1.28	11.00	-12.28
	5500	100	n (20MHz)	19.5/21.7 (MCS2)	7.47	11.00	-3.53
	5580	116	n (20MHz)	19.5/21.7 (MCS2)	7.25	11.00	-3.75
	*5600	120	n (20MHz)	19.5/21.7 (MCS2)	7.25	11.00	-3.75
Band 2C	5700	140	n (20MHz)	19.5/21.7 (MCS2)	7.23	11.00	-3.77
	5720	144	n (20MHz)	19.5/21.7 (MCS2)	7.50	11.00	-3.51
	5500	100	ax (SU) (20MHz)	24/25.8 (MCS2)	4.89	11.00	-6.11
	5580	116	ax (SU) (20MHz)	24/25.8 (MCS2)	5.77	11.00	-5.23
	*5600	120	ax (SU) (20MHz)	24/25.8 (MCS2)	6.07	11.00	-4.93
	5700	140	ax (SU) (20MHz)	24/25.8 (MCS2)	5.13	11.00	-5.87
	5720	144	ax (SU) (20MHz)	24/25.8 (MCS2)	6.06	11.00	-4.94
	5510	102	n (40MHz)	40/40.5 (MCS2)	3.36	11.00	-7.64
	5550	110	n (40MHz)	40/40.5 (MCS2)	5.20	11.00	-5.80
	*5590	118	n (40MHz)	40/40.5 (MCS2)	4.89	11.00	-6.11
	5670	134	n (40MHz)	40/40.5 (MCS2)	4.52	11.00	-6.48
	5710	142	n (40MHz)	40/40.5 (MCS2)	4.98	11.00	-6.02
	5510	102	ax (SU) (40MHz)	49/51.6 (MCS2)	1.23	11.00	-9.77
	5550	110	ax (SU) (40MHz)	49/51.6 (MCS2)	3.93	11.00	-7.08
	*5590	118	ax (SU) (40MHz)	49/51.6 (MCS2)	3.61	11.00	-7.39
	5670	134	ax (SU) (40MHz)	49/51.6 (MCS2)	3.47	11.00	-7.53
	5710	142	ax (SU) (40MHz)	49/51.6 (MCS2)	3.84	11.00	-7.17
	5530	106	ac (80MHz)	87.8/97.5 (MCS2)	-0.59	11.00	-11.59
	*5610	122	ac (80MHz)	87.8/97.5 (MCS2)	1.48	11.00	-9.52
	5690	138	ac (80MHz)	87.8/97.5 (MCS2)	1.40	11.00	-9.60
	5530	106	ax (SU) (80MHz)	102/108.1 (MCS2)	-2.26	11.00	-13.26
	*5610	122	ax (SU) (80MHz)	102/108.1 (MCS2)	0.58	11.00	-10.42
	5690	138	ax (SU) (80MHz)	102/108.1 (MCS2)	0.48	11.00	-10.52
	*5570	114	ac (160MHz)	87.8/97.5 (MCS2)	-7.02	11.00	-18.02
	*5570	114	ax (SU) (160MHz)	102/108.1 (MCS2)	-8.13	11.00	-19.13

Table 7-200. Bands 1, 2A, 2C Power Spectral Density Measurements Antenna 4a (Low Data Rate)

*TDWR channel is not supported for ISSED (denoted by a * next to the frequency)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 142 of 577

V 10.5 12/15/2021

	Frequency [MHz]	Channel No.	802.11 MODE	Data Rate [Mbps]	Measured Power Density [dBm/MHz]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	n (20MHz)	39/43.3 (MCS4)	7.10	11.00	-3.90
	5200	40	n (20MHz)	39/43.3 (MCS4)	7.87	11.00	-3.14
	5240	48	n (20MHz)	39/43.3 (MCS4)	7.36	11.00	-3.64
	5180	36	ax (SU) (20MHz)	49/51.6 (MCS4)	4.51	11.00	-6.49
	5200	40	ax (SU) (20MHz)	49/51.6 (MCS4)	6.57	11.00	-4.43
	5240	48	ax (SU) (20MHz)	49/51.6 (MCS4)	6.45	11.00	-4.55
	5190	38	n (40MHz)	81/90 (MCS4)	1.80	11.00	-9.20
	5230	46	n (40MHz)	81/90 (MCS4)	5.63	11.00	-5.37
	5190	38	ax (SU) (40MHz)	98/103.2 (MCS4)	0.57	11.00	-10.43
	5230	46	ax (SU) (40MHz)	98/103.2 (MCS4)	4.83	11.00	-6.17
	5210	42	ac (80MHz)	175.5/195 (MCS4)	-1.91	11.00	-12.91
	5210	42	ax (SU) (80MHz)	204/216.2 (MCS4)	-3.45	11.00	-14.45
Band 1/2	5250	50	ac (160MHz)	175.5/195 (MCS4)	-7.19	11.00	-18.19
	5250	50	ax (SU) (160MHz)	204/216.2 (MCS4)	-6.48	11.00	-17.48
Band 2A	5260	52	n (20MHz)	39/43.3 (MCS4)	7.68	11.00	-3.32
	5300	60	n (20MHz)	39/43.3 (MCS4)	7.53	11.00	-3.48
	5320	64	n (20MHz)	39/43.3 (MCS4)	7.47	11.00	-3.53
	5260	52	ax (SU) (20MHz)	49/51.6 (MCS4)	6.62	11.00	-4.38
	5300	60	ax (SU) (20MHz)	49/51.6 (MCS4)	6.31	11.00	-4.69
	5320	64	ax (SU) (20MHz)	49/51.6 (MCS4)	5.72	11.00	-5.29
	5270	54	n (40MHz)	81/90 (MCS4)	5.65	11.00	-5.35
	5310	62	n (40MHz)	81/90 (MCS4)	3.30	11.00	-7.70
	5270	54	ax (SU) (40MHz)	98/103.2 (MCS4)	4.22	11.00	-6.78
	5310	62	ax (SU) (40MHz)	98/103.2 (MCS4)	1.23	11.00	-9.77
	5290	58	ac (80MHz)	175.5/195 (MCS4)	-0.71	11.00	-11.71
	5290	58	ax (SU) (80MHz)	204/216.2 (MCS4)	-1.87	11.00	-12.87
Band 2C	5500	100	n (20MHz)	39/43.3 (MCS4)	6.40	11.00	-4.61
	5580	116	n (20MHz)	39/43.3 (MCS4)	7.65	11.00	-3.35
	*5600	120	n (20MHz)	39/43.3 (MCS4)	7.35	11.00	-3.66
	5700	140	n (20MHz)	39/43.3 (MCS4)	6.60	11.00	-4.40
	5720	144	n (20MHz)	39/43.3 (MCS4)	7.21	11.00	-3.79
	5500	100	ax (SU) (20MHz)	49/51.6 (MCS4)	4.34	11.00	-6.66
	5580	116	ax (SU) (20MHz)	49/51.6 (MCS4)	6.16	11.00	-4.84
	*5600	120	ax (SU) (20MHz)	49/51.6 (MCS4)	6.10	11.00	-4.90
	5700	140	ax (SU) (20MHz)	49/51.6 (MCS4)	4.09	11.00	-6.91
	5720	144	ax (SU) (20MHz)	49/51.6 (MCS4)	6.16	11.00	-4.84
	5510	102	n (40MHz)	81/90 (MCS4)	2.20	11.00	-8.80
	5550	110	n (40MHz)	81/90 (MCS4)	5.42	11.00	-5.58
	*5590	118	n (40MHz)	81/90 (MCS4)	4.97	11.00	-6.03
	5670	134	n (40MHz)	81/90 (MCS4)	5.54	11.00	-5.46
	5710	142	n (40MHz)	81/90 (MCS4)	5.31	11.00	-5.69
	5510	102	ax (SU) (40MHz)	98/103.2 (MCS4)	0.46	11.00	-10.54
	5550	110	ax (SU) (40MHz)	98/103.2 (MCS4)	3.86	11.00	-7.14
	*5590	118	ax (SU) (40MHz)	98/103.2 (MCS4)	3.75	11.00	-7.26
	5670	134	ax (SU) (40MHz)	98/103.2 (MCS4)	3.00	11.00	-8.00
	5710	142	ax (SU) (40MHz)	98/103.2 (MCS4)	3.30	11.00	-7.70
	5530	106	ac (80MHz)	175.5/195 (MCS4)	-1.58	11.00	-12.58
	*5610	122	ac (80MHz)	175.5/195 (MCS4)	1.04	11.00	-9.96
	5690	138	ac (80MHz)	175.5/195 (MCS4)	1.65	11.00	-9.35
	5530	106	ax (SU) (80MHz)	204/216.2 (MCS4)	-3.16	11.00	-14.16
	*5610	122	ax (SU) (80MHz)	204/216.2 (MCS4)	0.06	11.00	-10.94
	5690	138	ax (SU) (80MHz)	204/216.2 (MCS4)	0.56	11.00	-10.44
	*5570	114	ac (160MHz)	175.5/195 (MCS4)	-7.53	11.00	-18.53
	*5570	114	ax (SU) (160MHz)	204/216.2 (MCS4)	-8.23	11.00	-19.23

Table 7-201. Bands 1, 2A, 2C Power Spectral Density Measurements Antenna 4a (Mid Data Rate)

*TDWR channel is not supported for ISSED (denoted by a * next to the frequency)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 143 of 577

V 10.5 12/15/2021


	Frequency [MHz]	Channel No.	802.11 MODE	Data Rate [Mbps]	Measured Power Density [dBm/MHz]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	n (20MHz)	65/72.2 (MCS7)	4.77	11.00	-6.23
	5200	40	n (20MHz)	65/72.2 (MCS7)	6.76	11.00	-4.24
	5240	48	n (20MHz)	65/72.2 (MCS7)	6.60	11.00	-4.40
	5180	36	ax (SU) (20MHz)	135/143.4 (MCS11)	4.27	11.00	-6.73
	5200	40	ax (SU) (20MHz)	135/143.4 (MCS11)	6.75	11.00	-4.25
	5240	48	ax (SU) (20MHz)	135/143.4 (MCS11)	6.26	11.00	-4.74
	5190	38	n (40MHz)	135/150 (MCS7)	0.58	11.00	-10.42
	5230	46	n (40MHz)	135/150 (MCS7)	4.26	11.00	-6.74
	5190	38	ax (SU) (40MHz)	271/286 (MCS11)	0.28	11.00	-10.73
	5230	46	ax (SU) (40MHz)	271/286 (MCS11)	4.43	11.00	-6.57
	5210	42	ac (80MHz)	390/433.3 (MCS9)	-3.17	11.00	-14.17
	5210	42	ax (SU) (80MHz)	567/600.5 (MCS11)	-3.73	11.00	-14.73
Band 1/2	5250	50	ac (160MHz)	390/433.3 (MCS9)	-6.39	11.00	-17.39
	5250	50	ax (SU) (160MHz)	567/600.5 (MCS11)	-6.96	11.00	-17.96
Band 2A	5260	52	n (20MHz)	65/72.2 (MCS7)	6.32	11.00	-4.68
	5300	60	n (20MHz)	65/72.2 (MCS7)	6.19	11.00	-4.81
	5320	64	n (20MHz)	65/72.2 (MCS7)	5.55	11.00	-5.45
	5260	52	ax (SU) (20MHz)	135/143.4 (MCS11)	6.47	11.00	-4.53
	5300	60	ax (SU) (20MHz)	135/143.4 (MCS11)	6.04	11.00	-4.96
	5320	64	ax (SU) (20MHz)	135/143.4 (MCS11)	4.98	11.00	-6.02
	5270	54	n (40MHz)	135/150 (MCS7)	4.26	11.00	-6.74
	5310	62	n (40MHz)	135/150 (MCS7)	0.70	11.00	-10.30
	5270	54	ax (SU) (40MHz)	271/286 (MCS11)	4.21	11.00	-6.80
	5310	62	ax (SU) (40MHz)	271/286 (MCS11)	0.15	11.00	-10.85
	5290	58	ac (80MHz)	390/433.3 (MCS9)	-3.11	11.00	-14.11
	5290	58	ax (SU) (80MHz)	567/600.5 (MCS11)	-3.14	11.00	-14.14
Band 2C	5500	100	n (20MHz)	65/72.2 (MCS7)	2.96	11.00	-8.04
	5580	116	n (20MHz)	65/72.2 (MCS7)	6.09	11.00	-4.92
	*5600	120	n (20MHz)	65/72.2 (MCS7)	6.19	11.00	-4.81
	5700	140	n (20MHz)	65/72.2 (MCS7)	3.54	11.00	-7.46
	5720	144	n (20MHz)	65/72.2 (MCS7)	6.10	11.00	-4.90
	5500	100	ax (SU) (20MHz)	135/143.4 (MCS11)	2.74	11.00	-8.26
	5580	116	ax (SU) (20MHz)	135/143.4 (MCS11)	6.19	11.00	-4.81
	*5600	120	ax (SU) (20MHz)	135/143.4 (MCS11)	6.43	11.00	-4.57
	5700	140	ax (SU) (20MHz)	135/143.4 (MCS11)	3.06	11.00	-7.94
	5720	144	ax (SU) (20MHz)	135/143.4 (MCS11)	5.88	11.00	-5.12
	5510	102	n (40MHz)	135/150 (MCS7)	-0.80	11.00	-11.80
	5550	110	n (40MHz)	135/150 (MCS7)	3.14	11.00	-7.86
	*5590	118	n (40MHz)	135/150 (MCS7)	3.54	11.00	-7.46
	5670	134	n (40MHz)	135/150 (MCS7)	1.37	11.00	-9.63
	5710	142	n (40MHz)	135/150 (MCS7)	3.65	11.00	-7.35
	5510	102	ax (SU) (40MHz)	271/286 (MCS11)	-0.98	11.00	-11.98
	5550	110	ax (SU) (40MHz)	271/286 (MCS11)	3.06	11.00	-7.95
	*5590	118	ax (SU) (40MHz)	271/286 (MCS11)	3.69	11.00	-7.31
	5670	134	ax (SU) (40MHz)	271/286 (MCS11)	0.90	11.00	-10.10
	5710	142	ax (SU) (40MHz)	271/286 (MCS11)	3.83	11.00	-7.18
	5530	106	ac (80MHz)	390/433.3 (MCS9)	-5.08	11.00	-16.08
	*5610	122	ac (80MHz)	390/433.3 (MCS9)	-0.35	11.00	-11.35
	5690	138	ac (80MHz)	390/433.3 (MCS9)	0.42	11.00	-10.58
	5530	106	ax (SU) (80MHz)	567/600.5 (MCS11)	-4.43	11.00	-15.43
	*5610	122	ax (SU) (80MHz)	567/600.5 (MCS11)	-0.93	11.00	-11.93
	5690	138	ax (SU) (80MHz)	567/600.5 (MCS11)	0.46	11.00	-10.54
	*5570	114	ac (160MHz)	390/433.3 (MCS9)	-9.27	11.00	-20.27
	*5570	114	ax (SU) (160MHz)	567/600.5 (MCS11)	-9.95	11.00	-20.95

Table 7-202. Bands 1, 2A, 2C Power Spectral Density Measurements Antenna 4a (High Data Rate)


*TDWR channel is not supported for ISSED (denoted by a * next to the frequency)

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 144 of 577


V 10.5 12/15/2021

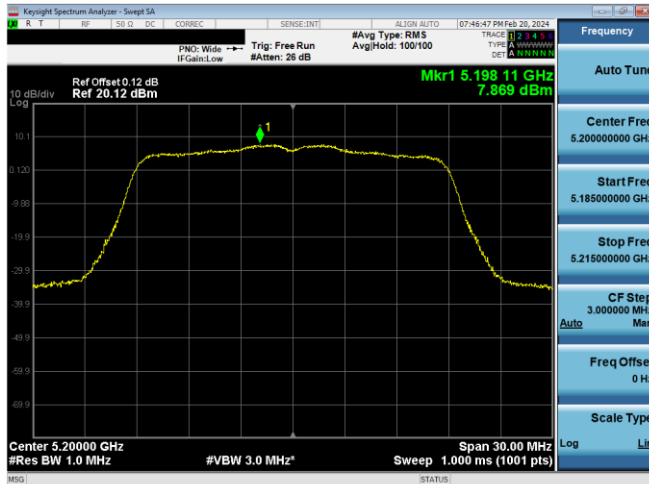


Plot 7-252. PSD Antenna WF5b (20MHz BW 802.11n – Ch. 40, MCS2)

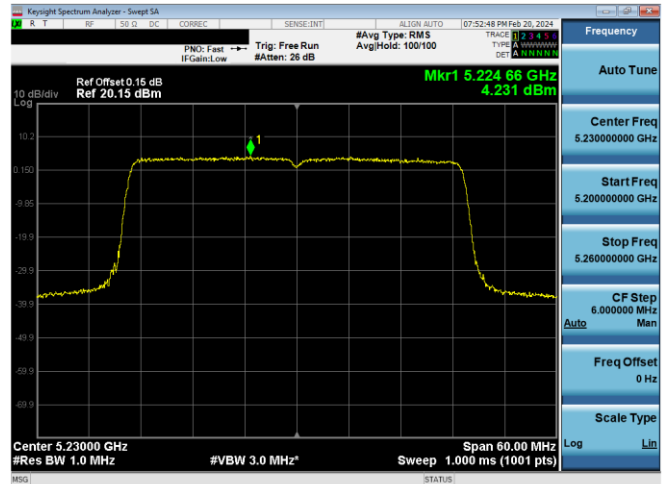


Plot 7-255. PSD Antenna WF5b (40MHz BW 802.11ax(SU) – Ch. 46, MCS2)

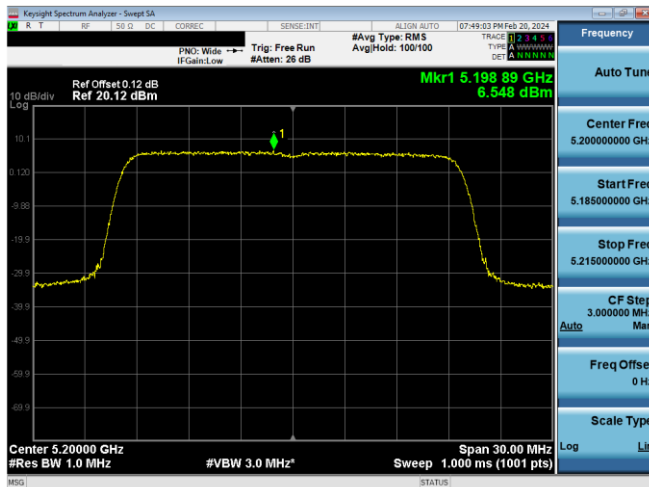


Plot 7-253. PSD Antenna WF5b (20MHz BW 802.11ax(SU) – Ch. 40, MCS2)

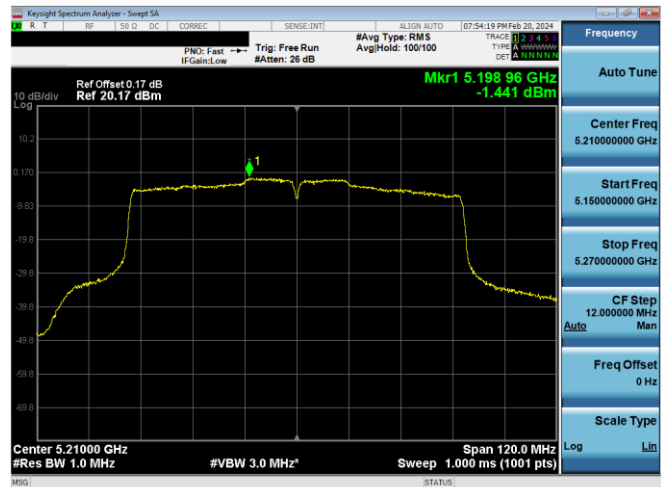

Plot 7-256. PSD Antenna WF5b (80MHz BW 802.11ac – Ch. 42, MCS2)

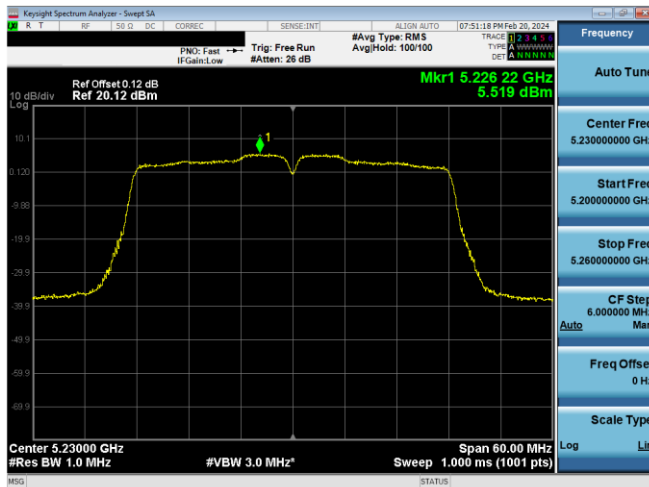


Plot 7-254. PSD Antenna WF5b (40MHz BW 802.11n – Ch. 46, MCS2)

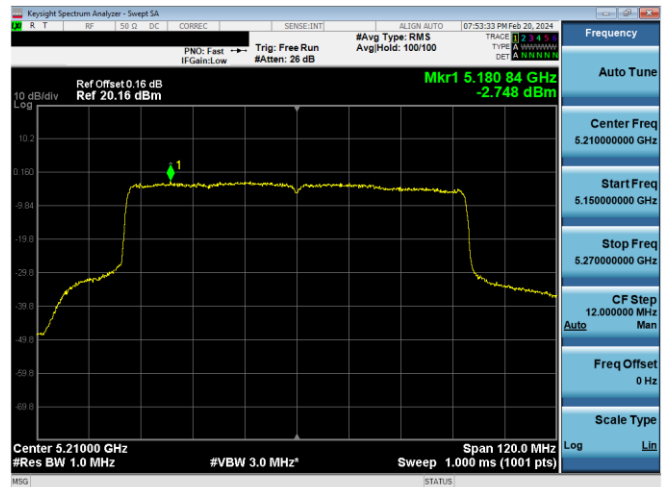


Plot 7-257. PSD Antenna WF5b (80MHz BW 802.11ax(SU) – Ch. 42, MCS2)


FCC ID: BCGA2837 IC: 579C-A2837	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 145 of 577

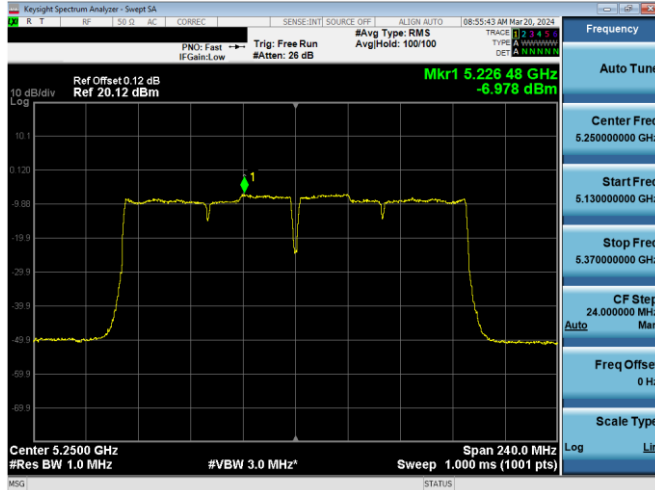


Plot 7-258. PSD Antenna WF5b (160MHz BW 802.11ac – Ch. 50, MCS2)

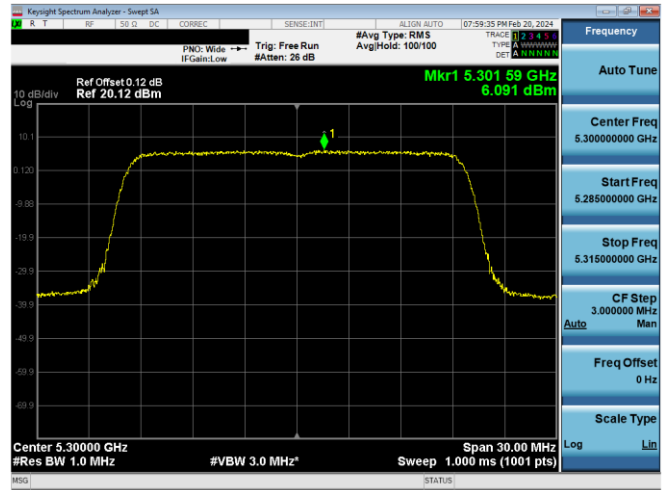


Plot 7-261. PSD Antenna WF5b (20MHz BW 802.11ax(SU) – Ch. 60, MCS2)

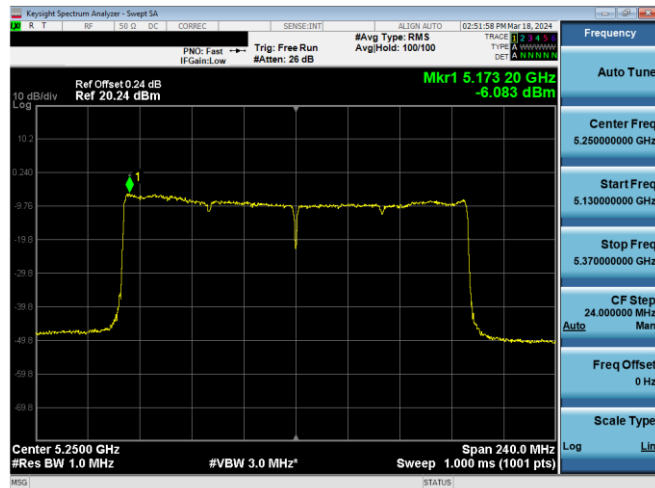


Plot 7-259. PSD Antenna WF5b (160MHz BW 802.11ax(SU) – Ch. 50, MCS2)

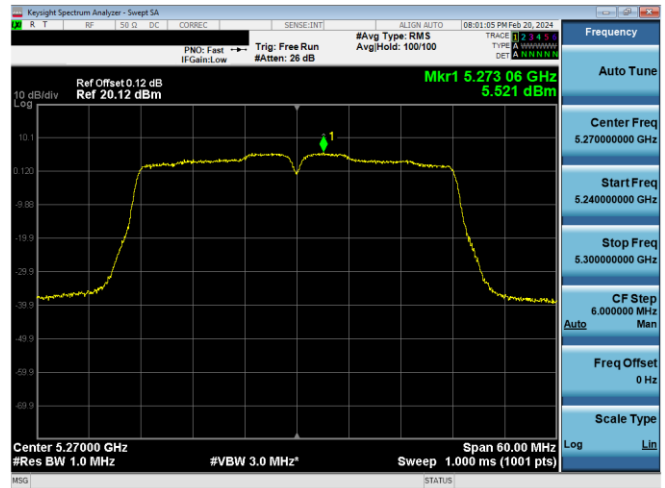

Plot 7-262. PSD Antenna WF5b (40MHz BW 802.11n – Ch. 54, MCS2)

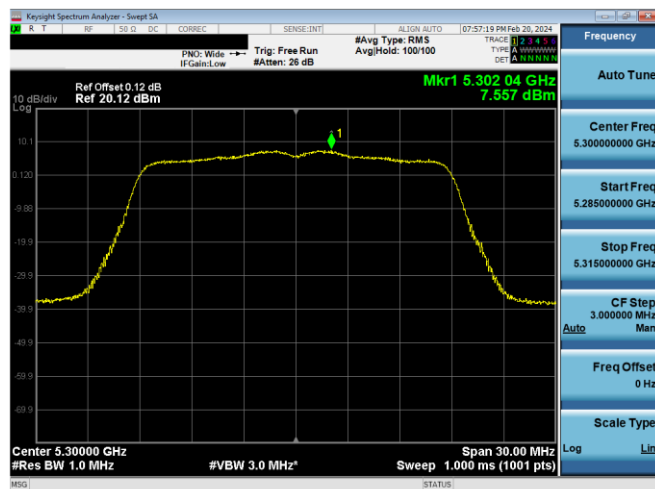


Plot 7-260. PSD Antenna WF5b (20MHz BW 802.11n – Ch. 60, MCS2)

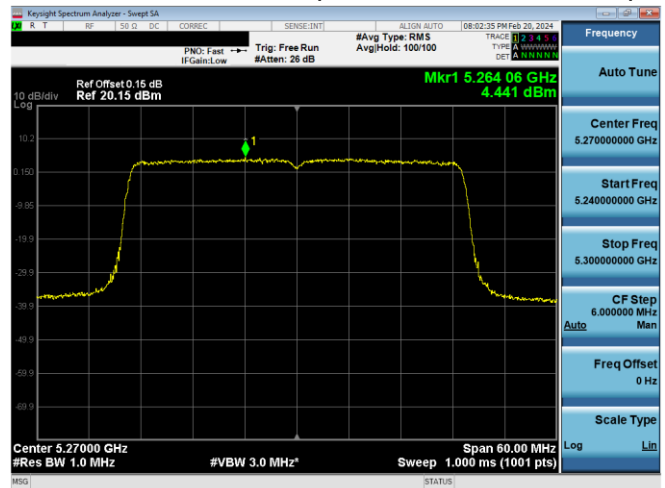


Plot 7-263. PSD Antenna WF5b (40MHz BW 802.11ax(SU) – Ch. 54, MCS2)


FCC ID: BCGA2837 IC: 579C-A2837	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 146 of 577

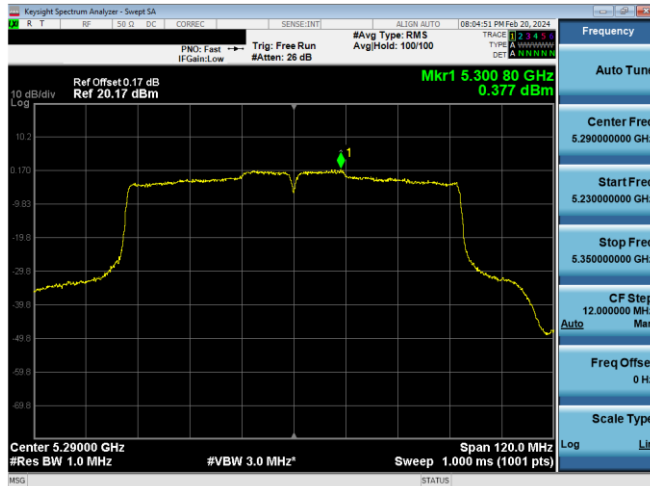


Plot 7-264. PSD Antenna WF5b (80MHz BW 802.11ac – Ch. 58, MCS2)

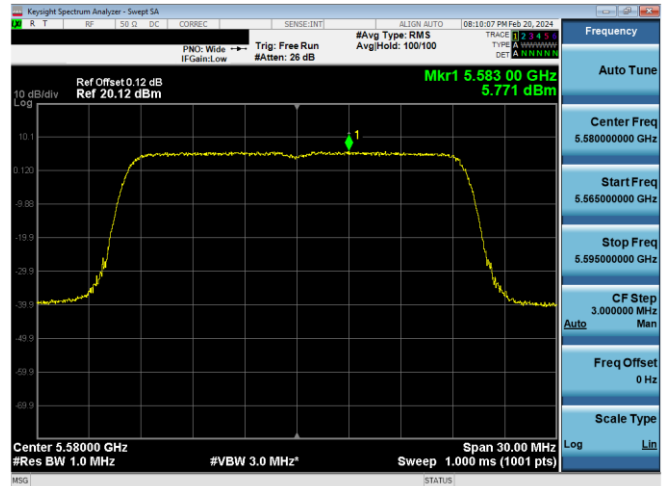


Plot 7-267. PSD Antenna WF5b (20MHz BW 802.11ax(SU) – Ch. 116, MCS2)

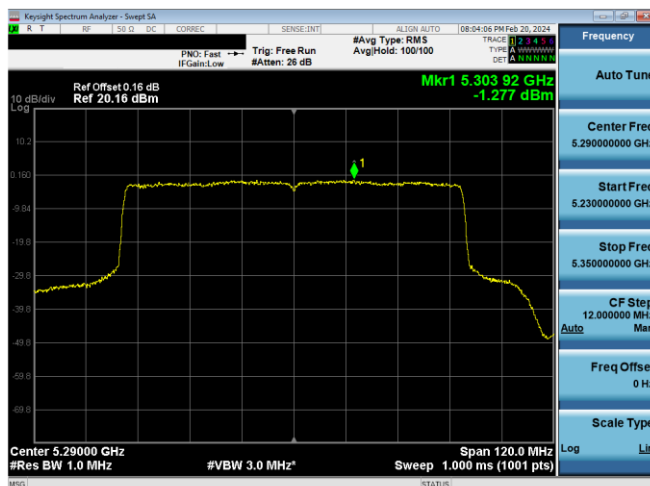


Plot 7-265. PSD Antenna WF5b (80MHz BW 802.11ax(SU) – Ch. 58, MCS2)

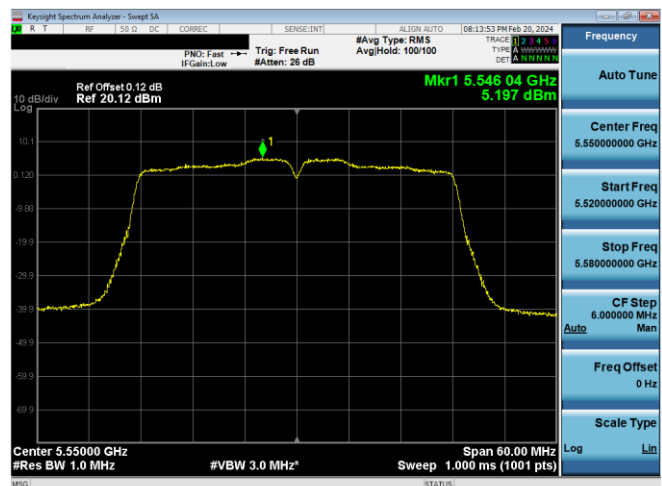

Plot 7-268. PSD Antenna WF5b (40MHz BW 802.11n – Ch. 110, MCS2)

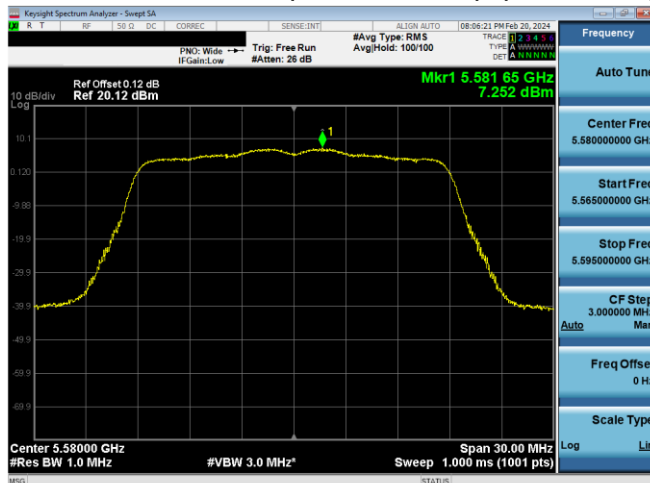

Plot 7-266. PSD Antenna WF5b (20MHz BW 802.11n – Ch. 116, MCS2)

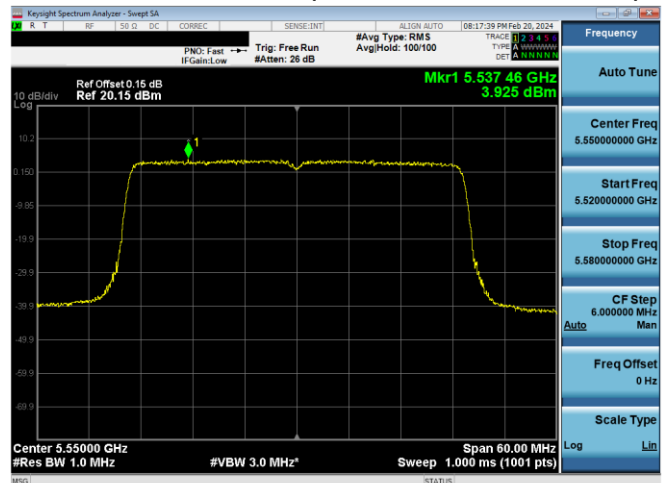

Plot 7-269. PSD Antenna WF5b (40MHz BW 802.11ax(SU) – Ch. 110, MCS2)

FCC ID: BCGA2837 IC: 579C-A2837	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-22.BCG	Test Dates: 11/28/2023 - 1/15/2024	EUT Type: Tablet Device	Page 147 of 577