



TEST REPORT

Test Report No.: UL-EMC-RP14247018JD18A V2.0

Manufacturer : Apple Inc.
Type of Equipment : Broadband Data Transmission Equipment (Bluetooth)
Model No. / PMN : Siri Remote
HVIN : A2854
FCC ID : BCGA2854
**ISED Canada
Certification No.** : 579C-A2854
Test Standard : 47CFR15.107, 47CFR15.109 and ICES-003 issue 7 October 2020
Test Result : Complied

Version 2.0 supersedes all previous versions

1. This report may not be reproduced except in full, without the written approval of UL International (UK) Ltd.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the above standards.
4. The test results in this report are traceable to the national or international standards.

Date of issue: 13 October 2022

Checked by:

Adam Brown
Laboratory Test Engineer



Company Signatory:

Matthew Owen
Operations Leader



This laboratory is accredited by the United Kingdom Accreditation Service (UKAS).
UKAS is one of the signatories to the International Laboratory Accreditation Co-operation (ILAC) Arrangement for the mutual recognition of test reports.
The tests reported herein have been performed in accordance with its terms of accreditation.

UL International (UK) Ltd

Units 1-3 Horizon, Kingsland Business Park, Wade Road, Basingstoke, Hampshire, RG24 8AH, UK.

Telephone: +44 (0)1256 312000

This page has been intentionally left blank.

TABLE OF CONTENTS

1. Customer Details	4
2. Summary of Testing	5
3. Equipment under Test (EUT)	6
4. Support Equipment	7
5. Measurement Uncertainty and Decision Rule	8
6. Measurements, Examinations and Derived Results	9
7. Graphical Test Results	14
8. Test Configuration Drawing	19
9. Report Revision History	21

Trademarks:

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners.

UL International (UK) Ltd claims no ownership of these except for any which are indicated as being the property of UL International (UK) Ltd or its subsidiaries and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by UL International (UK) Ltd of products, services or organisations associated with those trademarks.

1. CUSTOMER DETAILS

Company Name:	Apple Inc.
Address:	1 Apple Park Way Cupertino CA 95014 USA
Contact Name:	Stuart Thomas

2. SUMMARY OF TESTING

2.1. Test Specification

	Reference:	47CFR15.107 and 47CFR15.109
1.	Title:	Code of Federal Regulations - Title 47 (Telecommunication): Part 15 (Radio Frequency Devices) - Subpart B (Unintentional Radiators) – Sections 15.107 and 15.109 October 1, 2020 Edition (including all applicable amendments up to 24 August 2022)
2.	Reference:	ICES-003 issue 7 October 2020
	Title:	Information Technology Equipment (including Digital Apparatus)
Site Registration:		FCC: 621311/UK2011 ISED Canada: 20903/UK0001

2.2. Summary of Test Results

FCC Reference	ISED Reference	Measurement Type	Port	Result
15.107	3.2.1	Conducted Emissions	AC Mains Input / Output Ports	Complied
15.109	3.2.2	Radiated Emissions	Enclosure	Complied

2.3. Location of Testing

All the measurements described in this report were performed at the premises of UL International (UK) Ltd, Unit 1 Horizon, Wade Road, Kingsland Business Park, Basingstoke, Hampshire RG24 8AH.

2.4. Deviations from the Test Specification

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above, nor from the requirements defined in the basic standards called up within it.

3.3. EQUIPMENT UNDER TEST (EUT)**3.1. Description of EUT**

The EUT was a Remote Control, operating using Bluetooth Low Energy.

3.2. Identification of Equipment under Test (EUT)

ID#	Description	Brand Name	Model No	Serial No
E1	Remote Control	Apple	A2854	C08HR0TY1PL8

3.3. Port Identification

Port	Description	Possible Length (m)	Type	Connector
P1.1	Enclosure	Not applicable	Enclosure	Not applicable
P1.2	USB	< 3	Signal / DC Power	USB Type-C

3.4. Operating Modes

Mode Reference	Definition
Normal Operation	The EUT was set to RX mode and also It was connected to a supporting AC to DC adapter for charging.

3.5. Configuration and Peripherals

Description:	Please refer to the Test Configuration and Photograph section for schematic drawing(s) of the test configuration(s) employed in the course of testing.
--------------	--

3.6. Modifications

No modifications were made to the EUT during the course of testing.

3.7. Additional Information Related to Testing

Equipment Category:	Broadband Data Transmission Equipment (Bluetooth)
Intended Operating Environment:	Residential / Commercial
Intended Installation:	Hand Held
Power Supply Requirement(s):	5.1 VDC for AC to DC Power Adapter powered from 230 VAC, 50 Hz 3.8 VDC Internal Battery
Weight:	66 g
Dimensions:	136 mm x 36 mm x 9 mm
Hardware Version Number:	REV 1.0
Software Version Number:	V0016
Cycle Time:	Less than 1 second
Highest Internally Generated Operating Frequency:	2483.5 MHz
FCC ID Number:	BCGA2854
Industry Canada Certification Number:	579C-A2854
Antenna Type:	Integral

4. SUPPORT EQUIPMENT

4.1. Identification of Support Equipment

Description	Manufacturer	Model No	Serial No
AC to DC Power Adapter	Apple	A2347	Non-Stated
Programming Cable ¹	Apple	Chimp	428A48
Notebook PC ¹	Apple	A2251	C02CH0SNML7H

Notes:

1. This equipment was used to configure the EUT into a Rx mode and then removed for the tests.

4.2. Interconnecting Cables

Cable Type	Shielded	Length (m)	Ferrite	Connection 1	Connection 2
USB Type-C	Yes	1.0	No	EUT	AC to DC Power Adapter
Direct Connection				AC to DC Power Adapter	AC Supply
USB Type-C ¹	Yes	0.08	No	EUT	Programming Cable
USB ¹	Yes	1.0	No	Programming Cable	Notebook PC

Notes:

1. This connection was used during initial setup of the EUT and for performing the PER check only.

4.3. Interconnecting Cables

Cable Type	Shielded	Length (m)	Ferrite	Connection 1	Connection 2
USB Type-C	Yes	1.0	No	EUT	AC to DC Power Adapter
Direct Connection				AC to DC Power Adapter	AC Supply

4.4. Identification of Software

Software	Version	Manufacturer	Comments
CoolTerm	1.8.0.3.861	http://freeware.the-meiers.org	Used to configure the EUT into a Rx mode

5. MEASUREMENT UNCERTAINTY AND DECISION RULE

5.1. Overview

5.1.1. No measurement can ever be perfect and those imperfections give rise to error. Consequently, the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement regarding the uncertainty of approximation.

5.1.2. Note that compliance is determined solely upon the results of compliance measurements and does not take into account measurement uncertainties. The measurement uncertainty values quoted in this report are for information only as they do not influence the associated test results.

5.2. Method of Calculation

The methods used to calculate the uncertainties included within this test report are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty, the published guidance of the United Kingdom Accreditation Service (UKAS) is followed.

5.3. Equipment Accuracy and Decision Rule

Measurement system instrumentation with an accuracy specification meeting the accuracy specification limits or that has an uncertainty within prescribed limits detailed in the specification or standard shall be used. When providing a statement of conformity to a technical specification or standard, unless inherent in the requested technical specification or standard, the decision rule applied shall be the Accuracy Method (as defined in IEC Guide 115) in determining compliance. The measurement result is considered in conformance with the requirement criteria if it is within the prescribed limit.

6. MEASUREMENTS, EXAMINATIONS AND DERIVED RESULTS

6.1. General Comments

6.1.1. This section contains the test result sheets for the measurements listed in Section **2.2. Summary of Test Results (above)**.

6.1.2. The measurement uncertainties stated in the test result sheets were calculated in accordance with documented best practice and represent a confidence level of 95%. Where only confidence level is given, it has been demonstrated that the relevant items of test equipment used meet the specified requirements in the standard with at least this level of confidence.

6.1.3. Please refer to Section **6. Measurement Uncertainty and Decision Rule** on page **8** for details of our treatment of measurement uncertainty.

RADIATED EMISSIONS - TEST RESULTS

This test is covered by the scope of UL International (UK) Ltd's UKAS Accreditation under ISO/IEC 17025:2017.

GENERAL INFORMATION

JOB NUMBER:	14247018JD18	TEST SITE ID:	Site 51
EUT:	A2854	TEMPERATURE:	22 °C to 22 °C
TEST ENGINEER:	Vinicius Ribeiro	RELATIVE HUMIDITY:	59 % to 59 %
DATE OF TEST:	07 Sep 2022	ATMOSPHERIC PRESSURE:	1010mb to 1010 mb
FIELD TYPE:	Electric Field	MEASUREMENT DISTANCE:	3 Metres
UNCERTAINTY:	< 1 GHz: ± 3.91 dB > 1 GHz: ± 3.45 dB	EQUIPMENT CLASS:	Class B
MEASUREMENT UNITS:	dB μ V/m	TEST ENVIRONMENT:	Test Site

TEST SPECIFICATION DETAILS

The EUT has been configured and tested in accordance with the methods and procedures detailed within the following basic standard:

REFERENCE:	ANSI C63.4:2014
TITLE:	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

COMMENTS

○ Measurements were performed in a semi-anechoic chamber, at distances of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable.

Below 1 GHz, maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.

Above 1 GHz, the orientation of the EUT emanating the highest emission levels was determined using exploratory measurements with an antenna and spectrum analyser prior to the formal measurements. For the final test, emissions the EUT was rotated whilst positioned in the previously determined worst case orientation only.

○ The recorded disturbance level (field strength) was calculated from the level indicated by the measuring receiver, adjusted by a correction factor (CF in dB), calculated using the formula:

$$CF (dB) = CAtt (dB) + AF (dB/m) - PGain (dB)$$

Where:

CAtt (dB): Conducted Path Attenuation (Cables + Attenuators)

AF (dB/m): Antenna Factor

PGain (dB): External Preamplifier Gain

DEVIATIONS FROM TEST SPECIFICATION

There were no deviations from the test configuration and measurement arrangements defined in the test specification (identified above).

EUT RELATED

OPERATING MODE:	General Operation
FUNCTION(S) MONITORED:	Not Applicable

MEASUREMENT RESULTS

No.	Frequency (MHz)	Polarisation	Detector	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Graph No.	Result
1	79.078	Vertical	Quasi-Peak	9.4	40.0	30.6	GPH\14247018JD18\001	Complied
2	83.555	Vertical	Quasi-Peak	9.3	40.0	30.7	GPH\14247018JD18\001	Complied
3	93.398	Vertical	Quasi-Peak	11.4	43.5	32.1	GPH\14247018JD18\001	Complied
4	210.397	Horizontal	Quasi-Peak	10.7	43.5	32.8	GPH\14247018JD18\001	Complied
5	335.378	Vertical	Quasi-Peak	15.0	46.0	31.0	GPH\14247018JD18\001	Complied
6	752.979	Vertical	Quasi-Peak	23.7	46.0	22.3	GPH\14247018JD18\001	Complied
7	1000 to 12750	Refer to Note 1				GPH\14247018JD18\002 to 005		Complied

NOTES

1	No emissions were noted above the noise floor of the measurement system; therefore, no further measurements were made.
---	--

TEST EQUIPMENT USED

UL ID	INSTRUMENT DESCRIPTION	MODEL NUMBER	CALIBRATION DUE	INTERVAL
A3196	Radiated Emissions Software	EMC32 V10.50.10	Calibration not required	N/A
K0031	3m Semi-Anechoic Chamber 1	N/A	14 Feb 2023	12
M2047	Thermo-Hygrometer	608-H1	09 Dec 2022	12
M2049	44 GHz EMI Test Receiver	ESW44	01 Jun 2023	12
A2959	Trilog Broadband Antenna	VULB 9163	03 Feb 2023	12
A3047	6 dB attenuator - 5W	N/A	Calibrated as part of system	N/A
C1872	8 metre N-male to N-male RF cable	Sucoflex 104A	13 May 2023	12
C1823	15 metre N-male to N-male RF cable	Sucoflex 104A	15 Aug 2023	12
C1830	2 metre N-male to N-male RF cable	Sucoflex 104A	15 Aug 2023	12
A3157	3 dB Attenuator	1812 BW-N3 W5	15 Aug 2023	12
A3149	10 MHz to 1.3 GHz Low Noise Pre-Amplifier	LNA - 1330	15 Aug 2023	12
C1768	1 metre N-male to N-male RF cable	SA90-195-1MTR	16 May 2023	12
A3076	3 dB Attenuator	1812 BW-N3 W5+	15 Aug 2023	12
A2949	500 MHz to 18 GHz Pre-amplifier	PAM-118A	21 Sep 2022	12
C1801	2 metre N-male to N-male RF cable	SA90-195-2MTR	16 May 2023	12
C1671	5 metre N-male to N-male RF cable	SA90-195-5MTR	16 May 2023	12
A208241	1 -10 GHz Horn Antenna	BBHA 9120 B	04 Aug 2023	12
C220215	1 metre N-male to SMA-male RF cable	MFR57500	15 Aug 2023	12
A1933	3 GHz High Pass Filter	AFH-03000	12 Jan 2023	24
A208371	7.5 - 18 GHz Horn Antenna	HWRD 750	07 Jun 2023	12

CONDUCTED EMISSIONS - TEST RESULTS

This test is covered by the scope of UL International (UK) Ltd's UKAS Accreditation under ISO/IEC 17025:2017.

GENERAL INFORMATION

JOB NUMBER:	14247018JD18	TEST SITE ID:	Site 56
EUT:	A2854	TEMPERATURE:	21 °C To 24 °C
TEST ENGINEER:	Vinicius Ribeiro and Pete Fox	RELATIVE HUMIDITY:	51 % To 47 %
DATE OF TEST:	30 Aug 2022	ATMOSPHERIC PRESSURE:	1023 mb To 1023 mb
UNCERTAINTY:	± 1.96 dB	EQUIPMENT CLASS:	Class B
EUT CATEGORY:	Not Applicable	MEASUREMENT METHOD:	LISN (AC)
PORT UNDER TEST:	AC Power Input	EUT SUPPLY VOLTAGE:	120 VAC / 60 Hz

TEST SPECIFICATION DETAILS

The EUT has been configured and tested in accordance with the methods and procedures detailed within the following basic standard:

REFERENCE:	ANSI C63.4:2014
TITLE:	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

COMMENTS

The recorded disturbance level (voltage) was calculated from the level indicated by the measuring receiver, adjusted by a correction factor (CF in dB), calculated using the formula:

$$CF (dB) = CAtt (dB) + PLAtt (dB) + VDF (dB)$$

Where:

CAtt (dB): Conducted Path Attenuation (Cables + Attenuators)

PLAtt (dB): Pulse Limiter Attenuation

VDF (dB): Voltage Division Factor of LISN

DEVIATIONS FROM TEST SPECIFICATION

There were no deviations from the test configuration and measurement arrangements defined in the test specification (identified above).

EUT RELATED

OPERATING MODE:	Normal Operation
FUNCTION(S) MONITORED:	Not Applicable

MEASUREMENT RESULTS

No.	Frequency (MHz)	Line	Detector	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Graph No.	Result
1	0.150	Live	Quasi-Peak	21.7	66.0	44.3	GPH\14247018JD18\006	Complied
2	0.206	Live	Quasi-Peak	20.5	63.4	42.9	GPH\14247018JD18\006	Complied
3	0.431	Live	Quasi-Peak	19.0	57.2	38.3	GPH\14247018JD18\006	Complied
4	5.350	Live	Quasi-Peak	16.0	60.0	44.0	GPH\14247018JD18\006	Complied
5	15.797	Live	Quasi-Peak	15.2	60.0	44.8	GPH\14247018JD18\006	Complied
6	26.466	Live	Quasi-Peak	18.8	60.0	41.2	GPH\14247018JD18\006	Complied
7	0.202	Live	CISPR Average	15.2	53.5	38.3	GPH\14247018JD18\006	Complied
8	0.249	Live	CISPR Average	14.1	51.8	37.7	GPH\14247018JD18\006	Complied
9	0.431	Live	CISPR Average	17.4	47.2	29.8	GPH\14247018JD18\006	Complied
10	5.350	Live	CISPR Average	15.0	50.0	35.0	GPH\14247018JD18\006	Complied
11	15.790	Live	CISPR Average	14.2	50.0	35.8	GPH\14247018JD18\006	Complied
12	26.471	Live	CISPR Average	17.0	50.0	33.0	GPH\14247018JD18\006	Complied
13	0.202	Neutral	Quasi-Peak	22.4	63.5	41.2	GPH\14247018JD18\007	Complied
14	0.431	Neutral	Quasi-Peak	21.7	57.2	35.6	GPH\14247018JD18\007	Complied

MEASUREMENT RESULTS

No.	Frequency (MHz)	Line	Detector	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Graph No.	Result
15	0.987	Neutral	Quasi-Peak	15.5	56.0	40.5	GPH\14247018JD18\007	Complied
16	5.350	Neutral	Quasi-Peak	16.0	60.0	44.0	GPH\14247018JD18\007	Complied
17	15.905	Neutral	Quasi-Peak	16.6	60.0	43.4	GPH\14247018JD18\007	Complied
18	26.228	Neutral	Quasi-Peak	19.9	60.0	40.1	GPH\14247018JD18\007	Complied
19	0.200	Neutral	CISPR Average	18.8	53.6	34.9	GPH\14247018JD18\007	Complied
20	0.431	Neutral	CISPR Average	20.1	47.2	27.2	GPH\14247018JD18\007	Complied
21	0.987	Neutral	CISPR Average	13.9	46.0	32.1	GPH\14247018JD18\007	Complied
22	5.350	Neutral	CISPR Average	14.9	50.0	35.1	GPH\14247018JD18\007	Complied
23	15.902	Neutral	CISPR Average	15.1	50.0	34.9	GPH\14247018JD18\007	Complied
24	26.230	Neutral	CISPR Average	17.9	50.0	32.1	GPH\14247018JD18\007	Complied

TEST EQUIPMENT USED


UL ID	INSTRUMENT DESCRIPTION	MODEL NUMBER	CALIBRATION DUE	INTERVAL
A3197	Conducted Emissions Software	EMC32 V10.40.10	Calibration not required	N/A
K0036	Conducted Emissions / Immunity Test Laboratory 2	N/A	Calibration not required	N/A
M2046	Thermo-Hygrometer	608-H1	09 Dec 2022	12
M2051	3.6 GHz EMI Test Receiver	ESR3	21 Oct 2022	12
N0613	Site 56 Test PC	Motherboard Asus Z97-P	Calibration not required	N/A
A1828	N-Type Pulse Limiter	ESH3-Z2	04 Nov 2022	12
C1619	Type N - Coaxial Cable	Sucoflex 104A	04 Nov 2022	12
A2883	Single Phase LISN	ENV216	05 Jan 2023	12
A3261	Matched LISN Power Cable Assembly	None Stated	28 Mar 2023	12
M524	300V 4800VA 1ph Harmonics/Flicker Test system	6843A	Calibration not required	N/A

7. GRAPHICAL TEST RESULTS


7.1. This section contains the graphical results for the measurements listed in Section **2.2. Summary of Test Results (above)**.

Graph Reference Number	Title
GPH\14247018JD18\001	Radiated Emissions (30 MHz to 1 GHz)
GPH\14247018JD18\002	Radiated Emissions (1 GHz to 3 GHz)
GPH\14247018JD18\003	Radiated Emissions (3 GHz to 6 GHz)
GPH\14247018JD18\004	Radiated Emissions (6 GHz to 8 GHz)
GPH\14247018JD18\005	Radiated Emissions (8 GHz to 12.75 GHz)
GPH\14247018JD18\006	Conducted Emissions (150 kHz to 30 MHz) – Live
GPH\14247018JD18\007	Conducted Emissions (150 kHz to 30 MHz) – Neutral


GPH\14247018JD18\001 - Radiated Emissions (30 MHz to 1 GHz)

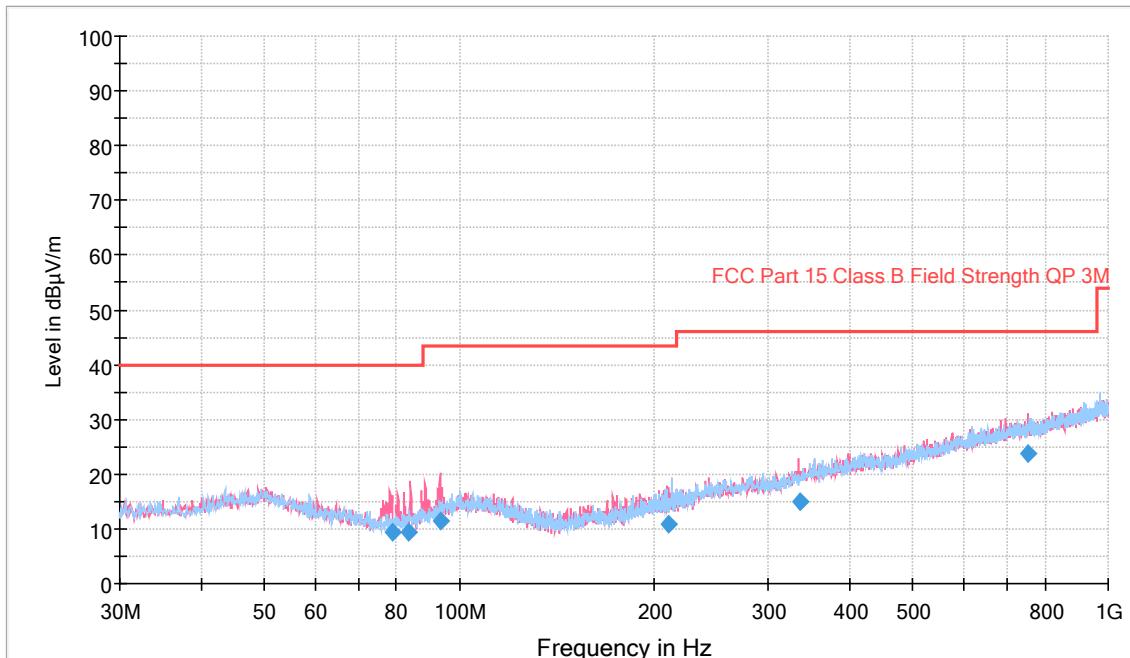


GPH\14247018JD18\002 - Radiated Emissions (1 GHz to 3 GHz)

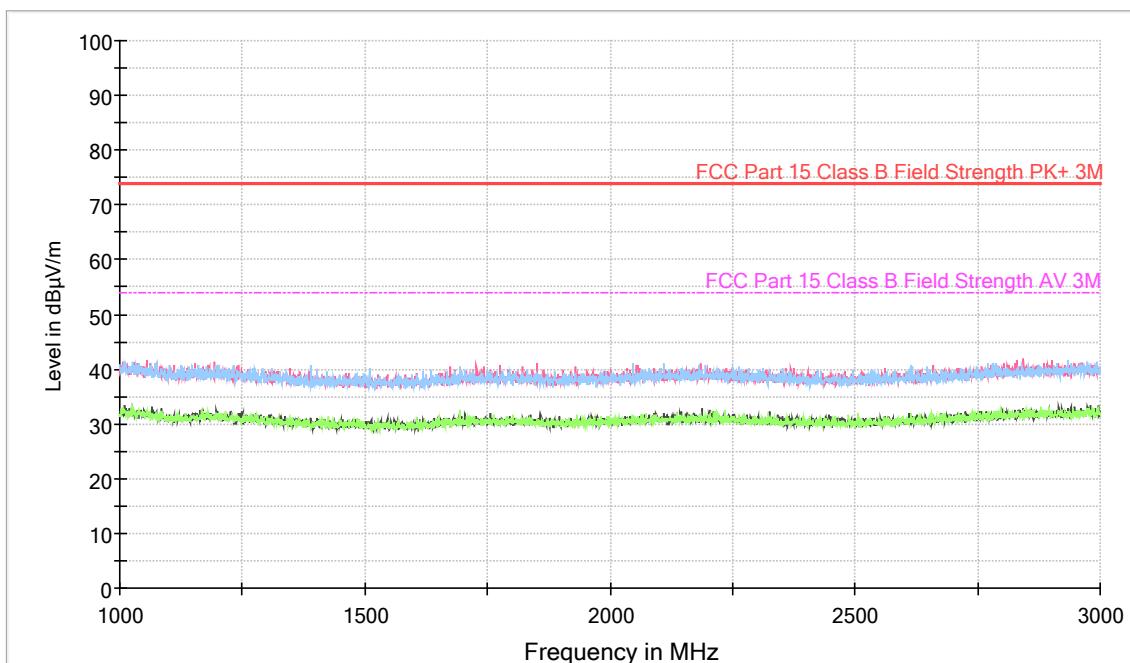


GPH\14247018JD18\003 - Radiated Emissions (3 GHz to 6 GHz)

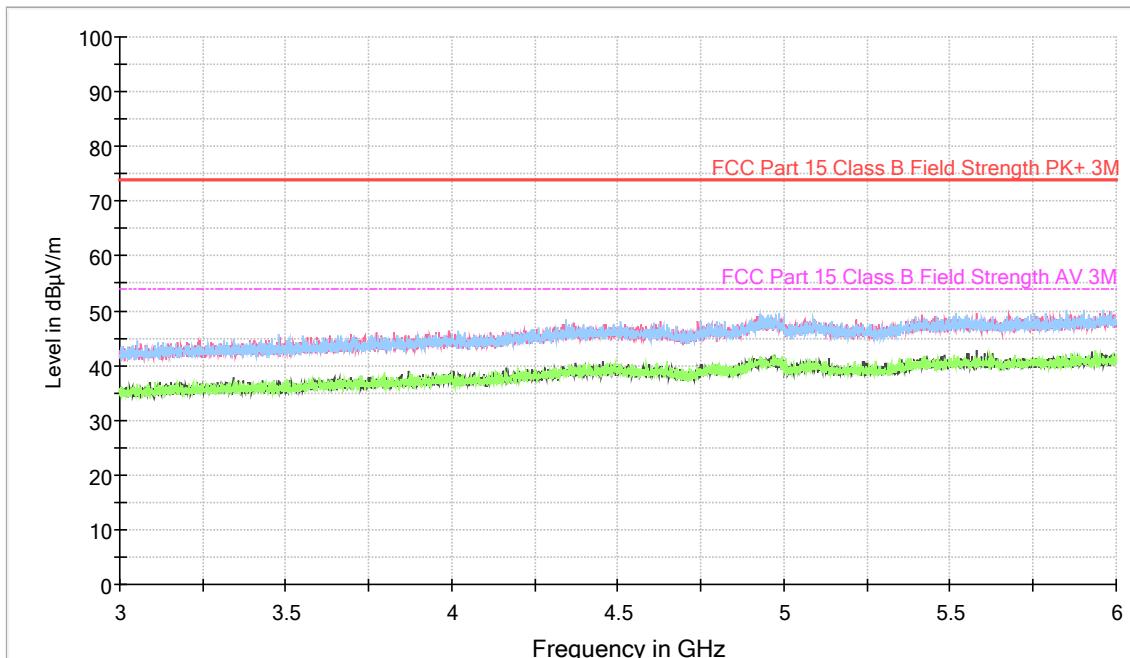


GPH\14247018JD18\004 - Radiated Emissions (6 GHz to 8 GHz)

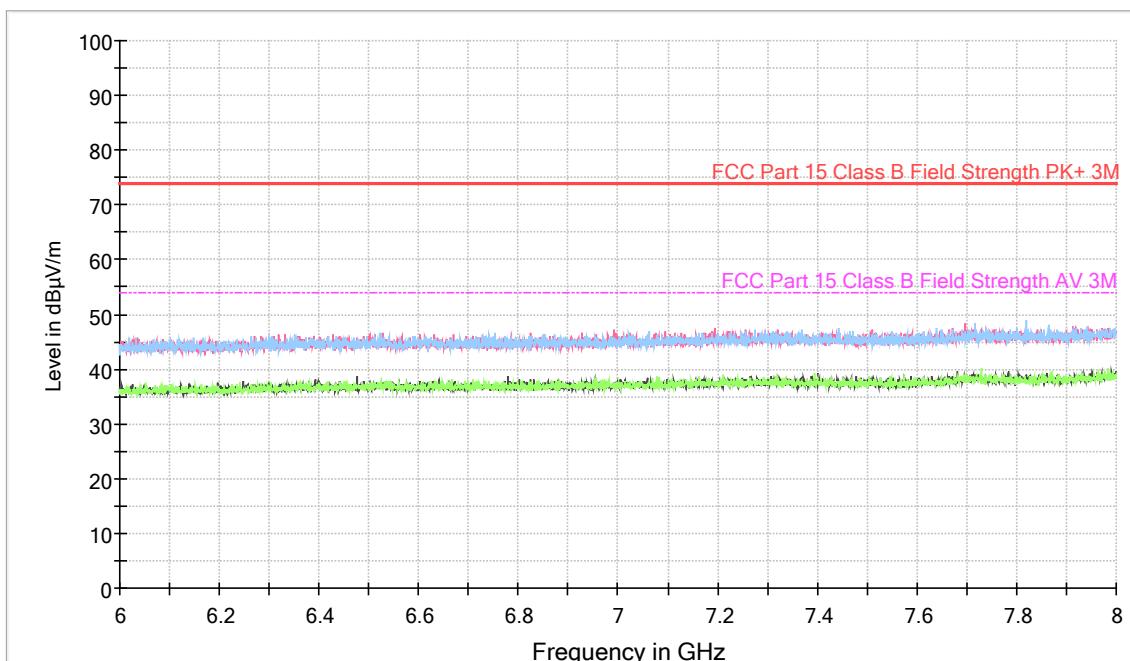


GPH\14247018JD18\005 - Radiated Emissions (8 GHz to 12.75 GHz)

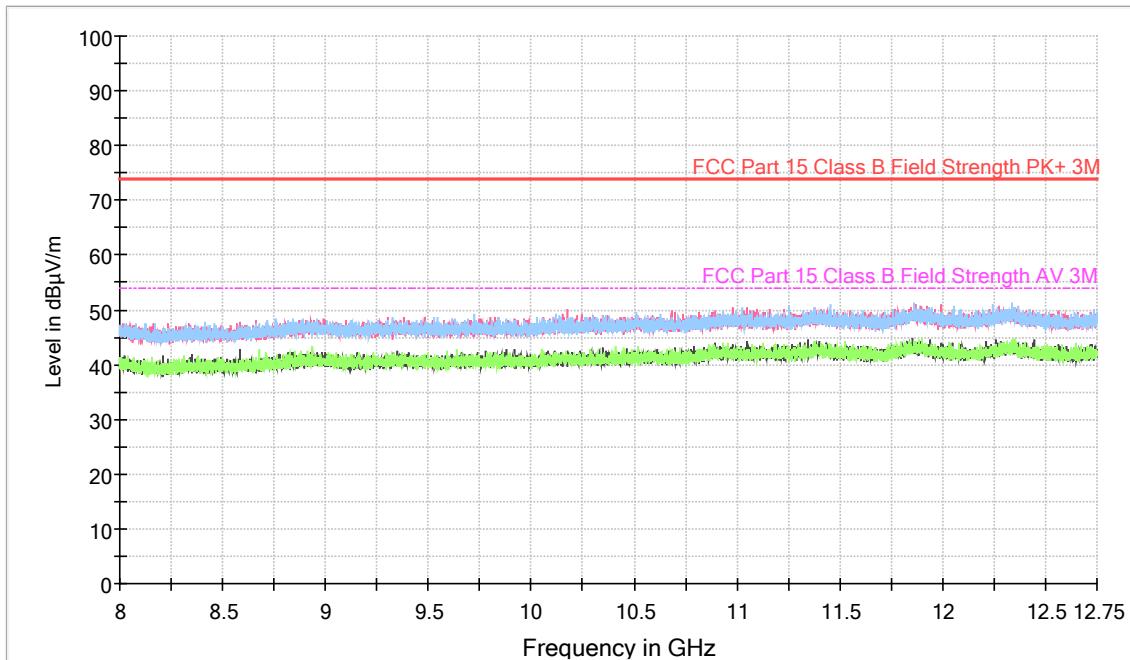

GPH\14247018JD18\006 - Conducted Emissions (150 kHz to 30 MHz) – Live

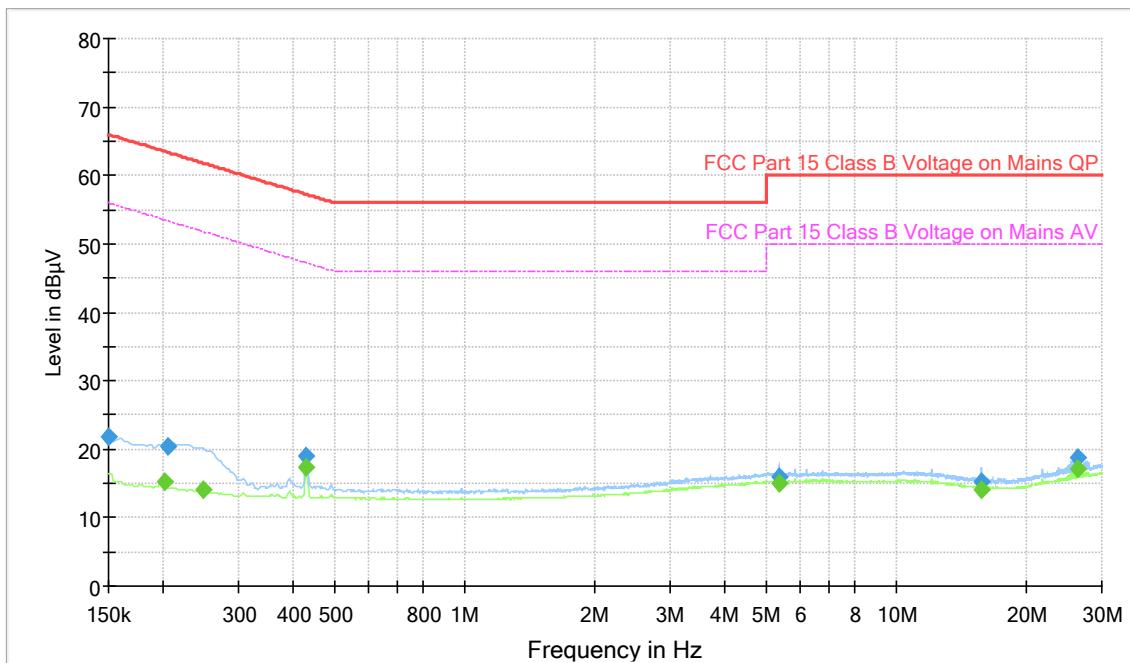


GPH\14247018JD18\007 - Conducted Emissions (150 kHz to 30 MHz) – Neutral

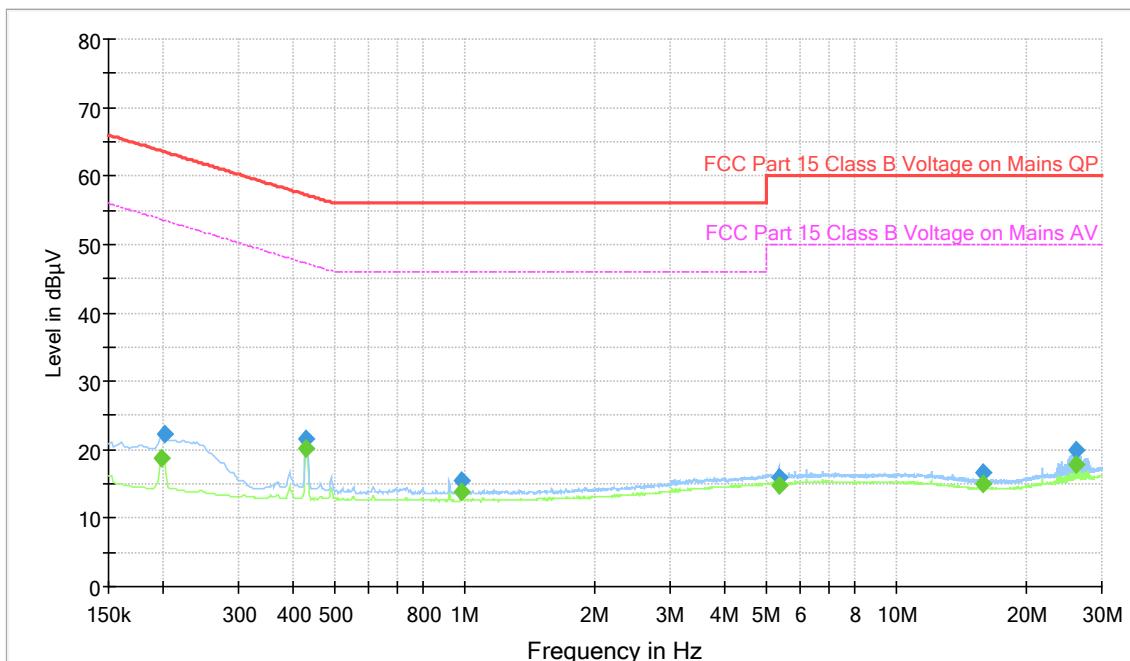

8. TEST CONFIGURATION DRAWING

8.1. This section contains the Test Configuration Drawings for the measurements listed in Section 7: Measurements, Examinations and Derived Results.

Test Configuration Reference Number	Title
DRG\14247018JD18\001	Schematic Diagram of the EUT, Support Equipment and Interconnecting Cables Used During Testing

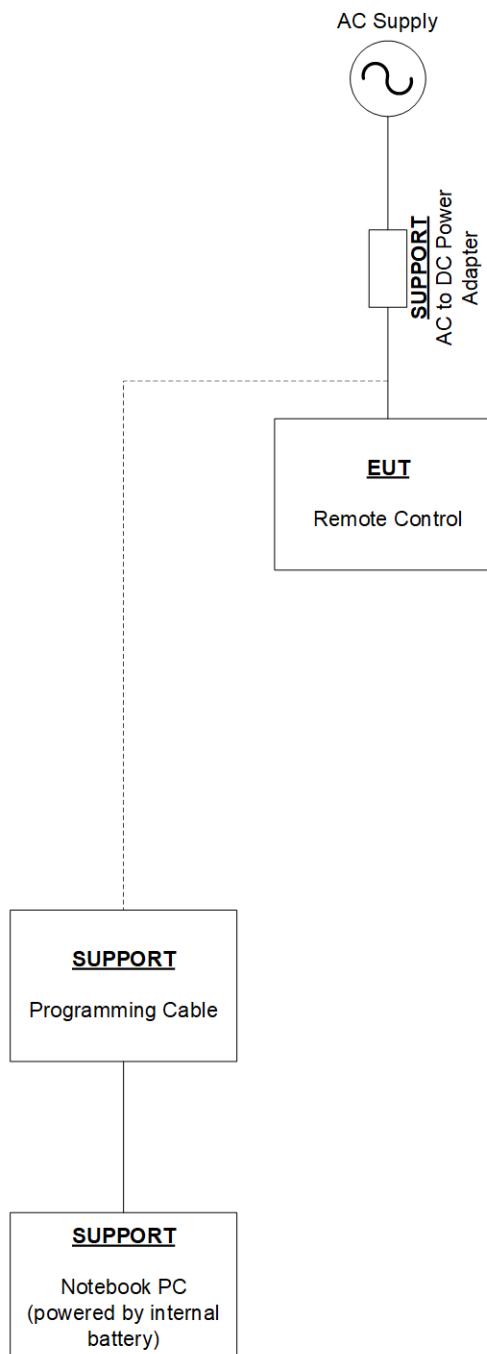DRG\14247018JD18\001 - Schematic Diagram of the EUT, Support Equipment and Interconnecting Cables Used During Testing**Configuration of EUT and Local Support Equipment**

9. REPORT REVISION HISTORY

9.1. This section contains the report revision history.

Version Number	Revision Details		
	Page No(s)	Clause	Details
1.0	-	-	Initial Version.
2.0	1	-	PMN updated to "Seri Remote" HVIN updated to "A2854"