

MEASUREMENT REPORT**FCC PART 15.407 / ISED RSS-248 UNII 802.11a/ax OFDM WIFI 6E****Applicant Name:**

Apple Inc.
One Apple Park Way
Cupertino, CA 95014
United States

Date of Testing:

11/29/2023 - 04/05/24

Test Report Issue Date:

4/5/2024

Test Site/Location:

Element Materials Technology, Morgan Hill, CA, USA

Test Report Serial No.:

1C2311270066-26-R3.BCG

FCC ID:

BCGA2899

IC:

579C-A2899

APPLICANT:

Apple Inc.

Application Type:

Certification

Model/HVIN:

A2899, A2900

EUT Type:

Tablet Device

Frequency Range:

5955 – 7115MHz

Modulation Type:

OFDM

FCC Classification:

15E 6GHz Low Power Dual Client (6CD)

FCC Rule Part(s):

Part 15 Subpart E (15.407)

ISED Specification:

RSS-248 Issue 2

Test Procedure(s):

ANSI C63.10-2013, KDB 789033 D02 v02r01


KDB 662911 D01 v02r01, KDB 987594 D02 v02r01

KDB 987594 D04 v02

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 789033 D02 v02r01. Test results reported herein relate only to the item(s) tested.

This revised Test Report (S/N: 1C2311270066-26-R3.BCG) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



RJ Ortanez
Executive Vice President

Prepared by: WKR0000010592

Reviewed by: WKR0000005805



FCC ID: BCGA2899 IC: 579C-A2899		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270066-26-R3.BCG	Test Dates: 11/29/2023 - 04/05/24	EUT Type: Tablet Device	Page 1 of 567

V 10.5 12/15/2021


T A B L E O F C O N T E N T S

1.0	INTRODUCTION.....	5
1.1	Scope	5
1.2	Element Materials Technology Test Location	5
1.3	Test Facility / Accreditations	5
2.0	PRODUCT INFORMATION	6
2.1	Equipment Description.....	6
2.2	Device Capabilities	6
2.3	Antenna Description	10
2.4	Test Support Equipment	10
2.5	Test Configuration	11
2.6	Software and Firmware.....	11
2.7	EMI Suppression Device(s)/Modifications.....	11
3.0	DESCRIPTION OF TESTS	12
3.1	Evaluation Procedure	12
3.2	AC Line Conducted Emissions	12
3.3	Radiated Emissions	13
3.4	Environmental Conditions.....	13
4.0	ANTENNA REQUIREMENTS	14
5.0	MEASUREMENT UNCERTAINTY	15
6.0	TEST EQUIPMENT CALIBRATION DATA	16
7.0	TEST RESULTS	17
7.1	Summary	17
7.2	26dB & 99% Bandwidth Measurement – 802.11a/ax(SU)	19
7.3	Conducted Output Power and Max EIRP Measurement – 802.11a/ax(SU).....	65
7.4	Maximum Power Spectral Density – 802.11a/ax(SU)	110
7.5	In-Band Emissions – 802.11a/ax(SU).....	245
7.6	Contention Based Protocol – 802.11a/ax(SU)	343
7.7	Radiated Spurious Emissions – Above 1GHz.....	364
7.8	Radiated Spurious Emissions – Below 1GHz	556
7.9	AC Line-Conducted Emissions Measurement	561
8.0	CONCLUSION	567


FCC ID: BCGA2899 IC: 579C-A2899		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270066-26-R3.BCG	Test Dates: 11/29/2023 - 04/05/24	EUT Type: Tablet Device	Page 2 of 567

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.



MEASUREMENT REPORT



UNII Band	Channel Bandwidth (MHz)	Mode	Tx Frequency (MHz)	SISO						SDM Primary		SDM Diversity	
				Antenna 5T		Antenna 3b		Antenna 1b		Summed		Summed	
				Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)
5	20	802.11a/ax	5955 - 6415	7.761	8.90	3.350	5.25	2.382	3.77	7.822	8.93	6.556	8.17
6		802.11a/ax	6435 - 6515	6.890	8.38	1.990	2.99	2.036	3.09	5.755	7.60	5.524	7.42
7		802.11a/ax	6535 - 6875	6.663	8.24	1.848	2.67	1.191	0.76	5.832	7.66	5.514	7.41
8		802.11a/ax	6895 - 7115	6.914	8.40	1.453	1.62	1.181	0.72	5.564	7.45	5.719	7.57
5	40	802.11ax	5965 - 6405	15.269	11.84	6.834	8.35	4.637	6.66	15.644	11.94	12.990	11.14
6		802.11ax	6445 - 6525	13.533	11.31	3.878	5.89	3.965	5.98	11.940	10.77	10.821	10.34
7		802.11ax	6565 - 6845	13.122	11.18	3.747	5.74	2.413	3.83	13.546	11.32	11.181	10.48
8		802.11ax	6885 - 7085	13.608	11.34	2.903	4.63	2.363	3.74	13.103	11.17	11.464	10.59
5	80	802.11ax	5985 - 6385	29.765	14.74	13.561	11.32	9.539	9.80	30.927	14.90	25.741	14.11
6		802.11ax	6465	27.296	14.36	7.777	8.91	8.019	9.04	23.175	13.65	21.691	13.36
7		802.11ax	6545 - 6865	25.918	14.14	7.565	8.79	4.802	6.81	26.965	14.31	21.801	13.38
8		802.11ax	6945 - 7025	27.265	14.36	5.691	7.55	4.687	6.71	26.144	14.17	22.507	13.52
5	160	802.11ax	6025 - 6345	52.107	17.17	23.335	13.68	16.523	12.18	53.499	17.28	45.774	16.61
6		802.11ax	6505	36.258	15.59	10.375	10.16	10.713	10.30	36.477	15.62	34.537	15.38
7		802.11ax	6665 - 6825	45.530	16.58	13.403	11.27	8.422	9.25	46.430	16.67	39.399	15.95
8		802.11ax	6985	48.551	16.86	10.273	10.12	8.209	9.14	46.065	16.63	40.487	16.07

EUT Overview Low Power Indoor(Low Rate)

UNII Band	Channel Bandwidth (MHz)	Mode	Tx Frequency (MHz)	SISO						SDM Primary		SDM Diversity	
				Antenna 5T		Antenna 3b		Antenna 1b		Summed		Summed	
				Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)
5	20	802.11a/ax	5955 - 6415	7.759	8.90	3.443	5.37	2.424	3.85	7.859	8.95	6.451	8.10
6		802.11a/ax	6435 - 6515	6.866	8.37	1.967	2.94	2.032	3.08	5.916	7.72	5.537	7.43
7		802.11a/ax	6535 - 6875	6.667	8.24	1.892	2.77	1.210	0.83	5.778	7.62	5.604	7.48
8		802.11a/ax	6895 - 7115	6.923	8.40	1.439	1.58	1.202	0.80	5.759	7.60	4.834	6.84
5	40	802.11ax	5965 - 6405	15.090	11.79	6.495	8.13	4.835	6.84	15.716	11.96	13.050	11.16
6		802.11ax	6445 - 6525	13.839	11.41	3.922	5.94	4.065	6.09	11.831	10.73	10.821	10.34
7		802.11ax	6565 - 6845	13.213	11.21	3.795	5.79	2.393	3.79	13.360	11.26	11.130	10.46
8		802.11ax	6885 - 7085	13.677	11.36	2.882	4.60	2.312	3.64	12.953	11.12	11.464	10.59
5	80	802.11ax	5985 - 6385	29.689	14.73	13.131	11.18	9.541	9.80	31.430	14.97	26.584	14.25
6		802.11ax	6465	27.102	14.33	7.672	8.85	8.128	9.10	22.544	13.53	21.492	13.32
7		802.11ax	6545 - 6865	26.718	14.27	7.561	8.79	4.649	6.67	26.534	14.24	22.258	13.47
8		802.11ax	6945 - 7025	27.791	14.44	5.675	7.54	4.624	6.65	26.447	14.22	22.404	13.50
5	160	802.11ax	6025 - 6345	52.638	17.21	23.796	13.77	17.140	12.34	54.368	17.35	45.985	16.63
6		802.11ax	6505	35.785	15.54	10.426	10.18	10.583	10.25	37.499	15.74	34.616	15.39
7		802.11ax	6665 - 6825	45.102	16.54	12.809	11.08	8.187	9.13	46.324	16.66	39.218	15.93
8		802.11ax	6985	48.428	16.85	9.924	9.97	8.422	9.25	45.748	16.60	40.024	16.02

EUT Overview Low Power Indoor (Mid Rate)

UNII Band	Channel Bandwidth (MHz)	Mode	Tx Frequency (MHz)	SISO						SDM Primary		SDM Diversity	
				Antenna 5T		Antenna 3b		Antenna 1b		Summed		Summed	
				Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)
5	20	802.11a/ax	5955 - 6415	7.668	8.85	3.336	5.23	2.329	3.67	7.822	8.93	6.541	8.16
6		802.11a/ax	6435 - 6515	6.844	8.35	1.992	2.99	2.032	3.08	5.862	7.68	5.474	7.38
7		802.11a/ax	6535 - 6875	6.728	8.28	1.868	2.71	1.171	0.68	5.805	7.64	5.502	7.40
8		802.11a/ax	6895 - 7115	6.850	8.36	1.444	1.60	1.200	0.79	6.567	8.17	5.719	7.57
5	40	802.11ax	5965 - 6405	14.771	11.69	6.762	8.30	4.772	6.79	15.218	11.82	13.201	11.21
6		802.11ax	6445 - 6525	13.640	11.35	3.890	5.90	3.953	5.97	11.804	10.72	10.896	10.37
7		802.11ax	6565 - 6845	13.351	11.26	3.768	5.76	2.379	3.76	13.515	11.31	11.155	10.47
8		802.11ax	6885 - 7085	13.627	11.34	2.814	4.49	2.363	3.73	13.103	11.17	11.411	10.57
5	80	802.11ax	5985 - 6385	30.360	14.82	12.747	11.05	9.502	9.78	30.644	14.86	25.563	14.08
6		802.11ax	6465	27.158	14.34	7.780	8.91	7.780	8.91	23.552	13.72	21.492	13.32
7		802.11ax	6545 - 6865	26.110	14.17	7.386	8.68	4.703	6.72	26.965	14.31	21.953	13.41
8		802.11ax	6945 - 7025	27.089	14.33	5.800	7.63	4.729	6.75	26.325	14.20	22.926	13.60
5	160	802.11ax	6025 - 6345	54.051	17.33	23.801	13.77	16.715	12.23	53.622	17.29	46.732	16.70
6		802.11ax	6505	35.950	15.56	10.306	10.13	10.762	10.32	37.070	15.69	34.696	15.40
7		802.11ax	6665 - 6825	45.983	16.63	13.384	11.27	8.404	9.25	47.294	16.75	39.218	15.93
8		802.11ax	6985	48.084	16.82	10.000	10.00	8.379	9.23	46.065	16.63	39.840	16.00

EUT Overview Low Power Indoor (High Rate)

FCC ID: BCGA2899 IC: 579C-A2899			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270066-26-R3.BCG	Test Dates: 11/29/2023 - 04/05/24	EUT Type: Tablet Device	Page 3 of 567	

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

UNII Band	Channel Bandwidth (MHz)	Mode	Tx Frequency (MHz)	SISO						CDD/SDM Primary		CDD/SDM Diversity	
				Antenna 5T		Antenna 3b		Antenna 1b		Summed		Summed	
				Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)
5	20	802.11a/ax	5955 - 6415	167.494	22.24	73.232	18.65	33.900	15.30	328.852	25.17	234.963	23.71
7		802.11a/ax	6535 - 6875	177.337	22.49	50.676	17.05	20.286	13.07	359.749	25.56	249.459	23.97
5	40	802.11ax	5965 - 6405	168.267	22.26	73.097	18.64	33.768	15.29	342.768	25.35	234.963	23.71
7		802.11ax	6565 - 6845	168.035	22.25	51.133	17.09	20.253	13.07	360.579	25.57	241.546	23.83
5	80	802.11ax	5985 - 6385	161.920	22.09	77.553	18.90	34.650	15.40	322.849	25.09	233.346	23.68
7		802.11ax	6545 - 6865	166.725	22.22	51.357	17.11	20.531	13.12	345.939	25.39	239.883	23.80
5	160	802.11ax	6025 - 6345	171.159	22.33	70.065	18.46	32.449	15.11	341.193	25.33	247.172	23.93
7		802.11ax	6665 - 6825	174.622	22.42	48.040	16.82	19.575	12.92	351.560	25.46	249.459	23.97

EUT Overview Standard Power (Low Rate)

UNII Band	Channel Bandwidth (MHz)	Mode	Tx Frequency (MHz)	SISO						CDD/SDM Primary		CDD/SDM Diversity	
				Antenna 5T		Antenna 3b		Antenna 1b		Summed		Summed	
				Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)
5	20	802.11a/ax	5955 - 6415	173.460	22.39	75.041	18.75	34.127	15.33	340.408	25.32	243.781	23.87
7		802.11a/ax	6535 - 6875	174.261	22.41	52.408	17.19	20.621	13.14	359.749	25.56	250.611	23.99
5	40	802.11ax	5965 - 6405	169.785	22.30	71.746	18.56	34.143	15.33	342.768	25.35	245.471	23.90
7		802.11ax	6565 - 6845	165.997	22.20	52.107	17.17	20.635	13.15	359.749	25.56	251.768	24.01
5	80	802.11ax	5985 - 6385	173.460	22.39	75.197	18.76	34.698	15.40	331.131	25.20	247.172	23.93
7		802.11ax	6545 - 6865	167.958	22.25	52.264	17.18	21.188	13.26	352.371	25.47	246.037	23.91
5	160	802.11ax	6025 - 6345	170.608	22.32	68.517	18.36	32.494	15.12	332.660	25.22	236.048	23.73
7		802.11ax	6665 - 6825	169.434	22.29	46.752	16.70	19.643	12.93	355.631	25.51	243.220	23.86

EUT Overview Standard Power (Mid Rate)

UNII Band	Channel Bandwidth (MHz)	Mode	Tx Frequency (MHz)	SISO						CDD/SDM Primary		CDD/SDM Diversity	
				Antenna 5T		Antenna 3b		Antenna 1b		Summed		Summed	
				Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)
5	20	802.11a/ax	5955 - 6415	162.555	22.11	71.614	18.55	32.772	15.16	317.687	25.02	229.615	23.61
7		802.11a/ax	6535 - 6875	168.229	22.26	50.211	17.01	19.751	12.96	345.144	25.38	238.232	23.77
5	40	802.11ax	5965 - 6405	161.920	22.09	69.647	18.43	32.915	15.17	325.837	25.13	232.809	23.67
7		802.11ax	6565 - 6845	161.547	22.08	52.481	17.20	20.022	13.02	347.536	25.41	236.592	23.74
5	80	802.11ax	5985 - 6385	157.181	21.96	71.928	18.57	33.690	15.28	326.588	25.14	234.423	23.70
7		802.11ax	6545 - 6865	162.069	22.10	52.432	17.20	20.310	13.08	346.737	25.40	238.232	23.77
5	160	802.11ax	6025 - 6345	163.870	22.15	68.470	18.36	31.908	15.04	322.107	25.08	221.820	23.46
7		802.11ax	6665 - 6825	175.106	22.43	46.817	16.70	19.797	12.97	337.287	25.28	229.087	23.60

EUT Overview Standard Power (High Rate)

FCC ID: BCGA2899 IC: 579C-A2899	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270066-26-R3.BCG	Test Dates: 11/29/2023 - 04/05/24	EUT Type: Tablet Device	Page 4 of 567

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Materials Technology Test Location

These measurement tests were conducted at the Element Materials Technology facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element Materials Technology.

- Element Materials Technology is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Materials Technology facility is a registered (22831) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

FCC ID: BCGA2899 IC: 579C-A2899	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270066-26-R3.BCG	Test Dates: 11/29/2023 - 04/05/24	EUT Type: Tablet Device	Page 5 of 567

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID: BCGA2899** and **IC: 579C-A2899**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter while operating in the 6GHz band.

Test Device Serial No.: M6NM4JFC3F, Q4FQVTWRL2, CWF7TCY9J3, DLXH09000190000DHFV, DJY7WLOW1Y

2.2 Device Capabilities

This device contains the following capabilities:

850/1700/1900 WCDMA/HSPA, Multi-band LTE, 5G NR (FR1), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, 802.11a/ax WIFI 6E, Bluetooth (1x, EDR, LE1M, LE2M, HDR4, HDR8), NB UNII (1x, HDR4, HDR8), 802.15.4, WPT

This device supports BT Beamforming

Standard Power (SP) mode is supported for U-NII Bands 5 and 7. Lower Power Indoor (LPI) mode is supported for U-NII Bands 5, 6, 7, 8. Throughout the report, data of Standard Power mode is denoted as SP while data of Lower Power Indoor mode is denoted as LPI.

Band 5		Band 6		Band 7		Band 8	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
1	5955	97	6435	117	6535	189	6895
:	:	:	:	:	:	:	:
45	6175	105	6475	149	6695	209	6995
:	:	:	:	:	:	:	:
93	6415	113	6515	185	6875	229	7095

Table 2-1. 802.11a / 802.11ax (20MHz) Frequency / Channel Operations

Band 5		Band 6		Band 7		Band 8	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
3	5965	99	6445	123	6565	187	6885
:	:	:	:	:	:	:	:
43	6165	107	6485	155	6725	211	7005
:	:	:	:	:	:	:	:
91	6405	115	6525	179	6845	227	7085

Table 2-2. 802.11ax (40MHz BW) Frequency / Channel Operations

FCC ID: BCGA2899 IC: 579C-A2899	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270066-26-R3.BCG	Test Dates: 11/29/2023 - 04/05/24	EUT Type: Tablet Device	Page 6 of 567

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Band 5		Band 6		Band 7		Band 8	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
7	5985	103	6465	119	6545	199	6945
:	:			:	:	:	:
39	6145			151	6705	215	7025
:	:			:	:		
87	6385			183	6865		

Table 2-3. 802.11ax (80MHz BW) Frequency / Channel Operations

Band 5		Band 6		Band 7		Band 8	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
15	6025	111	6505	143	6665	207	6985
:	:			:	:		
47	6185			175	6825		
:	:						
79	6345						

Table 2-4. 802.11ax (160MHz BW) Frequency / Channel Operations

Notes:

- 6GHz NII operation is possible in 20MHz, 40MHz, 80MHz and 160MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) KDB 789033 D02 v02r01 and ANSI C63.10-2013. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Measured Duty Cycles						
802.11 Mode/Band		Duty Cycle [%]				
		Antenna 5T	Antenna 3b	Antenna 1b	CDD/SDM (Primary)	CDD/SDM (Diversity)
6GHz	a (Low Rate)	97.10	97.72	97.72	-	-
	a (Mid Rate)	95.17	95.72	95.72	-	-
	a (High Rate)	94.25	91.41	91.83	-	-
	ax(SU) (HE20 Low Rate)	97.23	95.94	95.94	96.16	95.94
	ax(SU) (HE20 Mid Rate)	95.57	93.33	93.11	93.33	92.90
	ax(SU) (HE20 High Rate)	92.96	87.50	86.90	87.30	86.30
	ax(SU) (HE40 Low Rate)	97.86	95.72	95.50	95.94	95.50
	ax(SU) (HE40 Mid Rate)	95.39	93.11	92.90	92.68	92.90
	ax(SU) (HE40 High Rate)	93.41	86.30	86.70	86.30	86.30
	ax(SU) (HE80 Low Rate)	97.03	95.50	95.50	95.28	95.94
	ax(SU) (HE80 Mid Rate)	95.43	92.47	92.90	92.68	92.68
	ax(SU) (HE80 High Rate)	91.52	85.90	86.30	86.10	85.90
	ax(SU) (HE160 Low Rate)	96.63	93.76	93.97	93.97	94.19
	ax(SU) (HE160 Mid Rate)	93.76	90.78	90.78	90.57	89.74
	ax(SU) (HE160 High Rate)	87.96	82.99	83.75	82.79	83.37

Table 2-5. Measured Duty Cycles

FCC ID: BCGA2899 IC: 579C-A2899	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270066-26-R3.BCG	Test Dates: 11/29/2023 - 04/05/24	EUT Type: Tablet Device	Page 7 of 567

V 10.5 12/15/2021

2. The device employs MIMO technology. Below are the possible configurations.

WIFI Configuration		SISO			Primary						Diversity					
					SDM		CDD		STBC		SDM		CDD		STBC	
		Antenna 5T	Antenna 3b	Antenna 1b	Antenna 5T	Antenna 3b	Antenna 5T	Antenna 3b	Antenna 5T	Antenna 3b	Antenna 5T	Antenna 1b	Antenna 5T	Antenna 1b	Antenna 5T	Antenna 1b
6GHz	11a	✓	✓	✓	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗
	11ax(SU) (20MHz)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	11ax(SU) (40MHz)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	11ax(SU) (80MHz)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	11ax(SU) (160MHz)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

Table 2-6. WIFI Configurations

✓ = Support ; ✗ = NOT Support

SISO = Single Input Single Output

SDM = Spatial Diversity Multiplexing – MIMO function

CDD = Cyclic Delay Diversity - 2Tx Function

STBC = Space-Time Block Coding – 2Tx Function

Data Rate(s) Tested: 6, 9, 12, 18, 24, 36, 48, 54Mbps (802.11a)

8/8.6, 16/17.2, 24/25.8, 33/34.4, 49/51.6, 65/68.8, 73/77.4, 81/86.0, 98/103.2, 108/114.7, 122/129.0, 135/143.4 (ax – 20MHz)
 16/17.2, 33/34.4, 49/51.6, 65/68.8, 98/103.2, 130/137.6, 146/154.9, 163/172.1, 195/206.5, 217/229.4, 244/258.1, 271/286.8 (ax – 40MHz BW)
 34/36.0, 68/72.1, 102/108.1, 136/144.1, 204/216.2, 272/288.2, 306/324.4, 340/360.3, 408/432.4, 453/480.4, 510/540.4, 567/600.5 (ax – 80MHz BW)
 68.1/72.1, 136.1/144.1, 204.2/216.2, 272.2/288.2, 408.3/432.4, 544.4/576.5, 612.5/648.5, 680.6/720.6, 816.7/864.7, 907.4/960.8, 1020.8/1080.9, 1134.3/1201 (ax – 160MHz BW)
 16.3/17.2, 32.5/34.4, 48.8/51.6, 65/68.8, 97.5/103.2, 130/137.6, 146.3/154.9, 162.5/172.1, 195/206.5, 216.7/229.4, 243.8/258.1, 270.8/286.8 (MIMO ax – 20MHz)
 32.5/34.4, 65/68.8, 97.5/103.2, 130/137.6, 195/206.5, 260/275.3, 292.5/309.7, 325/344.1, 390/412.9, 433.3/458.8, 487.5/516.2, 541.7/573.5 (MIMO ax – 40MHz BW)
 68.1/72.1, 136.1/144.1, 204.2/216.2, 272.2/288.2, 408.3/432.4, 544.4/576.5, 612.5/648.5, 680.6/720.6, 816.7/864.7, 907.4/960.8, 1020.8/1080.9, 1134.3/1201 (MIMO ax – 80MHz BW)
 136.1/144.1, 272.2/288.2, 408.3/432.4, 544.4/576.5, 816.7/864.7, 1088.9/1152.9, 1225/1297.1, 1361.1/1441.2, 1633.3/1729.4, 1814.8/1921.6, 2041.7/2161.8, 2268.5/2402 (MIMO ax – 160MHz BW)

FCC ID: BCGA2899 IC: 579C-A2899	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270066-26-R3.BCG	Test Dates: 11/29/2023 - 04/05/24	EUT Type: Tablet Device	Page 8 of 567

V 10.5 12/15/2021

3. This device supports simultaneous transmission operations, which allows for multiple transmitters to transmit simultaneously on the same antenna. The table below shows all configurations possible.

Antenna	Simultaneous Tx Config	Wifi 2GHz	Bluetooth	Thread	Wifi 5GHz	Wifi 6GHz	NB UNII	LTE/FR1 NR	LTE/FR1 NR
		802.11 b/g/n/ax	BDR, EDR, HDR4/8, LE1/2M	802.15.4	802.11 a/n/ac/ax	802.11 a/ax	BDR, HDR4/8	MB/HB	UHB
3b	Config 1	X	X	X	✓	X	X	✓	X
3b	Config 2	X	X	X	X	✓	X	✓	X
3b	Config 3	X	X	X	X	X	✓	✓	X
3a	Config 4	✓	X	X	X	X	X	X	✓
3a	Config 5	X	✓	X	X	X	X	X	✓
3a	Config 6	X	X	✓	X	X	X	X	✓
1a	Config 7	✓	X	X	X	X	X	X	✓
1a	Config 8	X	✓	X	X	X	X	X	✓
1a	Config 9	X	X	✓	X	X	X	X	✓
1b	Config 10	X	X	X	✓	X	X	✓	X
1b	Config 11	X	X	X	X	✓	X	✓	X
1b	Config 12	X	X	X	X	X	✓	✓	X

Table 2-7. Simultaneous Transmission Configurations

✓ = Support; ✕ = Not Support

4. All the above simultaneous transmission configurations have been tested and the worst-case configuration was found to be Config 8 and reported in RF Bluetooth and RF Part 96 test reports.
5. Specific 2.4GHz Wi-Fi antenna that can only transmit simultaneously with 2.4GHz Bluetooth antenna is listed in the SAR test report. For BT (2.4GHz) in connected mode and Wi-Fi (2.4GHz) - Wi-Fi max power will not exceed minimum of (13.5dBm, SAR max cap, Reg max cap) power. For BT (2.4GHz) in disconnected mode and Wi-Fi (2.4GHz) - BT will be using iPA only and Wi-Fi max power will not exceed minimum of (SAR max cap, Reg max cap) power. Bluetooth can simultaneously transmit with IEEE 802.11a/n/ac/ax 5/6 GHz on separate antenna.

FCC ID: BCGA2899 IC: 579C-A2899	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270066-26-R3.BCG	Test Dates: 11/29/2023 - 04/05/24	EUT Type: Tablet Device	Page 9 of 567

V 10.5 12/15/2021

2.3 Antenna Description

Following antenna gains were provided by the manufacturer.

UNII Band	Tx Frequency (MHz)	Highest Antenna Gain			Lowest Antenna Gain		
		Antenna 5T	Antenna 3b	Antenna 1b	Antenna 5T	Antenna 3b	Antenna 1b
5	5955-6415	3.4	-0.1	0.1	2.7	-2.1	-1.4
6	6435-6515	3.7	-1.7	0.1	3.7	-1.7	0.1
7	6535-6875	4.8	-0.7	-0.9	4.3	-3.3	-2.2
8	6895-7115	5.2	-1.6	-0.7	4.7	-2.4	-3.2

Table 2-8. Antenna Gain

2.4 Test Support Equipment

1	Apple MacBook Pro	Model:	A2141	S/N:	C02H604EQ05D
	w/AC/DC Adapter	Model:	A2166	S/N:	C4H042705ZNP00WA6
2	Apple USB-C Cable	Model:	Spartan	S/N:	GXK1336018XKTR024
3	USB-C Cable	Model:	A246C	S/N:	DWH80115BK826GV19
	w/ AC Adapter	Model:	A2305	S/N:	C4H95160004PF4F4V
4	Apple Pencil	Model:	A2538	S/N:	KJ26TCFXJW
5	DC Power Supply	Model:	KPS3010D	S/N:	N/A
6	Netgear AP	Model:	RAXE500	S/N:	6JX215GA10A5
7	Broadcom AP	Model:	N/A	S/N:	N/A

Table 2-9. Test Support Equipment List

FCC ID: BCGA2899 IC: 579C-A2899		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270066-26-R3.BCG	Test Dates: 11/29/2023 - 04/05/24	EUT Type: Tablet Device	Page 10 of 567

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.10-2013, KDB 789033 D02 v02r01 and KDB 987594 D02 v02r01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, 7.5 and 7.6 for antenna port conducted emissions test setups.

There are two vendors of the WiFi/Bluetooth radio modules, variant 1 and variant 2. Both radio modules have the same mechanical outline, same on-board antenna matching circuit, identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances. The worst case configuration was found between the two variants. The EUT was also investigated with and without charger.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power and the worst case channel.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

For AC line conducted and radiated test below 1GHz, following configuration were investigated and EUT powered by AC/DC was the worst case.

- EUT powered by AC/DC adaptor via USB-C cable with wire charger
- EUT powered by host PC via USB-C cable with wire charger

For 802.11ax-RU test results, see separate UNII 6E OFDMA report, 1C2311270066-27.BCG.

The data rates have been classified into three different groups; low data rate, middle data rate, and high data rate. All three groups of data rate have been investigated and only the worst case data rate per group is reported. The worst case data rate for each group per mode are as follows:

- 802.11a:
 - Low Data Rate: 12Mbps
 - Mid Data Rate: 24Mbps
 - High Data Rate: 54Mbps
- 802.11ax(SU) HE20/HE40/HE80/HE160
 - Low Data Rate: MCS2
 - Mid Data Rate: MCS4
 - High Data Rate: MCS11

2.6 Software and Firmware

The test was conducted with firmware 21E8197 installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: BCGA2899 IC: 579C-A2899	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270066-26-R3.BCG	Test Dates: 11/29/2023 - 04/05/24	EUT Type: Tablet Device	Page 11 of 567

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 789033 D02 v02r01 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-6. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is EPCOS 2X60A Power Line Filter (100dB Attenuation, 14kHz-18GHz) and the two EPCOs 2X48A filters (100dB Minimum Insertion Loss, 14kHz - 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.9. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 10.50.40.

FCC ID: BCGA2899 IC: 579C-A2899		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270066-26-R3.BCG	Test Dates: 11/29/2023 - 04/05/24	EUT Type: Tablet Device	Page 12 of 567

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

Per KDB 414788, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was used while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: BCGA2899 IC: 579C-A2899	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270066-26-R3.BCG	Test Dates: 11/29/2023 - 04/05/24	EUT Type: Tablet Device	Page 13 of 567

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: BCGA2899 IC: 579C-A2899	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270066-26-R3.BCG	Test Dates: 11/29/2023 - 04/05/24	EUT Type: Tablet Device	Page 14 of 567

V 10.5 12/15/2021

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	2.07
Line Conducted Disturbance	1.91
Radiated Disturbance (<30MHz)	4.12
Radiated Disturbance (30MHz - 1GHz)	4.85
Radiated Disturbance (1 - 18GHz)	5.08
Radiated Disturbance (>18GHz)	4.59

FCC ID: BCGA2899 IC: 579C-A2899		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270066-26-R3.BCG	Test Dates: 11/29/2023 - 04/05/24	EUT Type: Tablet Device	Page 15 of 567

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	6/21/2023	Annual	6/21/2024	MY49430244
Anritsu	ML2496A	Power Meter	4/4/2023	Annual	4/4/2024	1840005
Anritsu	MA2411B	Pulse Power Sensor	8/22/2023	Annual	8/22/2024	1726262
Anritsu	MA2411B	Pulse Power Sensor	4/5/2023	Annual	4/5/2024	1726261
ETS-Lindgren	3117	Double Ridged Guide Antenna (1-18 GHz)	3/30/2023	Annual	3/30/2024	00218555
Keysight Technology	N9040B	UXA Signal Analyzer	3/10/2023	Annual	3/10/2024	MY57212015
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz - 18GHz)	8/31/2023	Annual	8/31/2024	100052
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	5/11/2023	Annual	5/11/2024	101619
Rohde & Schwarz	ESW44	EMI Test Receiver	6/6/2023	Annual	6/6/2024	101668
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	6/22/2023	Annual	6/22/2024	102356
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	6/2/2023	Annual	6/2/2024	100050
Rohde & Schwarz	HFH2-Z2	Loop Antenna	5/1/2023	Annual	5/1/2024	100519
Rohde & Schwarz	ENV216	Two-Line V-Network	6/8/2023	Annual	6/8/2024	192052
Schwarzbeck	VULB 9162	Bilog Antenna (30MHz - 6GHz)	4/17/2023	Annual	4/17/2024	00304

Table 6-1. Test Equipment List

Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: BCGA2899 IC: 579C-A2899	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270066-26-R3.BCG	Test Dates: 11/29/2023 - 04/05/24	EUT Type: Tablet Device	Page 16 of 567

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.0 TEST RESULTS

7.1 Summary

Company Name: Apple Inc.
 FCC ID: BCGA2899
 IC: 579C-A2899
 FCC Classification: 15E 6GHz Low Power Dual Client (6CD)

FCC Part Section(s) / KDB Reference	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049, 15.407(a)(10)	RSS Gen [6.7], RSS-248 [4.4]	Occupied Bandwidth/ 26dB Bandwidth	99% of the occupied bandwidth of any channel must be contained within each of its respective U-NII sub bands < 320MHz (5.925 - 7.125GHz)	CONDUCTED	PASS	Section 7.2
15.407(a)(8)	RSS-248 [4.5.3]	Maximum Power Spectral Density	< -1dBm/MHz e.i.r.p. for Low Power Indoor		PASS	Section 7.4
15.407(a)(7)	RSS-248 [4.5.5]		< 17dBm/MHz e.i.r.p. for Standard Power		PASS	Section 7.4
15.407(a)(8)	RSS-248 [4.5.3]	Maximum Radiated Output Power	< 24dBm over the frequency band of operation for Low Power Indoor		PASS	Section 7.3 Error! Reference source not found.
15.407(a)(7)	RSS-248 [4.5.5]		< 30dBm over the frequency band of operation for Standard Power		PASS	Section 7.3 Error! Reference source not found.
15.407(b)(7)	RSS-248 [4.7.2]	In-Band Emissions	EUT must meet the limits detailed in 15.407(b)(7) and RSS-248 [4.7.2]b)		PASS	Section 7.5
15.407(d)(6)	RSS-248 [4.8]	Contention Based Protocol	EUT must detect AWGN signal with 90% (or better) certainty		PASS	Section 7.6
15.407(a)(7)	RSS-248 [4.5.4]	Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point	EUT maintains its power level at least 6 dB lower than that of the standard-power access point		PASS	See UNII 6E OFDMA Test Report (1C231127 0066-27.BCG)
987594 D02 v02r01	N/A	Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP	EUT maximum power level shall not exceed 30dBm EIRP when connected to Standard Power AP, and 24dBm EIRP when connected to Low Power Indoor AP		PASS	
15.407(b)(6)	RSS-248 [4.7.2]	Undesirable Emissions	< -27dBm/MHz e.i.r.p. outside of the 5.925 – 7.125GHz band	RADIATED	PASS	Section 7.7
15.205, 15.209	RSS-248 [4.7]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		PASS	Section 7.7, 7.8
15.407(b)(8)	RSS-248 [4.7]	AC Conducted Emissions (150kHz – 30MHz)	< FCC 15.207 & RSS-Gen [8.8] limits	LINE CONDUCTED	PASS	Section 7.9

Table 7-1. Summary of Test Results

FCC ID: BCGA2899 IC: 579C-A2899	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270066-26-R3.BCG	Test Dates: 11/29/2023 - 04/05/24	EUT Type: Tablet Device	Page 17 of 567

V 10.5 12/15/2021

Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element EMC Software Tool v1.2.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "Chamber Automation," Version 3.0.0.
- 6) All radiated measurements were tested at the highest supported power setting per band.

FCC ID: BCGA2899 IC: 579C-A2899	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270066-26-R3.BCG	Test Dates: 11/29/2023 - 04/05/24	EUT Type: Tablet Device	Page 18 of 567

V 10.5 12/15/2021

7.2 26dB & 99% Bandwidth Measurement – 802.11a/ax(SU)

§2.1049; §15.407; RSS-Gen [6.7]

Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

Test Procedure Used

ANSI C63.10-2013 – Section 12.4

KDB 789033 D02 v02r01 – Section C

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = max hold

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

1. All antenna configurations, power modes, and data rates were investigated and only the worst case are reported.
2. All The data rates have been classified into three different groups; Low Data Rate, Middle Data Rate, and High Data Rate. All three data rate groups of data rate have been investigated and only the worst case data rate per group is reported.
3. Low, mid, and high channels were tested and tabular data has been reported. Only mid channel bandwidth plots have been reported.

FCC ID: BCGA2899 IC: 579C-A2899			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270066-26-R3.BCG	Test Dates: 11/29/2023 - 04/05/24	EUT Type: Tablet Device		Page 19 of 567

V 10.5 12/15/2021

7.2.1 Antenna 5T 26dB & 99% Bandwidth Measurements

	Frequency [MHz]	Channel	802.11 MODE	Data Rate [Mbps]	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]	Maximum Bandwidth Limit [MHz]	Pass / Fail
Band 5	5955	1	a	12	16.71	20.83	320	Pass
	6175	45	a	12	16.71	20.87	320	Pass
	6415	93	a	12	16.67	20.80	320	Pass
	5955	1	ax (20MHz)	24/25.8 (MCS2)	19.03	21.43	320	Pass
	6175	45	ax (20MHz)	24/25.8 (MCS2)	19.04	21.07	320	Pass
	6415	93	ax (20MHz)	24/25.8 (MCS2)	19.03	21.12	320	Pass
	5965	3	ax (40MHz)	49/51.6 (MCS2)	37.97	41.54	320	Pass
	6165	43	ax (40MHz)	49/51.6 (MCS2)	37.93	41.48	320	Pass
	6405	91	ax (40MHz)	49/51.6 (MCS2)	37.94	41.43	320	Pass
	5985	7	ax (80MHz)	102/108.1 (MCS2)	77.24	82.07	320	Pass
	6145	39	ax (80MHz)	102/108.1 (MCS2)	77.21	82.14	320	Pass
	6385	87	ax (80MHz)	102/108.1 (MCS2)	77.22	81.87	320	Pass
	6025	15	ax (160MHz)	183.8/216.2 (MCS2)	156.28	165.10	320	Pass
	6185	47	ax (160MHz)	183.8/216.2 (MCS2)	156.25	165.10	320	Pass
Band 6	6345	79	ax (160MHz)	183.8/216.2 (MCS2)	156.25	165.30	320	Pass
	6435	97	a	12	16.72	20.81	320	Pass
	6475	105	a	12	16.71	20.84	320	Pass
	6515	113	a	12	16.73	20.90	320	Pass
	6345	97	ax (20MHz)	24/25.8 (MCS2)	19.01	21.28	320	Pass
	6475	105	ax (20MHz)	24/25.8 (MCS2)	19.06	21.25	320	Pass
	6515	113	ax (20MHz)	24/25.8 (MCS2)	19.05	21.07	320	Pass
	6445	99	ax (40MHz)	49/51.6 (MCS2)	37.95	41.57	320	Pass
	6485	107	ax (40MHz)	49/51.6 (MCS2)	37.97	41.66	320	Pass
	6525	115	ax (40MHz)	49/51.6 (MCS2)	37.97	41.68	320	Pass
Band 7	6465	103	ax (80MHz)	102/108.1 (MCS2)	77.17	81.92	320	Pass
	6505	111	ax (160MHz)	183.8/216.2 (MCS2)	156.21	164.60	320	Pass
	6535	117	a	12	16.73	20.86	320	Pass
	6695	149	a	12	16.70	20.85	320	Pass
	6875	185	a	12	16.73	20.87	320	Pass
	6535	117	ax (20MHz)	24/25.8 (MCS2)	19.04	21.35	320	Pass
	6695	149	ax (20MHz)	24/25.8 (MCS2)	19.02	21.12	320	Pass
	6875	185	ax (20MHz)	24/25.8 (MCS2)	19.02	21.29	320	Pass
	6565	123	ax (40MHz)	49/51.6 (MCS2)	37.95	41.69	320	Pass
	6725	155	ax (40MHz)	49/51.6 (MCS2)	37.95	41.51	320	Pass
	6885	179	ax (40MHz)	49/51.6 (MCS2)	37.97	41.44	320	Pass
	6545	119	ax (80MHz)	102/108.1 (MCS2)	77.20	81.86	320	Pass
Band 8	6705	151	ax (80MHz)	102/108.1 (MCS2)	77.18	82.08	320	Pass
	6865	183	ax (80MHz)	102/108.1 (MCS2)	77.13	81.36	320	Pass
	6665	143	ax (160MHz)	183.8/216.2 (MCS2)	156.42	165.00	320	Pass
	6825	175	ax (160MHz)	183.8/216.2 (MCS2)	156.37	165.10	320	Pass
	6895	189	a	12	16.74	20.85	320	Pass
	6995	209	a	12	16.73	20.88	320	Pass
	7115	233	a	12	16.70	20.87	320	Pass
	6895	189	ax (20MHz)	24/25.8 (MCS2)	19.02	21.32	320	Pass
	6995	209	ax (20MHz)	24/25.8 (MCS2)	19.02	21.34	320	Pass
	7115	233	ax (20MHz)	24/25.8 (MCS2)	19.05	21.21	320	Pass
	6925	187	ax (40MHz)	49/51.6 (MCS2)	37.91	41.66	320	Pass
	7005	211	ax (40MHz)	49/51.6 (MCS2)	37.95	41.27	320	Pass
Band 8	7085	227	ax (40MHz)	49/51.6 (MCS2)	37.90	41.47	320	Pass
	6945	199	ax (80MHz)	102/108.1 (MCS2)	77.16	81.71	320	Pass
	7025	215	ax (80MHz)	102/108.1 (MCS2)	77.16	81.93	320	Pass
	6985	207	ax (160MHz)	183.8/216.2 (MCS2)	156.12	164.70	320	Pass

Table 7-2. Conducted Bandwidth Measurements Antenna 5T (Low Data Rate)

FCC ID: BCGA2899 IC: 579C-A2899	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270066-26-R3.BCG	Test Dates: 11/29/2023 - 04/05/24	EUT Type: Tablet Device	Page 20 of 567

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

	Frequency [MHz]	Channel	802.11 MODE	Data Rate [MHz]	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]	Maximum Bandwidth Limit [MHz]	Pass / Fail
Band 5	5955	1	a	24	16.67	20.83	320	Pass
	6175	45	a	24	16.67	20.86	320	Pass
	6415	93	a	24	16.68	20.77	320	Pass
	5955	1	ax (20MHz)	49/51.6 (MCS4)	19.04	21.28	320	Pass
	6175	45	ax (20MHz)	49/51.6 (MCS4)	19.01	21.30	320	Pass
	6415	93	ax (20MHz)	49/51.6 (MCS4)	19.03	21.29	320	Pass
	5965	3	ax (40MHz)	98/103.2 (MCS4)	37.93	41.68	320	Pass
	6165	43	ax (40MHz)	98/103.2 (MCS4)	37.92	41.46	320	Pass
	6405	91	ax (40MHz)	98/103.2 (MCS4)	37.90	41.44	320	Pass
	5985	7	ax (80MHz)	204/216.2 (MCS4)	77.11	81.52	320	Pass
	6145	39	ax (80MHz)	204/216.2 (MCS4)	77.12	81.96	320	Pass
	6385	87	ax (80MHz)	204/216.2 (MCS4)	77.21	81.87	320	Pass
	6025	15	ax (160MHz)	367.5/432.4 (MCS4)	156.32	164.90	320	Pass
Band 6	6185	47	ax (160MHz)	367.5/432.4 (MCS4)	156.13	164.70	320	Pass
	6345	79	ax (160MHz)	367.5/432.4 (MCS4)	156.40	164.90	320	Pass
	6435	97	a	24	16.68	20.86	320	Pass
	6475	105	a	24	16.68	20.84	320	Pass
	6515	113	a	24	16.67	20.79	320	Pass
	6345	97	ax (20MHz)	49/51.6 (MCS4)	19.02	21.12	320	Pass
	6475	105	ax (20MHz)	49/51.6 (MCS4)	19.04	21.05	320	Pass
	6515	113	ax (20MHz)	49/51.6 (MCS4)	19.04	20.92	320	Pass
	6445	99	ax (40MHz)	98/103.2 (MCS4)	37.96	41.36	320	Pass
	6485	107	ax (40MHz)	98/103.2 (MCS4)	37.94	41.34	320	Pass
	6525	115	ax (40MHz)	98/103.2 (MCS4)	37.93	41.42	320	Pass
	6465	103	ax (80MHz)	204/216.2 (MCS4)	77.22	82.00	320	Pass
	6505	111	ax (160MHz)	367.5/432.4 (MCS4)	156.27	165.40	320	Pass
Band 7	6535	117	a	24	16.68	20.85	320	Pass
	6695	149	a	24	16.67	20.80	320	Pass
	6875	185	a	24	16.67	20.84	320	Pass
	6535	117	ax (20MHz)	49/51.6 (MCS4)	19.03	21.16	320	Pass
	6695	149	ax (20MHz)	49/51.6 (MCS4)	19.03	21.27	320	Pass
	6875	185	ax (20MHz)	49/51.6 (MCS4)	19.02	21.12	320	Pass
	6565	123	ax (40MHz)	98/103.2 (MCS4)	37.91	41.48	320	Pass
	6725	155	ax (40MHz)	98/103.2 (MCS4)	37.93	41.48	320	Pass
	6885	179	ax (40MHz)	98/103.2 (MCS4)	37.93	41.54	320	Pass
	6545	119	ax (80MHz)	204/216.2 (MCS4)	77.22	81.73	320	Pass
	6705	151	ax (80MHz)	204/216.2 (MCS4)	77.15	82.02	320	Pass
	6865	183	ax (80MHz)	204/216.2 (MCS4)	77.19	81.71	320	Pass
	6665	143	ax (160MHz)	367.5/432.4 (MCS4)	156.20	164.30	320	Pass
Band 8	6825	175	ax (160MHz)	367.5/432.4 (MCS4)	155.93	165.20	320	Pass
	6895	189	a	24	16.68	20.85	320	Pass
	6995	209	a	24	16.66	20.85	320	Pass
	7115	233	a	24	16.68	20.80	320	Pass
	6895	189	ax (20MHz)	49/51.6 (MCS4)	19.02	21.28	320	Pass
	6995	209	ax (20MHz)	49/51.6 (MCS4)	19.02	21.36	320	Pass
	7115	233	ax (20MHz)	49/51.6 (MCS4)	19.04	21.26	320	Pass
	6925	187	ax (40MHz)	98/103.2 (MCS4)	37.92	41.28	320	Pass
	7005	211	ax (40MHz)	98/103.2 (MCS4)	37.94	41.35	320	Pass
	7085	227	ax (40MHz)	98/103.2 (MCS4)	37.95	41.55	320	Pass
	6945	199	ax (80MHz)	204/216.2 (MCS4)	77.13	81.68	320	Pass
	7025	215	ax (80MHz)	204/216.2 (MCS4)	77.08	81.57	320	Pass
	6985	207	ax (160MHz)	367.5/432.4 (MCS4)	156.08	164.60	320	Pass

Table 7-3. Conducted Bandwidth Measurements Antenna 5T (Mid Data Rate)

FCC ID: BCGA2899 IC: 579C-A2899	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270066-26-R3.BCG	Test Dates: 11/29/2023 - 04/05/24	EUT Type: Tablet Device	Page 21 of 567

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

	Frequency [MHz]	Channel	802.11 MODE	Data Rate [MHz]	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]	Maximum Bandwidth Limit [MHz]	Pass / Fail
Band 5	5955	1	a	54	16.65	20.72	320	Pass
	6175	45	a	54	16.65	20.67	320	Pass
	6415	93	a	54	16.65	20.62	320	Pass
	5955	1	ax (20MHz)	135/143.4 (MCS11)	19.04	21.27	320	Pass
	6175	45	ax (20MHz)	135/143.4 (MCS11)	19.02	21.24	320	Pass
	6415	93	ax (20MHz)	135/143.4 (MCS11)	19.04	21.28	320	Pass
	5965	3	ax (40MHz)	271/286.8 (MCS11)	37.87	41.37	320	Pass
	6165	43	ax (40MHz)	271/286.8 (MCS11)	37.94	41.15	320	Pass
	6405	91	ax (40MHz)	271/286.8 (MCS11)	37.90	41.36	320	Pass
	5985	7	ax (80MHz)	567/600.5 (MCS11)	77.29	81.67	320	Pass
	6145	39	ax (80MHz)	567/600.5 (MCS11)	77.21	81.94	320	Pass
	6385	87	ax (80MHz)	567/600.5 (MCS11)	77.16	82.06	320	Pass
	6025	15	ax (160MHz)	1020.8/1201 (MCS11)	156.29	164.90	320	Pass
Band 6	6185	47	ax (160MHz)	1020.8/1201 (MCS11)	155.93	165.10	320	Pass
	6345	79	ax (160MHz)	1020.8/1201 (MCS11)	156.05	164.70	320	Pass
	6435	97	a	54	16.65	20.67	320	Pass
	6475	105	a	54	16.65	20.69	320	Pass
	6515	113	a	54	16.66	20.75	320	Pass
	6345	97	ax (20MHz)	135/143.4 (MCS11)	19.05	21.23	320	Pass
	6475	105	ax (20MHz)	135/143.4 (MCS11)	19.07	21.15	320	Pass
	6515	113	ax (20MHz)	135/143.4 (MCS11)	19.05	21.35	320	Pass
	6445	99	ax (40MHz)	271/286.8 (MCS11)	37.89	41.28	320	Pass
	6485	107	ax (40MHz)	271/286.8 (MCS11)	37.93	41.26	320	Pass
	6525	115	ax (40MHz)	271/286.8 (MCS11)	37.96	41.35	320	Pass
	6465	103	ax (80MHz)	567/600.5 (MCS11)	77.13	81.85	320	Pass
	6505	111	ax (160MHz)	1020.8/1201 (MCS11)	156.03	164.90	320	Pass
Band 7	6535	117	a	54	16.66	20.71	320	Pass
	6695	149	a	54	16.65	20.68	320	Pass
	6875	185	a	54	16.65	20.65	320	Pass
	6535	117	ax (20MHz)	135/143.4 (MCS11)	19.05	21.05	320	Pass
	6695	149	ax (20MHz)	135/143.4 (MCS11)	19.06	21.05	320	Pass
	6875	185	ax (20MHz)	135/143.4 (MCS11)	19.03	21.29	320	Pass
	6565	123	ax (40MHz)	271/286.8 (MCS11)	37.88	41.26	320	Pass
	6725	155	ax (40MHz)	271/286.8 (MCS11)	37.90	41.23	320	Pass
	6885	179	ax (40MHz)	271/286.8 (MCS11)	37.91	41.30	320	Pass
	6545	119	ax (80MHz)	567/600.5 (MCS11)	77.11	81.26	320	Pass
	6705	151	ax (80MHz)	567/600.5 (MCS11)	77.14	81.51	320	Pass
	6865	183	ax (80MHz)	567/600.5 (MCS11)	77.01	81.73	320	Pass
	6665	143	ax (160MHz)	1020.8/1201 (MCS11)	156.03	165.10	320	Pass
Band 8	6825	175	ax (160MHz)	1020.8/1201 (MCS11)	156.02	165.40	320	Pass
	6895	189	a	54	16.65	20.71	320	Pass
	6995	209	a	54	16.65	20.69	320	Pass
	7115	233	a	54	16.64	20.68	320	Pass
	6895	189	ax (20MHz)	135/143.4 (MCS11)	19.02	21.26	320	Pass
	6995	209	ax (20MHz)	135/143.4 (MCS11)	19.03	21.16	320	Pass
	7115	233	ax (20MHz)	135/143.4 (MCS11)	19.05	21.20	320	Pass
	6925	187	ax (40MHz)	271/286.8 (MCS11)	37.93	41.43	320	Pass
	7005	211	ax (40MHz)	271/286.8 (MCS11)	37.96	41.16	320	Pass
	7085	227	ax (40MHz)	271/286.8 (MCS11)	37.91	41.36	320	Pass
	6945	199	ax (80MHz)	567/600.5 (MCS11)	77.15	81.70	320	Pass
	7025	215	ax (80MHz)	567/600.5 (MCS11)	77.20	81.84	320	Pass
	6985	207	ax (160MHz)	1020.8/1201 (MCS11)	156.07	164.60	320	Pass


Table 7-4. Conducted Bandwidth Measurements Antenna 5T (High Data Rate)

FCC ID: BCGA2899 IC: 579C-A2899	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270066-26-R3.BCG	Test Dates: 11/29/2023 - 04/05/24	EUT Type: Tablet Device	Page 22 of 567


V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


Low Data Rate

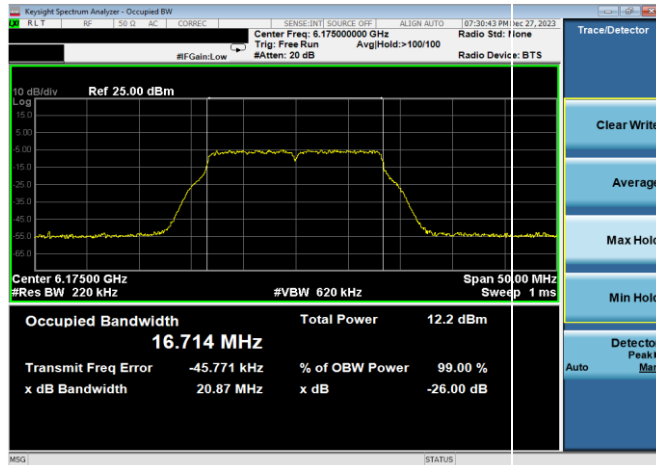


Plot 7-1. 26dB & 99% Bandwidth Plot Antenna 5T (20MHz 802.11a (UNII Band 5) – Ch. 45, 12Mbps)

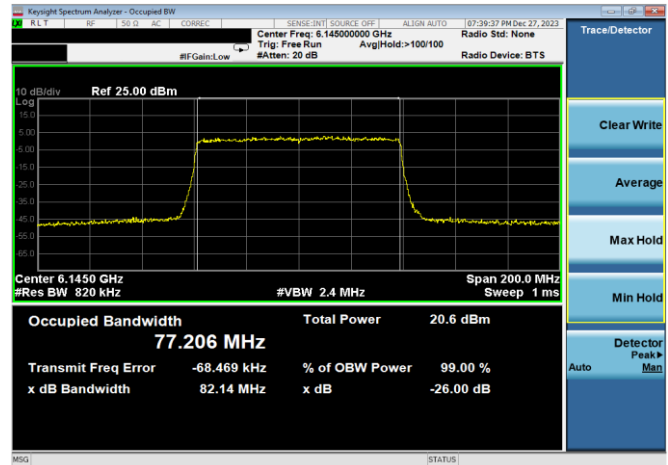


Plot 7-4. 26dB & 99% Bandwidth Plot Antenna 5T (80MHz 802.11ax (UNII Band 5) – Ch. 39, MCS2)

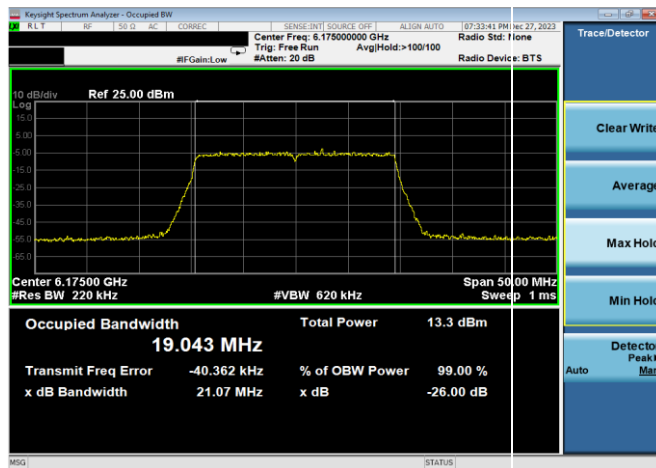


Plot 7-2. 26dB & 99% Bandwidth Plot Antenna 5T (20MHz 802.11ax (UNII Band 5) – Ch. 45, MCS2)

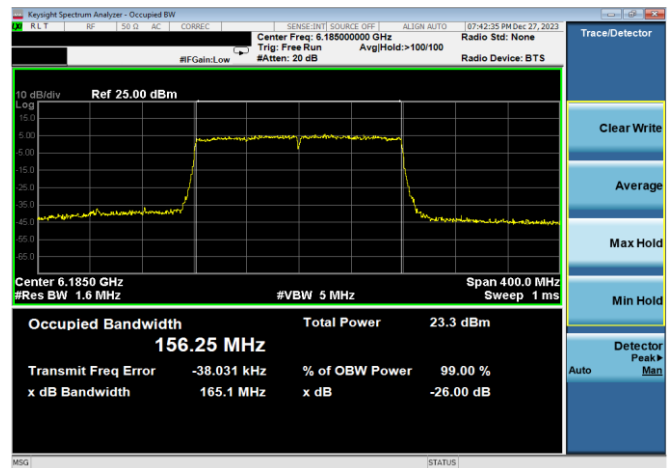

Plot 7-5. 26dB & 99% Bandwidth Plot Antenna 5T (160MHz 802.11ax (UNII Band 5) – Ch. 47, MCS2)

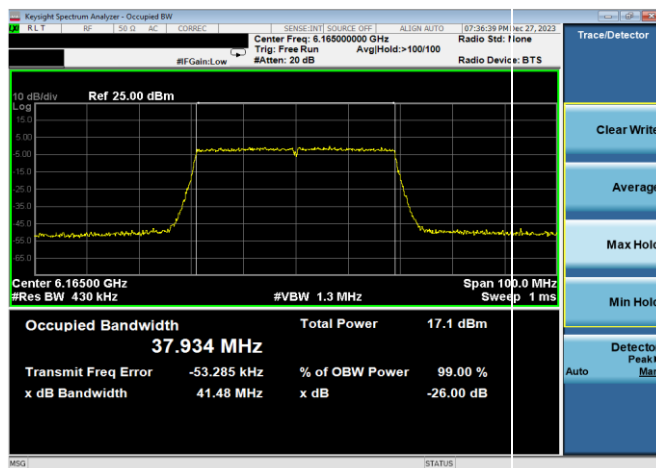

Plot 7-3. 26dB & 99% Bandwidth Plot Antenna 5T (40MHz 802.11ax (UNII Band 5) – Ch. 43, MCS2)

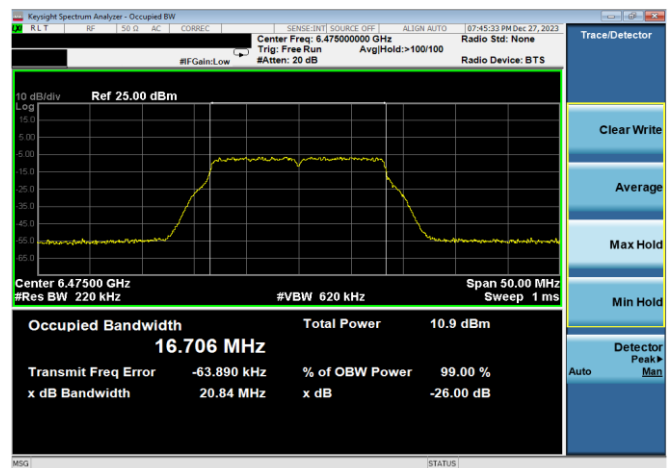


Plot 7-6. 26dB & 99% Bandwidth Plot Antenna 5T (20MHz 802.11a (UNII Band 6) – Ch. 105, 12Mbps)


FCC ID: BCGA2899 IC: 579C-A2899		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270066-26-R3.BCG	Test Dates: 11/29/2023 - 04/05/24	EUT Type: Tablet Device	Page 23 of 567

V 10.5 12/15/2021


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

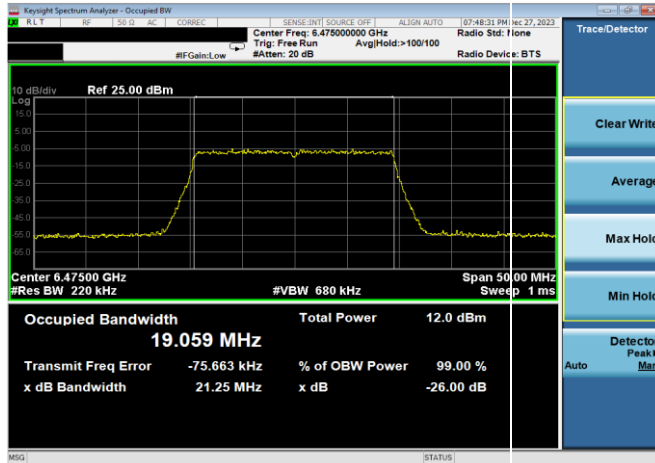


Plot 7-7. 26dB & 99% Bandwidth Plot Antenna 5T (20MHz 802.11ax (UNII Band 6) – Ch. 105, MCS2)

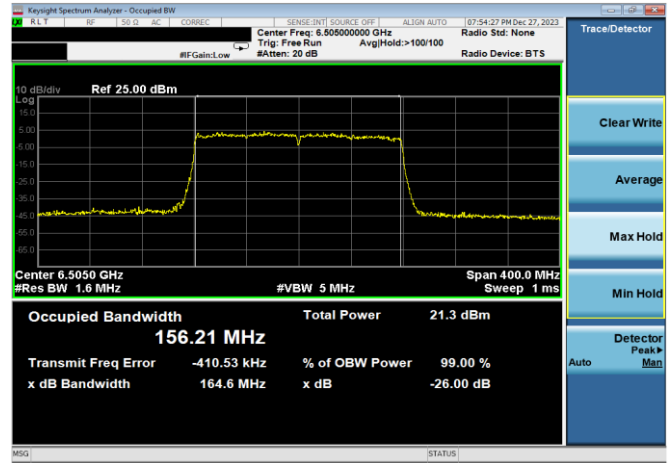


Plot 7-10. 26dB & 99% Bandwidth Plot Antenna 5T (160MHz 802.11ax (UNII Band 6) – Ch. 111, MCS2)

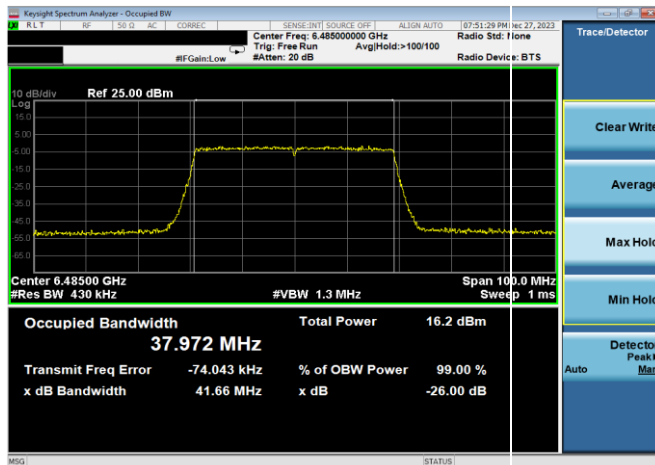


Plot 7-8. 26dB & 99% Bandwidth Plot Antenna 5T (40MHz 802.11ax (UNII Band 6) – Ch. 107, MCS2)

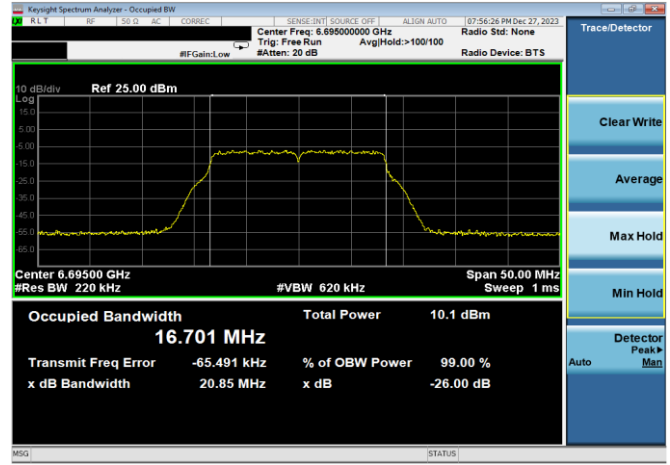

Plot 7-11. 26dB & 99% Bandwidth Plot Antenna 5T (20MHz 802.11a (UNII Band 7) – Ch. 149, 12Mbps)






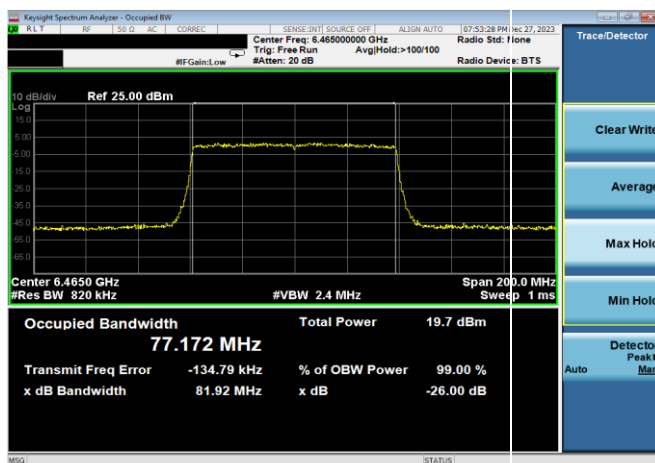


Plot 7-9. 26dB & 99% Bandwidth Plot Antenna 5T (80MHz 802.11ax (UNII Band 6) – Ch. 103, MCS2)

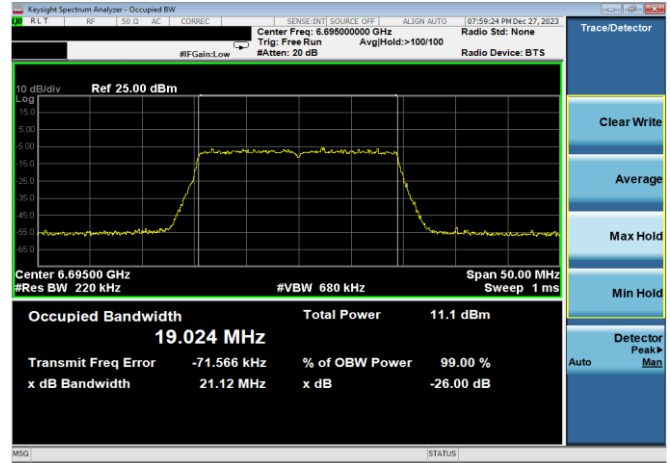

Plot 7-12. 26dB & 99% Bandwidth Plot Antenna 5T (20MHz 802.11ax (UNII Band 7) – Ch. 149, MCS2)


FCC ID: BCGA2899 IC: 579C-A2899		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270066-26-R3.BCG	Test Dates: 11/29/2023 - 04/05/24	EUT Type: Tablet Device	Page 24 of 567

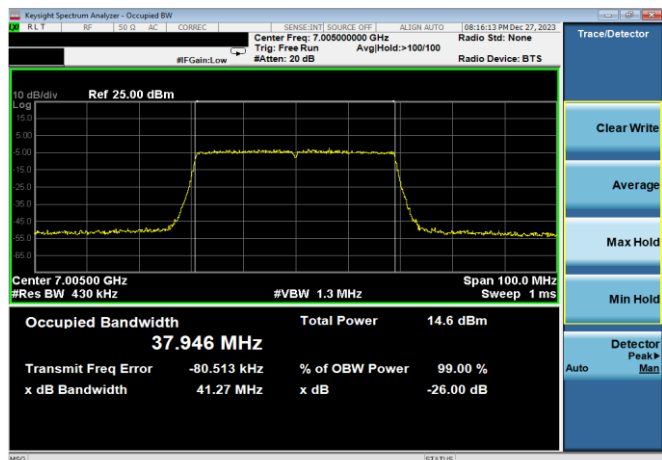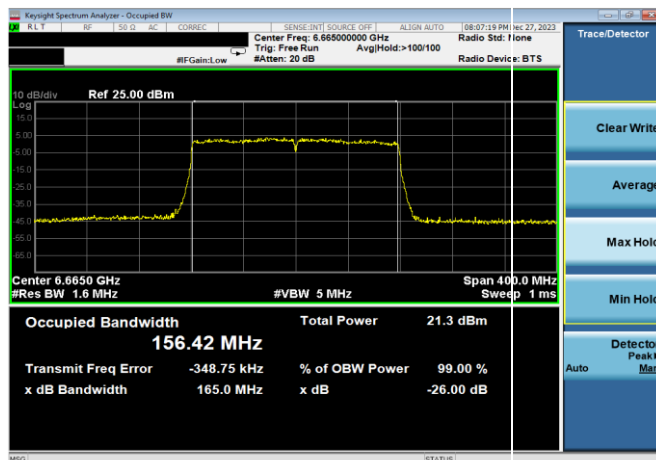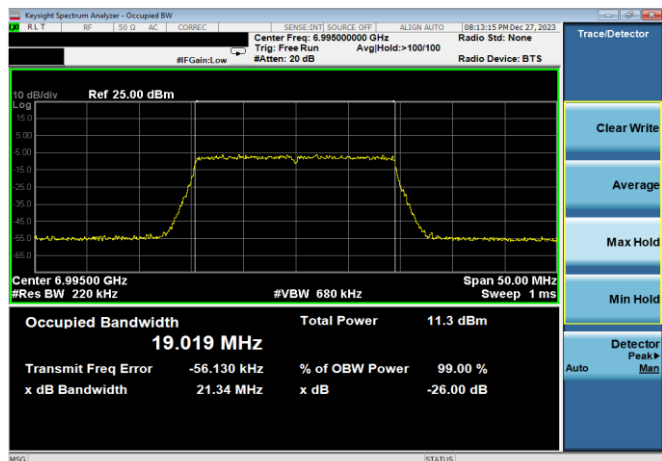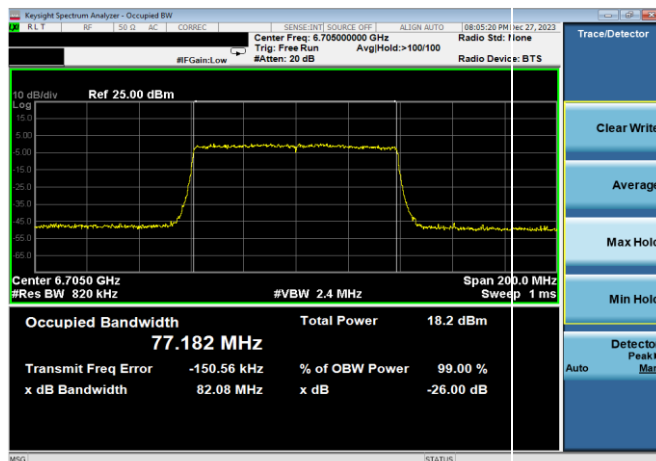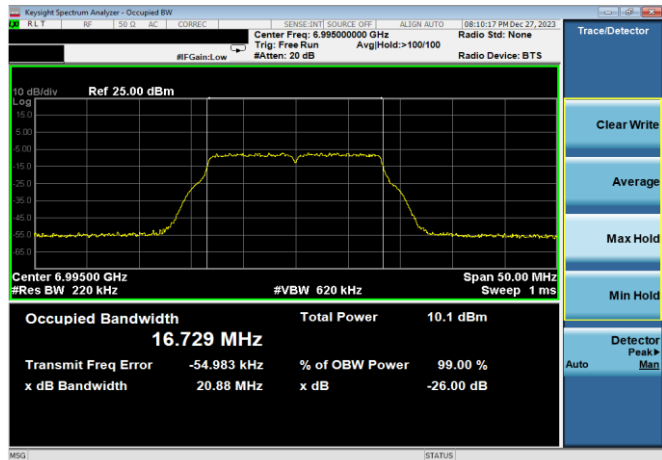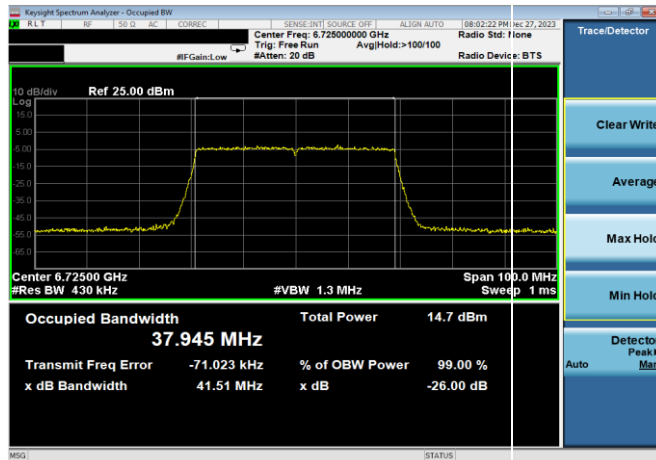


FCC ID: BCGA2899 IC: 579C-A2899		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270066-26-R3.BCG	Test Dates: 11/29/2023 - 04/05/24	EUT Type: Tablet Device	Page 25 of 567

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

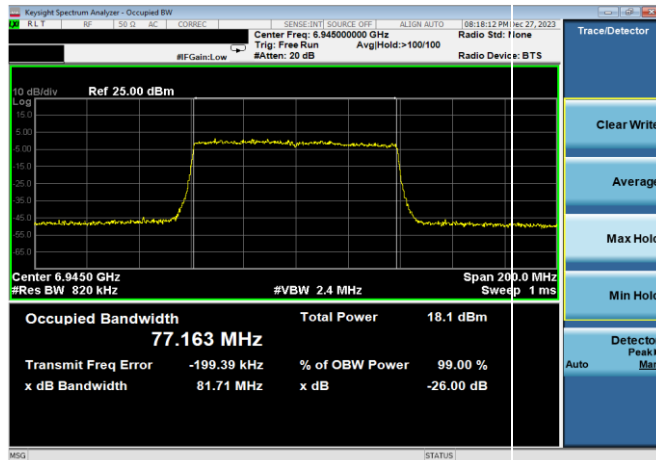

Plot 7-19. 26dB & 99% Bandwidth Plot Antenna 5T (80MHz 802.11ax (UNII Band 8) – Ch. 199, MCS2)

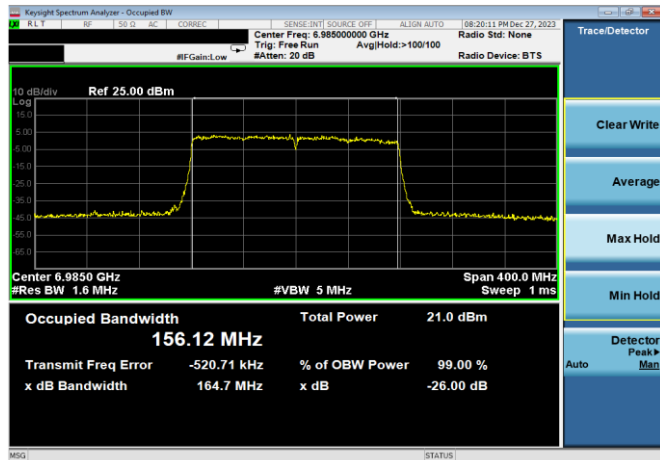


Plot 7-20. 26dB & 99% Bandwidth Plot Antenna 5T (160MHz 802.11ax (UNII Band 8) – Ch. 207, MCS2)

FCC ID: BCGA2899 IC: 579C-A2899	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270066-26-R3.BCG	Test Dates: 11/29/2023 - 04/05/24	EUT Type: Tablet Device	Page 26 of 567


V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


Mid Data Rate

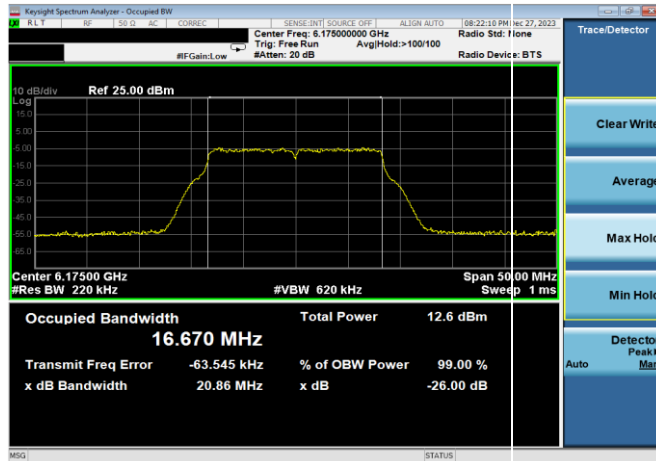


Plot 7-21. 26dB & 99% Bandwidth Plot Antenna 5T (20MHz 802.11a (UNII Band 5) – Ch. 45, 24Mbps)

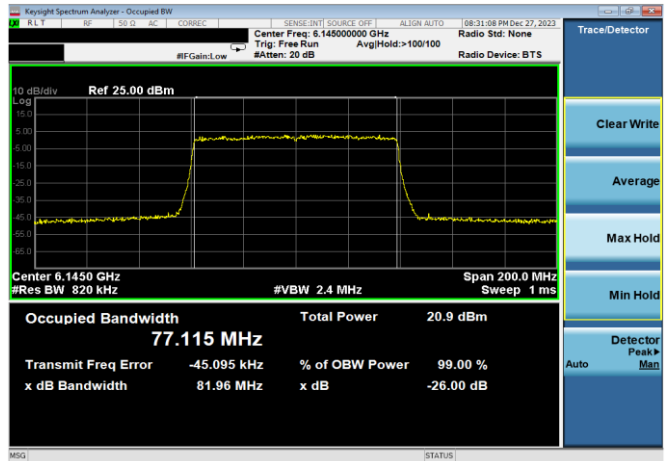


Plot 7-24. 26dB & 99% Bandwidth Plot Antenna 5T (80MHz 802.11ax (UNII Band 5) – Ch. 39, MCS4)

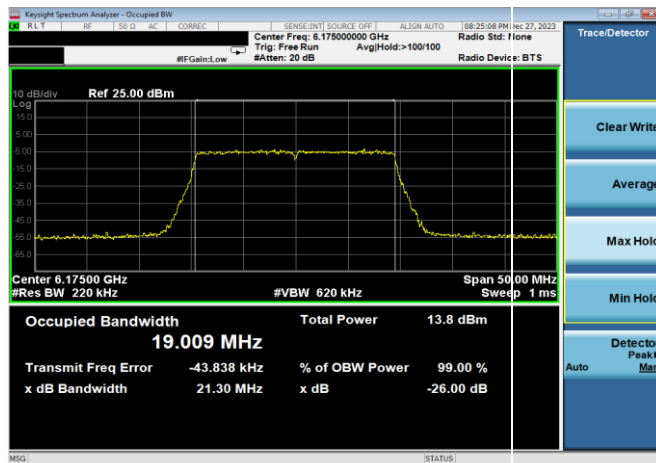


Plot 7-22. 26dB & 99% Bandwidth Plot Antenna 5T (20MHz 802.11ax (UNII Band 5) – Ch. 45, MCS4)

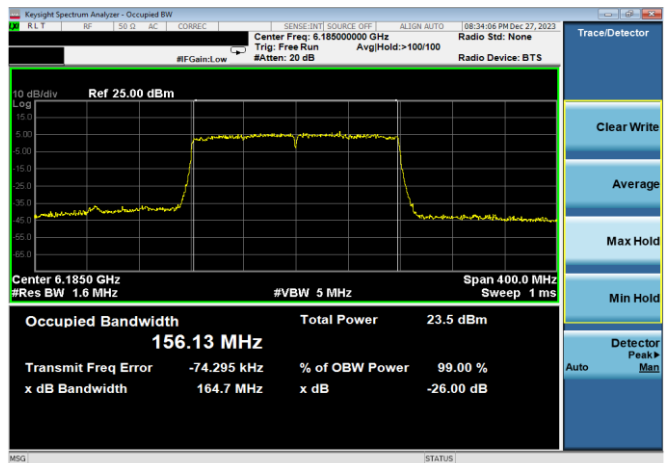

Plot 7-25. 26dB & 99% Bandwidth Plot Antenna 5T (160MHz 802.11ax (UNII Band 5) – Ch. 47, MCS4)

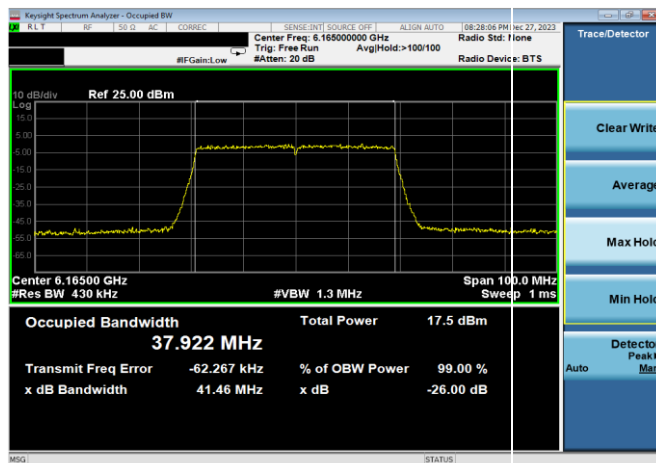

Plot 7-23. 26dB & 99% Bandwidth Plot Antenna 5T (40MHz 802.11ax (UNII Band 5) – Ch. 43, MCS4)

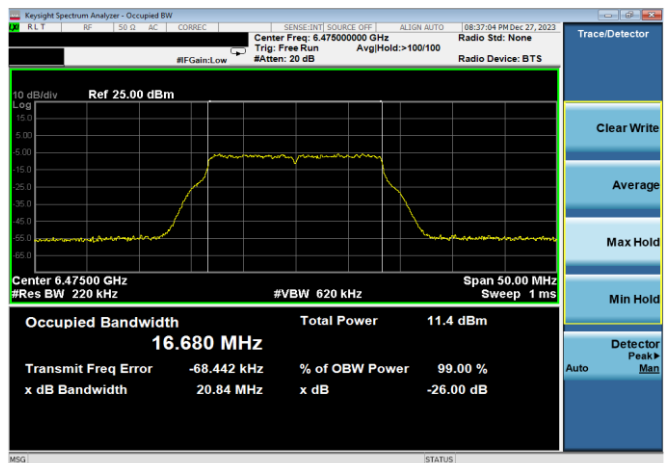


Plot 7-26. 26dB & 99% Bandwidth Plot Antenna 5T (20MHz 802.11a (UNII Band 6) – Ch. 105, 24Mbps)


FCC ID: BCGA2899 IC: 579C-A2899		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270066-26-R3.BCG	Test Dates: 11/29/2023 - 04/05/24	EUT Type: Tablet Device	Page 27 of 567

V 10.5 12/15/2021


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

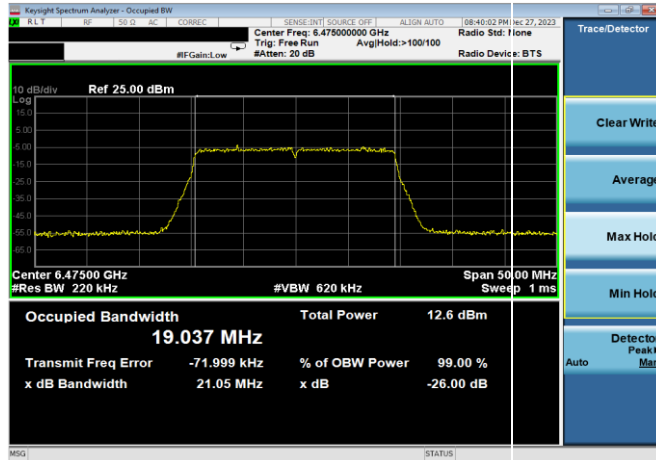


Plot 7-27. 26dB & 99% Bandwidth Plot Antenna 5T (20MHz 802.11ax (UNII Band 6) – Ch. 105, MCS4)

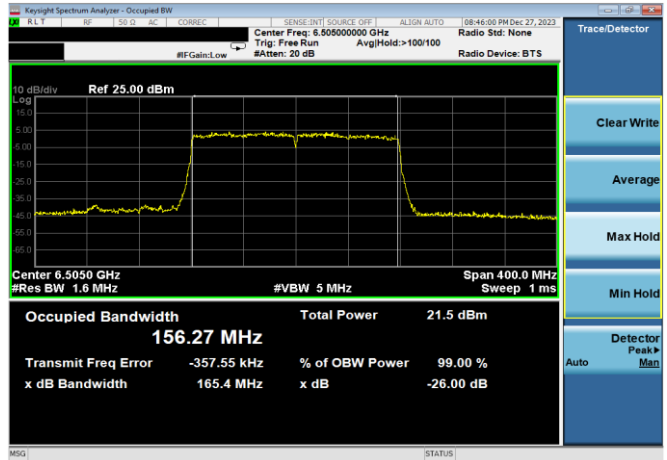


Plot 7-30. 26dB & 99% Bandwidth Plot Antenna 5T (160MHz 802.11ax (UNII Band 6) – Ch. 111, MCS4)

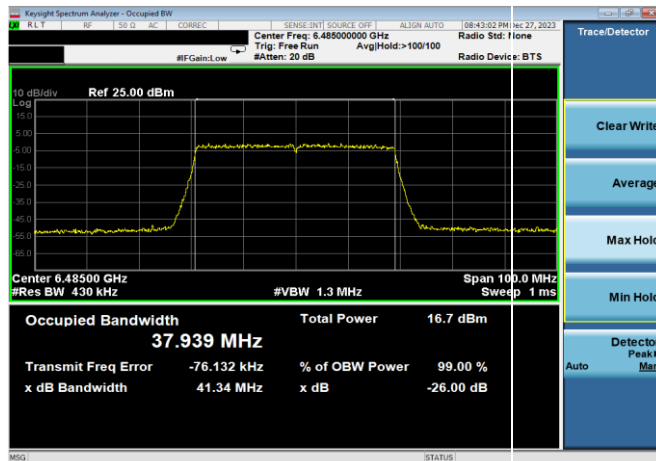


Plot 7-28. 26dB & 99% Bandwidth Plot Antenna 5T (40MHz 802.11ax (UNII Band 6) – Ch. 107, MCS4)

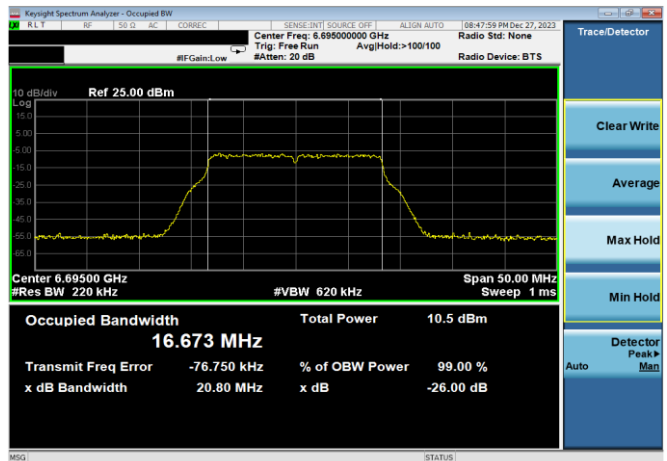

Plot 7-31. 26dB & 99% Bandwidth Plot Antenna 5T (20MHz 802.11a (UNII Band 7) – Ch. 149, 24Mbps)

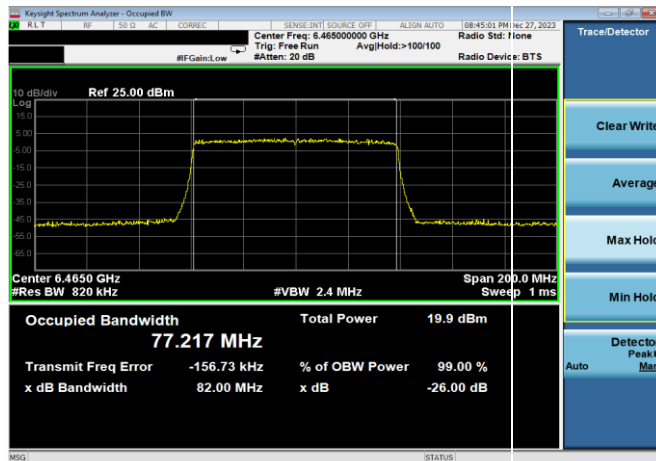


Plot 7-29. 26dB & 99% Bandwidth Plot Antenna 5T (80MHz 802.11ax (UNII Band 6) – Ch. 103, MCS4)

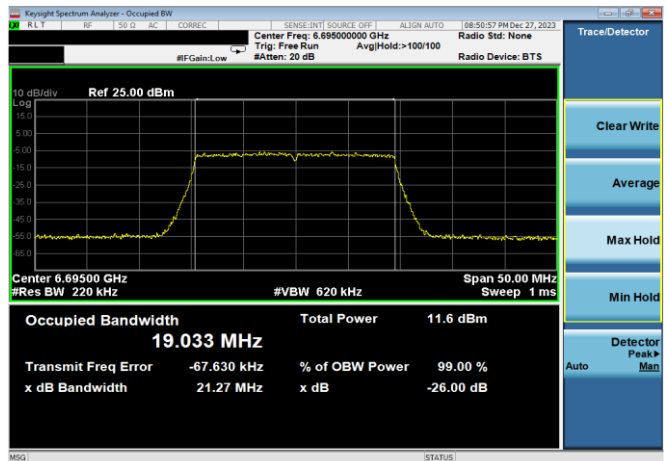


Plot 7-32. 26dB & 99% Bandwidth Plot Antenna 5T (20MHz 802.11ax (UNII Band 7) – Ch. 149, MCS4)


FCC ID: BCGA2899 IC: 579C-A2899		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270066-26-R3.BCG	Test Dates: 11/29/2023 - 04/05/24	EUT Type: Tablet Device	Page 28 of 567

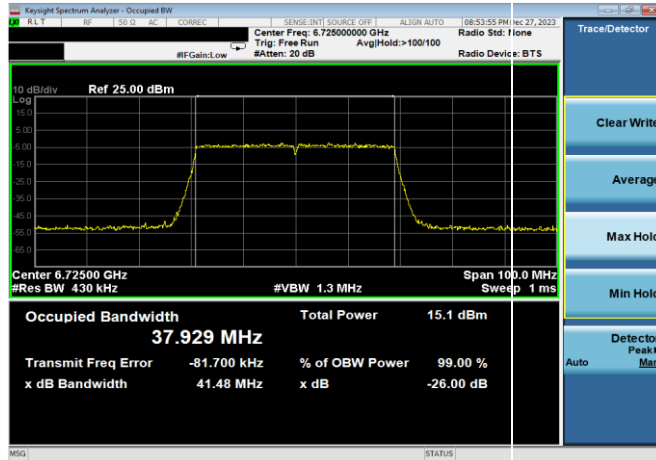


Plot 7-33. 26dB & 99% Bandwidth Plot Antenna 5T (40MHz 802.11ax (UNII Band 7) – Ch. 155, MCS4)

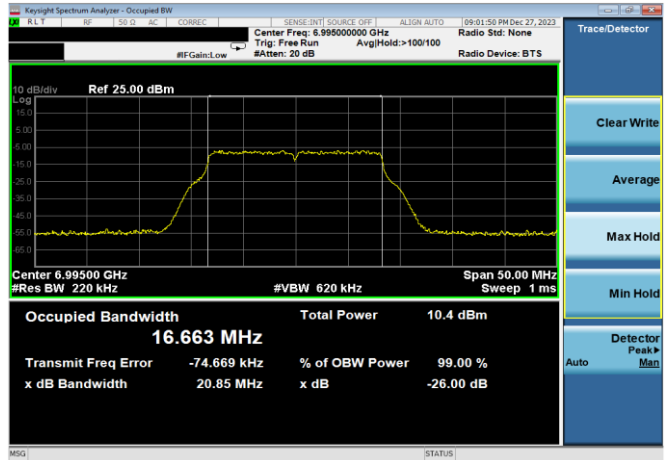


Plot 7-36. 26dB & 99% Bandwidth Plot Antenna 5T (20MHz 802.11a (UNII Band 8) – Ch. 209, 24Mbps)

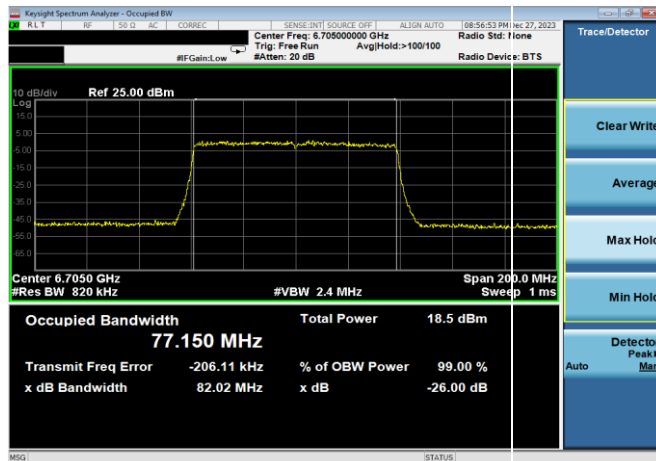


Plot 7-34. 26dB & 99% Bandwidth Plot Antenna 5T (80MHz 802.11ax (UNII Band 7) – Ch. 151, MCS4)

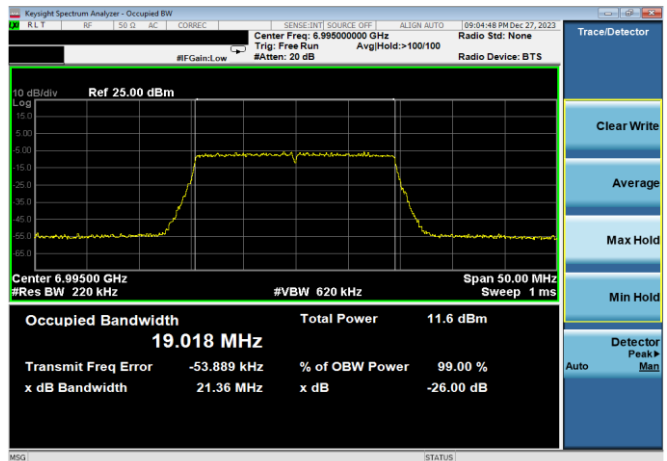

Plot 7-37. 26dB & 99% Bandwidth Plot Antenna 5T (20MHz 802.11ax (UNII Band 8) – Ch. 209, MCS4)

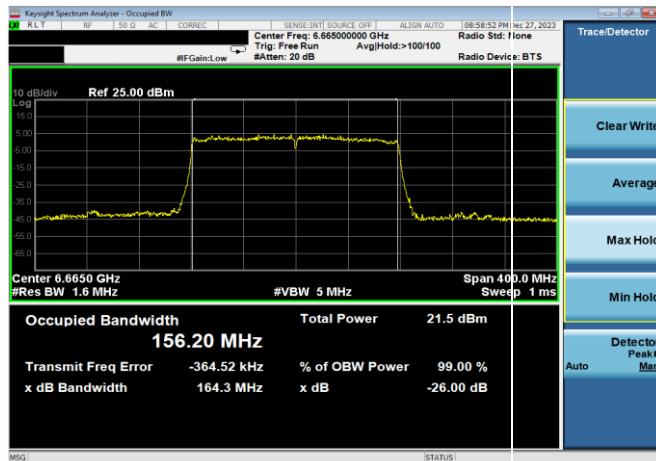


Plot 7-35. 26dB & 99% Bandwidth Plot Antenna 5T (160MHz 802.11ax (UNII Band 7) – Ch. 143, MCS4)

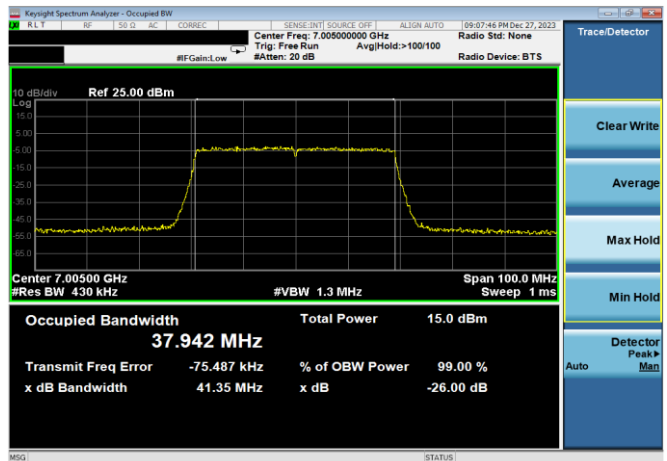


Plot 7-38. 26dB & 99% Bandwidth Plot Antenna 5T (40MHz 802.11ax (UNII Band 8) – Ch. 211, MCS4)

FCC ID: BCGA2899 IC: 579C-A2899		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270066-26-R3.BCG	Test Dates: 11/29/2023 - 04/05/24	EUT Type: Tablet Device	Page 29 of 567

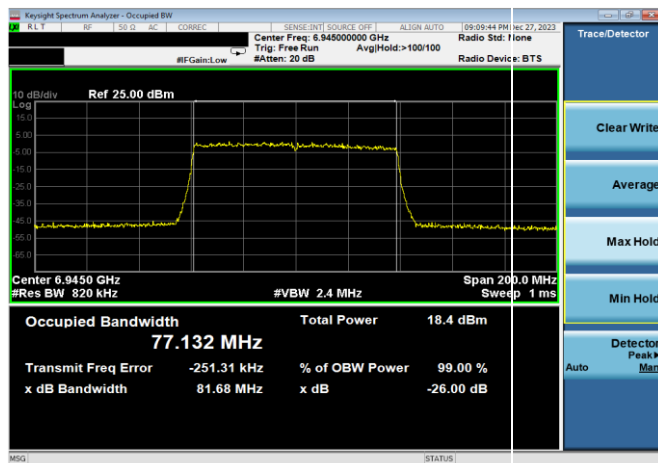

Plot 7-39. 26dB & 99% Bandwidth Plot Antenna 5T (80MHz 802.11ax (UNII Band 8) – Ch. 199, MCS4)

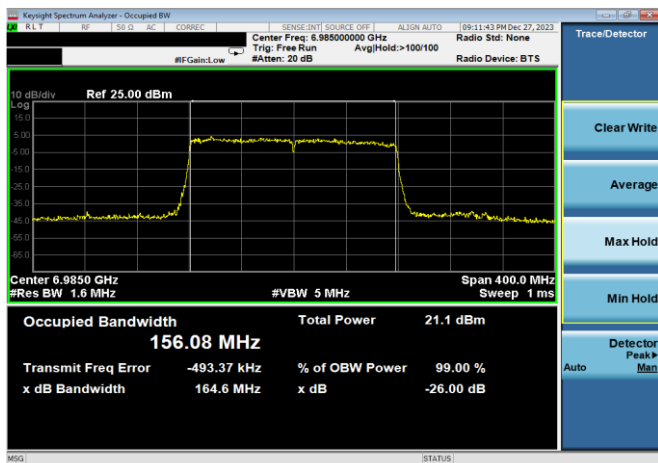


Plot 7-40. 26dB & 99% Bandwidth Plot Antenna 5T (160MHz 802.11ax (UNII Band 8) – Ch. 207, MCS4)

FCC ID: BCGA2899 IC: 579C-A2899	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270066-26-R3.BCG	Test Dates: 11/29/2023 - 04/05/24	EUT Type: Tablet Device	Page 30 of 567


V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


High Data Rate

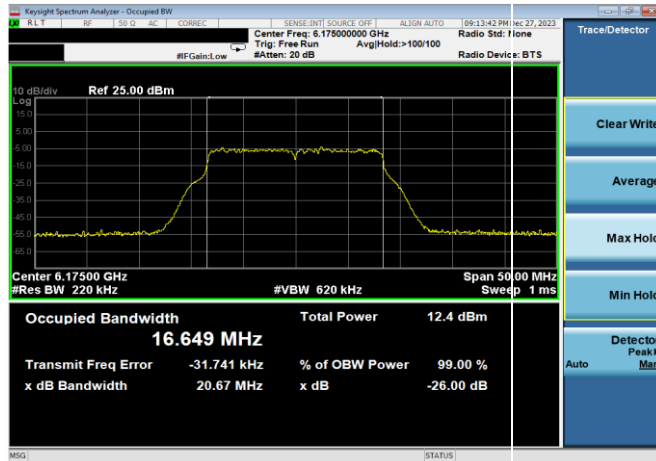


Plot 7-41. 26dB & 99% Bandwidth Plot Antenna 5T (20MHz 802.11a (UNII Band 5) – Ch. 45, 54Mbps)

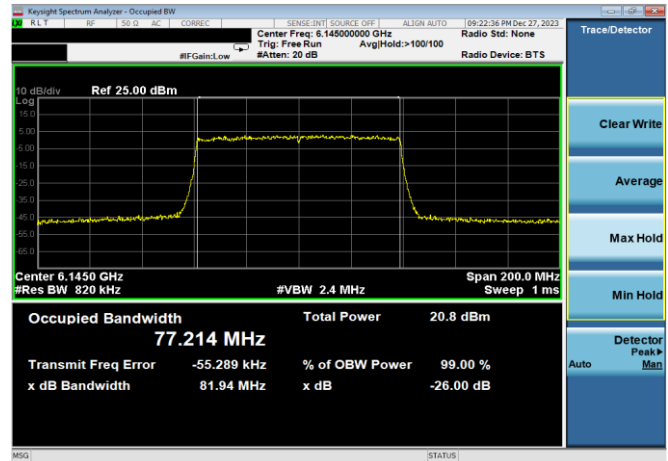


Plot 7-44. 26dB & 99% Bandwidth Plot Antenna 5T (80MHz 802.11ax (UNII Band 5) – Ch. 39, MCS11)

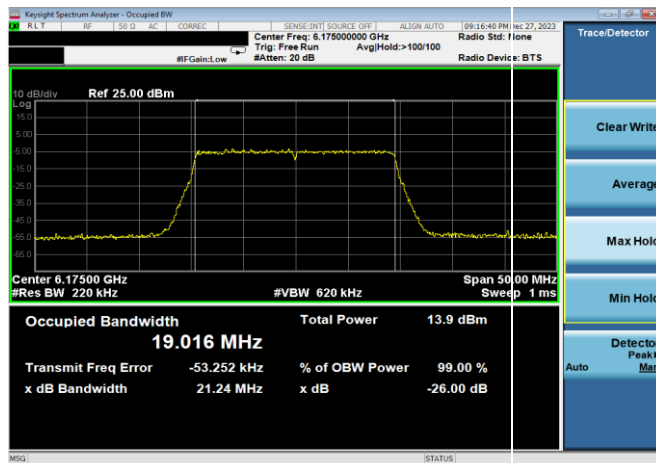


Plot 7-42. 26dB & 99% Bandwidth Plot Antenna 5T (20MHz 802.11ax (UNII Band 5) – Ch. 45, MCS11)

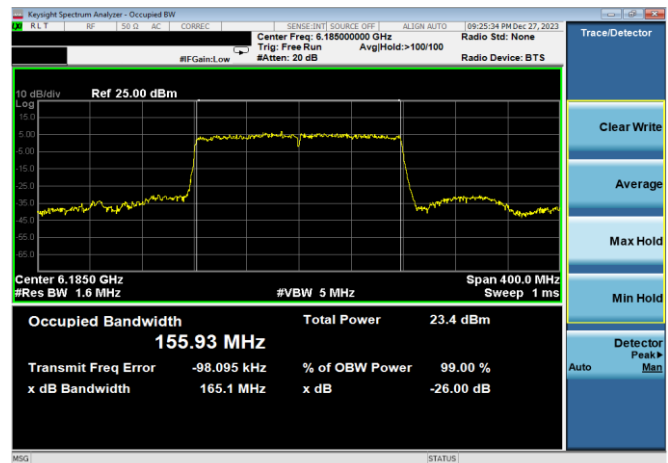

Plot 7-45. 26dB & 99% Bandwidth Plot Antenna 5T (160MHz 802.11ax (UNII Band 5) – Ch. 47, MCS11)

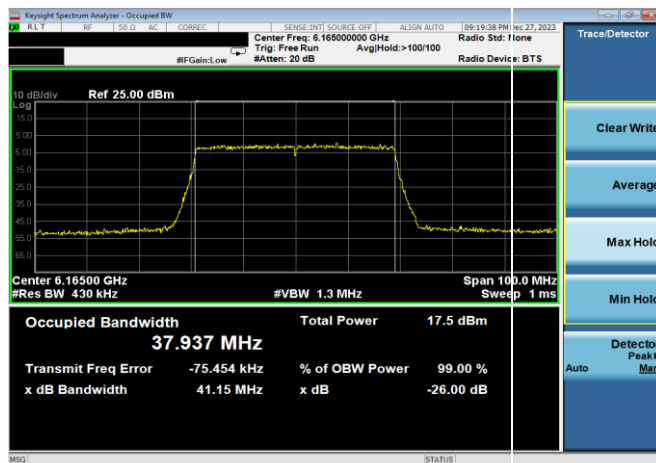

Plot 7-43. 26dB & 99% Bandwidth Plot Antenna 5T (40MHz 802.11ax (UNII Band 5) – Ch. 43, MCS11)

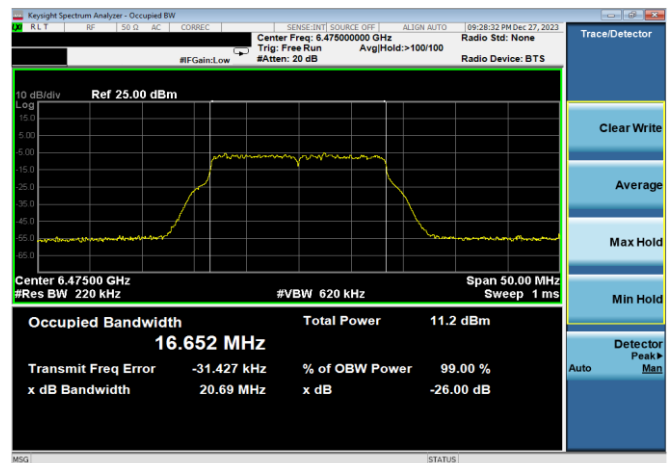


Plot 7-46. 26dB & 99% Bandwidth Plot Antenna 5T (20MHz 802.11a (UNII Band 6) – Ch. 105, 54Mbps)


FCC ID: BCGA2899 IC: 579C-A2899		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270066-26-R3.BCG	Test Dates: 11/29/2023 - 04/05/24	EUT Type: Tablet Device	Page 31 of 567

V 10.5 12/15/2021


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

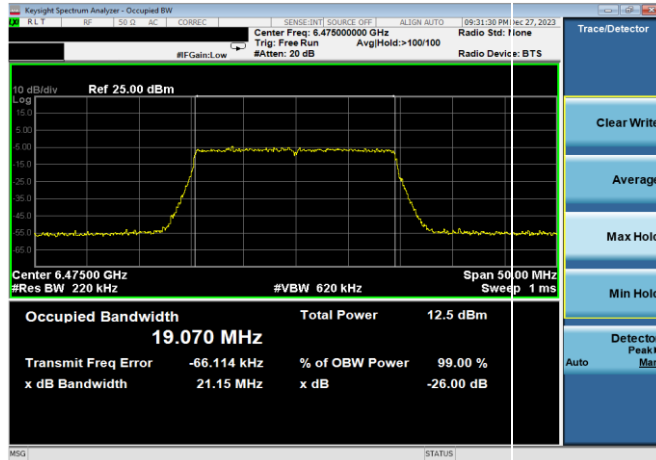


Plot 7-47. 26dB & 99% Bandwidth Plot Antenna 5T (20MHz
802.11ax (UNII Band 6) – Ch. 105, MCS11)

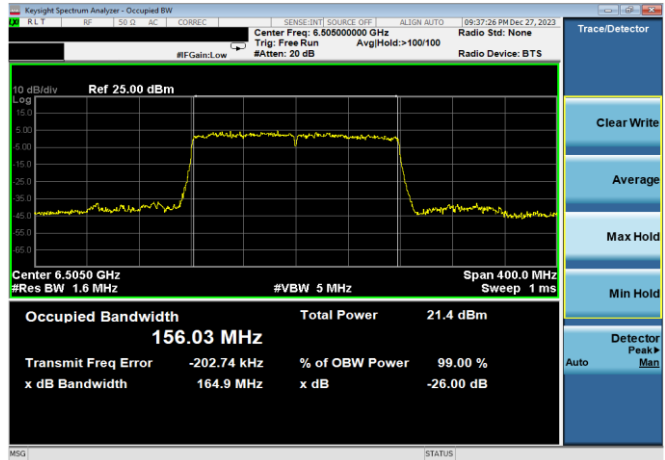


Plot 7-50. 26dB & 99% Bandwidth Plot Antenna 5T (160MHz
802.11ax (UNII Band 6) – Ch. 111, MCS11)

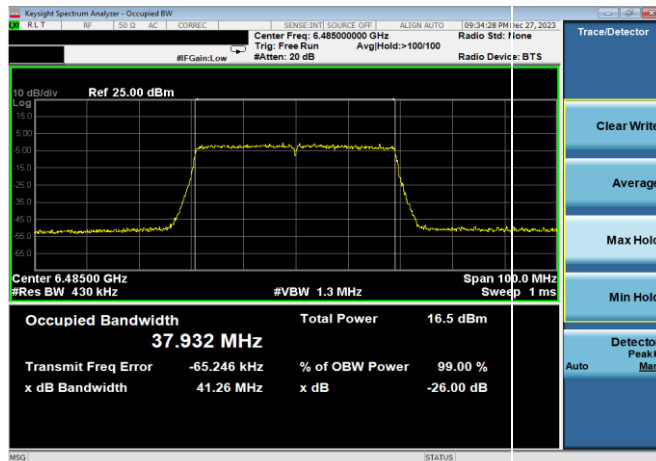


Plot 7-48. 26dB & 99% Bandwidth Plot Antenna 5T (40MHz
802.11ax (UNII Band 6) – Ch. 107, MCS11)

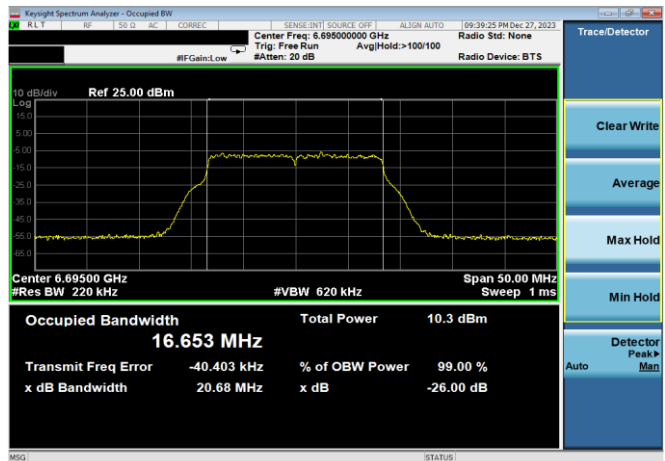

Plot 7-51. 26dB & 99% Bandwidth Plot Antenna 5T (20MHz
802.11a (UNII Band 7) – Ch. 149, 54Mbps)

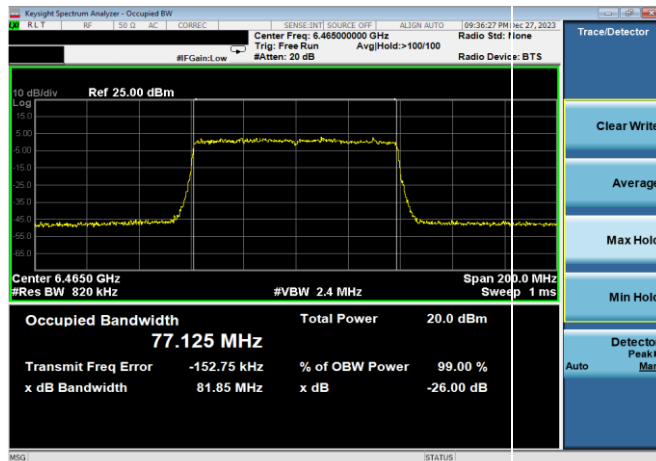

Plot 7-49. 26dB & 99% Bandwidth Plot Antenna 5T (80MHz
802.11ax (UNII Band 6) – Ch. 103, MCS11)

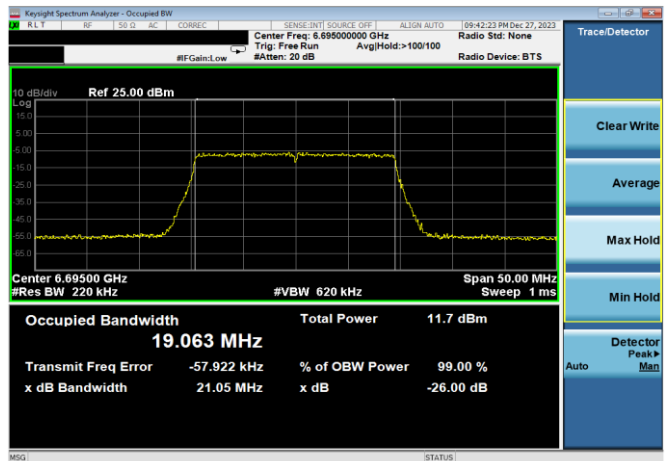


Plot 7-52. 26dB & 99% Bandwidth Plot Antenna 5T (20MHz
802.11ax (UNII Band 7) – Ch. 149, MCS11)


FCC ID: BCGA2899 IC: 579C-A2899		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270066-26-R3.BCG	Test Dates: 11/29/2023 - 04/05/24	EUT Type: Tablet Device	Page 32 of 567

V 10.5 12/15/2021


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

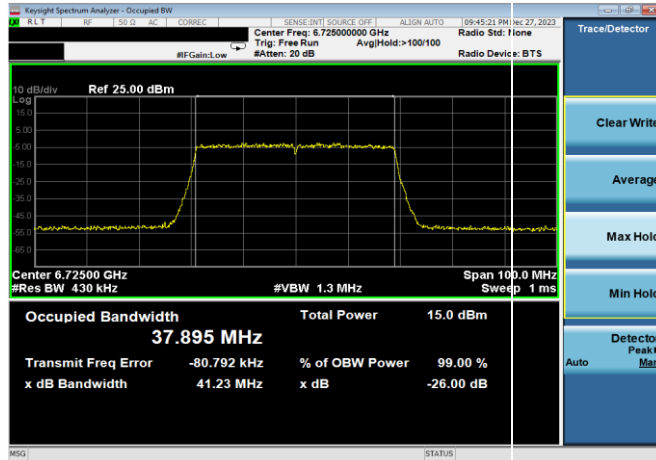


Plot 7-53. 26dB & 99% Bandwidth Plot Antenna 5T (40MHz 802.11ax (UNII Band 7) – Ch. 155, MCS11)

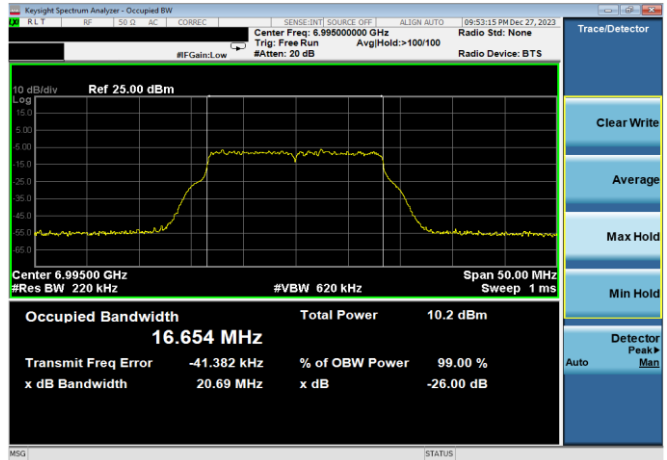


Plot 7-56. 26dB & 99% Bandwidth Plot Antenna 5T (20MHz 802.11a (UNII Band 8) – Ch. 209, 54Mbps)

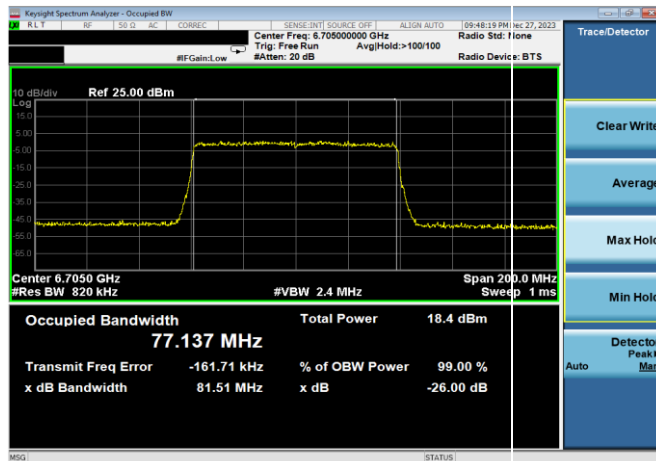


Plot 7-54. 26dB & 99% Bandwidth Plot Antenna 5T (80MHz 802.11ax (UNII Band 7) – Ch. 151, MCS11)

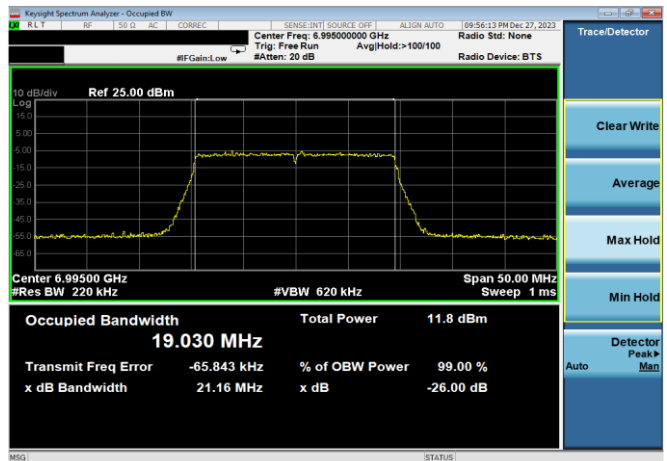

Plot 7-57. 26dB & 99% Bandwidth Plot Antenna 5T (20MHz 802.11ax (UNII Band 8) – Ch. 209, MCS11)

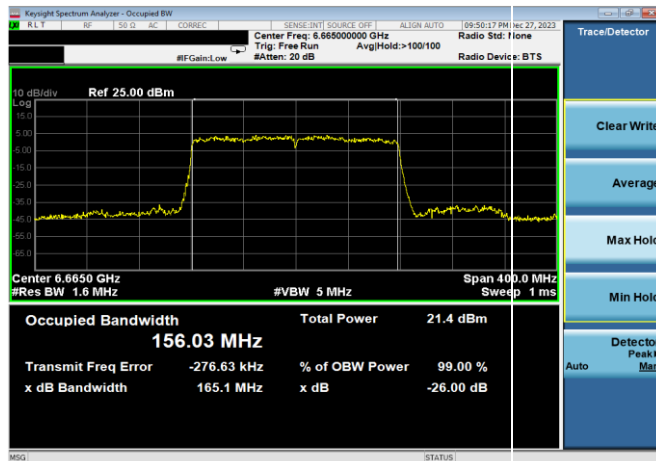

Plot 7-55. 26dB & 99% Bandwidth Plot Antenna 5T (160MHz 802.11ax (UNII Band 7) – Ch. 143, MCS11)

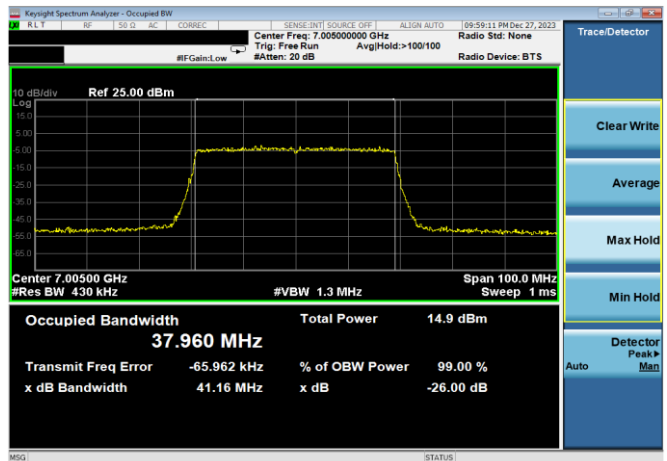


Plot 7-58. 26dB & 99% Bandwidth Plot Antenna 5T (40MHz 802.11ax (UNII Band 8) – Ch. 211, MCS11)


FCC ID: BCGA2899 IC: 579C-A2899		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270066-26-R3.BCG	Test Dates: 11/29/2023 - 04/05/24	EUT Type: Tablet Device	Page 33 of 567

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

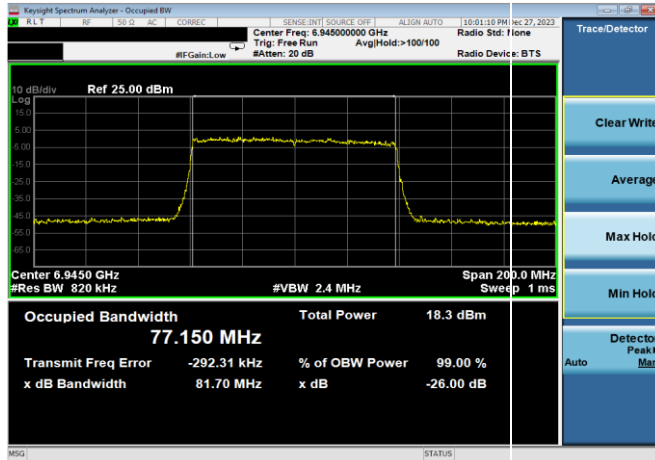

Plot 7-59. 26dB & 99% Bandwidth Plot Antenna 5T (80MHz 802.11ax (UNII Band 8) – Ch. 199, MCS11)

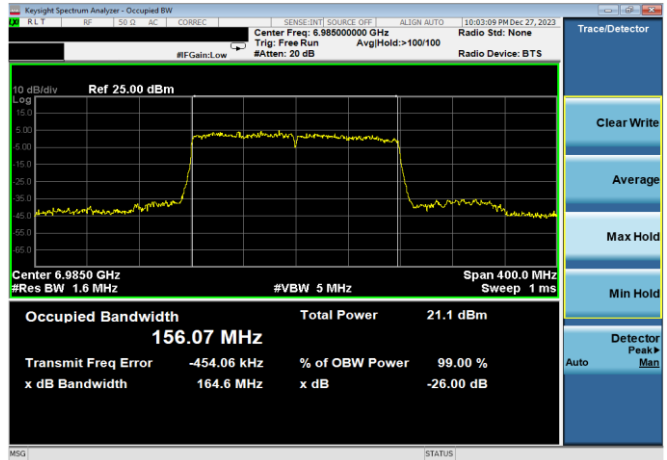

Plot 7-60. 26dB & 99% Bandwidth Plot Antenna 5T (160MHz 802.11ax (UNII Band 8) – Ch. 207, MCS11)

FCC ID: BCGA2899 IC: 579C-A2899	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270066-26-R3.BCG	Test Dates: 11/29/2023 - 04/05/24	EUT Type: Tablet Device	Page 34 of 567

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.2.2 Antenna 3b 26dB & 99% Bandwidth Measurements

	Frequency [MHz]	Channel	802.11 MODE	Data Rate [Mbps]	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]	Maximum Bandwidth Limit [MHz]	Pass / Fail
Band 5	5955	1	a	12	16.70	20.68	320	Pass
	6175	45	a	12	16.70	20.71	320	Pass
	6415	93	a	12	16.68	20.74	320	Pass
	5955	1	ax (20MHz)	24/25.8 (MCS2)	19.04	21.23	320	Pass
	6175	45	ax (20MHz)	24/25.8 (MCS2)	19.02	21.13	320	Pass
	6415	93	ax (20MHz)	24/25.8 (MCS2)	19.04	21.22	320	Pass
	5965	3	ax (40MHz)	49/51.6 (MCS2)	37.91	41.51	320	Pass
	6165	43	ax (40MHz)	49/51.6 (MCS2)	37.95	41.53	320	Pass
	6405	91	ax (40MHz)	49/51.6 (MCS2)	37.92	41.17	320	Pass
	5985	7	ax (80MHz)	102/108.1 (MCS2)	77.19	81.68	320	Pass
	6145	39	ax (80MHz)	102/108.1 (MCS2)	77.18	81.75	320	Pass
	6385	87	ax (80MHz)	102/108.1 (MCS2)	77.21	81.99	320	Pass
	6025	15	ax (160MHz)	183.8/216.2 (MCS2)	156.00	164.10	320	Pass
	6185	47	ax (160MHz)	183.8/216.2 (MCS2)	156.21	165.10	320	Pass
Band 6	6345	79	ax (160MHz)	183.8/216.2 (MCS2)	156.22	164.20	320	Pass
	6435	97	a	12	16.69	20.77	320	Pass
	6475	105	a	12	16.67	20.74	320	Pass
	6515	113	a	12	16.70	20.84	320	Pass
	6345	97	ax (20MHz)	24/25.8 (MCS2)	19.07	21.51	320	Pass
	6475	105	ax (20MHz)	24/25.8 (MCS2)	19.00	21.27	320	Pass
	6515	113	ax (20MHz)	24/25.8 (MCS2)	19.02	21.33	320	Pass
	6445	99	ax (40MHz)	49/51.6 (MCS2)	37.94	41.04	320	Pass
	6485	107	ax (40MHz)	49/51.6 (MCS2)	37.93	41.52	320	Pass
	6525	115	ax (40MHz)	49/51.6 (MCS2)	37.97	41.38	320	Pass
Band 7	6465	103	ax (80MHz)	102/108.1 (MCS2)	77.11	82.03	320	Pass
	6505	111	ax (160MHz)	183.8/216.2 (MCS2)	156.10	164.60	320	Pass
	6535	117	a	12	16.70	20.73	320	Pass
	6695	149	a	12	16.70	20.85	320	Pass
	6875	185	a	12	16.71	20.63	320	Pass
	6535	117	ax (20MHz)	24/25.8 (MCS2)	19.03	21.31	320	Pass
	6695	149	ax (20MHz)	24/25.8 (MCS2)	19.05	21.26	320	Pass
	6875	185	ax (20MHz)	24/25.8 (MCS2)	19.04	21.30	320	Pass
	6565	123	ax (40MHz)	49/51.6 (MCS2)	37.93	41.59	320	Pass
	6725	155	ax (40MHz)	49/51.6 (MCS2)	37.90	41.27	320	Pass
	6885	179	ax (40MHz)	49/51.6 (MCS2)	37.95	41.73	320	Pass
	6545	119	ax (80MHz)	102/108.1 (MCS2)	77.18	81.87	320	Pass
	6705	151	ax (80MHz)	102/108.1 (MCS2)	77.15	81.63	320	Pass
	6865	183	ax (80MHz)	102/108.1 (MCS2)	77.12	81.98	320	Pass
Band 8	6665	143	ax (160MHz)	183.8/216.2 (MCS2)	156.12	165.00	320	Pass
	6825	175	ax (160MHz)	183.8/216.2 (MCS2)	156.06	164.60	320	Pass
	6895	189	a	12	16.69	20.79	320	Pass
	6995	209	a	12	16.71	20.78	320	Pass
	7115	233	a	12	16.69	20.91	320	Pass
	6895	189	ax (20MHz)	24/25.8 (MCS2)	19.03	21.16	320	Pass
	6995	209	ax (20MHz)	24/25.8 (MCS2)	19.00	21.26	320	Pass
	7115	233	ax (20MHz)	24/25.8 (MCS2)	19.02	21.14	320	Pass
	6925	187	ax (40MHz)	49/51.6 (MCS2)	37.91	41.42	320	Pass
	7005	211	ax (40MHz)	49/51.6 (MCS2)	37.91	41.47	320	Pass
	7085	227	ax (40MHz)	49/51.6 (MCS2)	37.95	41.26	320	Pass
	6945	199	ax (80MHz)	102/108.1 (MCS2)	77.11	81.81	320	Pass
	7025	215	ax (80MHz)	102/108.1 (MCS2)	77.23	81.58	320	Pass
	6985	207	ax (160MHz)	183.8/216.2 (MCS2)	156.12	164.60	320	Pass

Table 7-5. Conducted Bandwidth Measurements Antenna 3b (Low Data Rate)

FCC ID: BCGA2899 IC: 579C-A2899	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270066-26-R3.BCG	Test Dates: 11/29/2023 - 04/05/24	EUT Type: Tablet Device	Page 35 of 567

V 10.5 12/15/2021

	Frequency [MHz]	Channel	802.11 MODE	Data Rate [Mbps]	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]	Maximum Bandwidth Limit [MHz]	Pass / Fail
Band 5	5955	1	a	24	16.65	20.85	320	Pass
	6175	45	a	24	16.70	20.77	320	Pass
	6415	93	a	24	16.68	20.68	320	Pass
	5955	1	ax (20MHz)	49/51.6 (MCS4)	19.02	21.15	320	Pass
	6175	45	ax (20MHz)	49/51.6 (MCS4)	19.02	21.14	320	Pass
	6415	93	ax (20MHz)	49/51.6 (MCS4)	19.00	21.03	320	Pass
	5965	3	ax (40MHz)	98/103.2 (MCS4)	37.91	41.34	320	Pass
	6165	43	ax (40MHz)	98/103.2 (MCS4)	37.90	41.42	320	Pass
	6405	91	ax (40MHz)	98/103.2 (MCS4)	37.86	40.92	320	Pass
	5985	7	ax (80MHz)	204/216.2 (MCS4)	77.09	81.45	320	Pass
	6145	39	ax (80MHz)	204/216.2 (MCS4)	77.14	81.69	320	Pass
	6385	87	ax (80MHz)	204/216.2 (MCS4)	77.06	81.45	320	Pass
	6025	15	ax (160MHz)	367.5/432.4 (MCS4)	156.04	164.10	320	Pass
Band 6	6185	47	ax (160MHz)	367.5/432.4 (MCS4)	155.97	164.40	320	Pass
	6345	79	ax (160MHz)	367.5/432.4 (MCS4)	156.45	164.40	320	Pass
	6435	97	a	24	16.68	20.63	320	Pass
	6475	105	a	24	16.67	20.79	320	Pass
	6515	113	a	24	16.67	20.93	320	Pass
	6345	97	ax (20MHz)	49/51.6 (MCS4)	19.03	21.08	320	Pass
	6475	105	ax (20MHz)	49/51.6 (MCS4)	19.02	21.02	320	Pass
	6515	113	ax (20MHz)	49/51.6 (MCS4)	19.01	21.25	320	Pass
	6445	99	ax (40MHz)	98/103.2 (MCS4)	37.96	41.37	320	Pass
	6485	107	ax (40MHz)	98/103.2 (MCS4)	37.95	41.15	320	Pass
Band 7	6525	115	ax (40MHz)	98/103.2 (MCS4)	37.93	41.44	320	Pass
	6465	103	ax (80MHz)	204/216.2 (MCS4)	77.13	81.73	320	Pass
	6505	111	ax (160MHz)	367.5/432.4 (MCS4)	156.10	164.10	320	Pass
	6535	117	a	24	16.66	20.92	320	Pass
	6695	149	a	24	16.66	20.88	320	Pass
	6875	185	a	24	16.68	20.76	320	Pass
	6535	117	ax (20MHz)	49/51.6 (MCS4)	19.02	21.16	320	Pass
	6695	149	ax (20MHz)	49/51.6 (MCS4)	18.98	21.02	320	Pass
	6875	185	ax (20MHz)	49/51.6 (MCS4)	19.02	21.17	320	Pass
	6565	123	ax (40MHz)	98/103.2 (MCS4)	37.91	40.99	320	Pass
	6725	155	ax (40MHz)	98/103.2 (MCS4)	37.89	41.30	320	Pass
	6885	179	ax (40MHz)	98/103.2 (MCS4)	37.87	41.20	320	Pass
	6545	119	ax (80MHz)	204/216.2 (MCS4)	77.18	81.52	320	Pass
Band 8	6705	151	ax (80MHz)	204/216.2 (MCS4)	77.19	81.47	320	Pass
	6865	183	ax (80MHz)	204/216.2 (MCS4)	77.14	81.92	320	Pass
	6665	143	ax (160MHz)	367.5/432.4 (MCS4)	156.12	164.70	320	Pass
	6825	175	ax (160MHz)	367.5/432.4 (MCS4)	156.11	165.40	320	Pass
	6895	189	a	24	16.68	20.81	320	Pass
	6995	209	a	24	16.69	20.89	320	Pass
	7115	233	a	24	16.68	20.68	320	Pass
	6895	189	ax (20MHz)	49/51.6 (MCS4)	18.99	21.00	320	Pass
	6995	209	ax (20MHz)	49/51.6 (MCS4)	19.02	21.13	320	Pass
	7115	233	ax (20MHz)	49/51.6 (MCS4)	18.99	21.31	320	Pass
	6925	187	ax (40MHz)	98/103.2 (MCS4)	37.92	41.09	320	Pass
	7005	211	ax (40MHz)	98/103.2 (MCS4)	37.89	41.14	320	Pass
	7085	227	ax (40MHz)	98/103.2 (MCS4)	37.85	40.92	320	Pass
	6945	199	ax (80MHz)	204/216.2 (MCS4)	77.16	81.54	320	Pass
	7025	215	ax (80MHz)	204/216.2 (MCS4)	77.19	81.22	320	Pass
	6985	207	ax (160MHz)	367.5/432.4 (MCS4)	156.23	165.10	320	Pass

Table 7-6. Conducted Bandwidth Measurements Antenna 3b (Mid Data Rate)

FCC ID: BCGA2899 IC: 579C-A2899	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270066-26-R3.BCG	Test Dates: 11/29/2023 - 04/05/24	EUT Type: Tablet Device	Page 36 of 567

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

	Frequency [MHz]	Channel	802.11 MODE	Data Rate [Mbps]	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]	Maximum Bandwidth Limit [MHz]	Pass / Fail
Band 5	5955	1	a	54	16.65	20.68	320	Pass
	6175	45	a	54	16.67	20.72	320	Pass
	6415	93	a	54	16.65	20.66	320	Pass
	5955	1	ax (20MHz)	135/143.4 (MCS11)	19.01	21.12	320	Pass
	6175	45	ax (20MHz)	135/143.4 (MCS11)	19.02	21.04	320	Pass
	6415	93	ax (20MHz)	135/143.4 (MCS11)	19.05	21.14	320	Pass
	5965	3	ax (40MHz)	271/286.8 (MCS11)	37.93	41.19	320	Pass
	6165	43	ax (40MHz)	271/286.8 (MCS11)	37.92	41.22	320	Pass
	6405	91	ax (40MHz)	271/286.8 (MCS11)	37.89	41.58	320	Pass
	5985	7	ax (80MHz)	567/600.5 (MCS11)	77.18	81.36	320	Pass
	6145	39	ax (80MHz)	567/600.5 (MCS11)	77.16	81.68	320	Pass
	6385	87	ax (80MHz)	567/600.5 (MCS11)	77.22	81.44	320	Pass
	6025	15	ax (160MHz)	1020.8/1201 (MCS11)	155.96	164.80	320	Pass
Band 6	6185	47	ax (160MHz)	1020.8/1201 (MCS11)	156.19	164.30	320	Pass
	6345	79	ax (160MHz)	1020.8/1201 (MCS11)	156.33	164.80	320	Pass
	6435	97	a	54	16.64	20.65	320	Pass
	6475	105	a	54	16.66	20.72	320	Pass
	6515	113	a	54	16.66	20.74	320	Pass
	6345	97	ax (20MHz)	135/143.4 (MCS11)	19.06	21.00	320	Pass
	6475	105	ax (20MHz)	135/143.4 (MCS11)	19.02	21.21	320	Pass
	6515	113	ax (20MHz)	135/143.4 (MCS11)	19.05	21.17	320	Pass
	6445	99	ax (40MHz)	271/286.8 (MCS11)	37.95	40.87	320	Pass
	6485	107	ax (40MHz)	271/286.8 (MCS11)	37.93	40.94	320	Pass
	6525	115	ax (40MHz)	271/286.8 (MCS11)	37.90	41.09	320	Pass
	6465	103	ax (80MHz)	567/600.5 (MCS11)	77.17	81.18	320	Pass
	6505	111	ax (160MHz)	1020.8/1201 (MCS11)	156.41	164.30	320	Pass
Band 7	6535	117	a	54	16.65	20.57	320	Pass
	6695	149	a	54	16.62	20.74	320	Pass
	6875	185	a	54	16.67	20.49	320	Pass
	6535	117	ax (20MHz)	135/143.4 (MCS11)	19.00	21.20	320	Pass
	6695	149	ax (20MHz)	135/143.4 (MCS11)	19.04	21.14	320	Pass
	6875	185	ax (20MHz)	135/143.4 (MCS11)	19.01	21.33	320	Pass
	6565	123	ax (40MHz)	271/286.8 (MCS11)	37.88	41.15	320	Pass
	6725	155	ax (40MHz)	271/286.8 (MCS11)	37.85	41.43	320	Pass
	6885	179	ax (40MHz)	271/286.8 (MCS11)	37.89	41.28	320	Pass
	6545	119	ax (80MHz)	567/600.5 (MCS11)	77.19	81.79	320	Pass
	6705	151	ax (80MHz)	567/600.5 (MCS11)	76.95	81.62	320	Pass
	6865	183	ax (80MHz)	567/600.5 (MCS11)	77.06	81.33	320	Pass
	6665	143	ax (160MHz)	1020.8/1201 (MCS11)	156.08	164.60	320	Pass
Band 8	6825	175	ax (160MHz)	1020.8/1201 (MCS11)	156.07	164.70	320	Pass
	6895	189	a	54	16.67	20.65	320	Pass
	6995	209	a	54	16.63	20.53	320	Pass
	7115	233	a	54	16.67	20.70	320	Pass
	6895	189	ax (20MHz)	135/143.4 (MCS11)	18.99	21.19	320	Pass
	6995	209	ax (20MHz)	135/143.4 (MCS11)	19.01	21.24	320	Pass
	7115	233	ax (20MHz)	135/143.4 (MCS11)	19.00	21.09	320	Pass
	6925	187	ax (40MHz)	271/286.8 (MCS11)	37.81	40.92	320	Pass
	7005	211	ax (40MHz)	271/286.8 (MCS11)	37.87	41.15	320	Pass
	7085	227	ax (40MHz)	271/286.8 (MCS11)	37.88	41.36	320	Pass
	6945	199	ax (80MHz)	567/600.5 (MCS11)	77.23	81.31	320	Pass
	7025	215	ax (80MHz)	567/600.5 (MCS11)	77.08	81.57	320	Pass
	6985	207	ax (160MHz)	1020.8/1201 (MCS11)	156.23	165.20	320	Pass


Table 7-7. Conducted Bandwidth Measurements Antenna 3b (High Data Rate)

FCC ID: BCGA2899 IC: 579C-A2899	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270066-26-R3.BCG	Test Dates: 11/29/2023 - 04/05/24	EUT Type: Tablet Device	Page 37 of 567


V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


Low Data Rate

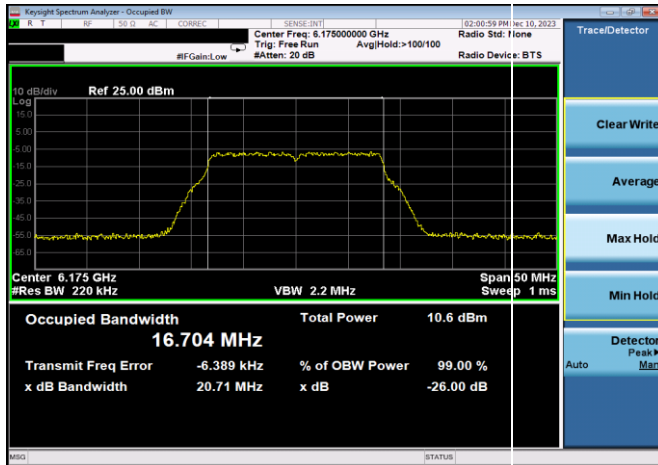


Plot 7-61. 26dB & 99% Bandwidth Plot Antenna 3b (20MHz 802.11a (UNII Band 5) – Ch. 45, 12Mbps)

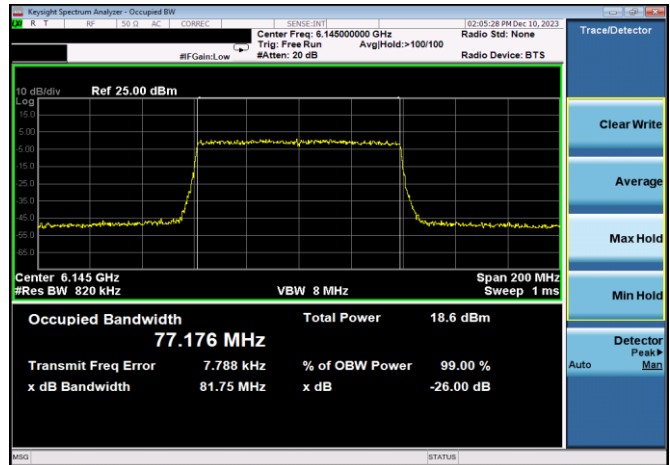


Plot 7-64. 26dB & 99% Bandwidth Plot Antenna 3b (80MHz 802.11ax (UNII Band 5) – Ch. 39, MCS2)

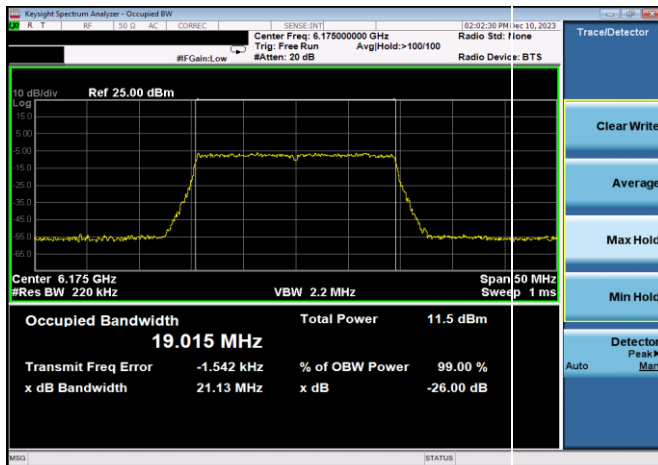


Plot 7-62. 26dB & 99% Bandwidth Plot Antenna 3b (20MHz 802.11ax (UNII Band 5) – Ch. 45, MCS2)

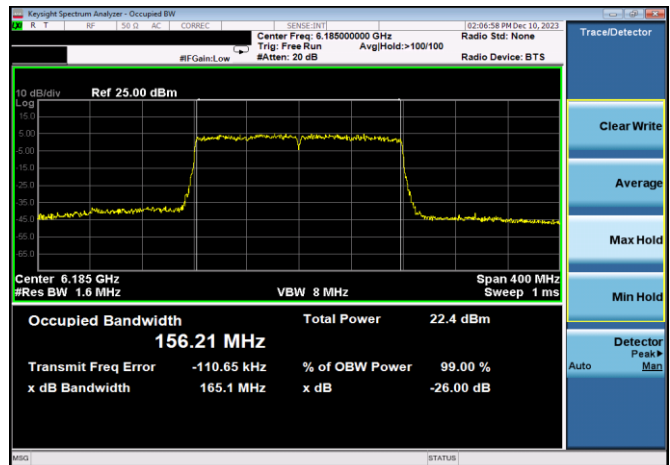

Plot 7-65. 26dB & 99% Bandwidth Plot Antenna 3b (160MHz 802.11ax (UNII Band 5) – Ch. 47, MCS2)

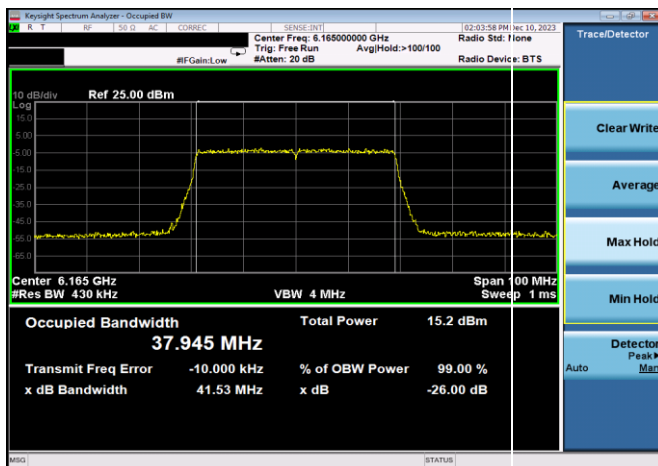

Plot 7-63. 26dB & 99% Bandwidth Plot Antenna 3b (40MHz 802.11ax (UNII Band 5) – Ch. 43, MCS2)

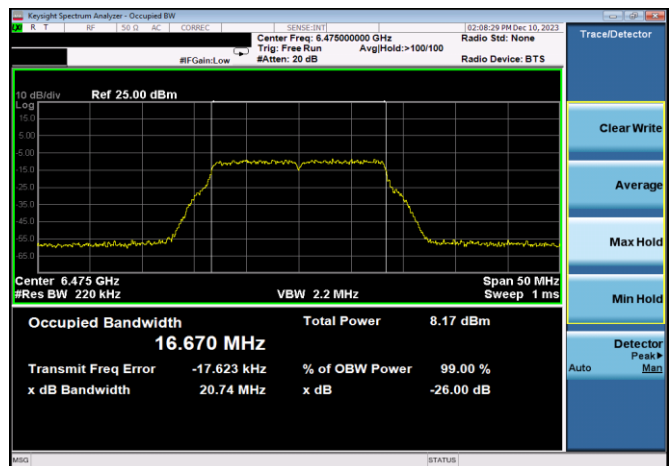

Plot 7-66. 26dB & 99% Bandwidth Plot Antenna 3b (20MHz 802.11a (UNII Band 6) – Ch. 105, 12Mbps)

FCC ID: BCGA2899 IC: 579C-A2899		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270066-26-R3.BCG	Test Dates: 11/29/2023 - 04/05/24	EUT Type: Tablet Device	Page 38 of 567

V 10.5 12/15/2021