


### 7.7.24 SDM Diversity Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]


**RU26**

Worst Case Mode: 802.11ax  
 Worst Case Transfer Rate: MCS11  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5985MHz  
 Channel: 7

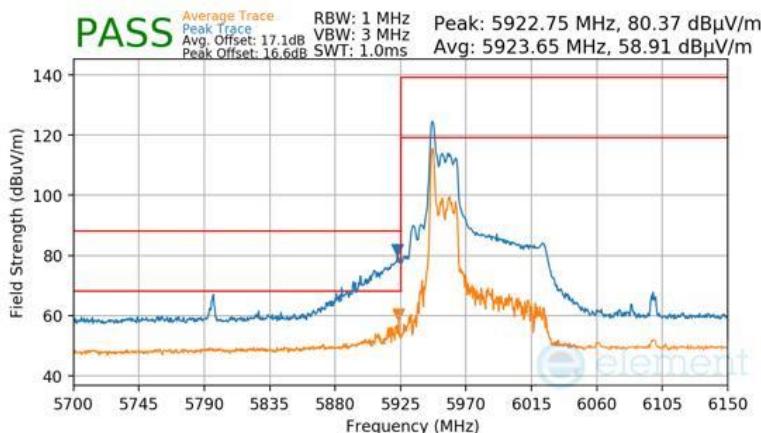

**Plot 7-1799. SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5 – RU26)**

Worst Case Mode: 802.11ax  
 Worst Case Transfer Rate: MCS11  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 7025MHz  
 Channel: 215

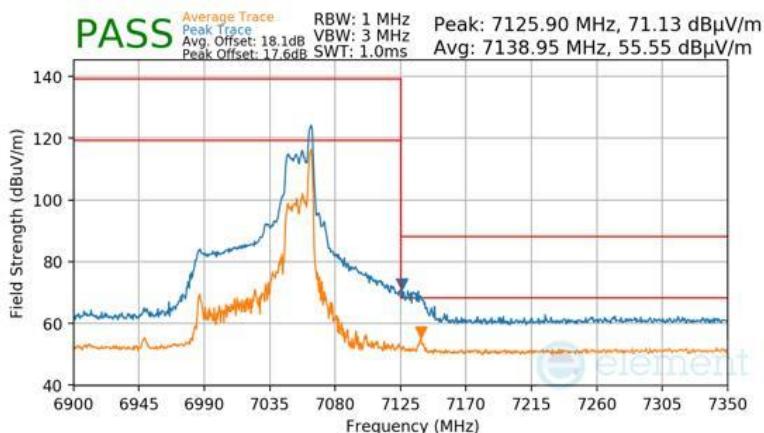


**Plot 7-1800. SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8 – RU26)**

FCC ID: BCGA2899 IC: 579C-A2899	 <b>element</b> <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Technical Manager
Test Report S/N: 1C2311270066-27-R4.BCG	Test Dates: 11/29/2023 - 04/05/2024	EUT Type: Tablet Device	Page 578 of 607	


**RU996**

Worst Case Mode: 802.11ax  
 Worst Case Transfer Rate: MCS11  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5985MHz  
 Channel: 7

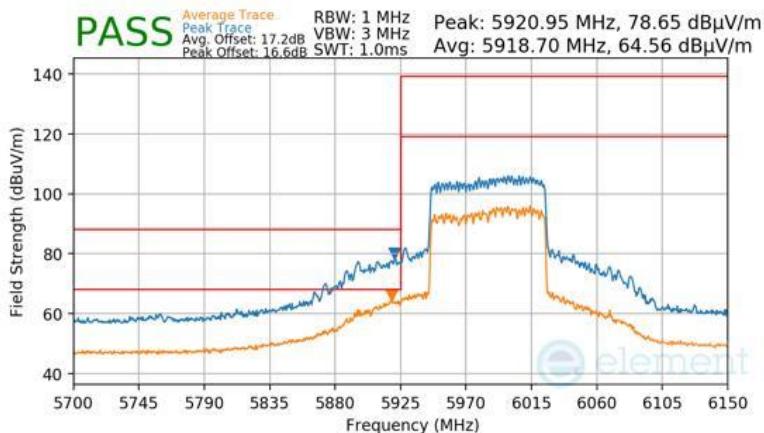

**Plot 7-1801. SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5 – RU996)**

Worst Case Mode: 802.11ax  
 Worst Case Transfer Rate: MCS11  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 7025MHz  
 Channel: 215

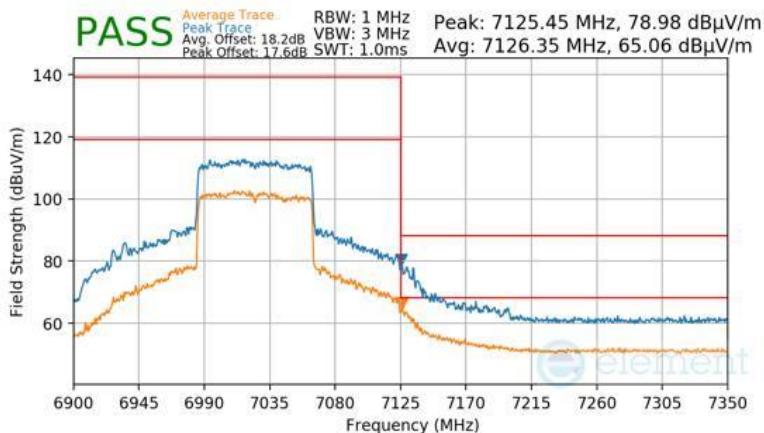

**Plot 7-1802. SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8 – RU996)**


FCC ID: BCGA2899 IC: 579C-A2899	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		
Test Report S/N: 1C2311270066-27-R4.BCG	Test Dates: 11/29/2023 - 04/05/2024	EUT Type: Tablet Device	Approved by: Technical Manager

### 7.7.25 SDM Diversity Radiated Band Edge Measurements (160MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]


**RU26**

Worst Case Mode: 802.11ax  
 Worst Case Transfer Rate: MCS11  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 6025MHz  
 Channel: 15

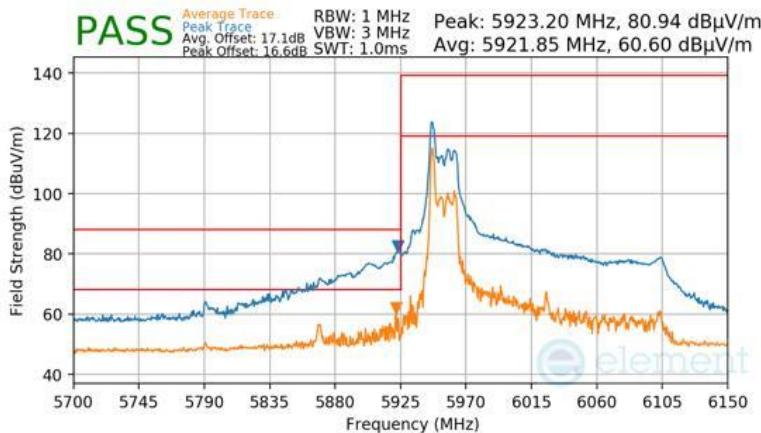

**Plot 7-1803. SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5 – RU26)**


Worst Case Mode: 802.11ax  
 Worst Case Transfer Rate: MCS11  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 6185MHz  
 Channel: 47

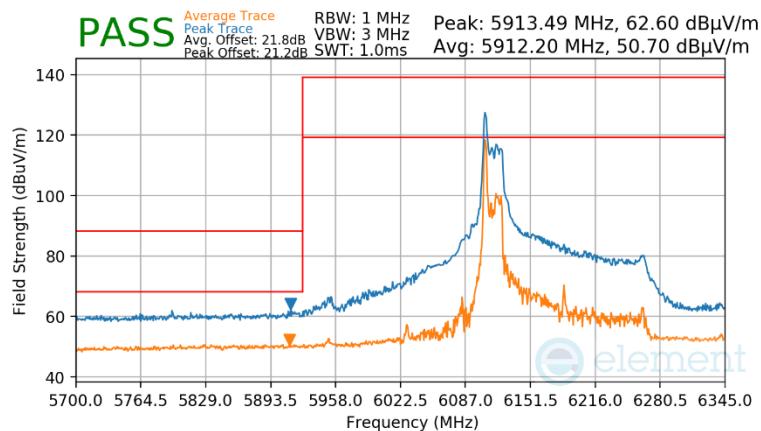

**Plot 7-1804. SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5 – RU26)**

FCC ID: BCGA2899 IC: 579C-A2899	 <b>element</b> <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Technical Manager
Test Report S/N: 1C2311270066-27-R4.BCG	Test Dates: 11/29/2023 - 04/05/2024	EUT Type: Tablet Device		Page 580 of 607 V 10.5 12/15/2021

Worst Case Mode: 802.11ax  
 Worst Case Transfer Rate: MCS11  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 6985MHz  
 Channel: 207

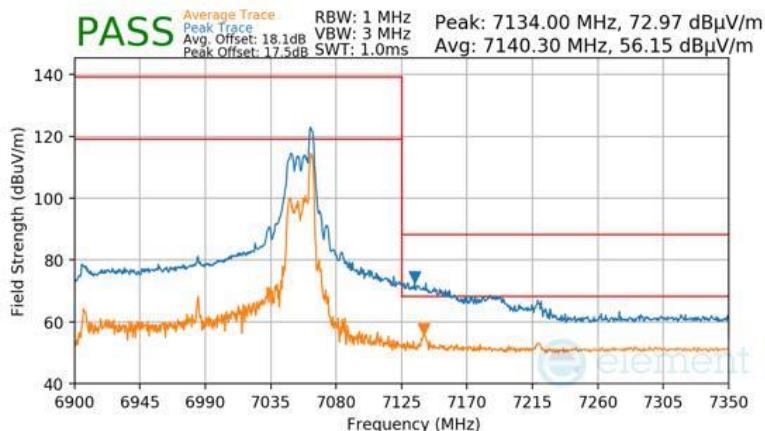


**Plot 7-1805. SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8 – RU26)**

FCC ID: BCGA2899 IC: 579C-A2899	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Technical Manager
Test Report S/N: 1C2311270066-27-R4.BCG	Test Dates: 11/29/2023 - 04/05/2024	EUT Type: Tablet Device	Page 581 of 607	


## RU996x2

Worst Case Mode: 802.11ax  
 Worst Case Transfer Rate: MCS11  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 6025MHz  
 Channel: 15

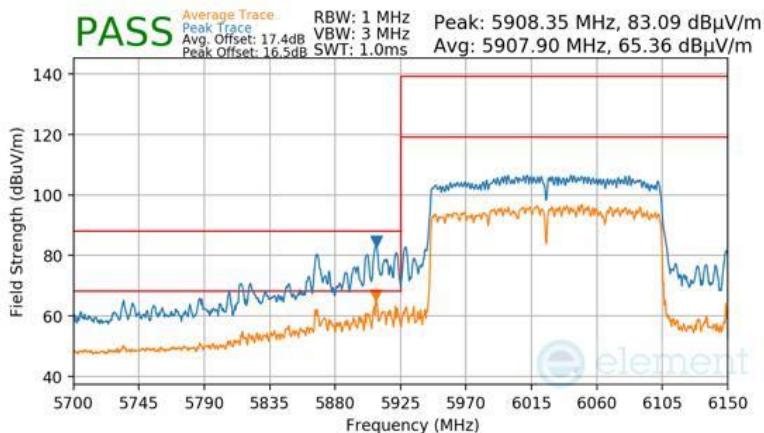

**Plot 7-1806. SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5 – RU996x2)**


Worst Case Mode: 802.11ax  
 Worst Case Transfer Rate: MCS11  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 6185MHz  
 Channel: 47

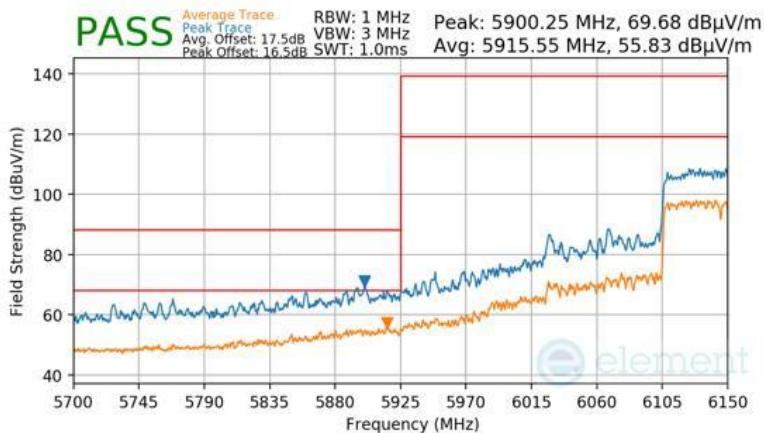

**Plot 7-1807. SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5 – RU996x2)**

FCC ID: BCGA2899 IC: 579C-A2899	 <b>element</b> MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1C2311270066-27-R4.BCG	Test Dates: 11/29/2023 - 04/05/2024	EUT Type: Tablet Device		Page 582 of 607

Worst Case Mode: 802.11ax  
 Worst Case Transfer Rate: MCS11  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 6985MHz  
 Channel: 207

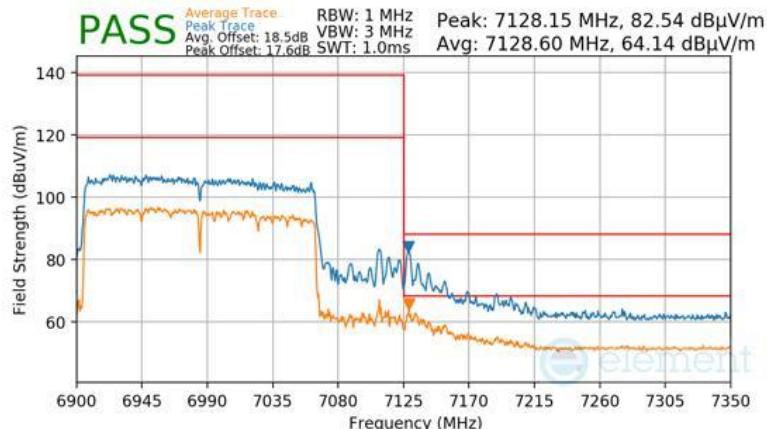

**Plot 7-1808. SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8 – RU996x2)**

FCC ID: BCGA2899 IC: 579C-A2899	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Technical Manager
Test Report S/N: 1C2311270066-27-R4.BCG	Test Dates: 11/29/2023 - 04/05/2024	EUT Type: Tablet Device	Page 583 of 607	

## 7.8 Radiated Spurious Emissions – Below 1GHz

§15.209; RSS-Gen [8.9]

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

***All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-279 per Section 15.209 and RSS-Gen (8.9).***

Frequency	Field Strength [ $\mu$ V/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

**Table 7-279. Radiated Limits**

### Test Procedures Used

ANSI C63.10-2013

### Test Settings

#### Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize


#### Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = quasi-peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize


FCC ID: BCGA2899 IC: 579C-A2899	element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270066-27-R4.BCG	Test Dates: 11/29/2023 - 04/05/2024	EUT Type: Tablet Device	Page 584 of 607	

### Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

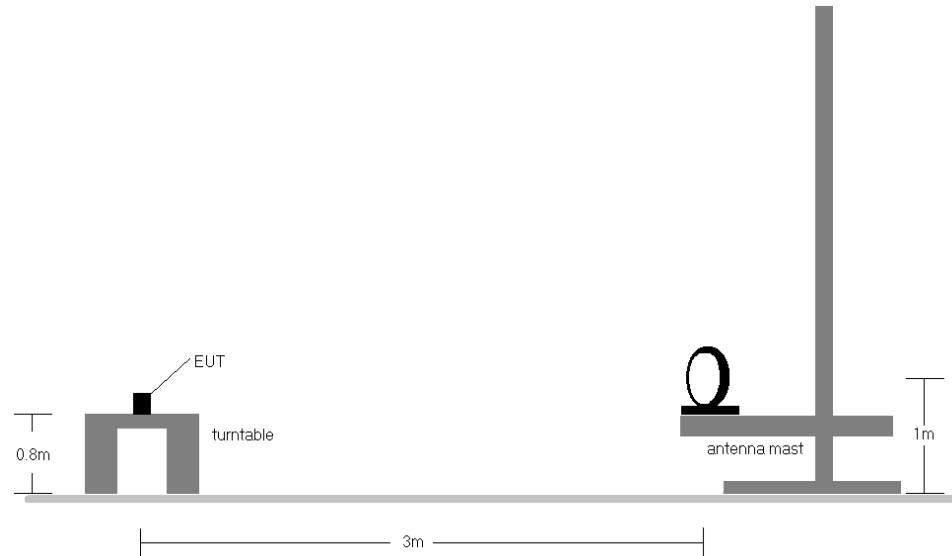

**Figure 7-5. Radiated Test Setup < 30MHz**

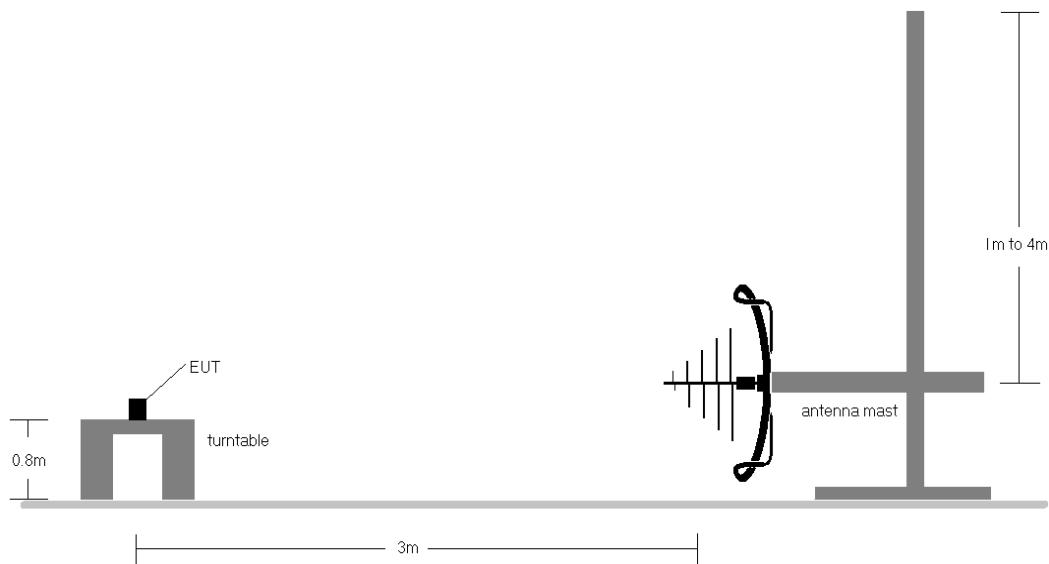

**Figure 7-6. Radiated Test Setup < 1GHz**

FCC ID: BCGA2899 IC: 579C-A2899	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270066-27-R4.BCG	Test Dates: 11/29/2023 - 04/05/2024	EUT Type: Tablet Device	Page 585 of 607

## Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-279.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector on emissions that were within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. Both configurations below were investigated, and the worst case has been reported.
  - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
  - b. EUT powered by host PC via USB-C cable with wire charger
10. All antenna configurations were investigated and only the worst case is reported.
11. The unit was tested with all possible modes and only the highest emission is reported.

## Sample Calculations


### Determining Spurious Emissions Levels

- Field Strength Level  $[\text{dB}_{\mu\text{V/m}}]$  = Analyzer Level  $[\text{dBm}] + 107 + \text{AFCL} [\text{dB/m}]$
- AFCL  $[\text{dB/m}]$  = Antenna Factor  $[\text{dB/m}] + \text{Cable Loss} [\text{dB}] - \text{Preamp Gain} [\text{dB}]$
- Margin  $[\text{dB}]$  = Field Strength Level  $[\text{dB}_{\mu\text{V/m}}] - \text{Limit} [\text{dB}_{\mu\text{V/m}}]$

FCC ID: BCGA2899 IC: 579C-A2899	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270066-27-R4.BCG	Test Dates: 11/29/2023 - 04/05/2024	EUT Type: Tablet Device	Page 586 of 607 V 10.5 12/15/2021

### 7.8.1 SDM Primary Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

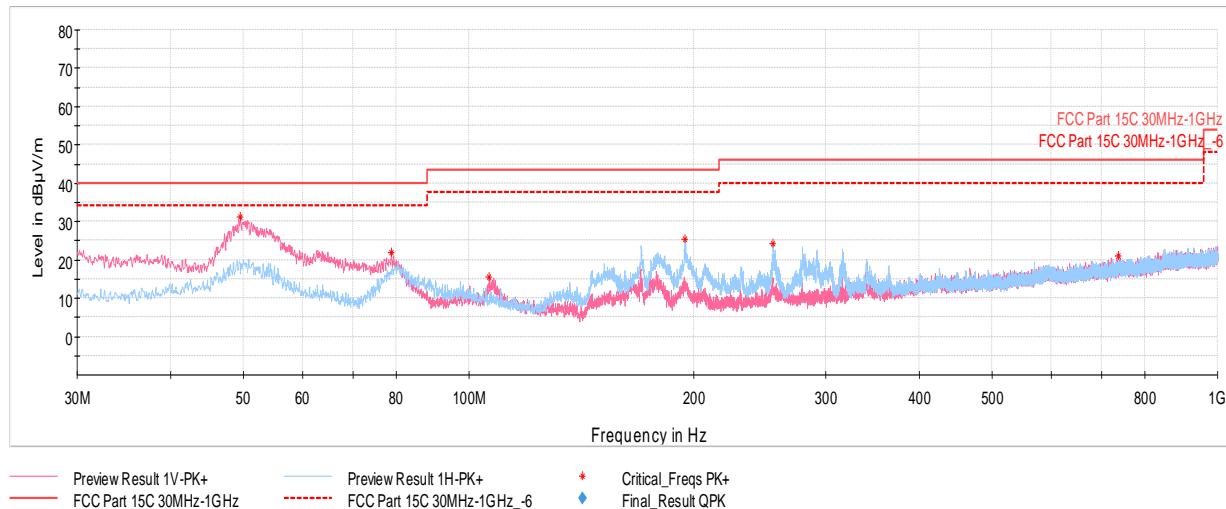


Plot 7-1809. Radiated Spurious Emissions below 1GHz SDM Primary (802.11ax – Ch.1 – RU26) with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
49.55	Max Peak	V	100	289	-63.29	-12.61	31.10	40.00	-8.90
78.84	Max Peak	V	300	22	-63.85	-21.29	21.86	40.00	-18.14
106.48	Max Peak	V	100	71	-74.82	-16.52	15.66	43.52	-27.86
194.37	Max Peak	V	100	301	-65.16	-16.51	25.33	43.52	-18.19
255.04	Max Peak	H	100	236	-68.00	-14.80	24.20	46.02	-21.82
737.47	Max Peak	V	100	132	-80.17	-5.65	21.18	46.02	-24.84

Table 7-280. Radiated Spurious Emissions below 1GHz SDM Primary (802.11ax – Ch.1 – RU26) with AC/DC Adapter

FCC ID: BCGA2899 IC: 579C-A2899	 <b>element</b> <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Technical Manager
Test Report S/N: 1C2311270066-27-R4.BCG	Test Dates: 11/29/2023 - 04/05/2024	EUT Type: Tablet Device		Page 587 of 607

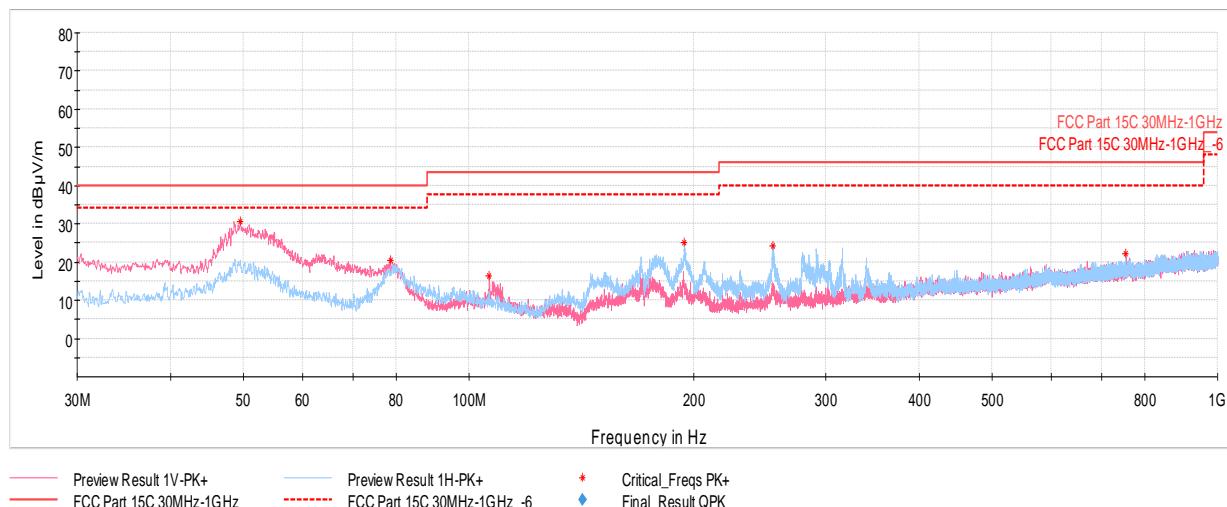

**Plot 7-1810. Radiated Spurious Emissions below 1GHz SDM Primary (802.11ax – Ch.1 – RU242) with AC/DC Adapter**


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
49.55	Max Peak	V	100	355	-63.61	-12.61	30.78	40.00	-9.22
78.60	Max Peak	V	100	104	-65.29	-21.25	20.46	40.00	-19.54
106.48	Max Peak	V	100	117	-74.18	-16.52	16.30	43.52	-27.22
194.17	Max Peak	H	100	189	-65.43	-16.53	25.04	43.52	-18.48
254.65	Max Peak	H	100	236	-67.81	-14.86	24.33	46.02	-21.69
752.89	Max Peak	H	100	275	-79.25	-5.51	22.24	46.02	-23.78

**Table 7-281. Radiated Spurious Emissions below 1GHz SDM Primary (802.11ax – Ch.1 – RU242) with AC/DC Adapter**

FCC ID: BCGA2899 IC: 579C-A2899	 <b>element</b> <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Technical Manager
Test Report S/N: 1C2311270066-27-R4.BCG	Test Dates: 11/29/2023 - 04/05/2024	EUT Type: Tablet Device	Page 588 of 607	

## 7.8.2 SDM Diversity Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

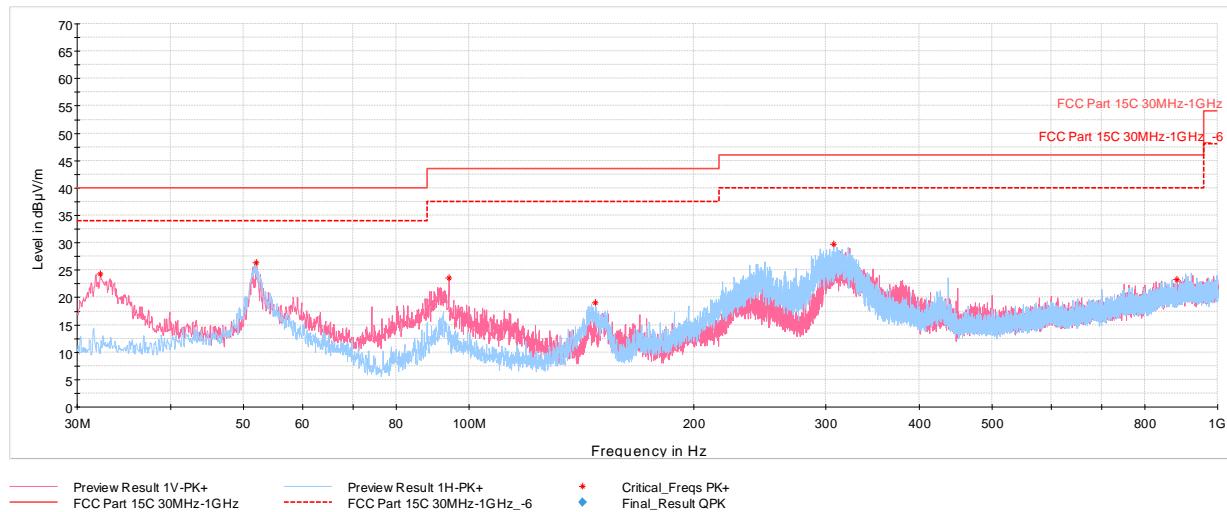


Plot 7-1811. Radiated Spurious Emissions below 1GHz SDM Diversity (802.11ax – Ch.1 – RU26) with Laptop

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
32.23	Max Peak	V	100	57	-66.65	-16.08	24.27	40.00	-15.73
52.07	Max Peak	V	100	159	-67.53	-13.15	26.32	40.00	-13.68
94.07	Max Peak	V	100	159	-66.00	-17.49	23.51	43.52	-20.01
147.52	Max Peak	H	300	0	-67.67	-20.36	18.97	43.52	-24.55
307.23	Max Peak	H	100	135	-62.90	-14.30	29.80	46.02	-16.22
881.27	Max Peak	V	200	153	-80.68	-3.05	23.27	46.02	-22.75

Table 7-282. Radiated Spurious Emissions below 1GHz SDM Diversity (802.11ax – Ch.1 – RU26) with Laptop

FCC ID: BCGA2899 IC: 579C-A2899	 <b>element</b> <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Technical Manager
Test Report S/N: 1C2311270066-27-R4.BCG	Test Dates: 11/29/2023 - 04/05/2024	EUT Type: Tablet Device	Page 589 of 607	

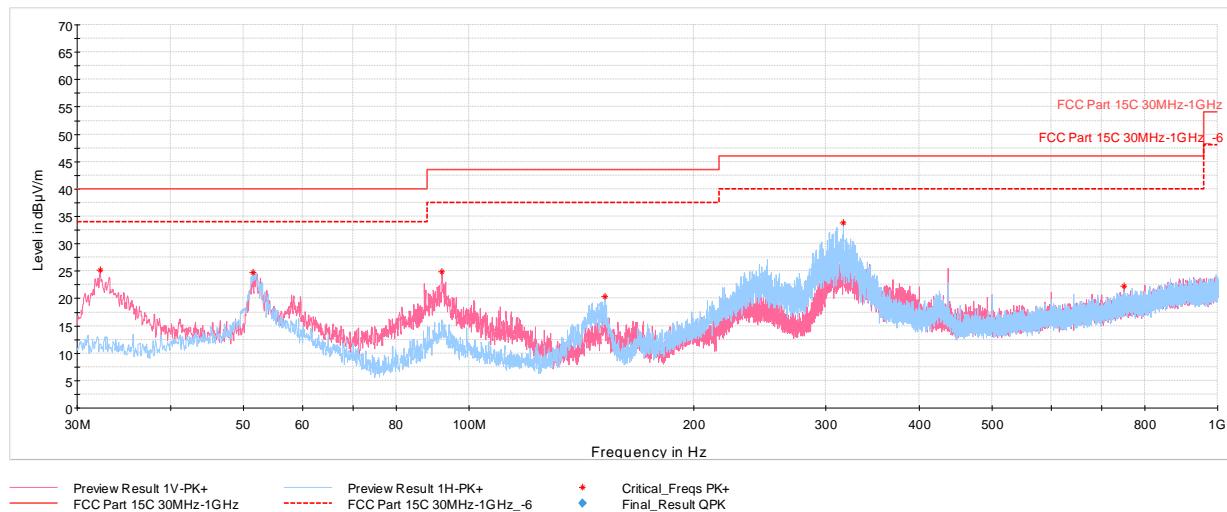

**Plot 7-1812. Radiated Spurious Emissions below 1GHz SDM Diversity (802.11ax – Ch.1 – RU242) with Laptop**

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
32.18	Max Peak	V	100	46	-65.75	-16.09	25.16	40.00	-14.84
51.53	Max Peak	H	200	211	-69.09	-13.12	24.79	40.00	-15.21
92.13	Max Peak	V	100	179	-64.39	-17.76	24.85	43.52	-18.67
152.03	Max Peak	H	200	0	-66.55	-20.11	20.34	43.52	-23.18
316.59	Max Peak	H	100	99	-59.21	-13.94	33.85	46.02	-12.17
749.35	Max Peak	V	200	211	-79.57	-5.20	22.23	46.02	-23.79

**Table 7-283. Radiated Spurious Emissions below 1GHz SDM Diversity (802.11ax – Ch.1 – RU242) with Laptop**

FCC ID: BCGA2899 IC: 579C-A2899	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270066-27-R4.BCG	Test Dates: 11/29/2023 - 04/05/2024	EUT Type: Tablet Device	Page 590 of 607

## 7.9 AC Line-Conducted Emissions Measurement

§15.407; RSS-Gen [8.8]

### Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

***All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).***

Frequency of emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

**Table 7-284. Conducted Limits**

\*Decreases with the logarithm of the frequency.

### Test Procedures Used

ANSI C63.10-2013, Section 6.2

### Test Settings

#### Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize


#### Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA2899 IC: 579C-A2899	element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270066-27-R4.BCG	Test Dates: 11/29/2023 - 04/05/2024	EUT Type: Tablet Device	Page 591 of 607	

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

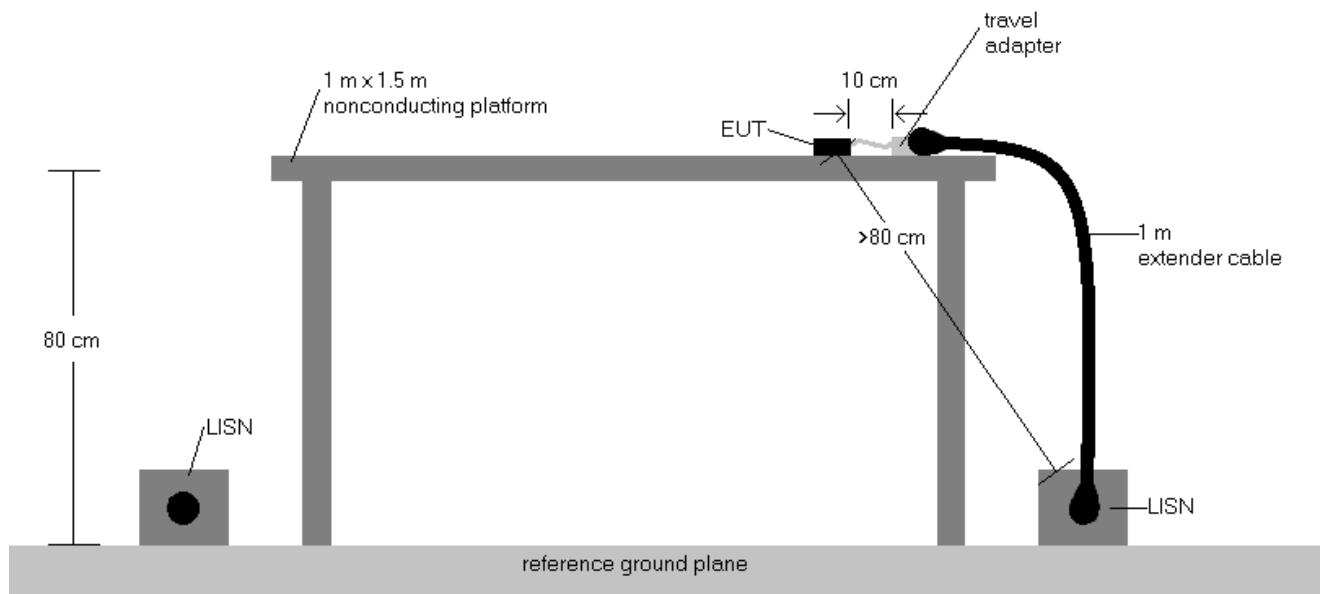


**Figure 7-7. Test Instrument & Measurement Setup**

## Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. Both configurations below were investigated, and the worst case has been reported.
  - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
  - b. EUT powered by host PC via USB-C cable with wire charger
3. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207 and RSS-Gen (8.8).
4. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
5. QP/AV Level (dB $\mu$ V) = QP/AV Analyzer/Receiver Level (dB $\mu$ V) + Correction Factor (dB)
6. Margin (dB) = QP/AV Level (dB $\mu$ V) - QP/AV Limit (dB $\mu$ V)
7. Traces shown in plots are made using quasi-peak and average detectors.
8. Deviations to the Specifications: None.
9. The unit was tested with all possible modes and only the highest emission is reported.

FCC ID: BCGA2899 IC: 579C-A2899	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270066-27-R4.BCG	Test Dates: 11/29/2023 - 04/05/2024	EUT Type: Tablet Device	Page 592 of 607

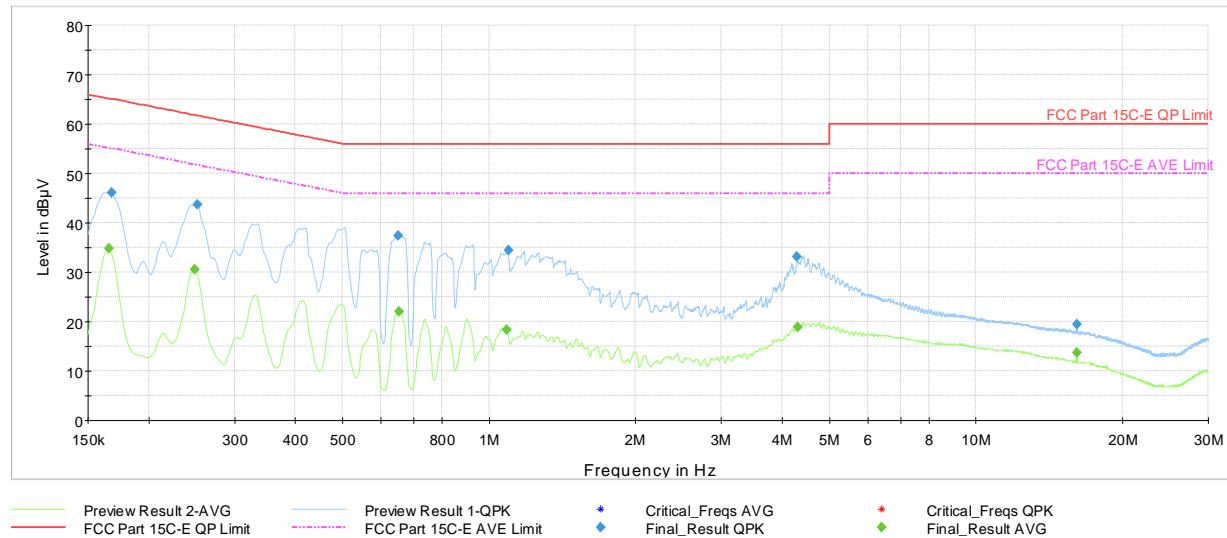


**Plot 7-1813. AC Line Conducted Plot with SDM Primary 11ax UNII Band 5 – RU26 – Ch.1 (L1) with AC/DC Adapter**

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.166	FINAL	—	34.76	55.17	-20.41	L1	GND
0.168	FINAL	46.0	—	65.06	-19.02	L1	GND
0.249	FINAL	—	30.58	51.79	-21.21	L1	GND
0.251	FINAL	43.7	—	61.72	-17.98	L1	GND
0.652	FINAL	37.3	—	56.00	-18.68	L1	GND
0.654	FINAL	—	21.99	46.00	-24.01	L1	GND
1.088	FINAL	—	18.30	46.00	-27.70	L1	GND
1.095	FINAL	34.4	—	56.00	-21.58	L1	GND
4.295	FINAL	33.1	—	56.00	-22.88	L1	GND
4.297	FINAL	—	18.80	46.00	-27.20	L1	GND
16.118	FINAL	—	13.69	50.00	-36.31	L1	GND
16.118	FINAL	19.5	—	60.00	-40.53	L1	GND

**Table 7-285. AC Line Conducted Data with SDM Primary 11ax UNII Band 5 – RU26 – Ch.1 (L1) with AC/DC Adapter**

FCC ID: BCGA2899 IC: 579C-A2899	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270066-27-R4.BCG	Test Dates: 11/29/2023 - 04/05/2024	EUT Type: Tablet Device	Page 593 of 607

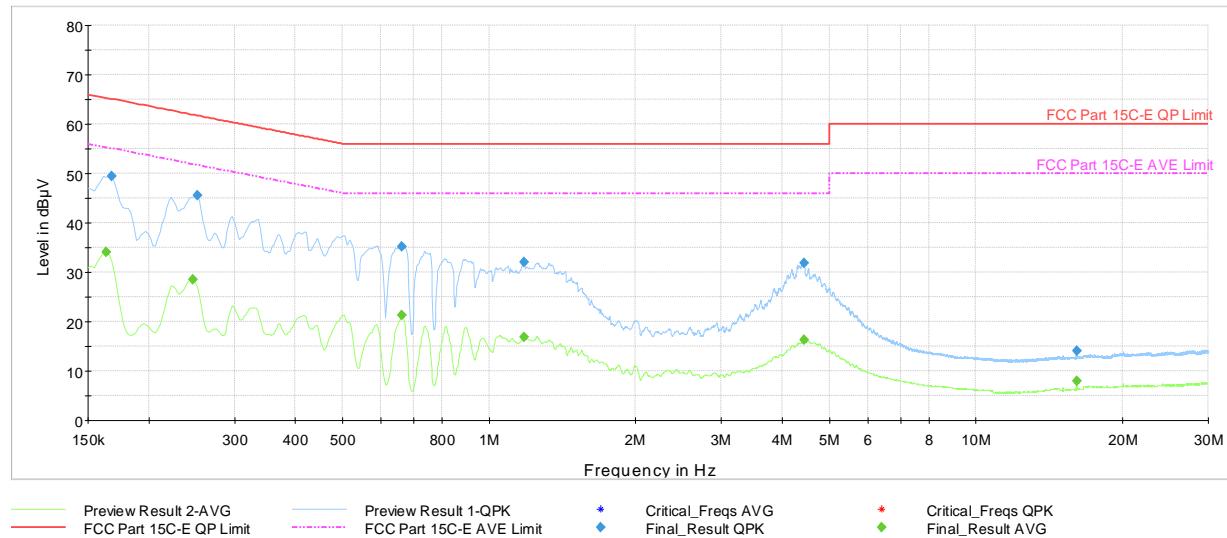


**Plot 7-1814. AC Line Conducted Plot with SDM Primary 11ax UNII Band 5 – RU26 – Ch.1 (N) with AC/DC Adapter**

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.164	FINAL	—	34.05	55.28	-21.23	N	GND
0.168	FINAL	49.4	—	65.06	-15.68	N	GND
0.247	FINAL	—	28.45	51.87	-23.42	N	GND
0.251	FINAL	45.5	—	61.72	-16.23	N	GND
0.663	FINAL	—	21.22	46.00	-24.78	N	GND
0.663	FINAL	35.2	—	56.00	-20.81	N	GND
1.178	FINAL	—	16.88	46.00	-29.12	N	GND
1.181	FINAL	32.1	—	56.00	-23.89	N	GND
4.427	FINAL	31.9	—	56.00	-24.15	N	GND
4.427	FINAL	—	16.34	46.00	-29.66	N	GND
16.109	FINAL	—	7.95	50.00	-42.05	N	GND
16.109	FINAL	14.0	—	60.00	-45.97	N	GND

**Table 7-286. AC Line Conducted Data with SDM Primary 11ax UNII Band 5 – RU26 – Ch.1 (N) with AC/DC Adapter**

FCC ID: BCGA2899 IC: 579C-A2899	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270066-27-R4.BCG	Test Dates: 11/29/2023 - 04/05/2024	EUT Type: Tablet Device	Page 594 of 607

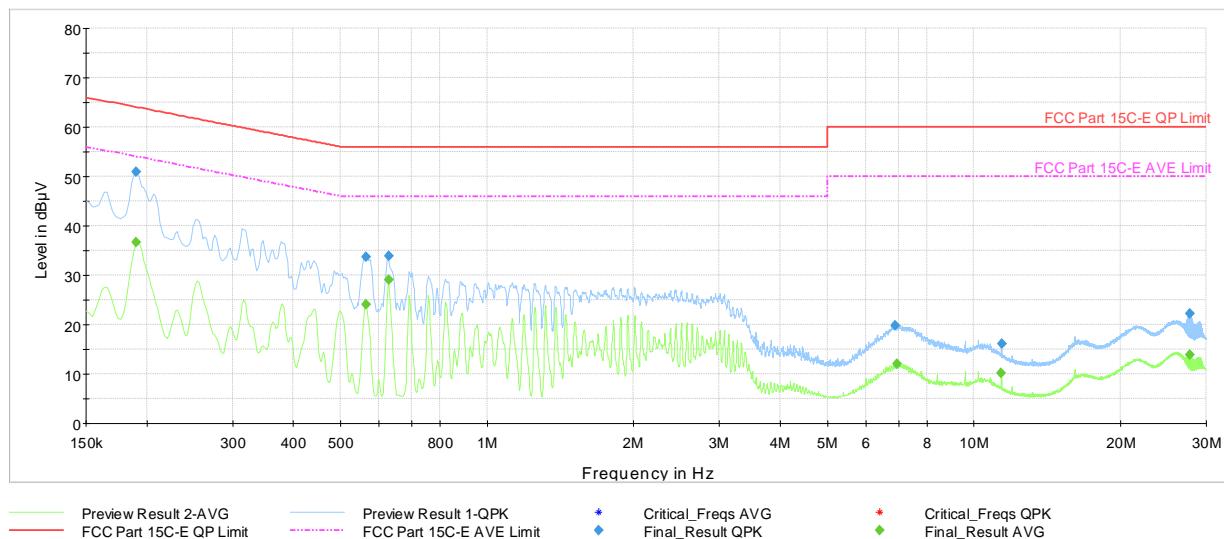


**Plot 7-1815. AC Line Conducted Plot with SDM Primary 11ax UNII Band 5 – RU242 – Ch.1 (L1) with Laptop**

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.191	FINAL	—	36.75	54.02	-17.26	L1	GND
0.191	FINAL	50.9	—	64.02	-13.11	L1	GND
0.564	FINAL	—	24.05	46.00	-21.95	L1	GND
0.564	FINAL	33.8	—	56.00	-22.23	L1	GND
0.627	FINAL	—	29.00	46.00	-17.00	L1	GND
0.627	FINAL	33.8	—	56.00	-22.16	L1	GND
6.875	FINAL	19.7	—	60.00	-40.27	L1	GND
6.952	FINAL	—	11.96	50.00	-38.04	L1	GND
11.387	FINAL	—	10.12	50.00	-39.88	L1	GND
11.389	FINAL	16.1	—	60.00	-43.95	L1	GND
27.805	FINAL	—	13.94	50.00	-36.06	L1	GND
27.805	FINAL	22.2	—	60.00	-37.82	L1	GND

**Table 7-287. AC Line Conducted Data with SDM Primary 11ax UNII Band 5 – RU242 – Ch.1 (L1) with Laptop**

FCC ID: BCGA2899 IC: 579C-A2899	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270066-27-R4.BCG	Test Dates: 11/29/2023 - 04/05/2024	EUT Type: Tablet Device	Page 595 of 607

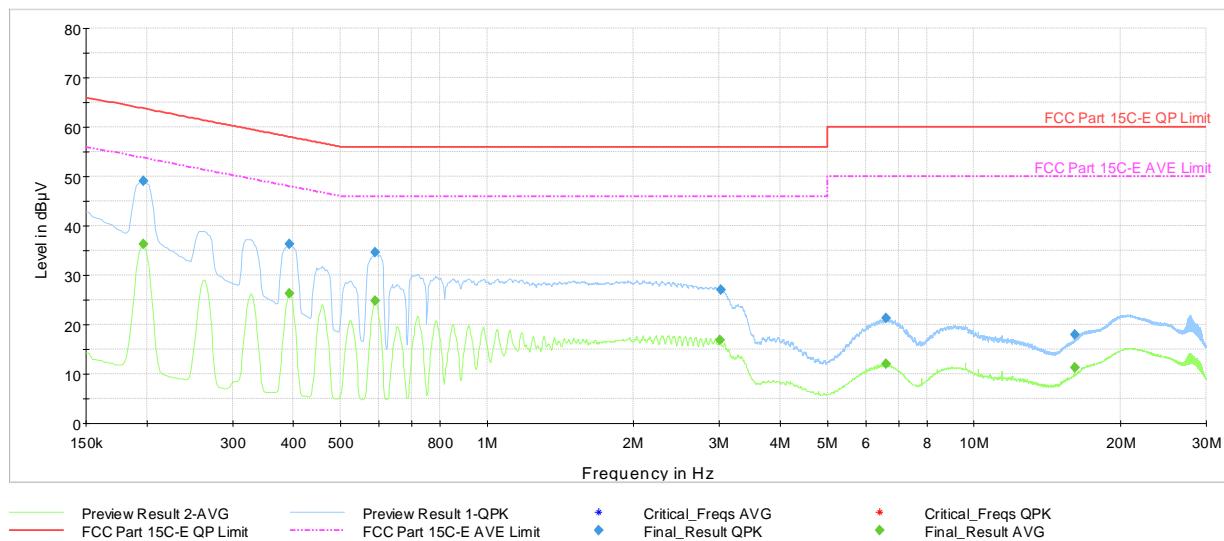


**Plot 7-1816. AC Line Conducted Plot with SDM Primary 11ax UNII Band 5 – RU242 – Ch.1 (N) with Laptop**

Frequency [MHz]	Process State	QuasiPeak [dB $\mu$ V]	Average [dB $\mu$ V]	Limit [dB $\mu$ V]	Margin [dB]	Line	PE
0.197	FINAL	—	36.32	53.73	-17.41	N	GND
0.197	FINAL	49.1	—	63.73	-14.63	N	GND
0.393	FINAL	—	26.35	48.00	-21.65	N	GND
0.393	FINAL	36.4	—	58.00	-21.64	N	GND
0.589	FINAL	34.6	—	56.00	-21.44	N	GND
0.589	FINAL	—	24.75	46.00	-21.25	N	GND
3.005	FINAL	—	16.77	46.00	-29.23	N	GND
3.017	FINAL	27.0	—	56.00	-29.00	N	GND
6.596	FINAL	—	12.05	50.00	-37.95	N	GND
6.608	FINAL	21.2	—	60.00	-38.79	N	GND
16.087	FINAL	—	11.38	50.00	-38.62	N	GND
16.087	FINAL	17.9	—	60.00	-42.13	N	GND

**Table 7-288. AC Line Conducted Data with SDM Primary 11ax UNII Band 5 – RU242 – Ch.1 (N) with Laptop**

FCC ID: BCGA2899 IC: 579C-A2899	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270066-27-R4.BCG	Test Dates: 11/29/2023 - 04/05/2024	EUT Type: Tablet Device	Page 596 of 607

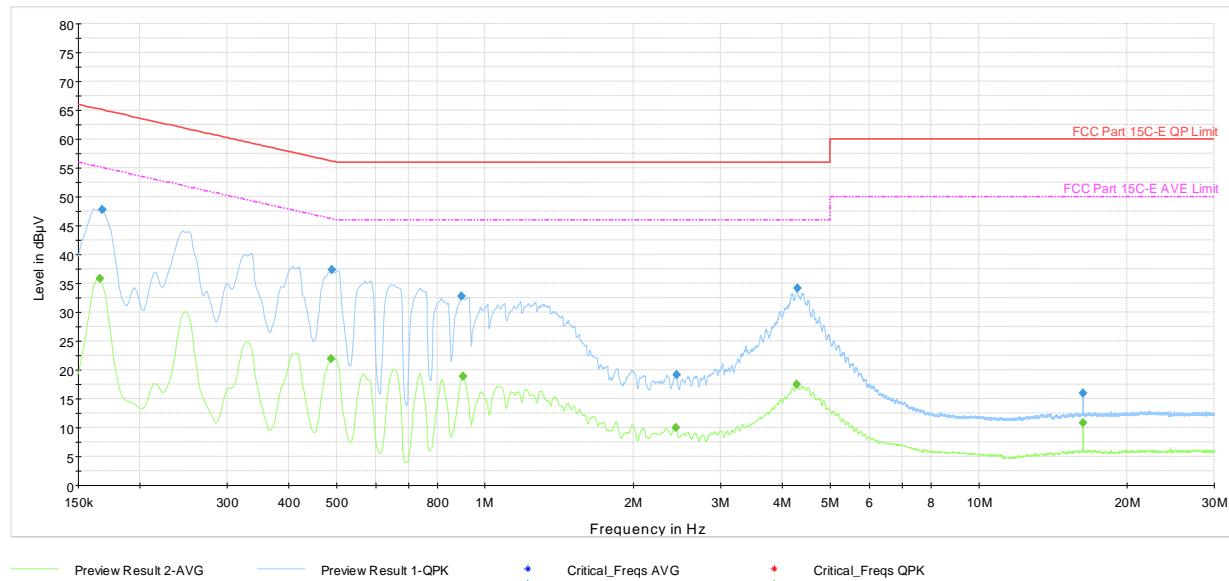


**Plot 7-1817. AC Line Conducted Plot with SDM Diversity 11ax UNII Band 5 – RU26 – Ch.1 (L1) with AC/DC Adapter**

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.166	FINAL	—	35.83	55.17	-19.34	L1	GND
0.168	FINAL	47.7	—	65.06	-17.34	L1	GND
0.488	FINAL	—	21.94	46.21	-24.27	L1	GND
0.490	FINAL	37.3	—	56.17	-18.85	L1	GND
0.897	FINAL	32.8	—	56.00	-23.24	L1	GND
0.902	FINAL	—	18.82	46.00	-27.18	L1	GND
2.432	FINAL	—	10.06	46.00	-35.94	L1	GND
2.443	FINAL	19.2	—	56.00	-36.80	L1	GND
4.279	FINAL	—	17.51	46.00	-28.49	L1	GND
4.292	FINAL	34.1	—	56.00	-21.90	L1	GND
16.274	FINAL	—	10.90	50.00	-39.10	L1	GND
16.274	FINAL	16.0	—	60.00	-43.99	L1	GND

**Table 7-289. AC Line Conducted Data with SDM Diversity 11ax UNII Band 5 – RU26 – Ch.1 (L1) with AC/DC Adapter**

FCC ID: BCGA2899 IC: 579C-A2899	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270066-27-R4.BCG	Test Dates: 11/29/2023 - 04/05/2024	EUT Type: Tablet Device	Page 597 of 607

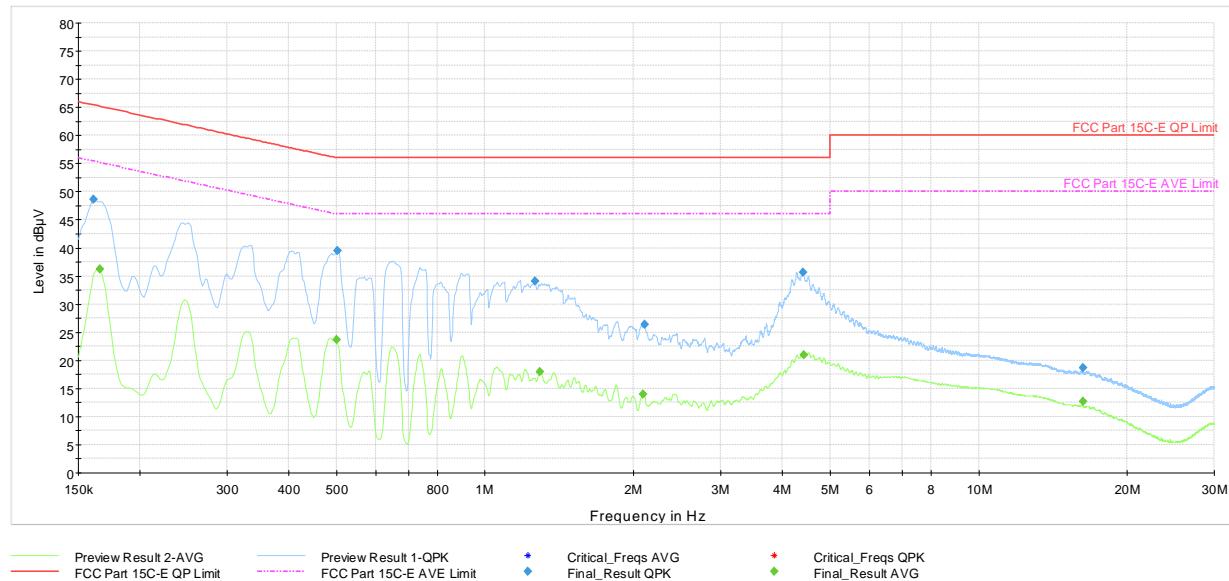


**Plot 7-1818. AC Line Conducted Plot with SDM Diversity 11ax UNII Band 5 – RU26 – Ch.1 (N) with AC/DC Adapter**

Frequency [MHz]	Process State	QuasiPeak [dB $\mu$ V]	Average [dB $\mu$ V]	Limit [dB $\mu$ V]	Margin [dB]	Line	PE
0.161	FINAL	48.6	—	65.40	-16.80	N	GND
0.166	FINAL	—	36.18	55.17	-18.99	N	GND
0.501	FINAL	—	23.68	46.00	-22.32	N	GND
0.503	FINAL	39.5	—	56.00	-16.55	N	GND
1.264	FINAL	34.1	—	56.00	-21.92	N	GND
1.291	FINAL	—	17.99	46.00	-28.01	N	GND
2.092	FINAL	—	13.97	46.00	-32.03	N	GND
2.108	FINAL	26.3	—	56.00	-29.67	N	GND
4.407	FINAL	35.6	—	56.00	-20.36	N	GND
4.427	FINAL	—	21.03	46.00	-24.97	N	GND
16.278	FINAL	—	12.72	50.00	-37.28	N	GND
16.278	FINAL	18.7	—	60.00	-41.29	N	GND

**Table 7-290. AC Line Conducted Data with SDM Diversity 11ax UNII Band 5 – RU26 – Ch.1 (N) with AC/DC Adapter**

FCC ID: BCGA2899 IC: 579C-A2899	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270066-27-R4.BCG	Test Dates: 11/29/2023 - 04/05/2024	EUT Type: Tablet Device	Page 598 of 607

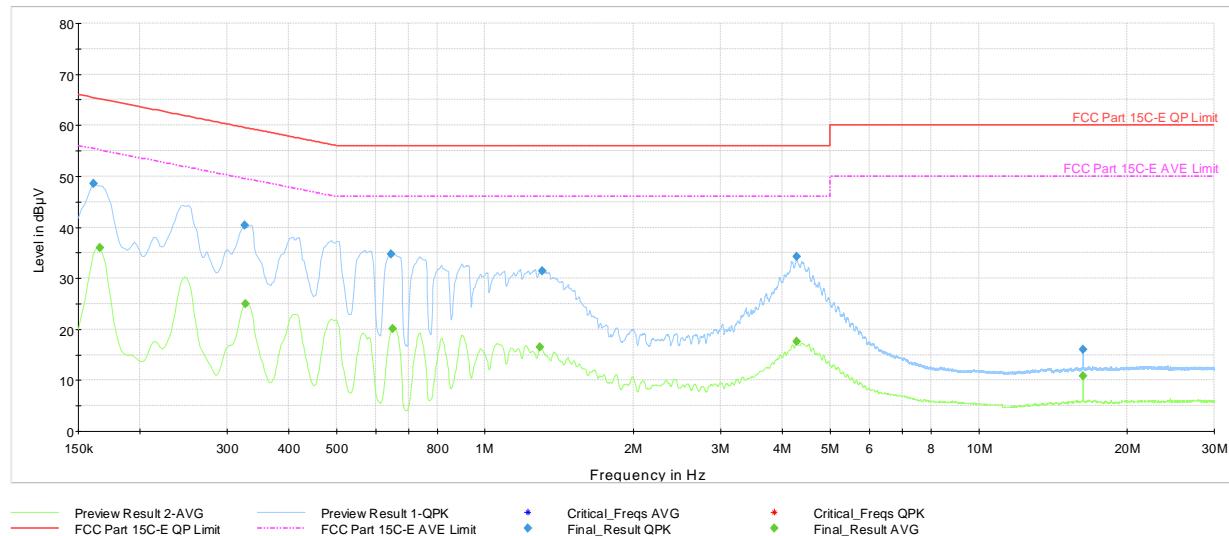


**Plot 7-1819. AC Line Conducted Plot with SDM Diversity 11ax UNII Band 5 – RU242 – Ch.1 (L1) with Laptop**

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.161	FINAL	48.5	—	65.40	-16.91	L1	GND
0.166	FINAL	—	35.99	55.17	-19.18	L1	GND
0.326	FINAL	40.3	—	59.57	-19.24	L1	GND
0.328	FINAL	—	24.92	49.51	-24.59	L1	GND
0.645	FINAL	34.8	—	56.00	-21.19	L1	GND
0.650	FINAL	—	20.06	46.00	-25.94	L1	GND
1.291	FINAL	—	16.46	46.00	-29.54	L1	GND
1.307	FINAL	31.5	—	56.00	-24.52	L1	GND
4.274	FINAL	—	17.60	46.00	-28.40	L1	GND
4.281	FINAL	34.3	—	56.00	-21.74	L1	GND
16.276	FINAL	—	10.92	50.00	-39.08	L1	GND
16.276	FINAL	16.0	—	60.00	-43.99	L1	GND

**Table 7-291. AC Line Conducted Data with SDM Diversity 11ax UNII Band 5 – RU242 – Ch.1 (L1) with Laptop**

FCC ID: BCGA2899 IC: 579C-A2899	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Technical Manager
Test Report S/N: 1C2311270066-27-R4.BCG	Test Dates: 11/29/2023 - 04/05/2024	EUT Type: Tablet Device	Page 599 of 607	

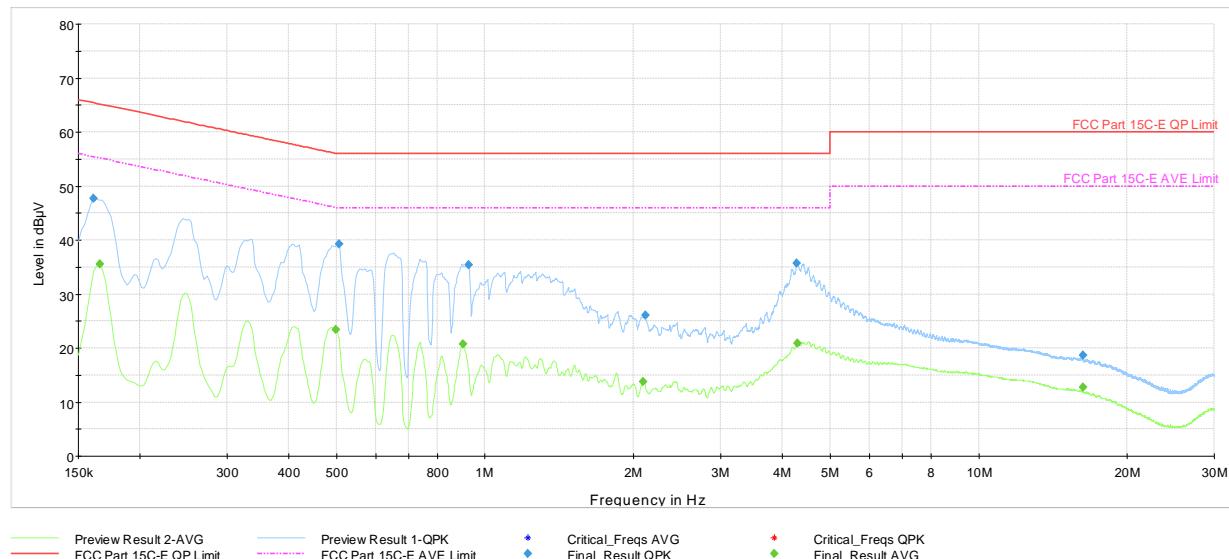

**Plot 7-1820. AC Line Conducted Plot with SDM Diversity 11ax UNII Band 5 – RU242 – Ch.1 (N) with Laptop**

Frequency [MHz]	Process State	QuasiPeak [dB $\mu$ V]	Average [dB $\mu$ V]	Limit [dB $\mu$ V]	Margin [dB]	Line	PE
0.161	FINAL	47.7	—	65.40	-17.68	N	GND
0.166	FINAL	—	35.53	55.17	-19.64	N	GND
0.499	FINAL	—	23.36	46.02	-22.66	N	GND
0.506	FINAL	39.3	—	56.00	-16.69	N	GND
0.902	FINAL	—	20.81	46.00	-25.19	N	GND
0.926	FINAL	35.5	—	56.00	-20.52	N	GND
2.092	FINAL	—	13.84	46.00	-32.16	N	GND
2.110	FINAL	26.0	—	56.00	-29.97	N	GND
4.286	FINAL	35.8	—	56.00	-20.24	N	GND
4.297	FINAL	—	20.93	46.00	-25.07	N	GND
16.283	FINAL	—	12.68	50.00	-37.32	N	GND
16.283	FINAL	18.7	—	60.00	-41.35	N	GND

**Table 7-292. AC Line Conducted Data with SDM Diversity 11ax UNII Band 5 – RU242 – Ch.1 (N) with Laptop**

FCC ID: BCGA2899 IC: 579C-A2899	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1C2311270066-27-R4.BCG	Test Dates: 11/29/2023 - 04/05/2024	EUT Type: Tablet Device	Page 600 of 607	

## 7.10 Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point

§15.407; RSS-248

### Test Overview and Limits

A client device that connects to a Standard Power AP must limit its power to a minimum of 6 dB lower than its associated Standard Power access point's authorized transmit power. The term "authorized" means the AFC-approved power level for the AP to use on a particular channel.

### Test Procedure Used

KDB 987594 D02 v02r01 – Section L

ANSI C63.10-2013 – Section 12.3.3.2 Method PM-G


ANSI C63.10-2013 – Section 14.2 Measure-and-Sum Technique

### Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

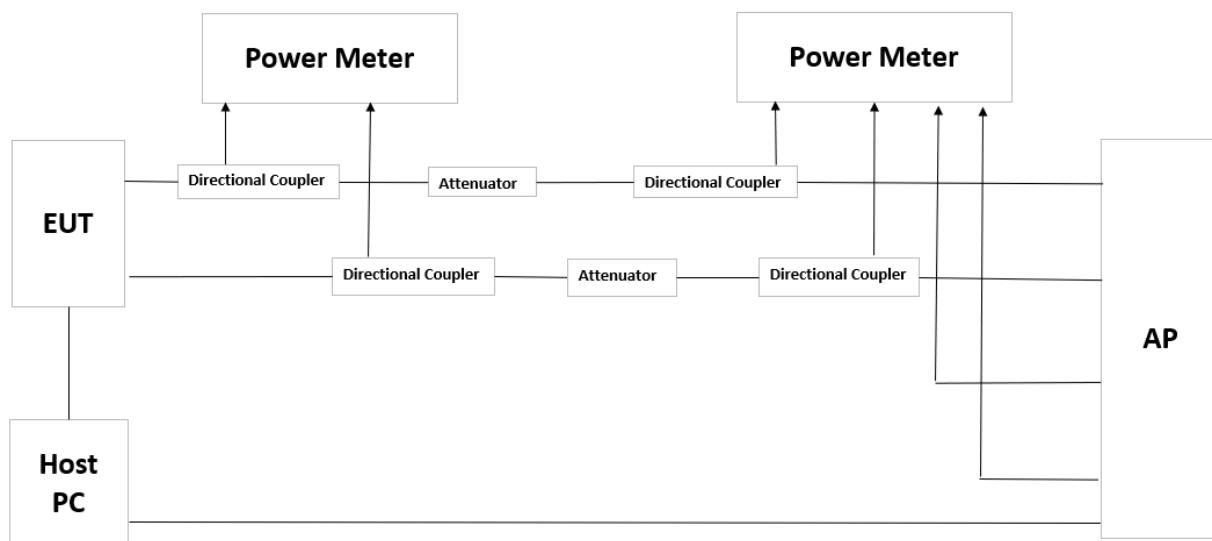

**Figure 7-8. Test Instrument & Measurement Setup**

### Test Notes

1. AFC Limit was set to 36, 28 and 21 dBm EIRP.
2. Standard Power AP which was used in the test setup is not certified and it's a production version.
3. Standard Power AP specification is declared by Apple/manufacturer.

FCC ID: BCGA2899 IC: 579C-A2899	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270066-27-R4.BCG	Test Dates: 11/29/2023 - 04/05/2024	EUT Type: Tablet Device	Page 601 of 607 V 10.5 12/15/2021

## 36 dBm EIRP

Channel	Frequency (MHz)	Mode	Power Measured (dBm)					Correlated Gain (dBi)	Measured e.i.r.p (dBm)
			Ant0	Ant1	Ant2	Ant3	Summed		
5	5975	TxBF	19.75	19.86	19.72	19.37	25.7	6.02	31.72

Table 7-293: AP measured e.i.r.p

Channel	Frequency (MHz)	Power Measured (dBm)			Correlated Gain (dBi)	Measured e.i.r.p (dBm)
		Antenna 5T	Antenna 3b	Summed		
5	5975	14.09	9.44	15.37	3.0	18.37

Table 7-294: EUT measured e.i.r.p (MIMO)

FCC ID: BCGA2899 IC: 579C-A2899	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270066-27-R4.BCG	Test Dates: 11/29/2023 - 04/05/2024	EUT Type: Tablet Device	Page 602 of 607

## 28 dBm EIRP

Channel	Frequency (MHz)	Mode	Power Measured (dBm)					Correlated Gain (dBi)	Measured e.i.r.p (dBm)
			Ant0	Ant1	Ant2	Ant3	Summed		
5	5975	CDD	19.59	19.96	19.54	19.30	25.62	0	25.62

Table 7-295: AP measured e.i.r.p

Channel	Frequency (MHz)	Power Measured (dBm)			Correlated Gain (dBi)	Measured e.i.r.p (dBm)
		Antenna 5T	Antenna 3b	Summed		
5	5975	13.18	9.39	14.7	3.0	17.7

Table 7-296: EUT measured e.i.r.p (MIMO)

FCC ID: BCGA2899 IC: 579C-A2899	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1C2311270066-27-R4.BCG	Test Dates: 11/29/2023 - 04/05/2024	EUT Type: Tablet Device		

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## 21 dBm EIRP

Channel	Frequency (MHz)	Mode	Power Measured (dBm)					Correlated Gain (dB)	Measured e.i.r.p (dBm)
			Ant0	Ant1	Ant2	Ant3	Summed		
5	5975	CDD	12.87	12.76	13.18	12.29	18.81	0	18.81

**Table 7-297: AP measured e.i.r.p**

Antenna	Channel	Frequency (MHz)	Power Measured (dBm)	Antenna Gain (dBi)	Measured e.i.r.p (dBm)
5T	5	5975	11.06	3.0	14.06
3b	5	5975	9.4	-0.2	9.2

**Table 7-298: EUT measured e.i.r.p (SISO)**

FCC ID: BCGA2899 IC: 579C-A2899	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270066-27-R4.BCG	Test Dates: 11/29/2023 - 04/05/2024	EUT Type: Tablet Device	Page 604 of 607

## 7.11 Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP §15.407

### Test Overview and Limits

A client device may connect to a Standard Power AP with a maximum power level of 30 dBm EIRP. A client may also connect to a Low Power indoor AP, but the power level is limited to a maximum of 24 dBm EIRP. If a client has the flexibility to connect to both APs, verification is needed to show that it can distinguish between the two configurations, and then control the power levels accordingly.

### Test Procedure Used

KDB 987594 D02 v02r01 – Section K

ANSI C63.10-2013 – Section 12.3.3.2 Method PM-G


ANSI C63.10-2013 – Section 14.2 Measure-and-Sum Technique

### Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

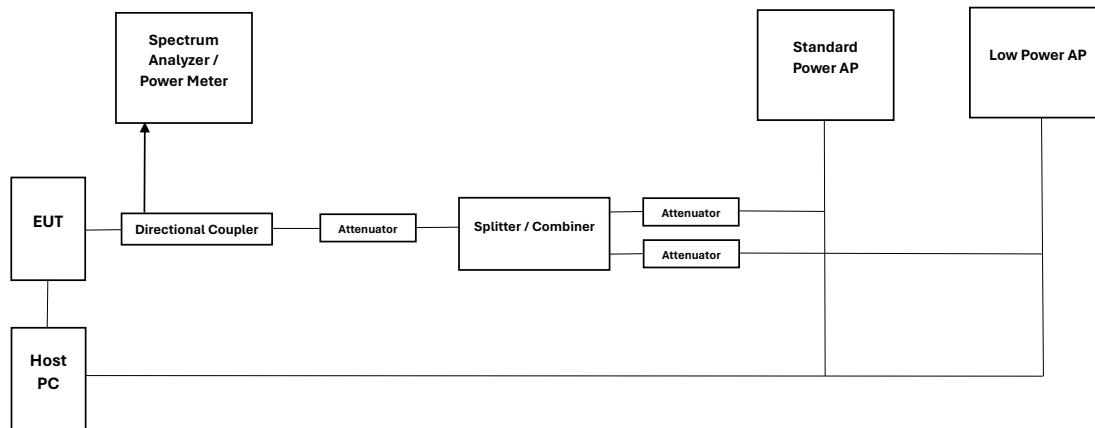


**Figure 7-9. Test Instrument & Measurement Setup**

### Test Notes

1. Standard Power AP was set on highest power setting (36dBm EIRP)
2. Standard Power AP and Low Power Indoor AP were configured to transmit on same channel.
3. DUT was configured for SISO transmission so Antenna 5T was measured.

FCC ID: BCGA2899 IC: 579C-A2899	element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270066-27-R4.BCG	Test Dates: 11/29/2023 - 04/05/2024	EUT Type: Tablet Device	Page 605 of 607	

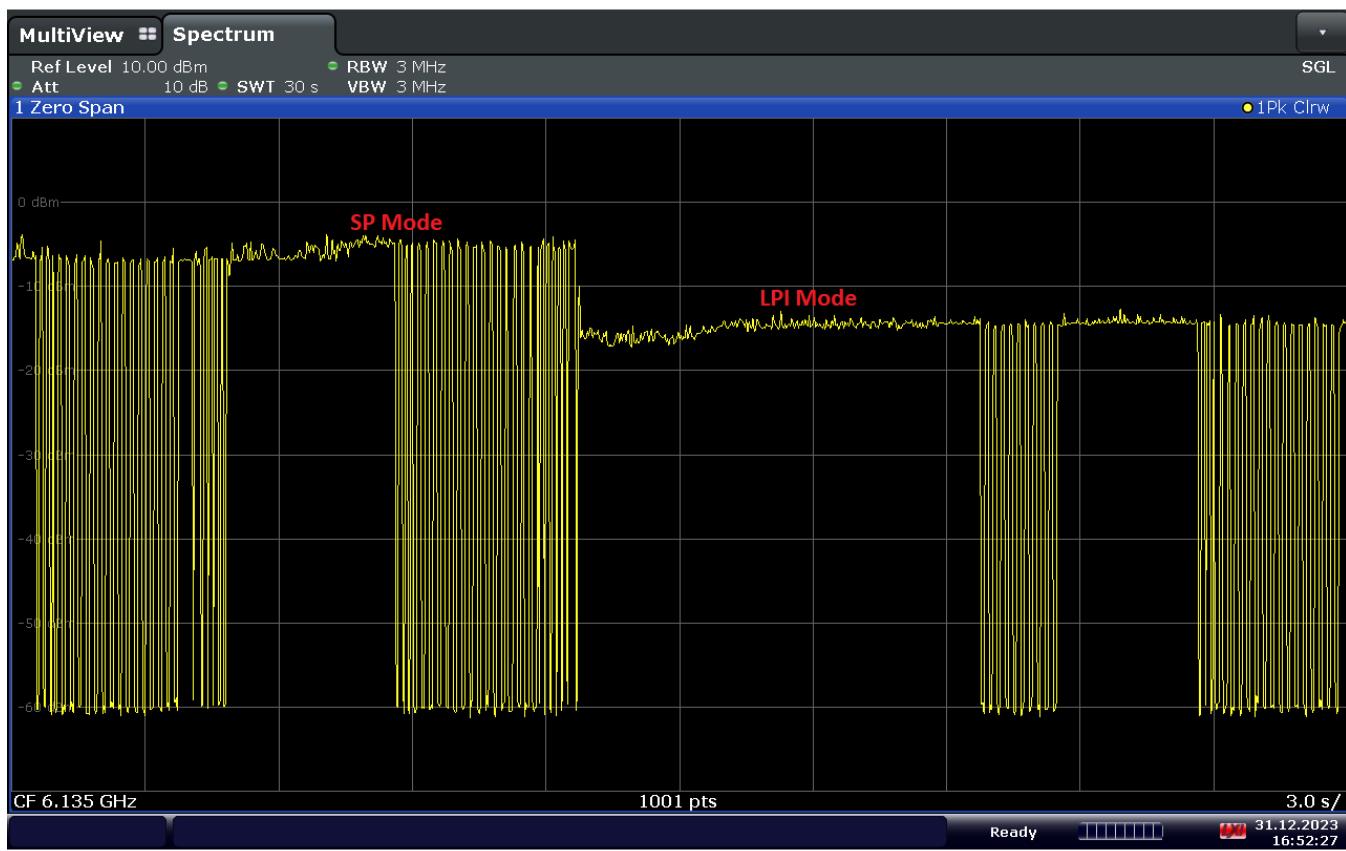

16:52:27 31.12.2023

Plot 7-1821. Client device observation from Standard Power AP to Low Power Indoor AP

Channel	Frequency (MHz)	Mode	Power Measured (dBm)					Correlated Gain (dB)	Measured e.i.r.p (dBm)
			Ant0	Ant1	Ant2	Ant3	Summed		
37	6135	TxBF	19.39	19.54	19.61	19.38	25.5	6.02	31.52

Table 7-299: Measured e.i.r.p from Standard Power AP

Antenna	Channel	Frequency (MHz)	Power Measured (dBm)	Antenna Gain (dB)	Measured e.i.r.p (dBm)
5T	37	6135	11.19	3.0	14.19

Table 7-300: EUT measured e.i.r.p when established with Standard Power AP

Antenna	Channel	Frequency (MHz)	Power Measured (dBm)	Antenna Gain (dB)	Measured e.i.r.p (dBm)
5T	37	6135	5.16	3.0	8.16

Table 7-301: EUT measured e.i.r.p when established with Low Power Indoor AP

FCC ID: BCGA2899 IC: 579C-A2899	e element MEASUREMENT REPORT (CERTIFICATION)				Approved by: Technical Manager
Test Report S/N: 1C2311270066-27-R4.BCG	Test Dates: 11/29/2023 - 04/05/2024	EUT Type: Tablet Device			Page 606 of 607

## 8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device** **FCC ID: BCGA2899** and **IC: 579C-A2899** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules and RSS-248 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA2899 IC: 579C-A2899	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270066-27-R4.BCG	Test Dates: 11/29/2023 - 04/05/2024	EUT Type: Tablet Device	Page 607 of 607