

TEST REPORT

Test Report No. : UL-RPT-RP14614880JD02C

Customer : Apple Inc.
Model No. / HVIN : A2918
PMN : MacBook Pro
FCC ID : BCGA2918
ISED Certification No. : IC: 579C-A2918
Technology : *Bluetooth – BDR & EDR (Low Power Mode)*
Test Standard(s) : FCC Parts 15.209(a) & 15.247
Innovation, Science and Economic Development Canada
RSS-247 Issue 2 February 2017
RSS-Gen Issue 5 February 2021
Test Laboratory : UL International (UK) Ltd, Basingstoke, Hampshire, RG24 8AH, United Kingdom

1. This test report shall not be reproduced except in full, without the written approval of UL International (UK) Ltd.
2. The results in this report apply only to the sample(s) tested.
3. The sample tested is in compliance with the above standard(s).
4. The test results in this report are traceable to the national or international standards.
5. Version 1.0.

Date of Issue: 05 June 2023

Checked by: 
Sarah Williams
RF Operations Leader, Radio Laboratory

Company Signatory: 
Ben Mercer
Lead Project Engineer, Radio Laboratory



The *Bluetooth*® word mark and logos are owned by the *Bluetooth* SIG, Inc. and any use of such marks by UL International (UK) Ltd is under licence. Other trademarks and trade names are those of their respective owners.

UL International (UK) LTD

Unit 1-3 Horizon, Kingsland Business Park, Wade Road, Basingstoke, Hampshire, RG24 8AH, UK
Telephone: +44 (0)1256 312000

Customer Information

Company Name:	Apple Inc.
Address:	One Apple Park Way Cupertino, California 95014 U.S.A.
Contact Name:	Stuart Thomas

Report Revision History

Version Number	Issue Date	Revision Details	Revised By
1.0	05/06/2023	Initial Version	Sarah Williams

Table of Contents

Customer Information	3
Report Revision History	3
Table of Contents	4
1 Attestation of Test Results	5
1.1 Description of EUT	5
1.2 General Information	5
1.3 Summary of Test Results	6
1.4 Deviations from the Test Specification	6
2 Summary of Testing	7
2.1 Facilities and Accreditation	7
2.2 Methods and Procedures	7
2.3 Calibration and Uncertainty	8
2.4 Test and Measurement Equipment	9
3 Equipment Under Test (EUT)	11
3.1 Identification of Equipment Under Test (EUT)	11
3.2 Modifications Incorporated in the EUT	11
3.3 Additional Information Related to Testing	12
3.4 Description of Available Antennas	12
3.5 Description of Test Setup	13
4 Antenna Port Test Results	20
4.1 Transmitter 99% Emission Bandwidth	20
4.2 Transmitter 20 dB Bandwidth	33
4.3 Transmitter Carrier Frequency Separation	46
4.4 Transmitter Number of Hopping Frequencies and Average Time of Occupancy	56
4.5 Transmitter Maximum Peak Output Power	60
5 Radiated Test Results	82
5.1 Transmitter Radiated Emissions <1 GHz	82
5.2 Transmitter Radiated Emissions >1 GHz	84
5.3 Transmitter Band Edge Radiated Emissions	86
Appendix 1	135
FHSS Duty Cycle Correction Factor Calculation	135

1 Attestation of Test Results

1.1 Description of EUT

The equipment under test was a portable laptop computer.

1.2 General Information

Specification Reference:	47CFR15.247
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart C (Intentional Radiators) – Section 15.247
Specification Reference:	47CFR15.209
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart C (Intentional Radiators) – Section 15.209
Specification Reference:	RSS-Gen Issue 5 February 2021
Specification Title:	General Requirements for Compliance of Radio Apparatus
Specification Reference:	RSS-247 Issue 2 February 2017
Specification Title:	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
Site Registration:	FCC: 685609, ISEDC: 20903
FCC Lab. Designation No.:	UK2011
ISEDC CABID:	UK0001
Location of Testing:	Unit 3 Horizon, Wade Road, Kingsland Business Park, Basingstoke, Hampshire, G24 8AH, United Kingdom
Test Dates:	16 March 2023 to 02 May 2023

1.3 Summary of Test Results

FCC Reference (47CFR)	ISED Canada Reference	Measurement	Result
N/A	RSS-Gen 6.7	Transmitter 99% Occupied Bandwidth	Complied
Part 15.247(a)(1)	RSS-Gen 6.7 / RSS-247 5.1(a)	Transmitter 20 dB Bandwidth	Complied
Part 15.247(a)(1)	RSS-247 5.1(b)	Transmitter Carrier Frequency Separation	Complied
Part 15.247(a)(1)(iii)	RSS-247 5.1(d)	Transmitter Number of Hopping Frequencies and Average Time of Occupancy	Complied
Part 15.247(b)(1)	RSS-Gen 6.12 / RSS-247 5.4(b)	Transmitter Maximum Peak Output Power	Complied
Part 15.247(d) & 15.209(a)	RSS-Gen 6.13 / RSS-247 5.5	Transmitter Radiated Emissions	Complied
Part 15.247(d) & 15.209(a)	RSS-Gen 6.13 / RSS-247 5.5	Transmitter Band Edge Radiated Emissions	Complied

1.4 Deviations from the Test Specification

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

2 Summary of Testing

2.1 Facilities and Accreditation

The test site and measurement facilities used to collect data are located at Unit 3 Horizon, Wade Road, Kingsland Business Park, Basingstoke, Hampshire, RG24 8AH, United Kingdom. The following table identifies which facilities were utilised for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

Site 1	X
Site 2	-
Site 17	X

UL International (UK) Ltd is accredited by the United Kingdom Accreditation Service (UKAS). UKAS is one of the signatories to the International Laboratory Accreditation Co-operation (ILAC) Arrangement for the mutual recognition of test reports. The tests reported herein have been performed in accordance with its terms of accreditation.

2.2 Methods and Procedures

Reference:	ANSI C63.10-2013
Title:	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
Reference:	KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019
Title:	Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating Under Section 15.247 of the FCC Rules
Reference:	KDB 662911 D01 Multiple Transmitter Output v02r01 October 31, 2013
Title:	Emissions Testing of Transmitters with Multiple Outputs in the Same Band

2.3 Calibration and Uncertainty

Measuring Instrument Calibration

In accordance with UKAS requirements all the measurement equipment is on a calibration schedule. All equipment was within the calibration period on the date of testing.

Measurement Uncertainty & Decision Rule

Overview

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

Decision Rule

The decision rule applied is based upon the accuracy method criteria. The measurement uncertainty is met and the result is considered in conformance with the requirement criteria if the observed value is within the prescribed limit.

Measurement Uncertainty

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document "approximately" is interpreted as meaning "effectively" or "for most practical purposes".

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
99% Occupied Bandwidth	2.4 GHz to 2.4835 GHz	95%	±3.92 %
20 dB Bandwidth	2.4 GHz to 2.4835 GHz	95%	±4.59 %
Carrier Frequency Separation	2.4 GHz to 2.4835 GHz	95%	±4.59 %
Average Time of Occupancy	2.4 GHz to 2.4835 GHz	95%	±3.53 ns
Conducted Maximum Peak Output Power	2.4 GHz to 2.4835 GHz	95%	±1.13 dB
Radiated Spurious Emissions	9 kHz to 30 MHz	95%	±5.32 dB
Radiated Spurious Emissions	30 MHz to 1 GHz	95%	±3.30 dB
Radiated Spurious Emissions	1 GHz to 25 GHz	95%	±3.16 dB

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

2.4 Test and Measurement Equipment

Test Equipment Used for Transmitter Conducted Tests

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2042	Thermohygrometer	Testo	608-H1	45046425	09 Dec 2023	12
A2508	Attenuator	AtlanTecRF	AN18-10	821846#3	Calibrated before use	-
M2036	Signal Analyser	Rohde & Schwarz	FSV30	101791	10 Jun 2023	12
G207635	Signal Generator	Rohde & Schwarz	SMCV100B	103200	07 Oct 2025	36

Test Equipment Used for Transmitter Radiated Emissions Tests

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2003	Thermohygrometer	Testo	608-H1	45046641	09 Dec 2023	12
K0017	3m RSE Chamber	Rainford EMC	N/A	N/A	08 Nov 2023	12
M1995	Test Receiver	Rohde & Schwarz	ESU40	100428	02 Nov 2023	12
A2863	Pre-Amplifier	Keysight	8449B	3008A02100	07 Nov 2023	12
A223628	Pre-Amplifier	Atlantic Microwave	A-LNAKX-380116-S5S5	210837001	03 Nov 2023	12
A2889	Antenna	Schwarzbeck	BBHA 9120 B	00653	02 Nov 2023	12
A2890	Antenna	Schwarzbeck	HWRD 750	014	02 Nov 2023	12
A2892	Antenna	Schwarzbeck	BBHA 9170	9170-727	31 Oct 2023	12
A2916	Attenuator	AtlanTecRF	AN18W5-10	832827#2	25 Jan 2024	12
A2914	High Pass Filter	AtlanTecRF	AFH-03000	2155	25 Jan 2024	12
A2947	High Pass Filter	AtlanTecRF	AFH-07000	1601900001	25 Jan 2024	12
M2040	Thermohygrometer	Testo	608-H1	45124934	09 Dec 2023	12
K0001	3m RSE Chamber	Rainford EMC	N/A	N/A	05 Sep 2023	12
M1874	Test Receiver	Rohde & Schwarz	ESU26	100553	19 May 2023	12
A3165	Mag Loop Antenna	ETS-Lindgren	6502	00224383	05 May 2023	12
A3161	Antenna	Teseq, Inc	CBL6111D	50859	03 May 2023	12
A3113	Attenuator	AtlanTecRF	AN18-06	219706#3	03 May 2023	12
A3085	Low Pass Filter	AtlanTecRF	AFL-02000	18051600014	26 Jan 2024	12
A3154	Pre Amplifier	Com Power	PAM-103	18020012	18 Aug 2023	12

Test and Measurement Equipment (continued)**Test Equipment Used for Transmitter Band Edge Radiated Emissions Tests**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2040	Thermohygrometer	Testo	608-H1	45046641	09 Dec 2023	12
K0001	3m RSE Chamber	Rainford EMC	N/A	N/A	05 Sep 2023	12
M1874	Test Receiver	Rohde & Schwarz	ESU26	100553	19 May 2023	12
A3179	Pre-Amplifier	Hewlett Packard	8449B	3008A00934	14 Sep 2023	12
A3138	Antenna	Schwarzbeck	BBHA 9120 B	00702	22 Aug 2023	12
A2523	Attenuator	AtlanTecRF	AN18W5-10	832827#1	26 Jan 2024	12
M2003	Thermohygrometer	Testo	608-H1	45046641	09 Dec 2023	12
K0017	3m RSE Chamber	Rainford EMC	N/A	N/A	08 Nov 2023	12
M1995	Test Receiver	Rohde & Schwarz	ESU40	100428	02 Nov 2023	12
A2863	Pre-Amplifier	Keysight	8449B	3008A02100	07 Nov 2023	12
A2916	Attenuator	AtlanTecRF	AN18W5-10	832827#2	25 Jan 2024	12
A2889	Antenna	Schwarzbeck	BBHA 9120 B	00653	02 Nov 2023	12

3 Equipment Under Test (EUT)

3.1 Identification of Equipment Under Test (EUT)

Brand Name:	Apple
Model Name or Number / HVIN:	A2918
PMN:	MacBook Pro
Test Sample Serial Number:	VXT97D7WDV <i>(Conducted sample)</i>
Hardware Version:	REV 1.0
Software Version:	22E21820r
FCC ID:	BCGA2918
ISED Canada Certification Number:	IC: 579C-A2918
Date of Receipt:	06 April 2023

Brand Name:	Apple
Model Name or Number / HVIN:	A2918
PMN:	MacBook Pro
Test Sample Serial Number:	J5047MKVKJ <i>(Radiated sample)</i>
Hardware Version:	REV 1.0
Software Version:	22E21820r
FCC ID:	BCGA2918
ISED Canada Certification Number:	IC: 579C-A2918
Date of Receipt:	14 March 2023

3.2 Modifications Incorporated in the EUT

No modifications were applied to the EUT during testing.

3.3 Additional Information Related to Testing

Technology Tested:	Bluetooth				
Type of Unit:	Transceiver				
Channel Spacing:	1 MHz				
Mode:	Basic Rate	Enhanced Data Rate			
Modulation:	GFSK	$\pi/4$ -DQPSK	8DPSK		
Packet Type (Maximum Payload):	DH5	2DH5	3DH5		
Data Rate (Mbit/s):	1	2	3		
Power Supply Requirement(s):	Nominal	12 VDC via 120 VAC 60 Hz AC/DC supply			
Maximum Conducted Output Power:	17.0 dBm				
Transmit Frequency Range:	2400 MHz to 2483.5 MHz				
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)		
	Bottom	0	2402		
	Middle	39	2441		
	Top	78	2480		

3.4 Description of Available Antennas

The radio utilizes three integrated antennas, with the following maximum gains:

Antenna Port	Frequency Range (MHz)	Antenna Gain (dBi)
Core 0	2400 to 2480	5.0
Core 1	2400 to 2480	5.8
Dedicated Core	2400 to 2480	5.8

The EUT also supports TxBF with unequal gains and equal transmit powers. Calculations for directional gain were in accordance with KDB 662911 D01 v02r01 Section F)2)d)(i). Directional gain of Core 0 & Core 1 was calculated as:

$$N_{ANT} = 2, G_{Core0} = 5.0 \text{ dBi}, G_{Core1} = 5.8 \text{ dBi}$$

$$\begin{aligned} \text{Directional Gain} &= 10 \log \left[\frac{\left(10^{\frac{G_1}{20}} + 10^{\frac{G_2}{20}} + \dots + 10^{\frac{G_N}{20}} \right)^2}{N_{ANT}} \right] = 10 \log \left[\frac{\left(10^{\frac{G_1}{20}} + 10^{\frac{G_2}{20}} \right)^2}{2} \right] \\ &= 10 \log \left[\frac{\left(10^{\frac{5.0}{20}} + 10^{\frac{5.8}{20}} \right)^2}{2} \right] = 8.4 \text{ dBi} \end{aligned}$$

3.5 Description of Test Setup

Support Equipment

The following support equipment was used to exercise the EUT during testing:

Description:	Test Laptop
Brand Name:	Apple
Model Name or Number:	MacBook Pro
Serial Number:	FVFDH03JQ05G

Description:	USB Diagnostic Cable
Brand Name:	Apple
Model Name or Number:	Chimp
Serial Number:	30A99B

Description:	MicroSD Card
Brand Name:	Sandisk Edge
Model Name or Number:	Not marked or stated
Serial Number:	Not marked or stated

Description:	SD Card Adaptor
Brand Name:	Verbatim
Model Name or Number:	Not marked or stated
Serial Number:	Not marked or stated

Description:	Power Adaptor
Brand Name:	Apple
Model Name or Number:	A1632
Serial Number:	Not marked or stated

Description:	Personal Hands Free (PHF)
Brand Name:	Not marked or stated
Model Name or Number:	Not marked or stated
Serial Number:	Not marked or stated

Description:	HDMI Cable. Length 3 m.
Brand Name:	Not marked or stated
Model Name or Number:	Not marked or stated
Serial Number:	Not marked or stated

Support Equipment (continued)

Description:	USB-C Dock Termination Hub
Brand Name:	Lenovo
Model Name or Number:	LDC-G2
Serial Number:	ZKW1XQR0

Description:	USB-C to A Adaptor. Quantity 2.
Brand Name:	Not marked or stated
Model Name or Number:	Not marked or stated
Serial Number:	Not marked or stated

Description:	USB-C Cable. Length 3 m. Quantity 2.
Brand Name:	Not marked or stated
Model Name or Number:	Not marked or stated
Serial Number:	Not marked or stated

Operating Modes

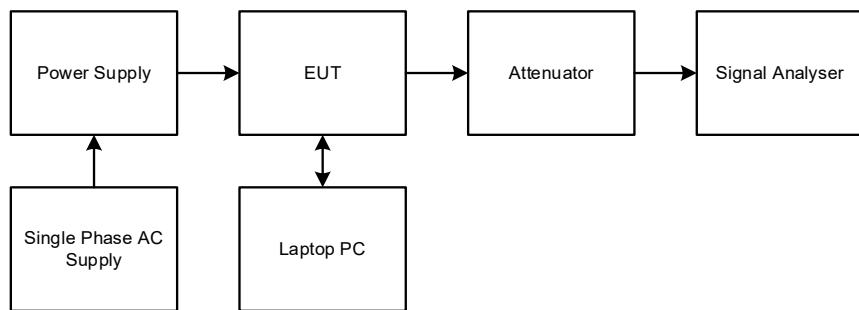
The EUT was tested in the following operating mode(s):

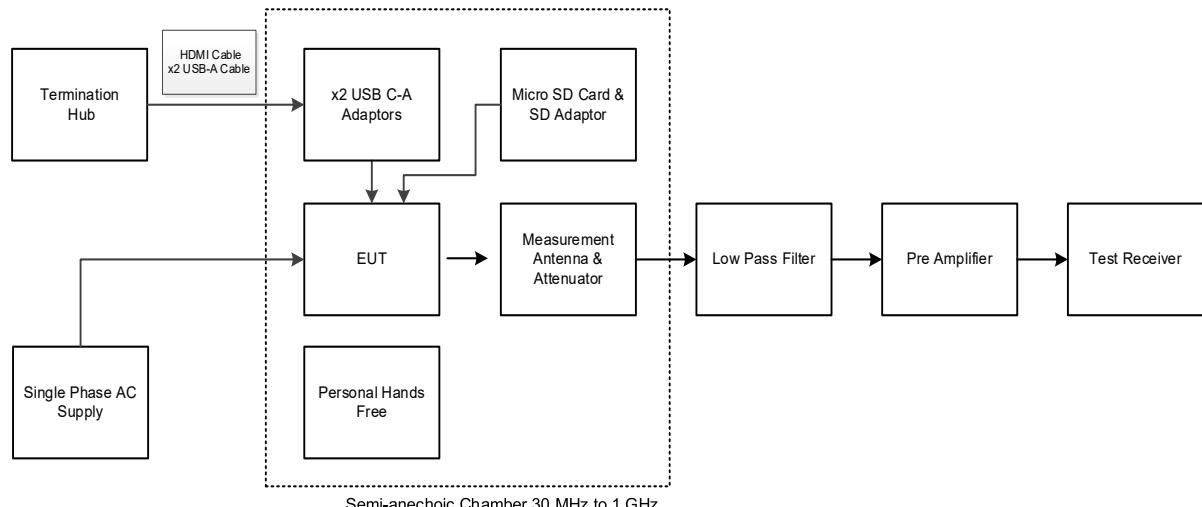
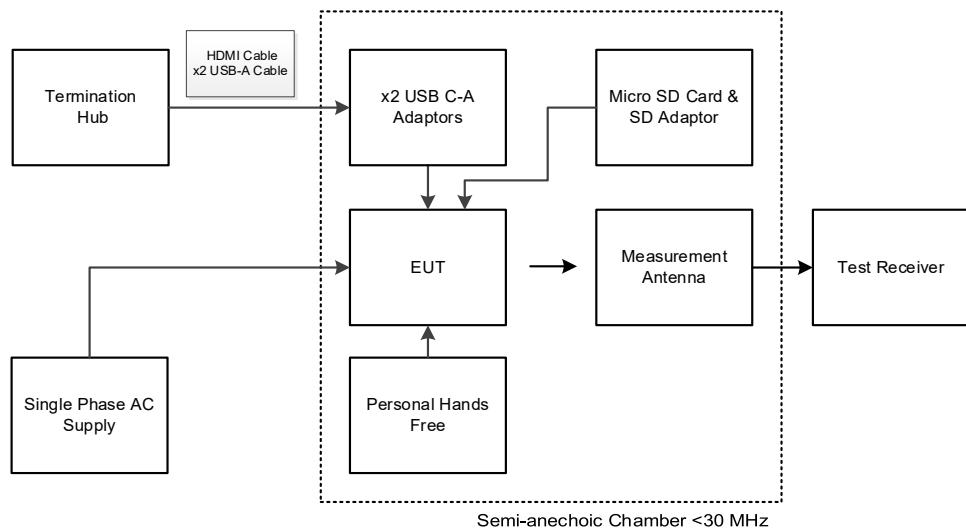
- Continuously transmitting at maximum power on bottom, middle and top channels in BDR (DH5 packets) or EDR (2DH5 or 3DH5 packets) as required.
- Continuously transmitting at maximum power in hopping mode on all channels in BDR (DH5 packets) or EDR (2DH5 or 3DH5 packets) as required.

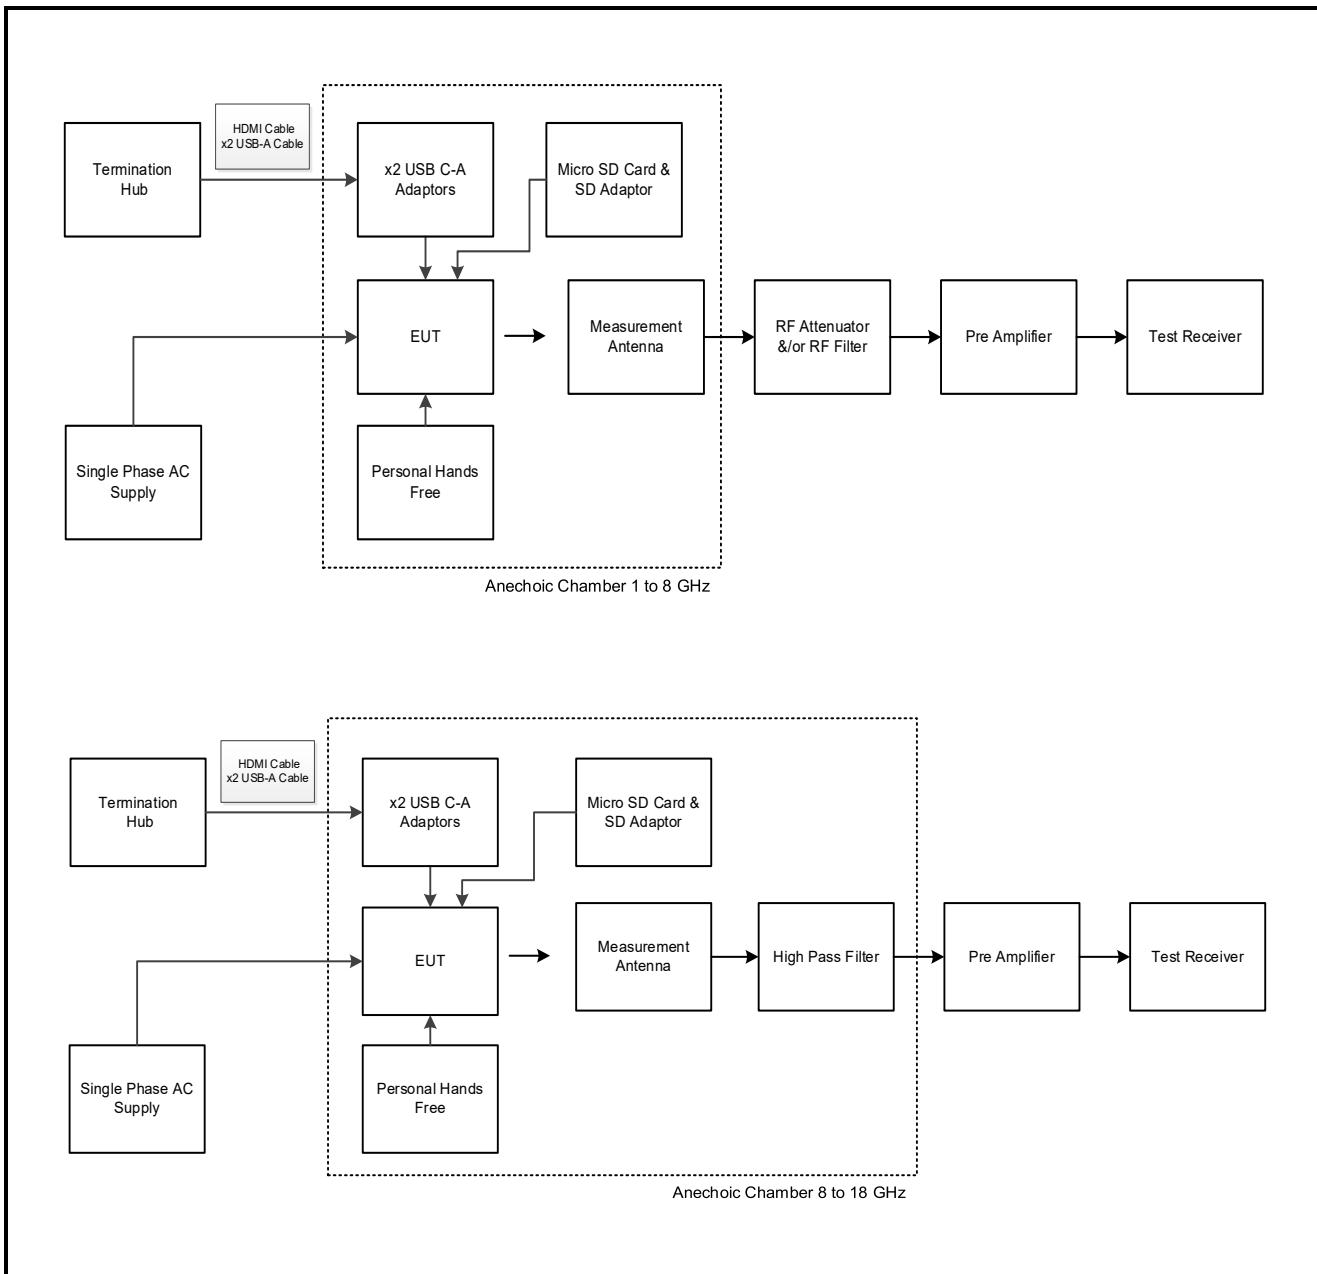
Configuration and Peripherals

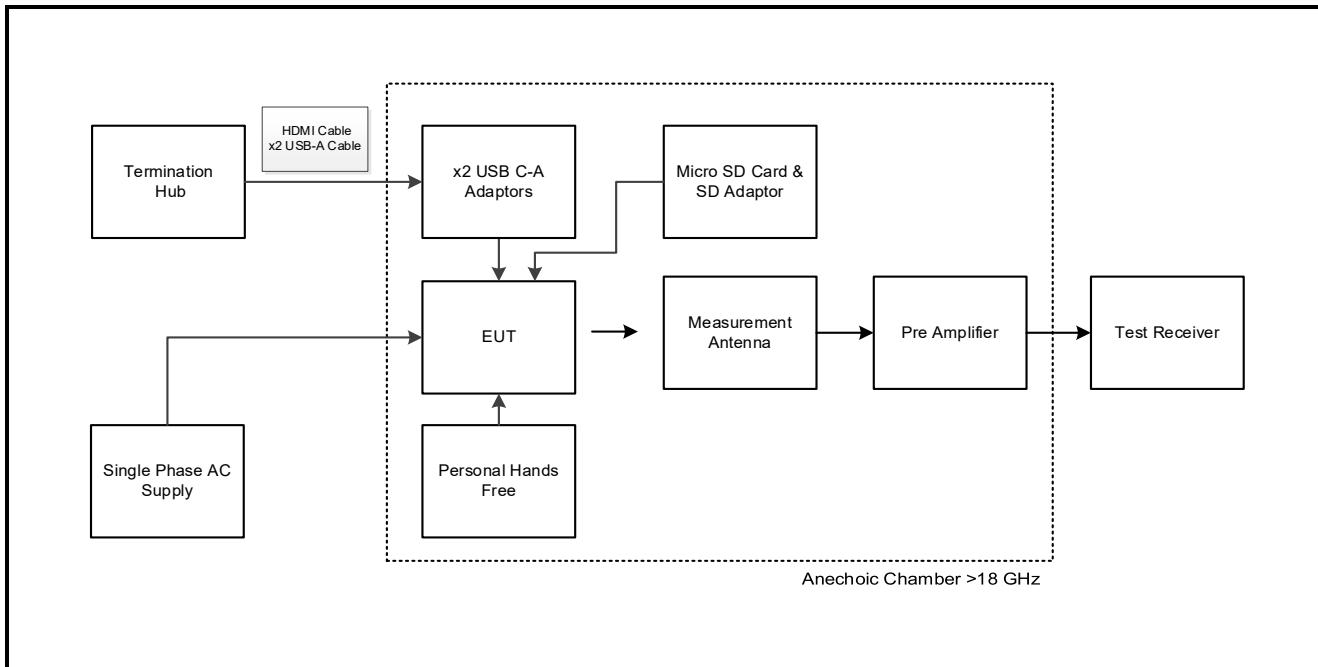
The EUT was tested in the following configuration(s):

- Controlled in test mode using a set of commands entered into a terminal application on the support laptop supplied by the customer. The commands were used to enable a continuous transmission and to select the test channels as required.
- The EUT has a dedicated core (core 2), which operates in SISO mode only, in addition to two cores which operate in both SISO and TxBF modes. Core 0 & Core 1 are identical but have unequal gains therefore conducted tests have been performed on the Core with the highest antenna gain. Modes tested were:
 - DH5 / SISO / Core 1
 - 2DH5 / SISO / Core 1
 - 3DH5 / SISO / Core 1
 - DH5 / SISO / Core 2
 - 2DH5 / SISO / Core 2
 - 3DH5 / SISO / Core 2
 - DH5 / Beamforming / Core 0 + Core 1
 - 2DH5 / Beamforming / Core 0 + Core 1
 - 3DH5 / Beamforming / Core 0 + Core 1
- The customer supplied U.FL RF cables with the EUT in order to perform conducted measurements. This measured additional path loss was included in any path loss calculations.
- The EUT was powered from a 120 VAC 60 Hz single phase mains supply.
- Transmitter radiated spurious emissions tests were performed with the EUT transmitting in 3DH5 Beamforming Core 0+Core 1 mode, as this mode was found to transmit the highest power.
- Radiated spurious emissions were performed with the EUT in the position that produced worst case with respect to emissions. All ports were terminated into suitable terminations and placed under the turntable.

Test Setup Diagrams**Conducted Tests:****Test Setup for Transmitter Conducted Tests**

Test Setup Diagrams (continued)**Radiated Tests:****Test Setup for Transmitter Radiated Emissions**

Test Setup Diagrams (continued)**Test Setup for Transmitter Radiated Emissions (continued)**

Test Setup Diagrams (continued)**Test Setup for Transmitter Radiated Emissions (continued)**

4 Antenna Port Test Results

4.1 Transmitter 99% Emission Bandwidth

Test Summary:

Test Engineers:	Max Passell & Jiyu Zou	Test Dates:	24 April 2023 & 25 April 2023
Test Sample Serial Number:	VXT97D7WDV		

FCC Reference:	N/A
ISED Canada Reference:	RSS-Gen 6.7
Test Method Used:	RSS-Gen 6.7 and Notes below

Environmental Conditions:

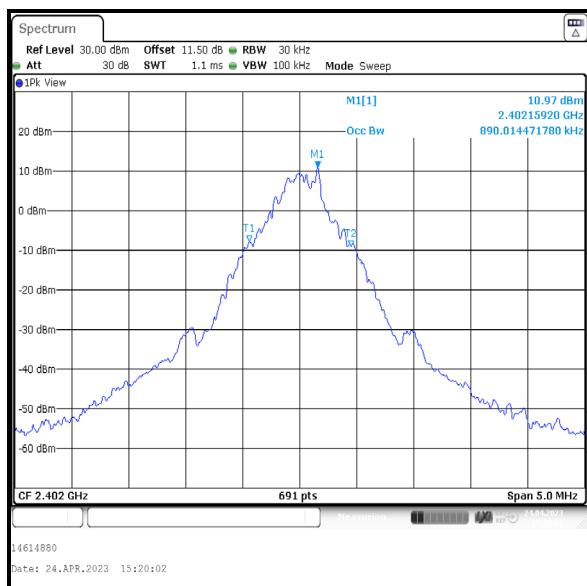
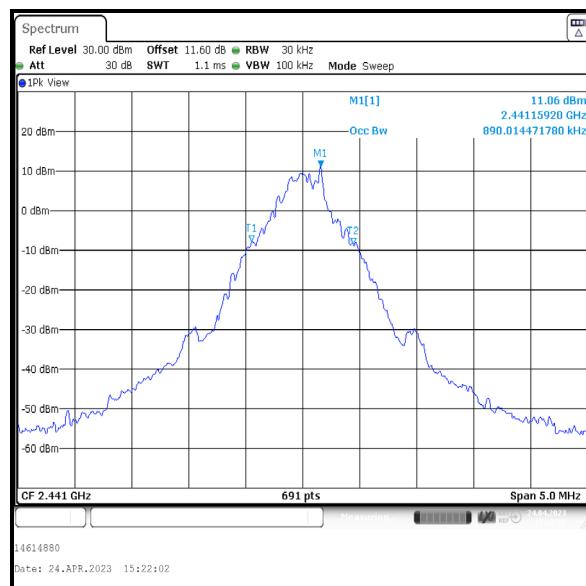
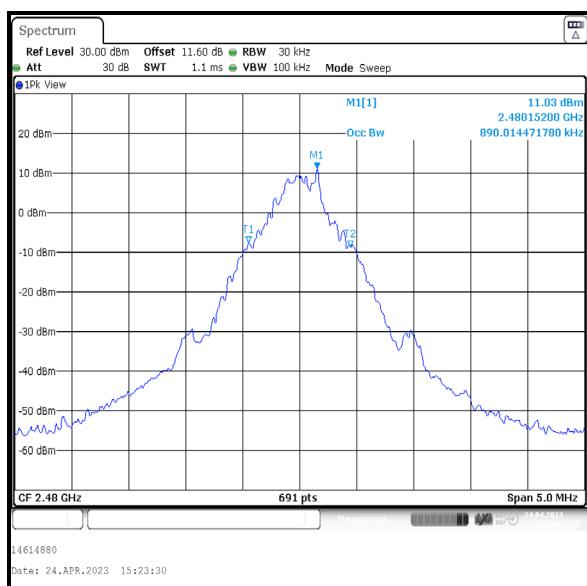
Temperature (°C):	22
Relative Humidity (%):	30 to 40

Note(s):

1. The 99% emission bandwidth was measured using the signal analyser occupied bandwidth function. The resolution bandwidth was set in the range of 1% to 5% of the occupied bandwidth and the video bandwidth set to 3 times the resolution bandwidth. The span was set to capture all products of the modulation process including emission skirts.
2. The signal analyser resolution bandwidth was set to 30 kHz and video bandwidth 100 kHz. A peak detector was used, sweep time was set to auto and the trace mode was Max Hold. The span was set to 5 MHz. The signal analyser function set the measurements to be made at 99% of the emission bandwidth. The results are given in the tables below.
3. The signal analyser was connected to the RF port on the EUT using suitable attenuation and RF cable.

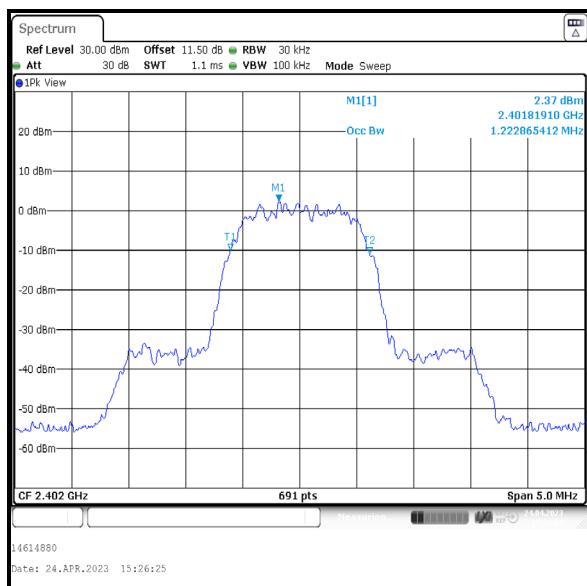
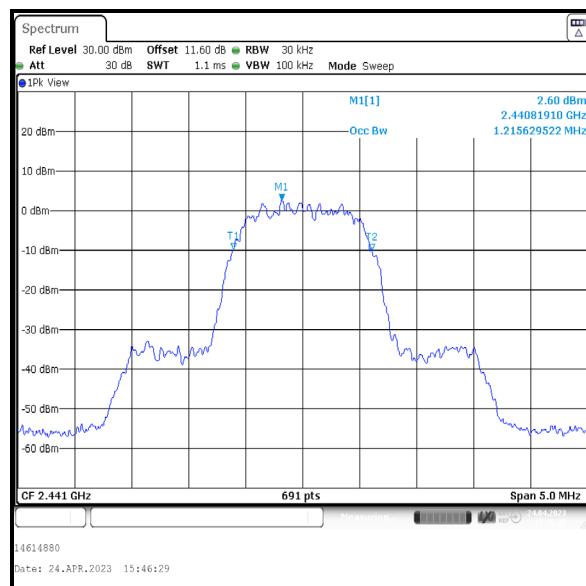
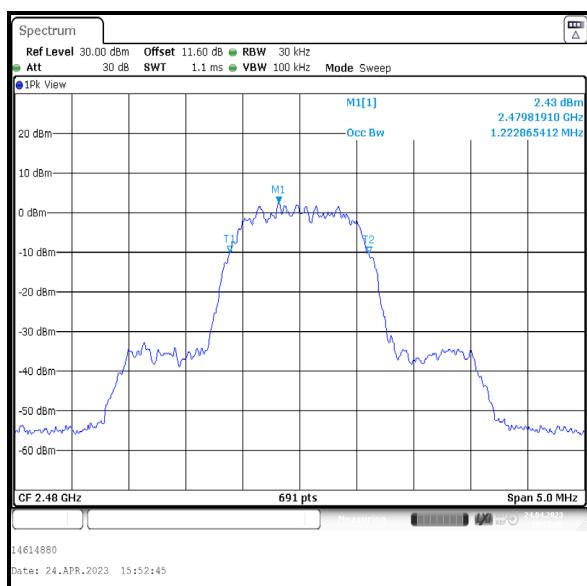
Transmitter 99% Emission Bandwidth (continued)**Results: DH5 / SISO / Core 1**

Channel	99% Emission Bandwidth (kHz)
Bottom	890.014
Middle	890.014
Top	890.014

**Bottom Channel****Middle Channel****Top Channel**

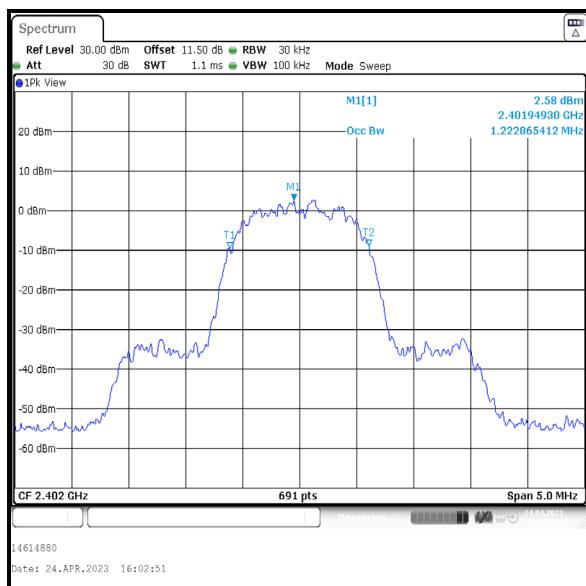
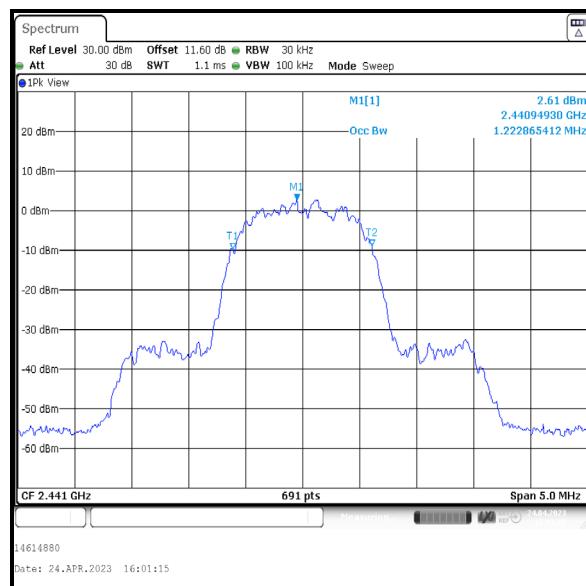
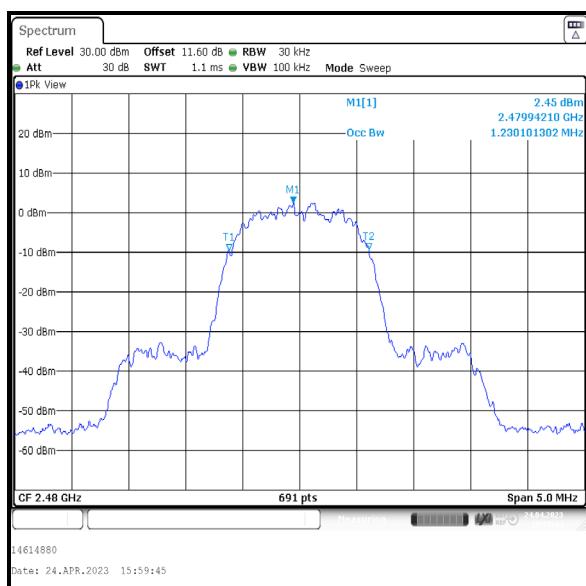
Transmitter 99% Emission Bandwidth (continued)**Results: 2DH5 / SISO / Core 1**

Channel	99% Emission Bandwidth (kHz)
Bottom	1222.865
Middle	1215.630
Top	1222.865

**Bottom Channel****Middle Channel****Top Channel**

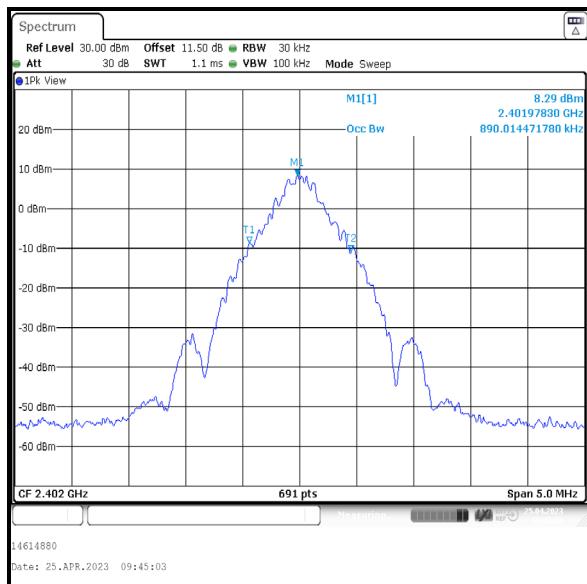
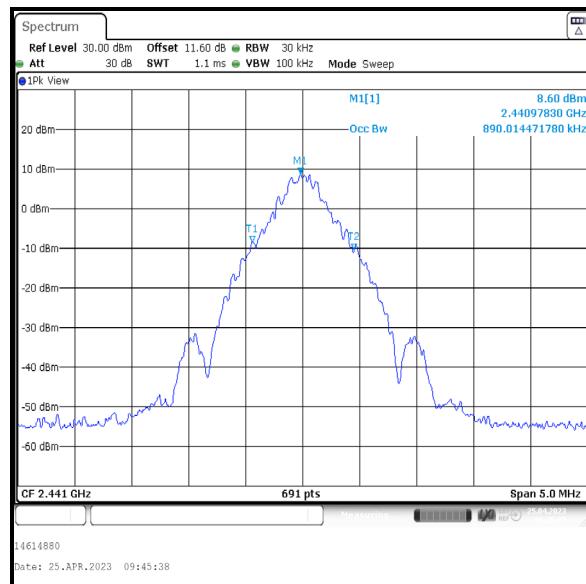
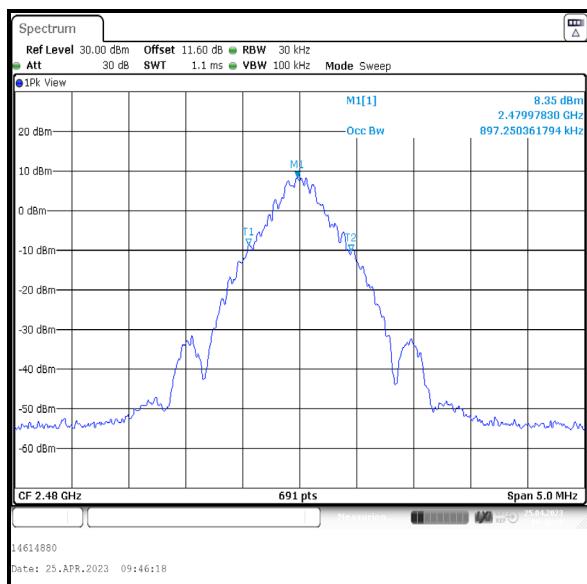
Transmitter 99% Emission Bandwidth (continued)**Results: 3DH5 / SISO / Core 1**

Channel	99% Emission Bandwidth (kHz)
Bottom	1222.865
Middle	1222.865
Top	1230.101

**Bottom Channel****Middle Channel****Top Channel**

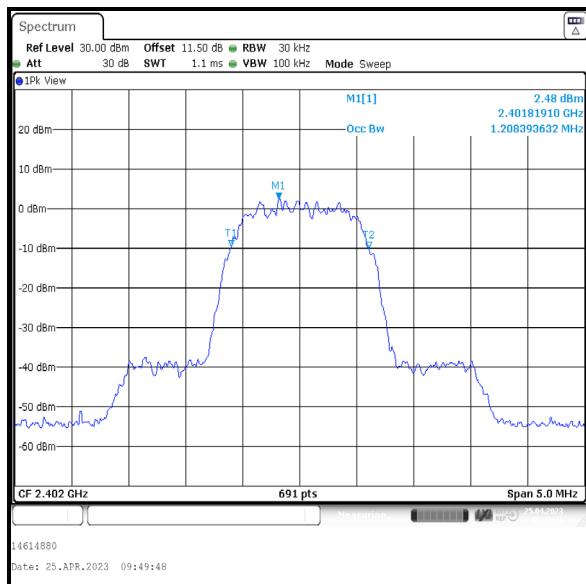
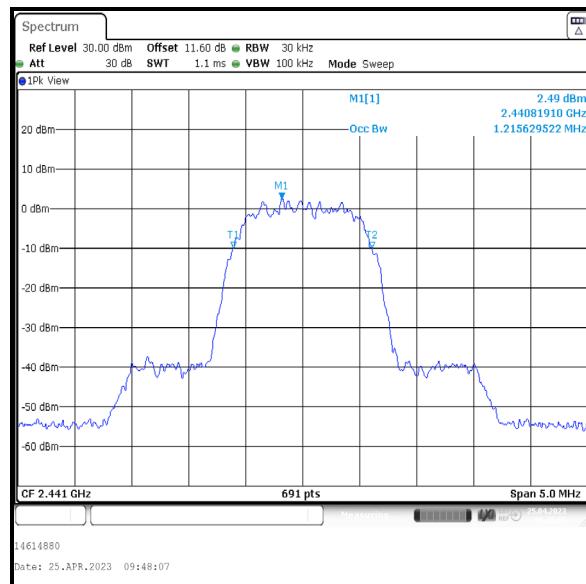
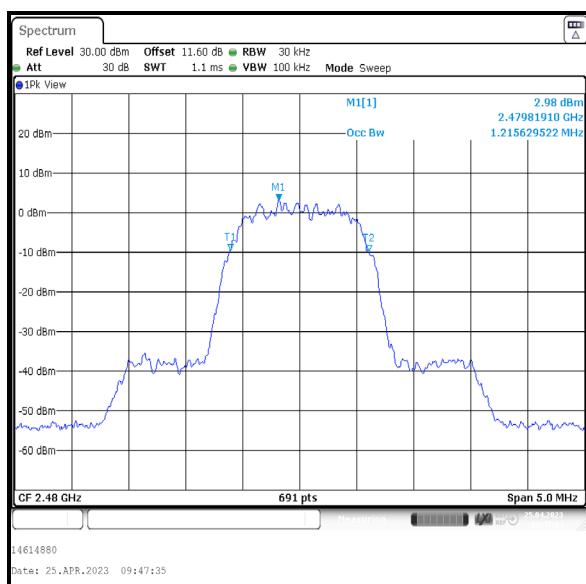
Transmitter 99% Emission Bandwidth (continued)**Results: DH5 / SISO / Core 2**

Channel	99% Emission Bandwidth (kHz)
Bottom	890.014
Middle	890.014
Top	897.250

**Bottom Channel****Middle Channel****Top Channel**

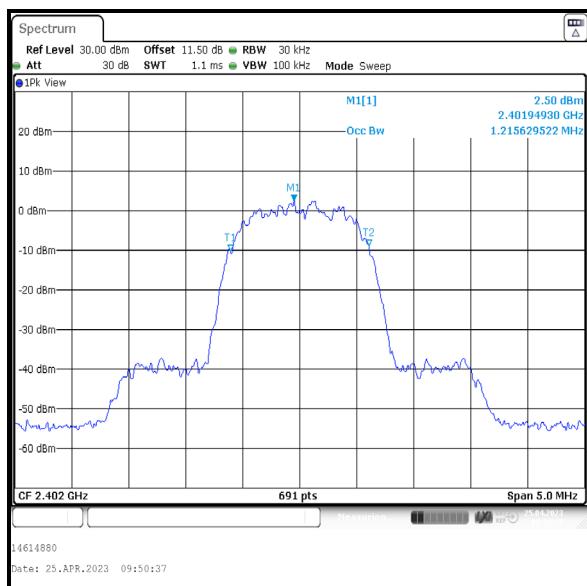
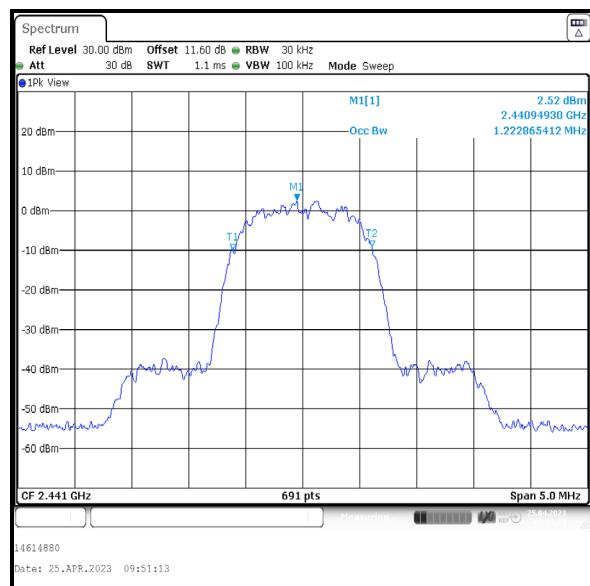
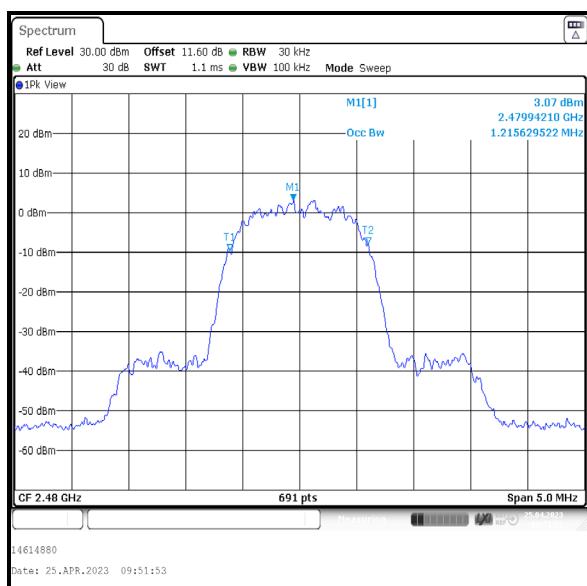
Transmitter 99% Emission Bandwidth (continued)**Results: 2DH5 / SISO / Core 2**

Channel	99% Emission Bandwidth (kHz)
Bottom	1208.394
Middle	1215.630
Top	1215.630

**Bottom Channel****Middle Channel****Top Channel**

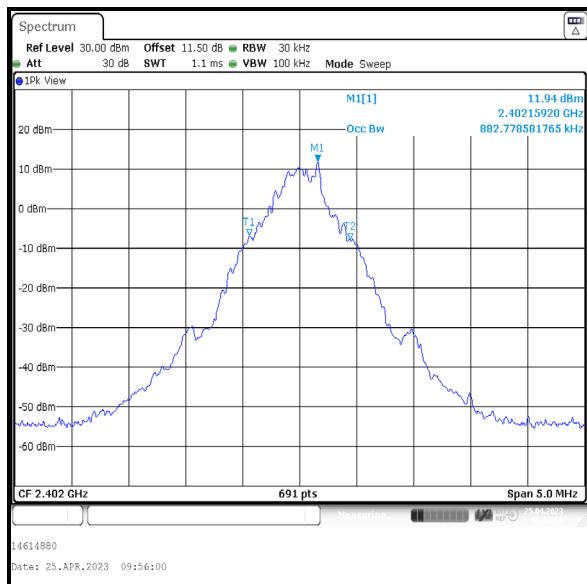
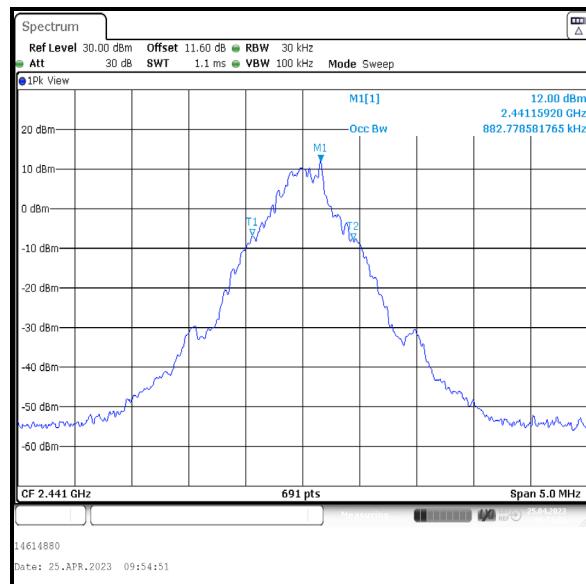
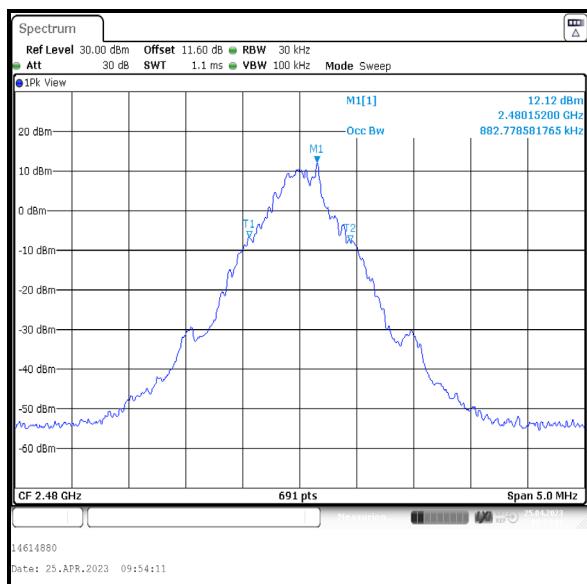
Transmitter 99% Emission Bandwidth (continued)**Results: 3DH5 / SISO / Core 2**

Channel	99% Emission Bandwidth (kHz)
Bottom	1215.630
Middle	1222.865
Top	1215.630

**Bottom Channel****Middle Channel****Top Channel**

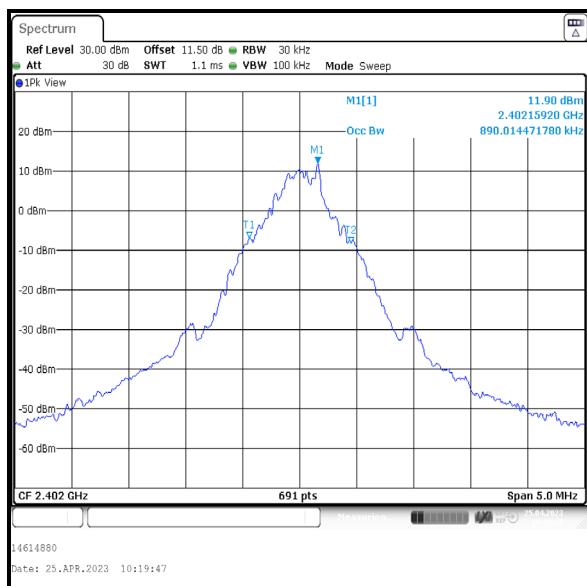
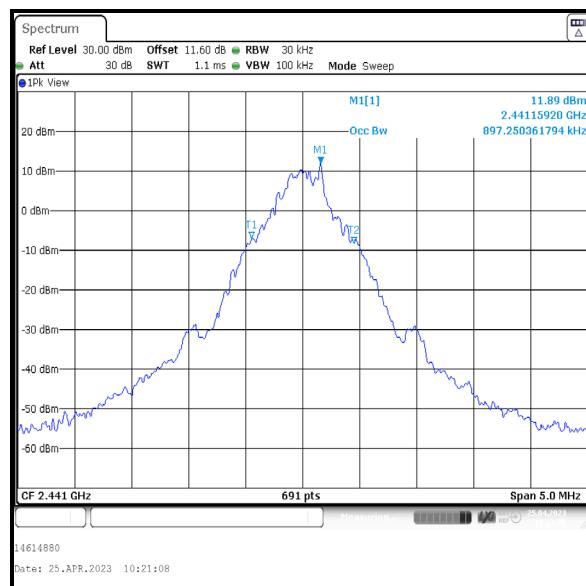
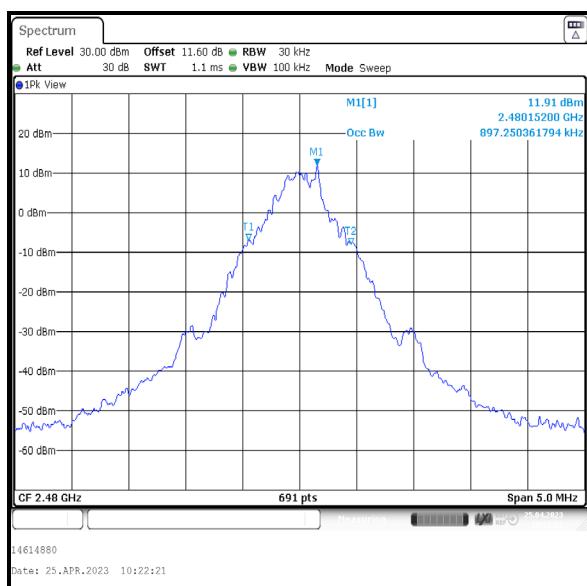
Transmitter 99% Emission Bandwidth (continued)**Results: DH5 / Beamforming / Core 0**

Channel	99% Emission Bandwidth (kHz)
Bottom	882.779
Middle	882.779
Top	882.779

**Bottom Channel****Middle Channel****Top Channel**

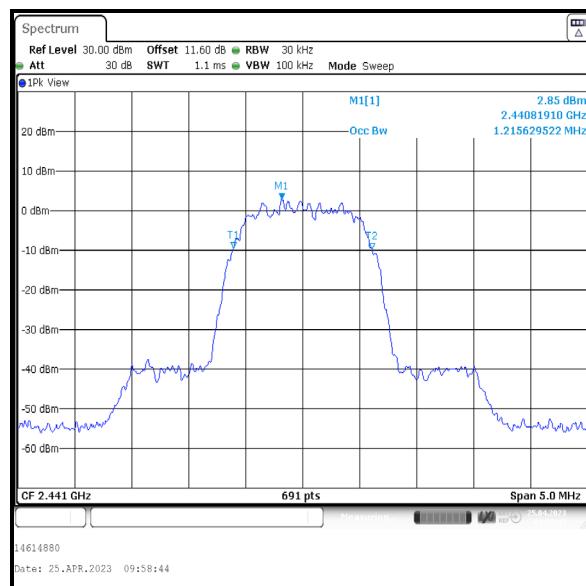
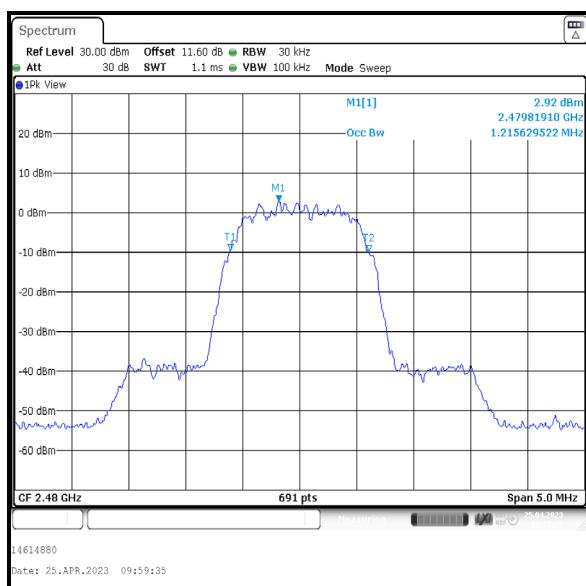
Transmitter 99% Emission Bandwidth (continued)**Results: DH5 / Beamforming / Core 1**

Channel	99% Emission Bandwidth (kHz)
Bottom	890.014
Middle	897.250
Top	897.250

**Bottom Channel****Middle Channel****Top Channel**

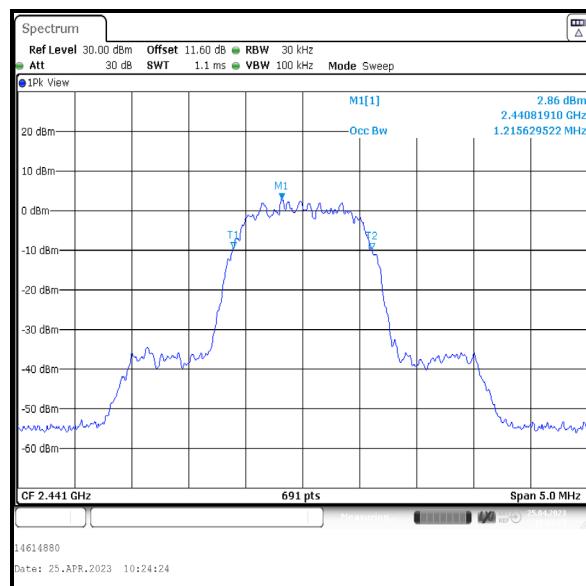
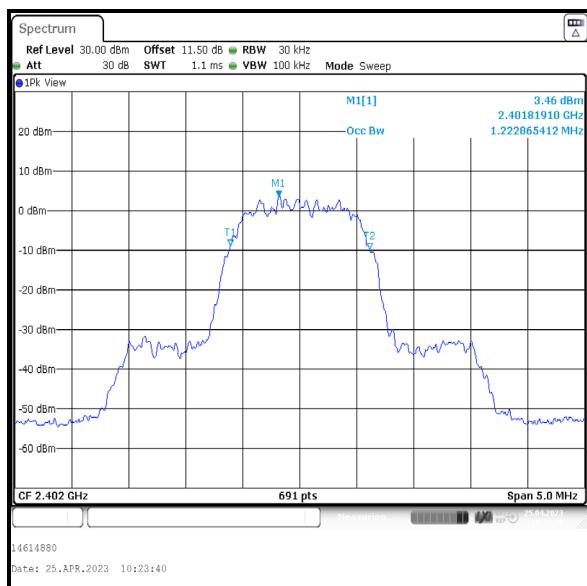
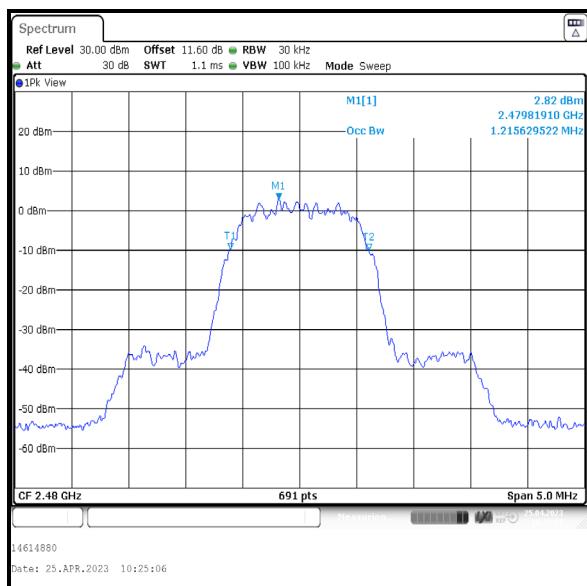
Transmitter 99% Emission Bandwidth (continued)**Results: 2DH5 / Beamforming / Core 0**

Channel	99% Emission Bandwidth (kHz)
Bottom	1215.630
Middle	1215.630
Top	1215.630

**Bottom Channel****Middle Channel****Top Channel**

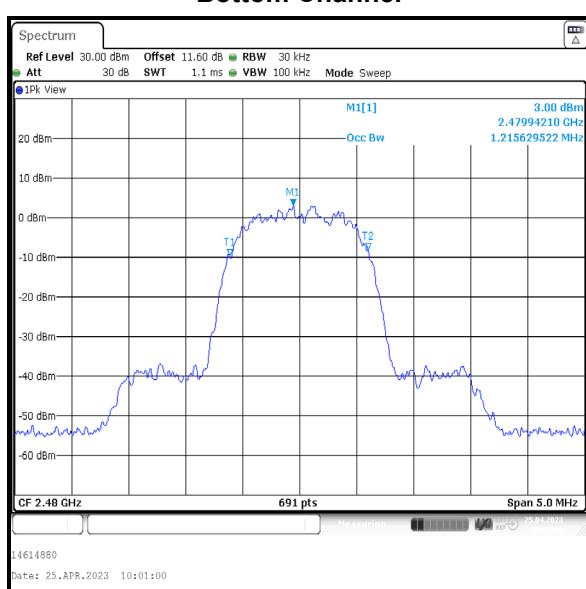
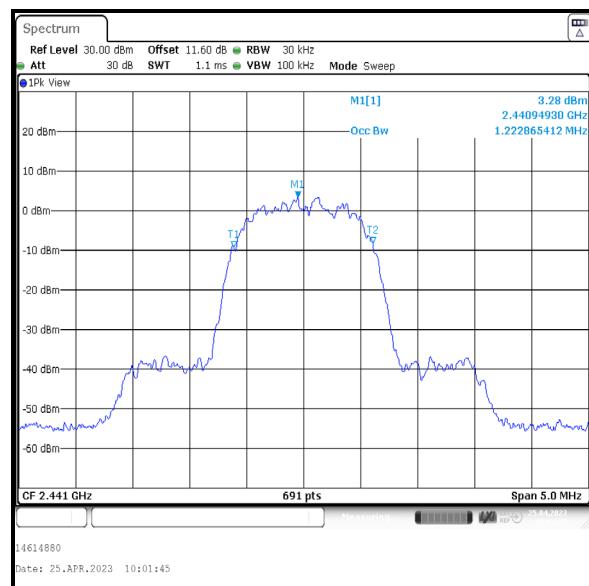
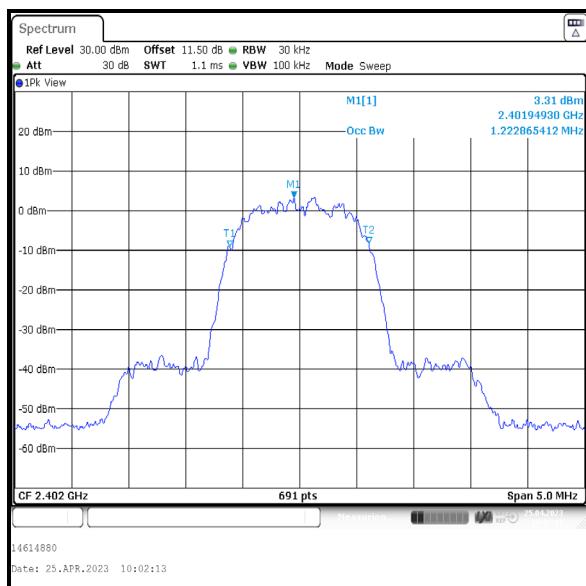
Transmitter 99% Emission Bandwidth (continued)**Results: 2DH5 / Beamforming / Core 1**

Channel	99% Emission Bandwidth (kHz)
Bottom	1222.865
Middle	1215.630
Top	1215.630

**Bottom Channel**

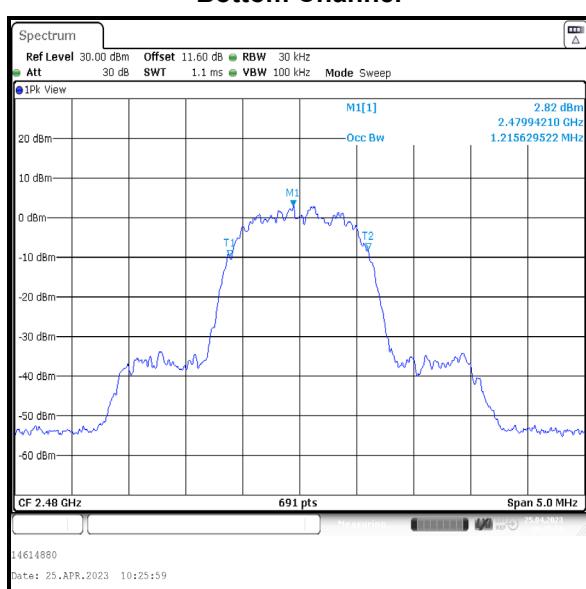
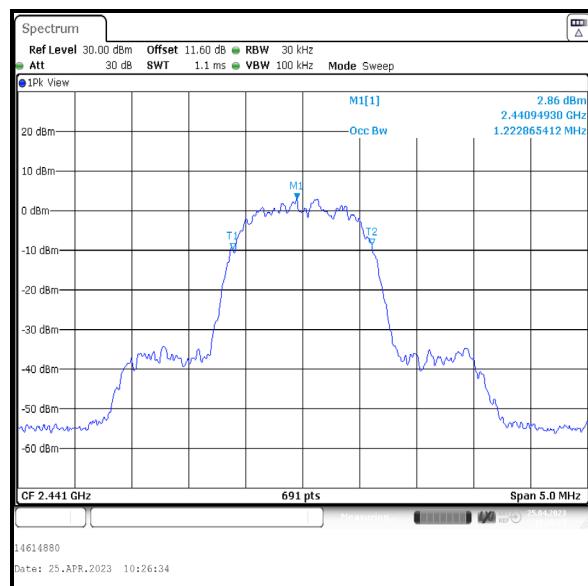
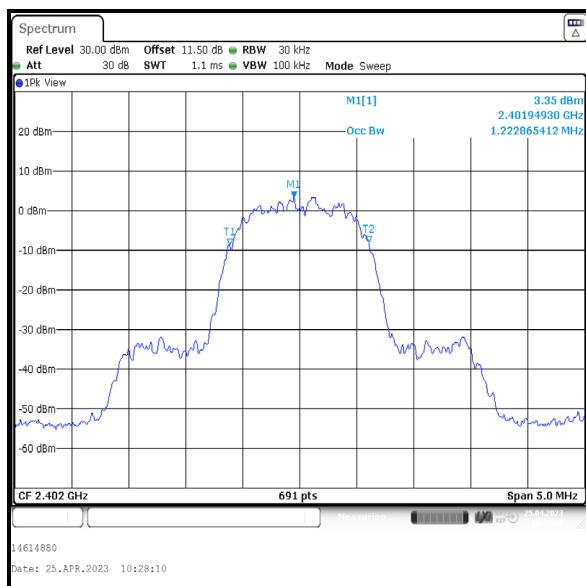
Transmitter 99% Emission Bandwidth (continued)**Results: 3DH5 / Beamforming / Core 0**

Channel	99% Emission Bandwidth (kHz)
Bottom	1222.865
Middle	1222.865
Top	1215.630



Transmitter 99% Emission Bandwidth (continued)**Results: 3DH5 / Beamforming / Core 1**

Channel	99% Emission Bandwidth (kHz)
Bottom	1222.865
Middle	1222.865
Top	1215.630



4.2 Transmitter 20 dB Bandwidth

Test Summary:

Test Engineers:	Max Passell & Jiyu Zou	Test Date:	27 April 2023
Test Sample Serial Number:	VXT97D7WDV		

FCC Reference:	Part 15.247(a)(1)
ISED Canada Reference:	RSS-Gen 6.7 / RSS-247 5.1(a)
Test Method Used:	ANSI C63.10 Section 6.9.2

Environmental Conditions:

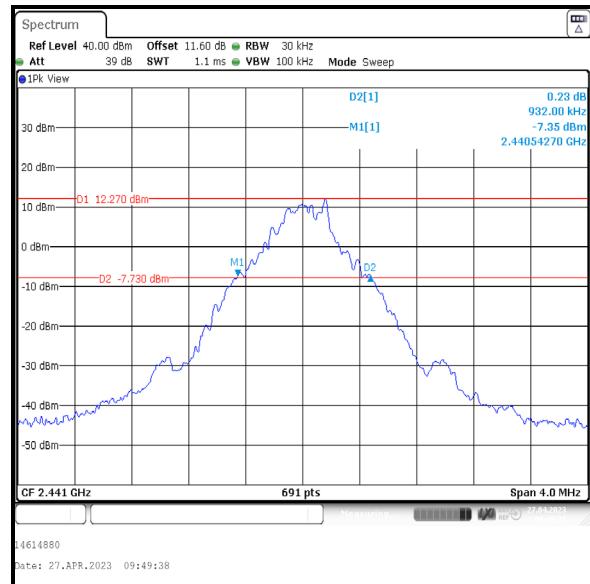
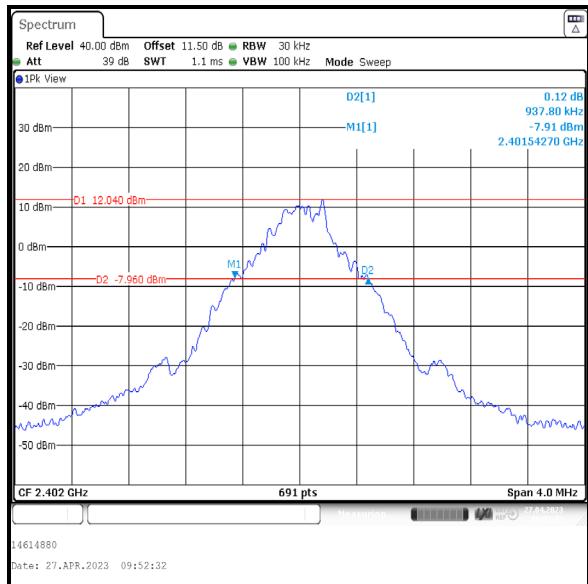
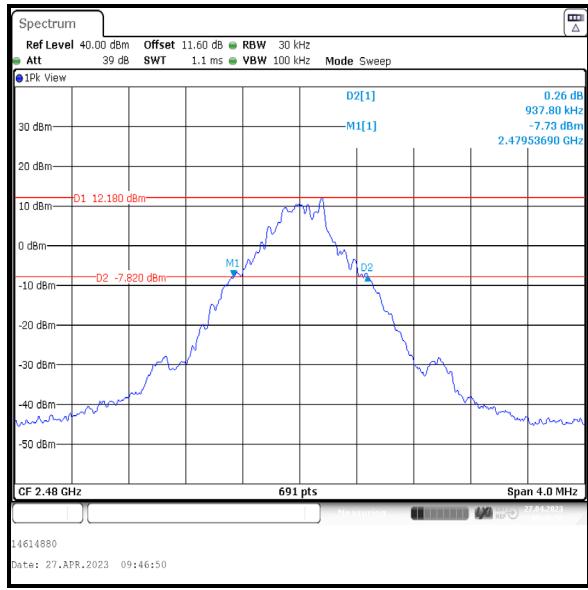
Temperature (°C):	20
Relative Humidity (%):	52

Note(s):

1. The signal analyser resolution bandwidth was set to 30 kHz and video bandwidth 100 kHz. A peak detector was used, sweep time was set to auto and the trace mode was Max Hold. The span was set to 4 MHz. Normal and delta markers were placed 20 dB down from the peak of the carrier.
2. The signal analyser was connected to the RF port on the EUT using suitable attenuation and RF cable.

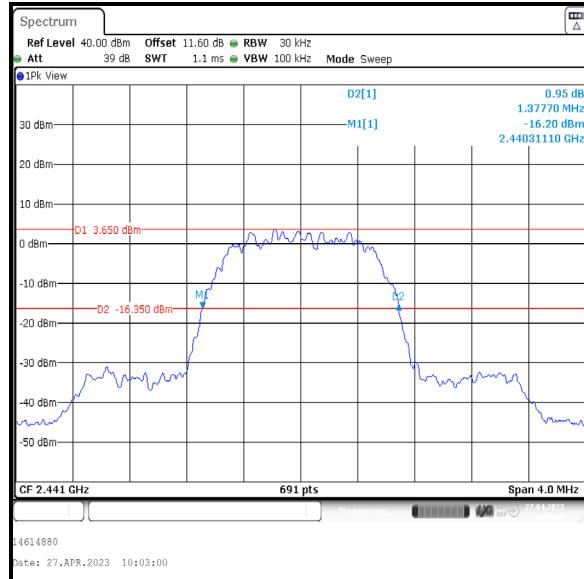
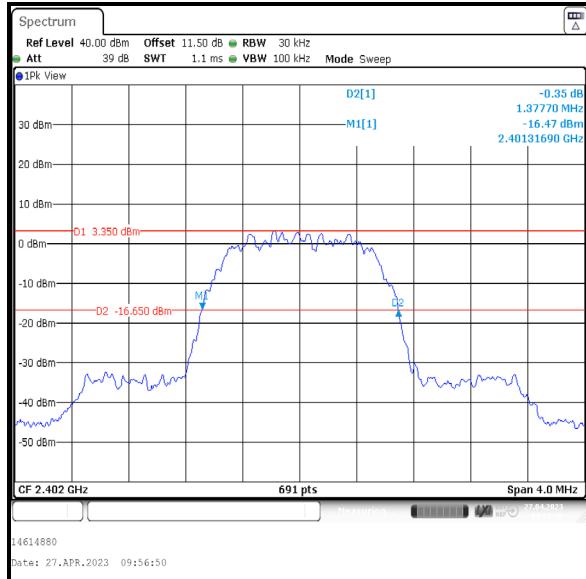
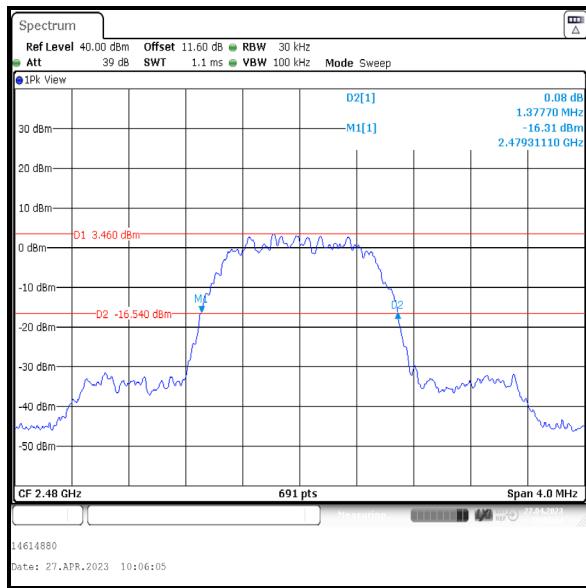
Transmitter 20 dB Bandwidth (continued)**Results: DH5 / SISO / Core 1**

Channel	20 dB Bandwidth (kHz)
Bottom	937.800
Middle	932.000
Top	937.800

**Bottom Channel****Middle Channel****Top Channel**

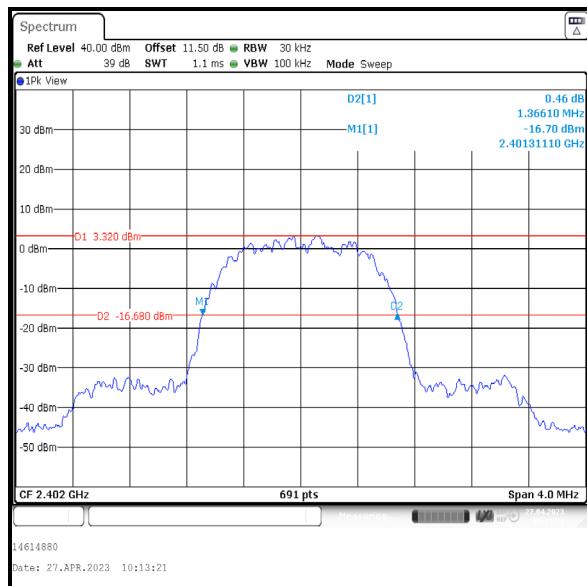
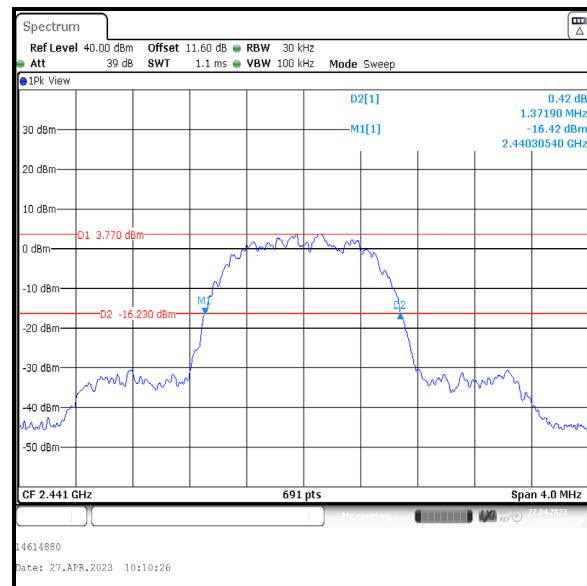
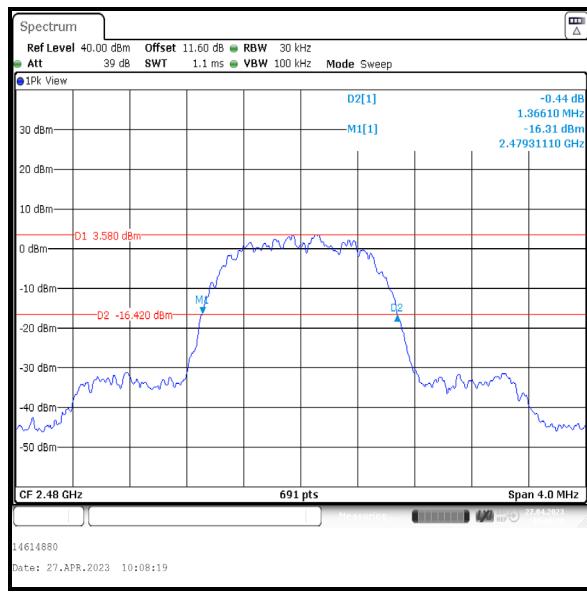
Transmitter 20 dB Bandwidth (continued)**Results: 2DH5 / SISO / Core 1**

Channel	20 dB Bandwidth (kHz)
Bottom	1377.700
Middle	1377.700
Top	1377.700

**Bottom Channel****Top Channel****Middle Channel**

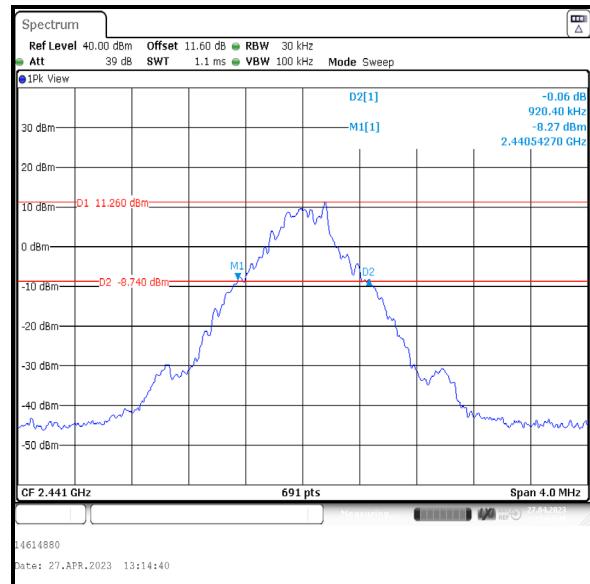
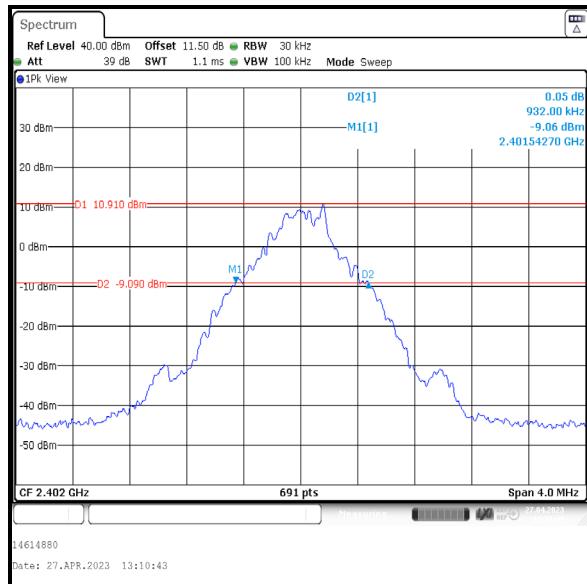
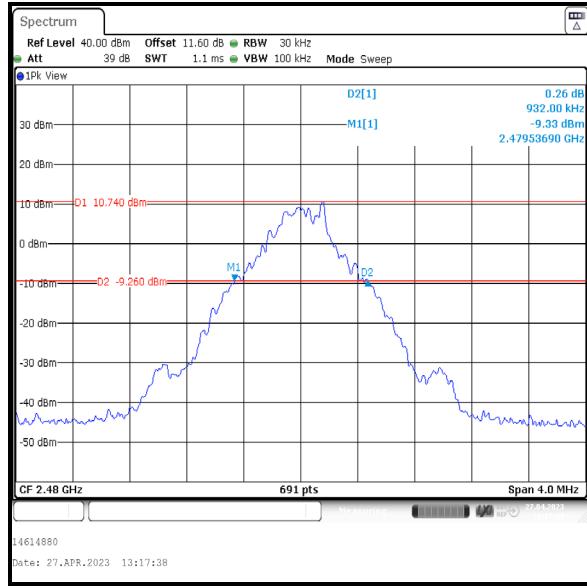
Transmitter 20 dB Bandwidth (continued)**Results: 3DH5 / SISO / Core 1**

Channel	20 dB Bandwidth (kHz)
Bottom	1366.100
Middle	1371.900
Top	1366.100

**Bottom Channel****Middle Channel****Top Channel**

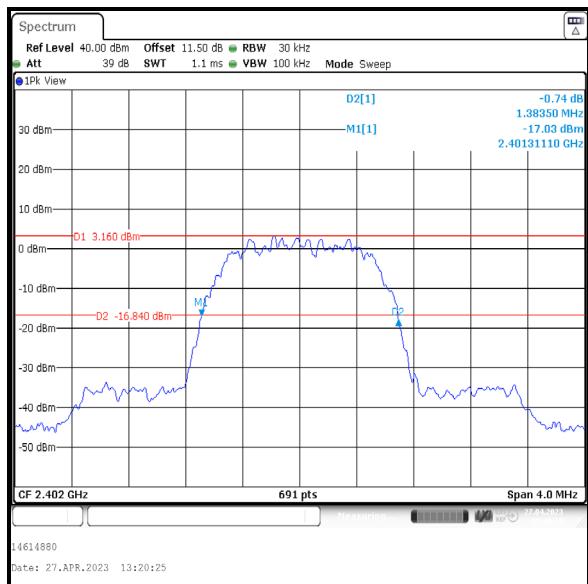
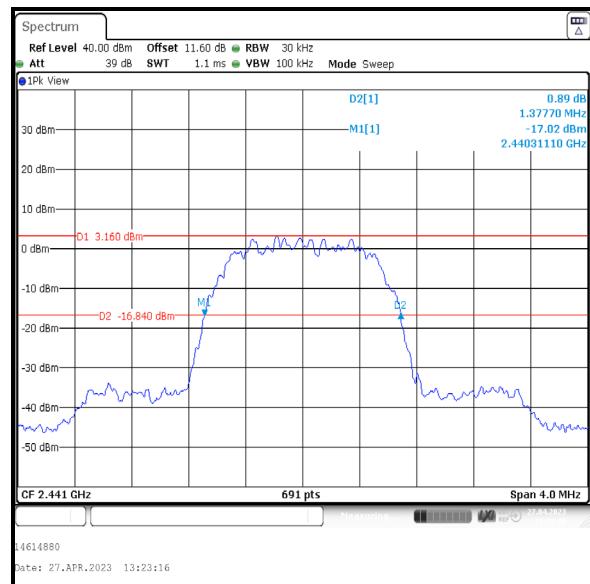
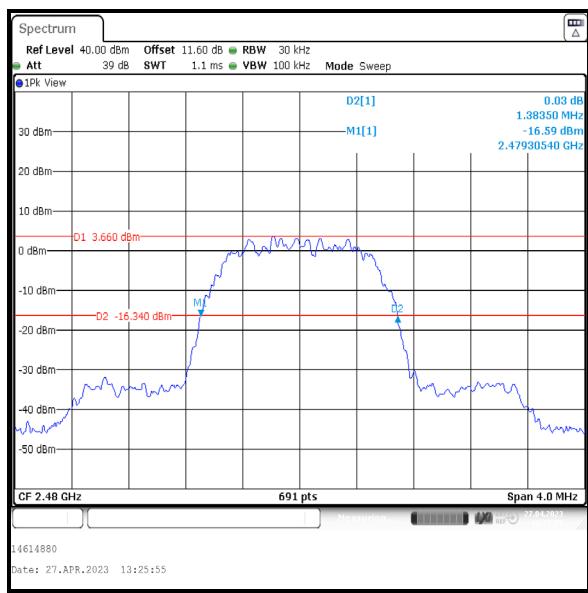
Transmitter 20 dB Bandwidth (continued)**Results: DH5 / SISO / Core 2**

Channel	20 dB Bandwidth (kHz)
Bottom	932.000
Middle	920.400
Top	932.000

**Bottom Channel****Middle Channel****Top Channel**

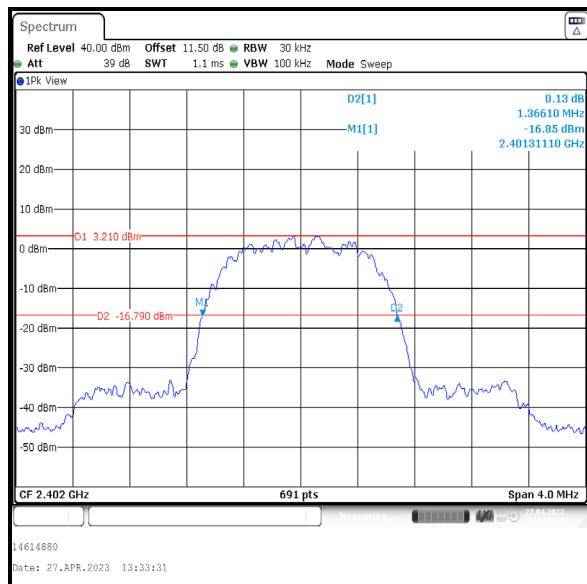
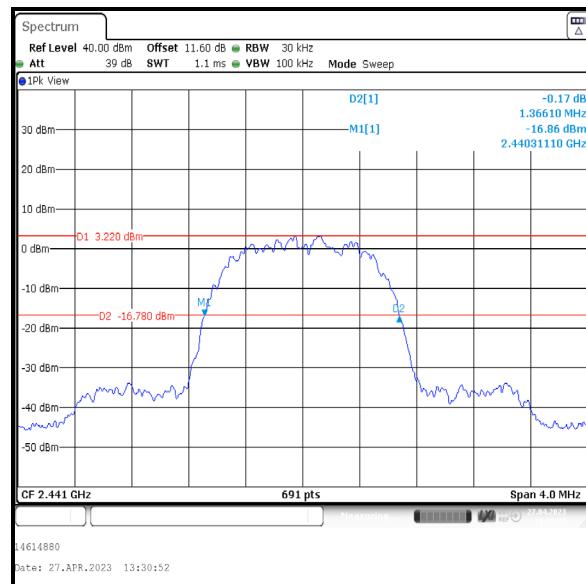
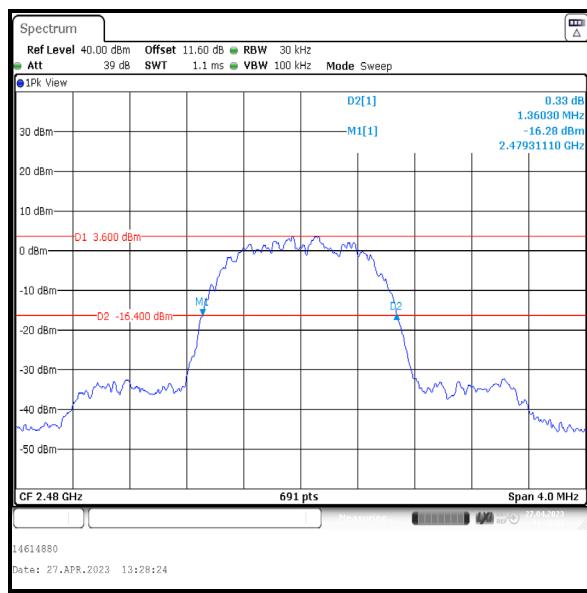
Transmitter 20 dB Bandwidth (continued)**Results: 2DH5 / SISO / Core 2**

Channel	20 dB Bandwidth (kHz)
Bottom	1383.500
Middle	1377.700
Top	1383.500

**Bottom Channel****Middle Channel****Top Channel**

Transmitter 20 dB Bandwidth (continued)**Results: 3DH5 / SISO / Core 2**

Channel	20 dB Bandwidth (kHz)
Bottom	1366.100
Middle	1366.100
Top	1360.300

**Bottom Channel****Middle Channel****Top Channel**