



Element Materials Technology

(formerly PCTEST)

18855 Adams Court, Morgan Hill, CA 95037 USA

Tel. 408.538.5600

<http://www.element.com>



PART 24 MEASUREMENT REPORT

Applicant Name:

Apple Inc.
One Apple Park Way
Cupertino, CA 95014
United States

Date of Testing:

4/18/2024 - 6/24/2024

Test Report Issue Date:

9/6/2024

Test Site/Location:

Element Materials Technology Morgan Hill, CA, USA

Test Report Serial No.:

1C2405200018-08.BCG

FCC ID:**BCGA2995****Applicant Name:****Apple Inc.****Application Type:**

Certification

Model:

A2995, A2996

EUT Type:

Tablet Device

FCC Classification:

PCS Licensed Transmitter (PCB)

FCC Rule Part:

24

Test Procedure(s):

ANSI C63.26-2015, TIA-603-E-2016, KDB 971168 D01
v03r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RJ Ortiz
Executive Vice President

Prepared by: WKR0000006193

Reviewed by: WKR0000006164



ACCREDITED

CERT #2041.02

FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device	Page 1 of 219



V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

T A B L E O F C O N T E N T S

1.0	INTRODUCTION	5
1.1	Scope	5
1.2	Element Materials Technology Test Location.....	5
1.3	Test Facility / Accreditations.....	5
2.0	PRODUCT INFORMATION.....	6
2.1	Equipment Description	6
2.2	Device Capabilities.....	6
2.3	Antenna Description	7
2.4	Test Support Equipment.....	7
2.5	Test Configuration	7
2.6	Software and Firmware	7
2.7	EMI Suppression Device(s)/Modifications	7
3.0	DESCRIPTION OF TESTS	8
3.1	Evaluation Procedure	8
3.2	Radiated Spurious Emissions	8
4.0	MEASUREMENT UNCERTAINTY	9
5.0	TEST EQUIPMENT CALIBRATION DATA	10
6.0	SAMPLE CALCULATIONS	11
7.0	TEST RESULTS.....	12
7.1	Summary.....	12
7.2	Occupied Bandwidth	13
7.3	Spurious and Harmonic Emissions at Antenna Terminal	48
7.4	Band Edge Emissions at Antenna Terminal	65
7.5	Peak-Average Ratio	117
7.6	Radiated Power (EIRP)	174
7.7	Radiated Spurious Emissions	196
7.8	Frequency Stability / Temperature Variation	214
8.0	CONCLUSION.....	219

FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device	Page 2 of 219

PART 24 MEASUREMENT REPORT

Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	OBW [MHz]	PAR at 0.1% [dB]	EIRP		Emission Designator
						Max. Power [W]	Max. Power [dBm]	
WCDMA1900	5 MHz	Spread Spectrum	1852.4 - 1907.6	4.1635	2.90	0.382	25.82	4M16F9W
Band 2	1.4 MHz	QPSK	1850.7 - 1909.3	1.1058	4.94	0.389	25.90	1M11G7W
		16QAM	1850.7 - 1909.3	1.1167	5.78	0.334	25.24	1M12D7W
		64QAM	1850.7 - 1909.3	1.1054	6.43	0.257	24.10	1M11D7W
		256QAM	1850.7 - 1909.3	1.1049	6.70	0.126	21.00	1M10D7W
	3 MHz	QPSK	1851.5 - 1908.5	2.7239	4.65	0.389	25.90	2M72G7W
		16QAM	1851.5 - 1908.5	2.7350	5.70	0.340	25.31	2M73D7W
		64QAM	1851.5 - 1908.5	2.7240	6.45	0.264	24.22	2M72D7W
		256QAM	1851.5 - 1908.5	2.7278	6.68	0.132	21.19	2M73D7W
	5 MHz	QPSK	1852.5 - 1907.5	4.5430	4.91	0.389	25.90	4M54G7W
		16QAM	1852.5 - 1907.5	4.5506	5.87	0.333	25.23	4M55D7W
		64QAM	1852.5 - 1907.5	4.5532	6.46	0.270	24.32	4M55D7W
		256QAM	1852.5 - 1907.5	4.5490	6.67	0.130	21.15	4M55D7W
	10MHz	QPSK	1855 - 1905	9.0586	5.03	0.389	25.90	9M06G7W
		16QAM	1856 - 1905	9.0776	5.90	0.348	25.41	9M08D7W
		64QAM	1857 - 1905	9.0647	6.46	0.258	24.11	9M06D7W
		256QAM	1858 - 1905	9.0561	6.68	0.130	21.13	9M06D7W
	15 MHz	QPSK	1857.5 - 1902.5	13.5502	4.99	0.379	25.79	13M6G7W
		16QAM	1857.5 - 1902.5	13.5619	5.90	0.327	25.15	13M6D7W
		64QAM	1857.5 - 1902.5	13.5852	6.47	0.258	24.12	13M6D7W
		256QAM	1857.5 - 1902.5	13.5602	6.69	0.125	20.96	13M6D7W
	20 MHz	QPSK	1860 - 1900	18.0466	4.92	0.386	25.87	18M0G7W
		16QAM	1860 - 1900	18.0964	5.84	0.346	25.39	18M1D7W
		64QAM	1860 - 1900	18.0566	6.45	0.262	24.19	18M1D7W
		256QAM	1860 - 1900	18.0393	6.69	0.126	20.99	18M0D7W
Band 25	1.4 MHz	QPSK	1850.7 - 1914.3	1.1058	5.00	0.386	25.87	1M11G7W
		16QAM	1850.7 - 1914.3	1.1167	5.82	0.316	24.99	1M12D7W
		64QAM	1850.7 - 1914.3	1.1054	6.44	0.248	23.95	1M11D7W
		256QAM	1850.7 - 1914.3	1.1049	6.71	0.125	20.98	1M10D7W
	3 MHz	QPSK	1851.5 - 1913.5	2.7239	4.67	0.377	25.76	2M72G7W
		16QAM	1851.5 - 1913.5	2.7350	5.72	0.325	25.12	2M73D7W
		64QAM	1851.5 - 1913.5	2.7240	6.48	0.255	24.07	2M72D7W
		256QAM	1851.5 - 1913.5	2.7278	6.69	0.126	21.00	2M73D7W
	5 MHz	QPSK	1852.5 - 1912.5	4.5430	4.92	0.389	25.90	4M54G7W
		16QAM	1852.5 - 1912.5	4.5506	5.92	0.336	25.26	4M55D7W
		64QAM	1852.5 - 1912.5	4.5532	6.49	0.258	24.11	4M55D7W
		256QAM	1852.5 - 1912.5	4.5490	6.69	0.123	20.90	4M55D7W
	10 MHz	QPSK	1855 - 1910	9.0586	5.04	0.382	25.82	9M06G7W
		16QAM	1855 - 1910	9.0776	5.93	0.330	25.18	9M08D7W
		64QAM	1855 - 1910	9.0647	6.50	0.256	24.08	9M06D7W
		256QAM	1855 - 1910	9.0561	6.70	0.128	21.07	9M06D7W
	15 MHz	QPSK	1857.5 - 1907.5	13.5502	5.00	0.368	25.66	13M6G7W
		16QAM	1857.5 - 1907.5	13.5619	5.93	0.327	25.15	13M6D7W
		64QAM	1857.5 - 1907.5	13.5852	6.48	0.243	23.86	13M6D7W
		256QAM	1857.5 - 1907.5	13.5602	6.74	0.123	20.89	13M6D7W
	20 MHz	QPSK	1860 - 1905	18.0466	4.95	0.368	25.66	18M0G7W
		16QAM	1860 - 1905	18.0964	5.89	0.322	25.08	18M1D7W
		64QAM	1860 - 1905	18.0566	6.48	0.239	23.78	18M1D7W
		256QAM	1860 - 1905	18.0393	6.71	0.122	20.86	18M0D7W

EUT Overview

FCC ID: BCGA2995	 element	PART 24 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device			

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	OBW [MHz]	PAR at 0.1% [dB]	EIRP		Emission Designator
						Max. Power [W]	Max. Power [dBm]	
NR Band n2	5 MHz	π/2 BPSK	1852.5 - 1907.5	4.4798	4.02	0.387	25.88	4M48G7W
		QPSK	1852.5 - 1907.5	4.4963	5.41	0.389	25.90	4M50G7W
		16QAM	1852.5 - 1907.5	4.4748	6.45	0.305	24.84	4M47D7W
		64QAM	1852.5 - 1907.5	4.4968	6.72	0.244	23.88	4M50D7W
		256QAM	1852.5 - 1907.5	4.4853	6.82	0.125	20.98	4M49D7W
	10 MHz	π/2 BPSK	1855 - 1905	8.9686	4.28	0.389	25.90	8M97G7W
		QPSK	1855 - 1905	9.2796	5.67	0.389	25.90	9M28G7W
		16QAM	1855 - 1905	9.2205	6.28	0.297	24.73	9M22D7W
		64QAM	1855 - 1905	9.2753	6.57	0.245	23.90	9M28D7W
		256QAM	1855 - 1905	9.2707	6.71	0.126	20.99	9M27D7W
	15 MHz	π/2 BPSK	1857.5 - 1902.5	13.3966	4.18	0.387	25.88	13M4G7W
		QPSK	1857.5 - 1902.5	14.1684	5.46	0.389	25.90	14M2G7W
		16QAM	1857.5 - 1902.5	14.1458	6.27	0.308	24.88	14M1D7W
		64QAM	1857.5 - 1902.5	14.1678	6.70	0.245	23.90	14M2D7W
		256QAM	1857.5 - 1902.5	14.1039	6.65	0.126	21.00	14M1D7W
	20 MHz	π/2 BPSK	1860 - 1900	17.9078	4.29	0.389	25.90	17M9G7W
		QPSK	1860 - 1900	18.9797	5.57	0.389	25.90	19M0G7W
		16QAM	1860 - 1900	18.9309	6.31	0.306	24.86	18M9D7W
		64QAM	1860 - 1900	18.9057	6.75	0.240	23.81	18M9D7W
		256QAM	1860 - 1900	18.9622	6.72	0.124	20.94	19M0D7W
NR Band n25	5 MHz	π/2 BPSK	1852.5 - 1912.5	4.4798	3.98	0.382	25.82	4M48G7W
		QPSK	1852.5 - 1912.5	4.4963	5.32	0.389	25.90	4M50G7W
		16QAM	1852.5 - 1912.5	4.4748	6.43	0.305	24.84	4M47D7W
		64QAM	1852.5 - 1912.5	4.4968	6.60	0.245	23.89	4M50D7W
		256QAM	1852.5 - 1912.5	4.4853	6.56	0.125	20.96	4M49D7W
	10 MHz	π/2 BPSK	1855 - 1910	8.9686	4.27	0.389	25.90	8M97G7W
		QPSK	1855 - 1910	9.2796	5.61	0.385	25.85	9M28G7W
		16QAM	1855 - 1910	9.2205	6.25	0.305	24.84	9M22D7W
		64QAM	1855 - 1910	9.2753	6.55	0.246	23.91	9M28D7W
		256QAM	1855 - 1910	9.2707	6.54	0.125	20.97	9M27D7W
	15 MHz	π/2 BPSK	1857.5 - 1907.5	13.3966	4.09	0.385	25.86	13M4G7W
		QPSK	1857.5 - 1907.5	14.1684	5.44	0.389	25.90	14M2G7W
		16QAM	1857.5 - 1907.5	14.1458	6.24	0.305	24.84	14M1D7W
		64QAM	1857.5 - 1907.5	14.1678	6.49	0.243	23.86	14M2D7W
		256QAM	1857.5 - 1907.5	14.1039	6.52	0.126	20.99	14M1D7W
	20 MHz	π/2 BPSK	1860 - 1905	17.9078	4.19	0.387	25.88	17M9G7W
		QPSK	1860 - 1905	18.9797	5.54	0.389	25.90	19M0G7W
		16QAM	1860 - 1905	18.9309	6.20	0.310	24.92	18M9D7W
		64QAM	1860 - 1905	18.9057	6.58	0.244	23.88	18M9D7W
		256QAM	1860 - 1905	18.9622	6.66	0.126	20.99	19M0D7W
	25 MHz	π/2 BPSK	1862.5 - 1902.5	22.8871	4.04	0.389	25.90	22M9G7W
		QPSK	1862.5 - 1902.5	23.8177	5.39	0.387	25.88	23M8G7W
		16QAM	1862.5 - 1902.5	23.8640	6.23	0.308	24.89	23M9D7W
		64QAM	1862.5 - 1902.5	23.8137	6.59	0.243	23.85	23M8D7W
		256QAM	1862.5 - 1902.5	23.8715	6.67	0.126	21.00	23M9D7W
	30 MHz	π/2 BPSK	1865 - 1900	28.5905	4.25	0.386	25.87	28M6G7W
		QPSK	1865 - 1900	28.5694	5.60	0.389	25.90	28M6G7W
		16QAM	1865 - 1900	28.7056	6.36	0.306	24.86	28M7D7W
		64QAM	1865 - 1900	28.7538	6.65	0.238	23.76	28M8D7W
		256QAM	1865 - 1900	28.6984	6.67	0.126	20.99	28M7D7W
	35 MHz	π/2 BPSK	1867.5 - 1897.5	32.2338	4.31	0.389	25.90	32M2G7W
		QPSK	1867.5 - 1897.5	33.6575	5.75	0.383	25.83	33M7G7W
		16QAM	1867.5 - 1897.5	33.5468	6.43	0.308	24.88	33M5D7W
		64QAM	1867.5 - 1897.5	33.7025	6.56	0.245	23.90	33M7D7W
		256QAM	1867.5 - 1897.5	33.6062	6.71	0.124	20.93	33M6D7W
	40 MHz	π/2 BPSK	1870 - 1895	38.6098	4.31	0.389	25.90	38M6G7W
		QPSK	1870 - 1895	38.6698	5.66	0.384	25.84	38M7G7W
		16QAM	1870 - 1895	38.5084	6.36	0.310	24.91	38M5D7W
		64QAM	1870 - 1895	38.6033	6.64	0.245	23.90	38M6D7W
		256QAM	1870 - 1895	38.6771	6.68	0.126	21.02	38M7D7W

EUT Overview

FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device	Page 4 of 219	

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Materials Technology Test Location

These measurement tests were conducted at the Element Materials Technology facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element Materials Technology.

- Element Materials Technology is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Materials Technology TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Materials Technology facility is a registered (22831) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Agreements (MRAs).

FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device	Page 5 of 219

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID:BCGA2995**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 24.

Test Device Serial No.: WH6226Y7R5, D74GQ0GVJR, DVXJDXL1QN, H9HH5F000230000CFX

2.2 Device Capabilities

This device contains the following capabilities:

850/1700/1900 WCDMA/HSPA, Multi-band LTE, 5G NR (FR1), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, 802.11a/ax WIFI 6E, 802.15.4, Bluetooth (1x, EDR, LE1M, LE2M, HDR4, HDR8), NB UNII (1x, HDR4, HDR8), WPT

This device supports BT Beamforming

This device supports simultaneous transmission operations, which allows for multiple transmitters to transmit simultaneously on the same antenna. The table below shows all configurations possible.

Antenna	Simultaneous Tx Config	Bluetooth 2.4GHz	Thread	NB UNII	WLAN	WIFI 5GHz	WIFI 6GHz	LTE / FR1 NR		
		BDR, EDR, HDR4/8, LE1/2M	802.15.4	BDR, HDR4/8	802.11 b/g/n/ax	802.11 a/n/ac/ax	802.11 a/ax	LB	MB/HB	Ultra High Band
1a	Config 1	✓	✗	✗	✗	✗	✗	✗	✗	✓
1a	Config 2	✗	✗	✗	✓	✗	✗	✗	✗	✓
1a	Config 3	✗	✓	✗	✗	✗	✗	✗	✗	✓
1b	Config 4	✗	✗	✓	✗	✗	✗	✗	✓	✗
1b	Config 5	✗	✗	✗	✗	✓	✗	✗	✓	✗
1b	Config 6	✗	✗	✗	✗	✗	✓	✗	✓	✗
3a	Config 7	✗	✗	✗	✓	✗	✗	✗	✗	✓
3a	Config 8	✓	✗	✗	✗	✗	✗	✗	✗	✓
3a	Config 9	✗	✓	✗	✗	✗	✗	✗	✗	✓
3b	Config 10	✗	✗	✓	✗	✗	✗	✗	✓	✗
3b	Config 11	✗	✗	✗	✗	✓	✗	✗	✓	✗
3b	Config 12	✗	✗	✗	✗	✗	✓	✗	✓	✗
4	Config 13	✓	✗	✗	✗	✗	✗	✓	✗	✗
4	Config 14	✓	✗	✗	✗	✗	✗	✗	✓	✗
4	Config 15	✓	✗	✗	✗	✗	✗	✗	✗	✓
4	Config 16	✗	✓	✗	✗	✗	✗	✓	✗	✗
4	Config 17	✗	✓	✗	✗	✗	✗	✗	✓	✗
4	Config 18	✗	✓	✗	✗	✗	✗	✗	✗	✓

Table 2-1. Simultaneous Transmission Configurations

✓ = Support; ✗ = Not Support

Note:

All the above simultaneous transmission configurations have been tested and the worst-case configuration was found to be Config 14 and reported in RF Bluetooth, RF FCC Part 27b test reports.

Specific 2.4 GHz Wi-Fi antenna that can only transmit simultaneously with 2.4 GHz Bluetooth antenna is listed in the SAR test report. For BT (2.4 GHz), in both connected and disconnected modes, and Wi-Fi (2.4 GHz) – Wi-Fi max power will not exceed minimum of (13.5dBm, SAR max cap, Reg max cap) power. Bluetooth can simultaneously transmit with IEEE 802.11a/n/ac/ax 5/6 GHz on separate antenna.

FCC ID: BCGA2995	 element	PART 24 MEASUREMENT REPORT				Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device				

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

2.3 Antenna Description

The following antenna gains provided by the manufacturer were used for testing.

Band	Antenna Gain [dBi]			
	Antenna 3b	Antenna 1b	Antenna 4	Antenna 2
WCDMA 1900				
LTE Band 2/25	0.7	0.2	-1.6	-1.0
NR Band n2/n25				

Table 2-2. Highest Antenna Gain

2.4 Test Support Equipment

1	Apple MacBook Pro w/AC/DC Adapter	Model: A2141	S/N: C02H604EQ05D	
2	Apple USB-C Cable	Model: Spartan	S/N: GXK1336018XKTR024	
3	USB-C Cable w/ AC Adapter	Model: A246C Model: A2305	S/N: DWH80115BK826GV19 S/N: C4H95160004PF4F4V	
4	Apple Pencil	Model: A2538	S/N: KJ26TCFXJW	
5	DC Power Supply	Model: KPS3010D	S/N: N/A	

Table 2-3. Test Support Equipment

2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.26-2015, TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power and the worst case channel.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

2.6 Software and Firmware

The test was conducted with firmware version 22A312 installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device		Page 7 of 219

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the documents titled “American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services” (ANSI C63.26-2015 and TIA-603-E-2016) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

3.2 Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated spurious emissions measurements and calculations, conversion method is used per the formulas in KDB 971168 Section 5.8.4. Field Strength (EIRP) is calculated using the following formulas:

$$E_{\text{dB}\mu\text{V/m}} = \text{Measured amplitude level}_{\text{dBm}} + 107 + \text{Cable Loss}_{\text{dB}} + \text{Antenna Factor}_{\text{dB/m}}$$

And

$$\text{EIRP}_{\text{dBm}} = E_{\text{dB}\mu\text{V/m}} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014.

Per KDB 414788 D01 v01r01, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was used while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

Radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI C63.26-2015 and TIA-603-E-2016.

FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device	Page 8 of 219

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	2.07
Radiated Disturbance (<30MHz)	4.12
Radiated Disturbance (30MHz-1GHz)	4.85
Radiated Disturbance (1-18GHz)	5.08
Radiated Disturbance (>18GHz)	5.22

FCC ID: BCGA2995	 element		
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device	Approved by: Technical Manager

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
ATM	180-442A-KF	20dB Nominal Gain Horn Antenna	3/14/2024	Annual	3/14/2025	T058701-01
ESPEC	SU-241	Tabletop Temperature Chamber	11/17/2023	Annual	11/17/2024	92009574
ETS-Lindgren	3117	Double Ridged Guide Antenna (1-18 GHz)	4/9/2024	Annual	4/9/2025	00218555
Fairview Microwave	FMCA1975-36	30MHz-40GHz Conducted Cable *	6/10/2024	Annual	6/10/2025	-
Fairview Microwave	M2CP1122-10	30MHz-40GHz Conducted Coupler *	6/10/2024	Annual	6/10/2025	1946
Keysight Technology	N9040B	UXA Signal Analyzer	5/28/2024	Annual	5/28/2025	MY57212015
Rohde & Schwarz	FSW67	Signal and Spectrum Analyzer (2Hz-67GHz)	7/5/2024	Annual	7/5/2025	101366
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz - 18GHz)	8/15/2023	Annual	8/15/2024	101639
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	5/29/2024	Annual	5/29/2025	101619
Rohde & Schwarz	ESW44	EMI Test Receiver	5/1/2024	Annual	5/1/2025	101867
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	7/3/2024	Annual	7/3/2025	102356
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	11/30/2023	Annual	11/30/2024	161616
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	12/27/2023	Annual	12/27/2024	164715
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	6/10/2024	Annual	6/10/2025	100057
Rohde & Schwarz	HFH2-Z2	Loop Antenna	6/21/2024	Annual	6/21/2025	100519
Rohde & Schwarz	ENV216	Two-Line V-Network	4/24/2024	Annual	4/24/2025	101364
Schwarzbeck	VULB 9162	Bilog Antenna (30MHz - 6GHz)	4/29/2024	Annual	4/29/2025	00304

Table 5-1. Test Equipment

Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. * denotes passive equipment that has been internally verified/calibrated.

FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device		Page 10 of 219

6.0 SAMPLE CALCULATIONS

Emission Designator

WCDMA Emission Designator

Emission Designator = 4M16F9W

WCDMA BW = 4.16 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

$\pi/2$ BPSK / QPSK Modulation

Emission Designator = 8M62G7W

BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination of Any

QAM Modulation

Emission Designator = 8M45D7W

BW = 8.45 MHz

D = Amplitude/Angle Modulated

7 = Quantized/Digital Info

W = Combination of Any

Spurious Radiated Emission

Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm $- (-24.80) = 50.3$ dBc.

FCC ID: BCGA2995	 element			PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device			Page 11 of 219

7.0 TEST RESULTS

7.1 Summary

Company Name: Apple Inc.
 FCC ID: BCGA2995
 FCC Classification: PCS Licensed Transmitter (PCB)
 Mode(s): WCDMA/LTE/NR

Test Condition	Test Description	FCC Part Section(s)	Test Limit	Test Result	Reference
CONDUCTED	Occupied Bandwidth	2.1049	N/A	N/A	Section 7.2
	Conducted Band Edge / Spurious Emissions	2.1051, 24.238(a)	-13 dBm at Band Edge and for all out-of-band emissions	PASS	Sections 7.3, 7.4
	Peak-Average Ratio	24.232(d)	< 13 dB	PASS	Section 7.5
	Transmitter Conducted Output Power	2.1046	N/A	N/A	See RF Exposure Report
	Frequency Stability	2.1055, 24.235	Fundamental emissions stay within authorized frequency block over the temperature and voltage range as tested	PASS	Section 7.8
	Effective Radiated Power / Equivalent Isotropic Radiated Power	24.232(c)	< 2 Watts max. EIRP	PASS	Section 7.6
RADIATED	Radiated Spurious Emissions	2.1053, 24.238(a)	-13 dBm for all out-of-band emissions	PASS	Section 7.7

Table 7-1. Summary of Test Results

Notes:

1. All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
2. The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
3. All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
4. All conducted emissions measurements are performed with automated test software to capture the corresponding plots necessary to show compliance. The measurement software utilized is Element EMC Software Tool EMC Software Tool v1.1.

FCC ID: BCGA2995	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device		Page 12 of 219

7.2 Occupied Bandwidth

§2.1049

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section. All ports were tested and only the worst case data were reported.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device	Page 13 of 219

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

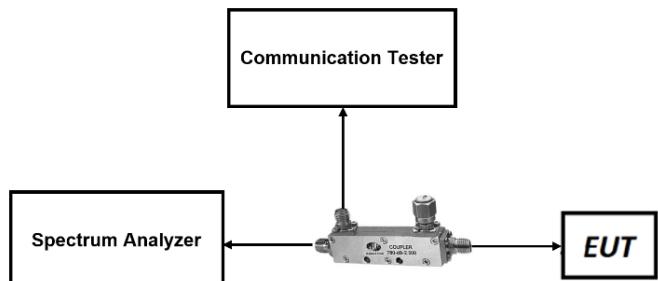


Figure 7-1. LTE Test Instrument & Measurement Setup





Figure 7-2. FR1 Test Instrument & Measurement Setup

Test Notes


None.

FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device	Page 14 of 219

LTE Band 25/2

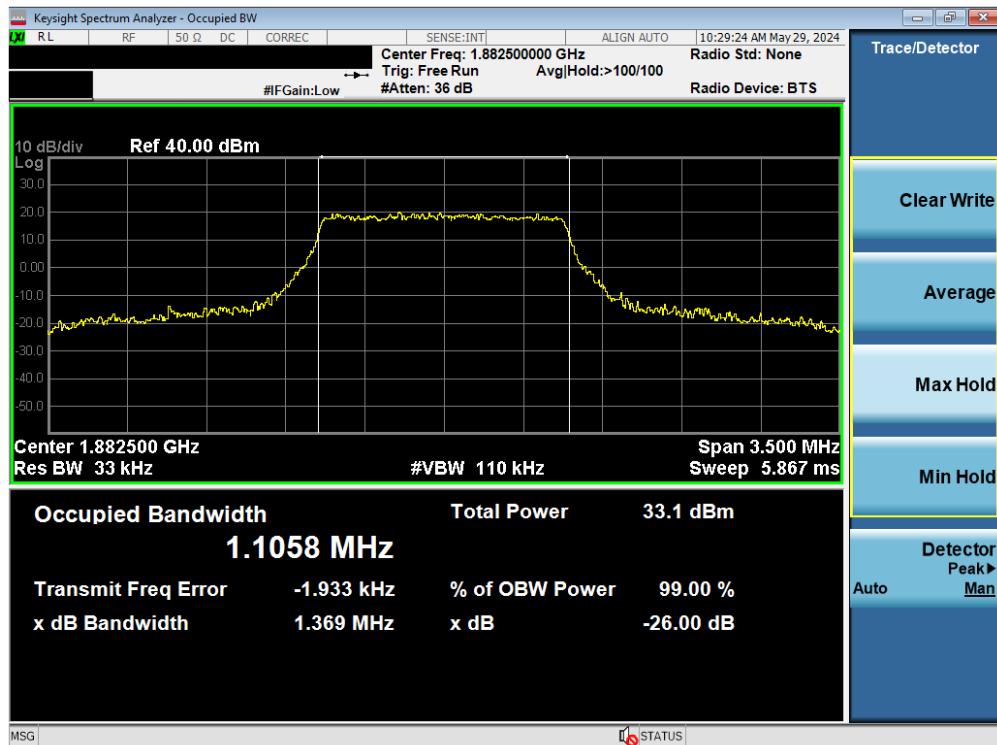


Plot 7-1. Occupied Bandwidth Plot (LTE Band 25/2 - 1.4MHz QPSK - Full RB Configuration)

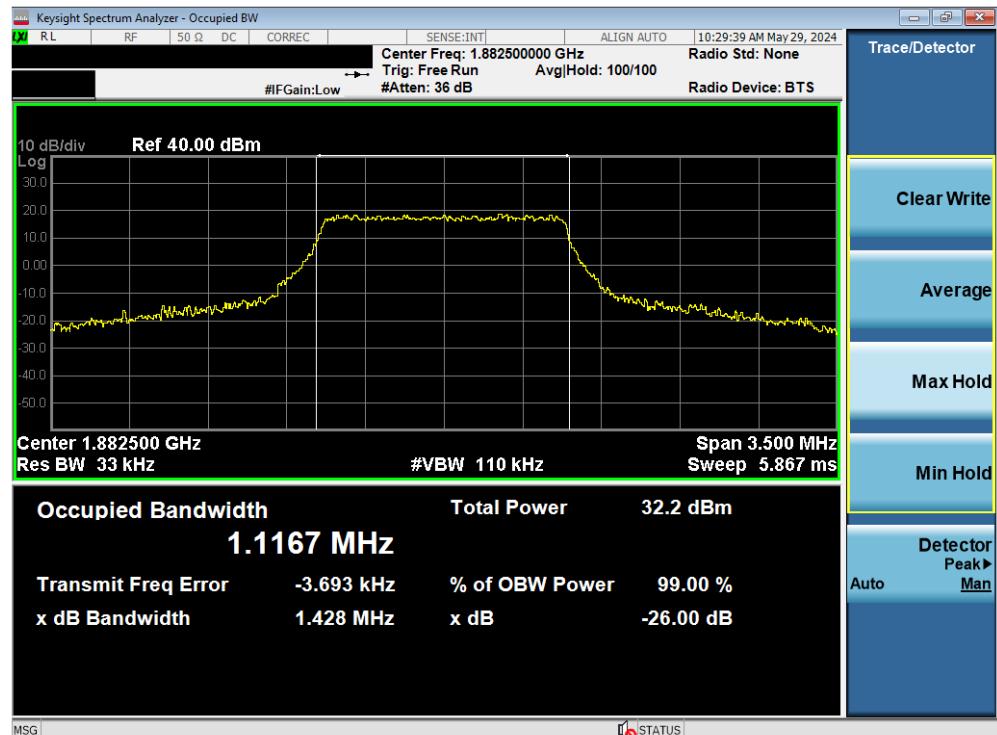


Plot 7-2. Occupied Bandwidth Plot (LTE Band 25/2 - 1.4MHz 16-QAM - Full RB Configuration)

FCC ID: BCGA2995	 element		PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device		Page 15 of 219

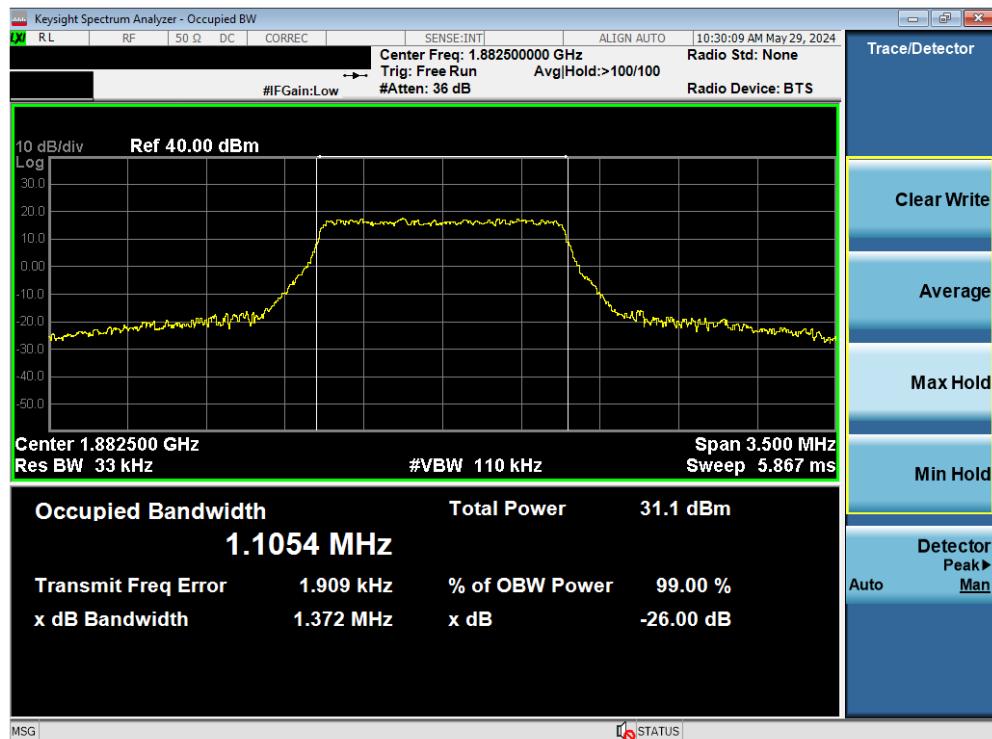


Plot 7-3. Occupied Bandwidth Plot (LTE Band 25/2 - 1.4MHz 64-QAM - Full RB Configuration)

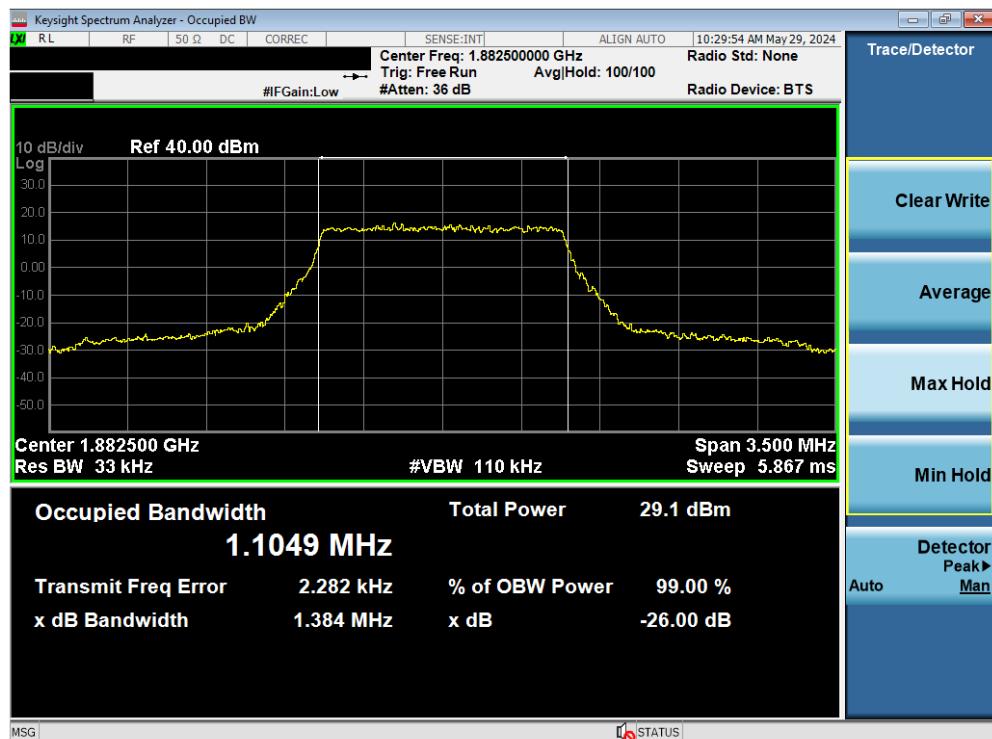

P6.lot 7-4. Occupied Bandwidth Plot (LTE Band 25/2 - 1.4MHz 256-QAM - Full RB Configuration)

FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device	Page 16 of 219

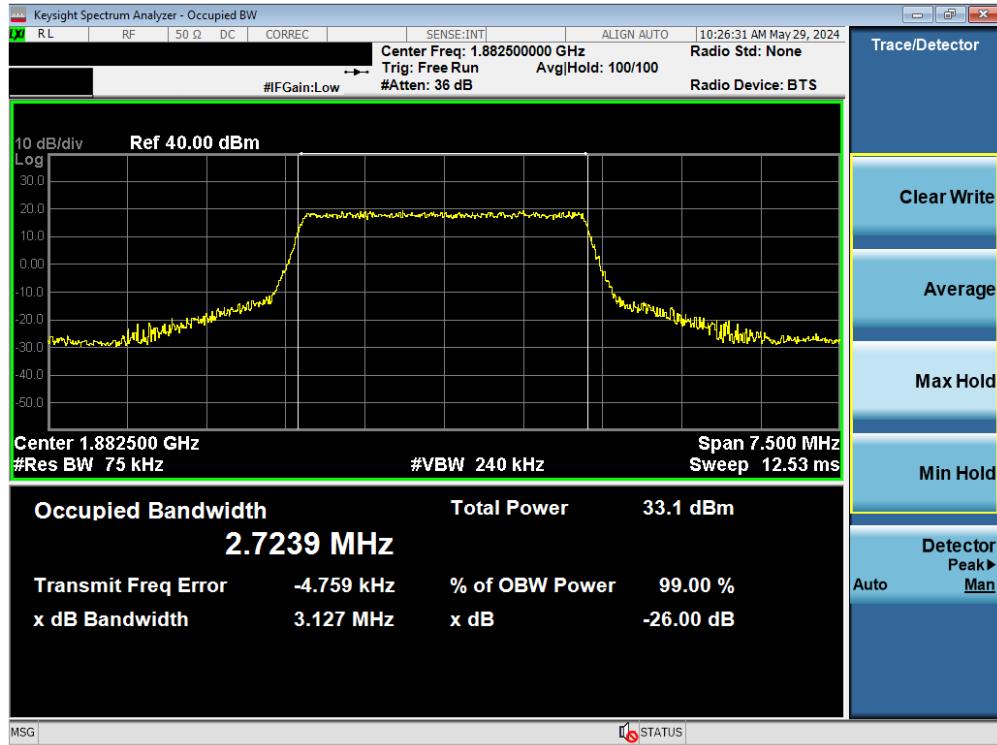

Plot 7-5. Occupied Bandwidth Plot (LTE Band 25/2 - 3MHz QPSK - Full RB Configuration)



Plot 7-6. Occupied Bandwidth Plot (LTE Band 25/2 - 3MHz 16-QAM - Full RB Configuration)

FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device		Page 17 of 219




Plot 7-7. Occupied Bandwidth Plot (LTE Band 25/2 - 3MHz 64-QAM - Full RB Configuration)



Plot 7-8. Occupied Bandwidth Plot (LTE Band 25/2 - 3MHz 256-QAM - Full RB Configuration)

FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device		Page 18 of 219

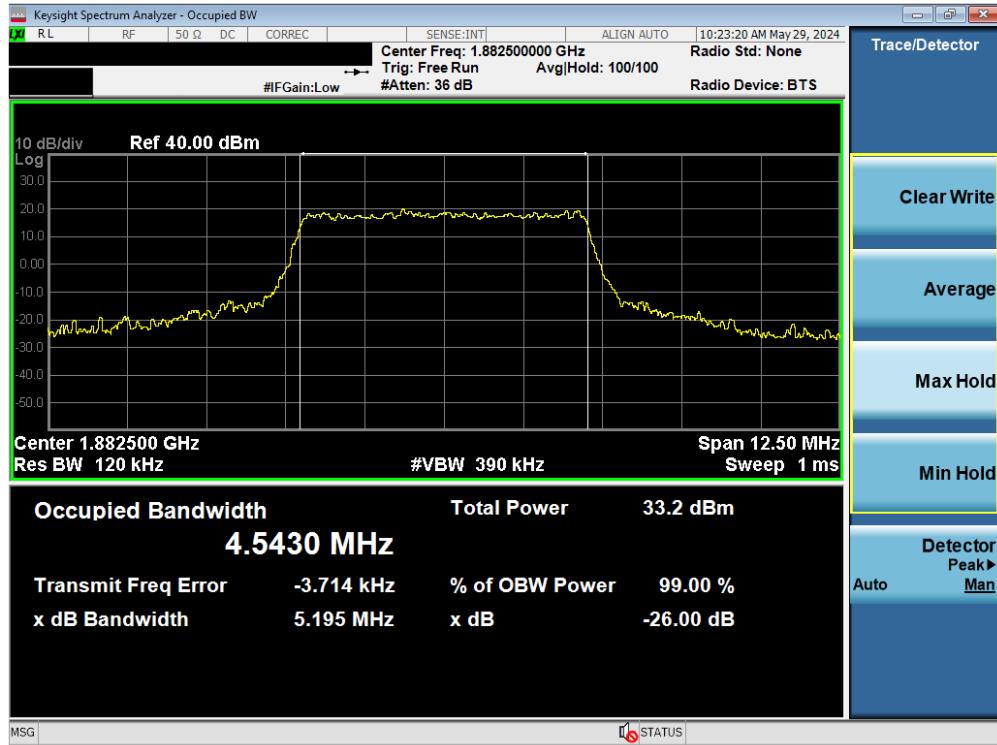

Plot 7-9. Occupied Bandwidth Plot (LTE Band 25/2 - 5MHz QPSK - Full RB Configuration)




Plot 7-10. Occupied Bandwidth Plot (LTE Band 25/2 - 5MHz 16-QAM - Full RB Configuration)

FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device		Page 19 of 219



Plot 7-11. Occupied Bandwidth Plot (LTE Band 25/2 - 5MHz 64-QAM - Full RB Configuration)

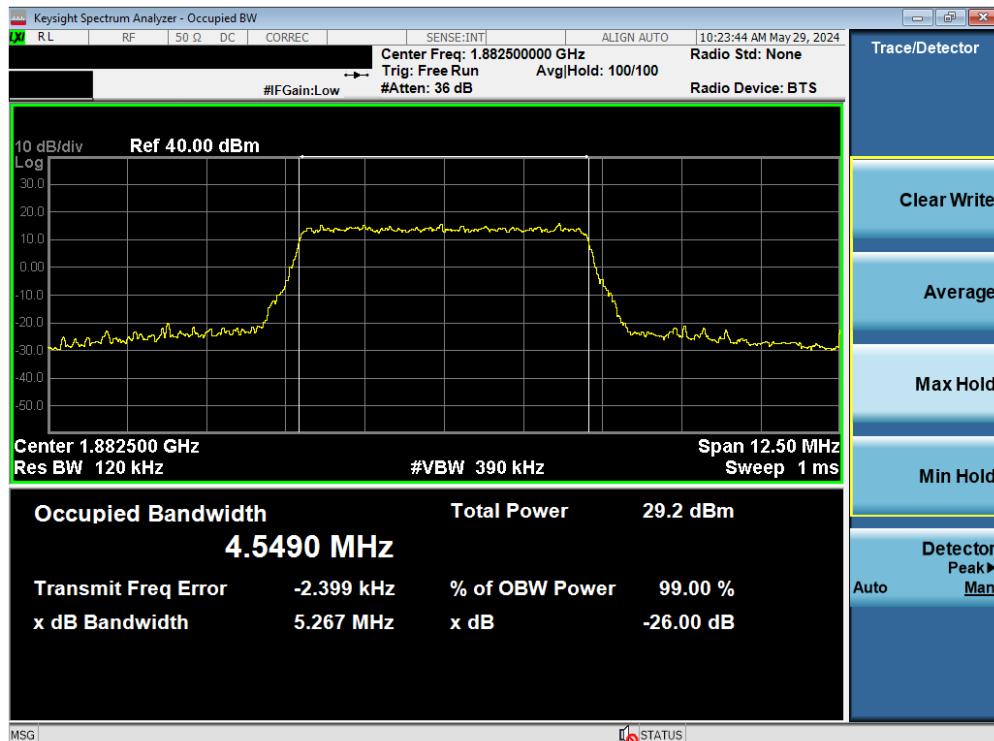

Plot 7-12. Occupied Bandwidth Plot (LTE Band 25/2 - 5MHz 256-QAM - Full RB Configuration)

FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device		Page 20 of 219




Plot 7-13. Occupied Bandwidth Plot (LTE Band 25/2 - 10MHz QPSK - Full RB Configuration)




Plot 7-14. Occupied Bandwidth Plot (LTE Band 25/2 - 10MHz 16-QAM - Full RB Configuration)

FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device		Page 21 of 219

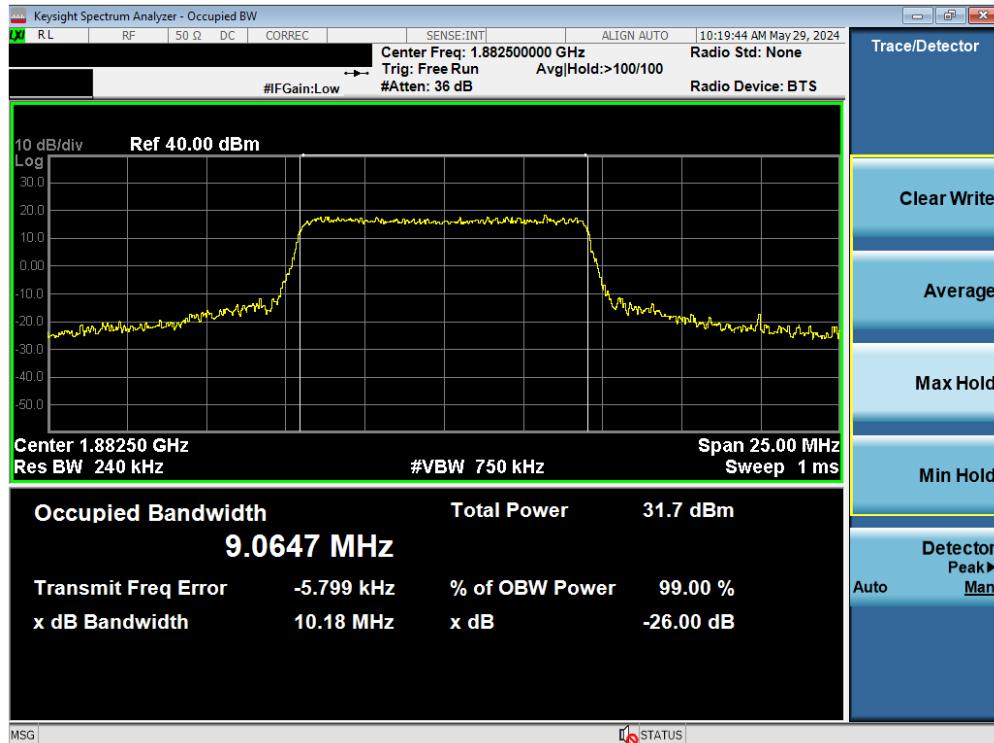

Plot 7-15. Occupied Bandwidth Plot (LTE Band 25/2 - 10MHz 64-QAM - Full RB Configuration)

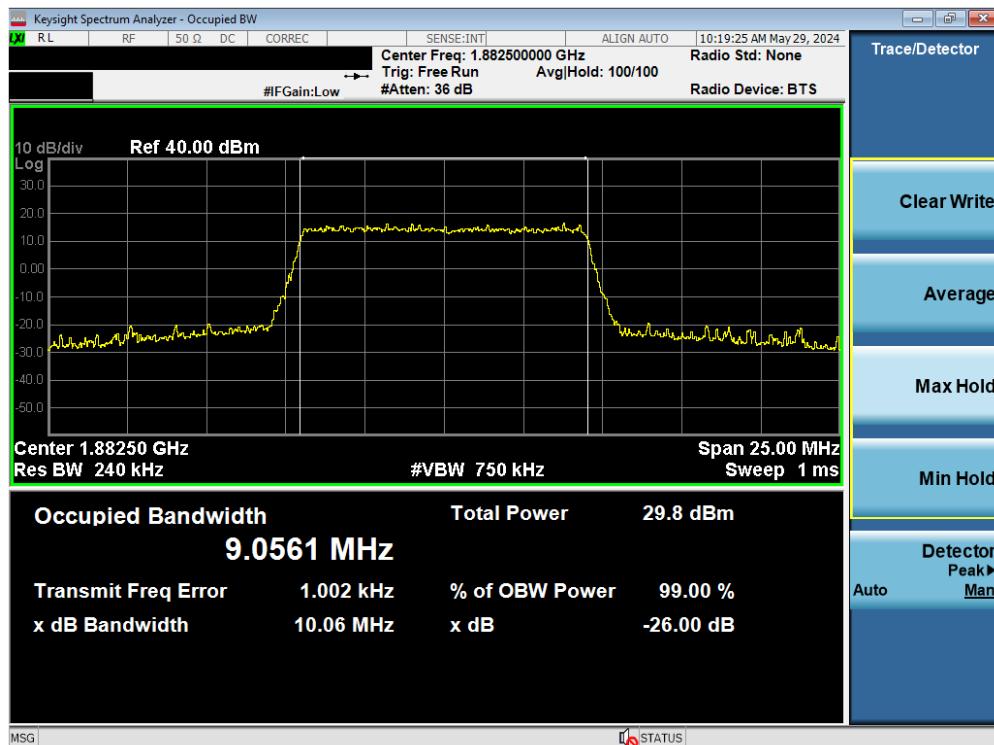


Plot 7-16. Occupied Bandwidth Plot (LTE Band 25/2 - 10MHz 256-QAM - Full RB Configuration)

FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device		Page 22 of 219



Plot 7-17. Occupied Bandwidth Plot (LTE Band 25/2 - 15MHz QPSK - Full RB Configuration)

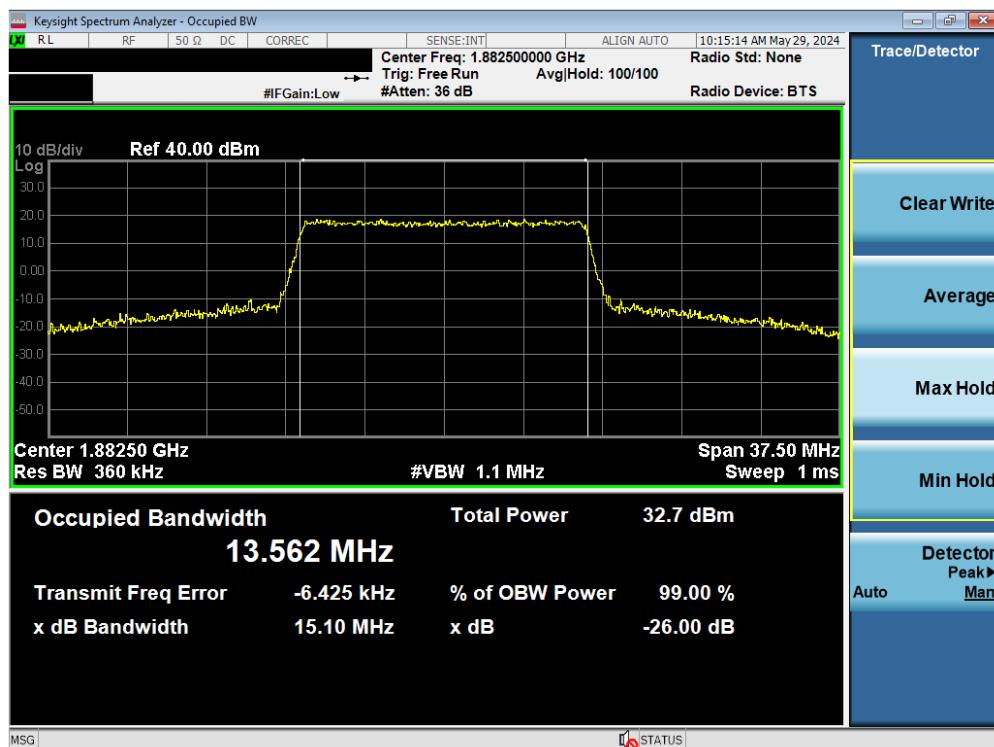


Plot 7-18. Occupied Bandwidth Plot (LTE Band 25/2 - 15MHz 16-QAM - Full RB Configuration)

FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device		Page 23 of 219



Plot 7-19. Occupied Bandwidth Plot (LTE Band 25/2 - 15MHz 64-QAM - Full RB Configuration)

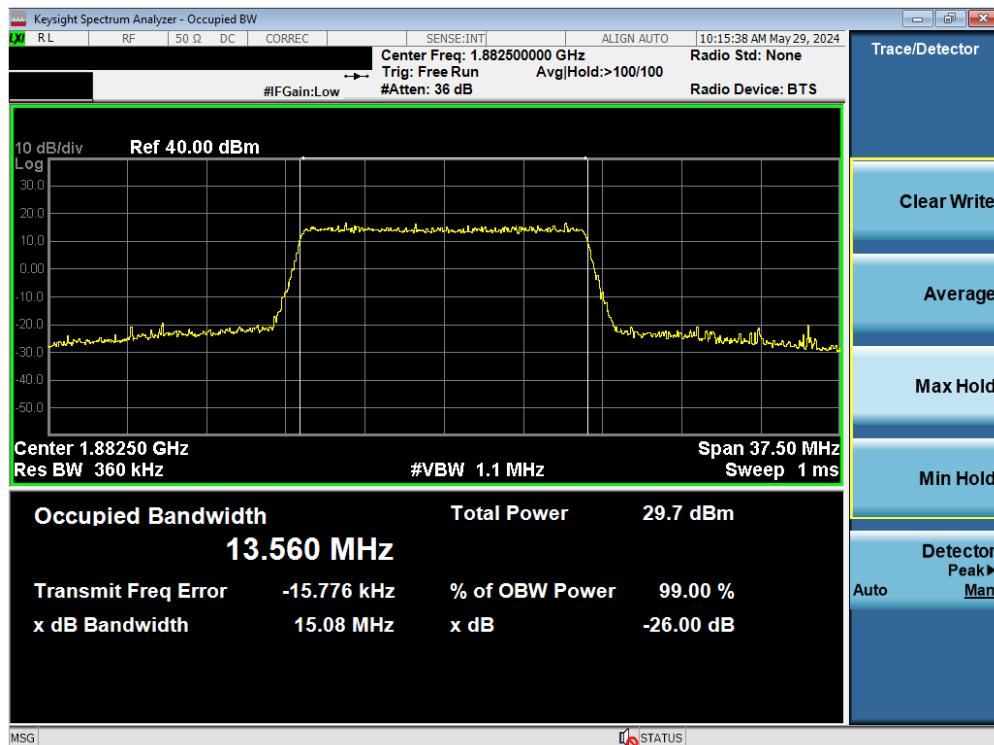


Plot 7-20. Occupied Bandwidth Plot (LTE Band 25/2 - 15MHz 256-QAM - Full RB Configuration)

FCC ID: BCGA2995	element		PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device		Page 24 of 219




Plot 7-21. Occupied Bandwidth Plot (LTE Band 25/2 - 20MHz QPSK - Full RB Configuration)

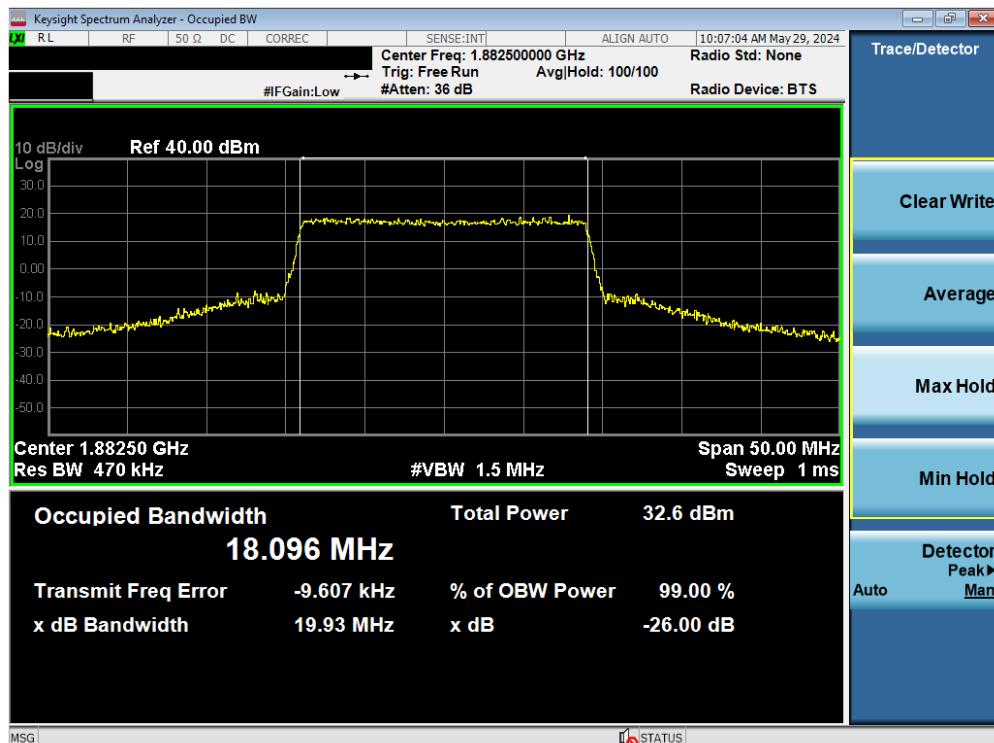


Plot 7-22. Occupied Bandwidth Plot (LTE Band 25/2 - 20MHz 16-QAM - Full RB Configuration)

FCC ID: BCGA2995	 element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device	Page 25 of 219

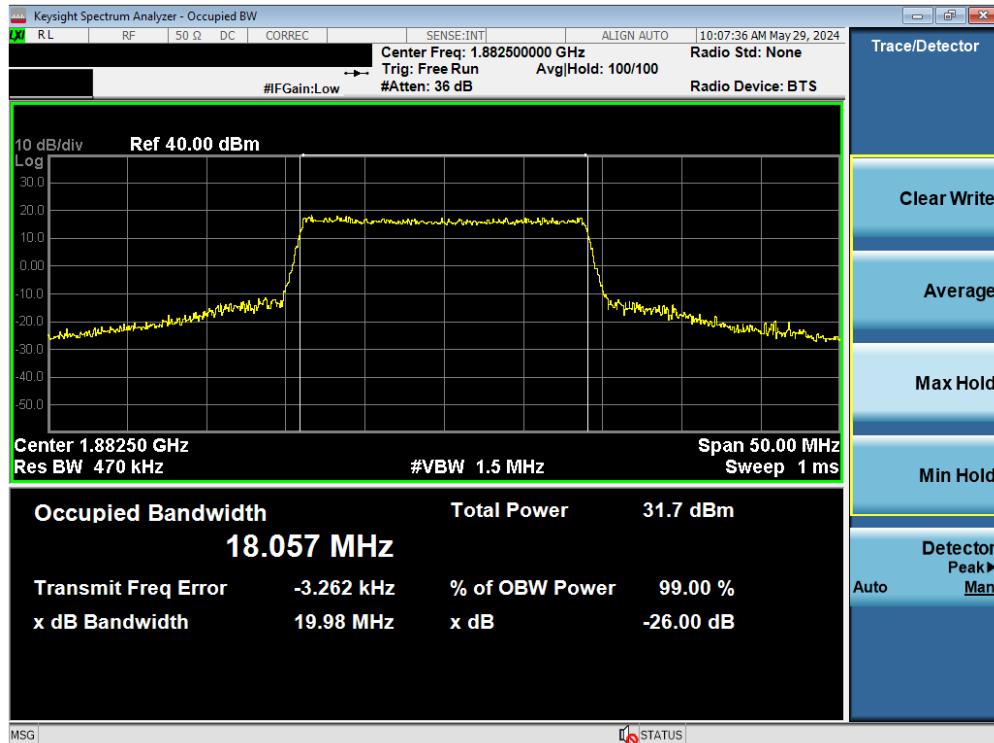

Plot 7-23. Occupied Bandwidth Plot (LTE Band 25/2 - 20MHz 64-QAM - Full RB Configuration)

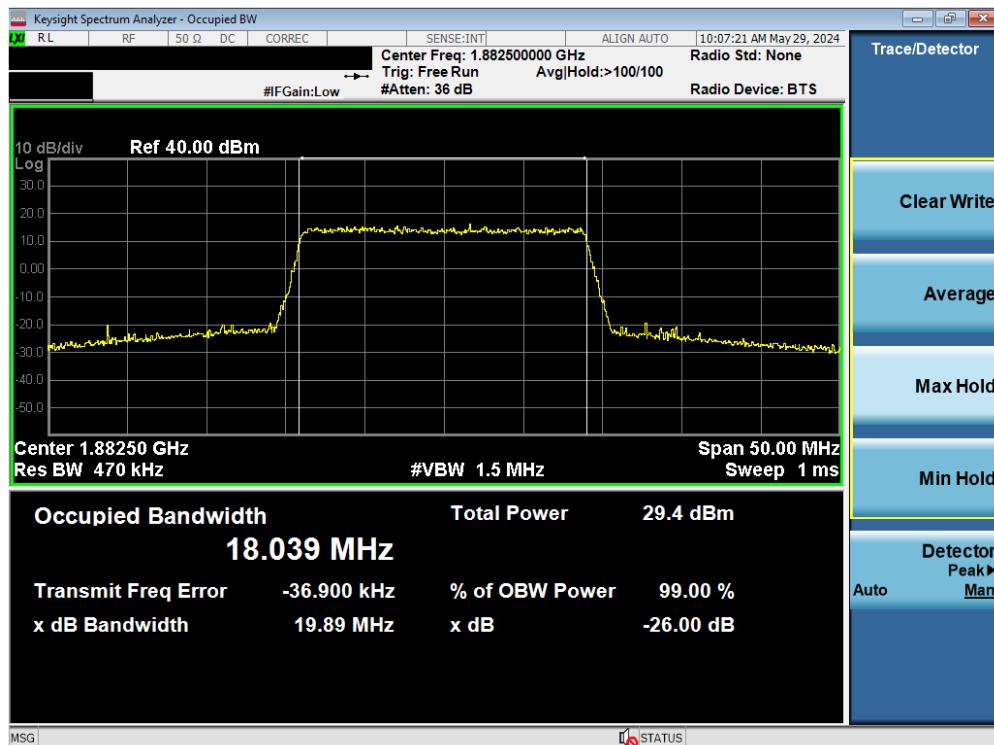

Plot 7-24. Occupied Bandwidth Plot (LTE Band 25/2 - 20MHz 256-QAM - Full RB Configuration)

FCC ID: BCGA2995	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device		Page 26 of 219

NR Band n25/n2





Plot 7-25. Occupied Bandwidth Plot (NR Band n25/n2 - 5MHz DFT-s-OFDM $\pi/2$ BPSK - Full RB)



Plot 7-26. Occupied Bandwidth Plot (NR Band n25/n2 - 5MHz CP-OFDM QPSK - Full RB)

FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT		
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device	Approved by: Technical Manager

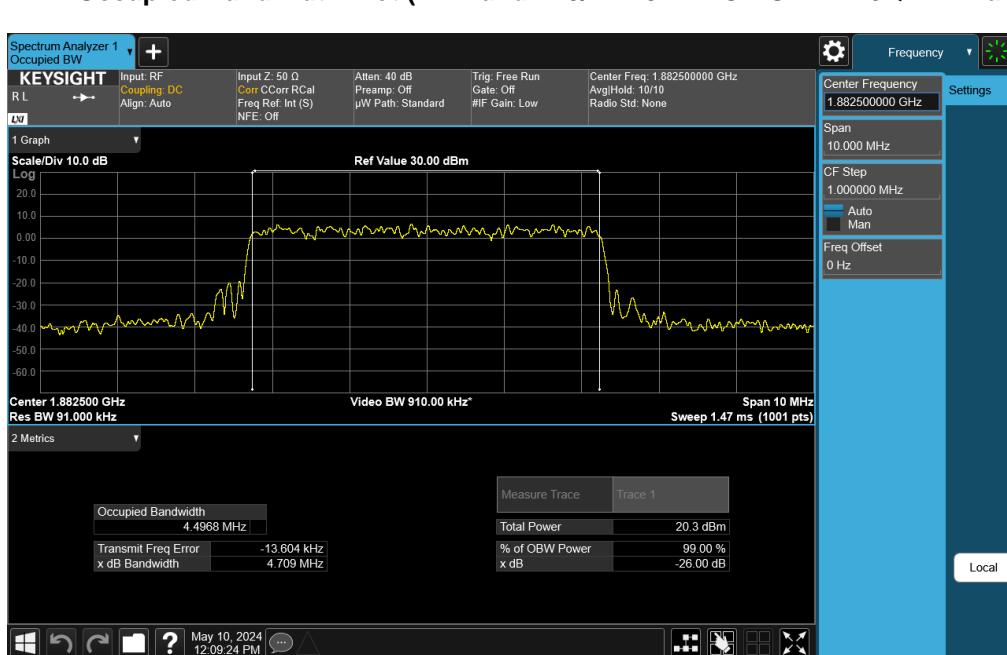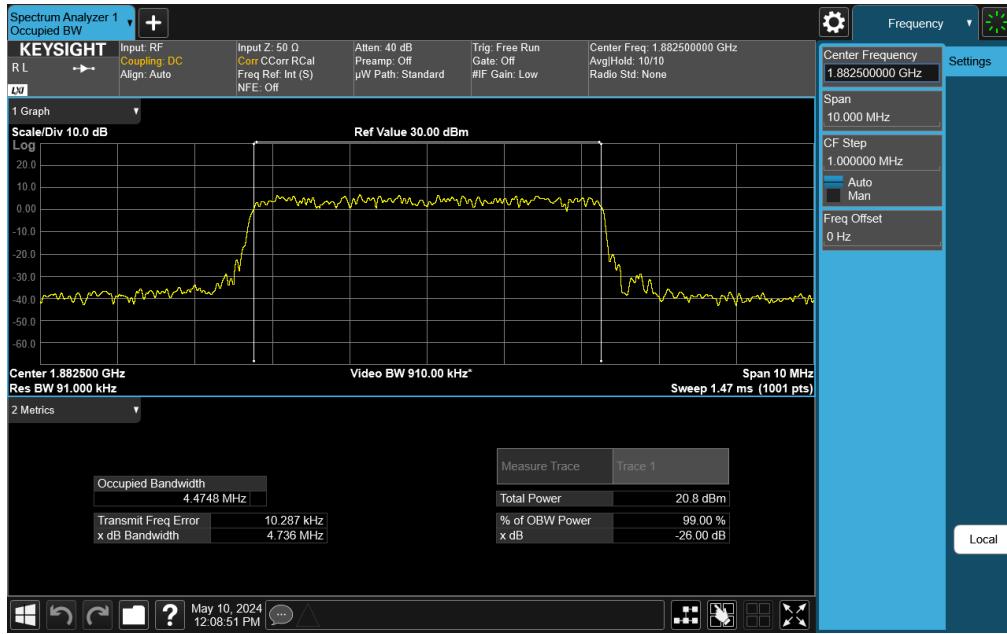

FCC ID: BCGA2995	 PART 24 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device		Page 28 of 219




Plot 7-29. Occupied Bandwidth Plot (NR Band n25/n2 - 5MHz CP-OFDM 256QAM - Full RB)




Plot 7-30. Occupied Bandwidth Plot (NR Band n25/n2 - 10MHz DFT-s-OFDM π/2 BPSK - Full RB)


FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device		Page 29 of 219

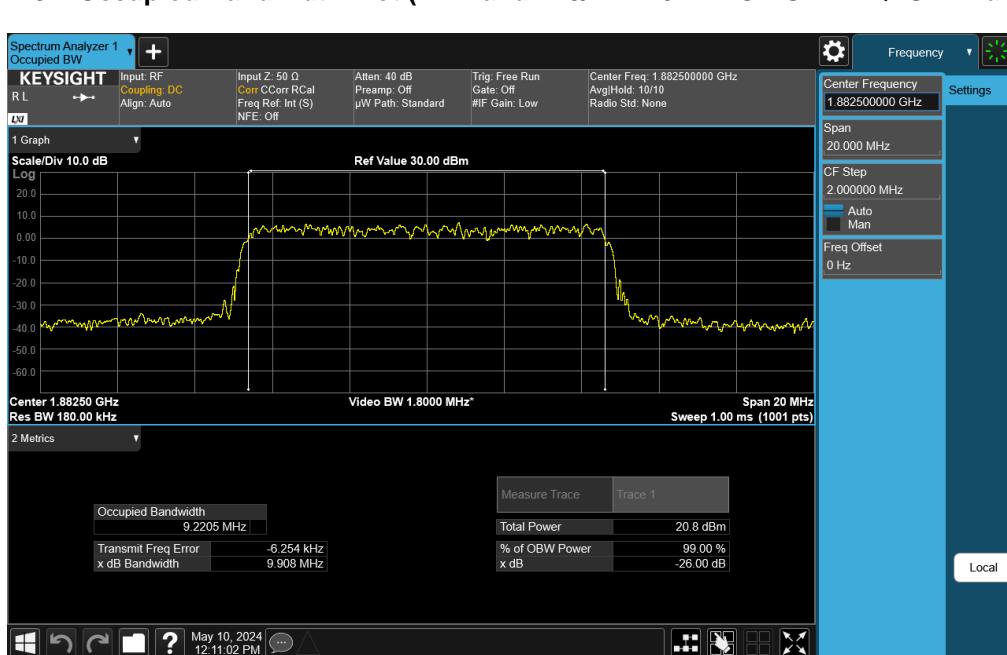

FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device		Page 30 of 219

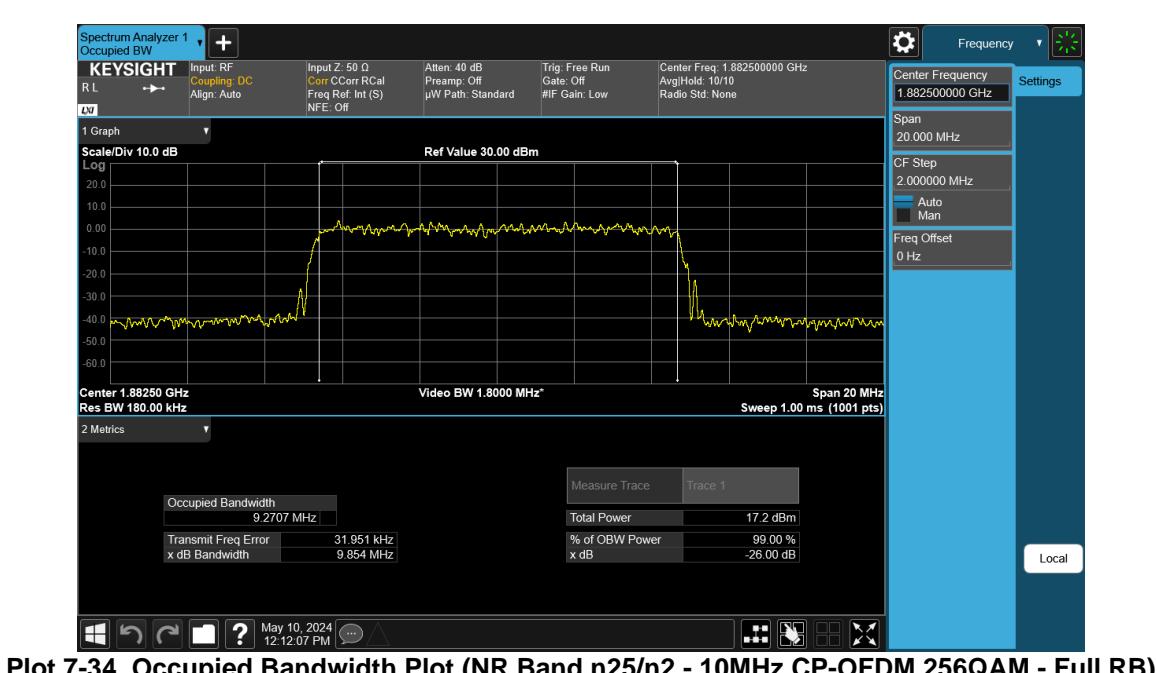

FCC ID: BCGA2995	element PART 24 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device		Page 31 of 219

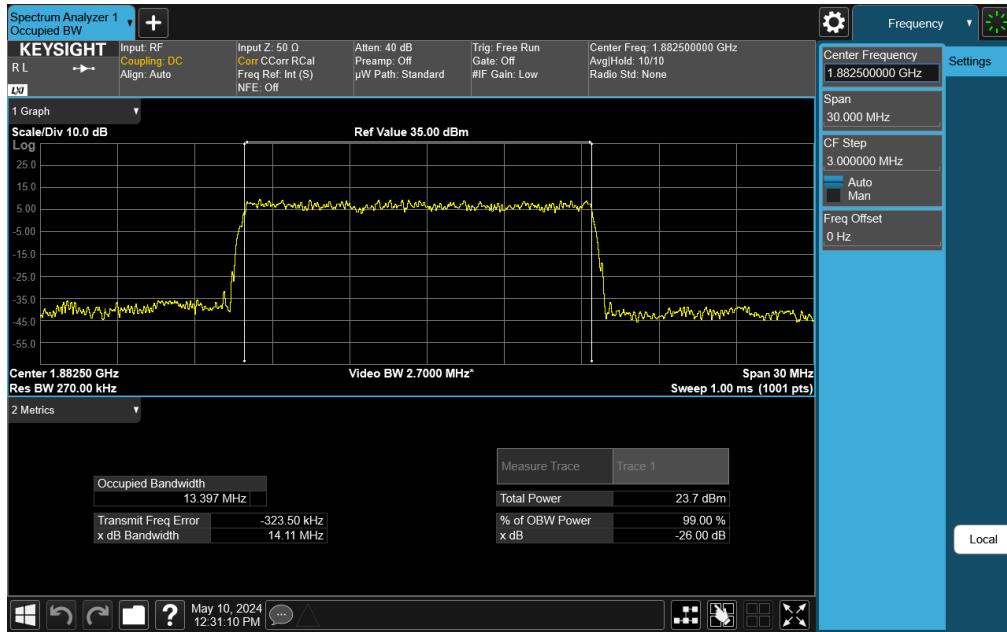


Plot 7-35. Occupied Bandwidth Plot (NR Band n25/n2 - 15MHz DFT-s-OFDM $\pi/2$ BPSK - Full RB)



Plot 7-36. Occupied Bandwidth Plot (NR Band n25/n2 - 15MHz CP-OFDM QPSK - Full RB)

FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device	Page 32 of 219

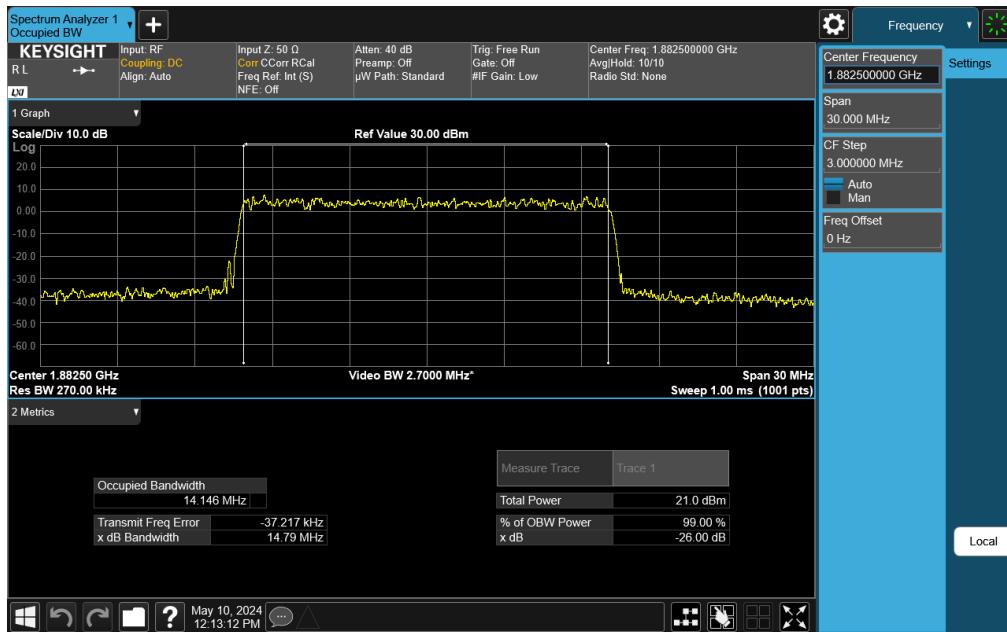

Plot 7-37. Occupied Bandwidth Plot (NR Band n25/n2 - 15MHz CP-OFDM 16QAM - Full RB)



Plot 7-38. Occupied Bandwidth Plot (NR Band n25/n2 - 15MHz CP-OFDM 64QAM - Full RB)

FCC ID: BCGA2995	element PART 24 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device		Page 33 of 219



Plot 7-39. Occupied Bandwidth Plot (NR Band n25/n2 - 15MHz CP-OFDM 256QAM - Full RB)



Plot 7-40. Occupied Bandwidth Plot (NR Band n25/n2 - 20MHz DFT-s-OFDM π/2 BPSK - Full RB)

FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device	Page 34 of 219




Plot 7-41. Occupied Bandwidth Plot (NR Band n25/n2 - 20MHz CP-OFDM QPSK - Full RB)




Plot 7-42. Occupied Bandwidth Plot (NR Band n25/n2 - 20MHz CP-OFDM 16QAM - Full RB)

FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device		Page 35 of 219

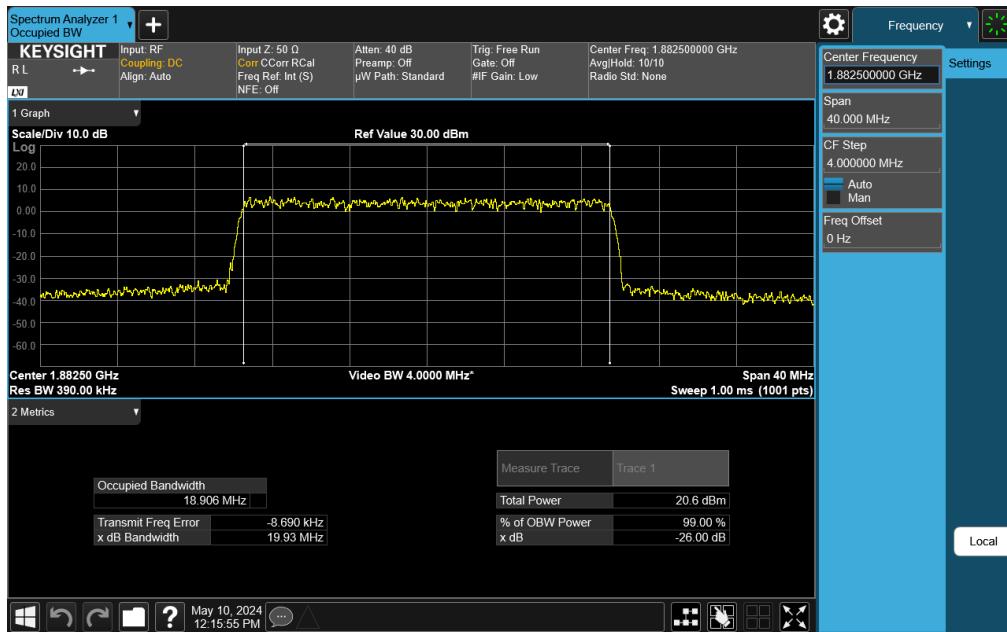

Plot 7-43. Occupied Bandwidth Plot (NR Band n25/n2 - 20MHz CP-OFDM 64QAM - Full RB)

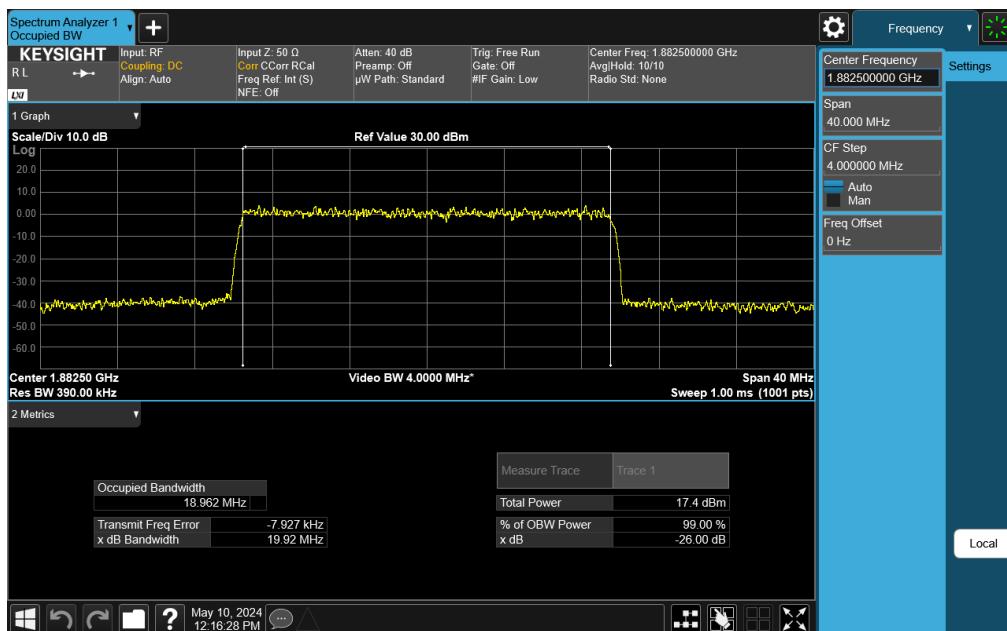


Plot 7-44. Occupied Bandwidth Plot (NR Band n25/n2 - 20MHz CP-OFDM 256QAM - Full RB)

FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device		Page 36 of 219





Plot 7-45. Occupied Bandwidth Plot (NR Band n25 - 25MHz DFT-s-OFDM $\pi/2$ BPSK - Full RB)

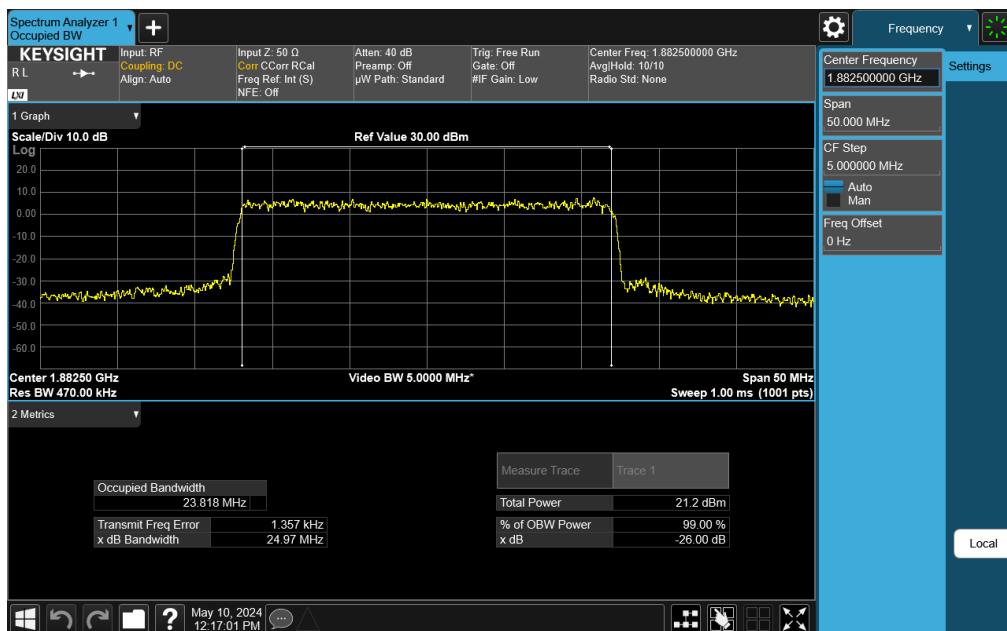


Plot 7-46. Occupied Bandwidth Plot (NR Band n25 - 25MHz CP-OFDM QPSK - Full RB)


FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device		Page 37 of 219

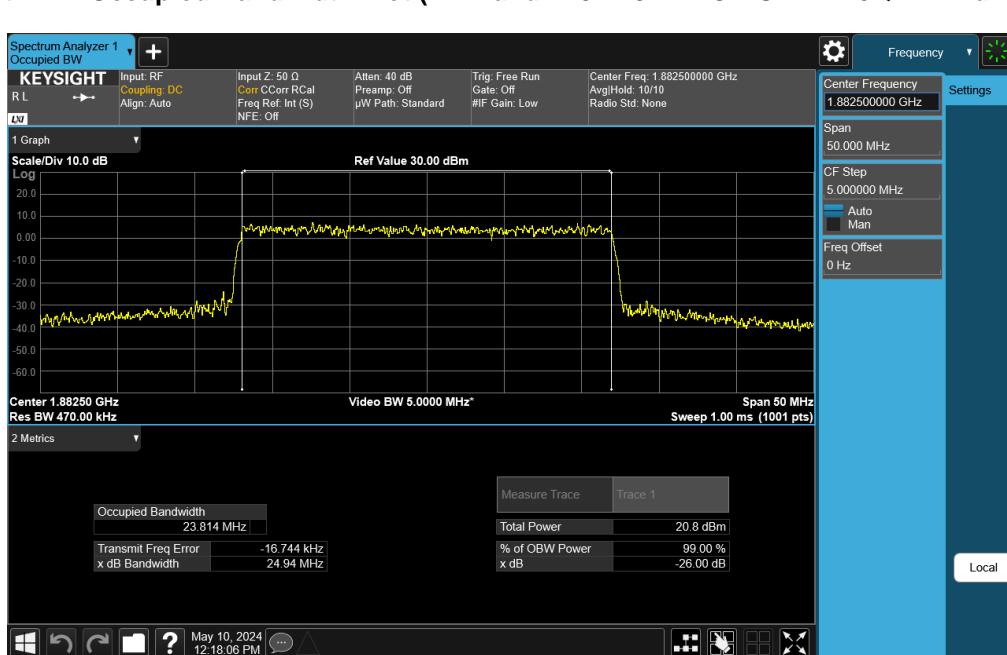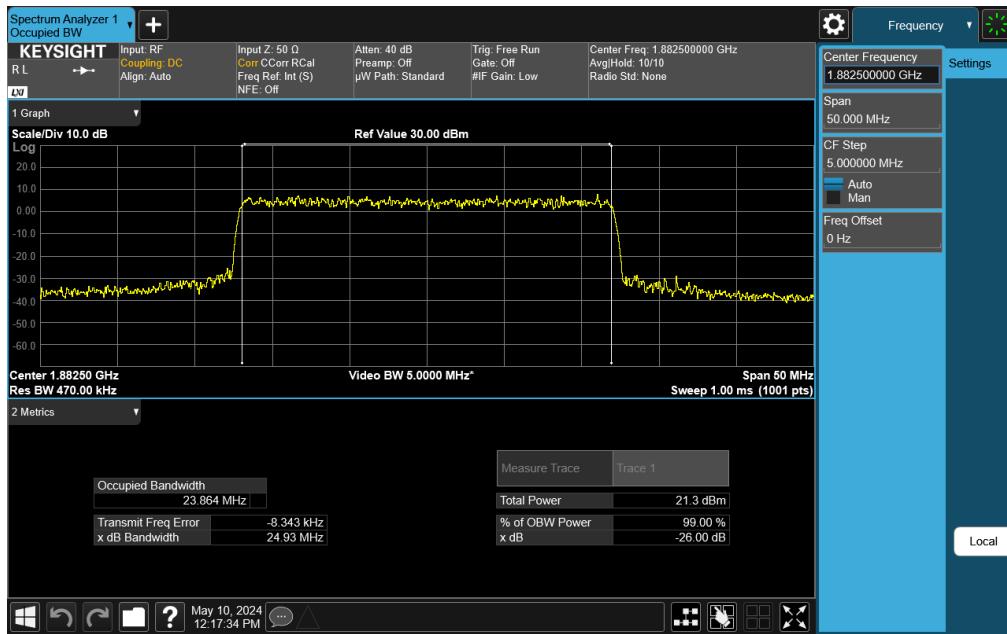

FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device		Page 38 of 219

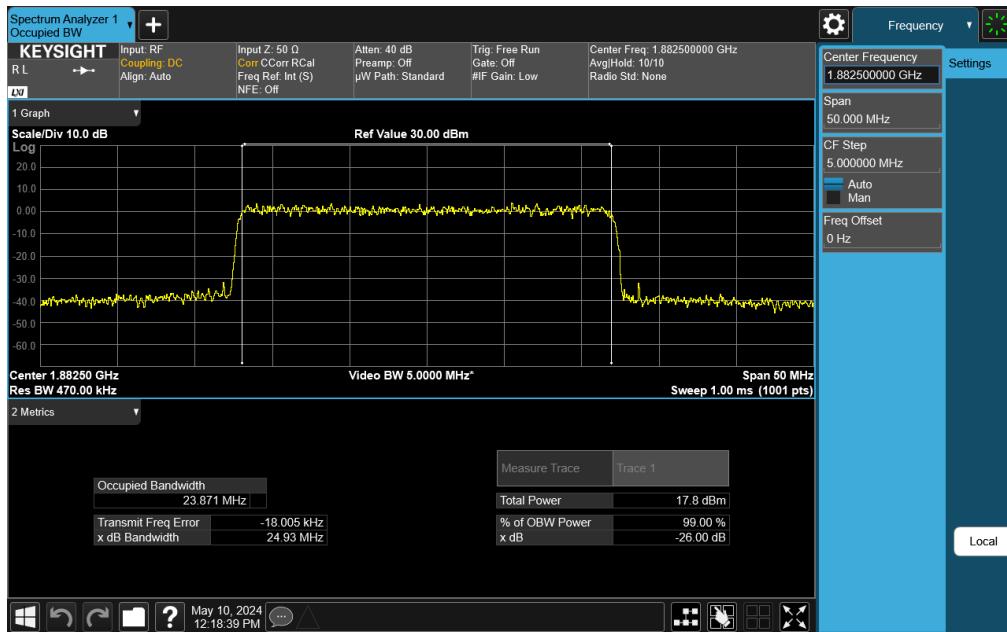


Plot 7-49. Occupied Bandwidth Plot (NR Band n25 - 25MHz CP-OFDM 256QAM - Full RB)

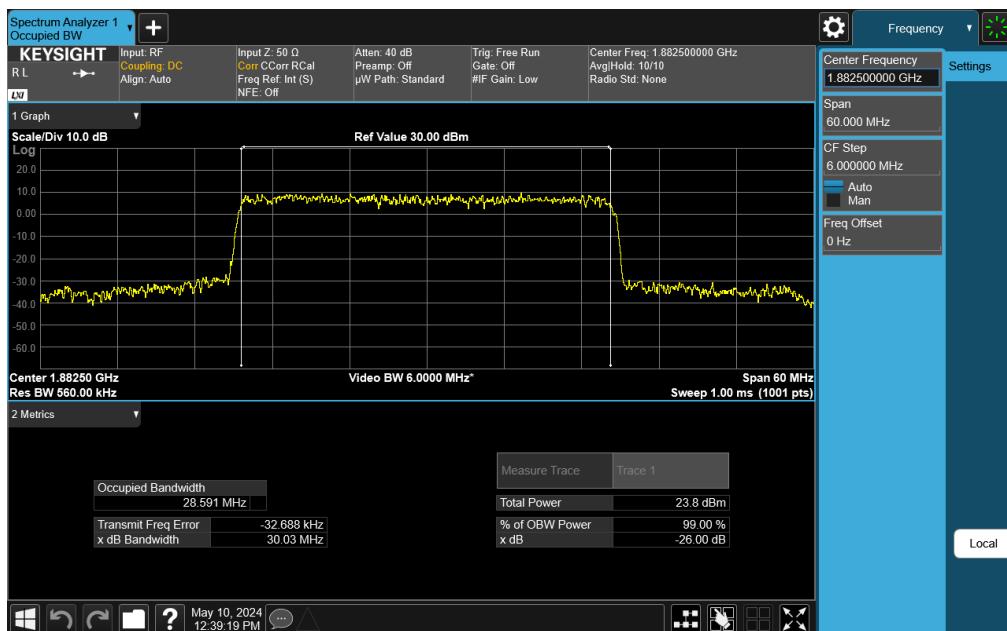

Plot 7-50. Occupied Bandwidth Plot (NR Band n25 - 30MHz DFT-s-OFDM π/2 BPSK - Full RB)

FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device		Page 39 of 219

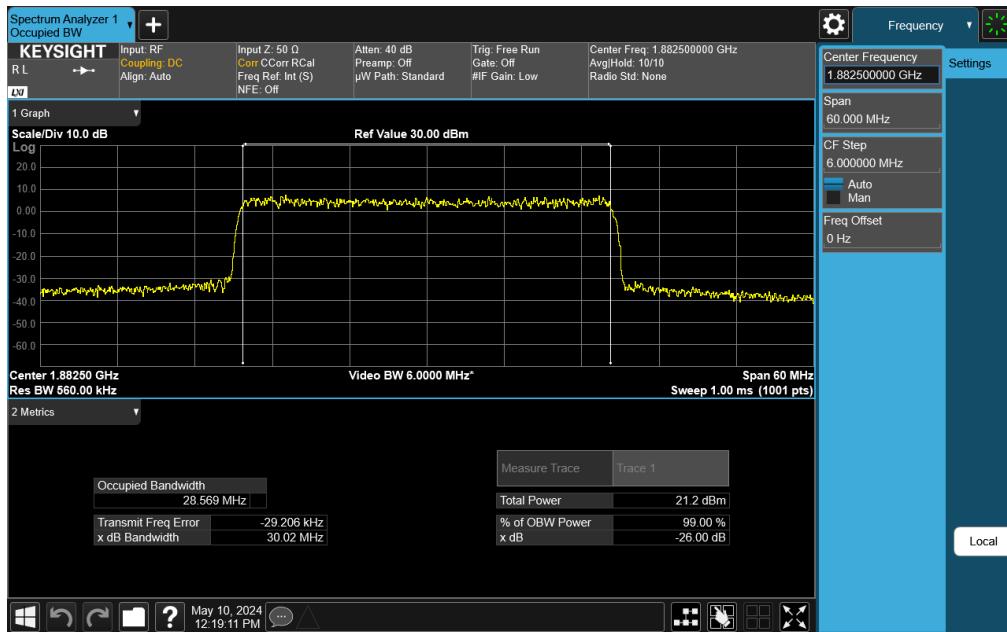


Plot 7-51. Occupied Bandwidth Plot (NR Band n25 - 30MHz CP-OFDM QPSK - Full RB)




Plot 7-52. Occupied Bandwidth Plot (NR Band n25 - 30MHz CP-OFDM 16QAM - Full RB)


FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device		Page 40 of 219

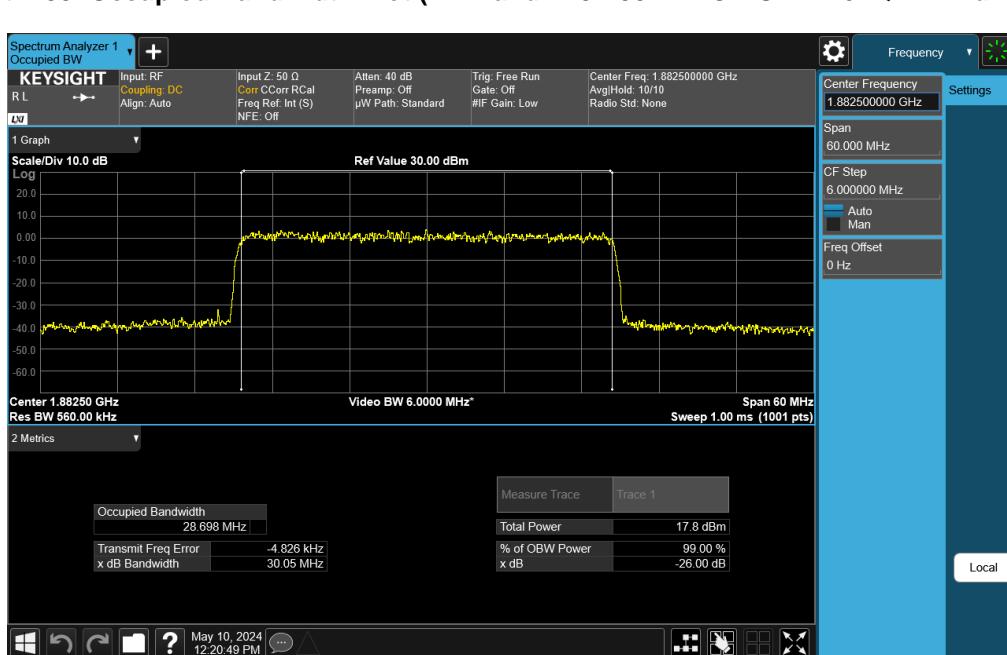

FCC ID: BCGA2995	 element PART 24 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device		Page 41 of 219

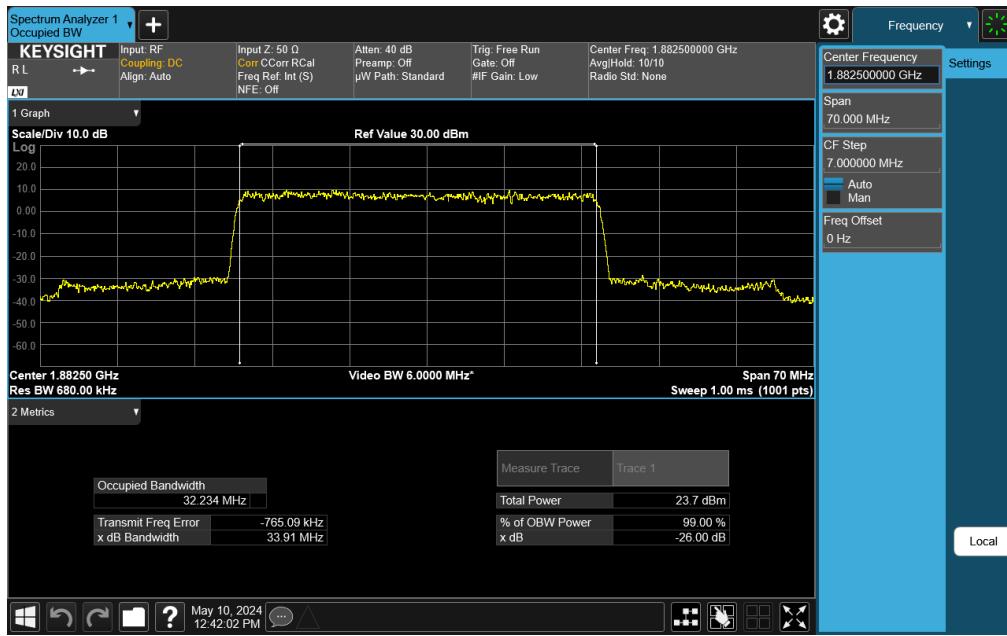

Plot 7-55. Occupied Bandwidth Plot (NR Band n25 - 35MHz DFT-s-OFDM π/2 BPSK - Full RB)

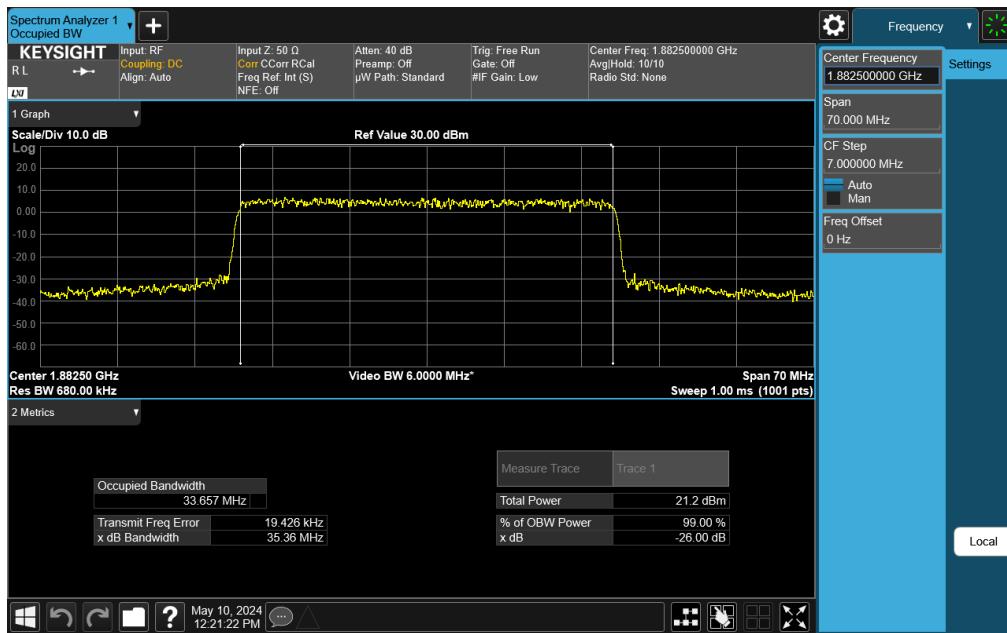


Plot 7-56. Occupied Bandwidth Plot (NR Band n25 - 35MHz CP-OFDM QPSK - Full RB)

FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device	Page 42 of 219




Plot 7-57. Occupied Bandwidth Plot (NR Band n25 - 35MHz CP-OFDM 16QAM - Full RB)

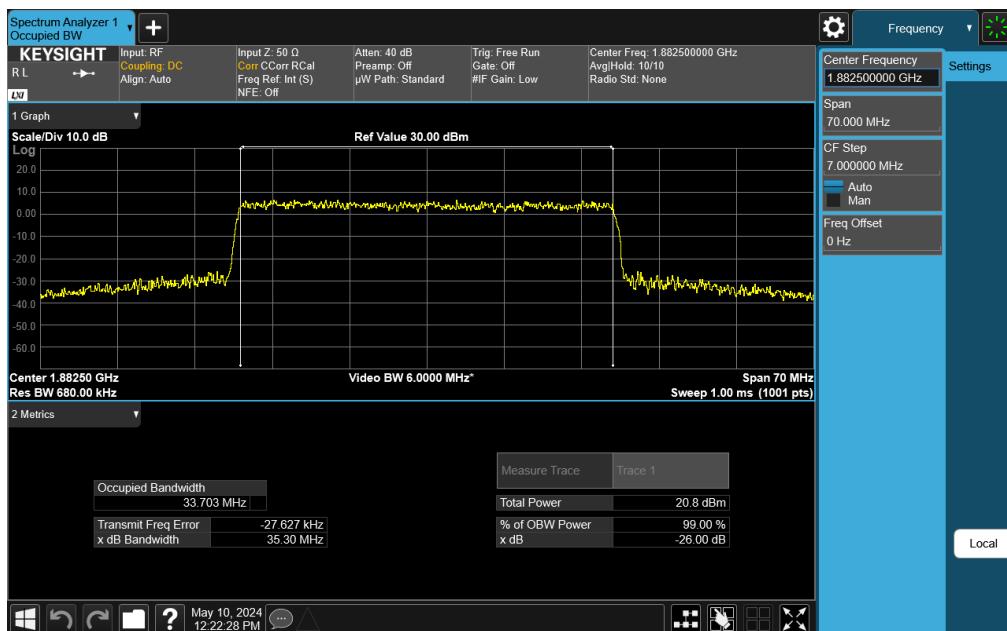


Plot 7-58. Occupied Bandwidth Plot (NR Band n25 - 35MHz CP-OFDM 64QAM - Full RB)

FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device		Page 43 of 219

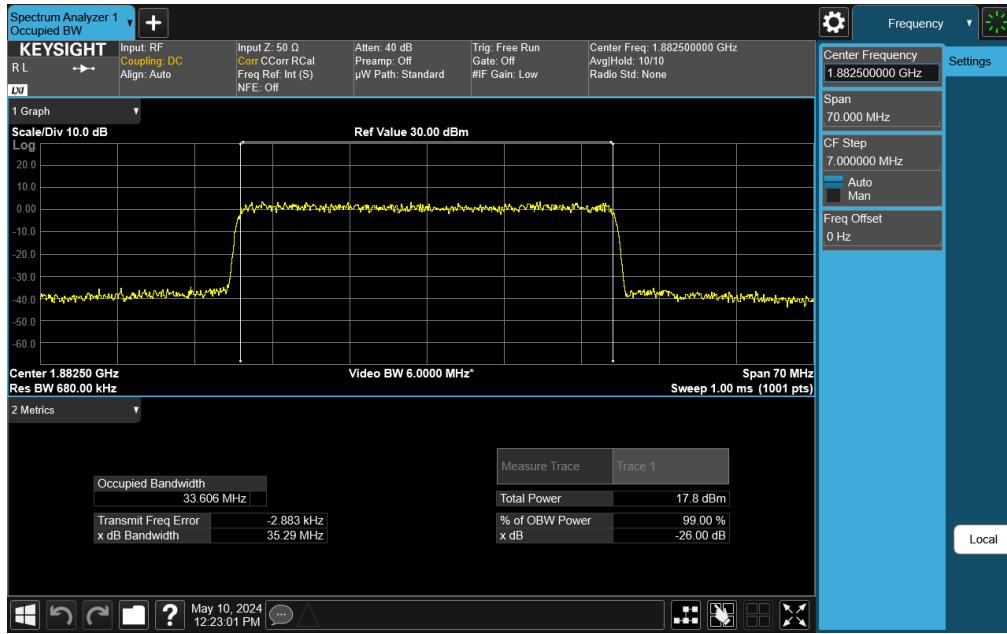


Plot 7-59. Occupied Bandwidth Plot (NR Band n25 - 35MHz CP-OFDM 256QAM - Full RB)

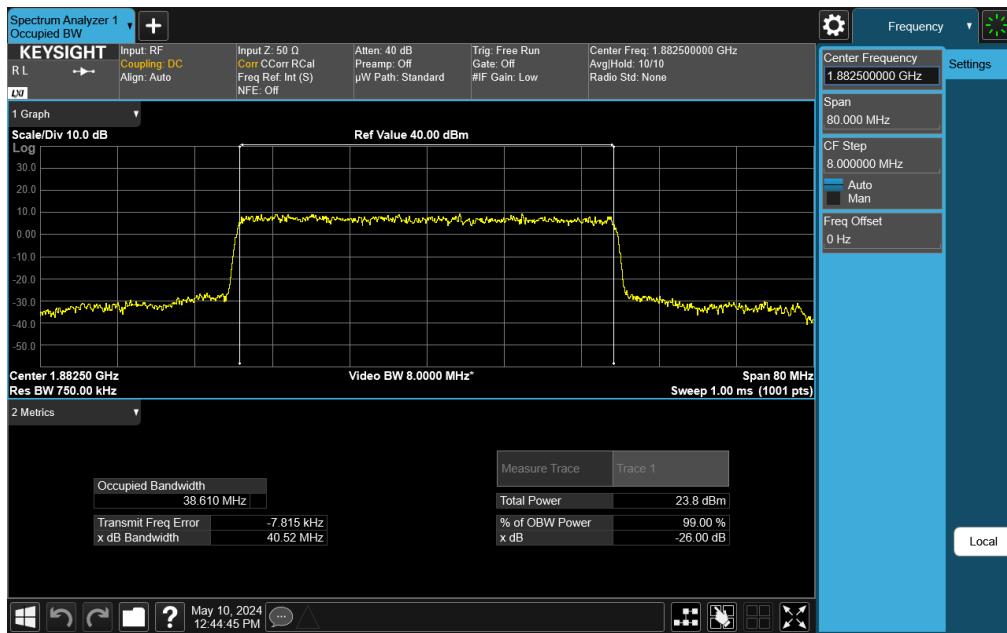

Plot 7-60. Occupied Bandwidth Plot (NR Band n25 - 40MHz DFT-s-OFDM π/2 BPSK - Full RB)

FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device		Page 44 of 219

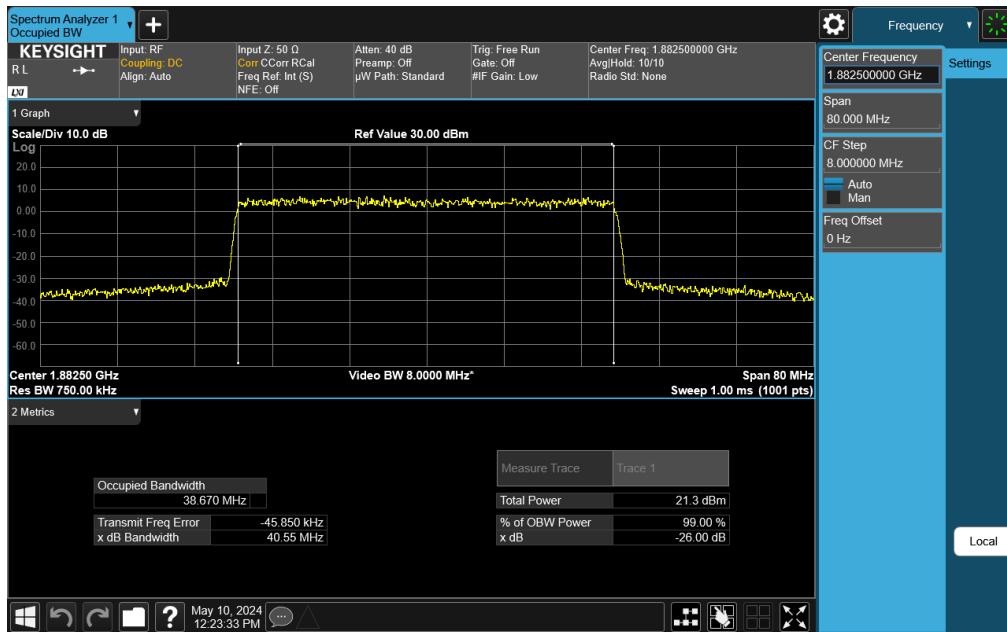


Plot 7-61. Occupied Bandwidth Plot (NR Band n25 - 40MHz CP-OFDM QPSK - Full RB)




Plot 7-62. Occupied Bandwidth Plot (NR Band n25 - 40MHz CP-OFDM 16QAM - Full RB)

FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device		Page 45 of 219

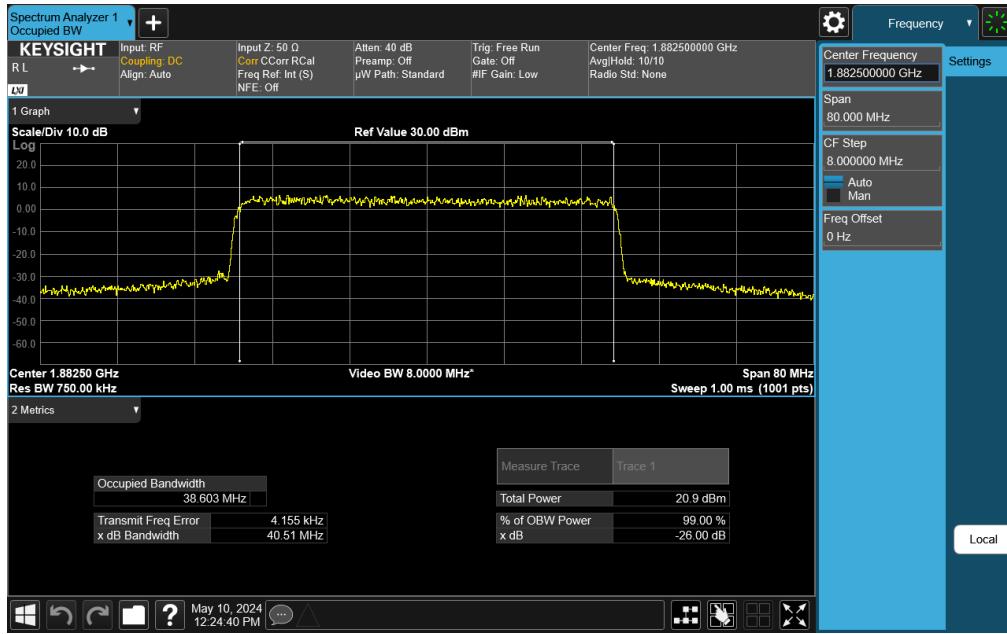


Plot 7-63. Occupied Bandwidth Plot (NR Band n25 - 40MHz CP-OFDM 64QAM - Full RB)

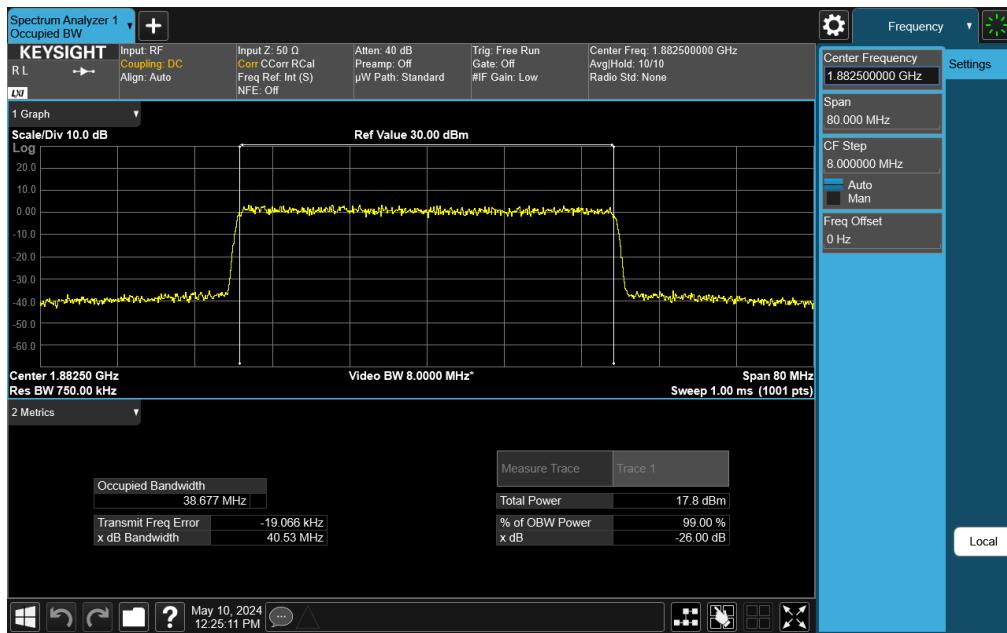

Plot 7-64. Occupied Bandwidth Plot (NR Band n25 - 40MHz CP-OFDM 256QAM - Full RB)

FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device		Page 46 of 219

WCDMA PCS

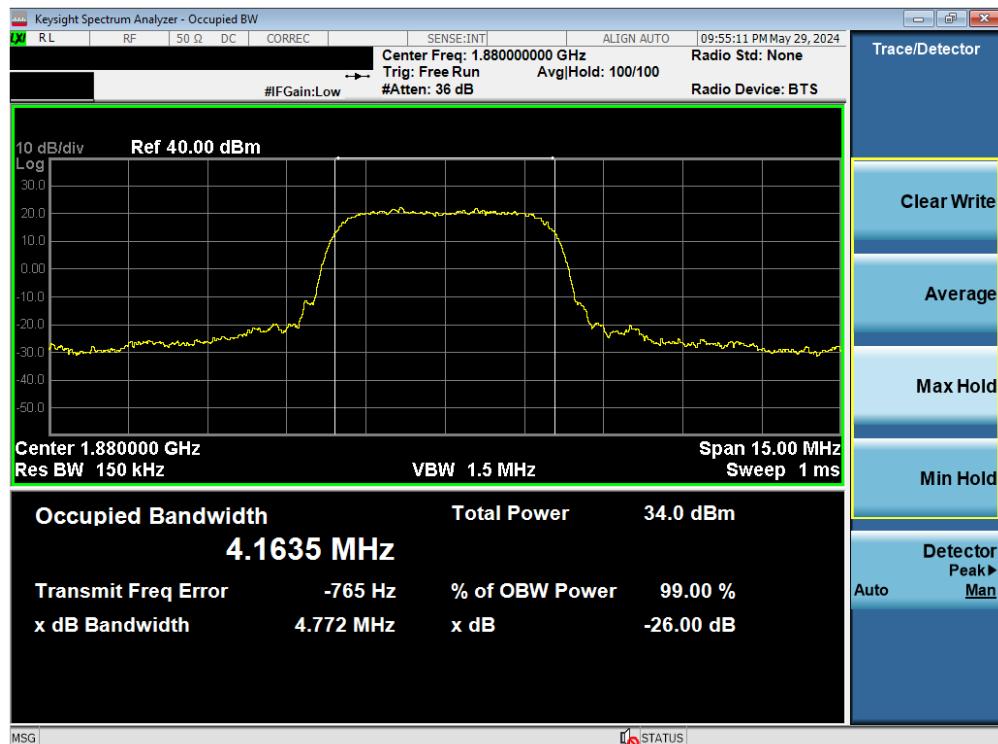

Plot 7-65. Occupied Bandwidth Plot (WCDMA, Ch. 9400)

FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device		Page 47 of 219

7.3 Spurious and Harmonic Emissions at Antenna Terminal

§2.1051, §24.238(a)

Test Overview and Limit

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section. All ports were tested and only the worst case data were reported.

The minimum permissible attenuation level of any spurious emission is $43 + 10 \log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 20GHz (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

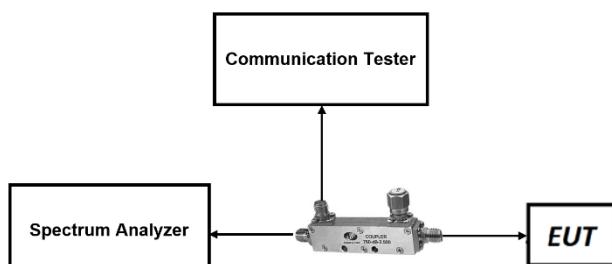


Figure 7-3. LTE Test Instrument & Measurement Setup




Figure 7-4. FR1 Test Instrument & Measurement Setup


FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device	Page 48 of 219

Test Notes


1. Per Part 24, compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth 100 kHz or greater for measurements below 1GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
2. For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.
3. NR band n25 overlaps the entire frequency range of NR band 2. Therefore, the conducted emissions data of NR band n25 provided in this report covers NR band n2.

FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device		Page 49 of 219

LTE Band 25/2

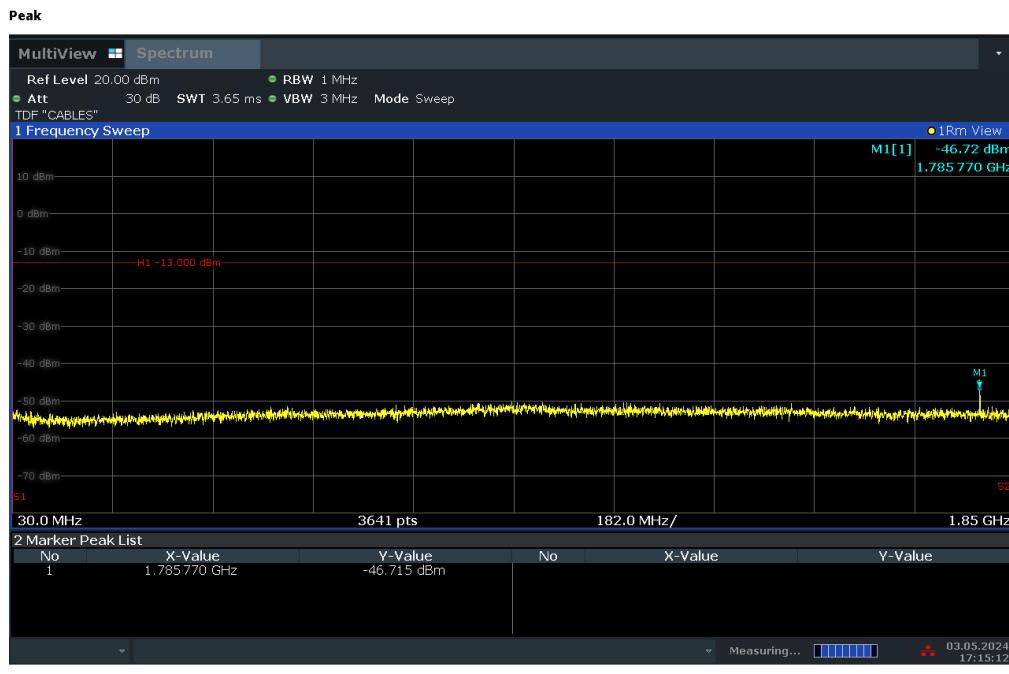


Plot 7-66: Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

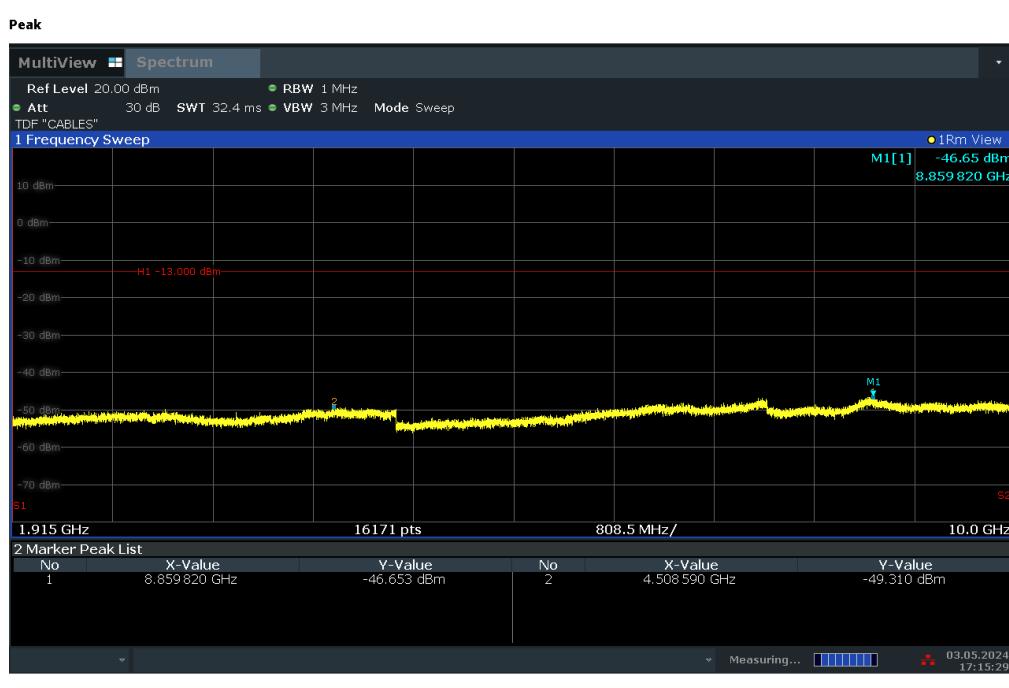


Plot 7-67. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

FCC ID: BCGA2995	 element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device		Page 50 of 219

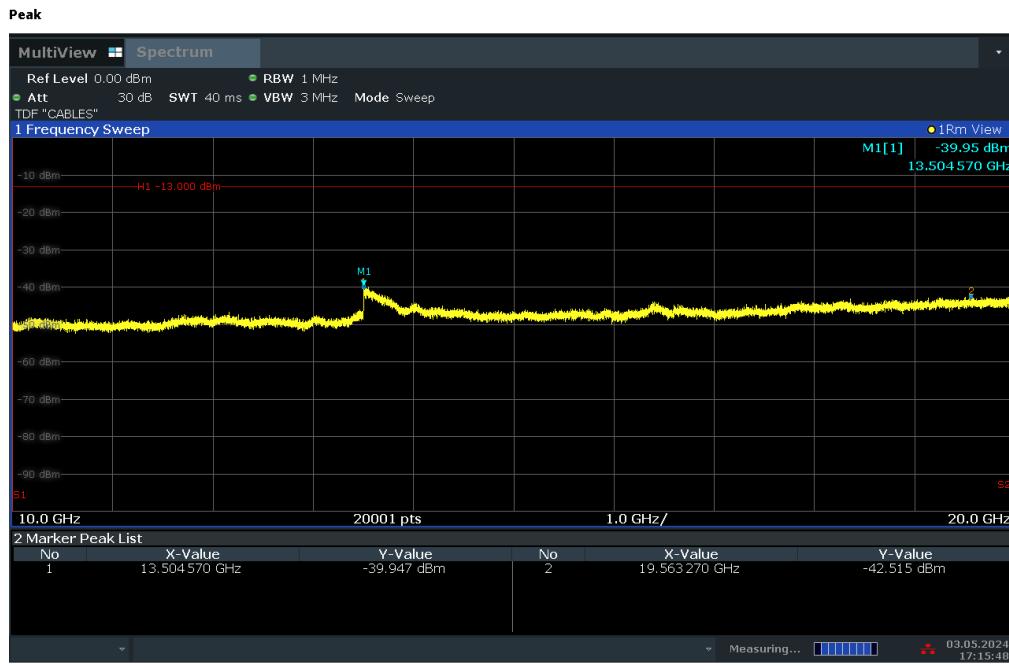


Plot 7-68. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

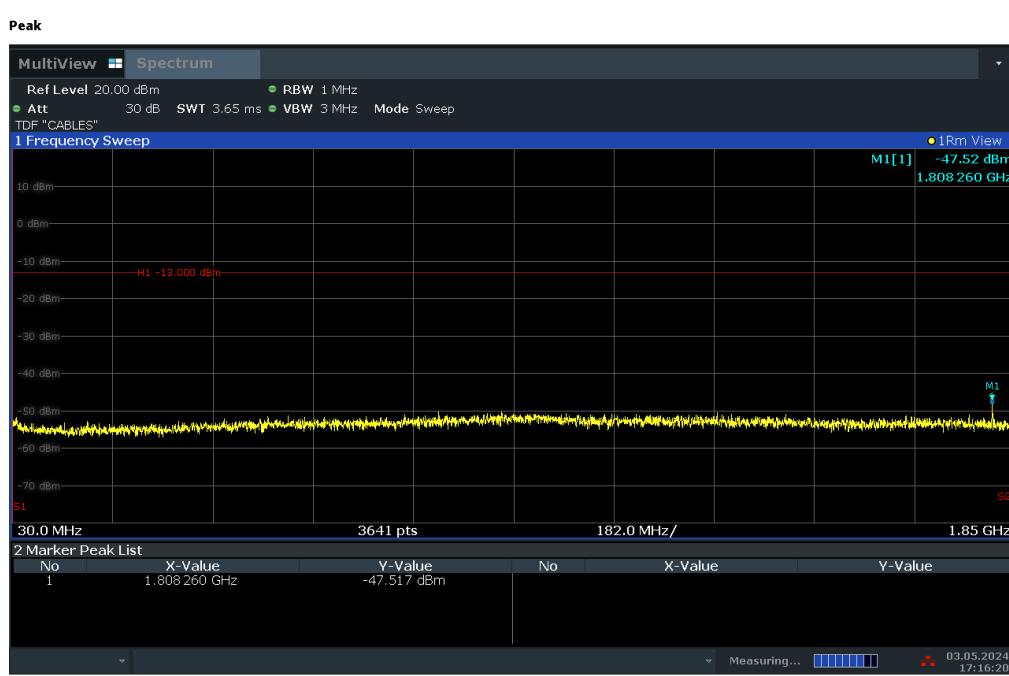


Plot 7-69. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: BCGA2995	element PART 24 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device		Page 51 of 219

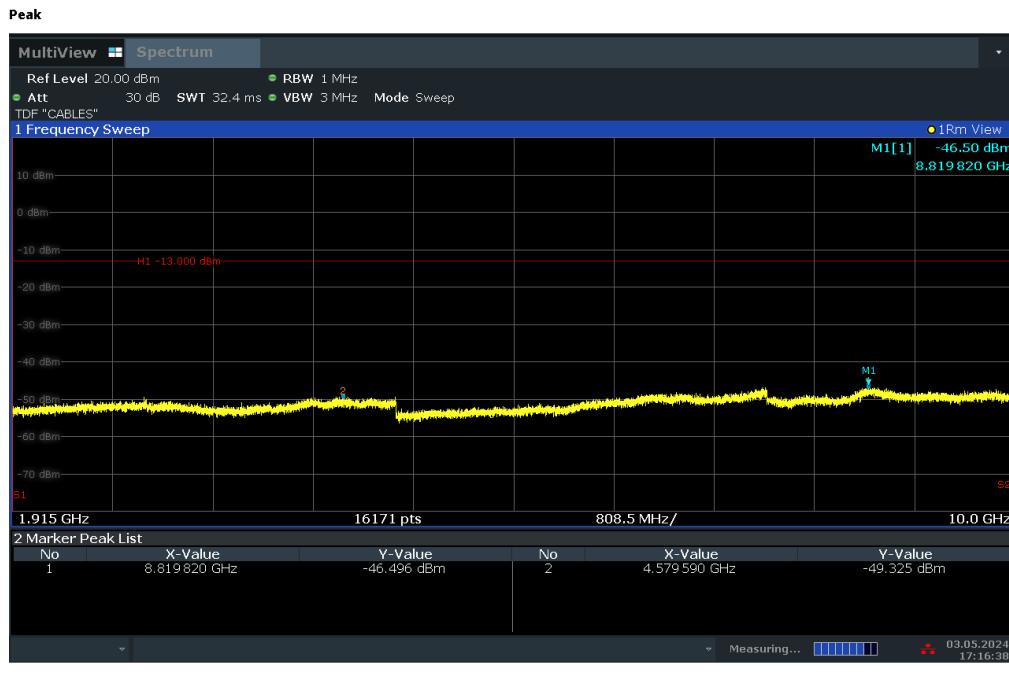


Plot 7-70. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

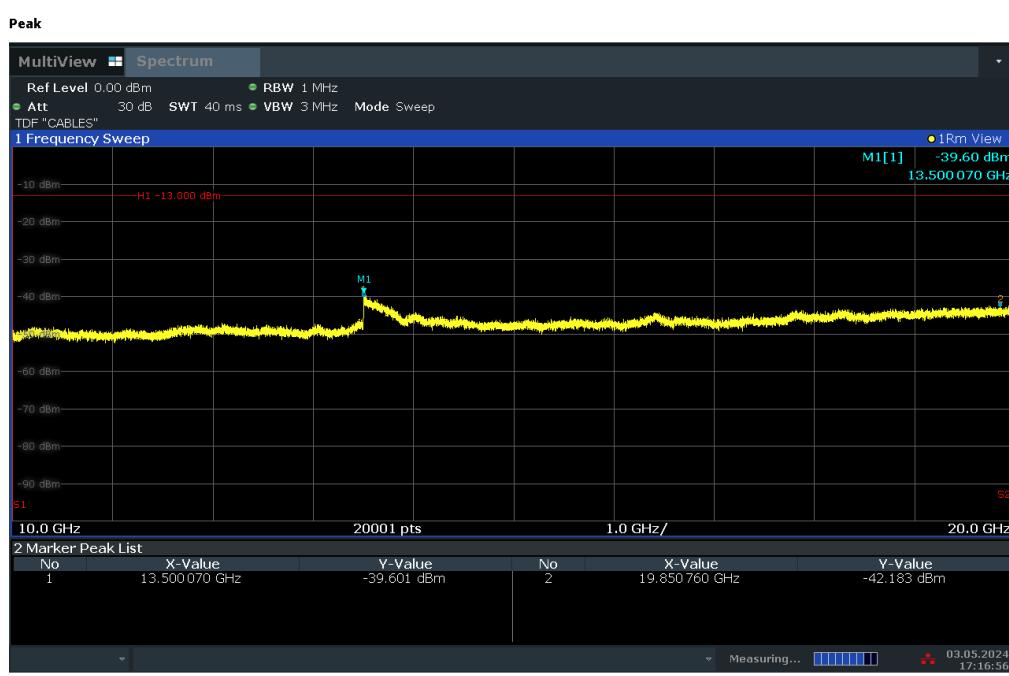


Plot 7-71. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device		Page 52 of 219

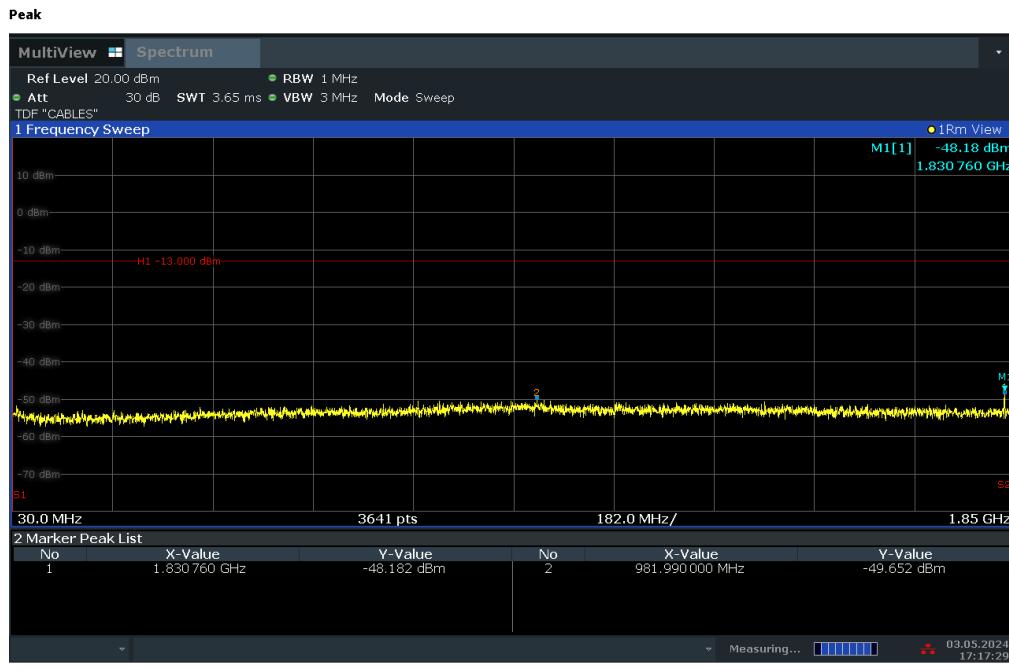


Plot 7-72. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

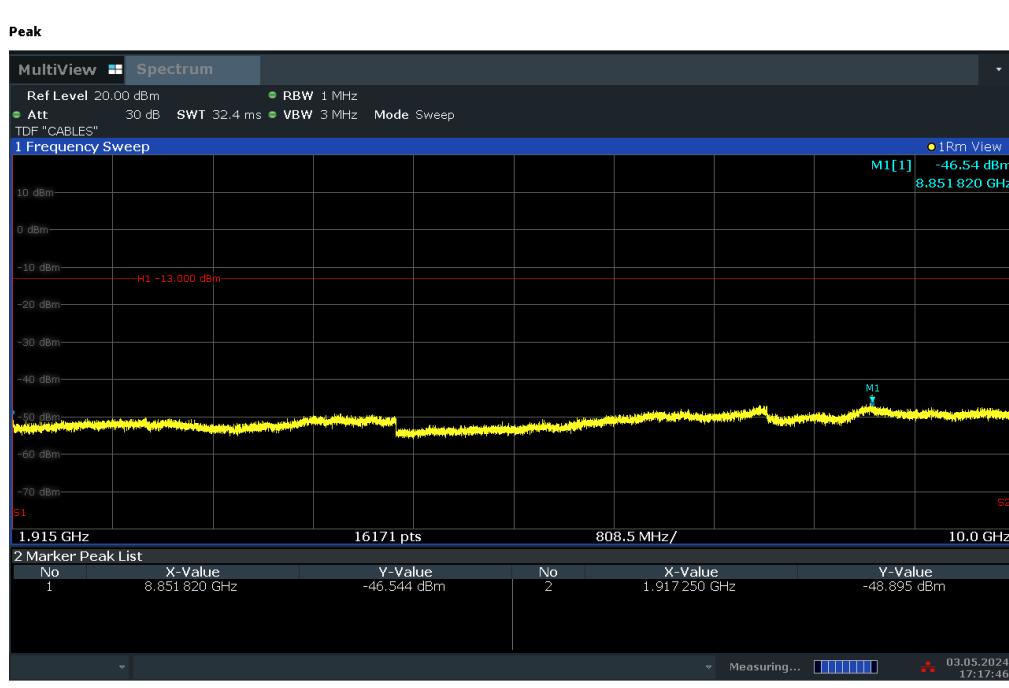

Plot 7-73. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)


FCC ID: BCGA2995	element PART 24 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device		Page 53 of 219

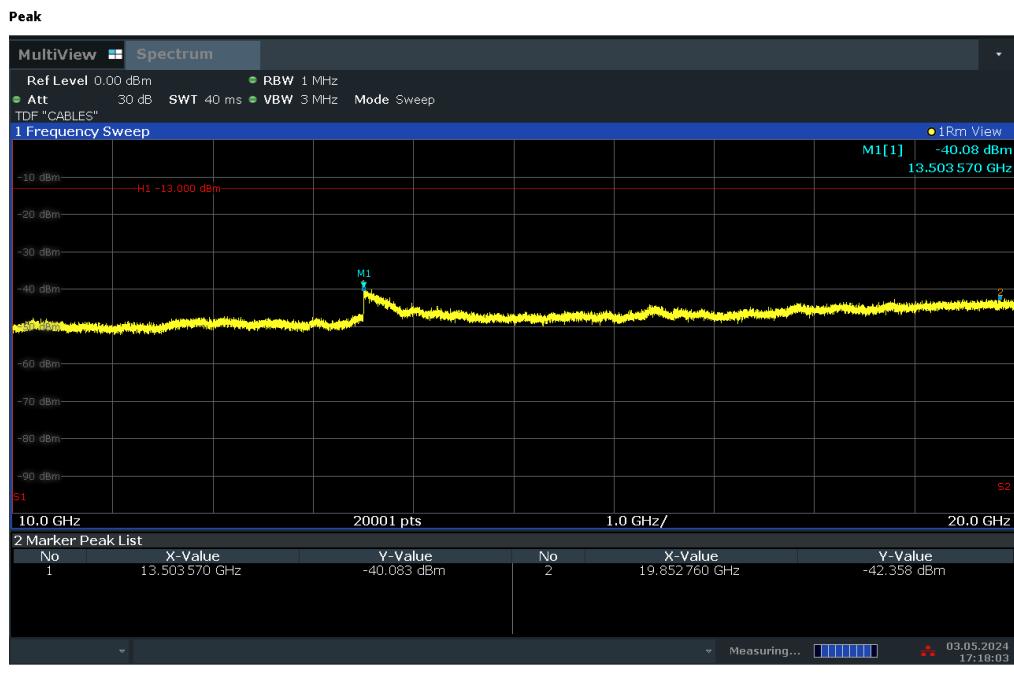


Plot 7-74. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device		Page 54 of 219

NR Band n25/n2

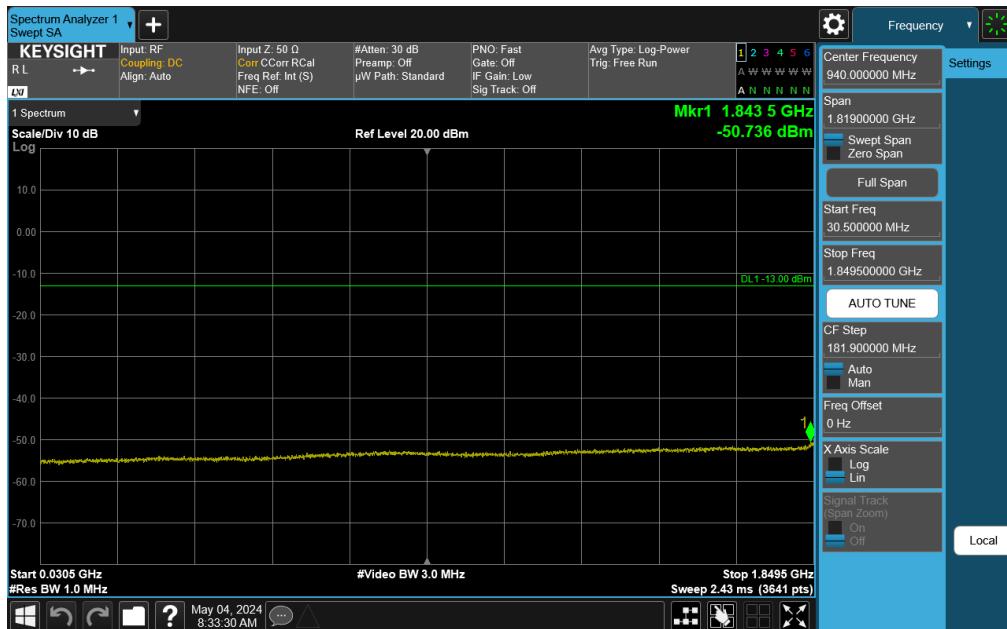


Plot 7-75. Conducted Spurious Plot (NR Band n25/n2 - 40.0MHz - RB Size 1, RB Offset 0 - Low Channel)

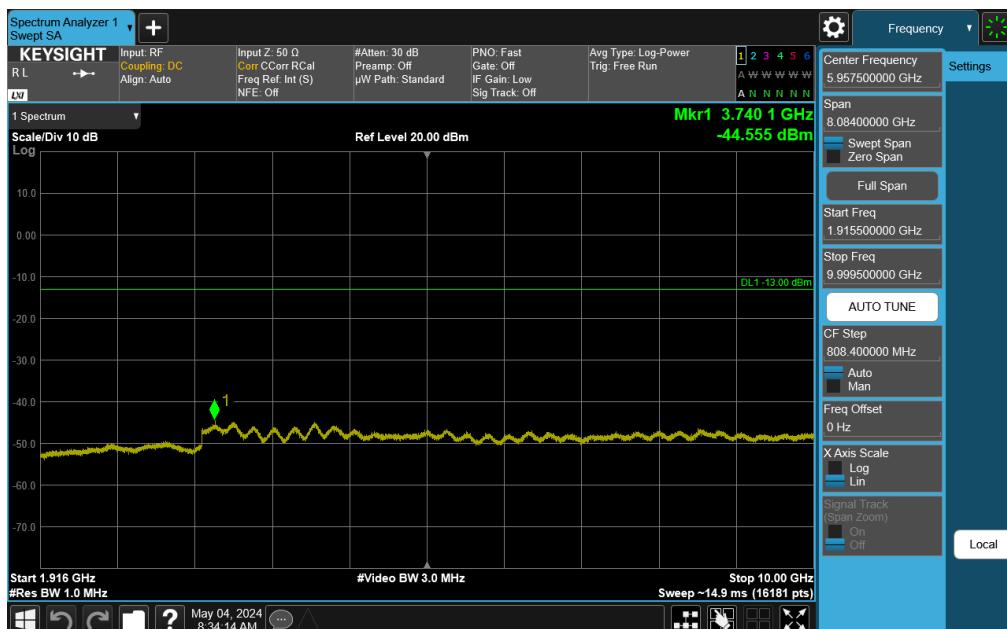


Plot 7-76. Conducted Spurious Plot (NR Band n25/n2 - 40.0MHz - RB Size 1, RB Offset 0 - Low Channel)

FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device		Page 55 of 219

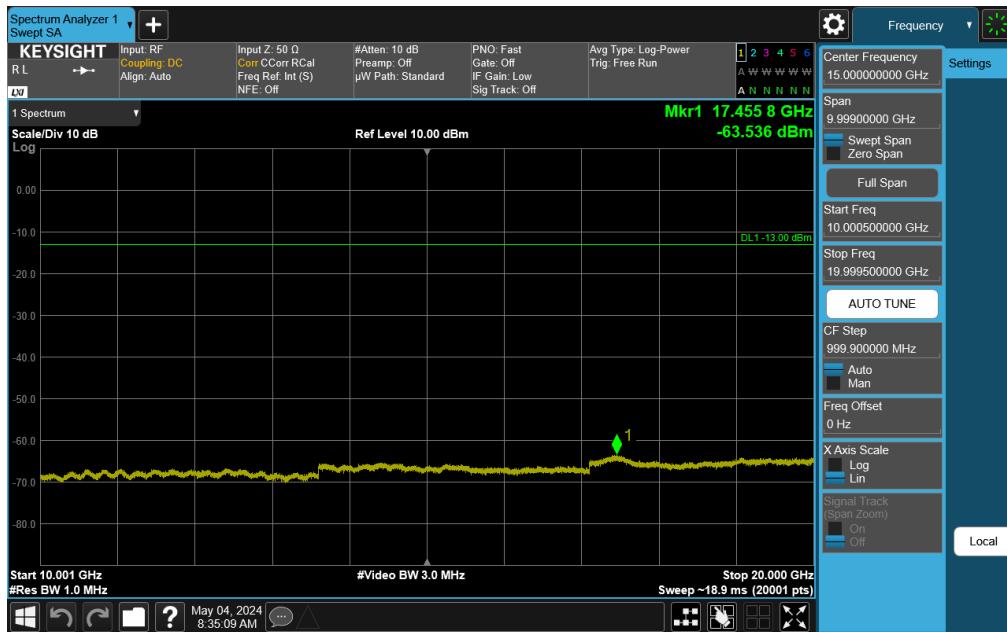


Plot 7-77. Conducted Spurious Plot (NR Band n25/n2 - 40.0MHz - RB Size 1, RB Offset 0 - Low Channel)

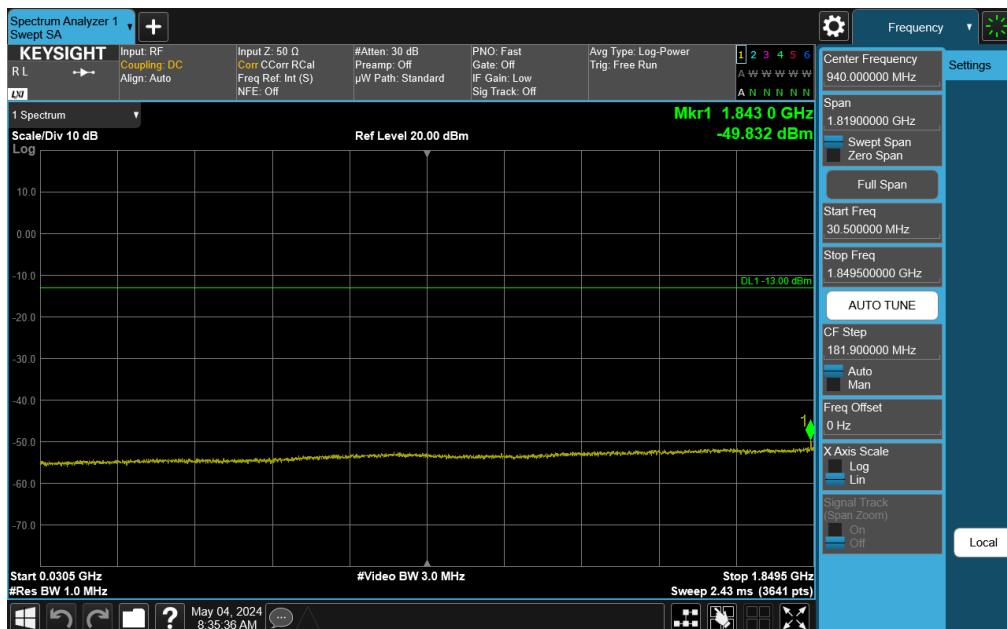


Plot 7-78. Conducted Spurious Plot (NR Band n25/n2 - 40.0MHz - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device	Page 56 of 219

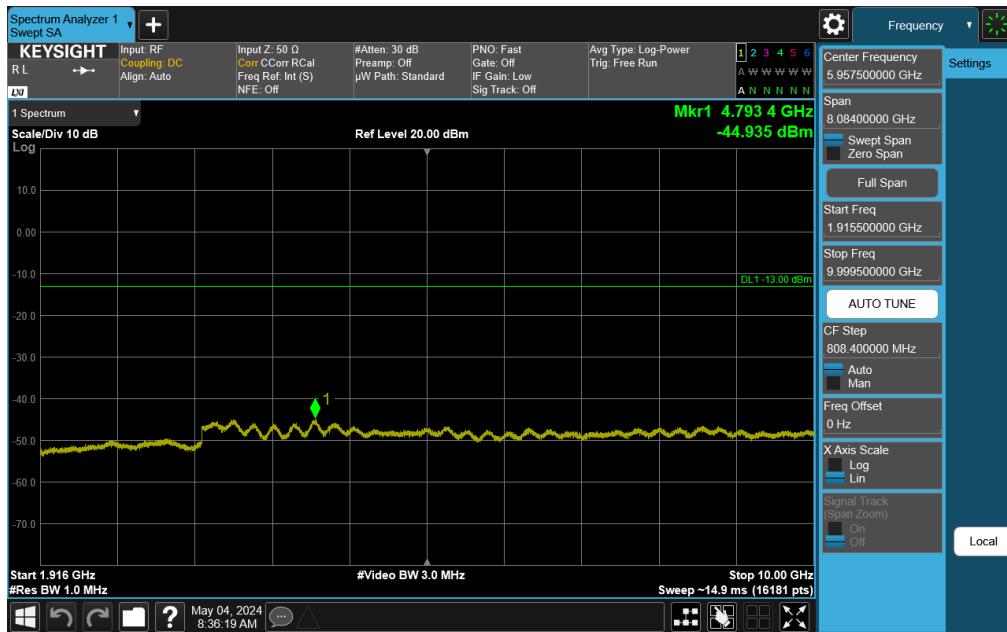


Plot 7-79. Conducted Spurious Plot (NR Band n25/n2 - 40.0MHz - RB Size 1, RB Offset 0 - Mid Channel)

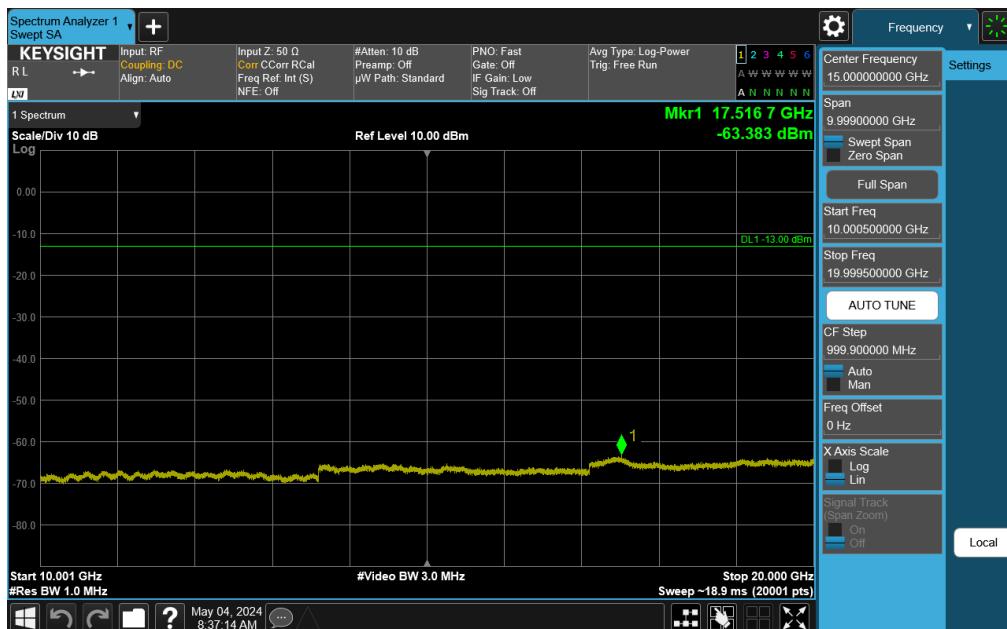


Plot 7-80. Conducted Spurious Plot (NR Band n25/n2 - 40.0MHz - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device	Page 57 of 219

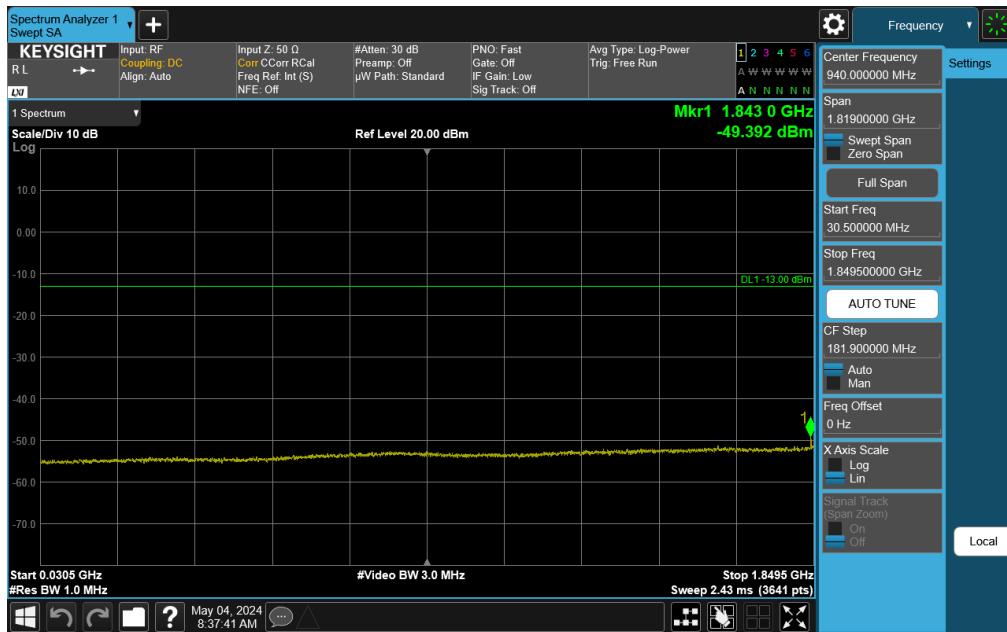


Plot 7-81. Conducted Spurious Plot (NR Band n25/n2 - 40.0MHz - RB Size 1, RB Offset 0 - High Channel)

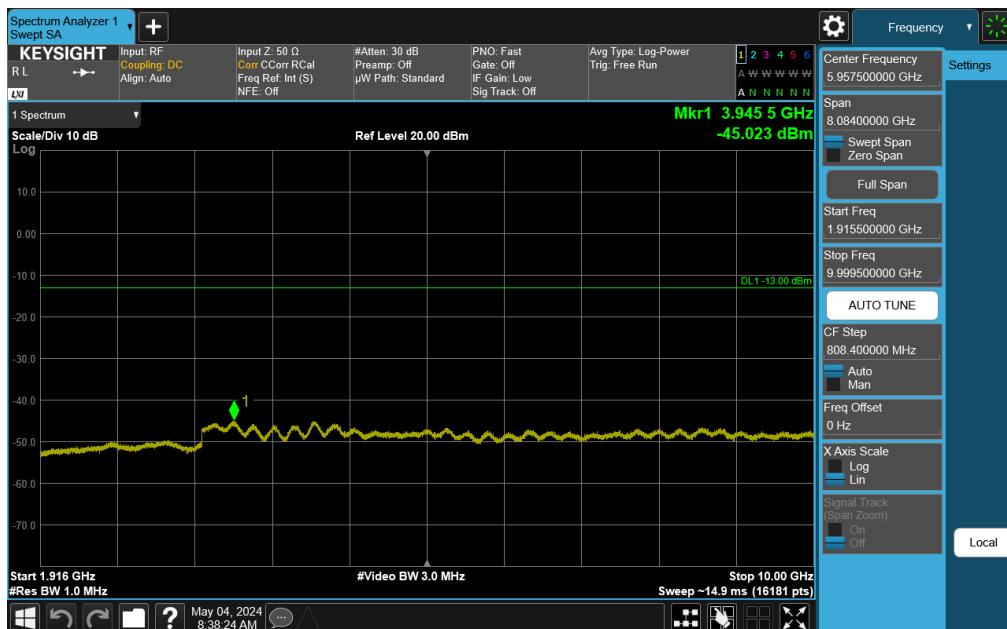


Plot 7-82. Conducted Spurious Plot (NR Band n25/n2 - 40.0MHz - RB Size 1, RB Offset 0 - High Channel)

FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device	Page 58 of 219

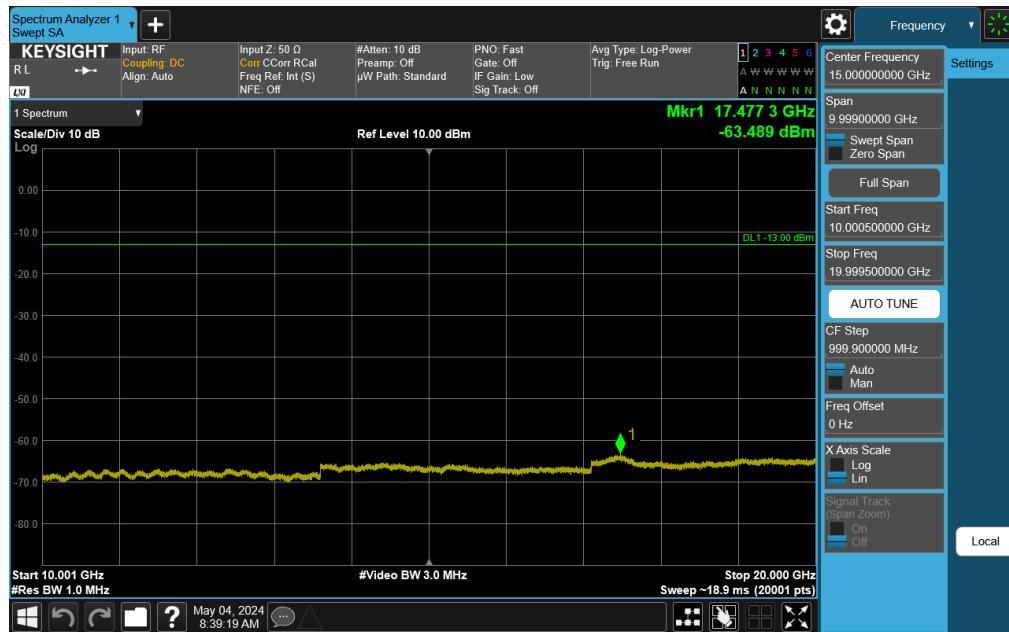


FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device		Page 59 of 219

WCDMA PCS

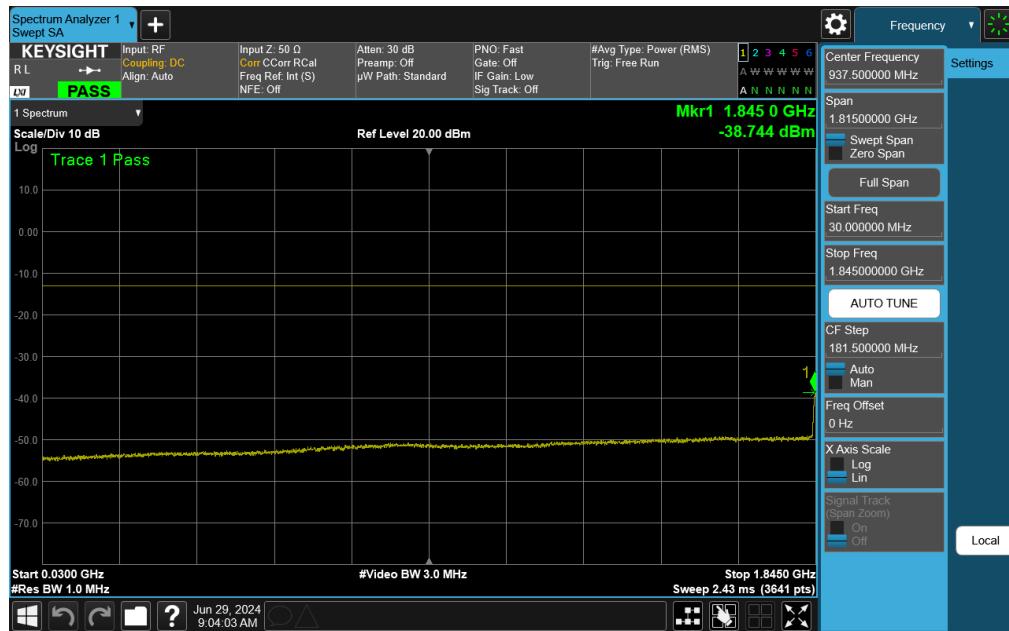


Plot 7-84. Conducted Spurious Plot (WCDMA Ch. 9262)

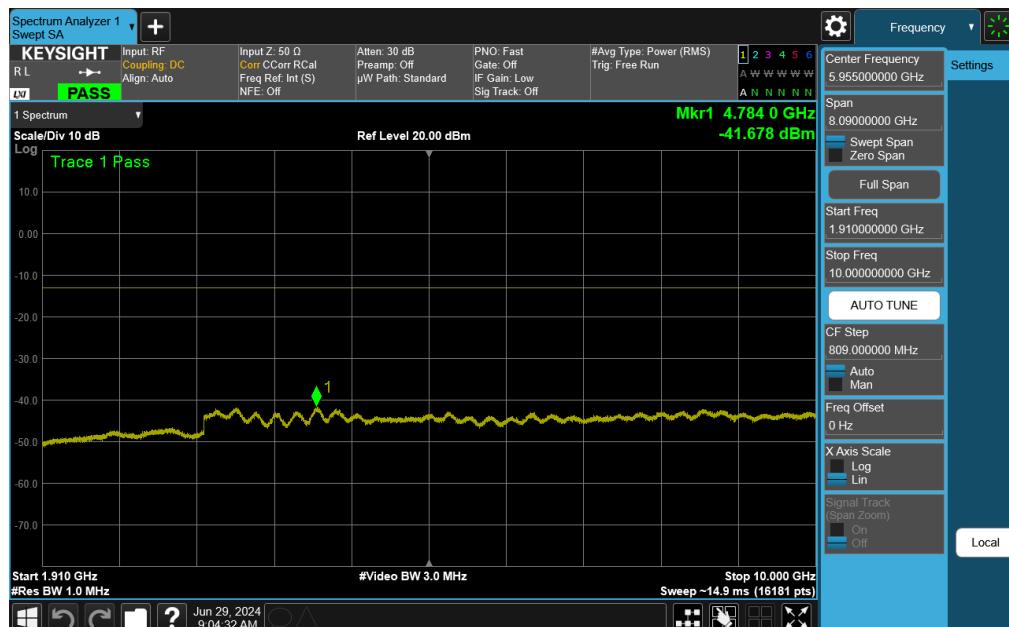


Plot 7-85. Conducted Spurious Plot (WCDMA Ch. 9262)

FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device	Page 60 of 219


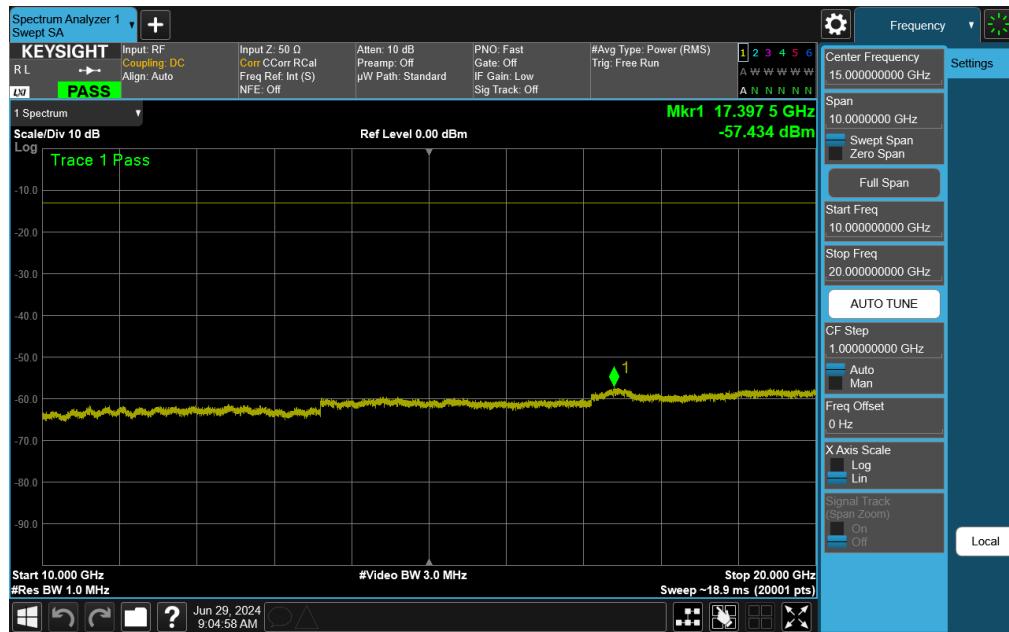


Plot 7-86. Conducted Spurious Plot (WCDMA Ch. 9262)


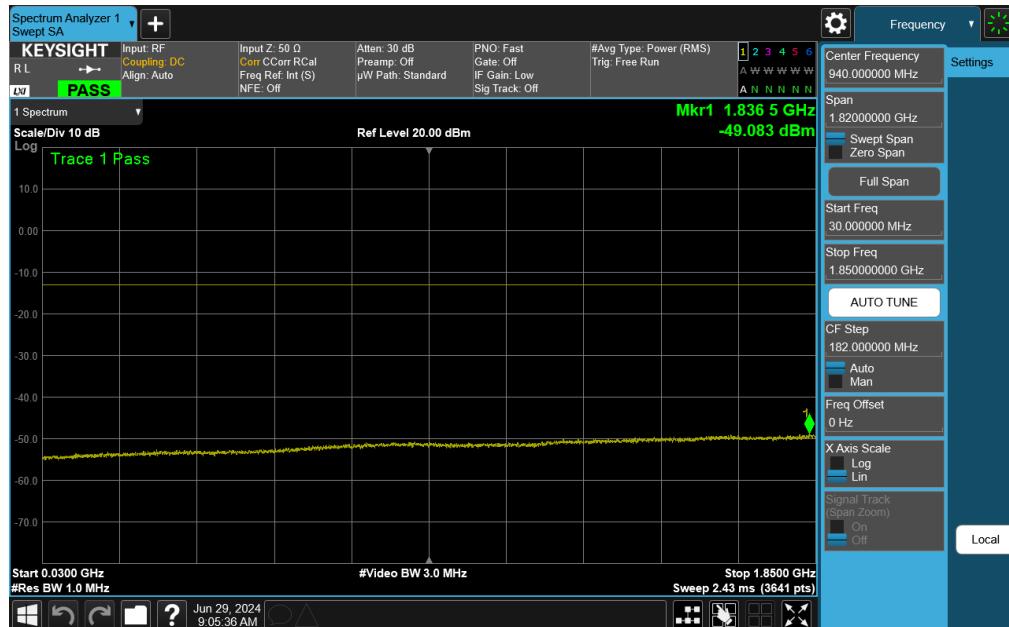


Plot 7-87. Conducted Spurious Plot (WCDMA Ch. 9400)


FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device		Page 61 of 219

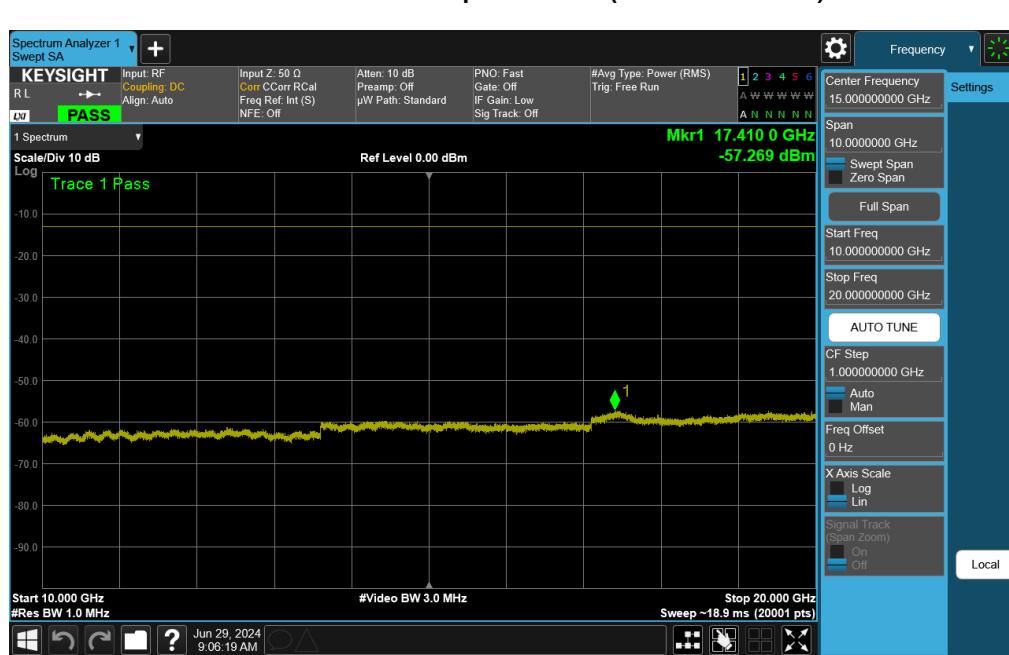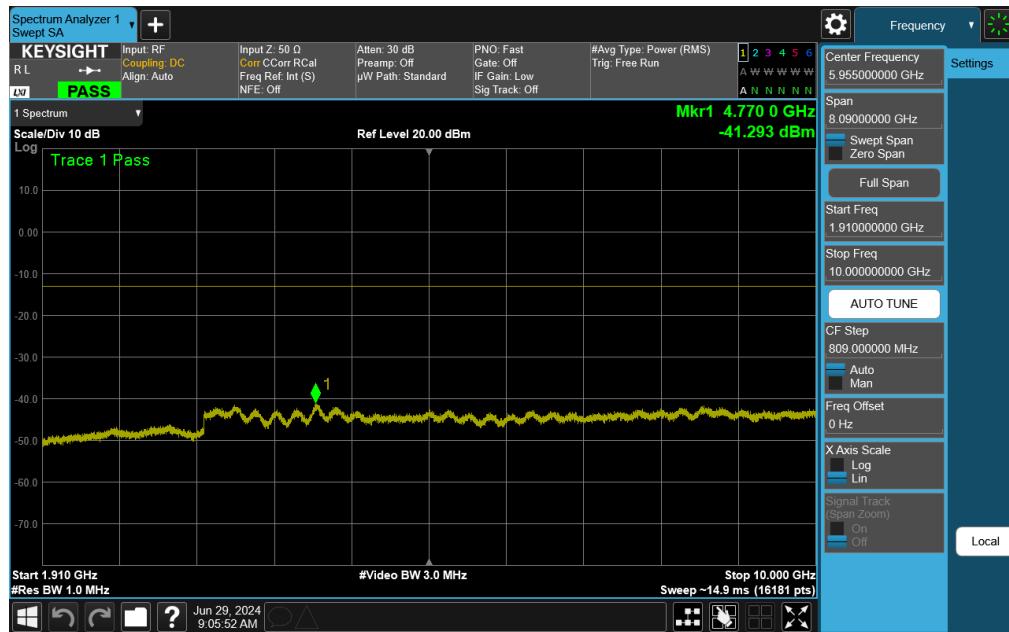

FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device	Page 62 of 219

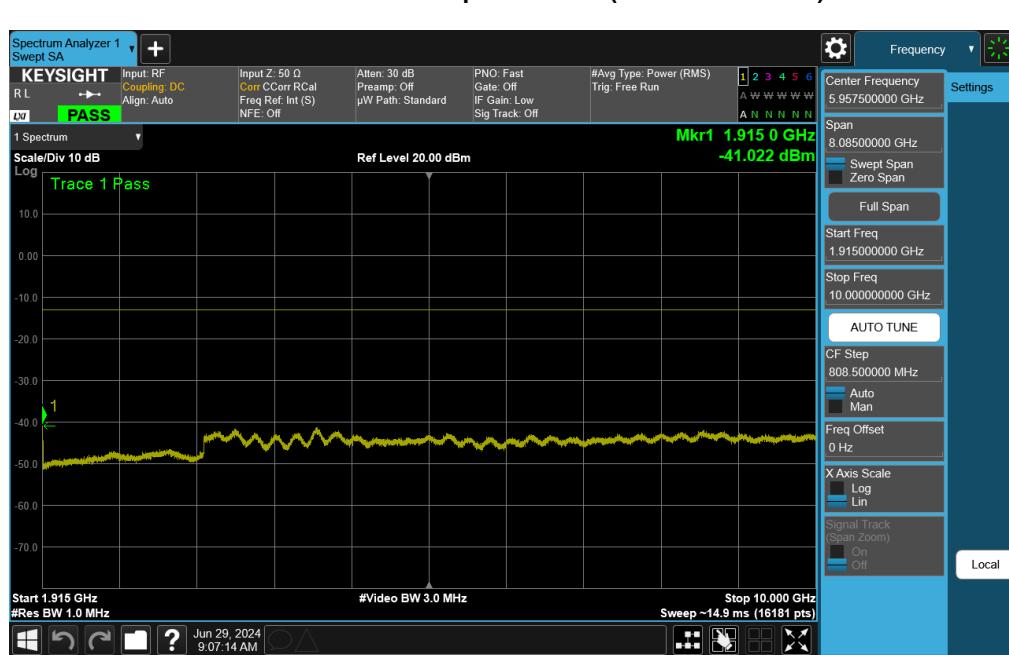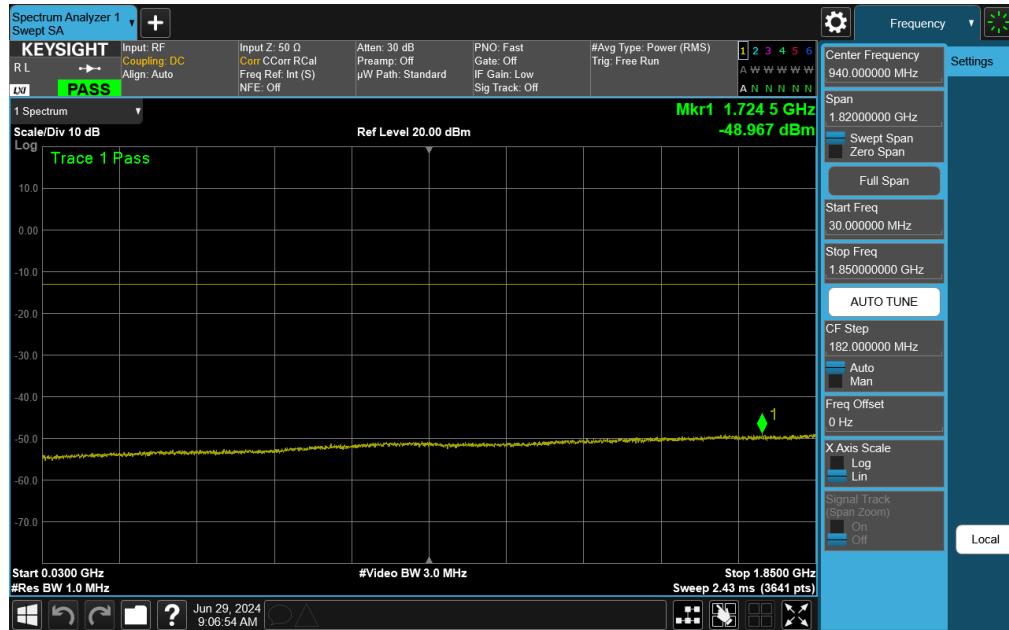

FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device	Page 63 of 219

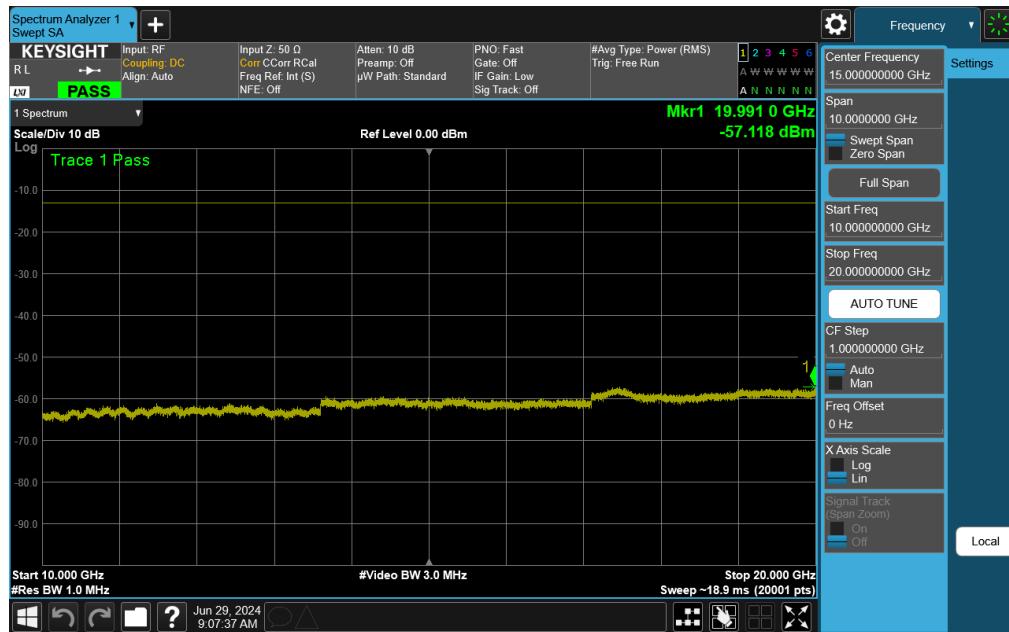

Plot 7-92. Conducted Spurious Plot (WCDMA Ch. 9538)

FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device	Page 64 of 219

7.4 Band Edge Emissions at Antenna Terminal

§2.1051, §24.238(a)

Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section. All ports were tested and only the worst case data was reported.

The minimum permissible attenuation level of any spurious emission is $43 + 10 \log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW \geq 1% of the emission bandwidth
4. VBW \geq 3 x RBW
5. Detector = RMS
6. Number of sweep points \geq 2 x Span/RBW
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

FCC ID: BCGA2995	 element		
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device	Approved by: Technical Manager

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

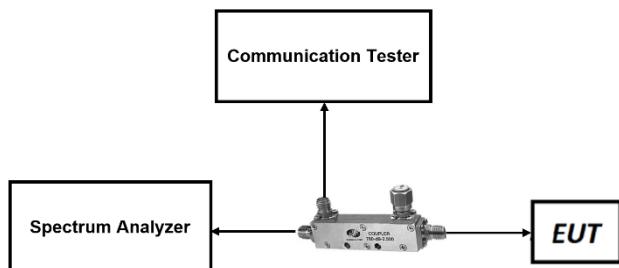


Figure 7-5. LTE Test Instrument & Measurement Setup




Figure 7-6. FR1 Test Instrument & Measurement Setup

Test Notes

1. Per 24.238(a), in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
2. For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

FCC ID: BCGA2995	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2405200018-08.BCG	Test Dates: 4/18/2024 - 6/24/2024	EUT Type: Tablet Device	Page 66 of 219