



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 RU52 LPI	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.29
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5955 (RU52.37)	-5.25	-4.64	-	-	-1.92	4.31	2.39	24.00	-21.61
6175 (RU52.37)	-5.21	-4.77	-	-	-1.97	4.69	2.72	24.00	-21.28
6415 (RU52.40)	-5.67	-4.94	-	-	-2.28	4.63	2.35	24.00	-21.65
6435 (RU52.37)	-5.58	-4.83	-	-	-2.18	4.66	2.48	24.00	-21.52
6475 (RU52.37)	-4.96	-5.15	-	-	-2.04	4.66	2.61	24.00	-21.39
6515 (RU52.40)	-5.01	-5.05	-	-	-2.02	4.66	2.64	24.00	-21.36
6535 (RU52.37)	-5.87	-5.60	-	-	-2.72	5.29	2.57	24.00	-21.43
6695 (RU52.37)	-6.04	-5.62	-	-	-2.82	5.29	2.47	24.00	-21.53
6855 (RU52.40)	-5.78	-5.87	-	-	-2.81	5.29	2.48	24.00	-21.52
6875 (RU52.38)	-5.56	-5.74	-	-	-2.64	5.29	2.65	24.00	-21.35
6875 (RU52.39)	-5.58	-5.74	-	-	-2.65	5.29	2.64	24.00	-21.36
6895 (RU52.37)	-3.18	-3.22	-	-	-0.19	2.92	2.73	24.00	-21.27
6995 (RU52.37)	-3.38	-3.10	-	-	-0.23	2.92	2.69	24.00	-21.31
7095 (RU52.40)	-3.04	-3.03	-	-	-0.02	2.92	2.90	24.00	-21.10

Table 368 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 RU106 LPI	Duty Cycle (%):	97.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.29
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5955 (RU106.53)	-2.58	-1.62	-	-	0.93	4.31	5.25	24.00	-18.75
6175 (RU106.53)	-2.42	-1.89	-	-	0.86	4.69	5.55	24.00	-18.45
6415 (RU106.54)	-2.38	-1.78	-	-	0.94	4.63	5.57	24.00	-18.43
6435 (RU106.53)	-2.54	-1.91	-	-	0.80	4.66	5.45	24.00	-18.55
6475 (RU106.53)	-1.87	-2.27	-	-	0.94	4.66	5.60	24.00	-18.40
6515 (RU106.54)	-1.90	-2.08	-	-	1.02	4.66	5.68	24.00	-18.32
6535 (RU106.53)	-2.53	-2.59	-	-	0.45	5.29	5.74	24.00	-18.26
6695 (RU106.53)	-2.81	-2.88	-	-	0.17	5.29	5.46	24.00	-18.54
6855 (RU106.54)	-2.57	-2.94	-	-	0.26	5.29	5.55	24.00	-18.45
6875 (RU106.53)	-2.87	-2.64	-	-	3.27	5.29	8.56	24.00	-15.44
6895 (RU106.53)	-0.15	-0.43	-	-	2.73	2.92	5.65	24.00	-18.35
6995 (RU106.53)	-0.33	-0.33	-	-	2.68	2.92	5.60	24.00	-18.40
7095 (RU106.54)	-0.40	-0.22	-	-	2.70	2.92	5.62	24.00	-18.38

Table 369 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	96.5
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.69
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5955	18.60	18.69	-	-	21.65	4.31	25.97	30.00	-4.03
6175	18.56	18.65	-	-	21.61	4.69	26.31	30.00	-3.69
6415	18.57	18.65	-	-	21.62	4.63	26.25	30.00	-3.75

Table 370 - Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.69
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5965	19.96	20.00	-	-	22.99	4.31	27.31	30.00	-2.69
6165	20.90	20.93	-	-	23.93	4.69	28.62	30.00	-1.38
6405	21.11	21.21	-	-	24.17	4.63	28.80	30.00	-1.20

Table 371 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	97.6
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.69
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5985	19.85	19.69	-	-	22.78	4.31	27.09	30.00	-2.91
6145	21.12	20.94	-	-	24.04	4.69	28.73	30.00	-1.27
6385	21.13	20.87	-	-	24.01	4.63	28.64	30.00	-1.36

Table 372 - Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE160 SU SP	Duty Cycle (%):	95.6
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.69
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6025	19.03	19.18	-	-	22.12	4.31	26.43	30.00	-3.57
6185	19.37	19.34	-	-	22.37	4.69	27.06	30.00	-2.94
6345	19.36	19.17	-	-	22.27	4.63	26.91	30.00	-3.09

Table 373 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	RSS-248 4.5.5	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	95.5
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.66
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6435	18.42	18.58	-	-	21.51	4.66	26.17	30.00	-3.83
6475	18.56	18.34	-	-	21.46	4.66	26.12	30.00	-3.88
6515	18.66	18.74	-	-	21.71	4.66	26.36	30.00	-3.64

Table 374 - ISSED Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	RSS-248 4.5.5	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	95.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.66
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6445	21.04	21.04	-	-	24.05	4.66	28.71	30.00	-1.29
6485	20.98	20.88	-	-	23.94	4.66	28.60	30.00	-1.40
6525	21.04	20.90	-	-	23.98	4.66	28.64	30.00	-1.36

Table 375 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	RSS-248 4.5.5	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	96.5
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.66
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6465	21.12	20.92	-	-	24.03	4.66	28.68	30.00	-1.32
6545	21.25	21.12	-	-	24.19	5.29	29.49	30.00	-0.51

Table 376 - ISED Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	RSS-248 4.5.5	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE160 SU SP	Duty Cycle (%):	95.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.66
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6505	18.86	18.75	-	-	21.81	4.66	26.47	30.00	-3.53

Table 377 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	94.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.29
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6535	17.98	17.79	-	-	20.90	5.29	26.19	30.00	-3.81
6695	17.89	17.56	-	-	20.74	5.29	26.03	30.00	-3.97
6855	17.75	17.43	-	-	20.61	5.29	25.90	30.00	-4.10

Table 378 - Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	94.6
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.29
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6565	20.38	20.21	-	-	23.31	5.29	28.60	30.00	-1.40
6685	20.35	20.29	-	-	23.33	5.29	28.62	30.00	-1.38
6845	20.25	19.98	-	-	23.13	5.29	28.42	30.00	-1.58

Table 379 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	94.5
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.29
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6625	20.38	20.12	-	-	23.26	5.29	28.56	30.00	-1.44
6705	20.16	19.92	-	-	23.05	5.29	28.34	30.00	-1.66
6785	20.29	20.29	-	-	23.30	5.29	28.59	30.00	-1.41

Table 380 - Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE160 SU SP	Duty Cycle (%):	91.8
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.29
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6665	18.86	18.87	-	-	21.87	5.29	27.17	30.00	-2.83

Table 381 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 RU26 SP	Duty Cycle (%):	98.5
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.69
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5955 (RU26.0)	9.39	9.72	-	-	12.57	4.31	16.88	30.00	-13.12
6175 (RU26.0)	9.21	9.65	-	-	12.45	4.69	17.14	30.00	-12.86
6415 (RU26.8)	9.23	9.62	-	-	12.44	4.63	17.07	30.00	-12.93

Table 382 - Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 RU52 SP	Duty Cycle (%):	98.5
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.69
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5955 (RU52.37)	12.21	12.76	-	-	15.51	4.31	19.82	30.00	-10.18
6175 (RU52.37)	12.61	12.52	-	-	15.57	4.69	20.27	30.00	-9.73
6415 (RU52.40)	12.38	12.48	-	-	15.44	4.63	20.07	30.00	-9.93

Table 383 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 RU106 SP	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.69
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5955 (RU106.53)	15.79	15.96	-	-	18.89	4.31	23.20	30.00	-6.80
6175 (RU106.53)	15.50	15.49	-	-	18.51	4.69	23.20	30.00	-6.80
6415 (RU106.54)	15.21	15.45	-	-	18.34	4.63	22.98	30.00	-7.02

Table 384 - Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	RSS-248 4.5.5	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 RU26 SP	Duty Cycle (%):	98.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.66
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6435 (RU26.0)	9.12	9.71	-	-	12.44	4.66	17.09	30.00	-12.91
6475 (RU26.0)	9.29	9.40	-	-	12.35	4.66	17.01	30.00	-12.99
6515 (RU26.8)	9.39	9.52	-	-	12.47	4.66	17.12	30.00	-12.88

Table 385 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	RSS-248 4.5.5	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 RU52 SP	Duty Cycle (%):	97.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.66
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6435 (RU52.37)	12.36	12.71	-	-	15.55	4.66	20.20	30.00	-9.80
6475 (RU52.37)	12.47	12.35	-	-	15.42	4.66	20.08	30.00	-9.92
6515 (RU52.40)	12.46	12.55	-	-	15.51	4.66	20.17	30.00	-9.83

Table 386 - ISSED Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	RSS-248 4.5.5	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 RU106 SP	Duty Cycle (%):	98.6
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.66
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6435 (RU106.53)	15.32	15.41	-	-	18.37	4.66	23.03	30.00	-6.97
6475 (RU106.53)	15.32	15.43	-	-	18.38	4.66	23.04	30.00	-6.96
6515 (RU106.54)	15.49	15.45	-	-	18.48	4.66	23.14	30.00	-6.86

Table 387 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 RU26 SP	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.29
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6535 (RU26.0)	8.65	8.50	-	-	11.59	5.29	16.88	30.00	-13.12
6695 (RU26.0)	8.65	8.72	-	-	11.69	5.29	16.99	30.00	-13.01
6855 (RU26.8)	8.93	8.87	-	-	11.91	5.29	17.20	30.00	-12.80

Table 388 - Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 RU52 SP	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.29
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6535 (RU52.37)	11.59	11.72	-	-	14.67	5.29	19.96	30.00	-10.04
6695 (RU52.37)	11.98	11.85	-	-	14.93	5.29	20.22	30.00	-9.78
6855 (RU52.40)	11.70	11.88	-	-	14.80	5.29	20.09	30.00	-9.91

Table 389 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 RU106 SP	Duty Cycle (%):	98.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.29
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6535 (RU106.53)	14.71	14.55	-	-	17.64	5.29	22.93	30.00	-7.07
6695 (RU106.53)	14.98	14.90	-	-	17.95	5.29	23.24	30.00	-6.76
6855 (RU106.54)	14.88	14.54	-	-	17.73	5.29	23.02	30.00	-6.98

Table 390 - Maximum Conducted (average) Output Power Results



TxBF

Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(8) RSS-248	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	93.6
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	7.66
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5985	4.02	3.90	-	-	6.97	7.27	14.24	24.00	-9.76
6145	3.52	3.71	-	-	6.63	7.66	14.29	24.00	-9.71
6385	3.60	3.63	-	-	6.63	7.46	14.09	24.00	-9.91

Table 391 - Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407(a)(8) RSS-248	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	94.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	7.52
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6465	3.51	3.63	-	-	6.58	7.52	14.10	24.00	-9.90

Table 392 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(8) RSS-248	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	91.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6545	2.83	3.14	-	-	5.99	8.21	14.20	24.00	-9.80
6625	2.68	2.99	-	-	5.85	8.21	14.06	24.00	-9.94
6705	3.18	3.19	-	-	6.20	8.21	14.41	24.00	-9.59
6785	3.02	1.12	-	-	5.18	8.21	13.39	24.00	-10.61
6865	3.23	1.15	-	-	5.32	8.21	13.53	24.00	-10.47

Table 393 - Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8
Limit Clause(s):	15.407(a)(8) RSS-248	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	93.6
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	5.82
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6925	2.05	0.54	-	-	4.37	5.82	10.19	24.00	-13.81
7005	2.05	0.68	-	-	4.43	5.82	10.25	24.00	-13.75
7085	2.09	0.31	-	-	4.30	5.82	10.12	24.00	-13.88

Table 394 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8
Limit Clause(s):	15.407(a)(8) RSS-248	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	94.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	5.82
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6945	5.23	5.02	-	-	8.14	5.82	13.96	24.00	-10.04
7025	5.32	5.28	-	-	8.31	5.82	14.13	24.00	-9.87

Table 395 - Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(7) RSS-248	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	94.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	7.66
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5955	16.12	16.19	-	-	19.16	7.27	26.43	30.00	-3.57
6175	15.09	15.52	-	-	18.32	7.66	25.98	30.00	-4.02
6415	15.54	15.57	-	-	18.57	7.46	26.03	30.00	-3.97

Table 396 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(7) RSS-248	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	93.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	7.66
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5965	18.31	18.32	-	-	21.32	7.27	28.59	30.00	-1.41
6165	17.76	17.82	-	-	20.80	7.66	28.46	30.00	-1.54
6405	18.19	18.09	-	-	21.15	7.46	28.61	30.00	-1.39

Table 397 - Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(7) RSS-248	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	93.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	7.66
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5985	18.26	18.21	-	-	21.25	7.27	28.51	30.00	-1.49
6145	17.84	17.85	-	-	20.86	7.66	28.51	30.00	-1.49
6385	18.10	17.92	-	-	21.02	7.46	28.48	30.00	-1.52

Table 398 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407(a)(7) RSS-248	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	94.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	7.52
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6435	15.27	15.45	-	-	18.37	7.52	25.89	30.00	-4.11
6475	15.37	15.07	-	-	18.23	7.52	25.75	30.00	-4.25
6515	15.49	15.14	-	-	18.33	7.52	25.85	30.00	-4.15

Table 399 - Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407(a)(7) RSS-248	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	91.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	7.52
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6445	17.88	17.71	-	-	20.81	7.52	28.32	30.00	-1.68
6485	17.86	17.77	-	-	20.83	7.52	28.34	30.00	-1.66
6525	17.52	17.25	-	-	20.39	7.52	27.91	30.00	-2.09

Table 400 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407(a)(7) RSS-248	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	87.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6465	18.02	17.77	-	-	20.91	7.52	28.42	30.00	-1.58
6545	17.58	16.80	-	-	20.22	8.21	28.42	30.00	-1.58

Table 401 - Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(7) RSS-248	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	93.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6535	14.85	14.36	-	-	17.62	8.21	25.83	30.00	-4.17
6695	14.98	14.73	-	-	17.87	8.21	26.08	30.00	-3.92
6855	15.15	14.18	-	-	17.70	8.21	25.91	30.00	-4.09

Table 402 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(7) RSS-248	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	91.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6565	17.50	17.22	-	-	20.37	8.21	28.58	30.00	-1.42
6685	17.26	17.33	-	-	20.31	8.21	28.52	30.00	-1.48
6845	17.60	16.92	-	-	20.28	8.21	28.49	30.00	-1.51

Table 403 - Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(7) RSS-248	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	92.6
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6625	17.29	17.02	-	-	20.17	8.21	28.38	30.00	-1.62
6705	17.52	17.08	-	-	20.31	8.21	28.52	30.00	-1.48
6785	17.54	17.02	-	-	20.30	8.21	28.51	30.00	-1.49

Table 404 - Maximum Conducted (average) Output Power Results



FCC 47 CFR Part 15E, Limit Clause 15.407(a)(7)

For client devices, except for fixed client devices as defined in this subpart, operating under the control of a standard power access point in 5.925-6.425 GHz and 6.525-6.875 GHz bands, the maximum power spectral density must not exceed 17 dBm e.i.r.p. in any 1-megahertz band, and the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm and the device must limit its power to no more than 6 dB below its associated standard power access point's authorized transmit power.

FCC 47 CFR Part 15E, Limit Clause 15.407(a)(8)

For client devices operating under the control of an indoor access point in the 5.925–7.125 GHz bands, the maximum power spectral density must not exceed -1 dBm e.i.r.p. in any 1-megahertz band, and the maximum e.i.r.p. over the frequency band of operation must not exceed 24 dBm.

ISED RSS-248, Limit Clause 4.5.3

The following limits shall apply to low-power client devices.

- a) the maximum e.i.r.p. spectral density shall not exceed -1 dBm/MHz; and
- b) the maximum e.i.r.p. over the 5925-7125 MHz frequency band shall not exceed 24 dBm.

ISED RSS-248, Limit Clause 4.5.5

The following limits shall apply to standard client devices:

- a) the maximum e.i.r.p. spectral density shall not exceed 17 dBm/MHz.
- b) the maximum e.i.r.p. over the 5925-6875 MHz frequency band shall not exceed 30 dBm and
- c) the maximum power limits shall remain at least 6 dB below the power levels authorized for the associated standard-power access point.



2.4.7 Test Location and Test Equipment Used

This test was carried out in RF Chamber 18.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Hygrometer	Rotronic	I-1000	3068	12	07-Nov-2024
1800-6000 MHz Power Splitter	Mini-Circuits	ZN2PD-63-S+	4055	-	O/P Mon
Attenuator 5W 30dB DC-18GHz	Aaren	AT40A-4041-D18-30	5505	12	22-Feb-2025
2-Way Power Divider (2-8 GHz)	Aaren	AT30A-TE0208-2-AF	5685	12	02-Jan-2025
Digital Multimeter	Fluke	115	6145	12	06-Jun-2025
Directional Coupler 2-8GHz	RF-Lambda	RFDC2G8G10	6447	-	O/P Mon
Directional Coupler 2-8GHz	RF-Lambda	RFDC2G8G10	6448	-	O/P Mon
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	6517	12	22-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6526	12	22-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6527	12	05-Mar-2025
USB Wideband Power Sensor	Boonton	RTP5008	6585	12	20-Feb-2025
USB Wideband Power Sensor	Boonton	RTP5008	6586	12	20-Feb-2025
AC Programmable Power Supply	iTech	IT7324	6665	-	O/P Mon

Table 405

O/P Mon - Output Monitored using calibrated equipment



2.5 Maximum Conducted Power Spectral Density

2.5.1 Specification Reference

FCC 47 CFR Part 15E, Clause 15.407 (a)
ISED RSS-248, Clause 4.5

2.5.2 Equipment Under Test and Modification State

A3112, S/N: J6HWQT92RK - Modification State 0
A3112, S/N: DQH6Q99MH - Modification State 0

2.5.3 Date of Test

06-July-2024 to 27-September-2024

2.5.4 Test Method

The test was performed in accordance with KDB 789033, clause F.

Where the EUT duty cycle was $< 98\%$ and repeatable within $\pm 2\%$, the spectrum analyser was set to trace (power) averaging and a duty cycle correction was added as calculated in the result tables below (Method SA-2). Where the duty cycle was $\geq 98\%$ the spectrum analyser was set to trace (power) averaging and no duty cycle correction made (Method SA-1). In all other cases the spectrum analyser trace was set to max hold (Method SA-3).

The output power was verified as being the same from each transmit core (within negligible tolerances), but the antenna gains were not identical. Therefore, the modes reported for SISO or 2TX MIMO operation are those giving the highest EIRP and/or lowest conducted limit based on the combination of antennas giving highest total directional gain.

MIMO output port summing was performed in accordance with KDB 662911 D01:

For the CDD results the Directional Gain was calculated in accordance with the equation given in clause F)2)f)(ii) summed for a single spatial stream.

For SDM modes Directional Gain was calculated in accordance with clause F)2)d)(ii).

For transmit beamforming (TxBF) mode it was calculated in accordance with clause F)2)d)(i).

2.5.5 Environmental Conditions

Ambient Temperature	21.9 - 23.5 °C
Relative Humidity	46.5 - 58.2%



2.5.6 Test Results

6 GHz WLAN

SISO

Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(9)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a VLP	Duty Cycle (%):	98.4
Data Rate:	12 Mbps	DCCF (dB):	0.07
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.10
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6115	-12.58	-	-	-	-12.58	5.50	-7.08	-5.00	-2.08
6255	-12.62	-	-	-	-12.62	5.50	-7.12	-5.00	-2.12
6415	-12.56	-	-	-	-12.56	6.10	-6.46	-5.00	-1.46

Table 406 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(9)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a VLP	Duty Cycle (%):	98.2
Data Rate:	12 Mbps	DCCF (dB):	0.08
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6535	-12.90	-	-	-	-12.90	6.40	-6.50	-5.00	-1.50
6695	-13.06	-	-	-	-13.06	6.40	-6.66	-5.00	-1.66
6855	-13.27	-	-	-	-13.27	6.40	-6.87	-5.00	-1.87

Table 407 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(9)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU VLP	Duty Cycle (%):	98.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.07
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.10
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6115	-13.46	-	-	-	-13.46	5.50	-7.96	-5.00	-2.96
6255	-13.46	-	-	-	-13.46	5.50	-7.96	-5.00	-2.96
6415	-13.09	-	-	-	-13.09	6.10	-6.99	-5.00	-1.99

Table 408 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(9)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU VLP	Duty Cycle (%):	97.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.13
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6535	-14.24	-	-	-	-14.24	6.40	-7.84	-5.00	-2.84
6695	-14.54	-	-	-	-14.54	6.40	-8.14	-5.00	-3.14
6855	-13.92	-	-	-	-13.92	6.40	-7.52	-5.00	-2.52

Table 409 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(9)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU VLP	Duty Cycle (%):	97.6
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.10
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6125	-13.55	-	-	-	-13.55	5.50	-8.05	-5.00	-3.05
6245	-13.64	-	-	-	-13.64	5.50	-8.14	-5.00	-3.14
6405	-13.82	-	-	-	-13.82	6.10	-7.72	-5.00	-2.72

Table 410 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(9)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU VLP	Duty Cycle (%):	94.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.25
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6565	-13.66	-	-	-	-13.66	6.40	-7.26	-5.00	-2.26
6685	-13.59	-	-	-	-13.59	6.40	-7.19	-5.00	-2.19
6845	-13.79	-	-	-	-13.79	6.40	-7.39	-5.00	-2.39

Table 411 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(9)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU VLP	Duty Cycle (%):	97.8
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.10
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6145	-13.24	-	-	-	-13.24	5.50	-7.74	-5.00	-2.74
6225	-12.90	-	-	-	-12.90	5.50	-7.40	-5.00	-2.40
6385	-13.53	-	-	-	-13.53	6.10	-7.43	-5.00	-2.43

Table 412 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(9)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU VLP	Duty Cycle (%):	97.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.13
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6625	-13.67	-	-	-	-13.67	6.40	-7.27	-5.00	-2.27
6705	-13.18	-	-	-	-13.18	6.40	-6.78	-5.00	-1.78
6785	-13.38	-	-	-	-13.38	6.40	-6.98	-5.00	-1.98

Table 413 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(9)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU VLP	Duty Cycle (%):	97.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.11
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.10
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6185	-12.67	-	-	-	-12.67	5.50	-7.17	-5.00	-2.17
6345	-13.19	-	-	-	-13.19	6.10	-7.09	-5.00	-2.09

Table 414 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(9)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU VLP	Duty Cycle (%):	94.8
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.23
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6665	-13.42	-	-	-	-13.42	6.40	-7.02	-5.00	-2.02

Table 415 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a LPI	Duty Cycle (%):	99.1
Data Rate:	12 Mbps	DCCF (dB):	0.04
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.10
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5955	-7.36	-	-	-	-7.36	5.20	-2.16	-1.00	-1.16
6175	-9.14	-	-	-	-9.14	5.50	-3.64	-1.00	-2.64
6415	-8.57	-	-	-	-8.57	6.10	-2.47	-1.00	-1.47

Table 416 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	98.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.06
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.10
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5955	-8.35	-	-	-	-8.35	5.20	-3.15	-1.00	-2.15
6175	-9.49	-	-	-	-9.49	5.50	-3.99	-1.00	-2.99
6415	-9.18	-	-	-	-9.18	6.10	-3.08	-1.00	-2.08

Table 417 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	98.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.07
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.10
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5965	-8.37	-	-	-	-8.37	5.20	-3.17	-1.00	-2.17
6165	-9.16	-	-	-	-9.16	5.50	-3.66	-1.00	-2.66
6405	-8.98	-	-	-	-8.98	6.10	-2.88	-1.00	-1.88

Table 418 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	98.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.09
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.10
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5985	-8.30	-	-	-	-8.30	5.20	-3.10	-1.00	-2.10
6145	-9.19	-	-	-	-9.19	5.50	-3.69	-1.00	-2.69
6385	-9.16	-	-	-	-9.16	6.10	-3.06	-1.00	-2.06

Table 419 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	96.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.15
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.10
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6025	-8.08	-	-	-	-8.08	5.20	-2.88	-1.00	-1.88
6185	-7.67	-	-	-	-7.67	5.50	-2.17	-1.00	-1.17
6345	-8.64	-	-	-	-8.64	6.10	-2.54	-1.00	-1.54

Table 420 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a LPI	Duty Cycle (%):	99.1
Data Rate:	12 Mbps	DCCF (dB):	0.04
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.00
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6435	-8.96	-	-	-	-8.96	6.00	-2.96	-1.00	-1.96
6475	-9.35	-	-	-	-9.35	6.00	-3.35	-1.00	-2.35
6515	-9.00	-	-	-	-9.00	6.00	-3.00	-1.00	-2.00

Table 421 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	97.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.11
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.00
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6435	-9.21	-	-	-	-9.21	6.00	-3.21	-1.00	-2.21
6475	-9.31	-	-	-	-9.31	6.00	-3.31	-1.00	-2.31
6515	-9.12	-	-	-	-9.12	6.00	-3.12	-1.00	-2.12

Table 422 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	97.6
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.11
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.00
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6445	-9.59	-	-	-	-9.59	6.00	-3.59	-1.00	-2.59
6485	-9.62	-	-	-	-9.62	6.00	-3.62	-1.00	-2.62
6525	-9.36	-	-	-	-9.36	6.00	-3.36	-1.00	-2.36

Table 423 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	97.8
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.00
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6465	-9.45	-	-	-	-9.45	6.00	-3.45	-1.00	-2.45

Table 424 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	95.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.21
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.00
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6505	-9.09	-	-	-	-9.09	6.00	-3.09	-1.00	-2.09

Table 425 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a LPI	Duty Cycle (%):	97.5
Data Rate:	12 Mbps	DCCF (dB):	0.11
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6535	-9.16	-	-	-	-9.16	6.40	-2.76	-1.00	-1.76
6695	-9.15	-	-	-	-9.15	6.40	-2.75	-1.00	-1.75
6855	-9.30	-	-	-	-9.30	6.40	-2.90	-1.00	-1.90
6875	-9.29	-	-	-	-9.29	6.40	-2.89	-1.00	-1.89

Table 426 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	96.6
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.15
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6535	-9.87	-	-	-	-9.87	6.40	-3.47	-1.00	-2.47
6695	-9.25	-	-	-	-9.25	6.40	-2.85	-1.00	-1.85
6855	-9.40	-	-	-	-9.40	6.40	-3.00	-1.00	-2.00
6875	-9.57	-	-	-	-9.57	6.40	-3.17	-1.00	-2.17

Table 427 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	96.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.15
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6565	-9.70	-	-	-	-9.70	6.40	-3.30	-1.00	-2.30
6685	-9.72	-	-	-	-9.72	6.40	-3.32	-1.00	-2.32
6845	-9.88	-	-	-	-9.88	6.40	-3.48	-1.00	-2.48

Table 428 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	96.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.16
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6545	-9.09	-	-	-	-9.09	6.40	-2.69	-1.00	-1.69
6625	-9.39	-	-	-	-9.39	6.40	-2.99	-1.00	-1.99
6705	-9.22	-	-	-	-9.22	6.40	-2.82	-1.00	-1.82
6785	-9.12	-	-	-	-9.12	6.40	-2.72	-1.00	-1.72
6865	-9.06	-	-	-	-9.06	6.40	-2.66	-1.00	-1.66

Table 429 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	94.2
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.26
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6665	-9.03	-	-	-	-9.03	6.40	-2.63	-1.00	-1.63
6825	-8.51	-	-	-	-8.51	6.40	-2.11	-1.00	-1.11

Table 430 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a LPI	Duty Cycle (%):	98.0
Data Rate:	12 Mbps	DCCF (dB):	0.09
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	4.10
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6895	-6.50	-	-	-	-6.50	4.10	-2.40	-1.00	-1.40
6995	-6.49	-	-	-	-6.49	4.10	-2.39	-1.00	-1.39
7115	-15.51	-	-	-	-15.51	4.10	-11.41	-1.00	-10.41

Table 431 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	96.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.14
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	4.10
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6895	-6.83	-	-	-	-6.83	4.10	-2.73	-1.00	-1.73
6995	-7.01	-	-	-	-7.01	4.10	-2.91	-1.00	-1.91
7095	-6.92	-	-	-	-6.92	4.10	-2.82	-1.00	-1.82

Table 432 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	96.8
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.14
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6885	-9.61	-	-	-	-9.61	6.40	-3.21	-1.00	-2.21
6925	-7.44	-	-	-	-7.44	4.10	-3.34	-1.00	-2.34
7005	-7.19	-	-	-	-7.19	4.10	-3.09	-1.00	-2.09
7085	-7.58	-	-	-	-7.58	4.10	-3.48	-1.00	-2.48

Table 433 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	96.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.16
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	4.10
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6945	-7.11	-	-	-	-7.11	4.10	-3.01	-1.00	-2.01
7025	-7.01	-	-	-	-7.01	4.10	-2.91	-1.00	-1.91

Table 434 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	94.8
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.23
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	4.10
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6985	-6.42	-	-	-	-6.42	4.10	-2.32	-1.00	-1.32

Table 435 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26 LPI	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5955 (RU26.0)	-7.96	-	-	-	-7.96	5.20	-2.76	-1.00	-1.76
6175 (RU26.0)	-9.49	-	-	-	-9.49	5.50	-3.99	-1.00	-2.99
6415 (RU26.8)	-9.04	-	-	-	-9.04	6.10	-2.94	-1.00	-1.94
6435 (RU26.0)	-9.42	-	-	-	-9.42	6.00	-3.42	-1.00	-2.42
6475 (RU26.0)	-9.39	-	-	-	-9.39	6.00	-3.39	-1.00	-2.39
6515 (RU26.8)	-8.99	-	-	-	-8.99	6.00	-2.99	-1.00	-1.99
6535 (RU26.0)	-9.53	-	-	-	-9.53	6.40	-3.13	-1.00	-2.13
6695 (RU26.0)	-9.50	-	-	-	-9.50	6.40	-3.10	-1.00	-2.10
6855 (RU26.8)	-9.52	-	-	-	-9.52	6.40	-3.12	-1.00	-2.12
6875 (RU26.3)	-9.68	-	-	-	-9.68	6.40	-3.28	-1.00	-2.28
6875 (RU26.5)	-9.91	-	-	-	-9.91	6.40	-3.51	-1.00	-2.51
6895 (RU26.0)	-7.21	-	-	-	-7.21	4.10	-3.11	-1.00	-2.11
6995 (RU26.0)	-7.52	-	-	-	-7.52	4.10	-3.42	-1.00	-2.42
7095 (RU26.8)	-7.08	-	-	-	-7.08	4.10	-2.98	-1.00	-1.98

Table 436 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52 LPI	Duty Cycle (%):	97.2
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5955 (RU52.37)	-8.07	-	-	-	-8.07	5.20	-2.87	-1.00	-1.87
6175 (RU52.37)	-9.45	-	-	-	-9.45	5.50	-3.95	-1.00	-2.95
6415 (RU52.40)	-8.83	-	-	-	-8.83	6.10	-2.73	-1.00	-1.73
6435 (RU52.37)	-8.66	-	-	-	-8.66	6.00	-2.66	-1.00	-1.66
6475 (RU52.37)	-8.82	-	-	-	-8.82	6.00	-2.82	-1.00	-1.82
6515 (RU52.40)	-8.70	-	-	-	-8.70	6.00	-2.70	-1.00	-1.70
6535 (RU52.37)	-8.79	-	-	-	-8.79	6.40	-2.39	-1.00	-1.39
6695 (RU52.37)	-9.49	-	-	-	-9.49	6.40	-3.09	-1.00	-2.09
6855 (RU52.40)	-9.52	-	-	-	-9.52	6.40	-3.12	-1.00	-2.12
6875 (RU52.38)	-9.34	-	-	-	-9.34	6.40	-2.94	-1.00	-1.94
6875 (RU52.39)	-9.21	-	-	-	-9.21	6.40	-2.81	-1.00	-1.81
6895 (RU52.37)	-6.87	-	-	-	-6.87	4.10	-2.77	-1.00	-1.77
6995 (RU52.37)	-6.99	-	-	-	-6.99	4.10	-2.89	-1.00	-1.89
7095 (RU52.40)	-6.96	-	-	-	-6.96	4.10	-2.86	-1.00	-1.86

Table 437 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106 LPI	Duty Cycle (%):	98.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.08
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5955 (RU106.53)	-7.64	-	-	-	-7.64	5.20	-2.44	-1.00	-1.44
6175 (RU106.53)	-8.93	-	-	-	-8.93	5.50	-3.43	-1.00	-2.43
6415 (RU106.54)	-8.66	-	-	-	-8.66	6.10	-2.56	-1.00	-1.56
6435 (RU106.53)	-8.58	-	-	-	-8.58	6.00	-2.58	-1.00	-1.58
6475 (RU106.53)	-8.97	-	-	-	-8.97	6.00	-2.97	-1.00	-1.97
6515 (RU106.54)	-8.85	-	-	-	-8.85	6.00	-2.85	-1.00	-1.85
6535 (RU106.53)	-8.79	-	-	-	-8.79	6.40	-2.39	-1.00	-1.39
6695 (RU106.53)	-9.19	-	-	-	-9.19	6.40	-2.79	-1.00	-1.79
6855 (RU106.54)	-9.28	-	-	-	-9.28	6.40	-2.88	-1.00	-1.88
6875 (RU106.53)	-9.12	-	-	-	-9.12	6.40	-2.72	-1.00	-1.72
6875 (RU106.54)	-9.15	-	-	-	-9.15	6.40	-2.75	-1.00	-1.75
6895 (RU106.53)	-6.95	-	-	-	-6.95	4.10	-2.85	-1.00	-1.85
6995 (RU106.53)	-6.92	-	-	-	-6.92	4.10	-2.82	-1.00	-1.82
7095 (RU106.54)	-6.92	-	-	-	-6.92	4.10	-2.82	-1.00	-1.82

Table 438 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a SP	Duty Cycle (%):	98.2
Data Rate:	12 Mbps	DCCF (dB):	0.08
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.10
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5955	9.93	-	-	-	9.93	5.20	15.13	17.00	-1.87
6175	9.23	-	-	-	9.23	5.50	14.73	17.00	-2.27
6415	8.97	-	-	-	8.97	6.10	15.07	17.00	-1.93

Table 439 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	97.6
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.11
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.10
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5955	9.68	-	-	-	9.68	5.20	14.88	17.00	-2.12
6175	8.09	-	-	-	8.09	5.50	13.59	17.00	-3.41
6415	8.61	-	-	-	8.61	6.10	14.71	17.00	-2.29

Table 440 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	98.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.07
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.10
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5965	6.07	-	-	-	6.07	5.20	11.27	17.00	-5.73
6165	6.00	-	-	-	6.00	5.50	11.50	17.00	-5.50
6405	6.89	-	-	-	6.89	6.10	12.99	17.00	-4.01

Table 441 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	98.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.09
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.10
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5985	3.44	-	-	-	3.44	5.20	8.64	17.00	-8.36
6145	4.20	-	-	-	4.20	5.50	9.70	17.00	-7.30
6385	4.22	-	-	-	4.22	6.10	10.32	17.00	-6.68

Table 442 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU SP	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.10
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6025	-0.47	-	-	-	-0.47	5.20	4.73	17.00	-12.27
6185	-0.30	-	-	-	-0.30	5.50	5.20	17.00	-11.80
6345	-0.63	-	-	-	-0.63	6.10	5.47	17.00	-11.53

Table 443 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a SP	Duty Cycle (%):	98.9
Data Rate:	12 Mbps	DCCF (dB):	0.05
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.00
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6435	8.98	-	-	-	8.98	6.00	14.98	17.00	-2.02
6475	8.86	-	-	-	8.86	6.00	14.86	17.00	-2.14
6515	9.02	-	-	-	9.02	6.00	15.02	17.00	-1.98

Table 444 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	97.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.13
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.00
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6435	8.52	-	-	-	8.52	6.00	14.52	17.00	-2.48
6475	8.09	-	-	-	8.09	6.00	14.09	17.00	-2.91
6515	8.82	-	-	-	8.82	6.00	14.82	17.00	-2.18

Table 445 - ISED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.00
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6445	6.91	-	-	-	6.91	6.00	12.91	17.00	-4.09
6485	6.46	-	-	-	6.46	6.00	12.46	17.00	-4.54
6525	6.90	-	-	-	6.90	6.00	12.90	17.00	-4.10

Table 446 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	98.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.07
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.00
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6465	3.91	-	-	-	3.91	6.00	9.91	17.00	-7.09
6545	4.29	-	-	-	4.29	6.40	10.69	17.00	-6.31

Table 447 - ISED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU SP	Duty Cycle (%):	96.8
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.14
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.00
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6505	-1.40	-	-	-	-1.40	6.00	4.60	17.00	-12.40

Table 448 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a SP	Duty Cycle (%):	98.1
Data Rate:	12 Mbps	DCCF (dB):	0.08
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6535	8.80	-	-	-	8.80	6.40	15.20	17.00	-1.80
6695	8.90	-	-	-	8.90	6.40	15.30	17.00	-1.70
6855	8.68	-	-	-	8.68	6.40	15.08	17.00	-1.92

Table 449 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	97.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.13
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6535	8.53	-	-	-	8.53	6.40	14.93	17.00	-2.07
6695	8.66	-	-	-	8.66	6.40	15.06	17.00	-1.94
6855	8.05	-	-	-	8.05	6.40	14.45	17.00	-2.55

Table 450 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	96.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.16
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6565	7.06	-	-	-	7.06	6.40	13.46	17.00	-3.54
6685	7.03	-	-	-	7.03	6.40	13.43	17.00	-3.57
6845	7.02	-	-	-	7.02	6.40	13.42	17.00	-3.58

Table 451 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	96.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.15
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6625	4.10	-	-	-	4.10	6.40	10.50	17.00	-6.50
6705	4.57	-	-	-	4.57	6.40	10.97	17.00	-6.03
6785	4.33	-	-	-	4.33	6.40	10.73	17.00	-6.27

Table 452 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU SP	Duty Cycle (%):	95.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.22
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6665	-0.78	-	-	-	-0.78	6.40	5.62	17.00	-11.38

Table 453 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26 SP	Duty Cycle (%):	98.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.07
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.10
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5955 (RU26.0)	9.39	-	-	-	9.39	5.20	14.59	17.00	-2.41
6175 (RU26.0)	9.03	-	-	-	9.03	5.50	14.53	17.00	-2.47
6415 (RU26.8)	8.39	-	-	-	8.39	6.10	14.49	17.00	-2.51

Table 454 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52 SP	Duty Cycle (%):	98.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.07
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.10
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5955 (RU52.37)	10.03	-	-	-	10.03	5.20	15.23	17.00	-1.77
6175 (RU52.37)	8.57	-	-	-	8.57	5.50	14.07	17.00	-2.93
6415 (RU52.40)	8.77	-	-	-	8.77	6.10	14.87	17.00	-2.13

Table 455 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106 SP	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.10
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5955 (RU106.53)	10.10	-	-	-	10.10	5.20	15.30	17.00	-1.70
6175 (RU106.53)	8.40	-	-	-	8.40	5.50	13.90	17.00	-3.10
6415 (RU106.54)	8.94	-	-	-	8.94	6.10	15.04	17.00	-1.96

Table 456 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26 SP	Duty Cycle (%):	98.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.09
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.00
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6435 (RU26.0)	8.93	-	-	-	8.93	6.00	14.93	17.00	-2.07
6475 (RU26.0)	8.36	-	-	-	8.36	6.00	14.36	17.00	-2.64
6515 (RU26.8)	8.57	-	-	-	8.57	6.00	14.57	17.00	-2.43

Table 457 - ISED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52 SP	Duty Cycle (%):	98.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.08
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.00
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6435 (RU52.37)	8.60	-	-	-	8.60	6.00	14.60	17.00	-2.40
6475 (RU52.37)	8.72	-	-	-	8.72	6.00	14.72	17.00	-2.28
6515 (RU52.40)	8.65	-	-	-	8.65	6.00	14.65	17.00	-2.35

Table 458 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106 SP	Duty Cycle (%):	98.2
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.08
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.00
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6435 (RU106.53)	8.90	-	-	-	8.90	6.00	14.90	17.00	-2.10
6475 (RU106.53)	8.39	-	-	-	8.39	6.00	14.39	17.00	-2.61
6515 (RU106.54)	9.13	-	-	-	9.13	6.00	15.13	17.00	-1.87

Table 459 - ISED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26 SP	Duty Cycle (%):	97.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.11
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6535 (RU26.0)	8.24	-	-	-	8.24	6.40	14.64	17.00	-2.36
6695 (RU26.0)	8.27	-	-	-	8.27	6.40	14.67	17.00	-2.33
6855 (RU26.8)	8.41	-	-	-	8.41	6.40	14.81	17.00	-2.19

Table 460 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52 SP	Duty Cycle (%):	96.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.14
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6535 (RU52.37)	8.70	-	-	-	8.70	6.40	15.10	17.00	-1.90
6695 (RU52.37)	8.31	-	-	-	8.31	6.40	14.71	17.00	-2.29
6855 (RU52.40)	8.29	-	-	-	8.29	6.40	14.69	17.00	-2.31

Table 461 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106 SP	Duty Cycle (%):	98.2
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.08
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6535 (RU106.53)	8.60	-	-	-	8.60	6.40	15.00	17.00	-2.00
6695 (RU106.53)	8.85	-	-	-	8.85	6.40	15.25	17.00	-1.75
6855 (RU106.54)	8.42	-	-	-	8.42	6.40	14.82	17.00	-2.18

Table 462 - Maximum Power Spectral Density Results



MIMO CDD

Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(9)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU VLP	Duty Cycle (%):	97.2
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	7.66
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6145	-19.35	-18.73	-	-	-16.02	7.66	-8.37	-5.00	-3.37
6225	-19.76	-18.18	-	-	-15.89	7.66	-8.23	-5.00	-3.23
6385	-18.62	-18.01	-	-	-15.30	7.46	-7.84	-5.00	-2.84

Table 463 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(9)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU VLP	Duty Cycle (%):	96.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.15
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6625	-19.62	-18.85	-	-	-16.21	8.21	-8.00	-5.00	-3.00
6705	-18.40	-18.23	-	-	-15.30	8.21	-7.10	-5.00	-2.10
6785	-18.63	-18.68	-	-	-15.65	8.21	-7.44	-5.00	-2.44

Table 464 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(9)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU VLP	Duty Cycle (%):	96.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.15
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	7.66
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6185	-17.42	-17.78	-	-	-14.59	7.66	-6.93	-5.00	-1.93
6345	-17.69	-17.66	-	-	-14.66	7.46	-7.21	-5.00	-2.21

Table 465 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(9)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU VLP	Duty Cycle (%):	94.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.25
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6665	-18.48	-18.15	-	-	-15.30	8.21	-7.09	-5.00	-2.09

Table 466 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	98.2
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.08
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	7.66
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5955	-14.36	-13.65	-	-	-10.98	7.27	-3.72	-1.00	-2.72
6175	-15.01	-14.73	-	-	-11.86	7.66	-4.20	-1.00	-3.20
6415	-14.31	-14.01	-	-	-11.15	7.46	-3.69	-1.00	-2.69

Table 467 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	96.6
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.15
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	7.66
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5965	-14.03	-13.96	-	-	-10.99	7.27	-3.72	-1.00	-2.72
6165	-16.29	-14.85	-	-	-12.50	7.66	-4.84	-1.00	-3.84
6405	-14.28	-13.94	-	-	-11.10	7.46	-3.64	-1.00	-2.64

Table 468 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	98.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.08
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	7.66
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5985	-13.66	-13.74	-	-	-10.69	7.27	-3.42	-1.00	-2.42
6145	-14.52	-13.96	-	-	-11.22	7.66	-3.56	-1.00	-2.56
6385	-13.60	-13.69	-	-	-10.63	7.46	-3.18	-1.00	-2.18

Table 469 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	97.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.09
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	7.66
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6025	-13.01	-12.93	-	-	-9.96	7.27	-2.69	-1.00	-1.69
6185	-12.87	-12.87	-	-	-9.86	7.66	-2.20	-1.00	-1.20
6345	-12.80	-12.96	-	-	-9.87	7.46	-2.41	-1.00	-1.41

Table 470 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	97.2
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	7.52
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6435	-14.09	-13.81	-	-	-10.94	7.52	-3.42	-1.00	-2.42
6475	-14.26	-14.37	-	-	-11.30	7.52	-3.79	-1.00	-2.79
6515	-13.87	-13.91	-	-	-10.88	7.52	-3.36	-1.00	-2.36

Table 471 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	94.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.26
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	7.52
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6445	-15.15	-14.63	-	-	-11.87	7.52	-4.36	-1.00	-3.36
6485	-14.68	-14.69	-	-	-11.67	7.52	-4.16	-1.00	-3.16
6525	-14.82	-14.29	-	-	-11.54	7.52	-4.02	-1.00	-3.02

Table 472 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	97.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.09
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	7.52
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6465	-13.68	-13.67	-	-	-10.66	7.52	-3.15	-1.00	-2.15

Table 473 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	95.8
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.18
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	7.52
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6505	-14.24	-13.44	-	-	-10.81	7.52	-3.29	-1.00	-2.29

Table 474 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	96.6
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.15
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6535	-14.49	-14.20	-	-	-11.33	8.21	-3.12	-1.00	-2.12
6695	-14.63	-14.30	-	-	-11.45	8.21	-3.25	-1.00	-2.25
6855	-14.84	-15.33	-	-	-12.07	8.21	-3.86	-1.00	-2.86
6875	-14.17	-14.62	-	-	-11.38	8.21	-3.17	-1.00	-2.17

Table 475 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	92.8
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.33
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6565	-14.67	-14.76	-	-	-11.70	8.21	-3.50	-1.00	-2.50
6685	-14.83	-14.83	-	-	-11.82	8.21	-3.61	-1.00	-2.61
6845	-14.96	-14.77	-	-	-11.85	8.21	-3.65	-1.00	-2.65

Table 476 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	95.8
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.19
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6545	-15.19	-14.32	-	-	-11.72	8.21	-3.52	-1.00	-2.52
6625	-15.41	-14.82	-	-	-12.10	8.21	-3.89	-1.00	-2.89
6705	-14.75	-14.81	-	-	-11.77	8.21	-3.56	-1.00	-2.56
6785	-14.22	-14.42	-	-	-11.31	8.21	-3.10	-1.00	-2.10
6865	-14.41	-15.03	-	-	-11.70	8.21	-3.49	-1.00	-2.49

Table 477 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	94.6
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.24
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6665	-13.74	-13.50	-	-	-10.61	8.21	-2.40	-1.00	-1.40
6825	-13.69	-13.54	-	-	-10.60	8.21	-2.40	-1.00	-1.40

Table 478 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	96.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.15
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	5.82
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6895	-12.21	-12.52	-	-	-9.35	5.82	-3.53	-1.00	-2.53
6995	-12.85	-12.61	-	-	-9.72	5.82	-3.89	-1.00	-2.89
7095	-12.67	-12.40	-	-	-9.52	5.82	-3.70	-1.00	-2.70

Table 479 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	93.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.31
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6885	-14.37	-14.59	-	-	-11.46	8.21	-3.26	-1.00	-2.26
6925	-12.58	-12.77	-	-	-9.67	5.82	-3.84	-1.00	-2.84
7005	-12.71	-12.78	-	-	-9.74	5.82	-3.91	-1.00	-2.91
7085	-12.72	-12.72	-	-	-9.71	5.82	-3.88	-1.00	-2.88

Table 480 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	96.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.15
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	5.82
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6945	-11.99	-12.02	-	-	-8.99	5.82	-3.17	-1.00	-2.17
7025	-12.09	-11.56	-	-	-8.81	5.82	-2.98	-1.00	-1.98

Table 481 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	95.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.22
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	5.82
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6985	-11.26	-11.53	-	-	-8.38	5.82	-2.56	-1.00	-1.56

Table 482 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52 LPI	Duty Cycle (%):	95.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.18
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	7.66
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5955 (RU52.37)	-14.08	-12.79	-	-	-10.38	7.27	-3.11	-1.00	-2.11
6175 (RU52.37)	-14.55	-14.08	-	-	-11.30	7.66	-3.64	-1.00	-2.64
6415 (RU52.40)	-14.54	-13.24	-	-	-10.83	7.46	-3.38	-1.00	-2.38

Table 483 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106 LPI	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.06
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	7.66
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5955 (RU106.53)	-13.08	-12.94	-	-	-10.00	7.27	-2.73	-1.00	-1.73
6175 (RU106.53)	-14.55	-14.26	-	-	-11.39	7.66	-3.73	-1.00	-2.73
6415 (RU106.54)	-14.09	-13.42	-	-	-10.73	7.46	-3.28	-1.00	-2.28

Table 484 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52 LPI	Duty Cycle (%):	96.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.14
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	7.52
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6435 (RU52.37)	-14.19	-13.21	-	-	-10.66	7.52	-3.15	-1.00	-2.15
6475 (RU52.37)	-13.67	-13.89	-	-	-10.77	7.52	-3.25	-1.00	-2.25
6515 (RU52.40)	-13.46	-13.23	-	-	-10.33	7.52	-2.82	-1.00	-1.82

Table 485 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106 LPI	Duty Cycle (%):	98.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.06
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	7.52
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6435 (RU106.53)	-13.94	-13.44	-	-	-10.67	7.52	-3.15	-1.00	-2.15
6475 (RU106.53)	-13.64	-13.86	-	-	-10.74	7.52	-3.22	-1.00	-2.22
6515 (RU106.54)	-13.32	-13.55	-	-	-10.42	7.52	-2.91	-1.00	-1.91

Table 486 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52 LPI	Duty Cycle (%):	95.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.20
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6535 (RU52.37)	-14.24	-13.75	-	-	-10.98	8.21	-2.77	-1.00	-1.77
6695 (RU52.37)	-14.22	-14.11	-	-	-11.16	8.21	-2.95	-1.00	-1.95
6855 (RU52.40)	-13.94	-14.08	-	-	-11.00	8.21	-2.79	-1.00	-1.79
6875 (RU52.38)	-13.99	-14.17	-	-	-11.07	8.21	-2.86	-1.00	-1.86

Table 487 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106 LPI	Duty Cycle (%):	98.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.09
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6535 (RU106.53)	-13.99	-13.62	-	-	-10.79	8.21	-2.59	-1.00	-1.59
6695 (RU106.53)	-13.99	-13.81	-	-	-10.89	8.21	-2.68	-1.00	-1.68
6855 (RU106.54)	-14.22	-14.25	-	-	-11.22	8.21	-3.02	-1.00	-2.02
6875 (RU106.53)	-14.37	-14.07	-	-	-11.21	8.21	-3.00	-1.00	-2.00

Table 488 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52 LPI	Duty Cycle (%):	97.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.11
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	5.82
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6875 (RU52.39)	-14.17	-14.03	-	-	-11.09	8.21	-2.88	-1.00	-1.88
6895 (RU52.37)	-11.70	-12.08	-	-	-8.88	5.82	-3.05	-1.00	-2.05
6995 (RU52.37)	-12.17	-12.10	-	-	-9.13	5.82	-3.30	-1.00	-2.30
7095 (RU52.40)	-12.24	-11.84	-	-	-9.03	5.82	-3.20	-1.00	-2.20

Table 489 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106 LPI	Duty Cycle (%):	98.2
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.08
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	5.82
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6875 (RU106.54)	-14.18	-14.22	-	-	-11.19	8.21	-2.98	-1.00	-1.98
6895 (RU106.53)	-11.80	-11.79	-	-	-8.78	5.82	-2.96	-1.00	-1.96
6995 (RU106.53)	-11.85	-11.75	-	-	-8.79	5.82	-2.96	-1.00	-1.96
7095 (RU106.54)	-11.88	-11.98	-	-	-8.92	5.82	-3.10	-1.00	-2.10

Table 490 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	98.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.08
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	7.66
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5955	4.22	4.47	-	-	7.35	7.27	14.62	17.00	-2.38
6175	3.16	3.44	-	-	6.31	7.66	13.97	17.00	-3.03
6415	4.48	4.36	-	-	7.43	7.46	14.88	17.00	-2.12

Table 491 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	98.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.08
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	7.66
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5965	4.91	4.79	-	-	7.86	7.27	15.13	17.00	-1.87
6165	3.31	3.78	-	-	6.56	7.66	14.22	17.00	-2.78
6405	4.69	4.43	-	-	7.57	7.46	15.03	17.00	-1.97

Table 492 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	98.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.07
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	7.66
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5985	2.31	2.12	-	-	5.23	7.27	12.50	17.00	-4.50
6145	2.71	2.69	-	-	5.71	7.66	13.37	17.00	-3.63
6385	2.59	2.06	-	-	5.34	7.46	12.80	17.00	-4.20

Table 493 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU SP	Duty Cycle (%):	96.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.17
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	7.66
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6025	-0.35	-0.63	-	-	2.52	7.27	9.79	17.00	-7.21
6185	-0.39	-0.14	-	-	2.75	7.66	10.41	17.00	-6.59
6345	-0.13	-0.42	-	-	2.74	7.46	10.19	17.00	-6.81

Table 494 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	7.52
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6435	3.98	3.95	-	-	6.98	7.52	14.49	17.00	-2.51
6475	3.96	3.95	-	-	6.97	7.52	14.48	17.00	-2.52
6515	3.95	4.20	-	-	7.09	7.52	14.61	17.00	-2.39

Table 495 - ISED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.11
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	7.52
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6445	4.26	4.16	-	-	7.22	7.52	14.74	17.00	-2.26
6485	3.96	4.01	-	-	6.99	7.52	14.51	17.00	-2.49
6525	4.03	4.32	-	-	7.19	7.52	14.70	17.00	-2.30

Table 496 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	97.8
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	7.52
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6465	2.18	2.28	-	-	5.24	7.52	12.76	17.00	-4.24
6545	2.62	2.17	-	-	5.41	8.21	13.62	17.00	-3.38

Table 497 - ISED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU SP	Duty Cycle (%):	97.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.13
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	7.52
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6505	-1.32	-1.20	-	-	1.75	7.52	9.27	17.00	-7.73

Table 498 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	96.6
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.15
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6535	3.66	3.79	-	-	6.74	8.21	14.95	17.00	-2.05
6695	3.55	3.29	-	-	6.43	8.21	14.64	17.00	-2.36
6855	3.46	3.58	-	-	6.53	8.21	14.73	17.00	-2.27

Table 499 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	96.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.18
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6565	4.13	3.58	-	-	6.87	8.21	15.08	17.00	-1.92
6685	3.92	3.58	-	-	6.76	8.21	14.97	17.00	-2.03
6845	3.68	3.63	-	-	6.67	8.21	14.87	17.00	-2.13

Table 500 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	96.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.17
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6625	1.88	1.84	-	-	4.87	8.21	13.08	17.00	-3.92
6705	2.53	2.18	-	-	5.37	8.21	13.57	17.00	-3.43
6785	2.26	2.17	-	-	5.23	8.21	13.43	17.00	-3.57

Table 501 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU SP	Duty Cycle (%):	95.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.22
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6665	-0.95	-0.77	-	-	2.15	8.21	10.36	17.00	-6.64

Table 502 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26 SP	Duty Cycle (%):	98.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.09
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	7.66
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5955 (RU26.0)	3.90	4.29	-	-	7.11	7.27	14.38	17.00	-2.62
6175 (RU26.0)	2.56	3.09	-	-	5.84	7.66	13.50	17.00	-3.50
6415 (RU26.8)	3.89	4.22	-	-	7.07	7.46	14.52	17.00	-2.48

Table 503 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52 SP	Duty Cycle (%):	98.2
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.08
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	7.66
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5955 (RU52.37)	4.54	4.96	-	-	7.77	7.27	15.03	17.00	-1.97
6175 (RU52.37)	3.23	3.56	-	-	6.41	7.66	14.07	17.00	-2.93
6415 (RU52.40)	4.09	4.70	-	-	7.42	7.46	14.87	17.00	-2.13

Table 504 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106 SP	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	7.66
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5955 (RU106.53)	4.75	5.33	-	-	8.06	7.27	15.33	17.00	-1.67
6175 (RU106.53)	3.19	3.57	-	-	6.39	7.66	14.05	17.00	-2.95
6415 (RU106.54)	4.04	4.61	-	-	7.34	7.46	14.80	17.00	-2.20

Table 505 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26 SP	Duty Cycle (%):	98.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.08
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	7.52
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6435 (RU26.0)	3.55	4.10	-	-	6.85	7.52	14.36	17.00	-2.64
6475 (RU26.0)	3.56	3.71	-	-	6.65	7.52	14.16	17.00	-2.84
6515 (RU26.8)	3.61	3.83	-	-	6.73	7.52	14.25	17.00	-2.75

Table 506 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52 SP	Duty Cycle (%):	97.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.11
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	7.52
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6435 (RU52.37)	3.99	4.37	-	-	7.19	7.52	14.71	17.00	-2.29
6475 (RU52.37)	3.75	4.24	-	-	7.01	7.52	14.53	17.00	-2.47
6515 (RU52.40)	4.04	4.70	-	-	7.39	7.52	14.91	17.00	-2.09

Table 507 - ISED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106 SP	Duty Cycle (%):	98.8
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	7.52
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6435 (RU106.53)	3.87	4.18	-	-	7.04	7.52	14.56	17.00	-2.44
6475 (RU106.53)	3.83	4.27	-	-	7.07	7.52	14.58	17.00	-2.42
6515 (RU106.54)	4.41	4.34	-	-	7.39	7.52	14.90	17.00	-2.10

Table 508 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26 SP	Duty Cycle (%):	97.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.11
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6535 (RU26.0)	3.10	3.79	-	-	6.47	8.21	14.68	17.00	-2.32
6695 (RU26.0)	3.03	3.62	-	-	6.34	8.21	14.55	17.00	-2.45
6855 (RU26.8)	3.79	3.74	-	-	6.77	8.21	14.98	17.00	-2.02

Table 509 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52 SP	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.11
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6535 (RU52.37)	3.41	4.06	-	-	6.76	8.21	14.97	17.00	-2.03
6695 (RU52.37)	3.62	3.48	-	-	6.56	8.21	14.77	17.00	-2.23
6855 (RU52.40)	3.37	4.15	-	-	6.79	8.21	15.00	17.00	-2.00

Table 510 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106 SP	Duty Cycle (%):	98.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.07
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6535 (RU106.53)	3.77	3.89	-	-	6.84	8.21	15.04	17.00	-1.96
6695 (RU106.53)	3.62	3.74	-	-	6.69	8.21	14.89	17.00	-2.11
6855 (RU106.54)	3.45	3.95	-	-	6.72	8.21	14.93	17.00	-2.07

Table 511 - Maximum Power Spectral Density Results



MIMO SDM

Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(9)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU VLP	Duty Cycle (%):	92.5
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.34
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.69
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6125	-17.28	-15.73	-	-	-13.42	4.69	-8.73	-5.00	-3.73
6245	-16.90	-15.64	-	-	-13.21	4.69	-8.52	-5.00	-3.52
6405	-15.63	-15.33	-	-	-12.47	4.63	-7.83	-5.00	-2.83

Table 512 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(9)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU VLP	Duty Cycle (%):	85.6
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.68
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.29
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6565	-15.77	-15.75	-	-	-12.75	5.29	-7.46	-5.00	-2.46
6725	-15.80	-15.91	-	-	-12.84	5.29	-7.55	-5.00	-2.55
6845	-15.55	-15.73	-	-	-12.63	5.29	-7.34	-5.00	-2.34

Table 513 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(9)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU VLP	Duty Cycle (%):	96.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.14
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.69
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6145	-16.21	-14.99	-	-	-12.55	4.69	-7.85	-5.00	-2.85
6225	-17.07	-15.20	-	-	-13.02	4.69	-8.33	-5.00	-3.33
6385	-15.99	-15.22	-	-	-12.58	4.63	-7.94	-5.00	-2.94

Table 514 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(9)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU VLP	Duty Cycle (%):	93.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.27
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.29
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6625	-16.59	-15.86	-	-	-13.20	5.29	-7.91	-5.00	-2.91
6705	-15.74	-15.74	-	-	-12.73	5.29	-7.44	-5.00	-2.44
6785	-15.90	-15.90	-	-	-12.89	5.29	-7.60	-5.00	-2.60

Table 515 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(9)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU VLP	Duty Cycle (%):	95.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.22
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.69
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6185	-14.98	-14.89	-	-	-11.92	4.69	-7.23	-5.00	-2.23
6345	-15.02	-14.73	-	-	-11.87	4.63	-7.23	-5.00	-2.23

Table 516 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(9)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU VLP	Duty Cycle (%):	92.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.36
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.29
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6665	-15.47	-15.33	-	-	-12.39	5.29	-7.10	-5.00	-2.10

Table 517 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	97.6
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.11
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.69
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5955	-11.66	-11.16	-	-	-8.39	4.31	-4.08	-1.00	-3.08
6175	-12.12	-11.27	-	-	-8.67	4.69	-3.98	-1.00	-2.98
6415	-11.21	-11.02	-	-	-8.10	4.63	-3.47	-1.00	-2.47

Table 518 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	96.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.15
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.69
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5965	-10.79	-10.52	-	-	-7.64	4.31	-3.33	-1.00	-2.33
6165	-13.25	-11.70	-	-	-9.39	4.69	-4.70	-1.00	-3.70
6405	-10.74	-10.86	-	-	-7.79	4.63	-3.16	-1.00	-2.16

Table 519 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	96.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.15
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.69
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5985	-10.70	-10.70	-	-	-7.69	4.31	-3.38	-1.00	-2.38
6145	-11.19	-10.88	-	-	-8.02	4.69	-3.33	-1.00	-2.33
6385	-10.66	-10.77	-	-	-7.70	4.63	-3.07	-1.00	-2.07

Table 520 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	96.6
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.15
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.69
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6025	-10.27	-10.15	-	-	-7.20	4.31	-2.89	-1.00	-1.89
6185	-10.54	-10.12	-	-	-7.31	4.69	-2.62	-1.00	-1.62
6345	-10.51	-10.56	-	-	-7.52	4.63	-2.89	-1.00	-1.89

Table 521 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	95.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.18
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.66
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6435	-11.42	-11.41	-	-	-8.41	4.66	-3.75	-1.00	-2.75
6475	-11.00	-11.44	-	-	-8.20	4.66	-3.55	-1.00	-2.55
6515	-10.50	-10.70	-	-	-7.59	4.66	-2.93	-1.00	-1.93

Table 522 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	95.5
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.20
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.66
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6445	-11.08	-10.79	-	-	-7.92	4.66	-3.27	-1.00	-2.27
6485	-11.16	-11.23	-	-	-8.19	4.66	-3.53	-1.00	-2.53
6525	-11.99	-11.89	-	-	-8.93	4.66	-4.27	-1.00	-3.27

Table 523 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	96.5
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.15
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.66
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6465	-11.15	-10.96	-	-	-8.05	4.66	-3.39	-1.00	-2.39

Table 524 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	94.5
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.25
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.66
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6505	-11.48	-10.92	-	-	-8.18	4.66	-3.53	-1.00	-2.53

Table 525 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	94.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.23
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.29
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6535	-11.67	-11.63	-	-	-8.64	5.29	-3.35	-1.00	-2.35
6695	-12.00	-11.91	-	-	-8.95	5.29	-3.65	-1.00	-2.65
6855	-11.61	-11.98	-	-	-8.78	5.29	-3.49	-1.00	-2.49
6875	-11.71	-12.11	-	-	-8.90	5.29	-3.60	-1.00	-2.60

Table 526 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	93.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.30
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.29
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6565	-11.92	-11.60	-	-	-8.75	5.29	-3.46	-1.00	-2.46
6685	-12.06	-12.02	-	-	-9.03	5.29	-3.74	-1.00	-2.74
6845	-11.79	-11.80	-	-	-8.79	5.29	-3.49	-1.00	-2.49

Table 527 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	94.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.27
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.29
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6545	-11.15	-11.10	-	-	-8.12	5.29	-2.83	-1.00	-1.83
6625	-11.58	-11.62	-	-	-8.59	5.29	-3.30	-1.00	-2.30
6705	-10.99	-11.09	-	-	-8.03	5.29	-2.74	-1.00	-1.74
6785	-11.24	-11.35	-	-	-8.28	5.29	-2.99	-1.00	-1.99
6865	-11.09	-11.12	-	-	-8.10	5.29	-2.80	-1.00	-1.80

Table 528 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	91.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.40
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.29
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6665	-11.19	-10.48	-	-	-7.81	5.29	-2.51	-1.00	-1.51
6825	-10.48	-10.57	-	-	-7.51	5.29	-2.22	-1.00	-1.22

Table 529 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	95.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.22
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	2.92
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6895	-9.02	-9.46	-	-	-6.23	2.92	-3.30	-1.00	-2.30
6995	-9.28	-9.77	-	-	-6.51	2.92	-3.59	-1.00	-2.59
7095	-9.55	-9.53	-	-	-6.53	2.92	-3.61	-1.00	-2.61

Table 530 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	93.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.29
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.29
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6885	-12.11	-12.23	-	-	-9.16	5.29	-3.87	-1.00	-2.87
6925	-9.31	-9.03	-	-	-6.16	2.92	-3.23	-1.00	-2.23
7005	-9.29	-9.01	-	-	-6.14	2.92	-3.22	-1.00	-2.22
7085	-9.20	-9.23	-	-	-6.20	2.92	-3.28	-1.00	-2.28

Table 531 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	94.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.24
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	2.92
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6945	-9.04	-8.68	-	-	-5.85	2.92	-2.93	-1.00	-1.93
7025	-9.25	-8.76	-	-	-5.99	2.92	-3.07	-1.00	-2.07

Table 532 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	92.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.36
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	2.92
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6985	-8.51	-8.50	-	-	-5.50	2.92	-2.58	-1.00	-1.58

Table 533 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26 LPI	Duty Cycle (%):	97.8
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.10
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.29
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5955 (RU26.0)	-11.22	-10.66	-	-	-7.92	4.31	-3.61	-1.00	-2.61
6175 (RU26.0)	-12.20	-11.45	-	-	-8.80	4.69	-4.10	-1.00	-3.10
6415 (RU26.8)	-11.27	-11.08	-	-	-8.17	4.63	-3.53	-1.00	-2.53
6435 (RU26.0)	-11.57	-10.67	-	-	-8.09	4.66	-3.43	-1.00	-2.43
6475 (RU26.0)	-11.05	-11.21	-	-	-8.12	4.66	-3.47	-1.00	-2.47
6515 (RU26.8)	-11.09	-11.19	-	-	-8.13	4.66	-3.48	-1.00	-2.48
6535 (RU26.0)	-11.26	-11.28	-	-	-8.26	5.29	-2.97	-1.00	-1.97
6695 (RU26.0)	-11.83	-11.16	-	-	-8.47	5.29	-3.18	-1.00	-2.18
6855 (RU26.8)	-11.55	-11.92	-	-	-8.72	5.29	-3.43	-1.00	-2.43
6875 (RU26.3)	-11.63	-12.20	-	-	-8.90	5.29	-3.60	-1.00	-2.60
6875 (RU26.5)	-11.48	-11.99	-	-	-8.72	5.29	-3.43	-1.00	-2.43
6895 (RU26.0)	-9.04	-9.16	-	-	-6.09	2.92	-3.17	-1.00	-2.17
6995 (RU26.0)	-9.46	-9.64	-	-	-6.54	2.92	-3.62	-1.00	-2.62
7095 (RU26.8)	-9.25	-9.27	-	-	-6.25	2.92	-3.33	-1.00	-2.33

Table 534 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52 LPI	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.29
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5955 (RU52.37)	-10.84	-10.00	-	-	-7.39	4.31	-3.08	-1.00	-2.08
6175 (RU52.37)	-11.95	-11.38	-	-	-8.65	4.69	-3.95	-1.00	-2.95
6415 (RU52.40)	-10.88	-10.52	-	-	-7.69	4.63	-3.06	-1.00	-2.06
6435 (RU52.37)	-10.88	-10.49	-	-	-7.67	4.66	-3.02	-1.00	-2.02
6475 (RU52.37)	-10.67	-10.69	-	-	-7.67	4.66	-3.01	-1.00	-2.01
6515 (RU52.40)	-10.82	-10.51	-	-	-7.65	4.66	-3.00	-1.00	-2.00
6535 (RU52.37)	-11.43	-10.91	-	-	-8.15	5.29	-2.86	-1.00	-1.86
6695 (RU52.37)	-11.91	-11.12	-	-	-8.48	5.29	-3.19	-1.00	-2.19
6855 (RU52.40)	-11.65	-11.42	-	-	-8.52	5.29	-3.23	-1.00	-2.23
6875 (RU52.38)	-11.42	-11.34	-	-	-8.37	5.29	-3.08	-1.00	-2.08
6875 (RU52.39)	-11.23	-11.34	-	-	-8.28	5.29	-2.99	-1.00	-1.99
6895 (RU52.37)	-9.05	-8.96	-	-	-5.99	2.92	-3.07	-1.00	-2.07
6995 (RU52.37)	-9.12	-9.22	-	-	-6.16	2.92	-3.24	-1.00	-2.24
7095 (RU52.40)	-8.68	-8.76	-	-	-5.71	2.92	-2.79	-1.00	-1.79

Table 535 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106 LPI	Duty Cycle (%):	97.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.09
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.29
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5955 (RU106.53)	-11.07	-10.20	-	-	-7.60	4.31	-3.29	-1.00	-2.29
6175 (RU106.53)	-11.59	-11.09	-	-	-8.32	4.69	-3.63	-1.00	-2.63
6415 (RU106.54)	-10.60	-10.14	-	-	-7.35	4.63	-2.72	-1.00	-1.72
6435 (RU106.53)	-10.77	-10.34	-	-	-7.54	4.66	-2.88	-1.00	-1.88
6475 (RU106.53)	-10.75	-10.63	-	-	-7.68	4.66	-3.03	-1.00	-2.03
6515 (RU106.54)	-10.39	-10.38	-	-	-7.37	4.66	-2.72	-1.00	-1.72
6535 (RU106.53)	-11.03	-10.79	-	-	-7.90	5.29	-2.61	-1.00	-1.61
6695 (RU106.53)	-11.41	-11.51	-	-	-8.45	5.29	-3.16	-1.00	-2.16
6855 (RU106.54)	-11.07	-11.32	-	-	-8.18	5.29	-2.89	-1.00	-1.89
6875 (RU106.53)	-11.26	-11.40	-	-	-8.32	5.29	-3.03	-1.00	-2.03
6895 (RU106.53)	-8.41	-8.89	-	-	-5.63	2.92	-2.71	-1.00	-1.71
6995 (RU106.53)	-9.10	-9.03	-	-	-6.05	2.92	-3.13	-1.00	-2.13
7095 (RU106.54)	-9.01	-8.79	-	-	-5.89	2.92	-2.96	-1.00	-1.96

Table 536 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	96.5
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.15
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.69
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5955	6.74	6.93	-	-	9.85	4.31	14.16	17.00	-2.84
6175	5.84	6.31	-	-	9.09	4.69	13.79	17.00	-3.21
6415	7.11	7.17	-	-	10.15	4.63	14.79	17.00	-2.21

Table 537 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.69
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5965	5.03	5.35	-	-	8.20	4.31	12.52	17.00	-4.48
6165	5.66	5.73	-	-	8.70	4.69	13.40	17.00	-3.60
6405	6.71	6.74	-	-	9.73	4.63	14.37	17.00	-2.63

Table 538 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	97.6
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.10
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.69
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5985	2.56	2.25	-	-	5.42	4.31	9.73	17.00	-7.27
6145	3.39	3.30	-	-	6.35	4.69	11.05	17.00	-5.95
6385	3.90	3.59	-	-	6.76	4.63	11.39	17.00	-5.61

Table 539 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU SP	Duty Cycle (%):	95.6
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.19
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.69
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6025	-0.92	-0.74	-	-	2.18	4.31	6.50	17.00	-10.50
6185	-0.20	-0.26	-	-	2.78	4.69	7.47	17.00	-9.53
6345	-0.44	-0.82	-	-	2.38	4.63	7.02	17.00	-9.98

Table 540 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	95.5
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.20
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.66
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6435	6.75	6.93	-	-	9.85	4.66	14.51	17.00	-2.49
6475	6.42	6.84	-	-	9.65	4.66	14.30	17.00	-2.70
6515	7.33	7.36	-	-	10.35	4.66	15.01	17.00	-1.99

Table 541 - ISED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	95.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.18
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.66
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6445	6.65	6.38	-	-	9.53	4.66	14.18	17.00	-2.82
6485	6.27	6.57	-	-	9.43	4.66	14.09	17.00	-2.91
6525	6.68	6.75	-	-	9.73	4.66	14.38	17.00	-2.62

Table 542 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	96.5
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.15
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.66
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6465	3.49	3.54	-	-	6.52	4.66	11.18	17.00	-5.82
6545	4.34	4.10	-	-	7.23	5.29	12.52	17.00	-4.48

Table 543 - ISED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU SP	Duty Cycle (%):	95.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.21
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.66
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6505	-1.19	-0.94	-	-	1.95	4.66	6.60	17.00	-10.40

Table 544 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	94.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.23
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.29
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6535	6.21	6.30	-	-	9.26	5.29	14.56	17.00	-2.44
6695	6.20	6.33	-	-	9.28	5.29	14.57	17.00	-2.43
6855	5.93	6.05	-	-	9.00	5.29	14.29	17.00	-2.71

Table 545 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	94.6
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.24
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.29
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6565	6.05	6.08	-	-	9.07	5.29	14.37	17.00	-2.63
6685	5.84	5.83	-	-	8.84	5.29	14.13	17.00	-2.87
6845	5.66	5.54	-	-	8.61	5.29	13.90	17.00	-3.10

Table 546 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	94.5
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.24
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.29
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6625	3.11	2.88	-	-	6.01	5.29	11.30	17.00	-5.70
6705	3.14	2.96	-	-	6.06	5.29	11.35	17.00	-5.65
6785	3.38	3.20	-	-	6.30	5.29	11.59	17.00	-5.41

Table 547 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU SP	Duty Cycle (%):	91.8
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.37
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.29
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6665	-0.79	-0.52	-	-	2.36	5.29	7.65	17.00	-9.35

Table 548 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26 SP	Duty Cycle (%):	98.5
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.07
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.69
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5955 (RU26.0)	6.85	7.40	-	-	10.14	4.31	14.45	17.00	-2.55
6175 (RU26.0)	5.86	5.98	-	-	8.93	4.69	13.62	17.00	-3.38
6415 (RU26.8)	6.81	6.53	-	-	9.68	4.63	14.32	17.00	-2.68

Table 549 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52 SP	Duty Cycle (%):	98.5
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.06
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.69
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5955 (RU52.37)	6.90	7.44	-	-	10.19	4.31	14.50	17.00	-2.50
6175 (RU52.37)	6.10	6.47	-	-	9.30	4.69	13.99	17.00	-3.01
6415 (RU52.40)	6.89	7.37	-	-	10.15	4.63	14.78	17.00	-2.22

Table 550 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106 SP	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.69
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5955 (RU106.53)	7.95	7.79	-	-	10.88	4.31	15.19	17.00	-1.81
6175 (RU106.53)	6.40	6.56	-	-	9.49	4.69	14.18	17.00	-2.82
6415 (RU106.54)	7.52	7.34	-	-	10.44	4.63	15.07	17.00	-1.93

Table 551 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26 SP	Duty Cycle (%):	98.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.08
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.66
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6435 (RU26.0)	6.47	6.69	-	-	9.59	4.66	14.25	17.00	-2.75
6475 (RU26.0)	6.49	6.73	-	-	9.63	4.66	14.28	17.00	-2.72
6515 (RU26.8)	6.71	7.09	-	-	9.91	4.66	14.57	17.00	-2.43

Table 552 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52 SP	Duty Cycle (%):	97.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.13
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.66
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6435 (RU52.37)	6.95	7.68	-	-	10.34	4.66	15.00	17.00	-2.00
6475 (RU52.37)	6.47	7.18	-	-	9.85	4.66	14.51	17.00	-2.49
6515 (RU52.40)	7.19	7.68	-	-	10.46	4.66	15.11	17.00	-1.89

Table 553 - ISED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106 SP	Duty Cycle (%):	98.6
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.06
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.66
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6435 (RU106.53)	7.30	7.26	-	-	10.29	4.66	14.94	17.00	-2.06
6475 (RU106.53)	7.07	7.42	-	-	10.26	4.66	14.92	17.00	-2.08
6515 (RU106.54)	7.20	7.72	-	-	10.48	4.66	15.14	17.00	-1.86

Table 554 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26 SP	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.11
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.29
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6535 (RU26.0)	5.95	6.12	-	-	9.05	5.29	14.34	17.00	-2.66
6695 (RU26.0)	6.19	6.24	-	-	9.22	5.29	14.52	17.00	-2.48
6855 (RU26.8)	6.25	6.37	-	-	9.32	5.29	14.61	17.00	-2.39

Table 555 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52 SP	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.11
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.29
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6535 (RU52.37)	6.13	6.70	-	-	9.43	5.29	14.72	17.00	-2.28
6695 (RU52.37)	6.21	6.76	-	-	9.50	5.29	14.79	17.00	-2.21
6855 (RU52.40)	6.05	6.96	-	-	9.54	5.29	14.83	17.00	-2.17

Table 556 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106 SP	Duty Cycle (%):	98.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.07
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.29
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6535 (RU106.53)	6.56	6.86	-	-	9.72	5.29	15.01	17.00	-1.99
6695 (RU106.53)	6.59	6.96	-	-	9.79	5.29	15.08	17.00	-1.92
6855 (RU106.54)	6.31	6.63	-	-	9.48	5.29	14.78	17.00	-2.22

Table 557 - Maximum Power Spectral Density Results



TxBF

Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(8) RSS-248	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	93.6
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.29
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	7.66
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5985	-13.37	-13.48	-	-	-10.41	7.27	-3.14	-1.00	-2.14
6145	-14.31	-14.08	-	-	-11.18	7.66	-3.52	-1.00	-2.52
6385	-12.88	-13.57	-	-	-10.20	7.46	-2.74	-1.00	-1.74

Table 558 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407(a)(8) RSS-248	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	94.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.25
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	7.52
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6465	-13.90	-13.69	-	-	-10.78	7.52	-3.26	-1.00	-2.26

Table 559 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(8) RSS-248	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	91.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.40
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6545	-14.71	-14.29	-	-	-11.48	8.21	-3.27	-1.00	-2.27
6625	-14.96	-14.86	-	-	-11.89	8.21	-3.68	-1.00	-2.68
6705	-14.49	-14.26	-	-	-11.36	8.21	-3.15	-1.00	-2.15
6785	-14.98	-16.78	-	-	-12.77	8.21	-4.56	-1.00	-3.56
6865	-14.47	-16.54	-	-	-12.37	8.21	-4.16	-1.00	-3.16

Table 560 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8
Limit Clause(s):	15.407(a)(8) RSS-248	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	93.6
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.29
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	5.82
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6925	-12.77	-14.38	-	-	-10.49	5.82	-4.67	-1.00	-3.67
7005	-12.47	-14.19	-	-	-10.24	5.82	-4.42	-1.00	-3.42
7085	-12.46	-14.39	-	-	-10.31	5.82	-4.49	-1.00	-3.49

Table 561 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8
Limit Clause(s):	15.407(a)(8) RSS-248	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	94.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.27
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	5.82
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6945	-12.02	-12.04	-	-	-9.02	5.82	-3.20	-1.00	-2.20
7025	-12.12	-11.95	-	-	-9.02	5.82	-3.20	-1.00	-2.20

Table 562 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(7) RSS-248	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	94.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.27
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	7.66
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5955	4.06	4.40	-	-	7.24	7.27	14.51	17.00	-2.49
6175	2.57	2.95	-	-	5.77	7.66	13.43	17.00	-3.57
6415	4.54	4.06	-	-	7.31	7.46	14.77	17.00	-2.23

Table 563 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(7) RSS-248	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	93.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.30
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	7.66
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5965	3.52	3.80	-	-	6.67	7.27	13.94	17.00	-3.06
6165	2.67	2.50	-	-	5.59	7.66	13.25	17.00	-3.75
6405	3.93	3.71	-	-	6.83	7.46	14.29	17.00	-2.71

Table 564 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(7) RSS-248	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	93.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.30
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	7.66
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5985	0.99	1.03	-	-	4.02	7.27	11.29	17.00	-5.71
6145	0.62	0.49	-	-	3.57	7.66	11.22	17.00	-5.78
6385	1.19	0.76	-	-	3.99	7.46	11.45	17.00	-5.55

Table 565 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407(a)(7) RSS-248	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	94.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.26
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	7.52
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6435	3.56	3.38	-	-	6.48	7.52	14.00	17.00	-3.00
6475	3.56	3.49	-	-	6.53	7.52	14.05	17.00	-2.95
6515	3.71	3.69	-	-	6.71	7.52	14.23	17.00	-2.77

Table 566 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407(a)(7) RSS-248	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	91.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.41
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	7.52
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6445	3.43	3.60	-	-	6.53	7.52	14.04	17.00	-2.96
6485	3.07	3.20	-	-	6.15	7.52	13.66	17.00	-3.34
6525	2.96	3.03	-	-	6.00	7.52	13.52	17.00	-3.48

Table 567 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407(a)(7) RSS-248	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	87.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.59
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6465	0.65	0.37	-	-	3.52	7.52	11.04	17.00	-5.96
6545	0.29	0.38	-	-	3.34	8.21	11.55	17.00	-5.45

Table 568 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(7) RSS-248	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	93.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.27
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6535	3.33	3.13	-	-	6.24	8.21	14.44	17.00	-2.56
6695	3.11	2.93	-	-	6.03	8.21	14.24	17.00	-2.76
6855	3.07	2.87	-	-	5.98	8.21	14.19	17.00	-2.81

Table 569 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(7) RSS-248	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	91.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.41
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6565	2.95	3.31	-	-	6.14	8.21	14.35	17.00	-2.65
6685	2.94	3.11	-	-	6.03	8.21	14.24	17.00	-2.76
6845	2.88	2.86	-	-	5.88	8.21	14.09	17.00	-2.91

Table 570 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(a)(7) RSS-248	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	92.6
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.33
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6625	-0.10	-0.08	-	-	2.92	8.21	11.13	17.00	-5.87
6705	0.47	-0.02	-	-	3.24	8.21	11.45	17.00	-5.55
6785	0.18	0.16	-	-	3.18	8.21	11.39	17.00	-5.61

Table 571 - Maximum Power Spectral Density Results



FCC 47 CFR Part 15E, Limit Clause 15.407(a)(7)

For client devices, except for fixed client devices as defined in this subpart, operating under the control of a standard power access point in 5.925–6.425 GHz and 6.525–6.875 GHz bands, the maximum power spectral density must not exceed 17 dBm e.i.r.p. in any 1-megahertz band, and the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm and the device must limit its power to no more than 6 dB below its associated standard power access point's authorized transmit power.

FCC 47 CFR Part 15E, Limit Clause 15.407(a)(8)

For client devices operating under the control of an indoor access point in the 5.925-7.125 GHz bands, the maximum power spectral density must not exceed -1 dBm e.i.r.p. in any 1-megahertz band, and the maximum e.i.r.p. over the frequency band of operation must not exceed 24 dBm.

ISED RSS-248, Limit Clause 4.5.3

The following limits shall apply to low-power client devices.

- a) the maximum e.i.r.p. spectral density shall not exceed -1 dBm/MHz; and
- b) the maximum e.i.r.p. over the 5925-7125 MHz frequency band shall not exceed 24 dBm.

ISED RSS-248, Limit Clause 4.5.5

The following limits shall apply to standard client devices:

- a) the maximum e.i.r.p. spectral density shall not exceed 17 dBm/MHz.
- b) the maximum e.i.r.p. over the 5925-6875 MHz frequency band shall not exceed 30 dBm and
- c) the maximum power limits shall remain at least 6 dB below the power levels authorized for the associated standard-power access point.



2.5.7 Test Location and Test Equipment Used

This test was carried out in RF Chamber 18.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Hygrometer	Rotronic	I-1000	3068	12	07-Nov-2024
1800-6000 MHz Power Splitter	Mini-Circuits	ZN2PD-63-S+	4055	-	O/P Mon
Attenuator 5W 30dB DC-18GHz	Aaren	AT40A-4041-D18-30	5505	12	22-Feb-2025
2-Way Power Divider (2-8 GHz)	Aaren	AT30A-TE0208-2-AF	5685	12	02-Jan-2025
Digital Multimeter	Fluke	115	6145	12	06-Jun-2025
MXA Signal Analyser	Keysight Technologies	N9020B	6419	24	28-Feb-2025
Directional Coupler 2-8GHz	RF-Lambda	RFDC2G8G10	6447	-	O/P Mon
Directional Coupler 2-8GHz	RF-Lambda	RFDC2G8G10	6448	-	O/P Mon
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	6517	12	22-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6526	12	22-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6527	12	05-Mar-2025
USB Wideband Power Sensor	Boonton	RTP5008	6585	12	20-Feb-2025
USB Wideband Power Sensor	Boonton	RTP5008	6586	12	20-Feb-2025
AC Programmable Power Supply	iTech	IT7324	6665	-	O/P Mon

Table 572

O/P Mon - Output Monitored using calibrated equipment



2.6 Authorised Band Edges

2.6.1 Specification Reference

FCC 47 CFR Part 15E, Clause 15.407 (b)
ISED RSS-248, Clause 4.6
ISED RSS-GEN, Clause 6.13.

2.6.2 Equipment Under Test and Modification State

A3112, S/N: MNV254CLPF - Modification State 0
A3112, S/N: K67X45QH3Q - Modification State 0

2.6.3 Date of Test

01-June-2024 to 24-June-2024

2.6.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 6.6.

As per KDB 987594, In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.

For U-NII-5-8 channels, the limit line on the following plots equated to -27 dBm/MHz. EIRP and was converted to field strength at 3 m using the following formula:

Field Strength (dBμV/m at 3 m) = EIRP (dBm) + 95.2 dB

Authorised band edge measurements were performed, with the device operating in SISO and MIMO configurations, across the various modes supported by the device.

The measurements displayed within this report, have been limited to those modes which have been shown to be worst case.

Further measurements are held on file by TÜV SÜD and are available if required.

2.6.5 Environmental Conditions

Ambient Temperature	22.5 - 23.0 °C
Relative Humidity	43.5 - 44.5 %



2.6.6 Test Results

6 GHz WLAN

20 MHz Bandwidth - Core 0 (SISO)

Mode	Data Rate/ MCS	Resource Size	Resource Index	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
802.11a	54 Mbps	-	-	5955	5925	75.59	60.61
802.11ax HE20	MCS 4x1	SU	-	5955	5925	78.50	62.58
802.11ax HE20	MCS 11x1	106	54	5955	5925	71.07	49.77
802.11a	54 Mbps	-	-	7095	7125	76.21	63.01
802.11a	54 Mbps	-	-	7115	7125	81.13	65.63
802.11ax HE20	MCS 11x1	SU	-	7095	7125	79.62	63.94
802.11ax HE20	MCS 11x1	106	53	7095	7125	71.48	51.17
802.11ax HE20	MCS 11x1	26	0	7115	7125	83.69	64.01

Table 573 - SISO Authorised Band Edge Results

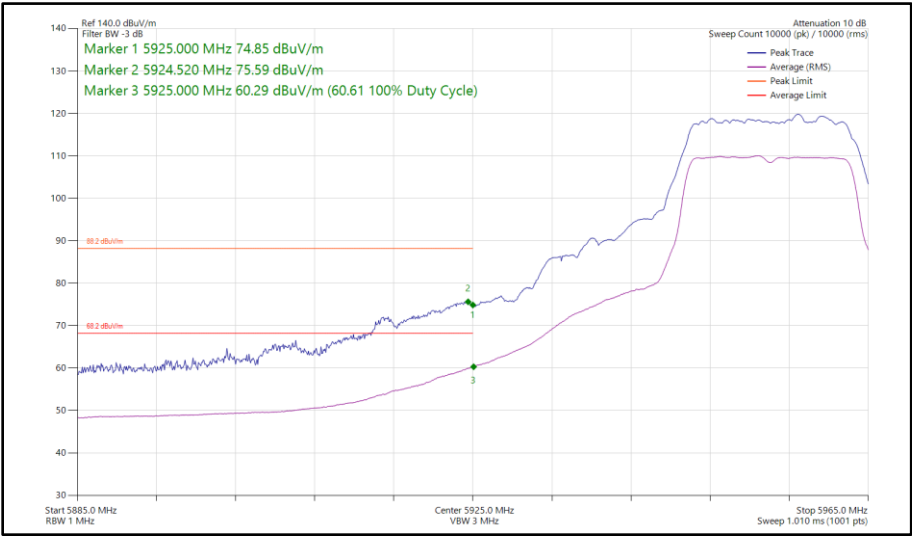


Figure 168 - 802.11a, SISO, Core 0 - 5955 MHz
Band Edge Frequency 5925 MHz

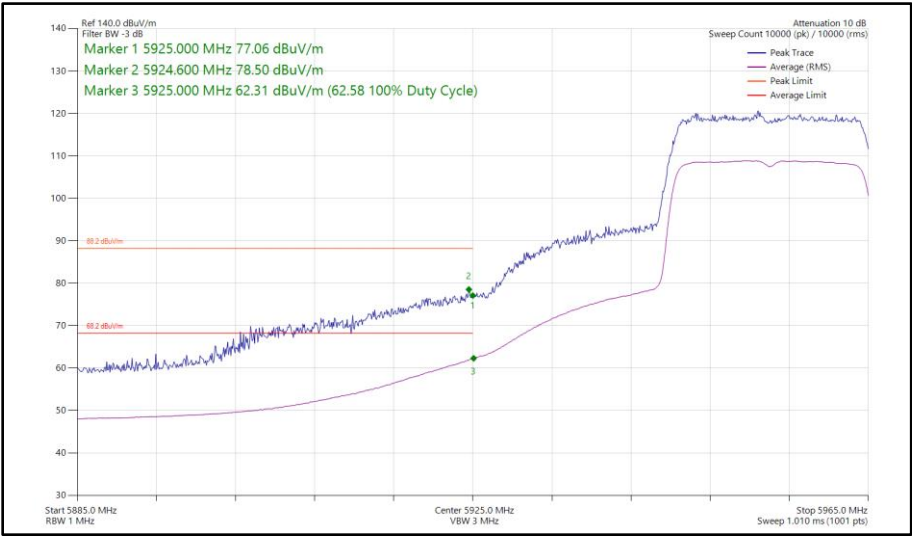


Figure 169 - 802.11ax HE20, SU, SISO, Core 0 - 5955 MHz
Band Edge Frequency 5925 MHz

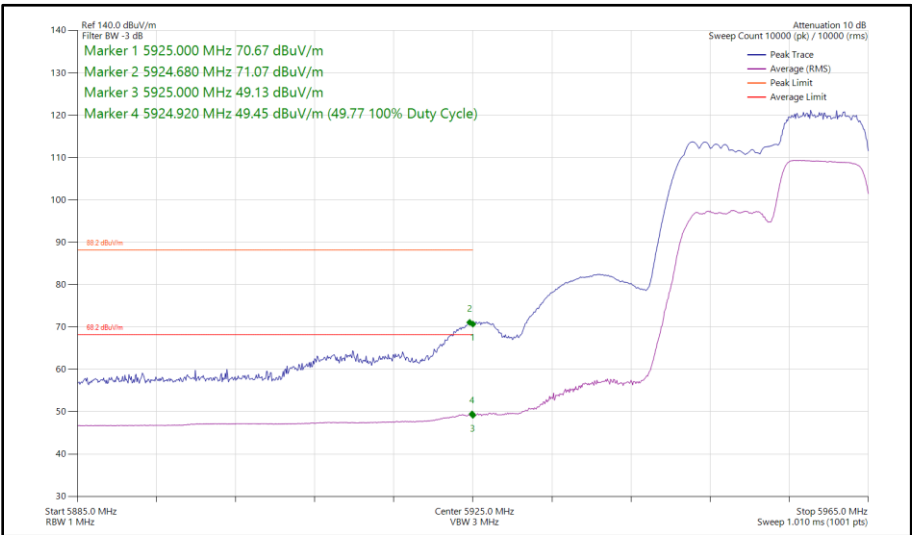


Figure 170 - 802.11ax HE20, RU 106-54, SISO, Core 0 - 5955 MHz
Band Edge Frequency 5925 MHz

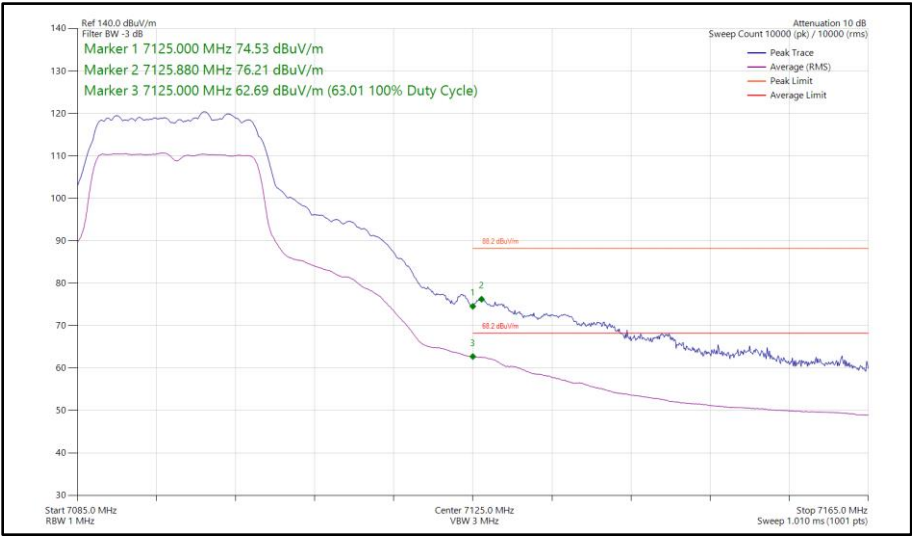


Figure 171 - 802.11a, SISO, Core 0 - 7095 MHz
Band Edge Frequency 7125 MHz

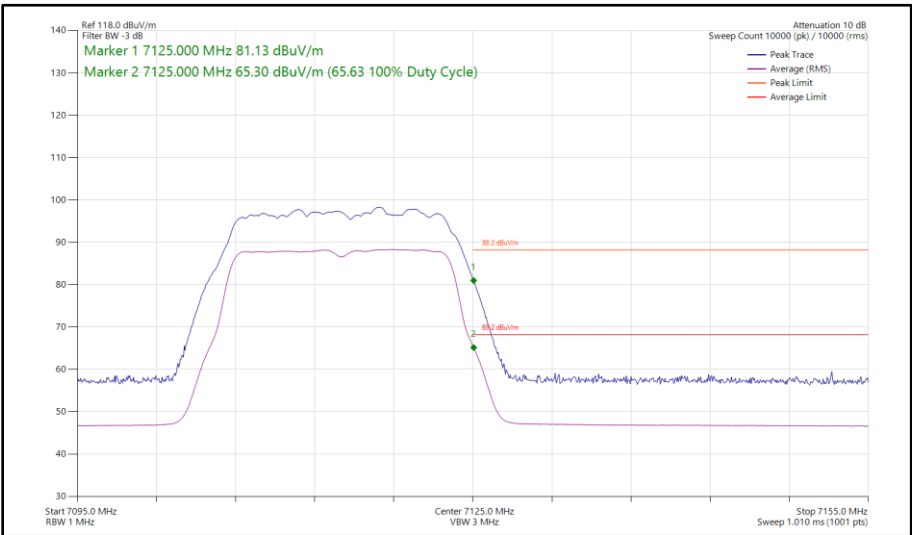
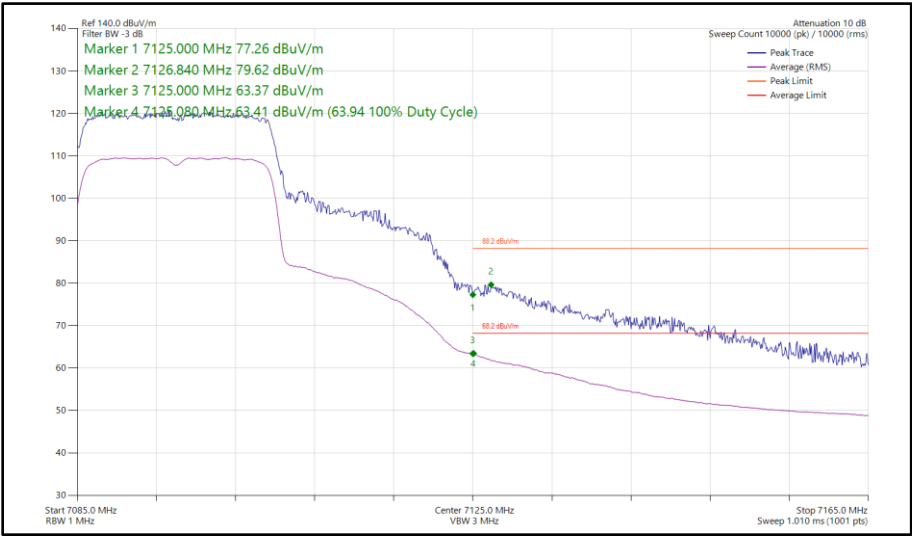
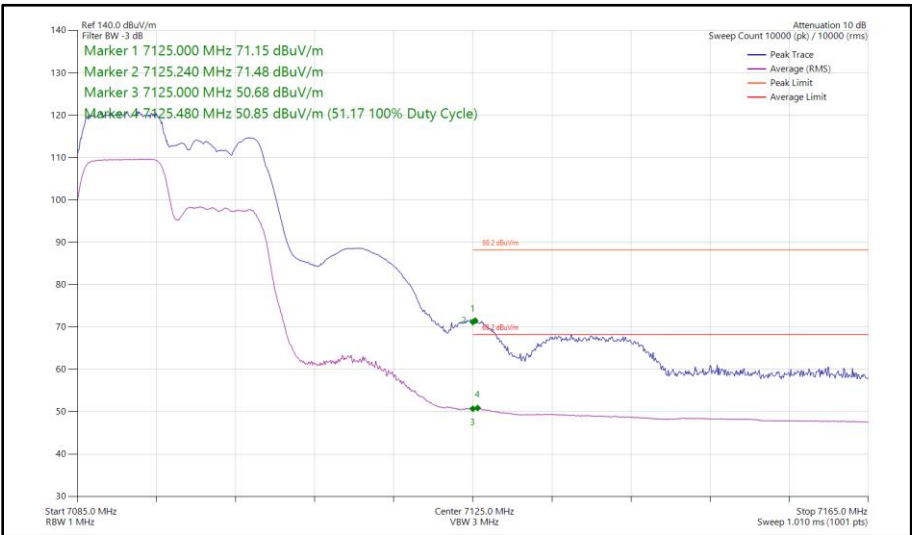


Figure 172 - 802.11a, SISO, Core 0 - 7115 MHz
Band Edge Frequency 7125 MHz



**Figure 173 - 802.11ax HE20, SU, SISO, Core 0 - 7095 MHz
Band Edge Frequency 7125 MHz**



**Figure 174 - 802.11ax HE20, RU 106-53, SISO, Core 0 - 7095 MHz
Band Edge Frequency 7125 MHz**