

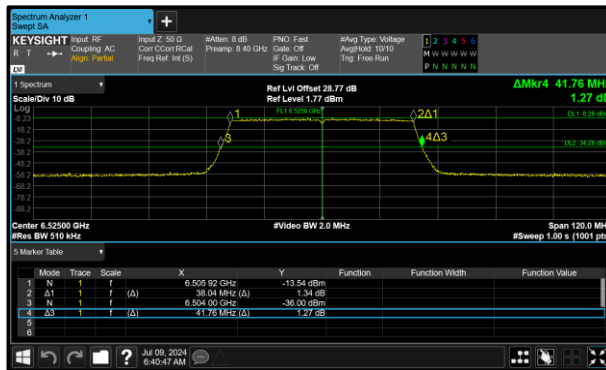


Figure 71 - 802.11ax HE40 SU LPI Minimum 26 dB EBW

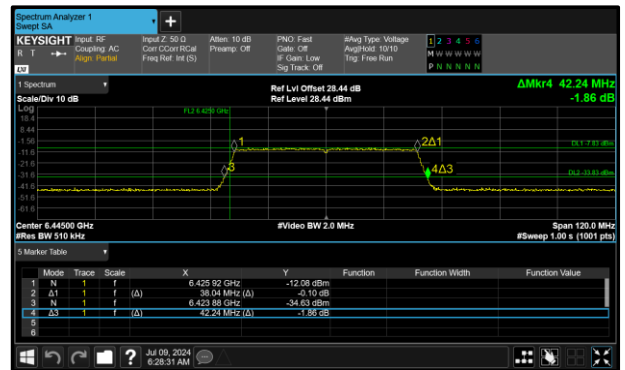


Figure 72 - 802.11ax HE40 SU LPI Maximum 26 dB EBW

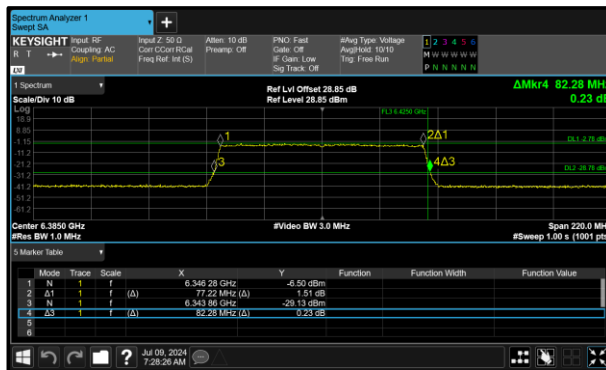


Figure 73 - 802.11ax HE80 SU LPI Minimum 26 dB EBW

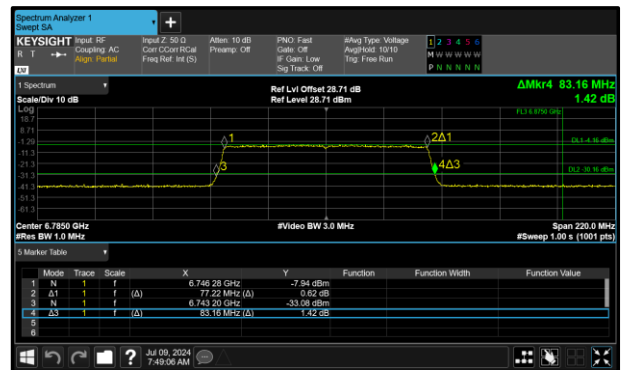


Figure 74 - 802.11ax HE80 SU LPI Maximum 26 dB EBW

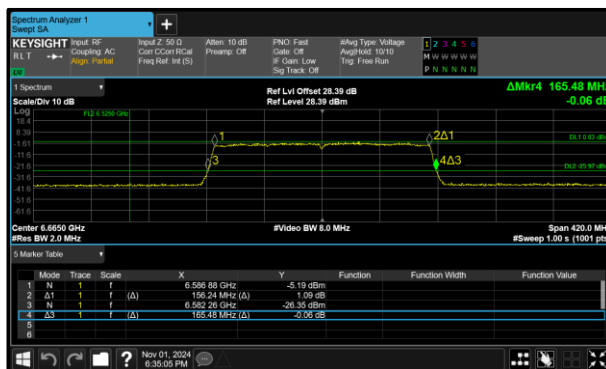


Figure 75 - 802.11ax HE160 SU LPI Minimum 26 dB EBW

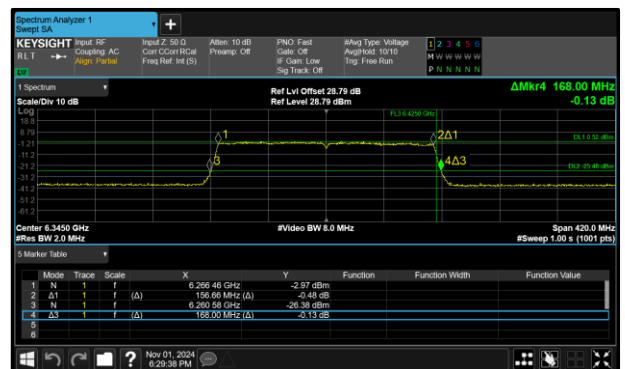


Figure 76 - 802.11ax HE160 SU LPI Maximum 26 dB EBW

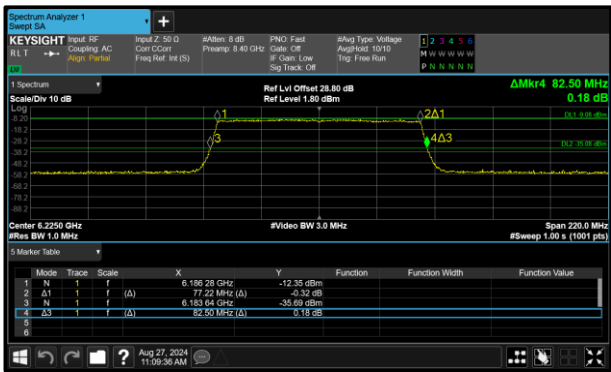


Figure 77 - 802.11ax HE80 SU VLP Minimum 26 dB EBW

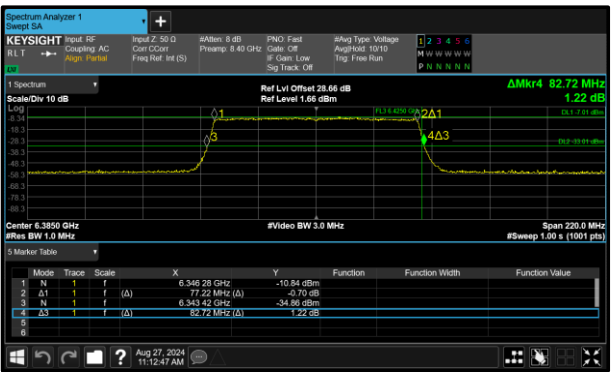


Figure 78 - 802.11ax HE80 SU VLP Maximum 26 dB EBW

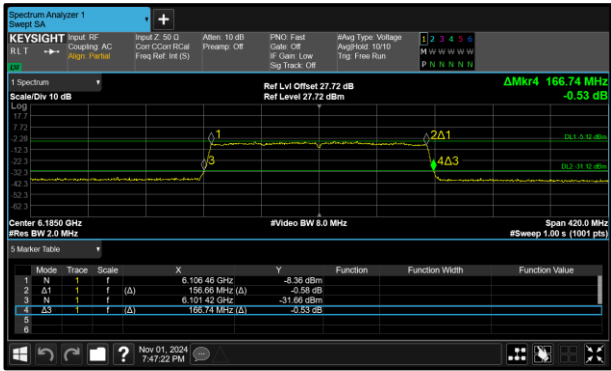


Figure 79 - 802.11ax HE160 SU VLP Minimum 26 dB EBW

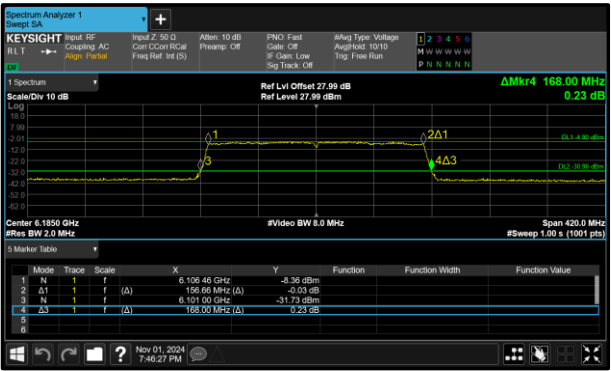


Figure 80 - 802.11ax HE160 SU VLP Maximum 26 dB EBW



Protocol	99% Bandwidth (MHz)	
	Minimum	Maximum
802.11ax HE20 SU SP	19.020	19.020
802.11ax HE40 SU SP	38.040	38.040
802.11ax HE80 SU SP	77.000	77.220
802.11ax HE160 SU SP	156.240	156.660
802.11ax HE20 SU LPI	18.960	19.020
802.11ax HE40 SU LPI	37.920	38.040
802.11ax HE80 SU LPI	77.220	77.440
802.11ax HE160 SU LPI	156.240	156.660

Table 85 - 99% Bandwidth Summary Results - MIMO CDD

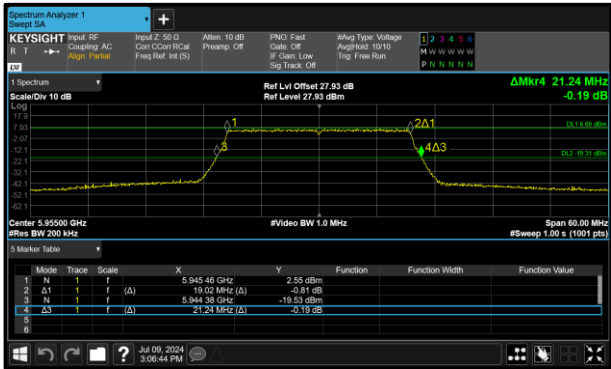


Figure 81 - 802.11ax HE20 SU SP
Minimum 99% OBW

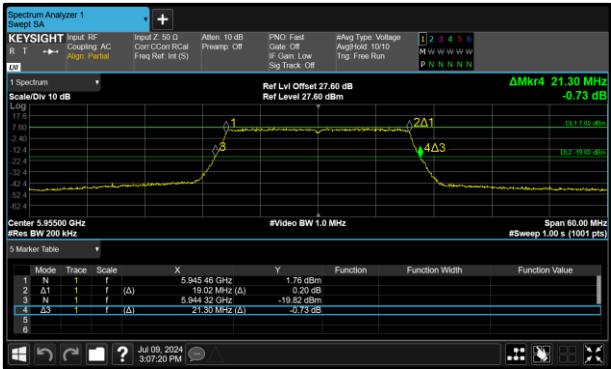


Figure 82 - 802.11ax HE20 SU SP
Maximum 99% OBW

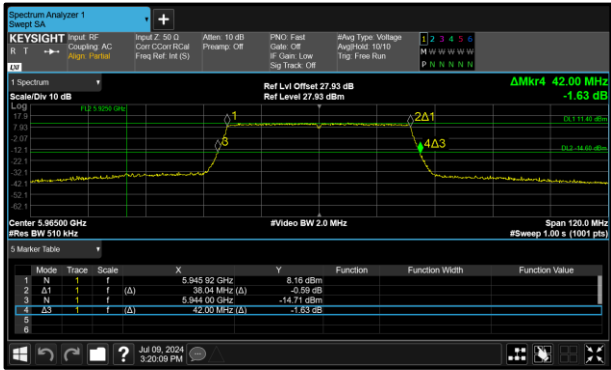


Figure 83 - 802.11ax HE40 SU SP
Minimum 99% OBW

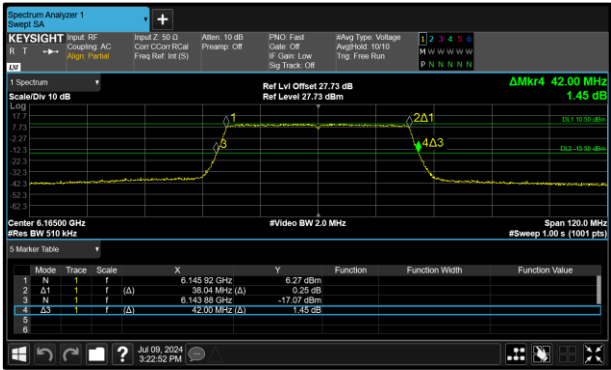


Figure 84 - 802.11ax HE40 SU SP
Maximum 99% OBW

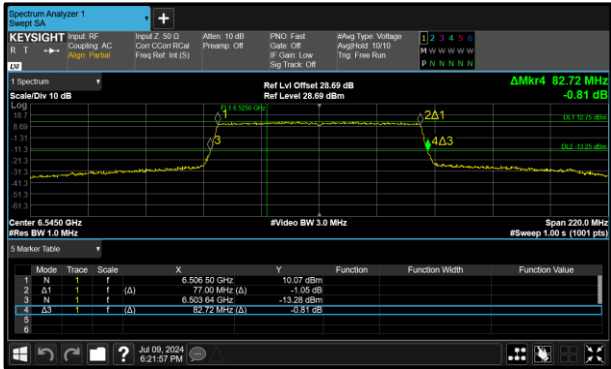


Figure 85 - 802.11ax HE80 SU SP
Minimum 99% OBW

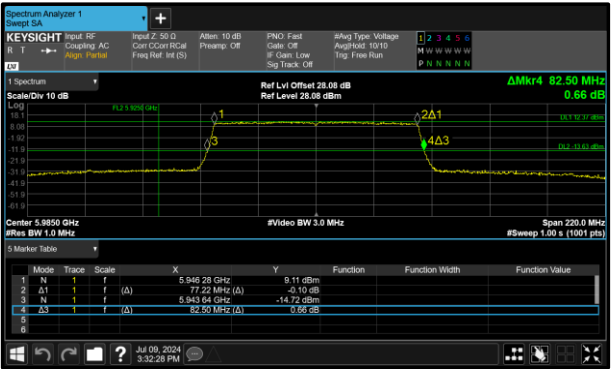


Figure 86 - 802.11ax HE80 SU SP
Maximum 99% OBW

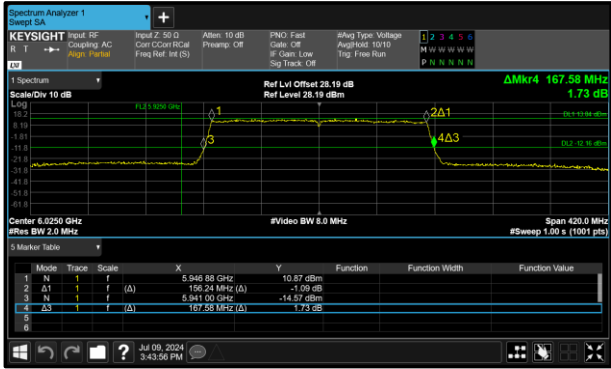


Figure 87 - 802.11ax HE160 SU SP
Minimum 99% OBW

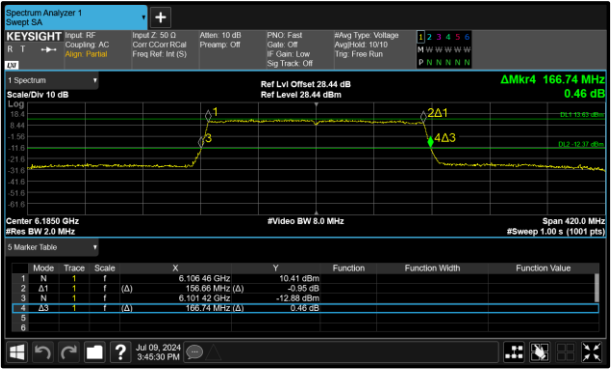


Figure 88 - 802.11ax HE160 SU SP
Maximum 99% OBW

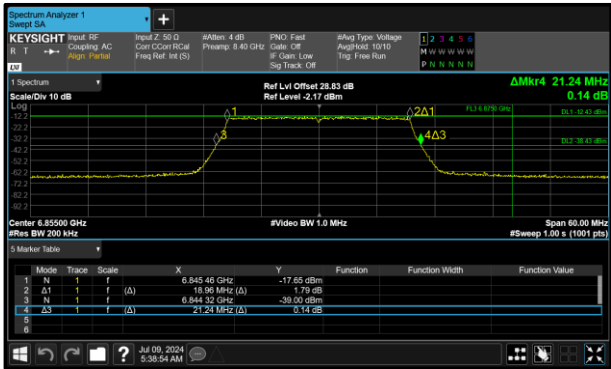


Figure 89 - 802.11ax HE20 SU LPI
Minimum 99% OBW

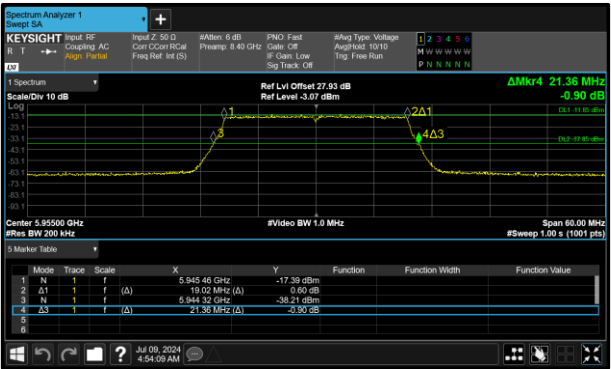


Figure 90 - 802.11ax HE20 SU LPI
Maximum 99% OBW

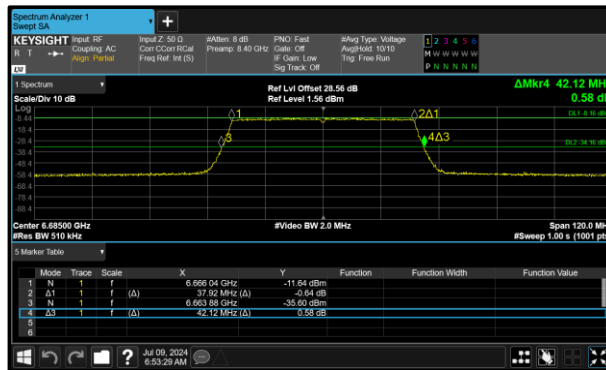


Figure 91 - 802.11ax HE40 SU LPI
Minimum 99% OBW

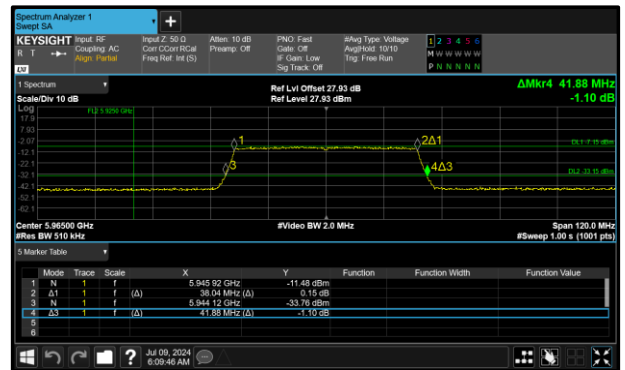


Figure 92 - 802.11ax HE40 SU LPI
Maximum 99% OBW

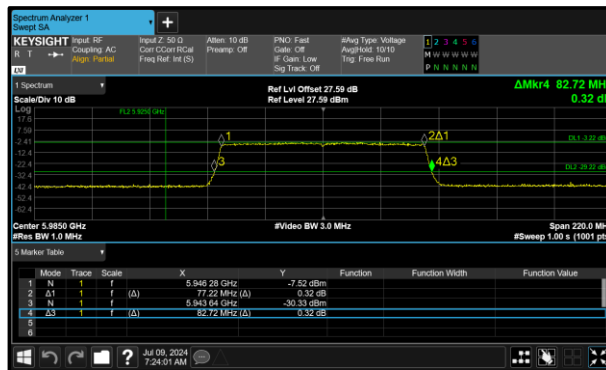


Figure 93 - 802.11ax HE80 SU LPI
Minimum 99% OBW

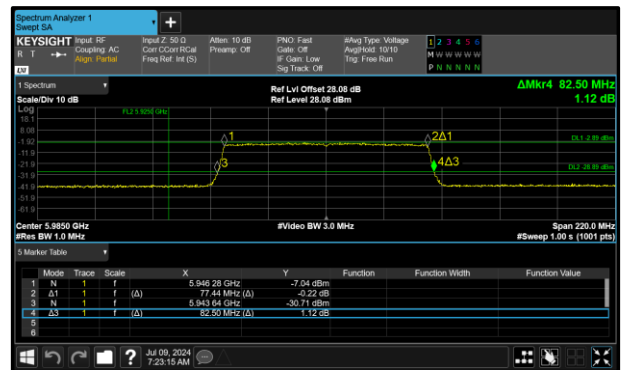


Figure 94 - 802.11ax HE80 SU LPI
Maximum 99% OBW

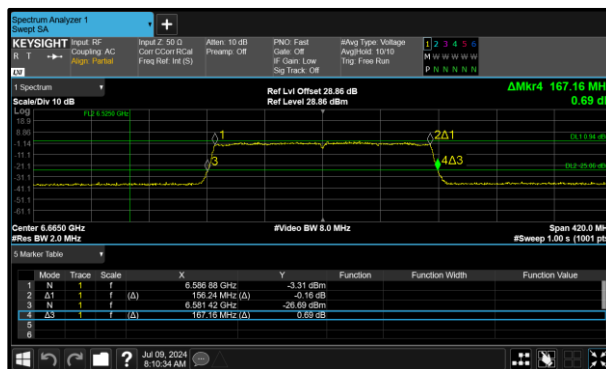


Figure 95 - 802.11ax HE160 SU LPI
Minimum 99% OBW

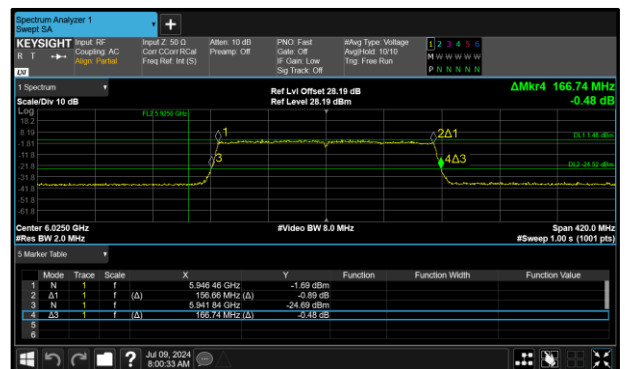


Figure 96 - 802.11ax HE160 SU LPI
Maximum 99% OBW

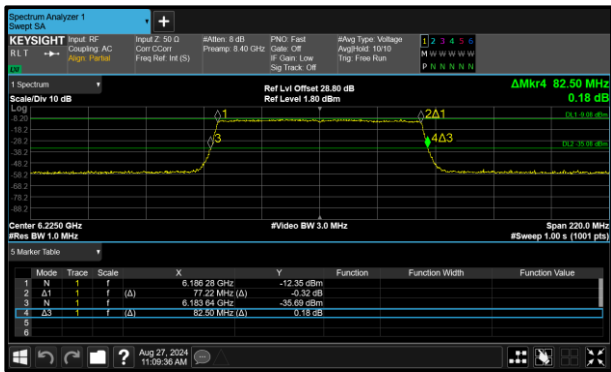


Figure 97 - 802.11ax HE80 SU VLP
Minimum 99% OBW

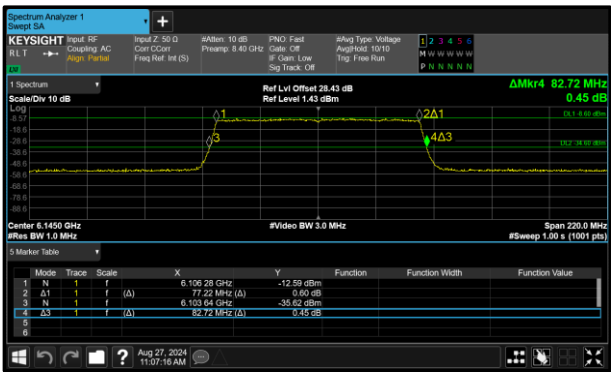


Figure 98 - 802.11ax HE80 SU VLP
Maximum 99% OBW

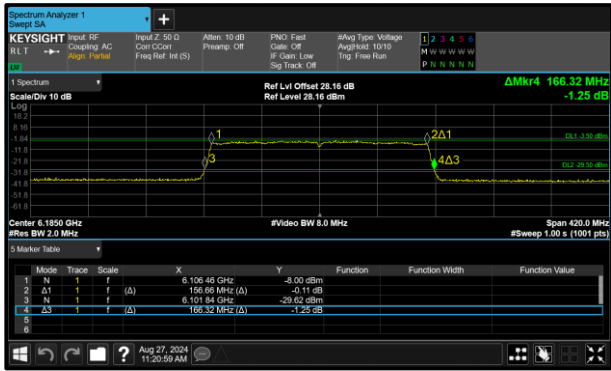


Figure 99 - 802.11ax HE160 SU VLP
Minimum 99% OBW

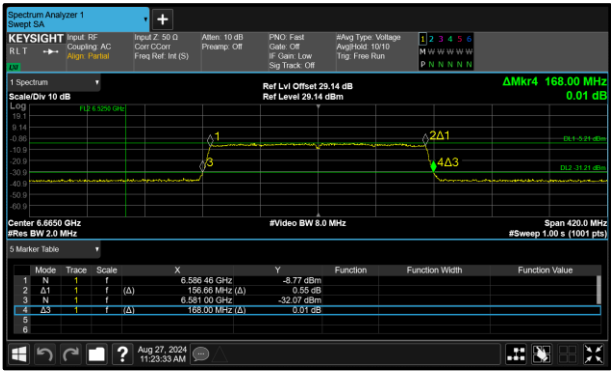


Figure 100 - 802.11ax HE160 SU VLP
Maximum 99% OBW



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407 (a)(11)	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6145	82.720	82.720	-	-	320.000
6225	82.500	82.720	-	-	320.000
6385	82.500	82.720	-	-	320.000
6625	82.720	82.720	-	-	320.000
6705	82.720	82.720	-	-	320.000
6785	82.720	82.500	-	-	320.000

Table 86 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6145	77.220	77.220	-	-	320.000
6225	77.220	77.220	-	-	320.000
6385	77.220	77.220	-	-	320.000
6625	77.220	77.220	-	-	320.000
6705	77.220	77.220	-	-	320.000
6785	77.220	77.220	-	-	320.000

Table 87 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407 (a)(11)	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6185	168.000	166.740	-	-	320.000
6345	167.160	166.740	-	-	320.000
6665	168.000	166.740	-	-	320.000

Table 88 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6185	156.660	156.660	-	-	320.000
6345	156.660	156.660	-	-	320.000
6665	156.660	156.660	-	-	320.000

Table 89 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
5955	21.360	21.360	-	-	320.000
6175	21.420	21.420	-	-	320.000
6415	21.240	21.300	-	-	320.000

Table 90 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
5955	19.020	19.020	-	-	320.000
6175	19.020	19.020	-	-	320.000
6415	19.020	19.020	-	-	320.000

Table 91 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
5965	41.880	42.000	-	-	320.000
6165	42.000	42.000	-	-	320.000
6405	42.120	41.880	-	-	320.000

Table 92 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
5965	38.040	38.040	-	-	320.000
6165	38.040	38.040	-	-	320.000
6405	38.040	38.040	-	-	320.000

Table 93 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
5985	82.500	82.720	-	-	320.000
6145	82.940	82.720	-	-	320.000
6385	82.280	82.720	-	-	320.000

Table 94 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
5985	77.440	77.220	-	-	320.000
6145	77.220	77.220	-	-	320.000
6385	77.220	77.220	-	-	320.000

Table 95 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6025	167.580	166.320	-	-	320.000
6185	166.320	166.740	-	-	320.000
6345	168.000	166.740	-	-	320.000

Table 96 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6025	156.660	156.660	-	-	320.000
6185	156.660	156.660	-	-	320.000
6345	156.660	156.660	-	-	320.000

Table 97 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6435	21.420	21.360	-	-	320.000
6475	21.420	21.360	-	-	320.000
6515	21.240	21.300	-	-	320.000

Table 98 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6435	19.020	19.020	-	-	320.000
6475	19.020	19.020	-	-	320.000
6515	19.020	19.020	-	-	320.000

Table 99 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6445	42.120	42.240	-	-	320.000
6485	41.880	42.120	-	-	320.000
6525	41.760	42.120	-	-	320.000

Table 100 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6445	38.040	38.040	-	-	320.000
6485	38.040	38.040	-	-	320.000
6525	38.040	38.040	-	-	320.000

Table 101 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6465	82.720	82.720	-	-	320.000

Table 102 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6465	77.440	77.440	-	-	320.000

Table 103 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6505	166.740	166.320	-	-	320.000

Table 104 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6505	156.660	156.660	-	-	320.000

Table 105 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6535	21.300	21.480	-	-	320.000
6695	21.300	21.300	-	-	320.000
6855	21.240	21.300	-	-	320.000
6875	21.360	21.180	-	-	320.000

Table 106 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6535	19.020	19.020	-	-	320.000
6695	19.020	19.020	-	-	320.000
6855	18.960	19.020	-	-	320.000
6875	19.020	19.020	-	-	320.000

Table 107 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6565	42.120	42.000	-	-	320.000
6685	42.120	42.000	-	-	320.000
6845	42.000	42.240	-	-	320.000

Table 108 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6565	38.040	38.040	-	-	320.000
6685	37.920	38.040	-	-	320.000
6845	38.040	38.040	-	-	320.000

Table 109 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6545	82.500	82.500	-	-	320.000
6625	82.720	82.720	-	-	320.000
6705	82.500	82.500	-	-	320.000
6785	83.160	82.940	-	-	320.000
6865	82.720	83.160	-	-	320.000

Table 110 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6545	77.220	77.440	-	-	320.000
6625	77.440	77.220	-	-	320.000
6705	77.440	77.220	-	-	320.000
6785	77.220	77.220	-	-	320.000
6865	77.220	77.220	-	-	320.000

Table 111 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6665	167.160	165.480	-	-	320.000
6825	167.160	166.740	-	-	320.000

Table 112 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6665	156.240	156.240	-	-	320.000
6825	156.660	156.660	-	-	320.000

Table 113 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6895	21.360	21.300	-	-	320.000
6995	21.360	21.360	-	-	320.000
7095	21.240	21.420	-	-	320.000

Table 114 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6895	19.020	19.020	-	-	320.000
6995	19.020	19.020	-	-	320.000
7095	19.020	19.020	-	-	320.000

Table 115 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6885	41.880	42.120	-	-	320.000
6925	42.120	42.000	-	-	320.000
7005	42.000	42.120	-	-	320.000
7085	42.240	42.000	-	-	320.000

Table 116 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6885	38.040	38.040	-	-	320.000
6925	38.040	38.040	-	-	320.000
7005	38.040	38.040	-	-	320.000
7085	38.040	38.040	-	-	320.000

Table 117 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6945	82.500	82.720	-	-	320.000
7025	82.500	82.720	-	-	320.000

Table 118 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6945	77.220	77.440	-	-	320.000
7025	77.220	77.220	-	-	320.000

Table 119 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6985	167.160	166.740	-	-	320.000

Table 120 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6985	156.660	156.660	-	-	320.000

Table 121 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
5955	21.240	21.300	-	-	320.000
6175	21.360	21.360	-	-	320.000
6415	21.480	21.240	-	-	320.000

Table 122 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
5955	19.020	19.020	-	-	320.000
6175	19.020	19.020	-	-	320.000
6415	19.020	19.020	-	-	320.000

Table 123 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
5965	42.000	41.880	-	-	320.000
6165	42.000	42.000	-	-	320.000
6405	41.880	42.120	-	-	320.000

Table 124 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
5965	38.040	38.040	-	-	320.000
6165	38.040	38.040	-	-	320.000
6405	38.040	38.040	-	-	320.000

Table 125 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
5985	82.500	82.720	-	-	320.000
6145	82.720	82.720	-	-	320.000
6385	82.720	82.720	-	-	320.000

Table 126 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
5985	77.220	77.220	-	-	320.000
6145	77.220	77.220	-	-	320.000
6385	77.220	77.220	-	-	320.000

Table 127 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6025	168.000	167.160	-	-	320.000
6185	168.000	166.320	-	-	320.000
6345	167.580	166.740	-	-	320.000

Table 128 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6025	156.240	156.240	-	-	320.000
6185	156.660	156.660	-	-	320.000
6345	156.660	156.660	-	-	320.000

Table 129 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6435	19.020	19.020	-	-	320.000
6475	19.020	19.020	-	-	320.000
6515	19.020	19.020	-	-	320.000

Table 130 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6445	38.040	38.040	-	-	320.000
6485	38.040	38.040	-	-	320.000
6525	38.040	38.040	-	-	320.000

Table 131 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6465	77.220	77.220	-	-	320.000
6545	77.220	77.000	-	-	320.000

Table 132 - 99% Bandwidth Results

Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6505	156.660	156.240	-	-	320.000

Table 133 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6535	21.360	21.240	-	-	320.000
6695	21.360	21.180	-	-	320.000
6855	21.300	21.300	-	-	320.000

Table 134 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6535	19.020	19.020	-	-	320.000
6695	19.020	19.020	-	-	320.000
6855	19.020	19.020	-	-	320.000

Table 135 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6565	41.880	42.120	-	-	320.000
6685	41.880	42.240	-	-	320.000
6845	41.760	42.000	-	-	320.000

Table 136 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6565	38.040	38.040	-	-	320.000
6685	38.040	38.040	-	-	320.000
6845	38.040	38.040	-	-	320.000

Table 137 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6625	82.500	83.160	-	-	320.000
6705	82.720	82.940	-	-	320.000
6785	82.720	82.720	-	-	320.000

Table 138 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6625	77.220	77.220	-	-	320.000
6705	77.000	77.220	-	-	320.000
6785	77.220	77.220	-	-	320.000

Table 139 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6665	166.740	166.740	-	-	320.000

Table 140 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6665	156.240	156.240	-	-	320.000

Table 141 - 99% Bandwidth Results



MIMO SDM

Protocol	26 dB Bandwidth (MHz)	
	Minimum	Maximum
802.11ax HE20 SU SP	21.120	21.540
802.11ax HE40 SU SP	41.880	42.360
802.11ax HE80 SU SP	82.500	83.160
802.11ax HE160 SU SP	166.320	167.160
802.11ax HE20 SU LPI	21.180	21.540
802.11ax HE40 SU LPI	41.640	42.360
802.11ax HE80 SU LPI	82.280	83.160
802.11ax HE160 SU LPI	166.320	167.160
802.11ax HE40 SU VLP	41.880	42.120
802.11ax HE80 SU VLP	82.280	83.160
802.11ax HE160 SU VLP	166.320	166.740

Table 142 - 26 dB Bandwidth Summary Results - MIMO SDM

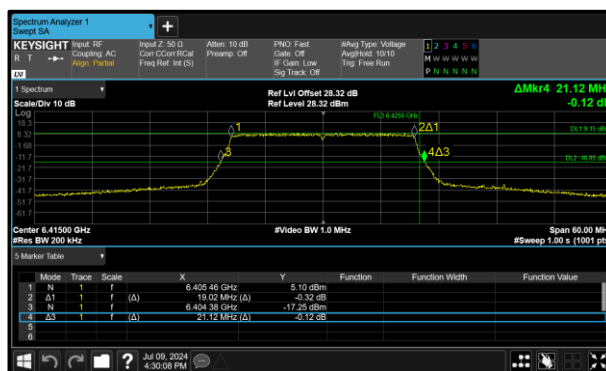


Figure 101 - 802.11ax HE20 SU SP Minimum 26 dB EBW

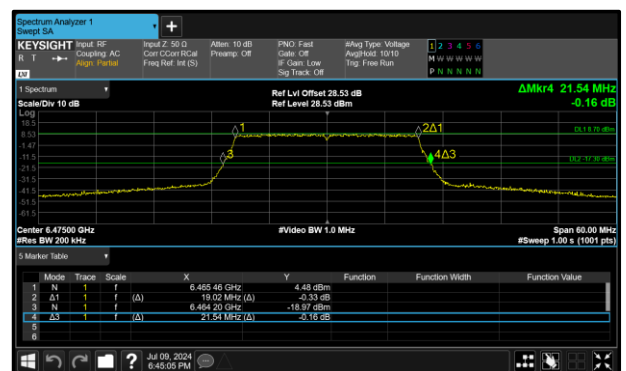


Figure 102 - 802.11ax HE20 SU SP Maximum 26 dB EBW

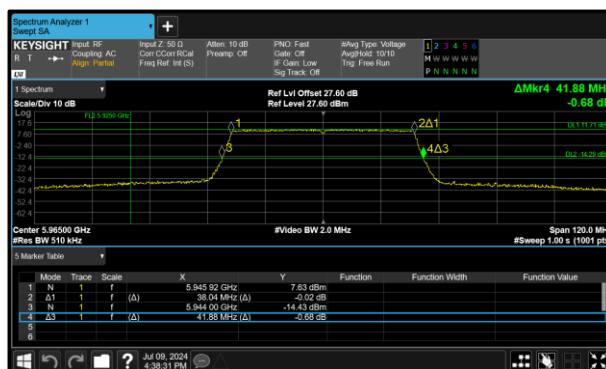


Figure 103 - 802.11ax HE40 SU SP Minimum 26 dB EBW

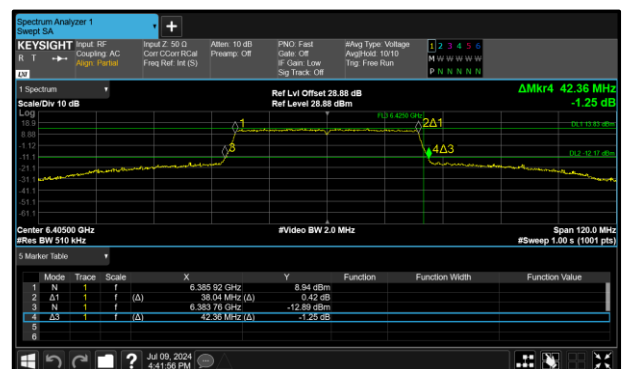
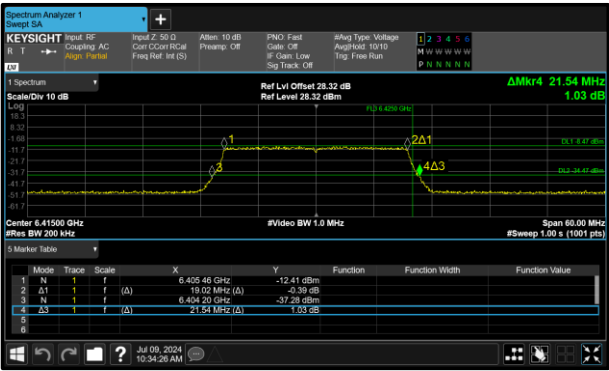
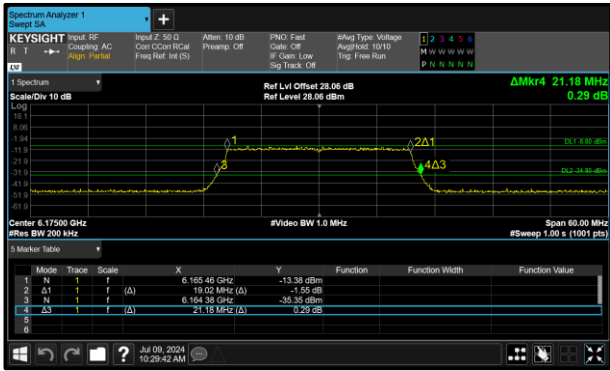
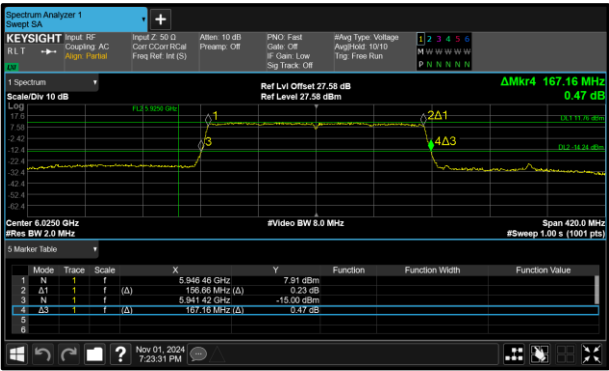
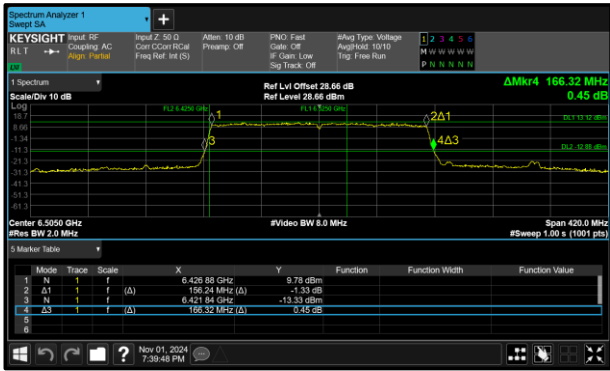
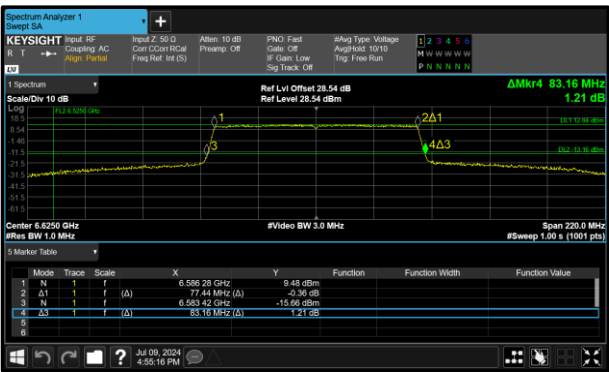
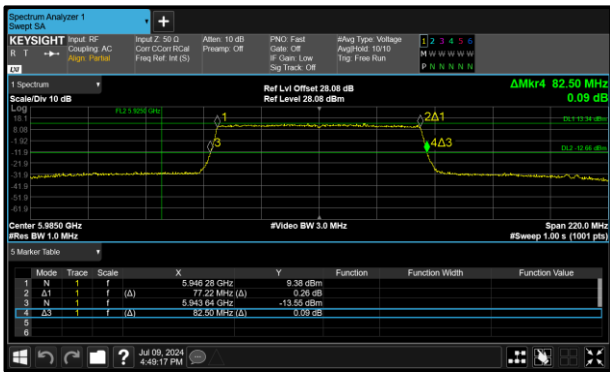


Figure 104 - 802.11ax HE40 SU SP Maximum 26 dB EBW



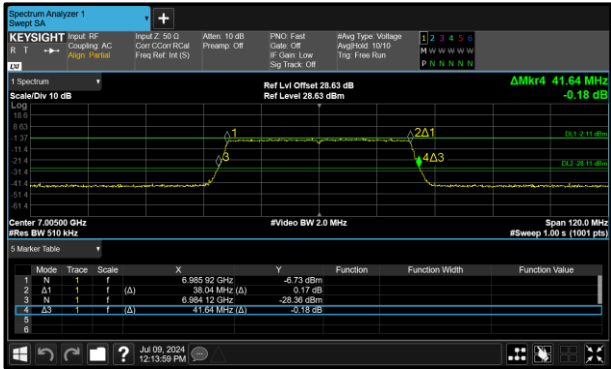


Figure 111 - 802.11ax HE40 SU LPI Minimum 26 dB EBW

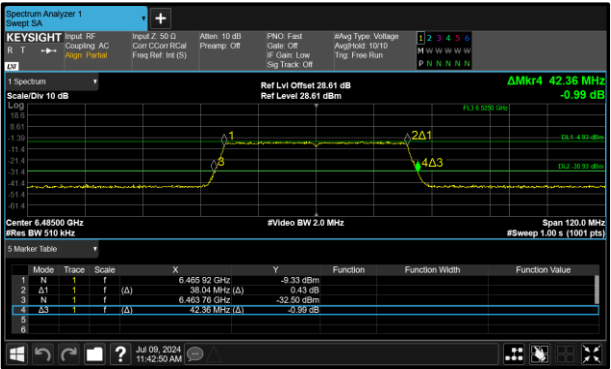


Figure 112 - 802.11ax HE40 SU LPI Maximum 26 dB EBW

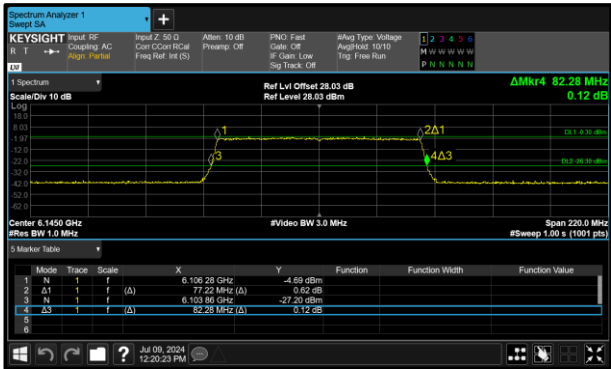


Figure 113 - 802.11ax HE80 SU LPI Minimum 26 dB EBW

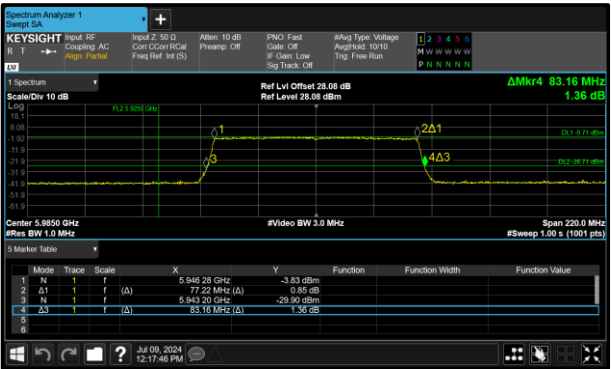


Figure 114 - 802.11ax HE80 SU LPI Maximum 26 dB EBW

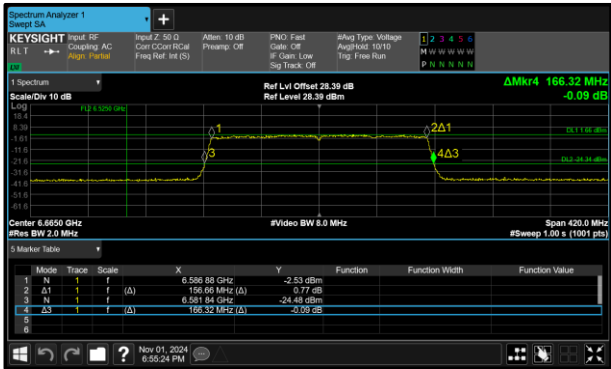


Figure 115 - 802.11ax HE160 SU LPI Minimum 26 dB EBW

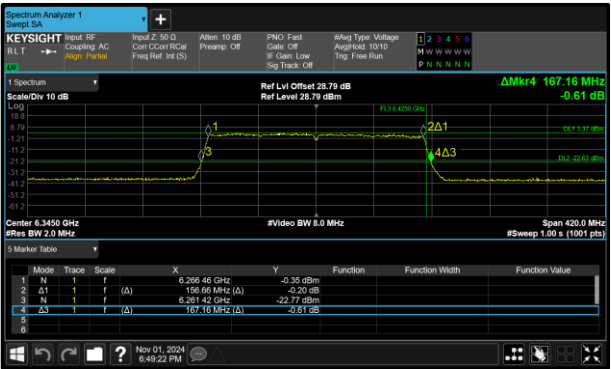


Figure 116 - 802.11ax HE160 SU LPI Maximum 26 dB EBW

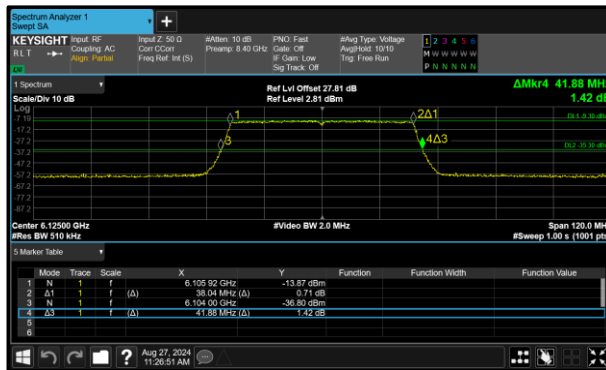


Figure 117 - 802.11ax HE40 SU VLP Minimum 26 dB EBW

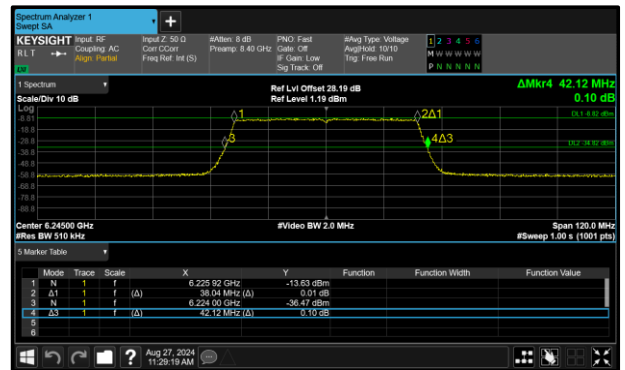


Figure 118 - 802.11ax HE40 SU VLP Maximum 26 dB EBW

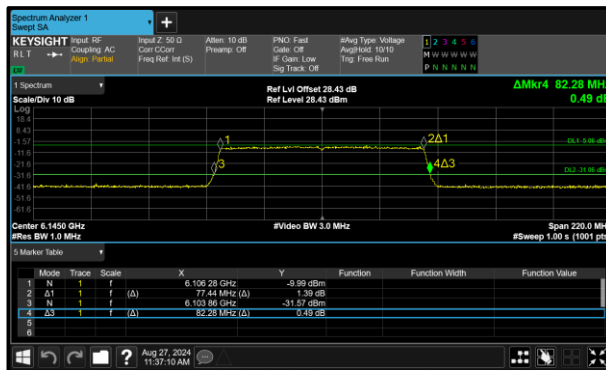


Figure 119 - 802.11ax HE80 SU VLP Minimum 26 dB EBW

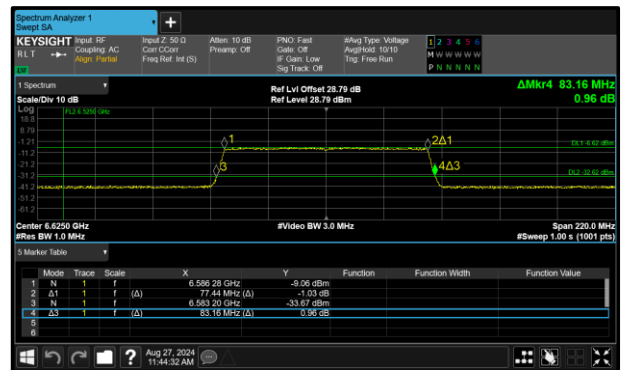


Figure 120 - 802.11ax HE80 SU VLP Maximum 26 dB EBW

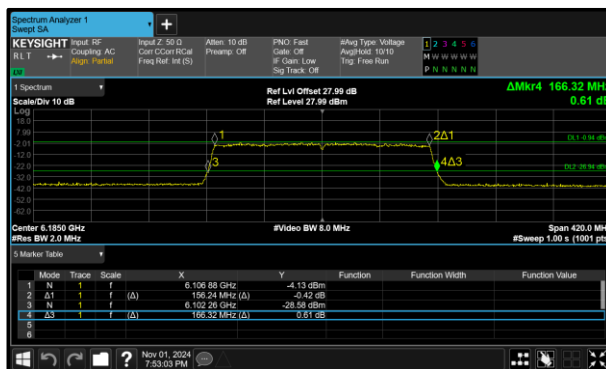


Figure 121 - 802.11ax HE160 SU VLP Minimum 26 dB EBW

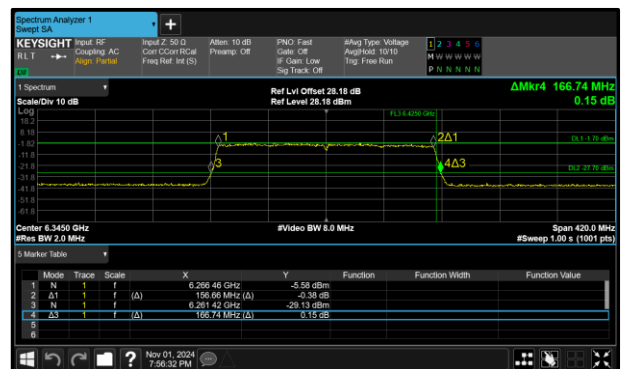


Figure 122 - 802.11ax HE160 SU VLP Maximum 26 dB EBW



Protocol	99% Bandwidth (MHz)	
	Minimum	Maximum
802.11ax HE20 SU SP	18.960	19.080
802.11ax HE40 SU SP	37.920	38.160
802.11ax HE80 SU SP	77.220	77.440
802.11ax HE160 SU SP	156.240	156.660
802.11ax HE20 SU LPI	18.960	19.080
802.11ax HE40 SU LPI	37.920	38.040
802.11ax HE80 SU LPI	77.220	77.440
802.11ax HE160 SU LPI	156.240	156.660
802.11ax HE40 SU VLP	37.920	38.040
802.11ax HE80 SU VLP	77.220	77.440
802.11ax HE160 SU VLP	156.240	156.660

Table 143 - 99% Bandwidth Summary Results - MIMO SDM

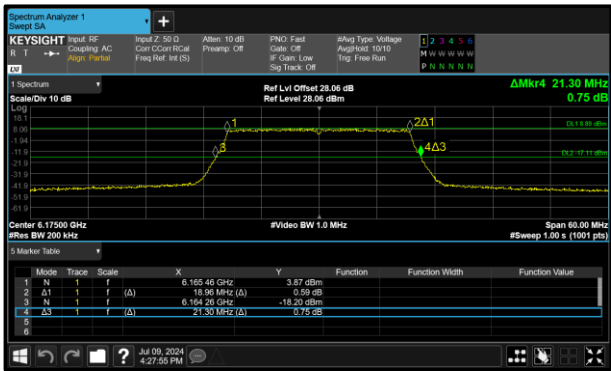


Figure 123 - 802.11ax HE20 SU SP
Minimum 99% OBW

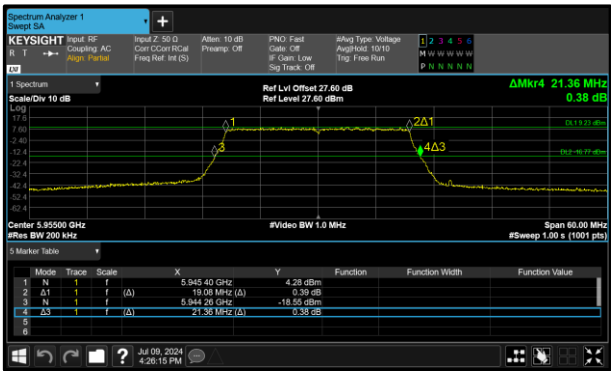


Figure 124 - 802.11ax HE20 SU SP
Maximum 99% OBW

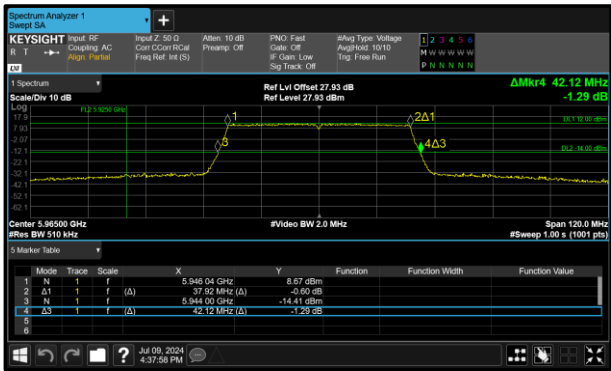


Figure 125 - 802.11ax HE40 SU SP
Minimum 99% OBW

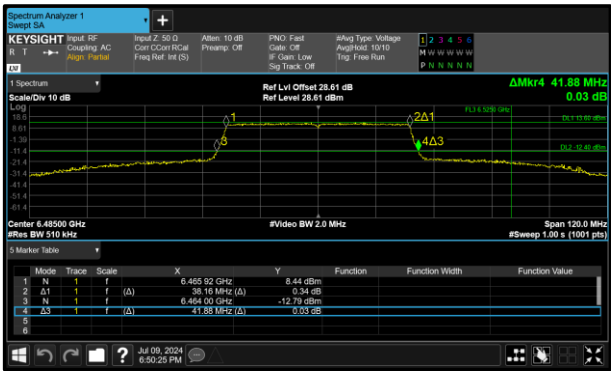


Figure 126 - 802.11ax HE40 SU SP
Maximum 99% OBW

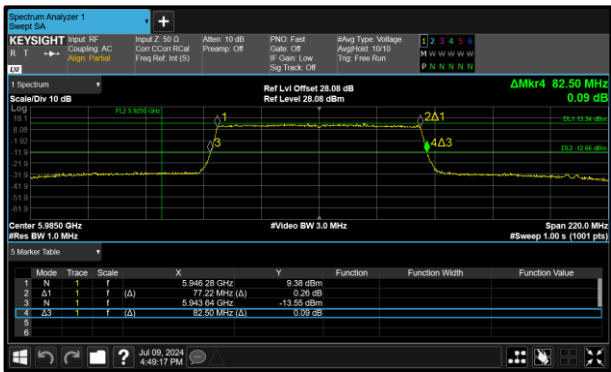


Figure 127 - 802.11ax HE80 SU SP
Minimum 99% OBW

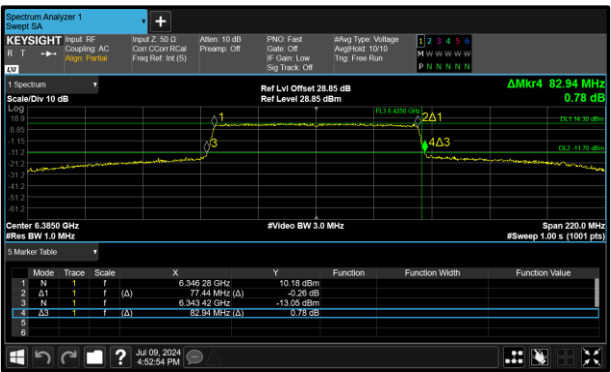


Figure 128 - 802.11ax HE80 SU SP
Maximum 99% OBW

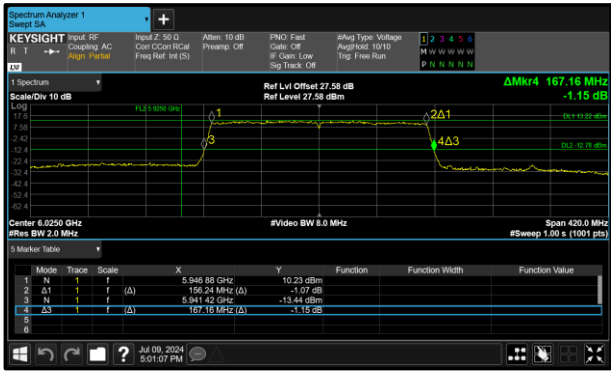


Figure 129 - 802.11ax HE160 SU SP
Minimum 99% OBW

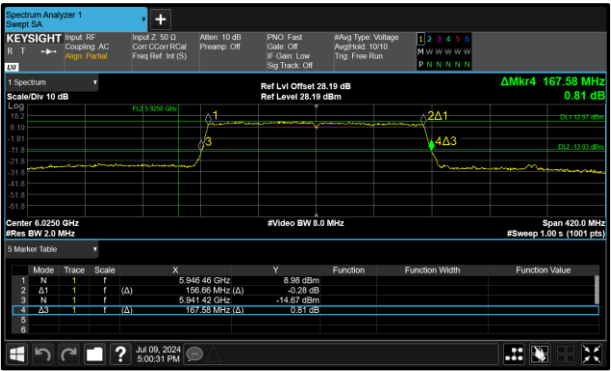


Figure 130 - 802.11ax HE160 SU SP
Maximum 99% OBW

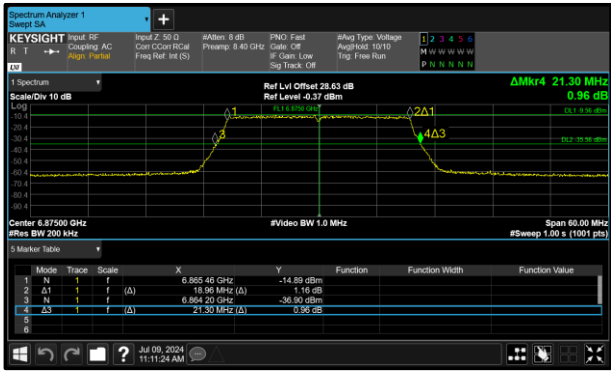


Figure 131 - 802.11ax HE20 SU LPI
Minimum 99% OBW

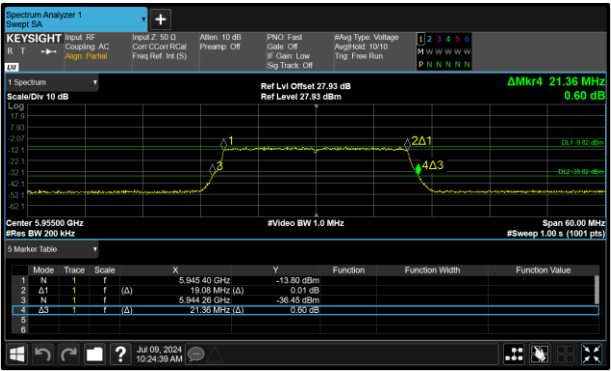


Figure 132 - 802.11ax HE20 SU LPI
Maximum 99% OBW

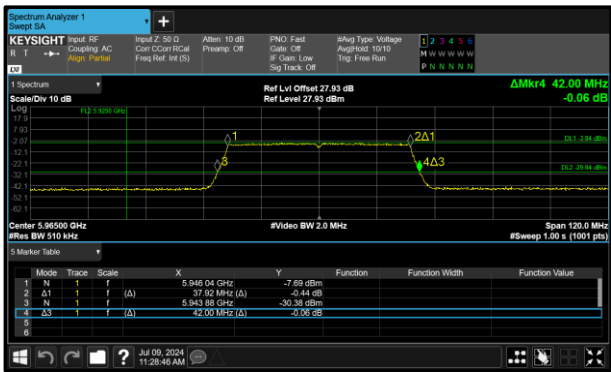


Figure 133 - 802.11ax HE40 SU LPI
Minimum 99% OBW

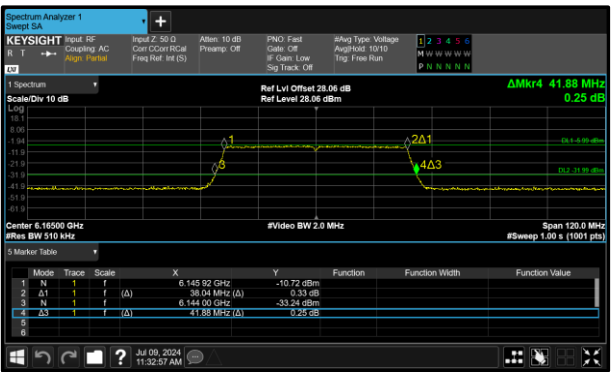


Figure 134 - 802.11ax HE40 SU LPI
Maximum 99% OBW

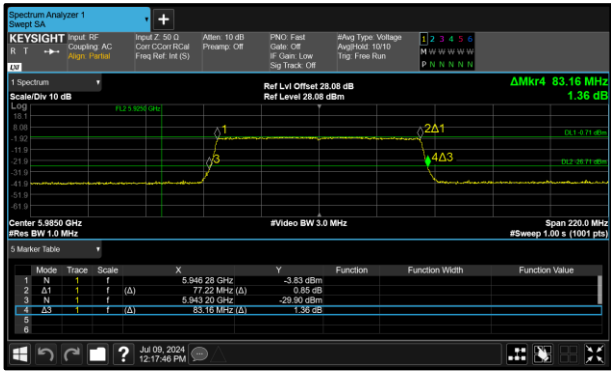


Figure 135 - 802.11ax HE80 SU LPI
Minimum 99% OBW

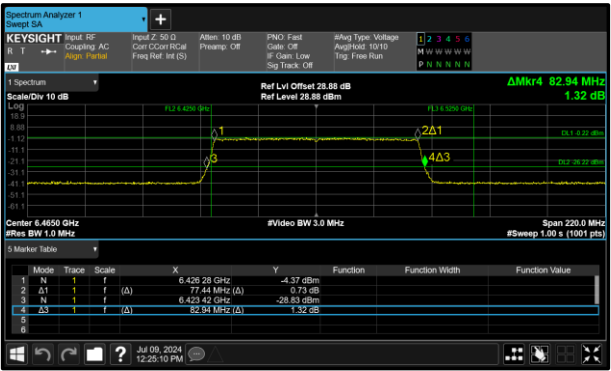


Figure 136 - 802.11ax HE80 SU LPI
Maximum 99% OBW

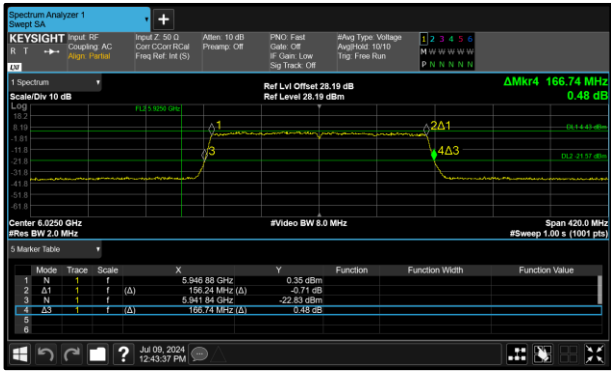


Figure 137 - 802.11ax HE160 SU LPI
Minimum 99% OBW

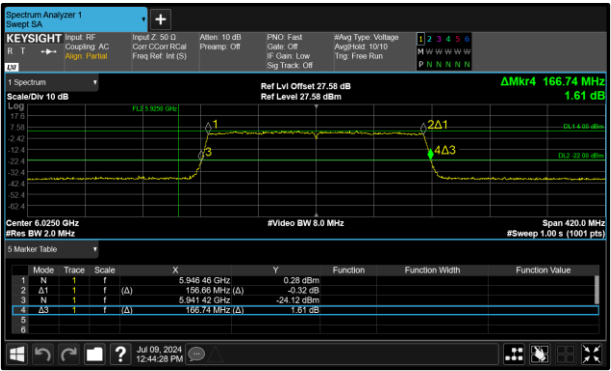


Figure 138 - 802.11ax HE160 SU LPI
Maximum 99% OBW

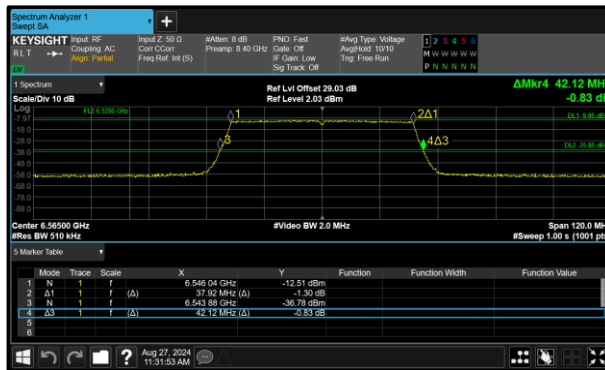


Figure 139 - 802.11ax HE40 SU VLP
Minimum 99% OBW

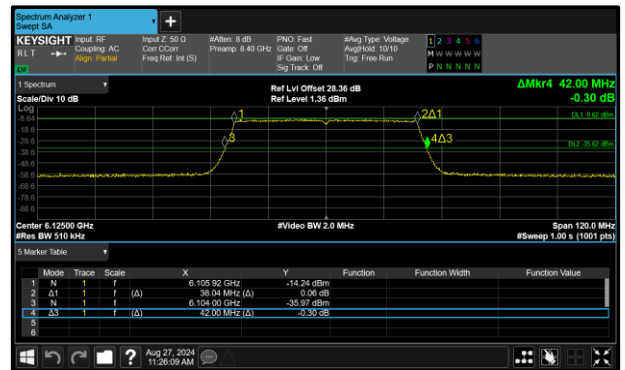


Figure 140 - 802.11ax HE40 SU VLP
Maximum 99% OBW

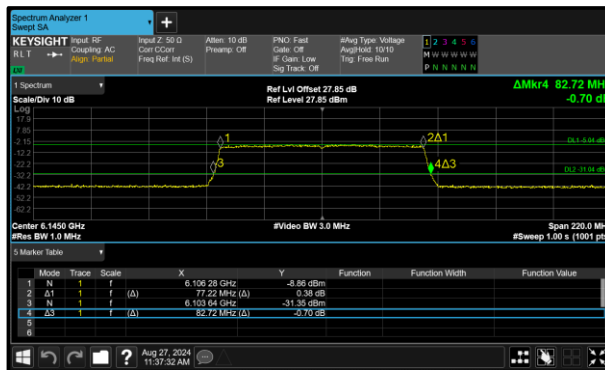


Figure 141 - 802.11ax HE80 SU VLP
Minimum 99% OBW

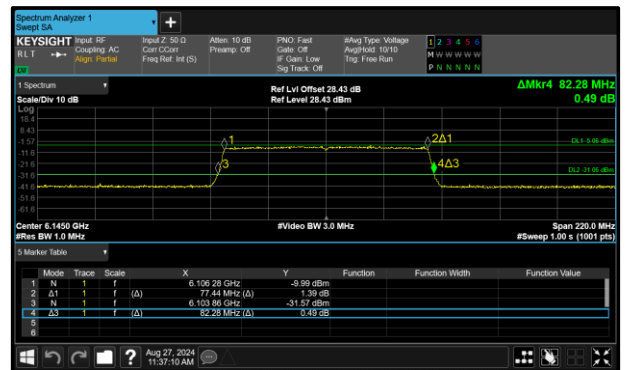


Figure 142 - 802.11ax HE80 SU VLP
Maximum 99% OBW

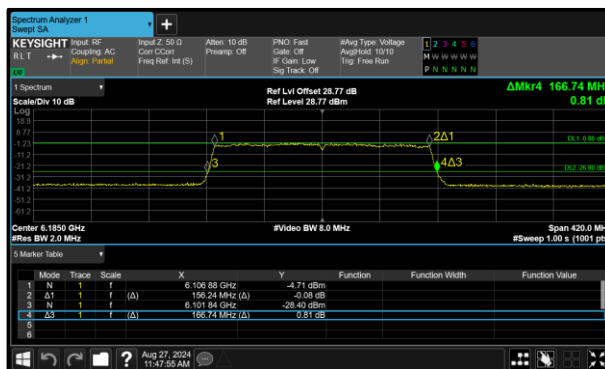


Figure 143 - 802.11ax HE160 SU VLP
Minimum 99% OBW

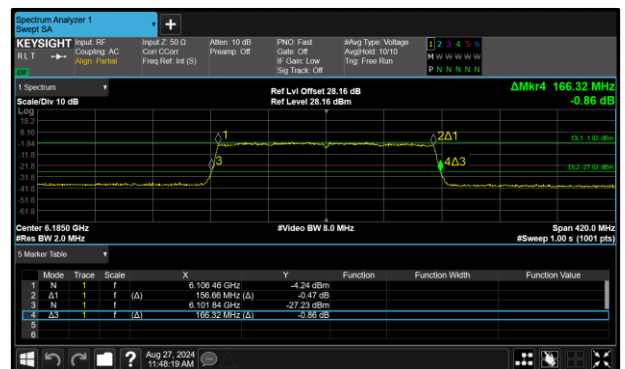


Figure 144 - 802.11ax HE160 SU VLP
Maximum 99% OBW



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407 (a)(11)	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6125	42.000	41.880	-	-	320.000
6245	41.880	42.120	-	-	320.000
6405	41.880	42.120	-	-	320.000
6565	42.120	42.000	-	-	320.000
6725	41.880	41.880	-	-	320.000
6845	42.120	41.880	-	-	320.000

Table 144 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6125	38.040	38.040	-	-	320.000
6245	38.040	38.040	-	-	320.000
6405	38.040	38.040	-	-	320.000
6565	37.920	38.040	-	-	320.000
6725	38.040	38.040	-	-	320.000
6845	38.040	38.040	-	-	320.000

Table 145 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407 (a)(11)	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6145	82.280	82.720	-	-	320.000
6225	82.500	82.500	-	-	320.000
6385	82.720	82.720	-	-	320.000
6625	82.720	83.160	-	-	320.000
6705	82.720	82.940	-	-	320.000
6785	82.720	82.280	-	-	320.000

Table 146 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6145	77.440	77.220	-	-	320.000
6225	77.220	77.220	-	-	320.000
6385	77.220	77.220	-	-	320.000
6625	77.440	77.440	-	-	320.000
6705	77.220	77.220	-	-	320.000
6785	77.440	77.220	-	-	320.000

Table 147 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407 (a)(11)	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6185	166.320	166.740	-	-	320.000
6345	166.740	166.740	-	-	320.000
6665	166.740	166.740	-	-	320.000

Table 148 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6185	156.240	156.660	-	-	320.000
6345	156.660	156.660	-	-	320.000
6665	156.240	156.660	-	-	320.000

Table 149 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
5955	21.360	21.240	-	-	320.000
6175	21.180	21.420	-	-	320.000
6415	21.420	21.540	-	-	320.000

Table 150 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
5955	19.080	19.020	-	-	320.000
6175	19.020	19.020	-	-	320.000
6415	19.080	19.020	-	-	320.000

Table 151 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
5965	42.000	41.760	-	-	320.000
6165	41.880	41.880	-	-	320.000
6405	42.120	42.240	-	-	320.000

Table 152 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
5965	37.920	37.920	-	-	320.000
6165	38.040	38.040	-	-	320.000
6405	38.040	38.040	-	-	320.000

Table 153 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
5985	83.160	82.720	-	-	320.000
6145	82.280	83.160	-	-	320.000
6385	82.500	82.500	-	-	320.000

Table 154 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
5985	77.220	77.220	-	-	320.000
6145	77.220	77.220	-	-	320.000
6385	77.220	77.220	-	-	320.000

Table 155 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6025	166.740	166.740	-	-	320.000
6185	166.740	166.740	-	-	320.000
6345	167.160	166.740	-	-	320.000

Table 156 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6025	156.240	156.660	-	-	320.000
6185	156.240	156.660	-	-	320.000
6345	156.240	156.660	-	-	320.000

Table 157 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6435	21.360	21.480	-	-	320.000
6475	21.360	21.240	-	-	320.000
6515	21.300	21.420	-	-	320.000

Table 158 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6435	19.020	19.020	-	-	320.000
6475	19.020	19.020	-	-	320.000
6515	19.020	19.020	-	-	320.000

Table 159 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6445	41.880	41.880	-	-	320.000
6485	41.760	42.360	-	-	320.000
6525	41.880	41.880	-	-	320.000

Table 160 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6445	38.040	38.040	-	-	320.000
6485	38.040	38.040	-	-	320.000
6525	38.040	38.040	-	-	320.000

Table 161 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6465	82.940	82.720	-	-	320.000

Table 162 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6465	77.440	77.220	-	-	320.000

Table 163 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6505	166.740	166.740	-	-	320.000

Table 164 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6505	156.240	156.240	-	-	320.000

Table 165 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6535	21.300	21.540	-	-	320.000
6695	21.360	21.240	-	-	320.000
6855	21.360	21.480	-	-	320.000
6875	21.480	21.300	-	-	320.000

Table 166 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6535	19.020	19.080	-	-	320.000
6695	19.020	19.080	-	-	320.000
6855	19.020	19.080	-	-	320.000
6875	19.080	18.960	-	-	320.000

Table 167 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6565	42.120	42.240	-	-	320.000
6685	42.120	42.000	-	-	320.000
6845	42.120	42.240	-	-	320.000

Table 168 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6565	38.040	38.040	-	-	320.000
6685	38.040	38.040	-	-	320.000
6845	38.040	38.040	-	-	320.000

Table 169 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6545	82.500	82.720	-	-	320.000
6625	82.280	82.500	-	-	320.000
6705	82.500	82.280	-	-	320.000
6785	82.280	82.940	-	-	320.000
6865	82.280	83.160	-	-	320.000

Table 170 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6545	77.220	77.220	-	-	320.000
6625	77.220	77.220	-	-	320.000
6705	77.220	77.220	-	-	320.000
6785	77.220	77.220	-	-	320.000
6865	77.220	77.220	-	-	320.000

Table 171 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6665	166.740	166.320	-	-	320.000
6825	166.320	166.740	-	-	320.000

Table 172 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6665	156.240	156.240	-	-	320.000
6825	156.660	156.660	-	-	320.000

Table 173 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6895	21.360	21.300	-	-	320.000
6995	21.360	21.420	-	-	320.000
7095	21.300	21.420	-	-	320.000

Table 174 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6895	19.020	19.080	-	-	320.000
6995	19.020	19.020	-	-	320.000
7095	19.080	19.080	-	-	320.000

Table 175 - 99% Bandwidth Results