

Figure 728 - U-NII-3 - 5825 MHz (CH165), HT20, CDD, Core 0 + Core 1, 1 GHz to 40 GHz, Horizontal

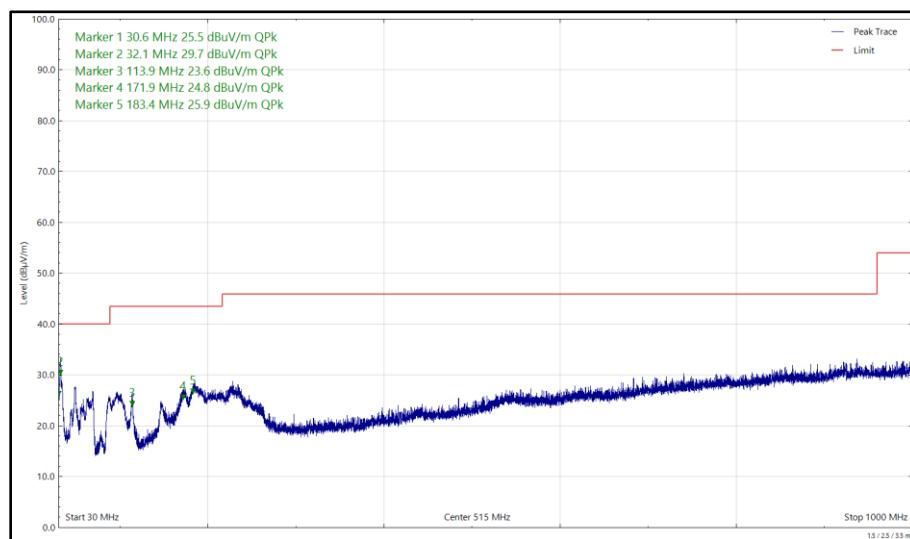


Figure 729 - U-NII-3 - 5825 MHz (CH165), HT20, CDD, Core 0 + Core 1, 30 MHz to 1 GHz, Vertical (Peak)

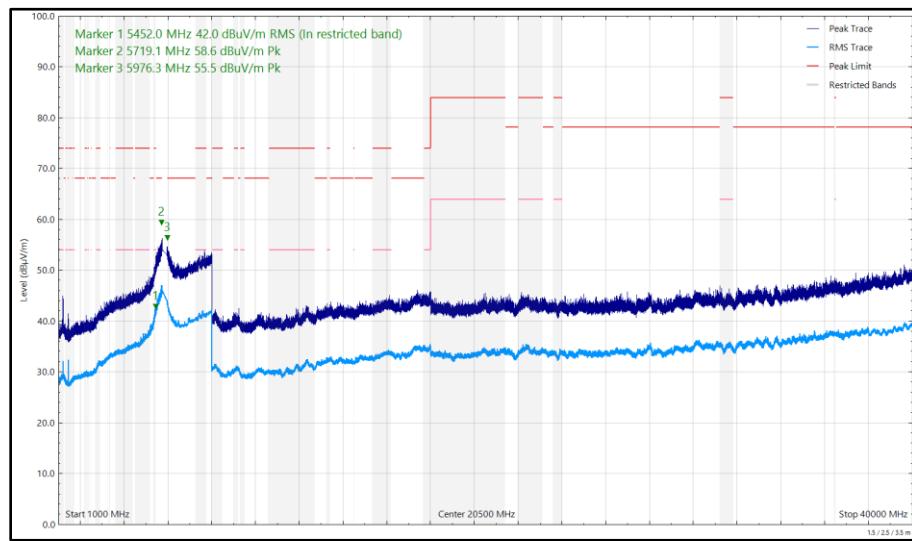


Figure 730 - U-NII-3 - 5825 MHz (CH165), HT20, CDD, Core 0 + Core 1, 1 GHz to 40 GHz, Vertical

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
31.969	29.32	40.00	-10.68	Q-Peak	238	100	Vertical
149.949	26.01	43.50	-17.49	Q-Peak	10	225	Horizontal
169.394	24.25	43.50	-19.25	Q-Peak	360	102	Vertical
171.632	24.05	43.50	-19.45	Q-Peak	5	249	Horizontal
183.062	26.37	43.50	-17.13	Q-Peak	223	100	Vertical
191.156	24.17	43.50	-19.33	Q-Peak	231	263	Horizontal
5103.690	58.70	74.00	-15.30	Peak	350	305	Vertical
5109.890	38.79	54.00	-15.21	RMS	71	400	Horizontal
5109.986	46.06	54.00	-7.94	RMS	337	285	Vertical
5351.461	44.48	54.00	-9.52	RMS	324	275	Vertical
5389.498	57.33	74.00	-16.67	Peak	324	284	Vertical
5596.404	55.15	68.20	-13.05	Peak	36	299	Vertical

Table 742 - U-NII-1 - 5180 MHz (CH36), HE20, RU26-0, CDD, Core 0 + Core 1, 30 MHz to 40 GHz

No other emissions found within 10 dB of the limit.

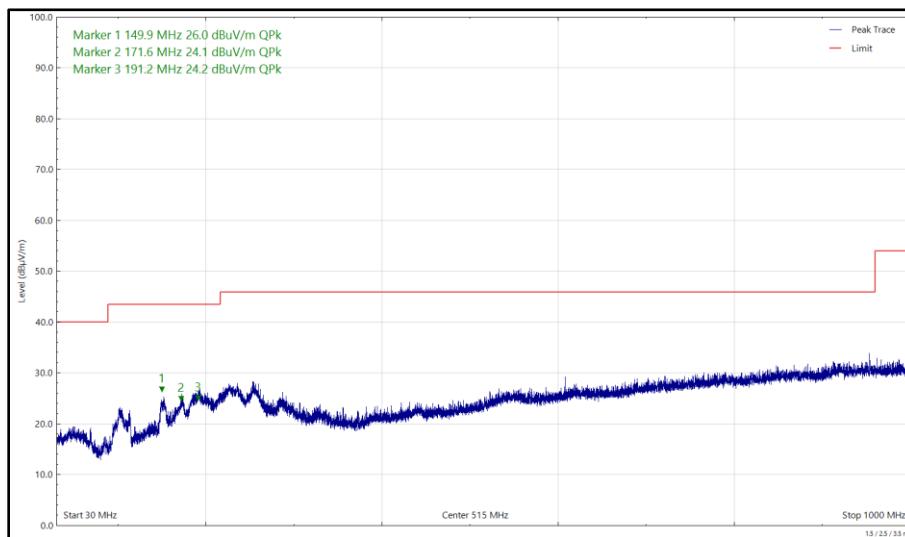


Figure 731 - U-NII-1 - 5180 MHz (CH36), HE20, RU26-0, CDD, Core 0 + Core 1, 30 MHz to 1 GHz, Horizontal (Peak)

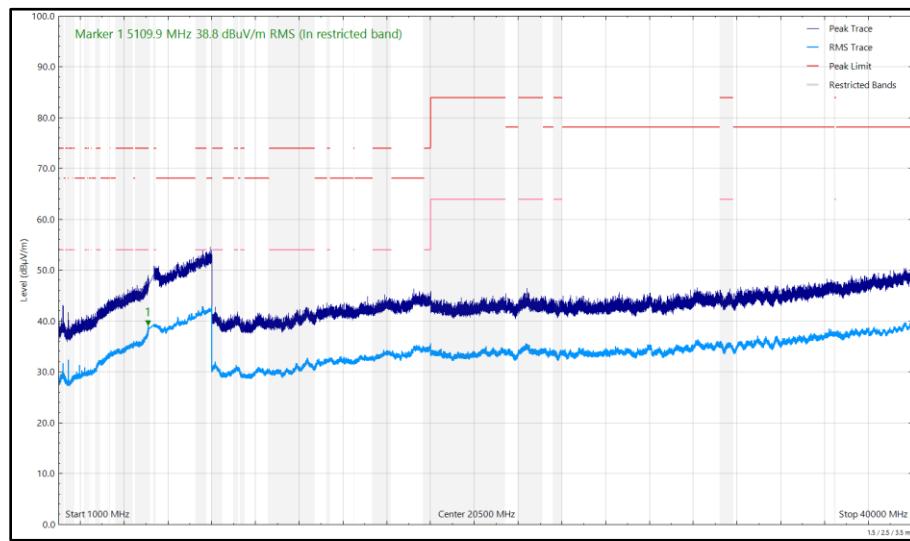


Figure 732 - U-NII-1 - 5180 MHz (CH36), HE20, RU26-0, CDD, Core 0 + Core 1, 1 GHz to 40 GHz, Horizontal

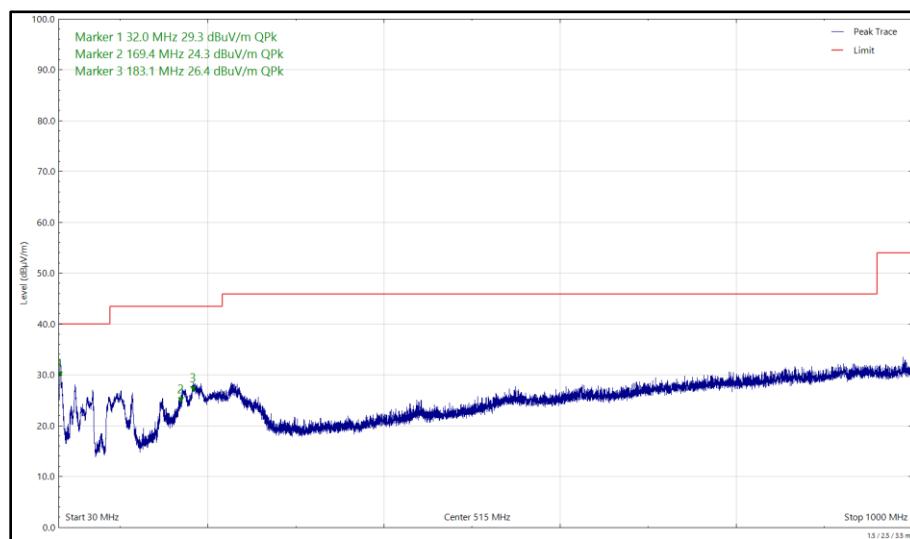


Figure 733 - U-NII-1 - 5180 MHz (CH36), HE20, RU26-0, CDD, Core 0 + Core 1, 30 MHz to 1 GHz, Vertical (Peak)

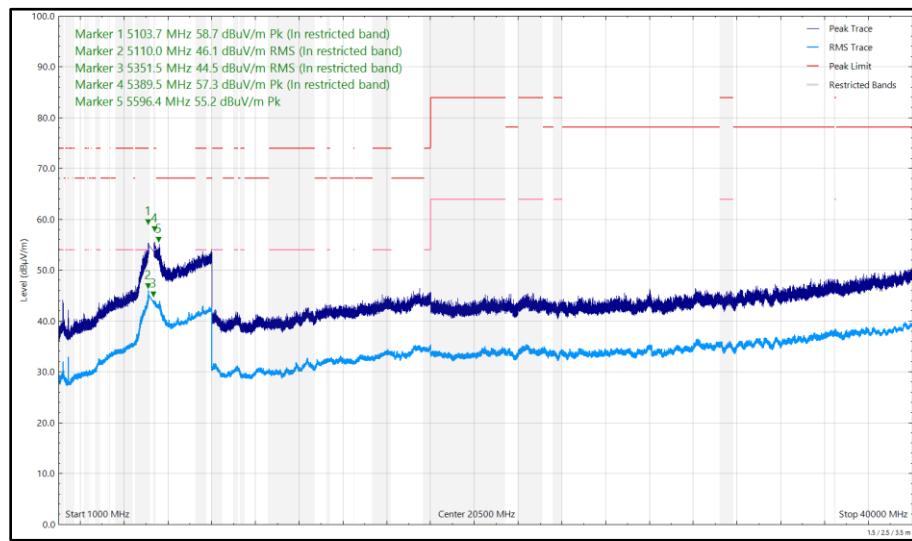


Figure 734 - U-NII-1 - 5180 MHz (CH36), HE20, RU26-0, CDD, Core 0 + Core 1, 1 GHz to 40 GHz, Vertical

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
5139.058	56.79	74.00	-17.21	Peak	350	282	Vertical
5146.986	44.45	54.00	-9.55	RMS	347	295	Vertical
5390.472	45.71	54.00	-8.29	RMS	34	282	Vertical
5393.942	58.28	74.00	-15.72	Peak	322	269	Vertical
5543.116	56.43	68.20	-11.77	Peak	29	273	Vertical

Table 743 - U-NII-2A - 5320 MHz (CH64), HE20, RU52-37, CDD, Core 0 + Core 1, 1 GHz to 40 GHz

No other emissions found within 10 dB of the limit.

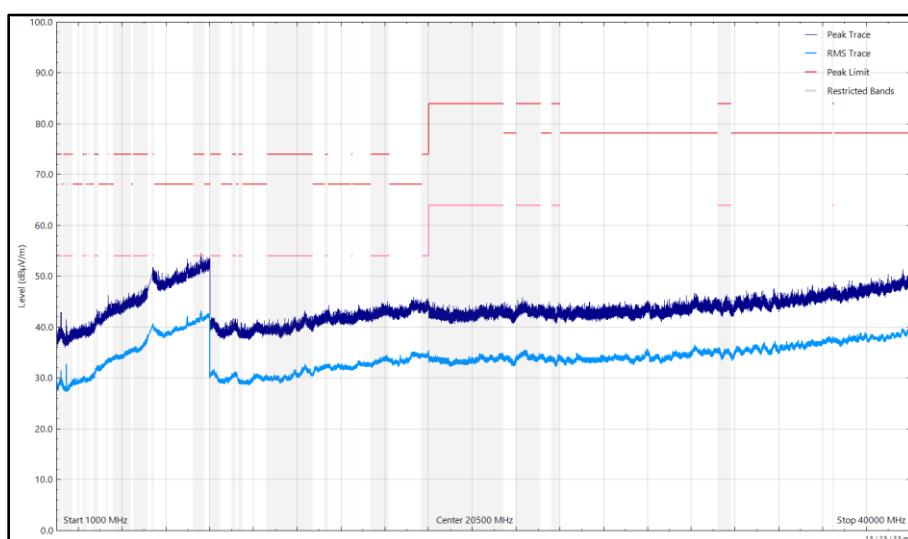


Figure 735 - U-NII-2A - 5320 MHz (CH64), HE20, RU52-37, CDD, Core 0 + Core 1, 1 GHz to 40 GHz, Horizontal

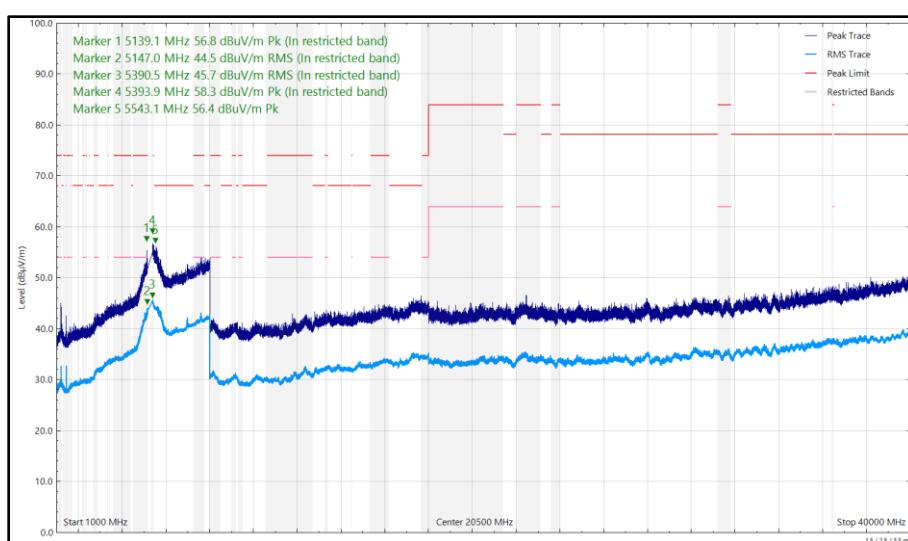


Figure 736 - U-NII-2A - 5320 MHz (CH64), HE20, RU52-37, CDD, Core 0 + Core 1, 1 GHz to 40 GHz, Vertical

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
5337.811	56.57	68.20	-11.63	Peak	325	307	Vertical
5348.113	51.65	68.20	-16.55	Peak	298	390	Horizontal
5406.754	57.14	74.00	-16.86	Peak	36	271	Vertical
5406.893	38.80	54.00	-15.20	RMS	37	366	Horizontal
5408.090	45.01	54.00	-8.99	RMS	328	319	Vertical
5726.478	55.80	68.20	-12.40	Peak	34	311	Vertical
5806.560	50.44	68.20	-17.76	Peak	292	371	Horizontal

Table 744 - U-NII-2C - 5500 MHz (CH100), HE20, RU52-37, CDD, Core 0 + Core 1, 1 GHz to 40 GHz

No other emissions found within 10 dB of the limit.

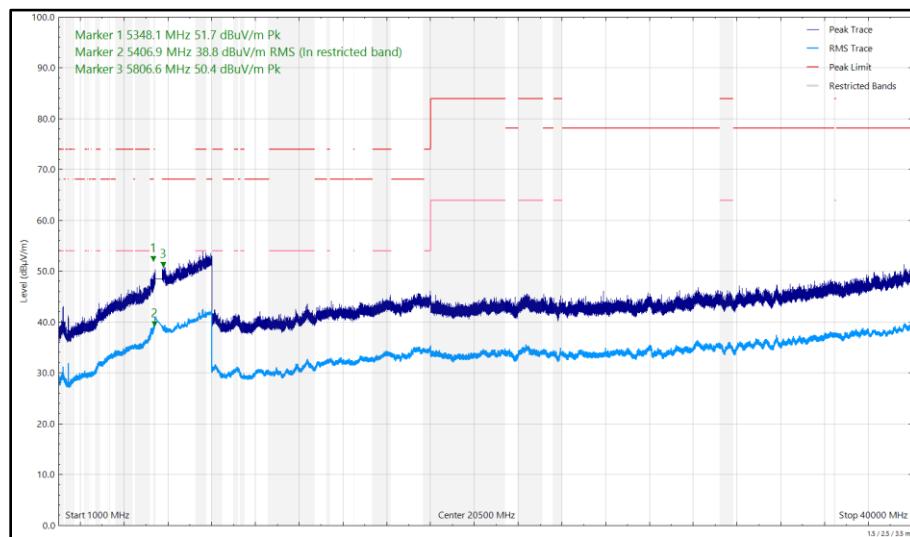


Figure 737 - U-NII-2C - 5500 MHz (CH100), HE20, RU52-37, CDD, Core 0 + Core 1, 1 GHz to 40 GHz, Horizontal

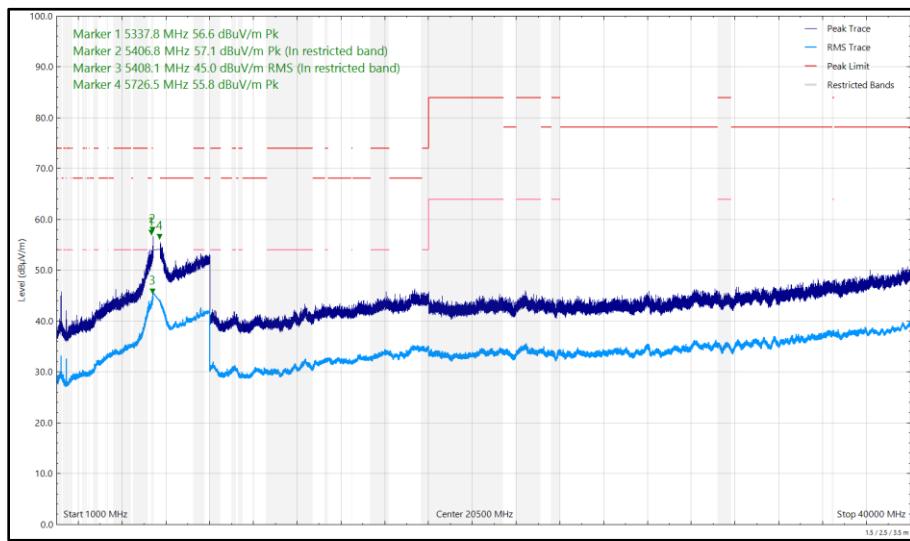


Figure 738 - U-NII-2C - 5500 MHz (CH100), HE20, RU52-37, CDD, Core 0 + Core 1, 1 GHz to 40 GHz, Vertical

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
5442.213	55.59	74.00	-18.41	Peak	323	264	Vertical
5459.841	42.94	54.00	-11.06	RMS	33	282	Vertical
5468.533	55.68	68.20	-12.52	Peak	325	267	Vertical
5763.034	58.51	68.20	-9.69	Peak	40	281	Vertical
5782.045	53.01	68.20	-15.19	Peak	68	392	Horizontal

Table 745 - U-NII-2C - 5700 MHz (CH140), HE20, RU52-37, CDD, Core 0 + Core 1, 1 GHz to 40 GHz

No other emissions found within 10 dB of the limit.

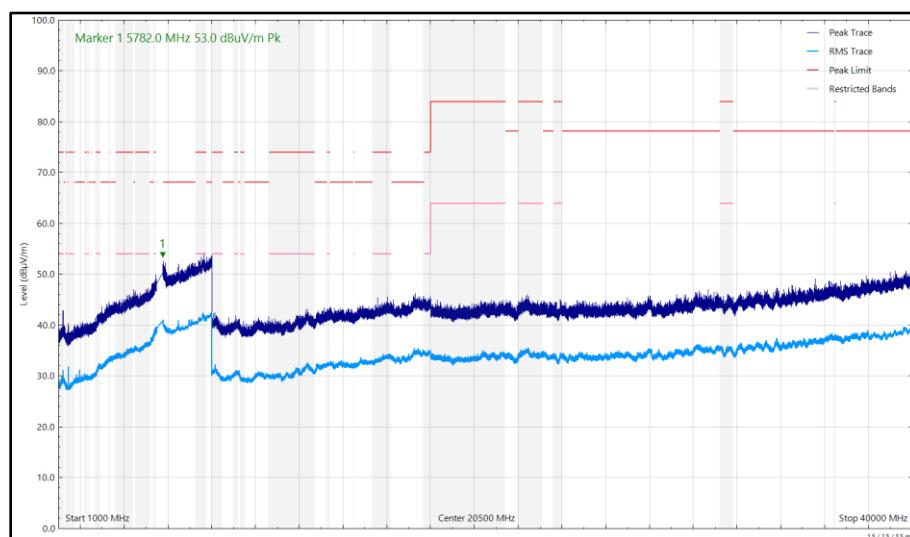


Figure 739 - U-NII-2C - 5700 MHz (CH140), HE20, RU52-37, CDD, Core 0 + Core 1, 1 GHz to 40 GHz, Horizontal

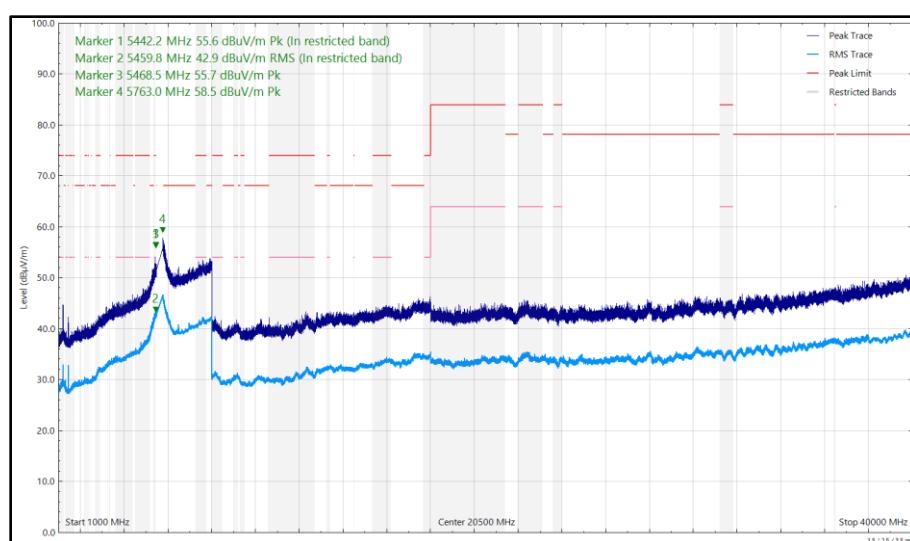


Figure 740 - U-NII-2C - 5700 MHz (CH140), HE20, RU52-37, CDD, Core 0 + Core 1, 1 GHz to 40 GHz, Vertical

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
5459.597	43.11	54.00	-10.89	RMS	328	297	Vertical
5558.898	52.23	68.20	-15.97	Peak	67	400	Horizontal
5623.440	57.84	68.20	-10.36	Peak	38	248	Vertical
5851.655	52.72	68.20	-15.48	Peak	290	347	Horizontal
5856.571	57.92	68.20	-10.28	Peak	42	279	Vertical

Table 746 - U-NII-3 - 5745 MHz (CH149), HE20, RU26-0, CDD, Core 0 + Core 1, 1 GHz to 40 GHz

No other emissions found within 10 dB of the limit.

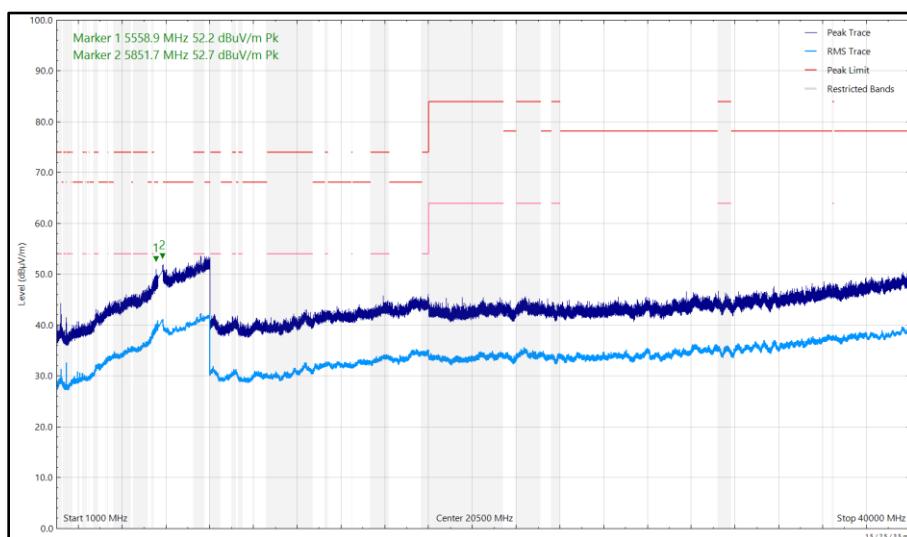


Figure 741 - U-NII-3 - 5745 MHz (CH149), HE20, RU26-0, CDD, Core 0 + Core 1, 1 GHz to 40 GHz, Horizontal

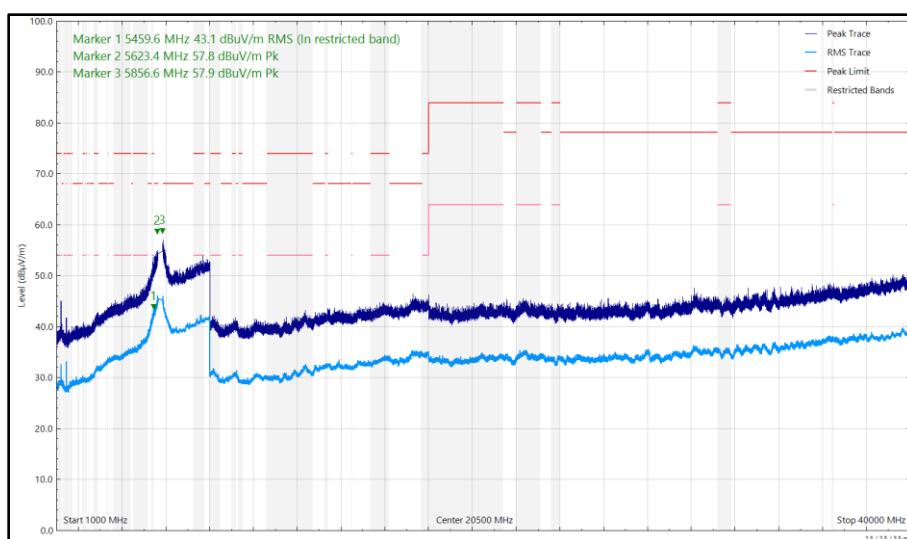


Figure 742 - U-NII-3 - 5745 MHz (CH149), HE20, RU26-0, CDD, Core 0 + Core 1, 1 GHz to 40 GHz, Vertical



Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
30.018	24.43	40.00	-15.57	Q-Peak	195	397	Vertical
32.270	34.21	40.00	-5.79	Q-Peak	254	100	Vertical
90.456	27.28	43.50	-16.22	Q-Peak	360	351	Horizontal
104.375	35.76	43.50	-7.74	Q-Peak	0	291	Horizontal
108.804	34.02	43.50	-9.48	Q-Peak	1	275	Horizontal
113.515	33.22	43.50	-10.28	Q-Peak	283	112	Vertical
146.991	30.42	43.50	-13.08	Q-Peak	308	103	Vertical
149.593	28.94	43.50	-14.56	Q-Peak	186	240	Horizontal
172.985	29.35	43.50	-14.15	Q-Peak	324	107	Vertical
329.368	28.73	46.00	-17.27	Q-Peak	91	102	Horizontal
5146.124	36.88	54.00	-17.12	RMS	332	342	Vertical
5455.990	41.02	54.00	-12.98	RMS	14	286	Vertical
5705.370	58.59	68.20	-9.61	Peak	43	259	Vertical
5712.260	53.91	68.20	-14.29	Peak	292	391	Horizontal
5967.286	56.15	68.20	-12.05	Peak	28	283	Vertical
6000.161	51.85	68.20	-16.35	Peak	290	366	Horizontal

Table 747 - U-NII-3 - 5825 MHz (CH165), HE20, RU26-0, CDD, Core 0 + Core 1, 30 MHz to 40 GHz

No other emissions found within 10 dB of the limit.

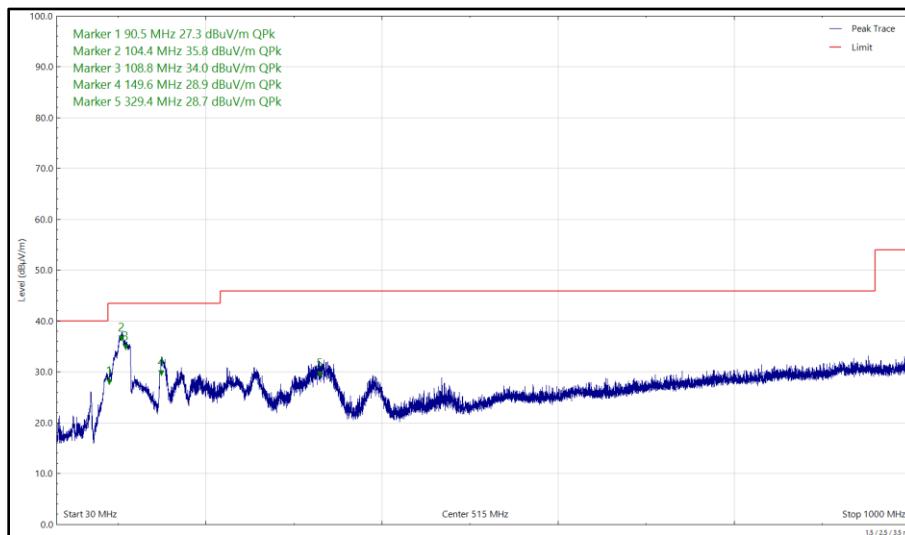


Figure 743 - U-NII-3 - 5825 MHz (CH165), HE20, RU26-0, CDD, Core 0 + Core 1, 30 MHz to 1 GHz, Horizontal (Peak)

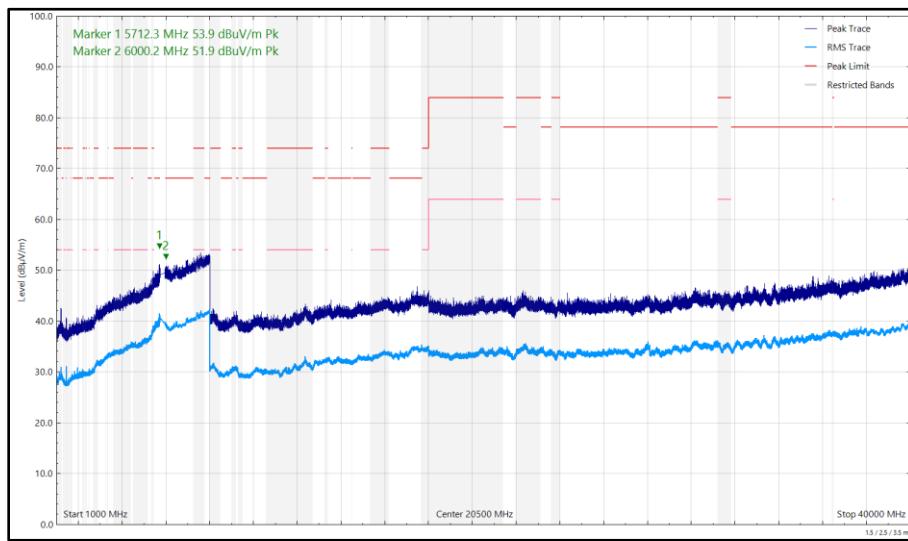


Figure 744 - U-NII-3 - 5825 MHz (CH165), HE20, RU26-0, CDD, Core 0 + Core 1, 1 GHz to 40 GHz, Horizontal

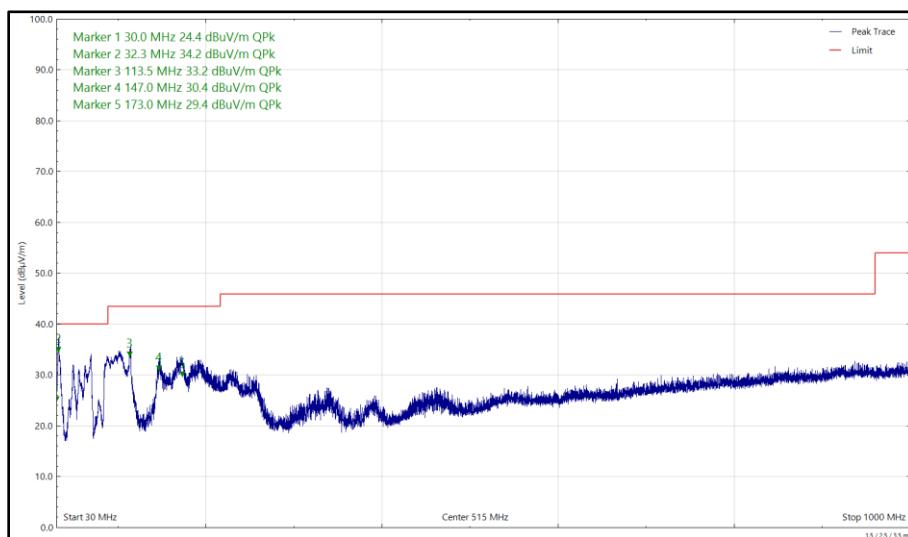


Figure 745 - U-NII-3 - 5825 MHz (CH165), HE20, RU26-0, CDD, Core 0 + Core 1, 30 MHz to 1 GHz, Vertical (Peak)

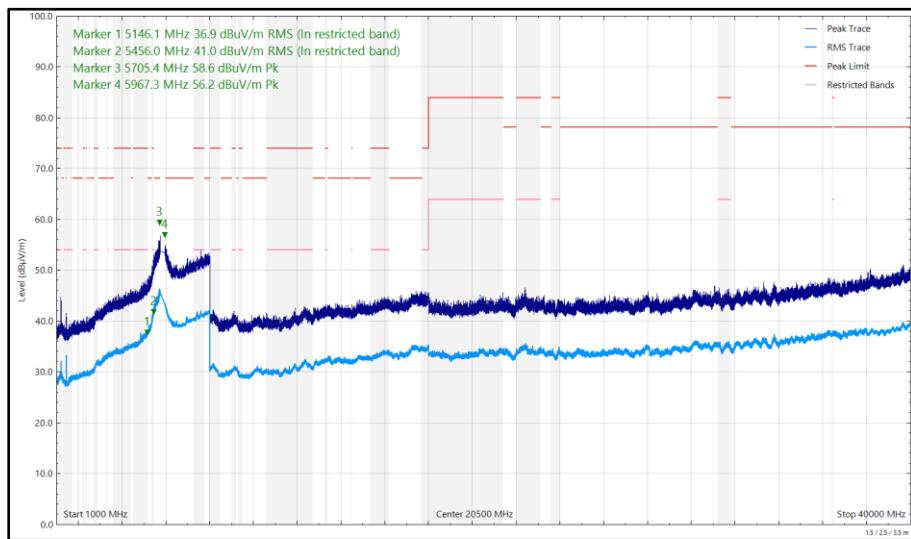


Figure 746 - U-NII-3 - 5825 MHz (CH165), HE20, RU26-0, CDD, Core 0 + Core 1, 1 GHz to 40 GHz, Vertical

FCC 47 CFR Part 15, Limit Clause 15.407(b)(1)(2)(3)(4)

Emissions not falling within the restricted bands listed in FCC 47 CFR Part 15.209:

For transmitters operating in the 5.15-5.25 GHz band: ≤ -27 dBm/MHz outside 5150-5350 MHz.

For transmitters operating in the 5.25-5.35 GHz band: ≤ -27 dBm/MHz outside 5150-5350 MHz.

For transmitters operating in the 5.47-5.725 GHz band: ≤ -27 dBm/MHz outside 5470-5725 MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Emissions within the restricted bands listed in FCC 47 CFR Part 15.209:

Frequency (MHz)	Field Strength (μ V/m) at 3m	Field Strength Limit (μ V/m) at 3m
30 to 88	100	40.00
88 to 216	150	43.52
216 to 960	200	46.02
Above 960	500	53.98

Table 748 - Radiated Emissions Limit Table (FCC)



ISED RSS-247, Limit Clause 6.2.1.2, 6.2.2.2, 6.2.3.2 and 6.2.4.2 and ISED RSS-GEN, Limit Clause 8.9

Emissions not falling within the restricted bands listed in ISED RSS-GEN, Clause 8.10:

For transmitters with operating frequencies in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. Any unwanted emissions that fall into the band 5250-5350 MHz shall be attenuated below the channel power by at least 26 dB.

For transmitters with operating frequencies in the bands 5250-5350 MHz and 5470-5725 MHz, all emissions outside the band 5250-5350 MHz and 5470-5725 MHz shall not exceed -27 dBm/MHz e.i.r.p.

Devices operating in the band 5725-5850 MHz shall have e.i.r.p. of unwanted emissions comply with the following:

- a) 27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edges;
- b) 15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges;
- c) 10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges; and
- d) -27 dBm/MHz at frequencies more than 75 MHz above or below the band edges.

Emissions falling within the restricted bands listed in ISED RSS-GEN, Clause 8.10:

Frequency (MHz)	Field Strength (μ V/m) at 3m	Field Strength Limit ($\text{dB}\mu$ V/m) at 3m
30 to 88	100	40.00
88 to 216	150	43.52
216 to 960	200	46.02
Above 960	500	53.98

Table 749 - Radiated Emissions Limit Table (ISED)

For the 5895 MHz band edge and above, all devices shall be measured using average detection and shall comply with the following e.i.r.p. spectral density limits:

Fixed outdoor access points and fixed outdoor client devices shall not exceed -27 dBm/MHz e.i.r.p. spectral density at or above the 5895 MHz band edge.

Indoor access points or indoor subordinate devices shall not exceed 15 dBm/MHz e.i.r.p. spectral density at the 5895 MHz band edge and shall decrease linearly to not exceed -7 dBm/MHz e.i.r.p. spectral density at or above 5925 MHz.

Client devices shall not exceed -5 dBm/MHz e.i.r.p. spectral density at the 5895 MHz band edge and shall decrease linearly to not exceed -27 dBm/MHz e.i.r.p. spectral density at or above 5925 MHz.



2.6.8 Test Location and Test Equipment Used

This test was carried out in RF Chamber 14, RF Chamber 16 and RF Chamber 17.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Cable (18 GHz)	Rosenberger	LU7-071-1000	5102	12	21-Nov-2024
Emissions Software	TUV SUD	EmX V3.4.2	5125	-	Software
Antenna (DRG, 1 GHz to 10.5 GHz)	Schwarzbeck	BBHA9120B	5215	12	14-Jul-2025
EMI Test Receiver	Rohde & Schwarz	ESW44	5911	12	19-Sep-2025
EMI Test Receiver	Rohde & Schwarz	ESW44	5912	12	07-Aug-2025
TRILOG Super Broadband Test Antenna	Schwarzbeck	VULB 9168	5943	24	24-May-2026
1500W (300V 12A) AC Power Supply	iTech	IT7324	5955	-	O/P Mon
1500W (300V 12A) AC Power Supply	iTech	IT7324	5957	-	O/P Mon
5m Semi-Anechoic Chamber (Dual-Axis)	Albatross Projects	RF Chamber 14	5958	36	26-Apr-2025
Compact Antenna Mast	Maturo GmbH	CAM4.0-P	5959	-	TU
Mast & Turntable Controller	Maturo GmbH	FCU3.0	5960	-	TU
Tilt Antenna Mast	Maturo GmbH	BAM4.5-P	5961	-	TU
Turntable	Maturo GmbH	TT1.5SI	5962	-	TU
3m Semi-Anechoic Chamber, Chamber16	Albatross Projects	RF Chamber 16	5972	36	24-May-2025
Mast & Turntable Controller	Maturo GmbH	FCU3.0	5973	-	TU
Tilt Antenna Mast	Maturo GmbH	BAM4.5-P	5974	-	TU
Turntable	Maturo GmbH	TT1.5SI	5975	-	TU
Cable (N to N 8m)	Junkosha	MWX221-08000NMSNMS/A	6006	12	20-May-2025
Cable (N to N 3m)	Junkosha	MWX221-03000NMSNMS/A	6025	12	20-May-2025
SAC Switch Unit	TUV SUD	TUV_SSU_001	6144	12	11-Dec-2024
Digital Multimeter	Fluke	115	6146	12	06-Jun-2025
Digital Multimeter	Fluke	115	6147	12	06-Jun-2025
Attenuator 4dB	Pasternack	PE7074-4	6201	24	24-May-2026
EMI Test Receiver	Rohde & Schwarz	ESW44	6294	12	06-Jan-2025
USB Spectrum Analyser	Signal Hound	SA124B	6296	-	TU
USB Spectrum Analyser	Signal Hound	SA124B	6298	-	TU
Cable (SMA to SMA 1m)	Junkosha	MWX221-01000AMSAMS/A	6315	12	04-Feb-2025
Cable (K Type 2m)	Junkosha	MWX241-02000KMSKMS/B	6324	12	04-Feb-2025
Digital Multimeter	Fluke	115	6345	12	24-Jul-2025
Humidity and Temperature Meter	R.S Components	1364	6346	12	06-Mar-2025



Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
SAC Switch Unit	TUV SUD	TUV_SSU_004 PLC	6349	12	07-May-2025
USB Spectrum Analyser	Signal Hound	SA124B	6383	-	TU
Horn Antenna (1–10.5 GHz)	Schwarzbeck	BBHA 9120 B	6457	12	05-May-2025
AC Power Supply	iTech	IT7324	6657	-	O/P Mon
3m Semi-Anechoic Chamber	Albatross Projects	RF Chamber 17	6658	36	28-Jan-2026
Mast and Turntable Controller	Maturo GmbH	FCU3.0	6659	-	TU
Tilt Antenna Mast	Maturo GmbH	BAM4.5-P	6660	-	TU
Turntable	Maturo GmbH	TT1.5SI	6661	-	TU
8m Cable	Junkosha	MWX221-08000AMSAMS/B	6748	12	01-Feb-2025
Double Ridge Active Horn Antenna (18-40 GHz)	Com-Power	AHA-840	6771	24	17-Jan-2025
8M SMA Cable	Junkosha	MWX221-08000AMSAMS/B	6834	12	14-Aug-2025
Handheld Hygrometer	Fluke	971	6838	12	27-Aug-2025
Cable Assembly	SpecTech	PE300-60	6857	-	TU
Cable Assembly	SpecTech	PE300-60	6858	-	TU
Cable Assembly	SpecTech	PE300-60	6859	-	TU
Cable Assembly	SpecTech	PE300-60	6860	-	TU
Cable Assembly	SpecTech	PE300-60	6866	-	TU
Cable Assembly	SpecTech	PE300-60	6867	-	TU

Table 750

TU - Traceability Unscheduled

O/P Mon - Output Monitored using calibrated equipment



2.7 Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period

2.7.1 Specification Reference

FCC 47 CFR Part 15E, Clause 15.407 (h)(2)(iii)(iv)
ISED RSS-247, Clause 6.3.2(c)(d)(e)

2.7.2 Equipment Under Test and Modification State

A3240, S/N: KF2C62T3JJ - Modification State 0
A3240, S/N: KT9T1QLT0D - Modification State 0

2.7.3 Date of Test

24-October-2024 to 18-December-2024

2.7.4 Test Method

This test was performed in accordance with FCC KDB 905462 D02, clause 7.8.3.

Radar Pulse Type 0 was then transmitted, and the Spectrum monitored. The transmissions from the UUT were observed for a period of 12 seconds after the final injected Radar Pulse.

It was checked that all transmissions stopped within the 10 second period defined from the point of the end of the final Radar pulse + 10 seconds. In addition, the aggregate on time during the first 200ms and the following 9.8 seconds of the Channel Move Time was computed.

The markers on the trace data correspond to the following time periods:

Yellow - End of Radar Burst, (T0)
Purple - End of Channel Move Time, (T0 + 10 seconds)

To verify the non-occupancy period, the external trigger was used to trigger a 30-minute sweep from the moment the radar burst sequence was injected. It was verified that no transmissions occurred on the test channel during this time period.

2.7.5 Environmental Conditions

Ambient Temperature	22.7 - 23.4 °C
Relative Humidity	42.3 - 50.3 %

2.7.6 Test Results

5 GHz WLAN – Master to Client

The equipment under test was a Client without Radar Detection.

This test was performed in the following mode of operation: 802.11ac VHT80.

The equipment was set up as shown in the diagram below. The test laptop was configured to run iPerf, transmitting UDP data to the EUT via the DFS Master. The channel loading was set to >17% by adjusting the bandwidth specified in the iPerf UDP transfer.

To calibrate the level of the radar at the input to the companion device, the companion device was replaced by the spectrum analyser and the output of the vector signal generator adjusted to give -62 dBm.

Radar Type	Pulse Width (μs)	PRI (μs)	Number of Pulses
0	1	1428	18

Table 751 - Radar Pulse Type 0 Characteristics

Manufacturer	Model	Serial Number	FCC ID
ASUS	GT-AXE11000	M8IG0X400285XVN	MSQ-RTAXJF00

Table 752 - Details of Master Device used to support testing

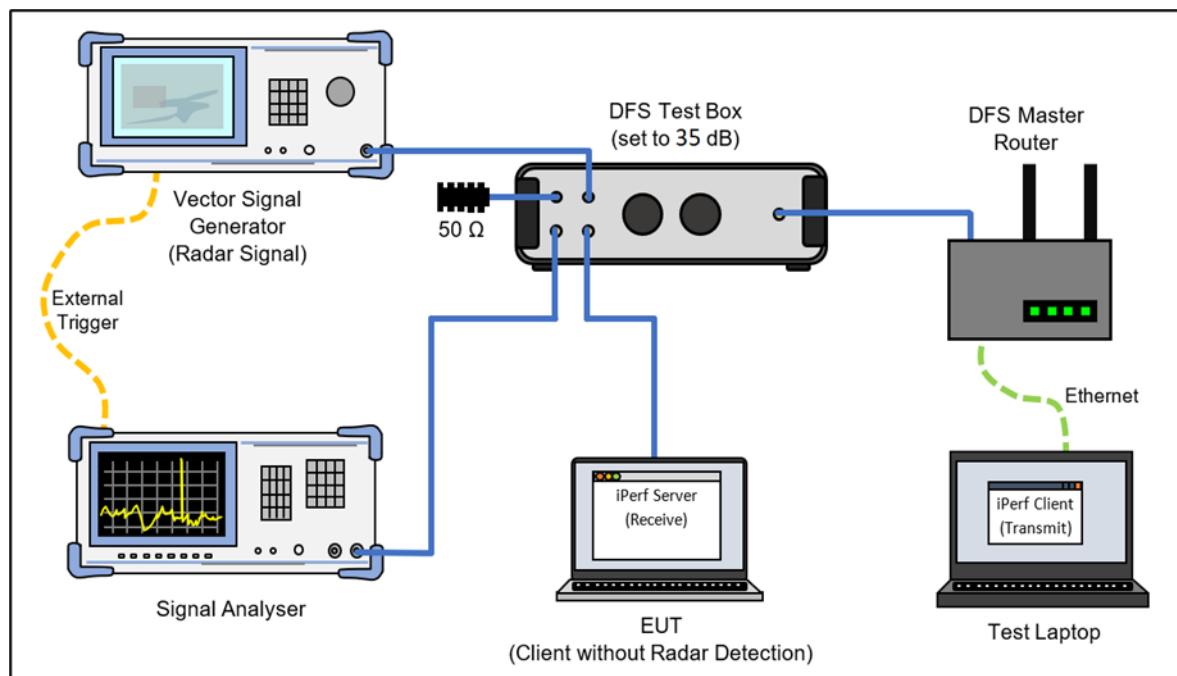


Figure 747 - Test Equipment Setup Diagram for Client without Radar Detection with Injection at the Master

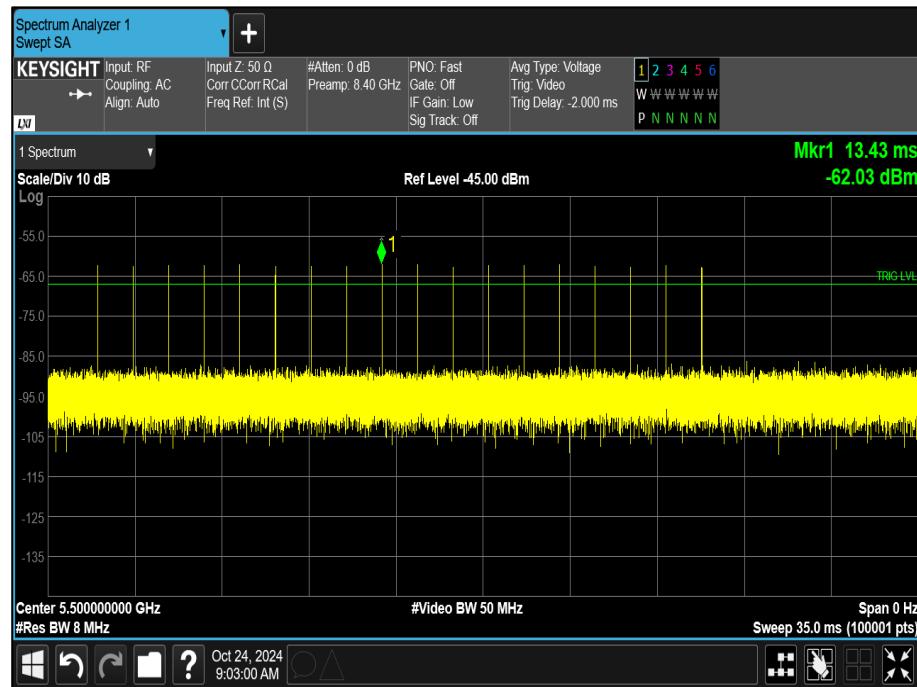


Figure 748 - Verification of Radar Type 0

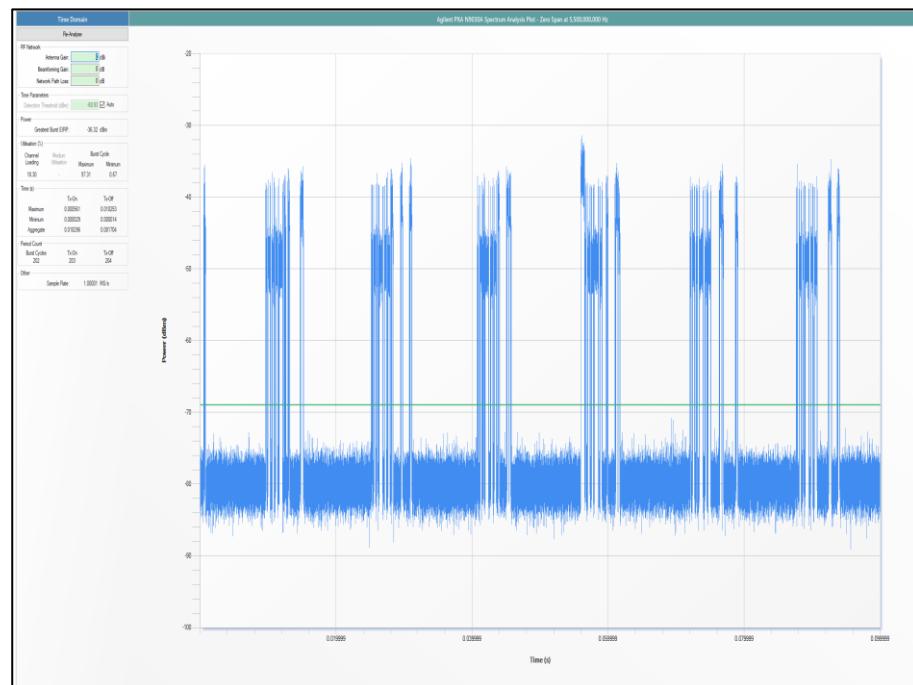


Figure 749 - Channel Loading

The channel loading was 26.71%



Maximum Transmit Power	Value (Notes 1 and 2)
≥ 200 milliwatt	-64 dBm
< 200 milliwatt	-62 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.
Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Table 753 - DFS Detection Thresholds for Master Devices and Client Devices with Radar Detection

Test Parameter	Result
Test Channel	CH114 (5570 MHz), Control CH100 (5500 MHz)
Channel Move Time	0.099 s
Channel Closing Time (Aggregate Time During 200 ms)	19.200 ms
Channel Closing Time (Aggregate Time During 200 ms to 10 s)	0.000 ms
Channel Closing Time (Aggregate Time During 10 s)	19.200 ms
Transmission Observed During Non-Occupancy Period	No

Table 754 - In-Service Monitoring Test Results

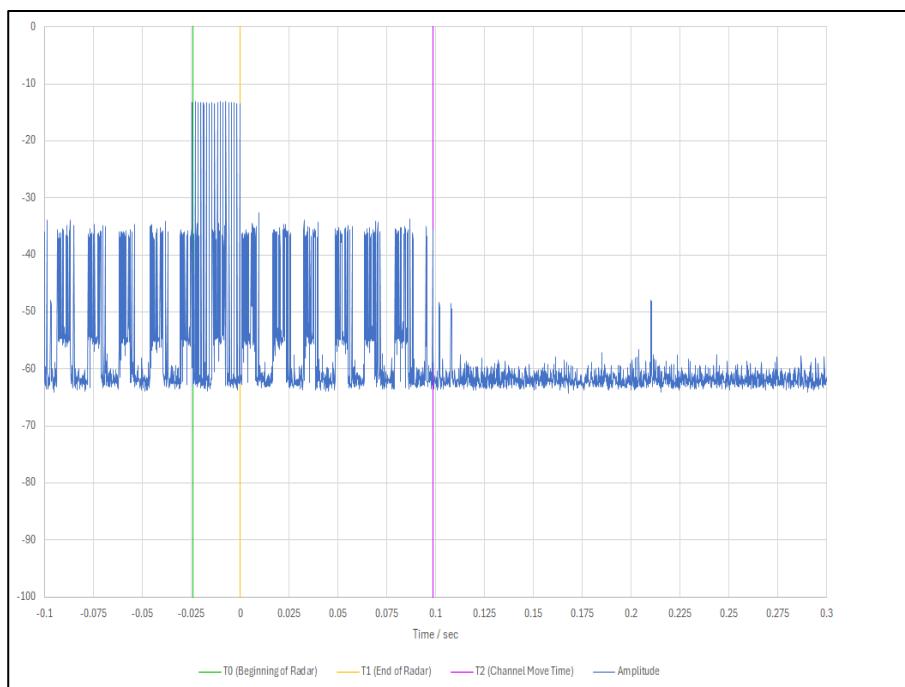


Figure 750 - First 200 ms of Channel Shutdown Period

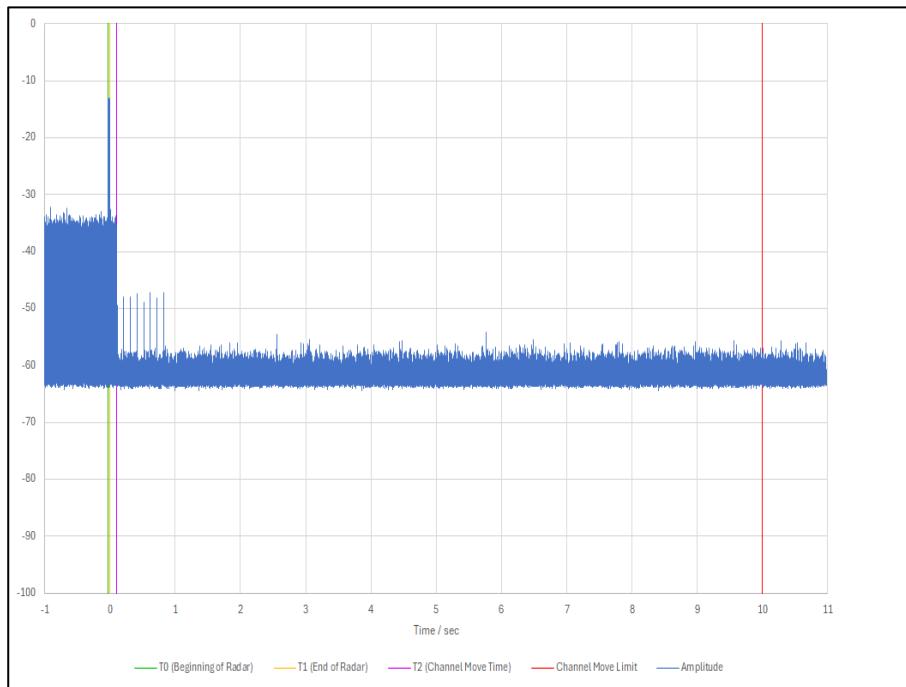


Figure 751 - First 12 s of Channel Shutdown Period

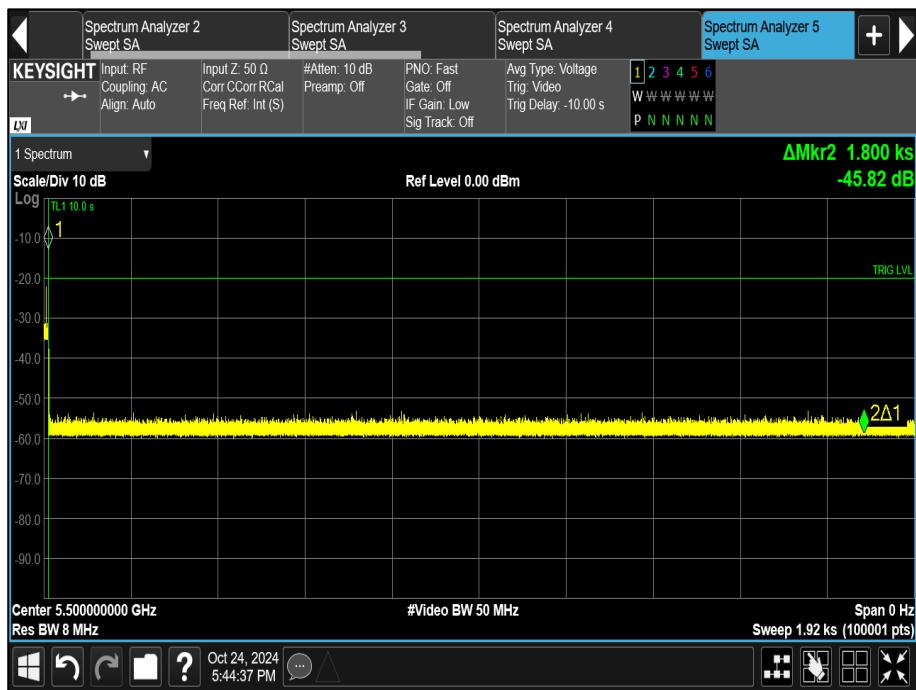


Figure 752 - 30 minute Non-Occupancy Period

5 GHz WLAN - Client to Client

The equipment under test was a Client without Radar Detection.

This test was performed in the following mode of operation: 802.11ac VHT80.

The equipment was set up as shown in the diagram below. The EUT and a 2nd client device were both connected to the DFS Master device. The 2nd client device was set to stream video directly to the EUT using the AirPlay protocol, while under the supervision of the DFS master (but without the DFS master re-transmitting the data packets). The channel loading was checked to ensure it was >17%.

To calibrate the level of the radar at the input to the DFS Master, the DFS Master device was replaced by the spectrum analyser and the output of the vector signal generator adjusted to give -62 dBm.

Radar Type	Pulse Width (μs)	PRI (μs)	Number of Pulses
0	1	1428	18

Table 755 - Radar Pulse Type 0 Characteristics

Manufacturer	Model	Serial Number	FCC ID
ASUS	GT-AXE11000	N5IGOX400280MY7	MSQ-RTAXJF00

Table 756 - Details of Master Device used to support testing

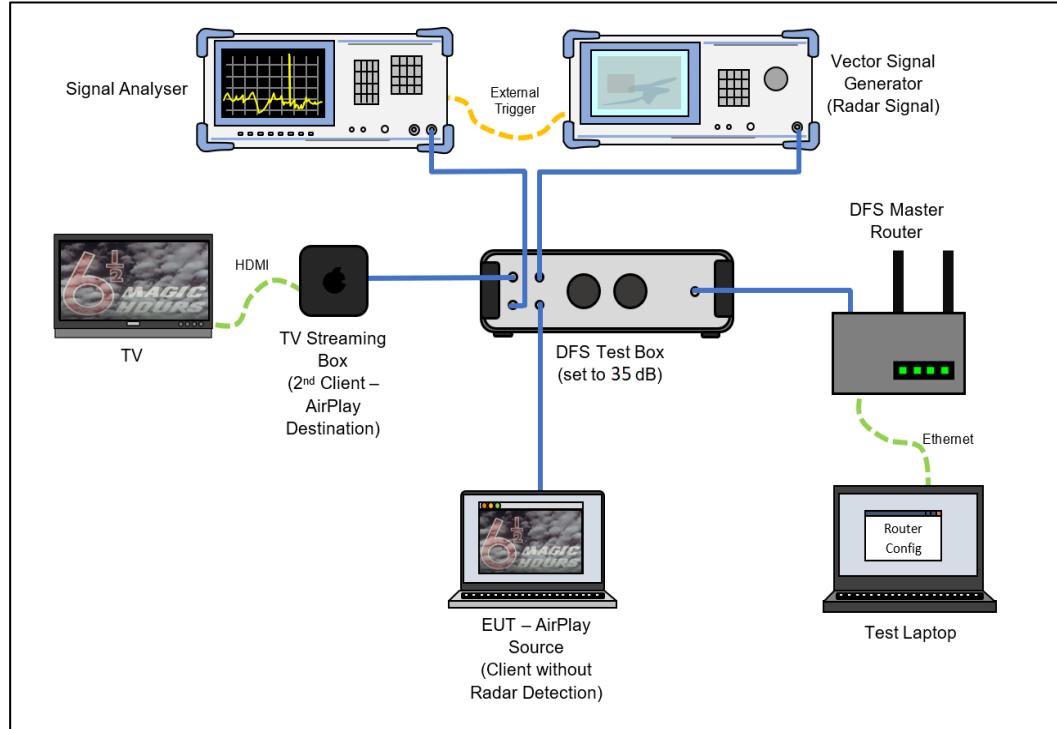


Figure 753 - Test Equipment Setup Diagram for Client without Radar Detection with Injection at the Master

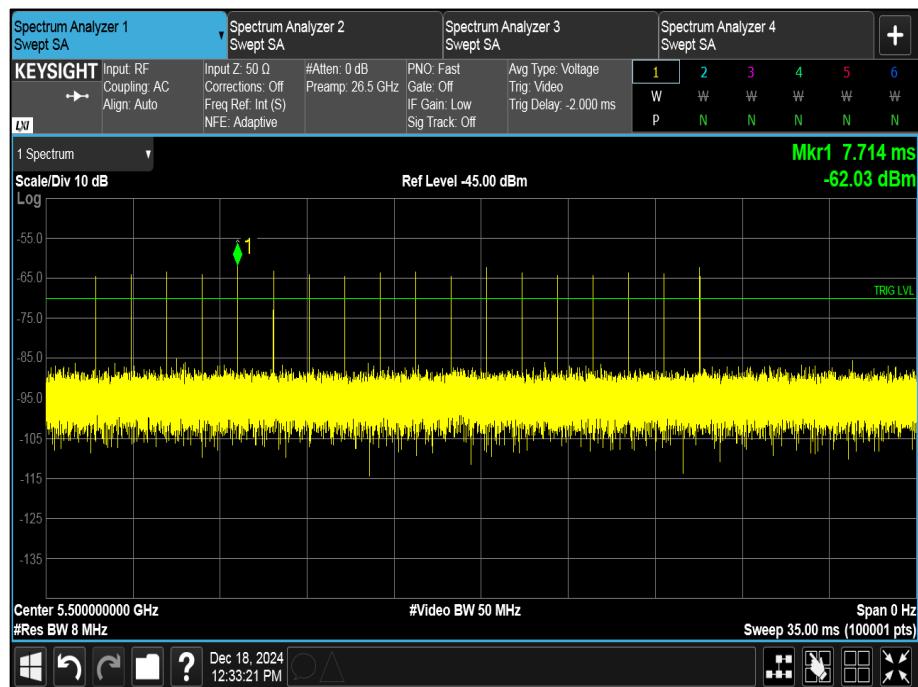


Figure 754 - Verification of Radar Type 0

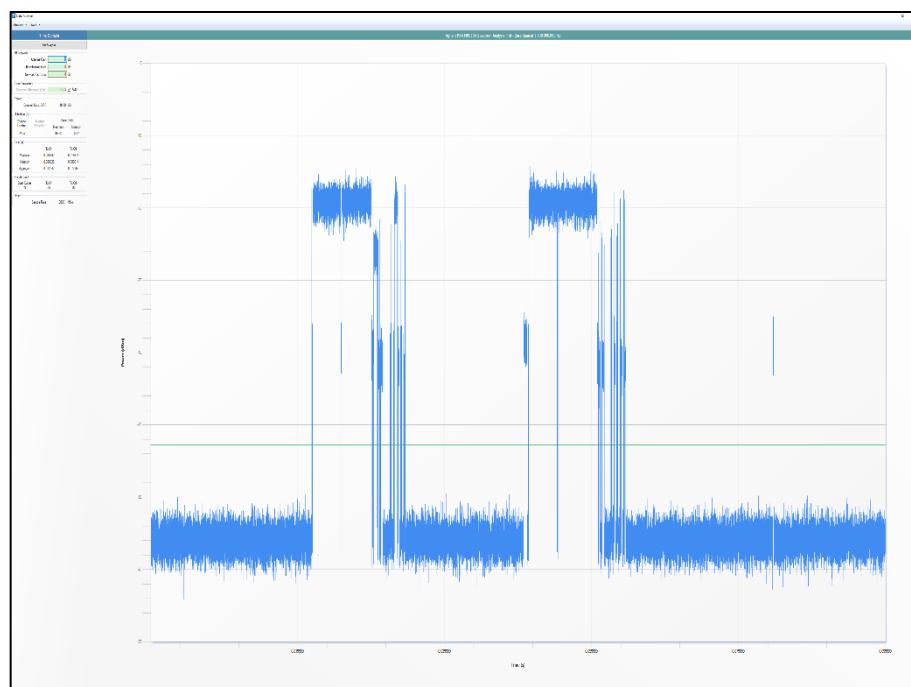


Figure 755 - Channel Loading

The channel loading was 22.25%



Maximum Transmit Power	Value (Notes 1 and 2)
≥ 200 milliwatt	-64 dBm
< 200 milliwatt	-62 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.
Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Table 757 - DFS Detection Thresholds for Master Devices and Client Devices with Radar Detection

Test Parameter	Result
Test Channel	CH106 (5530 MHz), Control CH100 (5500 MHz)
Channel Move Time	0.071 s
Channel Closing Time (Aggregate Time During 200 ms)	30.000 ms
Channel Closing Time (Aggregate Time During 200 ms to 10 s)	0.000 ms
Channel Closing Time (Aggregate Time During 10 s)	30.000 ms
Transmission Observed During Non-Occupancy Period	No

Table 758 - In-Service Monitoring Test Results

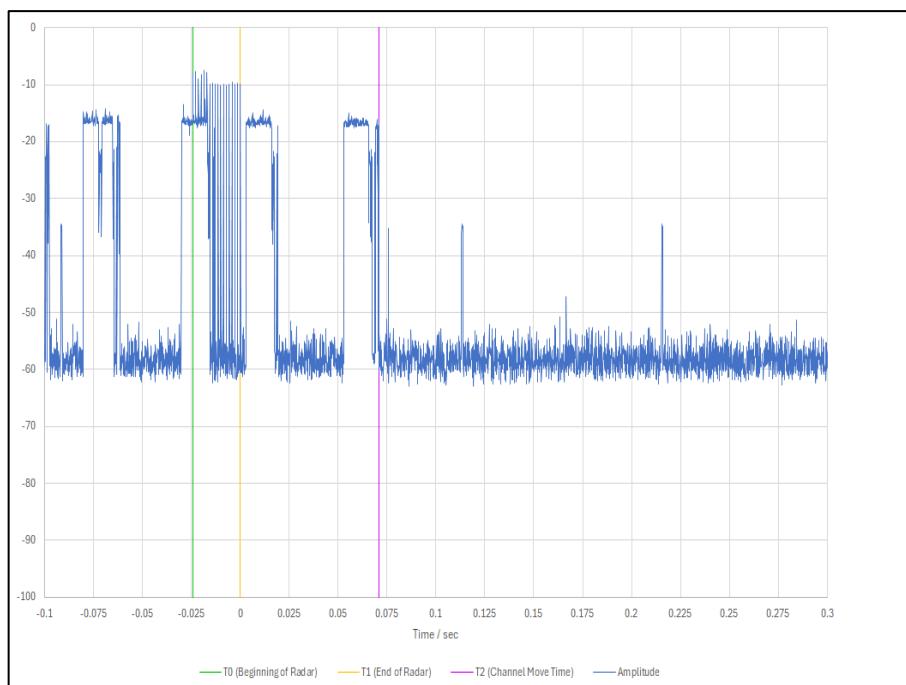


Figure 756 - First 200 ms of Channel Shutdown Period

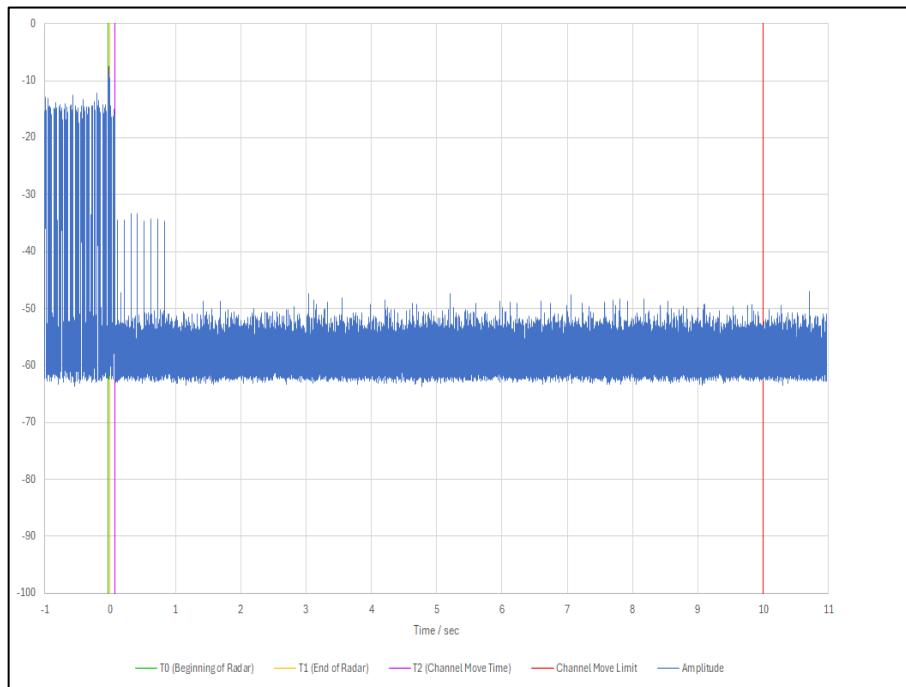


Figure 757 - First 12 s of Channel Shutdown Period

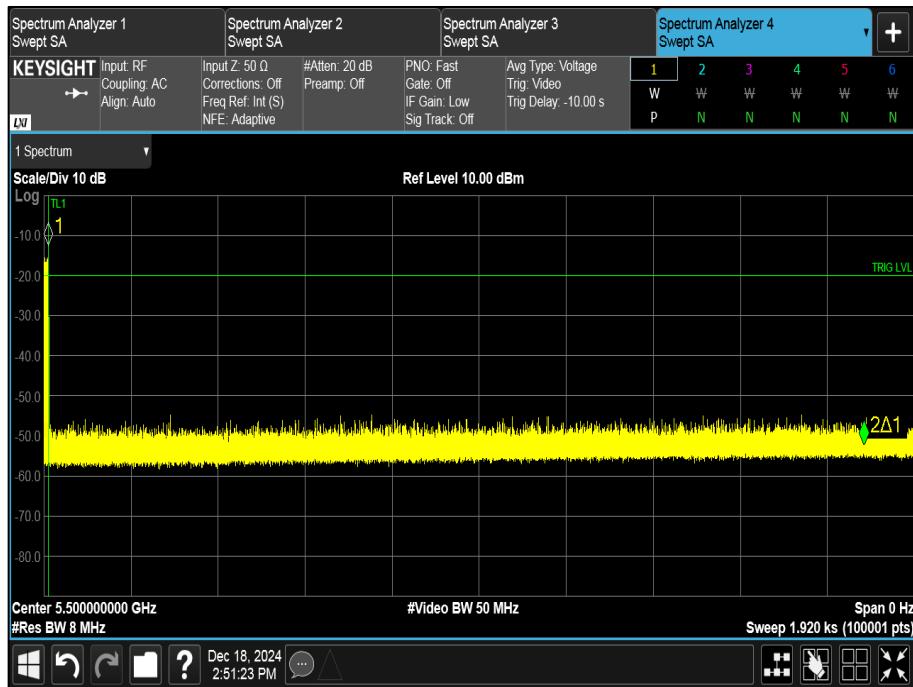


Figure 758 - 30 minute Non-Occupancy Period



FCC 47 CFR Part 15, Limit Clause 15.407 (h)(2)(iii)

Channel Move Time	<10 seconds
Channel Closing Time (Aggregate Time During 200ms)	<200 ms
Channel Closing Time (Aggregate Time During +200ms to 10s)	<60 ms

Table 759 - Channel Move Time and Channel Closing Transmission Time Limit

FCC 47 CFR Part 15, Limit Clause 15.407 (h)(2)(iv)

Non-occupancy Period	> 30 minutes
----------------------	--------------

Table 760 - Non-Occupancy Limit

ISED RSS-247, Limit Clause 6.3.2

Devices shall comply with the following requirements, however, the requirement for in-service monitoring does not apply to slave devices without radar detection.

In-service monitoring: an LE-LAN device shall be able to monitor the operating channel to check that a co-channel radar has not moved or started operation within range of the LE-LAN device. During in-service monitoring, the LE-LAN radar detection function continuously searches for radar signals between normal LE-LAN transmissions.

Channel availability check time: the device shall check whether there is a radar system already operating on the channel before it initiates a transmission on a channel and when it moves to a channel. The device may start using the channel if no radar signal with a power level greater than the interference threshold value specified in Section 6.3.1 above is detected within 60 seconds. This requirement only applies in the master operational mode.

Channel move time: after a radar signal is detected, the device shall cease all transmissions on the operating channel within 10 seconds.

Channel closing transmission time: is comprised of 200 ms starting at the beginning of the channel move time plus any additional intermittent control signals required to facilitate a channel move (an aggregate of 60 ms) over the remaining 10-second period of the channel move time.

Non-occupancy period: a channel that has been flagged as containing a radar signal, either by a channel availability check or in-service monitoring, is subject to a 30-minute non-occupancy period where the channel cannot be used by the LE-LAN device. The non-occupancy period starts from the time that the radar signal is detected.



2.7.7 Test Location and Test Equipment Used

This test was carried out in Shielded Laboratory 1.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
EXA Signal Analyser	Keysight Technologies	N9010B	4968	24	29-Jan-2026
3.5 mm 1m Cable	Junkosha	MWX221-01000DMS	5416	12	07-Mar-2025
3.5 mm 2m Cable	Junkosha	MWX221-02000DMS	5426	12	16-May-2025
3.5 mm 2m Cable	Junkosha	MWX221-02000DMS	5427	12	23-May-2025
3.5 mm 2m Cable	Junkosha	MWX221-02000DMS	5429	12	16-May-2025
3.5 mm 2m Cable	Junkosha	MWX221-02000DMS	5430	12	16-May-2025
3.5mm Cable (1m)	Junkosha	MWX221/B	5837	12	29-Jul-2025
Vector Signal Generator	Rohde & Schwarz	SMM100A	5915	36	01-Mar-2026
WiFi 6E Tri-Band Gaming Router	Asus	GT-AXE110000	5926	-	TU
Cable (K Type 2m)	Junkosha	MWX241-02000KMSKMS/B	5936	12	23-May-2025
Cable (K Type 2m)	Junkosha	MWX241-02000KMSKMS/B	5938	12	23-May-2025
WiFi 6E Tri-Band Gaming Router	Asus	GT-AXE110000	6251	-	TU
Thermohygrometer	R.S Components	1364	6352	12	13-Jun-2025
Test Coupling Network	TUV SUD	TUV_RxTest_001	6387	12	06-Sep-2025
2m Coaxial Cable Assy	Junkosha	MWX221-02000NMSNMS/A	6414	-	O/P Mon
MXA Signal Analyzer	Keysight Technologies	N9020B	6415	24	22-Mar-2025
Test Coupling Network	TUV SUD	TUV_RxTest_001	6441	12	30-Apr-2025
Vector Signal Generator (7.5GHz)	Rohde & Schwarz	SMM100A	6532	36	11-Apr-2026

Table 761

TU - Traceability Unscheduled

3 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

Test Name	Measurement Uncertainty
Restricted Band Edges	± 6.3 dB
Emission Bandwidth	± 3.914 MHz
Maximum Conducted Output Power	± 1.38 dB
Maximum Conducted Power Spectral Density	± 1.49 dB
Authorised Band Edges	± 6.3 dB
Spurious Radiated Emissions	30 MHz to 1 GHz: ± 5.2 dB 1 GHz to 40 GHz: ± 6.3 dB
Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period	Time: ± 0.47 % Power: ± 1.29 dB

Table 762

Measurement Uncertainty Decision Rule – Accuracy Method

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115:2021, Clause 4.4.3 (Procedure 2). The measurement results are directly compared with the test limit to determine conformance with the requirements of the standard.

Risk: The uncertainty of measurement about the measured result is negligible with regard to the final pass/fail decision. The measurement result can be directly compared with the test limit to determine conformance with the requirement (compare IEC Guide 115). The level of risk to falsely accept and falsely reject items is further described in ILAC-G8.