

FCC and ISED Test Report

Apple Inc
Model: A3240



In accordance with FCC 47 CFR Part 15C,
ISED RSS-247 and ISED RSS-GEN
(Thread)

Prepared for: Apple Inc
One Apple Park Way
Cupertino
California
95014
USA

FCC ID: BCGA3240

IC: 579C-A3240

COMMERCIAL-IN-CONFIDENCE

Document 75962766-16 Issue 01

SIGNATURE

NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
James O'Reilly	RF Engineer	Authorised Signatory	06 December 2024

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD document control rules.

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15C, ISED RSS-247 and ISED RSS-GEN. The sample tested was found to comply with the requirements defined in the applied rules.

RESPONSIBLE FOR	NAME	DATE	I
Report Generation	Lauren Walters	06 December 2024	

FCC Accreditation
553713/UK2026 Concorde Park, Fareham Test Laboratory

ISED Accreditation
28798/UK0003 Concorde Park, Fareham Test Laboratory

EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with FCC 47 CFR Part 15C: 2023, ISED RSS-247: Issue 3 (2023-08) and ISED RSS-GEN: Issue 5 (2018-04) + A2 (2021-02) for the tests detailed in section 1.3.



DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD. No part of this document may be reproduced without the prior written approval of TÜV SÜD. © 2024 TÜV SÜD. This report relates only to the actual item/items tested.

ACCREDITATION

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation. Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited). Results of tests covered by our Flexible UKAS Accreditation Schedule are marked FS (Flexible Scope).

TÜV SÜD
is a trading name of TÜV SÜD Ltd
Registered in Scotland at East Kilbride,
Glasgow G75 0QF, United Kingdom
Registered number: SC215164

TÜV SÜD Ltd is a
TÜV SÜD Group Company

Phone: +44 (0) 1489 558100
Fax: +44 (0) 1489 558101
www.tuvsud.com/en

TÜV SÜD
Octagon House
Concorde Way
Fareham
Hampshire PO15 5RL
United Kingdom



Contents

1	Report Summary	2
1.1	Report Modification Record.....	2
1.2	Introduction.....	2
1.3	Brief Summary of Results	3
1.4	Product Information	4
1.5	Deviations from the Standard.....	4
1.6	Identification of the EUT	5
1.7	EUT Modification Record	5
1.8	Test Location	6
2	Test Details	7
2.1	Restricted Band Edges.....	7
2.2	Emission Bandwidth	14
2.3	Maximum Conducted Output Power	24
2.4	Authorised Band Edges	30
2.5	Spurious Radiated Emissions	36
2.6	Power Spectral Density	57
3	Measurement Uncertainty	61



1 Report Summary

1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
1	First Issue	06-Dec-2024

Table 1

1.2 Introduction

Applicant	Apple Inc
Manufacturer	Apple Inc
EUT/Sample Identification	Refer to section 1.6
Test Specification/Issue/Date	FCC 47 CFR Part 15C: 2023 ISED RSS-247: Issue 3 (2023-08) ISED RSS-GEN: Issue 5 (2018-04) + A2 (2021-02)
Start of Test	01-October-2024
Finish of Test	25-November-2024
Name of Engineer(s)	Ahmed Al Derdiri, Mahmud Bari Chowdhury, Ian Hart, Manohar Thota and Morsalin Hossain
Related Document(s)	ANSI C63.10 (2020)



1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15C, ISSED RSS-247 and ISSED RSS-GEN is shown below.

Section	Specification Clause			Test Description	Result	Comments/Base Standard
	Part 15C	RSS-247	RSS-GEN			
Configuration and Mode: Thread						
-	15.203	-	-	Antenna Requirement	N/T	The device complies with the provisions of this section, as it uses permanently attached integral antennas.
2.1	15.205	3.3	8.10	Restricted Band Edges	Pass	ANSI C63.10 (2020)
2.2	15.247 (a)(2)	5.2	6.7	Emission Bandwidth	Pass	ANSI C63.10 (2020)
2.3	15.247 (b)	5.4	6.12	Maximum Conducted Output Power	Pass	ANSI C63.10 (2020)
2.4	15.247 (d)	5.5	-	Authorised Band Edges	Pass	ANSI C63.10 (2020)
2.5	15.209 and 15.247 (d)	3.3 and 5.5	6.13 and 8.9	Spurious Radiated Emissions	Pass	ANSI C63.10 (2020)
2.6	15.247 (e)	5.2	6.12	Power Spectral Density	Pass	ANSI C63.10 (2020)

Table 2



1.4 Product Information

1.4.1 Technical Description

The equipment under test (EUT) was a portable laptop computer.

1.4.2 Test Modes

The EUT's 2.4 GHz Thread radio supports SISO operation on two different cores. It also operates at two power settings: low power "iPA" and high power "ePA". Thread operation does not support any MIMO modes.

The EUT uses the same output power per core for each power setting, but the antenna gains vary, resulting in a different radiated power per core.

The EUT was tested in the following modes:

SISO modes:

- iPA - Core 0
- iPA - Core 1
- ePA - Core 0
- ePA - Core 1

1.4.3 Test Setup

For conducted tests the EUT antennas were disconnected and replaced with U. FL to SMA test cables to enable conducted testing on each core. The loss of these test cables were known and compensated for in any conducted measurements.

For all tests the EUT was put into a continuous transmit test mode with the chipset manufacturer's test commands to ensure the measured signals were representative.

All testing was performed with the EUT powered via a 120 V AC, 60 Hz source.

1.4.4 Antenna Gain Table

Antenna Port	Frequency Range (MHz)	Peak Gain (dBi)	Conducted Cable Loss (dB)
Core 0	2400 to 2480	5.7	0.71
Core 1	2400 to 2480	4.8	0.71

Table 3

1.5 Deviations from the Standard

No deviations from the applicable test standard were made during testing.



1.6 Identification of the EUT

The table below details identification of the EUT(s) that have been used to carry out the testing within this report.

Model: A3240		
Serial Number	Hardware Version	Software Version
K4L392N93P	REV1.0	24A12461c
H2XGP4VW6W	REV1.0	24A12461c
GVGH0F77DG	REV1.0	24A12461c

Table 4

1.7 EUT Modification Record

The table below details modifications made to the EUT during the test programme.

The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
Model: A3240, Serial Number: K4L392N93P			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A3240, Serial Number: H2XGP4VW6W			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A3240, Serial Number: GVGH0F77DG			
0	As supplied by the customer	Not Applicable	Not Applicable

Table 5



1.8 Test Location

TÜV SÜD conducted the following tests at our Concorde Park Test Laboratory.

Test Name	Name of Engineer(s)	Accreditation
Configuration and Mode: Thread		
Restricted Band Edges	Ahmed Al Derdiri	UKAS
Emission Bandwidth	Mahmud Bari Chowdhury	UKAS
Maximum Conducted Output Power	Mahmud Bari Chowdhury	UKAS
Authorised Band Edges	Ahmed Al Derdiri	UKAS
Spurious Radiated Emissions	Ian Hart, Manohar Thota and Morsalin Hossain	UKAS
Power Spectral Density	Mahmud Bari Chowdhury	UKAS

Table 6

Office Address:

TÜV SÜD
Concorde Park
Concorde Way
Fareham
Hampshire
PO15 5FG
United Kingdom



2 Test Details

2.1 Restricted Band Edges

2.1.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.205
ISED RSS-247, Clause 3.3
ISED RSS-GEN, Clause 8.10

2.1.2 Equipment Under Test and Modification State

A3240, S/N: H2XGP4VW6W - Modification State 0

2.1.3 Date of Test

01-October-2024

2.1.4 Test Method

This test was performed in accordance with ANSI C63.10, clause 6.10.5 and 11.12.1.

Plots for average measurements were taken in accordance with ANSI C63.10, clause 11.12.2.5.2.

The following conversion can be applied to convert from dB μ V/m to μ V/m:
 $10^{(\text{Field Strength in dB}\mu\text{V/m}/20)}$.

2.1.5 Environmental Conditions

Ambient Temperature	23.1 °C
Relative Humidity	59.3 %


2.1.6 Test Results

Thread


iPA - Core 0 (SISO)

Mode	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
Thread	2405	2390	55.11	42.67
Thread	2475	2483.5	53.49	41.63

Table 7 - iPA, Core 0, SISO Restricted Band Edge Results

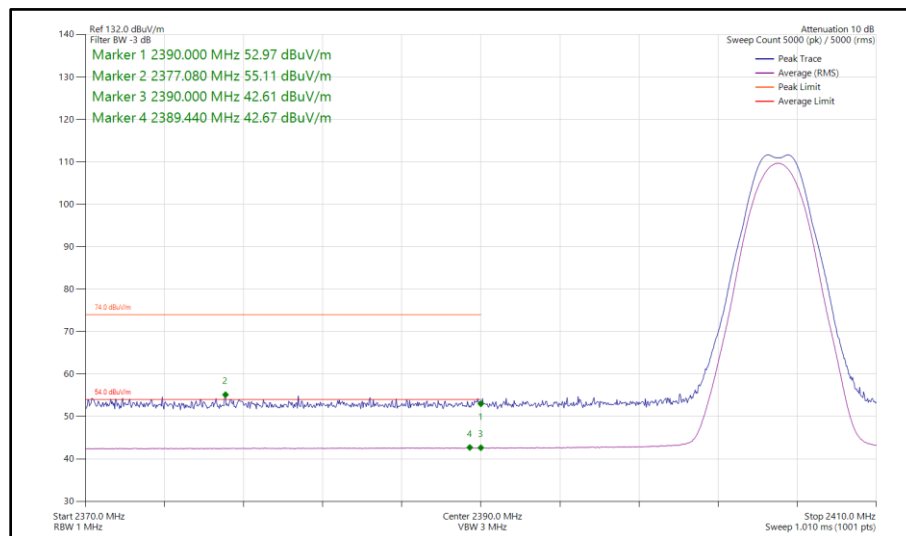

**Figure 1 - Thread, iPA, SISO, Core 0 - 2405 MHz
Band Edge Frequency 2390 MHz**

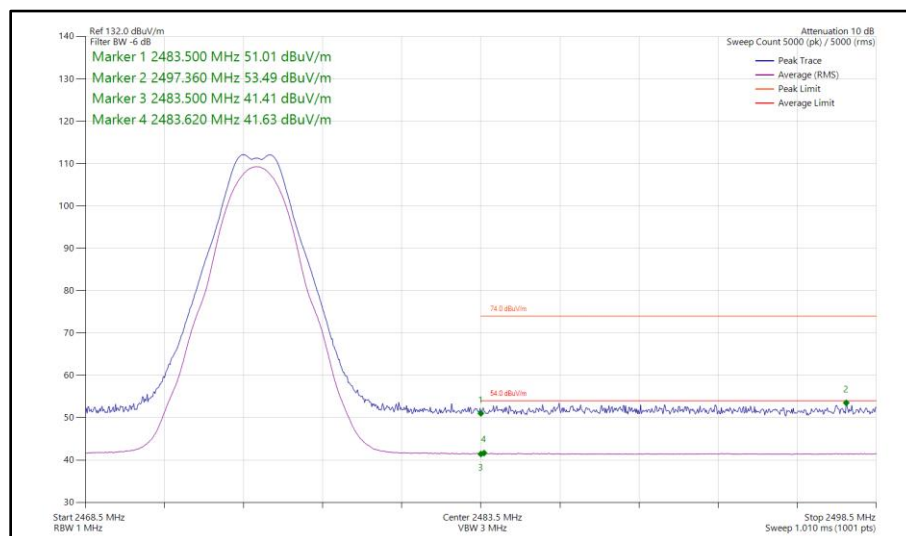


**Figure 2 - Thread, iPA, SISO, Core 0 - 2475 MHz
Band Edge Frequency 2483.5 MHz**


iPA - Core 1 (SISO)

Mode	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
Thread	2405	2390	54.18	42.57
Thread	2475	2483.5	53.49	41.57

Table 8 - iPA, Core 1, SISO Restricted Band Edge Results

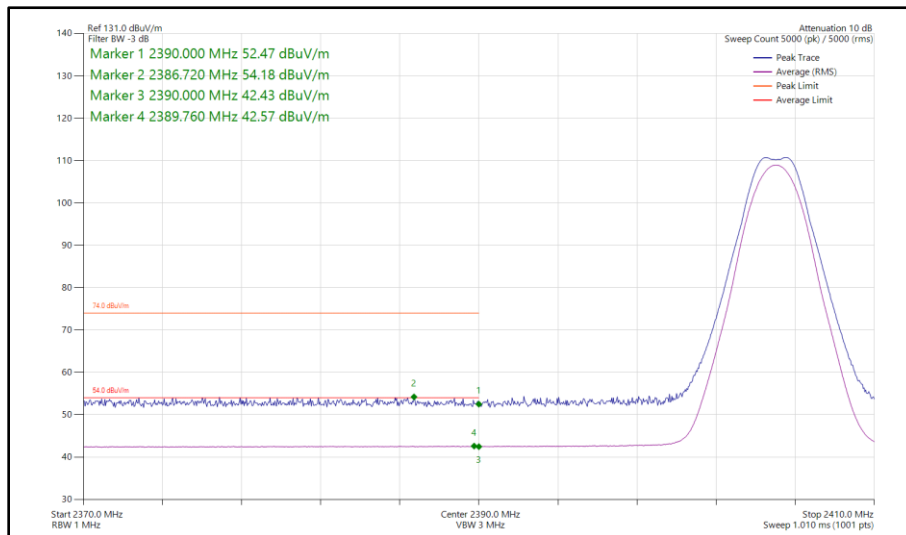

**Figure 3 - Thread, iPA, SISO, Core 1 - 2405 MHz
Band Edge Frequency 2390 MHz**

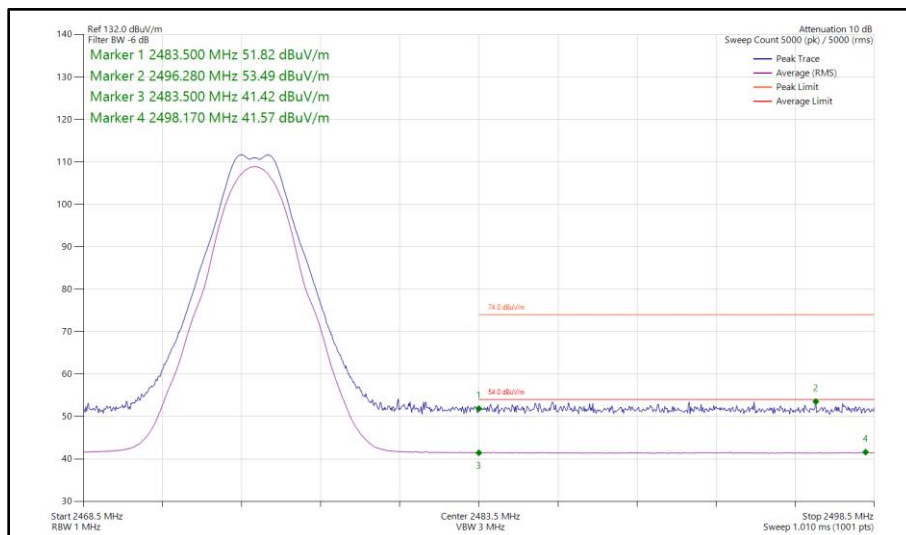


**Figure 4 - Thread, iPA, SISO, Core 1 - 2475 MHz
Band Edge Frequency 2483.5 MHz**


ePA - Core 0 (SISO)

Mode	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
Thread	2405	2390	57.69	46.07
Thread	2475	2483.5	56.15	44.50

Table 9 - ePA, Core 0, SISO Restricted Band Edge Results

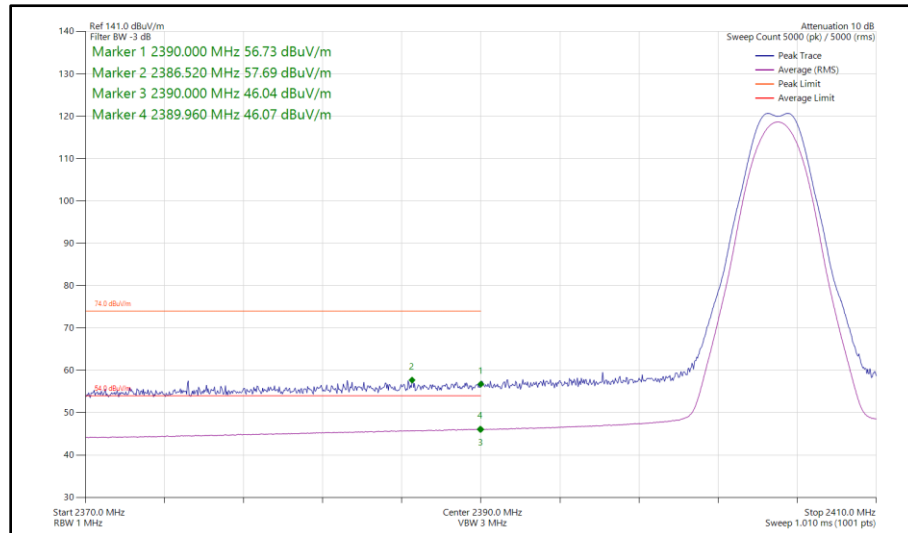

**Figure 5 - Thread, ePA, SISO, Core 0 - 2405 MHz
Band Edge Frequency 2390 MHz**

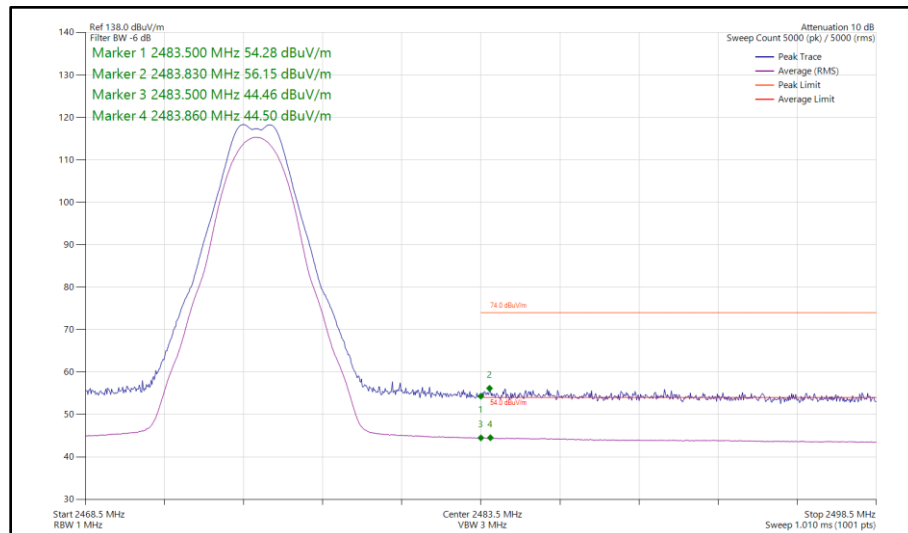


**Figure 6 - Thread, ePA, SISO, Core 0 - 2475 MHz
Band Edge Frequency 2483.5 MHz**


ePA - Core 1 (SISO)

Mode	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
Thread	2405	2390	55.95	44.70
Thread	2475	2483.5	56.89	44.84

Table 10 - ePA, Core 1, SISO Restricted Band Edge Results

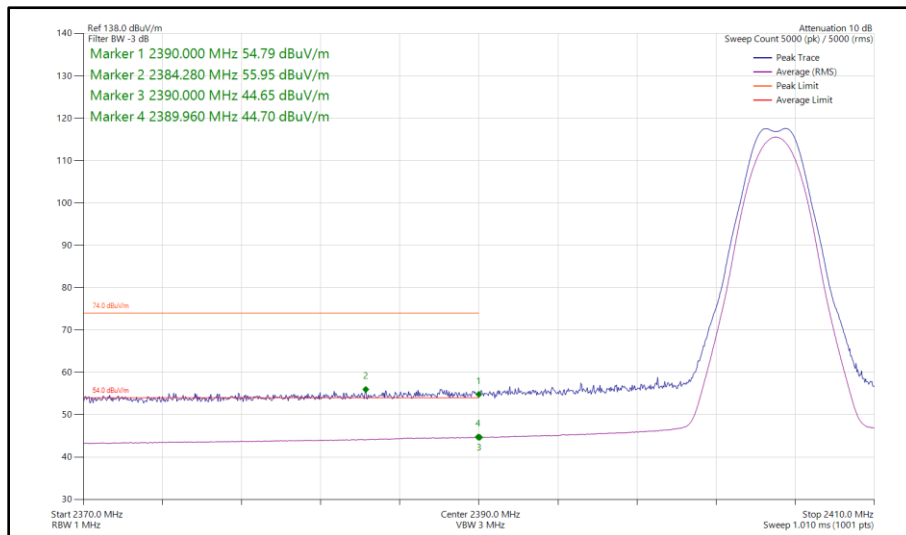

**Figure 7 - Thread, ePA, SISO, Core 1 - 2405 MHz
Band Edge Frequency 2390 MHz**

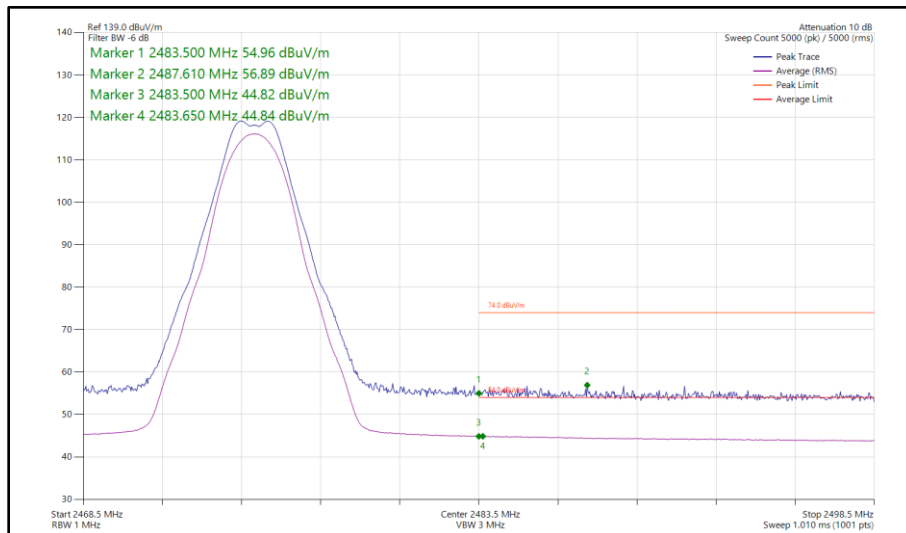

**Figure 8 - Thread, ePA, SISO, Core 1 - 2475 MHz
Band Edge Frequency 2483.5 MHz**



FCC 47 CFR Part 15, Limit Clause 15.209

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$ at 3 m)
30 to 88	100
88 to 216	150
216 to 960	200
Above 960	500

Table 11

ISED RSS-GEN, Limit Clause 8.9

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$ at 3 m)
30 to 88	100
88 to 216	150
216 to 960	200
Above 960*	500

Table 12

*Unless otherwise specified, for all frequencies greater than 1 GHz, the radiated emission limits for licence-exempt radio apparatus stated in applicable RSSs (including RSS-Gen) are based on measurements using a linear average detector function having a minimum resolution bandwidth of 1 MHz. If an average limit is specified for the EUT, then the peak emission shall also be measured with instrumentation properly adjusted for such factors as pulse desensitization to ensure the peak emission is less than 20 dB above the average limit.



2.1.7 Test Location and Test Equipment Used

This test was carried out in RF Chamber 17.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Cable (18 GHz)	Rosenberger	LU7-071-1000	5102	12	21-Nov-2024
Emissions Software	TUV SUD	EmX V3.4.2	5125	-	Software
Cable 2.92m	Junkosha	MWX241-01000KMS	5413	12	23-May-2025
Horn Antenna (1-10 GHz)	Schwarzbeck	BBHA9120B	6142	12	05-May-2025
EMI Test Receiver	Rohde & Schwarz	ESW44	6294	12	06-Jan-2025
USB Spectrum Analyser	Signal Hound	SA124B	6298	-	TU
Digital Multimeter	Fluke	115	6345	12	24-Jul-2025
Humidity and Temperature Meter	R.S Components	1364	6346	12	06-Mar-2025
SAC Switch Unit	TUV SUD	TUV_SSU_004 PLC	6349	12	07-May-2025
Horn Antenna (1–10.5 GHz)	Schwarzbeck	BBHA 9120 B	6457	12	05-May-2025
AC Power Supply	iTech	IT7324	6657	-	O/P Mon
3m Semi-Anechoic Chamber	Albatross Projects	RF Chamber 17	6658	36	28-Jan-2026
Mast and Turntable Controller	Maturo Gmbh	FCU3.0	6659	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	6660	-	TU
Turntable	Maturo Gmbh	TT1.5SI	6661	-	TU
8m Cable	Junkosha	MWX221-08000AMSAMS/B	6748	12	01-Feb-2025
8M SMA Cable	Junkosha	MWX221-08000AMSAMS/B	6833	12	14-Aug-2025
Cable Assembly	SpecTech	PE300-60	6859	-	TU
Cable Assembly	SpecTech	PE300-60	6860	-	TU

Table 13

TU - Traceability Unscheduled

O/P Mon - Output Monitored using calibrated equipment



2.2 Emission Bandwidth

2.2.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (a)(2)
ISED RSS-247, Clause 5.2
ISED RSS-GEN, Clause 6.7

2.2.2 Equipment Under Test and Modification State

A3240, S/N: GVGH0F77DG - Modification State 0

2.2.3 Date of Test

25-November-2024

2.2.4 Test Method

This test was performed in accordance with ANSI C63.10, clause 11.8.1 for 6 dB BW and 6.9.3 for 99% occupied bandwidth measurements.

2.2.5 Environmental Conditions

Ambient Temperature	22.5 °C
Relative Humidity	54.5 %



2.2.6 Test Results

Thread

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 5.2 a)	Test Method(s):	C63.10 6.9.3 C63.10 11.8.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	Thread iPA	Duty Cycle (%):	-
Data Rate:	-	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2405	1.600	-	-	-	≥500.0
2440	1.600	-	-	-	≥500.0
2475	1.600	-	-	-	≥500.0

Table 14 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2405	2.330	-	-	-	-
2440	2.340	-	-	-	-
2475	2.340	-	-	-	-

Table 15 - 99% Bandwidth Results

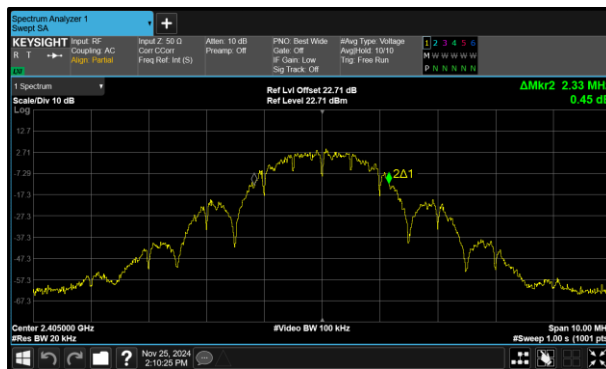


Figure 9 - Core 0 (A) 2405 MHz (CH11) 99% Bandwidth

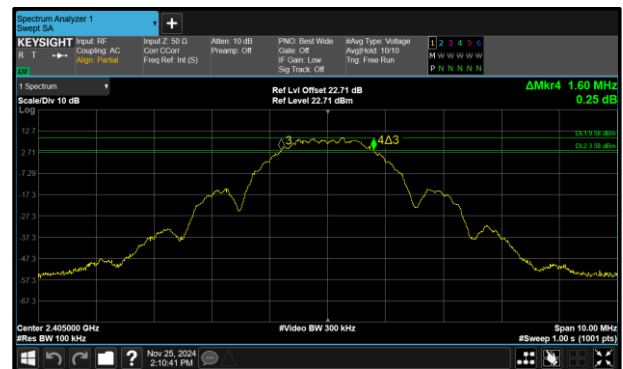


Figure 10 - Core 0 (A) 2405 MHz (CH11) 6 dB Bandwidth

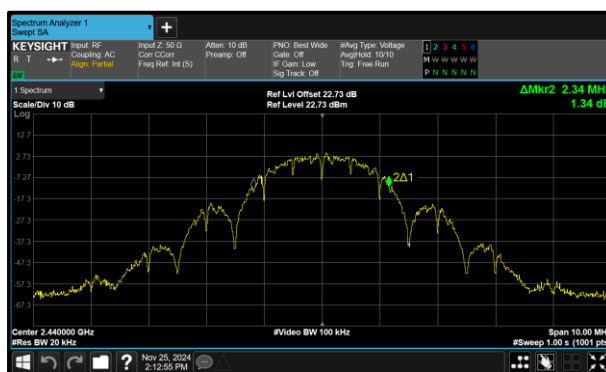


Figure 11 - Core 0 (A) 2440 MHz (CH18) 99% Bandwidth

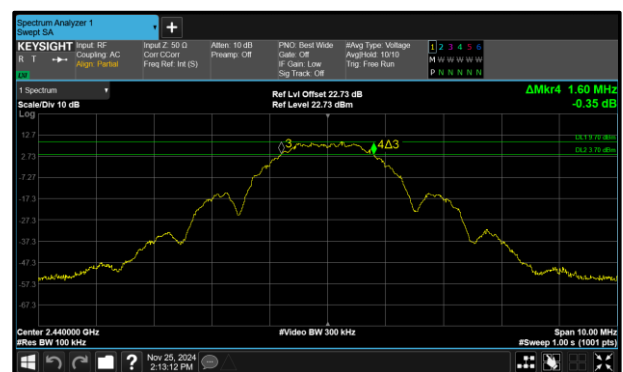


Figure 12 - Core 0 (A) 2440 MHz (CH18) 6 dB Bandwidth

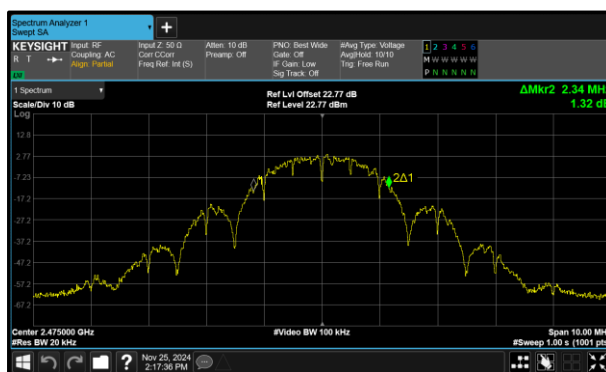


Figure 13 - Core 0 (A) 2475 MHz (CH25) 99% Bandwidth

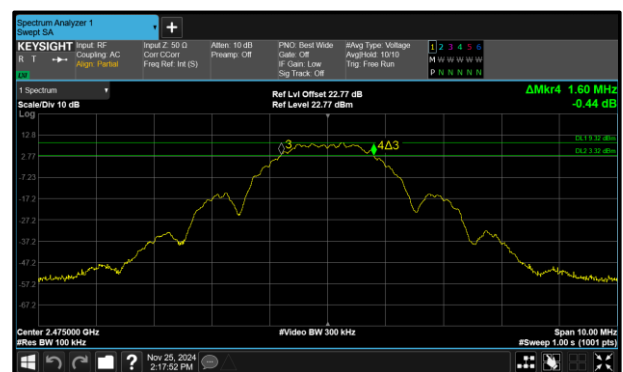


Figure 14 - Core 0 (A) 2475 MHz (CH25) 6 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 5.2 a)	Test Method(s):	C63.10 6.9.3 C63.10 11.8.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	Thread ePA	Duty Cycle (%):	-
Data Rate:	-	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2405	1.600	-	-	-	≥500.0
2440	1.610	-	-	-	≥500.0
2475	1.610	-	-	-	≥500.0

Table 16 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2405	2.350	-	-	-	-
2440	2.350	-	-	-	-
2475	2.340	-	-	-	-

Table 17 - 99% Bandwidth Results

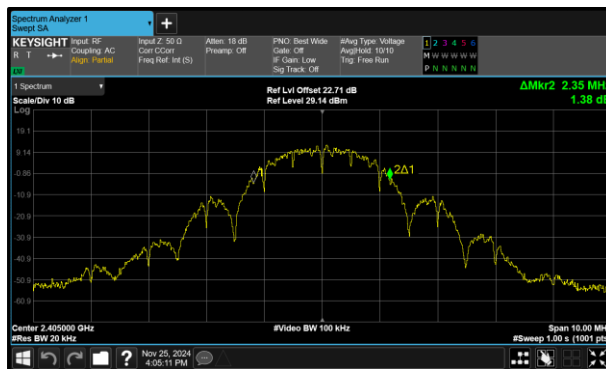


Figure 15 - Core 0 (A) 2405 MHz (CH11) 99% Bandwidth

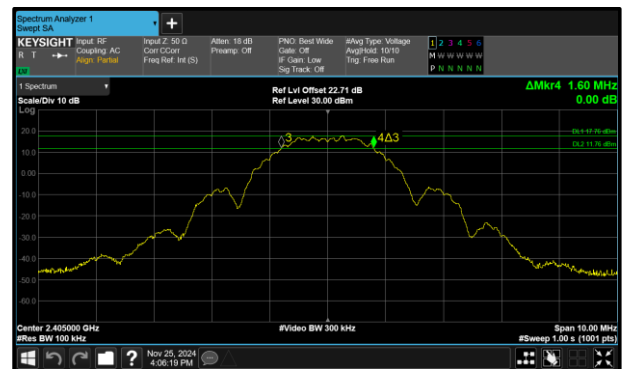


Figure 16 - Core 0 (A) 2405 MHz (CH11) 6 dB Bandwidth

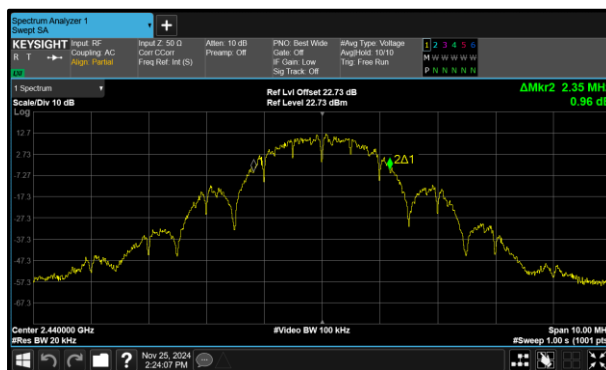


Figure 17 - Core 0 (A) 2440 MHz (CH18) 99% Bandwidth

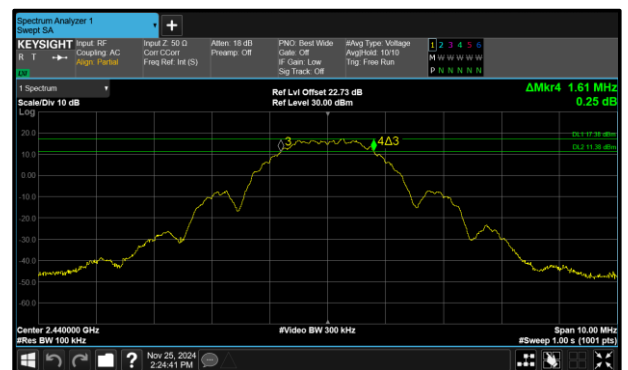


Figure 18 - Core 0 (A) 2440 MHz (CH18) 6 dB Bandwidth

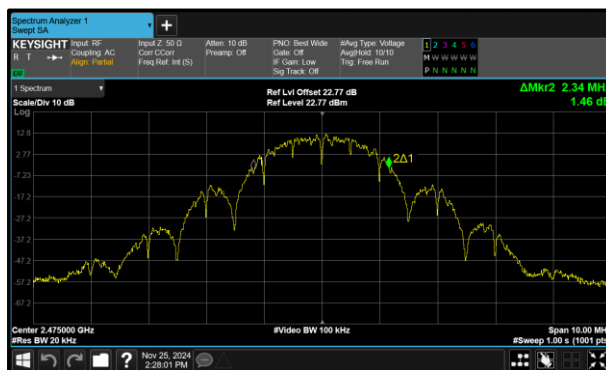


Figure 19 - Core 0 (A) 2475 MHz (CH25) 99% Bandwidth

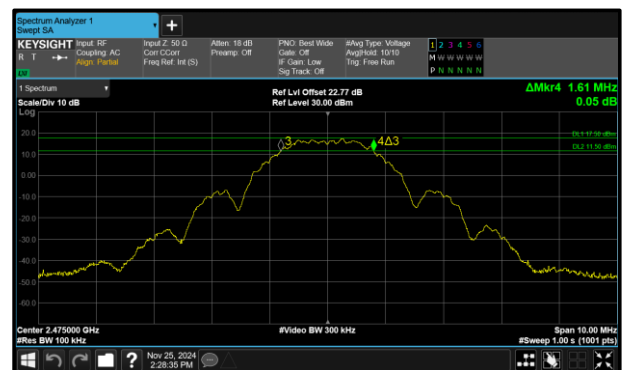


Figure 20 - Core 0 (A) 2475 MHz (CH25) 6 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 5.2 a)	Test Method(s):	C63.10 6.9.3 C63.10 11.8.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	Thread iPA	Duty Cycle (%):	-
Data Rate:	-	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2405	-	1.590	-	-	≥500.0
2440	-	1.610	-	-	≥500.0
2475	-	1.570	-	-	≥500.0

Table 18 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2405	-	2.330	-	-	-
2440	-	2.330	-	-	-
2475	-	2.340	-	-	-

Table 19 - 99% Bandwidth Results

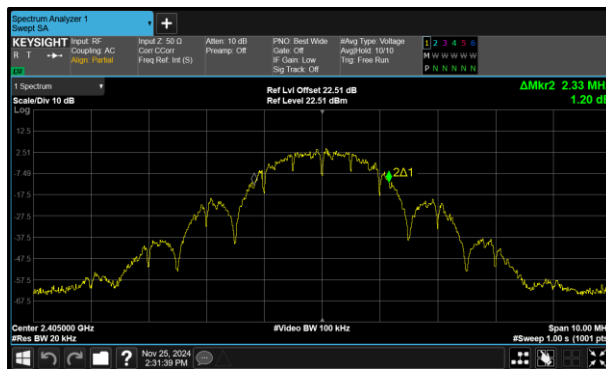


Figure 21 - Core 1 (B) 2405 MHz (CH11) 99% Bandwidth

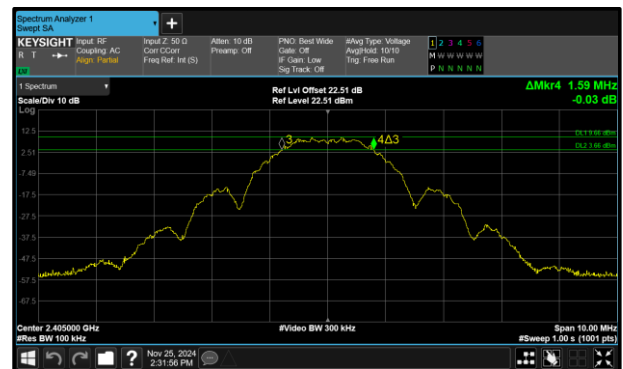


Figure 22 - Core 1 (B) 2405 MHz (CH11) 6 dB Bandwidth

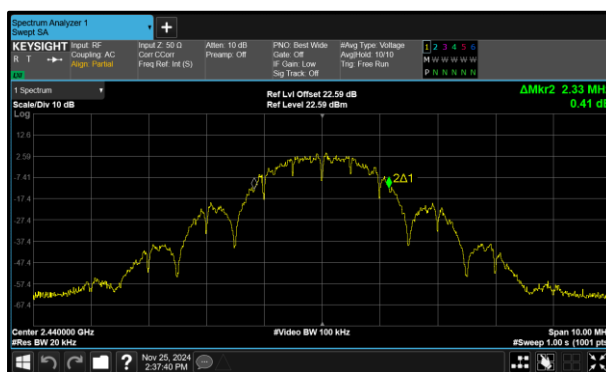


Figure 23 - Core 1 (B) 2440 MHz (CH18) 99% Bandwidth

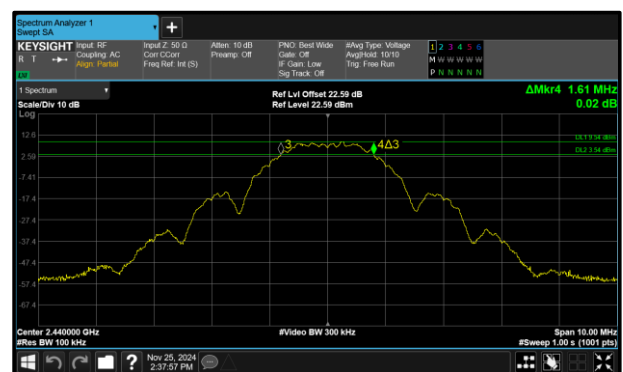


Figure 24 - Core 1 (B) 2440 MHz (CH18) 6 dB Bandwidth

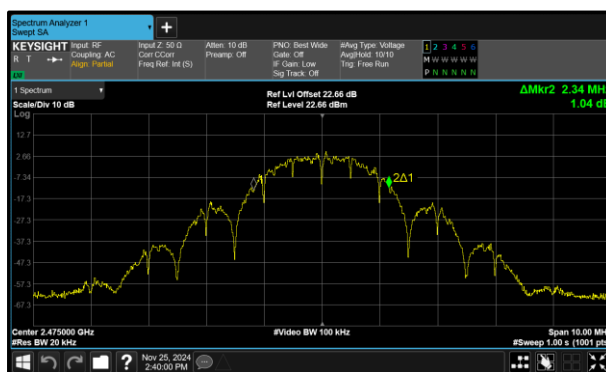


Figure 25 - Core 1 (B) 2475 MHz (CH25) 99% Bandwidth

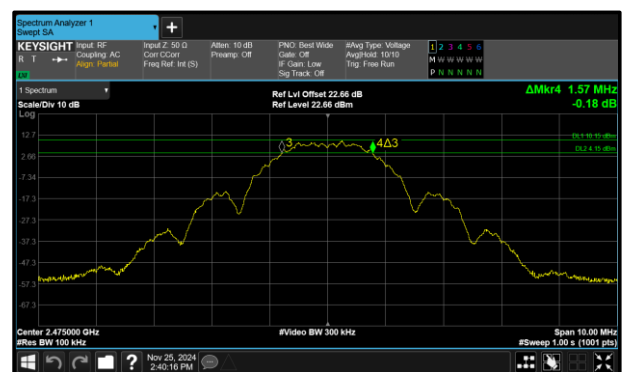


Figure 26 - Core 1 (B) 2475 MHz (CH25) 6 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 5.2 a)	Test Method(s):	C63.10 6.9.3 C63.10 11.8.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	Thread ePA	Duty Cycle (%):	-
Data Rate:	-	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2405	-	1.590	-	-	≥500.0
2440	-	1.610	-	-	≥500.0
2475	-	1.610	-	-	≥500.0

Table 20 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2405	-	2.340	-	-	-
2440	-	2.340	-	-	-
2475	-	2.340	-	-	-

Table 21 - 99% Bandwidth Results

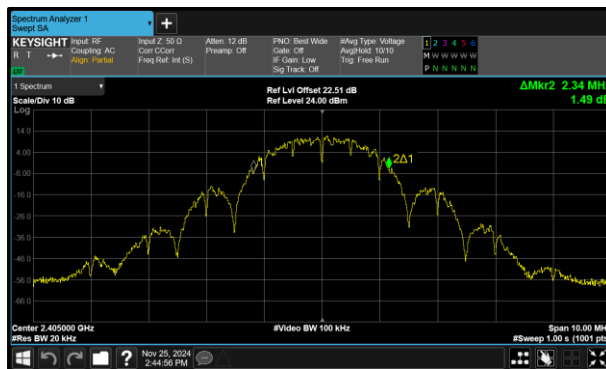


Figure 27 - Core 1 (B) 2405 MHz (CH11) 99% Bandwidth

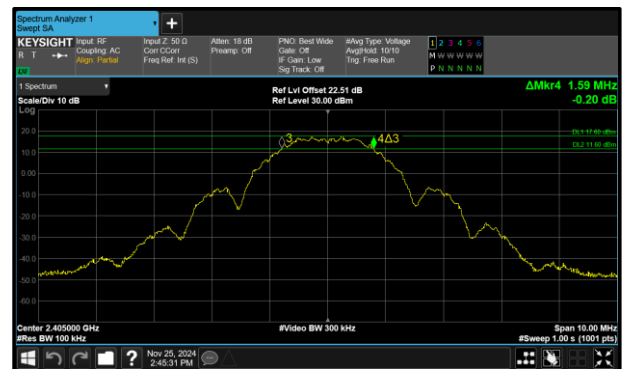


Figure 28 - Core 1 (B) 2405 MHz (CH11) 6 dB Bandwidth

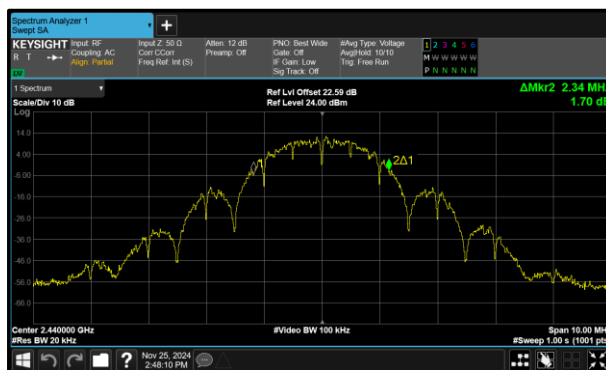


Figure 29 - Core 1 (B) 2440 MHz (CH18) 99% Bandwidth

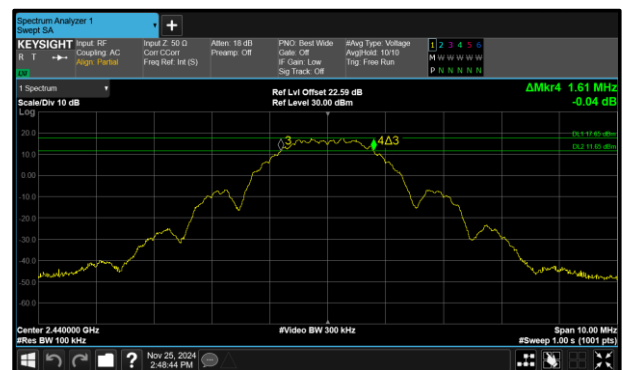


Figure 30 - Core 1 (B) 2440 MHz (CH18) 6 dB Bandwidth

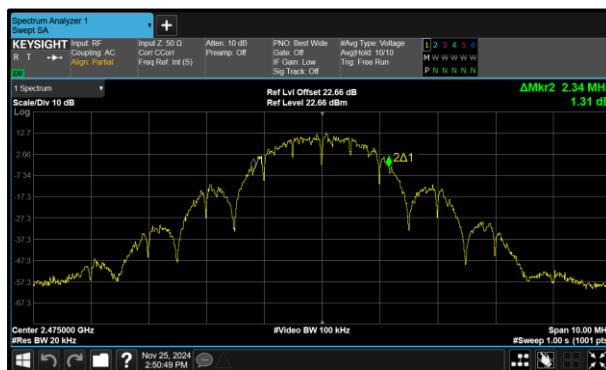


Figure 31 - Core 1 (B) 2475 MHz (CH25) 99% Bandwidth

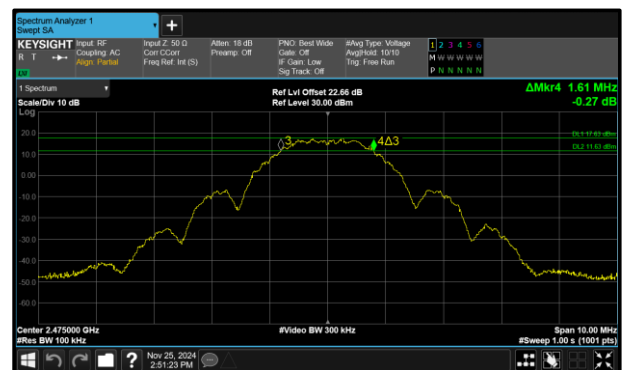


Figure 32 - Core 1 (B) 2475 MHz (CH25) 6 dB Bandwidth

FCC 47 CFR Part 15, Limit Clause 15.247(a)(2) and ISCED RSS-247, Clause 5.2(a)

The minimum 6 dB Bandwidth shall be at least 500 kHz.



2.2.7 Test Location and Test Equipment Used

This test was carried out in RF Chamber 18.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
AC Programmable Power Supply	iTech	IT7324	5225	-	O/P Mon
MXA Signal Analyser	Keysight Technologies	N9020B	5529	24	13-Dec-2024
Digital Multimeter	Fluke	115	6145	12	06-Jun-2025
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	6426	12	07-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6752	12	06-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6753	12	06-Feb-2025
Handheld Hygrometer	Fluke	971	6838	12	27-Aug-2025

Table 22

O/P Mon - Output Monitored using calibrated equipment



2.3 Maximum Conducted Output Power

2.3.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (b)
ISED RSS-247, Clause 5.4
ISED RSS-GEN, Clause 6.12

2.3.2 Equipment Under Test and Modification State

A3240, S/N: GVGH0F77DG - Modification State 0

2.3.3 Date of Test

25-November-2024

2.3.4 Test Method

The test was performed in accordance with ANSI C63.10 clause 11.9.2.3.2 Method AVGPM-G.

2.3.5 Environmental Conditions

Ambient Temperature	22.5 °C
Relative Humidity	54.5 %



2.3.6 Test Results

Thread

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 5.4 d)	Test Method(s):	C63.10 11.9.2.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	Thread iPA	Duty Cycle (%):	88.9
Data Rate:	-	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	5.70
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2405	12.71	-	-	-	12.71	30.00	-17.29
2440	12.80	-	-	-	12.80	30.00	-17.20
2475	12.53	-	-	-	12.53	30.00	-17.47

Table 23 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2405	12.71	-	-	-	12.71	30.00	-17.29	18.41	36.00	-17.59
2440	12.80	-	-	-	12.80	30.00	-17.20	18.50	36.00	-17.50
2475	12.53	-	-	-	12.53	30.00	-17.47	18.23	36.00	-17.77

Table 24 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 5.4 d)	Test Method(s):	C63.10 11.9.2.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	Thread ePA	Duty Cycle (%):	88.9
Data Rate:	-	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	5.70
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2405	20.77	-	-	-	20.77	30.00	-9.23
2440	20.57	-	-	-	20.57	30.00	-9.43
2475	20.76	-	-	-	20.76	30.00	-9.24

Table 25 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2405	20.77	-	-	-	20.77	30.00	-9.23	26.47	36.00	-9.53
2440	20.57	-	-	-	20.57	30.00	-9.43	26.27	36.00	-9.73
2475	20.76	-	-	-	20.76	30.00	-9.24	26.46	36.00	-9.54

Table 26 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 5.4 d)	Test Method(s):	C63.10 11.9.2.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	Thread iPA	Duty Cycle (%):	88.9
Data Rate:	-	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	4.80
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2405	-	12.73	-	-	12.73	30.00	-17.27
2440	-	12.56	-	-	12.56	30.00	-17.44
2475	-	12.65	-	-	12.65	30.00	-17.35

Table 27 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2405	-	12.73	-	-	12.73	30.00	-17.27	17.53	36.00	-18.47
2440	-	12.56	-	-	12.56	30.00	-17.44	17.36	36.00	-18.64
2475	-	12.65	-	-	12.65	30.00	-17.35	17.45	36.00	-18.55

Table 28 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 5.4 d)	Test Method(s):	C63.10 11.9.2.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	Thread ePA	Duty Cycle (%):	88.9
Data Rate:	-	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	4.80
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2405	-	20.94	-	-	20.94	30.00	-9.06
2440	-	20.84	-	-	20.84	30.00	-9.16
2475	-	20.83	-	-	20.83	30.00	-9.17

Table 29 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2405	-	20.94	-	-	20.94	30.00	-9.06	25.74	36.00	-10.26
2440	-	20.84	-	-	20.84	30.00	-9.16	25.64	36.00	-10.36
2475	-	20.83	-	-	20.83	30.00	-9.17	25.63	36.00	-10.37

Table 30 - ISSED Maximum Conducted (average) Output Power Results

FCC 47 CFR Part 15, Limit Clause 15.247 (b)(3)

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

ISSED RSS-247, Limit Clause 5.4 (d)

For DTSS employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e) of the specification.



2.3.7 Test Location and Test Equipment Used

This test was carried out in RF Chamber 18.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
AC Programmable Power Supply	iTech	IT7324	5225	-	O/P Mon
USB Power Sensor	Boonton	RTP5008	5820	12	07-Feb-2025
USB Power Sensor	Boonton	RTP5008	5821	12	07-Feb-2025
Digital Multimeter	Fluke	115	6145	12	06-Jun-2025
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	6426	12	07-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6752	12	06-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6753	12	06-Feb-2025
Handheld Hygrometer	Fluke	971	6838	12	27-Aug-2025

Table 31

O/P Mon - Output Monitored using calibrated equipment



2.4 Authorised Band Edges

2.4.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (d)
ISED RSS-247, Clause 5.5

2.4.2 Equipment Under Test and Modification State

A3240, S/N: H2XGP4VW6W - Modification State 0

2.4.3 Date of Test

01-October-2024

2.4.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 6.10.4.

2.4.5 Environmental Conditions

Ambient Temperature	23.1 °C
Relative Humidity	59.3 %



2.4.6 Test Results

Thread

iPA - Core 0 (SISO)

Mode	TX Frequency (MHz)	Band Edge Frequency (MHz)	Level (dBc)
Thread	2405	2400	-63.92

Table 32 - iPA, Core 0, SISO Authorised Band Edge Results

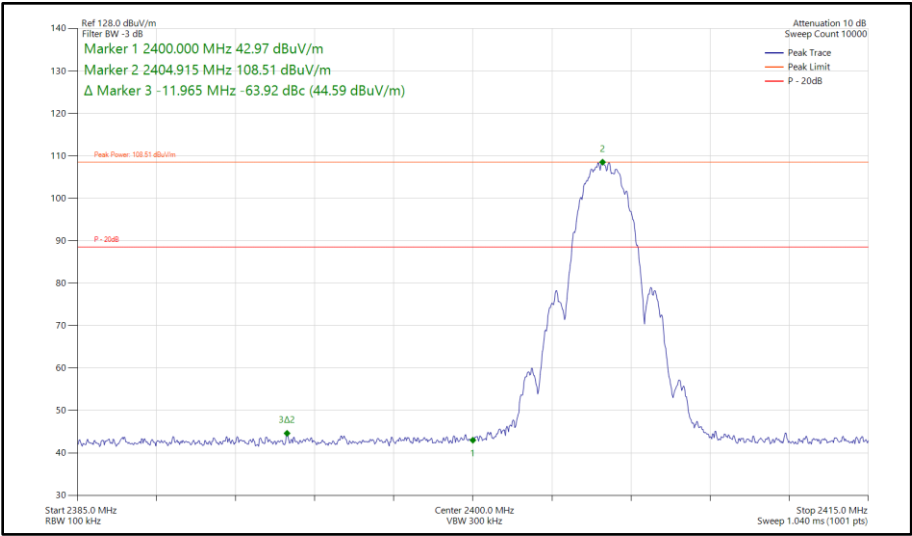


Figure 33 - Thread, iPA, SISO, Core 0 - 2405 MHz
Band Edge Frequency 2400 MHz



iPA - Core 1 (SISO)

Mode	TX Frequency (MHz)	Band Edge Frequency (MHz)	Level (dBc)
Thread	2405	2400	-63.37

Table 33 - iPA, Core 1, SISO Authorised Band Edge Results

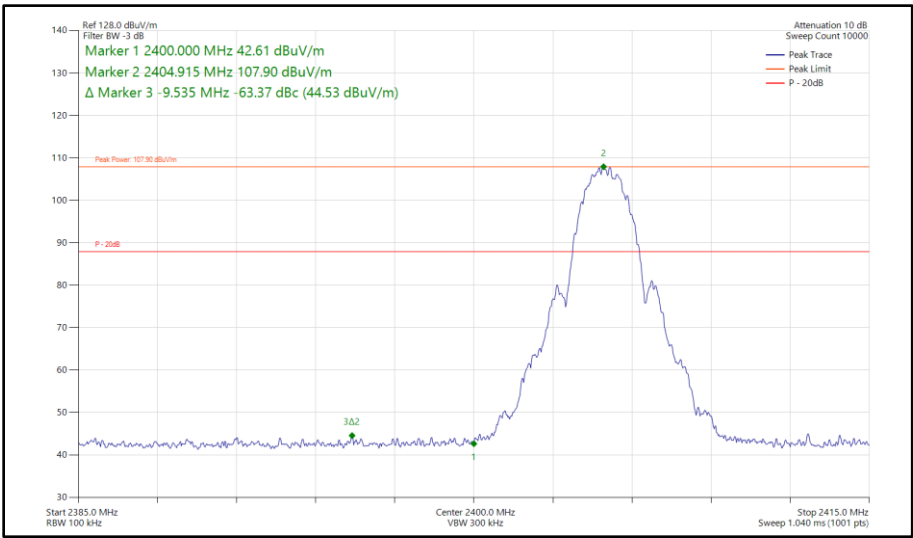


Figure 34 - Thread, iPA, SISO, Core 1 - 2405 MHz
Band Edge Frequency 2400 MHz



ePA - Core 0 (SISO)

Mode	TX Frequency (MHz)	Band Edge Frequency (MHz)	Level (dBc)
Thread	2405	2400	-68.01

Table 34 - ePA, Core 0, SISO Authorised Band Edge Results


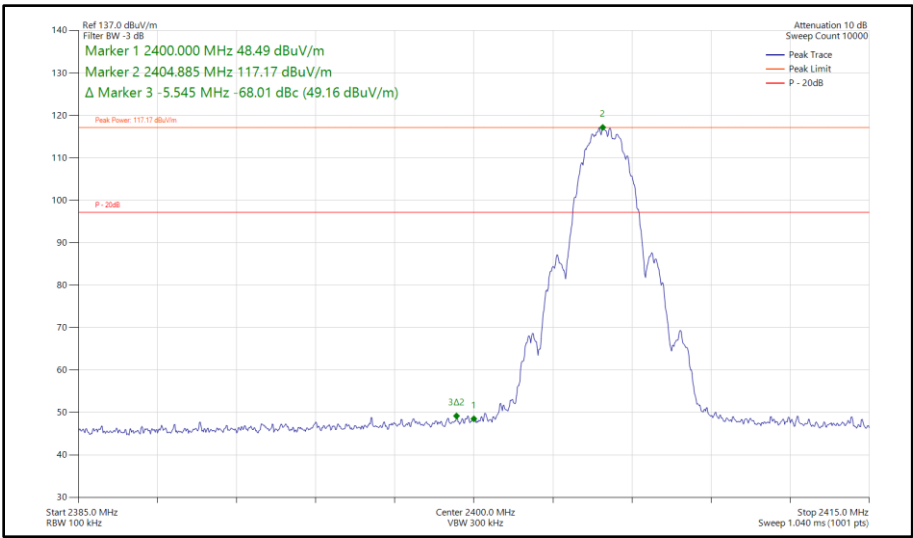


Figure 35 - Thread, ePA, SISO, Core 0 - 2405 MHz
Band Edge Frequency 2400 MHz

ePA - Core 1 (SISO)

Mode	TX Frequency (MHz)	Band Edge Frequency (MHz)	Level (dBc)
Thread	2405	2400	-65.98

Table 35 - ePA, Core 1, SISO Authorised Band Edge Results

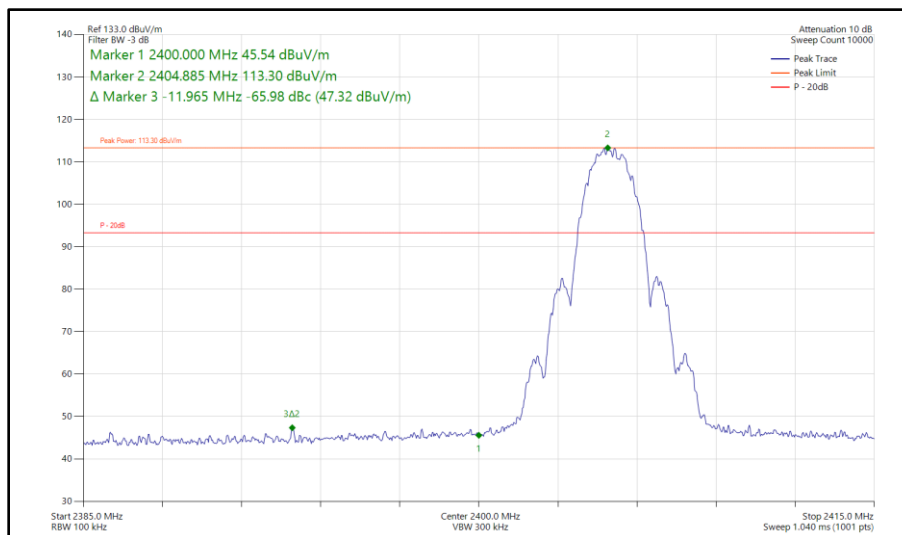

**Figure 36 - Thread, ePA, SISO, Core 1 - 2405 MHz
Band Edge Frequency 2400 MHz**

FCC 47 CFR Part 15, Limit Clause 15.247 (d)

20 dB below the fundamental measured in a 100 kHz bandwidth using a peak detector. If the transmitter complies with the conducted power limits, based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB below the fundamental instead of 20 dB.

ISED RSS-247, Limit Clause 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.



2.4.7 Test Location and Test Equipment Used

This test was carried out in RF Chamber 17.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Cable (18 GHz)	Rosenberger	LU7-071-1000	5102	12	21-Nov-2024
Emissions Software	TUV SUD	EmX V3.4.2	5125	-	Software
Cable 2.92m	Junkosha	MWX241-01000KMS	5413	12	23-May-2025
EMI Test Receiver	Rohde & Schwarz	ESW44	6294	12	06-Jan-2025
USB Spectrum Analyser	Signal Hound	SA124B	6298	-	TU
Digital Multimeter	Fluke	115	6345	12	24-Jul-2025
Humidity and Temperature Meter	R.S Components	1364	6346	12	06-Mar-2025
SAC Switch Unit	TUV SUD	TUV_SSU_004 PLC	6349	12	07-May-2025
Horn Antenna (1–10.5 GHz)	Schwarzbeck	BBHA 9120 B	6457	12	05-May-2025
AC Power Supply	iTech	IT7324	6657	-	O/P Mon
3m Semi-Anechoic Chamber	Albatross Projects	RF Chamber 17	6658	36	28-Jan-2026
Mast and Turntable Controller	Maturo Gmbh	FCU3.0	6659	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	6660	-	TU
Turntable	Maturo Gmbh	TT1.5SI	6661	-	TU
8m Cable	Junkosha	MWX221-08000AMSAMS/B	6748	12	01-Feb-2025
8M SMA Cable	Junkosha	MWX221-08000AMSAMS/B	6833	12	14-Aug-2025
Cable Assembly	SpecTech	PE300-60	6859	-	TU
Cable Assembly	SpecTech	PE300-60	6860	-	TU

Table 36

TU - Traceability Unscheduled

O/P Mon - Output Monitored using calibrated equipment



2.5 Spurious Radiated Emissions

2.5.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.209 and 15.247 (d)
ISED RSS-247, Clause 3.3 and 5.5
ISED RSS-GEN, Clause 6.13 and 8.9

2.5.2 Equipment Under Test and Modification State

A3240, S/N: K4L392N93P - Modification State 0
A3240, S/N: H2XGP4VW6W - Modification State 0

2.5.3 Date of Test

10-October-2024 to 13-November-2024

2.5.4 Test Method

This test was performed in accordance with ANSI C63.10, clause 6.3, 6.5 and 6.6.

Ports on the EUT were terminated with loads as described in ANSI C63.4 clause 6.2.4.

In the 30 MHz to 1 GHz range pre-scans were only performed on the mid channel (2440 MHz) only.

The plots shown are the characterisation of the EUT. The limits on the plots represent the most stringent case for restricted bands, (74/54 dBuV/m) when compared to 20 dBc outside restricted bands. The limits shown have been used as a threshold to determine where further measurements are necessary. Where results are within 10 dB of the limits shown on the plots, further investigation was carried out and reported in results tables.

The following conversion can be applied to convert from dBμV/m to μV/m:
 $10^{(\text{Field Strength in dB}\mu\text{V/m}/20)}$

To determine the emission characteristic of the EUT above 18 GHz, the test antenna was swept over all faces of the EUT whilst observing a spectral display. The frequency of any emissions of interest was noted for formal measurement at the correct measurement distance of 1m. This procedure was repeated for all relevant transmit operating channels.

Above 18 GHz, the measurement distance was reduced to 1 m. The limit line was increased by $20 \cdot \text{LOG}(3/1) = 9.54$ dB.

Where formal measurements have been necessary, the results have been presented in the emissions table.

2.5.5 Example Test Setup Diagram

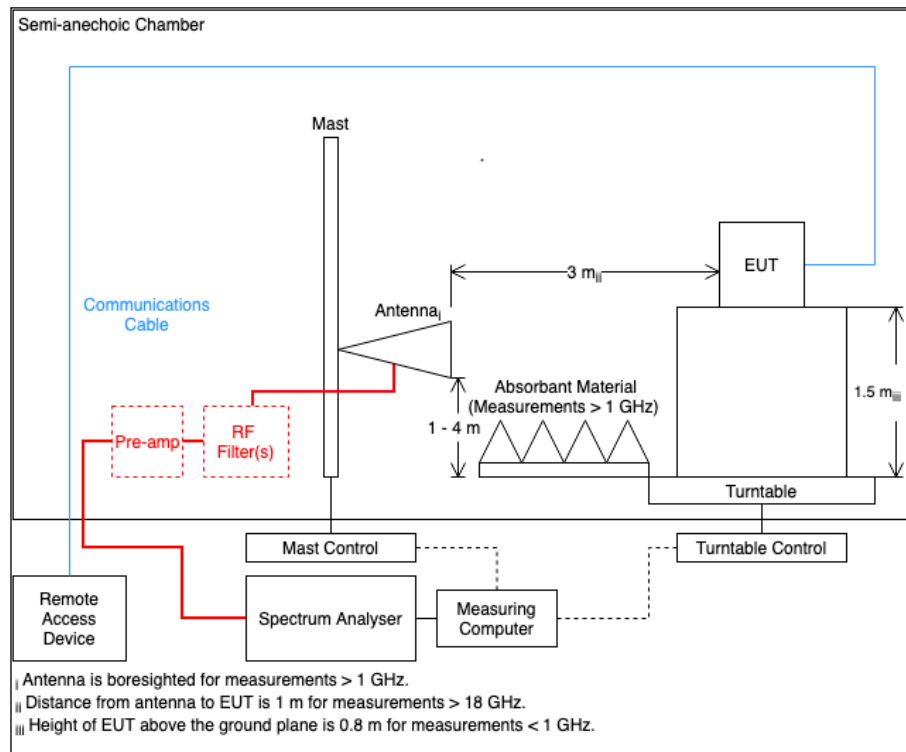


Figure 37

2.5.6 Environmental Conditions

Ambient Temperature	22.3 - 22.9 °C
Relative Humidity	43.5 - 51.7 %

2.5.7 Test Results

Thread

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
2369.654	38.56	54.00	-15.44	RMS	0	288	Vertical
2369.947	33.62	54.00	-20.38	RMS	329	310	Horizontal
2483.611	34.29	54.00	-19.71	RMS	350	342	Vertical

Table 37 - 2405 MHz (CH11), Thread, ePA, Core 0, 1 GHz to 26 GHz

No other emissions found within 10 dB of the limit.

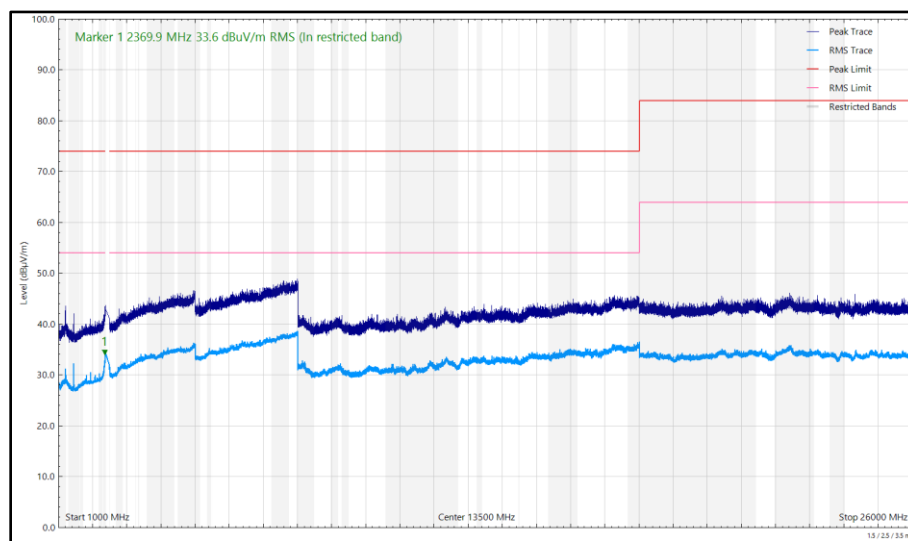


Figure 38 - 2405 MHz (CH11), Thread, ePA, Core 0, 1 GHz to 26 GHz, Horizontal

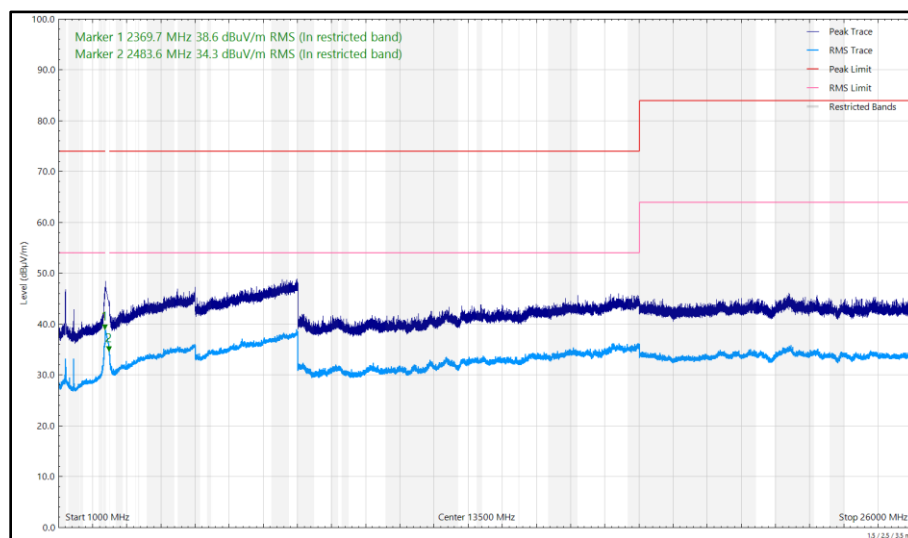


Figure 39 - 2405 MHz (CH11), Thread, ePA, Core 0, 1 GHz to 26 GHz, Vertical

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
108.051	33.31	43.50	-10.19	Q-Peak	0	308	Horizontal
111.744	32.62	43.50	-10.88	Q-Peak	270	274	Vertical
245.598	24.83	46.00	-21.17	Q-Peak	276	100	Vertical
325.678	31.14	46.00	-14.86	Q-Peak	90	100	Horizontal
1440.173	34.49	54.00	-19.51	RMS	19	146	Vertical
2389.744	36.33	54.00	-17.67	RMS	350	281	Vertical
2483.646	37.16	54.00	-16.84	RMS	4	314	Vertical

Table 38 - 2440 MHz (CH18), Thread, ePA, Core 0, 30 MHz to 26 GHz

No other emissions found within 10 dB of the limit.

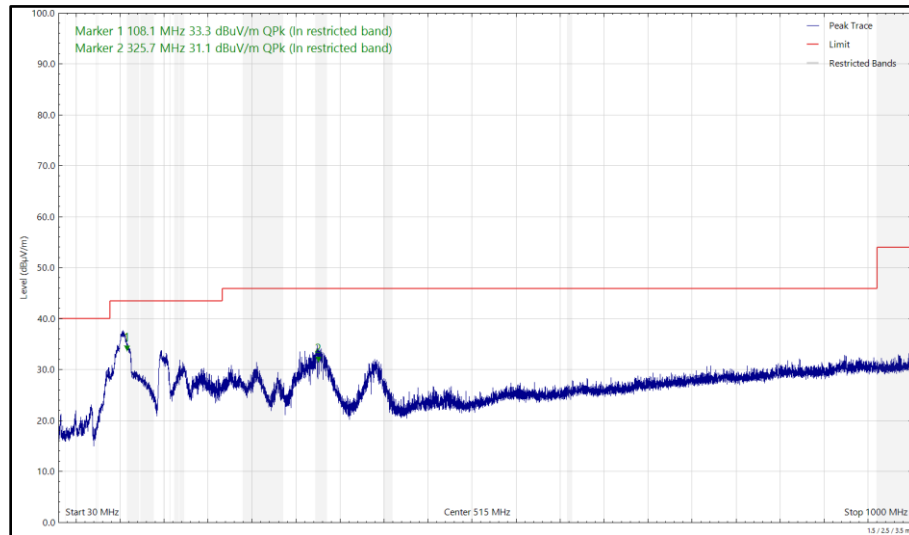


Figure 40 - 2440 MHz (CH18), Thread, ePA, Core 0, 30 MHz to 1 GHz, Horizontal (Peak)

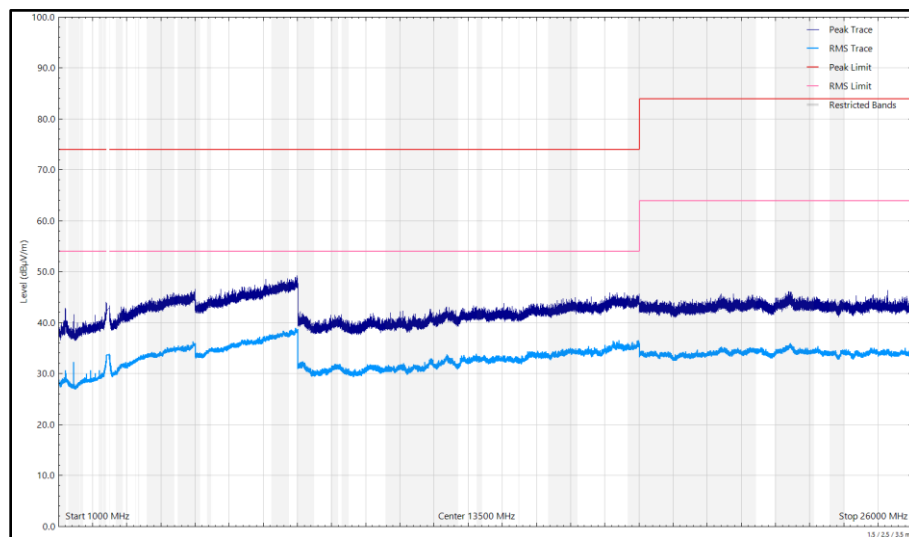


Figure 41 - 2440 MHz (CH18), Thread, ePA, Core 0, 1 GHz to 26 GHz, Horizontal

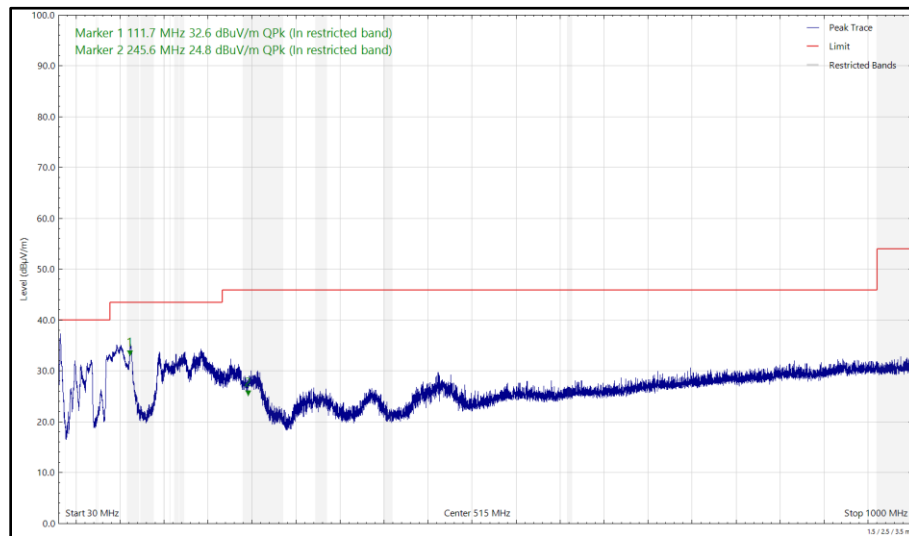


Figure 42 - 2440 MHz (CH18), Thread, ePA, Core 0, 30 MHz to 1 GHz, Vertical (Peak)

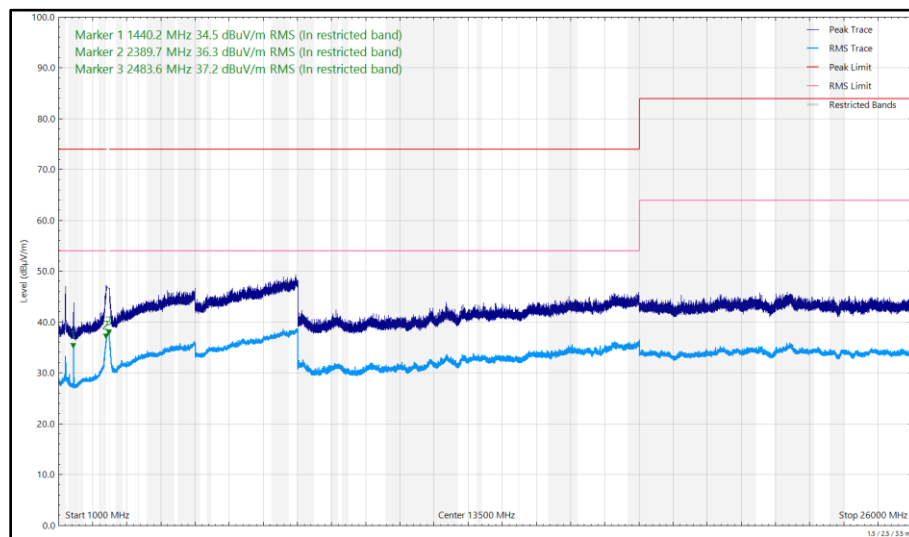


Figure 43 - 2440 MHz (CH18), Thread, ePA, Core 0, 1 GHz to 26 GHz, Vertical

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
2389.901	34.34	54.00	-19.66	RMS	347	286	Vertical
2498.612	36.77	54.00	-17.23	RMS	309	333	Horizontal
2498.699	40.97	54.00	-13.03	RMS	2	333	Vertical

Table 39 - 2475 MHz (CH25), Thread, ePA, Core 0, 1 GHz to 26 GHz

No other emissions found within 10 dB of the limit.

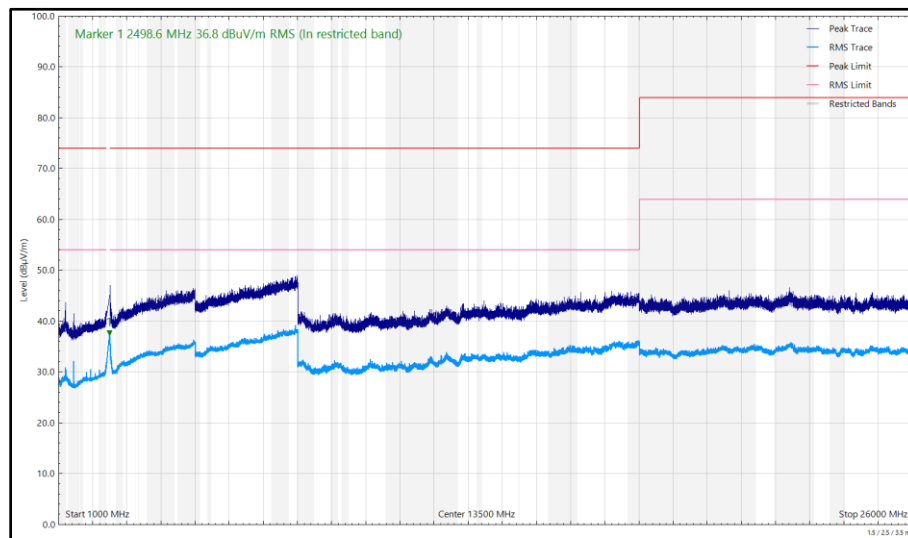


Figure 44 - 2475 MHz (CH25), Thread, ePA, Core 0, 1 GHz to 26 GHz, Horizontal

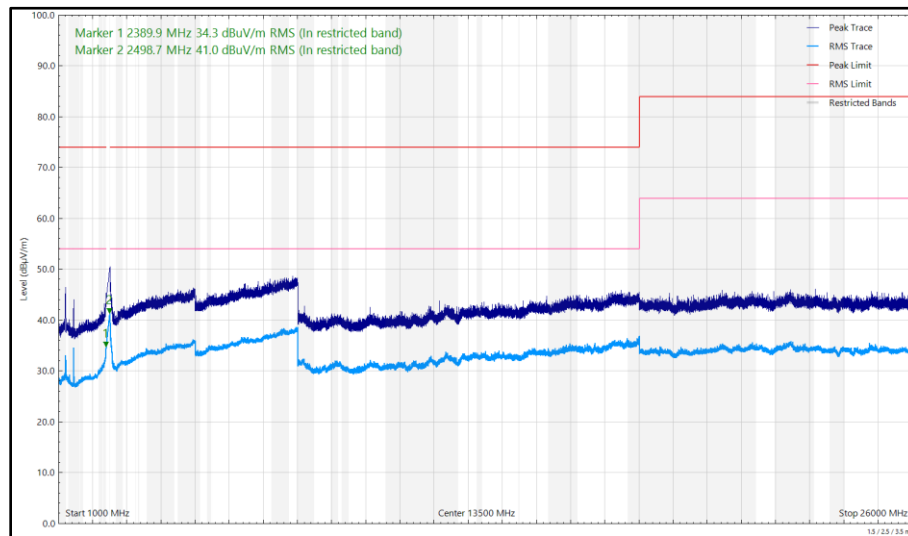


Figure 45 - 2475 MHz (CH25), Thread, ePA, Core 0, 1 GHz to 26 GHz, Vertical

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
1440.181	34.27	54.00	-19.73	RMS	18	132	Vertical
2369.978	37.44	54.00	-16.56	RMS	347	255	Vertical

Table 40 - 2405 MHz (CH11), Thread, ePA, Core 1, 1 GHz to 26 GHz

No other emissions found within 10 dB of the limit.

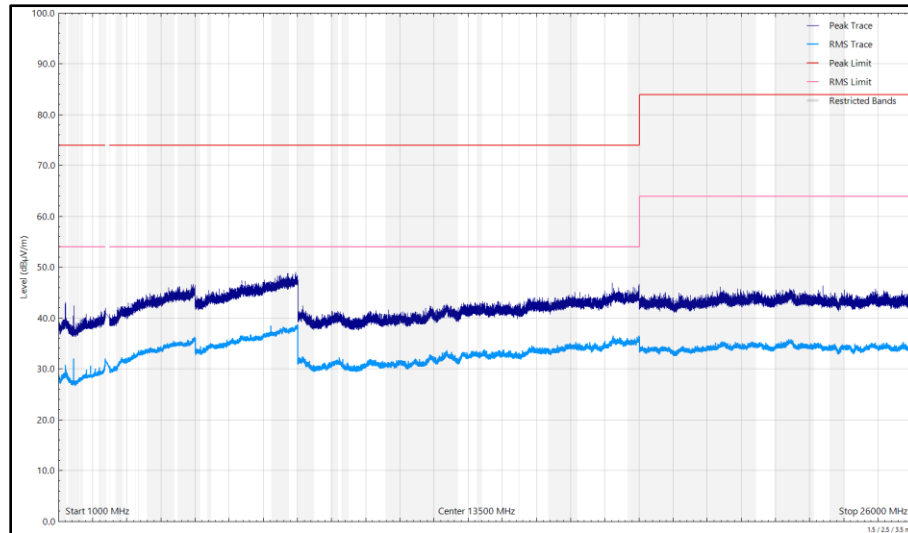


Figure 46 - 2405 MHz (CH11), Thread, ePA, Core 1, 1 GHz to 26 GHz, Horizontal

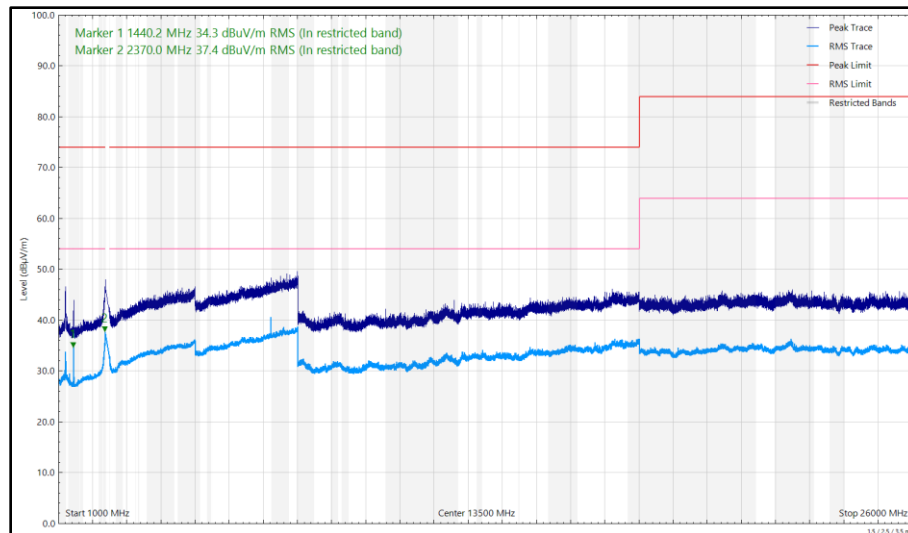


Figure 47 - 2405 MHz (CH11), Thread, ePA, Core 1, 1 GHz to 26 GHz, Vertical

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
108.085	33.37	43.50	-10.13	Q-Peak	360	288	Horizontal
111.955	33.66	43.50	-9.84	Q-Peak	97	104	Vertical
247.756	25.72	46.00	-20.28	Q-Peak	237	100	Vertical
327.536	30.20	46.00	-15.80	Q-Peak	91	105	Horizontal
2389.897	36.56	54.00	-17.44	RMS	342	390	Vertical
2483.760	36.22	54.00	-17.78	RMS	14	252	Vertical
7318.630	38.94	54.00	-15.06	RMS	280	392	Horizontal
7318.671	41.29	54.00	-12.71	RMS	313	250	Vertical

Table 41 - 2440 MHz (CH18), Thread, ePA, Core 1, 30 MHz to 26 GHz

No other emissions found within 10 dB of the limit.

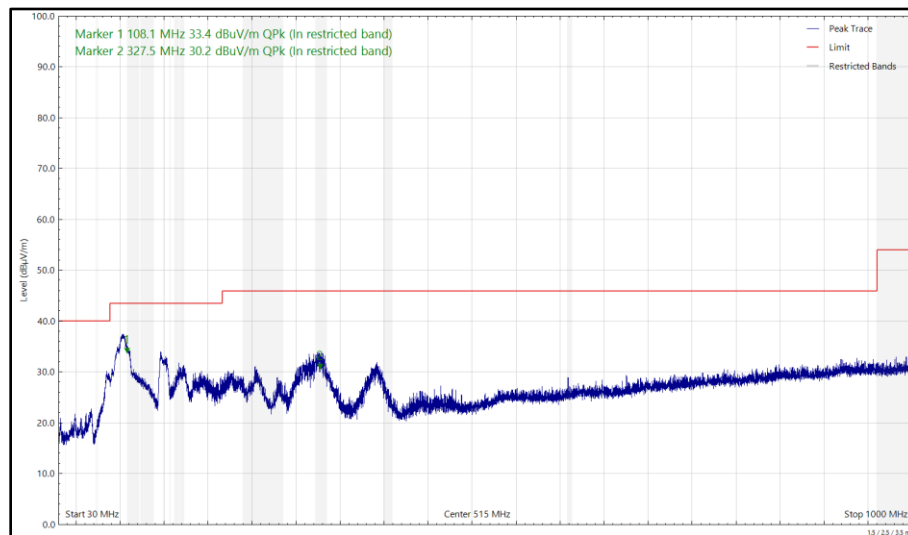


Figure 48 - 2440 MHz (CH18), Thread, ePA, Core 1, 30 MHz to 1 GHz, Horizontal (Peak)

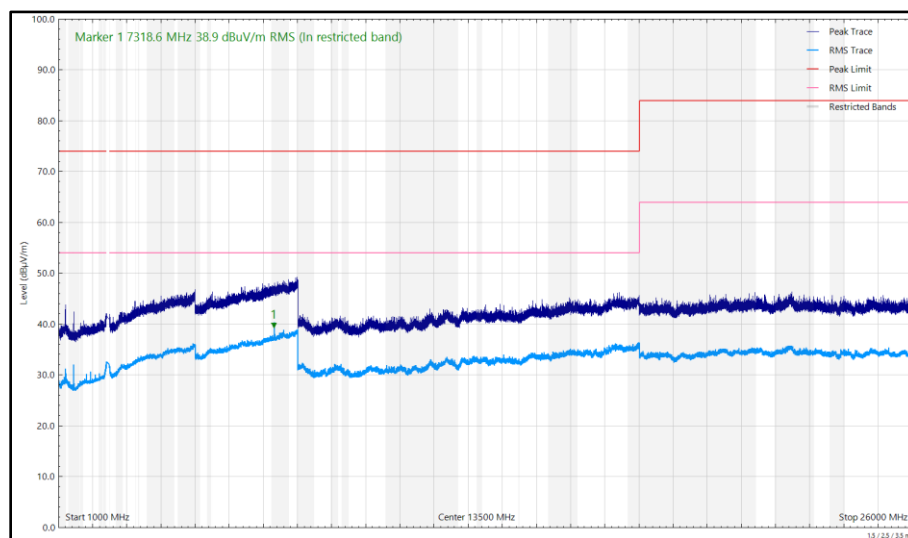


Figure 49 - 2440 MHz (CH18), Thread, ePA, Core 1, 1 GHz to 26 GHz, Horizontal

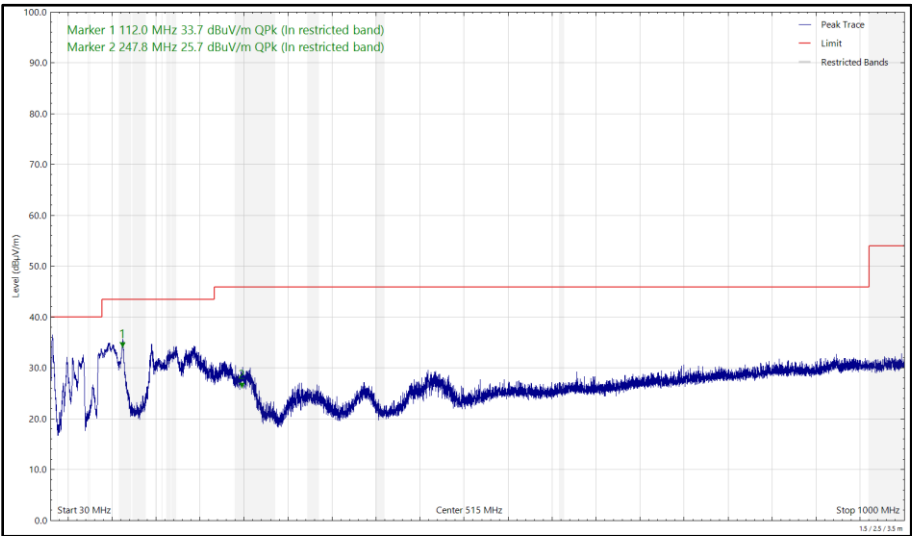


Figure 50 - 2440 MHz (CH18), Thread, ePA, Core 1, 30 MHz to 1 GHz, Vertical (Peak)

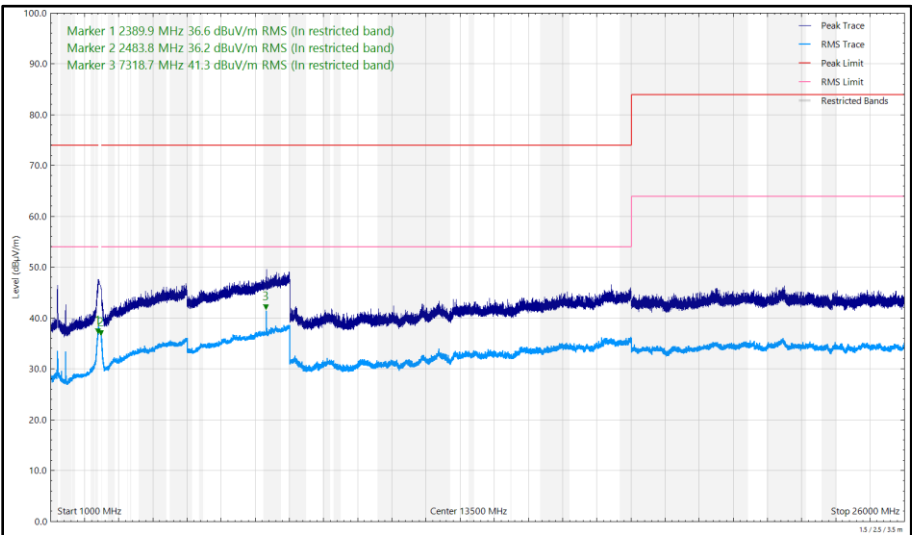


Figure 51 - 2440 MHz (CH18), Thread, ePA, Core 1, 1 GHz to 26 GHz, Vertical

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
2389.886	34.83	54.00	-19.17	RMS	351	278	Vertical
2498.503	40.47	54.00	-13.53	RMS	14	396	Vertical
2498.655	35.11	54.00	-18.89	RMS	49	374	Horizontal
7423.685	36.66	54.00	-17.34	RMS	173	316	Horizontal
7423.695	39.99	54.00	-14.01	RMS	312	268	Vertical

Table 42 - 2475 MHz (CH25), Thread, ePA, Core 1, 1 GHz to 26 GHz

No other emissions found within 10 dB of the limit.

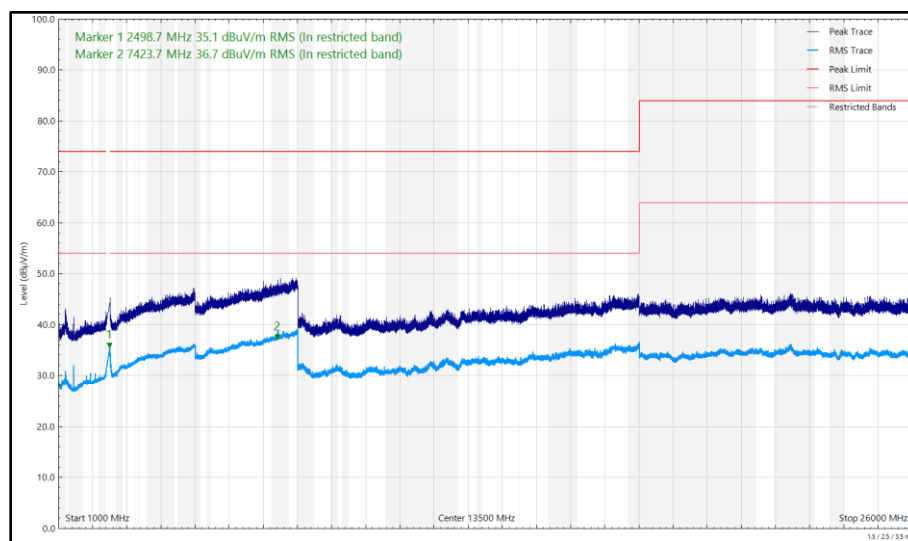


Figure 52 - 2475 MHz (CH25), Thread, ePA, Core 1, 1 GHz to 26 GHz, Horizontal

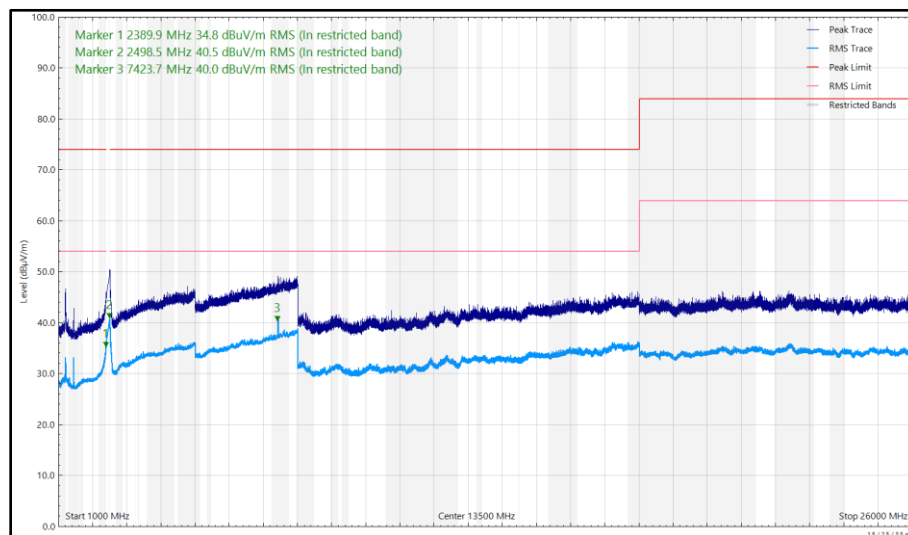


Figure 53 - 2475 MHz (CH25), Thread, ePA, Core 1, 1 GHz to 26 GHz, Vertical

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
1440.108	34.16	54.00	-19.84	RMS	15	137	Vertical
4810.872	37.90	54.00	-16.10	RMS	341	273	Vertical

Table 43 - 2405 MHz (CH11), Thread, iPA, Core 0, 1 GHz to 26 GHz

No other emissions found within 10 dB of the limit.

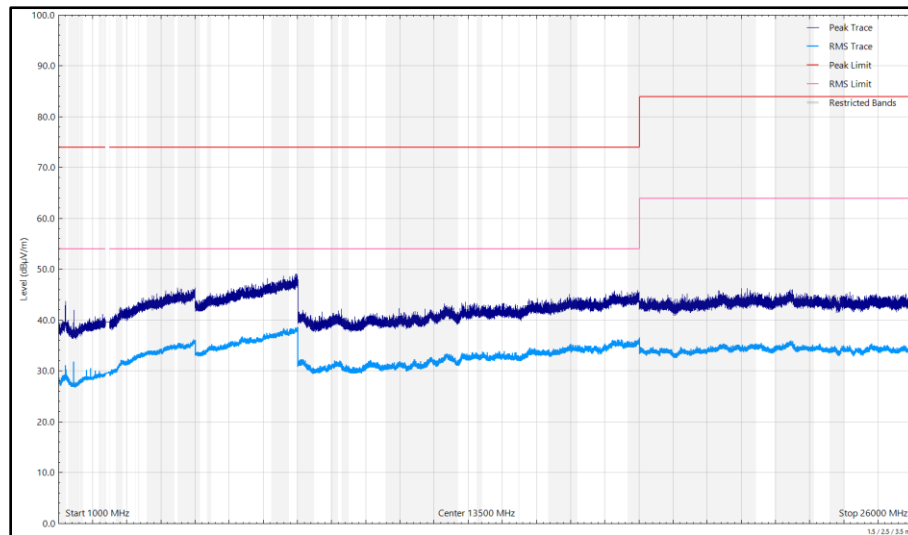


Figure 54 - 2405 MHz (CH11), Thread, iPA, Core 0, 1 GHz to 26 GHz, Horizontal

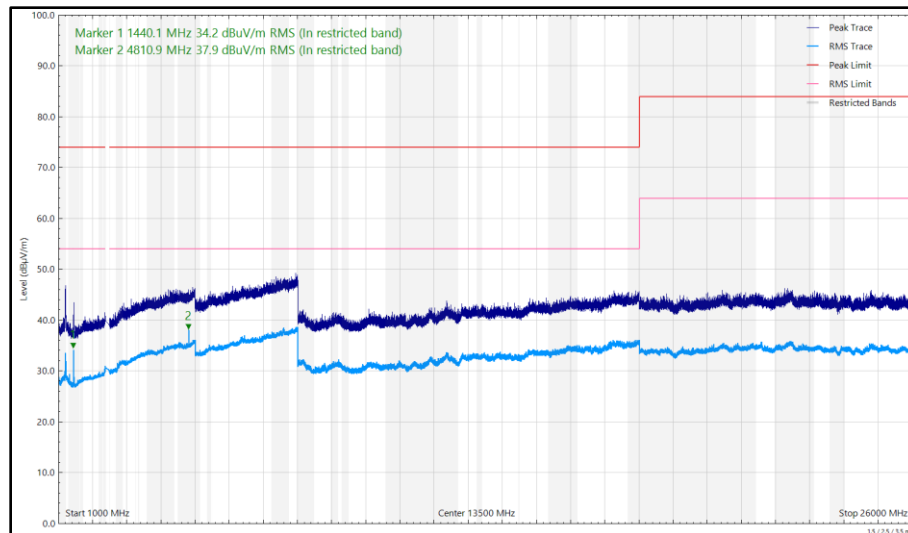


Figure 55 - 2405 MHz (CH11), Thread, iPA, Core 0, 1 GHz to 26 GHz, Vertical

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
108.331	32.61	43.50	-10.89	Q-Peak	0	323	Horizontal
112.346	33.01	43.50	-10.49	Q-Peak	100	100	Vertical
244.513	24.09	46.00	-21.91	Q-Peak	280	105	Vertical
330.214	28.46	46.00	-17.54	Q-Peak	82	100	Horizontal
1440.165	34.46	54.00	-19.54	RMS	20	151	Vertical
4879.053	37.40	54.00	-16.60	RMS	345	291	Vertical

Table 44 - 2440 MHz (CH18), Thread, iPA, Core 0, 30 MHz to 26 GHz

No other emissions found within 10 dB of the limit.

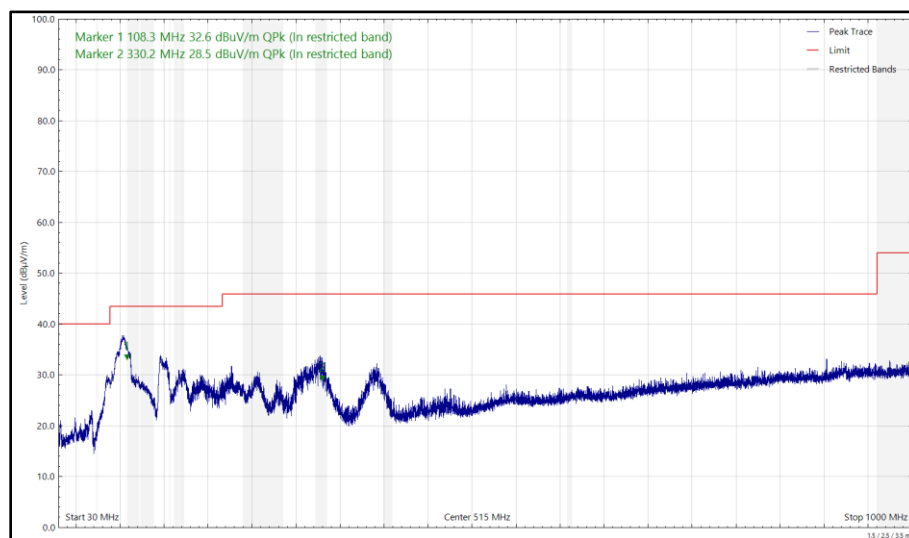


Figure 56 - 2440 MHz (CH18), Thread, iPA, Core 0, 30 MHz to 1 GHz, Horizontal (Peak)

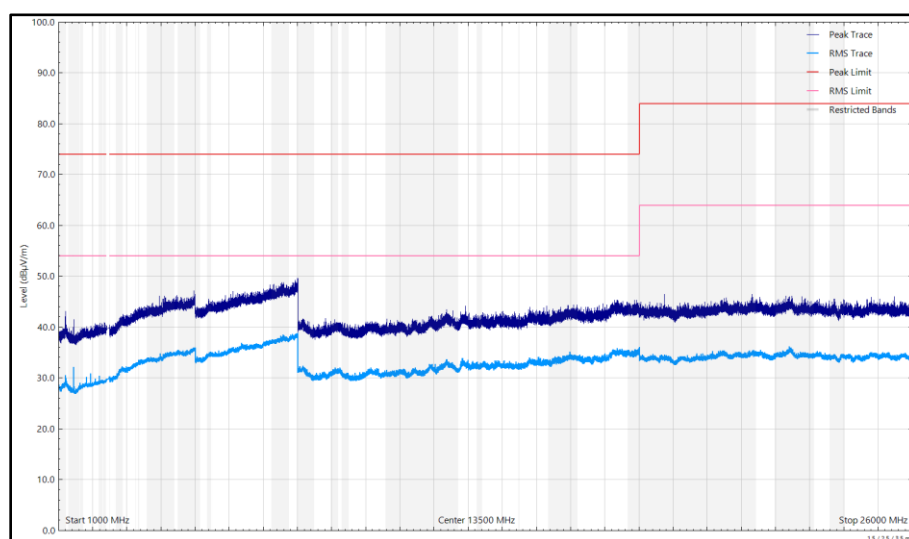


Figure 57 - 2440 MHz (CH18), Thread, iPA, Core 0, 1 GHz to 26 GHz, Horizontal

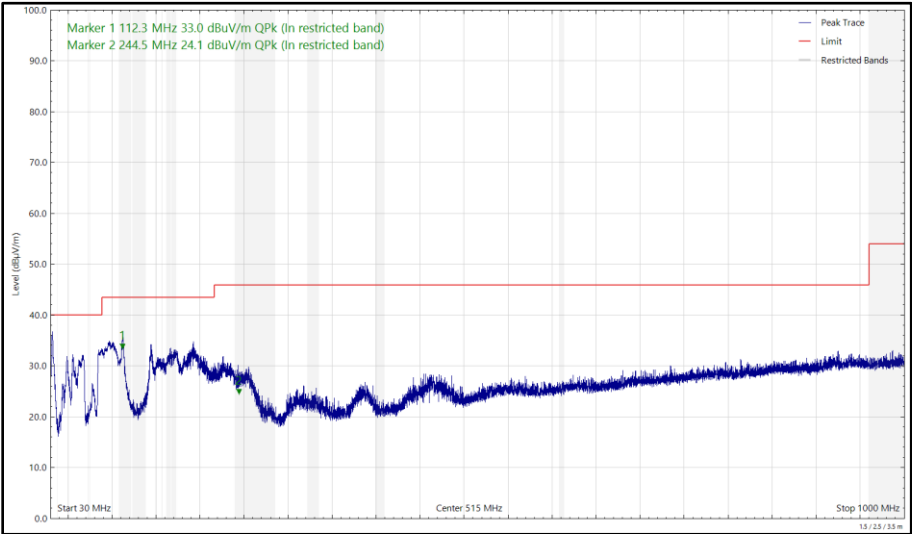


Figure 58 - 2440 MHz (CH18), Thread, iPA, Core 0, 30 MHz to 1 GHz, Vertical (Peak)

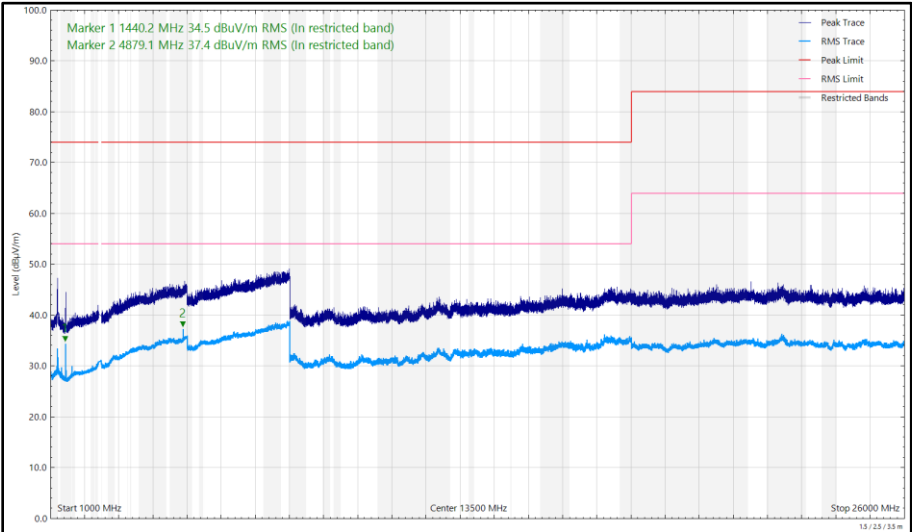


Figure 59 - 2440 MHz (CH18), Thread, iPA, Core 0, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 45 - 2475 MHz (CH25), Thread, iPA, Core 0, 1 GHz to 26 GHz

*No emissions found within 10 dB of the limit.

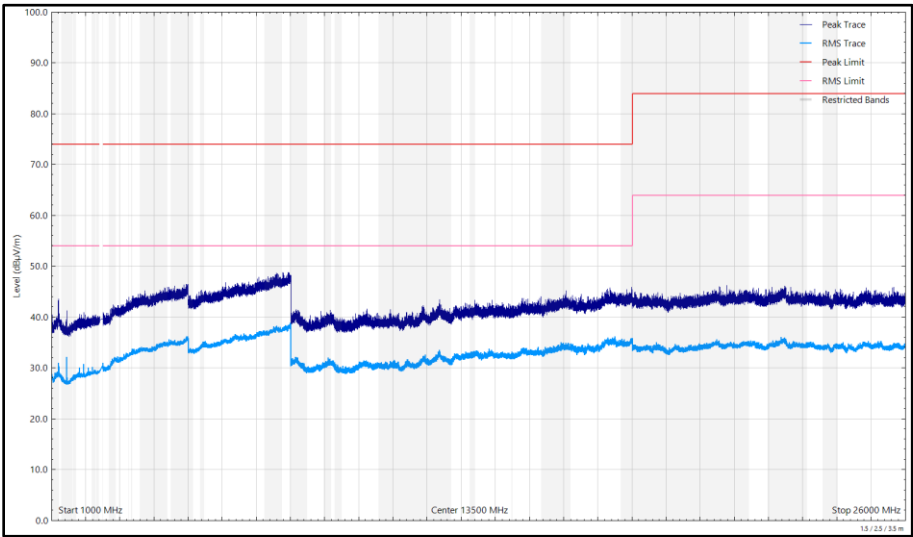


Figure 60 - 2475 MHz (CH25), Thread, iPA, Core 0, 1 GHz to 26 GHz, Horizontal

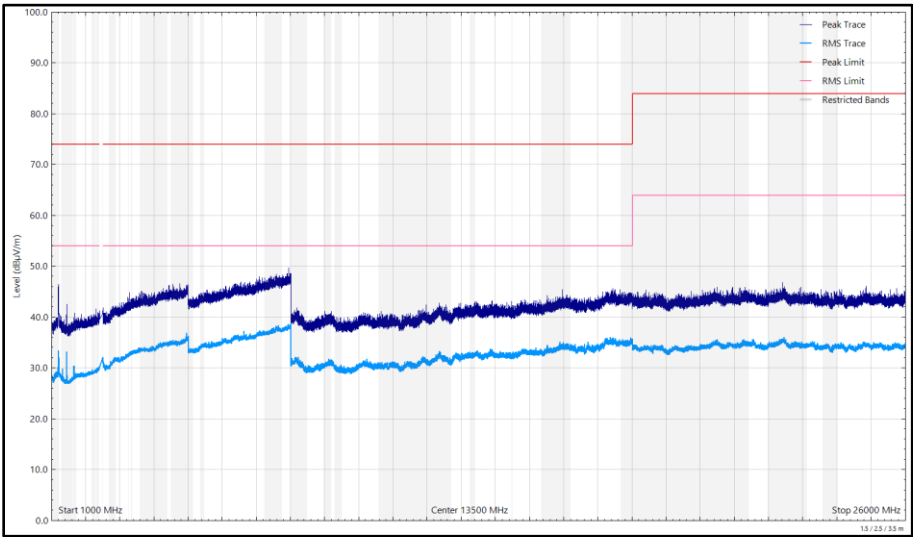


Figure 61 - 2475 MHz (CH25), Thread, iPA, Core 0, 1 GHz to 26 GHz, Vertical

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
1440.181	34.16	54.00	-19.84	RMS	31	153	Vertical
4008.303	36.91	54.00	-17.09	RMS	359	386	Vertical
4809.178	36.38	54.00	-17.62	RMS	355	313	Vertical

Table 46 - 2405 MHz (CH11), Thread, iPA, Core 1, 1 GHz to 26 GHz

No other emissions found within 10 dB of the limit.

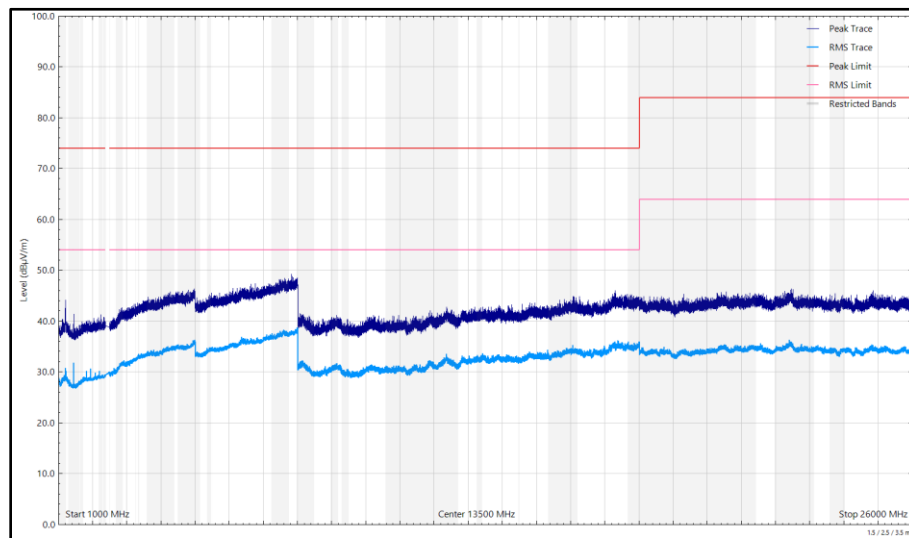


Figure 62 - 2405 MHz (CH11), Thread, iPA, Core 1, 1 GHz to 26 GHz, Horizontal

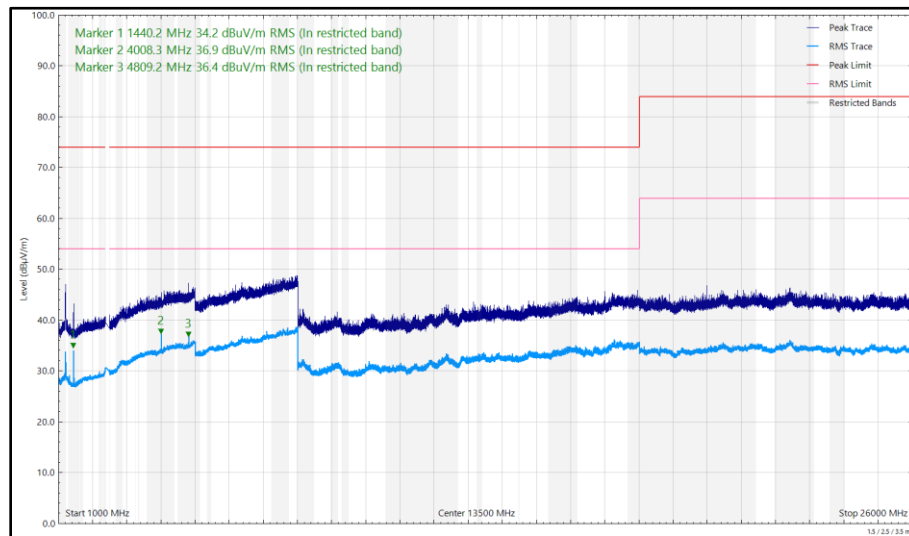


Figure 63 - 2405 MHz (CH11), Thread, iPA, Core 1, 1 GHz to 26 GHz, Vertical

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
108.008	33.35	43.50	-10.15	Q-Peak	0	287	Horizontal
111.935	33.74	43.50	-9.76	Q-Peak	92	100	Vertical
254.356	24.94	46.00	-21.06	Q-Peak	315	103	Vertical
327.101	29.46	46.00	-16.54	Q-Peak	85	100	Horizontal
4066.813	34.38	54.00	-19.62	RMS	0	193	Vertical

Table 47 - 2440 MHz (CH18), Thread, iPA, Core 1, 30 MHz to 26 GHz

No other emissions found within 10 dB of the limit.

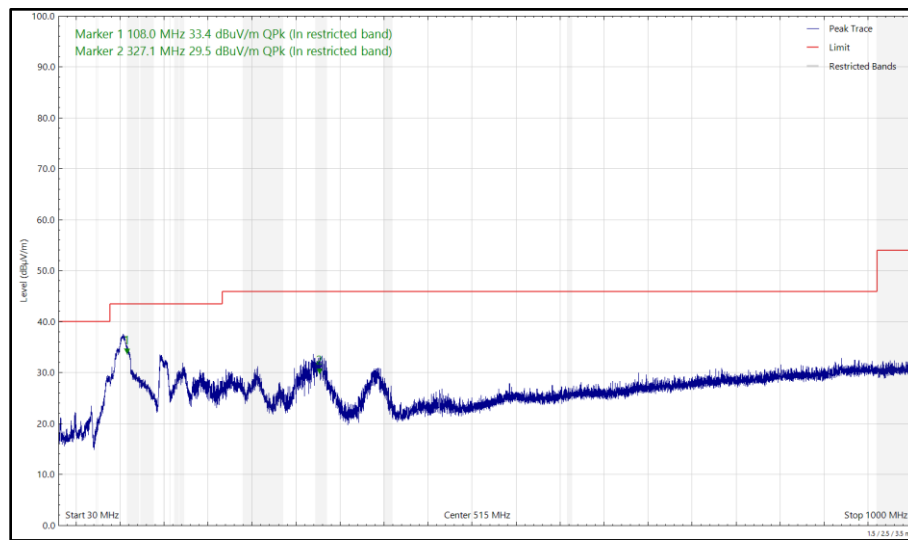


Figure 64 - 2440 MHz (CH18), Thread, iPA, Core 1, 30 MHz to 1 GHz, Horizontal (Peak)

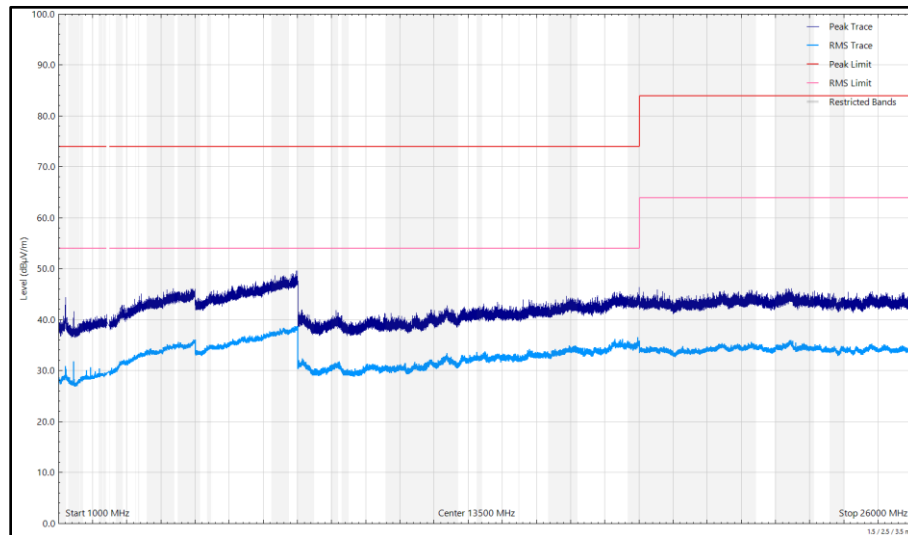


Figure 65 - 2440 MHz (CH18), Thread, iPA, Core 1, 1 GHz to 26 GHz, Horizontal

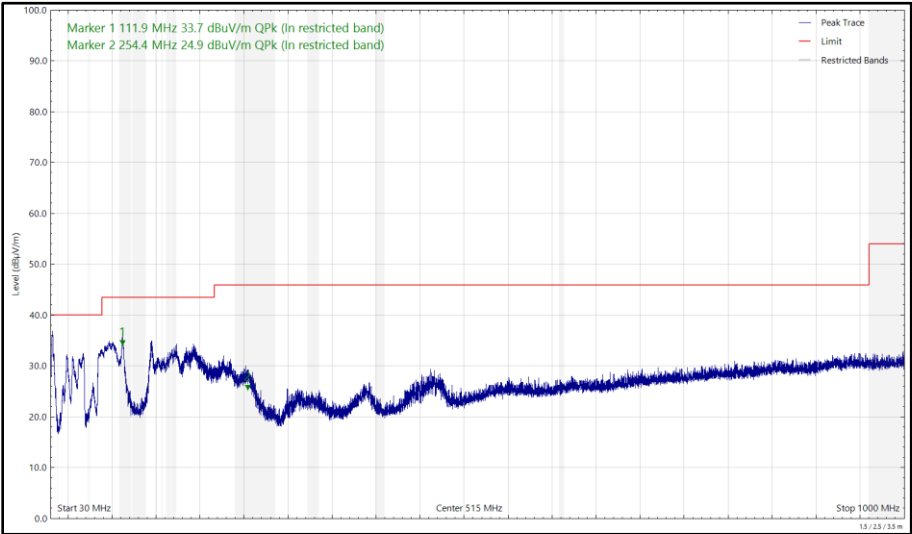


Figure 66 - 2440 MHz (CH18), Thread, iPA, Core 1, 30 MHz to 1 GHz, Vertical (Peak)

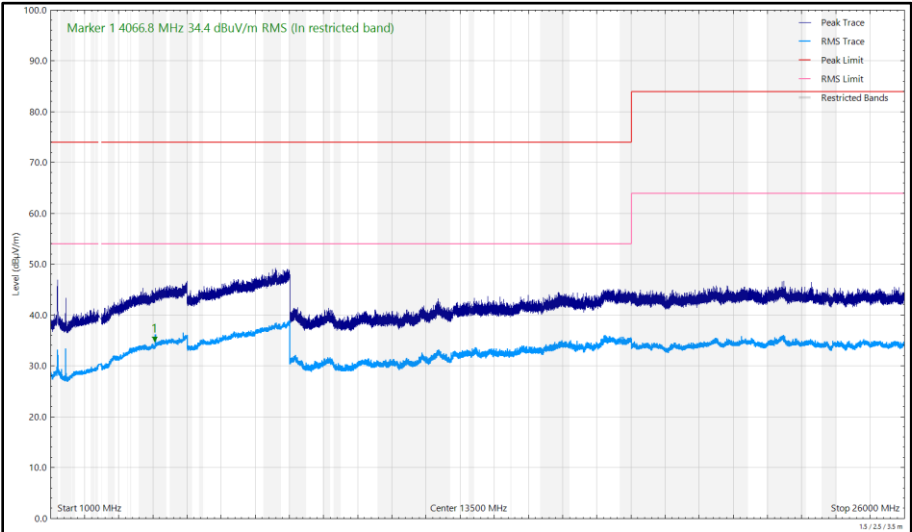


Figure 67 - 2440 MHz (CH18), Thread, iPA, Core 1, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 48 - 2475 MHz (CH25), Thread, iPA, Core 1, 1 GHz to 26 GHz

*No emissions found within 10 dB of the limit.

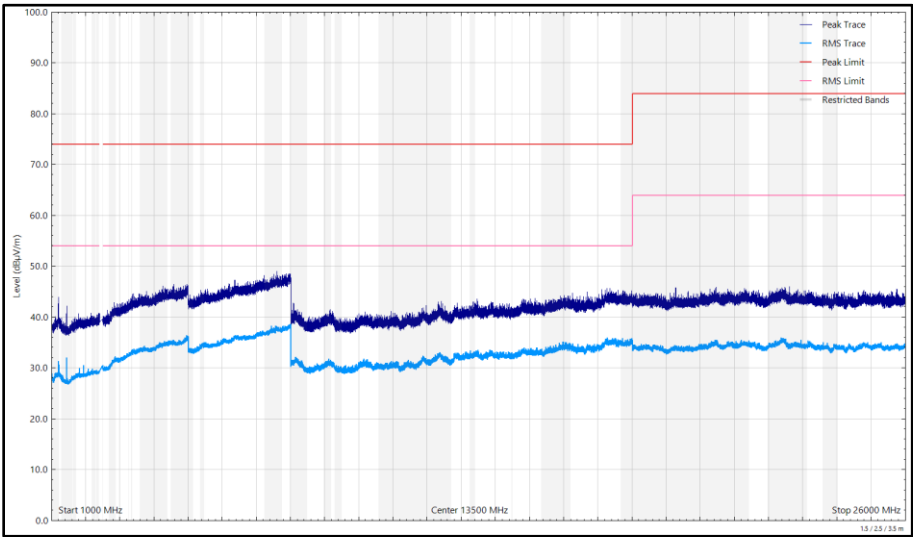


Figure 68 - 2475 MHz (CH25), Thread, iPA, Core 1, 1 GHz to 26 GHz, Horizontal

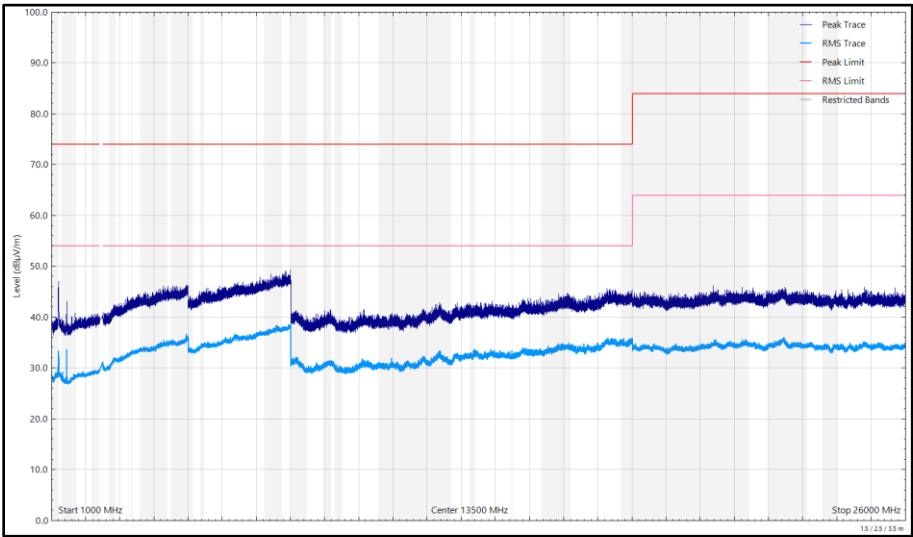


Figure 69 - 2475 MHz (CH25), Thread, iPA, Core 1, 1 GHz to 26 GHz, Vertical



FCC 47 CFR Part 15, Limit Clause 15.247 (d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in 15.209(a)

ISED RSS-247, Limit Clause 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

In addition, radiated emissions which fall in the restricted bands, as defined in RSS-GEN, clause 8.10, must also comply with the radiated emission limits specified in RSS-GEN clause 8.9.



2.5.8 Test Location and Test Equipment Used

This test was carried out in RF Chamber 14, RF Chamber 16 and RF Chamber 17.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Cable (18 GHz)	Rosenberger	LU7-071-1000	5102	12	21-Nov-2024
Emissions Software	TUV SUD	EmX V3.4.2	5125	-	Software
Antenna (DRG, 1 GHz to 10.5 GHz)	Schwarzbeck	BBHA9120B	5215	12	14-Jul-2025
EMI Test Receiver	Rohde & Schwarz	ESW44	5911	12	19-Sep-2025
EMI Test Receiver	Rohde & Schwarz	ESW44	5912	12	07-Aug-2025
TRILOG Super Broadband Test Antenna	Schwarzbeck	VULB 9168	5943	24	24-May-2026
1500W (300V 12A) AC Power Supply	iTech	IT7324	5955	-	O/P Mon
1500W (300V 12A) AC Power Supply	iTech	IT7324	5957	-	O/P Mon
5m Semi-Anechoic Chamber (Dual-Axis)	Albatross Projects	RF Chamber 14	5958	36	26-Apr-2025
Compact Antenna Mast	Maturo Gmbh	CAM4.0-P	5959	-	TU
Mast & Turntable Controller	Maturo Gmbh	FCU3.0	5960	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	5961	-	TU
Turntable	Maturo Gmbh	TT1.5SI	5962	-	TU
3m Semi-Anechoic Chamber, Chamber16	Albatross Projects	RF Chamber 16	5972	36	24-May-2025
Mast & Turntable Controller	Maturo Gmbh	FCU3.0	5973	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	5974	-	TU
Turntable	Maturo Gmbh	TT1.5SI	5975	-	TU
Cable (N to N 8m)	Junkosha	MWX221-0800NMSNMS/A	6006	12	20-May-2025
Cable (N to N 3m)	Junkosha	MWX221-0300NMSNMS/A	6025	12	20-May-2025
Digital Multimeter	Fluke	115	6146	12	06-Jun-2025
Digital Multimeter	Fluke	115	6147	12	06-Jun-2025
8GHz Highpass Filter	Wainwright	WHKX 7150 8000 18000 50SS	6194	12	23-Apr-2025
Pre Amp 8 - 18 GHz	Wright Technologies	APS06 0061	6200	12	03-Jun-2025
Attenuator 4dB	Pasternack	PE7074-4	6201	24	24-May-2026
Cable (SMA to SMA 20cm)	TUV SUD	MH-FH 8-18	6215	12	23-Apr-2025
EMI Test Receiver	Rohde & Schwarz	ESW44	6294	12	06-Jan-2025
USB Spectrum Analyser	Signal Hound	SA124B	6296	-	TU
USB Spectrum Analyser	Signal Hound	SA124B	6298	-	TU
Cable (K Type 2m)	Junkosha	MWX241-0200KMSKMS/B	6324	12	04-Feb-2025
Digital Multimeter	Fluke	115	6345	12	24-Jul-2025



Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Humidity and Temperature Meter	R.S Components	1364	6346	12	06-Mar-2025
SAC Switch Unit	TUV SUD	TUV_SSU_004 PLC	6349	12	07-May-2025
USB Spectrum Analyser	Signal Hound	SA124B	6383	-	TU
Horn Antenna (1–10.5 GHz)	Schwarzbeck	BBHA 9120 B	6457	12	05-May-2025
DRG Horn Antenna (8-18 GHz)	Schwarzbeck	HWRD750	6458	12	05-May-2025
AC Power Supply	iTech	IT7324	6657	-	O/P Mon
3m Semi-Anechoic Chamber	Albatross Projects	RF Chamber 17	6658	36	28-Jan-2026
Mast and Turntable Controller	Maturo Gmbh	FCU3.0	6659	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	6660	-	TU
Turntable	Maturo Gmbh	TT1.5SI	6661	-	TU
8m Cable	Junkosha	MWX221-08000AMSAMS/B	6748	12	01-Feb-2025
Double Ridge Active Horn Antenna (18-40 GHz)	Com-Power	AHA-840	6771	24	17-Jan-2025
8M SMA Cable	Junkosha	MWX221-08000AMSAMS/B	6833	12	14-Aug-2025
8M SMA Cable	Junkosha	MWX221-08000AMSAMS/B	6834	12	14-Aug-2025
Handheld Hygrometer	Fluke	971	6838	12	27-Aug-2025
Cable Assembly	SpecTech	PE300-60	6857	-	TU
Cable Assembly	SpecTech	PE300-60	6858	-	TU
Cable Assembly	SpecTech	PE300-60	6859	-	TU
Cable Assembly	SpecTech	PE300-60	6860	-	TU
Cable Assembly	SpecTech	PE300-60	6866	-	TU
Cable Assembly	SpecTech	PE300-60	6867	-	TU

Table 49

TU - Traceability Unscheduled

O/P Mon - Output Monitored using calibrated equipment



2.6 Power Spectral Density

2.6.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (e)
ISED RSS-247, Clause 5.2
ISED RSS-GEN, Clause 6.12

2.6.2 Equipment Under Test and Modification State

A3240, S/N: GVGH0F77DG - Modification State 0

2.6.3 Date of Test

25-November-2024

2.6.4 Test Method

This test was performed in accordance with ANSI C63.10, clause 11.10.5.

Where the EUT duty cycle was $< 98\%$ and repeatable within 2% , the spectrum analyser was set to trace (power) averaging and a duty cycle correction was added as calculated in the result tables below (Method AVGPS-2).

2.6.5 Environmental Conditions

Ambient Temperature	22.5 °C
Relative Humidity	54.5 %



2.6.6 Test Results

Thread

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.5
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	Thread iPA	Duty Cycle (%):	88.9
Data Rate:	-	DCCF (dB):	0.51
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	5.70
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2405	3.0	-10.62	-	-	-	-10.62	8.00	-18.62
2440	3.0	-10.46	-	-	-	-10.46	8.00	-18.46
2475	3.0	-10.77	-	-	-	-10.77	8.00	-18.77

Table 50 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.5
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	Thread ePA	Duty Cycle (%):	88.9
Data Rate:	-	DCCF (dB):	0.51
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	5.70
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2405	3.0	-2.65	-	-	-	-2.65	8.00	-10.65
2440	3.0	-2.27	-	-	-	-2.27	8.00	-10.27
2475	3.0	-2.19	-	-	-	-2.19	8.00	-10.19

Table 51 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.5
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	Thread iPA	Duty Cycle (%):	88.9
Data Rate:	-	DCCF (dB):	0.51
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	4.80
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2405	3.0	-	-10.26	-	-	-10.26	8.00	-18.26
2440	3.0	-	-10.42	-	-	-10.42	8.00	-18.42
2475	3.0	-	-10.43	-	-	-10.43	8.00	-18.43

Table 52 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.5
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	Thread ePA	Duty Cycle (%):	88.9
Data Rate:	-	DCCF (dB):	0.51
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	4.80
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2405	3.0	-	-2.26	-	-	-2.26	8.00	-10.26
2440	3.0	-	-2.24	-	-	-2.24	8.00	-10.24
2475	3.0	-	-1.83	-	-	-1.83	8.00	-9.83

Table 53 - Maximum Power Spectral Density Results



FCC 47 CFR Part 15, Limit Clause 15.247 (e)

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

ISED RSS-247, Limit Clause 5.2(b)

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

2.6.7 Test Location and Test Equipment Used

This test was carried out in RF Chamber 18.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
AC Programmable Power Supply	iTech	IT7324	5225	-	O/P Mon
MXA Signal Analyser	Keysight Technologies	N9020B	5529	24	13-Dec-2024
Digital Multimeter	Fluke	115	6145	12	06-Jun-2025
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	6426	12	07-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6752	12	06-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6753	12	06-Feb-2025
Handheld Hygrometer	Fluke	971	6838	12	27-Aug-2025

Table 54

O/P Mon - Output Monitored using calibrated equipment



3 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

Test Name	Measurement Uncertainty
Restricted Band Edges	30 MHz to 1 GHz: ± 5.2 dB 1 GHz to 40 GHz: ± 6.3 dB
Emission Bandwidth	± 88.86 kHz
Maximum Conducted Output Power	± 1.38 dB
Authorised Band Edges	30 MHz to 1 GHz: ± 5.2 dB 1 GHz to 40 GHz: ± 6.3 dB
Spurious Radiated Emissions	30 MHz to 1 GHz: ± 5.2 dB 1 GHz to 40 GHz: ± 6.3 dB
Power Spectral Density	± 1.49 dB

Table 55

Measurement Uncertainty Decision Rule – Accuracy Method

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115:2021, Clause 4.4.3 (Procedure 2). The measurement results are directly compared with the test limit to determine conformance with the requirements of the standard.

Risk: The uncertainty of measurement about the measured result is negligible with regard to the final pass/fail decision. The measurement result can be directly compared with the test limit to determine conformance with the requirement (compare IEC Guide 115). The level of risk to falsely accept and falsely reject items is further described in ILAC-G8.