

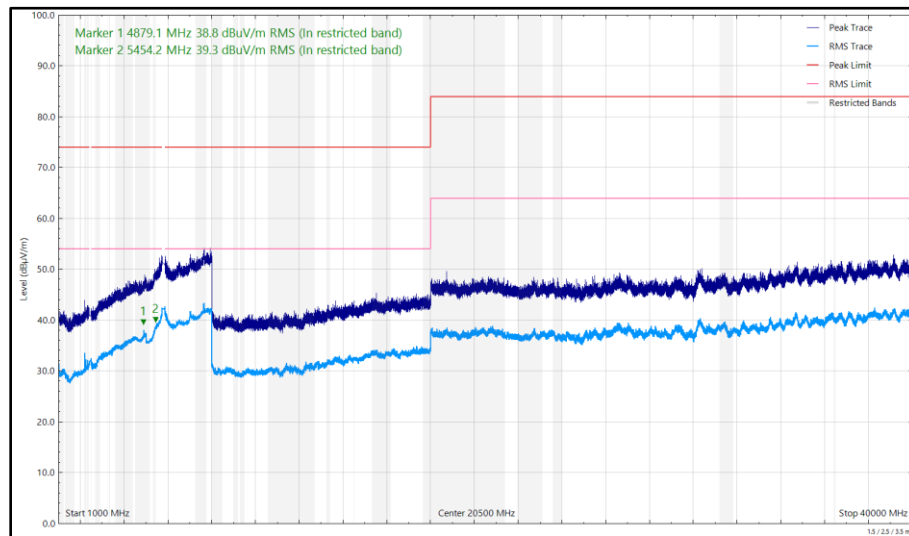


Figure 55 - U-NII-3 - 5785 MHz (CH157), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 0, 1 GHz to 40 GHz, Horizontal

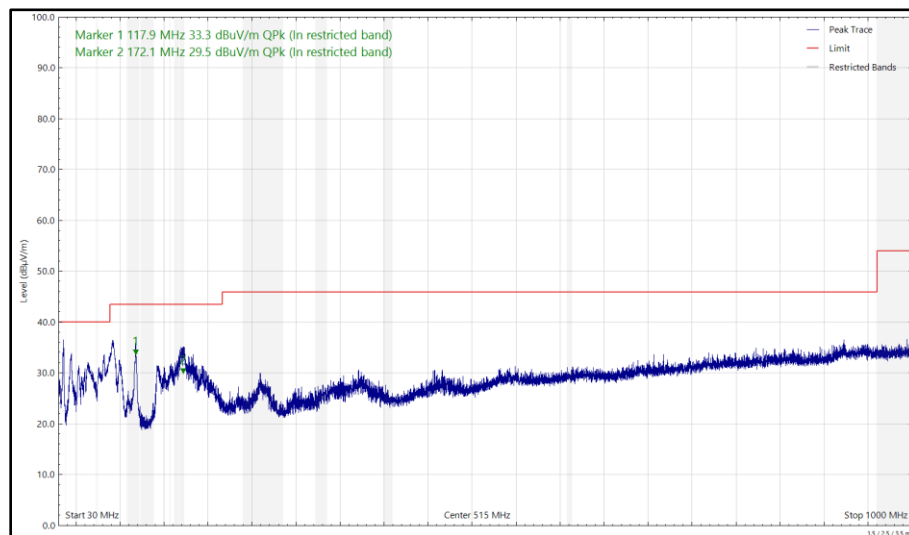


Figure 56 - U-NII-3 - 5785 MHz (CH157), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 0, 30 MHz to 1 GHz, Vertical (Peak)

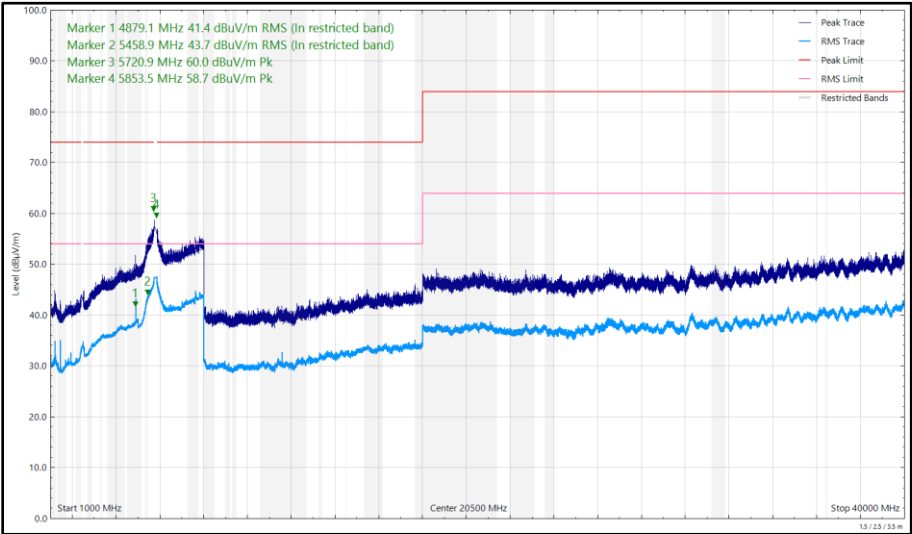


Figure 57 - U-NII-3 - 5785 MHz (CH157), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 0, 1 GHz to 40 GHz, Vertical

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
117.735	33.15	43.50	-10.35	Q-Peak	107	100	Vertical
118.273	28.87	43.50	-14.63	Q-Peak	143	272	Horizontal
169.402	30.44	43.50	-13.06	Q-Peak	183	100	Vertical
170.180	28.10	43.50	-15.40	Q-Peak	182	170	Horizontal
257.210	31.51	46.00	-14.49	Q-Peak	75	110	Horizontal
4880.868	39.76	54.00	-14.24	RMS	57	400	Horizontal
4880.918	41.91	54.00	-12.09	RMS	24	296	Vertical
5440.318	38.82	54.00	-15.18	RMS	296	376	Horizontal
5452.925	43.29	54.00	-10.71	RMS	324	265	Vertical
5720.525	60.42	74.00	-13.58	Peak	337	286	Vertical
5850.218	59.21	74.00	-14.79	Peak	340	287	Vertical

Table 23 - U-NII-3 - 5785 MHz (CH157), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 1, 30 MHz to 40 GHz

No other emissions found within 10 dB of the limit.

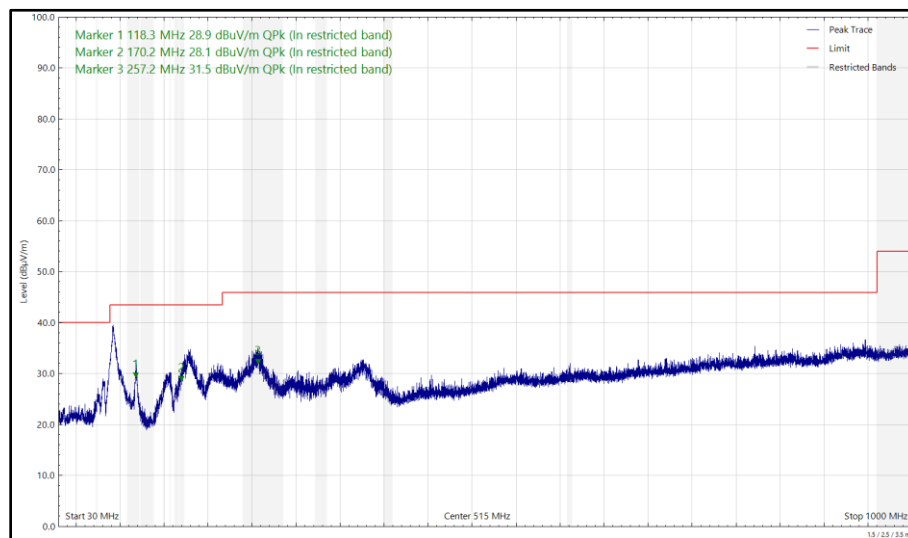


Figure 58 - U-NII-3 - 5785 MHz (CH157), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 1, 30 MHz to 1 GHz, Horizontal (Peak)

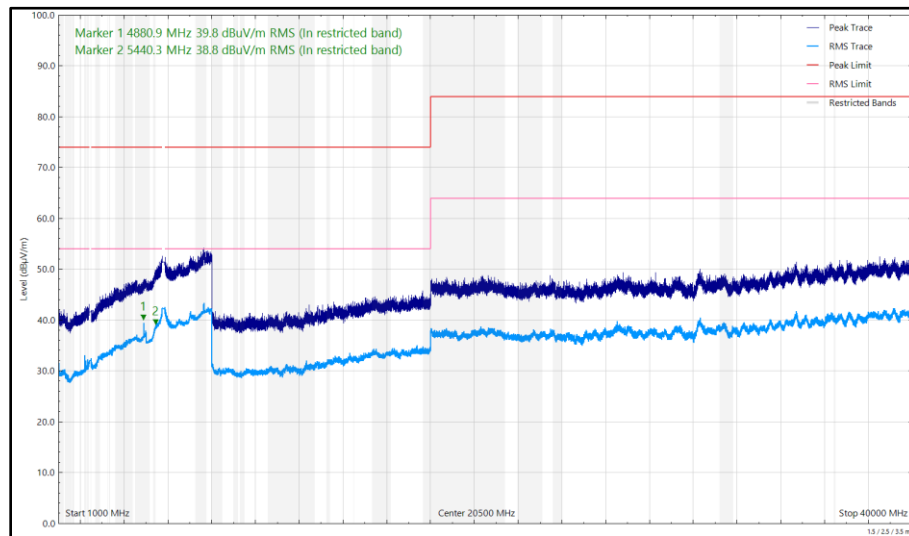


Figure 59 - U-NII-3 - 5785 MHz (CH157), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 1, 1 GHz to 40 GHz, Horizontal

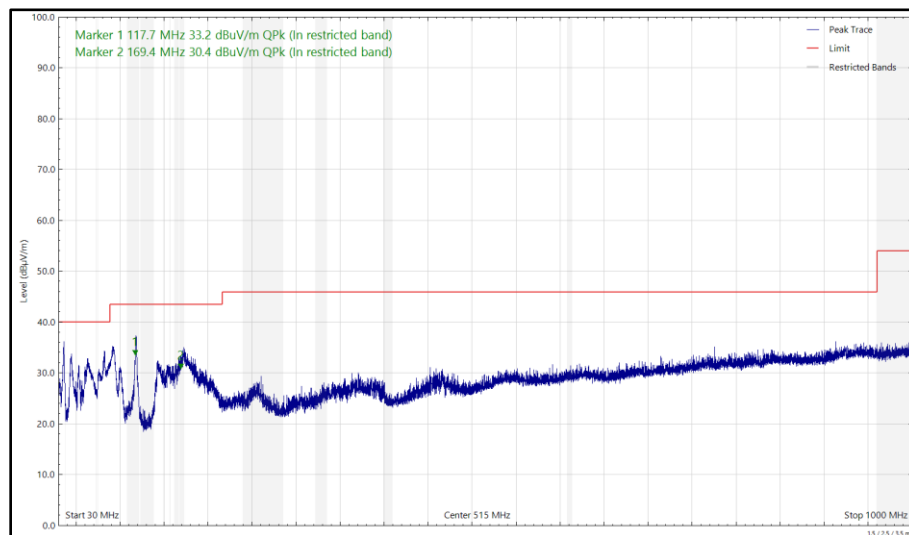


Figure 60 - U-NII-3 - 5785 MHz (CH157), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 1, 30 MHz to 1 GHz, Vertical (Peak)

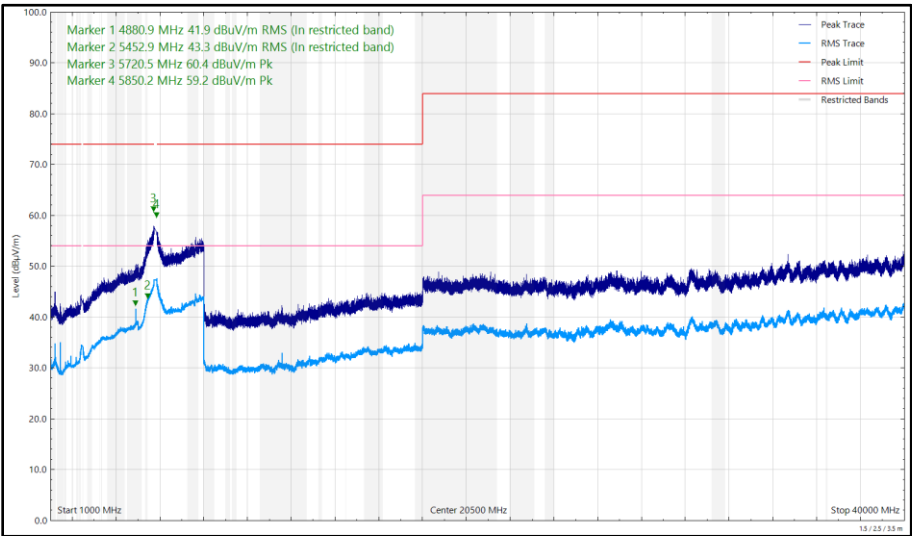


Figure 61 - U-NII-3 - 5785 MHz (CH157), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 1, 1 GHz to 40 GHz, Vertical

FCC 47 CFR Part 15, ISSED RSS-247 and ISSED RSS-GEN

The least stringent limit from the applicable rule parts was used to determine compliance for Radiated Emissions testing of multiple transmission sources.

The least stringent applicable limit was:

Clause	Limit
Part 15 247 (d) / RSS-247 Clause 5.5	-20 dBc
Part 15.407 (b) / RSS-247 Clause 6.2	-27 dBm e.i.r.p
Part 15.209 / RSS-GEN Clause 8.9	Peak: 74 dBμV/m at 3m, Average 54 dBμV/m at 3m (Restricted bands > 1 GHz)

Table 24

6 GHz WLAN and Thread

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
121.898	26.16	43.50	-17.34	Q-Peak	157	256	Horizontal
123.202	34.31	43.50	-9.19	Q-Peak	85	100	Vertical
156.790	24.03	43.50	-19.47	Q-Peak	0	245	Horizontal
172.679	27.73	43.50	-15.77	Q-Peak	0	111	Vertical
5445.112	35.46	54.00	-18.54	RMS	110	168	Horizontal
5454.351	39.05	54.00	-14.95	RMS	36	282	Vertical
7318.687	43.42	54.00	-10.58	RMS	304	273	Vertical
7321.293	41.75	54.00	-12.25	RMS	274	397	Horizontal
8233.315	34.82	54.00	-19.18	RMS	62	397	Horizontal
8233.320	39.88	54.00	-14.12	RMS	341	234	Vertical

Table 25 - U-NII-5 - 6175 MHz (CH45), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 0, 30 MHz to 40 GHz

No other emissions found within 10 dB of the limit.

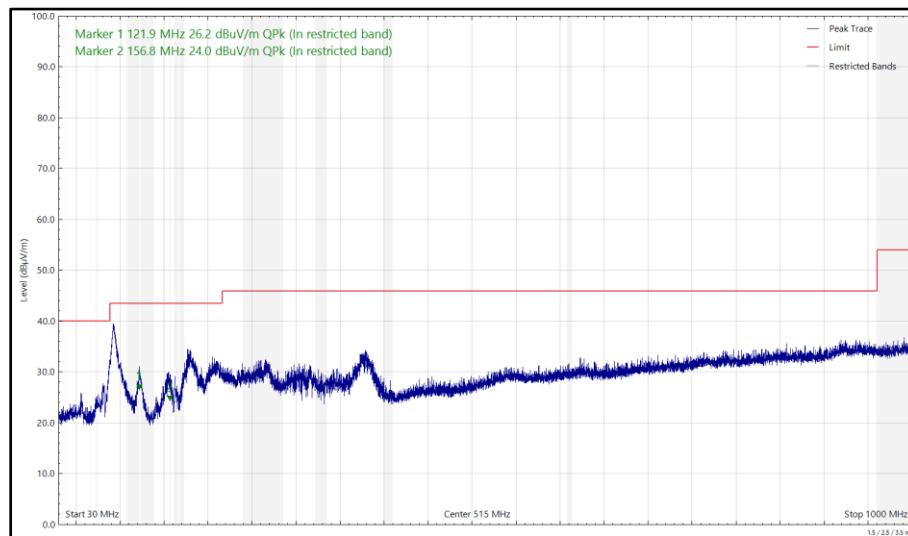


Figure 62 - U-NII-5 - 6175 MHz (CH45), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 0, 30 MHz to 1 GHz, Horizontal (Peak)

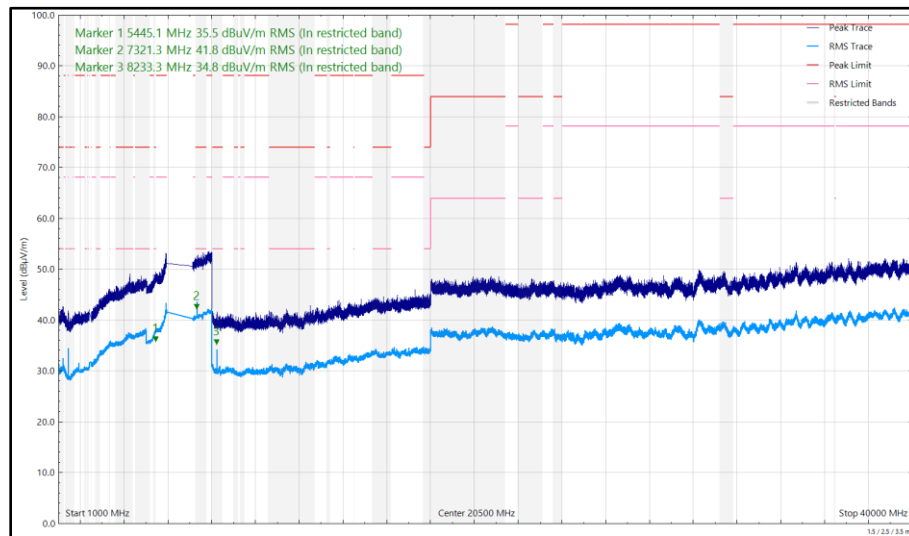


Figure 63 - U-NII-5 - 6175 MHz (CH45), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 0, 1 GHz to 40 GHz, Horizontal

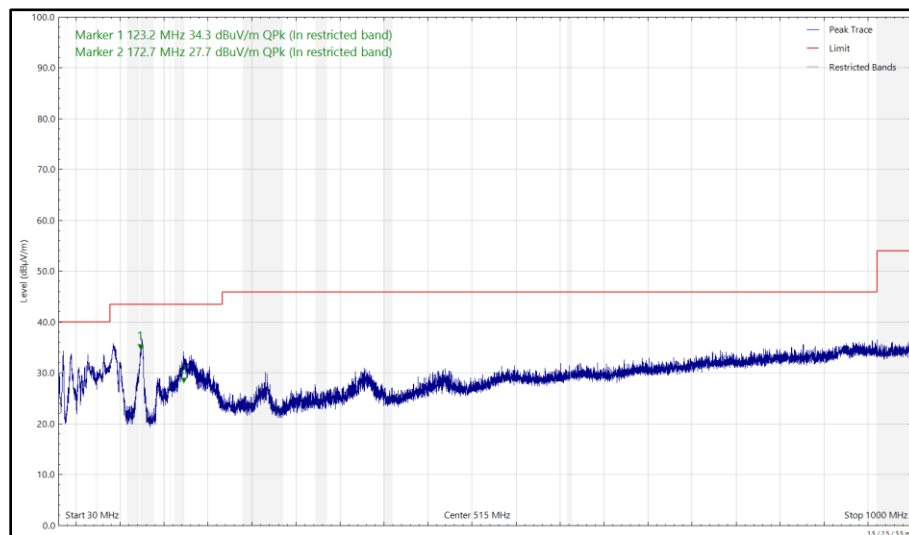


Figure 64 - U-NII-5 - 6175 MHz (CH45), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 0, 30 MHz to 1 GHz, Vertical (Peak)

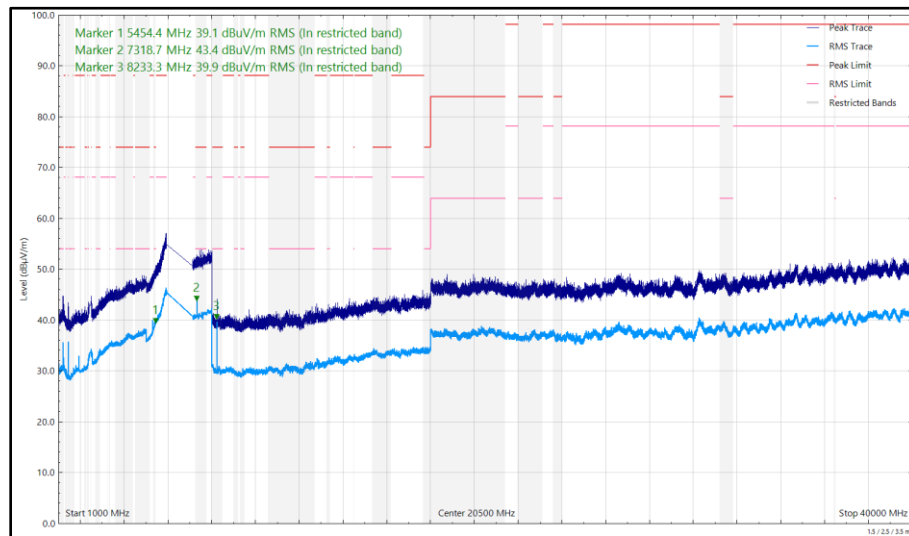


Figure 65 - U-NII-5 - 6175 MHz (CH45), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 0, 1 GHz to 40 GHz, Vertical

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
123.027	24.79	43.50	-18.71	Q-Peak	353	127	Vertical
127.138	24.04	43.50	-19.46	Q-Peak	234	259	Horizontal
172.520	26.75	43.50	-16.75	Q-Peak	220	248	Horizontal
172.955	27.94	43.50	-15.56	Q-Peak	170	100	Vertical
2389.667	36.18	54.00	-17.82	RMS	11	399	Vertical
4879.168	41.22	54.00	-12.78	RMS	8	291	Vertical
5438.712	35.39	54.00	-18.61	RMS	348	161	Horizontal
5450.439	39.23	54.00	-14.77	RMS	330	286	Vertical
7318.624	43.82	54.00	-10.18	RMS	299	249	Vertical
7318.666	42.52	54.00	-11.48	RMS	285	354	Horizontal
8233.310	39.93	54.00	-14.07	RMS	327	238	Vertical

Table 26 - U-NII-5 - 6175 MHz (CH45), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 1, 30 MHz to 40 GHz

No other emissions found within 10 dB of the limit.

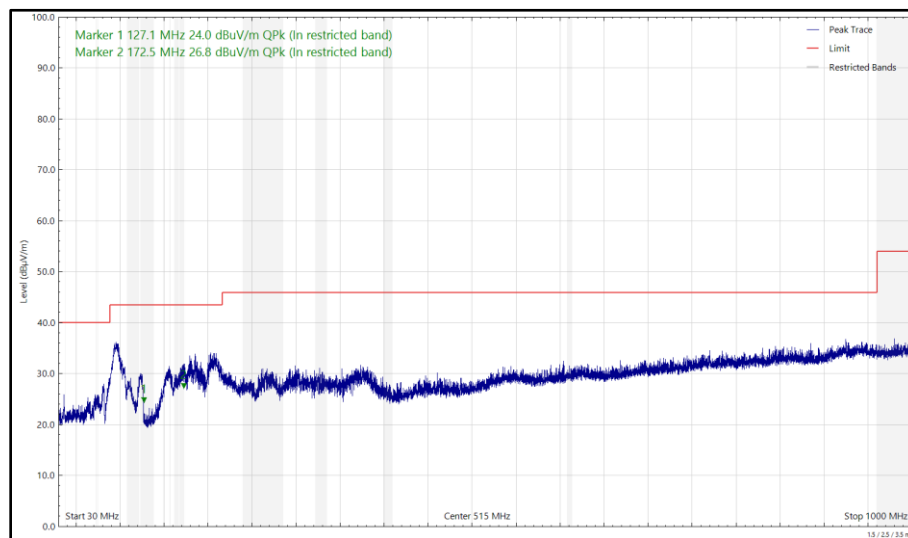


Figure 66 - U-NII-5 - 6175 MHz (CH45), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 1, 30 MHz to 1 GHz, Horizontal (Peak)

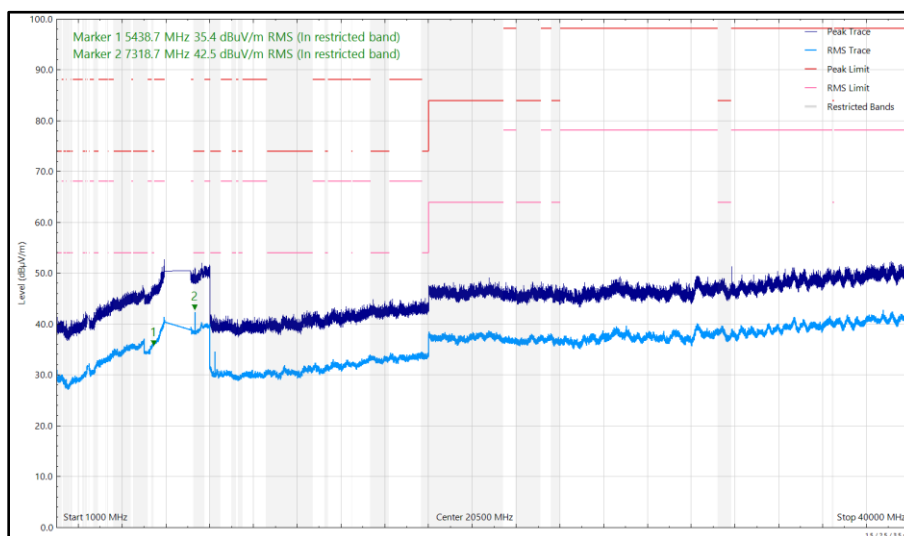


Figure 67 - U-NII-5 - 6175 MHz (CH45), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 1, 1 GHz to 40 GHz, Horizontal

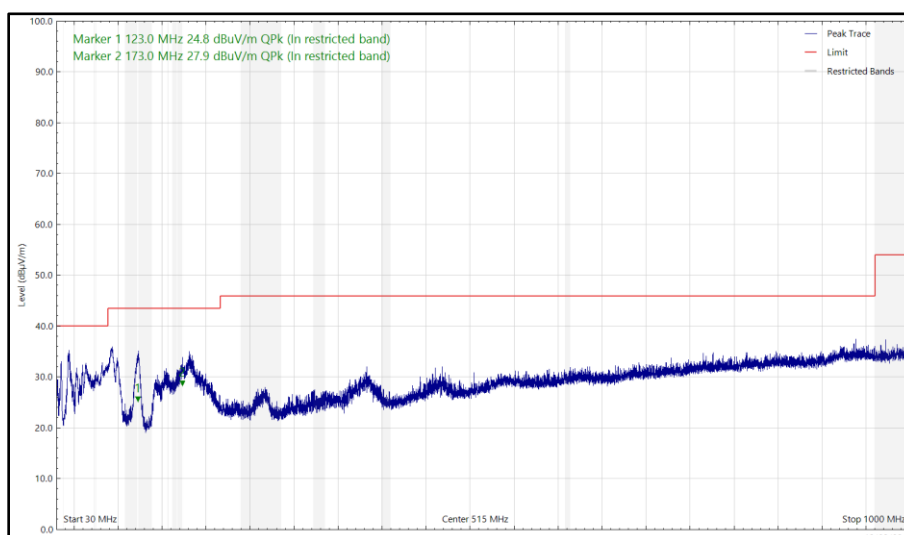


Figure 68 - U-NII-5 - 6175 MHz (CH45), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 1, 30 MHz to 1 GHz, Vertical (Peak)

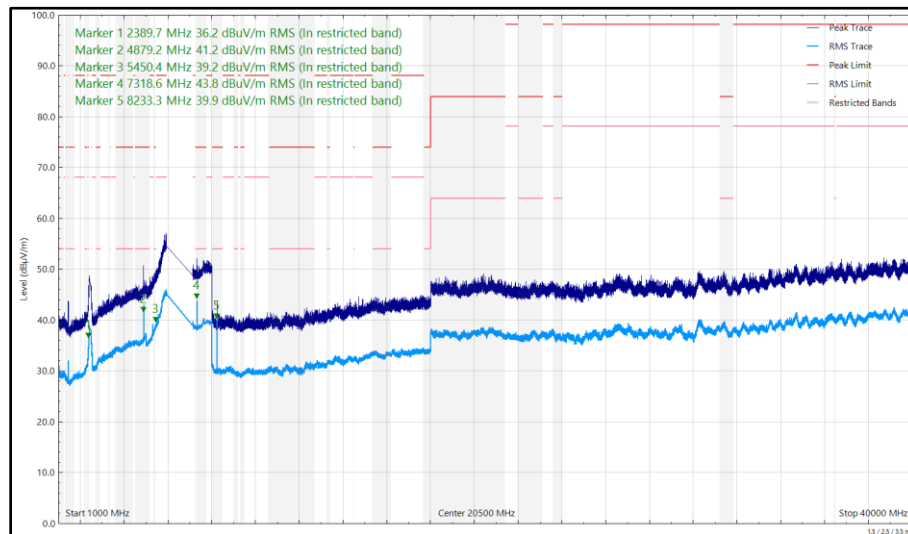


Figure 69 - U-NII-5 - 6175 MHz (CH45), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 1, 1 GHz to 40 GHz, Vertical

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
117.752	35.92	43.50	-7.58	Q-Peak	164	279	Horizontal
117.908	35.45	43.50	-8.05	Q-Peak	89	100	Vertical
126.381	31.85	43.50	-11.65	Q-Peak	129	110	Vertical
269.203	28.64	46.00	-17.36	Q-Peak	309	117	Horizontal
5376.288	38.26	54.00	-15.74	RMS	185	277	Horizontal
5459.805	39.24	54.00	-14.76	RMS	336	273	Vertical
7318.570	44.13	54.00	-9.87	RMS	303	241	Vertical
7318.654	43.11	54.00	-10.89	RMS	77	387	Horizontal

Table 27 - U-NII-8 - 6995 MHz (CH209), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 0, 30 MHz to 40 GHz

No other emissions found within 10 dB of the limit.

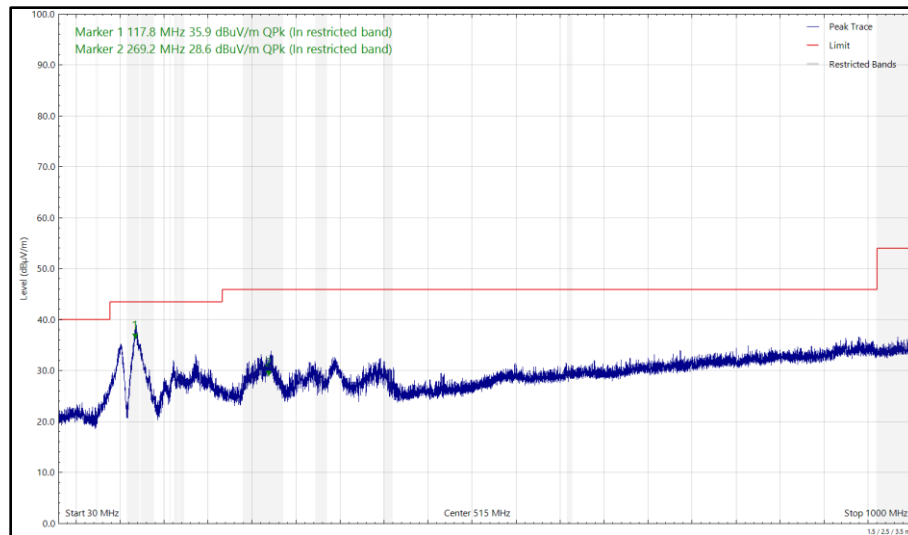


Figure 70 - U-NII-8 - 6995 MHz (CH209), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 0, 30 MHz to 1 GHz, Horizontal (Peak)

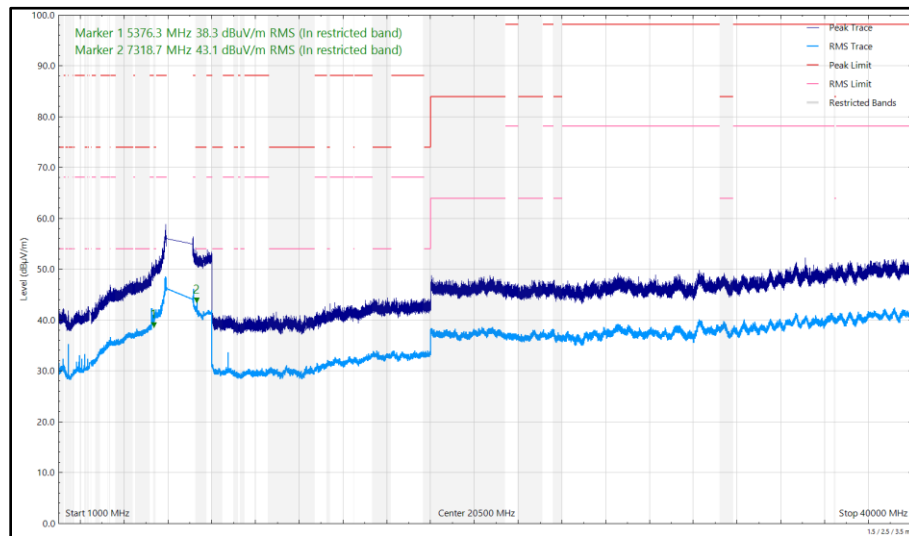


Figure 71 - U-NII-8 - 6995 MHz (CH209), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 0, 1 GHz to 40 GHz, Horizontal

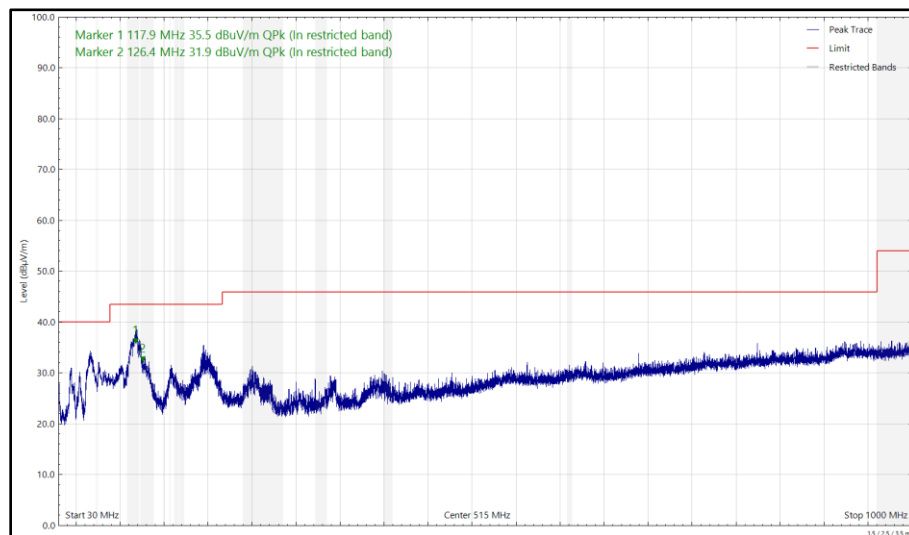


Figure 72 - U-NII-8 - 6995 MHz (CH209), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 0, 30 MHz to 1 GHz, Vertical (Peak)

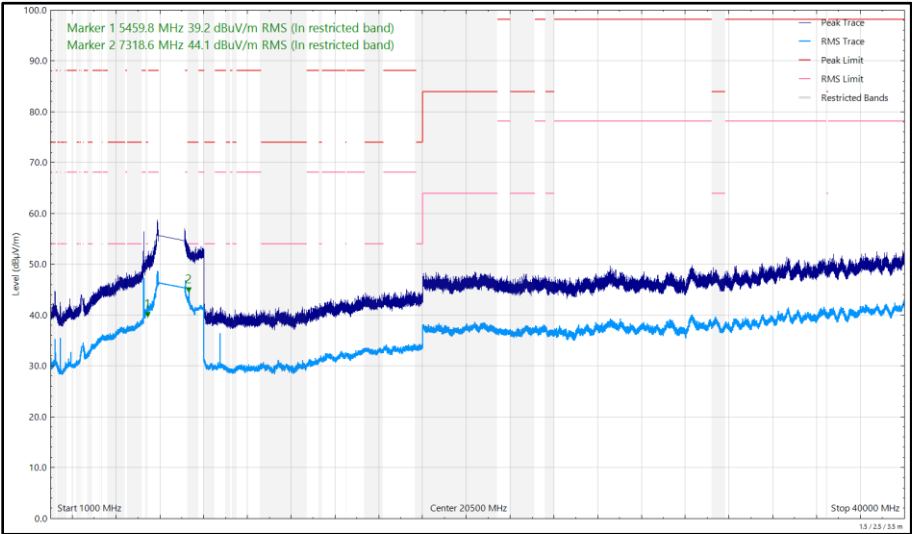


Figure 73 - U-NII-8 - 6995 MHz (CH209), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 0, 1 GHz to 40 GHz, Vertical

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
118.059	33.77	43.50	-9.73	Q-Peak	59	106	Vertical
118.139	35.76	43.50	-7.74	Q-Peak	184	283	Horizontal
127.464	32.64	43.50	-10.86	Q-Peak	113	100	Vertical
2379.729	36.53	54.00	-17.47	RMS	7	318	Vertical
2483.511	36.58	54.00	-17.42	RMS	28	333	Vertical
4880.893	43.57	54.00	-10.43	RMS	3	323	Vertical
5379.868	38.18	54.00	-15.82	RMS	2	100	Horizontal
5459.943	38.33	54.00	-15.67	RMS	235	103	Vertical
7318.571	40.33	54.00	-13.67	RMS	61	100	Vertical

Table 28 - U-NII-8 - 6995 MHz (CH209), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 1, 30 MHz to 40 GHz

No other emissions found within 10 dB of the limit.

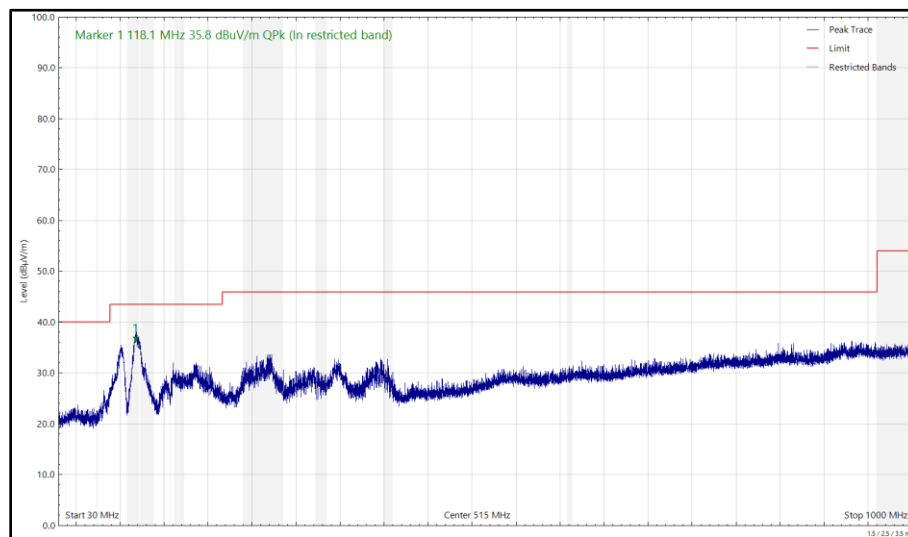


Figure 74 - U-NII-8 - 6995 MHz (CH209), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 1, 30 MHz to 1 GHz, Horizontal (Peak)

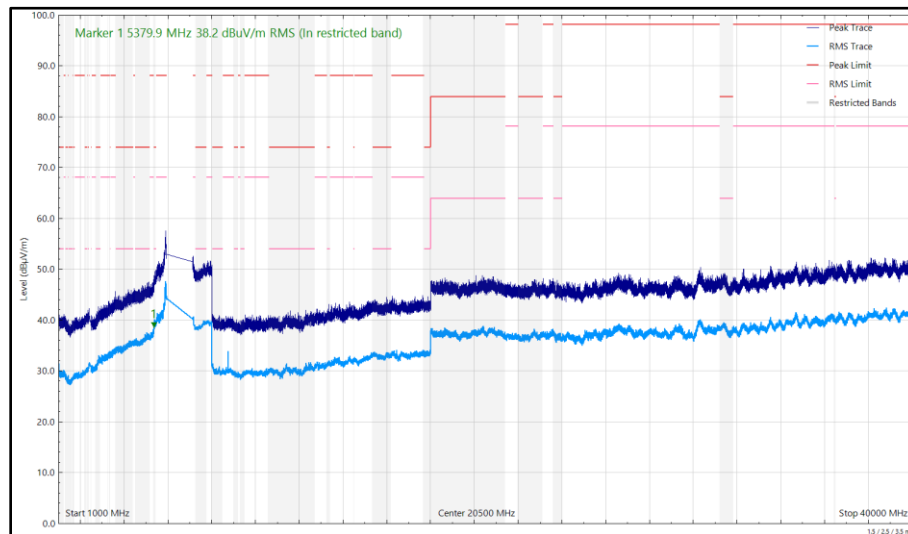


Figure 75 - U-NII-8 - 6995 MHz (CH209), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 1, 1 GHz to 40 GHz, Horizontal

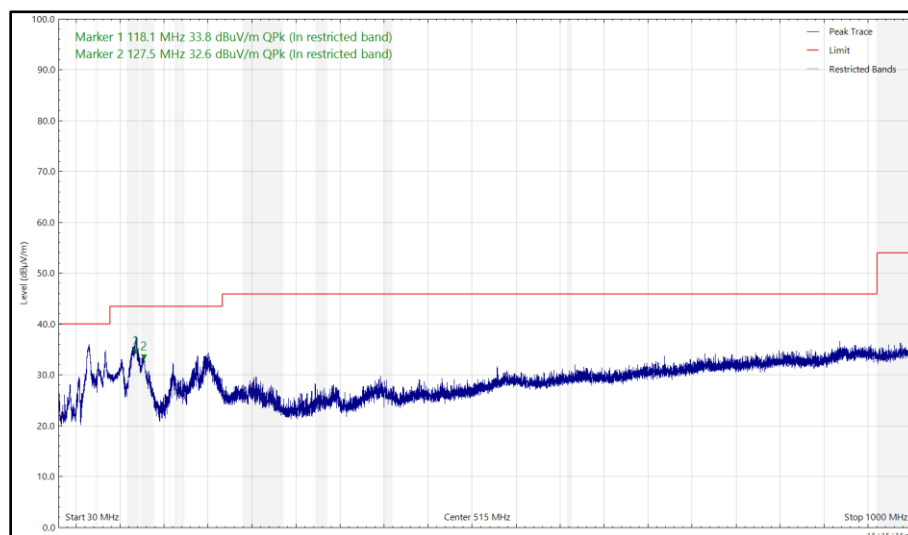


Figure 76 - U-NII-8 - 6995 MHz (CH209), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 1, 30 MHz to 1 GHz, Vertical (Peak)

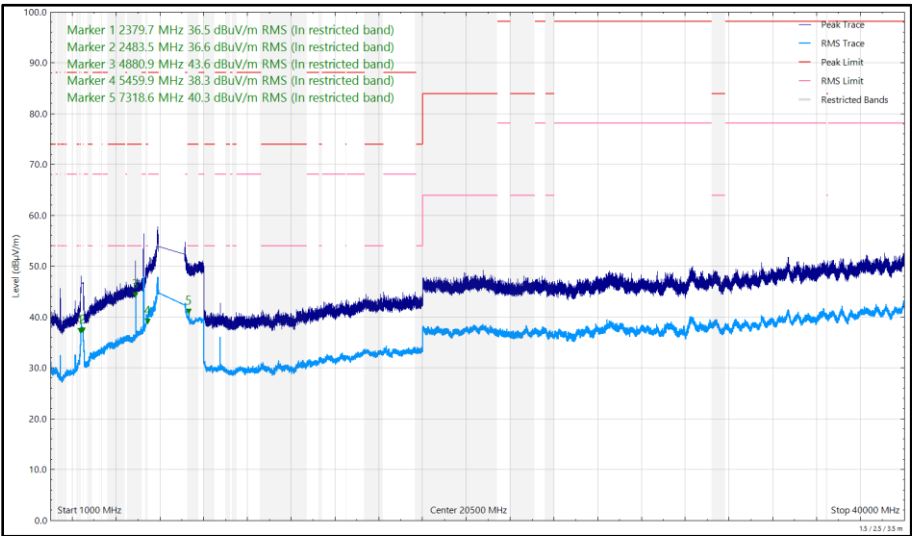


Figure 77 - U-NII-8 - 6995 MHz (CH209), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 1, 1 GHz to 40 GHz, Vertical

FCC 47 CFR Part 15, ISSED RSS-247, ISSED RSS-248 and ISSED RSS-GEN

The least stringent limit from the applicable rule parts was used to determine compliance for Radiated Emissions testing of multiple transmission sources.

The least stringent applicable limit was:

Clause	Limit
Part 15 247 (d) / RSS-247 Clause 5.5	-20 dBc
Part 15.407 (b) / RSS-248 Clause 4.6.2	Peak: -7 dBm/MHz e.i.r.p, Average: -27 dBm/MHz e.i.r.p.
Part 15.209 / RSS-GEN Clause 8.9	Peak: 74 dBμV/m at 3m, Average 54 dBμV/m at 3m (Restricted bands > 1 GHz)

Table 29



2.1.8 Test Location and Test Equipment Used

This test was carried out in RF Chamber 14 and RF Chamber 15.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Emissions Software	TUV SUD	EmX V3.4.2	5125	-	Software
Antenna (DRG, 1 GHz to 10.5 GHz)	Schwarzbeck	BBHA9120B	5215	12	14-Jul-2025
EMI Test Receiver	Rohde & Schwarz	ESW44	5911	12	19-Sep-2025
Cable (K Type 2m)	Junkosha	MWX241-02000KMSKMS/B	5937	12	10-Jun-2025
DRG Horn Antenna (7.5-18GHz)	Schwarzbeck	HWRD750	5940	12	05-May-2025
TRILOG Super Broadband Test Antenna	Schwarzbeck	VULB 9168	5943	24	24-May-2026
TRILOG Super Broadband Test Antenna	Schwarzbeck	VULB 9168	5944	24	24-May-2026
1500W (300V 12A) AC Power Supply	iTech	IT7324	5955	-	O/P Mon
1500W (300V 12A) AC Power Supply	iTech	IT7324	5956	-	O/P Mon
5m Semi-Anechoic Chamber (Dual-Axis)	Albatross Projects	RF Chamber 14	5958	36	26-Apr-2025
Compact Antenna Mast	Maturo Gmbh	CAM4.0-P	5959	-	TU
Mast & Turntable Controller	Maturo Gmbh	FCU3.0	5960	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	5961	-	TU
Turntable	Maturo Gmbh	TT1.5SI	5962	-	TU
5m Semi-Anechoic Chamber (Dual-Axis), Chamber 15	Albatross Projects	RF Chamber 15	5963	36	28-Apr-2025
Compact Antenna Mast	Maturo Gmbh	CAM4.0-P	5964	-	TU
Mast & Turntable Controller	Maturo Gmbh	FCU3.0	5966	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	5967	-	TU
Turntable	Maturo Gmbh	TT1.5SI	5968	-	TU
Cable (N to N 1m)	Junkosha	MWX221-01000NMSNMS/B	5999	12	20-May-2025
Cable (N to N 7m)	Junkosha	MWX221-07000NMSNMS/B	6005	12	20-May-2025
Cable (N to N 8m)	Junkosha	MWX221-08000NMSNMS/A	6006	12	20-May-2025
Cable (SMA to SMA 1m)	Junkosha	MWX221-01000AMSAMS/A	6007	12	20-May-2025
Cable (SMA to SMA 1m)	Junkosha	MWX221-01000AMSAMS/A	6008	12	20-May-2025
Cable (N to N 3m)	Junkosha	MWX221-03000NMSNMS/A	6025	12	20-May-2025
Horn Antenna (1-10.5 GHz)	Schwarzbeck	BBHA9120B	6140	12	05-May-2025
Horn Antenna (1-10 GHz)	Schwarzbeck	BBHA9120B	6141	12	05-May-2025
Digital Multimeter	Fluke	115	6146	12	06-Jun-2025



Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Digital Multimeter	Fluke	115	6147	12	06-Jun-2025
Double Ridge Active Horn Antenna (18-40 GHz)	Com-Power	AHA-840	6188	24	31-Jul-2026
SAC Switch Unit	TUV SUD	TUV_SSU_001	6190	12	22-Dec-2024
SAC Switch Unit	TUV SUD	TUV_SSU_001	6191	12	18-Dec-2024
8GHz Highpass Filter	Wainwright	WHKX 7150 8000 18000 50SS	6195	12	23-Apr-2025
Pre Amp 8 - 18 GHz	Wright Technologies	APS06 0061	6198	12	03-Jun-2025
Attenuator 4dB	Pasternack	PE7074-4	6201	24	24-May-2026
Attenuator 4dB	Pasternack	PE7074-4	6203	24	24-May-2026
Attenuator 4dB	Pasternack	PE7074-4	6204	24	20-Jun-2026
Cable (SMA to SMA 20cm)	TUV SUD	MH-FH 8-18	6214	12	23-Apr-2025
USB Spectrum Analyser	Signal Hound	SA124B	6296	-	TU
USB Spectrum Analyser	Signal Hound	SA124B	6297	-	TU
Cable (K Type 2m)	Junkosha	MWX241-02000KMSKMS/B	6323	12	04-Feb-2025
EMC Test Receiver	Rohde & Schwarz	ESW44	6333	12	16-Feb-2025
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9168	6456	24	10-Feb-2025
1m Cable	Junkosha	MWX241-01000AMSAMS/B	6740	12	01-Feb-2025
1m Cable	Junkosha	MWX241-01000AMSAMS/B	6741	12	01-Feb-2025
6.5m Cable	Junkosha	MWX221-06500AMSAMS/B	6744	12	01-Feb-2025
EMI Test Receiver	Rohde & Schwarz	ESW44	6805	12	29-May-2025
1M SMA Cable	Junkosha	MWX221-01000AMSAMS/B	6832	12	14-Aug-2025
8M SMA Cable	Junkosha	MWX221-08000AMSAMS/B	6834	12	14-Aug-2025
Handheld Hygrometer	Fluke	971	6837	12	27-Aug-2025
Handheld Hygrometer	Fluke	971	6838	12	27-Aug-2025
8m SMA-Type Cable	Junkosha	MWX221-08000AMSAMS/B	6849	12	15-Nov-2025
8m SMA-Type Cable	Junkosha	MWX221-08000AMSAMS/B	6851	12	15-Nov-2025
Cable Assembly	SpecTech	PE300-60	6856	-	TU
Cable Assembly	SpecTech	PE300-60	6866	-	TU
Cable Assembly	SpecTech	PE300-60	6867	-	TU
Cable Assembly	SpecTech	PE300-60	6868	-	TU

Table 30

TU - Traceability Unscheduled
O/P Mon - Output Monitored using calibrated equipment



3 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

Test Name	Measurement Uncertainty
Radiated Spurious Emissions (Simultaneous Transmission)	30 MHz to 1 GHz: ± 5.2 dB 1 GHz to 40 GHz: ± 6.3 dB

Table 31

Measurement Uncertainty Decision Rule – Accuracy Method

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115:2021, Clause 4.4.3 (Procedure 2). The measurement results are directly compared with the test limit to determine conformance with the requirements of the standard.

Risk: The uncertainty of measurement about the measured result is negligible with regard to the final pass/fail decision. The measurement result can be directly compared with the test limit to determine conformance with the requirement (compare IEC Guide 115). The level of risk to falsely accept and falsely reject items is further described in ILAC-G8.