

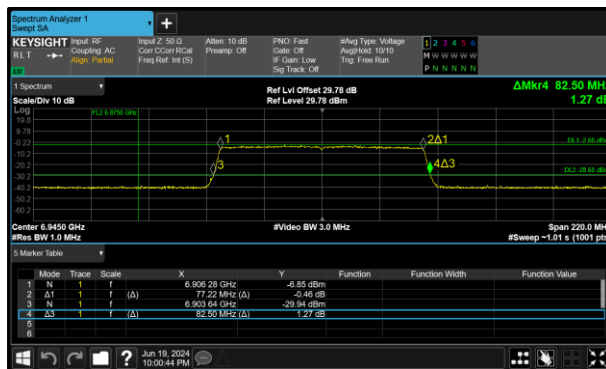


Figure 65 - 802.11ax HE80 SU LPI Minimum 26 dB EBW

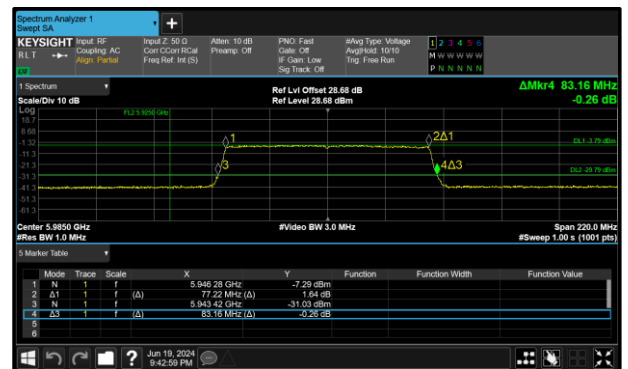


Figure 66 - 802.11ax HE80 SU LPI Maximum 26 dB EBW

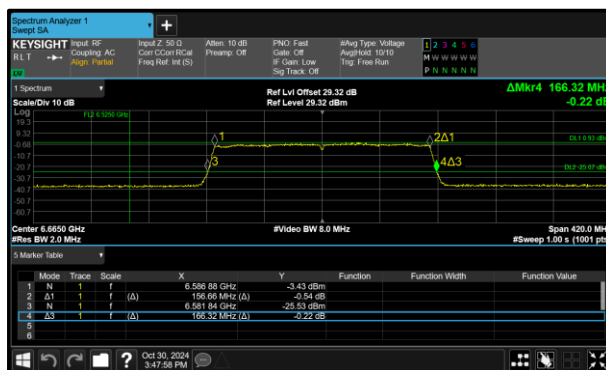


Figure 67 - 802.11ax HE160 SU LPI Minimum 26 dB EBW

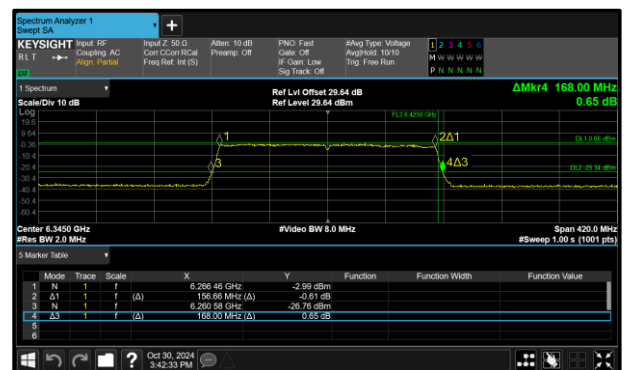


Figure 68 - 802.11ax HE160 SU LPI Maximum 26 dB EBW

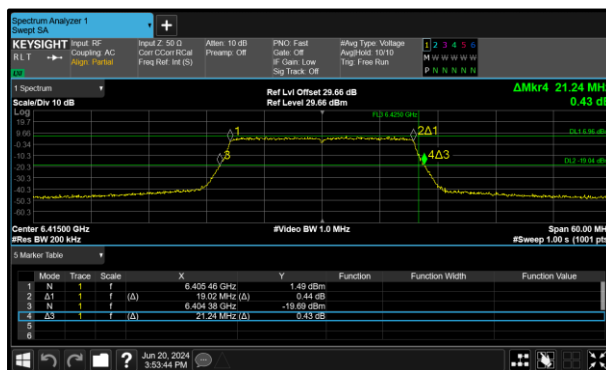


Figure 69 - 802.11ax HE20 SU SP Minimum 26 dB EBW

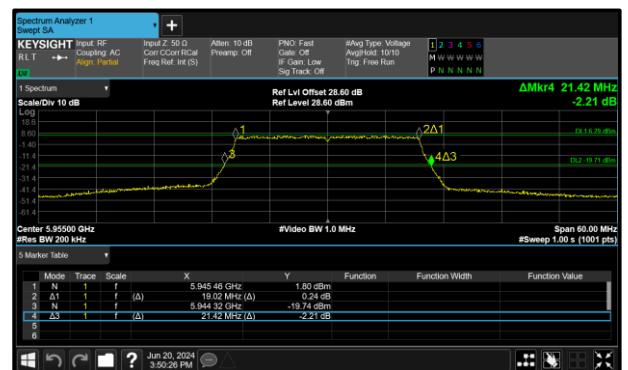


Figure 70 - 802.11ax HE20 SU SP Maximum 26 dB EBW

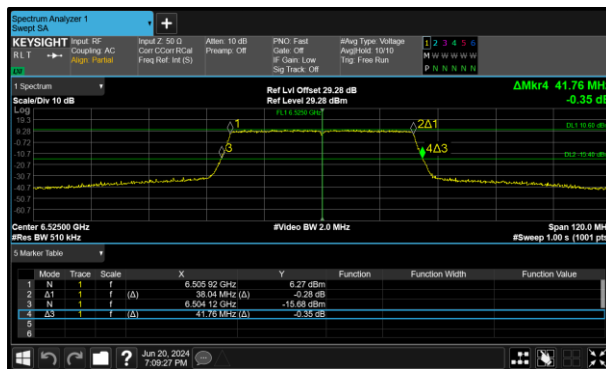


Figure 71 - 802.11ax HE40 SU SP Minimum 26 dB EBW

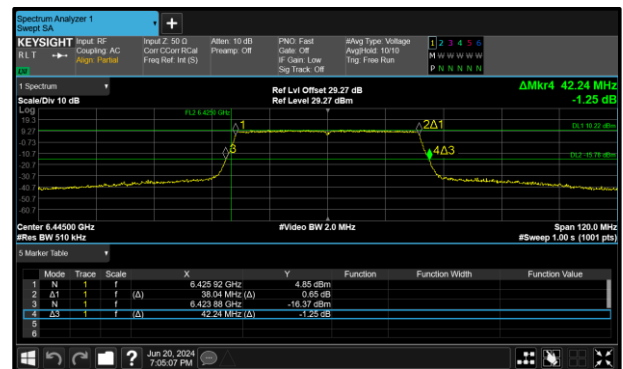


Figure 72 - 802.11ax HE40 SU SP Maximum 26 dB EBW

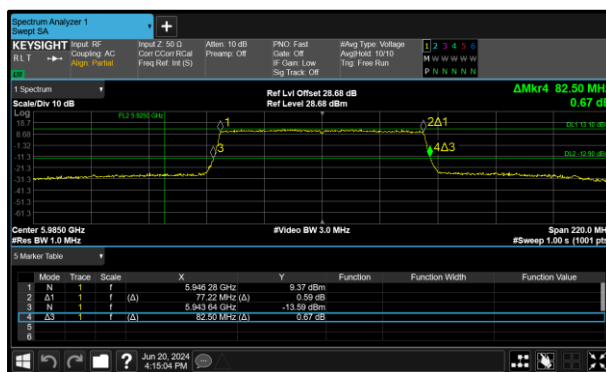


Figure 73 - 802.11ax HE80 SU SP Minimum 26 dB EBW

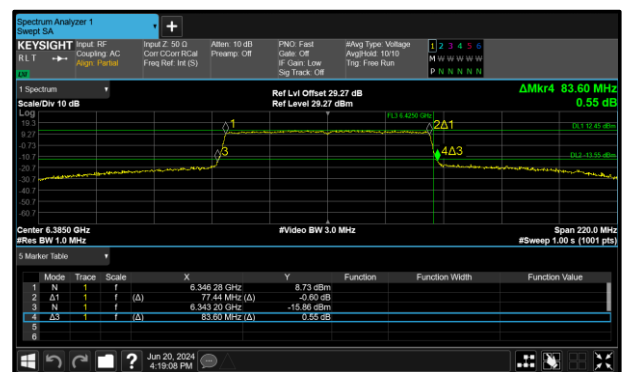


Figure 74 - 802.11ax HE80 SU SP Maximum 26 dB EBW

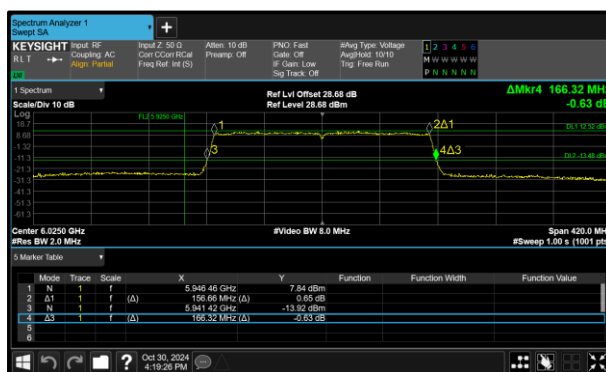


Figure 75 - 802.11ax HE160 SU SP Minimum 26 dB EBW

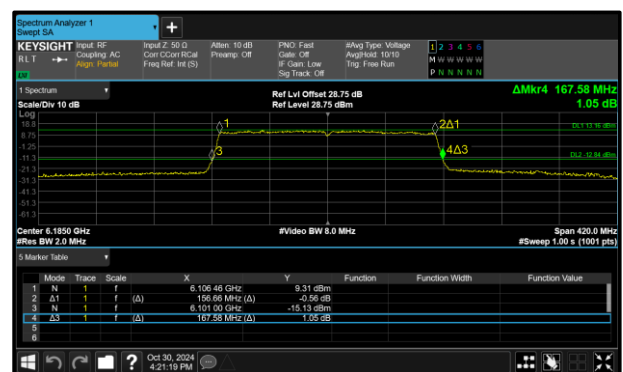


Figure 76 - 802.11ax HE160 SU SP Maximum 26 dB EBW



Protocol	99% Bandwidth (MHz)	
	Minimum	Maximum
802.11ax HE20 SU LPI	19.080	19.140
802.11ax HE40 SU LPI	37.920	38.160
802.11ax HE80 SU LPI	77.000	77.440
802.11ax HE160 SU LPI	156.240	156.660
802.11ax HE20 SU SP	19.020	19.020
802.11ax HE40 SU SP	37.920	38.040
802.11ax HE80 SU SP	77.220	77.440
802.11ax HE160 SU SP	156.240	156.660

Table 97 - 99% Bandwidth Summary Results - MIMO CDD

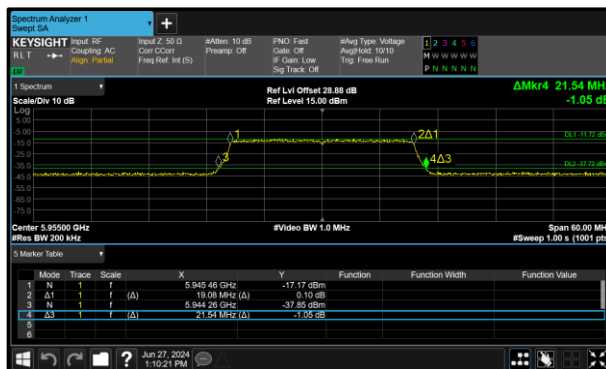


Figure 77 - 802.11ax HE20 SU LPI Minimum 99% OBW

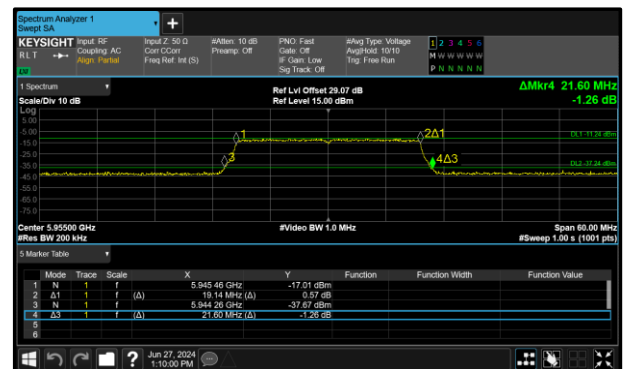


Figure 78 - 802.11ax HE20 SU LPI Maximum 99% OBW

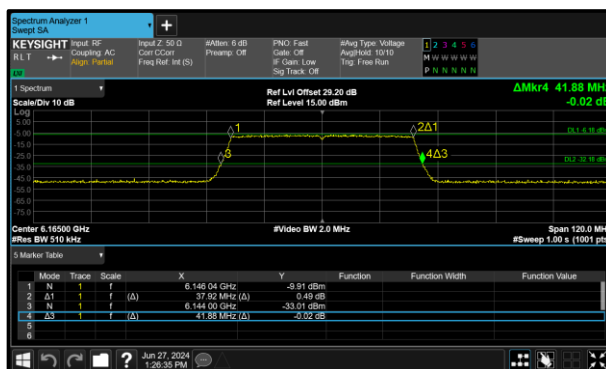


Figure 79 - 802.11ax HE40 SU LPI Minimum 99% OBW

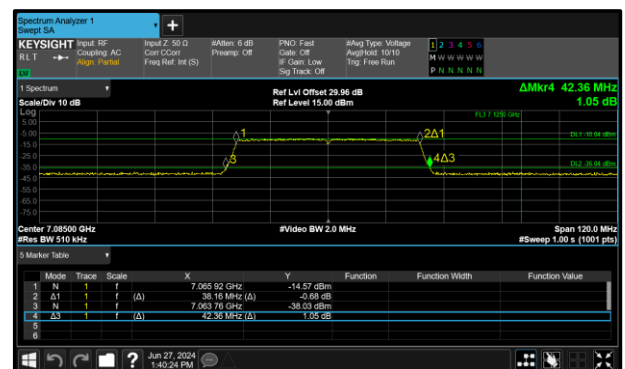


Figure 80 - 802.11ax HE40 SU LPI Maximum and 99% OBW

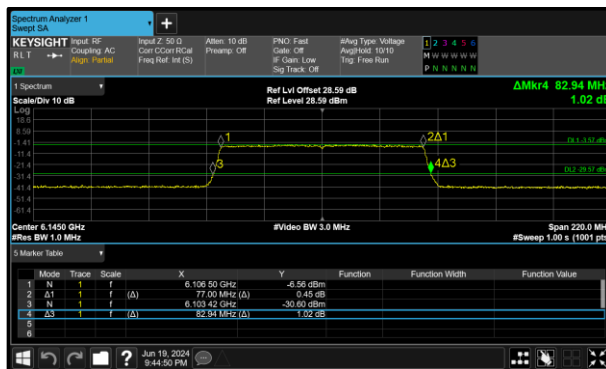


Figure 81 - 802.11ax HE80 SU LPI Minimum 99% OBW

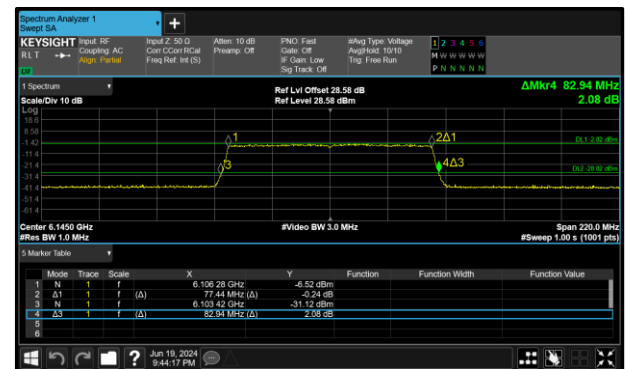


Figure 82 - 802.11ax HE80 SU LPI Maximum 99% OBW

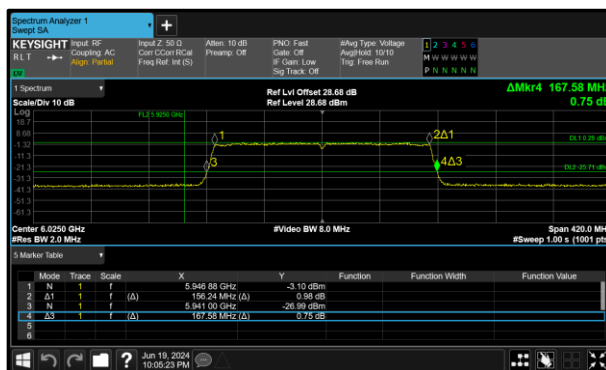


Figure 83 - 802.11ax HE160 SU LPI Minimum 99% OBW

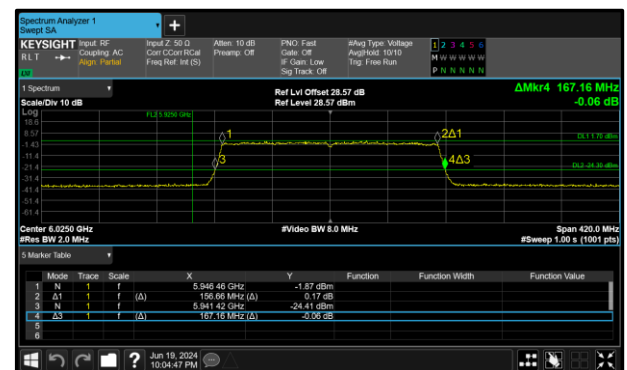


Figure 84 - 802.11ax HE160 SU LPI Maximum 99% OBW

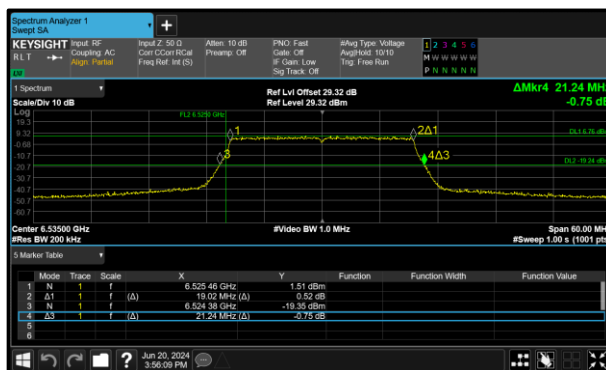


Figure 85 - 802.11ax HE20 SU SP Minimum 99% OBW

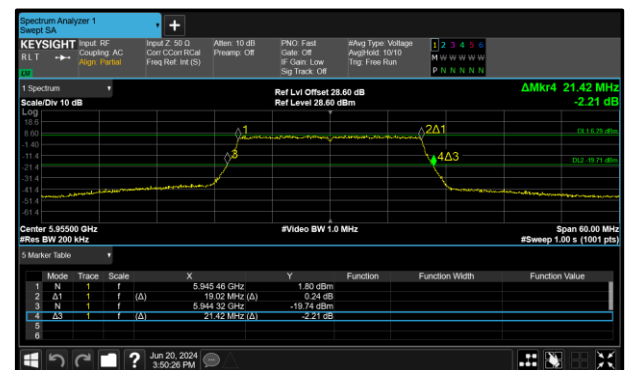


Figure 86 - 802.11ax HE20 SU SP Maximum 99% OBW

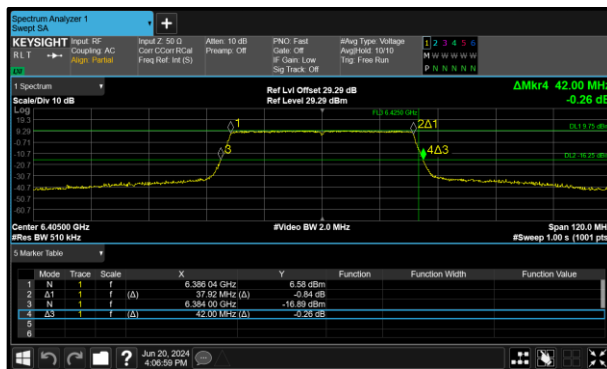


Figure 87 - 802.11ax HE40 SU SP Minimum 99% OBW

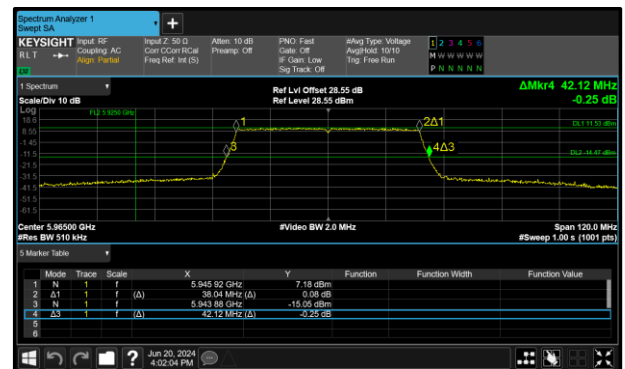


Figure 88 - 802.11ax HE40 SU SP Maximum 99% OBW

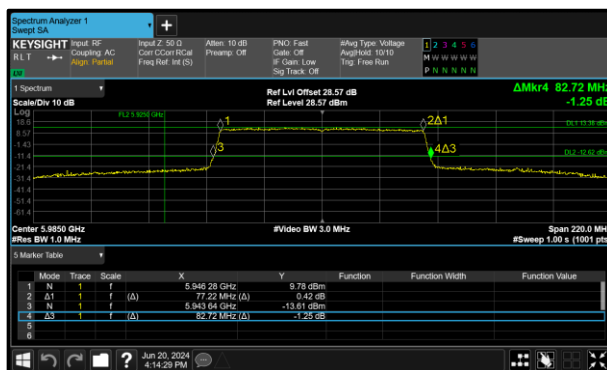


Figure 89 - 802.11ax HE80 SU SP Minimum 99% OBW

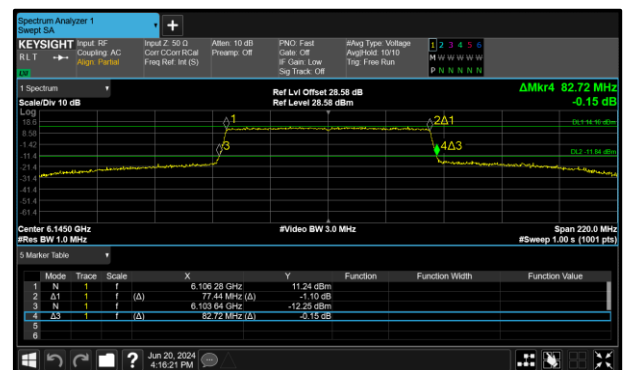


Figure 90 - 802.11ax HE80 SU SP Maximum 99% OBW

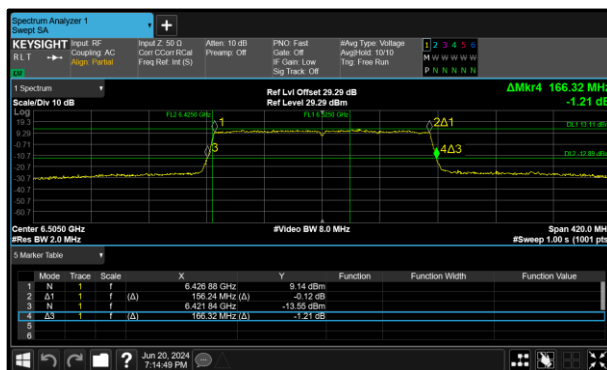


Figure 91 - 802.11ax HE160 SU SP Minimum 99% OBW

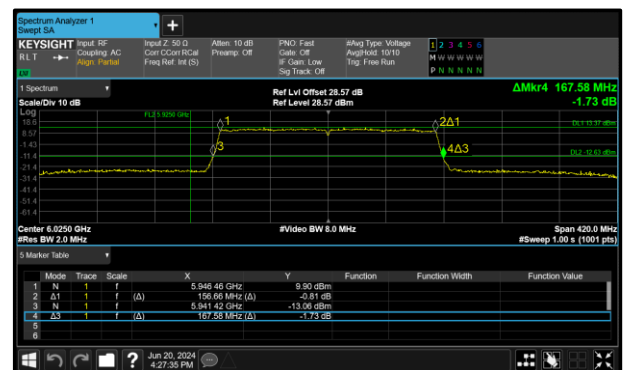


Figure 92 - 802.11ax HE160 SU SP Maximum 99% OBW



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
5955	21.600	21.540	-	-	320.00
6175	21.720	21.480	-	-	320.00
6415	21.480	21.480	-	-	320.00

Table 98 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
5955	19.140	19.080	-	-	320.00
6175	19.080	19.080	-	-	320.00
6415	19.080	19.140	-	-	320.00

Table 99 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
5965	41.880	42.000	-	-	320.00
6165	41.880	42.240	-	-	320.00
6405	42.000	42.120	-	-	320.00

Table 100 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
5965	38.040	38.040	-	-	320.00
6165	37.920	38.040	-	-	320.00
6405	37.920	38.040	-	-	320.00

Table 101 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
5985	82.940	83.160	-	-	320.00
6145	82.940	82.940	-	-	320.00
6385	82.720	82.720	-	-	320.00

Table 102 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
5985	77.220	77.220	-	-	320.00
6145	77.440	77.000	-	-	320.00
6385	77.440	77.220	-	-	320.00

Table 103 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6025	167.580	166.740	-	-	320.00
6185	167.160	166.740	-	-	320.00
6345	168.000	166.740	-	-	320.00

Table 104 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6025	156.660	156.240	-	-	320.00
6185	156.660	156.660	-	-	320.00
6345	156.660	156.660	-	-	320.00

Table 105 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6435	21.300	21.480	-	-	320.00
6475	21.240	21.300	-	-	320.00
6515	21.480	21.360	-	-	320.00

Table 106 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6435	19.080	19.080	-	-	320.00
6475	19.080	19.080	-	-	320.00
6515	19.080	19.080	-	-	320.00

Table 107 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6445	42.000	41.880	-	-	320.00
6485	42.000	42.360	-	-	320.00
6525	41.880	42.120	-	-	320.00

Table 108 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6445	38.040	38.040	-	-	320.00
6485	38.160	38.040	-	-	320.00
6525	38.040	38.040	-	-	320.00

Table 109 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6465	82.720	82.720	-	-	320.00

Table 110 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6465	77.440	77.440	-	-	320.00

Table 111 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6505	167.160	167.160	-	-	320.00

Table 112 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6505	156.660	156.660	-	-	320.00

Table 113 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6535	21.360	21.420	-	-	320.00
6695	21.360	21.360	-	-	320.00
6855	21.300	21.420	-	-	320.00
6875	21.360	21.240	-	-	320.00

Table 114 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6535	19.080	19.080	-	-	320.00
6695	19.080	19.080	-	-	320.00
6855	19.080	19.080	-	-	320.00
6875	19.080	19.080	-	-	320.00

Table 115 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6565	42.000	42.000	-	-	320.00
6685	42.000	41.880	-	-	320.00
6845	41.880	41.880	-	-	320.00

Table 116 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6565	37.920	38.040	-	-	320.00
6685	38.040	38.040	-	-	320.00
6845	38.160	38.040	-	-	320.00

Table 117 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6545	82.720	82.720	-	-	320.00
6625	82.940	82.720	-	-	320.00
6705	82.940	82.720	-	-	320.00
6785	82.720	82.720	-	-	320.00
6865	82.720	82.940	-	-	320.00

Table 118 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6545	77.440	77.220	-	-	320.00
6625	77.220	77.440	-	-	320.00
6705	77.220	77.220	-	-	320.00
6785	77.220	77.440	-	-	320.00
6865	77.220	77.220	-	-	320.00

Table 119 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6665	167.580	166.320	-	-	320.00
6825	167.580	166.740	-	-	320.00

Table 120 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6665	156.660	156.240	-	-	320.00
6825	156.660	156.660	-	-	320.00

Table 121 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6895	21.300	21.360	-	-	320.00
6995	21.420	21.480	-	-	320.00
7095	21.420	21.540	-	-	320.00

Table 122 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6895	19.080	19.080	-	-	320.00
6995	19.080	19.080	-	-	320.00
7095	19.080	19.080	-	-	320.00

Table 123 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6885	42.360	42.120	-	-	320.00
6925	42.000	42.120	-	-	320.00
7005	42.000	42.360	-	-	320.00
7085	42.240	42.360	-	-	320.00

Table 124 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6885	38.160	38.040	-	-	320.00
6925	37.920	38.040	-	-	320.00
7005	37.920	38.160	-	-	320.00
7085	38.160	38.160	-	-	320.00

Table 125 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6945	82.500	82.940	-	-	320.00
7025	82.940	83.160	-	-	320.00

Table 126 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6945	77.220	77.220	-	-	320.00
7025	77.220	77.220	-	-	320.00

Table 127 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6985	167.160	166.740	-	-	320.00

Table 128 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6985	156.660	156.240	-	-	320.00

Table 129 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
5955	21.360	21.420	-	-	320.00
6175	21.300	21.300	-	-	320.00
6415	21.240	21.360	-	-	320.00

Table 130 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
5955	19.020	19.020	-	-	320.00
6175	19.020	19.020	-	-	320.00
6415	19.020	19.020	-	-	320.00

Table 131 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
5965	42.120	42.000	-	-	320.00
6165	42.000	41.880	-	-	320.00
6405	41.880	42.000	-	-	320.00

Table 132 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
5965	38.040	38.040	-	-	320.00
6165	38.040	38.040	-	-	320.00
6405	38.040	37.920	-	-	320.00

Table 133 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
5985	82.720	82.500	-	-	320.00
6145	82.720	82.940	-	-	320.00
6385	82.500	83.600	-	-	320.00

Table 134 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
5985	77.220	77.220	-	-	320.00
6145	77.440	77.440	-	-	320.00
6385	77.440	77.440	-	-	320.00

Table 135 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6025	166.740	166.320	-	-	320.00
6185	167.580	167.160	-	-	320.00
6345	168.000	167.160	-	-	320.00

Table 136 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6025	156.660	156.660	-	-	320.00
6185	156.660	156.660	-	-	320.00
6345	156.660	156.660	-	-	320.00

Table 137 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6435	19.020	19.020	-	-	320.00
6475	19.020	19.020	-	-	320.00
6515	19.020	19.020	-	-	320.00

Table 138 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6445	38.040	38.040	-	-	320.00
6485	38.040	38.040	-	-	320.00
6525	38.040	38.040	-	-	320.00

Table 139 - 99% Bandwidth Results

Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6465	77.440	77.440	-	-	320.00
6545	77.440	77.440	-	-	320.00

Table 140 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6505	156.660	156.240	-	-	320.00

Table 141 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6535	21.240	21.300	-	-	320.00
6695	21.300	21.240	-	-	320.00
6855	21.360	21.300	-	-	320.00

Table 142 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6535	19.020	19.020	-	-	320.00
6695	19.020	19.020	-	-	320.00
6855	19.020	19.020	-	-	320.00

Table 143 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6565	42.000	42.000	-	-	320.00
6685	42.000	42.120	-	-	320.00
6845	41.760	41.880	-	-	320.00

Table 144 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6565	38.040	38.040	-	-	320.00
6685	38.040	38.040	-	-	320.00
6845	37.920	38.040	-	-	320.00

Table 145 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6625	83.160	83.160	-	-	320.00
6705	83.160	83.380	-	-	320.00
6785	82.940	83.380	-	-	320.00

Table 146 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6625	77.440	77.440	-	-	320.00
6705	77.220	77.440	-	-	320.00
6785	77.220	77.440	-	-	320.00

Table 147 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6665	167.580	166.320	-	-	320.00

Table 148 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6665	156.660	156.240	-	-	320.00

Table 149 - 99% Bandwidth Results



Protocol	26 dB Bandwidth (MHz)	
	Minimum	Maximum
802.11ax HE40 SU VLP	41.880	42.360
802.11ax HE80 SU VLP	82.500	83.380
802.11ax HE160 SU VLP	166.320	167.580

Table 150 - 26 dB Bandwidth Summary Results - MIMO CDD

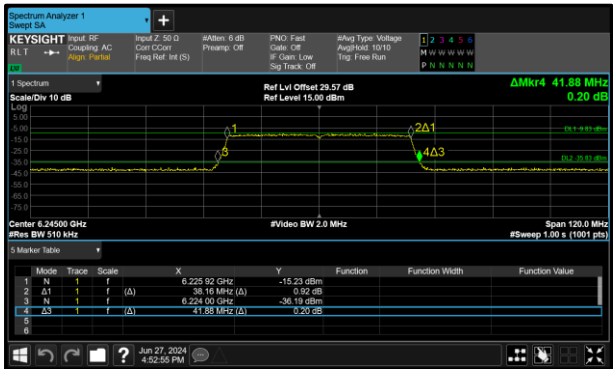


Figure 93 - 802.11ax HE40 SU VLP Minimum 26 dB EBW

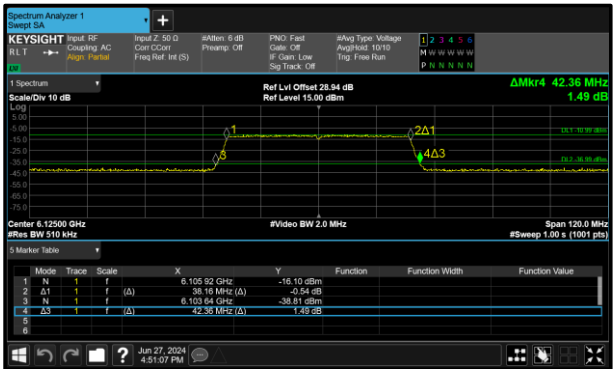


Figure 94 - 802.11ax HE40 SU VLP Maximum 26 dB EBW

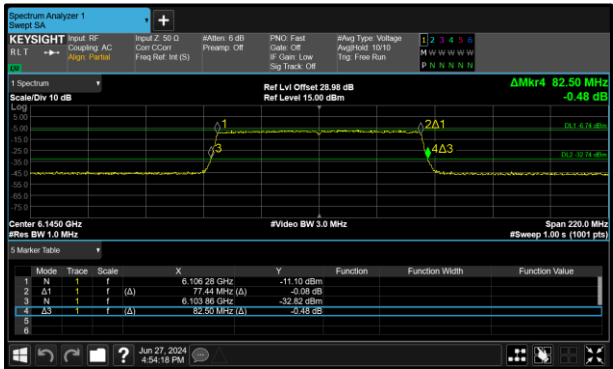


Figure 95 - 802.11ax HE80 SU VLP Minimum 26 dB EBW

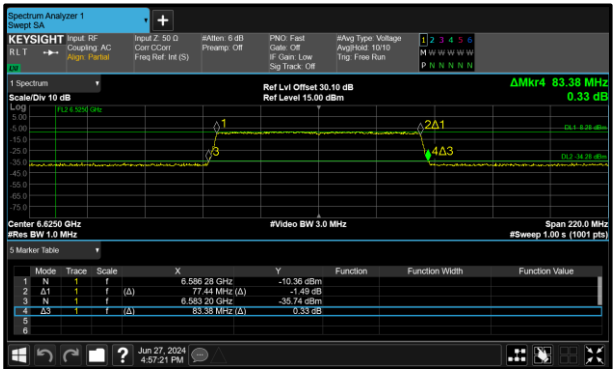


Figure 96 - 802.11ax HE80 SU VLP Maximum 26 dB EBW

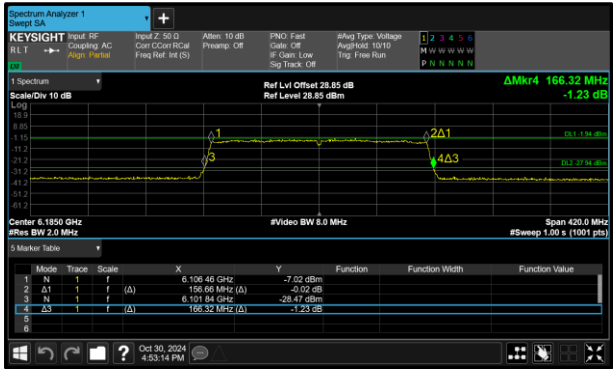


Figure 97 - 802.11ax HE160 SU VLP Minimum 26 dB EBW

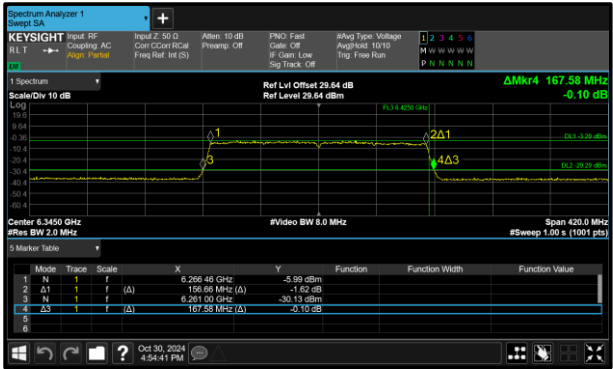


Figure 98 - 802.11ax HE160 SU VLP Maximum 26 dB EBW



Protocol	99% Bandwidth (MHz)	
	Minimum	Maximum
802.11ax HE40 SU VLP	38.160	38.160
802.11ax HE80 SU VLP	77.220	77.440
802.11ax HE160 SU VLP	156.660	157.080

Table 151 - 99% Bandwidth Summary Results - MIMO CDD

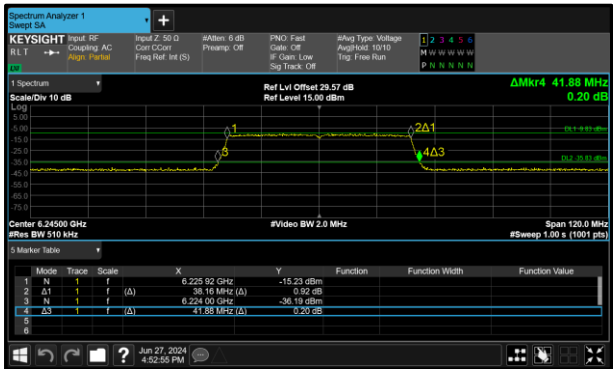


Figure 99 - 802.11ax HE40 SU VLP Minimum 99% OBW

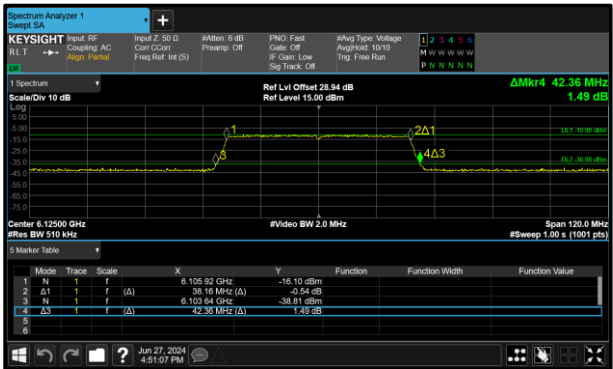


Figure 100 - 802.11ax HE40 SU VLP Maximum 99% OBW

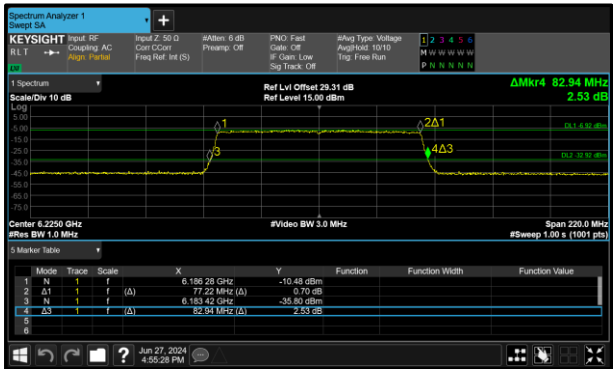


Figure 101 - 802.11ax HE80 SU VLP Minimum 99% OBW

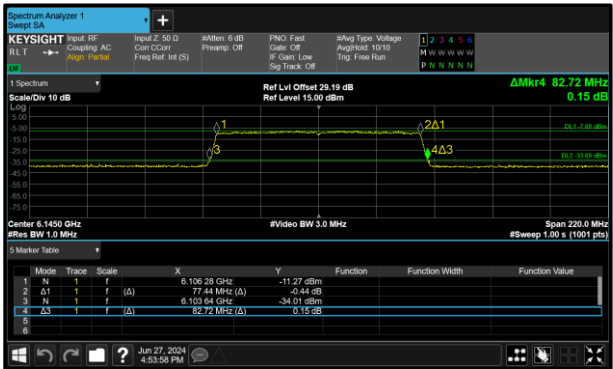


Figure 102 - 802.11ax HE80 SU VLP Maximum 99% OBW

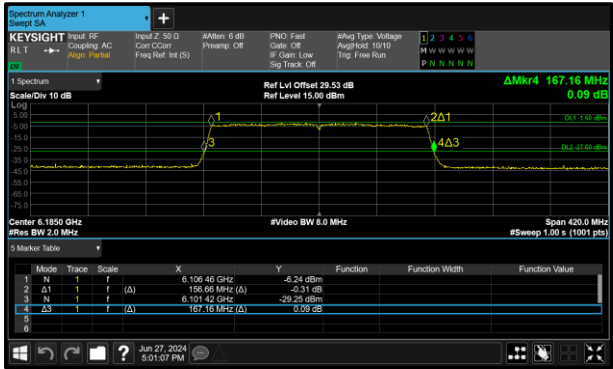


Figure 103 - 802.11ax HE160 SU VLP Minimum 99% OBW

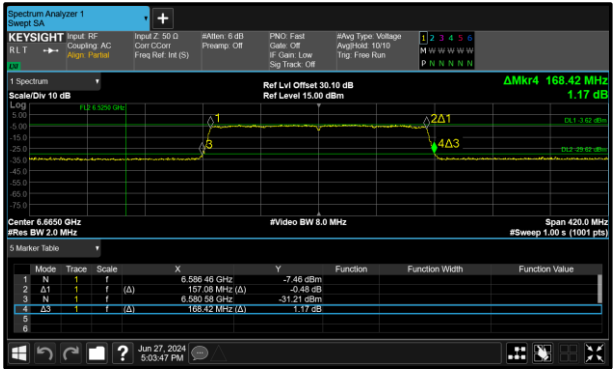


Figure 104 - 802.11ax HE160 SU VLP Maximum 99% OBW



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6125	42.120	42.360	-	-	320.00
6165	42.240	42.360	-	-	320.00
6245	41.880	42.120	-	-	320.00

Table 152 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6125	38.160	38.160	-	-	320.00
6165	38.160	38.160	-	-	320.00
6245	38.160	38.160	-	-	320.00

Table 153 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6145	82.720	82.500	-	-	320.00
6225	83.160	82.940	-	-	320.00
6385	83.160	83.160	-	-	320.00

Table 154 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6145	77.440	77.440	-	-	320.00
6225	77.440	77.220	-	-	320.00
6385	77.440	77.440	-	-	320.00

Table 155 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6185	167.580	166.320	-	-	320.00
6345	167.580	166.740	-	-	320.00

Table 156 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6185	156.660	156.660	-	-	320.00
6345	156.660	156.660	-	-	320.00

Table 157 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6625	83.380	83.380	-	-	320.00
6705	82.940	83.160	-	-	320.00
6785	82.940	83.160	-	-	320.00

Table 158 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6625	77.440	77.440	-	-	320.00
6705	77.440	77.440	-	-	320.00
6785	77.440	77.440	-	-	320.00

Table 159 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6665	167.160	167.160	-	-	320.00

Table 160 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6665	157.080	156.660	-	-	320.00

Table 161 - 99% Bandwidth Results

Protocol	26 dB Bandwidth (MHz)	
	Minimum	Maximum
802.11ax HE20 SU LPI	21.240	21.660
802.11ax HE40 SU LPI	41.640	42.240
802.11ax HE80 SU LPI	82.280	83.380
802.11ax HE160 SU LPI	166.320	167.160
802.11ax HE20 SU SP	21.180	21.480
802.11ax HE40 SU SP	41.880	42.480
802.11ax HE80 SU SP	82.500	86.900
802.11ax HE160 SU SP	165.900	167.160

Table 162 - 26 dB Bandwidth Summary Results - MIMO SDM

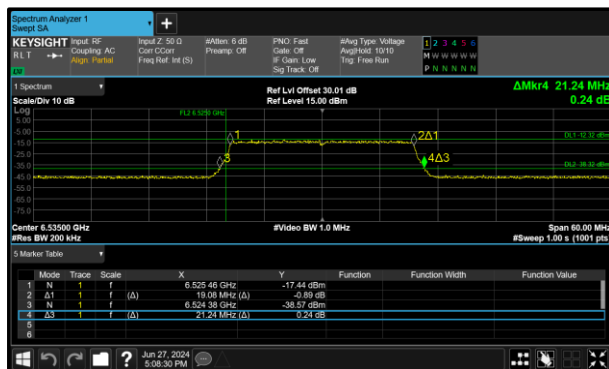


Figure 105 - 802.11ax HE20 SU LPI Minimum 26 dB EBW

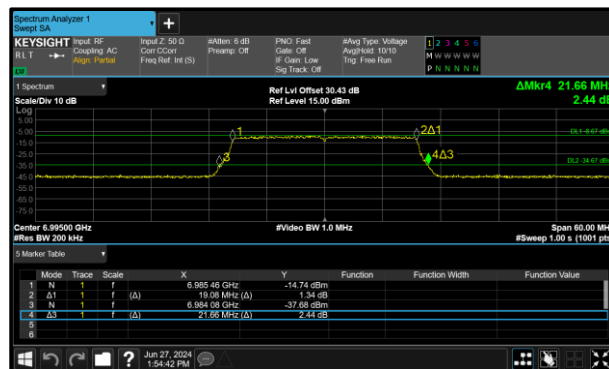


Figure 106 - 802.11ax HE20 SU LPI Maximum 26 dB EBW

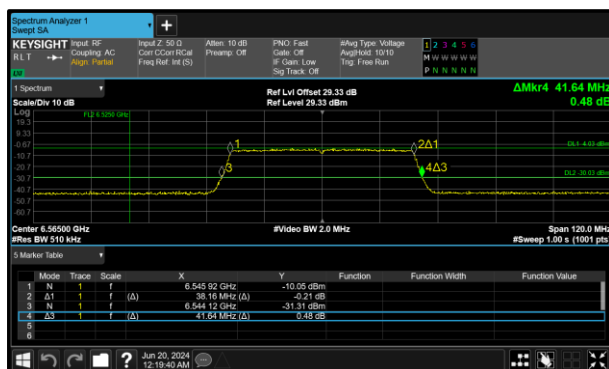


Figure 107 - 802.11ax HE40 SU LPI Minimum 26 dB EBW

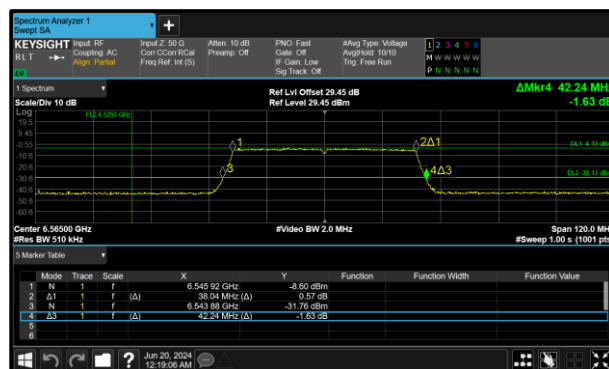


Figure 108 - 802.11ax HE40 SU LPI Maximum 26 dB EBW

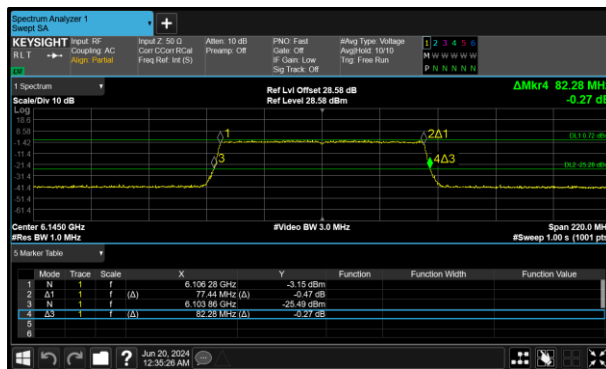


Figure 109 - 802.11ax HE80 SU LPI Minimum 26 dB EBW

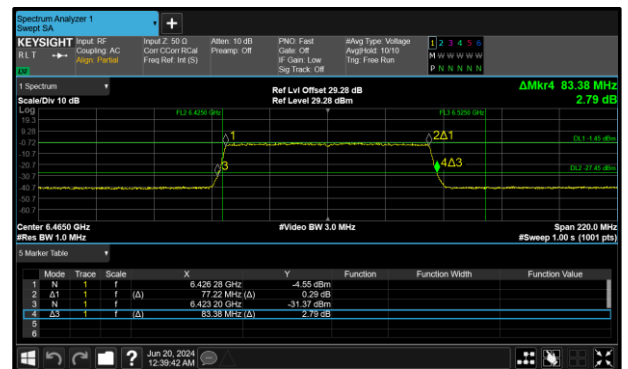


Figure 110 - 802.11ax HE80 SU LPI Maximum 26 dB EBW

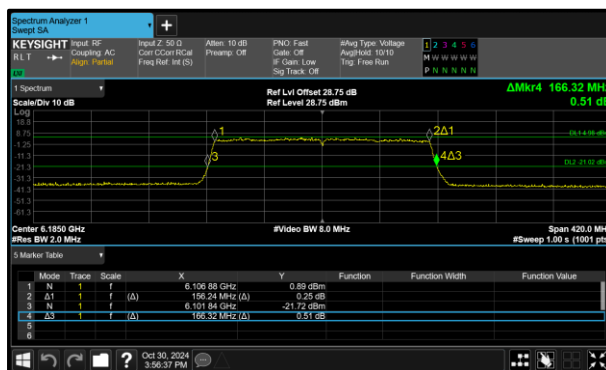


Figure 111 - 802.11ax HE160 SU LPI Minimum 26 dB EBW

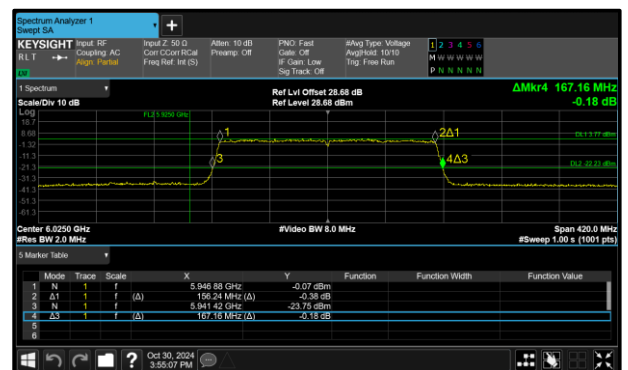


Figure 112 - 802.11ax HE160 SU LPI Maximum 26 dB EBW

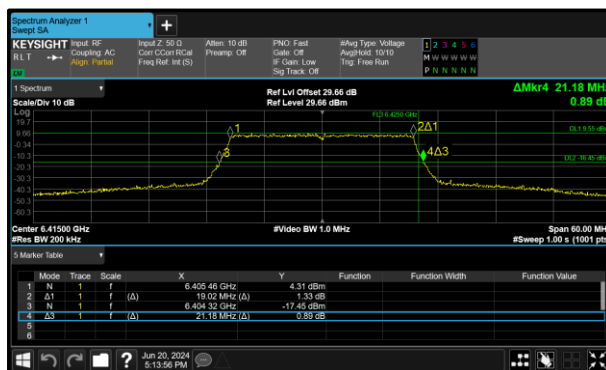


Figure 113 - 802.11ax HE20 SU SP Minimum 26 dB EBW

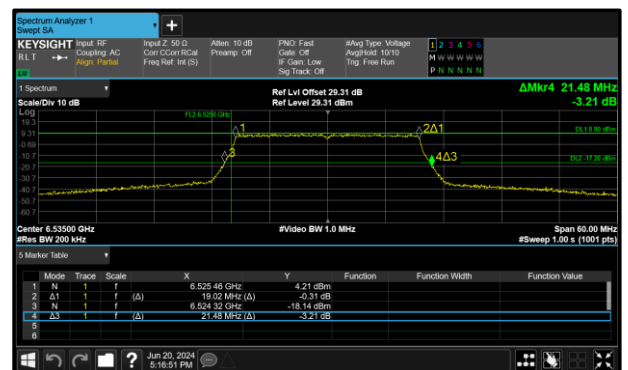


Figure 114 - 802.11ax HE20 SU SP Maximum 26 dB EBW

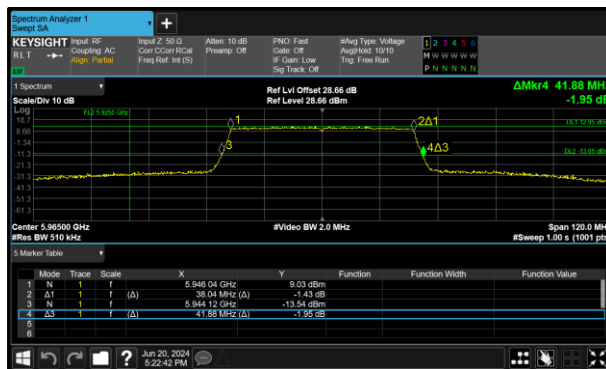


Figure 115 - 802.11ax HE40 SU SP Minimum 26 dB EBW

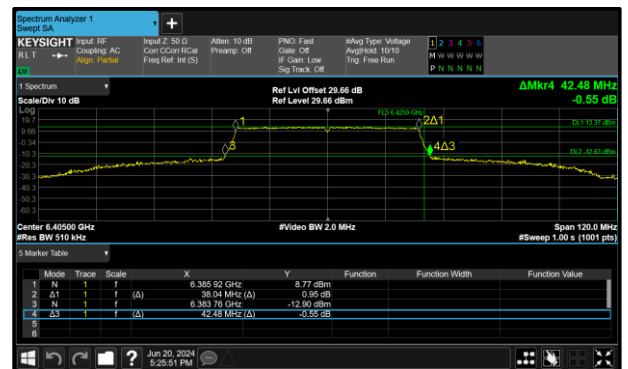


Figure 116 - 802.11ax HE40 SU SP Maximum 26 dB EBW

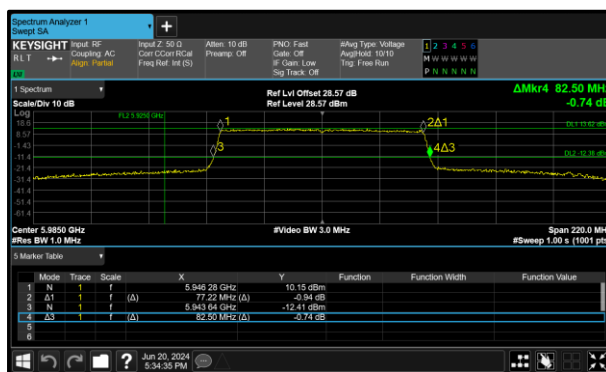


Figure 117 - 802.11ax HE80 SU SP Minimum 26 dB EBW

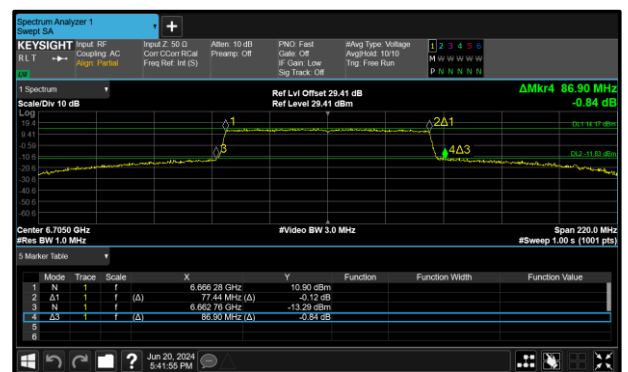


Figure 118 - 802.11ax HE80 SU SP Maximum 26 dB EBW

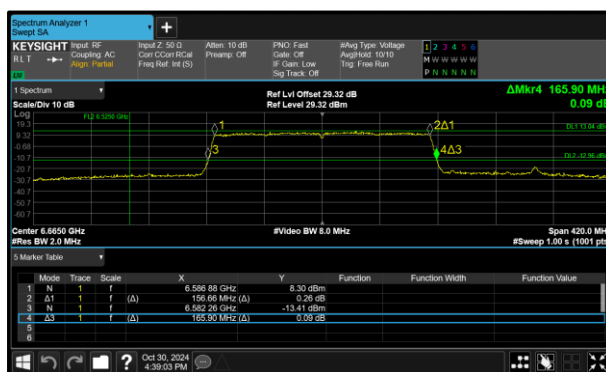


Figure 119 - 802.11ax HE160 SU SP Minimum 26 dB EBW

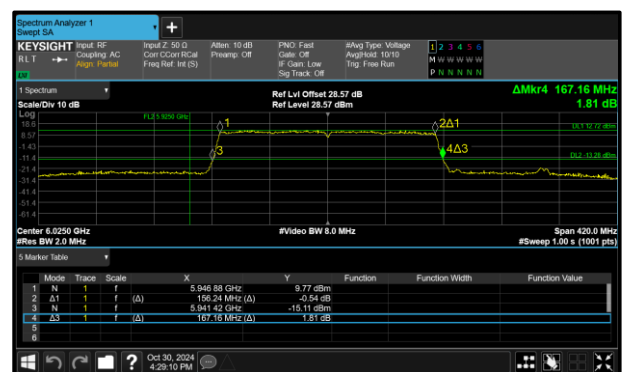


Figure 120 - 802.11ax HE160 SU SP Maximum 26 dB EBW



Protocol	99% Bandwidth (MHz)	
	Minimum	Maximum
802.11ax HE20 SU LPI	18.960	19.080
802.11ax HE40 SU LPI	37.920	38.160
802.11ax HE80 SU LPI	77.220	77.440
802.11ax HE160 SU LPI	156.240	156.660
802.11ax HE20 SU SP	19.020	19.080
802.11ax HE40 SU SP	37.920	38.160
802.11ax HE80 SU SP	77.220	77.660
802.11ax HE160 SU SP	156.240	156.660

Table 163 - 99% Bandwidth Summary Results - MIMO SDM

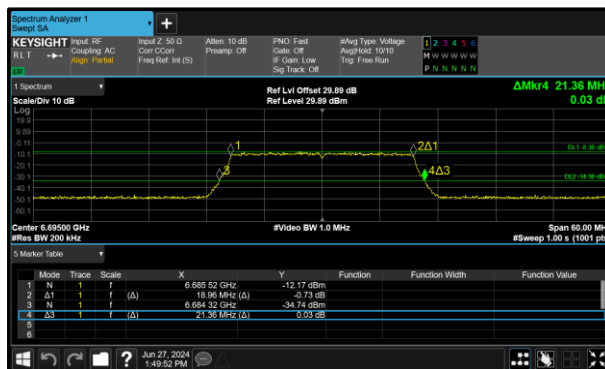


Figure 121 - 802.11ax HE20 SU LPI Minimum 99% OBW

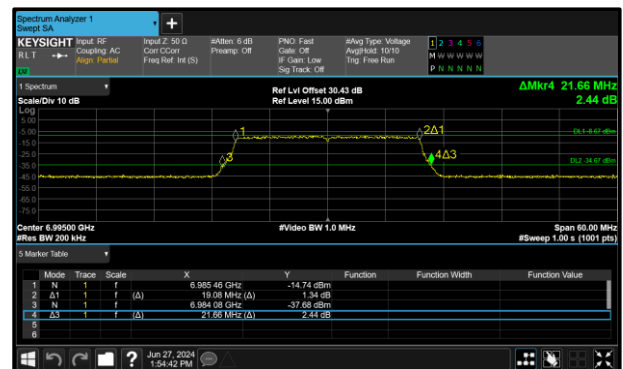


Figure 122 - 802.11ax HE20 SU LPI Maximum 99% OBW

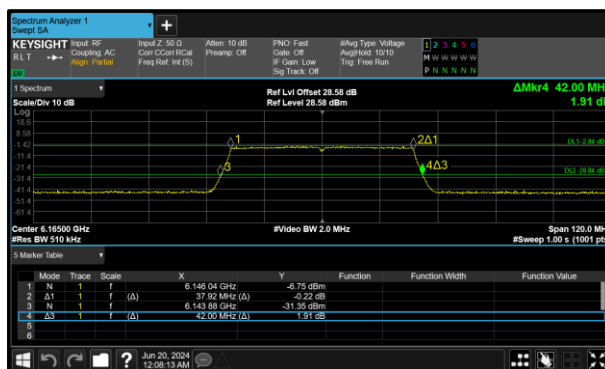


Figure 123 - 802.11ax HE40 SU LPI Minimum 99% OBW

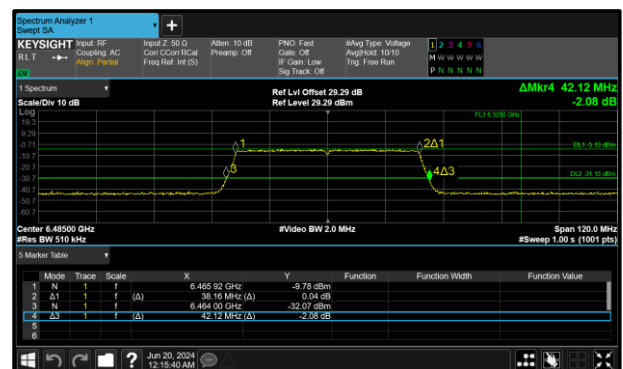


Figure 124 - 802.11ax HE40 SU LPI Maximum 99% OBW

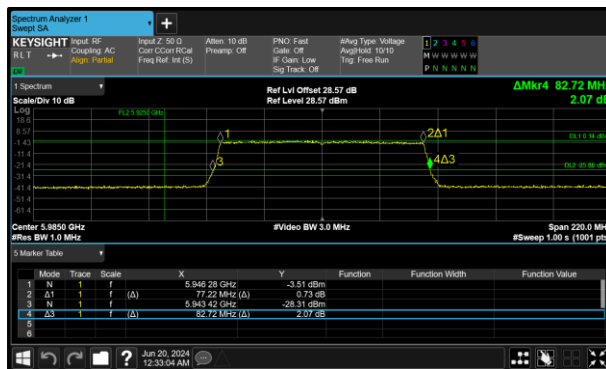


Figure 125 - 802.11ax HE80 SU LPI Minimum
99% OBW

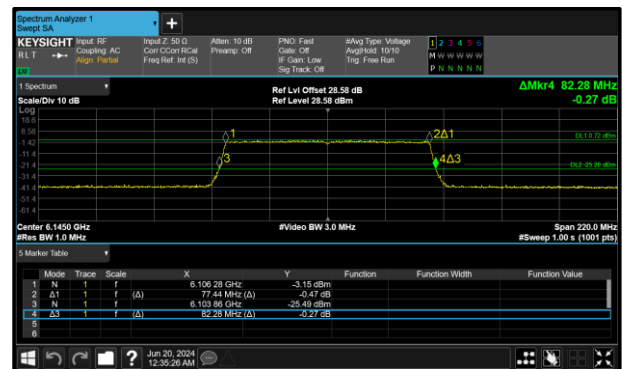


Figure 126 - 802.11ax HE80 SU LPI Maximum
99% OBW

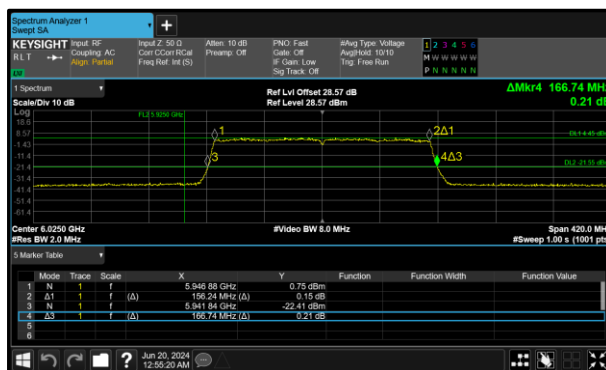


Figure 127 - 802.11ax HE160 SU LPI Minimum
99% OBW

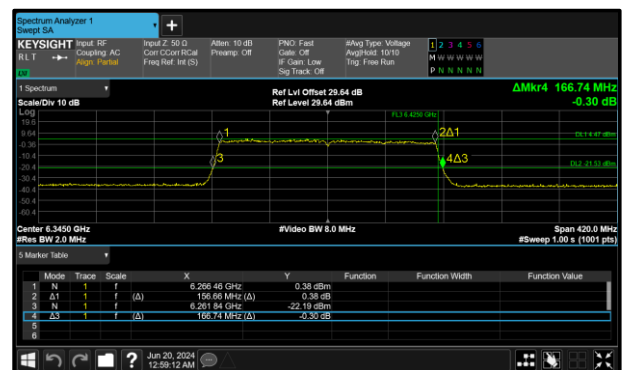


Figure 128 - 802.11ax HE160 SU LPI Maximum
99% OBW

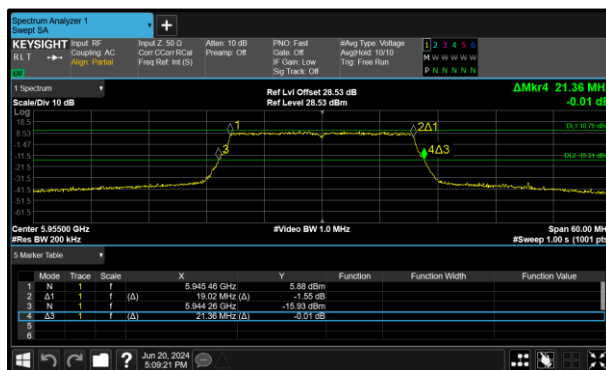


Figure 129 - 802.11ax HE20 SU SP Minimum 99%
OBW

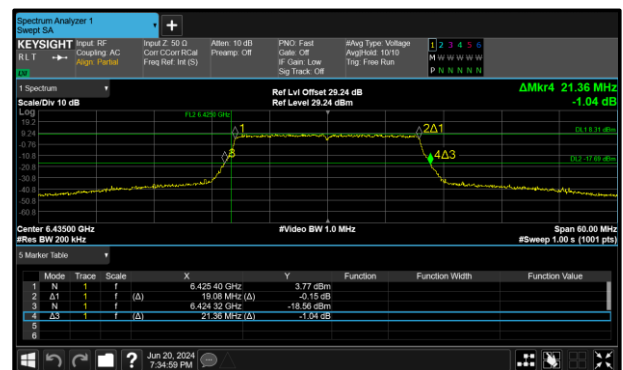


Figure 130 - 802.11ax HE20 SU SP Maximum
99% OBW

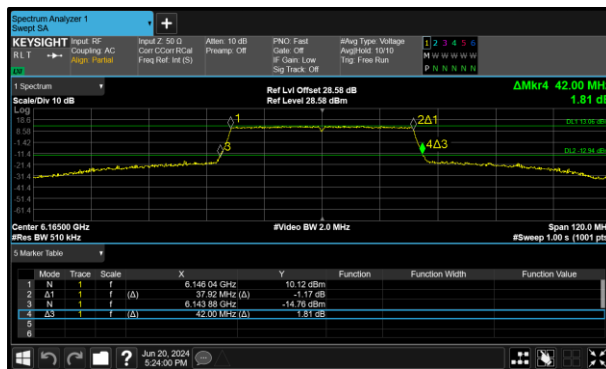


Figure 131 - 802.11ax HE40 SU SP Minimum 99% OBW

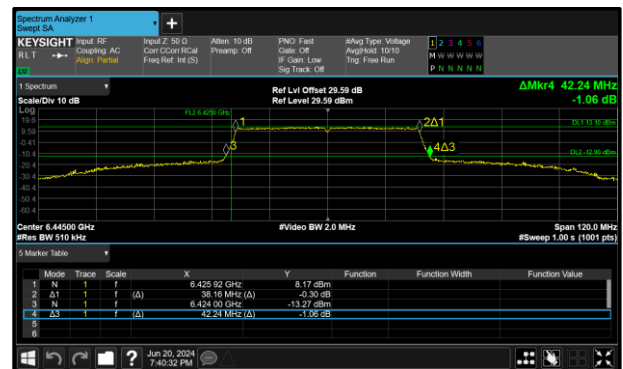


Figure 132 - 802.11ax HE40 SU SP Maximum 99% OBW

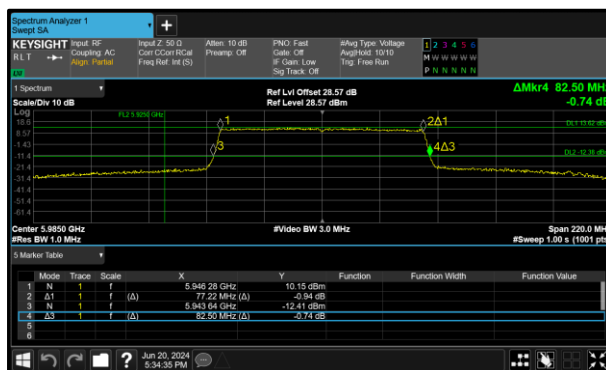


Figure 133 - 802.11ax HE80 SU SP Minimum 99% OBW

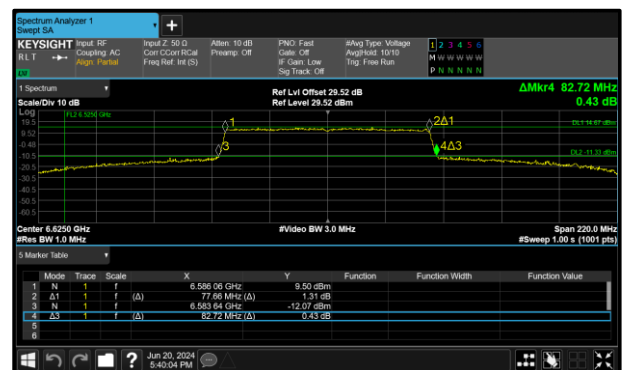


Figure 134 - 802.11ax HE80 SU SP Maximum 99% OBW

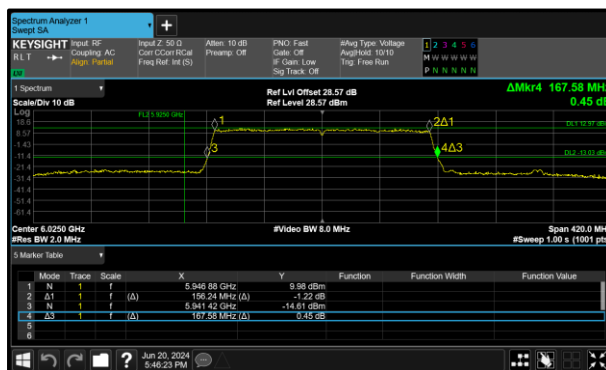


Figure 135 - 802.11ax HE160 SU SP Minimum 99% OBW

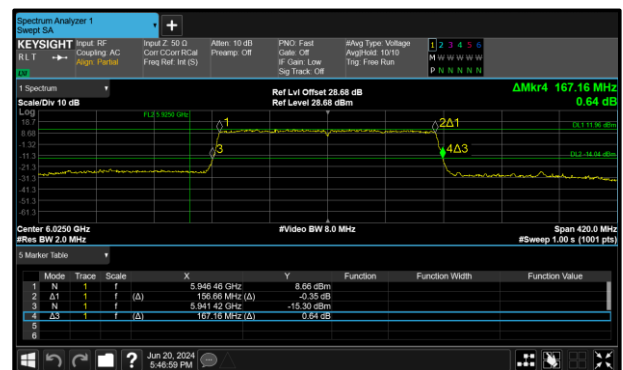


Figure 136 - 802.11ax HE160 SU SP Maximum 99% OBW



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
5955	21.600	21.360	-	-	320.00
6175	21.360	21.420	-	-	320.00
6415	21.420	21.480	-	-	320.00

Table 164 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
5955	19.020	19.080	-	-	320.00
6175	19.080	19.080	-	-	320.00
6415	19.020	19.020	-	-	320.00

Table 165 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
5965	42.000	41.760	-	-	320.00
6165	42.000	42.000	-	-	320.00
6405	42.000	42.000	-	-	320.00

Table 166 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
5965	38.040	38.040	-	-	320.00
6165	37.920	38.040	-	-	320.00
6405	37.920	37.920	-	-	320.00

Table 167 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
5985	82.720	82.720	-	-	320.00
6145	82.280	82.720	-	-	320.00
6385	82.500	82.720	-	-	320.00

Table 168 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
5985	77.220	77.220	-	-	320.00
6145	77.440	77.220	-	-	320.00
6385	77.220	77.220	-	-	320.00

Table 169 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6025	166.740	166.740	-	-	320.00
6185	167.160	166.320.00	-	-	320.00
6345	166.740	166.740	-	-	320.00

Table 170 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6025	156.240	156.240	-	-	320.00
6185	156.240	156.240	-	-	320.00
6345	156.660	156.660	-	-	320.00

Table 171 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6435	21.360	21.240	-	-	320.00
6475	21.480	21.360	-	-	320.00
6515	21.540	21.600	-	-	320.00

Table 172 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6435	19.080	19.020	-	-	320.00
6475	19.080	19.080	-	-	320.00
6515	19.080	19.080	-	-	320.00

Table 173 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6445	42.120	41.880	-	-	320.00
6485	42.000	42.120	-	-	320.00
6525	42.000	41.880	-	-	320.00

Table 174 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6445	38.040	38.040	-	-	320.00
6485	38.040	38.160	-	-	320.00
6525	37.920	38.040	-	-	320.00

Table 175 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6465	82.500	83.380	-	-	320.00

Table 176 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6465	77.440	77.220	-	-	320.00

Table 177 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6505	166.740	166.320.00	-	-	320.00

Table 178 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6505	156.240	156.660	-	-	320.00

Table 179 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6535	21.480	21.360	-	-	320.00
6695	21.360	21.360	-	-	320.00
6855	21.420	21.300	-	-	320.00
6875	21.240	21.420	-	-	320.00

Table 180 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6535	19.080	19.080	-	-	320.00
6695	18.960	19.080	-	-	320.00
6855	19.020	19.020	-	-	320.00
6875	19.080	19.080	-	-	320.00

Table 181 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6565	42.240	41.640	-	-	320.00
6685	42.000	42.120	-	-	320.00
6845	42.120	42.000	-	-	320.00

Table 182 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6565	38.040	38.160	-	-	320.00
6685	37.920	38.040	-	-	320.00
6845	38.040	38.040	-	-	320.00

Table 183 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6545	82.720	82.940	-	-	320.00
6625	82.280	82.720	-	-	320.00
6705	82.940	82.720	-	-	320.00
6785	82.500	82.940	-	-	320.00
6865	82.940	82.720	-	-	320.00

Table 184 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6545	77.220	77.220	-	-	320.00
6625	77.440	77.440	-	-	320.00
6705	77.220	77.220	-	-	320.00
6785	77.220	77.440	-	-	320.00
6865	77.220	77.220	-	-	320.00

Table 185 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6665	166.740	165.900	-	-	320.00
6825	167.160	166.740	-	-	320.00

Table 186 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6665	156.240	156.660	-	-	320.00
6825	156.660	156.660	-	-	320.00

Table 187 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6895	21.360	21.360	-	-	320.00
6995	21.660	21.480	-	-	320.00
7095	21.360	21.300	-	-	320.00

Table 188 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6895	19.080	19.020	-	-	320.00
6995	19.080	19.020	-	-	320.00
7095	19.080	19.080	-	-	320.00

Table 189 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6885	42.000	41.880	-	-	320.00
6925	42.000	42.120	-	-	320.00
7005	41.880	42.120	-	-	320.00
7085	42.120	41.760	-	-	320.00

Table 190 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6885	38.040	38.040	-	-	320.00
6925	38.040	38.040	-	-	320.00
7005	38.040	38.040	-	-	320.00
7085	37.920	38.160	-	-	320.00

Table 191 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6945	82.500	82.940	-	-	320.00
7025	82.500	82.500	-	-	320.00

Table 192 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6945	77.220	77.220	-	-	320.00
7025	77.440	77.220	-	-	320.00

Table 193 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8
Limit Clause(s):	15.407 (a)(11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				FCC Limit (MHz)
	A	B	C	D	
6985	166.740	166.320.00	-	-	320.00

Table 194 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				ISED Limit (MHz)
	A	B	C	D	
6985	156.660	156.240	-	-	320.00

Table 195 - 99% Bandwidth Results