

MEASUREMENT REPORT

FCC PART 15.407 / ISED RSS-248 UNII 802.11a/ax OFDM WIFI 6E

Applicant Name:

Apple Inc.
One Apple Park Way
Cupertino, CA 95014
United States

Date of Testing:

10/25/2024 - 1/10/2025

Test Report Issue Date:

2/12/2025

Test Site/Location:

Element Materials Technology, Morgan Hill, CA, USA

Test Report Serial No.:

1C2410210072-12-R3.BCG

FCC ID:	BCGA3266
IC:	579C-A3266
APPLICANT:	Apple Inc.

Application Type:

Certification

Model/HVIN:

A3266

EUT Type:

Tablet Device

Frequency Range:

5955 – 7115MHz

Modulation Type:

OFDM

FCC Classification:

15E 6GHz Low Power Dual Client (6CD)

FCC Rule Part(s):

Part 15 Subpart E (15.407)

ISED Specification:

RSS-248 Issue 3

Test Procedure(s):

ANSI C63.10-2020, KDB 789033 D02 v02r01

KDB 662911 D01 v02r01, KDB 987594 D02 v03

KDB 987594 D03 v03, KDB 987594 D04 v03

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2020 and KDB 789033 D02 v02r01. Test results reported herein relate only to the item(s) tested.

This revised Test Report (S/N: 1C2410210072-12-R3.BCG) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



RJ Ortanex
Executive Vice President



FCC ID: BCGA3266 IC: 579C-A3266	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 1 of 188


V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

T A B L E O F C O N T E N T S

1.0	INTRODUCTION.....	4
1.1	Scope.....	4
1.2	Element Materials Technology Test Location	4
1.3	Test Facility / Accreditations	4
2.0	PRODUCT INFORMATION	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Antenna Description.....	9
2.4	Test Support Equipment	9
2.5	Test Configuration.....	10
2.6	Software and Firmware.....	10
2.7	EMI Suppression Device(s)/Modifications	10
3.0	DESCRIPTION OF TESTS	11
3.1	Evaluation Procedure.....	11
3.2	AC Line Conducted Emissions	11
3.3	Radiated Emissions	12
3.4	Environmental Conditions	12
4.0	ANTENNA REQUIREMENTS	13
5.0	MEASUREMENT UNCERTAINTY.....	14
6.0	TEST EQUIPMENT CALIBRATION DATA.....	15
7.0	TEST RESULTS	16
7.1	Summary.....	16
7.2	26dB & 99% Bandwidth Measurement	18
7.3	Conducted Output Power and Max EIRP Measurement	37
7.4	Maximum Power Spectral Density	50
7.5	In-Band Emissions	82
7.6	Contention Based Protocol	114
7.7	Radiated Spurious Emissions – Above 1GHz.....	136
7.8	Radiated Spurious Emissions – Below 1GHz	180
7.9	AC Line-Conducted Emissions Measurement	184
8.0	CONCLUSION	188

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 2 of 188



MEASUREMENT REPORT



UNII Band	Channel Bandwidth (MHz)	Mode	Tx Frequency (MHz)	SISO				SDM	
				Antenna WF8		Antenna WF7a		Summed	
				Max. Power (mW)	Max e.i.r.p. (dBm)	Max. Power (mW)	Max e.i.r.p. (dBm)	Max. Power (mW)	Max e.i.r.p. (dBm)
5	20	802.11a/ax	5955 - 6415	11.117	10.46	7.603	8.81	10.471	10.20
6		802.11a/ax	6435 - 6515	3.715	5.70	7.674	8.85	7.586	8.80
7		802.11a/ax	6535 - 6875	5.741	7.59	7.482	8.74	7.709	8.87
8		802.11a/ax	6895 - 7115	7.278	8.62	7.745	8.89	7.430	8.71
5	40	802.11ax	5965 - 6405	20.893	13.20	15.849	12.00	20.417	13.10
6		802.11ax	6445 - 6525	10.023	10.01	15.346	11.86	15.031	11.77
7		802.11ax	6565 - 6845	11.402	10.57	14.962	11.75	15.205	11.82
8		802.11ax	6885 - 7085	14.928	11.74	15.417	11.88	15.205	11.82
5	80	802.11ax	5985 - 6385	37.497	15.74	27.416	14.38	35.645	15.52
6		802.11ax	6465	13.274	11.23	28.054	14.48	26.424	14.22
7		802.11ax	6545 - 6865	19.634	12.93	26.002	14.15	27.040	14.32
8		802.11ax	6945 - 7025	26.122	14.17	27.479	14.39	26.424	14.22
5	160	802.11ax	6025 - 6345	66.069	18.20	48.641	16.87	65.766	18.18
6		802.11ax	6505	23.014	13.62	46.989	16.72	47.098	16.73
7		802.11ax	6665 - 6825	35.237	15.47	47.098	16.73	48.529	16.86
8		802.11ax	6985	42.756	16.31	47.534	16.77	47.973	16.81

EUT Overview Low Power Indoor

UNII Band	Channel Bandwidth (MHz)	Mode	Tx Frequency (MHz)	SISO				SDM	
				Antenna WF8		Antenna WF7a		Summed	
				Max e.i.r.p. (mW)	Max e.i.r.p. (dBm)	Max e.i.r.p. (mW)	Max e.i.r.p. (dBm)	Max e.i.r.p. (mW)	Max e.i.r.p. (dBm)
5	20	802.11a/ax	5955 - 6415	314.051	24.97	223.357	23.49	506.991	27.05
7		802.11a/ax	6535 - 6855	157.761	21.98	209.894	23.22	368.978	25.67
5	40	802.11ax	5965 - 6405	315.500	24.99	216.770	23.36	605.341	27.82
7		802.11ax	6565 - 6845	158.489	22.00	199.986	23.01	418.794	26.22
5	80	802.11ax	5985 - 6385	302.691	24.81	209.411	23.21	610.942	27.86
7		802.11ax	6545 - 6865	158.489	22.00	212.814	23.28	420.727	26.24
5	160	802.11ax	6025 - 6345	309.742	24.91	213.304	23.29	595.662	27.75
7		802.11ax	6665 - 6825	157.036	21.96	192.309	22.84	411.150	26.14

EUT Overview Standard Power (FCC)

UNII Band	Channel Bandwidth (MHz)	Mode	Tx Frequency (MHz)	SISO				SDM	
				Antenna WF8		Antenna WF7a		Summed	
				Max e.i.r.p. (mW)	Max e.i.r.p. (dBm)	Max e.i.r.p. (mW)	Max e.i.r.p. (dBm)	Max e.i.r.p. (mW)	Max e.i.r.p. (dBm)
5	20	802.11a/ax	5955 - 6415	314.051	24.97	223.357	23.49	506.991	27.05
6		802.11a/ax	6435 - 6515	117.220	20.69	244.906	23.89	362.243	25.59
7		802.11a/ax	6535 - 6855	157.761	21.98	209.894	23.22	368.978	25.67
5	40	802.11ax	5965 - 6405	315.500	24.99	216.770	23.36	605.341	27.82
6		802.11ax	6445 - 6525	155.597	21.92	238.781	23.78	474.242	26.76
7		802.11ax	6565 - 6845	158.489	22.00	199.986	23.01	418.794	26.22
5	80	802.11ax	5985 - 6385	302.691	24.81	209.411	23.21	610.942	27.86
6		802.11ax	6465	111.944	20.49	239.332	23.79	480.839	26.82
7		802.11ax	6545 - 6865	158.489	22.00	212.814	23.28	420.727	26.24
5	160	802.11ax	6025 - 6345	309.742	24.91	213.304	23.29	595.662	27.75
6		802.11ax	6505	114.815	20.60	247.742	23.94	494.311	26.94
7		802.11ax	6665 - 6825	157.036	21.96	192.309	22.84	411.150	26.14

EUT Overview Standard Power (ISED)

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 3 of 188

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Materials Technology Test Location

These measurement tests were conducted at the Element Materials Technology facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element Materials Technology located in Morgan Hill, CA 95037, U.S.A.

- Element Materials Technology is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Materials Technology facility is a registered (22831) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 4 of 188

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID: BCGA3266** and **IC: 579C-A3266**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter while operating in the 6GHz band.

Test Device Serial No.: GK905D9C95, WR52XQW2NN, VVH0JH7X6Q, VQDMXWXDC4, DLXH9Z0000H0000RMA

2.2 Device Capabilities

This device contains the following capabilities:

802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, 802.11a/ax WIFI 6E, 802.15.4, Bluetooth (1x, EDR, LE1M, LE2M, HDR4, HDR8), NB UNII (1x, HDR4, HDR8), WPT

This device supports BT Beamforming

Standard Power (SP) mode is supported in U-NII Bands 5, and 7 for FCC and U-NII Bands 5, 6, and 7 for ISED. Lower Power Indoor (LPI) mode is supported in U-NII Bands 5, 6, 7, 8. Throughout report, data of Standard Power mode is denoted as SP while data of Lower Power Indoor mode is denoted as LPI.

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 5 of 188

Band 5		Band 6		Band 7		Band 8	
Ch.	Frequency (MHz)						
1	5955	97	6435	117	6535	189	6895
:	:	:	:	:	:	:	:
45	6175	105	6475	149	6695	209	6995
:	:	:	:	:	:	:	:
93	6415	113	6515	185	6875	233	7115

Table 2-1. 802.11a / 802.11ax (20MHz) Frequency / Channel Operations

Band 5		Band 6		Band 7		Band 8	
Ch.	Frequency (MHz)						
3	5965	99	6445	123	6565	187	6885
:	:	:	:	:	:	:	:
43	6165	107	6485	155	6725	211	7005
:	:	:	:	:	:	:	:
91	6405	115	6525	179	6845	227	7085

Table 2-2. 802.11ax (40MHz BW) Frequency / Channel Operations

Band 5		Band 6		Band 7		Band 8	
Ch.	Frequency (MHz)						
7	5985	103	6465	119	6545	199	6945
:	:			:	:	:	:
39	6145			151	6705	215	7025
:	:			:	:		
87	6385			183	6865		

Table 2-3. 802.11ax (80MHz BW) Frequency / Channel Operations

Band 5		Band 6		Band 7		Band 8	
Ch.	Frequency (MHz)						
15	6025	111	6505	143	6665	207	6985
:	:			:	:		
47	6185			175	6825		
:	:						
79	6345						

Table 2-4. 802.11ax (160MHz BW) Frequency / Channel Operations

Notes:

- 6GHz NII operation is possible in 20MHz, 40MHz, 80MHz, and 160MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B2(b) KDB 789033 D02 v02r01 and ANSI C63.10-2020. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 6 of 188 V 10.6 10/27/2023

Measured Duty Cycles							
802.11 Mode / Band		Antenna WF8		Antenna WF7a		SDM	
		Duty Cycle [%]	Radiated DCCF [dB]	Duty Cycle [%]	Radiated DCCF [dB]	Duty Cycle [%]	Radiated DCCF [dB]
6GHz	11a (20MHz) (Low Rate)	98.15	0.08	98.08	0.08	N/A	N/A
	11a (20MHz) (Mid Rate)	97.50	0.11	97.48	0.11	N/A	N/A
	11a (20MHz) (High Rate)	94.32	0.25	94.34	0.25	N/A	N/A
	11ax(SU) (20MHz) (Low Rate)	97.27	0.12	97.23	0.12	96.94	0.14
	11ax(SU) (20MHz) (Mid Rate)	95.13	0.22	95.15	0.22	95.52	0.20
	11ax(SU) (20MHz) (High Rate)	93.00	0.32	92.98	0.32	90.74	0.42
	11ax(SU) (40MHz) (Low Rate)	97.72	0.10	97.66	0.10	97.97	0.09
	11ax(SU) (40MHz) (Mid Rate)	95.50	0.20	95.48	0.20	96.56	0.15
	11ax(SU) (40MHz) (High Rate)	92.79	0.33	92.68	0.33	91.29	0.40
	11ax(SU) (80MHz) (Low Rate)	97.54	0.11	97.52	0.11	96.29	0.16
	11ax(SU) (80MHz) (Mid Rate)	96.29	0.16	96.29	0.16	94.99	0.22
	11ax(SU) (80MHz) (High Rate)	93.28	0.30	93.26	0.30	90.95	0.41
	11ax(SU) (160MHz) (Low Rate)	98.15	0.08	98.17	0.08	94.62	0.24
	11ax(SU) (160MHz) (Mid Rate)	94.19	0.26	93.54	0.29	95.13	0.22
	11ax(SU) (160MHz) (High Rate)	92.36	0.35	92.26	0.35	90.05	0.46

Table 2-5. Measured Duty Cycles
SDM = Antenna WF8 + Antenna WF7a

2. The device employs MIMO technology. Below are the possible configurations.

WiFi Configurations		SISO		CDD		SDM		STBC	
		Antenna WF8	Antenna WF7a						
5GHz	11a	✓	✓	✗	✗	✗	✗	✗	✗
	11ax(SU) (20MHz)	✓	✓	✓	✓	✓	✓	✓	✓
	11ax(SU) (40MHz)	✓	✓	✓	✓	✓	✓	✓	✓
	11ax(SU) (80MHz)	✓	✓	✓	✓	✓	✓	✓	✓
	11ax(SU) (160MHz)	✓	✓	✓	✓	✓	✓	✓	✓

Table 2-6. WIFI Configurations

✓ = Support ; ✗ = NOT Support

SISO = Single Input Single Output

SDM = Spatial Diversity Multiplexing – MIMO function

CDD = Cyclic Delay Diversity - 2Tx Function

STBC = Space-Time Block Coding – 2Tx Function

FCC ID: BCGA3266 IC: 579C-A3266		MEASUREMENT REPORT (CERTIFICATION)				Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device				

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

3. The device supports the following data rates (shown in Mbps):

802.11a	MCS Index	Spatial Stream	OFDM (802.11ax)											
			20MHz			40MHz			80MHz			160MHz		
			0.8μs GI	1.6μs GI	3.2μs GI	0.8μs GI	1.6μs GI	3.2μs GI	0.8μs GI	1.6μs GI	3.2μs GI	0.8μs GI	1.6μs GI	3.2μs GI
20MHz	HE	1	8.6	8.1	7.3	17.2	16.3	14.6	36	34	30.6	72.1	68.1	61.3
6	0	1	8.6	8.1	7.3	17.2	16.3	14.6	36	34	30.6	72.1	68.1	61.3
9	1	1	17.2	16.3	14.6	34.4	32.5	29.3	72.1	68.1	61.3	144.1	136.1	122.5
12	2	1	25.8	24.4	21.9	51.6	48.8	43.9	108.1	102.1	91.9	216.2	204.2	183.8
18	3	1	34.4	32.5	29.3	68.8	65	58.5	144.1	136.1	122.5	288.2	272.2	245
24	4	1	51.6	48.8	43.9	103.2	97.5	87.8	216.2	204.2	183.8	432.4	408.3	367.5
36	5	1	68.8	65	58.5	137.6	130	117	288.2	272.2	245	576.5	544.4	490
48	6	1	77.4	73.1	65.8	154.9	146.3	131.6	324.3	306.3	275.6	648.5	612.5	551.3
54	7	1	86	81.3	73.1	172.1	162.5	146.3	360.3	340.3	306.3	720.6	680.6	612.5
-	8	1	103.2	97.5	87.8	206.5	195	175.5	432.4	408.3	367.5	864.7	816.7	735
-	9	1	114.7	108.3	97.5	229.4	216.7	195	480.4	453.7	408.3	960.8	907.4	816.7
-	10	1	129	121.9	109.7	258.1	243.8	219.4	540.4	510.4	459.4	1080.9	1020.8	918.8
-	11	1	143.4	135.4	121.9	286.8	270.8	243.8	600.5	567.1	510.4	1201	1134.3	1020.8
6	0	2	17.2	16.3	14.6	34.4	32.5	29.3	72.1	68.1	61.3	144.1	136.1	122.5
9	1	2	34.4	32.5	29.3	68.8	65	58.5	144.1	136.1	122.5	288.2	272.2	245
12	2	2	51.6	48.8	43.9	103.2	97.5	87.8	216.2	204.2	183.8	432.4	408.3	367.5
18	3	2	68.8	65	58.5	137.6	130	117	288.2	272.2	245	576.5	544.4	490
24	4	2	103.2	97.5	87.8	206.5	195	175.5	432.4	408.3	367.5	864.7	816.7	735
36	5	2	137.6	130	117	275.3	260	234	576.5	544.4	490	1152.9	1088.9	980
48	6	2	154.9	146.3	131.6	309.7	292.5	263.3	648.5	612.5	551.3	1297.1	1225	1102.5
54	7	2	172.1	162.5	146.3	344.1	325	292.5	720.6	680.6	612.5	1441.2	1361.1	1225
-	8	2	206.5	195	175.5	412.9	390	351	864.7	816.7	735	1729.4	1633.3	1470
-	9	2	229.4	216.7	195	458.8	433.3	390	960.8	907.4	816.7	1921.6	1814.8	1633.3
-	10	2	258.1	243.8	219.4	516.2	487.5	438.8	1080.9	1020.8	918.8	2161.8	2041.7	1837.5
-	11	2	286.8	270.8	243.8	573.5	541.7	487.5	1201	1134.3	1020.8	2402	2268.5	2041.7

Table 2-7. Supported Data Rates

4. This device supports simultaneous transmission operations, which allows multiple transmitters to transmit simultaneously on the same antenna. The table below shows all configurations possible.

Antenna	Simultaneous Tx Config	Bluetooth 2.4GHz	Thread	WLAN	NB UNII	WIFI 5GHz	WIFI 6GHz
		BDR, EDR, HDR4/8, LE1/2M	802.15.4	802.11 b/g/n/ax	BDR, HDR4/8	802.11 a/n/ac/ax	802.11 a/ax
Ant WF8	Config 1	✓	✗	✗	✗	✓	✗
Ant WF8	Config 2	✓	✗	✗	✗	✗	✓
Ant WF8	Config 3	✗	✓	✗	✗	✓	✗
Ant WF8	Config 4	✗	✓	✗	✗	✗	✓
Ant WF8	Config 5	✗	✗	✓	✓	✗	✗

Table 2-8. Simultaneous Transmission Configurations

✓ = Support; ✗ = Not Support

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 8 of 188

Note:

All the above simultaneous transmission configurations have been tested and the worst-case configuration was found to be Config 1 and reported in RF Bluetooth and RF UNII OFDM test reports.

Specific 2.4 GHz Wi-Fi antenna that can only transmit simultaneously with 2.4 GHz Bluetooth antenna is listed in the SAR test report. For BT (2.4 GHz), in both connected and disconnected modes, and Wi-Fi (2.4 GHz) – Wi-Fi max power will not exceed minimum of (13.5dBm, SAR max cap, Reg max cap) power. Bluetooth can simultaneously transmit with IEEE 802.11a/n/ac/ax 5/6 GHz on separate antenna.

2.3 Antenna Description

Following antenna gains were provided by the manufacturer were used for the testing.

UNII Band	Tx Frequency (MHz)	Highest Antenna Gain (dBi)		Lowest Antenna Gain (dBi)	
		Antenna WF8	Antenna WF7a	Antenna WF8	Antenna WF7a
5	5955-6415	5.00	3.50	2.10	2.70
6	6435-6515	0.80	4.00	0.80	4.00
7	6535-6855	2.10	3.30	0.20	1.10
8	6895-7115	1.50	1.70	1.20	1.00

Table 2-9. Antenna Gains

2.4 Test Support Equipment

1	Apple MacBook Pro w/AC/DC Adapter	Model:	A2141	S/N:	C02H604EQ05D
2	Apple USB-C Cable	Model:	Spartan	S/N:	GXK1336018XKTR024
3	USB-C Cable w/ AC Adapter	Model:	A246C	S/N:	DWH80115BK826GV19
4	Apple Pencil	Model:	A2538	S/N:	KJ26TCFXJW
5	DC Power Supply	Model:	KPS3010D	S/N:	N/A
6	Table Device	Model:	A3268	S/N:	PR2XPWVM2K

Table 2-10. Test Support Equipment List

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 9 of 188

2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.10-2020, KDB 789033 D02 v02r01 and KDB 987594 D02 v03. ANSI C63.10-2020 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, 7.5 and 7.6 for antenna port conducted emissions test setups.

There are two vendors of the WiFi/Bluetooth radio modules, variant 1 and variant 2. Both radio modules have the same mechanical outline, same on-board antenna matching circuit, identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances. The worst case configuration was found between the two variants. The EUT was also investigated with and without charger.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power and the worst case channel.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

For AC line conducted and radiated test below 1GHz, following configuration were investigated and EUT powered by AC/DC was the worst case.

- EUT powered by AC/DC adaptor via USB-C cable with wire charger
- EUT powered by host PC via USB-C cable with wire charger

802.11ax HE20/40/80/160 2TX SDM mode test data provided in this report covers 802.11ax HE20/40/80/160 2TX STBC mode.

The data rates have been categorized into three groups: low, middle, and high data rates (see Table 2-7). All three groups have been investigated, and only the worst-case data rate has been reported.

For 802.11ax-RU test results, see separate UNII 6E OFDMA report, 1C2410210072-13.BCG.

2.6 Software and Firmware

The test was conducted with firmware version 22D20 installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 10 of 188

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2020) and the guidance provided in KDB 789033 D02 v02r01 were used in the measurement of the EUT.

Deviation from measurement procedure.....**None**

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-6. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50µH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is EPCOS 2X60A Power Line Filter (100dB Attenuation, 14kHz-18GHz) and the two EPCOs 2X48A filters (100dB Minimum Insertion Loss, 14kHz - 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.9. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 10.50.40.

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 11 of 188

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

Per KDB 414788, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was used while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: BCGA3266 IC: 579C-A3266	 element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device		Page 12 of 188

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 13 of 188

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	2.07
Line Conducted Disturbance	1.91
Radiated Disturbance (<30MHz)	4.12
Radiated Disturbance (30MHz - 1GHz)	4.85
Radiated Disturbance (1 - 18GHz)	5.08
Radiated Disturbance (>18GHz)	5.22

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 14 of 188

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance with the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Anritsu	ML2495A	Power Meter	7/8/2024	Annual	7/8/2025	1039008
Anritsu	MA2411B	Pulse Power Sensor	7/1/2024	Annual	7/1/2025	1911105
Anritsu	MA2411B	Pulse Power Sensor	10/21/2024	Annual	10/21/2025	1027293
ATM	180-442A-KF	20dB Nominal Gain Horn Antenna	3/14/2024	Annual	3/14/2025	T058701-01
ETS-Lindgren	3117	Double Ridged Guide Antenna (1-18 GHz)	4/9/2024	Annual	4/9/2025	00218555
Fairview Microwave	FMCA1975-36	30MHz-40GHz Conducted Cable *	6/10/2024	Annual	6/10/2025	-
Fairview Microwave	FM2CP1122-10	Directional Coupler *	6/10/2024	Annual	6/10/2025	1946
Fairview Microwave/MCL	FMCA1975-36/BW-K10-2W44+	30MHz-40GHz RF Cable/Attenuator *	6/10/2024	Annual	6/10/2025	-
Keysight Technology	N9040B	UXA Signal Analyzer	5/28/2024	Annual	5/28/2025	MY57212015
Keysight Technology	N9030A	PXA Signal Analyzer	7/11/2024	Annual	7/11/2025	MY49430244
Mini-Circuits	ZN2PD-9G	Power Splitter*	8/16/2024	Annual	8/16/2025	SF456200530
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz - 18GHz)	3/1/2024	Annual	3/1/2025	102145
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz - 18GHz)	8/14/2024	Annual	8/14/2025	101648
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	5/29/2024	Annual	5/29/2025	101619
Rohde & Schwarz	ESW44	EMI Test Receiver	5/1/2024	Annual	5/1/2025	101867
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	7/3/2024	Annual	7/3/2025	102356
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	6/10/2024	Annual	6/10/2025	100057
Rohde & Schwarz	HFH2-Z2	Loop Antenna	6/21/2024	Annual	6/21/2025	100519
Rohde & Schwarz	ENV216	Two-Line V-Network	4/24/2024	Annual	4/24/2025	101364
Rohde & Schwarz	SMW200A	Vector Signal Generator	4/4/2024	Annual	4/4/2025	109456
Schwarzbeck	VULB 9162	Bilog Antenna (30MHz - 6GHz)	4/29/2024	Annual	4/29/2025	00304

Table 6-1. Test Equipment List

Note:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. * denotes passive equipment that have been internally verified/calibrated.

FCC ID: BCGA3266 IC: 579C-A3266		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 15 of 188

7.0 TEST RESULTS

7.1 Summary

Company Name: Apple Inc.
 FCC ID: BCGA3266
 IC: 579C-A3266
 FCC Classification: 15E 6GHz Low Power Dual Client (6CD)

FCC Part Section(s) / KDB Reference	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049, 15.407(a)(11)	RSS Gen [6.7], RSS-248 [4.4]	Occupied Bandwidth/ 26dB Bandwidth	99% of the occupied bandwidth of any channel must be contained within each of its respective U-NII sub bands < 320MHz (5.925 - 7.125GHz)	CONDUCTED	PASS	Section 7.2
15.407(a)(8)	RSS-248 [4.5.3]	Maximum Power Spectral Density	< -1dBm/MHz e.i.r.p. for Low Power Indoor		PASS	Section 7.4
15.407(a)(7)	RSS-248 [4.5.5]		< 17dBm/MHz e.i.r.p. for Standard Power		PASS	
15.407(a)(8)	RSS-248 [4.5.3]	Maximum EIRP	< 24dBm over the frequency band of operation		PASS	Section 7.3
15.407(a)(7)	RSS-248 [4.5.5]		< 30dBm over the frequency band of operation		PASS	
15.407(b)(7)	RSS-248 [4.6.2]	In-Band Emissions	EUT must meet the limits detailed in 15.407(b)(7) and RSS-248 [4.6.2] b)		PASS	Section 7.5
15.407(d)(6)	RSS-248 [4.7]	Contention Based Protocol	EUT must detect AWGN signal with 90% (or better) certainty		PASS	Section 7.6
15.407(a)(7)	RSS-248 [4.5.5]	Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point	EUT maintains its power level at least 6 dB lower than that of the standard-power access point		PASS	See UNII 6E OFDMA Report 1C24102100 72-13.BCG
987594 D02 v03	987594 D02 v03	Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP	EUT maximum power level shall not exceed 30dBm EIRP when connected to Standard Power AP, and 24dBm EIRP when connected to Low Power Indoor AP		PASS	
15.407(b)(6)	RSS-248 [4.7.2]	Undesirable Emissions	< -27dBm/MHz e.i.r.p. outside of the 5.925 – 7.125GHz band	RADIATED	PASS	Section 7.7
15.205, 15.209	RSS-248 [4.6.2] RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emisions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9])		PASS	Section 7.7, 7.8
15.407(b)(9)	RSS-Gen [8.8]	AC Conducted Emissions (150kHz – 30MHz)	< FCC 15.207 (RSS-Gen [8.8]) limits	LINE CONDUCTED	PASS	Section 7.9

Table 7-1. Summary of Test Results

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 16 of 188

Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "Conducted Automation," Version 1.1.1.
- 5) For radiated testing, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "Chamber Automation," Version 3.1.0.
- 6) All radiated measurements were tested at the highest supported power setting per band.

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 17 of 188

7.2 26dB & 99% Bandwidth Measurement

§2.1049; §15.407; RSS-Gen [6.7]

Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2020 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

Test Procedure Used

ANSI C63.10-2020 – Section 12.5.2
KDB 789033 D02 v02r01 – Section C

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = in the range of 1% to 5% of the emission bandwidth
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

1. All data rates and antenna configurations were investigated, and tabular data has been reported. Only worst case plots per bandwidth have been reported.

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 18 of 188

7.2.1 Antenna WF8 26dB & 99% Bandwidth Measurements – SP

	Frequency [MHz]	Channel	802.11 MODE	Data Rate [Mbps]	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]	Maximum Bandwidth Limit [MHz]	Pass / Fail
Band 5	5955	1	a	12.00	16.76	21.09	320	Pass
	6175	45	a	12.00	16.78	21.10	320	Pass
	6415	93	a	12.00	16.77	21.03	320	Pass
	5955	1	ax (20MHz)	24/25.8 (MCS2)	19.06	21.37	320	Pass
	6175	45	ax (20MHz)	49/51.6 (MCS4)	19.02	21.27	320	Pass
	6415	93	ax (20MHz)	49/51.6 (MCS4)	19.07	21.35	320	Pass
	5965	3	ax (40MHz)	271/286.8 (MCS11)	37.88	41.51	320	Pass
	6165	43	ax (40MHz)	49/51.6 (MCS2)	37.97	41.67	320	Pass
	6405	91	ax (40MHz)	49/51.6 (MCS2)	37.98	41.93	320	Pass
	5985	7	ax (80MHz)	204/216.2 (MCS4)	77.30	82.24	320	Pass
	6145	39	ax (80MHz)	102/108.1 (MCS2)	77.27	82.32	320	Pass
	6385	87	ax (80MHz)	102/108.1 (MCS2)	77.17	82.36	320	Pass
	6025	15	ax (160MHz)	183.8/216.2 (MCS2)	156.38	166.48	320	Pass
	6185	47	ax (160MHz)	1020.8/1201 (MCS11)	156.90	167.23	320	Pass
	6345	79	ax (160MHz)	1020.8/1201 (MCS11)	156.52	166.61	320	Pass
Band 6	6435	97	a	12.00	16.68	20.79	320	Pass
	6475	105	a	24.00	16.70	20.90	320	Pass
	6515	113	a	12.00	16.73	20.83	320	Pass
	6345	97	ax (20MHz)	24/25.8 (MCS2)	19.02	21.32	320	Pass
	6475	105	ax (20MHz)	135/143.4 (MCS11)	19.02	21.22	320	Pass
	6515	113	ax (20MHz)	135/143.4 (MCS11)	19.04	21.23	320	Pass
	6445	99	ax (40MHz)	49/51.6 (MCS2)	37.92	41.43	320	Pass
	6485	107	ax (40MHz)	49/51.6 (MCS2)	37.96	41.60	320	Pass
	6525	115	ax (40MHz)	49/51.6 (MCS2)	37.91	41.41	320	Pass
	6465	103	ax (80MHz)	204/216.2 (MCS4)	77.12	81.66	320	Pass
	6505	111	ax (160MHz)	1020.8/1201 (MCS11)	157.06	240.90	320	Pass
Band 7	6535	117	a	12.00	16.75	21.09	320	Pass
	6695	149	a	12.00	16.76	21.16	320	Pass
	6855	181	a	12.00	16.79	21.17	320	Pass
	6535	117	ax (20MHz)	135/143.4 (MCS11)	19.15	21.34	320	Pass
	6695	149	ax (20MHz)	135/143.4 (MCS11)	19.07	21.31	320	Pass
	6855	181	ax (20MHz)	49/51.6 (MCS4)	19.02	21.32	320	Pass
	6565	123	ax (40MHz)	98/103.2 (MCS4)	37.97	41.59	320	Pass
	6725	155	ax (40MHz)	49/51.6 (MCS2)	38.05	41.55	320	Pass
	6845	179	ax (40MHz)	49/51.6 (MCS2)	38.03	41.74	320	Pass
	6625	135	ax (80MHz)	204/216.2 (MCS4)	77.42	82.45	320	Pass
	6705	151	ax (80MHz)	102/108.1 (MCS2)	77.15	82.22	320	Pass
	6785	167	ax (80MHz)	204/216.2 (MCS4)	77.13	82.28	320	Pass
	6665	143	ax (160MHz)	1020.8/1201 (MCS11)	156.78	166.53	320	Pass

Table 7-2. Conducted Bandwidth Measurements Antenna WF8

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 19 of 188



Plot 7-1. 26dB & 99% Bandwidth Plot Antenna WF8 (20MHz 802.11ax (UNII Band 5) – Ch. 1)



Plot 7-3. 26dB & 99% Bandwidth Plot Antenna WF8 (80MHz 802.11ax (UNII Band 5) – Ch. 87)






Plot 7-2. 26dB & 99% Bandwidth Plot Antenna WF8 (40MHz 802.11ax (UNII Band 5) – Ch. 91)



Plot 7-4. 26dB & 99% Bandwidth Plot Antenna WF8 (160MHz 802.11ax (UNII Band 5) – Ch. 47)


FCC ID: BCGA3266	MEASUREMENT REPORT (CERTIFICATION)		
IC: 579C-A3266			
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Approved by: Technical Manager

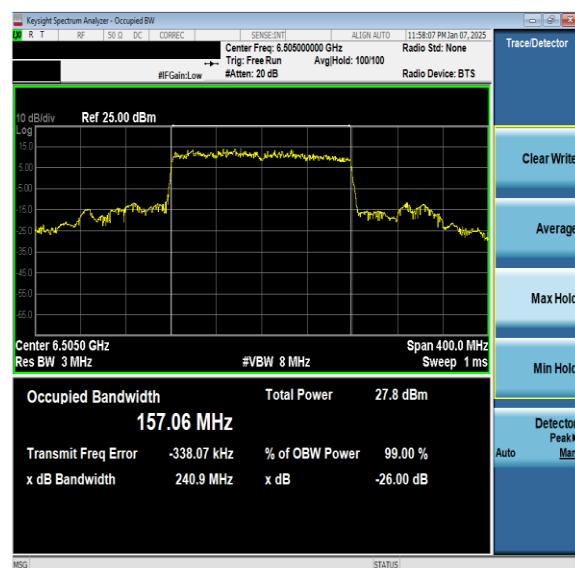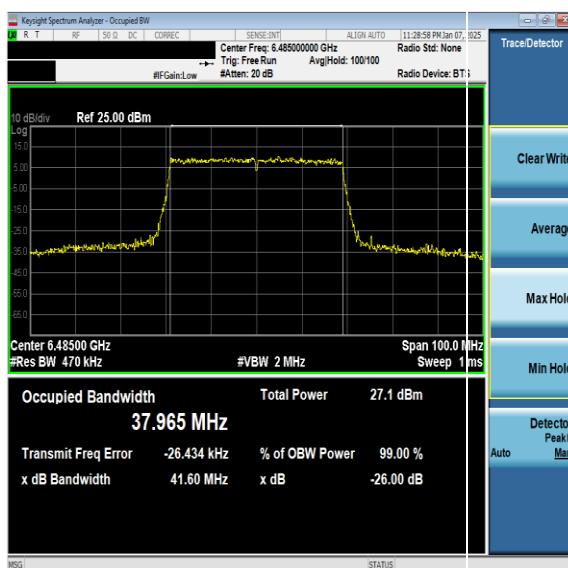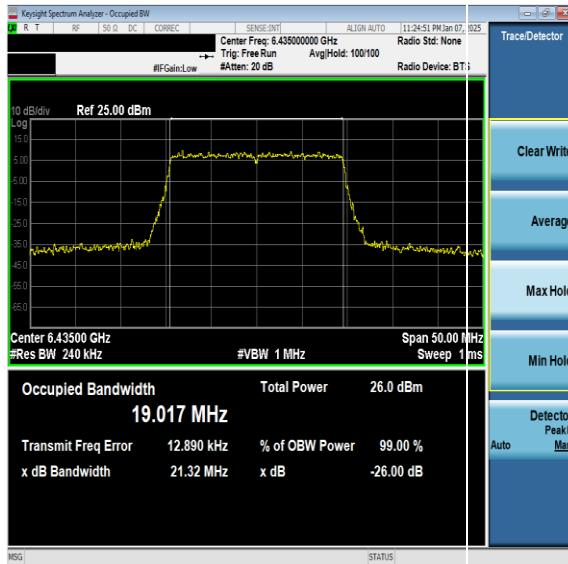

FCC ID: BCGA3266 IC: 579C-A3266		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 21 of 188



Plot 7-9. 26dB & 99% Bandwidth Plot Antenna WF8 (20MHz 802.11ax (UNII Band 7) – Ch. 117)

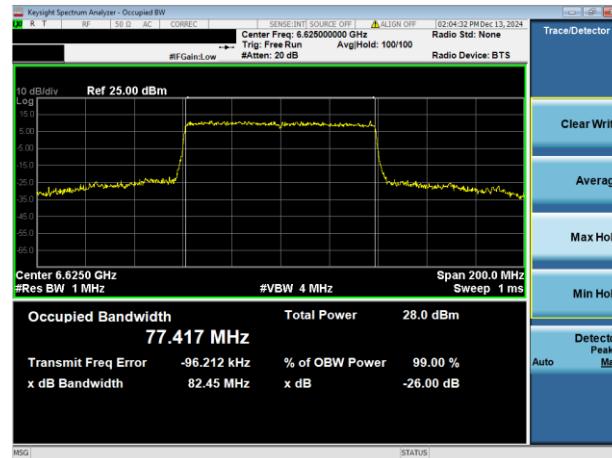

Plot 7-11. 26dB & 99% Bandwidth Plot Antenna WF8 (80MHz 802.11ax (UNII Band 7) – Ch. 135)



Plot 7-10. 26dB & 99% Bandwidth Plot Antenna WF8 (40MHz 802.11ax (UNII Band 7) – Ch. 179)



Plot 7-12. 26dB & 99% Bandwidth Plot Antenna WF8 (160MHz 802.11ax (UNII Band 7) – Ch. 143)


FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 22 of 188

7.2.2 Antenna WF8 26dB & 99% Bandwidth Measurements – LPI


Frequency [MHz]	Channel	802.11 MODE	Data Rate [Mbps]	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]	Maximum Bandwidth Limit [MHz]	Pass / Fail
5955	1	a	12.00	16.77	20.97	320	Pass
6175	45	a	12.00	16.79	21.10	320	Pass
6415	93	a	12.00	16.74	20.94	320	Pass
5955	1	ax (20MHz)	49/51.6 (MCS4)	19.01	21.35	320	Pass
6175	45	ax (20MHz)	135/143.4 (MCS11)	19.05	21.42	320	Pass
6415	93	ax (20MHz)	24/25.8 (MCS2)	19.04	21.36	320	Pass
5965	3	ax (40MHz)	49/51.6 (MCS2)	37.97	41.86	320	Pass
6165	43	ax (40MHz)	49/51.6 (MCS2)	37.93	41.80	320	Pass
6405	91	ax (40MHz)	271/286.8 (MCS11)	37.95	41.53	320	Pass
5985	7	ax (80MHz)	102/108.1 (MCS2)	77.14	82.36	320	Pass
6145	39	ax (80MHz)	102/108.1 (MCS2)	77.18	82.31	320	Pass
6385	87	ax (80MHz)	102/108.1 (MCS2)	77.25	82.27	320	Pass
6025	15	ax (160MHz)	1020.8/1201 (MCS11)	156.34	165.90	320	Pass
6185	47	ax (160MHz)	1020.8/1201 (MCS11)	156.06	165.91	320	Pass
6345	79	ax (160MHz)	183.8/216.2 (MCS2)	156.21	165.39	320	Pass
6435	97	a	12.00	16.76	21.11	320	Pass
6475	105	a	12.00	16.76	21.09	320	Pass
6515	113	a	12.00	16.78	21.12	320	Pass
6435	97	ax (20MHz)	49/51.6 (MCS4)	19.03	21.43	320	Pass
6475	105	ax (20MHz)	135/143.4 (MCS11)	19.04	21.44	320	Pass
6515	113	ax (20MHz)	49/51.6 (MCS4)	19.04	21.36	320	Pass
6445	99	ax (40MHz)	49/51.6 (MCS2)	37.96	41.56	320	Pass
6485	107	ax (40MHz)	49/51.6 (MCS2)	37.93	41.72	320	Pass
6525	115	ax (40MHz)	49/51.6 (MCS2)	37.95	41.87	320	Pass
6465	103	ax (80MHz)	102/108.1 (MCS2)	77.20	82.13	320	Pass
6505	111	ax (160MHz)	183.8/216.2 (MCS2)	156.49	165.84	320	Pass
6535	117	a	12.00	16.74	20.98	320	Pass
6695	149	a	12.00	16.78	21.03	320	Pass
6875	185	a	12.00	16.77	21.11	320	Pass
6535	117	ax (20MHz)	49/51.6 (MCS4)	19.02	21.44	320	Pass
6695	149	ax (20MHz)	24/25.8 (MCS2)	19.07	21.40	320	Pass
6875	185	ax (20MHz)	135/143.4 (MCS11)	19.06	21.44	320	Pass
6565	123	ax (40MHz)	49/51.6 (MCS2)	37.98	41.56	320	Pass
6725	155	ax (40MHz)	49/51.6 (MCS2)	37.99	41.94	320	Pass
6885	179	ax (40MHz)	49/51.6 (MCS2)	37.96	41.50	320	Pass
6545	119	ax (80MHz)	102/108.1 (MCS2)	77.22	82.25	320	Pass
6705	151	ax (80MHz)	204/216.2 (MCS4)	77.22	82.10	320	Pass
6865	183	ax (80MHz)	102/108.1 (MCS2)	77.26	82.46	320	Pass
6665	143	ax (160MHz)	1020.8/1201 (MCS11)	156.29	166.13	320	Pass
6825	175	ax (160MHz)	367.5/432.4 (MCS4)	156.35	166.20	320	Pass
6895	189	a	12.00	16.78	21.09	320	Pass
6995	209	a	12.00	16.72	21.08	320	Pass
7115	233	a	12.00	16.76	21.05	320	Pass
6895	189	ax (20MHz)	135/143.4 (MCS11)	19.06	21.33	320	Pass
6995	209	ax (20MHz)	135/143.4 (MCS11)	19.05	21.13	320	Pass
7115	233	ax (20MHz)	135/143.4 (MCS11)	19.03	21.41	320	Pass
6885	187	ax (40MHz)	49/51.6 (MCS2)	37.95	41.64	320	Pass
7005	211	ax (40MHz)	49/51.6 (MCS2)	37.93	41.62	320	Pass
7085	227	ax (40MHz)	49/51.6 (MCS2)	37.92	41.67	320	Pass
6945	199	ax (80MHz)	102/108.1 (MCS2)	77.20	82.43	320	Pass
7025	215	ax (80MHz)	102/108.1 (MCS2)	77.12	82.31	320	Pass
6985	207	ax (160MHz)	1020.8/1201 (MCS11)	156.47	166.08	320	Pass

Table 7-3. Conducted Bandwidth Measurements Antenna WF8

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 23 of 188

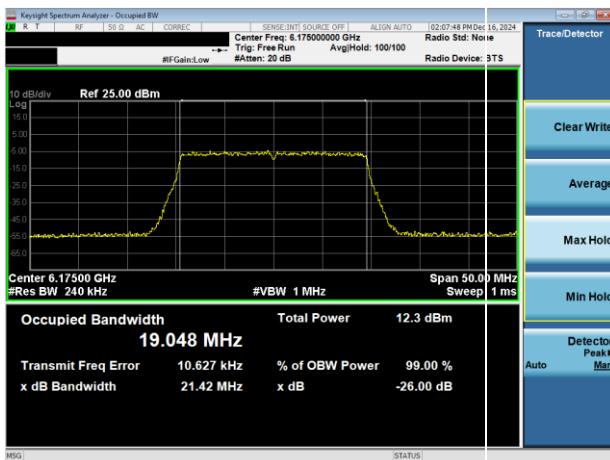

Plot 7-13. 26dB & 99% Bandwidth Plot Antenna WF8 (20MHz 802.11ax (UNII Band 5) – Ch. 45)

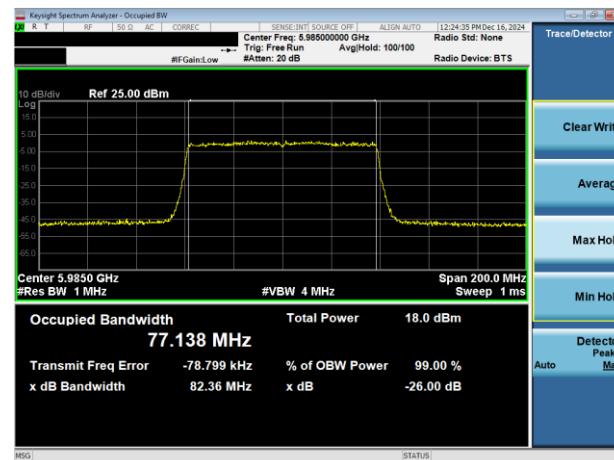

Plot 7-15. 26dB & 99% Bandwidth Plot Antenna WF8 (80MHz 802.11ax (UNII Band 5) – Ch. 7)




Plot 7-14. 26dB & 99% Bandwidth Plot Antenna WF8 (40MHz 802.11ax (UNII Band 5) – Ch. 3.)



Plot 7-16. 26dB & 99% Bandwidth Plot Antenna WF8 (160MHz 802.11ax (UNII Band 5) – Ch. 47)

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 24 of 188

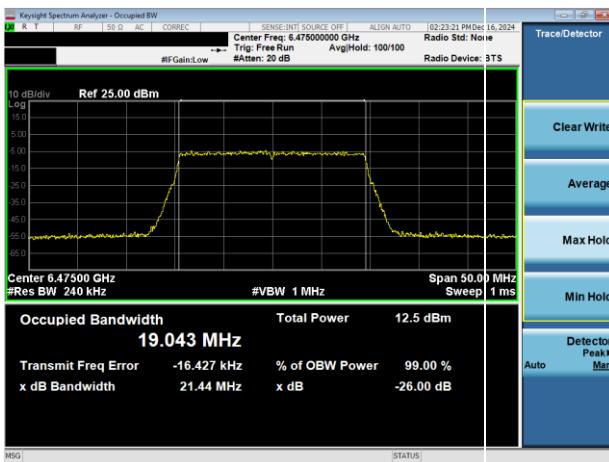


Plot 7-17. 26dB & 99% Bandwidth Plot Antenna WF8 (20MHz 802.11ax (UNII Band 6) – Ch. 105)



Plot 7-19. 26dB & 99% Bandwidth Plot Antenna WF8 (80MHz 802.11ax (UNII Band 6) – Ch. 103)



Plot 7-18. 26dB & 99% Bandwidth Plot Antenna WF8 (40MHz 802.11ax (UNII Band 6) – Ch. 115)

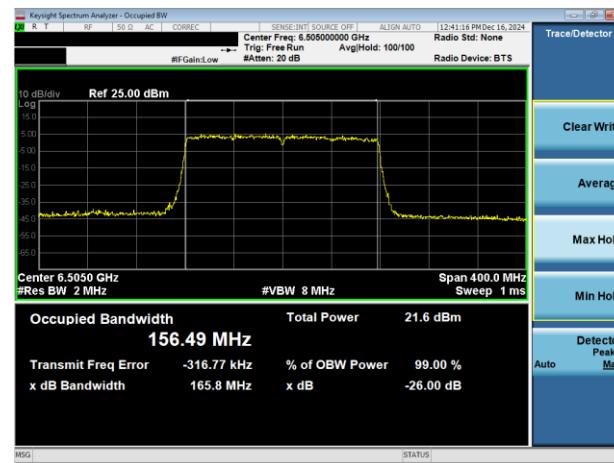


Plot 7-20. 26dB & 99% Bandwidth Plot Antenna WF8 (160MHz 802.11ax (UNII Band 6) – Ch. 111)


FCC ID: BCGA3266		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 25 of 188




Plot 7-21. 26dB & 99% Bandwidth Plot Antenna WF8 (20MHz 802.11ax (UNII Band 7) – Ch. 185)

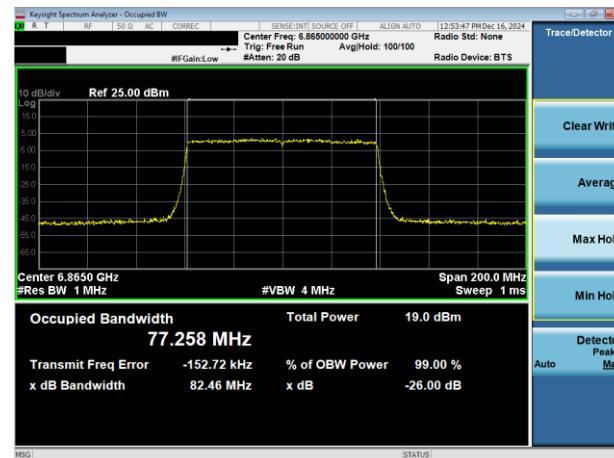

Plot 7-23. 26dB & 99% Bandwidth Plot Antenna WF8 (80MHz 802.11ax (UNII Band 7) – Ch. 183)

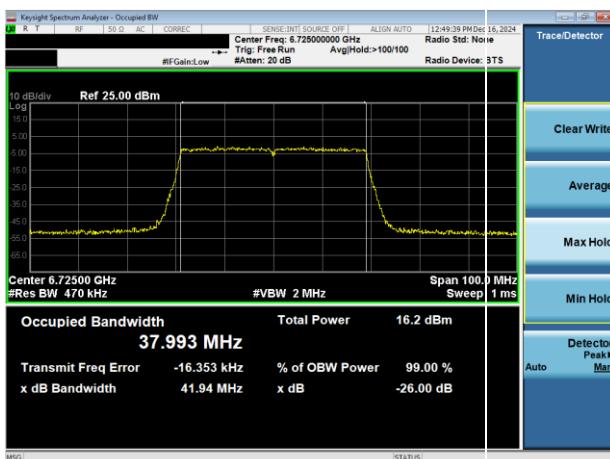

Plot 7-22. 26dB & 99% Bandwidth Plot Antenna WF8 (40MHz 802.11ax (UNII Band 7) – Ch. 155)

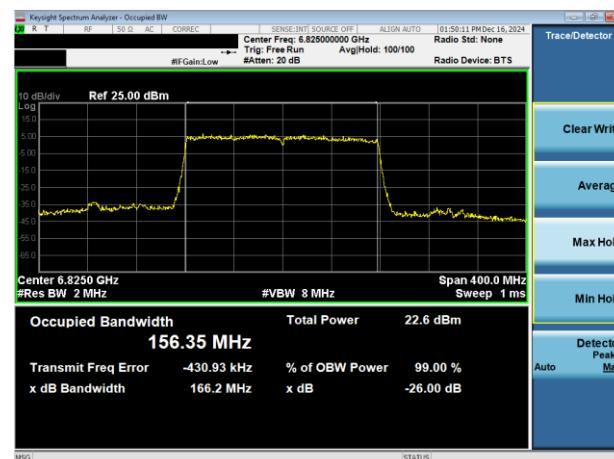


Plot 7-24. 26dB & 99% Bandwidth Plot Antenna WF8 (160MHz 802.11ax (UNII Band 7) – Ch. 175)


FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 26 of 188



Plot 7-25. 26dB & 99% Bandwidth Plot Antenna WF8 (20MHz 802.11ax (UNII Band 8) – Ch. 233)

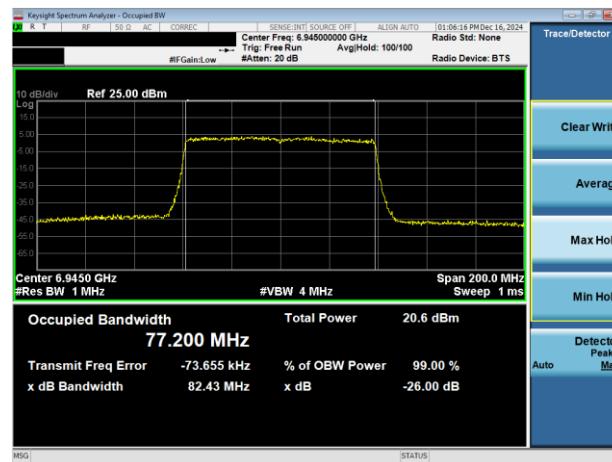

Plot 7-27. 26dB & 99% Bandwidth Plot Antenna WF8 (80MHz 802.11ax (UNII Band 8) – Ch. 199)

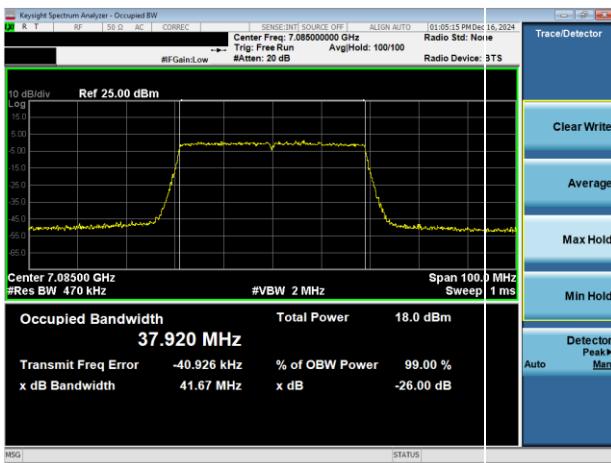

Plot 7-26. 26dB & 99% Bandwidth Plot Antenna WF8 (40MHz 802.11ax (UNII Band 8) – Ch. 227)



Plot 7-28. 26dB & 99% Bandwidth Plot Antenna WF8 (160MHz 802.11ax (UNII Band 8) – Ch. 207)


FCC ID: BCGA3266		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 27 of 188

7.2.3 Antenna WF7a 26dB & 99% Bandwidth Measurements – SP


Frequency [MHz]	Channel	802.11 MODE	Data Rate [Mbps]	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]	Maximum Bandwidth Limit [MHz]	Pass / Fail
5955	1	a	12.00	16.79	21.18	320	Pass
6175	45	a	12.00	16.75	21.04	320	Pass
6415	93	a	12.00	16.77	21.17	320	Pass
5955	1	ax (20MHz)	49/51.6 (MCS4)	19.05	21.43	320	Pass
6175	45	ax (20MHz)	135/143.4 (MCS11)	19.09	21.29	320	Pass
6415	93	ax (20MHz)	24/25.8 (MCS2)	19.07	21.31	320	Pass
5965	3	ax (40MHz)	98/103.2 (MCS4)	37.94	41.58	320	Pass
6165	43	ax (40MHz)	49/51.6 (MCS2)	37.94	41.64	320	Pass
6405	91	ax (40MHz)	49/51.6 (MCS2)	37.96	41.61	320	Pass
5985	7	ax (80MHz)	204/216.2 (MCS4)	77.21	82.13	320	Pass
6145	39	ax (80MHz)	102/108.1 (MCS2)	77.21	82.34	320	Pass
6385	87	ax (80MHz)	204/216.2 (MCS4)	77.30	82.29	320	Pass
6025	15	ax (160MHz)	1020.8/1201 (MCS11)	156.52	167.13	320	Pass
6185	47	ax (160MHz)	1020.8/1201 (MCS11)	157.28	259.35	320	Pass
6345	79	ax (160MHz)	1020.8/1201 (MCS11)	157.15	241.52	320	Pass
6435	97	a	12.00	16.68	21.00	320	Pass
6475	105	a	12.00	16.71	20.94	320	Pass
6515	113	a	12.00	16.70	21.12	320	Pass
6345	97	ax (20MHz)	24/25.8 (MCS2)	18.99	21.12	320	Pass
6475	105	ax (20MHz)	24/25.8 (MCS2)	19.05	21.16	320	Pass
6515	113	ax (20MHz)	135/143.4 (MCS11)	19.05	21.16	320	Pass
6445	99	ax (40MHz)	49/51.6 (MCS2)	37.91	41.19	320	Pass
6485	107	ax (40MHz)	49/51.6 (MCS2)	37.97	41.52	320	Pass
6525	115	ax (40MHz)	49/51.6 (MCS2)	37.94	41.43	320	Pass
6465	103	ax (80MHz)	102/108.1 (MCS2)	77.18	82.12	320	Pass
6505	111	ax (160MHz)	1020.8/1201 (MCS11)	156.86	165.99	320	Pass
6535	117	a	12.00	16.76	21.19	320	Pass
6695	149	a	12.00	16.77	21.12	320	Pass
6855	181	a	12.00	16.76	21.13	320	Pass
6535	117	ax (20MHz)	49/51.6 (MCS4)	19.03	21.34	320	Pass
6695	149	ax (20MHz)	24/25.8 (MCS2)	19.07	21.23	320	Pass
6855	181	ax (20MHz)	24/25.8 (MCS2)	19.05	21.48	320	Pass
6565	123	ax (40MHz)	49/51.6 (MCS2)	37.96	41.55	320	Pass
6725	155	ax (40MHz)	49/51.6 (MCS2)	37.96	41.58	320	Pass
6845	179	ax (40MHz)	49/51.6 (MCS2)	37.97	41.49	320	Pass
6625	135	ax (80MHz)	204/216.2 (MCS4)	77.50	82.55	320	Pass
6705	151	ax (80MHz)	102/108.1 (MCS2)	77.21	82.59	320	Pass
6785	167	ax (80MHz)	204/216.2 (MCS4)	77.37	82.45	320	Pass
6665	143	ax (160MHz)	1020.8/1201 (MCS11)	156.90	166.90	320	Pass

Table 7-4. Conducted Bandwidth Measurements Antenna WF7a

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 28 of 188

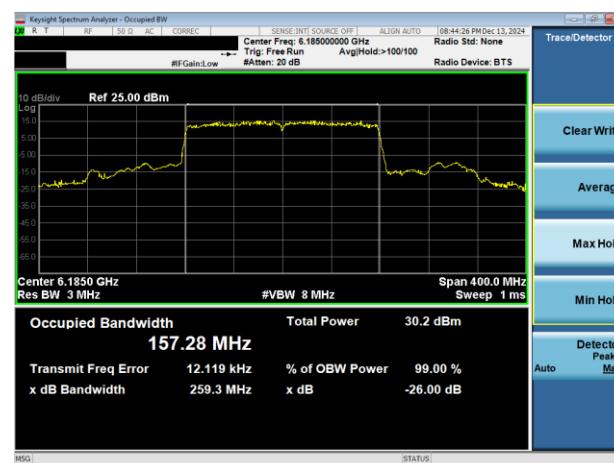

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 29 of 188

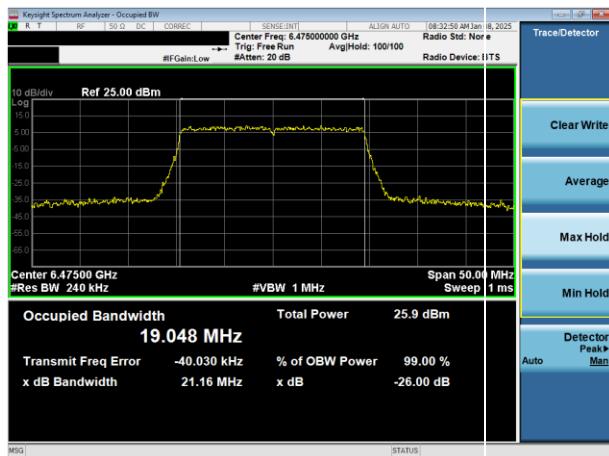

Plot 7-33. 26dB & 99% Bandwidth Plot Antenna WF7a (20MHz 802.11ax (UNII Band 6) – Ch. 105)



Plot 7-35. 26dB & 99% Bandwidth Plot Antenna WF7a (80MHz 802.11ax (UNII Band 6) – Ch. 103)




Plot 7-34. 26dB & 99% Bandwidth Plot Antenna WF7a (40MHz 802.11ax (UNII Band 6) – Ch. 107)



Plot 7-36. 26dB & 99% Bandwidth Plot Antenna WF7a (160MHz 802.11ax (UNII Band 6) – Ch. 111)

FCC ID: BCGA3266		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 30 of 188

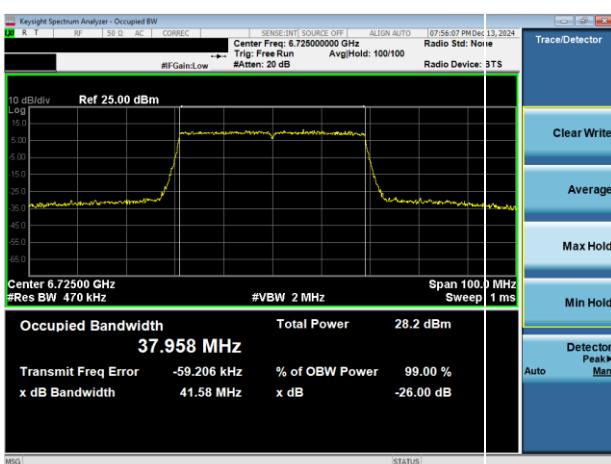

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 31 of 188

7.2.4 Antenna WF7a 26dB & 99% Bandwidth Measurements – LPI

Frequency [MHz]	Channel	802.11 MODE	Data Rate [Mbps]	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]	Maximum Bandwidth Limit [MHz]	Pass / Fail
5955	1	a	12.00	16.73	20.98	320	Pass
6175	45	a	12.00	16.77	21.00	320	Pass
6415	93	a	12.00	16.77	20.94	320	Pass
5955	1	ax (20MHz)	49/51.6 (MCS4)	19.04	21.35	320	Pass
6175	45	ax (20MHz)	24/25.8 (MCS2)	19.04	21.32	320	Pass
6415	93	ax (20MHz)	135/143.4 (MCS11)	19.04	21.33	320	Pass
5965	3	ax (40MHz)	271/286.8 (MCS11)	37.95	41.61	320	Pass
6165	43	ax (40MHz)	49/51.6 (MCS2)	37.95	41.81	320	Pass
6405	91	ax (40MHz)	49/51.6 (MCS2)	37.96	41.72	320	Pass
5985	7	ax (80MHz)	102/108.1 (MCS2)	77.18	82.26	320	Pass
6145	39	ax (80MHz)	204/216.2 (MCS4)	77.15	81.83	320	Pass
6385	87	ax (80MHz)	102/108.1 (MCS2)	77.24	82.11	320	Pass
6025	15	ax (160MHz)	367.5/432.4 (MCS4)	156.32	165.56	320	Pass
6185	47	ax (160MHz)	367.5/432.4 (MCS4)	156.08	165.67	320	Pass
6345	79	ax (160MHz)	183.8/216.2 (MCS2)	156.34	166.45	320	Pass
6435	97	a	12.00	16.78	21.06	320	Pass
6475	105	a	12.00	16.75	20.94	320	Pass
6515	113	a	12.00	16.76	20.91	320	Pass
6435	97	ax (20MHz)	135/143.4 (MCS11)	19.05	21.48	320	Pass
6475	105	ax (20MHz)	135/143.4 (MCS11)	19.08	21.34	320	Pass
6515	113	ax (20MHz)	24/25.8 (MCS2)	19.07	21.42	320	Pass
6445	99	ax (40MHz)	49/51.6 (MCS2)	37.96	41.65	320	Pass
6485	107	ax (40MHz)	271/286.8 (MCS11)	37.93	41.69	320	Pass
6525	115	ax (40MHz)	49/51.6 (MCS2)	37.93	41.62	320	Pass
6465	103	ax (80MHz)	102/108.1 (MCS2)	77.20	82.13	320	Pass
6505	111	ax (160MHz)	183.8/216.2 (MCS2)	156.28	165.86	320	Pass
6535	117	a	12.00	16.77	21.22	320	Pass
6695	149	a	12.00	16.75	20.84	320	Pass
6875	185	a	12.00	16.76	21.17	320	Pass
6535	117	ax (20MHz)	24/25.8 (MCS2)	19.05	21.48	320	Pass
6695	149	ax (20MHz)	135/143.4 (MCS11)	19.04	21.43	320	Pass
6875	185	ax (20MHz)	24/25.8 (MCS2)	19.07	21.46	320	Pass
6565	123	ax (40MHz)	49/51.6 (MCS2)	37.97	41.77	320	Pass
6725	155	ax (40MHz)	49/51.6 (MCS2)	37.94	41.64	320	Pass
6885	179	ax (40MHz)	49/51.6 (MCS2)	37.98	41.63	320	Pass
6545	119	ax (80MHz)	102/108.1 (MCS2)	77.13	82.11	320	Pass
6705	151	ax (80MHz)	102/108.1 (MCS2)	77.30	82.28	320	Pass
6865	183	ax (80MHz)	102/108.1 (MCS2)	77.24	82.17	320	Pass
6665	143	ax (160MHz)	1020.8/1201 (MCS11)	156.08	166.00	320	Pass
6825	175	ax (160MHz)	183.8/216.2 (MCS2)	156.38	166.53	320	Pass
6895	189	a	12.00	16.76	21.12	320	Pass
6995	209	a	12.00	16.76	20.94	320	Pass
7115	233	a	12.00	16.75	21.10	320	Pass
6895	189	ax (20MHz)	24/25.8 (MCS2)	19.04	21.42	320	Pass
6995	209	ax (20MHz)	49/51.6 (MCS4)	19.01	21.35	320	Pass
7115	233	ax (20MHz)	24/25.8 (MCS2)	19.06	21.39	320	Pass
6885	187	ax (40MHz)	49/51.6 (MCS2)	37.96	41.75	320	Pass
7005	211	ax (40MHz)	49/51.6 (MCS2)	37.99	41.85	320	Pass
7085	227	ax (40MHz)	49/51.6 (MCS2)	37.93	41.65	320	Pass
6945	199	ax (80MHz)	102/108.1 (MCS2)	77.23	82.67	320	Pass
7025	215	ax (80MHz)	102/108.1 (MCS2)	77.17	82.32	320	Pass
6985	207	ax (160MHz)	1020.8/1201 (MCS11)	156.35	166.24	320	Pass

Table 7-5. Conducted Bandwidth Measurements Antenna WF7a

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 32 of 188




Plot 7-41. 26dB & 99% Bandwidth Plot Antenna WF7a (20MHz) 802.11ax (UNII Band 5) – Ch. 1



Plot 7-43. 26dB & 99% Bandwidth Plot Antenna WF7a (80MHz) 802.11ax (UNII Band 5) – Ch. 7



Plot 7-42. 26dB & 99% Bandwidth Plot Antenna WF7a (40MHz) 802.11ax (UNII Band 5) – Ch. 43

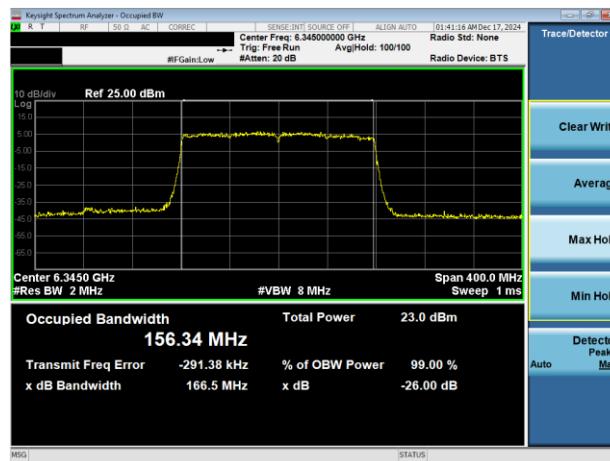


Plot 7-44. 26dB & 99% Bandwidth Plot Antenna WF7a (160MHz) 802.11ax (UNII Band 5) – Ch. 79

FCC ID: BCGA3266		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 33 of 188




Plot 7-45. 26dB & 99% Bandwidth Plot Antenna WF7a (20MHz 802.11ax (UNII Band 6) – Ch. 97)

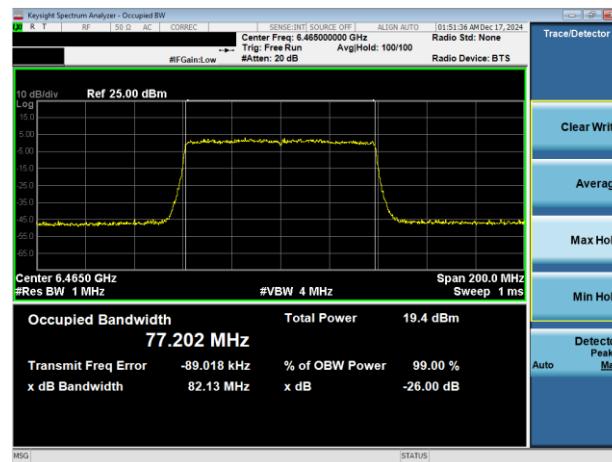

Plot 7-47. 26dB & 99% Bandwidth Plot Antenna WF7a (80MHz 802.11ax (UNII Band 6) – Ch. 103)




Plot 7-46. 26dB & 99% Bandwidth Plot Antenna WF7a (40MHz 802.11ax (UNII Band 6) – Ch. 107)

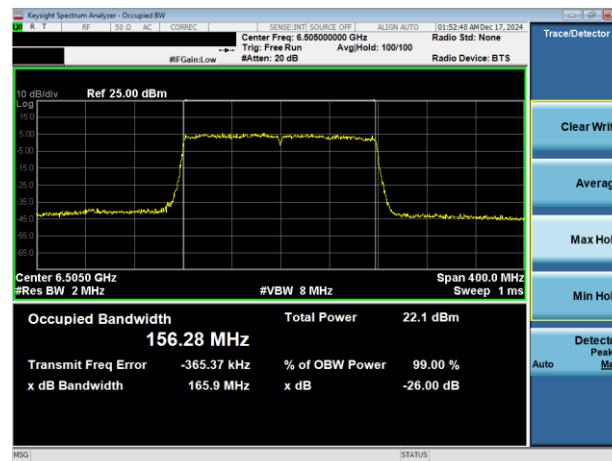


Plot 7-48. 26dB & 99% Bandwidth Plot Antenna WF7a (160MHz 802.11ax (UNII Band 6) – Ch. 111)

FCC ID: BCGA3266		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 34 of 188

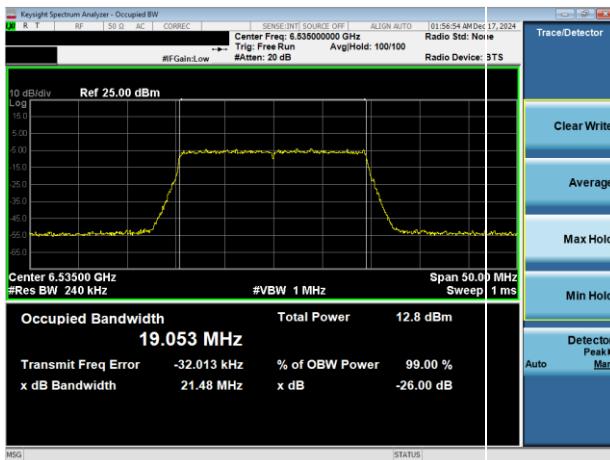

Plot 7-49. 26dB & 99% Bandwidth Plot Antenna WF7a (20MHz 802.11ax (UNII Band 7) – Ch. 117)

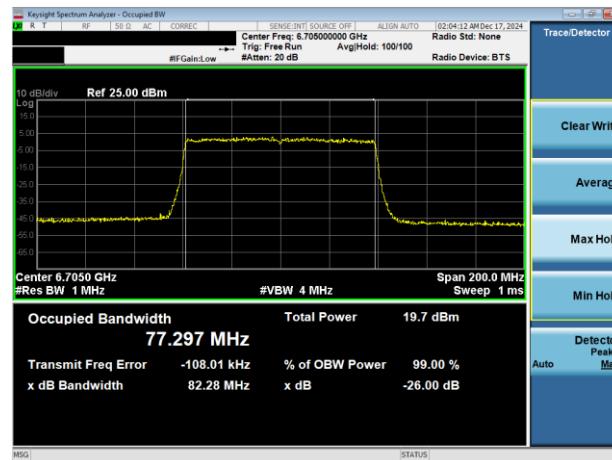

Plot 7-51. 26dB & 99% Bandwidth Plot Antenna WF7a (80MHz 802.11ax (UNII Band 7) – Ch. 151)



Plot 7-50. 26dB & 99% Bandwidth Plot Antenna WF7a (40MHz 802.11ax (UNII Band 7) – Ch. 123)



Plot 7-52. 26dB & 99% Bandwidth Plot Antenna WF7a (160MHz 802.11ax (UNII Band 7) – Ch. 175)

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 35 of 188



FCC ID: BCGA3266 IC: 579C-A3266		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 36 of 188

7.3 Conducted Output Power and Max EIRP Measurement

§15.407(a)(7)(8), RSS-248 [4.5.3], [4.5.5]

Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2020 and KDB 789033 D02 v02r01, and at the appropriate frequencies.

In the 5.925 – 7.125GHz band, the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm for Standard Power mode (SP), and 24dBm for Low Power Indoor mode (LPI).

Test Procedure Used

ANSI C63.10-2020 – Section 12.4.3.2 Method PM-G

KDB 789033 D02 v02r01 – Section E)3)b) Method PM-G

ANSI C63.10-2020 – Section 14.4 Measure-and-Sum Technique

KDB 662911 v02r01 – Section E)1) Measure-and-Sum Technique

Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup

Test Notes

None

FCC ID: BCGA3266 IC: 579C-A3266	element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device		Page 37 of 188

7.3.1 Antenna WF8 Conducted Output Power Measurements – SP

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]		Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11a	802.11ax				
5955	1	AVG	AVG	19.97	19.91	5.00	24.97	30.00	-5.03
6175	45	AVG	AVG	19.61	19.65	5.00	24.65	30.00	-5.35
6415	93	AVG	AVG	19.78	19.90	5.00	24.90	30.00	-5.10
6435	97	AVG	AVG	19.89	19.62	0.80	20.69	30.00	-9.31
6475	105	AVG	AVG	19.71	19.76	0.80	20.56	30.00	-9.44
6515	113	AVG	AVG	19.67	19.70	0.80	20.50	30.00	-9.50
6535	117	AVG	AVG	19.84	19.75	2.10	21.94	30.00	-8.06
6695	149	AVG	AVG	19.79	19.88	2.10	21.98	30.00	-8.02
6855	181	AVG	AVG	19.67	19.60	2.10	21.77	30.00	-8.23

Table 7-6. Antenna WF8 20MHz BW 802.11a/ax(SU) (UNII) Maximum Conducted Output Power

6GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
5965	3	AVG	AVG	19.66	5.00	24.66	30.00	-5.34
6165	43	AVG	AVG	19.76	5.00	24.76	30.00	-5.24
6405	91	AVG	AVG	19.99	5.00	24.99	30.00	-5.01
6445	99	AVG	AVG	19.83	0.80	20.63	30.00	-9.38
6485	107	AVG	AVG	19.89	0.80	20.69	30.00	-9.31
6525	115	AVG	AVG	19.82	2.10	21.92	30.00	-8.08
6565	123	AVG	AVG	19.90	2.10	22.00	30.00	-8.00
6725	155	AVG	AVG	19.85	2.10	21.95	30.00	-8.05
6845	179	AVG	AVG	19.62	2.10	21.72	30.00	-8.28

Table 7-7. Antenna WF8 40MHz BW 802.11a/ax(SU) (UNII) Maximum Conducted Output Power

6GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
5985	7	AVG	AVG	19.69	5.00	24.69	30.00	-5.31
6145	39	AVG	AVG	19.81	5.00	24.81	30.00	-5.19
6385	87	AVG	AVG	19.78	5.00	24.78	30.00	-5.22
6465	103	AVG	AVG	19.69	0.80	20.49	30.00	-9.51
6545	119	AVG	AVG	19.69	2.10	21.79	30.00	-8.21
6625	135	AVG	AVG	19.81	2.10	21.91	30.00	-8.09
6705	151	AVG	AVG	19.90	2.10	22.00	30.00	-8.00
6785	167	AVG	AVG	19.72	2.10	21.82	30.00	-8.18

Table 7-8. Antenna WF8 80MHz BW 802.11a/ax(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 38 of 188

6GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	6025	15	AVG	19.73	5.00	24.73	30.00	-5.27
	6185	47	AVG	19.76	5.00	24.76	30.00	-5.24
	6345	79	AVG	19.91	5.00	24.91	30.00	-5.09
	6505	111	AVG	19.80	0.80	20.60	30.00	-9.40
	6665	143	AVG	19.86	2.10	21.96	30.00	-8.04

Table 7-9. Antenna WF8 160MHz BW 802.11a/ax(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3266 IC: 579C-A3266	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device		

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.3.2 Antenna WF8 Conducted Output Power Measurements – LPI

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]		Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11a	802.11ax				
5955	1	AVG	AVG	3.49	3.94	5.00	8.94	24.00	-15.06
6175	45	AVG	AVG	3.88	4.34	5.00	9.34	24.00	-14.66
6415	93	AVG	AVG	4.62	5.46	5.00	10.46	24.00	-13.54
6435	97	AVG	AVG	4.11	4.90	0.80	5.70	24.00	-18.30
6475	105	AVG	AVG	4.49	4.70	0.80	5.50	24.00	-18.50
6515	113	AVG	AVG	4.16	4.90	0.80	5.70	24.00	-18.30
6535	117	AVG	AVG	4.65	5.49	2.10	7.59	24.00	-16.41
6695	149	AVG	AVG	4.96	5.47	2.10	7.57	24.00	-16.43
6875	185	AVG	AVG	4.97	5.15	2.10	7.25	24.00	-16.75
6895	189	AVG	AVG	6.66	7.06	1.50	8.56	24.00	-15.44
6995	209	AVG	AVG	6.64	7.12	1.50	8.62	24.00	-15.38
7115	233	AVG	AVG	6.59	7.04	1.50	8.54	24.00	-15.46

Table 7-10. Antenna WF8 20MHz BW 802.11a/ax(SU) (UNII) Maximum Conducted Output Power

6GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
5965	3	AVG	AVG	6.84	5.00	11.84	24.00	-12.16
6165	43	AVG	AVG	7.33	5.00	12.33	24.00	-11.67
6405	91	AVG	AVG	8.20	5.00	13.20	24.00	-10.80
6445	99	AVG	AVG	7.75	0.80	8.55	24.00	-15.45
6485	107	AVG	AVG	7.70	0.80	8.50	24.00	-15.50
6525	115	AVG	AVG	7.91	2.10	10.01	24.00	-13.99
6565	123	AVG	AVG	8.30	2.10	10.40	24.00	-13.60
6725	155	AVG	AVG	8.47	2.10	10.57	24.00	-13.43
6845	179	AVG	AVG	8.32	2.10	10.42	24.00	-13.58
6885	187	AVG	AVG	8.37	1.50	9.87	24.00	-14.14
7005	211	AVG	AVG	9.95	1.50	11.45	24.00	-12.55
7085	227	AVG	AVG	10.24	1.50	11.74	24.00	-12.27

Table 7-11. Antenna WF8 40MHz 802.11ax(SU) BW (UNII) Maximum Conducted Output Power

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 40 of 188

6GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5985	7	AVG	9.34	5.00	14.34	24.00	-9.66
	6145	39	AVG	9.85	5.00	14.85	24.00	-9.15
	6385	87	AVG	10.74	5.00	15.74	24.00	-8.26
	6465	103	AVG	10.43	0.80	11.23	24.00	-12.77
	6545	119	AVG	10.23	2.10	12.33	24.00	-11.68
	6705	151	AVG	10.81	2.10	12.91	24.00	-11.10
	6865	183	AVG	10.83	2.10	12.93	24.00	-11.07
	6945	199	AVG	12.67	1.50	14.17	24.00	-9.83
	7025	215	AVG	12.47	1.50	13.97	24.00	-10.03

Table 7-12. Antenna WF8 80MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

6GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	6025	15	AVG	11.85	5.00	16.85	24.00	-7.15
	6185	47	AVG	12.37	5.00	17.37	24.00	-6.64
	6345	79	AVG	13.20	5.00	18.20	24.00	-5.80
	6505	111	AVG	12.82	0.80	13.62	24.00	-10.38
	6665	143	AVG	13.22	2.10	15.32	24.00	-8.68
	6825	175	AVG	13.37	2.10	15.47	24.00	-8.53
	6985	207	AVG	14.81	1.50	16.31	24.00	-7.69

Table 7-13. Antenna WF8 160MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3266 IC: 579C-A3266	MEASUREMENT REPORT (CERTIFICATION)				Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device			

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Page 41 of 188

7.3.3 Antenna WF7a Conducted Output Power Measurements – SP

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]		Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11a	802.11ax				
5955	1	AVG	AVG	19.89	19.69	3.50	23.39	30.00	-6.61
6175	45	AVG	AVG	19.99	19.80	3.50	23.49	30.00	-6.51
6415	93	AVG	AVG	19.80	19.61	3.50	23.30	30.00	-6.70
6435	97	AVG	AVG	19.89	19.89	4.00	23.89	30.00	-6.11
6475	105	AVG	AVG	19.64	19.63	4.00	23.64	30.00	-6.36
6515	113	AVG	AVG	19.73	19.89	4.00	23.89	30.00	-6.11
6535	117	AVG	AVG	19.92	19.66	3.30	23.22	30.00	-6.78
6695	149	AVG	AVG	19.78	19.85	3.30	23.15	30.00	-6.85
6855	181	AVG	AVG	19.64	19.85	3.30	23.15	30.00	-6.85

Table 7-14. Antenna WF7a 20MHz BW 802.11a/ax(SU) (UNII) Maximum Conducted Output Power

6GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
5965	3	AVG	AVG	19.76	3.50	23.26	30.00	-6.74
6165	43	AVG	AVG	19.86	3.50	23.36	30.00	-6.64
6405	91	AVG	AVG	19.62	3.50	23.12	30.00	-6.88
6445	99	AVG	AVG	19.78	4.00	23.78	30.00	-6.22
6485	107	AVG	AVG	19.76	4.00	23.76	30.00	-6.24
6525	115	AVG	AVG	19.87	3.30	23.17	30.00	-6.84
6565	123	AVG	AVG	19.60	3.30	22.90	30.00	-7.10
6725	155	AVG	AVG	19.61	3.30	22.91	30.00	-7.09
6845	179	AVG	AVG	19.71	3.30	23.01	30.00	-6.99

Table 7-15. Antenna WF7a 40MHz BW 802.11a/ax(SU) (UNII) Maximum Conducted Output Power

6GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
5985	7	AVG	AVG	19.71	3.50	23.21	30.00	-6.79
6145	39	AVG	AVG	19.70	3.50	23.20	30.00	-6.80
6385	87	AVG	AVG	19.71	3.50	23.21	30.00	-6.79
6465	103	AVG	AVG	19.79	4.00	23.79	30.00	-6.21
6545	119	AVG	AVG	19.96	3.30	23.26	30.00	-6.74
6625	135	AVG	AVG	19.98	3.30	23.28	30.00	-6.72
6705	151	AVG	AVG	19.96	3.30	23.26	30.00	-6.74
6785	167	AVG	AVG	19.80	3.30	23.10	30.00	-6.90

Table 7-16. Antenna WF7a 80MHz BW 802.11a/ax(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 42 of 188

6GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	6025	15	AVG	19.68	3.50	23.18	30.00	-6.82
	6185	47	AVG	19.79	3.50	23.29	30.00	-6.71
	6345	79	AVG	19.71	3.50	23.21	30.00	-6.79
	6505	111	AVG	19.94	4.00	23.94	30.00	-6.06
	6665	143	AVG	19.54	3.30	22.84	30.00	-7.16

Table 7-17. Antenna WF7a 160MHz BW 802.11a/ax(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3266 IC: 579C-A3266	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device		

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.3.4 Antenna WF7a Conducted Output Power Measurements – LPI

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]		Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11a	802.11ax				
	5955	1	AVG	3.42	3.69	3.50	7.19	24.00	-16.81
	6175	45	AVG	3.80	4.41	3.50	7.91	24.00	-16.09
	6415	93	AVG	4.98	5.31	3.50	8.81	24.00	-15.19
	6435	97	AVG	4.10	4.80	4.00	8.80	24.00	-15.20
	6475	105	AVG	4.42	4.85	4.00	8.85	24.00	-15.16
	6515	113	AVG	4.33	4.74	4.00	8.74	24.00	-15.27
	6535	117	AVG	4.69	5.32	3.30	8.62	24.00	-15.38
	6695	149	AVG	4.86	5.44	3.30	8.74	24.00	-15.27
	6875	185	AVG	4.90	5.16	3.30	8.46	24.00	-15.54
	6895	189	AVG	6.51	7.19	1.70	8.89	24.00	-15.11
	6995	209	AVG	6.72	6.91	1.70	8.61	24.00	-15.39
	7115	233	AVG	6.59	7.13	1.70	8.83	24.00	-15.17

Table 7-18. Antenna WF7a 20MHz BW 802.11a/ax(SU) (UNII) Maximum Conducted Output Power

6GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5965	3	AVG	6.93	3.50	10.43	24.00	-13.57
	6165	43	AVG	7.40	3.50	10.90	24.00	-13.10
	6405	91	AVG	8.50	3.50	12.00	24.00	-12.01
	6445	99	AVG	7.70	4.00	11.70	24.00	-12.30
	6485	107	AVG	7.86	4.00	11.86	24.00	-12.14
	6525	115	AVG	7.81	3.30	11.11	24.00	-12.89
	6565	123	AVG	8.28	3.30	11.58	24.00	-12.42
	6725	155	AVG	8.45	3.30	11.75	24.00	-12.25
	6845	179	AVG	8.14	3.30	11.44	24.00	-12.57
	6885	187	AVG	8.16	1.70	9.86	24.00	-14.14
	7005	211	AVG	10.18	1.70	11.88	24.00	-12.12
	7085	227	AVG	10.06	1.70	11.76	24.00	-12.24

Table 7-19. Antenna WF7a 40MHz 802.11ax(SU) BW (UNII) Maximum Conducted Output Power

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 44 of 188

6GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5985	7	AVG	9.37	3.50	12.87	24.00	-11.13
	6145	39	AVG	9.81	3.50	13.31	24.00	-10.69
	6385	87	AVG	10.88	3.50	14.38	24.00	-9.62
	6465	103	AVG	10.48	4.00	14.48	24.00	-9.52
	6545	119	AVG	10.38	3.30	13.68	24.00	-10.32
	6705	151	AVG	10.85	3.30	14.15	24.00	-9.85
	6865	183	AVG	10.73	3.30	14.03	24.00	-9.97
	6945	199	AVG	12.69	1.70	14.39	24.00	-9.62
	7025	215	AVG	12.47	1.70	14.17	24.00	-9.83

Table 7-20. Antenna WF7a 80MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

6GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	6025	15	AVG	11.97	3.50	15.47	24.00	-8.53
	6185	47	AVG	12.48	3.50	15.98	24.00	-8.02
	6345	79	AVG	13.37	3.50	16.87	24.00	-7.13
	6505	111	AVG	12.72	4.00	16.72	24.00	-7.28
	6665	143	AVG	13.43	3.30	16.73	24.00	-7.27
	6825	175	AVG	13.33	3.30	16.63	24.00	-7.37
	6985	207	AVG	15.07	1.70	16.77	24.00	-7.23

Table 7-21. Antenna WF7a 160MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 45 of 188

7.3.5 CDD/SDM Conducted Output Power Measurements – SP

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF8	Antenna WF7a	Summed				
	5955	1	SDM	AVG	19.65	19.39	22.53	4.31	26.84	30.00	-3.16
6175	45	SDM	AVG	AVG	19.62	19.84	22.74	4.31	27.05	30.00	-2.95
6415	93	SDM	AVG	AVG	19.56	19.69	22.64	4.31	26.95	30.00	-3.05
6435	97	SDM	AVG	AVG	19.62	19.80	22.72	2.69	25.41	30.00	-4.59
6475	105	SDM	AVG	AVG	19.98	19.81	22.90	2.69	25.59	30.00	-4.41
6515	113	SDM	AVG	AVG	19.89	19.75	22.83	2.69	25.52	30.00	-4.48
6535	117	SDM	AVG	AVG	19.86	19.97	22.92	2.74	25.66	30.00	-4.34
6695	149	SDM	AVG	AVG	19.89	19.94	22.93	2.74	25.67	30.00	-4.33
6855	181	SDM	AVG	AVG	19.82	19.69	22.76	2.74	25.50	30.00	-4.50

Table 7-22. SDM 20MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

6GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF8	Antenna WF7a	Summed				
	5965	3	SDM	AVG	19.71	19.86	22.79	4.31	27.10	30.00	-2.90
6165	43	CDD	AVG	AVG	19.80	19.82	22.82	5.00	27.82	30.00	-2.18
6405	91	CDD	AVG	AVG	19.74	19.83	22.80	5.00	27.80	30.00	-2.20
6445	99	CDD	AVG	AVG	19.64	19.60	22.63	4.00	26.63	30.00	-3.37
6485	107	CDD	AVG	AVG	19.89	19.61	22.76	4.00	26.76	30.00	-3.24
6525	115	CDD	AVG	AVG	19.80	19.99	22.91	3.30	26.21	30.00	-3.79
6565	123	CDD	AVG	AVG	19.88	19.94	22.92	3.30	26.22	30.00	-3.78
6725	155	CDD	AVG	AVG	19.74	19.89	22.83	3.30	26.13	30.00	-3.87
6845	179	CDD	AVG	AVG	19.68	19.67	22.68	3.30	25.98	30.00	-4.02

Table 7-23. CDD/SDM 40MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

6GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF8	Antenna WF7a	Summed				
	5985	7	CDD	AVG	19.70	19.90	22.81	5.00	27.81	30.00	-2.19
6145	39	CDD	AVG	AVG	19.89	19.82	22.86	5.00	27.86	30.00	-2.14
6385	87	CDD	AVG	AVG	19.79	19.86	22.84	5.00	27.84	30.00	-2.16
6465	103	CDD	AVG	AVG	19.64	19.98	22.82	4.00	26.82	30.00	-3.18
6545	119	CDD	AVG	AVG	19.67	19.94	22.82	3.30	26.12	30.00	-3.88
6625	135	CDD	AVG	AVG	19.92	19.88	22.91	3.30	26.21	30.00	-3.79
6705	151	CDD	AVG	AVG	19.97	19.83	22.91	3.30	26.21	30.00	-3.79
6785	167	CDD	AVG	AVG	19.91	19.96	22.94	3.30	26.24	30.00	-3.76

Table 7-24. CDD 80MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

6GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF8	Antenna WF7a	Summed				
	6025	15	CDD	AVG	19.80	19.66	22.74	5.00	27.74	30.00	-2.26
6185	47	CDD	AVG	AVG	19.83	19.64	22.75	5.00	27.75	30.00	-2.25
6345	79	CDD	AVG	AVG	19.64	19.69	22.67	5.00	27.67	30.00	-2.33
6505	111	CDD	AVG	AVG	19.86	20.00	22.94	4.00	26.94	30.00	-3.06
6665	143	CDD	AVG	AVG	19.96	19.69	22.84	3.30	26.14	30.00	-3.86

Table 7-25. CDD 160MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 46 of 188

7.3.6 SDM Conducted Output Power Measurements – LPI

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF8	Antenna WF7a	Summed				
	5955	1	SDM	AVG	1.42	1.49	4.47	4.31	8.78	24.00	-15.22
	6175	45	SDM	AVG	2.12	2.15	5.15	4.31	9.46	24.00	-14.54
	6415	93	SDM	AVG	2.87	2.89	5.89	4.31	10.20	24.00	-13.80
	6435	97	SDM	AVG	3.08	3.02	6.06	2.69	8.75	24.00	-15.25
	6475	105	SDM	AVG	2.98	3.12	6.06	2.69	8.75	24.00	-15.25
	6515	113	SDM	AVG	3.16	3.04	6.11	2.69	8.80	24.00	-15.20
	6535	117	SDM	AVG	2.88	3.16	6.03	2.74	8.77	24.00	-15.23
	6695	149	SDM	AVG	2.97	3.02	6.00	2.74	8.74	24.00	-15.26
	6875	185	SDM	AVG	3.24	3.00	6.13	2.74	8.87	24.00	-15.13
	6895	189	SDM	AVG	4.00	4.20	7.11	1.60	8.71	24.00	-15.29
	6995	209	SDM	AVG	4.01	4.02	7.03	1.60	8.63	24.00	-15.37
	7115	233	SDM	AVG	4.04	3.91	6.98	1.60	8.58	24.00	-15.42

Table 7-26. SDM 20MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

6GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF8	Antenna WF7a	Summed				
	5965	3	SDM	AVG	4.54	4.60	7.58	4.31	11.89	24.00	-12.11
	6165	43	SDM	AVG	5.14	5.11	8.14	4.31	12.45	24.00	-11.55
	6405	91	SDM	AVG	5.91	5.65	8.79	4.31	13.10	24.00	-10.90
	6445	99	SDM	AVG	6.18	5.94	9.07	2.69	11.76	24.00	-12.24
	6485	107	SDM	AVG	5.93	6.16	9.06	2.69	11.75	24.00	-12.25
	6525	115	SDM	AVG	5.96	6.08	9.03	2.74	11.77	24.00	-12.23
	6565	123	SDM	AVG	5.90	6.20	9.06	2.74	11.80	24.00	-12.20
	6725	155	SDM	AVG	6.09	6.05	9.08	2.74	11.82	24.00	-12.18
	6845	179	SDM	AVG	5.94	5.87	8.91	2.74	11.65	24.00	-12.35
	6885	187	SDM	AVG	6.02	5.83	8.94	1.60	10.54	24.00	-13.46
	7005	211	SDM	AVG	7.07	6.86	9.97	1.60	11.57	24.00	-12.43
	7085	227	SDM	AVG	7.22	7.20	10.22	1.60	11.82	24.00	-12.18

Table 7-27. SDM 40MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

6GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF8	Antenna WF7a	Summed				
	5985	7	SDM	AVG	7.23	6.90	10.08	4.31	14.39	24.00	-9.61
	6145	39	SDM	AVG	7.74	7.51	10.64	4.31	14.95	24.00	-9.05
	6385	87	SDM	AVG	8.29	8.10	11.21	4.31	15.52	24.00	-8.48
	6465	103	SDM	AVG	8.61	8.43	11.53	2.69	14.22	24.00	-9.78
	6545	119	SDM	AVG	8.53	8.45	11.50	2.74	14.24	24.00	-9.76
	6705	151	SDM	AVG	8.57	8.56	11.58	2.74	14.32	24.00	-9.68
	6865	183	SDM	AVG	8.47	8.45	11.47	2.74	14.21	24.00	-9.79
	6945	199	SDM	AVG	9.60	9.63	12.62	1.60	14.22	24.00	-9.78
	7025	215	SDM	AVG	9.41	9.48	12.45	1.60	14.05	24.00	-9.95

Table 7-28. SDM 80MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 47 of 188

6GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF8	Antenna WF7a	Summed				
6025	15	SDM	AVG	9.40	9.47	12.44	4.31	16.75	24.00	-7.25	
6185	47	SDM	AVG	10.16	10.00	13.09	4.31	17.40	24.00	-6.60	
6345	79	SDM	AVG	10.81	10.91	13.87	4.31	18.18	24.00	-5.82	
6505	111	SDM	AVG	11.06	10.99	14.04	2.69	16.73	24.00	-7.27	
6665	143	SDM	AVG	11.04	11.18	14.12	2.74	16.86	24.00	-7.14	
6825	175	SDM	AVG	11.11	10.92	14.02	2.74	16.76	24.00	-7.24	
6985	207	SDM	AVG	12.24	12.15	15.21	1.60	16.81	24.00	-7.19	

Table 7-29. SDM 160MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 48 of 188

**Note:**

Per ANSI C63.10-2020 and KDB 662911 v02r01 Section E)1), the conducted powers at Antenna WF8 and Antenna WF7a were first measured separately during SDM transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10-2020 Section 14.4.3, the directional gain is calculated using the following formula, where G_N is the gain of the nth antenna and N_{ANT} , the total number of antennas used.

$$\text{Directional gain} = G_{\text{Ant}} + \text{Array Gain dBi}$$

Per ANSI C63.10-2020 Section 14.4.3, the uncorrelated directional gain is calculated using the following formula, where G_N is the gain of the nth antenna and N_{ANT} , the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/10} + 10^{G_2/10} + \dots + 10^{G_N/10}) / N_{ANT}] \text{ dBi}$$

Sample SDM Calculation:

At 5955MHz in 802.11ax (20MHz BW) mode, the average conducted output power was measured to be 4.81 dBm for Antenna WF8 and 4.94 dBm for Antenna WF7a.

$$\text{Antenna WF8} + \text{Antenna WF7a} = \text{SDM}$$

$$(4.81 \text{ dBm} + 4.94 \text{ dBm}) = (3.027 \text{ mW} + 3.119 \text{ mW}) = 6.152 \text{ mW} = 7.89 \text{ dBm}$$

Sample e.i.r.p. Calculation:

At 5955MHz in 802.11ax (20MHz BW) mode, the average SDM conducted power was calculated to be 7.89 dBm with directional gain of 0.73 dBi.

$$\text{e.i.r.p. (dBm)} = \text{Conducted Power (dBm)} + \text{Ant gain (dBi)}$$

$$7.89 \text{ dBm} + 0.73 \text{ dBi} = 8.62 \text{ dBm}$$

FCC ID: BCGA3266 IC: 579C-A3266		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 49 of 188

7.4 Maximum Power Spectral Density

§15.407(a)(7)(8), RSS-248 [4.5.3], [4.5.5]

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2020 and KDB 789033 D02 v02r01, and at the appropriate frequencies. Method SA-1, as defined in ANSI C63.10-2020 and KDB 789033 D02 v02r01, was used to measure the power spectral density.

The maximum permissible power spectral density must not exceed -1dBm e.i.r.p. in any 1-megahertz band for Low Power Indoor operating modes.

The maximum permissible power spectral density must not exceed 17dBm e.i.r.p. in any 1-megahertz band for Standard Power operating modes.

Test Procedure Used

ANSI C63.10-2020 – Section 12.4.2.2

KDB 789033 D02 v02r01 – Section F

ANSI C63.10-2020 – Section 14.5.2.2 Measure-and-Sum Technique

KDB 662911 v02r01 – Section E)2) Measure-and-Sum Technique

Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Set span to encompass the entire 99% OBW of the signal
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times (\text{span}/\text{RBW})$
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run for all modes
9. Trace was averaged over 100 sweeps
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup

Test Notes

1. All data rates have been investigated, and tabular data has been reported. Only the worst-case plot per bandwidth was reported.


FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 50 of 188

7.4.1 Antenna WF8 Power Spectral Density Measurements – SP


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm/MHz]	Antenna Gain [dBi]	e.i.r.p Density [dBm/MHz]	Max EIRP Density [dBm/MHz]	Margin [dB]
Band 5	5955	1	a	54	8.07	5.00	13.07	17	-3.93
	6175	45	a	54	8.10	5.00	13.10	17	-3.90
	6415	93	a	54	7.93	5.00	12.93	17	-4.07
	5955	1	ax (20MHz)	24/25.8 (MCS2)	7.59	5.00	12.59	17	-4.41
	6175	45	ax (20MHz)	135/143.4 (MCS11)	7.61	5.00	12.61	17	-4.39
	6415	93	ax (20MHz)	135/143.4 (MCS11)	7.68	5.00	12.68	17	-4.32
	5965	3	ax (40MHz)	271/286.8 (MCS11)	4.84	5.00	9.84	17	-7.16
	6165	43	ax (40MHz)	271/286.8 (MCS11)	4.84	5.00	9.84	17	-7.16
	6405	91	ax (40MHz)	49/51.6 (MCS2)	4.78	5.00	9.78	17	-7.22
	5985	7	ax (80MHz)	204/216.2 (MCS4)	1.89	5.00	6.89	17	-10.11
	6145	39	ax (80MHz)	567/600.5 (MCS11)	2.11	5.00	7.11	17	-9.89
	6385	87	ax (80MHz)	567/600.5 (MCS11)	2.13	5.00	7.13	17	-9.87
	6025	15	ax (160MHz)	367.5/432.4 (MCS4)	-0.90	5.00	4.10	17	-12.90
	6181	47	ax (160MHz)	1020.8/1201 (MCS11)	-0.33	5.00	4.67	17	-12.33
	6345	79	ax (160MHz)	1020.8/1201 (MCS11)	-0.76	5.00	4.24	17	-12.76
Band 6	6435	97	a	12	7.94	0.80	8.74	17	-8.26
	6475	105	a	54	8.01	0.80	8.81	17	-8.19
	6515	113	a	54	7.69	0.80	8.49	17	-8.51
	6435	97	ax (20MHz)	49/51.6 (MCS4)	7.51	0.80	8.31	17	-8.69
	6475	105	ax (20MHz)	135/143.4 (MCS11)	7.43	0.80	8.23	17	-8.77
	6515	113	ax (20MHz)	135/143.4 (MCS11)	7.22	0.80	8.02	17	-8.98
	6445	99	ax (40MHz)	271/286.8 (MCS11)	4.91	0.80	5.71	17	-11.29
	6485	107	ax (40MHz)	271/286.8 (MCS11)	5.46	0.80	6.26	17	-10.74
	6525	115	ax (40MHz)	271/286.8 (MCS11)	5.49	0.80	6.29	17	-10.72
	6465	103	ax (80MHz)	102/108.1 (MCS2)	2.26	0.80	3.06	17	-13.94
	6505	111	ax (160MHz)	367.5/432.4 (MCS4)	-0.68	0.80	0.12	17	-16.88
Band 7	6535	117	a	12	7.98	2.10	10.08	17	-6.92
	6695	149	a	12	8.24	2.10	10.34	17	-6.66
	6875	181	a	54	8.00	2.10	10.10	17	-6.90
	6535	117	ax (20MHz)	135/143.4 (MCS11)	8.21	2.10	10.31	17	-6.70
	6695	149	ax (20MHz)	135/143.4 (MCS11)	8.32	2.10	10.42	17	-6.59
	6875	181	ax (20MHz)	135/143.4 (MCS11)	7.34	2.10	9.44	17	-7.56
	6565	123	ax (40MHz)	271/286.8 (MCS11)	4.95	2.10	7.05	17	-9.95
	6725	155	ax (40MHz)	98/103.2 (MCS4)	4.37	2.10	6.47	17	-10.53
	6845	179	ax (40MHz)	271/286.8 (MCS11)	4.26	2.10	6.36	17	-10.64
	6545	119	ax (80MHz)	567/600.5 (MCS11)	2.06	2.10	4.16	17	-12.85
	6625	135	ax (80MHz)	567/600.5 (MCS11)	1.06	2.10	3.16	17	-13.84
	6705	151	ax (80MHz)	204/216.2 (MCS4)	1.66	2.10	3.76	17	-13.24
	6865	167	ax (80MHz)	204/216.2 (MCS4)	1.64	2.10	3.74	17	-13.26
	6665	143	ax (160MHz)	1020.8/1201 (MCS11)	-1.13	2.10	0.97	17	-16.03

Table 7-30. Power Spectral Density Measurements Antenna WF8


FCC ID: BCGA3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 51 of 188

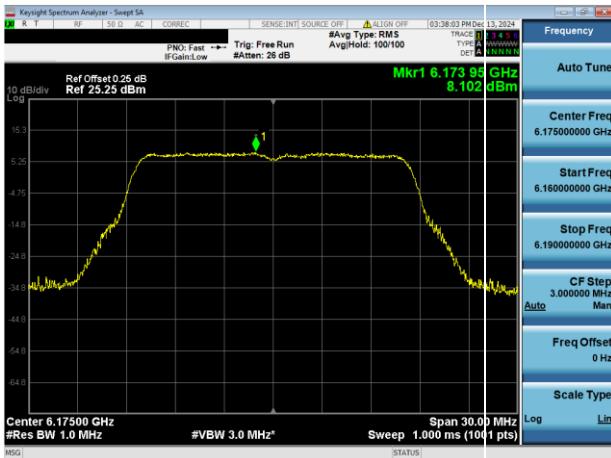


Plot 7-57. Power Spectral Density Plot Antenna WF8 (20MHz 802.11a (UNII Band 5) – Ch. 45)

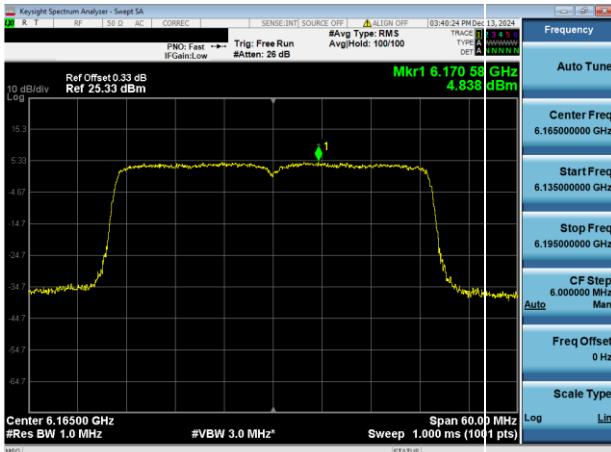

Plot 7-58. Power Spectral Density Plot Antenna WF8 (40MHz 802.11ax (UNII Band 5) – Ch. 43)

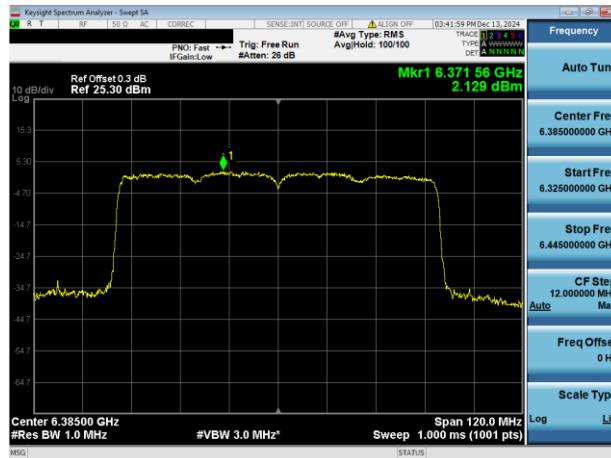


Plot 7-59. Power Spectral Density Plot Antenna WF8 (80MHz 802.11ax (UNII Band 5) – Ch. 87)

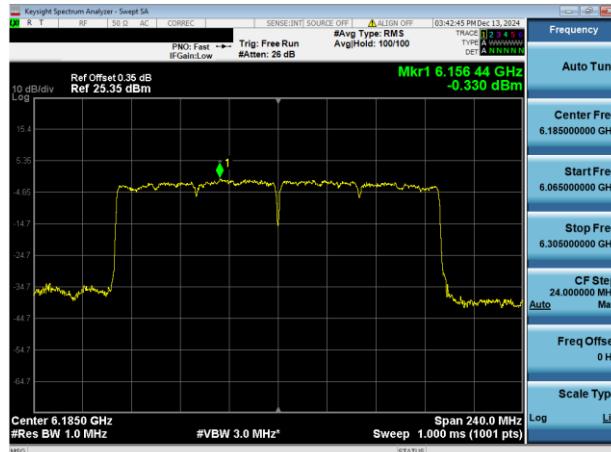


Plot 7-60. Power Spectral Density Plot Antenna WF8 (160MHz 802.11ax (UNII Band 5) – Ch. 47)


FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 52 of 188

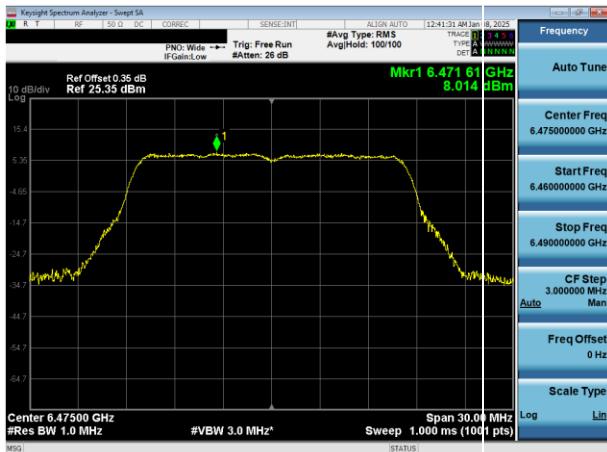


Plot 7-61. Power Spectral Density Plot Antenna WF8 (20MHz 802.11a (UNII Band 6) – Ch. 105)

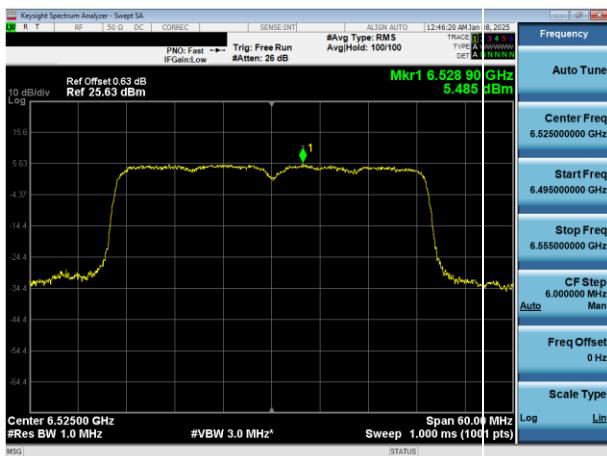

Plot 7-62. Power Spectral Density Plot Antenna WF8 (40MHz 802.11ax (UNII Band 6) – Ch. 115)

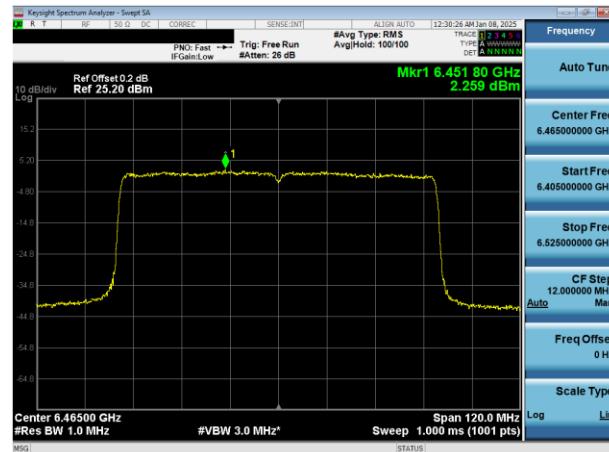

Plot 7-63. Power Spectral Density Plot Antenna WF8 (80MHz 802.11ax (UNII Band 6) – Ch. 103)

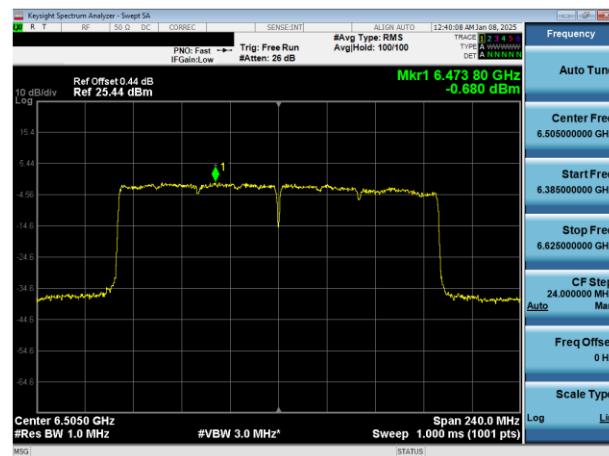


Plot 7-64. Power Spectral Density Plot Antenna WF8 (160MHz 802.11ax (UNII Band 6) – Ch. 111)

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 53 of 188




Plot 7-65. Power Spectral Density Plot Antenna WF8 (20MHz) 802.11ax (UNII Band 7) – Ch. 149

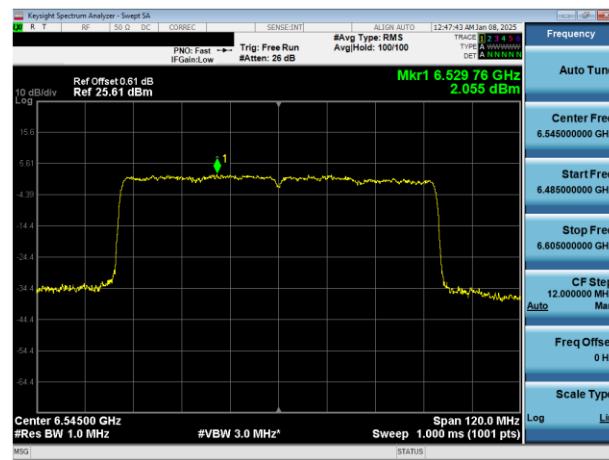

Plot 7-67. Power Spectral Density Plot Antenna WF8 (80MHz) 802.11ax (UNII Band 7) – Ch. 119



Plot 7-66. Power Spectral Density Plot Antenna WF8 (40MHz) 802.11ax (UNII Band 7) – Ch. 123

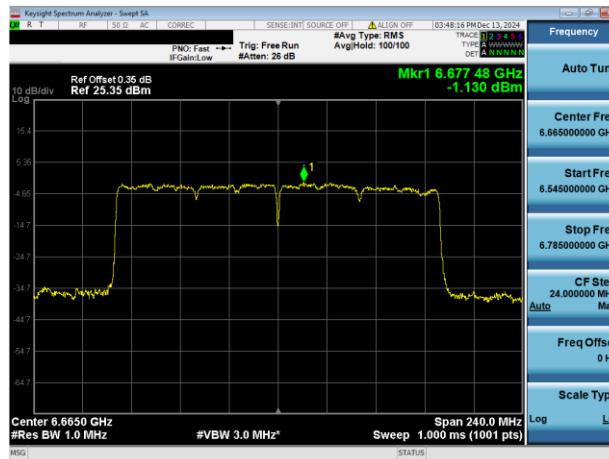

Plot 7-68. Power Spectral Density Plot Antenna WF8 (160MHz) 802.11ax (UNII Band 7) – Ch. 143

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 54 of 188

7.4.2 Antenna WF8 Power Spectral Density Measurements – LPI

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm/MHz]	Antenna Gain [dBi]	e.i.r.p Density [dBm/MHz]	Max EIRP Density [dBm/MHz]	Margin [dB]
Band 5	5955	1	a	12	-8.19	5.00	-3.19	-1	-2.19
	6175	45	a	24	-7.37	5.00	-2.37	-1	-1.37
	6415	93	a	54	-6.56	5.00	-1.56	-1	-0.56
	5955	1	ax (20MHz)	135/143.4 (MCS11)	-8.01	5.00	-3.01	-1	-2.01
	6175	45	ax (20MHz)	135/143.4 (MCS11)	-7.49	5.00	-2.49	-1	-1.49
	6415	93	ax (20MHz)	135/143.4 (MCS11)	-6.50	5.00	-1.50	-1	-0.50
	5965	3	ax (40MHz)	271/286.8 (MCS11)	-7.93	5.00	-2.93	-1	-1.93
	6165	43	ax (40MHz)	98/103.2 (MCS4)	-7.24	5.00	-2.24	-1	-1.24
	6405	91	ax (40MHz)	98/103.2 (MCS4)	-6.61	5.00	-1.61	-1	-0.61
	5985	7	ax (80MHz)	567/600.5 (MCS11)	-8.31	5.00	-3.31	-1	-2.31
	6145	39	ax (80MHz)	567/600.5 (MCS11)	-7.70	5.00	-2.70	-1	-1.70
	6385	87	ax (80MHz)	204/216.2 (MCS4)	-6.53	5.00	-1.53	-1	-0.53
	6025	15	ax (160MHz)	1020.8/1201 (MCS11)	-8.79	5.00	-3.79	-1	-2.79
	6185	47	ax (160MHz)	183.8/216.2 (MCS2)	-7.95	5.00	-2.95	-1	-1.95
	6345	79	ax (160MHz)	367.5/432.4 (MCS4)	-7.22	5.00	-2.22	-1	-1.22
Band 6	6435	97	a	24	-7.40	0.80	-6.60	-1	-5.60
	6475	105	a	54	-7.33	0.80	-6.53	-1	-5.53
	6515	113	a	54	-7.44	0.80	-6.64	-1	-5.64
	6435	97	ax (20MHz)	135/143.4 (MCS11)	-6.99	0.80	-6.19	-1	-5.19
	6475	105	ax (20MHz)	135/143.4 (MCS11)	-7.13	0.80	-6.33	-1	-5.33
	6515	113	ax (20MHz)	49/51.6 (MCS4)	-7.37	0.80	-6.57	-1	-5.57
	6445	99	ax (40MHz)	271/286.8 (MCS11)	-7.09	0.80	-6.29	-1	-5.29
	6485	107	ax (40MHz)	271/286.8 (MCS11)	-7.21	0.80	-6.41	-1	-5.41
	6525	115	ax (40MHz)	98/103.2 (MCS4)	-7.18	0.80	-6.38	-1	-5.38
	6465	103	ax (80MHz)	567/600.5 (MCS11)	-7.56	0.80	-6.76	-1	-5.76
	6505	111	ax (160MHz)	367.5/432.4 (MCS4)	-7.52	0.80	-6.72	-1	-5.72
Band 7	6535	117	a	54	-6.90	2.10	-4.80	-1	-3.80
	6695	149	a	54	-6.56	2.10	-4.46	-1	-3.46
	6875	185	a	24	-7.07	2.10	-4.97	-1	-3.97
	6535	117	ax (20MHz)	135/143.4 (MCS11)	-6.68	2.10	-4.58	-1	-3.58
	6695	149	ax (20MHz)	135/143.4 (MCS11)	-6.28	2.10	-4.18	-1	-3.18
	6875	185	ax (20MHz)	24/25.8 (MCS2)	-6.94	2.10	-4.84	-1	-3.84
	6565	123	ax (40MHz)	271/286.8 (MCS11)	-6.21	2.10	-4.11	-1	-3.11
	6725	155	ax (40MHz)	49/51.6 (MCS2)	-6.61	2.10	-4.51	-1	-3.51
	6845	179	ax (40MHz)	271/286.8 (MCS11)	-6.67	2.10	-4.57	-1	-3.57
	6545	119	ax (80MHz)	567/600.5 (MCS11)	-7.32	2.10	-5.22	-1	-4.22
	6705	151	ax (80MHz)	567/600.5 (MCS11)	-7.14	2.10	-5.04	-1	-4.04
	6865	183	ax (80MHz)	567/600.5 (MCS11)	-7.46	2.10	-5.36	-1	-4.36
	6665	143	ax (160MHz)	1020.8/1201 (MCS11)	-7.54	2.10	-5.44	-1	-4.44
	6825	175	ax (160MHz)	367.5/432.4 (MCS4)	-6.92	2.10	-4.82	-1	-3.82
Band 8	6895	189	a	54	-5.19	1.50	-3.69	-1	-2.69
	6995	209	a	54	-5.26	1.50	-3.76	-1	-2.76
	7115	233	a	54	-4.87	1.50	-3.37	-1	-2.37
	6895	189	ax (20MHz)	49/51.6 (MCS4)	-5.29	1.50	-3.79	-1	-2.79
	6995	209	ax (20MHz)	49/51.6 (MCS4)	-5.33	1.50	-3.83	-1	-2.83
	7115	233	ax (20MHz)	135/143.4 (MCS11)	-5.43	1.50	-3.93	-1	-2.93
	6885	187	ax (40MHz)	98/103.2 (MCS4)	-6.67	1.50	-5.17	-1	-4.17
	7005	211	ax (40MHz)	271/286.8 (MCS11)	-5.08	1.50	-3.58	-1	-2.58
	7085	227	ax (40MHz)	49/51.6 (MCS2)	-4.88	1.50	-3.38	-1	-2.38
	6945	199	ax (80MHz)	204/216.2 (MCS4)	-5.83	1.50	-4.33	-1	-3.33
	7025	215	ax (80MHz)	567/600.5 (MCS11)	-6.14	1.50	-4.64	-1	-3.64
	6985	207	ax (160MHz)	1020.8/1201 (MCS11)	-5.49	1.50	-3.99	-1	-2.99

Table 7-31. Power Spectral Density Measurements Antenna WF8

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 55 of 188