


Mode 802.11ax-SU
Data Rate MCS11
Distance of Measurement 3 Meters
Operating Frequency 5955MHz
Channel 1


Mode 802.11ax-SU
Data Rate MCS11
Distance of Measurement 3 Meters
Operating Frequency 5955MHz
Channel 1

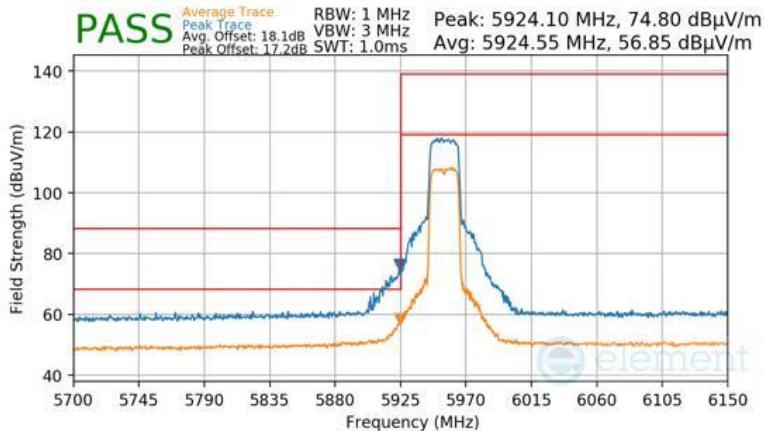

Plot 7-355 Antenna WF7a Radiated Lower Band Edge (Peak & Average – UNII Band 5)

Mode 802.11ax-SU
Data Rate MCS11
Distance of Measurement 3 Meters
Operating Frequency 7095MHz
Channel 229


Mode 802.11ax-SU
Data Rate MCS11
Distance of Measurement 3 Meters
Operating Frequency 7095MHz
Channel 229

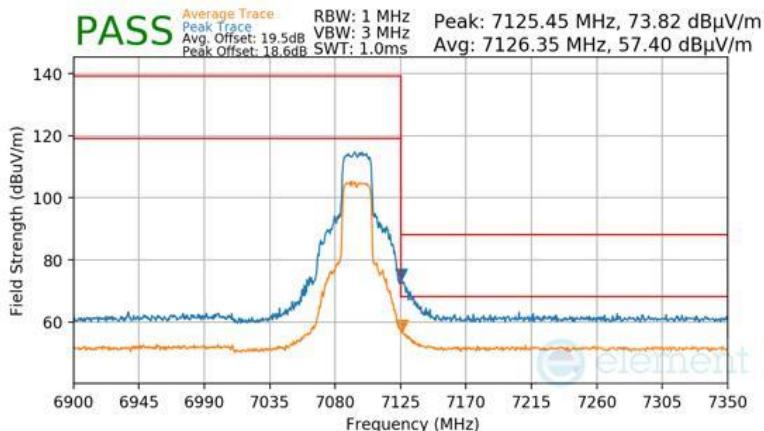


Plot 7-356 Antenna WF7a Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3266 IC: 579C-A3266	 element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 164 of 188

Mode 802.11ax-SU
Data Rate MCS11
Distance of Measurement 3 Meters
Operating Frequency 7115MHz
Channel 233

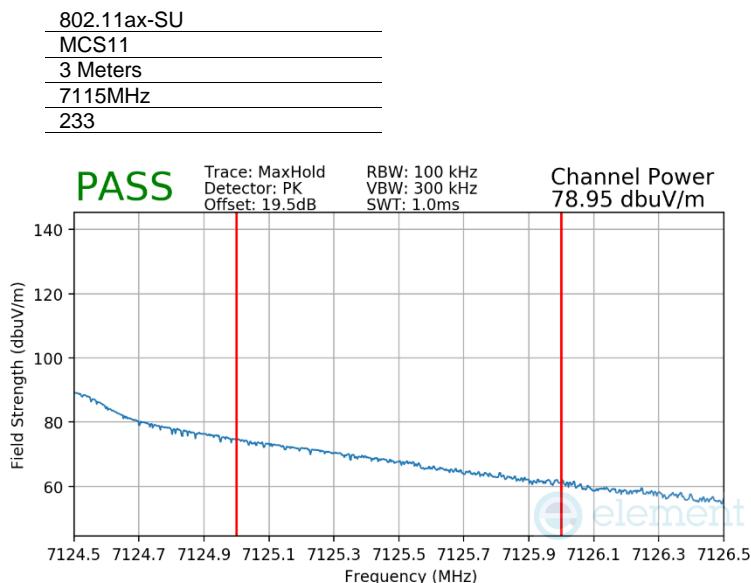

Plot 7-357 Antenna WF7a Radiated Upper Band Edge (Peak – UNII Band 8)

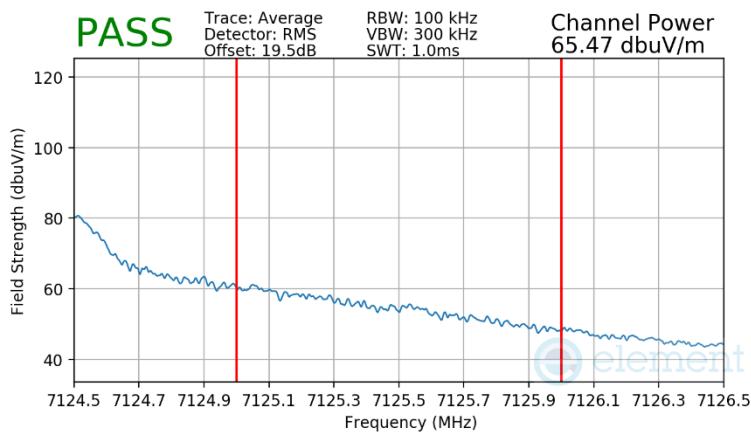


Plot 7-358 Antenna WF7a Radiated Upper Band Edge (Average – UNII Band 8)

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 165 of 188

7.7.7 Antenna WF7a Radiated Band Edge Measurements (40MHz BW)


§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Mode	802.11ax-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	5965MHz
Channel	3

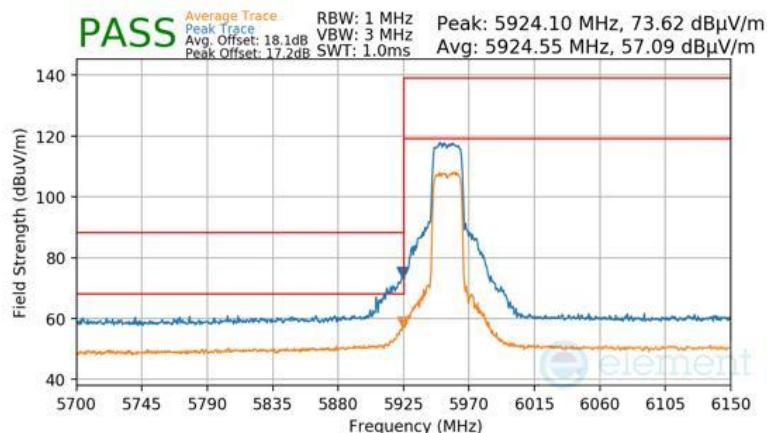

Plot 7-359 Antenna WF7a Radiated Lower Band Edge (Peak & Average – UNII Band 5)


Mode	802.11ax-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6005MHz
Channel	11

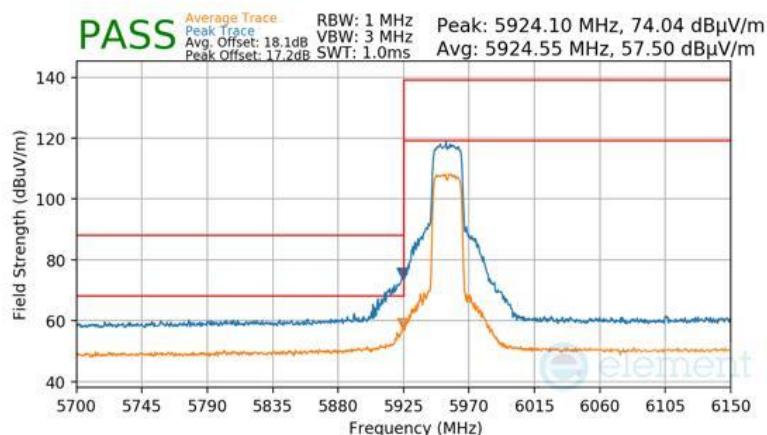

Plot 7-360 Antenna WF7a Radiated Lower Band Edge (Peak & Average – UNII Band 5)

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 166 of 188

Mode 802.11ax-SU
Data Rate MCS11
Distance of Measurement 3 Meters
Operating Frequency 7085MHz
Channel 227

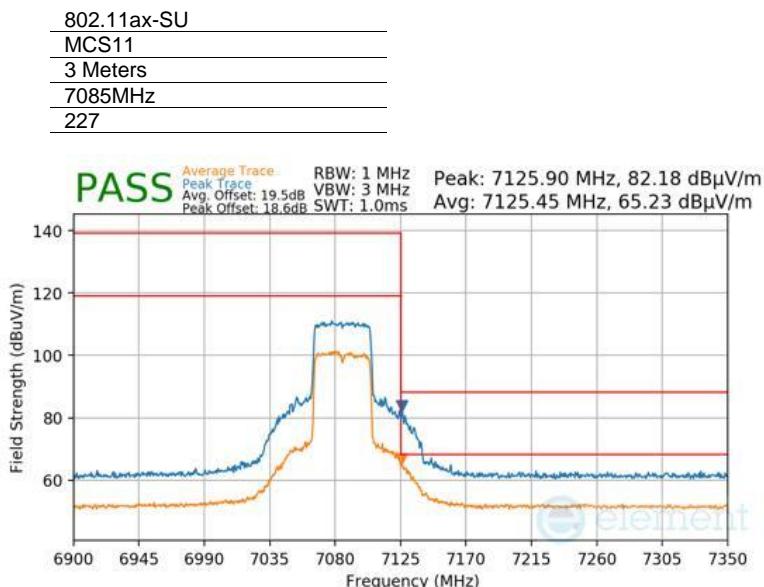


Plot 7-361 Antenna WF7a Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3266 IC: 579C-A3266	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 167 of 188

7.7.8 Antenna WF7a Radiated Band Edge Measurements (80MHz BW)


§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Mode	802.11ax-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	5985MHz
Channel	7

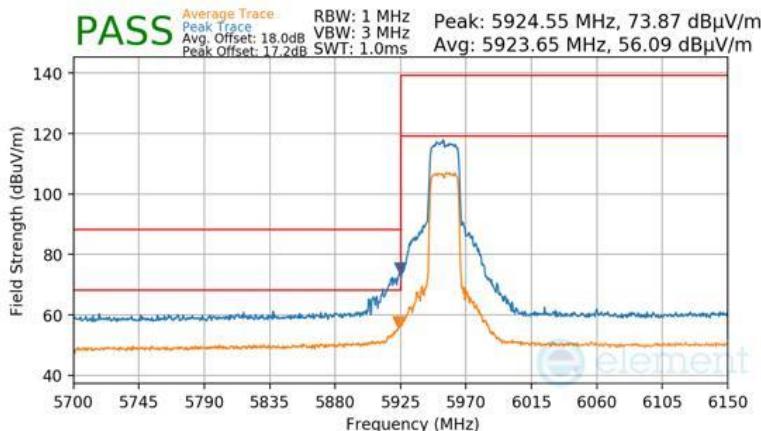

Plot 7-362 Antenna WF7a Radiated Lower Band Edge (Peak & Average – UNII Band 5)


Mode	802.11ax-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6065MHz
Channel	23

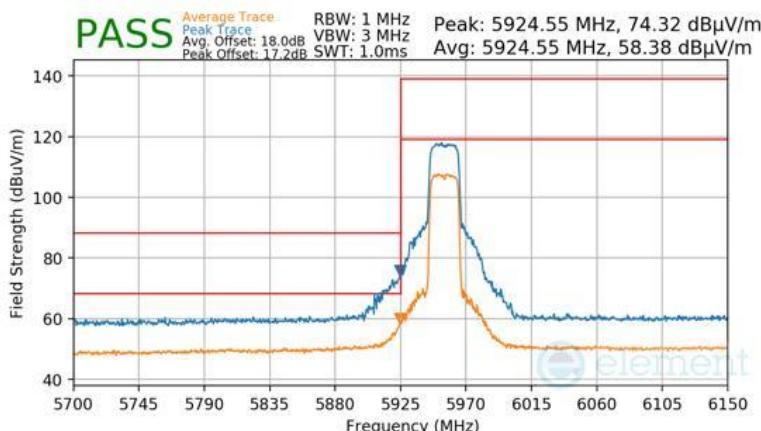

Plot 7-363 Antenna WF7a Radiated Lower Band Edge (Peak & Average – UNII Band 5)

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 168 of 188

Mode	802.11ax-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7025MHz
Channel	215

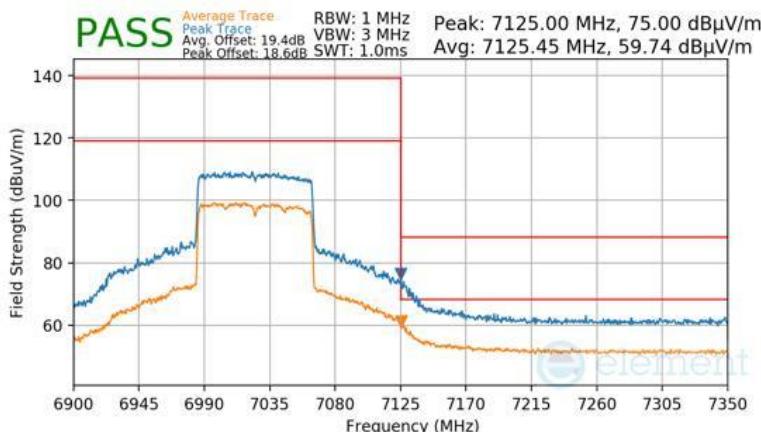


Plot 7-364 Antenna WF7a Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 169 of 188

7.7.9 Antenna WF7a Radiated Band Edge Measurements (160MHz BW)


§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Mode	802.11ax-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6025MHz
Channel	15

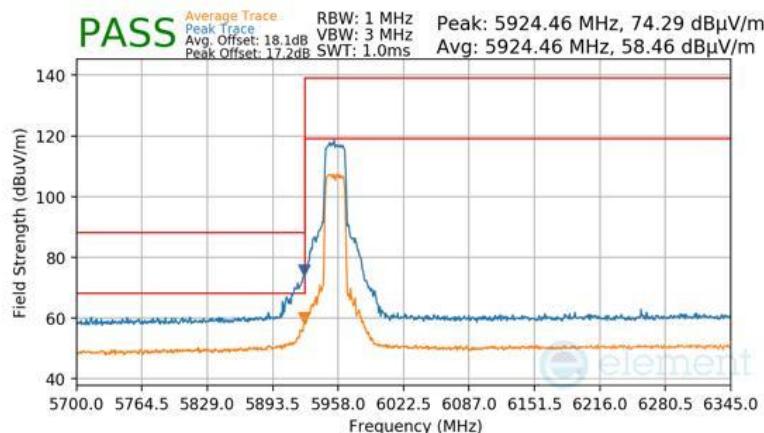

Plot 7-365 Antenna WF7a Radiated Lower Band Edge (Peak & Average – UNII Band 5)


Mode	802.11ax-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6185MHz
Channel	47

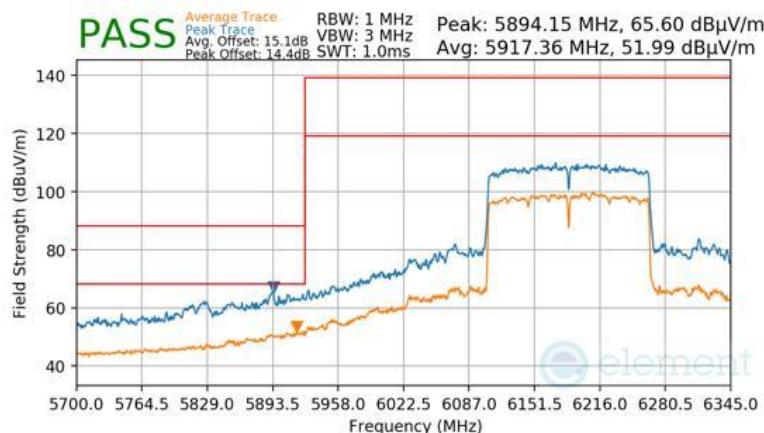

Plot 7-366 Antenna WF7a Radiated Lower Band Edge (Peak & Average – UNII Band 5)


FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 170 of 188

Mode 802.11ax-SU
Data Rate MCS11
Distance of Measurement 3 Meters
Operating Frequency 6825MHz
Channel 175

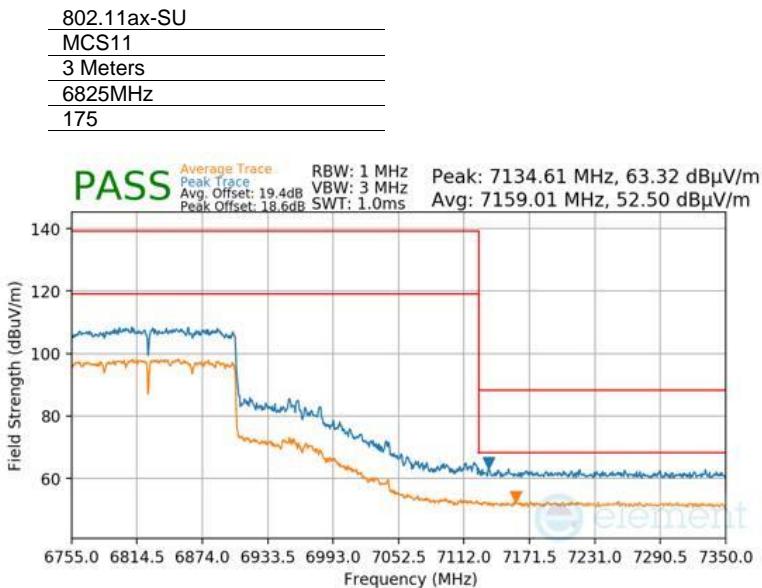

Plot 7-367 Antenna WF7a Radiated Upper Band Edge (Peak & Average – UNII Band 7)

Mode 802.11ax-SU
Data Rate MCS11
Distance of Measurement 3 Meters
Operating Frequency 6985MHz
Channel 207

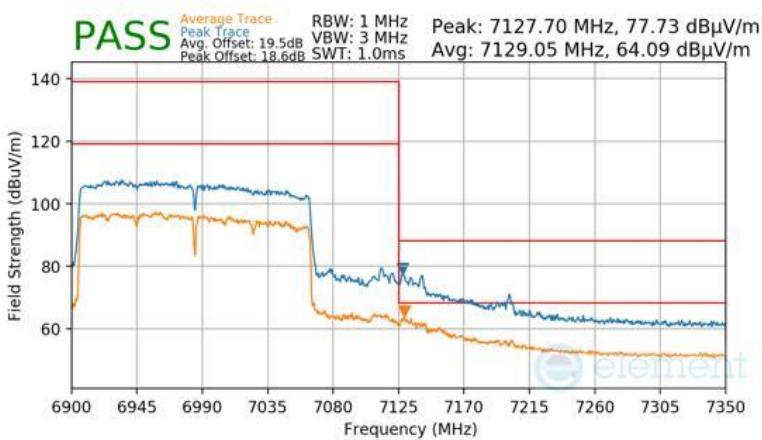


Plot 7-368 Antenna WF7a Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3266 IC: 579C-A3266	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 171 of 188

7.7.10 SDM Radiated Band Edge Measurements (20MHz BW)


§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]; RSS-Gen [8.9]

Mode	802.11ax-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	5955MHz
Channel	1

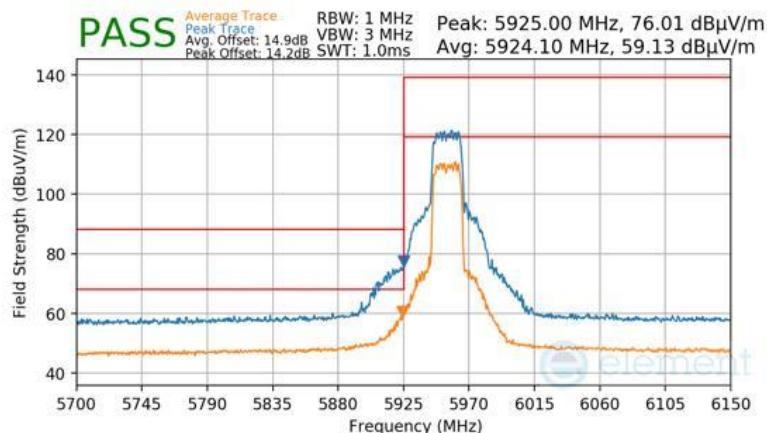

Plot 7-369 SDM Radiated Lower Band Edge (Peak & Average – UNII Band 5)


Mode	802.11ax-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7095MHz
Channel	229

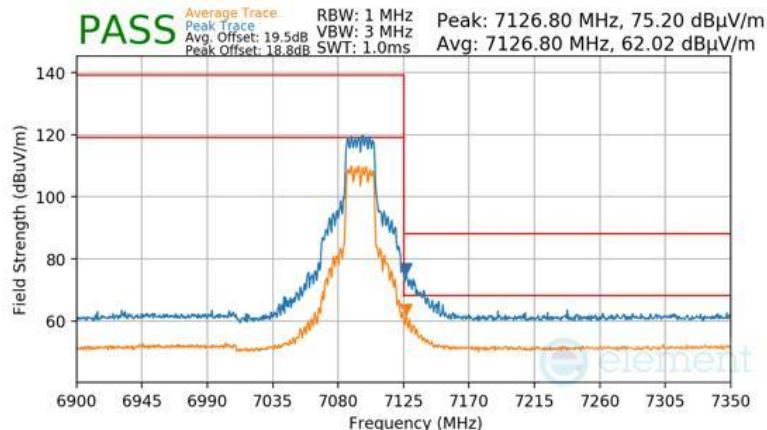


Plot 7-370 SDM Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 172 of 188

Mode 802.11ax-SU
Data Rate MCS11
Distance of Measurement 3 Meters
Operating Frequency 7115MHz
Channel 233

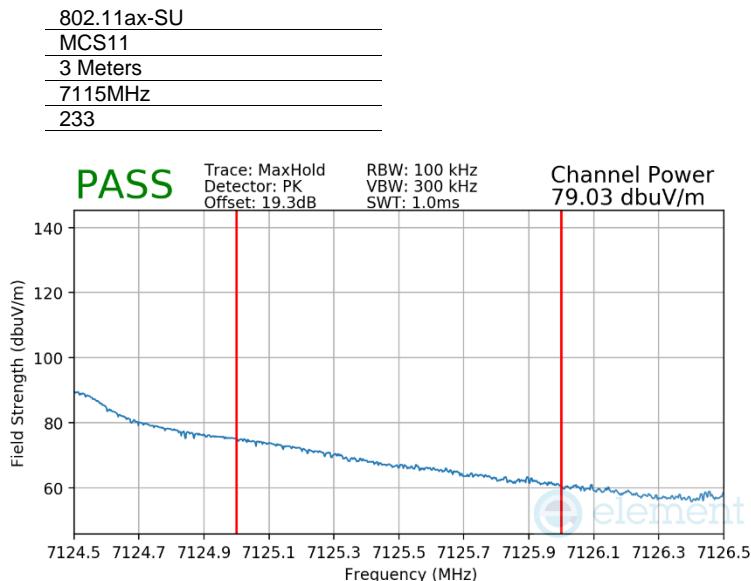

Plot 7-371 SDM Radiated Upper Band Edge (Peak – UNII Band 8)

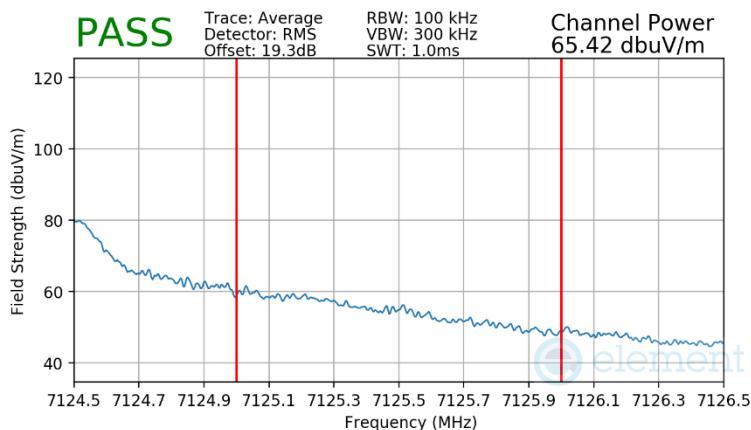


Plot 7-372 SDM Radiated Upper Band Edge (Average – UNII Band 8)

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 173 of 188

7.7.11 SDM Radiated Band Edge Measurements (40MHz BW)


§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Mode 802.11ax-SU
Data Rate MCS11
Distance of Measurement 3 Meters
Operating Frequency 5965MHz
Channel 3

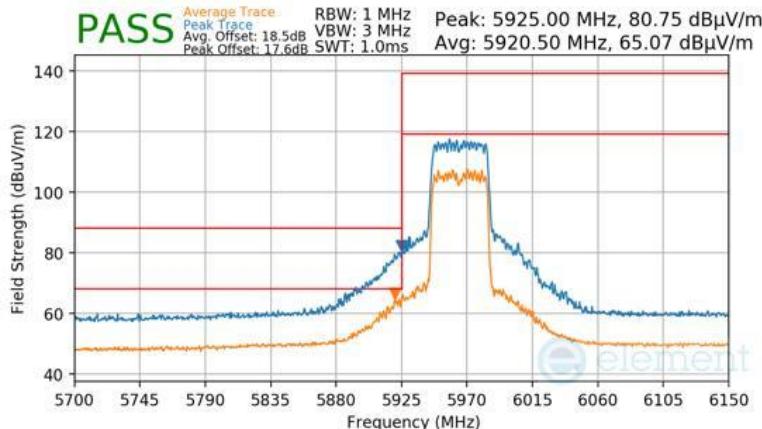

Plot 7-373 SDM Radiated Lower Band Edge (Peak & Average – UNII Band 5)


Mode 802.11ax-SU
Data Rate MCS11
Distance of Measurement 3 Meters
Operating Frequency 6005MHz
Channel 11

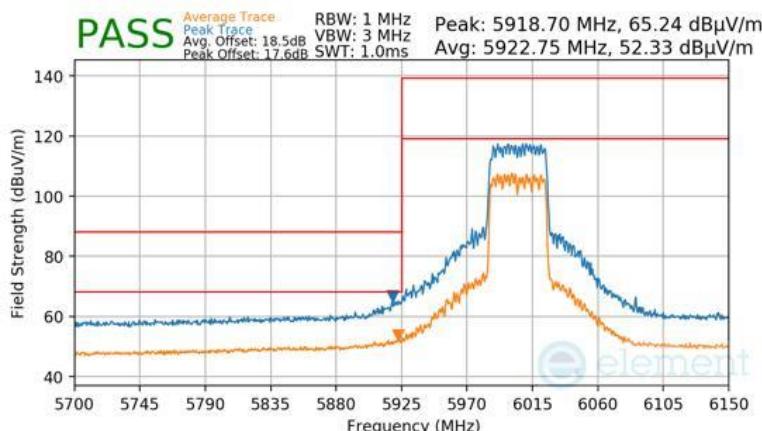

Plot 7-374 SDM Radiated Lower Band Edge (Peak & Average – UNII Band 5)

FCC ID: BCGA3266 IC: 579C-A3266	element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 174 of 188	

Mode	802.11ax-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7085MHz
Channel	227

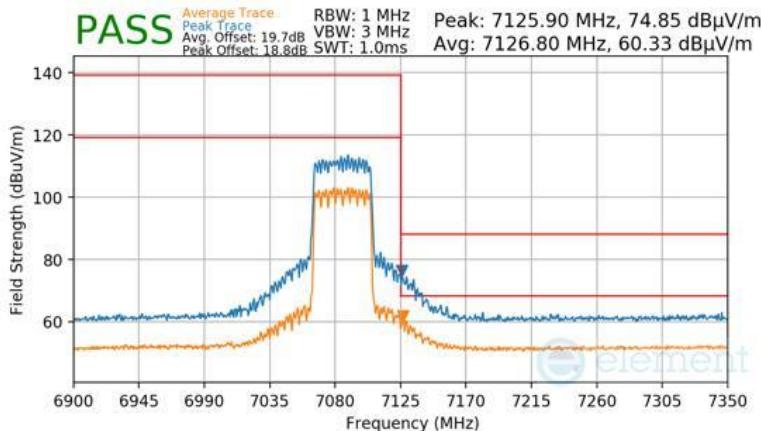


Plot 7-375 SDM Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 175 of 188

7.7.12 CDD/SDM Radiated Band Edge Measurements (80MHz BW)


§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Mode	802.11ax-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	5985MHz
Channel	7

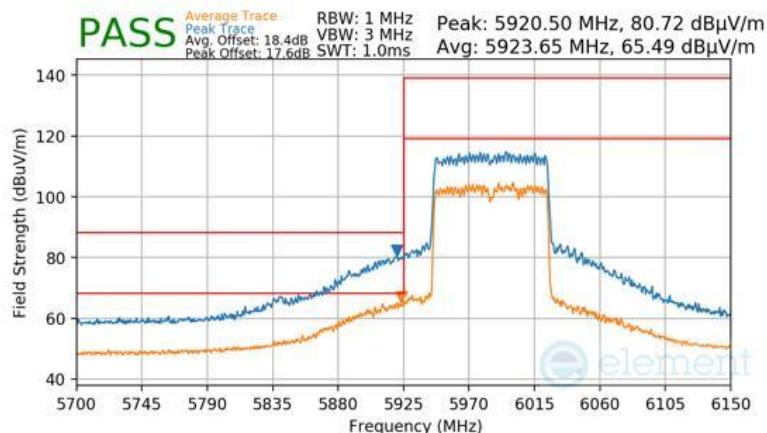

Plot 7-376 CDD Radiated Lower Band Edge (Peak & Average – UNII Band 5)


Mode	802.11ax-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6065MHz
Channel	23

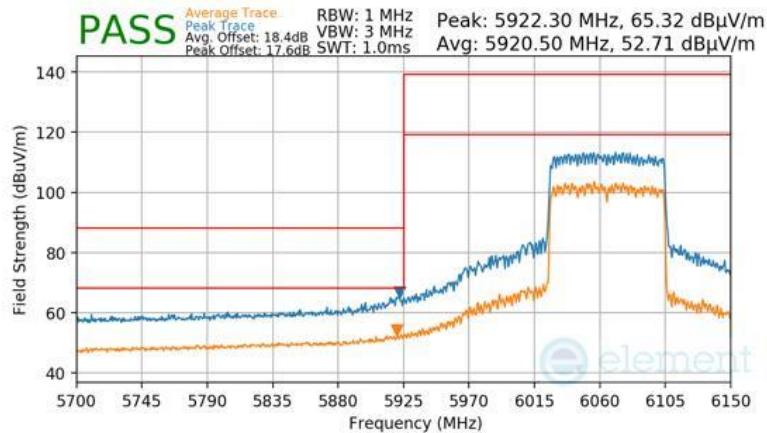

Plot 7-377 CDD Radiated Lower Band Edge (Peak & Average – UNII Band 5)

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 176 of 188

Mode	802.11ax-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7025MHz
Channel	215

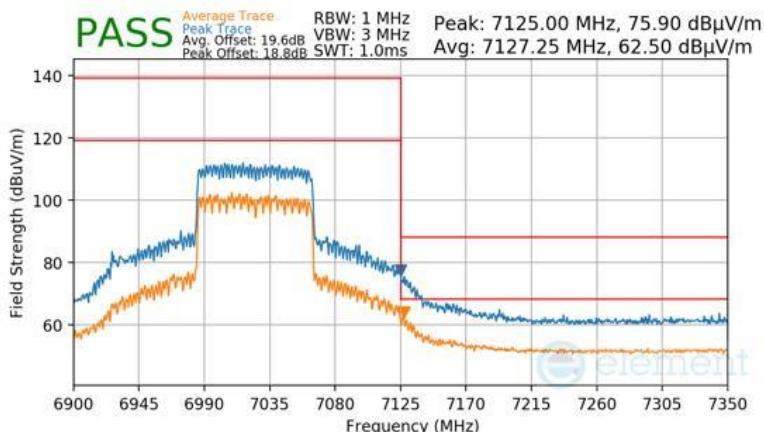


Plot 7-378 SDM Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 177 of 188


7.7.13 CDD/SDM Radiated Band Edge Measurements (160MHz BW)

Mode	802.11ax-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6025MHz
Channel	15

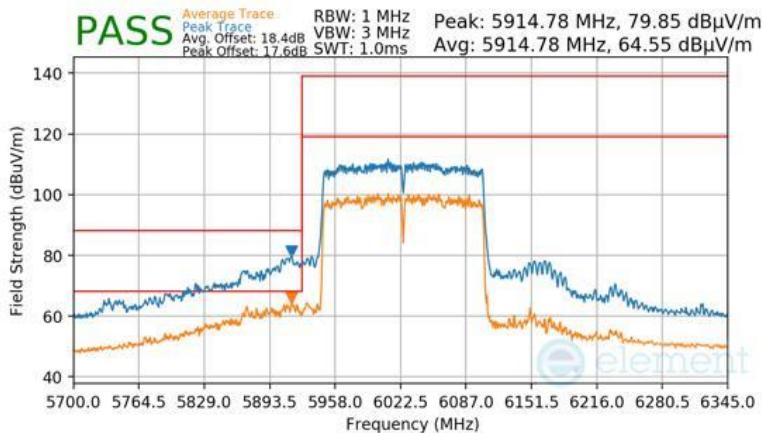

Plot 7-379 CDD Radiated Lower Band Edge (Peak & Average – UNII Band 5)


Mode	802.11ax-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6185MHz
Channel	47

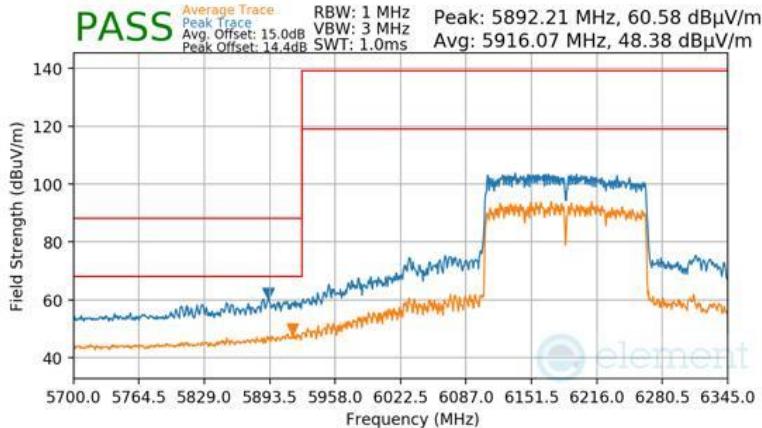

Plot 7-380 CDD Radiated Lower Band Edge (Peak & Average – UNII Band 5)


FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 178 of 188

Mode 802.11ax-SU
Data Rate MCS11
Distance of Measurement 3 Meters
Operating Frequency 6825MHz
Channel 175

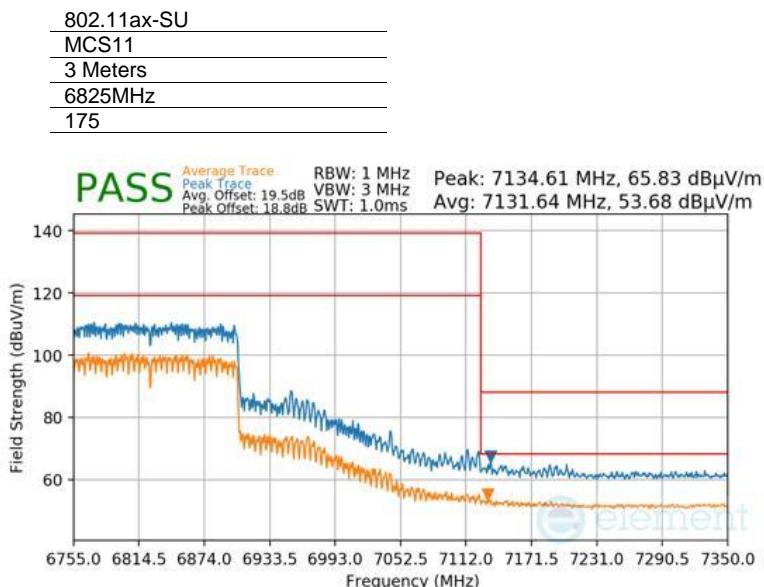

Plot 7-381 SDM Radiated Upper Band Edge (Peak & Average – UNII Band 7)

Mode 802.11ax-SU
Data Rate MCS11
Distance of Measurement 3 Meters
Operating Frequency 6985MHz
Channel 207

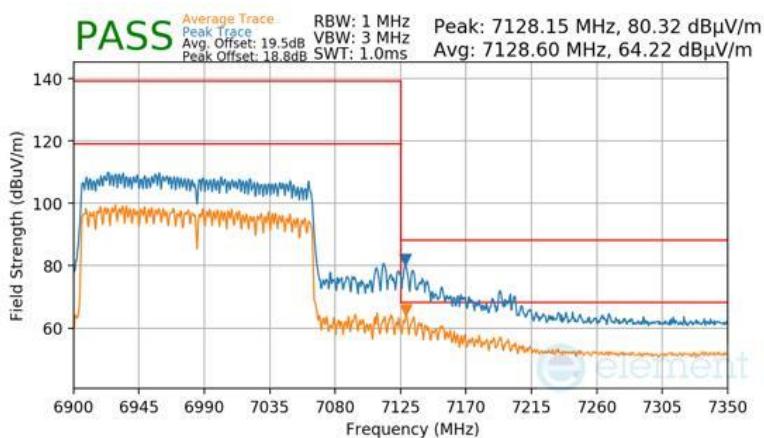

Plot 7-382 SDM Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3266	 element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 179 of 188	

7.8 Radiated Spurious Emissions – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-58 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μ V/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-58. Radiated Limits

Test Procedures Used

ANSI C63.10-2020

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = quasi-peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 180 of 188

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

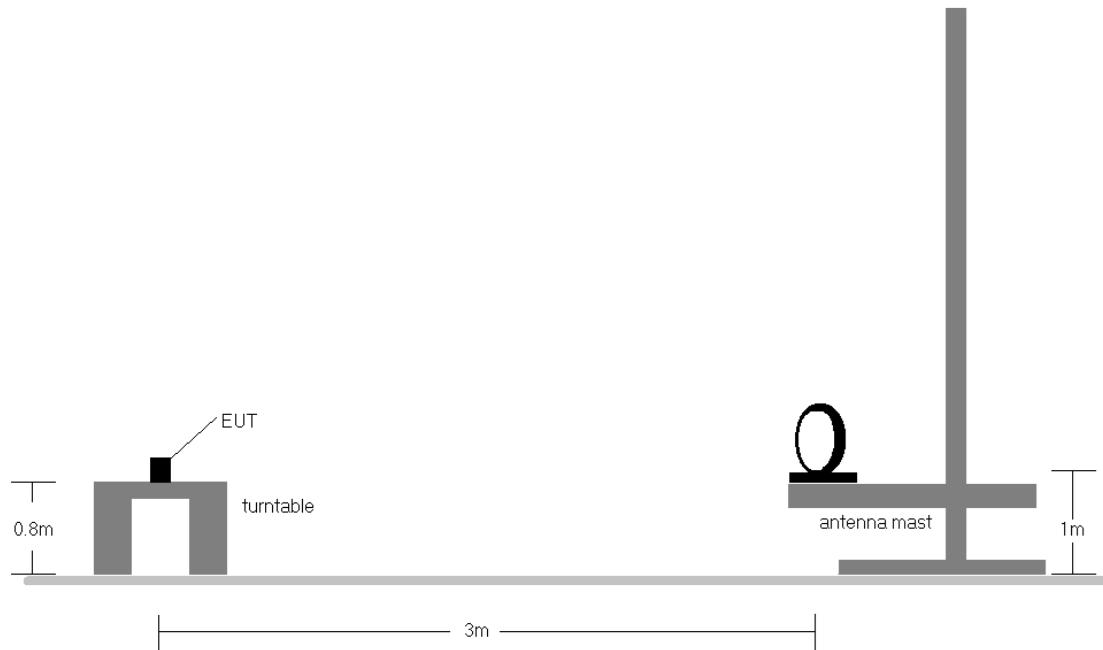


Figure 7-7. Radiated Test Setup < 30MHz

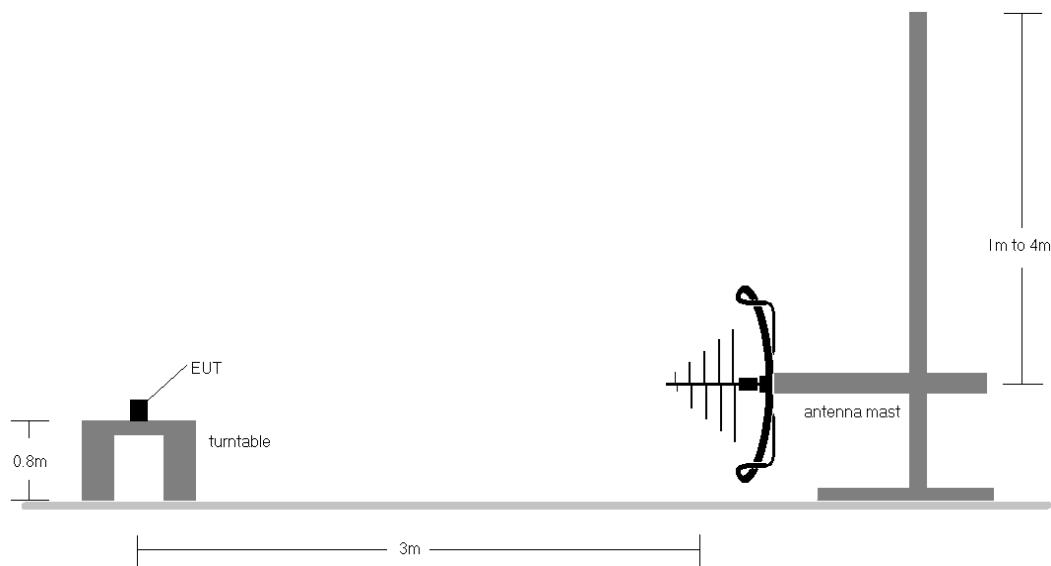


Figure 7-8. Radiated Test Setup < 1GHz

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 181 of 188

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-58.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector on emissions that were within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
10. All antenna configurations were investigated and only the worst case is reported.
11. The unit was tested with all possible modes and only the highest emission is reported.


Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level $[\text{dB}_{\mu\text{V/m}}]$ = Analyzer Level $[\text{dBm}]$ + 107 + AFCL $[\text{dB}/\text{m}]$
- AFCL $[\text{dB}/\text{m}]$ = Antenna Factor $[\text{dB}/\text{m}]$ + Cable Loss $[\text{dB}]$ - Preamp Gain $[\text{dB}]$
- Margin $[\text{dB}]$ = Field Strength Level $[\text{dB}_{\mu\text{V/m}}]$ - Limit $[\text{dB}_{\mu\text{V/m}}]$

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 182 of 188

7.8.1 CDD Radiated Spurious Emissions Measurements (Below 1GHz)

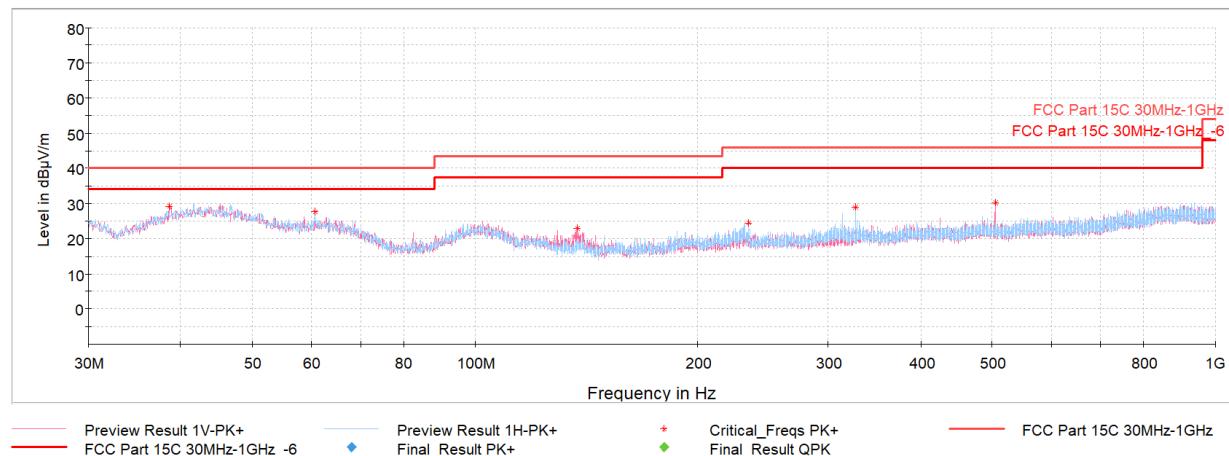

Plot 7-383. Radiated Spurious Emissions below 1GHz CDD, 802.11ax, Ch.45 with host PC via USB-C cable with wire charger

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
38.63	Max Peak	V	100	189	-61.50	-16.28	29.22	40.00	-10.78
60.80	Max Peak	H	300	307	-63.42	-16.02	27.56	40.00	-12.44
137.38	Max Peak	V	100	309	-64.03	-20.04	22.93	43.52	-20.59
234.09	Max Peak	H	100	199	-67.74	-14.89	24.37	46.02	-21.65
326.68	Max Peak	H	100	170	-65.70	-12.41	28.89	46.02	-17.13
504.43	Max Peak	V	100	170	-68.11	-8.57	30.32	46.02	-15.70

Table 7-59. Radiated Spurious Emissions Measurement below 1GHz CDD, 802.11ax, Ch.45 with host PC via USB-C cable with wire charger

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 183 of 188

7.9 AC Line-Conducted Emissions Measurement

§15.407; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-60. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2020, Section 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 184 of 188

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


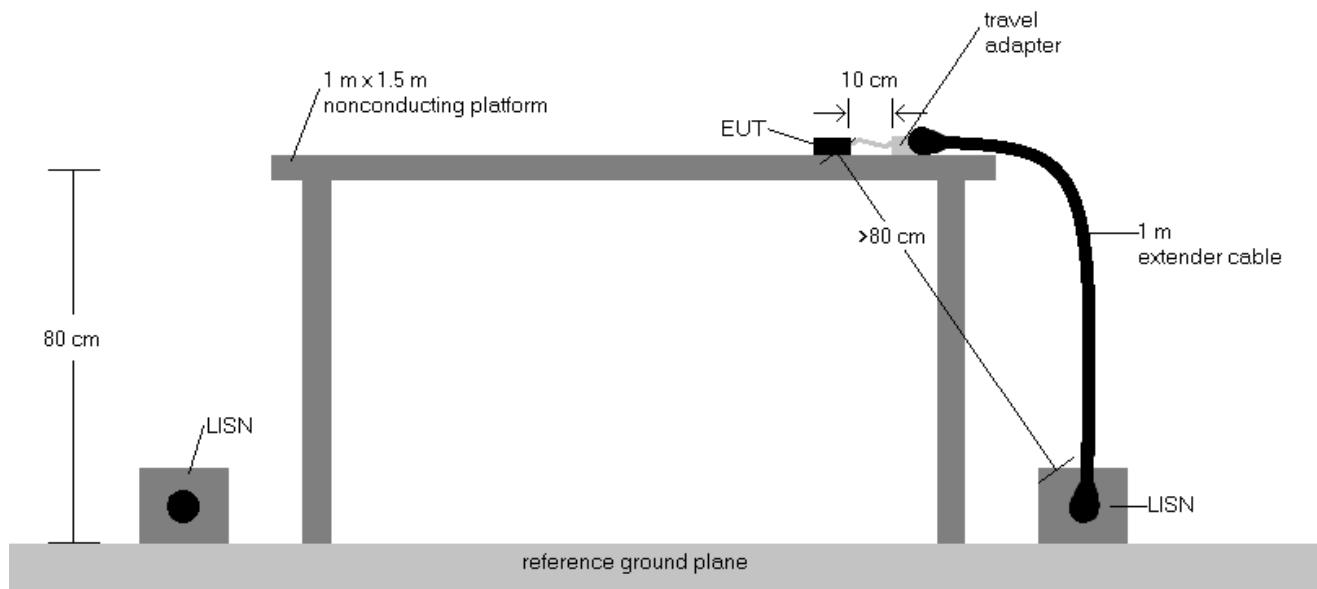


Figure 7-9. Test Instrument & Measurement Setup

Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
3. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207 and RSS-Gen (8.8).
4. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
5. QP/AV Level (dB μ V) = QP/AV Analyzer/Receiver Level (dB μ V) + Correction Factor (dB)
6. Margin (dB) = QP/AV Level (dB μ V) - QP/AV Limit (dB μ V)
7. Traces shown in plots are made using quasi-peak and average detectors.
8. Deviations to the Specifications: None.
9. The unit was tested with all possible modes and only the highest emission is reported.

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 185 of 188

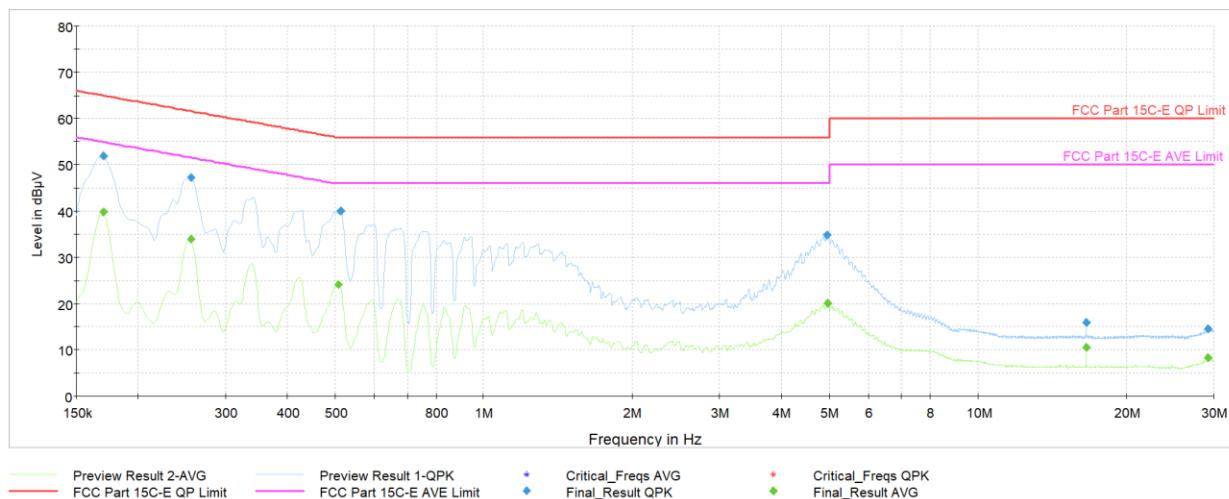


Plot 7-384. AC Line Conducted Plot with 802.11ax CDD – Ch. 45 (L1), with AC/DC adaptor via USB-C cable with wire charger

Frequency [MHz]	Process State	QuasiPeak [dB μ V]	Average [dB μ V]	Limit [dB μ V]	Margin [dB]	Line	PE
0.170	FINAL	—	39.83	54.95	-15.11	L1	GND
0.170	FINAL	51.9	—	64.95	-13.06	L1	GND
0.256	FINAL	—	33.93	51.57	-17.64	L1	GND
0.256	FINAL	47.3	—	61.57	-14.25	L1	GND
0.508	FINAL	—	24.13	46.00	-21.87	L1	GND
0.515	FINAL	39.9	—	56.00	-16.08	L1	GND
4.956	FINAL	34.9	—	56.00	-21.13	L1	GND
4.961	FINAL	—	20.02	46.00	-25.98	L1	GND
16.553	FINAL	15.9	—	60.00	-44.07	L1	GND
16.553	FINAL	—	10.55	50.00	-39.45	L1	GND
29.236	FINAL	—	8.33	50.00	-41.67	L1	GND
29.236	FINAL	14.5	—	60.00	-45.46	L1	GND

Table 7-61. AC Line Conducted Data with 802.11ax CDD – Ch. 45 (L1) with AC/DC adaptor via USB-C cable with wire charger

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device		Page 186 of 188

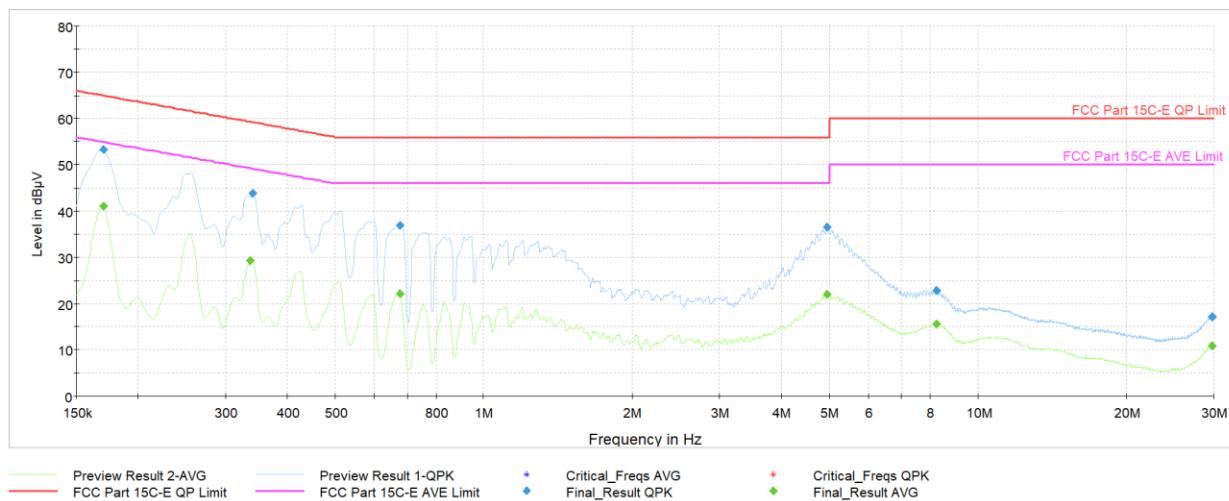

Plot 7-385. AC Line Conducted Plot with 802.11ax CDD – Ch. 45 (N), with AC/DC adaptor via USB-C cable with wire charger

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.170	FINAL	—	41.10	54.95	-13.85	N	GND
0.170	FINAL	53.3	—	64.95	-11.69	N	GND
0.337	FINAL	—	29.24	49.28	-20.05	N	GND
0.341	FINAL	43.8	—	59.17	-15.35	N	GND
0.677	FINAL	—	22.17	46.00	-23.83	N	GND
0.677	FINAL	36.9	—	56.00	-19.10	N	GND
4.956	FINAL	36.6	—	56.00	-19.39	N	GND
4.956	FINAL	—	22.04	46.00	-23.96	N	GND
8.257	FINAL	22.9	—	60.00	-37.12	N	GND
8.257	FINAL	—	15.61	50.00	-34.39	N	GND
29.726	FINAL	—	10.89	50.00	-39.11	N	GND
29.726	FINAL	17.1	—	60.00	-42.92	N	GND

Table 7-62. AC Line Conducted Data with 802.11ax CDD – Ch. 45 (N), with AC/DC adaptor via USB-C cable with wire charger

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device			Page 187 of 188

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device** **FCC ID: BCGA3266** and **IC: 579C-A3266** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules and RSS-248 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA3266 IC: 579C-A3266	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 188 of 188