



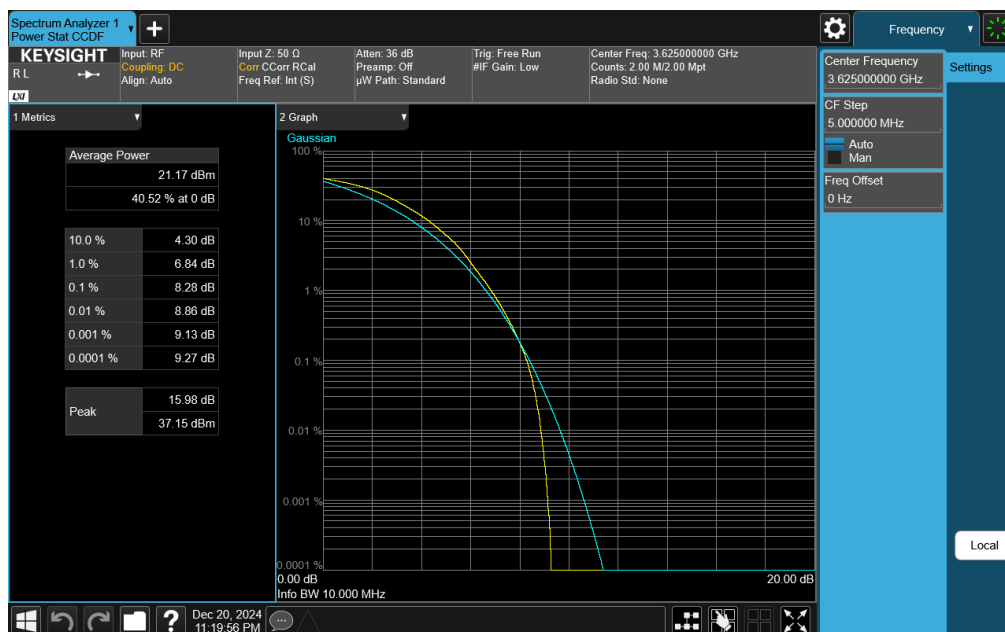

Plot 7-127. PAR Plot (LTE Band 48 - 10MHz 64-QAM – Full RB)

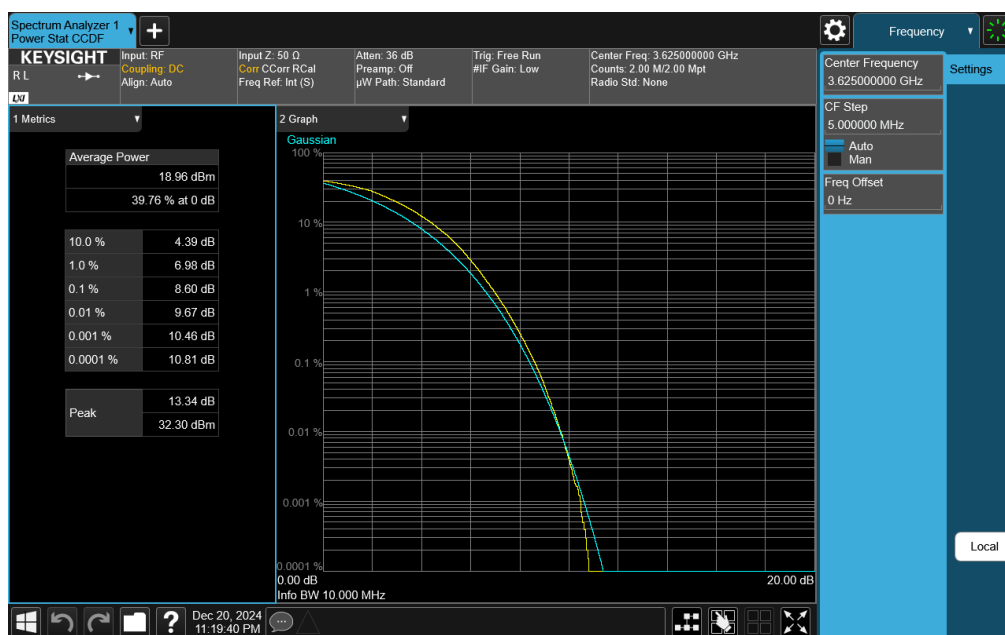


Plot 7-128. PAR Plot (LTE Band 48 - 10MHz 256-QAM – Full RB)


FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device
		Page 84 of 139

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

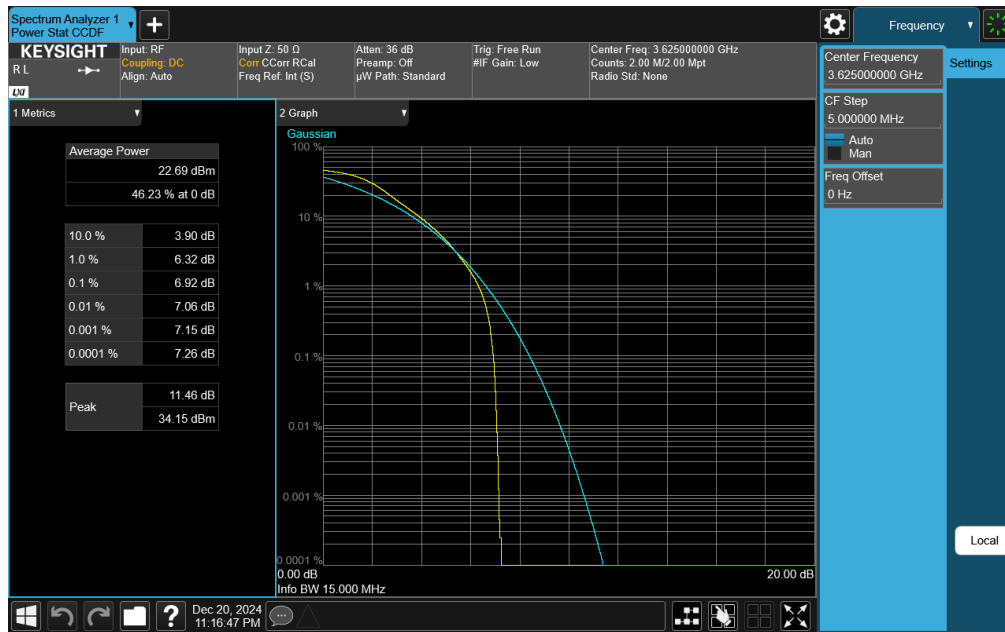

Plot 7-129. PAR Plot (LTE Band 48 - 15MHz QPSK – Full RB)

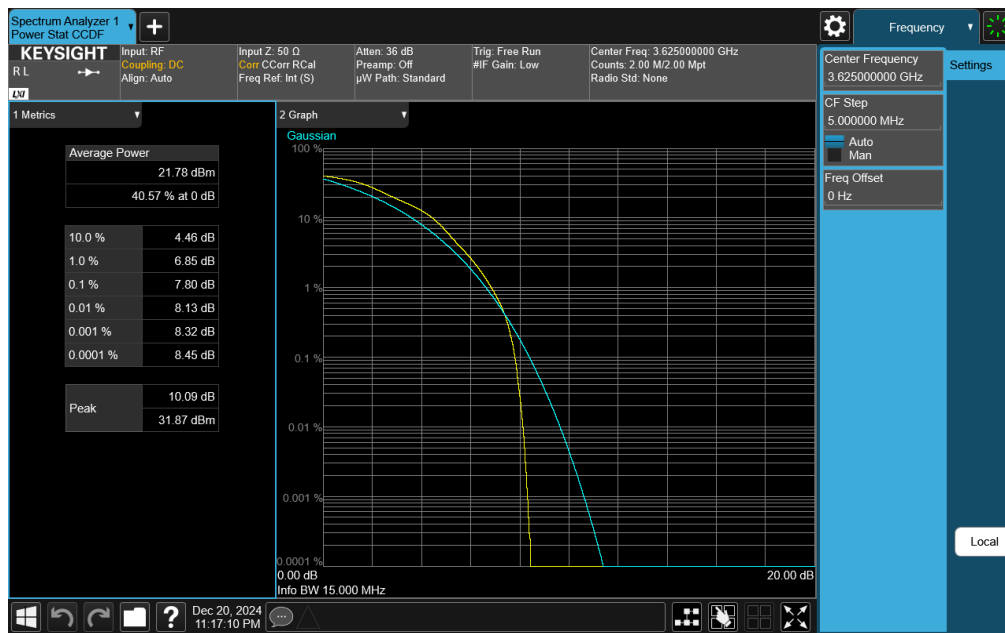


Plot 7-130. PAR Plot (LTE Band 48 - 15MHz 16-QAM – Full RB)


FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device
		Page 85 of 139

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

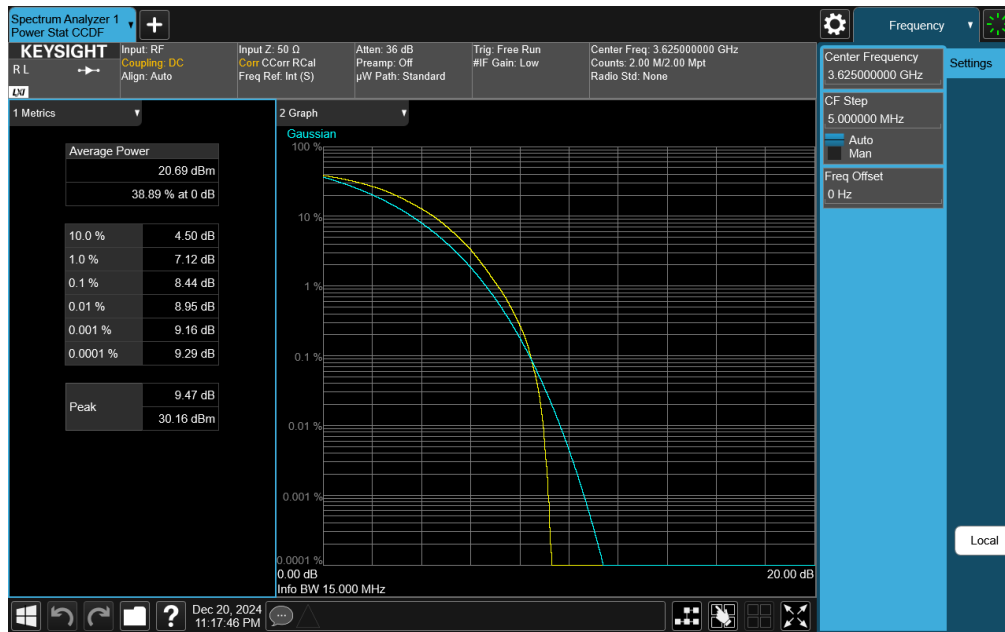

Plot 7-131. PAR Plot (LTE Band 48 - 15MHz 64-QAM - Full RB)

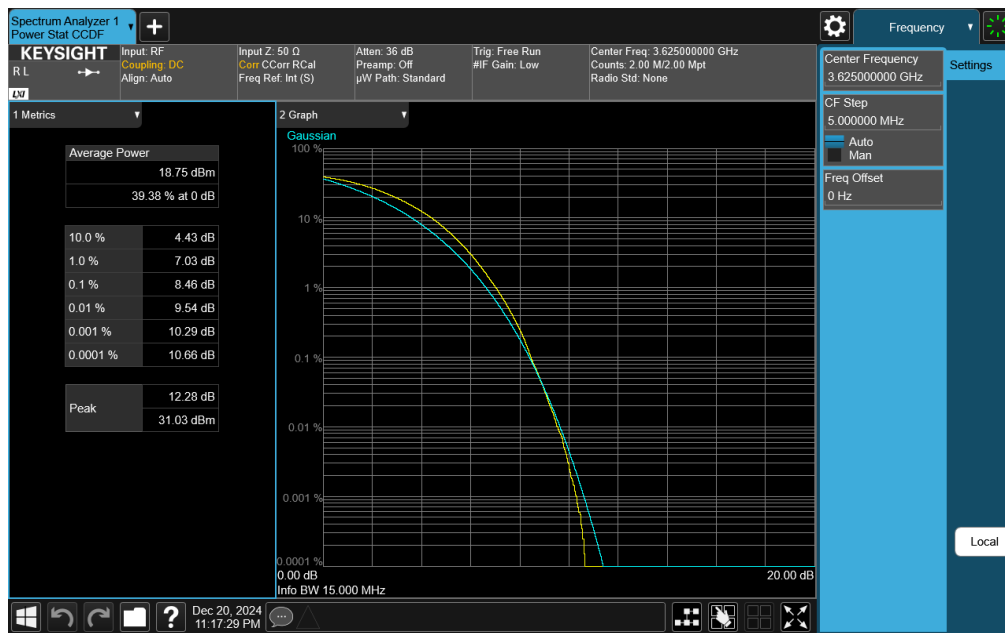


Plot 7-132. PAR Plot (LTE Band 48 - 15MHz 256-QAM - Full RB)


FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device
		Page 86 of 139

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

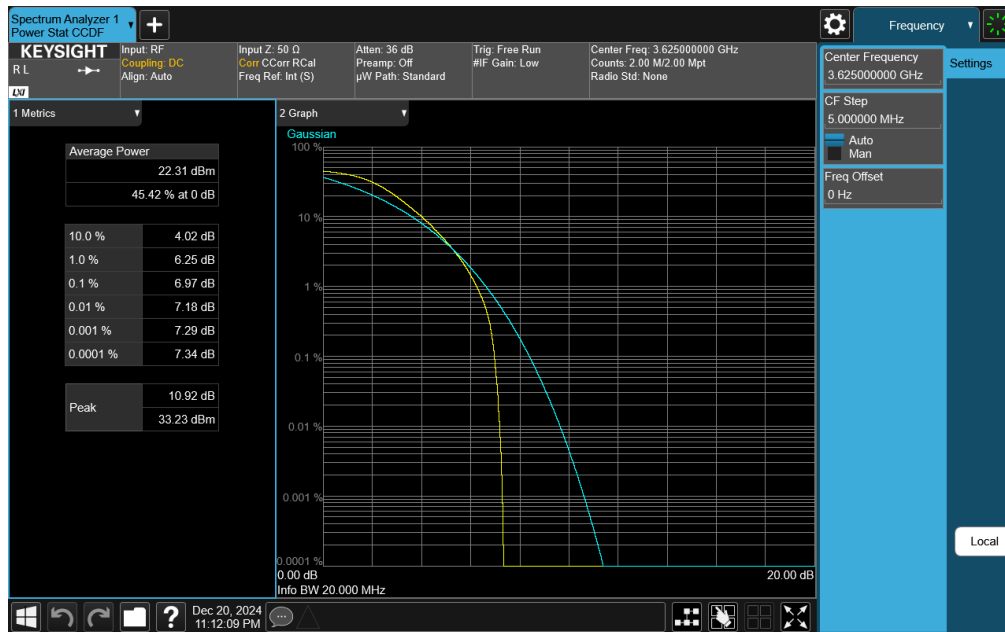

Plot 7-133. PAR Plot (LTE Band 48 - 20MHz QPSK – Full RB)

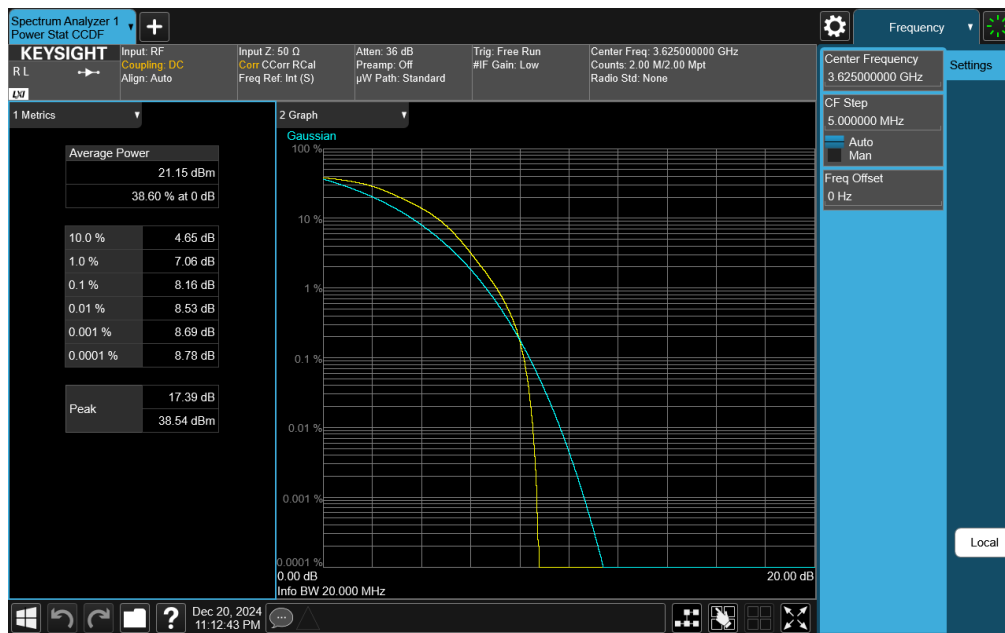


Plot 7-134. PAR Plot (LTE Band 48 - 20MHz 16-QAM – Full RB)


FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device
		Page 87 of 139

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

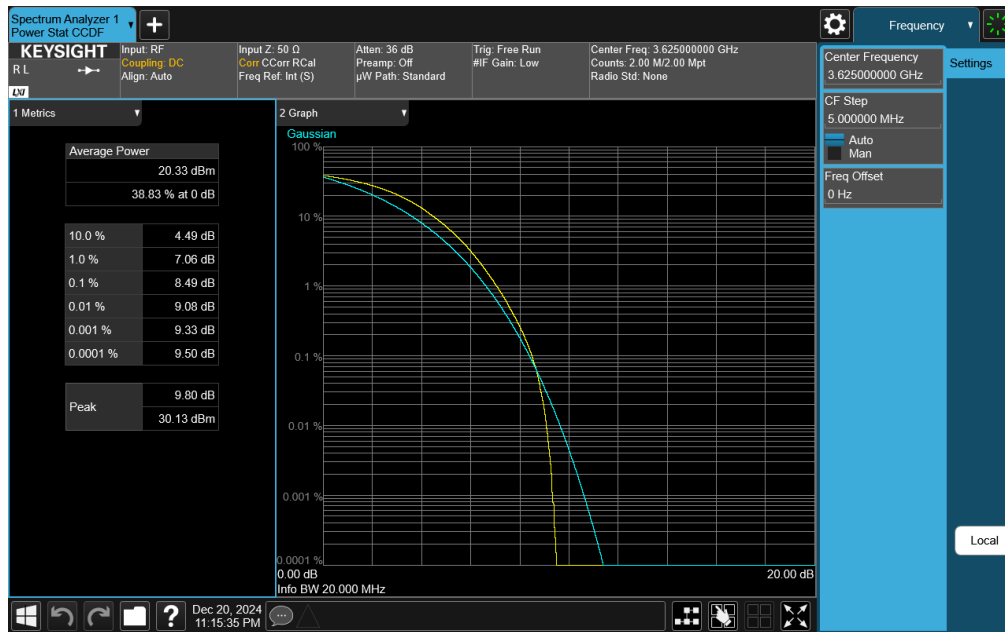

Plot 7-135. PAR Plot (LTE Band 48 - 20MHz 64-QAM – Full RB)

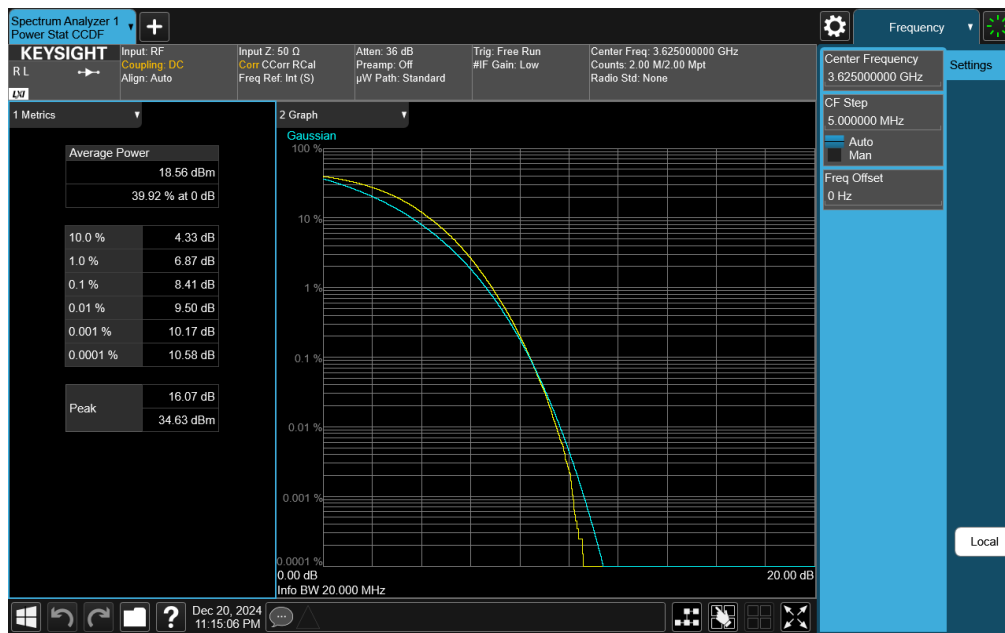


Plot 7-136. PAR Plot (LTE Band 48 - 20MHz 256-QAM – Full RB)

FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device
		Page 88 of 139


V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

NR Band n48

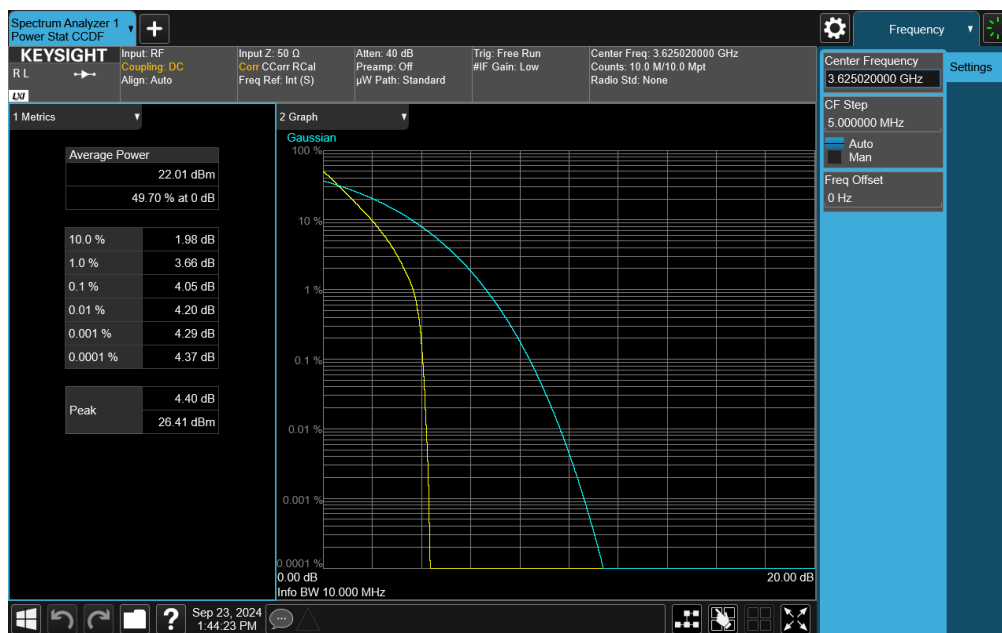

Plot 7-137. PAR Plot (NR Band n48 - 10MHz DFT-s-OFDM $\pi/2$ BPSK)

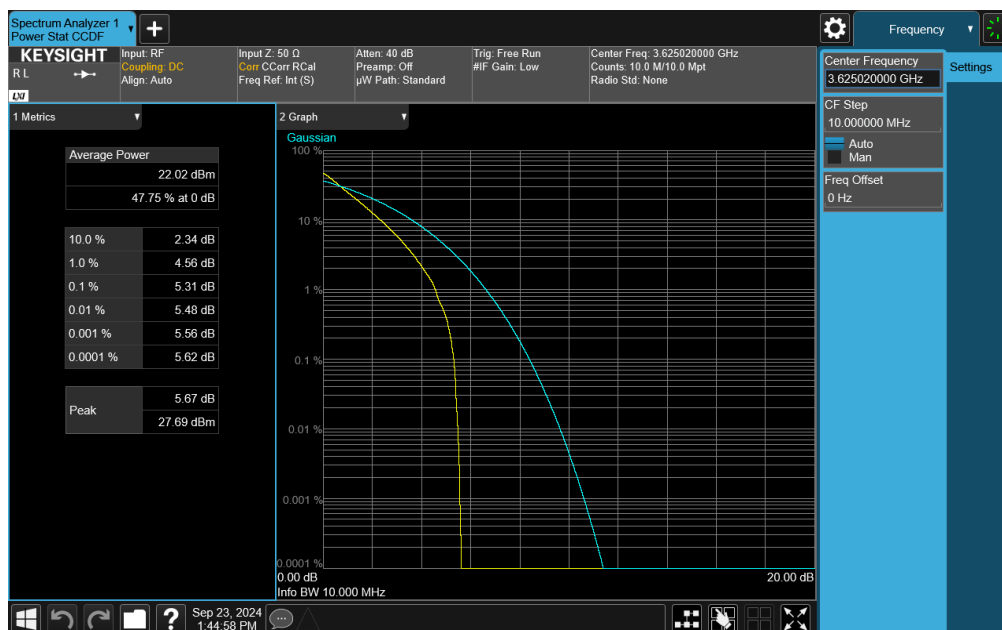


Plot 7-138. PAR Plot (NR Band n48 - 10MHz DFT-s-OFDM QPSK)


FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device
		Page 89 of 139

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

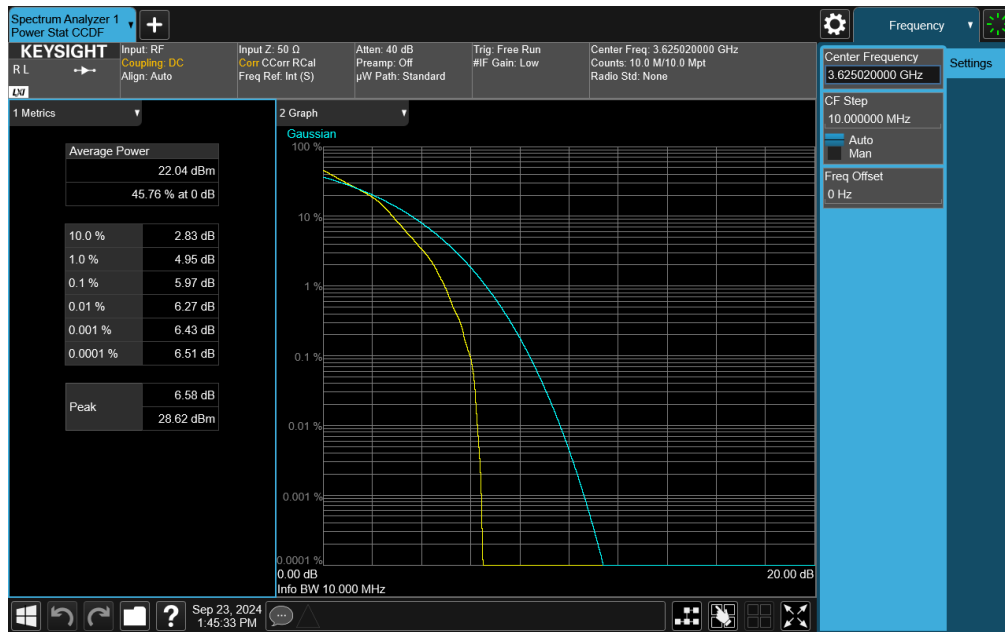

Plot 7-139. PAR Plot (NR Band n48 - 10MHz DFT-s-OFDM 16-QAM)

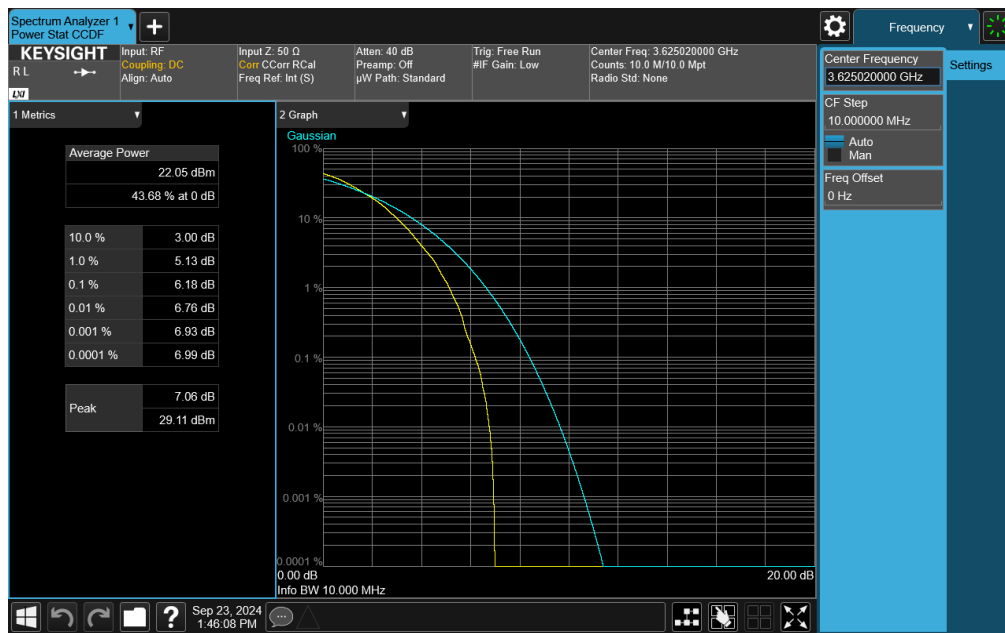


Plot 7-140. PAR Plot (NR Band n48 - 10MHz DFT-s-OFDM 64-QAM)


FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device
		Page 90 of 139

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

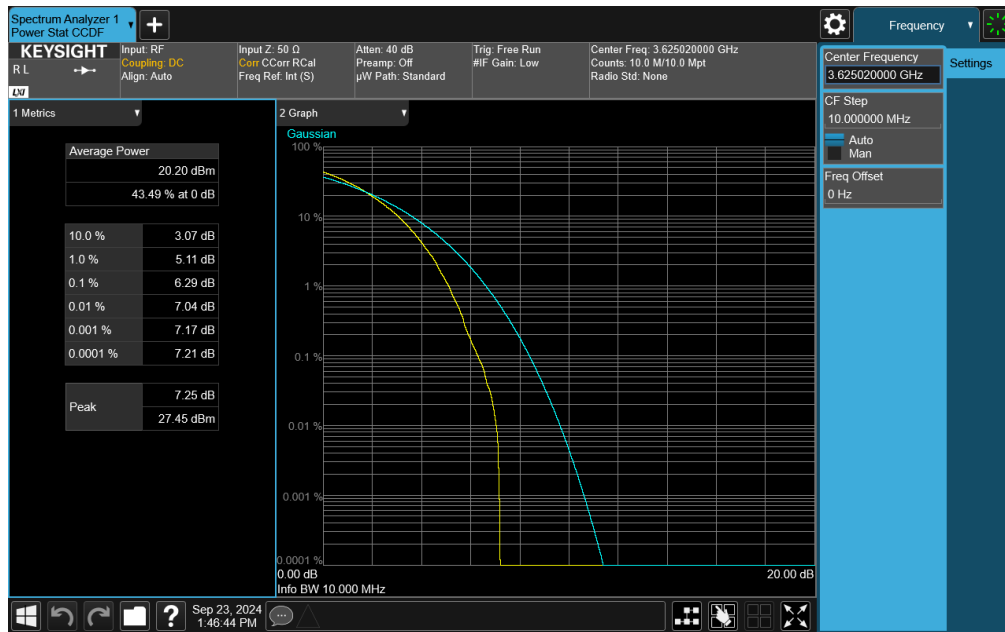

Plot 7-141. PAR Plot (NR Band n48 - 10MHz DFT-s-OFDM 256-QAM)

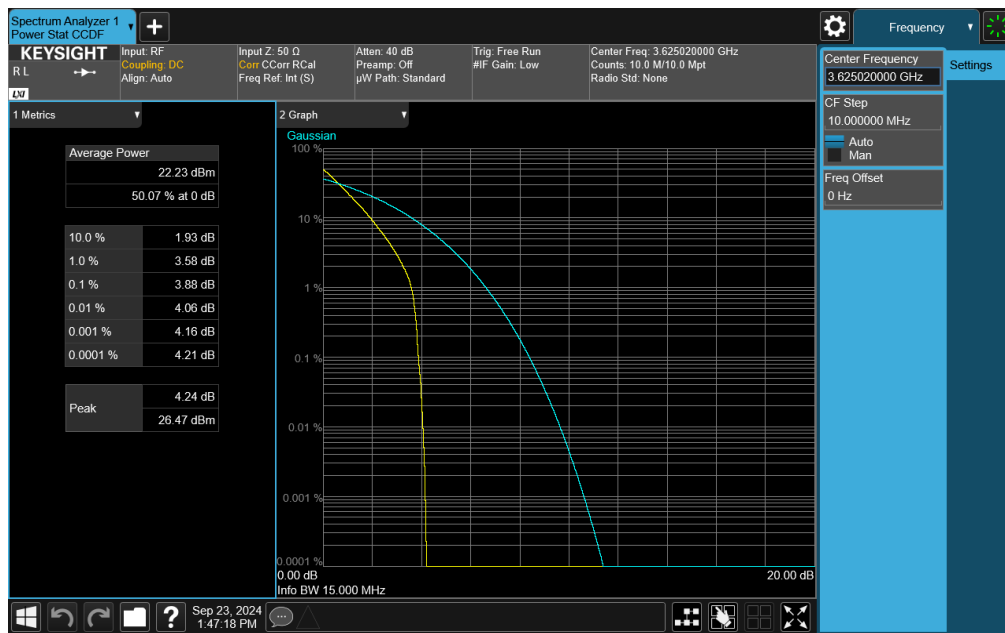


Plot 7-142. PAR Plot (NR Band n48 - 15MHz DFT-s-OFDM $\pi/2$ BPSK)


FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device
		Page 91 of 139

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

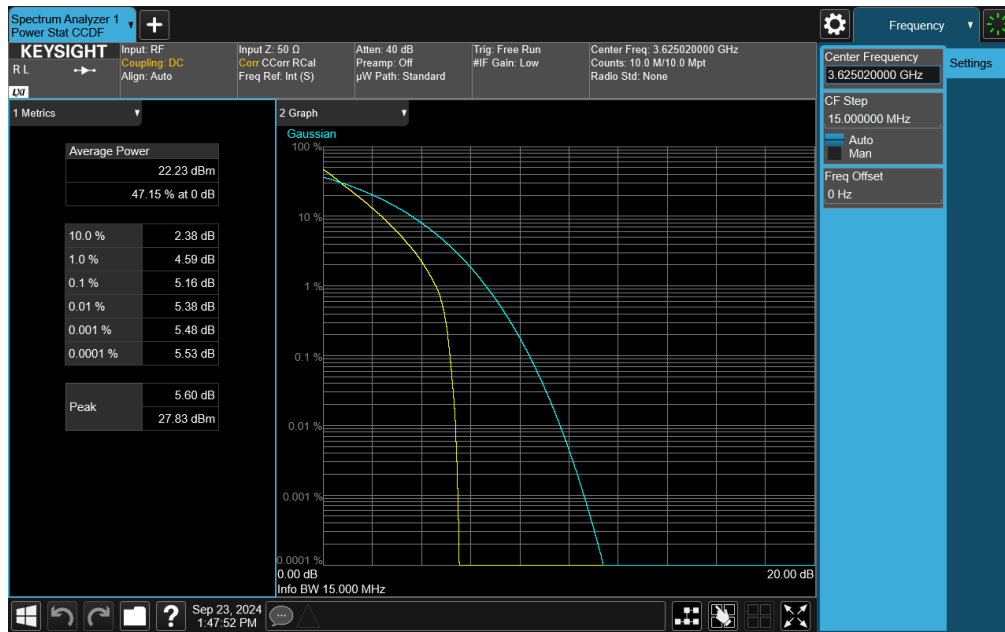

Plot 7-143. PAR Plot (NR Band n48 - 15MHz DFT-s-OFDM QPSK)

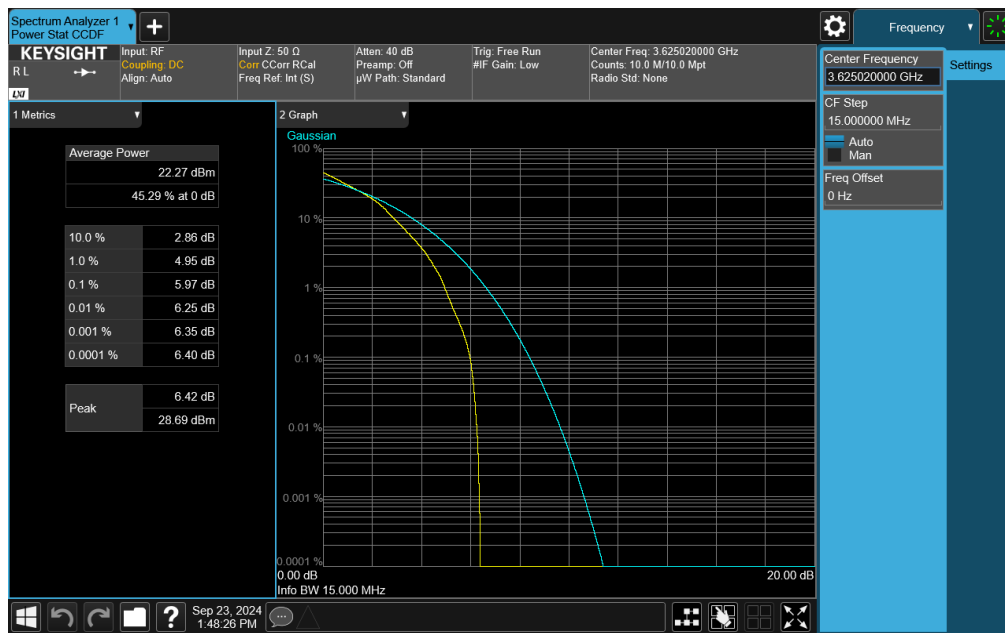


Plot 7-144. PAR Plot (NR Band n48 - 15MHz DFT-s-OFDM 16-QAM)


FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device
		Page 92 of 139

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

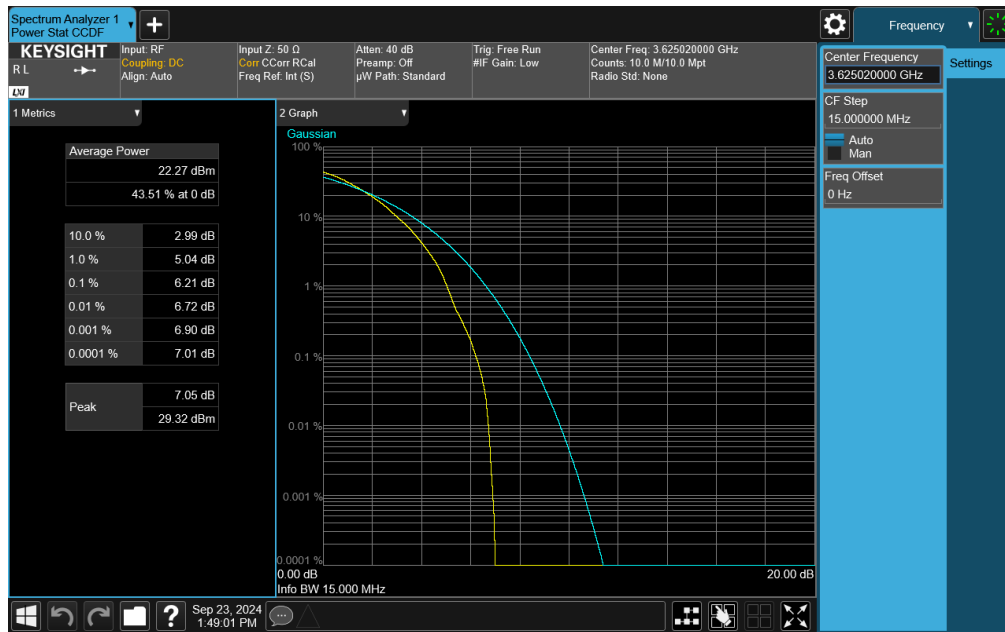

Plot 7-145. PAR Plot (NR Band n48 - 15MHz DFT-s-OFDM 64-QAM)


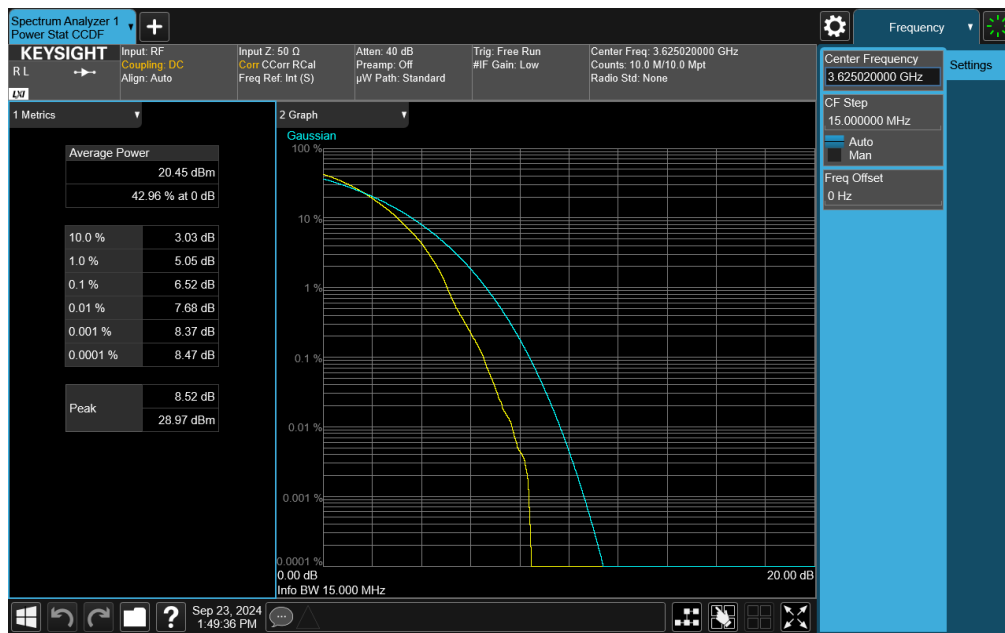


Plot 7-146. PAR Plot (NR Band n48 - 15MHz DFT-s-OFDM 256-QAM)

FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device
		Page 93 of 139

V2.2 09/07/2023


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

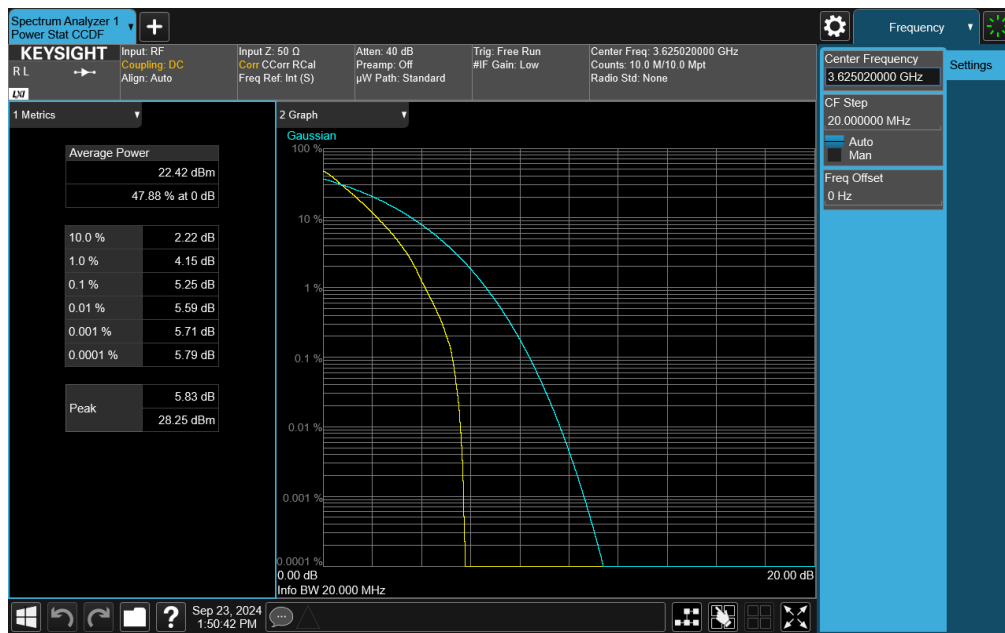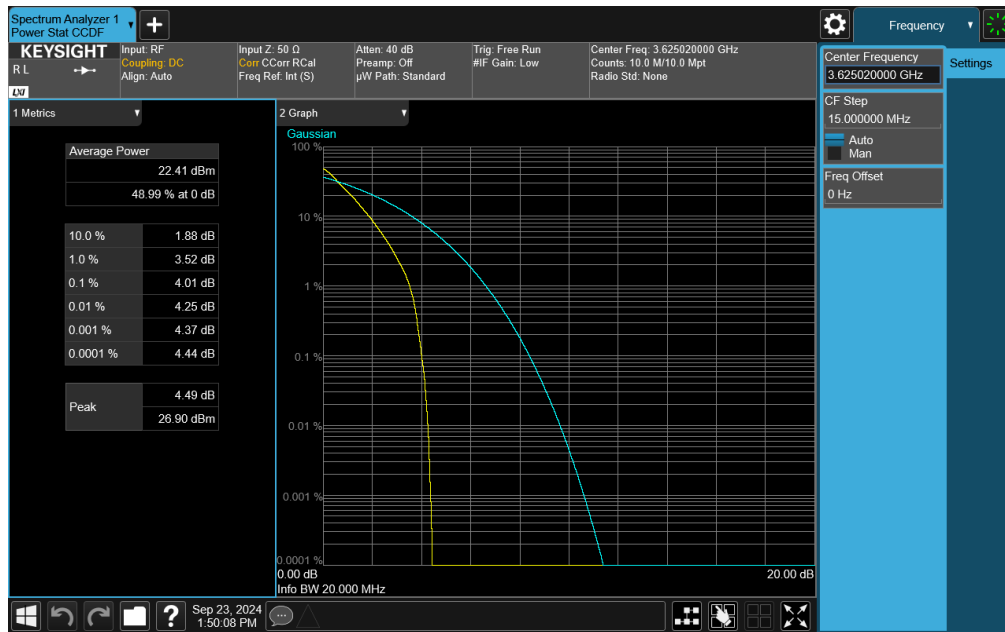


FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device
		Page 94 of 139

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

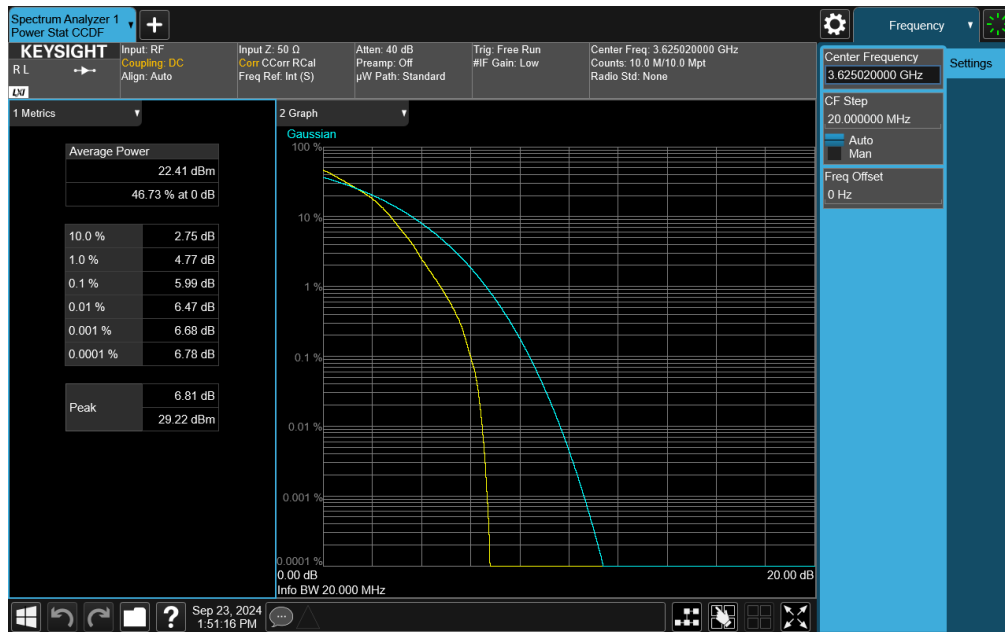

Plot 7-149. PAR Plot (NR Band n48 - 20MHz DFT-s-OFDM 16-QAM)

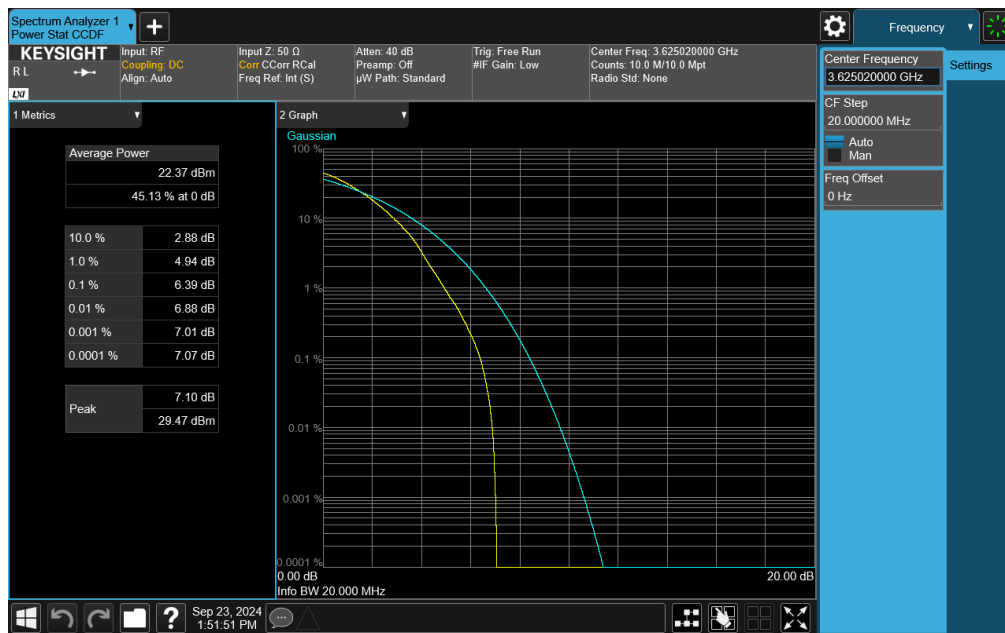


Plot 7-150. PAR Plot (NR Band n48 - 20MHz DFT-s-OFDM 64-QAM)


FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device
		Page 95 of 139

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

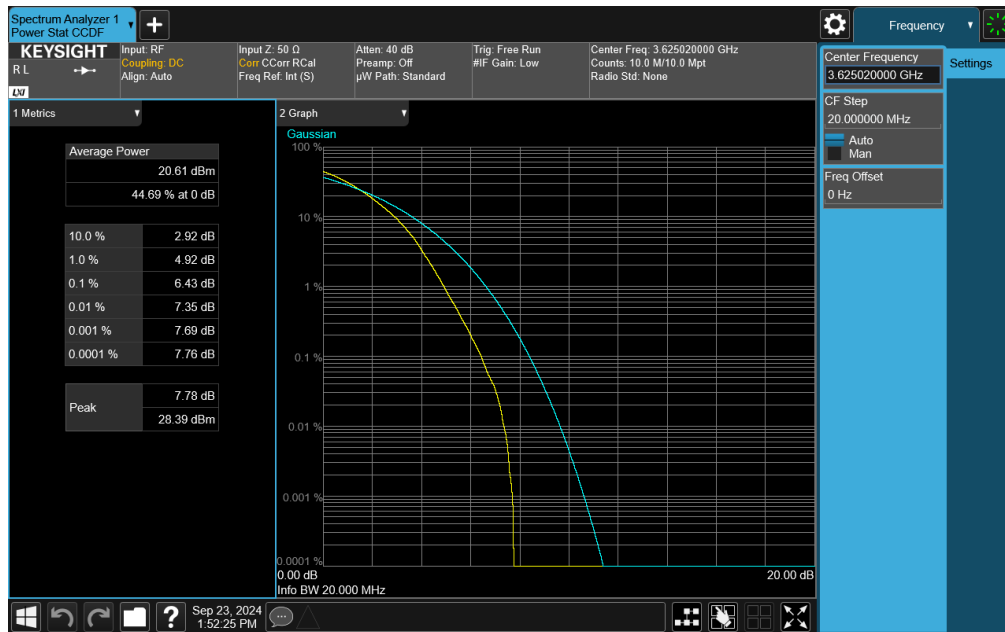

Plot 7-151. PAR Plot (NR Band n48 - 20MHz DFT-s-OFDM 256-QAM)

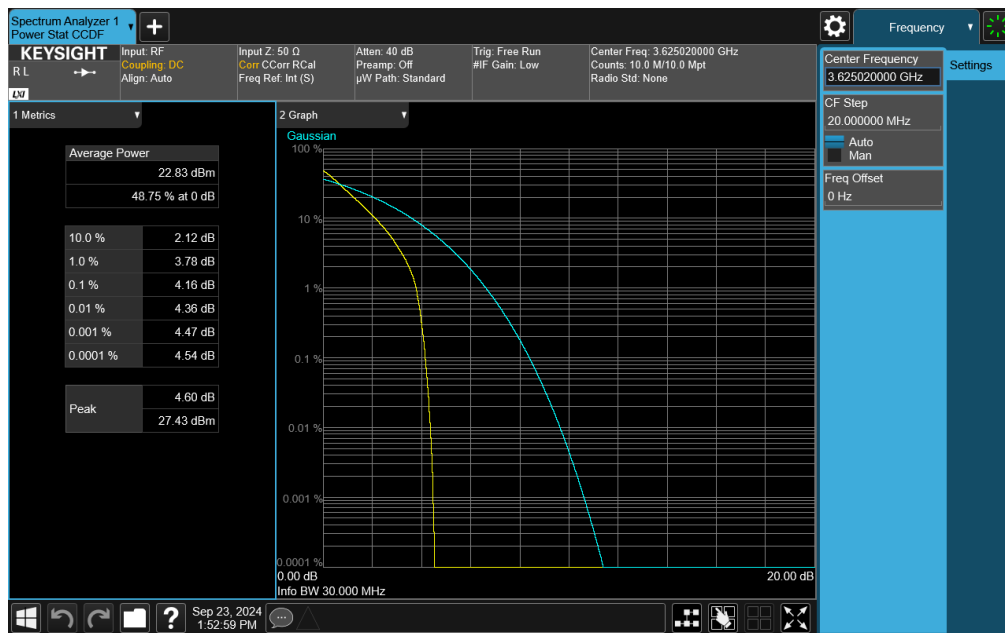


Plot 7-152. PAR Plot (NR Band n48 - 30MHz DFT-s-OFDM $\pi/2$ BPSK)


FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device
		Page 96 of 139

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

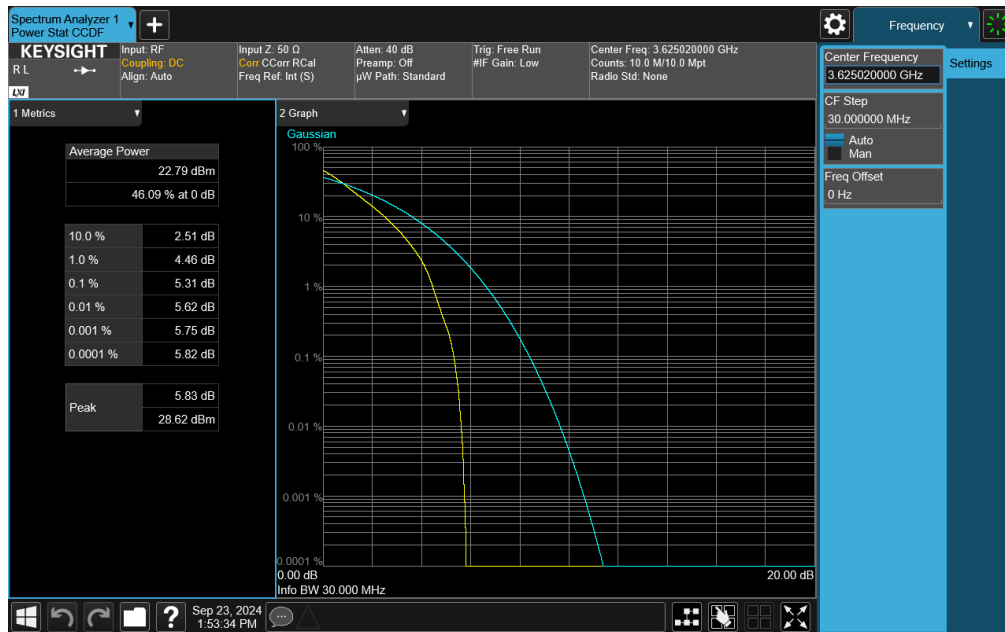

Plot 7-153. PAR Plot (NR Band n48 - 30MHz DFT-s-OFDM QPSK)

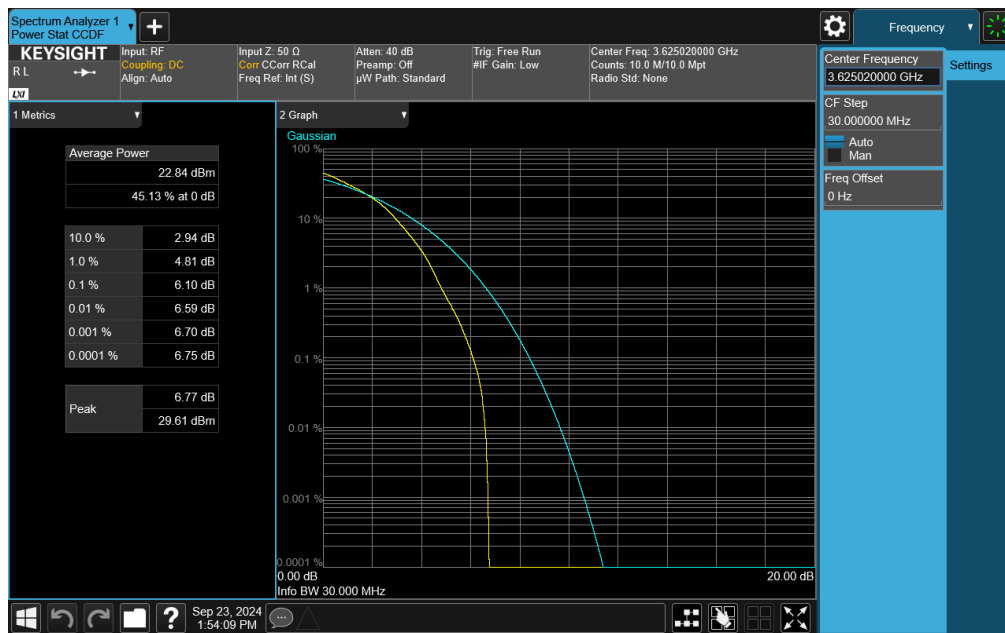


Plot 7-154. PAR Plot (NR Band n48 - 30MHz DFT-s-OFDM 16-QAM)


FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device
		Page 97 of 139

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

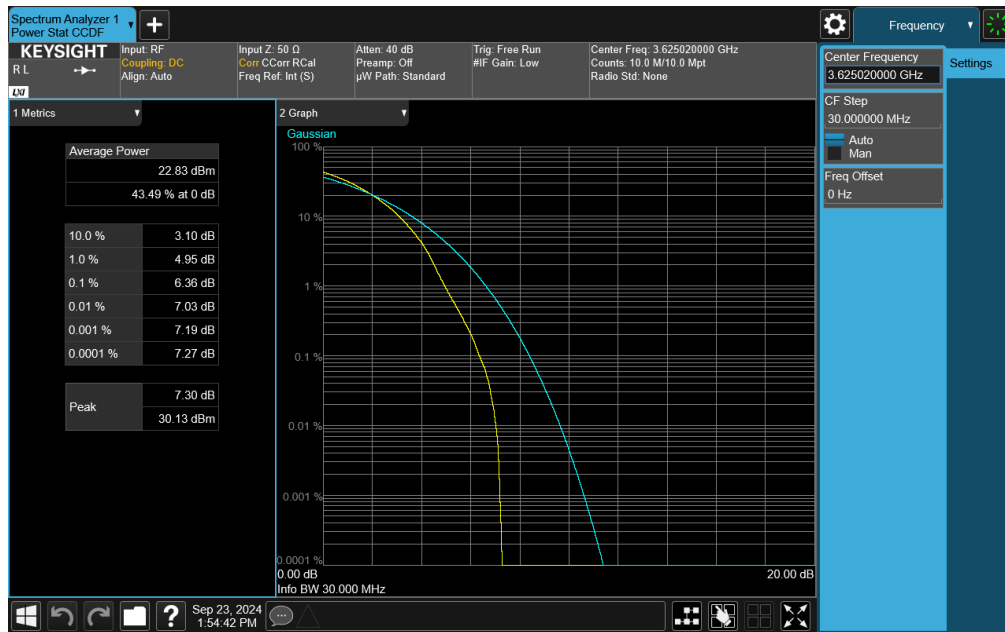

Plot 7-155. PAR Plot (NR Band n48 - 30MHz DFT-s-OFDM 64-QAM)

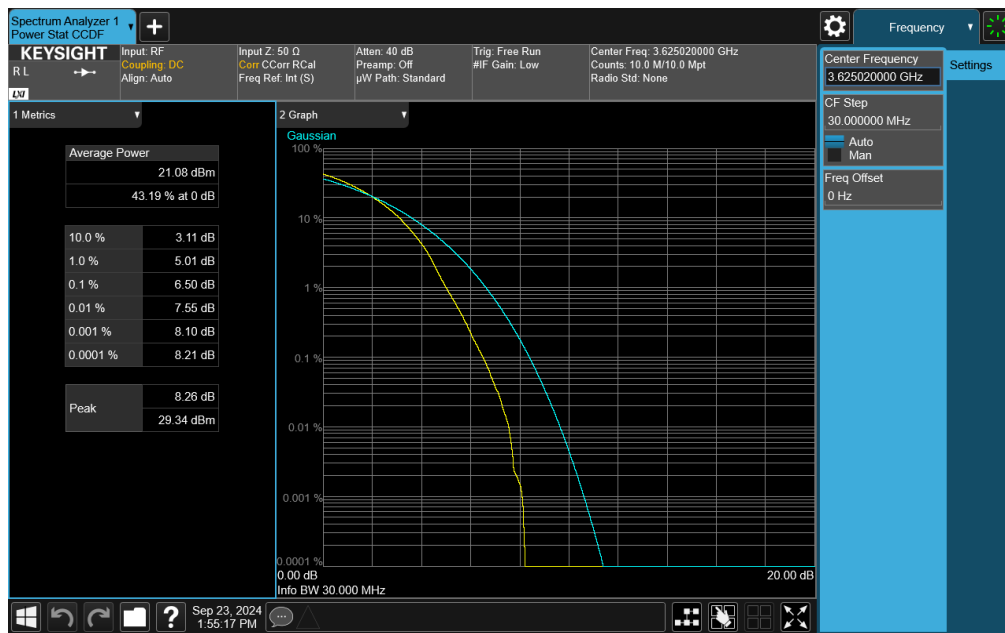


Plot 7-156. PAR Plot (NR Band n48 - 30MHz DFT-s-OFDM 256-QAM)


FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device
		Page 98 of 139

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

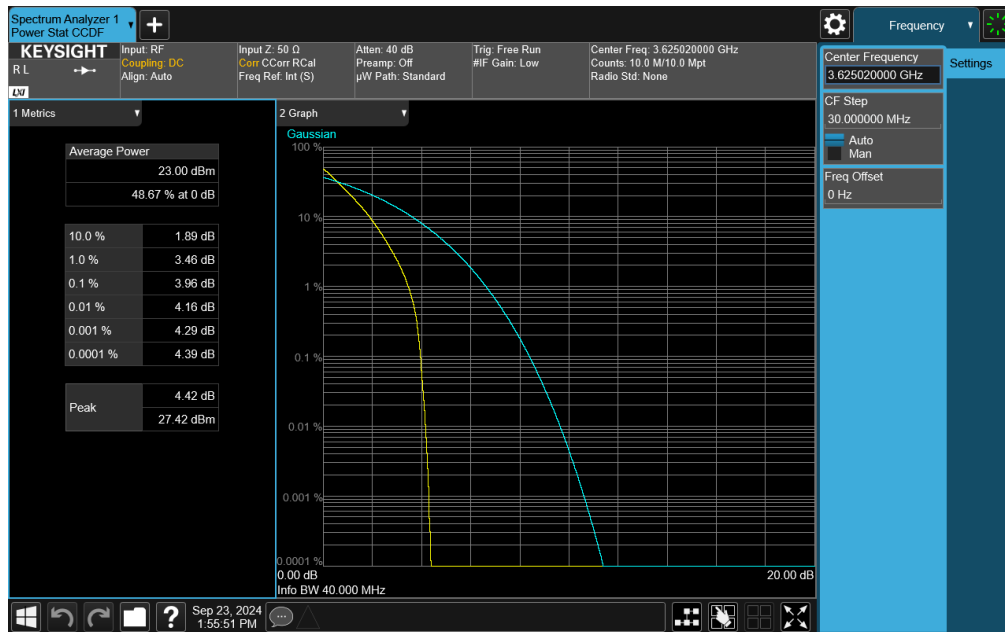

Plot 7-157. PAR Plot (NR Band n48 - 40MHz DFT-s-OFDM $\pi/2$ BPSK)

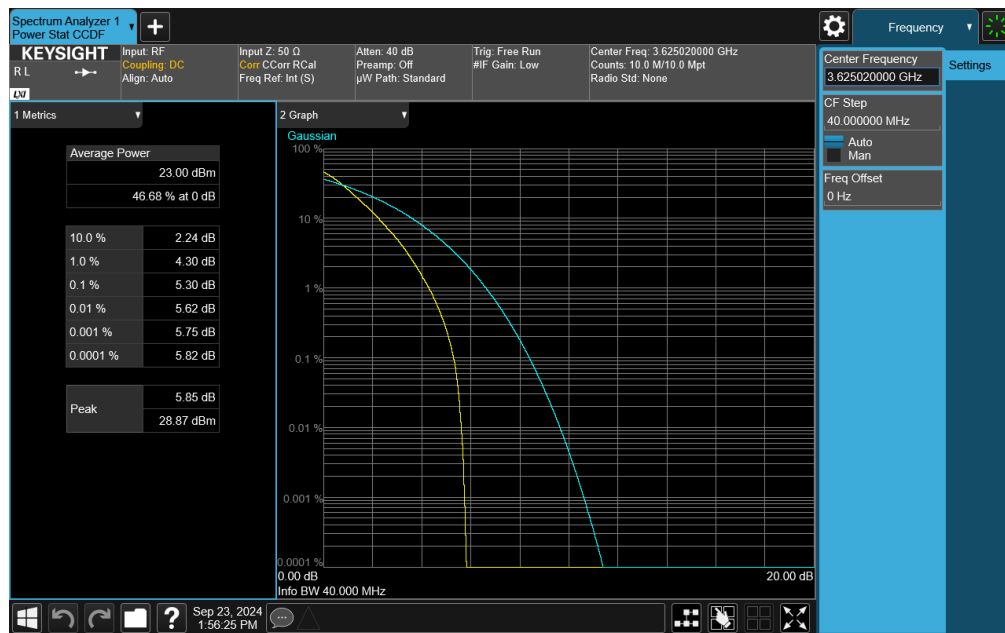


Plot 7-158. PAR Plot (NR Band n48 - 40MHz DFT-s-OFDM QPSK)


FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device
		Page 99 of 139

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

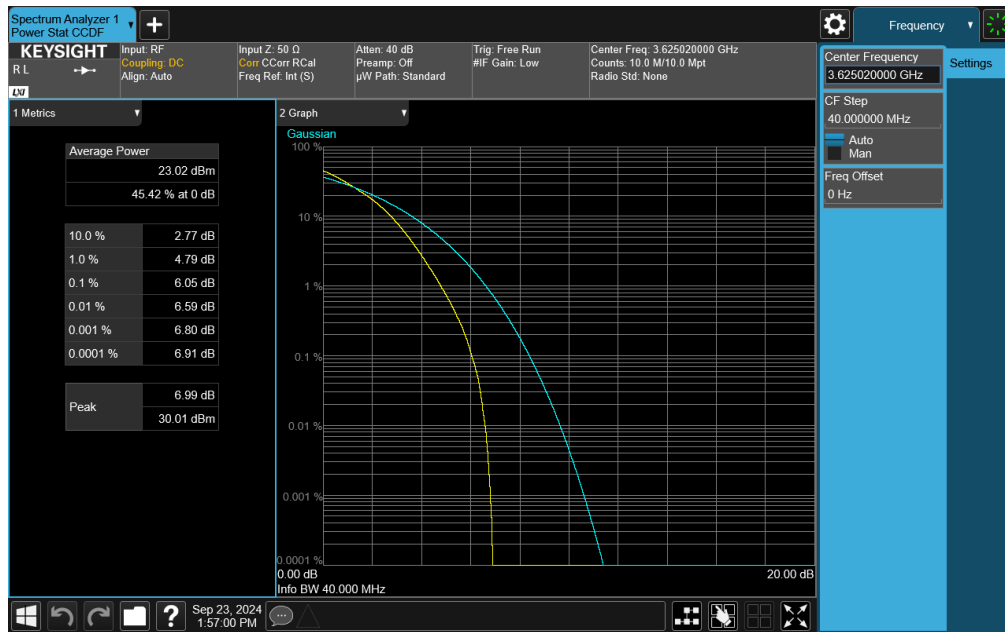

Plot 7-159. PAR Plot (NR Band n48 - 40MHz DFT-s-OFDM 16-QAM)

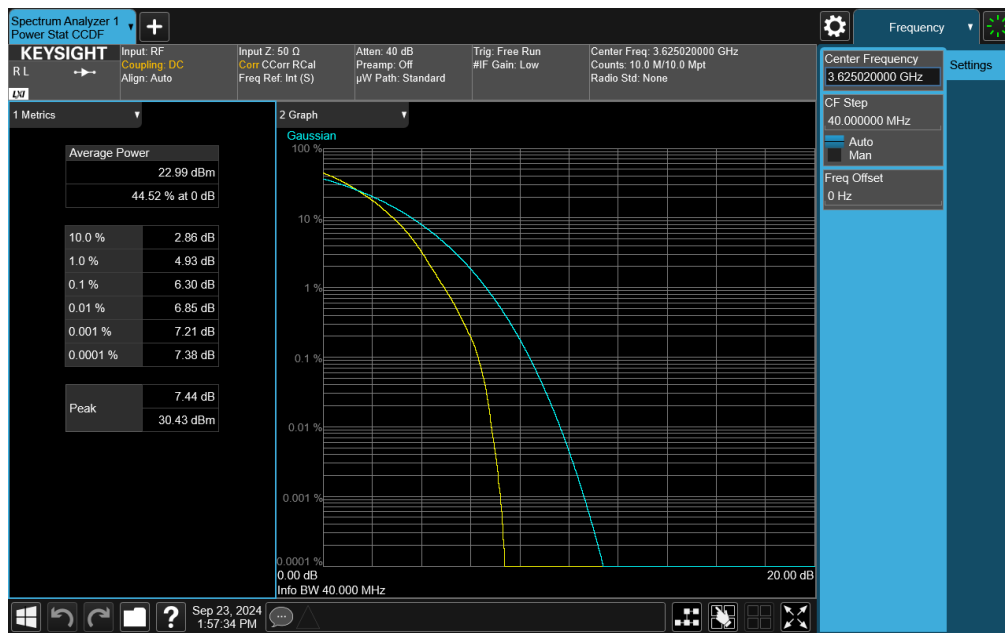


Plot 7-160. PAR Plot (NR Band n48 - 40MHz DFT-s-OFDM 64-QAM)

FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device
		Page 100 of 139

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

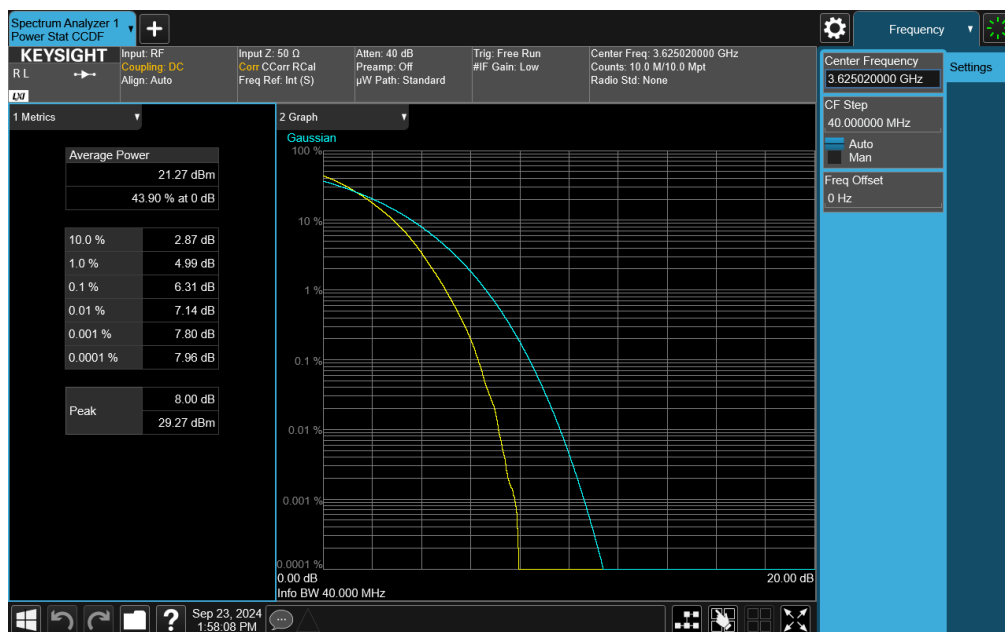

Plot 7-161. PAR Plot (NR Band n48 - 40MHz DFT-s-OFDM 256-QAM)

FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device
		Page 101 of 139

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.6 Radiated Power (EIRP)

§96.41(b)

Test Overview

Equivalent Isotropic Radiated Power (EIRP) measurements are calculated by adding highest antenna gain to maximum measured conducted output power. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI C63.26-2015

Test Settings

The relevant equation for determining the EIRP from the conducted RF output power measured is:

$$\text{EIRP} = \text{PMeas} - \text{LC} + \text{GT}$$

Where:

EIRP = Equivalent Isotropic Radiated Power (expressed in the same units as PMeas, typically dBW or dBm)

PMeas = measured transmitter output power or PSD, in dBW or dBm

LC = signal attenuation in the connecting cable between the transmitter and antenna in dB

GT = gain of the transmitting antenna, in dBi (EIRP)

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-9. LTE EIRP Measurement Setup




Figure 7-10. FR1 Test Instrument & Measurement Setup

FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device
		Page 102 of 139

V2.2 09/07/2023

Test Notes

- 1) The worst case emissions are reported with the modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.
- 3) The Level (dBm) readings in the table were taken with a correction table loaded into the base station simulator. The correction table was used to account for the signal attenuation in the connecting cable between the transmitter and antenna.
- 4) The worst case EIRP shown in this section is found with LTE & NR operating only using 1RB. As such, the EIRP/10MHz and full channel EIRP values will be identical since 1RB is fully contained within all available channel bandwidths for LTE Band 48 (i.e. 5, 10, 15, 20MHz) and NR FR1 Band 48 (i.e. 10, 15, 20, 30, 40MHz).
- 5) Uplink carrier aggregation for LTE B48 is only supported in this EUT while operating in Power Class 3.
- 6) For ULCA, conducted power measurements were evaluated for the two contiguous channels using various combinations of RB size, RB offset, modulation, and channel bandwidth. Channel bandwidth data is shown in the tables below based only on the channel bandwidths that were supported in this device.

FCC ID: BCGA3267		PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device	Page 103 of 139

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.6.1 Antenna 3b – EIRP

Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	EIRP [dBm/10MHz]	EIRP [Watts/10MHz]	EIRP Limit [dBm/10MHz]	Margin [dB]
5 MHz	QPSK	3552.5	3.30	1 / 24	19.17	22.47	0.177	23.00	-0.53
		3625.0	3.30	1 / 24	19.20	22.50	0.178	23.00	-0.50
		3697.5	3.30	1 / 12	18.85	22.15	0.164	23.00	-0.85
	16-QAM	3552.5	3.30	1 / 0	18.13	21.43	0.139	23.00	-1.57
	64-QAM	3552.5	3.30	1 / 0	17.03	20.33	0.108	23.00	-2.67
	256-QAM	3552.5	3.30	1 / 24	14.30	17.60	0.058	23.00	-5.40
10 MHz	QPSK	3555.0	3.30	1 / 25	19.08	22.38	0.173	23.00	-0.62
		3625.0	3.30	1 / 25	19.20	22.50	0.178	23.00	-0.50
		3695.0	3.30	1 / 0	19.04	22.34	0.171	23.00	-0.66
	16-QAM	3625.0	3.30	1 / 0	18.18	21.48	0.141	23.00	-1.52
	64-QAM	3555.0	3.30	1 / 49	17.02	20.32	0.108	23.00	-2.68
	256-QAM	3625.0	3.30	1 / 49	14.26	17.56	0.057	23.00	-5.44
15 MHz	QPSK	3557.5	3.30	1 / 37	19.19	22.49	0.177	23.00	-0.51
		3625.0	3.30	1 / 0	19.02	22.32	0.171	23.00	-0.68
		3692.5	3.30	1 / 37	19.05	22.35	0.172	23.00	-0.65
	16-QAM	3692.5	3.30	1 / 37	18.16	21.46	0.140	23.00	-1.54
	64-QAM	3625.0	3.30	1 / 37	17.05	20.35	0.108	23.00	-2.65
	256-QAM	3625.0	3.30	1 / 37	14.30	17.60	0.058	23.00	-5.40
20 MHz	QPSK	3560.0	3.30	1 / 50	18.90	22.20	0.166	23.00	-0.80
		3625.0	3.30	1 / 0	19.12	22.42	0.175	23.00	-0.58
		3690.0	3.30	1 / 0	19.16	22.46	0.176	23.00	-0.54
	16-QAM	3690.0	3.30	1 / 0	18.18	21.48	0.141	23.00	-1.52
	64-QAM	3625.0	3.30	1 / 50	17.14	20.44	0.111	23.00	-2.56
	256-QAM	3690.0	3.30	1 / 99	14.29	17.59	0.057	23.00	-5.41

Table 7-1. EIRP Data (LTE Band 48)

FCC ID: BCGA3267		PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device		Page 104 of 139

V2.2 09/07/2023

Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	EIRP [dBm/10MHz]	EIRP [Watts/10MHz]	EIRP Limit [dBm/10MHz]	Margin [dB]
10 MHz	π/2 BPSK	3555.0	3.30	1 / 22	19.11	22.41	0.174	23.00	-0.59
		3625.0	3.30	1 / 12	19.20	22.50	0.178	23.00	-0.50
		3695.0	3.30	1 / 22	19.17	22.47	0.177	23.00	-0.53
	QPSK	3555.0	3.30	1 / 12	19.19	22.49	0.177	23.00	-0.51
		3625.0	3.30	1 / 12	19.18	22.48	0.177	23.00	-0.52
		3695.0	3.30	1 / 1	18.95	22.25	0.168	23.00	-0.75
	16-QAM	3695.0	3.30	1 / 22	18.18	21.48	0.141	23.00	-1.52
	64-QAM	3555.0	3.30	1 / 22	17.04	20.34	0.108	23.00	-2.66
	256-QAM	3625.0	3.30	1 / 12	14.28	17.58	0.057	23.00	-5.42
	π/2 BPSK	3557.5	3.30	1 / 36	19.16	22.46	0.176	23.00	-0.54
		3625.0	3.30	1 / 1	19.18	22.48	0.177	23.00	-0.52
		3692.5	3.30	1 / 36	18.79	22.09	0.162	23.00	-0.91
15 MHz	QPSK	3557.5	3.30	1 / 36	19.07	22.37	0.173	23.00	-0.63
		3625.0	3.30	1 / 36	19.01	22.31	0.170	23.00	-0.69
		3692.5	3.30	1 / 18	18.93	22.23	0.167	23.00	-0.77
	16-QAM	3692.5	3.30	1 / 1	18.13	21.43	0.139	23.00	-1.57
	64-QAM	3557.5	3.30	1 / 36	17.07	20.37	0.109	23.00	-2.63
	256-QAM	3692.5	3.30	1 / 18	14.24	17.54	0.057	23.00	-5.46
20 MHz	π/2 BPSK	3560.0	3.30	1 / 49	19.03	22.33	0.171	23.00	-0.67
		3625.0	3.30	1 / 1	18.91	22.21	0.166	23.00	-0.79
		3690.0	3.30	1 / 25	19.09	22.39	0.173	23.00	-0.61
	QPSK	3560.0	3.30	1 / 1	18.93	22.23	0.167	23.00	-0.77
		3625.0	3.30	1 / 1	19.16	22.46	0.176	23.00	-0.54
		3690.0	3.30	1 / 25	19.19	22.49	0.177	23.00	-0.51
	16-QAM	3560.0	3.30	1 / 1	18.12	21.42	0.139	23.00	-1.58
	256-QAM	3690.0	3.30	1 / 49	14.26	17.56	0.057	23.00	-5.44
30 MHz	π/2 BPSK	3565.0	3.30	1 / 1	19.15	22.45	0.176	23.00	-0.55
		3625.0	3.30	1 / 76	19.16	22.46	0.176	23.00	-0.54
		3685.0	3.30	1 / 76	19.02	22.32	0.171	23.00	-0.68
	QPSK	3565.0	3.30	1 / 36	19.01	22.31	0.170	23.00	-0.69
		3625.0	3.30	1 / 1	18.89	22.19	0.166	23.00	-0.81
		3685.0	3.30	1 / 1	19.03	22.33	0.171	23.00	-0.67
	16-QAM	3685.0	3.30	1 / 36	18.06	21.36	0.137	23.00	-1.64
	256-QAM	3565.0	3.30	1 / 76	14.30	17.60	0.058	23.00	-5.40
40 MHz	π/2 BPSK	3570.0	3.30	1 / 104	19.11	22.41	0.174	23.00	-0.59
		3625.0	3.30	1 / 50	19.00	22.30	0.170	23.00	-0.70
		3680.0	3.30	1 / 50	19.12	22.42	0.175	23.00	-0.58
	QPSK	3570.0	3.30	1 / 104	18.91	22.21	0.166	23.00	-0.79
		3625.0	3.30	1 / 104	18.87	22.17	0.165	23.00	-0.83
		3680.0	3.30	1 / 1	19.04	22.34	0.171	23.00	-0.66
	16-QAM	3680.0	3.30	1 / 50	18.08	21.38	0.137	23.00	-1.62
	256-QAM	3570.0	3.30	1 / 50	17.20	20.50	0.112	23.00	-2.50
		3625.0	3.30	1 / 1	14.27	17.57	0.057	23.00	-5.43

Table 7-2. EIRP Data (NR Band n48)

FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device	Page 105 of 139

V2.2 09/07/2023

Power State	Band	Bandwidth (PCC + SCC)	Modulation	PCC			UL RB Offset	Modulation	SCC			UL RB Offset	ULCA Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm/10MHz]	EIRP [Watts/10MHz]	EIRP Limit [dBm/10MHz]	Margin [dB]
				UL Channel	UL Frequency [MHz]	UL # RB			UL Channel	UL Frequency [MHz]	UL # RB							
Max	LTE B48	20MHz + 5MHz	QPSK	55340	3560.0	1	99	QPSK	55457	3571.7	1	0	19.09	3.30	22.39	0.173	23.00	-0.61
				55990	3625.0	1	99		56107	3636.7	1	0	18.95	3.30	22.25	0.168	23.00	-0.75
				56640	3690.0	1	0		56623	3678.3	1	24	18.8	3.30	22.10	0.162	23.00	-0.90
			16-QAM	55340	3560	100	0	16-QAM	55457	3571.7	25	0	18.86	3.30	22.16	0.164	23.00	-0.84
				55340	3560	100	0		55457	3571.7	25	0	18.92	3.30	22.22	0.167	23.00	-0.78
				55340	3560	100	0		55457	3571.7	25	0	18.77	3.30	22.07	0.161	23.00	-0.93
Max	LTE B48	20MHz + 10MHz	QPSK	55340	3560.0	1	99	QPSK	55484	3574.4	1	1	18.79	3.30	22.09	0.162	23.00	-0.91
				55990	3625.0	1	99		56134	3639.4	1	0	19.05	3.30	22.35	0.172	23.00	-0.65
				56640	3690.0	1	0		56496	3675.6	1	49	18.88	3.30	22.18	0.165	23.00	-0.82
			16-QAM	55990	3625	100	0	16-QAM	56134	3639.4	50	0	19.01	3.30	22.31	0.170	23.00	-0.69
				55990	3625	100	0		56134	3639.4	50	0	18.95	3.30	22.25	0.168	23.00	-0.75
				55990	3625	100	0		56134	3639.4	50	0	18.92	3.30	22.22	0.167	23.00	-0.78
Max	LTE B48	20MHz + 15MHz	QPSK	55340	3560.0	1	99	QPSK	55511	3577.1	1	0	18.73	3.30	22.03	0.160	23.00	-0.97
				55990	3625.0	1	99		56161	3642.1	1	0	18.84	3.30	22.14	0.164	23.00	-0.86
				56640	3690.0	1	0		56469	3672.9	1	74	18.96	3.30	22.26	0.168	23.00	-0.74
			16-QAM	56640	3690	100	0	16-QAM	56469	3672.9	75	0	18.72	3.30	22.02	0.159	23.00	-0.98
				56640	3690	100	0		56469	3672.9	75	0	18.77	3.30	22.07	0.161	23.00	-0.93
				56640	3690	100	0		56469	3672.9	75	0	18.71	3.30	22.01	0.159	23.00	-0.99
Max	LTE B48	20MHz + 20MHz	QPSK	55340	3560.0	1	99	QPSK	55484	3574.4	1	1	18.79	3.30	22.09	0.162	23.00	-0.91
				55990	3625.0	1	99		56188	3644.8	1	0	18.97	3.30	22.27	0.169	23.00	-0.73
				56640	3690.0	1	0		56442	3670.2	1	99	19.02	3.30	22.32	0.171	23.00	-0.68
			16-QAM	56640	3690	100	0	16-QAM	56442	3670.2	100	0	18.92	3.30	22.22	0.167	23.00	-0.78
				56640	3690	100	0		56442	3670.2	100	0	18.86	3.30	22.16	0.164	23.00	-0.84
				56640	3690	100	0		56442	3670.2	100	0	18.77	3.30	22.07	0.161	23.00	-0.93

Table 7-3. EIRP Data (ULCA LTE Band 48)

FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device	Page 106 of 139

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.6.2 Antenna 2a – EIRP

Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	EIRP [dBm/10MHz]	EIRP [Watts/10MHz]	EIRP Limit [dBm/10MHz]	Margin [dB]
5 MHz	QPSK	3552.5	2.60	1 / 24	19.86	22.46	0.176	23.00	-0.54
		3625.0	2.60	1 / 24	19.83	22.43	0.175	23.00	-0.57
		3697.5	2.60	1 / 24	19.88	22.48	0.177	23.00	-0.52
	16-QAM	3552.5	2.60	1 / 12	18.86	21.46	0.140	23.00	-1.54
	64-QAM	3697.5	2.60	1 / 0	17.71	20.31	0.107	23.00	-2.69
	256-QAM	3625.0	2.60	1 / 12	14.97	17.57	0.057	23.00	-5.43
10 MHz	QPSK	3555.0	2.60	1 / 0	19.62	22.22	0.167	23.00	-0.78
		3625.0	2.60	1 / 0	19.85	22.45	0.176	23.00	-0.55
		3695.0	2.60	1 / 25	19.80	22.40	0.174	23.00	-0.60
	16-QAM	3555.0	2.60	1 / 49	18.75	21.35	0.136	23.00	-1.65
	64-QAM	3625.0	2.60	1 / 0	17.89	20.49	0.112	23.00	-2.51
	256-QAM	3555.0	2.60	1 / 0	14.98	17.58	0.057	23.00	-5.42
15 MHz	QPSK	3557.5	2.60	1 / 74	19.68	22.28	0.169	23.00	-0.72
		3625.0	2.60	1 / 0	19.85	22.45	0.176	23.00	-0.55
		3692.5	2.60	1 / 0	19.70	22.30	0.170	23.00	-0.70
	16-QAM	3625.0	2.60	1 / 37	18.89	21.49	0.141	23.00	-1.51
	64-QAM	3557.5	2.60	1 / 74	17.89	20.49	0.112	23.00	-2.51
	256-QAM	3557.5	2.60	1 / 37	14.79	17.39	0.055	23.00	-5.61
20 MHz	QPSK	3560.0	2.60	1 / 50	19.72	22.32	0.171	23.00	-0.68
		3625.0	2.60	1 / 50	19.80	22.40	0.174	23.00	-0.60
		3690.0	2.60	1 / 0	19.82	22.42	0.175	23.00	-0.58
	16-QAM	3625.0	2.60	1 / 50	18.89	21.49	0.141	23.00	-1.51
	64-QAM	3560.0	2.60	1 / 99	17.85	20.45	0.111	23.00	-2.55
	256-QAM	3625.0	2.60	1 / 0	14.98	17.58	0.057	23.00	-5.42

Table 7-4. EIRP Data (LTE Band 48)

FCC ID: BCGA3267		PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device		Page 107 of 139

V2.2 09/07/2023

Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	EIRP [dBm/10MHz]	EIRP [Watts/10MHz]	EIRP Limit [dBm/10MHz]	Margin [dB]
10 MHz	π/2 BPSK	3555.0	2.60	1 / 1	19.86	22.46	0.176	23.00	-0.54
		3625.0	2.60	1 / 12	19.79	22.39	0.173	23.00	-0.61
		3695.0	2.60	1 / 22	19.83	22.43	0.175	23.00	-0.57
	QPSK	3555.0	2.60	1 / 1	19.88	22.48	0.177	23.00	-0.52
		3625.0	2.60	1 / 1	19.77	22.37	0.173	23.00	-0.63
		3695.0	2.60	1 / 1	19.87	22.47	0.177	23.00	-0.53
	16-QAM 64-QAM	3625.0	2.60	1 / 12	18.87	21.47	0.140	23.00	-1.53
		3625.0	2.60	1 / 22	17.76	20.36	0.109	23.00	-2.64
	256-QAM	3555.0	2.60	1 / 1	14.96	17.56	0.057	23.00	-5.44
	π/2 BPSK	3557.5	2.60	1 / 18	19.66	22.26	0.168	23.00	-0.74
		3625.0	2.60	1 / 36	19.79	22.39	0.173	23.00	-0.61
		3692.5	2.60	1 / 36	19.89	22.49	0.177	23.00	-0.51
15 MHz	QPSK	3557.5	2.60	1 / 1	19.84	22.44	0.175	23.00	-0.56
		3625.0	2.60	1 / 18	19.85	22.45	0.176	23.00	-0.55
		3692.5	2.60	1 / 18	19.80	22.40	0.174	23.00	-0.60
	16-QAM	3625.0	2.60	1 / 1	18.89	21.49	0.141	23.00	-1.51
	64-QAM	3557.5	2.60	1 / 36	17.86	20.46	0.111	23.00	-2.54
	256-QAM	3692.5	2.60	1 / 1	14.74	17.34	0.054	23.00	-5.66
20 MHz	π/2 BPSK	3560.0	2.60	1 / 1	19.81	22.41	0.174	23.00	-0.59
		3625.0	2.60	1 / 1	19.74	22.34	0.171	23.00	-0.66
		3690.0	2.60	1 / 49	19.82	22.42	0.175	23.00	-0.58
	QPSK	3560.0	2.60	1 / 1	19.66	22.26	0.168	23.00	-0.74
		3625.0	2.60	1 / 49	19.71	22.31	0.170	23.00	-0.69
		3690.0	2.60	1 / 25	19.85	22.45	0.176	23.00	-0.55
	16-QAM	3560.0	2.60	1 / 25	18.88	21.48	0.141	23.00	-1.52
	64-QAM	3560.0	2.60	1 / 49	17.81	20.41	0.110	23.00	-2.59
	256-QAM	3625.0	2.60	1 / 49	14.84	17.44	0.055	23.00	-5.56
30 MHz	π/2 BPSK	3565.0	2.60	1 / 76	19.86	22.46	0.176	23.00	-0.54
		3625.0	2.60	1 / 76	19.87	22.47	0.177	23.00	-0.53
		3685.0	2.60	1 / 36	19.86	22.46	0.176	23.00	-0.54
	QPSK	3565.0	2.60	1 / 76	19.71	22.31	0.170	23.00	-0.69
		3625.0	2.60	1 / 1	19.76	22.36	0.172	23.00	-0.64
		3685.0	2.60	1 / 36	19.69	22.29	0.169	23.00	-0.71
	16-QAM	3565.0	2.60	1 / 76	18.84	21.44	0.139	23.00	-1.56
	64-QAM	3565.0	2.60	1 / 76	17.89	20.49	0.112	23.00	-2.51
	256-QAM	3565.0	2.60	1 / 76	14.95	17.55	0.057	23.00	-5.45
40 MHz	π/2 BPSK	3570.0	2.60	1 / 104	19.84	22.44	0.175	23.00	-0.56
		3625.0	2.60	1 / 50	19.88	22.48	0.177	23.00	-0.52
		3680.0	2.60	1 / 1	19.79	22.39	0.173	23.00	-0.61
	QPSK	3570.0	2.60	1 / 50	19.73	22.33	0.171	23.00	-0.67
		3625.0	2.60	1 / 104	19.71	22.31	0.170	23.00	-0.69
		3680.0	2.60	1 / 50	19.88	22.48	0.177	23.00	-0.52
	16-QAM	3680.0	2.60	1 / 50	18.86	21.46	0.140	23.00	-1.54
	64-QAM	3680.0	2.60	1 / 50	17.87	20.47	0.111	23.00	-2.53
	256-QAM	3625.0	2.60	1 / 50	14.98	17.58	0.057	23.00	-5.42

Table 7-5. EIRP Data (NR Band n48)

FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device	Page 108 of 139

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Power State	Band	Bandwidth (PCC + SCC)	PCC					SCC					ULCA Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm/10MHz]	EIRP [Watts/10MHz]	EIRP Limit [dBm/10MHz]	Margin [dB]			
			Modulation	UL Channel	UL Frequency [MHz]	UL # RB	UL RB Offset	Modulation	UL Channel	UL Frequency [MHz]	UL # RB	UL RB Offset									
Max	LTE B48	20MHz + 5MHz	QPSK	55340	3560.0	1	99	QPSK	55457	3571.7	1	0	19.8	2.60	22.40	0.174	23.00	-0.60			
				55990	3625.0	1	99		56107	3638.7	1	0	18.5	2.60	21.10	0.129	23.00	-1.90			
				56640	3690.0	1	0		56523	3678.3	1	24	17.89	2.60	20.49	0.112	23.00	-2.51			
			QPSK	55340	3560	100	0	QPSK	55457	3571.7	25	0	19.48	2.60	22.08	0.161	23.00	-0.92			
			16-QAM	55340	3560	100	0	16-QAM	55457	3571.7	25	0	19.42	2.60	22.02	0.159	23.00	-0.98			
Max	LTE B48	20MHz + 10MHz	64-QAM	55340	3560	100	0	64-QAM	55457	3571.7	25	0	19.45	2.60	22.05	0.160	23.00	-0.95			
			256-QAM	55340	3560	100	0	256-QAM	55457	3571.7	25	0	19.39	2.60	21.99	0.158	23.00	-1.01			
				55340	3560.0	1	99	55484	3574.4	1	0	18.02	2.60	20.62	0.115	23.00	-2.38				
			QPSK	55990	3625.0	1	99	56134	3639.4	1	0	18.68	2.60	21.28	0.134	23.00	-1.72				
				56640	3690.0	1	0	56496	3675.6	1	49	19.76	2.60	22.36	0.172	23.00	-0.64				
			QPSK	56640	3690	100	0	QPSK	56496	3675.6	50	0	18.96	2.60	21.56	0.143	23.00	-1.44			
			16-QAM	56640	3690	100	0	16-QAM	56496	3675.6	50	0	18.91	2.60	21.51	0.142	23.00	-1.49			
			64-QAM	56640	3690	100	0	64-QAM	56496	3675.6	50	0	18.85	2.60	21.45	0.140	23.00	-1.55			
			256-QAM	56640	3690	100	0	256-QAM	56496	3675.6	50	0	18.79	2.60	21.39	0.138	23.00	-1.61			
			Max	LTE B48	20MHz + 15MHz	QPSK	55340	3560.0	1	99	QPSK	55511	3577.1	1	0	17.41	2.60	20.01	0.100	23.00	-2.99
55990	3625.0	1					99	56161	3642.1	1		0	19.83	2.60	22.43	0.175	23.00	-0.57			
56640	3690.0	1					0	56469	3672.9	1		74	17.39	2.60	19.99	0.100	23.00	-3.01			
QPSK	55990	3625				100	0	QPSK	56161	3642.1	75	0	18.92	2.60	21.52	0.142	23.00	-1.48			
16-QAM	55990	3625				100	0	16-QAM	56161	3642.1	75	0	18.88	2.60	21.48	0.141	23.00	-1.52			
64-QAM	55990	3625				100	0	64-QAM	56161	3642.1	75	0	18.91	2.60	21.51	0.142	23.00	-1.49			
256-QAM	55990	3625				100	0	256-QAM	56161	3642.1	75	0	18.85	2.60	21.45	0.140	23.00	-1.55			
	55340	3560.0				1	99	55538	3579.8	1	0	18.86	2.60	21.46	0.140	23.00	-1.54				
Max	LTE B48	20MHz + 20MHz				QPSK	55990	3625.0	1	99	QPSK	56188	3644.8	1	0	19.89	2.60	22.49	0.177	23.00	-0.51
							56640	3690.0	1	0		56442	3670.2	1	99	18.83	2.60	21.43	0.139	23.00	-1.57
			QPSK	55990	3625		100	0	QPSK	56188		3644.8	100	0	18.96	2.60	21.56	0.143	23.00	-1.44	
			16-QAM	55990	3625	100	0	16-QAM	56188	3644.8	100	0	18.91	2.60	21.51	0.142	23.00	-1.49			
			64-QAM	55990	3625	100	0	64-QAM	56188	3644.8	100	0	18.86	2.60	21.46	0.140	23.00	-1.54			
256-QAM	55990	3625	100	0	256-QAM	56188	3644.8	100	0	18.79	2.60	21.39	0.138	23.00	-1.61						

Table 7-6. EIRP Data (ULCA LTE Band 48)

FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device	Page 109 of 139

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.6.3 Antenna 4 – EIRP

Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	EIRP [dBm/10MHz]	EIRP [Watts/10MHz]	EIRP Limit [dBm/10MHz]	Margin [dB]
5 MHz	QPSK	3552.5	-0.50	1 / 12	22.98	22.48	0.177	23.00	-0.52
		3625.0	-0.50	1 / 24	22.77	22.27	0.169	23.00	-0.73
		3697.5	-0.50	1 / 12	22.82	22.32	0.171	23.00	-0.68
	16-QAM	3625.0	-0.50	1 / 12	21.93	21.43	0.139	23.00	-1.57
	64-QAM	3625.0	-0.50	1 / 24	20.98	20.48	0.112	23.00	-2.52
	256-QAM	3625.0	-0.50	1 / 24	17.93	17.43	0.055	23.00	-5.57
10 MHz	QPSK	3555.0	-0.50	1 / 49	22.78	22.28	0.169	23.00	-0.72
		3625.0	-0.50	1 / 25	22.99	22.49	0.177	23.00	-0.51
		3695.0	-0.50	1 / 0	22.92	22.42	0.175	23.00	-0.58
	16-QAM	3695.0	-0.50	1 / 25	22.00	21.50	0.141	23.00	-1.50
	64-QAM	3555.0	-0.50	1 / 25	20.97	20.47	0.111	23.00	-2.53
	256-QAM	3695.0	-0.50	1 / 0	18.08	17.58	0.057	23.00	-5.42
15 MHz	QPSK	3557.5	-0.50	1 / 0	22.93	22.43	0.175	23.00	-0.57
		3625.0	-0.50	1 / 0	22.94	22.44	0.175	23.00	-0.56
		3692.5	-0.50	1 / 0	22.95	22.45	0.176	23.00	-0.55
	16-QAM	3692.5	-0.50	1 / 74	21.93	21.43	0.139	23.00	-1.57
	64-QAM	3625.0	-0.50	1 / 0	21.00	20.50	0.112	23.00	-2.50
	256-QAM	3625.0	-0.50	1 / 37	18.02	17.52	0.056	23.00	-5.48
20 MHz	QPSK	3560.0	-0.50	1 / 0	22.95	22.45	0.176	23.00	-0.55
		3625.0	-0.50	1 / 0	22.74	22.24	0.167	23.00	-0.76
		3690.0	-0.50	1 / 50	22.84	22.34	0.171	23.00	-0.66
	16-QAM	3690.0	-0.50	1 / 99	21.96	21.46	0.140	23.00	-1.54
	64-QAM	3690.0	-0.50	1 / 0	20.91	20.41	0.110	23.00	-2.59
	256-QAM	3690.0	-0.50	1 / 0	18.01	17.51	0.056	23.00	-5.49

Table 7-7. EIRP Data (LTE Band 48)

FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device	Page 110 of 139

V2.2 09/07/2023

Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	EIRP [dBm/10MHz]	EIRP [Watts/10MHz]	EIRP Limit [dBm/10MHz]	Margin [dB]
10 MHz	π/2 BPSK	3555.0	-0.50	1 / 1	22.87	22.37	0.173	23.00	-0.63
		3625.0	-0.50	1 / 12	22.68	22.18	0.165	23.00	-0.82
		3695.0	-0.50	1 / 22	22.99	22.49	0.177	23.00	-0.51
	QPSK	3555.0	-0.50	1 / 12	22.77	22.27	0.169	23.00	-0.73
		3625.0	-0.50	1 / 22	22.82	22.32	0.171	23.00	-0.68
		3695.0	-0.50	1 / 22	22.82	22.32	0.171	23.00	-0.68
	16-QAM	3625.0	-0.50	1 / 1	21.98	21.48	0.141	23.00	-1.52
	64-QAM	3695.0	-0.50	1 / 1	20.97	20.47	0.111	23.00	-2.53
	256-QAM	3625.0	-0.50	1 / 22	17.97	17.47	0.056	23.00	-5.53
	π/2 BPSK	3557.5	-0.50	1 / 1	22.95	22.45	0.176	23.00	-0.55
		3625.0	-0.50	1 / 18	22.80	22.30	0.170	23.00	-0.70
		3692.5	-0.50	1 / 1	23.00	22.50	0.178	23.00	-0.50
15 MHz	QPSK	3557.5	-0.50	1 / 1	22.98	22.48	0.177	23.00	-0.52
		3625.0	-0.50	1 / 1	22.81	22.31	0.170	23.00	-0.69
		3692.5	-0.50	1 / 18	22.90	22.40	0.174	23.00	-0.60
	16-QAM	3557.5	-0.50	1 / 1	21.97	21.47	0.140	23.00	-1.53
	64-QAM	3692.5	-0.50	1 / 1	20.94	20.44	0.111	23.00	-2.56
	256-QAM	3557.5	-0.50	1 / 36	18.07	17.57	0.057	23.00	-5.43
20 MHz	π/2 BPSK	3560.0	-0.50	1 / 25	22.82	22.32	0.171	23.00	-0.68
		3625.0	-0.50	1 / 49	22.72	22.22	0.167	23.00	-0.78
		3690.0	-0.50	1 / 1	23.00	22.50	0.178	23.00	-0.50
	QPSK	3560.0	-0.50	1 / 1	22.83	22.33	0.171	23.00	-0.67
		3625.0	-0.50	1 / 25	22.96	22.46	0.176	23.00	-0.54
		3690.0	-0.50	1 / 1	22.83	22.33	0.171	23.00	-0.67
	16-QAM	3690.0	-0.50	1 / 49	22.00	21.50	0.141	23.00	-1.50
	64-QAM	3560.0	-0.50	1 / 25	20.95	20.45	0.111	23.00	-2.55
	256-QAM	3560.0	-0.50	1 / 25	18.07	17.57	0.057	23.00	-5.43
30 MHz	π/2 BPSK	3565.0	-0.50	1 / 1	22.91	22.41	0.174	23.00	-0.59
		3625.0	-0.50	1 / 76	22.97	22.47	0.177	23.00	-0.53
		3685.0	-0.50	1 / 76	22.96	22.46	0.176	23.00	-0.54
	QPSK	3565.0	-0.50	1 / 36	22.78	22.28	0.169	23.00	-0.72
		3625.0	-0.50	1 / 1	22.94	22.44	0.175	23.00	-0.56
		3685.0	-0.50	1 / 36	22.91	22.41	0.174	23.00	-0.59
	16-QAM	3685.0	-0.50	1 / 36	21.95	21.45	0.140	23.00	-1.55
	64-QAM	3625.0	-0.50	1 / 36	21.00	20.50	0.112	23.00	-2.50
	256-QAM	3565.0	-0.50	1 / 1	18.08	17.58	0.057	23.00	-5.42
40 MHz	π/2 BPSK	3570.0	-0.50	1 / 104	22.98	22.48	0.177	23.00	-0.52
		3625.0	-0.50	1 / 50	22.91	22.41	0.174	23.00	-0.59
		3680.0	-0.50	1 / 50	22.81	22.31	0.170	23.00	-0.69
	QPSK	3570.0	-0.50	1 / 1	22.85	22.35	0.172	23.00	-0.65
		3625.0	-0.50	1 / 104	22.97	22.47	0.177	23.00	-0.53
		3680.0	-0.50	1 / 104	22.97	22.47	0.177	23.00	-0.53
	16-QAM	3625.0	-0.50	1 / 104	22.00	21.50	0.141	23.00	-1.50
	64-QAM	3625.0	-0.50	1 / 50	20.98	20.48	0.112	23.00	-2.52
	256-QAM	3680.0	-0.50	1 / 1	18.09	17.59	0.057	23.00	-5.41

Table 7-8. EIRP Data (NR Band n48)

FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device	Page 111 of 139

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Power State	Band	Bandwidth (PCC + SCC)	PCC					SCC					ULCA Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm/10MHz]	EIRP [Watts/10MHz]	EIRP Limit [dBm/10MHz]	Margin [dB]	
			Modulation	UL Channel	UL Frequency [MHz]	UL # RB	UL RB Offset	Modulation	UL Channel	UL Frequency [MHz]	UL # RB	UL RB Offset							
Max	LTE B48	20MHz + 5MHz	QPSK	55340	3560.0	1	99	QPSK	55457	3571.7	1	0	22.49	-0.50	21.99	0.158	23.00	-1.01	
				55990	3625.0	1	99		56107	3636.7	1	0	21.52	-0.50	21.02	0.126	23.00	-1.98	
				56640	3690.0	1	0		56523	3678.3	1	24	20.48	-0.50	19.98	0.100	23.00	-3.02	
			16-QAM	55340	3560	100	0	16-QAM	55457	3571.7	25	0	21.57	-0.50	21.07	0.128	23.00	-1.93	
				55340	3560	100	0		55457	3571.7	25	0	21.51	-0.50	21.01	0.126	23.00	-1.99	
				55340	3560	100	0		55457	3571.7	25	0	21.46	-0.50	20.96	0.125	23.00	-2.04	
Max	LTE B48	20MHz + 10MHz	256-QAM	55340	3560	100	0	256-QAM	55457	3571.7	25	0	21.39	-0.50	20.89	0.123	23.00	-2.11	
				55340	3560.0	1	99		56484	3674.4	1	0	19.65	-0.50	19.15	0.082	23.00	-3.85	
				55990	3625.0	1	99		56134	3639.4	1	0	22.96	-0.50	22.46	0.176	23.00	-0.54	
			QPSK	56640	3690.0	1	0	QPSK	56496	3675.6	1	49	19.59	-0.50	19.09	0.081	23.00	-3.91	
				55990	3625	100	0		QPSK	56134	3639.4	50	0	21.12	-0.50	20.62	0.115	23.00	-2.38
				55990	3625	100	0			16-QAM	56134	3639.4	50	0	21.05	-0.50	20.55	0.114	23.00
Max	LTE B48	20MHz + 15MHz	16-QAM	55990	3625	100	0	16-QAM		56134	3639.4	50	0	20.96	-0.50	20.46	0.111	23.00	-2.54
				55990	3625	100	0		256-QAM	56134	3639.4	50	0	20.95	-0.50	20.45	0.111	23.00	-2.55
				55990	3625	100	0		256-QAM	56134	3639.4	50	0	20.95	-0.50	20.45	0.111	23.00	-2.55
			QPSK	55340	3560.0	1	99	QPSK	55511	3577.1	1	0	19.53	-0.50	19.03	0.080	23.00	-3.97	
				55990	3625.0	1	99		56161	3642.1	1	0	22.85	-0.50	22.35	0.172	23.00	-0.65	
				56640	3690.0	1	0		56469	3672.9	1	74	19.48	-0.50	18.98	0.079	23.00	-4.02	
Max	LTE B48	20MHz + 20MHz	QPSK	55990	3625	100	0	QPSK	56161	3642.1	75	0	21.15	-0.50	20.65	0.116	23.00	-2.35	
				55990	3625	100	0		16-QAM	56161	3642.1	75	0	21.06	-0.50	20.56	0.114	23.00	-2.44
				55990	3625	100	0		64-QAM	56161	3642.1	75	0	20.93	-0.50	20.43	0.110	23.00	-2.57
			256-QAM	55990	3625	100	0	256-QAM	56161	3642.1	75	0	20.86	-0.50	20.36	0.109	23.00	-2.64	
				55340	3560.0	1	99		55538	3579.8	1	0	21.13	-0.50	20.63	0.116	23.00	-2.37	
				55990	3625.0	1	99		QPSK	56188	3644.8	1	0	20.8	-0.50	20.30	0.107	23.00	-2.70
Max	LTE B48	20MHz + 20MHz	QPSK	56640	3690.0	1	0	QPSK	56442	3670.2	1	99	22.89	-0.50	22.39	0.173	23.00	-0.61	
				56640	3690	100	0		16-QAM	56442	3670.2	100	0	20.96	-0.50	20.46	0.111	23.00	-2.54
				56640	3690	100	0		16-QAM	56442	3670.2	100	0	20.95	-0.50	20.45	0.111	23.00	-2.55
			16-QAM	56640	3690	100	0	16-QAM	56442	3670.2	100	0	20.89	-0.50	20.39	0.109	23.00	-2.61	
				56640	3690	100	0		256-QAM	56442	3670.2	100	0	20.75	-0.50	20.25	0.106	23.00	-2.75
				56640	3690	100	0		256-QAM	56442	3670.2	100	0	20.75	-0.50	20.25	0.106	23.00	-2.75

Table 7-9. EIRP Data (ULCA LTE Band 48)

FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device	Page 112 of 139

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.6.4 Antenna 1a – EIRP

Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	EIRP [dBm/10MHz]	EIRP [Watts/10MHz]	EIRP Limit [dBm/10MHz]	Margin [dB]
5 MHz	QPSK	3552.5	0.00	1 / 0	22.39	22.39	0.173	23.00	-0.61
		3625.0	0.00	1 / 12	22.44	22.44	0.175	23.00	-0.56
		3697.5	0.00	1 / 0	22.49	22.49	0.177	23.00	-0.51
	16-QAM	3697.5	0.00	1 / 0	21.48	21.48	0.141	23.00	-1.52
	64-QAM	3552.5	0.00	1 / 12	20.45	20.45	0.111	23.00	-2.55
	256-QAM	3697.5	0.00	1 / 0	17.54	17.54	0.057	23.00	-5.46
10 MHz	QPSK	3555.0	0.00	1 / 25	22.44	22.44	0.175	23.00	-0.56
		3625.0	0.00	1 / 25	22.48	22.48	0.177	23.00	-0.52
		3695.0	0.00	1 / 0	22.48	22.48	0.177	23.00	-0.52
	16-QAM	3625.0	0.00	1 / 49	21.47	21.47	0.140	23.00	-1.53
	64-QAM	3625.0	0.00	1 / 0	20.42	20.42	0.110	23.00	-2.58
	256-QAM	3555.0	0.00	1 / 25	17.57	17.57	0.057	23.00	-5.43
15 MHz	QPSK	3557.5	0.00	1 / 0	22.50	22.50	0.178	23.00	-0.50
		3625.0	0.00	1 / 0	22.44	22.44	0.175	23.00	-0.56
		3692.5	0.00	1 / 37	22.36	22.36	0.172	23.00	-0.64
	16-QAM	3692.5	0.00	1 / 0	21.34	21.34	0.136	23.00	-1.66
	64-QAM	3557.5	0.00	1 / 74	20.47	20.47	0.111	23.00	-2.53
	256-QAM	3625.0	0.00	1 / 74	17.60	17.60	0.058	23.00	-5.40
20 MHz	QPSK	3560.0	0.00	1 / 0	22.27	22.27	0.169	23.00	-0.73
		3625.0	0.00	1 / 99	22.12	22.12	0.163	23.00	-0.88
		3690.0	0.00	1 / 99	22.49	22.49	0.177	23.00	-0.51
	16-QAM	3625.0	0.00	1 / 50	21.50	21.50	0.141	23.00	-1.50
	64-QAM	3560.0	0.00	1 / 0	20.40	20.40	0.110	23.00	-2.60
	256-QAM	3690.0	0.00	1 / 0	17.58	17.58	0.057	23.00	-5.42

Table 7-10. EIRP Data (LTE Band 48)

FCC ID: BCGA3267		PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device		Page 113 of 139

V2.2 09/07/2023

Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	EIRP [dBm/10MHz]	EIRP [Watts/10MHz]	EIRP Limit [dBm/10MHz]	Margin [dB]
10 MHz	π/2 BPSK	3555.0	0.00	1 / 12	22.26	22.26	0.168	23.00	-0.74
		3625.0	0.00	1 / 22	22.48	22.48	0.177	23.00	-0.52
		3695.0	0.00	1 / 1	22.48	22.48	0.177	23.00	-0.52
	QPSK	3555.0	0.00	1 / 22	22.38	22.38	0.173	23.00	-0.62
		3625.0	0.00	1 / 1	22.37	22.37	0.173	23.00	-0.63
		3695.0	0.00	1 / 1	22.46	22.46	0.176	23.00	-0.54
	16-QAM	3695.0	0.00	1 / 12	21.41	21.41	0.138	23.00	-1.59
	64-QAM	3625.0	0.00	1 / 12	20.45	20.45	0.111	23.00	-2.55
	256-QAM	3695.0	0.00	1 / 1	17.60	17.60	0.058	23.00	-5.40
15 MHz	π/2 BPSK	3557.5	0.00	1 / 18	22.29	22.29	0.169	23.00	-0.71
		3625.0	0.00	1 / 1	22.49	22.49	0.177	23.00	-0.51
		3692.5	0.00	1 / 1	22.43	22.43	0.175	23.00	-0.57
	QPSK	3557.5	0.00	1 / 1	22.35	22.35	0.172	23.00	-0.65
		3625.0	0.00	1 / 36	22.32	22.32	0.171	23.00	-0.68
		3692.5	0.00	1 / 36	22.26	22.26	0.168	23.00	-0.74
	16-QAM	3625.0	0.00	1 / 36	21.40	21.40	0.138	23.00	-1.60
	64-QAM	3557.5	0.00	1 / 36	20.38	20.38	0.109	23.00	-2.62
	256-QAM	3625.0	0.00	1 / 18	17.53	17.53	0.057	23.00	-5.47
20 MHz	π/2 BPSK	3560.0	0.00	1 / 1	22.32	22.32	0.171	23.00	-0.68
		3625.0	0.00	1 / 25	22.16	22.16	0.164	23.00	-0.84
		3690.0	0.00	1 / 25	22.45	22.45	0.176	23.00	-0.55
	QPSK	3560.0	0.00	1 / 49	22.31	22.31	0.170	23.00	-0.69
		3625.0	0.00	1 / 49	22.42	22.42	0.175	23.00	-0.58
		3690.0	0.00	1 / 25	22.35	22.35	0.172	23.00	-0.65
	16-QAM	3625.0	0.00	1 / 25	21.50	21.50	0.141	23.00	-1.50
	64-QAM	3560.0	0.00	1 / 49	20.41	20.41	0.110	23.00	-2.59
	256-QAM	3625.0	0.00	1 / 1	17.59	17.59	0.057	23.00	-5.41
30 MHz	π/2 BPSK	3565.0	0.00	1 / 36	22.28	22.28	0.169	23.00	-0.72
		3625.0	0.00	1 / 36	22.30	22.30	0.170	23.00	-0.70
		3685.0	0.00	1 / 1	22.35	22.35	0.172	23.00	-0.65
	QPSK	3565.0	0.00	1 / 1	22.50	22.50	0.178	23.00	-0.50
		3625.0	0.00	1 / 36	22.25	22.25	0.168	23.00	-0.75
		3685.0	0.00	1 / 36	22.44	22.44	0.175	23.00	-0.56
	16-QAM	3685.0	0.00	1 / 36	21.46	21.46	0.140	23.00	-1.54
	64-QAM	3565.0	0.00	1 / 76	20.48	20.48	0.112	23.00	-2.52
	256-QAM	3625.0	0.00	1 / 1	17.54	17.54	0.057	23.00	-5.46
40 MHz	π/2 BPSK	3570.0	0.00	1 / 104	22.42	22.42	0.175	23.00	-0.58
		3625.0	0.00	1 / 50	22.49	22.49	0.177	23.00	-0.51
		3680.0	0.00	1 / 1	22.30	22.30	0.170	23.00	-0.70
	QPSK	3570.0	0.00	1 / 1	22.30	22.30	0.170	23.00	-0.70
		3625.0	0.00	1 / 50	22.26	22.26	0.168	23.00	-0.74
		3680.0	0.00	1 / 1	22.29	22.29	0.169	23.00	-0.71
	16-QAM	3680.0	0.00	1 / 104	21.47	21.47	0.140	23.00	-1.53
	64-QAM	3680.0	0.00	1 / 1	20.46	20.46	0.111	23.00	-2.54
	256-QAM	3570.0	0.00	1 / 50	17.58	17.58	0.057	23.00	-5.42

Table 7-11. EIRP Data (NR Band n48)

FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device	Page 114 of 139

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Power State	Band	Bandwidth (PCC + SCC)	PCC				SCC				ULCA Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm/10MHz]	EIRP [Watts/10MHz]	EIRP Limit [dBm/10MHz]	Margin [dB]
			Modulation	UL Channel	UL Frequency [MHz]	UL # RB	UL RB Offset	Modulation	UL Channel	UL Frequency [MHz]	UL # RB	UL RB Offset				
Max	LTE B48	20MHz + 5MHz	QPSK	55340	3560.0	1	99	QPSK	55457	3571.7	1	0	18.42	0.00	18.42	-4.58
				55990	3625.0	1	99		56107	3636.7	1	0	22.41	0.00	22.41	-0.59
				56640	3690.0	1	0		56523	3678.3	1	24	18.43	0.00	18.43	-4.57
				55990	3625	100	0		56107	3636.7	25	0	19.46	0.00	19.46	-3.54
			16-QAM	55990	3625	100	0	16-QAM	56107	3636.7	25	0	19.38	0.00	19.38	-3.62
				55990	3625	100	0		56107	3636.7	25	0	19.41	0.00	19.41	-3.59
				55990	3625	100	0		56107	3636.7	25	0	19.34	0.00	19.34	-3.66
				55990	3625	100	0		56107	3636.7	25	0	19.34	0.00	19.34	-3.66
Max	LTE B48	20MHz + 10MHz	QPSK	55340	3560.0	1	99	QPSK	55484	3574.4	1	0	22.3	0.00	22.30	-0.70
				55990	3625.0	1	99		56134	3639.4	1	0	17.68	0.00	17.68	-5.32
				56640	3690.0	1	0		56496	3675.6	1	49	17.39	0.00	17.39	-5.61
				55340	3560	100	0		55484	3574.4	50	0	18.86	0.00	18.86	-4.14
			16-QAM	55340	3560	100	0	16-QAM	55484	3574.4	50	0	18.78	0.00	18.78	-4.22
				55340	3560	100	0		55484	3574.4	50	0	18.81	0.00	18.81	-4.19
				55340	3560	100	0		55484	3574.4	50	0	18.75	0.00	18.75	-4.25
				55340	3560.0	1	99		55511	3577.1	1	0	17.39	0.00	17.39	-5.61
Max	LTE B48	20MHz + 15MHz	QPSK	55990	3625.0	1	99	QPSK	56161	3642.1	1	0	22.38	0.00	22.38	-0.62
				56640	3690.0	1	0		56469	3672.9	1	74	17.34	0.00	17.34	-5.66
				55990	3625	100	0		56161	3642.1	75	0	18.85	0.00	18.85	-4.15
				55990	3625	100	0		56161	3642.1	75	0	18.75	0.00	18.75	-4.25
			16-QAM	55990	3625	100	0	16-QAM	56161	3642.1	75	0	18.69	0.00	18.69	-4.31
				55990	3625	100	0		56161	3642.1	75	0	18.58	0.00	18.58	-4.42
				55340	3560.0	1	99		55538	3579.8	1	0	18.78	0.00	18.78	-4.22
				55990	3625.0	1	99		56188	3644.8	1	0	18.77	0.00	18.77	-4.23
Max	LTE B48	20MHz + 20MHz	QPSK	56640	3690.0	1	0	QPSK	56442	3670.2	1	99	22.41	0.00	22.41	-0.59
				55990	3625	100	0		56442	3670.2	100	0	18.96	0.00	18.96	-4.04
				55990	3625	100	0		56442	3670.2	100	0	18.86	0.00	18.86	-4.14
				55990	3625	100	0		56442	3670.2	100	0	18.75	0.00	18.75	-4.25
			16-QAM	55990	3625	100	0	16-QAM	56442	3670.2	100	0	18.81	0.00	18.81	-4.19
				55990	3625	100	0		56442	3670.2	100	0	18.81	0.00	18.81	-4.19
				55990	3625	100	0		56442	3670.2	100	0	18.81	0.00	18.81	-4.19
				55990	3625	100	0		56442	3670.2	100	0	18.81	0.00	18.81	-4.19

Table 7-12. EIRP Data (ULCA LTE Band 48)

FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device
		Page 115 of 139

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.7 Radiated Spurious Emissions

§2.1053 §96.41(e)

Test Overview

Radiated spurious emissions measurements are performed using the field strength conversion method described in KDB 971168 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized broadband hybrid antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed while the EUT is operating at maximum power and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

ANSI C63.26-2015

TIA-603-E-2016 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq 2 \times$ span / RBW
5. Detector = RMS
6. Trace mode = Max Hold (In cases where the level is within 2dB of the limit, the final measurement is taken using triggering/gating and trace averaging.)
7. The trace was allowed to stabilize

FCC ID: BCGA3267		PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device	Page 116 of 139

V2.2 09/07/2023

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

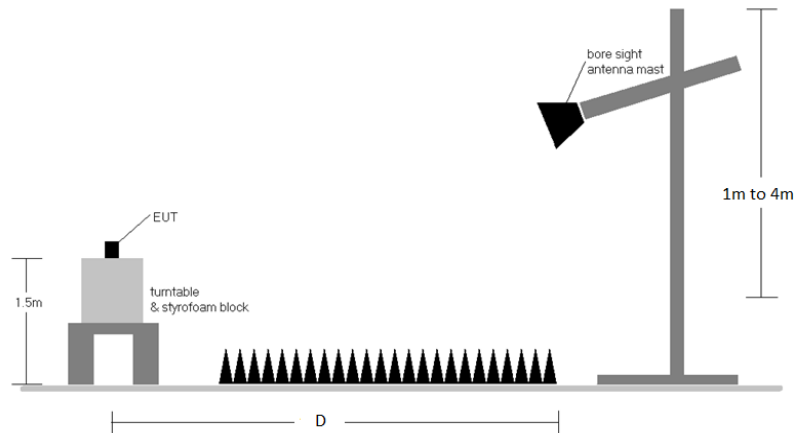


Figure 7-11. Test Instrument & Measurement Setup

Test Notes


- Field strengths are calculated using the Measurement quantity conversions in KDB 971168 D01 v03r01 Section 5.8.4.
 - $E(\text{dB}\mu\text{V/m}) = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$
 - $\text{EIRP (dBm)} = E(\text{dB}\mu\text{V/m}) + 20\log D - 104.8$; where D is the measurement distance in meters.
- The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below. 1RB config was found and reported as a worst case RB size.
- This unit was tested with its standard battery.
- The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- No significant emissions were found for below 1GHz measurement.
- Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- The "-" shown in the following RSE tables are used to denote a noise floor measurement.
- For pre-scans 1-18GHz, the RBW is set to 1MHz and VBW to 30kHz. For final measurements above 1GHz, the RBW is set to 1MHz and VBW to 3MHz when measuring with an RMS detector and max hold trace.
- Uplink carrier aggregation intra-band radiated spurious emissions measurements were evaluated for the two contiguous channels using various combinations of RB size, RB offset, modulation, and channel bandwidth. The worst case (highest) emissions were found while operating with QPSK modulation with both carriers set to transmit using 1RB.

FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device
		Page 117 of 139


V2.2 09/07/2023

7.7.1 Antenna 3b Radiated Spurious Emissions Measurements

LTE Band 48

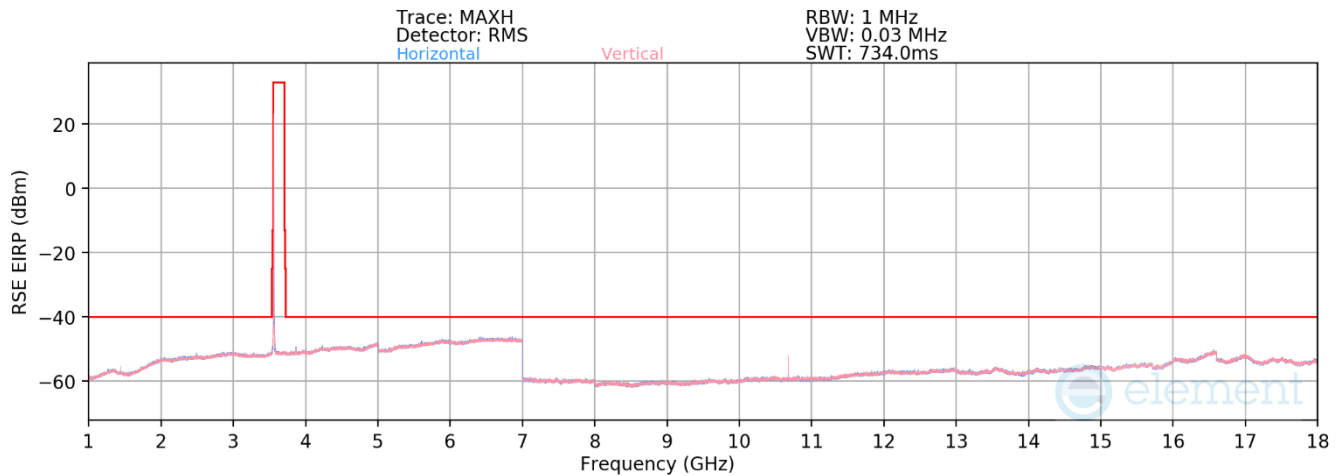

Plot 7-162. Radiated Spurious Plot 1 – 18GHz (LTE Band 48)

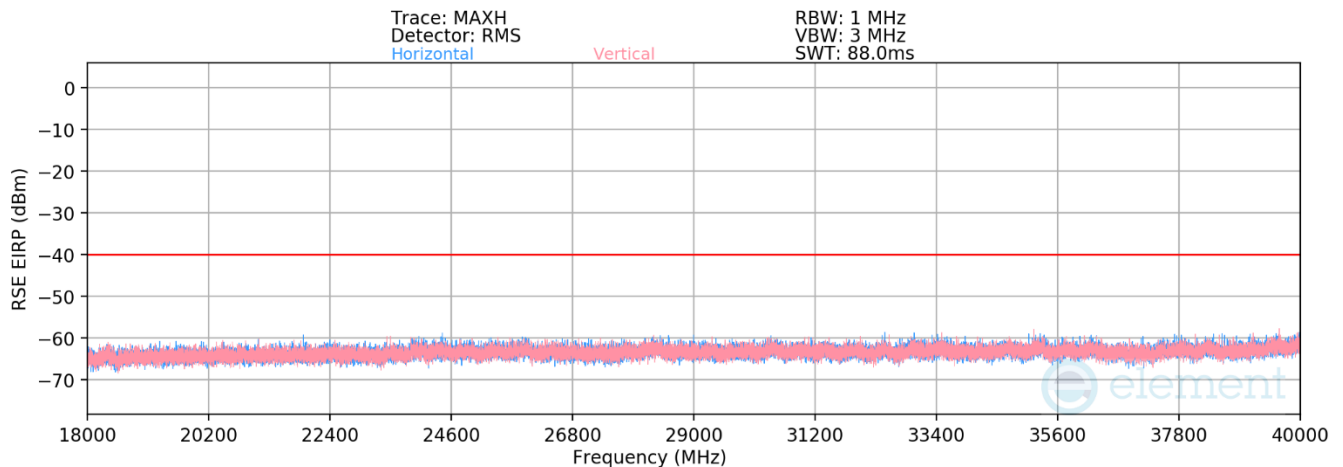

Plot 7-163. Radiated Spurious Plot 18 – 40GHz (LTE Band 48)

FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device
		Page 118 of 139

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Bandwidth (MHz):	20
Frequency (MHz):	3560.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7120.0	V	-	-	-78.75	6.68	34.94	-60.32	-40.00	-20.32
10680.0	V	100	144	-73.16	8.31	42.15	-53.11	-40.00	-13.11
14240.0	V	-	-	-82.61	13.70	38.09	-57.17	-40.00	-17.17
17800.0	V	-	-	-83.89	17.72	40.84	-54.42	-40.00	-14.42

Table 7-13. Radiated Spurious Data (LTE Band 48 – Low Channel)

Bandwidth (MHz):	20
Frequency (MHz):	3625.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7250.0	V	-	-	-78.63	6.48	34.85	-60.41	-40.00	-20.41
10875.0	V	240	141	-77.44	9.25	38.81	-56.44	-40.00	-16.44
14500.0	V	-	-	-82.98	13.74	37.76	-57.50	-40.00	-17.50

Table 7-14. Radiated Spurious Data (LTE Band 48 – Mid Channel)

Bandwidth (MHz):	20
Frequency (MHz):	3690.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 50


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7380.0	V	-	-	-78.27	6.05	34.79	-60.47	-40.00	-20.47
11070.0	V	-	-	-80.15	8.85	35.70	-59.56	-40.00	-19.56
14760.0	V	-	-	-82.86	14.74	38.88	-56.38	-40.00	-16.38

Table 7-15. Radiated Spurious Data (LTE Band 48 – High Channel)


FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device
		Page 119 of 139

V2.2 09/07/2023

ULCA LTE Band 48

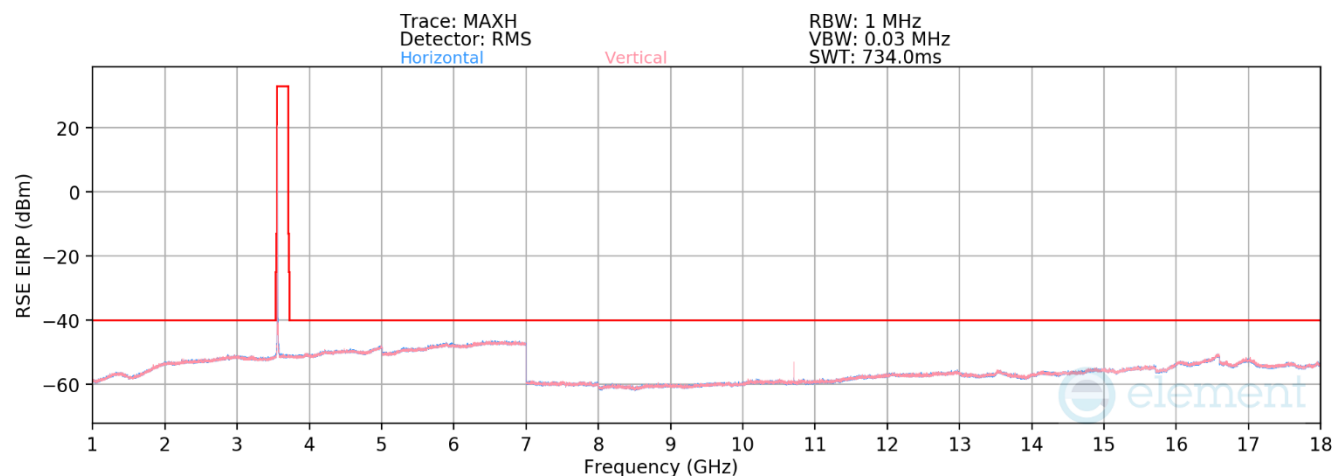

Plot 7-164. Radiated Spurious Plot 1 – 18GHz (ULCA LTE Band 48)

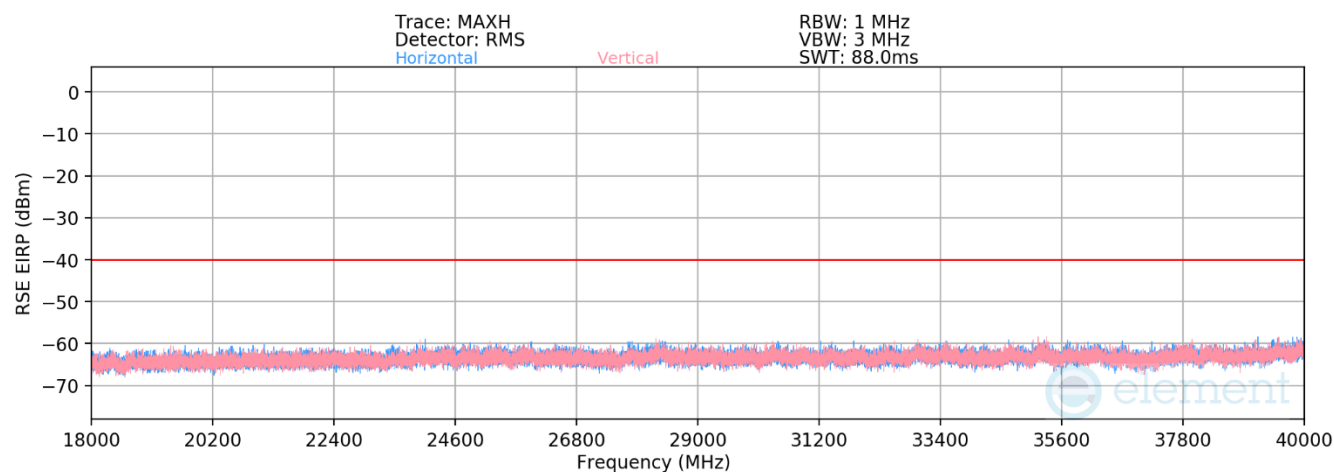

Plot 7-165. Radiated Spurious Plot 18 – 40GHz (ULCA LTE Band 48)

FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device
		Page 120 of 139

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3560.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3579.8
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7120.0	V	288	73	-77.86	6.65	35.79	-59.47	-40.00	-19.47
10680.0	V	100	142	-68.44	8.64	47.21	-48.05	-40.00	-8.05
14240.0	V	-	-	-82.66	13.54	37.88	-57.38	-40.00	-17.38
17800.0	H	-	-	-83.64	17.68	41.04	-54.22	-40.00	-14.22

Table 7-16. Radiated Spurious Data (ULCA LTE Band 48– Low Channel)

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3625.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3644.8
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7250.0	V	344	307	-77.21	6.57	36.36	-58.90	-40.00	-18.90
10875.0	V	297	27	-75.90	9.44	40.54	-54.71	-40.00	-14.71
14500.0	V	-	-	-82.45	13.76	38.31	-56.95	-40.00	-16.95

Table 7-17. Radiated Spurious Data (ULCA LTE Band 48– Mid Channel)

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3690.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3670.2
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7380.0	V	254	198	-76.93	6.14	36.21	-59.05	-40.00	-19.05
11070.0	V	100	115	-76.08	9.01	39.92	-55.33	-40.00	-15.33
14760.0	H	-	-	-83.29	14.57	38.28	-56.97	-40.00	-16.97

Table 7-18. Radiated Spurious Data (ULCA LTE Band 48– High Channel)

FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device
		Page 121 of 139

V2.2 09/07/2023

NR Band n48

Bandwidth (MHz):	40
Frequency (MHz):	3570.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7120.0	H	-	-	-78.96	6.65	34.69	-60.57	-40.00	-20.57
10680.0	H	-	-	-80.57	8.64	35.08	-60.18	-40.00	-20.18
14240.0	V	-	-	-82.95	13.56	37.61	-57.64	-40.00	-17.64

Table 7-19. Radiated Spurious Data (NR Band n48 – Low Channel)

Bandwidth (MHz):	40
Frequency (MHz):	3625.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7250.0	V	-	-	-79.06	6.57	34.52	-60.74	-40.00	-20.74
10875.0	H	-	-	-80.41	9.25	35.84	-59.42	-40.00	-19.42
14500.0	H	-	-	-83.33	13.89	37.56	-57.70	-40.00	-17.70

Table 7-20. Radiated Spurious Data (NR Band n48 – Mid Channel)

Bandwidth (MHz):	40
Frequency (MHz):	3680.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7380.0	V	-	-	-78.53	6.16	34.63	-60.63	-40.00	-20.63
11070.0	V	-	-	-80.41	9.02	35.61	-59.65	-40.00	-19.65
14760.0	H	-	-	-83.46	14.57	38.12	-57.14	-40.00	-17.14

Table 7-21. Radiated Spurious Data (NR Band n48 – High Channel)

FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device
		Page 122 of 139

V2.2 09/07/2023

7.7.2 Antenna 2a Radiated Spurious Emissions Measurements

LTE Band 48

Bandwidth (MHz):	20
Frequency (MHz):	3560.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7120.0	V	276	17	-77.59	6.59	36.01	-59.25	-40.00	-19.25
10680.0	H	-	-	-80.00	8.44	35.44	-59.81	-40.00	-19.81
14240.0	H	-	-	-82.37	13.70	38.33	-56.93	-40.00	-16.93
17800.0	H	-	-	-83.77	17.72	40.95	-54.31	-40.00	-14.31

Table 7-22. Radiated Spurious Data (LTE Band 48 – Low Channel)

Bandwidth (MHz):	20
Frequency (MHz):	3625.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7250.0	V	-	-	-78.68	6.57	34.89	-60.37	-40.00	-20.37
10875.0	H	-	-	-80.49	9.08	35.58	-59.67	-40.00	-19.67
14500.0	V	-	-	-82.80	13.80	38.00	-57.25	-40.00	-17.25

Table 7-23. Radiated Spurious Data (LTE Band 48 – Mid Channel)

Bandwidth (MHz):	20
Frequency (MHz):	3690.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7380.0	H	-	-	-78.16	6.05	34.89	-60.37	-40.00	-20.37
11070.0	V	-	-	-80.24	9.02	35.78	-59.48	-40.00	-19.48
14760.0	V	-	-	-82.94	14.84	38.90	-56.36	-40.00	-16.36

Table 7-24. Radiated Spurious Data (LTE Band 48 – High Channel)

FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device
		Page 123 of 139

V2.2 09/07/2023

ULCA LTE Band 48

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3560.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3579.8
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7120.0	V	266	12	-77.98	6.65	35.66	-59.59	-40.00	-19.59
10680.0	H	-	-	-79.92	8.31	35.39	-59.87	-40.00	-19.87
14240.0	H	-	-	-82.49	13.44	37.95	-57.31	-40.00	-17.31
17800.0	H	-	-	-83.88	17.68	40.80	-54.45	-40.00	-14.45

Table 7-25. Radiated Spurious Data (ULCA LTE Band 48– Low Channel)

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3625.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3644.8
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7250.0	H	-	-	-78.55	6.33	34.78	-60.48	-40.00	-20.48
10875.0	V	-	-	-80.60	9.44	35.84	-59.42	-40.00	-19.42
14500.0	H	-	-	-82.56	13.63	38.07	-57.19	-40.00	-17.19

Table 7-26. Radiated Spurious Data (ULCA LTE Band 48– Mid Channel)

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3690.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3670.2
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7380.0	V	-	-	-78.40	6.14	34.73	-60.52	-40.00	-20.52
11070.0	V	-	-	-80.39	9.02	35.63	-59.63	-40.00	-19.63
14760.0	V	-	-	-82.75	14.37	38.61	-56.64	-40.00	-16.64

Table 7-27. Radiated Spurious Data (ULCA LTE Band 48– High Channel)

FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device
		Page 124 of 139

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

NR Band n48

Bandwidth (MHz):	40
Frequency (MHz):	3570.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7120.0	V	-	-	-78.94	6.69	34.75	-60.51	-40.00	-20.51
10680.0	H	-	-	-80.33	8.56	35.23	-60.03	-40.00	-20.03
14240.0	V	-	-	-83.10	13.56	37.46	-57.80	-40.00	-17.80

Table 7-28. Radiated Spurious Data (NR Band n48 – Low Channel)

Bandwidth (MHz):	40
Frequency (MHz):	3625.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7250.0	H	-	-	-78.81	6.48	34.67	-60.59	-40.00	-20.59
10875.0	H	-	-	-80.52	9.25	35.73	-59.53	-40.00	-19.53
14500.0	H	-	-	-83.34	13.89	37.54	-57.71	-40.00	-17.71

Table 7-29. Radiated Spurious Data (NR Band n48 – Mid Channel)

Bandwidth (MHz):	40
Frequency (MHz):	3680.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7380.0	H	-	-	-78.56	6.16	34.60	-60.66	-40.00	-20.66
11070.0	V	-	-	-80.35	9.01	35.66	-59.60	-40.00	-19.60
14760.0	H	-	-	-82.96	14.37	38.41	-56.85	-40.00	-16.85

Table 7-30. Radiated Spurious Data (NR Band n48 – High Channel)

FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device
		Page 125 of 139

V2.2 09/07/2023

7.7.3 Antenna 4 Radiated Spurious Emissions Measurements

LTE Band 48

Bandwidth (MHz):	20
Frequency (MHz):	3560.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7120.0	V	-	-	-78.22	6.59	35.37	-59.89	-40.00	-19.89
10680.0	V	-	-	-79.66	8.78	36.12	-59.13	-40.00	-19.13
14240.0	V	-	-	-82.46	13.52	38.06	-57.20	-40.00	-17.20

Table 7-31. Radiated Spurious Data (LTE Band 48 – Low Channel)

Bandwidth (MHz):	20
Frequency (MHz):	3625.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7250.0	V	-	-	-78.74	6.57	34.83	-60.42	-40.00	-20.42
10875.0	H	-	-	-80.13	9.17	36.04	-59.21	-40.00	-19.21
14500.0	H	-	-	-82.96	13.70	37.73	-57.52	-40.00	-17.52

Table 7-32. Radiated Spurious Data (LTE Band 48 – Mid Channel)

Bandwidth (MHz):	20
Frequency (MHz):	3690.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7380.0	V	-	-	-78.37	6.05	34.68	-60.57	-40.00	-20.57
11070.0	H	-	-	-80.20	8.85	35.65	-59.61	-40.00	-19.61
14760.0	V	-	-	-82.92	14.84	38.92	-56.34	-40.00	-16.34

Table 7-33. Radiated Spurious Data (LTE Band 48 – High Channel)

FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device
		Page 126 of 139

V2.2 09/07/2023

ULCA LTE Band 48

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3560.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3579.8
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7120.0	H	-	-	-78.60	6.59	35.00	-60.26	-40.00	-20.26
10680.0	V	-	-	-80.04	8.42	35.38	-59.87	-40.00	-19.87
14240.0	V	-	-	-82.41	13.51	38.10	-57.16	-40.00	-17.16

Table 7-34. Radiated Spurious Data (ULCA LTE Band 48– Low Channel)

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3625.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3644.8
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7250.0	H	-	-	-78.78	6.48	34.70	-60.56	-40.00	-20.56
10875.0	H	-	-	-80.45	9.44	35.99	-59.27	-40.00	-19.27
14500.0	H	-	-	-82.59	13.76	38.17	-57.09	-40.00	-17.09

Table 7-35. Radiated Spurious Data (ULCA LTE Band 48– Mid Channel)

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3690.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3670.2
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7380.0	H	-	-	-78.76	6.48	34.72	-60.53	-40.00	-20.53
11070.0	V	-	-	-80.24	9.17	35.93	-59.33	-40.00	-19.33
14760.0	V	-	-	-82.95	13.81	37.86	-57.40	-40.00	-17.40

Table 7-36. Radiated Spurious Data (ULCA LTE Band 48– High Channel)


FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device
		Page 127 of 139

V2.2 09/07/2023

NR Band n48

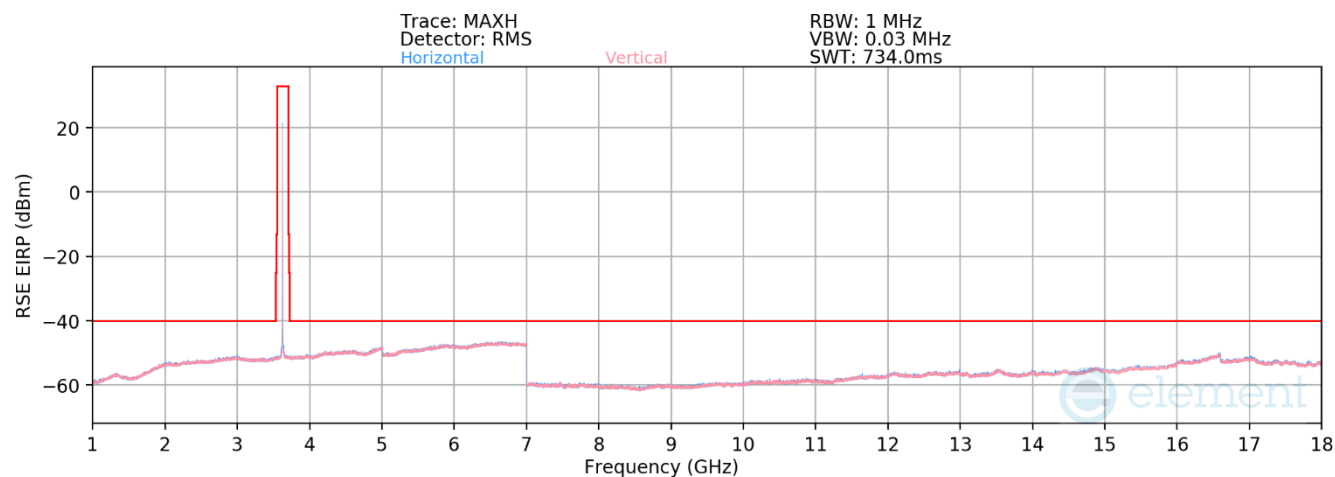

Plot 7-166. Radiated Spurious Plot 1 – 18GHz (NR Band n48)

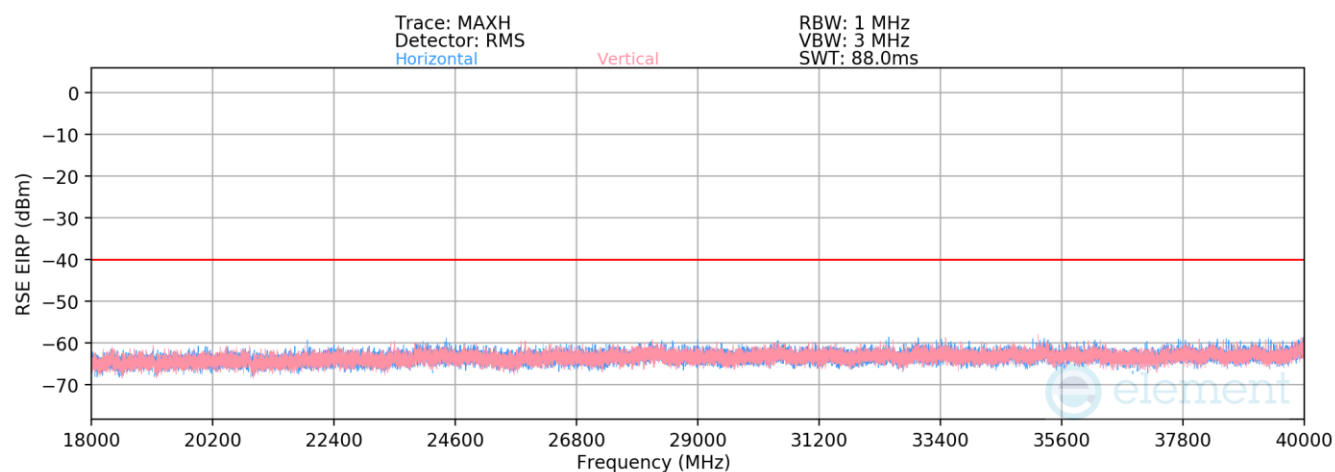

Plot 7-167. Radiated Spurious Plot 18 – 40GHz (NR Band n48)

FCC ID: BCGA3267		PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device	Page 128 of 139

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Bandwidth (MHz):	40
Frequency (MHz):	3570.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7120.0	H	-	-	-79.10	6.69	34.59	-60.67	-40.00	-20.67
10680.0	V	-	-	-79.95	8.42	35.47	-59.79	-40.00	-19.79
14240.0	V	-	-	-84.08	13.56	36.48	-58.78	-40.00	-18.78

Table 7-37. Radiated Spurious Data (NR Band n48 – Low Channel)

Bandwidth (MHz):	40
Frequency (MHz):	3625.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7250.0	H	-	-	-78.98	6.57	34.60	-60.66	-40.00	-20.66
10875.0	V	-	-	-80.55	9.25	35.70	-59.56	-40.00	-19.56
14500.0	V	-	-	-83.59	13.74	37.15	-58.11	-40.00	-18.11

Table 7-38. Radiated Spurious Data (NR Band n48 – Mid Channel)

Bandwidth (MHz):	40
Frequency (MHz):	3680.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7380.0	H	-	-	-78.60	6.05	34.45	-60.81	-40.00	-20.81
11070.0	V	-	-	-80.75	9.01	35.26	-60.00	-40.00	-20.00
14760.0	V	-	-	-83.76	14.57	37.81	-57.45	-40.00	-17.45

Table 7-39. Radiated Spurious Data (NR Band n48 – High Channel)

FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device
		Page 129 of 139

V2.2 09/07/2023

7.7.4 Antenna 1a Radiated Spurious Emissions Measurements

LTE Band 48

Bandwidth (MHz):	20
Frequency (MHz):	3560.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7120.0	H	-	-	-78.59	6.59	35.01	-60.25	-40.00	-20.25
10680.0	H	-	-	-79.88	8.42	35.54	-59.72	-40.00	-19.72
14240.0	V	-	-	-82.43	13.54	38.11	-57.15	-40.00	-17.15

Table 7-40. Radiated Spurious Data (LTE Band 48 – Low Channel)

Bandwidth (MHz):	20
Frequency (MHz):	3625.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7250.0	H	-	-	-78.83	6.57	34.74	-60.52	-40.00	-20.52
10875.0	H	-	-	-80.35	9.44	36.09	-59.16	-40.00	-19.16
14500.0	H	-	-	-82.54	13.63	38.09	-57.17	-40.00	-17.17

Table 7-41. Radiated Spurious Data (LTE Band 48 – Mid Channel)

Bandwidth (MHz):	20
Frequency (MHz):	3690.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7380.0	H	-	-	-78.03	6.05	35.02	-60.24	-40.00	-20.24
11070.0	H	-	-	-80.31	9.02	35.70	-59.56	-40.00	-19.56
14760.0	V	-	-	-82.96	14.84	38.88	-56.38	-40.00	-16.38

Table 7-42. Radiated Spurious Data (LTE Band 48 – High Channel)

FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device
		Page 130 of 139

V2.2 09/07/2023

ULCA LTE Band 48

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3560.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3579.8
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7120.0	H	-	-	-78.68	6.56	34.88	-60.38	-40.00	-20.38
10680.0	V	-	-	-80.30	8.64	35.34	-59.91	-40.00	-19.91
14240.0	H	-	-	-82.52	13.54	38.02	-57.23	-40.00	-17.23

Table 7-43. Radiated Spurious Data (ULCA LTE Band 48– Low Channel)

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3625.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3644.8
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7250.0	V	-	-	-78.61	6.57	34.97	-60.29	-40.00	-20.29
10875.0	H	-	-	-80.65	9.44	35.79	-59.47	-40.00	-19.47
14500.0	H	-	-	-82.56	13.76	38.20	-57.06	-40.00	-17.06

Table 7-44. Radiated Spurious Data (ULCA LTE Band 48– Mid Channel)

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3690.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3670.2
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7380.0	H	-	-	-78.58	6.26	34.67	-60.58	-40.00	-20.58
11070.0	H	-	-	-80.39	9.01	35.62	-59.64	-40.00	-19.64
14760.0	H	-	-	-83.00	14.37	38.37	-56.89	-40.00	-16.89

Table 7-45. Radiated Spurious Data (ULCA LTE Band 48– High Channel)

FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device
		Page 131 of 139

V2.2 09/07/2023

NR Band n48

Bandwidth (MHz):	40
Frequency (MHz):	3570.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7120.0	H	-	-	-79.02	6.65	34.63	-60.62	-40.00	-20.62
10680.0	V	-	-	-80.46	8.56	35.10	-60.16	-40.00	-20.16
14240.0	V	-	-	-83.43	13.56	37.13	-58.12	-40.00	-18.12

Table 7-46. Radiated Spurious Data (NR Band n48 – Low Channel)

Bandwidth (MHz):	40
Frequency (MHz):	3625.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7250.0	H	-	-	-78.80	6.33	34.53	-60.73	-40.00	-20.73
10875.0	V	-	-	-80.40	9.16	35.76	-59.50	-40.00	-19.50
14500.0	V	-	-	-83.45	13.74	37.29	-57.97	-40.00	-17.97

Table 7-47. Radiated Spurious Data (NR Band n48 – Mid Channel)

Bandwidth (MHz):	40
Frequency (MHz):	3680.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7380.0	V	-	-	-78.64	6.05	34.41	-60.85	-40.00	-20.85
11070.0	H	-	-	-80.74	8.99	35.25	-60.00	-40.00	-20.00
14760.0	H	-	-	-83.67	14.57	37.90	-57.36	-40.00	-17.36

Table 7-48. Radiated Spurious Data (NR Band n48 – High Channel)

FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device
		Page 132 of 139

V2.2 09/07/2023

7.8 Frequency Stability / Temperature Variation

§2.1055

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015 and TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 96, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure Used

ANSI C63.26-2015

TIA-603-E-2016

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

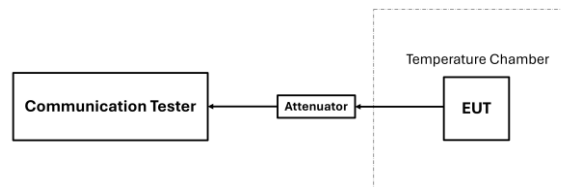


Figure 7-12. LTE Test Instrument & Measurement Setup




Figure 7-13. FR1 Test Instrument & Measurement Setup

Test Notes

All ports were tested and only the worst case data were reported.

FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device
		Page 133 of 139

V2.2 09/07/2023

Frequency Stability / Temperature Variation

LTE Band 48				
		Operating Band Lower Boundary (GHz)	3.550	
		Ref. Voltage (VDC):	3.80	
Voltage (%)	Power (VDC)	Temp (°C)	Measured Freq. (GHz)	Freq. Delta from Operating Range (GHz)
100 %	3.80	- 30	3.55072704	-0.00072704
		- 20	3.55066452	-0.00066452
		- 10	3.55050822	-0.00050822
		0	3.55064013	-0.00064013
		+ 10	3.55022159	-0.00022159
		+ 20 (Ref)	3.55043801	-0.00043801
		+ 30	3.55052358	-0.00052358
		+ 40	3.55040543	-0.00040543
		+ 50	3.55006059	-0.00006059
Battery Endpoint	3.40	+ 20	3.55051575	-0.00051575

Table 49. LTE Band 48 Lower Boundary Frequency Stability Data

LTE Band 48				
		Operating Band Upper Boundary (GHz)	3.700	
		Ref. Voltage (VDC):	3.80	
Voltage (%)	Power (VDC)	Temp (°C)	Measured Freq. (GHz)	Freq. Delta from Operating Range (GHz)
100 %	3.80	- 30	3.69908111	-0.00091889
		- 20	3.69980017	-0.00019983
		- 10	3.69955017	-0.00044983
		0	3.69951475	-0.00048525
		+ 10	3.69921958	-0.00078042
		+ 20 (Ref)	3.69927337	-0.00072663
		+ 30	3.69977003	-0.00022997
		+ 40	3.69932520	-0.00067480
		+ 50	3.69919609	-0.00080391
Battery Endpoint	3.40	+ 20	3.69958591	-0.00041409

Table 50. LTE Band 48 Upper Boundary Frequency Stability Data

FCC ID: BCGA3267			PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device		Page 134 of 139

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Frequency Stability / Temperature Variation

NR Band n48				
		Operating Band Lower Boundary (GHz)	3.550	
		Ref. Voltage (VDC):	3.80	
Voltage (%)	Power (VDC)	Temp (°C)	Measured Freq. (GHz)	Freq. Delta from Operating Range (GHz)
100 %	3.80	- 30	3.55051427	-0.00051427
		- 20	3.55033921	-0.00033921
		- 10	3.55001147	-0.00001147
		0	3.55060273	-0.00060273
		+ 10	3.55053076	-0.00053076
		+ 20 (Ref)	3.55086313	-0.00086313
		+ 30	3.55026119	-0.00026119
		+ 40	3.55054640	-0.00054640
		+ 50	3.55072824	-0.00072824
Battery Endpoint	3.40	+ 20	3.55060993	-0.00060993

Table 51. NR Band n48 Lower Boundary Frequency Stability Data

NR Band n48				
		Operating Band Upper Boundary (GHz)	3.700	
		Ref. Voltage (VDC):	3.80	
Voltage (%)	Power (VDC)	Temp (°C)	Measured Freq. (GHz)	Freq. Delta from Operating Range (GHz)
100 %	3.80	- 30	3.69973270	-0.00026730
		- 20	3.69929245	-0.00070755
		- 10	3.69957383	-0.00042617
		0	3.69996731	-0.00003269
		+ 10	3.69948279	-0.00051721
		+ 20 (Ref)	3.69917912	-0.00082088
		+ 30	3.69979317	-0.00020683
		+ 40	3.69919369	-0.00080631
		+ 50	3.69964165	-0.00035835
Battery Endpoint	3.40	+ 20	3.69900788	-0.00099212

Table 52. NR Band n48 Upper Boundary Frequency Stability Data

FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device	Page 135 of 139

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.9 End User Device Additional Requirement (CBSD Protocol)

§96.47

Test Overview and Limit

End user device additional requirements (CBSD Protocol) are tested per the test procedures listed below. During testing, the EUT is connected to a certified CBSDs (AirSpan FCC ID(s): PIDAV1901 and PIDAV1500) as a companion device to show compliance with Part 96.47.

End User Devices may operate only if they can positively receive and decode an authorization signal transmitted by a CBSD, including the frequencies and power limits for their operation.

An End User Device must discontinue operations, change frequencies, or change its operational power level within 10 seconds of receiving instructions from its associated CBSD.

Test Procedure Used

KDB 940660 D01 v03

WINNF-TS-0122 v1.0.2

Test Setup/Method

The EUT was connected via an RF cable to a certified CBSD and spectrum analyzer. The following procedure is performed by applying WINNF-TS-0122 CBRS CBSD Test Specification.

1. Run#1:
 - a. Setup WINNF.PT.C.HBT.1 with 3615 – 3635MHz.
 - b. Enable AP service from Airspan Cloud Platform.
 - c. Check EUT Tx frequency.
 - d. Disable AP service from Airspan Cloud Platform and check EUT stop transmission within 10s.
2. Run#2:
 - a. Setup WINNF.PT.C.HBT.1 with 3615MHz – 3635MHz.
 - b. Enable AP service from Airspan Cloud Platform.
 - c. Check EUT Tx frequency.
 - d. Disable AP service from Airspan Cloud Platform and check EUT stop transmission within 10s.

Test Notes


The EUT is an End User Device.

FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device
		Page 136 of 139


V2.2 09/07/2023

Run#1 LTE-B48:

- Tx Frequency Set: 3615 – 3635MHz
- MaxEIRP Set: 10dBm/MHz

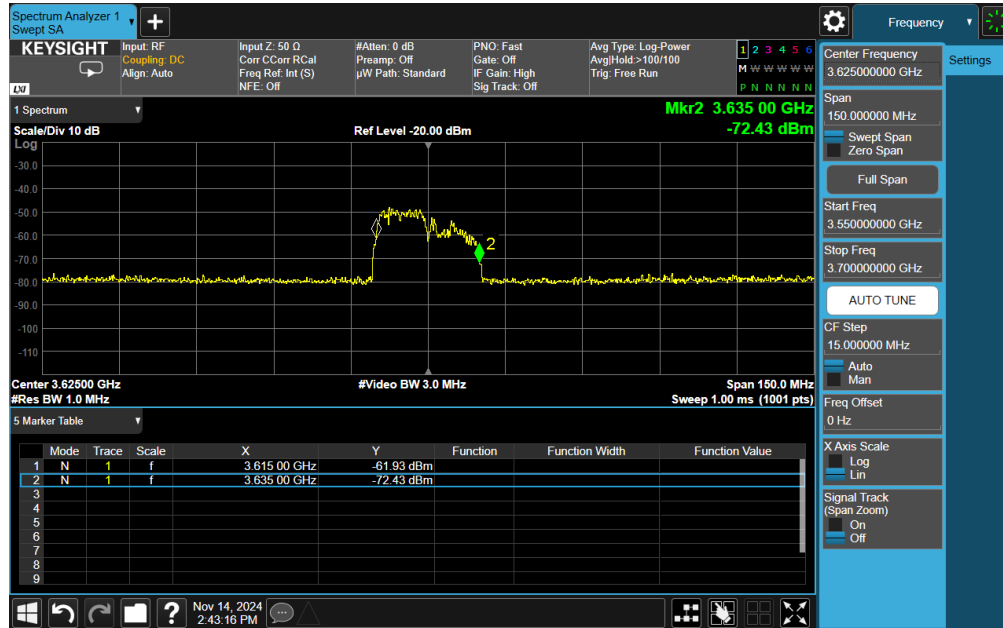

Plot 7-168. Run#1 End User Device Frequency of Operations

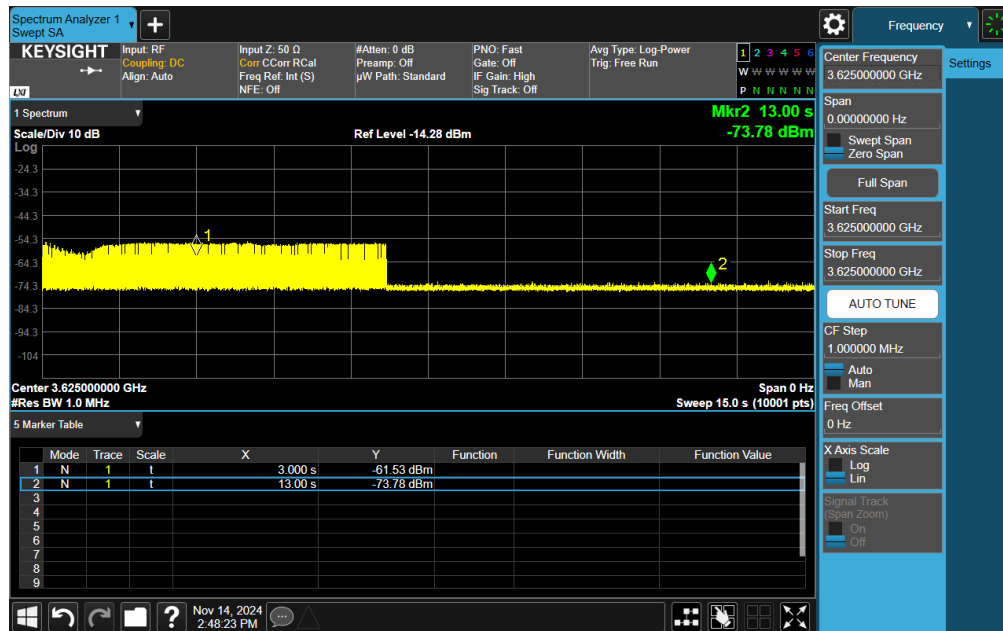

Plot 7-169. Run#1 End User Device Discontinues Operations within 10s

Note:

Marker 1: CBSD sends instructions to discontinue LTE operations.
 Marker 2: 10 seconds elapsed time from CBSD sending instructions to EUT.


FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device
		Page 137 of 139

V2.2 09/07/2023


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Run#2 FR1-n48:

- Tx Frequency Set: 3615 – 3635MHz
- MaxEIRP Set: 10dBm/MHz

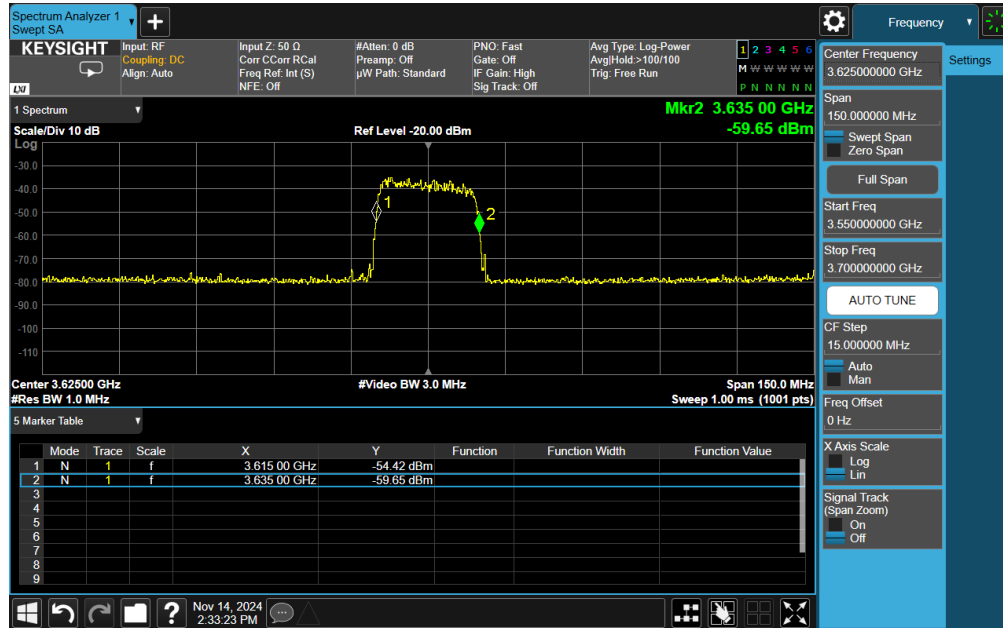

Plot 7-170. Run#2 End User Device Frequency of Operations

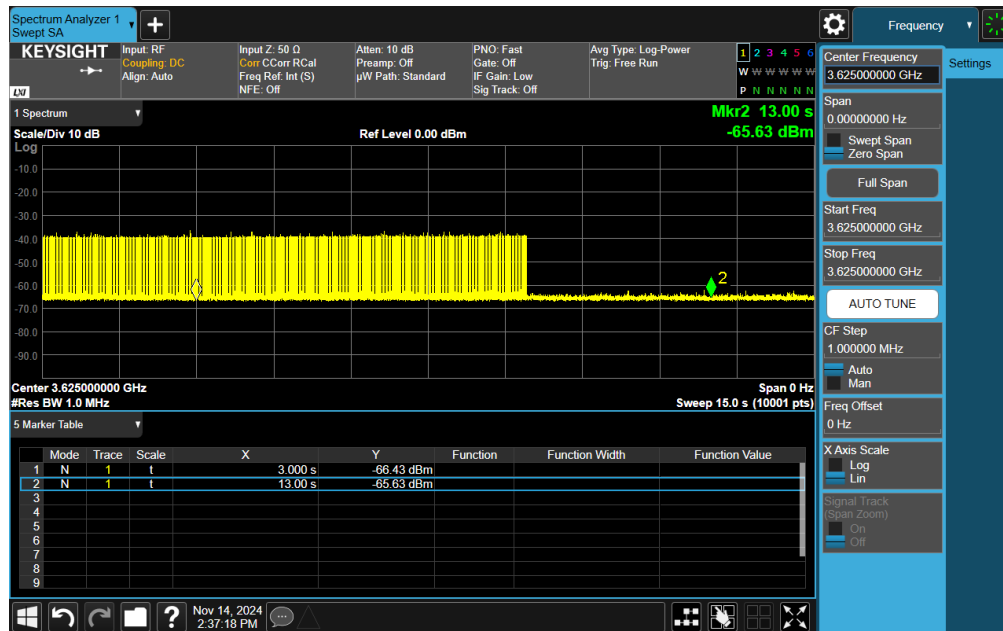

Plot 7-171. Run#2 End User Device Discontinues Operations within 10s

Note:

Marker 1: CBSD sends instructions to discontinue FR1 operations.
 Marker 2: 10 seconds elapsed time from CBSD sending instructions to EUT.

FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device
		Page 138 of 139

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the Apple **Tablet Device FCC ID: BCGA3267** complies with all the End User Device requirements of Part 96 of the FCC Rules.

FCC ID: BCGA3267	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210073-13-R1.BCG	Test Dates: 7/1/2024-12/25/2024	EUT Type: Tablet Device
		Page 139 of 139

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.