





Plot 7-65. 26dB & 99% Bandwidth Plot Antenna 1b (20MHz 802.11ax (UNII Band 7) – Ch. 181)

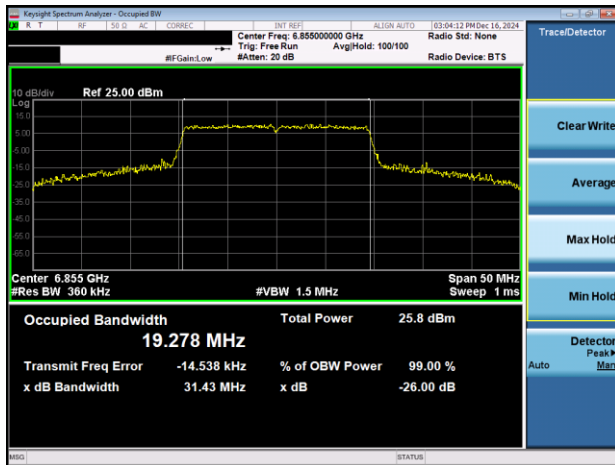

Plot 7-67. 26dB & 99% Bandwidth Plot Antenna 1b (80MHz 802.11ax (UNII Band 7) – Ch. 167)

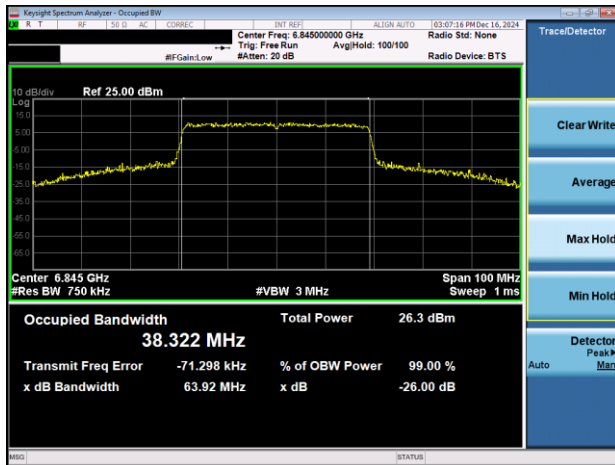

Plot 7-66. 26dB & 99% Bandwidth Plot Antenna 1b (40MHz 802.11ax (UNII Band 7) – Ch. 179)



Plot 7-68. 26dB & 99% Bandwidth Plot Antenna 1b (160MHz 802.11ax (UNII Band 7) – Ch. 143)

FCC ID: BCGA3267 IC: 579C-A3267		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210073-23.BCG	Test Dates: 10/25/2024 - 1/6/2025	EUT Type: Tablet Device	Page 40 of 262

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


7.2.6 Antenna 1b 26dB & 99% Bandwidth Measurements – LPI

	Frequency [MHz]	Channel	802.11 MODE	Data Rate [Mbps]	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]	Maximum Bandwidth Limit [MHz]	Pass / Fail
Band 5	5955	1	a	12.00	16.77	21.02	320	Pass
	6175	45	a	12.00	16.78	21.05	320	Pass
	6415	93	a	12.00	16.77	20.92	320	Pass
	5955	1	ax (20MHz)	135/143.4 (MCS11)	19.07	21.37	320	Pass
	6175	45	ax (20MHz)	135/143.4 (MCS11)	19.06	21.28	320	Pass
	6415	93	ax (20MHz)	24/25.8 (MCS2)	19.07	21.43	320	Pass
	5965	3	ax (40MHz)	271/286.8 (MCS11)	37.95	41.55	320	Pass
	6165	43	ax (40MHz)	49/51.6 (MCS2)	37.93	41.46	320	Pass
	6405	91	ax (40MHz)	98/103.2 (MCS4)	37.94	41.54	320	Pass
	5985	7	ax (80MHz)	102/108.1 (MCS2)	77.22	82.10	320	Pass
	6145	39	ax (80MHz)	204/216.2 (MCS4)	77.15	82.22	320	Pass
	6385	87	ax (80MHz)	102/108.1 (MCS2)	77.16	82.21	320	Pass
	6025	15	ax (160MHz)	367.5/432.4 (MCS4)	156.42	166.05	320	Pass
Band 6	6185	47	ax (160MHz)	367.5/432.4 (MCS4)	156.34	166.01	320	Pass
	6345	79	ax (160MHz)	183.8/216.2 (MCS2)	156.28	165.76	320	Pass
	6435	97	a	12.00	16.79	21.07	320	Pass
	6475	105	a	12.00	16.76	21.07	320	Pass
	6515	113	a	12.00	16.77	21.08	320	Pass
	6435	97	ax (20MHz)	135/143.4 (MCS11)	19.07	21.33	320	Pass
	6475	105	ax (20MHz)	49/51.6 (MCS4)	19.02	21.33	320	Pass
	6515	113	ax (20MHz)	49/51.6 (MCS4)	19.04	21.44	320	Pass
	6445	99	ax (40MHz)	49/51.6 (MCS2)	37.96	41.66	320	Pass
	6485	107	ax (40MHz)	49/51.6 (MCS2)	37.94	41.56	320	Pass
Band 7	6525	115	ax (40MHz)	49/51.6 (MCS2)	37.96	41.63	320	Pass
	6465	103	ax (80MHz)	102/108.1 (MCS2)	77.34	82.38	320	Pass
	6505	111	ax (160MHz)	1020.8/1201 (MCS11)	156.04	166.28	320	Pass
	6535	117	a	12.00	16.77	21.05	320	Pass
	6695	149	a	12.00	16.75	20.99	320	Pass
	6875	185	a	12.00	16.77	20.98	320	Pass
	6535	117	ax (20MHz)	24/25.8 (MCS2)	19.04	21.33	320	Pass
	6695	149	ax (20MHz)	24/25.8 (MCS2)	19.05	21.29	320	Pass
	6875	185	ax (20MHz)	49/51.6 (MCS4)	19.03	21.29	320	Pass
	6565	123	ax (40MHz)	49/51.6 (MCS2)	37.97	41.73	320	Pass
	6725	155	ax (40MHz)	98/103.2 (MCS4)	37.96	41.63	320	Pass
	6885	179	ax (40MHz)	49/51.6 (MCS2)	38.02	41.61	320	Pass
	6545	119	ax (80MHz)	102/108.1 (MCS2)	77.23	82.33	320	Pass
Band 8	6705	151	ax (80MHz)	102/108.1 (MCS2)	77.23	82.23	320	Pass
	6865	183	ax (80MHz)	102/108.1 (MCS2)	77.35	82.31	320	Pass
	6665	143	ax (160MHz)	1020.8/1201 (MCS11)	156.55	166.53	320	Pass
	6825	175	ax (160MHz)	1020.8/1201 (MCS11)	156.30	165.83	320	Pass
	6895	189	a	12.00	16.78	20.92	320	Pass
	6995	209	a	12.00	16.79	21.06	320	Pass
	7115	233	a	12.00	16.77	21.11	320	Pass
	6895	189	ax (20MHz)	49/51.6 (MCS4)	19.04	21.35	320	Pass
	6995	209	ax (20MHz)	135/143.4 (MCS11)	19.06	21.37	320	Pass
	7115	233	ax (20MHz)	24/25.8 (MCS2)	19.06	21.31	320	Pass
	6885	187	ax (40MHz)	49/51.6 (MCS2)	37.96	41.73	320	Pass
	7005	211	ax (40MHz)	98/103.2 (MCS4)	37.98	41.50	320	Pass
	7085	227	ax (40MHz)	49/51.6 (MCS2)	37.98	41.62	320	Pass
	6945	199	ax (80MHz)	102/108.1 (MCS2)	77.22	82.22	320	Pass
	7025	215	ax (80MHz)	102/108.1 (MCS2)	77.31	82.09	320	Pass
	6985	207	ax (160MHz)	1020.8/1201 (MCS11)	156.35	166.27	320	Pass


Table 7-7. Conducted Bandwidth Measurements Antenna 1b

FCC ID: BCGA3267 IC: 579C-A3267		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210073-23.BCG	Test Dates: 10/25/2024 - 1/6/2025	EUT Type: Tablet Device	Page 41 of 262


V 10.6 10/27/2023

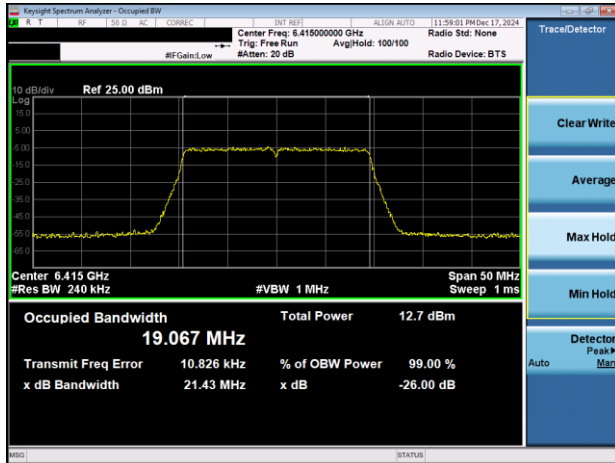

Plot 7-69. 26dB & 99% Bandwidth Plot Antenna 1b (20MHz 802.11ax (UNII Band 5) – Ch. 93)

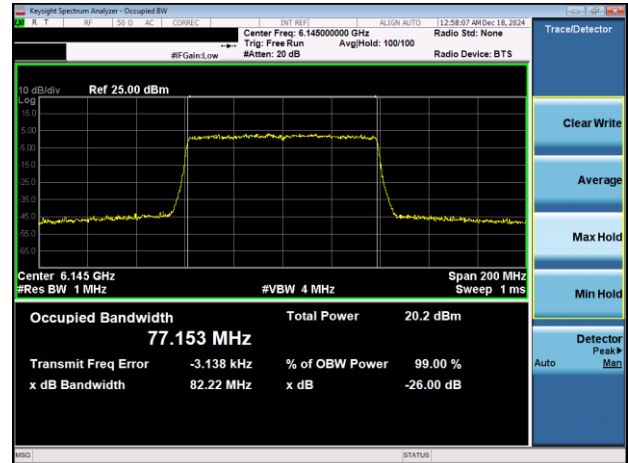

Plot 7-71. 26dB & 99% Bandwidth Plot Antenna 1b (80MHz 802.11ax (UNII Band 5) – Ch. 39)

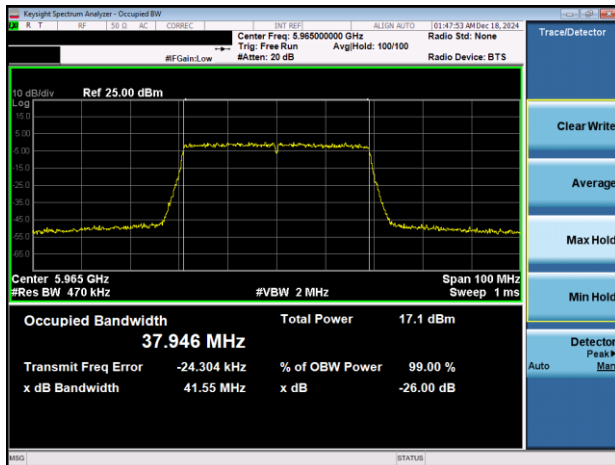


Plot 7-70. 26dB & 99% Bandwidth Plot Antenna 1b (40MHz 802.11ax (UNII Band 5) – Ch. 3)




Plot 7-72. 26dB & 99% Bandwidth Plot Antenna 1b (160MHz 802.11ax (UNII Band 5) – Ch. 15)


FCC ID: BCGA3267 IC: 579C-A3267		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210073-23.BCG	Test Dates: 10/25/2024 - 1/6/2025	EUT Type: Tablet Device	Page 42 of 262

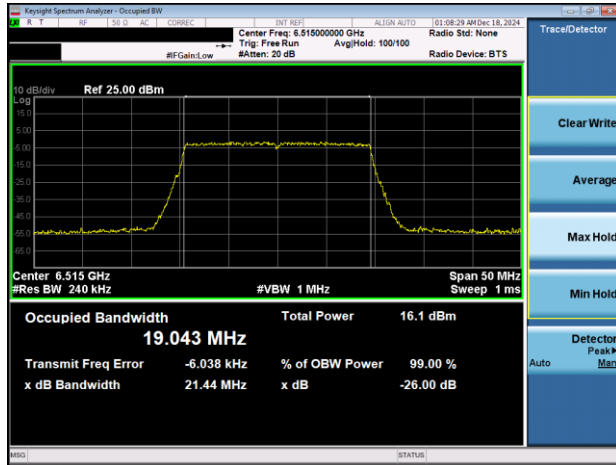

Plot 7-73. 26dB & 99% Bandwidth Plot Antenna 1b (20MHz 802.11ax (UNII Band 6) – Ch. 113)

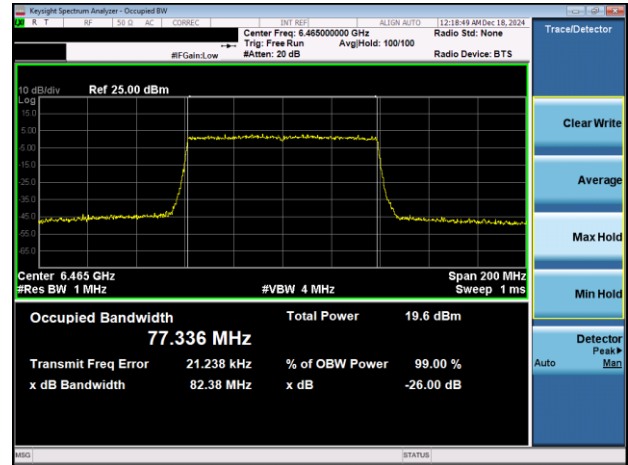

Plot 7-75. 26dB & 99% Bandwidth Plot Antenna 1b (80MHz 802.11ax (UNII Band 6) – Ch. 103)

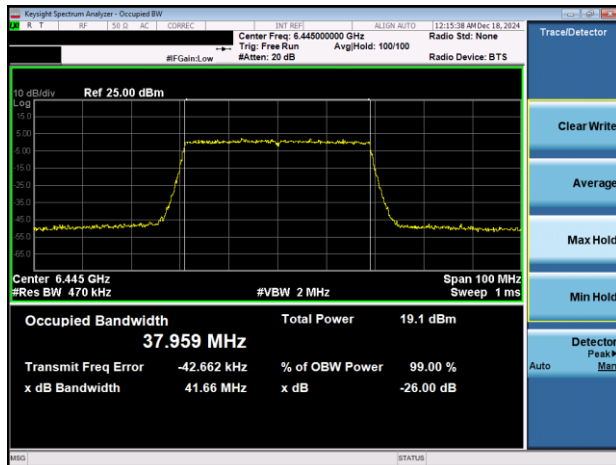


Plot 7-74. 26dB & 99% Bandwidth Plot Antenna 1b (40MHz 802.11ax (UNII Band 6) – Ch. 99)




Plot 7-76. 26dB & 99% Bandwidth Plot Antenna 1b (160MHz 802.11ax (UNII Band 6) – Ch. 111)


FCC ID: BCGA3267 IC: 579C-A3267		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210073-23.BCG	Test Dates: 10/25/2024 - 1/6/2025	EUT Type: Tablet Device	Page 43 of 262

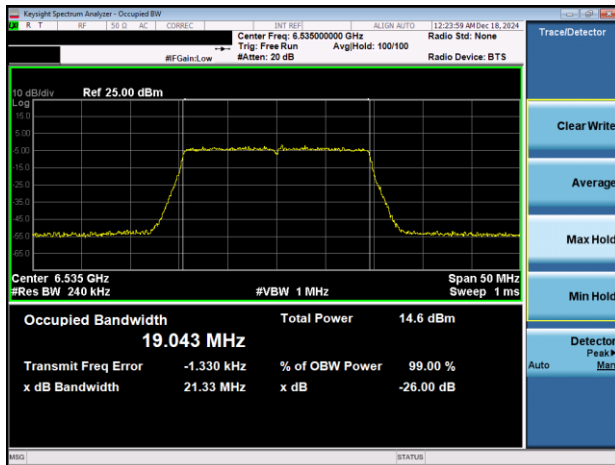


Plot 7-77. 26dB & 99% Bandwidth Plot Antenna 1b (20MHz 802.11ax (UNII Band 7) – Ch. 117)

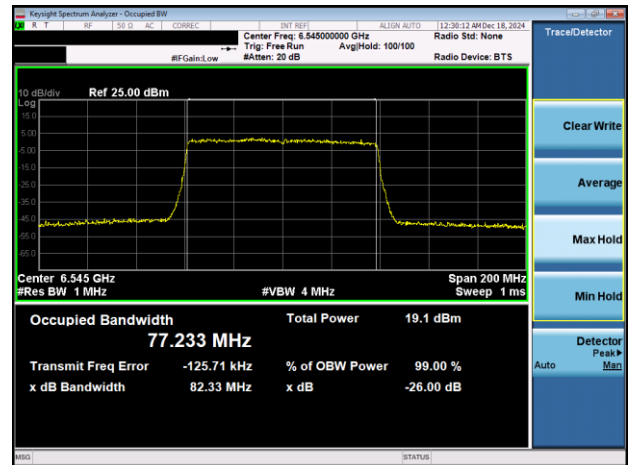

Plot 7-79. 26dB & 99% Bandwidth Plot Antenna 1b (80MHz 802.11ax (UNII Band 7) – Ch. 119)

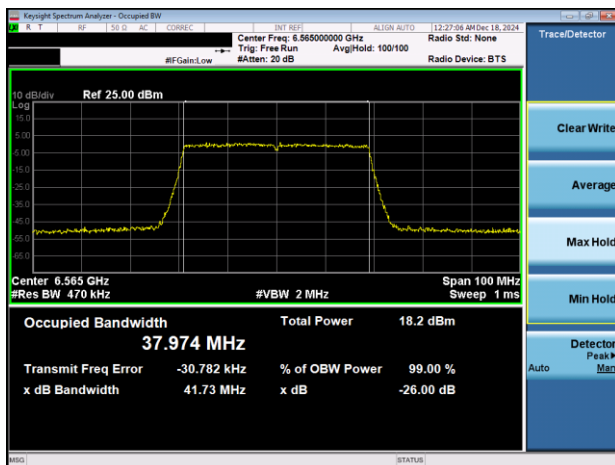

Plot 7-78. 26dB & 99% Bandwidth Plot Antenna 1b (40MHz 802.11ax (UNII Band 7) – Ch. 123)

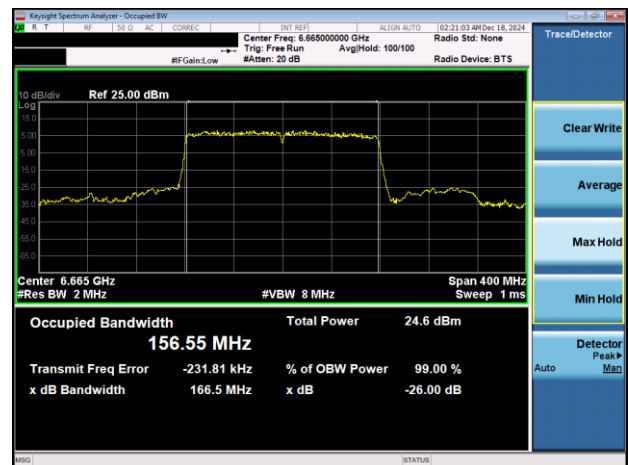


Plot 7-80. 26dB & 99% Bandwidth Plot Antenna 1b (160MHz 802.11ax (UNII Band 7) – Ch. 143)


FCC ID: BCGA3267 IC: 579C-A3267	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210073-23.BCG	Test Dates: 10/25/2024 - 1/6/2025	EUT Type: Tablet Device	Page 44 of 262

V 10.6 10/27/2023


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

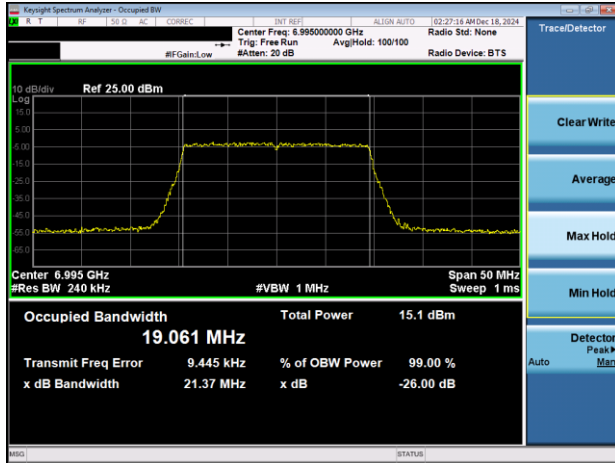


Plot 7-81. 26dB & 99% Bandwidth Plot Antenna 1b (20MHz 802.11ax (UNII Band 8) – Ch. 209)

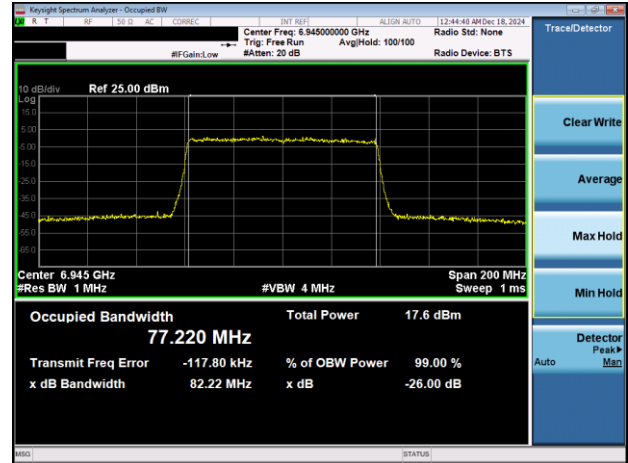

Plot 7-83. 26dB & 99% Bandwidth Plot Antenna 1b (80MHz 802.11ax (UNII Band 8) – Ch. 199)

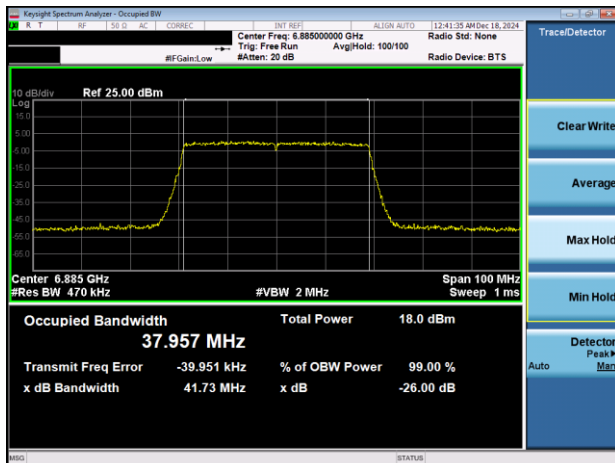

Plot 7-82. 26dB & 99% Bandwidth Plot Antenna 1b (40MHz 802.11ax (UNII Band 8) – Ch. 187)

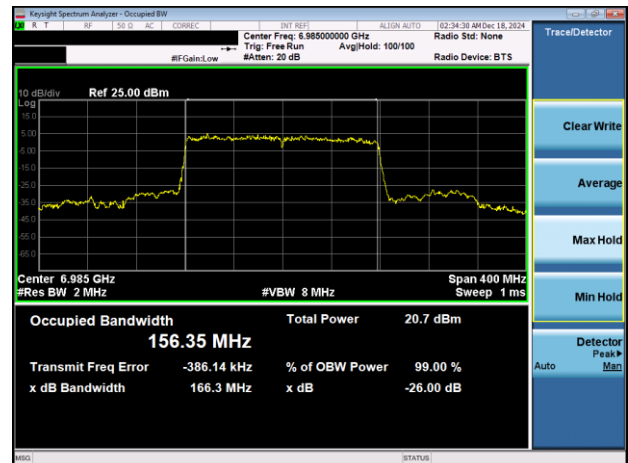

Plot 7-84. 26dB & 99% Bandwidth Plot Antenna 1b (160MHz 802.11ax (UNII Band 8) – Ch. 207)

FCC ID: BCGA3267 IC: 579C-A3267		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210073-23.BCG	Test Dates: 10/25/2024 - 1/6/2025	EUT Type: Tablet Device	Page 45 of 262

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.3 Conducted Output Power and Max EIRP Measurement

§15.407(a)(7)(8), RSS-248 [4.5.3], [4.5.5]

Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2020 and KDB 789033 D02 v02r01, and at the appropriate frequencies.

In the 5.925 – 7.125GHz band, the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm for Standard Power mode (SP), and 24dBm for Low Power Indoor mode (LPI).

Test Procedure Used

ANSI C63.10-2020 – Section 12.4.3.2 Method PM-G
KDB 789033 D02 v02r01 – Section E3)b) Method PM-G
ANSI C63.10-2020 – Section 14.4 Measure-and-Sum Technique
KDB 662911 v02r01 – Section E1) Measure-and-Sum Technique

Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup

Test Notes

None

FCC ID: BCGA3267 IC: 579C-A3267		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210073-23.BCG	Test Dates: 10/25/2024 - 1/6/2025	EUT Type: Tablet Device	Page 46 of 262

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.3.1 Antenna 3c Conducted Output Power Measurements – SP

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]		Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11a	802.11ax				
	5955	1	AVG	18.81	18.78	1.80	20.61	30.00	-9.39
	6175	45	AVG	18.70	18.65	1.80	20.50	30.00	-9.50
	6415	93	AVG	18.84	18.74	1.80	20.64	30.00	-9.36
	6435	97	AVG	18.82	18.86	2.10	20.96	30.00	-9.04
	6475	105	AVG	18.79	18.78	2.10	20.89	30.00	-9.11
	6515	113	AVG	18.85	18.82	2.10	20.95	30.00	-9.05
	6535	117	AVG	18.98	18.91	3.00	21.98	30.00	-8.02
	6695	149	AVG	18.87	18.84	3.00	21.87	30.00	-8.13
	6855	181	AVG	18.82	18.78	3.00	21.82	30.00	-8.18

Table 7-8. Antenna 3c 20MHz BW 802.11a/ax(SU) (UNII) Maximum Conducted Output Power – Standard Power

6GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5965	3	AVG	18.92	1.80	20.72	30.00	-9.28
	6165	43	AVG	18.78	1.80	20.58	30.00	-9.42
	6405	91	AVG	18.88	1.80	20.68	30.00	-9.32
	6445	99	AVG	18.72	2.10	20.82	30.00	-9.18
	6485	107	AVG	18.78	2.10	20.88	30.00	-9.12
	6525	115	AVG	18.79	2.10	20.89	30.00	-9.11
	6565	123	AVG	18.94	3.00	21.94	30.00	-8.06
	6725	155	AVG	18.97	3.00	21.97	30.00	-8.03
	6845	179	AVG	18.73	3.00	21.73	30.00	-8.27

Table 7-9. Antenna 3c 40MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power – Standard Power

6GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5985	7	AVG	18.66	1.80	20.46	30.00	-9.54
	6145	39	AVG	18.74	1.80	20.54	30.00	-9.47
	6385	87	AVG	18.72	1.80	20.52	30.00	-9.48
	6465	103	AVG	18.77	2.10	20.87	30.00	-9.13
	6625	135	AVG	18.86	3.00	21.86	30.00	-8.14
	6705	151	AVG	18.86	3.00	21.86	30.00	-8.14
	6785	167	AVG	19.00	3.00	22.00	30.00	-8.00

Table 7-10. Antenna 3c 80MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power – Standard Power

FCC ID: BCGA3267 IC: 579C-A3267	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210073-23.BCG	Test Dates: 10/25/2024 - 1/6/2025	EUT Type: Tablet Device	Page 47 of 262

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

6GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	6025	15	AVG	18.72	1.80	20.52	30.00	-9.48
	6185	47	AVG	18.76	1.80	20.56	30.00	-9.44
	6345	79	AVG	18.93	1.80	20.73	30.00	-9.27
	6505	111	AVG	18.79	2.10	20.89	30.00	-9.11
	6665	143	AVG	18.77	3.00	21.77	30.00	-8.23

Table 7-11. Antenna 3c 160MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power – Standard Power

FCC ID: BCGA3267 IC: 579C-A3267	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210073-23.BCG	Test Dates: 10/25/2024 - 1/6/2025	EUT Type: Tablet Device	Page 48 of 262

V 10.6 10/27/2023

7.3.2 Antenna 3c Conducted Output Power Measurements – LPI

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]		Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11a	802.11ax				
	5955	1	AVG	6.96	7.48	1.80	9.28	24.00	-14.72
	6175	45	AVG	6.43	7.00	1.80	8.80	24.00	-15.20
	6415	93	AVG	6.48	6.71	1.80	8.51	24.00	-15.49
	6435	97	AVG	6.17	6.35	2.10	8.45	24.00	-15.55
	6475	105	AVG	5.92	6.46	2.10	8.56	24.00	-15.44
	6515	113	AVG	5.86	6.56	2.10	8.66	24.00	-15.34
	6535	117	AVG	5.32	5.66	3.00	8.66	24.00	-15.34
	6695	149	AVG	5.30	5.89	3.00	8.89	24.00	-15.11
	6875	185	AVG	4.94	5.46	3.00	8.46	24.00	-15.55
	6895	189	AVG	4.90	5.31	3.30	8.61	24.00	-15.39
	6995	209	AVG	4.83	5.24	3.30	8.54	24.00	-15.46
	7115	233	AVG	4.83	5.23	3.30	8.53	24.00	-15.47

Table 7-12. Antenna 3c 20MHz BW 802.11a/ax(SU) (UNII) Maximum Conducted Output Power

6GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5965	3	AVG	10.54	1.80	12.34	24.00	-11.66
	6165	43	AVG	9.91	1.80	11.71	24.00	-12.29
	6405	91	AVG	9.70	1.80	11.50	24.00	-12.50
	6445	99	AVG	9.39	2.10	11.49	24.00	-12.51
	6485	107	AVG	9.39	2.10	11.49	24.00	-12.51
	6525	115	AVG	8.87	2.10	10.97	24.00	-13.03
	6565	123	AVG	8.73	3.00	11.73	24.00	-12.27
	6725	155	AVG	8.83	3.00	11.83	24.00	-12.17
	6845	179	AVG	8.89	3.00	11.89	24.00	-12.11
	6885	187	AVG	8.18	3.30	11.48	24.00	-12.52
	7005	211	AVG	8.33	3.30	11.63	24.00	-12.37
	7085	227	AVG	8.14	3.30	11.44	24.00	-12.56

Table 7-13. Antenna 3c 40MHz 802.11ax(SU) BW (UNII) Maximum Conducted Output Power

FCC ID: BCGA3267 IC: 579C-A3267	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210073-23.BCG	Test Dates: 10/25/2024 - 1/6/2025	EUT Type: Tablet Device	Page 49 of 262

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

6GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5985	7	AVG	12.98	1.80	14.78	24.00	-9.22
	6145	39	AVG	12.69	1.80	14.49	24.00	-9.51
	6385	87	AVG	12.40	1.80	14.20	24.00	-9.80
	6465	103	AVG	12.08	2.10	14.18	24.00	-9.82
	6545	119	AVG	11.14	3.00	14.14	24.00	-9.86
	6705	151	AVG	11.27	3.00	14.27	24.00	-9.73
	6865	183	AVG	10.70	3.00	13.70	24.00	-10.30
	6945	199	AVG	10.73	3.30	14.03	24.00	-9.97
	7025	215	AVG	10.78	3.30	14.08	24.00	-9.92

Table 7-14. Antenna 3c 80MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

6GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	6025	15	AVG	15.42	1.80	17.22	24.00	-6.78
	6185	47	AVG	15.23	1.80	17.03	24.00	-6.97
	6345	79	AVG	14.87	1.80	16.67	24.00	-7.33
	6505	111	AVG	13.95	2.10	16.05	24.00	-7.95
	6665	143	AVG	13.68	3.00	16.68	24.00	-7.32
	6825	175	AVG	13.30	3.00	16.30	24.00	-7.70
	6985	207	AVG	13.45	3.30	16.75	24.00	-7.25

Table 7-15. Antenna 3c 160MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3267 IC: 579C-A3267	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210073-23.BCG	Test Dates: 10/25/2024 - 1/6/2025	EUT Type: Tablet Device	Page 50 of 262

V 10.6 10/27/2023

7.3.3 Antenna 3a Conducted Output Power Measurements – SP

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]		Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11a	802.11ax				
	5955	1	AVG	18.68	18.89	0.50	19.39	30.00	-10.61
	6175	45	AVG	18.95	18.83	0.50	19.45	30.00	-10.55
	6415	93	AVG	18.83	18.82	0.50	19.33	30.00	-10.67
	6435	97	AVG	18.71	18.75	-1.30	17.45	30.00	-12.55
	6475	105	AVG	18.79	18.82	-1.30	17.52	30.00	-12.48
	6515	113	AVG	18.76	18.73	-1.30	17.46	30.00	-12.54
	6535	117	AVG	18.79	18.75	-0.80	17.99	30.00	-12.02
	6695	149	AVG	18.64	18.78	-0.80	17.98	30.00	-12.02
	6855	181	AVG	18.61	18.81	-0.80	18.01	30.00	-11.99

Table 7-16. Antenna 3a 20MHz BW 802.11a/ax(SU) (UNII) Maximum Conducted Output Power

6GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5965	3	AVG	18.82	0.50	19.32	30.00	-10.68
	6165	43	AVG	18.76	0.50	19.26	30.00	-10.74
	6405	91	AVG	18.67	0.50	19.17	30.00	-10.83
	6445	99	AVG	18.78	-1.30	17.48	30.00	-12.52
	6485	107	AVG	18.72	-1.30	17.42	30.00	-12.58
	6525	115	AVG	18.77	-1.30	17.47	30.00	-12.53
	6565	123	AVG	18.67	-0.80	17.87	30.00	-12.13
	6725	155	AVG	18.87	-0.80	18.07	30.00	-11.93
	6845	179	AVG	18.88	-0.80	18.08	30.00	-11.92

Table 7-17. Antenna 3a 40MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

6GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5985	7	AVG	18.84	0.50	19.34	30.00	-10.66
	6145	39	AVG	18.69	0.50	19.19	30.00	-10.81
	6385	87	AVG	18.72	0.50	19.22	30.00	-10.79
	6465	103	AVG	18.73	-1.30	17.43	30.00	-12.57
	6625	135	AVG	18.68	-0.80	17.88	30.00	-12.12
	6705	151	AVG	18.95	-0.80	18.15	30.00	-11.85
	6785	167	AVG	18.62	-0.80	17.82	30.00	-12.18

Table 7-18. Antenna 3a 80MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3267 IC: 579C-A3267	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210073-23.BCG	Test Dates: 10/25/2024 - 1/6/2025	EUT Type: Tablet Device	Page 51 of 262

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

6GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	6025	15	AVG	18.99	0.50	19.49	30.00	-10.51
	6185	47	AVG	18.60	0.50	19.10	30.00	-10.90
	6345	79	AVG	18.71	0.50	19.21	30.00	-10.79
	6505	111	AVG	18.78	-1.30	17.48	30.00	-12.52
	6665	143	AVG	18.85	-0.80	18.05	30.00	-11.95

Table 7-19. Antenna 3a 160MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3267 IC: 579C-A3267	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210073-23.BCG	Test Dates: 10/25/2024 - 1/6/2025	EUT Type: Tablet Device	Page 52 of 262

V 10.6 10/27/2023

7.3.4 Antenna 3a Conducted Output Power Measurements – LPI

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]		Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11a	802.11ax				
	5955	1	AVG	7.18	7.63	0.50	8.13	24.00	-15.87
	6175	45	AVG	6.70	7.14	0.50	7.64	24.00	-16.36
	6415	93	AVG	6.19	6.84	0.50	7.34	24.00	-16.66
	6435	97	AVG	6.21	6.44	-1.30	5.14	24.00	-18.87
	6475	105	AVG	5.97	6.59	-1.30	5.29	24.00	-18.71
	6515	113	AVG	6.11	6.53	-1.30	5.23	24.00	-18.77
	6535	117	AVG	5.42	5.87	-0.80	5.07	24.00	-18.93
	6695	149	AVG	5.47	5.93	-0.80	5.13	24.00	-18.88
	6875	185	AVG	4.79	5.31	-0.80	4.51	24.00	-19.49
	6895	189	AVG	4.72	5.32	-1.70	3.62	24.00	-20.38
	6995	209	AVG	4.88	5.39	-1.70	3.69	24.00	-20.31
	7115	233	AVG	4.93	5.32	-1.70	3.62	24.00	-20.38

Table 7-20. Antenna 3a 20MHz BW 802.11a/ax(SU) (UNII) Maximum Conducted Output Power

6GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5965	3	AVG	10.46	0.50	10.96	24.00	-13.04
	6165	43	AVG	10.23	0.50	10.73	24.00	-13.27
	6405	91	AVG	9.97	0.50	10.47	24.00	-13.53
	6445	99	AVG	9.37	-1.30	8.07	24.00	-15.94
	6485	107	AVG	9.55	-1.30	8.25	24.00	-15.75
	6525	115	AVG	8.76	-1.30	7.46	24.00	-16.54
	6565	123	AVG	8.68	-0.80	7.88	24.00	-16.12
	6725	155	AVG	8.97	-0.80	8.17	24.00	-15.83
	6845	179	AVG	8.67	-0.80	7.87	24.00	-16.14
	6885	187	AVG	8.21	-1.70	6.51	24.00	-17.49
	7005	211	AVG	8.20	-1.70	6.50	24.00	-17.50
	7085	227	AVG	8.27	-1.70	6.57	24.00	-17.43

Table 7-21. Antenna 3a 40MHz 802.11ax(SU) BW (UNII) Maximum Conducted Output Power

FCC ID: BCGA3267 IC: 579C-A3267	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210073-23.BCG	Test Dates: 10/25/2024 - 1/6/2025	EUT Type: Tablet Device	Page 53 of 262

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

6GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5985	7	AVG	13.20	0.50	13.70	24.00	-10.30
	6145	39	AVG	12.36	0.50	12.86	24.00	-11.14
	6385	87	AVG	12.34	0.50	12.84	24.00	-11.17
	6465	103	AVG	12.11	-1.30	10.81	24.00	-13.19
	6545	119	AVG	11.34	-0.80	10.54	24.00	-13.46
	6705	151	AVG	11.45	-0.80	10.65	24.00	-13.35
	6865	183	AVG	10.87	-0.80	10.07	24.00	-13.93
	6945	199	AVG	10.98	-1.70	9.28	24.00	-14.72
	7025	215	AVG	10.77	-1.70	9.07	24.00	-14.93

Table 7-22. Antenna 3a 80MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

6GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	6025	15	AVG	15.58	0.50	16.08	24.00	-7.92
	6185	47	AVG	15.24	0.50	15.74	24.00	-8.26
	6345	79	AVG	14.62	0.50	15.12	24.00	-8.88
	6505	111	AVG	13.82	-1.30	12.52	24.00	-11.49
	6665	143	AVG	13.79	-0.80	12.99	24.00	-11.01
	6825	175	AVG	13.31	-0.80	12.51	24.00	-11.49
	6985	207	AVG	13.42	-1.70	11.72	24.00	-12.28

Table 7-23. Antenna 3a 160MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3267 IC: 579C-A3267	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210073-23.BCG	Test Dates: 10/25/2024 - 1/6/2025	EUT Type: Tablet Device	Page 54 of 262

V 10.6 10/27/2023

7.3.5 Antenna 1b Conducted Output Power Measurements – SP

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]		Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11a	802.11ax				
	5955	1	AVG	18.65	18.60	-0.70	17.95	30.00	-12.05
	6175	45	AVG	18.86	18.76	-0.70	18.16	30.00	-11.84
	6415	93	AVG	18.93	18.80	-0.70	18.23	30.00	-11.77
	6435	97	AVG	18.69	18.78	-0.30	18.48	30.00	-11.52
	6475	105	AVG	18.73	18.75	-0.30	18.45	30.00	-11.55
	6515	113	AVG	18.76	18.77	-0.30	18.47	30.00	-11.53
	6535	117	AVG	18.74	18.79	1.70	20.49	30.00	-9.51
	6695	149	AVG	18.93	18.76	1.70	20.63	30.00	-9.37
	6855	181	AVG	18.96	18.87	1.70	20.66	30.00	-9.34

Table 7-24. Antenna 1b 20MHz BW 802.11a/ax(SU) (UNII) Maximum Conducted Output Power – Standard Power

6GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5965	3	AVG	18.66	-0.70	17.96	30.00	-12.04
	6165	43	AVG	18.96	-0.70	18.26	30.00	-11.74
	6405	91	AVG	18.72	-0.70	18.02	30.00	-11.98
	6445	99	AVG	18.73	-0.30	18.43	30.00	-11.57
	6485	107	AVG	18.76	-0.30	18.46	30.00	-11.54
	6525	115	AVG	18.77	-0.30	18.47	30.00	-11.53
	6565	123	AVG	18.87	1.70	20.57	30.00	-9.43
	6725	155	AVG	18.90	1.70	20.60	30.00	-9.40
	6845	179	AVG	18.95	1.70	20.65	30.00	-9.36

Table 7-25. Antenna 1b 40MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power – Standard Power

6GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5985	7	AVG	18.88	-0.70	18.18	30.00	-11.82
	6145	39	AVG	18.79	-0.70	18.09	30.00	-11.91
	6385	87	AVG	18.70	-0.70	18.00	30.00	-12.00
	6465	103	AVG	18.72	-0.30	18.42	30.00	-11.58
	6625	135	AVG	18.75	1.70	20.45	30.00	-9.55
	6705	151	AVG	18.71	1.70	20.41	30.00	-9.59
	6785	167	AVG	18.69	1.70	20.39	30.00	-9.61

Table 7-26. Antenna 1b 80MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power – Standard Power

FCC ID: BCGA3267 IC: 579C-A3267	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210073-23.BCG	Test Dates: 10/25/2024 - 1/6/2025	EUT Type: Tablet Device	Page 55 of 262

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

6GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	6025	15	AVG	18.82	-0.70	18.12	30.00	-11.88
	6185	47	AVG	18.91	-0.70	18.21	30.00	-11.79
	6345	79	AVG	18.67	-0.70	17.97	30.00	-12.03
	6505	111	AVG	18.70	-0.30	18.40	30.00	-11.60
	6665	143	AVG	18.72	1.70	20.42	30.00	-9.58

Table 7-27. Antenna 1b 160MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power – Standard Power

FCC ID: BCGA3267 IC: 579C-A3267	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210073-23.BCG	Test Dates: 10/25/2024 - 1/6/2025	EUT Type: Tablet Device	Page 56 of 262

V 10.6 10/27/2023

7.3.6 Antenna 1b Conducted Output Power Measurements – LPI

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]		Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11a	802.11ax				
	5955	1	AVG	6.86	7.39	-0.70	6.69	24.00	-17.31
	6175	45	AVG	6.65	6.96	-0.70	6.26	24.00	-17.74
	6415	93	AVG	6.20	6.86	-0.70	6.16	24.00	-17.84
	6435	97	AVG	5.96	6.44	-0.30	6.14	24.00	-17.86
	6475	105	AVG	6.17	6.57	-0.30	6.27	24.00	-17.73
	6515	113	AVG	6.12	6.48	-0.30	6.18	24.00	-17.83
	6535	117	AVG	5.13	5.64	1.70	7.34	24.00	-16.66
	6695	149	AVG	5.21	5.96	1.70	7.66	24.00	-16.34
	6875	185	AVG	4.74	5.26	1.70	6.96	24.00	-17.05
	6895	189	AVG	4.78	5.30	-2.20	3.10	24.00	-20.90
	6995	209	AVG	4.75	5.47	-2.20	3.27	24.00	-20.73
	7115	233	AVG	4.90	5.48	-2.20	3.28	24.00	-20.72

Table 7-28. Antenna 1b 20MHz BW 802.11a/ax(SU) (UNII) Maximum Conducted Output Power

6GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5965	3	AVG	10.39	-0.70	9.69	24.00	-14.31
	6165	43	AVG	10.11	-0.70	9.41	24.00	-14.59
	6405	91	AVG	9.78	-0.70	9.08	24.00	-14.92
	6445	99	AVG	9.43	-0.30	9.13	24.00	-14.87
	6485	107	AVG	9.48	-0.30	9.18	24.00	-14.82
	6525	115	AVG	8.74	-0.30	8.44	24.00	-15.56
	6565	123	AVG	8.63	1.70	10.33	24.00	-13.67
	6725	155	AVG	8.79	1.70	10.49	24.00	-13.51
	6845	179	AVG	8.65	1.70	10.35	24.00	-13.66
	6885	187	AVG	8.22	-2.20	6.02	24.00	-17.98
	7005	211	AVG	8.27	-2.20	6.07	24.00	-17.93
	7085	227	AVG	8.40	-2.20	6.20	24.00	-17.80

Table 7-29. Antenna 1b 40MHz 802.11ax(SU) BW (UNII) Maximum Conducted Output Power

FCC ID: BCGA3267 IC: 579C-A3267	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210073-23.BCG	Test Dates: 10/25/2024 - 1/6/2025	EUT Type: Tablet Device	Page 57 of 262

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

6GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5985	7	AVG	12.95	-0.70	12.25	24.00	-11.75
	6145	39	AVG	12.70	-0.70	12.00	24.00	-12.00
	6385	87	AVG	12.26	-0.70	11.56	24.00	-12.45
	6465	103	AVG	12.13	-0.30	11.83	24.00	-12.17
	6545	119	AVG	11.22	1.70	12.92	24.00	-11.08
	6705	151	AVG	11.17	1.70	12.87	24.00	-11.13
	6865	183	AVG	10.72	1.70	12.42	24.00	-11.58
	6945	199	AVG	10.80	-2.20	8.60	24.00	-15.40
	7025	215	AVG	10.80	-2.20	8.60	24.00	-15.40

Table 7-30. Antenna 1b 80MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

6GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	6025	15	AVG	15.60	-0.70	14.90	24.00	-9.10
	6185	47	AVG	15.20	-0.70	14.50	24.00	-9.50
	6345	79	AVG	14.93	-0.70	14.23	24.00	-9.77
	6505	111	AVG	13.93	-0.30	13.63	24.00	-10.37
	6665	143	AVG	13.76	1.70	15.46	24.00	-8.54
	6825	175	AVG	13.49	1.70	15.19	24.00	-8.81
	6985	207	AVG	13.31	-2.20	11.11	24.00	-12.89

Table 7-31. Antenna 1b 160MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3267 IC: 579C-A3267	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210073-23.BCG	Test Dates: 10/25/2024 - 1/6/2025	EUT Type: Tablet Device	Page 58 of 262

V 10.6 10/27/2023

7.3.7 CDD/SDM Primary Conducted Output Power Measurements – SP

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Ant 3c	Ant 3a	Summed				
	5955	1	CDD	AVG	19.00	18.77	21.89	1.80	23.69	30.00	-6.31
	6175	45	CDD	AVG	18.83	18.83	21.84	1.80	23.64	30.00	-6.36
	6415	93	CDD	AVG	18.97	18.91	21.95	1.80	23.75	30.00	-6.25
	6435	97	CDD	AVG	18.79	18.92	21.77	2.10	23.87	30.00	-6.13
	6475	105	CDD	AVG	18.77	18.78	21.79	2.10	23.89	30.00	-6.11
	6515	113	CDD	AVG	18.81	18.76	21.80	2.10	23.90	30.00	-6.10
	6535	117	SDM	AVG	18.87	18.85	21.87	1.50	23.37	30.00	-6.63
	6695	149	SDM	AVG	18.77	18.66	21.73	1.50	23.23	30.00	-6.77
	6855	181	SDM	AVG	18.75	18.67	21.72	1.50	23.22	30.00	-6.78

Table 7-32. CDD/SDM 20MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

6GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Ant 3c	Ant 3a	Summed				
	5965	3	CDD	AVG	18.72	19.00	21.87	1.80	23.67	30.00	-6.33
	6165	43	CDD	AVG	18.82	18.82	21.83	1.80	23.63	30.00	-6.37
	6405	91	CDD	AVG	18.69	18.79	21.75	1.80	23.55	30.00	-6.45
	6445	99	CDD	AVG	18.78	18.81	21.81	2.10	23.91	30.00	-6.09
	6485	107	CDD	AVG	18.81	18.74	21.79	2.10	23.89	30.00	-6.11
	6525	115	CDD	AVG	18.76	18.76	21.77	2.10	23.87	30.00	-6.13
	6565	123	CDD	AVG	18.84	18.95	21.91	3.00	24.91	30.00	-5.09
	6725	155	CDD	AVG	18.99	18.81	21.91	3.00	24.91	30.00	-5.09
	6845	179	CDD	AVG	18.74	18.73	21.75	3.00	24.75	30.00	-5.25

Table 7-33. CDD 40MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

6GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Ant 3c	Ant 3a	Summed				
	5985	7	CDD	AVG	18.82	18.63	21.74	1.80	23.54	30.00	-6.46
	6145	39	CDD	AVG	18.84	18.75	21.81	1.80	23.61	30.00	-6.39
	6385	87	CDD	AVG	18.82	18.68	21.76	1.80	23.56	30.00	-6.44
	6465	103	CDD	AVG	18.78	18.72	21.76	2.10	23.86	30.00	-6.14
	6625	135	CDD	AVG	18.77	18.88	21.83	3.00	24.83	30.00	-5.17
	6705	151	CDD	AVG	18.69	18.78	21.75	3.00	24.75	30.00	-5.25
	6785	167	CDD	AVG	18.93	18.87	21.91	3.00	24.91	30.00	-5.09

Table 7-34. CDD 80MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

6GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Ant 3c	Ant 3a	Summed				
	6025	15	CDD	AVG	18.97	18.99	21.99	1.80	23.79	30.00	-6.21
	6185	47	CDD	AVG	18.84	18.81	21.84	1.80	23.64	30.00	-6.36
	6345	79	CDD	AVG	18.62	18.81	21.72	1.80	23.52	30.00	-6.48
	6505	111	CDD	AVG	18.70	18.76	21.74	2.10	23.84	30.00	-6.16
	6665	143	CDD	AVG	18.65	18.73	21.70	3.00	24.70	30.00	-5.30

Table 7-35. CDD 160MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3267 IC: 579C-A3267			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210073-23.BCG	Test Dates: 10/25/2024 - 1/6/2025	EUT Type: Tablet Device		Page 59 of 262

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.3.8 SDM Primary Conducted Output Power Measurements – LPI

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Ant 3c	Ant 3a	Summed				
	5955	1	SDM	AVG	4.81	4.90	7.87	1.20	9.07	24.00	-14.93
	6175	45	SDM	AVG	4.67	4.79	7.74	1.20	8.94	24.00	-15.06
	6415	93	SDM	AVG	4.93	4.83	7.89	1.20	9.09	24.00	-14.91
	6435	97	SDM	AVG	4.62	4.70	7.67	0.72	8.39	24.00	-15.61
	6475	105	SDM	AVG	4.35	4.40	7.39	0.72	8.11	24.00	-15.89
	6515	113	SDM	AVG	4.51	4.41	7.47	0.72	8.19	24.00	-15.81
	6535	117	SDM	AVG	3.12	3.22	6.18	1.50	7.68	24.00	-16.32
	6695	149	SDM	AVG	3.40	3.37	6.40	1.50	7.90	24.00	-16.10
	6875	185	SDM	AVG	3.41	3.11	6.27	1.50	7.77	24.00	-16.23
	6895	189	SDM	AVG	4.49	4.31	7.41	1.48	8.89	24.00	-15.11
	6995	209	SDM	AVG	4.27	4.36	7.33	1.48	8.81	24.00	-15.19
	7115	233	SDM	AVG	4.20	4.44	7.33	1.48	8.81	24.00	-15.19

Table 7-36. SDM 20MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

6GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Ant 3c	Ant 3a	Summed				
	5965	3	SDM	AVG	7.65	7.60	10.64	1.20	11.84	24.00	-12.16
	6165	43	SDM	AVG	7.92	7.85	10.89	1.20	12.09	24.00	-11.91
	6405	91	SDM	AVG	7.92	7.77	10.86	1.20	12.06	24.00	-11.94
	6445	99	SDM	AVG	7.63	7.46	10.56	0.72	11.28	24.00	-12.72
	6485	107	SDM	AVG	7.59	7.49	10.55	0.72	11.27	24.00	-12.73
	6525	115	SDM	AVG	6.13	6.35	9.25	0.72	9.97	24.00	-14.03
	6565	123	SDM	AVG	6.35	6.27	9.32	1.50	10.82	24.00	-13.18
	6725	155	SDM	AVG	6.44	6.13	9.29	1.50	10.79	24.00	-13.21
	6845	179	SDM	AVG	6.13	6.49	9.32	1.50	10.82	24.00	-13.18
	6885	187	SDM	AVG	6.46	6.43	9.46	1.48	10.94	24.00	-13.06
	7005	211	SDM	AVG	7.26	7.14	10.21	1.48	11.69	24.00	-12.31
	7085	227	SDM	AVG	7.17	7.42	10.30	1.48	11.78	24.00	-12.22

Table 7-37. SDM 40MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

6GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Ant 3c	Ant 3a	Summed				
	5985	7	SDM	AVG	10.35	10.22	13.29	1.20	14.49	24.00	-9.51
	6145	39	SDM	AVG	10.28	10.37	13.34	1.20	14.54	24.00	-9.46
	6385	87	SDM	AVG	10.18	10.35	13.27	1.20	14.47	24.00	-9.53
	6465	103	SDM	AVG	9.99	10.23	13.13	0.72	13.85	24.00	-10.15
	6545	119	SDM	AVG	8.71	8.94	11.84	1.50	13.34	24.00	-10.66
	6705	151	SDM	AVG	8.65	8.61	11.64	1.50	13.14	24.00	-10.86
	6865	183	SDM	AVG	8.99	8.65	11.83	1.50	13.33	24.00	-10.67
	6945	199	SDM	AVG	9.99	9.89	12.95	1.48	14.43	24.00	-9.57
	7025	215	SDM	AVG	9.72	9.82	12.78	1.48	14.26	24.00	-9.74

Table 7-38. SDM 80MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3267 IC: 579C-A3267	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210073-23.BCG	Test Dates: 10/25/2024 - 1/6/2025	EUT Type: Tablet Device	Page 60 of 262

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

6GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Ant 3c	Ant 3a	Summed				
	6025	15	SDM	AVG	12.98	12.96	15.98	1.20	17.18	24.00	-6.82
	6185	47	SDM	AVG	12.66	12.81	15.74	1.20	16.94	24.00	-7.06
	6345	79	SDM	AVG	12.63	12.65	15.65	1.20	16.85	24.00	-7.15
	6505	111	SDM	AVG	11.19	11.14	14.17	0.72	14.89	24.00	-9.11
	6665	143	SDM	AVG	11.21	11.44	14.33	1.50	15.83	24.00	-8.17
	6825	175	SDM	AVG	11.39	11.33	14.37	1.50	15.87	24.00	-8.13
	6985	207	SDM	AVG	12.22	12.21	15.22	1.48	16.70	24.00	-7.30

Table 7-39. SDM 160MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3267 IC: 579C-A3267	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210073-23.BCG	Test Dates: 10/25/2024 - 1/6/2025	EUT Type: Tablet Device	Page 61 of 262

V 10.6 10/27/2023

7.3.9 CDD/SDM Diversity Conducted Output Power Measurements – SP

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Ant 3c	Ant 1b	Summed				
	5955	1	CDD	AVG	19.00	18.73	21.87	1.80	23.67	30.00	-6.33
	6175	45	CDD	AVG	18.83	18.77	21.81	1.80	23.61	30.00	-6.39
	6415	93	CDD	AVG	18.97	18.58	21.79	1.80	23.59	30.00	-6.41
	6435	97	CDD	AVG	18.79	18.81	21.81	2.10	23.91	30.00	-6.09
	6475	105	CDD	AVG	18.77	18.79	21.79	2.10	23.89	30.00	-6.11
	6515	113	CDD	AVG	18.81	18.77	21.80	2.10	23.90	30.00	-6.10
	6535	117	SDM	AVG	18.87	19.00	21.94	2.40	24.34	30.00	-5.66
	6695	149	SDM	AVG	18.77	18.73	21.76	2.40	24.16	30.00	-5.84
	6855	181	SDM	AVG	18.75	18.66	21.72	2.40	24.12	30.00	-5.88

Table 7-40. CDD/SDM Diversity 20MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

6GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Ant 3c	Ant 1b	Summed				
	5965	3	CDD	AVG	18.72	18.67	21.71	1.80	23.51	30.00	-6.49
	6165	43	CDD	AVG	18.82	18.93	21.89	1.80	23.69	30.00	-6.31
	6405	91	CDD	AVG	18.69	18.84	21.77	1.80	23.57	30.00	-6.43
	6445	99	CDD	AVG	18.78	18.72	21.76	2.10	23.86	30.00	-6.14
	6485	107	CDD	AVG	18.81	18.79	21.81	2.10	23.91	30.00	-6.09
	6525	115	CDD	AVG	18.76	18.73	21.76	2.10	23.86	30.00	-6.14
	6565	123	CDD	AVG	18.84	18.91	21.88	3.00	24.88	30.00	-5.12
	6725	155	CDD	AVG	18.99	18.89	21.95	3.00	24.95	30.00	-5.05
	6845	179	CDD	AVG	18.74	18.76	21.76	3.00	24.76	30.00	-5.24

Table 7-41. CDD Diversity 40MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

6GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Ant 3c	Ant 1b	Summed				
	5985	7	CDD	AVG	18.82	18.89	21.87	1.80	23.67	30.00	-6.33
	6145	39	CDD	AVG	18.84	18.73	21.79	1.80	23.59	30.00	-6.41
	6385	87	CDD	AVG	18.82	18.78	21.81	1.80	23.61	30.00	-6.39
	6465	103	CDD	AVG	18.78	18.77	21.79	2.10	23.89	30.00	-6.11
	6625	135	CDD	AVG	18.77	18.74	21.76	3.00	24.76	30.00	-5.24
	6705	151	CDD	AVG	18.69	18.69	21.70	3.00	24.70	30.00	-5.30
	6785	167	CDD	AVG	18.93	18.79	21.87	3.00	24.87	30.00	-5.13

Table 7-42. SDM Diversity 80MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

6GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Ant 3c	Ant 1b	Summed				
	6025	15	CDD	AVG	18.97	18.83	21.91	1.80	23.71	30.00	-6.29
	6185	47	CDD	AVG	18.84	18.84	21.85	1.80	23.65	30.00	-6.35
	6345	79	CDD	AVG	18.62	18.66	21.65	1.80	23.45	30.00	-6.55
	6505	111	CDD	AVG	18.70	18.73	21.73	2.10	23.83	30.00	-6.17
	6665	143	CDD	AVG	18.65	18.86	21.77	3.00	24.77	30.00	-5.23

Table 7-43. SDM Diversity 160MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3267 IC: 579C-A3267			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210073-23.BCG	Test Dates: 10/25/2024 - 1/6/2025	EUT Type: Tablet Device		Page 62 of 262

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.3.10 SDM Diversity Conducted Output Power Measurements – LPI

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Ant 3c	Ant 1b	Summed				
	5955	1	SDM	AVG	4.81	4.94	7.89	0.73	8.62	24.00	-15.38
	6175	45	SDM	AVG	4.67	4.86	7.78	0.73	8.51	24.00	-15.49
	6415	93	SDM	AVG	4.93	4.91	7.93	0.73	8.66	24.00	-15.34
	6435	97	SDM	AVG	4.62	4.70	7.67	1.06	8.73	24.00	-15.27
	6475	105	SDM	AVG	4.35	4.74	7.56	1.06	8.62	24.00	-15.38
	6515	113	SDM	AVG	4.51	4.55	7.54	1.06	8.60	24.00	-15.40
	6535	117	SDM	AVG	3.12	3.49	6.32	2.40	8.72	24.00	-15.28
	6695	149	SDM	AVG	3.40	3.35	6.38	2.40	8.78	24.00	-15.22
	6875	185	SDM	AVG	3.41	3.12	6.28	2.40	8.68	24.00	-15.32
	6895	189	SDM	AVG	4.49	4.21	7.36	1.37	8.73	24.00	-15.27
	6995	209	SDM	AVG	4.27	4.43	7.36	1.37	8.73	24.00	-15.27
	7115	233	SDM	AVG	4.20	4.38	7.30	1.37	8.67	24.00	-15.33

Table 7-44. SDM Diversity 20MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

6GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Ant 3c	Ant 1b	Summed				
	5965	3	SDM	AVG	7.65	7.84	10.75	0.73	11.48	24.00	-12.52
	6165	43	SDM	AVG	7.92	7.66	10.80	0.73	11.53	24.00	-12.47
	6405	91	SDM	AVG	7.92	7.99	10.96	0.73	11.69	24.00	-12.31
	6445	99	SDM	AVG	7.63	7.56	10.61	1.06	11.67	24.00	-12.33
	6485	107	SDM	AVG	7.59	7.55	10.58	1.06	11.64	24.00	-12.36
	6525	115	SDM	AVG	6.13	6.14	9.15	1.06	10.21	24.00	-13.79
	6565	123	SDM	AVG	6.35	6.23	9.30	2.40	11.70	24.00	-12.30
	6725	155	SDM	AVG	6.44	6.22	9.34	2.40	11.74	24.00	-12.26
	6845	179	SDM	AVG	6.13	6.32	9.23	2.40	11.63	24.00	-12.37
	6885	187	SDM	AVG	6.46	6.39	9.43	1.37	10.80	24.00	-13.20
	7005	211	SDM	AVG	7.26	7.29	10.29	1.37	11.66	24.00	-12.34
	7085	227	SDM	AVG	7.17	7.29	10.24	1.37	11.61	24.00	-12.39

Table 7-45. SDM Diversity 40MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

6GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Ant 3c	Ant 1b	Summed				
	5985	7	SDM	AVG	10.35	10.44	13.41	0.73	14.14	24.00	-9.86
	6145	39	SDM	AVG	10.28	10.22	13.26	0.73	13.99	24.00	-10.01
	6385	87	SDM	AVG	10.18	10.25	13.22	0.73	13.95	24.00	-10.05
	6465	103	SDM	AVG	9.99	10.05	13.03	1.06	14.09	24.00	-9.91
	6545	119	SDM	AVG	8.71	8.81	11.77	2.40	14.17	24.00	-9.83
	6705	151	SDM	AVG	8.65	8.79	11.73	2.40	14.13	24.00	-9.87
	6865	183	SDM	AVG	8.99	8.71	11.86	2.40	14.26	24.00	-9.74
	6945	199	SDM	AVG	9.99	9.97	12.99	1.37	14.36	24.00	-9.64
	7025	215	SDM	AVG	9.72	9.89	12.82	1.37	14.19	24.00	-9.81

Table 7-46. SDM Diversity 80MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3267 IC: 579C-A3267	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210073-23.BCG	Test Dates: 10/25/2024 - 1/6/2025	EUT Type: Tablet Device	Page 63 of 262

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

6GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Ant 3c	Ant 1b	Summed				
	6025	15	SDM	AVG	12.98	12.70	15.85	0.73	16.58	24.00	-7.42
	6185	47	SDM	AVG	12.66	12.95	15.82	0.73	16.55	24.00	-7.45
	6345	79	SDM	AVG	12.63	12.81	15.73	0.73	16.46	24.00	-7.54
	6505	111	SDM	AVG	11.19	11.49	14.35	1.06	15.41	24.00	-8.59
	6665	143	SDM	AVG	11.21	11.35	14.29	2.40	16.69	24.00	-7.31
	6825	175	SDM	AVG	11.39	11.17	14.29	2.40	16.69	24.00	-7.31
	6985	207	SDM	AVG	12.22	12.41	15.32	1.37	16.69	24.00	-7.31

Table 7-47. SDM Diversity 160MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3267 IC: 579C-A3267	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210073-23.BCG	Test Dates: 10/25/2024 - 1/6/2025	EUT Type: Tablet Device	Page 64 of 262

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Note:

Per ANSI C63.10-2020 and KDB 662911 v02r01 Section E1), the conducted powers at Antenna 3c and Antenna 1b were first measured separately during CDD/SDM transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10-2020 Subclause 14.6.3, the correlated directional gain is calculated using the following formula, where G_{ANT} is the gain of the n^{th} antenna.

$$\text{Directional gain} = G_{ANT} + \text{Array Gain dBi}$$

Per ANSI C63.10-2020 Subclause 14.6.3, the uncorrelated directional gain is calculated using the following formula, where G_N is the gain of the n^{th} antenna and N_{ANT} , the total number of antennas used.

$$\text{Directional gain} = 10 \log [(10^{G_1/10} + 10^{G_2/10} + \dots + 10^{G_N/10}) / N_{ANT}] \text{ dBi}$$

Sample SDM Calculation:

At 5955MHz in 802.11ax (20MHz BW) mode, the average conducted output power was measured to be 4.81 dBm for Antenna 3c and 4.94 dBm for Antenna 1b.

$$\text{Antenna 3c} + \text{Antenna 1b} = \text{SDM}$$

$$(4.81 \text{ dBm} + 4.94 \text{ dBm}) = (3.03 \text{ mW} + 3.12 \text{ mW}) = 6.15 \text{ mW} = 7.89 \text{ dBm}$$

Sample e.i.r.p. Calculation:

At 5955MHz in 802.11ax (20MHz BW) mode, the average SDM conducted power was calculated to be 7.89 dBm with directional gain of 0.73 dBi.

$$\text{e.i.r.p. (dBm)} = \text{Conducted Power (dBm)} + \text{Ant gain (dBi)}$$

$$7.89 \text{ dBm} + 0.73 \text{ dBi} = 8.62 \text{ dBm}$$

FCC ID: BCGA3267 IC: 579C-A3267	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210073-23.BCG	Test Dates: 10/25/2024 - 1/6/2025	EUT Type: Tablet Device	Page 65 of 262

V 10.6 10/27/2023

7.4 Maximum Power Spectral Density

§15.407(a)(7)(8), RSS-248 [4.5.3], [4.5.5]

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2020 and KDB 789033 D02 v02r01, and at the appropriate frequencies. Method SA-1, as defined in ANSI C63.10-2020 and KDB 789033 D02 v02r01, was used to measure the power spectral density.

The maximum permissible power spectral density must not exceed -1dBm e.i.r.p. in any 1-megahertz band for Low Power Indoor operating modes.

The maximum permissible power spectral density must not exceed 17dBm e.i.r.p. in any 1-megahertz band for Standard Power operating modes.

Test Procedure Used

ANSI C63.10-2020 – Section 12.4.2.2

KDB 789033 D02 v02r01 – Section F

ANSI C63.10-2020 – Section 14.5.2.2 Measure-and-Sum Technique

KDB 662911 v02r01 – Section E)2) Measure-and-Sum Technique

Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Set span to encompass the entire 99% OBW of the signal
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times (\text{span/RBW})$
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run for all modes
9. Trace was averaged over 100 sweeps
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup

Test Notes

1. All data rates have been investigated, and tabular data has been reported. Only the worst-case plot per bandwidth was reported.

FCC ID: BCGA3267 IC: 579C-A3267		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210073-23.BCG	Test Dates: 10/25/2024 - 1/6/2025	EUT Type: Tablet Device	Page 66 of 262

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.4.1 Antenna 3c Power Spectral Density Measurements – SP


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm/MHz]	Antenna Gain [dBi]	e.i.r.p Density [dBm/MHz]	Max EIRP Density [dBm/MHz]	Margin [dB]
Band 5	5955	1	a	54	7.90	1.80	9.70	17	-7.30
	6175	45	a	54	8.41	1.80	10.21	17	-6.80
	6415	93	a	54	8.28	1.80	10.08	17	-6.93
	5955	1	ax (20MHz)	49/51.6 (MCS4)	7.80	1.80	9.60	17	-7.40
	6175	45	ax (20MHz)	135/143.4 (MCS11)	7.98	1.80	9.78	17	-7.22
	6415	93	ax (20MHz)	135/143.4 (MCS11)	7.78	1.80	9.58	17	-7.42
	5965	3	ax (40MHz)	271/286.8 (MCS11)	4.80	1.80	6.60	17	-10.40
	6165	43	ax (40MHz)	98/103.2 (MCS4)	5.08	1.80	6.88	17	-10.13
	6405	91	ax (40MHz)	271/286.8 (MCS11)	5.13	1.80	6.93	17	-10.08
	5985	7	ax (80MHz)	204/216.2 (MCS4)	2.28	1.80	4.08	17	-12.92
	6145	39	ax (80MHz)	567/600.5 (MCS11)	2.31	1.80	4.11	17	-12.89
	6385	87	ax (80MHz)	567/600.5 (MCS11)	2.25	1.80	4.05	17	-12.95
	6025	15	ax (160MHz)	1020.8/1201 (MCS11)	-0.36	1.80	1.44	17	-15.56
	6181	47	ax (160MHz)	367.5/432.4 (MCS4)	-0.52	1.80	1.28	17	-15.72
Band 6	6345	79	ax (160MHz)	1020.8/1201 (MCS11)	-0.86	1.80	0.94	17	-16.06
	6435	97	a	24	8.18	2.10	10.28	17	-6.72
	6475	105	a	54	8.27	2.10	10.37	17	-6.63
	6515	113	a	24	7.84	2.10	9.94	17	-7.06
	6435	97	ax (20MHz)	24/25.8 (MCS2)	7.59	2.10	9.69	17	-7.31
	6475	105	ax (20MHz)	49/51.6 (MCS4)	7.47	2.10	9.57	17	-7.43
	6515	113	ax (20MHz)	49/51.6 (MCS4)	7.34	2.10	9.44	17	-7.56
	6445	99	ax (40MHz)	98/103.2 (MCS4)	5.08	2.10	7.18	17	-9.82
	6485	107	ax (40MHz)	98/103.2 (MCS4)	5.11	2.10	7.21	17	-9.79
	6525	115	ax (40MHz)	271/286.8 (MCS11)	5.28	2.10	7.38	17	-9.62
Band 7	6465	103	ax (80MHz)	567/600.5 (MCS11)	2.31	2.10	4.41	17	-12.60
	6505	111	ax (160MHz)	1020.8/1201 (MCS11)	-0.98	2.10	1.12	17	-15.88
	6535	117	a	54	8.10	3.00	11.10	17	-5.90
	6695	149	a	54	8.90	3.00	11.90	17	-5.10
	6875	181	a	54	9.24	3.00	12.24	17	-4.76
	6535	117	ax (20MHz)	135/143.4 (MCS11)	7.59	3.00	10.59	17	-6.41
	6695	149	ax (20MHz)	135/143.4 (MCS11)	8.51	3.00	11.51	17	-5.49
	6875	181	ax (20MHz)	135/143.4 (MCS11)	8.59	3.00	11.59	17	-5.41
	6565	123	ax (40MHz)	271/286.8 (MCS11)	5.24	3.00	8.24	17	-8.76
	6725	155	ax (40MHz)	49/51.6 (MCS2)	5.46	3.00	8.46	17	-8.54
	6845	179	ax (40MHz)	271/286.8 (MCS11)	5.66	3.00	8.66	17	-8.34
	6545	135	ax (80MHz)	204/216.2 (MCS4)	2.10	3.00	5.10	17	-11.90
	6705	151	ax (80MHz)	567/600.5 (MCS11)	2.59	3.00	5.59	17	-11.41
	6865	167	ax (80MHz)	567/600.5 (MCS11)	2.33	3.00	5.33	17	-11.67
	6665	143	ax (160MHz)	367.5/432.4 (MCS4)	-0.38	3.00	2.62	17	-14.38

Table 7-48. Power Spectral Density Measurements Antenna 3c


FCC ID: BCGA3267 IC: 579C-A3267	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210073-23.BCG	Test Dates: 10/25/2024 - 1/6/2025	EUT Type: Tablet Device	Page 67 of 262

V 10.6 10/27/2023


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

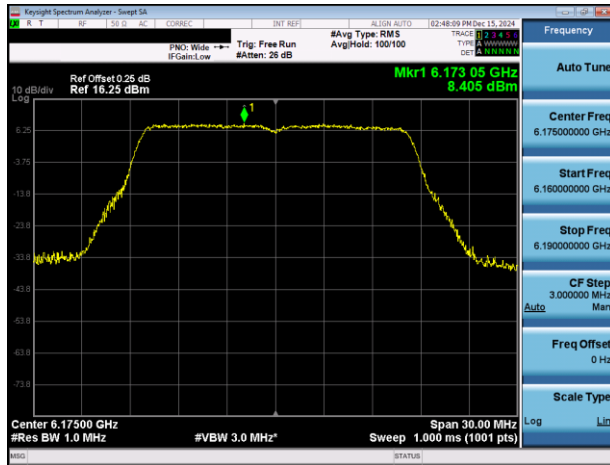


Plot 7-85. Power Spectral Density Plot Antenna 3c (20MHz 802.11a (UNII Band 5) – Ch. 45)

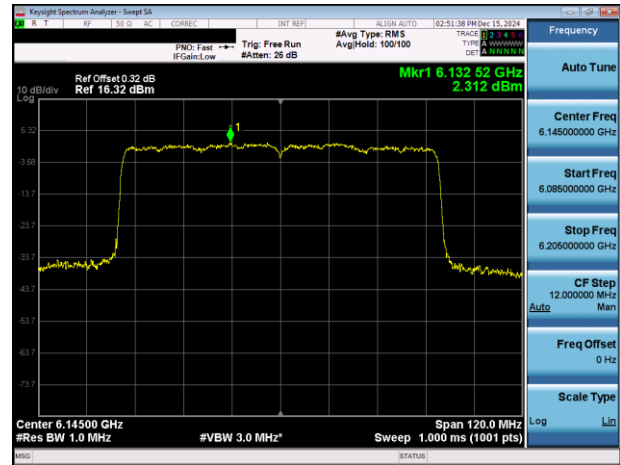

Plot 7-87. Power Spectral Density Plot Antenna 3c (80MHz 802.11ax (UNII Band 5) – Ch. 39)

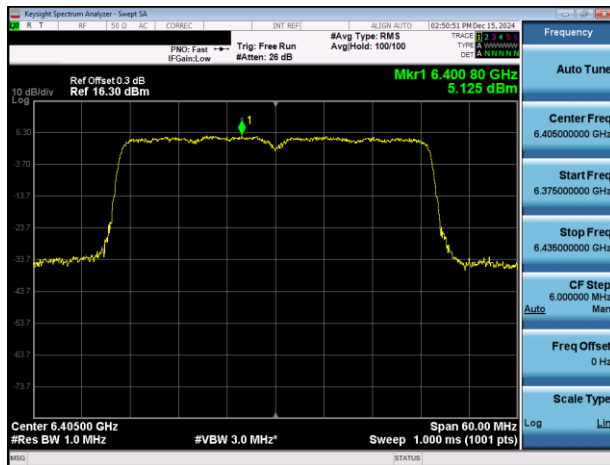


Plot 7-86. Power Spectral Density Plot Antenna 3c (40MHz 802.11ax (UNII Band 5) – Ch. 91)

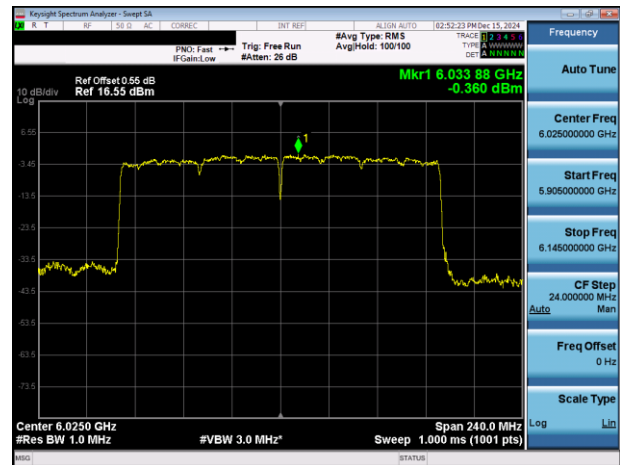


Plot 7-88. Power Spectral Density Plot Antenna 3c (160MHz 802.11ax (UNII Band 5) – Ch. 15)


FCC ID: BCGA3267 IC: 579C-A3267		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210073-23.BCG		Test Dates: 10/25/2024 - 1/6/2025	EUT Type: Tablet Device	Page 68 of 262

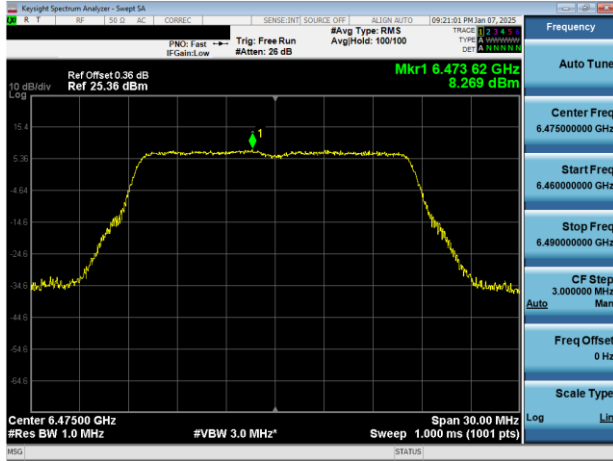


Plot 7-89. Power Spectral Density Plot Antenna 3c (20MHz 802.11a (UNII Band 6) – Ch. 105)

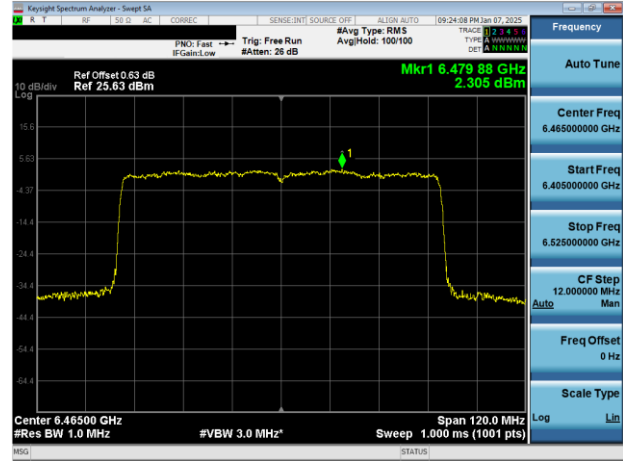

Plot 7-91. Power Spectral Density Plot Antenna 3c (80MHz 802.11ax (UNII Band 6) – Ch. 103)

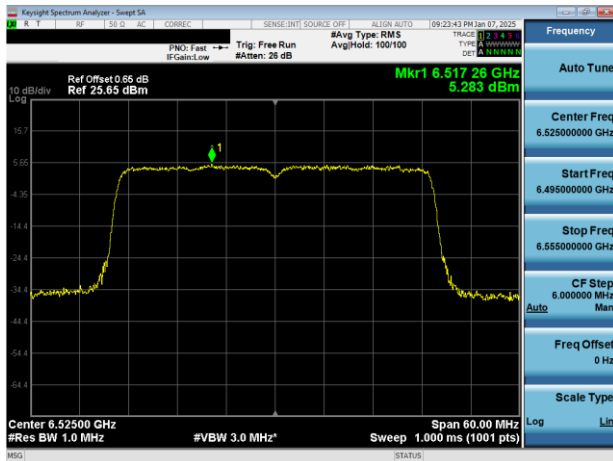


Plot 7-90. Power Spectral Density Plot Antenna 3c (40MHz 802.11ax (UNII Band 6) – Ch. 115)

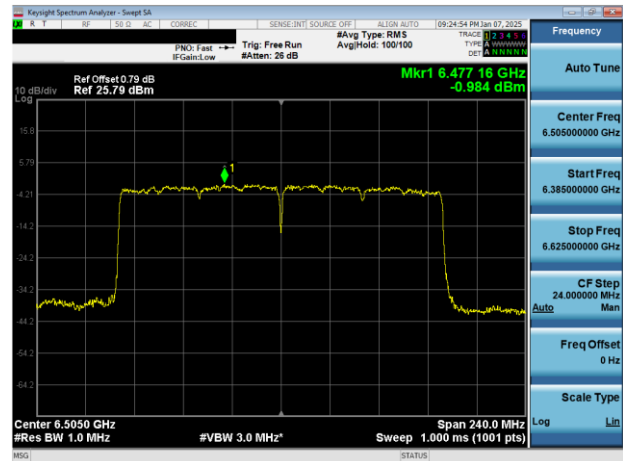


Plot 7-92. Power Spectral Density Plot Antenna 3c (160MHz 802.11ax (UNII Band 6) – Ch. 111)

FCC ID: BCGA3267 IC: 579C-A3267	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210073-23.BCG	Test Dates: 10/25/2024 - 1/6/2025	EUT Type: Tablet Device	Page 69 of 262


V 10.6 10/27/2023

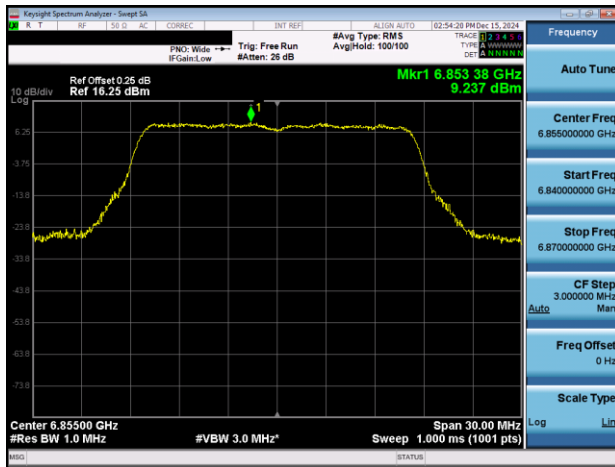


Plot 7-93. Power Spectral Density Plot Antenna 3c (20MHz 802.11a (UNII Band 7) – Ch. 181)

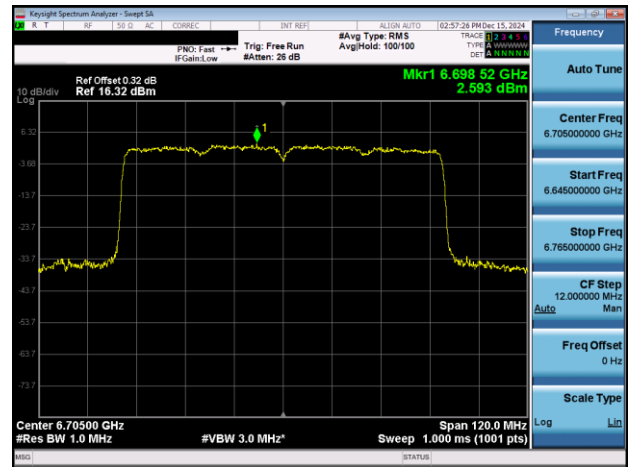

Plot 7-95. Power Spectral Density Plot Antenna 3c (80MHz 802.11ax (UNII Band 7) – Ch. 151)

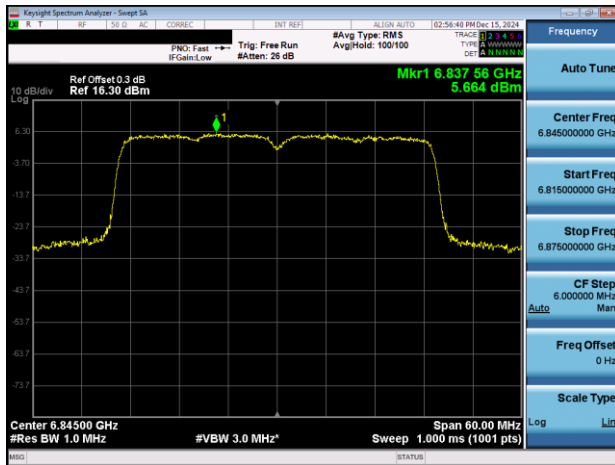

Plot 7-94. Power Spectral Density Plot Antenna 3c (40MHz 802.11ax (UNII Band 7) – Ch. 179)

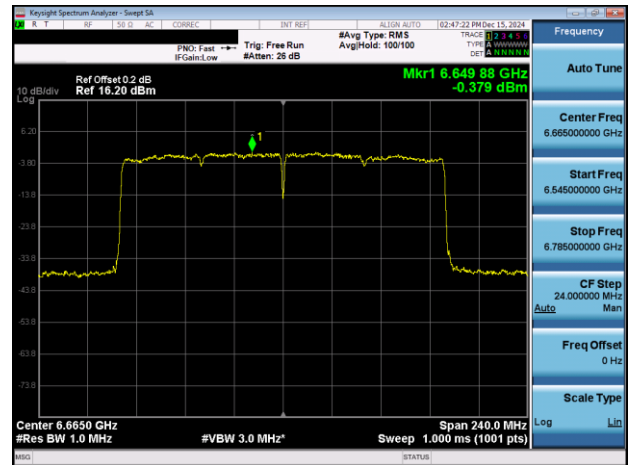

Plot 7-96. Power Spectral Density Plot Antenna 3c (160MHz 802.11ax (UNII Band 7) – Ch. 143)

FCC ID: BCGA3267 IC: 579C-A3267	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210073-23.BCG	Test Dates: 10/25/2024 - 1/6/2025	EUT Type: Tablet Device	Page 70 of 262

V 10.6 10/27/2023

7.4.2 Antenna 3c Power Spectral Density Measurements – LPI


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm/MHz]	Antenna Gain [dBi]	e.i.r.p Density [dBm/MHz]	Max EIRP Density [dBm/MHz]	Margin [dB]
Band 5	5955	1	a	54	-3.34	1.80	-1.54	-1	-0.54
	6175	45	a	24	-3.71	1.80	-1.91	-1	-0.91
	6415	93	a	54	-3.71	1.80	-1.91	-1	-0.91
	5955	1	ax (20MHz)	135/143.4 (MCS11)	-3.23	1.80	-1.43	-1	-0.43
	6175	45	ax (20MHz)	49/51.6 (MCS4)	-3.71	1.80	-1.91	-1	-0.91
	6415	93	ax (20MHz)	135/143.4 (MCS11)	-3.85	1.80	-2.05	-1	-1.05
	5965	3	ax (40MHz)	271/286.8 (MCS11)	-3.05	1.80	-1.25	-1	-0.25
	6165	43	ax (40MHz)	271/286.8 (MCS11)	-3.36	1.80	-1.56	-1	-0.56
	6405	91	ax (40MHz)	49/51.6 (MCS2)	-3.85	1.80	-2.05	-1	-1.05
	5985	7	ax (80MHz)	204/216.2 (MCS4)	-3.53	1.80	-1.73	-1	-0.73
	6145	39	ax (80MHz)	567/600.5 (MCS11)	-3.64	1.80	-1.84	-1	-0.84
	6385	87	ax (80MHz)	567/600.5 (MCS11)	-3.62	1.80	-1.82	-1	-0.82
	6025	15	ax (160MHz)	1020.8/1201 (MCS11)	-3.12	1.80	-1.32	-1	-0.32
	6185	47	ax (160MHz)	1020.8/1201 (MCS11)	-3.61	1.80	-1.81	-1	-0.81
Band 6	6345	79	ax (160MHz)	1020.8/1201 (MCS11)	-4.20	1.80	-2.40	-1	-1.40
	6435	97	a	54	-3.93	2.10	-1.83	-1	-0.83
	6475	105	a	54	-3.93	2.10	-1.83	-1	-0.83
	6515	113	a	54	-3.86	2.10	-1.76	-1	-0.76
	6435	97	ax (20MHz)	135/143.4 (MCS11)	-3.94	2.10	-1.84	-1	-0.84
	6475	105	ax (20MHz)	135/143.4 (MCS11)	-3.80	2.10	-1.70	-1	-0.70
	6515	113	ax (20MHz)	49/51.6 (MCS4)	-3.99	2.10	-1.89	-1	-0.89
	6445	99	ax (40MHz)	271/286.8 (MCS11)	-3.69	2.10	-1.59	-1	-0.59
	6485	107	ax (40MHz)	271/286.8 (MCS11)	-4.02	2.10	-1.92	-1	-0.92
	6525	115	ax (40MHz)	98/103.2 (MCS4)	-4.66	2.10	-2.56	-1	-1.56
Band 7	6465	103	ax (80MHz)	567/600.5 (MCS11)	-4.08	2.10	-1.98	-1	-0.98
	6505	111	ax (160MHz)	367.5/432.4 (MCS4)	-5.18	2.10	-3.08	-1	-2.08
	6535	117	a	54	-4.81	3.00	-1.81	-1	-0.81
	6695	149	a	54	-4.61	3.00	-1.61	-1	-0.61
	6875	185	a	24	-4.90	3.00	-1.90	-1	-0.90
	6535	117	ax (20MHz)	24/25.8 (MCS2)	-4.87	3.00	-1.87	-1	-0.87
	6695	149	ax (20MHz)	135/143.4 (MCS11)	-4.33	3.00	-1.33	-1	-0.33
	6875	185	ax (20MHz)	135/143.4 (MCS11)	-4.69	3.00	-1.69	-1	-0.69
	6565	123	ax (40MHz)	271/286.8 (MCS11)	-4.76	3.00	-1.76	-1	-0.76
	6725	155	ax (40MHz)	98/103.2 (MCS4)	-4.27	3.00	-1.27	-1	-0.27
	6845	179	ax (40MHz)	49/51.6 (MCS2)	-4.24	3.00	-1.24	-1	-0.24
	6545	119	ax (80MHz)	204/216.2 (MCS4)	-4.57	3.00	-1.57	-1	-0.57
	6705	151	ax (80MHz)	567/600.5 (MCS11)	-4.53	3.00	-1.53	-1	-0.53
	6865	183	ax (80MHz)	204/216.2 (MCS4)	-5.01	3.00	-2.01	-1	-1.01
Band 8	6665	143	ax (160MHz)	367.5/432.4 (MCS4)	-4.81	3.00	-1.81	-1	-0.81
	6825	175	ax (160MHz)	1020.8/1201 (MCS11)	-4.87	3.00	-1.87	-1	-0.87
	6895	189	a	54	-5.10	3.30	-1.80	-1	-0.80
	6995	209	a	54	-4.85	3.30	-1.55	-1	-0.55
	7115	233	a	54	-5.46	3.30	-2.16	-1	-1.16
	6895	189	ax (20MHz)	49/51.6 (MCS4)	-4.92	3.30	-1.62	-1	-0.62
	6995	209	ax (20MHz)	135/143.4 (MCS11)	-5.00	3.30	-1.70	-1	-0.70
	7115	233	ax (20MHz)	135/143.4 (MCS11)	-5.18	3.30	-1.88	-1	-0.88
	6885	187	ax (40MHz)	271/286.8 (MCS11)	-4.87	3.30	-1.57	-1	-0.57
	7005	211	ax (40MHz)	49/51.6 (MCS2)	-4.86	3.30	-1.56	-1	-0.56
	7085	227	ax (40MHz)	271/286.8 (MCS11)	-4.84	3.30	-1.54	-1	-0.54
	6945	199	ax (80MHz)	49/51.6 (MCS4)	-4.93	3.30	-1.63	-1	-0.63
	7025	215	ax (80MHz)	204/216.2 (MCS4)	-5.06	3.30	-1.76	-1	-0.76
	6985	207	ax (160MHz)	183.8/216.2 (MCS2)	-5.17	3.30	-1.87	-1	-0.87

Table 7-49. Power Spectral Density Measurements Antenna 3c


FCC ID: BCGA3267 IC: 579C-A3267		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210073-23.BCG	Test Dates: 10/25/2024 - 1/6/2025	EUT Type: Tablet Device	Page 71 of 262

V 10.6 10/27/2023


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

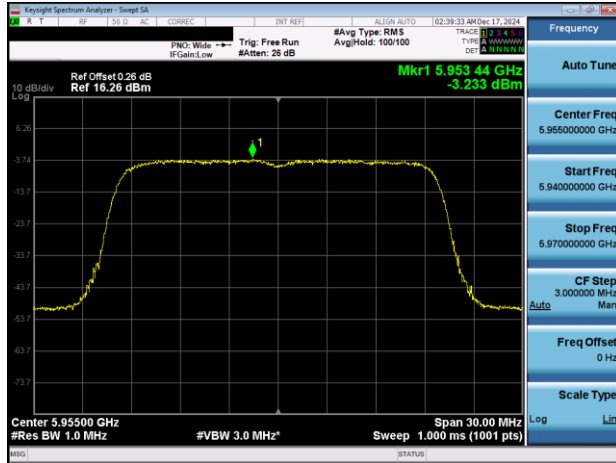


Plot 7-97. Power Spectral Density Plot Antenna 3c (20MHz) 802.11ax (UNII Band 5) - Ch. 1)

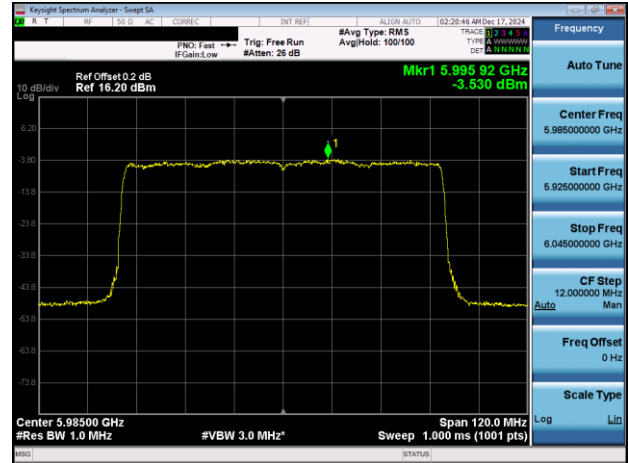

Plot 7-99. Power Spectral Density Plot Antenna 3c (80MHz) 802.11ax (UNII Band 5) - Ch. 7)

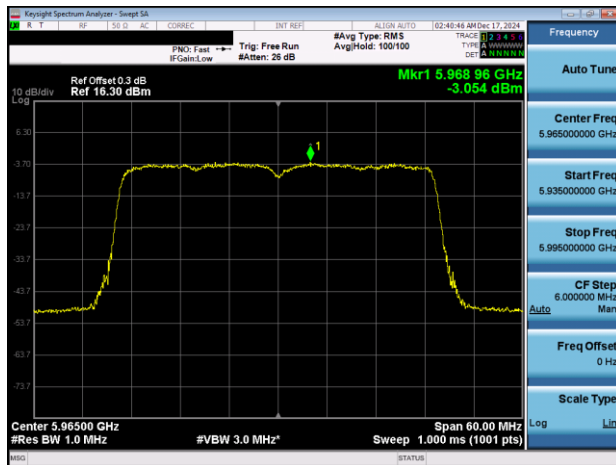


Plot 7-98. Power Spectral Density Plot Antenna 3c (40MHz) 802.11ax (UNII Band 5) - Ch. 3)

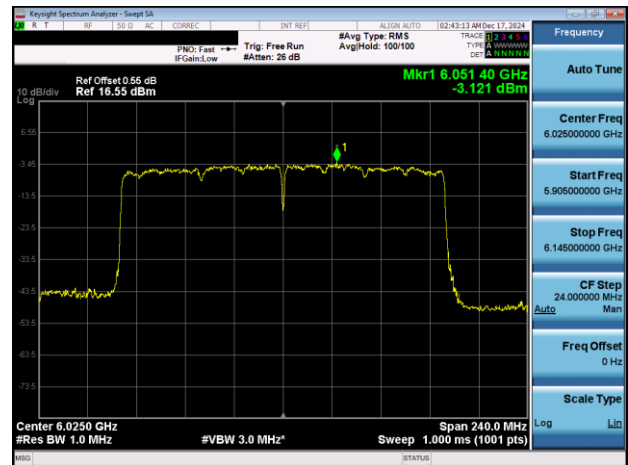


Plot 7-100. Power Spectral Density Plot Antenna 3c (160MHz) 802.11ax (UNII Band 5) - Ch. 15)


FCC ID: BCGA3267 IC: 579C-A3267		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210073-23.BCG	Test Dates: 10/25/2024 - 1/6/2025	EUT Type: Tablet Device	Page 72 of 262

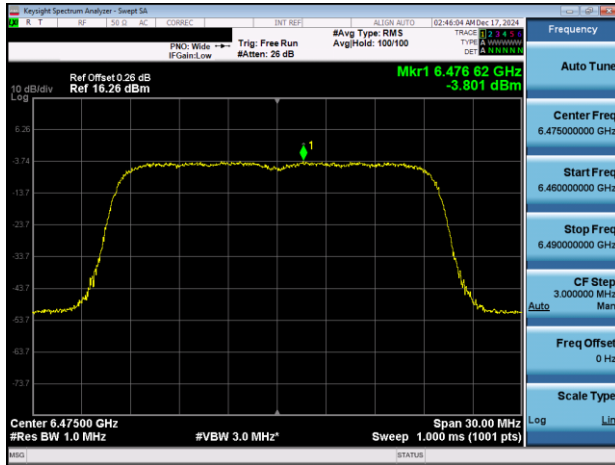


Plot 7-101. Power Spectral Density Plot Antenna 3c (20MHz 802.11ax (UNII Band 6) – Ch. 105)

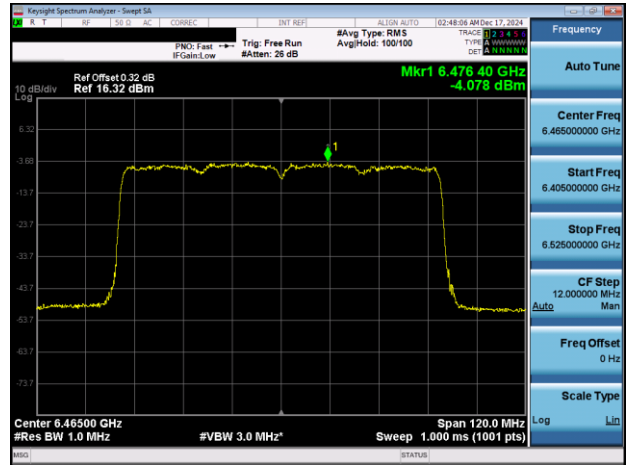

Plot 7-103. Power Spectral Density Plot Antenna 3c (80MHz 802.11ax (UNII Band 6) – Ch. 103)

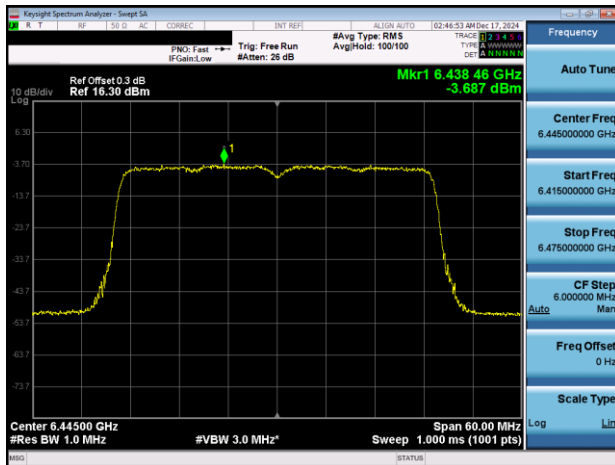


Plot 7-102. Power Spectral Density Plot Antenna 3c (40MHz 802.11ax (UNII Band 6) – Ch. 99)

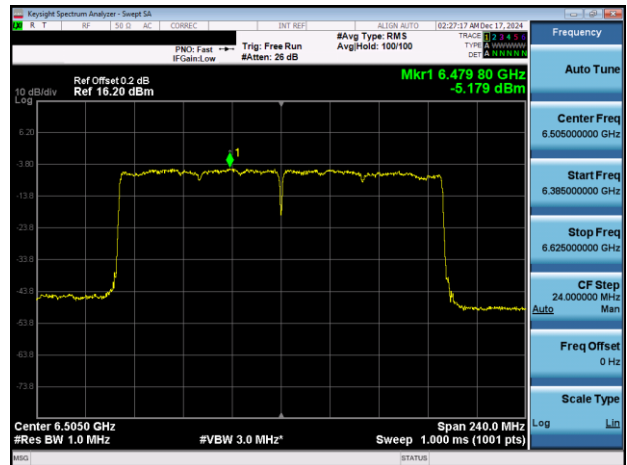


Plot 7-104. Power Spectral Density Plot Antenna 3c (160MHz 802.11ax (UNII Band 6) – Ch. 111)


FCC ID: BCGA3267 IC: 579C-A3267	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210073-23.BCG	Test Dates: 10/25/2024 - 1/6/2025	EUT Type: Tablet Device	Page 73 of 262

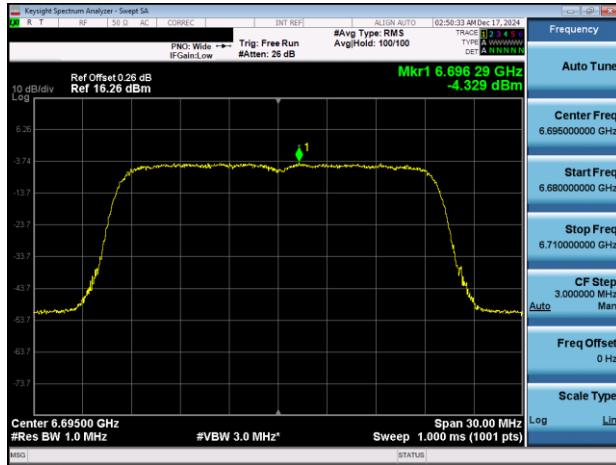


Plot 7-105. Power Spectral Density Plot Antenna 3c (20MHz 802.11ax (UNII Band 7) – Ch. 149)

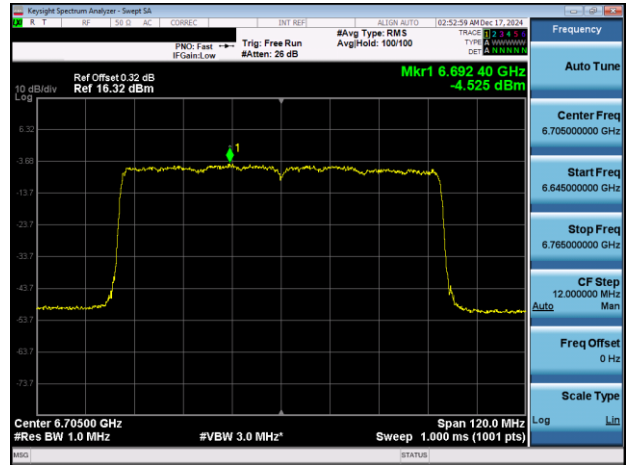

Plot 7-107. Power Spectral Density Plot Antenna 3c (80MHz 802.11ax (UNII Band 7) – Ch. 151)

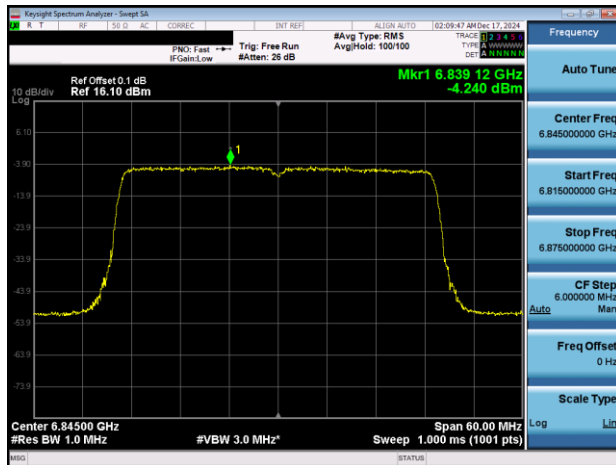


Plot 7-106. Power Spectral Density Plot Antenna 3c (40MHz 802.11ax (UNII Band 7) – Ch. 179)

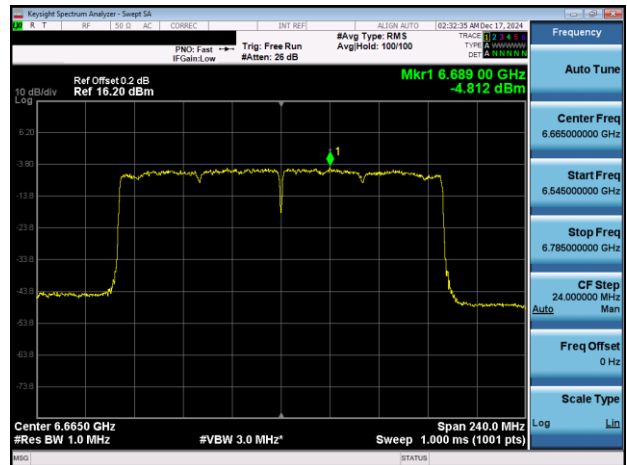


Plot 7-108. Power Spectral Density Plot Antenna 3c (160MHz 802.11ax (UNII Band 7) – Ch. 143)


FCC ID: BCGA3267 IC: 579C-A3267		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210073-23.BCG	Test Dates: 10/25/2024 - 1/6/2025	EUT Type: Tablet Device	Page 74 of 262

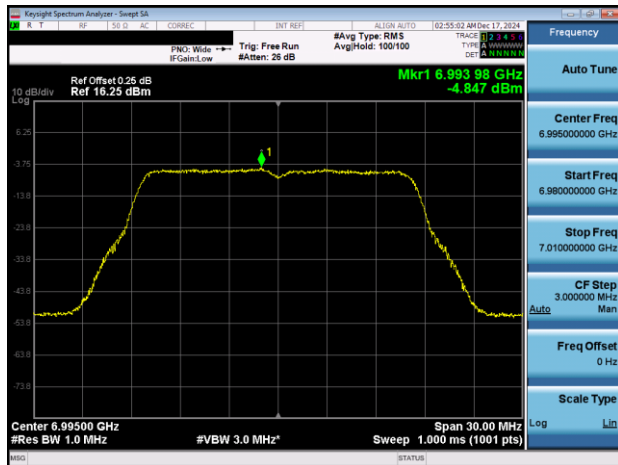


Plot 7-109. Power Spectral Density Plot Antenna 3c (20MHz 802.11a (UNII Band 8) – Ch. 209)

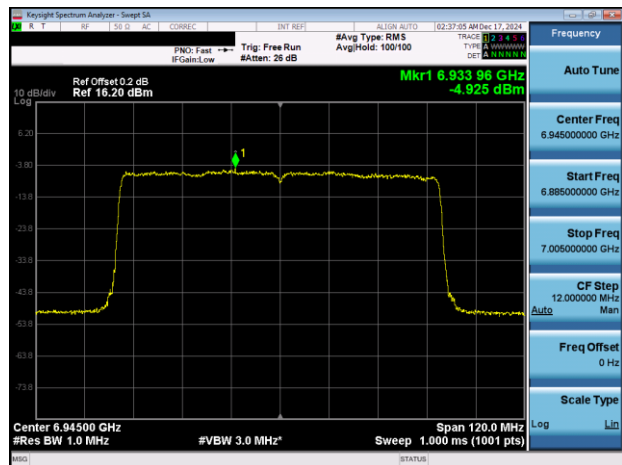

Plot 7-111. Power Spectral Density Plot Antenna 3c (80MHz 802.11ax (UNII Band 8) – Ch. 199)

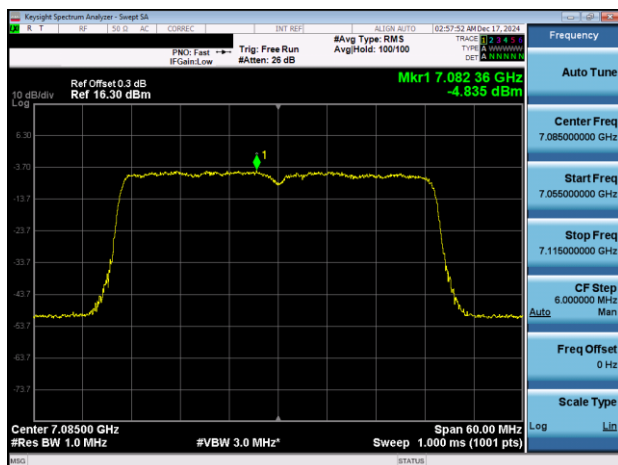

Plot 7-110. Power Spectral Density Plot Antenna 3c (40MHz 802.11ax (UNII Band 8) – Ch. 227)

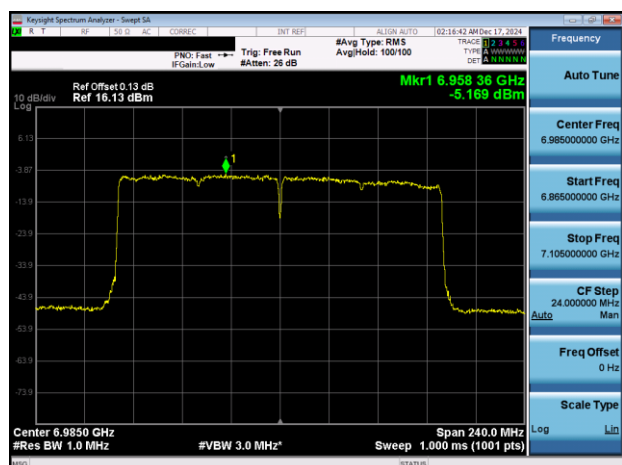

Plot 7-112. Power Spectral Density Plot Antenna 3c (160MHz 802.11ax (UNII Band 8) – Ch. 207)

FCC ID: BCGA3267 IC: 579C-A3267		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210073-23.BCG	Test Dates: 10/25/2024 - 1/6/2025	EUT Type: Tablet Device	Page 75 of 262


7.4.3 Antenna 3a Power Spectral Density Measurements – SP

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm/MHz]	Antenna Gain [dBi]	e.i.r.p Density [dBm/MHz]	Max EIRP Density [dBm/MHz]	Margin [dB]
Band 5	5955	1	a	54	8.46	0.50	8.96	17	-8.04
	6175	45	a	54	8.89	0.50	9.39	17	-7.61
	6415	93	a	54	9.14	0.50	9.64	17	-7.36
	5955	1	ax (20MHz)	49/51.6 (MCS4)	7.89	0.50	8.39	17	-8.61
	6175	45	ax (20MHz)	135/143.4 (MCS11)	8.57	0.50	9.07	17	-7.93
	6415	93	ax (20MHz)	135/143.4 (MCS11)	8.79	0.50	9.29	17	-7.71
	5965	3	ax (40MHz)	271/286.8 (MCS11)	5.04	0.50	5.54	17	-11.46
	6165	43	ax (40MHz)	98/103.2 (MCS4)	5.41	0.50	5.91	17	-11.09
	6405	91	ax (40MHz)	271/286.8 (MCS11)	5.83	0.50	6.33	17	-10.67
	5985	7	ax (80MHz)	102/108.1 (MCS2)	2.27	0.50	2.77	17	-14.23
	6145	39	ax (80MHz)	204/216.2 (MCS4)	2.79	0.50	3.29	17	-13.71
	6385	87	ax (80MHz)	567/600.5 (MCS11)	3.09	0.50	3.59	17	-13.41
	6025	15	ax (160MHz)	1020.8/1201 (MCS11)	0.34	0.50	0.84	17	-16.16
	6181	47	ax (160MHz)	367.5/432.4 (MCS4)	0.55	0.50	1.05	17	-15.95
	6345	79	ax (160MHz)	1020.8/1201 (MCS11)	-0.18	0.50	0.32	17	-16.68
Band 6	6435	97	a	54	9.02	-1.30	7.72	17	-9.28
	6475	105	a	54	8.49	-1.30	7.19	17	-9.81
	6515	113	a	24	8.87	-1.30	7.57	17	-9.43
	6435	97	ax (20MHz)	135/143.4 (MCS11)	8.37	-1.30	7.07	17	-9.93
	6475	105	ax (20MHz)	135/143.4 (MCS11)	8.31	-1.30	7.01	17	-9.99
	6515	113	ax (20MHz)	49/51.6 (MCS4)	8.12	-1.30	6.82	17	-10.18
	6445	99	ax (40MHz)	271/286.8 (MCS11)	5.30	-1.30	4.00	17	-13.00
	6485	107	ax (40MHz)	271/286.8 (MCS11)	5.37	-1.30	4.07	17	-12.93
	6525	115	ax (40MHz)	98/103.2 (MCS4)	5.42	-1.30	4.12	17	-12.88
	6465	103	ax (80MHz)	567/600.5 (MCS11)	2.26	-1.30	0.96	17	-16.04
Band 7	6505	111	ax (160MHz)	1020.8/1201 (MCS11)	-0.24	-1.30	-1.54	17	-18.54
	6535	117	a	54	8.74	-0.80	7.94	17	-9.06
	6695	149	a	54	8.68	-0.80	7.88	17	-9.12
	6875	181	a	54	8.68	-0.80	7.88	17	-9.12
	6535	117	ax (20MHz)	135/143.4 (MCS11)	8.41	-0.80	7.61	17	-9.40
	6695	149	ax (20MHz)	49/51.6 (MCS4)	8.61	-0.80	7.81	17	-9.19
	6875	181	ax (20MHz)	49/51.6 (MCS4)	8.57	-0.80	7.77	17	-9.23
	6565	123	ax (40MHz)	271/286.8 (MCS11)	5.87	-0.80	5.07	17	-11.93
	6725	155	ax (40MHz)	271/286.8 (MCS11)	5.37	-0.80	4.57	17	-12.43
	6845	179	ax (40MHz)	98/103.2 (MCS4)	5.59	-0.80	4.79	17	-12.21
	6545	135	ax (80MHz)	102/108.1 (MCS2)	2.46	-0.80	1.66	17	-15.34
	6705	151	ax (80MHz)	567/600.5 (MCS11)	2.82	-0.80	2.02	17	-14.98
	6865	167	ax (80MHz)	204/216.2 (MCS4)	2.25	-0.80	1.45	17	-15.55
	6665	143	ax (160MHz)	367.5/432.4 (MCS4)	0.31	-0.80	-0.49	17	-17.49


Table 7-50. Power Spectral Density Measurements Antenna 3a

FCC ID: BCGA3267 IC: 579C-A3267	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210073-23.BCG	Test Dates: 10/25/2024 - 1/6/2025	EUT Type: Tablet Device	Page 76 of 262


V 10.6 10/27/2023

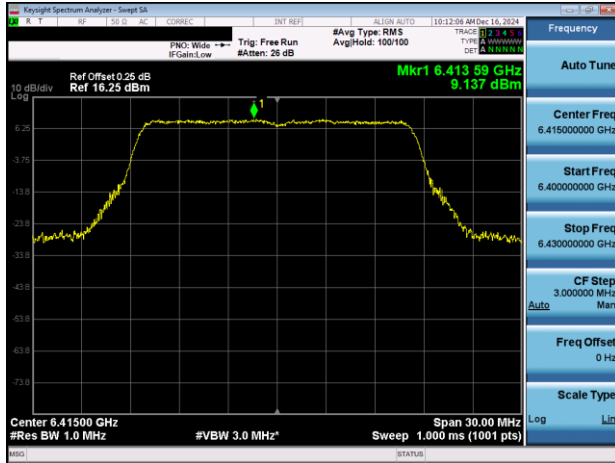


Plot 7-113. Power Spectral Density Plot Antenna 3a (20MHz 802.11a (UNII Band 5) – Ch. 93)

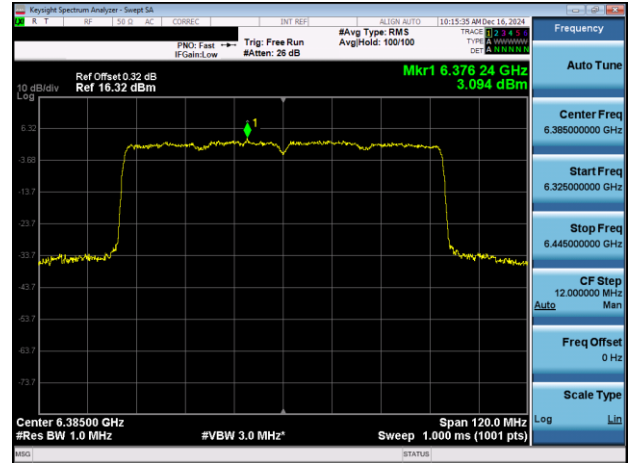

Plot 7-115. Power Spectral Density Plot Antenna 3a (80MHz 802.11ax (UNII Band 5) – Ch. 87)

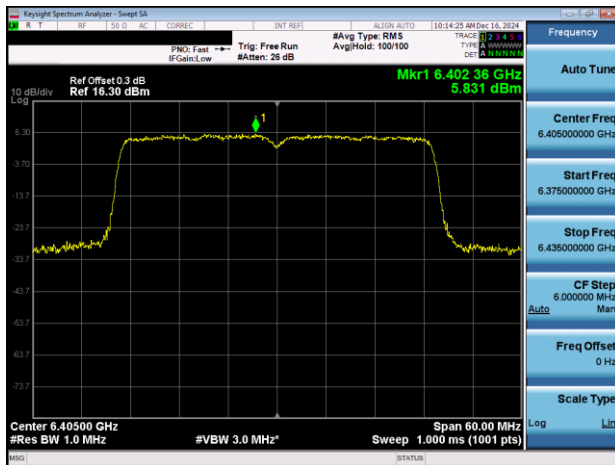


Plot 7-114. Power Spectral Density Plot Antenna 3a (40MHz 802.11ax (UNII Band 5) – Ch. 91)

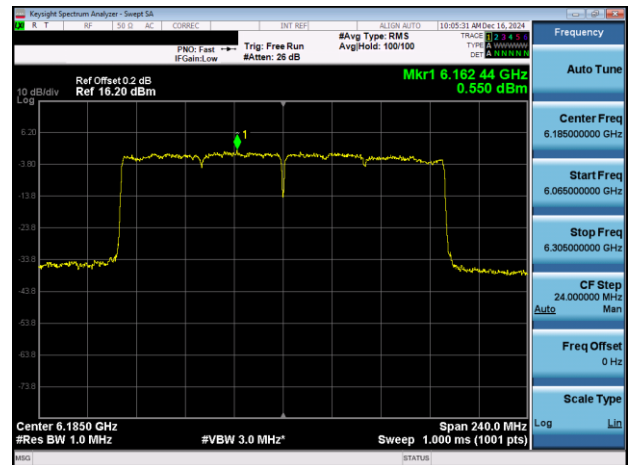


Plot 7-116. Power Spectral Density Plot Antenna 3a (160MHz 802.11ax (UNII Band 5) – Ch. 47)


FCC ID: BCGA3267 IC: 579C-A3267	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210073-23.BCG	Test Dates: 10/25/2024 - 1/6/2025	EUT Type: Tablet Device	Page 77 of 262

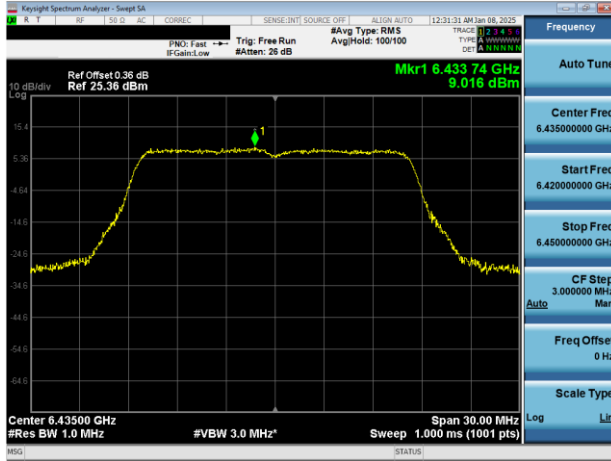


Plot 7-117. Power Spectral Density Plot Antenna 3a (20MHz 802.11a (UNII Band 6) – Ch. 97)

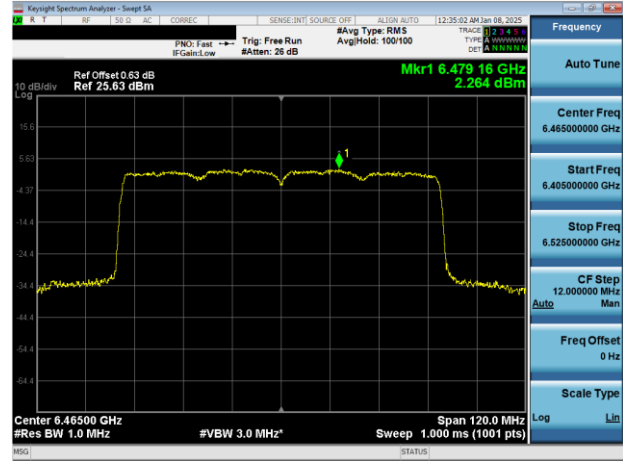

Plot 7-119. Power Spectral Density Plot Antenna 3a (80MHz 802.11ax (UNII Band 6) – Ch. 103)

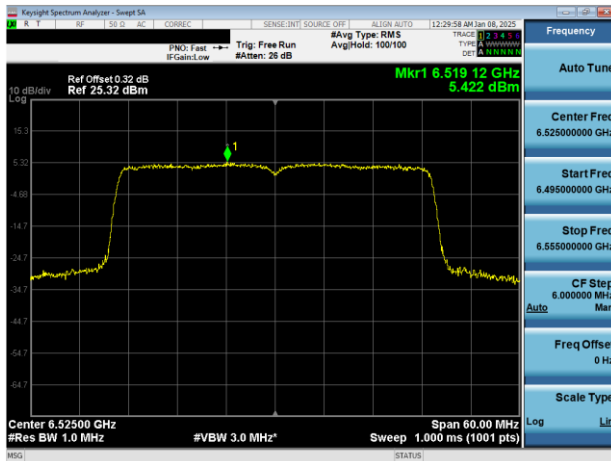


Plot 7-118. Power Spectral Density Plot Antenna 3a (40MHz 802.11ax (UNII Band 6) – Ch. 115)

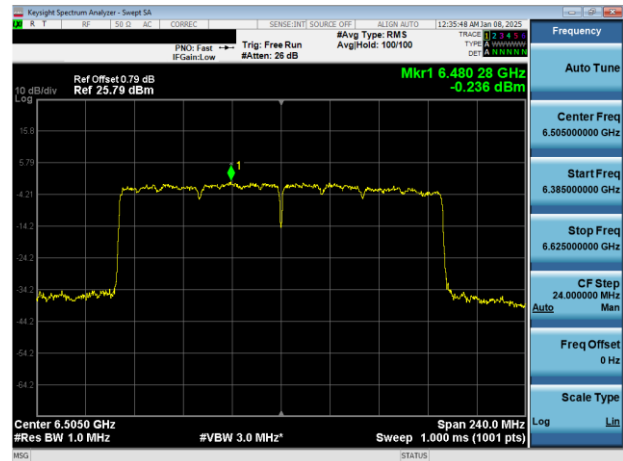


Plot 7-120. Power Spectral Density Plot Antenna 3a (160MHz 802.11ax (UNII Band 6) – Ch. 111)

FCC ID: BCGA3267 IC: 579C-A3267		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210073-23.BCG			Page 78 of 262


V 10.6 10/27/2023

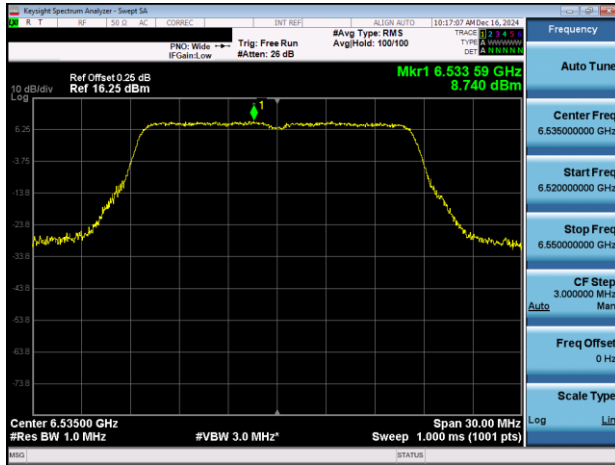


Plot 7-121. Power Spectral Density Plot Antenna 3a (20MHz 802.11a (UNII Band 7) – Ch. 117)

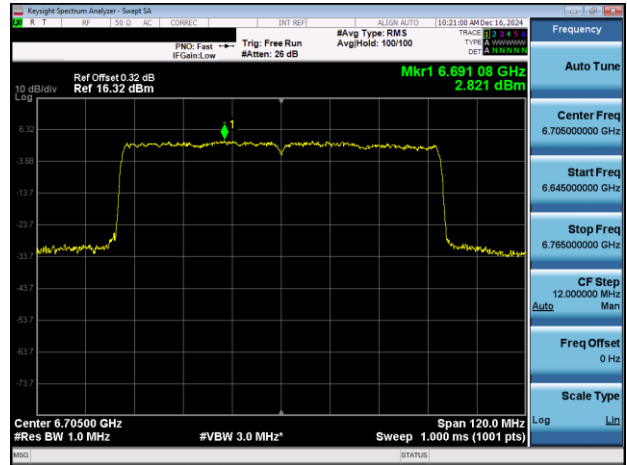

Plot 7-123. Power Spectral Density Plot Antenna 3a (80MHz 802.11ax (UNII Band 7) – Ch. 151)

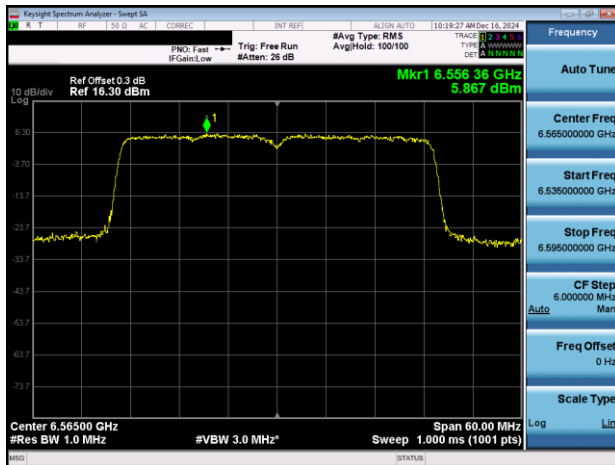

Plot 7-122. Power Spectral Density Plot Antenna 3a (40MHz 802.11ax (UNII Band 7) – Ch. 123)

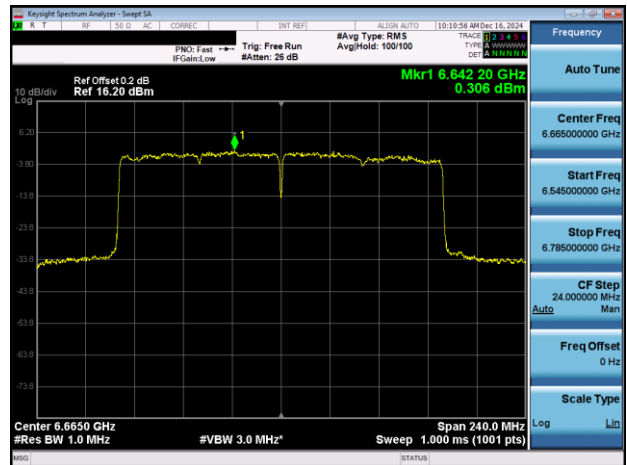

Plot 7-124. Power Spectral Density Plot Antenna 3a (160MHz 802.11ax (UNII Band 7) – Ch. 143)

FCC ID: BCGA3267 IC: 579C-A3267	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210073-23.BCG	Test Dates: 10/25/2024 - 1/6/2025	EUT Type: Tablet Device	Page 79 of 262


7.4.4 Antenna 3a Power Spectral Density Measurements – LPI

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm/MHz]	Antenna Gain [dBi]	e.i.r.p Density [dBm/MHz]	Max EIRP Density [dBm/MHz]	Margin [dB]
Band 5	5955	1	a	24	-3.28	0.50	-2.78	-1	-1.78
	6175	45	a	12	-3.53	0.50	-3.03	-1	-2.03
	6415	93	a	54	-4.12	0.50	-3.62	-1	-2.62
	5955	1	ax (20MHz)	49/51.6 (MCS4)	-3.36	0.50	-2.86	-1	-1.86
	6175	45	ax (20MHz)	135/143.4 (MCS11)	-3.23	0.50	-2.73	-1	-1.73
	6415	93	ax (20MHz)	24/25.8 (MCS2)	-3.96	0.50	-3.46	-1	-2.46
	5965	3	ax (40MHz)	271/286.8 (MCS11)	-3.13	0.50	-2.63	-1	-1.63
	6165	43	ax (40MHz)	49/51.6 (MCS2)	-3.47	0.50	-2.97	-1	-1.97
	6405	91	ax (40MHz)	271/286.8 (MCS11)	-3.43	0.50	-2.93	-1	-1.93
	5985	7	ax (80MHz)	102/108.1 (MCS2)	-3.35	0.50	-2.85	-1	-1.85
	6145	39	ax (80MHz)	567/600.5 (MCS11)	-3.69	0.50	-3.19	-1	-2.19
	6385	87	ax (80MHz)	204/216.2 (MCS4)	-3.77	0.50	-3.27	-1	-2.27
	6025	15	ax (160MHz)	183.8/216.2 (MCS2)	-3.17	0.50	-2.67	-1	-1.67
	6185	47	ax (160MHz)	1020.8/1201 (MCS11)	-3.36	0.50	-2.86	-1	-1.86
Band 6	6345	79	ax (160MHz)	1020.8/1201 (MCS11)	-3.97	0.50	-3.47	-1	-2.47
	6435	97	a	54	-4.06	-1.30	-5.36	-1	-4.36
	6475	105	a	54	-3.89	-1.30	-5.19	-1	-4.19
	6515	113	a	54	-3.77	-1.30	-5.07	-1	-4.07
	6435	97	ax (20MHz)	135/143.4 (MCS11)	-3.74	-1.30	-5.04	-1	-4.04
	6475	105	ax (20MHz)	135/143.4 (MCS11)	-4.17	-1.30	-5.47	-1	-4.47
	6515	113	ax (20MHz)	24/25.8 (MCS2)	-4.05	-1.30	-5.35	-1	-4.35
	6445	99	ax (40MHz)	98/103.2 (MCS4)	-3.78	-1.30	-5.08	-1	-4.08
	6485	107	ax (40MHz)	98/103.2 (MCS4)	-3.92	-1.30	-5.22	-1	-4.22
	6525	115	ax (40MHz)	98/103.2 (MCS4)	-4.43	-1.30	-5.73	-1	-4.73
Band 7	6465	103	ax (80MHz)	204/216.2 (MCS4)	-4.07	-1.30	-5.37	-1	-4.37
	6505	111	ax (160MHz)	1020.8/1201 (MCS11)	-5.04	-1.30	-6.34	-1	-5.34
	6535	117	a	54	-4.78	-0.80	-5.58	-1	-4.58
	6695	149	a	12	-4.62	-0.80	-5.42	-1	-4.42
	6875	185	a	54	-4.86	-0.80	-5.66	-1	-4.66
	6535	117	ax (20MHz)	49/51.6 (MCS4)	-4.78	-0.80	-5.58	-1	-4.58
	6695	149	ax (20MHz)	24/25.8 (MCS2)	-4.41	-0.80	-5.21	-1	-4.21
	6875	185	ax (20MHz)	49/51.6 (MCS4)	-5.11	-0.80	-5.91	-1	-4.91
	6565	123	ax (40MHz)	271/286.8 (MCS11)	-4.56	-0.80	-5.36	-1	-4.36
	6725	155	ax (40MHz)	98/103.2 (MCS4)	-4.33	-0.80	-5.13	-1	-4.13
	6845	179	ax (40MHz)	98/103.2 (MCS4)	-4.37	-0.80	-5.17	-1	-4.17
	6545	119	ax (80MHz)	567/600.5 (MCS11)	-4.49	-0.80	-5.29	-1	-4.29
	6705	151	ax (80MHz)	102/108.1 (MCS2)	-4.76	-0.80	-5.56	-1	-4.56
	6865	183	ax (80MHz)	102/108.1 (MCS2)	-5.16	-0.80	-5.96	-1	-4.96
Band 8	6665	143	ax (160MHz)	1020.8/1201 (MCS11)	-4.00	-0.80	-4.80	-1	-3.80
	6825	175	ax (160MHz)	183.8/216.2 (MCS2)	-5.37	-0.80	-6.17	-1	-5.17
	6895	189	a	54	-5.02	-1.70	-6.72	-1	-5.72
	6995	209	a	54	-4.97	-1.70	-6.67	-1	-5.67
	7115	233	a	54	-4.89	-1.70	-6.59	-1	-5.59
	6895	189	ax (20MHz)	135/143.4 (MCS11)	-5.13	-1.70	-6.83	-1	-5.83
	6995	209	ax (20MHz)	135/143.4 (MCS11)	-4.94	-1.70	-6.64	-1	-5.64
	7115	233	ax (20MHz)	49/51.6 (MCS4)	-5.06	-1.70	-6.76	-1	-5.76
	6885	187	ax (40MHz)	271/286.8 (MCS11)	-4.59	-1.70	-6.29	-1	-5.29
	7005	211	ax (40MHz)	271/286.8 (MCS11)	-4.81	-1.70	-6.51	-1	-5.51
	7085	227	ax (40MHz)	271/286.8 (MCS11)	-4.96	-1.70	-6.66	-1	-5.66
	6945	199	ax (80MHz)	204/216.2 (MCS4)	-4.84	-1.70	-6.54	-1	-5.54
	7025	215	ax (80MHz)	204/216.2 (MCS4)	-5.24	-1.70	-6.94	-1	-5.94
	6985	207	ax (160MHz)	367.5/432.4 (MCS4)	-5.07	-1.70	-6.77	-1	-5.77


Table 7-51. Power Spectral Density Measurements Antenna 3a

FCC ID: BCGA3267 IC: 579C-A3267		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210073-23.BCG	Test Dates: 10/25/2024 - 1/6/2025	EUT Type: Tablet Device	Page 80 of 262


V 10.6 10/27/2023

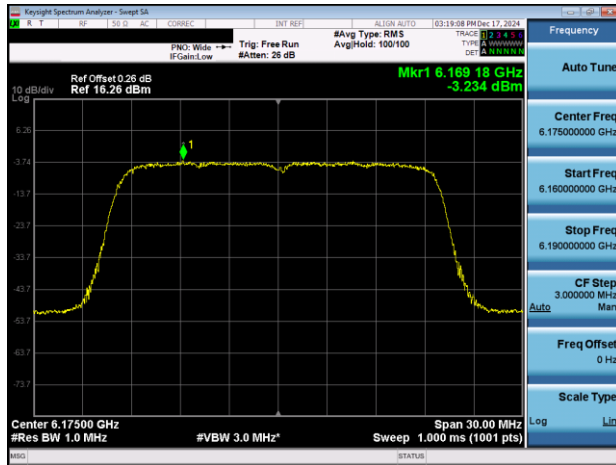


Plot 7-125. Power Spectral Density Plot Antenna 3a (20MHz 802.11ax (UNII Band 5) – Ch. 45)

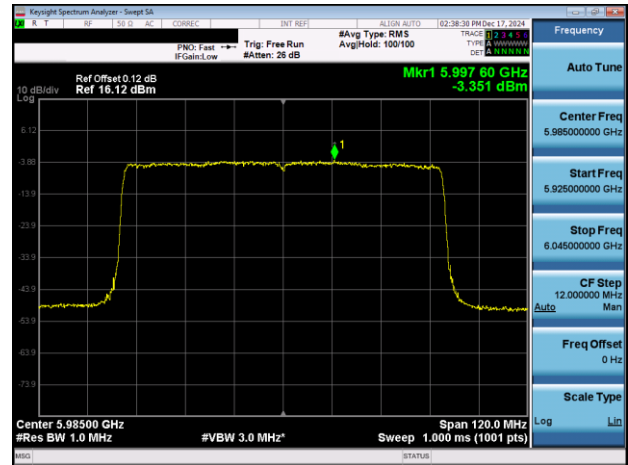

Plot 7-127. Power Spectral Density Plot Antenna 3a (80MHz 802.11ax (UNII Band 5) – Ch. 7)

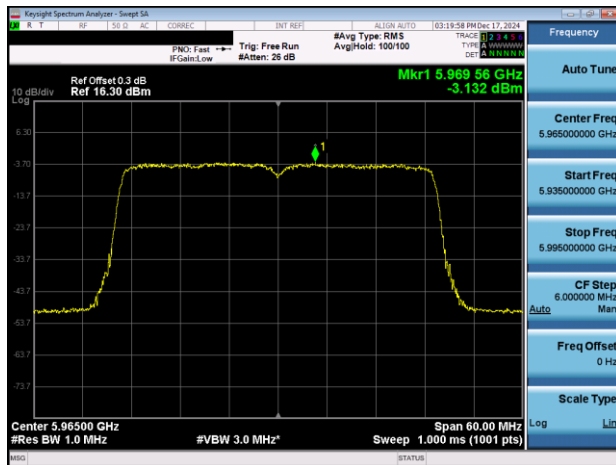


Plot 7-126. Power Spectral Density Plot Antenna 3a (40MHz 802.11ax (UNII Band 5) – Ch. 3)

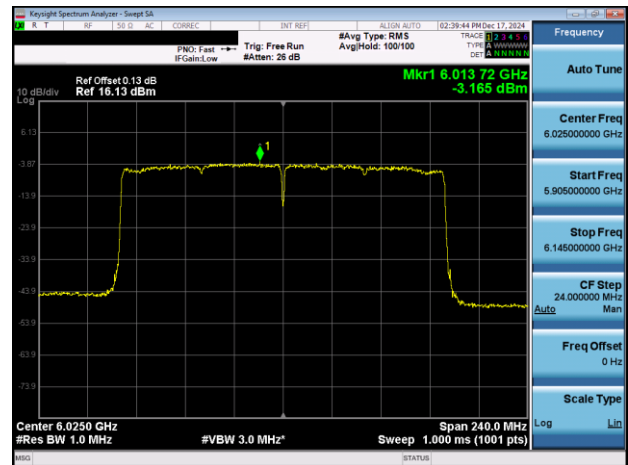


Plot 7-128. Power Spectral Density Plot Antenna 3a (160MHz 802.11ax (UNII Band 5) – Ch. 15)

FCC ID: BCGA3267 IC: 579C-A3267	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210073-23.BCG	Test Dates: 10/25/2024 - 1/6/2025	EUT Type: Tablet Device	Page 81 of 262


V 10.6 10/27/2023

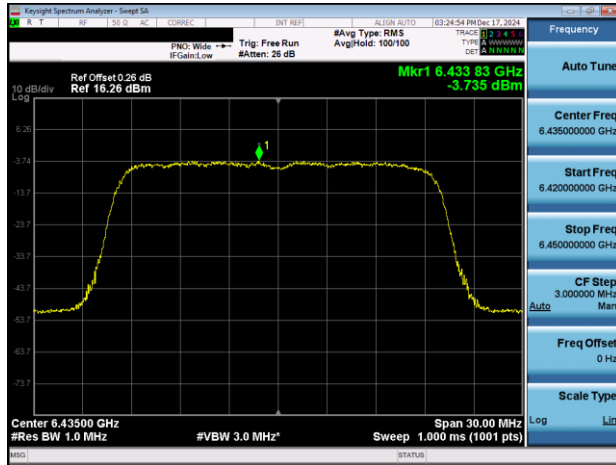


Plot 7-129. Power Spectral Density Plot Antenna 3a (20MHz 802.11ax (UNII Band 6) – Ch. 197)

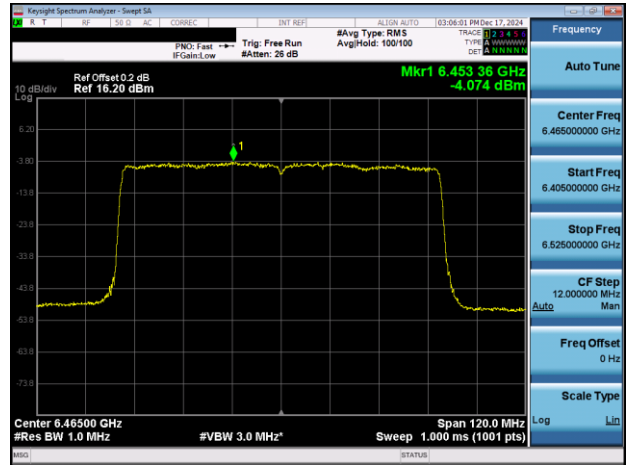

Plot 7-131. Power Spectral Density Plot Antenna 3a (80MHz 802.11ax (UNII Band 6) – Ch. 103)

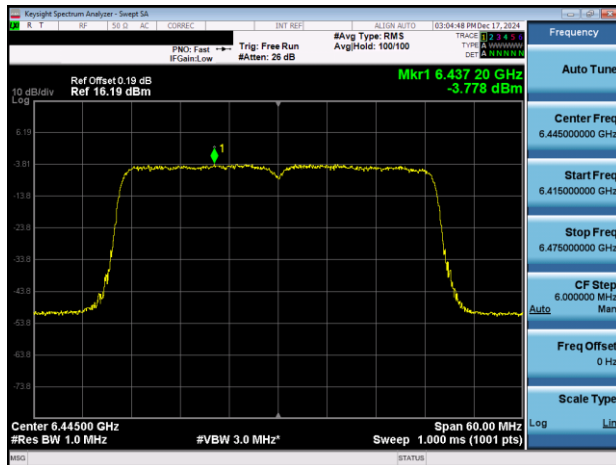

Plot 7-130. Power Spectral Density Plot Antenna 3a (40MHz 802.11ax (UNII Band 6) – Ch. 99)

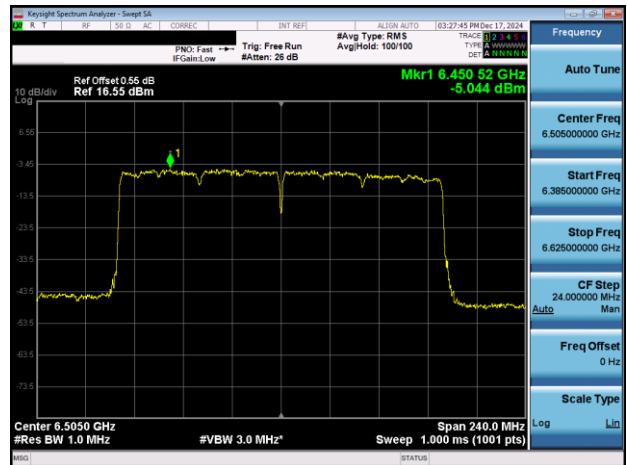

Plot 7-132. Power Spectral Density Plot Antenna 3a (160MHz 802.11ax (UNII Band 6) – Ch. 111)

FCC ID: BCGA3267 IC: 579C-A3267		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210073-23.BCG	Test Dates: 10/25/2024 - 1/6/2025	EUT Type: Tablet Device	Page 82 of 262