



Element Materials Technology

(formerly PCTEST)
18855 Adams Ct, Morgan Hill, CA 95037 USA
Tel. +1.408.538.5600
<http://www.element.com>



SAR EVALUATION REPORT

Applicant Name:

Apple Inc.
One Apple Park Way
Cupertino, CA 95014 USA

Date of Testing:

10/31/2024 – 12/09/2024

Test Report Issue Date:

1/28/2025

Test Site/Location:

Element, Morgan Hill, CA, USA

Document Serial No.:

1C2410210075-02.BCG-R2

FCC ID:

BCGA3269

APPLICANT:

APPLE, INC.

DUT Type:

Tablet Device

Application Type:

Certification

FCC Rule Part(s):

CFR §2.1093

Models:

A3269, A3271

Model	Band & Mode	Frequency	SAR
A3269	Band 1	700 MHz	0.001
A3269	Band 2	1900 MHz	0.001
A3269	Band 3	1900 MHz	0.001
A3269	Band 4	1900 MHz	0.001
A3269	Band 5	1900 MHz	0.001
A3269	Band 6	1900 MHz	0.001
A3269	Band 7	1900 MHz	0.001
A3269	Band 8	1900 MHz	0.001
A3269	Band 9	1900 MHz	0.001
A3269	Band 10	1900 MHz	0.001
A3269	Band 11	1900 MHz	0.001
A3269	Band 12	1900 MHz	0.001
A3269	Band 13	1900 MHz	0.001
A3269	Band 14	1900 MHz	0.001
A3269	Band 15	1900 MHz	0.001
A3269	Band 16	1900 MHz	0.001
A3269	Band 17	1900 MHz	0.001
A3269	Band 18	1900 MHz	0.001
A3269	Band 19	1900 MHz	0.001
A3269	Band 20	1900 MHz	0.001
A3269	Band 21	1900 MHz	0.001
A3269	Band 22	1900 MHz	0.001
A3269	Band 23	1900 MHz	0.001
A3269	Band 24	1900 MHz	0.001
A3269	Band 25	1900 MHz	0.001
A3269	Band 26	1900 MHz	0.001
A3269	Band 27	1900 MHz	0.001
A3269	Band 28	1900 MHz	0.001
A3269	Band 29	1900 MHz	0.001
A3269	Band 30	1900 MHz	0.001
A3269	Band 31	1900 MHz	0.001
A3269	Band 32	1900 MHz	0.001
A3269	Band 33	1900 MHz	0.001
A3269	Band 34	1900 MHz	0.001
A3269	Band 35	1900 MHz	0.001
A3269	Band 36	1900 MHz	0.001
A3269	Band 37	1900 MHz	0.001
A3269	Band 38	1900 MHz	0.001
A3269	Band 39	1900 MHz	0.001
A3269	Band 40	1900 MHz	0.001
A3269	Band 41	1900 MHz	0.001
A3269	Band 42	1900 MHz	0.001
A3269	Band 43	1900 MHz	0.001
A3269	Band 44	1900 MHz	0.001
A3269	Band 45	1900 MHz	0.001
A3269	Band 46	1900 MHz	0.001
A3269	Band 47	1900 MHz	0.001
A3269	Band 48	1900 MHz	0.001
A3269	Band 49	1900 MHz	0.001
A3269	Band 50	1900 MHz	0.001
A3269	Band 51	1900 MHz	0.001
A3269	Band 52	1900 MHz	0.001
A3269	Band 53	1900 MHz	0.001
A3269	Band 54	1900 MHz	0.001
A3269	Band 55	1900 MHz	0.001
A3269	Band 56	1900 MHz	0.001
A3269	Band 57	1900 MHz	0.001
A3269	Band 58	1900 MHz	0.001
A3269	Band 59	1900 MHz	0.001
A3269	Band 60	1900 MHz	0.001
A3269	Band 61	1900 MHz	0.001
A3269	Band 62	1900 MHz	0.001
A3269	Band 63	1900 MHz	0.001
A3269	Band 64	1900 MHz	0.001
A3269	Band 65	1900 MHz	0.001
A3269	Band 66	1900 MHz	0.001
A3269	Band 67	1900 MHz	0.001
A3269	Band 68	1900 MHz	0.001
A3269	Band 69	1900 MHz	0.001
A3269	Band 70	1900 MHz	0.001
A3269	Band 71	1900 MHz	0.001
A3269	Band 72	1900 MHz	0.001
A3269	Band 73	1900 MHz	0.001
A3269	Band 74	1900 MHz	0.001
A3269	Band 75	1900 MHz	0.001
A3269	Band 76	1900 MHz	0.001
A3269	Band 77	1900 MHz	0.001
A3269	Band 78	1900 MHz	0.001
A3269	Band 79	1900 MHz	0.001
A3269	Band 80	1900 MHz	0.001
A3269	Band 81	1900 MHz	0.001
A3269	Band 82	1900 MHz	0.001
A3269	Band 83	1900 MHz	0.001
A3269	Band 84	1900 MHz	0.001
A3269	Band 85	1900 MHz	0.001
A3269	Band 86	1900 MHz	0.001
A3269	Band 87	1900 MHz	0.001
A3269	Band 88	1900 MHz	0.001
A3269	Band 89	1900 MHz	0.001
A3269	Band 90	1900 MHz	0.001
A3269	Band 91	1900 MHz	0.001
A3269	Band 92	1900 MHz	0.001
A3269	Band 93	1900 MHz	0.001
A3269	Band 94	1900 MHz	0.001
A3269	Band 95	1900 MHz	0.001
A3269	Band 96	1900 MHz	0.001
A3269	Band 97	1900 MHz	0.001
A3269	Band 98	1900 MHz	0.001
A3269	Band 99	1900 MHz	0.001
A3269	Band 100	1900 MHz	0.001

Note: This revised Test Report supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.8 of this report; for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.

RJ Ortanez

Executive Vice President



The SAR Tick is an initiative of the Mobile & Wireless Forum (MWF). While a product may be considered eligible, use of the SAR Tick logo requires an agreement with the MWF. Further details can be obtained by emailing: sartick@mwfai.info.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 1 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

TABLE OF CONTENTS

1	DEVICE UNDER TEST	3
2	LTE AND NR INFORMATION	52
3	INTRODUCTION	54
4	DOSIMETRIC ASSESSMENT	55
5	TEST CONFIGURATION POSITIONS.....	56
6	RF EXPOSURE LIMITS	57
7	FCC MEASUREMENT PROCEDURES.....	59
8	RF CONDUCTED POWERS.....	65
9	SYSTEM VERIFICATION.....	199
10	SAR DATA SUMMARY	206
11	SAR MEASUREMENT VARIABILITY	243
12	ADDITIONAL TESTING PER FCC GUIDANCE	244
13	EQUIPMENT LIST.....	249
14	MEASUREMENT UNCERTAINTIES.....	250
15	CONCLUSION.....	253
16	REFERENCES	254
APPENDIX A: SAR TEST PLOTS		
APPENDIX B: SAR DIPOLE VERIFICATION PLOTS		
APPENDIX C: PROBE AND DIPOLE CALIBRATION CERTIFICATES		
APPENDIX D: SAR TISSUE SPECIFICATIONS		
APPENDIX E: MULTI-TX AND ANTENNA SAR CONSIDERATIONS		
APPENDIX F: LTE AND NR LOWER BANDWIDTH RF CONDUCTED POWERS		
APPENDIX G: SAR SYSTEM VALIDATION		
APPENDIX H: LTE DOWNLINK CA RF CONDUCTED POWERS		
APPENDIX I: 802.11AX RU SAR EXCLUSION		
APPENDIX J: DUT ANTENNA DIAGRAM & SAR TEST SETUP PHOTOGRAPHS		
APPENDIX K: WLAN TIME-AVERAGED SAR VERIFICATION		

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 2 of 255

REV 25.0
10/16/2024

1 DEVICE UNDER TEST

1.1 Device Overview

Band & Mode	Operating Modes	Tx Frequency
UMTS 850	Data	826.4 - 846.6 MHz
UMTS 1750	Data	1712.4 - 1752.6 MHz
UMTS 1900	Data	1852.4 - 1907.6 MHz
LTE Band 71	Data	665.5 - 695.5 MHz
LTE Band 12	Data	699.7 - 715.3 MHz
LTE Band 17	Data	706.5 - 713.5 MHz
LTE Band 13	Data	779.5 - 784.5 MHz
LTE Band 14	Data	790.5 - 795.5 MHz
LTE Band 26 (Cell)	Data	814.7 - 848.3 MHz
LTE Band 5 (Cell)	Data	824.7 - 848.3 MHz
LTE Band 66 (AWS)	Data	1710.7 - 1779.3 MHz
LTE Band 4 (AWS)	Data	1710.7 - 1754.3 MHz
LTE Band 25 (PCS)	Data	1850.7 - 1914.3 MHz
LTE Band 2 (PCS)	Data	1850.7 - 1909.3 MHz
LTE Band 30	Data	2307.5 - 2312.5 MHz
LTE Band 7	Data	2502.5 - 2567.5 MHz
LTE Band 41	Data	2498.5 - 2687.5 MHz
LTE Band 48	Data	3552.5 - 3697.5 MHz
NR Band n71	Data	665.5 - 695.5 MHz
NR Band n12	Data	701.5 - 713.5 MHz
NR Band n14	Data	790.5 - 795.5 MHz
NR Band n26 (Cell)	Data	816.5 - 846.5 MHz
NR Band n5 (Cell)	Data	826.5 - 846.5 MHz
NR Band n70	Data	1697.5 - 1707.5 MHz
NR Band n66 (AWS)	Data	1712.5 - 1777.5 MHz
NR Band n25 (PCS)	Data	1852.5 - 1912.5 MHz
NR Band n2 (PCS)	Data	1852.5 - 1907.5 MHz
NR Band n30	Data	2307.5 - 2312.5 MHz
NR Band n7	Data	2502.5 - 2567.5 MHz
NR Band n41	Data	2501.01 - 2685.0 MHz
NR Band n48	Data	3555.0 - 3694.98 MHz
NR Band n77 DoD	Data	3455.01 - 3544.98 MHz
NR Band n77 C	Data	3705.0 - 3975.0 MHz
2.4 GHz WLAN	Voice/Data	2412 - 2472 MHz
5 GHz WIFI	Voice/Data	U-NII-1: 5180 - 5240 MHz U-NII-2A: 5260 - 5320 MHz U-NII-2C: 5500 - 5720 MHz U-NII-3: 5745 - 5825 MHz
6 GHz WIFI	Voice/Data	U-NII-5: 5935 - 6415 MHz U-NII-6: 6435 - 6515 MHz U-NII-7: 6535 - 6875 MHz U-NII-8: 6895 - 7115 MHz
Bluetooth	Data	2402 - 2480 MHz
802.15.4	Data	2405 - 2475 MHz
NB UNII-1	Data	5162 - 5245 MHz
NB UNII-3	Data	5733 - 5844 MHz
WPT	N/A	13.56 MHz

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 3 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

1.2 Time-Averaging Algorithm for RF Exposure Compliance

This device is enabled with the Qualcomm® Smart Transmit Gen2 feature. This feature performs a time averaging algorithm in real time to control and manage transmitting power and ensure the time-averaged RF exposure is in compliance with FCC requirements all the time. Refer to Compliance Summary document for detailed description of Qualcomm® Smart Transmit feature (report SN could be found in Section 1.10 – Bibliography).

Note that WLAN operations are not enabled with Smart Transmit.

The Smart Transmit algorithm maintains the time-averaged transmit power, in turn, time-averaged RF exposure of SAR design_target, below the predefined time-averaged power limit (i.e., P_{limit} for sub-6 radio), for each characterized technology and band (see RF Exposure Part 0 Test Report, report SN could be found in Section 1.10 - Bibliography).

Smart Transmit allows the device to transmit at higher power instantaneously, as high as P_{max} , when needed, but enforces power limiting to maintain time-averaged transmit power to P_{limit} . Below table shows P_{limit} EFS settings and maximum tune up output power P_{max} configured for this EUT for various transmit conditions (Device State Index DSI).

1g SAR (W/kg)			
Mode/Band/Antenna	Smart Tx Uncertainty	SAR design target	SAR_regulatory_limit
LTE Band 71 Ant 2	0.8 dB	0.84 W/kg	1.6 W/kg
NR Band n71 Ant 2	0.8 dB	0.84 W/kg	
LTE Band 2 Ant 2	0.7 dB	0.86 W/kg	
LTE Band 25 Ant 2	0.7 dB	0.86 W/kg	
NR Band n2 Ant 2	0.7 dB	0.86 W/kg	
NR Band n25 Ant 2	0.7 dB	0.86 W/kg	
LTE Band 71 Ant 4	0.7 dB	0.86 W/kg	
LTE Band 12 Ant 4	0.7 dB	0.86 W/kg	
LTE Band 17 Ant 4	0.7 dB	0.86 W/kg	
LTE Band 13 Ant 4	0.7 dB	0.86 W/kg	
LTE Band 14 Ant 4	0.7 dB	0.86 W/kg	
NR Band n71 Ant 4	0.7 dB	0.86 W/kg	
NR Band n12 Ant 4	0.7 dB	0.86 W/kg	
NR Band n14 Ant 4	0.7 dB	0.86 W/kg	
LTE Band 26 Ant 2	0.9 dB	0.82 W/kg	
LTE Band 26 Ant 4	0.9 dB	0.82 W/kg	
NR Band n26 Ant 2	0.9 dB	0.82 W/kg	
NR Band n26 Ant 4	0.9 dB	0.82 W/kg	
All other modes/bands/antennas	1.0 dB	0.80 W/kg	

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 4 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

*Maximum tune up output power P_{max} is used to configure EUT during RF tune up procedure. The maximum allowed output power is equal to maximum Tune up output power +0.7/-1.0 dB conducted power tolerance and for UHB +/- 1.0 dB for conducted powers tolerance.

Exposure Scenario:	Ant 1a	Ant 1a	Ant 1b	Ant 1b	Ant 2	Ant 2	Ant 3a	Ant 3a	Ant 3b	Ant 3b	Ant 4	Ant 4
Averaging Volume:	1g	Maximum Tune up Output Power*	1g	Maximum Tune up Output Power*	1g	Maximum Tune up Output Power*	1g	Maximum Tune up Output Power*	1g	Maximum Tune up Output Power*	1g	Maximum Tune up Output Power*
DSI:	0 mm		0 mm		0 mm		0 mm		0 mm		0 mm	
	1		1		1		1		1		1	
Technology/Band	Plimit corresponding to SAR design target	Pmax	Plimit corresponding to SAR design target	Pmax	Plimit corresponding to SAR design target	Pmax	Plimit corresponding to SAR design target	Pmax	Plimit corresponding to SAR design target	Pmax	Plimit corresponding to SAR design target	Pmax
UMTS 850	N/A	N/A	N/A	N/A	18.90	24.00	N/A	N/A	N/A	N/A	19.00	25.00
UMTS 1750	N/A	N/A	N/A	N/A	14.50	23.00	N/A	N/A	N/A	N/A	14.30	25.00
UMTS 1900	N/A	N/A	11.30	22.00	14.60	23.00	N/A	N/A	11.90	24.00	13.40	25.00
LTE Band 71	N/A	N/A	N/A	N/A	20.30	24.00	N/A	N/A	N/A	N/A	20.30	25.00
LTE Band 12	N/A	N/A	N/A	N/A	18.90	24.00	N/A	N/A	N/A	N/A	18.80	25.00
LTE Band 17	N/A	N/A	N/A	N/A	18.90	24.00	N/A	N/A	N/A	N/A	18.80	25.00
LTE Band 13	N/A	N/A	N/A	N/A	19.40	24.00	N/A	N/A	N/A	N/A	20.60	25.00
LTE Band 14	N/A	N/A	N/A	N/A	19.40	24.00	N/A	N/A	N/A	N/A	21.10	25.00
LTE Band 26	N/A	N/A	N/A	N/A	18.80	24.00	N/A	N/A	N/A	N/A	19.10	25.00
LTE Band 5	N/A	N/A	N/A	N/A	18.90	24.00	N/A	N/A	N/A	N/A	19.00	25.00
LTE Band 5 ULCA	N/A	N/A	N/A	N/A	18.90	24.00	N/A	N/A	N/A	N/A	19.00	25.00
LTE Band 4	N/A	N/A	12.20	25.00	14.30	24.50	N/A	N/A	14.30	24.50	14.30	25.00
LTE Band 66	N/A	N/A	12.20	25.00	14.30	24.80	N/A	N/A	11.90	24.80	14.30	25.00
LTE Band 2	N/A	N/A	11.30	22.00	14.90	23.00	N/A	N/A	11.90	24.00	13.40	25.00
LTE Band 25	N/A	N/A	11.30	22.00	14.90	23.00	N/A	N/A	11.90	24.00	13.40	25.00
LTE Band 30	N/A	N/A	11.50	21.50	12.30	20.80	N/A	N/A	11.90	22.10	13.40	25.00
LTE Band 7	N/A	N/A	12.20	21.50	11.80	22.00	N/A	N/A	11.70	24.00	10.50	25.00
LTE Band 7 ULCA	N/A	N/A	12.20	21.50	11.80	22.00	N/A	N/A	11.70	24.00	10.50	25.00
LTE Band 41 (PC3)	N/A	N/A	11.3	23.0	12.1	23.0	N/A	N/A	11.9	23.0	10.2	23.0
LTE Band 41 (PC3) ULCA	N/A	N/A	11.3	23.0	12.1	23.0	N/A	N/A	11.9	23.0	10.2	23.0
LTE Band 41 (PC2)	N/A	N/A	11.3	24.4	12.1	23.9	N/A	N/A	11.9	22.4	10.2	23.4
LTE Band 41 (PC2) ULCA	N/A	N/A	11.3	24.4	12.1	23.9	N/A	N/A	11.9	22.4	10.2	23.4
LTE Band 48	9.5	20.2	N/A	N/A	9.3	16.5	9.0	17.6	N/A	N/A	10.3	18.1
LTE Band 48 ULCA	9.5	20.2	N/A	N/A	9.3	16.5	9.0	17.6	N/A	N/A	10.3	18.1
NR Band n71	N/A	N/A	N/A	N/A	20.50	24.00	N/A	N/A	N/A	N/A	20.30	25.00
NR Band n12	N/A	N/A	N/A	N/A	18.90	24.00	N/A	N/A	N/A	N/A	18.80	25.00
NR Band n14	N/A	N/A	N/A	N/A	19.40	24.00	N/A	N/A	N/A	N/A	20.60	25.00
NR Band n26	N/A	N/A	N/A	N/A	18.80	24.00	N/A	N/A	N/A	N/A	19.10	25.00
NR Band n5	N/A	N/A	N/A	N/A	18.90	24.00	N/A	N/A	N/A	N/A	19.00	25.00
NR Band n70	N/A	N/A	11.50	25.00	14.50	24.50	N/A	N/A	11.90	24.50	14.30	25.00
NR Band n66	N/A	N/A	11.70	25.00	14.30	24.80	N/A	N/A	11.90	24.80	14.30	25.00
NR Band n2	N/A	N/A	11.30	22.00	14.90	23.00	N/A	N/A	11.90	24.00	13.40	25.00
NR Band n25	N/A	N/A	11.30	22.00	14.90	23.00	N/A	N/A	11.90	24.00	13.40	25.00
NR Band n30	N/A	N/A	11.50	21.50	12.30	20.80	N/A	N/A	11.90	22.10	13.40	25.00
NR Band n7	N/A	N/A	12.20	21.50	11.80	22.00	N/A	N/A	11.70	24.00	10.50	25.00
NR Band n41 (PC3)	N/A	N/A	11.70	25.00	11.80	25.00	N/A	N/A	11.40	25.00	9.90	25.00
NR Band n41 (PC2)	N/A	N/A	11.70	28.00	11.80	27.50	N/A	N/A	11.40	26.00	9.90	27.00
NR Band n77 (PC3)	8.9	22.3	N/A	N/A	9.0	22.3	8.0	24.7	N/A	N/A	9.8	24.7
NR Band n77 (PC2)	8.9	22.5	N/A	N/A	9.0	22.5	8.0	26.5	N/A	N/A	9.8	26.0
NR Band n48	9.50	22.20	N/A	N/A	9.30	18.50	9.00	19.60	N/A	N/A	10.30	20.10

*Note all P_{limit} EFS and maximum tune up output power P_{max} levels entered in above Table correspond to average power levels after accounting for duty cycle in the case of TDD modulation schemes (for e.g., LTE TDD).

The maximum time-averaged output power (dBm) for any Sub6 WWAN technology, band, and DSI = minimum of " P_{limit} EFS" and "Maximum tune up output power P_{max} " + smart tx uncertainty. SAR values in this report were scaled to this maximum time-averaged output power to determine compliance per KDB Publication 447498 D04v01.

The purpose of this report (Part 1 test) is to demonstrate that the EUT meets FCC SAR limits when transmitting in static transmission scenario at maximum allowable time-averaged power levels.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 5 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

1.3 Power Reduction for SAR

This device additionally utilizes a power reduction mechanism for Bluetooth/802.15.4/NB UNII and WLAN operations. When Bluetooth/802.15.4/NB UNII/WLAN is operating simultaneously with certain combinations of 3G/4G/5G and 5/6 GHz WLAN antennas, the output power is permanently reduced. SAR evaluations were additionally performed at the maximum allowed output power for these scenarios to evaluate simultaneous transmission compliance.

Additionally, this device uses an independent mechanism that limits WIFI powers to a time-averaged output power. For the purposes of this test report, all SAR measurements were performed with the algorithm disabled at the maximum time-averaged output power level. Verification data for this time-averaged SAR mechanism can be found in the WLAN Time-Averaged SAR Verification Appendix.

1.4 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D04v01.

1.4.1 WWAN Output Power

Table 1-1
UMTS B5 (850 MHz)

Mode/Band			Modulated Average Output Power (in dBm)	
			Ant 2	Ant 4
UMTS Band 5 (850 MHz)	Max allowed power	3GPP WCDMA	19.90	20.00
	Nominal	Rel 99	18.90	19.00
	Max allowed power	3GPP HSDPA	19.90	20.00
	Nominal	Rel 5	18.90	19.00
	Max allowed power	3GPP HSUPA	19.90	20.00
	Nominal	Rel 6	18.90	19.00
	Max allowed power	3GPP DC-	19.90	20.00
	Nominal	HSDPA Rel 8	18.90	19.00

Table 1-2
UMTS B4 (1750 MHz)

Mode/Band			Modulated Average Output Power (in dBm)			
			Ant 1b	Ant 2	Ant 3b	Ant 4
UMTS Band 4 (1750 MHz)	Max allowed power	3GPP WCDMA	12.50	15.50	12.90	15.30
	Nominal	Rel 99	11.50	14.50	11.90	14.30
	Max allowed power	3GPP HSDPA	12.50	15.50	12.90	15.30
	Nominal	Rel 5	11.50	14.50	11.90	14.30
	Max allowed power	3GPP HSUPA	12.50	15.50	12.90	15.30
	Nominal	Rel 6	11.50	14.50	11.90	14.30
	Max allowed power	3GPP DC-	12.50	15.50	12.90	15.30
	Nominal	HSDPA Rel 8	11.50	14.50	11.90	14.30

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 6 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 1-3
UMTS B2 (1900 MHz)

Mode/Band			Modulated Average Output Power (in dBm)			
			Ant 1b	Ant 2	Ant 3b	Ant 4
UMTS Band 2 (1900 MHz)	Max allowed power	3GPP WCDMA	12.30	15.60	12.90	14.40
	Nominal	Rel 99	11.30	14.60	11.90	13.40
	Max allowed power	3GPP HSDPA	12.30	15.60	12.90	14.40
	Nominal	Rel 5	11.30	14.60	11.90	13.40
	Max allowed power	3GPP HSUPA	12.30	15.60	12.90	14.40
	Nominal	Rel 6	11.30	14.60	11.90	13.40
	Max allowed power	3GPP DC-	12.30	15.60	12.90	14.40
	Nominal	HSDPA Rel 8	11.30	14.60	11.90	13.40

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 7 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

**Table 1-4
LTE Bands**

Mode / Band			Modulated Average Output Power (in dBm)					
			Ant 1a	Ant 1b	Ant 2	Ant 3a	Ant 3b	Ant 4
LTE FDD Band 71	Max allowed power				21.30			21.00
	Nominal				20.50			20.30
LTE FDD Band 12	Max allowed power				19.90			19.50
	Nominal				18.90			18.80
LTE FDD Band 17	Max allowed power				19.90			19.50
	Nominal				18.90			18.80
LTE FDD Band 13	Max allowed power				20.40			21.30
	Nominal				19.40			20.60
LTE FDD Band 14	Max allowed power				20.40			21.80
	Nominal				19.40			21.10
LTE FDD Band 26	Max allowed power				19.70			20.00
	Nominal				18.80			19.10
LTE FDD Band 5	Max allowed power				19.90			20.00
	Nominal				18.90			19.00
LTE FDD Band 5 Intra-band ULCA	Max allowed power				19.90			20.00
	Nominal				18.90			19.00
LTE FDD Band 4	Max allowed power			13.20	15.30		12.90	15.30
	Nominal			12.20	14.30		11.90	14.30
LTE FDD Band 66	Max allowed power			13.20	15.30		12.90	15.30
	Nominal			12.20	14.30		11.90	14.30
LTE FDD Band 2	Max allowed power			12.30	15.60		12.90	14.40
	Nominal			11.30	14.90		11.90	13.40
LTE FDD Band 25	Max allowed power			12.30	15.60		12.90	14.40
	Nominal			11.30	14.90		11.90	13.40
LTE FDD Band 30	Max allowed power			12.50	13.30		12.90	14.40
	Nominal			11.50	12.30		11.90	13.40
LTE FDD Band 7	Max allowed power			13.20	12.80		12.70	11.50
	Nominal			12.20	11.80		11.70	10.50
LTE FDD Band 7 Intra-band ULCA	Max allowed power			13.20	12.80		12.70	11.50
	Nominal			12.20	11.80		11.70	10.50
LTE TDD Band 41 (PC3)	Max allowed power			14.30	15.10		14.90	13.20
	Nominal			13.30	14.10		13.90	12.20
LTE TDD Band 41 (PC3) Intra-band ULCA	Max allowed power			14.30	15.10		14.90	13.20
	Nominal			13.30	14.10		13.90	12.20
LTE TDD Band 41 (PC2)	Max allowed power			15.90	16.70		16.50	14.80
	Nominal			14.90	15.70		15.50	13.80
LTE TDD Band 41 (PC2) Intra-band ULCA	Max allowed power			15.90	16.70		16.50	14.80
	Nominal			14.90	15.70		15.50	13.80
LTE TDD Band 48	Max allowed power		12.50		12.30	12.00		13.30
	Nominal		11.50		11.30	11.00		12.30
LTE TDD Band 48 Intra-band ULCA	Max allowed power		12.50		12.30	12.00		13.30
	Nominal		11.50		11.30	11.00		12.30

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 8 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

**Table 1-5
NR Bands**

Mode / Band		Modulated Average Output Power (in dBm)					
		Ant 1a	Ant 1b	Ant 2	Ant 3a	Ant 3b	Ant 4
NR FDD Band n71	Max allowed power			21.30			21.00
	Nominal			20.50			20.30
NR FDD Band n12	Max allowed power			19.90			19.50
	Nominal			18.90			18.80
NR FDD Band n14	Max allowed power			20.40			21.30
	Nominal			19.40			20.60
NR FDD Band n26	Max allowed power			19.70			20.00
	Nominal			18.80			19.10
NR FDD Band n5	Max allowed power			19.90			20.00
	Nominal			18.90			19.00
NR FDD Band n70	Max allowed power		12.50	15.50		12.90	15.30
	Nominal		11.50	14.50		11.90	14.30
NR FDD Band n66	Max allowed power		12.70	15.30		12.90	15.30
	Nominal		11.70	14.30		11.90	14.30
NR FDD Band n2	Max allowed power		12.30	15.60		12.90	14.40
	Nominal		11.30	14.90		11.90	13.40
NR FDD Band n25	Max allowed power		12.30	15.60		12.90	14.40
	Nominal		11.30	14.90		11.90	13.40
NR FDD Band n30	Max allowed power		12.50	13.30		12.90	14.40
	Nominal		11.50	12.30		11.90	13.40
NR FDD Band n7	Max allowed power		13.20	12.80		12.70	11.50
	Nominal		12.20	11.80		11.70	10.50
NR TDD Band n41 (PC3)	Max allowed power		12.70	12.80		12.40	10.90
	Nominal		11.70	11.80		11.40	9.90
NR TDD Band n41 (PC2)	Max allowed power		12.70	12.80		12.40	10.90
	Nominal		11.70	11.80		11.40	9.90
NR TDD Band n77 (PC3)	Max allowed power	9.90		10.00	9.00		10.80
	Nominal	8.90		9.00	8.00		9.80
NR TDD Band n77 (PC2)	Max allowed power	9.90		10.00	9.00		10.80
	Nominal	8.90		9.00	8.00		9.80
NR TDD Band n48	Max allowed power	10.50		10.30	10.00		11.30
	Nominal	9.50		9.30	9.00		10.30

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 9 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Maximum WLAN Time-Averaged Output Power

Note: Targets for 802.11ax RU operations can be found in 802.11ax RU SAR Exclusion Appendix.

[illegible]

Note: In MIMO operations, each antenna transmits at maximum allowed powers as indicated above.

Mode	Channel	IEEE 802.11 (Maximum in dBm) - Antenna 3a															
		SSID	SSID	SSID	SSID	SSID	SSID	SSID	SSID	SSID	SSID	SSID	SSID	SSID	SSID	SSID	SSID
		b	b	b	b	b	b	b	b	b	b	b	b	b	b	b	b
		g (Nominal)	g (Nominal)	g (Nominal)	g (Nominal)	g (Nominal)	g (Nominal)	g (Nominal)	g (Nominal)	g (Nominal)	g (Nominal)	g (Nominal)	g (Nominal)	g (Nominal)	g (Nominal)	g (Nominal)	g (Nominal)
2.4 GHz WiFi 20 MHz Bandwidth	1	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50
	2	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50
	3	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50
	4	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50
	5	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50
	6	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50
	7	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50
	8	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50
	9	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50
	10	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50
	11	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50
	12	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50
	13	11.00	9.50	10.00	NS	8.50	NS	8.50	NS	8.50	NS	8.50	NS	8.00	NS	NS	NS

Note: In MIMO operations, each antenna transmits at maximum allowed powers as indicated above.

Mode	Channel	IEEE 802.11 (Maximum in dBm) - Antenna 2b															
		SISO α (MaxPower)	SISO α (MaxPower)	SISO α (w/ MaxPower)	SISO α (w/ MaxPower)	SISO α w/ 10 (MaxPower)	SISO α w/ 10 (MaxPower)	MIMO CSD α (w/ 10 (MaxPower))	MIMO CSD α (w/ 10 (MaxPower))	MIMO CSD α w/ 10 (MaxPower)	MIMO DSM α (w/ 10 (MaxPower))	MIMO DSM α (w/ 10 (MaxPower))	MIMO DSM α w/ 10 (MaxPower)	MIMO DSM α w/ 10 (MaxPower)			
5 GHz WiFi 20MHz Bandwidth	35	-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
	40	-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
	45	-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
	49	-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
	52	-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
	56	-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
	60	-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
	64	-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
	68	-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
	72	-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
	76	-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
	80	-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
	84	-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
	88	-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
	92	-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
	96	-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
	100	-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
5 GHz WiFi 40MHz Bandwidth	104	-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
	108	-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
	112	-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
	116	-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
	120	-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
	124	-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
	128	-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
	132	-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
	136	-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
	140	-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
	144	-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
	148	-9.75	8.25	9.75	8.25	8.25	9.75	8.25	9.75	8.25	9.75	8.25	9.75	8.25			
	152	-9.75	8.25	9.75	8.25	8.25	9.75	8.25	9.75	8.25	9.75	8.25	9.75	8.25			
	156	-9.75	8.25	9.75	8.25	8.25	9.75	8.25	9.75	8.25	9.75	8.25	9.75	8.25			
	160	-9.75	8.25	9.75	8.25	8.25	9.75	8.25	9.75	8.25	9.75	8.25	9.75	8.25			
	164	-9.75	8.25	9.75	8.25	8.25	9.75	8.25	9.75	8.25	9.75	8.25	9.75	8.25			
	5 GHz WiFi 80MHz Bandwidth	168	-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50		
172		-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
176		-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
180		-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
184		-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
188		-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
192		-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
196		-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
200		-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
204		-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
208		-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
212		-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
216		-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
220		-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
224		-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
228		-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
5 GHz WiFi 160MHz Bandwidth		232	-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50		
	236	-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
	240	-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
	244	-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
	248	-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
	252	-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
	256	-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
	260	-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
	264	-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
	268	-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
	272	-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
	276	-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
	280	-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
	284	-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
	288	-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
	292	-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			
	296	-11.00	9.50	11.00	9.50	9.50	11.00	9.50	11.00	9.50	11.00	9.50	11.00	9.50			

Note: In MIMO operations, each antenna transmits at maximum allowed powers as indicated above.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 10 of 255

Note: In MIMO operations, each antenna transmits at maximum allowed powers as indicated above.

Note: In MIMO operations, each antenna transmits at maximum allowed powers as indicated above.

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Mode	Channel	IEEE 802.11 (Maximum in dBm) - Antenna 1b							
		SISO	SISO	SISO	SISO	MIMO CDD	MIMO CDD	MIMO SDM	MIMO SDM
		a (Maximum)	a (Nominal)	ax SU (Maximum)	ax SU (Nominal)	ax SU (Maximum)	ax SU (Nominal)	ax SU (Maximum)	ax SU (Nominal)
6 GHz WIFI (20MHz BW) SP	2	NS	NS	NS	NS	NS	NS	NS	NS
	1	10.00	8.50	10.00	8.50	10.00	8.50	10.00	8.50
	5	10.00	8.50	10.00	8.50	10.00	8.50	10.00	8.50
	9-29	10.00	8.50	10.00	8.50	10.00	8.50	10.00	8.50
	33-61	10.00	8.50	10.00	8.50	10.00	8.50	10.00	8.50
	65-85	10.75	9.25	10.75	9.25	10.75	9.25	10.75	9.25
	89	10.75	9.25	10.75	9.25	10.75	9.25	10.75	9.25
	93	10.75	9.25	10.75	9.25	10.75	9.25	10.75	9.25
	97-113	NS	NS	NS	NS	NS	NS	NS	NS
	117-181	11.25	9.75	11.25	9.75	11.25	9.75	11.25	9.75
	185	NS	NS	NS	NS	NS	NS	NS	NS
	189-225	NS	NS	NS	NS	NS	NS	NS	NS
	229	NS	NS	NS	NS	NS	NS	NS	NS
	233	NS	NS	NS	NS	NS	NS	NS	NS
6 GHz WIFI (40MHz BW) SP	3			10.00	8.50	10.00	8.50	10.00	8.50
	11			10.00	8.50	10.00	8.50	10.00	8.50
	19-27			10.00	8.50	10.00	8.50	10.00	8.50
	35-59			10.00	8.50	10.00	8.50	10.00	8.50
	67-75			10.75	9.25	10.75	9.25	10.75	9.25
	83			10.75	9.25	10.75	9.25	10.75	9.25
	91			10.75	9.25	10.75	9.25	10.75	9.25
	99-107			NS	NS	NS	NS	NS	NS
	115			NS	NS	NS	NS	NS	NS
	123-179			11.25	9.75	11.25	9.75	11.25	9.75
	187			NS	NS	NS	NS	NS	NS
	195-219			NS	NS	NS	NS	NS	NS
	227			NS	NS	NS	NS	NS	NS
6 GHz WIFI (80MHz BW) SP	7			10.00	8.50	10.00	8.50	10.00	8.50
	23			10.00	8.50	10.00	8.50	10.00	8.50
	39-55			10.00	8.50	10.00	8.50	10.00	8.50
	71			10.75	9.25	10.75	9.25	10.75	9.25
	87			10.75	9.25	10.75	9.25	10.75	9.25
	103			NS	NS	NS	NS	NS	NS
	119			NS	NS	NS	NS	NS	NS
	135-167			11.25	9.75	11.25	9.75	11.25	9.75
	183			NS	NS	NS	NS	NS	NS
	199			NS	NS	NS	NS	NS	NS
	215			NS	NS	NS	NS	NS	NS
6 GHz WIFI (160MHz BW) SP	15			10.00	8.50	10.00	8.50	10.00	8.50
	47			10.00	8.50	10.00	8.50	10.00	8.50
	79			10.75	9.25	10.75	9.25	10.75	9.25
	111			NS	NS	NS	NS	NS	NS
	143			11.25	9.75	11.25	9.75	11.25	9.75
	175			NS	NS	NS	NS	NS	NS
	207			NS	NS	NS	NS	NS	NS

Note: In MIMO operations, each antenna transmits at maximum allowed powers as indicated above.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 12 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Mode	IEEE 802.11 (Maximum in dBm) - Antenna 1b								
	Channel	SISO	SISO	SISO	SISO	MIMO CDD	MIMO CDD	MIMO SDM	MIMO SDM
		a (Maximum)	a (Nominal)	ax SU (Maximum)	ax SU (Nominal)	ax SU (Maximum)	ax SU (Nominal)	ax SU (Maximum)	ax SU (Nominal)
6 GHz WIFI (20MHz BW) LP	2	NS	NS	NS	NS	NS	NS	NS	NS
	1	3.00	1.50	3.50	2.00	-1.00	-2.50	2.00	0.50
	5	3.00	1.50	3.50	2.00	-1.00	-2.50	2.00	0.50
	9-29	3.00	1.50	3.50	2.00	-1.00	-2.50	2.00	0.50
	33-61	3.50	2.00	4.00	2.50	-0.25	-1.75	2.50	1.00
	65-85	3.25	1.75	3.75	2.25	-0.50	-2.00	2.25	0.75
	89	3.25	1.75	3.75	2.25	-0.50	-2.00	2.25	0.75
	93	3.25	1.75	3.75	2.25	-0.50	-2.00	2.25	0.75
	97-113	2.75	1.25	3.25	1.75	-0.75	-2.25	2.00	0.50
	117-181	2.25	0.75	2.75	1.25	-1.25	-2.75	1.50	0.00
	185	1.75	0.25	2.25	0.75	-1.50	-3.00	1.25	-0.25
	189-225	1.75	0.25	2.25	0.75	-1.50	-3.00	1.25	-0.25
	229	1.75	0.25	2.25	0.75	-1.50	-3.00	1.25	-0.25
	233	1.75	0.25	2.25	0.75	-1.50	-3.00	1.25	-0.25
6 GHz WIFI (40MHz BW) LP	3			6.50	5.00	2.00	0.50	5.00	3.50
	11			6.50	5.00	2.00	0.50	5.00	3.50
	19-27			6.50	5.00	2.00	0.50	5.00	3.50
	35-59			7.00	5.50	2.75	1.25	5.50	4.00
	67-75			6.75	5.25	2.50	1.00	5.25	3.75
	83			6.75	5.25	2.50	1.00	5.25	3.75
	91			6.75	5.25	2.50	1.00	5.25	3.75
	99-107			6.25	4.75	2.25	0.75	5.00	3.50
	115			5.75	4.25	1.75	0.25	4.50	3.00
	123-179			5.75	4.25	1.75	0.25	4.50	3.00
	187			5.25	3.75	1.50	0.00	4.25	2.75
	195-219			5.25	3.75	1.50	0.00	4.25	2.75
	227			5.25	3.75	1.50	0.00	4.25	2.75
	7			9.00	7.50	4.50	3.00	7.50	6.00
6 GHz WIFI (80MHz BW) LP	23			9.00	7.50	4.50	3.00	7.50	6.00
	39-55			9.50	8.00	5.25	3.75	8.00	6.50
	71			9.25	7.75	5.00	3.50	7.75	6.25
	87			9.25	7.75	5.00	3.50	7.75	6.25
	103			8.75	7.25	4.75	3.25	7.50	6.00
	119			8.25	6.75	4.25	2.75	7.00	5.50
	135-167			8.25	6.75	4.25	2.75	7.00	5.50
	183			7.75	6.25	4.00	2.50	6.75	5.25
	199			7.75	6.25	4.00	2.50	6.75	5.25
	215			7.75	6.25	4.00	2.50	6.75	5.25
6 GHz WIFI (160MHz BW) LP	15			10.00	8.50	7.00	5.50	10.00	8.50
	47			10.00	8.50	7.75	6.25	10.00	8.50
	79			10.75	9.25	7.50	6.00	10.25	8.75
	111			10.75	9.25	6.75	5.25	9.50	8.00
	143			10.75	9.25	6.75	5.25	9.50	8.00
	175			10.25	8.75	6.50	5.00	9.25	7.75
	207			10.25	8.75	6.50	5.00	9.25	7.75

Note: In MIMO operations, each antenna transmits at maximum allowed powers as indicated above.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 13 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Mode	IEEE 802.11 (Maximum in dBm) - Antenna 1b								
	Channel	SISO	SISO	SISO	SISO	MIMO CDD	MIMO CDD	MIMO SDM	MIMO SDM
		a (Maximum)	a (Nominal)	ax SU (Maximum)	ax SU (Nominal)	ax SU (Maximum)	ax SU (Nominal)	ax SU (Maximum)	ax SU (Nominal)
6 GHz WIFI (20MHz BW) VLP	2	NS	NS	NS	NS	NS	NS	NS	NS
	1	NS	NS	NS	NS	NS	NS	NS	NS
	5	NS	NS	NS	NS	NS	NS	NS	NS
	9-29	NS	NS	NS	NS	NS	NS	NS	NS
	33-61	-0.50	-2.00	0.00	-1.50	-4.25	-5.75	-1.50	-3.00
	65-85	-0.75	-2.25	-0.25	-1.75	NS	NS	-1.75	-3.25
	89	-0.75	-2.25	-0.25	-1.75	NS	NS	-1.75	-3.25
	93	-0.75	-2.25	-0.25	-1.75	NS	NS	-1.75	-3.25
	97-113	NS	NS	NS	NS	NS	NS	NS	NS
	117-181	-1.75	-3.25	-1.25	-2.75	NS	NS	-2.50	-4.00
	185	NS	NS	NS	NS	NS	NS	NS	NS
	189-225	NS	NS	NS	NS	NS	NS	NS	NS
	229	NS	NS	NS	NS	NS	NS	NS	NS
	233	NS	NS	NS	NS	NS	NS	NS	NS
6 GHz WIFI (40MHz BW) VLP	3			NS	NS	NS	NS	NS	NS
	11			NS	NS	NS	NS	NS	NS
	19-27			NS	NS	NS	NS	NS	NS
	35-59			3.00	1.50	-1.25	-2.75	1.50	0.00
	67-75			2.75	1.25	-1.50	-3.00	1.25	-0.25
	83			2.75	1.25	-1.50	-3.00	1.25	-0.25
	91			2.75	1.25	-1.50	-3.00	1.25	-0.25
	99-107			NS	NS	NS	NS	NS	NS
	115			NS	NS	NS	NS	NS	NS
	123-179			1.75	0.25	-2.25	-3.75	0.50	-1.00
	187			NS	NS	NS	NS	NS	NS
	195-219			NS	NS	NS	NS	NS	NS
	227			NS	NS	NS	NS	NS	NS
	7			NS	NS	NS	NS	NS	NS
6 GHz WIFI (80MHz BW) VLP	23			NS	NS	NS	NS	NS	NS
	39-55			5.50	4.00	1.25	-0.25	4.00	2.50
	71			5.25	3.75	1.00	-0.50	3.75	2.25
	87			5.25	3.75	1.00	-0.50	3.75	2.25
	103			NS	NS	NS	NS	NS	NS
	119			NS	NS	NS	NS	NS	NS
	135-167			4.25	2.75	0.25	-1.25	3.00	1.50
	183			NS	NS	NS	NS	NS	NS
	199			NS	NS	NS	NS	NS	NS
	215			NS	NS	NS	NS	NS	NS
	15			NS	NS	NS	NS	NS	NS
6 GHz WIFI (160MHz BW) VLP	47			8.00	6.50	3.75	2.25	6.50	5.00
	79			7.75	6.25	3.50	2.00	6.25	4.75
	111			NS	NS	NS	NS	NS	NS
	143			6.75	5.25	2.75	1.25	5.50	4.00
	175			NS	NS	NS	NS	NS	NS
	207			NS	NS	NS	NS	NS	NS

Note: In MIMO operations, each antenna transmits at maximum allowed powers as indicated above.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 14 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Mode	Channel	IEEE 802.11 (Maximum in dBm) - Antenna 3b							
		SISO	SISO	SISO	SISO	MIMO CDD	MIMO CDD	MIMO SDM	MIMO SDM
		a (Maximum)	a (Nominal)	ax SU (Maximum)	ax SU (Nominal)	ax SU (Maximum)	ax SU (Nominal)	ax SU (Maximum)	ax SU (Nominal)
6 GHz WIFI (20MHz BW) SP	2	NS	NS	NS	NS	NS	NS	NS	NS
	1	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00
	5	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00
	9-29	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00
	33-61	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00
	65-85	14.00	12.50	14.00	12.50	14.00	12.50	14.00	12.50
	89	14.00	12.50	14.00	12.50	14.00	12.50	14.00	12.50
	93	14.00	12.50	14.00	12.50	14.00	12.50	14.00	12.50
	97-113	NS	NS	NS	NS	NS	NS	NS	NS
	117-181	13.75	12.25	13.75	12.25	13.75	12.25	13.75	12.25
	185	NS	NS	NS	NS	NS	NS	NS	NS
	189-225	NS	NS	NS	NS	NS	NS	NS	NS
	229	NS	NS	NS	NS	NS	NS	NS	NS
	233	NS	NS	NS	NS	NS	NS	NS	NS
6 GHz WIFI (40MHz BW) SP	3			11.50	10.00	11.50	10.00	11.50	10.00
	11			11.50	10.00	11.50	10.00	11.50	10.00
	19-27			11.50	10.00	11.50	10.00	11.50	10.00
	35-59			11.50	10.00	11.50	10.00	11.50	10.00
	67-75			14.00	12.50	14.00	12.50	14.00	12.50
	83			14.00	12.50	14.00	12.50	14.00	12.50
	91			14.00	12.50	14.00	12.50	14.00	12.50
	99-107			NS	NS	NS	NS	NS	NS
	115			NS	NS	NS	NS	NS	NS
	123-179			13.75	12.25	13.75	12.25	13.75	12.25
	187			NS	NS	NS	NS	NS	NS
	195-219			NS	NS	NS	NS	NS	NS
	227			NS	NS	NS	NS	NS	NS
	7			11.50	10.00	11.50	10.00	11.50	10.00
6 GHz WIFI (80MHz BW) SP	23			11.50	10.00	11.50	10.00	11.50	10.00
	39-55			11.50	10.00	11.50	10.00	11.50	10.00
	71			14.00	12.50	14.00	12.50	14.00	12.50
	87			14.00	12.50	14.00	12.50	14.00	12.50
	103			NS	NS	NS	NS	NS	NS
	119			NS	NS	NS	NS	NS	NS
	135-167			14.25	12.75	14.25	12.75	14.25	12.75
	183			NS	NS	NS	NS	NS	NS
	199			NS	NS	NS	NS	NS	NS
	215			NS	NS	NS	NS	NS	NS
	15			11.50	10.00	11.50	10.00	11.50	10.00
	47			11.50	10.00	11.50	10.00	11.50	10.00
	79			14.00	12.50	14.00	12.50	14.00	12.50
	111			NS	NS	NS	NS	NS	NS
6 GHz WIFI (160MHz BW) SP	143			14.75	13.25	14.75	13.25	14.75	13.25
	175			NS	NS	NS	NS	NS	NS
	207			NS	NS	NS	NS	NS	NS
				NS	NS	NS	NS	NS	NS

Note: In MIMO operations, each antenna transmits at maximum allowed powers as indicated above.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 15 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Mode	Channel	IEEE 802.11 (Maximum in dBm) - Antenna 3b							
		SISO	SISO	SISO	SISO	MIMO CDD	MIMO CDD	MIMO SDM	MIMO SDM
		a (Maximum)	a (Nominal)	ax SU (Maximum)	ax SU (Nominal)	ax SU (Maximum)	ax SU (Nominal)	ax SU (Maximum)	ax SU (Nominal)
6 GHz WIFI (20MHz BW) LP	2	NS	NS	NS	NS	NS	NS	NS	NS
	1	4.75	3.25	5.25	3.75	0.75	-0.75	3.75	2.25
	5	4.75	3.25	5.25	3.75	0.75	-0.75	3.75	2.25
	9-29	4.75	3.25	5.25	3.75	0.75	-0.75	3.75	2.25
	33-61	5.25	3.75	5.75	4.25	1.50	0.00	4.25	2.75
	65-85	5.00	3.50	5.50	4.00	1.25	-0.25	4.00	2.50
	89	5.00	3.50	5.50	4.00	1.25	-0.25	4.00	2.50
	93	5.00	3.50	5.50	4.00	1.25	-0.25	4.00	2.50
	97-113	4.50	3.00	5.00	3.50	1.00	-0.50	3.75	2.25
	117-181	4.00	2.50	4.50	3.00	0.50	-1.00	3.25	1.75
	185	3.50	2.00	4.00	2.50	0.25	-1.25	3.00	1.50
	189-225	3.50	2.00	4.00	2.50	0.25	-1.25	3.00	1.50
	229	3.50	2.00	4.00	2.50	0.25	-1.25	3.00	1.50
	233	3.50	2.00	4.00	2.50	0.25	-1.25	3.00	1.50
6 GHz WIFI (40MHz BW) LP	3			8.25	6.75	3.75	2.25	6.75	5.25
	11			8.25	6.75	3.75	2.25	6.75	5.25
	19-27			8.25	6.75	3.75	2.25	6.75	5.25
	35-59			8.75	7.25	4.50	3.00	7.25	5.75
	67-75			8.50	7.00	4.25	2.75	7.00	5.50
	83			8.50	7.00	4.25	2.75	7.00	5.50
	91			8.50	7.00	4.25	2.75	7.00	5.50
	99-107			8.00	6.50	4.00	2.50	6.75	5.25
	115			7.50	6.00	3.50	2.00	6.25	4.75
	123-179			7.50	6.00	3.50	2.00	6.25	4.75
	187			7.00	5.50	3.25	1.75	6.00	4.50
	195-219			7.00	5.50	3.25	1.75	6.00	4.50
	227			7.00	5.50	3.25	1.75	6.00	4.50
6 GHz WIFI (80MHz BW) LP	7			10.75	9.25	6.25	4.75	9.25	7.75
	23			10.75	9.25	6.25	4.75	9.25	7.75
	39-55			11.25	9.75	7.00	5.50	9.75	8.25
	71			11.00	9.50	6.75	5.25	9.50	8.00
	87			11.00	9.50	6.75	5.25	9.50	8.00
	103			10.50	9.00	6.50	5.00	9.25	7.75
	119			10.00	8.50	6.00	4.50	8.75	7.25
	135-167			10.00	8.50	6.00	4.50	8.75	7.25
	183			9.50	8.00	5.75	4.25	8.50	7.00
	199			9.50	8.00	5.75	4.25	8.50	7.00
	215			9.50	8.00	5.75	4.25	8.50	7.00
6 GHz WIFI (160MHz BW) LP	15			11.50	10.00	8.75	7.25	11.50	10.00
	47			11.50	10.00	9.50	8.00	11.50	10.00
	79			13.50	12.00	9.25	7.75	12.00	10.50
	111			12.50	11.00	8.50	7.00	11.25	9.75
	143			12.50	11.00	8.50	7.00	11.25	9.75
	175			12.00	10.50	8.25	6.75	11.00	9.50
	207			12.00	10.50	8.25	6.75	11.00	9.50

Note: In MIMO operations, each antenna transmits at maximum allowed powers as indicated above.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 16 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Mode	Channel	IEEE 802.11 (Maximum in dBm) - Antenna 3b							
		SISO	SISO	SISO	SISO	MIMO CDD	MIMO CDD	MIMO SDM	MIMO SDM
		a (Maximum)	a (Nominal)	ax SU (Maximum)	ax SU (Nominal)	ax SU (Maximum)	ax SU (Nominal)	ax SU (Maximum)	ax SU (Nominal)
6 GHz WIFI (20MHz BW) VLP	2	NS	NS	NS	NS	NS	NS	NS	NS
	1	NS	NS	NS	NS	NS	NS	NS	NS
	5	NS	NS	NS	NS	NS	NS	NS	NS
	9-29	NS	NS	NS	NS	NS	NS	NS	NS
	33-61	1.25	-0.25	1.75	0.25	-2.50	-4.00	0.25	-1.25
	65-85	1.00	-0.50	1.50	0.00	NS	NS	0.00	-1.50
	89	1.00	-0.50	1.50	0.00	NS	NS	0.00	-1.50
	93	1.00	-0.50	1.50	0.00	NS	NS	0.00	-1.50
	97-113	NS	NS	NS	NS	NS	NS	NS	NS
	117-181	0.00	-1.50	0.50	-1.00	NS	NS	-0.75	-2.25
	185	NS	NS	NS	NS	NS	NS	NS	NS
	189-225	NS	NS	NS	NS	NS	NS	NS	NS
	229	NS	NS	NS	NS	NS	NS	NS	NS
	233	NS	NS	NS	NS	NS	NS	NS	NS
6 GHz WIFI (40MHz BW) VLP	3			NS	NS	NS	NS	NS	NS
	11			NS	NS	NS	NS	NS	NS
	19-27			NS	NS	NS	NS	NS	NS
	35-59			4.75	3.25	0.50	-1.00	3.25	1.75
	67-75			4.50	3.00	0.25	-1.25	3.00	1.50
	83			4.50	3.00	0.25	-1.25	3.00	1.50
	91			4.50	3.00	0.25	-1.25	3.00	1.50
	99-107			NS	NS	NS	NS	NS	NS
	115			NS	NS	NS	NS	NS	NS
	123-179			3.50	2.00	-0.50	-2.00	2.25	0.75
	187			NS	NS	NS	NS	NS	NS
	195-219			NS	NS	NS	NS	NS	NS
	227			NS	NS	NS	NS	NS	NS
	23			NS	NS	NS	NS	NS	NS
6 GHz WIFI (80MHz BW) VLP	7			NS	NS	NS	NS	NS	NS
	23			NS	NS	NS	NS	NS	NS
	39-55			7.25	5.75	3.00	1.50	5.75	4.25
	71			7.00	5.50	2.75	1.25	5.50	4.00
	87			7.00	5.50	2.75	1.25	5.50	4.00
	103			NS	NS	NS	NS	NS	NS
	119			NS	NS	NS	NS	NS	NS
	135-167			6.00	4.50	2.00	0.50	4.75	3.25
	183			NS	NS	NS	NS	NS	NS
	199			NS	NS	NS	NS	NS	NS
	215			NS	NS	NS	NS	NS	NS
6 GHz WIFI (160MHz BW) VLP	15			NS	NS	NS	NS	NS	NS
	47			9.75	8.25	5.50	4.00	8.25	6.75
	79			9.50	8.00	5.25	3.75	8.00	6.50
	111			NS	NS	NS	NS	NS	NS
	143			8.50	7.00	4.50	3.00	7.25	5.75
	175			NS	NS	NS	NS	NS	NS
	207			NS	NS	NS	NS	NS	NS

Note: In MIMO operations, each antenna transmits at maximum allowed powers as indicated above.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 17 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Mode	Channel	IEEE 802.11 (Maximum in dBm) - Antenna ST							
		SISO	SISO	SISO	SISO	MIMO CDD	MIMO CDD	MIMO SDM	MIMO SDM
		a (Maximum)	a (Nominal)	ax SU (Maximum)	ax SU (Nominal)	ax SU (Maximum)	ax SU (Nominal)	ax SU (Maximum)	ax SU (Nominal)
6 GHz WIFI (20MHz BW) SP	2	NS	NS	NS	NS	NS	NS	NS	NS
	1	12.75	11.25	12.75	11.25	12.75	11.25	12.75	11.25
	5	12.75	11.25	12.75	11.25	12.75	11.25	12.75	11.25
	9-29	12.75	11.25	12.75	11.25	12.75	11.25	12.75	11.25
	33-61	12.75	11.25	12.75	11.25	12.75	11.25	12.75	11.25
	65-85	12.50	11.00	12.50	11.00	12.50	11.00	12.50	11.00
	89	12.50	11.00	12.50	11.00	12.50	11.00	12.50	11.00
	93	12.50	11.00	12.50	11.00	12.50	11.00	12.50	11.00
	97-113	NS	NS	NS	NS	NS	NS	NS	NS
	117-181	12.25	10.75	12.25	10.75	12.25	10.75	12.25	10.75
	185	NS	NS	NS	NS	NS	NS	NS	NS
	189-225	NS	NS	NS	NS	NS	NS	NS	NS
	229	NS	NS	NS	NS	NS	NS	NS	NS
	233	NS	NS	NS	NS	NS	NS	NS	NS
6 GHz WIFI (40MHz BW) SP	3			12.75	11.25	12.75	11.25	12.75	11.25
	11			12.75	11.25	12.75	11.25	12.75	11.25
	19-27			12.75	11.25	12.75	11.25	12.75	11.25
	35-59			12.75	11.25	12.75	11.25	12.75	11.25
	67-75			12.50	11.00	12.50	11.00	12.50	11.00
	83			12.50	11.00	12.50	11.00	12.50	11.00
	91			12.50	11.00	12.50	11.00	12.50	11.00
	99-107			NS	NS	NS	NS	NS	NS
	115			NS	NS	NS	NS	NS	NS
	123-179			12.25	10.75	12.25	10.75	12.25	10.75
	187			NS	NS	NS	NS	NS	NS
	195-219			NS	NS	NS	NS	NS	NS
	227			NS	NS	NS	NS	NS	NS
6 GHz WIFI (80MHz BW) SP	7			12.75	11.25	12.75	11.25	12.75	11.25
	23			12.75	11.25	12.75	11.25	12.75	11.25
	39-55			12.75	11.25	12.75	11.25	12.75	11.25
	71			12.50	11.00	12.50	11.00	12.50	11.00
	87			12.50	11.00	12.50	11.00	12.50	11.00
	103			NS	NS	NS	NS	NS	NS
	119			NS	NS	NS	NS	NS	NS
	135-167			12.25	10.75	12.25	10.75	12.25	10.75
	183			NS	NS	NS	NS	NS	NS
	199			NS	NS	NS	NS	NS	NS
	215			NS	NS	NS	NS	NS	NS
6 GHz WIFI (160MHz BW) SP	15			12.75	11.25	12.75	11.25	12.75	11.25
	47			12.75	11.25	12.75	11.25	12.75	11.25
	79			12.50	11.00	12.50	11.00	12.50	11.00
	111			NS	NS	NS	NS	NS	NS
	143			12.25	10.75	12.25	10.75	12.25	10.75
	175			NS	NS	NS	NS	NS	NS
	207			NS	NS	NS	NS	NS	NS

Note: In MIMO operations, each antenna transmits at maximum allowed powers as indicated above.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 18 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Mode	Channel	IEEE 802.11 (Maximum in dBm) - Antenna 5T							
		SISO	SISO	SISO	SISO	MIMO CDD	MIMO CDD	MIMO SDM	MIMO SDM
		a (Maximum)	a (Nominal)	ax SU (Maximum)	ax SU (Nominal)	ax SU (Maximum)	ax SU (Nominal)	ax SU (Maximum)	ax SU (Nominal)
6 GHz WIFI (20MHz BW) LP	2	NS	NS	NS	NS	NS	NS	NS	NS
	1	4.75	3.25	5.25	3.75	0.75	-0.75	3.75	2.25
	5	4.75	3.25	5.25	3.75	0.75	-0.75	3.75	2.25
	9-29	4.75	3.25	5.25	3.75	0.75	-0.75	3.75	2.25
	33-61	5.25	3.75	5.75	4.25	1.50	0.00	4.25	2.75
	65-85	5.00	3.50	5.50	4.00	1.25	-0.25	4.00	2.50
	89	5.00	3.50	5.50	4.00	1.25	-0.25	4.00	2.50
	93	5.00	3.50	5.50	4.00	1.25	-0.25	4.00	2.50
	97-113	4.50	3.00	5.00	3.50	1.00	-0.50	3.75	2.25
	117-181	4.00	2.50	4.50	3.00	0.50	-1.00	3.25	1.75
	185	3.50	2.00	4.00	2.50	0.25	-1.25	3.00	1.50
	189-225	3.50	2.00	4.00	2.50	0.25	-1.25	3.00	1.50
	229	3.50	2.00	4.00	2.50	0.25	-1.25	3.00	1.50
	233	3.50	2.00	4.00	2.50	0.25	-1.25	3.00	1.50
6 GHz WIFI (40MHz BW) LP	3			8.25	6.75	3.75	2.25	6.75	5.25
	11			8.25	6.75	3.75	2.25	6.75	5.25
	19-27			8.25	6.75	3.75	2.25	6.75	5.25
	35-59			8.75	7.25	4.50	3.00	7.25	5.75
	67-75			8.50	7.00	4.25	2.75	7.00	5.50
	83			8.50	7.00	4.25	2.75	7.00	5.50
	91			8.50	7.00	4.25	2.75	7.00	5.50
	99-107			8.00	6.50	4.00	2.50	6.75	5.25
	115			7.50	6.00	3.50	2.00	6.25	4.75
	123-179			7.50	6.00	3.50	2.00	6.25	4.75
	187			7.00	5.50	3.25	1.75	6.00	4.50
	195-219			7.00	5.50	3.25	1.75	6.00	4.50
	227			7.00	5.50	3.25	1.75	6.00	4.50
6 GHz WIFI (80MHz BW) LP	7			10.75	9.25	6.25	4.75	9.25	7.75
	23			10.75	9.25	6.25	4.75	9.25	7.75
	39-55			11.25	9.75	7.00	5.50	9.75	8.25
	71			11.00	9.50	6.75	5.25	9.50	8.00
	87			11.00	9.50	6.75	5.25	9.50	8.00
	103			10.50	9.00	6.50	5.00	9.25	7.75
	119			10.00	8.50	6.00	4.50	8.75	7.25
	135-167			10.00	8.50	6.00	4.50	8.75	7.25
	183			9.50	8.00	5.75	4.25	8.50	7.00
	199			9.50	8.00	5.75	4.25	8.50	7.00
6 GHz WIFI (160MHz BW) LP	215			9.50	8.00	5.75	4.25	8.50	7.00
	15			12.75	11.25	8.75	7.25	11.75	10.25
	47			12.75	11.25	9.50	8.00	12.25	10.75
	79			12.50	11.00	9.25	7.75	12.00	10.50
	111			12.50	11.00	8.50	7.00	11.25	9.75
	143			12.25	10.75	8.50	7.00	11.25	9.75
	175			12.00	10.50	8.25	6.75	11.00	9.50
	207			12.00	10.50	8.25	6.75	11.00	9.50

Note: In MIMO operations, each antenna transmits at maximum allowed powers as indicated above.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 19 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Mode	Channel	IEEE 802.11 (Maximum in dBm) - Antenna ST							
		SISO	SISO	SISO	SISO	MIMO CDD	MIMO CDD	MIMO SDM	MIMO SDM
		a (Maximum)	a (Nominal)	ax SU (Maximum)	ax SU (Nominal)	ax SU (Maximum)	ax SU (Nominal)	ax SU (Maximum)	ax SU (Nominal)
6 GHz WIFI (20MHz BW) VLP	2	NS	NS	NS	NS	NS	NS	NS	NS
	1	NS	NS	NS	NS	NS	NS	NS	NS
	5	NS	NS	NS	NS	NS	NS	NS	NS
	9-29	NS	NS	NS	NS	NS	NS	NS	NS
	33-61	1.25	-0.25	1.75	0.25	-2.50	-4.00	0.25	-1.25
	65-85	1.00	-0.50	1.50	0.00	NS	NS	0.00	-1.50
	89	1.00	-0.50	1.50	0.00	NS	NS	0.00	-1.50
	93	1.00	-0.50	1.50	0.00	NS	NS	0.00	-1.50
	97-113	NS	NS	NS	NS	NS	NS	NS	NS
	117-181	0.00	-1.50	0.50	-1.00	NS	NS	-0.75	-2.25
	185	NS	NS	NS	NS	NS	NS	NS	NS
	189-225	NS	NS	NS	NS	NS	NS	NS	NS
	229	NS	NS	NS	NS	NS	NS	NS	NS
	233	NS	NS	NS	NS	NS	NS	NS	NS
6 GHz WIFI (40MHz BW) VLP	3			NS	NS	NS	NS	NS	NS
	11			NS	NS	NS	NS	NS	NS
	19-27			NS	NS	NS	NS	NS	NS
	35-59			4.75	3.25	0.50	-1.00	3.25	1.75
	67-75			4.50	3.00	0.25	-1.25	3.00	1.50
	83			4.50	3.00	0.25	-1.25	3.00	1.50
	91			4.50	3.00	0.25	-1.25	3.00	1.50
	99-107			NS	NS	NS	NS	NS	NS
	115			NS	NS	NS	NS	NS	NS
	123-179			3.50	2.00	-0.50	-2.00	2.25	0.75
	187			NS	NS	NS	NS	NS	NS
	195-219			NS	NS	NS	NS	NS	NS
	227			NS	NS	NS	NS	NS	NS
	7			NS	NS	NS	NS	NS	NS
6 GHz WIFI (80MHz BW) VLP	23			NS	NS	NS	NS	NS	NS
	39-55			7.25	5.75	3.00	1.50	5.75	4.25
	71			7.00	5.50	2.75	1.25	5.50	4.00
	87			7.00	5.50	2.75	1.25	5.50	4.00
	103			NS	NS	NS	NS	NS	NS
	119			NS	NS	NS	NS	NS	NS
	135-167			6.00	4.50	2.00	0.50	4.75	3.25
	183			NS	NS	NS	NS	NS	NS
	199			NS	NS	NS	NS	NS	NS
	215			NS	NS	NS	NS	NS	NS
	15			NS	NS	NS	NS	NS	NS
6 GHz WIFI (160MHz BW) VLP	47			9.75	8.25	5.50	4.00	8.25	6.75
	79			9.50	8.00	5.25	3.75	8.00	6.50
	111			NS	NS	NS	NS	NS	NS
	143			8.50	7.00	4.50	3.00	7.25	5.75
	175			NS	NS	NS	NS	NS	NS
	207			NS	NS	NS	NS	NS	NS

Note: In MIMO operations, each antenna transmits at maximum allowed powers as indicated above.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 20 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

1.4.3

Reduced WLAN Time-Averaged Output Power

Note: Targets for 802.11ax RU operations can be found in 802.11ax RU SAR Exclusion Appendix.

Table below is applicable in the following conditions:

- Simultaneous conditions with Licensed Bands Antenna 1a/1b active and wPT active
- Simultaneous conditions with Inter-Band ULCA active and wPT active

Mode	Channel	IEEE 802.11 (Maximum in dBm) - Antenna 1a											
		SISO b	SISO b (Nominal)	SISO g (Maximum)	SISO g (Nominal)	SISO n (Maximum)	SISO n (Nominal)	SISO ax SU (Maximum)	SISO ax SU (Nominal)	MIMO g/n (Maximum)	MIMO g/n (Nominal)	MIMO ax SU (Maximum)	MIMO ax SU (Nominal)
2.4 GHz WiFi 20 MHz Bandwidth	1	5.25	3.75	5.25	3.75	5.25	3.75	5.25	3.75	5.25	3.75	5.25	3.75
	2	5.25	3.75	5.25	3.75	5.25	3.75	5.25	3.75	5.25	3.75	5.25	3.75
	3	5.25	3.75	5.25	3.75	5.25	3.75	5.25	3.75	5.25	3.75	5.25	3.75
	4	5.25	3.75	5.25	3.75	5.25	3.75	5.25	3.75	5.25	3.75	5.25	3.75
	5	5.25	3.75	5.25	3.75	5.25	3.75	5.25	3.75	5.25	3.75	5.25	3.75
	6	5.25	3.75	5.25	3.75	5.25	3.75	5.25	3.75	5.25	3.75	5.25	3.75
	7	5.25	3.75	5.25	3.75	5.25	3.75	5.25	3.75	5.25	3.75	5.25	3.75
	8	5.25	3.75	5.25	3.75	5.25	3.75	5.25	3.75	5.25	3.75	5.25	3.75
	9	5.25	3.75	5.25	3.75	5.25	3.75	5.25	3.75	5.25	3.75	5.25	3.75
	10	5.25	3.75	5.25	3.75	5.25	3.75	5.25	3.75	5.25	3.75	5.25	3.75
	11	5.25	3.75	5.25	3.75	5.25	3.75	5.25	3.75	5.25	3.75	5.25	3.75
	12	5.25	3.75	5.25	3.75	5.25	3.75	5.25	3.75	5.25	3.75	5.25	3.75
	13	5.25	3.75	5.25	3.75	5.25	3.75	NS	NS	5.25	3.75	NS	NS

Note: In MIMO operations, each antenna transmits at maximum allowed powers as indicated above.

Table below is applicable in the following conditions:

- Simultaneous conditions with Licensed Bands Antenna 3a/3b and wPT active
- Simultaneous conditions with Inter-Band ULCA active and wPT active

Mode	Channel	IEEE 802.11 (Maximum in dBm) - Antenna 3a											
		SISO b	SISO b (Nominal)	SISO g (Maximum)	SISO g (Nominal)	SISO n (Maximum)	SISO n (Nominal)	SISO ax SU (Maximum)	SISO ax SU (Nominal)	MIMO g/n (Maximum)	MIMO g/n (Nominal)	MIMO ax SU (Maximum)	MIMO ax SU (Nominal)
2.4 GHz WiFi 20 MHz Bandwidth	1	5.00	3.50	5.00	3.50	5.00	3.50	5.00	3.50	5.00	3.50	5.00	3.50
	2	5.00	3.50	5.00	3.50	5.00	3.50	5.00	3.50	5.00	3.50	5.00	3.50
	3	5.00	3.50	5.00	3.50	5.00	3.50	5.00	3.50	5.00	3.50	5.00	3.50
	4	5.00	3.50	5.00	3.50	5.00	3.50	5.00	3.50	5.00	3.50	5.00	3.50
	5	5.00	3.50	5.00	3.50	5.00	3.50	5.00	3.50	5.00	3.50	5.00	3.50
	6	5.00	3.50	5.00	3.50	5.00	3.50	5.00	3.50	5.00	3.50	5.00	3.50
	7	5.00	3.50	5.00	3.50	5.00	3.50	5.00	3.50	5.00	3.50	5.00	3.50
	8	5.00	3.50	5.00	3.50	5.00	3.50	5.00	3.50	5.00	3.50	5.00	3.50
	9	5.00	3.50	5.00	3.50	5.00	3.50	5.00	3.50	5.00	3.50	5.00	3.50
	10	5.00	3.50	5.00	3.50	5.00	3.50	5.00	3.50	5.00	3.50	5.00	3.50
	11	5.00	3.50	5.00	3.50	5.00	3.50	5.00	3.50	5.00	3.50	5.00	3.50
	12	5.00	3.50	5.00	3.50	5.00	3.50	5.00	3.50	5.00	3.50	5.00	3.50
	13	5.00	3.50	5.00	3.50	5.00	3.50	NS	NS	5.00	3.50	NS	NS

Note: In MIMO operations, each antenna transmits at maximum allowed powers as indicated above.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 21 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table below is applicable in the following conditions:

- Simultaneous conditions with Licensed Bands Antenna 1a/1b active and wPT active
- Simultaneous conditions with Inter-Band ULCA active and wPT active

Mode	Channel	IEEE 802.11 (Maximum in dBm) Antenna 15															
		SISO a (Maximum)	SISO a (Maximum)	SISO a/b (Maximum)	SISO a/b (Maximum)	SISO a/c (Maximum)	SISO a/c (Maximum)	SISO a/d (Maximum)	MIMO 2S a/b (Maximum)	MIMO 2S a/c (Maximum)	MIMO 2S a/c (Maximum)	MIMO 2S a/c (Maximum)	MIMO 2S a/c (Maximum)	MIMO 2S a/c (Maximum)	MIMO 2S a/c (Maximum)	MIMO 2S a/c (Maximum)	
5 GHz WFI 20MHz Bandwidth	36	5.00	5.50	5.50	5.50	5.50	5.50	5.00	5.50	5.00	5.50	5.00	5.50	5.00	5.50	5.50	
	40	5.00	5.50	5.50	5.50	5.50	5.50	5.00	5.50	5.00	5.50	5.00	5.50	5.00	5.50	5.50	
	44	5.00	5.50	5.50	5.50	5.50	5.50	5.00	5.50	5.00	5.50	5.00	5.50	5.00	5.50	5.50	
	48	5.00	5.50	5.50	5.50	5.50	5.50	5.00	5.50	5.00	5.50	5.00	5.50	5.00	5.50	5.50	
	52	5.00	5.50	5.50	5.50	5.50	5.50	5.00	5.50	5.00	5.50	5.00	5.50	5.00	5.50	5.50	
	56	5.00	5.50	5.50	5.50	5.50	5.50	5.00	5.50	5.00	5.50	5.00	5.50	5.00	5.50	5.50	
	60	5.00	5.50	5.50	5.50	5.50	5.50	5.00	5.50	5.00	5.50	5.00	5.50	5.00	5.50	5.50	
	64	5.00	5.50	5.50	5.50	5.50	5.50	5.00	5.50	5.00	5.50	5.00	5.50	5.00	5.50	5.50	
	100	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	5.00	
	104	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	5.00	
	108	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	5.00	
	112	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	5.00	
	116	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	5.00	
	120	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	5.00	
	124	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	5.00	
	128	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	5.00	
5 GHz WFI 40MHz Bandwidth	132	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	5.00	
	136	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	5.00	
	140	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	5.00	
	144	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	4.50	5.00	5.00	
	148	3.75	2.25	3.75	2.25	3.75	2.25	3.75	2.25	3.75	2.25	3.75	2.25	3.75	2.25	3.75	
	152	3.75	2.25	3.75	2.25	3.75	2.25	3.75	2.25	3.75	2.25	3.75	2.25	3.75	2.25	3.75	
	156	3.75	2.25	3.75	2.25	3.75	2.25	3.75	2.25	3.75	2.25	3.75	2.25	3.75	2.25	3.75	
	160	3.75	2.25	3.75	2.25	3.75	2.25	3.75	2.25	3.75	2.25	3.75	2.25	3.75	2.25	3.75	
	164	3.75	2.25	3.75	2.25	3.75	2.25	3.75	2.25	3.75	2.25	3.75	2.25	3.75	2.25	3.75	
	168	3.75	2.25	3.75	2.25	3.75	2.25	3.75									

Note: In MIMO operations, each antenna transmits at maximum allowed powers as indicated above.

Table below is applicable in the following conditions:

- Simultaneous conditions with Licensed Bands Antenna 3a/3b active and wPT active
- Simultaneous conditions with Inter-Band ULCA active and wPT active

[illegible]

Note: In MIMO operations, each antenna transmits at maximum allowed powers as indicated above.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 22 of 255

REV 25.0

10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table below is applicable in the following conditions:

- Simultaneous conditions with Licensed Bands Antenna 3a/3b active and wPT active
- Simultaneous conditions with Inter-Band ULCA active and wPT active

Mode	Channel	IEEE 802.11 (Maximum in dBm) - Antenna 3T													
		MIMO CDD		MIMO CDD		MIMO CDD		MIMO CDD		MIMO CDD		MIMO CDD		MIMO CDD	
		as SU (Maximum)	as SU (Nominal)	as SU (Maximum)	as SU (Nominal)	as SU (Maximum)	as SU (Nominal)	as SU (Maximum)	as SU (Nominal)	as SU (Maximum)	as SU (Nominal)	as SU (Maximum)	as SU (Nominal)	as SU (Maximum)	as SU (Nominal)
5 GHz WPI 20 MHz Bandwidth	36	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00
	39	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00
	42	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00
	45	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00
	48	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00
	51	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00
	54	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00
	57	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00
	60	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00
	63	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00	11.50	10.00
	66	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00
	69	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00
	72	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00
	75	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00
	78	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00
	81	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00
	84	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00
	87	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00
	90	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00
5 GHz WPI 40 MHz Bandwidth	102	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00
	105	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00
	108	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00
	111	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00
	114	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00
	117	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00
	120	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00
	123	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00
	126	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00
	129	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00
	132	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00
	135	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00
	138	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00
	141	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00
	144	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00
	147	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75
	150	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75
	153	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75
	156	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75
5 GHz WPI 80 MHz Bandwidth	162	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75
	165	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75
	168	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75
	171	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75
	174	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75
	177	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75
	180	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75
	183	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75
	186	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75
	189	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75	9.25	7.75
5 GHz WPI 160 MHz Bandwidth	194	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00
	197	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00	9.50	8.00

Note: In MIMO operations, each antenna transmits at maximum allowed powers as indicated above.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 23 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table below is applicable in the following conditions:

- Simultaneous conditions with Licensed Bands Antenna 1a/1b active and wPT active
- Simultaneous conditions with Inter-Band ULCA active and wPT active

Mode	Channel	IEEE 802.11 (Maximum in dBm) - Antenna 1b							
		SISO a (Maximum)	SISO a (Nominal)	SISO ax SU (Maximum)	SISO ax SU (Nominal)	MIMO CDD ax SU (Maximum)	MIMO CDD ax SU (Nominal)	MIMO SDM ax SU (Maximum)	MIMO SDM ax SU (Nominal)
6 GHz WIFI (20MHz BW) SP	2	NS	NS	NS	NS	NS	NS	NS	NS
	1	4.75	3.25	4.75	3.25	4.75	3.25	4.75	3.25
	5	4.75	3.25	4.75	3.25	4.75	3.25	4.75	3.25
	9-29	4.75	3.25	4.75	3.25	4.75	3.25	4.75	3.25
	33-61	4.75	3.25	4.75	3.25	4.75	3.25	4.75	3.25
	65-85	5.00	3.50	5.00	3.50	5.00	3.50	5.00	3.50
	89	5.00	3.50	5.00	3.50	5.00	3.50	5.00	3.50
	93	5.00	3.50	5.00	3.50	5.00	3.50	5.00	3.50
	97-113	NS	NS	NS	NS	NS	NS	NS	NS
	117-181	6.00	4.50	6.00	4.50	6.00	4.50	6.00	4.50
	185	NS	NS	NS	NS	NS	NS	NS	NS
	189-225	NS	NS	NS	NS	NS	NS	NS	NS
	229	NS	NS	NS	NS	NS	NS	NS	NS
	233	NS	NS	NS	NS	NS	NS	NS	NS
6 GHz WIFI (40MHz BW) SP	3			4.75	3.25	4.75	3.25	4.75	3.25
	11			4.75	3.25	4.75	3.25	4.75	3.25
	19-27			4.75	3.25	4.75	3.25	4.75	3.25
	35-59			4.75	3.25	4.75	3.25	4.75	3.25
	67-75			5.00	3.50	5.00	3.50	5.00	3.50
	83			5.00	3.50	5.00	3.50	5.00	3.50
	91			5.00	3.50	5.00	3.50	5.00	3.50
	99-107			NS	NS	NS	NS	NS	NS
	115			NS	NS	NS	NS	NS	NS
	123-179			6.00	4.50	6.00	4.50	6.00	4.50
	187			NS	NS	NS	NS	NS	NS
	195-219			NS	NS	NS	NS	NS	NS
	227			NS	NS	NS	NS	NS	NS
	7			4.75	3.25	4.75	3.25	4.75	3.25
6 GHz WIFI (80MHz BW) SP	23			4.75	3.25	4.75	3.25	4.75	3.25
	39-55			4.75	3.25	4.75	3.25	4.75	3.25
	71			5.00	3.50	5.00	3.50	5.00	3.50
	87			5.00	3.50	5.00	3.50	5.00	3.50
	103			NS	NS	NS	NS	NS	NS
	119			NS	NS	NS	NS	NS	NS
	135-167			6.00	4.50	6.00	4.50	6.00	4.50
	183			NS	NS	NS	NS	NS	NS
	199			NS	NS	NS	NS	NS	NS
	215			NS	NS	NS	NS	NS	NS
6 GHz WIFI (160MHz BW) SP	15			4.75	3.25	4.75	3.25	4.75	3.25
	47			4.75	3.25	4.75	3.25	4.75	3.25
	79			5.00	3.50	5.00	3.50	5.00	3.50
	111			NS	NS	NS	NS	NS	NS
	143			6.00	4.50	6.00	4.50	6.00	4.50
	175			NS	NS	NS	NS	NS	NS
	207			NS	NS	NS	NS	NS	NS

Note: In MIMO operations, each antenna transmits at maximum allowed powers as indicated above.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 24 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table below is applicable in the following conditions:

- Simultaneous conditions with Licensed Bands Antenna 1a/1b active and wPT active
- Simultaneous conditions with Inter-Band ULCA active and wPT active

Mode	Channel	IEEE 802.11 (Maximum in dBm) - Antenna 1b							
		SISO	SISO	SISO	SISO	MIMO CDD	MIMO CDD	MIMO SDM	MIMO SDM
		a (Maximum)	a (Nominal)	ax SU (Maximum)	ax SU (Nominal)	ax SU (Maximum)	ax SU (Nominal)	ax SU (Maximum)	ax SU (Nominal)
6 GHz WIFI (20MHz BW) LP	2	NS	NS	NS	NS	NS	NS	NS	NS
	1	3.00	1.50	3.50	2.00	-1.00	-2.50	2.00	0.50
	5	3.00	1.50	3.50	2.00	-1.00	-2.50	2.00	0.50
	9-29	3.00	1.50	3.50	2.00	-1.00	-2.50	2.00	0.50
	33-61	3.50	2.00	4.00	2.50	-0.25	-1.75	2.50	1.00
	65-85	3.25	1.75	3.75	2.25	-0.50	-2.00	2.25	0.75
	89	3.25	1.75	3.75	2.25	-0.50	-2.00	2.25	0.75
	93	3.25	1.75	3.75	2.25	-0.50	-2.00	2.25	0.75
	97-113	2.75	1.25	3.25	1.75	-0.75	-2.25	2.00	0.50
	117-181	2.25	0.75	2.75	1.25	-1.25	-2.75	1.50	0.00
	185	1.75	0.25	2.25	0.75	-1.50	-3.00	1.25	-0.25
	189-225	1.75	0.25	2.25	0.75	-1.50	-3.00	1.25	-0.25
	229	1.75	0.25	2.25	0.75	-1.50	-3.00	1.25	-0.25
	233	1.75	0.25	2.25	0.75	-1.50	-3.00	1.25	-0.25
6 GHz WIFI (40MHz BW) LP	3			4.75	3.25	2.00	0.50	4.75	3.25
	11			4.75	3.25	2.00	0.50	4.75	3.25
	19-27			4.75	3.25	2.00	0.50	4.75	3.25
	35-59			4.75	3.25	2.75	1.25	4.75	3.25
	67-75			5.00	3.50	2.50	1.00	5.00	3.50
	83			5.00	3.50	2.50	1.00	5.00	3.50
	91			5.00	3.50	2.50	1.00	5.00	3.50
	99-107			5.25	3.75	2.25	0.75	5.00	3.50
	115			5.25	3.75	1.75	0.25	4.50	3.00
	123-179			5.75	4.25	1.75	0.25	4.50	3.00
	187			5.25	3.75	1.50	0.00	4.25	2.75
	195-219			5.25	3.75	1.50	0.00	4.25	2.75
	227			5.25	3.75	1.50	0.00	4.25	2.75
6 GHz WIFI (80MHz BW) LP	7			4.75	3.25	4.50	3.00	4.75	3.25
	23			4.75	3.25	4.50	3.00	4.75	3.25
	39-55			4.75	3.25	4.75	3.25	4.75	3.25
	71			5.00	3.50	5.00	3.50	5.00	3.50
	87			5.00	3.50	5.00	3.50	5.00	3.50
	103			5.25	3.75	4.75	3.25	5.25	3.75
	119			6.00	4.50	4.25	2.75	6.00	4.50
	135-167			6.00	4.50	4.25	2.75	6.00	4.50
	183			6.00	4.50	4.00	2.50	6.00	4.50
	199			6.00	4.50	4.00	2.50	6.00	4.50
6 GHz WIFI (160MHz BW) LP	215			6.00	4.50	4.00	2.50	6.00	4.50
	15			4.75	3.25	4.75	3.25	4.75	3.25
	47			4.75	3.25	4.75	3.25	4.75	3.25
	79			5.00	3.50	5.00	3.50	5.00	3.50
	111			5.25	3.75	5.25	3.75	5.25	3.75
	143			6.00	4.50	6.00	4.50	6.00	4.50
	175			6.00	4.50	6.00	4.50	6.00	4.50
	207			6.00	4.50	6.00	4.50	6.00	4.50

Note: In MIMO operations, each antenna transmits at maximum allowed powers as indicated above.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 25 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table below is applicable in the following conditions:

- Simultaneous conditions with Licensed Bands Antenna 1a/1b active and wPT active
- Simultaneous conditions with Inter-Band ULCA active and wPT active

Mode	Channel	IEEE 802.11 (Maximum in dBm) - Antenna 1b							
		SISO	SISO	SISO	SISO	MIMO CDD	MIMO CDD	MIMO SDM	MIMO SDM
		a (Maximum)	a (Nominal)	ax SU (Maximum)	ax SU (Nominal)	ax SU (Maximum)	ax SU (Nominal)	ax SU (Maximum)	ax SU (Nominal)
6 GHz WIFI (20MHz BW) VLP	2	NS	NS	NS	NS	NS	NS	NS	NS
	1	NS	NS	NS	NS	NS	NS	NS	NS
	5	NS	NS	NS	NS	NS	NS	NS	NS
	9-29	NS	NS	NS	NS	NS	NS	NS	NS
	33-61	-0.50	-2.00	0.00	-1.50	-4.25	-5.75	-1.50	-3.00
	65-85	-0.75	-2.25	-0.25	-1.75	NS	NS	-1.75	-3.25
	89	-0.75	-2.25	-0.25	-1.75	NS	NS	-1.75	-3.25
	93	-0.75	-2.25	-0.25	-1.75	NS	NS	-1.75	-3.25
	97-113	NS	NS	NS	NS	NS	NS	NS	NS
	117-181	-1.75	-3.25	-1.25	-2.75	NS	NS	-2.50	-4.00
	185	NS	NS	NS	NS	NS	NS	NS	NS
	189-225	NS	NS	NS	NS	NS	NS	NS	NS
	229	NS	NS	NS	NS	NS	NS	NS	NS
	233	NS	NS	NS	NS	NS	NS	NS	NS
6 GHz WIFI (40MHz BW) VLP	3			NS	NS	NS	NS	NS	NS
	11			NS	NS	NS	NS	NS	NS
	19-27			NS	NS	NS	NS	NS	NS
	35-59			3.00	1.50	-1.25	-2.75	1.50	0.00
	67-75			2.75	1.25	-1.50	-3.00	1.25	-0.25
	83			2.75	1.25	-1.50	-3.00	1.25	-0.25
	91			2.75	1.25	-1.50	-3.00	1.25	-0.25
	99-107			NS	NS	NS	NS	NS	NS
	115			NS	NS	NS	NS	NS	NS
	123-179			1.75	0.25	-2.25	-3.75	0.50	-1.00
	187			NS	NS	NS	NS	NS	NS
	195-219			NS	NS	NS	NS	NS	NS
	227			NS	NS	NS	NS	NS	NS
	7			NS	NS	NS	NS	NS	NS
6 GHz WIFI (80MHz BW) VLP	23			NS	NS	NS	NS	NS	NS
	39-55			4.75	3.25	1.25	-0.25	4.00	2.50
	71			5.00	3.50	1.00	-0.50	3.75	2.25
	87			5.00	3.50	1.00	-0.50	3.75	2.25
	103			NS	NS	NS	NS	NS	NS
	119			NS	NS	NS	NS	NS	NS
	135-167			4.25	2.75	0.25	-1.25	3.00	1.50
	183			NS	NS	NS	NS	NS	NS
	199			NS	NS	NS	NS	NS	NS
	215			NS	NS	NS	NS	NS	NS
	15			NS	NS	NS	NS	NS	NS
6 GHz WIFI (160MHz BW) VLP	47			4.75	3.25	3.75	2.25	4.75	3.25
	79			5.00	3.50	3.50	2.00	5.00	3.50
	111			NS	NS	NS	NS	NS	NS
	143			6.00	4.50	2.75	1.25	5.50	4.00
	175			NS	NS	NS	NS	NS	NS
	207			NS	NS	NS	NS	NS	NS

Note: In MIMO operations, each antenna transmits at maximum allowed powers as indicated above.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 26 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table below is applicable in the following conditions:

- Simultaneous conditions with Licensed Bands Antenna 3a/3b active and wPT active
- Simultaneous conditions with Inter-Band ULCA active and wPT active

Mode	Channel	IEEE 802.11 (Maximum in dBm) - Antenna 3b							
		SISO a (Maximum)	SISO a (Nominal)	SISO ax SU (Maximum)	SISO ax SU (Nominal)	MIMO CDD ax SU (Maximum)	MIMO CDD ax SU (Nominal)	MIMO SDM ax SU (Maximum)	MIMO SDM ax SU (Nominal)
6 GHz WIFI (20MHz BW) SP	2	NS	NS	NS	NS	NS	NS	NS	NS
	1	6.00	4.50	6.00	4.50	6.00	4.50	6.00	4.50
	5	6.00	4.50	6.00	4.50	6.00	4.50	6.00	4.50
	9-29	6.00	4.50	6.00	4.50	6.00	4.50	6.00	4.50
	33-61	6.00	4.50	6.00	4.50	6.00	4.50	6.00	4.50
	65-85	8.00	6.50	8.00	6.50	8.00	6.50	8.00	6.50
	89	8.00	6.50	8.00	6.50	8.00	6.50	8.00	6.50
	93	8.00	6.50	8.00	6.50	8.00	6.50	8.00	6.50
	97-113	NS	NS	NS	NS	NS	NS	NS	NS
	117-181	9.00	7.50	9.00	7.50	9.00	7.50	9.00	7.50
	185	NS	NS	NS	NS	NS	NS	NS	NS
	189-225	NS	NS	NS	NS	NS	NS	NS	NS
	229	NS	NS	NS	NS	NS	NS	NS	NS
	233	NS	NS	NS	NS	NS	NS	NS	NS
6 GHz WIFI (40MHz BW) SP	3			6.00	4.50	6.00	4.50	6.00	4.50
	11			6.00	4.50	6.00	4.50	6.00	4.50
	19-27			6.00	4.50	6.00	4.50	6.00	4.50
	35-59			6.00	4.50	6.00	4.50	6.00	4.50
	67-75			8.00	6.50	8.00	6.50	8.00	6.50
	83			8.00	6.50	8.00	6.50	8.00	6.50
	91			8.00	6.50	8.00	6.50	8.00	6.50
	99-107			NS	NS	NS	NS	NS	NS
	115			NS	NS	NS	NS	NS	NS
	123-179			9.00	7.50	9.00	7.50	9.00	7.50
	187			NS	NS	NS	NS	NS	NS
	195-219			NS	NS	NS	NS	NS	NS
	227			NS	NS	NS	NS	NS	NS
6 GHz WIFI (80MHz BW) SP	7			6.00	4.50	6.00	4.50	6.00	4.50
	23			6.00	4.50	6.00	4.50	6.00	4.50
	39-55			6.00	4.50	6.00	4.50	6.00	4.50
	71			8.00	6.50	8.00	6.50	8.00	6.50
	87			8.00	6.50	8.00	6.50	8.00	6.50
	103			NS	NS	NS	NS	NS	NS
	119			NS	NS	NS	NS	NS	NS
	135-167			9.00	7.50	9.00	7.50	9.00	7.50
	183			NS	NS	NS	NS	NS	NS
	199			NS	NS	NS	NS	NS	NS
	215			NS	NS	NS	NS	NS	NS
6 GHz WIFI (160MHz BW) SP	15			6.00	4.50	6.00	4.50	6.00	4.50
	47			6.00	4.50	6.00	4.50	6.00	4.50
	79			8.00	6.50	8.00	6.50	8.00	6.50
	111			NS	NS	NS	NS	NS	NS
	143			9.00	7.50	9.00	7.50	9.00	7.50
	175			NS	NS	NS	NS	NS	NS
	207			NS	NS	NS	NS	NS	NS

Note: In MIMO operations, each antenna transmits at maximum allowed powers as indicated above.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 27 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table below is applicable in the following conditions:

- Simultaneous conditions with Licensed Bands Antenna 3a/3b active and wPT active
- Simultaneous conditions with Inter-Band ULCA active and wPT active

Mode	Channel	IEEE 802.11 (Maximum in dBm) - Antenna 3b							
		SISO	SISO	SISO	SISO	MIMO CDD	MIMO CDD	MIMO SDM	MIMO SDM
		a (Maximum)	a (Nominal)	ax SU (Maximum)	ax SU (Nominal)	ax SU (Maximum)	ax SU (Nominal)	ax SU (Maximum)	ax SU (Nominal)
6 GHz WIFI (20MHz BW) LP	2	NS	NS	NS	NS	NS	NS	NS	NS
	1	4.75	3.25	5.25	3.75	0.75	-0.75	3.75	2.25
	5	4.75	3.25	5.25	3.75	0.75	-0.75	3.75	2.25
	9-29	4.75	3.25	5.25	3.75	0.75	-0.75	3.75	2.25
	33-61	5.25	3.75	5.75	4.25	1.50	0.00	4.25	2.75
	65-85	5.00	3.50	5.50	4.00	1.25	-0.25	4.00	2.50
	89	5.00	3.50	5.50	4.00	1.25	-0.25	4.00	2.50
	93	5.00	3.50	5.50	4.00	1.25	-0.25	4.00	2.50
	97-113	4.50	3.00	5.00	3.50	1.00	-0.50	3.75	2.25
	117-181	4.00	2.50	4.50	3.00	0.50	-1.00	3.25	1.75
	185	3.50	2.00	4.00	2.50	0.25	-1.25	3.00	1.50
	189-225	3.50	2.00	4.00	2.50	0.25	-1.25	3.00	1.50
	229	3.50	2.00	4.00	2.50	0.25	-1.25	3.00	1.50
	233	3.50	2.00	4.00	2.50	0.25	-1.25	3.00	1.50
6 GHz WIFI (40MHz BW) LP	3			6.00	4.50	3.75	2.25	6.00	4.50
	11			6.00	4.50	3.75	2.25	6.00	4.50
	19-27			6.00	4.50	3.75	2.25	6.00	4.50
	35-59			6.00	4.50	4.50	3.00	6.00	4.50
	67-75			8.00	6.50	4.25	2.75	7.00	5.50
	83			8.00	6.50	4.25	2.75	7.00	5.50
	91			8.00	6.50	4.25	2.75	7.00	5.50
	99-107			7.75	6.25	4.00	2.50	6.75	5.25
	115			7.50	6.00	3.50	2.00	6.25	4.75
	123-179			7.50	6.00	3.50	2.00	6.25	4.75
	187			7.00	5.50	3.25	1.75	6.00	4.50
	195-219			7.00	5.50	3.25	1.75	6.00	4.50
	227			7.00	5.50	3.25	1.75	6.00	4.50
6 GHz WIFI (80MHz BW) LP	7			6.00	4.50	6.00	4.50	6.00	4.50
	23			6.00	4.50	6.00	4.50	6.00	4.50
	39-55			6.00	4.50	6.00	4.50	6.00	4.50
	71			8.00	6.50	6.75	5.25	8.00	6.50
	87			8.00	6.50	6.75	5.25	8.00	6.50
	103			7.75	6.25	6.50	5.00	7.75	6.25
	119			9.00	7.50	6.00	4.50	8.75	7.25
	135-167			9.00	7.50	6.00	4.50	8.75	7.25
	183			9.00	7.50	5.75	4.25	8.50	7.00
	199			8.25	6.75	5.75	4.25	8.25	6.75
	215			8.25	6.75	5.75	4.25	8.25	6.75
6 GHz WIFI (160MHz BW) LP	15			6.00	4.50	6.00	4.50	6.00	4.50
	47			6.00	4.50	6.00	4.50	6.00	4.50
	79			8.00	6.50	8.00	6.50	8.00	6.50
	111			7.75	6.25	7.75	6.25	7.75	6.25
	143			9.00	7.50	8.50	7.00	9.00	7.50
	175			9.00	7.50	8.25	6.75	9.00	7.50
	207			8.25	6.75	8.25	6.75	8.25	6.75

Note: In MIMO operations, each antenna transmits at maximum allowed powers as indicated above.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 28 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table below is applicable in the following conditions:

- Simultaneous conditions with Licensed Bands Antenna 3a/3b active and wPT active
- Simultaneous conditions with Inter-Band ULCA active and wPT active

Mode	Channel	IEEE 802.11 (Maximum in dBm) - Antenna 3b							
		SISO	SISO	SISO	SISO	MIMO CDD	MIMO CDD	MIMO SDM	MIMO SDM
		a (Maximum)	a (Nominal)	ax SU (Maximum)	ax SU (Nominal)	ax SU (Maximum)	ax SU (Nominal)	ax SU (Maximum)	ax SU (Nominal)
6 GHz WiFi (20MHz BW) VLP	2	NS	NS	NS	NS	NS	NS	NS	NS
	1	NS	NS	NS	NS	NS	NS	NS	NS
	5	NS	NS	NS	NS	NS	NS	NS	NS
	9-29	NS	NS	NS	NS	NS	NS	NS	NS
	33-61	1.25	-0.25	1.75	0.25	-2.50	-4.00	0.25	-1.25
	65-85	1.00	-0.50	1.50	0.00	NS	NS	0.00	-1.50
	89	1.00	-0.50	1.50	0.00	NS	NS	0.00	-1.50
	93	1.00	-0.50	1.50	0.00	NS	NS	0.00	-1.50
	97-113	NS	NS	NS	NS	NS	NS	NS	NS
	117-181	0.00	-1.50	0.50	-1.00	NS	NS	-0.75	-2.25
	185	NS	NS	NS	NS	NS	NS	NS	NS
	189-225	NS	NS	NS	NS	NS	NS	NS	NS
	229	NS	NS	NS	NS	NS	NS	NS	NS
	233	NS	NS	NS	NS	NS	NS	NS	NS
6 GHz WiFi (40MHz BW) VLP	3			NS	NS	NS	NS	NS	NS
	11			NS	NS	NS	NS	NS	NS
	19-27			NS	NS	NS	NS	NS	NS
	35-59			4.75	3.25	0.50	-1.00	3.25	1.75
	67-75			4.50	3.00	0.25	-1.25	3.00	1.50
	83			4.50	3.00	0.25	-1.25	3.00	1.50
	91			4.50	3.00	0.25	-1.25	3.00	1.50
	99-107			NS	NS	NS	NS	NS	NS
	115			NS	NS	NS	NS	NS	NS
	123-179			3.50	2.00	-0.50	-2.00	2.25	0.75
	187			NS	NS	NS	NS	NS	NS
	195-219			NS	NS	NS	NS	NS	NS
	227			NS	NS	NS	NS	NS	NS
	7			NS	NS	NS	NS	NS	NS
6 GHz WiFi (80MHz BW) VLP	23			NS	NS	NS	NS	NS	NS
	39-55			6.00	4.50	3.00	1.50	5.75	4.25
	71			7.00	5.50	2.75	1.25	5.50	4.00
	87			7.00	5.50	2.75	1.25	5.50	4.00
	103			NS	NS	NS	NS	NS	NS
	119			NS	NS	NS	NS	NS	NS
	135-167			6.00	4.50	2.00	0.50	4.75	3.25
	183			NS	NS	NS	NS	NS	NS
	199			NS	NS	NS	NS	NS	NS
	215			NS	NS	NS	NS	NS	NS
6 GHz WiFi (160MHz BW) VLP	15			NS	NS	NS	NS	NS	NS
	47			6.00	4.50	5.50	4.00	6.00	4.50
	79			8.00	6.50	5.25	3.75	8.00	6.50
	111			NS	NS	NS	NS	NS	NS
	143			6.50	7.00	4.50	3.00	7.25	5.75
	175			NS	NS	NS	NS	NS	NS
	207			NS	NS	NS	NS	NS	NS

Note: In MIMO operations, each antenna transmits at maximum allowed powers as indicated above.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 29 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table below is applicable in the following conditions:

- Simultaneous conditions with Licensed Bands Antenna 3a/3b active and wPT active
- Simultaneous conditions with Inter-Band ULCA active and wPT active

Mode	Channel	IEEE 802.11 (Maximum in dBm) - Antenna 5T							
		SISO a (Maximum)	SISO a (Nominal)	SISO ax SU (Maximum)	SISO ax SU (Nominal)	MIMO CDD ax SU (Maximum)	MIMO CDD ax SU (Nominal)	MIMO SDM ax SU (Maximum)	MIMO SDM ax SU (Nominal)
6 GHz WIFI (20MHz BW) SP	2	NS	NS	NS	NS	NS	NS	NS	NS
	1	8.25	6.75	8.25	6.75	8.25	6.75	8.25	6.75
	5	8.25	6.75	8.25	6.75	8.25	6.75	8.25	6.75
	9-29	8.25	6.75	8.25	6.75	8.25	6.75	8.25	6.75
	33-61	8.25	6.75	8.25	6.75	8.25	6.75	8.25	6.75
	65-85	8.00	6.50	8.00	6.50	8.00	6.50	8.00	6.50
	89	8.00	6.50	8.00	6.50	8.00	6.50	8.00	6.50
	93	8.00	6.50	8.00	6.50	8.00	6.50	8.00	6.50
	97-113	NS	NS	NS	NS	NS	NS	NS	NS
	117-181	7.00	5.50	7.00	5.50	7.00	5.50	7.00	5.50
	185	NS	NS	NS	NS	NS	NS	NS	NS
	189-225	NS	NS	NS	NS	NS	NS	NS	NS
	229	NS	NS	NS	NS	NS	NS	NS	NS
	233	NS	NS	NS	NS	NS	NS	NS	NS
6 GHz WIFI (40MHz BW) SP	3			8.25	6.75	8.25	6.75	8.25	6.75
	11			8.25	6.75	8.25	6.75	8.25	6.75
	19-27			8.25	6.75	8.25	6.75	8.25	6.75
	35-59			8.25	6.75	8.25	6.75	8.25	6.75
	67-75			8.00	6.50	8.00	6.50	8.00	6.50
	83			8.00	6.50	8.00	6.50	8.00	6.50
	91			8.00	6.50	8.00	6.50	8.00	6.50
	99-107			NS	NS	NS	NS	NS	NS
	115			NS	NS	NS	NS	NS	NS
	123-179			7.00	5.50	7.00	5.50	7.00	5.50
	187			NS	NS	NS	NS	NS	NS
	195-219			NS	NS	NS	NS	NS	NS
	227			NS	NS	NS	NS	NS	NS
6 GHz WIFI (80MHz BW) SP	7			8.25	6.75	8.25	6.75	8.25	6.75
	23			8.25	6.75	8.25	6.75	8.25	6.75
	39-55			8.25	6.75	8.25	6.75	8.25	6.75
	71			8.00	6.50	8.00	6.50	8.00	6.50
	87			8.00	6.50	8.00	6.50	8.00	6.50
	103			NS	NS	NS	NS	NS	NS
	119			NS	NS	NS	NS	NS	NS
	135-167			7.00	5.50	7.00	5.50	7.00	5.50
	183			NS	NS	NS	NS	NS	NS
	199			NS	NS	NS	NS	NS	NS
	215			NS	NS	NS	NS	NS	NS
6 GHz WIFI (160MHz BW) SP	15			8.25	6.75	8.25	6.75	8.25	6.75
	47			8.25	6.75	8.25	6.75	8.25	6.75
	79			8.00	6.50	8.00	6.50	8.00	6.50
	111			NS	NS	NS	NS	NS	NS
	143			7.00	5.50	7.00	5.50	7.00	5.50
	175			NS	NS	NS	NS	NS	NS
	207			NS	NS	NS	NS	NS	NS

Note: In MIMO operations, each antenna transmits at maximum allowed powers as indicated above.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 30 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table below is applicable in the following conditions:

- Simultaneous conditions with Licensed Bands Antenna 3a/3b active and wPT active
- Simultaneous conditions with Inter-Band ULCA active and wPT active

Mode	Channel	IEEE 802.11 (Maximum in dBm) - Antenna 5T							
		SISO	SISO	SISO	SISO	MIMO CDD	MIMO CDD	MIMO SDM	MIMO SDM
		a (Maximum)	a (Nominal)	ax SU (Maximum)	ax SU (Nominal)	ax SU (Maximum)	ax SU (Nominal)	ax SU (Maximum)	ax SU (Nominal)
6 GHz WIFI (20MHz BW) LP	2	NS	NS	NS	NS	NS	NS	NS	NS
	1	4.75	3.25	5.25	3.75	0.75	-0.75	3.75	2.25
	5	4.75	3.25	5.25	3.75	0.75	-0.75	3.75	2.25
	9-29	4.75	3.25	5.25	3.75	0.75	-0.75	3.75	2.25
	33-61	5.25	3.75	5.75	4.25	1.50	0.00	4.25	2.75
	65-85	5.00	3.50	5.50	4.00	1.25	-0.25	4.00	2.50
	89	5.00	3.50	5.50	4.00	1.25	-0.25	4.00	2.50
	93	5.00	3.50	5.50	4.00	1.25	-0.25	4.00	2.50
	97-113	4.50	3.00	5.00	3.50	1.00	-0.50	3.75	2.25
	117-181	4.00	2.50	4.50	3.00	0.50	-1.00	3.25	1.75
	185	3.50	2.00	4.00	2.50	0.25	-1.25	3.00	1.50
	189-225	3.50	2.00	4.00	2.50	0.25	-1.25	3.00	1.50
	229	3.50	2.00	4.00	2.50	0.25	-1.25	3.00	1.50
	233	3.50	2.00	4.00	2.50	0.25	-1.25	3.00	1.50
6 GHz WIFI (40MHz BW) LP	3			8.25	6.75	3.75	2.25	6.75	5.25
	11			8.25	6.75	3.75	2.25	6.75	5.25
	19-27			8.25	6.75	3.75	2.25	6.75	5.25
	35-59			8.25	6.75	4.50	3.00	7.25	5.75
	67-75			8.00	6.50	4.25	2.75	7.00	5.50
	83			8.00	6.50	4.25	2.75	7.00	5.50
	91			8.00	6.50	4.25	2.75	7.00	5.50
	99-107			7.75	6.25	4.00	2.50	6.75	5.25
	115			7.50	6.00	3.50	2.00	6.25	4.75
	123-179			7.00	5.50	3.50	2.00	6.25	4.75
	187			7.00	5.50	3.25	1.75	6.00	4.50
	195-219			7.00	5.50	3.25	1.75	6.00	4.50
	227			7.00	5.50	3.25	1.75	6.00	4.50
6 GHz WIFI (80MHz BW) LP	7			8.25	6.75	6.25	4.75	8.25	6.75
	23			8.25	6.75	6.25	4.75	8.25	6.75
	39-55			8.25	6.75	7.00	5.50	8.25	6.75
	71			8.00	6.50	6.75	5.25	8.00	6.50
	87			8.00	6.50	6.75	5.25	8.00	6.50
	103			7.75	6.25	6.50	5.00	7.75	6.25
	119			7.00	5.50	6.00	4.50	7.00	5.50
	135-167			7.00	5.50	6.00	4.50	7.00	5.50
	183			7.00	5.50	5.75	4.25	7.00	5.50
	199			7.00	5.50	5.75	4.25	7.00	5.50
6 GHz WIFI (160MHz BW) LP	215			7.00	5.50	5.75	4.25	7.00	5.50
	15			8.25	6.75	8.25	6.75	8.25	6.75
	47			8.25	6.75	8.25	6.75	8.25	6.75
	79			8.00	6.50	8.00	6.50	8.00	6.50
	111			7.75	6.25	7.75	6.25	7.75	6.25
	143			7.00	5.50	7.00	5.50	7.00	5.50
	175			7.00	5.50	7.00	5.50	7.00	5.50
	207			7.00	5.50	7.00	5.50	7.00	5.50

Note: In MIMO operations, each antenna transmits at maximum allowed powers as indicated above.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 31 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table below is applicable in the following conditions:

- Simultaneous conditions with Licensed Bands Antenna 3a/3b active and wPT active
- Simultaneous conditions with Inter-Band ULCA active and wPT active

Mode	Channel	IEEE 802.11 (Maximum in dBm) - Antenna 5T							
		SISO	SISO	SISO	SISO	MIMO CDD	MIMO CDD	MIMO SDM	MIMO SDM
		a (Maximum)	a (Nominal)	ax SU (Maximum)	ax SU (Nominal)	ax SU (Maximum)	ax SU (Nominal)	ax SU (Maximum)	ax SU (Nominal)
6 GHz WiFi (20MHz BW) VLP	2	NS	NS	NS	NS	NS	NS	NS	NS
	1	NS	NS	NS	NS	NS	NS	NS	NS
	5	NS	NS	NS	NS	NS	NS	NS	NS
	9-29	NS	NS	NS	NS	NS	NS	NS	NS
	33-61	1.25	-0.25	1.75	0.25	-2.50	-4.00	0.25	-1.25
	65-85	1.00	-0.50	1.50	0.00	NS	NS	0.00	-1.50
	89	1.00	-0.50	1.50	0.00	NS	NS	0.00	-1.50
	93	1.00	-0.50	1.50	0.00	NS	NS	0.00	-1.50
	97-113	NS	NS	NS	NS	NS	NS	NS	NS
	117-181	0.00	-1.50	0.50	-1.00	NS	NS	-0.75	-2.25
	185	NS	NS	NS	NS	NS	NS	NS	NS
	189-225	NS	NS	NS	NS	NS	NS	NS	NS
	229	NS	NS	NS	NS	NS	NS	NS	NS
	233	NS	NS	NS	NS	NS	NS	NS	NS
6 GHz WiFi (40MHz BW) VLP	3			NS	NS	NS	NS	NS	NS
	11			NS	NS	NS	NS	NS	NS
	19-27			NS	NS	NS	NS	NS	NS
	35-59			4.75	3.25	0.50	-1.00	3.25	1.75
	67-75			4.50	3.00	0.25	-1.25	3.00	1.50
	83			4.50	3.00	0.25	-1.25	3.00	1.50
	91			4.50	3.00	0.25	-1.25	3.00	1.50
	99-107			NS	NS	NS	NS	NS	NS
	115			NS	NS	NS	NS	NS	NS
	123-179			3.50	2.00	-0.50	-2.00	2.25	0.75
	187			NS	NS	NS	NS	NS	NS
	195-219			NS	NS	NS	NS	NS	NS
	227			NS	NS	NS	NS	NS	NS
	7			NS	NS	NS	NS	NS	NS
	23			NS	NS	NS	NS	NS	NS
6 GHz WiFi (80MHz BW) VLP	39-55			7.25	5.75	3.00	1.50	5.75	4.25
	71			7.00	5.50	2.75	1.25	5.50	4.00
	87			7.00	5.50	2.75	1.25	5.50	4.00
	103			NS	NS	NS	NS	NS	NS
	119			NS	NS	NS	NS	NS	NS
	135-167			6.00	4.50	2.00	0.50	4.75	3.25
	183			NS	NS	NS	NS	NS	NS
	199			NS	NS	NS	NS	NS	NS
	215			NS	NS	NS	NS	NS	NS
	25			NS	NS	NS	NS	NS	NS
6 GHz WiFi (160MHz BW) VLP	47			8.25	6.75	5.50	4.00	8.25	6.75
	79			8.00	6.50	5.25	3.75	8.00	6.50
	111			NS	NS	NS	NS	NS	NS
	143			7.00	5.50	4.50	3.00	7.00	5.50
	175			NS	NS	NS	NS	NS	NS
	207			NS	NS	NS	NS	NS	NS

Note: In MIMO operations, each antenna transmits at maximum allowed powers as indicated above.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 32 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

1.4.4

Bluetooth Maximum Output Power

Mode / Band		Modulated Average (ePA) Single Tx Chain (dBm) Antenna 3a	Modulated Average (iPA) Single Tx Chain (dBm) Antenna 3a
Bluetooth BDR	Maximum	12.00	11.00
	Nominal	10.50	9.50
Bluetooth EDR	Maximum	12.00	7.00
	Nominal	10.50	5.50
Bluetooth LE	Maximum	12.00	11.00
	Nominal	10.50	9.50
Bluetooth HDR4	Maximum	12.00	4.50
	Nominal	10.50	3.00
Bluetooth HDR8	Maximum	12.00	4.50
	Nominal	10.50	3.00

Mode / Band		Modulated Average (ePA) TXBF (dBm) Antenna 3a	Modulated Average (iPA) TXBF (dBm) Antenna 3a
Bluetooth BDR	Maximum	7.50	7.50
	Nominal	6.00	6.00
Bluetooth EDR	Maximum	7.50	7.00
	Nominal	6.00	5.50
Bluetooth LE	Maximum	7.50	7.50
	Nominal	6.00	6.00
Bluetooth HDR4	Maximum	7.50	4.50
	Nominal	6.00	3.00
Bluetooth HDR8	Maximum	7.50	4.50
	Nominal	6.00	3.00

Note: in TxBF operations, each antenna transmits at maximum allowed powers indicated above.

Mode / Band		Modulated Average (ePA) Single Tx Chain (dBm) Antenna 1a	Modulated Average (iPA) Single Tx Chain (dBm) Antenna 1a
Bluetooth BDR	Maximum	12.50	10.50
	Nominal	11.00	9.00
Bluetooth EDR	Maximum	12.50	6.50
	Nominal	11.00	5.00
Bluetooth LE	Maximum	12.50	10.50
	Nominal	11.00	9.00
Bluetooth HDR4	Maximum	12.00	4.00
	Nominal	10.50	2.50
Bluetooth HDR8	Maximum	12.00	4.00
	Nominal	10.50	2.50

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 33 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Mode / Band		Modulated Average (ePA) TXBF (dBm) Antenna 1a	Modulated Average (iPA) TXBF (dBm) Antenna 1a
Bluetooth BDR	Maximum	8.00	8.00
	Nominal	6.50	6.50
Bluetooth EDR	Maximum	8.00	6.50
	Nominal	6.50	5.00
Bluetooth LE	Maximum	8.00	8.00
	Nominal	6.50	6.50
Bluetooth HDR4	Maximum	8.00	4.00
	Nominal	6.50	2.50
Bluetooth HDR8	Maximum	8.00	4.00
	Nominal	6.50	2.50

Note: in TxBF operations, each antenna transmits at maximum allowed powers indicated above.

1.4.5 Bluetooth Reduced Output Power

Table below is applicable in the following conditions:

- Simultaneous conditions with Licensed Bands Antenna 3a/3b and wPT active
- Simultaneous conditions with Licensed Bands Antenna 1a/1b/2/4. 5/6 GHz WLAN Ant 3b and wPT active
- Simultaneous conditions with 5/6 GHz WLAN Ant 3b and wPT active

Mode / Band		Modulated Average (ePA) Single Tx Chain (dBm) Antenna 3a	Modulated Average (iPA) Single Tx Chain (dBm) Antenna 3a
Bluetooth BDR	Maximum	7.50	7.50
	Nominal	6.00	6.00
Bluetooth EDR	Maximum	7.50	7.00
	Nominal	6.00	5.50
Bluetooth LE	Maximum	7.50	7.50
	Nominal	6.00	6.00
Bluetooth HDR4	Maximum	7.50	4.50
	Nominal	6.00	3.00
Bluetooth HDR8	Maximum	7.50	4.50
	Nominal	6.00	3.00

Mode / Band		Modulated Average (ePA) TXBF (dBm) Antenna 3a	Modulated Average (iPA) TXBF (dBm) Antenna 3a
Bluetooth BDR	Maximum	7.50	7.50
	Nominal	6.00	6.00
Bluetooth EDR	Maximum	7.50	7.00
	Nominal	6.00	5.50
Bluetooth LE	Maximum	7.50	7.50
	Nominal	6.00	6.00
Bluetooth HDR4	Maximum	7.50	4.50
	Nominal	6.00	3.00
Bluetooth HDR8	Maximum	7.50	4.50
	Nominal	6.00	3.00

Note: in TxBF operations, each antenna transmits at maximum allowed powers indicated above.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 34 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table below is applicable in the following conditions:

- Simultaneous conditions with Licensed Bands Antenna 3a/3b, 5/6 GHz WLAN Ant 3b and wPT active
- Simultaneous conditions with Inter-Band ULCA active and wPT active

Mode / Band		Modulated Average (ePA) Single Tx Chain (dBm) Antenna 3a	Modulated Average (iPA) Single Tx Chain (dBm) Antenna 3a
Bluetooth BDR	Maximum	5.00	5.00
	Nominal	3.50	3.50
Bluetooth EDR	Maximum	5.00	5.00
	Nominal	3.50	3.50
Bluetooth LE	Maximum	5.00	5.00
	Nominal	3.50	3.50
Bluetooth HDR4	Maximum	5.00	4.50
	Nominal	3.50	3.00
Bluetooth HDR8	Maximum	5.00	4.50
	Nominal	3.50	3.00

Mode / Band		Modulated Average (ePA) TXBF (dBm) Antenna 3a	Modulated Average (iPA) TXBF (dBm) Antenna 3a
Bluetooth BDR	Maximum	5.00	5.00
	Nominal	3.50	3.50
Bluetooth EDR	Maximum	5.00	5.00
	Nominal	3.50	3.50
Bluetooth LE	Maximum	5.00	5.00
	Nominal	3.50	3.50
Bluetooth HDR4	Maximum	5.00	4.50
	Nominal	3.50	3.00
Bluetooth HDR8	Maximum	5.00	4.50
	Nominal	3.50	3.00

Note: in TxBF operations, each antenna transmits at maximum allowed powers indicated above.

Table below is applicable in the following conditions:

- Simultaneous conditions with Licensed Bands Antenna 1a/1b and WPT active
- Simultaneous conditions Antenna 2/3a/3b/4, 5/6 GHz WLAN Ant 1b and WPT active
- Simultaneous conditions with 5/6 GHz WLAN Ant 1b and WPT active

Mode / Band		Modulated Average (ePA) Single Tx Chain (dBm) Antenna 1a	Modulated Average (iPA) Single Tx Chain (dBm) Antenna 1a
Bluetooth BDR	Maximum	8.00	8.00
	Nominal	6.50	6.50
Bluetooth EDR	Maximum	8.00	6.50
	Nominal	6.50	5.00
Bluetooth LE	Maximum	8.00	8.00
	Nominal	6.50	6.50
Bluetooth HDR4	Maximum	8.00	4.00
	Nominal	6.50	2.50
Bluetooth HDR8	Maximum	8.00	4.00
	Nominal	6.50	2.50

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 35 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Mode / Band		Modulated Average (ePA) TXBF (dBm) Antenna 1a	Modulated Average (iPA) TXBF (dBm) Antenna 1a
Bluetooth BDR	Maximum	8.00	8.00
	Nominal	6.50	6.50
Bluetooth EDR	Maximum	8.00	6.50
	Nominal	6.50	5.00
Bluetooth LE	Maximum	8.00	8.00
	Nominal	6.50	6.50
Bluetooth HDR4	Maximum	8.00	4.00
	Nominal	6.50	2.50
Bluetooth HDR8	Maximum	8.00	4.00
	Nominal	6.50	2.50

Note: in TxBF operations, each antenna transmits at maximum allowed powers indicated above.

Table below is applicable in the following conditions:

- Simultaneous conditions with Licensed Bands Antenna 1a/1b active, 5/6 GHz WLAN Ant 1b and wPT active
- Simultaneous conditions with Inter-Band ULCA active and wPT active

Mode / Band		Modulated Average (ePA) Single Tx Chain (dBm) Antenna 1a	Modulated Average (iPA) Single Tx Chain (dBm) Antenna 1a
Bluetooth BDR	Maximum	5.50	5.50
	Nominal	4.00	4.00
Bluetooth EDR	Maximum	5.50	5.50
	Nominal	4.00	4.00
Bluetooth LE	Maximum	5.50	5.50
	Nominal	4.00	4.00
Bluetooth HDR4	Maximum	5.50	4.00
	Nominal	4.00	2.50
Bluetooth HDR8	Maximum	5.50	4.00
	Nominal	4.00	2.50

Mode / Band		Modulated Average (ePA) TXBF (dBm) Antenna 1a	Modulated Average (iPA) TXBF (dBm) Antenna 1a
Bluetooth BDR	Maximum	5.50	5.50
	Nominal	4.00	4.00
Bluetooth EDR	Maximum	5.50	5.50
	Nominal	4.00	4.00
Bluetooth LE	Maximum	5.50	5.50
	Nominal	4.00	4.00
Bluetooth HDR4	Maximum	5.50	4.00
	Nominal	4.00	2.50
Bluetooth HDR8	Maximum	5.50	4.00
	Nominal	4.00	2.50

Note: in TxBF operations, each antenna transmits at maximum allowed powers indicated above.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 36 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

1.4.6 802.15.4 Maximum Output Power

Mode / Band		Modulated Average (ePA) Single Tx Chain (dBm) Antenna 3a	Modulated Average (iPA) Single Tx Chain (dBm) Antenna 3a
802.15.4	Maximum	12.50	11.00
	Nominal	11.00	9.50

Mode / Band		Modulated Average (ePA) Single Tx Chain (dBm) Antenna 1a	Modulated Average (iPA) Single Tx Chain (dBm) Antenna 1a
802.15.4	Maximum	12.50	10.50
	Nominal	11.00	9.00

1.4.7 802.15.4 Reduced Output Power

Table below is applicable in the following conditions:

- Simultaneous conditions with Licensed Bands Antenna 3a/3b active and wPT active
- Simultaneous conditions with Licensed Bands Antenna 1a/1b/2/4, 5/6 GHz WLAN Ant 3b and wPT active
- Simultaneous conditions with 5/6 GHz WLAN Ant 3b and wPT active

Mode / Band		Modulated Average (ePA) Single Tx Chain (dBm) Antenna 3a	Modulated Average (iPA) Single Tx Chain (dBm) Antenna 3a
802.15.4	Maximum	8.00	8.00
	Nominal	6.50	6.50

Table below is applicable in the following conditions:

- Simultaneous conditions with Licensed Bands Antenna 3a/3b, 5/6 GHz WLAN Ant 3B and WPT active
- Simultaneous conditions with Inter-Band ULCA active and wPT active

Mode / Band		Modulated Average (ePA) Single Tx Chain (dBm) Antenna 3a	Modulated Average (iPA) Single Tx Chain (dBm) Antenna 3a
802.15.4	Maximum	5.50	5.50
	Nominal	4.00	4.00

Table below is applicable in the following conditions:

- Simultaneous conditions with Licensed Bands Antenna 1a/1b and WPT active
- Simultaneous conditions with Licensed Bands Antenna 2/3a/3b/4, 5/6 GHz WLAN Ant 1B and WPT active
- Simultaneous conditions with 5/6 GHz WLAN Ant 1b and wPT active

Mode / Band		Modulated Average (ePA) Single Tx Chain (dBm) Antenna 1a	Modulated Average (iPA) Single Tx Chain (dBm) Antenna 1a
802.15.4	Maximum	8.00	8.00
	Nominal	6.50	6.50

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 37 of 255

REV 25.0
10/16/2024

Table below is applicable in the following conditions:

- Simultaneous conditions with Licensed Bands Antenna 1a/1b active, 5/6 GHz WLAN Ant 1B and WPT active
- Simultaneous conditions with Inter-Band ULCA active and wPT active

Mode / Band		Modulated Average (ePA) Single Tx Chain (dBm) Antenna 1a	Modulated Average (iPA) Single Tx Chain (dBm) Antenna 1a
802.15.4	Maximum	5.50	5.50
	Nominal	4.00	4.00

1.4.8 NB UNII Maximum Output Power

Mode / Band		Modulated Average (ePA) Single Tx Chain (dBm) Antenna 5T	Modulated Average (iPA) Single Tx Chain (dBm) Antenna 5T
NB UNII-1 BDR	Maximum	10.00	5.00
	Nominal	8.50	3.50
NB UNII-1 HDR4	Maximum	12.50	-0.50
	Nominal	11.00	-2.00
NB UNII-1 HDR8	Maximum	12.50	-0.50
	Nominal	11.00	-2.00

Mode / Band		Modulated Average (ePA) TXBF (dBm) Antenna 5T	Modulated Average (iPA) TXBF (dBm) Antenna 5T
NB UNII-1 BDR	Maximum	7.00	3.50
	Nominal	5.50	2.00
NB UNII-1 HDR4	Maximum	9.50	-2.00
	Nominal	8.00	-3.50
NB UNII-1 HDR8	Maximum	12.00	-2.00
	Nominal	10.50	-3.50

Note: In TxBF operations, each antenna transmits at maximum allowed powers as indicated above.

Mode / Band		Modulated Average (ePA) Single Tx Chain (dBm) Antenna 3b	Modulated Average (iPA) Single Tx Chain (dBm) Antenna 3b
NB UNII-1 BDR	Maximum	10.00	4.00
	Nominal	8.50	2.50
NB UNII-1 HDR4	Maximum	11.50	-2.00
	Nominal	10.00	-3.50
NB UNII-1 HDR8	Maximum	11.50	-2.00
	Nominal	10.00	-3.50

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 38 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Mode / Band		Modulated Average (ePA) TXBF (dBm) Antenna 3b	Modulated Average (iPA) TXBF (dBm) Antenna 3b
NB UNII-1 BDR	Maximum	7.00	2.50
	Nominal	5.50	1.00
NB UNII-1 HDR4	Maximum	9.50	-3.50
	Nominal	8.00	-5.00
NB UNII-1 HDR8	Maximum	11.50	-3.50
	Nominal	10.00	-5.00

Note: In TxBF operations, each antenna transmits at maximum allowed powers as indicated above.

Mode / Band		Modulated Average (ePA) Single Tx Chain (dBm) Antenna 1b	Modulated Average (iPA) Single Tx Chain (dBm) Antenna 1b
NB UNII-1 BDR	Maximum	10.00	2.50
	Nominal	8.50	1.00
NB UNII-1 HDR4	Maximum	10.50	-3.50
	Nominal	9.00	-5.00
NB UNII-1 HDR8	Maximum	10.50	-3.50
	Nominal	9.00	-5.00

Mode / Band		Modulated Average (ePA) Single Tx Chain (dBm) Antenna 5T	Modulated Average (iPA) Single Tx Chain (dBm) Antenna 5T
NB UNII-3 BDR	Maximum	13.50	5.50
	Nominal	12.00	4.00
NB UNII-3 HDR4	Maximum	13.50	0.00
	Nominal	12.00	-1.50
NB UNII-3 HDR8	Maximum	13.50	0.00
	Nominal	12.00	-1.50

Mode / Band		Modulated Average (ePA) TXBF (dBm) Antenna 5T	Modulated Average (iPA) TXBF (dBm) Antenna 5T
NB UNII-3 BDR	Maximum	13.50	5.00
	Nominal	12.00	3.50
NB UNII-3 HDR4	Maximum	13.50	-1.50
	Nominal	12.00	-3.00
NB UNII-3 HDR8	Maximum	13.50	-1.50
	Nominal	12.00	-3.00

Note: In TxBF operations, each antenna transmits at maximum allowed powers as indicated above.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 39 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Mode / Band		Modulated Average (ePA) Single Tx Chain (dBm) Antenna 3b	Modulated Average (iPA) Single Tx Chain (dBm) Antenna 3b
NB UNII-3 BDR	Maximum	11.50	4.50
	Nominal	10.00	3.00
NB UNII-3 HDR4	Maximum	11.50	-1.50
	Nominal	10.00	-3.00
NB UNII-3 HDR8	Maximum	11.50	-1.50
	Nominal	10.00	-3.00

Mode / Band		Modulated Average (ePA) TXBF (dBm) Antenna 3b	Modulated Average (iPA) TXBF (dBm) Antenna 3b
NB UNII-3 BDR	Maximum	11.50	4.00
	Nominal	10.00	2.50
NB UNII-3 HDR4	Maximum	11.50	-2.50
	Nominal	10.00	-4.00
NB UNII-3 HDR8	Maximum	11.50	-2.50
	Nominal	10.00	-4.00

Note: In TxBF operations, each antenna transmits at maximum allowed powers as indicated above.

Mode / Band		Modulated Average (ePA) Single Tx Chain (dBm) Antenna 1b	Modulated Average (iPA) Single Tx Chain (dBm) Antenna 1b
NB UNII-3 BDR	Maximum	11.00	3.00
	Nominal	9.50	1.50
NB UNII-3 HDR4	Maximum	11.00	-3.00
	Nominal	9.50	-4.50
NB UNII-3 HDR8	Maximum	11.00	-3.00
	Nominal	9.50	-4.50

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 40 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

1.4.9 NB UNII Reduced Output Power

Table below is applicable in the following conditions:

- Simultaneous conditions with Licensed Bands Antenna 3a/3b active and 2.4 GHz WLAN
- Simultaneous conditions with conditions with Inter-Band ULCA active

Mode / Band		Modulated Average (ePA) Single Tx Chain (dBm) Antenna 5T	Modulated Average (iPA) Single Tx Chain (dBm) Antenna 5T
NB UNII-1 BDR	Maximum	10.00	5.00
	Nominal	8.50	3.50
NB UNII-1 HDR4	Maximum	12.00	-0.50
	Nominal	10.50	-2.00
NB UNII-1 HDR8	Maximum	12.00	-0.50
	Nominal	10.50	-2.00

Mode / Band		Modulated Average (ePA) TXBF (dBm) Antenna 5T	Modulated Average (iPA) TXBF (dBm) Antenna 5T
NB UNII-1 BDR	Maximum	7.00	3.50
	Nominal	5.50	2.00
NB UNII-1 HDR4	Maximum	9.50	-2.00
	Nominal	8.00	-3.50
NB UNII-1 HDR8	Maximum	12.00	-2.00
	Nominal	10.50	-3.50

Note: In TxBF operations, each antenna transmits at maximum allowed powers as indicated above.

Table below is applicable in the following conditions:

- Simultaneous conditions with Licensed Bands Antenna 3a/3b and WPT active
- Simultaneous conditions with Licensed Bands Antenna 2/1a/1b/4, 2.4 GHz WLAN and WPT active
- Simultaneous conditions with 2.4 GHz WLAN and WPT active

Mode / Band		Modulated Average (ePA) Single Tx Chain (dBm) Antenna 3b	Modulated Average (iPA) Single Tx Chain (dBm) Antenna 3b
NB UNII-1 BDR	Maximum	7.00	4.00
	Nominal	5.50	2.50
NB UNII-1 HDR4	Maximum	7.00	-2.00
	Nominal	5.50	-3.50
NB UNII-1 HDR8	Maximum	7.00	-2.00
	Nominal	5.50	-3.50

Mode / Band		Modulated Average (ePA) TXBF (dBm) Antenna 3b	Modulated Average (iPA) TXBF (dBm) Antenna 3b
NB UNII-1 BDR	Maximum	7.00	2.50
	Nominal	5.50	1.00
NB UNII-1 HDR4	Maximum	7.00	-3.50
	Nominal	5.50	-5.00
NB UNII-1 HDR8	Maximum	7.00	-3.50
	Nominal	5.50	-5.00

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 41 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Note: In TxBF operations, each antenna transmits at maximum allowed powers as indicated above.

Table below is applicable in the following conditions:

- Simultaneous conditions with Licensed Bands Antenna 3a/3b Active and WPT active and 2.4 GHz WLAN
- Simultaneous conditions with Inter-Band ULCA active and wPT active

Mode / Band		Modulated Average (ePA) Single Tx Chain (dBm) Antenna 3b	Modulated Average (iPA) Single Tx Chain (dBm) Antenna 3b
NB UNII-1 BDR	Maximum	4.50	4.00
	Nominal	3.00	2.50
NB UNII-1 HDR4	Maximum	4.50	-2.00
	Nominal	3.00	-3.50
NB UNII-1 HDR8	Maximum	4.50	-2.00
	Nominal	3.00	-3.50

Mode / Band		Modulated Average (ePA) TXBF (dBm) Antenna 3b	Modulated Average (iPA) TXBF (dBm) Antenna 3b
NB UNII-1 BDR	Maximum	4.50	2.50
	Nominal	3.00	1.00
NB UNII-1 HDR4	Maximum	4.50	-3.50
	Nominal	3.00	-5.00
NB UNII-1 HDR8	Maximum	4.50	-3.50
	Nominal	3.00	-5.00

Note: In TxBF operations, each antenna transmits at maximum allowed powers as indicated above.

Table below is applicable in the following conditions:

- Simultaneous conditions with Licensed Bands Antenna 1a/1b and wPT
- Simultaneous conditions with Licensed Bands Antenna 2/3a/3b/4, 2.4 GHz WLAN and wPT active
- Simultaneous conditions with 2.4 GHz WLAN and wPT active

Mode / Band		Modulated Average (ePA) Single Tx Chain (dBm) Antenna 1b	Modulated Average (iPA) Single Tx Chain (dBm) Antenna 1b
NB UNII-1 BDR	Maximum	7.00	2.50
	Nominal	5.50	1.00
NB UNII-1 HDR4	Maximum	7.00	-3.50
	Nominal	5.50	-5.00
NB UNII-1 HDR8	Maximum	7.00	-3.50
	Nominal	5.50	-5.00

Table below is applicable in the following conditions:

- Simultaneous conditions with Licensed Bands Antenna 1a/1b active and 2.4 GHz WLAN and WPT active
- Simultaneous conditions with Inter-Band ULCA active and wPT active

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 42 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Mode / Band		Modulated Average (ePA) Single Tx Chain (dBm) Antenna 1b	Modulated Average (iPA) Single Tx Chain (dBm) Antenna 1b
NB UNII-1 BDR	Maximum	4.50	2.50
	Nominal	3.00	1.00
NB UNII-1 HDR4	Maximum	4.50	-3.50
	Nominal	3.00	-5.00
NB UNII-1 HDR8	Maximum	4.50	-3.50
	Nominal	3.00	-5.00

Table below is applicable in the following conditions:

- Simultaneous conditions with Licensed Bands Antenna 3a/3b and WPT active
- Simultaneous conditions with Licensed Bands Antenna 2/1a/1b/4, 2.4 GHz WLAN and WPT active
- Simultaneous conditions with 2.4 GHz WLAN Active and wPT active

Mode / Band		Modulated Average (ePA) Single Tx Chain (dBm) Antenna 5T	Modulated Average (iPA) Single Tx Chain (dBm) Antenna 5T
NB UNII-3 BDR	Maximum	12.00	5.50
	Nominal	10.50	4.00
NB UNII-3 HDR4	Maximum	12.00	0.00
	Nominal	10.50	-1.50
NB UNII-3 HDR8	Maximum	12.00	0.00
	Nominal	10.50	-1.50

Mode / Band		Modulated Average (ePA) TXBF (dBm) Antenna 5T	Modulated Average (iPA) TXBF (dBm) Antenna 5T
NB UNII-3 BDR	Maximum	12.00	5.00
	Nominal	10.50	3.50
NB UNII-3 HDR4	Maximum	12.00	-1.50
	Nominal	10.50	-3.00
NB UNII-3 HDR8	Maximum	12.00	-1.50
	Nominal	10.50	-3.00

Note: In TxBF operations, each antenna transmits at maximum allowed powers as indicated above.

Table below is applicable in the following conditions:

- Simultaneous conditions with Licensed Bands Antenna 3a/3b active and 2.4 GHz WLAN and WPT active
- Simultaneous conditions with conditions with Inter-Band ULCA active and WPT active

Mode / Band		Modulated Average (ePA) Single Tx Chain (dBm) Antenna 5T	Modulated Average (iPA) Single Tx Chain (dBm) Antenna 5T
NB UNII-3 BDR	Maximum	9.50	5.50
	Nominal	8.00	4.00
NB UNII-3 HDR4	Maximum	9.50	0.00
	Nominal	8.00	-1.50
NB UNII-3 HDR8	Maximum	9.50	0.00
	Nominal	8.00	-1.50

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 43 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Mode / Band		Modulated Average (ePA) TXBF (dBm) Antenna 5T	Modulated Average (iPA) TXBF (dBm) Antenna 5T
NB UNII-3 BDR	Maximum	9.50	5.00
	Nominal	8.00	3.50
NB UNII-3 HDR4	Maximum	9.50	-1.50
	Nominal	8.00	-3.00
NB UNII-3 HDR8	Maximum	9.50	-1.50
	Nominal	8.00	-3.00

Note: In TxBF operations, each antenna transmits at maximum allowed powers as indicated above.

Table below is applicable in the following conditions:

- Simultaneous conditions with Licensed Bands Antenna 3a/3b Active and WPT active
- Simultaneous conditions with Licensed Bands Antenna 2/1a/1b/4, 2.4 GHz WLAN and WPT active
- Simultaneous conditions with 2.4 GHz WLAN and wPT active

Mode / Band		Modulated Average (ePA) Single Tx Chain (dBm) Antenna 3b	Modulated Average (iPA) Single Tx Chain (dBm) Antenna 3b
NB UNII-3 BDR	Maximum	7.00	4.50
	Nominal	5.50	3.00
NB UNII-3 HDR4	Maximum	7.00	-1.50
	Nominal	5.50	-3.00
NB UNII-3 HDR8	Maximum	7.00	-1.50
	Nominal	5.50	-3.00

Mode / Band		Modulated Average (ePA) TXBF (dBm) Antenna 3b	Modulated Average (iPA) TXBF (dBm) Antenna 3b
NB UNII-3 BDR	Maximum	7.00	4.00
	Nominal	5.50	2.50
NB UNII-3 HDR4	Maximum	7.00	-2.50
	Nominal	5.50	-4.00
NB UNII-3 HDR8	Maximum	7.00	-2.50
	Nominal	5.50	-4.00

Note: In TxBF operations, each antenna transmits at maximum allowed powers as indicated above.

Table below is applicable in the following conditions:

- Simultaneous conditions with Licensed Bands Antenna 3a/3b Active and WPT active and 2.4 GHz WLAN
- Simultaneous conditions with Inter-Band ULCA active and wPT active

Mode / Band		Modulated Average (ePA) Single Tx Chain (dBm) Antenna 3b	Modulated Average (iPA) Single Tx Chain (dBm) Antenna 3b
NB UNII-3 BDR	Maximum	4.50	4.50
	Nominal	3.00	3.00
NB UNII-3 HDR4	Maximum	4.50	-1.50
	Nominal	3.00	-3.00
NB UNII-3 HDR8	Maximum	4.50	-1.50
	Nominal	3.00	-3.00

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 44 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Mode / Band		Modulated Average (ePA) TXBF (dBm) Antenna 3b	Modulated Average (iPA) TXBF (dBm) Antenna 3b
NB UNII-3 BDR	Maximum	4.50	4.00
	Nominal	3.00	2.50
NB UNII-3 HDR4	Maximum	4.50	-2.50
	Nominal	3.00	-4.00
NB UNII-3 HDR8	Maximum	4.50	-2.50
	Nominal	3.00	-4.00

Note: In TxBF operations, each antenna transmits at maximum allowed powers as indicated above.

Table below is applicable in the following conditions:

- Simultaneous conditions with Licensed Bands Antenna 1a/1b Active and wPT active
- Simultaneous conditions with Licensed Bands Antenna 2/3a/3b/4, 2.4 GHz WLAN and wPT active
- Simultaneous conditions with 2.4 GHz WLAN and wPT active

Mode / Band		Modulated Average (ePA) Single Tx Chain (dBm) Antenna 1b	Modulated Average (iPA) Single Tx Chain (dBm) Antenna 1b
NB UNII-3 BDR	Maximum	6.50	3.00
	Nominal	5.00	1.50
NB UNII-3 HDR4	Maximum	6.50	-3.00
	Nominal	5.00	-4.50
NB UNII-3 HDR8	Maximum	6.50	-3.00
	Nominal	5.00	-4.50

Table below is applicable in the following conditions:

- Simultaneous conditions with Licensed Bands Antenna 1a/1b Active and WPT active and 2.4 GHz WLAN
- Simultaneous conditions with Inter-Band ULCA active and wPT active

Mode / Band		Modulated Average (ePA) Single Tx Chain (dBm) Antenna 1b	Modulated Average (iPA) Single Tx Chain (dBm) Antenna 1b
NB UNII-3 BDR	Maximum	4.00	3.00
	Nominal	2.50	1.50
NB UNII-3 HDR4	Maximum	4.00	-3.00
	Nominal	2.50	-4.50
NB UNII-3 HDR8	Maximum	4.00	-3.00
	Nominal	2.50	-4.50

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 45 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

1.5 DUT Antenna Locations

The overall diagonal dimension of the device is > 200 mm. A diagram showing the location of the device antennas can be found in DUT Antenna Diagram & SAR Test Setup Photographs Appendix. Exact antenna dimensions and separation distances are shown in the Technical Descriptions in the FCC filings.

Note: Per FCC KDB Publication 616217 D04v01r01, front side of the device is not required to be evaluated for SAR. All other edges were evaluated for simultaneous transmission analysis.

1.6 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D04v01, transmitters are considered to be operating simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds.

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D04v01 4.3.2 procedures.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 46 of 255

REV 25.0
10/16/2024

Table 1-6
Simultaneous Transmission Scenarios

No.	Capable Transmit Configuration	Body
1	2.4 GHz WI-FI MIMO + WPT	Yes
2	5/6 GHz WI-FI MIMO + WPT	Yes
3	2.4 GHz Bluetooth (TXBF) + WPT	Yes
4	NB UNII (TXBF) + WPT	Yes
5	Cellular Band + 2.4 GHz WI-FI + WPT	Yes
6	Cellular Band + 5/6 GHz WI-FI + WPT	Yes
7	Cellular Band + 2.4 GHz Bluetooth + WPT	Yes
8	Cellular Band + 802.15.4 + WPT	Yes
9	Cellular Band + 2.4 GHz WI-FI MIMO + WPT	Yes
10	Cellular Band + 5/6 GHz WI-FI MIMO + WPT	Yes
11	Cellular Band + 2.4 GHz Bluetooth + 5/6 GHz WI-FI + WPT	Yes
12	Cellular Band + 802.15.4 + 5/6 GHz WI-FI + WPT	Yes
13	Cellular Band + 2.4 GHz Bluetooth + 5/6 GHz WI-FI MIMO + WPT	Yes
14	Cellular Band + 802.15.4 + 5/6 GHz WI-FI MIMO + WPT	Yes
15	2.4 GHz Bluetooth + 5 GHz WI-FI + WPT	Yes
16	802.15.4 + 5 GHz WI-FI + WPT	Yes
17	2.4 GHz Bluetooth + 5/6 GHz WI-FI MIMO + WPT	Yes
18	802.15.4 + 5/6 GHz WI-FI MIMO + WPT	Yes
19	Cellular Band + 2.4 GHz Bluetooth (TXBF) + 5/6 GHz WI-FI + WPT	Yes
20	Cellular Band + 2.4 GHz Bluetooth (TXBF) + 5/6 GHz WI-FI MIMO + WPT	Yes
21	2.4 GHz Bluetooth (TXBF) + 5/6 GHz WI-FI + WPT	Yes
22	2.4 GHz Bluetooth (TXBF) + 5/6 GHz WI-FI MIMO + WPT	Yes
23	Cellular Band + NB UNII + WPT	Yes
24	Cellular Band + NB UNII+ 2.4 GHz WI-FI + WPT	Yes
25	Cellular Band + NB UNII+ 2.4 GHz WI-FI MIMO + WPT	Yes
26	NB UNII + 2.4 GHz WI-FI + WPT	Yes
27	NB UNII + 2.4 GHz WI-FI MIMO + WPT	Yes
28	Cellular Band + NB UNII (TXBF) + 2.4 GHz WI-FI + WPT	Yes
29	Cellular Band + NB UNII (TXBF) + 2.4 GHz WI-FI MIMO + WPT	Yes
30	Cellular Band + NB UNII (TXBF) + WPT	Yes
31	Cellular Band + 2.4 GHz Bluetooth (TXBF) + WPT	Yes
32	2.4 GHz WI-FI Antenna 3a + 2.4 GHz Bluetooth Antenna 1a + WPT	Yes
33	2.4 GHz WI-FI Antenna 3a + 802.15.4 Antenna 1a + WPT	Yes
34	Cellular Band + 2.4 GHz WI-FI Antenna 3a + 2.4 GHz Bluetooth Antenna 1a + WPT	Yes
35	Cellular Band + 2.4 GHz WI-FI Antenna 3a + 802.15.4 Antenna 1a + WPT	Yes

Table 1-7
Simultaneous Transmission Scenarios of Inter-Band ULCA

No.	Capable Transmit Configuration	Body	Notes
1	Cellular Ant 2 LB + Cellular Ant 1b MB/HB	Yes	LTE Bands transmitting from Ant 2 LB: LTE B5/12/13/14 LTE Bands transmitting from Ant 1b MB/HB: LTE B2/4/7/30/66
2	Cellular Ant 2 LB + Cellular Ant 3b MB/HB	Yes	LTE Bands transmitting from Ant 2 LB: LTE B5/12/13/14 LTE Bands transmitting from Ant 3b MB/HB: LTE B2/4/7/30/66
3	Cellular Ant 2 LB + Cellular Ant 4 MB/HB	Yes	LTE Bands transmitting from Ant 2 LB: LTE B5/12/13/14 LTE Bands transmitting from Ant 4 MB/HB: LTE B2/4/7/30/66
4	Cellular Ant 4 LB + Cellular Ant 1b MB/HB	Yes	LTE Bands transmitting from Ant 4 LB: LTE B5/12/13/14 LTE Bands transmitting from Ant 1b MB/HB: LTE B2/4/7/30/66
5	Cellular Ant 4 LB + Cellular Ant 2 MB/HB	Yes	LTE Bands transmitting from Ant 4 LB: LTE B5/12/13/14 LTE Bands transmitting from Ant 2 MB/HB: LTE B2/4/7/30/66
6	Cellular Ant 4 LB + Cellular Ant 3b MB/HB	Yes	LTE Bands transmitting from Ant 4 LB: LTE B5/12/13/14 LTE Bands transmitting from Ant 3b MB/HB: LTE B2/4/7/30/66

Note: The technical description includes all the possible Inter-band ULCA combinations.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 47 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 1-8
Simultaneous Transmission Scenarios with Inter-Band ULCA Active

No.	Capable Transmit Configuration	Body
1	LTE Inter-Band ULCA + 2.4 GHz Wi-Fi + WPT	Yes
2	LTE Inter-Band ULCA + 5/6 GHz Wi-Fi + WPT	Yes
3	LTE Inter-Band ULCA + 2.4 GHz Bluetooth + WPT	Yes
4	LTE Inter-Band ULCA + 802.15.4 + WPT	Yes
5	LTE Inter-Band ULCA + 2.4 GHz Wi-Fi MIMO + WPT	Yes
6	LTE Inter-Band ULCA + 5/6 GHz Wi-Fi MIMO + WPT	Yes
7	LTE Inter-Band ULCA + 2.4 GHz Bluetooth + 5/6 GHz Wi-Fi + WPT	Yes
8	LTE Inter-Band ULCA + 802.15.4 + 5/6 GHz Wi-Fi + WPT	Yes
9	LTE Inter-Band ULCA + 2.4 GHz Bluetooth + 5/6 GHz Wi-Fi MIMO + WPT	Yes
10	LTE Inter-Band ULCA + 802.15.4 + 5/6 GHz Wi-Fi MIMO + WPT	Yes
11	LTE Inter-Band ULCA + 2.4 GHz Bluetooth (TXBF) + 5/6 GHz Wi-Fi + WPT	Yes
12	LTE Inter-Band ULCA + 2.4 GHz Bluetooth (TXBF) + 5/6 GHz Wi-Fi MIMO + WPT	Yes
13	LTE Inter-Band ULCA + NB UNII + WPT	Yes
14	LTE Inter-Band ULCA + NB UNII+ 2.4 GHz Wi-Fi + WPT	Yes
15	LTE Inter-Band ULCA + NB UNII+ 2.4 GHz Wi-Fi MIMO + WPT	Yes
16	LTE Inter-Band ULCA + NB UNII (TXBF) + 2.4 GHz Wi-Fi + WPT	Yes
17	LTE Inter-Band ULCA + NB UNII (TXBF) + 2.4 GHz Wi-Fi MIMO + WPT	Yes
18	LTE Inter-Band ULCA + NB UNII (TXBF) + WPT	Yes
19	LTE Inter-Band ULCA + 2.4 GHz Bluetooth (TXBF) + WPT	Yes
20	LTE Inter-Band ULCA + 2.4 GHz Wi-Fi Antenna 3a + 2.4 GHz Bluetooth Antenna 1a + WPT	Yes
21	LTE Inter-Band ULCA + 2.4 GHz Wi-Fi Antenna 3a + 802.15.4 Antenna 1a + WPT	Yes

Note: LTE inter-band ULCA can operate in any of the combinations in Table 1-7

- There are no limitations in the above listed simultaneous transmission scenarios between cellular antennas and BT/Wi-Fi antennas.
- 2.4GHz WIFI and 2.4 GHz Bluetooth/802.15.4 can transmit simultaneously on separate antennas. Specific 2.4 GHz WIFI Antenna that can only transmit simultaneously with 2.4 GHz Bluetooth/802.15.4 is listed in the above table. In this scenario, Wi-Fi max power will not exceed minimum of (13.5 dBm, SAR max cap, Reg max cap) power. Additionally, in disconnected mode, BT will be using iPA only.
- Specific NB UNII TXBF Antennas that can only transmit simultaneously are listed in the Simultaneous Transmission Backoff Scenarios document.
- 2.4 GHz WLAN and 5 GHz WLAN cannot transmit simultaneously.
- This device supports 2x2 MIMO Tx for WLAN 802.11a/g/n/ac/ax. 802.11a/g/n/ac/ax supports CDD and 802.11n/ac/ax additionally supports SDM. Each WLAN antenna can transmit independently or together when operating with MIMO.
- EN-DC operation is supported with LTE + 5G NR FR1 scenarios. The LTE anchor bands are shown in the NR FR1 checklist.
- This device supports VoWIFI

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 48 of 255

REV 25.0
10/16/2024

1.7 Miscellaneous SAR Test Considerations

(A) WIFI/BT

Based on the maximum allowed power for the respective antennas, U-NII-2A was evaluated for Antenna 1b, Antenna 5T, and Antenna 3b. Additional testing for U-NII-1 Antenna 1b, Antenna 5T, and Antenna 3b SAR was not required since U-NII-1 and U-NII-2A bands have the same maximum output power and all reported SAR was less than 1.2 W/kg per FCC KDB Publication 248227 D01v02r02.

The WLAN/Bluetooth/802.15.4/NB UNII chipset in this device is produced by two different suppliers. The electrically identical modules are manufactured with identical mechanical structures to meet the same specifications and functions. Two device variants are referenced as Variant 1 and Variant 2 in this report. WLAN/Bluetooth/802.15.4/NB UNII SAR worst case configuration was spotchecked on Variant 1 and Variant 2. The Variant with the highest reported SAR value was evaluated for the remaining WLAN/Bluetooth/802.15.4/NB UNII configurations.

This device supports channel 1-13 for 2.4 GHz WLAN. However, because channel 12/13 targets are not higher than that of channels 1-11, channels 1, 6, and 11 were considered for SAR testing per FCC KDB 248227 D01V02r02.

This device supports IEEE 802.11ac with the following features:

- a) Up to 160 MHz Bandwidth only for 5/6 GHz
- b) 3 Tx antenna output
- c) 256 QAM is supported
- d) TDWR and Band gap channels are supported

This device supports IEEE 802.11ax with the following features:

- a) Up to 160 MHz Bandwidth only for 5/6 GHz
- b) Up to 20 MHz Bandwidth only for 2.4 GHz
- c) No aggregate channel configurations
- d) 3 Tx antenna output
- e) Up to 1024 QAM is supported
- f) TDWR and Band gap channels are supported for 5 GHz
- g) MU-MIMO UL Operations are not supported

Per April 2019 TCB Workshop Notes, SAR testing was not required for 802.11ax when applying the initial test configuration procedures of KDB 248227, with 802.11ax considered a higher order 802.11 mode.

Per FCC guidance, SAR was performed using 6.5 GHz SAR probe calibration factors. FCC KDB 648474 and FCC KDB 248227 were followed for test positions, distances, and modes. Per TCB workshop October 2020 notes, 5 channels were tested. Absorbed power density (APD) using a 4cm² averaging area is reported based on SAR measurements. Incident power density is evaluated at 2mm ensuring that the resolution is sufficient such that integrated power density (iPD) between d=2mm and d=λ/5mm is ≥ -1dB per equipment manufacturer guidance. Power density results are scaled up for uncertainty above 30%.

(B) Licensed Transmitter(s)

This device is only capable of QPSK HSUPA in the uplink. Therefore, no additional SAR tests are required beyond that described for devices with HSUPA in KDB 941225 D01v03r01.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 49 of 255

REV 25.0
10/16/2024

NR implementation supports SA and NSA mode. In EN-DC mode, NR operates with the LTE Bands shown in the NR FR1 checklist acting as anchor bands. Per FCC guidance, SAR tests for NR Bands and LTE Anchors Bands were performed separately due to limitations in SAR probe calibration factors.

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth; and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02r04.

This device supports LTE Carrier Aggregation (CA) in the downlink. All uplink communications are identical to Release 8 specifications. Per FCC KDB Publication 941225 D05A v01r02, SAR for LTE CA operations was not needed since the maximum average output power in LTE CA mode was not >0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive. The downlink carrier aggregation exclusion analysis can be found in LTE DLCA RF Conducted Powers Appendix.

This device supports downlink 4x4 MIMO operations for some LTE Bands. Per May 2017 TCB Workshop Notes, SAR for 4x4 DL MIMO was not needed since the maximum average output power in 4x4 DL MIMO mode was not more than 0.25 dB higher than the maximum output power with 4x4 DL MIMO inactive. Additionally, SAR for 4x4 MIMO Downlink Carrier Aggregation was not needed since the maximum average output power in 4x4 MIMO Downlink Carrier Aggregation mode was not more than 0.25 dB higher than the maximum output power with 4x4 MIMO Downlink and downlink carrier aggregation inactive.

This device supports LTE/NR capabilities with overlapping transmission frequency ranges. When the supported frequency range of an LTE/NR Band falls completely within an LTE/NR band with a larger transmission frequency range, both LTE/NR bands have the same target power (or the band with the larger transmission frequency range has a higher target power), and both LTE/NR bands share the same transmission path and signal characteristics, SAR was only assessed for the band with the larger transmission frequency range.

This device supports both Power Class 2 (PC2) and Power Class 3 (PC3) for LTE Band 41 and NR Band n41/77. Per May 2017 TCB Workshop Notes, SAR tests were performed with Power Class 3 (given the specific UL/DL limitations for Power Class 2). Additionally, SAR testing for the power class 2 condition was evaluated for the highest configuration in Power Class 3 for each test configuration to confirm the results were scalable linearly (See Section 13).

This device supports LTE Carrier Aggregation (CA) for LTE Band 41, LTE Band 48, LTE Band 5, LTE Band 66, and LTE Band 7 with two component carriers in the uplink. SAR Measurements and conducted powers were evaluated per 2017 Fall TCB Workshop Notes.

This device supports inter-band LTE Carrier Aggregation (CA) for LTE Bands 2/4/5/30/7/12/13/14/66 with two component carriers in the uplink.

NR implementation supports SA and NSA mode. In EN-DC mode, NR operates with the LTE Bands shown in the NR FR1 checklist acting as anchor bands. Per FCC guidance, SAR tests for NR Bands and LTE Anchors Bands were performed separately due to limitations in SAR probe calibration factors.

1.8 Guidance Applied

- FCC KDB Publication 941225 D01v03r01, D05v02r05, D05Av01r02 (3G/4G)
- FCC KDB Publication 248227 D01v02r02 (SAR Considerations for 802.11 Devices)
- FCC KDB Publication 447498 D04v01 (Interim General SAR Guidance)

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 50 of 255

REV 25.0
10/16/2024

- FCC KDB Publication 865664 D01v01r04, D02v01r02 (SAR Measurements up to 6 GHz)
- FCC KDB Publication 616217 D04v01r02 (Tablet)
- May 2017 TCB Workshop Notes (LTE 4x4 Downlink MIMO, LTE Band 41 Power Class 2/3)
- November 2017, April 2018, October 2018 TCB Workshop Notes (LTE Carrier Aggregation)
- April 2019 TCB Workshop Notes (IEEE 802.11ax)
- October 2018 TCB Workshop Notes (Inter-band Uplink Carrier Aggregation)
- November 2017, October 2018, April 2019, November 2019, October 2020 TCB Workshop Notes (IEEE 802.11ax)
- SPEAG DASY6 System Handbook
- SPEAG DASY6 Application Note (Interim Procedures for Devices Operating at 6-10 GHz) (Nov 2021)
- IEEE 1528-2013
- IEC TR 63170:2018
- IEC 62479:2010

1.9 Device Serial Numbers

Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical, and thermal characteristics and are within operational tolerances expected for production units. The serial numbers used for each test are indicated alongside the results in Section 10.

1.10 Bibliography

Report Type	Report Serial Number
RF Exposure Part 0 Test Report	1C2410210075-01.BCG
RF Exposure Part 2 Test Report	1C2410210075-03.BCG
RF Exposure Compliance Summary Report	1C2410210075-04.BCG

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 51 of 255

REV 25.0
10/16/2024

2 LTE AND NR INFORMATION

LTE Information				
Form Factor	Tablet			
Frequency Range of each LTE transmission	LTE Band 71 (665.5 - 695.5 MHz)			
	LTE Band 12 (699.7 - 715.3 MHz)			
	LTE Band 17 (706.5 - 713.5 MHz)			
	LTE Band 13 (779.5 - 784.5 MHz)			
	LTE Band 14 (793.5 - 795.5 MHz)			
	LTE Band 26 (Cell): 824.7 - 848.3 MHz			
	LTE Band 5 (Cell): 824.7 - 848.3 MHz			
	LTE Band 66 (AWS) (1710.7 - 1779.3 MHz)			
	LTE Band 4 (AWS) (1710.7 - 1754.3 MHz)			
	LTE Band 25 (PCS) (1850.7 - 1914.3 MHz)			
	LTE Band 2 (PCS) (1850.7 - 1909.3 MHz)			
	LTE Band 30 (2307.5 - 2312.5 MHz)			
	LTE Band 7 (2502.5 - 2567.5 MHz)			
	LTE Band 41 (2498.5 - 2687.5 MHz)			
	LTE Band 48 (3552.5 - 3697.5 MHz)			
	LTE Band 71: 5 MHz, 10 MHz, 15 MHz, 20 MHz			
	LTE Band 12: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz			
	LTE Band 17: 5 MHz, 10 MHz			
	LTE Band 13: 5 MHz, 10 MHz			
	LTE Band 14: 5 MHz, 10 MHz			
Channel Bandwidths	LTE Band 26 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz			
	LTE Band 5 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz			
	LTE Band 66 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz			
	LTE Band 4 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz			
	LTE Band 25 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz			
	LTE Band 2 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz			
	LTE Band 30: 5 MHz, 10 MHz			
	LTE Band 7: 5 MHz, 10 MHz, 15 MHz, 20 MHz			
	LTE Band 41: 5 MHz, 10 MHz, 15 MHz, 20 MHz			
	LTE Band 48: 5 MHz, 10 MHz, 15 MHz, 20 MHz			
Channel Numbers and Frequencies (MHz)	Low	Low-Mid	Mid	Mid-High
	High			
LTE Band 71: 5 MHz	665.5 (133147)	680.5 (133297)	695.5 (133447)	
LTE Band 71: 10 MHz	668 (133172)	680.5 (133297)	693 (133422)	
LTE Band 71: 15 MHz	670.5 (133197)	680.5 (133297)	690.5 (133397)	
LTE Band 71: 20 MHz	673 (133222)	680.5 (133297)	688 (133372)	
LTE Band 12: 1.4 MHz	699.7 (23017)	707.5 (23095)	715.3 (23173)	
LTE Band 12: 3 MHz	700.5 (23025)	707.5 (23095)	714.5 (23165)	
LTE Band 12: 5 MHz	701.5 (23035)	707.5 (23095)	713.5 (23155)	
LTE Band 12: 10 MHz	704 (23060)	707.5 (23095)	711 (23130)	
LTE Band 17: 5 MHz	706.5 (23755)	710 (23790)	713.5 (23825)	
LTE Band 17: 10 MHz	709 (23780)	710 (23790)	711 (23800)	
LTE Band 13: 5 MHz	779.5 (23205)	782 (23230)	784.5 (23255)	
LTE Band 13: 10 MHz	N/A	782 (23230)	N/A	
LTE Band 14: 5 MHz	790.5 (23305)	793 (23330)	795.5 (23355)	
LTE Band 14: 10 MHz	N/A	793 (23330)	N/A	
LTE Band 26 (Cell): 1.4 MHz	814.7 (26697)	831.5 (26865)	848.3 (27033)	
LTE Band 26 (Cell): 3 MHz	815.5 (26705)	831.5 (26865)	847.5 (27025)	
LTE Band 26 (Cell): 5 MHz	816.5 (26715)	831.5 (26865)	846.5 (27015)	
LTE Band 26 (Cell): 10 MHz	819 (26740)	831.5 (26865)	844 (26990)	
LTE Band 5 (Cell): 1.4 MHz	824.7 (20407)	836.5 (20525)	848.3 (20643)	
LTE Band 5 (Cell): 3 MHz	825.5 (20415)	836.5 (20525)	847.5 (20635)	
LTE Band 5 (Cell): 5 MHz	826.5 (20425)	836.5 (20525)	846.5 (20625)	
LTE Band 5 (Cell): 10 MHz	829 (20450)	836.5 (20525)	844 (20600)	
LTE Band 66 (AWS): 1.4 MHz	1710.7 (131979)	1745 (132322)	1779.3 (132665)	
LTE Band 66 (AWS): 3 MHz	1711.5 (131987)	1745 (132322)	1778.5 (132657)	
LTE Band 66 (AWS): 5 MHz	1712.5 (131997)	1745 (132322)	1777.5 (132647)	
LTE Band 66 (AWS): 10 MHz	1715 (132022)	1745 (132322)	1775 (132622)	
LTE Band 66 (AWS): 15 MHz	1717.5 (132047)	1745 (132322)	1772.5 (132597)	
LTE Band 66 (AWS): 20 MHz	1720 (132072)	1745 (132322)	1770 (132572)	
LTE Band 4 (AWS): 1.4 MHz	1710.7 (19957)	1732.5 (20175)	1754.3 (20393)	
LTE Band 4 (AWS): 3 MHz	1711.5 (19965)	1732.5 (20175)	1753.5 (20385)	
LTE Band 4 (AWS): 5 MHz	1712.5 (19975)	1732.5 (20175)	1752.5 (20375)	
LTE Band 4 (AWS): 10 MHz	1715 (20000)	1732.5 (20175)	1750 (20350)	
LTE Band 4 (AWS): 15 MHz	1717.5 (20025)	1732.5 (20175)	1747.5 (20325)	
LTE Band 4 (AWS): 20 MHz	1720 (20050)	1732.5 (20175)	1745 (20300)	
LTE Band 25 (PCS): 1.4 MHz	1850.7 (26047)	1882.5 (26365)	1914.3 (26683)	
LTE Band 25 (PCS): 3 MHz	1851.5 (26055)	1882.5 (26365)	1913.5 (26675)	
LTE Band 25 (PCS): 5 MHz	1852.5 (26065)	1882.5 (26365)	1912.5 (26665)	
LTE Band 25 (PCS): 10 MHz	1855 (26090)	1882.5 (26365)	1910 (26640)	
LTE Band 25 (PCS): 15 MHz	1857.5 (26115)	1882.5 (26365)	1907.5 (26615)	
LTE Band 25 (PCS): 20 MHz	1860 (26140)	1882.5 (26365)	1905 (26590)	
LTE Band 2 (PCS): 1.4 MHz	1850.7 (18907)	1880 (18900)	1909.3 (19193)	
LTE Band 2 (PCS): 3 MHz	1851.5 (18915)	1880 (18900)	1908.5 (19185)	
LTE Band 2 (PCS): 5 MHz	1852.5 (18925)	1880 (18900)	1907.5 (19175)	
LTE Band 2 (PCS): 10 MHz	1855 (18950)	1880 (18900)	1905 (19150)	
LTE Band 2 (PCS): 15 MHz	1857.5 (18975)	1880 (18900)	1902.5 (19125)	
LTE Band 2 (PCS): 20 MHz	1860 (18700)	1880 (18900)	1900 (19100)	
LTE Band 30: 5 MHz	2307.5 (27165)	2310 (27210)	2312.5 (27255)	
LTE Band 30: 10 MHz	N/A	2310 (27210)	N/A	
LTE Band 7: 5 MHz	2502.5 (20775)	2535 (21100)	2567.5 (21425)	
LTE Band 7: 10 MHz	2505 (20800)	2535 (21100)	2565 (21400)	
LTE Band 7: 15 MHz	2507.5 (20825)	2535 (21100)	2562.5 (21375)	
LTE Band 7: 20 MHz	2510 (20850)	2535 (21100)	2560 (21350)	
LTE Band 41: 5 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)
LTE Band 41: 10 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)
LTE Band 41: 15 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)
LTE Band 41: 20 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)
LTE Band 48: 5 MHz	3552.5 (55265)	3600.8 (55748)	N/A	3649.2 (56232)
LTE Band 48: 10 MHz	3555 (55290)	3601.7 (55757)	N/A	3648.3 (56223)
LTE Band 48: 15 MHz	3557.5 (55315)	3602.5 (55765)	N/A	3647.5 (56215)
LTE Band 48: 20 MHz	3560 (55340)	3603.3 (55773)	N/A	3646.7 (56207)
UE Category	DL UE Cat 20, UL UE Cat 18			
Modulations Supported in UL	QPSK, 16QAM, 64QAM, 256QAM			
LTE MPR Permanently implemented per 3GPP TS 36.101, section 6.2.3-6.2.5? (manufacturer attestation to be provided)	YES			
A-MPR (Additional MPR) disabled for SAR	YES			
LTE Carrier Aggregation Possible	The technical description includes all the possible carrier aggregation combinations			
LTE Additional Information	This device does not support full CA features on 3GPP Release 16. It supports carrier aggregation, downlink MIMO, LAA features as shown in the RF Conducted Powers section of this report and the Downlink LTE CA RF Conductive Powers Appendix. All uplink communications are identical to the Release 8 Specifications. The following LTE Release 15 Features are not supported: Carrier Aggregation, Relay, HetNet, Enhanced MIMO, eCIC, WiFi Offloading, eMBMS, Cross-Carrier Scheduling, Enhanced SC-FDMA.			

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 52 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 53 of 255

3 INTRODUCTION

The FCC and Innovation, Science, and Economic Development Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996, and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [22]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields,” Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

3.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 3-1).

Equation 3-1
SAR Mathematical Equation

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m³)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 54 of 255

REV 25.0
10/16/2024

4 DOSIMETRIC ASSESSMENT

4.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface, and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
 - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.




Figure 4-1
Sample SAR Area
Scan

Table 4-1
Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04*

Frequency	Maximum Area Scan Resolution (mm) ($\Delta x_{\text{area}}, \Delta y_{\text{area}}$)	Maximum Zoom Scan Resolution (mm) ($\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}}$)	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x,y,z)
			Uniform Grid	Graded Grid		
				$\Delta z_{\text{zoom}}(n)$	$\Delta z_{\text{zoom}}(1)^*$	
≤ 2 GHz	≤ 15	≤ 8	≤ 5	≤ 4	$\leq 1.5^* \Delta z_{\text{zoom}}(n-1)$	≥ 30
2-3 GHz	≤ 12	≤ 5	≤ 5	≤ 4	$\leq 1.5^* \Delta z_{\text{zoom}}(n-1)$	≥ 30
3-4 GHz	≤ 12	≤ 5	≤ 4	≤ 3	$\leq 1.5^* \Delta z_{\text{zoom}}(n-1)$	≥ 28
4-5 GHz	≤ 10	≤ 4	≤ 3	≤ 2.5	$\leq 1.5^* \Delta z_{\text{zoom}}(n-1)$	≥ 25
5-6 GHz	≤ 10	≤ 4	≤ 2	≤ 2	$\leq 1.5^* \Delta z_{\text{zoom}}(n-1)$	≥ 22

*Also compliant to IEEE 1528-2013 Table 6

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 55 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

5 TEST CONFIGURATION POSITIONS

5.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$.

5.2 SAR Testing for Tablet per KDB Publication 616217 D04v01r02

Per FCC KDB Publication 616217 D04v01r02, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. The SAR Exclusion Threshold in KDB 447498 D04v01 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 56 of 255

REV 25.0
10/16/2024

6 RF EXPOSURE LIMITS

6.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

6.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

6.3 RF Exposure Limits for Frequencies below 6 GHz

Table 6-1
SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
Peak Spatial Average SAR Head	1.6	8.0
Whole Body SAR	0.08	0.4
Peak Spatial Average SAR Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 57 of 255

REV 25.0
10/16/2024

6.4 RF Exposure Limits for Frequencies above 6 GHz

Per §1.1310 (d)(3), the MPE limits are applied for frequencies above 6 GHz. Power Density is expressed in units of W/m² or mW/cm².

Peak Spatially Averaged Power Density was evaluated over a circular area of 4 cm² per interim FCC Guidance for near-field power density evaluations per October 2018 TCB Workshop notes.

Table 6-2
Human Exposure Limits Specified in FCC 47 CFR §1.1310

Human Exposure to Radiofrequency (RF) Radiation Limits		
Frequency Range [MHz]	Power Density [mW/cm ²]	Average Time [Minutes]
(A) Limits For Occupational / Controlled Environments		
1,500 – 100,000	5.0	6
(B) Limits For General Population / Uncontrolled Environments		
1,500 – 100,000	1.0	30

Note: 1.0 mW/cm² is 10 W/m²

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 58 of 255

REV 25.0
10/16/2024

7 FCC MEASUREMENT PROCEDURES

Power measurements for licensed transmitters are performed using a base station simulator under digital average power.

7.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D04v01, when SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

7.2 3G SAR Test Reduction Procedure

In FCC KDB Publication 941225 D01v03r01, certain transmission modes within a frequency band and wireless mode evaluated for SAR are defined as primary modes. The equivalent modes considered for SAR test reduction are denoted as secondary modes. When the maximum output power including tune-up tolerance specified for production units in a secondary mode is ≤ 0.25 dB higher than the primary mode or when the highest reported SAR of the primary mode, scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode, is ≤ 1.2 W/kg, SAR measurements are not required for the secondary mode. These criteria are referred to as the 3G SAR test reduction procedure. When the 3G SAR test reduction procedure is not satisfied, SAR measurements are additionally required for the secondary mode.

7.3 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.”

The device is placed into a simulated call using a base station simulator in an RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test are evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device is tested throughout the SAR test at maximum output power, the SAR measurement system measures a “point SAR” at an arbitrary reference point at the start and end of the 1-gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviates by more than 5%, the SAR test and drift measurements are repeated.

7.4 SAR Measurement Conditions for UMTS

7.4.1 Output Power Verification

Maximum output power is verified on the High, Middle, and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC with TPC (transmit power control) set to all “1s” or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 59 of 255

REV 25.0
10/16/2024

7.4.2 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all “1s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCH_n configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCH_n, for the highest reported SAR configuration in 12.2 kbps RMC.

7.4.3 SAR Measurements with Rel 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, for the highest reported SAR configuration in 12.2 kbps RMC without HSDPA. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

7.4.4 SAR Measurements with Rel 6 HSUPA

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA.

7.4.5 SAR Measurement Conditions for DC-HSDPA

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

7.5 SAR Measurement Conditions for LTE

LTE modes are tested according to FCC KDB 941225 D05v02r04 publication. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 or Anritsu MT8820C simulators are used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

7.5.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

7.5.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 60 of 255

REV 25.0
10/16/2024

7.5.3 A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

7.5.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r04:

- a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth.
 - i. The required channel and offset combination with the highest maximum output power is required for SAR.
 - ii. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
 - iii. When the reported SAR for a required test channel is > 1.45 W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg.
- d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to $\frac{1}{2}$ dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is < 1.45 W/kg.

7.5.5 TDD

LTE TDD testing is performed using the SAR test guidance provided in FCC KDB 941225 D05v02r04. TDD is tested at the highest duty factor using UL-DL configuration 0 with special subframe configuration 6 and applying the FDD LTE procedures in KDB 941225 D05v02r04. SAR testing is performed using the extended cyclic prefix listed in 3GPP TS 36.211 Section 4.

7.5.6 Downlink Only Carrier Aggregation

Conducted power measurements with LTE Carrier Aggregation (CA) (downlink only) active are made in accordance with KDB Publication 941225 D05Av01r02. The RRC connection is only handled by one cell, the primary component carrier (PCC) for downlink and uplink communications. After making a data connection to the PCC, the UE device adds secondary component carrier(s) (SCC) on the downlink only. All uplink communications and acknowledgements remain identical to specifications when downlink carrier aggregation is inactive on the PCC. Additional conducted output powers are measured with the downlink carrier aggregation active for the configuration with highest measured maximum conducted power with downlink carrier aggregation inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band. Per FCC KDB Publication 941225 D05Av01r02, no SAR measurements are required for downlink only carrier aggregation configurations when the average output power with downlink only carrier aggregation active is not more than 0.25 dB higher than the average output power with downlink only carrier aggregation inactive.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 61 of 255

REV 25.0
10/16/2024

7.6 SAR Testing with 802.11 Transmitters

The normal network operating configurations of 802.11 transmitters are not suitable for SAR measurements. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset-based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01v02r02 for more details.

7.6.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters.

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

7.6.2 U-NII-1 and U-NII-2A

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is > 1.2 W/kg. When different maximum output powers are specified for the bands, SAR measurement for the U-NII band with the lower maximum output power is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is > 1.2 W/kg. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

7.6.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification. Unless band gap channels are permanently disabled, SAR must be considered for these channels. Each band is tested independently according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

7.6.4 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 62 of 255

REV 25.0
10/16/2024

- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that position using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel, i.e., all channels require testing.

2.4 GHz 802.11 g/n/ax OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

7.6.5 OFDM Transmission Mode and SAR Test Channel Selection

When the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. Per April 2019 TCB Workshop guidance, 802.11ax was considered the highest order 802.11 mode. When the maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

7.6.6 Initial Test Configuration Procedure

For OFDM, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order IEEE 802.11 mode. The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements (See Section 7.6.5). When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

7.6.7 Subsequent Test Configuration Procedures

For OFDM configurations in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is ≤ 1.2 W/kg, no additional SAR tests for the subsequent test configurations are required. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 63 of 255

REV 25.0
10/16/2024

7.6.8 MIMO SAR considerations

Per KDB Publication 248227 D01v02r02, the simultaneous SAR provisions in KDB Publication 447498 D04v01 should be applied to determine simultaneous transmission SAR test exclusion for WIFI MIMO. If the sum of 1g single transmission chain SAR measurements is <1.6 W/kg, no additional SAR measurements for MIMO are required. Alternatively, SAR for MIMO can be measured with all antennas transmitting simultaneously at the specified maximum output power of MIMO operation. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 64 of 255

REV 25.0
10/16/2024

8 RF CONDUCTED POWERS

All conducted power measurements for 3G/4G/5G Sub6 WWAN technologies and bands in this section were performed while the EUT transmits continuously at minimum (P_{limit}, maximum tune up output power P_{max}).

8.1 UMTS P_{limit} Conducted Powers

Table 8-1
Measured P_{Limit} Antenna 1b

3GPP Release Version	Mode	3GPP 34.121 Subtest	AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			1312	1412	1513	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	12.22	12.14	12.18	12.11	12.13	12.26	-
6	HSDPA	Subtest 1	11.58	11.49	11.57	11.21	11.20	11.30	0
6		Subtest 2	11.59	11.50	11.56	11.19	11.21	11.30	0
6		Subtest 3	11.11	11.02	11.04	10.70	10.72	10.81	0.5
6		Subtest 4	11.10	11.01	11.08	10.71	10.71	10.80	0.5
6	HSUPA	Subtest 1	11.58	11.49	11.56	11.19	11.17	11.28	0
6		Subtest 2	9.56	9.47	9.56	9.18	9.18	9.28	2
6		Subtest 3	10.57	10.48	10.55	10.16	10.17	10.27	1
6		Subtest 4	9.58	9.48	9.56	9.19	9.20	9.31	2
6		Subtest 5	11.60	11.49	11.57	11.20	11.19	11.31	0
8	DC-HSDPA	Subtest 1	11.57	11.49	11.54	11.17	11.16	11.26	0
8		Subtest 2	11.56	11.49	11.53	11.18	11.15	11.27	0
8		Subtest 3	10.97	10.98	11.06	10.64	10.67	10.75	0.5
8		Subtest 4	10.96	10.97	11.05	10.65	10.66	10.76	0.5

Table 8-2
Measured P_{Limit} Antenna 2

Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
		4132	4183	4233	1312	1412	1513	9262	9400	9538	
WCDMA	12.2 kbps RMC	18.95	19.14	19.12	14.82	14.77	14.81	15.18	15.10	15.12	-
HSDPA	Subtest 1	18.96	19.18	19.21	14.77	14.65	14.55	14.96	14.86	14.85	0
	Subtest 2	18.94	19.20	19.22	14.76	14.66	14.56	14.97	14.85	14.84	0
	Subtest 3	18.45	18.69	18.70	14.26	14.16	14.13	14.48	14.37	14.36	0.5
	Subtest 4	18.44	18.71	18.69	14.28	14.18	14.11	14.49	14.36	14.33	0.5
HSUPA	Subtest 1	18.94	19.23	19.20	14.76	14.68	14.57	14.98	14.88	14.87	0
	Subtest 2	16.97	17.22	17.21	12.73	12.67	12.58	12.96	12.87	12.85	2
	Subtest 3	17.96	18.22	18.22	13.74	13.69	13.58	13.97	13.87	13.84	1
	Subtest 4	16.95	17.20	17.24	12.76	12.68	12.54	12.97	12.86	12.85	2
	Subtest 5	18.95	19.24	19.22	14.76	14.69	14.56	14.96	14.88	14.86	0
DC-HSDPA	Subtest 1	18.87	19.12	19.16	14.61	14.57	14.41	14.95	14.82	14.78	0
	Subtest 2	18.89	19.13	19.17	14.60	14.58	14.40	14.96	14.83	14.80	0
	Subtest 3	18.38	18.61	18.67	14.11	14.06	13.91	14.46	14.31	14.30	0.5
	Subtest 4	18.37	18.63	18.68	14.12	14.07	13.92	14.47	14.32	14.29	0.5

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 65 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-3
Measured P_{Limit} Antenna 3b

Mode	3GPP 34.121 Subtest	AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
		1312	1412	1513	9262	9400	9538	
WCDMA	12.2 kbps RMC	11.38	11.39	11.45	11.61	11.57	11.52	-
HSDPA	Subtest 1	11.34	11.41	11.38	11.46	11.48	11.41	0
	Subtest 2	11.36	11.42	11.39	11.44	11.47	11.42	0
	Subtest 3	10.85	10.90	10.88	10.95	10.97	10.92	0.5
	Subtest 4	10.84	10.91	10.90	10.94	10.49	10.90	0.5
HSUPA	Subtest 1	11.32	11.38	11.43	11.45	11.48	11.43	0
	Subtest 2	9.61	9.39	9.42	9.46	9.49	9.44	2
	Subtest 3	10.59	10.40	10.42	10.45	10.48	10.41	1
	Subtest 4	9.60	9.41	9.43	9.44	9.46	9.45	2
	Subtest 5	11.61	11.39	11.42	11.46	11.49	11.45	0
DC-HSDPA	Subtest 1	11.32	11.43	11.41	11.46	11.48	11.41	0
	Subtest 2	11.33	11.41	11.39	11.47	11.47	11.42	0
	Subtest 3	10.84	10.92	10.92	10.95	10.98	10.90	0.5
	Subtest 4	10.82	10.93	10.90	10.96	10.99	10.91	0.5

Table 8-4
Measured P_{Limit} Antenna 4

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			4132	4183	4233	1312	1412	1513	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	19.2	19.34	19.36	14.60	14.44	14.65	12.71	12.89	12.87	-
6	HSDPA	Subtest 1	19.19	19.34	19.38	14.54	14.53	14.87	13.51	13.60	13.62	0
6		Subtest 2	19.18	19.34	19.39	14.58	14.57	14.91	13.49	13.60	13.62	0
6		Subtest 3	18.68	18.85	18.90	14.08	14.07	14.42	13.01	13.10	13.13	0.5
6		Subtest 4	18.67	18.84	18.90	14.08	14.06	14.42	13.01	13.09	13.11	0.5
6	HSUPA	Subtest 1	19.18	19.34	19.41	14.58	14.56	14.93	13.49	13.59	13.61	0
6		Subtest 2	17.17	17.34	17.40	12.56	12.54	12.91	11.46	11.57	11.59	2
6		Subtest 3	18.18	18.35	18.41	13.57	13.54	13.92	12.47	12.58	12.61	1
6		Subtest 4	17.19	17.36	17.40	12.56	12.53	12.92	11.48	11.60	11.62	2
6		Subtest 5	19.19	19.34	19.42	14.56	14.55	14.91	13.47	13.58	13.61	0
8	DC-HSDPA	Subtest 1	19.09	18.99	19.08	14.51	14.46	14.81	13.41	13.45	13.48	0
8		Subtest 2	19.11	18.98	19.06	14.50	14.48	14.79	13.40	13.44	13.46	0
8		Subtest 3	18.60	18.54	18.57	14.02	13.97	14.29	12.89	12.95	12.96	0.5
8		Subtest 4	18.61	18.54	18.58	14.01	13.98	14.30	12.90	12.94	12.95	0.5

DC-HSDPA considerations

- 3GPP Specification 34.121-1 Release 8 Ver 8.10.0 was used for DC-HSDPA guidance
- H-Set 12 (QPSK) was confirmed to be used during DC-HSDPA measurements
- The DUT supports UE category 24 for HSDPA



Figure 8-1
Power Measurement Setup

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 66 of 255

REV 25.0
10/16/2024

8.2 LTE Conducted Powers

Notes: Per FCC KDB Publication 941225 D05v02r05, LTE SAR for the lower bandwidths was not required for testing since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg. Lower bandwidth conducted powers for all LTE bands can be found in the LTE and NR Lower Bandwidth RF Conducted Powers Appendix.

Some bands do not support non-overlapping channels. Per FCC Guidance, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 67 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

8.2.1

LTE Band 71

Table 8-5

LTE Band 71 Measured P_{Limit} Antenna 2 - 20 MHz Bandwidth

LTE Band 71 20 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			133297 (680.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	20.71	0	0
	1	50	20.69		0
	1	99	20.73		0
	50	0	20.71	0-1	0
	50	25	20.81		0
	50	50	20.74		0
	100	0	20.70		0
16QAM	1	0	20.70	0-1	0
	1	50	20.75		0
	1	99	20.52		0
	50	0	20.47	0-2	0
	50	25	20.49		0
	50	50	20.39		0
	100	0	20.48		0
64QAM	1	0	20.54	0-2	0
	1	50	20.72		0
	1	99	20.48		0
	50	0	20.41	0-3	0
	50	25	20.44		0
	50	50	20.35		0
	100	0	20.42		0
256QAM	1	0	19.08	0-5	1.6
	1	50	18.99		1.6
	1	99	19.14		1.6
	50	0	18.92		1.6
	50	25	18.96		1.6
	50	50	18.92		1.6
	100	0	18.97		1.6

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 68 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-6
LTE Band 71 Measured P_{Limit} Antenna 4 - 20 MHz Bandwidth

LTE Band 71 20 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			133297 (680.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	20.83	0	0
	1	50	20.89		0
	1	99	20.75		0
	50	0	20.83	0-1	0
	50	25	20.90		0
	50	50	20.85		0
	100	0	20.86		0
16QAM	1	0	20.57	0-1	0
	1	50	20.72		0
	1	99	20.55		0
	50	0	20.47	0-2	0
	50	25	20.44		0
	50	50	20.41		0
	100	0	20.44		0
64QAM	1	0	20.55	0-2	0
	1	50	20.66		0
	1	99	20.48		0
	50	0	20.48	0-3	0
	50	25	20.45		0
	50	50	20.45		0
	100	0	20.46		0
256QAM	1	0	20.11	0-5	0.3
	1	50	20.14		0.3
	1	99	20.12		0.3
	50	0	20.00		0.3
	50	25	19.95		0.3
	50	50	19.95		0.3
	100	0	19.95		0.3

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 69 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

8.2.2

LTE Band 12

Table 8-7

LTE Band 12 Measured P_{Limit} Antenna 2 - 10 MHz Bandwidth

LTE Band 12 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23095 (707.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	19.14	0	0
	1	25	19.09		0
	1	49	19.21		0
	25	0	19.13	0-1	0
	25	12	19.22		0
	25	25	19.23		0
	50	0	19.19		0
16QAM	1	0	19.13	0-1	0
	1	25	19.14		0
	1	49	19.15		0
	25	0	18.96	0-2	0
	25	12	19.03		0
	25	25	19.00		0
	50	0	19.03		0
64QAM	1	0	19.30	0-2	0
	1	25	19.16		0
	1	49	19.22		0
	25	0	18.97	0-3	0
	25	12	19.07		0
	25	25	19.01		0
	50	0	19.01		0
256QAM	1	0	18.96	0-5	0.2
	1	25	19.04		0.2
	1	49	19.04		0.2
	25	0	18.97		0.2
	25	12	19.02		0.2
	25	25	18.97		0.2
	50	0	18.99		0.2

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 70 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-8
LTE Band 12 Measured P_{Limit} Antenna 4 - 10 MHz Bandwidth

LTE Band 12 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23095 (707.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	19.49	0	0
	1	25	19.21		0
	1	49	19.22		0
	25	0	19.29	0-1	0
	25	12	19.27		0
	25	25	19.24		0
	50	0	19.28		0
16QAM	1	0	19.49	0-1	0
	1	25	19.38		0
	1	49	19.44		0
	25	0	19.17	0-2	0
	25	12	19.15		0
	25	25	19.14		0
	50	0	19.15		0
64QAM	1	0	19.50	0-2	0
	1	25	19.38		0
	1	49	19.44		0
	25	0	19.22	0-3	0
	25	12	19.21		0
	25	25	19.15		0
	50	0	19.14		0
256QAM	1	0	19.32	0-5	0
	1	25	19.34		0
	1	49	19.31		0
	25	0	19.19		0
	25	12	19.17		0
	25	25	19.11		0
	50	0	19.16		0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 71 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

8.2.3

LTE Band 13

Table 8-9

LTE Band 13 Measured P_{Limit} Antenna 2 - 10 MHz Bandwidth

LTE Band 13 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23230 (782.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	19.00	0	0
	1	25	19.17		0
	1	49	19.04		0
	25	0	19.18	0-1	0
	25	12	19.19		0
	25	25	19.11		0
	50	0	19.16		0
16QAM	1	0	19.01	0-1	0
	1	25	19.05		0
	1	49	19.04		0
	25	0	19.11	0-2	0
	25	12	19.10		0
	25	25	19.07		0
	50	0	19.05		0
64QAM	1	0	19.10	0-2	0
	1	25	19.18		0
	1	49	19.15		0
	25	0	19.10	0-3	0
	25	12	19.08		0
	25	25	19.01		0
	50	0	19.06		0
256QAM	1	0	18.39	0-5	0.7
	1	25	18.49		0.7
	1	49	18.37		0.7
	25	0	18.28		0.7
	25	12	18.41		0.7
	25	25	18.33		0.7
	50	0	18.49		0.7

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 72 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-10
LTE Band 13 Measured P_{Limit} Antenna 4 - 10 MHz Bandwidth

LTE Band 13 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23230 (782.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	21.02	0	0
	1	25	21.11		0
	1	49	20.91		0
	25	0	21.07	0-1	0
	25	12	21.05		0
	25	25	21.09		0
	50	0	21.04		0
16QAM	1	0	21.26	0-1	0
	1	25	21.27		0
	1	49	21.22		0
	25	0	21.20	0-2	0
	25	12	21.28		0
	25	25	21.25		0
	50	0	21.13		0
64QAM	1	0	21.08	0-2	0
	1	25	21.15		0
	1	49	21.23		0
	25	0	21.16	0-3	0
	25	12	21.22		0
	25	25	21.20		0
	50	0	21.11		0
256QAM	1	0	20.40	0-5	0.6
	1	25	20.63		0.6
	1	49	20.59		0.6
	25	0	20.58		0.6
	25	12	20.58		0.6
	25	25	20.62		0.6
	50	0	20.63		0.6

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 73 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

8.2.4

LTE Band 14

Table 8-11

LTE Band 14 Measured P_{Limit} Antenna 2 - 10 MHz Bandwidth

LTE Band 14 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23330 (793.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	19.43	0	0
	1	25	19.45		0
	1	49	19.42		0
	25	0	19.44	0-1	0
	25	12	19.54		0
	25	25	19.51		0
	50	0	19.42		0
16QAM	1	0	19.31	0-1	0
	1	25	19.22		0
	1	49	19.20		0
	25	0	19.35	0-2	0
	25	12	19.45		0
	25	25	19.40		0
	50	0	19.33		0
64QAM	1	0	19.36	0-2	0
	1	25	19.30		0
	1	49	19.29		0
	25	0	19.39	0-3	0
	25	12	19.46		0
	25	25	19.40		0
	50	0	19.38		0
256QAM	1	0	19.17	0-5	0.7
	1	25	19.18		0.7
	1	49	19.01		0.7
	25	0	19.08		0.7
	25	12	19.14		0.7
	25	25	19.06		0.7
	50	0	19.04		0.7

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 74 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-12
LTE Band 14 Measured P_{Limit} Antenna 4 - 10 MHz Bandwidth

LTE Band 14 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23330 (793.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	20.72	0	0
	1	25	20.75		0
	1	49	20.67		0
	25	0	20.80	0-1	0
	25	12	20.87		0
	25	25	20.86		0
	50	0	20.73		0
16QAM	1	0	20.99	0-1	0
	1	25	20.96		0
	1	49	21.01		0
	25	0	20.71	0-2	0
	25	12	20.77		0
	25	25	20.78		0
	50	0	20.75		0
64QAM	1	0	20.79	0-2	0
	1	25	20.72		0
	1	49	20.76		0
	25	0	20.62	0-3	0
	25	12	20.61		0
	25	25	20.70		0
	50	0	20.77		0
256QAM	1	0	19.99	0-5	1.1
	1	25	19.91		1.1
	1	49	19.82		1.1
	25	0	19.84		1.1
	25	12	19.92		1.1
	25	25	19.88		1.1
	50	0	19.89		1.1

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 75 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

8.2.5

LTE Band 26

Table 8-13

LTE Band 26 (Cell) Measured P_{Limit} Antenna 2 - 10 MHz Bandwidth

LTE Band 26 (Cell) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26740 (819.0 MHz)	26865 (831.5 MHz)	26990 (844.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	19.55	19.30	19.32	0	0
	1	25	19.29	19.27	19.22		0
	1	49	19.27	19.31	19.28		0
	25	0	19.29	19.27	19.20	0-1	0
	25	12	19.48	19.37	19.22		0
	25	25	19.25	19.22	19.28		0
	50	0	19.27	19.37	19.29		0
16QAM	1	0	19.65	19.59	19.32	0-1	0
	1	25	19.49	19.54	19.39		0
	1	49	19.51	19.55	19.40		0
	25	0	19.30	19.27	19.20	0-2	0
	25	12	19.39	19.37	19.21		0
	25	25	19.37	19.34	19.25		0
	50	0	19.35	19.30	19.19		0
64QAM	1	0	19.56	19.68	19.43	0-2	0
	1	25	19.61	19.64	19.37		0
	1	49	19.50	19.64	19.42		0
	25	0	19.26	19.25	19.22	0-3	0
	25	12	19.35	19.35	19.23		0
	25	25	19.34	19.30	19.26		0
	50	0	19.34	19.29	19.15		0
256QAM	1	0	19.20	19.22	19.21	0-5	0
	1	25	19.32	19.34	19.33		0
	1	49	19.29	19.27	19.37		0
	25	0	19.23	19.33	19.19		0
	25	12	19.24	19.15	19.14		0
	25	25	19.13	19.12	19.04		0
	50	0	19.16	19.15	19.06		0

FCC ID: BCGA3269

SAR EVALUATION REPORT

Approved by:
Technical ManagerDUT Type:
Tablet Device

Page 76 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-14
LTE Band 26 (Cell) Measured P_{Limit} Antenna 4 - 10 MHz Bandwidth

LTE Band 26 (Cell) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26740 (819.0 MHz)	26865 (831.5 MHz)	26990 (844.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	19.40	19.32	19.18	0	0
	1	25	19.30	19.31	19.24		0
	1	49	19.24	19.41	19.27		0
	25	0	19.29	19.25	19.13	0-1	0
	25	12	19.38	19.39	19.24		0
	25	25	19.37	19.30	19.19		0
	50	0	19.32	19.26	19.21		0
16QAM	1	0	19.18	19.45	19.14	0-1	0
	1	25	19.20	19.50	19.17		0
	1	49	19.17	19.37	19.14		0
	25	0	19.14	19.12	18.97	0-2	0
	25	12	19.23	19.20	19.05		0
	25	25	19.20	19.14	19.04		0
	50	0	19.17	19.15	18.94		0
64QAM	1	0	19.34	19.46	19.14	0-2	0
	1	25	19.24	19.51	19.13		0
	1	49	19.21	19.45	19.12		0
	25	0	19.13	19.12	18.97	0-3	0
	25	12	19.20	19.20	19.06		0
	25	25	19.19	19.18	19.01		0
	50	0	19.18	19.14	18.95		0
256QAM	1	0	19.28	19.42	19.28	0-5	0
	1	25	19.30	19.44	19.23		0
	1	49	19.15	19.46	19.16		0
	25	0	19.10	19.10	18.97		0
	25	12	19.22	19.21	19.08		0
	25	25	19.18	19.17	19.03		0
	50	0	19.18	19.16	18.96		0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 77 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

8.2.6

LTE Band 5

Table 8-15

LTE Band 5 (Cell) Measured P_{Limit} Antenna 2 - 10 MHz Bandwidth

LTE Band 5 (Cell) 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20525 (836.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	18.96	0	0
	1	25	19.15		0
	1	49	19.21		0
	25	0	19.00	0-1	0
	25	12	19.11		0
	25	25	19.07		0
	50	0	19.08		0
16QAM	1	0	19.24	0-1	0
	1	25	19.31		0
	1	49	19.27		0
	25	0	19.14	0-2	0
	25	12	19.29		0
	25	25	19.24		0
	50	0	19.24		0
64QAM	1	0	19.30	0-2	0
	1	25	19.27		0
	1	49	19.29		0
	25	0	19.19	0-3	0
	25	12	19.27		0
	25	25	19.27		0
	50	0	19.23		0
256QAM	1	0	18.77	0-5	0.2
	1	25	18.93		0.2
	1	49	18.97		0.2
	25	0	18.87		0.2
	25	12	18.91		0.2
	25	25	18.96		0.2
	50	0	18.81		0.2

Table 8-16

LTE Band 5 (Cell) Antenna 2 Uplink Carrier Aggregation Measured P_{Limit}

	PCC									SCC								Power		
Combination	PCC Band	PCC Bandwidth [MHz]	PCC UL Channel	PCC UL Frequency [MHz]	PCC DL Channel	PCC DL Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC UL Channel	SCC UL Frequency [MHz]	SCC DL Channel	SCC DL Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA 5B	LTE B5	10	20525	836.5	2525	881.5	QPSK	1	49	LTE B5	5	20597	843.7	2597	888.7	QPSK	1	0	19.17	19.21

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 78 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-17
LTE Band 5 (Cell) Measured P_{Limit} Antenna 4 - 10 MHz Bandwidth

LTE Band 5 (Cell) 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20525 (836.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	19.28	0	0
	1	25	19.33		0
	1	49	19.27		0
	25	0	19.34	0-1	0
	25	12	19.37		0
	25	25	19.39		0
	50	0	19.32		0
16QAM	1	0	19.32	0-1	0
	1	25	19.40		0
	1	49	19.31		0
	25	0	19.34	0-2	0
	25	12	19.35		0
	25	25	19.39		0
	50	0	19.32		0
64QAM	1	0	19.31	0-2	0
	1	25	19.41		0
	1	49	19.31		0
	25	0	19.35	0-3	0
	25	12	19.39		0
	25	25	19.37		0
	50	0	19.33		0
256QAM	1	0	19.33	0-5	0
	1	25	19.43		0
	1	49	19.42		0
	25	0	19.34		0
	25	12	19.35		0
	25	25	19.38		0
	50	0	19.33		0

Table 8-18
LTE Band 5 (Cell) Antenna 4 Uplink Carrier Aggregation Measured P_{Limit}

Combination	PCC Band	PCC Bandwidth [MHz]	PCC UL Channel	PCC UL Frequency [MHz]	PCC				SCC				Power							
					PCC DL Channel	PCC DL Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC UL Channel	SCC UL Frequency [MHz]	SCC DL Channel	SCC DL Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA 5B	LTE B5	10	20525	836.5	2525	881.5	QPSK	1	0	LTE B5	5	20453	829.3	2453	874.3	QPSK	1	24	19.15	19.28

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 79 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

8.2.7

LTE Band 66

Table 8-19

LTE Band 66 (AWS) Measured P_{Limit} Antenna 1b - 20 MHz Bandwidth

LTE Band 66 (AWS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132072 (1720.0 MHz)	132322 (1745.0 MHz)	132572 (1770.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	12.36	12.37	12.31	0	0
	1	50	12.29	12.33	12.34		0
	1	99	12.33	12.31	12.28		0
	50	0	12.33	12.28	12.36	0-1	0
	50	25	12.35	12.39	12.33		0
	50	50	12.29	12.23	12.38		0
	100	0	12.33	12.34	12.32		0
16QAM	1	0	12.15	12.20	12.03	0-1	0
	1	50	12.21	12.28	12.21		0
	1	99	11.98	12.16	12.01		0
	50	0	12.04	11.98	12.03	0-2	0
	50	25	12.13	12.01	12.16		0
	50	50	12.08	11.94	12.14		0
	100	0	12.09	11.99	12.03		0
64QAM	1	0	12.36	12.18	12.21	0-2	0
	1	50	12.42	12.22	12.32		0
	1	99	12.29	12.14	12.22		0
	50	0	12.06	11.99	12.00	0-3	0
	50	25	12.16	12.02	12.11		0
	50	50	12.08	11.96	12.07		0
	100	0	12.09	11.97	12.00		0
256QAM	1	0	12.01	12.24	12.19	0-5	0
	1	50	12.12	12.28	12.26		0
	1	99	12.06	12.26	12.22		0
	50	0	11.96	12.02	12.03		0
	50	25	12.05	12.11	12.12		0
	50	50	12.02	12.06	12.08		0
	100	0	12.00	12.00	12.00		0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 80 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-20
LTE Band 66 (AWS) Measured P_{Limit} Antenna 2 - 20 MHz Bandwidth

LTE Band 66 (AWS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132072 (1720.0 MHz)	132322 (1745.0 MHz)	132572 (1770.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.76	14.79	14.46	0	0
	1	50	14.68	14.69	14.39		0
	1	99	14.72	14.74	14.36		0
	50	0	14.79	14.76	14.59	0-1	0
	50	25	14.76	14.87	14.66		0
	50	50	14.73	14.72	14.57		0
	100	0	14.74	14.75	14.64		0
16QAM	1	0	14.78	14.69	14.55	0-1	0
	1	50	14.77	14.78	14.60		0
	1	99	14.72	14.56	14.33		0
	50	0	14.46	14.44	14.29	0-2	0
	50	25	14.60	14.51	14.36		0
	50	50	14.52	14.42	14.34		0
	100	0	14.56	14.47	14.29		0
64QAM	1	0	14.62	14.71	14.49	0-2	0
	1	50	14.75	14.63	14.31		0
	1	99	14.59	14.36	14.39		0
	50	0	14.40	14.42	14.20	0-3	0
	50	25	14.54	14.49	14.31		0
	50	50	14.45	14.41	14.21		0
	100	0	14.46	14.42	14.27		0
256QAM	1	0	14.66	14.70	14.43	0-5	0
	1	50	14.66	14.67	14.43		0
	1	99	14.56	14.46	14.45		0
	50	0	14.36	14.37	14.17		0
	50	25	14.47	14.52	14.28		0
	50	50	14.45	14.41	14.23		0
	100	0	14.40	14.41	14.24		0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 81 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-21
LTE Band 66 (AWS) Measured P_{Limit} Antenna 3b - 20 MHz Bandwidth

LTE Band 66 (AWS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132072 (1720.0 MHz)	132322 (1745.0 MHz)	132572 (1770.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	11.52	11.69	11.33	0	0
	1	50	11.48	11.63	11.28		0
	1	99	11.54	11.61	11.26		0
	50	0	11.52	11.60	11.52	0-1	0
	50	25	11.55	11.63	11.55		0
	50	50	11.53	11.61	11.48		0
	100	0	11.60	11.54	11.47		0
16QAM	1	0	11.62	11.81	11.73	0-1	0
	1	50	11.58	11.70	11.71		0
	1	99	11.68	11.68	11.63		0
	50	0	11.45	11.48	11.40	0-2	0
	50	25	11.59	11.56	11.49		0
	50	50	11.58	11.48	11.46		0
	100	0	11.55	11.53	11.40		0
64QAM	1	0	11.40	11.63	11.43	0-2	0
	1	50	11.52	11.60	11.41		0
	1	99	11.50	11.51	11.35		0
	50	0	11.32	11.39	11.32	0-3	0
	50	25	11.42	11.44	11.32		0
	50	50	11.42	11.40	11.40		0
	100	0	11.42	11.44	11.31		0
256QAM	1	0	11.44	11.53	11.44	0-5	0
	1	50	11.57	11.52	11.43		0
	1	99	11.65	11.49	11.47		0
	50	0	11.32	11.42	11.33		0
	50	25	11.46	11.46	11.32		0
	50	50	11.42	11.45	11.38		0
	100	0	11.41	11.46	11.28		0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 82 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-22
LTE Band 66 (AWS) Measured P_{Limit} Antenna 4 - 20 MHz Bandwidth

LTE Band 66 (AWS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132072 (1720.0 MHz)	132322 (1745.0 MHz)	132572 (1770.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.41	14.75	14.72	0	0
	1	50	14.50	14.78	14.73		0
	1	99	14.47	14.73	14.59		0
	50	0	14.60	14.69	14.68	0-1	0
	50	25	14.71	14.82	14.71		0
	50	50	14.70	14.76	14.74		0
	100	0	14.66	14.77	14.68		0
16QAM	1	0	14.62	14.82	14.66	0-1	0
	1	50	14.69	14.92	15.01		0
	1	99	14.70	14.85	14.61		0
	50	0	14.47	14.66	14.45	0-2	0
	50	25	14.58	14.72	14.53		0
	50	50	14.58	14.68	14.52		0
	100	0	14.60	14.63	14.45		0
64QAM	1	0	14.75	14.84	14.60	0-2	0
	1	50	15.04	15.09	14.70		0
	1	99	14.66	14.83	14.57		0
	50	0	14.50	14.65	14.53	0-3	0
	50	25	14.60	14.71	14.48		0
	50	50	14.59	14.68	14.53		0
	100	0	14.54	14.60	14.46		0
256QAM	1	0	14.67	14.95	14.71	0-5	0
	1	50	14.76	14.97	14.74		0
	1	99	14.66	14.79	14.50		0
	50	0	14.46	14.62	14.52		0
	50	25	14.59	14.73	14.49		0
	50	50	14.60	14.67	14.50		0
	100	0	14.58	14.60	14.46		0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 83 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

8.2.8

LTE Band 25

Table 8-23

LTE Band 25 (PCS) Measured P_{Limit} Antenna 1b - 20 MHz Bandwidth

LTE Band 25 (PCS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26140 (1860.0 MHz)	26365 (1882.5 MHz)	26590 (1905.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	11.79	11.92	12.11	0	0
	1	50	11.92	11.94	12.00		0
	1	99	11.89	11.92	11.96		0
	50	0	11.94	11.91	11.96	0-1	0
	50	25	11.92	11.93	12.01		0
	50	50	12.01	11.97	12.02		0
	100	0	11.91	11.92	12.00		0
16QAM	1	0	11.71	11.84	11.96	0-1	0
	1	50	11.80	11.97	12.11		0
	1	99	11.81	11.85	11.96		0
	50	0	11.68	11.65	11.70	0-2	0
	50	25	11.73	11.71	11.68		0
	50	50	11.70	11.74	11.73		0
	100	0	11.69	11.70	11.70		0
64QAM	1	0	11.81	11.74	12.00	0-2	0
	1	50	11.86	12.11	11.97		0
	1	99	11.87	11.93	11.81		0
	50	0	11.65	11.83	11.84	0-3	0
	50	25	11.77	11.97	11.88		0
	50	50	11.76	11.94	11.80		0
	100	0	11.73	11.88	11.86		0
256QAM	1	0	11.71	11.95	12.00	0-5	0
	1	50	12.00	12.11	12.12		0
	1	99	11.85	12.25	11.87		0
	50	0	11.65	11.80	11.80		0
	50	25	11.78	11.91	11.86		0
	50	50	11.79	11.91	11.77		0
	100	0	11.74	11.87	11.78		0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 84 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-24
LTE Band 25 (PCS) Measured P_{Limit} Antenna 2 - 20 MHz Bandwidth

LTE Band 25 (PCS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26140 (1860.0 MHz)	26365 (1882.5 MHz)	26590 (1905.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.87	14.90	14.65	0	0
	1	50	15.06	14.99	14.71		0
	1	99	14.97	14.89	14.57		0
	50	0	15.00	14.97	14.84	0-1	0
	50	25	15.11	14.94	14.92		0
	50	50	15.07	14.96	14.87		0
	100	0	15.02	14.90	14.88		0
16QAM	1	0	14.82	14.95	14.72	0-1	0
	1	50	14.86	15.22	14.93		0
	1	99	14.75	14.92	14.68		0
	50	0	14.72	14.76	14.55	0-2	0
	50	25	14.82	14.76	14.52		0
	50	50	14.81	14.72	14.48		0
	100	0	14.76	14.75	14.50		0
64QAM	1	0	15.03	14.97	14.88	0-2	0
	1	50	15.36	15.08	15.04		0
	1	99	14.91	14.79	14.68		0
	50	0	14.86	14.84	14.67	0-3	0
	50	25	14.96	14.89	14.66		0
	50	50	14.96	14.79	14.52		0
	100	0	14.92	14.76	14.64		0
256QAM	1	0	14.81	15.05	14.83	0-5	0
	1	50	15.01	15.20	14.92		0
	1	99	15.01	14.99	14.69		0
	50	0	14.82	14.81	14.62		0
	50	25	14.95	14.91	14.66		0
	50	50	14.91	14.75	14.53		0
	100	0	14.88	14.81	14.67		0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 85 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-25
LTE Band 25 (PCS) Measured P_{Limit} Antenna 3b - 20 MHz Bandwidth

LTE Band 25 (PCS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26140 (1860.0 MHz)	26365 (1882.5 MHz)	26590 (1905.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	11.84	12.00	11.96	0	0
	1	50	11.91	12.13	12.07		0
	1	99	11.79	11.99	12.01		0
	50	0	12.10	12.08	12.06	0-1	0
	50	25	12.12	12.15	12.14		0
	50	50	12.09	12.11	12.10		0
	100	0	12.07	12.12	12.10		0
16QAM	1	0	11.71	11.94	12.09	0-1	0
	1	50	11.79	11.98	12.23		0
	1	99	11.67	11.85	12.10		0
	50	0	11.66	11.72	11.83	0-2	0
	50	25	11.69	11.81	11.86		0
	50	50	11.73	11.83	11.98		0
	100	0	11.66	11.69	11.84		0
64QAM	1	0	11.85	12.02	12.09	0-2	0
	1	50	11.85	11.91	12.19		0
	1	99	11.76	12.09	12.28		0
	50	0	11.72	11.78	11.98	0-3	0
	50	25	11.81	11.83	12.03		0
	50	50	11.78	11.92	12.15		0
	100	0	11.80	11.78	12.02		0
256QAM	1	0	11.94	11.97	12.09	0-5	0
	1	50	12.06	12.10	12.34		0
	1	99	12.07	12.17	12.30		0
	50	0	11.67	11.76	11.96		0
	50	25	11.81	11.88	12.05		0
	50	50	11.73	11.91	12.13		0
	100	0	11.77	11.78	12.02		0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 86 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-26
LTE Band 25 (PCS) Measured P_{Limit} Antenna 4 - 20 MHz Bandwidth

LTE Band 25 (PCS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26140 (1860.0 MHz)	26365 (1882.5 MHz)	26590 (1905.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	12.77	12.80	12.83	0	0
	1	50	12.98	12.99	12.98		0
	1	99	12.76	12.78	12.88		0
	50	0	13.03	13.06	12.95	0-1	0
	50	25	13.00	13.00	13.00		0
	50	50	13.05	13.03	12.99		0
	100	0	12.82	12.90	12.93		0
16QAM	1	0	13.41	13.35	13.37	0-1	0
	1	50	13.39	13.38	13.31		0
	1	99	13.29	13.21	13.16		0
	50	0	13.14	13.18	13.15	0-2	0
	50	25	13.15	13.09	13.12		0
	50	50	13.12	13.14	13.11		0
	100	0	13.16	13.09	13.19		0
64QAM	1	0	13.16	13.13	13.23	0-2	0
	1	50	13.31	13.29	13.39		0
	1	99	13.20	13.04	13.11		0
	50	0	13.01	12.98	12.99	0-3	0
	50	25	13.07	13.03	13.08		0
	50	50	13.06	13.07	13.04		0
	100	0	13.05	13.01	13.07		0
256QAM	1	0	13.11	13.01	13.27	0-5	0
	1	50	13.21	13.14	13.38		0
	1	99	13.39	13.15	13.26		0
	50	0	12.95	13.04	12.99		0
	50	25	13.09	13.12	13.07		0
	50	50	13.05	13.05	13.06		0
	100	0	13.03	13.03	13.07		0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 87 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

8.2.9

LTE Band 30

Table 8-27

LTE Band 30 Measured P_{Limit} Antenna 1b - 10 MHz Bandwidth

LTE Band 30 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			27710 (2310.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	11.90	0	0
	1	25	11.99		0
	1	49	12.01		0
	25	0	11.96	0-1	0
	25	12	12.03		0
	25	25	11.97		0
	50	0	12.00		0
16QAM	1	0	12.05	0-1	0
	1	25	12.13		0
	1	49	12.07		0
	25	0	11.81	0-2	0
	25	12	11.91		0
	25	25	11.81		0
	50	0	11.82		0
64QAM	1	0	11.97	0-2	0
	1	25	12.01		0
	1	49	11.90		0
	25	0	11.79	0-3	0
	25	12	11.88		0
	25	25	11.80		0
	50	0	11.81		0
256QAM	1	0	11.96	0-5	0
	1	25	11.99		0
	1	49	12.01		0
	25	0	11.75		0
	25	12	11.81		0
	25	25	11.79		0
	50	0	11.75		0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 88 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-28
LTE Band 30 Measured P_{Limit} Antenna 2 - 10 MHz Bandwidth

LTE Band 30 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			27710 (2310.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	11.98	0	0
	1	25	12.04		0
	1	49	11.95		0
	25	0	12.01	0-1	0
	25	12	12.09		0
	25	25	11.98		0
	50	0	11.99		0
16QAM	1	0	12.17	0-1	0
	1	25	12.19		0
	1	49	12.08		0
	25	0	11.90	0-2	0
	25	12	11.96		0
	25	25	11.84		0
	50	0	11.90		0
64QAM	1	0	12.10	0-2	0
	1	25	12.07		0
	1	49	12.03		0
	25	0	11.90	0-3	0
	25	12	11.94		0
	25	25	11.83		0
	50	0	11.88		0
256QAM	1	0	12.07	0-5	0
	1	25	12.17		0
	1	49	12.05		0
	25	0	11.90		0
	25	12	11.92		0
	25	25	11.82		0
	50	0	11.88		0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 89 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-29
LTE Band 30 Measured P_{Limit} Antenna 3b - 10 MHz Bandwidth

LTE Band 30 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			27710 (2310.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	12.25	0	0
	1	25	12.24		0
	1	49	12.16		0
	25	0	12.29	0-1	0
	25	12	12.31		0
	25	25	12.28		0
	50	0	12.24		0
16QAM	1	0	12.45	0-1	0
	1	25	12.44		0
	1	49	12.43		0
	25	0	12.32	0-2	0
	25	12	12.29		0
	25	25	12.28		0
	50	0	12.25		0
64QAM	1	0	12.50	0-2	0
	1	25	12.51		0
	1	49	12.43		0
	25	0	12.33	0-3	0
	25	12	12.36		0
	25	25	12.34		0
	50	0	12.35		0
256QAM	1	0	12.35	0-5	0
	1	25	12.45		0
	1	49	12.43		0
	25	0	12.35		0
	25	12	12.40		0
	25	25	12.36		0
	50	0	12.34		0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 90 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-30
LTE Band 30 Measured P_{Limit} Antenna 4 - 10 MHz Bandwidth

LTE Band 30 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			27710 (2310.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	13.16	0	0
	1	25	13.25		0
	1	49	13.14		0
	25	0	13.27	0-1	0
	25	12	13.29		0
	25	25	13.28		0
	50	0	13.23		0
16QAM	1	0	13.00	0-1	0
	1	25	13.05		0
	1	49	13.01		0
	25	0	12.77	0-2	0
	25	12	12.85		0
	25	25	12.82		0
	50	0	12.79		0
64QAM	1	0	12.90	0-2	0
	1	25	12.96		0
	1	49	12.92		0
	25	0	12.79	0-3	0
	25	12	12.81		0
	25	25	12.80		0
	50	0	12.78		0
256QAM	1	0	12.89	0-5	0
	1	25	12.96		0
	1	49	13.03		0
	25	0	12.78		0
	25	12	12.82		0
	25	25	12.81		0
	50	0	12.79		0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 91 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

8.2.10

LTE Band 7

Table 8-31

LTE Band 7 Measured P_{Limit} Antenna 1b - 20 MHz Bandwidth

LTE Band 7 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20850 (2510.0 MHz)	21100 (2535.0 MHz)	21350 (2560.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	11.49	11.74	11.75	0	0
	1	50	11.73	11.83	11.86		0
	1	99	11.48	11.69	11.74		0
	50	0	11.85	11.79	11.86	0-1	0
	50	25	11.73	11.85	11.92		0
	50	50	11.72	11.81	11.89		0
	100	0	11.70	11.82	11.84		0
16QAM	1	0	11.92	11.95	12.04	0-1	0
	1	50	12.19	12.09	12.18		0
	1	99	11.84	12.05	12.06		0
	50	0	11.95	11.86	11.86	0-2	0
	50	25	11.88	11.87	11.92		0
	50	50	11.86	11.86	11.96		0
	100	0	11.87	11.86	11.92		0
64QAM	1	0	11.98	12.01	12.06	0-2	0
	1	50	12.04	12.07	12.22		0
	1	99	11.91	12.01	12.11		0
	50	0	11.96	11.85	11.91	0-3	0
	50	25	11.87	11.86	11.94		0
	50	50	11.84	11.85	11.92		0
	100	0	11.83	11.86	11.91		0
256QAM	1	0	12.01	11.94	12.10	0-5	0
	1	50	12.03	12.21	12.19		0
	1	99	11.94	11.95	12.11		0
	50	0	11.94	11.85	11.89		0
	50	25	11.85	11.86	11.94		0
	50	50	11.84	11.85	11.93		0
	100	0	11.86	11.85	11.91		0

Table 8-32

LTE Band 7 Antenna 1b Uplink Carrier Aggregation Measured P_{Limit}

	PCC									SCC								Power		
Combination	PCC Band	PCC Bandwidth [MHz]	PCC UL Channel	PCC UL Frequency [MHz]	PCC DL Channel	PCC DL Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC UL Channel	SCC UL Frequency [MHz]	SCC DL Channel	SCC DL Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_7C	LTE B7	20	20850	2510.0	2850	2630.0	QPSK	1	99	LTE B7	20	21048	2529.8	3048	2649.8	QPSK	1	0	11.49	11.48

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 92 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-33
LTE Band 7 Measured P_{Limit} Antenna 2 - 20 MHz Bandwidth

LTE Band 7							
20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20850 (2510.0 MHz)	21100 (2535.0 MHz)	21350 (2560.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	11.35	11.12	11.21	0	0
	1	50	11.47	11.18	11.32		0
	1	99	11.34	11.04	11.23		0
	50	0	11.53	11.39	11.31	0-1	0
	50	25	11.46	11.41	11.36		0
	50	50	11.41	11.36	11.29		0
16QAM	100	0	11.43	11.40	11.33	0-1	0
	1	0	11.55	11.57	11.56		0
	1	50	11.67	11.78	11.64		0
	1	99	11.57	11.57	11.59	0-2	0
	50	0	11.53	11.44	11.38		0
	50	25	11.53	11.43	11.39		0
64QAM	50	50	11.43	11.33	11.33	0-2	0
	100	0	11.51	11.39	11.36		0
	1	0	11.55	11.57	11.42		0-2
	1	50	11.64	11.48	11.44	0	
	1	99	11.51	11.40	11.43	0	
	256QAM	50	0	11.56	11.42	11.37	0-3
50		25	11.54	11.40	11.41	0	
50		50	11.45	11.37	11.34	0	
100		0	11.53	11.38	11.36	0-5	0
1		0	11.64	11.53	11.46		0
1		50	11.59	11.48	11.45		0
1	99	11.58	11.52	11.45	0		
50	0	11.53	11.40	11.34	0		
50	25	11.56	11.44	11.37	0		
50	50	11.48	11.36	11.31	0		
100	0	11.58	11.40	11.38	0		

Table 8-34
LTE Band 7 Antenna 2 Uplink Carrier Aggregation Measured P_{Limit}

Combination	PCC										SCC						Power			
	PCC Band	PCC Bandwidth [MHz]	PCC UL Channel	PCC UL Frequency [MHz]	PCC DL Channel	PCC DL Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC UL Channel	SCC UL Frequency [MHz]	SCC DL Channel	SCC DL Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_7C	LTE B7	20	21100	2535.0	3100	2655.0	QPSK	1	99	LTE B7	20	21298	2554.8	3298	2674.8	QPSK	1	0	11.04	11.04

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 93 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-35
LTE Band 7 Measured P_{Limit} Antenna 3b - 20 MHz Bandwidth

LTE Band 7 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20850	21100	21350		
			(2510.0 MHz)	(2535.0 MHz)	(2560.0 MHz)		
Conducted Power [dBm]							
QPSK	1	0	11.40	11.36	11.10	0	0
	1	50	11.34	11.47	11.18		0
	1	99	11.27	11.38	11.14		0
	50	0	11.35	11.40	11.43	0-1	0
	50	25	11.41	11.49	11.45		0
	50	50	11.34	11.42	11.36		0
	100	0	11.37	11.42	11.41	0	
16QAM	1	0	11.51	11.57	11.60	0-1	0
	1	50	11.55	11.80	11.67		0
	1	99	11.51	11.55	11.65		0
	50	0	11.52	11.47	11.43	0-2	0
	50	25	11.46	11.46	11.40		0
	50	50	11.45	11.37	11.38		0
	100	0	11.42	11.45	11.42	0	
64QAM	1	0	11.48	11.64	11.60	0-2	0
	1	50	11.55	11.65	11.70		0
	1	99	11.57	11.54	11.64		0
	50	0	11.52	11.48	11.44	0-3	0
	50	25	11.43	11.45	11.42		0
	50	50	11.42	11.40	11.37		0
	100	0	11.41	11.45	11.43	0	
256QAM	1	0	11.53	11.54	11.56	0-5	0
	1	50	11.55	11.61	11.72		0
	1	99	11.54	11.59	11.57		0
	50	0	11.52	11.46	11.46		0
	50	25	11.43	11.44	11.44		0
	50	50	11.44	11.39	11.36		0
	100	0	11.44	11.46	11.42		0

Table 8-36
LTE Band 7 Antenna 3b Uplink Carrier Aggregation Measured P_{Limit}

	PCC									SCC								Power		
Combination	PCC Band	PCC Bandwidth [MHz]	PCC UL Channel	PCC UL Frequency [MHz]	PCC DL Channel	PCC DL Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC UL Channel	SCC UL Frequency [MHz]	SCC DL Channel	SCC DL Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_7C	LTE B7	20	20850	2510.0	2850	2630.0	QPSK	1	99	LTE B7	20	21048	2529.8	3048	2649.8	QPSK	1	0	11.23	11.27

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 94 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-37
LTE Band 7 Measured P_{Limit} Antenna 4 - 20 MHz Bandwidth

LTE Band 7 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20850 (2510.0 MHz)	21100 (2535.0 MHz)	21350 (2560.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	10.48	10.63	10.58	0	0
	1	50	10.55	10.72	10.68		0
	1	99	10.47	10.59	10.63		0
	50	0	10.78	10.68	10.66	0-1	0
	50	25	10.77	10.71	10.73		0
	50	50	10.70	10.70	10.75		0
	100	0	10.71	10.65	10.69		0
16QAM	1	0	10.88	10.83	10.75	0-1	0
	1	50	10.90	10.95	10.87		0
	1	99	10.78	10.84	10.75		0
	50	0	10.82	10.78	10.61	0-2	0
	50	25	10.81	10.72	10.63		0
	50	50	10.73	10.67	10.49		0
	100	0	10.73	10.75	10.58		0
64QAM	1	0	10.76	10.83	10.67	0-2	0
	1	50	10.91	10.81	10.67		0
	1	99	10.78	10.71	10.52		0
	50	0	10.75	10.72	10.57	0-3	0
	50	25	10.77	10.71	10.59		0
	50	50	10.72	10.66	10.51		0
	100	0	10.73	10.70	10.58		0
256QAM	1	0	10.93	10.87	10.73	0-5	0
	1	50	10.93	10.78	10.62		0
	1	99	10.91	10.75	10.64		0
	50	0	10.78	10.71	10.56		0
	50	25	10.84	10.75	10.60		0
	50	50	10.76	10.63	10.49		0
	100	0	10.74	10.74	10.55		0

Table 8-38
LTE Band 7 Antenna 4 Uplink Carrier Aggregation Measured P_{Limit}

Combination	PCC									SCC									Power		
	PCC Band	PCC Bandwidth [MHz]	PCC UL Channel	PCC UL Frequency [MHz]	PCC DL Channel	PCC DL Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC UL Channel	SCC UL Frequency [MHz]	SCC DL Channel	SCC DL Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dbm)	LTE Single Carrier Tx Power (dbm)	
CA_7C	LTE B7	20	21350	2560.0	3350	2680.0	QPSK	1	0	LTE B7	20	21152	2540.2	3152	2660.2	QPSK	1	99	10.48	10.58	

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 95 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

8.2.11

LTE Band 41

Table 8-39

LTE Band 41 PC3 Measured P_{Limit} Antenna 1b - 20 MHz Bandwidth

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	12.78	12.79	12.82	12.66	12.64	0	0
	1	50	12.85	12.92	12.88	12.70	12.68		0
	1	99	12.77	12.74	12.79	12.77	12.67		0
	50	0	12.95	12.93	12.94	12.72	12.73	0-1	0
	50	25	12.98	12.99	12.98	12.73	12.81		0
	50	50	12.89	12.91	12.87	12.69	12.74		0
	100	0	12.87	12.91	12.90	12.75	12.74		0
16QAM	1	0	13.31	13.12	13.08	13.03	12.94	0-1	0
	1	50	13.37	13.25	13.16	13.10	13.02		0
	1	99	13.23	13.00	13.12	12.96	13.08		0
	50	0	13.30	13.15	13.13	12.92	13.03	0-2	0
	50	25	13.22	13.18	13.18	12.96	13.08		0
	50	50	13.23	13.14	13.07	12.93	13.04		0
	100	0	13.22	13.19	13.13	12.98	13.09		0
64QAM	1	0	13.32	13.12	13.13	12.87	12.88	0-2	0
	1	50	13.40	13.31	13.19	12.99	13.05		0
	1	99	13.22	12.99	13.02	13.05	13.20		0
	50	0	13.29	13.15	13.15	12.94	13.07	0-3	0
	50	25	13.23	13.19	13.16	13.00	13.07		0
	50	50	13.24	13.12	13.07	12.95	13.06		0
	100	0	13.21	13.16	13.14	12.98	13.09		0
256QAM	1	0	13.28	13.17	13.04	12.93	13.02	0-5	0
	1	50	13.28	13.17	13.09	13.04	12.98		0
	1	99	13.24	12.98	13.03	13.11	13.00		0
	50	0	13.29	13.16	13.13	12.92	13.04		0
	50	25	13.23	13.18	13.16	12.99	13.06		0
	50	50	13.23	13.10	13.06	12.94	13.05		0
	100	0	13.22	13.20	13.13	12.99	13.06		0

Table 8-40

LTE Band 41 PC3 Antenna 1b Uplink Carrier Aggregation Measured P_{Limit}

	PCC							SCC							Power	
Combination	PCC Band	PCC Bandwidth [MHz]	PCC (UL/DL) Channel	PCC (UL/DL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL/DL) Channel	SCC (UL/DL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_41C	LTE B41	20	41055	2636.5	QPSK	50	0	LTE B41	20	40857	2616.7	QPSK	50	50	13.30	12.72

Table 8-41

LTE Band 41 PC2 Measured P_{Limit} Antenna 1b - 20 MHz Bandwidth

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	14.98	14.90	15.08	14.82	14.93	0	0
	1	50	14.95	15.05	15.15	14.94	15.08		0
	1	99	15.06	14.92	15.12	14.91	15.07		0
	50	0	15.16	15.11	15.12	14.85	14.92	0-1	0
	50	25	15.09	15.09	15.18	14.89	15.01		0
	50	50	15.11	15.10	15.09	14.88	14.95		0
	100	0	15.03	15.07	15.08	15.00	14.96		0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 96 of 255

REV 25.0

10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-42
LTE Band 41 PC2 Antenna 1b Uplink Carrier Aggregation Measured P_{Limit}

Combination	PCC							SCC							Power	
	PCC Band	PCC Bandwidth [MHz]	PCC (UL/DL) Channel	PCC (UL/DL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL/DL) Channel	SCC (UL/DL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_41C	LTE B41 PC2	20	41055	2636.5	QPSK	50	0	LTE B41 PC2	20	40857	2616.7	QPSK	50	50	15.06	14.85

Table 8-43
LTE Band 41 PC3 Measured P_{Limit} Antenna 2 - 20 MHz Bandwidth

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	14.40	14.22	14.28	14.19	14.15	0	0
	1	50	14.41	14.51	14.32	14.28	14.20		0
	1	99	14.39	14.21	14.39	14.37	14.26		0
	50	0	14.45	14.47	14.36	14.31	14.24	0-1	0
	50	25	14.46	14.59	14.42	14.40	14.31		0
	50	50	14.43	14.33	14.35	14.33	14.24		0
	100	0	14.39	14.47	14.38	14.33	14.22		0
16QAM	1	0	14.39	14.01	14.05	13.96	13.85	0-1	0
	1	50	14.33	14.19	14.04	14.01	13.95		0
	1	99	14.29	13.93	14.05	13.97	13.99		0
	50	0	14.40	14.17	14.06	14.03	14.03	0-2	0
	50	25	14.38	14.14	14.08	14.06	14.05		0
	50	50	14.27	14.04	14.02	13.99	14.00		0
	100	0	14.35	14.13	14.09	14.05	14.04		0
64QAM	1	0	14.22	13.91	13.91	14.06	13.88	0-2	0
	1	50	14.36	13.96	13.99	14.03	14.08		0
	1	99	14.18	13.88	14.02	14.03	13.99		0
	50	0	14.39	14.18	14.08	14.04	14.02	0-3	0
	50	25	14.38	14.18	14.11	14.08	14.06		0
	50	50	14.30	14.04	14.02	14.00	14.03		0
	100	0	14.39	14.12	14.09	14.05	14.09		0
256QAM	1	0	14.20	13.81	13.71	13.83	13.90	0-5	0
	1	50	14.21	13.80	13.71	13.85	13.92		0
	1	99	14.07	13.78	13.85	13.84	14.02		0
	50	0	14.26	13.97	13.91	13.93	13.96		0
	50	25	14.19	14.00	13.93	13.97	13.99		0
	50	50	14.17	13.87	13.87	13.90	13.95		0
	100	0	14.17	13.94	13.93	13.94	14.01		0

Table 8-44
LTE Band 41 PC3 Antenna 2 Uplink Carrier Aggregation Measured P_{Limit}

Combination	PCC							SCC							Power	
	PCC Band	PCC Bandwidth [MHz]	PCC (UL/DL) Channel	PCC (UL/DL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL/DL) Channel	SCC (UL/DL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_41C	LTE B41	20	39750	2506.0	QPSK	1	99	LTE B41	20	39948	2525.8	QPSK	1	0	14.66	14.39

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 97 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-45
LTE Band 41 PC2 Measured P_{Limit} Antenna 2 - 20 MHz Bandwidth

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	15.87	15.92	15.77	15.83	15.86	0	0
	1	50	15.93	15.97	15.83	15.92	15.94		0
	1	99	15.91	15.86	15.81	15.89	15.95		0
	50	0	16.05	15.96	15.90	15.95	15.90	0-1	0
	50	25	16.02	15.98	15.95	16.02	15.93		0
	50	50	15.98	15.89	15.86	15.94	15.84		0
	100	0	15.96	15.95	15.91	15.97	15.90		0

Table 8-46
LTE Band 41 PC2 Antenna 2 Uplink Carrier Aggregation Measured P_{Limit}

	PCC							SCC							Power	
Combination	PCC Band	PCC Bandwidth [MHz]	PCC (UL/DL) Channel	PCC (UL/DL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL/DL) Channel	SCC (UL/DL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_41C	LTE B41 PC2	20	39750	2506.0	QPSK	1	99	LTE B41 PC2	20	39948	2525.8	QPSK	1	0	16.07	15.91

Table 8-47
LTE Band 41 PC3 Measured P_{Limit} Antenna 3b - 20 MHz Bandwidth

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	13.95	13.98	14.01	13.82	13.92	0	0
	1	50	14.06	14.13	14.08	13.91	14.07		0
	1	99	13.94	13.95	14.02	13.94	14.03		0
	50	0	14.12	14.13	14.12	13.97	14.10	0-1	0
	50	25	14.07	14.16	14.15	14.06	14.15		0
	50	50	14.04	14.09	14.06	13.98	14.09		0
	100	0	14.02	14.12	14.10	13.98	14.11		0
16QAM	1	0	14.24	14.18	14.12	14.06	13.92	0-1	0
	1	50	14.35	14.26	14.37	14.33	14.08		0
	1	99	14.10	14.07	14.11	14.05	13.91		0
	50	0	14.17	14.20	14.23	14.01	14.02	0-2	0
	50	25	14.18	14.11	14.24	14.05	14.05		0
	50	50	14.13	14.11	14.16	14.14	13.98		0
	100	0	14.17	14.12	14.14	14.04	14.02		0
64QAM	1	0	14.03	13.98	14.10	13.90	14.05	0-2	0
	1	50	14.07	13.93	14.08	14.07	13.92		0
	1	99	13.94	13.96	14.00	13.96	14.06		0
	50	0	14.15	14.16	14.16	14.03	14.02	0-3	0
	50	25	14.16	14.07	14.20	14.05	14.07		0
	50	50	14.11	14.11	14.09	14.02	13.97		0
	100	0	14.15	14.05	14.10	14.02	14.01		0
256QAM	1	0	14.16	14.00	14.10	14.03	13.85	0-5	0
	1	50	14.09	14.08	14.13	14.03	13.84		0
	1	99	14.04	14.04	14.07	14.04	13.88		0
	50	0	14.12	14.13	14.16	14.04	13.97		0
	50	25	14.16	14.11	14.18	14.08	14.00		0
	50	50	14.08	14.07	14.12	13.98	13.96		0
	100	0	14.12	14.06	14.09	14.05	14.01		0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 98 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-48
LTE Band 41 PC3 Antenna 3b Uplink Carrier Aggregation Measured P_{Limit}

	PCC							SCC							Power		
Combination	PCC Band	PCC Bandwidth [MHz]	PCC (UL/DL) Channel	PCC (UL/DL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL/DL) Channel	SCC (UL/DL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)	
CA_41C	LTE B41	20	39750	2506.0	QPSK	50	50	LTE B41	20	39948	2525.8	QPSK	50	0	14.03	14.04	

Table 8-49
LTE Band 41 PC2 Measured P_{Limit} Antenna 3b - 20 MHz Bandwidth

LTE Band 41									
20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	15.78	15.69	15.88	15.54	15.70	0	0
	1	50	15.85	15.78	15.90	15.61	15.81		0
	1	99	15.74	15.70	15.89	15.64	15.85		0
	50	0	15.81	15.83	15.87	15.68	15.80		0
	50	25	15.78	15.85	15.93	15.71	15.87	0-1	0
	50	50	15.73	15.77	15.81	15.65	15.85		0
	100	0	15.71	15.80	15.87	15.68	15.87		0

Table 8-50
LTE Band 41 PC2 Antenna 3b Uplink Carrier Aggregation Measured P_{Limit}

	PCC							SCC							Power	
Combination	PCC Band	PCC Bandwidth [MHz]	PCC (UL/DL) Channel	PCC (UL/DL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL/DL) Channel	SCC (UL/DL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_41C	LTE B41 PC2	20	39750	2506.0	QPSK	50	50	LTE B41 PC2	20	39948	2525.8	QPSK	50	0	15.88	15.73

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 99 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-51
LTE Band 41 PC3 Measured P_{Limit} Antenna 4 - 20 MHz Bandwidth

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	12.65	12.52	12.47	12.51	12.44	0	0
	1	50	12.68	12.69	12.57	12.57	12.53		0
	1	99	12.63	12.49	12.62	12.59	12.50		0
	50	0	12.74	12.66	12.60	12.63	12.52	0-1	0
	50	25	12.72	12.75	12.68	12.66	12.55		0
	50	50	12.71	12.62	12.61	12.61	12.49		0
	100	0	12.67	12.68	12.66	12.64	12.54		0
16QAM	1	0	12.65	12.49	12.36	12.52	12.41	0-1	0
	1	50	12.67	12.40	12.38	12.41	12.47		0
	1	99	12.47	12.35	12.52	12.51	12.32		0
	50	0	12.69	12.49	12.45	12.52	12.35	0-2	0
	50	25	12.64	12.54	12.51	12.56	12.42		0
	50	50	12.62	12.42	12.42	12.50	12.33		0
	100	0	12.63	12.50	12.47	12.50	12.38		0
64QAM	1	0	12.57	12.28	12.22	12.35	12.19	0-2	0
	1	50	12.78	12.53	12.35	12.55	12.24		0
	1	99	12.53	12.37	12.50	12.44	12.36		0
	50	0	12.69	12.50	12.44	12.49	12.35	0-3	0
	50	25	12.64	12.50	12.48	12.53	12.40		0
	50	50	12.60	12.40	12.40	12.41	12.32		0
	100	0	12.57	12.44	12.45	12.47	12.37		0
256QAM	1	0	12.70	12.39	12.43	12.31	12.26	0-5	0
	1	50	12.76	12.51	12.56	12.46	12.23		0
	1	99	12.57	12.41	12.45	12.34	12.15		0
	50	0	12.67	12.49	12.42	12.46	12.38	0-5	0
	50	25	12.67	12.50	12.47	12.51	12.41		0
	50	50	12.57	12.41	12.39	12.42	12.30		0
	100	0	12.60	12.47	12.45	12.49	12.41		0

Table 8-52
LTE Band 41 PC3 Antenna 4 Uplink Carrier Aggregation Measured P_{Limit}

	PCC							SCC							Power	
Combination	PCC Band	PCC Bandwidth [MHz]	PCC (UL/DL) Channel	PCC (UL/DL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL/DL) Channel	SCC (UL/DL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_41C	LTE B41	20	41490	2680.0	QPSK	50	0	LTE B41	20	41292	2660.2	QPSK	50	50	12.43	12.52

Table 8-53
LTE Band 41 PC2 Measured P_{Limit} Antenna 4 - 20 MHz Bandwidth

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	14.24	14.17	14.12	14.28	14.07	0	0
	1	50	14.35	14.26	14.22	14.32	14.08		0
	1	99	14.31	14.14	14.23	14.34	14.10		0
	50	0	14.42	14.38	14.26	14.30	14.15	0-1	0
	50	25	14.38	14.43	14.32	14.34	14.22		0
	50	50	14.38	14.31	14.25	14.28	14.12		0
	100	0	14.35	14.36	14.25	14.31	14.17		0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 100 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-54
LTE Band 41 PC2 Antenna 4 Uplink Carrier Aggregation Measured P_{Limit}

Combination	PCC							SCC							Power	
	PCC Band	PCC Bandwidth [MHz]	PCC (UL/DL) Channel	PCC (UL/DL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL/DL) Channel	SCC (UL/DL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_41C	LTE B41 PC2	20	41490	2680.0	QPSK	50	0	LTE B41 PC2	20	41292	2660.2	QPSK	50	50	14.19	14.15

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 101 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

8.2.12

LTE Band 48

Table 8-55

LTE Band 48 Measured P_{Limit} Antenna 1a - 20 MHz Bandwidth

LTE Band 48 20 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			55340 (3560.0 MHz)	55773 (3603.3 MHz)	56207 (3646.7 MHz)	56640 (3690.0 MHz)		
			Conducted Power [dBm]					
QPSK	1	0	10.84	10.78	10.74	10.70	0	0
	1	50	11.00	10.92	10.84	10.81		0
	1	99	10.93	10.83	10.68	10.64		0
	50	0	11.01	11.00	10.89	10.84	0-1	0
	50	25	11.09	11.05	10.94	10.88		0
	50	50	11.05	11.01	10.90	10.83		0
	100	0	10.99	10.98	10.91	10.82		0
16QAM	1	0	11.27	11.09	11.15	11.13	0-1	0
	1	50	11.34	11.26	11.27	11.14		0
	1	99	11.30	11.14	11.02	10.99		0
	50	0	11.23	11.22	11.22	11.11	0-2	0
	50	25	11.24	11.26	11.26	11.10		0
	50	50	11.24	11.23	11.13	11.07		0
	100	0	11.26	11.23	11.23	11.09		0
64QAM	1	0	11.36	11.20	11.25	11.19	0-2	0
	1	50	11.37	11.33	11.25	11.23		0
	1	99	11.38	11.27	11.27	11.09		0
	50	0	11.38	11.38	11.39	11.31	0-3	0
	50	25	11.41	11.39	11.42	11.30		0
	50	50	11.38	11.41	11.41	11.28		0
	100	0	11.38	11.40	11.41	11.30		0
256QAM	1	0	11.30	11.25	11.25	11.36	0-5	0
	1	50	11.36	11.22	11.27	11.28		0
	1	99	11.42	11.32	11.26	11.30		0
	50	0	11.36	11.33	11.37	11.29		0
	50	25	11.41	11.37	11.38	11.31		0
	50	50	11.38	11.35	11.39	11.29		0
	100	0	11.36	11.36	11.38	11.29		0

Table 8-56

LTE Band 48 Antenna 1a Uplink Carrier Aggregation Measured P_{Limit}

	PCC							SCC						Power		
Combination	PCC Band	PCC Bandwidth [MHz]	PCC (UL/DL) Channel	PCC (UL/DL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL/DL) Channel	SCC (UL/DL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_48C	LTE B48	20	56207	3646.7	QPSK	50	0	LTE B48	20	56009	3626.9	QPSK	50	50	10.79	10.89

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 102 of 255

REV 25.0

10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-57
LTE Band 48 Measured P_{Limit} Antenna 2 - 20 MHz Bandwidth

LTE Band 48 20 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			55340 (3560.0 MHz)	55773 (3603.3 MHz)	56207 (3646.7 MHz)	56640 (3690.0 MHz)		
			Conducted Power [dBm]					
QPSK	1	0	10.93	11.05	11.10	10.94	0	0
	1	50	11.14	11.21	11.16	11.00		0
	1	99	11.07	11.12	11.04	10.83		0
	50	0	11.08	11.11	11.25	11.07	0-1	0
	50	25	11.20	11.28	11.26	11.10		0
	50	50	11.22	11.27	11.24	11.06		0
100	0	11.16	11.20	11.19	11.07	0		
16QAM	1	0	11.22	11.38	11.46	11.23	0-1	0
	1	50	11.34	11.47	11.54	11.33		0
	1	99	11.27	11.44	11.45	11.21		0
	50	0	11.05	11.20	11.35	11.16	0-2	0
	50	25	11.17	11.32	11.36	11.18		0
	50	50	11.17	11.31	11.34	11.16		0
100	0	11.15	11.29	11.36	11.15	0		
64QAM	1	0	11.16	11.31	11.47	11.24	0-2	0
	1	50	11.34	11.43	11.59	11.20		0
	1	99	11.20	11.50	11.40	11.21		0
	50	0	11.05	11.18	11.35	11.15	0-3	0
	50	25	11.18	11.30	11.37	11.19		0
	50	50	11.15	11.29	11.35	11.15		0
100	0	11.13	11.28	11.35	11.13	0		
256QAM	1	0	11.21	11.36	11.45	11.26	0-5	0
	1	50	11.29	11.51	11.53	11.28		0
	1	99	11.28	11.43	11.37	11.17		0
	50	0	11.03	11.20	11.35	11.15		0
	50	25	11.18	11.31	11.37	11.16		0
	50	50	11.16	11.32	11.34	11.16		0
100	0	11.15	11.29	11.32	11.13	0		

Table 8-58
LTE Band 48 Antenna 2 Uplink Carrier Aggregation Measured P_{Limit}

Combination	PCC								SCC				Power			
	PCC Band	PCC Bandwidth [MHz]	PCC (UL/DL) Channel	PCC (UL/DL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL/DL) Channel	SCC (UL/DL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_48C	LTE B48	20	55340	3560.0	QPSK	1	99	LTE B48	20	55538	3579.8	QPSK	1	0	11.14	11.07

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 103 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-59
LTE Band 48 Measured P_{Limit} Antenna 3a - 20 MHz Bandwidth

LTE Band 48 20 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			55340 (3560.0 MHz)	55773 (3603.3 MHz)	56207 (3646.7 MHz)	56640 (3690.0 MHz)		
			Conducted Power [dBm]					
QPSK	1	0	10.95	10.94	10.94	10.83	0	0
	1	50	11.08	11.07	10.98	10.87		0
	1	99	11.02	11.06	10.83	10.73		0
	50	0	11.06	11.13	10.95	10.83	0-1	0
	50	25	11.18	11.15	10.99	10.88		0
	50	50	11.17	11.12	11.00	10.86		0
	100	0	11.07	11.06	10.95	10.93		0
16QAM	1	0	11.25	11.06	11.01	10.87	0-1	0
	1	50	11.23	11.20	11.01	10.94		0
	1	99	11.19	11.11	10.95	10.88		0
	50	0	11.14	10.96	10.81	10.71	0-2	0
	50	25	11.15	11.00	10.82	10.74		0
	50	50	11.05	10.94	10.88	10.82		0
	100	0	11.10	10.94	10.80	10.73		0
64QAM	1	0	11.21	11.04	11.02	10.84	0-2	0
	1	50	11.30	11.20	11.14	10.97		0
	1	99	11.14	11.11	10.95	10.91		0
	50	0	11.12	10.97	10.80	10.71	0-3	0
	50	25	11.10	10.98	10.82	10.76		0
	50	50	11.02	10.92	10.90	10.82		0
	100	0	11.12	10.99	10.78	10.73		0
256QAM	1	0	11.24	11.08	11.00	10.84	0-5	0
	1	50	11.32	11.17	11.00	10.94		0
	1	99	11.17	11.03	10.96	10.92		0
	50	0	11.10	10.98	10.82	10.71		0
	50	25	11.09	11.00	10.82	10.73		0
	50	50	11.03	10.94	10.87	10.80		0
	100	0	11.09	10.98	10.77	10.73		0

Table 8-60
LTE Band 48 Antenna 3a Uplink Carrier Aggregation Measured P_{Limit}

Combination	PCC								SCC				Power			
	PCC Band	PCC Bandwidth [MHz]	PCC (UL/DL) Channel	PCC (UL/DL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL/DL) Channel	SCC (UL/DL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_48C	LTE B48	20	56207	3646.7	QPSK	50	50	LTE B48	20	56405	3666.5	QPSK	50	0	10.92	11.00

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 104 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-61
LTE Band 48 Measured P_{Limit} Antenna 4 - 20 MHz Bandwidth

LTE Band 48 20 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			55340 (3560.0 MHz)	55773 (3603.3 MHz)	56207 (3646.7 MHz)	56640 (3690.0 MHz)		
			Conducted Power [dBm]					
QPSK	1	0	11.87	12.06	12.10	12.01	0	0
	1	50	12.03	12.25	12.21	12.08		0
	1	99	11.98	12.19	12.07	11.97		0
	50	0	12.02	12.21	12.13	12.09	0-1	0
	50	25	12.15	12.34	12.13	12.12		0
	50	50	12.13	12.33	12.14	12.25		0
16QAM	100	0	12.10	12.24	12.18	12.04	0-1	0
	1	0	12.54	12.55	12.46	12.42		0
	1	50	12.66	12.62	12.58	12.41		0
	1	99	12.66	12.65	12.45	12.32	0-2	0
	50	0	12.43	12.47	12.42	12.24		0
	50	25	12.46	12.51	12.41	12.27		0
64QAM	50	50	12.45	12.50	12.39	12.27	0-2	0
	100	0	12.41	12.49	12.39	12.26		0
	1	0	12.53	12.52	12.52	12.43		0-3
	1	50	12.60	12.67	12.52	12.41	0	
	1	99	12.65	12.52	12.46	12.39	0	
	50	0	12.44	12.47	12.38	12.25	0-3	0
256QAM	50	25	12.45	12.48	12.41	12.29		0
	50	50	12.46	12.51	12.41	12.28		0
	100	0	12.41	12.50	12.40	12.27	0-5	0
	1	0	12.56	12.50	12.53	12.41		0
	1	50	12.66	12.65	12.49	12.43		0
	1	99	12.64	12.52	12.47	12.38		0
50	0	12.41	12.46	12.40	12.27	0		
50	25	12.46	12.48	12.38	12.30	0		
256QAM	50	50	12.46	12.51	12.37	12.27	0	
	100	0	12.43	12.48	12.39	12.24	0	

Table 8-62
LTE Band 48 Antenna 4 Uplink Carrier Aggregation Measured P_{Limit}

Combination	PCC								SCC					Power		
	PCC Band	PCC Bandwidth [MHz]	PCC (UL/DL) Channel	PCC (UL/DL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL/DL) Channel	SCC (UL/DL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_48C	LTE B48	20	56207	3646.7	QPSK	50	50	LTE B48	20	56405	3666.5	QPSK	50	0	12.07	12.14

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 105 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Notes:

1. This device supports uplink carrier aggregation for LTE CA_7C, LTE CA_5B, LTE CA_41C and LTE CA_48C with a maximum of two component carriers. For intra-band contiguous carrier aggregation scenarios, 3GPP 36.101 Table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when non-contiguous RB allocation is implemented. The conducted powers and MPR settings in this device are permanently implemented per the above 3GPP requirements.
2. Per FCC Guidance, the output power with uplink CA active was measured for the configuration with the highest reported SAR with single carrier for each exposure condition. The power was measured with wideband signal integration over both component carriers.



Figure 8-2
Power Measurement Setup

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 106 of 255

REV 25.0
10/16/2024

8.3 NR Plimit Conducted Powers

Notes: Per October 2020 TCB Workshop Guidance, NR FR1 SAR evaluations are being generally based on adapting the existing LTE SAR procedures (FCC KDB Publication 941225 D05v02r05). Therefore, NR SAR for the lower bandwidths was not required for testing based on the measured output power and the reported NR SAR for the highest bandwidth. Lower bandwidth conducted powers for all NR bands can be found in the LTE and NR Lower Bandwidth RF Conducted Powers Appendix.

8.3.1 NR Band n71

Table 8-63
NR Band n71 Measured P_{Limit} Antenna 2 - 20 MHz Bandwidth

NR Band n71 20 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			136100 (680.5 MHz) Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	20.57	0	0.0
	1	53	20.58		0.0
	1	104	20.64		0.0
	50	0	20.53	0-1	0.0
	50	28	20.55	0	0.0
	50	56	20.57	0-1	0.0
	100	0	20.56		0.0
DFT-s-OFDM 16QAM	1	1	20.51	0-1	0.0
CP-OFDM QPSK	1	1	20.30	0-1.5	0.0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 107 of 255

REV 25.0
10/16/2024

Table 8-64
NR Band n71 Measured P_{Limit} Antenna 4 - 20 MHz Bandwidth

NR Band n71 20 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			136100 (680.5 MHz) Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	20.02	0	0.0
	1	53	20.28		0.0
	1	104	20.25		0.0
	50	0	20.08	0-1	0.0
	50	28	20.31	0	0.0
	50	56	20.25	0-1	0.0
	100	0	20.22		0.0
DFT-s-OFDM 16QAM	1	1	20.30	0-1	0.0
CP-OFDM QPSK	1	1	20.34	0-1.5	0.0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 108 of 255

REV 25.0
10/16/2024

8.3.2

NR Band n12

Table 8-65
NR Band n12 Measured P_{Limit} Antenna 2 - 15 MHz Bandwidth

NR Band n12 15 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			141500 (707.5 MHz)		
			Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	19.36	0	0.0
	1	40	19.28		0.0
	1	77	19.22		0.0
	36	0	19.35	0-1	0.0
	36	22	19.20	0	0.0
	36	43	19.21	0-1	0.0
	75	0	19.29		0.0
DFT-s-OFDM 16QAM	1	1	19.36	0-1	0.0
CP-OFDM QPSK	1	1	19.42	0-1.5	0.0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 109 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-66
NR Band n12 Measured P_{Limit} Antenna 4 - 15 MHz Bandwidth

NR Band n12 15 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			141500 (707.5 MHz)		
			Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	18.79	0	0.0
	1	40	18.69		0.0
	1	77	18.58		0.0
	36	0	18.70	0-1	0.0
	36	22	18.61	0	0.0
	36	43	18.69	0-1	0.0
	75	0	18.60		0.0
DFT-s-OFDM 16QAM	1	1	18.80	0-1	0.0
CP-OFDM QPSK	1	1	18.78	0-1.5	0.0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 110 of 255

REV 25.0
10/16/2024

8.3.3

NR Band n14

Table 8-67
NR Band n14 Measured P_{Limit} Antenna 2 - 10 MHz Bandwidth

NR Band n14 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			158600 (793 MHz)		
			Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	19.22	0	0.0
	1	26	19.36		0.0
	1	50	19.44		0.0
	25	0	19.39	0-1	0.0
	25	14	19.31	0	0.0
	25	27	19.26	0-1	0.0
	50	0	19.28		0.0
DFT-s-OFDM 16QAM	1	1	19.23	0-1	0.0
CP-OFDM QPSK	1	1	19.41	0-1.5	0.0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 111 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-68
NR Band n14 Measured P_{Limit} Antenna 4 - 10 MHz Bandwidth

NR Band n14 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			158600 (793 MHz)		
			Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	20.77	0	0.0
	1	26	20.75		0.0
	1	50	20.72		0.0
	25	0	20.79	0-1	0.0
	25	14	20.67	0	0.0
	25	27	20.65	0-1	0.0
	50	0	20.69		0.0
DFT-s-OFDM 16QAM	1	1	20.62	0-1	0.0
CP-OFDM QPSK	1	1	20.74	0-1.5	0.0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 112 of 255

REV 25.0
10/16/2024

8.3.4

NR Band n26

Table 8-69
NR Band n26 Measured P_{Limit} Antenna 2 - 20 MHz Bandwidth

NR Band n26 20 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			166300 (831.5 MHz)		
			Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	19.04	0	0.0
	1	53	19.02		0.0
	1	104	18.99		0.0
	50	0	19.01	0-1	0.0
	50	28	19.06	0	0.0
	50	56	18.94	0-1	0.0
	100	0	19.03		0.0
DFT-s-OFDM 16QAM	1	1	19.01	0-1	0.0
CP-OFDM QPSK	1	1	18.98	0-1.5	0.0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 113 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-70
NR Band n26 Measured P_{Limit} Antenna 4 - 20 MHz Bandwidth

NR Band n26 20 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			166300 (831.5 MHz) Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	19.04	0	0.0
	1	53	19.18		0.0
	1	104	18.96		0.0
	50	0	19.12	0-1	0.0
	50	28	19.09	0	0.0
	50	56	18.97	0-1	0.0
	100	0	19.08		0.0
DFT-s-OFDM 16QAM	1	1	19.14	0-1	0.0
CP-OFDM QPSK	1	1	19.17	0-1.5	0.0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 114 of 255

REV 25.0
10/16/2024

8.3.5

NR Band n5

Table 8-71
NR Band n5 Measured P_{Limit} Antenna 2 - 20 MHz Bandwidth

NR Band n5 20 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			167300 (836.5 MHz)		
			Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	19.07	0	0.0
	1	53	18.87		0.0
	1	104	18.78		0.0
	50	0	19.03	0-1	0.0
	50	28	18.94	0	0.0
	50	56	18.87	0-1	0.0
	100	0	18.97		0.0
DFT-s-OFDM 16QAM	1	1	19.11	0-1	0.0
CP-OFDM QPSK	1	1	19.04	0-1.5	0.0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 115 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-72
NR Band n5 Measured P_{Limit} Antenna 4 - 20 MHz Bandwidth

NR Band n5 20 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			167300 (836.5 MHz)		
			Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	19.32	0	0.0
	1	53	19.25		0.0
	1	104	19.14		0.0
	50	0	19.21	0-1	0.0
	50	28	19.11	0	0.0
	50	56	19.01	0-1	0.0
	100	0	19.09		0.0
DFT-s-OFDM 16QAM	1	1	19.20	0-1	0.0
CP-OFDM QPSK	1	1	19.31	0-1.5	0.0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 116 of 255

REV 25.0
10/16/2024

8.3.6

NR Band n70

Table 8-73
NR Band n70 Measured P_{Limit} Antenna 1b - 15 MHz Bandwidth

NR Band n70 15 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			340500 (1702.5 MHz)		
			Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	12.04	0	0.0
	1	40	11.89		0.0
	1	77	11.84		0.0
	36	0	12.03	0-1	0.0
	36	22	11.92	0	0.0
	36	43	11.94	0-1	0.0
	75	0	12.01		0.0
DFT-s-OFDM 16QAM	1	1	11.87	0-1	0.0
CP-OFDM QPSK	1	1	12.10	0-1.5	0.0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 117 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-74
NR Band n70 Measured P_{Limit} Antenna 2 - 15 MHz Bandwidth

NR Band n70 15 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			340500 (1702.5 MHz)		
			Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	14.99	0	0.0
	1	40	15.05		0.0
	1	77	15.02		0.0
	36	0	15.01	0-1	0.0
	36	22	14.95	0	0.0
	36	43	15.00	0-1	0.0
	75	0	15.00		0.0
DFT-s-OFDM 16QAM	1	1	15.19	0-1	0.0
CP-OFDM QPSK	1	1	14.98	0-1.5	0.0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 118 of 255

REV 25.0
10/16/2024

Table 8-75
NR Band n70 Measured P_{Limit} Antenna 3b - 15 MHz Bandwidth

NR Band n70 15 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			340500 (1702.5 MHz)		
			Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	11.88	0	0.0
	1	40	11.78		0.0
	1	77	11.81		0.0
	36	0	11.84	0-1	0.0
	36	22	11.83	0	0.0
	36	43	11.80	0-1	0.0
	75	0	11.79		0.0
DFT-s-OFDM 16QAM	1	1	11.82	0-1	0.0
CP-OFDM QPSK	1	1	11.87	0-1.5	0.0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 119 of 255

REV 25.0
10/16/2024

Table 8-76
NR Band n70 Measured P_{Limit} Antenna 4 - 15 MHz Bandwidth

NR Band n70 15 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			340500 (1702.5 MHz)		
			Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	15.20	0	0.0
	1	40	15.18		0.0
	1	77	15.14		0.0
	36	0	15.17	0-1	0.0
	36	22	15.19	0	0.0
	36	43	15.12	0-1	0.0
	75	0	15.15		0.0
DFT-s-OFDM 16QAM	1	1	15.13	0-1	0.0
CP-OFDM QPSK	1	1	15.17	0-1.5	0.0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 120 of 255

REV 25.0
10/16/2024

8.3.7

NR Band n66

Table 8-77
NR Band n66 Measured P_{Limit} Antenna 1b - 40 MHz Bandwidth

NR Band n66 40 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			349000 (1745 MHz)		
			Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	12.15	0	0.0
	1	108	12.10		0.0
	1	214	12.13		0.0
	108	0	12.24	0-1	0.0
	108	54	12.19	0	0.0
	108	108	12.16	0-1	0.0
	216	0	12.06		0.0
DFT-s-OFDM 16QAM	1	1	11.90	0-1	0.0
CP-OFDM QPSK	1	1	11.99	0-1.5	0.0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 121 of 255

REV 25.0
10/16/2024

Table 8-78
NR Band n66 Measured P_{Limit} Antenna 2 - 40 MHz Bandwidth

NR Band n66 40 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			349000 (1745 MHz)		
			Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	15.25	0	0.0
	1	108	15.18		0.0
	1	214	15.20		0.0
	108	0	15.28	0-1	0.0
	108	54	15.16	0	0.0
	108	108	15.21	0-1	0.0
	216	0	15.18		0.0
DFT-s-OFDM 16QAM	1	1	15.20	0-1	0.0
CP-OFDM QPSK	1	1	15.25	0-1.5	0.0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 122 of 255

REV 25.0
10/16/2024

Table 8-79
NR Band n66 Measured P_{Limit} Antenna 3b - 40 MHz Bandwidth

NR Band n66 40 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			349000 (1745 MHz)		
			Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	11.78	0	0.0
	1	108	11.74		0.0
	1	214	11.71		0.0
	108	0	11.99	0-1	0.0
	108	54	11.81	0	0.0
	108	108	11.75	0-1	0.0
	216	0	11.77		0.0
DFT-s-OFDM 16QAM	1	1	11.82	0-1	0.0
CP-OFDM QPSK	1	1	11.79	0-1.5	0.0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 123 of 255

REV 25.0
10/16/2024

Table 8-80
NR Band n66 Measured P_{Limit} Antenna 4 - 40 MHz Bandwidth

NR Band n66 40 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			349000 (1745 MHz)		
			Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	14.68	0	0.0
	1	108	14.51		0.0
	1	214	14.71		0.0
	108	0	14.86	0-1	0.0
	108	54	14.53	0	0.0
	108	108	14.61	0-1	0.0
	216	0	14.58		0.0
DFT-s-OFDM 16QAM	1	1	14.50	0-1	0.0
CP-OFDM QPSK	1	1	14.73	0-1.5	0.0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 124 of 255

REV 25.0
10/16/2024

8.3.8

NR Band n25

Table 8-81
NR Band n25 Measured P_{Limit} Antenna 1b - 40 MHz Bandwidth

NR Band n25 40 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			376500 (1882.5 MHz)		
			Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	11.76	0	0.0
	1	108	11.80		0.0
	1	214	11.92		0.0
	108	0	11.97	0-1	0.0
	108	54	11.85	0	0.0
	108	108	11.79	0-1	0.0
	216	0	11.83		0.0
DFT-s-OFDM 16QAM	1	1	11.89	0-1	0.0
CP-OFDM QPSK	1	1	11.81	0-1.5	0.0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 125 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-82
NR Band n25 Measured P_{Limit} Antenna 2 - 40 MHz Bandwidth

NR Band n25 40 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			376500 (1882.5 MHz)		
			Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	15.25	0	0.0
	1	108	15.18		0.0
	1	214	15.31		0.0
	108	0	15.35	0-1	0.0
	108	54	15.26	0	0.0
	108	108	15.20	0-1	0.0
	216	0	15.22		0.0
DFT-s-OFDM 16QAM	1	1	15.30	0-1	0.0
CP-OFDM QPSK	1	1	15.34	0-1.5	0.0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 126 of 255

REV 25.0
10/16/2024

Table 8-83
NR Band n25 Measured P_{Limit} Antenna 3b - 40 MHz Bandwidth

NR Band n25 40 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			376500 (1882.5 MHz)		
			Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	11.97	0	0.0
	1	108	12.06		0.0
	1	214	12.03		0.0
	108	0	12.01	0-1	0.0
	108	54	12.06	0	0.0
	108	108	12.07	0-1	0.0
	216	0	11.99		0.0
DFT-s-OFDM 16QAM	1	1	12.09	0-1	0.0
CP-OFDM QPSK	1	1	12.03	0-1.5	0.0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 127 of 255

REV 25.0
10/16/2024

Table 8-84
NR Band n25 Measured P_{Limit} Antenna 4 - 40 MHz Bandwidth
NR Band n25
40 MHz Bandwidth

NR Band n25 40 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			376500 (1882.5 MHz) Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	13.15	0	0.0
	1	108	13.17		0.0
	1	214	13.13		0.0
	108	0	13.05	0-1	0.0
	108	54	13.15	0	0.0
	108	108	13.11	0-1	0.0
	216	0	13.05		0.0
DFT-s-OFDM 16QAM	1	1	13.20	0-1	0.0
CP-OFDM QPSK	1	1	13.05	0-1.5	0.0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 128 of 255

REV 25.0
10/16/2024

8.3.9

NR Band n30

Table 8-85
NR Band n30 Measured P_{Limit} Antenna 1b - 10 MHz Bandwidth

NR Band n30 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			462000 (2310 MHz) Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	11.80	0	0.0
	1	26	11.81		0.0
	1	50	11.85		0.0
	25	0	11.82	0-1	0.0
	25	14	11.83	0	0.0
	25	27	11.78	0-1	0.0
	50	0	11.80		0.0
DFT-s-OFDM 16QAM	1	1	12.03	0-1	0.0
CP-OFDM QPSK	1	1	12.15	0-1.5	0.0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 129 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-86
NR Band n30 Measured P_{Limit} Antenna 2 - 10 MHz Bandwidth

NR Band n30 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			462000 (2310 MHz)		
			Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	12.18	0	0.0
	1	26	12.34		0.0
	1	50	12.24		0.0
	25	0	12.29	0-1	0.0
	25	14	12.31	0	0.0
	25	27	12.22	0-1	0.0
	50	0	12.29		0.0
DFT-s-OFDM 16QAM	1	1	12.36	0-1	0.0
CP-OFDM QPSK	1	1	12.16	0-1.5	0.0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 130 of 255

REV 25.0
10/16/2024

Table 8-87
NR Band n30 Measured P_{Limit} Antenna 3b - 10 MHz Bandwidth

NR Band n30 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			462000 (2310 MHz)		
			Conducted Power [dBm]		
DFT-S-OFDM QPSK	1	1	12.19	0	0.0
	1	26	12.26		0.0
	1	50	12.29		0.0
	25	0	12.21	0-1	0.0
	25	14	12.23	0	0.0
	25	27	12.15	0-1	0.0
	50	0	12.19		0.0
DFT-S-OFDM 16QAM	1	1	11.86	0-1	0.0
CP-OFDM QPSK	1	1	12.15	0-1.5	0.0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 131 of 255

REV 25.0
10/16/2024

Table 8-88
NR Band n30 Measured P_{Limit} Antenna 4 - 10 MHz Bandwidth

NR Band n30 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			462000 (2310 MHz)		
			Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	13.13	0	0.0
	1	26	13.10		0.0
	1	50	13.17		0.0
	25	0	13.07	0-1	0.0
	25	14	13.12	0	0.0
	25	27	13.06	0-1	0.0
	50	0	13.04		0.0
DFT-s-OFDM 16QAM	1	1	12.93	0-1	0.0
CP-OFDM QPSK	1	1	12.89	0-1.5	0.0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 132 of 255

REV 25.0
10/16/2024

8.3.10

NR Band n7

Table 8-89
NR Band n7 Measured P_{Limit} Antenna 1b - 40 MHz Bandwidth

NR Band n7 40 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			507000 (2535 MHz)		
			Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	11.83	0	0.0
	1	108	11.92		0.0
	1	214	11.72		0.0
	108	0	11.80	0-1	0.0
	108	54	11.75	0	0.0
	108	108	11.90	0-1	0.0
	216	0	11.80		0.0
DFT-s-OFDM 16QAM	1	1	12.20	0-1	0.0
CP-OFDM QPSK	1	1	11.91	0-1.5	0.0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 133 of 255

REV 25.0
10/16/2024

Table 8-90
NR Band n7 Measured P_{Limit} Antenna 2 - 40 MHz Bandwidth

NR Band n7 40 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			507000 (2535 MHz)		
			Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	11.68	0	0.0
	1	108	11.42		0.0
	1	214	11.43		0.0
	108	0	11.63	0-1	0.0
	108	54	11.48	0	0.0
	108	108	11.61	0-1	0.0
	216	0	11.45		0.0
DFT-s-OFDM 16QAM	1	1	11.76	0-1	0.0
CP-OFDM QPSK	1	1	11.67	0-1.5	0.0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 134 of 255

REV 25.0
10/16/2024

Table 8-91
NR Band n7 Measured P_{Limit} Antenna 3b - 40 MHz Bandwidth

NR Band n7 40 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			507000 (2535 MHz)		
			Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	11.41	0	0.0
	1	108	11.48		0.0
	1	214	11.49		0.0
	108	0	11.46	0-1	0.0
	108	54	11.36	0	0.0
	108	108	11.42	0-1	0.0
	216	0	11.39		0.0
DFT-s-OFDM 16QAM	1	1	11.60	0-1	0.0
CP-OFDM QPSK	1	1	11.52	0-1.5	0.0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 135 of 255

REV 25.0
10/16/2024

Table 8-92
NR Band n7 Measured P_{Limit} Antenna 4 - 40 MHz Bandwidth

NR Band n7 40 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			507000 (2535 MHz)		
			Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	10.60	0	0.0
	1	108	10.67		0.0
	1	214	10.61		0.0
	108	0	10.50	0-1	0.0
	108	54	10.49	0	0.0
	108	108	10.61	0-1	0.0
	216	0	10.54		0.0
DFT-s-OFDM 16QAM	1	1	10.52	0-1	0.0
CP-OFDM QPSK	1	1	10.61	0-1.5	0.0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 136 of 255

REV 25.0
10/16/2024

8.3.11

NR Band n41

Table 8-93
NR Band n41 Measured P_{Limit} Antenna 1b - 100 MHz Bandwidth

NR Band n41 100 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			518598 (2592.99 MHz)		
			Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	12.01	0	0.0
	1	137	12.15		0.0
	1	271	11.98		0.0
	135	0	11.97	0-1	0.0
	135	69	12.06	0	0.0
	135	138	11.99	0-1	0.0
	270	0	12.03		0.0
DFT-s-OFDM 16QAM	1	1	12.01	0-1	0.0
CP-OFDM QPSK	1	1	11.94	0-1.5	0.0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 137 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-94
NR Band n41 Measured P_{Limit} Antenna 2 - 100 MHz Bandwidth

NR Band n41 100 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			518598 (2592.99 MHz)		
			Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	12.32	0	0.0
	1	137	12.33		0.0
	1	271	12.42		0.0
	135	0	12.29	0-1	0.0
	135	69	12.27	0	0.0
	135	138	12.26	0-1	0.0
	270	0	12.28		0.0
DFT-s-OFDM 16QAM	1	1	12.16	0-1	0.0
CP-OFDM QPSK	1	1	12.26	0-1.5	0.0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 138 of 255

REV 25.0
10/16/2024

Table 8-95
NR Band n41 Measured P_{Limit} Antenna 3b - 100 MHz Bandwidth

NR Band n41 100 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			518598 (2592.99 MHz)		
			Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	11.69	0	0.0
	1	137	11.78		0.0
	1	271	11.71		0.0
	135	0	11.72	0-1	0.0
	135	69	11.75	0	0.0
	135	138	11.70	0-1	0.0
	270	0	11.71		0.0
DFT-s-OFDM 16QAM	1	1	11.34	0-1	0.0
CP-OFDM QPSK	1	1	11.43	0-1.5	0.0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 139 of 255

REV 25.0
10/16/2024

Table 8-96
NR Band n41 Measured P_{Limit} Antenna 4 - 100 MHz Bandwidth

NR Band n41 100 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			518598 (2592.99 MHz)		
			Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	10.20	0	0.0
	1	137	10.26		0.0
	1	271	10.12		0.0
	135	0	10.27	0-1	0.0
	135	69	10.19	0	0.0
	135	138	10.14	0-1	0.0
	270	0	10.17		0.0
DFT-s-OFDM 16QAM	1	1	10.40	0-1	0.0
CP-OFDM QPSK	1	1	10.18	0-1.5	0.0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 140 of 255

REV 25.0
10/16/2024

8.3.12

NR Band n48

Table 8-97
NR Band n48 Measured P_{Limit} Antenna 1a - 40 MHz Bandwidth

NR Band n48 40 MHz Bandwidth							
			Channel			MPR Allowed per 3GPP [dB]	MPR [dB]
Modulation	RB Size	RB Offset	638000 (3570 MHz)	641666 (3624.99 MHz)	645332 (3679.98 MHz)		
			Conducted Power [dBm]				
DFT-s-OFDM QPSK	1	1	9.19	9.35	9.24	0	0.0
	1	53	9.33	9.29	9.14		0.0
	1	104	9.35	9.51	9.12		0.0
	50	0	9.21	9.40	9.27	0-1	0.0
	50	28	9.24	9.26	9.19	0	0.0
	50	56	9.35	9.21	9.09	0-1	0.0
	100	0	9.22	9.32	9.16		0.0
DFT-s-OFDM 16QAM	1	1	9.35	9.45	9.50	0-1	0.0
CP-OFDM QPSK	1	1	9.16	9.36	9.20	0-1.5	0.0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 141 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-98
NR Band n48 Measured P_{Limit} Antenna 2 - 40 MHz Bandwidth
NR Band n48
40 MHz Bandwidth

			Channel			MPR Allowed per 3GPP [dB]	MPR [dB]
Modulation	RB Size	RB Offset	638000 (3570 MHz)	641666 (3624.99 MHz)	645332 (3679.98 MHz)		
			Conducted Power [dBm]				
DFT-s-OFDM QPSK	1	1	9.27	9.55	9.47	0	0.0
	1	53	9.36	9.48	9.32		0.0
	1	104	9.54	9.50	9.28		0.0
	50	0	9.21	9.60	9.37	0-1	0.0
	50	28	9.30	9.50	9.34	0	0.0
	50	56	9.36	9.48	9.22	0-1	0.0
	100	0	9.30	9.53	9.34		0.0
DFT-s-OFDM 16QAM	1	1	9.26	9.62	9.56	0-1	0.0
CP-OFDM QPSK	1	1	9.31	9.53	9.46	0-1.5	0.0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 142 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-99
NR Band n48 Measured P_{Limit} Antenna 3a - 40 MHz Bandwidth

NR Band n48 40 MHz Bandwidth							
			Channel			MPR Allowed per 3GPP [dB]	MPR [dB]
Modulation	RB Size	RB Offset	638000 (3570 MHz)	641666 (3624.99 MHz)	645332 (3679.98 MHz)		
			Conducted Power [dBm]				
DFT-s-OFDM QPSK	1	1	9.00	9.14	8.90	0	0.0
	1	53	9.05	9.01	8.88		0.0
	1	104	9.21	8.97	8.81		0.0
	50	0	9.00	9.07	8.87	0-1	0.0
	50	28	9.05	8.96	8.85	0	0.0
	50	56	9.10	8.94	8.83	0-1	0.0
	100	0	9.01	8.97	8.83		0.0
DFT-s-OFDM 16QAM	1	1	9.02	9.14	8.96	0-1	0.0
CP-OFDM QPSK	1	1	9.20	9.10	8.95	0-1.5	0.0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 143 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-100
NR Band n48 Measured P_{Limit} Antenna 4 - 40 MHz Bandwidth
NR Band n48
40 MHz Bandwidth

			Channel			MPR Allowed per 3GPP [dB]	MPR [dB]
Modulation	RB Size	RB Offset	638000 (3570 MHz)	641666 (3624.99 MHz)	645332 (3679.98 MHz)		
			Conducted Power [dBm]				
DFT-s-OFDM QPSK	1	1	10.35	10.59	10.62	0	0.0
	1	53	10.40	10.57	10.60		0.0
	1	104	10.61	10.54	10.51		0.0
	50	0	10.38	10.62	10.65	0-1	0.0
	50	28	10.36	10.50	10.55	0	0.0
	50	56	10.53	10.53	10.49	0-1	0.0
	100	0	10.35	10.58	10.54		0.0
DFT-s-OFDM 16QAM	1	1	10.41	10.68	10.51	0-1	0.0
CP-OFDM QPSK	1	1	10.35	10.65	10.60	0-1.5	0.0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 144 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

8.3.13

NR Band n77 C-Band

Table 8-101

NR Band n77 C-Band Measured P_{Limit} Antenna 1a - 100 MHz Bandwidth

NR Band n77 100 MHz Bandwidth						
			Channel		MPR Allowed per 3GPP [dB]	MPR [dB]
Modulation	RB Size	RB Offset	650000 (3750 MHz)	662000 (3930 MHz)		
			Conducted Power [dBm]			
DFT-s-OFDM QPSK	1	1	8.95	9.30	0	0.0
	1	137	9.01	9.07		0.0
	1	271	9.23	8.90		0.0
	135	0	9.02	9.14	0-1	0.0
	135	69	9.03	8.97	0	0.0
	135	138	9.01	8.90	0-1	0.0
	270	0	9.01	9.07		0.0
DFT-s-OFDM 16QAM	1	1	9.12	9.28	0-1	0.0
CP-OFDM QPSK	1	1	9.05	9.14	0-1.5	0.0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 145 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-102
NR Band n77 C-Band Measured P_{Limit} Antenna 2 - 100 MHz Bandwidth

NR Band n77 100 MHz Bandwidth						
			Channel		MPR Allowed per 3GPP [dB]	MPR [dB]
Modulation	RB Size	RB Offset	650000 (3750 MHz)	662000 (3930 MHz)		
			Conducted Power [dBm]			
DFT-s-OFDM QPSK	1	1	8.17	8.14	0	0.0
	1	137	8.40	8.29		0.0
	1	271	8.19	8.21		0.0
	135	0	8.20	8.14	0-1	0.0
	135	69	8.39	8.20	0	0.0
	135	138	8.23	8.11	0-1	0.0
	270	0	8.24	8.01		0.0
DFT-s-OFDM 16QAM	1	1	8.11	8.14	0-1	0.0
CP-OFDM QPSK	1	1	8.05	8.15	0-1.5	0.0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 146 of 255

REV 25.0
10/16/2024

Table 8-103
NR Band n77 C-Band Measured P_{Limit} Antenna 3a - 100 MHz Bandwidth

NR Band n77 100 MHz Bandwidth						
			Channel		MPR Allowed per 3GPP [dB]	MPR [dB]
Modulation	RB Size	RB Offset	650000 (3750 MHz)	662000 (3930 MHz)		
			Conducted Power [dBm]			
DFT-s-OFDM QPSK	1	1	7.83	7.90	0	0.0
	1	137	7.94	7.97		0.0
	1	271	7.74	7.92		0.0
	135	0	7.80	7.95	0-1	0.0
	135	69	7.90	7.96	0	0.0
	135	138	7.88	7.91	0-1	0.0
	270	0	7.87	7.94		0.0
DFT-s-OFDM 16QAM	1	1	7.60	7.86	0-1	0.0
CP-OFDM QPSK	1	1	7.64	7.70	0-1.5	0.0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 147 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-104
NR Band n77 C-Band Measured P_{Limit} Antenna 4 - 100 MHz Bandwidth

NR Band n77 100 MHz Bandwidth						
			Channel		MPR Allowed per 3GPP [dB]	MPR [dB]
Modulation	RB Size	RB Offset	650000 (3750 MHz)	662000 (3930 MHz)		
			Conducted Power [dBm]			
DFT-s-OFDM QPSK	1	1	10.17	10.20	0	0.0
	1	137	10.10	10.21		0.0
	1	271	10.14	10.15		0.0
	135	0	10.19	10.20	0-1	0.0
	135	69	10.16	10.19	0	0.0
	135	138	10.08	10.14	0-1	0.0
	270	0	10.11	10.19		0.0
DFT-s-OFDM 16QAM	1	1	10.35	10.37	0-1	0.0
CP-OFDM QPSK	1	1	10.03	10.22	0-1.5	0.0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 148 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

8.3.14

NR Band n77 DoD

Table 8-105

NR Band n77 DoD Measured P_{Limit} Antenna 1a - 100 MHz Bandwidth

NR Band n77 DoD 100 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			633334 (3500.01 MHz)		
			Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	8.96	0	0.0
	1	137	8.88		0.0
	1	271	9.20		0.0
	135	0	8.90	0-1	0.0
	135	69	8.92	0	0.0
	135	138	9.01	0-1	0.0
	270	0	8.91		0.0
DFT-s-OFDM 16QAM	1	1	9.18	0-1	0.0
CP-OFDM QPSK	1	1	8.85	0-1.5	0.0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 149 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-106
NR Band n77 DoD Measured P_{Limit} Antenna 2 - 100 MHz Bandwidth

NR Band n77 DoD 100 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			633334 (3500.01 MHz)		
			Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	8.15	0	0.0
	1	137	8.24		0.0
	1	271	8.26		0.0
	135	0	8.16	0-1	0.0
	135	69	8.25	0	0.0
	135	138	8.22	0-1	0.0
	270	0	8.24		0.0
DFT-s-OFDM 16QAM	1	1	8.04	0-1	0.0
CP-OFDM QPSK	1	1	8.01	0-1.5	0.0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 150 of 255

REV 25.0
10/16/2024

Table 8-107
NR Band n77 DoD Measured P_{Limit} Antenna 3a - 100 MHz Bandwidth
NR Band n77 DoD
100 MHz Bandwidth

			Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
Modulation	RB Size	RB Offset	633334 (3500.01 MHz) Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	8.00	0	0.0
	1	137	8.05		0.0
	1	271	8.16		0.0
	135	0	8.04	0-1	0.0
	135	69	8.01	0	0.0
	135	138	8.09	0-1	0.0
	270	0	8.02		0.0
DFT-s-OFDM 16QAM	1	1	8.06	0-1	0.0
CP-OFDM QPSK	1	1	7.74	0-1.5	0.0

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 151 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-108
NR Band n77 DoD Measured P_{Limit} Antenna 4 - 100 MHz Bandwidth

NR Band n77 DoD 100 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			633334 (3500.01 MHz)		
			Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	10.11	0	0.0
	1	137	10.21		0.0
	1	271	10.23		0.0
	135	0	10.20	0-1	0.0
	135	69	10.23	0	0.0
	135	138	10.13	0-1	0.0
	270	0	10.17		0.0
DFT-s-OFDM 16QAM	1	1	10.34	0-1	0.0
CP-OFDM QPSK	1	1	10.00	0-1.5	0.0

Some bands do not support non-overlapping channels. Per FCC Guidance, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

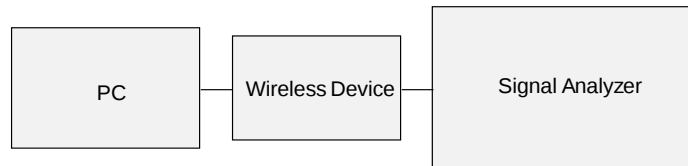


Figure 8-3
Power Measurement Setup

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 152 of 255

REV 25.0
10/16/2024

8.4 2.4 GHz WLAN Maximum Time-Averaged Conducted Powers

Table 8-109
2.4 GHz WLAN Maximum Average RF Power – Antenna 1a, Variant 1

2.4GHz WIFI (20MHz 802.11b SISO)		
Freq. [MHz]	Channel	Conducted Power [dBm]
2412	1	10.32
2437	6	10.34
2462	11	10.33
2.4GHz WIFI (20MHz 802.11g SISO)		
Freq. [MHz]	Channel	Conducted Power [dBm]
2412	1	10.23
2437	6	10.29
2462	11	10.23
2.4GHz WIFI (20MHz 802.11n SISO)		
Freq. [MHz]	Channel	Conducted Power [dBm]
2412	1	10.19
2437	6	10.30
2462	11	10.22
2.4GHz WIFI (20MHz 802.11ax SISO)		
Freq. [MHz]	Channel	Conducted Power [dBm]
2412	1	10.35
2437	6	10.26
2462	11	10.13

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 153 of 255

REV 25.0
10/16/2024

Table 8-110
2.4 GHz WLAN Maximum Average RF Power – Antenna 1a, Variant 2

2.4GHz WIFI (20MHz 802.11b SISO)		
Freq. [MHz]	Channel	Conducted Power [dBm]
2412	1	10.33
2437	6	10.32
2462	11	10.30
2.4GHz WIFI (20MHz 802.11g SISO)		
Freq. [MHz]	Channel	Conducted Power [dBm]
2412	1	10.23
2437	6	10.39
2462	11	10.17
2.4GHz WIFI (20MHz 802.11n SISO)		
Freq. [MHz]	Channel	Conducted Power [dBm]
2412	1	10.22
2437	6	10.18
2462	11	10.28
2.4GHz WIFI (20MHz 802.11ax SISO)		
Freq. [MHz]	Channel	Conducted Power [dBm]
2412	1	10.35
2437	6	10.34
2462	11	10.30

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 154 of 255

REV 25.0
10/16/2024

Table 8-111
2.4 GHz WLAN Maximum Average RF Power – Antenna 3a, Variant 1

2.4GHz WIFI (20MHz 802.11b SISO)		
Freq. [MHz]	Channel	Conducted Power [dBm]
2412	1	10.33
2437	6	10.36
2462	11	10.08
2.4GHz WIFI (20MHz 802.11g SISO)		
Freq. [MHz]	Channel	Conducted Power [dBm]
2412	1	10.07
2437	6	9.99
2462	11	9.90
2.4GHz WIFI (20MHz 802.11n SISO)		
Freq. [MHz]	Channel	Conducted Power [dBm]
2412	1	9.97
2437	6	10.12
2462	11	9.86
2.4GHz WIFI (20MHz 802.11ax SISO)		
Freq. [MHz]	Channel	Conducted Power [dBm]
2412	1	9.86
2437	6	10.09
2462	11	9.99

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 155 of 255

REV 25.0
10/16/2024

Table 8-112
2.4 GHz WLAN Maximum Average RF Power – Antenna 3a, Variant 2

2.4GHz WIFI (20MHz 802.11b SISO)		
Freq. [MHz]	Channel	Conducted Power [dBm]
2412	1	10.39
2437	6	10.35
2462	11	10.34
2.4GHz WIFI (20MHz 802.11g SISO)		
Freq. [MHz]	Channel	Conducted Power [dBm]
2412	1	10.01
2437	6	10.07
2462	11	9.88
2.4GHz WIFI (20MHz 802.11n SISO)		
Freq. [MHz]	Channel	Conducted Power [dBm]
2412	1	9.85
2437	6	10.00
2462	11	9.84
2.4GHz WIFI (20MHz 802.11ax SISO)		
Freq. [MHz]	Channel	Conducted Power [dBm]
2412	1	9.96
2437	6	10.21
2462	11	10.01

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 156 of 255

REV 25.0
10/16/2024

8.5 2.4 GHz WLAN Reduced Time-Averaged Conducted Powers

Table 8-113
2.4 GHz WLAN 6 dB Reduced Average RF Power – Antenna 1a, Variant 1

2.4GHz WIFI (20MHz 802.11b SISO)		
Freq. [MHz]	Channel	Conducted Power [dBm]
2412	1	4.32
2437	6	4.43
2462	11	4.38
2.4GHz WIFI (20MHz 802.11g SISO)		
Freq. [MHz]	Channel	Conducted Power [dBm]
2412	1	4.14
2437	6	4.32
2462	11	4.23
2.4GHz WIFI (20MHz 802.11n SISO)		
Freq. [MHz]	Channel	Conducted Power [dBm]
2412	1	4.15
2437	6	4.33
2462	11	4.19
2.4GHz WIFI (20MHz 802.11ax SISO)		
Freq. [MHz]	Channel	Conducted Power [dBm]
2412	1	4.07
2437	6	4.15
2462	11	4.11

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 157 of 255

REV 25.0
10/16/2024

Table 8-114
2.4 GHz WLAN 6 dB Reduced Average RF Power – Antenna 1a, Variant 2

2.4GHz WIFI (20MHz 802.11b SISO)		
Freq. [MHz]	Channel	Conducted Power [dBm]
2412	1	4.14
2437	6	4.08
2462	11	4.23
2.4GHz WIFI (20MHz 802.11g SISO)		
Freq. [MHz]	Channel	Conducted Power [dBm]
2412	1	4.14
2437	6	4.28
2462	11	4.33
2.4GHz WIFI (20MHz 802.11n SISO)		
Freq. [MHz]	Channel	Conducted Power [dBm]
2412	1	4.11
2437	6	4.20
2462	11	4.31
2.4GHz WIFI (20MHz 802.11ax SISO)		
Freq. [MHz]	Channel	Conducted Power [dBm]
2412	1	4.04
2437	6	4.32
2462	11	4.14

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 158 of 255

REV 25.0
10/16/2024

Table 8-115
2.4 GHz WLAN 6 dB Reduced Average RF Power – Antenna 3a, Variant 1

2.4GHz WIFI (20MHz 802.11b SISO)		
Freq. [MHz]	Channel	Conducted Power [dBm]
2412	1	4.02
2437	6	3.97
2462	11	3.98
2.4GHz WIFI (20MHz 802.11g SISO)		
Freq. [MHz]	Channel	Conducted Power [dBm]
2412	1	4.04
2437	6	4.05
2462	11	3.79
2.4GHz WIFI (20MHz 802.11n SISO)		
Freq. [MHz]	Channel	Conducted Power [dBm]
2412	1	4.02
2437	6	4.09
2462	11	4.10
2.4GHz WIFI (20MHz 802.11ax SISO)		
Freq. [MHz]	Channel	Conducted Power [dBm]
2412	1	4.11
2437	6	4.07
2462	11	4.19

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 159 of 255

REV 25.0
10/16/2024

Table 8-116
2.4 GHz WLAN 6 dB Reduced Average RF Power – Antenna 3a, Variant 2

2.4GHz WIFI (20MHz 802.11b SISO)		
Freq. [MHz]	Channel	Conducted Power [dBm]
2412	1	4.02
2437	6	4.01
2462	11	4.03
2.4GHz WIFI (20MHz 802.11g SISO)		
Freq. [MHz]	Channel	Conducted Power [dBm]
2412	1	4.02
2437	6	4.07
2462	11	3.89
2.4GHz WIFI (20MHz 802.11n SISO)		
Freq. [MHz]	Channel	Conducted Power [dBm]
2412	1	3.98
2437	6	4.06
2462	11	3.97
2.4GHz WIFI (20MHz 802.11ax)		
Freq. [MHz]	Channel	Conducted Power [dBm]
2412	1	3.99
2437	6	4.07
2462	11	3.97

8.6 5 GHz WLAN Maximum Time-Averaged Conducted Powers

Table 8-117
5 GHz WLAN Maximum Average RF Power – Antenna 1b, Variant 1

5GHz WIFI (80MHz 802.11ac SISO)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5210	42	10.23
UNII-2A	5290	58	10.38
UNII-2C	5530	106	9.07
	5610	122	9.17
	5690	138	8.62
UNII-3	5775	155	8.86
5GHz WIFI (80MHz 802.11ax SISO)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5210	42	9.95
UNII-2A	5290	58	9.97
UNII-2C	5530	106	9.48
	5610	122	9.59
	5690	138	9.53
UNII-3	5775	155	8.78

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 160 of 255

REV 25.0
10/16/2024

Table 8-118
5 GHz WLAN Maximum Average RF Power – Antenna 1b, Variant 2

5GHz WIFI (80MHz 802.11ac SISO)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5210	42	10.23
UNII-2A	5290	58	10.30
UNII-2C	5530	106	9.10
	5610	122	9.29
	5690	138	8.67
UNII-3	5775	155	8.81
5GHz WIFI (80MHz 802.11ax SISO)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5210	42	10.02
UNII-2A	5290	58	10.03
UNII-2C	5530	106	9.27
	5610	122	9.56
	5690	138	9.61
UNII-3	5775	155	8.72

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 161 of 255

REV 25.0
10/16/2024

Table 8-119
5 GHz WLAN Maximum Average RF Power – Antenna 3b, Variant 1

5GHz WIFI (80MHz 802.11ac SISO)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5210	42	10.09
UNII-2A	5290	58	10.30
UNII-2C	5530	106	9.01
	5610	122	9.07
	5690	138	9.05
UNII-3	5775	155	9.20
5GHz WIFI (80MHz 802.11ax SISO)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5210	42	9.90
UNII-2A	5290	58	9.93
UNII-2C	5530	106	8.83
	5610	122	8.76
	5690	138	8.76
UNII-3	5775	155	9.53

Table 8-120
5 GHz WLAN Maximum Average RF Power – Antenna 3b, Variant 2

5GHz WIFI (80MHz 802.11ac SISO)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5210	42	10.12
UNII-2A	5290	58	10.03
UNII-2C	5530	106	9.03
	5610	122	8.99
	5690	138	9.06
UNII-3	5775	155	9.16
5GHz WIFI (80MHz 802.11ax SISO)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5210	42	9.91
UNII-2A	5290	58	9.97
UNII-2C	5530	106	8.81
	5610	122	8.65
	5690	138	8.76
UNII-3	5775	155	9.61

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 162 of 255

REV 25.0
10/16/2024

Table 8-121
5 GHz WLAN Maximum Average RF Power – Antenna 5T, Variant 1

5GHz WIFI (40MHz 802.11n SISO)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5190	38	15.53
	5230	46	16.44
UNII-2A	5270	54	16.53
	5310	62	16.29
5GHz WIFI (40MHz 802.11ac SISO)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5190	38	15.35
	5230	46	16.72
UNII-2A	5270	54	16.87
	5310	62	15.92
5GHz WIFI (40MHz 802.11ax SISO)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5190	38	14.71
	5230	46	16.68
UNII-2A	5270	54	16.62
	5310	62	15.89
5GHz WIFI (80MHz 802.11ac SISO)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-2C	5530	106	14.66
	5610	122	14.80
	5690	138	14.82
UNII-3	5775	155	14.47
5GHz WIFI (80MHz 802.11ax SISO)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-2C	5530	106	13.55
	5610	122	14.43
	5690	138	14.57
UNII-3	5775	155	14.32

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 163 of 255

REV 25.0
10/16/2024

Table 8-122
5 GHz WLAN Maximum Average RF Power – Antenna 5T, Variant 2

5GHz WIFI (40MHz 802.11n SISO)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5190	38	15.46
	5230	46	16.31
UNII-2A	5270	54	16.52
	5310	62	16.33
5GHz WIFI (40MHz 802.11ac SISO)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5190	38	15.42
	5230	46	16.51
UNII-2A	5270	54	16.76
	5310	62	15.90
5GHz WIFI (40MHz 802.11ax SISO)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5190	38	14.62
	5230	46	16.65
UNII-2A	5270	54	16.46
	5310	62	15.83
5GHz WIFI (80MHz 802.11ac SISO)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-2C	5530	106	14.55
	5610	122	14.63
	5690	138	14.62
UNII-3	5775	155	14.41
5GHz WIFI (80MHz 802.11ax SISO)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-2C	5530	106	13.47
	5610	122	14.68
	5690	138	14.40
UNII-3	5775	155	14.33

8.7 5 GHz WLAN Reduced Time-Averaged Conducted Powers

Table 8-123
5 GHz WLAN 6 dB Reduced Average RF Power – Antenna 1b, Variant 1

5GHz WIFI (80MHz 802.11ac SISO)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5210	42	4.06
UNII-2A	5290	58	4.03
UNII-2C	5530	106	3.40
	5610	122	3.39
	5690	138	3.37
UNII-3	5775	155	2.75

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 164 of 255

REV 25.0
10/16/2024

5GHz WIFI (80MHz 802.11ax SISO)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5210	42	3.97
UNII-2A	5290	58	4.08
UNII-2C	5530	106	3.61
	5610	122	3.43
	5690	138	3.46
UNII-3	5775	155	2.73

Table 8-124
5 GHz WLAN 6 dB Reduced Average RF Power – Antenna 1b, Variant 2

5GHz WIFI (80MHz 802.11ac SISO)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5210	42	3.97
UNII-2A	5290	58	4.15
UNII-2C	5530	106	3.43
	5610	122	3.42
	5690	138	3.49
UNII-3	5775	155	2.70
5GHz WIFI (80MHz 802.11ax SISO)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5210	42	3.99
UNII-2A	5290	58	4.11
UNII-2C	5530	106	3.52
	5610	122	3.68
	5690	138	3.52
UNII-3	5775	155	2.67

Table 8-125
5 GHz WLAN 6 dB Reduced Average RF Power – Antenna 3b, Variant 1

5GHz WIFI (80MHz 802.11ac SISO)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5210	42	3.89
UNII-2A	5290	58	3.80
UNII-2C	5530	106	2.66
	5610	122	2.85
	5690	138	3.00
UNII-3	5775	155	3.49
5GHz WIFI (80MHz 802.11ax SISO)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5210	42	3.91
UNII-2A	5290	58	3.96
UNII-2C	5530	106	2.80
	5610	122	2.82
	5690	138	2.75
UNII-3	5775	155	3.69

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 165 of 255

REV 25.0
10/16/2024

Table 8-126
5 GHz WLAN 6 dB Reduced Average RF Power – Antenna 3b, Variant 2

5GHz WIFI (80MHz 802.11ac SISO)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5210	42	3.83
UNII-2A	5290	58	4.03
UNII-2C	5530	106	2.76
	5610	122	2.89
	5690	138	2.77
UNII-3	5775	155	3.52
5GHz WIFI (80MHz 802.11ax SISO)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5210	42	3.81
UNII-2A	5290	58	3.70
UNII-2C	5530	106	2.65
	5610	122	2.74
	5690	138	3.04
UNII-3	5775	155	3.63

Table 8-127
5 GHz WLAN 6 dB Reduced Average RF Power – Antenna 5T, Variant 1

5GHz WIFI (80MHz 802.11ac SISO)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5210	42	10.69
UNII-2A	5290	58	10.63
UNII-2C	5530	106	8.57
	5610	122	8.52
	5690	138	8.61
UNII-3	5775	155	8.23
5GHz WIFI (80MHz 802.11ax SISO)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5210	42	10.51
UNII-2A	5290	58	10.58
UNII-2C	5530	106	8.44
	5610	122	8.46
	5690	138	8.34
UNII-3	5775	155	8.14

Table 8-128
5 GHz WLAN 6 dB Reduced Average RF Power – Antenna 5T, Variant 2

5GHz WIFI (80MHz 802.11ac SISO)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5210	42	10.43
UNII-2A	5290	58	10.48
UNII-2C	5530	106	8.56
	5610	122	8.66
	5690	138	8.57
UNII-3	5775	155	8.33

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 166 of 255

REV 25.0
10/16/2024

5GHz WIFI (80MHz 802.11ax SISO)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5210	42	10.70
UNII-2A	5290	58	10.68
UNII-2C	5530	106	8.44
	5610	122	8.43
	5690	138	8.21
UNII-3	5775	155	8.53

8.8 6 GHz WLAN Maximum Time-Averaged Conducted Powers

Table 8-129

6 GHz WLAN Maximum Average RF Power – Antenna 1b, Variant 1

6GHz WIFI (160MHz 802.11ax SISO)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-5	6025	15	9.83
	6345	79	10.42
UNII-6	6505	111	10.68
UNII-7	6665	143	10.35
UNII-8	6985	207	10.06

Table 8-130

6 GHz WLAN Maximum Average RF Power – Antenna 1b, Variant 2

6GHz WIFI (160MHz 802.11ax SISO)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-5	6025	15	9.71
	6345	79	10.21
UNII-6	6505	111	10.66
UNII-7	6665	143	10.37
UNII-8	6985	207	10.08

Table 8-131

6 GHz WLAN Maximum Average RF Power – Antenna 3b, Variant 1

6GHz WIFI (160MHz 802.11ax SISO)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-5	6025	15	11.20
	6345	79	12.68
UNII-6	6505	111	11.37
UNII-7	6665	143	13.60
UNII-8	6985	207	11.16

Table 8-132

6 GHz WLAN Maximum Average RF Power – Antenna 3b, Variant 2

6GHz WIFI (160MHz 802.11ax SISO)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-5	6025	15	11.07
	6345	79	12.60
UNII-6	6505	111	11.13
UNII-7	6665	143	13.38
UNII-8	6985	207	10.75

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 167 of 255

REV 25.0
10/16/2024

Table 8-133
6 GHz WLAN Maximum Average RF Power – Antenna 5T, Variant 1

6GHz WIFI (160MHz 802.11ax SISO)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-5	6025	15	12.34
	6345	79	11.77
UNII-6	6505	111	11.50
UNII-7	6665	143	11.69
UNII-8	6985	207	11.86

Table 8-134
6 GHz WLAN Maximum Average RF Power – Antenna 5T, Variant 2

6GHz WIFI (160MHz 802.11ax SISO)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-5	6025	15	12.55
	6345	79	11.77
UNII-6	6505	111	11.97
UNII-7	6665	143	11.68
UNII-8	6985	207	11.86

8.9 6 GHz WLAN Reduced Time-Averaged Conducted Powers

Table 8-135
6 GHz WLAN 6 dB Reduced Average RF Power – Antenna 1b, Variant 1

6GHz WIFI (160MHz 802.11ax SISO)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-5	6025	15	3.79
	6345	79	4.10
UNII-6	6505	111	4.36
UNII-7	6665	143	5.07
UNII-8	6985	207	5.10

Table 8-136
6 GHz WLAN 6 dB Reduced Average RF Power – Antenna 1b, Variant 2

6GHz WIFI (160MHz 802.11ax SISO)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-5	6025	15	3.72
	6345	79	4.42
UNII-6	6505	111	4.47
UNII-7	6665	143	5.10
UNII-8	6985	207	5.13

Table 8-137
6 GHz WLAN 6 dB Reduced Average RF Power – Antenna 3b, Variant 1

6GHz WIFI (160MHz 802.11ax SISO)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-5	6025	15	5.04
	6345	79	6.99
UNII-6	6505	111	6.73
UNII-7	6665	143	8.33
UNII-8	6985	207	7.76

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 168 of 255

REV 25.0
10/16/2024

Table 8-138
6 GHz WLAN 6 dB Reduced Average RF Power – Antenna 3b, Variant 2

6GHz WIFI (160MHz 802.11ax SISO)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-5	6025	15	5.05
	6345	79	6.95
UNII-6	6505	111	6.85
UNII-7	6665	143	8.09
UNII-8	6985	207	7.73

Table 8-139
6 GHz WLAN 6 dB Reduced Average RF Power – Antenna 5T, Variant 1

6GHz WIFI (160MHz 802.11ax SISO)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-5	6025	15	7.30
	6345	79	7.04
UNII-6	6505	111	6.35
UNII-7	6665	143	5.99
UNII-8	6985	207	6.30

Table 8-140
6 GHz WLAN 6 dB Reduced Average RF Power – Antenna 5T, Variant 2

6GHz WIFI (160MHz 802.11ax SISO)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-5	6025	15	7.18
	6345	79	7.00
UNII-6	6505	111	6.15
UNII-7	6665	143	5.96
UNII-8	6985	207	5.98

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 169 of 255

REV 25.0
10/16/2024

8.10 WLAN Power Reduction Verification Summary

Table 8-141
WLAN Power Reduction Verification

Antenna	Mode/Band	Condition (s)	Maximum Scenario Maximum Allowed Tune Up Power [dBm]	Reduced Scenario Maximum Allowed Tune Up Power [dBm]	Maximum Measured Power [dBm]	Reduced Measured Power [dBm]	Verdict
Ant 3A	2.4 GHz WLAN	Main Band 3A/3B ON	11	5	9.1	3.46	PASS
	2.4 GHz WLAN	ULCA ON	11	5	9.1	3.25	PASS
Ant 1A	2.4 GHz WLAN	Main Band 1A/1B ON	11.25	5.25	9.8	3.94	PASS
	2.4 GHz WLAN	ULCA ON	11.25	5.25	9.8	3.73	PASS
Ant 3B	5 GHz WLAN	Main Band 3A/3B ON	11	5	9.31	3.45	PASS
	5 GHz WLAN	ULCA ON	11	5	9.31	3.4	PASS
Ant 5T	5 GHz WLAN	Main Band 3A/3B ON	17.5	11.5	16	10.14	PASS
	5 GHz WLAN	ULCA ON	17.5	11.5	16	10.11	PASS
Ant 1B	5 GHz WLAN	Main Band 1A/1B ON	11	5	9.33	3.42	PASS
	5 GHz WLAN	ULCA ON	11	5	9.33	3.44	PASS
Ant 3B	6 GHz WLAN	Main Band 3A/3B ON	11.5	6	10.42	3.45	PASS
	6 GHz WLAN	ULCA ON	11.5	6	10.42	3.45	PASS
Ant 5T	6 GHz WLAN	Main Band 3A/3B ON	12.75	8.25	12	5.65	PASS
	6 GHz WLAN	ULCA ON	12.75	8.25	12	5.75	PASS
Ant 1B	6 GHz WLAN	Main Band 1A/1B ON	10	4.75	8.99	3.3	PASS
	6 GHz WLAN	ULCA ON	10	4.75	8.99	3.3	PASS

Maximum power will not exceed minimum of (SAR max cap, Reg max cap). Power reduction backoff for simultaneous transmission is applied to SAR max cap for each antenna. Reduced power level will not exceed minimum of (SAR max cap-power reduction backoff, Reg max cap).

Conducted powers were measured for each Mode/Band and applied condition. All conducted power measurements were verified to be within tolerance.

8.11 Notes for WLAN

Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.
- The WLAN chipset in this device is produced by two different suppliers. The electrically identical modules are manufactured with identical mechanical structure to meet the same specifications and functions.
- Two device variants are referenced as Variant 1 and Variant 2 in this report.
- WLAN SAR worst case configuration was spotchecked on Variant 1 and Variant 2.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 170 of 255

REV 25.0
10/16/2024

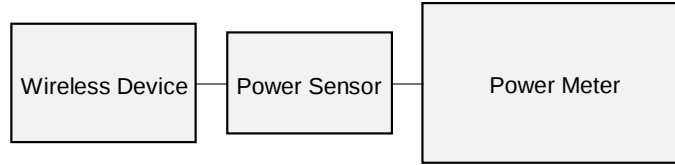


Figure 8-4
Power Measurement Setup

8.12 Bluetooth Maximum Conducted Powers

Table 8-142
Bluetooth Average RF Power – Antenna 1a, Variant 1

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	GFSK	1.0	0	10.96	12.474
2441	GFSK	1.0	39	11.02	12.647
2480	GFSK	1.0	78	10.88	12.246

Table 8-143
Bluetooth Average RF Power – Antenna 1a, Variant 2

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	GFSK	1.0	0	10.52	11.272
2441	GFSK	1.0	39	10.96	12.474
2480	GFSK	1.0	78	10.52	11.272

Table 8-144
Bluetooth Average RF Power – Antenna 3a, Variant 1

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	GFSK	1.0	0	11.25	13.335
2441	GFSK	1.0	39	11.58	14.388
2480	GFSK	1.0	78	11.07	12.794

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 171 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-145
Bluetooth Average RF Power – Antenna 3a, Variant 2

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	GFSK	1.0	0	11.26	13.366
2441	GFSK	1.0	39	11.55	14.289
2480	GFSK	1.0	78	11.29	13.459

8.13 Bluetooth Reduced Conducted Powers

Table 8-146
Bluetooth 4.5 dB Reduced Average RF Power – Antenna 1a, Variant 1

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	GFSK	1.0	0	6.74	4.721
2441	GFSK	1.0	39	7.25	5.309
2480	GFSK	1.0	78	7.41	5.508

Table 8-147
Bluetooth 4.5 dB Reduced Average RF Power – Antenna 1a, Variant 2

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	GFSK	1.0	0	6.65	4.624
2441	GFSK	1.0	39	7.04	5.058
2480	GFSK	1.0	78	6.98	4.989

Table 8-148
Bluetooth 7.0 dB Reduced Average RF Power – Antenna 1a, Variant 1

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	GFSK	1.0	0	3.70	2.344
2441	GFSK	1.0	39	4.09	2.564
2480	GFSK	1.0	78	4.51	2.825

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 172 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-149
Bluetooth 7.0 dB Reduced Average RF Power – Antenna 1a, Variant 2

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	GFSK	1.0	0	3.62	2.301
2441	GFSK	1.0	39	4.27	2.673
2480	GFSK	1.0	78	4.36	2.729

Table 8-150
Bluetooth 4.5 dB Reduced Average RF Power – Antenna 3a, Variant 1

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	GFSK	1.0	0	6.28	4.246
2441	GFSK	1.0	39	6.83	4.819
2480	GFSK	1.0	78	7.02	5.035

Table 8-151
Bluetooth 4.5 dB Reduced Average RF Power – Antenna 3a, Variant 2

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	GFSK	1.0	0	6.42	4.385
2441	GFSK	1.0	39	6.76	4.742
2480	GFSK	1.0	78	6.94	4.943

Table 8-152
Bluetooth 7.0 dB Reduced Average RF Power – Antenna 3a, Variant 1

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	GFSK	1.0	0	3.82	2.410
2441	GFSK	1.0	39	4.21	2.636
2480	GFSK	1.0	78	4.47	2.799

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 173 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-153
Bluetooth 7.0 dB Reduced Average RF Power – Antenna 3a, Variant 2


Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	GFSK	1.0	0	3.92	2.466
2441	GFSK	1.0	39	3.94	2.477
2480	GFSK	1.0	78	4.33	2.710

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 174 of 255

REV 25.0
10/16/2024

8.14 Bluetooth Duty Cycle Plots

Figure 8-5
Bluetooth Transmission Plot – Antenna 1a, Variant 1

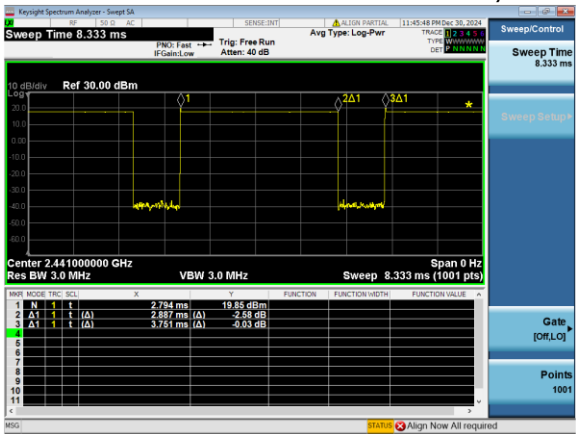


Equation 8-1
Bluetooth Duty Cycle Calculation – Antenna 1a, Variant 1

$$Duty\ Cycle = \frac{Pulse\ Width}{Period} * 100\% = \frac{2.887\ ms}{3.751\ ms} * 100\% = 76.97\%$$

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 175 of 255


Figure 8-6
Bluetooth Transmission Plot – Antenna 1a, Variant 2

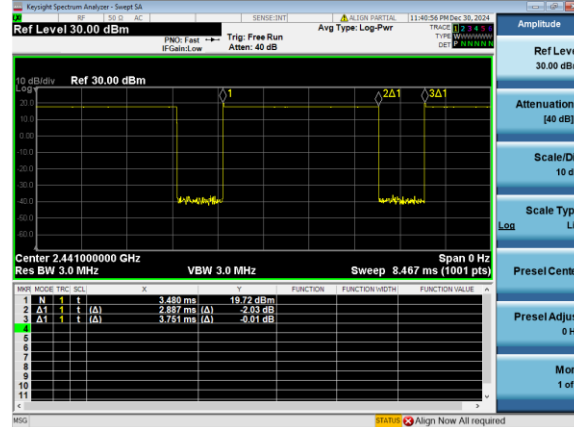

Equation 8-2
Bluetooth Duty Cycle Calculation – Antenna 1a, Variant 2

$$Duty\ Cycle = \frac{Pulse\ Width}{Period} * 100\% = \frac{2.887\ ms}{3.751\ ms} * 100\% = 76.97\%$$

Figure 8-7
Bluetooth Transmission Plot – Antenna 3a, Variant 1

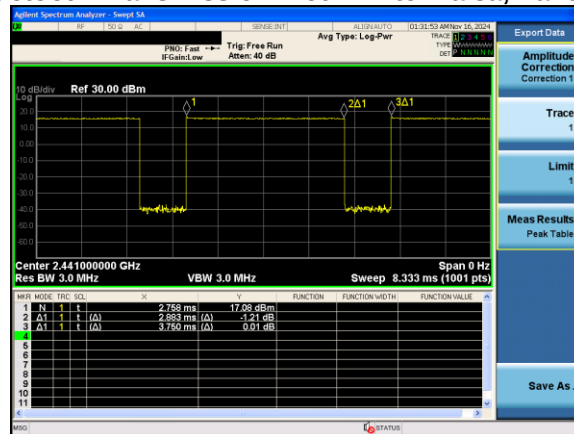


Equation 8-3
Bluetooth Duty Cycle Calculation – Antenna 3a, Variant 1

$$Duty\ Cycle = \frac{Pulse\ Width}{Period} * 100\% = \frac{2.883\ ms}{3.750\ ms} * 100\% = 76.88\%$$

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 176 of 255

REV 25.0
10/16/2024

Figure 8-8
Bluetooth Transmission Plot – Antenna 3a, Variant 2

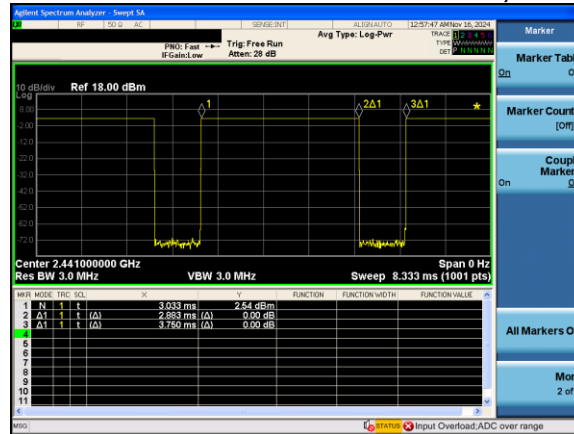

Equation 8-4
Bluetooth Duty Cycle Calculation – Antenna 3a, Variant 2

$$Duty\ Cycle = \frac{Pulse\ Width}{Period} * 100\% = \frac{2.883\ ms}{3.750\ ms} * 100\% = 76.88\%$$

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 177 of 255

REV 25.0
10/16/2024

8.15 802.15.4 Maximum Conducted Powers

Table 8-154
802.15.4 Average RF Power – Antenna 1a, Variant 1

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2405	O-QPSK	1.0	11	11.21	13.213
2440	O-QPSK	1.0	18	11.05	12.735
2475	O-QPSK	1.0	25	11.37	13.709

Table 8-155
802.15.4 Average RF Power – Antenna 1a, Variant 2

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2405	O-QPSK	1.0	11	11.10	12.882
2440	O-QPSK	1.0	18	11.11	12.912
2475	O-QPSK	1.0	25	11.36	13.677

Table 8-156
802.15.4 Average RF Power – Antenna 3a, Variant 1

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2405	O-QPSK	1.0	11	11.20	13.183
2440	O-QPSK	1.0	18	11.78	15.066
2475	O-QPSK	1.0	25	11.03	12.677

Table 8-157
802.15.4 Average RF Power – Antenna 3a, Variant 2

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2405	O-QPSK	1.0	11	11.10	12.882
2440	O-QPSK	1.0	18	11.42	13.868
2475	O-QPSK	1.0	25	11.16	13.062

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 178 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

8.16 802.15.4 Reduced Conducted Powers

Table 8-158
802.15.4, 4.5 dB Reduced Average RF Power – Antenna 1a, Variant 1

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2405	O-QPSK	1.0	11	6.87	4.864
2440	O-QPSK	1.0	18	7.17	5.212
2475	O-QPSK	1.0	25	7.20	5.248

Table 8-159
802.15.4, 4.5 dB Reduced Average RF Power – Antenna 1a, Variant 2

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2405	O-QPSK	1.0	11	6.94	4.943
2440	O-QPSK	1.0	18	6.97	4.977
2475	O-QPSK	1.0	25	6.93	4.932

Table 8-160
802.15.4, 7.0 dB Reduced Average RF Power – Antenna 1a, Variant 1

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2405	O-QPSK	1.0	11	4.35	2.723
2440	O-QPSK	1.0	18	4.71	2.958
2475	O-QPSK	1.0	25	4.77	2.999

Table 8-161
802.15.4, 7.0 dB Reduced Average RF Power – Antenna 1a, Variant 2

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2405	O-QPSK	1.0	11	5.12	3.251
2440	O-QPSK	1.0	18	5.01	3.170
2475	O-QPSK	1.0	25	5.26	3.357

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 179 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-162
802.15.4, 4.5 dB Reduced Average RF Power – Antenna 3a, Variant 1

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2405	O-QPSK	1.0	11	6.81	4.797
2440	O-QPSK	1.0	18	6.88	4.875
2475	O-QPSK	1.0	25	7.06	5.082

Table 8-163
802.15.4, 4.5 dB Reduced Average RF Power – Antenna 3a, Variant 2

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2405	O-QPSK	1.0	11	6.89	4.887
2440	O-QPSK	1.0	18	6.67	4.645
2475	O-QPSK	1.0	25	6.84	4.831

Table 8-164
802.15.4, 7.0 dB Reduced Average RF Power – Antenna 3a, Variant 1

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2405	O-QPSK	1.0	11	5.02	3.177
2440	O-QPSK	1.0	18	4.95	3.126
2475	O-QPSK	1.0	25	5.11	3.243

Table 8-165
802.15.4, 7.0 dB Reduced Average RF Power – Antenna 3a, Variant 2

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2405	O-QPSK	1.0	11	4.62	2.897
2440	O-QPSK	1.0	18	4.58	2.871
2475	O-QPSK	1.0	25	4.81	3.027


FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 180 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

8.17 802.15.4 Duty Cycle Plots

Figure 8-9
802.15.4 Transmission Plot – Antenna 1a and 3a, Variant 1

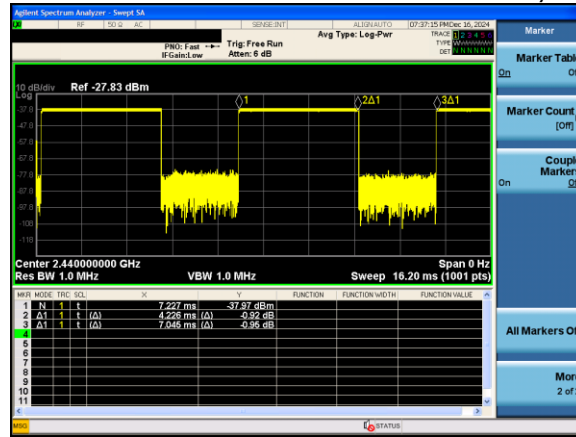


Note: Measured duty cycle as shown above is within the device maximum source-based duty cycle of 60%.

Equation 8-5
802.15.4 Duty Cycle Calculation – Antenna 1a and 3a, Variant 1

$$\text{Duty Cycle} = \frac{\text{Pulse Width}}{\text{Period}} * 100\% = \frac{4.226 \text{ ms}}{7.045 \text{ ms}} * 100\% = 59.99\%$$

Figure 8-10
802.15.4 Transmission Plot – Antenna 1a and 3a, Variant 2

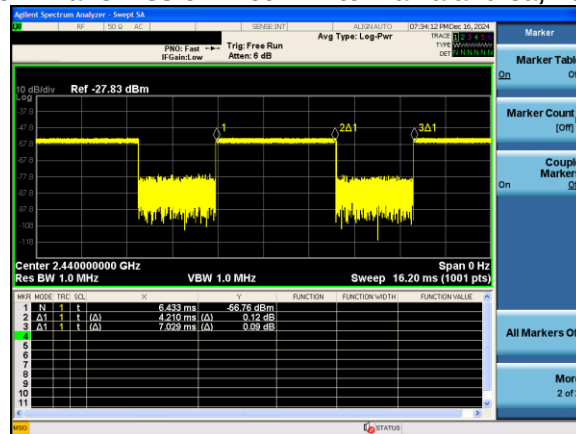

Note: Measured duty cycle as shown above is within the device maximum source-based duty cycle of 60%.

Equation 8-6
802.15.4 Duty Cycle Calculation – Antenna 1a and 3a, Variant 2


$$\text{Duty Cycle} = \frac{\text{Pulse Width}}{\text{Period}} * 100\% = \frac{4.210 \text{ ms}}{7.029 \text{ ms}} * 100\% = 59.89\%$$

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 181 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Figure 8-11
802.15.4 Transmission Plot – Antenna 1a and 3a, Variants 1 and 2

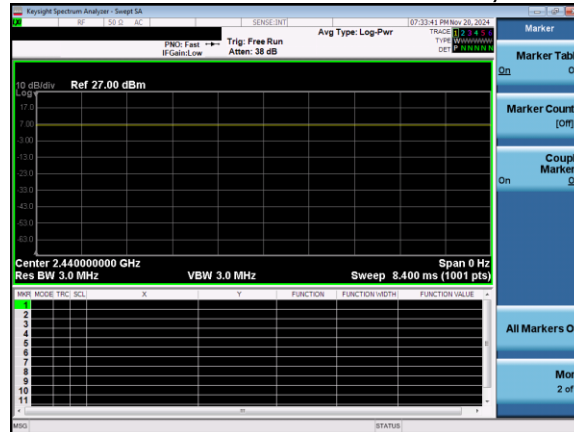

Note: Test mode measured duty cycle for 802.15.4 during SAR measurement.

Equation 8-7
802.15.4 Duty Cycle Calculation – Antenna 1a and 3a, Variants 1 and 2

$$\text{Duty Cycle} = 100\%$$

8.18 Bluetooth/802.15.4 Power Reduction Verification Summary

Table 8-166
Bluetooth/802.15.4 Power Reduction Verification

Antenna	Mode/Band	Condition (s)	Maximum Scenario Maximum Allowed Tune Up Power [dBm]	Reduced Scenario Maximum Allowed Tune Up Power [dBm]	Maximum Measured Power	Reduced Measured Power	Verdict
					[dBm]	[dBm]	
Ant 3A	2.4 GHz Bluetooth	Main Band 3A/3B ON	12	7.5	9.52	5.8	PASS
	2.4 GHz Bluetooth	ULCA ON	12	5	9.52	3.34	PASS
	2.4 GHz Thread	Main band Ant 1A/1B ON and 5/6 GHz WLAN 3B ON	12.5	8	10.4	6.32	PASS
	2.4 GHz Thread	Main band Ant 2 ON and 5/6 GHz WLAN Ant 3B ON	12.5	8	10.4	6.32	PASS
	2.4 GHz Thread	Main band Ant 3A/3B ON and 5/6 GHz WLAN Ant 3B ON	12.5	5.5	10.4	3.66	PASS
	2.4 GHz Thread	Main Band Ant 4 ON and 5/6 GHz WLAN Ant 3B ON	12.5	8	10.4	6.32	PASS
	2.4 GHz Bluetooth	ULCA ON and 5/6 GHz WLAN 3B ON	12	5	9.52	3.54	PASS
Ant 1A	2.4 GHz Bluetooth	5/6 GHz WLAN Ant 3B ON	12	7.5	9.52	6.12	PASS
	2.4 GHz Thread	Main Band 1A/1B ON	12.5	8	10.88	6.6	PASS
	2.4 GHz Thread	ULCA ON	12.5	5.5	10.88	4.19	PASS
	2.4 GHz Bluetooth	Main band Ant 1A/1B ON and 5/6 GHz WLAN 1B ON	12.5	5.5	11.02	4.05	PASS
	2.4 GHz Bluetooth	Main band Ant 2 ON and 5/6 GHz WLAN 1B ON	12.5	8	11.02	6.52	PASS
	2.4 GHz Bluetooth	Main band Ant 3A/3B ON and 5/6 GHz WLAN 1B ON	12.5	8	11.02	6.52	PASS
	2.4 GHz Bluetooth	Main band Ant 4 ON and 5/6 GHz WLAN 1B ON	12.5	8	11.02	6.6	PASS
	2.4 GHz Thread	ULCA ON and 5/6 GHz WLAN 1B ON	12.5	5.5	10.88	4.19	PASS
	2.4 GHz Thread	5/6 GHz WLAN 1B ON	12.5	8	10.88	6.6	PASS

Per manufacturer, 2.4 GHz Bluetooth and 802.15.4 share the same antenna path and reduces with the same power backoff when it transmits simultaneously with cellular and 5/6 GHz WLAN antennas. Therefore, conducted power measurements were measured for both mode/bands as shown above and applied condition.

Maximum power will not exceed minimum of (SAR max cap, Reg max cap). Power reduction backoff for simultaneous transmission is applied to SAR max cap for each antenna. Reduced power level will not exceed minimum of (SAR max cap-power reduction backoff, Reg max cap).

Per manufacturer, 2.4 GHz Bluetooth and 802.15.4 share the same antenna path and reduces with the same power backoff when it transmits simultaneously with cellular and 5/6 GHz WLAN antennas. Therefore, conducted

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 182 of 255

REV 25.0
10/16/2024

power measurements were measured for both mode/band as shown above and applied condition. All conducted power measurements were verified to be below the maximum allowed.

8.19 Notes for Bluetooth/802.15.4

- The Bluetooth/802.15.4 chipset in this device is produced by two different suppliers. The electrically identical modules are manufactured with identical mechanical structures to meet the same specifications and functions. Two device variants are referenced as Variant 1 and Variant 2 in this report.
- Bluetooth/802.15.4 SAR worst case configuration was spotchecked on Variant 1 and Variant 2. The Variant with the highest reported SAR value was evaluated for the remaining Bluetooth/802.15.4 configurations.
- Full power measurements were performed for Variant 1 and Variant 2 per FCC KDB Procedures 248227.




Figure 8-12
Power Measurement Setup

8.20 NB UNII Maximum Conducted Powers

Table 8-167

NB UNII 1 Average RF Power – Antenna 1b, Variant 1

Type	Band	Frequency	Average
HDR4	U-NII 1	5162	9.67
		5204	9.6
		5245	9.85

Table 8-168

NB UNII 1 Average RF Power – Antenna 1b, Variant 2

Type	Band	Frequency	Average
HDR4	U-NII 1	5162	9.23
		5204	9.38
		5245	9.44

Table 8-169

NB UNII 1 Average RF Power – Antenna 3b, Variant 1

Type	Band	Frequency	Average
HDR4	U-NII 1	5162	10.94
		5204	10.88
		5245	10.86

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 183 of 255

REV 25.0
10/16/2024

Table 8-170
NB UNII 1 Average RF Power – Antenna 3b, Variant 2

Type	Band	Frequency	Average
HDR4	U-NII 1	5162	10.53
		5204	10.88
		5245	10.5

Table 8-171
NB UNII 1 Average RF Power – Antenna 5T, Variant 1

Type	Band	Frequency	Average
HDR4	U-NII 1	5162	11.62
		5204	11.45
		5245	11.58

Table 8-172
NB UNII 1 Average RF Power – Antenna 5T, Variant 2

Type	Band	Frequency	Average
HDR4	U-NII 1	5162	11.35
		5204	11.42
		5245	11.57

Table 8-173
NB UNII 3 Average RF Power – Antenna 1b, Variant 1

Type	Band	Frequency	Average
BDR	U-NII 3	5733	10.61
		5789	10.49
		5844	10.47

Table 8-174
NB UNII 3 Average RF Power – Antenna 1b, Variant 2

Type	Band	Frequency	Average
BDR	U-NII 3	5733	10.59
		5789	10.91
		5844	10.30

Table 8-175
NB UNII 3 Average RF Power – Antenna 3b, Variant 1

Type	Band	Frequency	Average
BDR	U-NII 3	5733	11.32
		5789	10.77
		5844	10.88

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 184 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-176
NB UNII 3 Average RF Power – Antenna 3b, Variant 2

Type	Band	Frequency	Average
BDR	U-NII 3	5733	11.11
		5789	11.03
		5844	10.98

Table 8-177
NB UNII 3 Average RF Power – Antenna 5T, Variant 1

Type	Band	Frequency	Average
BDR	U-NII 3	5733	12.5
		5789	12.55
		5844	12.49

Table 8-178
NB UNII 3 Average RF Power – Antenna 5T, Variant 2

Type	Band	Frequency	Average
BDR	U-NII 3	5733	12.78
		5789	12.69
		5844	12.56

8.21 NB UNII Reduced Conducted Powers

Table 8-179
NB UNII 1, 4.5 dB Reduced Average RF Power – Antenna 1b, Variant 1

Type	Band	Frequency	Average
BDR	U-NII 1	5162	6.36
		5204	6.37
		5245	6.45

Table 8-180
NB UNII 1, 4.5 dB Reduced Average RF Power – Antenna 1b, Variant 2

Type	Band	Frequency	Average
BDR	U-NII 1	5162	6.3
		5204	6.18
		5245	6.35

Table 8-181
NB UNII 1, 4.5 dB Reduced Average RF Power – Antenna 3b, Variant 1

Type	Band	Frequency	Average
BDR	U-NII 1	5162	5.96
		5204	5.98
		5245	5.99

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 185 of 255

REV 25.0
10/16/2024

Table 8-182
NB UNII 1, 4.5 dB Reduced Average RF Power – Antenna 3b, Variant 2

Type	Band	Frequency	Average
BDR	U-NII 1	5162	6.29
		5204	6.16
		5245	6.15

Table 8-183
NB UNII 1, 7.0 dB Reduced Average RF Power – Antenna 1b, Variant 1

Type	Band	Frequency	Average
BDR	U-NII 1	5162	3.96
		5204	3.98
		5245	4.14

Table 8-184
NB UNII 1 7.0 dB Reduced Average RF Power – Antenna 1b, Variant 2

Type	Band	Frequency	Average
BDR	U-NII 1	5162	4.05
		5204	4.12
		5245	4.25

Table 8-185
NB UNII 1, 7.0 dB Reduced Average RF Power – Antenna 3b, Variant 1

Type	Band	Frequency	Average
BDR	U-NII 1	5162	2.87
		5204	2.68
		5245	2.64

Table 8-186
NB UNII 1, 7.0 dB Reduced Average RF Power – Antenna 3b, Variant 2

Type	Band	Frequency	Average
BDR	U-NII 1	5162	2.67
		5204	2.8
		5245	2.81

Table 8-187
NB UNII 1, 7.0 dB Reduced Average RF Power – Antenna 5T, Variant 1

Type	Band	Frequency	Average
HDR	U-NII 1	5162	11.02
		5204	10.93
		5245	10.74

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 186 of 255

REV 25.0
10/16/2024

Table 8-188
NB UNII 1, 7.0 dB Reduced Average RF Power – Antenna 5T, Variant 2

Type	Band	Frequency	Average
HDR	U-NII 1	5162	10.79
		5204	10.84
		5245	10.74

Table 8-189
NB UNII 3, 4.5 dB Reduced Average RF Power – Antenna 1b, Variant 1

Type	Band	Frequency	Average
BDR	U-NII 3	5733	5.29
		5789	5.11
		5844	4.81

Table 8-190
NB UNII 3, 4.5 dB Reduced Average RF Power – Antenna 1b, Variant 2

Type	Band	Frequency	Average
BDR	U-NII 3	5733	5.42
		5789	5.54
		5844	5.26

Table 8-191
NB UNII 3, 4.5 dB Reduced Average RF Power – Antenna 3b, Variant 1

Type	Band	Frequency	Average
BDR	U-NII 3	5733	5.22
		5789	5.34
		5844	5.01

Table 8-192
NB UNII 3, 4.5 dB Reduced Average RF Power – Antenna 3b, Variant 2

Type	Band	Frequency	Average
BDR	U-NII 3	5733	5.54
		5789	5.31
		5844	5.19

Table 8-193
NB UNII 3, 4.5 dB Reduced Average RF Power – Antenna 5T, Variant 1

Type	Band	Frequency	Average
BDR	U-NII 3	5733	10.99
		5789	11.07
		5844	11.16

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 187 of 255

REV 25.0
10/16/2024

Table 8-194
NB UNII 3, 4.5 dB Reduced Average RF Power – Antenna 5T, Variant 2

Type	Band	Frequency	Average
BDR	U-NII 3	5733	10.8
		5789	10.68
		5844	10.53

Table 8-195
NB UNII 3, 7.0 dB Reduced Average RF Power – Antenna 1b, Variant 1

Type	Band	Frequency	Average
BDR	U-NII 3	5733	3.13
		5789	2.92
		5844	2.78

Table 8-196
NB UNII 3, 7.0 dB Reduced Average RF Power – Antenna 1b, Variant 2

Type	Band	Frequency	Average
BDR	U-NII 3	5733	2.96
		5789	3.44
		5844	2.94

Table 8-197
NB UNII 3, 7.0 dB Reduced Average RF Power – Antenna 3b, Variant 1

Type	Band	Frequency	Average
BDR	U-NII 3	5733	2.6
		5789	2.52
		5844	2.58

Table 8-198
NB UNII 3, 7.0 dB Reduced Average RF Power – Antenna 3b, Variant 2

Type	Band	Frequency	Average
BDR	U-NII 3	5733	2.51
		5789	2.52
		5844	2.59

Table 8-199
NB UNII 3, 7.0 dB Reduced Average RF Power – Antenna 5T, Variant 1

Type	Band	Frequency	Average
BDR	U-NII 3	5733	8.67
		5789	8.48
		5844	8.56

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 188 of 255

REV 25.0
10/16/2024

Table 8-200
NB UNII 3, 7.0 dB Reduced Average RF Power – Antenna 5T, Variant 2


Type	Band	Frequency	Average
BDR	U-NII 3	5733	8.15
		5789	8.11
		5844	8.07

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 189 of 255

REV 25.0
10/16/2024

8.22 NB UNII Duty Cycle Plots

Figure 8-13
NB UNII 1 HDR4 Transmission Plot – Antenna 1b, Variant 1

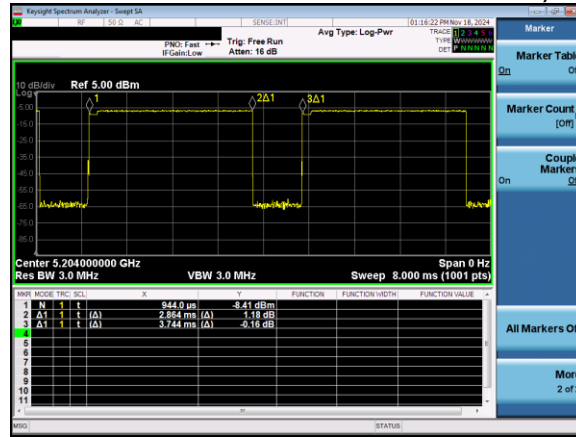


Equation 8-8

NB UNII 1 HDR4 Duty Cycle Calculation – Antenna 1b, Variant 1

$$\text{Duty Cycle} = \frac{\text{Pulse Width}}{\text{Period}} * 100\% = \frac{2.864 \text{ ms}}{3.744 \text{ ms}} * 100\% = 76.50\%$$

Figure 8-14
NB UNII 1 HDR4 Transmission Plot – Antenna 1b, Variant 2

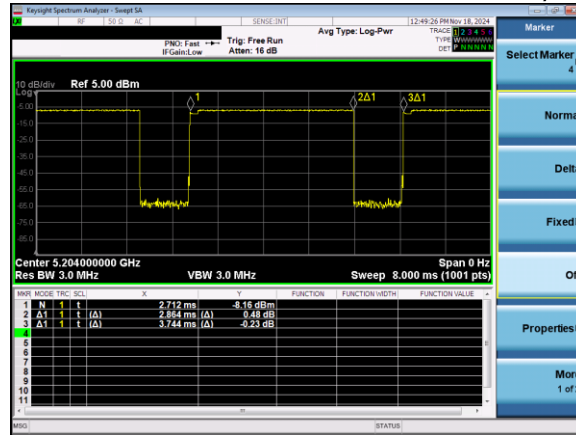

Equation 8-9

NB UNII 1 HDR4 Duty Cycle Calculation – Antenna 1b, Variant 2


$$\text{Duty Cycle} = \frac{\text{Pulse Width}}{\text{Period}} * 100\% = \frac{2.864 \text{ ms}}{3.744 \text{ ms}} * 100\% = 76.50\%$$

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 190 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.


Figure 8-15
NB UNII 1 BDR Transmission Plot – Antenna 1b, Variant 1

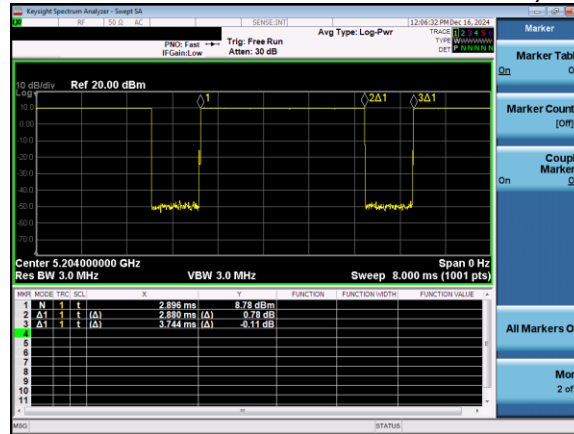

Equation 8-10
NB UNII 1 BDR Duty Cycle Calculation – Antenna 1b, Variant 1

$$Duty\ Cycle = \frac{Pulse\ Width}{Period} * 100\% = \frac{2.880\ ms}{3.744\ ms} * 100\% = 76.92\%$$

Figure 8-16
NB UNII 1 BDR Transmission Plot – Antenna 1b, Variant 2

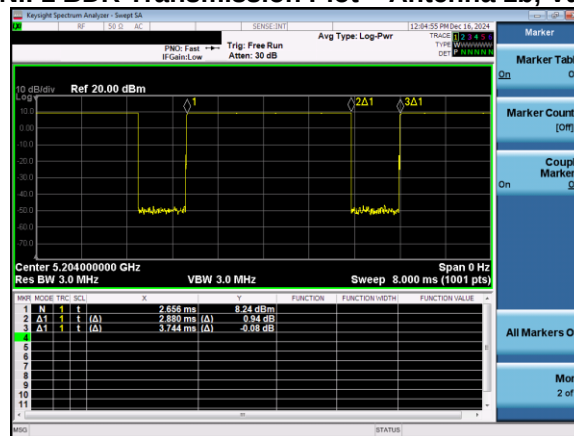

Equation 8-11
NB UNII 1 BDR Duty Cycle Calculation – Antenna 1b, Variant 2


$$Duty\ Cycle = \frac{Pulse\ Width}{Period} * 100\% = \frac{2.880\ ms}{3.744\ ms} * 100\% = 76.92\%$$

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 191 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Figure 8-17
NB UNII 1 HDR4 Transmission Plot – Antenna 3b, Variant 1

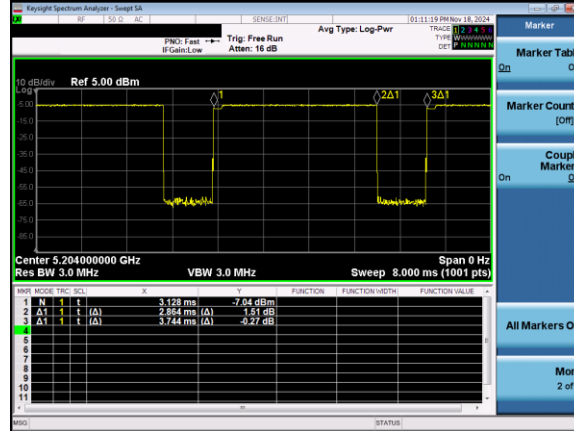


Equation 8-12

NB UNII 1 HDR4 Duty Cycle Calculation – Antenna 3b, Variant 1

$$Duty\ Cycle = \frac{Pulse\ Width}{Period} * 100\% = \frac{2.864\ ms}{3.744\ ms} * 100\% = 76.50\%$$

Figure 8-18
NB UNII 1 HDR4 Transmission Plot – Antenna 3b, Variant 2

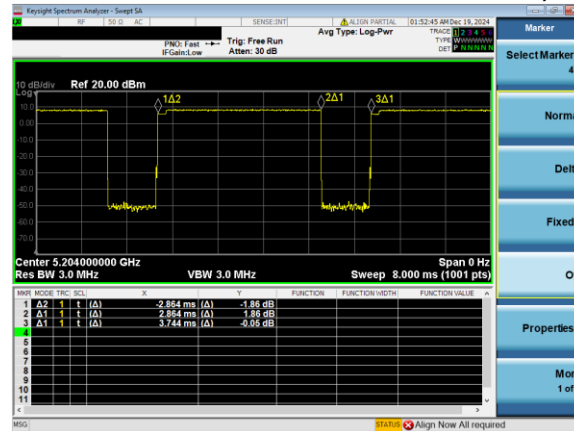

Equation 8-13


NB UNII 1 HDR4 Duty Cycle Calculation – Antenna 3b, Variant 2

$$Duty\ Cycle = \frac{Pulse\ Width}{Period} * 100\% = \frac{2.864\ ms}{3.744\ ms} * 100\% = 76.50\%$$

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 192 of 255

REV 25.0
10/16/2024


Figure 8-19
NB UNII 1 BDR Transmission Plot – Antenna 3b, Variant 1

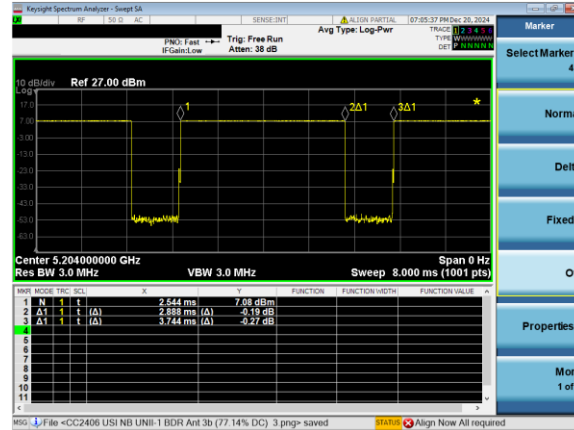

Equation 8-14
NB UNII 1 BDR Duty Cycle Calculation – Antenna 3b, Variant 1

$$Duty\ Cycle = \frac{Pulse\ Width}{Period} * 100\% = \frac{2.888\ ms}{3.744\ ms} * 100\% = 77.14\%$$

Figure 8-20
NB UNII 1 BDR Transmission Plot – Antenna 3b, Variant 2

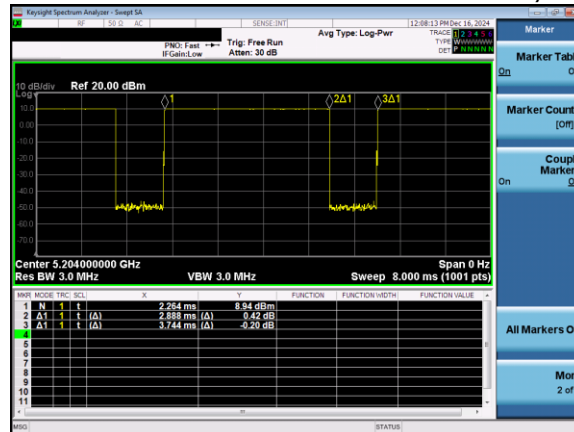


Equation 8-15
NB UNII 1 BDR Duty Cycle Calculation – Antenna 3b, Variant 2

$$Duty\ Cycle = \frac{Pulse\ Width}{Period} * 100\% = \frac{2.888\ ms}{3.744\ ms} * 100\% = 77.14\%$$

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 193 of 255

REV 25.0
10/16/2024


Figure 8-21
NB UNII 1 HDR4 Transmission Plot – Antenna 5T, Variant 1

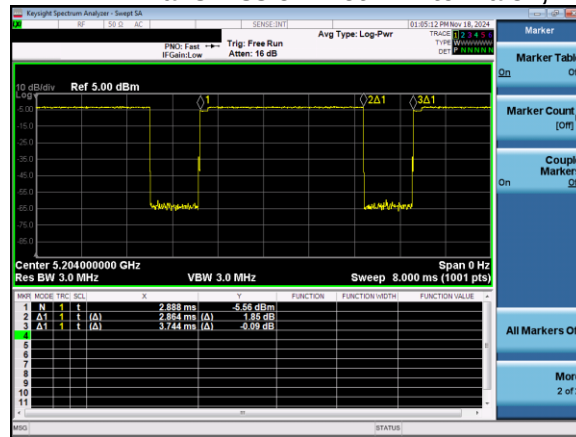

Equation 8-16
NB UNII 1 HDR4 Duty Cycle Calculation – Antenna 5T, Variant 1

$$Duty\ Cycle = \frac{Pulse\ Width}{Period} * 100\% = \frac{2.864\ ms}{3.744\ ms} * 100\% = 76.50\%$$

Figure 8-22
NB UNII 1 HDR4 Transmission Plot – Antenna 5T, Variant 2

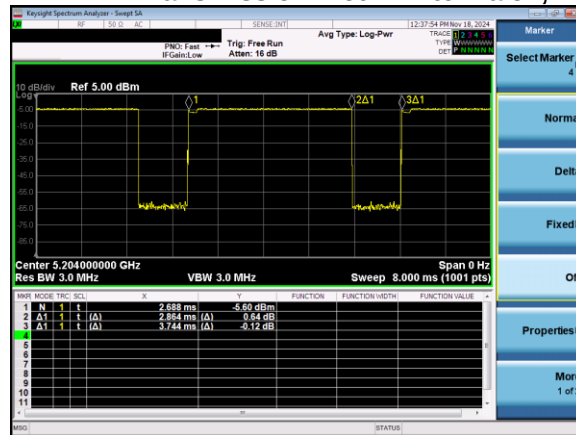


Equation 8-17
NB UNII 1 HDR4 Duty Cycle Calculation – Antenna 5T, Variant 2

$$Duty\ Cycle = \frac{Pulse\ Width}{Period} * 100\% = \frac{2.864\ ms}{3.744\ ms} * 100\% = 76.50\%$$

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 194 of 255

REV 25.0
10/16/2024

Figure 8-23
NB UNII 3 BDR Transmission Plot – Antenna 1b, Variant 1

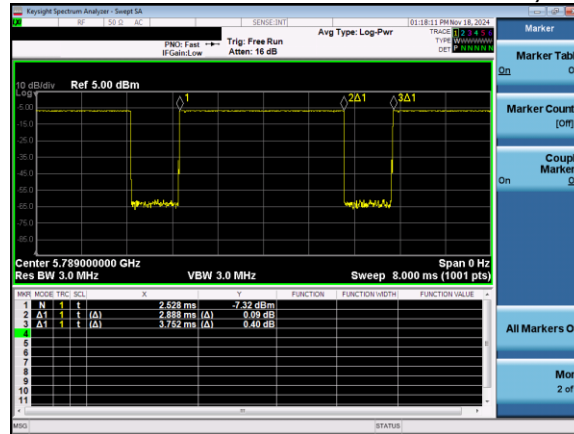


Equation 8-18

NB UNII 3 BDR Duty Cycle Calculation – Antenna 1b, Variant 1

$$\text{Duty Cycle} = \frac{\text{Pulse Width}}{\text{Period}} * 100\% = \frac{2.888 \text{ ms}}{3.752 \text{ ms}} * 100\% = 76.97\%$$

Figure 8-24
NB UNII 3 BDR Transmission Plot – Antenna 1b, Variant 2

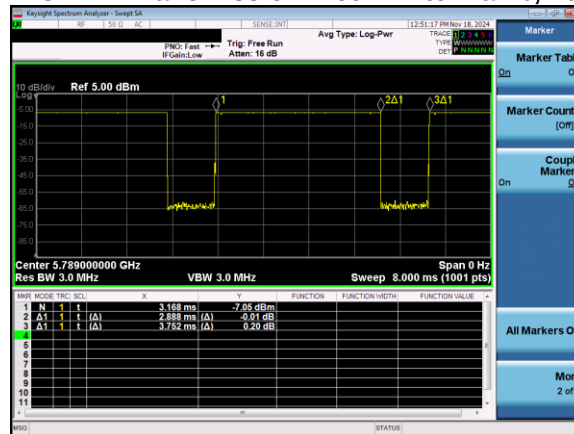

Equation 8-19

NB UNII 3 BDR Duty Cycle Calculation – Antenna 1b, Variant 2


$$\text{Duty Cycle} = \frac{\text{Pulse Width}}{\text{Period}} * 100\% = \frac{2.888 \text{ ms}}{3.752 \text{ ms}} * 100\% = 76.97\%$$

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 195 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Figure 8-25
NB UNII 3 BDR Transmission Plot – Antenna 3b, Variant 1

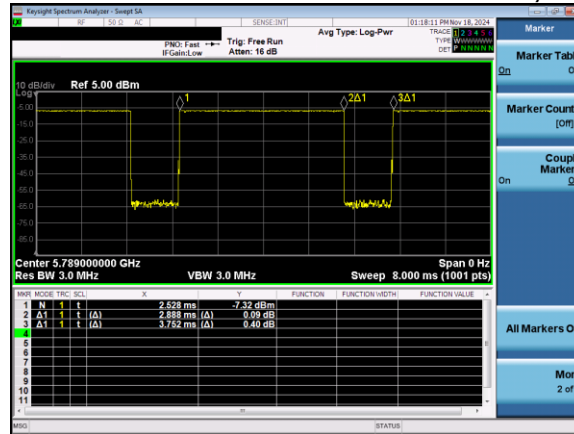


Equation 8-20

NB UNII 3 BDR Duty Cycle Calculation – Antenna 3b, Variant 1

$$\text{Duty Cycle} = \frac{\text{Pulse Width}}{\text{Period}} * 100\% = \frac{2.888 \text{ ms}}{3.752 \text{ ms}} * 100\% = 76.97\%$$

Figure 8-26
NB UNII 3 BDR Transmission Plot – Antenna 3b, Variant 2

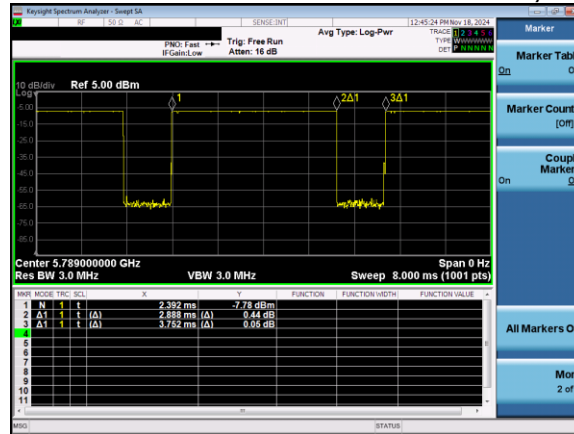

Equation 8-21

NB UNII 3 BDR Duty Cycle Calculation – Antenna 3b, Variant 2


$$\text{Duty Cycle} = \frac{\text{Pulse Width}}{\text{Period}} * 100\% = \frac{2.888 \text{ ms}}{3.752 \text{ ms}} * 100\% = 76.97\%$$

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 196 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Figure 8-27
NB UNII 3 BDR Transmission Plot – Antenna 5T, Variant 1

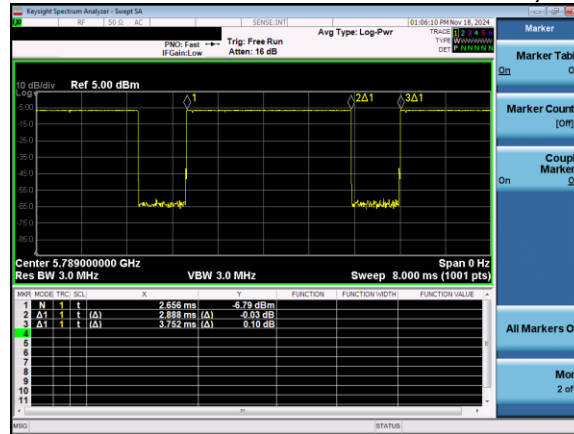


Equation 8-22

NB UNII 3 BDR Duty Cycle Calculation – Antenna 5T, Variant 1

$$Duty\ Cycle = \frac{Pulse\ Width}{Period} * 100\% = \frac{2.888\ ms}{3.752\ ms} * 100\% = 76.97\%$$

Figure 8-28
NB UNII 3 BDR Transmission Plot – Antenna 5T, Variant 2

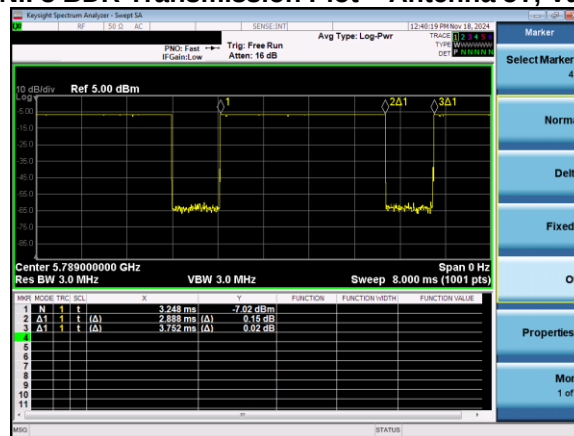

Equation 8-23

NB UNII 3 BDR Duty Cycle Calculation – Antenna 5T, Variant 2

$$Duty\ Cycle = \frac{Pulse\ Width}{Period} * 100\% = \frac{2.888\ ms}{3.752\ ms} * 100\% = 76.97\%$$

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 197 of 255

REV 25.0
10/16/2024

8.23 NB UNII Power Reduction Verification Summary

Table 8-201
NB UNII Power Reduction Verification

Antenna	Mode/Band	Condition (s)	Maximum Scenario Maximum Allowed Tune Up Power [dBm]	Reduced Scenario Maximum Allowed Tune Up Power [dBm]	Maximum Measured Power [dBm]	Reduced Measured Power [dBm]	Verdict
Ant 3B	NB UNII	Main Band 3A/3B ON	11.5	7	9.96	5.29	PASS
	NB UNII	ULCA ON	11.5	4.5	9.96	3.04	PASS
	NB UNII	2.4 GHz WLAN Ant 3A/1A ON	11.5	7	9.96	5.29	PASS
	NB UNII	ULCA ON an 2.4 GHz WLAN 3A ON	11.5	4.5	9.96	3.04	PASS
	NB UNII	Main band Ant 1A/1B ON and 2.4 GHZ WLAN 3A/1A ON	11.5	7	9.96	5.29	PASS
	NB UNII	Main band Ant 2 ON and 2.4 GHZ WLAN 3A/1A ON	11.5	7	9.96	5.29	PASS
	NB UNII	Main band Ant 3A/3B ON and 2.4 GHZ WLAN 3A/1A ON	11.5	4.5	9.96	3.04	PASS
	NB UNII	Main band Ant 4 ON and 2.4 GHZ WLAN 3A/1A ON	11.5	7	9.96	5.14	PASS
Ant 5T	NB UNII	Main Band 3A/3B ON	13.5	12	11.5	11	PASS
	NB UNII	ULCA ON	13.5	9.5	11.5	8.04	PASS
	NB UNII	2.4 GHz WLAN Ant 3A/1A ON	13.5	12	11.5	10.8	PASS
	NB UNII	ULCA ON an 2.4 GHz WLAN 3A/1A ON	13.5	9.5	11.5	8.04	PASS
	NB UNII	Main band Ant 3A/3B ON and 2.4 GHZ WLAN 3A/1A ON	13.5	9.5	11.5	8.04	PASS
	NB UNII	Main band Ant 1A/1B ON and 2.4 GHZ WLAN 3A/1A ON	13.5	12	11.5	10.8	PASS
	NB UNII	Main band Ant 2 ON and 2.4 GHZ WLAN 3A/1A ON	13.5	12	11.5	10.8	PASS
	NB UNII	Main band Ant 4 ON and 2.4 GHZ WLAN 3A/1A ON	13.5	12	11.5	10.8	PASS
Ant 1B	NB UNII	Main Band 1A/1B ON	11	6.5	9.25	5.12	PASS
	NB UNII	ULCA ON	11	4	9.25	3.28	PASS
	NB UNII	2.4 GHz WLAN Ant 3A/1A ON	11	6.5	9.25	5.12	PASS
	NB UNII	ULCA ON an 2.4 GHz WLAN 3A/1A ON	11	4	9.25	3.28	PASS
	NB UNII	Main band Ant 1A/1B ON and 2.4 GHZ WLAN 3A/1A ON	11	4	9.25	3.28	PASS
	NB UNII	Main band Ant 2 ON and 2.4 GHZ WLAN 3A/1A ON	11	6.5	9.25	5.12	PASS
	NB UNII	Main band Ant 3A/3B ON and 2.4 GHZ WLAN 3A/1A ON	11	6.5	9.25	5.12	PASS
	NB UNII	Main band Ant 4 ON and 2.4 GHZ WLAN 3A/1A ON	11	6.5	9.25	5.12	PASS

NB UNII max power will not exceed minimum of (SAR max cap, Reg max cap). Power reduction backoff for simultaneous transmission is applied to SAR max cap for each antenna.
Reduced power level will not exceed minimum of (SAR max cap-power reduction backoff, Reg max cap).

Maximum power will not exceed minimum of (SAR max cap, Reg max cap). Power reduction backoff for simultaneous transmission is applied to SAR max cap for each antenna. Reduced power level will not exceed minimum of (SAR max cap-power reduction backoff, Reg max cap).

Conducted powers were measured for each Mode/Band and applied condition. All conducted power measurements were verified to be within tolerance.

8.24 Notes for NB UNII

- The NB UNII chipset in this device is produced by two different suppliers. The electrically identical modules are manufactured with identical mechanical structure to meet the same specifications and functions. Two device variants are referenced as Variant 1 and Variant 2 in this report.
- NB UNII SAR worst case configuration was spotchecked on Variant 1 and Variant 2. The Variant with the highest reported SAR value was evaluated for the remaining NB UNII configurations.
- Full power measurements were performed for Variant 1 and Variant 2 per FCC KDB Procedures 248227.

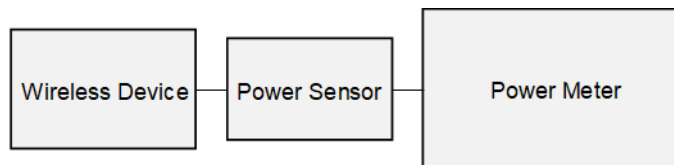


Figure 8-29

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 198 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

9 SYSTEM VERIFICATION

9.1 Tissue Verification

Table 9-1
Measured Tissue Properties

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity σ (S/m)	Measured Dielectric Constant ϵ	TARGET Conductivity σ (S/m)	TARGET Dielectric Constant ϵ	% dev σ	% dev ϵ
12/09/2024	30 Head	24.7	12	0.755	52.524	0.750	55.000	0.67%	-4.50%
			13	0.755	52.440	0.750	55.000	0.67%	-4.64%
			14	0.755	52.280	0.750	55.000	0.67%	-4.75%
			680	0.889	41.370	0.888	42.305	-3.27%	-2.21%
			695	0.884	41.320	0.889	42.227	-2.61%	-2.13%
10/31/2024	750 Head	20.4	710	0.889	41.294	0.890	42.149	-2.36%	-2.06%
			725	0.874	41.237	0.891	42.071	-1.91%	-1.98%
			750	0.882	41.150	0.894	41.942	-1.34%	-1.68%
			770	0.889	41.088	0.895	41.838	-0.67%	-1.79%
			785	0.894	41.050	0.895	41.760	-0.23%	-1.69%
			800	0.900	41.027	0.897	41.682	0.23%	-1.57%
			700	0.898	41.154	0.887	42.167	1.24%	-2.40%
			680	0.891	41.220	0.888	42.309	0.34%	-2.56%
			695	0.886	41.170	0.889	42.227	0.79%	-2.50%
			700	0.888	41.164	0.888	42.201	1.01%	-2.48%
10/31/2024	750 Head	21.4	710	0.901	41.113	0.890	42.149	1.24%	-2.46%
			725	0.900	41.096	0.891	42.071	1.68%	-2.44%
			750	0.914	40.979	0.894	41.942	2.24%	-2.30%
			770	0.921	40.920	0.895	41.838	2.91%	-2.19%
			785	0.925	40.878	0.895	41.760	3.35%	-2.11%
			800	0.931	40.820	0.887	41.682	3.79%	-2.05%
			680	0.880	40.833	0.888	42.305	-3.38%	-3.48%
			695	0.863	40.768	0.889	42.227	-2.92%	-3.46%
			710	0.864	40.740	0.889	42.201	-2.81%	-3.44%
			725	0.858	40.703	0.890	42.149	-2.47%	-3.44%
11/04/2024	750 Head	20.5	750	0.873	40.690	0.891	42.071	-2.02%	-3.38%
			770	0.880	40.600	0.894	41.942	-1.57%	-3.19%
			785	0.887	40.560	0.895	41.838	-0.89%	-3.06%
			795	0.892	40.578	0.895	41.760	-0.45%	-2.83%
			800	0.896	40.540	0.897	41.682	0.11%	-2.73%
			680	0.879	40.935	0.888	42.305	-1.01%	-3.24%
			695	0.864	40.867	0.889	42.227	-0.56%	-3.17%
			700	0.865	40.875	0.888	42.201	-0.45%	-3.14%
			710	0.868	40.844	0.890	42.149	-0.22%	-3.10%
			725	0.863	40.795	0.891	42.071	0.22%	-3.06%
11/04/2024	750 Head	20.6	750	0.902	40.682	0.894	41.942	0.89%	-3.03%
			770	0.908	40.617	0.895	41.838	1.45%	-2.92%
			785	0.914	40.584	0.895	41.760	2.01%	-2.82%
			800	0.919	40.542	0.897	41.682	2.45%	-2.72%
			680	0.878	41.363	0.888	42.305	-1.13%	-3.18%
			695	0.863	41.327	0.889	42.227	-0.67%	-3.13%
			700	0.865	41.310	0.889	42.201	-0.45%	-3.11%
			710	0.868	41.274	0.890	42.149	-0.22%	-3.08%
			725	0.863	41.237	0.891	42.071	0.22%	-3.06%
			750	0.901	41.151	0.894	41.942	0.78%	-3.09%
12/09/2024	750 Head	20.2	770	0.907	41.088	0.895	41.838	1.34%	-1.79%
			785	0.915	41.051	0.895	41.760	1.90%	-1.68%
			800	0.919	41.022	0.897	41.682	2.45%	-1.58%
			680	0.889	41.668	0.888	42.305	-3.27%	-1.51%
			695	0.864	41.620	0.889	42.227	-2.61%	-1.42%
			700	0.865	41.611	0.889	42.201	-2.59%	-1.38%
			710	0.869	41.589	0.890	42.149	-2.36%	-1.33%
			725	0.873	41.534	0.891	42.071	-2.02%	-1.28%
			750	0.881	41.459	0.894	41.942	-1.45%	-1.16%
			770	0.887	41.408	0.895	41.838	-0.89%	-1.03%
11/01/2024	835 Head	20.4	785	0.893	41.378	0.895	41.760	-0.33%	-0.91%
			800	0.898	41.341	0.897	41.682	0.11%	-0.82%
			815	0.895	40.372	0.898	41.594	-3.56%	-2.94%
			820	0.873	40.312	0.899	41.578	-3.11%	-3.04%
			835	0.885	40.121	0.900	41.500	-1.67%	-3.32%
			850	0.899	39.910	0.915	41.500	-1.66%	-3.81%
			815	0.886	40.707	0.898	41.594	-1.34%	-2.13%
			820	0.891	40.630	0.899	41.578	-0.89%	-2.27%
			835	0.905	40.415	0.900	41.500	0.67%	-2.61%
			850	0.920	40.212	0.915	41.500	0.44%	-3.30%
11/04/2024	835 Head	20.4	815	0.881	41.210	0.898	41.594	-1.89%	-0.92%
			820	0.880	41.141	0.899	41.578	-1.45%	-1.05%
			835	0.901	40.941	0.900	41.500	0.11%	-1.39%
			850	0.915	40.750	0.915	41.500	-0.11%	-1.81%
			815	0.887	40.898	0.898	41.594	-1.22%	-1.67%
			820	0.891	40.829	0.899	41.578	-0.89%	-1.80%
			835	0.904	40.620	0.900	41.500	0.67%	-2.09%
			850	0.920	40.448	0.915	41.500	0.44%	-2.53%
			1700	1.359	38.552	1.343	40.145	1.19%	-3.97%
			1705	1.363	38.515	1.345	40.141	1.34%	-4.01%
11/15/2024	1750 Head	22.2	1710	1.369	38.512	1.348	40.138	1.48%	-4.04%
			1720	1.377	38.478	1.354	40.126	1.70%	-4.11%
			1745	1.403	38.383	1.368	40.087	2.41%	-4.29%
			1750	1.440	38.285	1.371	40.078	2.55%	-4.28%
			1770	1.425	38.277	1.383	40.047	2.96%	-4.42%
			1790	1.442	38.198	1.394	40.016	3.44%	-4.54%

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 199 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ε	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ε	% dev σ	% dev ε
11/18/2024	1750 Head	22.7	1700	1.370	39.449	1.343	40.145	2.01%	-1.72%
			1705	1.376	39.432	1.345	40.141	2.23%	-1.77%
			1710	1.379	39.415	1.348	40.136	2.30%	-1.80%
			1720	1.389	39.379	1.354	40.125	2.58%	-1.86%
			1745	1.413	39.262	1.368	40.087	3.29%	-2.06%
			1750	1.410	39.230	1.371	40.079	3.43%	-2.10%
			1770	1.437	39.140	1.383	40.047	3.80%	-2.24%
			1790	1.455	39.061	1.394	40.016	4.38%	-2.39%
			1700	1.359	39.426	1.343	40.145	1.19%	-4.28%
			1705	1.363	39.403	1.345	40.141	1.34%	-4.33%
11/20/2024	1750 Head	21.7	1710	1.390	39.370	1.348	40.136	1.46%	-1.82%
			1720	1.377	39.320	1.354	40.125	1.70%	-4.49%
			1745	1.400	39.209	1.368	40.087	2.34%	-4.69%
			1750	1.405	39.195	1.371	40.079	2.48%	-4.72%
			1770	1.423	39.110	1.383	40.047	2.89%	-4.82%
			1790	1.441	39.054	1.394	40.016	3.37%	-4.90%
			1700	1.357	39.577	1.343	40.145	1.04%	-3.91%
			1705	1.361	39.563	1.345	40.141	1.19%	-3.96%
			1710	1.365	39.532	1.348	40.136	1.26%	-4.00%
			1720	1.374	39.489	1.354	40.125	1.48%	-4.07%
11/26/2024	1750 Head	23.0	1745	1.399	39.381	1.369	40.087	2.27%	-4.26%
			1750	1.400	39.360	1.371	40.079	2.48%	-4.29%
			1770	1.425	39.280	1.383	40.047	3.04%	-4.37%
			1790	1.443	39.217	1.394	40.016	3.52%	-4.50%
			1850	1.370	39.690	1.400	40.000	-2.54%	-2.27%
			1860	1.381	39.627	1.400	40.000	-3.38%	-2.43%
			1880	1.401	39.501	1.400	40.000	0.07%	-2.62%
			1900	1.421	39.873	1.400	40.000	1.56%	-2.82%
			1950	1.420	39.690	1.400	40.000	1.79%	-2.88%
			1910	1.430	39.601	1.400	40.000	2.14%	-2.92%
11/06/2024	1900 Head	23.0	1920	1.440	39.790	1.400	40.000	2.86%	-3.02%
			1850	1.311	39.649	1.400	40.000	-4.93%	-3.38%
			1860	1.341	39.588	1.400	40.000	-4.21%	-3.51%
			1880	1.361	39.500	1.400	40.000	-2.79%	-3.75%
			1900	1.381	39.422	1.400	40.000	-1.36%	-3.99%
			1905	1.387	39.406	1.400	40.000	-0.93%	-3.99%
			1910	1.392	39.385	1.400	40.000	-0.57%	-4.04%
			1920	1.401	39.346	1.400	40.000	0.07%	-4.14%
			2300	1.632	39.565	1.670	39.500	-2.28%	-2.37%
			2310	1.644	39.520	1.679	39.480	-2.08%	-2.42%
11/01/2024	2450 Head	24.5	2400	1.743	39.187	1.756	39.289	-0.74%	-2.80%
			2450	1.801	37.992	1.800	39.200	0.06%	-3.08%
			2480	1.832	37.895	1.833	39.162	-0.05%	-3.31%
			2500	1.854	37.788	1.855	39.136	-0.05%	-3.45%
			2510	1.855	37.749	1.866	39.123	-0.05%	-3.51%
			2535	1.891	37.543	1.893	39.082	-0.11%	-3.72%
			2550	1.908	37.579	1.909	39.073	-0.05%	-3.82%
			2580	1.919	37.542	1.920	39.060	-0.05%	-3.89%
			2600	1.965	37.402	1.964	39.009	0.05%	-4.12%
			2650	2.021	37.202	2.018	38.945	0.15%	-4.47%
11/02/2024	2450 Head	24.4	2680	2.056	37.061	2.051	38.907	0.24%	-4.69%
			2700	2.077	37.000	2.073	38.882	0.19%	-4.84%
			2300	1.665	39.347	1.670	39.500	-0.24%	-2.92%
			2310	1.677	39.310	1.679	39.480	-0.12%	-2.96%
			2320	1.689	39.277	1.687	39.460	0.12%	-3.00%
			2400	1.778	37.957	1.756	39.289	1.25%	-3.39%
			2450	1.838	37.791	1.800	39.200	2.00%	-3.69%
			2480	1.870	37.629	1.833	39.162	2.02%	-3.91%
			2500	1.893	37.556	1.855	39.136	2.05%	-4.03%
			2510	1.904	37.523	1.866	39.123	2.04%	-4.09%
11/04/2024	2450 Head	24.4	2535	1.933	37.426	1.893	39.082	2.11%	-4.25%
			2550	1.950	37.369	1.909	39.073	2.15%	-4.30%
			2560	1.961	37.336	1.920	39.060	2.14%	-4.44%
			2600	2.008	37.194	1.964	39.009	2.24%	-4.76%
			2300	1.633	39.445	1.670	39.500	-2.25%	-2.67%
			2310	1.643	39.409	1.679	39.480	-2.14%	-2.72%
			2320	1.654	39.371	1.687	39.460	-1.96%	-2.76%
			2400	1.743	39.072	1.756	39.289	-0.74%	-3.10%
			2450	1.799	37.884	1.800	39.200	-0.11%	-3.33%
			2480	1.830	37.766	1.833	39.162	-0.16%	-3.57%

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 200 of 255

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
11/05/2024	2450 Head	19.0	2300	1.690	39.204	1.670	39.500	1.66%	-3.28%
			2310	1.704	39.194	1.679	39.480	1.49%	-3.29%
			2320	1.711	39.179	1.687	39.460	1.42%	-3.29%
			2400	1.772	39.060	1.756	39.289	0.91%	-3.15%
			2450	1.809	37.863	1.800	39.200	0.50%	-3.10%
			2480	1.833	37.850	1.833	39.162	0.00%	-3.17%
			2500	1.846	37.886	1.856	39.136	-0.32%	-3.19%
			2510	1.857	37.873	1.866	39.123	-0.48%	-3.20%
			2535	1.877	37.859	1.893	39.092	-0.85%	-3.22%
			2550	1.889	37.817	1.909	39.073	-1.05%	-3.22%
			2600	1.897	37.852	1.920	39.060	-1.20%	-3.22%
			2600	1.931	37.731	1.964	39.009	-1.68%	-3.28%
			2650	1.973	37.642	2.018	38.945	-2.23%	-3.35%
			2680	1.995	37.519	2.051	38.907	-2.58%	-3.42%
			2700	2.015	37.339	2.073	38.882	-2.86%	-3.46%
11/13/2024	2450 Head	19.2	2300	1.698	39.267	1.670	39.500	1.68%	-3.12%
			2310	1.705	39.253	1.679	39.480	1.61%	-3.11%
			2320	1.714	39.239	1.687	39.460	1.60%	-3.09%
			2400	1.775	39.102	1.756	39.289	1.08%	-3.02%
			2450	1.814	39.036	1.800	39.200	0.78%	-2.98%
			2480	1.837	37.967	1.833	39.162	0.22%	-3.05%
			2500	1.853	37.927	1.856	39.136	-0.11%	-3.09%
			2510	1.862	37.909	1.866	39.123	-0.21%	-3.11%
			2535	1.883	37.884	1.893	39.092	-0.53%	-3.09%
			2550	1.895	37.867	1.909	39.073	-0.72%	-3.09%
			2600	1.924	37.785	1.920	39.060	-0.82%	-3.05%
			2600	1.936	37.793	1.964	39.009	-1.43%	-3.22%
			2650	1.979	37.683	2.018	38.945	-1.93%	-3.24%
			2680	1.993	37.610	2.051	38.907	-2.24%	-3.32%
			2700	2.020	37.562	2.073	38.882	-2.56%	-3.39%
11/15/2024	2450 Head	19.1	2300	1.692	39.890	1.670	39.500	1.32%	-1.65%
			2310	1.700	39.841	1.679	39.480	1.25%	-1.62%
			2320	1.709	39.833	1.687	39.460	1.24%	-1.59%
			2400	1.769	39.684	1.756	39.289	0.68%	-1.54%
			2450	1.807	39.610	1.800	39.200	0.39%	-1.49%
			2480	1.829	39.546	1.833	39.162	-0.22%	-1.57%
			2500	1.846	39.510	1.856	39.136	-0.49%	-1.60%
			2510	1.855	39.489	1.866	39.123	-0.59%	-1.62%
			2535	1.875	39.459	1.893	39.092	-0.95%	-1.62%
			2550	1.895	39.447	1.909	39.073	-1.20%	-1.60%
			2560	1.893	39.429	1.920	39.060	-1.41%	-1.62%
			2600	1.925	39.331	1.964	39.009	-1.95%	-1.74%
			2650	1.967	39.255	2.018	38.945	-2.53%	-1.77%
			2680	1.987	39.185	2.051	38.907	-3.12%	-1.86%
			2700	2.003	39.137	2.073	38.882	-3.38%	-1.92%
11/20/2024	2450 Head	24.6	2300	1.704	39.147	1.670	39.500	2.04%	-0.89%
			2310	1.718	39.111	1.679	39.480	2.14%	-0.93%
			2320	1.725	39.074	1.687	39.460	2.31%	-0.98%
			2400	1.818	39.770	1.756	39.289	3.63%	1.32%
			2450	1.873	39.581	1.800	39.200	4.06%	1.58%
			2480	1.910	39.462	1.833	39.162	4.20%	1.79%
			2500	1.935	39.380	1.856	39.136	4.31%	1.93%
			2510	1.946	39.342	1.866	39.123	4.29%	2.00%
			2535	1.974	39.245	1.893	39.092	4.28%	2.17%
			2550	1.990	39.181	1.909	39.073	4.24%	2.28%
			2600	2.001	39.139	1.920	39.060	4.22%	2.36%
			2600	2.051	37.965	1.964	39.009	4.43%	2.68%
			2650	2.106	37.794	2.018	38.945	4.46%	3.03%
			2680	2.143	37.645	2.051	38.907	4.49%	3.24%
			2700	2.166	37.556	2.073	38.882	4.49%	3.41%
11/06/2024	3600 Head	20.0	3300	2.625	39.695	2.708	38.157	-3.06%	1.31%
			3350	2.670	39.490	2.759	38.100	-3.23%	1.04%
			3450	2.749	39.339	2.861	37.986	-3.91%	0.92%
			3500	2.807	39.237	2.913	37.929	-3.64%	0.81%
			3550	2.845	39.146	2.964	37.871	-4.01%	0.73%
			3600	2.866	39.100	2.974	37.860	-3.97%	0.63%
			3600	2.900	38.060	3.015	37.814	-3.81%	0.62%
			3650	2.943	37.974	3.066	37.757	-4.01%	0.57%
			3690	2.990	37.894	3.107	37.711	-3.77%	0.41%
			3700	3.002	37.843	3.117	37.700	-3.69%	0.38%
			3750	3.050	37.756	3.169	37.643	-3.66%	0.42%
			3900	3.217	37.515	3.323	37.471	-3.19%	0.12%
			3935	3.253	37.452	3.353	37.437	-2.58%	0.15%
			4100	3.431	37.219	3.528	37.243	-2.66%	-0.07%
			4150	3.482	37.214	3.579	37.186	-2.71%	0.08%

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 201 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
11/06/2024	3600 Head	19.0	3300	2.688	37.276	2.708	38.157	-0.74%	-2.31%
			3350	2.734	37.223	2.759	38.100	-0.91%	-2.30%
			3400	2.821	37.098	2.861	37.886	-1.40%	-2.44%
			3500	2.864	36.866	2.913	37.629	-2.03%	-2.35%
			3550	2.904	36.884	2.964	37.871	-2.02%	-2.61%
			3560	2.909	36.854	2.974	37.860	-2.29%	-2.63%
			3600	2.941	36.794	3.015	37.814	-2.45%	-2.70%
			3650	2.990	36.703	3.066	37.757	-2.48%	-2.75%
			3690	3.016	36.633	3.107	37.711	-2.96%	-2.86%
			3700	3.026	36.614	3.117	37.700	-2.92%	-2.88%
			3750	3.076	36.543	3.168	37.643	-2.87%	-2.93%
			3900	3.217	36.314	3.323	37.471	-3.29%	-3.09%
			3930	3.248	36.262	3.353	37.437	-3.13%	-3.09%
			4100	3.406	36.075	3.526	37.243	-3.46%	-3.24%
			4150	3.443	36.020	3.579	37.186	-3.60%	-3.16%
11/09/2024	3600 Head	19.0	3300	2.712	37.200	2.708	38.157	0.15%	-2.50%
			3350	2.740	37.080	2.759	38.100	-0.36%	-2.69%
			3400	2.830	36.938	2.861	37.886	-1.08%	-2.76%
			3500	2.879	36.869	2.913	37.629	-1.17%	-2.80%
			3550	2.917	36.793	2.964	37.871	-1.59%	-2.85%
			3560	2.926	36.767	2.974	37.860	-1.61%	-2.91%
			3600	2.961	36.700	3.015	37.814	-1.79%	-2.93%
			3650	3.004	36.645	3.066	37.757	-2.02%	-2.95%
			3690	3.043	36.573	3.107	37.711	-2.06%	-3.02%
			3700	3.053	36.565	3.117	37.700	-2.05%	-3.05%
			3750	3.093	36.490	3.168	37.643	-2.40%	-3.07%
			3900	3.236	36.270	3.323	37.471	-2.62%	-3.21%
			3930	3.262	36.210	3.353	37.437	-2.71%	-3.26%
			4100	3.427	36.066	3.526	37.243	-2.86%	-3.45%
			4150	3.469	36.020	3.579	37.186	-3.07%	-3.40%
11/24/2024	3600 Head	19.0	3300	2.633	38.489	2.708	38.157	-2.77%	0.87%
			3350	2.677	38.399	2.759	38.100	-2.97%	0.79%
			3400	2.760	38.220	2.861	37.886	-3.13%	0.64%
			3500	2.809	38.089	2.913	37.629	-3.71%	0.42%
			3550	2.857	38.018	2.964	37.871	-3.61%	0.39%
			3560	2.867	37.998	2.974	37.860	-3.62%	0.36%
			3600	2.905	37.926	3.015	37.814	-3.63%	0.30%
			3650	2.964	37.825	3.066	37.757	-3.65%	0.18%
			3690	2.998	37.742	3.107	37.711	-3.51%	0.08%
			3700	3.009	37.721	3.117	37.700	-3.46%	0.06%
			3750	3.067	37.629	3.168	37.643	-3.22%	-0.04%
			3900	3.224	37.386	3.323	37.471	-2.98%	0.20%
			3930	3.262	37.342	3.353	37.437	-2.71%	0.25%
			4100	3.442	37.070	3.526	37.243	-2.44%	0.45%
			4150	3.484	37.004	3.579	37.186	-2.37%	0.49%
11/07/2024	5200-5800 Head	19.0	5130	4.440	34.953	4.608	36.050	-3.45%	-3.04%
			5150	4.455	34.943	4.618	36.040	-3.51%	-3.04%
			5170	4.462	34.927	4.629	36.030	-3.61%	-3.06%
			5180	4.473	34.906	4.635	36.009	-3.60%	-3.07%
			5190	4.485	34.877	4.645	35.988	-3.44%	-3.11%
			5200	4.497	34.858	4.655	35.966	-3.37%	-3.12%
			5210	4.509	34.848	4.665	35.975	-3.36%	-3.13%
			5220	4.520	34.830	4.676	35.963	-3.34%	-3.15%
			5240	4.545	34.785	4.696	35.940	-3.19%	-3.22%
			5250	4.555	34.765	4.706	35.929	-3.11%	-3.24%
			5260	4.563	34.758	4.717	35.917	-3.26%	-3.23%
			5270	4.572	34.743	4.727	35.906	-3.28%	-3.24%
			5280	4.584	34.711	4.737	35.884	-3.20%	-3.28%
			5290	4.595	34.680	4.748	35.883	-3.20%	-3.32%
			5300	4.606	34.673	4.758	35.871	-3.19%	-3.34%
			5310	4.616	34.669	4.768	35.860	-3.19%	-3.35%
			5320	4.623	34.644	4.778	35.849	-3.16%	-3.36%
			5330	4.627	34.621	4.963	35.643	-2.74%	-3.71%
			5510	4.836	34.306	4.973	35.632	-2.79%	-3.72%
			5520	4.845	34.288	4.983	35.620	-2.79%	-3.74%
			5530	4.860	34.257	4.994	35.609	-2.68%	-3.80%
			5540	4.872	34.227	5.004	35.597	-2.64%	-3.89%
			5550	4.881	34.200	5.014	35.586	-2.65%	-3.89%
			5560	4.889	34.180	5.024	35.574	-2.69%	-3.88%
			5580	4.913	34.179	5.045	35.551	-2.62%	-3.86%
			5600	4.936	34.126	5.065	35.529	-2.65%	-3.94%
			5610	4.949	34.110	5.076	35.518	-2.60%	-3.95%
			5620	4.962	34.100	5.086	35.506	-2.44%	-4.06%
			5640	4.987	34.045	5.106	35.483	-2.53%	-4.05%
			5660	5.012	34.000	5.127	35.460	-2.24%	-4.12%
			5670	5.022	33.994	5.137	35.449	-2.24%	-4.10%
			5680	5.029	33.984	5.147	35.437	-2.29%	-4.10%
			5690	5.038	33.972	5.158	35.426	-2.33%	-4.10%
			5700	5.052	33.952	5.168	35.414	-2.24%	-4.13%
			5710	5.066	33.934	5.178	35.403	-2.16%	-4.15%
			5720	5.076	33.913	5.188	35.391	-2.16%	-4.18%
			5745	5.104	33.863	5.214	35.363	-2.11%	-4.28%
			5750	5.109	33.842	5.219	35.357	-2.11%	-4.28%
			5765	5.114	33.830	5.224	35.351	-2.11%	-4.29%
			5765	5.114	33.810	5.234	35.340	-2.10%	-4.31%
			5775	5.114	33.759	5.245	35.329	-2.12%	-4.35%
			5785	5.147	33.769	5.255	35.317	-2.06%	-4.39%
			5795	5.159	33.772	5.265	35.305	-2.03%	-4.34%
			5800	5.163	33.760	5.270	35.300	-2.03%	-4.36%
			5805	5.168	33.753	5.275	35.294	-2.03%	-4.37%
			5825	5.188	33.724	5.295	35.271	-2.08%	-4.39%
			5835	5.197	33.714	5.305	35.260	-2.04%	-4.30%
			5845	5.208	33.696	5.315	35.210	-2.01%	-4.29%
			5850	5.215	33.691	5.320	35.200	-1.97%	-4.29%
			5865	5.221	33.680	5.325	35.197	-1.86%	-4.11%
			5865	5.217	33.653	5.336	35.180	-1.86%	-4.37%
			5875	5.250	33.620	5.347	35.183	-1.81%	-4.43%
			5885	5.261	33.603	5.357	35.177	-1.79%	-4.47%
			5905	5.285	33.574	5.379	35.163	-1.64%	-4.62%

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 202 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ'	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ'	% dev σ	% dev ϵ'
11/14/2024	5200-5800 Head	19.7	5150	4.611	34.890	4.608	36.050	0.07%	-3.22%
			5160	4.624	34.874	4.618	36.040	0.13%	-3.24%
			5170	4.644	34.852	4.629	36.030	0.26%	-3.27%
			5180	4.662	34.823	4.635	36.020	0.37%	-3.30%
			5190	4.682	34.792	4.645	35.998	0.37%	-3.33%
			5200	4.674	34.780	4.655	35.986	0.41%	-3.33%
			5210	4.688	34.767	4.666	35.975	0.43%	-3.30%
			5220	4.695	34.775	4.676	35.963	0.41%	-3.30%
			5240	4.713	34.768	4.696	35.940	0.36%	-3.43%
			5250	4.725	34.695	4.706	35.929	0.40%	-3.43%
			5260	4.726	34.682	4.712	35.917	0.38%	-3.42%
			5270	4.744	34.678	4.727	35.906	0.36%	-3.42%
			5280	4.757	34.660	4.737	35.894	0.42%	-3.44%
			5290	4.769	34.626	4.748	35.883	0.44%	-3.50%
			5300	4.782	34.598	4.768	35.871	0.50%	-3.55%
			5310	4.790	34.576	4.768	35.860	0.46%	-3.58%
			5320	4.788	34.571	4.778	35.849	0.42%	-3.56%
			5600	4.993	34.262	4.963	35.543	0.60%	-3.87%
			5610	5.004	34.248	4.973	35.632	0.62%	-3.88%
			5620	5.016	34.233	4.983	35.620	0.64%	-3.89%
			5630	5.024	34.215	4.994	35.609	0.60%	-3.91%
			5640	5.035	34.187	5.004	35.597	0.62%	-3.93%
			5650	5.049	34.180	5.014	35.586	0.70%	-3.95%
			5660	5.058	34.159	5.024	35.574	0.68%	-3.98%
			5680	5.073	34.141	5.046	35.551	0.66%	-3.97%
			5690	5.105	34.082	5.065	35.529	0.81%	-4.04%
			5630	5.116	34.076	5.076	35.518	0.79%	-4.06%
			5620	5.126	34.063	5.086	35.506	0.79%	-4.06%
			5640	5.135	34.024	5.106	35.493	0.66%	-4.12%
			5660	5.170	33.976	5.127	35.460	0.84%	-4.18%
			5680	5.186	33.969	5.147	35.437	0.74%	-4.14%
			5690	5.199	33.942	5.168	35.426	0.79%	-4.19%
			5700	5.210	33.913	5.168	35.414	0.93%	-4.24%
			5710	5.229	33.889	5.178	35.403	0.98%	-4.26%
			5720	5.239	33.880	5.188	35.391	0.98%	-4.24%
			5740	5.266	33.846	5.214	35.363	1.00%	-4.29%
			5750	5.272	33.826	5.218	35.357	1.02%	-4.30%
			5765	5.276	33.830	5.224	35.351	1.00%	-4.30%
			5768	5.285	33.818	5.234	35.340	0.97%	-4.31%
			5775	5.298	33.800	5.245	35.329	1.01%	-4.32%
			5785	5.309	33.780	5.265	35.317	1.03%	-4.33%
			5795	5.319	33.756	5.265	35.305	1.03%	-4.33%
			5800	5.323	33.747	5.270	35.300	1.01%	-4.40%
			5805	5.327	33.742	5.275	35.294	0.99%	-4.40%
			5825	5.362	33.714	5.296	35.271	1.06%	-4.41%
			5835	5.364	33.704	5.305	35.260	1.11%	-4.33%
			5845	5.376	33.682	5.316	35.210	1.15%	-4.31%
			5860	5.381	33.689	5.320	35.200	1.15%	-4.29%
			5865	5.388	33.682	5.325	35.197	1.18%	-4.30%
			5865	5.395	33.682	5.336	35.190	1.11%	-4.34%
			5875	5.407	33.632	5.347	35.181	1.12%	-4.41%
			5885	5.417	33.607	5.357	35.177	1.12%	-4.46%
			5905	5.437	33.569	5.379	35.163	1.08%	-4.54%
			5915	5.174	34.696	5.411	35.143	-4.38%	-1.96%
			5970	5.208	34.628	5.448	35.120	-4.41%	-1.27%
			5985	5.230	34.618	5.464	35.110	-4.28%	-1.41%
			6000	5.250	34.588	5.480	35.100	-4.20%	-1.52%
			6025	5.268	34.496	5.510	35.070	-4.01%	-1.66%
			6065	5.346	34.419	5.557	35.022	-3.80%	-1.72%
			6075	5.360	34.407	5.569	35.010	-3.79%	-1.72%
			6085	5.374	34.390	5.580	34.998	-3.69%	-1.74%
			6105	5.487	34.222	5.688	34.878	-3.70%	-1.68%
			6275	5.609	34.002	5.805	34.770	-3.38%	-2.21%
			6285	5.621	33.993	5.816	34.758	-3.35%	-2.20%
			6305	5.645	33.998	5.840	34.734	-3.34%	-2.20%
			6345	5.679	33.943	5.887	34.686	-3.53%	-2.15%
			6475	5.636	33.680	6.041	34.630	-3.39%	-2.43%
			6485	5.847	33.669	6.052	34.618	-3.39%	-2.46%
			6500	5.985	33.636	6.070	34.600	-3.39%	-2.50%
			6505	5.971	33.627	6.076	34.494	-3.37%	-2.51%
			6545	5.923	33.556	6.122	34.446	-3.25%	-2.58%
			6565	5.987	33.547	6.205	34.302	-3.26%	-2.78%
			6675	6.061	33.332	6.273	34.250	-3.05%	-2.79%
			6685	6.093	33.307	6.285	34.278	-3.09%	-2.83%
			6715	6.123	33.221	6.319	34.242	-3.10%	-2.98%
			6785	6.192	33.188	6.400	34.158	-3.25%	-3.30%
			6825	6.243	33.070	6.447	34.110	-3.18%	-3.10%
			6985	6.444	32.775	6.633	33.918	-2.85%	-3.37%
			6995	6.455	32.768	6.644	33.906	-2.84%	-3.38%
			7000	6.460	32.760	6.650	33.900	-2.86%	-3.39%
			7005	6.465	32.763	6.666	33.894	-2.87%	-3.34%
			7025	6.494	32.712	6.680	33.870	-2.78%	-3.42%
			7500	7.071	31.849	7.240	33.300	-2.33%	-4.36%

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB Publication 865664 D01v01r04 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

Note: Per April 2019 TCB Workshop Notes, single head-tissue simulating liquid specified in IEC 62209-1 is permitted to use for all SAR tests.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 203 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

9.2 Test System Verification

Prior to SAR assessment, the system is verified to $\pm 10\%$ of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in the SAR System Validation Appendix.

Table 9-2
System Verification Results

System Verification TARGET & MEASURED																	
SAR System	Tissue Frequency (MHz)	Tissue Type	Date	Amb. Temp. (C)	Liquid Temp. (C)	Input Power (W)	Source SN	Probe SN	DAE	Measured SAR 1g (W/kg)	1W Target SAR 1g (W/kg)	1W Normalized SAR 1g (W/kg)	Deviation 1g (%)	Measured 4cm2 APD (W/m2)	1W Target 4cm2 APD (W/m2)	1W Normalized 4cm2 APD	Deviation 4cm2 APD (%)
AM14	13	HEAD	12/09/2024	21.3	23.8	1.00	1004	7308	534	0.544	0.575	0.544	-5.39%				
AM1	750	HEAD	10/31/2024	22.3	20.6	0.20	1057	7416	701	1.710	8.510	8.550	0.47%				
AM11	750	HEAD	10/31/2024	22.0	21.0	0.20	1097	7532	501	1.740	8.270	8.700	5.20%				
AM1	750	HEAD	11/04/2024	22.6	20.3	0.20	1057	7416	701	1.570	8.510	7.850	-7.76%				
AM11	750	HEAD	11/04/2024	21.0	20.6	0.20	1097	7532	501	1.760	8.270	8.800	6.41%				
AM1	750	HEAD	11/08/2024	22.9	21.0	0.20	1057	7416	701	1.690	8.510	8.450	-0.71%				
AM11	750	HEAD	12/09/2024	20.9	20.1	0.20	1097	7532	501	1.590	8.270	7.950	-3.87%				
AM13	835	HEAD	11/01/2024	21.2	20.0	0.20	460	7682	1683	1.930	9.720	9.650	-0.72%				
AM13	835	HEAD	11/04/2024	21.1	20.7	0.20	460	7682	1683	2.030	9.720	10.150	4.42%				
AM13	835	HEAD	11/06/2024	21.2	20.7	0.20	460	7682	1683	2.040	9.720	10.200	4.94%				
AM13	835	HEAD	11/11/2024	20.2	20.0	0.20	460	7682	1683	2.030	9.720	10.150	4.42%				
AM14	1750	HEAD	11/15/2024	23.0	20.3	0.10	1083	7360	534	3.760	36.500	37.600	3.01%				
AM14	1750	HEAD	11/18/2024	21.1	20.9	0.10	1083	7360	534	3.470	36.500	34.700	-4.93%				
AM14	1750	HEAD	11/20/2024	21.1	20.6	0.10	1083	7360	534	3.700	36.500	37.000	1.37%				
AM14	1750	HEAD	11/26/2024	21.9	22.0	0.10	1083	7360	534	3.470	36.500	34.700	-4.93%				
AM7	1900	HEAD	11/04/2024	21.0	20.4	0.10	50181	7421	604	4.070	39.900	40.700	2.01%				
AM7	1900	HEAD	11/06/2024	22.7	21.4	0.10	50181	7421	604	3.980	39.900	39.800	-0.25%				
AM10	2300	HEAD	11/02/2024	23.1	22.8	0.10	1038	7546	1402	4.830	49.100	48.300	-1.63%				
AM10	2300	HEAD	11/04/2024	22.8	22.8	0.10	1038	7546	1402	4.940	49.100	49.400	0.61%				
AM16	2450	HEAD	11/01/2024	22.0	23.5	0.10	750	7552	1676	5.090	52.600	50.900	-3.23%				
AM6	2450	HEAD	11/05/2024	19.8	19.2	0.10	750	7639	1403	5.210	52.600	52.100	-0.95%				
AM6	2450	HEAD	11/13/2024	20.3	19.9	0.10	921	7639	1403	5.420	52.200	54.200	3.83%				
AM6	2450	HEAD	11/15/2024	21.4	20.5	0.10	750	7639	1403	5.350	52.600	53.500	1.71%				
AM16	2450	HEAD	11/20/2024	22.0	22.9	0.10	750	7552	1676	5.150	52.600	51.500	-2.09%				
AM16	2600	HEAD	11/01/2024	22.0	23.5	0.10	1042	7552	1676	5.560	55.800	55.600	-0.36%				
AM16	2600	HEAD	11/20/2024	22.0	22.9	0.10	1042	7552	1676	5.760	55.800	57.600	3.23%				
AM4	3500	HEAD	11/06/2024	23.5	21.0	0.10	1126	7357	1582	6.660	66.200	66.600	0.60%				
AM3	3500	HEAD	11/06/2024	23.4	20.6	0.10	1126	7668	1681	6.970	66.200	69.700	5.29%				
AM3	3500	HEAD	11/09/2024	23.3	20.6	0.10	1126	7668	1681	6.840	66.200	68.400	3.32%				
AM4	3500	HEAD	11/24/2024	21.0	20.0	0.10	1126	7357	1582	6.670	66.200	66.700	0.76%				
AM4	3700	HEAD	11/06/2024	23.5	21.0	0.10	1097	7357	1582	6.300	67.900	63.000	-7.22%				
AM3	3700	HEAD	11/06/2024	23.4	20.6	0.10	1097	7668	1681	7.000	67.900	70.000	3.09%				
AM2	3700	HEAD	11/09/2024	23.3	20.6	0.10	1097	7668	1681	6.970	67.900	69.700	2.65%				
AM4	3700	HEAD	11/24/2024	21.0	20.0	0.10	1097	7357	1582	6.680	67.900	66.800	-1.62%				
AM3	3900	HEAD	11/06/2024	23.4	20.6	0.10	1056	7668	1681	7.230	68.200	72.300	6.01%				
AM3	3900	HEAD	11/09/2024	23.3	20.6	0.10	1056	7668	1681	6.990	68.200	69.900	2.49%				
AM9	5250	HEAD	11/07/2024	22.8	20.9	0.05	1163	7782	1646	3.860	79.600	77.200	-3.02%				
AM8	5250	HEAD	11/14/2024	21.1	19.1	0.05	1123	7427	467	3.810	79.400	76.200	-4.03%				
AM9	5600	HEAD	11/07/2024	22.8	20.9	0.05	1163	7782	1646	4.050	82.800	81.000	-2.17%				
AM8	5600	HEAD	11/14/2024	21.1	19.1	0.05	1123	7427	467	4.030	82.500	80.600	-2.30%				
AM9	5750	HEAD	11/07/2024	22.8	20.9	0.05	1163	7782	1646	4.010	81.100	80.200	-1.11%				
AM8	5750	HEAD	11/14/2024	21.1	19.1	0.05	1123	7427	467	3.690	79.400	73.800	-7.05%				
AM9	5850	HEAD	11/07/2024	22.8	20.9	0.05	1163	7782	1646	3.980	79.000	79.600	0.76%				
AM8	5850	HEAD	11/14/2024	21.1	19.1	0.05	1123	7427	467	4.050	80.100	81.000	1.12%				
AM2	6500	HEAD	11/01/2024	21.2	19.8	0.03	1019	3949	1684	7.810	300.000	312.400	4.13%	35.1	1340	35.4	5.67%

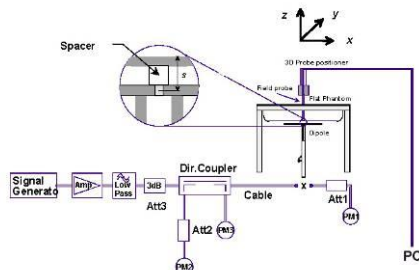


Figure 9-1
System Verification Setup Diagram



Figure 9-2
System Verification Setup Photo

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 204 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

9.3 Power Density Test System Verification

The system was verified to be within ± 0.66 dB of the power density targets on the calibration certificate according to the test system specification in the user's manual and calibration facility recommendation. The 0.66 dB deviation threshold represents the expanded uncertainty for system performance checks using SPEAG's mmWave verification sources. The same spatial resolution and measurement region used in the source calibration was applied during the system check.

The measured power density distribution of verification source was also confirmed through visual inspection to have no noticeable differences, both spatially (shape) and numerically (level) from the distribution provided by the manufacturer, per November 2017 TCBC Workshop Notes.

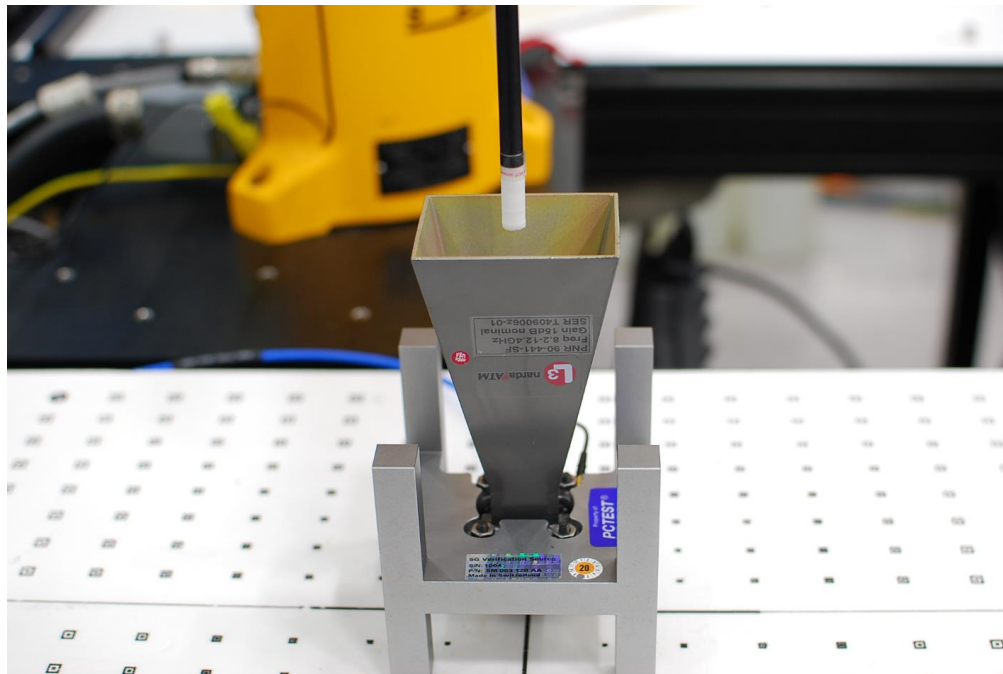


Figure 9-3
System Verification Setup Photo

Table 9-3
10 GHz Verification Results

System Verification											
System	Frequency (GHz)	Date	Source S/N	Probe S/N	Prad (mW)	Normal psPD (W/m ² over 4 cm ²)		Deviation (dB)	Total psPD (W/m ² over 4 cm ²)		Deviation (dB)
						Measured	Target		Measured	Target	
AM5	10	11/07/2024	1004	9487	93.3	57.40	56.70	0.05	57.60	56.90	0.05

Note: A **10 mm distance spacing** was used from the reference horn antenna aperture to the probe element.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 205 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

10 SAR DATA SUMMARY

10.1 UMTS 850 Standalone SAR

Table 10-1 Antenna 2

Exposure	Band / Mode	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #	Plimit [dBm]	Overall Plimit [dBm]
Body	UMTS 850	RMC	2	L4HWV	1:1	0.00	826.40	4132	19.90	18.95	Back	0	0.744	0.363	1.245	0.926	0.452	0.579		19.2	
Body	UMTS 850	RMC	2	L4HWV	1:1	0.00	836.60	4183	19.90	19.14	Back	0	0.717	0.349	1.191	0.854	0.416	0.534		19.6	
Body	UMTS 850	RMC	2	L4HWV	1:1	0.02	846.60	4233	19.90	19.12	Back	0	0.659	0.322	1.197	0.789	0.385	0.493		19.9	
Body	UMTS 850	RMC	2	L4HWV	1:1	0.03	836.60	4183	19.90	19.14	Top	0	0.032	0.014	1.191	0.038	0.017	0.024		33.1	
Body	UMTS 850	RMC	2	L4HWV	1:1	0.00	826.40	4132	19.90	18.95	Bottom	0	0.691	0.274	1.245	0.860	0.341	0.538		19.5	
Body	UMTS 850	RMC	2	L4HWV	1:1	-0.04	836.60	4183	19.90	19.14	Bottom	0	0.713	0.282	1.191	0.849	0.336	0.531		19.6	
Body	UMTS 850	RMC	2	L4HWV	1:1	-0.01	846.60	4233	19.90	19.12	Bottom	0	0.722	0.286	1.197	0.864	0.342	0.540		19.5	
Body	UMTS 850	RMC	2	L4HWV	1:1	-0.01	826.40	4132	19.90	18.95	Right	0	0.788	0.305	1.245	0.981	0.380	0.613		19.0	
Body	UMTS 850	RMC	2	L4HWV	1:1	0.00	836.60	4183	19.90	19.14	Right	0	0.828	0.319	1.191	0.986	0.380	0.616		18.9	
Body	UMTS 850	RMC	2	L4HWV	1:1	-0.03	846.60	4233	19.90	19.12	Right	0	0.807	0.319	1.197	0.966	0.382	0.604		19.0	
Body	UMTS 850	RMC	2	L4HWV	1:1	0.05	836.60	4183	19.90	19.14	Left	0	0.037	0.018	1.191	0.044	0.021	0.028		32.4	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Body 1.6 W/kg (mW/g) averaged over 1 gram									

Table 10-2 Antenna 4

Exposure	Band / Mode	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #	Plimit [dBm]	Overall Plimit [dBm]
Body	UMTS 850	RMC	4	L4HWV	1:1	0.00	826.40	4132	20.00	19.20	Back	0	0.784	0.364	1.202	0.942	0.438	0.589		19.2	
Body	UMTS 850	RMC	4	L4HWV	1:1	-0.01	836.60	4183	20.00	19.34	Back	0	0.748	0.348	1.164	0.871	0.405	0.544		19.6	
Body	UMTS 850	RMC	4	L4HWV	1:1	-0.02	846.60	4233	20.00	19.36	Back	0	0.693	0.323	1.159	0.803	0.374	0.502		19.9	
Body	UMTS 850	RMC	4	L4HWV	1:1	0.03	826.40	4132	20.00	19.20	Top	0	0.721	0.289	1.202	0.867	0.347	0.542		19.6	
Body	UMTS 850	RMC	4	L4HWV	1:1	-0.01	836.60	4183	20.00	19.34	Top	0	0.739	0.295	1.164	0.860	0.343	0.538		19.6	
Body	UMTS 850	RMC	4	L4HWV	1:1	0.03	846.60	4233	20.00	19.36	Top	0	0.752	0.300	1.159	0.872	0.348	0.545		19.6	
Body	UMTS 850	RMC	4	L4HWV	1:1	0.18	846.60	4233	20.00	19.36	Bottom	0	0.034	0.015	1.159	0.039	0.017	0.024		33.0	
Body	UMTS 850	RMC	4	L4HWV	1:1	0.04	846.60	4233	20.00	19.36	Right	0	0.053	0.026	1.159	0.061	0.030	0.038		31.1	
Body	UMTS 850	RMC	4	L4HWV	1:1	0.00	826.40	4132	20.00	19.20	Left	0	0.791	0.310	1.202	0.951	0.373	0.594		19.2	
Body	UMTS 850	RMC	4	L4HWV	1:1	0.00	836.60	4183	20.00	19.34	Left	0	0.829	0.324	1.164	0.965	0.377	0.603	A1	19.1	
Body	UMTS 850	RMC	4	L4HWV	1:1	0.01	846.60	4233	20.00	19.36	Left	0	0.819	0.326	1.159	0.949	0.378	0.593		19.2	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Body 1.6 W/kg (mW/g) averaged over 1 gram									

10.2 UMTS 1750 Standalone SAR

Table 10-3 Antenna 1b

Exposure	Band / Mode	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #	Plimit [dBm]	Overall Plimit [dBm]
Body	UMTS 1750	RMC	1b	Q97RL	1:1	-0.04	1712.40	1312	12.50	12.22	Back	0	0.813	0.315	1.067	0.867	0.336	0.542		12.1	
Body	UMTS 1750	RMC	1b	Q97RL	1:1	-0.06	1732.40	1412	12.50	12.14	Back	0	0.848	0.327	1.086	0.921	0.355	0.576		11.8	
Body	UMTS 1750	RMC	1b	Q97RL	1:1	-0.01	1752.60	1513	12.50	12.18	Back	0	0.851	0.323	1.076	0.916	0.348	0.573	A2	11.9	
Body	UMTS 1750	RMC	1b	Q97RL	1:1	0.01	1712.40	1312	12.50	12.22	Top	0	0.000	0.000	1.067	0.000	0.000	0.000		51.2	
Body	UMTS 1750	RMC	1b	Q97RL	1:1	-0.03	1712.40	1312	12.50	12.22	Bottom	0	0.636	0.225	1.067	0.679	0.240	0.424		13.2	
Body	UMTS 1750	RMC	1b	Q97RL	1:1	0.03	1712.40	1312	12.50	12.22	Right	0	0.009	0.003	1.067	0.010	0.003	0.006		31.7	
Body	UMTS 1750	RMC	1b	Q97RL	1:1	0.03	1712.40	1312	12.50	12.22	Left	0	0.034	0.014	1.067	0.036	0.015	0.023		25.9	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Body 1.6 W/kg (mW/g) averaged over 1 gram									

Table 10-4 Antenna 2

Exposure	Band / Mode	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #	Plimit [dBm]	Overall Plimit [dBm]
Body	UMTS 1750	RMC	2	Q91JW	1:1	0.00	1712.40	1312	15.50	14.82	Back	0	0.827	0.345	1.169	0.967	0.403	0.604		14.6	
Body	UMTS 1750	RMC	2	Q91JW	1:1	0.01	1732.40	1412	15.50	14.77	Back	0	0.822	0.349	1.183	0.972	0.413	0.608		14.6	
Body	UMTS 1750	RMC	2	Q91JW	1:1	0.04	1752.60	1513	15.50	14.81	Back	0	0.739	0.317	1.172	0.866	0.372	0.541		15.1	
Body	UMTS 1750	RMC	2	Q91JW	1:1	0.01	1712.40	1312	15.50	14.82	Top	0	0.000	0.000	1.169	0.000	0.000	0.000		53.8	
Body	UMTS 1750	RMC	2	Q91JW	1:1	-0.02	1712.40	1312	15.50	14.82	Bottom	0	0.327	0.128	1.169	0.382	0.150	0.239		18.7	
Body	UMTS 1750	RMC	2	Q91JW	1:1	0.00	1712.40	1312	15.50	14.82	Right	0	0.717	0.230	1.169	0.838	0.269	0.524		15.2	
Body	UMTS 1750	RMC	2	Q91JW	1:1	0.05	1732.40	1412	15.50	14.77	Right	0	0.754	0.249	1.183	0.892	0.295	0.558		15.0	
Body	UMTS 1750	RMC	2	Q91JW	1:1	0.02	1752.60	1513	15.50	14.81	Right	0	0.736	0.243	1.172	0.863	0.285	0.539		15.1	
Body	UMTS 1750	RMC	2	Q91JW	1:1	0.04	1712.40	1312	15.50	14.82	Left	0	0.002	0.000	1.169	0.002	0.000	0.001		40.8	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Body 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 206 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 10-5 Antenna 3b

Exposure	Band / Mode	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #	Plimit [dBm]	Overall Plimit [dBm]		
Body	UMTS 1750	RMC	3b	27WT9	1:1	-0.02	1752.60	1513	12.90	11.45	Back	0	0.280	0.116	1.396	0.391	0.162	0.244			16.0	12.1	
Body	UMTS 1750	RMC	3b	27WT9	1:1	-0.02	1712.40	1312	12.90	11.38	Top	0	0.635	0.228	1.419	0.901	0.324	0.563			12.3		
Body	UMTS 1750	RMC	3b	27WT9	1:1	-0.02	1732.40	1412	12.90	11.39	Top	0	0.666	0.238	1.415	0.943	0.337	0.589			12.1		
Body	UMTS 1750	RMC	3b	27WT9	1:1	0.01	1752.60	1513	12.90	11.45	Top	0	0.677	0.243	1.396	0.945	0.339	0.591			12.1		
Body	UMTS 1750	RMC	3b	27WT9	1:1	0.05	1752.60	1513	12.90	11.45	Bottom	0	0.000	0.000	1.396	0.000	0.000	0.000			50.4		
Body	UMTS 1750	RMC	3b	27WT9	1:1	0.09	1752.60	1513	12.90	11.45	Right	0	0.029	0.012	1.396	0.040	0.017	0.025			25.8		
Body	UMTS 1750	RMC	3b	27WT9	1:1	-0.10	1752.60	1513	12.90	11.45	Left	0	0.009	0.003	1.396	0.013	0.004	0.008			30.9		
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Body 1.6 W/kg (mW/g) averaged over 1 gram											

Table 10-6 Antenna 4

Exposure	Band / Mode	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #	Plimit [dBm]	Overall Plimit [dBm]
Body	UMTS 1750	RMC	4	Q97RL	1:1	-0.01	1752.60	1513	15.30	14.65	Back	0	0.659	0.280	1.161	0.765	0.325	0.478			15.4
Body	UMTS 1750	RMC	4	Q97RL	1:1	0.04	1752.60	1513	15.30	14.65	Top	0	0.525	0.203	1.161	0.610	0.236	0.381			16.4
Body	UMTS 1750	RMC	4	Q97RL	1:1	0.04	1752.60	1513	15.30	14.65	Bottom	0	0.006	0.002	1.161	0.007	0.002	0.004			35.8
Body	UMTS 1750	RMC	4	Q97RL	1:1	0.02	1752.60	1513	15.30	14.65	Right	0	0.003	0.000	1.161	0.003	0.000	0.002			38.9
Body	UMTS 1750	RMC	4	Q97RL	1:1	0.00	1712.40	1312	15.30	14.60	Left	0	0.728	0.262	1.175	0.855	0.308	0.534			15.0
Body	UMTS 1750	RMC	4	Q97RL	1:1	-0.04	1732.40	1412	15.30	14.44	Left	0	0.740	0.261	1.219	0.902	0.318	0.564			14.7
Body	UMTS 1750	RMC	4	Q97RL	1:1	-0.02	1752.60	1513	15.30	14.65	Left	0	0.747	0.268	1.161	0.867	0.311	0.542			14.9
ANSI/IEEE C95.1 1992 - SAFETY LIMIT												Body									
Spatial Peak												1.6 W/kg (mW/g)									
Uncontrolled Exposure/General Population												averaged over 1 gram									

10.3 UMTS 1900 Standalone SAR

Table 10-7 Antenna 1b

Exposure	Band / Mode	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #	Plimit [dBm]	Overall Plimit [dBm]	
Body	UMTS 1900	RMC	1b	Q96KN	1:1	-0.06	1852.40	9262	12.30	12.11	Back	0	0.799	0.312	1.045	0.835	0.326	0.522			12.1	11.5
Body	UMTS 1900	RMC	1b	Q96KN	1:1	-0.03	1880.00	9400	12.30	12.13	Back	0	0.857	0.335	1.040	0.891	0.348	0.557			11.8	
Body	UMTS 1900	RMC	1b	Q96KN	1:1	0.00	1907.60	9538	12.30	12.26	Back	0	0.946	0.365	1.009	0.955	0.368	0.597	A3		11.5	
Body	UMTS 1900	RMC	1b	Q96KN	1:1	-0.02	1907.60	9538	12.30	12.26	Back	0	0.943	0.364	1.009	0.950	0.367	0.594			11.5	
Body	UMTS 1900	RMC	1b	Q96KN	1:1	0.04	1907.60	9538	12.30	12.26	Top	0	0.004	0.002	1.009	0.004	0.002	0.003			35.2	
Body	UMTS 1900	RMC	1b	Q96KN	1:1	-0.06	1907.60	9538	12.30	12.26	Bottom	0	0.671	0.241	1.009	0.677	0.243	0.423			13.0	
Body	UMTS 1900	RMC	1b	Q96KN	1:1	0.01	1907.60	9538	12.30	12.26	Right	0	0.010	0.005	1.009	0.010	0.005	0.006			31.2	
Body	UMTS 1900	RMC	1b	Q96KN	1:1	0.06	1907.60	9538	12.30	12.26	Left	0	0.044	0.018	1.009	0.044	0.018	0.028			24.8	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT												Body										
Spatial Peak												1.6 W/kg (mW/g)										
Uncontrolled Exposure/General Population												averaged over 1 gram										
Note: Blue entry represents variability measurement																						

Table 10-8 Antenna 2

Exposure	Band / Mode	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #	Plimit [dBm]	Overall Plimit [dBm]
Body	UMTS 1900	RMC	2	M4TNW	1:1	0.05	1852.40	9262	15.60	15.18	Back	0	0.900	0.369	1.102	0.992	0.407	0.620			14.6
Body	UMTS 1900	RMC	2	M4TNW	1:1	0.03	1880.00	9400	15.60	15.10	Back	0	0.873	0.355	1.122	0.980	0.398	0.613			14.7
Body	UMTS 1900	RMC	2	M4TNW	1:1	0.01	1907.60	9538	15.60	15.12	Back	0	0.878	0.321	1.117	0.981	0.359	0.613			14.7
Body	UMTS 1900	RMC	2	M4TNW	1:1	0.08	1852.40	9262	15.60	15.18	Top	0	0.000	0.000	1.102	0.000	0.000	0.000			54.2
Body	UMTS 1900	RMC	2	M4TNW	1:1	0.01	1852.40	9262	15.60	15.18	Bottom	0	0.337	0.127	1.102	0.371	0.140	0.232			18.9
Body	UMTS 1900	RMC	2	M4TNW	1:1	0.04	1852.40	9262	15.60	15.18	Right	0	0.619	0.217	1.102	0.682	0.239	0.426			16.2
Body	UMTS 1900	RMC	2	M4TNW	1:1	0.01	1852.40	9262	15.60	15.18	Left	0	0.012	0.005	1.102	0.013	0.006	0.008			33.4
ANSI/IEEE C95.1 1992 - SAFETY LIMIT												Body									
Spatial Peak												1.6 W/kg (mW/g)									
Uncontrolled Exposure/General Population												averaged over 1 gram									

Table 10-9 Antenna 3b

Exposure	Band / Mode	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #	Plimit [dBm]	Overall Plimit [dBm]
Body	UMTS 1900	RMC	3b	RRXWW	1:1	-0.01	1852.40	9262	12.90	11.61	Back	0	0.459	0.190	1.346	0.618	0.256	0.386			14.0
Body	UMTS 1900	RMC	3b	RRXWW	1:1	-0.07	1852.40	9262	12.90	11.61	Top	0	0.679	0.251	1.346	0.914	0.338	0.571			12.3
Body	UMTS 1900	RMC	3b	RRXWW	1:1	-0.02	1880.00	9400	12.90	11.57	Top	0	0.718	0.264	1.358	0.975	0.359	0.609			12.0
Body	UMTS 1900	RMC	3b	RRXWW	1:1	-0.02	1907.60	9538	12.90	11.52	Top	0	0.720	0.265	1.374	0.989	0.364	0.618			11.9
Body	UMTS 1900	RMC	3b	RRXWW	1:1	0.06	1852.40	9262	12.90	11.61	Bottom	0	0.002	0.000	1.346	0.003	0.000	0.002			37.6
Body	UMTS 1900	RMC	3b	RRXWW	1:1	0.06	1852.40	9262	12.90	11.61	Right	0	0.025	0.012	1.346	0.034	0.016	0.021			26.6
Body	UMTS 1900	RMC	3b	RRXWW	1:1	0.01	1852.40	9262	12.90	11.61	Left	0	0.016	0.006	1.346	0.022	0.008	0.014			28.5
ANSI/IEEE C95.1 1992 - SAFETY LIMIT												Body									
Spatial Peak												1.6 W/kg (mW/g)									
Uncontrolled Exposure/General Population												averaged over 1 gram									

FCC ID: BCGA3269

SAR EVALUATION REPORT

Approved by:

Technical Manager

DUT Type:

Tablet Device

Page 207 of 255

REV 25.0

10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 10-10 Antenna 4

Exposure	Band / Mode	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #	Plimit [dBm]	Overall Plimit [dBm]
Body	UMTS 1900	RMC	4	Q96KN	1:1	0.01	1852.40	9262	14.40	13.32	Back	0	0.714	0.304	1.282	0.915	0.390	0.572		13.8	
Body	UMTS 1900	RMC	4	Q96KN	1:1	0.01	1880.00	9400	14.40	13.30	Back	0	0.691	0.291	1.288	0.890	0.375	0.556		13.9	
Body	UMTS 1900	RMC	4	Q96KN	1:1	0.02	1907.60	9538	14.40	13.21	Back	0	0.669	0.280	1.315	0.880	0.368	0.550		13.9	
Body	UMTS 1900	RMC	4	Q96KN	1:1	-0.02	1852.40	9262	14.40	13.32	Top	0	0.329	0.135	1.282	0.422	0.173	0.264		17.1	
Body	UMTS 1900	RMC	4	Q96KN	1:1	0.01	1852.40	9262	14.40	13.32	Bottom	0	0.002	0.001	1.282	0.003	0.001	0.002		39.3	
Body	UMTS 1900	RMC	4	Q96KN	1:1	0.01	1852.40	9262	14.40	13.32	Right	0	0.005	0.002	1.282	0.006	0.003	0.004		35.3	
Body	UMTS 1900	RMC	4	Q96KN	1:1	-0.11	1852.40	9262	14.40	13.32	Left	0	0.719	0.253	1.282	0.922	0.324	0.576		13.7	
Body	UMTS 1900	RMC	4	Q96KN	1:1	0.00	1880.00	9400	14.40	13.30	Left	0	0.741	0.259	1.288	0.954	0.334	0.596		13.6	
Body	UMTS 1900	RMC	4	Q96KN	1:1	0.11	1907.60	9538	14.40	13.21	Left	0	0.736	0.258	1.315	0.968	0.339	0.605		13.5	
ANSI/IEEE CS1.1 1992 - SAFETY LIMIT											Body 1.6 W/kg (mW/g) averaged over 1 gram										
Spatial Peak Uncontrolled Exposure/General Population																					

10.4 LTE Band 71 Standalone SAR

Table 10-11 Antenna 2

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #	PLimit [dBm]	Overall PLimit [dBm]
Body	LTE Band 71	20	QPSK	2	HMM56	1:1	-0.01	680.50	133297	0.0	21.30	20.73	1	99	Back	0	0.691	0.310	1.140	0.788	0.353	0.493		21.5	
Body	LTE Band 71	20	QPSK	2	HMM56	1:1	0.01	680.50	133297	0.0	21.30	20.81	50	25	Back	0	0.776	0.350	1.119	0.868	0.392	0.543		21.1	
Body	LTE Band 71	20	QPSK	2	HMM56	1:1	0.01	680.50	133297	0.0	21.30	20.70	100	0	Back	0	0.811	0.344	1.119	0.913	0.408	0.571		20.9	
Body	LTE Band 71	20	QPSK	2	HMM56	1:1	-0.18	680.50	133297	0.0	21.30	20.73	1	99	Top	0	0.018	0.007	1.140	0.021	0.008	0.013		37.4	
Body	LTE Band 71	20	QPSK	2	HMM56	1:1	-0.04	680.50	133297	0.0	21.30	20.81	50	25	Top	0	0.029	0.011	1.119	0.032	0.012	0.020		35.4	
Body	LTE Band 71	20	QPSK	2	HMM56	1:1	0.04	680.50	133297	0.0	21.30	20.73	1	99	Bottom	0	0.712	0.286	1.140	0.812	0.326	0.508		21.4	
Body	LTE Band 71	20	QPSK	2	HMM56	1:1	-0.02	680.50	133297	0.0	21.30	20.81	50	25	Bottom	0	0.774	0.306	1.119	0.866	0.342	0.541		21.1	
Body	LTE Band 71	20	QPSK	2	HMM56	1:1	-0.03	680.50	133297	0.0	21.30	20.70	100	0	Bottom	0	0.764	0.303	1.148	0.877	0.348	0.548		21.1	
Body	LTE Band 71	20	QPSK	2	HMM56	1:1	0.10	680.50	133297	0.0	21.30	20.73	1	99	Right	0	0.578	0.224	1.140	0.659	0.255	0.412		22.3	
Body	LTE Band 71	20	QPSK	2	HMM56	1:1	0.02	680.50	133297	0.0	21.30	20.81	50	25	Right	0	0.653	0.241	1.119	0.731	0.270	0.457		21.9	
Body	LTE Band 71	20	QPSK	2	HMM56	1:1	-0.17	680.50	133297	0.0	21.30	20.73	1	99	Left	0	0.049	0.020	1.140	0.056	0.023	0.035		33.0	
Body	LTE Band 71	20	QPSK	2	HMM56	1:1	-0.02	680.50	133297	0.0	21.30	20.81	50	25	Left	0	0.047	0.019	1.119	0.053	0.021	0.033		33.3	
ANSI/IEEE CS1.1 1992 - SAFETY LIMIT													Body 1.6 W/kg (mW/g) averaged over 1 gram												
Uncontrolled Exposure/General Population																									

Table 10-12 Antenna 4

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #	Limit [dBm]	Overall Limit [dBm]
Body	LTE Band 71	20	QPSK	4	LHWW	1:1	0.01	680.50	133297	0.0	21.00	20.89	1	50	Back	0	0.924	0.401	1.026	0.948	0.411	0.593		20.5	
Body	LTE Band 71	20	QPSK	4	LHWW	1:1	-0.03	680.50	133297	0.0	21.00	20.90	50	25	Back	0	0.948	0.412	1.023	0.970	0.421	0.606		20.4	
Body	LTE Band 71	20	QPSK	4	LHWW	1:1	-0.02	680.50	133297	0.0	21.00	20.86	100	0	Back	0	0.950	0.417	1.031	0.981	0.426	0.603		20.4	
Body	LTE Band 71	20	QPSK	4	LHWW	1:1	-0.02	680.50	133297	0.0	21.00	20.86	100	0	Back	0	0.961	0.415	1.033	0.993	0.429	0.621	A4	20.3	
Body	LTE Band 71	20	QPSK	4	LHWW	1:1	-0.04	680.50	133297	0.0	21.00	20.89	1	50	Top	0	0.898	0.347	1.026	0.925	0.358	0.578		20.6	
Body	LTE Band 71	20	QPSK	4	LHWW	1:1	-0.03	680.50	133297	0.0	21.00	20.90	50	25	Top	0	0.898	0.347	1.023	0.919	0.355	0.574		20.7	
Body	LTE Band 71	20	QPSK	4	LHWW	1:1	-0.04	680.50	133297	0.0	21.00	20.86	100	0	Top	0	0.881	0.342	1.033	0.910	0.353	0.569		20.7	20.3
Body	LTE Band 71	20	QPSK	4	LHWW	1:1	0.09	680.50	133297	0.0	21.00	20.89	1	50	Bottom	0	0.027	0.011	1.026	0.028	0.011	0.018		35.9	
Body	LTE Band 71	20	QPSK	4	LHWW	1:1	0.09	680.50	133297	0.0	21.00	20.90	50	25	Bottom	0	0.029	0.011	1.023	0.030	0.011	0.019		35.6	
Body	LTE Band 71	20	QPSK	4	LHWW	1:1	-0.12	680.50	133297	0.0	21.00	20.89	1	50	Right	0	0.048	0.020	1.026	0.049	0.021	0.031		33.4	
Body	LTE Band 71	20	QPSK	4	LHWW	1:1	-0.11	680.50	133297	0.0	21.00	20.90	50	25	Right	0	0.051	0.023	1.023	0.054	0.024	0.034		33.0	
Body	LTE Band 71	20	QPSK	4	LHWW	1:1	-0.09	680.50	133297	0.0	21.00	20.89	1	50	Left	0	0.629	0.235	1.026	0.645	0.241	0.403		22.2	
Body	LTE Band 71	20	QPSK	4	LHWW	1:1	-0.03	680.50	133297	0.0	21.00	20.90	50	25	Left	0	0.652	0.243	1.023	0.667	0.251	0.417		22.1	
ANSI/IEEE CS1.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population																	Body 1.6 W/kg (mW/g) averaged over 1 gram								

Note: Blue entry represents variability measurement

10.5 LTE Band 12 Standalone SAR

Table 10-13 Antenna 2

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #	PLimit [dBm]	Overall PLimit [dBm]
Body	LTE Band 12	10	QPSK	2	7NLUV	1:1	0.11	707.50	23095	0.0	19.90	19.21	1	49	Back	0	0.764	0.333	1.172	0.895	0.390	0.559		19.4	
Body	LTE Band 12	10	QPSK	2	7NLUV	1:1	0.01	707.50	23095	0.0	19.90	19.23	25	25	Back	0	0.767	0.336	1.167	0.895	0.392	0.559		19.4	
Body	LTE Band 12	10	QPSK	2	7NLUV	1:1	0.02	707.50	23095	0.0	19.90	19.19	50	0	Back	0	0.796	0.346	1.178	0.938	0.408	0.586		19.2	
Body	LTE Band 12	10	QPSK	2	7NLUV	1:1	0.06	707.50	23095	0.0	19.90	19.21	1	49	Top	0	0.018	0.007	1.172	0.021	0.008	0.013		35.6	
Body	LTE Band 12	10	QPSK	2	7NLUV	1:1	0.06	707.50	23095	0.0	19.90	19.23	25	25	Top	0	0.018	0.007	1.167	0.021	0.008	0.013		35.7	
Body	LTE Band 12	10	QPSK	2	7NLUV	1:1	-0.15	707.50	23095	0.0	19.90	19.21	1	49	Bottom	0	0.622	0.241	1.172	0.729	0.282	0.456		20.2	19.2
Body	LTE Band 12	10	QPSK	2	7NLUV	1:1	-0.02	707.50	23095	0.0	19.90	19.23	25	25	Bottom	0	0.626	0.243	1.167	0.731	0.284	0.457		20.3	
Body	LTE Band 12	10	QPSK	2	7NLUV	1:1	0.12	707.50	23095	0.0	19.90	19.21	1	49	Right	0	0.000	0.214	1.172	0.703	0.251	0.429		20.4	
Body	LTE Band 12	10	QPSK	2	7NLUV	1:1	-0.04	707.50	23095	0.0	19.90	19.23	25	25	Right	0	0.594	0.208	1.167	0.693	0.243	0.433		20.5	
Body	LTE Band 12	10	QPSK	2	7NLUV	1:1	-0.12	707.50	23095	0.0	19.90	19.21	1	49	Left	0	0.032	0.014	1.172	0.038	0.016	0.024		33.1	
Body	LTE Band 12	10	QPSK	2	7NLUV	1:1	-0.03	707.50	23095	0.0	19.90	19.23	25	25	Left	0	0.030	0.013	1.167	0.035	0.015	0.022		33.4	
ANSI/IEEE CS1.1 1992 - SAFETY LIMIT Spatial Peak																	Body 1.6 W/kg (mW/g) averaged over 1 gram								
Uncontrolled Exposure/General Population																									

FCC ID: BCGA3269

SAR EVALUATION REPORT

Approved by:

Technical Manager

DUT Type:

Tablet Device

Page 208 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional

Table 10-14 Antenna 4

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #	Limit [dBm]	Overall Limit [dBm]
Body	LTE Band 12	10	QPSK	4	7NLUV	1:1	-0.05	707.50	23095	0.0	19.50	19.49	1	0	Back	0	0.926	0.397	1.002	0.928	0.398	0.580	A5	19.1	19.1
Body	LTE Band 12	10	QPSK	4	7NLUV	1:1	0.00	707.50	23095	0.0	19.50	19.29	25	0	Back	0	0.897	0.385	1.050	0.942	0.404	0.589		19.1	
Body	LTE Band 12	10	QPSK	4	7NLUV	1:1	0.01	707.50	23095	0.0	19.50	19.28	50	0	Back	0	0.882	0.383	1.052	0.928	0.403	0.580		19.1	
Body	LTE Band 12	10	QPSK	4	7NLUV	1:1	0.02	707.50	23095	0.0	19.50	19.48	1	0	Top	0	0.607	0.236	1.002	0.608	0.236	0.380		21.0	
Body	LTE Band 12	10	QPSK	4	7NLUV	1:1	0.00	707.50	23095	0.0	19.50	19.29	25	0	Top	0	0.537	0.213	1.050	0.954	0.224	0.353		21.3	
Body	LTE Band 12	10	QPSK	4	7NLUV	1:1	0.13	707.50	23095	0.0	19.50	19.49	1	0	Bottom	0	0.613	0.205	1.002	0.613	0.205	0.008		37.6	
Body	LTE Band 12	10	QPSK	4	7NLUV	1:1	0.13	707.50	23095	0.0	19.50	19.29	25	0	Bottom	0	0.616	0.206	1.050	0.617	0.006	0.011		36.5	
Body	LTE Band 12	10	QPSK	4	7NLUV	1:1	0.00	707.50	23095	0.0	19.50	19.49	1	0	Right	0	0.031	0.014	1.002	0.031	0.014	0.019		33.9	
Body	LTE Band 12	10	QPSK	4	7NLUV	1:1	0.07	707.50	23095	0.0	19.50	19.29	25	0	Right	0	0.028	0.012	1.050	0.029	0.013	0.018		34.1	
Body	LTE Band 12	10	QPSK	4	7NLUV	1:1	-0.03	707.50	23095	0.0	19.50	19.49	1	0	Left	0	0.453	0.167	1.002	0.454	0.167	0.284		22.2	
Body	LTE Band 12	10	QPSK	4	7NLUV	1:1	-0.02	707.50	23095	0.0	19.50	19.29	25	0	Left	0	0.460	0.170	1.050	0.461	0.179	0.302		22.0	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT																Body Spatial Peak Uncontrolled Exposure/General Population								1.6 W/kg (mW/g) averaged over 1 gram	

10.6 LTE Band 13 Standalone SAR

Table 10-15 Antenna 2

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #	Limit [dBm]	Overall Limit [dBm]	
Body	LTE Band 13	10	QPSK	2	7NLUV	1:1	-0.07	782.00	23230	0.0	20.40	19.17	1	25	Back	0	0.747	0.338	1.327	0.991	0.449	0.619		19.4		
Body	LTE Band 13	10	QPSK	2	7NLUV	1:1	0.02	782.00	23230	0.0	20.40	19.15	25	12	Back	0	0.740	0.333	1.321	0.978	0.440	0.611		19.5		
Body	LTE Band 13	10	QPSK	2	7NLUV	1:1	-0.01	782.00	23230	0.0	20.40	19.16	50	0	Back	0	0.731	0.330	1.330	0.972	0.439	0.608		19.5		
Body	LTE Band 13	10	QPSK	2	7NLUV	1:1	0.21	782.00	23230	0.0	20.40	19.17	1	25	Top	0	0.018	0.007	1.327	0.024	0.009	0.015		35.6		
Body	LTE Band 13	10	QPSK	2	7NLUV	1:1	0.11	782.00	23230	0.0	20.40	19.19	25	12	Top	0	0.016	0.007	1.321	0.021	0.009	0.013		36.1		
Body	LTE Band 13	10	QPSK	2	7NLUV	1:1	-0.02	782.00	23230	0.0	20.40	19.17	1	25	Bottom	0	0.659	0.259	1.327	0.874	0.344	0.546		20.0		
Body	LTE Band 13	10	QPSK	2	7NLUV	1:1	0.00	782.00	23230	0.0	20.40	19.19	25	12	Bottom	0	0.647	0.254	1.321	0.855	0.336	0.534		20.1	19.4	
Body	LTE Band 13	10	QPSK	2	7NLUV	1:1	-0.01	782.00	23230	0.0	20.40	19.16	50	0	Bottom	0	0.633	0.251	1.330	0.842	0.334	0.526		20.1		
Body	LTE Band 13	10	QPSK	2	7NLUV	1:1	-0.04	782.00	23230	0.0	20.40	19.17	1	25	Right	0	0.686	0.253	1.327	0.910	0.336	0.569		19.8		
Body	LTE Band 13	10	QPSK	2	7NLUV	1:1	0.03	782.00	23230	0.0	20.40	19.19	25	12	Right	0	0.682	0.251	1.321	0.901	0.332	0.563		19.8		
Body	LTE Band 13	10	QPSK	2	7NLUV	1:1	-0.05	782.00	23230	0.0	20.40	19.16	50	0	Right	0	0.616	0.227	1.330	0.819	0.302	0.512		20.2		
Body	LTE Band 13	10	QPSK	2	7NLUV	1:1	0.13	782.00	23230	0.0	20.40	19.17	1	25	Left	0	0.630	0.015	1.327	0.040	0.020	0.025		33.4		
Body	LTE Band 13	10	QPSK	2	7NLUV	1:1	0.04	782.00	23230	0.0	20.40	19.19	25	12	Left	0	0.629	0.014	1.321	0.038	0.018	0.024		33.5		
ANSI/IEEE C95.1 1992 - SAFETY LIMIT																Body Spatial Peak Uncontrolled Exposure/General Population										1.6 W/kg (mW/g) averaged over 1 gram

Table 10-16 Antenna 4

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (SAR)	Plot #	Limit [dBm]	Overall Limit [dBm]	
Body	LTE Band 13	10	QPSK	4	7NLUV	1:1	-0.03	782.00	23230	0.0	21.30	21.11	1	25	Back	0	0.951	0.413	1.045	0.994	0.432	0.621	A6	20.6		
Body	LTE Band 13	10	QPSK	4	7NLUV	1:1	0.00	782.00	23230	0.0	21.30	21.09	25	25	Back	0	0.929	0.406	1.050	0.975	0.426	0.609		20.7		
Body	LTE Band 13	10	QPSK	4	7NLUV	1:1	0.00	782.00	23230	0.0	21.30	21.04	50	0	Back	0	0.868	0.384	1.062	0.943	0.418	0.589		20.9		
Body	LTE Band 13	10	QPSK	4	7NLUV	1:1	0.01	782.00	23230	0.0	21.30	21.11	1	25	Top	0	0.703	0.277	1.045	0.735	0.289	0.459		21.9		
Body	LTE Band 13	10	QPSK	4	7NLUV	1:1	0.00	782.00	23230	0.0	21.30	21.09	25	25	Top	0	0.697	0.273	1.050	0.732	0.287	0.458		22.0		
Body	LTE Band 13	10	QPSK	4	7NLUV	1:1	0.06	782.00	23230	0.0	21.30	21.11	1	25	Bottom	0	0.680	0.014	1.045	0.031	0.015	0.019		35.6		
Body	LTE Band 13	10	QPSK	4	7NLUV	1:1	-0.01	782.00	23230	0.0	21.30	21.09	25	25	Bottom	0	0.627	0.013	1.050	0.028	0.014	0.018		36.1		
Body	LTE Band 13	10	QPSK	4	7NLUV	1:1	0.04	782.00	23230	0.0	21.30	21.11	1	25	Right	0	0.055	0.026	1.045	0.057	0.027	0.036		33.0		
Body	LTE Band 13	10	QPSK	4	7NLUV	1:1	0.01	782.00	23230	0.0	21.30	21.09	25	25	Right	0	0.057	0.026	1.050	0.060	0.027	0.038		32.8		
Body	LTE Band 13	10	QPSK	4	7NLUV	1:1	-0.03	782.00	23230	0.0	21.30	21.11	1	25	Left	0	0.763	0.311	1.045	0.797	0.325	0.498		21.6		
Body	LTE Band 13	10	QPSK	4	7NLUV	1:1	0.00	782.00	23230	0.0	21.30	21.09	25	25	Left	0	0.736	0.302	1.050	0.773	0.317	0.483		21.7		
Body	LTE Band 13	10	QPSK	4	7NLUV	1:1	0.01	782.00	23230	0.0	21.30	21.04	50	0	Left	0	0.705	0.311	1.062	0.812	0.330	0.508		21.5		
ANSI/IEEE C95.1 1992 - SAFETY LIMIT																Body Spatial Peak Uncontrolled Exposure/General Population										1.6 W/kg (mW/g) averaged over 1 gram

10.7 LTE Band 14 Standalone SAR

Table 10-17 Antenna 2

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #	Limit [dBm]	Overall Limit [dBm]
Body	LTE Band 14	10	QPSK	2	HMM56	1:1	0.03	793.00	23330	0.0	20.40	19.45	1	25	Back	0	0.693	0.305	1.245	0.863	0.380	0.539		20.0	
Body	LTE Band 14	10	QPSK	2	HMM56	1:1	0.01	793.00	23330	0.0	20.40	19.54	25	12	Back	0	0.697	0.303	1.219	0.850	0.369	0.531		20.1	
Body	LTE Band 14	10	QPSK	2	HMM56	1:1	0.00	793.00	23330	0.0	20.40	19.42	50	0	Back	0	0.746	0.329	1.253	0.935	0.412	0.584		19.7	
Body	LTE Band 14	10	QPSK	2	HMM56	1:1	0.08	793.00	23330	0.0	20.40	19.45	1	25	Top	0	0.026	0.011	1.245	0.032	0.014	0.020		34.3	
Body	LTE Band 14	10	QPSK	2	HMM56	1:1	-0.02	793.00	23330	0.0	20.40	19.54	25	12	Top	0	0.025	0.011	1.219	0.030	0.013	0.019		34.5	
Body	LTE Band 14	10	QPSK	2	HMM56	1:1	-0.07	793.00	23330	0.0	20.40	19.45	1	25	Bottom	0	0.685	0.266	1.245	0.813	0.331	0.523		20.1	
Body	LTE Band 14	10	QPSK	2	HMM56	1:1	0.00	793.00	23330	0.0	20.40	19.54	25	12	Bottom	0	0.685	0.266	1.219	0.835	0.334	0.522		20.2	
Body	LTE Band 14	10	QPSK	2	HMM56	1:1	-0.04	793.00	23330	0.0	20.40	19.42	50	0	Bottom	0	0.715	0.277	1.253	0.896	0.347	0.560		19.9	
Body	LTE Band 14	10	QPSK	2	HMM56	1:1	0.13	793.00	23330	0.0	20.40	19.45	1	25	Right	0	0.672	0.254	1.245	0.837	0.316	0.523		20.2	
Body	LTE Band 14	10	QPSK	2	HMM56	1:1	0.01	793.00	23330	0.0	20.40	19.54	25	12	Right	0	0.685	0.265	1.219	0.835	0.331	0.522		20.2	
Body	LTE Band 14	10	QPSK	2	HMM56	1:1	-0.02	793.00	23330	0.0	20.40	19.42	50	0	Right	0	0.667	0.251	1.253	0.836	0.315	0.523		20.2	
Body	LTE Band 14	10	QPSK	2	HMM56	1:1	0.04	793.00	23330	0.0	20.40	19.45	1	25	Left	0	0.040	0.018	1.245	0.050	0.022	0.031		32.4	
Body	LTE Band 14	10	QPSK	2	HMM56	1:1	-0.03	793.00	23330	0.0	20.40	19.54	25	12	Left	0	0.040	0.018	1.219	0.049	0.022	0.031		32.5	
ANSI/IEEE C63.1 1992 - SAFETY LIMIT																	Body								
Spatial Peak																	1.6 W/kg (mW/g)								
Uncontrolled Exposure/General Population																	averaged over 1 gram								

Table 10-18 Antenna 4

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #	Limit [dBm]	Overall Limit [dBm]
Body	LTE Band 14	10	QPSK	4	LHWW	1:1	0.01	793.00	23330	0.0	21.80	20.75	1	25	Back	0	0.750	0.341	1.274	0.956	0.434	0.598		21.3	
Body	LTE Band 14	10	QPSK	4	LHWW	1:1	-0.01	793.00	23330	0.0	21.80	20.87	25	12	Back	0	0.765	0.348	1.239	0.948	0.431	0.593	A7	21.3	
Body	LTE Band 14	10	QPSK	4	LHWW	1:1	0.01	793.00	23330	0.0	21.80	20.73	50	0	Back	0	0.763	0.346	1.279	0.976	0.443	0.610		21.2	
Body	LTE Band 14	10	QPSK	4	LHWW	1:1	-0.05	793.00	23330	0.0	21.80	20.75	1	25	Top	0	0.722	0.290	1.274	0.920	0.369	0.575		21.5	
Body	LTE Band 14	10	QPSK	4	LHWW	1:1	-0.07	793.00	23330	0.0	21.80	20.87	25	12	Top	0	0.728	0.291	1.239	0.902	0.361	0.564		21.5	
Body	LTE Band 14	10	QPSK	4	LHWW	1:1	0.02	793.00	23330	0.0	21.80	20.73	50	0	Top	0	0.717	0.286	1.279	0.917	0.366	0.573		21.5	
Body	LTE Band 14	10	QPSK	4	LHWW	1:1	-0.08	793.00	23330	0.0	21.80	20.75	1	25	Bottom	0	0.606	0.011	1.274	0.033	0.014	0.021		35.9	
Body	LTE Band 14	10	QPSK	4	LHWW	1:1	-0.04	793.00	23330	0.0	21.80	20.87	25	12	Bottom	0	0.608	0.012	1.239	0.035	0.015	0.022		35.7	
Body	LTE Band 14	10	QPSK	4	LHWW	1:1	0.02	793.00	23330	0.0	21.80	20.75	1	25	Right	0	0.650	0.023	1.274	0.064	0.029	0.040		33.1	
Body	LTE Band 14	10	QPSK	4	LHWW	1:1	-0.01	793.00	23330	0.0	21.80	20.87	25	12	Right	0	0.648	0.022	1.239	0.059	0.027	0.037		33.4	
Body	LTE Band 14	10	QPSK	4	LHWW	1:1	-0.11	793.00	23330	0.0	21.80	20.75	1	25	Left	0	0.677	0.281	1.274	0.862	0.358	0.539		21.7	
Body	LTE Band 14	10	QPSK	4	LHWW	1:1	0.02	793.00	23330	0.0	21.80	20.87	25	12	Left	0	0.655	0.268	1.239	0.812	0.332	0.508		22.0	
Body	LTE Band 14	10	QPSK	4	LHWW	1:1	-0.03	793.00	23330	0.0	21.80	20.73	50	0	Left	0	0.618	0.263	1.279	0.790	0.336	0.494		22.1	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT																	Body								
Spatial Peak																	1.6 W/kg (mW/g)								
Uncontrolled Exposure/General Population																	averaged over 1 gram								

10.8 LTE Band 26 (Cell) Standalone SAR

Table 10-19 Antenna 2

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #	Limit [dBm]	Overall Limit [dBm]
Body	LTE Band 26	10	QPSK	2	LHWW	1:1	0.16	819.00	26740	0.0	19.70	19.55	1	0	Back	0	0.913	0.435	1.035	0.945	0.450	0.591	A8	19.0	
Body	LTE Band 26	10	QPSK	2	LHWW	1:1	-0.02	819.00	26740	0.0	19.70	19.55	1	0	Back	0	0.895	0.431	1.035	0.926	0.446	0.579		19.1	
Body	LTE Band 26	10	QPSK	2	LHWW	1:1	-0.04	831.50	26805	0.0	19.70	19.31	1	49	Back	0	0.755	0.357	1.094	0.826	0.391	0.516		19.6	
Body	LTE Band 26	10	QPSK	2	LHWW	1:1	0.13	844.00	26990	0.0	19.70	19.32	1	0	Back	0	0.757	0.355	1.091	0.826	0.387	0.516		19.6	
Body	LTE Band 26	10	QPSK	2	LHWW	1:1	0.00	819.00	26740	0.0	19.70	19.48	25	12	Back	0	0.897	0.429	1.052	0.944	0.451	0.590		19.0	
Body	LTE Band 26	10	QPSK	2	LHWW	1:1	0.02	831.50	26805	0.0	19.70	19.37	25	12	Back	0	0.787	0.372	1.079	0.849	0.401	0.531		19.5	
Body	LTE Band 26	10	QPSK	2	LHWW	1:1	0.01	844.00	26990	0.0	19.70	19.28	25	25	Back	0	0.708	0.327	1.102	0.780	0.360	0.488		19.9	
Body	LTE Band 26	10	QPSK	2	LHWW	1:1	0.02	819.00	26740	0.0	19.70	19.37	50	0	Back	0	0.870	0.412	1.079	0.939	0.445	0.587		19.1	
Body	LTE Band 26	10	QPSK	2	LHWW	1:1	0.07	819.00	26740	0.0	19.70	19.55	1	0	Top	0	0.609	0.012	1.055	0.020	0.012	0.019		34.0	
Body	LTE Band 26	10	QPSK	2	LHWW	1:1	0.09	819.00	26740	0.0	19.70	19.48	25	12	Top	0	0.606	0.011	1.052	0.027	0.012	0.017		34.4	
Body	LTE Band 26	10	QPSK	2	LHWW	1:1	-0.10	819.00	26740	0.0	19.70	19.55	1	0	Bottom	0	0.742	0.301	1.035	0.768	0.312	0.480		19.9	
Body	LTE Band 26	10	QPSK	2	LHWW	1:1	-0.08	831.50	26805	0.0	19.70	19.31	1	49	Bottom	0	0.742	0.298	1.094	0.812	0.326	0.508		19.7	
Body	LTE Band 26	10	QPSK	2	LHWW	1:1	-0.01	844.00	26990	0.0	19.70	19.32	1	0	Bottom	0	0.718	0.315	1.091	0.849	0.344	0.521		19.5	
Body	LTE Band 26	10	QPSK	2	LHWW	1:1	0.01	819.00	26740	0.0	19.70	19.48	25	12	Bottom	0	0.747	0.303	1.052	0.786	0.319	0.491		19.8	
Body	LTE Band 26	10	QPSK	2	LHWW	1:1	0.03	831.50	26805	0.0	19.70	19.37	25	12	Bottom	0	0.761	0.307	1.079	0.821	0.331	0.513		19.6	
Body	LTE Band 26	10	QPSK	2	LHWW	1:1	0.04	844.00	26990	0.0	19.70	19.28	25	25	Bottom	0	0.790	0.315	1.102	0.871	0.347	0.544		19.4	
Body	LTE Band 26	10	QPSK	2	LHWW	1:1	0.00	819.00	26740	0.0	19.70	19.37	50	0	Bottom	0	0.746	0.299	1.079	0.805	0.323	0.503		19.7	
Body	LTE Band 26	10	QPSK	2	LHWW	1:1	0.12	819.00	26740	0.0	19.70	19.55	1	0	Right	0	0.750	0.299	1.035	0.776	0.299	0.485		19.9	
Body	LTE Band 26	10	QPSK	2	LHWW	1:1	-0.02	831.50	26805	0.0	19.70	19.31	1	49	Right	0	0.867	0.331	1.094	0.948	0.362	0.593		19.0	
Body	LTE Band 26	10	QPSK	2	LHWW	1:1	-0.11	844.00	26990	0.0	19.70	19.32	1	0	Right	0	0.869	0.341	1.091	0.948	0.372	0.593		19.0	
Body	LTE Band 26	10	QPSK	2	LHWW	1:1	0.01	819.00	26740	0.0	19.70	19.48	25	12	Right	0	0.799	0.307	1.052	0.815	0.323	0.526		19.5	
Body	LTE Band 26	10	QPSK	2	LHWW	1:1	0.02	831.50	26805	0.0	19.70	19.37	25	12	Right	0	0.878	0.336	1.079	0.947	0.363	0.592		19.0	
Body	LTE Band 26	10	QPSK	2	LHWW	1:1	0.04	844.00	26990	0.0	19.70	19.28	25	25	Right	0	0.858	0.337	1.102	0.946	0.371	0.591		19.0	
Body	LTE Band 26	10	QPSK	2	LHWW	1:1	-0.03	819.00	26740	0.0	19.70	19.37	50	0	Right	0	0.814	0.307	1.079	0.878	0.331	0.549		19.4	
Body	LTE Band 26	10	QPSK	2	LHWW	1:1	0.05	819.00	26740	0.0	19.70	19.55	1	0	Left	0	0.628	0.026	1.085	0.026	0.016	0.023		34.0	
Body	LTE Band 26	10	QPSK	2	LHWW	1:1	0.01	819.00	26740	0.0	19.70	19.48	25	12	Left	0	0.630	0.015	1.052	0.032	0.016	0.020		33.8	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT																Body									
Spatial Peak																1.6 W/kg (mW/g)									
Uncontrolled Exposure/General Population																averaged over 1 gram									

Note: Blue entry represents variability measurement

Table 10-20 Antenna 4

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #	Limit [dBm]	Overall Limit [dBm]
Body	LTE Band 26	10	QPSK	4	DKCF7	1:1	0.00	819.00	26740	0.0	20.00	19.40	1	0	Back	0	0.865	0.418	1.148	0.993	0.480	0.621		19.1	19.1
Body	LTE Band 26	10	QPSK	4	DKCF7	1:1	0.07	831.50	26805	0.0	20.00	19.41	1	49	Back	0	0.725	0.350	1.146	0.831	0.401	0.519		19.9	
Body	LTE Band 26	10	QPSK	4	DKCF7	1:1	0.01	844.00	26990	0.0	20.00	19.27	1	49	Back	0	0.816	0.383	1.183	0.729	0.335	0.456		20.5	
Body	LTE Band 26	10	QPSK	4	DKCF7	1:1	-0.02	819.00	26740	0.0	20.00	19.38	25	12	Back	0	0.789	0.364	1.153	0.910	0.420	0.569		19.5	
Body	LTE Band 26	10	QPSK	4	DKCF7	1:1	0.00	831.50	26805	0.0	20.00	19.39	25	12	Back	0	0.755	0.366	1.151	0.869	0.421	0.543		19.7	
Body	LTE Band 26	10	QPSK	4	DKCF7	1:1	0.01	844.00	26990	0.0	20.00	19.24	25	12	Back	0	0.826	0.288	1.191	0.746	0.343	0.466		20.4	
Body	LTE Band 26	10	QPSK	4	DKCF7	1:1	-0.01	819.00	26740	0.0	20.00	19.32	50	0	Back	0	0.814	0.404	1.169	0.975	0.472	0.609		19.2	
Body	LTE Band 26	10	QPSK	4	DKCF7	1:1	-0.06	819.00	26740	0.0	20.00	19.31	1	0	Top	0	0.731	0.289	1.401	0.849	0.342	0.501		20.0	
Body	LTE Band 26	10	QPSK	4	DKCF7	1:1	0.06	831.50	26805	0.0	20.00	19.41	1	49	Top	0	0.752	0.295	1.146	0.862	0.338	0.539		19.7	
Body	LTE Band 26	10	QPSK	4	DKCF7	1:1	-0.03	844.00	26990	0.0	20.00	19.27	1	49	Top	0	0.740	0.292	1.183	0.875	0.345	0.547		19.7	
Body	LTE Band 26	10	QPSK	4	DKCF7	1:1	-0.01	819.00	26740	0.0	20.00	19.38	25	12	Top	0	0.749	0.297	1.153	0.853	0.342	0.533		19.8	
Body	LTE Band 26	10	QPSK	4	DKCF7	1:1	-0.04	831.50	26805	0.0	20.00	19.36	25	12	Top	0	0.744	0.298	1.145	0.861	0.342	0.533		19.8	
Body	LTE Band 26	10	QPSK	4	DKCF7	1:1	-0.02	844.00	26990	0.0	20.00	19.24	25	12	Top	0	0.726	0.287	1.191	0.865	0.342	0.541		19.1	
Body	LTE Band 26	10	QPSK	4	DKCF7	1:1	-0.01	819.00	26740	0.0	20.00	19.32	50	0	Top	0	0.699	0.281	1.169	0.817	0.328	0.511		20.7	
Body	LTE Band 26	10	QPSK	4	DKCF7	1:1	0.00	831.50	26805	0.0	20.00	19.41	1	49	Bottom	0	0.806	0.016	1.146	0.040	0.018	0.026		33.9	
Body	LTE Band 26	10	QPSK	4	DKCF7	1:1	0.02	831.50	26805	0.0	20.00	19.39	25	12	Bottom	0	0.802	0.015	1.146	0.039	0.017	0.021		33.1	
Body	LTE Band 26	10	QPSK	4	DKCF7	1:1	0.05	831.50	26805	0.0	20.00	19.41	1	49	Right	0	0.830	0.014	1.146	0.034	0.016	0.021		33.7	
Body	LTE Band 26	10	QPSK	4	DKCF7	1:1	-0.09	831.50	26805	0.0	20.00	19.39	25	12	Right	0	0.835	0.017	1.151	0.040	0.020	0.025		33.0	
Body	LTE Band 26	10	QPSK	4	DKCF7	1:1	0.02	819.00	26740	0.0	20.00	19.40	1	0	Left	0	0.762	0.293	1.148	0.875	0.336	0.547		19.7	
Body	LTE Band 26	10	QPSK	4	DKCF7	1:1	0.00	831.50	26805	0.0	20.00	19.41	1	49	Left	0	0.775	0.301	1.146	0.889	0.347	0.556		19.6	
Body	LTE Band 26	10	QPSK	4	DKCF7	1:1	0.01	844.00	26990	0.0	20.00	19.27	1	49	Left	0	0.675	0.278	1.183	0.799	0.329	0.499		20.1	
Body	LTE Band 26	10	QPSK	4	DKCF7	1:1	0.03	819.00	26740	0.0	20.00	19.38	25	12	Left	0	0.776	0.302	1.153	0.895	0.348	0.559		19.6	
Body	LTE Band 26	10	QPSK	4	DKCF7	1:1	-0.01	831.50	26805	0.0	20.00	19.39	25	12	Left	0	0.769	0.298	1.151	0.885	0.343	0.553		19.6	
Body	LTE Band 26	10	QPSK	4	DKCF7	1:1	0.01	844.00	26990	0.0	20.00	19.28	25	12	Left	0	0.708	0.289	1.151	0.863	0.344	0.521		19.8	
Body	LTE Band 26	10	QPSK	4	DKCF7	1:1	0.01	819.00	26740	0.0	20.00	19.32	50	0	Left	0	0.754	0.293	1.169	0.881	0.343	0.551		19.6	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT																									
Spatial Peak																	Body								
Uncontrolled Exposure (General Population)																	1.6 W/kg (avg/1g)								

Table 10-40 Antenna 2

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Add'l Info	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #	PLimit [dBm]	Overall PLimit [dBm]
Body	LTE Band 41	20	QPSK	2	27W79	1:1.58	0.03	2506.00	39750	0.0	15.10	14.41	1	50	Back	0	N/A	0.807	0.299	1.172	0.969	0.350	0.606		12.2	
Body	LTE Band 41	20	QPSK	2	27W79	1:1.58	0.02	2506.00	39750	0.0	15.10	14.39	1	99	Back	0	N/A	0.807	0.291	1.178	0.951	0.343	0.594		12.3	
Body	LTE Band 41	20	QPSK	2	27W79	1:2.31	0.05	2506.00	39750	0.0	16.70	15.93	1	50	Back	0	N/A	0.792	0.288	1.194	0.946	0.344	0.591		12.3	
Body	LTE Band 41	20	QPSK	2	27W79	1:2.31	0.04	2506.00	39750	0.0	16.70	15.91	1	99	Back	0	N/A	0.779	0.284	1.199	0.934	0.341	0.584		12.3	
Body	LTE Band 41	20	QPSK	2	27W79	1:1.58	0.08	2549.50	40185	0.0	15.10	14.51	1	50	Back	0	N/A	0.749	0.272	1.146	0.858	0.312	0.536		12.8	
Body	LTE Band 41	20	QPSK	2	27W79	1:1.58	0.02	2593.00	40620	0.0	15.10	14.39	1	99	Back	0	N/A	0.693	0.252	1.178	0.816	0.297	0.510		13.0	
Body	LTE Band 41	20	QPSK	2	27W79	1:1.58	0.07	2636.50	41055	0.0	15.10	14.37	1	99	Back	0	N/A	0.643	0.231	1.183	0.748	0.273	0.468		13.4	
Body	LTE Band 41	20	QPSK	2	27W79	1:1.58	0.07	2680.00	41490	0.0	15.10	14.26	1	99	Back	0	N/A	0.617	0.228	1.213	0.773	0.277	0.483		13.2	
Body	LTE Band 41	20	QPSK	2	27W79	1:1.58	0.11	2506.00	39750	0.0	15.10	14.46	50	25	Back	0	N/A	0.811	0.294	1.159	0.940	0.341	0.588		12.4	
Body	LTE Band 41	20	QPSK	2	27W79	1:1.58	0.07	2549.50	40185	0.0	15.10	14.59	50	25	Back	0	N/A	0.769	0.279	1.125	0.805	0.314	0.541		12.7	
Body	LTE Band 41	20	QPSK	2	27W79	1:1.58	0.03	2593.00	40620	0.0	15.10	14.42	50	25	Back	0	N/A	0.709	0.258	1.169	0.829	0.302	0.518		12.9	
Body	LTE Band 41	20	QPSK	2	27W79	1:1.58	0.05	2636.50	41055	0.0	15.10	14.40	50	25	Back	0	N/A	0.659	0.240	1.175	0.774	0.282	0.484		13.2	
Body	LTE Band 41	20	QPSK	2	27W79	1:1.58	0.05	2680.00	41490	0.0	15.10	14.31	50	25	Back	0	N/A	0.629	0.228	1.199	0.754	0.273	0.471		13.1	
Body	LTE Band 41	20	QPSK	2	27W79	1:1.58	-0.03	2549.50	40185	0.0	15.10	14.47	100	0	Back	0	N/A	0.752	0.274	1.156	0.869	0.317	0.543		12.7	
Body	LTE Band 41	20	QPSK	2	27W79	1:1.58	0.06	2549.50	40185	0.0	15.10	14.51	1	50	Top	0	N/A	0.605	0.005	1.146	0.006	0.006	0.004		34.5	
Body	LTE Band 41	20	QPSK	2	27W79	1:1.58	0.07	2549.50	40185	0.0	15.10	14.59	50	25	Top	0	N/A	0.613	0.013	1.125	0.015	0.015	0.009		30.4	
Body	LTE Band 41	20	QPSK	2	27W79	1:1.58	-0.01	2549.50	40185	0.0	15.10	14.51	1	50	Bottom	0	N/A	0.526	0.036	1.146	0.374	0.121	0.234		16.4	
Body	LTE Band 41	20	QPSK	2	27W79	1:1.58	-0.04	2549.50	40185	0.0	15.10	14.59	50	25	Bottom	0	N/A	0.529	0.107	1.125	0.370	0.120	0.231		16.4	12.2
Body	LTE Band 41	20	QPSK	2	27W79	1:1.58	0.03	2506.00	39750	0.0	15.10	14.41	1	50	Right	0	N/A	0.587	0.194	1.172	0.688	0.227	0.430		13.7	
Body	LTE Band 41	20	QPSK	2	27W79	1:1.58	0.00	2549.50	40185	0.0	15.10	14.51	1	50	Right	0	N/A	0.586	0.194	1.146	0.682	0.232	0.437		13.8	
Body	LTE Band 41	20	QPSK	2	27W79	1:1.58	-0.07	2593.00	40620	0.0	15.10	14.39	1	99	Right	0	N/A	0.603	0.194	1.178	0.710	0.229	0.444		13.6	
Body	LTE Band 41	20	QPSK	2	27W79	1:1.58	0.01	2636.50	41055	0.0	15.10	14.37	1	99	Right	0	N/A	0.618	0.196	1.183	0.731	0.232	0.457		13.5	
Body	LTE Band 41	20	QPSK	2	27W79	1:1.58	-0.02	2680.00	41490	0.0	15.10	14.26	1	99	Right	0	N/A	0.672	0.210	1.213	0.815	0.255	0.509		13.0	
Body	LTE Band 41	20	QPSK	2	27W79	1:1.58	0.02	2506.00	39750	0.0	15.10	14.46	50	25	Right	0	N/A	0.601	0.196	1.159	0.687	0.227	0.429		13.7	
Body	LTE Band 41	20	QPSK	2	27W79	1:1.58	-0.01	2549.50	40185	0.0	15.10	14.59	50	25	Right	0	N/A	0.601	0.195	1.125	0.676	0.229	0.423		13.8	
Body	LTE Band 41	20	QPSK	2	27W79	1:1.58	0.04	2593.00	40620	0.0	15.10	14.42	50	25	Right	0	N/A	0.609	0.196	1.169	0.712	0.229	0.445		13.6	
Body	LTE Band 41	20	QPSK	2	27W79	1:1.58	0.04	2636.50	41055	0.0	15.10	14.40	50	25	Right	0	N/A	0.617	0.200	1.175	0.717	0.227	0.461		13.4	
Body	LTE Band 41	20	QPSK	2	27W79	1:1.58	-0.04	2680.00	41490	0.0	15.10	14.31	50	25	Right	0	N/A	0.665	0.209	1.199	0.791	0.249	0.498		13.1	
Body	LTE Band 41	20	QPSK	2	27W79	1:1.58	0.00	2549.50	40185	0.0	15.10	14.47	100	0	Right	0	N/A	0.599	0.195	1.156	0.692	0.225	0.433		13.7	
Body	LTE Band 41	20	QPSK	2	27W79	1:1.58	0.09	2549.50	40185	0.0	15.10	14.51	1	50	Left	0	N/A	0.611	0.008	1.146	0.013	0.009	0.008		31.1	
Body	LTE Band 41	20	QPSK	2	27W79	1:1.58	0.04	2549.50	40185	0.0	15.10	14.59	50	25	Left	0	N/A	0.611	0.008	1.125	0.002	0.009	0.008		31.2	
Body	LTE Band 41	20	QPSK	2	27W79	1:1.58	0.02	2506.00	39750	0.0	15.10	14.66	1	99	Back	0	ULCA 41C	0.875	0.319	1.107	0.969	0.353	0.606	A14	12.2	
Body	LTE Band 41	20	QPSK	2	27W79	1:2.31	0.04	2506.00	39750	0.0	16.70	16.07	1	99	Back	0	ULCA 41C	0.840	0.306	1.156	0.971	0.354	0.607		12.2	
ANSI/IEEE C63.1 1992 - SAFETY LIMIT																		Body								
Spatial Peak																		1.6 W/kg (mW/g)								
Uncontrolled Exposure/General Population																		averaged over 1 gram								

Note: Green entry represents HPUE measurement

Table 10-41 Antenna 3b

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Add'l Info	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #	PLimit [dBm]	Overall PLimit [dBm]
Body	LTE Band 41	20	QPSK	3b	XTVPF	1:1.58	0.02	2549.50	40185	0.0	14.90	14.13	1	50	Back	0	N/A	0.432	0.157	1.194	0.516	0.187	0.323		14.8	
Body	LTE Band 41	20	QPSK	3b	XTVPF	1:1.58	0.03	2549.50	40185	0.0	14.90	14.16	50	25	Back	0	N/A	0.432	0.157	1.186	0.512	0.186	0.320		14.8	
Body	LTE Band 41	20	QPSK	3b	XTVPF	1:1.58	0.02	2506.00	39750	0.0	14.90	14.06	1	50	Top	0	N/A	0.790	0.262	1.213	0.958	0.318	0.599		12.1	
Body	LTE Band 41	20	QPSK	3b	XTVPF	1:1.58	-0.03	2549.50	40185	0.0	14.90	14.13	1	50	Top	0	N/A	0.716	0.236	1.194	0.855	0.282	0.534		12.6	
Body	LTE Band 41	20	QPSK	3b	XTVPF	1:1.58	0.07	2593.00	40620	0.0	14.90	14.08	1	50	Top	0	N/A	0.721	0.232	1.208	0.871	0.289	0.544		12.5	
Body	LTE Band 41	20	QPSK	3b	XTVPF	1:1.58	0.00	2636.50	41055	0.0	14.90	13.94	1	99	Top	0	N/A	0.685	0.218	1.247	0.854	0.272	0.534		12.6	
Body	LTE Band 41	20	QPSK	3b	XTVPF	1:1.58	0.03	2680.00	41490	0.0	14.90	14.07	1	50	Top	0	N/A	0.671	0.211	1.211	0.813	0.256	0.508		12.8	
Body	LTE Band 41	20	QPSK	3b	XTVPF	1:1.58	-0.01	2506.00	39750	0.0	14.90	14.12	50	0	Top	0	N/A	0.816	0.270	1.197	0.977	0.323	0.611		12.0	
Body	LTE Band 41	20	QPSK	3b	XTVPF	1:1.58	0.00	2506.00	39750	0.0	14.90	14.04	50	50	Top	0	N/A	0.795	0.262	1.213	0.969	0.319	0.606		12.0	
Body	LTE Band 41	20	QPSK	3b	XTVPF	1:2.31	-0.01	2506.00	39750	0.0	16.50	15.81	50	0	Top	0	N/A	0.886	0.266	1.172	0.945	0.312	0.591		12.1	
Body	LTE Band 41	20	QPSK	3b	XTVPF	1:2.31	0.01	2506.00	39750	0.0	16.50	15.73	50	50	Top	0	N/A	0.787	0.258	1.194	0.940	0.308	0.588		12.1	
Body	LTE Band 41	20	QPSK	3b	XTVPF	1:1.58	-0.01	2549.50	40185	0.0	14.90	14.16	50	25	Top	0	N/A	0.744	0.243	1.186	0.882	0.288	0.551		12.4	
Body	LTE Band 41	20	QPSK	3b	XTVPF	1:1.58	0.02	2593.00	40620	0.0	14.90	14.15	50	25	Top	0	N/A	0.729	0.228	1.189	0.879	0.282	0.549		12.5	
Body	LTE Band 41	20	QPSK	3b	XTVPF	1:1.58	0.02	2636.50	41055	0.0	14.90	14.06	50	25	Top	0	N/A	0.690	0.220	1.213	0.837	0.267	0.523		12.7	12.0
Body	LTE Band 41	20	QPSK	3b	XTVPF	1:1.58	0.04	2680.00	41490	0.0	14.90	14.15	50	25	Top	0	N/A	0.697	0.220	1.189	0.829	0.262	0.518		12.7	
Body	LTE Band 41	20	QPSK	3b	XTVPF	1:1.58	0.01	2549.50	40185	0.0	14.90	14.12	100	0	Top	0	N/A	0.742	0.242	1.197	0.885	0.290	0.555		12.4	
Body	LTE Band 41	20	QPSK	3b	XTVPF	1:1.58	0.02	2549.50	40185	0.0	14.90	14.13	1	50	Bottom	0	N/A	0.611	0.211	1.194	0.813	0.257	0.013		31.9	
Body	LTE Band 41	20	QPSK	3b	XTVPF	1:1.58	0.01	2549.50	40185	0.0	14.90	14.16	50	25	Bottom	0	N/A	0.605	0.044	1.186	0.006	0.005	0.004		34.2	
Body	LTE Band 41	20	QPSK	3b	XTVPF	1:1.58	-0.09	2549.50	40185	0.0	14.90	14.13	1	50	Right	0	N/A	0.030	0.012	1.194	0.036	0.014	0.023		26.4	
Body	LTE Band 41	20	QPSK	3b	XTVPF	1:1.58	0.08	2549.50	40185	0.0	14.90	14.16	50	25	Right	0	N/A	0.030	0.012	1.186	0.036	0.014	0.023		26.4	
Body	LTE Band 41	20	QPSK	3b	XTVPF	1:1.58	-0.13	2549.50	40185	0.0	14.90	14.13	1	50	Left	0	N/A	0.011	0.001	1.194	0.021	0.006	0.005		27.8	
Body	LTE Band 41	20	QPSK	3b	XTVPF	1:1.58	-0.15	2549.50	40185	0.0	14.90	14.16	50	25	Left	0	N/A	0.011	0.001	1.186	0.025	0.012	0.016		27.8	
Body	LTE Band 41	20	QPSK	3b	XTVPF	1:1.58	-0.05	2506.00	39750	0.0	14.90	14.03	50	50	Top	0	LECA 41C	0.788	0.259	1.222	0.963	0.316	0.602		12.1	
Body	LTE Band 41	20	QPSK	3b	XTVPF	1:2.31	0.02	2525.80	39948	0.0	16.50	15.88	50	50	Top	0	LECA 41C	0.803	0.263	1.153	0.926	0.303	0.579		12.2	
ANSI/IEEE C63.1-1992 - SAFETY LIMIT																										
Spatial Peak																										
Uncontrolled Exposure/General Population																										
Body																										
1.6 W/kg (mW/g)																										
averaged over 1 gram																										

Table 10-42 Antenna 4

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPE [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Add'l Info	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #	PLimit [dBm]	Overall PLimit [dBm]	
Body	LTE Band 41	20	QPSK	4	JWGMJ	1:1.58	-0.11	2506.00	39750	0.0	13.20	12.68	1	50	Back	0	N/A	0.678	0.233	1.127	0.764	0.263	0.478		11.4		
Body	LTE Band 41	20	QPSK	4	JWGMJ	1:1.58	-0.01	2549.50	40185	0.0	13.20	12.69	1	50	Back	0	N/A	0.733	0.252	1.125	0.825	0.284	0.536		11.0		
Body	LTE Band 41	20	QPSK	4	JWGMJ	1:1.58	0.02	2593.00	40620	0.0	13.20	12.62	1	99	Back	0	N/A	0.774	0.267	1.143	0.885	0.305	0.553		10.7		
Body	LTE Band 41	20	QPSK	4	JWGMJ	1:1.58	-0.01	2636.50	41055	0.0	13.20	12.59	1	99	Back	0	N/A	0.799	0.276	1.151	0.920	0.318	0.575		10.6		
Body	LTE Band 41	20	QPSK	4	JWGMJ	1:1.58	0.14	2680.00	41490	0.0	13.20	12.53	1	50	Back	0	N/A	0.777	0.269	1.167	0.907	0.313	0.567		10.6		
Body	LTE Band 41	20	QPSK	4	JWGMJ	1:1.58	-0.07	2506.00	39750	0.0	13.20	12.74	50	0	Back	0	N/A	0.688	0.239	1.112	0.776	0.266	0.485		11.3		
Body	LTE Band 41	20	QPSK	4	JWGMJ	1:1.58	0.07	2549.50	40185	0.0	13.20	12.75	50	25	Back	0	N/A	0.749	0.258	1.109	0.831	0.286	0.519		11.0		
Body	LTE Band 41	20	QPSK	4	JWGMJ	1:1.58	0.04	2593.00	40620	0.0	13.20	12.68	50	25	Back	0	N/A	0.788	0.271	1.127	0.888	0.305	0.555		10.7		
Body	LTE Band 41	20	QPSK	4	JWGMJ	1:1.58	0.00	2636.50	41055	0.0	13.20	12.66	50	25	Back	0	N/A	0.805	0.277	1.132	0.911	0.314	0.569		10.6		
Body	LTE Band 41	20	QPSK	4	JWGMJ	1:1.58	0.00	2680.00	41490	0.0	13.20	12.55	50	25	Back	0	N/A	0.795	0.272	1.161	0.923	0.316	0.577		10.5		
Body	LTE Band 41	20	QPSK	4	JWGMJ	1:1.58	0.00	2680.00	41490	0.0	13.20	12.52	50	0	Back	0	N/A	0.796	0.274	1.169	0.931	0.320	0.582		10.5		
Body	LTE Band 41	20	QPSK	4	JWGMJ	1:2.31	-0.01	2680.00	41490	0.0	14.80	14.22	50	25	Back	0	N/A	0.743	0.257	1.143	0.847	0.294	0.529		10.9		
Body	LTE Band 41	20	QPSK	4	JWGMJ	1:2.31	0.00	2680.00	41490	0.0	14.80	14.15	50	0	Back	0	N/A	0.739	0.257	1.161	0.858	0.298	0.536		10.8		
Body	LTE Band 41	20	QPSK	4	JWGMJ	1:1.58	0.05	2549.50	40185	0.0	13.20	12.68	100	0	Back	0	N/A	0.750	0.258	1.127	0.845	0.291	0.528		10.9		
Body	LTE Band 41	20	QPSK	4	JWGMJ	1:1.58	0.02	2549.50	40185	0.0	13.20	12.69	1	50	Top	0	N/A	0.753	0.070	1.125	0.217	0.079	0.136		16.8		
Body	LTE Band 41	20	QPSK	4	JWGMJ	1:1.58	0.08	2549.50	40185	0.0	13.20	12.75	50	25	Top	0	N/A	0.799	0.071	1.109	0.221	0.079	0.138		16.8		
Body	LTE Band 41	20	QPSK	4	JWGMJ	1:1.58	-0.04	2549.50	40185	0.0	13.20	12.69	1	50	Bottom	0	N/A	0.655	0.014	1.125	0.017	0.006	0.011		27.9		
Body	LTE Band 41	20	QPSK	4	JWGMJ	1:1.58	0.08	2549.50	40185	0.0	13.20	12.75	50	25	Bottom	0	N/A	0.909	0.007	1.109	0.010	0.008	0.006		30.2		
Body	LTE Band 41	20	QPSK	4	JWGMJ	1:1.58	0.08	2549.50	40185	0.0	13.20	12.69	1	50	Right	0	N/A	0.604	0.004	1.125	0.005	0.005	0.003		33.7		
Body	LTE Band 41	20	QPSK	4	JWGMJ	1:1.58	0.04	2549.50	40185	0.0	13.20	12.75	50	25	Right	0	N/A	0.608	0.006	1.109	0.006	0.007	0.006		30.7		
Body	LTE Band 41	20	QPSK	4	JWGMJ	1:1.58	0.06	2506.00	39750	0.0	13.20	12.68	1	50	Left	0	N/A	0.490	0.170	1.127	0.552	0.192	0.345		12.8		
Body	LTE Band 41	20	QPSK	4	JWGMJ	1:1.58	-0.01	2549.50	40185	0.0	13.20	12.69	1	50	Left	0	N/A	0.561	0.191	1.125	0.631	0.215	0.394		12.2		
Body	LTE Band 41	20	QPSK	4	JWGMJ	1:1.58	-0.02	2593.00	40620	0.0	13.20	12.62	1	99	Left	0	N/A	0.592	0.199	1.143	0.677	0.227	0.423		11.9		
Body	LTE Band 41	20	QPSK	4	JWGMJ	1:1.58	-0.05	2636.50	41055	0.0	13.20	12.58	1	99	Left	0	N/A	0.623	0.207	1.151	0.717	0.238	0.448		11.6		
Body	LTE Band 41	20	QPSK	4	JWGMJ	1:1.58	-0.05	2680.00	41490	0.0	13.20	12.53	1	50	Left	0	N/A	0.636	0.209	1.167	0.742	0.244	0.464		11.5		
Body	LTE Band 41	20	QPSK	4	JWGMJ	1:1.58	-0.03	2506.00	39750	0.0	13.20	12.74	50	0	Left	0	N/A	0.482	0.166	1.112	0.536	0.185	0.335		12.9		
Body	LTE Band 41	20	QPSK	4	JWGMJ	1:1.58	0.00	2549.50	40185	0.0	13.20	12.75	50	25	Left	0	N/A	0.735	0.195	1.109	0.638	0.216	0.399		12.2		
Body	LTE Band 41	20	QPSK	4	JWGMJ	1:1.58	0.02	2593.00	40620	0.0	13.20	12.68	50	25	Left	0	N/A	0.650	0.205	1.127	0.687	0.231	0.429		11.8		
Body	LTE Band 41	20	QPSK	4	JWGMJ	1:1.58	0.05	2636.50	41055	0.0	13.20	12.66	50	25	Left	0	N/A	0.681	0.210	1.132	0.714	0.238	0.446		11.7		
Body	LTE Band 41	20	QPSK	4	JWGMJ	1:1.58	0.04	2680.00	41490	0.0	13.20	12.55	50	25	Left	0	N/A	0.646	0.213	1.161	0.752	0.247	0.470		11.4		
Body	LTE Band 41	20	QPSK	4	JWGMJ	1:1.58	0.08	2680.00	41490	0.0	13.20	12.43	50	0	Back	0	UKCA 41C	0.756	0.262	1.194	0.903	0.313	0.564		10.6		
Body	LTE Band 41	20	QPSK	4	JWGMJ	1:2.31	-0.01	2680.00	41490	0.0	14.80	14.19	50	0	Back	0	UKCA 41C	0.757	0.260	1.151	0.871	0.299	0.544		10.7		
ANSI/IEEE C63.1 1992 - SAFETY LIMIT																		Body									
Spatial Peak																		1.6 W/kg (mW/g)									
Uncontrolled Exposure (General Population)																		averaged over 1 gram									

Note: Green entry represents HPLME measurement

Note: Green entry represents HPUE measurement

10.15 LTE Band 48 Standalone SAR

Table 10-43 Antenna 1a

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPE [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Add'l Info	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #	PLimit [dBm]	Overall PLimit [dBm]	
Body	LTE Band 48	20	QPSK	1a	MNTWW	1:1.58	0.14	3560.00	53340	0.0	12.50	11.00	1	50	Back	0	N/A	0.500	0.143	1.413	0.707	0.202	0.442		11.0		
Body	LTE Band 48	20	QPSK	1a	MNTWW	1:1.58	0.02	3603.30	53773	0.0	12.50	10.92	1	50	Back	0	N/A	0.584	0.170	1.439	0.840	0.245	0.525		10.3		
Body	LTE Band 48	20	QPSK	1a	MNTWW	1:1.58	0.03	3646.70	56207	0.0	12.50	10.94	1	50	Back	0	N/A	0.587	0.200	1.466	0.934	0.306	0.594		9.8		
Body	LTE Band 48	20	QPSK	1a	MNTWW	1:1.58	0.11	3690.00	56640	0.0	12.50	10.81	1	50	Back	0	N/A	0.551	0.155	1.476	0.813	0.229	0.508		10.4		
Body	LTE Band 48	20	QPSK	1a	MNTWW	1:1.58	0.08	3560.00	53340	0.0	12.50	11.09	50	25	Back	0	N/A	0.505	0.148	1.384	0.704	0.205	0.440		11.0		
Body	LTE Band 48	20	QPSK	1a	MNTWW	1:1.58	0.11	3603.30	53773	0.0	12.50	11.05	50	25	Back	0	N/A	0.570	0.166	1.396	0.756	0.230	0.488		10.5		
Body	LTE Band 48	20	QPSK	1a	MNTWW	1:1.58	0.06	3646.70	56207	0.0	12.50	10.94	50	25	Back	0	N/A	0.668	0.197	1.432	0.957	0.282	0.598		8.7		
Body	LTE Band 48	20	QPSK	1a	MNTWW	1:1.58	0.15	3646.70	56207	0.0	12.50	10.89	50	0	Back	0	N/A	0.674	0.196	1.449	0.977	0.284	0.611		9.6		
Body	LTE Band 48	20	QPSK	1a	MNTWW	1:1.58	0.15	3690.00	56640	0.0	12.50	10.88	50	25	Back	0	N/A	0.626	0.202	1.452	0.909	0.293	0.568		9.9		
Body	LTE Band 48	20	QPSK	1a	MNTWW	1:1.58	0.05	3560.00	53340	0.0	12.50	10.99	100	0	Back	0	N/A	0.546	0.160	1.416	0.773	0.227	0.483		10.6		
Body	LTE Band 48	20	QPSK	1a	MNTWW	1:1.58	0.06	3560.00	53340	0.0	12.50	11.00	1	50	Top	0	N/A	0.600	0.000	1.413	0.000	0.000	0.000		48.0		
Body	LTE Band 48	20	QPSK	1a	MNTWW	1:1.58	0.05	3560.00	53340	0.0	12.50	11.09	50	25	Top	0	N/A	0.600	0.000	1.384	0.000	0.000	0.000		48.1		
Body	LTE Band 48	20	QPSK	1a	MNTWW	1:1.58	0.12	3560.00	53340	0.0	12.50	11.00	1	50	Bottom	0	N/A	0.518	0.040	1.413	0.195	0.057	0.121		16.6		
Body	LTE Band 48	20	QPSK	1a	MNTWW	1:1.58	0.03	3560.00	53340	0.0	12.50	11.09	50	25	Bottom	0	N/A	0.540	0.040	1.384	0.194	0.055	0.121		16.6		
Body	LTE Band 48	20	QPSK	1a	MNTWW	1:1.58	0.02	3560.00	53340	0.0	12.50	11.00	1	50	Right	0	N/A	0.600	0.000	1.413	0.000	0.000	0.000		48.0		
Body	LTE Band 48	20	QPSK	1a	MNTWW	1:1.58	0.09	3560.00	53340	0.0	12.50	11.09	50	25	Right	0	N/A	0.600	0.000	1.384	0.000	0.000	0.000		48.1		
Body	LTE Band 48	20	QPSK	1a	MNTWW	1:1.58	0.05	3560.00	53340	0.0	12.50	11.00	1	50	Left	0	N/A	0.506	0.147	1.413	0.757	0.208	0.473		10.7		
Body	LTE Band 48	20	QPSK	1a	MNTWW	1:1.58	0.00	3603.30	53773	0.0	12.50	10.92	1	50	Left	0	N/A	0.552	0.150	1.439	0.794	0.216	0.486		10.5		
Body	LTE Band 48	20	QPSK	1a	MNTWW	1:1.58	-0.02	3646.70	56207	0.0	12.50	10.94	1	50	Left	0	N/A	0.525	0.138	1.466	0.770	0.202	0.481		10.6		
Body	LTE Band 48	20	QPSK	1a	MNTWW	1:1.58	0.04	3690.00	56640	0.0	12.50	10.86	1	50	Left	0	N/A	0.623	0.158	1.476	0.820	0.241	0.575		9.9		
Body	LTE Band 48	20	QPSK	1a	MNTWW	1:1.58	0.07	3560.00	53340	0.0	12.50	11.09	50	25	Left	0	N/A	0.498	0.137	1.384	0.689	0.190	0.431		11.1		
Body	LTE Band 48	20	QPSK	1a	MNTWW	1:1.58	0.02	3603.30	53773	0.0	12.50	11.05	50	25	Left	0	N/A	0.567	0.153	1.396	0.792	0.214	0.495		10.5		
Body	LTE Band 48	20	QPSK	1a	MNTWW	1:1.58	0.03	3646.70	56207	0.0	12.50	10.94	50	25	Left	0	N/A	0.576	0.154	1.432	0.825	0.215	0.495		10.3		
Body	LTE Band 48	20	QPSK	1a	MNTWW	1:1.58	0.01	3690.00	56640	0.0	12.50	10.88	50	25	Left	0	N/A	0.558	0.147	1.452	0.810	0.213	0.506		10.4		
Body	LTE Band 48	20	QPSK	1a	MNTWW	1:1.58	0.09	3560.00	53340	0.0	12.50	10.99	100	0	Left	0	N/A	0.620	0.169	1.416	0.878	0.239	0.549		10.1		
Body	LTE Band 48	20	QPSK	1a	MNTWW	1:1.58	0.09	3646.70	56207	0.0	12.50	10.79	50	0	Left	0	N/A	0.620	0.169	1.416	0.878	0.239	0.549		10.1		
Body	LTE Band 48	20	QPSK	1a	MNTWW	1:1.58	0.09	3626.90	56009	0.0	12.50	10.79	50	0	Left	0	LUCA-ABC	0.650	0.190	1.483	0.964	0.282	0.603		9.7		
ANSI/IEEE C95.1-1992 - SAFETY LIMIT																											
Special Peak																		Body									
Uncontrolled Exposure (General Population)																		Reported 1g SAR [W/kg]									

Table 10-109 Absorbed Power Density Data - Antenna 5T

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Add'l Info	Measured APD [W/m ² (4cm ²)]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported APD [W/m ² (4cm ²)]	Adjusted APD [W/m ² (4cm ²)]	APD Exposure Ratio
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	5T	YRWWVW	97.74	-0.16	6025	15	68.1	12.75	12.55	Back	0	V2	0.534	1.047	1.023	0.551	0.551	0.028
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	5T	YRWWVW	97.74	0.05	6025	15	68.1	12.75	12.55	Top	0	V2	0.005	1.047	1.023	0.005	0.005	0.000
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	5T	YRWWVW	97.74	0.01	6025	15	68.1	12.75	12.55	Bottom	0	V2	0.027	1.047	1.023	0.029	0.029	0.001
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	5T	YRWWVW	97.74	0.02	6025	15	68.1	12.75	12.55	Right	0	V2	4.239	1.047	1.023	4.531	4.531	0.227
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	5T	YRWWVW	97.74	-0.03	6345	79	68.1	12.50	11.77	Right	0	V2	4.370	1.183	1.023	5.289	5.289	0.264
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	5T	YRWWVW	97.74	-0.11	6505	111	68.1	12.50	11.57	Right	0	V2	4.570	1.130	1.023	5.283	5.283	0.264
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	5T	YRWWVW	97.74	0.04	6665	143	68.1	12.25	11.68	Right	0	V2	4.760	1.140	1.023	5.551	5.551	0.278
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	5T	YRWWVW	97.74	-0.03	6985	207	68.1	12.00	11.86	Right	0	V2	5.930	1.033	1.023	6.267	6.267	0.313
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	5T	J9M47	97.74	-0.04	6985	207	68.1	12.00	11.86	Right	0	V1	5.120	1.033	1.023	5.411	5.411	0.271
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	5T	YRWWVW	97.74	0.08	6025	15	68.1	12.75	12.55	Left	0	V2	0.031	1.047	1.023	0.033	0.033	0.002
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	5T	YRWWVW	97.74	0.04	6025	15	68.1	8.25	7.38	Right	0	V2	1.230	1.279	1.023	1.609	1.609	0.080

10.33 2.4 GHz Bluetooth SISO Standalone SAR

Table 10-110 Antenna 1a

Exposure	Band / Mode	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Add'l Info	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #
Body	2.4 GHz Bluetooth	FHSS	1a	HYVGG	76.97	-0.07	2402	0	1	12.50	10.96	Back	0	V1	0.759	0.272	1.426	1.007	1.090	0.391	0.681	
Body	2.4 GHz Bluetooth	FHSS	1a	7N1KV	76.97	0.15	2402	0	1	12.50	10.52	Back	0	V2	0.678	0.269	1.578	1.007	1.077	0.427	0.673	
Body	2.4 GHz Bluetooth	FHSS	1a	HYVGG	76.97	0.00	2441	39	1	12.50	11.02	Back	0	V1	0.691	0.246	1.406	1.007	0.978	0.348	0.611	
Body	2.4 GHz Bluetooth	FHSS	1a	HYVGG	76.97	0.04	2480	78	1	12.50	10.88	Back	0	V1	0.741	0.263	1.452	1.007	1.083	0.385	0.677	
Body	2.4 GHz Bluetooth	FHSS	1a	HYVGG	76.97	0.08	2441	39	1	12.50	11.02	Top	0	V1	0.005	0.002	1.406	1.007	0.007	0.003	0.004	
Body	2.4 GHz Bluetooth	FHSS	1a	HYVGG	76.97	0.20	2441	39	1	12.50	11.02	Bottom	0	V1	0.214	0.068	1.406	1.007	0.303	0.096	0.189	
Body	2.4 GHz Bluetooth	FHSS	1a	HYVGG	76.97	0.07	2441	39	1	12.50	11.02	Right	0	V1	0.000	0.000	1.406	1.007	0.000	0.000	0.000	
Body	2.4 GHz Bluetooth	FHSS	1a	HYVGG	76.97	-0.07	2402	0	1	12.50	10.96	Left	0	V1	0.584	0.201	1.426	1.007	0.839	0.289	0.524	
Body	2.4 GHz Bluetooth	FHSS	1a	HYVGG	76.97	0.02	2441	39	1	12.50	11.02	Left	0	V1	0.673	0.228	1.406	1.007	0.953	0.323	0.596	
Body	2.4 GHz Bluetooth	FHSS	1a	HYVGG	76.97	-0.01	2480	78	1	12.50	10.88	Left	0	V1	0.742	0.247	1.452	1.007	1.085	0.361	0.678	
Body	2.4 GHz Bluetooth	FHSS	1a	HYVGG	76.97	0.01	2480	78	1	8.00	7.41	Back	0	V1	0.328	0.117	1.146	1.007	0.378	0.135	0.236	
Body	2.4 GHz Bluetooth	FHSS	1a	HYVGG	76.97	0.03	2480	78	1	8.00	7.41	Bottom	0	V1	0.084	0.025	1.146	1.007	0.097	0.029	0.061	
Body	2.4 GHz Bluetooth	FHSS	1a	HYVGG	76.97	0.11	2480	78	1	8.00	7.41	Left	0	V1	0.296	0.101	1.146	1.007	0.342	0.117	0.214	
Body	2.4 GHz Bluetooth	FHSS	1a	HYVGG	76.97	-0.14	2480	78	1	5.00	4.51	Back	0	V1	0.172	0.060	1.256	1.007	0.218	0.076	0.136	
Body	2.4 GHz Bluetooth	FHSS	1a	HYVGG	76.97	-0.19	2480	78	1	5.00	4.51	Bottom	0	V1	0.043	0.013	1.256	1.007	0.054	0.016	0.034	
Body	2.4 GHz Bluetooth	FHSS	1a	HYVGG	76.97	0.00	2480	78	1	5.00	4.51	Left	0	V1	0.154	0.052	1.256	1.007	0.195	0.066	0.122	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT															Body 1.6 W/kg (mW/g) averaged over 1 gram							
Spatial Peak Uncontrolled Exposure/General Population																						

Note: The reported SAR was scaled to the 77.5% transmission duty factor to determine compliance since the duty factor of the device is permanently limited to 77.5% per manufacturer.

Table 10-111 Antenna 3a

Exposure	Band / Mode	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Add'l Info	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #
Body	2.4 GHz Bluetooth	FHSS	3a	J9M47	76.88	0.02	2441	39	1	12.00	11.58	Back	0	V1	0.498	0.226	1.102	1.008	0.553	0.251	0.346	
Body	2.4 GHz Bluetooth	FHSS	3a	J9M47	76.88	0.02	2441	39	1	12.00	11.58	Top	0	V1	0.345	0.111	1.102	1.008	0.383	0.123	0.239	
Body	2.4 GHz Bluetooth	FHSS	3a	J9M47	76.88	0.06	2441	39	1	12.00	11.58	Bottom	0	V1	0.002	0.000	1.102	1.008	0.002	0.000	0.001	
Body	2.4 GHz Bluetooth	FHSS	3a	J9M47	76.88	0.01	2402	0	1	12.00	11.25	Right	0	V1	0.905	0.327	1.189	1.008	1.085	0.392	0.678	
Body	2.4 GHz Bluetooth	FHSS	3a	20V16	76.88	0.04	2402	0	1	12.00	11.26	Right	0	V2	0.876	0.314	1.186	1.008	1.047	0.375	0.654	
Body	2.4 GHz Bluetooth	FHSS	3a	J9M47	76.88	0.02	2441	39	1	12.00	11.58	Right	0	V1	0.972	0.350	1.102	1.008	1.080	0.389	0.675	A33
Body	2.4 GHz Bluetooth	FHSS	3a	J9M47	76.88	-0.03	2480	78	1	12.00	11.07	Right	0	V1	0.780	0.277	1.239	1.008	0.974	0.346	0.609	
Body	2.4 GHz Bluetooth	FHSS	3a	J9M47	76.88	0.03	2441	39	1	12.00	11.58	Left	0	V1	0.000	0.000	1.102	1.008	0.000	0.000	0.000	
Body	2.4 GHz Bluetooth	FHSS	3a	J9M47	76.88	-0.07	2480	78	1	7.50	7.02	Back	0	V1	0.115	0.050	1.117	1.008	0.129	0.056	0.081	
Body	2.4 GHz Bluetooth	FHSS	3a	J9M47	76.88	-0.04	2480	78	1	7.50	7.02	Top	0	V1	0.107	0.034	1.117	1.008	0.120	0.038	0.075	
Body	2.4 GHz Bluetooth	FHSS	3a	J9M47	76.88	0.04	2480	78	1	7.50	7.02	Right	0	V1	0.249	0.089	1.117	1.008	0.280	0.100	0.175	
Body	2.4 GHz Bluetooth	FHSS	3a	J9M47	76.88	0.15	2480	78	1	5.00	4.47	Back	0	V1	0.063	0.027	1.130	1.008	0.072	0.031	0.045	
Body	2.4 GHz Bluetooth	FHSS	3a	J9M47	76.88	0.05	2480	78	1	5.00	4.47	Top	0	V1	0.054	0.016	1.130	1.008	0.062	0.018	0.039	
Body	2.4 GHz Bluetooth	FHSS	3a	J9M47	76.88	0.04	2480	78	1	5.00	4.47	Right	0	V1	0.140	0.049	1.130	1.008	0.159	0.056	0.099	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT												Body 1.6 W/kg (mW/g) averaged over 1 gram										
Spatial Peak Uncontrolled Exposure/General Population																						

Note: The reported SAR was scaled to the 77.5% transmission duty factor to determine compliance since the duty factor of the device is permanently limited to 77.5% per manufacturer.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by:
DUT Type: Tablet Device		Technical Manager
		Page 234 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

10.34 802.15.4 Standalone SAR

Table 10-112 Antenna 1a

Exposure	Band / Mode	Ant.	Serial Number	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Add'l Info	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #
Body	802.15.4	1a	HYGFG	0.04	2405	11	1	12.50	11.21	Back	0	V1	1.270	0.457	1.346	1.026	0.369	0.641	
Body	802.15.4	1a	PYZL1	0.06	2405	11	1	12.50	11.10	Back	0	V2	1.090	0.391	1.380	0.903	0.324	0.564	
Body	802.15.4	1a	HYGFG	0.02	2440	18	1	12.50	11.05	Back	0	V1	1.130	0.402	1.396	0.946	0.337	0.591	
Body	802.15.4	1a	HYGFG	0.02	2475	25	1	12.50	11.37	Back	0	V1	0.824	0.291	1.297	0.641	0.226	0.401	
Body	802.15.4	1a	HYGFG	-0.05	2475	25	1	12.50	11.37	Top	0	V1	0.005	0.002	1.297	0.004	0.002	0.003	
Body	802.15.4	1a	HYGFG	-0.02	2475	25	1	12.50	11.37	Bottom	0	V1	0.359	0.112	1.297	0.279	0.087	0.174	
Body	802.15.4	1a	HYGFG	0.02	2475	25	1	12.50	11.37	Right	0	V1	0.000	0.000	1.297	0.000	0.000	0.000	
Body	802.15.4	1a	HYGFG	0.02	2405	11	1	12.50	11.21	Left	0	V1	0.824	0.280	1.346	0.665	0.226	0.416	
Body	802.15.4	1a	HYGFG	-0.01	2440	18	1	12.50	11.05	Left	0	V1	0.854	0.288	1.396	0.715	0.242	0.447	
Body	802.15.4	1a	HYGFG	-0.02	2475	25	1	12.50	11.37	Left	0	V1	1.170	0.391	1.297	0.910	0.304	0.569	
Body	802.15.4	1a	HYGFG	0.06	2475	25	1	8.00	7.20	Back	0	V1	0.452	0.155	1.202	0.326	0.112	0.204	
Body	802.15.4	1a	HYGFG	0.01	2475	25	1	8.00	7.20	Bottom	0	V1	0.117	0.037	1.202	0.084	0.027	0.053	
Body	802.15.4	1a	HYGFG	0.03	2475	25	1	8.00	7.20	Left	0	V1	0.422	0.144	1.202	0.304	0.104	0.190	
Body	802.15.4	1a	HYGFG	-0.02	2475	25	1	5.50	4.77	Back	0	V1	0.241	0.086	1.183	0.171	0.061	0.107	
Body	802.15.4	1a	HYGFG	0.13	2475	25	1	5.50	4.77	Bottom	0	V1	0.068	0.021	1.183	0.048	0.015	0.030	
Body	802.15.4	1a	HYGFG	0.02	2475	25	1	5.50	4.77	Left	0	V1	0.233	0.079	1.183	0.165	0.056	0.103	
ANSI/IEEE C38.1.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram									

Note: Manufacturer declared that maximum source-based duty cycle of 802.15.4 mode is permanently limited to 60%. SAR measurement for 802.15.4 is evaluated at higher duty cycle of 100% and scaled down to 60%.

Table 10-113 Antenna 3a

Exposure	Band / Mode	Ant.	Serial Number	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Add'l Info	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #
Body	802.15.4	3a	J9M47	0.01	2440	18	1	12.50	11.78	Back	0	V1	0.435	0.191	1.180	0.308	0.135	0.193	
Body	802.15.4	3a	J9M47	-0.06	2440	18	1	12.50	11.78	Top	0	V1	0.514	0.165	1.180	0.364	0.117	0.228	
Body	802.15.4	3a	J9M47	0.04	2440	18	1	12.50	11.78	Bottom	0	V1	0.030	0.013	1.180	0.021	0.009	0.013	
Body	802.15.4	3a	20IV6	0.03	2405	11	1	12.50	11.10	Right	0	V2	1.170	0.405	1.380	0.969	0.335	0.606	
Body	802.15.4	3a	J9M47	0.05	2405	11	1	12.50	11.20	Right	0	V1	1.260	0.433	1.349	1.020	0.350	0.638	
Body	802.15.4	3a	J9M47	0.00	2440	18	1	12.50	11.78	Right	0	V1	1.420	0.484	1.180	1.005	0.343	0.628	
Body	802.15.4	3a	J9M47	0.08	2440	18	1	12.50	11.78	Right	0	V1	1.418	0.483	1.180	0.998	0.342	0.624	
Body	802.15.4	3a	J9M47	-0.20	2475	25	1	12.50	11.03	Right	0	V1	1.160	0.394	1.403	0.976	0.332	0.610	
Body	802.15.4	3a	J9M47	0.02	2440	18	1	12.50	11.78	Left	0	V1	0.002	0.000	1.180	0.001	0.000	0.001	
Body	802.15.4	3a	J9M47	-0.10	2475	25	1	8.00	7.06	Back	0	V1	0.126	0.054	1.242	0.094	0.040	0.059	
Body	802.15.4	3a	J9M47	-0.07	2475	25	1	8.00	7.06	Top	0	V1	0.137	0.041	1.242	0.102	0.031	0.064	
Body	802.15.4	3a	J9M47	-0.03	2475	25	1	8.00	7.06	Right	0	V1	0.457	0.160	1.242	0.341	0.119	0.213	
Body	802.15.4	3a	J9M47	0.09	2475	25	1	5.50	5.11	Back	0	V1	0.070	0.032	1.094	0.046	0.021	0.029	
Body	802.15.4	3a	J9M47	-0.07	2475	25	1	5.50	5.11	Top	0	V1	0.095	0.028	1.094	0.062	0.018	0.039	
Body	802.15.4	3a	J9M47	0.01	2475	25	1	5.50	5.11	Right	0	V1	0.263	0.093	1.094	0.173	0.061	0.108	
ANSI/IEEE C38.1.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram									

Note: Blue entry represents variability measurement

Note: Manufacturer declared that maximum source-based duty cycle of 802.15.4 mode is permanently limited to 60%. SAR measurement for 802.15.4 is evaluated at higher duty cycle of 100% and scaled down to 60%.

10.35 5 GHz NB U-NII 1 Standalone SAR

Table 10-114 Antenna 1b

Exposure	Band / Mode	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Add'l Info	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot
Body	NB U-NII 1	FHSS	1b	MMTNW	76.50	0.05	5245	High	4	10.50	9.44	Back	0	V2	0.629	0.186	1.276	1.013	0.813	0.240	0.508	
Body	NB U-NII 1	FHSS	1b	MMTNW	76.50	0.00	5162	Low	4	10.50	9.23	Back	0	V2	0.661	0.179	1.340	1.013	0.816	0.243	0.510	
Body	NB U-NII 1	FHSS	1b	MMTNW	76.50	0.12	5204	Mid	4	10.50	9.38	Back	0	V2	0.604	0.188	1.294	1.013	0.844	0.246	0.528	
Body	NB U-NII 1	FHSS	1b	MMTNW	76.50	0.02	5245	High	4	10.50	9.44	Top	0	V2	0.000	0.000	1.276	1.013	0.000	0.000	0.000	
Body	NB U-NII 1	FHSS	1b	MMTNW	76.50	-0.07	5245	High	4	10.50	9.44	Bottom	0	V2	0.673	0.169	1.276	1.013	0.870	0.218	0.544	
Body	NB U-NII 1	FHSS	1b	L4HWV	76.50	0.06	5245	High	4	10.50	9.85	Bottom	0	V1	0.639	0.158	1.161	1.013	0.752	0.186	0.470	
Body	NB U-NII 1	FHSS	1b	MMTNW	76.50	0.15	5162	Low	4	10.50	9.23	Bottom	0	V2	0.619	0.154	1.340	1.013	0.840	0.209	0.525	
Body	NB U-NII 1	FHSS	1b	MMTNW	76.50	-0.07	5204	Mid	4	10.50	9.38	Bottom	0	V2	0.642	0.158	1.294	1.013	0.842	0.207	0.526	
Body	NB U-NII 1	FHSS	1b	MMTNW	76.50	0.07	5245	High	4	10.50	9.44	Right	0	V2	0.005	0.000	1.276	1.013	0.005	0.000	0.004	
Body	NB U-NII 1	FHSS	1b	MMTNW	76.50	0.03	5245	High	4	10.50	9.44	Left	0	V2	0.056	0.002	1.276	1.013	0.021	0.003	0.013	
Body	NB U-NII 1	FHSS	1b	MMTNW	76.92	-0.13	5245	High	1	7.00	6.35	Back	0	V2	0.297	0.087	1.161	1.008	0.347	0.102	0.217	
Body	NB U-NII 1	FHSS	1b	MMTNW	76.92	-0.13	5245	High	1	7.00	6.35	Bottom	0	V2	0.314	0.076	1.161	1.008	0.367	0.089	0.229	
Body	NB U-NII 1	FHSS	1b	MMTNW	76.92	0.05	5245	High	1	4.50	4.25	Back	0	V2	0.116	0.033	1.059	1.008	0.124	0.035	0.078	
Body	NB U-NII 1	FHSS	1b	MMTNW	76.92	0.03	5245	High	1	4.50	4.25	Bottom	0	V2	0.153	0.035	1.059	1.008	0.163	0.037	0.102	
ANSI/IEEE C38.1.1 1992 - SAFETY LIMIT															Body							
Spatial Peak															1.6 W/kg (mW/g)							
Uncontrolled Exposure/General Population															averaged over 1 gram							

Note: The reported SAR was scaled to the 77.5% transmission duty factor to determine compliance since the duty factor of the device is permanently limited to 77.5% per manufacturer.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 235 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 10-115 Antenna 3b

Exposure	Band / Mode	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Add'l Info	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot
Body	NB U-NII 1	FHSS	3b	HXM56	76.50	-0.16	5162	Low	4	11.50	10.94	Back	0	V1	0.410	0.129	1.138	1.013	0.473	0.149	0.296	
Body	NB U-NII 1	FHSS	3b	HXM56	76.50	0.08	5245	High	4	11.50	10.86	Top	0	V1	0.871	0.218	1.159	1.013	1.025	0.256	0.641	
Body	NB U-NII 1	FHSS	3b	HXM56	76.50	-0.16	5245	High	4	11.50	10.86	Top	0	V1	0.931	0.233	1.159	1.013	1.093	0.274	0.683	
Body	NB U-NII 1	FHSS	3b	20V6	76.50	-0.03	5245	High	4	11.50	10.50	Top	0	V2	0.793	0.198	1.259	1.013	1.013	0.253	0.633	
Body	NB U-NII 1	FHSS	3b	HXM56	76.50	0.04	5162	Low	4	11.50	10.94	Top	0	V1	0.767	0.192	1.138	1.013	0.884	0.221	0.553	
Body	NB U-NII 1	FHSS	3b	HXM56	76.50	-0.06	5204	Mid	4	11.50	10.88	Top	0	V1	0.826	0.208	1.153	1.013	0.965	0.243	0.603	
Body	NB U-NII 1	FHSS	3b	HXM56	76.50	0.04	5162	Low	4	11.50	10.94	Bottom	0	V1	0.001	0.000	1.138	1.013	0.001	0.000	0.001	
Body	NB U-NII 1	FHSS	3b	HXM56	76.50	0.11	5162	Low	4	11.50	10.94	Right	0	V1	0.038	0.008	1.138	1.013	0.044	0.009	0.028	
Body	NB U-NII 1	FHSS	3b	HXM56	76.50	-0.15	5162	Low	4	11.50	10.94	Left	0	V1	0.011	0.000	1.138	1.013	0.013	0.000	0.008	
Body	NB U-NII 1	FHSS	3b	HXM56	77.14	-0.01	5245	High	1	7.00	5.99	Back	0	V1	0.116	0.033	1.262	1.005	0.147	0.042	0.092	
Body	NB U-NII 1	FHSS	3b	HXM56	77.14	0.00	5245	High	1	7.00	5.99	Top	0	V1	0.226	0.055	1.262	1.005	0.287	0.070	0.179	
Body	NB U-NII 1	FHSS	3b	HXM56	77.14	0.07	5162	Low	1	4.50	2.87	Back	0	V1	0.040	0.011	1.455	1.005	0.058	0.016	0.036	
Body	NB U-NII 1	FHSS	3b	HXM56	77.14	0.09	5162	Low	1	4.50	2.87	Top	0	V1	0.092	0.020	1.455	1.005	0.134	0.029	0.084	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT															Body							
Spatial Peak															1.6 W/kg (mW/g)							
Uncontrolled Exposure/General Population															averaged over 1 gram							

Note: Blue entry represents variability measurement

Note: The reported SAR was scaled to the 77.5% transmission duty factor to determine compliance since the duty factor of the device is permanently limited to 77.5% per manufacturer.

Table 10-116 Antenna 5T

Exposure	Band / Mode	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Add'l Info	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #
Body	NB U-NII 1	FHSS	5T	RRXWW	76.50	-0.09	5162	Low	4	12.50	11.62	Back	0	V1	0.021	0.007	1.225	1.013	0.026	0.009	0.016	
Body	NB U-NII 1	FHSS	5T	RRXWW	76.50	0.08	5162	Low	4	12.50	11.52	Top	0	V1	0.000	0.000	1.225	1.013	0.000	0.000	0.000	
Body	NB U-NII 1	FHSS	5T	RRXWW	76.50	0.02	5162	Low	4	12.50	11.62	Bottom	0	V1	0.000	0.000	1.225	1.013	0.000	0.000	0.000	
Body	NB U-NII 1	FHSS	5T	RRXWW	76.50	0.12	5162	Low	4	12.50	11.62	Right	0	V1	0.143	0.038	1.225	1.013	0.177	0.047	0.111	
Body	NB U-NII 1	FHSS	5T	20V6	76.50	0.07	5162	Low	4	12.50	11.35	Right	0	V2	0.135	0.033	1.303	1.013	0.178	0.044	0.111	
Body	NB U-NII 1	FHSS	5T	RRXWW	76.50	0.03	5162	Low	4	12.50	11.62	Left	0	V1	0.000	0.000	1.225	1.013	0.000	0.000	0.000	
Body	NB U-NII 1	FHSS	5T	20V6	76.50	-0.16	5204	Mid	4	12.00	10.84	Right	0	V2	0.124	0.033	1.306	1.013	0.164	0.044	0.103	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT												Body										
Spatial Peak												1.6 W/kg (mW/g)										
Uncontrolled Exposure/General Population												averaged over 1 gram										

Note: The reported SAR was scaled to the 77.5% transmission duty factor to determine compliance since the duty factor of the device is permanently limited to 77.5% per manufacturer.

10.36 5 GHz NB U-NII 3 Standalone SAR

Table 10-117 Antenna 1b

Exposure	Band / Mode	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Add'l Info	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #
Body	NB U-NII 3	FHSS	1b	7NLKV	76.97	-0.03	5844	High	1	11.00	10.30	Back	0	V2	0.903	0.273	1.175	1.007	1.068	0.323	0.668	
Body	NB U-NII 3	FHSS	1b	7NLKV	76.97	-0.15	5844	High	1	11.00	10.30	Back	0	V2	0.850	0.216	1.175	1.007	1.006	0.302	0.629	
Body	NB U-NII 3	FHSS	1b	7NLKV	76.97	-0.08	5733	Low	1	11.00	10.59	Back	0	V2	0.731	0.221	1.099	1.007	0.809	0.245	0.506	
Body	NB U-NII 3	FHSS	1b	7NLKV	76.97	-0.16	5789	Mid	1	11.00	10.91	Back	0	V2	0.960	0.323	1.021	1.007	0.990	0.332	0.681	A35
Body	NB U-NII 3	FHSS	1b	7NLKV	76.97	-0.01	5789	Mid	1	11.00	10.91	Back	0	V2	0.959	0.252	1.021	1.007	1.050	0.331	0.681	
Body	NB U-NII 3	FHSS	1b	J9M47	76.97	0.03	5789	Mid	1	11.00	10.49	Back	0	V1	0.951	0.285	1.125	1.007	1.077	0.323	0.673	
Body	NB U-NII 3	FHSS	1b	7NLKV	76.97	0.08	5789	Mid	1	11.00	10.91	Top	0	V2	0.000	0.000	1.021	1.007	0.000	0.000	0.000	
Body	NB U-NII 3	FHSS	1b	7NLKV	76.97	-0.05	5844	High	1	11.00	10.30	Bottom	0	V2	0.858	0.207	1.175	1.007	1.015	0.245	0.634	
Body	NB U-NII 3	FHSS	1b	7NLKV	76.97	-0.07	5733	Low	1	11.00	10.59	Bottom	0	V2	0.679	0.159	1.099	1.007	0.751	0.176	0.469	
Body	NB U-NII 3	FHSS	1b	7NLKV	76.97	0.03	5789	Mid	1	11.00	10.91	Bottom	0	V2	0.869	0.209	1.021	1.007	0.893	0.215	0.558	
Body	NB U-NII 3	FHSS	1b	7NLKV	76.97	0.01	5789	Mid	1	11.00	10.91	Right	0	V2	0.015	0.002	1.021	1.007	0.015	0.002	0.009	
Body	NB U-NII 3	FHSS	1b	7NLKV	76.97	0.04	5789	Mid	1	11.00	10.91	Left	0	V2	0.040	0.007	1.021	1.007	0.041	0.007	0.026	
Body	NB U-NII 3	FHSS	1b	7NLKV	76.97	-0.10	5789	Mid	1	6.50	5.54	Back	0	V2	0.321	0.093	1.247	1.007	0.403	0.117	0.252	
Body	NB U-NII 3	FHSS	1b	7NLKV	76.97	0.06	5789	Mid	1	6.50	5.54	Bottom	0	V2	0.262	0.062	1.247	1.007	0.329	0.078	0.206	
Body	NB U-NII 3	FHSS	1b	7NLKV	76.97	-0.13	5789	Mid	1	4.00	3.44	Back	0	V2	0.189	0.051	1.138	1.007	0.217	0.058	0.136	
Body	NB U-NII 3	FHSS	1b	7NLKV	76.97	0.16	5789	Mid	1	4.00	3.44	Bottom	0	V2	0.154	0.033	1.138	1.007	0.176	0.038	0.110	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT															Body							
Spatial Peak															1.6 W/kg (mW/g)							
Uncontrolled Exposure/General Population															averaged over 1 gram							

Note: Blue entry represents variability measurement

Note: The reported SAR was scaled to the 77.5% transmission duty factor to determine compliance since the duty factor of the device is permanently limited to 77.5% per manufacturer.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by:
DUT Type: Tablet Device		Technical Manager
		Page 236 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 10-118 Antenna 3b

Exposure	Band / Mode	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Add'l Info	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #
Body	NB U-NII 3	FHSS	3b	YRWWVW	76.97	-0.14	5733	Low	1	11.50	11.11	Back	0	V2	0.684	0.240	1.094	1.007	0.753	0.264	0.471	
Body	NB U-NII 3	FHSS	3b	YRWWVW	76.97	0.04	5844	High	1	11.50	10.98	Top	0	V2	0.886	0.220	1.127	1.007	1.005	0.250	0.628	
Body	NB U-NII 3	FHSS	3b	YRWWVW	76.97	-0.02	5733	Low	1	11.50	11.11	Top	0	V2	0.976	0.243	1.094	1.007	1.075	0.268	0.672	
Body	NB U-NII 3	FHSS	3b	HXM56	76.97	-0.03	5733	Low	1	11.50	11.32	Top	0	V1	1.040	0.263	1.042	1.007	1.091	0.276	0.682	
Body	NB U-NII 3	FHSS	3b	YRWWVW	76.97	-0.05	5789	Mid	1	11.50	11.03	Top	0	V2	0.909	0.227	1.114	1.007	1.020	0.255	0.638	
Body	NB U-NII 3	FHSS	3b	YRWWVW	76.97	0.05	5733	Low	1	11.50	11.11	Bottom	0	V2	0.020	0.000	1.094	1.007	0.020	0.000	0.000	
Body	NB U-NII 3	FHSS	3b	YRWWVW	76.97	0.08	5733	Low	1	11.50	11.11	Right	0	V2	0.032	0.002	1.094	1.007	0.035	0.004	0.022	
Body	NB U-NII 3	FHSS	3b	YRWWVW	76.97	0.04	5733	Low	1	11.50	11.11	Left	0	V2	0.013	0.000	1.094	1.007	0.014	0.000	0.009	
Body	NB U-NII 3	FHSS	3b	HXM56	76.97	0.06	5789	Mid	1	7.00	5.34	Back	0	V1	0.192	0.065	1.466	1.007	0.283	0.096	0.177	
Body	NB U-NII 3	FHSS	3b	HXM56	76.97	0.06	5789	Mid	1	7.00	5.34	Top	0	V1	0.244	0.058	1.466	1.007	0.360	0.086	0.225	
Body	NB U-NII 3	FHSS	3b	HXM56	76.97	0.14	5733	Low	1	4.50	2.60	Back	0	V1	0.090	0.028	1.549	1.007	0.140	0.044	0.088	
Body	NB U-NII 3	FHSS	3b	HXM56	76.97	0.06	5733	Low	1	4.50	2.60	Top	0	V1	0.139	0.032	1.549	1.007	0.217	0.050	0.136	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT																Body 1.6 W/kg (mW/g) averaged over 1 gram						
Spatial Peak Uncontrolled Exposure/General Population																						

Note: The reported SAR was scaled to the 77.5% transmission duty factor to determine compliance since the duty factor of the device is permanently limited to 77.5% per manufacturer.

Table 10-119 Antenna 5T

Exposure	Band / Mode	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Add'l Info	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #
Body	NB U-NII 3	FHSS	5T	20IV6	76.97	0.05	5733	Low	1	13.50	12.78	Back	0	V2	0.049	0.017	1.180	1.007	0.058	0.020	0.036	
Body	NB U-NII 3	FHSS	5T	20IV6	76.97	0.07	5733	Low	1	13.50	12.78	Top	0	V2	0.000	0.000	1.180	1.007	0.000	0.000	0.000	
Body	NB U-NII 3	FHSS	5T	20IV6	76.97	0.08	5733	Low	1	13.50	12.78	Bottom	0	V2	0.000	0.000	1.180	1.007	0.000	0.000	0.000	
Body	NB U-NII 3	FHSS	5T	20IV6	76.97	-0.06	5733	Low	1	13.50	12.78	Right	0	V2	0.410	0.118	1.180	1.007	0.487	0.140	0.304	
Body	NB U-NII 3	FHSS	5T	RRKXW	76.97	0.07	5733	Low	1	13.50	12.50	Right	0	V1	0.381	0.111	1.259	1.007	0.483	0.141	0.302	
Body	NB U-NII 3	FHSS	5T	20IV6	76.97	0.05	5733	Low	1	13.50	12.78	Left	0	V2	0.002	0.000	1.180	1.007	0.002	0.000	0.001	
Body	NB U-NII 3	FHSS	5T	20IV6	76.97	-0.11	5733	Low	1	12.00	10.80	Right	0	V2	0.331	0.093	1.318	1.007	0.439	0.123	0.274	
Body	NB U-NII 3	FHSS	5T	20IV6	76.97	0.17	5733	Low	1	9.50	8.15	Right	0	V2	0.174	0.047	1.365	1.007	0.239	0.065	0.149	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT																Body 1.6 W/kg (mW/g) averaged over 1 gram						
Spatial Peak Uncontrolled Exposure/General Population																						

Note: The reported SAR was scaled to the 77.5% transmission duty factor to determine compliance since the duty factor of the device is permanently limited to 77.5% per manufacturer.

10.37 wPT Standalone SAR

Table 10-120 WPT SAR standalone

Exposure	Band / Mode	Service / Modulation	Serial Number	Power Drift [dB]	Frequency [MHz]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Reported 1g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #
Body	wPT	CW	HYGFG	0.03	13.60	Back	0	0.027	0.027	0.017	A36
Body	wPT	CW	HYGFG	-0.01	13.60	Top	0	0.000	0.000	0.000	
Body	wPT	CW	HYGFG	0.03	13.60	Bottom	0	0.000	0.000	0.000	
Body	wPT	CW	HYGFG	0.09	13.60	Right	0	0.002	0.002	0.001	
Body	wPT	CW	HYGFG	0.08	13.60	Left	0	0.000	0.000	0.000	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT								Body 1.6 W/kg (mW/g) averaged over 1 gram			
Spatial Peak Uncontrolled Exposure/General Population											

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 237 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

10.38 SAR Test Notes

General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in FCC KDB Publication 616217 D04v01r02, and FCC KDB Publication 447498 D04v01.
2. Batteries are fully charged at the beginning of the SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D04v01.
6. Per FCC KDB 865664 D01v01r04, variability SAR tests were performed when the measured SAR results for a frequency band were greater than or equal to 0.8 W/kg. Repeated SAR measurements are highlighted in the tables above for clarity. Please see Section 11 for variability analysis.
7. FCC KDB Publication 616217 D04v01r02 Section 4.3, SAR tests are required for the back surface and edges of the tablet with the tablet touching the phantom. The SAR Exclusion Threshold in FCC KDB 447498 D04v01 was applied to determine SAR test exclusion for adjacent edge configurations.
8. This device uses Smart Transmit for WWAN operations to control and manage transmitting power in real time to ensure RF Exposure compliance. Per FCC Guidance, compliance for was assessed at the minimum of the time averaged power and the maximum output power for each band/mode/exposure condition (DSI).
9. The orange highlights throughout the report represent the highest scaled SAR per Equipment Class.
10. Per FCC guidance, SAR was performed using 6.5 GHz SAR probe calibration factors. Per October 2020 TCB Workshop notes, 5 channels were tested. Absorbed power density (APD) using a 4cm² averaging area is reported based on SAR measurements.

UMTS Notes:

1. UMTS mode was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. AMR and HSPA SAR were not required per the 3G Test Reduction Procedure in KDB Publication 941225 D01v03r01.
2. Per FCC KDB Publication 447498 D04v01, if the reported (scaled) SAR measured at the highest output power channel for each test configuration is ≤ 0.8 W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s).

LTE Notes:

1. LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r04. The general test procedures used for testing can be found in Section 7.5.4.
2. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
3. A-MPR was disabled for all SAR tests by setting NS=01 and MCC=001 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).
4. Per FCC KDB Publication 447498 D04v01, when the reported LTE Band 41 and LTE Band 48 SAR measured at the highest output power channel in a given a test configuration was > 0.6 W/kg for 1g evaluations, testing at the other channels was required for such test configurations.
5. TDD LTE was tested per the guidance provided in FCC KDB Publication 941225 D05v02r04. Testing was performed using UL-DL configuration 0 with 6 UL subframes and 2 S subframes using extended cyclic prefix only and special subframe configuration 6. SAR tests were performed at maximum output power and worst-case transmission duty factor in extended cyclic prefix. Per 3GPP 36.211 Section 4, the duty factor for special subframe configuration 6 using extended cyclic prefix is 0.633.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 238 of 255

REV 25.0
10/16/2024

6. Per KDB Publication 941225 D05Av01r02, SAR for downlink only LTE CA operations was not needed since the maximum average output power in LTE CA mode was not >0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive.
7. This device supports Power Class 2 and Power Class 3 operations for LTE Band 41. The highest available duty cycle for Power Class 2 operations is 43.3 % using UL-DL configuration 1. Per FCC Guidance, all SAR tests were performed using Power Class 3. SAR with power class 2 at the available duty factor was additionally performed for the power class 3 configuration with the highest SAR configuration for each exposure condition. Please see Section 12 for linearity results.
8. For LTE Band 5, LTE Band 7, LTE Band 41, and LTE Band 48, per FCC guidance, SAR was first measured with only a single carrier active in the uplink (carrier aggregation not active). For each exposure condition, the uplink CA scenario with two component carriers was additionally tested for the configuration with the highest SAR when carrier aggregation was not active. The SCC was configured with the closest available contiguous channel. The two component carriers were configured so the resource blocks are physically allocated side by side to achieve the maximum output power.
9. This device supports LTE Band 41 ULCA active with Power Class 2. Highest SAR test configuration for each exposure condition in Power Class 3 with ULCA active was repeated with Power Class 2 with ULCA active.
10. This device supports downlink 4x4 MIMO operations for some LTE Bands. Per May 2017 TCB Workshop Notes, SAR for 4x4 DL MIMO was not needed since the maximum average output power in 4x4 DL MIMO mode was not more than 0.25 dB higher than the maximum output power with 4x4 DL MIMO inactive. Additionally, SAR for 4x4 MIMO Downlink Carrier Aggregation was not needed since the maximum output power in 4x4 MIMO Downlink Carrier Aggregation mode was not more than 0.25 dB higher than the maximum output power with 4x4 MIMO Downlink and downlink carrier aggregation inactive.

NR Notes:

1. NR implementation supports SA and NSA modes. NR implementation in EN-DC mode operates with the LTE Bands shown in the NR FR1 checklist acting as anchor bands. Per FCC guidance, SAR tests for NR Bands and LTE Anchors Bands were performed separately due to limitations in SAR probe calibration factors.
2. Per FCC KDB Publication 447498 D04v01, when the reported SAR measured at the highest output power channel in a given a test configuration was > 0.4 W/kg for NR n77 C 1g evaluations, > 0.6 W/kg for NR n41 1g evaluations, and > 0.8 W/kg for NR n77 DoD, testing at the other channels was required for such test configurations.
3. Due to test setup limitations, SAR testing for NR was performed using test mode software to establish the connection.
4. Simultaneous transmission analysis for EN-DC operations is addressed in the Part 2 Test Report (Serial Number can be found in the bibliography).
5. This device additionally supports some EN-DC conditions where additional LTE carriers are added on the downlink only.
6. Per FCC Guidance, NR modulations and RB Sizes/Offsets were selected for testing such that configurations with the highest output power were evaluated for SAR tests.
7. This device supports Power Class 2 and Power Class 3 operations for NR Band n41, NR Band n77 DoD, and NR Band n77 C. The highest available duty cycle for Power Class 2 and Power Class 3 operations is 100.0 %. Per FCC Guidance, all SAR tests were performed using Power Class 2.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 239 of 255

REV 25.0
10/16/2024

WLAN Notes:

1. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4 GHz WIFI single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n/ax) was not required due to the maximum allowed powers and the highest reported DSSS SAR. See Section 7.6.4 for more information.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 5 GHz WIFI single transmission chain operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg for 1g evaluations. See Section 7.6.5 for more information.
3. Per KDB Publication 248227 D01v02r02, SAR for MIMO was evaluated by following the simultaneous SAR provisions from KDB Publication 447498 D04v01 by either evaluating the sum of the 1g SAR values of each antenna transmitting independently or making a SAR measurement with both antennas transmitting simultaneously. Please see Section 11 for complete analysis.
4. When the maximum reported 1g averaged SAR is ≤ 0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg for 1g evaluations or all test channels were measured.
5. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance. Procedures used to measure the duty factor are identical to that in the associated EMC test reports.
6. The time-averaged mechanism for WLAN operations was disabled for the above SAR measurements. The SAR was scaled to the maximum time-averaged output power.

Bluetooth/NB UNII Notes

1. Bluetooth/NB UNII SAR was evaluated with a test mode with hopping disabled with DH5 operation. The reported SAR was scaled to the 77.5% transmission duty factor to determine compliance since the duty factor of the device is limited to 77.5% per manufacturer. See Section 8.14 and 8.22 for the time domain plot and calculation for the duty factor of the device.

802.15.4 Notes:

1. The manufacturer declared that the maximum source-based duty cycle of 802.15.4 mode is permanently limited to 60%. SAR measurement for 802.15.4 is evaluated at a higher duty cycle of 100% and scaled down to 60%. See Section 8.17 for the time domain plot for the duty factor of the device at the maximum source-based duty cycle of 60% and at the test mode during SAR measurement of 100%.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 240 of 255

REV 25.0
10/16/2024

10.39 Power Density Data

MEASUREMENT RESULTS																								
Frequency (MHz)	Channel	Mode	Service	Bandwidth (MHz)	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Power Drift (dB)	Spacing (mm)	Antenna Config.	Variant	DUT Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Grid Step (A)	IPD (W/m²)	Scaling Factor for Measurement Uncertainty per IEC 62479	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Normal psPD (W/m²)	Scaled Normal psPD (W/m²)	Total psPD (W/m²)	Scaled Total psPD (W/m²)	Plot #
6025	15	802.11a	OFDM	160	11.50	11.20	0.11	2	3b	V1	HXM56	68.1	Back	97.74	0.041	1.510	1.554	1.072	1.023	3.380	5.760	3.770	6.425	
6345	79	802.11a	OFDM	160	14.00	12.68	0.07	2	3b	V1	HXM56	68.1	Back	97.74	0.041	1.250	1.554	1.355	1.023	2.730	5.881	3.280	7.065	
6505	111	802.11a	OFDM	160	12.50	11.37	0.03	2	3b	V1	HXM56	68.1	Back	97.74	0.041	0.936	1.554	1.297	1.023	2.230	4.598	2.620	5.402	
6665	143	802.11a	OFDM	160	14.75	13.60	0.06	2	3b	V1	HXM56	68.1	Back	97.74	0.041	1.400	1.554	1.303	1.023	2.970	6.152	3.420	7.084	
6985	207	802.11a	OFDM	160	12.00	11.16	0.03	2	3b	V1	HXM56	68.1	Back	97.74	0.041	0.936	1.554	1.213	1.023	2.230	4.300	2.620	5.052	
6025	15	802.11a	OFDM	160	11.50	11.20	0.08	2	3b	V1	HXM56	68.1	Top	97.74	0.041	1.490	1.554	1.072	1.023	3.560	6.067	4.150	7.072	
6345	79	802.11a	OFDM	160	14.00	12.68	-0.17	2	3b	V1	HXM56	68.1	Top	97.74	0.041	0.970	1.554	1.355	1.023	1.800	3.877	2.430	5.234	
6505	111	802.11a	OFDM	160	12.50	11.37	0.02	2	3b	V1	HXM56	68.1	Top	97.74	0.041	1.180	1.554	1.297	1.023	2.100	4.330	2.400	4.949	
6665	143	802.11a	OFDM	160	14.75	13.60	0.00	2	3b	V1	HXM56	68.1	Top	97.74	0.041	1.320	1.554	1.303	1.023	2.750	5.696	3.300	6.836	
6985	207	802.11a	OFDM	160	12.00	11.16	-0.04	2	3b	V1	HXM56	68.1	Top	97.74	0.041	0.732	1.554	1.213	1.023	0.939	1.811	1.490	2.873	
6665	143	802.11a	OFDM	160	14.75	13.60	0.07	2	3b	V1	HXM56	68.1	Bottom	97.74	0.25	0.367	1.554	1.303	1.023	0.113	0.234	0.128	0.265	
6665	143	802.11a	OFDM	160	14.75	13.60	0.07	2	3b	V1	HXM56	68.1	Left	97.74	0.25	0.891	1.554	1.303	1.023	0.279	0.578	0.325	0.673	
6665	143	802.11a	OFDM	160	14.75	13.60	0.05	2	3b	V1	HXM56	68.1	Right	97.74	0.25	5.720	1.554	1.303	1.023	0.784	1.624	0.808	1.674	
6665	143	802.11a	OFDM	160	14.75	13.60	-0.13	9	3b	V1	HXM56	68.1	Right	97.74	0.25	0.547	1.554	1.303	1.023	0.088	0.182	0.121	0.251	
6665	143	802.11a	OFDM	160	14.75	13.60	0.03	9	3b	V1	HXM56	68.1	Back	97.74	0.041	1.230	1.554	1.303	1.023	1.750	3.625	1.860	3.853	
6025	15	802.11a	OFDM	160	12.75	12.55	0.03	2	5T	V2	YRWWV	68.1	Back	97.74	0.25	2.110	1.554	1.047	1.023	0.783	1.303	0.868	1.445	
6025	15	802.11a	OFDM	160	12.75	12.55	-0.04	2	5T	V2	YRWWV	68.1	Top	97.74	0.25	1.850	1.554	1.047	1.023	0.287	0.478	0.319	0.531	
6025	15	802.11a	OFDM	160	12.75	12.55	-0.04	2	5T	V2	YRWWV	68.1	Bottom	97.74	0.25	1.030	1.554	1.047	1.023	0.203	0.338	0.212	0.353	
6025	15	802.11a	OFDM	160	12.75	12.55	-0.09	2	5T	V2	YRWWV	68.1	Left	97.74	0.25	0.585	1.554	1.047	1.023	0.124	0.206	0.199	0.331	
6025	15	802.11a	OFDM	160	12.75	12.55	-0.04	2	5T	V2	YRWWV	68.1	Right	97.74	0.041	1.390	1.554	1.047	1.023	3.500	5.826	4.260	7.091	
6345	79	802.11a	OFDM	160	12.50	11.77	-0.18	2	5T	V2	YRWWV	68.1	Right	97.74	0.041	1.610	1.554	1.183	1.023	3.130	5.886	3.770	7.090	
6505	111	802.11a	OFDM	160	12.50	11.97	0.03	2	5T	V2	YRWWV	68.1	Right	97.74	0.041	1.770	1.554	1.130	1.023	3.310	5.946	3.940	7.078	
6665	143	802.11a	OFDM	160	12.25	11.68	0.18	2	5T	V2	YRWWV	68.1	Right	97.74	0.041	1.800	1.554	1.140	1.023	3.540	6.416	3.910	7.086	
6985	207	802.11a	OFDM	160	12.00	11.86	0.04	2	5T	V2	YRWWV	68.1	Right	97.74	0.041	1.330	1.554	1.033	1.023	2.240	3.679	4.260	6.996	
6025	15	802.11a	OFDM	160	12.75	12.55	0.06	9.95	5T	V2	YRWWV	68.1	Back	97.74	0.25	1.070	1.554	1.047	1.023	0.350	0.583	0.364	0.606	
6025	15	802.11a	OFDM	160	12.75	12.55	-0.05	9.95	5T	V2	YRWWV	68.1	Right	97.74	0.041	1.170	1.554	1.047	1.023	1.280	2.131	1.460	2.430	
6985	143	802.11a	OFDM	160	11.25	10.35	0.00	2	1b	V1	27WT9	68.1	Back	97.74	0.041	3.980	1.554	1.230	1.023	2.770	5.416	2.810	5.495	
6985	143	802.11a	OFDM	160	11.25	10.35	-0.09	2	1b	V1	27WT9	68.1	Top	97.74	0.041	1.030	1.554	1.230	1.023	0.127	0.248	0.128	0.250	
6025	15	802.11a	OFDM	160	10.00	9.83	-0.06	2	1b	V1	27WT9	68.1	Bottom	97.74	0.041	1.470	1.554	1.040	1.023	3.680	6.084	4.280	7.076	A37
6345	79	802.11a	OFDM	160	10.75	10.42	0.02	2	1b	V1	27WT9	68.1	Bottom	97.74	0.041	1.120	1.554	1.079	1.023	3.470	5.952	4.130	7.084	
6505	111	802.11a	OFDM	160	10.75	10.68	-0.05	2	1b	V1	27WT9	68.1	Bottom	97.74	0.041	1.190	1.554	1.016	1.023	2.830	4.571	3.940	6.364	
6665	143	802.11a	OFDM	160	11.25	10.35	0.00	2	1b	V1	27WT9	68.1	Bottom	97.74	0.041	1.320	1.554	1.230	1.023	2.900	5.671	3.620	7.078	
6985	207	802.11a	OFDM	160	10.25	10.06	-0.18	2	1b	V1	27WT9	68.1	Bottom	97.74	0.041	1.050	1.554	1.045	1.023	1.600	2.658	1.950	3.239	
6985	143	802.11a	OFDM	160	11.25	10.35	-0.11	2	1b	V1	27WT9	68.1	Left	97.74	0.041	0.302	1.554	1.230	1.023	0.058	0.113	0.099	0.194	
6985	143	802.11a	OFDM	160	11.25	10.35	-0.08	2	1b	V1	27WT9	68.1	Right	97.74	0.25	0.249	1.554	1.230	1.023	0.084	0.164	0.087	0.170	
6985	143	802.11a	OFDM	160	11.25	10.35	-0.11	9	1b	V1	27WT9	68.1	Back	97.74	0.25	1.920	1.554	1.230	1.023	0.590	1.154	0.645	1.261	
6345	79	802.11a	OFDM	160	10.75	10.42	-0.05	9.45	1b	V1	27WT9	68.1	Bottom	97.74	0.041	0.425	1.554	1.079	1.023	0.562	0.964	0.712	1.221	
47 CFR §1.1310 - SAFETY LIMIT Spatial Average Uncontrolled Exposure / General Population												Power Density 10 W/m² averaged over 4 cm²												

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 241 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

10.40 Power Density Notes

1. The manufacturer has confirmed that the devices tested have the same physical, mechanical, and thermal characteristics and are within operational tolerances expected for production units.
2. Batteries are fully charged at the beginning of the measurements. The DUT was connected to a wall charger for some measurements due to the test duration. It was confirmed that the charger plugged into this DUT did not impact the near-field PD test results.
3. Power density was calculated by repeated E-field measurements on two measurement planes separated by $\lambda/4$.
4. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools.
5. Per FCC guidance and equipment manufacturer guidance, power density results were scaled according to IEC 62479:2010 for the portion of the measurement uncertainty > 30%. Total expanded uncertainty of 2.68 dB (85.4%) was used to determine the psPD measurement scaling factor.
6. Per equipment manufacturer guidance, power density was measured at $d=2\text{mm}$ and $d=\lambda/5\text{mm}$ using the same grid size and grid step size for some frequencies and surfaces. The integrated Power Density (iPD) was calculated based on these measurements. Since iPD ratio between the two distances is $\geq -1\text{dB}$, the grid step was sufficient for determining compliance at $d=2\text{mm}$.
7. PD results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D04v01.
8. PTP-PR algorithm was used during psPD measurement and calculations.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 242 of 255

REV 25.0
10/16/2024

11 SAR MEASUREMENT VARIABILITY

11.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
- 4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg.
- 5) When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

Table 11-1
Body SAR Measurement Variability Results

BODY VARIABILITY RESULTS											
Band	FREQUENCY		Mode	Service	Ant	Data Rate (Mbps)	Side	Spacing	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio
	MHz	Ch.							(W/kg)	(W/kg)	
750	680.5	133297	LTE Band 71, 20 MHz Bandwidth	QPSK, 100 RB, 0 RB Offset	Ant 4	N/A	Back	0 mm	0.961	0.950	1.01
835	819.00	26740	LTE Band 26, 10 MHz Bandwidth	QPSK, 1 RB, 0 RB Offset	Ant 2	N/A	Back	0 mm	0.913	0.895	1.02
1750	1745.00	349000	NR Band n66, 40 MHz Bandwidth	CP-OFDM, QPSK, 1 RB, 1 RB Offset	Ant 2	N/A	Back	0 mm	0.950	0.929	1.02
1900	1907.60	9538	UMTS 1900	RMC	Ant 1b	N/A	Back	0 mm	0.946	0.942	1.00
2300	2310.00	27710	LTE Band 30, 10 MHz Bandwidth	QPSK, 1 RB, 49 RB Offset	Ant 1b	N/A	Back	0 mm	0.879	0.863	1.02
2450	2440	18	802.15.4	CW	Ant 3a	N/A	Right	0 mm	1.420	1.410	1.01
2600	2592.99	518598	NR Band n41, 100 MHz Bandwidth	CP-OFDM, QPSK, 1 RB, 1 RB Offset	Ant 2	N/A	Back	0 mm	0.855	0.845	1.01
3900	3930.00	662000	NR Band n77, 100 MHz Bandwidth	DFT-s-OFDM, QPSK, 1 RB, 137 RB Offset	Ant 4	N/A	Left	0 mm	0.808	0.770	1.05
5250	5245	High	NB U-NII 1	FHSS	Ant 3b	4	Top	0 mm	0.931	0.873	1.07
5600	5610	122	5 GHz WiFi/IEEE 802.11ac, 80 MHz Bandwidth	OFDM	Ant 5T	29.3	Right	0 mm	0.879	0.839	1.05
5750	5789	Mid	NB U-NII 3	FHSS	Ant 1b	1	Back	0 mm	1.060	1.060	1.00
5850	5844	High	NB U-NII 3	FHSS	Ant 1b	1	Back	0 mm	0.903	0.850	1.06
6500	6505.00	111	6 GHz WiFi/ IEEE 802.11ax, 160 MHz Bandwidth	OFDM	Ant 1b	68.1	Bottom	0 mm	1.040	0.999	1.04
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram		

11.2 Measurement Uncertainty

The measured SAR was < 1.5 W/kg for 1g and < 3.75 W/kg for 10g for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2013 was not required.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 243 of 255

REV 25.0
10/16/2024

12 ADDITIONAL TESTING PER FCC GUIDANCE


12.1 LTE Band 41 Power Class 2 and Power Class 3 Linearity

This device supports Power Class 2 and Power Class 3 operations for LTE Band 41. The highest available duty cycle for Power Class 2 operations is 43.3 % using UL-DL configuration 1. Per May 2017 TCB Workshop Notes based on the device behavior, all SAR tests were performed using Power Class 3. SAR with Power Class 2 at the highest power and available duty factor was additionally performed for the Power Class 3 configuration with the highest SAR for each exposure condition. The linearity between the Power Class 2 and Power Class 3 SAR results and the respective frame averaged powers was calculated to determine that the results were linear. When ULCA is active, the linearity between the Power Class 2 with ULCA active and Power Class 3 with ULCA active SAR results and the respective frame averaged powers was calculated to determine that the results were linear. Per May 2017 TCB Workshop, no additional SAR measurements were required since the linearity between power classes was < 10% and all reported SAR values were < 1.4 W/kg for 1g and < 3.5 W/kg for 10g.

Table 12-1
LTE Band 41 Body Linearity Data – Antenna 1b

	LTE Band 41 PC3	LTE Band 41 PC2
Maximum Allowed Output Power (dBm)	14.3	15.9
Measured Output Power (dBm)	12.73	14.89
Measured SAR (W/kg)	0.690	0.700
Measured Power (mW)	18.75	30.83
Duty Cycle	63.3%	43.3%
Frame Averaged Output Power (mW)	11.87	13.35
% deviation from expected linearity		-9.81%

Figure 12-1
LTE Band 41 Body Linearity – Antenna 1b

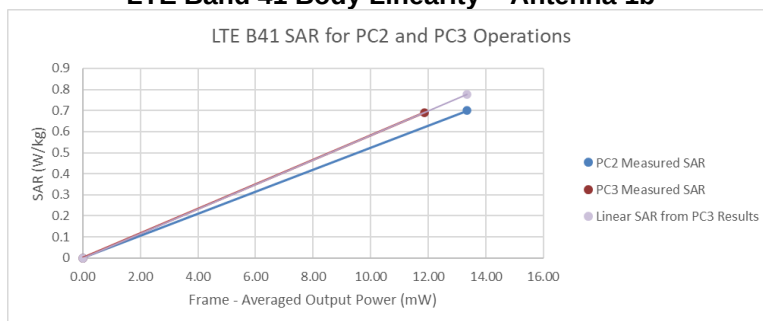


FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 244 of 255

REV 25.0
10/16/2024

Table 12-2
LTE Band 41 ULCA Body Linearity Data – Antenna 1b

	LTE Band 41 PC3	LTE Band 41 PC2
Maximum Allowed Output Power (dBm)	14.3	15.9
Measured Output Power (dBm)	13.30	15.06
Measured SAR (W/kg)	0.759	0.708
Measured Power (mW)	21.38	32.06
Duty Cycle	63.3%	43.3%
Frame Averaged Output Power (mW)	13.53	13.88
% deviation from expected linearity		-9.07%

Figure 12-2
LTE Band 41 ULCA Body Linearity – Antenna 1b

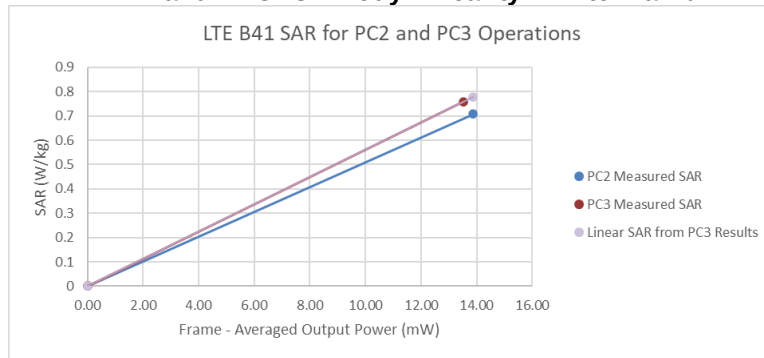

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 245 of 255

REV 25.0
10/16/2024

Table 12-3
LTE Band 41 Body Linearity Data – Antenna 2

	LTE Band 41 PC3	LTE Band 41 PC2
Maximum Allowed Output Power (dBm)	15.1	16.7
Measured Output Power (dBm)	14.41	15.93
Measured SAR (W/kg)	0.827	0.792
Measured Power (mW)	27.61	39.17
Duty Cycle	63.3%	43.3%
Frame Averaged Output Power (mW)	17.47	16.96
% deviation from expected linearity		-1.34%

Figure 12-3
LTE Band 41 Body Linearity – Antenna 2


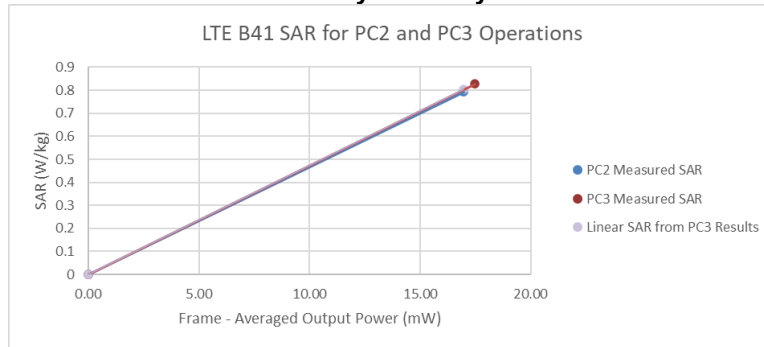


Table 12-4
LTE Band 41 ULCA Body Linearity Data – Antenna 2

	LTE Band 41 PC3	LTE Band 41 PC2
Maximum Allowed Output Power (dBm)	15.1	16.7
Measured Output Power (dBm)	14.66	16.07
Measured SAR (W/kg)	0.875	0.840
Measured Power (mW)	29.24	40.46
Duty Cycle	63.3%	43.3%
Frame Averaged Output Power (mW)	18.51	17.52
% deviation from expected linearity		1.43%

Figure 12-4
LTE Band 41 ULCA Body Linearity – Antenna 2

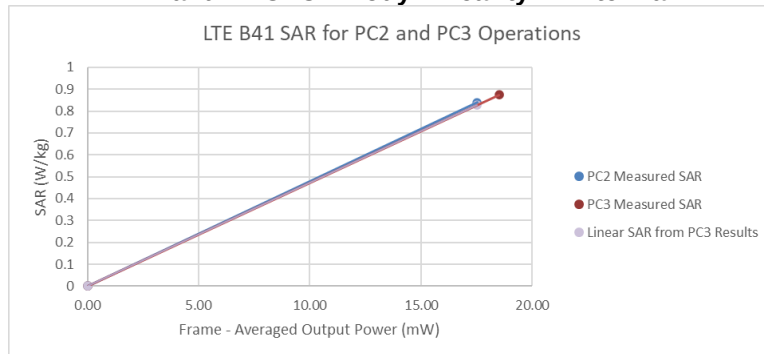

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 246 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 12-5
LTE Band 41 Body Linearity Data – Antenna 3b

	LTE Band 41 PC3	LTE Band 41 PC2
Maximum Allowed Output Power (dBm)	14.9	16.5
Measured Output Power (dBm)	14.12	15.81
Measured SAR (W/kg)	0.816	0.806
Measured Power (mW)	25.82	38.11
Duty Cycle	63.3%	43.3%
Frame Averaged Output Power (mW)	16.35	16.50
% deviation from expected linearity		-2.15%

Figure 12-5
LTE Band 41 Body Linearity – Antenna 3b


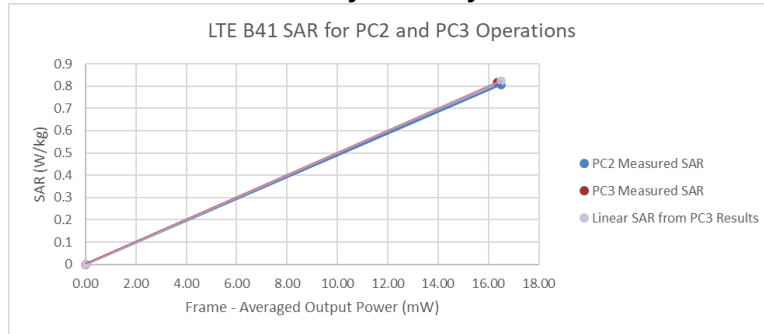


Table 12-6
LTE Band 41 ULCA Body Linearity Data – Antenna 3b

	LTE Band 41 PC3	LTE Band 41 PC2
Maximum Allowed Output Power (dBm)	14.9	16.5
Measured Output Power (dBm)	14.03	15.88
Measured SAR (W/kg)	0.788	0.803
Measured Power (mW)	25.29	38.73
Duty Cycle	63.3%	43.3%
Frame Averaged Output Power (mW)	16.01	16.77
% deviation from expected linearity		-2.70%

Figure 12-6
LTE Band 41 ULCA Body Linearity – Antenna 3b

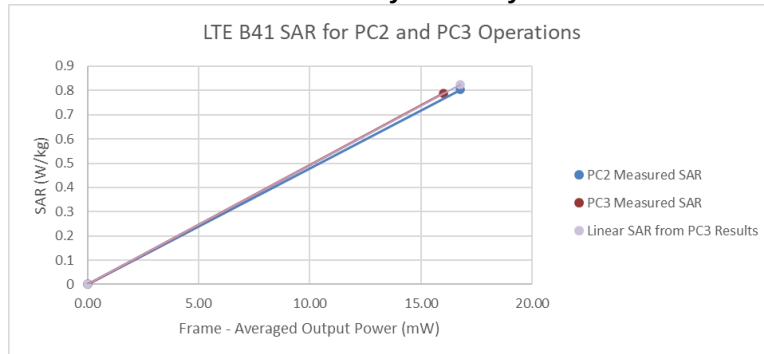

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 247 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 12-7
LTE Band 41 Body Linearity Data – Antenna 4

	LTE Band 41 PC3	LTE Band 41 PC2
Maximum Allowed Output Power (dBm)	13.2	14.8
Measured Output Power (dBm)	12.55	14.22
Measured SAR (W/kg)	0.795	0.741
Measured Power (mW)	17.99	26.42
Duty Cycle	63.3%	43.3%
Frame Averaged Output Power (mW)	11.39	11.44
% deviation from expected linearity		-7.24%

Figure 12-7
LTE Band 41 Body Linearity – Antenna 4


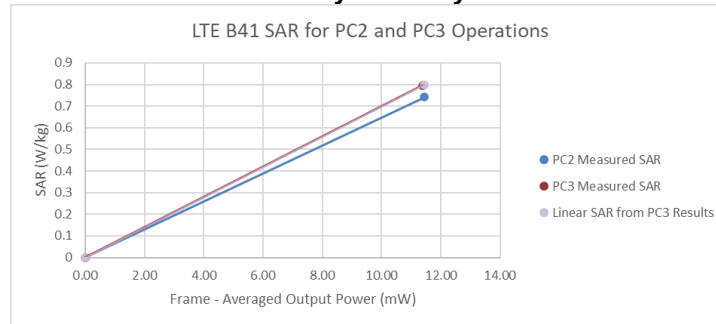


Table 12-8
LTE Band 41 ULCA Body Linearity Data – Antenna 4

	LTE Band 41 PC3	LTE Band 41 PC2
Maximum Allowed Output Power (dBm)	13.2	14.8
Measured Output Power (dBm)	12.43	14.19
Measured SAR (W/kg)	0.756	0.757
Measured Power (mW)	17.50	26.24
Duty Cycle	63.3%	43.3%
Frame Averaged Output Power (mW)	11.08	11.36
% deviation from expected linearity		-2.39%

Figure 12-8
LTE Band 41 ULCA Body Linearity – Antenna 4

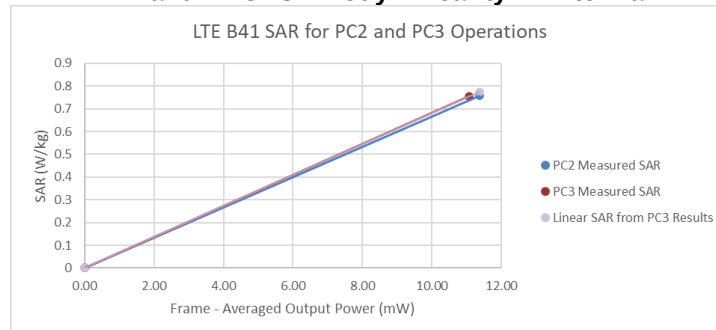

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 248 of 255

REV 25.0
10/16/2024

13 EQUIPMENT LIST

Note: CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

Part Number	Description	Call Price		Call Price		Serial Number
		Qty	Unit	Qty	Unit	
Agilent	EN4006	1	N/A	N/A	N/A	M94121382
Agilent	EN4047	1	N/A	1	Unit	0000000000
Agilent	EN4048	1	N/A	1	Unit	M94120000
Agilent	EN4049	1	N/A	1	Unit	M94120000
Agilent	EN4050	1	N/A	1	Unit	M94120000
Agilent	EN4051	1	N/A	1	Unit	M94120000
Agilent	EN4052	1	N/A	1	Unit	M94120000
Agilent	EN4053	1	N/A	1	Unit	M94120000
Agilent	EN4054	1	N/A	1	Unit	M94120000
Agilent	EN4055	1	N/A	1	Unit	M94120000
Agilent	EN4056	1	N/A	1	Unit	M94120000
Agilent	EN4057	1	N/A	1	Unit	M94120000
Agilent	EN4058	1	N/A	1	Unit	M94120000
Agilent	EN4059	1	N/A	1	Unit	M94120000
Agilent	EN4060	1	N/A	1	Unit	M94120000
Agilent	EN4061	1	N/A	1	Unit	M94120000
Agilent	EN4062	1	N/A	1	Unit	M94120000
Agilent	EN4063	1	N/A	1	Unit	M94120000
Agilent	EN4064	1	N/A	1	Unit	M94120000
Agilent	EN4065	1	N/A	1	Unit	M94120000
Agilent	EN4066	1	N/A	1	Unit	M94120000
Agilent	EN4067	1	N/A	1	Unit	M94120000
Agilent	EN4068	1	N/A	1	Unit	M94120000
Agilent	EN4069	1	N/A	1	Unit	M94120000
Agilent	EN4070	1	N/A	1	Unit	M94120000
Agilent	EN4071	1	N/A	1	Unit	M94120000
Agilent	EN4072	1	N/A	1	Unit	M94120000
Agilent	EN4073	1	N/A	1	Unit	M94120000
Agilent	EN4074	1	N/A	1	Unit	M94120000
Agilent	EN4075	1	N/A	1	Unit	M94120000
Agilent	EN4076	1	N/A	1	Unit	M94120000
Agilent	EN4077	1	N/A	1	Unit	M94120000
Agilent	EN4078	1	N/A	1	Unit	M94120000
Agilent	EN4079	1	N/A	1	Unit	M94120000
Agilent	EN4080	1	N/A	1	Unit	M94120000
Agilent	EN4081	1	N/A	1	Unit	M94120000
Agilent	EN4082	1	N/A	1	Unit	M94120000
Agilent	EN4083	1	N/A	1	Unit	M94120000
Agilent	EN4084	1	N/A	1	Unit	M94120000
Agilent	EN4085	1	N/A	1	Unit	M94120000
Agilent	EN4086	1	N/A	1	Unit	M94120000
Agilent	EN4087	1	N/A	1	Unit	M94120000
Agilent	EN4088	1	N/A	1	Unit	M94120000
Agilent	EN4089	1	N/A	1	Unit	M94120000
Agilent	EN4090	1	N/A	1	Unit	M94120000
Agilent	EN4091	1	N/A	1	Unit	M94120000
Agilent	EN4092	1	N/A	1	Unit	M94120000
Agilent	EN4093	1	N/A	1	Unit	M94120000
Agilent	EN4094	1	N/A	1	Unit	M94120000
Agilent	EN4095	1	N/A	1	Unit	M94120000
Agilent	EN4096	1	N/A	1	Unit	M94120000
Agilent	EN4097	1	N/A	1	Unit	M94120000
Agilent	EN4098	1	N/A	1	Unit	M94120000
Agilent	EN4099	1	N/A	1	Unit	M94120000
Agilent	EN4100	1	N/A	1	Unit	M94120000
Agilent	EN4101	1	N/A	1	Unit	M94120000
Agilent	EN4102	1	N/A	1	Unit	M94120000
Agilent	EN4103	1	N/A	1	Unit	M94120000
Agilent	EN4104	1	N/A	1	Unit	M94120000
Agilent	EN4105	1	N/A	1	Unit	M94120000
Agilent	EN4106	1	N/A	1	Unit	M94120000
Agilent	EN4107	1	N/A	1	Unit	M94120000
Agilent	EN4108	1	N/A	1	Unit	M94120000
Agilent	EN4109	1	N/A	1	Unit	M94120000
Agilent	EN4110	1	N/A	1	Unit	M94120000
Agilent	EN4111	1	N/A	1	Unit	M94120000
Agilent	EN4112	1	N/A	1	Unit	M94120000
Agilent	EN4113	1	N/A	1	Unit	M94120

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 249 of 255

14 MEASUREMENT UNCERTAINTIES

Applicable for SAR measurements < 6 GHz:

a	b	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	IEEE 1528 Sec.	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System									
Probe Calibration	E2.1	7	N	1	1	1	7.0	7.0	∞
Axial Isotropy	E2.2	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	E2.2	1.3	N	1	0.7	0.7	0.9	0.9	∞
Boundary Effect	E2.3	2	R	1.732	1	1	1.2	1.2	∞
Linearity	E2.4	0.3	N	1	1	1	0.3	0.3	∞
System Detection Limits	E2.4	0.25	R	1.732	1	1	0.1	0.1	∞
Modulation Response	E2.5	4.8	R	1.732	1	1	2.8	2.8	∞
Readout Electronics	E2.6	0.3	N	1	1	1	0.3	0.3	∞
Response Time	E2.7	0.8	R	1.732	1	1	0.5	0.5	∞
Integration Time	E2.8	2.6	R	1.732	1	1	1.5	1.5	∞
RF Ambient Conditions - Noise	E6.1	3	R	1.732	1	1	1.7	1.7	∞
RF Ambient Conditions - Reflections	E6.1	3	R	1.732	1	1	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E6.2	0.8	R	1.732	1	1	0.5	0.5	∞
Probe Positioning w/ respect to Phantom	E6.3	6.7	R	1.732	1	1	3.9	3.9	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	E5	4	R	1.732	1	1	2.3	2.3	∞
Test Sample Related									
Test Sample Positioning	E4.2	3.12	N	1	1	1	3.1	3.1	35
Device Holder Uncertainty	E4.1	1.67	N	1	1	1	1.7	1.7	5
Output Power Variation - SAR drift measurement	E2.9	5	R	1.732	1	1	2.9	2.9	∞
SAR Scaling	E6.5	0	R	1.732	1	1	0.0	0.0	∞
Phantom & Tissue Parameters									
Phantom Uncertainty (Shape & Thickness tolerances)	E3.1	7.6	R	1.73	1.0	1.0	4.4	4.4	∞
Liquid Conductivity - measurement uncertainty	E3.3	4.3	N	1	0.78	0.71	3.3	3.0	76
Liquid Permittivity - measurement uncertainty	E3.3	4.2	N	1	0.23	0.26	1.0	1.1	75
Liquid Conductivity - Temperature Uncertainty	E3.4	3.4	R	1.732	0.78	0.71	1.5	1.4	∞
Liquid Permittivity - Temperature Uncertainty	E3.4	0.6	R	1.732	0.23	0.26	0.1	0.1	∞
Liquid Conductivity - deviation from target values	E3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Permittivity - deviation from target values	E3.2	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Combined Standard Uncertainty (k=1)							RSS	12.2	12.0
Expanded Uncertainty (95% CONFIDENCE LEVEL)							k=2	24.4	24.0

The above measurement uncertainties are according to IEEE Std. 1528-2013

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 250 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Applicable for SAR measurements > 6 GHz:

a	b	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	IEEE 1528 Sec.	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System									
Probe Calibration	E2.1	9.3	N	1	1	1	9.3	9.3	∞
Axial Isotropy	E2.2	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	E2.2	1.3	N	1	0.7	0.7	0.9	0.9	∞
Boundary Effect	E2.3	2	R	1.732	1	1	1.2	1.2	∞
Linearity	E2.4	0.3	N	1	1	1	0.3	0.3	∞
System Detection Limits	E2.4	0.25	R	1.732	1	1	0.1	0.1	∞
Modulation Response	E2.5	4.8	R	1.732	1	1	2.8	2.8	∞
Readout Electronics	E2.6	0.3	N	1	1	1	0.3	0.3	∞
Response Time	E2.7	0.8	R	1.732	1	1	0.5	0.5	∞
Integration Time	E2.8	2.6	R	1.732	1	1	1.5	1.5	∞
RF Ambient Conditions - Noise	E6.1	3	R	1.732	1	1	1.7	1.7	∞
RF Ambient Conditions - Reflections	E6.1	3	R	1.732	1	1	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E6.2	0.8	R	1.732	1	1	0.5	0.5	∞
Probe Positioning w/ respect to Phantom	E6.3	6.7	R	1.732	1	1	3.9	3.9	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	E5	4	R	1.732	1	1	2.3	2.3	∞
Test Sample Related									
Test Sample Positioning	E4.2	3.12	N	1	1	1	3.1	3.1	35
Device Holder Uncertainty	E4.1	1.67	N	1	1	1	1.7	1.7	5
Output Power Variation - SAR drift measurement	E2.9	5	R	1.732	1	1	2.9	2.9	∞
SAR Scaling	E6.5	0	R	1.732	1	1	0.0	0.0	∞
Phantom & Tissue Parameters									
Phantom Uncertainty (Shape & Thickness tolerances)	E3.1	7.6	R	1.73	1.0	1.0	4.4	4.4	∞
Liquid Conductivity - measurement uncertainty	E3.3	4.3	N	1	0.78	0.71	3.3	3.0	76
Liquid Permittivity - measurement uncertainty	E3.3	4.2	N	1	0.23	0.26	1.0	1.1	75
Liquid Conductivity - Temperature Uncertainty	E3.4	3.4	R	1.732	0.78	0.71	1.5	1.4	∞
Liquid Permittivity - Temperature Uncertainty	E3.4	0.6	R	1.732	0.23	0.26	0.1	0.1	∞
Liquid Conductivity - deviation from target values	E3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Permittivity - deviation from target values	E3.2	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Combined Standard Uncertainty (k=1)							RSS	13.8	13.6
Expanded Uncertainty (95% CONFIDENCE LEVEL)							k=2	27.6	27.1

The above measurement uncertainties are according to IEEE Std. 1528-2013

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 251 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Applicable for Power Density measurements:

a	b	c	d	e	f = c x f/e	g
Uncertainty Component	Unc. (± dB)	Prob. Dist.	Div.	c _i	u _i (± dB)	v _i
Measurement System						
Calibration	0.49	N	1	1	0.49	∞
Probe Correction	0.00	R	1.73	1	0.00	∞
Frequency Response	0.20	R	1.73	1	0.12	∞
Sensor Cross Coupling	0.00	R	1.73	1	0.00	∞
Isotropy	0.50	R	1.73	1	0.29	∞
Linearity	0.20	R	1.73	1	0.12	∞
Probe Scattering	0.00	R	1.73	1	0.00	∞
Probe Positioning offset	0.30	R	1.73	1	0.17	∞
Probe Positioning Repeatability	0.04	R	1.73	1	0.02	∞
Sensor Mechanical Offset	0.00	R	1.73	1	0.00	∞
Probe Spatial Resolution	0.00	R	1.73	1	0.00	∞
Field Impedance Dependence	0.00	R	1.73	1	0.00	∞
Amplitude and Phase Drift	0.00	R	1.73	1	0.00	∞
Amplitude and Phase Noise	0.04	R	1.73	1	0.02	∞
Measurement Area Truncation	0.00	R	1.73	1	0.00	∞
Data Acquisition	0.03	N	1	1	0.03	∞
Sampling	0.00	R	1.73	1	0.00	∞
Field Reconstruction	2.00	R	1.73	1	1.15	∞
Forward Transformation	0.00	R	1.73	1	0.00	∞
Power Density Scaling	0.00	R	1.73	1	0.00	∞
Spatial Averaging	0.10	R	1.73	1	0.06	∞
System Detection Limit	0.04	R	1.73	1	0.02	∞
Test Sample Related						
Probe Coupling with DUT	0.00	R	1.73	1	0.00	∞
Modulation Response	0.40	R	1.73	1	0.23	∞
Integration Time	0.00	R	1.73	1	0.00	∞
Response Time	0.00	R	1.73	1	0.00	∞
Device Holder Influence	0.10	R	1.73	1	0.06	∞
DUT alignment	0.00	R	1.73	1	0.00	∞
RF Ambient Conditions	0.04	R	1.73	1	0.02	∞
Ambient Reflections	0.04	R	1.73	1	0.02	∞
Immunity/Secondary Reception	0.00	R	1.73	1	0.00	∞
Drift of DUT	0.21	R	1.73	1	0.12	∞
Combined Standard Uncertainty (k=1)					RSS	1.34
Expanded Uncertainty (95% CONFIDENCE LEVEL)					k=2	2.68

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 252 of 255

REV 25.0
10/16/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

15 CONCLUSION

15.1 Measurement Conclusion

The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Innovation, Science, and Economic Development Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g., ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g., age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 253 of 255

REV 25.0
10/16/2024

16 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2013, IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 1 -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 254 of 255

REV 25.0
10/16/2024

- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 1: Devices used next to the ear (Frequency range of 300 MHz to 6 GHz), July 2016.
- [21] Innovation, Science, Economic Development Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 5, March 2015.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2015
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [24] SAR Measurement Guidance for IEEE 802.11 Transmitters, KDB Publication 248227 D01
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D03-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [30] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

FCC ID: BCGA3269	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 255 of 255

REV 25.0
10/16/2024