



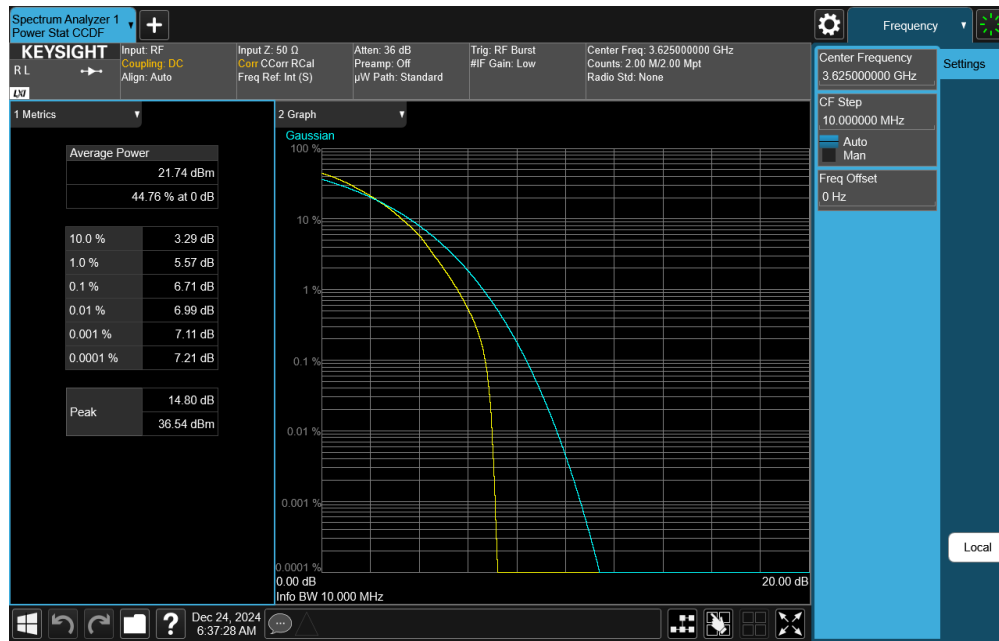

Plot 7-127. PAR Plot (LTE Band 48 - 10MHz 64-QAM – Full RB)


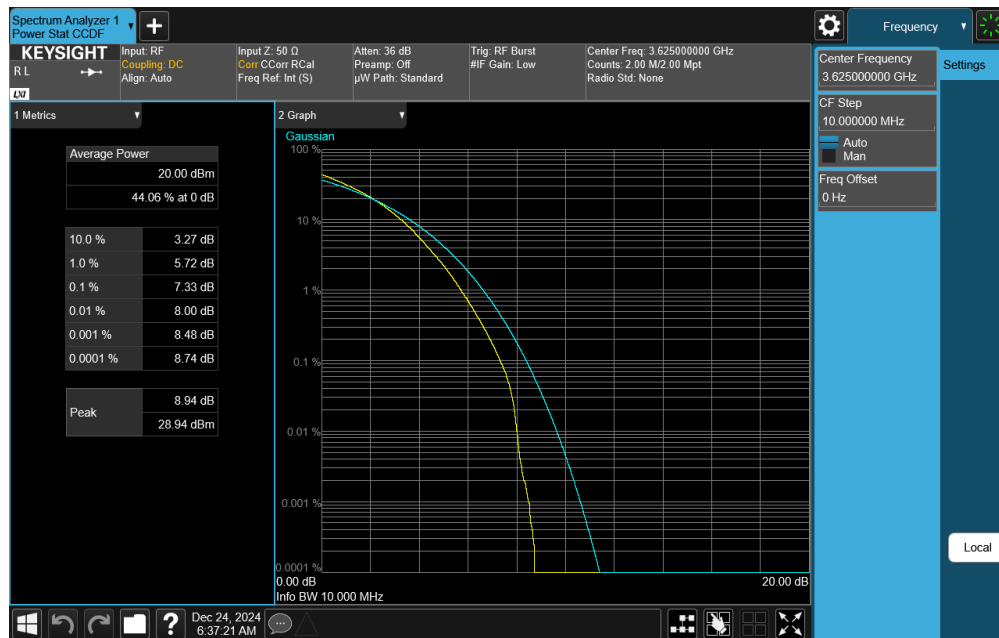


Plot 7-128. PAR Plot (LTE Band 48 - 10MHz 256-QAM – Full RB)

FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device
		Page 85 of 140

V2.2 09/07/2023


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

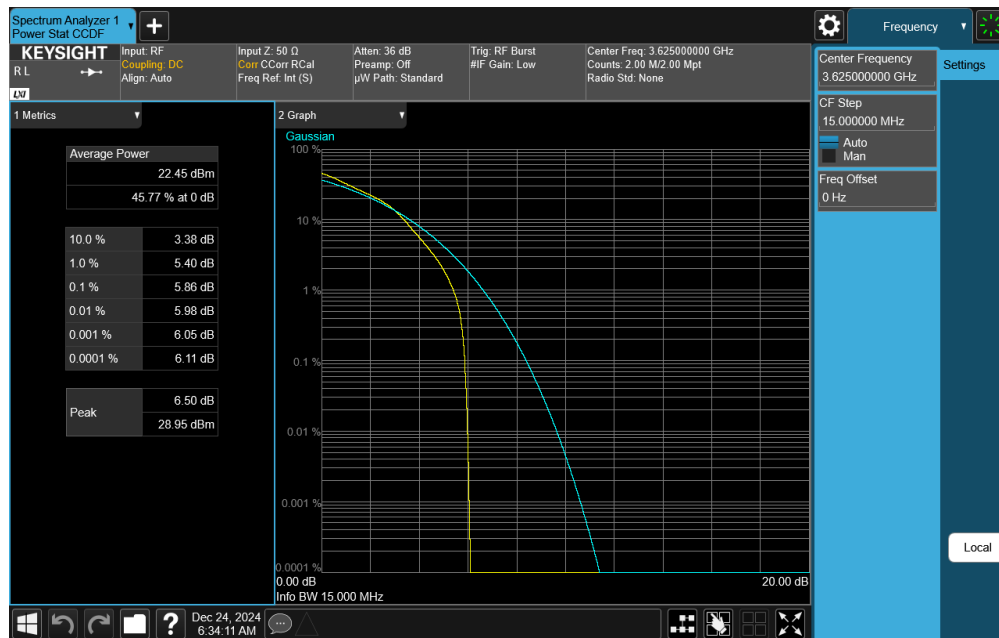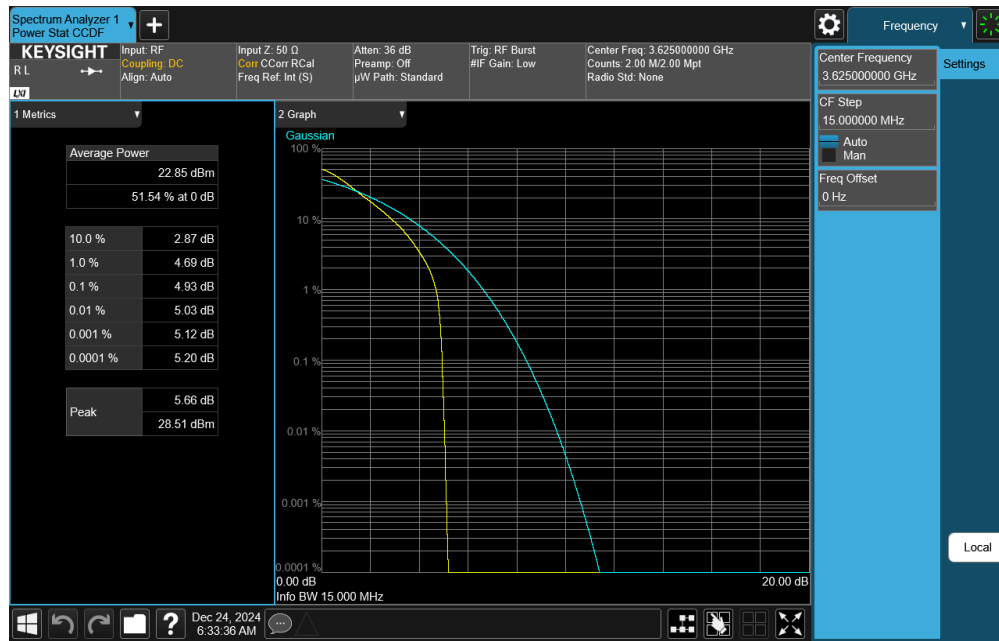


FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device
		Page 86 of 140

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

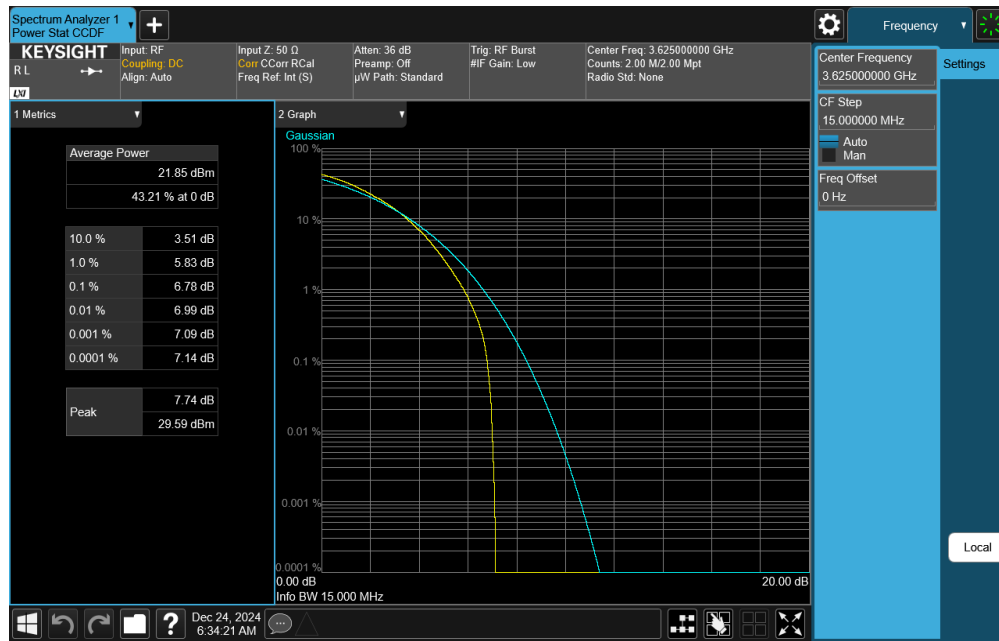

Plot 7-131. PAR Plot (LTE Band 48 - 15MHz 64-QAM – Full RB)

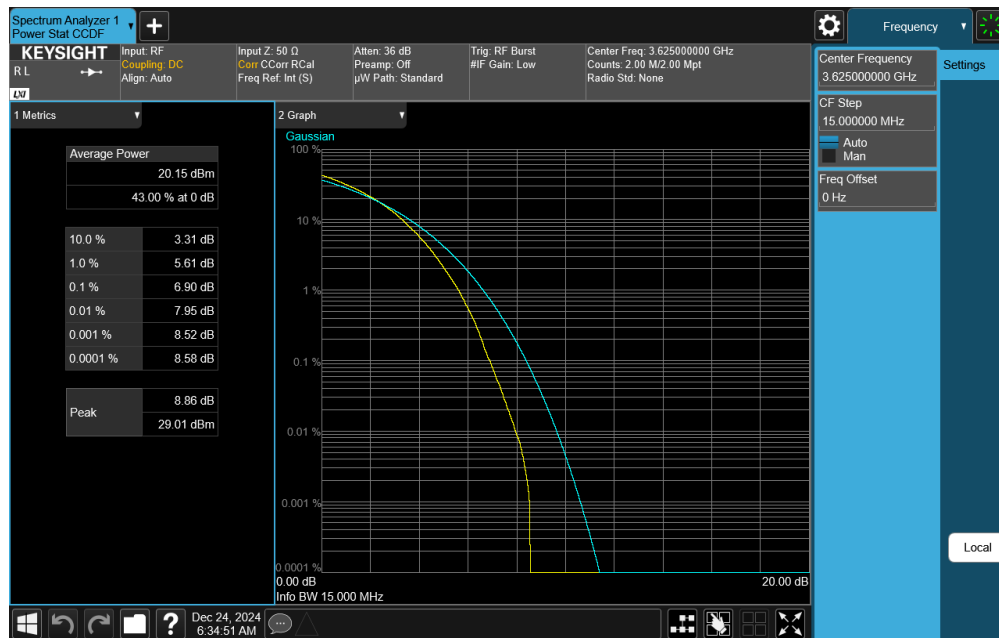


Plot 7-132. PAR Plot (LTE Band 48 - 15MHz 256-QAM – Full RB)


FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device
		Page 87 of 140

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

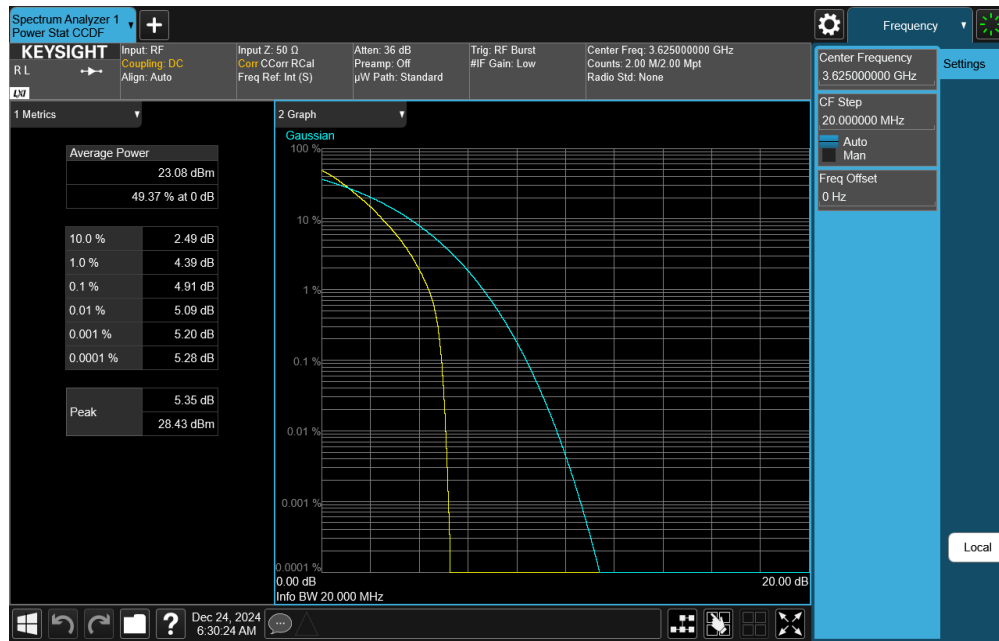

Plot 7-133. PAR Plot (LTE Band 48 - 20MHz QPSK – Full RB)

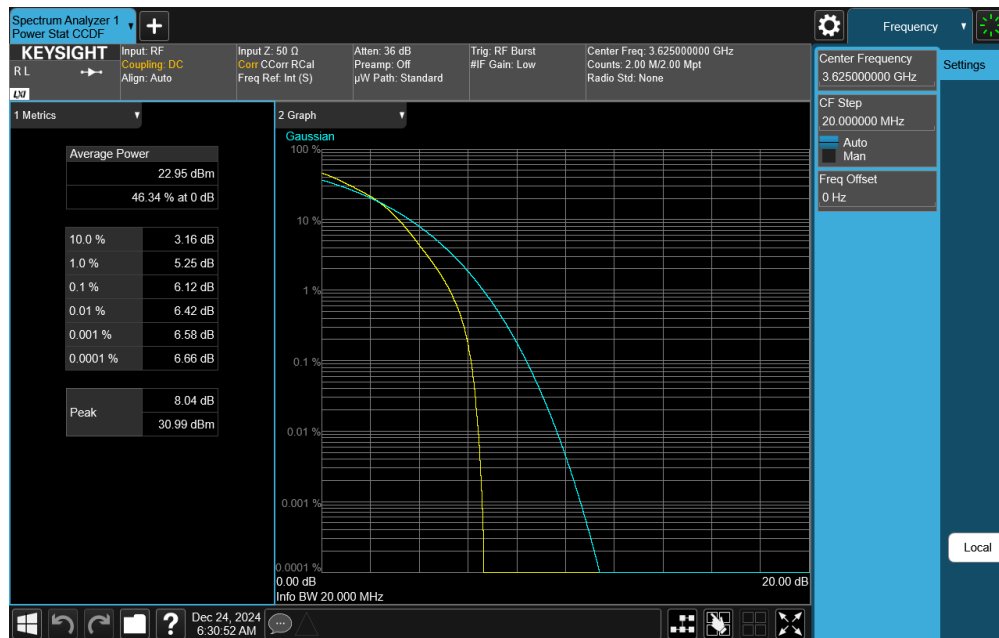


Plot 7-134. PAR Plot (LTE Band 48 - 20MHz 16-QAM – Full RB)


FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device
		Page 88 of 140

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

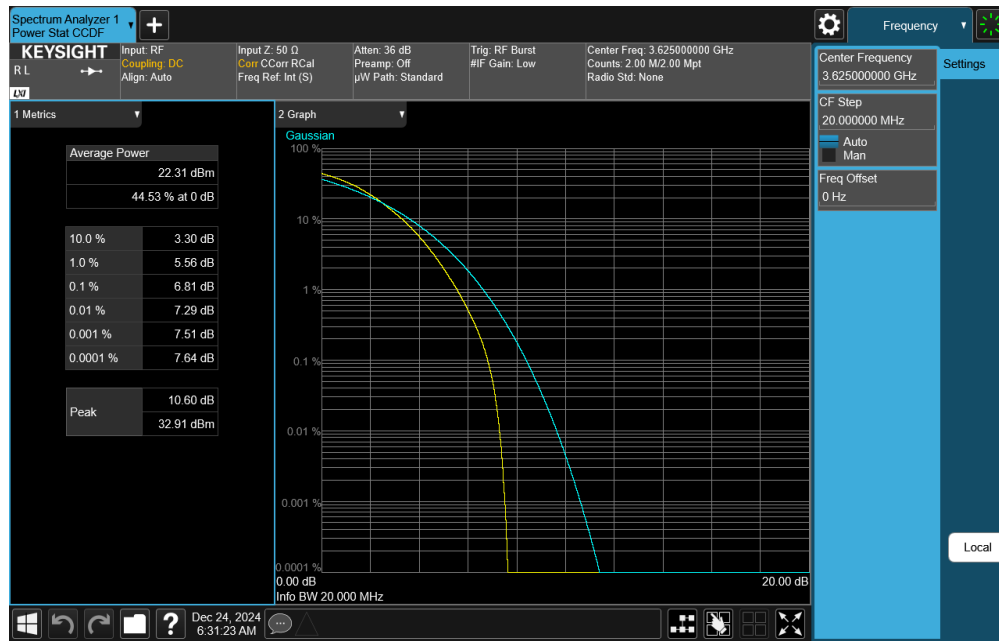

Plot 7-135. PAR Plot (LTE Band 48 - 20MHz 64-QAM – Full RB)

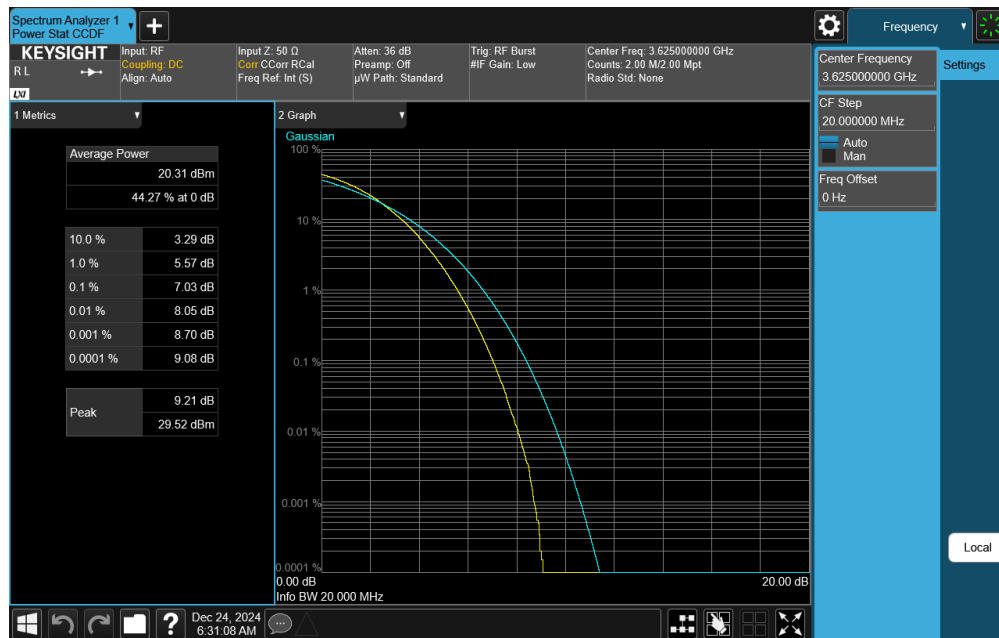


Plot 7-136. PAR Plot (LTE Band 48 - 20MHz 256-QAM – Full RB)

FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device
		Page 89 of 140


V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

NR Band n48

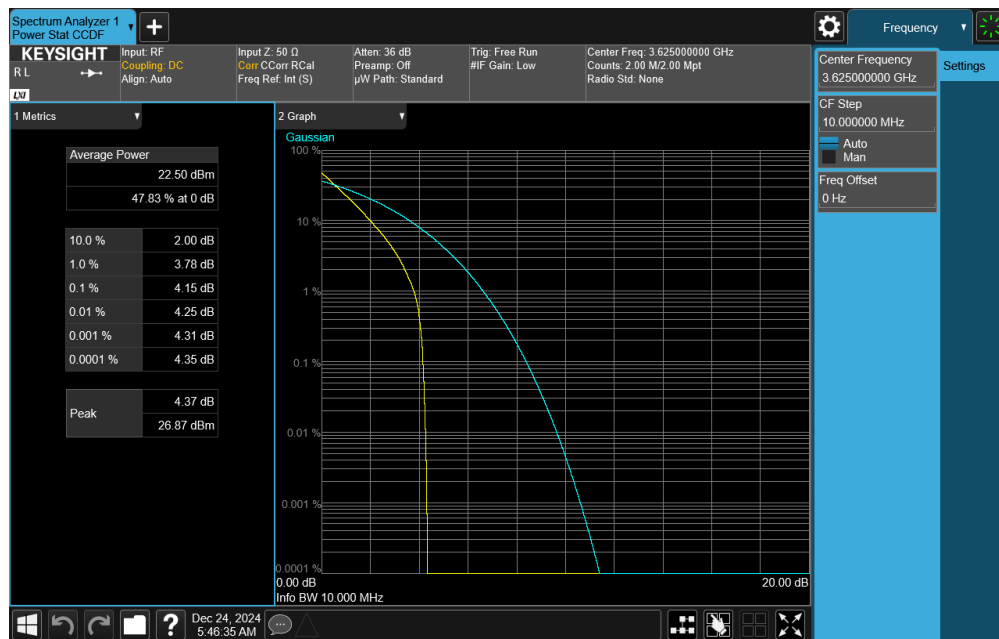

Plot 7-137. PAR Plot (NR Band n48 - 10MHz DFT-s-OFDM $\pi/2$ BPSK)

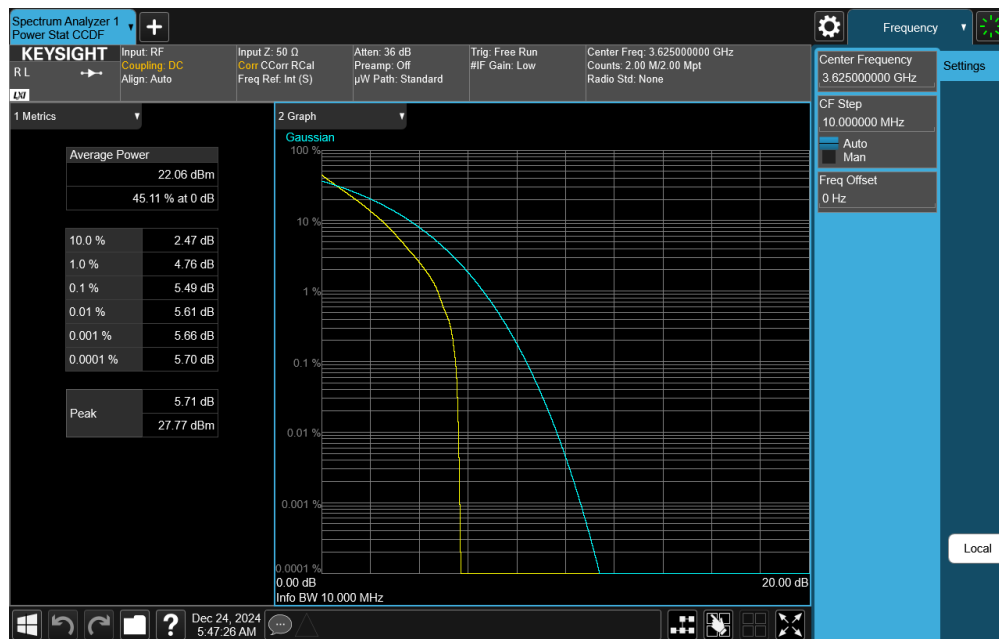


Plot 7-138. PAR Plot (NR Band n48 - 10MHz DFT-s-OFDM QPSK)


FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device
		Page 90 of 140

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

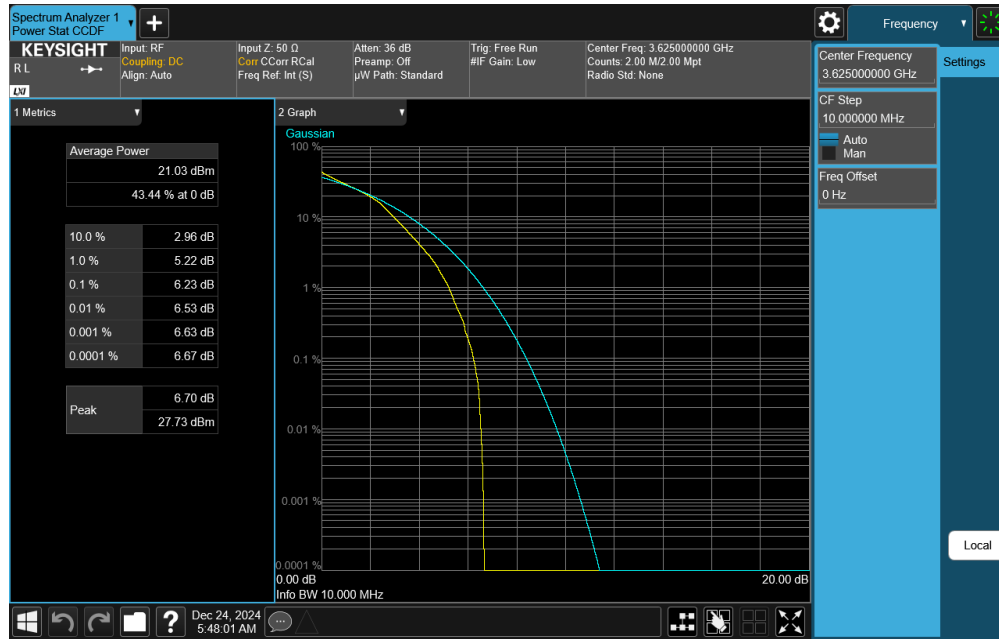

Plot 7-139. PAR Plot (NR Band n48 - 10MHz DFT-s-OFDM 16-QAM)

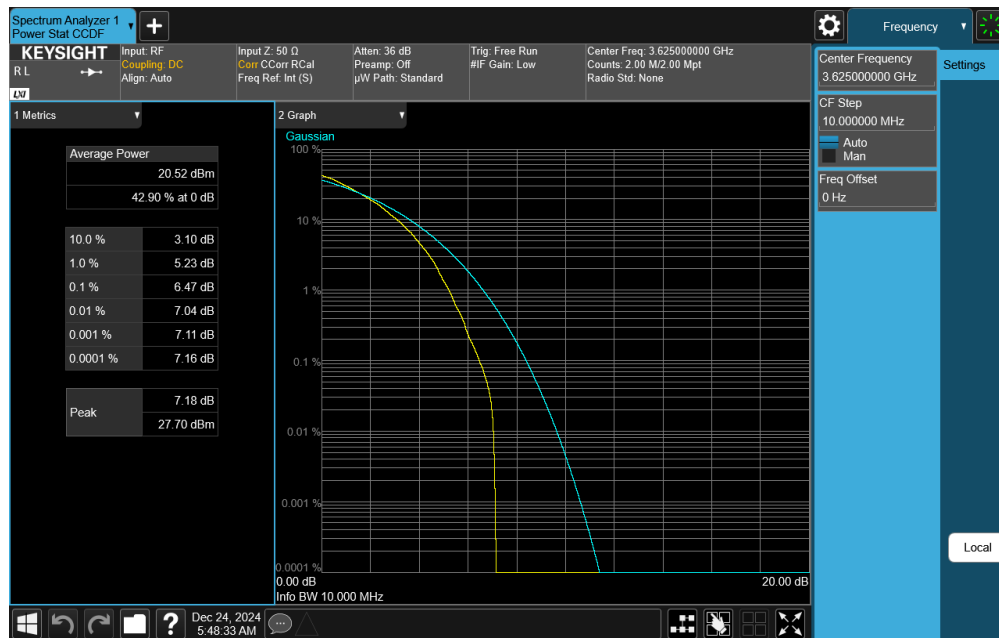


Plot 7-140. PAR Plot (NR Band n48 - 10MHz DFT-s-OFDM 64-QAM)


FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device
		Page 91 of 140

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

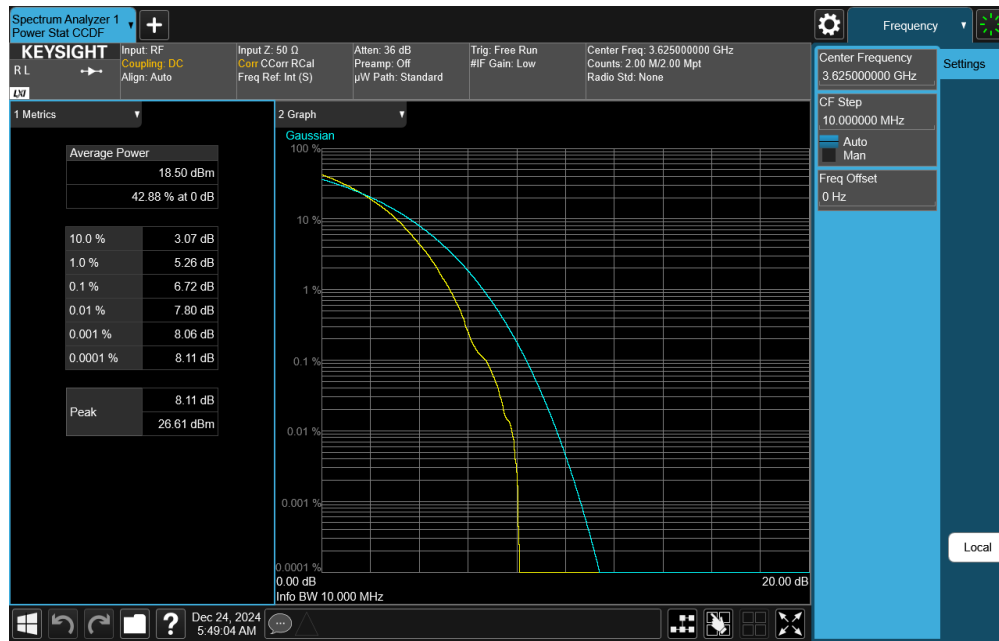

Plot 7-141. PAR Plot (NR Band n48 - 10MHz DFT-s-OFDM 256-QAM)

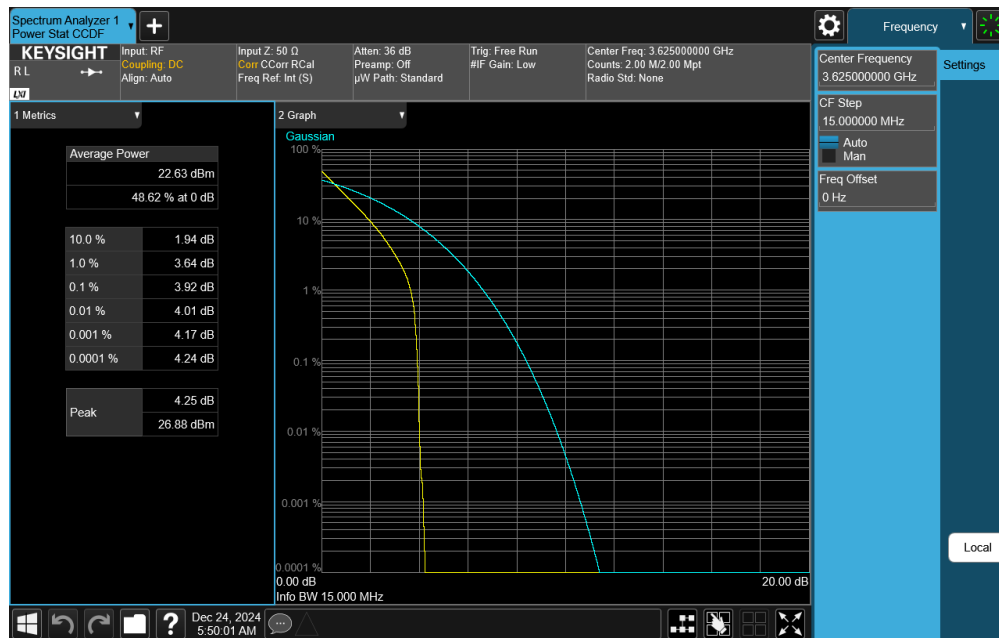


Plot 7-142. PAR Plot (NR Band n48 - 15MHz DFT-s-OFDM $\pi/2$ BPSK)


FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device
		Page 92 of 140

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

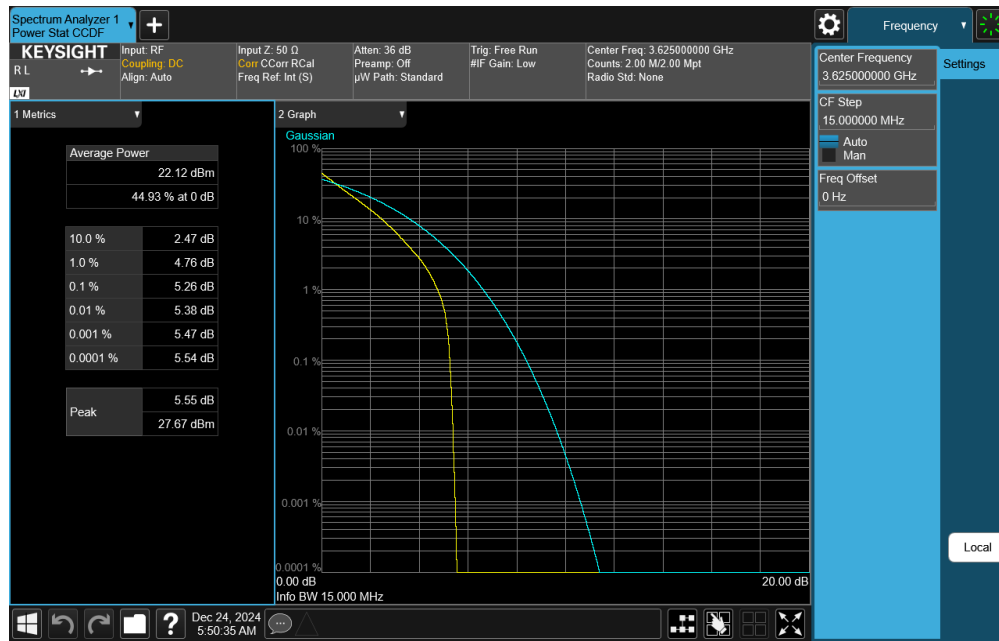

Plot 7-143. PAR Plot (NR Band n48 - 15MHz DFT-s-OFDM QPSK)

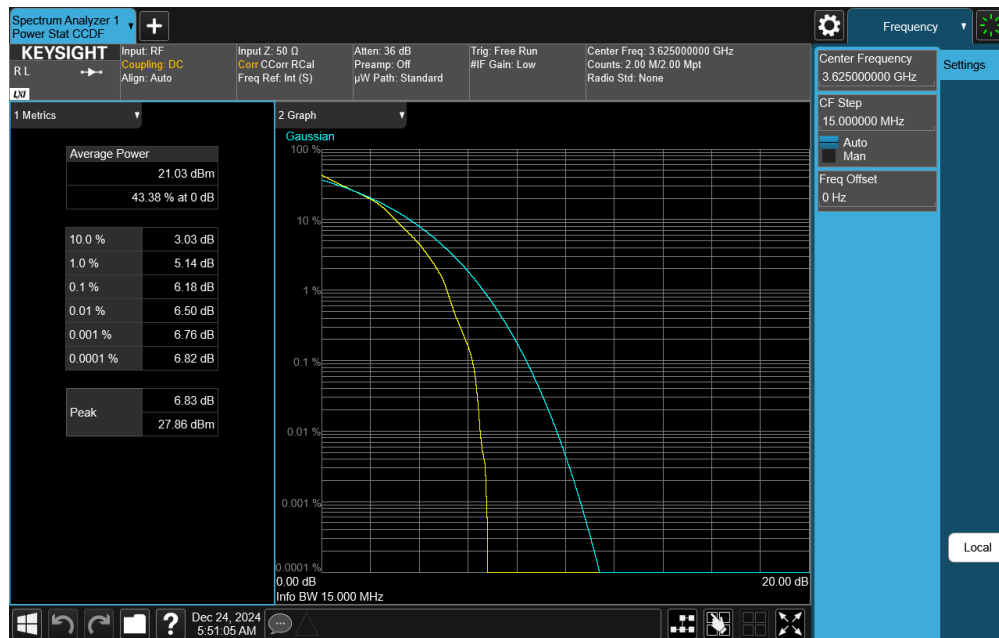


Plot 7-144. PAR Plot (NR Band n48 - 15MHz DFT-s-OFDM 16-QAM)


FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device
		Page 93 of 140

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

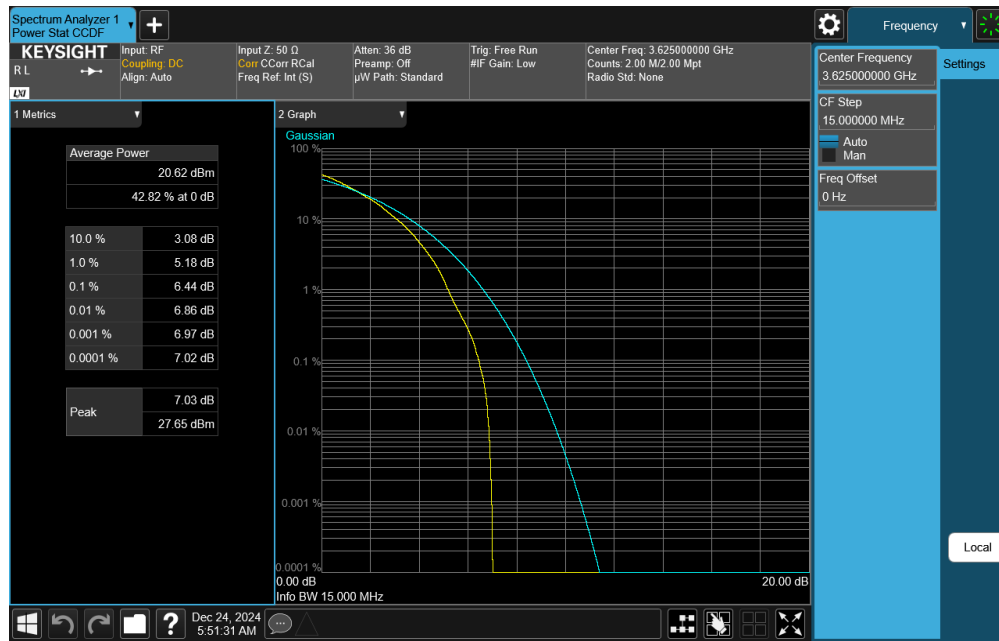

Plot 7-145. PAR Plot (NR Band n48 - 15MHz DFT-s-OFDM 64-QAM)

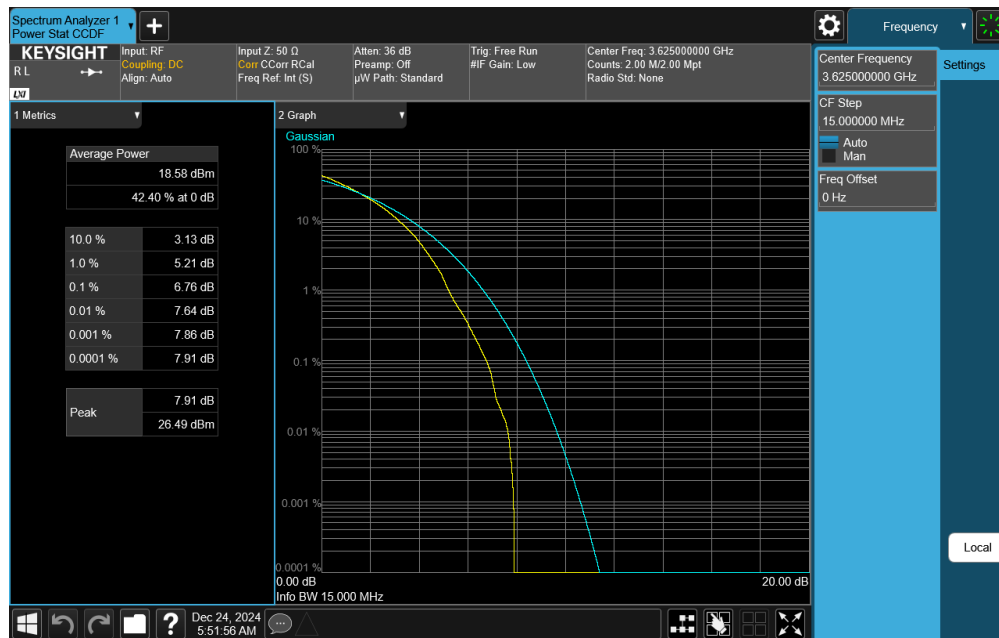


Plot 7-146. PAR Plot (NR Band n48 - 15MHz DFT-s-OFDM 256-QAM)


FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device
		Page 94 of 140

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

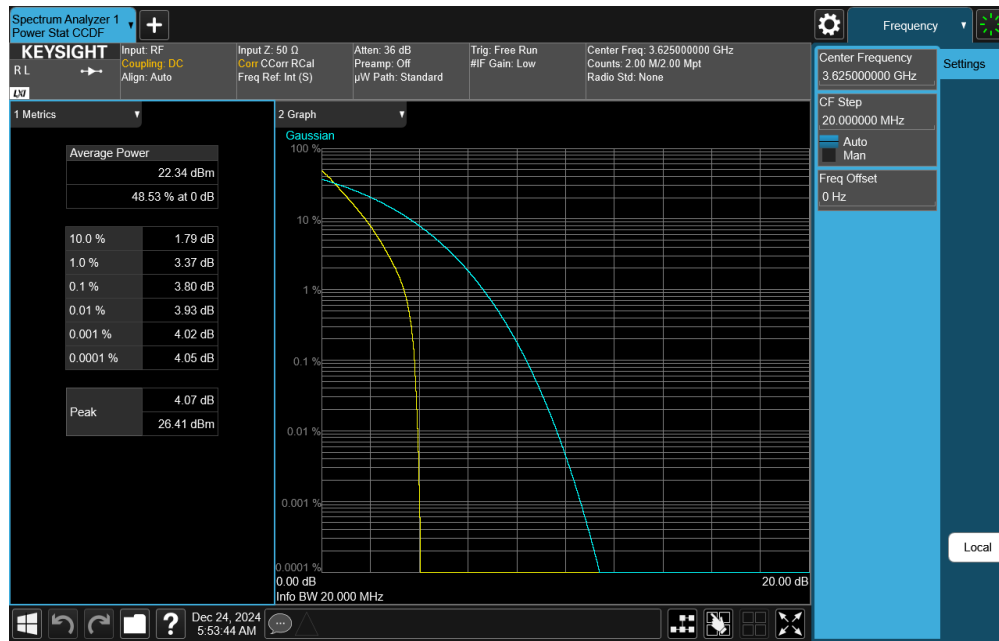

Plot 7-147. PAR Plot (NR Band n48 - 20MHz DFT-s-OFDM $\pi/2$ BPSK)

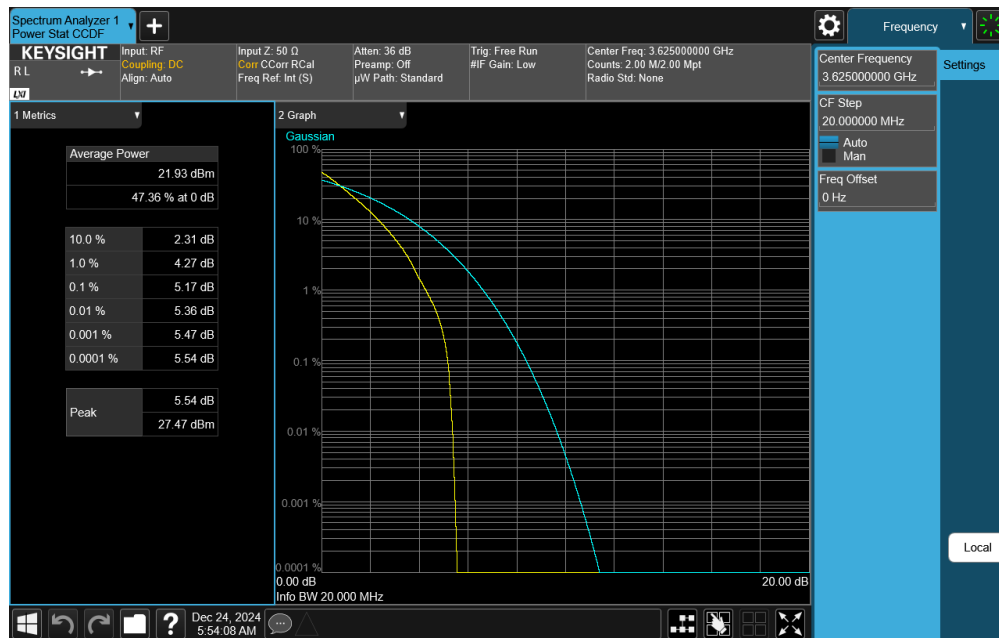


Plot 7-148. PAR Plot (NR Band n48 - 20MHz DFT-s-OFDM QPSK)


FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device
		Page 95 of 140

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

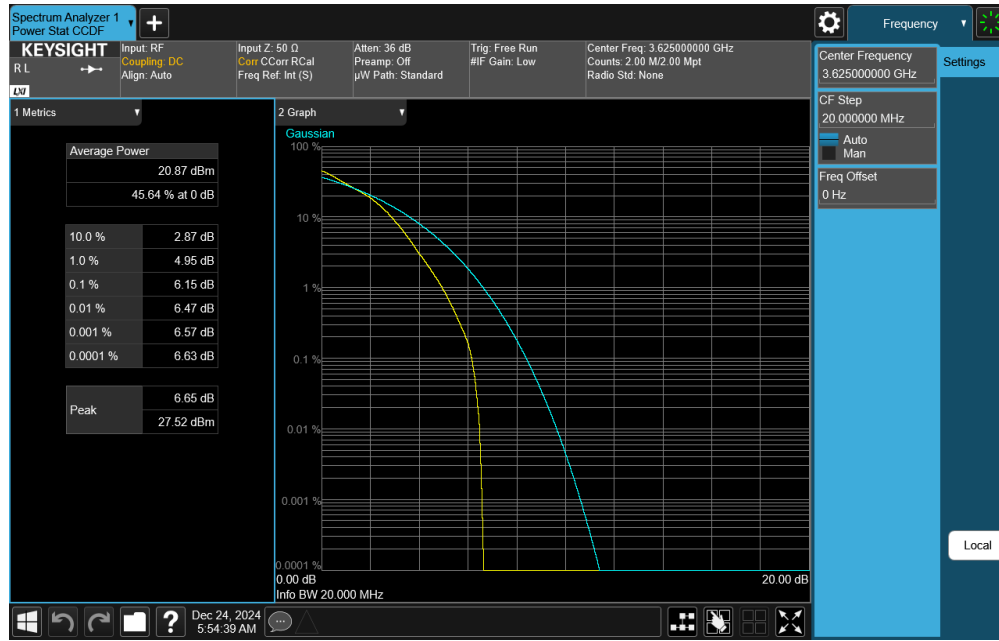

Plot 7-149. PAR Plot (NR Band n48 - 20MHz DFT-s-OFDM 16-QAM)

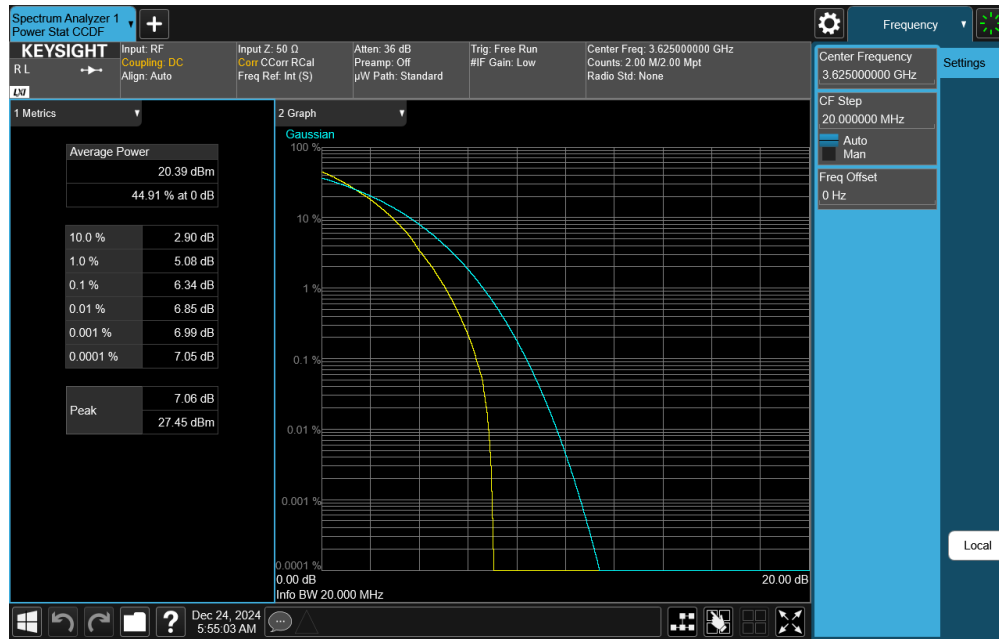


Plot 7-150. PAR Plot (NR Band n48 - 20MHz DFT-s-OFDM 64-QAM)


FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device
		Page 96 of 140

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

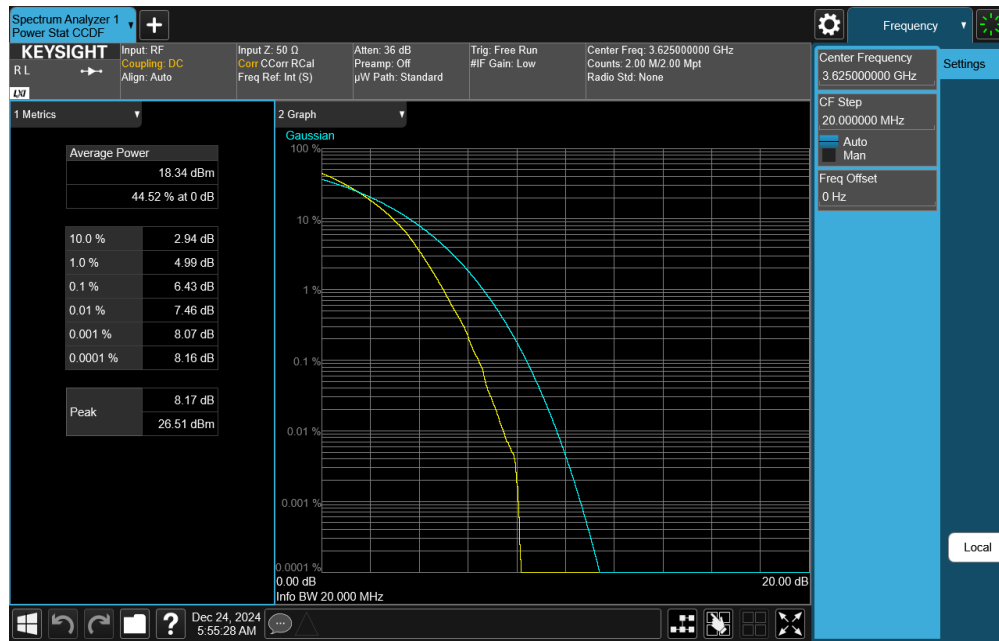

Plot 7-151. PAR Plot (NR Band n48 - 20MHz DFT-s-OFDM 256-QAM)

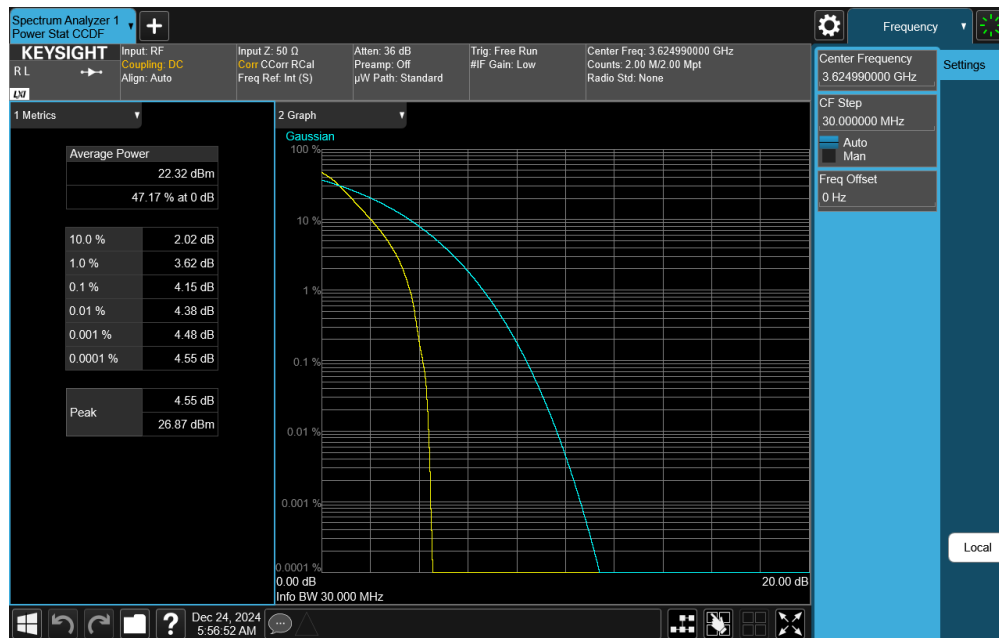


Plot 7-152. PAR Plot (NR Band n48 - 30MHz DFT-s-OFDM $\pi/2$ BPSK)


FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device
		Page 97 of 140

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

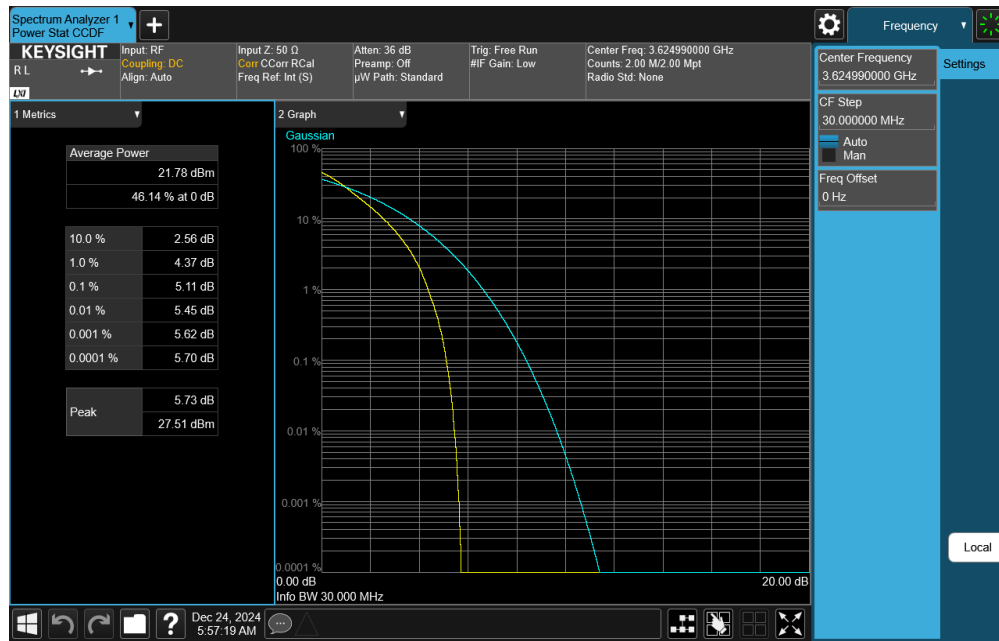

Plot 7-153. PAR Plot (NR Band n48 - 30MHz DFT-s-OFDM QPSK)

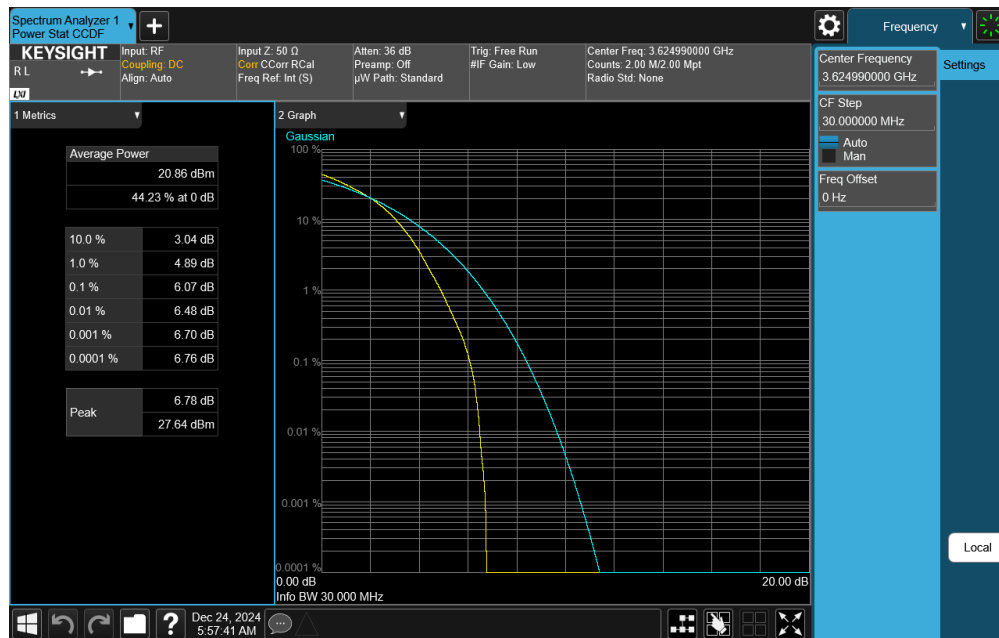


Plot 7-154. PAR Plot (NR Band n48 - 30MHz DFT-s-OFDM 16-QAM)


FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device
		Page 98 of 140

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

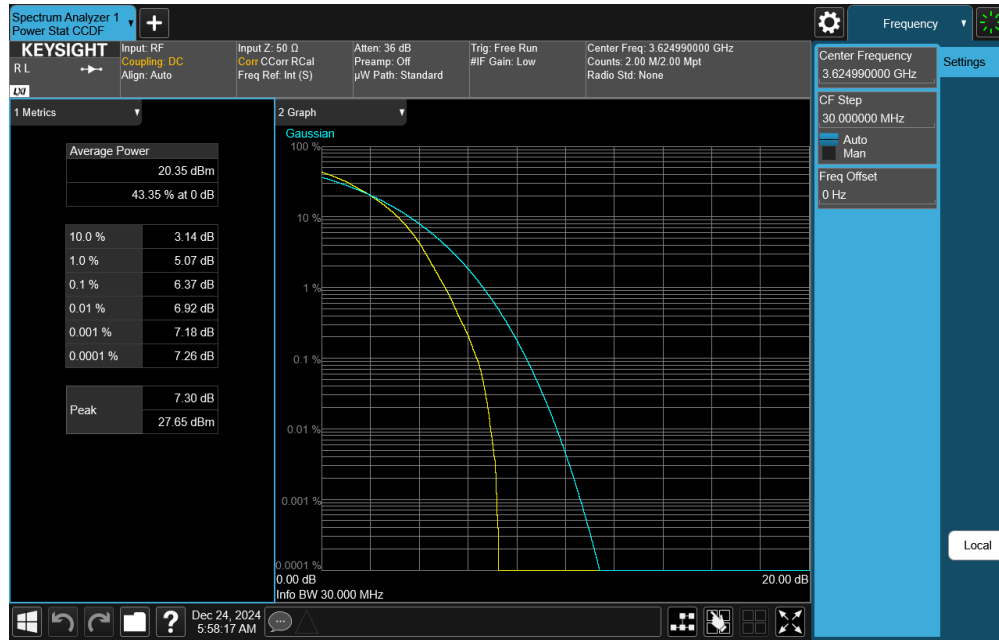

Plot 7-155. PAR Plot (NR Band n48 - 30MHz DFT-s-OFDM 64-QAM)

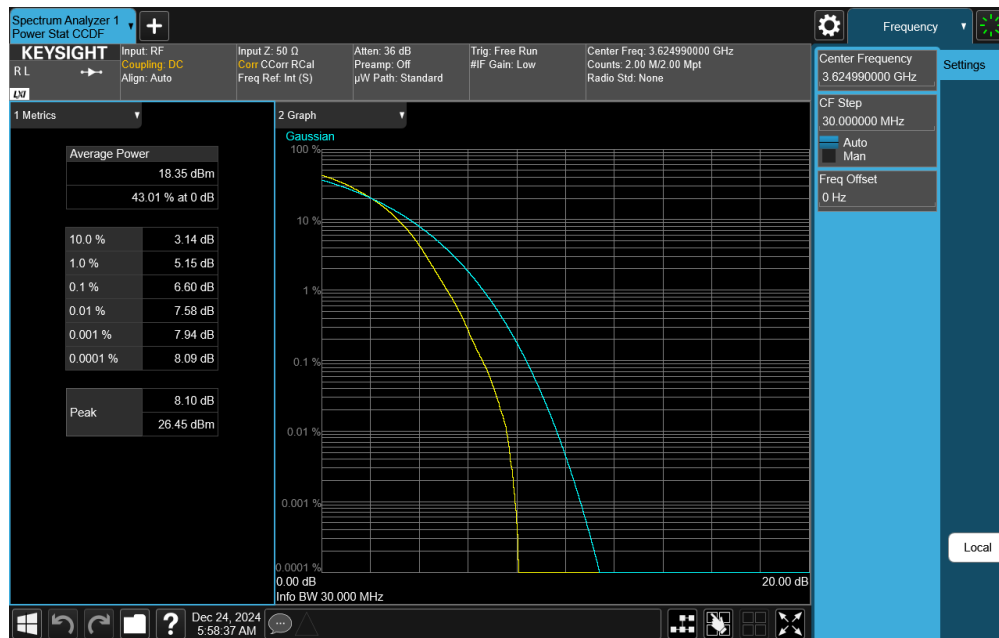


Plot 7-156. PAR Plot (NR Band n48 - 30MHz DFT-s-OFDM 256-QAM)


FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device
		Page 99 of 140

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

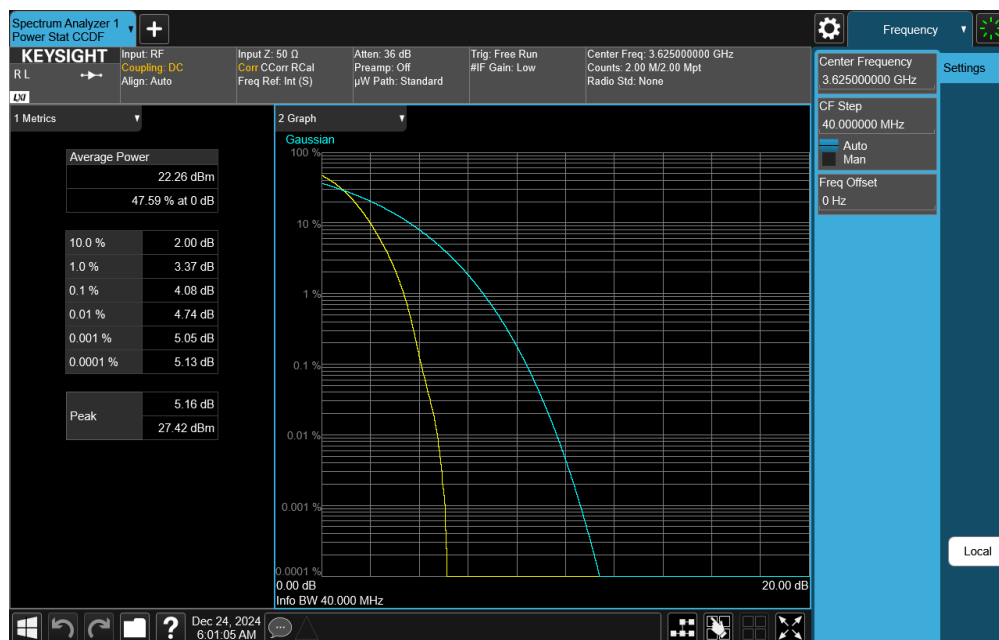

Plot 7-157. PAR Plot (NR Band n48 - 40MHz DFT-s-OFDM $\pi/2$ BPSK)

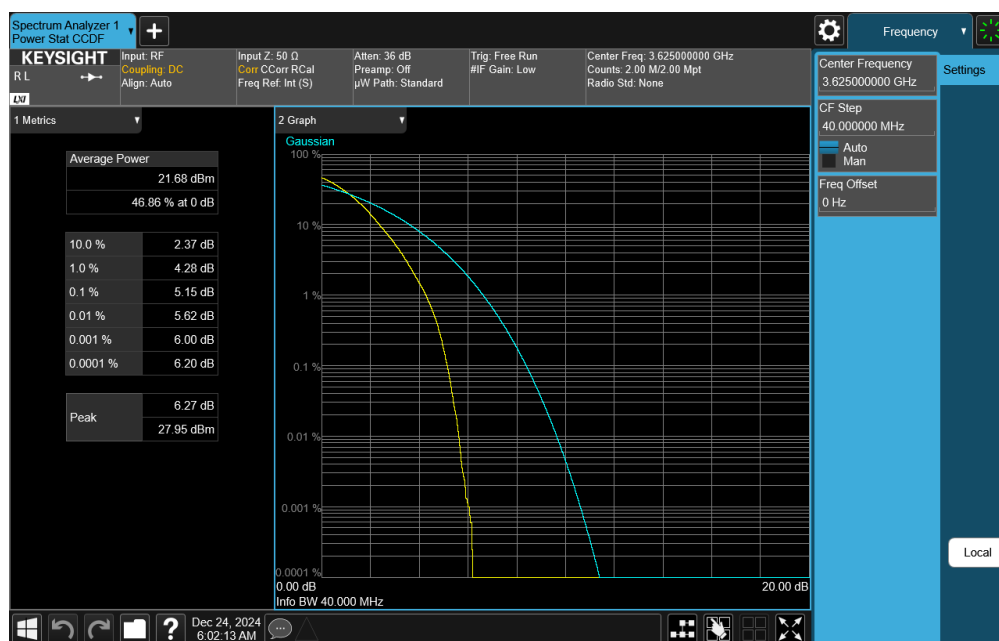


Plot 7-158. PAR Plot (NR Band n48 - 40MHz DFT-s-OFDM QPSK)


FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device
		Page 100 of 140

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

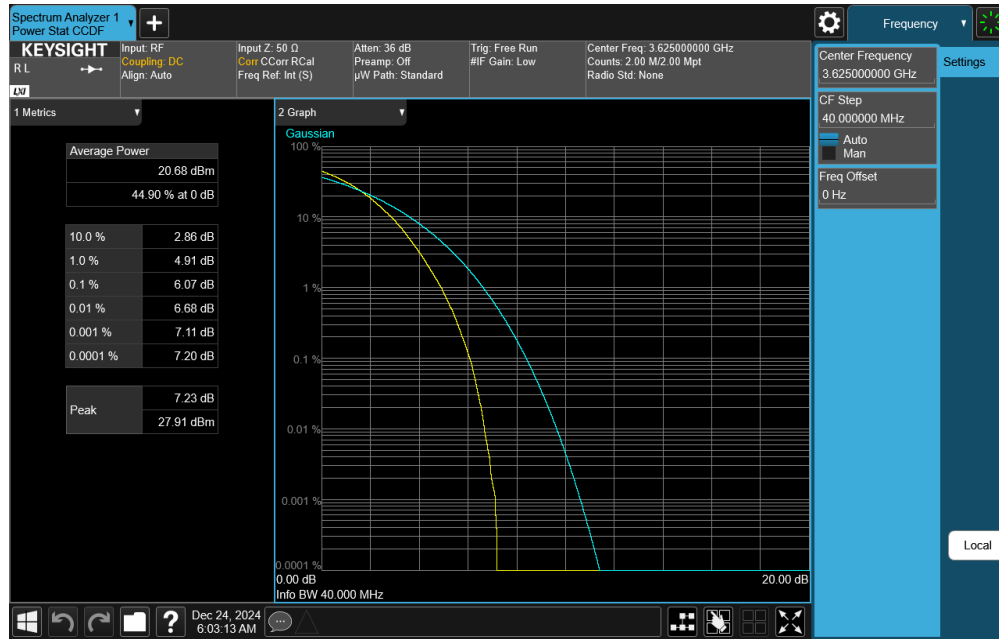

Plot 7-159. PAR Plot (NR Band n48 - 40MHz DFT-s-OFDM 16-QAM)

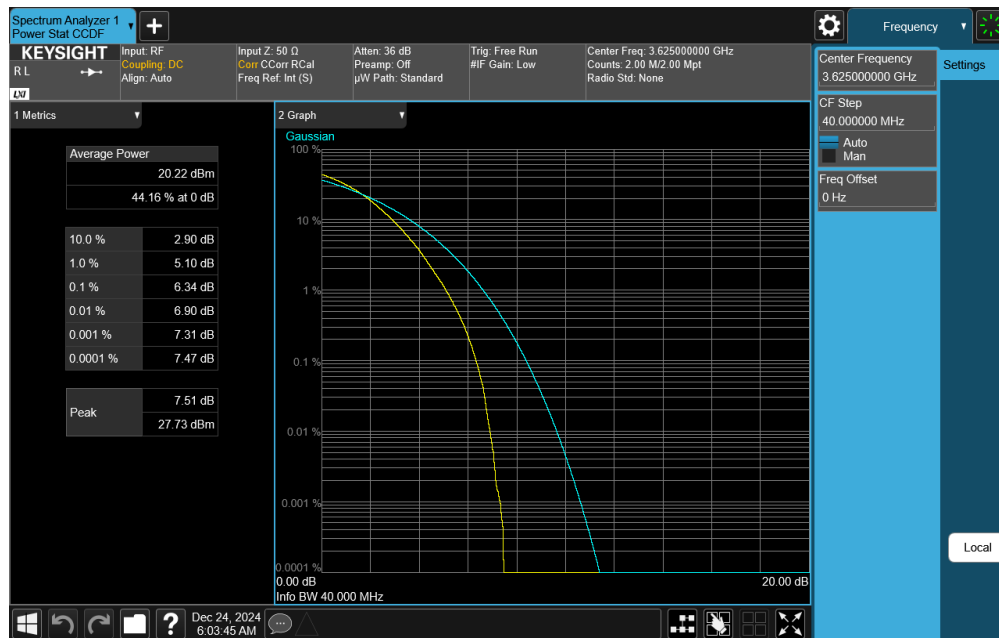


Plot 7-160. PAR Plot (NR Band n48 - 40MHz DFT-s-OFDM 64-QAM)

FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device
		Page 101 of 140

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

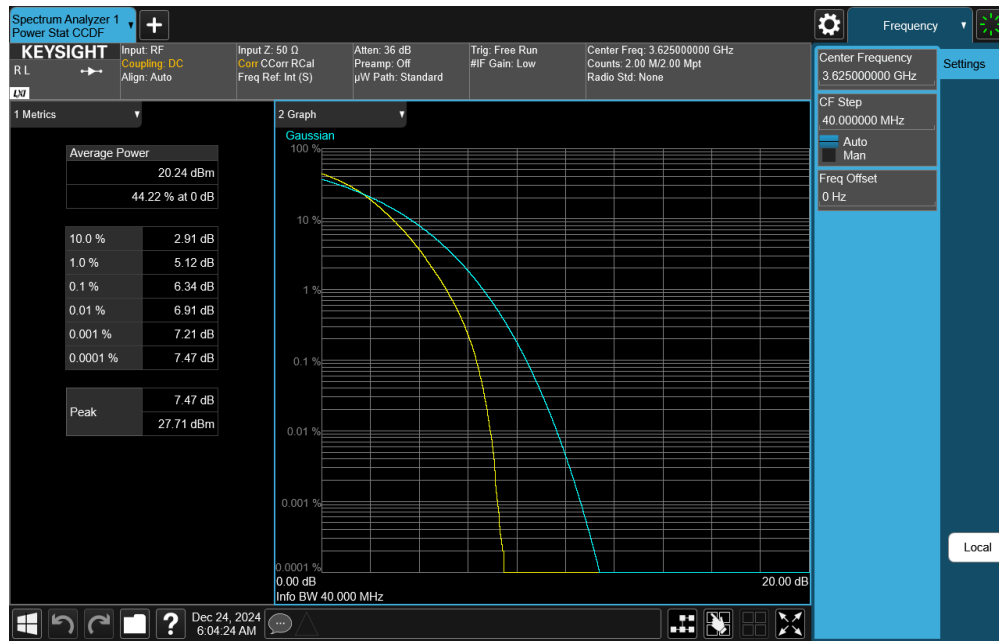

Plot 7-161. PAR Plot (NR Band n48 - 40MHz DFT-s-OFDM 256-QAM)

FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device
		Page 102 of 140

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.6 Radiated Power (EIRP)

§96.41(b)

Test Overview

Equivalent Isotropic Radiated Power (EIRP) measurements are calculated by adding highest antenna gain to maximum measured conducted output power. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI C63.26-2015

Test Settings

The relevant equation for determining the EIRP from the conducted RF output power measured is:

$$\text{EIRP} = \text{PMeas} - \text{LC} + \text{GT}$$

Where:

EIRP = Equivalent Isotropic Radiated Power (expressed in the same units as PMeas, typically dBW or dBm)

PMeas = measured transmitter output power or PSD, in dBW or dBm

LC = signal attenuation in the connecting cable between the transmitter and antenna in dB

GT = gain of the transmitting antenna, in dBi (EIRP)

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-9. LTE EIRP Measurement Setup




Figure 7-10. FR1 Test Instrument & Measurement Setup

FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device
		Page 103 of 140

V2.2 09/07/2023

Test Notes

- 1) The worst case emissions are reported with the modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.
- 3) The Level (dBm) readings in the table were taken with a correction table loaded into the base station simulator. The correction table was used to account for the signal attenuation in the connecting cable between the transmitter and antenna.
- 4) The worst case EIRP shown in this section is found with LTE & NR operating only using 1RB. As such, the EIRP/10MHz and full channel EIRP values will be identical since 1RB is fully contained within all available channel bandwidths for LTE Band 48 (i.e. 5, 10, 15, 20MHz) and NR FR1 Band 48 (i.e. 10, 15, 20, 30, 40MHz).
- 5) Uplink carrier aggregation for LTE B48 is only supported in this EUT while operating in Power Class 3.
- 6) For ULCA, conducted power measurements were evaluated for the two contiguous channels using various combinations of RB size, RB offset, modulation, and channel bandwidth. Channel bandwidth data is shown in the tables below based only on the channel bandwidths that were supported in this device.

FCC ID: BCGA3269		PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device	Page 104 of 140

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.6.1 Antenna 3a – EIRP

Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	EIRP [dBm/10MHz]	EIRP [Watts/10MHz]	EIRP Limit [dBm/10MHz]	Margin [dB]
5 MHz	QPSK	3552.5	1.90	1 / 12	20.60	22.50	0.178	23.00	-0.50
		3625.0	1.90	1 / 12	20.58	22.48	0.177	23.00	-0.52
		3697.5	1.90	1 / 0	20.45	22.35	0.172	23.00	-0.65
	16-QAM	3552.5	1.90	1 / 0	19.61	21.51	0.142	23.00	-1.49
	64-QAM	3697.5	1.90	1 / 12	18.58	20.48	0.112	23.00	-2.52
	256-QAM	3552.5	1.90	1 / 12	15.71	17.61	0.058	23.00	-5.39
10 MHz	QPSK	3555.0	1.90	1 / 0	20.60	22.50	0.178	23.00	-0.50
		3625.0	1.90	1 / 49	20.49	22.39	0.173	23.00	-0.61
		3695.0	1.90	1 / 0	20.45	22.35	0.172	23.00	-0.65
	16-QAM	3625.0	1.90	1 / 25	19.51	21.41	0.138	23.00	-1.59
	64-QAM	3695.0	1.90	1 / 0	18.64	20.54	0.113	23.00	-2.46
	256-QAM	3625.0	1.90	1 / 0	15.66	17.56	0.057	23.00	-5.44
15 MHz	QPSK	3557.5	1.90	1 / 37	20.49	22.39	0.173	23.00	-0.61
		3625.0	1.90	1 / 37	20.41	22.31	0.170	23.00	-0.69
		3692.5	1.90	1 / 37	20.16	22.06	0.161	23.00	-0.94
	16-QAM	3692.5	1.90	1 / 37	19.54	21.44	0.139	23.00	-1.56
	64-QAM	3692.5	1.90	1 / 37	18.60	20.50	0.112	23.00	-2.50
	256-QAM	3692.5	1.90	1 / 37	15.69	17.59	0.057	23.00	-5.41
20 MHz	QPSK	3560.0	1.90	1 / 50	20.32	22.22	0.167	23.00	-0.78
		3625.0	1.90	1 / 50	20.38	22.28	0.169	23.00	-0.72
		3690.0	1.90	1 / 50	20.22	22.12	0.163	23.00	-0.88
	16-QAM	3690.0	1.90	1 / 50	19.54	21.44	0.139	23.00	-1.56
	64-QAM	3690.0	1.90	1 / 50	18.57	20.47	0.111	23.00	-2.53
	256-QAM	3690.0	1.90	1 / 50	15.59	17.49	0.056	23.00	-5.51

Table 7-1. EIRP Data (LTE Band 48)

FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device
		Page 105 of 140

V2.2 09/07/2023

Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	EIRP [dBm/10MHz]	EIRP [Watts/10MHz]	EIRP Limit [dBm/10MHz]	Margin [dB]
10 MHz	π/2 BPSK	3555.0	1.90	1 / 22	20.27	22.17	0.165	23.00	-0.83
		3625.0	1.90	1 / 22	20.58	22.48	0.177	23.00	-0.52
		3695.0	1.90	1 / 12	20.34	22.24	0.167	23.00	-0.76
	QPSK	3555.0	1.90	1 / 1	20.56	22.46	0.176	23.00	-0.54
		3625.0	1.90	1 / 22	20.60	22.50	0.178	23.00	-0.50
		3695.0	1.90	1 / 1	20.39	22.29	0.169	23.00	-0.71
	16-QAM	3625.0	1.90	1 / 1	19.50	21.40	0.138	23.00	-1.60
	64-QAM	3695.0	1.90	1 / 1	18.59	20.49	0.112	23.00	-2.51
	256-QAM	3695.0	1.90	1 / 22	15.60	17.50	0.056	23.00	-5.50
15 MHz	π/2 BPSK	3557.5	1.90	1 / 1	20.52	22.42	0.175	23.00	-0.58
		3625.0	1.90	1 / 18	20.56	22.46	0.176	23.00	-0.54
		3692.5	1.90	1 / 18	20.59	22.49	0.177	23.00	-0.51
	QPSK	3557.5	1.90	1 / 18	20.55	22.45	0.176	23.00	-0.55
		3625.0	1.90	1 / 1	20.60	22.50	0.178	23.00	-0.50
		3692.5	1.90	1 / 18	20.53	22.43	0.175	23.00	-0.57
	16-QAM	3692.5	1.90	1 / 1	19.57	21.47	0.140	23.00	-1.53
	64-QAM	3692.5	1.90	1 / 18	18.59	20.49	0.112	23.00	-2.51
	256-QAM	3692.5	1.90	1 / 36	15.70	17.60	0.058	23.00	-5.40
20 MHz	π/2 BPSK	3560.0	1.90	1 / 49	20.51	22.41	0.174	23.00	-0.59
		3625.0	1.90	1 / 49	20.59	22.49	0.177	23.00	-0.51
		3690.0	1.90	1 / 1	20.60	22.50	0.178	23.00	-0.50
	QPSK	3560.0	1.90	1 / 25	20.56	22.46	0.176	23.00	-0.54
		3625.0	1.90	1 / 1	20.32	22.22	0.167	23.00	-0.78
		3690.0	1.90	1 / 1	20.40	22.30	0.170	23.00	-0.70
	16-QAM	3625.0	1.90	1 / 49	19.58	21.48	0.141	23.00	-1.52
	64-QAM	3560.0	1.90	1 / 25	18.56	20.46	0.111	23.00	-2.54
	256-QAM	3560.0	1.90	1 / 1	15.69	17.59	0.057	23.00	-5.41
30 MHz	π/2 BPSK	3565.0	1.90	1 / 1	20.44	22.34	0.171	23.00	-0.66
		3625.0	1.90	1 / 36	20.59	22.49	0.177	23.00	-0.51
		3685.0	1.90	1 / 1	20.39	22.29	0.169	23.00	-0.71
	QPSK	3565.0	1.90	1 / 76	20.60	22.50	0.178	23.00	-0.50
		3625.0	1.90	1 / 36	20.52	22.42	0.175	23.00	-0.58
		3685.0	1.90	1 / 1	20.59	22.49	0.177	23.00	-0.51
	16-QAM	3565.0	1.90	1 / 1	19.49	21.39	0.138	23.00	-1.61
	64-QAM	3685.0	1.90	1 / 36	18.55	20.45	0.111	23.00	-2.55
	256-QAM	3565.0	1.90	1 / 76	15.62	17.52	0.056	23.00	-5.48
40 MHz	π/2 BPSK	3570.0	1.90	1 / 104	20.56	22.46	0.176	23.00	-0.54
		3625.0	1.90	1 / 50	20.51	22.41	0.174	23.00	-0.59
		3680.0	1.90	1 / 1	20.46	22.36	0.172	23.00	-0.64
	QPSK	3570.0	1.90	1 / 104	20.60	22.50	0.178	23.00	-0.50
		3625.0	1.90	1 / 104	20.37	22.27	0.169	23.00	-0.73
		3680.0	1.90	1 / 50	20.57	22.47	0.177	23.00	-0.53
	16-QAM	3680.0	1.90	1 / 1	19.61	21.51	0.142	23.00	-1.49
	64-QAM	3570.0	1.90	1 / 50	18.59	20.49	0.112	23.00	-2.51
	256-QAM	3680.0	1.90	1 / 104	15.71	17.61	0.058	23.00	-5.39

Table 7-2. EIRP Data (NR Band n48)

FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device	Page 106 of 140

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Power State	Band	Bandwidth (PCC + SCC)	PCC					SCC					ULCA Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm/10MHz]	EIRP [Watts/10MHz]	EIRP Limit [dBm/10MHz]	Margin [dB]
			Modulation	UL Channel	UL Frequency [MHz]	UL # RB	UL RB Offset	Modulation	UL Channel	UL Frequency [MHz]	UL # RB	UL RB Offset						
Max	LTE B48	20MHz + 5MHz	QPSK	55340	3560.0	1	99	QPSK	55457	3571.7	1	0	20.12	1.90	22.02	0.159	23.00	-0.98
				55990	3625.0	1	99		56107	3636.7	1	0	20.44	1.90	22.34	0.171	23.00	-0.66
				56640	3690.0	1	0		56523	3678.3	1	24	20.09	1.90	21.99	0.158	23.00	-1.00
			16-QAM	55990	3625	100	0	QPSK	56107	3636.7	25	0	20.42	1.90	22.32	0.171	23.00	-0.68
				55990	3625	100	0	16-QAM	56107	3636.7	25	0	20.39	1.90	22.29	0.169	23.00	-0.71
				55990	3625	100	0	64-QAM	56107	3636.7	25	0	20.41	1.90	22.31	0.170	23.00	-0.69
Max	LTE B48	20MHz + 10MHz	QPSK	55340	3560.0	1	99	QPSK	55484	3574.4	1	0	19.56	1.90	21.46	0.140	23.00	-1.54
				55990	3625.0	1	99		56134	3639.4	1	0	20.43	1.90	22.33	0.171	23.00	-0.67
				56640	3690.0	1	0		56496	3675.6	1	49	19.35	1.90	21.25	0.133	23.00	-1.75
			16-QAM	55990	3625	100	0	QPSK	56134	3639.4	50	0	20.49	1.90	22.39	0.173	23.00	-0.61
				55990	3625	100	0	16-QAM	56134	3639.4	50	0	20.32	1.90	22.22	0.167	23.00	-0.78
				55990	3625	100	0	64-QAM	56134	3639.4	50	0	20.35	1.90	22.25	0.168	23.00	-0.75
Max	LTE B48	20MHz + 15MHz	QPSK	55340	3560.0	1	99	QPSK	55511	3577.1	1	0	19.52	1.90	21.42	0.139	23.00	-1.58
				55990	3625.0	1	99		56161	3642.1	1	0	20.44	1.90	22.34	0.171	23.00	-0.66
				56640	3690.0	1	0		56469	3672.9	1	74	19.48	1.90	21.38	0.137	23.00	-1.62
			16-QAM	55990	3625	100	0	QPSK	56161	3642.1	75	0	20.58	1.90	22.48	0.177	23.00	-0.52
				55990	3625	100	0	16-QAM	56161	3642.1	75	0	20.49	1.90	22.39	0.173	23.00	-0.61
				55990	3625	100	0	64-QAM	56161	3642.1	75	0	20.43	1.90	22.33	0.171	23.00	-0.67
Max	LTE B48	20MHz + 20MHz	QPSK	55340	3560.0	1	99	QPSK	55538	3579.8	1	0	19.55	1.90	21.45	0.140	23.00	-1.55
				55990	3625.0	1	99		56188	3644.8	1	0	20.54	1.90	22.44	0.175	23.00	-0.56
				56640	3690.0	1	0		56442	3670.2	1	99	19.38	1.90	21.28	0.134	23.00	-1.72
			16-QAM	55990	3625	100	0	QPSK	56188	3644.8	100	0	20.33	1.90	22.23	0.167	23.00	-0.77
				55990	3625	100	0	16-QAM	56188	3644.8	100	0	20.42	1.90	22.32	0.171	23.00	-0.68
				55990	3625	100	0	64-QAM	56188	3644.8	100	0	20.36	1.90	22.26	0.168	23.00	-0.74
Max	LTE B48	20MHz + 20MHz	256-QAM	55990	3625	100	0	256-QAM	56188	3644.8	100	0	20.28	1.90	22.18	0.165	23.00	-0.82

Table 7-3. EIRP Data (ULCA LTE Band 48)

FCC ID: BCGA3269		PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device	Page 107 of 140

7.6.2 Antenna 2 – EIRP

Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	EIRP [dBm/10MHz]	EIRP [Watts/10MHz]	EIRP Limit [dBm/10MHz]	Margin [dB]
5 MHz	QPSK	3552.5	3.00	1 / 12	19.42	22.42	0.175	23.00	-0.58
		3625.0	3.00	1 / 12	19.46	22.46	0.176	23.00	-0.54
		3697.5	3.00	1 / 12	19.43	22.43	0.175	23.00	-0.57
	16-QAM	3697.5	3.00	1 / 24	18.55	21.55	0.143	23.00	-1.45
	64-QAM	3552.5	3.00	1 / 12	17.53	20.53	0.113	23.00	-2.47
	256-QAM	3697.5	3.00	1 / 12	14.61	17.61	0.058	23.00	-5.39
10 MHz	QPSK	3555.0	3.00	1 / 49	19.47	22.47	0.177	23.00	-0.53
		3625.0	3.00	1 / 25	19.49	22.49	0.177	23.00	-0.51
		3695.0	3.00	1 / 49	19.49	22.49	0.177	23.00	-0.51
	16-QAM	3625.0	3.00	1 / 49	18.44	21.44	0.139	23.00	-1.56
	64-QAM	3555.0	3.00	1 / 0	17.37	20.37	0.109	23.00	-2.63
	256-QAM	3555.0	3.00	1 / 49	14.62	17.62	0.058	23.00	-5.38
15 MHz	QPSK	3557.5	3.00	1 / 37	19.38	22.38	0.173	23.00	-0.62
		3625.0	3.00	1 / 37	19.30	22.30	0.170	23.00	-0.70
		3692.5	3.00	1 / 37	19.13	22.13	0.163	23.00	-0.87
	16-QAM	3625.0	3.00	1 / 37	18.46	21.46	0.140	23.00	-1.54
	64-QAM	3692.5	3.00	1 / 37	17.45	20.45	0.111	23.00	-2.55
	256-QAM	3692.5	3.00	1 / 37	14.35	17.35	0.054	23.00	-5.65
20 MHz	QPSK	3560.0	3.00	1 / 50	19.32	22.32	0.171	23.00	-0.68
		3625.0	3.00	1 / 50	19.19	22.19	0.166	23.00	-0.81
		3690.0	3.00	1 / 50	19.49	22.49	0.177	23.00	-0.51
	16-QAM	3690.0	3.00	1 / 50	18.47	21.47	0.140	23.00	-1.53
	64-QAM	3690.0	3.00	1 / 50	17.26	20.26	0.106	23.00	-2.74
	256-QAM	3690.0	3.00	1 / 50	14.46	17.46	0.056	23.00	-5.54

Table 7-4. EIRP Data (LTE Band 48)

FCC ID: BCGA3269		PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device		Page 108 of 140

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	EIRP [dBm/10MHz]	EIRP [Watts/10MHz]	EIRP Limit [dBm/10MHz]	Margin [dB]
10 MHz	$\pi/2$ BPSK	3555.0	3.00	1 / 22	19.36	22.36	0.172	23.00	-0.64
		3625.0	3.00	1 / 1	19.40	22.40	0.174	23.00	-0.60
		3695.0	3.00	1 / 22	19.22	22.22	0.167	23.00	-0.78
	QPSK	3555.0	3.00	1 / 1	19.50	22.50	0.178	23.00	-0.50
		3625.0	3.00	1 / 12	19.46	22.46	0.176	23.00	-0.54
		3695.0	3.00	1 / 12	19.50	22.50	0.178	23.00	-0.50
	16-QAM	3695.0	3.00	1 / 1	18.53	21.53	0.142	23.00	-1.47
	64-QAM	3625.0	3.00	1 / 12	17.53	20.53	0.113	23.00	-2.47
	256-QAM	3625.0	3.00	1 / 1	14.59	17.59	0.057	23.00	-5.41
15 MHz	$\pi/2$ BPSK	3557.5	3.00	1 / 18	19.50	22.50	0.178	23.00	-0.50
		3625.0	3.00	1 / 18	19.41	22.41	0.174	23.00	-0.59
		3692.5	3.00	1 / 1	19.48	22.48	0.177	23.00	-0.52
	QPSK	3557.5	3.00	1 / 36	19.48	22.48	0.177	23.00	-0.52
		3625.0	3.00	1 / 18	19.36	22.36	0.172	23.00	-0.64
		3692.5	3.00	1 / 1	19.46	22.46	0.176	23.00	-0.54
	16-QAM	3692.5	3.00	1 / 18	18.47	21.47	0.140	23.00	-1.53
	64-QAM	3557.5	3.00	1 / 36	17.43	20.43	0.110	23.00	-2.57
	256-QAM	3692.5	3.00	1 / 18	14.59	17.59	0.057	23.00	-5.41
20 MHz	$\pi/2$ BPSK	3560.0	3.00	1 / 1	19.20	22.20	0.166	23.00	-0.80
		3625.0	3.00	1 / 1	19.27	22.27	0.169	23.00	-0.73
		3690.0	3.00	1 / 25	19.28	22.28	0.169	23.00	-0.72
	QPSK	3560.0	3.00	1 / 1	19.50	22.50	0.178	23.00	-0.50
		3625.0	3.00	1 / 25	19.30	22.30	0.170	23.00	-0.70
		3690.0	3.00	1 / 49	19.35	22.35	0.172	23.00	-0.65
	16-QAM	3690.0	3.00	1 / 25	18.45	21.45	0.140	23.00	-1.55
	64-QAM	3560.0	3.00	1 / 49	17.50	20.50	0.112	23.00	-2.50
	256-QAM	3625.0	3.00	1 / 49	14.58	17.58	0.057	23.00	-5.42
30 MHz	$\pi/2$ BPSK	3565.0	3.00	1 / 1	19.47	22.47	0.177	23.00	-0.53
		3625.0	3.00	1 / 76	19.50	22.50	0.178	23.00	-0.50
		3685.0	3.00	1 / 1	19.40	22.40	0.174	23.00	-0.60
	QPSK	3565.0	3.00	1 / 76	19.38	22.38	0.173	23.00	-0.62
		3625.0	3.00	1 / 36	19.49	22.49	0.177	23.00	-0.51
		3685.0	3.00	1 / 36	19.35	22.35	0.172	23.00	-0.65
	16-QAM	3625.0	3.00	1 / 36	18.50	21.50	0.141	23.00	-1.50
	64-QAM	3565.0	3.00	1 / 76	17.48	20.48	0.112	23.00	-2.52
	256-QAM	3625.0	3.00	1 / 76	14.56	17.56	0.057	23.00	-5.44
40 MHz	$\pi/2$ BPSK	3570.0	3.00	1 / 1	19.46	22.46	0.176	23.00	-0.54
		3625.0	3.00	1 / 104	19.32	22.32	0.171	23.00	-0.68
		3680.0	3.00	1 / 50	19.50	22.50	0.178	23.00	-0.50
	QPSK	3570.0	3.00	1 / 1	19.28	22.28	0.169	23.00	-0.72
		3625.0	3.00	1 / 104	19.40	22.40	0.174	23.00	-0.60
		3680.0	3.00	1 / 50	19.45	22.45	0.176	23.00	-0.55
	16-QAM	3625.0	3.00	1 / 50	18.48	21.48	0.141	23.00	-1.52
		3680.0	3.00	1 / 1	18.48	21.48	0.141	23.00	-1.52
	64-QAM	3680.0	3.00	1 / 1	17.52	20.52	0.113	23.00	-2.48
	256-QAM	3625.0	3.00	1 / 104	14.61	17.61	0.058	23.00	-5.39

Table 7-5. EIRP Data (NR Band n48)

FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device	Page 109 of 140

V2.2 09/07/2023

Power State	Band	Bandwidth (PCC + SCC)	PCC				SCC				ULCA Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm/10MHz]	EIRP [Watts/10MHz]	EIRP Limit [dBm/10MHz]	Margin [dB]
			Modulation	UL Channel	UL Frequency [MHz]	UL # RB	UL RB Offset	Modulation	UL Channel	UL Frequency [MHz]	UL # RB	UL RB Offset				
Max	LTE B48	20MHz + 5MHz	QPSK	55340	3560.0	1	99	QPSK	55457	3571.7	1	0	18.42	3.00	21.42	-1.58
				55990	3625.0	1	99		56107	3636.7	1	0	19.36	3.00	22.36	-0.64
				56640	3690.0	1	0		56523	3678.3	1	24	17.88	3.00	20.88	-2.12
			16-QAM	55990	3625	100	0	16-QAM	56107	3636.7	25	0	19.42	3.00	22.42	-0.58
				55990	3625	100	0		56107	3636.7	25	0	19.37	3.00	22.37	-0.63
				55990	3625	100	0		56107	3636.7	25	0	19.34	3.00	22.34	-0.66
			64-QAM	55990	3625	100	0	64-QAM	56107	3636.7	25	0	19.34	3.00	22.34	-0.66
				55990	3625	100	0		56107	3636.7	25	0	19.28	3.00	22.28	-0.72
Max	LTE B48	20MHz + 10MHz	QPSK	55340	3560.0	1	99	QPSK	55484	3574.4	1	0	17.33	3.00	20.33	-2.67
				55990	3625.0	1	99		56134	3639.4	1	0	19.43	3.00	22.43	-0.57
				56640	3690.0	1	0		56496	3675.6	1	49	17.37	3.00	20.37	-2.63
			16-QAM	55990	3625	100	0	16-QAM	56134	3639.4	50	0	19.46	3.00	22.46	-0.54
				55990	3625	100	0		56134	3639.4	50	0	19.39	3.00	22.39	-0.61
				55990	3625	100	0		56134	3639.4	50	0	19.37	3.00	22.37	-0.63
			64-QAM	55990	3625	100	0	64-QAM	56134	3639.4	50	0	19.29	3.00	22.29	-0.71
				55990	3625	100	0		56134	3639.4	50	0	19.29	3.00	22.29	-0.71
Max	LTE B48	20MHz + 15MHz	QPSK	55340	3560.0	1	99	QPSK	55511	3577.1	1	0	17.36	3.00	20.36	-2.64
				55990	3625.0	1	99		56161	3642.1	1	0	19.48	3.00	22.48	-0.52
				56640	3690.0	1	0		56469	3672.9	1	74	17.28	3.00	20.28	-2.72
			16-QAM	55990	3625	100	0	16-QAM	56161	3642.1	75	0	19.48	3.00	22.48	-0.52
				55990	3625	100	0		56161	3642.1	75	0	19.44	3.00	22.44	-0.56
				55990	3625	100	0		56161	3642.1	75	0	19.46	3.00	22.46	-0.54
			64-QAM	55990	3625	100	0	64-QAM	56161	3642.1	75	0	19.38	3.00	22.38	-0.62
				55990	3625	100	0		56161	3642.1	75	0	19.38	3.00	22.38	-0.62
Max	LTE B48	20MHz + 20MHz	QPSK	55340	3560.0	1	99	QPSK	55538	3579.8	1	0	18.89	3.00	21.89	-1.11
				55990	3625.0	1	99		56188	3644.8	1	0	19.43	3.00	22.43	-0.57
				56640	3690.0	1	0		56442	3670.2	1	99	18.76	3.00	21.76	-1.24
			16-QAM	55990	3625	100	0	16-QAM	56188	3644.8	100	0	19.43	3.00	22.43	-0.57
				55990	3625	100	0		56188	3644.8	100	0	19.41	3.00	22.41	-0.59
				55990	3625	100	0		56188	3644.8	100	0	19.37	3.00	22.37	-0.63
			64-QAM	55990	3625	100	0	64-QAM	56188	3644.8	100	0	19.38	3.00	22.38	-0.62
				55990	3625	100	0		56188	3644.8	100	0	19.38	3.00	22.38	-0.62

Table 7-6. EIRP Data (ULCA LTE Band 48)

FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device
		Page 110 of 140

V2.2 09/07/2023

7.6.3 Antenna 4 – EIRP

Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	EIRP [dBm/10MHz]	EIRP [Watts/10MHz]	EIRP Limit [dBm/10MHz]	Margin [dB]
5 MHz	QPSK	3552.5	1.40	1 / 12	21.08	22.48	0.177	23.00	-0.52
		3625.0	1.40	1 / 24	21.09	22.49	0.177	23.00	-0.51
		3697.5	1.40	1 / 12	20.88	22.28	0.169	23.00	-0.72
	16-QAM	3697.5	1.40	1 / 0	20.05	21.45	0.140	23.00	-1.55
	64-QAM	3552.5	1.40	1 / 12	19.05	20.45	0.111	23.00	-2.55
	256-QAM	3552.5	1.40	1 / 0	16.19	17.59	0.057	23.00	-5.41
10 MHz	QPSK	3555.0	1.40	1 / 25	21.10	22.50	0.178	23.00	-0.50
		3625.0	1.40	1 / 25	20.96	22.36	0.172	23.00	-0.64
		3695.0	1.40	1 / 25	20.87	22.27	0.169	23.00	-0.73
	16-QAM	3555.0	1.40	1 / 0	20.07	21.47	0.140	23.00	-1.53
	64-QAM	3625.0	1.40	1 / 0	19.06	20.46	0.111	23.00	-2.54
	256-QAM	3555.0	1.40	1 / 49	16.17	17.57	0.057	23.00	-5.43
15 MHz	QPSK	3557.5	1.40	1 / 37	20.67	22.07	0.161	23.00	-0.93
		3625.0	1.40	1 / 37	20.84	22.24	0.167	23.00	-0.76
		3692.5	1.40	1 / 37	21.04	22.44	0.175	23.00	-0.56
	16-QAM	3692.5	1.40	1 / 37	19.92	21.32	0.136	23.00	-1.68
	64-QAM	3692.5	1.40	1 / 37	18.89	20.29	0.107	23.00	-2.71
	256-QAM	3692.5	1.40	1 / 37	15.98	17.38	0.055	23.00	-5.62
20 MHz	QPSK	3560.0	1.40	1 / 50	21.10	22.50	0.178	23.00	-0.50
		3625.0	1.40	1 / 50	20.83	22.23	0.167	23.00	-0.77
		3690.0	1.40	1 / 50	21.02	22.42	0.175	23.00	-0.58
	16-QAM	3625.0	1.40	1 / 50	20.10	21.50	0.141	23.00	-1.50
	64-QAM	3560.0	1.40	1 / 50	19.13	20.53	0.113	23.00	-2.47
	256-QAM	3625.0	1.40	1 / 50	15.93	17.33	0.054	23.00	-5.67

Table 7-7. EIRP Data (LTE Band 48)

FCC ID: BCGA3269		PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device		Page 111 of 140

V2.2 09/07/2023

Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	EIRP [dBm/10MHz]	EIRP [Watts/10MHz]	EIRP Limit [dBm/10MHz]	Margin [dB]
10 MHz	π/2 BPSK	3555.0	1.40	1 / 12	20.84	22.24	0.167	23.00	-0.76
		3625.0	1.40	1 / 1	21.04	22.44	0.175	23.00	-0.56
		3695.0	1.40	1 / 12	21.07	22.47	0.177	23.00	-0.53
	QPSK	3555.0	1.40	1 / 12	21.09	22.49	0.177	23.00	-0.51
		3625.0	1.40	1 / 1	21.10	22.50	0.178	23.00	-0.50
		3695.0	1.40	1 / 22	20.89	22.29	0.169	23.00	-0.71
	16-QAM	3625.0	1.40	1 / 1	20.07	21.47	0.140	23.00	-1.53
	64-QAM	3625.0	1.40	1 / 22	19.10	20.50	0.112	23.00	-2.50
	256-QAM	3625.0	1.40	1 / 12	16.17	17.57	0.057	23.00	-5.43
15 MHz	π/2 BPSK	3557.5	1.40	1 / 1	20.88	22.28	0.169	23.00	-0.72
		3625.0	1.40	1 / 1	20.71	22.11	0.163	23.00	-0.89
		3692.5	1.40	1 / 36	21.07	22.47	0.177	23.00	-0.53
	QPSK	3557.5	1.40	1 / 18	21.10	22.50	0.178	23.00	-0.50
		3625.0	1.40	1 / 18	20.92	22.32	0.171	23.00	-0.68
		3692.5	1.40	1 / 1	20.93	22.33	0.171	23.00	-0.67
	16-QAM	3625.0	1.40	1 / 36	20.07	21.47	0.140	23.00	-1.53
	64-QAM	3625.0	1.40	1 / 1	19.13	20.53	0.113	23.00	-2.47
	256-QAM	3692.5	1.40	1 / 1	16.17	17.57	0.057	23.00	-5.43
20 MHz	π/2 BPSK	3560.0	1.40	1 / 1	21.07	22.47	0.177	23.00	-0.53
		3625.0	1.40	1 / 25	21.10	22.50	0.178	23.00	-0.50
		3690.0	1.40	1 / 25	21.10	22.50	0.178	23.00	-0.50
	QPSK	3560.0	1.40	1 / 49	20.82	22.22	0.167	23.00	-0.78
		3625.0	1.40	1 / 1	21.08	22.48	0.177	23.00	-0.52
		3690.0	1.40	1 / 1	21.00	22.40	0.174	23.00	-0.60
	16-QAM	3690.0	1.40	1 / 25	20.09	21.49	0.141	23.00	-1.51
	64-QAM	3625.0	1.40	1 / 1	19.05	20.45	0.111	23.00	-2.55
	256-QAM	3560.0	1.40	1 / 1	16.14	17.54	0.057	23.00	-5.46
30 MHz	π/2 BPSK	3565.0	1.40	1 / 36	20.98	22.38	0.173	23.00	-0.62
		3625.0	1.40	1 / 76	21.07	22.47	0.177	23.00	-0.53
		3685.0	1.40	1 / 1	21.07	22.47	0.177	23.00	-0.53
	QPSK	3565.0	1.40	1 / 36	21.10	22.50	0.178	23.00	-0.50
		3625.0	1.40	1 / 76	20.86	22.26	0.168	23.00	-0.74
		3685.0	1.40	1 / 36	20.89	22.29	0.169	23.00	-0.71
	16-QAM	3685.0	1.40	1 / 1	20.13	21.53	0.142	23.00	-1.47
	64-QAM	3685.0	1.40	1 / 1	19.10	20.50	0.112	23.00	-2.50
	256-QAM	3685.0	1.40	1 / 36	16.24	17.64	0.058	23.00	-5.36
40 MHz	π/2 BPSK	3570.0	1.40	1 / 104	21.10	22.50	0.178	23.00	-0.50
		3625.0	1.40	1 / 104	20.94	22.34	0.171	23.00	-0.66
		3680.0	1.40	1 / 1	21.01	22.41	0.174	23.00	-0.59
	QPSK	3570.0	1.40	1 / 1	20.79	22.19	0.166	23.00	-0.81
		3625.0	1.40	1 / 50	21.04	22.44	0.175	23.00	-0.56
		3680.0	1.40	1 / 104	21.08	22.48	0.177	23.00	-0.52
	16-QAM	3625.0	1.40	1 / 50	20.07	21.47	0.140	23.00	-1.53
	64-QAM	3570.0	1.40	1 / 104	19.11	20.51	0.112	23.00	-2.49
	256-QAM	3570.0	1.40	1 / 104	16.14	17.54	0.057	23.00	-5.46

Table 7-8. EIRP Data (NR Band n48)

FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device	Page 112 of 140

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Power State	Band	Bandwidth (PCC + SCC)	PCC					SCC					ULCA Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm/10MHz]	EIRP [Watts/10MHz]	EIRP Limit [dBm/10MHz]	Margin [dB]		
			Modulation	UL Channel	UL Frequency [MHz]	UL # RB	UL RB Offset	Modulation	UL Channel	UL Frequency [MHz]	UL # RB	UL RB Offset								
Max	LTE B48	20MHz + 5MHz	QPSK	55340	3560.0	1	99	QPSK	55457	3571.7	1	0	20.59	1.40	21.99	0.158	23.00	-1.01		
				55990	3625.0	1	99		56107	3636.7	1	0	20.95	1.40	22.36	0.172	23.00	-0.64		
				56640	3690.0	1	0		56623	3678.3	1	24	20.16	1.40	21.56	0.143	23.00	-1.44		
				QPSK	55990	3625	100		0	QPSK	56107	3636.7	25	0	21.09	1.40	22.49	0.177	23.00	-0.51
				16-QAM	55990	3625	100		0	16-QAM	56107	3636.7	25	0	20.96	1.40	22.36	0.172	23.00	-0.64
				64-QAM	55990	3625	100		0	64-QAM	56107	3636.7	25	0	20.94	1.40	22.34	0.171	23.00	-0.66
Max	LTE B48	20MHz + 10MHz	QPSK	55340	3560.0	1	99	QPSK	55484	3574.4	1	0	19.67	1.40	21.07	0.128	23.00	-1.93		
				55990	3625.0	1	99		56134	3639.4	1	0	21.10	1.40	22.50	0.178	23.00	-0.50		
				56640	3690.0	1	0		56496	3675.6	1	49	19.65	1.40	21.05	0.127	23.00	-1.95		
				QPSK	55990	3625	100		0	QPSK	56134	3639.4	50	0	20.99	1.40	22.39	0.173	23.00	-0.61
				16-QAM	55990	3625	100		0	16-QAM	56134	3639.4	50	0	20.91	1.40	22.31	0.170	23.00	-0.69
				64-QAM	55990	3625	100		0	64-QAM	56134	3639.4	50	0	20.89	1.40	22.29	0.169	23.00	-0.71
Max	LTE B48	20MHz + 15MHz	QPSK	55340	3560.0	1	99	QPSK	55511	3577.1	1	0	19.63	1.40	21.03	0.127	23.00	-1.97		
				55990	3625.0	1	99		56161	3642.1	1	0	21.10	1.40	22.50	0.178	23.00	-0.50		
				56640	3690.0	1	0		56469	3672.9	1	74	19.47	1.40	20.87	0.122	23.00	-2.13		
				QPSK	55990	3625	100		0	QPSK	56161	3642.1	75	0	21.05	1.40	22.45	0.176	23.00	-0.55
				16-QAM	55990	3625	100		0	16-QAM	56161	3642.1	75	0	20.89	1.40	22.29	0.169	23.00	-0.71
				64-QAM	55990	3625	100		0	64-QAM	56161	3642.1	75	0	20.86	1.40	22.26	0.168	23.00	-0.74
Max	LTE B48	20MHz + 20MHz	QPSK	55990	3625	100	0	256-QAM	56161	3642.1	75	0	20.78	1.40	22.18	0.165	23.00	-0.82		
				55340	3560.0	1	99	55538	3579.8	1	0	20.75	1.40	22.15	0.164	23.00	-0.85			
				55990	3625.0	1	99	56188	3644.8	1	0	20.96	1.40	22.36	0.172	23.00	-0.64			
				56640	3690.0	1	0	56442	3670.2	1	99	20.69	1.40	22.09	0.162	23.00	-0.91			
				QPSK	55990	3625	100	0	QPSK	56188	3644.8	100	0	20.96	1.40	22.36	0.172	23.00	-0.64	
				16-QAM	55990	3625	100	0	16-QAM	56188	3644.8	100	0	20.95	1.40	22.35	0.172	23.00	-0.64	
Max	LTE B48	20MHz + 20MHz	QPSK	55990	3625	100	0	64-QAM	56188	3644.8	100	0	20.84	1.40	22.24	0.167	23.00	-0.76		
				64-QAM	55990	3625	100	0	64-QAM	56188	3644.8	100	0	20.84	1.40	22.24	0.167	23.00	-0.76	
				256-QAM	55990	3625	100	0	256-QAM	56188	3644.8	100	0	20.77	1.40	22.17	0.165	23.00	-0.83	
				256-QAM	55990	3625	100	0	256-QAM	56188	3644.8	100	0	20.77	1.40	22.17	0.165	23.00	-0.83	

Table 7-9. EIRP Data (ULCA LTE Band 48)

FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device
		Page 113 of 140

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.6.4 Antenna 1a – EIRP

Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	EIRP [dBm/10MHz]	EIRP [Watts/10MHz]	EIRP Limit [dBm/10MHz]	Margin [dB]
5 MHz	QPSK	3552.5	-0.70	1 / 24	23.20	22.50	0.178	23.00	-0.50
		3625.0	-0.70	1 / 24	23.18	22.48	0.177	23.00	-0.52
		3697.5	-0.70	1 / 0	22.85	22.15	0.164	23.00	-0.85
	16-QAM	3552.5	-0.70	1 / 12	22.07	21.37	0.137	23.00	-1.63
	64-QAM	3697.5	-0.70	1 / 0	21.16	20.46	0.111	23.00	-2.54
	256-QAM	3697.5	-0.70	1 / 12	18.16	17.46	0.056	23.00	-5.54
10 MHz	QPSK	3555.0	-0.70	1 / 0	22.92	22.22	0.167	23.00	-0.78
		3625.0	-0.70	1 / 49	22.95	22.25	0.168	23.00	-0.75
		3695.0	-0.70	1 / 49	22.87	22.17	0.165	23.00	-0.83
	16-QAM	3625.0	-0.70	1 / 25	22.15	21.45	0.140	23.00	-1.55
	64-QAM	3625.0	-0.70	1 / 49	21.15	20.45	0.111	23.00	-2.55
	256-QAM	3555.0	-0.70	1 / 49	18.23	17.53	0.057	23.00	-5.47
15 MHz	QPSK	3557.5	-0.70	1 / 37	22.85	22.15	0.164	23.00	-0.85
		3625.0	-0.70	1 / 37	23.20	22.50	0.178	23.00	-0.50
		3692.5	-0.70	1 / 37	23.16	22.46	0.176	23.00	-0.54
	16-QAM	3625.0	-0.70	1 / 37	22.26	21.56	0.143	23.00	-1.44
	64-QAM	3692.5	-0.70	1 / 37	21.28	20.58	0.114	23.00	-2.42
	256-QAM	3625.0	-0.70	1 / 37	18.40	17.70	0.059	23.00	-5.30
20 MHz	QPSK	3560.0	-0.70	1 / 50	23.04	22.34	0.171	23.00	-0.66
		3625.0	-0.70	1 / 50	23.17	22.47	0.177	23.00	-0.53
		3690.0	-0.70	1 / 50	23.07	22.37	0.173	23.00	-0.63
	16-QAM	3625.0	-0.70	1 / 50	22.20	21.50	0.141	23.00	-1.50
	64-QAM	3690.0	-0.70	1 / 50	21.21	20.51	0.112	23.00	-2.49
	256-QAM	3560.0	-0.70	1 / 50	18.10	17.40	0.055	23.00	-5.60

Table 7-10. EIRP Data (LTE Band 48)

FCC ID: BCGA3269		PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device		Page 114 of 140

V2.2 09/07/2023

Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	EIRP [dBm/10MHz]	EIRP [Watts/10MHz]	EIRP Limit [dBm/10MHz]	Margin [dB]
10 MHz	$\pi/2$ BPSK	3555.0	-0.70	1 / 12	22.83	22.13	0.163	23.00	-0.87
		3625.0	-0.70	1 / 1	23.18	22.48	0.177	23.00	-0.52
		3695.0	-0.70	1 / 12	22.99	22.29	0.169	23.00	-0.71
	QPSK	3555.0	-0.70	1 / 1	23.20	22.50	0.178	23.00	-0.50
		3625.0	-0.70	1 / 22	22.98	22.28	0.169	23.00	-0.72
		3695.0	-0.70	1 / 1	23.01	22.31	0.170	23.00	-0.69
	16-QAM	3625.0	-0.70	1 / 12	22.05	21.35	0.136	23.00	-1.65
	64-QAM	3625.0	-0.70	1 / 1	21.20	20.50	0.112	23.00	-2.50
	256-QAM	3695.0	-0.70	1 / 22	18.31	17.61	0.058	23.00	-5.39
15 MHz	$\pi/2$ BPSK	3557.5	-0.70	1 / 1	23.13	22.43	0.175	23.00	-0.57
		3625.0	-0.70	1 / 36	23.07	22.37	0.173	23.00	-0.63
		3692.5	-0.70	1 / 18	23.11	22.41	0.174	23.00	-0.59
	QPSK	3557.5	-0.70	1 / 36	23.09	22.39	0.173	23.00	-0.61
		3625.0	-0.70	1 / 36	23.15	22.45	0.176	23.00	-0.55
		3692.5	-0.70	1 / 1	23.20	22.50	0.178	23.00	-0.50
	16-QAM	3557.5	-0.70	1 / 1	22.13	21.43	0.139	23.00	-1.57
	64-QAM	3557.5	-0.70	1 / 18	21.13	20.43	0.110	23.00	-2.57
	256-QAM	3692.5	-0.70	1 / 1	18.33	17.63	0.058	23.00	-5.37
20 MHz	$\pi/2$ BPSK	3560.0	-0.70	1 / 49	22.96	22.26	0.168	23.00	-0.74
		3625.0	-0.70	1 / 25	23.20	22.50	0.178	23.00	-0.50
		3690.0	-0.70	1 / 25	23.17	22.47	0.177	23.00	-0.53
	QPSK	3560.0	-0.70	1 / 1	22.91	22.21	0.166	23.00	-0.79
		3625.0	-0.70	1 / 25	23.04	22.34	0.171	23.00	-0.66
		3690.0	-0.70	1 / 25	22.73	22.03	0.160	23.00	-0.97
	16-QAM	3625.0	-0.70	1 / 25	22.18	21.48	0.141	23.00	-1.52
	64-QAM	3690.0	-0.70	1 / 1	21.17	20.47	0.111	23.00	-2.53
	256-QAM	3560.0	-0.70	1 / 25	18.04	17.34	0.054	23.00	-5.66
30 MHz	$\pi/2$ BPSK	3565.0	-0.70	1 / 36	23.02	22.32	0.171	23.00	-0.68
		3625.0	-0.70	1 / 76	23.15	22.45	0.176	23.00	-0.55
		3685.0	-0.70	1 / 1	23.06	22.36	0.172	23.00	-0.64
	QPSK	3565.0	-0.70	1 / 76	23.20	22.50	0.178	23.00	-0.50
		3625.0	-0.70	1 / 76	23.04	22.34	0.171	23.00	-0.66
		3685.0	-0.70	1 / 36	23.14	22.44	0.175	23.00	-0.56
	16-QAM	3685.0	-0.70	1 / 36	22.11	21.41	0.138	23.00	-1.59
	64-QAM	3565.0	-0.70	1 / 76	21.15	20.45	0.111	23.00	-2.55
	256-QAM	3625.0	-0.70	1 / 36	18.24	17.54	0.057	23.00	-5.46
40 MHz	$\pi/2$ BPSK	3570.0	-0.70	1 / 1	23.17	22.47	0.177	23.00	-0.53
		3625.0	-0.70	1 / 50	23.16	22.46	0.176	23.00	-0.54
		3680.0	-0.70	1 / 104	23.13	22.43	0.175	23.00	-0.57
	QPSK	3570.0	-0.70	1 / 104	23.06	22.36	0.172	23.00	-0.64
		3625.0	-0.70	1 / 50	23.20	22.50	0.178	23.00	-0.50
		3680.0	-0.70	1 / 50	22.84	22.14	0.164	23.00	-0.86
	16-QAM	3570.0	-0.70	1 / 1	22.22	21.52	0.142	23.00	-1.48
	64-QAM	3570.0	-0.70	1 / 104	21.02	20.32	0.108	23.00	-2.68
	256-QAM	3680.0	-0.70	1 / 1	18.32	17.62	0.058	23.00	-5.38

Table 7-11. EIRP Data (NR Band n48)

FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device	Page 115 of 140

V2.2 09/07/2023

Power State	Band	Bandwidth (PCC + SCC)	PCC					SCC					ULCA Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm/10MHz]	EIRP [Watts/10MHz]	EIRP Limit [dBm/10MHz]	Margin [dB]
			Modulation	UL Channel	UL Frequency [MHz]	UL # RB	UL RB Offset	Modulation	UL Channel	UL Frequency [MHz]	UL # RB	UL RB Offset						
Max	LTE B48	20MHz + 5MHz	QPSK	55340	3560.0	1	99	QPSK	55457	3571.7	1	0	18.44	-0.70	17.74	0.059	23.00	-5.26
				55990	3625.0	1	99		56107	3636.7	1	0	21.39	-0.70	20.69	0.117	23.00	-2.31
			QPSK	55640	3690.0	1	0	QPSK	56523	3678.3	1	24	17.68	-0.70	16.98	0.050	23.00	-6.02
				55990	3625	100	0		56107	3636.7	25	0	21.16	-0.70	20.46	0.116	23.00	-2.37
			16-QAM	55990	3625	100	0	16-QAM	56107	3636.7	25	0	21.15	-0.70	20.45	0.111	23.00	-2.55
				64-QAM	55990	3625	100	0	64-QAM	56107	3636.7	25	0	21.21	-0.70	20.51	0.112	23.00
Max	LTE B48	20MHz + 10MHz	QPSK	55340	3560.0	1	99	QPSK	55484	3574.4	1	0	17.12	-0.70	16.42	0.044	23.00	-6.58
				55990	3625.0	1	99		56134	3639.4	1	0	21.76	-0.70	21.06	0.128	23.00	-1.94
			QPSK	55640	3690.0	1	0	QPSK	56496	3675.6	1	49	17.19	-0.70	16.49	0.045	23.00	-6.51
				55990	3625	100	0		56134	3639.4	50	0	21.63	-0.70	20.93	0.121	23.00	-2.17
			16-QAM	55990	3625	100	0	16-QAM	56134	3639.4	50	0	21.65	-0.70	20.95	0.124	23.00	-2.05
				64-QAM	55990	3625	100	0	64-QAM	56134	3639.4	50	0	21.56	-0.70	20.86	0.122	23.00
Max	LTE B48	20MHz + 15MHz	QPSK	55340	3560.0	1	99	QPSK	55511	3577.1	1	0	17.36	-0.70	16.66	0.046	23.00	-6.34
				55990	3625.0	1	99		56161	3642.1	1	0	22.08	-0.70	21.38	0.137	23.00	-1.62
			QPSK	55640	3690.0	1	0	QPSK	56469	3672.9	1	74	17.13	-0.70	16.43	0.044	23.00	-6.57
				55990	3625	100	0		56161	3642.1	75	0	22.34	-0.70	21.64	0.146	23.00	-1.36
			16-QAM	55990	3625	100	0	16-QAM	56161	3642.1	75	0	22.21	-0.70	21.51	0.142	23.00	-1.49
				64-QAM	55990	3625	100	0	64-QAM	56161	3642.1	75	0	22.09	-0.70	21.39	0.138	23.00
Max	LTE B48	20MHz + 20MHz	QPSK	55340	3560.0	1	99	QPSK	55538	3579.8	1	0	18.58	-0.70	17.88	0.061	23.00	-5.12
				55990	3625.0	1	99		56188	3644.8	1	0	22.23	-0.70	21.53	0.142	23.00	-1.47
			QPSK	55640	3690.0	1	0	QPSK	56442	3670.2	1	99	18.66	-0.70	17.96	0.063	23.00	-5.04
				55990	3625	100	0		56188	3644.8	100	0	22.34	-0.70	21.64	0.146	23.00	-1.36
			16-QAM	55990	3625	100	0	16-QAM	56188	3644.8	100	0	22.31	-0.70	21.61	0.145	23.00	-1.39
				64-QAM	55990	3625	100	0	64-QAM	56188	3644.8	100	0	22.23	-0.70	21.53	0.142	23.00
Max	LTE B48	20MHz + 20MHz	QPSK	55340	3560.0	1	99	QPSK	55538	3579.8	1	0	18.58	-0.70	17.88	0.061	23.00	-5.12
				55990	3625.0	1	99		56188	3644.8	1	0	22.23	-0.70	21.53	0.142	23.00	-1.47
			QPSK	55640	3690.0	1	0	QPSK	56442	3670.2	1	99	18.66	-0.70	17.96	0.063	23.00	-5.04
				55990	3625	100	0		56188	3644.8	100	0	22.34	-0.70	21.64	0.146	23.00	-1.36
			16-QAM	55990	3625	100	0	16-QAM	56188	3644.8	100	0	22.31	-0.70	21.61	0.145	23.00	-1.39
				64-QAM	55990	3625	100	0	64-QAM	56188	3644.8	100	0	22.23	-0.70	21.53	0.142	23.00
Max	LTE B48	20MHz + 20MHz	QPSK	55340	3560.0	1	99	QPSK	55538	3579.8	1	0	18.58	-0.70	17.88	0.061	23.00	-5.12
				55990	3625.0	1	99		56188	3644.8	1	0	22.23	-0.70	21.53	0.142	23.00	-1.47
			QPSK	55640	3690.0	1	0	QPSK	56442	3670.2	1	99	18.66	-0.70	17.96	0.063	23.00	-5.04
				55990	3625	100	0		56188	3644.8	100	0	22.34	-0.70	21.64	0.146	23.00	-1.36
			16-QAM	55990	3625	100	0	16-QAM	56188	3644.8	100	0	22.31	-0.70	21.61	0.145	23.00	-1.39
				64-QAM	55990	3625	100	0	64-QAM	56188	3644.8	100	0	22.23	-0.70	21.53	0.142	23.00
Max	LTE B48	20MHz + 20MHz	QPSK	55340	3560.0	1	99	QPSK	55538	3579.8	1	0	18.58	-0.70	17.88	0.061	23.00	-5.12
				55990	3625.0	1	99		56188	3644.8	1	0	22.23	-0.70	21.53	0.142	23.00	-1.47
			QPSK	55640	3690.0	1	0	QPSK	56442	3670.2	1	99	18.66	-0.70	17.96	0.063	23.00	-5.04
				55990	3625	100	0		56188	3644.8	100	0	22.34	-0.70	21.64	0.146	23.00	-1.36
			16-QAM	55990	3625	100	0	16-QAM	56188	3644.8	100	0	22.31	-0.70	21.61	0.145	23.00	-1.39
				64-QAM	55990	3625	100	0	64-QAM	56188	3644.8	100	0	22.23	-0.70	21.53	0.142	23.00
Max	LTE B48	20MHz + 20MHz	QPSK	55340	3560.0	1	99	QPSK	55538	3579.8	1	0	18.58	-0.70	17.88	0.061	23.00	-5.12
				55990	3625.0	1	99		56188	3644.8	1	0	22.23	-0.70	21.53	0.142	23.00	-1.47
			QPSK	55640	3690.0	1	0	QPSK	56442	3670.2	1	99	18.66	-0.70	17.96	0.063	23.00	-5.04
				55990	3625	100	0		56188	3644.8	100	0	22.34	-0.70	21.64	0.146	23.00	-1.36
			16-QAM	55990	3625	100	0	16-QAM	56188	3644.8	100	0	22.31	-0.70	21.61	0.145	23.00	-1.39
				64-QAM	55990	3625	100	0	64-QAM	56188	3644.8	100	0	22.23	-0.70	21.53	0.142	23.00
Max	LTE B48	20MHz + 20MHz	QPSK	55340	3560.0	1	99	QPSK	55538	3579.8	1	0	18.58	-0.70	17.88	0.061	23.00	-5.12
				55990	3625.0	1	99		56188	3644.8	1	0	22.23	-0.70	21.53	0.142	23.00	-1.47
			QPSK	55640	3690.0	1	0	QPSK	56442	3670.2	1	99	18.66	-0.70	17.96	0.063	23.00	-5.04
				55990	3625	100	0		56188	3644.8	100	0	22.34	-0.70	21.64	0.146	23.00	-1.36
			16-QAM	55990	3625	100	0	16-QAM	56188	3644.8	100	0	22.31	-0.70	21.61	0.145	23.00	-1.39
				64-QAM	55990	3625	100	0	64-QAM	56188	3644.8	100	0	22.23	-0.70	21.53	0.142	23.00
Max	LTE B48	20MHz + 20MHz	QPSK	55340	3560.0	1	99	QPSK	55538	3579.8	1	0	18.58	-0.70	17.88	0.061	23.00	-5.12
				55990	3625.0	1	99		56188	3644.8	1	0	22.23	-0.70	21.53	0.142	23.00	-1.47
			QPSK	55640	3690.0	1	0	QPSK	56442	3670.2	1	99	18.66	-0.70	17.96	0.063	23.00	-5.04
				55990	3625	100	0		56188	3644.8	100	0	22.34	-0.70	21.64	0.146	23.00	-1.36
			16-QAM	55990	3625	100	0	16-QAM	56188	3644.8	100	0	22.31	-0.70	21.61	0.145	23.00	-1.39
				64-QAM	55990	3625	100	0	64-QAM	56188	3644.8	100	0	22.23	-0.70	21.53	0.142	23.00
Max	LTE B48	20MHz + 20MHz	QPSK	55340	3560.0	1	99	QPSK	55538	3579.8	1	0	18.58	-0.70	17.88	0.061	23.00	-5.12
				55990	3625.0	1	99		56188	3644.8	1	0	22.23	-0.70	21.53	0.142	23.00	-1.47
			QPSK	55640	3690.0	1	0	QPSK	56442	3670.2	1	99	18.66	-0.70	17.96	0.063	23.00	-5.04
				55990	3625	100	0		56188	3644.8	100	0	22.34	-0.70	21.64	0.146	23.00	-1.36
			16-QAM	55990	3625	100	0	16-QAM	56188	3644.8	100	0	22.31	-0.70	21.61	0.145	23.00	-1.39
				64-QAM	55990	3625	100	0	64-QAM	56188	3644.8	100	0	22.23	-0.70	21.53	0.142	23.00
Max	LTE B48	20MHz + 20MHz	QPSK	55340	3560.0	1	99	QPSK	55538	3579.8	1	0	18.58	-0.70	17.88	0.061	23.00	-5.12
				55990	3625.0	1	99		56188	3644.8	1	0	22.23	-0.70	21.53	0.142	23.00	-1.47
			QPSK	55640	3690.0	1	0	QPSK	56442	3670.2	1	99	18.66	-0.70	17.96	0.063	23.00	-5.04
				55990	3625	100	0		56188	3644.8	100	0	22.34	-0.70	21.64	0.146	23.00	-1.36
			16-QAM	55990	3625	100	0	16-QAM	56188	3644.8	100	0	22.31	-0.70	21.61	0.145	23.00	-1.39
				64-QAM	55990	3625	100	0	64-QAM	56188	3644.8	100	0	22.23	-0.70	21.53	0.142	23.00
Max	LTE B48	20MHz + 20MHz	QPSK	55340	3560.0	1	99	QPSK	55538	3579.8	1	0	18.58	-0.70	17.88	0.061	23.00	-5.12
				55990	3625.0	1	99		56188	3644.8	1	0	22.23	-0.70	21.53	0.142	23.00	-1.47
			QPSK	55640	3690.0	1	0	QPSK	56442	3670.2	1	99	18.66	-0.70	17.96	0.063	23.00	-5.04
				55990	3625	100	0		56188	3644.8	100	0	22.34	-0.70	21.64	0.146	23.00	-1.36
			16-QAM	55990	3625	100	0	16-QAM	56188	3644.8	100	0	22.31	-0.70	21.61	0.145	23.00	-1.39
				64-QAM	55990	3625	100	0	64-QAM	56188	3644.8	100	0	22.23	-0.70	21.53	0.142	23.00
Max	LTE B48	20MHz + 20MHz	QPSK	55340	3560.0	1	99	QPSK	55538	3579.8	1	0	18.58	-0.70	17.88	0.061	23.00	-5.12
				55990	3625.0	1	99		56188	3644.8	1	0	22.23	-0.70	21.53	0.142	23.00	-1.47
			QPSK	55640	3690.0	1	0	QPSK	56442	3670.2	1	99	18.66	-0.70	17.96	0.063	23.00	-5.04

Table 7-12. EIRP Data (ULCA LTE Band 48)

FCC ID: BCGA3269		PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device		Page 116 of 140

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.7 Radiated Spurious Emissions

§2.1053 §96.41(e)

Test Overview

Radiated spurious emissions measurements are performed using the field strength conversion method described in KDB 971168 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized broadband hybrid antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed while the EUT is operating at maximum power and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

ANSI C63.26-2015

TIA-603-E-2016 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq 2 \times$ span / RBW
5. Detector = RMS
6. Trace mode = Max Hold (In cases where the level is within 2dB of the limit, the final measurement is taken using triggering/gating and trace averaging.)
7. The trace was allowed to stabilize

FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device
		Page 117 of 140

V2.2 09/07/2023

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

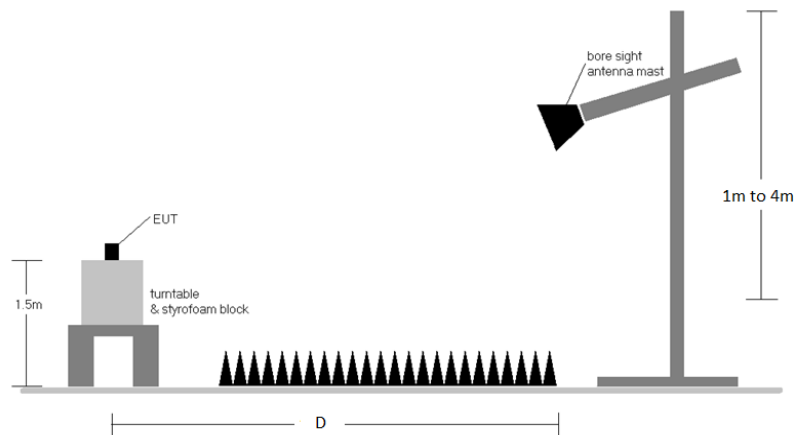


Figure 7-11. Test Instrument & Measurement Setup

Test Notes

- Field strengths are calculated using the Measurement quantity conversions in KDB 971168 D01 v03r01 Section 5.8.4.
 - $E(\text{dB}\mu\text{V/m}) = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$
 - $\text{EIRP (dBm)} = E(\text{dB}\mu\text{V/m}) + 20\log D - 104.8$; where D is the measurement distance in meters.
- The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below. 1RB config was found and reported as a worst case RB size.
- This unit was tested with its standard battery.
- The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- No significant emissions were found for below 1GHz measurement.
- Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- The "-" shown in the following RSE tables are used to denote a noise floor measurement.
- For pre-scans 1-18GHz, the RBW is set to 1MHz and VBW to 30kHz. For final measurements above 1GHz, the RBW is set to 1MHz and VBW to 3MHz when measuring with an RMS detector and max hold trace.
- Uplink carrier aggregation intra-band radiated spurious emissions measurements were evaluated for the two contiguous channels using various combinations of RB size, RB offset, modulation, and channel bandwidth. The worst case (highest) emissions were found while operating with QPSK modulation with both carriers set to transmit using 1RB.

FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device
		Page 118 of 140

V2.2 09/07/2023

7.7.1 Antenna 3a Radiated Spurious Emissions Measurements

LTE Band 48

Bandwidth (MHz):	20
Frequency (MHz):	3560.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7120.0	V	-	-	-78.86	6.69	34.83	-60.43	-40.00	-20.43
10680.0	V	248	347	-75.92	8.31	39.38	-55.87	-40.00	-15.87
14240.0	V	-	-	-82.54	13.50	37.96	-57.30	-40.00	-17.30
3253.0	H	102	202	-69.63	11.27	48.64	-46.62	-40.00	-6.62
3867.0	V	266	153	-72.14	13.20	48.06	-47.20	-40.00	-7.20

Table 7-13. Radiated Spurious Data (LTE Band 48 – Low Channel)

Bandwidth (MHz):	20
Frequency (MHz):	3625.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7250.0	V	-	-	-78.93	6.57	34.64	-60.61	-40.00	-20.61
10875.0	V	-	-	-80.31	9.17	35.86	-59.40	-40.00	-19.40
14500.0	V	-	-	-83.46	13.74	37.28	-57.98	-40.00	-17.98
3318.0	V	307	152	-71.45	11.57	47.12	-48.14	-40.00	-8.14
3932.0	V	282	159	-71.63	13.19	48.56	-46.69	-40.00	-6.69

Table 7-14. Radiated Spurious Data (LTE Band 48 – Mid Channel)

Bandwidth (MHz):	20
Frequency (MHz):	3690.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 50


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7380.0	V	-	-	-78.47	6.05	34.58	-60.68	-40.00	-20.68
11070.0	V	-	-	-80.31	8.85	35.54	-59.72	-40.00	-19.72
14760.0	V	-	-	-83.29	14.84	38.55	-56.70	-40.00	-16.70
3383.0	V	353	150	-71.23	11.50	47.27	-47.99	-40.00	-7.99
3998.0	V	258	148	-71.57	13.43	48.86	-46.40	-40.00	-6.40

Table 7-15. Radiated Spurious Data (LTE Band 48 – High Channel)


FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device
		Page 119 of 140

V2.2 09/07/2023

ULCA LTE Band 48

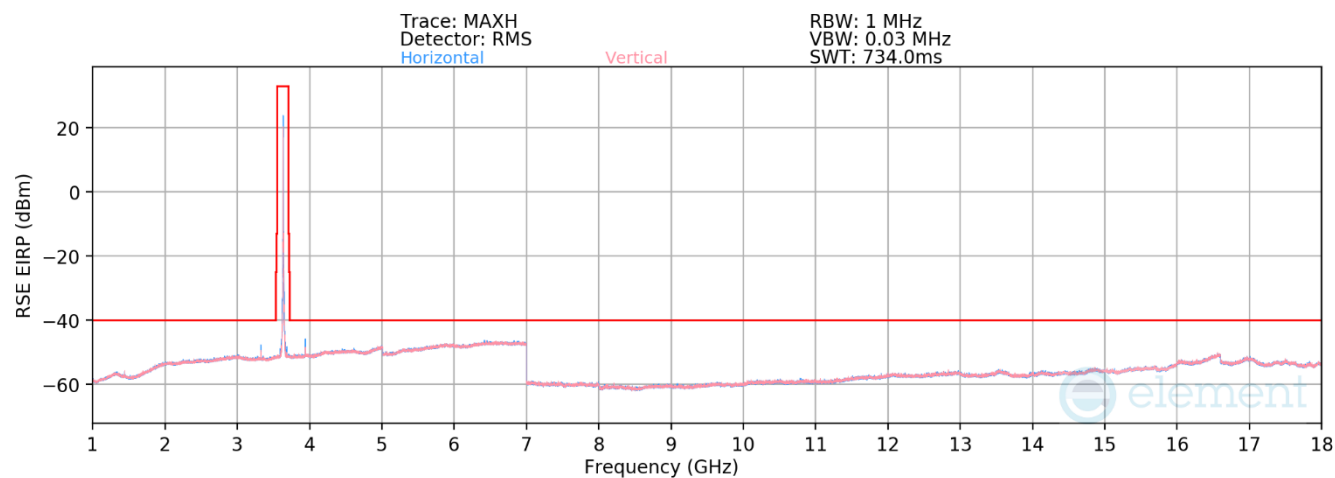

Plot 7-162. Radiated Spurious Plot 1 – 18GHz (ULCA LTE Band 48)

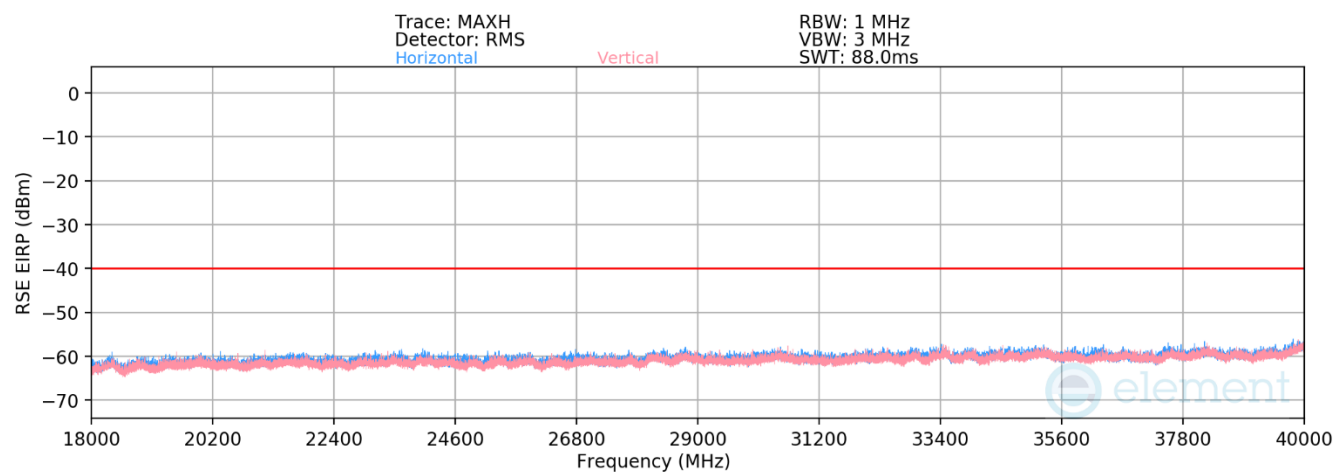

Plot 7-163. Radiated Spurious Plot 18 – 40GHz (ULCA LTE Band 48)

FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device
		Page 120 of 140

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3560.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3579.8
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7120.0	V	-	-	-78.91	6.59	34.68	-60.57	-40.00	-20.57
10680.0	V	-	-	-80.33	8.44	35.11	-60.15	-40.00	-20.15
14240.0	V	-	-	-82.56	13.44	37.88	-57.38	-40.00	-17.38
3262.0	H	106	218	-71.73	13.29	48.56	-46.70	-40.00	-6.70
3876.0	V	311	152	-73.93	14.76	47.83	-47.43	-40.00	-7.43

Table 7-16. Radiated Spurious Data (ULCA LTE Band 48– Low Channel)

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3625.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3644.8
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7250.0	V	-	-	-78.56	6.33	34.78	-60.48	-40.00	-20.48
10875.0	V	-	-	-80.88	9.44	35.56	-59.70	-40.00	-19.70
14500.0	V	-	-	-83.01	13.76	37.74	-57.51	-40.00	-17.51
3327.0	H	106	205	-71.30	13.34	49.04	-46.22	-40.00	-6.22
3941.0	V	263	156	-72.81	15.06	49.25	-46.01	-40.00	-6.01

Table 7-17. Radiated Spurious Data (ULCA LTE Band 48– Mid Channel)

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3690.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3670.2
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7380.0	V	-	-	-78.47	6.16	34.69	-60.57	-40.00	-20.57
11070.0	V	-	-	-80.46	8.99	35.53	-59.73	-40.00	-19.73
14760.0	V	-	-	-83.17	14.57	38.41	-56.85	-40.00	-16.85
3374.0	H	113	200	-69.75	11.51	48.76	-46.49	-40.00	-6.49
3988.0	H	119	197	-71.27	13.46	49.19	-46.07	-40.00	-6.07

Table 7-18. Radiated Spurious Data (ULCA LTE Band 48– High Channel)

FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device
		Page 121 of 140

V2.2 09/07/2023

NR Band n48

Bandwidth (MHz):	40
Frequency (MHz):	3570.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7120.0	H	-	-	-79.22	6.69	34.47	-60.79	-40.00	-20.79
10680.0	H	-	-	-80.48	8.56	35.08	-60.18	-40.00	-20.18
14240.0	H	-	-	-83.27	13.48	37.21	-58.04	-40.00	-18.04

Table 7-19. Radiated Spurious Data (NR Band n48 – Low Channel)

Bandwidth (MHz):	40
Frequency (MHz):	3625.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7250.0	H	-	-	-79.03	6.51	34.48	-60.78	-40.00	-20.78
10875.0	H	-	-	-80.61	9.16	35.55	-59.71	-40.00	-19.71
14500.0	H	-	-	-83.21	13.70	37.48	-57.77	-40.00	-17.77

Table 7-20. Radiated Spurious Data (NR Band n48 – Mid Channel)

Bandwidth (MHz):	40
Frequency (MHz):	3680.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7380.0	H	-	-	-78.58	6.14	34.55	-60.70	-40.00	-20.70
11070.0	H	-	-	-80.89	9.02	35.12	-60.14	-40.00	-20.14
14760.0	H	-	-	-83.70	14.57	37.88	-57.38	-40.00	-17.38

Table 7-21. Radiated Spurious Data (NR Band n48 – High Channel)

FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device
		Page 122 of 140

V2.2 09/07/2023

7.7.2 Antenna 2 Radiated Spurious Emissions Measurements

LTE Band 48

Bandwidth (MHz):	20
Frequency (MHz):	3560.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7120.0	V	-	-	-78.86	6.65	34.79	-60.47	-40.00	-20.47
10680.0	V	-	-	-80.54	9.08	35.54	-59.72	-40.00	-19.72
14240.0	V	-	-	-83.02	13.81	37.79	-57.46	-40.00	-17.46
3253.0	H	165	330	-71.92	13.30	48.38	-46.87	-40.00	-6.87
3867.0	H	111	340	-73.21	14.77	48.56	-46.70	-40.00	-6.70

Table 7-22. Radiated Spurious Data (LTE Band 48 – Low Channel)

Bandwidth (MHz):	20
Frequency (MHz):	3625.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7250.0	V	-	-	-78.84	6.57	34.73	-60.52	-40.00	-20.52
10875.0	V	-	-	-80.30	9.25	35.95	-59.31	-40.00	-19.31
14500.0	V	-	-	-83.24	13.70	37.46	-57.80	-40.00	-17.80
3318.0	V	306	8	-69.45	11.57	49.12	-46.14	-40.00	-6.14
3932.0	V	153	310	-75.59	15.12	46.53	-48.72	-40.00	-8.72

Table 7-23. Radiated Spurious Data (LTE Band 48 – Mid Channel)

Bandwidth (MHz):	20
Frequency (MHz):	3690.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7380.0	V	-	-	-78.55	6.05	34.50	-60.75	-40.00	-20.75
11070.0	V	-	-	-80.44	9.02	35.58	-59.68	-40.00	-19.68
14760.0	V	-	-	-83.20	14.84	38.64	-56.61	-40.00	-16.61
3383.0	V	282	15	-70.03	11.50	48.47	-46.79	-40.00	-6.79
3998.0	V	330	17	-72.13	13.43	48.30	-46.96	-40.00	-6.96

Table 7-24. Radiated Spurious Data (LTE Band 48 – High Channel)

FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device
		Page 123 of 140

V2.2 09/07/2023

ULCA LTE Band 48

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3560.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3579.8
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7120.0	V	-	-	-78.65	6.59	34.95	-60.31	-40.00	-20.31
10680.0	V	-	-	-80.31	8.44	35.13	-60.13	-40.00	-20.13
14240.0	V	-	-	-82.77	13.44	37.67	-57.59	-40.00	-17.59
3262.0	H	140	326	-72.16	13.29	48.13	-47.13	-40.00	-7.13
3876.0	H	115	328	-73.46	14.75	48.29	-46.96	-40.00	-6.96

Table 7-25. Radiated Spurious Data (ULCA LTE Band 48– Low Channel)

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3625.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3644.8
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7250.0	V	-	-	-78.26	6.33	35.07	-60.18	-40.00	-20.18
10875.0	V	-	-	-80.62	9.16	35.54	-59.72	-40.00	-19.72
14500.0	V	-	-	-82.82	13.63	37.81	-57.45	-40.00	-17.45
3327.0	H	115	334	-69.62	11.59	48.97	-46.29	-40.00	-6.29
3941.0	H	109	339	-71.56	13.20	48.64	-46.61	-40.00	-6.61

Table 7-26. Radiated Spurious Data (ULCA LTE Band 48– Mid Channel)

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3690.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3670.2
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7380.0	V	-	-	-78.57	6.16	34.59	-60.67	-40.00	-20.67
11070.0	V	-	-	-80.50	8.99	35.49	-59.76	-40.00	-19.76
14760.0	V	-	-	-83.03	14.57	38.54	-56.71	-40.00	-16.71
3374.0	H	108	334	-72.37	13.35	47.98	-47.28	-40.00	-7.28
3988.0	H	145	332	-73.88	15.34	48.46	-46.79	-40.00	-6.79

Table 7-27. Radiated Spurious Data (ULCA LTE Band 48– High Channel)

FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device
		Page 124 of 140

V2.2 09/07/2023

NR Band n48

Bandwidth (MHz):	40
Frequency (MHz):	3570.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7120.0	H	-	-	-79.01	6.56	34.55	-60.71	-40.00	-20.71
10680.0	H	-	-	-80.32	8.42	35.11	-60.15	-40.00	-20.15
14240.0	H	-	-	-83.04	13.48	37.44	-57.82	-40.00	-17.82

Table 7-28. Radiated Spurious Data (NR Band n48 – Low Channel)

Bandwidth (MHz):	40
Frequency (MHz):	3625.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7250.0	H	-	-	-78.70	6.48	34.78	-60.48	-40.00	-20.48
10875.0	H	-	-	-80.15	9.25	36.10	-59.16	-40.00	-19.16
14500.0	H	-	-	-83.39	13.74	37.34	-57.91	-40.00	-17.91

Table 7-29. Radiated Spurious Data (NR Band n48 – Mid Channel)

Bandwidth (MHz):	40
Frequency (MHz):	3680.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7380.0	H	-	-	-78.24	6.05	34.82	-60.44	-40.00	-20.44
11070.0	H	-	-	-80.61	9.01	35.40	-59.86	-40.00	-19.86
14760.0	H	-	-	-83.39	14.57	38.18	-57.08	-40.00	-17.08

Table 7-30. Radiated Spurious Data (NR Band n48 – High Channel)

FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device
		Page 125 of 140

V2.2 09/07/2023

7.7.3 Antenna 4 Radiated Spurious Emissions Measurements

LTE Band 48

Bandwidth (MHz):	20
Frequency (MHz):	3560.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7120.0	V	-	-	-78.80	6.57	34.77	-60.49	-40.00	-20.49
10680.0	V	-	-	-80.62	9.08	35.46	-59.80	-40.00	-19.80
14240.0	V	-	-	-82.91	13.72	37.81	-57.45	-40.00	-17.45
3253.0	H	277	51	-76.41	13.30	43.89	-51.36	-40.00	-11.36
3867.0	H	125	154	-75.39	14.77	46.38	-48.88	-40.00	-8.88

Table 7-31. Radiated Spurious Data (LTE Band 48 – Low Channel)

Bandwidth (MHz):	20
Frequency (MHz):	3625.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7250.0	V	-	-	-78.76	6.48	34.72	-60.54	-40.00	-20.54
10875.0	V	-	-	-80.52	9.16	35.63	-59.62	-40.00	-19.62
14500.0	V	-	-	-83.55	13.89	37.34	-57.92	-40.00	-17.92
3318.0	H	121	44	-73.32	13.32	47.00	-48.26	-40.00	-8.26
3932.0	H	153	159	-74.38	15.12	47.74	-47.51	-40.00	-7.51

Table 7-32. Radiated Spurious Data (LTE Band 48 – Mid Channel)

Bandwidth (MHz):	20
Frequency (MHz):	3690.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7380.0	V	-	-	-78.26	6.16	34.89	-60.36	-40.00	-20.36
11070.0	V	-	-	-80.55	8.85	35.29	-59.96	-40.00	-19.96
14760.0	V	-	-	-83.40	14.84	38.44	-56.82	-40.00	-16.82
3383.0	V	344	197	-69.52	11.50	48.98	-46.28	-40.00	-6.28
3997.0	V	341	199	-71.32	13.43	49.11	-46.15	-40.00	-6.15

Table 7-33. Radiated Spurious Data (LTE Band 48 – High Channel)

FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device
		Page 126 of 140

V2.2 09/07/2023

ULCA LTE Band 48

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3560.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3579.8
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7120.0	V	-	-	-78.74	6.59	34.85	-60.41	-40.00	-20.41
10680.0	V	-	-	-80.46	8.64	35.18	-60.08	-40.00	-20.08
14240.0	V	-	-	-82.91	13.51	37.59	-57.66	-40.00	-17.66
3262.0	V	291	212	-72.51	13.29	47.78	-47.48	-40.00	-7.48
3876.0	H	118	163	-73.46	14.75	48.29	-46.96	-40.00	-6.96

Table 7-34. Radiated Spurious Data (ULCA LTE Band 48– Low Channel)

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3625.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3644.8
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7250.0	V	-	-	-78.68	6.38	34.70	-60.56	-40.00	-20.56
10875.0	V	-	-	-80.20	9.16	35.96	-59.30	-40.00	-19.30
14500.0	V	-	-	-83.07	13.76	37.68	-57.57	-40.00	-17.57
3327.0	H	117	62	-71.51	11.55	47.04	-48.22	-40.00	-8.22
3941.0	H	143	167	-71.97	13.18	48.21	-47.04	-40.00	-7.04

Table 7-35. Radiated Spurious Data (ULCA LTE Band 48– Mid Channel)

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3690.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3670.2
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7380.0	V	-	-	-78.74	6.26	34.51	-60.74	-40.00	-20.74
11070.0	V	-	-	-80.44	8.99	35.55	-59.71	-40.00	-19.71
14760.0	V	-	-	-83.38	14.57	38.19	-57.06	-40.00	-17.06
3374.0	H	103	160	-69.47	11.50	49.03	-46.23	-40.00	-6.23
3988.0	H	108	148	-73.40	15.34	48.94	-46.31	-40.00	-6.31

Table 7-36. Radiated Spurious Data (ULCA LTE Band 48– High Channel)

FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device
		Page 127 of 140

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

NR Band n48

Bandwidth (MHz):	40
Frequency (MHz):	3570.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7120.0	H	-	-	-78.94	6.59	34.65	-60.61	-40.00	-20.61
10680.0	H	-	-	-80.42	8.64	35.22	-60.04	-40.00	-20.04
14240.0	H	-	-	-83.57	13.56	36.99	-58.27	-40.00	-18.27

Table 7-37. Radiated Spurious Data (NR Band n48 – Low Channel)

Bandwidth (MHz):	40
Frequency (MHz):	3625.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7250.0	H	-	-	-78.96	6.51	34.55	-60.71	-40.00	-20.71
10875.0	H	-	-	-80.26	9.25	35.99	-59.27	-40.00	-19.27
14500.0	H	-	-	-83.22	13.70	37.48	-57.78	-40.00	-17.78

Table 7-38. Radiated Spurious Data (NR Band n48 – Mid Channel)

Bandwidth (MHz):	40
Frequency (MHz):	3680.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7380.0	H	-	-	-78.37	6.14	34.77	-60.49	-40.00	-20.49
11070.0	H	-	-	-80.39	9.01	35.62	-59.64	-40.00	-19.64
14760.0	H	-	-	-83.47	14.37	37.90	-57.36	-40.00	-17.36


Table 7-39. Radiated Spurious Data (NR Band n48 – High Channel)

FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device
		Page 128 of 140


V2.2 09/07/2023

7.7.4 Antenna 1a Radiated Spurious Emissions Measurements

LTE Band 48

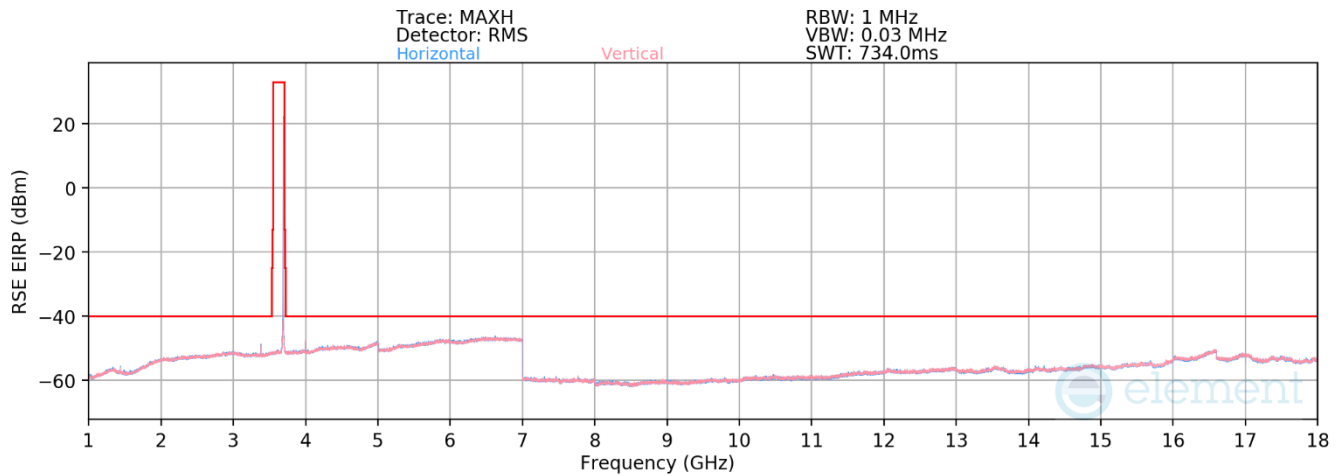

Plot 7-164. Radiated Spurious Plot 1 – 18GHz (LTE Band 48)

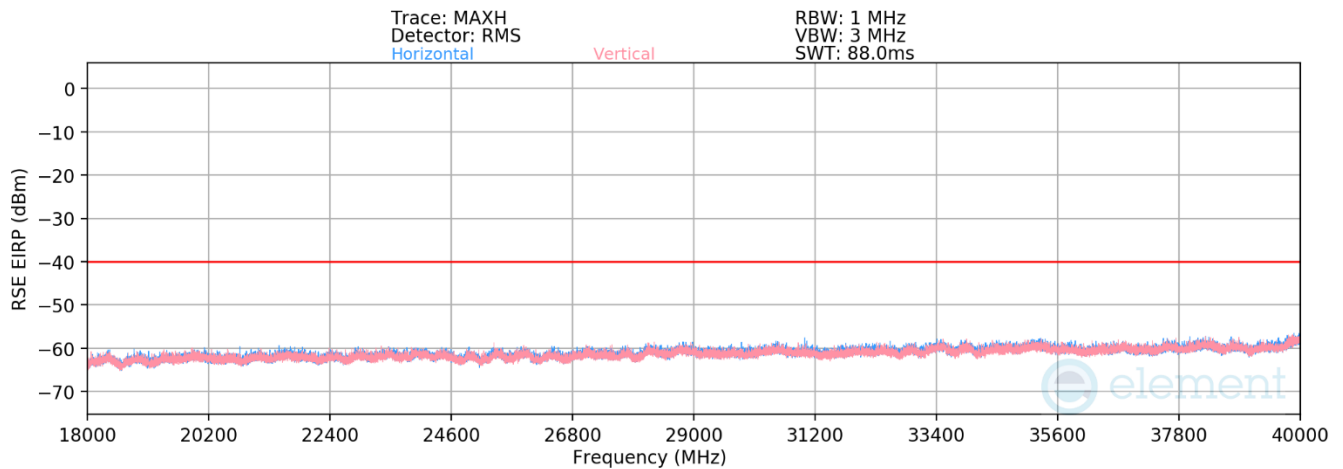

Plot 7-165. Radiated Spurious Plot 18 – 40GHz (LTE Band 48)

FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device
		Page 129 of 140

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Bandwidth (MHz):	20
Frequency (MHz):	3560.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7120.0	V	-	-	-78.83	6.68	34.85	-60.40	-40.00	-20.40
10680.0	V	-	-	-80.00	8.23	35.22	-60.03	-40.00	-20.03
14240.0	V	-	-	-82.63	13.49	37.87	-57.39	-40.00	-17.39
3253.0	H	270	110	-72.31	13.30	47.99	-47.26	-40.00	-7.26
3867.0	H	308	66	-74.04	14.77	47.73	-47.53	-40.00	-7.53

Table 7-40. Radiated Spurious Data (LTE Band 48 – Low Channel)

Bandwidth (MHz):	20
Frequency (MHz):	3625.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7250.0	V	-	-	-78.74	6.48	34.74	-60.52	-40.00	-20.52
10875.0	V	-	-	-80.63	9.44	35.80	-59.45	-40.00	-19.45
14500.0	V	-	-	-83.51	13.89	37.37	-57.88	-40.00	-17.88
3317.6	H	304	55	-72.00	13.32	48.32	-46.94	-40.00	-6.94
3932.0	H	154	60	-73.18	15.12	48.94	-46.31	-40.00	-6.31

Table 7-41. Radiated Spurious Data (LTE Band 48 – Mid Channel)

Bandwidth (MHz):	20
Frequency (MHz):	3690.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7380.0	V	-	-	-78.33	6.05	34.72	-60.54	-40.00	-20.54
11070.0	V	-	-	-80.35	8.85	35.49	-59.76	-40.00	-19.76
14760.0	V	-	-	-83.29	14.84	38.55	-56.71	-40.00	-16.71
3383.0	H	231	110	-71.01	13.26	49.25	-46.01	-40.00	-6.01
3997.0	H	168	55	-73.51	15.40	48.89	-46.37	-40.00	-6.37

Table 7-42. Radiated Spurious Data (LTE Band 48 – High Channel)

FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device
		Page 130 of 140

V2.2 09/07/2023

ULCA LTE Band 48

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3560.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3579.8
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7120.0	V	-	-	-78.83	6.56	34.72	-60.53	-40.00	-20.53
10680.0	V	-	-	-80.40	8.64	35.25	-60.01	-40.00	-20.01
14240.0	V	-	-	-82.89	13.48	37.59	-57.67	-40.00	-17.67
3262.0	H	162	118	-72.25	13.29	48.04	-47.22	-40.00	-7.22
3876.0	H	296	70	-73.55	14.75	48.20	-47.05	-40.00	-7.05

Table 7-43. Radiated Spurious Data (ULCA LTE Band 48– Low Channel)

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3625.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3644.8
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7250.0	V	-	-	-78.58	6.51	34.93	-60.33	-40.00	-20.33
10875.0	V	-	-	-80.87	9.44	35.57	-59.69	-40.00	-19.69
14500.0	V	-	-	-83.13	13.76	37.63	-57.63	-40.00	-17.63
3326.0	H	180	110	-72.32	13.34	48.02	-47.24	-40.00	-7.24
3941.0	H	269	68	-73.42	15.06	48.64	-46.61	-40.00	-6.61

Table 7-44. Radiated Spurious Data (ULCA LTE Band 48– Mid Channel)

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3690.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3670.2
SCC RB / Offset:	1 / 0
Modulation Signal:	QPSK


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7380.0	V	-	-	-78.40	6.05	34.66	-60.60	-40.00	-20.60
11070.0	V	-	-	-80.50	9.02	35.52	-59.74	-40.00	-19.74
14760.0	V	-	-	-83.46	14.57	38.11	-57.15	-40.00	-17.15
3374.0	V	120	96	-72.29	13.35	48.06	-47.20	-40.00	-7.20
3988.0	H	293	65	-71.21	13.33	49.12	-46.14	-40.00	-6.14

Table 7-45. Radiated Spurious Data (ULCA LTE Band 48– High Channel)


FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device
		Page 131 of 140

V2.2 09/07/2023

NR Band n48

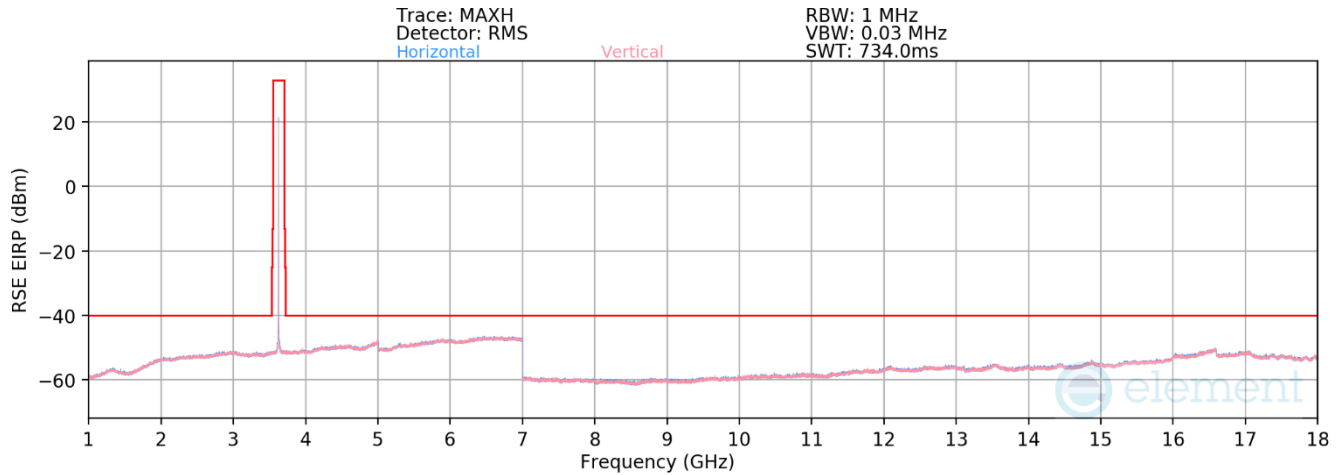

Plot 7-166. Radiated Spurious Plot 1 – 18GHz (NR Band n48)

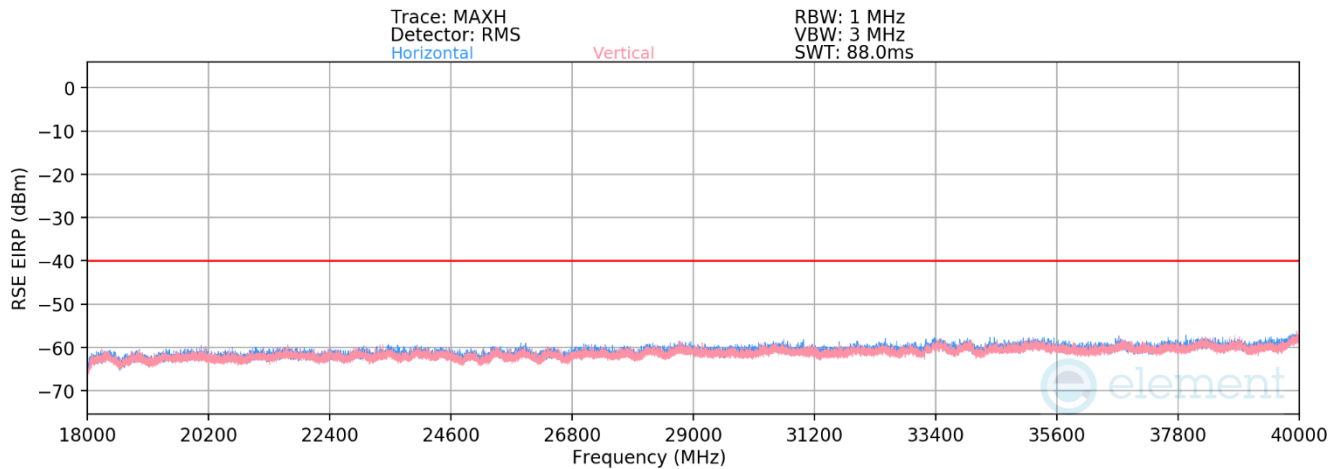

Plot 7-167. Radiated Spurious Plot 18 – 40GHz (NR Band n48)

FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device
		Page 132 of 140

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Bandwidth (MHz):	40
Frequency (MHz):	3570.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7120.0	V	-	-	-79.02	6.59	34.58	-60.68	-40.00	-20.68
10680.0	V	-	-	-80.54	8.64	35.10	-60.16	-40.00	-20.16
14240.0	V	-	-	-83.25	13.56	37.31	-57.94	-40.00	-17.94

Table 7-46. Radiated Spurious Data (NR Band n48 – Low Channel)

Bandwidth (MHz):	40
Frequency (MHz):	3625.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7250.0	V	-	-	-78.85	6.48	34.63	-60.62	-40.00	-20.62
10875.0	V	-	-	-80.47	9.44	35.97	-59.29	-40.00	-19.29
14500.0	V	-	-	-83.08	13.70	37.62	-57.64	-40.00	-17.64

Table 7-47. Radiated Spurious Data (NR Band n48 – Mid Channel)

Bandwidth (MHz):	40
Frequency (MHz):	3680.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
7380.0	V	-	-	-78.54	6.05	34.51	-60.75	-40.00	-20.75
11070.0	V	-	-	-80.60	9.01	35.41	-59.85	-40.00	-19.85
14760.0	V	-	-	-83.63	14.57	37.94	-57.32	-40.00	-17.32

Table 7-48. Radiated Spurious Data (NR Band n48 – High Channel)

FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device
		Page 133 of 140

V2.2 09/07/2023

7.8 Frequency Stability / Temperature Variation

§2.1055

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015 and TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 96, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure Used

ANSI C63.26-2015

TIA-603-E-2016

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

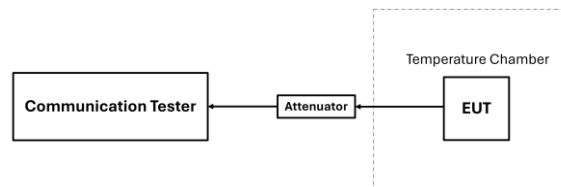


Figure 7-12. LTE Test Instrument & Measurement Setup




Figure 7-13. FR1 Test Instrument & Measurement Setup

Test Notes

All ports were tested and only the worst case data were reported.

FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device
		Page 134 of 140

V2.2 09/07/2023

Frequency Stability / Temperature Variation

LTE Band 48				
		Operating Band Lower Boundary (GHz)		3.550
		Ref. Voltage (VDC):		3.80
Voltage (%)	Power (VDC)	Temp (°C)	Measured Freq. (GHz)	Freq. Delta from Operating Range (GHz)
100 %	3.80	- 30	3.55072350	-0.00072350
		- 20	3.55038451	-0.00038451
		- 10	3.55088592	-0.00088592
		0	3.55003455	-0.00003455
		+ 10	3.55005547	-0.00005547
		+ 20 (Ref)	3.55092675	-0.00092675
		+ 30	3.55067702	-0.00067702
		+ 40	3.55073199	-0.00073199
		+ 50	3.55009339	-0.00009339
Battery Endpoint	3.40	+ 20	3.55049137	-0.00049137

Table 49. LTE Band 48 Lower Boundary Frequency Stability Data

LTE Band 48				
		Operating Band Upper Boundary (GHz)		3.700
		Ref. Voltage (VDC):		3.80
Voltage (%)	Power (VDC)	Temp (°C)	Measured Freq. (GHz)	Freq. Delta from Operating Range (GHz)
100 %	3.80	- 30	3.69982320	-0.00017680
		- 20	3.69911304	-0.00088696
		- 10	3.69997650	-0.00002350
		0	3.69904162	-0.00095838
		+ 10	3.69940317	-0.00059683
		+ 20 (Ref)	3.69916574	-0.00083426
		+ 30	3.69902711	-0.00097289
		+ 40	3.69959832	-0.00040168
		+ 50	3.69946019	-0.00053981
Battery Endpoint	3.40	+ 20	3.69944978	-0.00055022

Table 50. LTE Band 48 Upper Boundary Frequency Stability Data

FCC ID: BCGA3269		PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device		Page 135 of 140

V2.2 09/07/2023

Frequency Stability / Temperature Variation

NR Band n48				
		Operating Band Lower Boundary (GHz)	3.550	
		Ref. Voltage (VDC):	3.80	
Voltage (%)	Power (VDC)	Temp (°C)	Measured Freq. (GHz)	Freq. Delta from Operating Range (GHz)
100 %	3.80	- 30	3.55088796	-0.00088796
		- 20	3.55073895	-0.00073895
		- 10	3.55038924	-0.00038924
		0	3.55025019	-0.00025019
		+ 10	3.55073864	-0.00073864
		+ 20 (Ref)	3.55032108	-0.00032108
		+ 30	3.55014203	-0.00014203
		+ 40	3.55027118	-0.00027118
		+ 50	3.55012979	-0.00012979
Battery Endpoint	3.40	+ 20	3.55043089	-0.00043089

Table 51. NR Band n48 Lower Boundary Frequency Stability Data

NR Band n48				
		Operating Band Upper Boundary (GHz)	3.700	
		Ref. Voltage (VDC):	3.80	
Voltage (%)	Power (VDC)	Temp (°C)	Measured Freq. (GHz)	Freq. Delta from Operating Range (GHz)
100 %	3.80	- 30	3.69993086	-0.00006914
		- 20	3.69966166	-0.00033834
		- 10	3.69931635	-0.00068365
		0	3.69982882	-0.00017118
		+ 10	3.69957333	-0.00042667
		+ 20 (Ref)	3.69927010	-0.00072990
		+ 30	3.69958780	-0.00041220
		+ 40	3.69946304	-0.00053696
		+ 50	3.69946130	-0.00053870
Battery Endpoint	3.40	+ 20	3.69953645	-0.00046355

Table 52. NR Band n48 Upper Boundary Frequency Stability Data

FCC ID: BCGA3269			PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device		Page 136 of 140

V2.2 09/07/2023

7.9 End User Device Additional Requirement (CBSD Protocol)

§96.47

Test Overview and Limit

End user device additional requirements (CBSD Protocol) are tested per the test procedures listed below. During testing, the EUT is connected to a certified CBSDs (AirSpan FCC ID(s): PIDAV1901 and PIDAV1500) as a companion device to show compliance with Part 96.47.

End User Devices may operate only if they can positively receive and decode an authorization signal transmitted by a CBSD, including the frequencies and power limits for their operation.

An End User Device must discontinue operations, change frequencies, or change its operational power level within 10 seconds of receiving instructions from its associated CBSD.

Test Procedure Used

KDB 940660 D01 v03

WINNF-TS-0122 v1.0.2

Test Setup/Method

The EUT was connected via an RF cable to a certified CBSD and spectrum analyzer. The following procedure is performed by applying WINNF-TS-0122 CBRS CBSD Test Specification.

1. Run#1:
 - a. Setup WINNF.PT.C.HBT.1 with 3615 – 3635MHz.
 - b. Enable AP service from Airspan Cloud Platform.
 - c. Check EUT Tx frequency.
 - d. Disable AP service from Airspan Cloud Platform and check EUT stop transmission within 10s.
2. Run#2:
 - a. Setup WINNF.PT.C.HBT.1 with 3615MHz – 3635MHz.
 - b. Enable AP service from Airspan Cloud Platform.
 - c. Check EUT Tx frequency.
 - d. Disable AP service from Airspan Cloud Platform and check EUT stop transmission within 10s.

Test Notes


The EUT is an End User Device.

FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device
		Page 137 of 140


V2.2 09/07/2023

Run#1 LTE-B48:

- Tx Frequency Set: 3615 – 3635MHz
- MaxEIRP Set: 10dBm/MHz

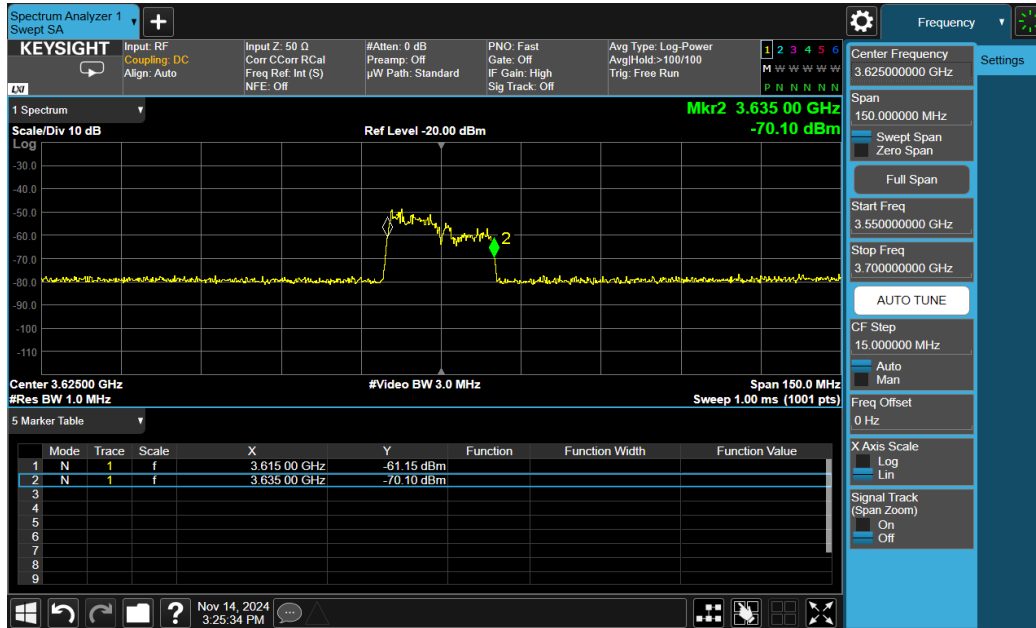

Plot 7-168. Run#1 End User Device Frequency of Operations

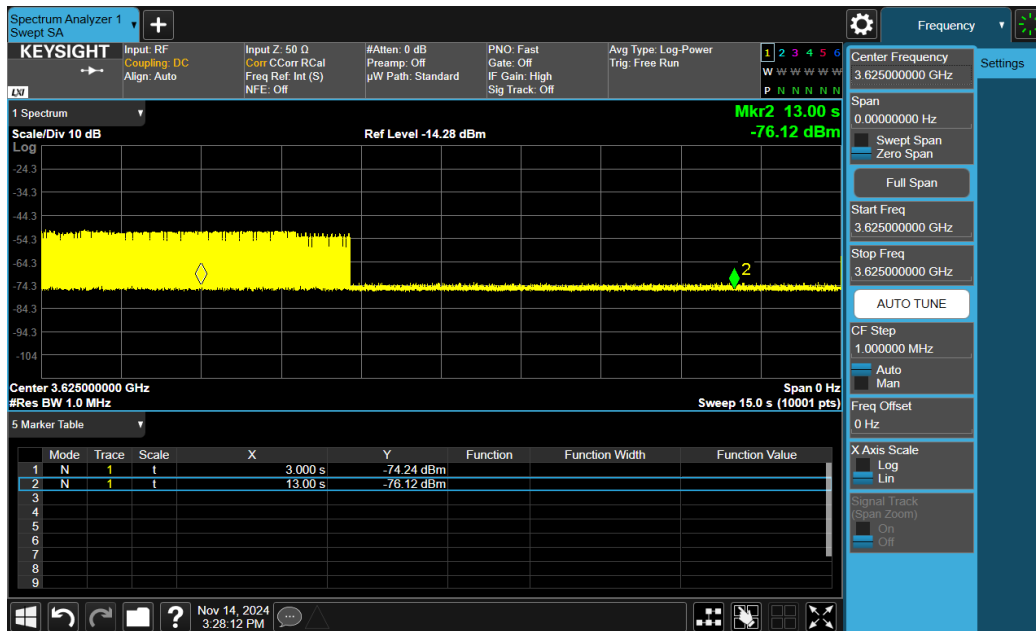

Plot 7-169. Run#1 End User Device Discontinues Operations within 10s

Note:

Marker 1: CBSD sends instructions to discontinue LTE operations.
 Marker 2: 10 seconds elapsed time from CBSD sending instructions to EUT.


FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device
		Page 138 of 140

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


Run#2 FR1-n48:

- Tx Frequency Set: 3615 – 3635MHz
- MaxEIRP Set: 10dBm/MHz

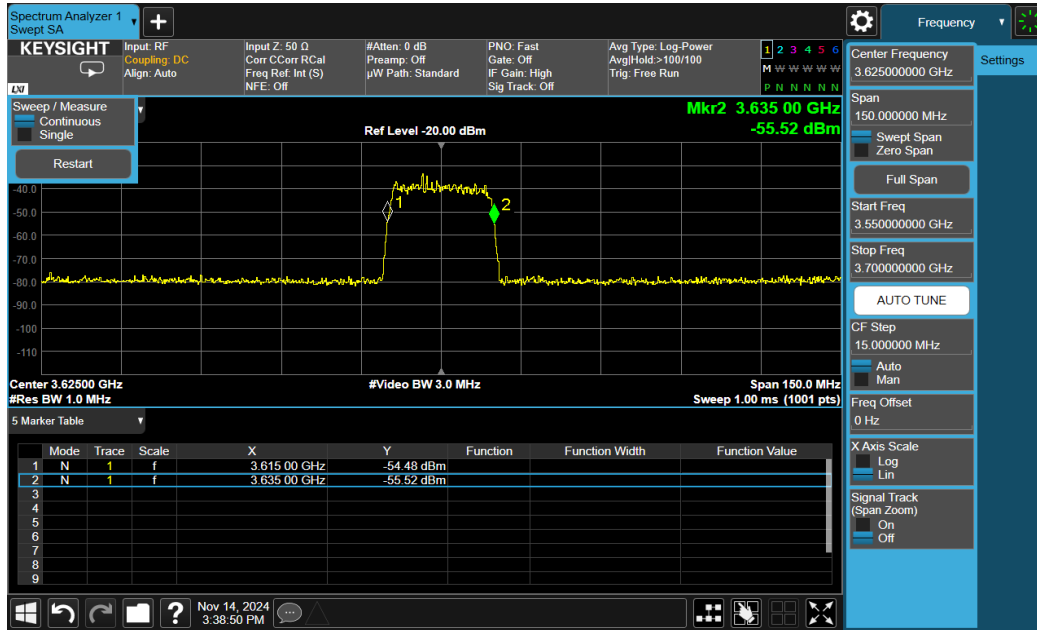

Plot 7-170. Run#2 End User Device Frequency of Operations

S

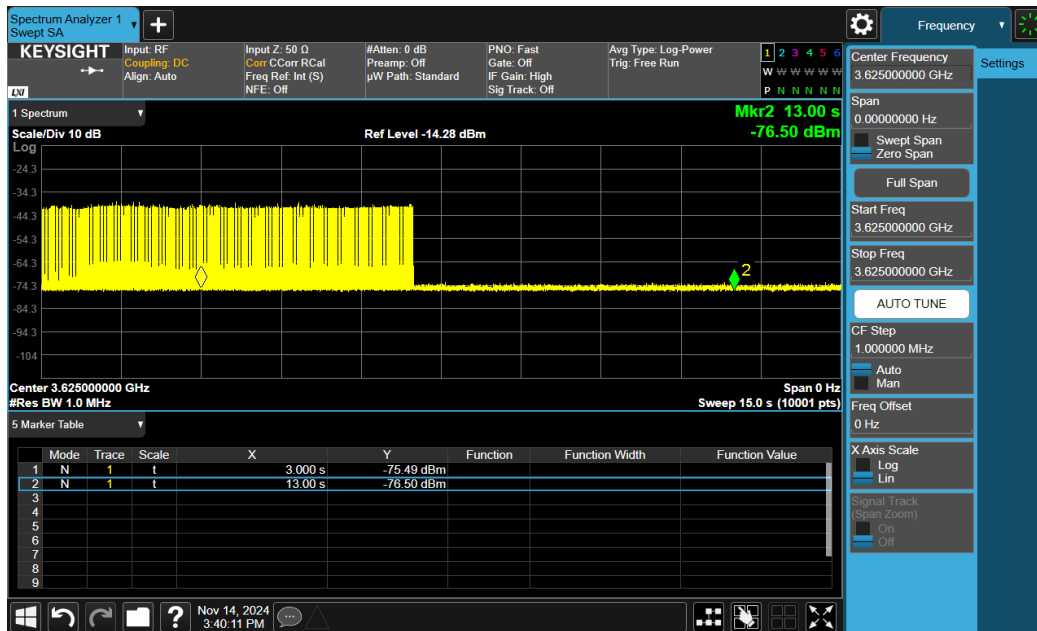

Plot 7-171. Run#2 End User Device Discontinues Operations within 10s

Note:

Marker 1: CBSD sends instructions to discontinue FR1 operations.
 Marker 2: 10 seconds elapsed time from CBSD sending instructions to EUT.

FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device
		Page 139 of 140

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the Apple **Tablet Device FCC ID: BCGA3269** complies with all the End User Device requirements of Part 96 of the FCC Rules.

FCC ID: BCGA3269	 PART 96 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2410210075-13-R1.BCG	Test Dates: 7/1/2024-12/27/2024	EUT Type: Tablet Device
		Page 140 of 140

V2.2 09/07/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.