






Plot 7-234. In-Band Emission Plot Antenna 5T (40MHz 802.11ax RU242 (UNII Band 7) – Ch. 155)

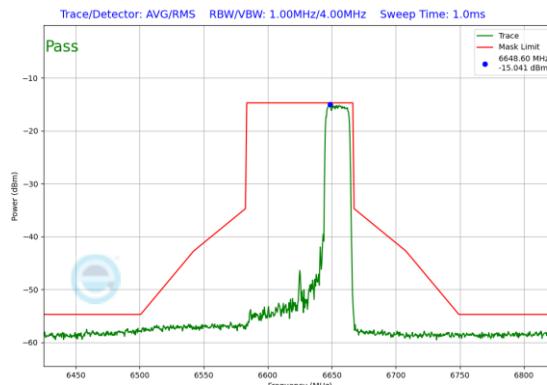


Plot 7-237. In-Band Emission Plot Antenna 1b (80MHz 802.11ax RU242 (UNII Band 7) – Ch. 135)

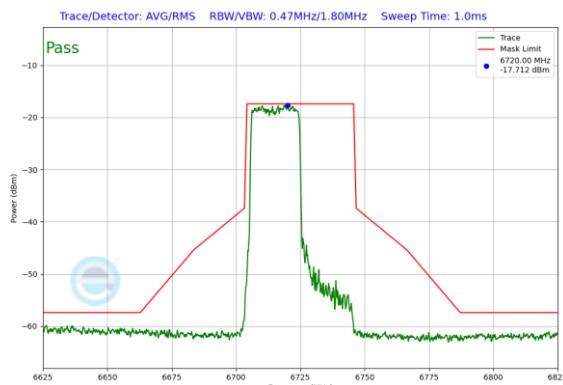


Plot 7-235. In-Band Emission Plot Antenna 1b (40MHz 802.11ax RU242 (UNII Band 7) – Ch. 155)

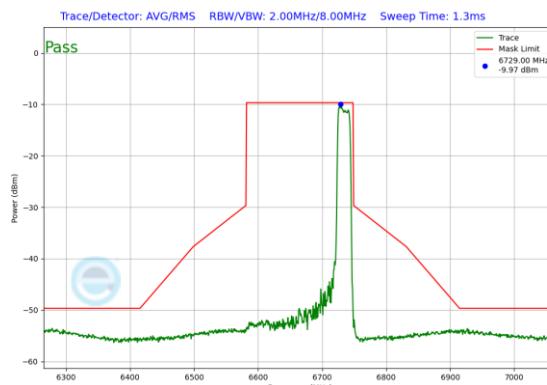

Plot 7-238. In-Band Emission Plot Antenna 5T (160MHz 802.11ax RU242 (UNII Band 7) – Ch. 143)

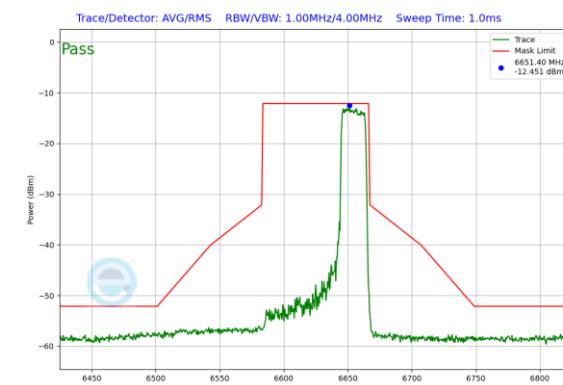


Plot 7-236. In-Band Emission Plot Antenna 5T (80MHz 802.11ax RU242 (UNII Band 7) – Ch. 135)

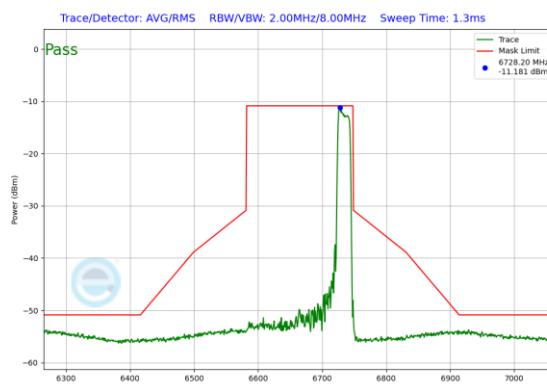


Plot 7-239. In-Band Emission Plot Antenna 1b (160MHz 802.11ax RU242 (UNII Band 7) – Ch. 143)


FCC ID: BCGA3269	 element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-26-R1.BCG	Test Dates: 10/25/2024 - 1/15/2025	EUT Type: Tablet Device	Page 123 of 209	

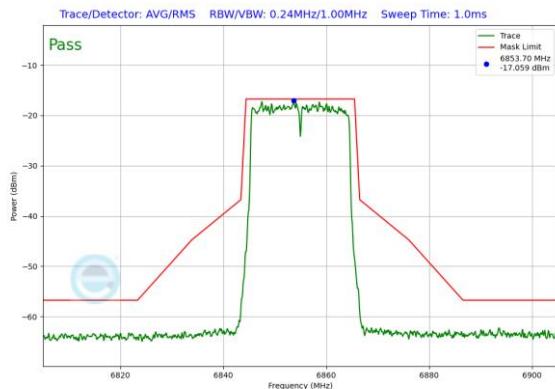


Plot 7-240. In-Band Emission Plot Antenna 5T (20MHz 802.11ax RU242 (UNII Band 7) – Ch. 181)

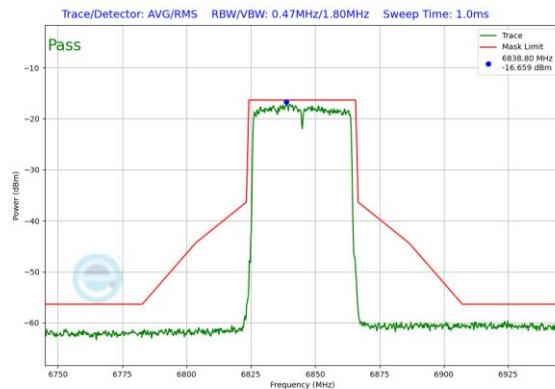


Plot 7-243. In-Band Emission Plot Antenna 1b (40MHz 802.11ax RU484 (UNII Band 7) – Ch. 179)

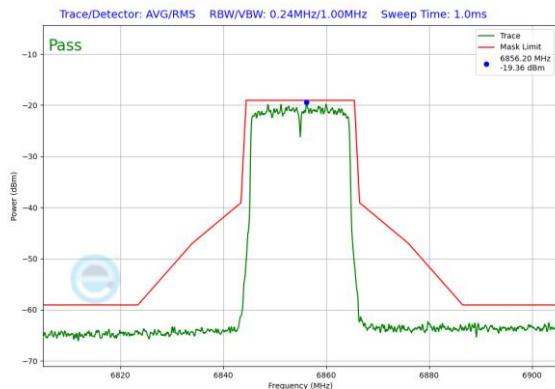


Plot 7-241. In-Band Emission Plot Antenna 1b (20MHz 802.11ax RU242 (UNII Band 7) – Ch. 181)

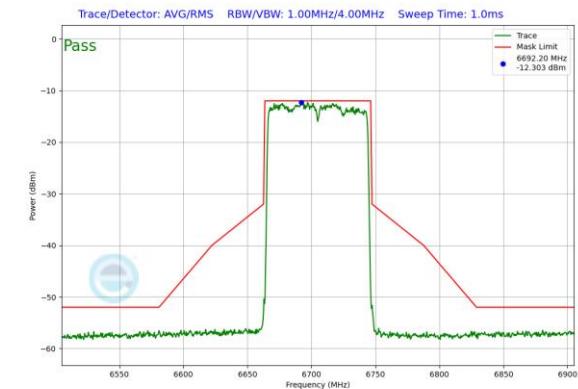

Plot 7-244. In-Band Emission Plot Antenna 5T (80MHz 802.11ax RU996 (UNII Band 7) – Ch. 151)

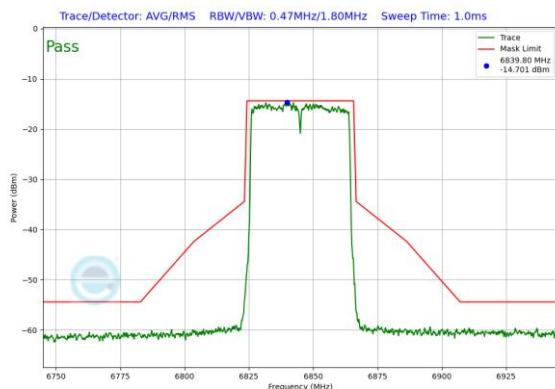

Plot 7-242. In-Band Emission Plot Antenna 5T (40MHz 802.11ax RU484 (UNII Band 7) – Ch. 179)

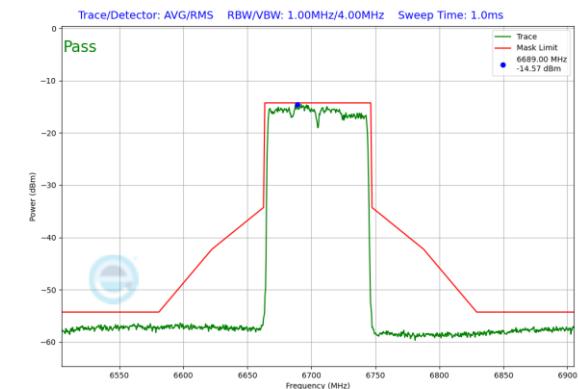


Plot 7-245. In-Band Emission Plot Antenna 1b (80MHz 802.11ax RU996 (UNII Band 7) – Ch. 151)

FCC ID: BCGA3269	element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-26-R1.BCG	Test Dates: 10/25/2024 - 1/15/2025	EUT Type: Tablet Device	Page 124 of 209	

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.



Plot 7-246. In-Band Emission Plot Antenna 5T (160MHz 802.11ax RU996x2 (UNII Band 7) – Ch. 143)

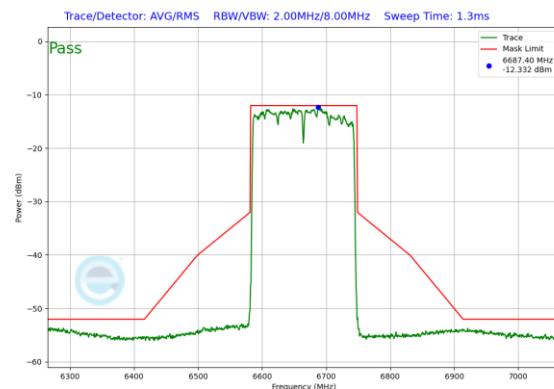

Plot 7-247. In-Band Emission Plot Antenna 1b (160MHz 802.11ax RU996x2 (UNII Band 7) – Ch. 143)

FCC ID: BCGA3269	 element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-26-R1.BCG	Test Dates: 10/25/2024 - 1/15/2025	EUT Type: Tablet Device	Page 125 of 209	

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.6 Contention Based Protocol

§15.407(d)(6); RSS-248[4.7]

Test Overview and Limit

Indoor access points, subordinate devices and client devices operating in the 5.925-7.125 GHz band (herein referred to as unlicensed devices) are required to use technologies that include a contention-based protocol to avoid co-channel interference with incumbent devices sharing the band. To ensure incumbent co-channel operations are detected in a technology-agnostic manner, unlicensed devices are required to detect co-channel radio frequency energy (energy detect) and avoid simultaneous transmission.

Unlicensed indoor low-power devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel and stay off the channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm). The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain.

To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF energy throughout their intended operating channel.

Test Procedure Used

KDB 987594 D02 v03 – Section I

Test Settings

1. Configure the EUT to transmit with a constant duty cycle.
2. Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth
3. Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT.
4. Connect the output port of the EUT to the signal analyzer 2, as shown in Figure 2. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver.
5. Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters set at step two.
6. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
7. Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT as shown in Figure 2.
8. Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer 1.
9. Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
10. Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
11. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 5, choose a different center frequency for the AWGN signal and repeat the process.

FCC ID: BCGA3269 IC: 579C-A3269	element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-25.BCG	Test Dates: 10/25/2024 - 1/15/2025	EUT Type: Tablet Device		Page 126 of 209 V 10.6 10/27/2023

Test Setup

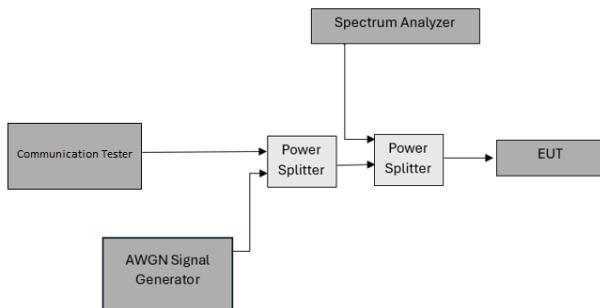


Figure 2. Contention-based protocol test setup, conducted method

Test Notes

1. The EUT does not support channel puncturing.
2. Per guidance from KDB 987594 D02 v03, contention-based protocol was tested using an AWGN signal with a bandwidth of 10MHz. The amplitude of the signal was increased until detected by the EUT, signaled by the ceasing of transmission, marker indicates the point at which the AWGN signal is introduced.
3. Per Guidance from KDB 987594 D04 v03, contention-based protocol was tested with receiver with the lowest antenna gain.
4. 15 trials were ran in order to assure that at least 90% of certainty was met.

Detection Level = Injected AWGN Power (dBm) – Antenna Gain (dBi) + Path Loss (dB)

Equation 7-1. Incumbent Detection Level Calculation

FCC ID: BCGA3269 IC: 579C-A3269	 element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-25.BCG	Test Dates: 10/25/2024 - 1/15/2025	EUT Type: Tablet Device		Page 127 of 209

Band	Channel	Channel Freqnency [MHz]	Channel BW [MHz]	Incumbent Frequency [MHz]	Injected (AWGN) [dBm]	Antenna Gain [dBi]	Adjusted Power Level [dBm]	Detection Limit [dBm]	Margin [dB]
UNII Band 5	53	6215	20	6215	-73.61	-3.30	-70.31	-62.0	-8.31
	47	6185	160	6115	-71.05	-3.30	-67.75	-62.0	-5.75
				6185	-66.27	-3.30	-62.97	-62.0	-0.97
				6260	-69.11	-3.30	-65.81	-62.0	-3.81
UNII Band 7	149	6695	20	6695	-75.68	-3.30	-72.38	-62.0	-10.38
	143	6665	160	6590	-71.99	-3.30	-68.69	-62.0	-6.69
				6665	-80.01	-3.30	-76.71	-62.0	-14.71
				6740	-67.10	-3.30	-63.80	-62.0	-1.80

Table 7-79. Contention Based Protocol – Incumbent Detection Results

Band	Channel	Channel Freqnency [MHz]	Channel BW [MHz]	Incumbent Frequency [MHz]	EUT Transmission Status		
					Adjusted AWGN Power (dBm)		
					Normal	Minimal	Ceased
UNII Band 5	53	6215	20	6215	-81.49	-71.56	-70.31
	47	6185	160	6110	-78.93	-69.00	-67.75
				6185	-74.14	-64.22	-62.97
				6260	-76.99	-67.06	-65.81
UNII Band 7	149	6695	20	6695	-83.36	-73.60	-72.38
	143	6665	160	6750	-79.67	-69.91	-68.69
				6825	-87.69	-77.93	-76.71
				6900	-74.78	-65.02	-63.80


Table 7-80. Contention Based Protocol VLP – Detection Results – All Tx Cases

CBP Detection (1 = Detection, Blank = No Detection)																					
Band	Channel	Channel Freqnency [MHz]	Channel BW [MHz]	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	Detection Rate [%]	Limit [%]	Pass/Fail
UNII Band 5	53	6215	20	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
	47	6185	160	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
				1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
				1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
UNII Band 7	149	6695	20	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
	143	6665	160	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
				1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
				1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	


Table 7-81. Contention Based Protocol – Incumbent Detection Trial Results

FCC ID: BCGA3269	IC: 579C-A3269	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-25.BCG	Test Dates: 10/25/2024 - 1/15/2025	EUT Type: Tablet Device	Page 128 of 209	

AWGN Plots

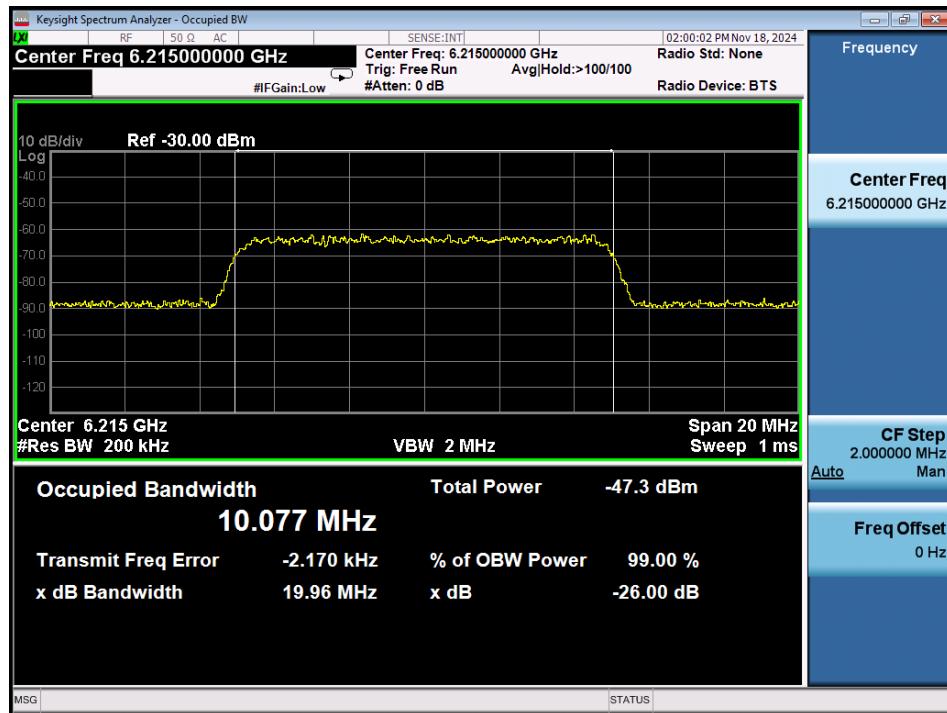


Plot 7-248. AWGN Signal – UNII 5 – 20MHz

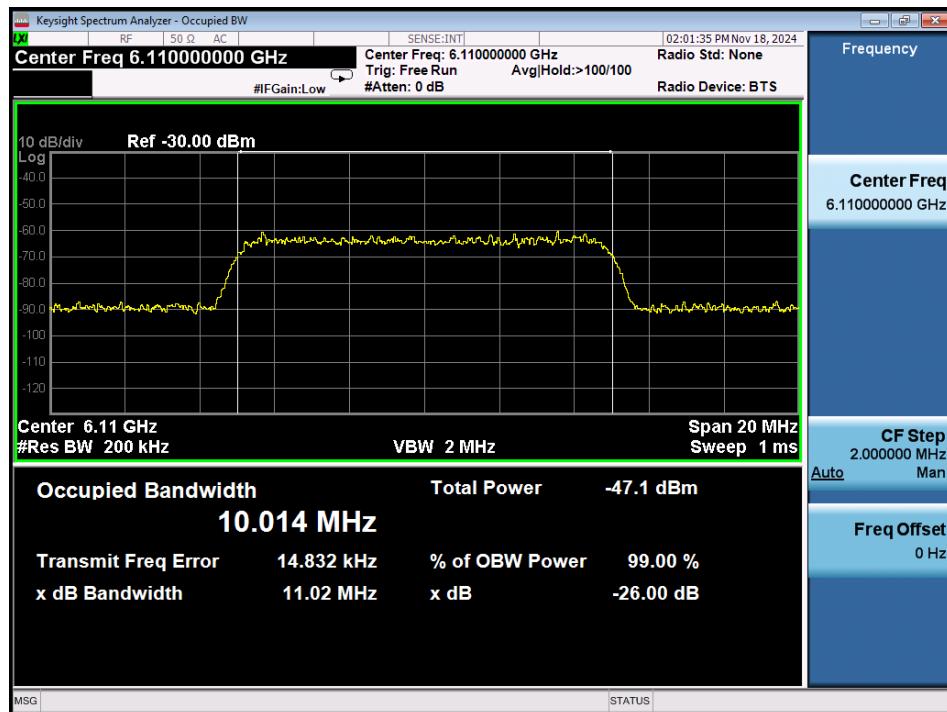


Plot 7-249. AWGN Signal – UNII 5 – 160MHz - Low

FCC ID: BCGA3269 IC: 579C-A3269	 element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210075-25.BCG	Test Dates: 10/25/2024 - 1/15/2025	EUT Type: Tablet Device	Page 129 of 209

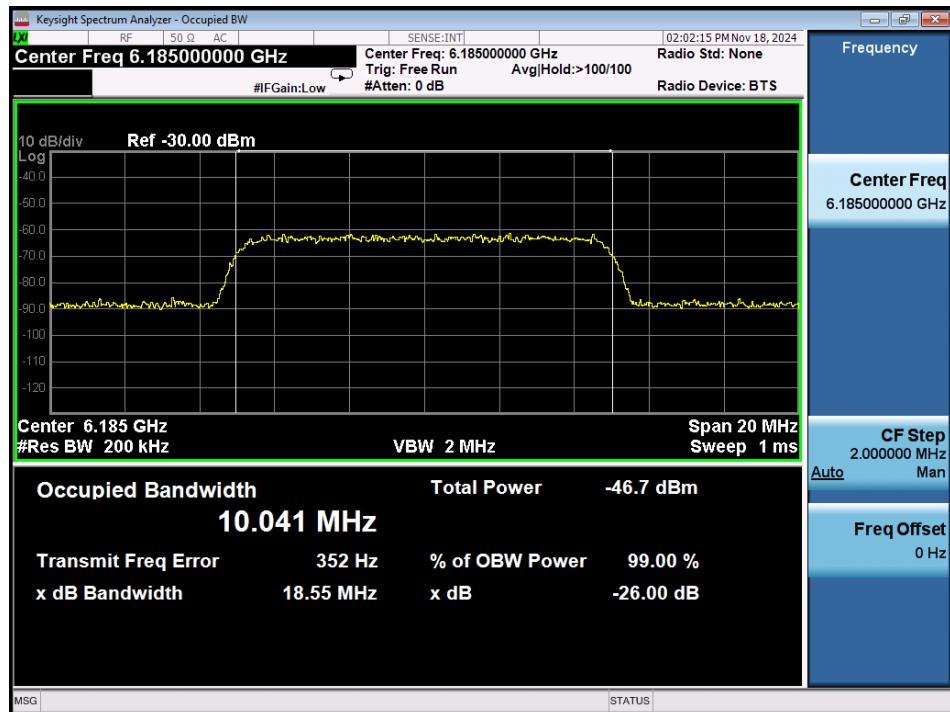


Plot 7-250. AWGN Signal – UNII 5 – 160MHz – Mid

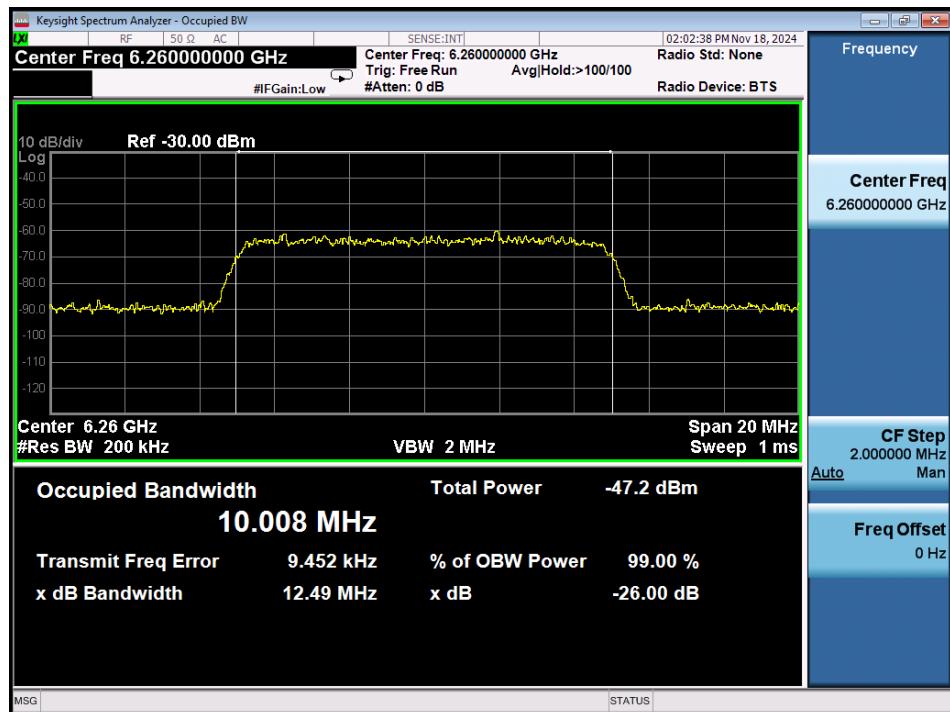


Plot 7-251. AWGN Signal – UNII 5 – 160MHz - High

FCC ID: BCGA3269	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
IC: 579C-A3269	Test Dates: 10/25/2024 - 1/15/2025	EUT Type: Tablet Device		Page 130 of 209

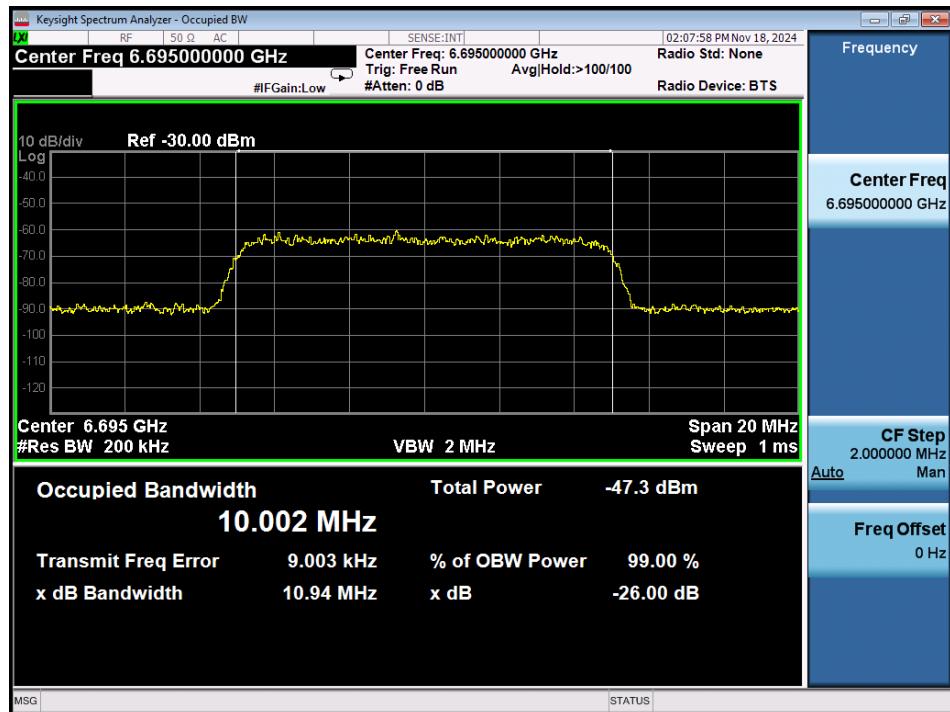


Plot 7-252. AWGN Signal – UNII 7 – 20MHz

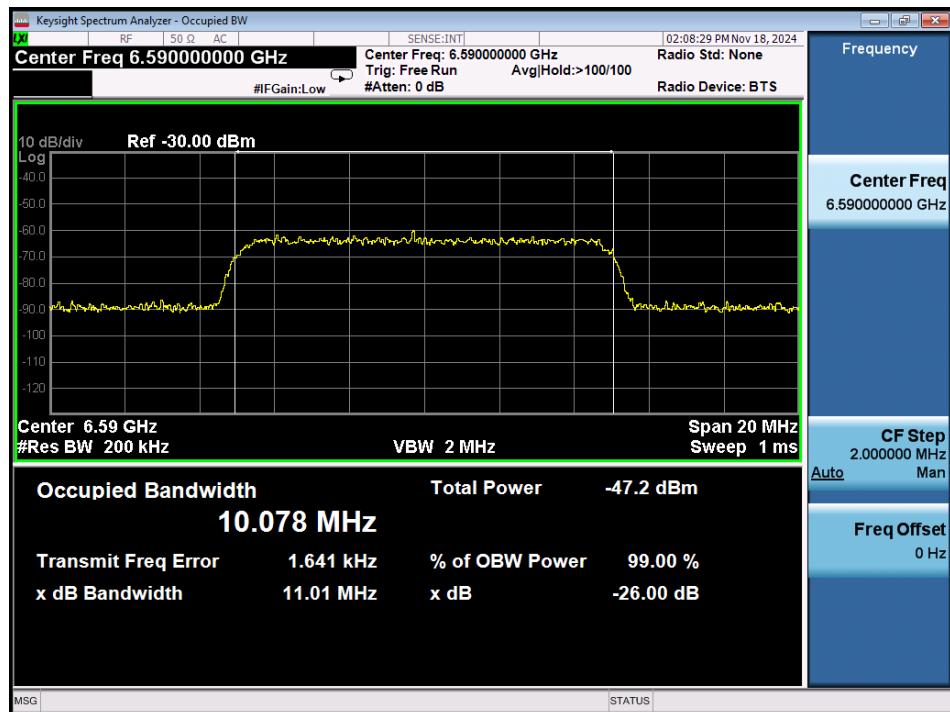


Plot 7-253. AWGN Signal – UNII 7 – 160MHz - Low

FCC ID: BCGA3269 IC: 579C-A3269	 element MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1C2410210075-25.BCG	Test Dates: 10/25/2024 - 1/15/2025	EUT Type: Tablet Device	Page 131 of 209	

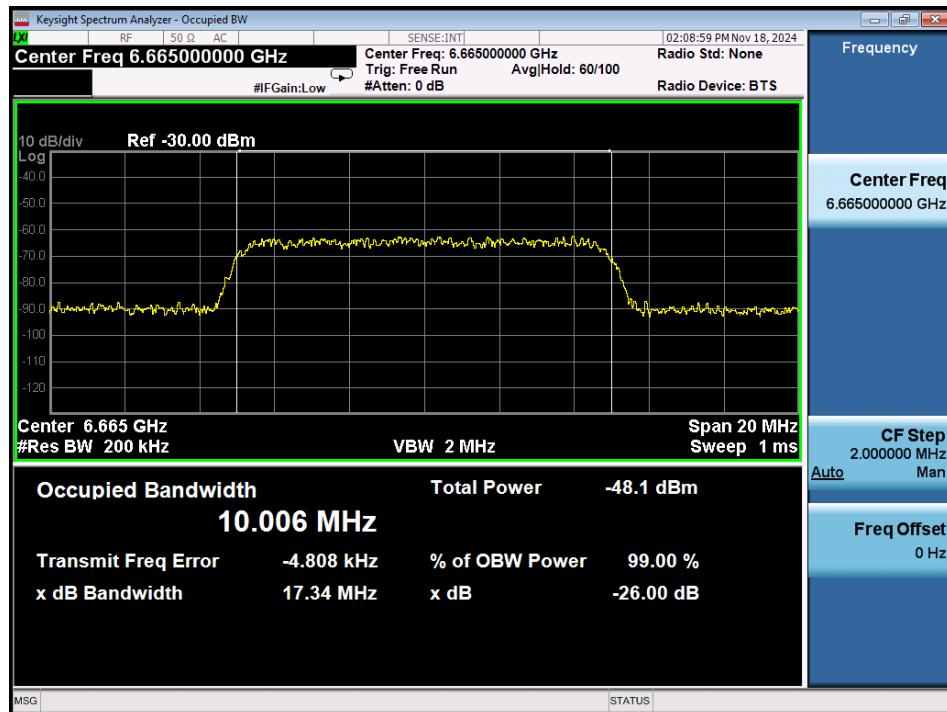

Plot 7-254. AWGN Signal – UNII 7 – 160MHz – Mid

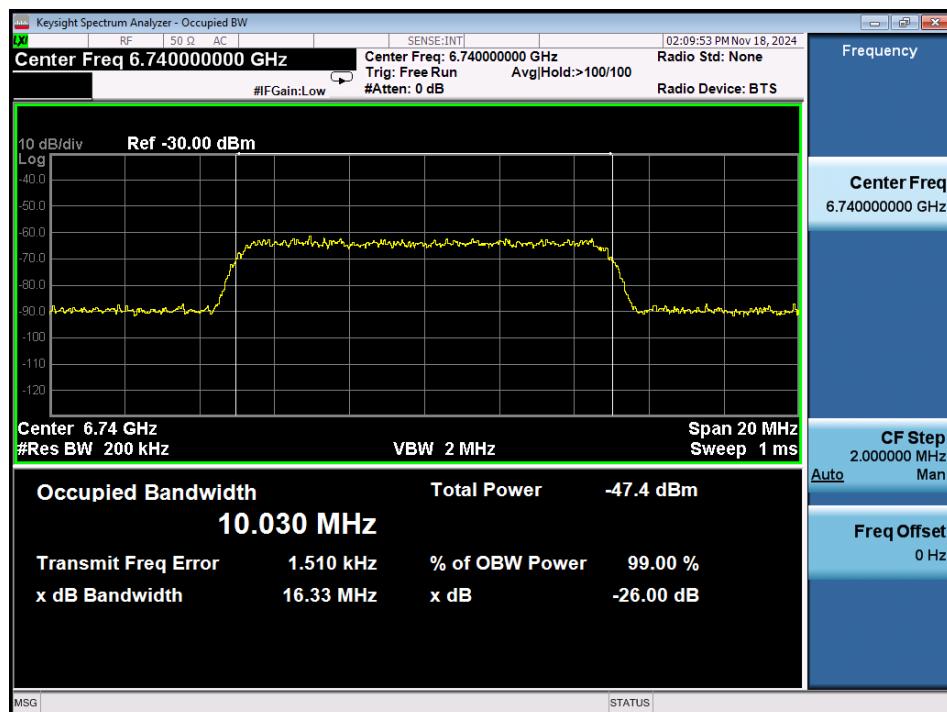


Plot 7-255. AWGN Signal – UNII 7 – 160MHz - High


FCC ID: BCGA3269 IC: 579C-A3269	 element MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1C2410210075-25.BCG	Test Dates: 10/25/2024 - 1/15/2025	EUT Type: Tablet Device	Page 132 of 209	

Contention-Based Protocol Timing Plots

Plot 7-256. Contention Based Protocol Timing Plot – UNII 5 – 20MHz Channel 53

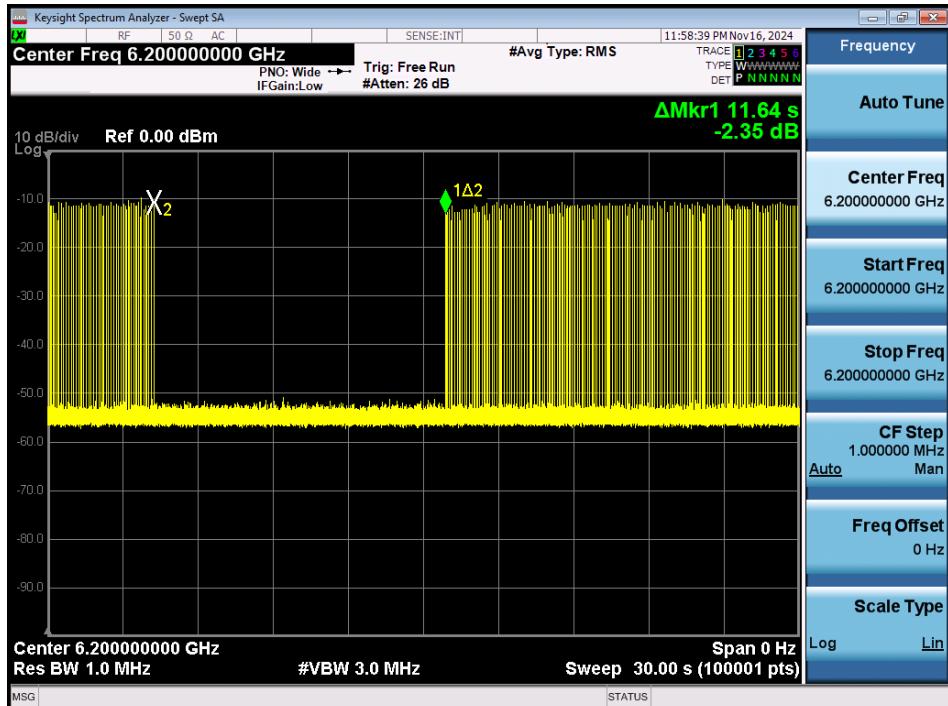


Plot 7-257. Contention Based Protocol Timing Plot – UNII 5 – 160MHz Channel 47 – Low

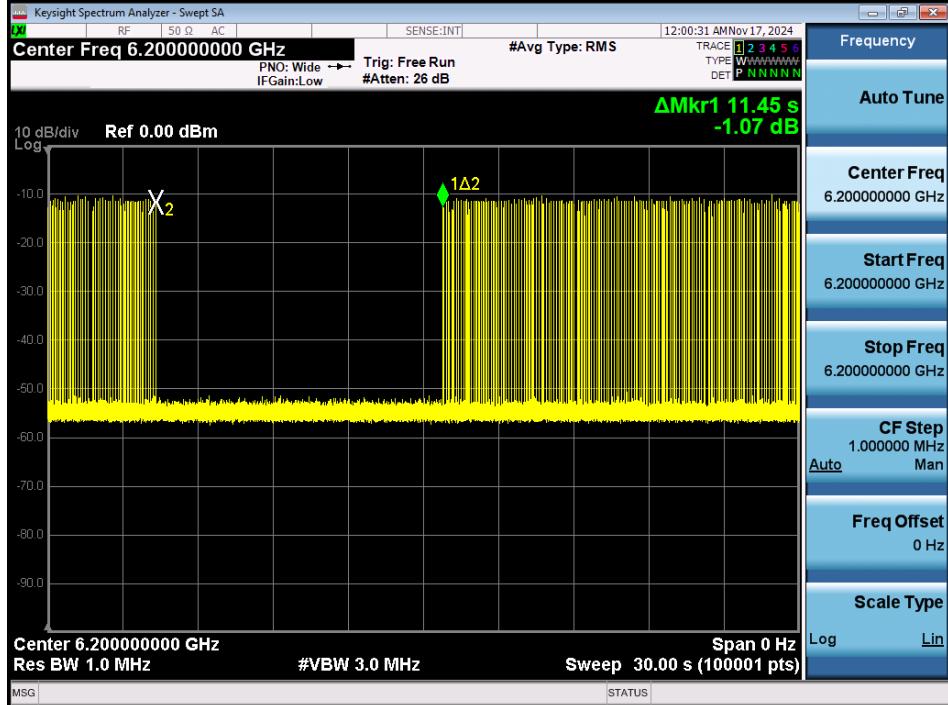


Plot 7-258. Contention Based Protocol Timing Plot – UNII 5 – 160MHz Channel 47 – Mid

FCC ID: BCGA3269		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-25.BCG	Test Dates: 10/25/2024 - 1/15/2025	EUT Type: Tablet Device	Page 133 of 209

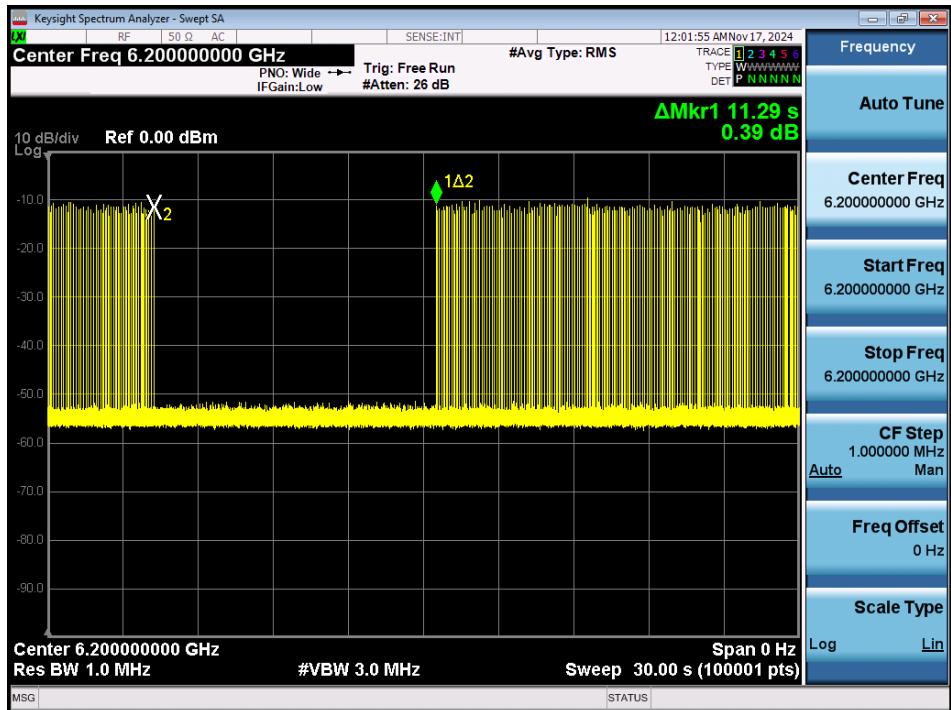


Plot 7-259. Contention Based Protocol Timing Plot – UNII 5 – 160MHz Channel 47 – High

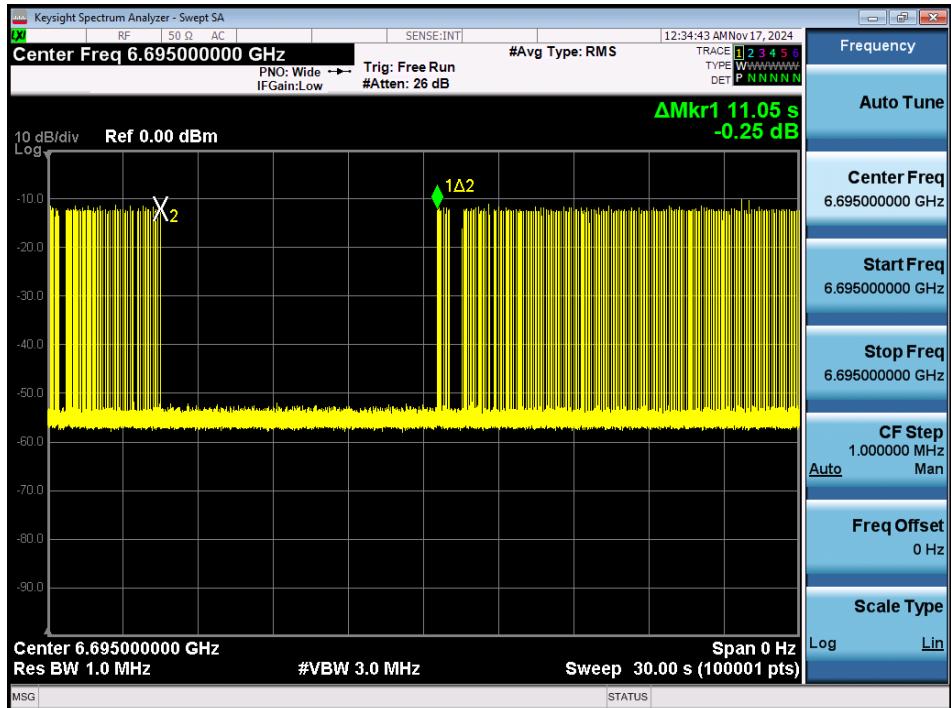


Plot 7-260. Contention Based Protocol Timing Plot – UNII 7 – 20MHz Channel 149

FCC ID: BCGA3269	element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-25.BCG	Test Dates: 10/25/2024 - 1/15/2025	EUT Type: Tablet Device	Page 134 of 209	

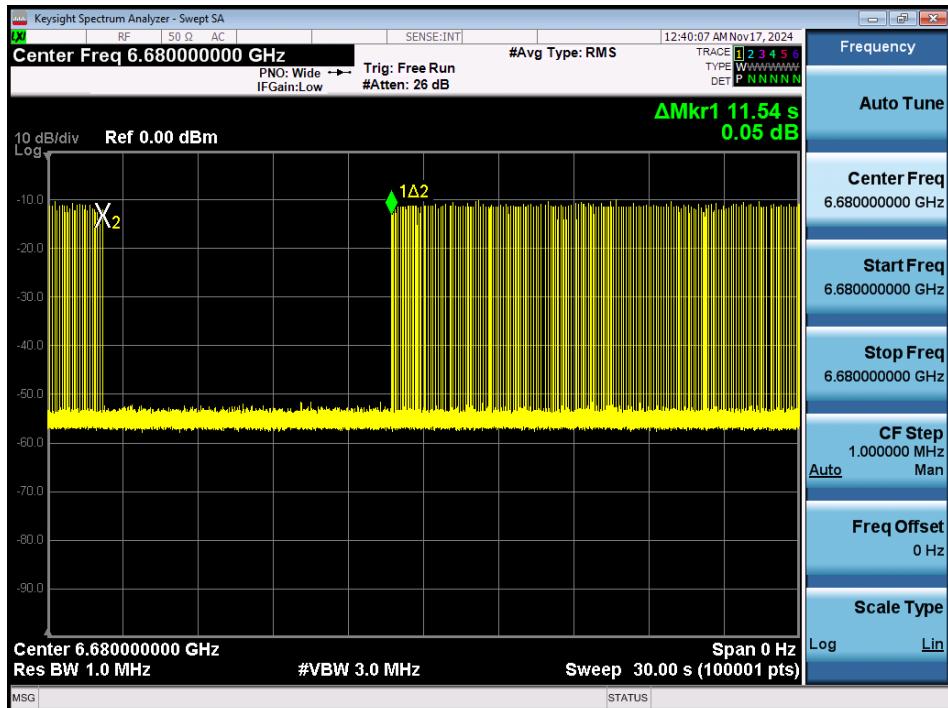


Plot 7-261. Contention Based Protocol Timing Plot – UNII 7 – 160MHz Channel 143 – Low

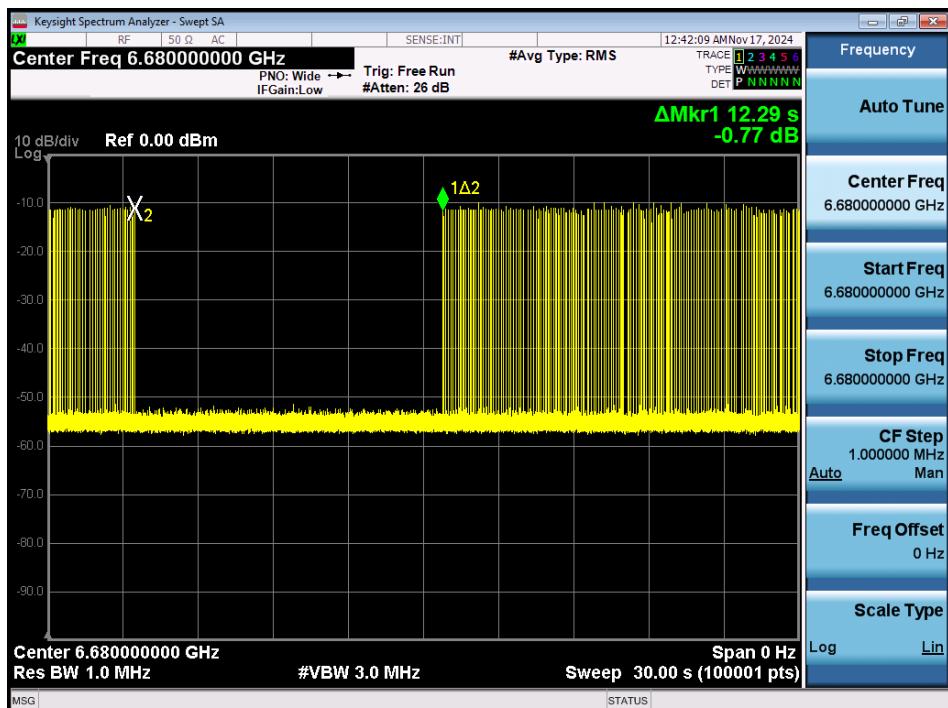


Plot 7-262. Contention Based Protocol Timing Plot – UNII 7 – 160MHz Channel 143 – Mid

FCC ID: BCGA3269 IC: 579C-A3269	 element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-25.BCG	Test Dates: 10/25/2024 - 1/15/2025	EUT Type: Tablet Device		Page 135 of 209

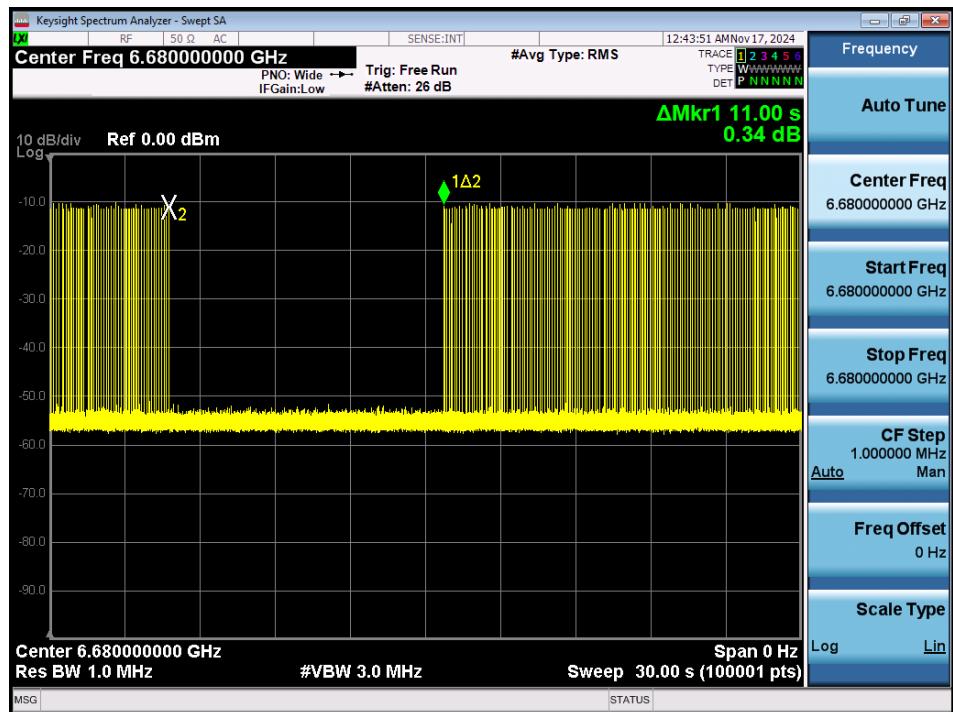


Plot 7-263. Contention Based Protocol Timing Plot – UNII 7 – 160MHz Channel 143 – High

FCC ID: BCGA3269 IC: 579C-A3269	element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-25.BCG	Test Dates: 10/25/2024 - 1/15/2025	EUT Type: Tablet Device	Page 136 of 209	

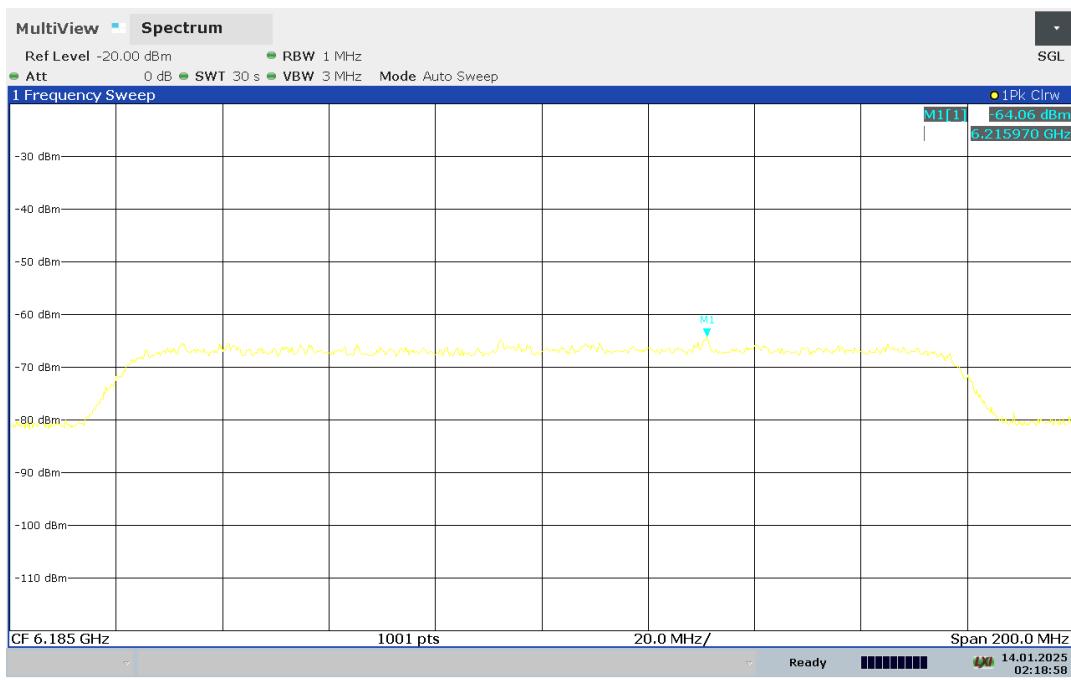CBP Bandwidth Reduction Plots


02:18:58 14.01.2025


Plot 7-264. 160MHz Bandwidth, Before AWGN Signal Injected – Channel 47

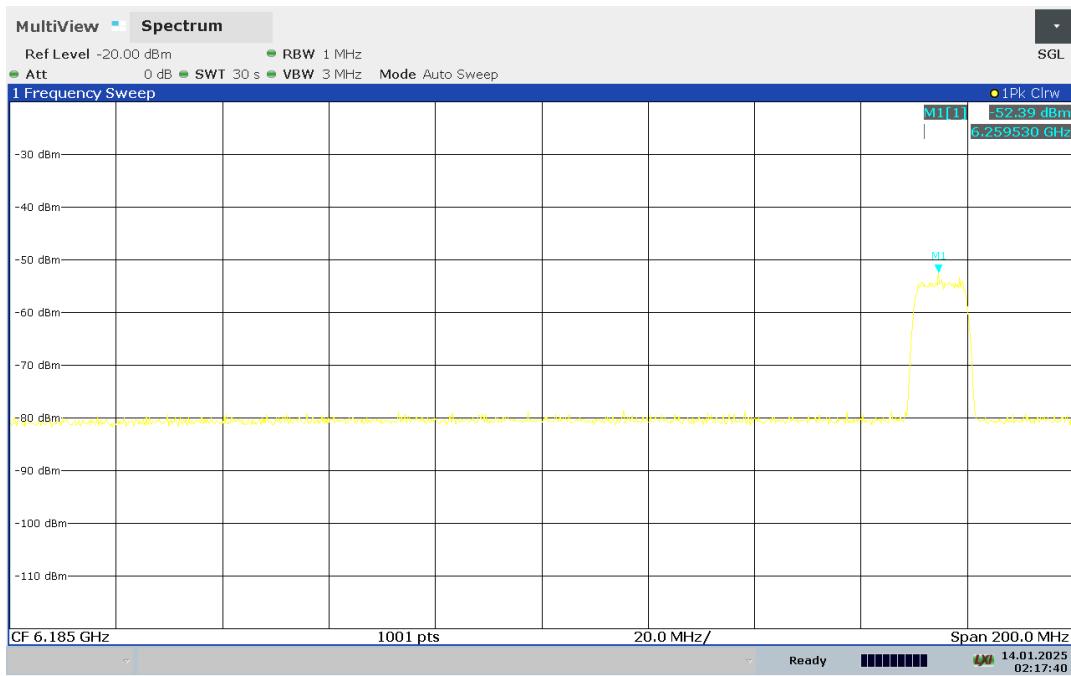


02:17:41 14.01.2025

Plot 7-265. 160MHz Bandwidth, AWGN Signal Injected at Low End – Channel 47

FCC ID: BCGA3269	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
IC: 579C-A3269	Test Report S/N: 1C2410210075-25.BCG	Test Dates: 10/25/2024 - 1/15/2025	EUT Type: Tablet Device	Page 137 of 209

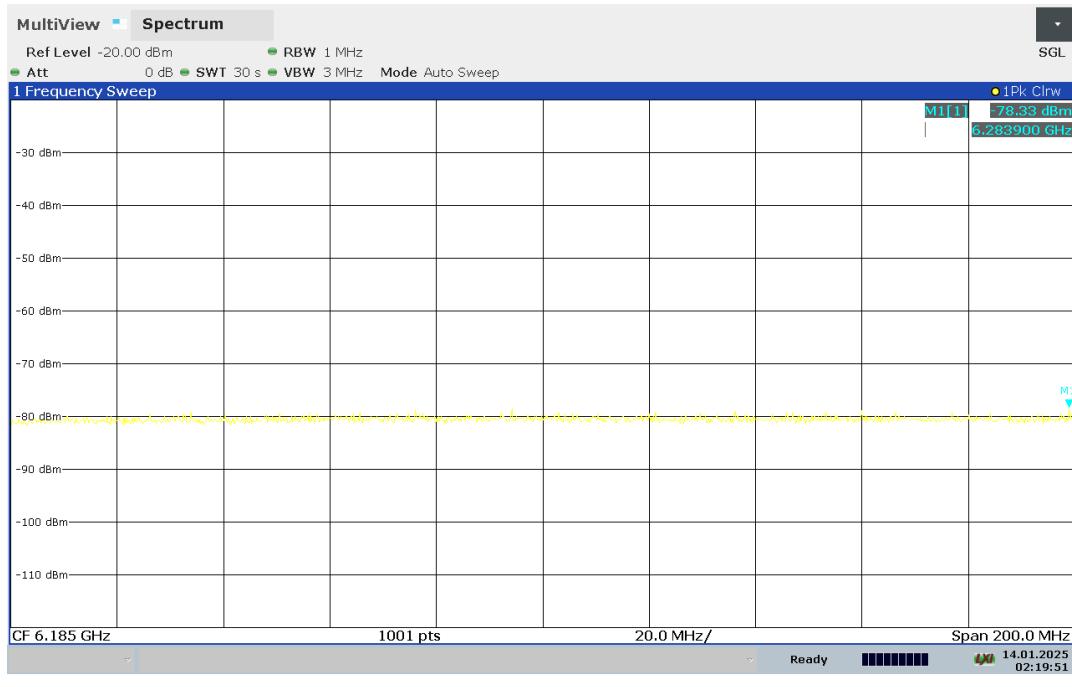

Plot 7-266. 160MHz Bandwidth, AWGN Signal Injected at Center – Channel 47

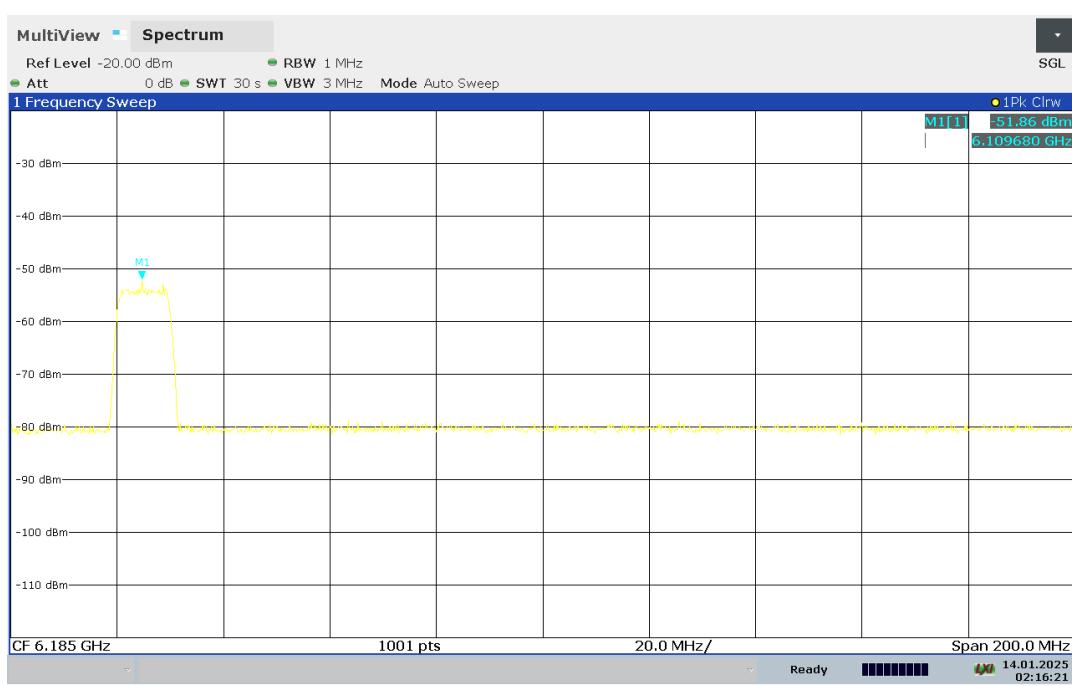

Plot 7-267. 160MHz Bandwidth, AWGN Signal Injected at High End – Channel 47

FCC ID: BCGA3269 IC: 579C-A3269	 element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-25.BCG	Test Dates: 10/25/2024 - 1/15/2025	EUT Type: Tablet Device	Page 138 of 209	

7.7 Radiated Spurious Emissions – Above 1GHz

§15.407(b) §15.205 §15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2020 and KDB 789033 D02 v02r01, and at the appropriate frequencies. All channels, modes (e.g. RU26, RU52, RU106, RU242, RU484, RU996 and RU996x2) and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

For transmitters operating in the 5.925-7.125 GHz band: All emissions outside of the 5.925-7.125 GHz band shall not exceed an EIRP of -27 dBm/MHz. Emissions found in a restricted band are subject to the limits of 15.209 and RSS-Gen (8.9) as shown in the table below.

Frequency	Field Strength [μ V/m]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-82. Radiated Limits

Test Procedures Used

ANSI C63.10-2020 – Sections 12.7.7, 12.7.6
KDB 789033 D02 v02r01 – Section G

Test Settings

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times$ span/RBW)
6. Averaging type = power (RMS)
7. Sweep time = auto couple
8. Trace was averaged over 100 sweeps

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA3269 IC: 579C-A3269	 element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-25.BCG	Test Dates: 10/25/2024 - 1/15/2025	EUT Type: Tablet Device		Page 139 of 209

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

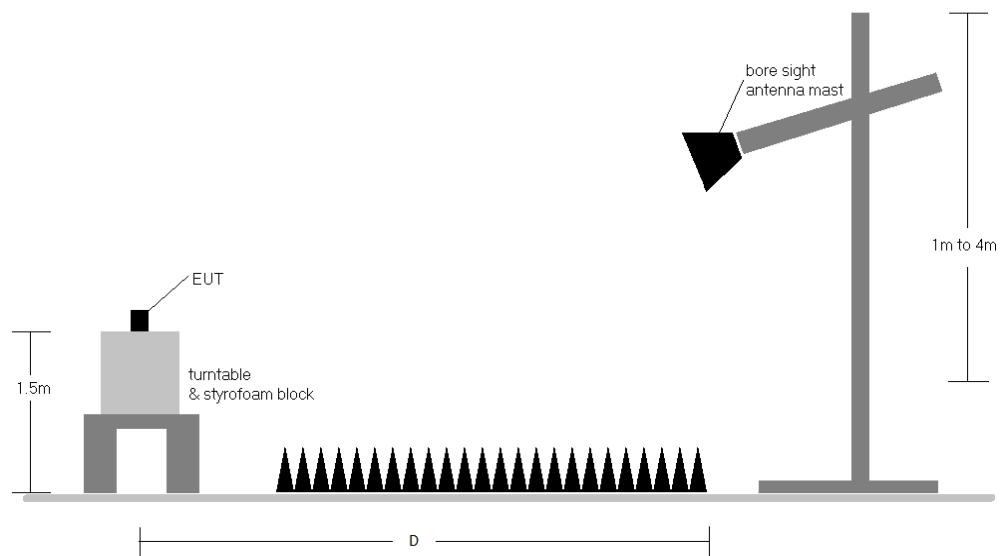


Figure 7-5. Test Instrument & Measurement Setup

FCC ID: BCGA3269 IC: 579C-A3269	 MEASUREMENT REPORT (CERTIFICATION)		
Test Report S/N: 1C2410210075-25.BCG	Test Dates: 10/25/2024 - 1/15/2025	EUT Type: Tablet Device	Approved by: Technical Manager Page 140 of 209

Test Notes

1. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 and section 8.10 of RSS-Gen are below the limit shown in Table 7-82.
2. All spurious emissions lying in restricted bands specified in §15.205 and section 8.10 of RSS-Gen are below the limit shown in Table 7-82. All spurious emissions that do not lie in a restricted band are subject to a limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas.
5. D is the measurement test distance and emissions 1-18GHz were measured at a 3 meters test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
6. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
7. All data rates were investigated and only the worse case is reported
8. The unit was tested with all possible modes and only the highest emission is reported.
9. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
10. All radiated measurements were tested at the highest supported power setting per band.

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level [dB μ V/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB] – Preamplifier Gain [dB]
- Margin [dB] = Field Strength Level [dB μ V/m] – Limit [dB μ V/m]

Radiated Band Edge Measurement Offset


- The amplitude offset shown in the radiated restricted band edge plots in Sections 7.7.3 to 7.7.22 was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

FCC ID: BCGA3269 IC: 579C-A3269	 element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-25.BCG	Test Dates: 10/25/2024 - 1/15/2025	EUT Type: Tablet Device		Page 141 of 209

7.7.1 SDM Primary Radiated Spurious Emission

RU242

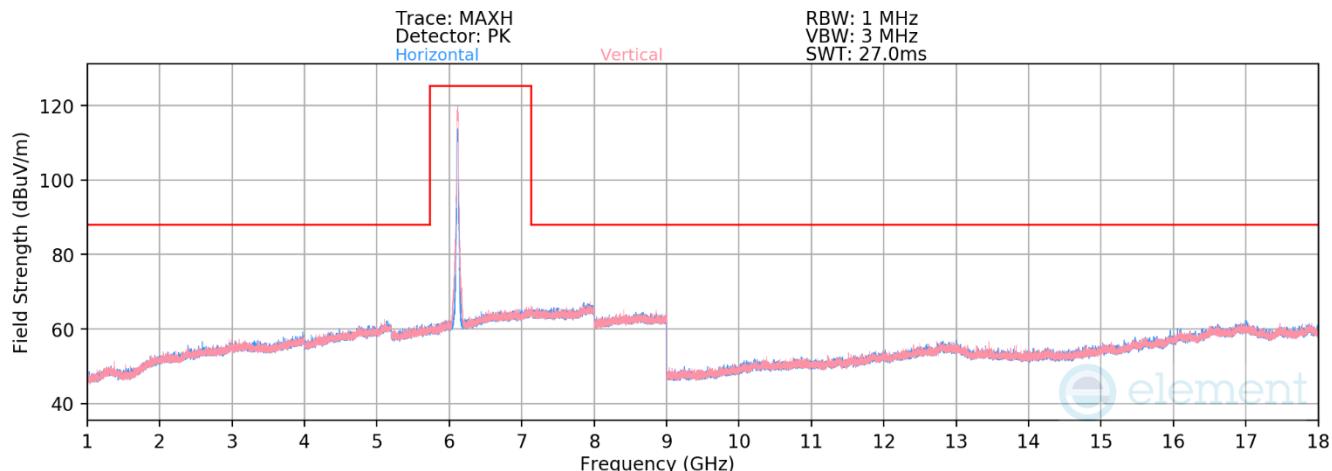

Plot 7-268. Radiated Spurious Emissions 1-18GHz SDM Primary (802.11ax – Ch. 33 – RU242)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6115MHz
 Channel: 33


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
* 12230.00	Average	V	-	-	-86.12	21.29	42.17	53.98	-11.81
* 12230.00	Peak	V	-	-	-74.12	20.62	53.50	73.98	-20.48

Table 7-83. Radiated Spurious Emission Measurements SDM Primary – RU242


FCC ID: BCGA3269 IC: 579C-A3269	MEASUREMENT REPORT (CERTIFICATION)				Approved by: Technical Manager
Test Report S/N: 1C2410210075-25.BCG	Test Dates: 10/25/2024 - 1/15/2025	EUT Type: Tablet Device			

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

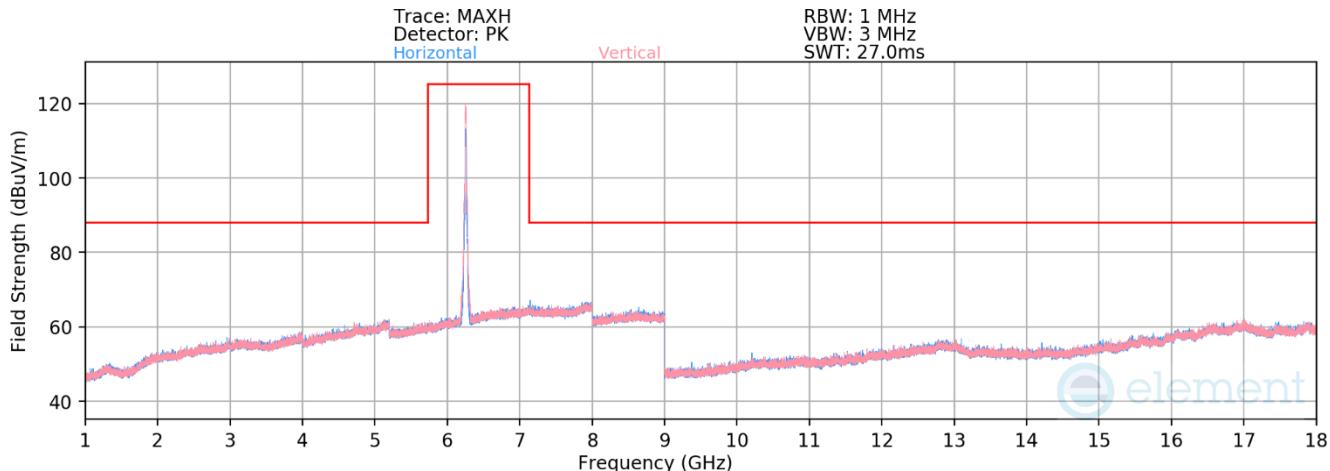

Plot 7-269. Radiated Spurious Emissions 1-18GHz SDM Primary (802.11ax – Ch. 61 – RU242)

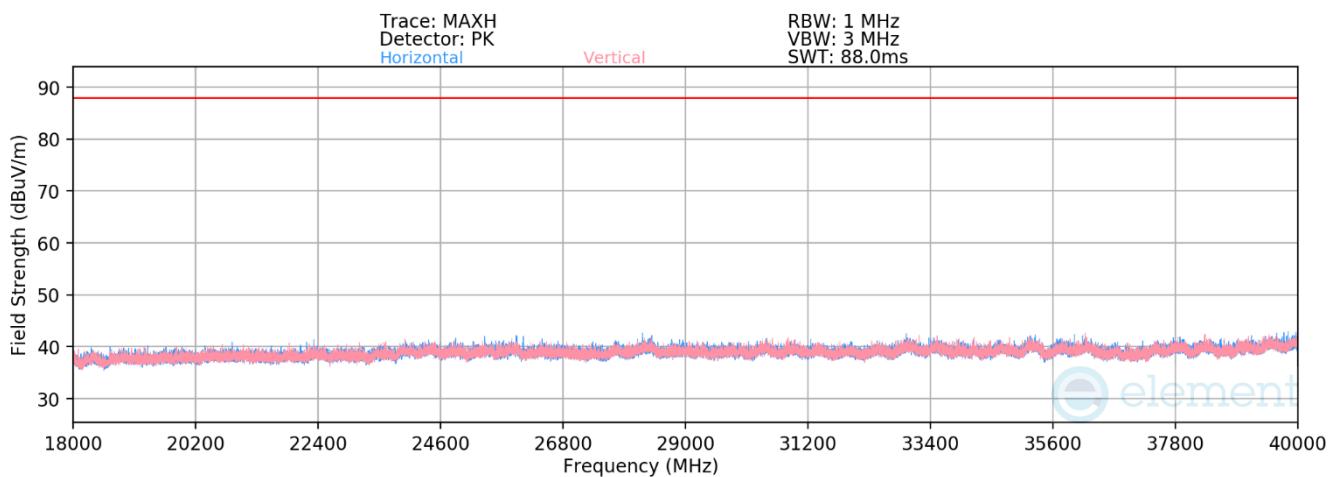


Plot 7-270. Radiated Spurious Emissions 18-40GHz SDM Primary (802.11ax – Ch. 61 – RU242)

Mode:	802.11ax
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6255MHz
Channel:	61

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
* 12510.00	Average	H	-	-	-85.09	21.30	43.21	53.98	-10.77
* 12510.00	Peak	H	-	-	-73.41	21.42	55.02	73.98	-18.96

Table 7-84. Radiated Spurious Emission Measurements SDM Primary – RU242

FCC ID: BCGA3269 IC: 579C-A3269	MEASUREMENT REPORT (CERTIFICATION)					Approved by: Technical Manager
Test Report S/N: 1C2410210075-25.BCG	Test Dates: 10/25/2024 - 1/15/2025	EUT Type: Tablet Device				Page 143 of 209

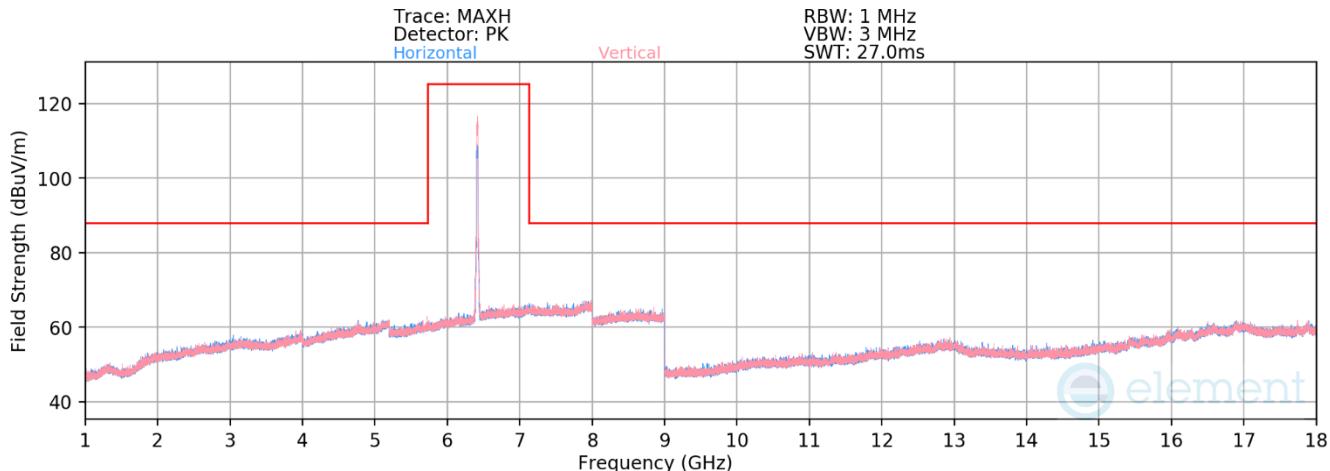


Plot 7-271. Radiated Spurious Emissions 1-18GHz SDM Primary (802.11ax – Ch. 93 – RU242)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6415MHz
 Channel: 93

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
12830.00	Average	H	-	-	-85.53	22.27	43.74	68.23	-24.49
12830.00	Peak	H	-	-	-73.91	22.00	55.09	88.23	-33.14

Table 7-85. Radiated Spurious Emission Measurements SDM Primary – RU242

FCC ID: BCGA3269 IC: 579C-A3269	element			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-25.BCG	Test Dates: 10/25/2024 - 1/15/2025	EUT Type: Tablet Device			

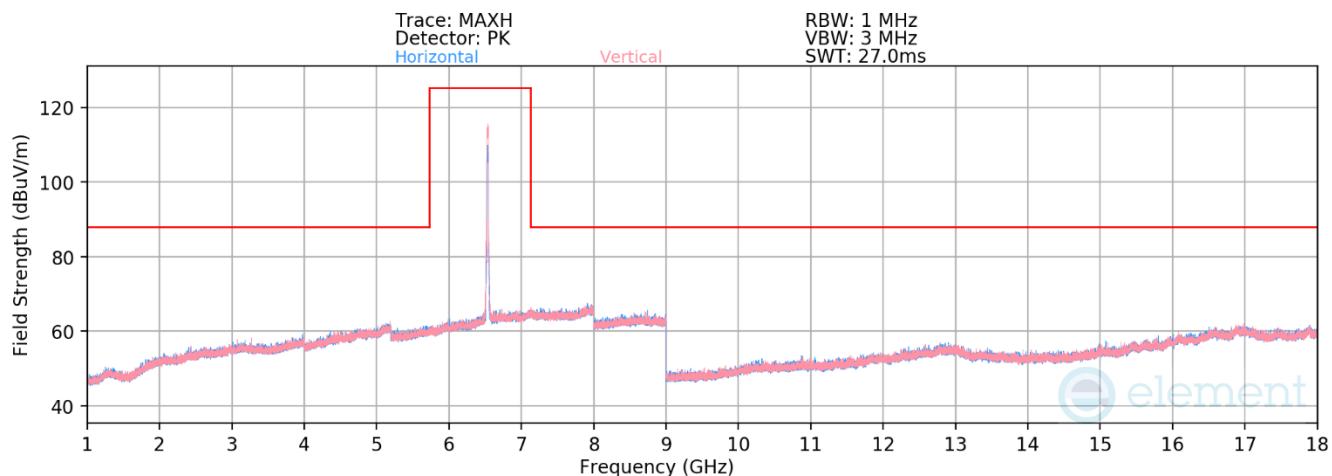


Plot 7-272. Radiated Spurious Emissions 1-18GHz SDM Primary (802.11ax – Ch. 117 – RU242)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6535MHz
 Channel: 117


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
13070.00	Average	V	-	-	-85.33	21.89	43.57	68.23	-24.66
13070.00	Peak	V	-	-	-74.29	21.88	54.59	88.23	-33.64

Table 7-86. Radiated Spurious Emission Measurements SDM Primary – RU242

FCC ID: BCGA3269 IC: 579C-A3269	 element MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1C2410210075-25.BCG	Test Dates: 10/25/2024 - 1/15/2025	EUT Type: Tablet Device		

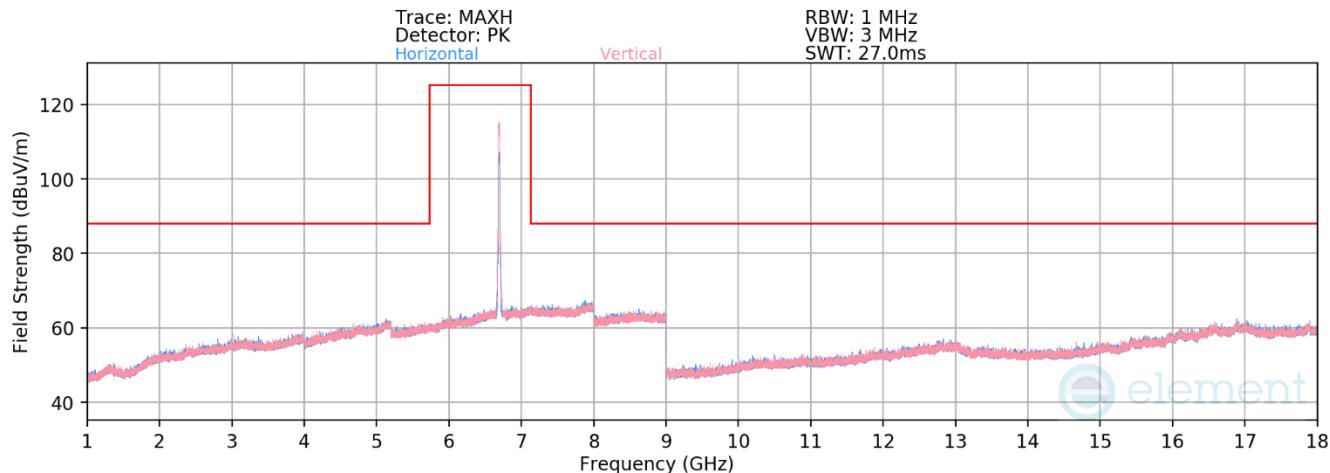

Plot 7-273. Radiated Spurious Emissions 1-18GHz SDM Primary (802.11ax – Ch. 149 – RU242)

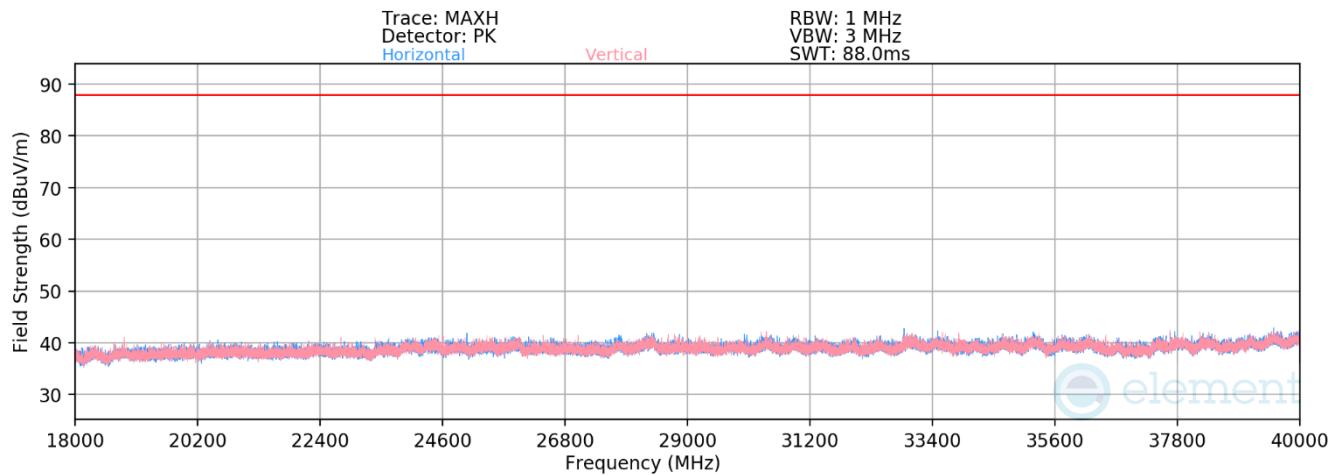


Plot 7-274. Radiated Spurious Emissions 18-40GHz SDM Primary (802.11ax – Ch. 149 – RU242)

Mode:	802.11ax
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6695MHz
Channel:	149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
* 13390.00	Average	V	-	-	-85.65	22.13	43.48	53.98	-10.50
* 13390.00	Peak	V	-	-	-74.25	21.88	54.63	73.98	-19.35

Table 7-87. Radiated Spurious Emission Measurements SDM Primary – RU242

FCC ID: BCGA3269 IC: 579C-A3269	MEASUREMENT REPORT (CERTIFICATION)					Approved by: Technical Manager
Test Report S/N: 1C2410210075-25.BCG	Test Dates: 10/25/2024 - 1/15/2025	EUT Type: Tablet Device				Page 146 of 209

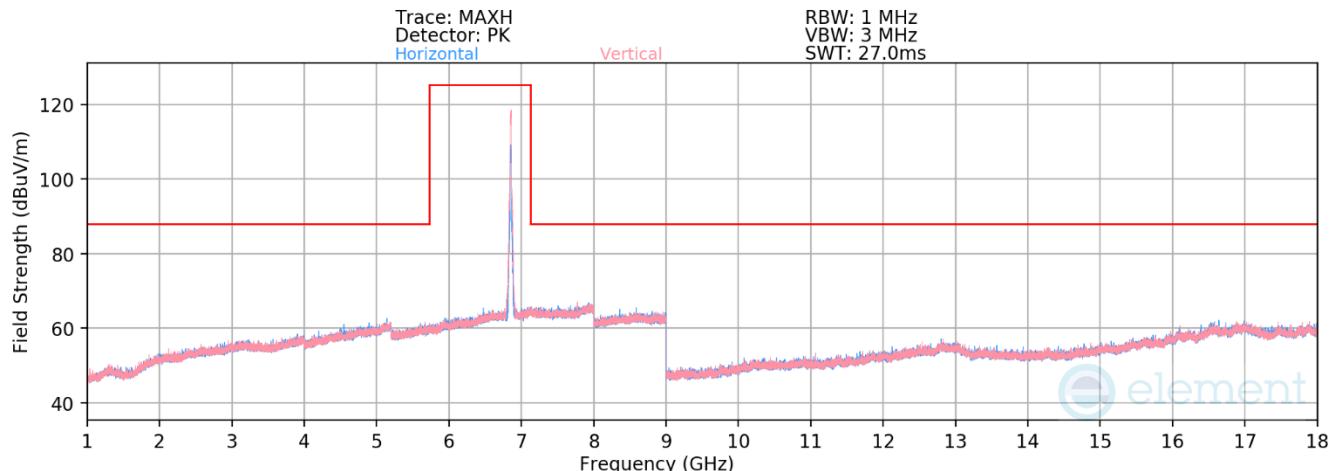

Plot 7-275. Radiated Spurious Emissions 1-18GHz SDM Primary (802.11ax – Ch. 181 – RU242)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6855MHz
 Channel: 181


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
13710.00	Average	H	-	-	-85.83	21.70	42.87	68.23	-25.36
13710.00	Peak	H	-	-	-74.24	21.70	54.45	88.23	-33.78

Table 7-88. Radiated Spurious Emission Measurements SDM Primary – RU242

FCC ID: BCGA3269 IC: 579C-A3269	MEASUREMENT REPORT (CERTIFICATION)				Approved by: Technical Manager
Test Report S/N: 1C2410210075-25.BCG	Test Dates: 10/25/2024 - 1/15/2025	EUT Type: Tablet Device			

7.7.2 SDM Diversity Radiated Spurious Emission

RU242

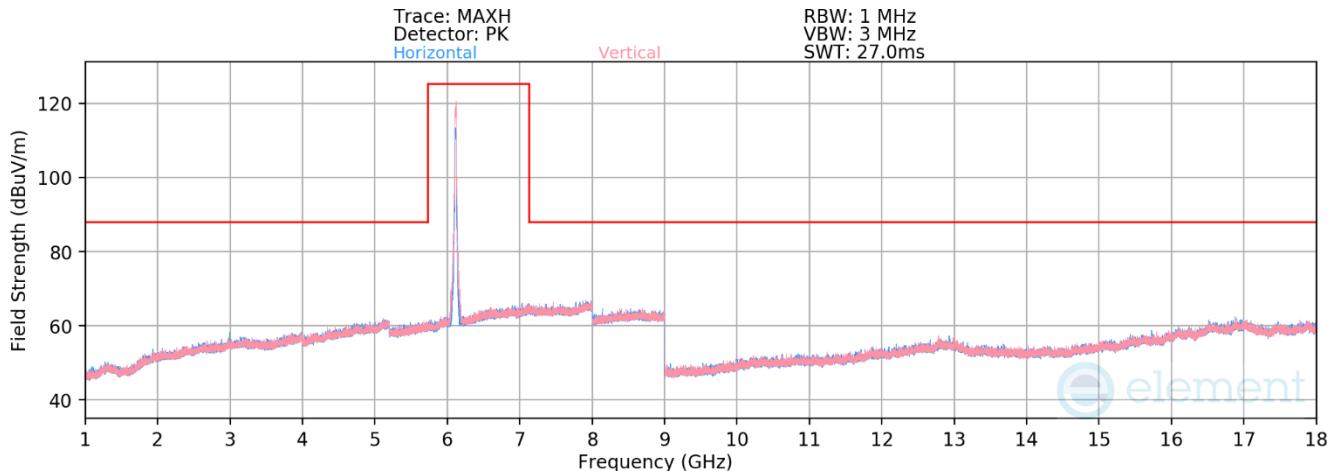

Plot 7-276. Radiated Spurious Emissions 1-18GHz SDM Diversity (802.11ax – Ch. 33 – RU242)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6115MHz
 Channel: 33


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
* 12230.00	Average	H	-	-	-85.63	20.77	42.15	53.98	-11.83
* 12230.00	Peak	H	-	-	-74.29	20.62	53.33	73.98	-20.65

Table 7-89. Radiated Spurious Emission Measurements SDM Diversity – RU242


FCC ID: BCGA3269 IC: 579C-A3269	MEASUREMENT REPORT (CERTIFICATION)				Approved by: Technical Manager
Test Report S/N: 1C2410210075-25.BCG	Test Dates: 10/25/2024 - 1/15/2025	EUT Type: Tablet Device			

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

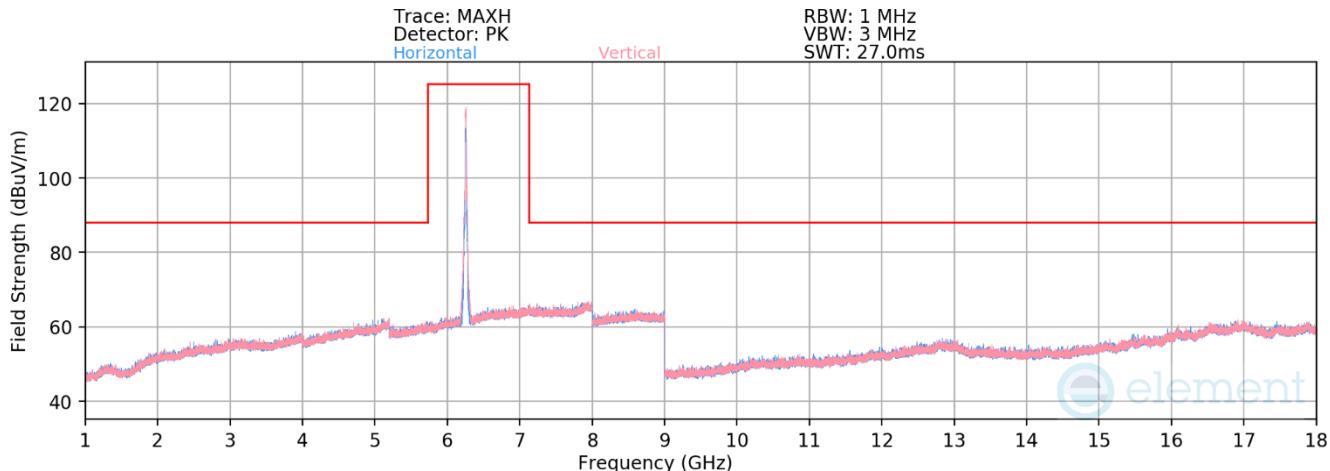

Plot 7-277. Radiated Spurious Emissions 1-18GHz SDM Diversity (802.11ax – Ch. 61 – RU242)

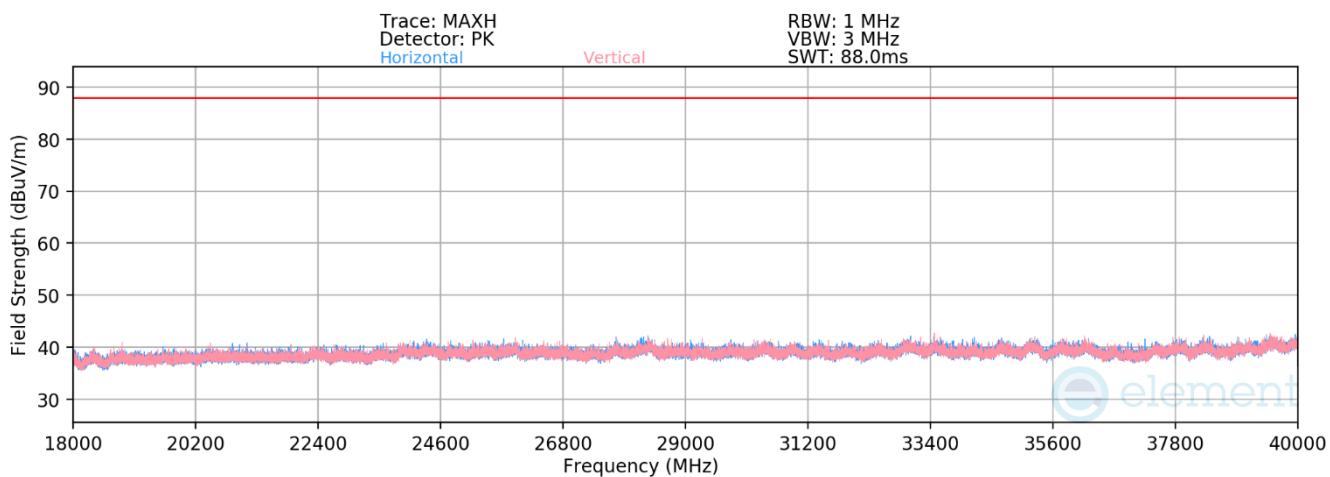


Plot 7-278. Radiated Spurious Emissions 18-40GHz SDM Diversity (802.11ax – Ch. 61 – RU242)

Mode:	802.11ax
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6255MHz
Channel:	61

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
* 12510.00	Average	V	-	-	-85.17	21.30	43.13	53.98	-10.85
* 12510.00	Peak	V	-	-	-73.64	21.26	54.62	73.98	-19.36

Table 7-90. Radiated Spurious Emission Measurements SDM Diversity – RU242

FCC ID: BCGA3269 IC: 579C-A3269	MEASUREMENT REPORT (CERTIFICATION)					Approved by: Technical Manager
Test Report S/N: 1C2410210075-25.BCG	Test Dates: 10/25/2024 - 1/15/2025	EUT Type: Tablet Device				Page 149 of 209

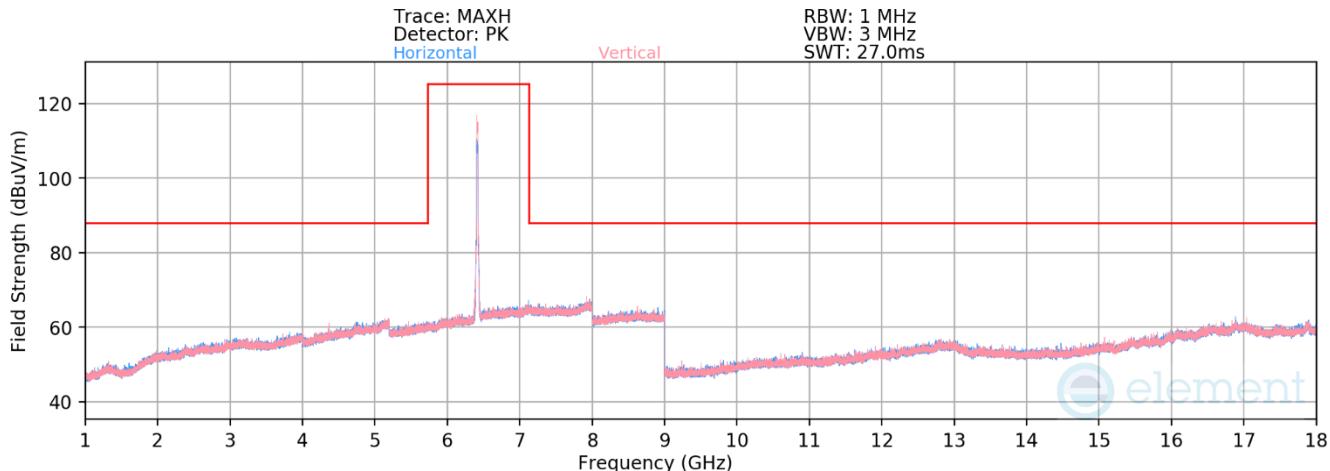


Plot 7-279. Radiated Spurious Emissions 1-18GHz SDM Diversity (802.11ax – Ch. 93 – RU242)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6415MHz
 Channel: 93

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
12830.00	Average	H	-	-	-84.92	21.79	43.87	68.23	-24.36
12830.00	Peak	H	-	-	-73.77	21.79	55.02	88.23	-33.21

Table 7-91. Radiated Spurious Emission Measurements SDM Diversity – RU242

FCC ID: BCGA3269 IC: 579C-A3269	 element MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1C2410210075-25.BCG	Test Dates: 10/25/2024 - 1/15/2025	EUT Type: Tablet Device		

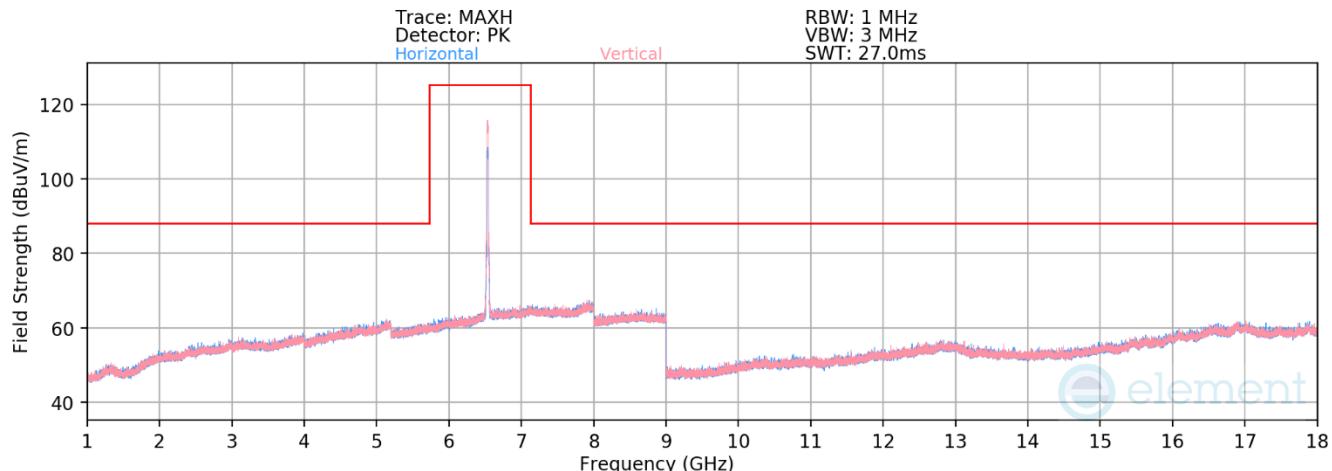

Plot 7-280. Radiated Spurious Emissions 1-18GHz SDM Diversity (802.11ax – Ch. 117 – RU242)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6535MHz
 Channel: 117


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
13070.00	Average	H	-	-	-85.50	22.21	43.71	68.23	-24.52
13070.00	Peak	H	-	-	-74.14	21.89	54.76	88.23	-33.47

Table 7-92. Radiated Spurious Emission Measurements SDM Diversity – RU242


FCC ID: BCGA3269 IC: 579C-A3269	 element MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1C2410210075-25.BCG	Test Dates: 10/25/2024 - 1/15/2025	EUT Type: Tablet Device		

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

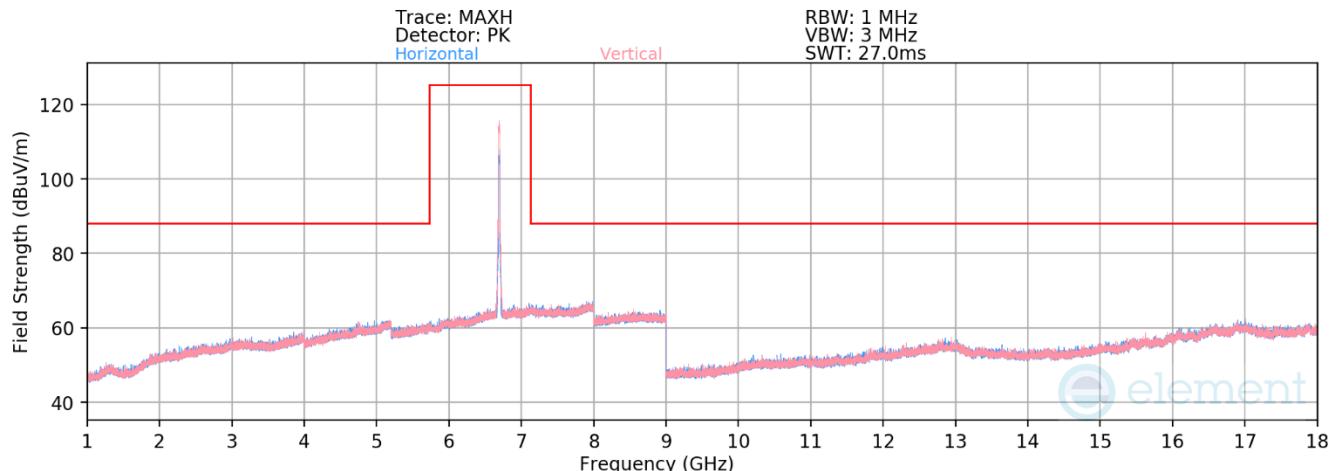

Plot 7-281. Radiated Spurious Emissions 1-18GHz SDM Diversity (802.11ax – Ch. 149 – RU242)

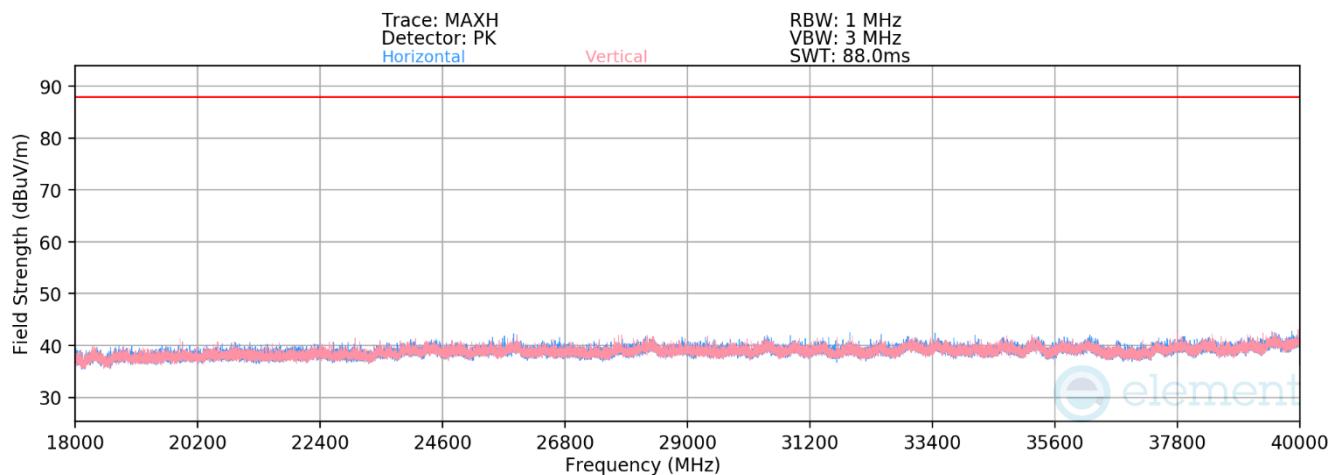


Plot 7-282. Radiated Spurious Emissions 18-40GHz SDM Diversity (802.11ax – Ch. 149 – RU242)

Mode:	802.11ax
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6695MHz
Channel:	149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
* 13390.00	Average	H	-	-	-85.47	22.35	43.89	53.98	-10.09
* 13390.00	Peak	H	-	-	-74.08	22.35	55.27	73.98	-18.71

Table 7-93. Radiated Spurious Emission Measurements SDM Diversity – RU242

FCC ID: BCGA3269 IC: 579C-A3269	MEASUREMENT REPORT (CERTIFICATION)					Approved by: Technical Manager
Test Report S/N: 1C2410210075-25.BCG	Test Dates: 10/25/2024 - 1/15/2025	EUT Type: Tablet Device				Page 152 of 209

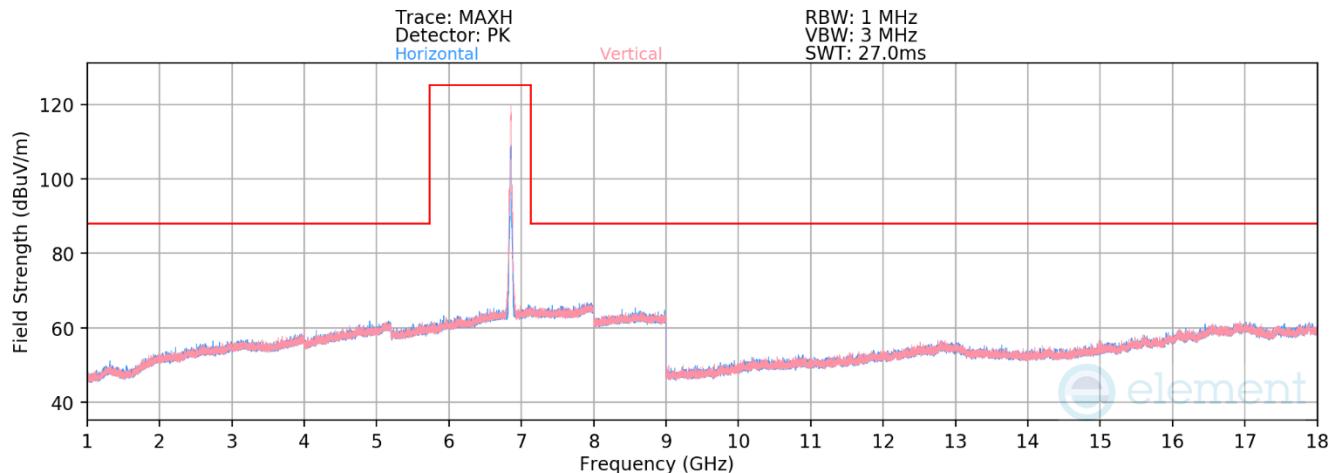

Plot 7-283. Radiated Spurious Emissions 1-18GHz SDM Diversity (802.11ax – Ch. 181 – RU242)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6855MHz
 Channel: 181

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
13710.00	Average	V	-	-	-85.47	21.75	43.27	68.23	-24.96
13710.00	Peak	V	-	-	-73.96	21.70	54.74	88.23	-33.49

Table 7-94. Radiated Spurious Emission Measurements SDM Diversity – RU242


FCC ID: BCGA3269 IC: 579C-A3269	 MEASUREMENT REPORT (CERTIFICATION)				Approved by: Technical Manager
Test Report S/N: 1C2410210075-25.BCG	Test Dates: 10/25/2024 - 1/15/2025	EUT Type: Tablet Device			

7.7.3 Antenna 5T Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

RU106


Mode: 802.11ax OFDMA
 Transfer Rate: MCS11
 RU Index: 53
 Distance of Measurements: 3 Meters
 Operating Frequency: 6115MHz
 Channel: 33

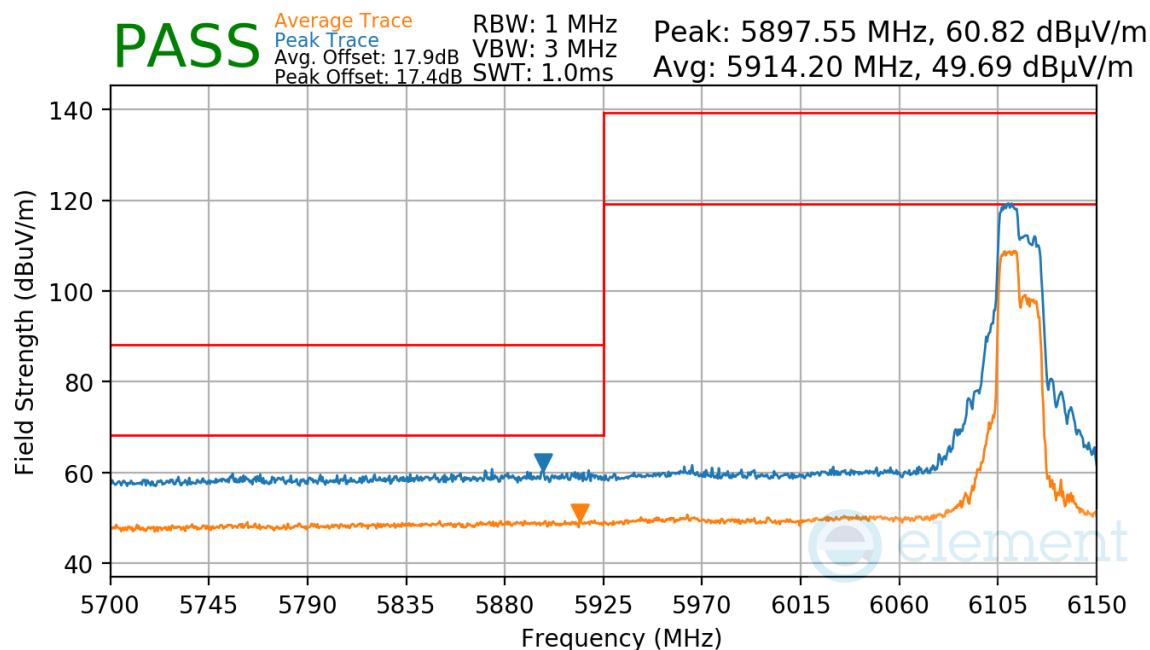

FCC ID: BCGA3269 IC: 579C-A3269	 element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-25.BCG	Test Dates: 10/25/2024 - 1/15/2025	EUT Type: Tablet Device		Page 154 of 209

RU242

Mode: 802.11ax OFDMA
 Transfer Rate: MCS11
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 6115MHz
 Channel: 33

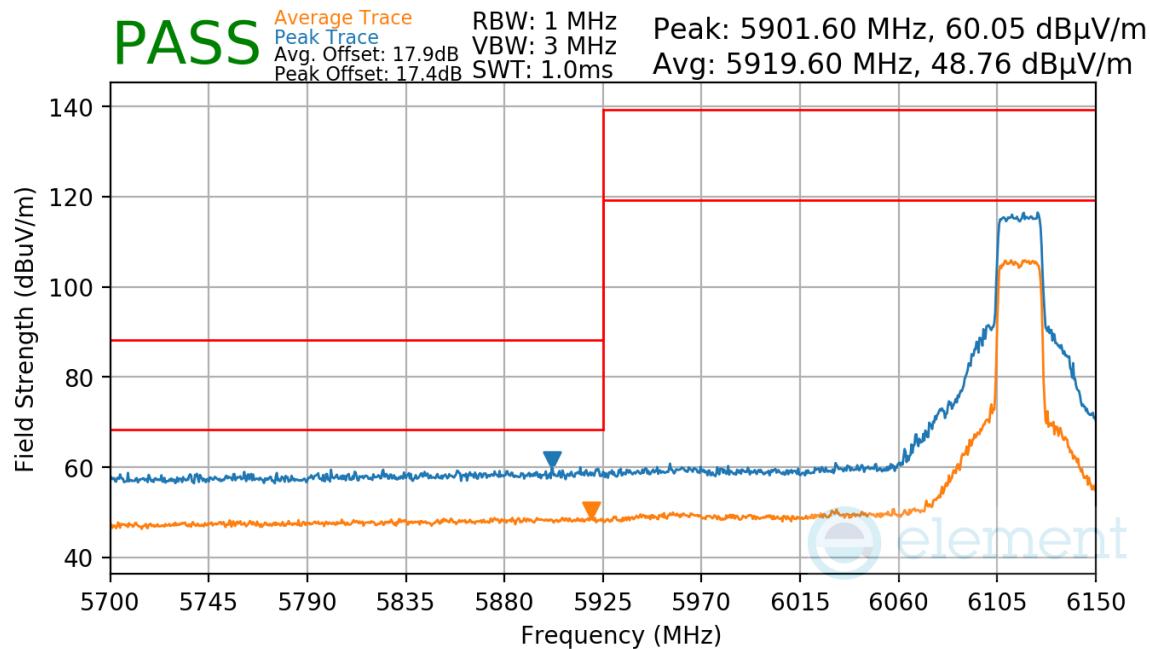


FCC ID: BCGA3269 IC: 579C-A3269	 element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-25.BCG	Test Dates: 10/25/2024 - 1/15/2025	EUT Type: Tablet Device	Page 155 of 209	

7.7.4 Antenna 5T Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

RU106


Mode:	802.11ax OFDMA
Transfer Rate:	MCS11
RU Index:	53
Distance of Measurements:	3 Meters
Operating Frequency:	6125MHz
Channel:	35

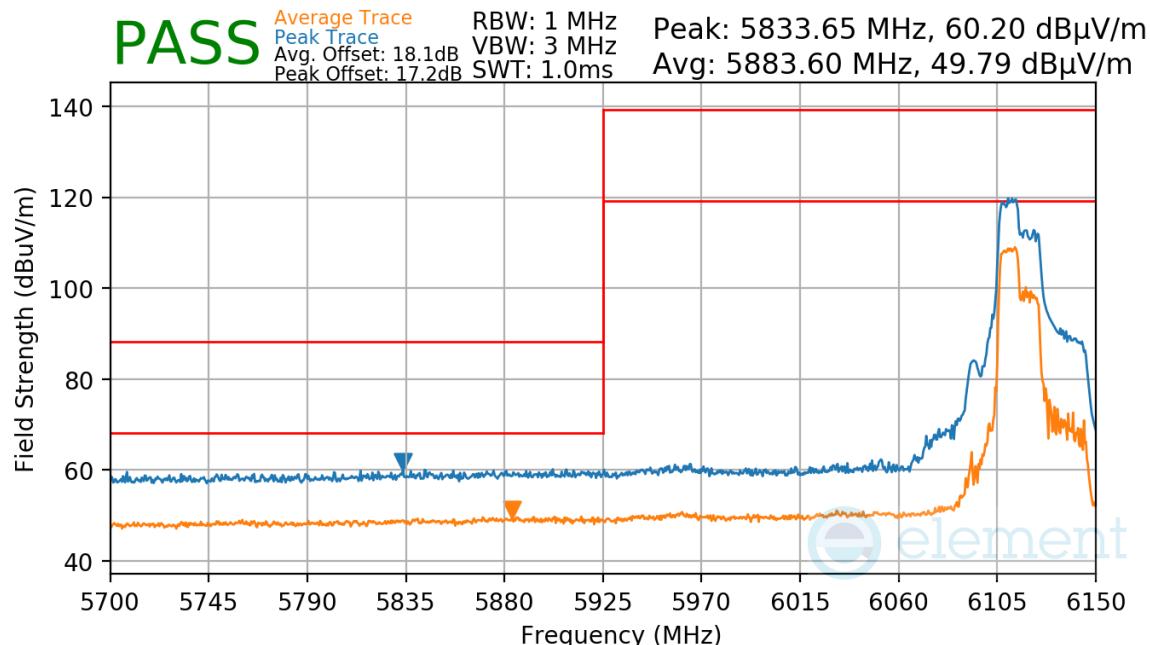

FCC ID: BCGA3269 IC: 579C-A3269	 element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-25.BCG	Test Dates: 10/25/2024 - 1/15/2025	EUT Type: Tablet Device	Page 156 of 209	

RU484

Mode: 802.11ax OFDMA
 Transfer Rate: MCS11
 RU Index: 65
 Distance of Measurements: 3 Meters
 Operating Frequency: 6125MHz
 Channel: 35

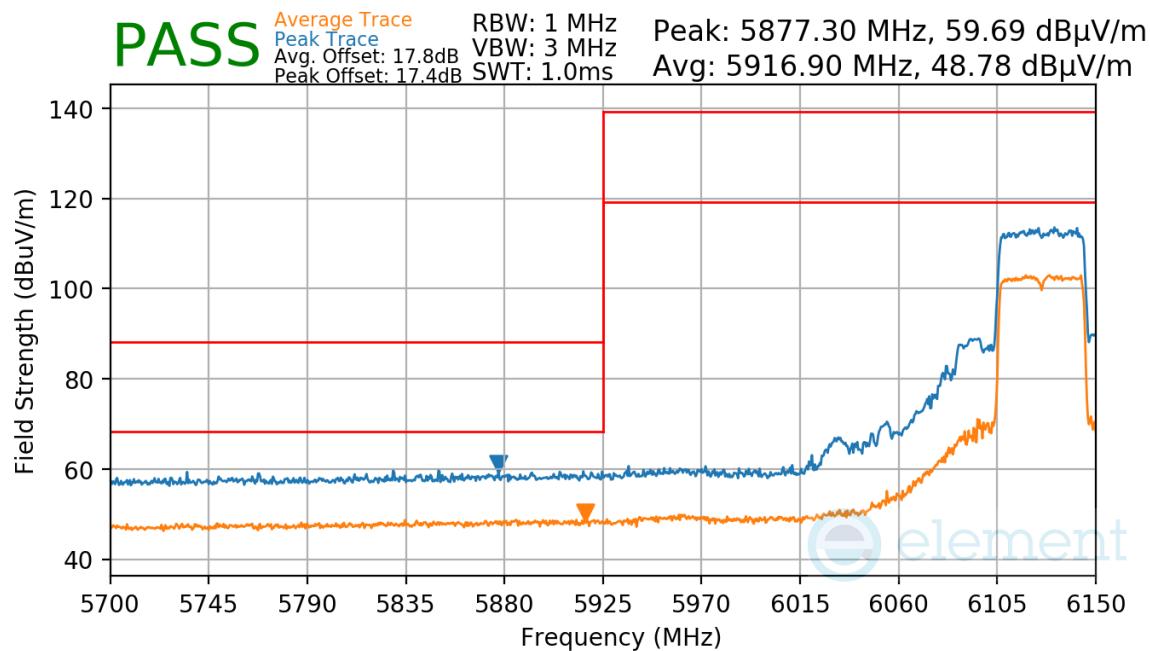

Plot 7-287 Antenna 5T Radiated Lower Band Edge (Peak & Average – UNII Band 5)


FCC ID: BCGA3269 IC: 579C-A3269	 element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-25.BCG	Test Dates: 10/25/2024 - 1/15/2025	EUT Type: Tablet Device	Page 157 of 209	

7.7.5 Antenna 5T Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

RU106


Mode:	802.11ax OFDMA
Transfer Rate:	MCS11
RU Index:	53
Distance of Measurements:	3 Meters
Operating Frequency:	6145MHz
Channel:	39

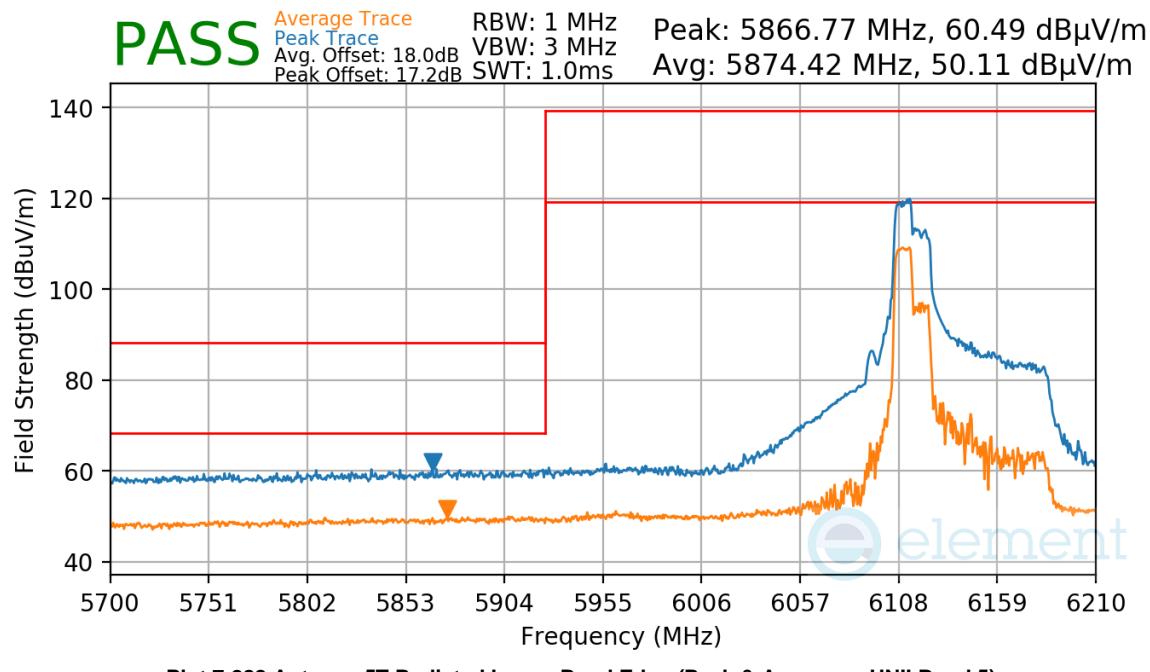

FCC ID: BCGA3269 IC: 579C-A3269	 element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-25.BCG	Test Dates: 10/25/2024 - 1/15/2025	EUT Type: Tablet Device		Page 158 of 209

RU996

Mode: 802.11ax OFDMA
 Transfer Rate: MCS11
 RU Index: 67
 Distance of Measurements: 3 Meters
 Operating Frequency: 6145MHz
 Channel: 39

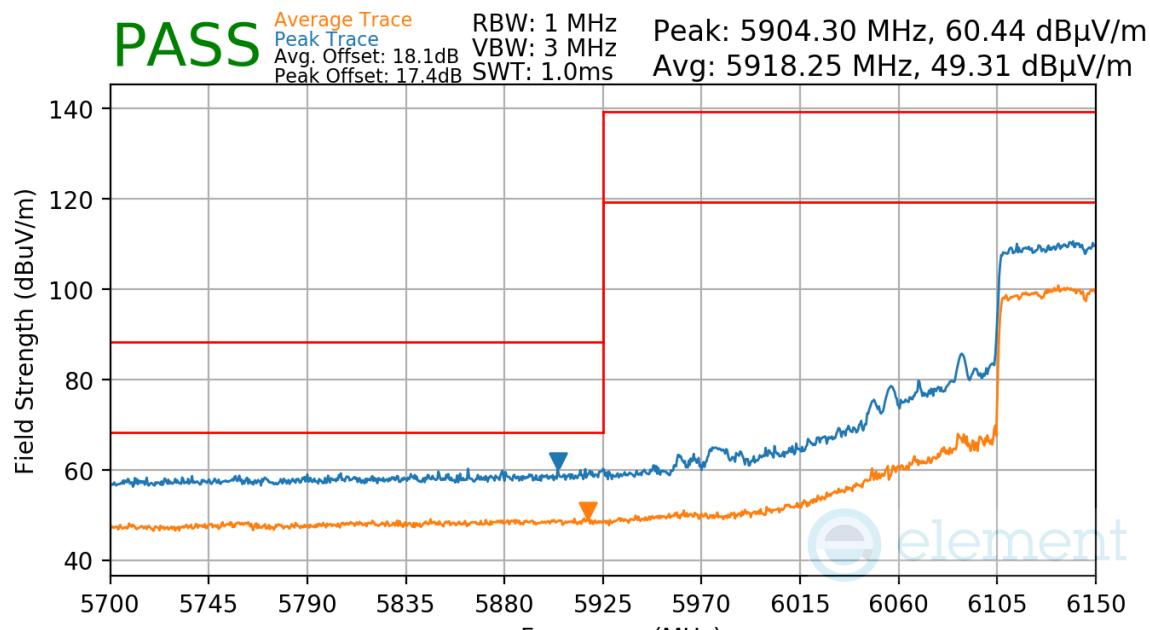

Plot 7-289 Antenna 5T Radiated Lower Band Edge (Peak & Average – UNII Band 5)


FCC ID: BCGA3269 IC: 579C-A3269	 element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-25.BCG	Test Dates: 10/25/2024 - 1/15/2025	EUT Type: Tablet Device		Page 159 of 209

7.7.6 Antenna 5T Radiated Band Edge Measurements (160MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

RU106


Mode:	802.11ax OFDMA
Transfer Rate:	MCS11
RU Index:	53
Distance of Measurements:	3 Meters
Operating Frequency:	6145MHz
Channel:	47

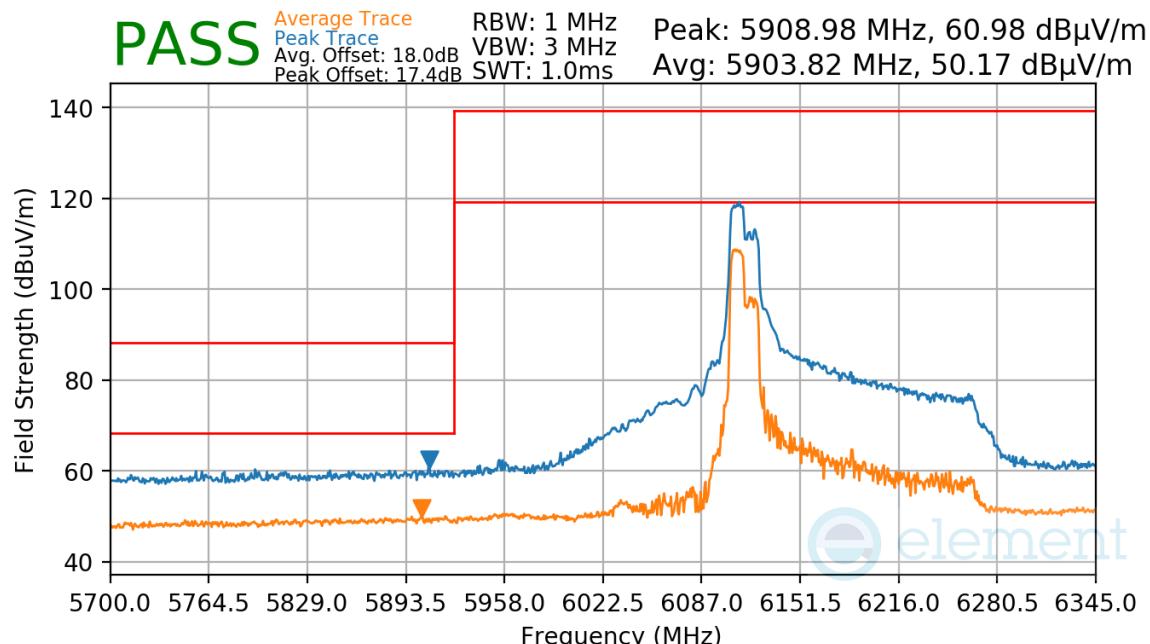

FCC ID: BCGA3269 IC: 579C-A3269	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-25.BCG	Test Dates: 10/25/2024 - 1/15/2025	EUT Type: Tablet Device	Page 160 of 209

RU996x2

Mode: 802.11ax OFDMA
 Transfer Rate: MCS11
 RU Index: 68
 Distance of Measurements: 3 Meters
 Operating Frequency: 6145MHz
 Channel: 47

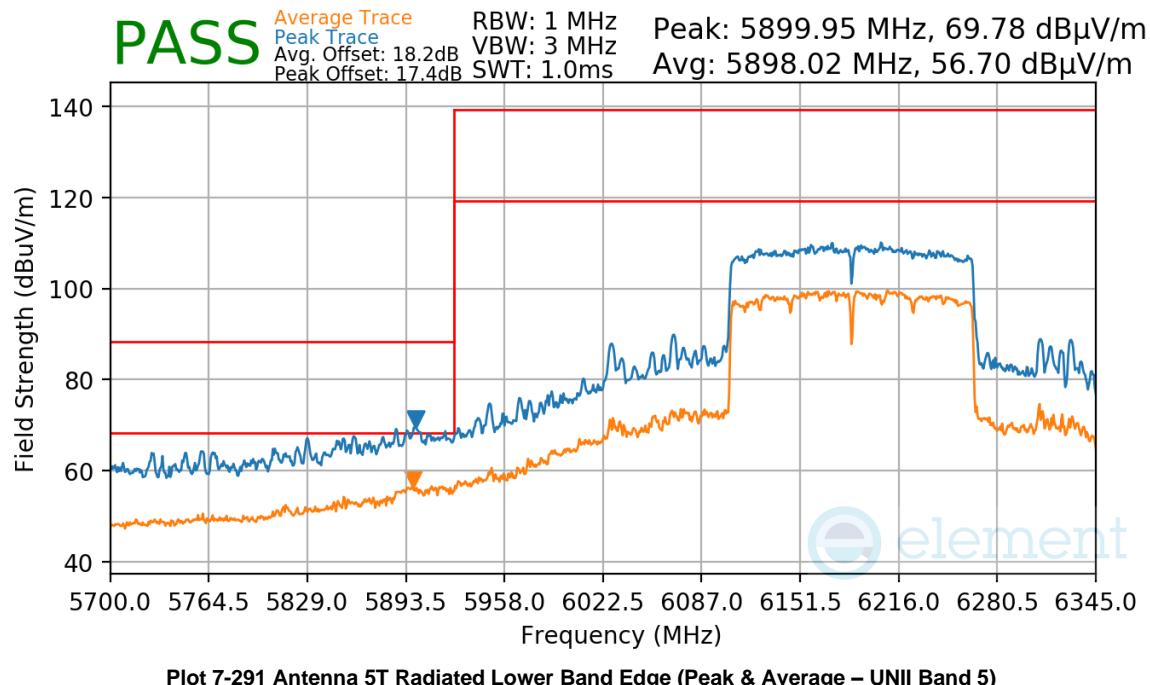


FCC ID: BCGA3269 IC: 579C-A3269	 element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-25.BCG	Test Dates: 10/25/2024 - 1/15/2025	EUT Type: Tablet Device		Page 161 of 209

7.7.7 Antenna 3b Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

RU106


Mode: 802.11ax OFDMA
 Transfer Rate: MCS11
 RU Index: 53
 Distance of Measurements: 3 Meters
 Operating Frequency: 6115MHz
 Channel: 33

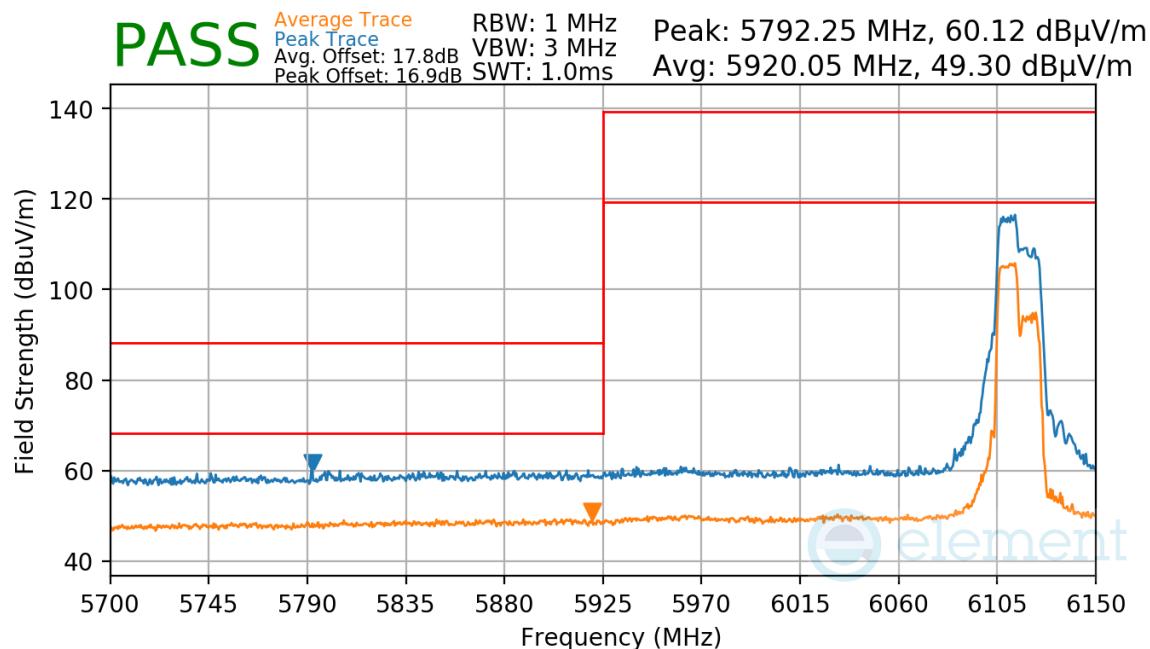

FCC ID: BCGA3269 IC: 579C-A3269	 element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-25.BCG	Test Dates: 10/25/2024 - 1/15/2025	EUT Type: Tablet Device	Page 162 of 209	

RU242

Mode: 802.11ax OFDMA
 Transfer Rate: MCS11
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 6115MHz
 Channel: 33

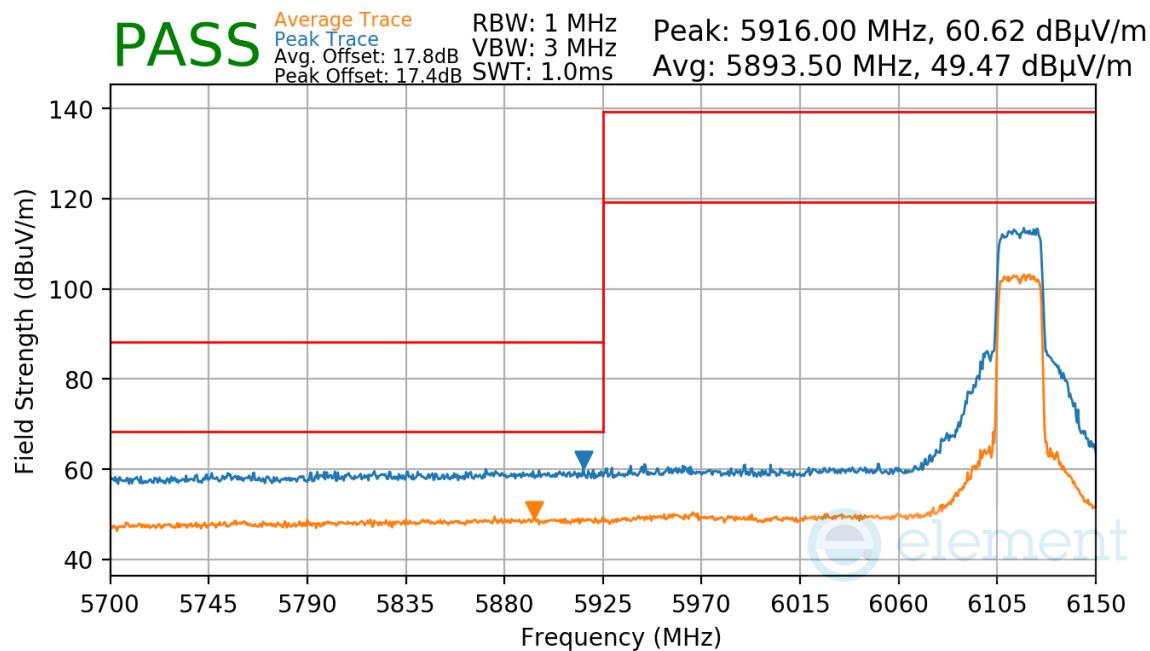

Plot 7-293 Antenna 3b Radiated Lower Band Edge (Peak & Average – UNII Band 5)


FCC ID: BCGA3269 IC: 579C-A3269	 element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-25.BCG	Test Dates: 10/25/2024 - 1/15/2025	EUT Type: Tablet Device	Page 163 of 209	

7.7.8 Antenna 3b Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

RU106


Mode:	802.11ax OFDMA
Transfer Rate:	MCS11
RU Index:	53
Distance of Measurements:	3 Meters
Operating Frequency:	6125MHz
Channel:	35

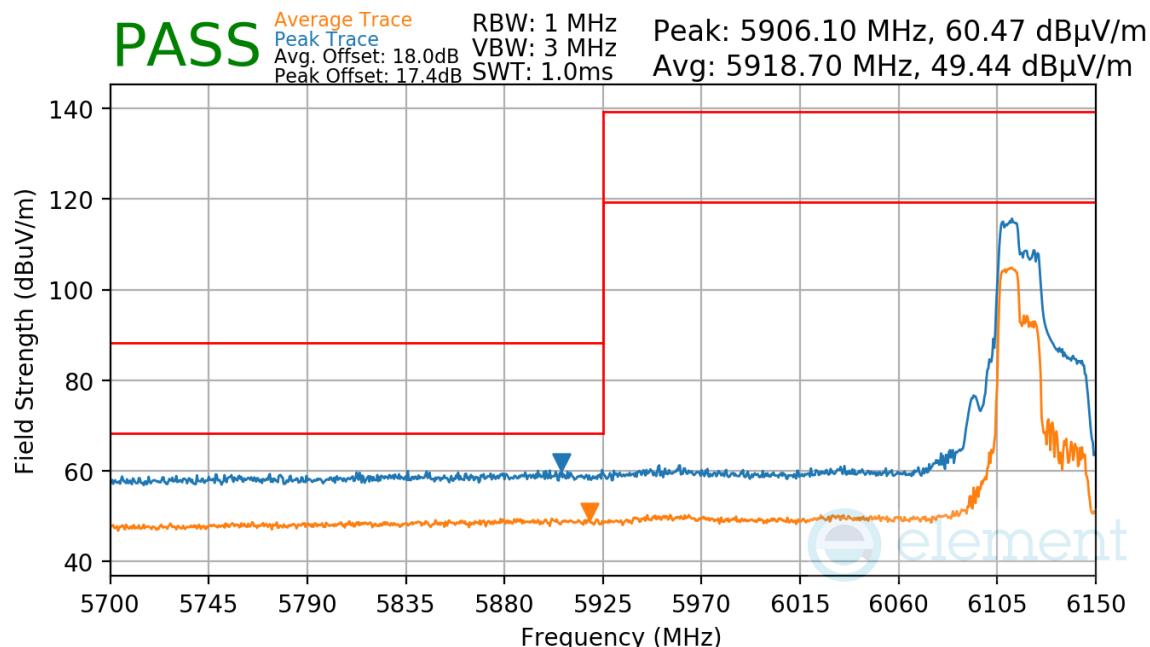

FCC ID: BCGA3269 IC: 579C-A3269	 element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-25.BCG	Test Dates: 10/25/2024 - 1/15/2025	EUT Type: Tablet Device	Page 164 of 209	

RU484

Mode: 802.11ax OFDMA
 Transfer Rate: MCS11
 RU Index: 65
 Distance of Measurements: 3 Meters
 Operating Frequency: 6125MHz
 Channel: 35

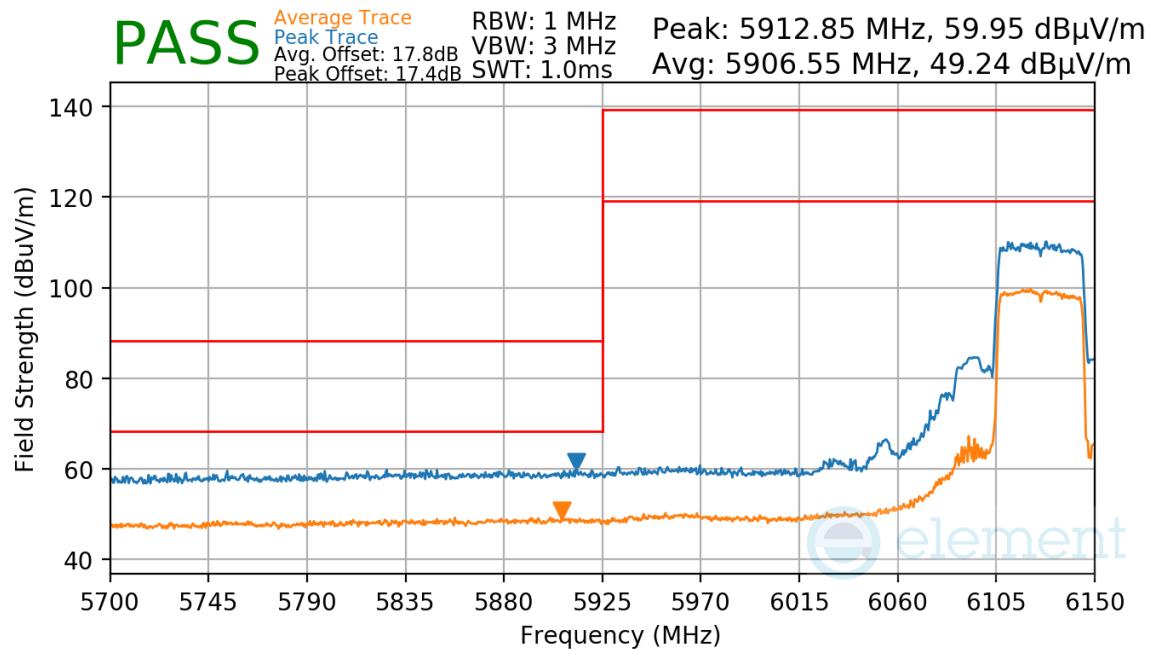

Plot 7-295 Antenna 3b Radiated Lower Band Edge (Peak & Average – UNII Band 5)


FCC ID: BCGA3269 IC: 579C-A3269	 element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-25.BCG	Test Dates: 10/25/2024 - 1/15/2025	EUT Type: Tablet Device		Page 165 of 209

7.7.9 Antenna 3b Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

RU106


Mode:	802.11ax OFDMA
Transfer Rate:	MCS11
RU Index:	53
Distance of Measurements:	3 Meters
Operating Frequency:	6145MHz
Channel:	39

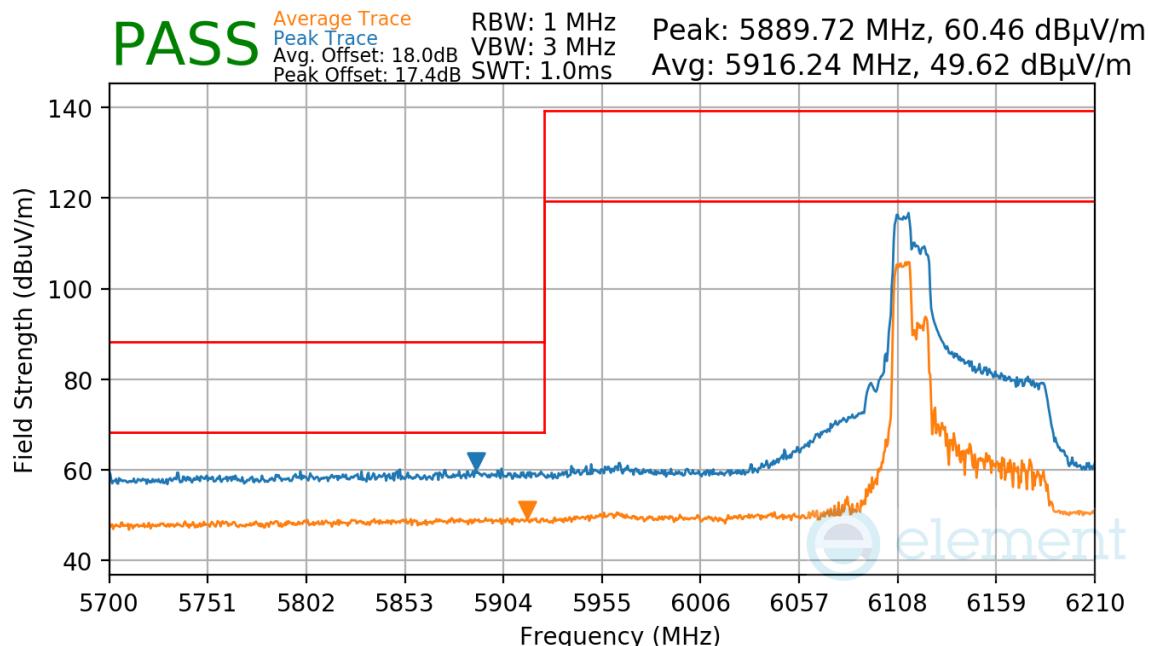

FCC ID: BCGA3269 IC: 579C-A3269	 element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-25.BCG	Test Dates: 10/25/2024 - 1/15/2025	EUT Type: Tablet Device	Page 166 of 209	

RU996

Mode: 802.11ax OFDMA
 Transfer Rate: MCS11
 RU Index: 67
 Distance of Measurements: 3 Meters
 Operating Frequency: 6145MHz
 Channel: 39

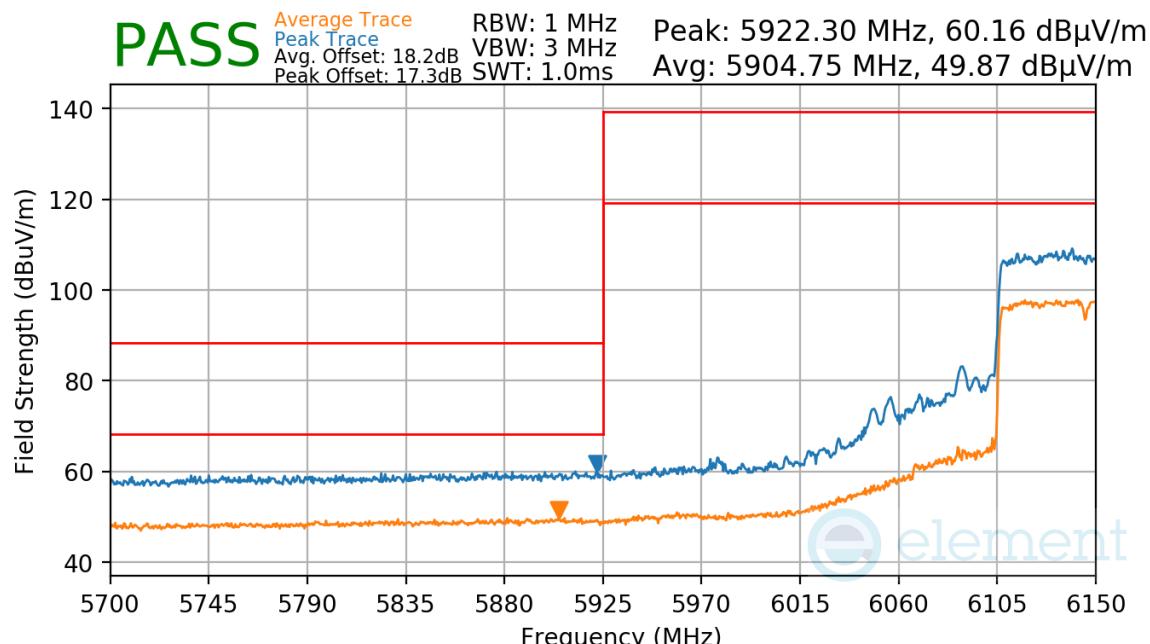

Plot 7-297 Antenna 3b Radiated Lower Band Edge (Peak & Average – UNII Band 5)


FCC ID: BCGA3269 IC: 579C-A3269	 element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-25.BCG	Test Dates: 10/25/2024 - 1/15/2025	EUT Type: Tablet Device	Page 167 of 209	

7.7.10 Antenna 3b Radiated Band Edge Measurements (160MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

RU106


Mode:	802.11ax OFDMA
Transfer Rate:	MCS11
RU Index:	53
Distance of Measurements:	3 Meters
Operating Frequency:	6145MHz
Channel:	47

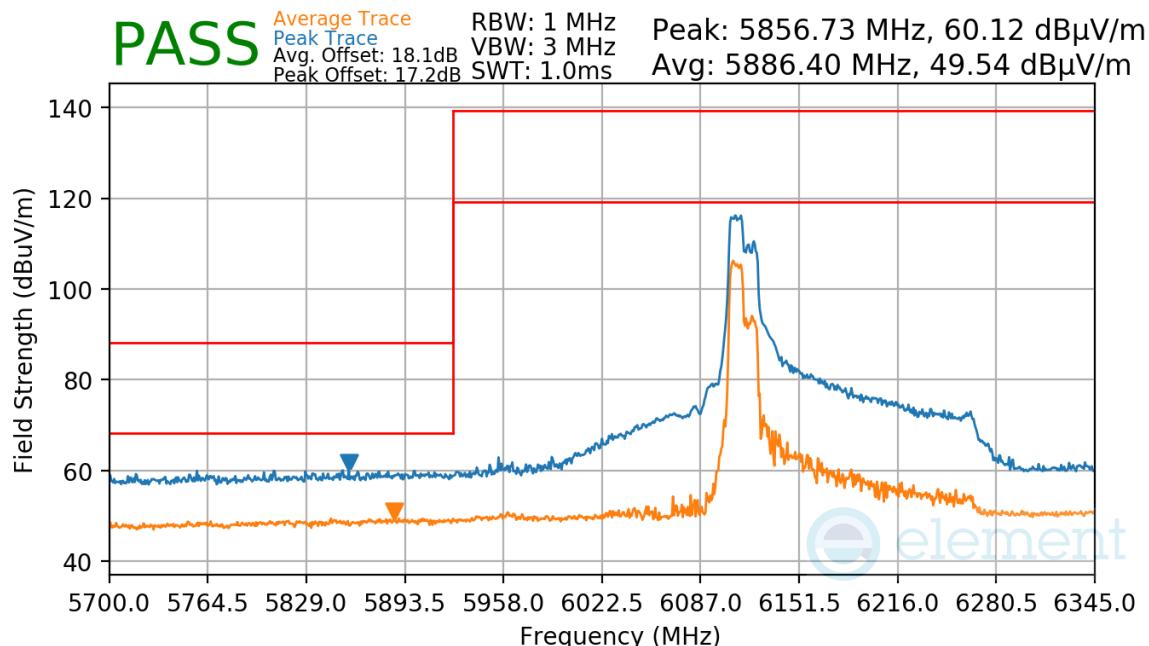

FCC ID: BCGA3269 IC: 579C-A3269	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-25.BCG	Test Dates: 10/25/2024 - 1/15/2025	EUT Type: Tablet Device	Page 168 of 209

RU996x2

Mode: 802.11ax OFDMA
 Transfer Rate: MCS11
 RU Index: 68
 Distance of Measurements: 3 Meters
 Operating Frequency: 6145MHz
 Channel: 47

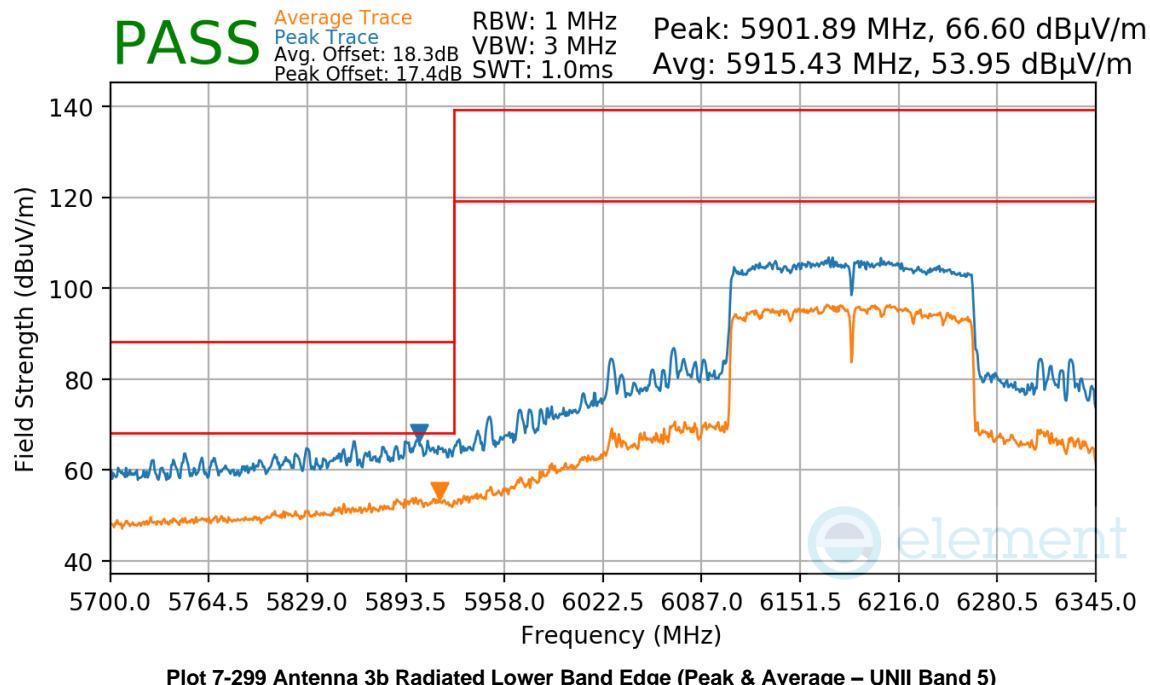

FCC ID: BCGA3269 IC: 579C-A3269	 element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-25.BCG	Test Dates: 10/25/2024 - 1/15/2025	EUT Type: Tablet Device		Page 169 of 209