



2.9.7 Test Results

6 GHz WLAN


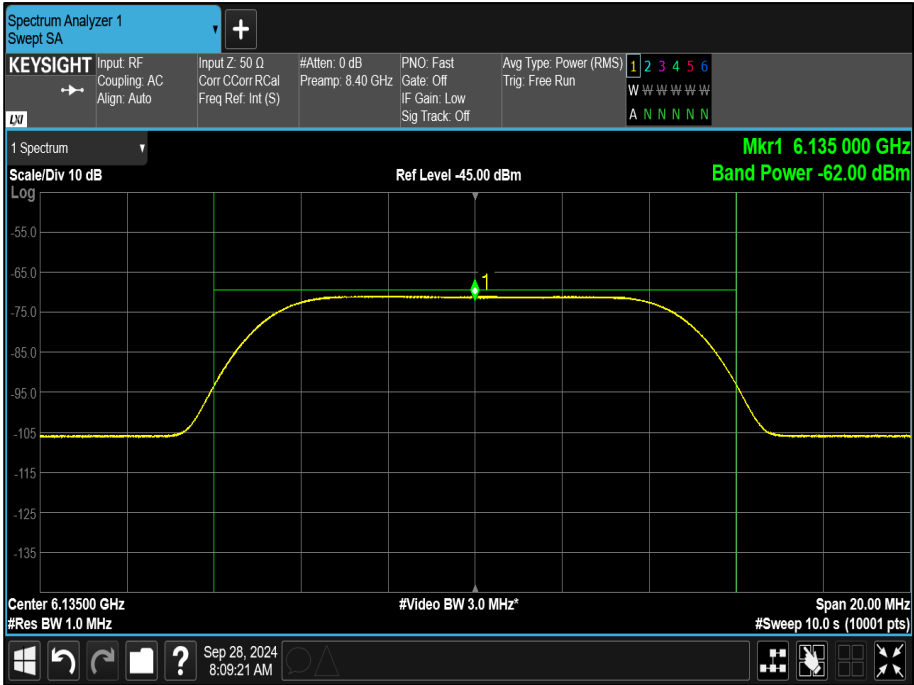


Figure 345 - Example of AWGN Signal

Table 345 - U-NII-5, Minimum Bandwidth





Parameter	Results		
U-NII Band	5	5	5
Channel Number	47	47	47
Bandwidth (MHz)	160	160	160
DUT Centre Frequency (MHz)	6185	6185	6185
AWGN Centre Frequency (MHz)	6110	6110	6110
AWGN Signal Power (dBm)	-69.60	-69.41	-69.22
Antenna Gain (dBi)	1.10	1.10	1.10
Adjusted Power (dBm)	-70.70	-70.51	-70.32
Detection Limit (dBm)	-62.0	-62.0	-62.0
EUT Tx Status (OFF/Minimal/ON)	ON	Minimal	OFF

Table 346 - U-NII-5, Maximum Bandwidth (AWGN Low)

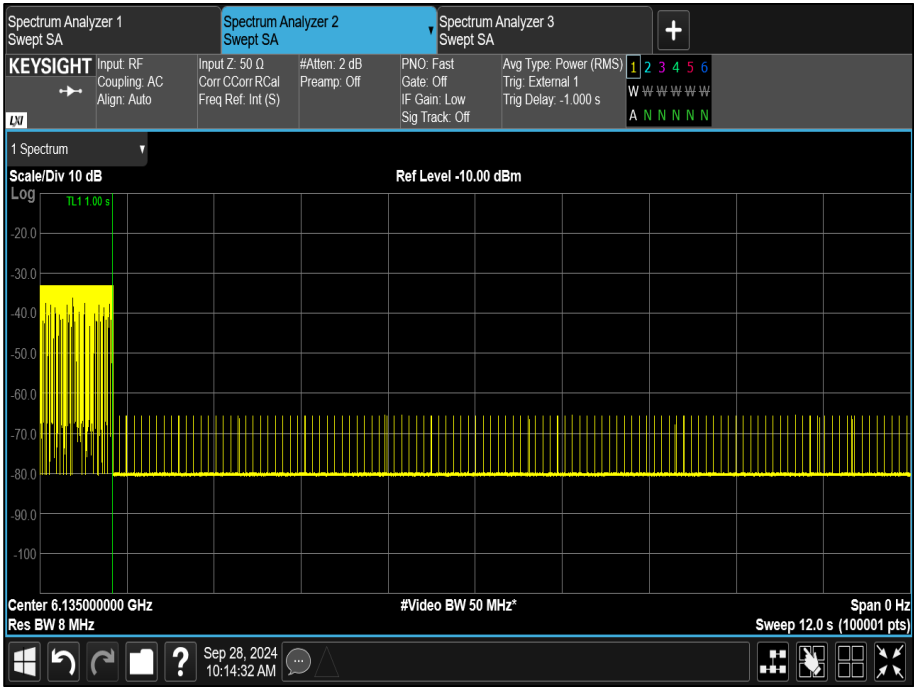


Figure 347 - U-NII-5, Minimum Bandwidth (AWGN Low)



Parameter	Results		
U-NII Band	5	5	5
Channel Number	47	47	47
Bandwidth (MHz)	160	160	160
DUT Centre Frequency (MHz)	6185	6185	6185
AWGN Centre Frequency (MHz)	6185	6185	6185
AWGN Signal Power (dBm)	-73.34	-71.63	-69.06
Antenna Gain (dBi)	1.10	1.10	1.10
Adjusted Power (dBm)	-74.44	-72.73	-70.16
Detection Limit (dBm)	-62.0	-62.0	-62.0
EUT Tx Status (OFF/Minimal/ON)	ON	Minimal	OFF

Table 347 - U-NII-5, Maximum Bandwidth (AWGN Mid)



Figure 348 - U-NII-5, Minimum Bandwidth (AWGN Mid)



Parameter	Results		
U-NII Band	5	5	5
Channel Number	47	47	47
Bandwidth (MHz)	160	160	160
DUT Centre Frequency (MHz)	6185	6185	6185
AWGN Centre Frequency (MHz)	6260	6260	6260
AWGN Signal Power (dBm)	-69.48	-68.97	-67.87
Antenna Gain (dBi)	1.10	1.10	1.10
Adjusted Power (dBm)	-70.58	-70.07	-68.97
Detection Limit (dBm)	-62.0	-62.0	-62.0
EUT Tx Status (OFF/Minimal/ON)	ON	Minimal	OFF

Table 348 - U-NII-5, Maximum Bandwidth (AWGN High)



Figure 349 - U-NII-5, Minimum Bandwidth (AWGN High)



Parameter	Results		
U-NII Band	6	6	6
Channel Number	101	101	101
Bandwidth (MHz)	20	20	20
DUT Centre Frequency (MHz)	6455	6455	6455
AWGN Centre Frequency (MHz)	6455	6455	6455
AWGN Signal Power (dBm)	-74.38	-73.38	-69.87
Antenna Gain (dBi)	1.10	1.10	1.10
Adjusted Power (dBm)	-75.48	-74.48	-70.97
Detection Limit (dBm)	-62.0	-62.0	-62.0
EUT Tx Status (OFF/Minimal/ON)	ON	Minimal	OFF

Table 349 - U-NII-6, Minimum Bandwidth

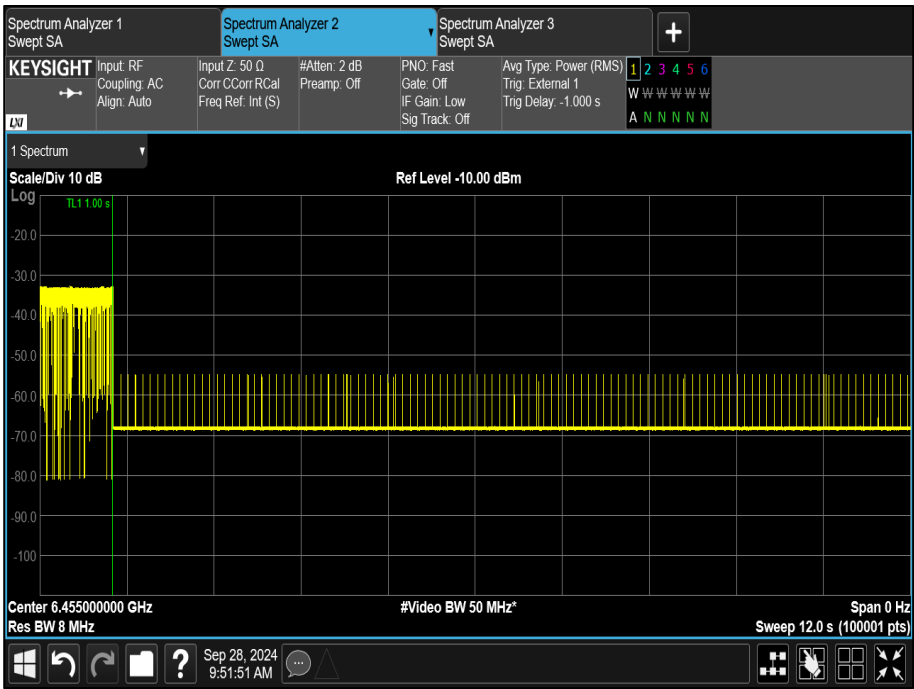


Figure 350 - U-NII-6, Minimum Bandwidth



Parameter	Results		
U-NII Band	6	6	6
Channel Number	111	111	111
Bandwidth (MHz)	160	160	160
DUT Centre Frequency (MHz)	6505	6505	6505
AWGN Centre Frequency (MHz)	6430	6430	6430
AWGN Signal Power (dBm)	-70.59	-69.78	-69.39
Antenna Gain (dBi)	1.10	1.10	1.10
Adjusted Power (dBm)	-71.69	-70.88	-70.49
Detection Limit (dBm)	-62.0	-62.0	-62.0
EUT Tx Status (OFF/Minimal/ON)	ON	Minimal	OFF

Table 350 - U-NII-6, Maximum Bandwidth (AWGN Low)



Figure 351 - U-NII-6, Minimum Bandwidth (AWGN Low)



Parameter	Results		
U-NII Band	6	6	6
Channel Number	111	111	111
Bandwidth (MHz)	160	160	160
DUT Centre Frequency (MHz)	6505	6505	6505
AWGN Centre Frequency (MHz)	6505	6505	6505
AWGN Signal Power (dBm)	-72.41	-71.10	-65.84
Antenna Gain (dBi)	1.10	1.10	1.10
Adjusted Power (dBm)	-73.51	-72.20	-66.94
Detection Limit (dBm)	-62.0	-62.0	-62.0
EUT Tx Status (OFF/Minimal/ON)	ON	Minimal	OFF

Table 351 - U-NII-6, Maximum Bandwidth (AWGN Mid)

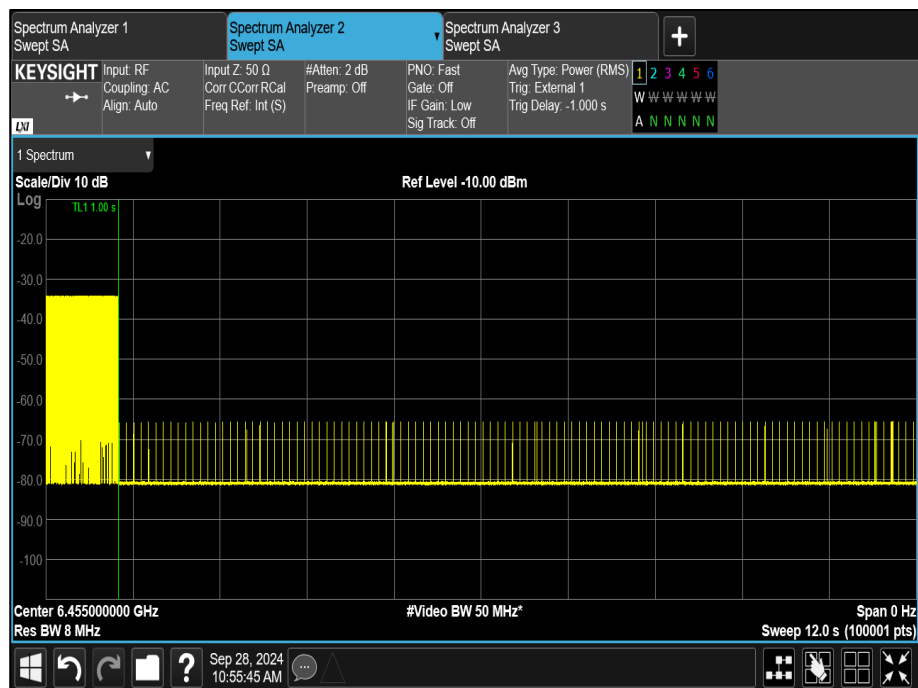


Figure 352 - U-NII-6, Minimum Bandwidth (AWGN Mid)



Parameter	Results		
U-NII Band	6	6	6
Channel Number	111	111	111
Bandwidth (MHz)	160	160	160
DUT Centre Frequency (MHz)	6505	6505	6505
AWGN Centre Frequency (MHz)	6580	6580	6580
AWGN Signal Power (dBm)	-67.34	-66.94	-66.74
Antenna Gain (dBi)	1.10	1.10	1.10
Adjusted Power (dBm)	-68.44	-68.04	-67.84
Detection Limit (dBm)	-62.0	-62.0	-62.0
EUT Tx Status (OFF/Minimal/ON)	ON	Minimal	OFF

Table 352 - U-NII-6, Maximum Bandwidth (AWGN High)



Figure 353 - U-NII-6, Minimum Bandwidth (AWGN High)



Parameter	Results		
U-NII Band	7	7	7
Channel Number	133	133	133
Bandwidth (MHz)	20	20	20
DUT Centre Frequency (MHz)	6615	6615	6615
AWGN Centre Frequency (MHz)	6615	6615	6615
AWGN Signal Power (dBm)	-75.10	-74.02	-71.63
Antenna Gain (dBi)	1.10	1.10	1.10
Adjusted Power (dBm)	-76.20	-75.12	-72.73
Detection Limit (dBm)	-62.0	-62.0	-62.0
EUT Tx Status (OFF/Minimal/ON)	ON	Minimal	OFF

Table 353 - U-NII-7, Minimum Bandwidth

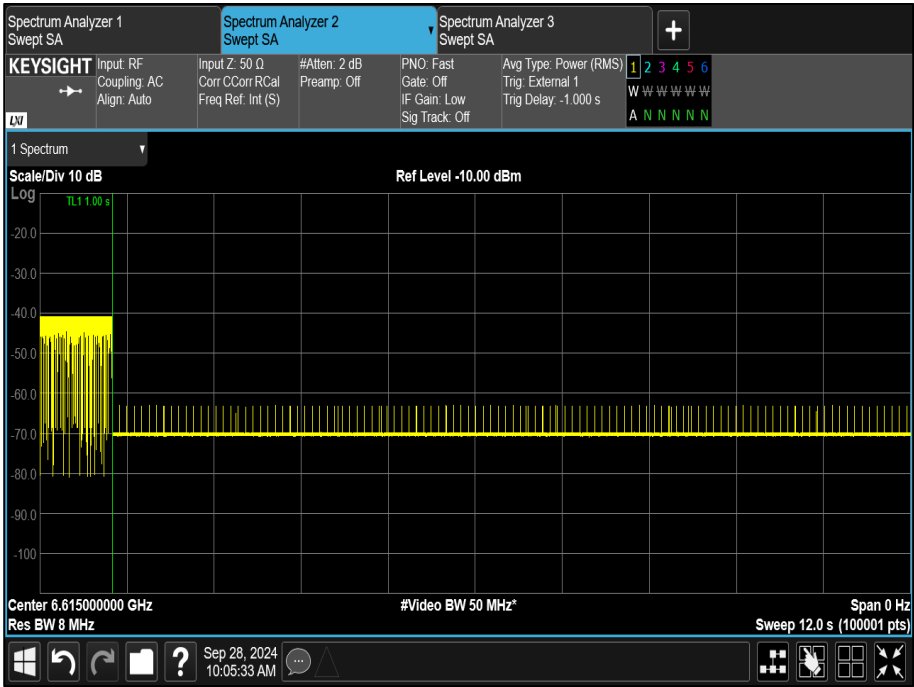


Figure 354 - U-NII-7, Minimum Bandwidth



Parameter	Results		
U-NII Band	7	7	7
Channel Number	143	143	143
Bandwidth (MHz)	160	160	160
DUT Centre Frequency (MHz)	6665	6665	6665
AWGN Centre Frequency (MHz)	6590	6590	6590
AWGN Signal Power (dBm)	-69.39	-68.69	-68.40
Antenna Gain (dBi)	1.10	1.10	1.10
Adjusted Power (dBm)	-70.49	-69.79	-69.50
Detection Limit (dBm)	-62.0	-62.0	-62.0
EUT Tx Status (OFF/Minimal/ON)	ON	Minimal	OFF

Table 354 - U-NII-7, Maximum Bandwidth (AWGN Low)



Figure 355 - U-NII-7, Minimum Bandwidth (AWGN Low)



Parameter	Results		
U-NII Band	7	7	7
Channel Number	143	143	143
Bandwidth (MHz)	160	160	160
DUT Centre Frequency (MHz)	6665	6665	6665
AWGN Centre Frequency (MHz)	6665	6665	6665
AWGN Signal Power (dBm)	-73.19	-71.49	-69.60
Antenna Gain (dBi)	1.10	1.10	1.10
Adjusted Power (dBm)	-74.29	-72.59	-70.70
Detection Limit (dBm)	-62.0	-62.0	-62.0
EUT Tx Status (OFF/Minimal/ON)	ON	Minimal	OFF

Table 355 - U-NII-7, Maximum Bandwidth (AWGN Mid)



Figure 356 - U-NII-7, Minimum Bandwidth (AWGN Mid)



Parameter	Results		
U-NII Band	7	7	7
Channel Number	143	143	143
Bandwidth (MHz)	160	160	160
DUT Centre Frequency (MHz)	6665	6665	6665
AWGN Centre Frequency (MHz)	6740	6740	6740
AWGN Signal Power (dBm)	-68.41	-67.46	-65.14
Antenna Gain (dBi)	1.10	1.10	1.10
Adjusted Power (dBm)	-69.51	-68.56	-66.24
Detection Limit (dBm)	-62.0	-62.0	-62.0
EUT Tx Status (OFF/Minimal/ON)	ON	Minimal	OFF

Table 356 - U-NII-7, Maximum Bandwidth (AWGN High)



Figure 357 - U-NII-7, Minimum Bandwidth (AWGN High)



Parameter	Results		
U-NII Band	8	8	8
Channel Number	197	197	197
Bandwidth (MHz)	20	20	20
DUT Centre Frequency (MHz)	6935	6935	6935
AWGN Centre Frequency (MHz)	6935	6935	6935
AWGN Signal Power (dBm)	-75.06	-74.16	-70.52
Antenna Gain (dBi)	1.10	1.10	1.10
Adjusted Power (dBm)	-76.16	-75.26	-71.62
Detection Limit (dBm)	-62.0	-62.0	-62.0
EUT Tx Status (OFF/Minimal/ON)	ON	Minimal	OFF

Table 357 - U-NII-8, Minimum Bandwidth

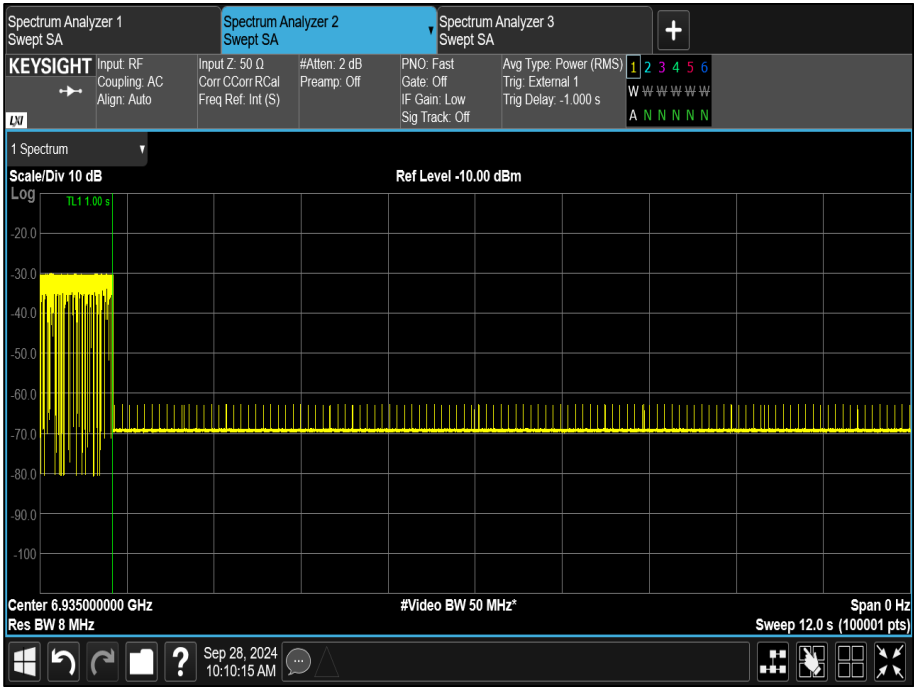


Figure 358 - U-NII-8, Minimum Bandwidth



Parameter	Results		
U-NII Band	8	8	8
Channel Number	207	207	207
Bandwidth (MHz)	160	160	160
DUT Centre Frequency (MHz)	6985	6985	6985
AWGN Centre Frequency (MHz)	6910	6910	6910
AWGN Signal Power (dBm)	-67.93	-67.23	-66.50
Antenna Gain (dBi)	1.10	1.10	1.10
Adjusted Power (dBm)	-69.03	-68.33	-67.60
Detection Limit (dBm)	-62.0	-62.0	-62.0
EUT Tx Status (OFF/Minimal/ON)	ON	Minimal	OFF

Table 358 - U-NII-8, Maximum Bandwidth (AWGN Low)



Figure 359 - U-NII-8, Minimum Bandwidth (AWGN Low)



Parameter	Results		
U-NII Band	8	8	8
Channel Number	207	207	207
Bandwidth (MHz)	160	160	160
DUT Centre Frequency (MHz)	6985	6985	6985
AWGN Centre Frequency (MHz)	6985	6985	6985
AWGN Signal Power (dBm)	-71.05	-69.68	-67.54
Antenna Gain (dBi)	1.10	1.10	1.10
Adjusted Power (dBm)	-72.15	-70.78	-68.64
Detection Limit (dBm)	-62.0	-62.0	-62.0
EUT Tx Status (OFF/Minimal/ON)	ON	Minimal	OFF

Table 359 - U-NII-8, Maximum Bandwidth (AWGN Mid)



Figure 360 - U-NII-8, Minimum Bandwidth (AWGN Mid)



Parameter	Results		
U-NII Band	8	8	8
Channel Number	207	207	207
Bandwidth (MHz)	160	160	160
DUT Centre Frequency (MHz)	6985	6985	6985
AWGN Centre Frequency (MHz)	7060	7060	7060
AWGN Signal Power (dBm)	-68.45	-67.67	-66.36
Antenna Gain (dBi)	1.10	1.10	1.10
Adjusted Power (dBm)	-69.55	-68.77	-67.46
Detection Limit (dBm)	-62.0	-62.0	-62.0
EUT Tx Status (OFF/Minimal/ON)	ON	Minimal	OFF

Table 360 - U-NII-8, Maximum Bandwidth (AWGN High)



Figure 361 - U-NII-8, Minimum Bandwidth (AWGN High)



FCC 47 CFR Part 15.407 (d)(6)

Indoor access points, subordinate devices and client devices operating in the 5.925-7.125 GHz band must employ a contention-based protocol.

KDB 987594, Limit Clause I

Indoor access points, subordinate devices and client devices operating in the 5.925-7.125 GHz band (herein referred to as unlicensed devices) are required to use technologies that include a contention-based protocol to avoid co-channel interference with incumbent devices sharing the band. To ensure incumbent co-channel operations are detected in a technology-agnostic manner, unlicensed devices are required to detect co-channel radio frequency energy (energy detect) and avoid simultaneous transmission.

Unlicensed low-power indoor devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel (in which incumbent signal is transmitted) and stay off the incumbent channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm). The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain.

To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF energy throughout their intended operating channel. For example, an 802.11 device that plans to transmit a 40 MHz- wide signal (on a primary 20 MHz channel and a secondary 20 MHz channel) must detect energy throughout the entire 40 MHz channel. Additionally, low-power indoor devices must detect co-channel energy with 90% or greater certainty.

2.9.8 Test Location and Test Equipment Used

This test was carried out in Shielded Laboratory 1.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
3.5 mm 1m Cable	Junkosha	MWX221-01000DMS	5416	12	07-Mar-2025
3.5 mm 2m Cable	Junkosha	MWX221-02000DMS	5426	12	16-May-2025
3.5 mm 2m Cable	Junkosha	MWX221-02000DMS	5427	12	23-May-2025
3.5mm Cable (1m)	Junkosha	MWX221/B	5838	12	29-Jul-2025
Vector Signal Generator	Rohde & Schwarz	SMM100A	5915	36	01-Mar-2026
WiFi 6E Tri-Band Gaming Router	Asus	GT-AXE110000	5926	-	TU
Thermohygrometer	R.S Components	1364	6352	12	13-Jun-2025
MXA Signal Analyzer	Keysight Technologies	N9020B	6415	24	22-Mar-2025
Test Coupling Network	TUV SUD	TUV_RxTest_001	6441	12	30-Apr-2025

Table 361

TU - Traceability Unscheduled



3 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

Test Name	Measurement Uncertainty
Emission Bandwidth	± 3.91 MHz
Dual Client Test	± 1.38 dB
Transmit Power Control	± 1.49 dB
Maximum Conducted Output Power	± 1.38 dB
Maximum Conducted Power Spectral Density	± 1.49 dB
Authorised Band Edges	± 6.3 dB
Spurious Radiated Emissions	30 MHz to 1 GHz: ± 5.2 dB 1 GHz to 40 GHz: ± 6.3 dB
Unwanted Emissions within the 5925-7125 MHz band	± 3.45 dB
Contention Based Protocol	Time: 0.30% Interferer BW: 267.98 kHz Interferer Level: 0.80 dB

Table 362

Measurement Uncertainty Decision Rule – Accuracy Method

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115:2021, Clause 4.4.3 (Procedure 2). The measurement results are directly compared with the test limit to determine conformance with the requirements of the standard.

Risk: The uncertainty of measurement about the measured result is negligible with regard to the final pass/fail decision. The measurement result can be directly compared with the test limit to determine conformance with the requirement (compare IEC Guide 115). The level of risk to falsely accept and falsely reject items is further described in ILAC-G8.