



KTL Dallas, Inc.

Dallas Headquarters:

802 N. Kealy
 Lewisville, TX 75057
 Tel: (972) 436-9600
 Fax: (972) 436-2667

Test Plot: Intermodulation (Voice)

Page 1 of 1


Job No.: 0L0367R Date: 04/06/01
 Specification: Temperature(°C): 22
 Tested By: David Light Relative Humidity(%) 50
 E.U.T.: MOR 801Bi Power
 Configuration: Transmit three Voice channels
 Serial Number: 0011
 Location: Lab 1 RBW: 30 kHz
 Detector Type: Peak VBW: 30 kHz

Test Equipment Used

Antenna: #N/A Directional Coupler: #N/A
 Pre-Amp: #N/A Cable #1: 1082
 Filter: #N/A Cable #2: #N/A
 Receiver: 1036 Cable #3: #N/A
 Attenuator #1: 1065 Cable #4: #N/A
 Attenuator #2: 1064 Mixer: #N/A

Additional equipment used:
 Measurement Uncertainty: #N/A

RS	Ref Lvl	-14.64 dBm	RBW	30 kHz	RF Att	20 dB
	30.2 dBm	857.21242485 MHz	VBW	30 kHz	Mixer	-20 dBm
			SWT	170 ms	Unit	dBm

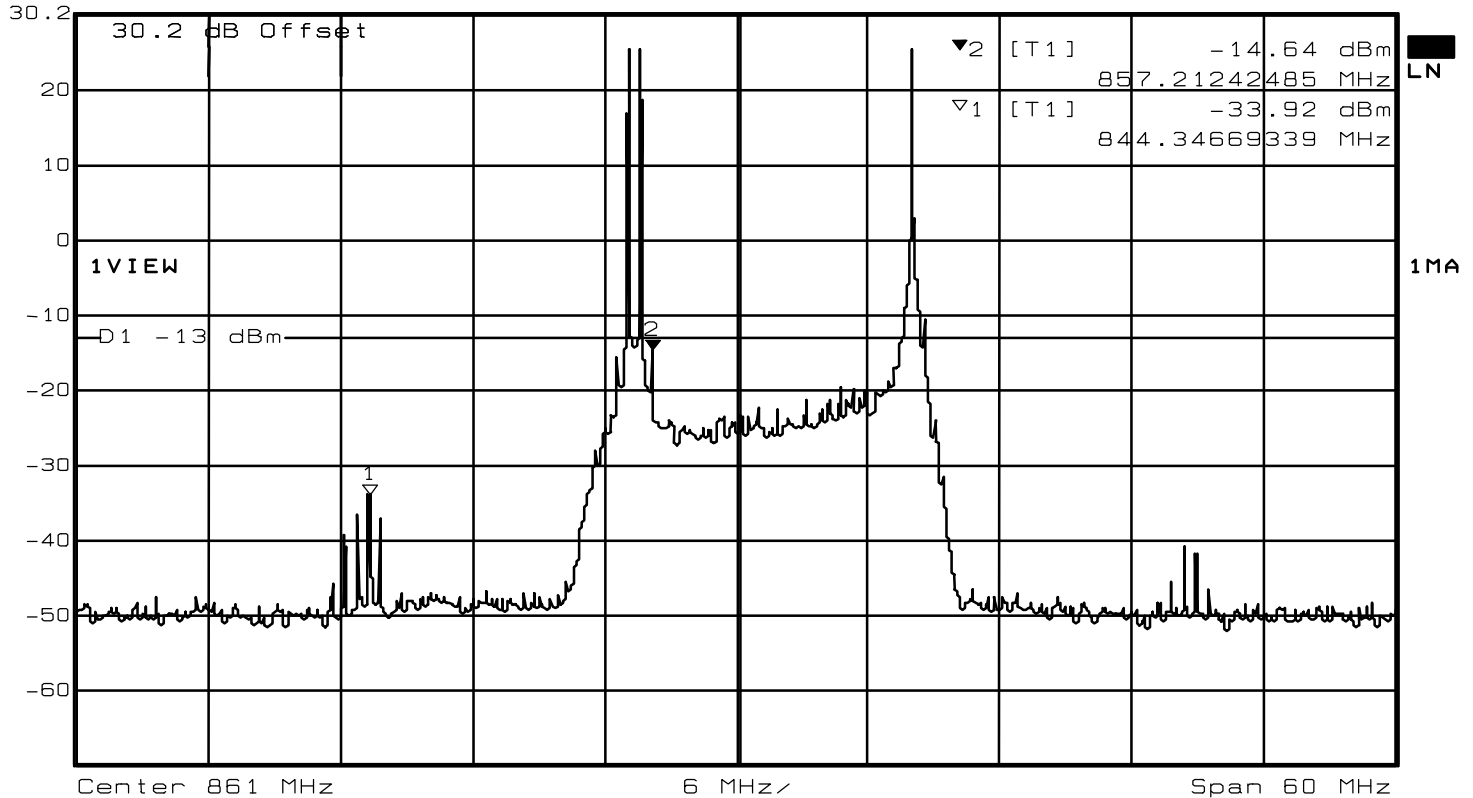

Date: 6.APR.2001 12:29:34

Notes: **MARKER 1 INDICATES HIGHEST OUT OF BAND INTERMODULATION PRODUCT**
MARKER 2 INDICATES HIGHEST INBAND INTERMODULATION PRODUCT

intermod.voice(retest)