



## HCT CO., LTD.

### CERTIFICATE OF COMPLIANCE FCC Certification

**Applicant Name:**

LG Electronics Inc.

**Date of Issue:**

June 10, 2011

**Test Site/Location:**

HCT CO., LTD., 105-1, Jang am-ri, Majang-Myeon, Icheon-si, Kyunggi-Do, Korea

**Address:**391-2, Gaeumjeong-dong, Changwon City, Gyeongnam,  
641-711, Korea**Report No.:** HCTR1106FR18**HCT FRN:** 0005866421**IC Recognition No.:** 5944A-3

<b>FCC ID:</b>	<b>BEJ-LGHA-ZNA1105</b>
<b>IC:</b>	<b>2703N-LGHAZNA1105</b>
<b>APPLICANT:</b>	<b>LG Electronics Inc.</b>

**FCC Model(s):** LGHA-ZNA1105**IC Model(s):** LGHA-ZNA1105**EUT Type:** Zigbee Dongle**Max. RF Output Power:** 18.91 dBm**Frequency Range:** 2405 MHz -2475 MHz**Modulation type** DSSS**FCC Classification:** Digital Transmission System(DTS)**FCC Rule Part(s):** Part 15.247**Engineering Statement:**

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)

**Report prepared by**  
: Jong Seok Lee**Test Engineer of RF Team****Approved by**  
: Sang Jun Lee**Manager of RF Team**

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

<b>FCC PT.15.247 TEST REPORT</b>	<b>FCC CERTIFICATION REPORT</b>			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
<b>Test Report No.</b> HCTR1106FR18	<b>Date of Issue:</b> June 10, 2011	<b>EUT Type:</b> Zigbee Dongle	<b>FCC ID:</b> BEJ-LGHA-ZNA1105	<b>IC:</b> 2703N-LGHAZNA1105

## Version

TEST REPORT NO.	DATE	DESCRIPTION
HCTR1106FR18	June 10, 2011	- First Approval Report

# Table of Contents

1. GENERAL INFORMATION .....	4
2. EUT DESCRIPTION .....	4
3. TEST METHODOLOGY .....	5
3.1 EUT CONFIGURATION .....	5
3.2 EUT EXERCISE .....	5
3.3 GENERAL TEST PROCEDURES .....	5
3.4 DESCRIPTION OF TEST MODES .....	5
4. INSTRUMENT CALIBRATION.....	6
5. FACILITIES AND ACCREDITATIONS .....	6
5.1 FACILITIES .....	6
5.2 EQUIPMENT .....	6
6. ANTENNA REQUIREMENTS .....	7
7.SUMMARY OF TEST RESULTS .....	8
8. TEST RESULT .....	9
8.1 6dB BANDWIDTH MEASUREMENT .....	9
8.2 OUTPUT POWER MEASUREMENT .....	1 2
8.3 POWER SPECTRAL DENSITY .....	1 8
8.4 OUT OF BAND EMISSIONS AT THE BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS ...	2 1
8.5 RADIATED MEASUREMENT.....	2 7
8.5.1 RADIATED SPURIOUS EMISSIONS.....	2 7
8.5.2 RADIATED RESTRICTED BAND EDGE MEASUREMENTS .....	3 5
8.5.3 RECEIVER SPURIOUS EMISSIONS .....	3 6
8.6 POWERLINE CONDUCTED EMISSIONS .....	3 7
9. LIST OF TEST EQUIPMENT .....	4 2

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1106FR18	Date of Issue: June 10,2011	EUT Type: Zigbee Dongle	FCC ID: BEJ-LGHA-ZNA1105	IC: 2703N-LGHAZNA1105

## 1. GENERAL INFORMATION

**Applicant:** LG Electronics Inc.  
**Address:** 391-2, Gaeumjeong-dong, Changwon City, Gyeongnam, 641-711, Korea  
  
**FCC ID:** BEJ-LGHA-ZNA1105  
**IC:** 2703N-LGHAZNA1105  
**EUT Type:** Zigbee Dongle  
**Model Name:** LGHA-ZNA1105  
**Date of Test:** May 23, 2011 ~ June 09, 2011  
**Contact person:** Name: Chang Han An  
Phone #: +82-10-4178-4525  
  
**Place of Tests:** HCT Co., Ltd.  
105-1, Jangam-ri, Majang-Myeon, Icheon-si, Kyunggi-Do, 467-811, KOREA.  
(IC Recognition No. : 5944A-3)

## 2. EUT DESCRIPTION

<b>EUT Type</b>	Zigbee Dongle
<b>Model Name</b>	LGHA-ZNA1105
<b>Power Supply</b>	DC 5.0 V
<b>Frequency Range</b>	TX: 2405 MHz ~ 2475 MHz RX: 2405 MHz ~ 2475 MHz
<b>Max. RF Output Power:</b>	18.91 dBm
<b>Modulation Type</b>	DSSS
<b>Antenna Specification</b>	Manufacturer: AMOTECH Co., LTD. Antenna type: Chip Antenna Peak Gain : 4.0 dBi

### 3. TEST METHODOLOGY

The measurement procedure described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz(ANSI C63.4-2003)

#### 3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### 3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

#### 3.3 GENERAL TEST PROCEDURES

##### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version :2003) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

##### Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version: 2003)

#### 3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) is chosen for full testing.

<b>FCC PT.15.247 TEST REPORT</b>	<b>FCC CERTIFICATION REPORT</b>			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1106FR18	Date of Issue: June 10,2011	EUT Type: Zigbee Dongle	FCC ID: BEJ-LGHA-ZNA1105	IC: 2703N-LGHAZNA1105

## 4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

## 5. FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 105-1, Jangam-ri, Majang-Myeon, Icheon-si, Kyunggi-Do, 467-811, Korea. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2003) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated March 02, 2011 (Registration Number: 90661)

### 5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

<b>FCC PT.15.247 TEST REPORT</b>	<b>FCC CERTIFICATION REPORT</b>			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
<b>Test Report No.</b> HCTR1106FR18	<b>Date of Issue:</b> June 10,2011	<b>EUT Type:</b> Zigbee Dongle	<b>FCC ID:</b> BEJ-LGHA-ZNA1105	<b>IC:</b> 2703N-LGHAZNA1105

## 6. ANTENNA REQUIREMENTS

### According to FCC 47 CFR §15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

\* The antennas of this E.U.T are permanently attached.

\*The E.U.T Complies with the requirement of §15.203

<b>FCC PT.15.247 TEST REPORT</b>	<b>FCC CERTIFICATION REPORT</b>			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
<b>Test Report No.</b> HCTR1106FR18	<b>Date of Issue:</b> June 10,2011	<b>EUT Type:</b> Zigbee Dongle	<b>FCC ID:</b> BEJ-LGHA-ZNA1105	<b>IC:</b> 2703N-LGHAZNA1105

## 7.SUMMARY OF TEST RESULTS

Test Description	IC Section(s)	FCC Rule Parts	Test Limit	Test Condition	Test Result
6dB Bandwidth	RSS-210, A8.2(a)	15.247(a)(2)	> 500 kHz	CONDUCTED	PASS
Transmitter Output Power	RSS-210, A8.4(4)	15.247(b)(3)	< 1 Watts		PASS
Transmitter Power Spectral Density	RSS-210, A8.2(b)	15.247(e)	< 8 dBm in any 3 kHz BW		PASS
Out-of-Band Emissions (Band Width at 20dB below)	RSS-210, A8.5	15.247(d)	< 20 dB for all out-of band emissions		PASS
AC Power line Conducted Emissions	RSS-GEN, Section 7.2.2	15.207(a)	cf. Section 8.6		PASS
Radiated Spurious Emissions	RSS-210, A2.9, A 8.5	15.205, 15.209	cf. Section 8.5.1	RADIATED	PASS
Radiated Restricted Band Edge	RSS-210, A2.9, A 8.5	15.205, 15.209	cf. Section 8.5.2		PASS
Receiver Spurious Emissions	RSS-GEN, Section 7.2.3	-	cf. Section 8.5.3		PASS



## 8. TEST RESULT


### 8.1 6dB BANDWIDTH MEASUREMENT

#### Test Requirements and limit, §15.247(a)(2)

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

**The minimum permissible 6dB bandwidth is 500 kHz.**

#### ■ TEST CONFIGURATION

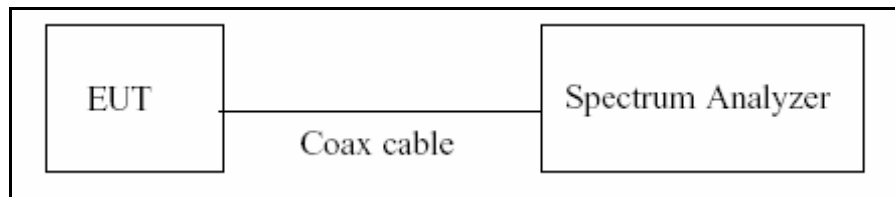

#### ■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to

RBW: 100 kHz

VBW: 100 kHz

SPAN: 10 MHz


#### ■ TEST RESULTS

Conducted 6dB Bandwidth Measurements


Frequency [MHz]	Channel No.	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
2405	11	1.628	0.500	Pass
2440	18	1.546	0.500	Pass
2475	25	1.597	0.500	Pass

■ RESULT PLOTS


6dB Bandwidth plot (CH 11)

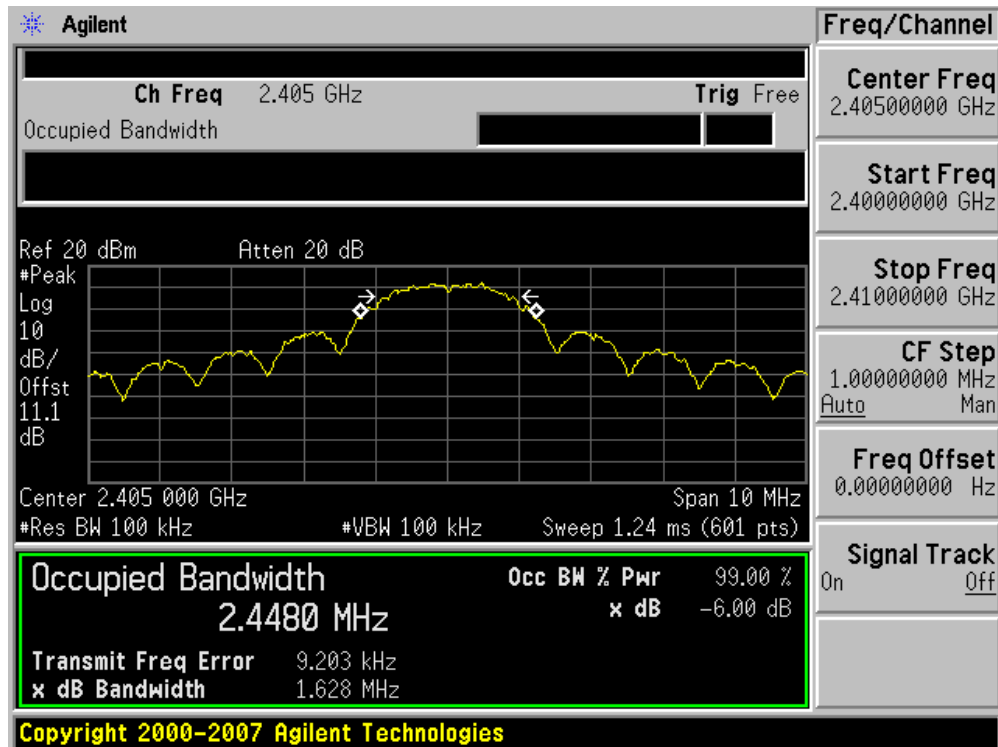

6dB Bandwidth plot (CH 18)

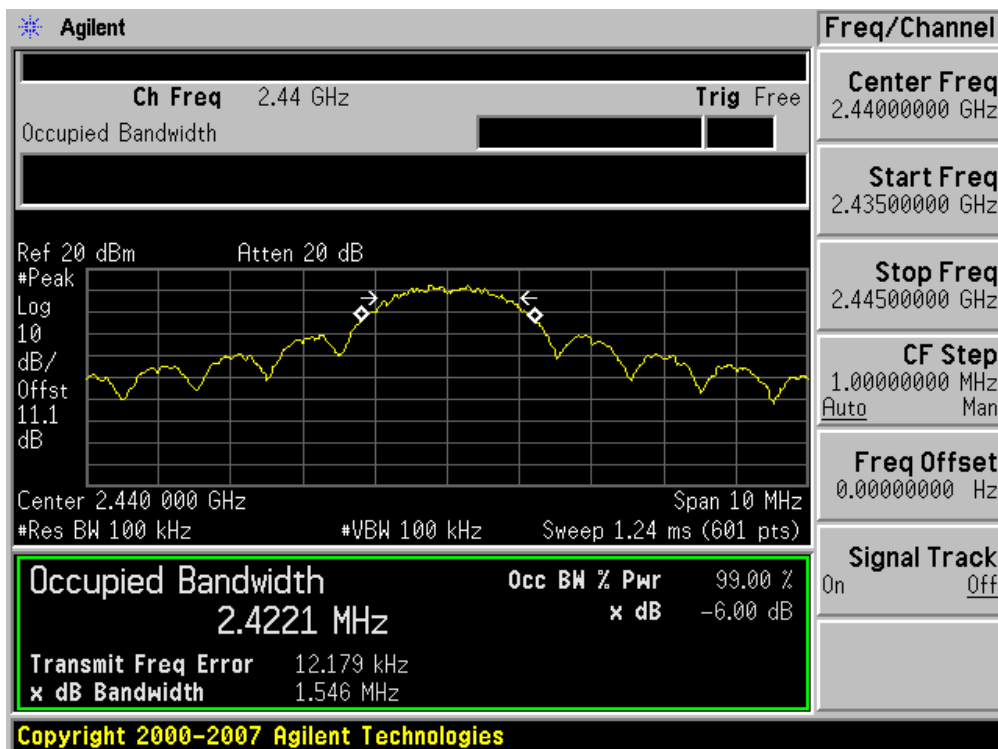

**6dB Bandwidth plot (CH 25)**

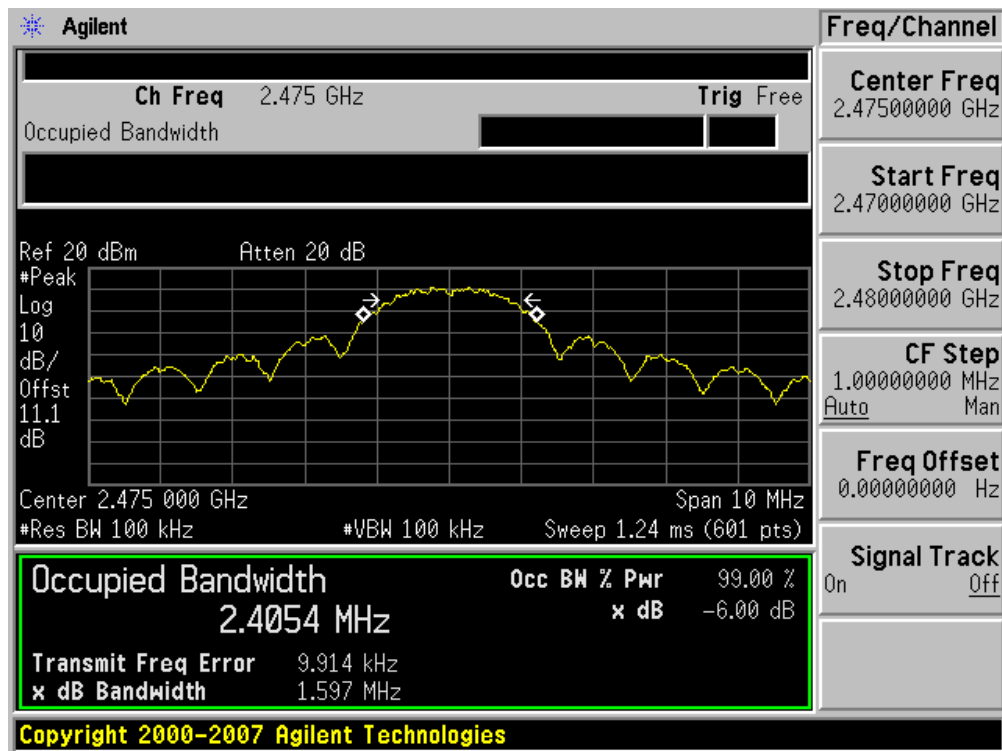

<b>FCC PT.15.247 TEST REPORT</b>	<b>FCC CERTIFICATION REPORT</b>			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
<b>Test Report No.</b> HCTR1106FR18	<b>Date of Issue:</b> June 10, 2011	<b>EUT Type:</b> Zigbee Dongle	<b>FCC ID:</b> BEJ-LGHA-ZNA1105	<b>IC:</b> 2703N-LGHAZNA1105


## 8.2 OUTPUT POWER MEASUREMENT

### Test Requirements and limit, §15.247(b)(3)

A transmitter antenna terminal of EUT is connected to the input of a Spectrum Analyzer.  
Measurement is made while the EUT is operating in transmission mode at the appropriate frequencies.

**The maximum permissible conducted output power is 1 Watt.**

#### ■ TEST CONFIGURATION

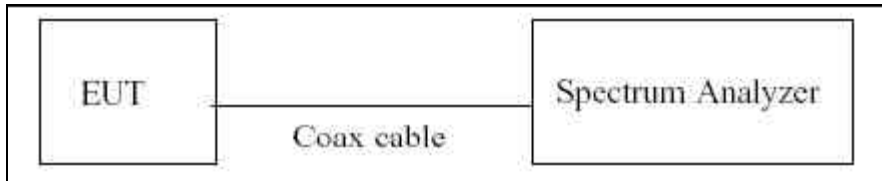

#### ■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to

RBW: 1 MHz

VBW: 1 MHz

SPAN: 10 MHz

Detector Mode = Peak

#### ■ TEST RESULTS

##### Peak-Conducted Output Power Measurements


Frequency[MHz]	Channel No.	Measured Power(dBm)	Limit (dBm)
2405	11	18.91	30
2440	18	18.47	30
2475	25	17.48	30

### Average-Conducted Output Power Measurements


Frequency[MHz]	Channel No.	Measured Power(dBm)	Limit (dBm)
2405	11	16.07	30
2440	18	15.46	30
2475	25	14.49	30

■ RESULT PLOTS-Peak


Conducted Output Power (CH 11)

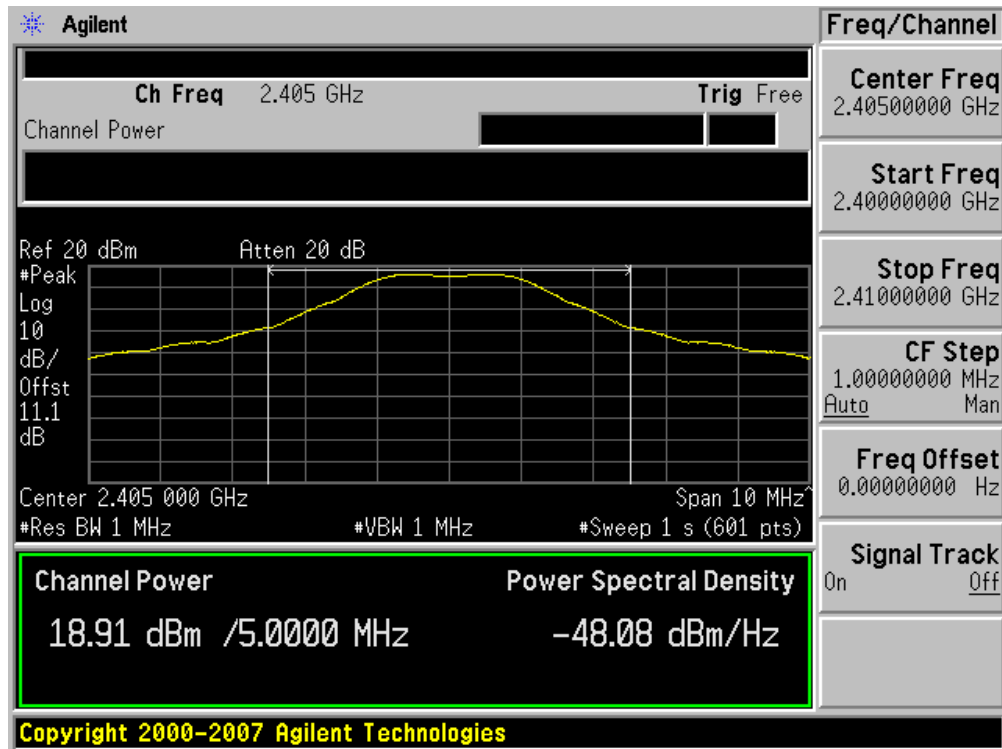

Conducted Output Power (CH 18)

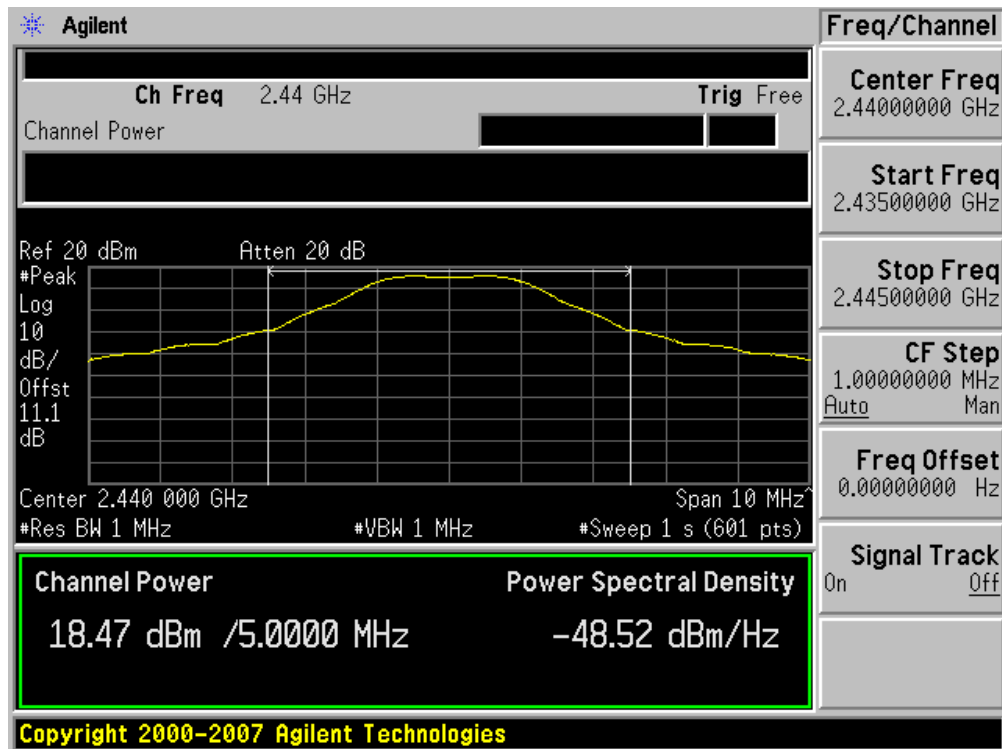


### Conducted Output Power (CH 25)

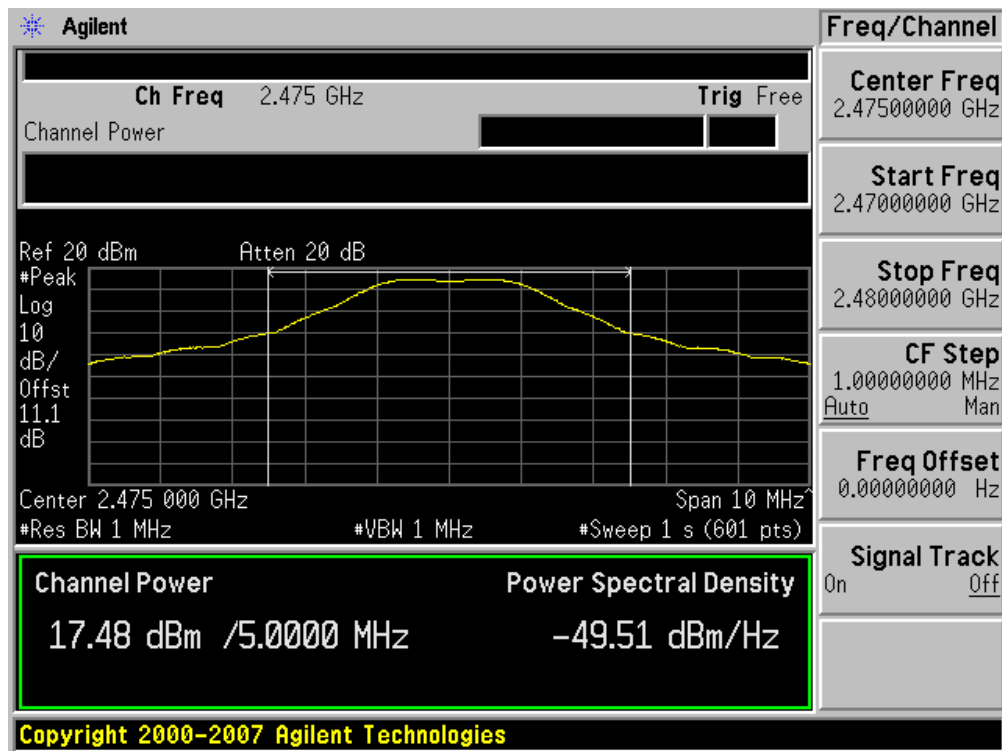


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1106FR18	Date of Issue: June 10, 2011	EUT Type: Zigbee Dongle	FCC ID: BEJ-LGHA-ZNA1105	IC: 2703N-LGHAZNA1105

■ RESULT PLOTS-Average

Conducted Output Power (CH 11)

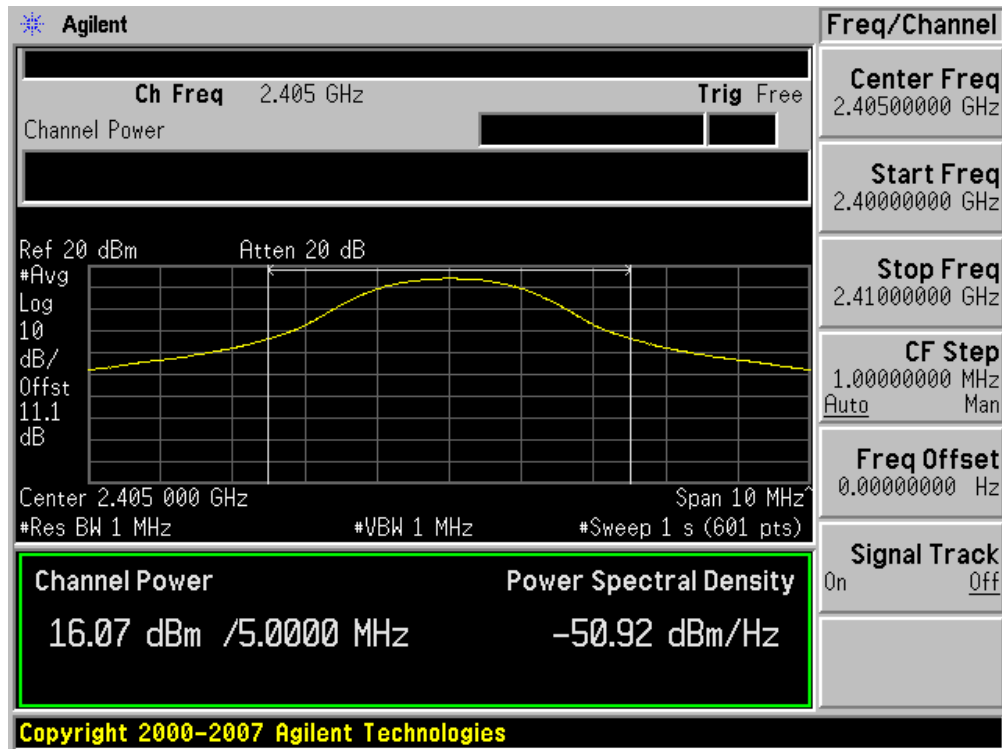


Conducted Output Power (CH 18)

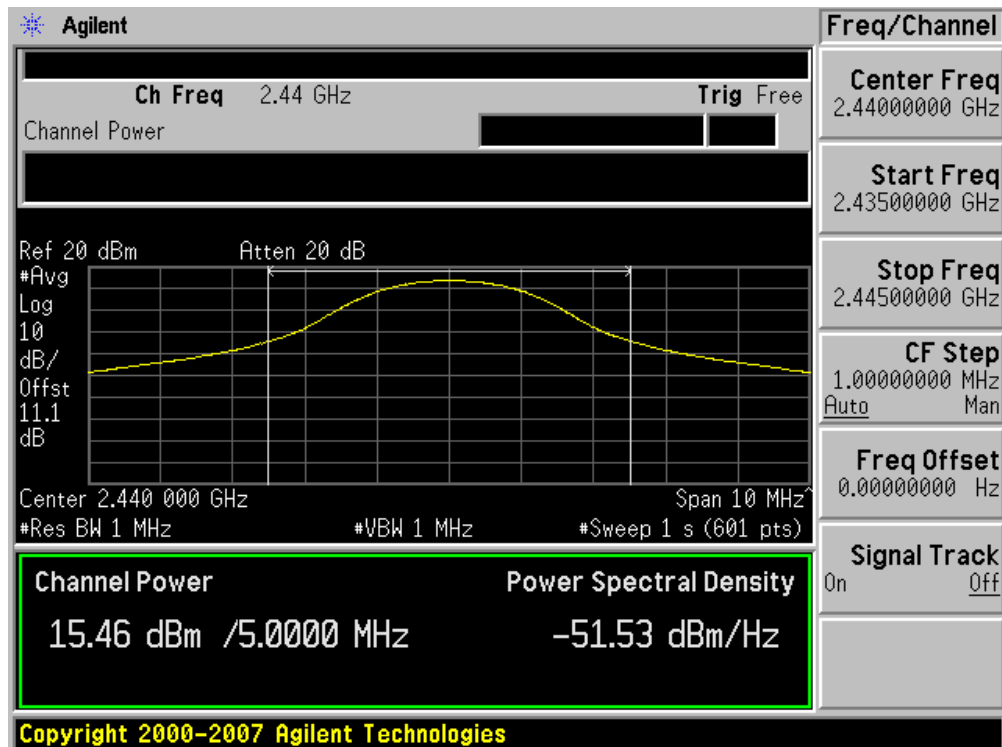



### Conducted Output Power (CH 25)

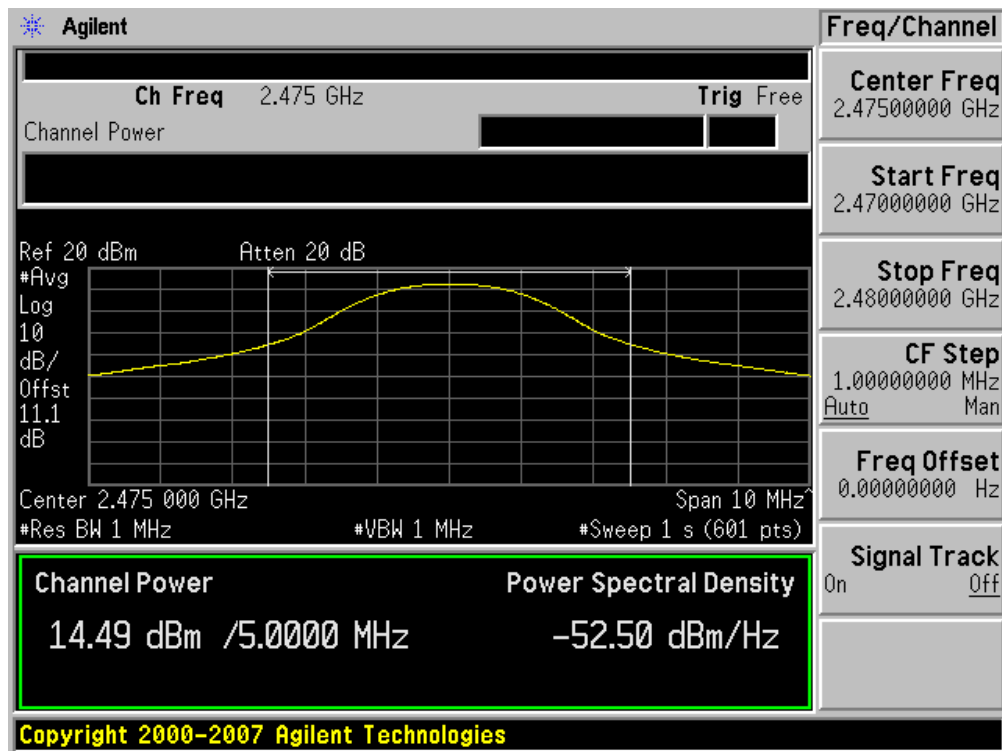

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1106FR18	Date of Issue: June 10,2011	EUT Type: Zigbee Dongle	FCC ID: BEJ-LGHA-ZNA1105	IC: 2703N-LGHAZNA1105


### 8.3 POWER SPECTRAL DENSITY

#### Test Requirements and limit, §15.247(e)

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

**Minimum Standard – The transmitter power density average over 1-second interval shall not be greater than 8dBm in any 3kHz BW.**

#### ■ TEST CONFIGURATION

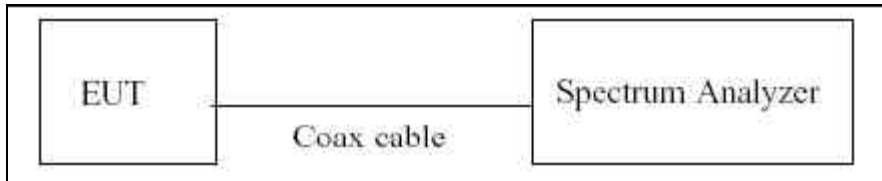

#### ■ TEST PROCEDURE

The spectrum analyzer is set to :

1. Span = 300 kHz
2. RBW = 3 kHz (7dB/div)
3. VBW = 3 kHz
4. Sweep = 100 sec
5. Detector Mode = Peak


#### ■ TEST RESULTS

**Conducted Power Density Measurements**


Frequency (MHz)	Channel No.	Test Result	
		Power Density (dBm)	Pass/Fail
2405	11	0.91	Pass
2440	18	0.26	Pass
2475	25	-1.41	Pass

■ RESULT PLOTS


Power Spectral Density (CH 11)

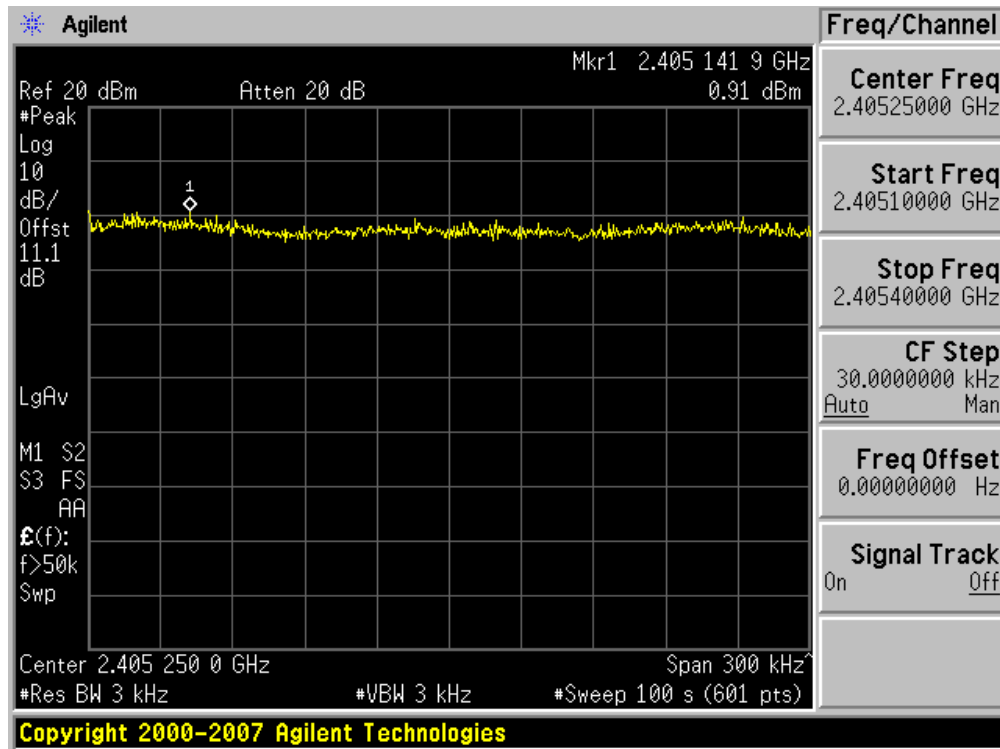

Power Spectral Density (CH 18)

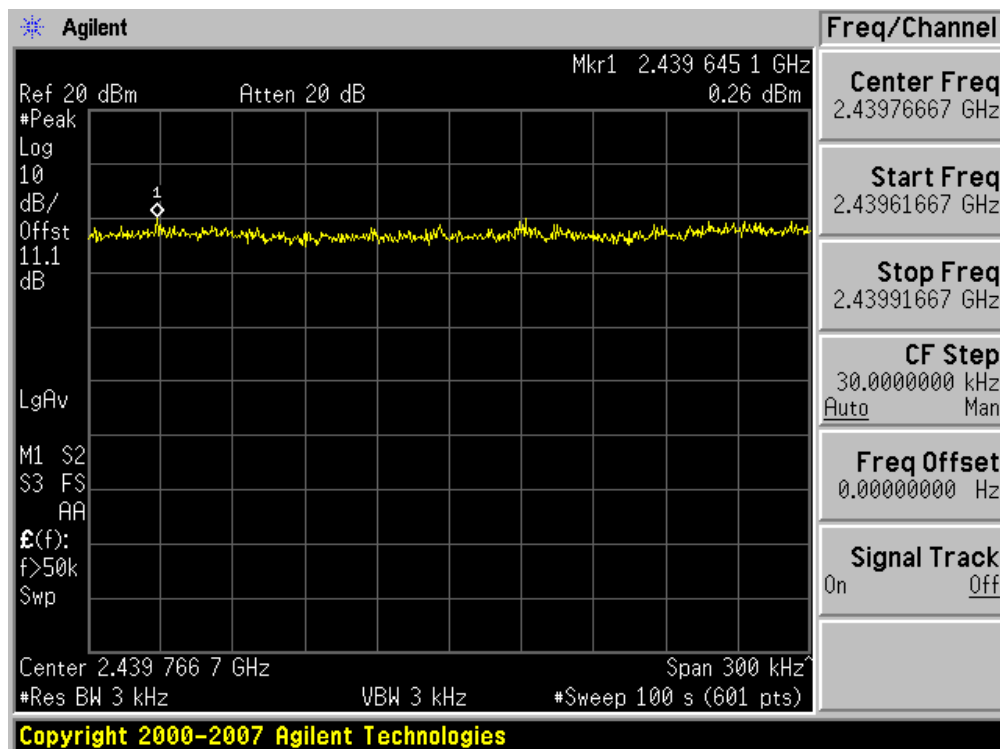

**Power Spectral Density (CH 25)**

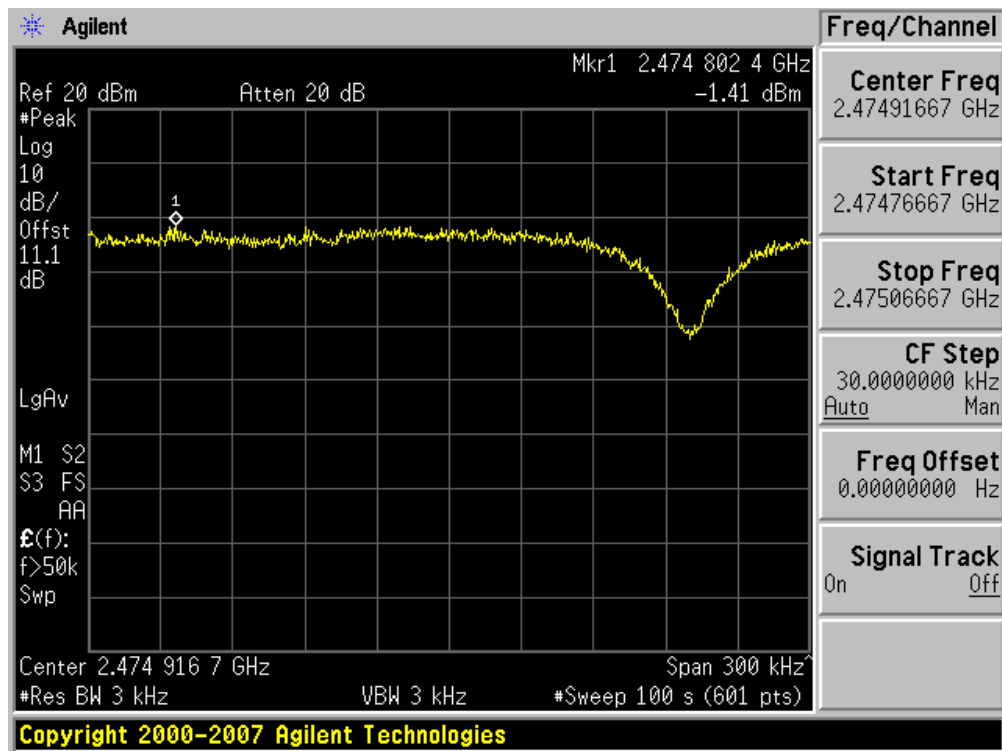


<b>FCC PT.15.247 TEST REPORT</b>	<b>FCC CERTIFICATION REPORT</b>			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1106FR18	Date of Issue: June 10,2011	EUT Type: Zigbee Dongle	FCC ID: BEJ-LGHA-ZNA1105	IC: 2703N-LGHAZNA1105

## 8.4 OUT OF BAND EMISSIONS AT THE BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS

### Test Requirements and limit, §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### ■ TEST CONFIGURATION

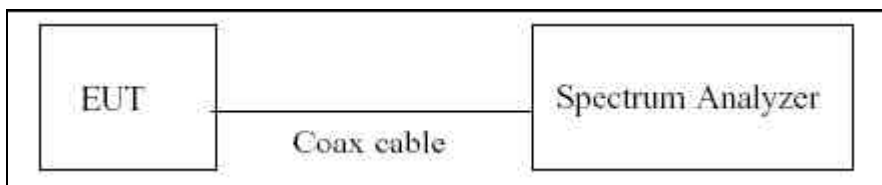

### ■ TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


Detector Mode is set to a peak detector Mode.

Measurements are made over the 30 MHz to 26 GHz range with the transmitter set to the lowest, middle, and highest channels.


<b>FCC PT.15.247 TEST REPORT</b>	<b>FCC CERTIFICATION REPORT</b>			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1106FR18	Date of Issue: June 10,2011	EUT Type: Zigbee Dongle	FCC ID: BEJ-LGHA-ZNA1105	IC: 2703N-LGHAZNA1105

■ RESULT PLOTS


BandEdge (CH 11)

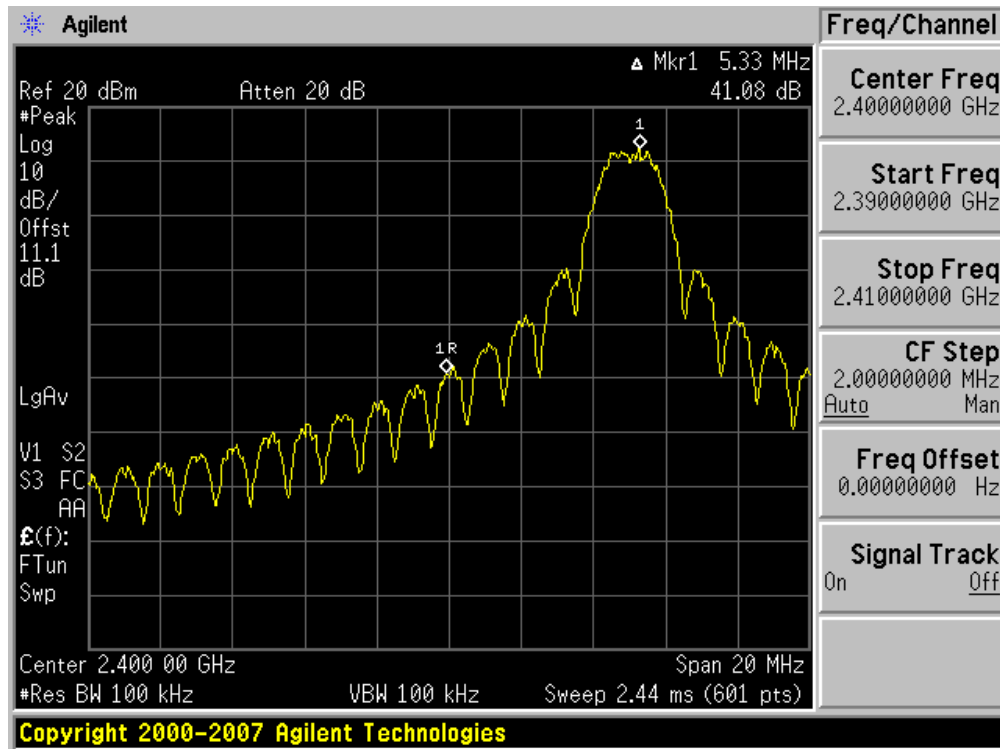


BandEdge (CH 25)

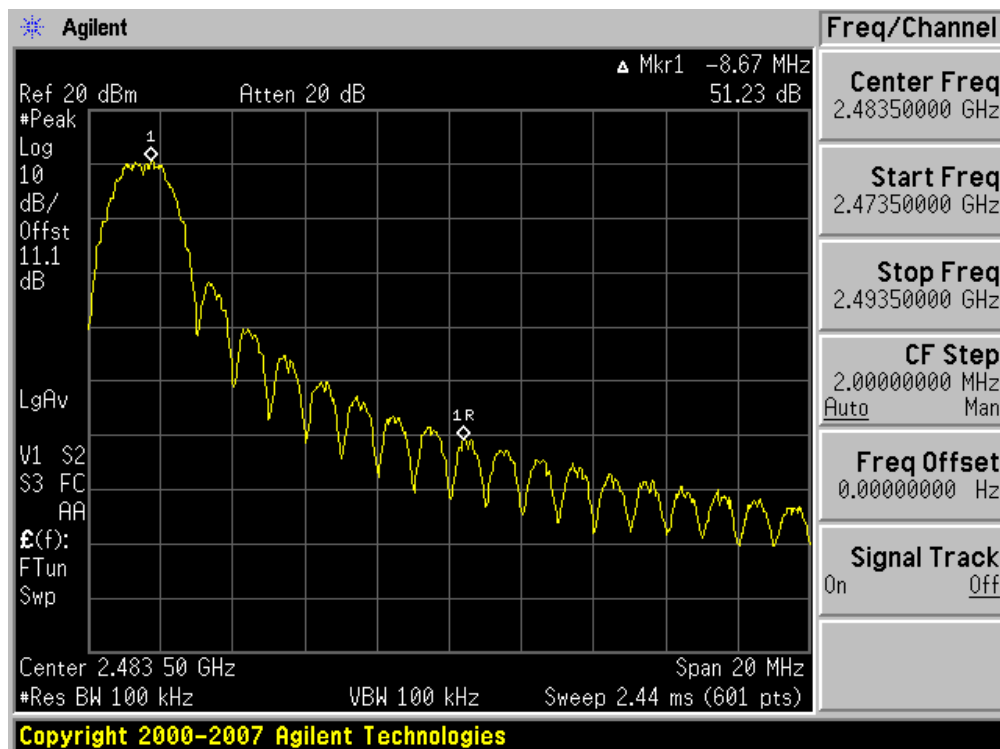


### Conducted Spurious Emission (CH 11)

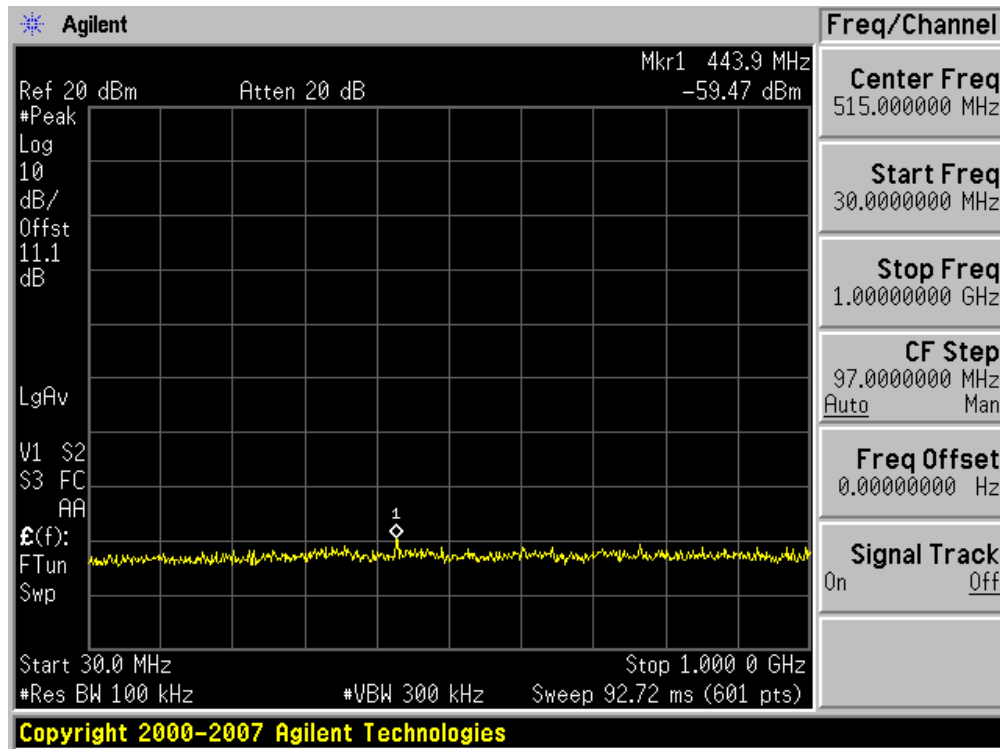

### Conducted Spurious Emission (CH 18)

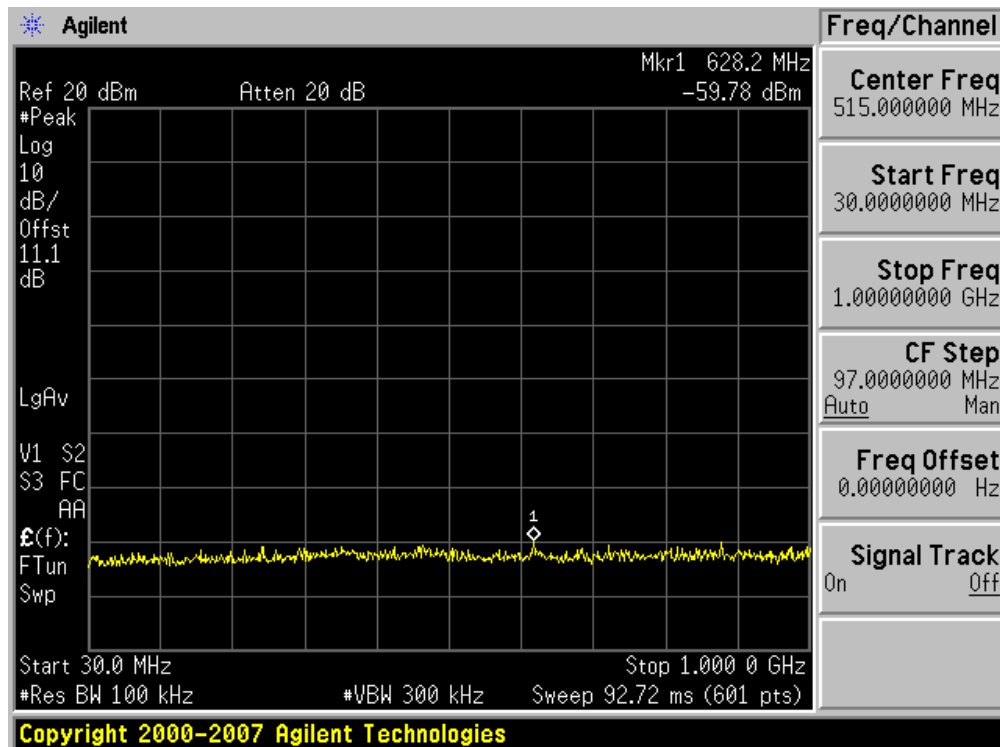

## Conducted Spurious Emission (CH 25)

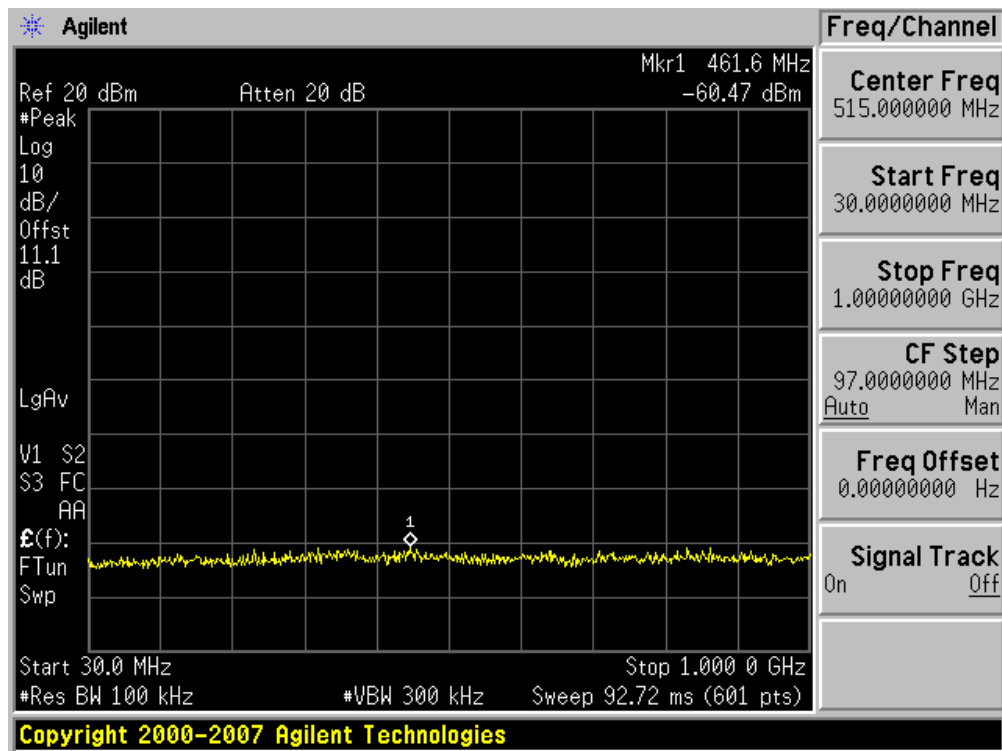


<b>FCC PT.15.247 TEST REPORT</b>	<b>FCC CERTIFICATION REPORT</b>			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1106FR18	Date of Issue: June 10,2011	EUT Type: Zigbee Dongle	FCC ID: BEJ-LGHA-ZNA1105	IC: 2703N-LGHAZNA1105




1 GHz ~ 26 GHz


### Conducted Spurious Emission (CH 11)

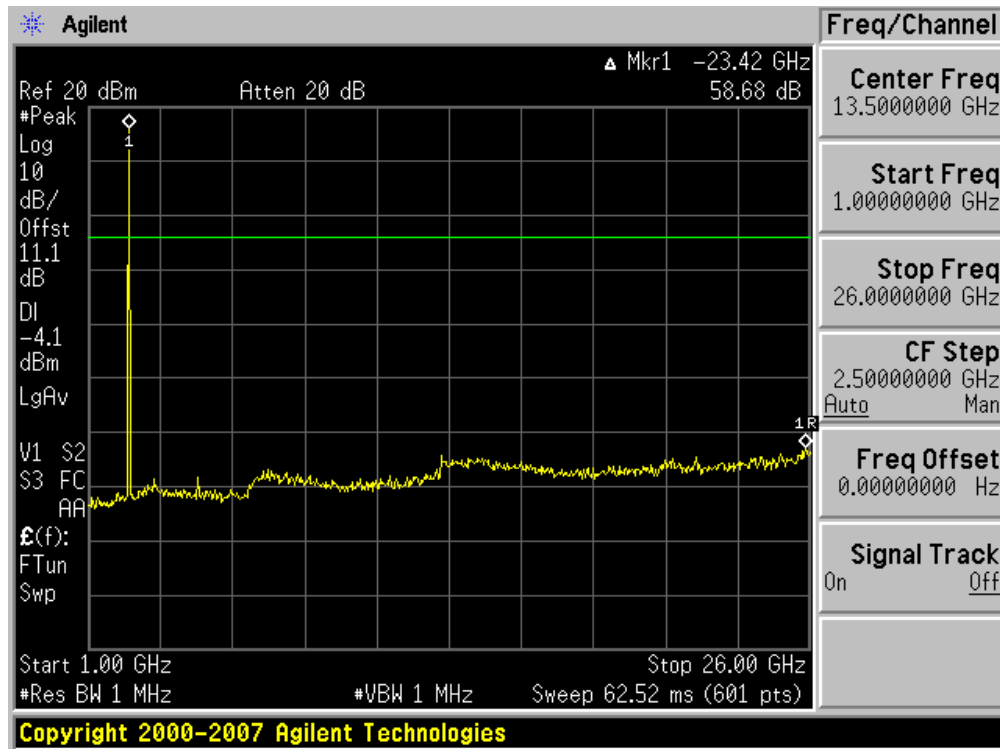

### Conducted Spurious Emission (CH 18)

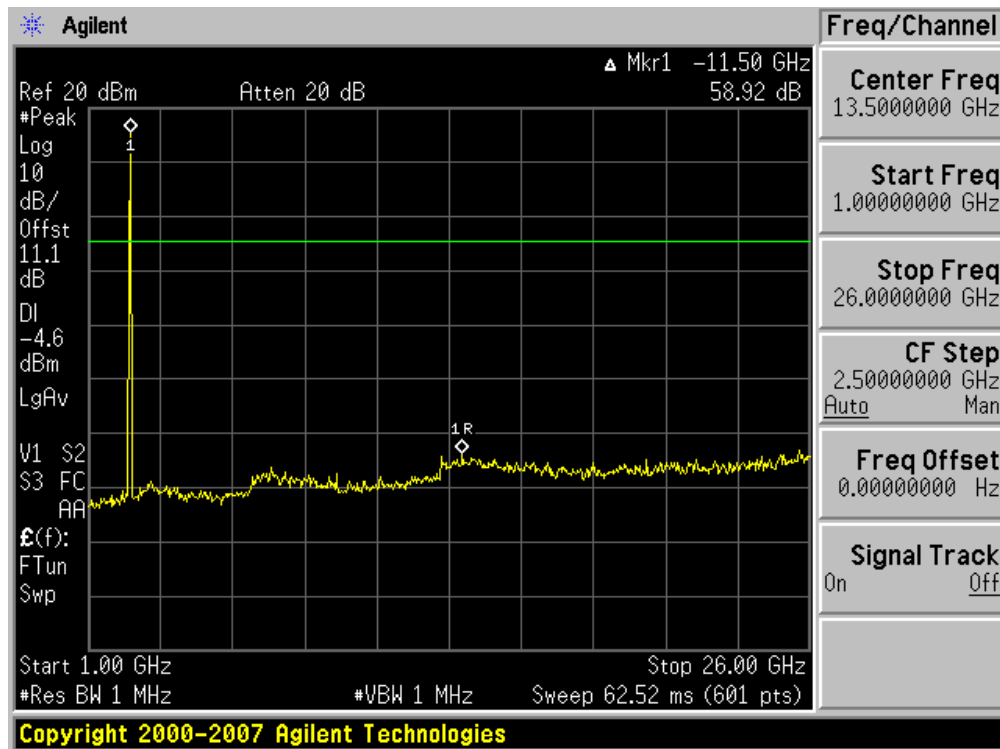

### Conducted Spurious Emission (CH 25)

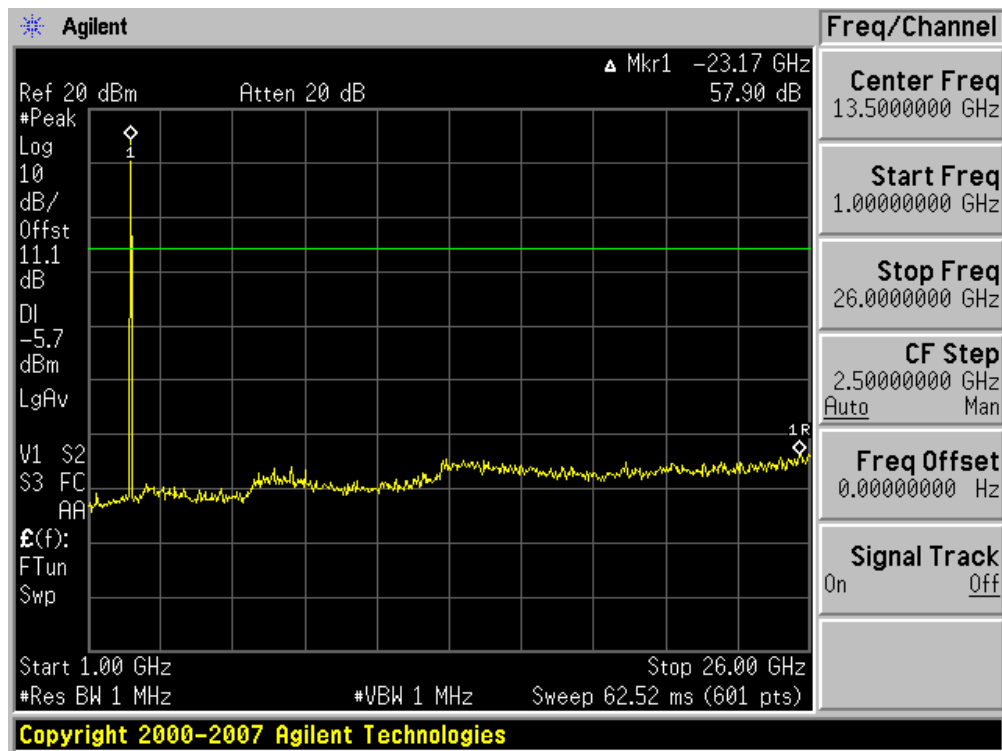

<b>FCC PT.15.247 TEST REPORT</b>	<b>FCC CERTIFICATION REPORT</b>			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1106FR18	Date of Issue: June 10,2011	EUT Type: Zigbee Dongle	FCC ID: BEJ-LGHA-ZNA1105	IC: 2703N-LGHAZNA1105

## 8.5 RADIATED MEASUREMENT.


### 8.5.1 RADIATED SPURIOUS EMISSIONS.

Test Requirements and limit, §15.205, §15.209


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

## Test Configuration

### Below 30 MHz

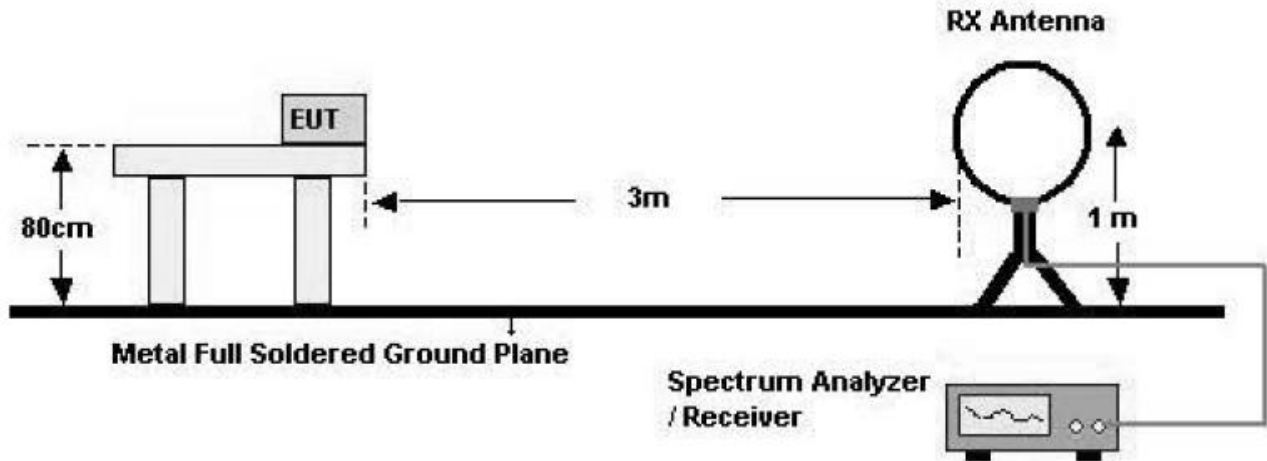


### 30 MHz - 1 GHz

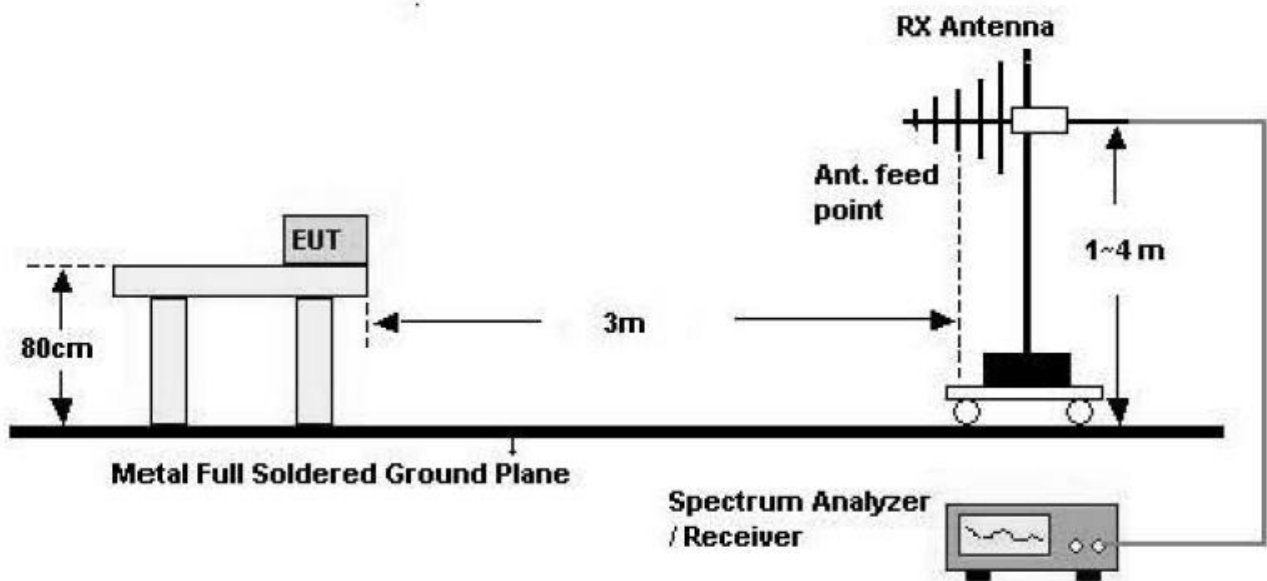

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1106FR18	Date of Issue: June 10,2011	EUT Type: Zigbee Dongle	FCC ID: BEJ-LGHA-ZNA1105	IC: 2703N-LGHAZNA1105

## Above 1 GHz

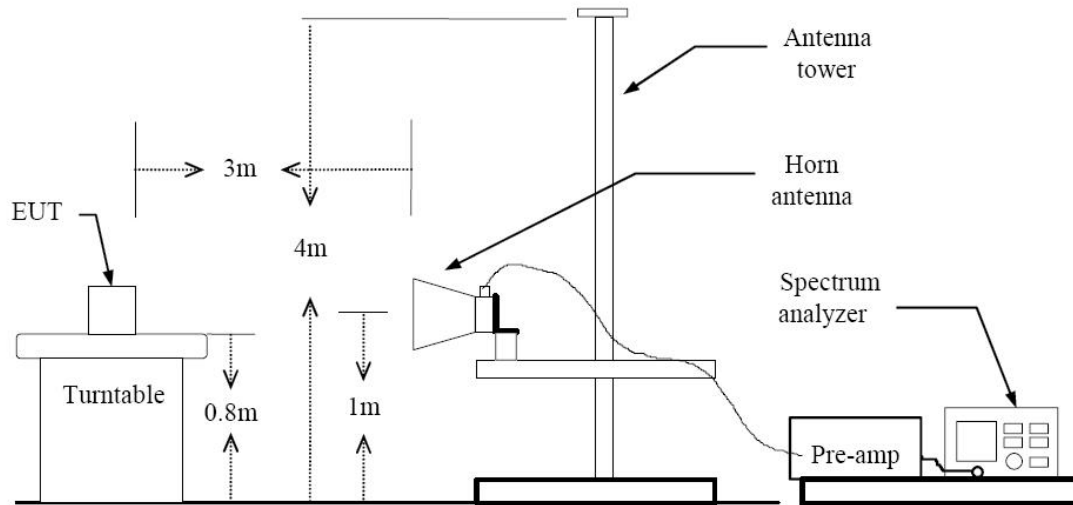

## TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8 m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1106FR18	Date of Issue: June 10,2011	EUT Type: Zigbee Dongle	FCC ID: BEJ-LGHA-ZNA1105	IC: 2703N-LGHAZNA1105

## TEST RESULTS

**9 kHz – 30MHz**

**Operation Mode:** Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB $\mu$ V	dB /m	dB	(H/V)	dB $\mu$ V/m	dB $\mu$ V/m	dB
No Critical peaks found							

### Notes:

1. Measuring frequencies from 9 kHz to the 30MHz.
2. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
3. Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB)
4. Limit line = specific Limits (dB $\mu$ V) + Distance extrapolation factor

## TEST RESULTS

**Below 1 GHz**

**Operation Mode:** Normal Mode

Frequency MHz	Reading dBuV	Ant. Factor dB/m	Cable Loss dB	ANT POL (H/V)	Total dBuV/m	Limit dBuV/m	Margin dB
260.0	18.2	12.1	1.8	H	32.0	46	14.0
300.0	18.3	13.4	1.9	H	33.6	46	12.4
362.2	20.4	14.7	2.1	H	37.2	46	8.8
843.5	7.2	22.7	3.3	H	33.2	46	12.8
896.7	7.9	23.3	3.4	V	34.6	46	11.4
901.0	6.0	23.3	3.5	H	32.8	46	13.2

### Notes:

1. Measuring frequencies from 30 MHz to the 1 GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

## Above 1 GHz

Operating Frequency 2405  
Channel No. 11 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4810	63.07	-3.82	V	59.25	74	14.75	PK
4810	53.11	-3.82	V	49.29	54	4.71	AV
7215	57.38	5.16	V	62.54	74	11.46	PK
7215	45.79	5.16	V	50.95	54	3.05	AV
9620	54.94	8.50	V	63.44	74	10.56	PK
9620	43.01	8.50	V	51.51	54	2.49	AV
4810	61.38	-3.82	H	57.56	74	16.44	PK
4810	51.50	-3.82	H	47.68	54	6.32	AV
7215	57.13	5.16	H	62.29	74	11.71	PK
7215	44.97	5.16	H	50.13	54	3.87	AV
9620	54.90	8.50	H	63.40	74	10.60	PK
9620	43.31	8.50	H	51.81	54	2.19	AV

### Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
  - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 10 Hz.



Operating Frequency 2440  
Channel No. 18 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4880	63.70	-3.68	V	60.02	74	13.98	PK
4880	54.49	-3.68	V	50.81	54	3.19	AV
7320	56.09	5.74	V	61.83	74	12.17	PK
7320	44.52	5.74	V	50.26	54	3.74	AV
9760	56.14	8.54	V	64.68	74	9.32	PK
9760	44.16	8.54	V	52.70	54	1.30	AV
4880	60.51	-3.68	H	56.83	74	17.17	PK
4880	50.05	-3.68	H	46.37	54	7.63	AV
7320	56.76	5.74	H	62.50	74	11.50	PK
7320	45.08	5.74	H	50.82	54	3.18	AV
9760	56.73	8.54	H	65.27	74	8.73	PK
9760	45.00	8.54	H	53.54	54	0.46	AV

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
  - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 10 Hz.

Operating Frequency 2475  
Channel No. 25 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4950	61.52	-3.57	V	57.95	74	16.05	PK
4950	51.97	-3.57	V	48.40	54	5.60	AV
7425	54.08	6.05	V	60.13	74	13.87	PK
7425	40.82	6.05	V	46.87	54	7.13	AV
9900	54.83	8.99	V	63.82	74	10.18	PK
9900	42.56	8.99	V	51.55	54	2.45	AV
4950	59.01	-3.57	H	55.44	74	18.56	PK
4950	47.7	-3.57	H	44.13	54	9.87	AV
7425	55.44	6.05	H	61.49	74	12.51	PK
7425	43.02	6.05	H	49.07	54	4.93	AV
9900	55.54	8.99	H	64.53	74	9.47	PK
9900	43.31	8.99	H	52.30	54	1.70	AV

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MH.
  - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 10 Hz.

## 8.5.2 RADIATED RESTRICTED BAND EDGE MEASUREMENTS

### Test Requirements and limit, §15.247(d) §15.205, §15.209

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a) (See section 15.205(c)).

Operating Frequency	2405 MHz, 2475 MHz
Channel No.	11 Ch, 25 Ch

Frequency [MHz]	Reading dBuV	AN.+CL [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
2390.0	24.29	33.25	H	57.54	74	16.46	PK
2390.0	12.12	33.25	H	45.37	54	8.63	AV
2390.0	23.20	33.25	V	56.45	74	17.55	PK
2390.0	10.62	33.25	V	43.87	54	10.13	AV
2483.5	28.91	33.73	H	62.64	74	11.36	PK
2483.5	17.12	33.73	H	50.85	54	3.15	AV
2483.5	25.99	33.73	V	59.72	74	14.28	PK
2483.5	13.59	33.73	V	47.32	54	6.68	AV

### Notes:

1. Spectrum setting:
  - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
  - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 10 Hz.

### 8.5.3 RECEIVER SPURIOUS EMISSIONS

IC Rule(s)	RSS-Gen Section 7.2.3(see Table Below)
Test Requirements:	Emission Level shall not exceed RSS-Gen Section 7.2.3.2 limits
Operating conditions:	Under normal test conditions
Method of testing:	Radiated
S/A. Settings:	F < 1 GHz: RBW: 120 kHz, VBW: 300 kHz (Quasi Peak)
	F > 1 GHz: RBW: 1 MHz, VBW: 1 MHz (Peak)
Mode of operation:	Receive

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
30 – 88	100 (40 dBuV)	3
88 - 216	150 (43.5 dBuV))	3
216 – 960	200 (46 dBuV)	3
Above 960	500 (54 dBuV)	3

Operation Mode: Receiver

30 MHz ~ 1 GHz

Frequency MHz	Reading dBuV	Ant. Factor dB/m	Cable Loss dB	ANT POL (H/V)	Total dBuV/m	Limit dBuV/m	Margin dB
260.0	18.2	12.1	1.8	H	32.0	46	14.0
300.0	18.3	13.4	1.9	H	33.6	46	12.4
362.2	20.4	14.7	2.1	H	37.2	46	8.8
843.5	7.2	22.7	3.3	H	33.2	46	12.8

Above 1 GHz

Frequency MHz	Reading dBuV	Ant. Factor dB/m	Cable Loss dB	ANT POL (H/V)	Total dBuV/m	Limit dBuV/m	Margin dB
No Critical peaks found							

## 8.6 POWERLINE CONDUCTED EMISSIONS

### Test Requirements and limit, §15.207

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference groundplane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.

■ RESULT PLOTS

Conducted Emissions (Line 1)


HCT

RF

EUT: LGHA-ZNA1105  
Manufacturer: LG  
Operating Condition: ZIGBEE MODE  
Test Site: SHIELD ROOM  
Operator: JS-LEE  
Test Specification: H  
Comment: H

SCAN TABLE: "FCC PART 15 B(H)"

Short Description:				FCC PART 15	CLASS B		
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer	
Frequency	Frequency	Width					
150.0 kHz	500.0 kHz	1.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				

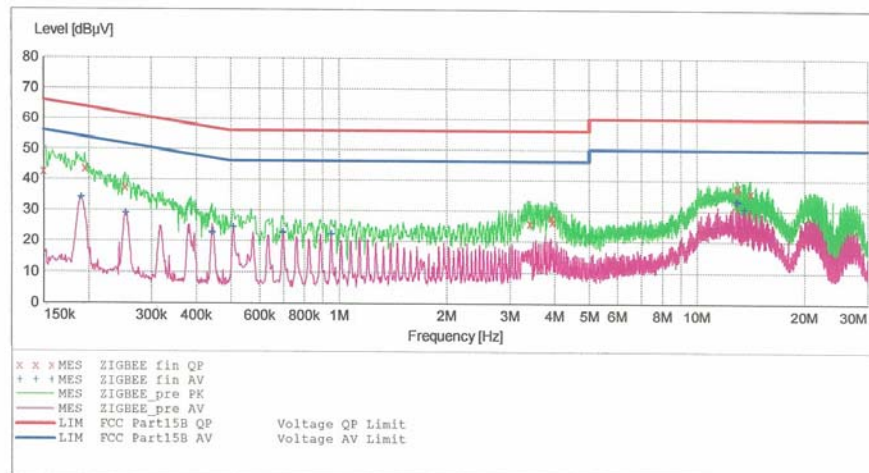

MEASUREMENT RESULT: "ZIGBEE\_fin QP"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBμV	dB	dBμV	dB		
0.150010	42.70	10.1	66	23.3	---	---
0.195010	43.70	10.1	64	20.1	---	---
0.253010	37.50	10.1	62	24.1	---	---
3.412000	26.00	10.3	56	30.0	---	---
3.920000	28.00	10.4	56	28.0	---	---
3.948000	26.50	10.4	56	29.5	---	---
12.908000	37.20	11.2	60	22.8	---	---
13.008000	37.70	11.2	60	22.3	---	---
14.128000	35.90	11.3	60	24.1	---	---

**MEASUREMENT RESULT: "ZIGBEE\_fin AV"**

6/9/2011 5:14PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.191010	34.00	10.1	54	20.0	---	---
0.254010	28.90	10.1	52	22.7	---	---
0.443010	22.60	10.1	47	24.4	---	---
0.508000	24.40	10.1	46	21.6	---	---
0.696000	22.70	10.1	46	23.3	---	---
0.952000	22.30	10.1	46	23.7	---	---
12.908000	33.10	11.2	50	16.9	---	---
13.012000	32.90	11.2	50	17.1	---	---
13.616000	30.60	11.3	50	19.4	---	---

## Conducted Emissions (Line 2)


**HCT**

**RF**

EUT: LGHA-ZNA1105  
Manufacturer: LG  
Operating Condition: ZIGBEE MODE  
Test Site: SHIELD ROOM  
Operator: JS-LEE  
Test Specification: N  
Comment: H

### SCAN TABLE: "FCC PART 15 B(N)"

Short Description:		FCC PART 15 CLASS B					
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer	
Frequency	Frequency	Width					
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				

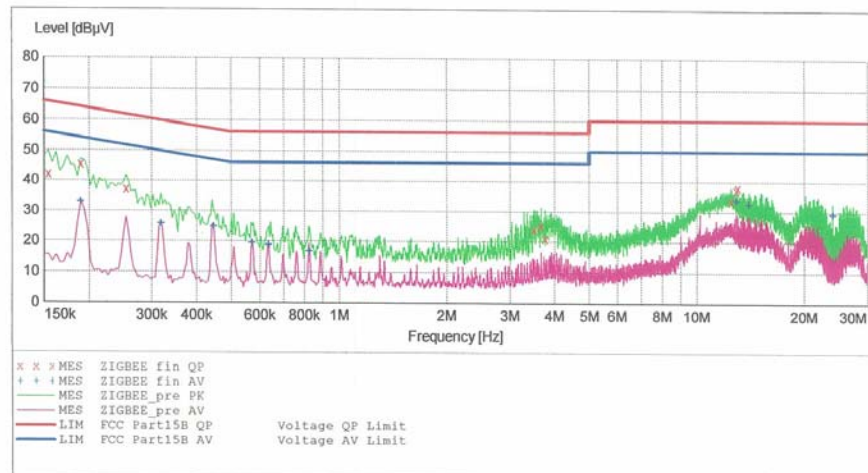

### MEASUREMENT RESULT: "ZIGBEE\_fin QP"

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.154010	42.00	10.3	66	23.8	---	---
0.190010	45.40	10.3	64	18.7	---	---
0.254010	37.20	10.3	62	24.4	---	---
3.512000	24.00	10.6	56	32.0	---	---
3.672000	25.20	10.6	56	30.8	---	---
3.772000	21.20	10.6	56	34.8	---	---
12.508000	33.80	11.2	60	26.2	---	---
12.908000	37.30	11.2	60	22.7	---	---
13.008000	38.20	11.2	60	21.8	---	---



**MEASUREMENT RESULT: "ZIGBEE\_fin AV"**

6/9/2011 5:10PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.190010	32.70	10.3	54	21.3	---	---
0.318010	25.80	10.3	50	23.9	---	---
0.446010	24.70	10.3	47	22.3	---	---
0.572000	19.40	10.3	46	26.6	---	---
0.636000	18.80	10.3	46	27.2	---	---
0.824000	16.80	10.4	46	29.2	---	---
12.908000	33.70	11.2	50	16.3	---	---
14.020000	32.50	11.3	50	17.5	---	---
24.000000	29.20	11.8	50	20.8	---	---

<b>FCC PT.15.247 TEST REPORT</b>	<b>FCC CERTIFICATION REPORT</b>			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
<b>Test Report No.</b> HCTR1106FR18	<b>Date of Issue:</b> June 10,2011	<b>EUT Type:</b> Zigbee Dongle	<b>FCC ID:</b> BEJ-LGHA-ZNA1105	<b>IC:</b> 2703N-LGHAZNA1105

## 9. LIST OF TEST EQUIPMENT

Manufacturer	Model / Equipment	Calibration Interval	Calibration Due	Serial No.
Rohde & Schwarz	ESH2-Z5/ LISN	Annual	02/01/2012	861741/013
Schwarzbeck	VULB 9168/ TRILOG Antenna	Biennial	02/09/2013	9168-200
HD	MA240/ Antenna Position Tower	N/A	N/A	556
EMCO	1050/ Turn Table	N/A	N/A	114
HD GmbH	HD 100/ Controller	N/A	N/A	13
HD GmbH	KMS 560/ SlideBar	N/A	N/A	12
Rohde & Schwarz	ESH3-Z2/ PULSE LIMITER	Annual	10/25/2011	375.8810.352
Rohde & Schwarz	SCU-18/ Signal Conditioning Unit	Annual	09/29/2011	10094
Schwarzbeck	BBHA 9120D/ Horn Antenna	Biennial	09/23/2011	296
Rohde & Schwarz	FSP30 / Spectrum Analyzer	Annual	03/23/2012	839117/011
Agilent	E4440A / Spectrum Analyzer	Annual	05/02/2012	US45303008
Agilent	E4416A /Power Meter	Annual	01/04/2012	GB41291412
Agilent	E9327A /POWER SENSOR	Annual	05/02/2012	MY4442009
Wainwright Instrument	WHF3.3/18G-10EF / High Pass Filter	Annual	05/02/2012	1
Wainwright Instrument	WRCJ2400/2483.5-2370/2520-60/14SS / Band Reject Filter	Annual	05/02/2012	1
Hewlett Packard	11636B/Power Divider	Annual	12/29/2011	11377
Hewlett Packard	11667B / Power Splitter	Annual	11/08/2011	10126
DIGITAL	EP-3010 /DC POWER SUPPLY	Annual	01/04/2012	3110117
ITECH	IT6720 / DC POWER SUPPLY	Annual	12/01/2011	010002156287001199
TESCOM	TC-3000A / BLUETOOTH TESTER	Annual	01/10/2012	3000A490112
Rohde & Schwarz	CBT / BLUETOOTH TESTER	Annual	05/02/2012	100422
EMCO	6502.LOOP ANTENNA	Biennial	01/13/2012	9009-2536