

FCC UNII REPORT

FCC Certification

Applicant Name:
LG Electronics USA**Address:**
1000 Sylvan Avenue Englewood Cliffs, NJ
07632 United States**Date of Issue:**

September 14, 2017

Test Site/Location:

HCT CO., LTD., 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Report No.: HCT-R-1708-F006**HCT FRN:** 0005866421**FCC ID : BEJID7SB****APPLICANT : LG Electronics USA****Model:** ID7SB**EUT Type:** Silverbox RADIO ASM-RECEIVER**Modulation type** OFDM**FCC Classification:** Unlicensed National Information Infrastructure(UNII)**FCC Rule Part(s):** Part 15.407

Band	Mode	Frequency Range (MHz)	Power (dBm)	Power (W)
UNII1	802.11a	5180 – 5240	12.65	0.01840
	802.11n_HT20	5180 – 5240	12.64	0.01835
	802.11n_HT40	5190 - 5230	8.60	0.00724
	802.11ac_VHT20	5180 – 5240	12.46	0.01763
	802.11ac_VHT40	5190 - 5230	8.43	0.00697
	802.11ac_VHT80	5210	7.48	0.00560
UNII3	802.11a	5745 – 5825	12.60	0.01822
	802.11n_HT20	5745 – 5825	12.61	0.01822
	802.11n_HT40	5755 – 5795	8.45	0.00700
	802.11ac_VHT20	5745 – 5825	12.47	0.01766
	802.11ac_VHT40	5755 – 5795	8.53	0.00713
	802.11ac_VHT80	5775	6.95	0.00495

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)

**Report prepared by : Kyung Soo Kang**
Engineer of Telecommunication testing center**Approved by : Jong Seok Lee**
Manager of Telecommunication testing center

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-R-1708-F006	September 14, 2017	- First Approval Report

Table of Contents

1. GENERAL INFORMATION	4
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
3.1 EUT CONFIGURATION	5
3.2 EUT EXERCISE	5
3.3 GENERAL TEST PROCEDURES	5
3.4 DESCRIPTION OF TEST MODES	5
4. INSTRUMENT CALIBRATION.....	6
5. FACILITIES AND ACCREDITATIONS	6
5.1 FACILITIES	6
5.2 EQUIPMENT	6
6. ANTENNA REQUIREMENTS	6
7. MEASUREMENT UNCERTAINTY	7
8. SUMMARY OF TEST RESULTS	8
9. TEST RESULT	9
9.1 DUTY CYCLE.....	9
9.2 EMISSION BANDWIDTH AND MINIMUM EMISSION BANDWIDTH MEASUREMENT	12
9.3 OUTPUT POWER MEASUREMENT	24
9.4 POWER SPECTRAL DENSITY	40
9.5 FREQUENCY STABILITY	48
9.6 RADIATED MEASUREMENT.....	54
9.6.1 RADIATED SPURIOUS EMISSIONS.....	54
9.6.2 RADIATED RESTRICTED BAND EDGE MEASUREMENTS	91
9.7 POWERLINE CONDUCTED EMISSIONS	104
10. LIST OF TEST EQUIPMENT	105
10.1 LIST OF TEST EQUIPMENT(Conducted Test)	105
10.2 LIST OF TEST EQUIPMENT(Radiated Test).....	106

1. GENERAL INFORMATION

Applicant: LG Electronics USA
Address: 1000 Sylvan Avenue Englewood Cliffs, NJ 07632 United States
FCC ID: BEJID7SB
EUT Type: Silverbox RADIO ASM-RECEIVER
Model: ID7SB
Date(s) of Tests: July 24, 2017 ~ September 14, 2017
Place of Tests: HCT Co., Ltd.
74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea

2. EUT DESCRIPTION

Model	ID7SB	
EUT Type	Silverbox RADIO ASM-RECEIVER	
Power Supply	DC 12 V	
Frequency Range	TX_20 MHz BW:	5180 MHz - 5240 MHz (UNII 1)/ 5745 MHz - 5825 MHz (UNII 3)
	40 MHz BW:	5190 MHz - 5230 MHz (UNII 1)/ 5755 MHz - 5795 MHz (UNII 3)
	80 MHz BW:	5210 MHz(UNII 1)/ 5775 MHz (UNII 3)
	RX_20 MHz BW:	5180 MHz - 5240 MHz (UNII 1)/ 5745 MHz - 5825 MHz (UNII 3)
	40 MHz BW:	5190 MHz - 5230 MHz (UNII 1)/ 5755 MHz - 5795 MHz (UNII 3)
	80 MHz BW:	5210 MHz(UNII 1)/ 5775 MHz (UNII 3)
Modulation Type	OFDM(802.11a, 802.11n, 802.11ac)	
Antenna Specification	Manufacturer: Amotech CO.LTD Antenna type: Dielectric Chip Antenna Peak Gain : 4.7 dBi (UNII 1) / 3.2 dBi(UNII 3)	

3. TEST METHODOLOGY

The measurement procedure described in FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04 dated May 2, 2017 entitled “Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part15, Subpart E” and ANSI C63.10 (Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’ were used in the measurement. For 802.11ac, KDB644545 D03 v01 dated August 14, 2014.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.407 under the FCC Rules Part 15 Subpart E.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3.75 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 8 of ANSI C63.10. (Version: 2013)

Conducted Antenna Terminal

See Section from 8.1 to 8.4.(KDB 789033 D02 v01r04)

3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) is chosen for full testing.

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2006).

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated July 07, 2015 (Registration Number: 90661)

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203, §15.407

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

* The antennas of this E.U.T are permanently attached.

* The E.U.T Complies with the requirement of §15.203, §15.407

7. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70

8. SUMMARY OF TEST RESULTS


Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
26dB Bandwidth	§15.407 (for Power Measurement)	N/A	CONDUCTED	PASS
6 dB Bandwidth	§15.407(e)	>500 kHz (5725-5850 MHz)		PASS
Maximum Conducted Output Power	§15.407(a)(1)	< 250 mW (5150-5250 MHz) < 250 mW or 11+10 log log ₁₀ (BW) dBm (5250-5350 MHz) < 250 mW or 11+10 log log ₁₀ (BW) dBm (5470-5725 MHz) <1 W (5725-5850 MHz)		PASS
Peak Power Spectral Density	§15.407(a)(1),(5)	<11 dBm/ MHz (5150-5250 MHz) <11 dBm/ MHz (5250-5350 MHz) <11 dBm/ MHz (5470-5725 MHz) <30 dBm/500 kHz(5725-5850 MHz)		PASS
Frequency Stability	§15.407(g)	NA		PASS
AC Conducted Emissions 150 kHz-30 MHz	15.207	<FCC 15.207 limits		PASS
Undesirable Emissions	§15.407(b)	<-27 dBm/MHz EIRP (UNII1, 2A, 2C) <-27 dBm/MHz EIRP(Worst) (UNII 3)	RADIATED	PASS
General Field Strength Limits(Restricted Bands and Radiated Emission Limits)	15.205, 15.407(b)(5), (6)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		PASS

9. TEST RESULT

9.1 DUTY CYCLE

The zero-span mode on a spectrum analyzer or EMI receiver, if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set $RBW \geq EBW$ if possible; otherwise, set RBW to the largest available value. Set $VBW \geq RBW$. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$, where T is defined in section B)1)a), and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

■ TEST CONFIGURATION

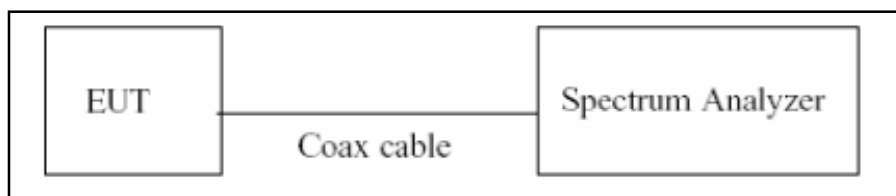

■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer. We tested according to the zero-span measurement method, (B.2 in KDB 789033 D02 v01r04)

The largest available value of RBW is 8 MHz and VBW is 50 MHz. The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.

1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on} / T_{total} and Duty Cycle Factor = $10 \cdot \log(1/\text{Duty Cycle})$

■ Duty Cycle Factor

Mode	Data Rate (Mbps)	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11a	6	2.063	2.180	0.94632215	0.240
	9	1.385	1.491	0.92884408	0.321
	12	1.043	1.161	0.89876830	0.464
	18	0.704	0.810	0.86956522	0.607
	24	0.532	0.639	0.83256837	0.796
	36	0.364	0.479	0.75991649	1.192
	48	0.276	0.391	0.70588235	1.513
	54	0.248	0.355	0.69892567	1.556
Mode	MCS INDEX	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11n_HT20	0	1.924	2.041	0.94267516	0.256
	1	0.981	1.087	0.90283401	0.444
	2	0.667	0.774	0.86174199	0.646
	3	0.509	0.615	0.82816220	0.819
	4	0.352	0.458	0.76748599	1.149
	5	0.272	0.379	0.71853522	1.436
	6	0.248	0.363	0.68257911	1.658
	7	0.228	0.335	0.68129923	1.667
802.11n_HT40	0	0.947	1.054	0.89878258	0.463
	1	0.493	0.599	0.82242991	0.849
	2	0.341	0.446	0.76359964	1.171
	3	0.264	0.370	0.71464556	1.459
	4	0.188	0.295	0.63958553	1.941
	5	0.152	0.258	0.58669676	2.316
	6	0.140	0.246	0.56857805	2.452
	7	0.128	0.234	0.54624570	2.626


Mode	MCS INDEX	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11ac_VHT20	0	1.935	2.042	0.94789090	0.232
	1	0.988	1.085	0.91047650	0.407
	2	0.672	0.769	0.87431694	0.583
	3	0.517	0.613	0.84246575	0.744
	4	0.356	0.454	0.78395062	1.057
	5	0.280	0.378	0.74074074	1.303
	6	0.252	0.350	0.72000000	1.427
	7	0.232	0.329	0.70450583	1.521
	8	0.200	0.298	0.67131665	1.731
802.11ac_VHT40	0	0.953	1.058	0.90039315	0.456
	1	0.497	0.602	0.82558140	0.832
	2	0.344	0.442	0.77898551	1.085
	3	0.268	0.374	0.71581197	1.452
	4	0.193	0.290	0.66491267	1.772
	5	0.157	0.254	0.61723437	2.095
	6	0.144	0.241	0.59704651	2.240
	7	0.132	0.229	0.57649722	2.392
	8	0.116	0.214	0.54285473	2.653
	9	0.112	0.209	0.53398193	2.725
802.11ac_VHT80	0	0.465	0.561	0.82828342	0.818
	1	0.252	0.349	0.72313424	1.408
	2	0.184	0.290	0.63457268	1.975
	3	0.148	0.246	0.60073260	2.213
	4	0.112	0.209	0.53473886	2.719
	5	0.096	0.202	0.47524752	3.231
	6	0.088	0.185	0.47374120	3.245
	7	0.084	0.181	0.46408840	3.334
	8	0.077	0.174	0.44041451	3.561
	9	0.072	0.169	0.42679312	3.698

9.2 EMISSION BANDWIDTH AND MINIMUM EMISSION BANDWIDTH MEASUREMENT

The bandwidth at 26 dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum power control level, as defined in KDB 789033 D02 v01r04, at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26 dB bandwidth.

The 26 dB bandwidth is used to determine the conducted power limits.

■ TEST CONFIGURATION

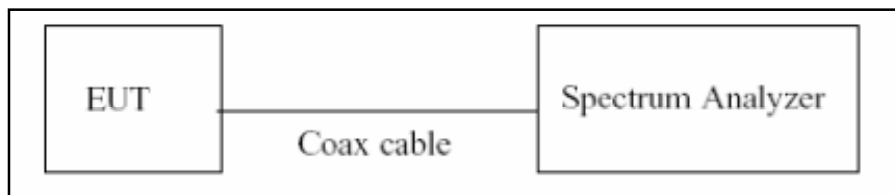

■ TEST PROCEDURE (26dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (C.1 in KDB 789033 D02 v01r04)

1. RBW = approximately 1 % of the emission bandwidth
2. VBW > RBW
3. Detector = Peak
4. Trace mode = max hold
5. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1 %.

Note : We tested 26 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 26 dB.

In order to simplify the report, attached plots were only the most wide channel.

■ TEST PROCEDURE (for the band 5.725-5.85 GHz, 6 dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to(C.2 in KDB 789033 D02 v01r04)

1. RBW = 100 kHz
2. VBW \geq 3*RBW
3. Detector = Peak
4. Trace mode = max hold
5. Allow the trace to stabilize
6. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points(upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note : We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.

TEST RESULTS for 802.11a

Conducted 26 dB Bandwidth Measurements for 802.11a


802.11a Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5180	36	20.70	N/A	Pass
5200	40	19.87	N/A	Pass
5240	48	20.74	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11a


802.11a Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	20.17	N/A	Pass
5785	157	21.21	N/A	Pass
5825	165	23.81	N/A	Pass

TEST Plot for 802.11a

802.11a UNII 1 BAND 26dB Bandwidth (CH 48)

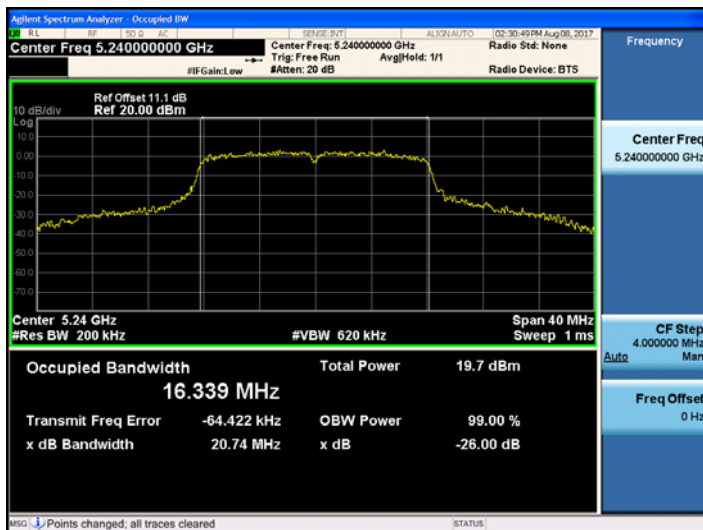

802.11a UNII 3 BAND 26dB Bandwidth (CH 165)

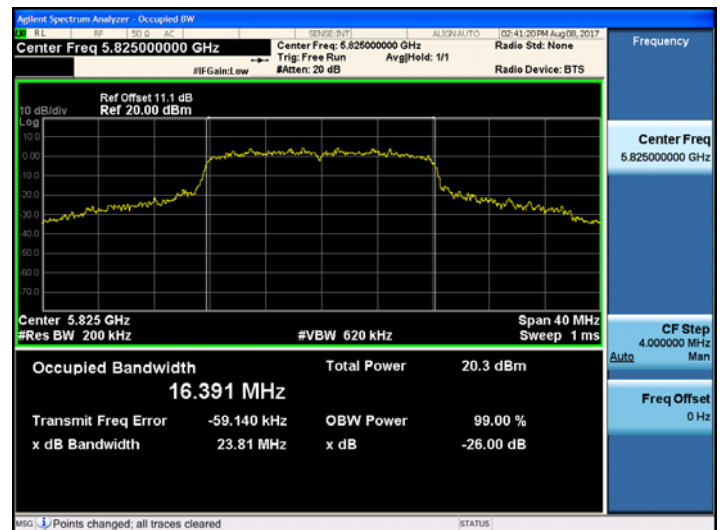

Note : In order to simplify the report, attached plots were only the most wide channel.

TEST RESULTS for 802.11n_HT20

Conducted 26 dB Bandwidth Measurements for 802.11n_HT20


802.11n_HT20 Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5180	36	21.47	N/A	Pass
5200	40	19.95	N/A	Pass
5240	48	20.49	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11n_HT20


802.11n_HT20 Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	20.55	N/A	Pass
5785	157	20.68	N/A	Pass
5825	165	23.16	N/A	Pass

TEST Plot for 802.11n_HT20

802.11n_HT20 UNII 1 BAND 26dB Bandwidth(CH 36)

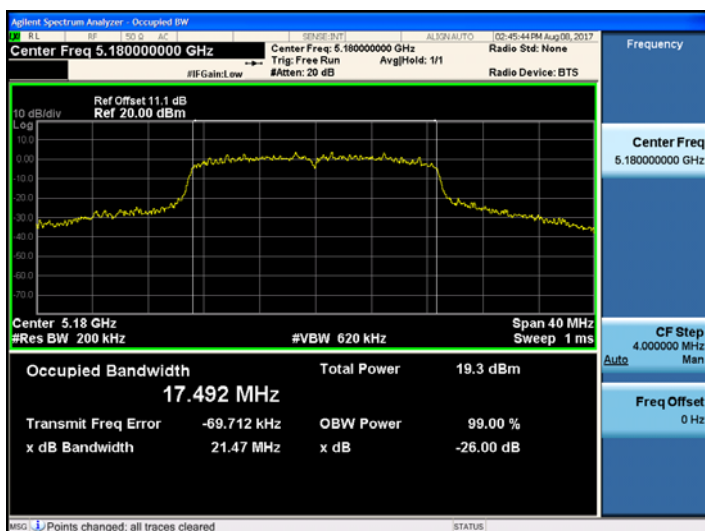

802.11n_HT20 UNII 3 BAND 26dB Bandwidth(CH 165)

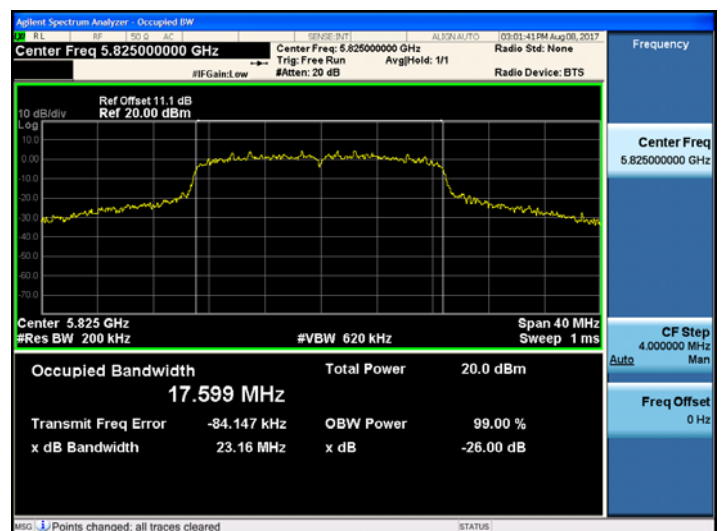

Note : In order to simplify the report, attached plots were only the most wide channel.

TEST RESULTS for 802.11ac_VHT20

Conducted 26 dB Bandwidth Measurements for 802.11ac_VHT20


802.11ac_VHT20 Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5180	36	21.03	N/A	Pass
5200	40	20.14	N/A	Pass
5240	48	19.65	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11ac_VHT20


802.11ac_VHT20 Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	20.08	N/A	Pass
5785	157	20.49	N/A	Pass
5825	165	21.62	N/A	Pass

TEST Plot for 802.11ac_VHT20

802.11ac_VHT20 UNII 1 BAND 26dB Bandwidth(CH 36)

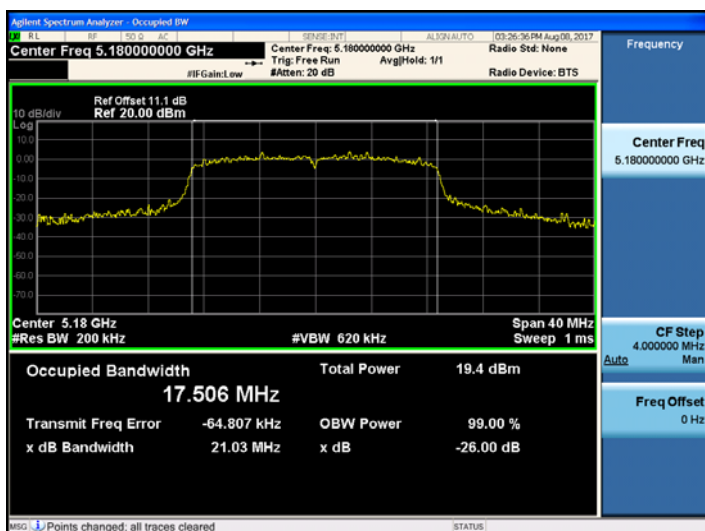

802.11ac_VHT20 UNII 3 BAND 26dB Bandwidth(CH 165)

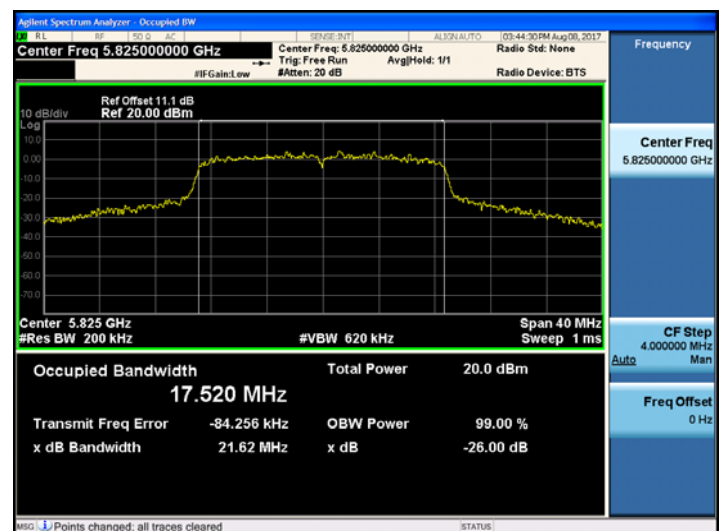

Note : In order to simplify the report, attached plots were only the most wide channel.

TEST RESULTS for 802.11n_HT40

Conducted 26 dB Bandwidth Measurements for 802.11n_HT40


802.11n_HT40 Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5190	38	41.91	N/A	Pass
5230	46	40.45	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11n_HT40


802.11n_HT40 Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5755	151	40.07	N/A	Pass
5795	159	39.80	N/A	Pass

TEST Plot for 802.11n_HT40

802.11n_HT40 UNII 1 BAND 26dB Bandwidth(CH 38)

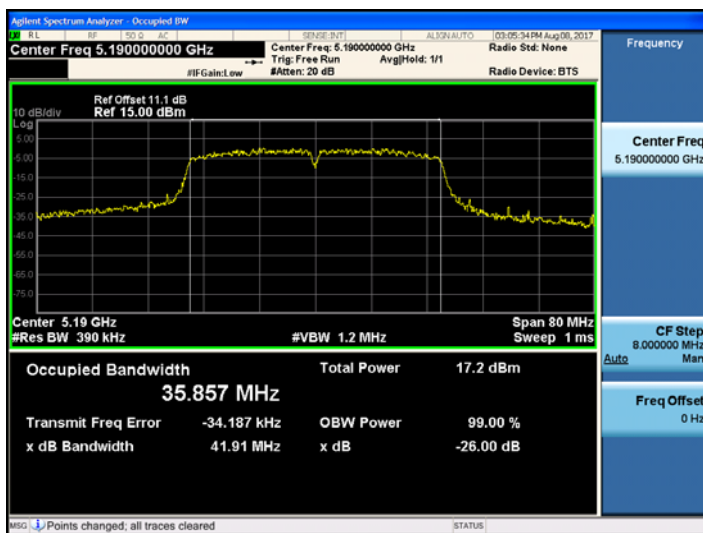

802.11n_HT40 UNII 3 BAND 26dB Bandwidth (CH 151)

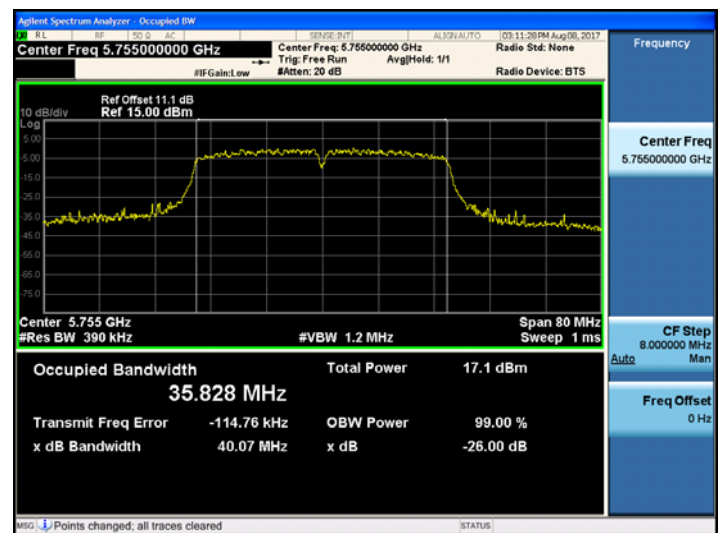

Note : In order to simplify the report, attached plots were only the most wide channel.

TEST RESULTS for 802.11ac_VHT40

Conducted 26 dB Bandwidth Measurements for 802.11ac_VHT40


802.11ac_VHT40 Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5190	38	40.90	N/A	Pass
5230	46	41.31	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11ac_VHT40


802.11ac_VHT40 Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5755	151	39.87	N/A	Pass
5795	159	40.40	N/A	Pass

TEST Plot for 802.11ac_VHT40

802.11ac_VHT40 UNII 1 BAND 26dB Bandwidth(CH 46)

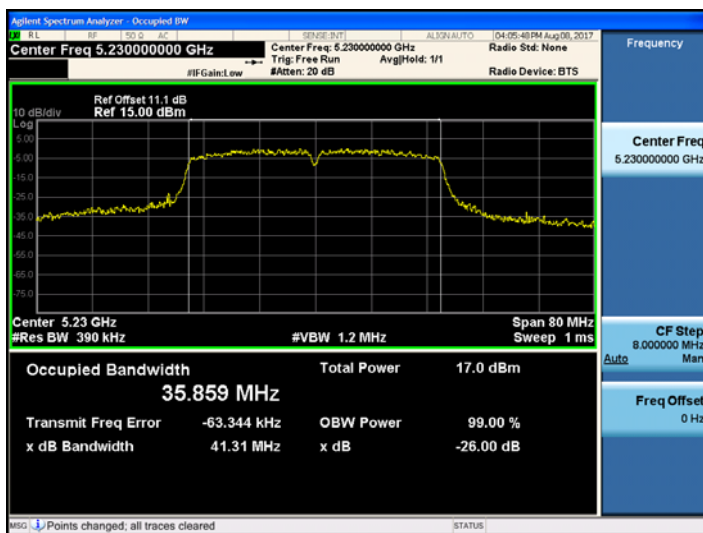

802.11ac_VHT40 UNII 3 BAND 26dB Bandwidth (CH 159)

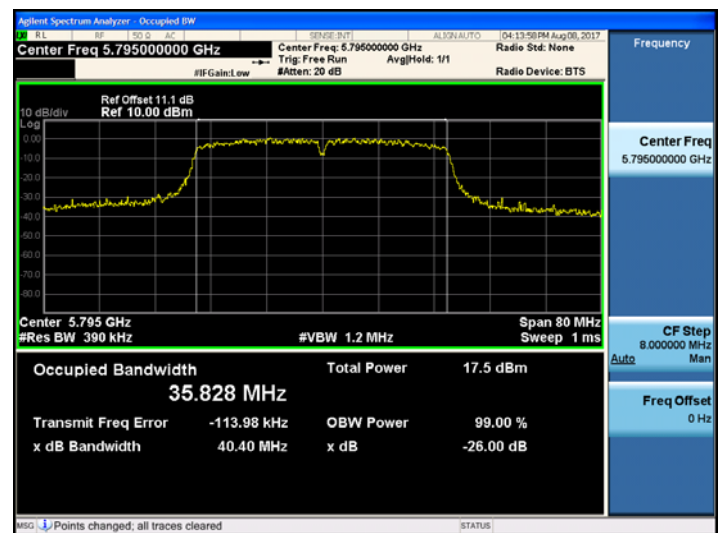

Note : In order to simplify the report, attached plots were only the most wide channel.

TEST RESULTS for 802.11ac_VHT80

Conducted 26 dB Bandwidth Measurements for 802.11ac_VHT80


802.11ac_VHT80 Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5210	42	82.83	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11ac_VHT80


802.11ac_VHT80 Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5775	155	82.30	N/A	Pass

TEST Plot for 802.11ac_VHT80

802.11ac_VHT80 UNII 1 BAND 26dB Bandwidth(CH 42)

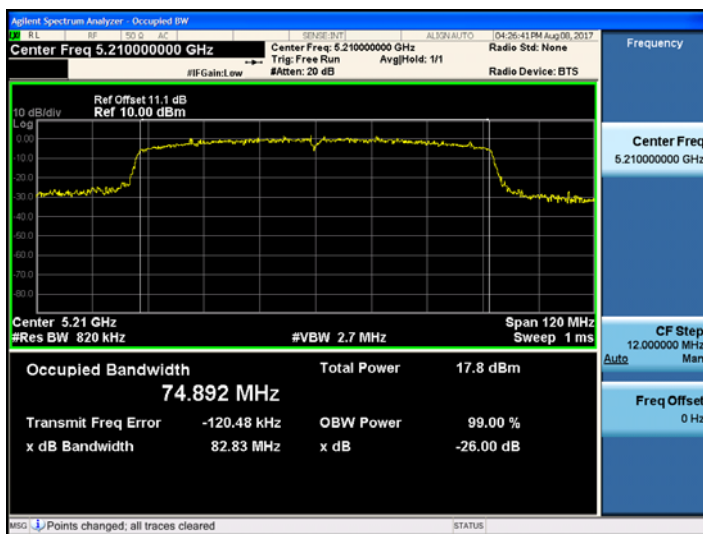

802.11ac_VHT80 UNII 3 BAND 26dB Bandwidth(CH 155)

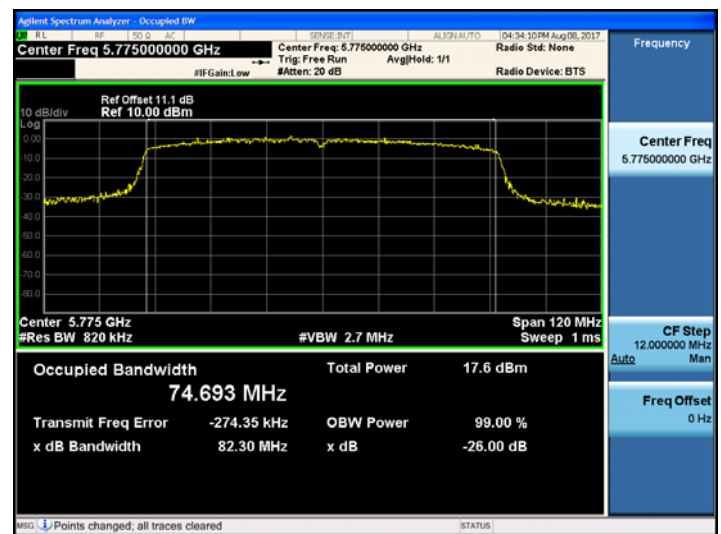

Note : In order to simplify the report, attached plots were only the most wide channel.

TEST RESULTS for 802.11a/n_HT20/ac_VHT20

Conducted 6 dB Bandwidth Measurements for 802.11a

802.11a Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	15.15	0.5	Pass
5785	157	14.59	0.5	Pass
5825	165	15.18	0.5	Pass

Conducted 6 dB Bandwidth Measurements for 802.11n_HT20


802.11n_HT20 Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	15.08	0.5	Pass
5785	157	14.14	0.5	Pass
5825	165	15.12	0.5	Pass

Conducted 6 dB Bandwidth Measurements for 802.11ac_VHT20


802.11ac_VHT20 Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	15.09	0.5	Pass
5785	157	15.15	0.5	Pass
5825	165	15.10	0.5	Pass

■ TEST Plot for 802.11a/n_HT20/ac_VHT20


802.11a UNII 3 BAND 6dB Bandwidth (CH.165)

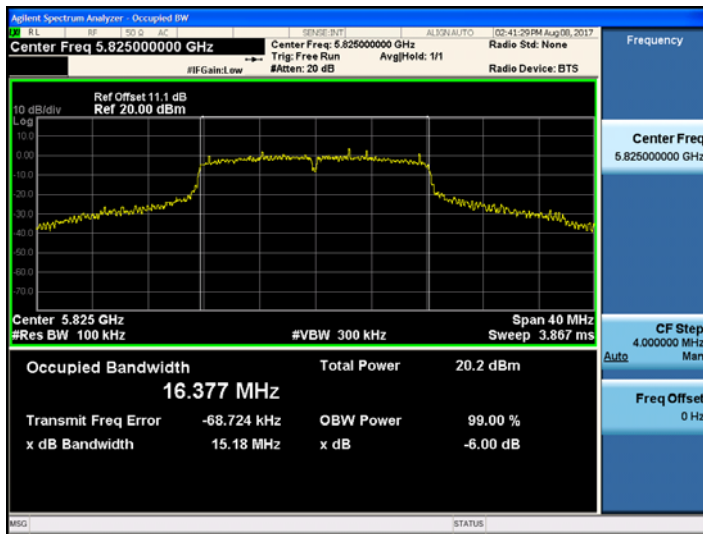

802.11n_HT20 UNII 3 BAND 6dB Bandwidth(CH.165)

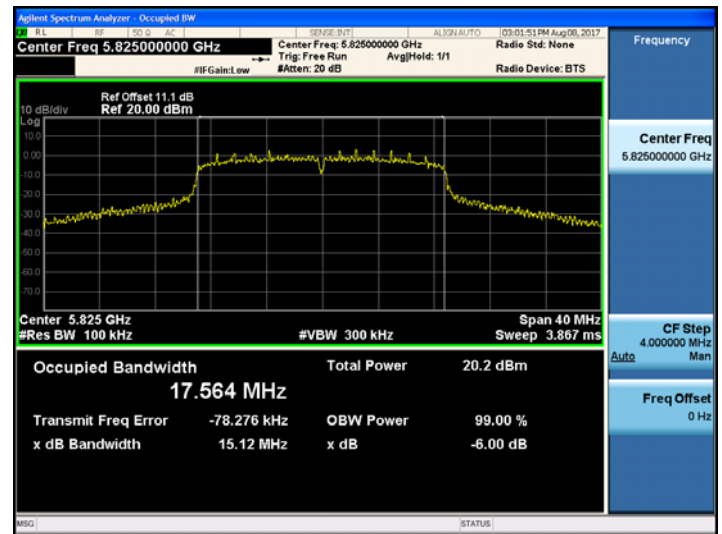

802.11ac_VHT20 UNII 3 BAND 6dB Bandwidth(CH.157)

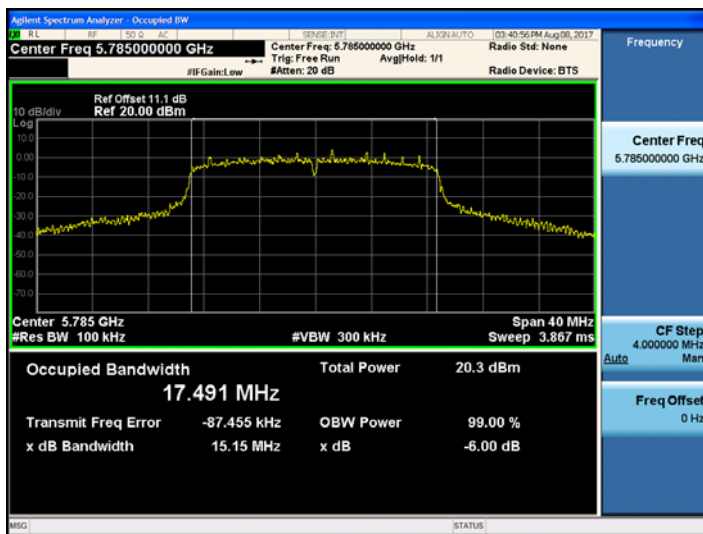

Note : In order to simplify the report, attached plots were only the most wide channel.

TEST RESULTS for 802.11n_HT40/ac_VHT40

Conducted 6 dB Bandwidth Measurements for 802.11n_HT40


802.11n_HT40 Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5755	151	35.13	0.5	Pass
5795	159	35.15	0.5	Pass

Conducted 6 dB Bandwidth Measurements for 802.11ac_VHT40


802.11ac_VHT40 Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5755	151	35.03	0.5	Pass
5795	159	35.18	0.5	Pass

TEST Plot for 802.11n_HT40/ac_VHT40

802.11n_HT40 UNII 3 BAND 6dB Bandwidth(CH.159)

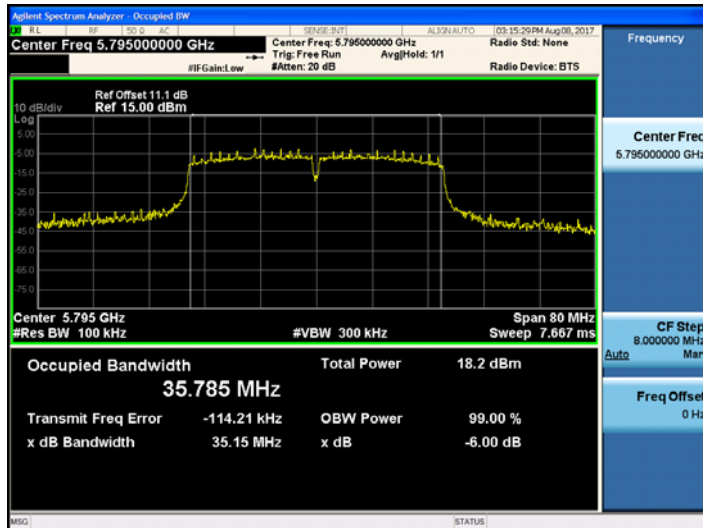

802.11ac_VHT40 UNII 3 BAND 6dB Bandwidth(CH.159)

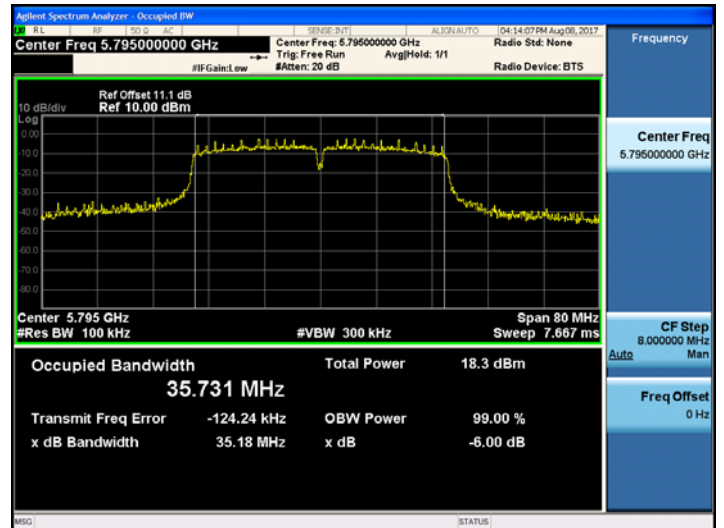


Note : In order to simplify the report, attached plots were only the most wide channel.

TEST RESULTS for 802.11ac_VHT80

Conducted 6 dB Bandwidth Measurements for 802.11ac_VHT80

802.11ac_VHT80 Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5775	155	75.07	0.5	Pass

TEST Plot for 802.11ac_VHT80

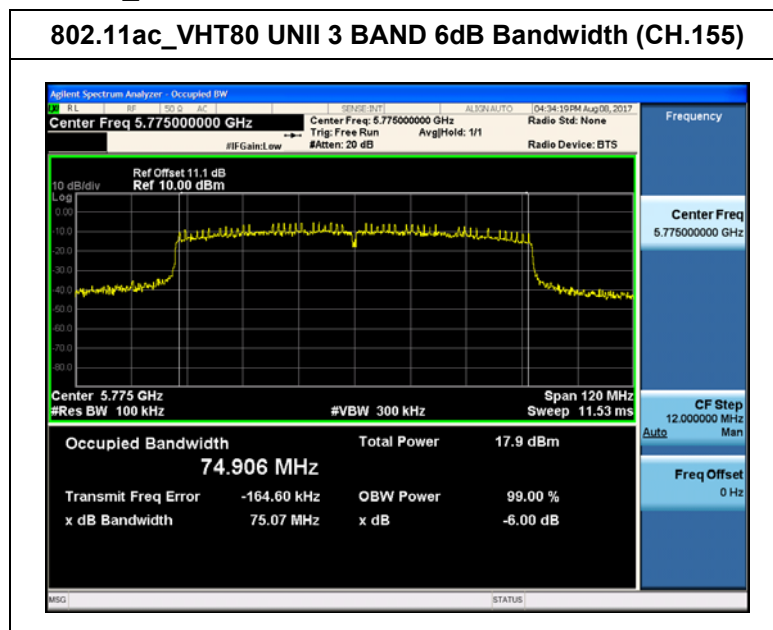

Note : In order to simplify the report, attached plots were only the most wide channel.

9.3 OUTPUT POWER MEASUREMENT


Test Requirements and limit, §15.407(a)(1)

A transmitter antenna terminal of EUT is connected to the input of a Power meter or Spectrum Analyzer .Measurement is made while the EUT is operating in transmission mode at the appropriate frequencies.

■ LIMIT

Band	Mode	Limit (dBm)
UNII 1	802.11a, n, ac	23.98
UNII 3	802.11a, n, ac	30.00

■ TEST CONFIGURATION(20 MHz BW)

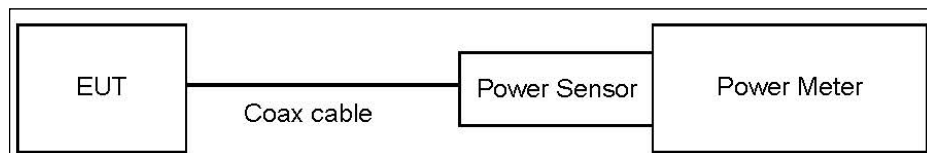

■ TEST PROCEDURE(20 MHz BW)

- Average Power (Procedure E.3.a in KDB 789033 D02 v01r04).
 1. Measure the duty cycle.
 2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 3. Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.


Note :

1. Actual value of loss for the attenuator and cable combination is below table.

Band	Loss(dB)
UNII 1, 3	12.1

(Actual value of loss for the attenuator and cable combination)

■ TEST CONFIGURATION(40 MHz BW & 80 MHz BW)

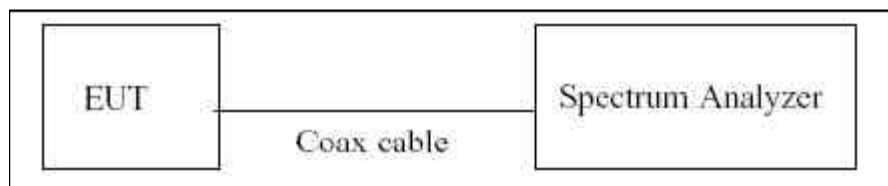

■ TEST PROCEDURE(40 MHz BW & 80 MHz BW)

▪ Average Power

The transmitter output is connected to the Spectrum Analyzer. We use the spectrum analyzer's integrated band power measurement function. We tested according to Method SA-2 in KDB 789033 D02 v01r04.

The Spectrum Analyzer is set to

1. Measure the duty cycle.
2. Set span to encompass the 26 dB EBW of the signal.
3. RBW = 1 MHz.
4. VBW \geq 3 MHz.
5. Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$.
6. Sweep time = auto.
7. Detector = RMS.
8. Do not use sweep triggering. Allow the sweep to "free run".
9. Trace average at least 100 traces in power averaging(RMS) mode
10. Integrated bandwidth = OBW
11. Add $10\log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

■ SAMPLE CALCULATION (Conducted)

Output Power = Reading Value + ATT loss + Cable loss(1 ea) + Duty Cycle Factor

Note:

1. Spectrum reading values are not plot data. The power results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. Actual value of loss for the attenuator and cable combination is below table.

Band	Loss(dB)
UNII 1, 3	12.1

(Actual value of loss for the attenuator and cable combination)

802.11a (UNII 1)

■ TEST RESULTS

Conducted Output Power Measurements (802.11a Mode: 5180~5240)

802.11a Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5180	36	6	12.00	0.24	12.24	23.98
		9	11.94	0.32	12.26	23.98
		12	11.84	0.46	12.31	23.98
		18	11.79	0.61	12.40	23.98
		24	11.59	0.80	12.38	23.98
		36	11.37	1.19	12.57	23.98
		48	11.14	1.51	12.65	23.98
		54	10.90	1.56	12.46	23.98
5200	40	6	11.97	0.24	12.21	23.98
		9	11.89	0.32	12.21	23.98
		12	11.71	0.46	12.17	23.98
		18	11.72	0.61	12.33	23.98
		24	11.50	0.80	12.30	23.98
		36	11.23	1.19	12.42	23.98
		48	11.07	1.51	12.58	23.98
		54	10.89	1.56	12.44	23.98
5240	48	6	11.78	0.24	12.02	23.98
		9	11.64	0.32	11.96	23.98
		12	11.52	0.46	11.99	23.98
		18	11.47	0.61	12.08	23.98
		24	11.28	0.80	12.08	23.98
		36	11.04	1.19	12.23	23.98
		48	10.80	1.51	12.32	23.98
		54	10.73	1.56	12.28	23.98

802.11a (UNII 3)

■ TEST RESULTS

Conducted Output Power Measurements (802.11a Mode: 5745~5825)

802.11a Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5745	149	6	11.33	0.24	11.57	30
		9	11.17	0.32	11.49	30
		12	11.10	0.46	11.56	30
		18	11.09	0.61	11.69	30
		24	10.96	0.80	11.76	30
		36	10.61	1.19	11.80	30
		48	10.46	1.51	11.98	30
		54	10.30	1.56	11.86	30
5785	157	6	12.07	0.24	12.31	30
		9	11.82	0.32	12.14	30
		12	11.74	0.46	12.20	30
		18	11.73	0.61	12.33	30
		24	11.60	0.80	12.40	30
		36	11.37	1.19	12.56	30
		48	11.09	1.51	12.60	30
		54	10.95	1.56	12.51	30
5825	165	6	11.56	0.24	11.80	30
		9	11.41	0.32	11.73	30
		12	11.33	0.46	11.79	30
		18	11.30	0.61	11.90	30
		24	11.06	0.80	11.85	30
		36	10.82	1.19	12.01	30
		48	10.62	1.51	12.14	30
		54	10.38	1.56	11.93	30

802.11n_HT20 (UNII 1)

■ TEST RESULTS

Conducted Output Power Measurements (802.11n_HT20 Mode: 5180~5240)

802.11n_HT20 Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5180	36	0	11.83	0.26	12.08	23.98
		1	11.54	0.44	11.99	23.98
		2	11.60	0.65	12.25	23.98
		3	11.56	0.82	12.38	23.98
		4	11.34	1.15	12.49	23.98
		5	11.06	1.44	12.49	23.98
		6	10.98	1.66	12.64	23.98
		7	10.92	1.67	12.58	23.98
5200	40	0	11.72	0.26	11.98	23.98
		1	11.39	0.44	11.84	23.98
		2	11.43	0.65	12.07	23.98
		3	11.56	0.82	12.38	23.98
		4	11.27	1.15	12.42	23.98
		5	11.01	1.44	12.45	23.98
		6	10.92	1.66	12.58	23.98
		7	10.81	1.67	12.47	23.98
5240	48	0	11.59	0.26	11.85	23.98
		1	11.29	0.44	11.73	23.98
		2	11.30	0.65	11.94	23.98
		3	11.36	0.82	12.18	23.98
		4	11.15	1.15	12.30	23.98
		5	10.80	1.44	12.24	23.98
		6	10.72	1.66	12.38	23.98
		7	10.60	1.67	12.26	23.98

802.11n_HT20 (UNII 3)

■ TEST RESULTS

Conducted Output Power Measurements (802.11n_HT20 Mode: 5745~5825)

802.11n_HT20 Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5745	149	0	11.00	0.26	11.26	30
		1	10.74	0.44	11.18	30
		2	10.79	0.65	11.43	30
		3	10.99	0.82	11.81	30
		4	10.69	1.15	11.84	30
		5	10.40	1.44	11.83	30
		6	10.35	1.66	12.01	30
		7	10.21	1.67	11.88	30
5785	157	0	11.59	0.26	11.85	30
		1	11.34	0.44	11.79	30
		2	11.31	0.65	11.95	30
		3	11.64	0.82	12.46	30
		4	11.41	1.15	12.56	30
		5	11.11	1.44	12.55	30
		6	10.95	1.66	12.61	30
		7	10.87	1.67	12.54	30
5825	165	0	11.38	0.26	11.64	30
		1	11.07	0.44	11.51	30
		2	11.04	0.65	11.69	30
		3	11.18	0.82	12.00	30
		4	10.86	1.15	12.01	30
		5	10.65	1.44	12.09	30
		6	10.55	1.66	12.21	30
		7	10.35	1.67	12.02	30

802.11ac_VHT20 (UNII 1)

■ TEST RESULTS
Conducted Output Power Measurements (802.11ac_VHT20 Mode: 5180~5240)

802.11ac_VHT20 Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5180	36	0	11.85	0.23	12.08	23.98
		1	11.53	0.41	11.94	23.98
		2	11.53	0.58	12.11	23.98
		3	11.64	0.74	12.38	23.98
		4	11.39	1.06	12.45	23.98
		5	11.07	1.30	12.37	23.98
		6	11.04	1.43	12.46	23.98
		7	10.81	1.52	12.33	23.98
		8	10.64	1.73	12.37	23.98
5200	40	0	11.72	0.23	11.96	23.98
		1	11.45	0.41	11.86	23.98
		2	11.42	0.58	12.01	23.98
		3	11.53	0.74	12.27	23.98
		4	11.25	1.06	12.31	23.98
		5	11.10	1.30	12.40	23.98
		6	10.96	1.43	12.39	23.98
		7	10.81	1.52	12.33	23.98
		8	10.65	1.73	12.38	23.98
5240	48	0	11.50	0.23	11.73	23.98
		1	11.28	0.41	11.68	23.98
		2	11.25	0.58	11.83	23.98
		3	11.37	0.74	12.11	23.98
		4	11.12	1.06	12.17	23.98
		5	10.86	1.30	12.16	23.98
		6	10.72	1.43	12.15	23.98
		7	10.60	1.52	12.12	23.98
		8	10.43	1.73	12.16	23.98

802.11ac_VHT20 (UNII 3)

■ TEST RESULTS
Conducted Output Power Measurements (802.11ac_VHT20 Mode: 5745~5825)

802.11ac_VHT20 Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5745	149	0	11.09	0.23	11.32	30
		1	10.76	0.41	11.17	30
		2	10.68	0.58	11.27	30
		3	11.11	0.74	11.85	30
		4	10.74	1.06	11.80	30
		5	10.48	1.30	11.79	30
		6	10.37	1.43	11.80	30
		7	10.19	1.52	11.71	30
		8	10.03	1.73	11.76	30
5785	157	0	11.57	0.23	11.81	30
		1	11.23	0.41	11.64	30
		2	11.34	0.58	11.92	30
		3	11.72	0.74	12.46	30
		4	11.39	1.06	12.45	30
		5	11.16	1.30	12.46	30
		6	11.03	1.43	12.46	30
		7	10.85	1.52	12.37	30
		8	10.74	1.73	12.47	30
5825	165	0	11.38	0.23	11.62	30
		1	11.02	0.41	11.43	30
		2	11.06	0.58	11.65	30
		3	11.16	0.74	11.90	30
		4	10.91	1.06	11.97	30
		5	10.64	1.30	11.94	30
		6	10.60	1.43	12.03	30
		7	10.37	1.52	11.89	30
		8	10.17	1.73	11.90	30

802.11n_HT40 (UNII 1)

■ TEST RESULTS

Conducted Output Power Measurements (802.11n_HT40 Mode: 5190~5230)

802.11n_HT40 Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5190	38	0	8.04	0.46	8.50	23.98
		1	7.68	0.85	8.53	23.98
		2	7.35	1.17	8.52	23.98
		3	6.93	1.46	8.38	23.98
		4	6.48	1.94	8.42	23.98
		5	6.23	2.32	8.54	23.98
		6	6.13	2.45	8.58	23.98
		7	5.97	2.63	8.60	23.98
5230	46	0	7.90	0.46	8.36	23.98
		1	7.53	0.85	8.38	23.98
		2	7.19	1.17	8.37	23.98
		3	6.87	1.46	8.33	23.98
		4	6.37	1.94	8.31	23.98
		5	6.13	2.32	8.44	23.98
		6	6.09	2.45	8.54	23.98
		7	5.86	2.63	8.49	23.98

802.11n_HT40 (UNII 3)

■ TEST RESULTS

Conducted Output Power Measurements (802.11n_HT40 Mode: 5755~5795)


802.11n_HT40 Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5755	151	0	7.46	0.46	7.93	30
		1	7.15	0.85	8.00	30
		2	6.79	1.17	7.96	30
		3	6.54	1.46	8.00	30
		4	6.12	1.94	8.06	30
		5	5.75	2.32	8.06	30
		6	5.65	2.45	8.10	30
		7	5.45	2.63	8.07	30
5795	159	0	7.93	0.46	8.40	30
		1	7.41	0.85	8.26	30
		2	7.13	1.17	8.30	30
		3	6.79	1.46	8.25	30
		4	6.48	1.94	8.42	30
		5	6.13	2.32	8.45	30
		6	6.00	2.45	8.45	30
		7	5.81	2.63	8.44	30

■ TEST Plot _802.11n_HT40

802.11n_HT40 UNII 1 BAND Average Power
(5190 MHz ~5230 MHz) CH 38 MCS7



802.11n_HT40 UNII 3 BAND Average Power
(5755 MHz ~5795 MHz) CH 159 MCS5

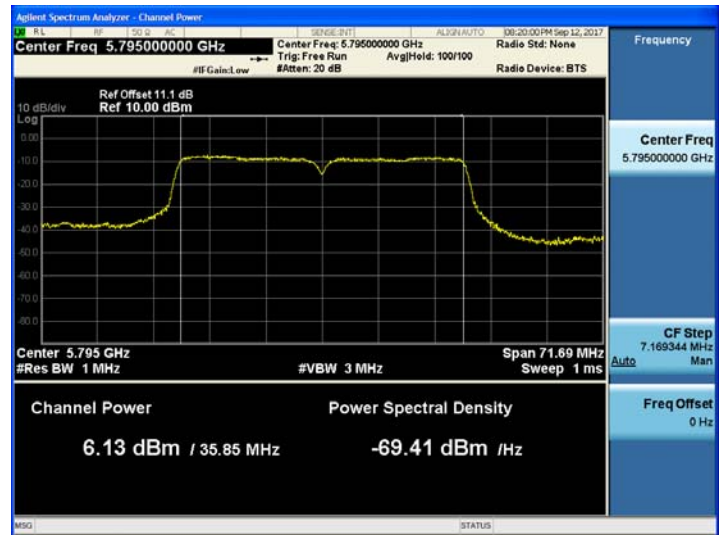

802.11ac_VHT40 (UNII 1)

■ TEST RESULTS
Conducted Output Power Measurements (802.11ac_VHT40 Mode: 5190~5230)

802.11ac_VHT40 Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5190	38	0	7.93	0.46	8.39	23.98
		1	7.59	0.83	8.42	23.98
		2	7.29	1.08	8.38	23.98
		3	6.94	1.45	8.39	23.98
		4	6.54	1.77	8.31	23.98
		5	6.26	2.10	8.35	23.98
		6	6.14	2.24	8.38	23.98
		7	5.90	2.39	8.30	23.98
		8	5.76	2.65	8.41	23.98
		9	5.64	2.72	8.36	23.98
5230	46	0	7.93	0.46	8.39	23.98
		1	7.60	0.83	8.43	23.98
		2	7.24	1.08	8.32	23.98
		3	6.91	1.45	8.37	23.98
		4	6.54	1.77	8.31	23.98
		5	6.17	2.10	8.27	23.98
		6	6.10	2.24	8.34	23.98
		7	5.86	2.39	8.26	23.98
		8	5.69	2.65	8.35	23.98
		9	5.54	2.72	8.26	23.98

802.11ac_VHT40 (UNII 3)

■ TEST RESULTS
Conducted Output Power Measurements (802.11ac_VHT40 Mode: 5755~5795)

802.11ac_VHT40 Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5755	151	0	7.44	0.46	7.89	30
		1	7.14	0.83	7.97	30
		2	6.80	1.08	7.88	30
		3	6.57	1.45	8.03	30
		4	6.13	1.77	7.91	30
		5	5.79	2.10	7.89	30
		6	5.68	2.24	7.92	30
		7	5.51	2.39	7.90	30
		8	5.29	2.65	7.94	30
		9	5.21	2.72	7.93	30
5795	159	0	7.88	0.46	8.34	30
		1	7.57	0.83	8.40	30
		2	7.30	1.08	8.39	30
		3	7.08	1.45	8.53	30
		4	6.43	1.77	8.20	30
		5	6.12	2.10	8.21	30
		6	5.99	2.24	8.23	30
		7	5.82	2.39	8.21	30
		8	5.62	2.65	8.27	30
		9	5.47	2.72	8.20	30

■ TEST Plot _802.11ac_VHT40

802.11ac_VHT40 UNII 1 BAND Average Power
(5190 MHz ~5230 MHz) CH 46 MCS1



802.11ac_VHT40 UNII 3 BAND Average Power
(5755 MHz ~5795 MHz) CH 159 MCS3



802.11ac_VHT80 (UNII 1)

■ TEST RESULTS

Conducted Output Power Measurements (802.11ac_VHT80 Mode: 5210)

802.11ac_VHT80 Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5210	42	0	6.40	0.82	7.22	23.98
		1	5.86	1.41	7.27	23.98
		2	5.37	1.98	7.35	23.98
		3	5.16	2.21	7.37	23.98
		4	4.70	2.72	7.42	23.98
		5	4.25	3.23	7.48	23.98
		6	4.11	3.24	7.35	23.98
		7	4.11	3.33	7.44	23.98
		8	3.86	3.56	7.42	23.98
		9	3.73	3.70	7.43	23.98

802.11ac_VHT80 (UNII 3)

■ TEST RESULTS

Conducted Output Power Measurements (802.11ac_VHT80 Mode: 5775 MHz)

802.11ac_VHT80 Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5775	155	0	5.68	0.82	6.50	30
		1	5.22	1.41	6.63	30
		2	4.85	1.98	6.82	30
		3	4.65	2.21	6.86	30
		4	4.10	2.72	6.82	30
		5	3.72	3.23	6.95	30
		6	3.59	3.24	6.84	30
		7	3.52	3.33	6.85	30
		8	3.27	3.56	6.84	30
		9	3.07	3.70	6.77	30

■ TEST Plot for 802.11ac_VHT80

802.11ac_VHT80 UNII 1 BAND Average Power
(5210 MHz) CH 42 MCS5



802.11ac_VHT80 UNII 3 BAND Average Power
(5775 MHz) CH 155 MCS5




9.4 POWER SPECTRAL DENSITY

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies. The maximum permissible peak power spectral density is 11 dBm/ MHz for UNII 1 and 30 dBm/500 kHz for UNII 3.

■ LIMIT

Power Spectral Density

Band	Mode	Limit
UNII 1	802.11a, n, ac	11 dBm/MHz
UNII 3	802.11a, n, ac	30 dBm/500 kHz

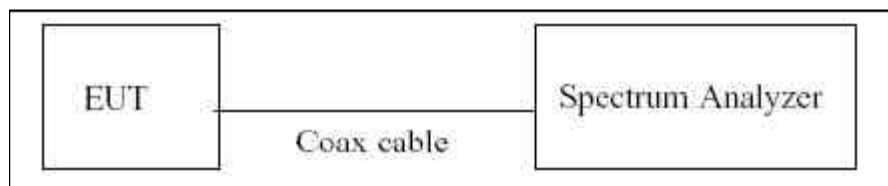■ TEST CONFIGURATION**■ TEST PROCEDURE**

We tested according to Method in KDB 789033 D02 v01r04.

The spectrum analyzer is set to :

1. Set span to encompass the entire emission bandwidth(EBW) of the signal.
2. RBW = 1 MHz(510 kHz for UNII 3)
3. VBW \geq 3 MHz
4. Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$.
5. Sweep time = auto.
6. Detector = RMS(i.e., power averaging), if available. Otherwise, use sample detector mode.
7. Do not use sweep triggering. Allow the sweep to “free run”.
8. Trace average at least 100 traces in power averaging(RMS) mode
9. Use the peak search function on the spectrum analyzer to find the peak of the spectrum.
10. If Method SA-2 was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum.

■ SAMPLE CALCULATION

PSD = Reading Value + ATT loss + Cable loss(1 ea) + Duty Cycle Factor

Output Power = 5 dBm + 10 dB + 0.8 dB + 0.21 dB = 16.01 dBm

Note :

1. Spectrum reading values are not plot data. The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 5.2 GHz, 5.3 GHz and 5.6 GHz range that was rounded off to the closest tenth dB. Actual value of loss for the attenuator and cable combination is below table.

Band	Loss(dB)
UNII 1, 3	12.1

(Actual value of loss for the attenuator and cable combination)


☒ 802.11a
☒ TEST RESULTS

Conducted Power Density Measurements

Frequency (MHz)	Channel No.	Mode	Test Result				
			Measured Power Density (dBm)	Duty Cycle Factor (dB)	Measured Power Density(dBm) + Duty Cycle Factor	Limit (dBm)	Pass/Fail
5180	36	802.11a	1.256	1.513	2.769	11	Pass
5200	40		1.187	1.513	2.700		Pass
5240	48		1.323	1.513	2.836		Pass
5745	149		-1.465	1.513	0.048	30	Pass
5785	157		-0.710	1.513	0.803		Pass
5825	165		-0.925	1.556	0.631		Pass

☒ TEST Plot for 802.11a

802.11a UNII 1 BAND PSD CH 48

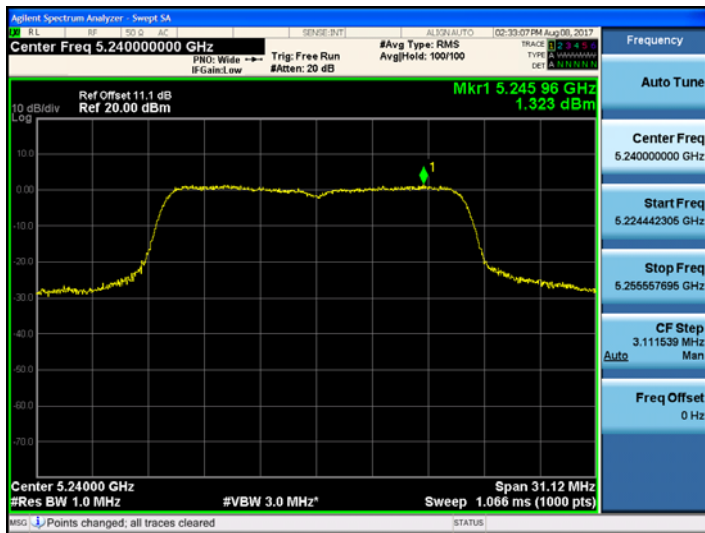

802.11a UNII 3 BAND PSD CH 157




802.11n_HT20
TEST RESULTS

Conducted Power Density Measurements


Frequency (MHz)	Channel No.	Mode	Test Result				
			Measured Power Density (dBm)	Duty Cycle Factor (dB)	Measured Power Density(dBm) + Duty Cycle Factor	Limit (dBm)	Pass/Fail
5180	36	802.11n_HT20	1.303	1.436	2.739	11	Pass
5200	40		1.089	1.658	2.747		Pass
5240	48		1.127	1.658	2.785		Pass
5745	149		-1.301	1.658	0.357	30	Pass
5785	157		-0.734	1.658	0.924		Pass
5825	165		-1.499	1.658	0.159		Pass

TEST Plot for 802.11n_HT20

802.11n_HT20 UNII 1 BAND PSD CH 48

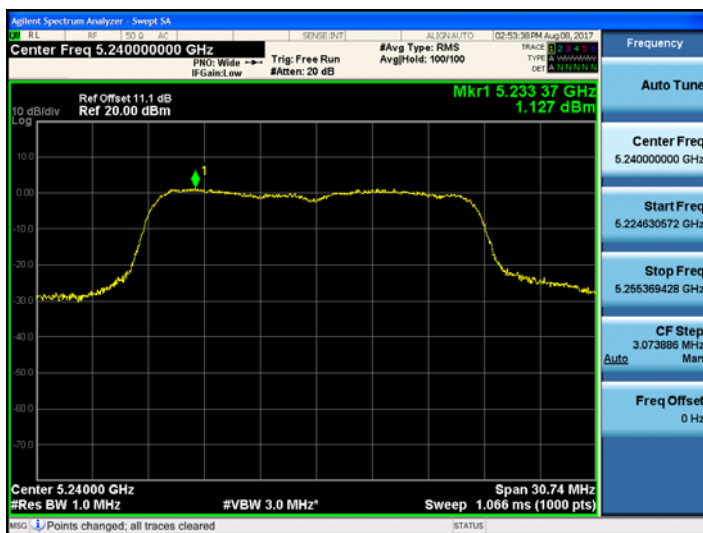

802.11n_HT20 UNII 3 BAND PSD CH 157

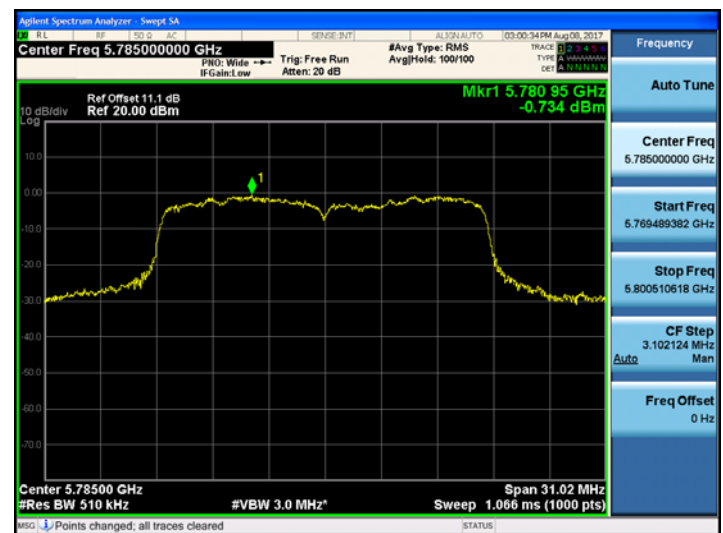

802.11ac_VHT20


TEST RESULTS

Conducted Power Density Measurements


Frequency (MHz)	Channel No.	Mode	Test Result				
			Measured Power Density (dBm)	Duty Cycle Factor (dB)	Measured Power Density(dBm) + Duty Cycle Factor	Limit (dBm)	Pass/Fail
5180	36	802.11ac_VHT20	0.992	1.303	2.295	11	Pass
5200	40		0.635	1.521	2.156		Pass
5240	48		0.955	1.303	2.258		Pass
5745	149		-1.723	1.427	-0.296	30	Pass
5785	157		-1.348	1.731	0.383		Pass
5825	165		-1.456	1.427	-0.029		Pass

TEST Plot for 802.11ac_VHT20

802.11ac_VHT20 UNII 1 BAND PSD CH 36

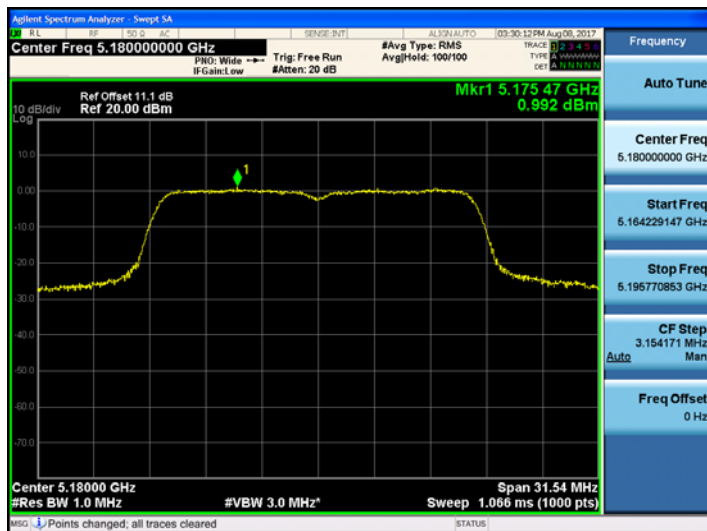

802.11ac_VHT20 UNII 3 BAND PSD CH 157

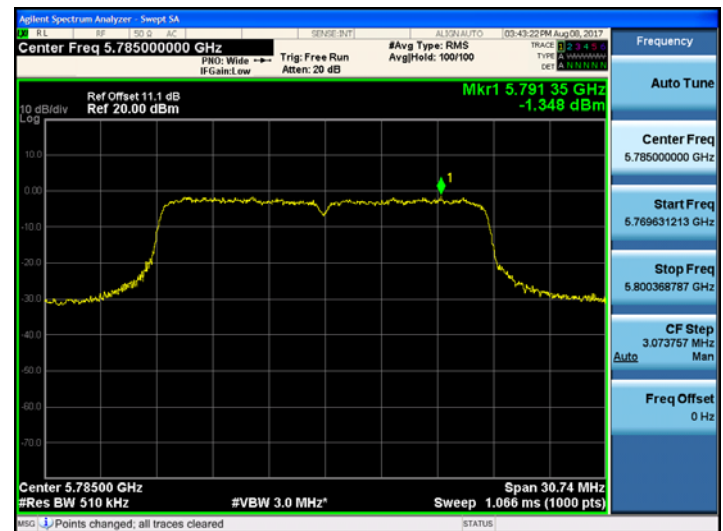

■ 802.11n_HT40
■ TEST RESULTS

Conducted Power Density Measurements


Frequency (MHz)	Channel No.	Mode	Test Result				
			Measured Power Density (dBm)	Duty Cycle Factor (dB)	Measured Power Density(dBm) + Duty Cycle Factor	Limit (dBm)	Pass/Fail
5190	38	802.11n_HT40	-5.006	2.316	-2.690	11	Pass
5230	46		-5.225	2.452	-2.773	11	Pass
5755	151		-7.817	2.316	-5.501	30	Pass
5795	159		-6.982	2.452	-4.530	30	Pass

■ TEST Plot for 802.11n_HT40

802.11n_HT40 UNII 1 BAND PSD CH 38



802.11n_HT40 UNII 3 BAND PSD CH 159

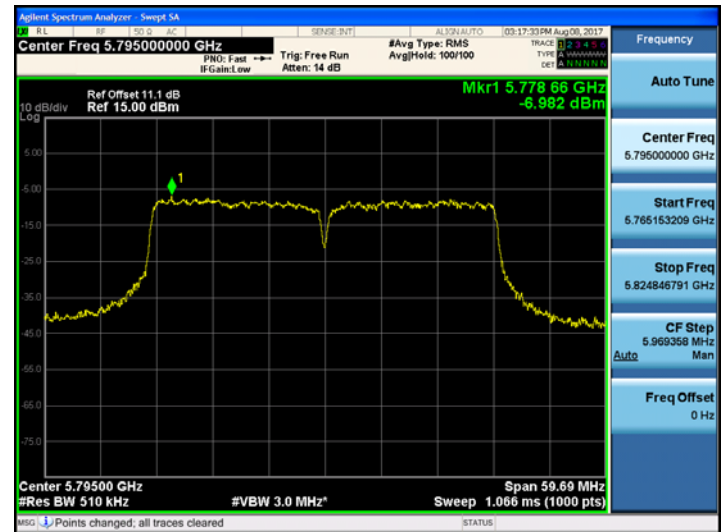

802.11ac_VHT40


TEST RESULTS

Conducted Power Density Measurements


Frequency (MHz)	Channel No.	Mode	Test Result				
			Measured Power Density (dBm)	Duty Cycle Factor (dB)	Measured Power Density(dBm) + Duty Cycle Factor	Limit (dBm)	Pass/Fail
5190	38	802.11ac_VHT40	-3.784	0.832	-2.952	11	Pass
5230	46		-3.764	0.456	-3.308	11	Pass
5755	151		-6.661	0.832	-5.829	30	Pass
5795	159		-6.276	0.832	-5.444	30	Pass

TEST Plot for 802.11ac_VHT40

802.11ac_VHT40 UNII 1 BAND PSD CH 38

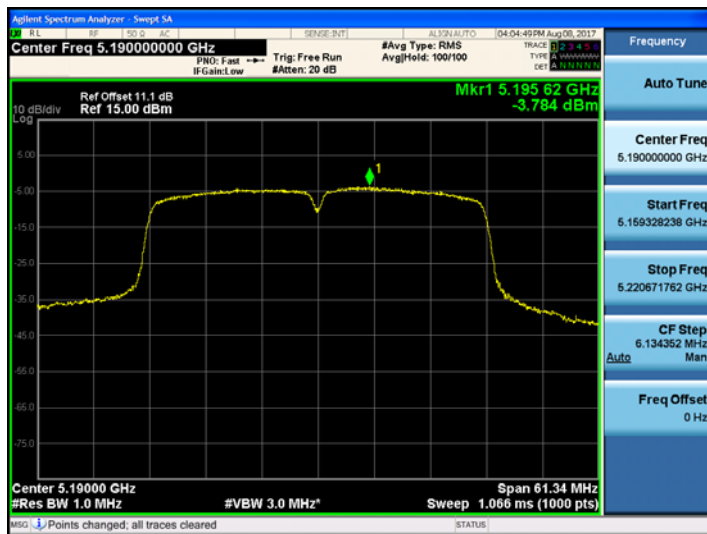

802.11ac_VHT40 UNII 3 BAND PSD CH 159

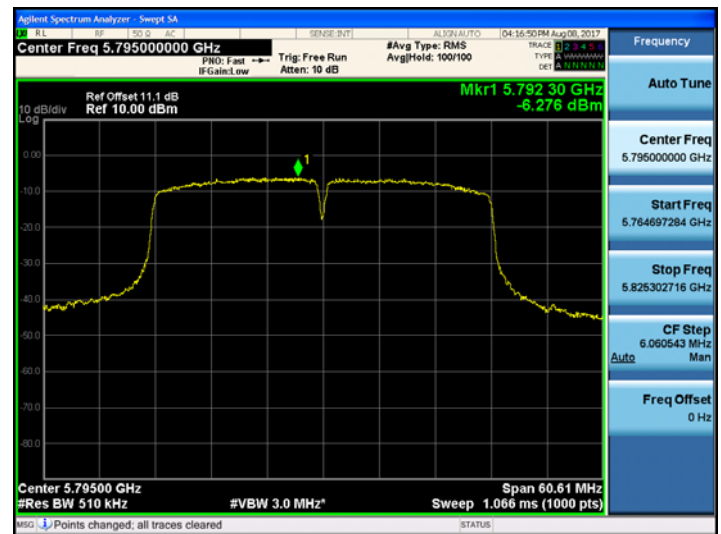

802.11ac_VHT80

TEST RESULTS

Conducted Power Density Measurements


Frequency (MHz)	Channel No.	Mode	Test Result				
			Measured Power Density (dBm)	Duty Cycle Factor (dB)	Measured Power Density(dBm) + Duty Cycle Factor	Limit (dBm)	Pass/Fail
5210	42	802.11ac_VHT80	-9.000	3.231	-5.769	11	Pass
5775	155		-11.488	3.231	-8.257	30	Pass

TEST Plot for 802.11ac_VHT80

802.11ac_VHT80 UNII 1 BAND PSD CH 42



802.11ac_VHT80 UNII 3 BAND PSD CH 155

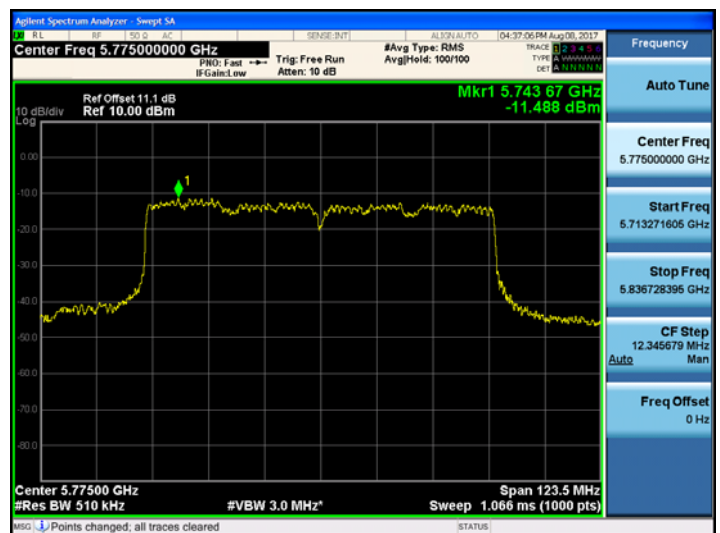

9.5 FREQUENCY STABILITY

The EUT was placed inside an environmental chamber as the temperature in the chamber was varied between -30 °C and 50 °C. The temperature was incremented by 10 °C intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.

20 MHz BW

OPERATING BAND:	UNII Band 1
OPERATING FREQUENCY:	5,180,000,000 Hz
CHANNEL:	36
REFERENCE VOLTAGE:	12 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	12.00	+20(Ref)	5180024.35	24.35
100%		-30	5179993.34	-6.66
100%		-20	5179997.88	-2.12
100%		-10	5180004.99	4.99
100%		0	5180012.14	12.14
100%		+10	5180019.47	19.47
100%		+30	5180032.55	32.55
100%		+40	5180038.12	38.12
100%		+50	5180043.89	43.89
115%	13.80	+20	5180011.54	11.54
Batt. Endpoint	10.20	+20	5180018.85	18.85

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 3
 OPERATING FREQUENCY: 5,745,000,000 Hz
 CHANNEL: 149
 REFERENCE VOLTAGE: 12 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	12.00	+20(Ref)	5745021.08	21.08
100%		-30	5744993.54	-6.46
100%		-20	5744999.65	-0.35
100%		-10	5745006.75	6.75
100%		0	5745012.02	12.02
100%		+10	5745019.85	19.85
100%		+30	5745031.72	31.72
100%		+40	5745038.02	38.02
100%		+50	5745042.16	42.16
115%	13.80	+20	5745012.47	12.47
Batt. Endpoint	10.20	+20	5745020.73	20.73

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

40 MHz BW

OPERATING BAND: UNII Band 1
 OPERATING FREQUENCY: 5,190,000,000 Hz
 CHANNEL: 38
 REFERENCE VOLTAGE: 12 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	12.00	+20(Ref)	5190027.29	27.29
100%		-30	5189990.21	-9.79
100%		-20	5189997.26	-2.74
100%		-10	5190004.53	4.53
100%		0	5190011.23	11.23
100%		+10	5190018.79	18.79
100%		+30	5190030.33	30.33
100%		+40	5190037.50	37.50
100%		+50	5190041.80	41.80
115%	13.80	+20	5190008.86	8.86
Batt. Endpoint	10.20	+20	5190019.30	19.30

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 3
 OPERATING FREQUENCY: 5,755,000,000 Hz
 CHANNEL: 151
 REFERENCE VOLTAGE: 12 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	12.00	+20(Ref)	5755030.27	30.27
100%		-30	5754999.49	-0.51
100%		-20	5755007.55	7.55
100%		-10	5755012.26	12.26
100%		0	5755016.85	16.85
100%		+10	5755021.71	21.71
100%		+30	5755030.47	30.47
100%		+40	5755037.62	37.62
100%		+50	5755044.95	44.95
115%	13.80	+20	5755016.73	16.73
Batt. Endpoint	10.20	+20	5755021.41	21.41

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

80 MHz BW

OPERATING BAND: UNII Band 1
 OPERATING FREQUENCY: 5,210,000,000 Hz
 CHANNEL: 42
 REFERENCE VOLTAGE: 12 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	12.00	+20(Ref)	5210027.20	27.20
100%		-30	5209995.21	-4.79
100%		-20	5210000.95	0.95
100%		-10	5210006.88	6.88
100%		0	5210014.35	14.35
100%		+10	5210018.58	18.58
100%		+30	5210032.42	32.42
100%		+40	5210037.81	37.81
100%		+50	5210045.85	45.85
115%	13.80	+20	5210013.30	13.30
Batt. Endpoint	10.20	+20	5210018.53	18.53

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 3
 OPERATING FREQUENCY: 5,775,000,000 Hz
 CHANNEL: 155
 REFERENCE VOLTAGE: 12 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	12.00	+20(Ref)	5775021.07	21.07
100%		-30	5774996.92	-3.08
100%		-20	5775004.00	4.00
100%		-10	5775011.88	11.88
100%		0	5775017.03	17.03
100%		+10	5775021.75	21.75
100%		+30	5775031.96	31.96
100%		+40	5775038.69	38.69
100%		+50	5775044.50	44.50
115%	13.80	+20	5775017.84	17.84
Batt. Endpoint	10.20	+20	5775020.85	20.85

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

9.6 RADIATED MEASUREMENT

9.6.1 RADIATED SPURIOUS EMISSIONS.

Test Requirements and limit, §15.205, §15.209, §15.407

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


■ §15.407, KDB 789033 D02

All harmonics that do not lie in a restricted band are subject to a peak limit of -27 dBm/MHz. At a distance of 3 meters the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions of 68.2 dBμV/m.


Especially, for transmitter operating in the 5725 Mhz – 5850 MHz : all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequency 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

TEST CONFIGURATION


Below 30 MHz

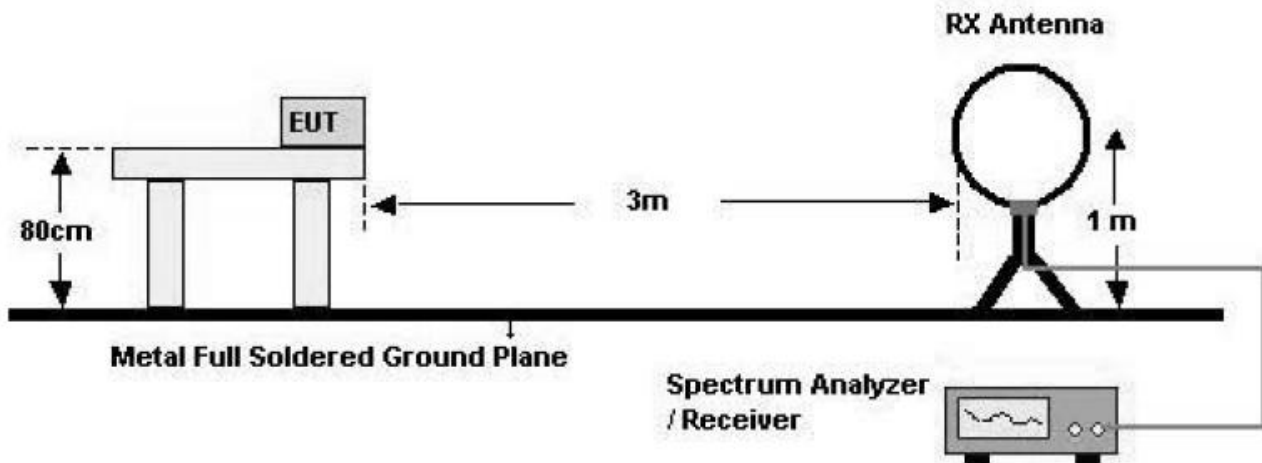

30 MHz - 1 GHz

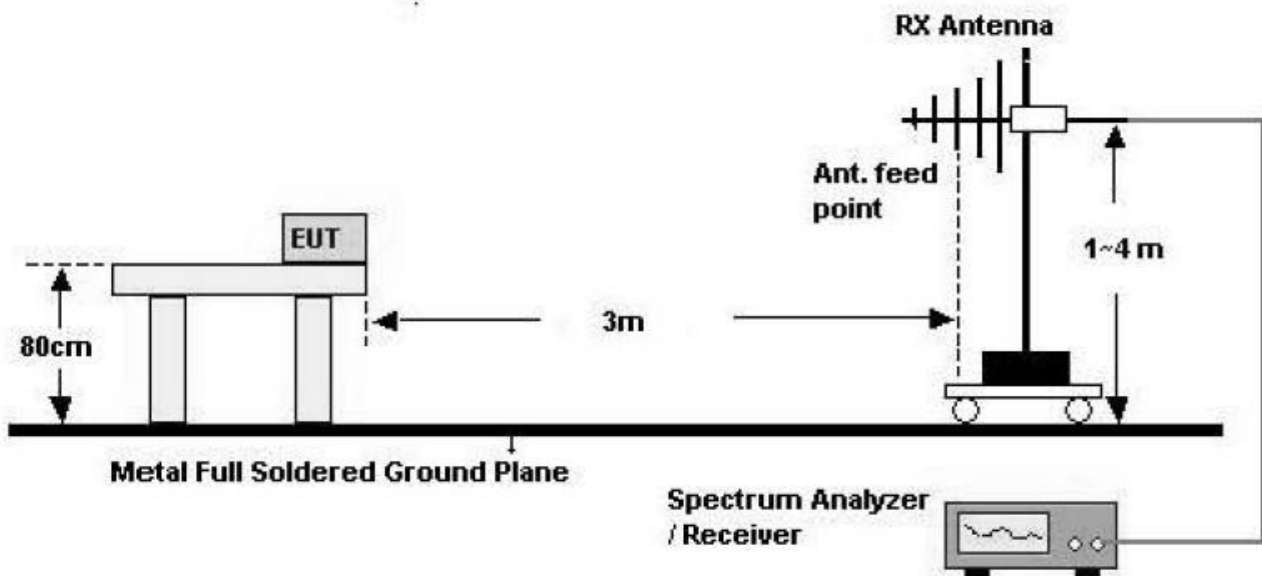

Above 1 GHz

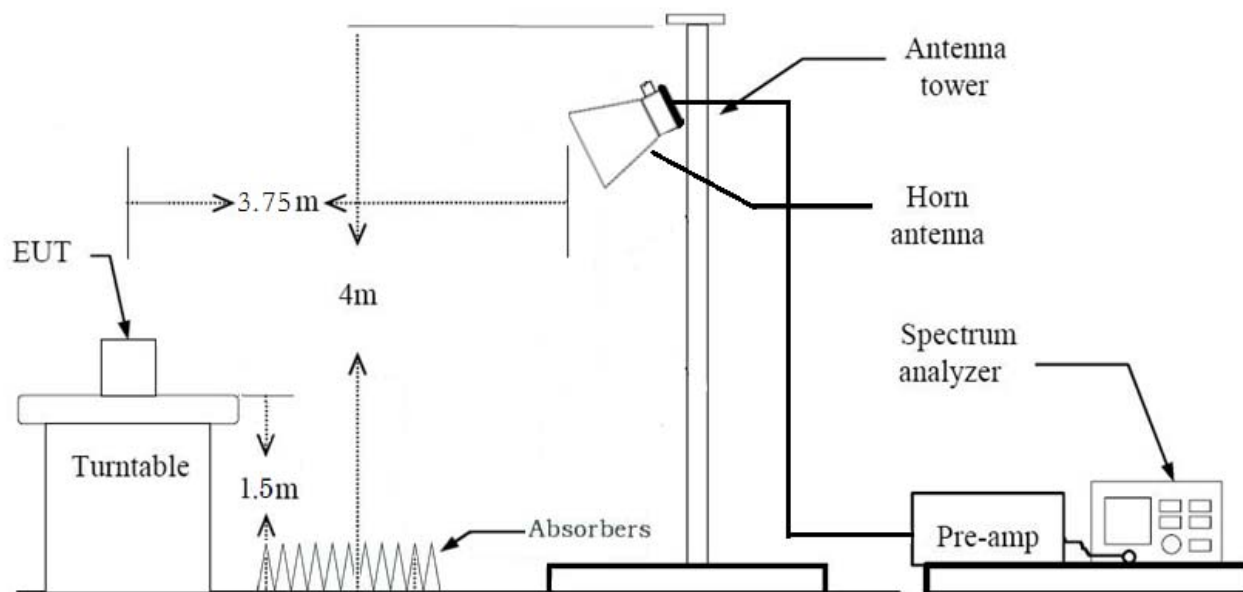

TEST PROCEDURE USED

ANSI C63.10:2013

Method G)5) in KDB 789033 D02 v01r04 (Peak)

Method G)6)d) in KDB 789033 D02 v01r04 (Average)

. Spectrum setting:

- Peak.

1. RBW = 1 MHz

2. VBW \geq 3 MHz

3. Detector = Peak

4. Sweep Time = auto

5. Trace mode = max hold

6. Allow sweeps to continue until the trace stabilizes.

7. Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle.

- Average (Method VB :Averaging using reduced video bandwidth)

1. RBW = 1 MHz

2. VBW

2.1. If the EUT is configured to transmit with duty cycle \geq 98 percent, set VBW \leq RBW/100(i.e., 10 kHz) but not less than 10 Hz.

2.2. If the EUT duty cycle is $<$ 98 percent, set VBW \geq $1/T$, where T is the minimum transmission

duration.

3. The analyzer is set to linear detector mode.
4. Detector = Peak.
5. Sweep time = auto.
6. Trace mode = max hold.
7. Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 percent duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle.

Note :

1. We used the Method VB for 802.11a/n(HT20, HT40), ac(VHT20, VHT40, VHT80) mode to perform the average filed strength measurements.
2. The actual setting value of VBW for 802.11a/n(HT20, HT40), ac(VHT20, VHT40, VHT80)
3. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor(reference distance : 3 m).
4. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Mode	Worst Data rate (Mbps)	T_{on} (ms)	T_{total} (ms)	Duty Cycle (%)	VBW(1/T) (Hz)	The actual setting value of VBW (Hz)
a	6	2.063	2.180	94.63	485	1000
n_HT20	MCS 0	1.924	2.041	94.27	520	1000
ac_VHT20	MCS 0	1.935	2.042	94.79	517	1000
n_HT40	MCS 0	0.947	1.054	89.88	1056	3000
ac_VHT40	MCS 0	0.953	1.058	90.04	1050	3000
ac_VHT80	MCS 0	0.465	0.561	82.83	2152	10000

TEST RESULTS**9 kHz – 30MHz****Operation Mode:** Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	$\text{dB}\mu\text{V}$	dB /m	dB	(H/V)	$\text{dB}\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$	dB
No Critical peaks found							

Notes:

1. Measuring frequencies from 9 kHz to the 30MHz.
2. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
3. Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB)
4. Limit line = specific Limits (dBuV) + Distance extrapolation factor
5. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
6. The test results for below 30 MHz is correlated to an open site.

The result on OATS is about 2 dB higher than semi-anechoic chamber (10 m chamber)

TEST RESULTS**Below 1 GHz****Operation Mode:** Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	$\text{dB}\mu\text{V}$	dB /m	dB	(H/V)	$\text{dB}\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$	dB
No Critical peaks found							

Notes:

1. Measuring frequencies from 30 MHz to the 1 GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Above 1 GHz

Band :	UNII 1
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10360	58.20	-2.49	V	55.71	68.20	12.49	PK
15540	53.03	-2.80	V	50.23	73.98	23.75	PK
15540	41.05	-2.80	V	38.25	53.98	15.73	AV
10360	57.30	-2.49	H	54.81	68.20	13.39	PK
15540	52.54	-2.80	H	49.74	73.98	24.24	PK
15540	40.88	-2.80	H	38.08	53.98	15.90	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 1
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5200 MHz
Channel No.	40 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10400	58.83	-2.40	V	56.43	68.20	11.77	PK
15600	53.40	-4.04	V	49.36	73.98	24.62	PK
15600	41.54	-4.04	V	37.50	53.98	16.48	AV
10400	58.01	-2.40	H	55.61	68.20	12.59	PK
15600	53.02	-4.04	H	48.98	73.98	25.00	PK
15600	41.18	-4.04	H	37.14	53.98	16.84	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 1
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5240 MHz
Channel No.	48 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10480	57.91	-3.56	V	54.35	68.20	13.85	PK
15720	52.66	-4.05	V	48.61	73.98	25.37	PK
15720	41.34	-4.05	V	37.29	53.98	16.69	AV
10480	57.54	-3.56	H	53.98	68.20	14.22	PK
15720	52.33	-4.05	H	48.28	73.98	25.70	PK
15720	41.17	-4.05	H	37.12	53.98	16.86	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 1
Operation Mode:	802.11 n_HT20
Transfer MCS Index:	0
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10360	57.57	-2.49	V	55.08	68.20	13.12	PK
15540	53.71	-2.80	V	50.91	73.98	23.07	PK
15540	41.39	-2.80	V	38.59	53.98	15.39	AV
10360	57.09	-2.49	H	54.60	68.20	13.60	PK
15540	53.44	-2.80	H	50.64	73.98	23.34	PK
15540	41.08	-2.80	H	38.28	53.98	15.70	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_HT20. Worst case is MCS0 in 802.11n_HT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 1
Operation Mode:	802.11 n_ HT20
Transfer MCS Index:	0
Operating Frequency	5200 MHz
Channel No.	40 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10400	58.82	-2.40	V	56.42	68.20	11.78	PK
15600	54.42	-4.04	V	50.38	73.98	23.60	PK
15600	41.71	-4.04	V	37.67	53.98	16.31	AV
10400	58.43	-2.40	H	56.03	68.20	12.17	PK
15600	54.21	-4.04	H	50.17	73.98	23.81	PK
15600	41.55	-4.04	H	37.51	53.98	16.47	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_ HT20. Worst case is MCS0 in 802.11n_ HT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 1
Operation Mode:	802.11 n_ HT20
Transfer MCS Index:	0
Operating Frequency	5240 MHz
Channel No.	48 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10480	58.65	-3.56	V	55.09	68.20	13.11	PK
15720	53.14	-4.05	V	49.09	73.98	24.89	PK
15720	41.80	-4.05	V	37.75	53.98	16.23	AV
10480	58.34	-3.56	H	54.78	68.20	13.42	PK
15720	52.87	-4.05	H	48.82	73.98	25.16	PK
15720	41.52	-4.05	H	37.47	53.98	16.51	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_ HT20. Worst case is MCS0 in 802.11n_ HT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 1
Operation Mode:	802.11 ac_VHT20
Transfer MCS Index:	0
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10360	58.28	-2.49	V	55.79	68.20	12.41	PK
15540	52.90	-2.80	V	50.10	73.98	23.88	PK
15540	41.33	-2.80	V	38.53	53.98	15.45	AV
10360	57.99	-2.49	H	55.50	68.20	12.70	PK
15540	52.68	-2.80	H	49.88	73.98	24.10	PK
15540	41.03	-2.80	H	38.23	53.98	15.75	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_VHT20. Worst case is MCS0 in 802.11ac_VHT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 1
Operation Mode:	802.11 ac_ VHT20
Transfer MCS Index:	0
Operating Frequency	5200 MHz
Channel No.	40 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10400	58.29	-2.40	V	55.89	68.20	12.31	PK
15600	53.17	-4.04	V	49.13	73.98	24.85	PK
15600	41.66	-4.04	V	37.62	53.98	16.36	AV
10400	57.91	-2.40	H	55.51	68.20	12.69	PK
15600	52.86	-4.04	H	48.82	73.98	25.16	PK
15600	41.32	-4.04	H	37.28	53.98	16.70	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_ VHT20. Worst case is MCS0 in 802.11ac_ VHT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 1
Operation Mode:	802.11 ac_ VHT20
Transfer MCS Index:	0
Operating Frequency	5240 MHz
Channel No.	48 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10480	58.39	-3.56	V	54.83	68.20	13.37	PK
15720	53.06	-4.05	V	49.01	73.98	24.97	PK
15720	41.53	-4.05	V	37.48	53.98	16.50	AV
10480	58.03	-3.56	H	54.47	68.20	13.73	PK
15720	52.76	-4.05	H	48.71	73.98	25.27	PK
15720	41.21	-4.05	H	37.16	53.98	16.82	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_ VHT20. Worst case is MCS0 in 802.11ac_ VHT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 1
Operation Mode:	802.11n_HT40
Transfer MCS Index:	0
Operating Frequency	5190 MHz
Channel No.	38 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10380	55.78	-2.40	V	53.38	68.20	14.82	PK
15570	54.12	-2.80	V	51.32	73.98	22.66	PK
15570	41.65	-2.80	V	38.85	53.98	15.13	AV
10380	55.50	-2.40	H	53.10	68.20	15.10	PK
15570	53.98	-2.80	H	51.18	73.98	22.80	PK
15570	41.44	-2.80	H	38.64	53.98	15.34	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_HT40. Worst case is MCS0 in 802.11n_HT40.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 1
Operation Mode:	802.11n_ HT40
Transfer MCS Index:	0
Operating Frequency	5230 MHz
Channel No.	46 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10460	54.15	-2.40	V	51.75	68.20	16.45	PK
15690	52.29	-4.04	V	48.25	73.98	25.73	PK
15690	39.56	-4.04	V	35.52	53.98	18.46	AV
10460	53.87	-2.40	H	51.47	68.20	16.73	PK
15690	52.00	-4.04	H	47.96	73.98	26.02	PK
15690	39.41	-4.04	H	35.37	53.98	18.61	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_ HT40. Worst case is MCS0 in 802.11n_ HT40.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 1
Operation Mode:	802.11ac_VHT40
Transfer MCS Index:	0
Operating Frequency	5190 MHz
Channel No.	38 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10380	56.67	-2.40	V	54.27	68.20	13.93	PK
15570	53.05	-2.80	V	50.25	73.98	23.73	PK
15570	40.27	-2.80	V	37.47	53.98	16.51	AV
10380	56.28	-2.40	H	53.88	68.20	14.32	PK
15570	52.71	-2.80	H	49.91	73.98	24.07	PK
15570	40.02	-2.80	H	37.22	53.98	16.76	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_VHT40. Worst case is MCS0 in 802.11ac_VHT40.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 1
Operation Mode:	802.11ac_ VHT40
Transfer MCS Index:	0
Operating Frequency	5230 MHz
Channel No.	46 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10460	55.01	-2.40	V	52.61	68.20	15.59	PK
15690	54.46	-4.04	V	50.42	73.98	23.56	PK
15690	41.31	-4.04	V	37.27	53.98	16.71	AV
10460	54.66	-2.40	H	52.26	68.20	15.94	PK
15690	54.09	-4.04	H	50.05	73.98	23.93	PK
15690	41.02	-4.04	H	36.98	53.98	17.00	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_ VHT40. Worst case is MCS0 in 802.11ac_ VHT40.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 1
Operation Mode:	802.11ac_VHT80
Transfer MCS Index:	0
Operating Frequency	5210 MHz
Channel No.	42 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10420	54.84	-2.40	V	52.44	68.20	15.76	PK
15630	52.27	-4.04	V	48.23	73.98	25.75	PK
15630	39.59	-4.04	V	35.55	53.98	18.43	AV
10420	54.39	-2.40	H	51.99	68.20	16.21	PK
15630	52.17	-4.04	H	48.13	73.98	25.85	PK
15630	39.41	-4.04	H	35.37	53.98	18.61	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_VHT80. Worst case is MCS0 in 802.11ac_VHT80.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 3
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5745MHz
Channel No.	149 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11490	58.67	-2.31	V	56.36	73.98	17.62	PK
11490	47.66	-2.31	V	45.35	53.98	8.63	AV
17235	52.68	2.26	V	54.94	68.20	13.26	PK
11490	58.12	-2.31	H	55.81	73.98	18.17	PK
11490	47.09	-2.31	H	44.78	53.98	9.20	AV
17235	52.44	2.26	H	54.70	68.20	13.50	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 3
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5785 MHz
Channel No.	157 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11570	60.08	-2.57	V	57.51	73.98	16.47	PK
11570	48.30	-2.57	V	45.73	53.98	8.25	AV
17355	51.82	1.68	V	53.50	68.20	14.70	PK
11570	59.77	-2.57	H	57.20	73.98	16.78	PK
11570	48.00	-2.57	H	45.43	53.98	8.55	AV
17355	51.62	1.68	H	53.30	68.20	14.90	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 3
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5825 MHz
Channel No.	165 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11650	62.94	-2.83	V	60.11	73.98	13.87	PK
11650	49.57	-2.83	V	46.74	53.98	7.24	AV
17475	51.31	4.48	V	55.79	68.20	12.41	PK
11650	62.44	-2.83	H	59.61	73.98	14.37	PK
11650	49.11	-2.83	H	46.28	53.98	7.70	AV
17475	51.09	4.48	H	55.57	68.20	12.63	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 3
Operation Mode:	802.11 n_HT20
Transfer MCS Index:	0
Operating Frequency	5745 MHz
Channel No.	149 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11490	58.36	-2.31	V	56.05	73.98	17.93	PK
11490	47.00	-2.31	V	44.69	53.98	9.29	AV
17235	51.46	2.26	V	53.72	68.20	14.48	PK
11490	58.16	-2.31	H	55.85	73.98	18.13	PK
11490	46.73	-2.31	H	44.42	53.98	9.56	AV
17235	51.24	2.26	H	53.50	68.20	14.70	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_HT20. Worst case is MCS0 in 802.11n_HT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 3
Operation Mode:	802.11 n_ HT20
Transfer MCS Index:	0
Operating Frequency	5785 MHz
Channel No.	157 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11570	60.15	-2.57	V	57.58	73.98	16.40	PK
11570	47.84	-2.57	V	45.27	53.98	8.71	AV
17355	51.32	1.68	V	53.00	68.20	15.20	PK
11570	59.58	-2.57	H	57.01	73.98	16.97	PK
11570	47.39	-2.57	H	44.82	53.98	9.16	AV
17355	51.01	1.68	H	52.69	68.20	15.51	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_ HT20. Worst case is MCS0 in 802.11n_ HT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 3
Operation Mode:	802.11 n_ HT20
Transfer MCS Index:	0
Operating Frequency	5825 MHz
Channel No.	165 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11650	62.82	-2.83	V	59.99	73.98	13.99	PK
11650	49.75	-2.83	V	46.92	53.98	7.06	AV
17475	50.76	4.48	V	55.24	68.20	12.96	PK
11650	62.54	-2.83	H	59.71	73.98	14.27	PK
11650	49.60	-2.83	H	46.77	53.98	7.21	AV
17475	50.51	4.48	H	54.99	68.20	13.21	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_ HT20. Worst case is MCS0 in 802.11n_ HT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 3
Operation Mode:	802.11 ac_VHT20
Transfer MCS Index:	0
Operating Frequency	5745 MHz
Channel No.	149 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11490	58.98	-2.31	V	56.67	73.98	17.31	PK
11490	47.05	-2.31	V	44.74	53.98	9.24	AV
17235	52.14	2.26	V	54.40	68.20	13.80	PK
11490	58.60	-2.31	H	56.29	73.98	17.69	PK
11490	46.71	-2.31	H	44.40	53.98	9.58	AV
17235	51.83	2.26	H	54.09	68.20	14.11	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_VHT20. Worst case is MCS0 in 802.11ac_VHT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 3
Operation Mode:	802.11 ac_ VHT20
Transfer MCS Index:	0
Operating Frequency	5785 MHz
Channel No.	157 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11570	60.40	-2.57	V	57.83	73.98	16.15	PK
11570	47.82	-2.57	V	45.25	53.98	8.73	AV
17355	51.01	1.68	V	52.69	68.20	15.51	PK
11570	60.01	-2.57	H	57.44	73.98	16.54	PK
11570	47.47	-2.57	H	44.90	53.98	9.08	AV
17355	50.78	1.68	H	52.46	68.20	15.74	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_ VHT20. Worst case is MCS0 in 802.11ac_ VHT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 3
Operation Mode:	802.11 ac_ VHT20
Transfer MCS Index:	0
Operating Frequency	5825 MHz
Channel No.	165 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11650	62.01	-2.83	V	59.18	73.98	14.80	PK
11650	48.97	-2.83	V	46.14	53.98	7.84	AV
17475	51.18	4.48	V	55.66	68.20	12.54	PK
11650	61.49	-2.83	H	58.66	73.98	15.32	PK
11650	48.80	-2.83	H	45.97	53.98	8.01	AV
17475	50.99	4.48	H	55.47	68.20	12.73	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_ VHT20. Worst case is MCS0 in 802.11ac_ VHT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII3
Operation Mode:	802.11n_ HT40
Transfer MCS Index:	0
Operating Frequency	5755 MHz
Channel No.	151 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11510	54.92	-2.31	V	52.61	73.98	21.37	PK
11510	43.23	-2.31	V	40.92	53.98	13.06	AV
17265	51.76	1.64	V	53.40	68.20	14.80	PK
11510	54.64	-2.31	H	52.33	73.98	21.65	PK
11510	43.01	-2.31	H	40.70	53.98	13.28	AV
17265	51.65	1.64	H	53.29	68.20	14.91	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_ HT40. Worst case is MCS0 in 802.11n_ HT40.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 3
Operation Mode:	802.11n_ HT40
Transfer MCS Index:	0
Operating Frequency	5795 MHz
Channel No.	159 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11590	55.80	-2.57	V	53.23	73.98	20.75	PK
11590	43.82	-2.57	V	41.25	53.98	12.73	AV
17385	50.07	3.54	V	53.61	68.20	14.59	PK
11590	55.55	-2.57	H	52.98	73.98	21.00	PK
11590	43.53	-2.57	H	40.96	53.98	13.02	AV
17385	49.81	3.54	H	53.35	68.20	14.85	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_ HT40. Worst case is MCS0 in 802.11n_ HT40.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 3
Operation Mode:	802.11ac_VHT40
Transfer MCS Index:	0
Operating Frequency	5755 MHz
Channel No.	151 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11510	54.53	-2.31	V	52.22	73.98	21.76	PK
11510	43.36	-2.31	V	41.05	53.98	12.93	AV
17265	52.12	1.64	V	53.76	68.20	14.44	PK
11510	54.12	-2.31	H	51.81	73.98	22.17	PK
11510	43.10	-2.31	H	40.79	53.98	13.19	AV
17265	52.01	1.64	H	53.65	68.20	14.55	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_VHT40. Worst case is MCS0 in 802.11ac_VHT40.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 3
Operation Mode:	802.11ac_ VHT40
Transfer MCS Index:	0
Operating Frequency	5795 MHz
Channel No.	159 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11590	55.70	-2.57	V	53.13	73.98	20.85	PK
11590	44.16	-2.57	V	41.59	53.98	12.39	AV
17385	50.16	3.54	V	53.70	68.20	14.50	PK
11590	55.41	-2.57	H	52.84	73.98	21.14	PK
11590	43.84	-2.57	H	41.27	53.98	12.71	AV
17385	50.02	3.54	H	53.56	68.20	14.64	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_ VHT40. Worst case is MCS0 in 802.11ac_ VHT40.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 3
Operation Mode:	802.11ac_VHT80
Transfer MCS Index:	0
Operating Frequency	5775 MHz
Channel No.	155 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11550	55.62	-2.31	V	53.31	73.98	20.67	PK
11550	44.15	-2.31	V	41.84	53.98	12.14	AV
17325	50.74	1.64	V	52.38	68.20	15.82	PK
11550	55.12	-2.31	H	52.81	73.98	21.17	PK
11550	43.89	-2.31	H	41.58	53.98	12.40	AV
17325	50.60	1.64	H	52.24	68.20	15.96	PK


*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_VHT80. Worst case is MCS0 in 802.11ac_VHT80.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)


RESULT PLOTS(Worst case : X-V)

Radiated Spurious Emissions plot – Average Reading(802.11n_HT20, Ch.165 2nd Harmonic)

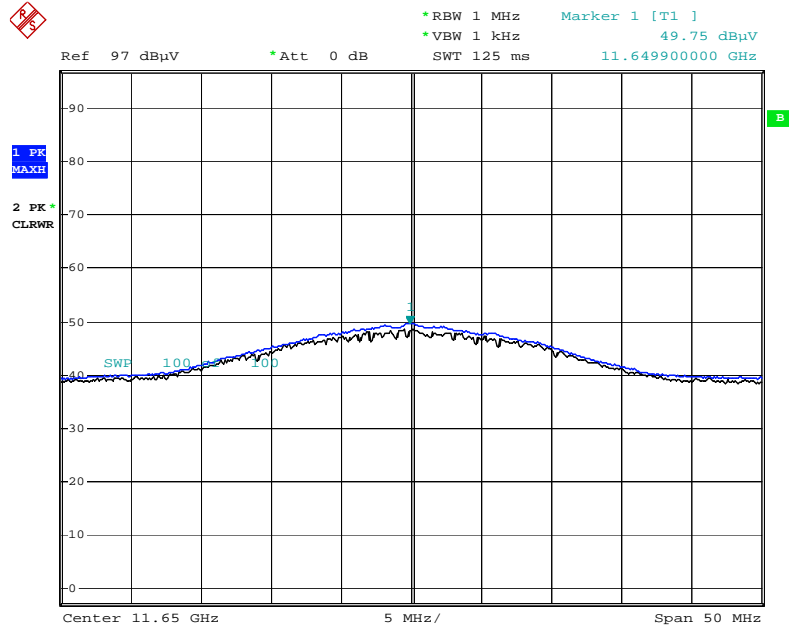


Date: 4.AUG.2017 21:27:03

Radiated Spurious Emissions plot – Peak Reading(802.11n_HT20, Ch.165 2nd Harmonic)

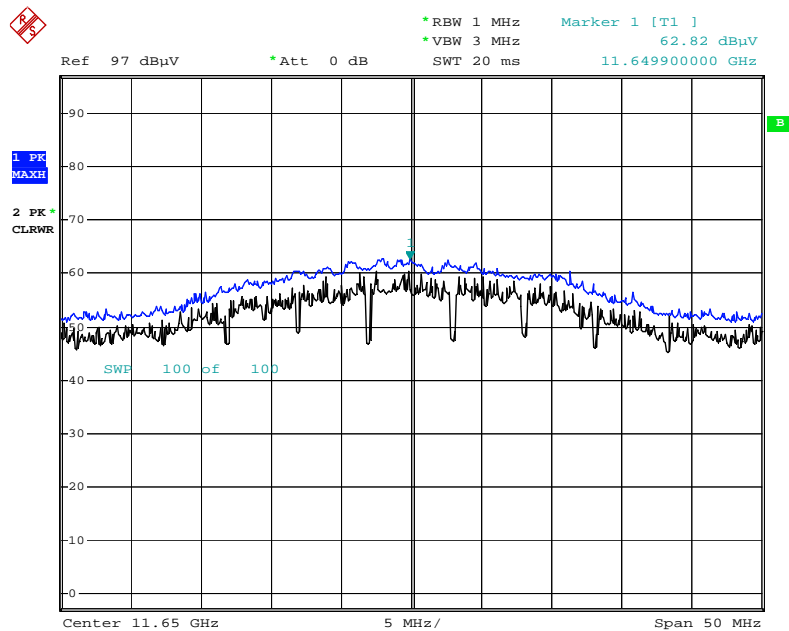


Date: 4.AUG.2017 20:51:26

Radiated Spurious Emissions plot – Average Reading (802.11ac_VHT40, Ch.159 2nd Harmonic)

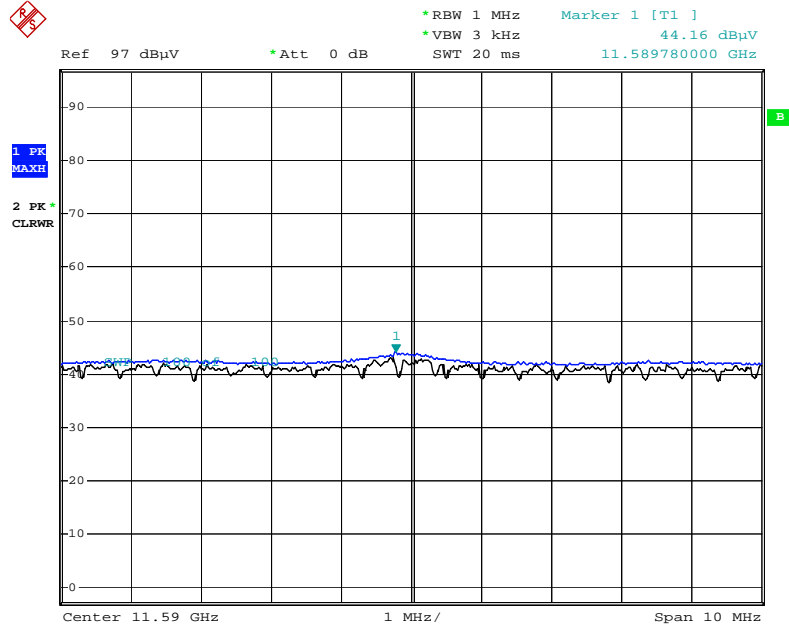


Date: 4.AUG.2017 21:36:53

Radiated Spurious Emissions plot –Peak Reading (802.11ac_VHT40, Ch.159 2nd Harmonic)

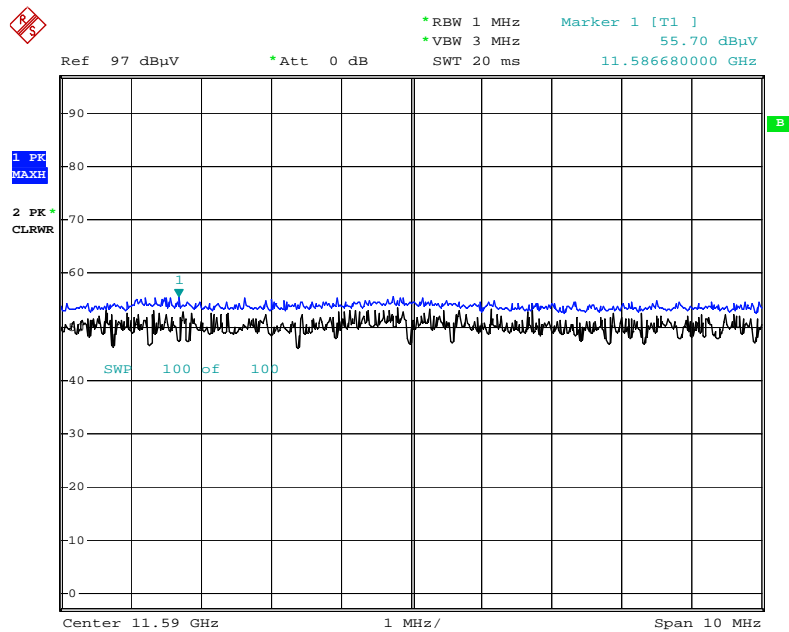


Date: 4.AUG.2017 21:35:58

Radiated Spurious Emissions plot –Average Reading (802.11ac_VHT80, Ch.155 2nd Harmonic)

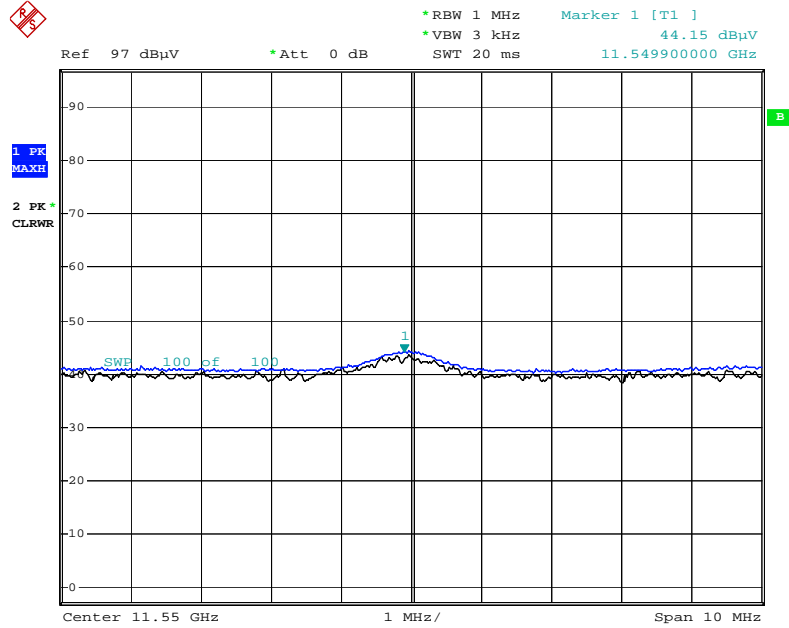

Date: 4.AUG.2017 21:44:55

Radiated Spurious Emissions plot –Peak Reading (802.11ac_VHT80, Ch.155 2nd Harmonic)

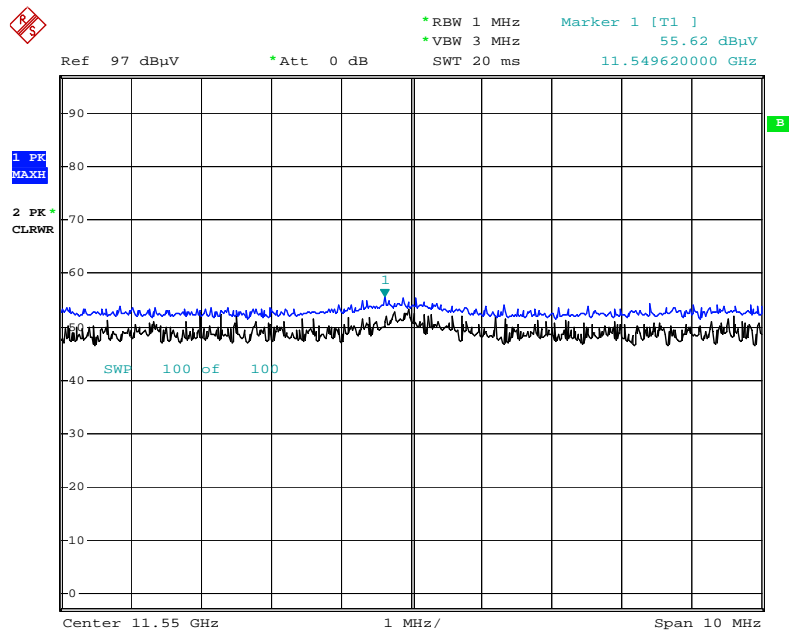

Date: 4.AUG.2017 21:45:34

Note : Only the worst case plots for Radiated Spurious Emissions.

9.6.2 RADIATED RESTRICTED BAND EDGE MEASUREMENTS

Test Requirements and limit, §15.247(d) §15.205, §15.209

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a) (See section 15.205(c)).

Band :	UNII 1
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	66.24	2.63	H	68.87	73.98	5.11	PK
5150	42.78	2.63	H	45.41	53.98	8.57	AV
5150	66.18	2.63	V	68.81	73.98	5.17	PK
5150	42.61	2.63	V	45.24	53.98	8.74	AV

Band :	UNII 1
Operation Mode:	802.11 n_HT20
Transfer MCS Index:	0
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	66.29	2.63	H	68.92	73.98	5.06	PK
5150	42.70	2.63	H	45.33	53.98	8.65	AV
5150	66.12	2.63	V	68.75	73.98	5.23	PK
5150	42.42	2.63	V	45.05	53.98	8.93	AV

Band :	UNII 1
Operation Mode:	802.11 ac_VHT20
Transfer MCS Index:	0
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	66.47	2.63	H	69.10	73.98	4.88	PK
5150	42.76	2.63	H	45.39	53.98	8.59	AV
5150	66.20	2.63	V	68.83	73.98	5.15	PK
5150	42.53	2.63	V	45.16	53.98	8.82	AV

Band : UNII 1

Operation Mode: 802.11 n_HT40

Transfer MCS Index: 0

Operating Frequency 5190 MHz

Channel No. 38 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	66.05	2.63	H	68.68	73.98	5.30	PK
5150	46.84	2.63	H	49.47	53.98	4.51	AV
5150	65.92	2.63	V	68.55	73.98	5.43	PK
5150	46.63	2.63	V	49.26	53.98	4.72	AV

Band : UNII 1

Operation Mode: 802.11 ac_VHT40

Transfer MCS Index: 0

Operating Frequency 5190 MHz

Channel No. 38 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	66.36	2.81	H	69.17	73.98	4.81	PK
5150	46.96	2.81	H	49.77	53.98	4.21	AV
5150	65.92	2.81	V	68.73	73.98	5.25	PK
5150	46.82	2.81	V	49.63	53.98	4.35	AV

Band :	UNII 1
Operation Mode:	802.11 ac_VHT80
Transfer MCS Index:	0
Operating Frequency	5210 MHz
Channel No.	42 Ch


Frequency [MHz]	Reading [dBuV]	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	60.29	2.63	H	62.92	73.98	11.06	PK
5150	47.76	2.63	H	50.39	53.98	3.59	AV
5150	63.28	2.81	V	66.09	73.98	7.89	PK
5150	46.59	2.81	V	49.4	53.98	4.58	AV

Notes:

1. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + ATT + D.F.
2. We have done all data rate in 802.11a/n/ac mode test. . Worst case of EUT is lowest data rate in 802.11a/n/ac.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. “*” is radiated band edge test frequency.(not restricted band emissions)
5. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Distance Factor
6. The worst limit for UNII 3 according to 15.407(4)(i) is -27 dBm(68.2 dBuV/m).
The band edge results at 5850 MHz comply to the worst limit.


■ **RESULT PLOTS(Worst case : X-H)**

Radiated Restricted Band Edges plot –Average Reading (802.11ac_VHT20, Ch.36)

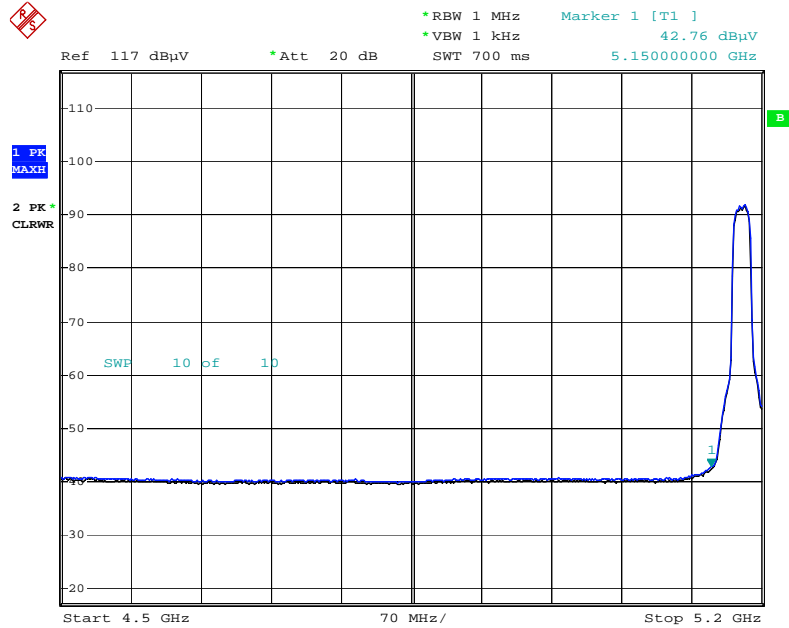

Date: 4.AUG.2017 15:55:29


Radiated Restricted Band Edges plot – Peak Reading (802.11ac_VHT20, Ch.36)

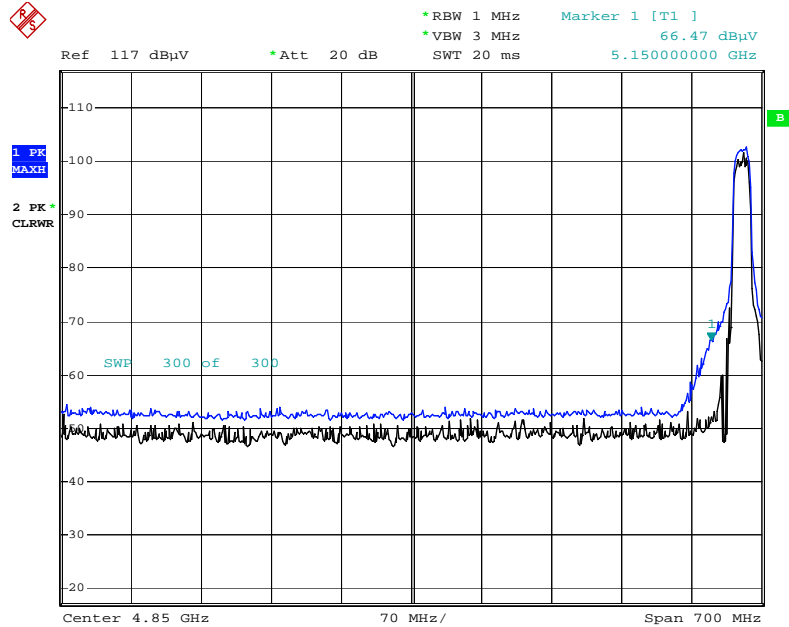

Date: 4.AUG.2017 15:58:16


Note : Only the worst case plots for Radiated Restricted Band Edges.

Radiated Restricted Band Edges plot –Average Reading (802.11ac_VHT40, Ch.38)

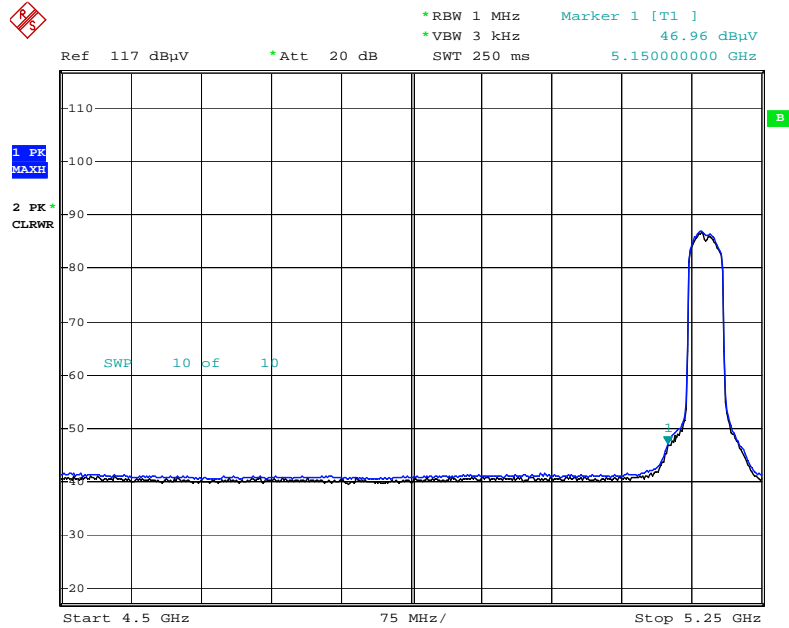

Date: 4.AUG.2017 16:23:10


Radiated Restricted Band Edges plot – Peak Reading (802.11ac_VHT40, Ch.38)

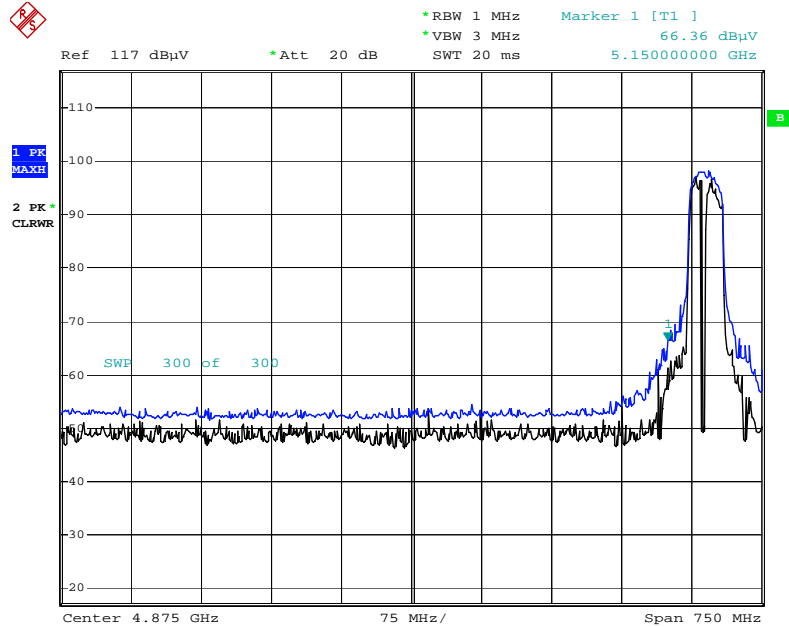

Date: 4.AUG.2017 16:26:46


Note : Only the worst case plots for Radiated Restricted Band Edges.

Radiated Restricted Band Edges plot –Average Reading (802.11ac_VHT80, Ch.42)

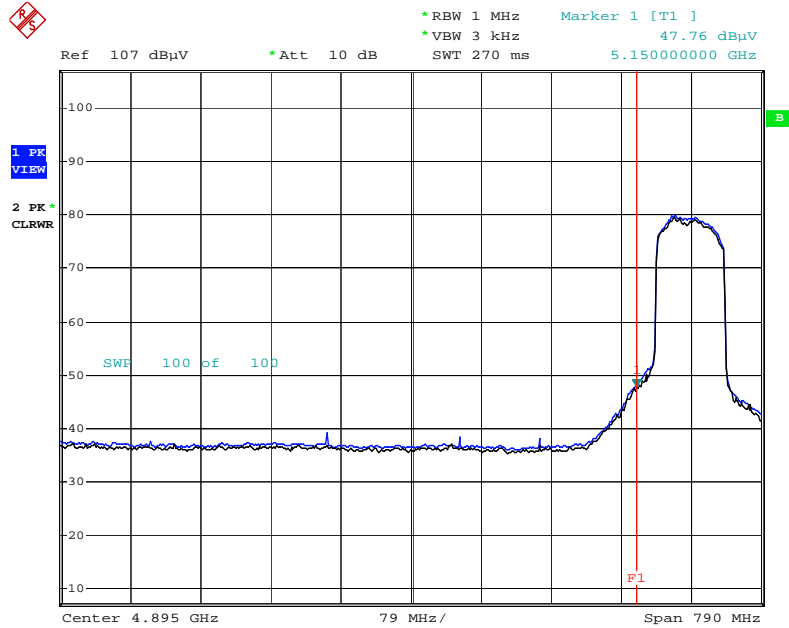

Date: 13.SEP.2017 14:27:57

Radiated Restricted Band Edges plot – Peak Reading (802.11ac_VHT80, Ch.42)

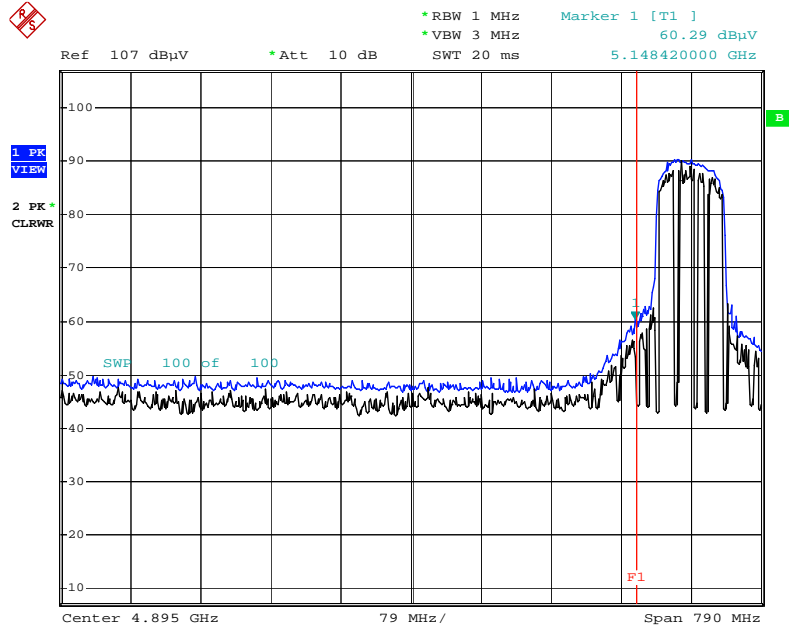


Date: 13.SEP.2017 14:28:54


Note : Only the worst case plots for Radiated Restricted Band Edges.

■ RESULT PLOTS (UNII 3) – Worst case : X-V

Radiated Restricted Band Edges plot – Peak Reading (802.11a)

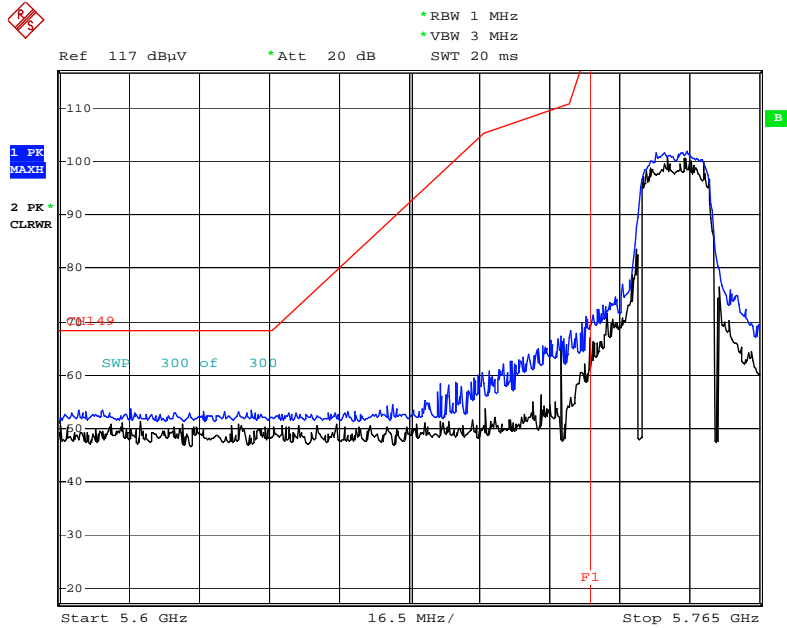


Date: 4.AUG.2017 17:04:29

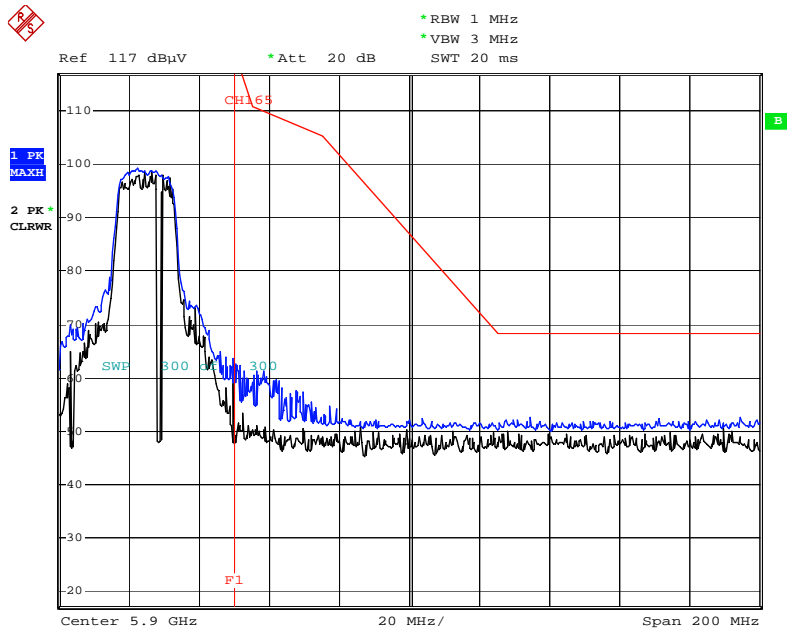


Date: 4.AUG.2017 17:02:01

Radiated Restricted Band Edges plot – Peak Reading (802.11n_HT20)

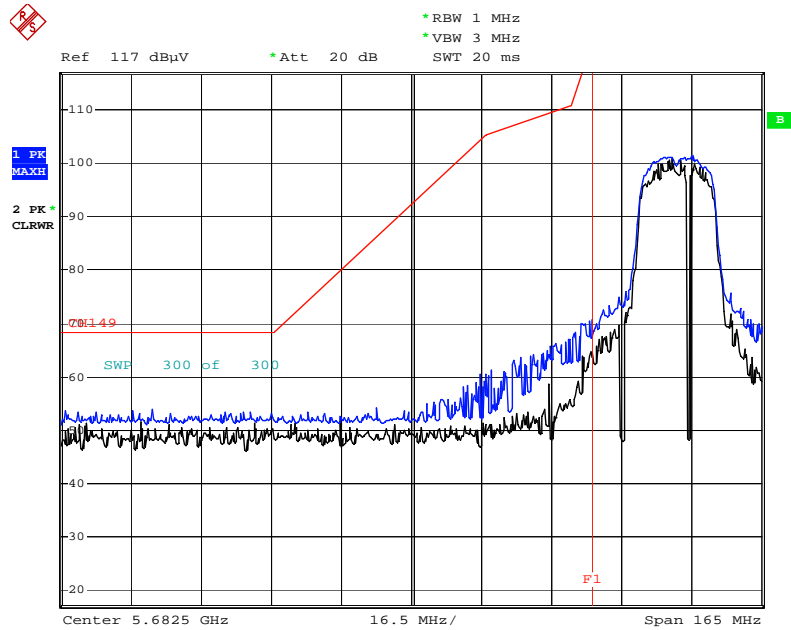


Date: 4.AUG.2017 17:05:30

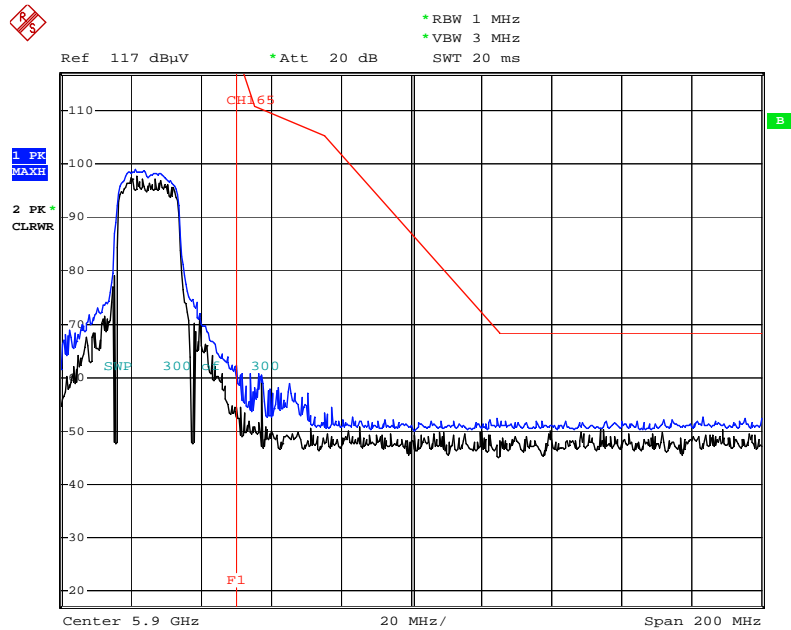


Date: 4.AUG.2017 17:00:36

Radiated Restricted Band Edges plot – Peak Reading (802.11ac_VHT20)

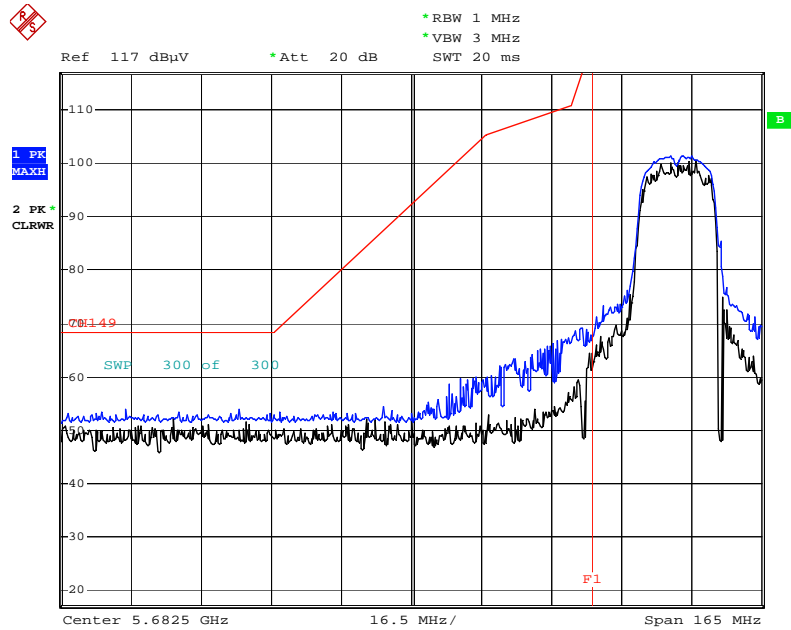


Date: 4.AUG.2017 17:06:54

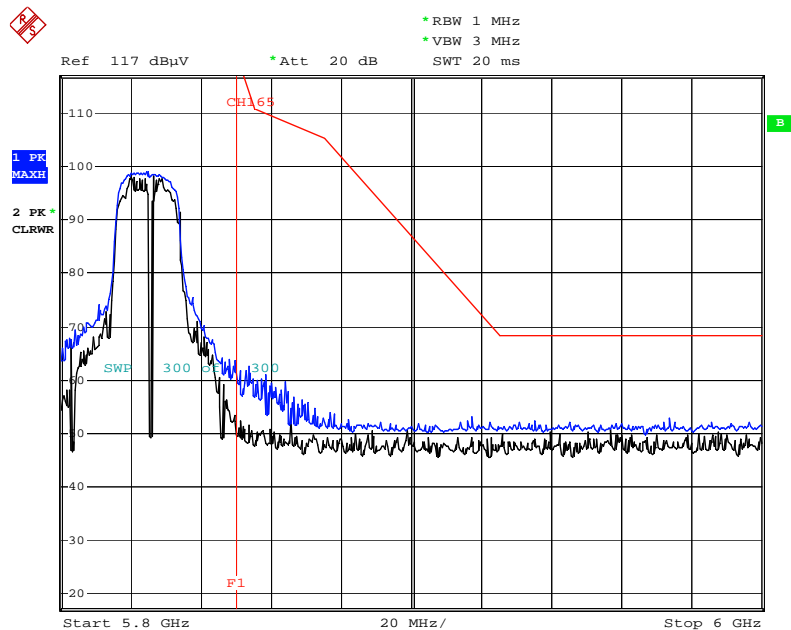


Date: 4.AUG.2017 16:59:20

Radiated Restricted Band Edges plot – Peak Reading (802.11n_HT40)

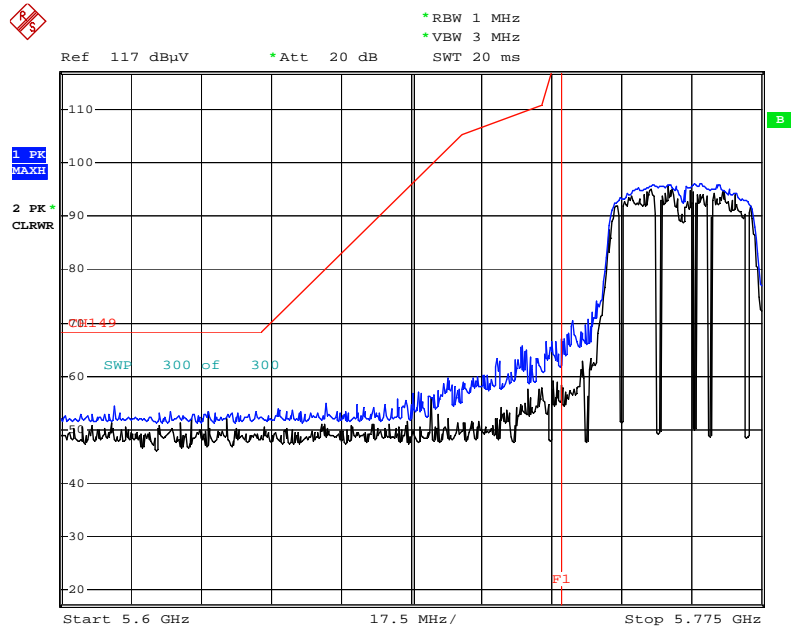


Date: 4.AUG.2017 17:08:34

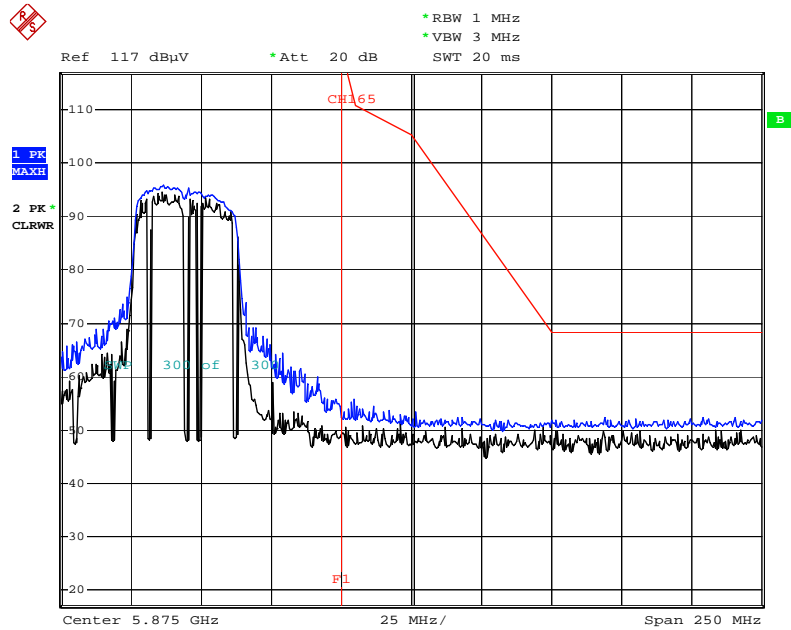


Date: 4.AUG.2017 16:57:58

Radiated Restricted Band Edges plot – Peak Reading (802.11ac_VHT40)

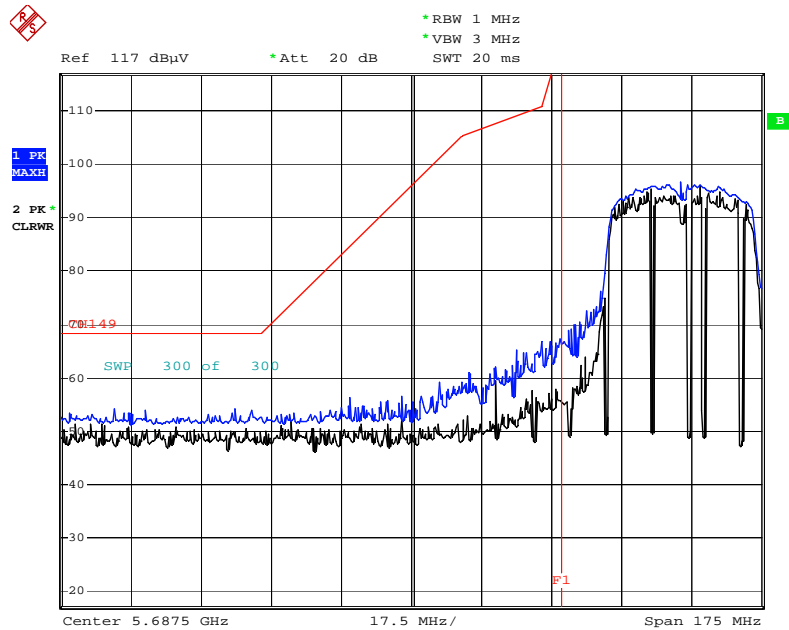


Date: 4.AUG.2017 17:09:52

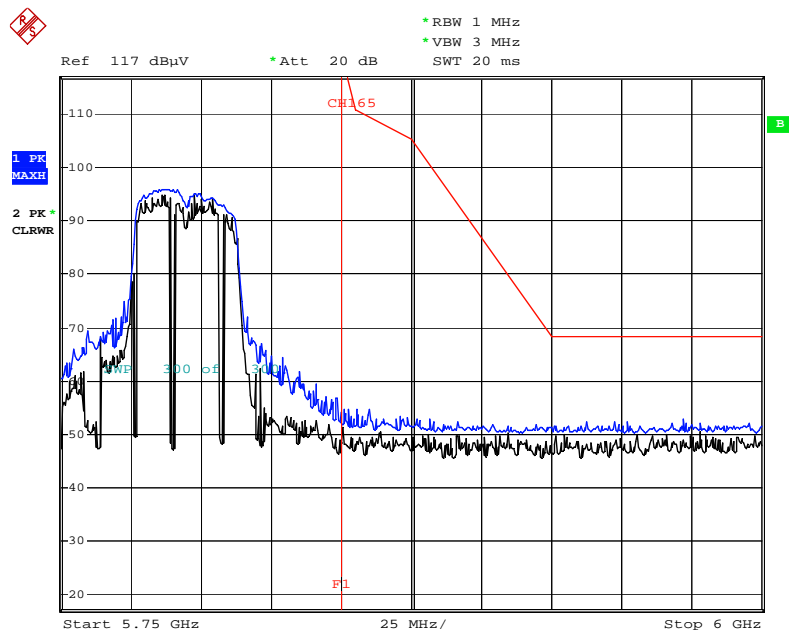


Date: 4.AUG.2017 16:56:05

Radiated Restricted Band Edges plot – Peak Reading (802.11ac_VHT80)

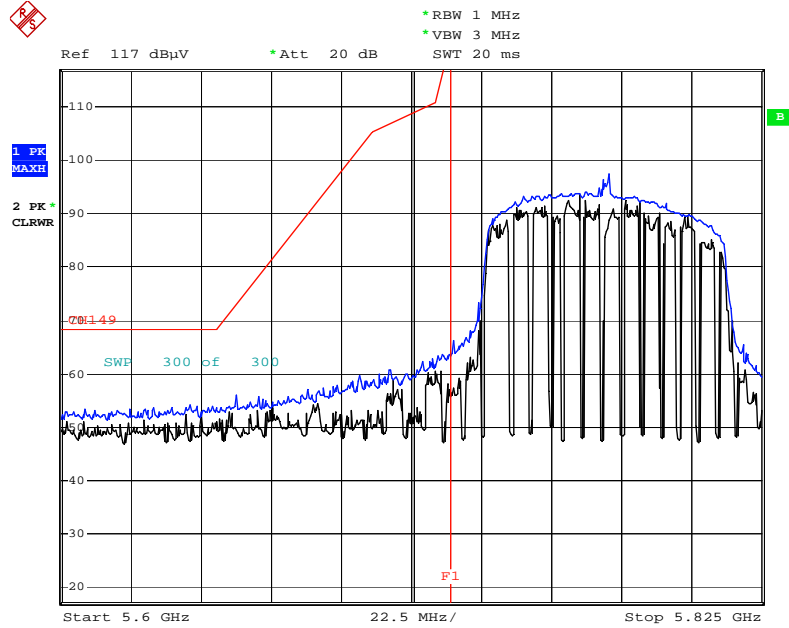

Date: 4.AUG.2017 16:52:27

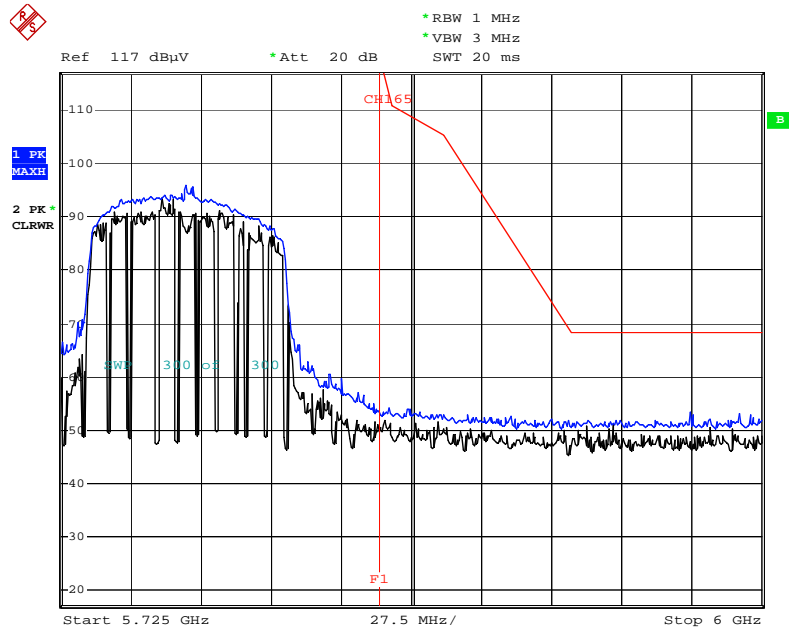

Date: 4.AUG.2017 16:54:20

9.7 POWERLINE CONDUCTED EMISSIONS

Test Requirements and limit, §15.207

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference groundplane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

Note : We don't perform powerline conducted emission test. Because this EUT is used with vehicle.

10. LIST OF TEST EQUIPMENT

10.1 LIST OF TEST EQUIPMENT(Conducted Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	12/23/2016	Annual	100073
Rohde & Schwarz	ESCI / Test Receiver	12/23/2016	Annual	100584
Agilent	N9020A / Signal Analyzer	06/13/2017	Annual	MY51110085
Agilent	N9030A / Signal Analyzer	11/30/2016	Annual	MY49431210
Agilent	N1911A / Power Meter	04/17/2017	Annual	MY45100523
Agilent	N1921A / Power Sensor	04/17/2017	Annual	MY52260025
Agilent	87300B / Directional Coupler	11/23/2016	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	06/12/2017	Annual	05001
Hewlett Packard	E3632A / DC Power Supply	06/30/2017	Annual	KR75303960
Agilent	8493C / Attenuator(10 dB)	07/10/2017	Annual	07560
Rohde & Schwarz	EMC32 / Software	-	-	-

10.2 LIST OF TEST EQUIPMENT(Radiated Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Audix	AM4000 / Antenna Position Tower	N/A	N/A	N/A
Audix	Turn Table	N/A	N/A	N/A
Audix	EM1000 / Controller	N/A	N/A	060520
Rohde & Schwarz	Loop Antenna	04/19/2017	Biennial	1513-175
Schwarzbeck	VULB 9168 / Hybrid Antenna	04/06/2017	Biennial	760
Schwarzbeck	BBHA 9120D / Horn Antenna	08/25/2016	Biennial	9120D-1300
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	04/25/2017	Biennial	BBHA9170342
Rohde & Schwarz	FSP(9 kHz ~ 30 GHz) / Spectrum Analyzer	09/06/2017	Annual	100688
Rohde & Schwarz	FSP(9 kHz ~ 40 GHz) / Spectrum Analyzer	07/27/2017	Annual	100843
Wainwright Instruments	WHK3.0/18G-10EF / High Pass Filter	06/12/2017	Annual	8
Wainwright Instruments	WHFX7.0/18G-8SS / High Pass Filter	05/15/2017	Annual	29
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	06/30/2017	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	01/24/2017	Annual	2
Api tech.	18B-03 / Attenuator (3 dB)	06/12/2017	Annual	1
Agilent	8493C-10 / Attenuator(10 dB)	07/19/2017	Annual	08285
CERNEX	CBLU1183540 / Power Amplifier	07/11/2017	Annual	22964
CERNEX	CBL06185030 / Power Amplifier	07/11/2017	Annual	22965
CERNEX	CBL18265035 / Power Amplifier	01/23/2017	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	06/30/2017	Annual	25956