

Application for FCC Certificate
On Behalf of
LG Electronics U.S.A Inc.

LCD Monitor

Model No.: L204WTM, L204WT

Serial No.: 604NTHM5F265

FCC ID : BEJL204WTM

Prepared For : LG Electronics U.S.A Inc.
2000 Millbrook Dr.Lincolnshire,
IL 60069 United States

Prepared By : Audix Technology (Shanghai) Co., Ltd.
3F 34Bldg 680 Guiping Rd,
Caohejing Hi-Tech Park,
Shanghai, China 200233

Tel: +86-21-64955500
Fax: +86-21-64955491

Report No. : ACI-F06019
Date of Test : May 08-12, 2006
Date of Report : May 17, 2006

TABLE OF CONTENTS

	Page
1 SUMMARY OF STANDARDS AND RESULTS	4
1.1 Description of Standards and Results.....	4
2 GENERAL INFORMATION.....	5
2.1 Description of Equipment Under Test.....	5
2.2 Supported Simulators	5
2.3 Description of Test Facility	6
2.4 Measurement Uncertainty	7
3 CONDUCTED EMISSION TEST	8
3.1 Test Equipment.....	8
3.2 Block Diagram of Test Setup	8
3.3 Conducted Emission Limit.....	9
3.4 Test Configuration.....	9
3.5 Operating Condition of EUT	9
3.6 Test Procedures	10
3.7 Test Results	10
4 RADIATED EMISSION TEST.....	17
4.1 Test Equipment.....	17
4.2 Block Diagram of Test Setup	17
4.3 Radiated Emission Limit.....	18
4.4 Test Configuration.....	18
4.5 Operating Condition of EUT	19
4.6 Test Procedures	19
4.7 Test Results	20
5 DEVIATION TO TEST SPECIFICATIONS	29
6 DEBUG DESCRIPTION	30

TEST REPORT FOR FCC CERTIFICATE

Applicant : LG Electronics U.S.A Inc.
Manufacturer : Nanjing LG-Tontru Color Display System Co., Ltd.
EUT Description : LCD Monitor
(A) Model No. : L204WTM, L204WT
(B) Serial No. : 604NTHM5F265
(C) Power Supply : 120V/60Hz

Test Procedure Used:

*FCC RULES AND REGULATIONS PART 15 SUBPART B CLASS B FEBRUARY 2006
AND ANSI C63.4-2003*

The device described above is tested by Audix Technology (Shanghai) Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart B (Class B) and ICES-003, Issue 4 February 2004 (CISPR 22:2002) limits both radiated and conducted emissions.

The test results are contained in this test report and Audix Technology (Shanghai) Co., Ltd. is assumed full responsibility for the accuracy and completeness of these measurements. This report shows that the EUT (M/N: L204WTM, L204WT; S/N: 604NTHM5F265) which was tested in 3m anechoic chamber on May 08-12, 2006 is technically compliance with the FCC official limits also.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Audix Technology (Shanghai) Co., Ltd.

This report contains data that are not covered by the NVLAP accreditation.

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Date of Test :

May 08-12, 2006


Prepared By:

Yolanda Liu / Assistant

Reviewer:

 For and on behalf of
Audix Technology (Shanghai) Co., Ltd.

Approved Signatory:


Authorized Representative Manager

1 SUMMARY OF STANDARDS AND RESULTS

1.1 Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Description / Test Item	Test Standard	Results	Meets Limit
EMISSION			
Conducted Disturbance At main terminal	FCC RULES AND REGULATIONS PART 15 SUBPART B FEBRUARY 2006 AND ANSI C63.4-2003	Pass	15.107 Class B
Radiated Disturbance	FCC RULES AND REGULATIONS PART 15 SUBPART B FEBRUARY 2006 AND ANSI C63.4-2003	Pass	15.109 Class B

2 GENERAL INFORMATION

2.1 Description of Equipment Under Test

Description	:	LCD Monitor
Type of EUT	:	☒ Production ☐ Pre-product ☐ Pro-type
Model No.	:	L204WTM, L204WT
Serial No.	:	604NTHM5F265
Note	:	The above two models are one series, L204WTM has speaker while L204WT hasn't. The others are all the same. The data of L204WTM are recorded in the report.
Applicant	:	LG Electronics U.S.A Inc. 2000 Millbrook Dr.Lincolnshire, IL 60069 United States
Manufacturer	:	Nanjing LG-Tontru Color Display System Co., Ltd. No.346, Yao Xin Road, Nanjing, China
LCD Panel	:	Manufacturer: CHUNGHWA CLAA201A03Q M/N : HDSD190MGW1
D-Sub Cable	:	Shielded, Detachable, 1.8m, with two cores
DVI Cable	:	Shielded, Detachable, 1.8m with two cores

Remark:

The EUT is a LCD Monitor which input/output ports as follows:

Back View:

- (1) One Power Port
- (2) One D-Sub Input Port
- (3) One DVI Input Port
- (4) One Earphone Port

2.2 Supported Simulators

2.2.1 PC

Manufacturer	:	HP
Model Number	:	dx6120MT
CPU	:	CNG53004J2
Power Cable	:	Unshielded, detachable ,1.8m
Certificate	:	FCC DoC, VCCI, CE/EMC VCCI, C-Tick, CE/EMC MIC, C-Tick(N119)

2.2.2 Keyboard

Manufacturer : Logitech
Model Number : KB-0133
Serial Number : 323686-AA1
Data Cable : Unshielded, Undetachable, 1.9m
Certificate : FCC DoC, VCCI, CE/EMC
MIC, C-Tick(N119)

2.2.3 Mouse

Manufacturer : Logitech
Model Number : M-S69
Serial Number : 323614-001
Data Cable : Unshielded ,Undetachable, 1.85m.
Certificate : FCC ID:JNZ21-1443, VCCI, CE-EMC,
MIC, C-Tick(N231)

2.2.4 Printer

Manufacturer : HP
Model Number : C3990A
Serial Number : JPZX020487
Data Cable : Unshielded, Detachable, 1.5m
Power Cord : Unshielded, Detachable, 1.8m
Certificate : GS, CE/EMC, C-Tick, FCC DoC

2.2.5 Modem

Manufacturer : Aceex
Model Number : 1414
Serial Number : 980013576
Data Cable : Unshielded, Detachable, 1.8m
FCC ID : IFAXDM1414

2.2.6 Earphone

2.3 Description of Test Facility

Site Description : Sept. 17, 1998 file on
August 15, 2003 Renewed
(Semi-Anechoic Chamber) Federal Communications Commission
FCC Engineering Laboratory
7435 Oakland Mills Road
Columbia, MD 21046, USA
Name of Firm : Audix Technology (Shanghai) Co., Ltd.
Site Location : 3F 34Bldg 680 Guiping Rd,
Caohejing Hi-Tech Park,
Shanghai, China 200233.
FCC registration Number : 91789
Accredited by NVLAP, Lab Code : 200371-0

2.4 Measurement Uncertainty

Conducted Emission Expanded Uncertainty: $U = 1.84\text{dB}$

Radiated Emission Expanded Uncertainty : $U = 2.96\text{dB}$

3 CONDUCTED EMISSION TEST


3.1 Test Equipment

The following test equipment are used during the conducted emission test in a shielded room:


Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Test Receiver	R&S	ESHS10	844077/020	Feb 17, 2006	Feb 17, 2007
2.	Line Impedance Stabilization Network (LISN#1)	Kyoritsu	KNW-407	8-1280-4	Apr 12, 2006	Apr 12, 2007
3.	Line Impedance Stabilization Network (LISN#2)	Kyoritsu	KNW-407	8-1280-5	Apr 13, 2006	Apr 13, 2007
4.	50Ω Coaxial Switch	ANRITSU	MP59B	6200426389	Mar 18, 2006	Sep 18, 2006
5.	50Ω Terminator	Anritsu	BNC	001	Apr 11, 2006	Apr 11, 2007
6.	Software	Audix	E3	SET00200 9804M592	--	--

3.2 Block Diagram of Test Setup

3.2.1 EUT & Supported Simulators

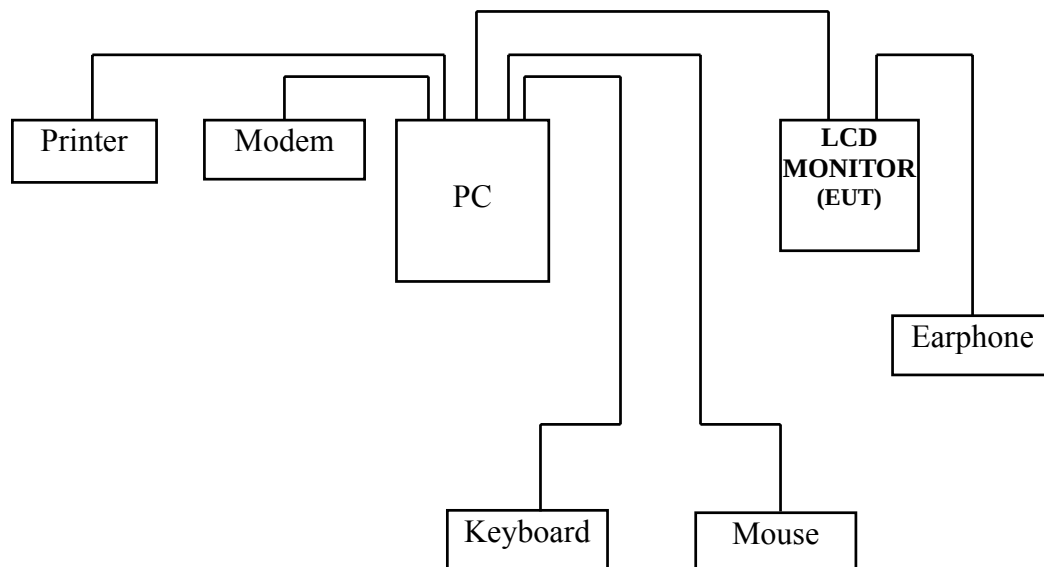

3.2.2 Conducted Disturbance Test Setup

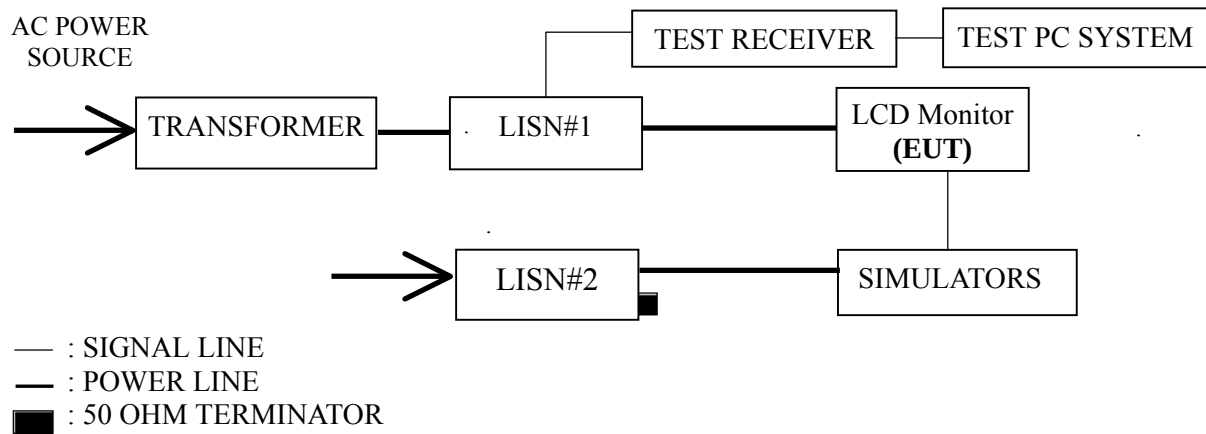

3.3 Conducted Emission Limit

Frequency Range (MHz)	Limits dB (μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66~56	56~46
0.5 ~ 5	56	46
5 ~ 30	60	50

NOTE 1 – The lower limit shall apply at the transition frequencies.
 NOTE 2 – The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz~0.50 MHz
 NOTE 3 – If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with the average detector is unnecessary.

3.4 Test Configuration

The EUT (listed in Sec.2.1) and the simulators (listed in Sec 2.2) were installed as shown on Sec.3.2 to meet FCC requirement and operating in a manner that tends to maximize its emission level in a normal application.

3.5 Operating Condition of EUT

- 3.5.1 Setup the EUT and simulators as shown in Sec. 3.2
- 3.5.2 Turn on the power of all equipment and the EUT.
- 3.5.3 Set the contrast control to maximum.
- 3.5.4 Set the brightness control to maximum or at raster extinction if raster extinction occurs at less than maximum brightness.
- 3.5.5 For color monitors, use white letters on a black background to represent all color.
- 3.5.6 Select the worse case of positive or negative video if both alternatives

are available.

- 3.5.7 Set character size and number of characters per line so that typically the greatest number of characters per screen is displayed.
- 3.5.8 For monitors with graphics capabilities, a pattern consisting of all scrolling Hs should be displayed. For monitors with text only capability, a pattern consisting of random text shall be displayed. If neither of the above is applied, use a typical display.
- 3.5.9 Set the EUT on the test modes in turn, and then test it.
- 3.5.10 The test modes are as follows:

VGA 800*600@60Hz	VGA 1024*768@75Hz	VGA 1280*1024@75Hz
DVI 800*600@60Hz	DVI 1024*768@75Hz	DVI 1280*1024@75Hz

3.6 Test Procedures

The EUT was connected to the power mains through a Line Impedance Stabilization Network (LISN). This provided a 50 ohm coupling impedance for the measuring equipment.

Both sides of AC line (VA & VB) were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed or manipulated according to ANSI C63.4:2003 during conducted emission test.

The bandwidth of Test Receiver ESHS10 was set at 10 kHz.

The frequency range from 150 kHz to 30 MHz was checked.

The test modes were done on conducted disturbance test and all the test results are listed in Sec. 3.7.

3.7 Test Results

< **PASS** >

The frequency and amplitude of the highest conducted emission relative to the limit is reported. All emissions not reported below are too low against the prescribed limits.

NOTE 1 - Factor = Cable Loss + LISN Factor.

NOTE 2 - Emission Level = Meter Reading + Factor.

NOTE 3 - “QP” means “Quasi-Peak” values, “AV” means “Average” values.

NOTE 4 - The worst case is for VGA 1280*1024@60Hz mode. The worst emission is detected at 3.68 MHz with corrected signal level of 42.44 (μV) (limit is 56.00 dB (μV)), when the VB of the EUT is connected to LISN.

EUT : LCD Monitor Temperature : 22°C

Model No. : L204WTM Humidity : 50%

Serial No. : 604NTHM5F265 Date of Test : May 08, 2006

Test Mode : VGA 800*600@60Hz

Test Line	Frequency (MHz)	Meter Reading dB(μV)	Factor (dB)	Emission Level dB(μV)	Limits dB(μV)	Margin (dB)
VA	0.20	42.74	0.56	43.30	63.45	20.15
	0.30	36.81	0.49	37.30	60.37	23.07
	0.49	34.92	0.48	35.40	56.14	20.74
	0.79	35.83	0.38	36.41	56.00	19.79
	1.23	35.60	0.39	35.99	56.00	20.01
	3.68	39.92	0.36	40.28	56.00	15.72
VB	0.20	43.23	0.56	43.79	63.45	19.66
	0.30	35.42	0.38	35.80	60.37	24.57
	0.79	37.90	0.26	38.16	56.00	17.84
	1.33	39.14	0.30	39.44	56.00	16.56
	3.68	40.49	0.33	40.82	56.00	15.18
	5.80	35.67	0.37	36.04	60.00	23.96

TEST ENGINEER: Sky Shi
(SKY SHI)

EUT : LCD Monitor Temperature : 22°C

Model No. : L204WTM Humidity : 50%

Serial No. : 604NTHM5F265 Date of Test : May 08, 2006

Test Mode : VGA 1024*768@75Hz

Test Line	Frequency (MHz)	Meter Reading dB(μV)	Factor (dB)	Emission Level dB(μV)	Limits dB(μV)	Margin (dB)
VA	0.20	43.02	0.56	43.58	63.49	19.91
	0.30	36.67	0.49	37.16	60.37	23.21
	0.49	35.08	0.48	35.56	56.14	20.58
	1.23	36.42	0.39	36.81	56.00	19.19
	3.68	40.51	0.36	40.87	56.00	15.13
	5.80	36.16	0.39	36.55	60.00	23.45
VB	0.20	43.04	0.56	43.60	63.49	19.89
	0.30	35.56	0.38	35.94	60.37	24.43
	0.49	34.56	0.37	34.93	56.14	21.21
	0.88	37.36	0.27	37.63	56.00	18.37
	1.33	38.11	0.30	38.41	56.00	17.59
	3.68	42.02	0.33	42.35	56.00	13.65

TEST ENGINEER: Sky Shi
(SKY SHI)

EUT : LCD Monitor Temperature : 22°C

Model No. : L204WTM Humidity : 50%

Serial No. : 604NTHM5F265 Date of Test : May 08, 2006

Test Mode : VGA 1280*1024@75Hz

Test Line	Frequency (MHz)	Meter Reading dB(μV)	Factor (dB)	Emission Level dB(μV)	Limits dB(μV)	Margin (dB)
VA	0.20	42.68	0.56	43.24	63.45	20.21
	0.30	36.75	0.49	37.24	60.37	23.13
	0.88	35.34	0.39	35.73	56.00	20.27
	3.68	40.15	0.36	40.51	56.00	15.49
	5.80	37.53	0.39	37.92	60.00	22.08
	24.92	36.05	0.63	36.68	60.00	23.32
VB	0.20	43.00	0.56	43.56	63.49	19.93
	0.30	35.68	0.38	36.06	60.37	24.31
	0.49	34.73	0.37	35.10	56.14	21.04
	0.88	37.26	0.39	37.65	56.00	18.35
	1.33	37.88	0.30	38.18	56.00	17.82
	3.68	42.44	0.36	42.80	56.00	13.20

TEST ENGINEER: Sky Shi
(SKY SHI)

EUT : LCD Monitor Temperature : 22°C

Model No. : L204WTM Humidity : 50%

Serial No. : 604NTHM5F265 Date of Test : May 08, 2006

Test Mode : DVI 800*600@60Hz

Test Line	Frequency (MHz)	Meter Reading dB(μV)	Factor (dB)	Emission Level dB(μV)	Limits dB(μV)	Margin (dB)
VA	0.20	43.10	0.56	43.66	63.45	19.79
	0.30	36.59	0.49	37.08	60.37	23.29
	0.49	35.00	0.48	35.48	56.14	20.66
	0.79	35.97	0.38	36.35	56.00	19.65
	1.23	35.72	0.39	36.11	56.00	19.89
	3.68	38.76	0.36	39.12	56.00	16.88
VB	0.20	43.20	0.56	43.76	63.49	19.73
	0.30	35.48	0.38	35.86	60.37	24.51
	0.49	34.52	0.37	34.89	56.14	21.35
	0.79	37.35	0.26	37.61	56.00	19.39
	1.33	39.38	0.30	39.68	56.00	16.32
	3.68	39.26	0.33	39.59	56.00	16.41

TEST ENGINEER: Sky Shi
(SKY SHI)

EUT : LCD Monitor Temperature : 22°C

Model No. : L204WTM Humidity : 50%

Serial No. : 604NTHM5F265 Date of Test : May 08, 2006

Test Mode : DVI 1024*768@75Hz

Test Line	Frequency (MHz)	Meter Reading dB(μV)	Factor (dB)	Emission Level dB(μV)	Limits dB(μV)	Margin (dB)
VA	0.20	43.52	0.56	44.08	63.45	19.37
	0.30	36.91	0.49	37.40	60.37	22.97
	0.49	35.06	0.48	35.54	56.14	20.60
	0.79	35.52	0.38	35.90	56.00	20.10
	1.23	35.97	0.39	36.36	56.00	19.64
	3.68	38.55	0.36	38.91	56.00	17.09
VB	0.20	43.85	0.56	44.41	63.45	19.04
	0.30	35.48	0.38	35.86	60.37	24.51
	0.79	37.07	0.26	37.33	56.00	18.67
	1.33	38.58	0.30	38.88	56.00	17.12
	3.60	37.71	0.33	38.04	56.00	17.96
	5.51	38.57	0.36	38.93	60.00	21.07

TEST ENGINEER: Sky Shi
(SKY SHI)

EUT : LCD Monitor Temperature : 22°C

Model No. : L204WTM Humidity : 50%

Serial No. : 604NTHM5F265 Date of Test : May 08, 2006

Test Mode : DVI 1280*1024@75Hz

Test Line	Frequency (MHz)	Meter Reading dB(μV)	Factor (dB)	Emission Level dB(μV)	Limits dB(μV)	Margin (dB)
VA	0.20	44.43	0.56	44.99	63.45	18.46
	0.30	36.69	0.49	37.18	60.37	23.19
	0.49	34.78	0.48	35.26	56.14	20.88
	0.79	35.79	0.38	36.17	56.00	19.83
	1.43	34.84	0.37	35.21	56.00	20.79
	3.35	38.32	0.35	38.67	56.00	17.33
VB	0.20	44.50	0.56	45.06	63.45	18.39
	0.30	35.48	0.38	35.86	60.37	24.51
	0.79	37.74	0.26	38.00	56.00	18.00
	1.33	38.66	0.30	38.96	56.00	17.04
	1.92	36.49	0.30	36.79	56.00	19.21
	3.60	37.97	0.33	38.30	56.00	17.70

TEST ENGINEER: Sky Shi
(SKY SHI)

4 RADIATED EMISSION TEST


4.1 Test Equipment

The following test equipment are used during the radiated emission test in a semi-anechoic chamber:


Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	HP	8593EM	3628A00167	Apr 18, 2006	Apr 18, 2007
2.	Bilog Antenna	Chase	CBL6111	1146	Mar 18, 2006	Sep 18, 2006
3.	Test Receiver	R&S	ESVS10	844594/001	Apr 18, 2006	Apr 18, 2007
4.	Preamplifier	HP	8447D	2944A10548	Mar 19, 2006	Sep 19, 2006
5.	Preamplifier	HP	8449B	3008A00864	Apr 18, 2006	Apr 18, 2007
6.	Horn Antenna	EMCO	3115	9607-4878	Apr 18, 2006	Apr 18, 2007
7.	50Ω Coaxial Switch	Anritsu	MP59B	6200426390	Mar 18, 2006	Sep 18, 2006
8.	Software	Audix	E3	SET00200 9912M295-2	--	--

4.2 Block Diagram of Test Setup

4.2.1 EUT and simulators

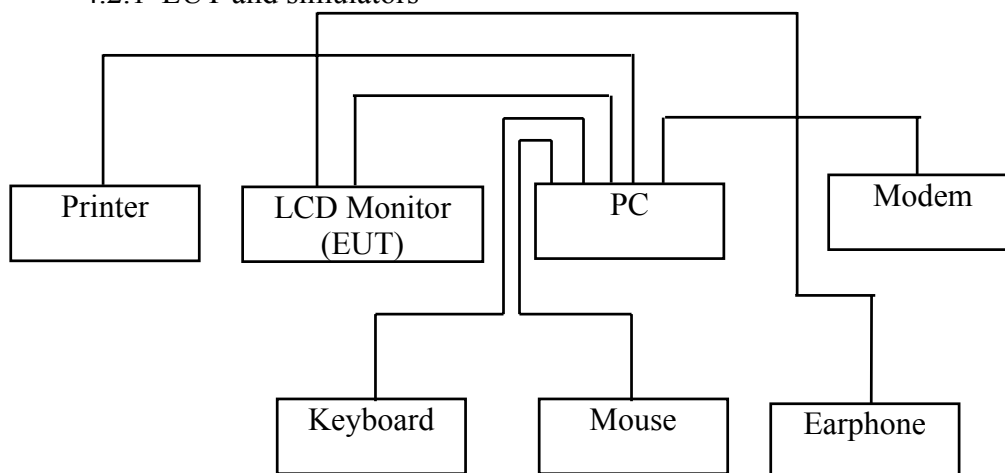

4.2.2 Radiated emission test setup

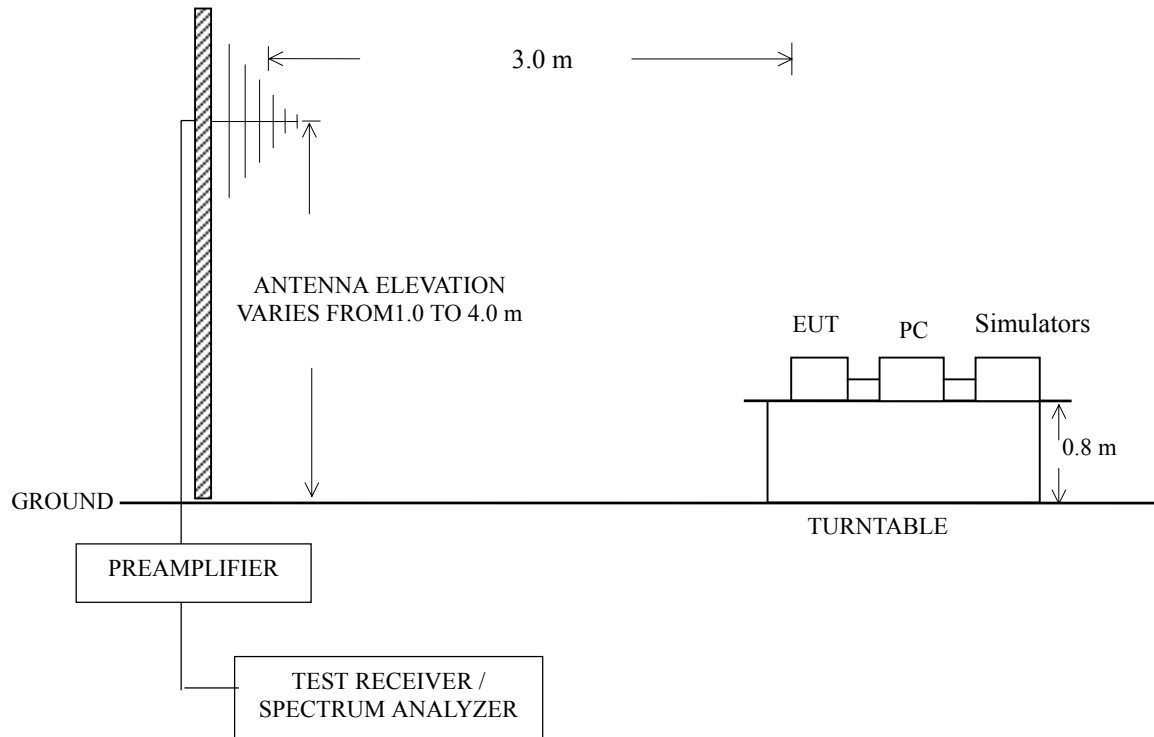

4.3 Radiated Emission Limit

Frequency (MHz)	Distance (m)	Field strength limits	
		($\mu\text{V/m}$)	dB ($\mu\text{V/m}$)
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
Above 960	3	500	54.0

NOTE 1 - Emission Level dB ($\mu\text{V/m}$) = 20 log Emission Level ($\mu\text{V/m}$)

NOTE 2 - The tighter limit applies at the band edges.

NOTE 3 - Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

NOTE 4 - On any frequencies above 1000MHz, there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function corresponding to 20 dB above the maximum permitted average limit for the frequency being investigated.

4.4 Test Configuration

The configuration of the EUT and simulators are same as those used in conducted emission test.

Please refer to Sec.3.4.

4.5 Operating Condition of EUT

Same as conducted emission test which is listed in Sec.3.5, except the test setup replaced by Sec.4.2.

4.6 Test Procedures

The EUT and simulators were placed on a turntable that is 0.8 meter above ground. The turntable rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna, which was mounted on an antenna tower. The antenna moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (Calibrated Bilog Antenna) was used as receiving antenna. Both horizontal and vertical polarizations of the antenna were set on measurement. In order to find the maximum emission, all of the interference cables were manipulated according to ANSI C63.4:2003 requirements during radiated emission test.

The bandwidth of Test Receiver R&S ESVS10 was set at 120 kHz.

The frequency range from 30 MHz to 1000 MHz was checked for all the test modes.

The frequency range from 1 GHz to 2 GHz was checked for VGA 1280*1024@75Hz and DVI 1280*1024@75Hz modes.

The test modes were done on radiated disturbance test and all the test results are listed in Sec.4.7.

The test modes are as follows:

VGA 800*600@60Hz	VGA 1024*768@75Hz	VGA 1280*1024@75Hz
DVI 800*600@60Hz	DVI 1024*768@75Hz	DVI 1280*1024@75Hz

4.7 Test Results

<PASS>

The frequency and amplitude of the highest radiated emission relative the limit is reported. All the emissions not reported below are too low against the FCC limit.

NOTE 1 - Emission Level = Meter Reading + Factor.

NOTE 2 - Factor = Antenna Factor + Cable Loss - Preamp Factor.

NOTE 3 - The readings that below 1000 MHz are Quasi-Peak values, above 1000 MHz are peak values.

NOTE 4 - 0° was the table front facing the antenna. Degree is calculated from 0° clockwise facing the antenna.

NOTE 5 - The worst case is for DVI 1280*1024@75Hz mode. The worst emission at horizontal polarization was detected at 674.08 MHz with corrected signal level of 42.96dB (μV/m) (limit is 46.00 dB (μV/m)), when the antenna was 1.10 m height and the turntable was at 202°. The worst emission at vertical polarization was detected at 30.00 MHz with corrected signal level of 45.77 dB (μV/m) (limit is 40.00 dB (μV/m)), when the antenna was 1.13 m height and the turntable was at 42°.

EUT : LCD Monitor Temperature : 23°C

Model No. : L204WTM Humidity : 60%

Serial No. : 604NTHM5F265 Date of Test : May 11, 2006

Test Mode : VGA 800*600@60Hz

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)
Horizontal	72.68	46.60	20.39	1.41	28.53	26.21	40.00	13.79
	85.29	47.97	19.82	1.53	28.55	28.15	40.00	11.85
	169.68	41.98	15.46	2.23	28.15	26.52	43.50	16.98
	424.79	40.84	7.22	3.69	28.43	33.62	46.00	12.38
	504.33	41.96	6.48	4.06	28.80	35.48	46.00	10.52
	676.99	40.56	1.67	4.74	28.88	38.89	46.00	7.11
Vertical	30.97	44.86	12.87	0.92	28.70	31.99	40.00	8.01
	85.29	48.43	19.82	1.53	28.55	28.61	40.00	11.39
	169.68	41.98	15.46	2.23	28.15	26.52	43.50	16.98
	227.88	38.80	12.05	2.58	27.78	26.75	46.00	19.25
	504.33	39.82	6.48	4.06	28.80	33.34	46.00	12.66
	672.14	36.19	1.76	4.74	28.88	34.43	46.00	11.57

TEST ENGINEER: Season Yang
(SEASON YANG)

EUT : LCD Monitor Temperature : 23°C

Model No. : L204WTM Humidity : 60%

Serial No. : 604NTHM5F265 Date of Test : May 11, 2006

Test Mode : VGA 1024*768@75Hz

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)
Horizontal	70.74	46.01	20.41	1.38	28.51	25.60	40.00	14.40
	99.84	43.68	16.67	1.65	28.40	27.01	43.50	16.49
	177.44	45.24	15.55	2.27	28.11	29.69	43.50	13.81
	421.88	41.51	7.28	3.65	28.42	34.23	46.00	11.77
	507.24	42.02	6.42	4.07	28.80	35.60	46.00	10.40
	676.99	39.63	1.67	4.74	28.88	37.96	46.00	8.04
Vertical	30.97	45.04	12.87	0.92	28.70	32.17	40.00	7.83
	85.29	47.50	19.82	1.53	28.55	27.68	40.00	12.32
	128.94	42.43	14.75	1.90	28.25	27.68	43.50	15.82
	177.44	44.23	15.55	2.27	28.11	28.68	43.50	14.82
	421.88	41.65	7.28	3.65	28.42	34.37	46.00	11.63
	676.99	37.35	1.67	4.74	28.88	35.68	46.00	10.32

TEST ENGINEER: Season Yang
(SEASON YANG)

EUT : LCD Monitor Temperature : 23°C

Model No. : L204WTM Humidity : 60%

Serial No. : 604NTHM5F265 Date of Test : May 10, 2006

Test Mode : VGA 1280*1024@75Hz

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)
Horizontal	31.94	44.87	12.98	0.92	28.70	31.89	40.00	8.11
	101.78	46.49	16.54	1.65	28.39	29.95	43.50	13.55
	169.68	48.50	15.46	2.23	28.15	33.04	43.50	10.46
	237.58	41.34	11.11	2.64	27.75	30.23	46.00	15.77
	504.33	40.53	6.48	4.06	28.80	34.05	46.00	11.95
	662.44	38.58	2.00	4.67	28.87	36.58	46.00	9.42
Vertical	31.94	46.39	12.98	0.92	28.70	33.41	40.00	6.59
	46.49	45.45	17.99	1.11	28.70	27.46	40.00	12.54
	82.38	44.98	20.13	1.51	28.58	24.85	40.00	15.15
	169.68	44.80	15.46	2.23	28.15	29.34	43.50	14.16
	439.34	40.91	7.15	3.73	28.51	33.76	46.00	12.24
	664.38	34.17	2.01	4.66	28.87	32.16	46.00	13.84

TEST ENGINEER: Season Yang
(SEASON YANG)

EUT : LCD Monitor Temperature : 23°C

Model No. : L204WTM Humidity : 60%

Serial No. : 604NTHM5F265 Date of Test : May 12, 2006

Test Mode : VGA 1280*1024@75Hz

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	1139.00	47.32	6.11	6.46	37.33	41.21	74.00	32.79	PK
	1237.00	50.55	5.12	6.79	37.09	45.43	74.00	28.57	
	1484.00	45.40	2.64	7.82	36.56	42.76	74.00	31.24	
	1594.00	49.67	1.83	8.07	36.35	47.84	74.00	26.16	
	1722.00	44.06	0.24	9.53	36.13	44.30	74.00	29.70	
	1987.00	43.26	0.99	9.14	35.72	44.25	74.00	29.75	
Vertical	1097.00	49.59	6.39	6.47	37.43	43.20	74.00	30.80	PK
	1237.00	46.98	5.12	6.79	37.09	41.86	74.00	32.14	
	1399.00	57.40	3.53	7.41	36.73	53.87	74.00	20.13	
	1599.00	51.86	1.84	8.04	36.34	50.02	74.00	23.98	
	1722.00	44.06	0.24	9.53	36.13	44.30	74.00	29.70	
	1977.00	42.49	0.99	9.18	35.73	43.48	74.00	30.52	

TEST ENGINEER: Season Yang
(SEASON YANG)

EUT : LCD Monitor Temperature : 23°C

Model No. : L204WTM Humidity : 60%

Serial No. : 604NTHM5F265 Date of Test : May 11, 2006

Test Mode : DVI 800*600@60Hz

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)
Horizontal	48.43	38.44	18.76	1.14	28.70	19.68	40.00	20.32
	85.29	46.94	19.82	1.53	28.55	27.12	40.00	12.88
	133.79	41.56	14.77	1.94	28.23	26.79	43.50	16.71
	298.69	37.40	10.37	3.02	27.60	17.03	46.00	18.97
	599.39	39.98	3.39	4.55	28.80	36.59	46.00	9.41
	885.54	34.52	0.11	5.49	28.44	34.63	46.00	11.37
Vertical	31.94	46.10	12.98	0.92	28.70	33.12	40.00	6.88
	85.29	50.26	19.82	1.53	28.55	30.44	40.00	9.56
	169.68	41.66	15.46	2.23	28.15	26.20	43.50	17.30
	423.82	39.34	7.24	3.69	28.43	32.10	46.00	13.90
	504.33	43.21	6.48	4.06	28.80	36.73	46.00	9.27
	675.14	35.28	1.76	4.74	28.88	33.52	46.00	12.48

TEST ENGINEER: Season Yang
(SEASON YANG)

EUT : LCD Monitor Temperature : 23°C

Model No. : L204WTM Humidity : 60%

Serial No. : 604NTHM5F265 Date of Test : May 11, 2006

Test Mode : DVI 1024*768@75Hz

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)
Horizontal	31.94	40.93	12.98	0.92	12.98	27.95	40.00	12.05
	85.29	46.50	19.82	1.53	19.82	26.68	40.00	13.32
	133.79	43.10	14.77	1.94	14.77	28.33	43.50	15.17
	315.18	41.09	9.91	3.10	9.91	31.18	46.00	14.82
	591.63	38.63	3.77	4.38	3.77	34.86	46.00	11.14
	759.44	35.07	0.69	5.23	0.69	34.38	46.00	11.62
Vertical	32.91	45.04	13.07	0.92	28.70	31.97	40.00	8.03
	84.32	49.62	19.90	1.53	28.55	29.72	40.00	10.28
	169.68	43.06	15.46	2.23	28.15	27.60	43.50	15.90
	323.33	40.68	11.58	2.61	27.77	29.10	46.00	16.90
	504.33	41.63	6.48	4.06	28.80	35.15	46.00	10.85
	761.38	32.79	0.70	5.22	28.77	32.09	46.00	13.91

TEST ENGINEER: Season Yang
(SEASON YANG)

EUT : LCD Monitor Temperature : 23°C

Model No. : L204WTM Humidity : 60%

Serial No. : 604NTHM5F265 Date of Test : May 11, 2006

Test Mode : DVI 1280*1024@75Hz

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)
Horizontal	30.97	38.42	12.87	0.92	38.70	25.55	40.00	14.45
	82.38	47.62	20.13	1.51	28.58	27.49	40.00	12.51
	135.73	42.55	14.81	1.92	28.22	27.74	43.50	15.76
	405.39	41.66	7.42	3.56	28.33	34.24	46.00	11.76
	674.08	42.96	1.71	4.74	28.88	41.25	46.00	4.75
	807.94	39.45	0.50	5.32	28.67	38.95	46.00	7.05
Vertical	30.00	45.77	12.76	0.92	28.70	33.01	40.00	6.99
	51.34	50.13	19.51	1.18	28.70	30.62	40.00	9.38
	82.38	49.70	20.13	1.51	28.58	29.57	40.00	10.43
	128.94	41.23	14.75	1.90	28.25	26.48	43.50	17.02
	489.78	42.14	6.76	3.97	28.75	35.38	46.00	10.62
	807.94	37.80	0.50	5.32	28.67	37.30	46.00	8.70

TEST ENGINEER: Season Yang
(SEASON YANG)

EUT : LCD Monitor Temperature : 23°C

Model No. : L204WTM Humidity : 60%

Serial No. : 604NTHM5F265 Date of Test : May 12, 2006

Test Mode : DVI 1280*1024@75Hz

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	1079.00	45.32	6.57	6.43	37.48	38.75	74.00	35.25	PK
	1237.00	50.38	5.12	6.79	37.09	45.26	74.00	28.74	
	1444.00	45.08	3.10	7.59	36.64	41.98	74.00	32.02	
	1597.00	49.48	1.85	8.04	36.35	47.63	74.00	26.37	
	1798.00	41.99	0.80	9.74	36.00	42.79	74.00	31.21	
	1947.00	42.37	0.69	9.00	35.78	43.06	74.00	30.94	
Vertical	1077.00	47.91	6.64	6.36	37.48	41.27	74.00	32.73	PK
	1237.00	47.68	5.12	6.79	37.09	42.56	74.00	31.44	
	1397.00	54.62	3.53	7.41	36.73	51.09	74.00	22.91	
	1592.00	51.19	1.84	8.07	36.36	43.35	74.00	24.65	
	1737.00	43.79	0.29	9.51	36.11	44.08	74.00	29.92	
	1967.00	42.51	0.77	9.00	35.74	43.28	74.00	30.72	

TEST ENGINEER: Season Yang
(SEASON YANG)

5 DEVIATION TO TEST SPECIFICATIONS

None

6 DEBUG DESCRIPTION

Name	M/N:	Specifications (mm)	Manufacturer	Location
AL-tape	T-308	30*50	Fuzhou Huibang ELECTRONIC Corp.	See Appendix II Figure 10, 12
Conductive Gasket	3940TKK122	80*10*3	EXPAN	See Appendix II Figure 6, 20