

TABLE OF CONTENTS


A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band.....	41
A.2.3 Emissions in Non-restricted Frequency Bands.....	41
A.3 EMISSION BANDWIDTH	42
A.3.1 Emission Bandwidth Result.....	42
A.3.2 Measurement Plots	44
A.4 MAXIMUM OUTPUT POWER	54
A.4.1 Average Output Power	54
A.4.2 Measurement Plots	56
A.5 EMISSION LIMITATIONS MEASUREMENT	59
A.6 POWER SPECTRAL DENSITY	145
A.6.1 Power Spectral Density Result	145
A.6.2 Measurement Plots	148
A.7 FREQUENCY STABILITY	156
A.7.1 Frequency stability Result	156

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.1 CONDUCTED EMISSION

Test Date	2018/10/30	Temp./Hum.	24°C/49%
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

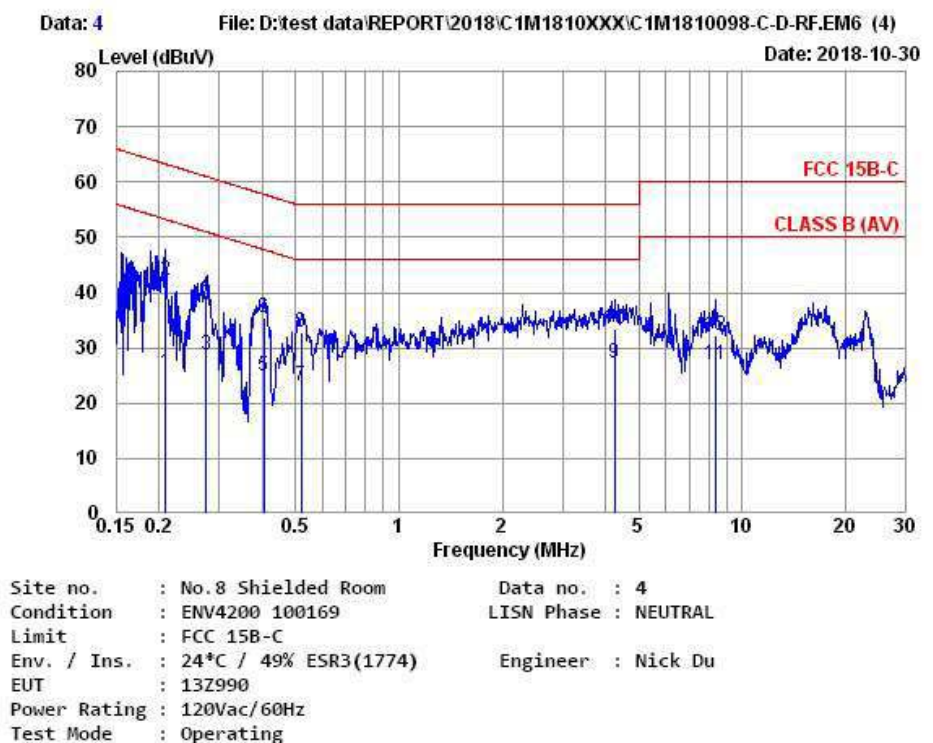


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.209	10.51	0.03	9.98	4.88	25.40	53.23	27.83	Average
2	0.209	10.51	0.03	9.98	21.67	42.19	63.23	21.04	QP
3	0.274	10.48	0.03	9.98	8.24	28.73	50.98	22.25	Average
4	0.274	10.48	0.03	9.98	19.01	39.50	60.98	21.48	QP
5	0.404	10.43	0.04	9.98	4.53	24.98	47.77	22.79	Average
6	0.404	10.43	0.04	9.98	15.05	35.50	57.77	22.27	QP
7	0.518	10.43	0.05	9.98	2.61	23.07	46.00	22.93	Average
8	0.518	10.43	0.05	9.98	12.41	32.87	56.00	23.13	QP
9	4.247	10.64	0.11	10.00	6.56	27.31	46.00	18.69	Average
10	4.247	10.64	0.11	10.00	12.60	33.35	56.00	22.65	QP
11	8.323	11.16	0.17	10.01	5.66	27.00	50.00	23.00	Average
12	8.323	11.16	0.17	10.01	10.88	32.22	60.00	27.78	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2018/10/30	Temp./Hum.	24°C/49%
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

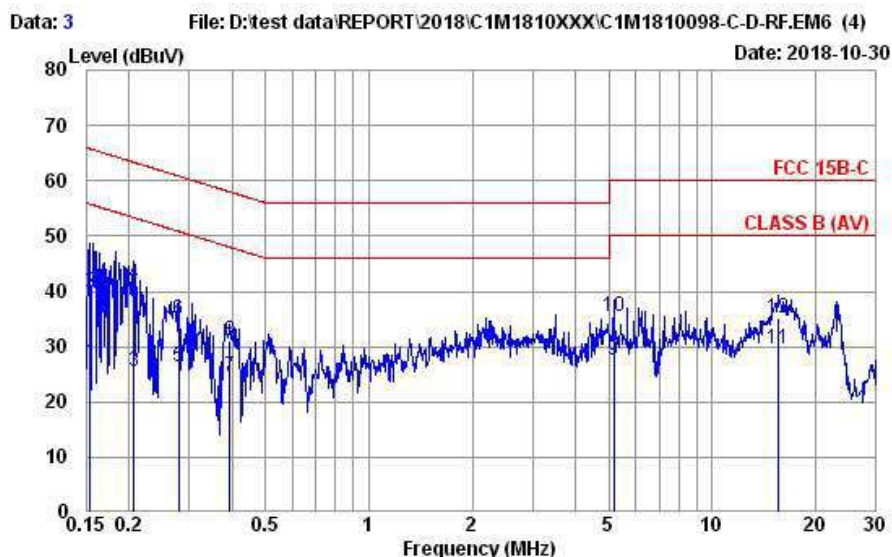

Site no. : No.8 Shielded Room Data no. : 3
Condition : ENV4200 100169 LISN Phase : LINE
Limit : FCC 15B-C
Env. / Ins. : 24°C / 49% ESR3(1774) Engineer : Nick Du
EUT : 13Z990
Power Rating : 120Vac/60Hz
Test Mode : Operating

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.154	10.62	0.03	9.98	6.28	26.91	55.78	28.87	Average
2	0.154	10.62	0.03	9.98	19.19	39.82	65.78	25.96	QP
3	0.207	10.55	0.03	9.98	4.86	25.42	53.32	27.90	Average
4	0.207	10.55	0.03	9.98	20.80	41.36	63.32	21.96	QP
5	0.279	10.51	0.03	9.98	5.84	26.36	50.85	24.49	Average
6	0.279	10.51	0.03	9.98	14.24	34.76	60.85	26.09	QP
7	0.393	10.45	0.04	9.98	4.10	24.57	47.99	23.42	Average
8	0.393	10.45	0.04	9.98	10.63	31.10	57.99	26.89	QP
9	5.166	10.79	0.13	10.00	6.54	27.46	50.00	22.54	Average
10	5.166	10.79	0.13	10.00	14.50	35.42	60.00	24.58	QP
11	15.552	12.74	0.23	10.05	6.71	29.73	50.00	20.27	Average
12	15.552	12.74	0.23	10.05	12.29	35.31	60.00	24.69	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

A.2 RADIATED EMISSION

Test Date	2018/11/02	Temp./Hum.	23°C/50%
Test Voltage	AC 120V, 60Hz (via AC Adapter)		

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

Mode	802.11n-HT20	UNII Band	III
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.97	24.27	1.22	6.01	31.50	40.00	8.50	Peak
101.78	17.60	2.29	8.64	28.53	43.50	14.97	Peak
273.47	19.32	4.05	4.99	28.36	46.00	17.64	Peak
392.78	21.88	5.47	3.37	30.72	46.00	15.28	Peak
578.05	24.35	6.69	2.24	33.28	46.00	12.72	Peak
734.22	25.25	7.27	1.97	34.49	46.00	11.51	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.94	23.76	1.25	14.15	39.16	40.00	0.84	Peak
94.99	16.56	2.21	12.34	31.11	43.50	12.39	Peak
239.52	18.47	3.71	6.88	29.06	46.00	16.94	Peak
325.85	20.21	4.66	8.38	33.25	46.00	12.75	Peak
479.11	22.94	6.26	2.96	32.16	46.00	13.84	Peak
713.85	25.03	7.16	2.57	34.76	46.00	11.24	Peak


Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	802.11a	UNII Band	I
		Frequency	TX 5180MHz

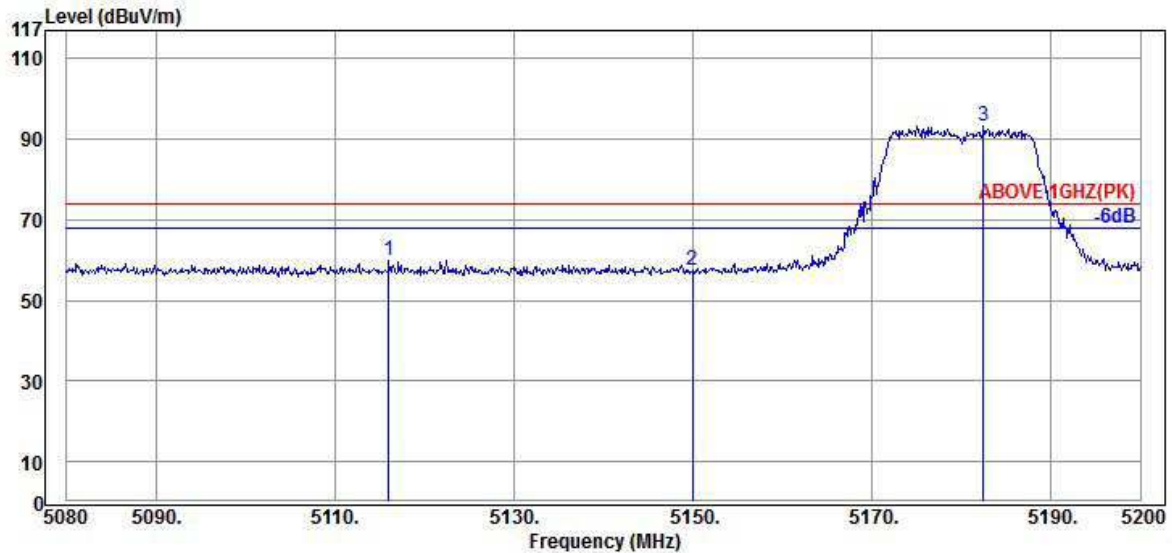

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5116.00	33.39	9.32	17.13	59.84	74.00	14.16	Peak
5149.96	33.44	9.34	14.91	57.69	74.00	16.31	Peak
5182.48	33.49	9.36	50.36	93.21	---	---	Peak

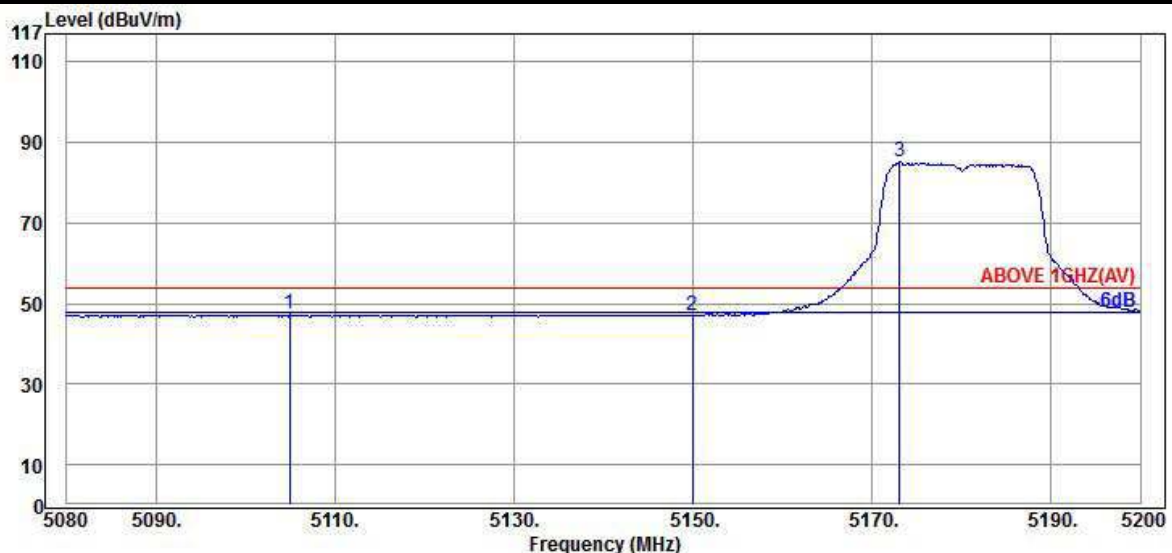


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5104.96	33.37	9.31	4.61	47.29	54.00	6.71	Average
5149.96	33.44	9.34	4.19	46.97	54.00	7.03	Average
5173.12	33.49	9.36	42.27	85.12	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	UNII Band	I
		Frequency	TX 5180MHz

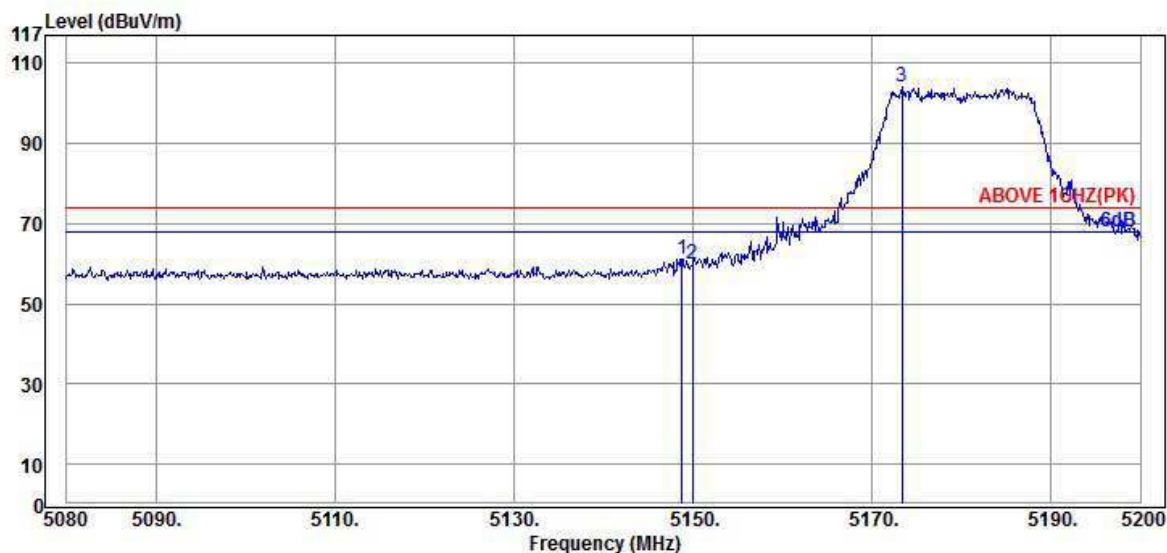

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector
5148.76	33.44	9.34	18.41	61.19	74.00	12.81	Peak
5149.96	33.44	9.34	17.02	59.80	74.00	14.20	Peak
5173.36	33.49	9.36	61.37	104.22	---	---	Peak

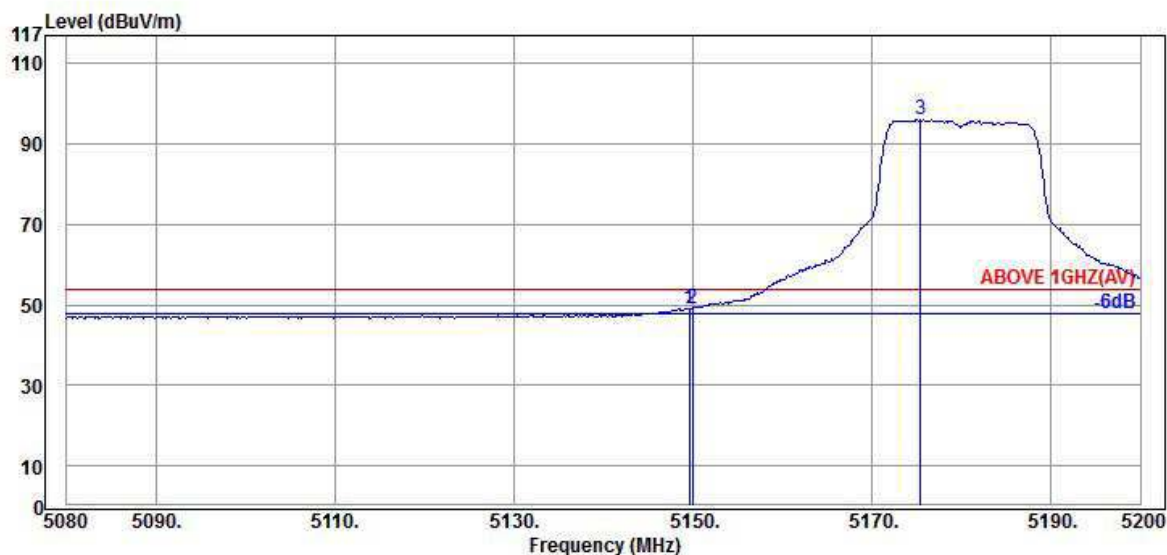


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector
5149.60	33.44	9.34	6.36	49.14	54.00	4.86	Average
5149.96	33.44	9.34	6.32	49.10	54.00	4.90	Average
5175.40	33.49	9.36	53.17	96.02	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	UNII Band	II-2A
		Frequency	TX 5320MHz

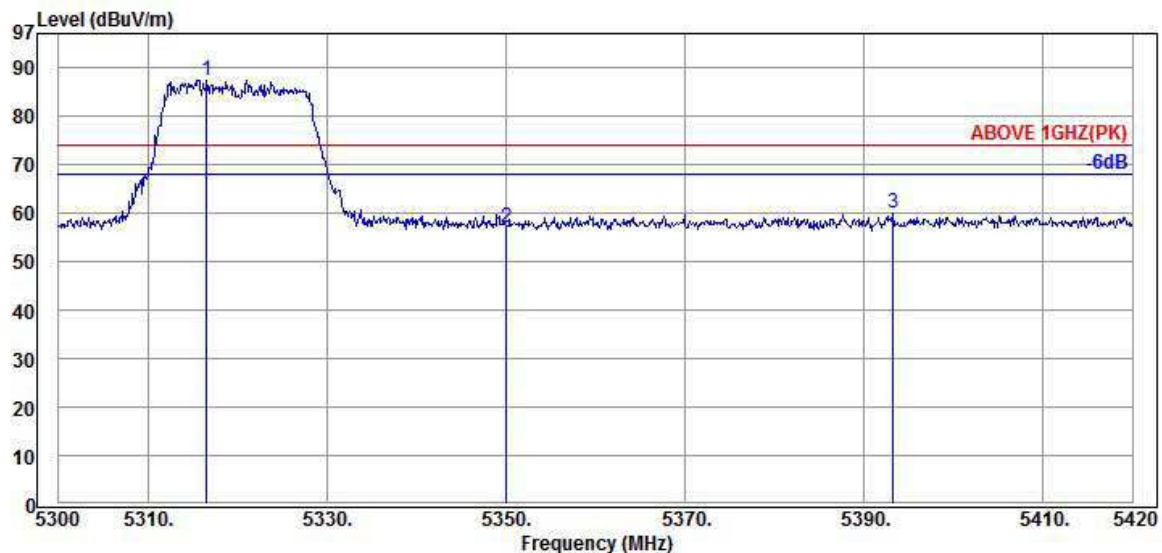

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5316.56	33.71	9.44	44.33	87.48	---	---	Peak
5350.04	33.76	9.46	13.89	57.11	74.00	16.89	Peak
5393.24	33.83	9.49	16.72	60.04	74.00	13.96	Peak

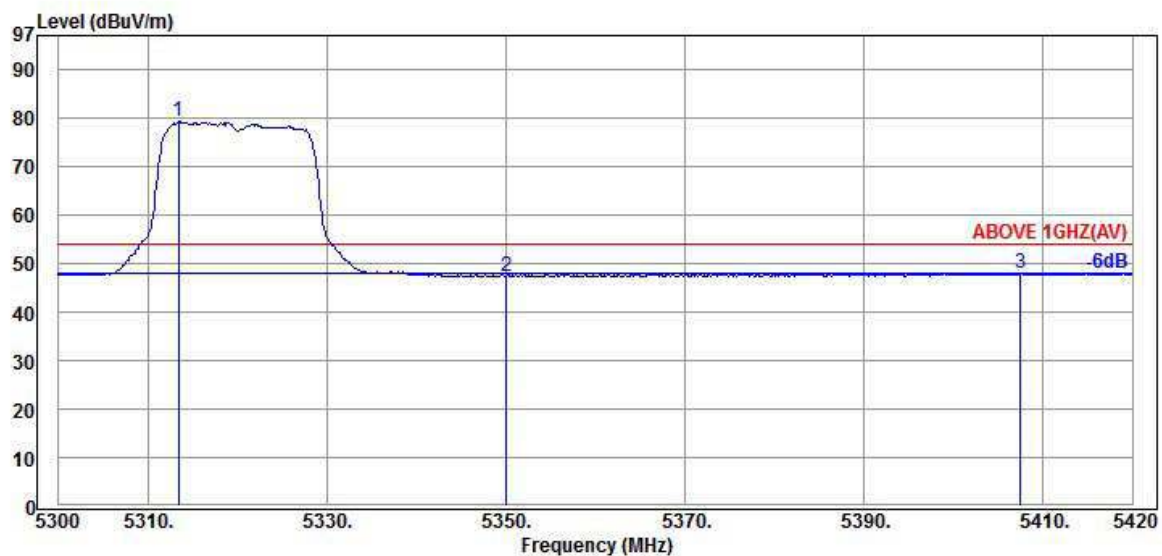


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5313.44	33.71	9.44	36.13	79.28	---	---	Average
5350.04	33.76	9.46	4.18	47.40	54.00	6.60	Average
5407.52	33.85	9.49	4.60	47.94	54.00	6.06	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	UNII Band	II-2A
		Frequency	TX 5320MHz

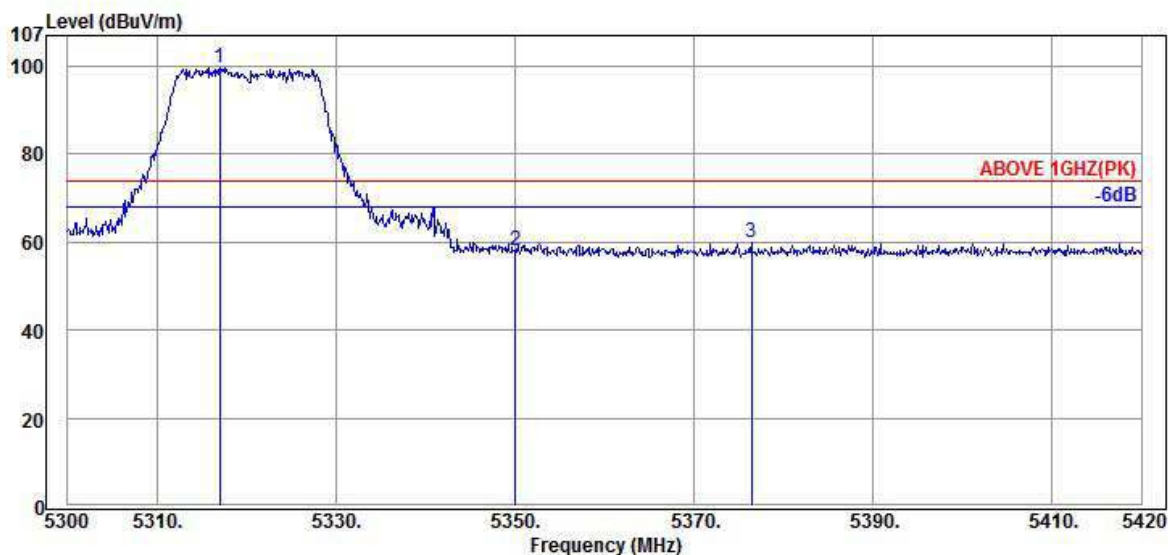

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5317.04	33.71	9.44	56.57	99.72	---	---	Peak
5350.04	33.76	9.46	14.93	58.15	74.00	15.85	Peak
5376.44	33.81	9.47	16.47	59.75	74.00	14.25	Peak

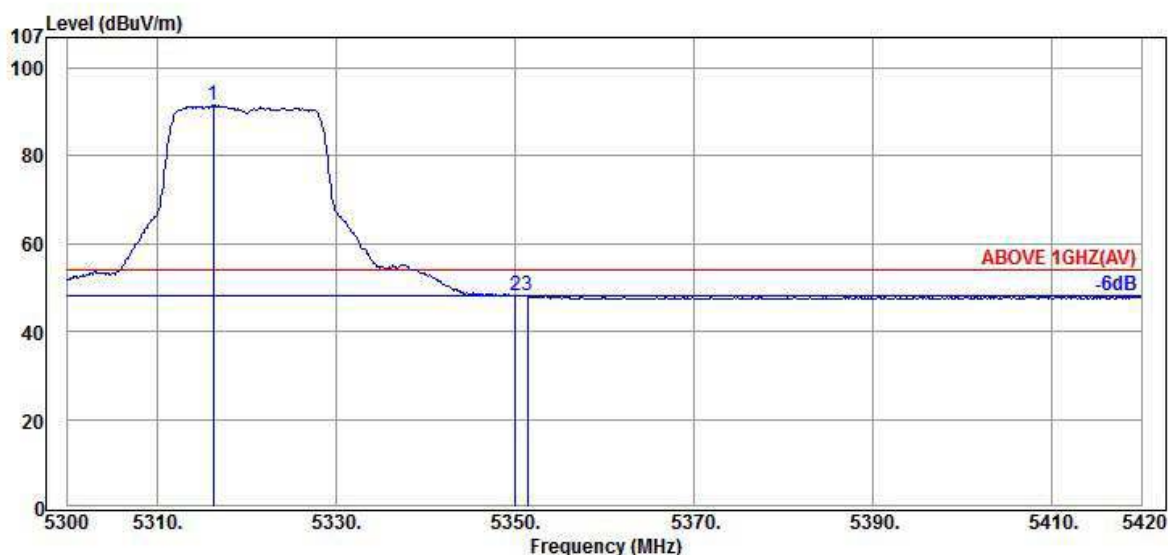


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5316.32	33.71	9.44	48.25	91.40	---	---	Average
5350.04	33.76	9.46	4.99	48.21	54.00	5.79	Average
5351.36	33.76	9.46	4.95	48.17	54.00	5.83	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	UNII Band	II-2C
		Frequency	TX 5500MHz

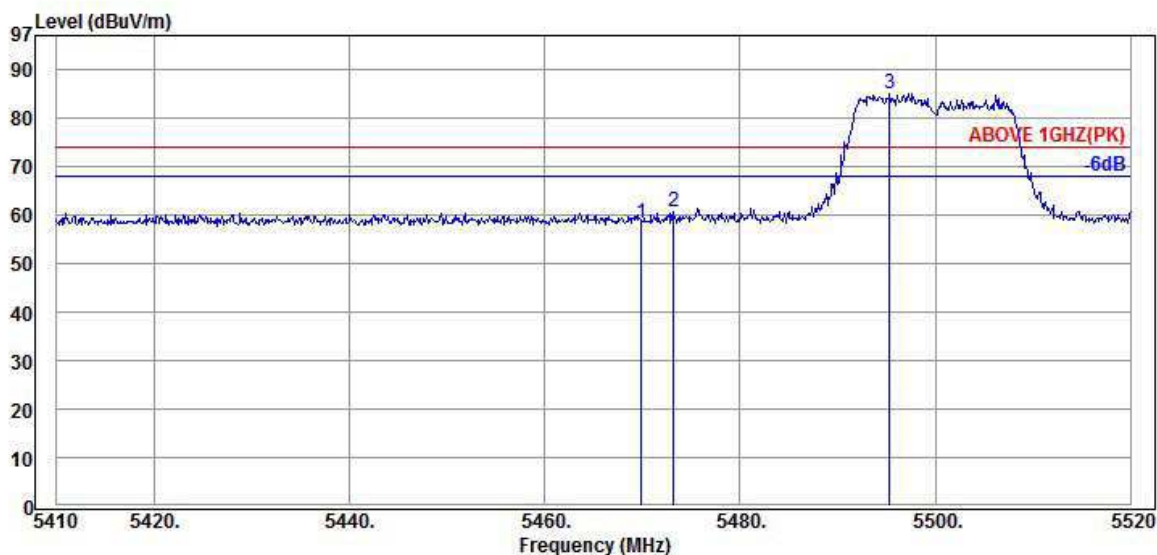

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.95	33.95	9.53	14.91	58.39	74.00	15.61	Peak
5473.25	33.95	9.53	17.20	60.68	74.00	13.32	Peak
5495.36	34.00	9.55	41.49	85.04	---	---	Peak

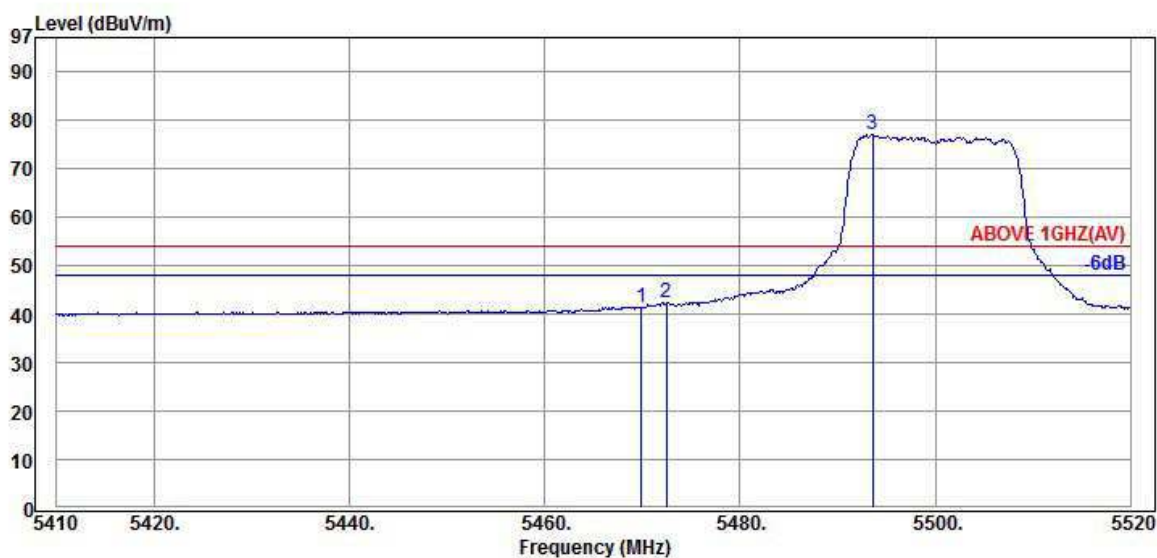


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.95	33.95	9.53	-2.24	41.24	54.00	12.76	Average
5472.48	33.95	9.53	-1.20	42.28	54.00	11.72	Average
5493.60	33.98	9.55	33.47	77.00	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	UNII Band	II-2C
		Frequency	TX 5500MHz

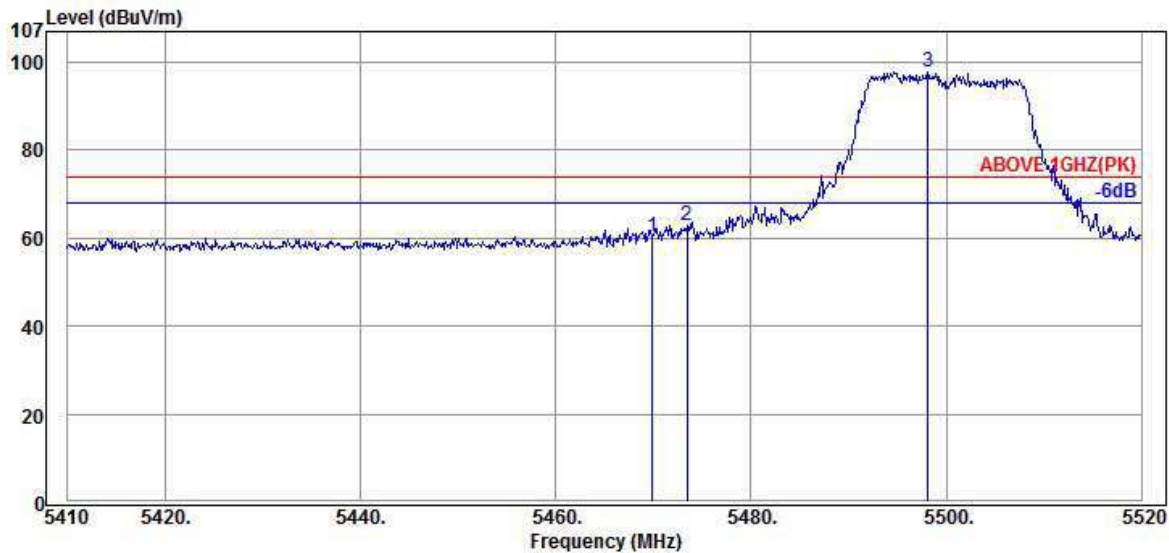

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.95	33.95	9.53	16.71	60.19	74.00	13.81	Peak
5473.47	33.95	9.53	19.44	62.92	74.00	11.08	Peak
5498.11	34.00	9.55	54.32	97.87	---	---	Peak

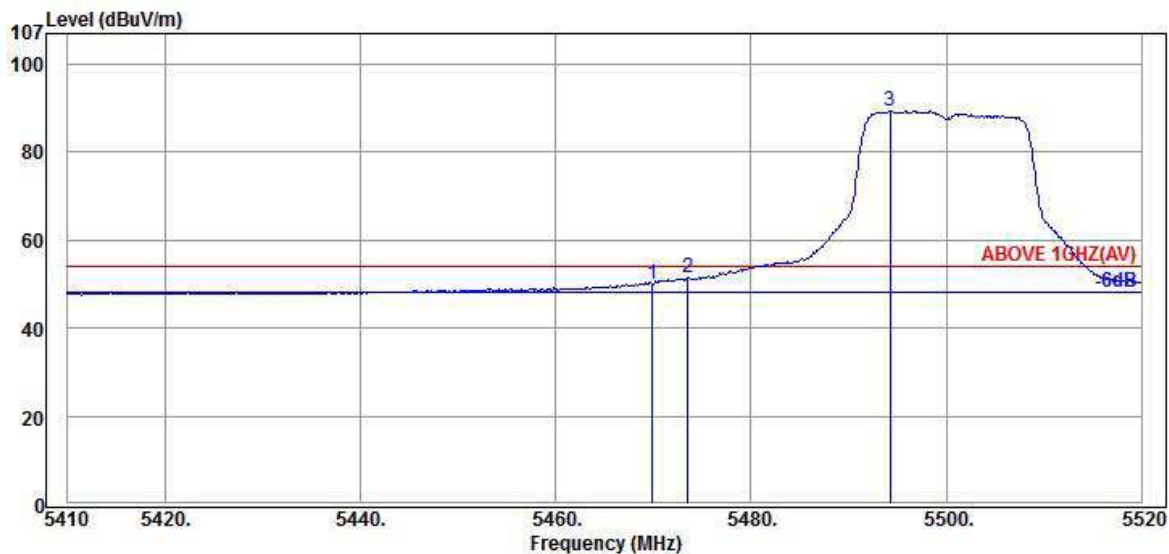

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.95	33.95	9.53	6.70	50.18	54.00	3.82	Average
5473.58	33.95	9.53	7.93	51.41	54.00	2.59	Average
5494.26	33.98	9.55	45.89	89.42	---	---	Average

Mode	802.11a	UNII Band	II-2C
		Frequency	TX 5700MHz

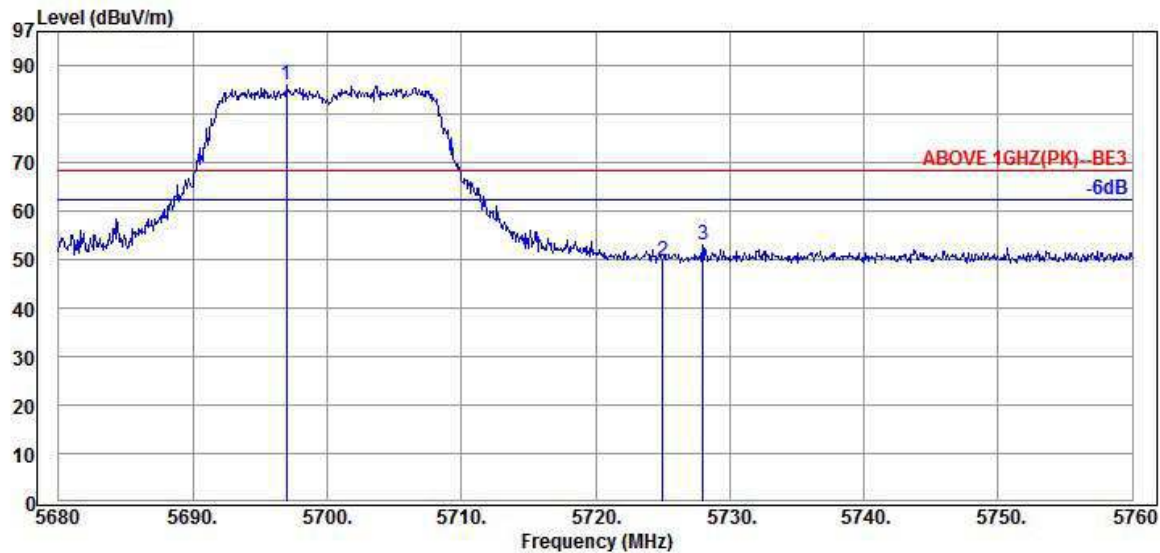

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5696.96	34.04	9.67	42.39	86.10	68.20	---	Peak
5725.04	34.05	9.68	5.93	49.66	68.20	18.54	Peak
5728.00	34.05	9.68	9.28	53.01	68.20	15.19	Peak

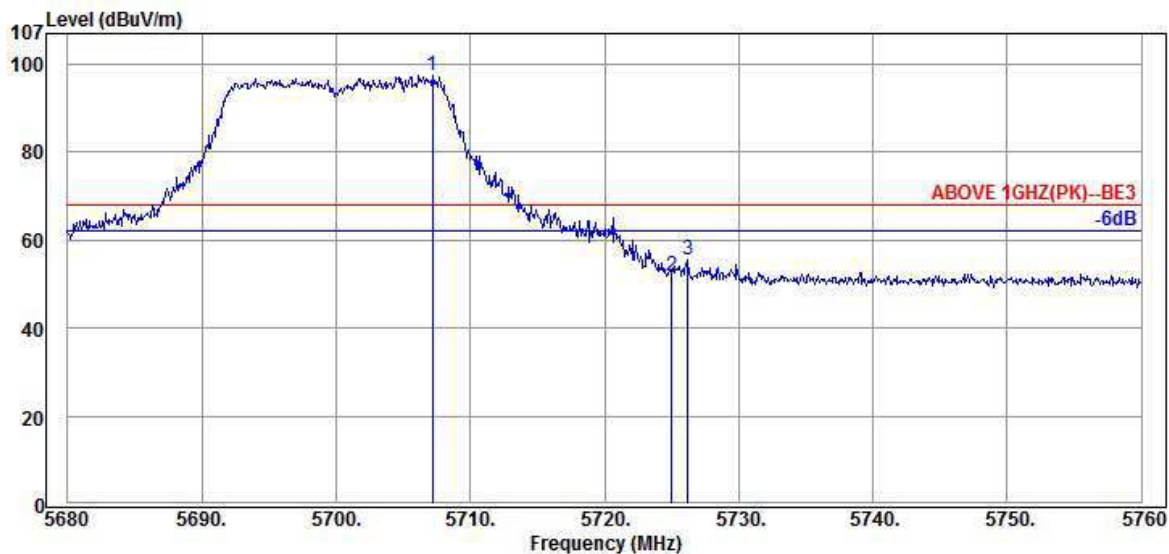


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5707.20	34.04	9.67	53.69	97.40	68.20	---	Peak
5725.04	34.05	9.68	7.94	51.67	68.20	16.53	Peak
5726.24	34.05	9.68	11.94	55.67	68.20	12.53	Peak

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	I
		Frequency	TX 5180MHz

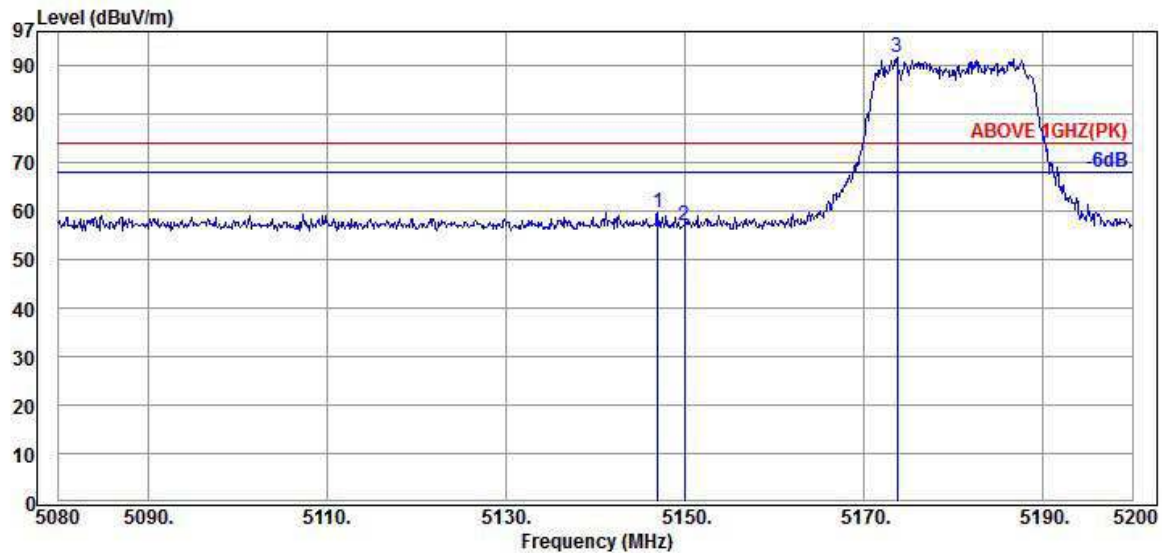

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.96	33.44	9.34	51.54	59.77	74.00	14.23	Peak
5149.96	33.44	9.34	48.92	57.15	74.00	16.85	Peak
5173.72	33.49	9.36	83.22	91.52	---	---	Peak

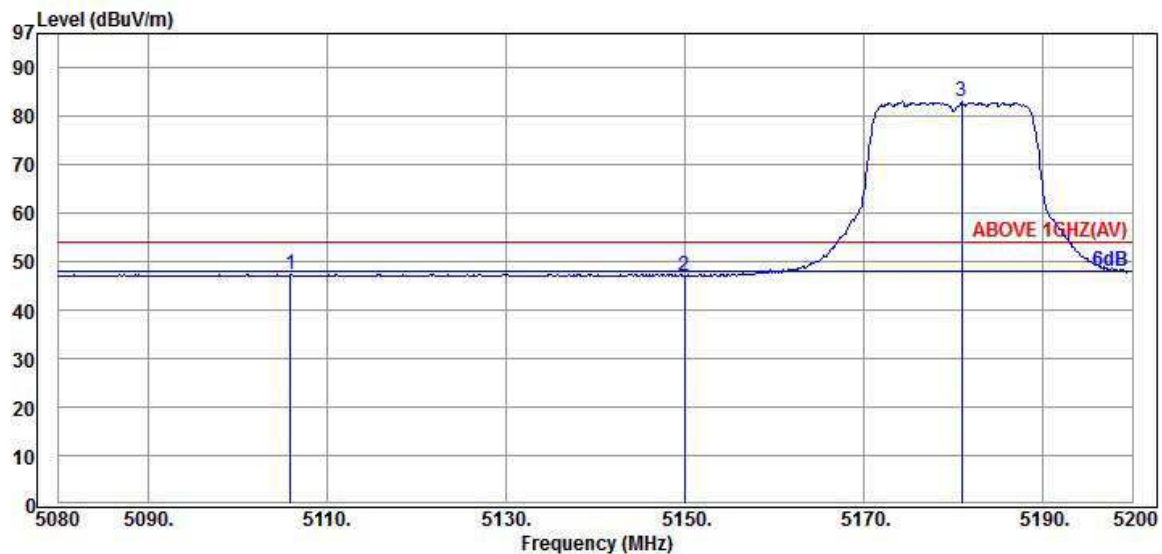


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5105.92	33.37	9.31	39.25	47.39	54.00	6.61	Average
5149.96	33.44	9.34	38.87	47.10	54.00	6.90	Average
5180.92	33.49	9.36	74.57	82.87	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	I
		Frequency	TX 5180MHz

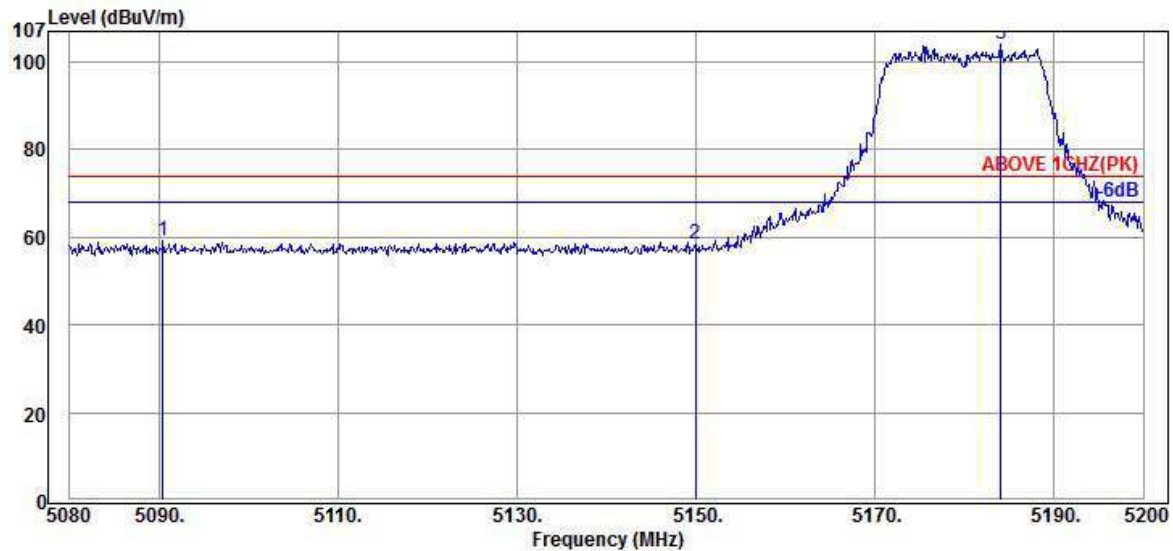

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5090.44	33.35	9.30	50.98	59.09	74.00	14.91	Peak
5149.96	33.44	9.34	50.09	58.32	74.00	15.68	Peak
5184.04	33.49	9.36	95.65	103.95	---	---	Peak

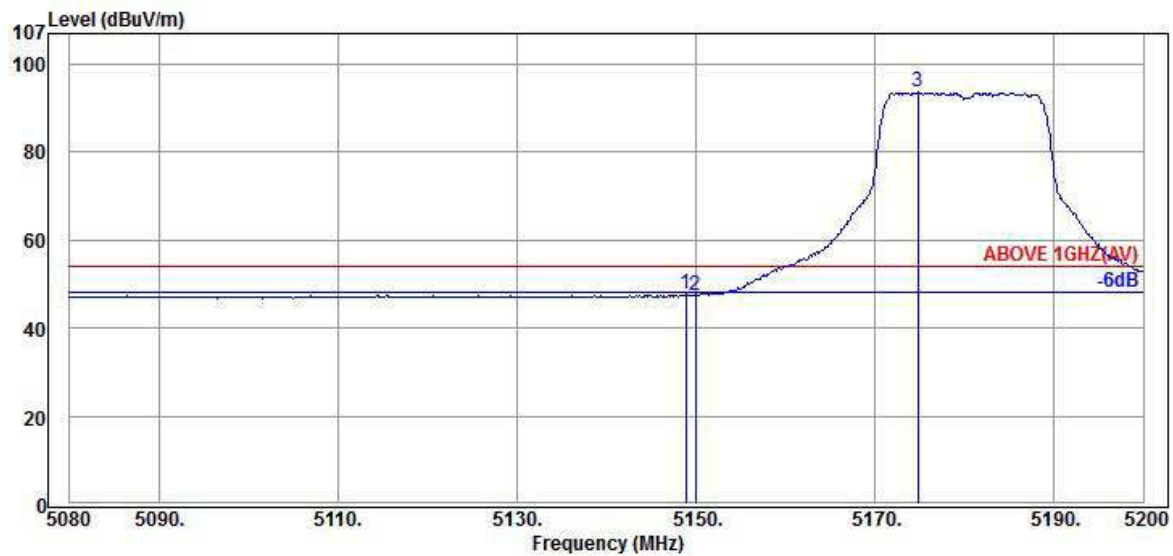


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.88	33.44	9.34	39.47	47.70	54.00	6.30	Average
5149.96	33.44	9.34	39.18	47.41	54.00	6.59	Average
5174.80	33.49	9.36	85.34	93.64	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	II-2A
		Frequency	TX 5320MHz

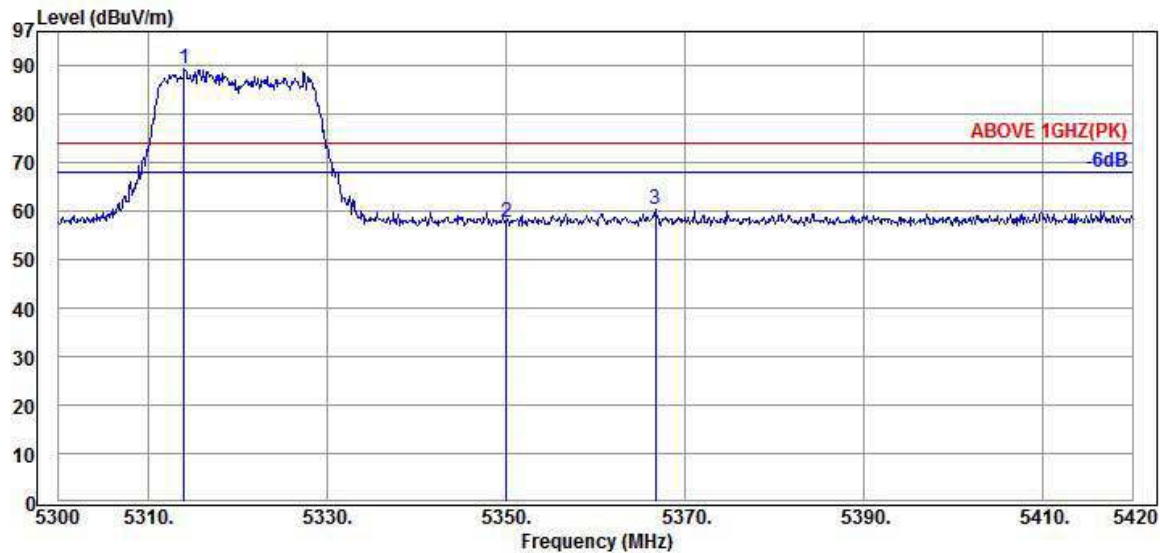

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5314.04	33.71	9.44	80.70	89.29	---	---	Peak
5350.04	33.76	9.46	48.88	57.53	74.00	16.47	Peak
5366.72	33.78	9.47	51.59	60.27	74.00	13.73	Peak

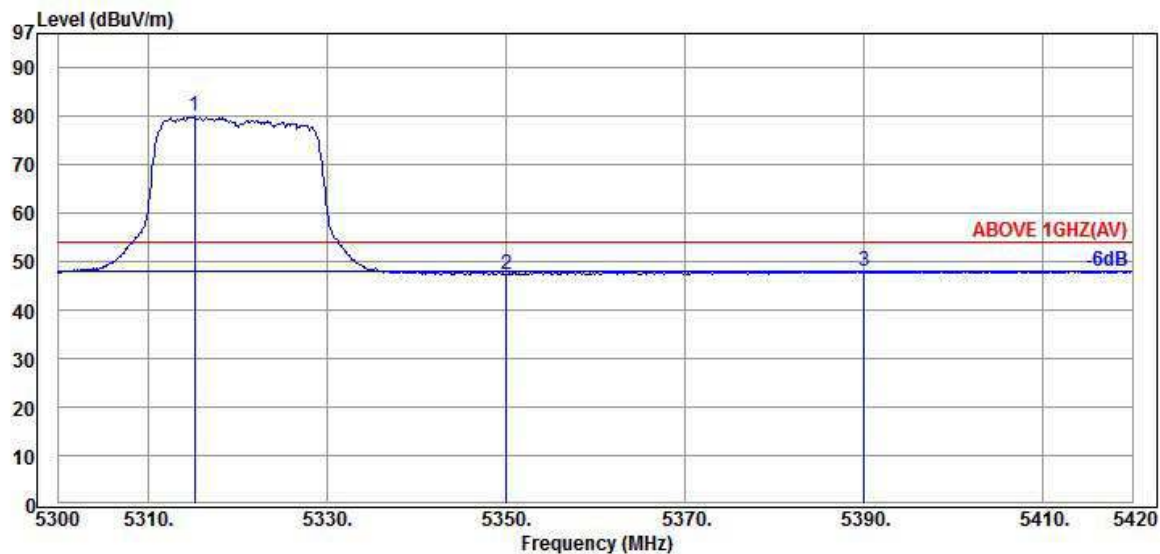

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5315.24	33.71	9.44	71.31	79.90	---	---	Average
5350.04	33.76	9.46	38.79	47.44	54.00	6.56	Average
5390.00	33.83	9.48	39.25	47.99	54.00	6.01	Average

Mode	802.11n-HT20	UNII Band	II-2A
		Frequency	TX 5320MHz

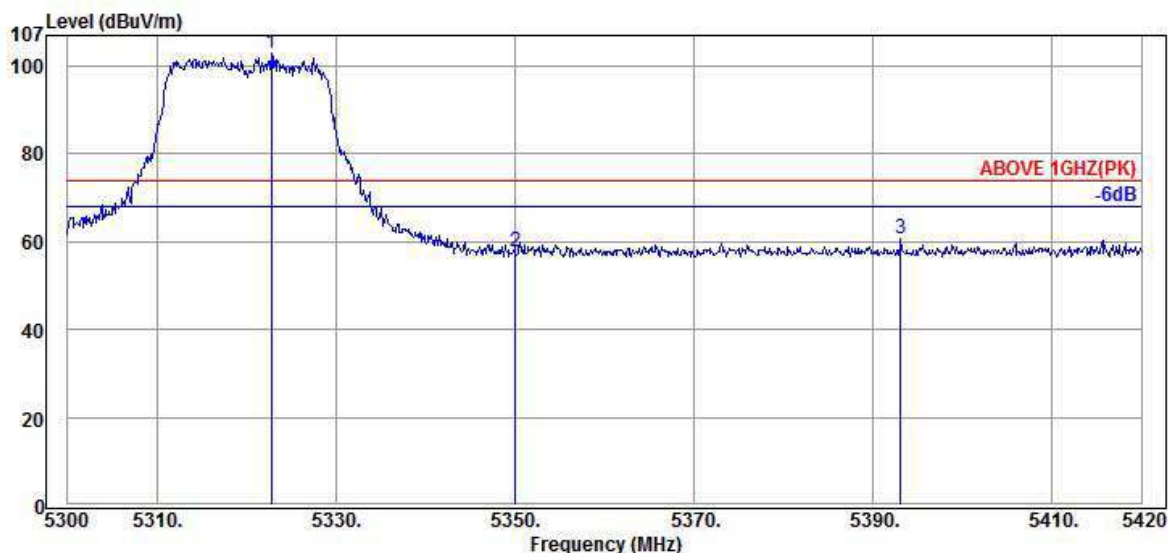

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5322.80	33.71	9.44	94.28	102.87	---	---	Peak
5350.04	33.76	9.46	49.25	57.90	74.00	16.10	Peak
5393.12	33.83	9.49	51.88	60.63	74.00	13.37	Peak

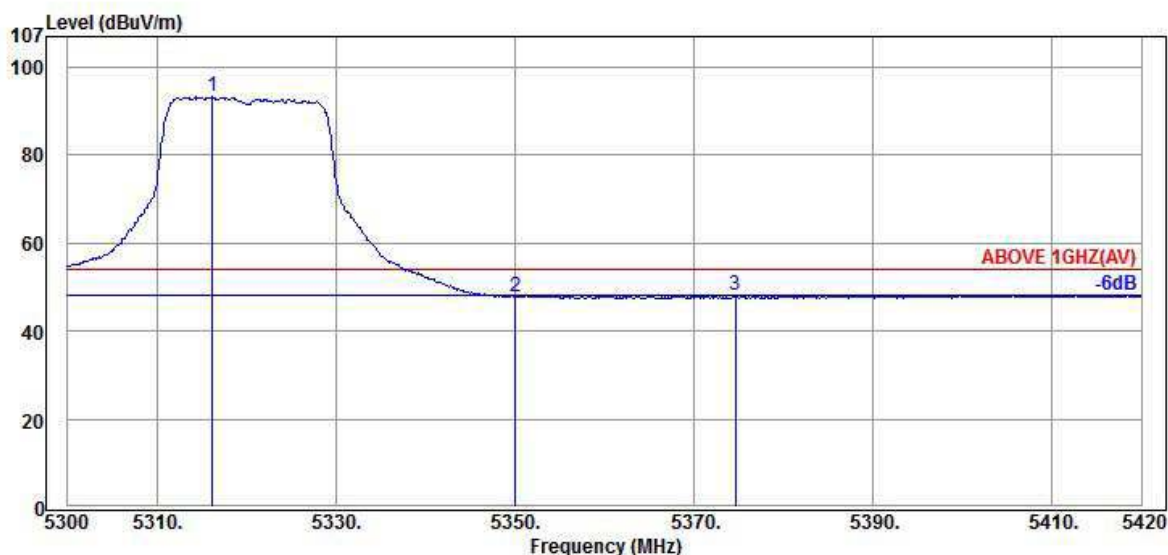


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5316.20	33.71	9.44	84.69	93.28	54.00	---	Average
5350.04	33.76	9.46	39.13	47.78	54.00	6.22	Average
5374.64	33.81	9.47	39.47	48.18	54.00	5.82	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	II-2C
		Frequency	TX 5500MHz

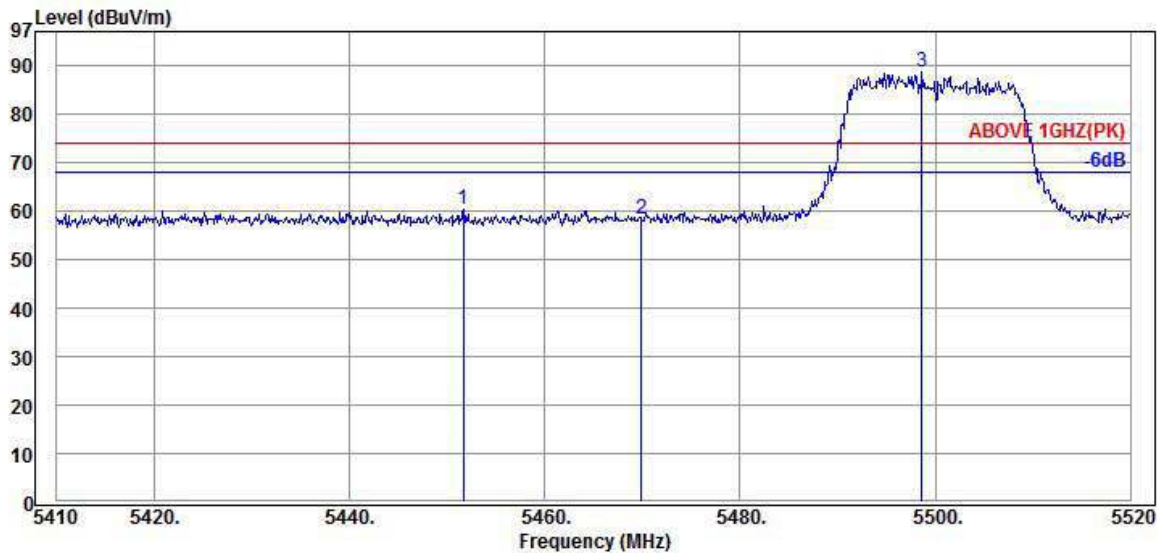

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.69	33.93	9.52	51.53	60.40	74.00	13.60	Peak
5469.95	33.95	9.53	49.50	58.40	74.00	15.60	Peak
5498.66	34.00	9.55	79.82	88.79	---	---	Peak

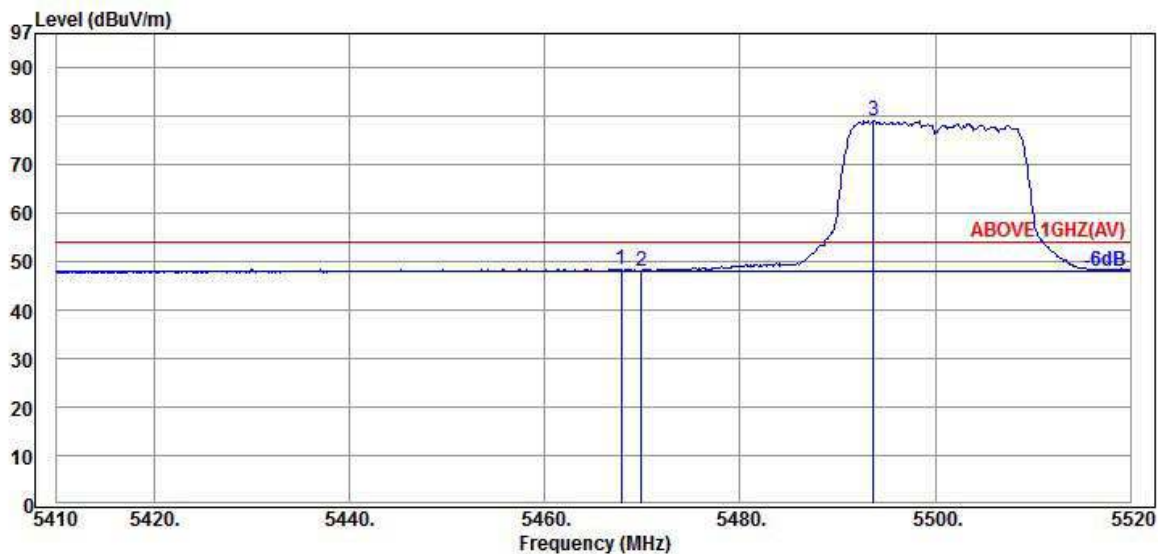


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.86	33.95	9.53	39.56	48.46	54.00	5.54	Average
5469.95	33.95	9.53	39.18	48.08	54.00	5.92	Average
5493.71	33.98	9.55	70.11	79.06	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	II-2C
		Frequency	TX 5500MHz

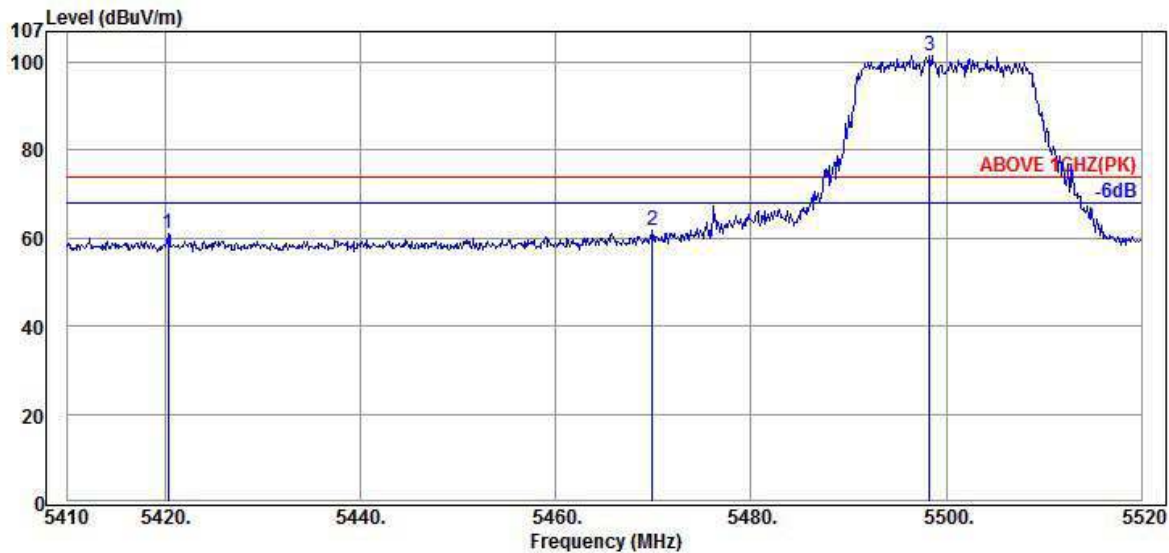

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5420.34	33.88	9.50	52.21	61.02	74.00	12.98	Peak
5469.95	33.95	9.53	52.90	61.80	74.00	12.20	Peak
5498.33	34.00	9.55	92.65	101.62	---	---	Peak

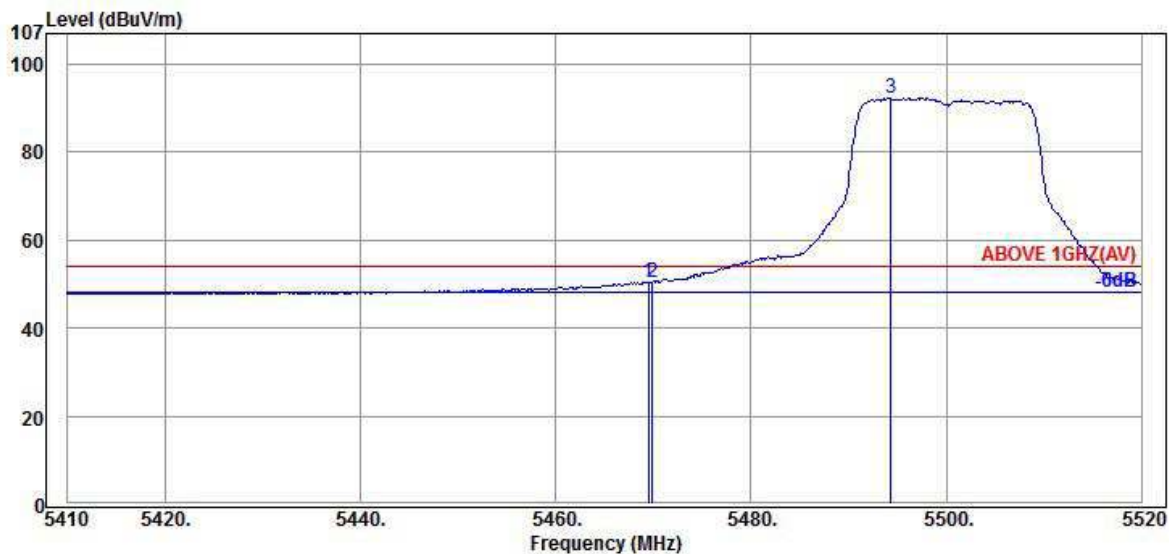


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.51	33.95	9.53	41.48	50.38	54.00	3.62	Average
5469.95	33.95	9.53	41.65	50.55	54.00	3.45	Average
5494.37	33.98	9.55	83.36	92.31	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	II-2C
		Frequency	TX 5700MHz

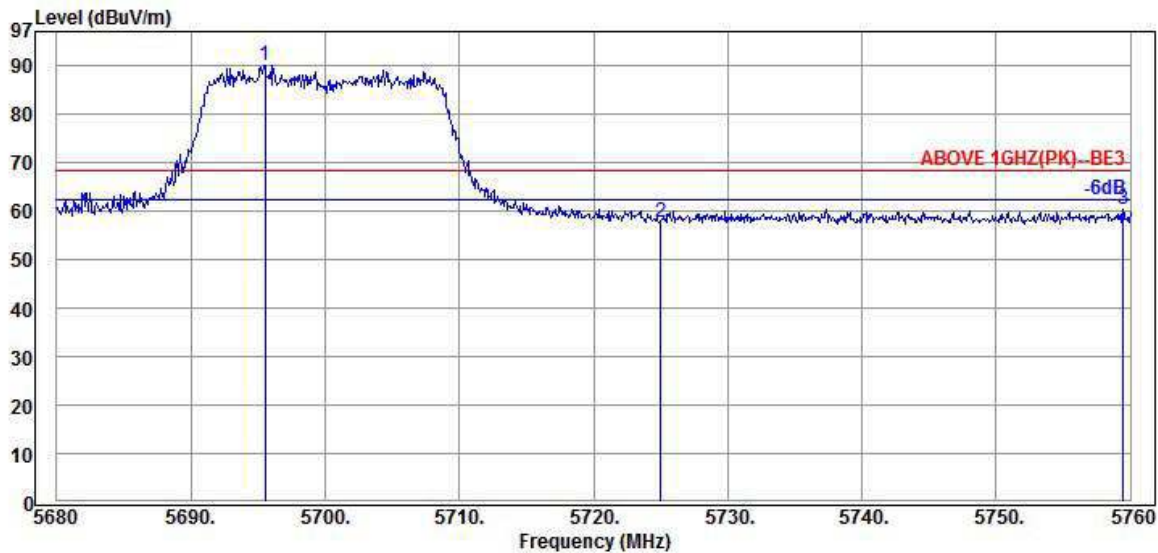

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5695.52	34.04	9.67	80.88	89.99	68.20	---	Peak
5725.04	34.05	9.68	48.49	57.62	68.20	10.58	Peak
5759.44	34.05	9.69	51.20	60.34	68.20	7.86	Peak

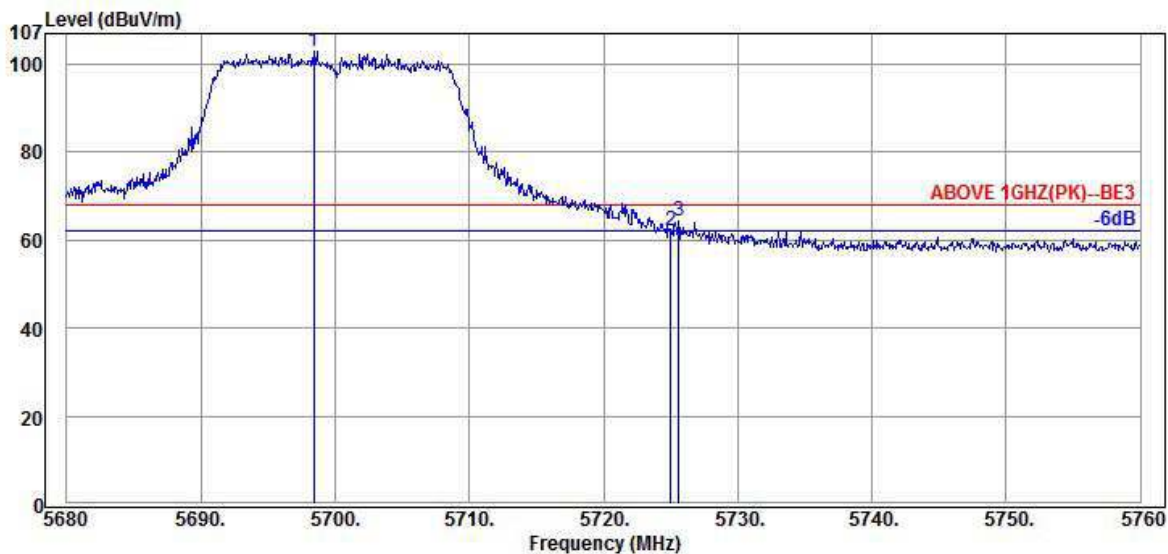


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5698.40	34.04	9.67	94.00	103.11	68.20	---	Peak
5725.04	34.05	9.68	52.87	62.00	68.20	6.20	Peak
5725.60	34.05	9.68	55.17	64.30	68.20	3.90	Peak

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	II-2C
		Frequency	TX 5720MHz

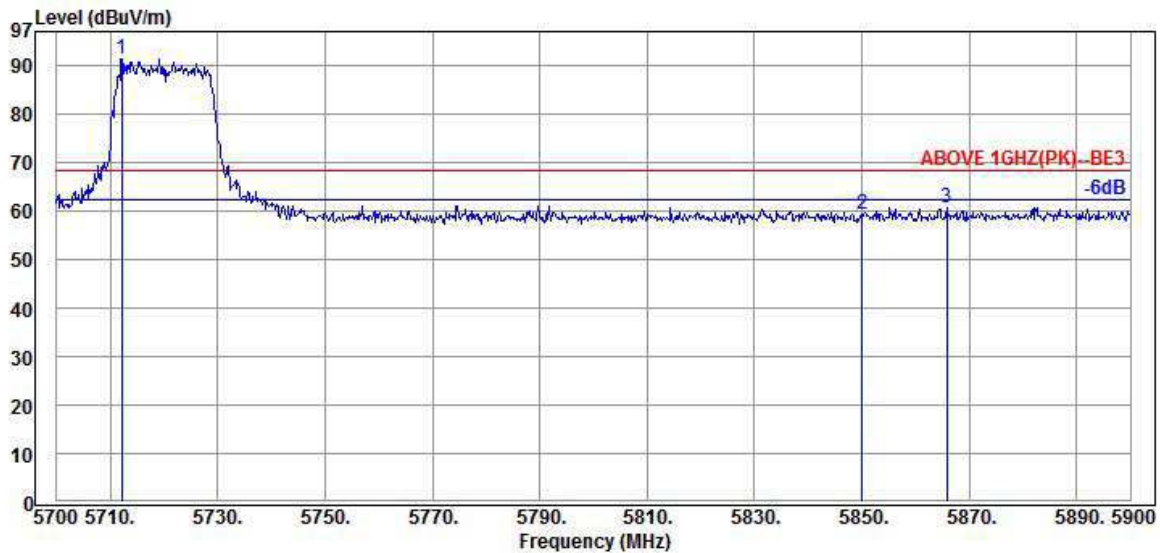

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector
5712.20	34.04	9.68	82.18	91.30	68.20	---	Peak
5850.00	34.07	9.75	50.13	59.34	68.20	8.86	Peak
5865.80	34.07	9.76	51.55	60.77	68.20	7.43	Peak

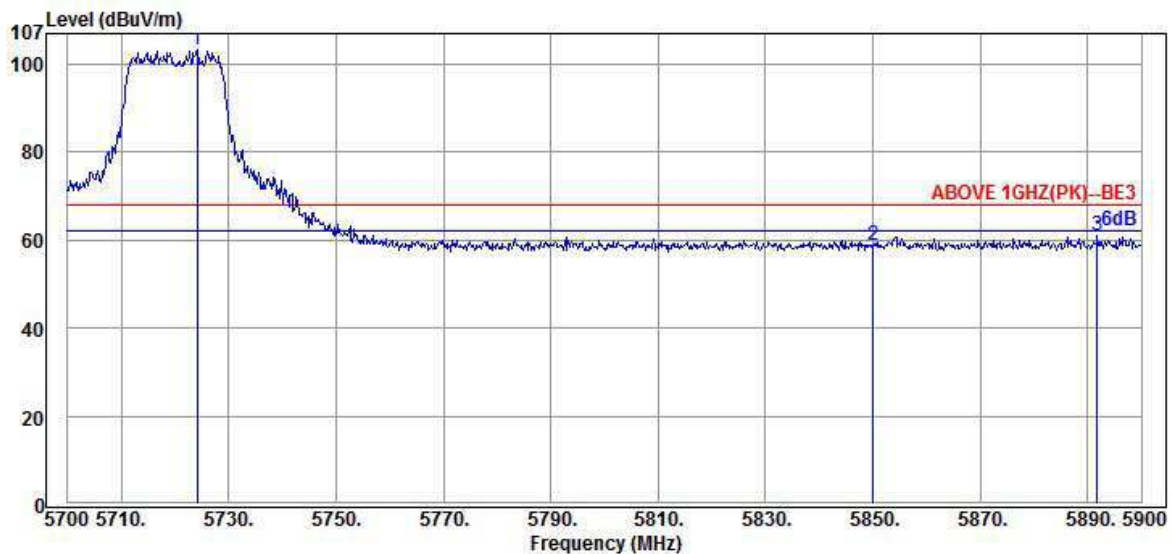

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector
5724.200	34.05	9.68	94.29	103.42	68.20	---	Peak
5850.00	34.07	9.75	49.49	58.70	68.20	9.50	Peak
5891.80	34.08	9.77	51.67	60.91	68.20	7.29	Peak

Mode	802.11n-HT40	UNII Band	I
		Frequency	TX 5190MHz

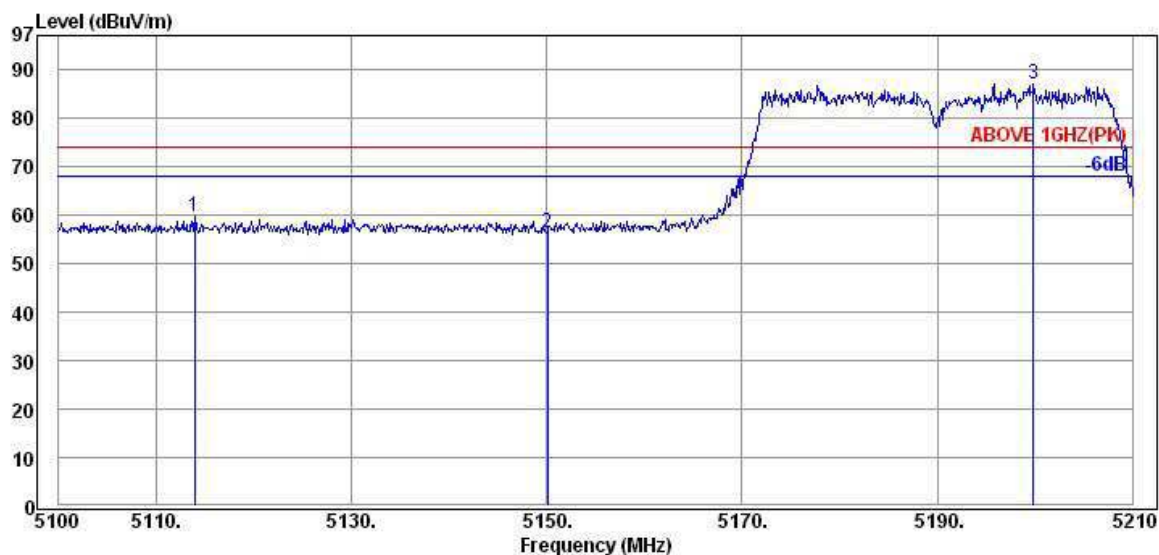

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5113.97	33.39	9.32	51.43	59.60	74.00	14.40	Peak
5150.05	33.44	9.34	48.23	56.46	74.00	17.54	Peak
5199.88	33.52	9.37	78.81	87.15	---	---	Peak

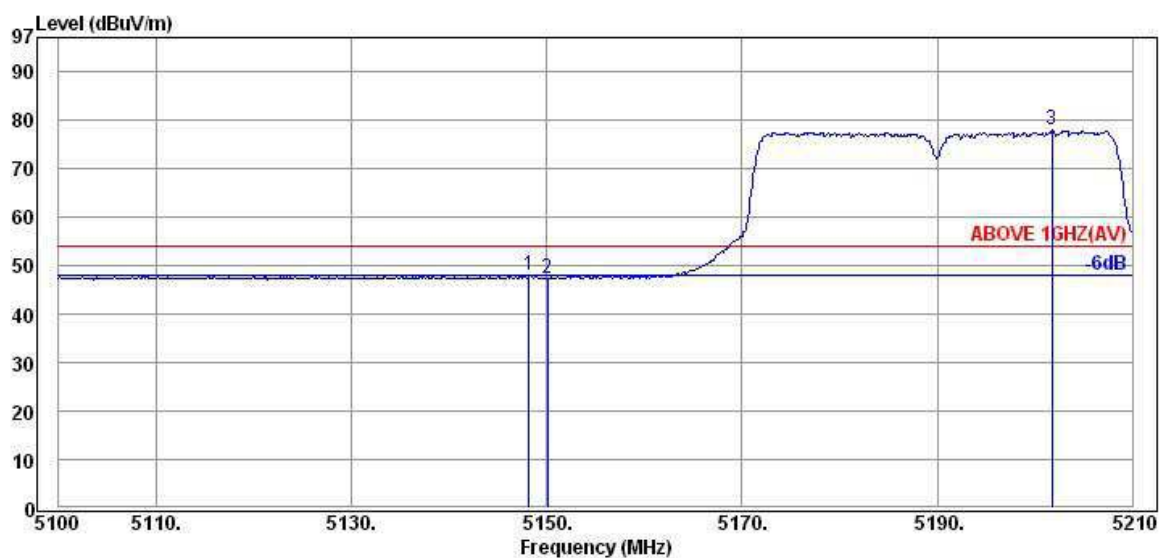


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.18	33.44	9.34	39.68	47.91	54.00	6.09	Average
5150.05	33.44	9.34	39.14	47.37	54.00	6.63	Average
5201.75	33.54	9.37	69.59	77.95	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	I
		Frequency	TX 5190MHz

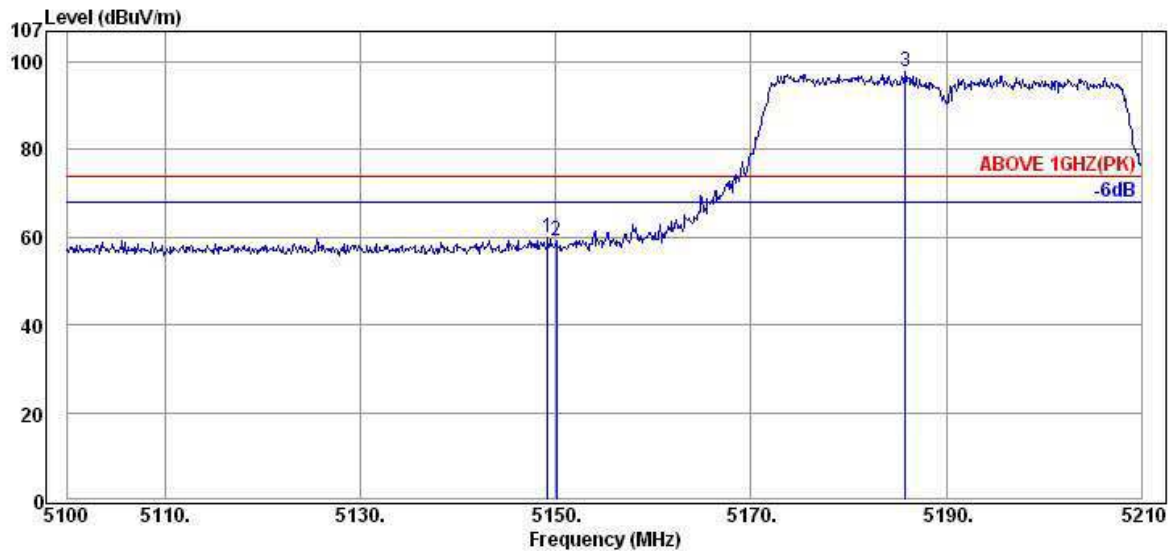

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector
5149.17	33.44	9.34	51.67	59.90	74.00	14.10	Peak
5150.05	33.44	9.34	50.88	59.11	74.00	14.89	Peak
5185.80	33.49	9.36	89.52	97.82	---	---	Peak

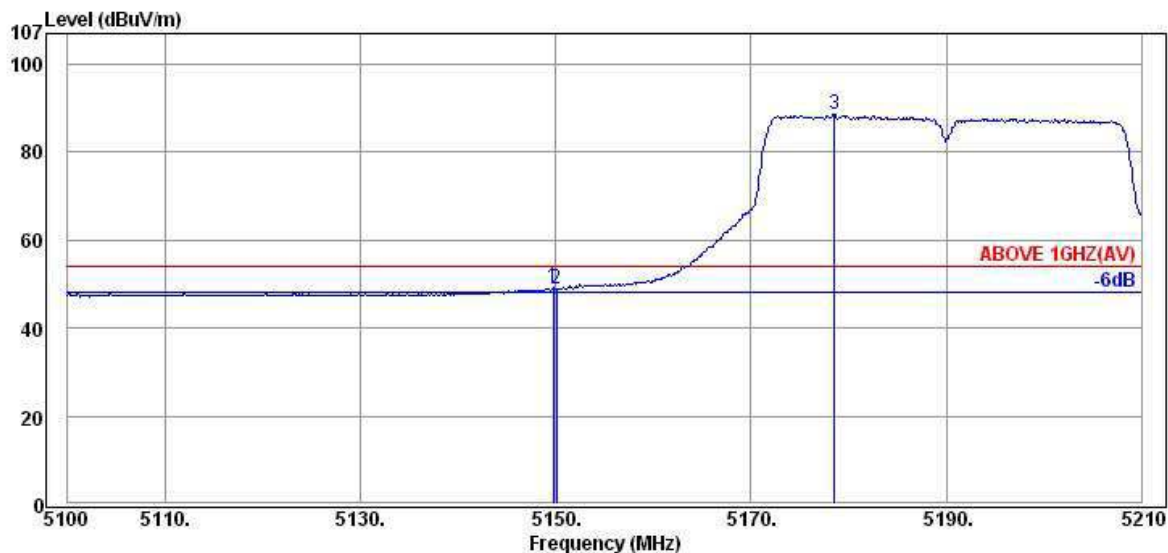


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector
5149.72	33.44	9.34	40.87	49.10	54.00	4.90	Average
5150.05	33.44	9.34	40.51	48.74	54.00	5.26	Average
5178.54	33.49	9.36	80.31	88.61	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	II-2A
		Frequency	TX 5310MHz

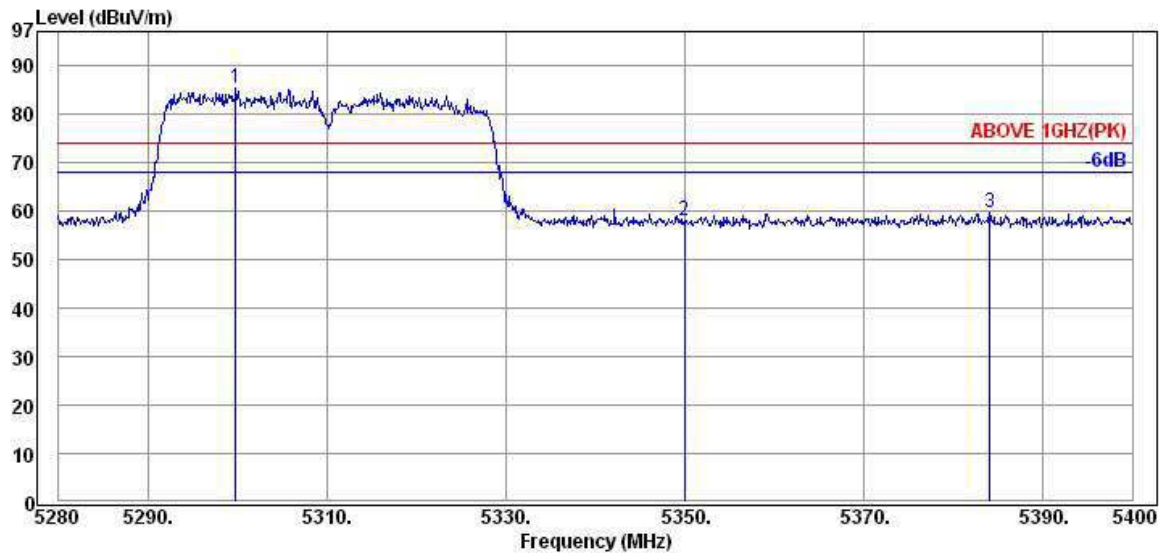

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5299.80	33.68	9.43	76.70	85.25	---	---	Peak
5349.96	33.76	9.46	49.48	58.13	74.00	15.87	Peak
5384.04	33.81	9.48	50.86	59.58	74.00	14.42	Peak

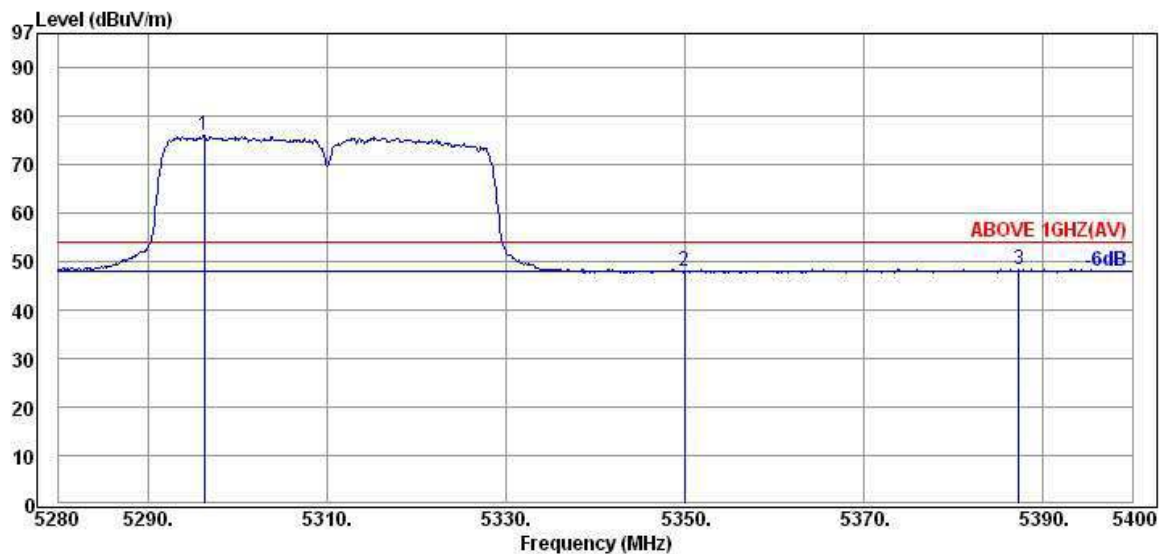


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5296.32	33.68	9.42	67.44	75.98	---	---	Average
5349.96	33.76	9.46	39.31	47.96	54.00	6.04	Average
5387.28	33.83	9.48	39.65	48.39	54.00	5.61	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	II-2A
		Frequency	TX 5310MHz

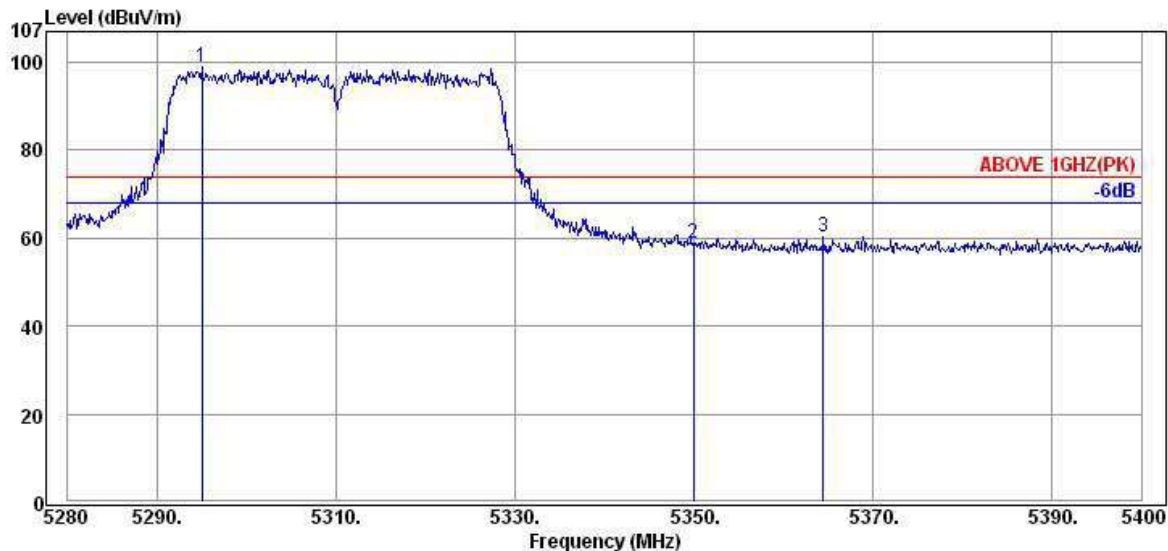

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5295.00	33.68	9.42	90.42	98.96	---	---	Peak
5349.96	33.76	9.46	50.21	58.86	74.00	15.14	Peak
5364.48	33.78	9.47	51.64	60.32	74.00	13.68	Peak

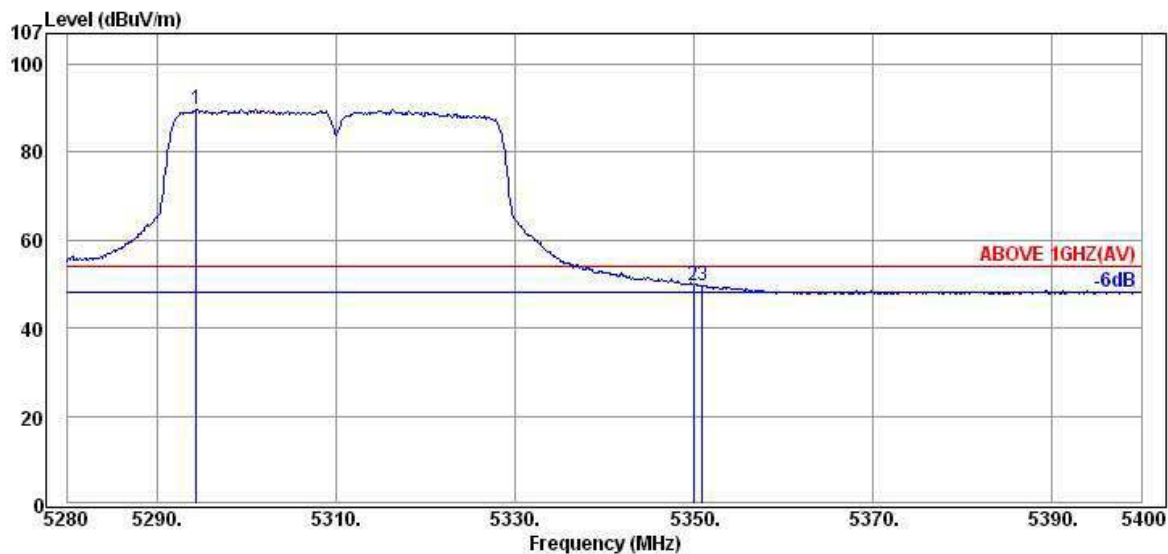


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5294.40	33.68	9.42	81.21	89.75	---	---	Average
5349.96	33.76	9.46	40.91	49.56	54.00	4.44	Average
5350.92	33.76	9.46	41.08	49.73	54.00	4.27	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	II-2C
		Frequency	TX 5510MHz

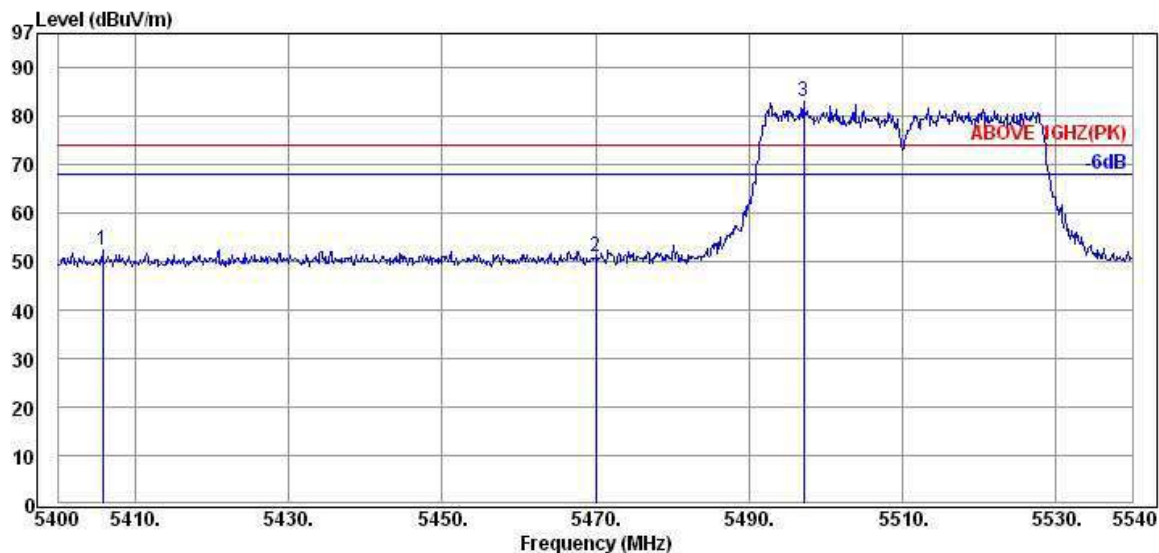

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5405.74	33.85	9.49	43.60	52.37	74.00	21.63	Peak
5470.00	33.95	9.53	41.99	50.89	74.00	23.11	Peak
5497.16	34.00	9.55	74.13	83.10	---	---	Peak

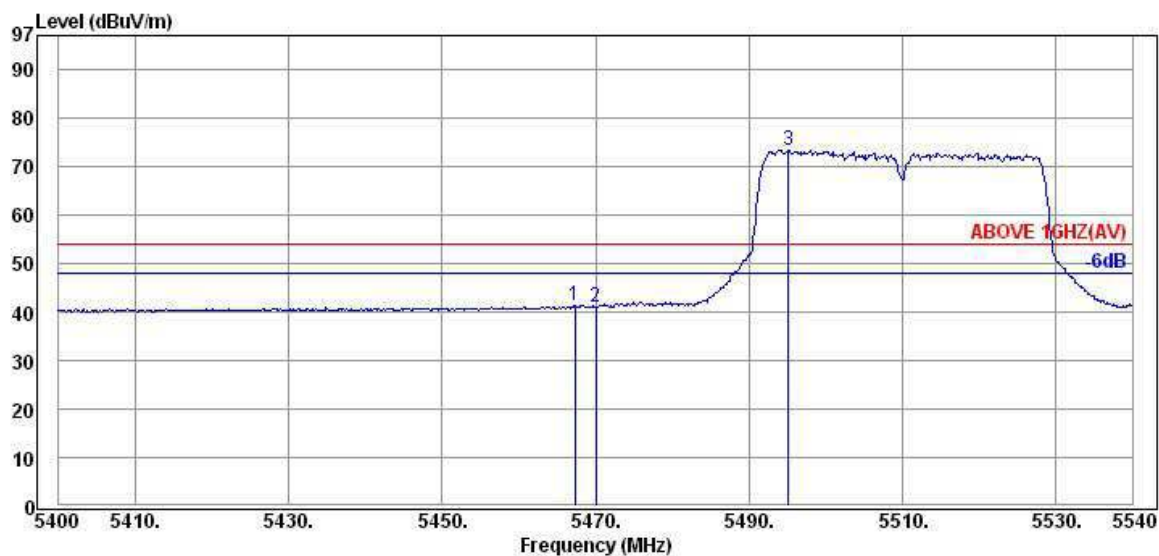


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.34	33.95	9.53	32.53	41.43	54.00	12.57	Average
5470.00	33.95	9.53	32.16	41.06	54.00	12.94	Average
5495.20	34.00	9.55	64.52	73.49	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	II-2C
		Frequency	TX 5510MHz

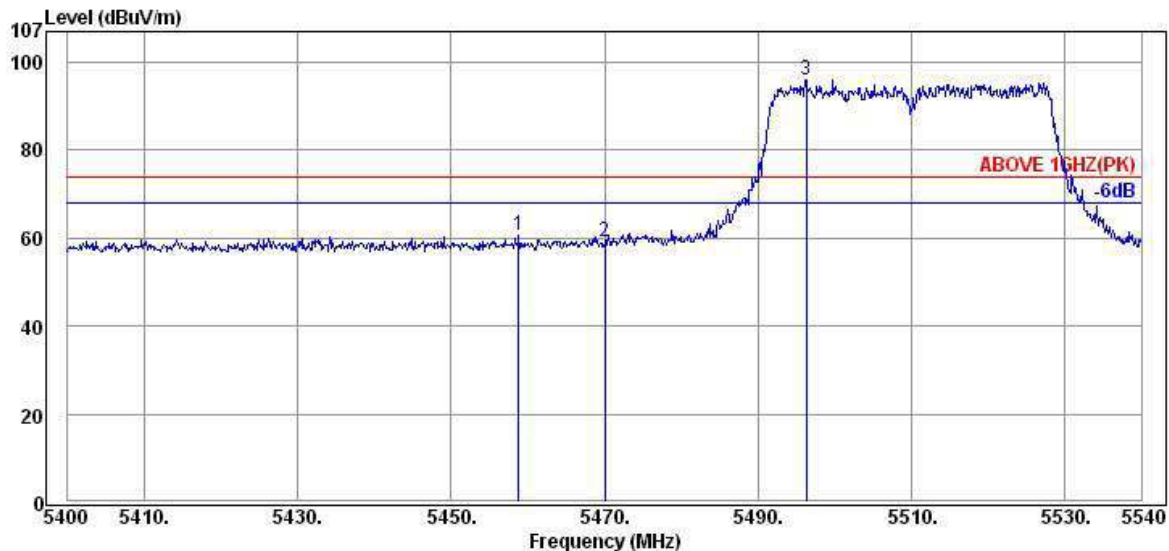

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.80	33.93	9.53	51.74	60.62	74.00	13.38	Peak
5470.00	33.95	9.53	50.35	59.25	74.00	14.75	Peak
5496.32	34.00	9.55	87.07	96.04	---	---	Peak

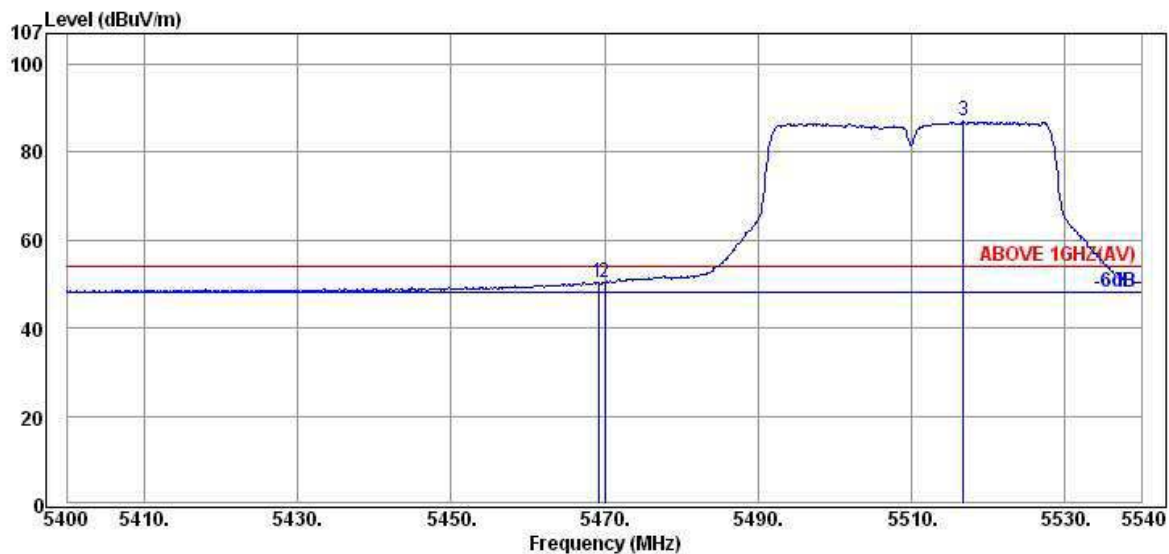


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.16	33.95	9.53	41.50	50.40	54.00	3.60	Average
5470.00	33.95	9.53	41.45	50.35	54.00	3.65	Average
5516.76	34.00	9.56	77.99	86.97	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	II-2C
		Frequency	TX 5670MHz

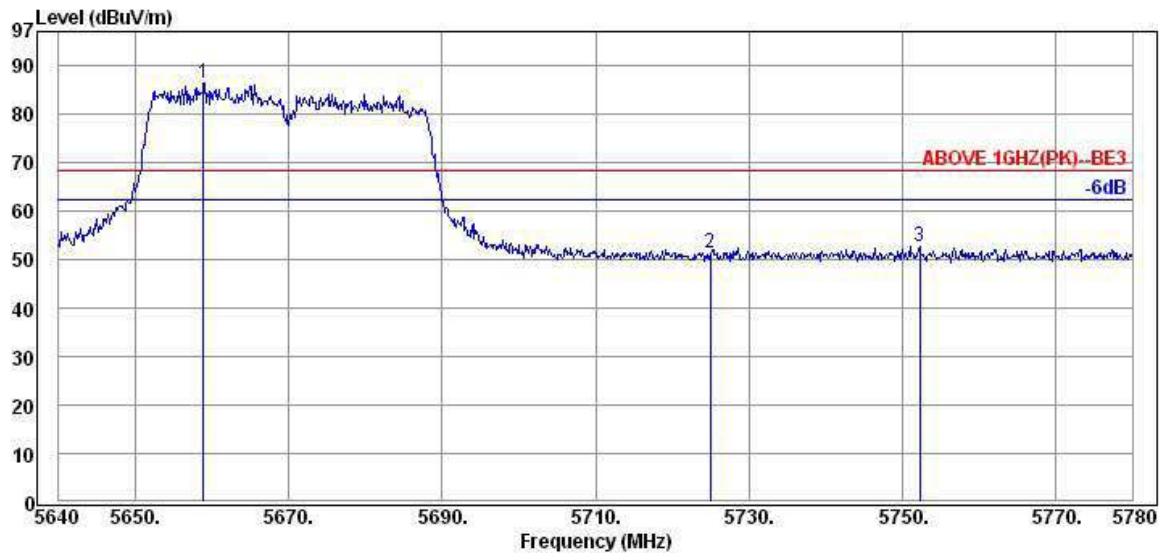

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5658.90	34.03	9.65	77.10	86.19	68.20	---	Peak
5724.98	34.05	9.68	42.20	51.33	68.20	16.87	Peak
5752.28	34.05	9.69	43.49	52.63	68.20	15.57	Peak

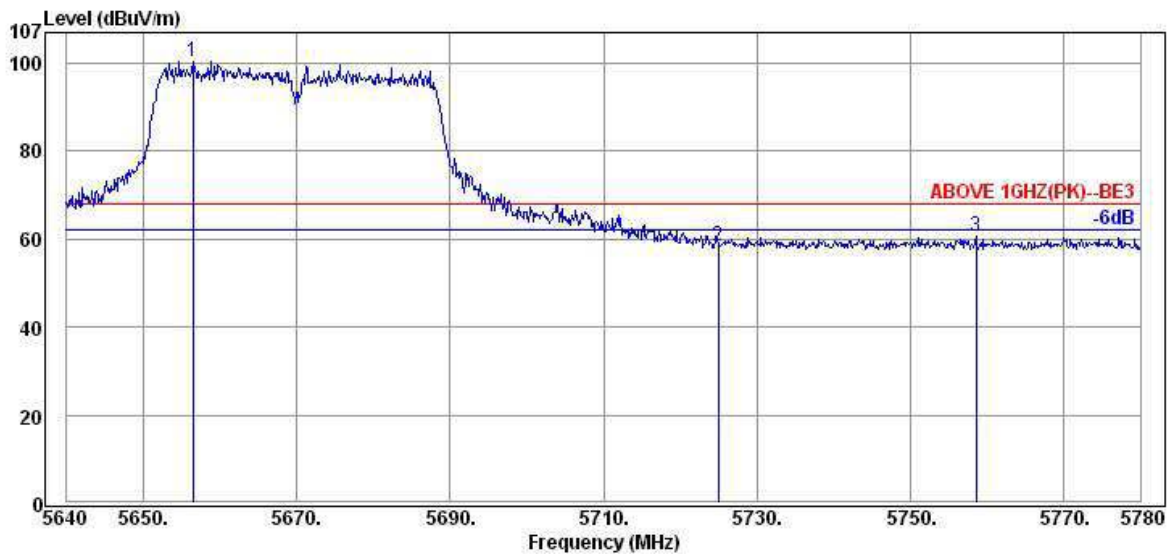


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5656.52	34.03	9.64	91.48	100.56	68.20	---	Peak
5724.98	34.05	9.68	49.38	58.51	68.20	9.69	Peak
5758.58	34.05	9.69	51.49	60.63	68.20	7.57	Peak

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	II-2C
		Frequency	TX 5710MHz

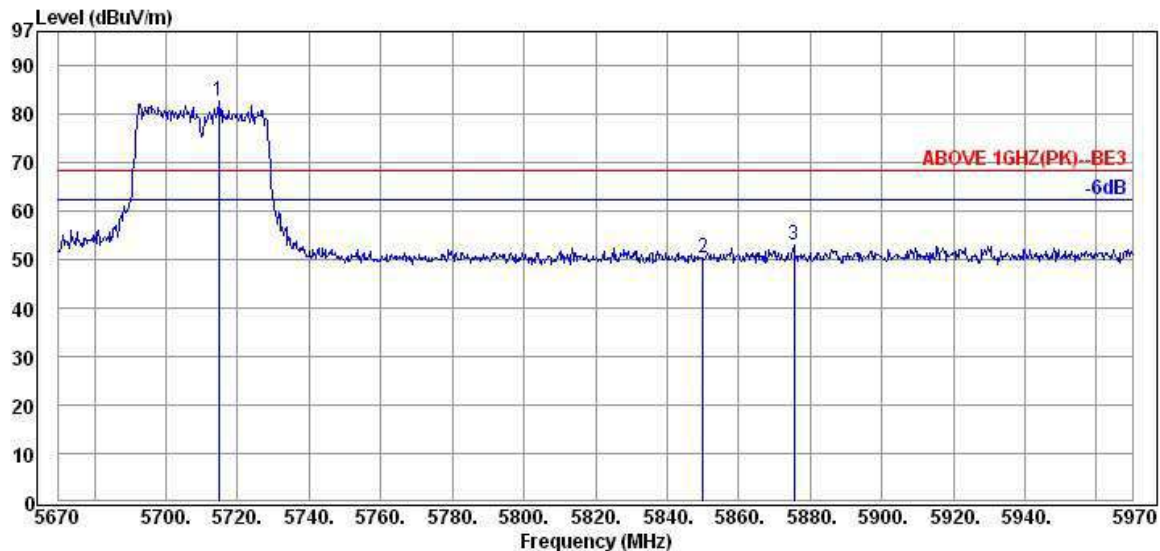

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5714.70	34.04	9.68	73.47	82.59	68.20	---	Peak
5850.00	34.07	9.75	40.98	50.19	68.20	18.01	Peak
5875.50	34.08	9.76	43.67	52.90	68.20	15.30	Peak

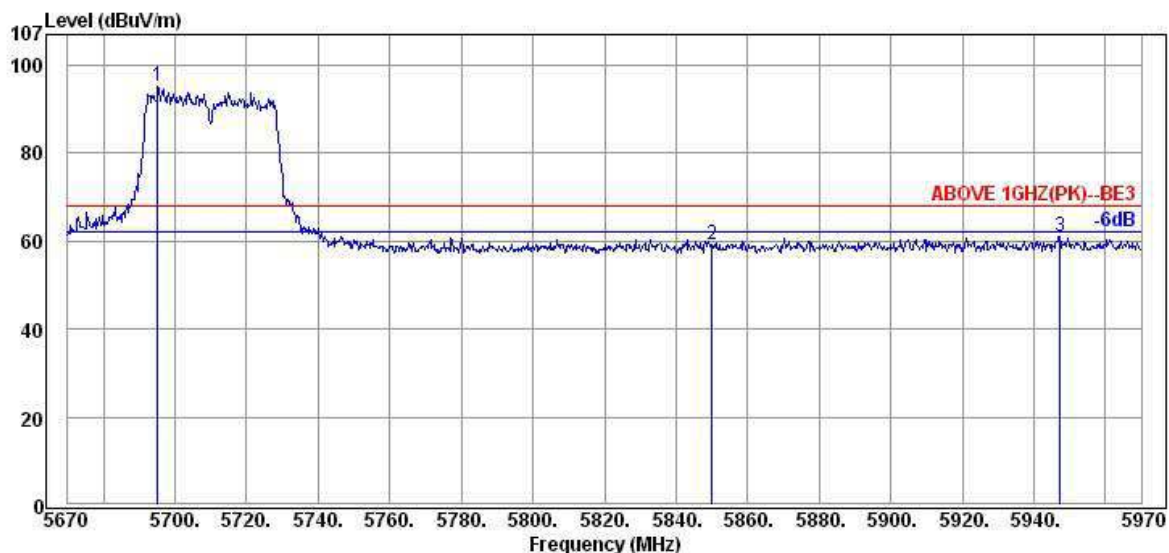


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5695.20	34.04	9.67	86.29	95.40	68.20	---	Peak
5850.00	34.07	9.75	49.99	59.20	68.20	9.00	Peak
5947.20	34.09	9.80	51.92	61.19	68.20	7.01	Peak

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	UNII Band	I
		Frequency	TX 5210MHz

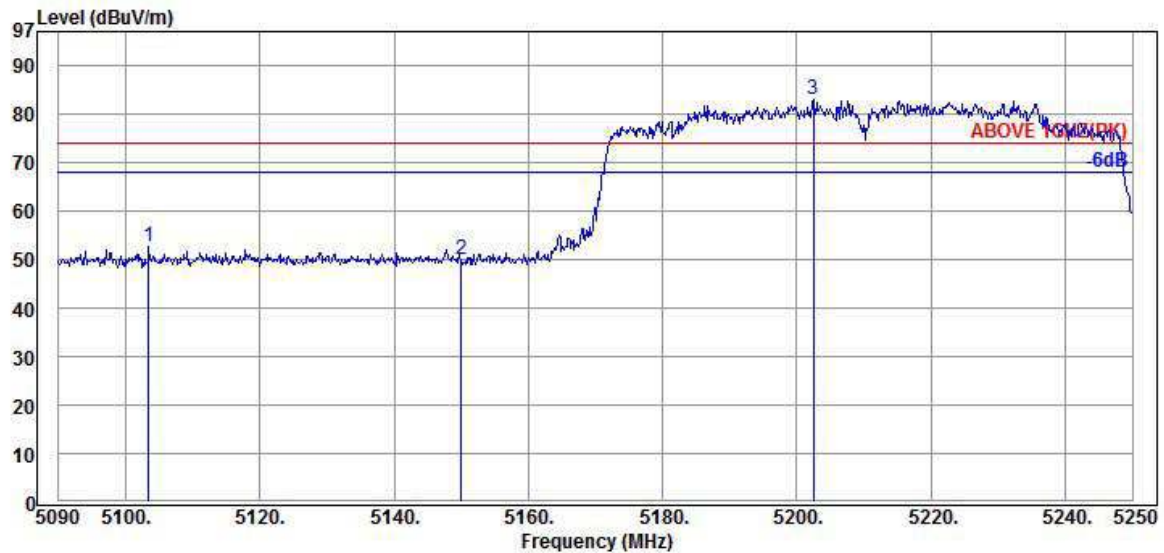

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5103.44	33.37	9.31	9.86	52.54	74.00	21.46	Peak
5150.00	33.44	9.34	7.07	49.85	74.00	24.15	Peak
5202.48	33.54	9.37	40.14	83.05	---	---	Peak

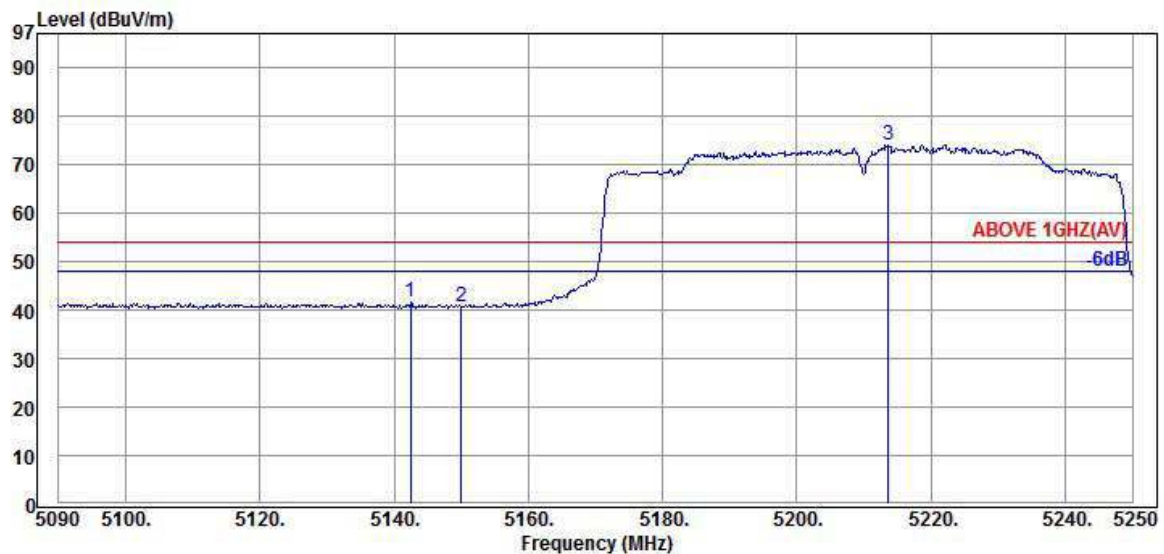

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.48	33.44	9.34	-1.22	41.56	54.00	12.44	Average
5150.00	33.44	9.34	-2.20	40.58	54.00	13.42	Average
5213.68	33.54	9.38	31.18	74.10	---	---	Average

Mode	802.11ac-VHT80	UNII Band	I
		Frequency	TX 5210MHz

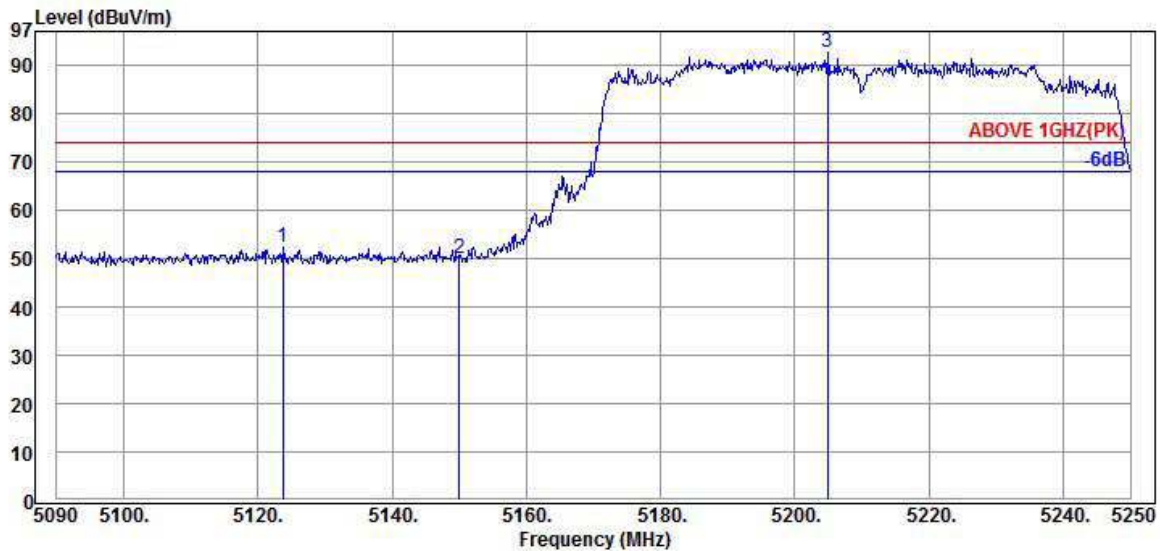

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5123.76	33.39	9.32	9.78	52.49	74.00	21.51	Peak
5150.00	33.44	9.34	7.32	50.10	74.00	23.90	Peak
5204.88	33.54	9.38	49.85	92.77	---	---	Peak

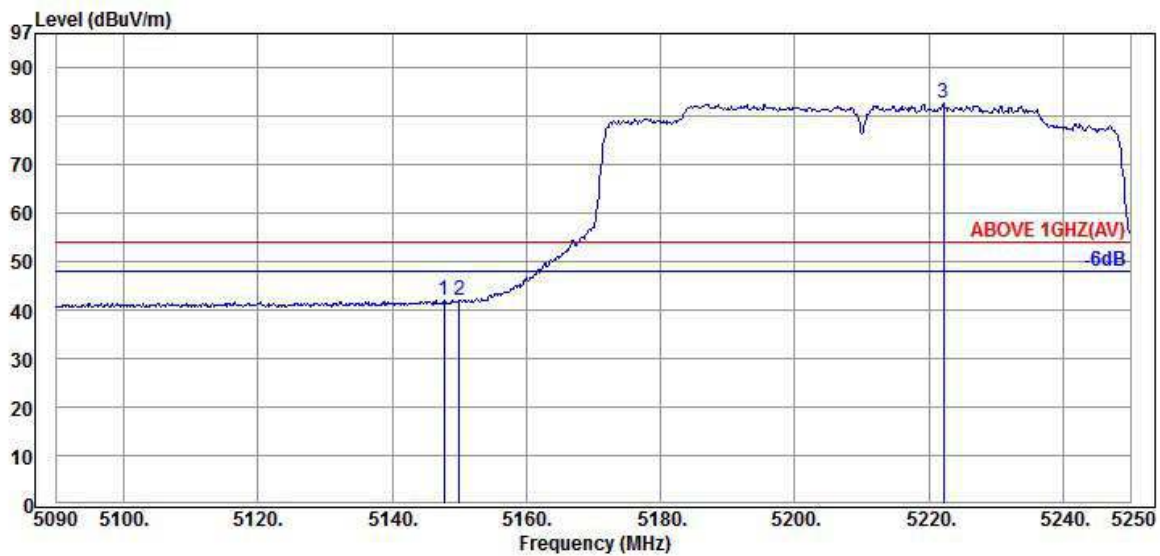


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.76	33.44	9.34	-0.62	42.16	54.00	11.84	Average
5150.00	33.44	9.34	-0.66	42.12	54.00	11.88	Average
5222.16	33.56	9.39	39.57	82.52	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	UNII Band	II-2A
		Frequency	TX 5290MHz

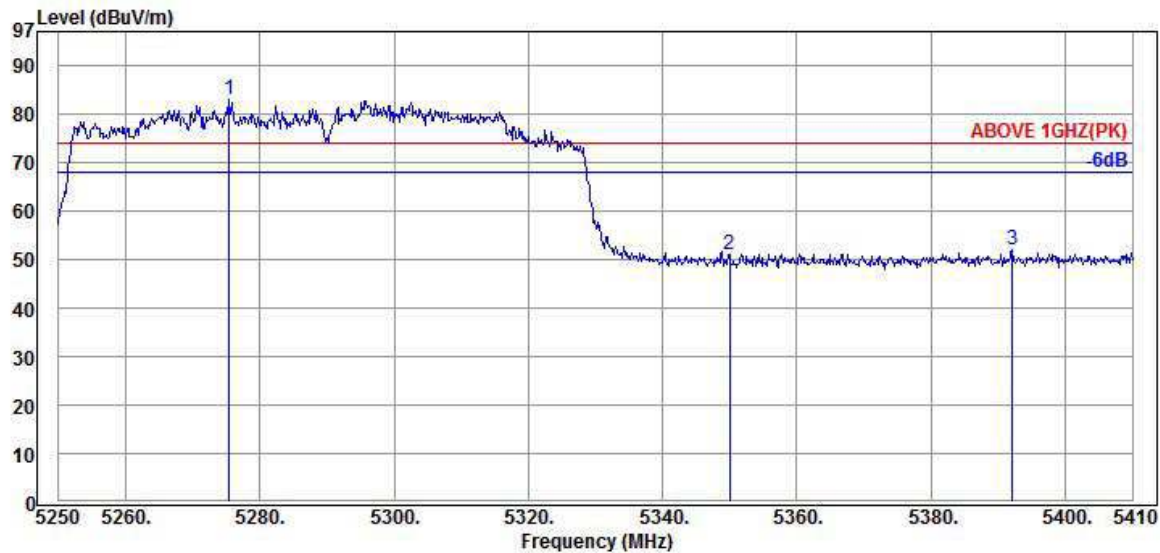

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5275.44	33.64	9.41	39.81	82.86	---	---	Peak
5350.00	33.76	9.46	7.89	51.11	74.00	22.89	Peak
5392.08	33.83	9.48	8.82	52.13	74.00	21.87	Peak

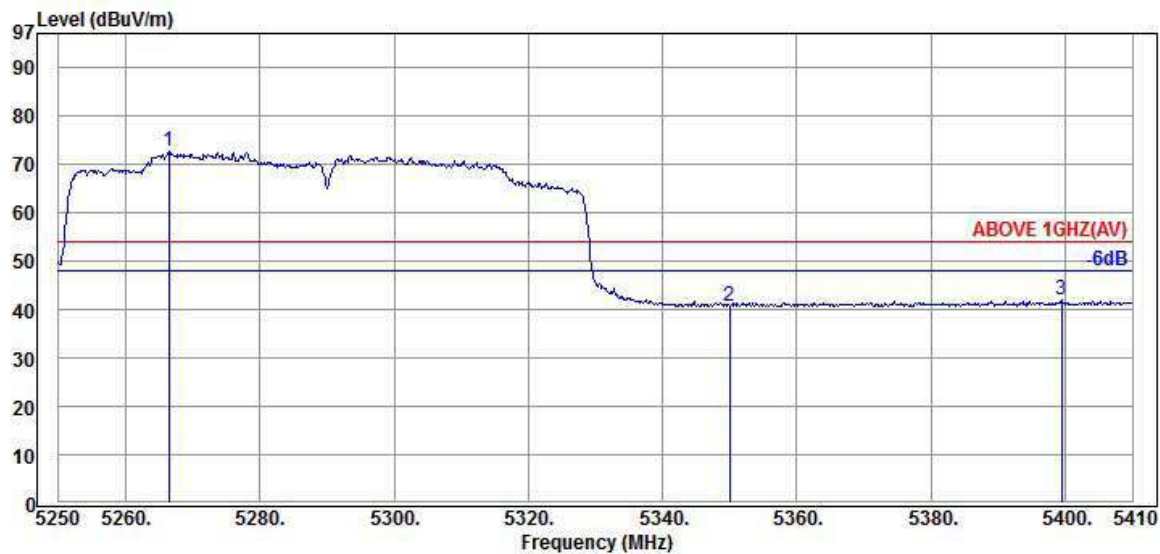


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5266.48	33.64	9.41	29.51	72.56	---	---	Average
5350.00	33.76	9.46	-2.46	40.76	54.00	13.24	Average
5399.44	33.83	9.49	-1.44	41.88	54.00	12.12	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	UNII Band	II-2A
		Frequency	TX 5290MHz

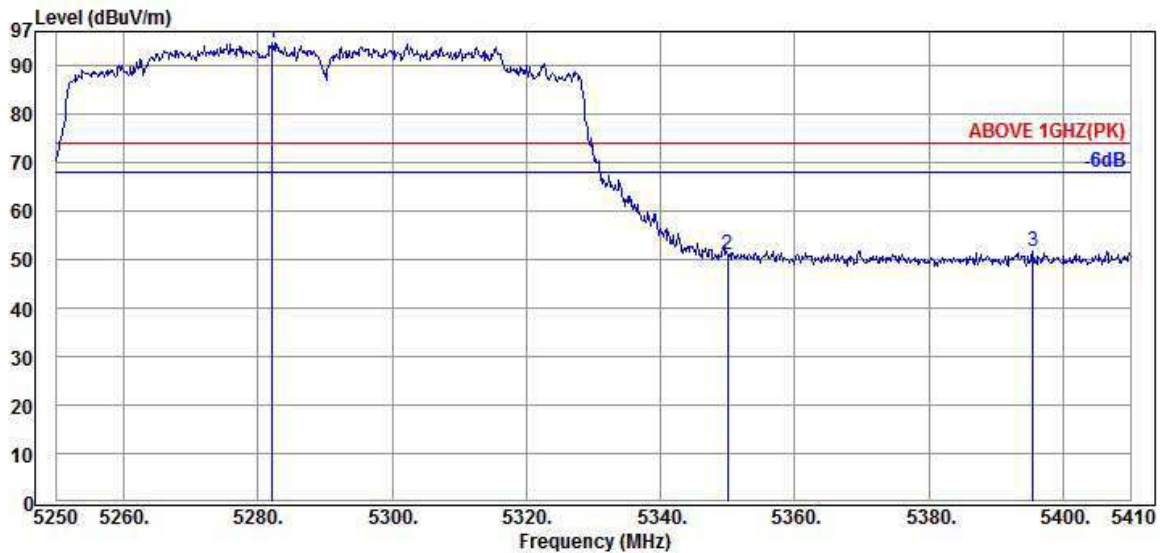

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5282.16	33.66	9.42	51.61	94.69	---	---	Peak
5350.00	33.76	9.46	7.74	50.96	74.00	23.04	Peak
5395.44	33.83	9.49	8.43	51.75	74.00	22.25	Peak

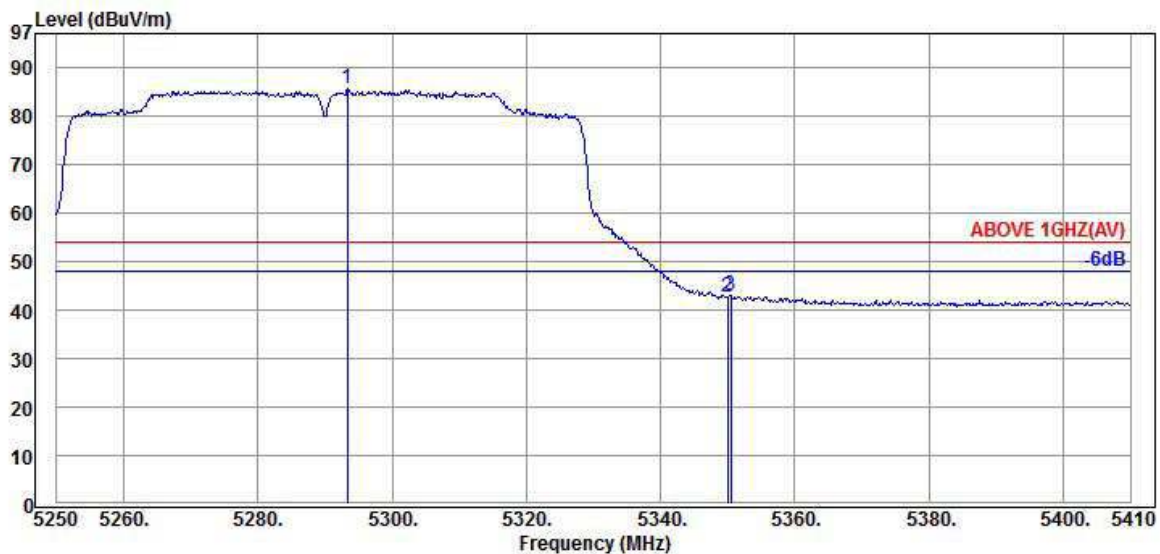


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5293.36	33.68	9.42	42.52	85.62	---	---	Average
5350.00	33.76	9.46	-0.72	42.50	54.00	11.50	Average
5350.48	33.76	9.46	-0.31	42.91	54.00	11.09	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	UNII Band	II-2C
		Frequency	TX 5530MHz

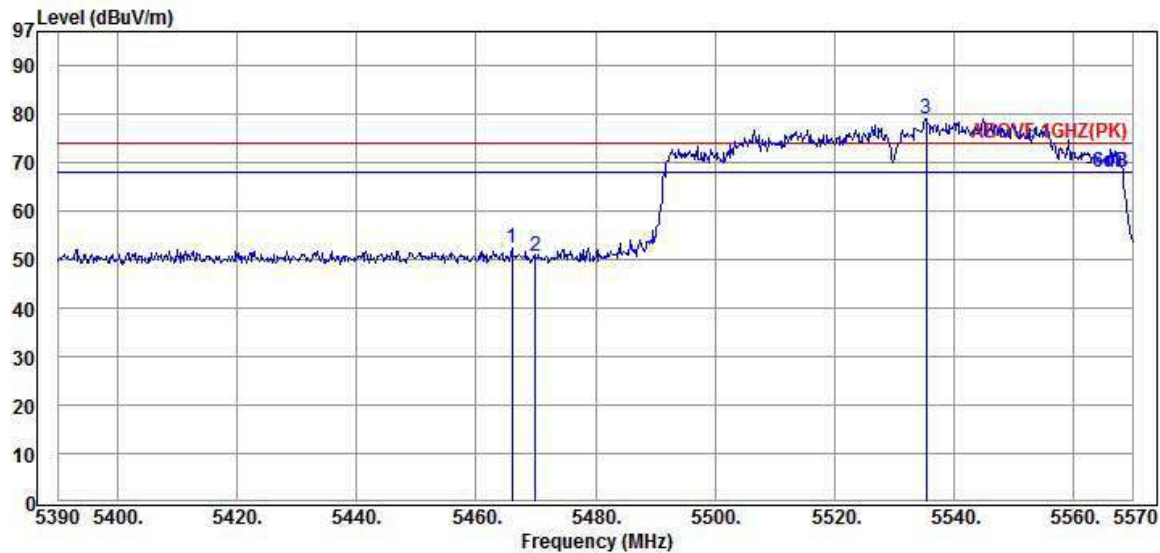

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.96	33.95	9.53	9.00	52.48	74.00	21.52	Peak
5469.92	33.95	9.53	7.26	50.74	74.00	23.26	Peak
5535.44	34.01	9.57	35.48	79.06	---	---	Peak

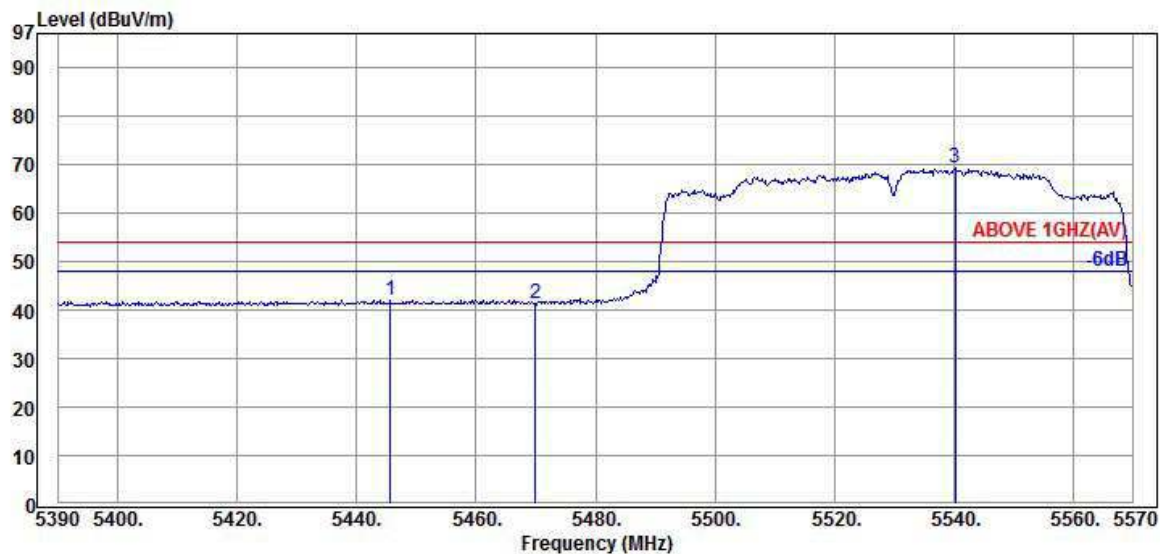


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5445.62	33.90	9.52	-1.28	42.14	54.00	11.86	Average
5469.92	33.95	9.53	-2.07	41.41	54.00	12.59	Average
5540.30	34.01	9.57	25.64	69.22	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	UNII Band	II-2C
		Frequency	TX 5530MHz

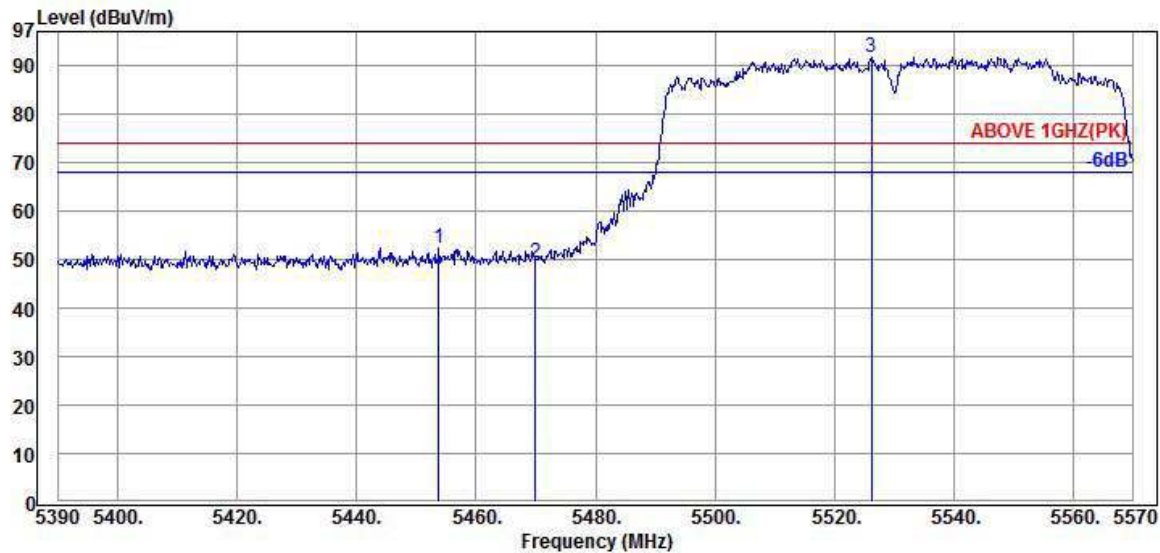

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.72	33.93	9.52	8.87	52.32	74.00	21.68	Peak
5469.92	33.95	9.53	5.87	49.35	74.00	24.65	Peak
5526.26	34.00	9.57	48.17	91.74	---	---	Peak

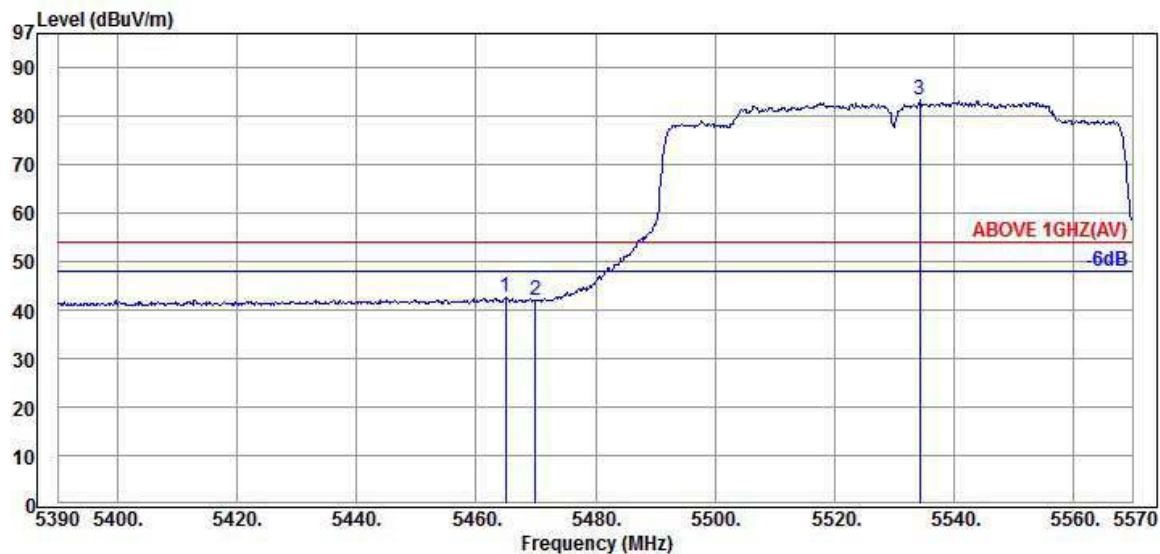


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.88	33.95	9.53	-0.96	42.52	54.00	11.48	Average
5469.92	33.95	9.53	-1.62	41.86	54.00	12.14	Average
5534.36	34.01	9.57	39.70	83.28	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	UNII Band	II-2C
		Frequency	TX 5690MHz

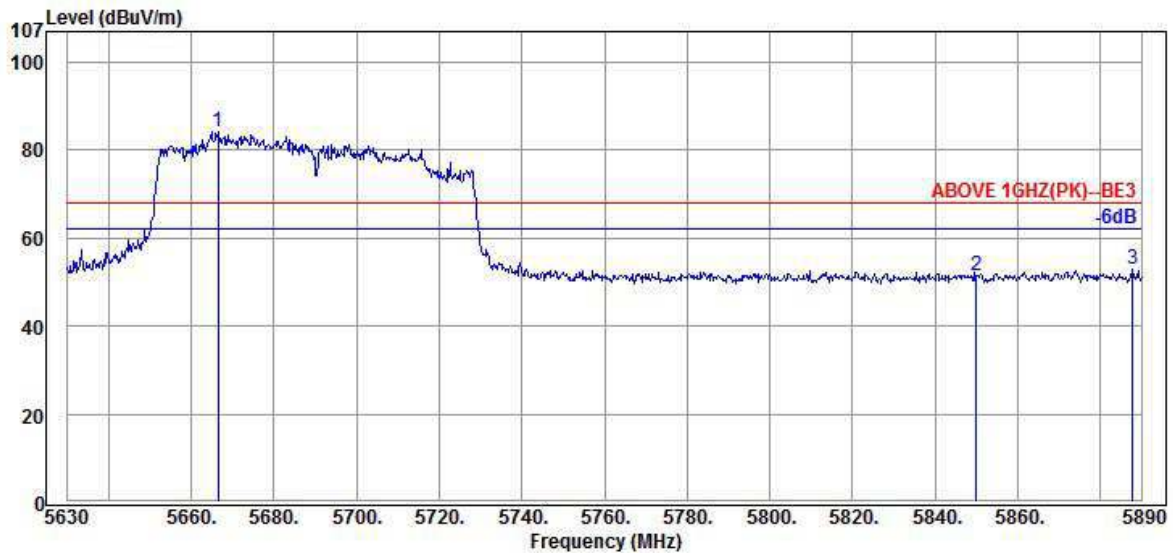

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5666.40	34.03	9.65	40.43	84.11	68.20	---	Peak
5849.96	34.07	9.75	7.50	51.32	68.20	16.88	Peak
5887.92	34.08	9.77	9.22	53.07	68.20	15.13	Peak

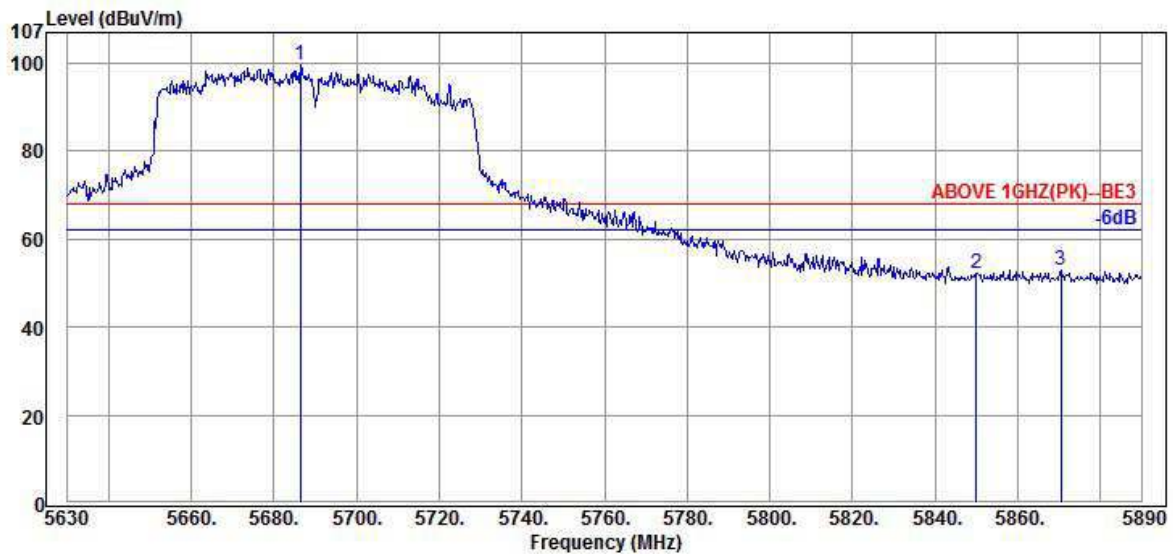

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5686.42	34.04	9.66	56.13	99.83	68.20	---	Peak
5849.96	34.07	9.75	8.37	52.19	68.20	16.01	Peak
5870.50	34.07	9.76	9.11	52.94	68.20	15.26	Peak

Mode	802.11ac-VHT160	UNII Band	I
		Frequency	TX 5250MHz

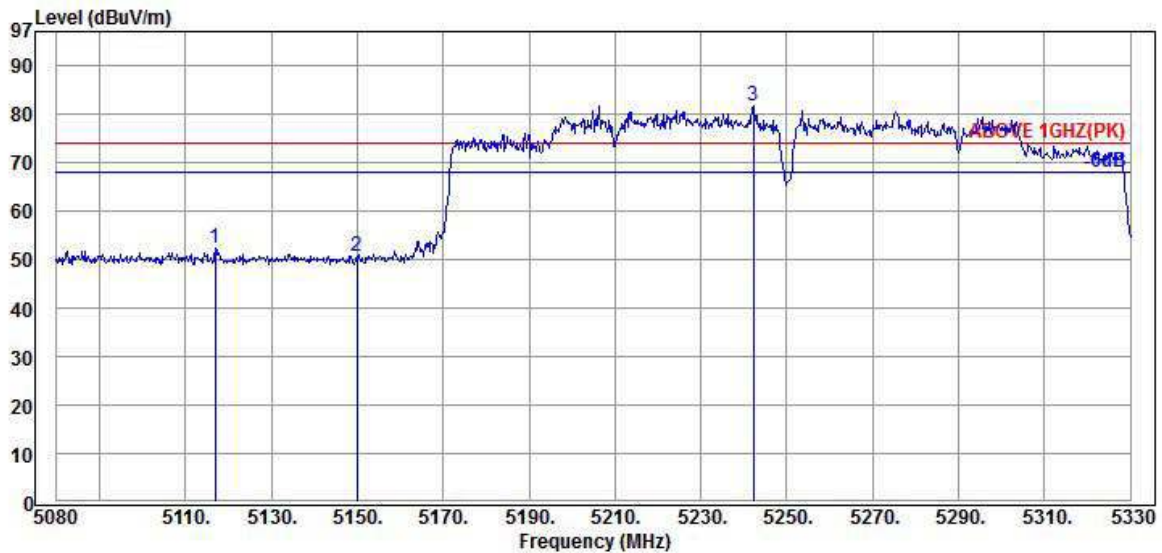

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5117.00	33.39	9.32	44.00	52.17	74.00	21.83	Peak
5150.00	33.44	9.34	42.53	50.76	74.00	23.24	Peak
5242.25	33.59	9.39	73.36	81.78	---	---	Peak

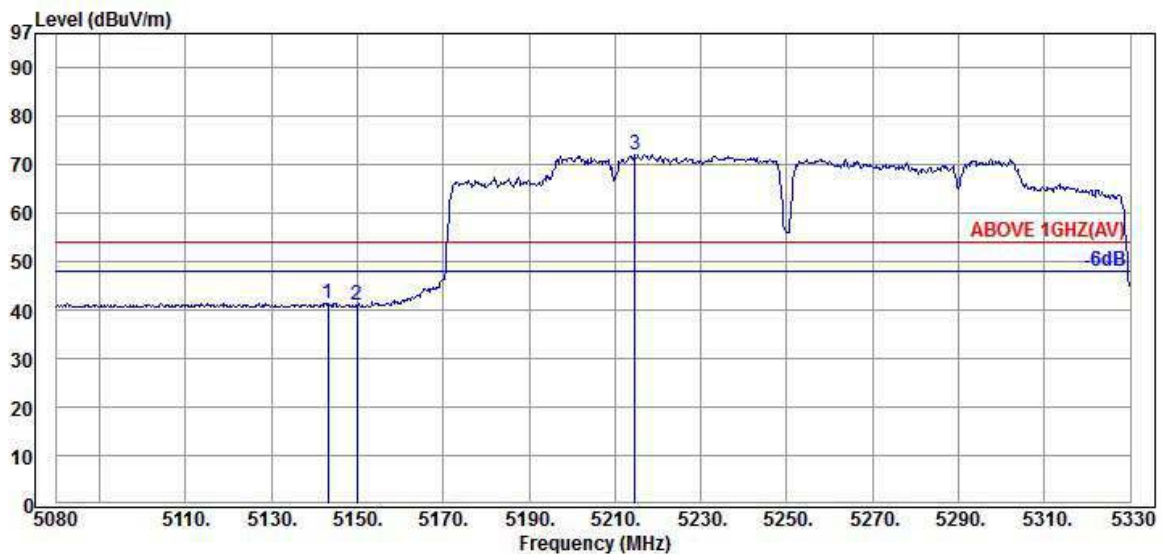


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.25	33.44	9.34	33.21	41.44	54.00	12.56	Average
5150.00	33.44	9.34	32.62	40.85	54.00	13.15	Average
5214.75	33.54	9.38	63.79	72.16	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT160	UNII Band	I
		Frequency	TX 5250MHz

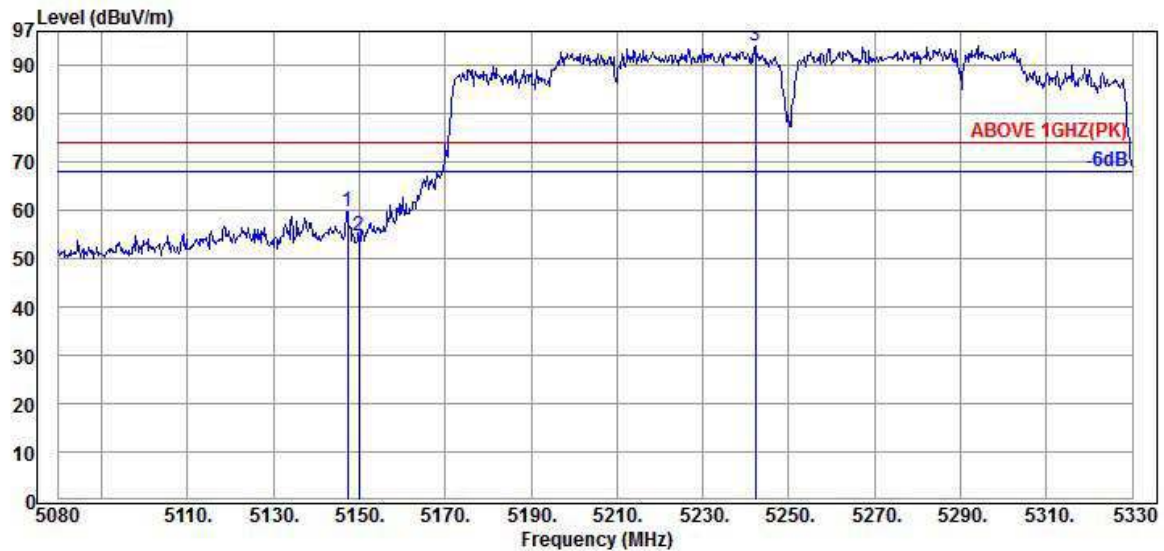

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector
5147.25	33.44	9.34	51.50	59.73	74.00	14.27	Peak
5150.00	33.44	9.34	46.30	54.53	74.00	19.47	Peak
5242.25	33.59	9.39	85.73	94.15	---	---	Peak

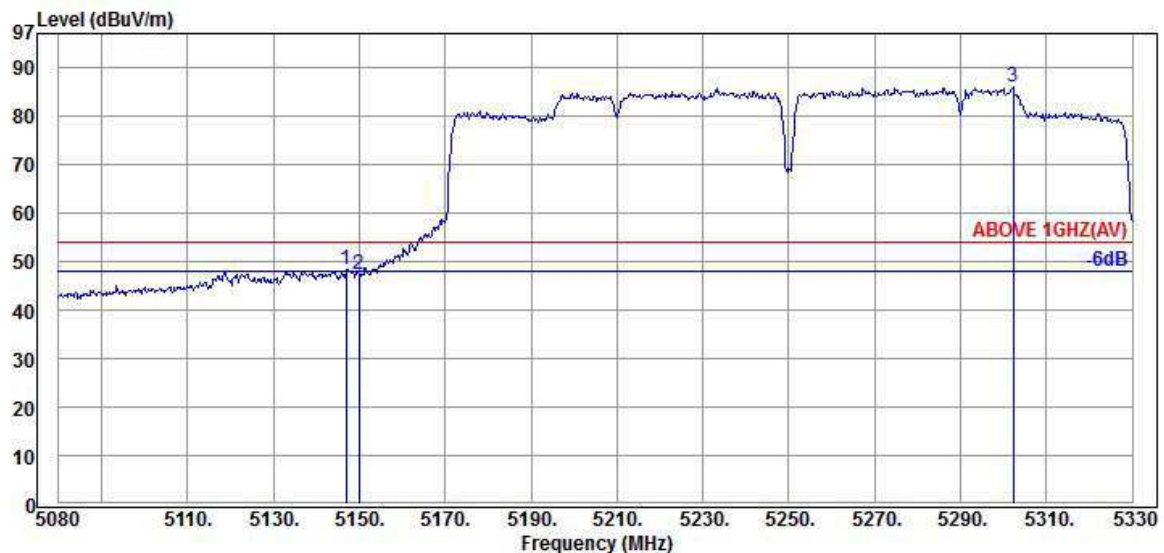


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector
5147.00	33.44	9.34	39.95	48.18	54.00	5.82	Average
5150.00	33.44	9.34	39.16	47.39	54.00	6.61	Average
5302.25	33.68	9.43	77.29	85.84	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT160	UNII Band	I
		Frequency	TX 5250MHz

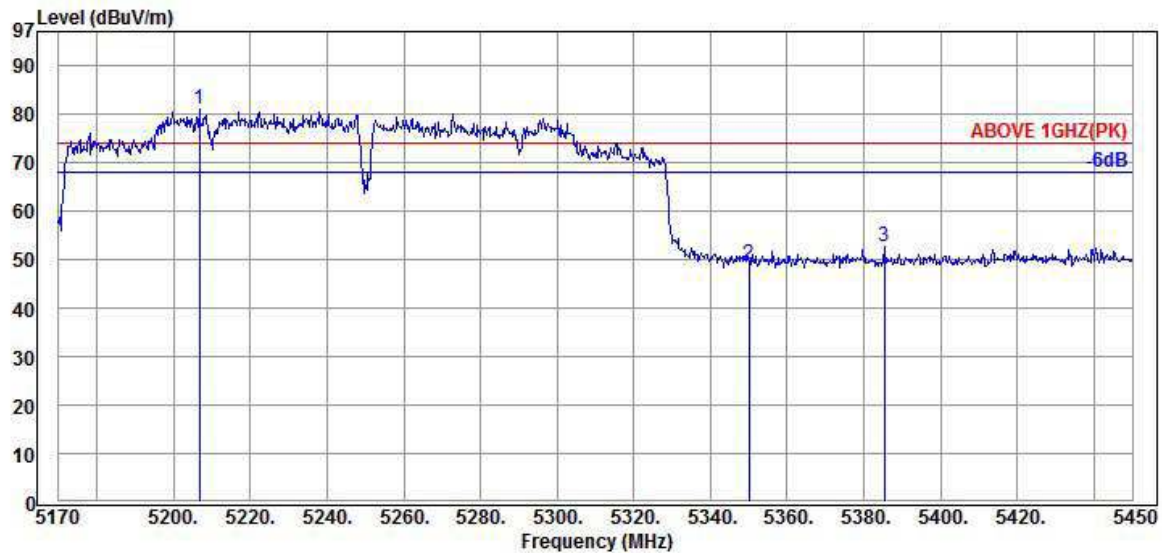

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5206.68	33.54	9.38	72.52	80.89	---	---	Peak
5350.04	33.76	9.46	40.36	49.01	74.00	24.99	Peak
5385.32	33.83	9.48	43.79	52.53	74.00	21.47	Peak

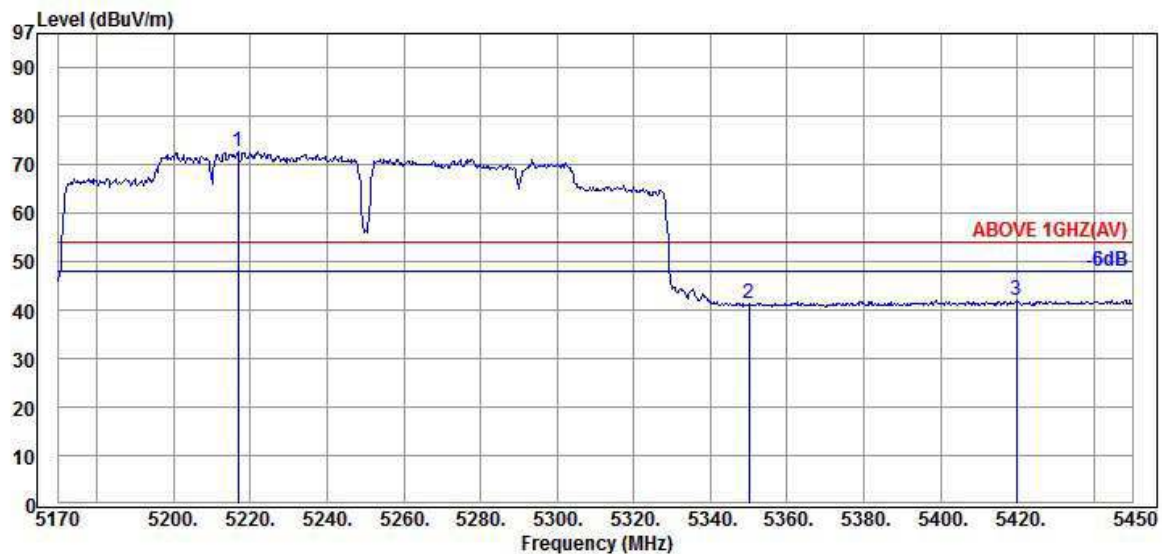

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5216.76	33.56	9.38	64.13	72.52	---	---	Average
5350.04	33.76	9.46	32.63	41.28	54.00	12.72	Average
5419.76	33.88	9.50	33.26	42.07	54.00	11.93	Average

Mode	802.11ac-VHT160	UNII Band	I
		Frequency	TX 5250MHz

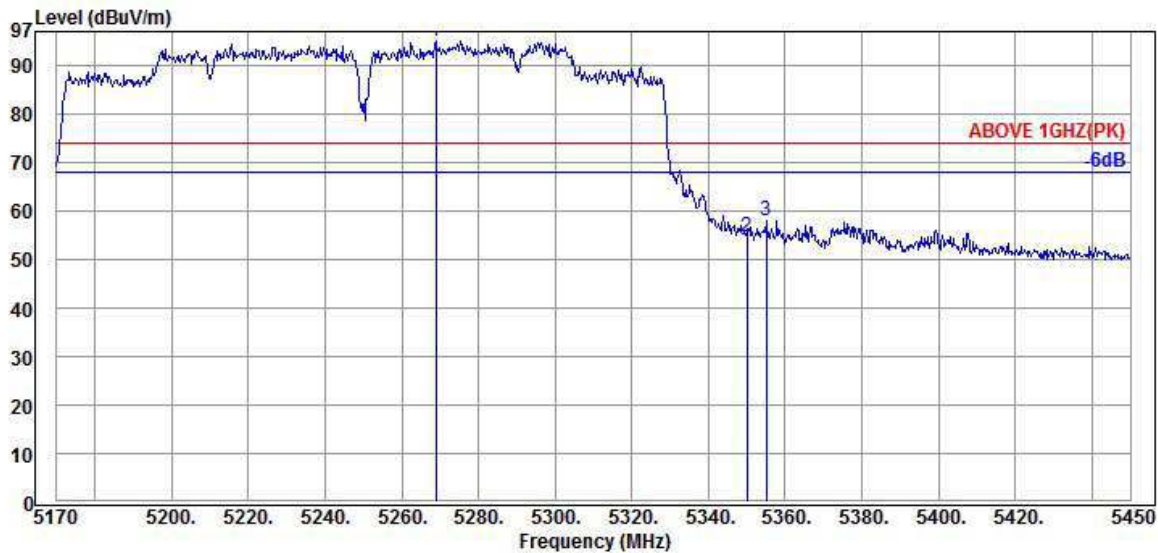

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5268.84	33.64	9.41	86.66	95.15	---	---	Peak
5350.04	33.76	9.46	46.14	54.79	74.00	19.21	Peak
5355.08	33.78	9.46	49.45	58.12	74.00	15.88	Peak

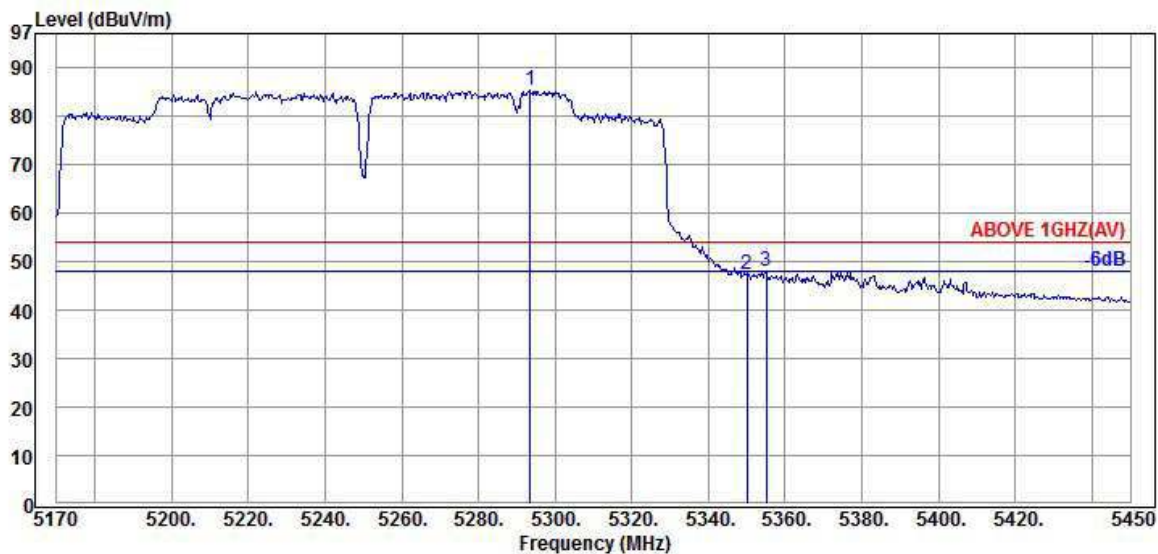


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5293.48	33.68	9.42	76.81	85.35	---	---	Average
5350.04	33.76	9.46	38.66	47.31	54.00	6.69	Average
5355.08	33.78	9.46	39.49	48.16	54.00	5.84	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT160	UNII Band	II-2C
		Frequency	TX 5570MHz

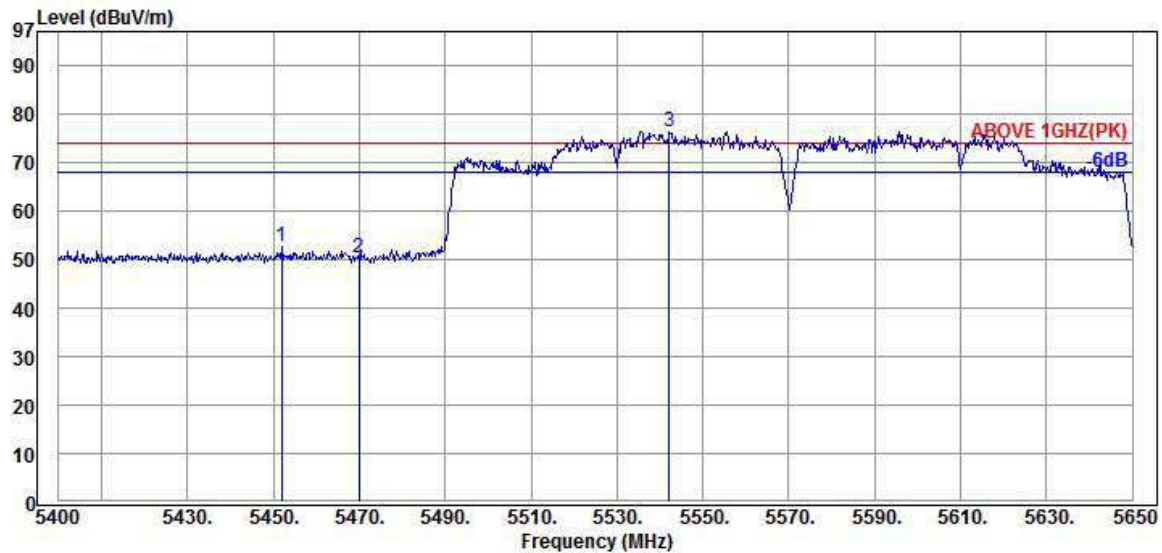

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.00	33.93	9.52	43.89	52.76	74.00	21.24	Peak
5470.00	33.95	9.53	41.31	50.21	74.00	23.79	Peak
5542.25	34.01	9.58	67.41	76.42	---	---	Peak

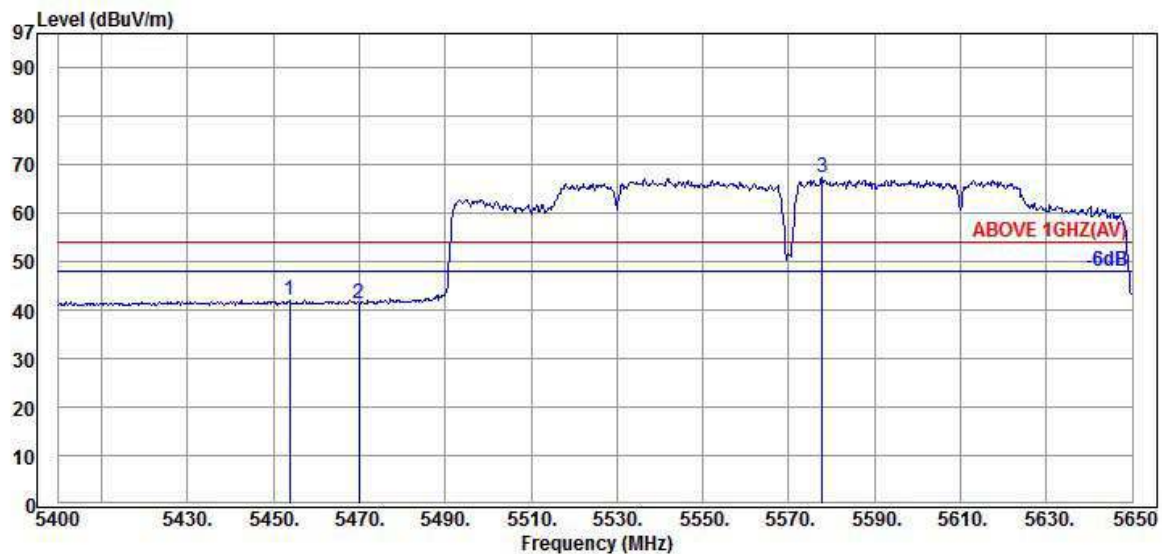

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.75	33.93	9.52	33.17	42.04	54.00	11.96	Average
5470.00	33.95	9.53	32.28	41.18	54.00	12.82	Average
5577.75	34.02	9.60	58.27	67.30	---	---	Average

Mode	802.11ac-VHT160	UNII Band	II-2C
		Frequency	TX 5570MHz

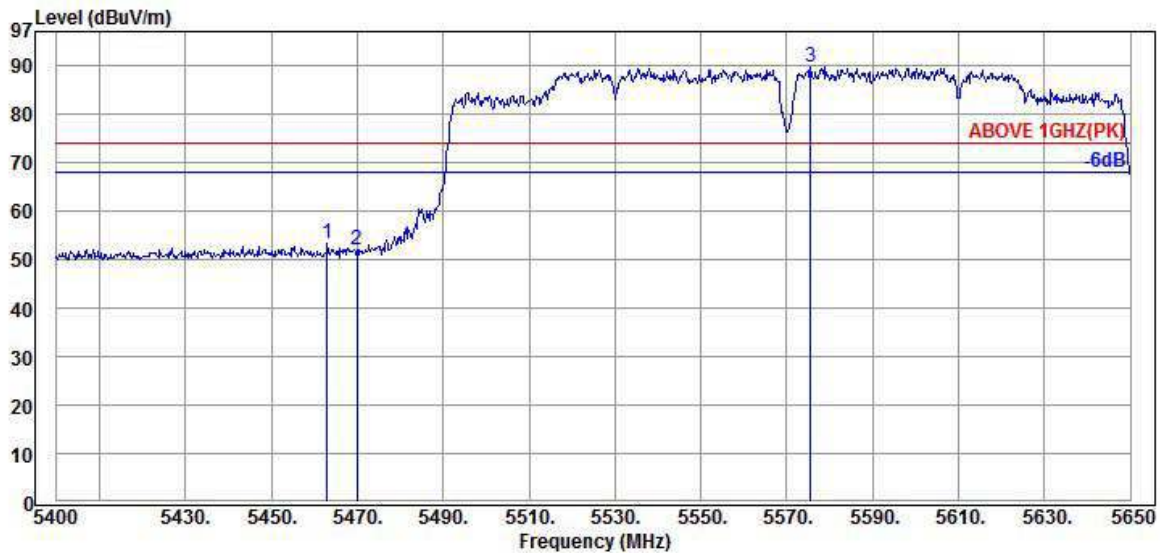

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.00	33.93	9.53	44.35	53.23	74.00	20.77	Peak
5470.00	33.95	9.53	42.99	51.89	74.00	22.11	Peak
5575.50	34.02	9.60	80.78	89.81	---	---	Peak

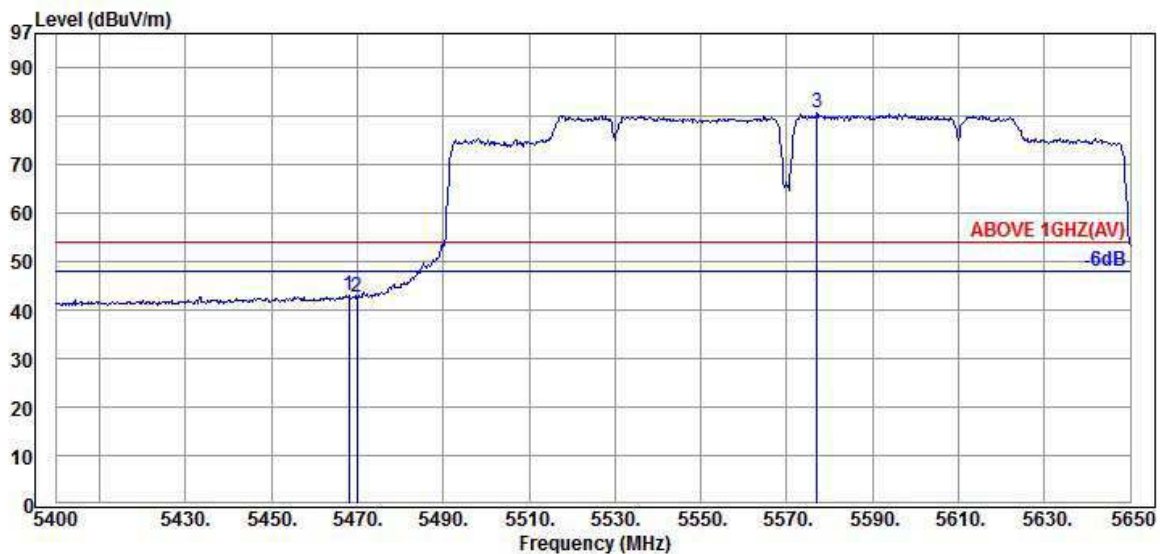

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.00	33.95	9.53	33.96	42.86	54.00	11.14	Average
5470.00	33.95	9.53	33.71	42.61	54.00	11.39	Average
5577.00	34.02	9.60	71.48	80.51	---	---	Average

A.2.2 Emissions outside the frequency band

The emissions (up to 40GHz) not reported for there is no emission be found.

A.2.3 Emissions in Non-restricted Frequency Bands

Pursuant to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 that emission levels below the 15.209 general radiated emissions limits is not required.