

TABLE OF CONTENTS


A.1. CONDUCTED EMISSION	2
A.2. RADIATED EMISSION	6
A.2.1 Emissions within Restricted Frequency Bands.....	6
A.2.2 Emissions outside the frequency band.....	148
A.2.3 Emissions in Non-restricted Frequency Bands	163
A.3. 26dB/6dB BANDWIDTH	164
A.3.1 26dB/6dB Bandwidth Result	164
A.3.2 Measurement Plots	169
A.4. MAXIMUM OUTPUT POWER	191
A.4.1 Average Output Power	191
A.4.2 Measurement Plots	195
A.5. POWER SPECTRAL DENSITY	205
A.5.1 Power Spectral Density Result	205
A.5.2 Measurement Plots	209
A.6. FREQUENCY STABILITY	229

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.1.CONDUCTED EMISSION

Test Date	2021/09/22	Temp./Hum.	28°C/51%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #1 (with INPAQ Antenna)		

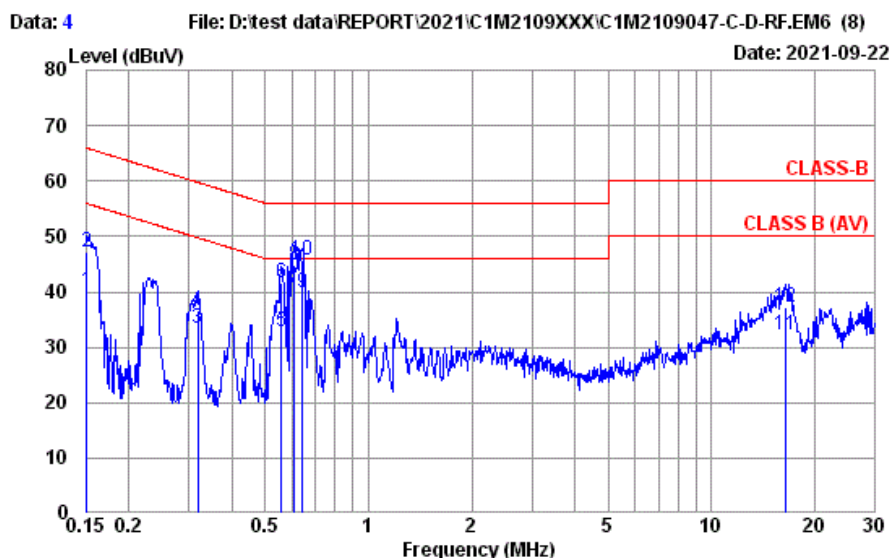

Site No. : No.8 Shielded Room Data No. : 4
Instrument 1 : Receiver ESR3(774)
Instrument 2 : ENI432 (567)(A)|CE-08|ESH3-Z2 (354)
Limit : CLASS-B Phase : LINE
Environment : 28°C / 51% Engineer : Roy Hung
EUT Model : 14Z95P Test Rating : 120Vac/60Hz
Test Mode : Operating
INPAQ


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.151	10.40	0.03	9.85	19.85	40.13	55.96	15.83	Average
2	0.151	10.40	0.03	9.85	26.97	47.25	65.96	18.71	QP
3	0.318	10.38	0.03	9.85	13.22	33.48	49.75	16.27	Average
4	0.318	10.38	0.03	9.85	16.43	36.69	59.75	23.06	QP
5	0.558	10.37	0.03	9.85	12.44	32.69	46.00	13.31	Average
6	0.558	10.37	0.03	9.85	21.42	41.67	56.00	14.33	QP
7	0.608	10.37	0.03	9.85	20.41	40.66	46.00	5.34	Average
8	0.608	10.37	0.03	9.85	24.66	44.91	56.00	11.09	QP
9	0.641	10.38	0.04	9.85	19.61	39.88	46.00	6.12	Average
10	0.641	10.38	0.04	9.85	25.46	45.73	56.00	10.27	QP
11	16.398	10.71	0.18	9.92	11.55	32.36	50.00	17.64	Average
12	16.398	10.71	0.18	9.92	16.40	37.21	60.00	22.79	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2021/09/22	Temp./Hum.	28°C/51%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #1 (with INPAQ Antenna)		

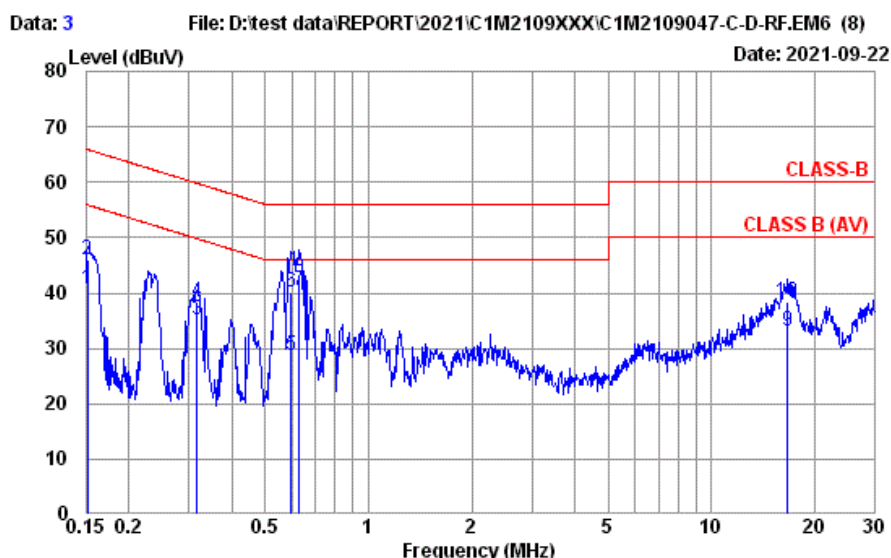

Site No. : No.8 Shielded Room Data No. : 3
Instrument 1 : Receiver ESR3(774)
Instrument 2 : EHV432 (567)(A)|CE-08|ESH3-Z2 (354)
Limit : CLASS-B Phase : NEUTRAL
Environment : 28°C / 51% Engineer : Roy Hung
EUT Model : 14Z95P Test Rating : 120Vac/60Hz
Test Mode : Operating
INPAQ


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.152	10.41	0.03	9.85	20.39	40.68	55.91	15.23	Average
2	0.152	10.41	0.03	9.85	25.81	46.10	65.91	19.81	QP
3	0.317	10.38	0.03	9.85	14.84	35.10	49.80	14.70	Average
4	0.317	10.38	0.03	9.85	18.15	38.41	59.80	21.39	QP
5	0.595	10.37	0.03	9.85	8.41	28.66	46.00	17.34	Average
6	0.595	10.37	0.03	9.85	19.90	40.15	56.00	15.85	QP
7	0.627	10.37	0.03	9.85	20.33	40.58	46.00	5.42	Average
8	0.627	10.37	0.03	9.85	22.64	42.89	56.00	13.11	QP
9	16.661	10.99	0.18	9.92	12.05	33.14	50.00	16.86	Average
10	16.661	10.99	0.18	9.92	17.42	38.51	60.00	21.49	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2021/09/22	Temp./Hum.	28°C/51%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #2 (with LUXSHARE-ICT Antenna)		

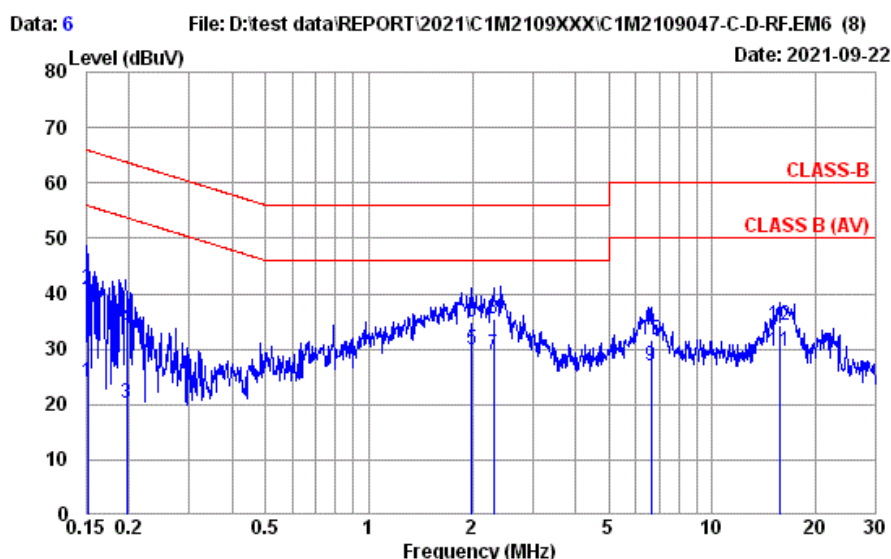

Site No. : No.8 Shielded Room Data No. : 6
Instrument 1 : Receiver ESR3(774)
Instrument 2 : ENH432 (567)(A)|CE-08|ESH3-Z2 (354)
Limit : CLASS-B Phase : NEUTRAL
Environment : 28°C / 51% Engineer : Roy Hung
EUT Model : 14295P Test Rating : 120Vac/60Hz
Test Mode : Operating
Luxshare


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.152	10.41	0.03	9.85	3.81	24.10	55.91	31.81	Average
2	0.152	10.41	0.03	9.85	20.34	40.63	65.91	25.28	QP
3	0.197	10.39	0.03	9.85	0.06	20.33	53.72	33.39	Average
4	0.197	10.39	0.03	9.85	13.56	33.83	63.72	29.89	QP
5	1.991	10.41	0.06	9.86	9.42	29.75	46.00	16.25	Average
6	1.991	10.41	0.06	9.86	14.44	34.77	56.00	21.23	QP
7	2.309	10.42	0.07	9.86	8.64	28.99	46.00	17.01	Average
8	2.309	10.42	0.07	9.86	15.17	35.52	56.00	20.48	QP
9	6.627	10.58	0.11	9.87	6.47	27.03	50.00	22.97	Average
10	6.627	10.58	0.11	9.87	11.08	31.64	60.00	28.36	QP
11	15.801	10.96	0.18	9.92	8.46	29.52	50.00	20.48	Average
12	15.801	10.96	0.18	9.92	13.23	34.29	60.00	25.71	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2021/09/22	Temp./Hum.	28°C/51%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #2 (with LUXSHARE-ICT Antenna)		

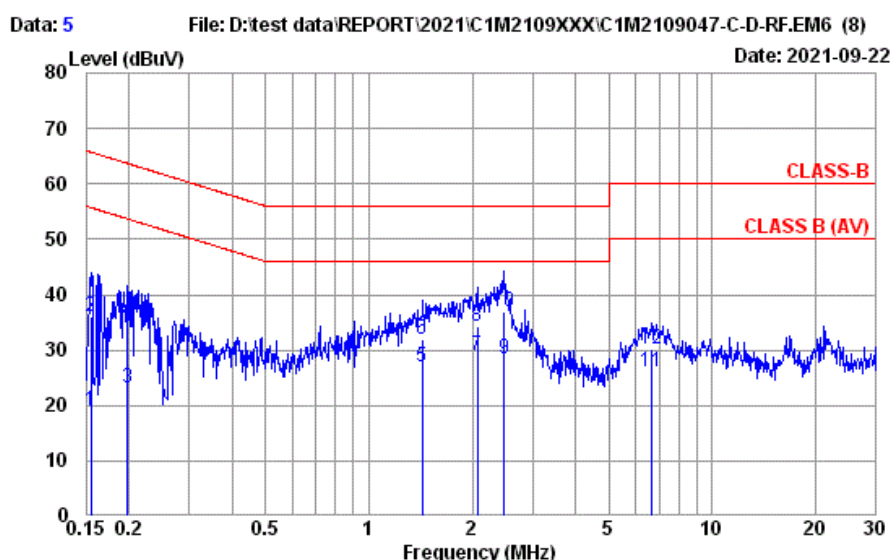

Site No. : No.8 Shielded Room Data No. : 5
Instrument 1 : Receiver ESR3(774)
Instrument 2 : ENIV432 (567)(A)|CE-08|ESH3-Z2 (354)
Limit : CLASS-B Phase : LINE
Environment : 28°C / 51% Engineer : Roy Hung
EUT Model : 14Z95P Test Rating : 120Vac/60Hz
Test Mode : Operating
Luxshare

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.155	10.40	0.03	9.85	-1.12	19.16	55.74	36.58	Average
2	0.155	10.40	0.03	9.85	15.84	36.12	65.74	29.62	QP
3	0.198	10.39	0.03	9.85	2.99	23.26	53.71	30.45	Average
4	0.198	10.39	0.03	9.85	14.92	35.19	63.71	28.52	QP
5	1.433	10.39	0.05	9.86	6.76	27.06	46.00	18.94	Average
6	1.433	10.39	0.05	9.86	11.76	32.06	56.00	23.94	QP
7	2.066	10.40	0.06	9.86	8.71	29.03	46.00	16.97	Average
8	2.066	10.40	0.06	9.86	14.08	34.40	56.00	21.60	QP
9	2.475	10.41	0.07	9.86	7.99	28.33	46.00	17.67	Average
10	2.475	10.41	0.07	9.86	16.44	36.78	56.00	19.22	QP
11	6.662	10.50	0.11	9.87	5.49	25.97	50.00	24.03	Average
12	6.662	10.50	0.11	9.87	9.69	30.17	60.00	29.83	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.

A.2. RADIATED EMISSION

Test Date	2021/09/15~24	Temp./Hum.	25°C /52~62%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Kuper Hsu
Test SKU	SKU #1 (with INPAQ Antenna)		

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.970	23.26	1.20	26.51	38.21	36.16	40.00	3.84	Peak
122.150	17.87	2.55	26.16	46.78	41.04	43.50	2.46	Peak
243.400	17.82	3.79	25.75	48.19	44.05	46.00	1.95	Peak
593.570	24.23	6.75	27.42	36.21	39.77	46.00	6.23	Peak
742.950	25.30	7.51	27.40	37.78	43.19	46.00	2.81	Peak
965.080	26.85	8.79	26.79	29.98	38.83	54.00	15.17	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.970	23.26	1.20	26.51	39.24	37.19	40.00	2.81	Peak
122.150	17.87	2.55	26.16	45.54	39.80	43.50	3.70	Peak
236.610	17.43	3.73	25.76	46.29	41.69	46.00	4.31	Peak
593.570	24.23	6.75	27.42	38.66	42.22	46.00	3.78	Peak
742.950	25.30	7.51	27.40	38.44	43.85	46.00	2.15	Peak
967.020	26.85	8.79	26.79	30.40	39.25	54.00	14.75	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan


Tel: +886 2 26099301

Fax: +886 2 26099303

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	802.11a	U-NII Band	I
		Frequency	TX 5180MHz

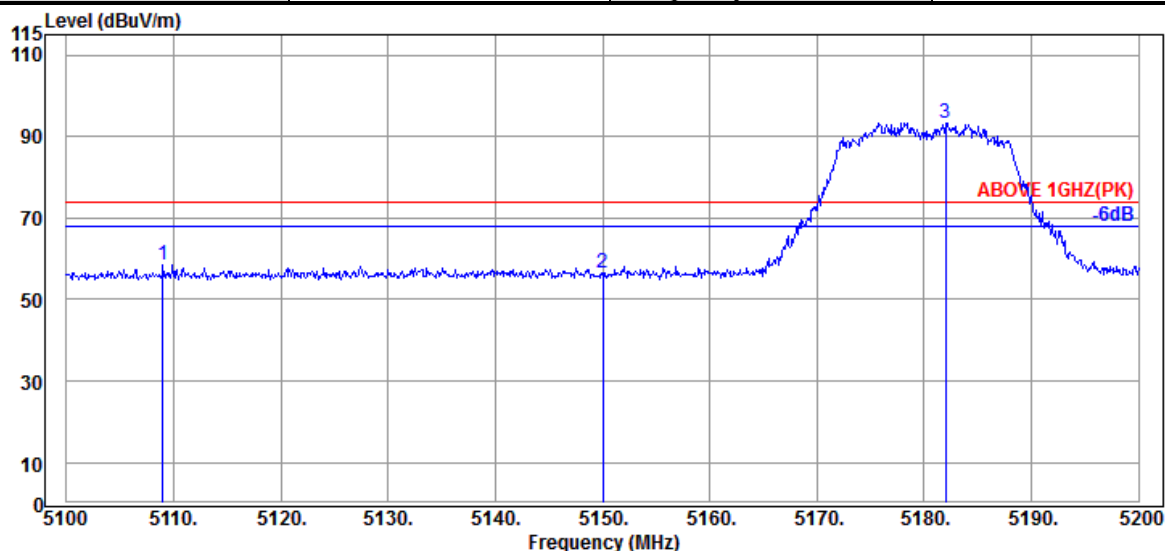

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5109.000	34.10	10.68	34.36	48.23	58.65	74.00	15.35	Peak
5150.000	34.20	10.70	34.35	45.86	56.41	74.00	17.59	Peak
@ 5182.000	34.20	10.72	34.34	82.84	93.42	---	---	Peak

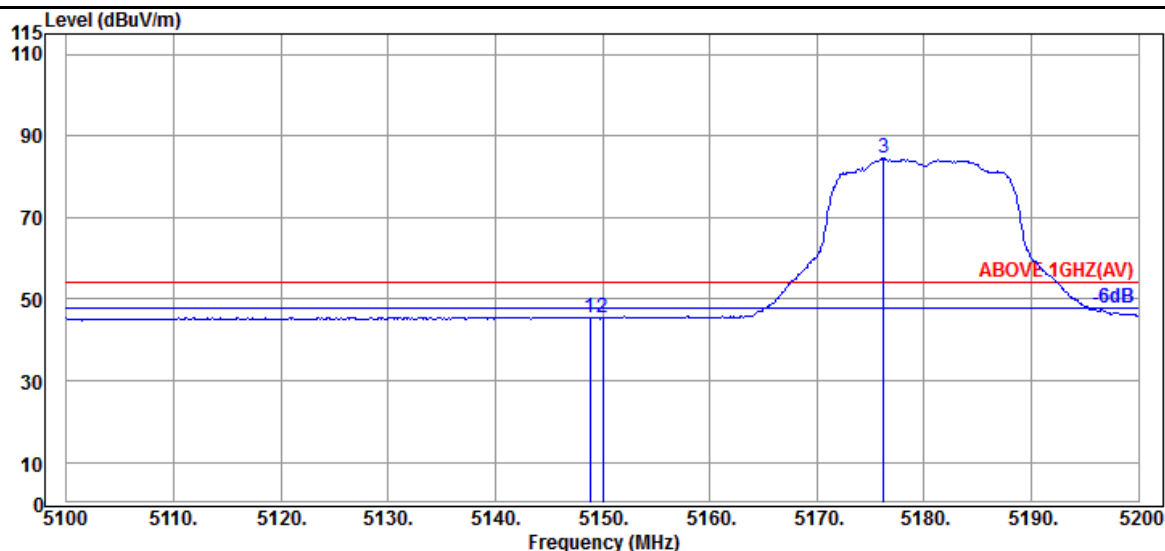

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.800	34.20	10.70	34.35	35.05	45.60	54.00	8.40	Average
5150.000	34.20	10.70	34.35	34.85	45.40	54.00	8.60	Average
@ 5176.200	34.20	10.72	34.34	73.98	84.56	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	I
		Frequency	TX 5180MHz

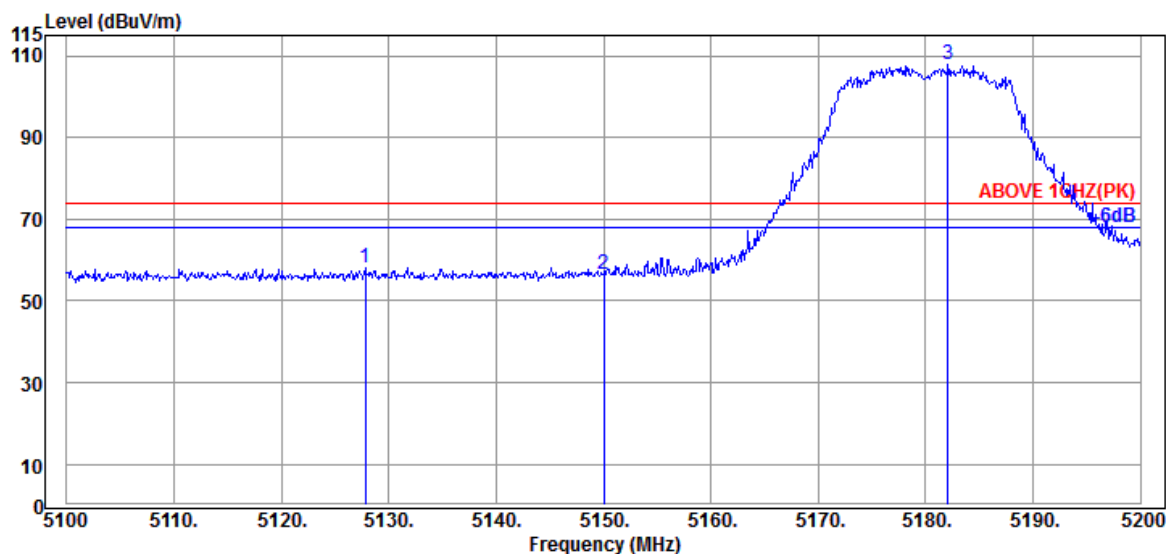

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5127.800	34.17	10.70	34.36	47.47	57.98	74.00	16.02	Peak
5150.000	34.20	10.70	34.35	45.89	56.44	74.00	17.56	Peak
@ 5182.100	34.20	10.72	34.34	97.16	107.74	---	---	Peak

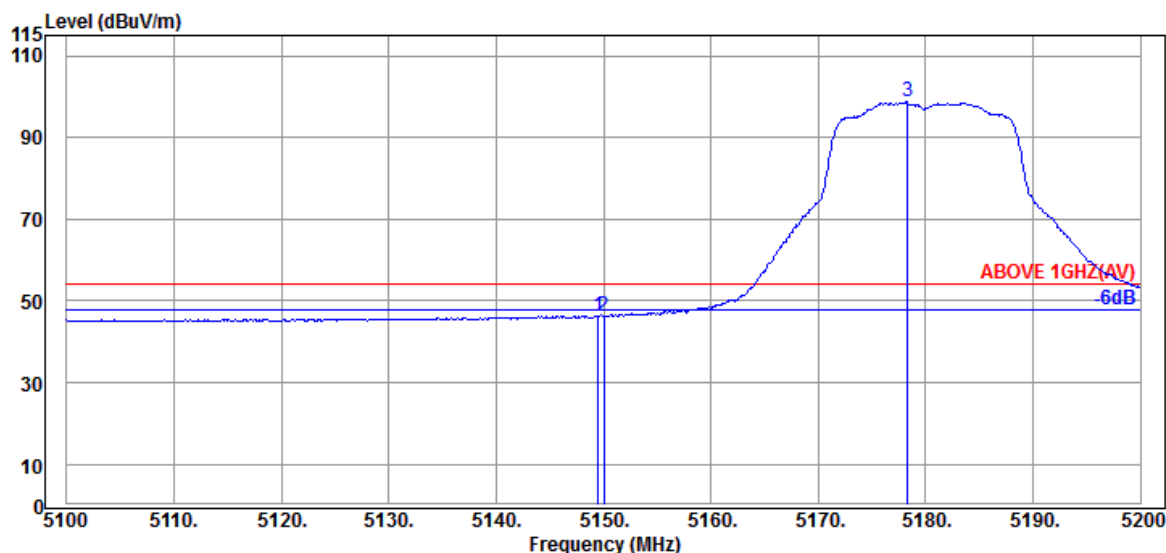

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5149.500	34.20	10.70	34.35	35.82	46.37	54.00	7.63	Average
5150.000	34.20	10.70	34.35	35.78	46.33	54.00	7.67	Average
@ 5178.300	34.20	10.72	34.34	88.07	98.65	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

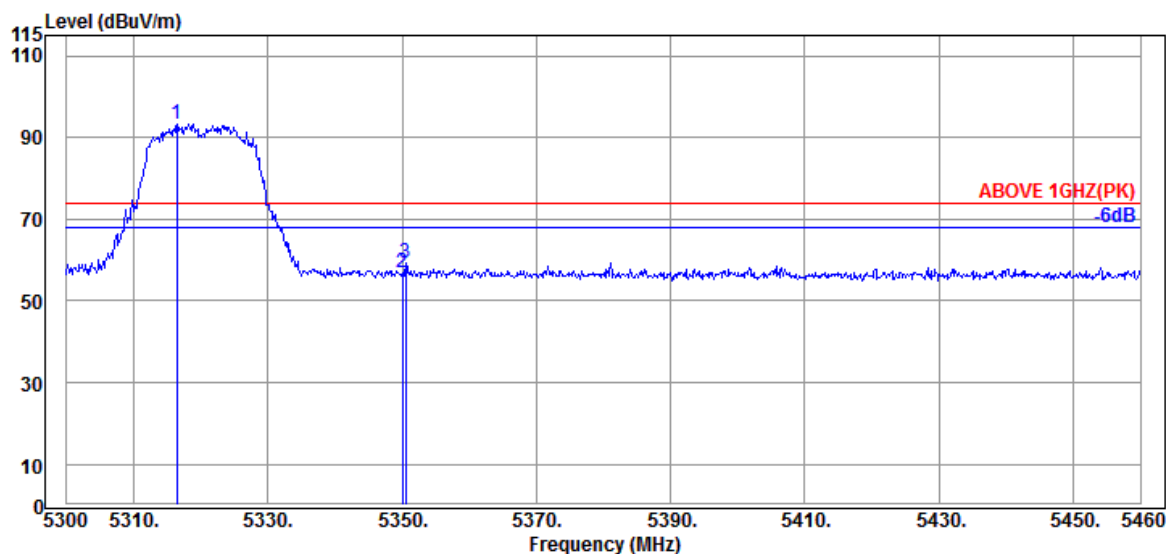

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.480	34.53	10.81	34.29	82.34	93.39	---	---	Peak
5350.080	34.60	10.83	34.27	45.78	56.94	74.00	17.06	Peak
5350.560	34.60	10.83	34.27	48.05	59.21	74.00	14.79	Peak

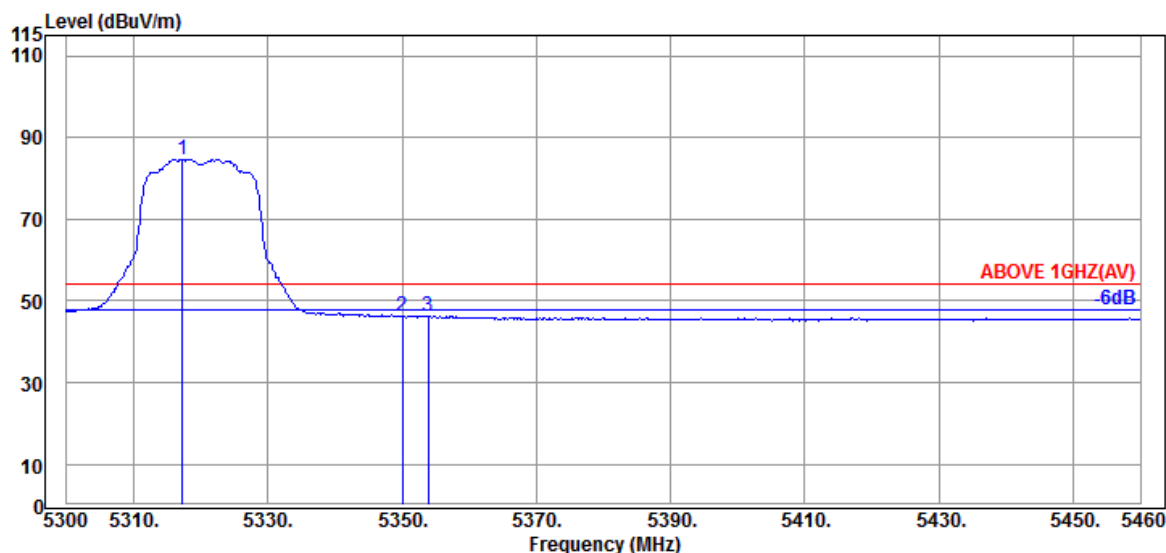

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.280	34.53	10.81	34.29	73.71	84.76	---	---	Average
5350.080	34.60	10.83	34.27	35.07	46.23	54.00	7.77	Average
5353.920	34.60	10.83	34.27	35.24	46.40	54.00	7.60	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

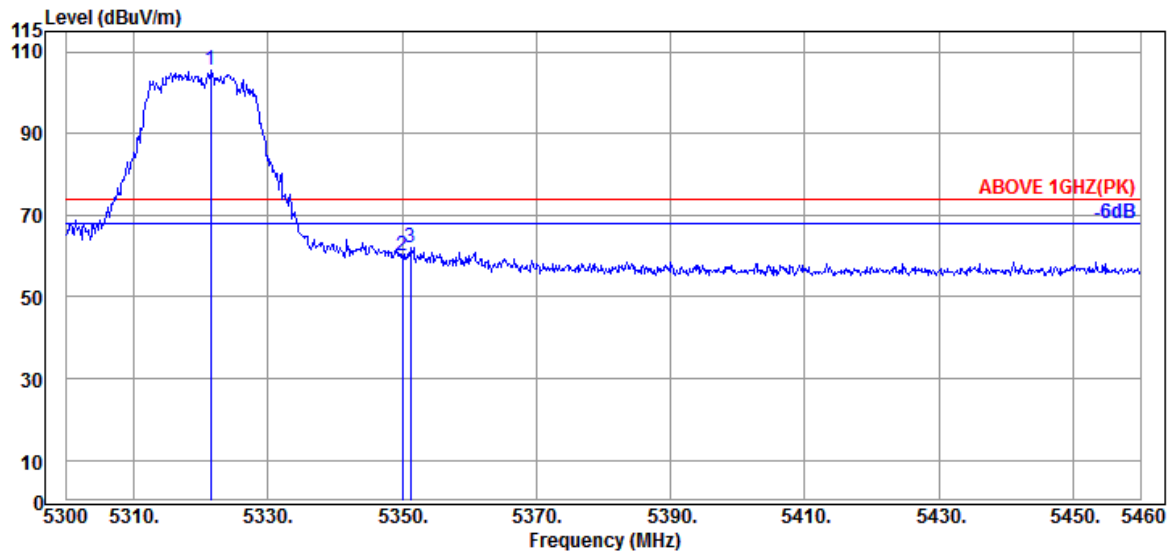

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.440	34.53	10.81	34.29	94.48	105.53	---	---	Peak
5350.080	34.60	10.83	34.27	48.75	59.91	74.00	14.09	Peak
5351.200	34.60	10.83	34.27	50.95	62.11	74.00	11.89	Peak

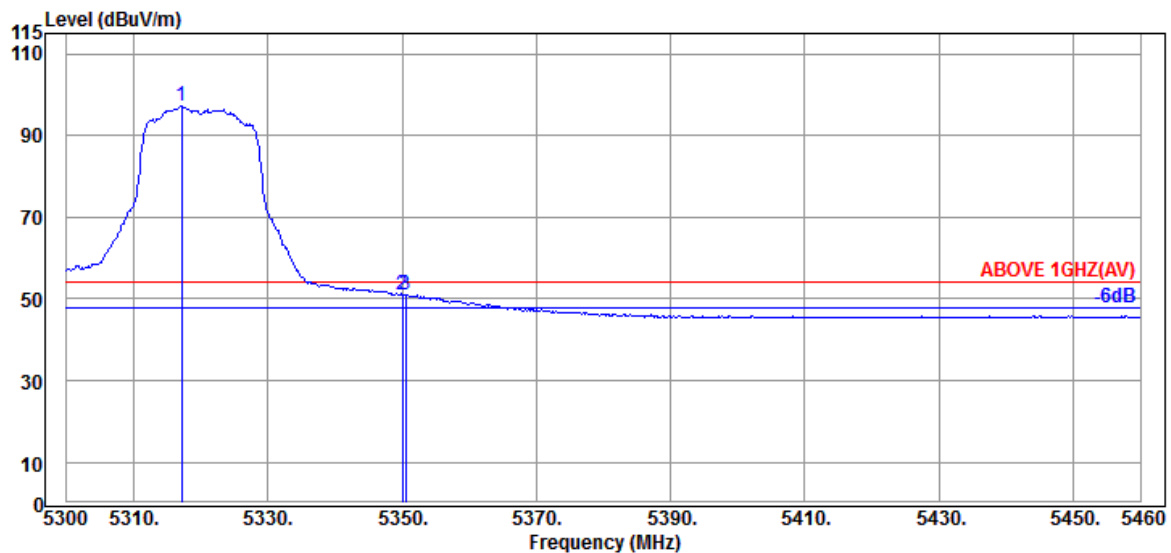

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.120	34.53	10.81	34.29	85.99	97.04	---	---	Average
5350.080	34.60	10.83	34.27	39.86	51.02	54.00	2.98	Average
5350.560	34.60	10.83	34.27	39.83	50.99	54.00	3.01	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

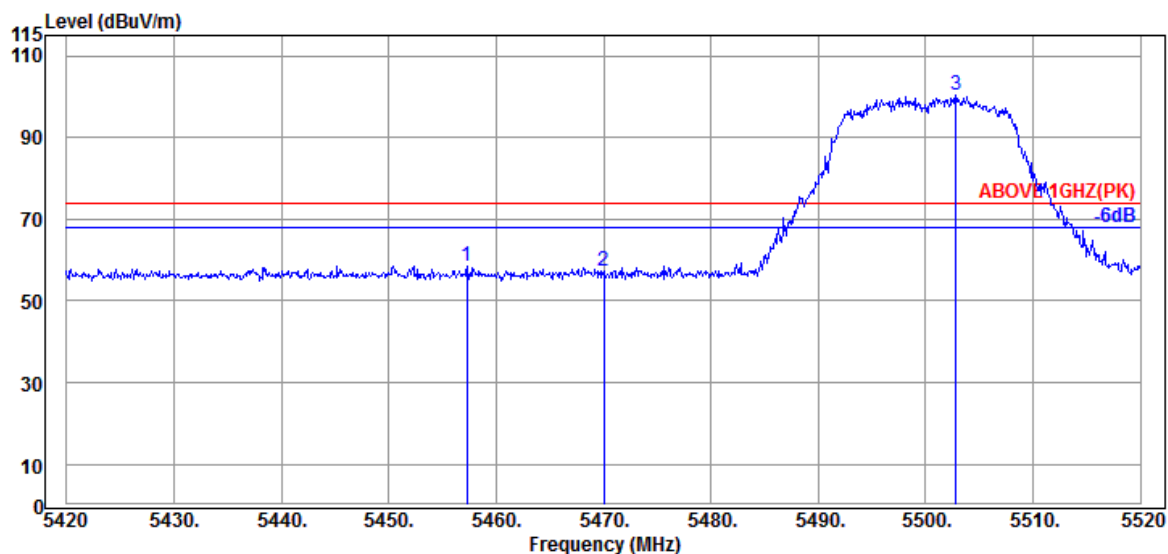

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5457.300	34.50	10.89	34.24	47.41	58.56	74.00	15.44	Peak
5470.000	34.47	10.91	34.24	46.33	57.47	74.00	16.53	Peak
@ 5502.800	34.40	10.93	34.24	89.12	100.21	---	---	Peak

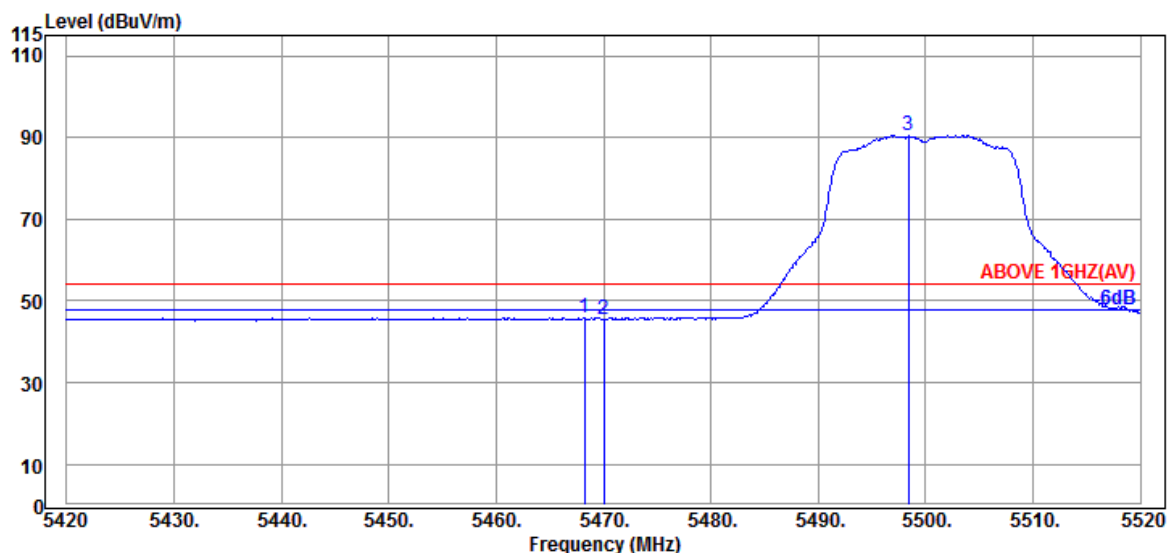

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.200	34.47	10.91	34.24	34.72	45.86	54.00	8.14	Average
5470.000	34.47	10.91	34.24	34.35	45.49	54.00	8.51	Average
@ 5498.400	34.40	10.93	34.23	79.43	90.53	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

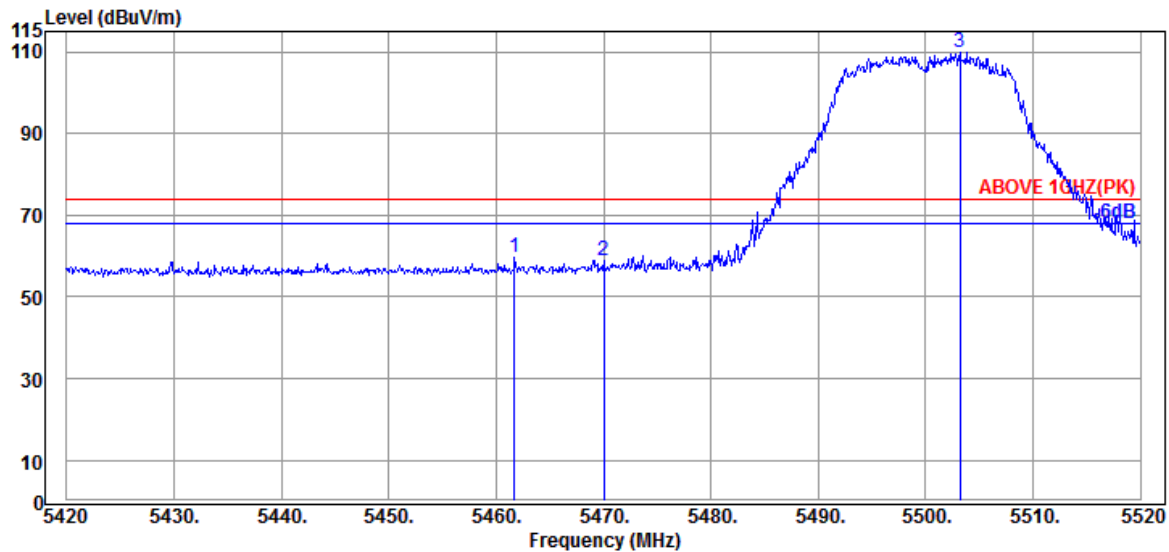

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5461.700	34.50	10.91	34.24	48.51	59.68	74.00	14.32	Peak
5470.000	34.47	10.91	34.24	47.69	58.83	74.00	15.17	Peak
@ 5503.200	34.40	10.93	34.24	98.65	109.74	---	---	Peak

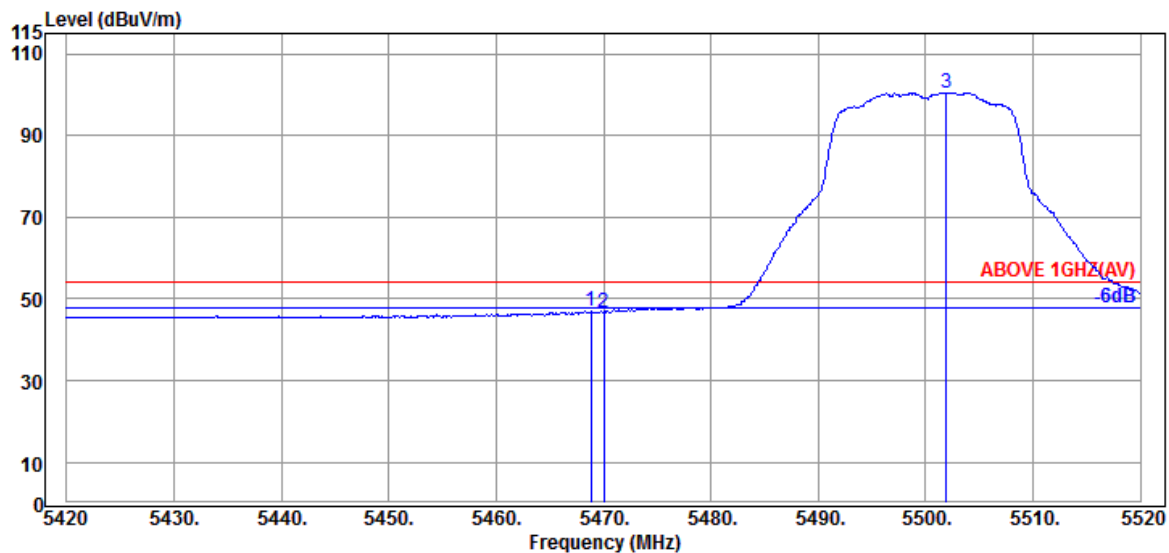

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.800	34.47	10.91	34.24	35.73	46.87	54.00	7.13	Average
5470.000	34.47	10.91	34.24	35.57	46.71	54.00	7.29	Average
@ 5501.900	34.40	10.93	34.24	89.43	100.52	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5700MHz

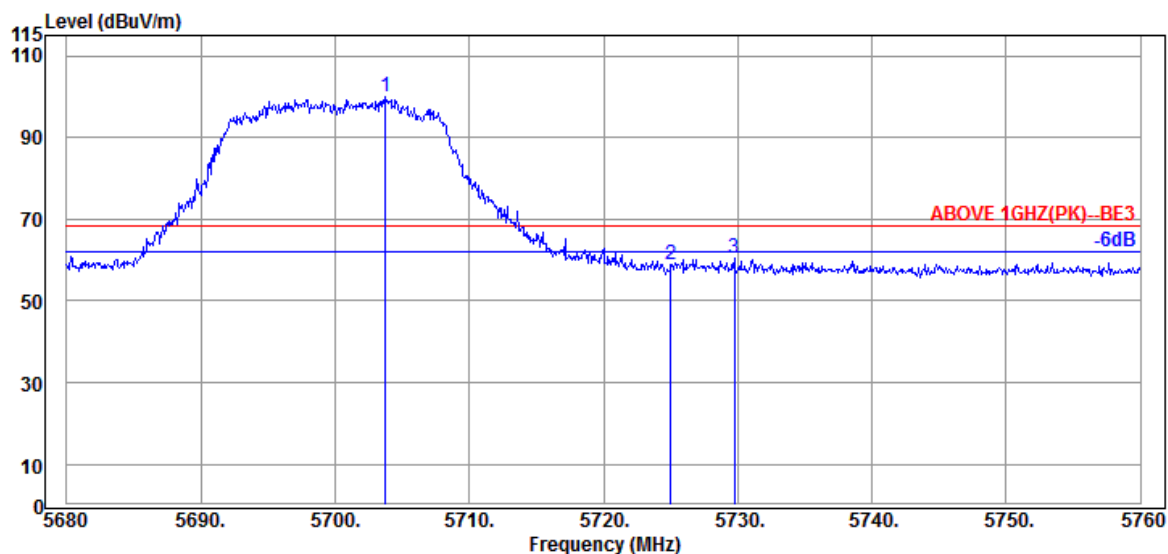

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5703.760	34.40	11.03	34.31	89.01	100.13	---	---	Peak
	5725.040	34.67	11.05	34.32	47.34	58.74	68.20	9.46	Peak
	5729.760	34.67	11.05	34.32	48.99	60.39	68.20	7.81	Peak

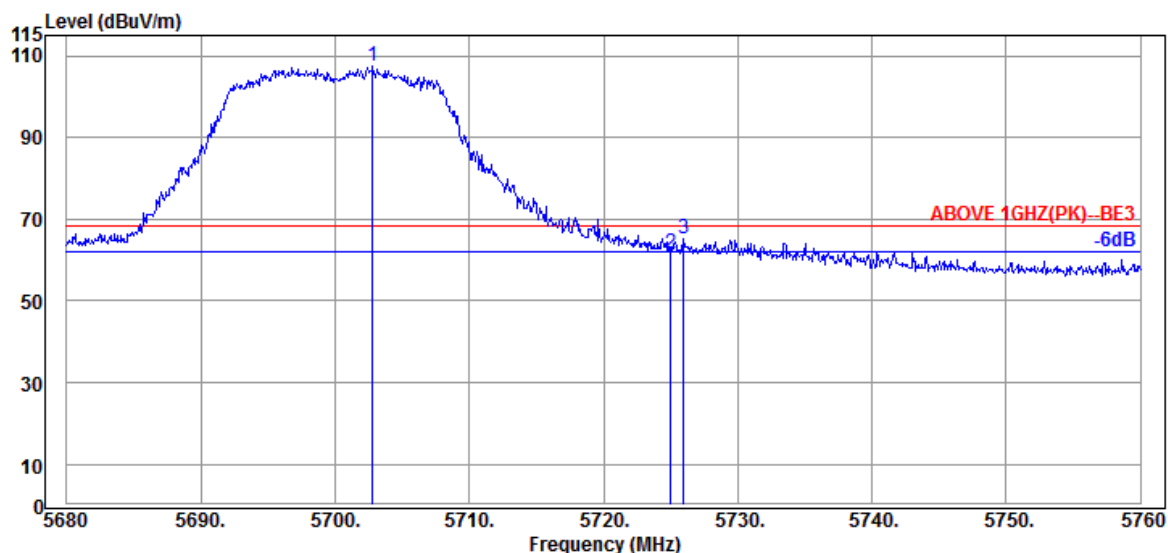

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5702.800	34.40	11.03	34.31	96.39	107.51	---	---	Peak
	5725.040	34.67	11.05	34.32	50.44	61.84	68.20	6.36	Peak
	5726.000	34.67	11.05	34.32	53.90	65.30	68.20	2.90	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

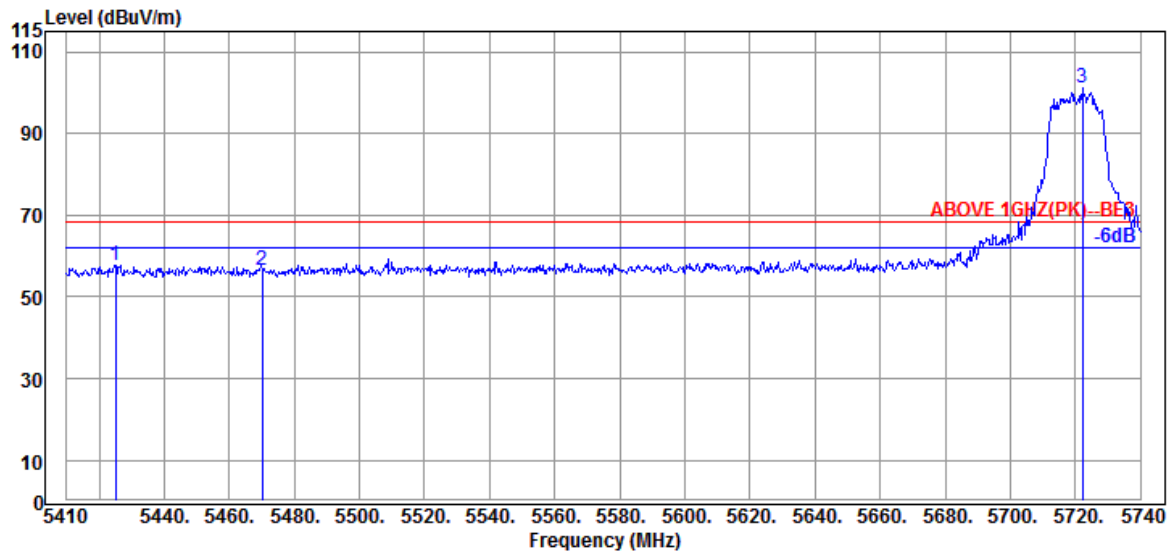

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5425.180	34.60	10.89	34.25	46.59	57.83	68.20	10.37	Peak
5470.060	34.47	10.91	34.24	45.38	56.52	68.20	11.68	Peak
@ 5722.180	34.67	11.05	34.32	89.74	101.14	---	---	Peak

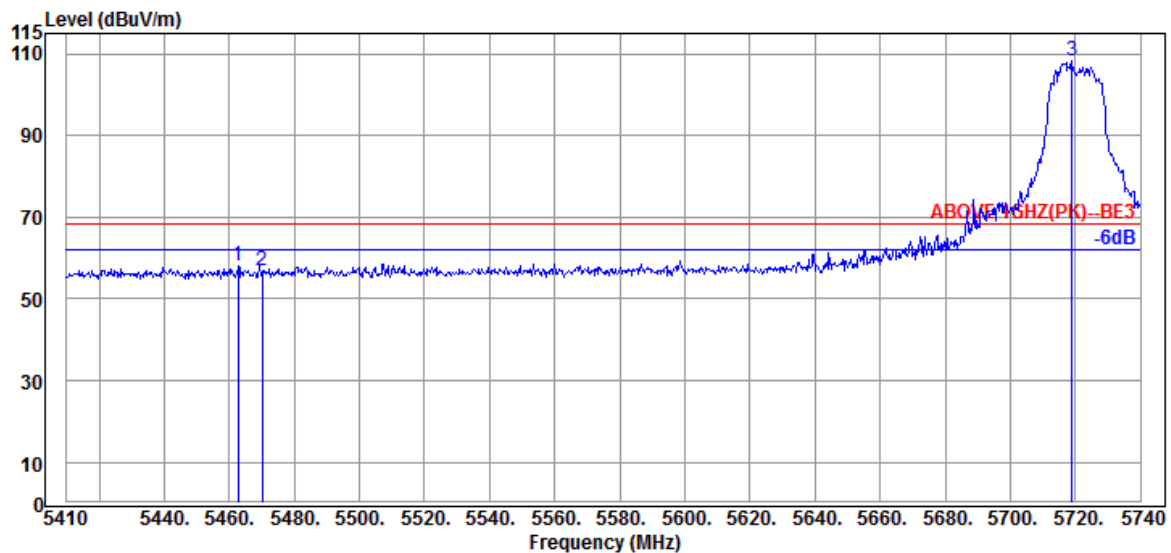

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.800	34.50	10.91	34.24	46.86	58.03	68.20	10.17	Peak
5470.060	34.47	10.91	34.24	45.61	56.75	68.20	11.45	Peak
@ 5718.880	34.53	11.05	34.32	97.01	108.27	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

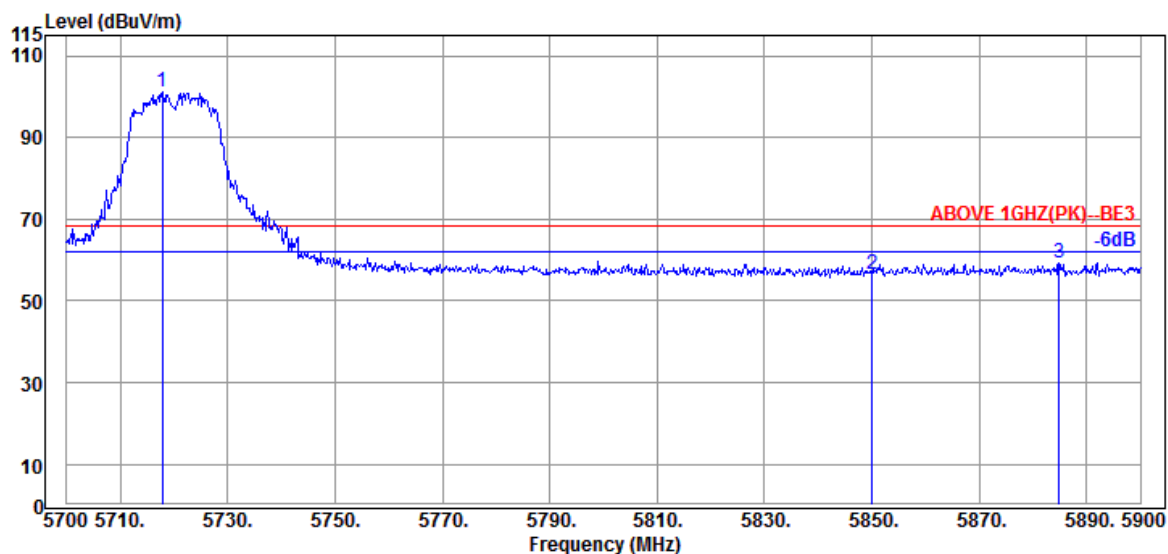

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5717.800	34.53	11.05	34.32	89.90	101.16	---	---	Peak
	5850.000	35.10	11.10	34.38	44.55	56.37	68.20	11.83	Peak
	5884.800	35.30	11.12	34.40	47.38	59.40	68.20	8.80	Peak

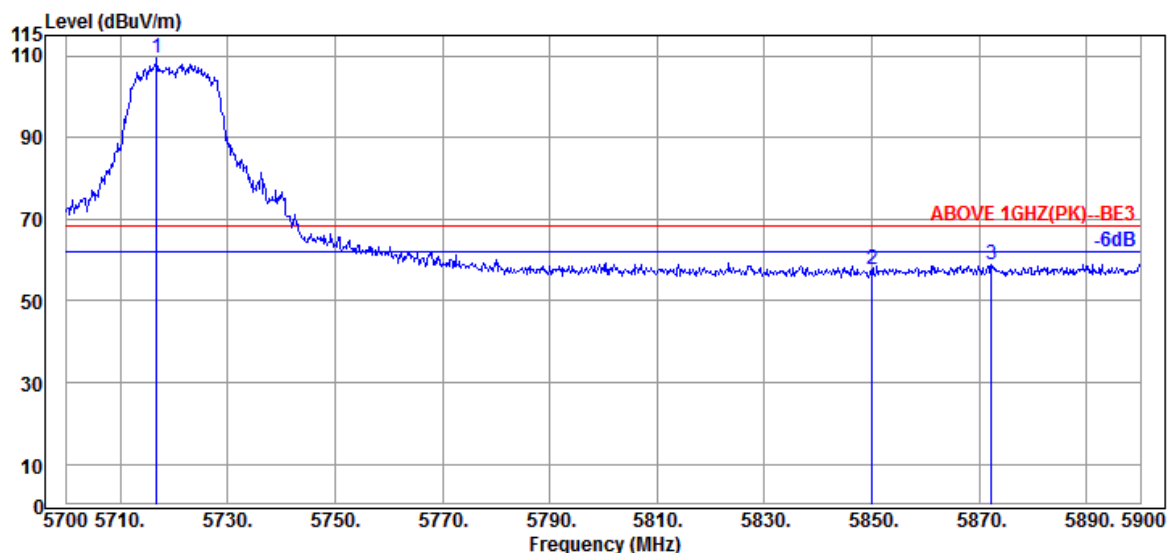

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5716.800	34.53	11.05	34.32	98.16	109.42	---	---	Peak
	5850.000	35.10	11.10	34.38	46.00	57.82	68.20	10.38	Peak
	5872.200	35.20	11.12	34.39	47.12	59.05	68.20	9.15	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,


New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	III
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

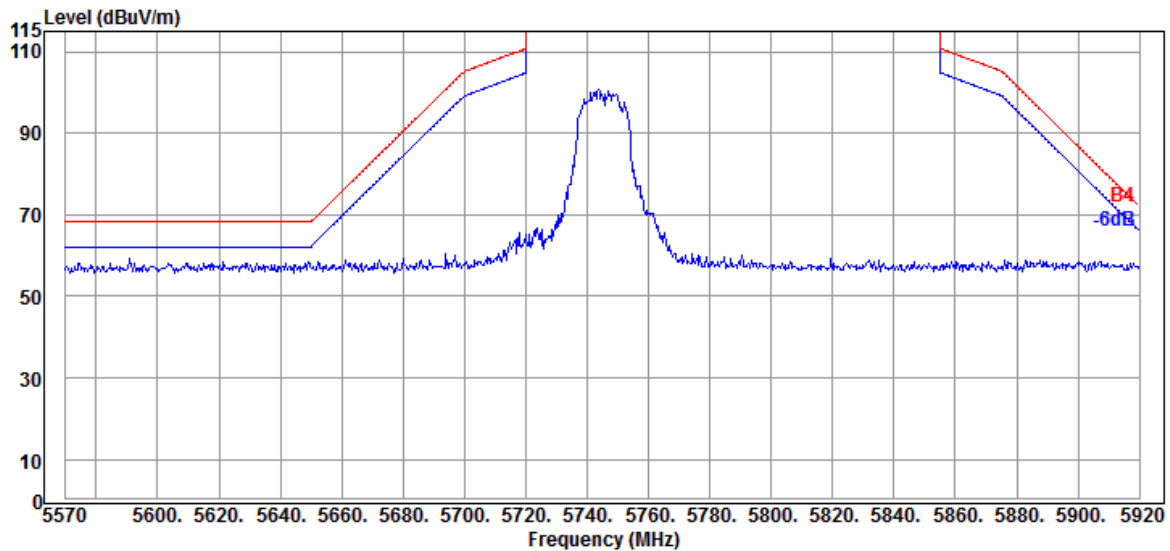

Antenna at Vertical Polarization

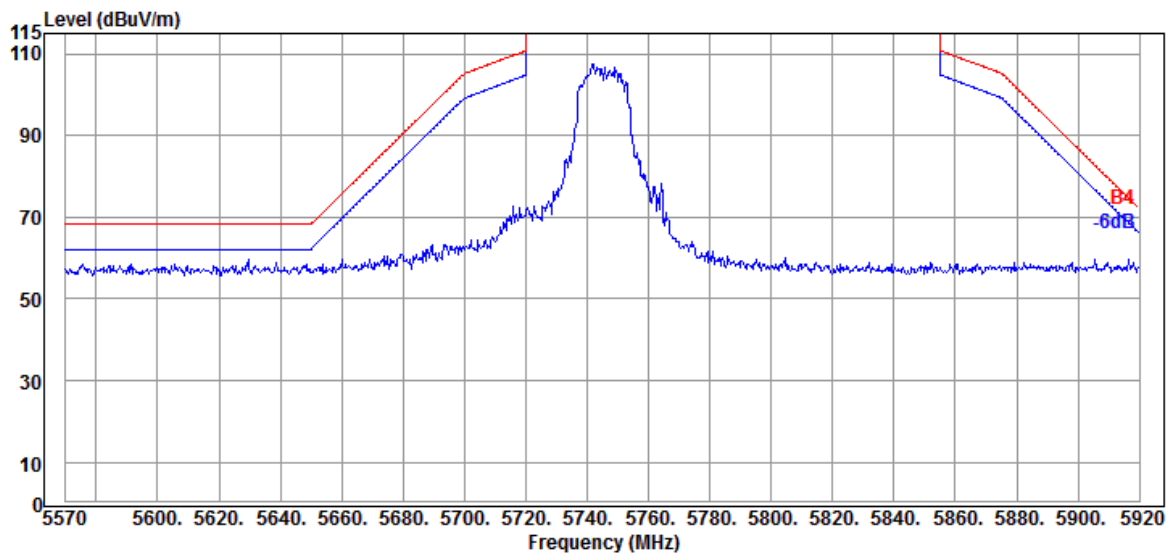


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	U-NII Band	III
		Frequency	TX 5825MHz

Antenna at Horizontal Polarization

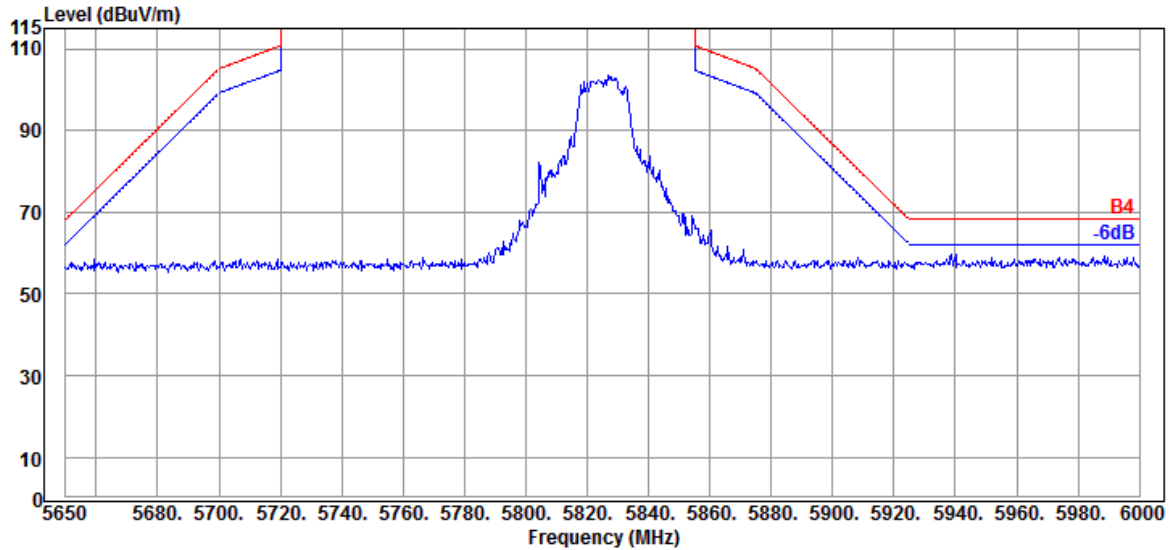

Antenna at Vertical Polarization

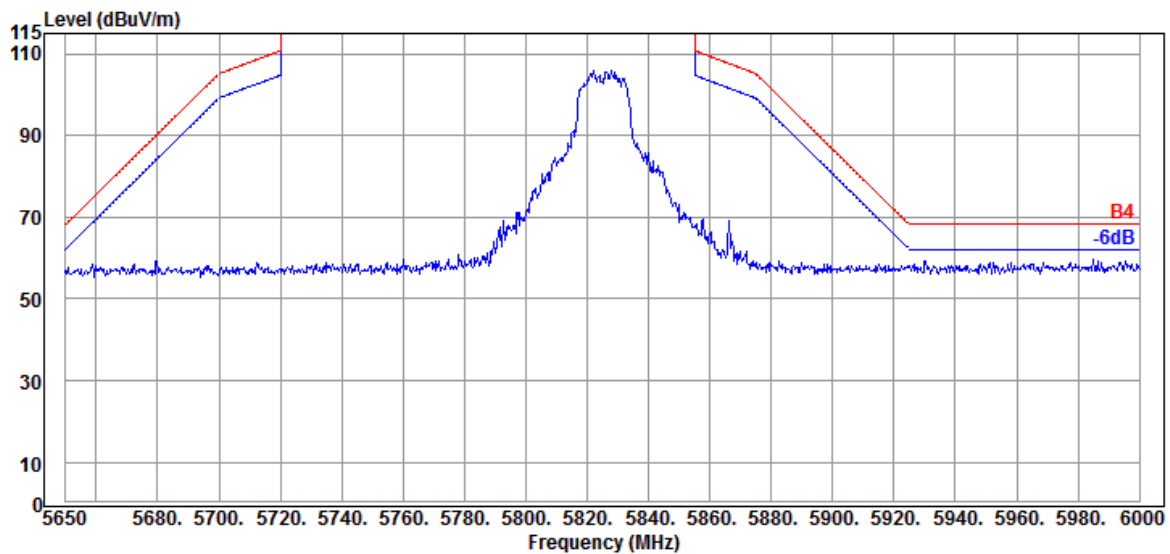

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	I
		Frequency	TX 5180MHz

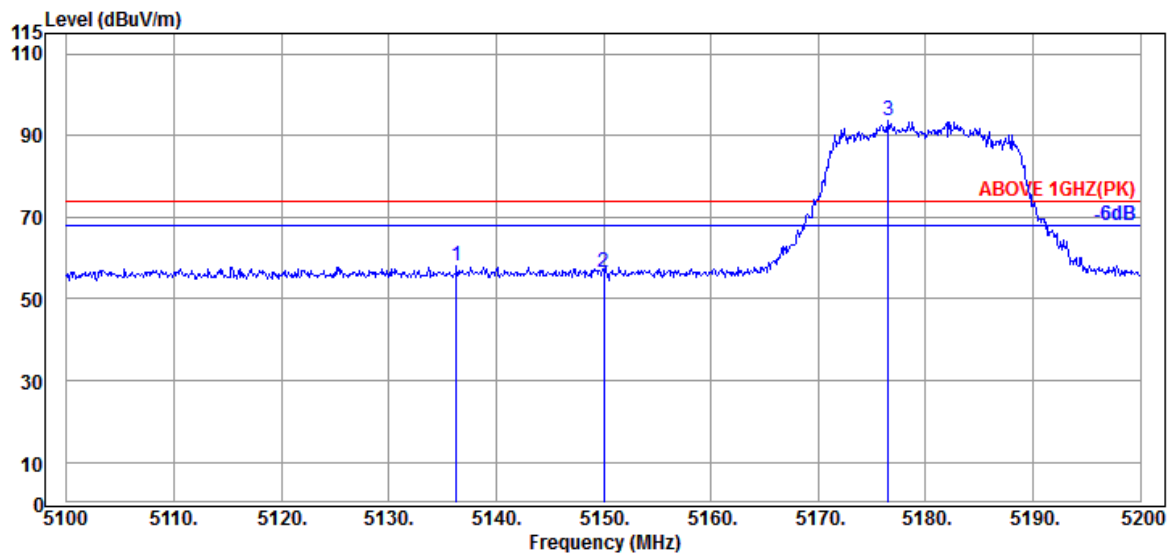

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5136.300	34.17	10.70	34.36	47.40	57.91	74.00	16.09	Peak
5150.000	34.20	10.70	34.35	45.83	56.38	74.00	17.62	Peak
@ 5176.500	34.20	10.72	34.34	82.99	93.57	---	---	Peak

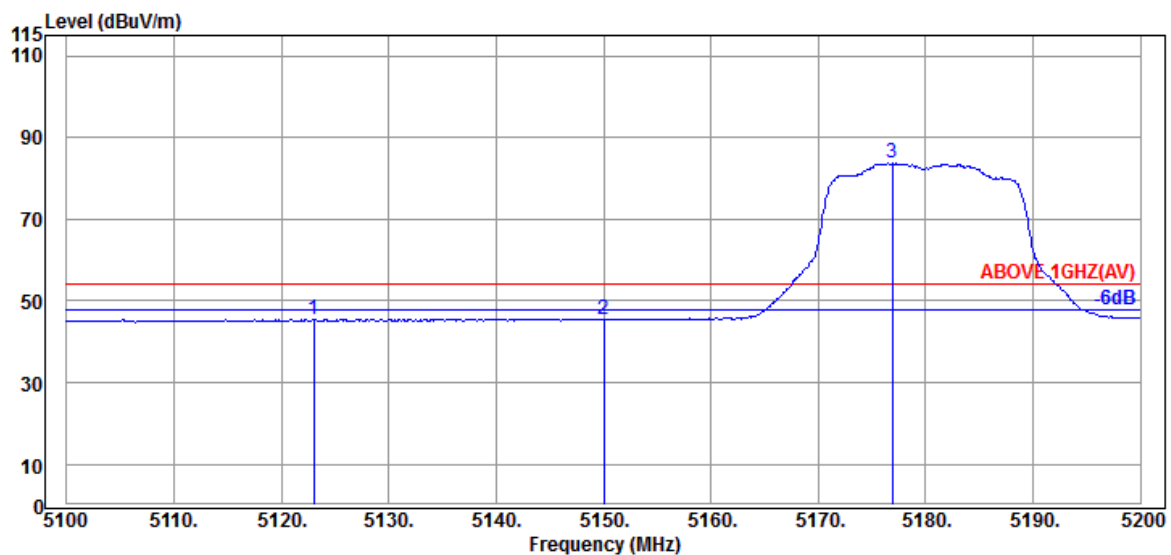

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5123.000	34.13	10.70	34.36	35.08	45.55	54.00	8.45	Average
5150.000	34.20	10.70	34.35	34.79	45.34	54.00	8.66	Average
@ 5176.900	34.20	10.72	34.34	73.19	83.77	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11n-HT20	U-NII Band	I
		Frequency	TX 5180MHz

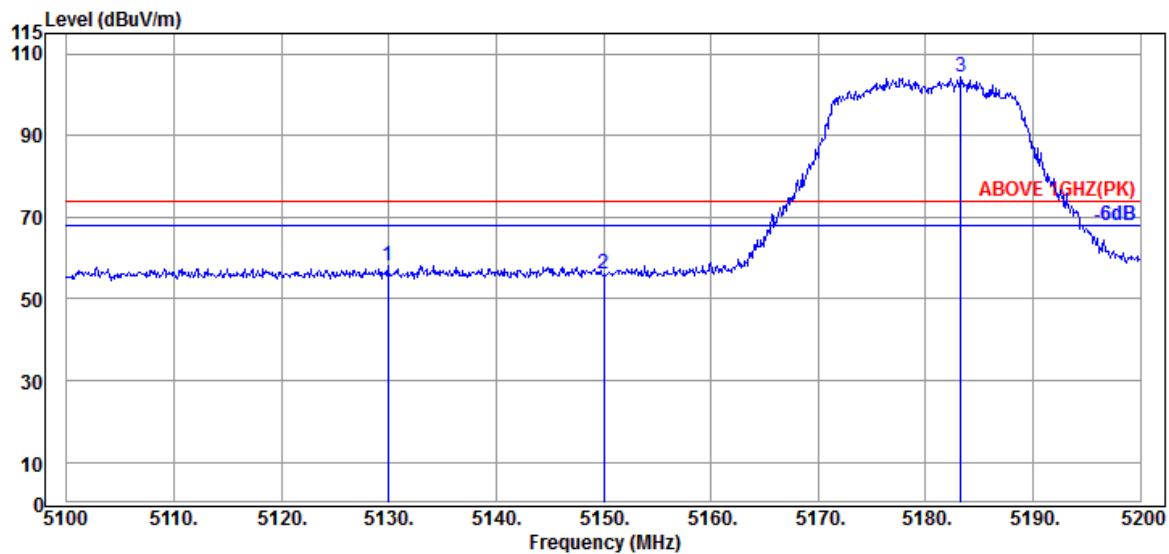

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5129.900	34.17	10.70	34.36	47.59	58.10	74.00	15.90	Peak
5150.000	34.20	10.70	34.35	45.37	55.92	74.00	18.08	Peak
@ 5183.300	34.20	10.72	34.34	93.77	104.35	---	---	Peak

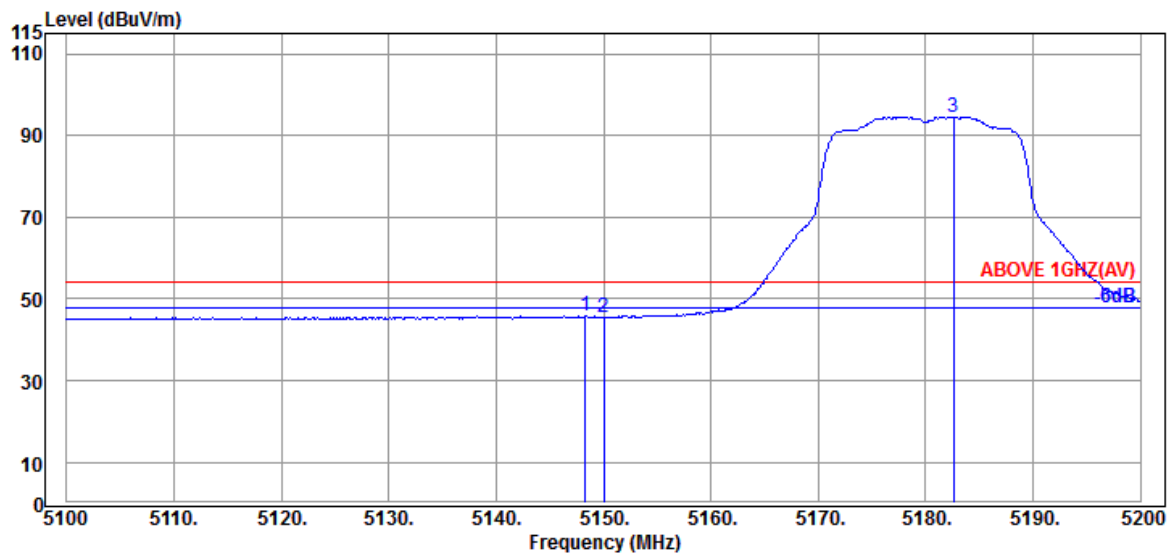

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5148.300	34.20	10.70	34.35	35.25	45.80	54.00	8.20	Average
5150.000	34.20	10.70	34.35	35.03	45.58	54.00	8.42	Average
@ 5182.600	34.20	10.72	34.34	84.05	94.63	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

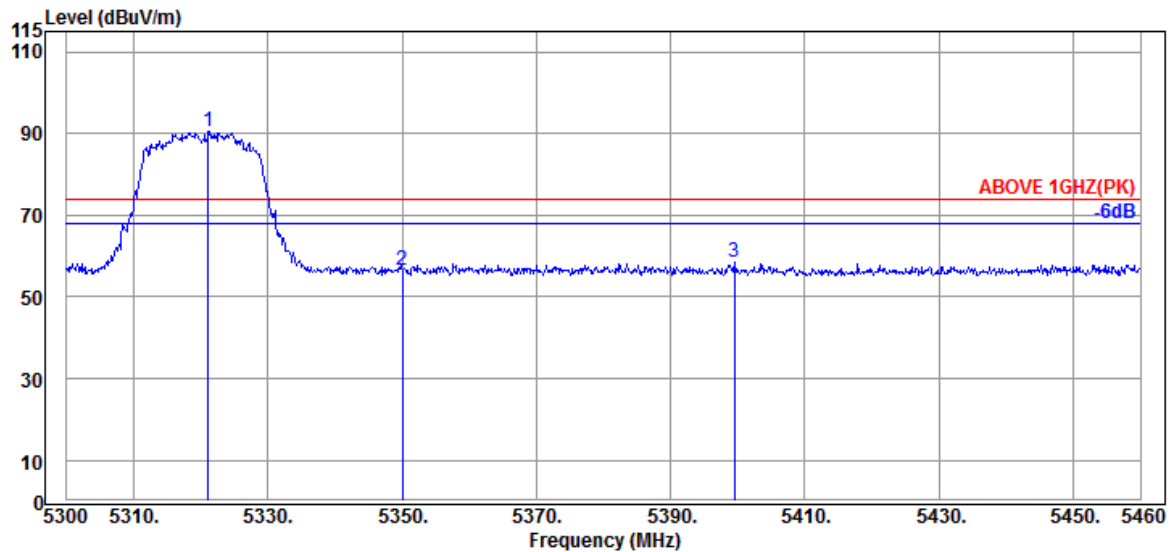

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.120	34.53	10.81	34.29	79.59	90.64	---	---	Peak
5350.080	34.60	10.83	34.27	45.20	56.36	74.00	17.64	Peak
5399.520	34.70	10.87	34.26	47.04	58.35	74.00	15.65	Peak

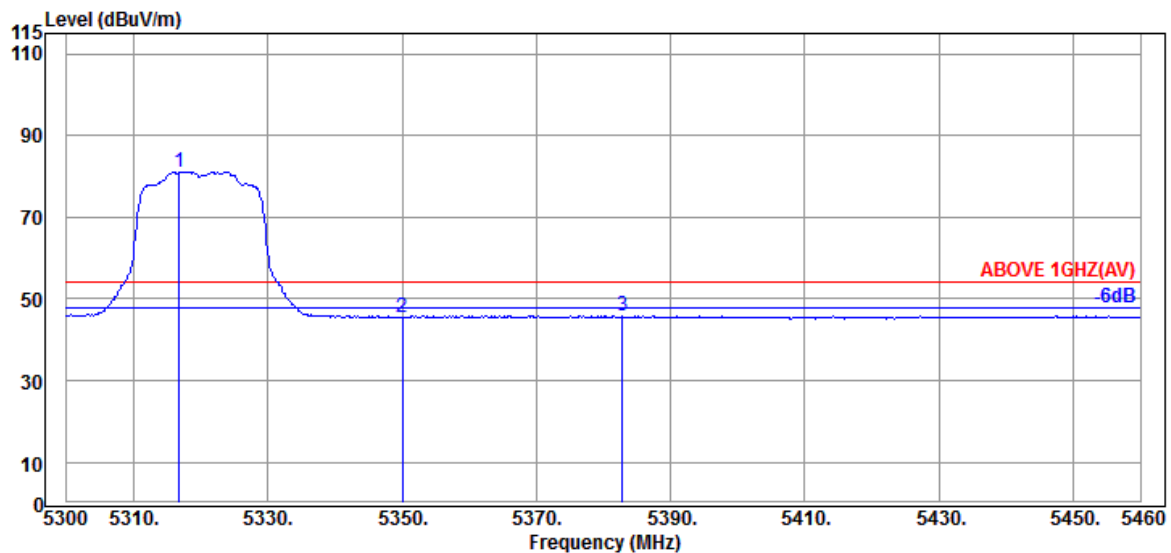

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.800	34.53	10.81	34.29	70.12	81.17	---	---	Average
5350.080	34.60	10.83	34.27	34.35	45.51	54.00	8.49	Average
5382.880	34.67	10.85	34.27	34.71	45.96	54.00	8.04	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

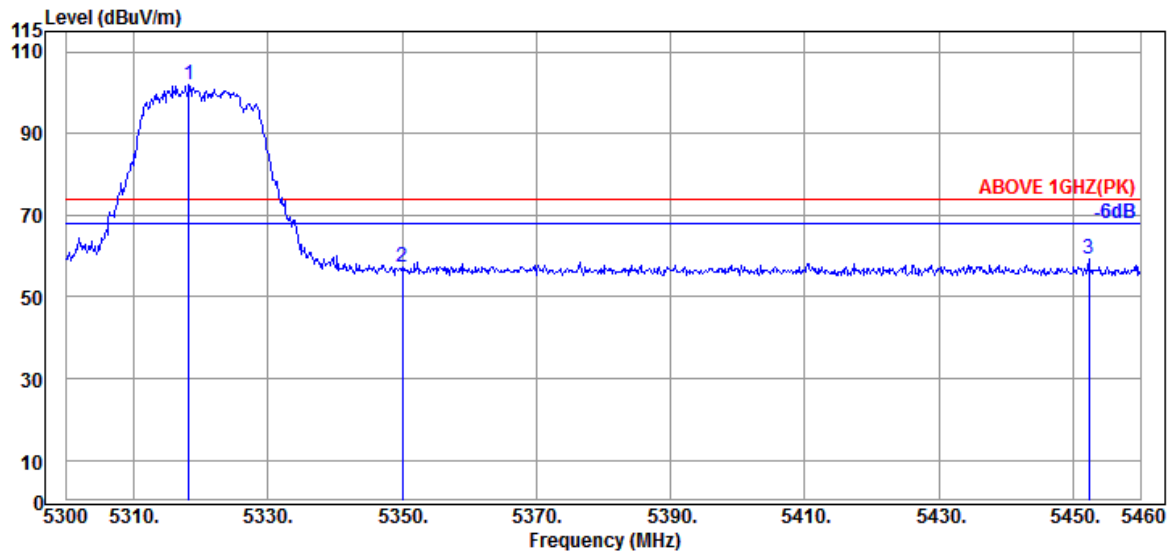

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.240	34.53	10.81	34.29	90.89	101.94	---	---	Peak
5350.080	34.60	10.83	34.27	45.98	57.14	74.00	16.86	Peak
5452.320	34.50	10.89	34.24	47.94	59.09	74.00	14.91	Peak

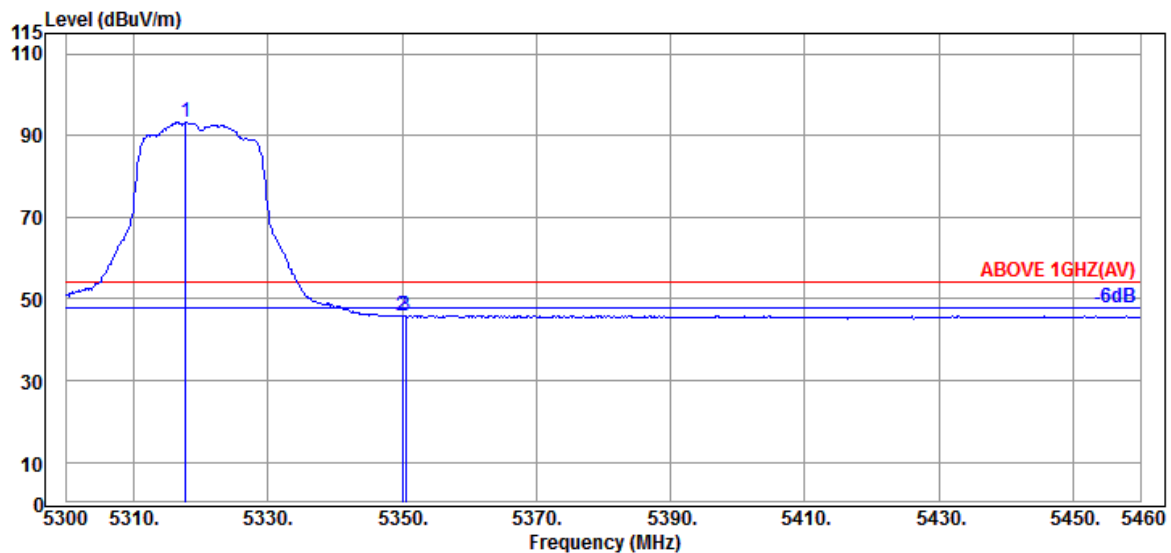

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.760	34.53	10.81	34.29	82.19	93.24	---	---	Average
5350.080	34.60	10.83	34.27	34.56	45.72	54.00	8.28	Average
5350.560	34.60	10.83	34.27	34.81	45.97	54.00	8.03	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

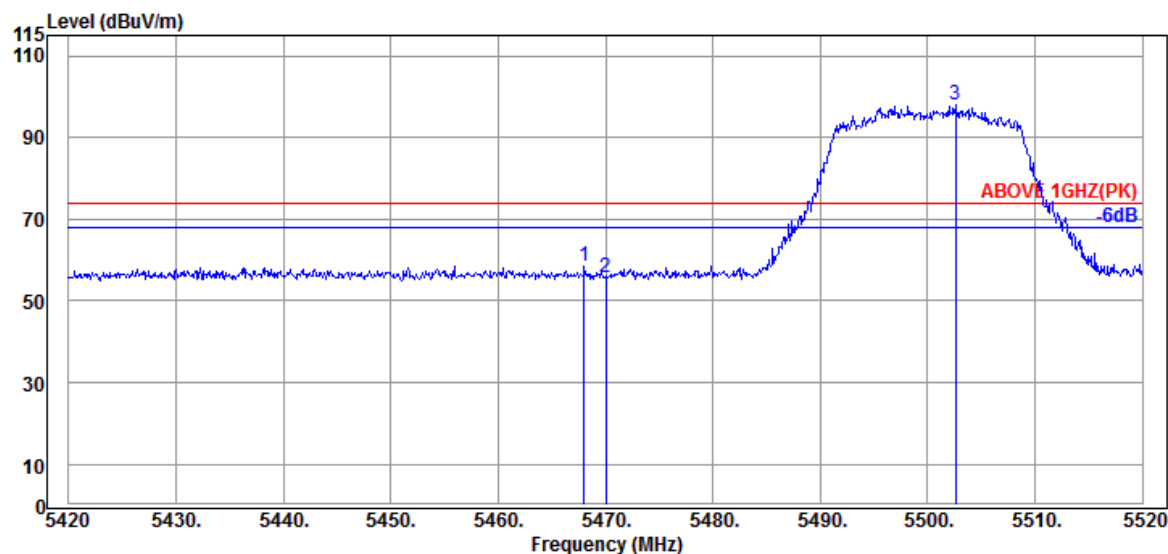

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.000	34.47	10.91	34.24	47.36	58.50	74.00	15.50	Peak
5470.000	34.47	10.91	34.24	44.55	55.69	74.00	18.31	Peak
@ 5502.600	34.40	10.93	34.24	86.73	97.82	---	---	Peak

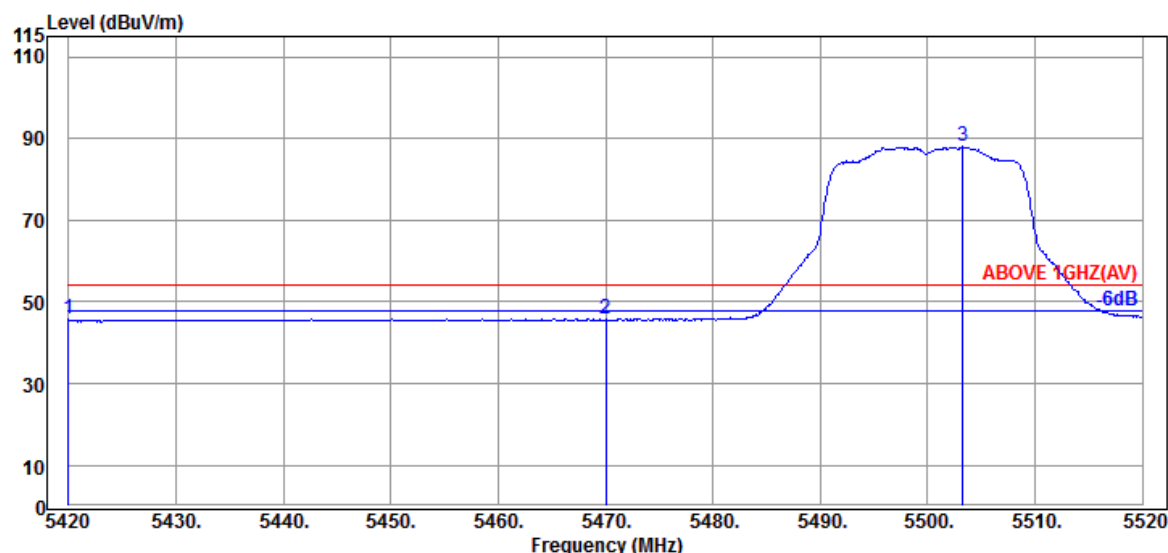

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5420.000	34.60	10.87	34.26	34.70	45.91	54.00	8.09	Average
5470.000	34.47	10.91	34.24	34.59	45.73	54.00	8.27	Average
@ 5503.300	34.40	10.93	34.24	76.96	88.05	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

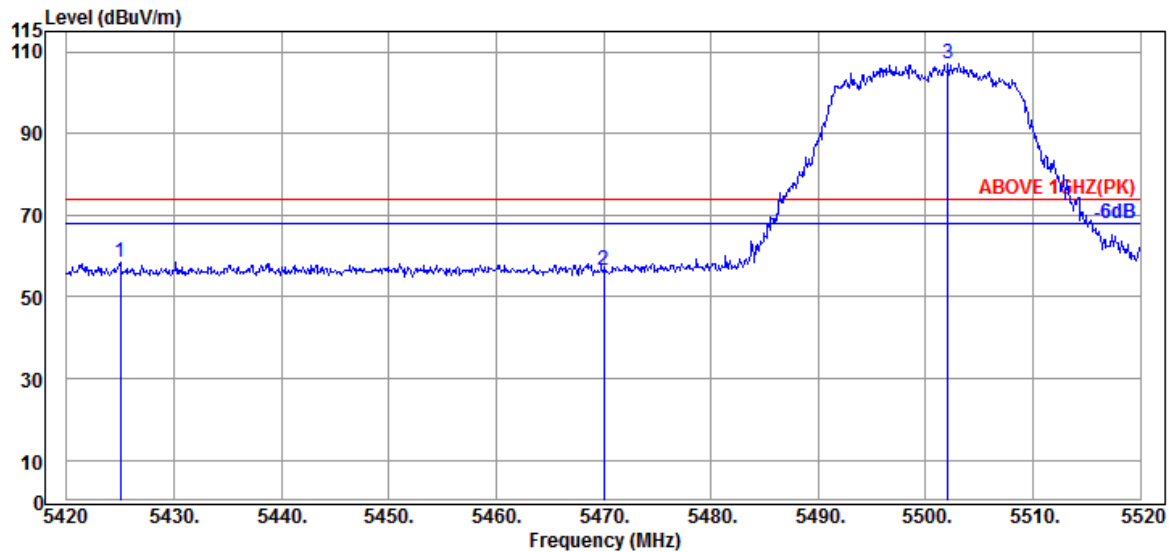

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5425.000	34.60	10.89	34.25	47.36	58.60	74.00	15.40	Peak
5470.000	34.47	10.91	34.24	45.28	56.42	74.00	17.58	Peak
@ 5502.100	34.40	10.93	34.24	96.05	107.14	---	---	Peak

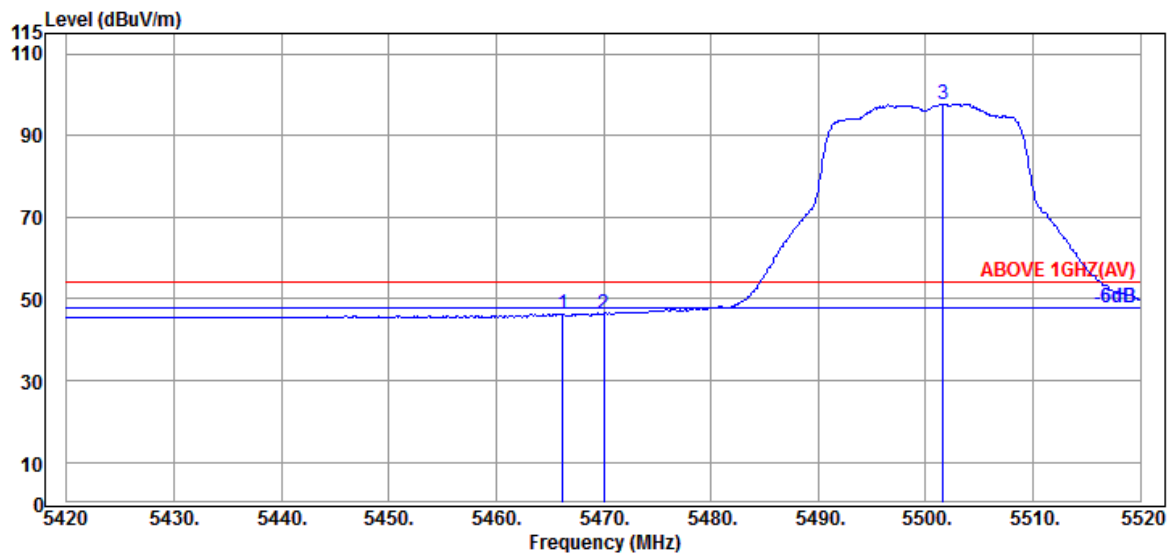

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.200	34.47	10.91	34.24	35.17	46.31	54.00	7.69	Average
5470.000	34.47	10.91	34.24	35.14	46.28	54.00	7.72	Average
@ 5501.600	34.40	10.93	34.24	86.62	97.71	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5700MHz

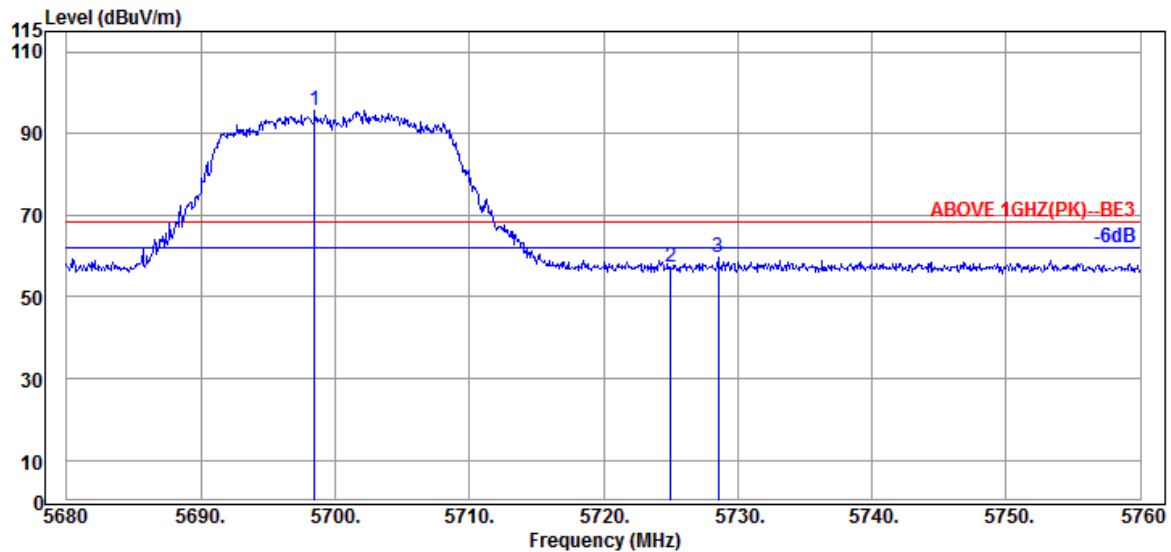

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5698.480	34.40	11.03	34.31	84.65	95.77	---	---	Peak
	5725.040	34.67	11.05	34.32	45.95	57.35	68.20	10.85	Peak
	5728.560	34.67	11.05	34.32	48.16	59.56	68.20	8.64	Peak

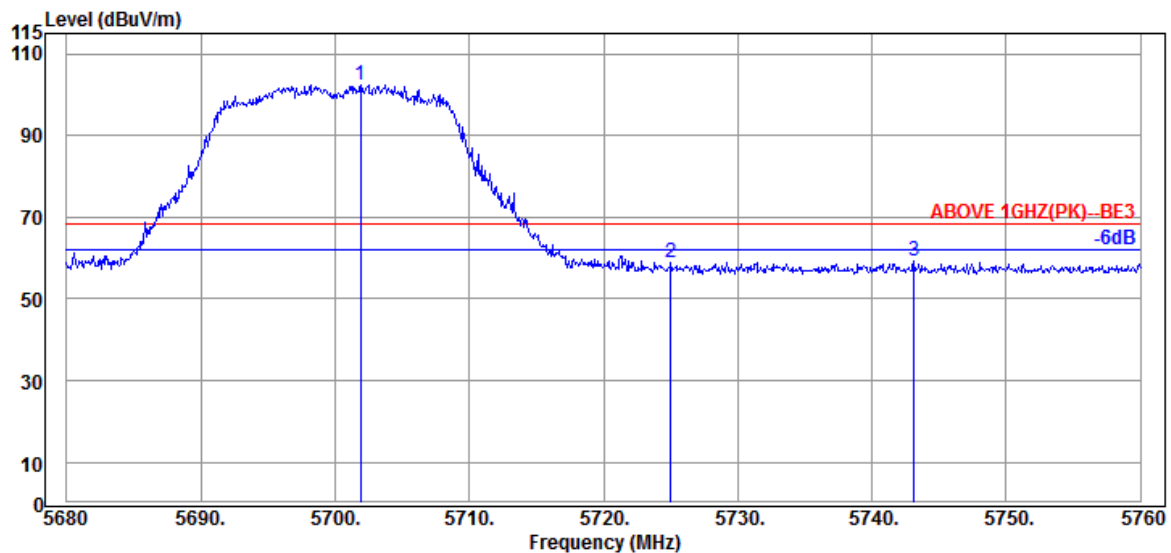

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5701.920	34.40	11.03	34.31	91.33	102.45	---	---	Peak
	5725.040	34.67	11.05	34.32	47.55	58.95	68.20	9.25	Peak
	5743.120	34.80	11.05	34.33	47.92	59.44	68.20	8.76	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

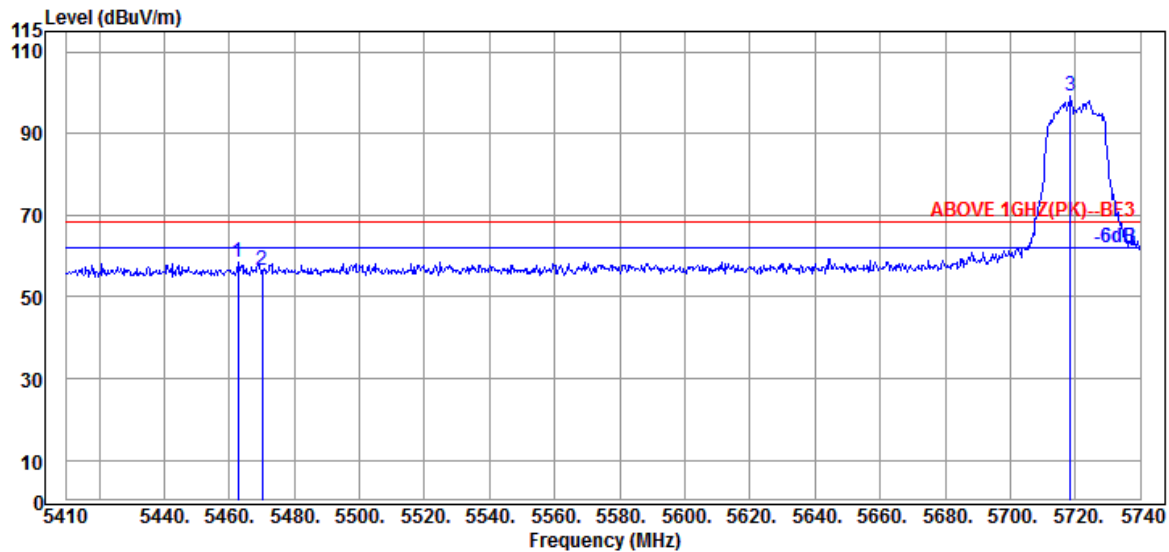

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.800	34.50	10.91	34.24	47.18	58.35	68.20	9.85	Peak
5470.060	34.47	10.91	34.24	45.20	56.34	68.20	11.86	Peak
@ 5718.550	34.53	11.05	34.32	87.95	99.21	---	---	Peak

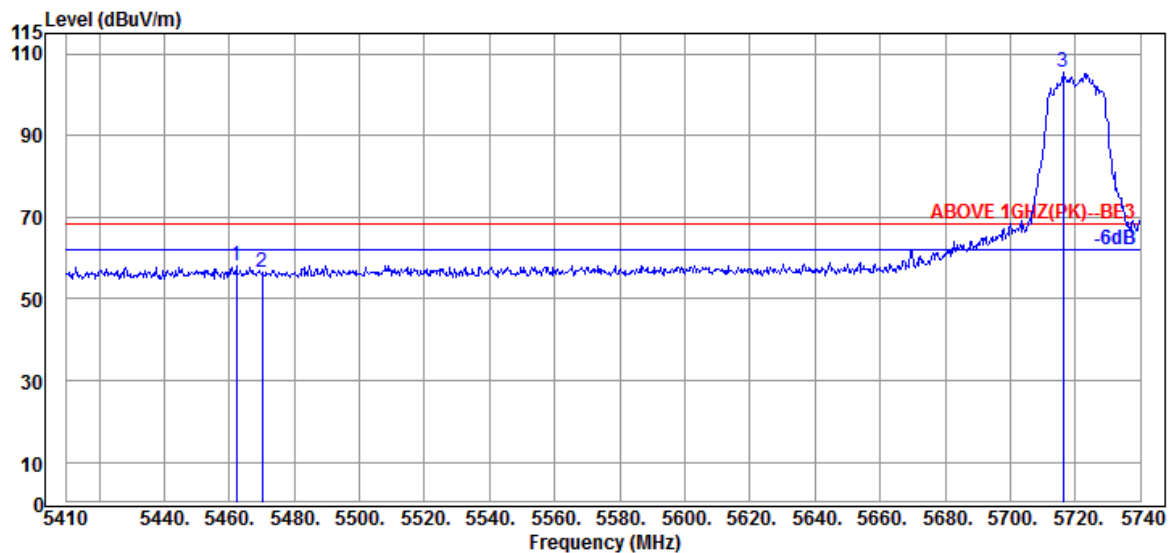

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.140	34.50	10.91	34.24	46.92	58.09	68.20	10.11	Peak
5470.060	34.47	10.91	34.24	45.20	56.34	68.20	11.86	Peak
@ 5716.240	34.53	11.05	34.32	94.42	105.68	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

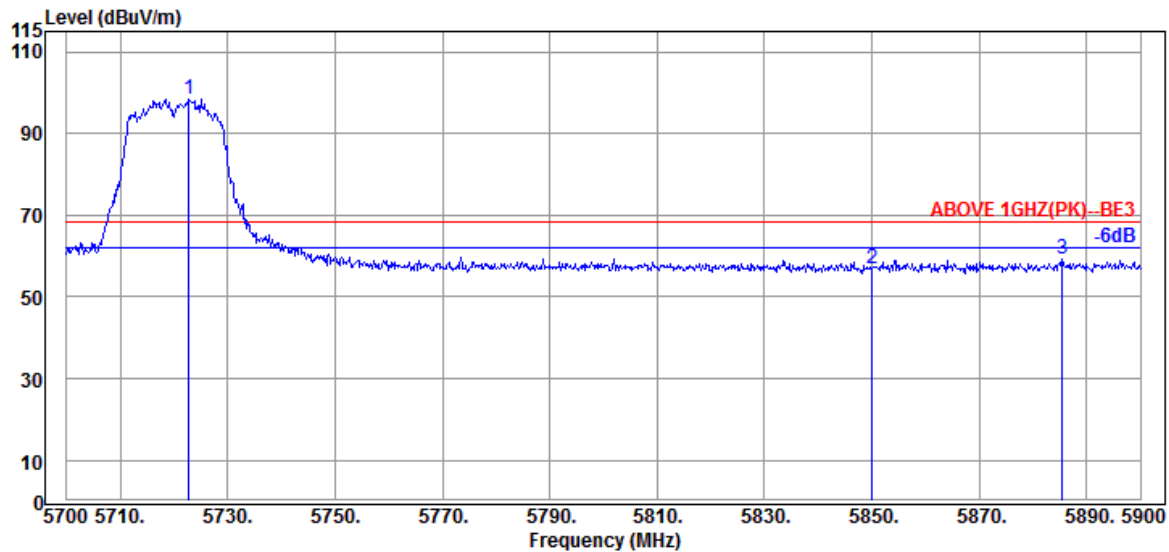

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5722.800	34.67	11.05	34.32	87.17	98.57	---	---	Peak
	5850.000	35.10	11.10	34.38	44.93	56.75	68.20	11.45	Peak
	5885.400	35.30	11.12	34.40	47.28	59.30	68.20	8.90	Peak

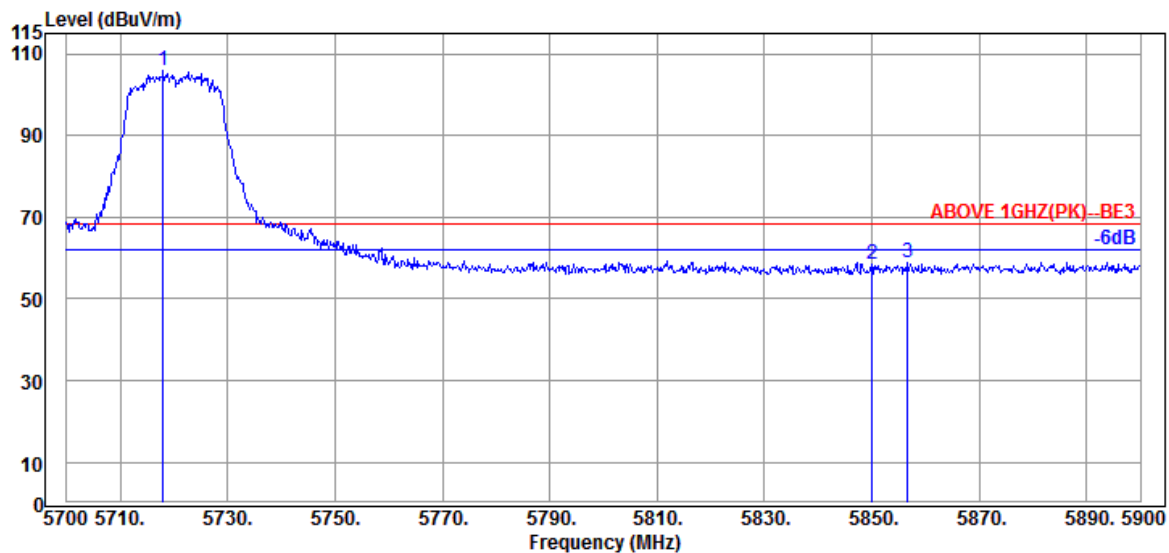

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5718.000	34.53	11.05	34.32	94.77	106.03	---	---	Peak
	5850.000	35.10	11.10	34.38	46.54	58.36	68.20	9.84	Peak
	5856.600	35.20	11.10	34.38	47.05	58.97	68.20	9.23	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,


New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	III
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

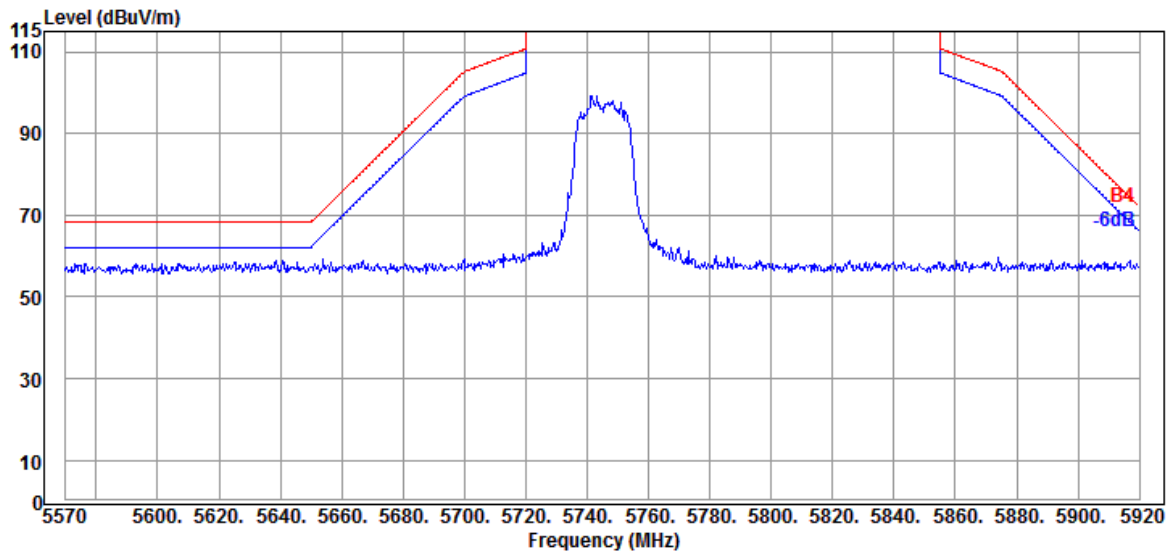

Antenna at Vertical Polarization

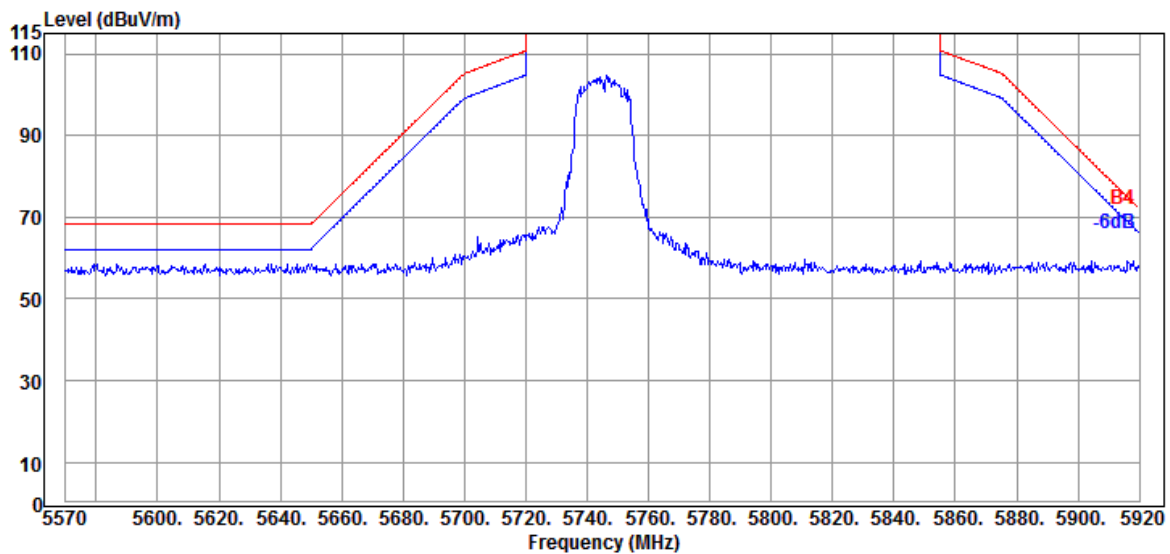


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	III
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

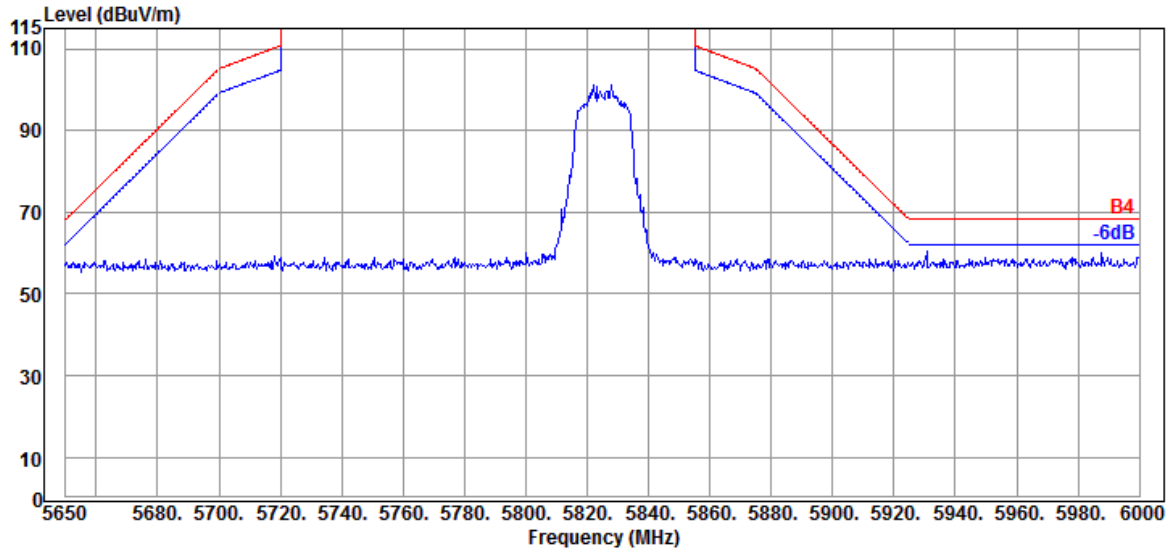

Antenna at Vertical Polarization

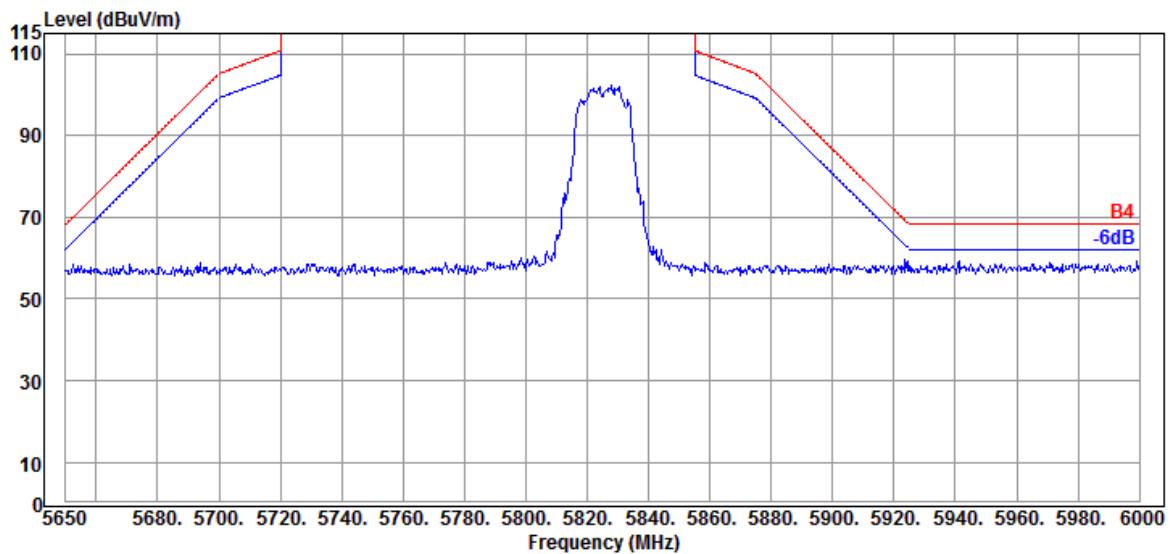


Mode	802.11n-HT40	U-NII Band	I
		Frequency	TX 5190MHz

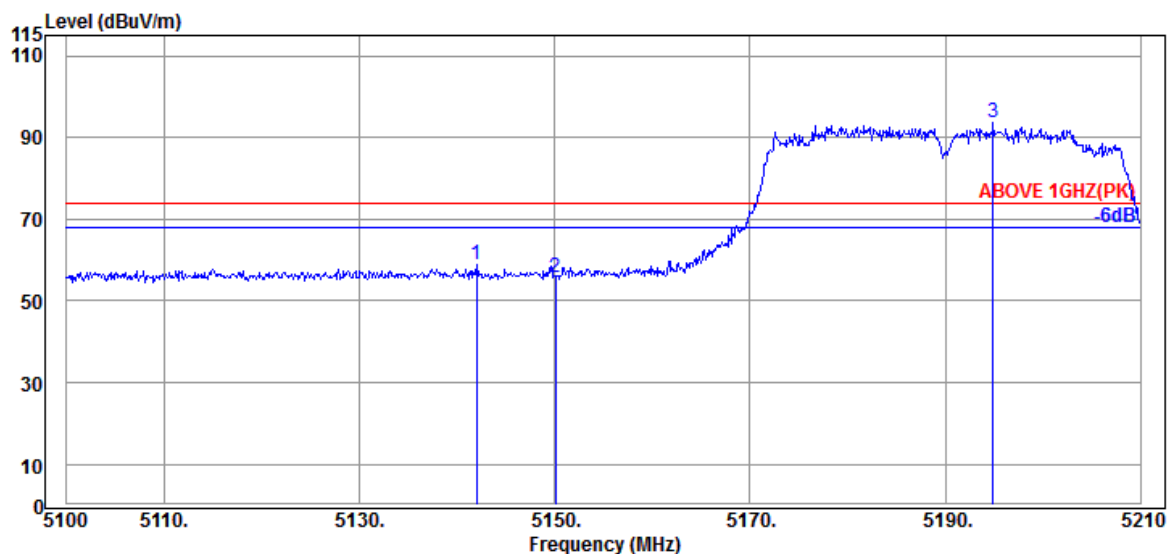

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.020	34.20	10.70	34.36	48.27	58.81	74.00	15.19	Peak
5150.050	34.20	10.70	34.35	45.37	55.92	74.00	18.08	Peak
@ 5194.930	34.20	10.74	34.33	82.95	93.56	---	---	Peak

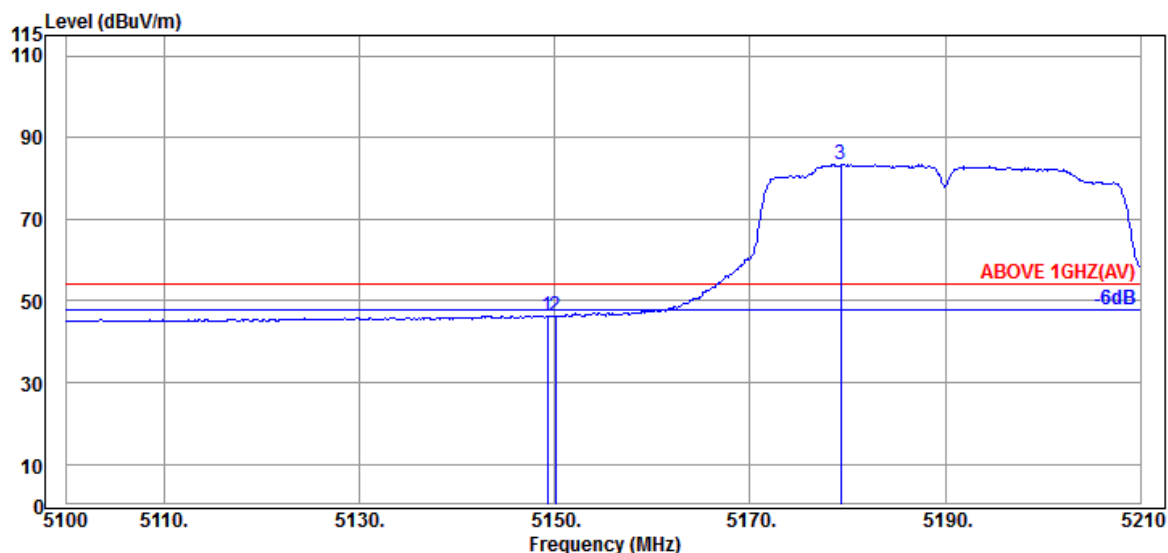


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.280	34.20	10.70	34.35	35.85	46.40	54.00	7.60	Average
5150.050	34.20	10.70	34.35	35.80	46.35	54.00	7.65	Average
@ 5179.310	34.20	10.72	34.34	72.82	83.40	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	I
		Frequency	TX 5190MHz

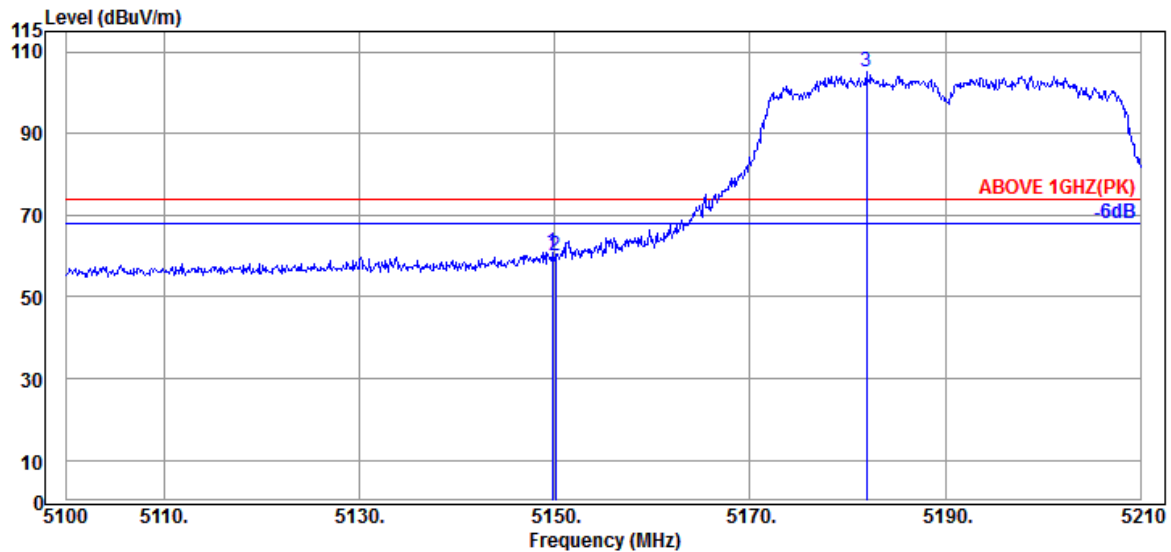

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.720	34.20	10.70	34.35	50.32	60.87	74.00	13.13	Peak
5150.050	34.20	10.70	34.35	49.33	59.88	74.00	14.12	Peak
@ 5181.950	34.20	10.72	34.34	94.35	104.93	---	---	Peak

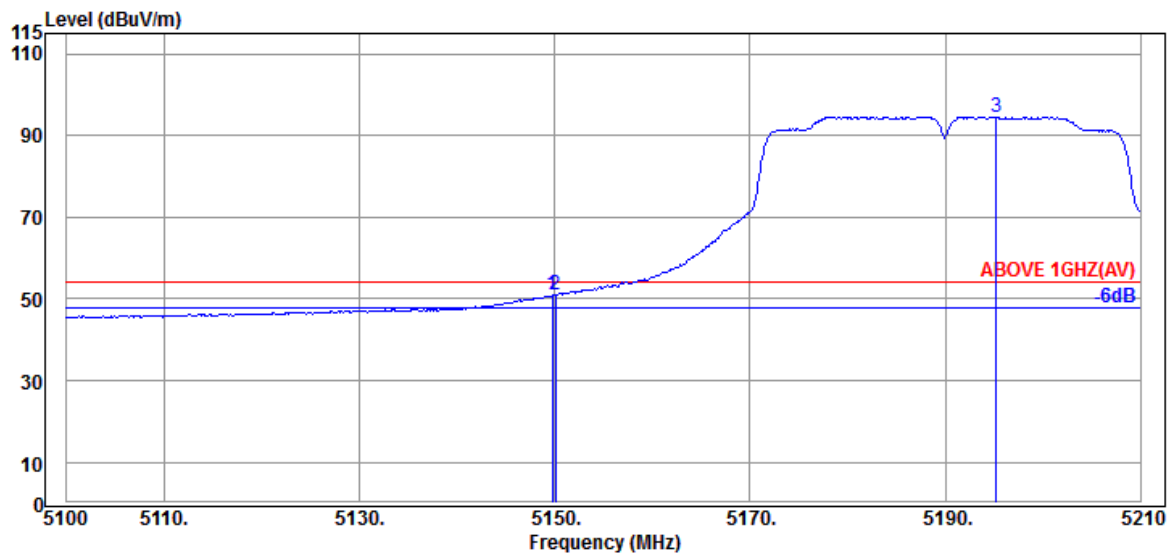

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.720	34.20	10.70	34.35	40.39	50.94	54.00	3.06	Average
5150.050	34.20	10.70	34.35	40.31	50.86	54.00	3.14	Average
@ 5195.260	34.20	10.74	34.33	84.02	94.63	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

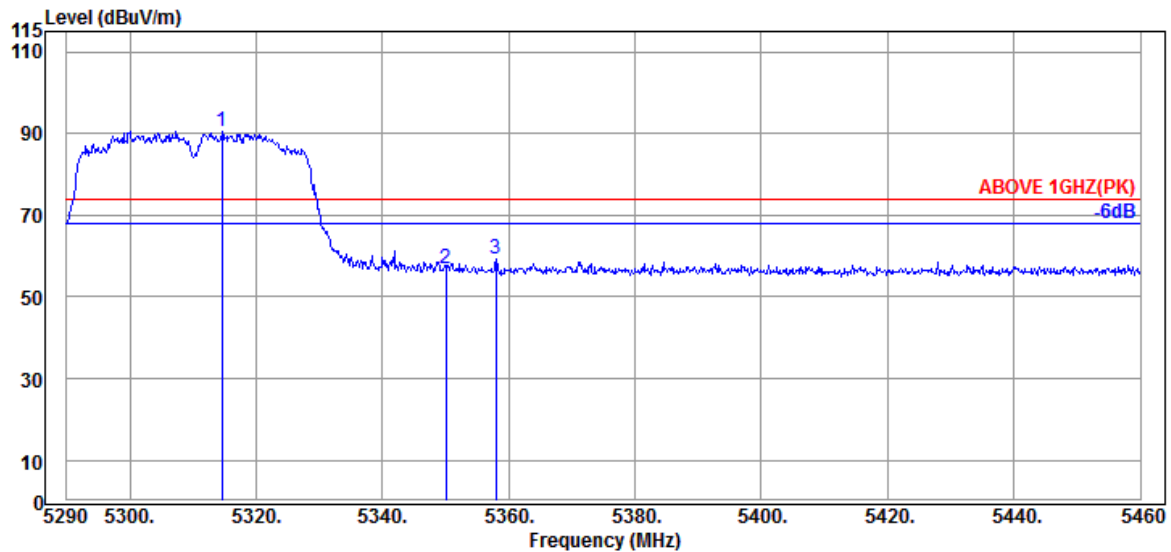

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5314.650	34.53	10.81	34.29	79.58	90.63	---	---	Peak
5350.010	34.60	10.83	34.27	45.59	56.75	74.00	17.25	Peak
5358.000	34.63	10.85	34.27	48.07	59.28	74.00	14.72	Peak

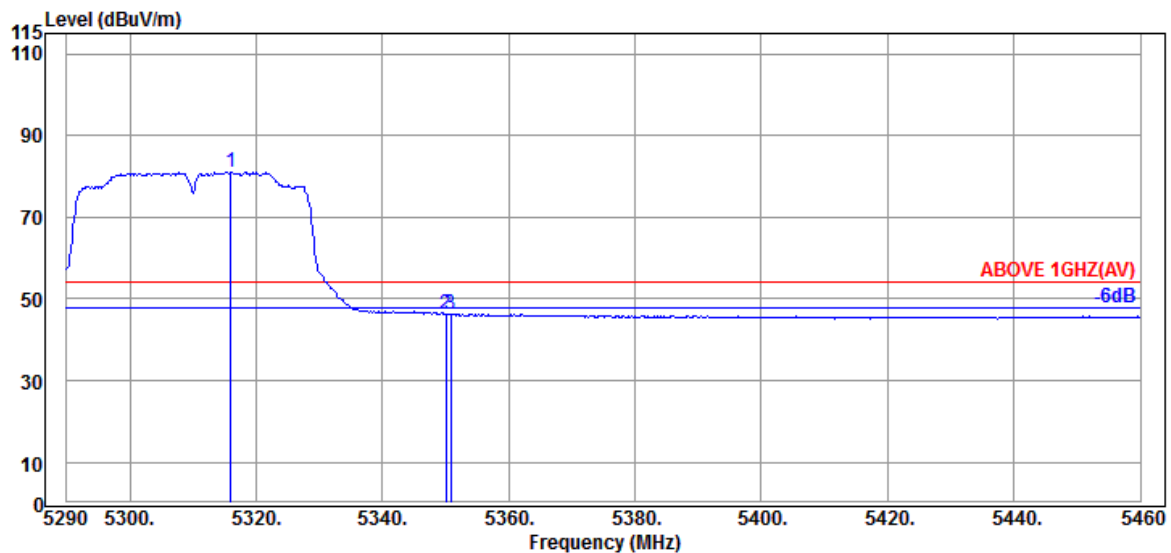

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.010	34.53	10.81	34.29	69.98	81.03	---	---	Average
5350.010	34.60	10.83	34.27	35.22	46.38	54.00	7.62	Average
5350.860	34.60	10.83	34.27	35.21	46.37	54.00	7.63	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

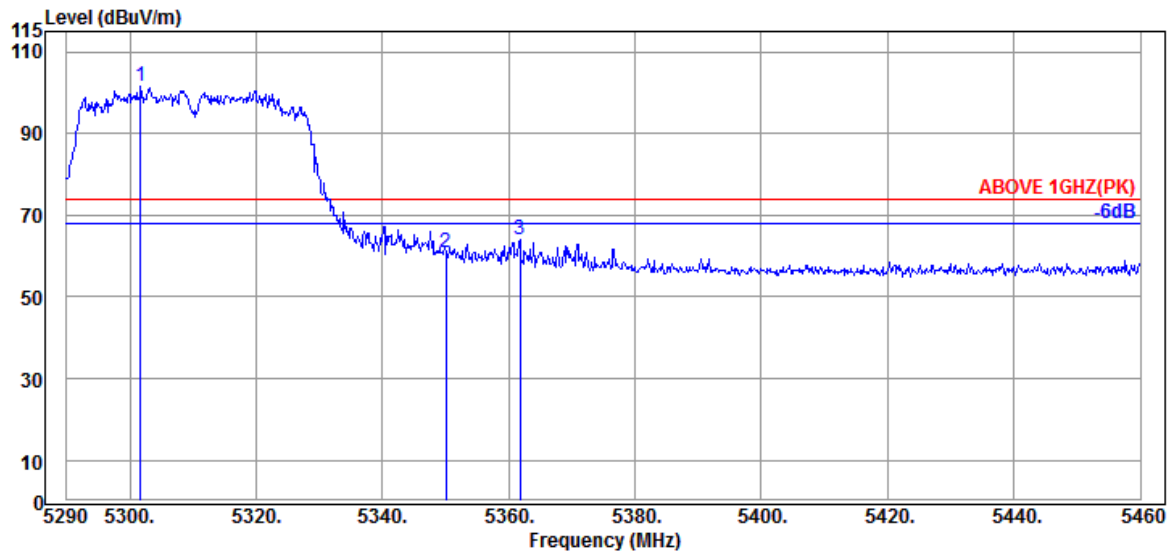

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.730	34.50	10.81	34.29	90.67	101.69	---	---	Peak
5350.010	34.60	10.83	34.27	49.76	60.92	74.00	13.08	Peak
5361.740	34.63	10.85	34.27	52.86	64.07	74.00	9.93	Peak

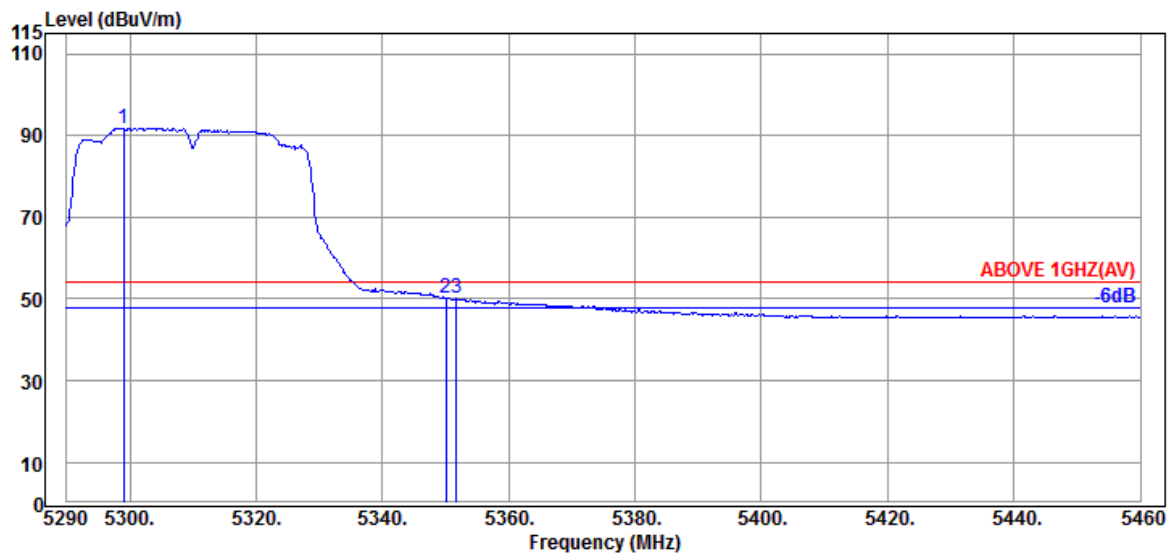

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5299.010	34.50	10.81	34.29	80.82	91.84	---	---	Average
5350.010	34.60	10.83	34.27	39.08	50.24	54.00	3.76	Average
5351.710	34.60	10.83	34.27	39.10	50.26	54.00	3.74	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

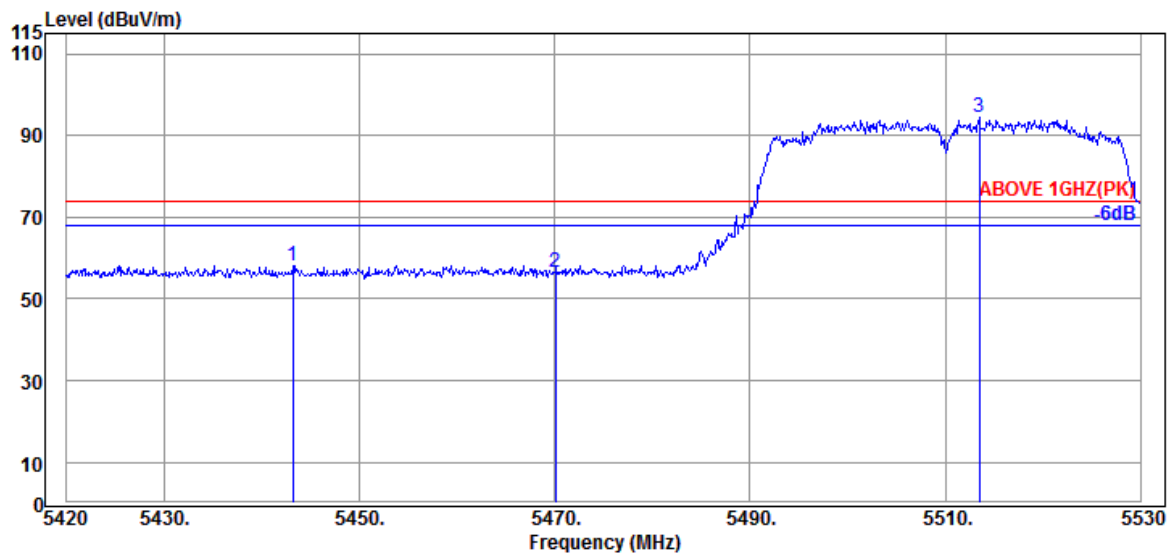

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5443.210	34.55	10.89	34.25	47.06	58.25	74.00	15.75	Peak
5470.050	34.47	10.91	34.24	45.56	56.70	74.00	17.30	Peak
@ 5513.500	34.37	10.93	34.24	83.40	94.46	---	---	Peak

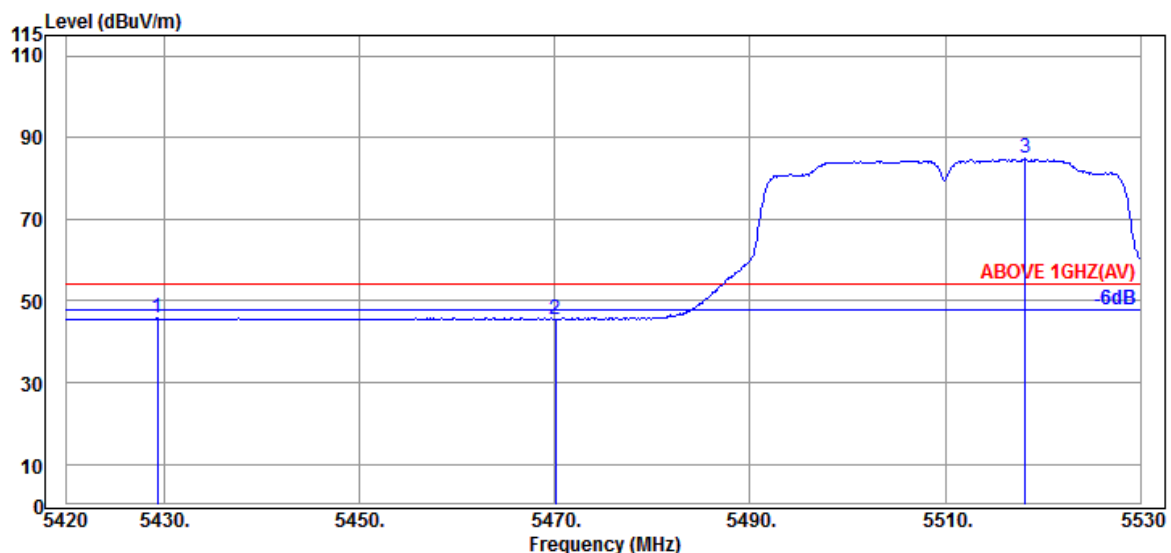

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5429.350	34.60	10.89	34.25	34.60	45.84	54.00	8.16	Average
5470.050	34.47	10.91	34.24	34.38	45.52	54.00	8.48	Average
@ 5518.230	34.37	10.93	34.24	73.72	84.78	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

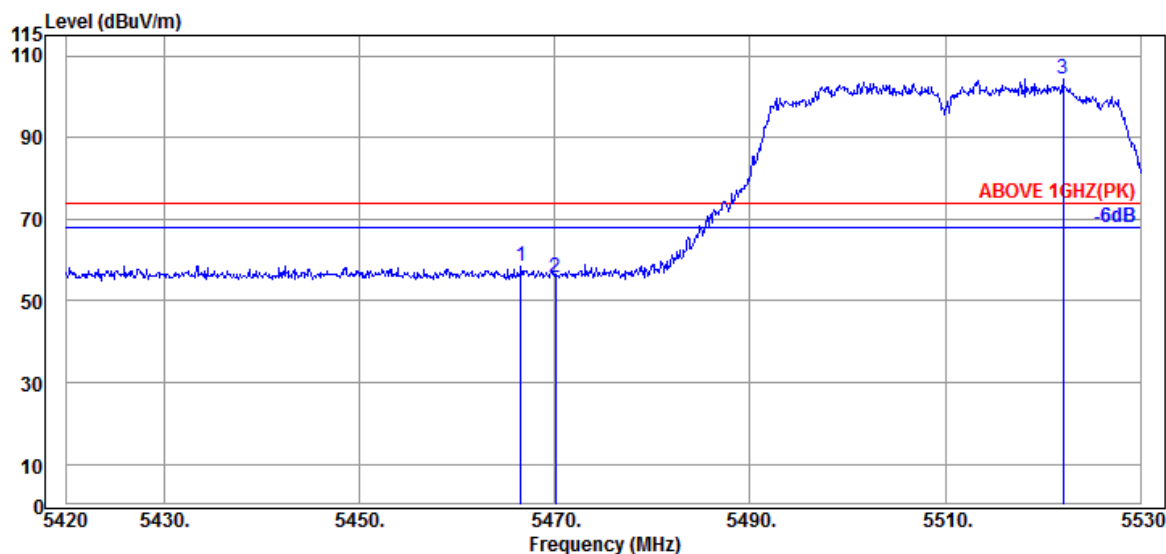

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.530	34.47	10.91	34.24	47.48	58.62	74.00	15.38	Peak
5470.050	34.47	10.91	34.24	44.39	55.53	74.00	18.47	Peak
@ 5522.080	34.37	10.93	34.24	93.28	104.34	---	---	Peak

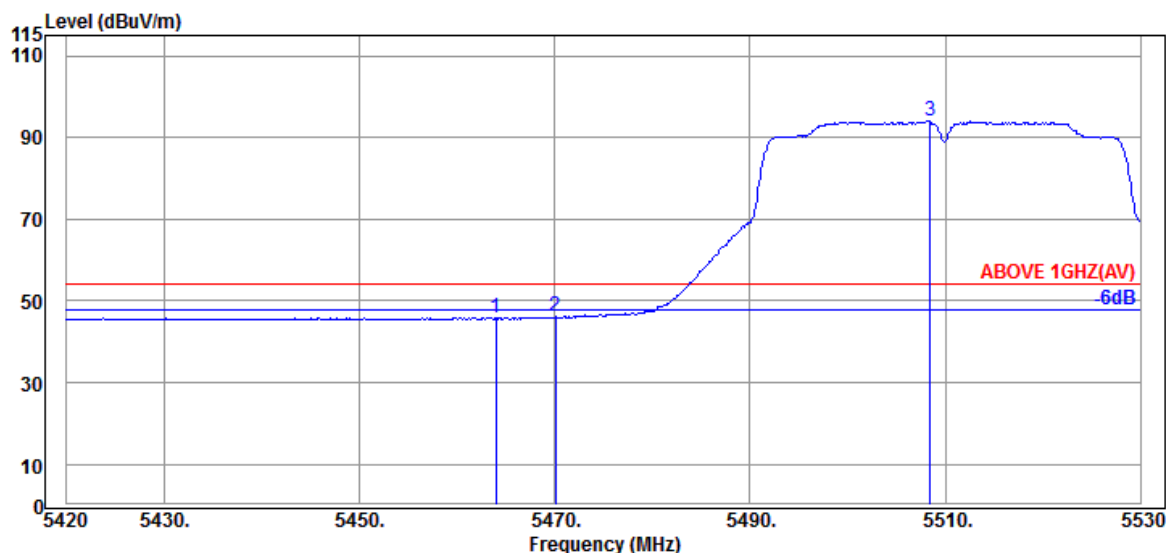

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.000	34.47	10.91	34.24	34.84	45.98	54.00	8.02	Average
5470.050	34.47	10.91	34.24	35.19	46.33	54.00	7.67	Average
@ 5508.440	34.40	10.93	34.24	82.86	93.95	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5670MHz

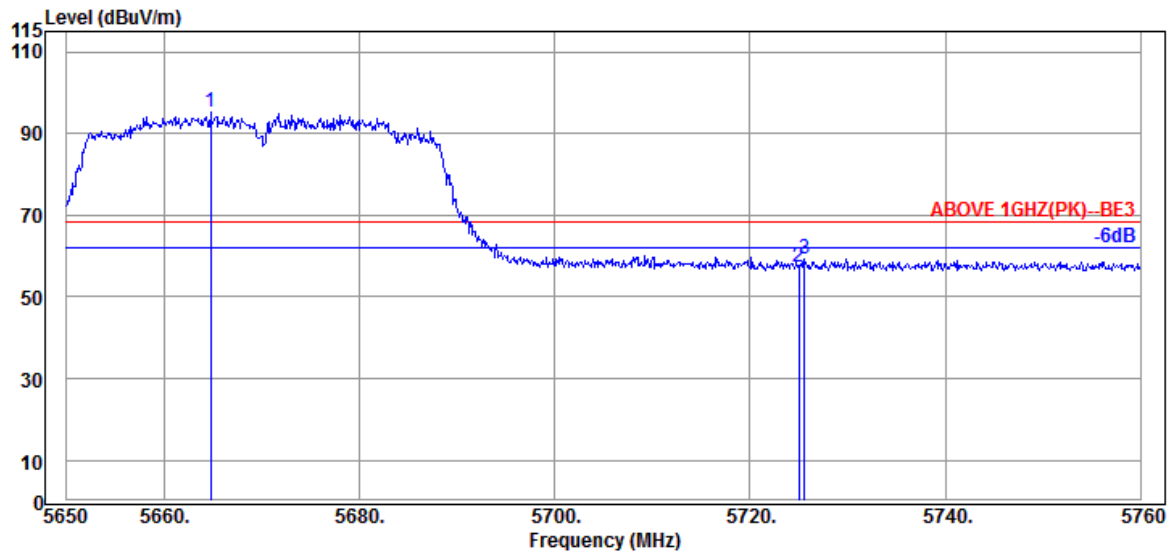

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5664.740	34.40	11.01	34.30	84.14	95.25	---	---	Peak
	5725.020	34.67	11.05	34.32	45.83	57.23	68.20	10.97	Peak
	5725.570	34.67	11.05	34.32	47.75	59.15	68.20	9.05	Peak

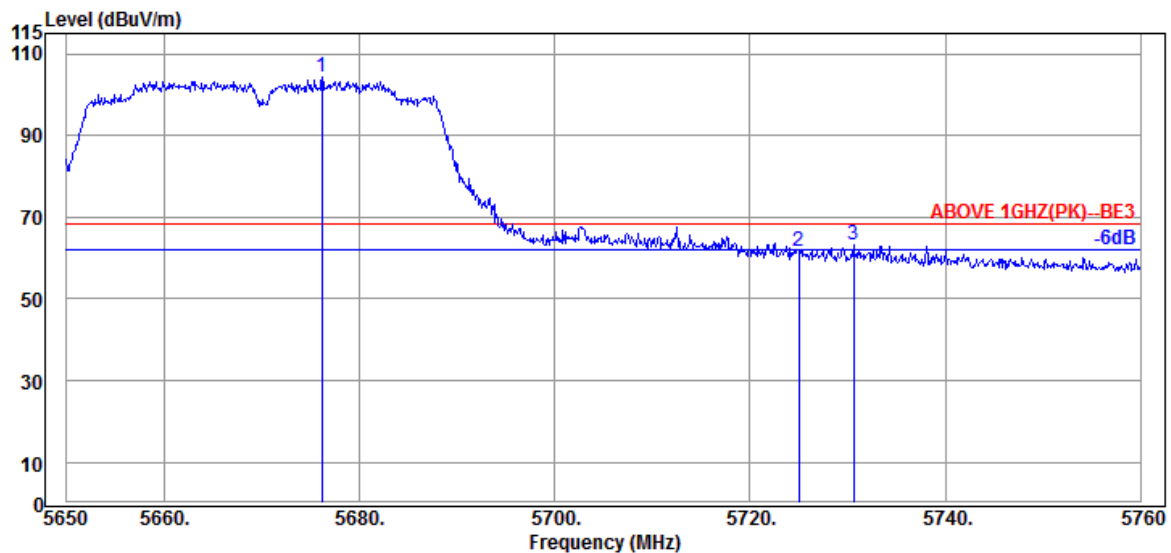

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5676.180	34.40	11.03	34.30	93.10	104.23	---	---	Peak
	5725.020	34.67	11.05	34.32	50.36	61.76	68.20	6.44	Peak
	5730.630	34.67	11.05	34.33	51.93	63.32	68.20	4.88	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

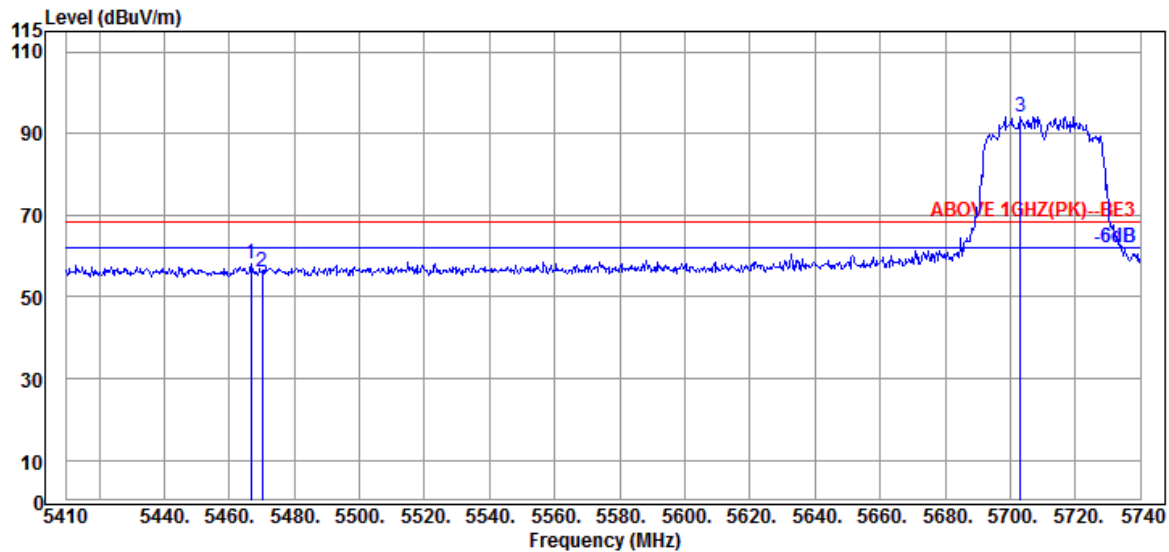

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5466.760	34.47	10.91	34.24	46.77	57.91	68.20	10.29	Peak
5470.060	34.47	10.91	34.24	44.84	55.98	68.20	12.22	Peak
@ 5703.040	34.40	11.03	34.31	83.02	94.14	---	---	Peak

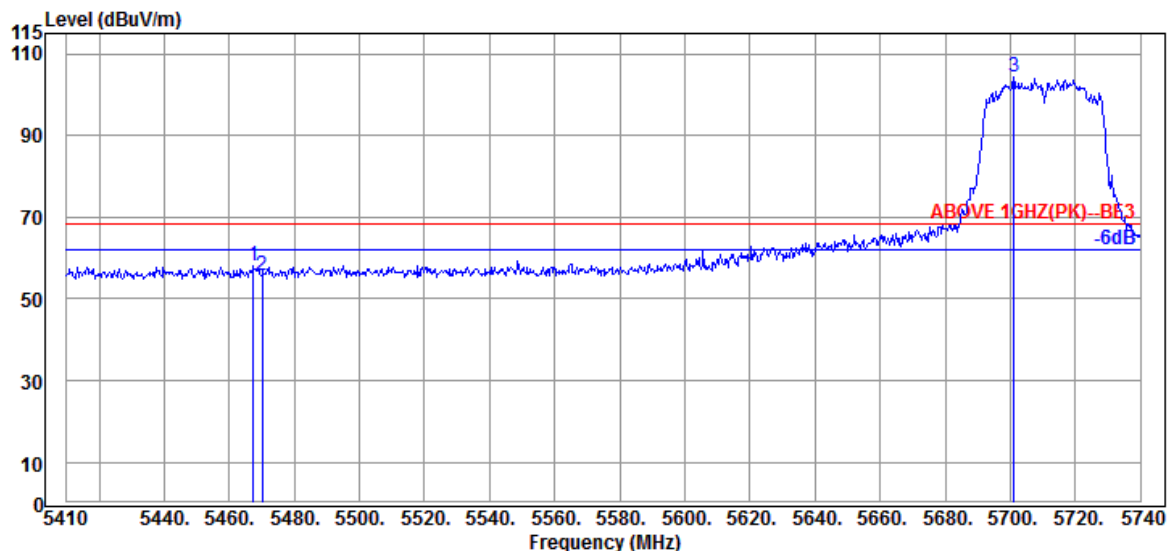

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5467.420	34.47	10.91	34.24	46.81	57.95	68.20	10.25	Peak
5470.060	34.47	10.91	34.24	44.56	55.70	68.20	12.50	Peak
@ 5701.060	34.40	11.03	34.31	93.23	104.35	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

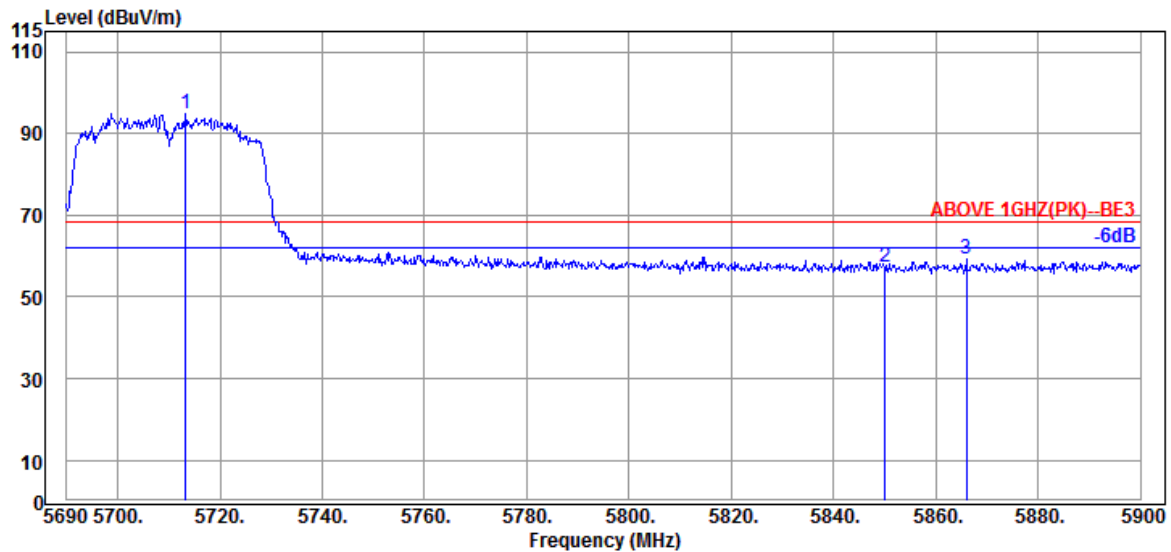

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5713.310	34.53	11.05	34.32	83.73	94.99	---	---	Peak
	5850.020	35.10	11.10	34.38	45.53	57.35	68.20	10.85	Peak
	5865.980	35.20	11.12	34.39	47.24	59.17	68.20	9.03	Peak

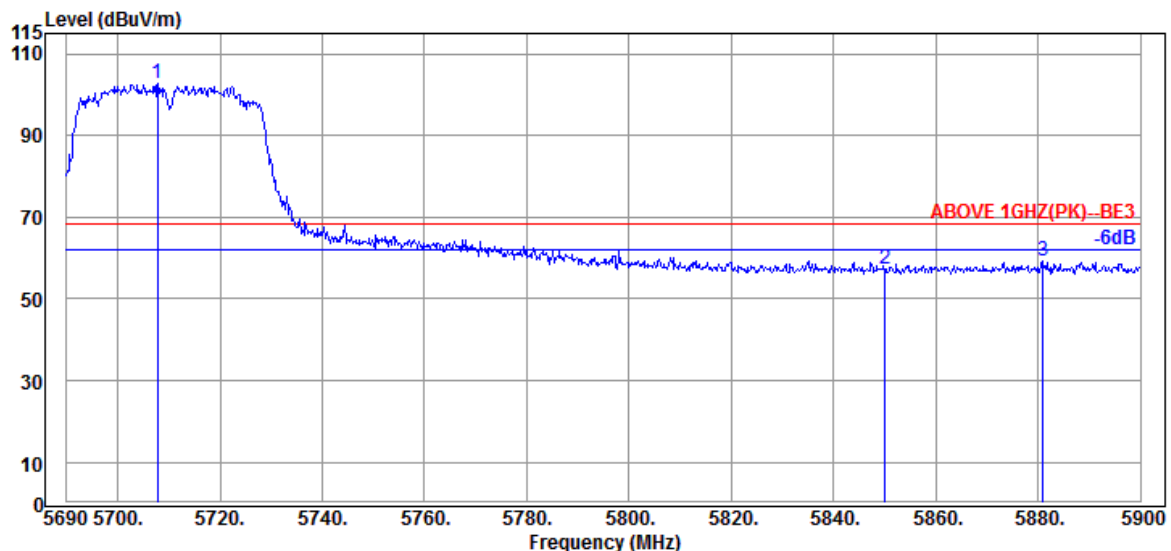

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5707.850	34.53	11.03	34.32	91.41	102.65	---	---	Peak
	5850.020	35.10	11.10	34.38	45.47	57.29	68.20	10.91	Peak
	5880.890	35.30	11.12	34.39	47.32	59.35	68.20	8.85	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	III
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

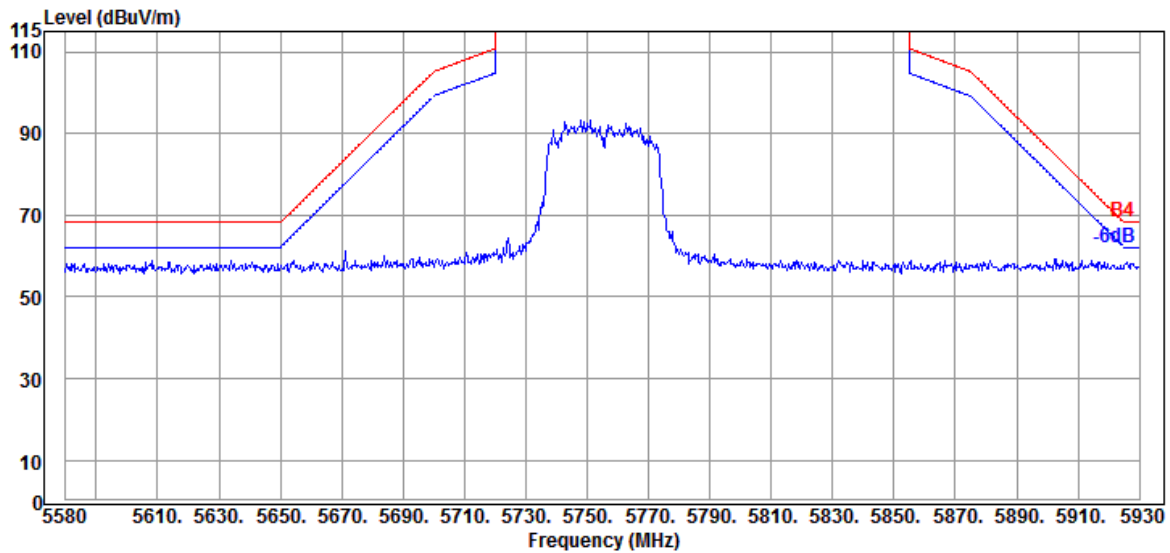

Antenna at Vertical Polarization

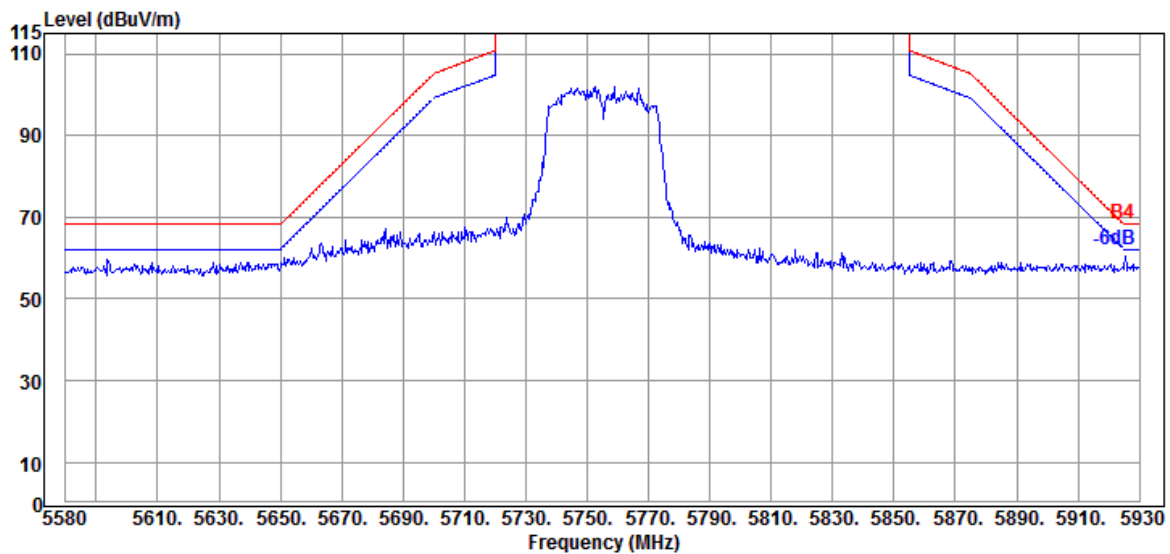


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	III
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

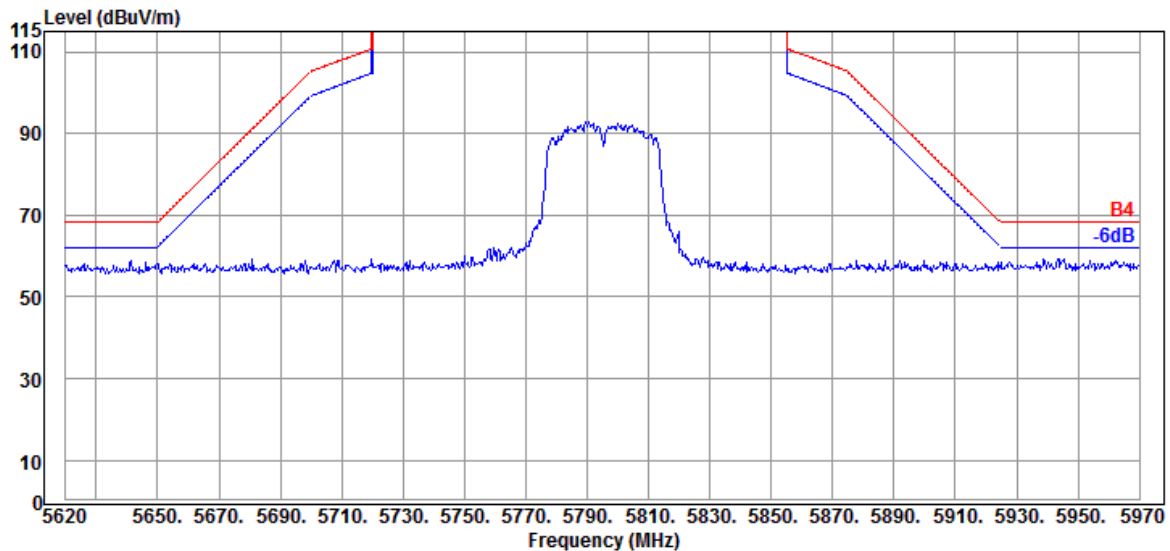

Antenna at Vertical Polarization

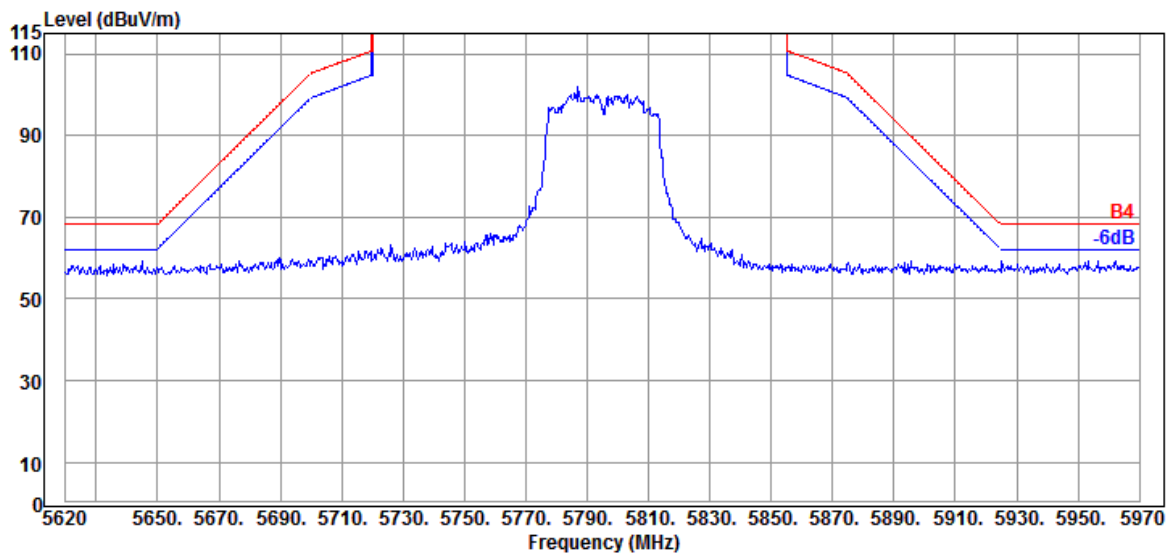

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	I
		Frequency	TX 5210MHz

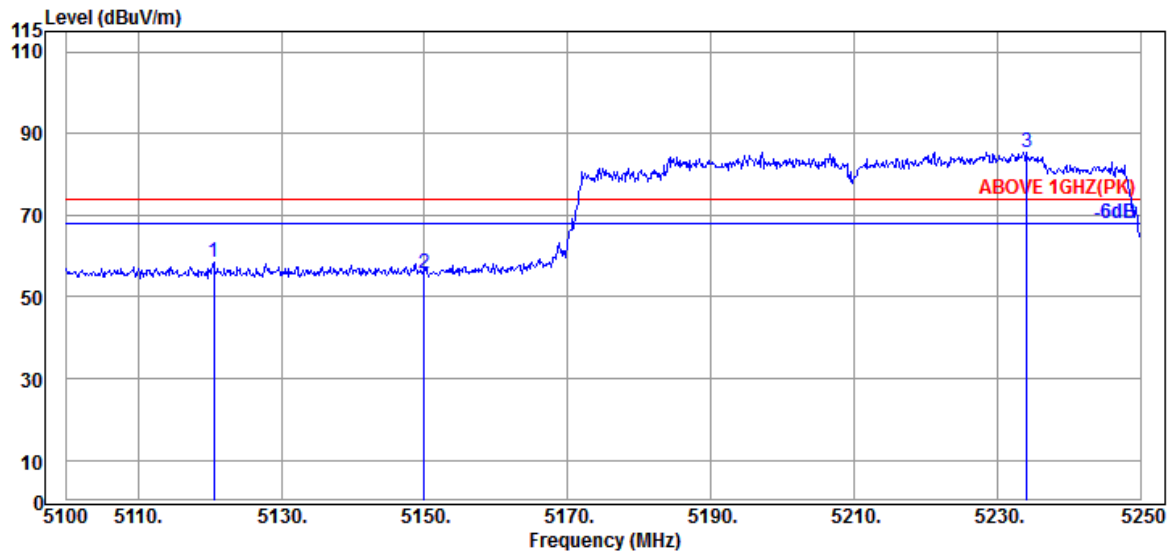

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5120.550	34.13	10.68	34.36	48.18	58.63	74.00	15.37	Peak
5149.950	34.20	10.70	34.35	45.08	55.63	74.00	18.37	Peak
@ 5234.100	34.35	10.76	34.32	74.62	85.41	---	---	Peak

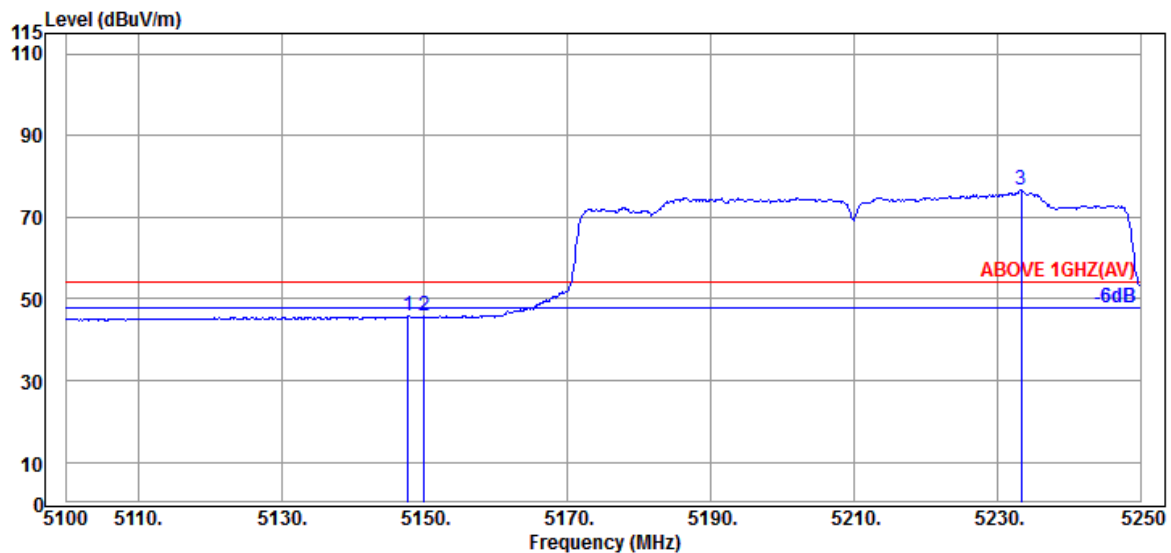

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.700	34.20	10.70	34.35	35.16	45.71	54.00	8.29	Average
5149.950	34.20	10.70	34.35	35.10	45.65	54.00	8.35	Average
@ 5233.350	34.35	10.76	34.32	65.74	76.53	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	I
		Frequency	TX 5210MHz

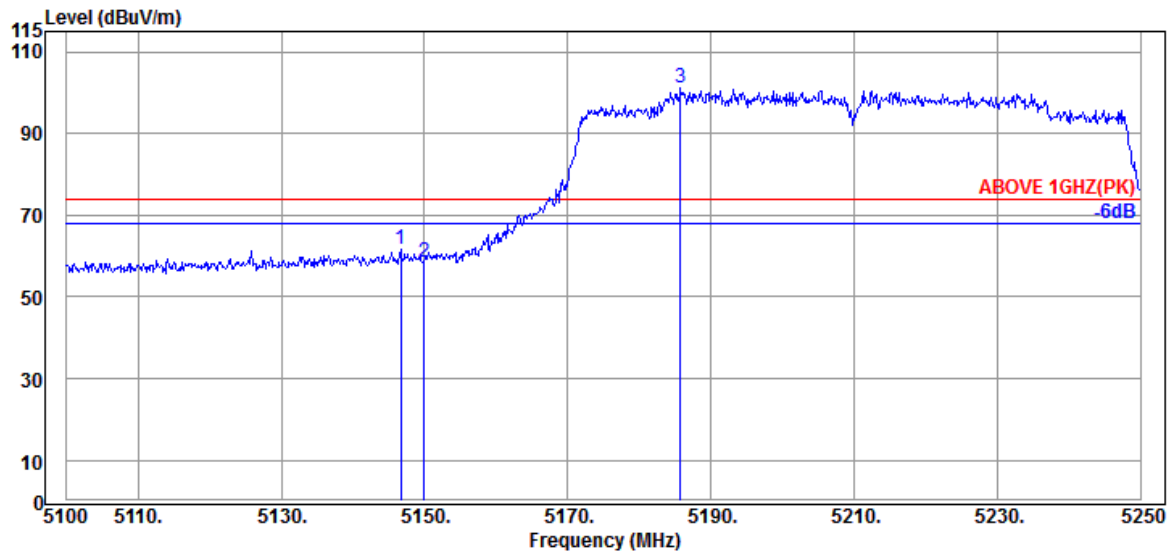

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.650	34.20	10.70	34.35	51.02	61.57	74.00	12.43	Peak
5149.950	34.20	10.70	34.35	48.06	58.61	74.00	15.39	Peak
@ 5185.800	34.20	10.72	34.34	90.44	101.02	---	---	Peak

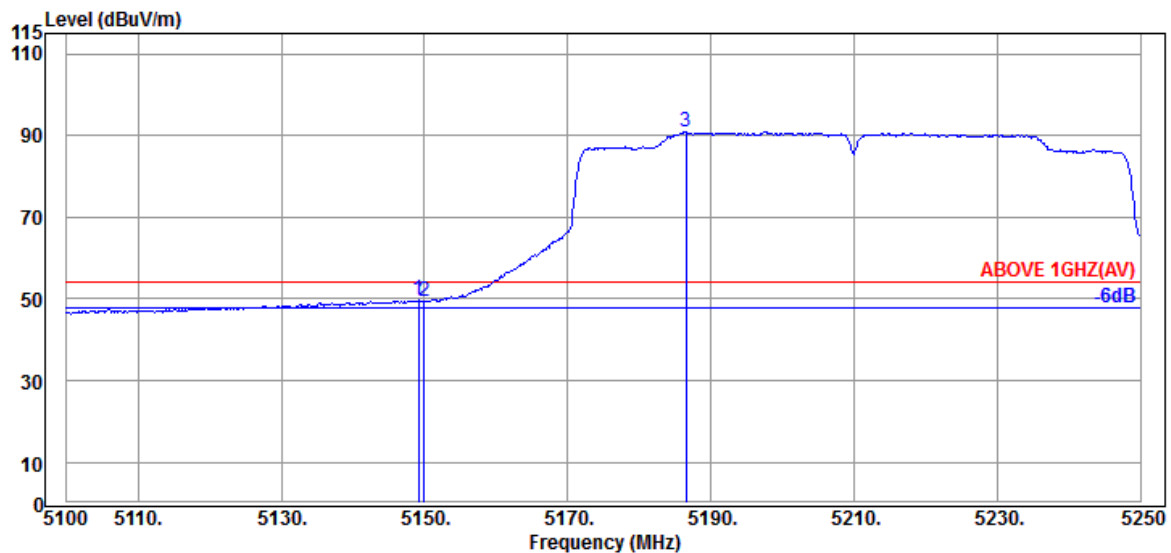

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	34.20	10.70	34.35	39.06	49.61	54.00	4.39	Average
5149.950	34.20	10.70	34.35	38.95	49.50	54.00	4.50	Average
@ 5186.550	34.20	10.72	34.34	80.36	90.94	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

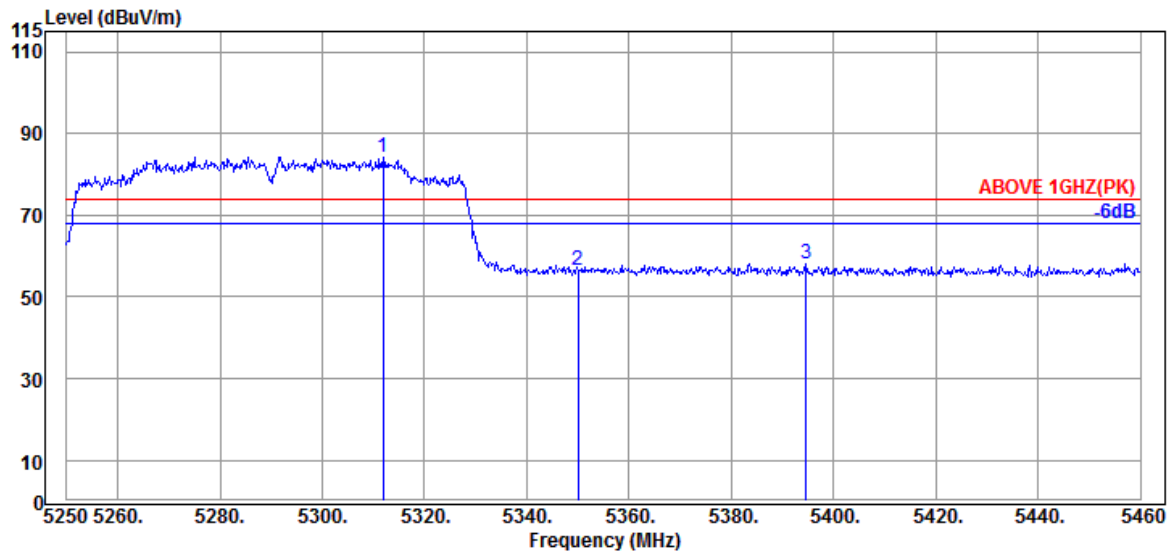

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5311.950	34.53	10.81	34.29	73.24	84.29	---	---	Peak
5349.960	34.60	10.83	34.27	45.47	56.63	74.00	17.37	Peak
5394.690	34.70	10.87	34.27	46.78	58.08	74.00	15.92	Peak

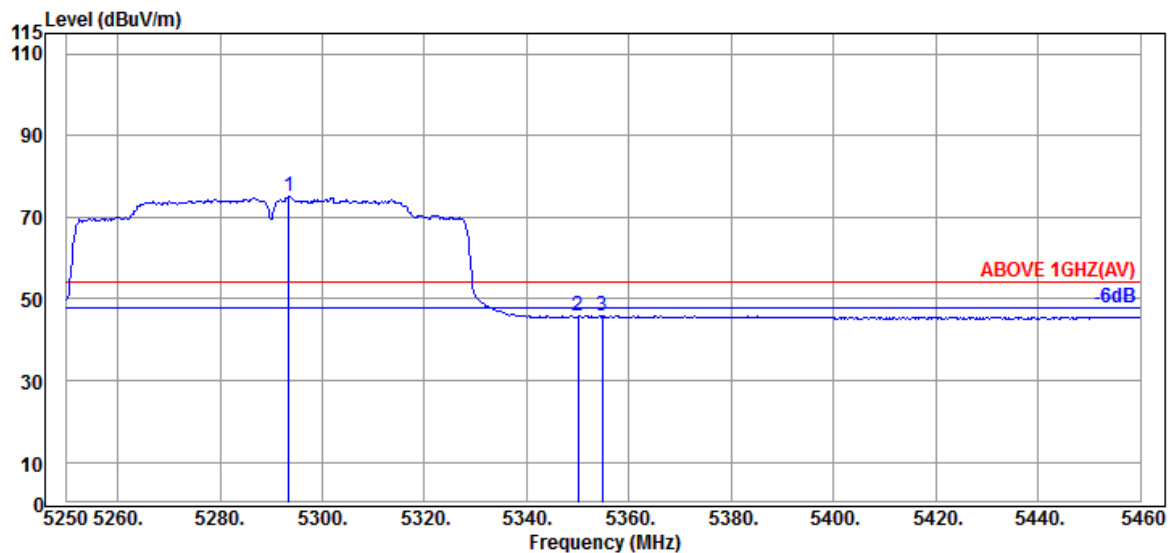

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5293.470	34.50	10.81	34.30	64.23	75.24	---	---	Average
5349.960	34.60	10.83	34.27	34.55	45.71	54.00	8.29	Average
5354.790	34.63	10.83	34.27	34.65	45.84	54.00	8.16	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

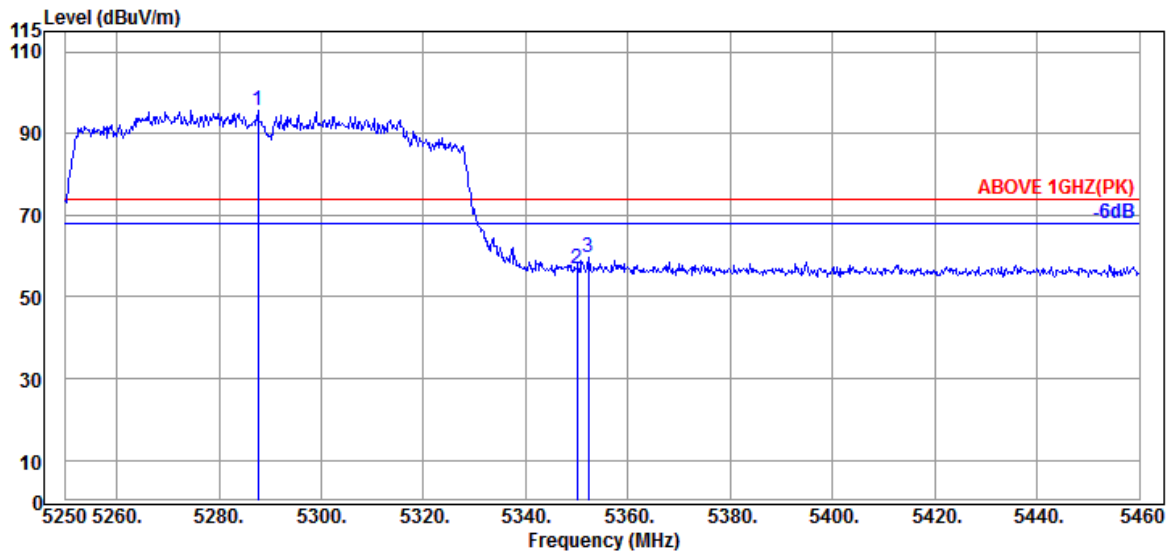

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5287.590	34.47	10.81	34.30	84.71	95.69	---	---	Peak
5349.960	34.60	10.83	34.27	45.84	57.00	74.00	17.00	Peak
5352.270	34.60	10.83	34.27	48.32	59.48	74.00	14.52	Peak

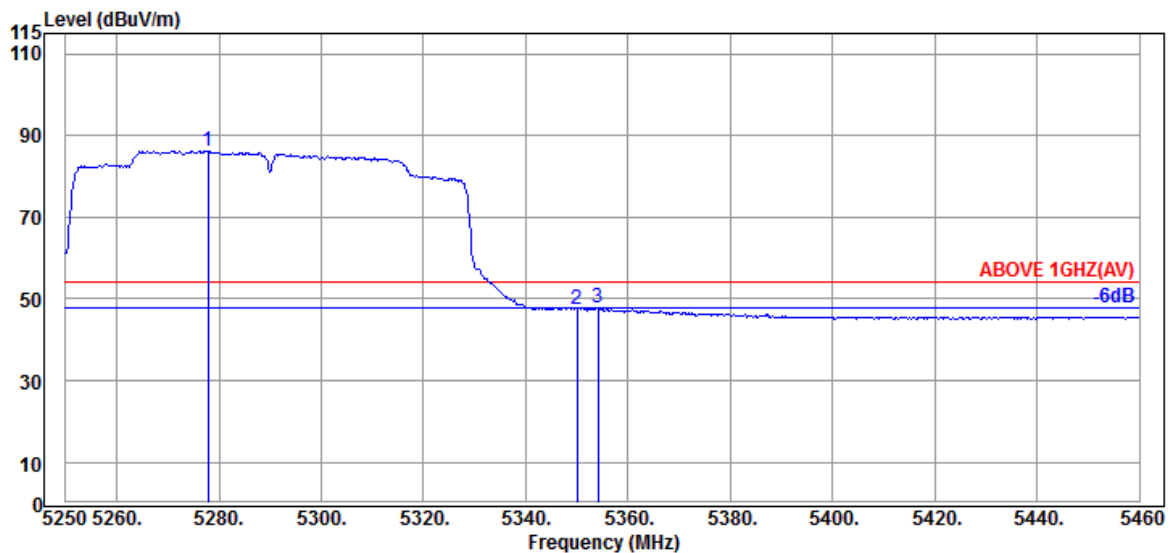

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5277.930	34.47	10.79	34.30	75.36	86.32	---	---	Average
5349.960	34.60	10.83	34.27	36.39	47.55	54.00	6.45	Average
5354.160	34.63	10.83	34.27	36.53	47.72	54.00	6.28	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

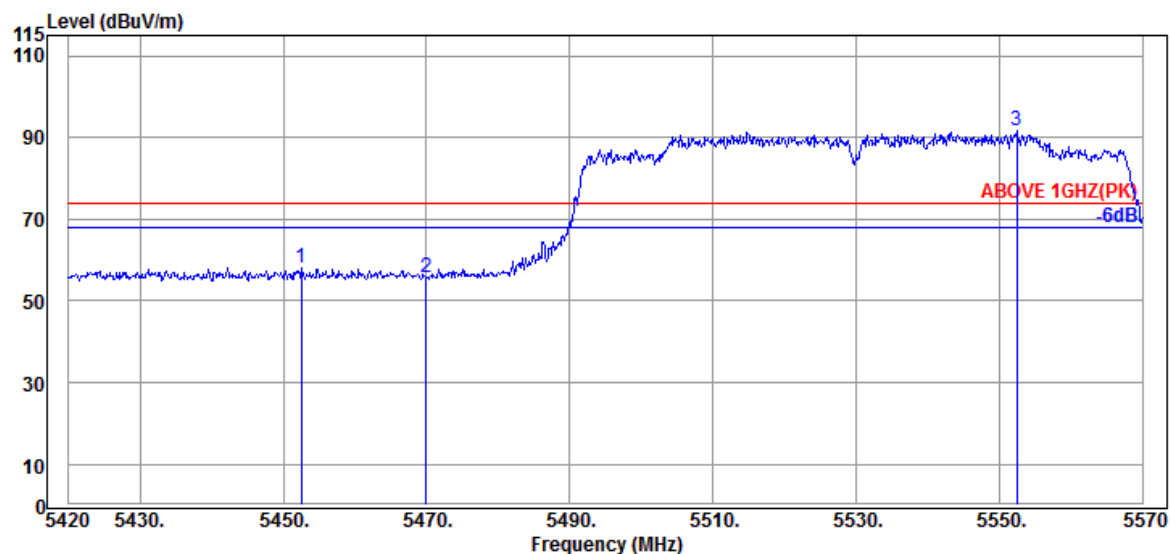

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.550	34.50	10.89	34.24	46.85	58.00	74.00	16.00	Peak
5469.950	34.47	10.91	34.24	44.39	55.53	74.00	18.47	Peak
@ 5552.450	34.30	10.95	34.26	80.75	91.74	---	---	Peak

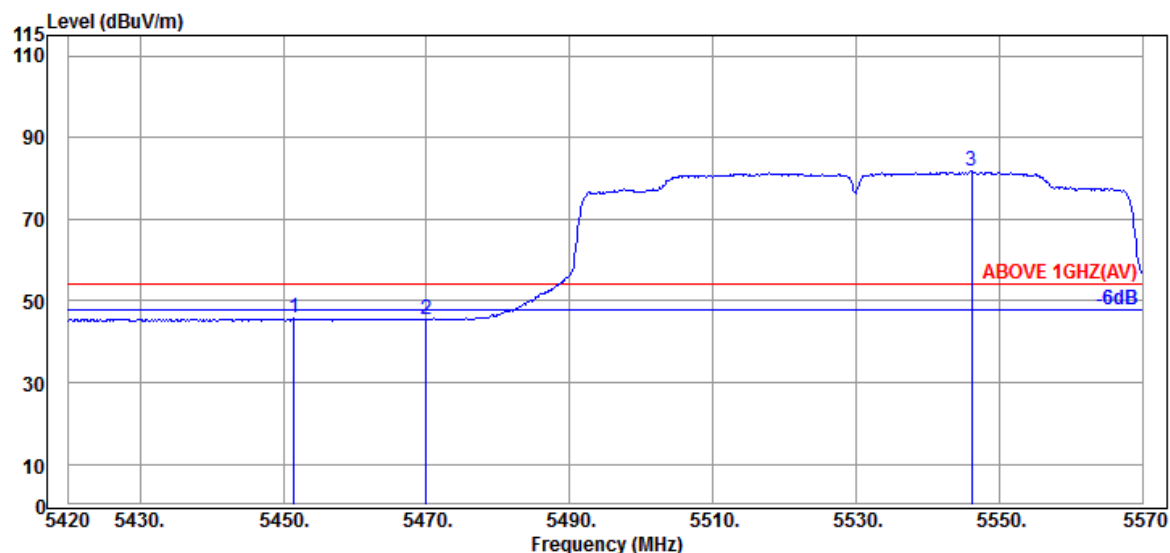

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.500	34.50	10.89	34.24	34.52	45.67	54.00	8.33	Average
5469.950	34.47	10.91	34.24	34.29	45.43	54.00	8.57	Average
@ 5546.150	34.30	10.95	34.25	70.66	81.66	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

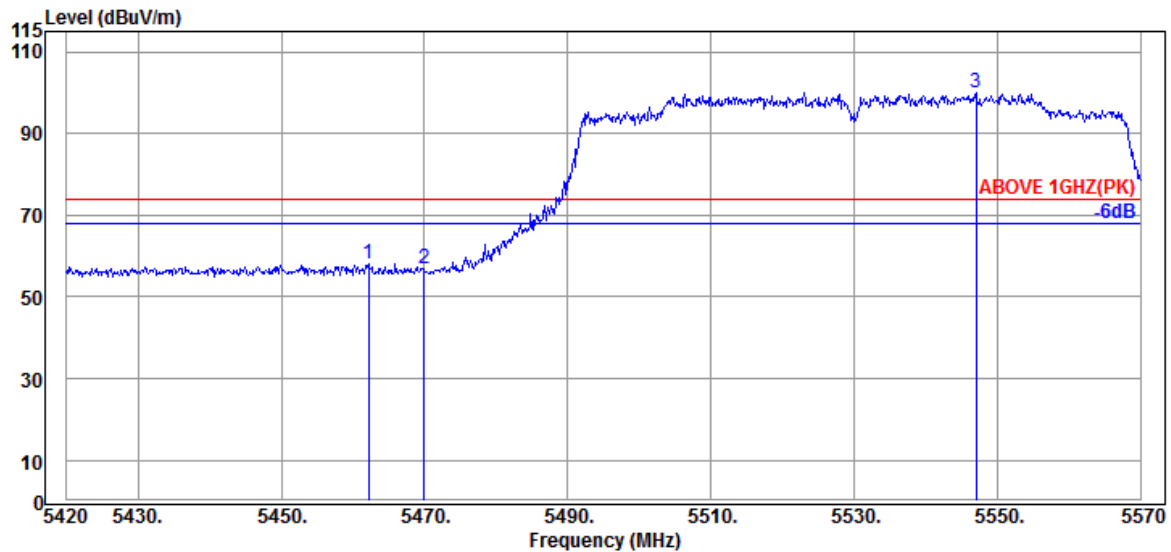

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.150	34.50	10.91	34.24	47.03	58.20	74.00	15.80	Peak
5469.950	34.47	10.91	34.24	45.77	56.91	74.00	17.09	Peak
@ 5547.050	34.30	10.95	34.25	88.99	99.99	---	---	Peak

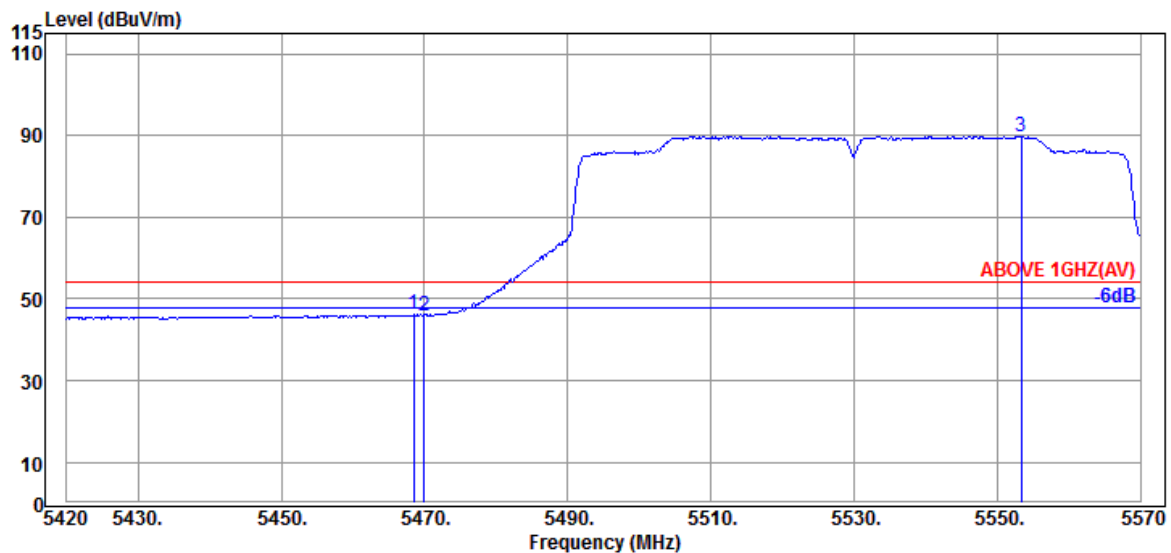

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.450	34.47	10.91	34.24	34.91	46.05	54.00	7.95	Average
5469.950	34.47	10.91	34.24	34.73	45.87	54.00	8.13	Average
@ 5553.350	34.30	10.95	34.26	78.91	89.90	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5610MHz

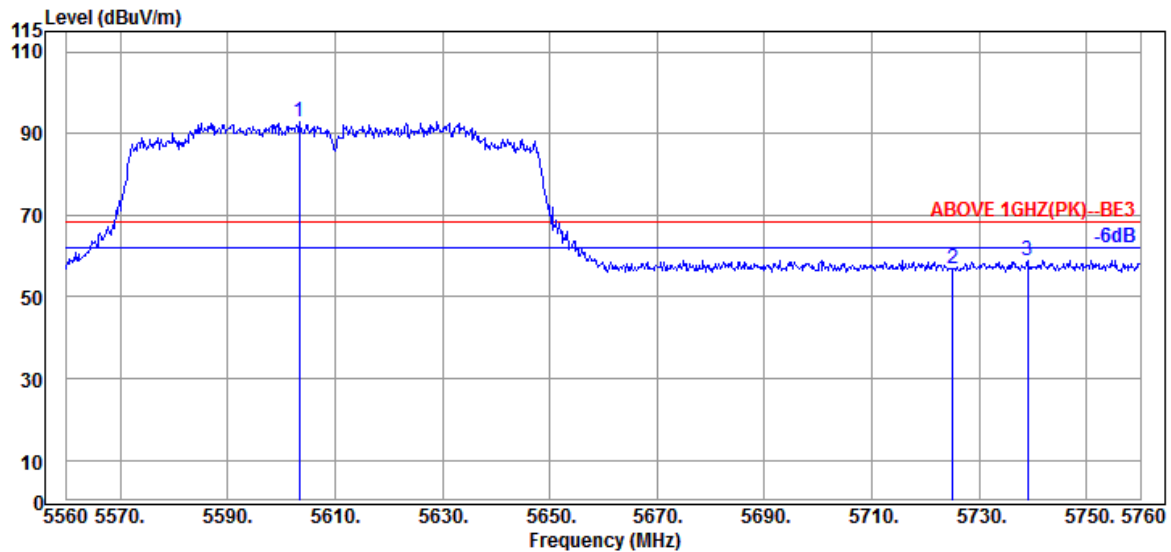

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5603.400	34.40	10.99	34.28	81.88	92.99	---	---	Peak
	5725.000	34.67	11.05	34.32	45.53	56.93	68.20	11.27	Peak
	5739.000	34.80	11.05	34.33	47.49	59.01	68.20	9.19	Peak

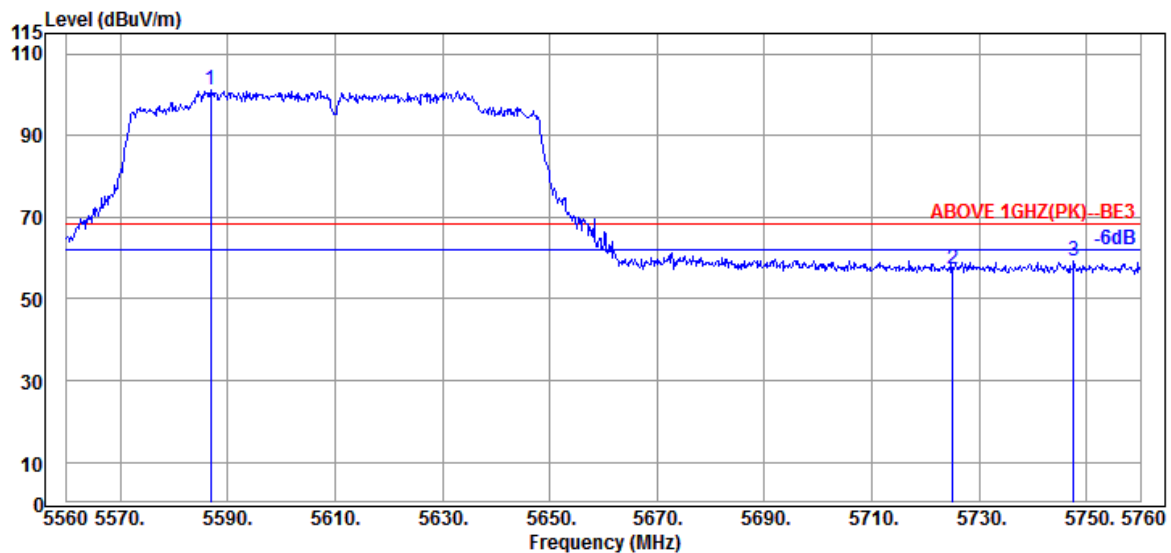

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5586.800	34.37	10.97	34.27	90.07	101.14	---	---	Peak
	5725.000	34.67	11.05	34.32	46.06	57.46	68.20	10.74	Peak
	5747.600	34.80	11.06	34.33	47.60	59.13	68.20	9.07	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

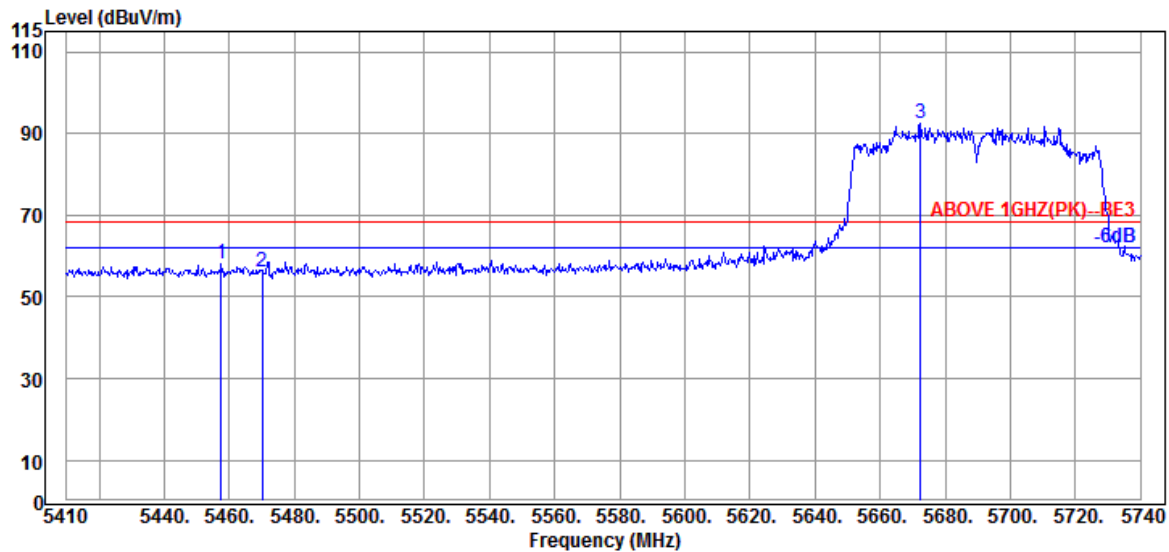

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5457.520	34.50	10.89	34.24	46.98	58.13	68.20	10.07	Peak
5470.060	34.47	10.91	34.24	44.99	56.13	68.20	12.07	Peak
@ 5672.350	34.40	11.01	34.30	81.27	92.38	---	---	Peak

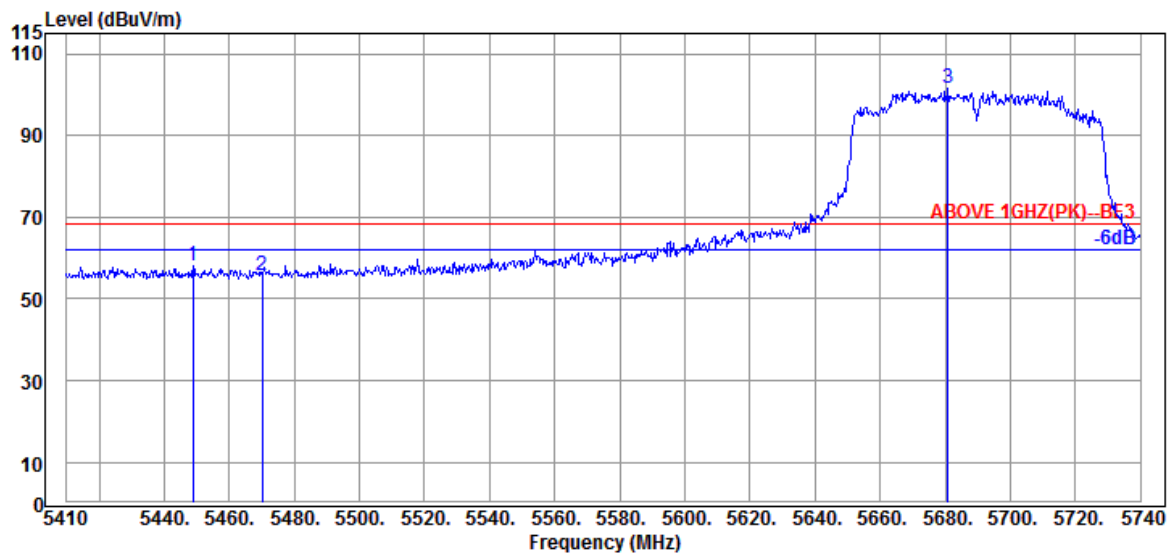

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5448.940	34.50	10.89	34.25	46.88	58.02	68.20	10.18	Peak
5470.060	34.47	10.91	34.24	44.46	55.60	68.20	12.60	Peak
@ 5680.930	34.40	11.03	34.31	90.29	101.41	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

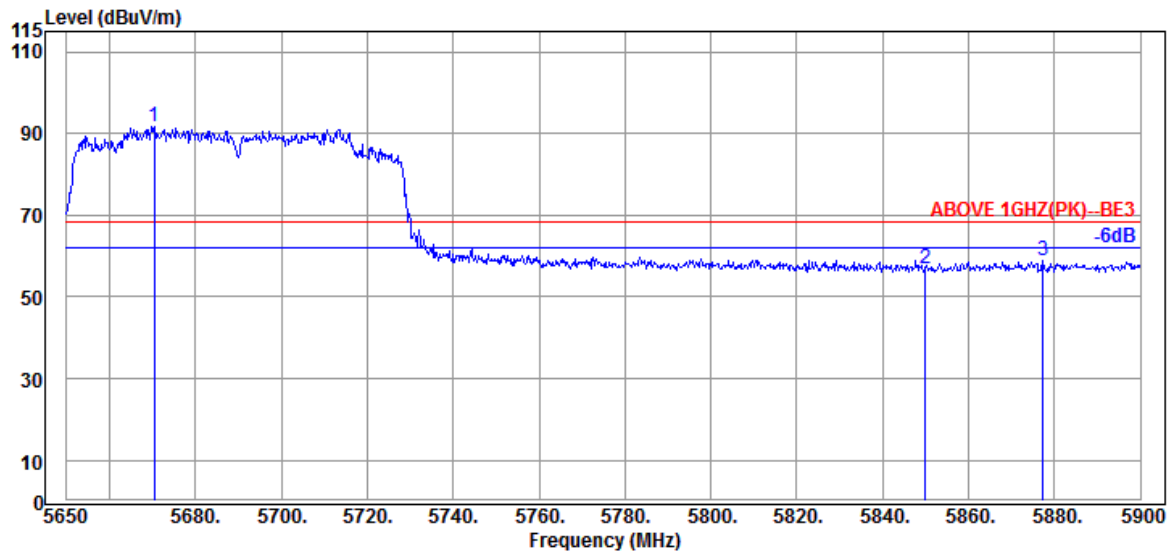

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5670.500	34.40	11.01	34.30	80.46	91.57	---	---	Peak
	5850.000	35.10	11.10	34.38	45.07	56.89	68.20	11.31	Peak
	5877.250	35.30	11.12	34.39	46.98	59.01	68.20	9.19	Peak

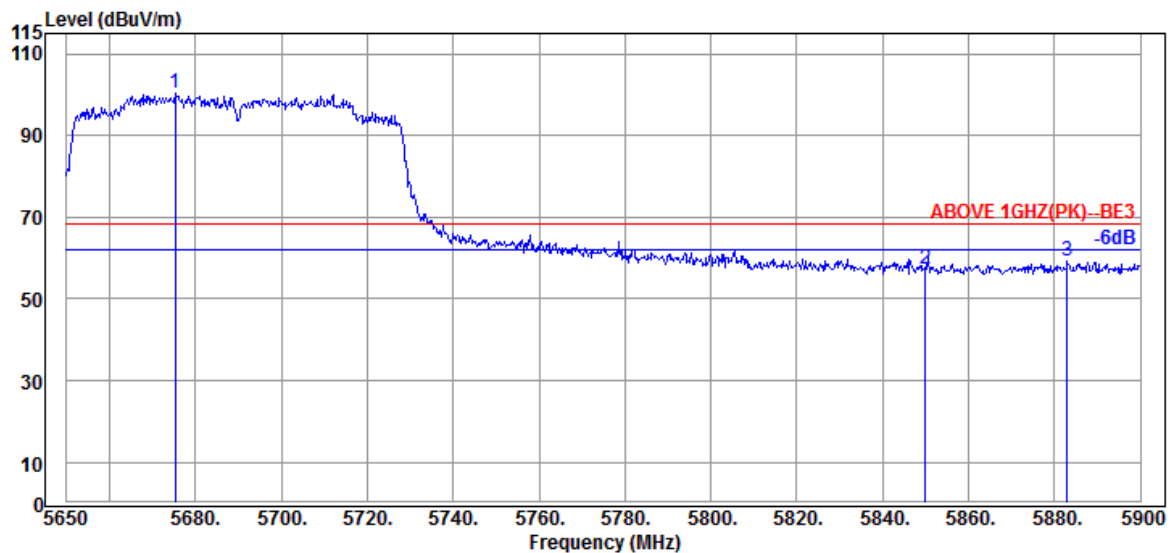

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5675.250	34.40	11.03	34.30	89.24	100.37	---	---	Peak
	5850.000	35.10	11.10	34.38	45.50	57.32	68.20	10.88	Peak
	5883.000	35.30	11.12	34.39	47.38	59.41	68.20	8.79	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	III
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

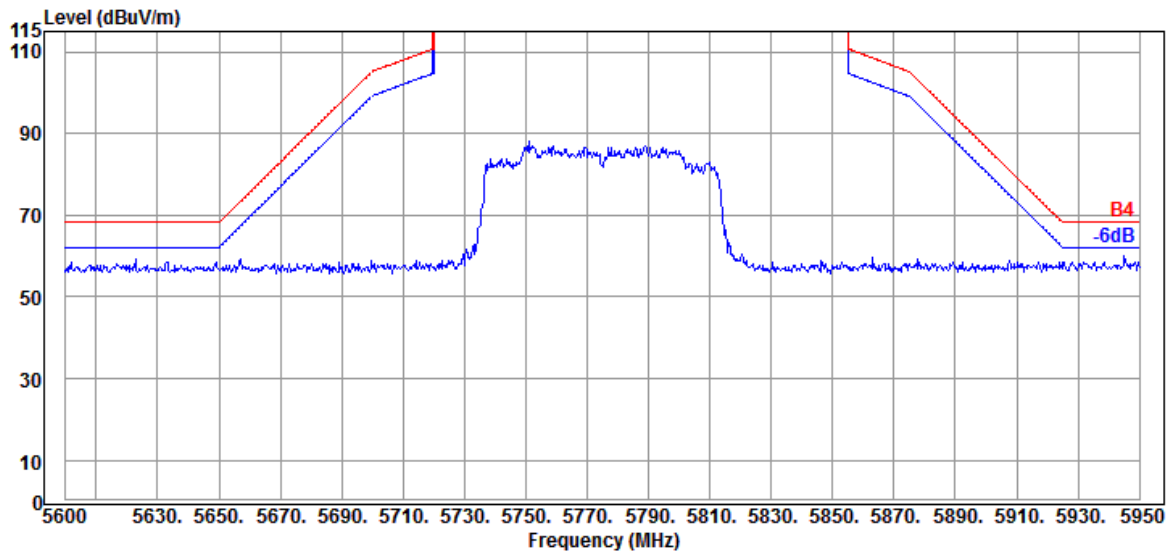

Antenna at Vertical Polarization

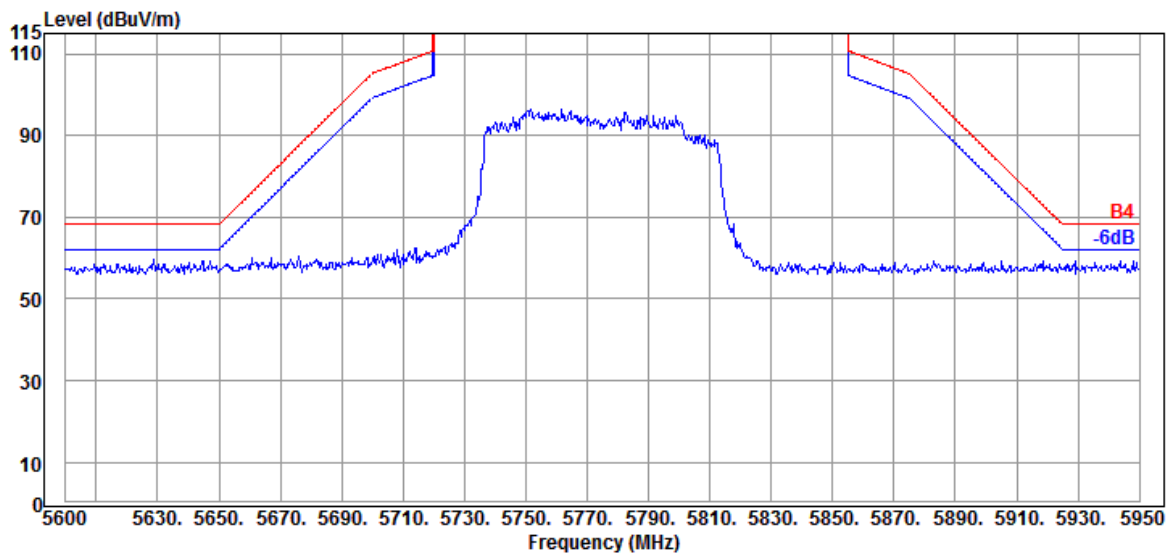

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VH160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

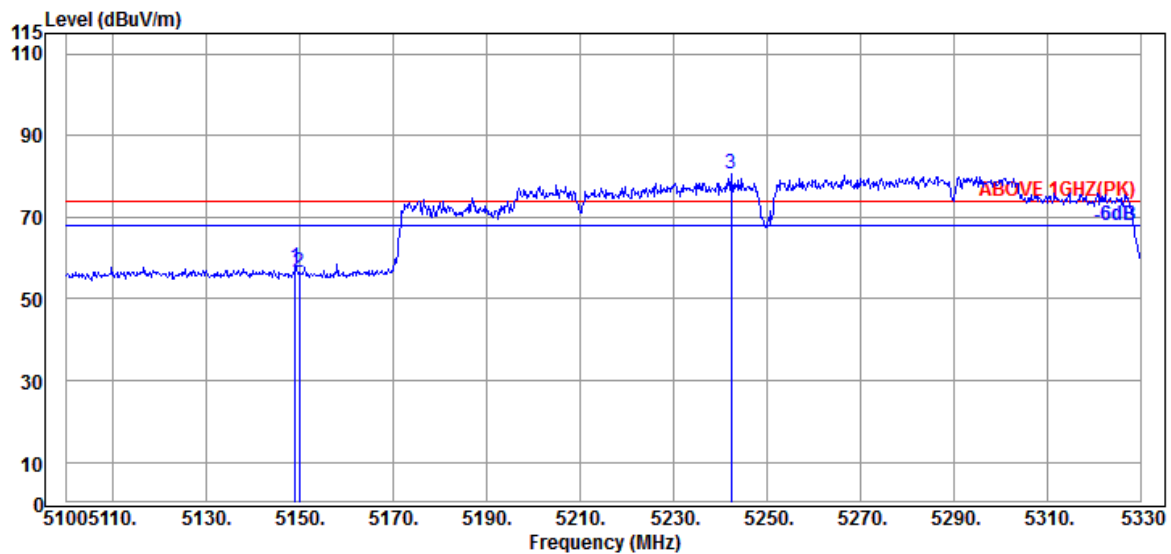

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.990	34.20	10.70	34.35	47.27	57.82	74.00	16.18	Peak
5149.910	34.20	10.70	34.35	46.07	56.62	74.00	17.38	Peak
@ 5242.370	34.35	10.76	34.32	69.69	80.48	---	---	Peak

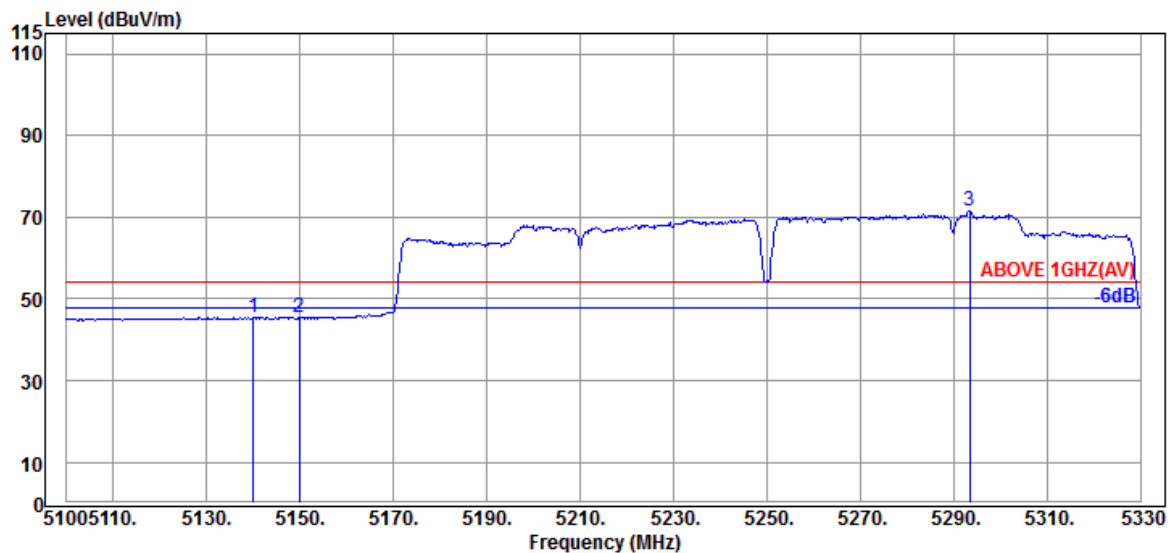

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5140.020	34.17	10.70	34.36	35.02	45.53	54.00	8.47	Average
5149.910	34.20	10.70	34.35	34.77	45.32	54.00	8.68	Average
@ 5293.430	34.50	10.81	34.30	60.37	71.38	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ac-VH160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

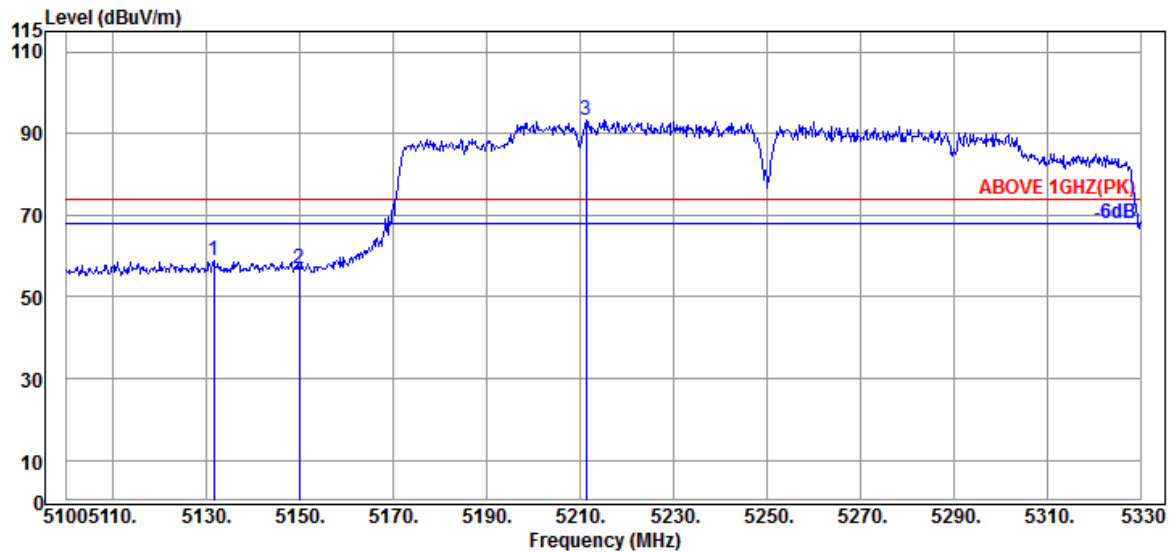

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5131.510	34.17	10.70	34.36	48.29	58.80	74.00	15.20	Peak
5149.910	34.20	10.70	34.35	46.44	56.99	74.00	17.01	Peak
@ 5211.320	34.25	10.74	34.33	82.51	93.17	---	---	Peak

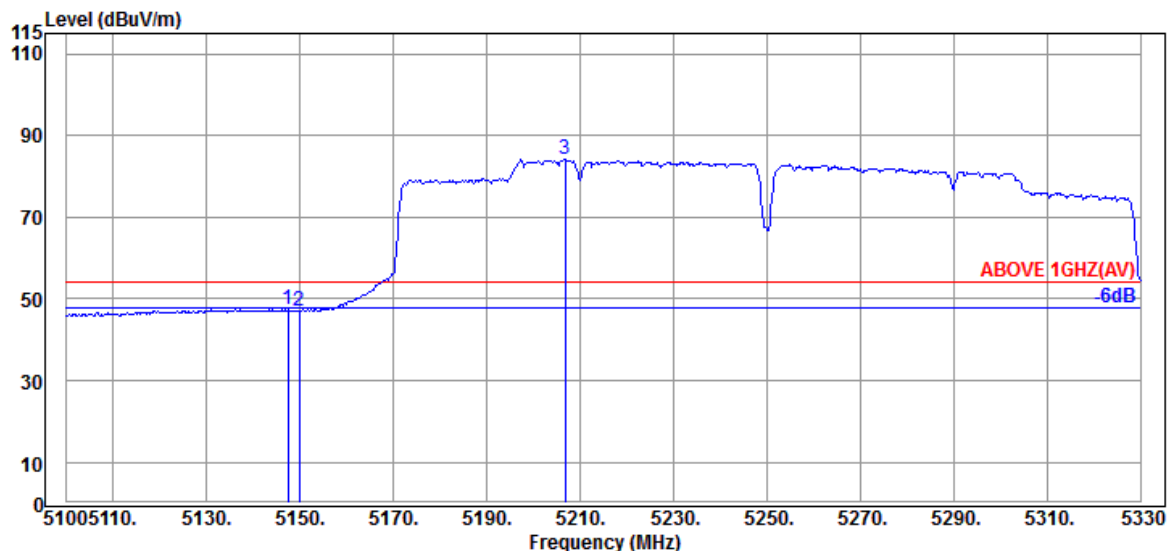

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.380	34.20	10.70	34.35	36.84	47.39	54.00	6.61	Average
5149.910	34.20	10.70	34.35	36.58	47.13	54.00	6.87	Average
@ 5206.720	34.25	10.74	34.33	73.46	84.12	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VH160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

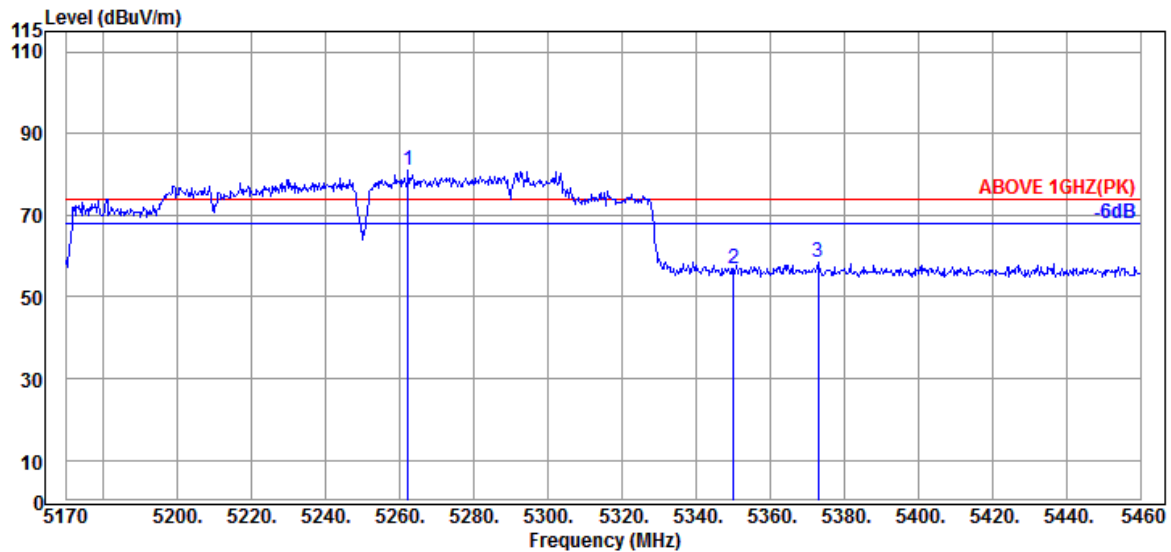

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5262.220	34.43	10.79	34.31	69.97	80.88	---	---	Peak
	5350.090	34.60	10.83	34.27	45.71	56.87	74.00	17.13	Peak
	5373.000	34.67	10.85	34.27	47.20	58.45	74.00	15.55	Peak

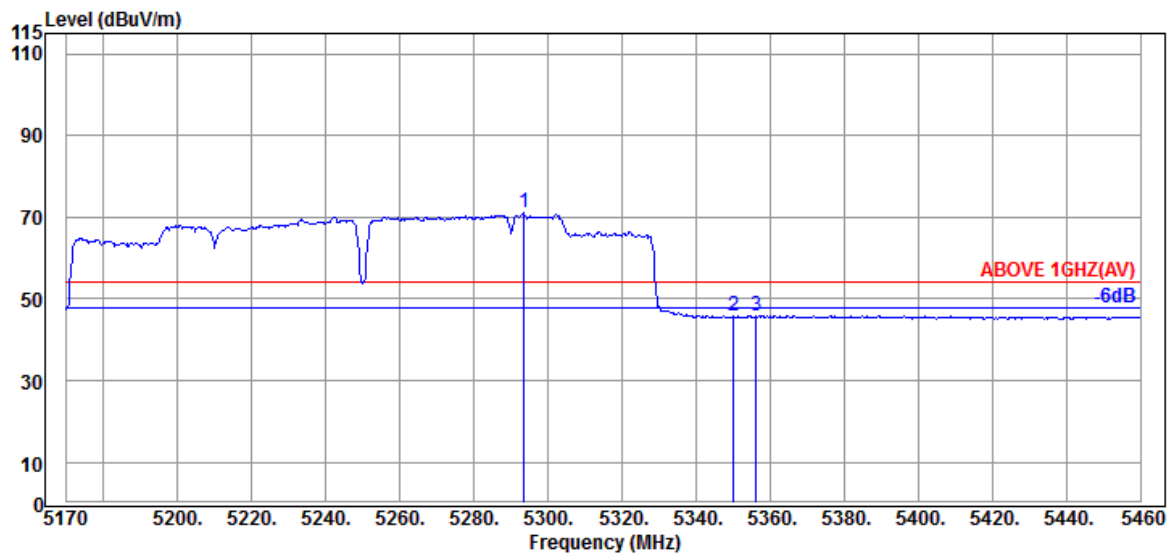

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5293.540	34.50	10.81	34.30	60.30	71.31	---	---	Average
	5350.090	34.60	10.83	34.27	34.53	45.69	54.00	8.31	Average
	5356.180	34.63	10.85	34.27	34.68	45.89	54.00	8.11	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VH160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

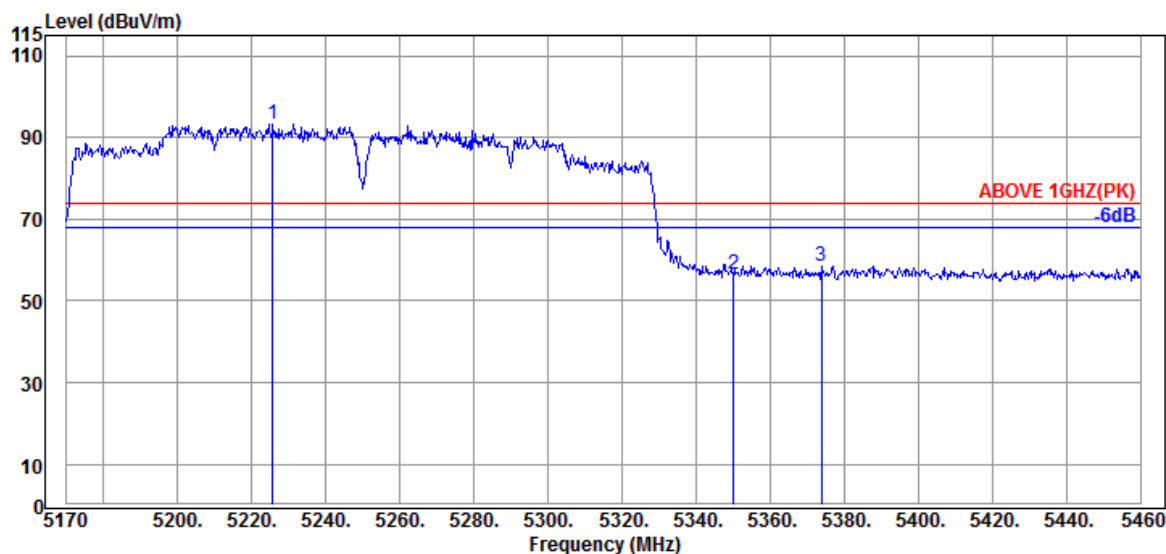

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5225.680	34.30	10.76	34.32	82.71	93.45	---	---	Peak
5350.090	34.60	10.83	34.27	45.46	56.62	74.00	17.38	Peak
5373.870	34.67	10.85	34.27	47.37	58.62	74.00	15.38	Peak

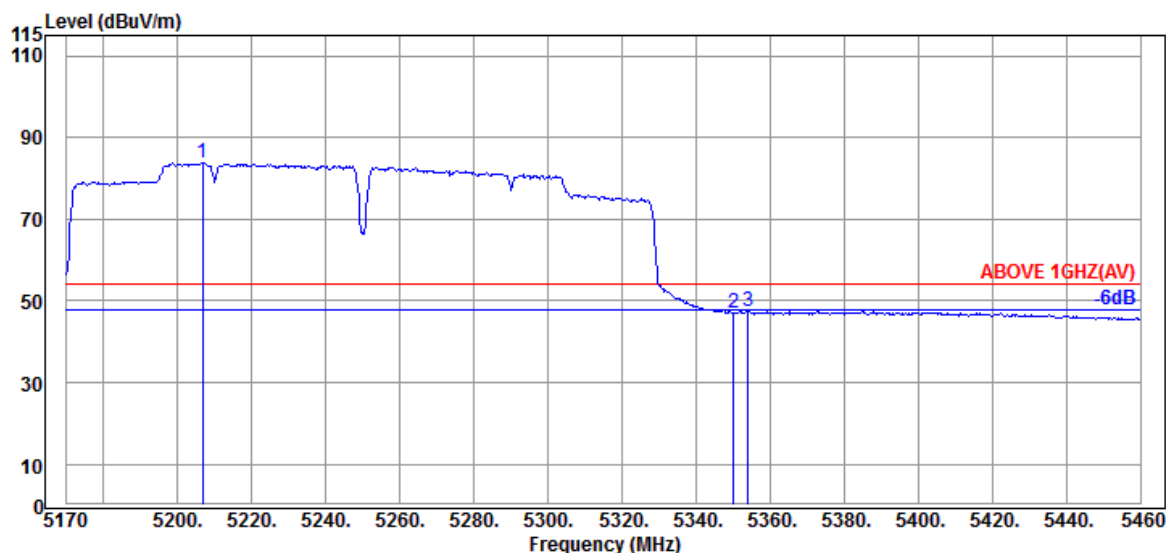

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5206.830	34.25	10.74	34.33	73.21	83.87	---	---	Average
5350.090	34.60	10.83	34.27	36.04	47.20	54.00	6.80	Average
5354.150	34.63	10.83	34.27	36.24	47.43	54.00	6.57	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

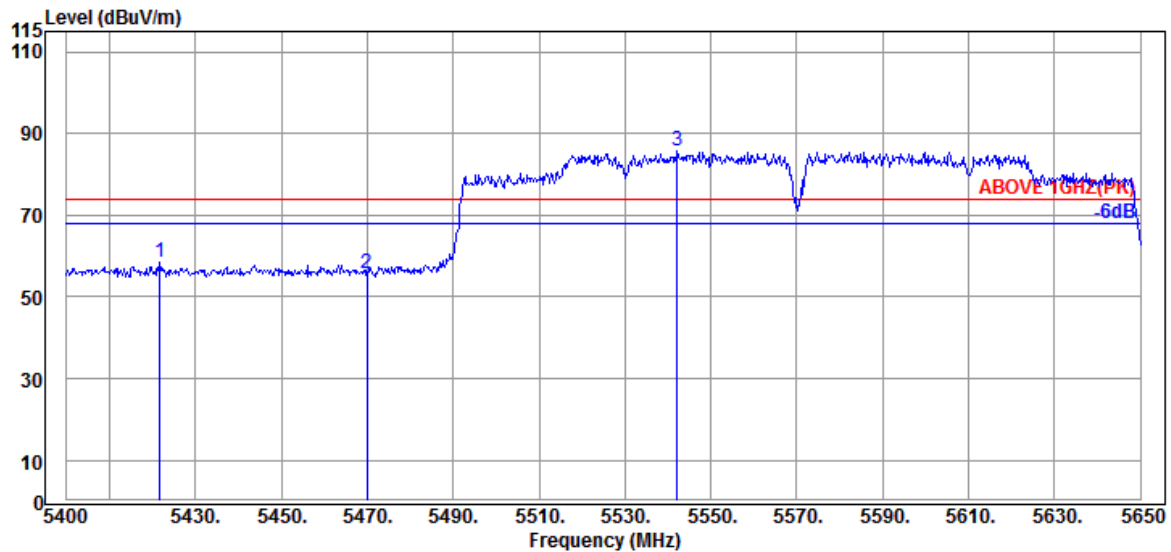

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5421.750	34.60	10.87	34.26	47.11	58.32	74.00	15.68	Peak
5470.000	34.47	10.91	34.24	44.63	55.77	74.00	18.23	Peak
@ 5542.250	34.33	10.95	34.25	74.70	85.73	---	---	Peak

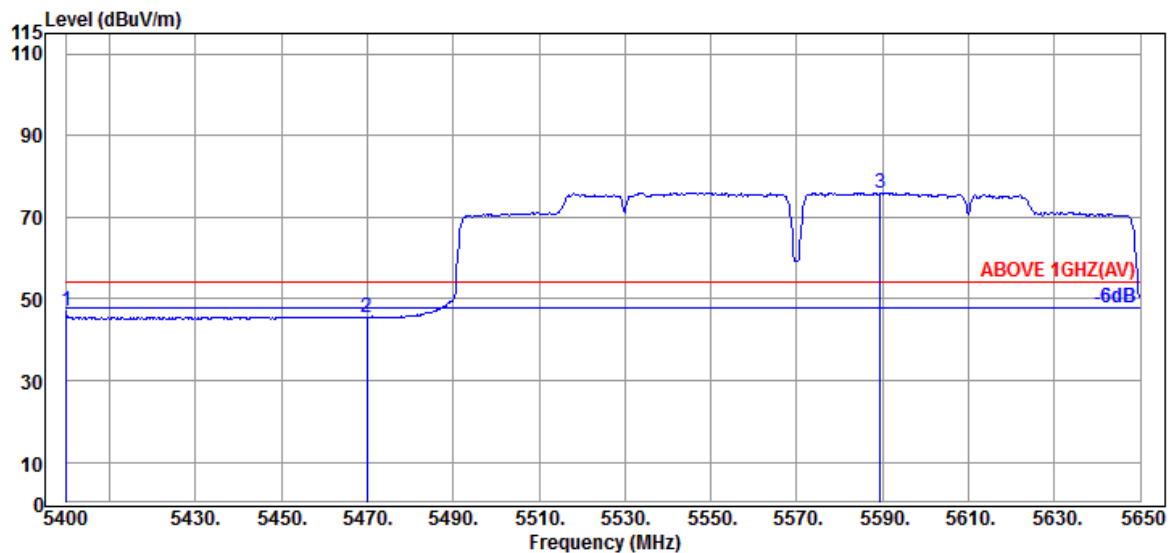

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5400.000	34.70	10.87	34.26	35.89	47.20	54.00	6.80	Average
5470.000	34.47	10.91	34.24	34.26	45.40	54.00	8.60	Average
@ 5589.500	34.37	10.97	34.27	64.98	76.05	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

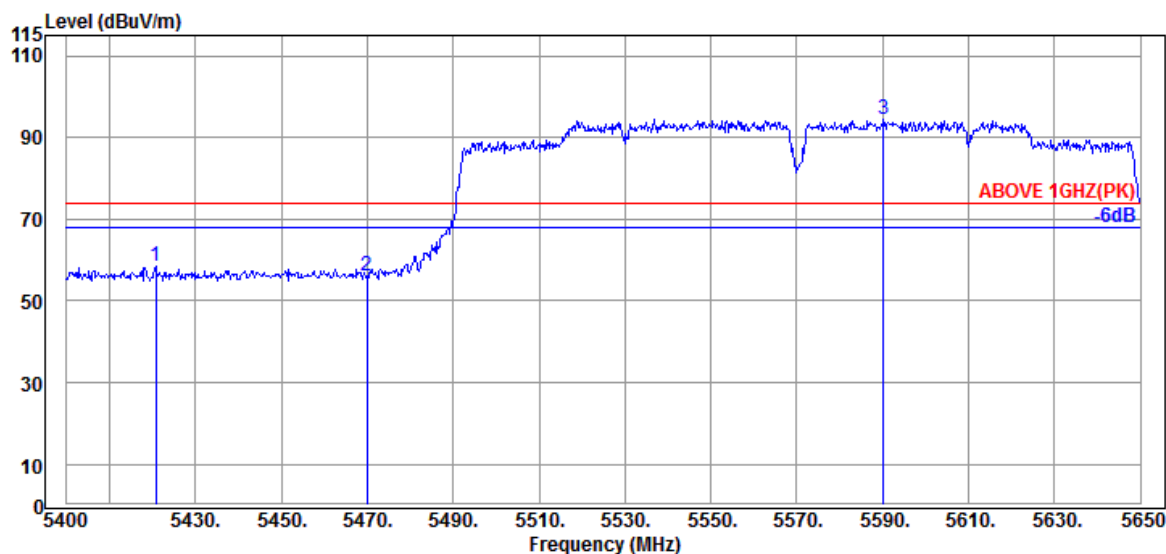

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5420.750	34.60	10.87	34.26	47.36	58.57	74.00	15.43	Peak
5470.000	34.47	10.91	34.24	44.93	56.07	74.00	17.93	Peak
@ 5590.250	34.37	10.97	34.27	83.22	94.29	---	---	Peak

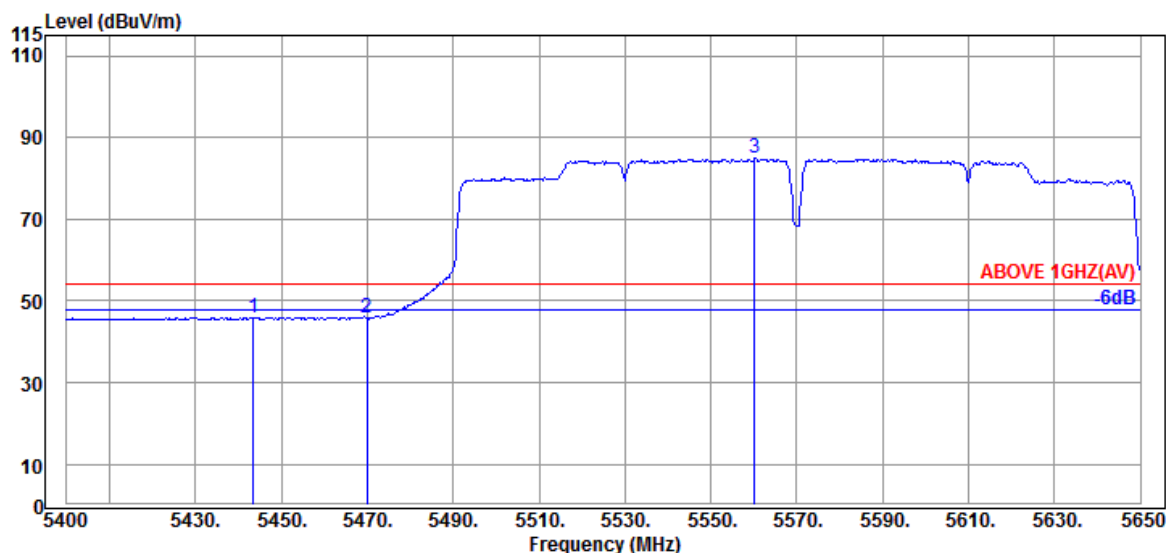

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5443.500	34.55	10.89	34.25	34.81	46.00	54.00	8.00	Average
5470.000	34.47	10.91	34.24	34.53	45.67	54.00	8.33	Average
@ 5560.250	34.33	10.95	34.26	73.82	84.84	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VH160	U-NII Band	2C
		Frequency	TX 5570MHz

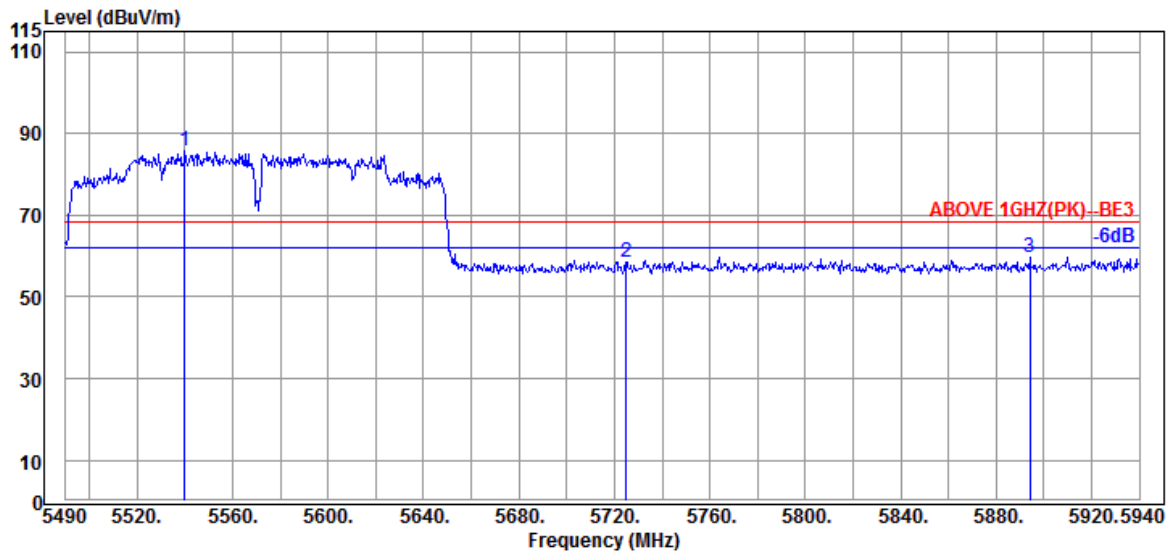

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5539.950	34.33	10.95	34.25	74.84	85.87	---	---	Peak
	5724.900	34.67	11.05	34.32	47.21	58.61	68.20	9.59	Peak
	5894.100	35.40	11.12	34.40	47.56	59.68	68.20	8.52	Peak

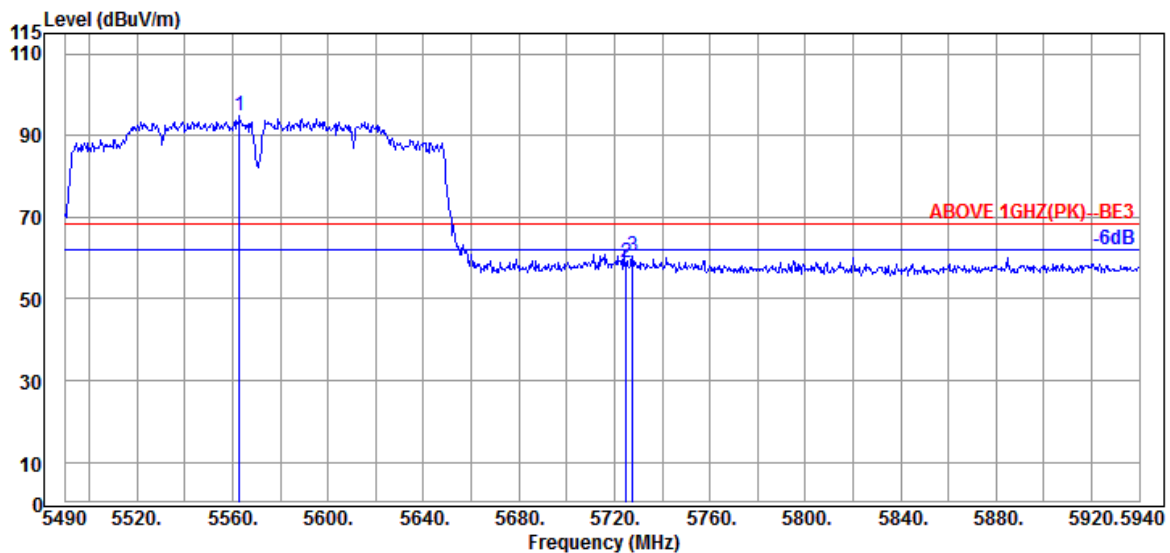

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5562.900	34.33	10.95	34.26	83.69	94.71	---	---	Peak
	5724.900	34.67	11.05	34.32	47.49	58.89	68.20	9.31	Peak
	5727.600	34.67	11.05	34.32	49.26	60.66	68.20	7.54	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	I
		Frequency	TX 5180MHz

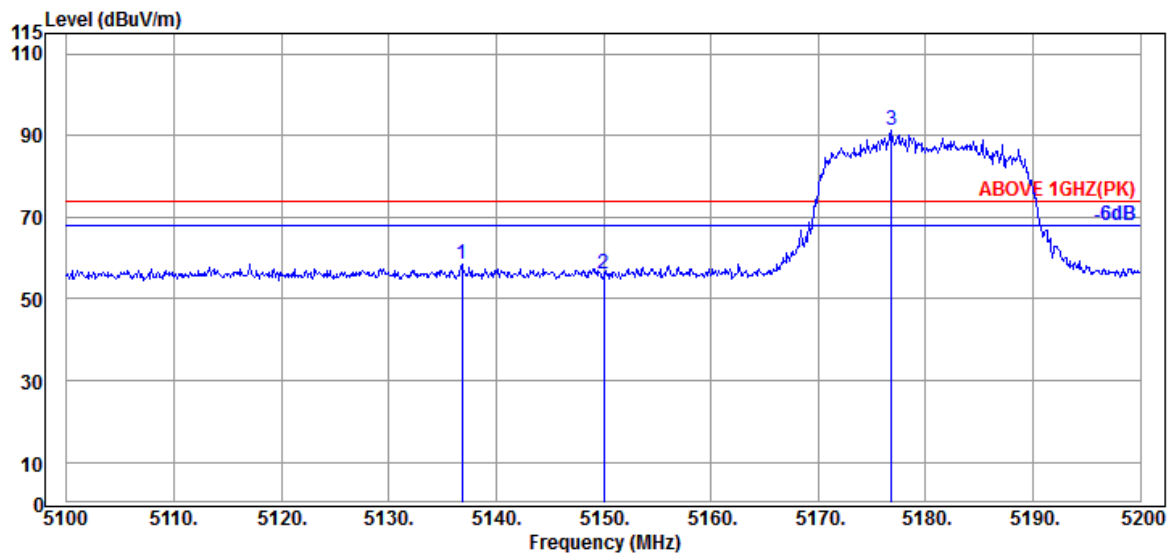

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5136.800	34.17	10.70	34.36	47.93	58.44	74.00	15.56	Peak
5150.000	34.20	10.70	34.35	45.62	56.17	74.00	17.83	Peak
@ 5176.800	34.20	10.72	34.34	80.52	91.10	---	---	Peak

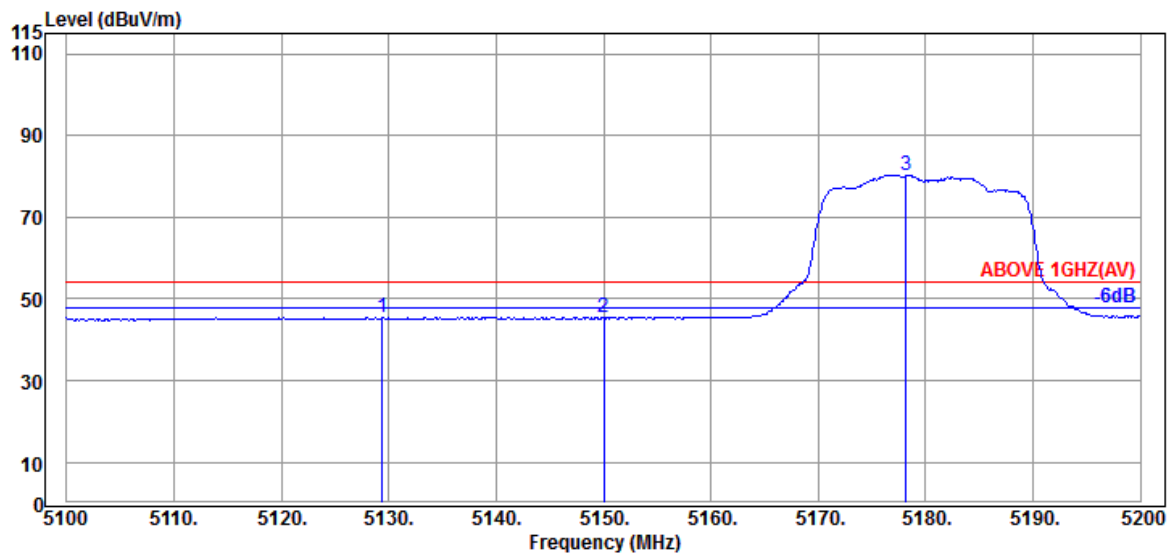

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5129.400	34.17	10.70	34.36	35.01	45.52	54.00	8.48	Average
5150.000	34.20	10.70	34.35	34.85	45.40	54.00	8.60	Average
@ 5178.200	34.20	10.72	34.34	69.78	80.36	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ax-HE20	U-NII Band	I
		Frequency	TX 5180MHz

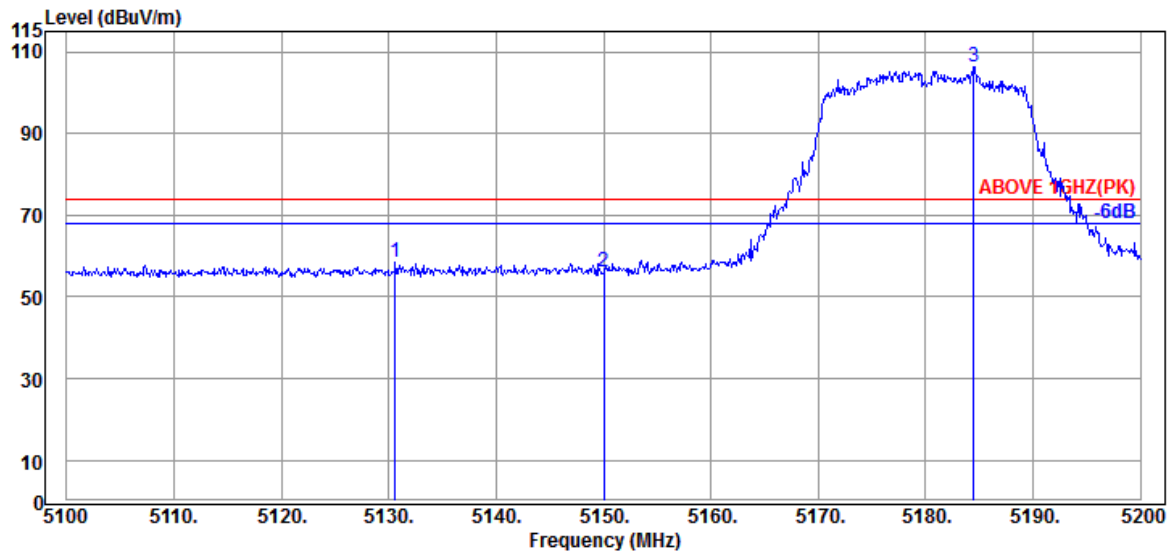

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5130.600	34.17	10.70	34.36	48.10	58.61	74.00	15.39	Peak
5150.000	34.20	10.70	34.35	45.66	56.21	74.00	17.79	Peak
@ 5184.500	34.20	10.72	34.34	95.88	106.46	---	---	Peak

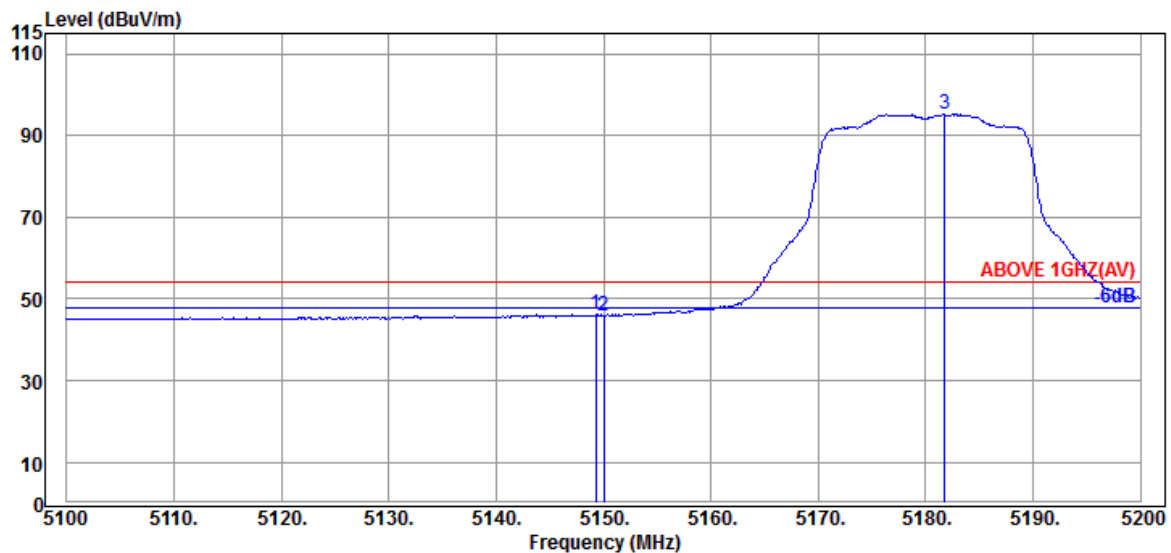

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5149.300	34.20	10.70	34.35	35.65	46.20	54.00	7.80	Average
5150.000	34.20	10.70	34.35	35.36	45.91	54.00	8.09	Average
@ 5181.800	34.20	10.72	34.34	84.61	95.19	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

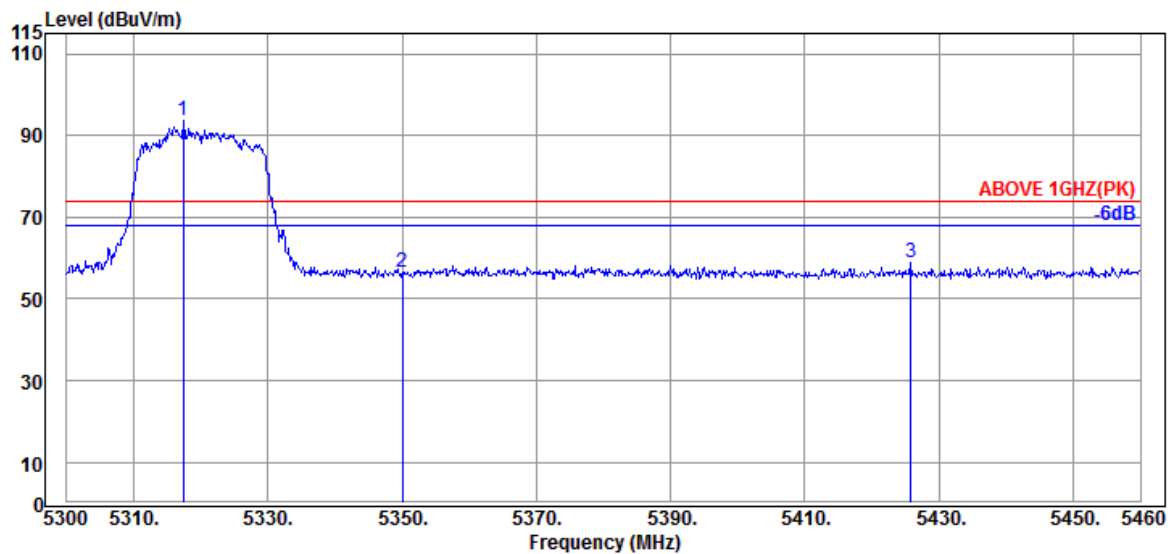

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.440	34.53	10.81	34.29	82.43	93.48	---	---	Peak
5350.080	34.60	10.83	34.27	45.26	56.42	74.00	17.58	Peak
5425.760	34.60	10.89	34.25	47.78	59.02	74.00	14.98	Peak

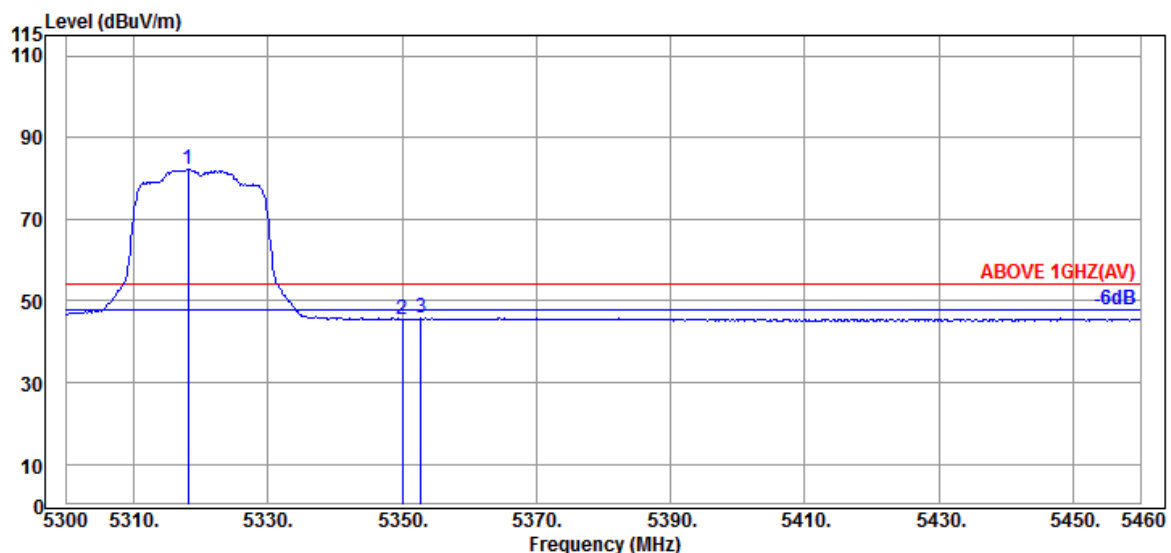

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.080	34.53	10.81	34.29	71.28	82.33	---	---	Average
5350.080	34.60	10.83	34.27	34.25	45.41	54.00	8.59	Average
5352.800	34.60	10.83	34.27	34.63	45.79	54.00	8.21	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

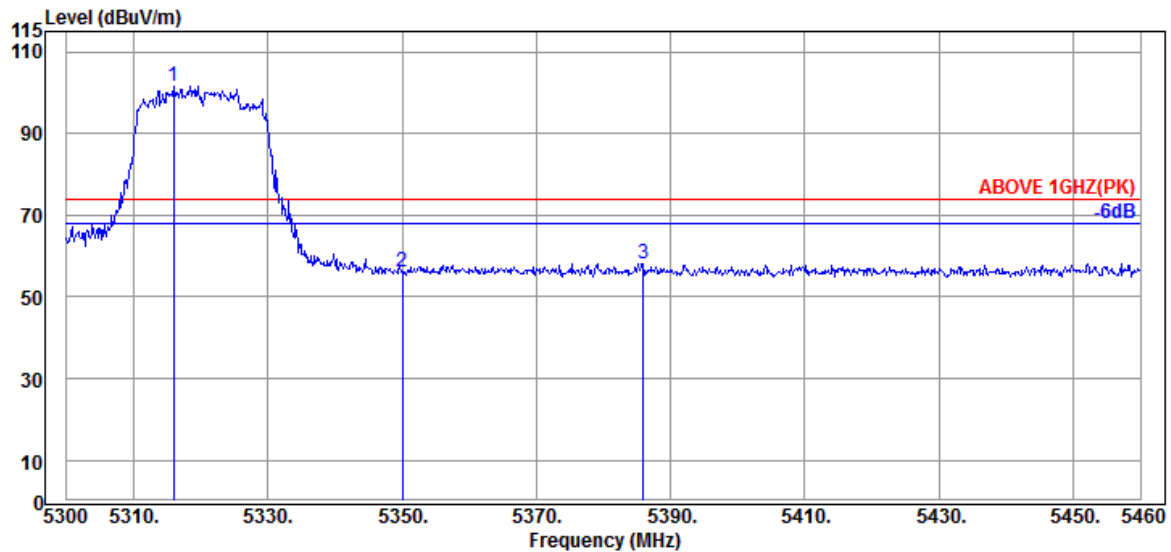

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.000	34.53	10.81	34.29	90.47	101.52	---	---	Peak
5350.080	34.60	10.83	34.27	44.81	55.97	74.00	18.03	Peak
5385.920	34.70	10.85	34.27	46.95	58.23	74.00	15.77	Peak

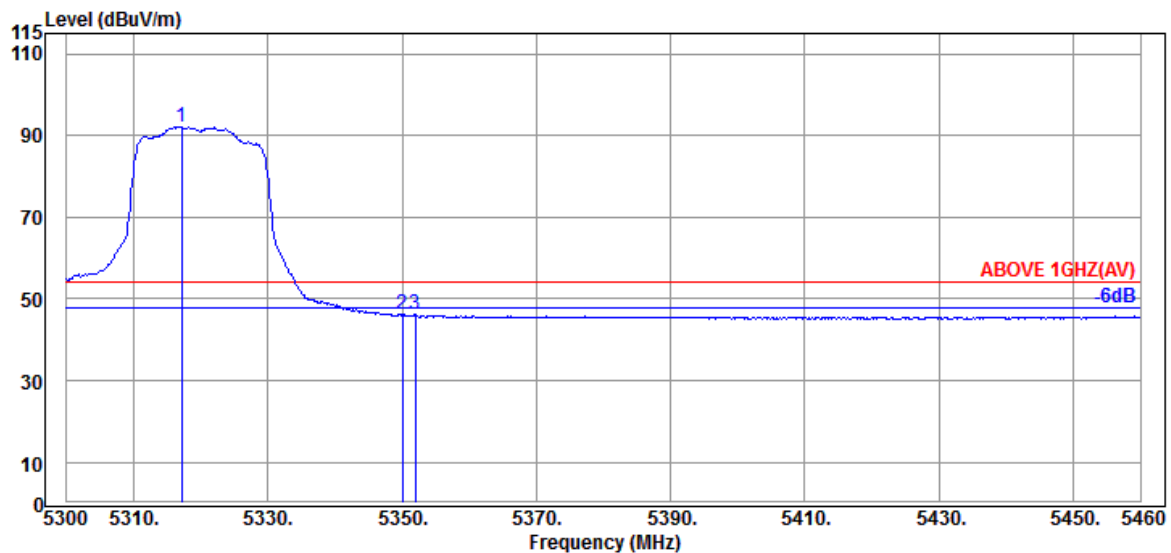

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.120	34.53	10.81	34.29	81.17	92.22	---	---	Average
5350.080	34.60	10.83	34.27	34.93	46.09	54.00	7.91	Average
5352.000	34.60	10.83	34.27	34.96	46.12	54.00	7.88	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

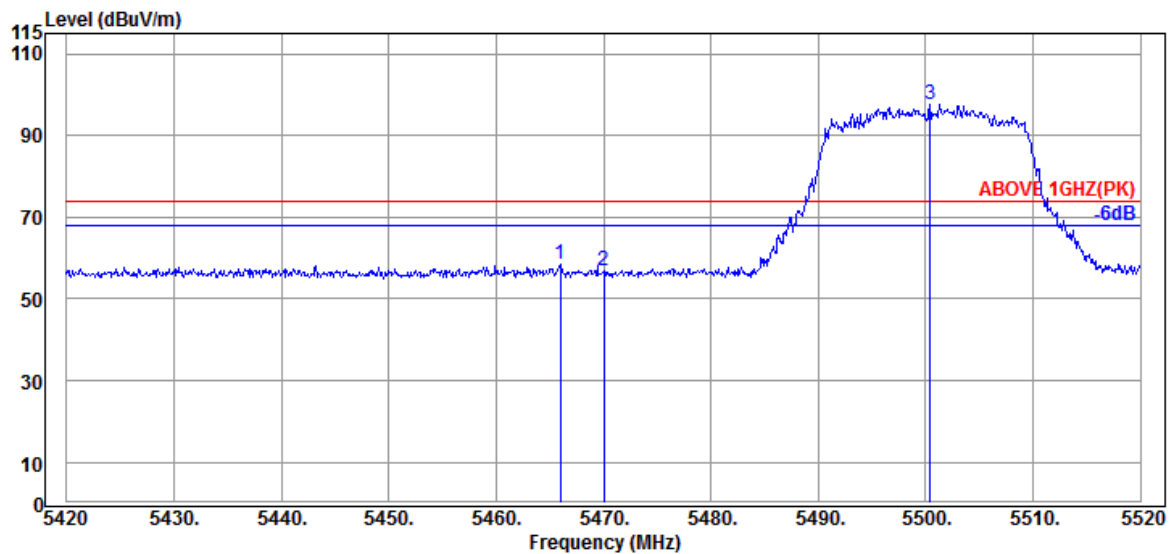

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5466.000	34.47	10.91	34.24	47.21	58.35	74.00	15.65	Peak
5470.000	34.47	10.91	34.24	45.66	56.80	74.00	17.20	Peak
@ 5500.400	34.40	10.93	34.23	86.36	97.46	---	---	Peak

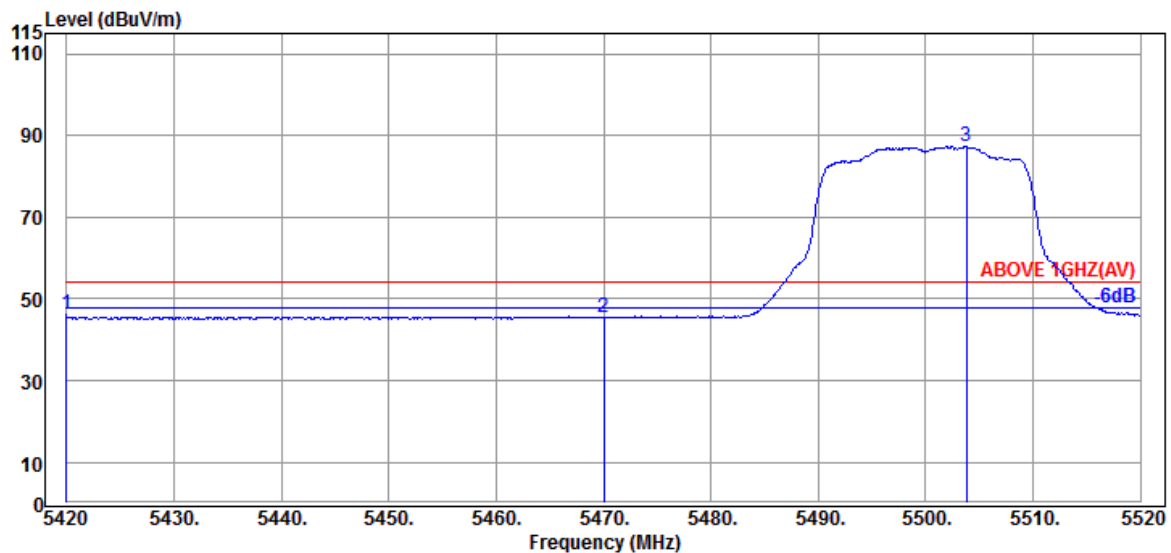

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5420.000	34.60	10.87	34.26	35.01	46.22	54.00	7.78	Average
5470.000	34.47	10.91	34.24	34.24	45.38	54.00	8.62	Average
@ 5503.800	34.40	10.93	34.24	76.42	87.51	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

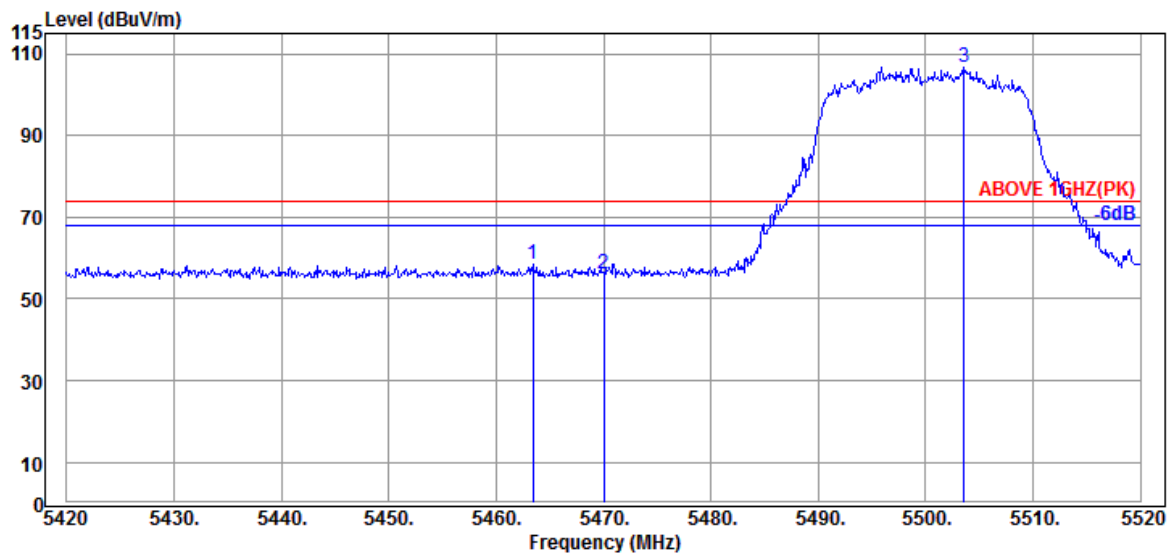

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.400	34.50	10.91	34.24	47.13	58.30	74.00	15.70	Peak
5470.000	34.47	10.91	34.24	45.15	56.29	74.00	17.71	Peak
@ 5503.600	34.40	10.93	34.24	95.69	106.78	---	---	Peak

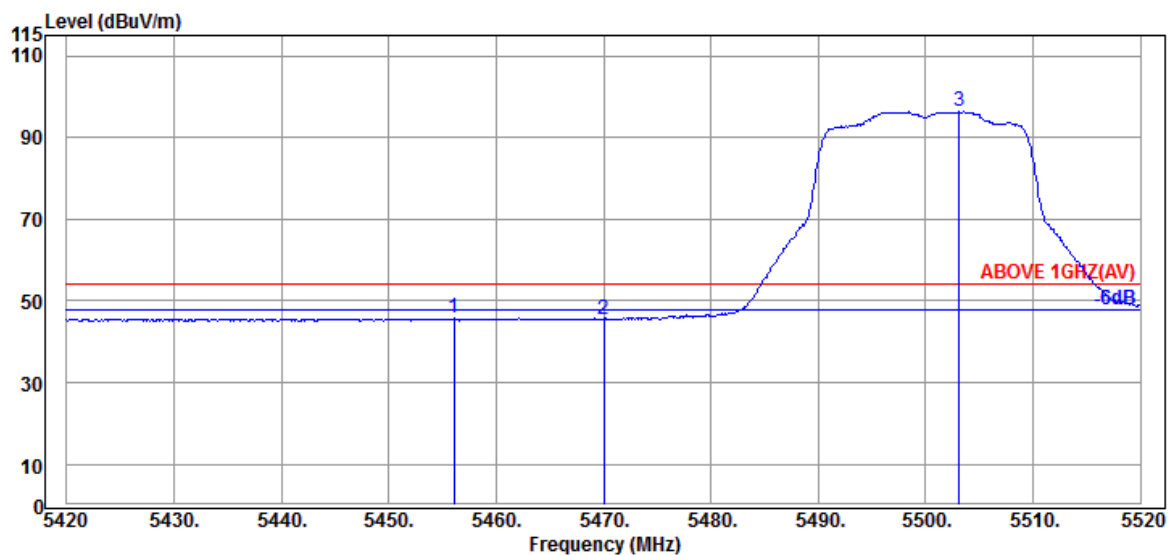

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.100	34.50	10.89	34.24	34.55	45.70	54.00	8.30	Average
5470.000	34.47	10.91	34.24	34.32	45.46	54.00	8.54	Average
@ 5503.100	34.40	10.93	34.24	85.29	96.38	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5700MHz

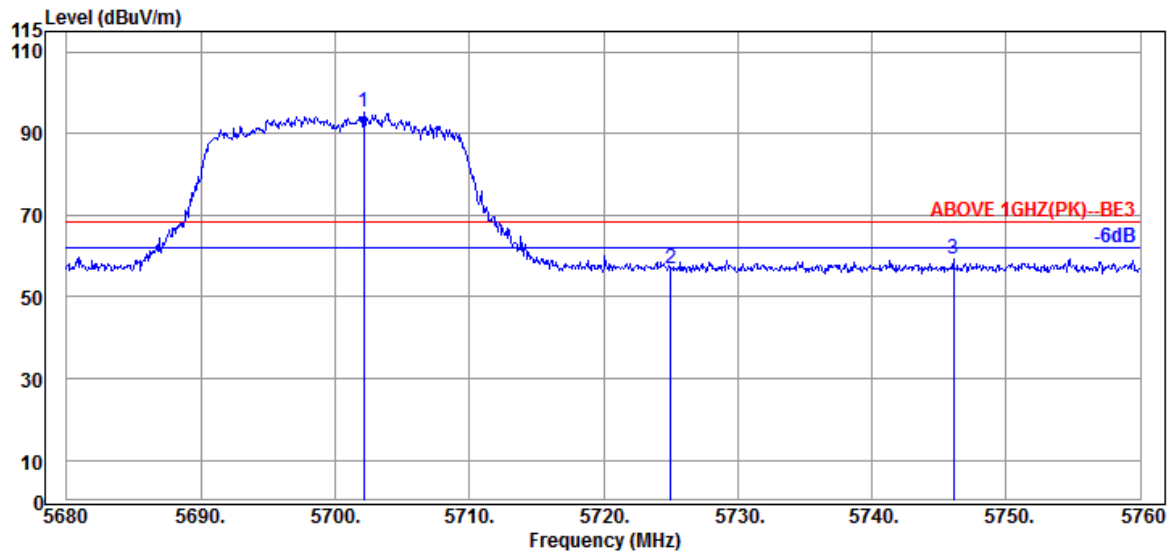

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5702.160	34.40	11.03	34.31	84.20	95.32	---	---	Peak
	5725.040	34.67	11.05	34.32	45.61	57.01	68.20	11.19	Peak
	5746.080	34.80	11.05	34.33	47.63	59.15	68.20	9.05	Peak

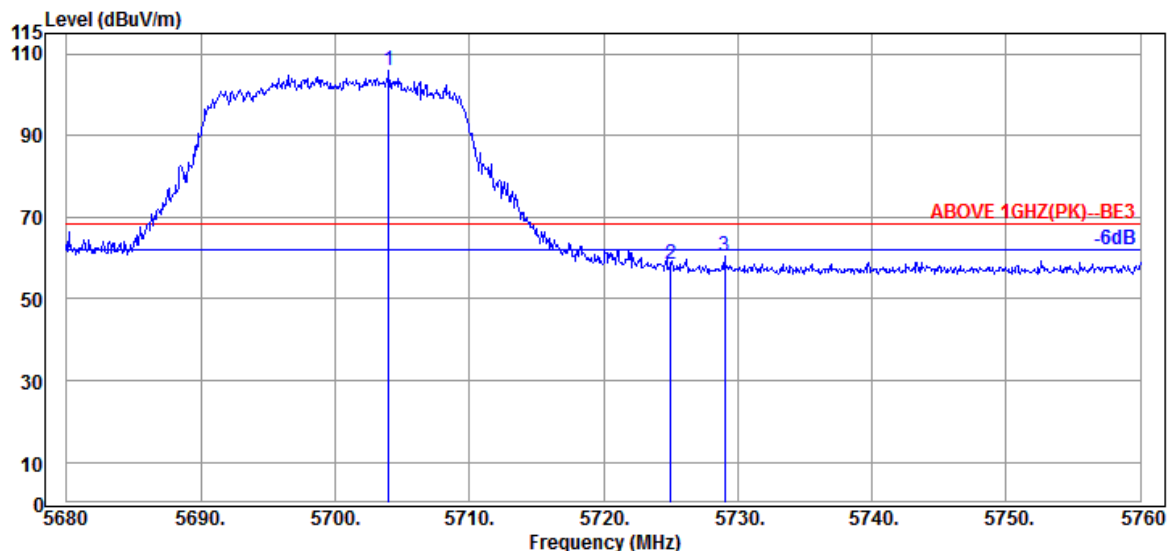

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5704.000	34.40	11.03	34.31	94.66	105.78	---	---	Peak
	5725.040	34.67	11.05	34.32	47.03	58.43	68.20	9.77	Peak
	5729.040	34.67	11.05	34.32	48.87	60.27	68.20	7.93	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

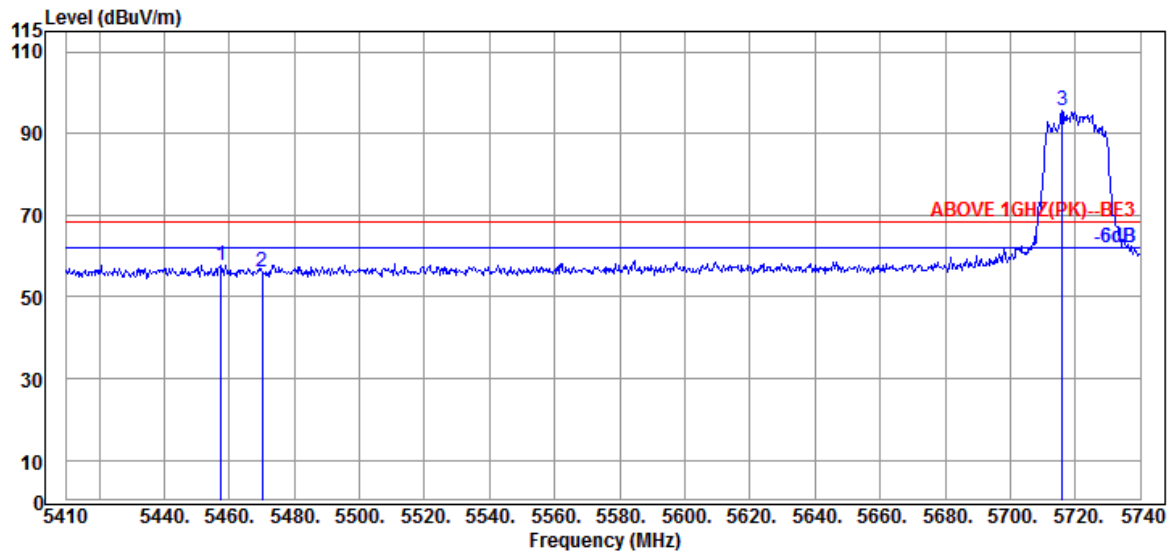

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.520	34.50	10.89	34.24	46.72	57.87	68.20	10.33	Peak
5470.060	34.47	10.91	34.24	44.81	55.95	68.20	12.25	Peak
@ 5715.910	34.53	11.05	34.32	84.26	95.52	---	---	Peak

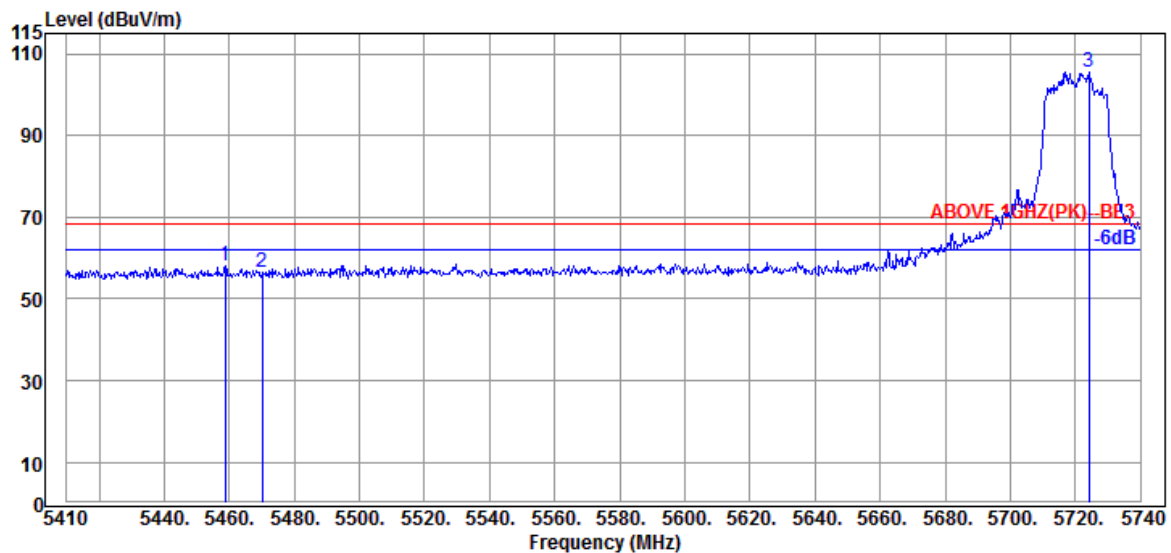

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.840	34.50	10.89	34.24	46.91	58.06	68.20	10.14	Peak
5470.060	34.47	10.91	34.24	45.33	56.47	68.20	11.73	Peak
@ 5724.160	34.67	11.05	34.32	94.20	105.60	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

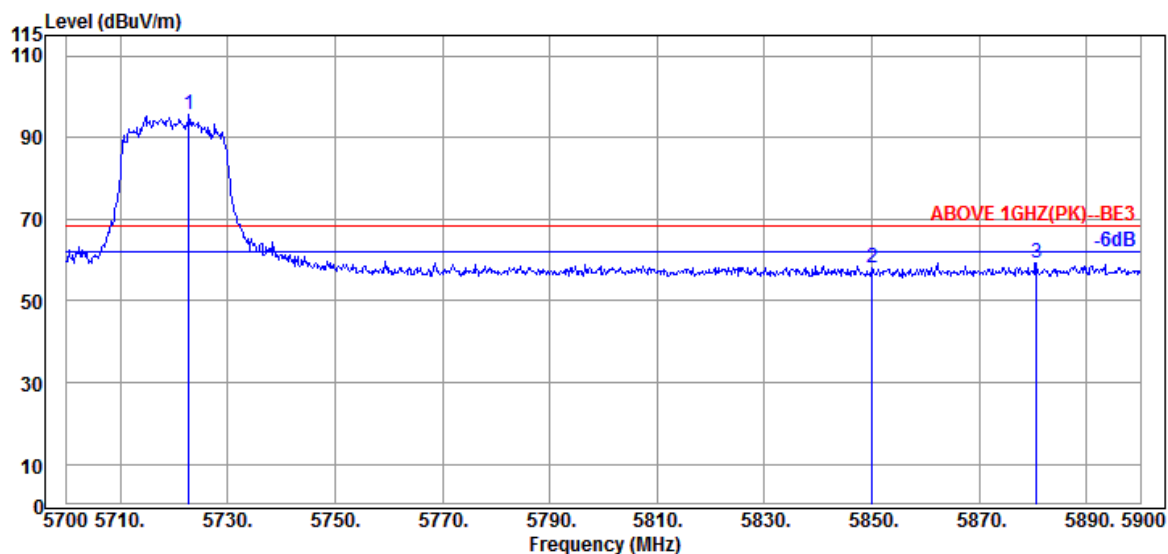

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5722.800	34.67	11.05	34.32	84.30	95.70	---	---	Peak
	5850.000	35.10	11.10	34.38	46.33	58.15	68.20	10.05	Peak
	5880.600	35.30	11.12	34.39	47.31	59.34	68.20	8.86	Peak

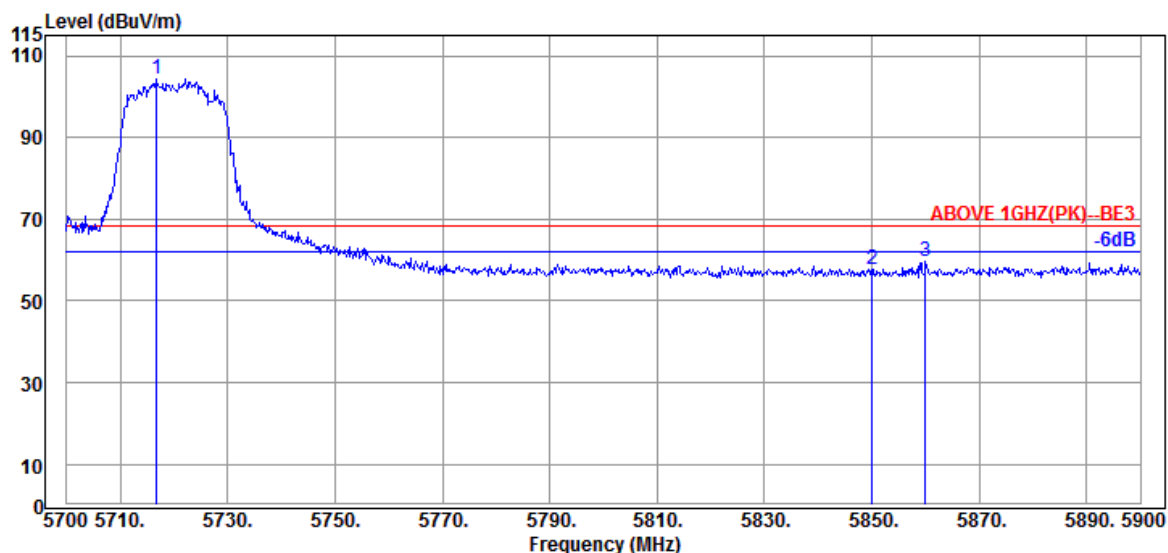

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5716.800	34.53	11.05	34.32	93.06	104.32	---	---	Peak
	5850.000	35.10	11.10	34.38	46.04	57.86	68.20	10.34	Peak
	5860.000	35.20	11.12	34.39	47.56	59.49	68.20	8.71	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-HE20	U-NII Band	III
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

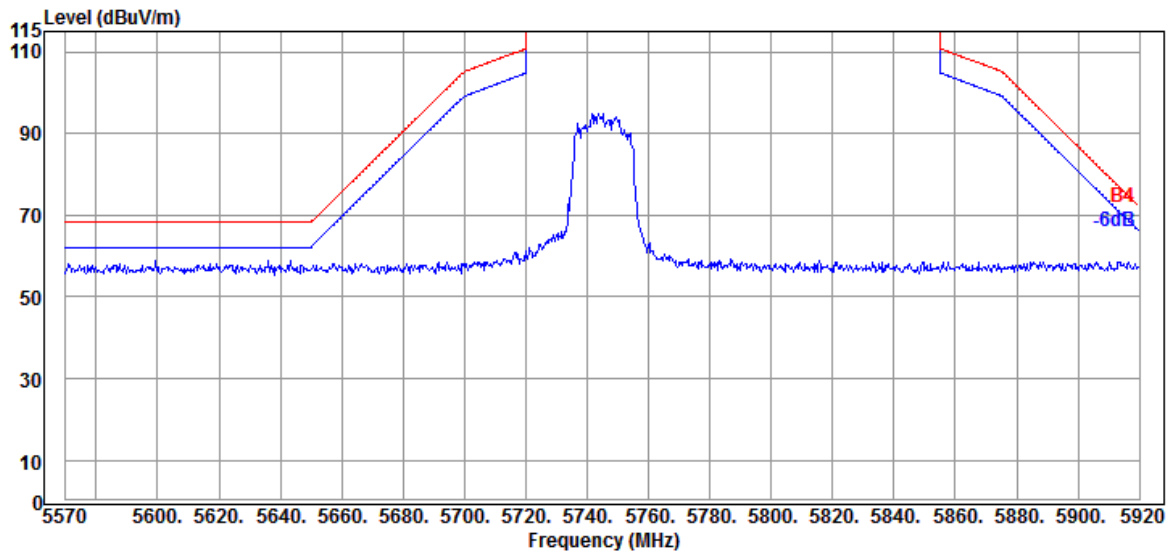

Antenna at Vertical Polarization

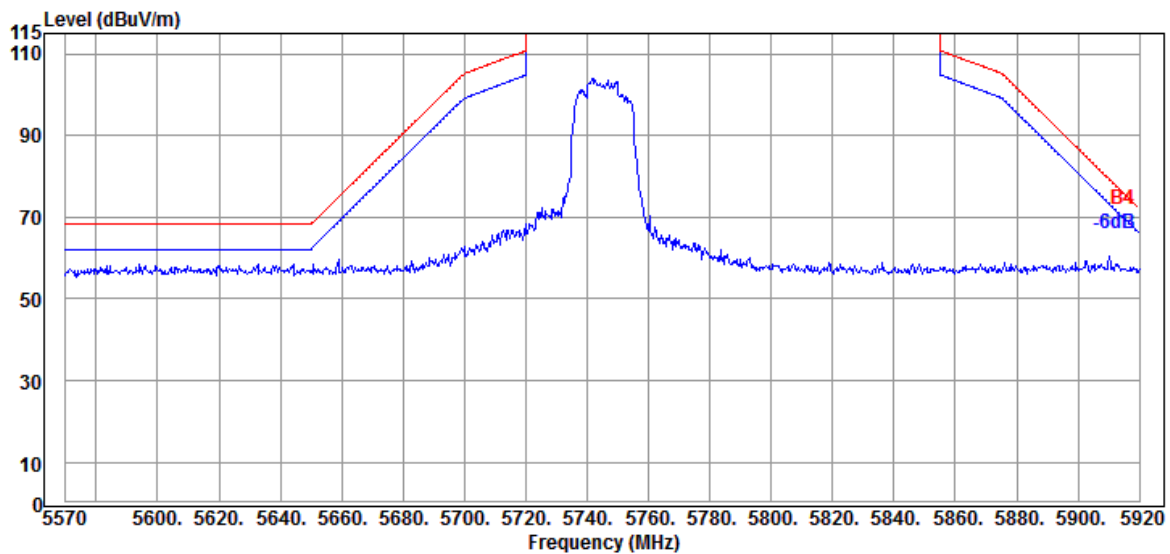


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-HE20	U-NII Band	III
		Frequency	TX 5825MHz

Antenna at Horizontal Polarization

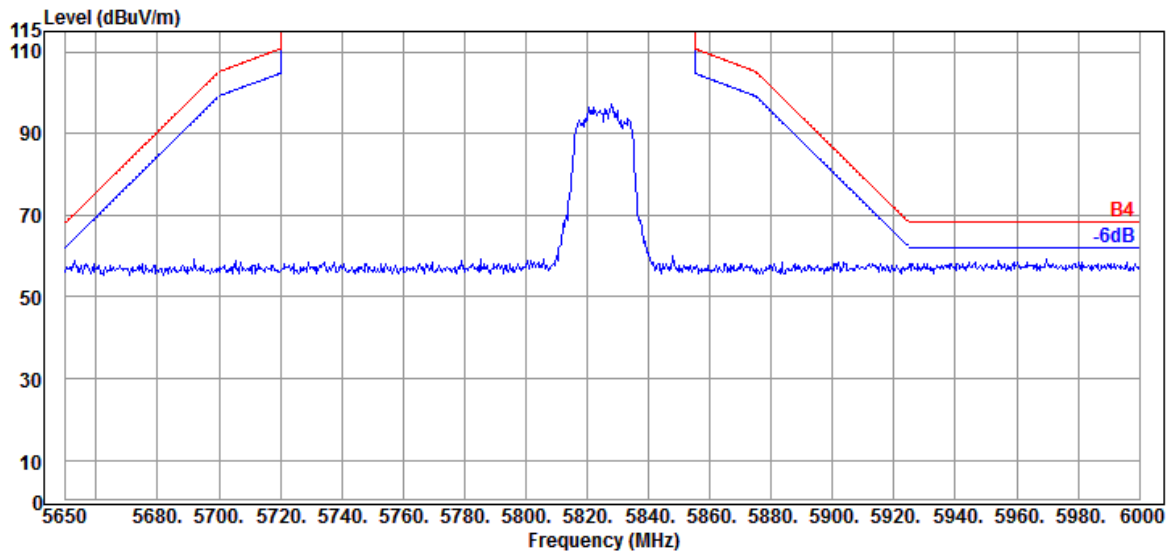

Antenna at Vertical Polarization

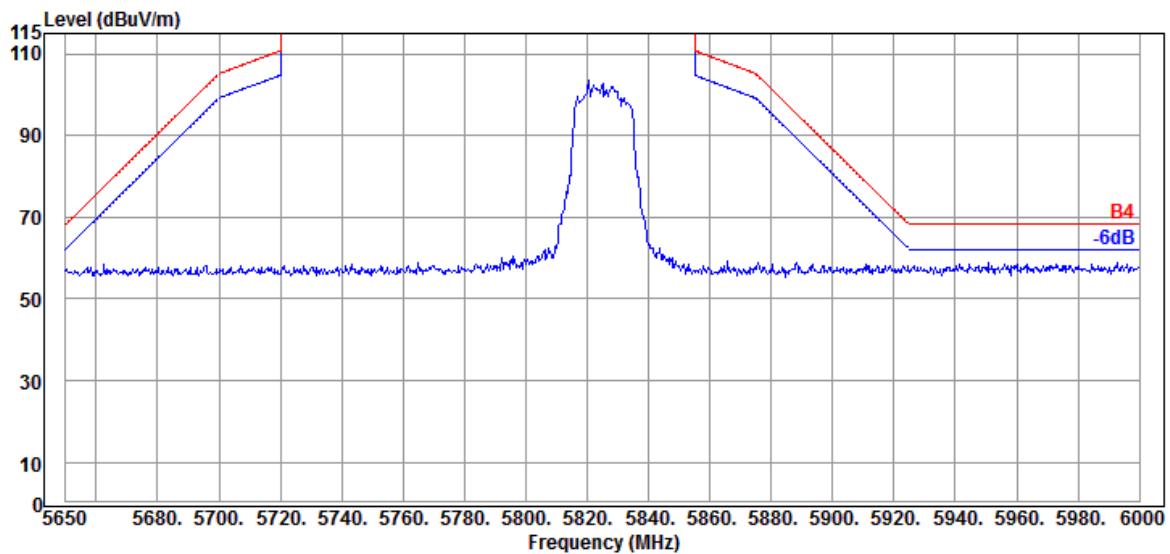

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	I
		Frequency	TX 5190MHz

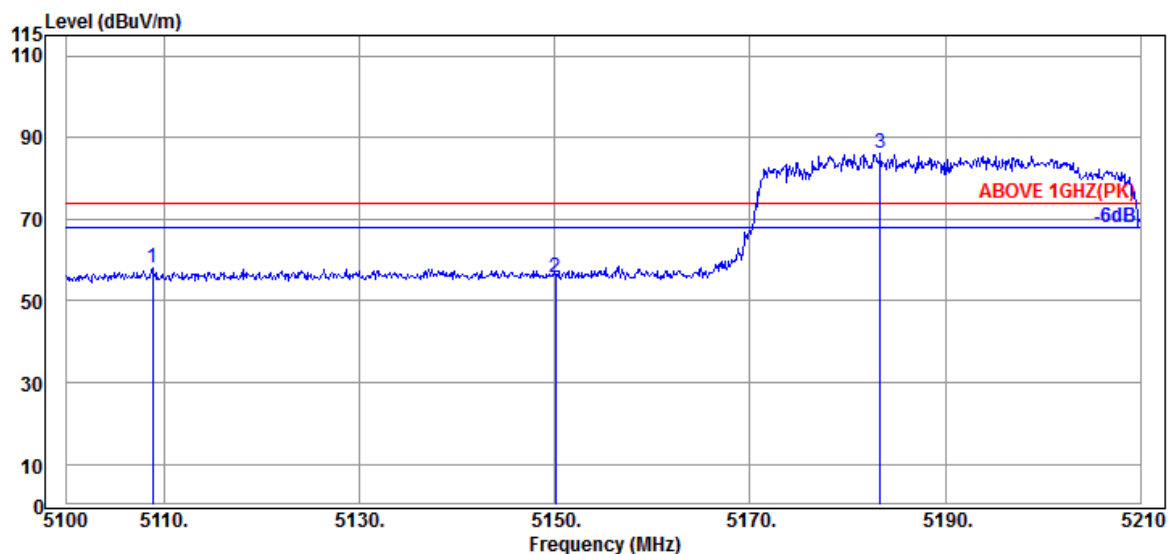

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5108.800	34.10	10.68	34.36	47.64	58.06	74.00	15.94	Peak
5150.050	34.20	10.70	34.35	45.31	55.86	74.00	18.14	Peak
@ 5183.380	34.20	10.72	34.34	75.56	86.14	---	---	Peak

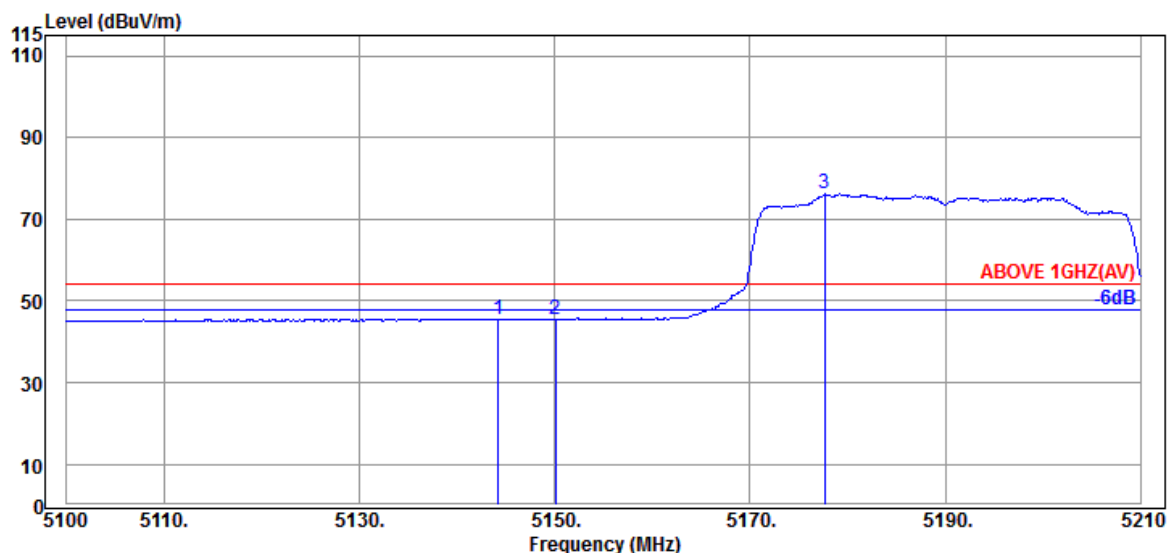

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.220	34.20	10.70	34.35	35.08	45.63	54.00	8.37	Average
5150.050	34.20	10.70	34.35	34.84	45.39	54.00	8.61	Average
@ 5177.660	34.20	10.72	34.34	65.70	76.28	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	I
		Frequency	TX 5190MHz

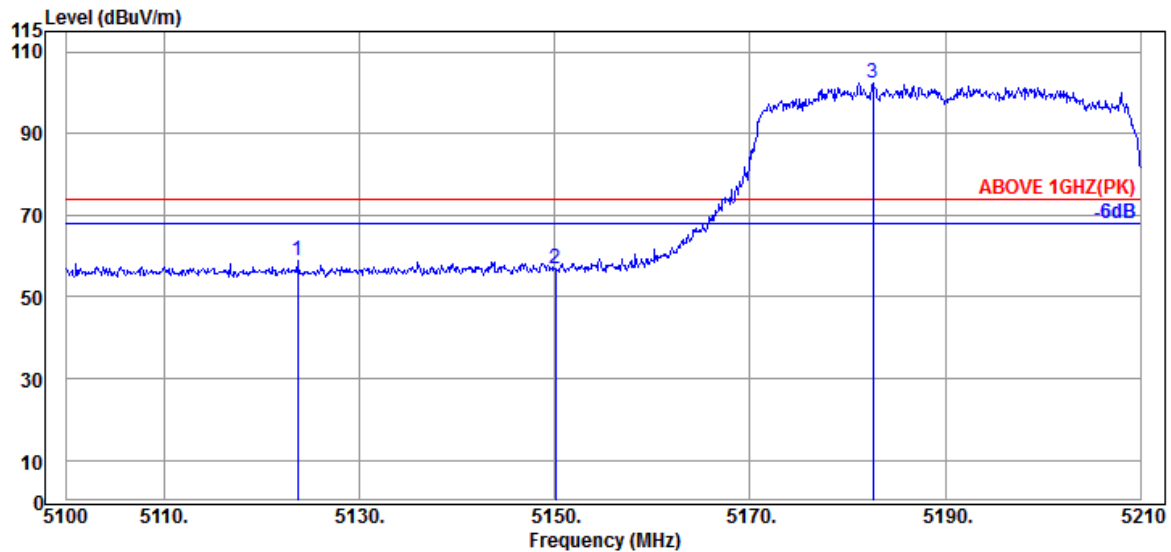

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5123.650	34.13	10.70	34.36	48.53	59.00	74.00	15.00	Peak
5150.050	34.20	10.70	34.35	46.51	57.06	74.00	16.94	Peak
@ 5182.610	34.20	10.72	34.34	91.81	102.39	---	---	Peak

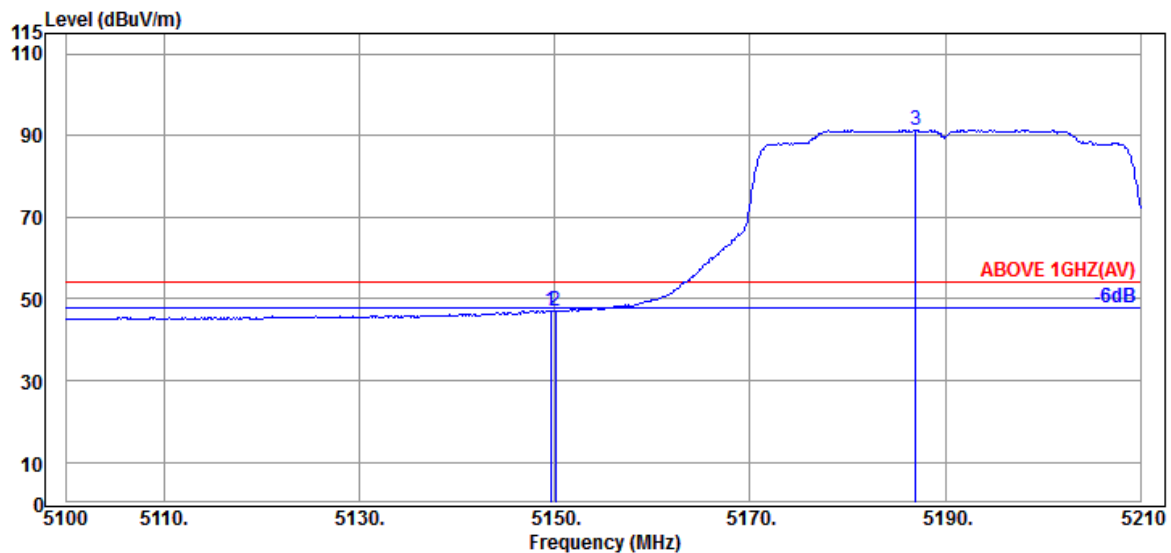

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.610	34.20	10.70	34.35	36.55	47.10	54.00	6.90	Average
5150.050	34.20	10.70	34.35	36.62	47.17	54.00	6.83	Average
@ 5187.010	34.20	10.72	34.34	80.82	91.40	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

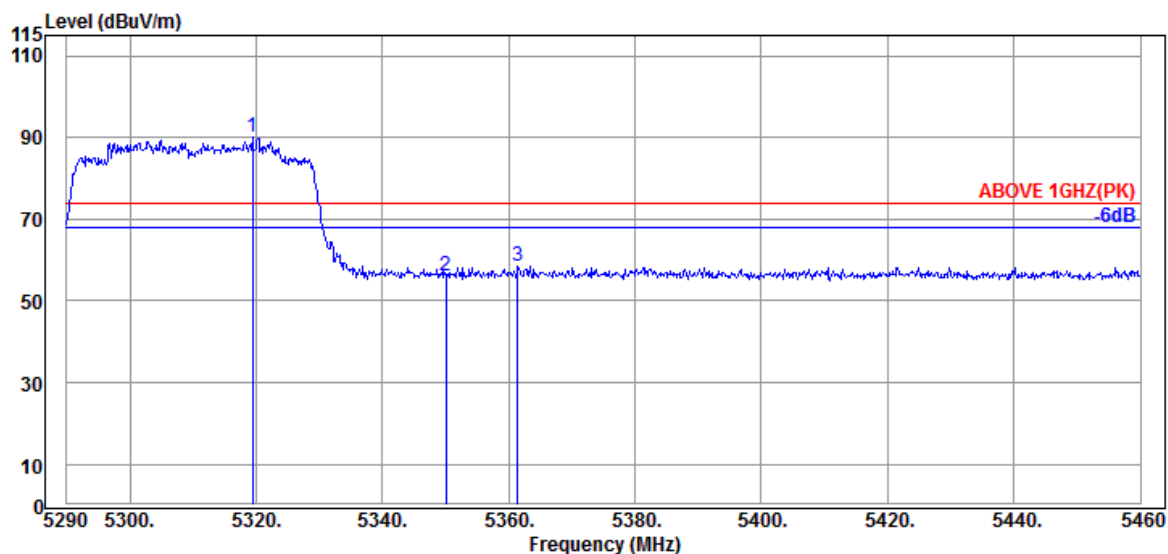

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5319.410	34.53	10.81	34.29	79.09	90.14	---	---	Peak
5350.010	34.60	10.83	34.27	44.97	56.13	74.00	17.87	Peak
5361.400	34.63	10.85	34.27	47.25	58.46	74.00	15.54	Peak

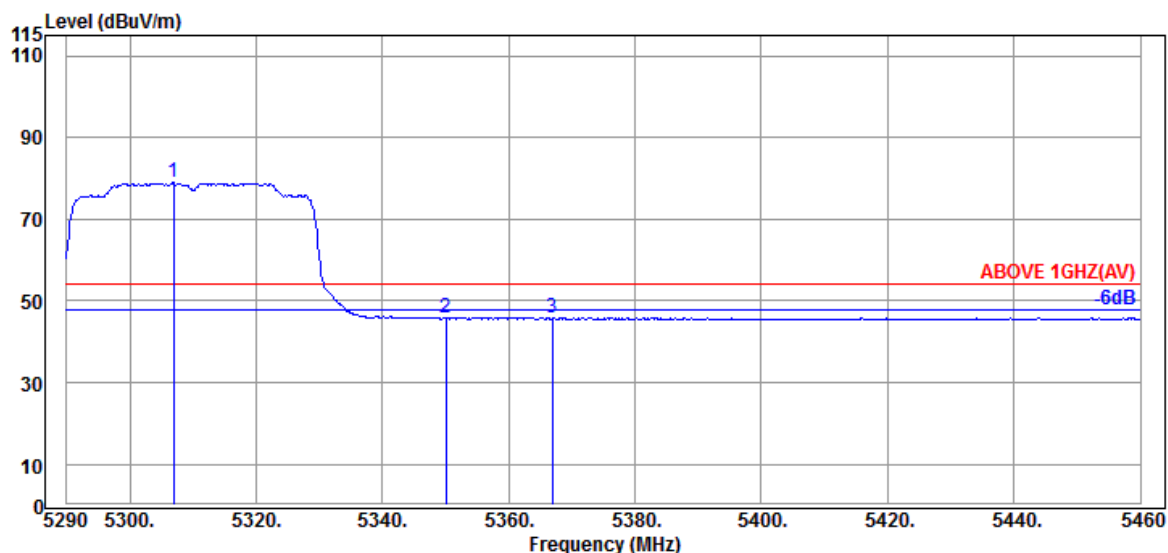

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5307.000	34.50	10.81	34.29	67.86	78.88	---	---	Average
5350.010	34.60	10.83	34.27	34.49	45.65	54.00	8.35	Average
5366.840	34.63	10.85	34.27	34.83	46.04	54.00	7.96	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

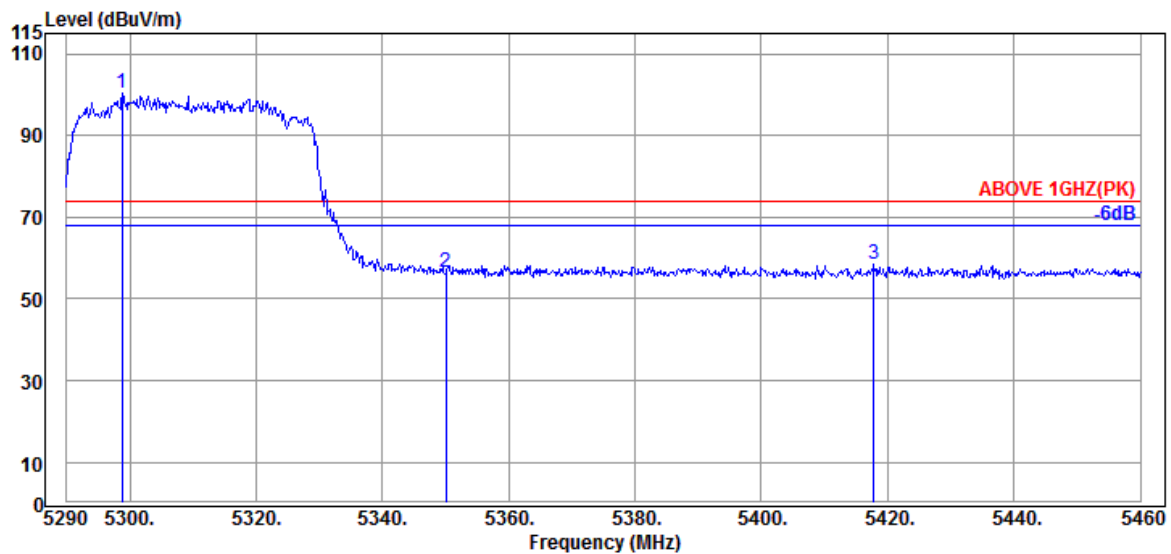

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5298.840	34.50	10.81	34.29	89.32	100.34	---	---	Peak
	5350.010	34.60	10.83	34.27	45.19	56.35	74.00	17.65	Peak
	5417.840	34.60	10.87	34.26	47.11	58.32	74.00	15.68	Peak

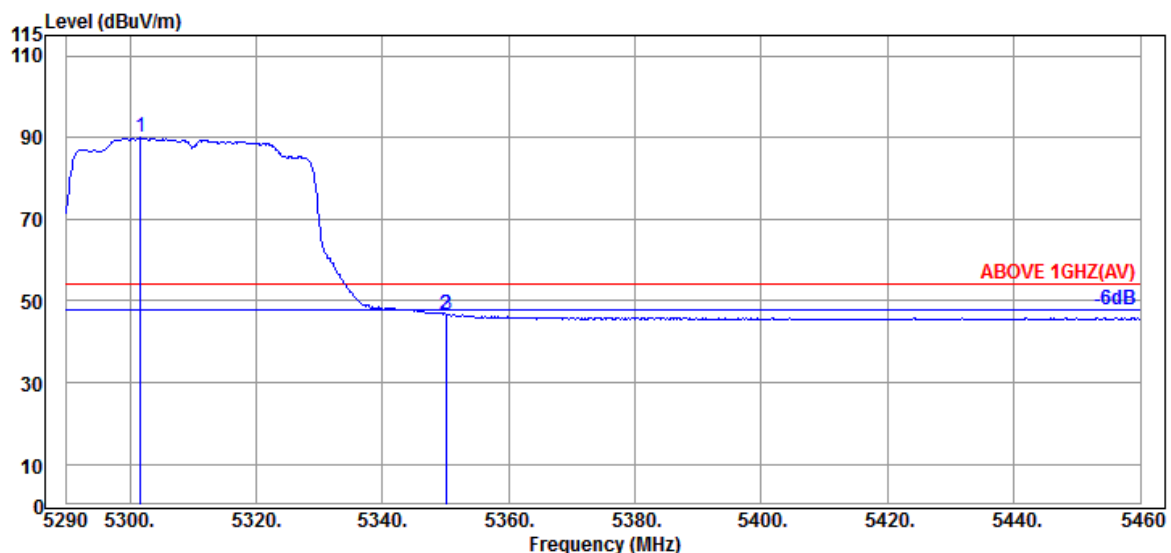

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5301.730	34.50	10.81	34.29	78.92	89.94	---	---	Average
	5350.010	34.60	10.83	34.27	35.64	46.80	54.00	7.20	Average
	5350.180	34.60	10.83	34.27	35.64	46.80	54.00	7.20	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

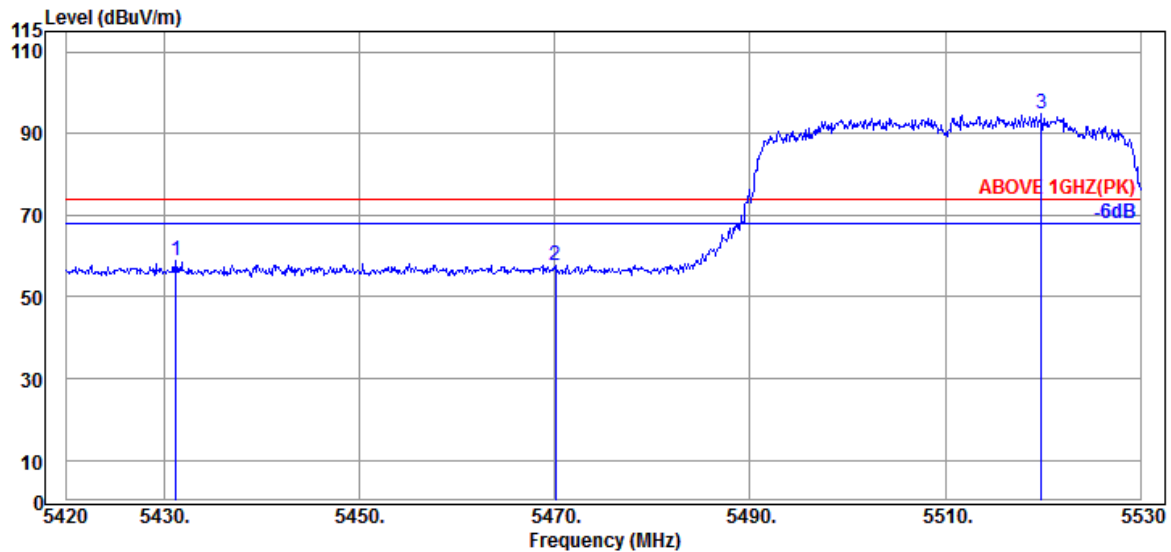

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5431.220	34.60	10.89	34.25	47.61	58.85	74.00	15.15	Peak
5470.050	34.47	10.91	34.24	46.40	57.54	74.00	16.46	Peak
@ 5519.880	34.37	10.93	34.24	83.72	94.78	---	---	Peak

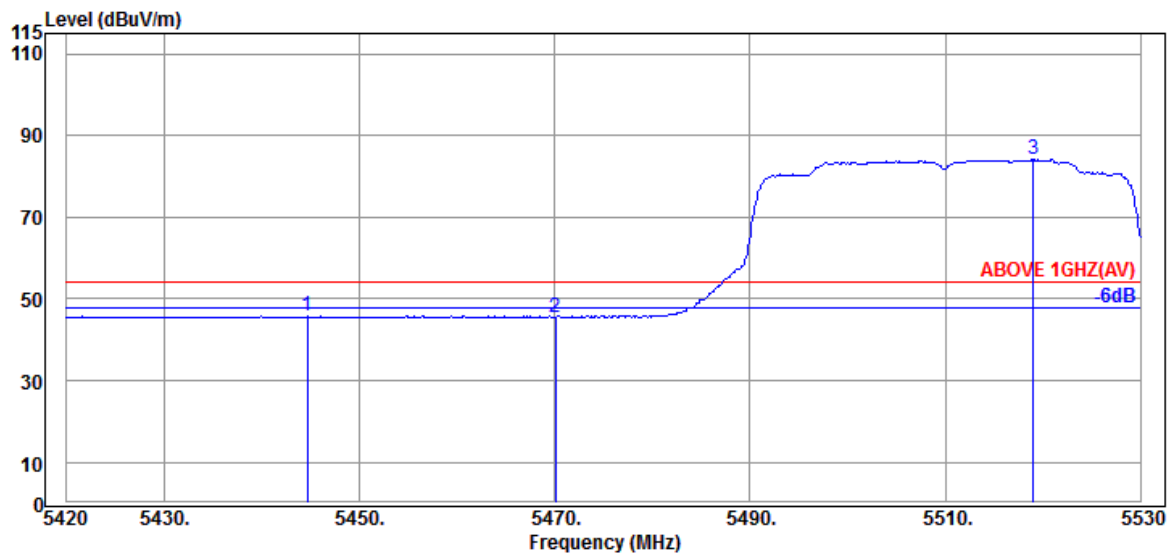

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5444.640	34.55	10.89	34.25	34.63	45.82	54.00	8.18	Average
5470.050	34.47	10.91	34.24	34.49	45.63	54.00	8.37	Average
@ 5519.000	34.37	10.93	34.24	73.01	84.07	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

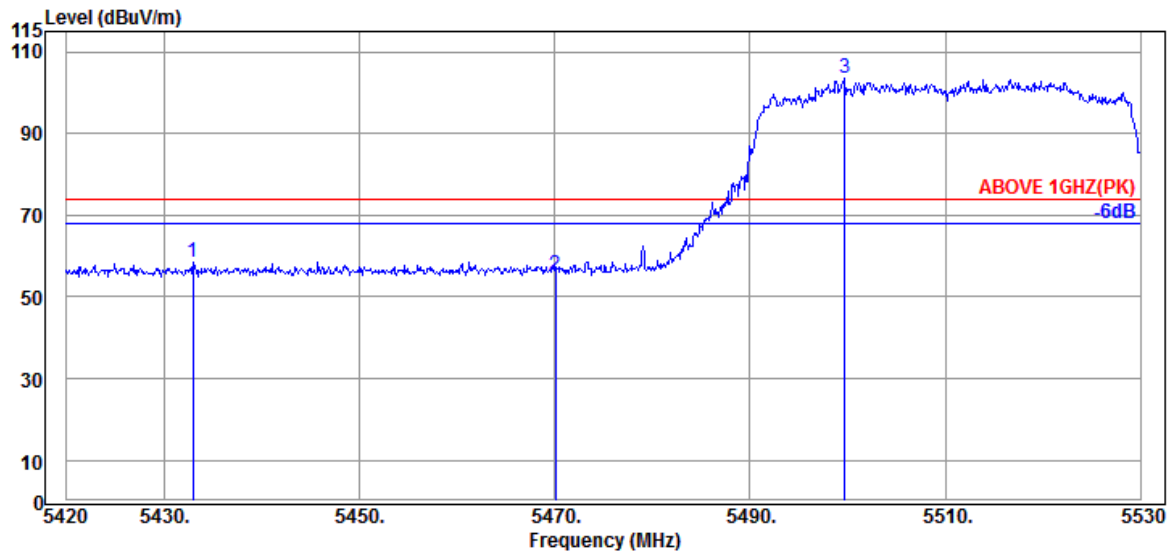

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5432.980	34.55	10.89	34.25	47.19	58.38	74.00	15.62	Peak
5470.050	34.47	10.91	34.24	44.36	55.50	74.00	18.50	Peak
@ 5499.750	34.40	10.93	34.23	92.32	103.42	---	---	Peak

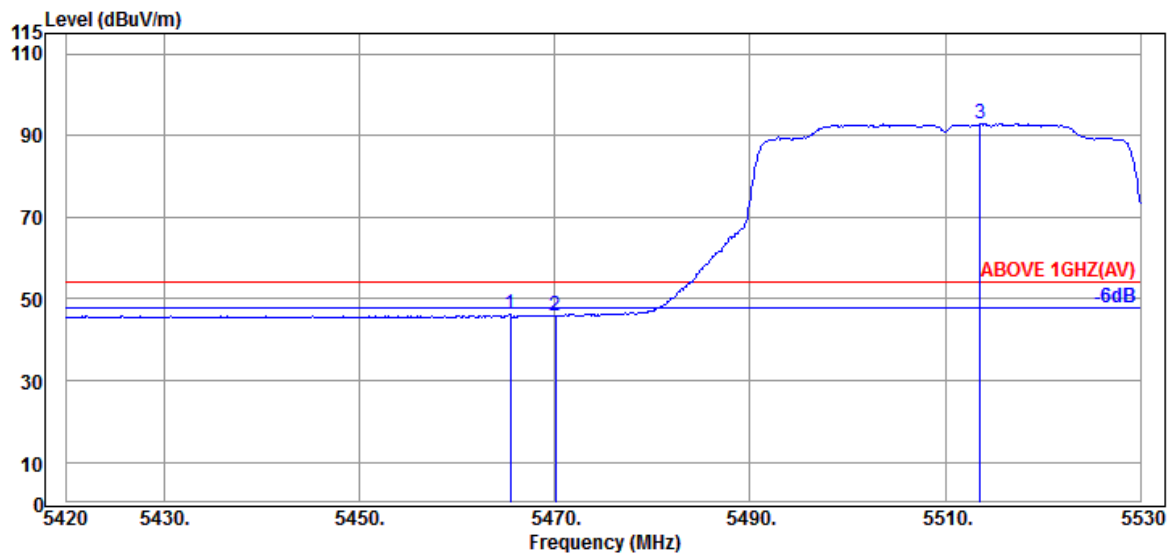

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.430	34.47	10.91	34.24	34.96	46.10	54.00	7.90	Average
5470.050	34.47	10.91	34.24	34.75	45.89	54.00	8.11	Average
@ 5513.610	34.37	10.93	34.24	81.84	92.90	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5670MHz

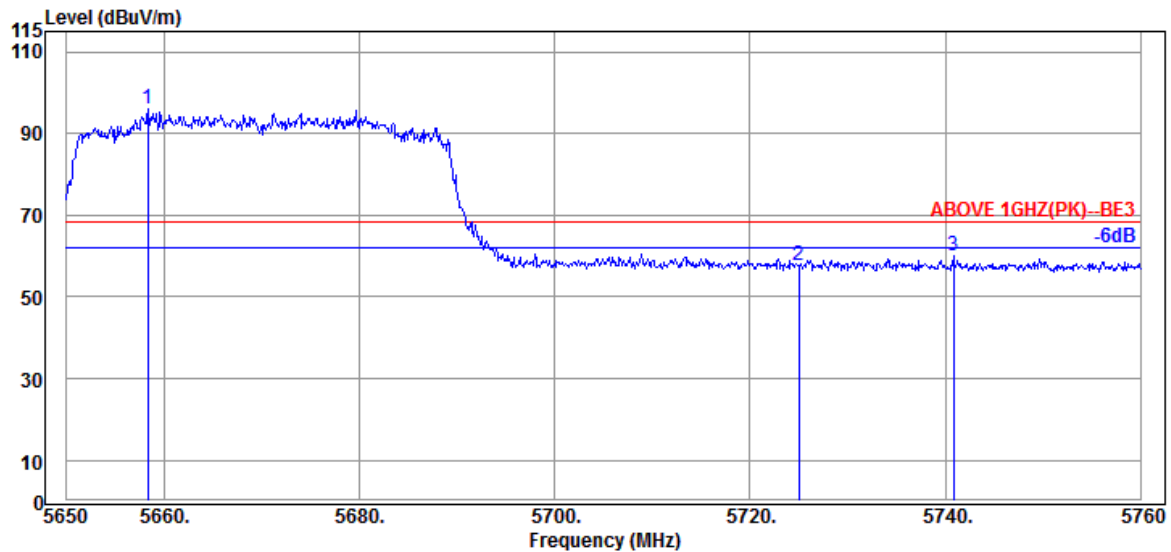

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5658.360	34.40	11.01	34.30	84.96	96.07	---	---	Peak
	5725.020	34.67	11.05	34.32	46.29	57.69	68.20	10.51	Peak
	5740.860	34.80	11.05	34.33	48.59	60.11	68.20	8.09	Peak

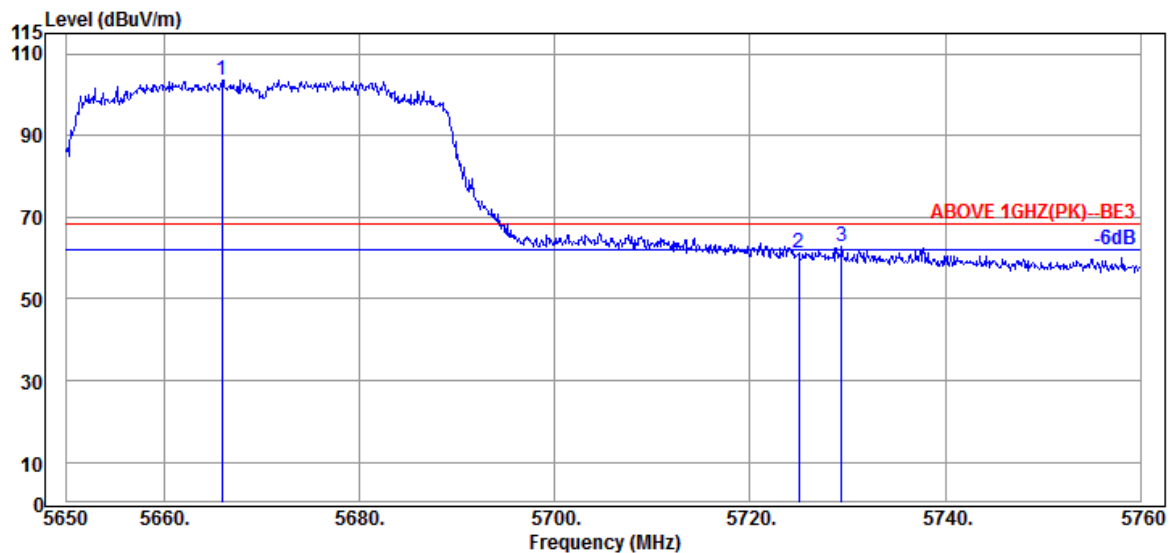

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5665.950	34.40	11.01	34.30	92.61	103.72	---	---	Peak
	5725.020	34.67	11.05	34.32	49.79	61.19	68.20	7.01	Peak
	5729.420	34.67	11.05	34.32	51.28	62.68	68.20	5.52	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

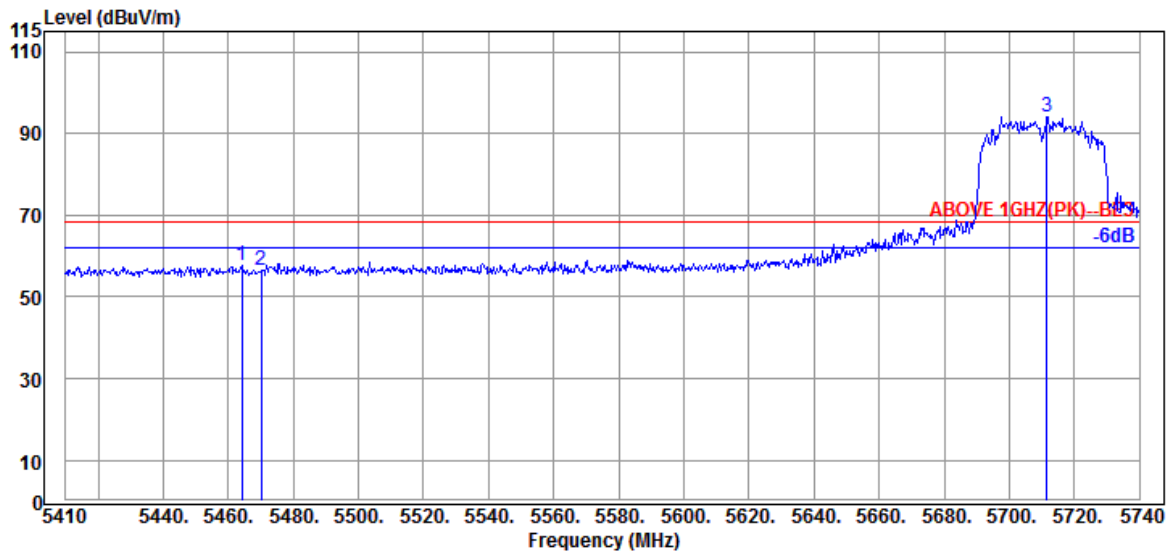

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.120	34.47	10.91	34.24	46.62	57.76	68.20	10.44	Peak
5470.060	34.47	10.91	34.24	45.30	56.44	68.20	11.76	Peak
@ 5711.620	34.53	11.05	34.32	82.91	94.17	---	---	Peak

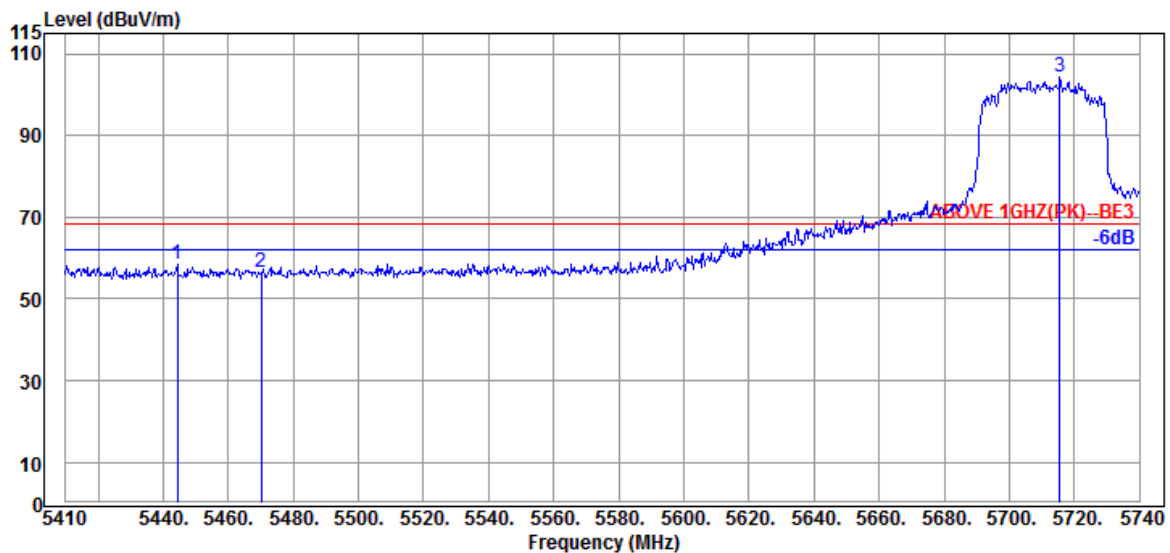

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5444.320	34.55	10.89	34.25	47.19	58.38	68.20	9.82	Peak
5470.060	34.47	10.91	34.24	45.18	56.32	68.20	11.88	Peak
@ 5715.580	34.53	11.05	34.32	92.99	104.25	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

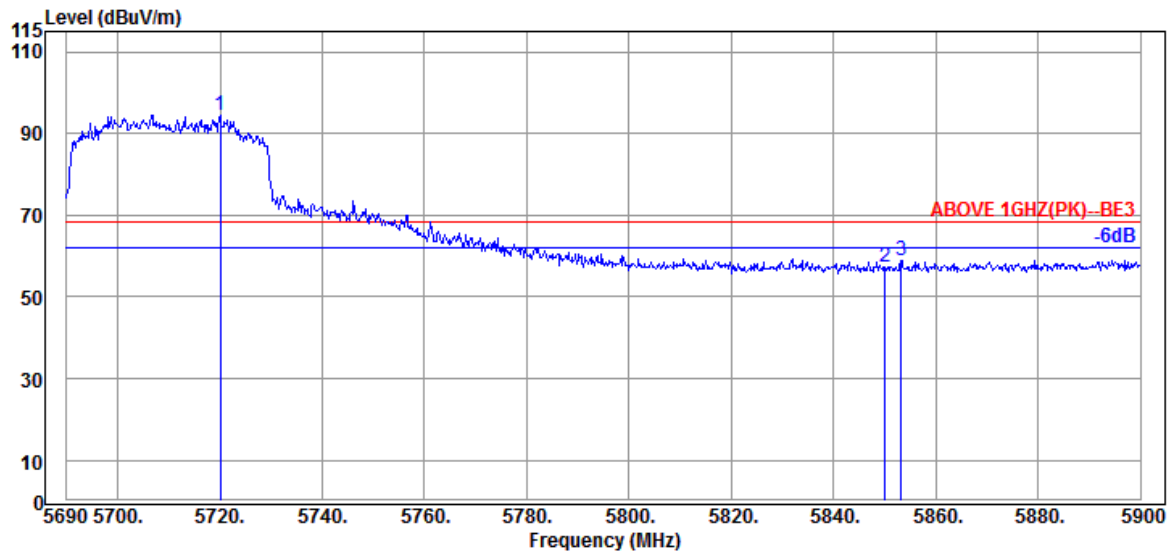

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5720.030	34.53	11.05	34.32	83.24	94.50	---	---	Peak
	5850.020	35.10	11.10	34.38	45.33	57.15	68.20	11.05	Peak
	5853.170	35.10	11.10	34.38	47.21	59.03	68.20	9.17	Peak

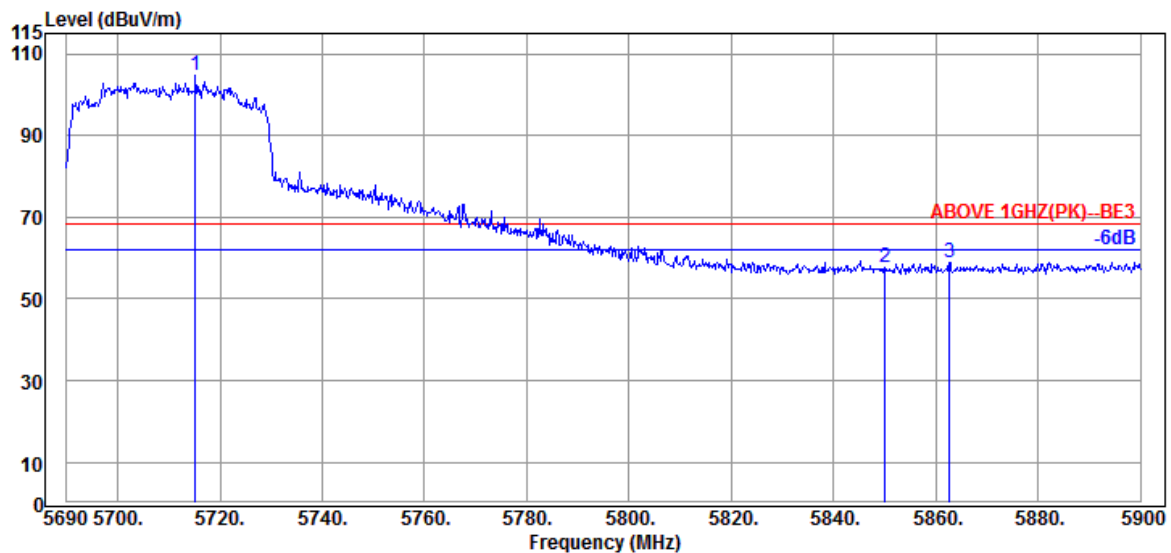

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5715.200	34.53	11.05	34.32	93.55	104.81	---	---	Peak
	5850.020	35.10	11.10	34.38	45.83	57.65	68.20	10.55	Peak
	5862.620	35.20	11.12	34.39	47.12	59.05	68.20	9.15	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	III
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

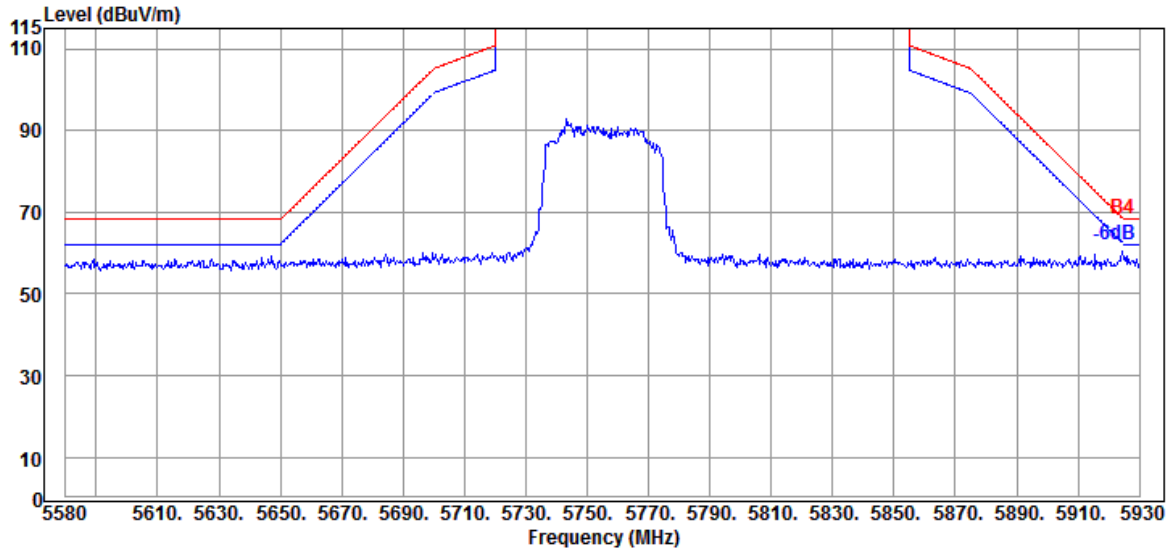

Antenna at Vertical Polarization

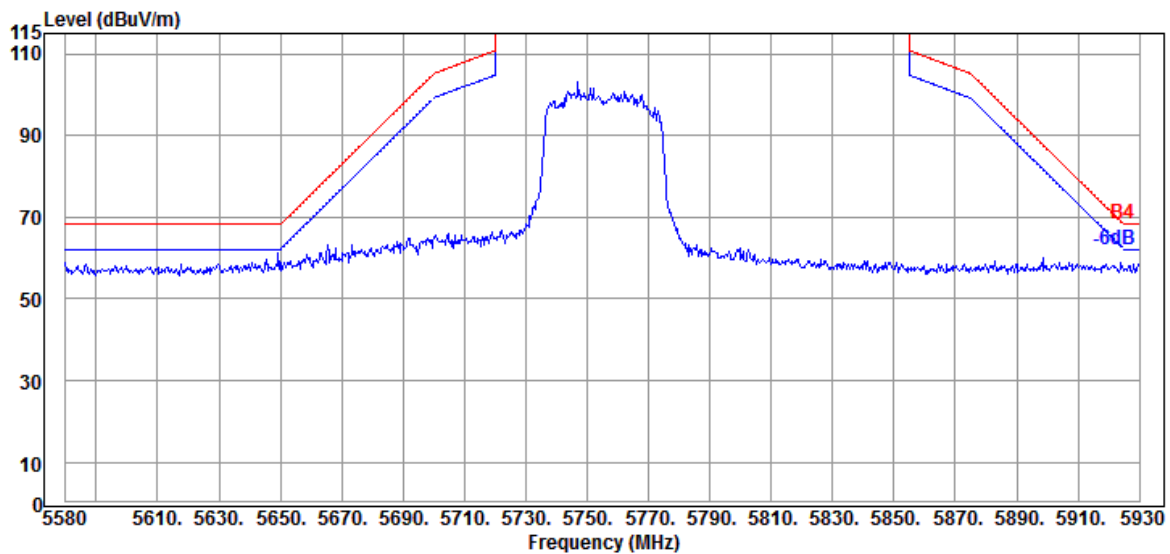


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	III
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

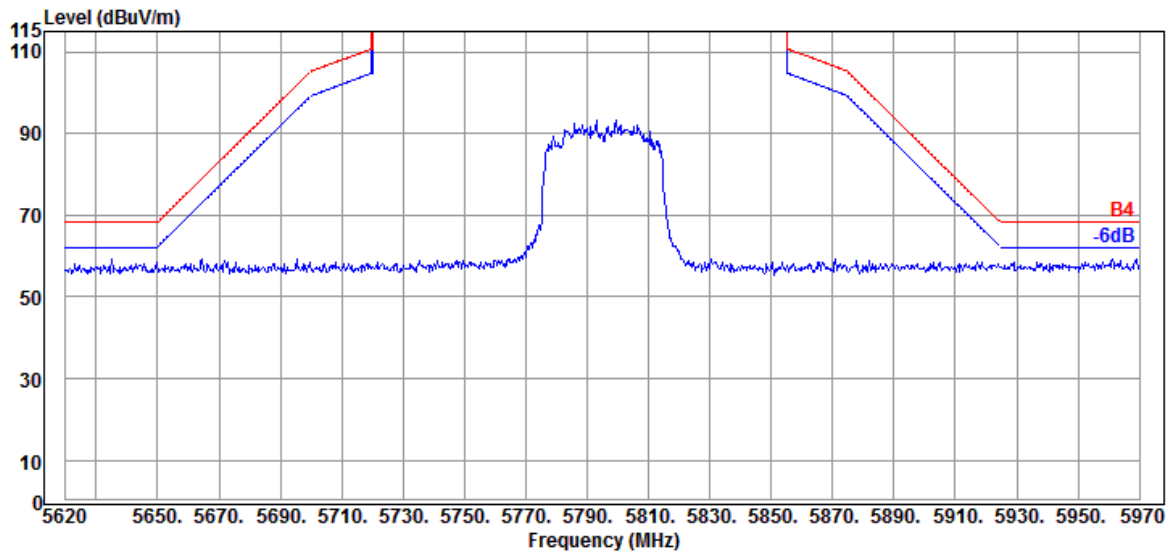

Antenna at Vertical Polarization

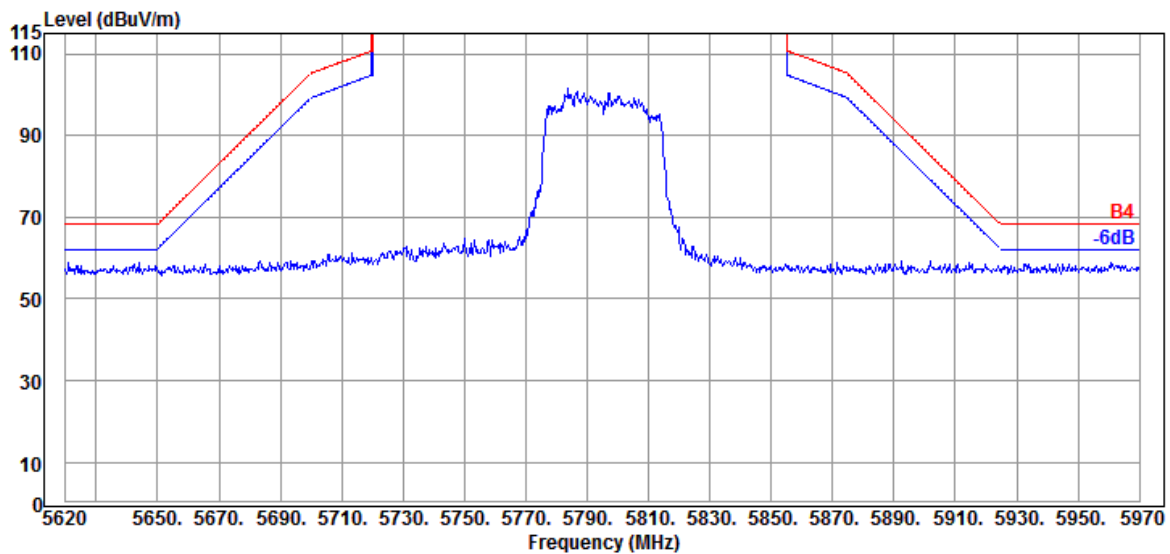

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	I
		Frequency	TX 5210MHz

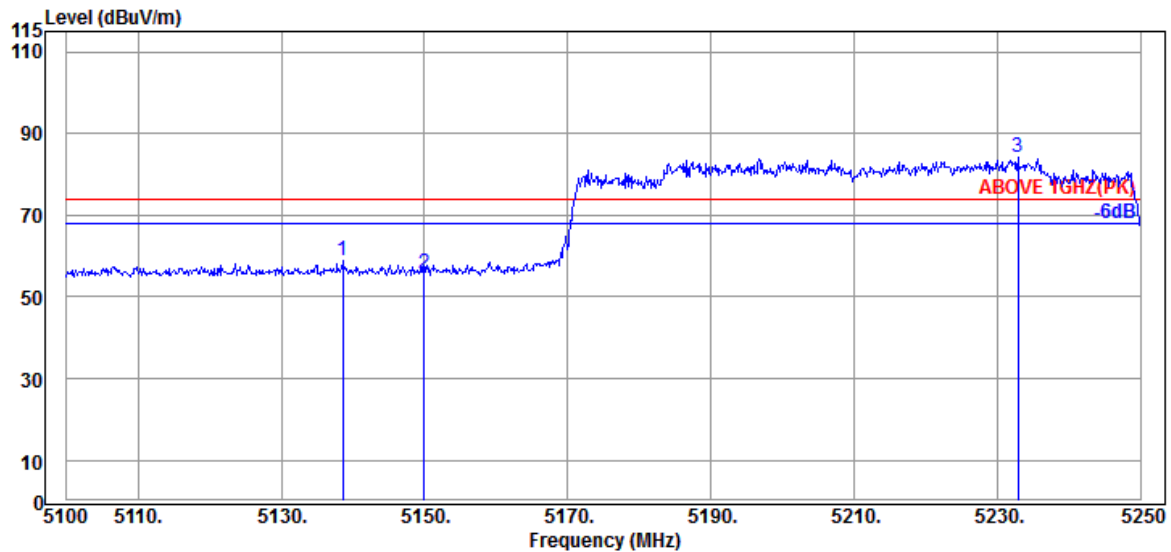

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5138.550	34.17	10.70	34.36	48.34	58.85	74.00	15.15	Peak
5149.950	34.20	10.70	34.35	45.24	55.79	74.00	18.21	Peak
@ 5232.900	34.35	10.76	34.32	73.26	84.05	---	---	Peak

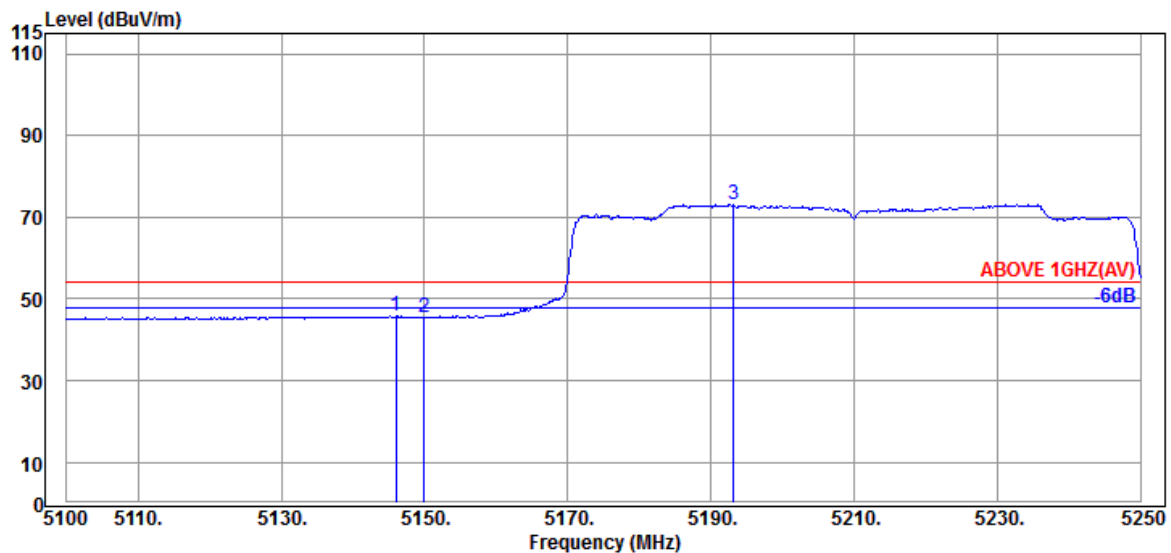

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.050	34.20	10.70	34.35	35.18	45.73	54.00	8.27	Average
5149.950	34.20	10.70	34.35	35.04	45.59	54.00	8.41	Average
@ 5193.150	34.20	10.74	34.34	62.48	73.08	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	I
		Frequency	TX 5210MHz

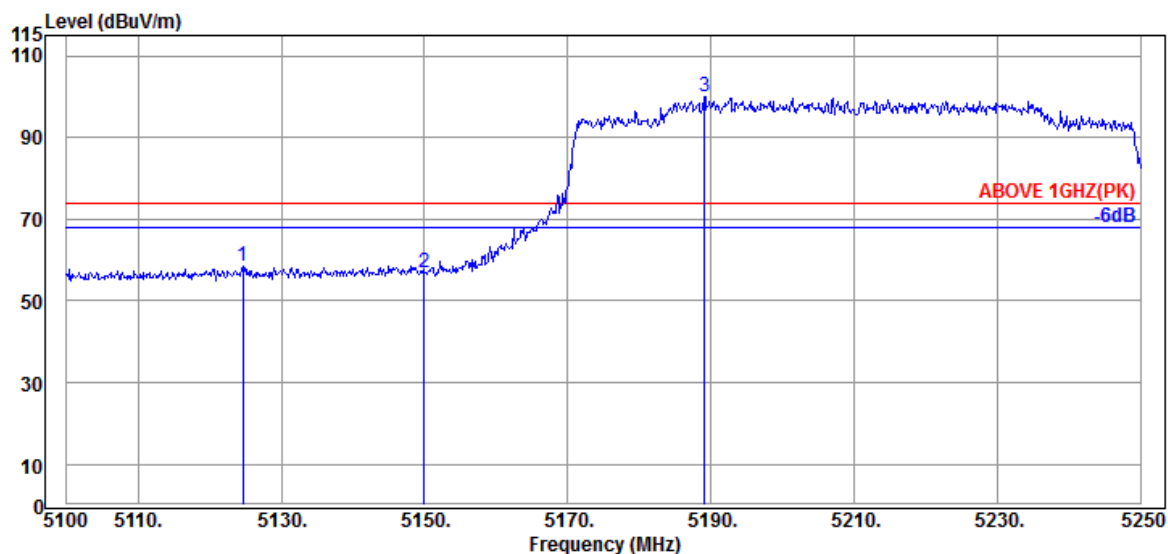

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5124.600	34.13	10.70	34.36	48.12	58.59	74.00	15.41	Peak
5149.950	34.20	10.70	34.35	46.23	56.78	74.00	17.22	Peak
@ 5189.100	34.20	10.74	34.34	89.51	100.11	---	---	Peak

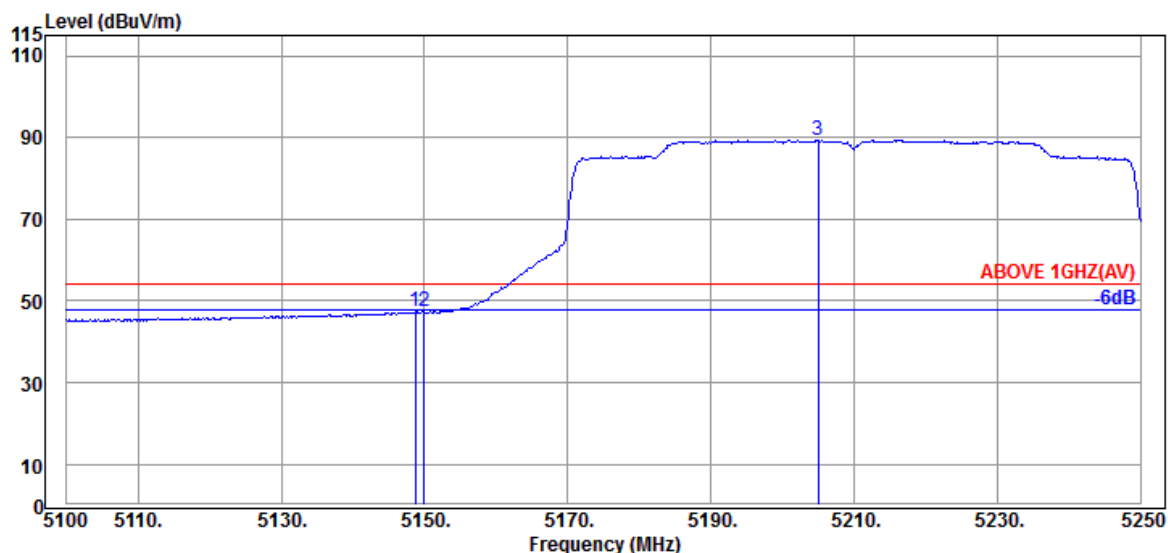

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.750	34.20	10.70	34.35	36.74	47.29	54.00	6.71	Average
5149.950	34.20	10.70	34.35	36.76	47.31	54.00	6.69	Average
@ 5205.000	34.25	10.74	34.33	78.69	89.35	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

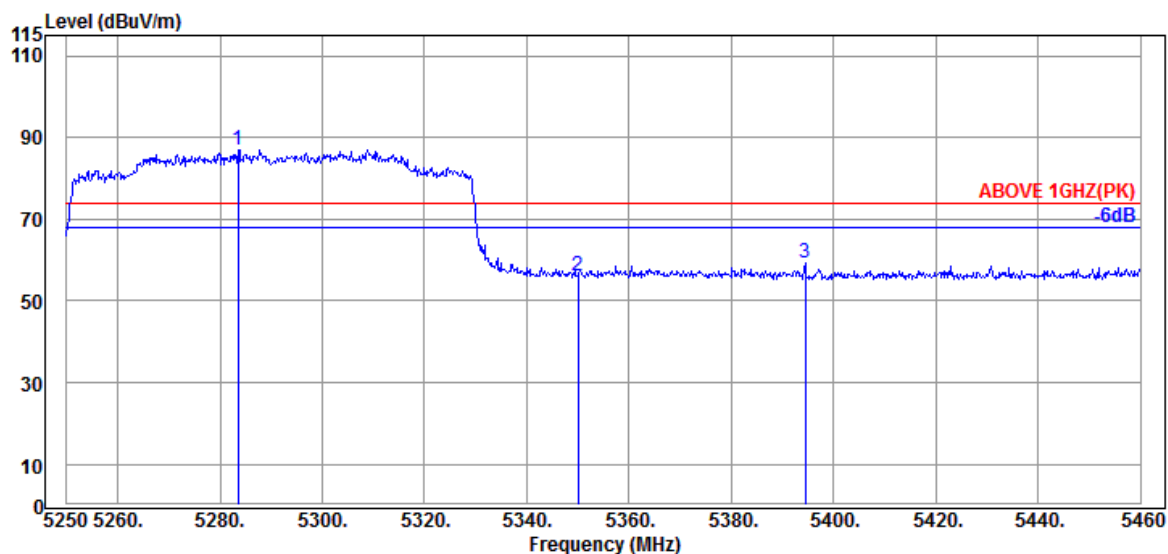

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5283.600	34.47	10.79	34.30	76.14	87.10	---	---	Peak
5349.960	34.60	10.83	34.27	44.94	56.10	74.00	17.90	Peak
5394.480	34.70	10.87	34.27	48.02	59.32	74.00	14.68	Peak

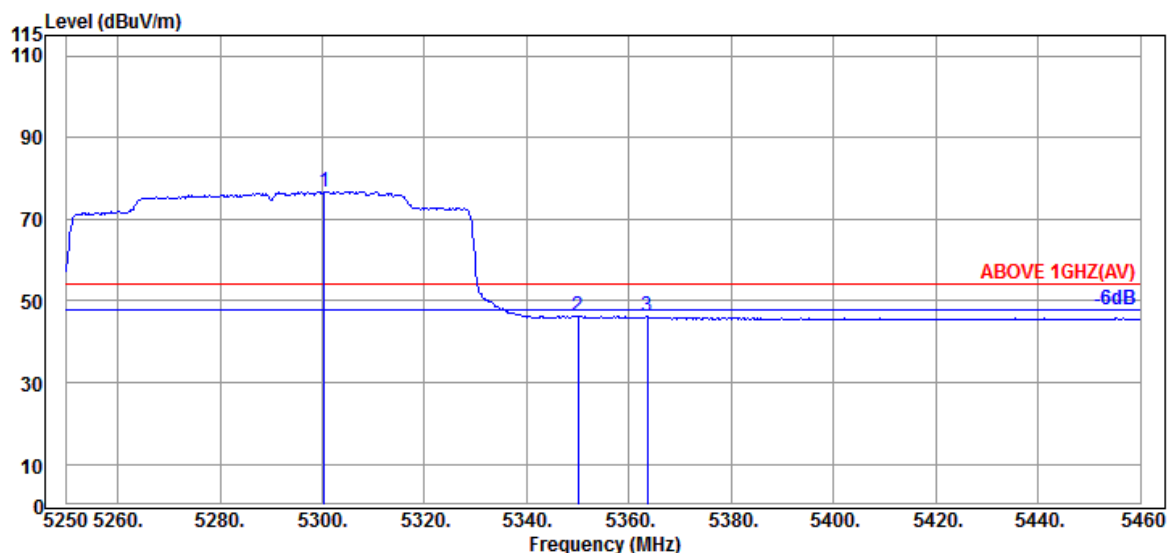

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5300.400	34.50	10.81	34.29	65.77	76.79	---	---	Average
5349.960	34.60	10.83	34.27	35.01	46.17	54.00	7.83	Average
5363.610	34.63	10.85	34.27	35.02	46.23	54.00	7.77	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

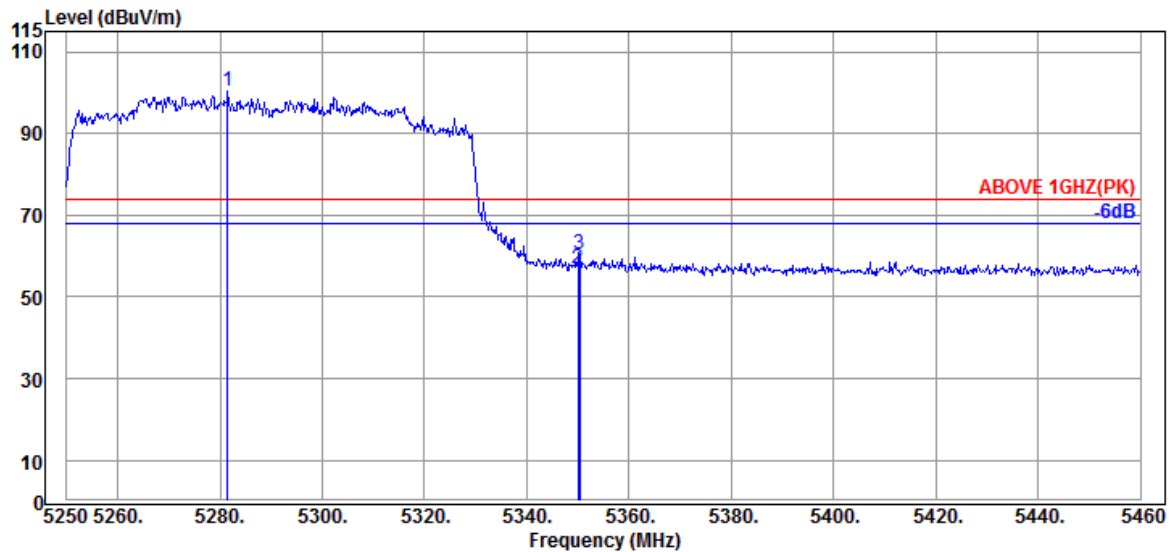

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5281.500	34.47	10.79	34.30	89.34	100.30	---	---	Peak
5349.960	34.60	10.83	34.27	45.90	57.06	74.00	16.94	Peak
5350.380	34.60	10.83	34.27	49.11	60.27	74.00	13.73	Peak

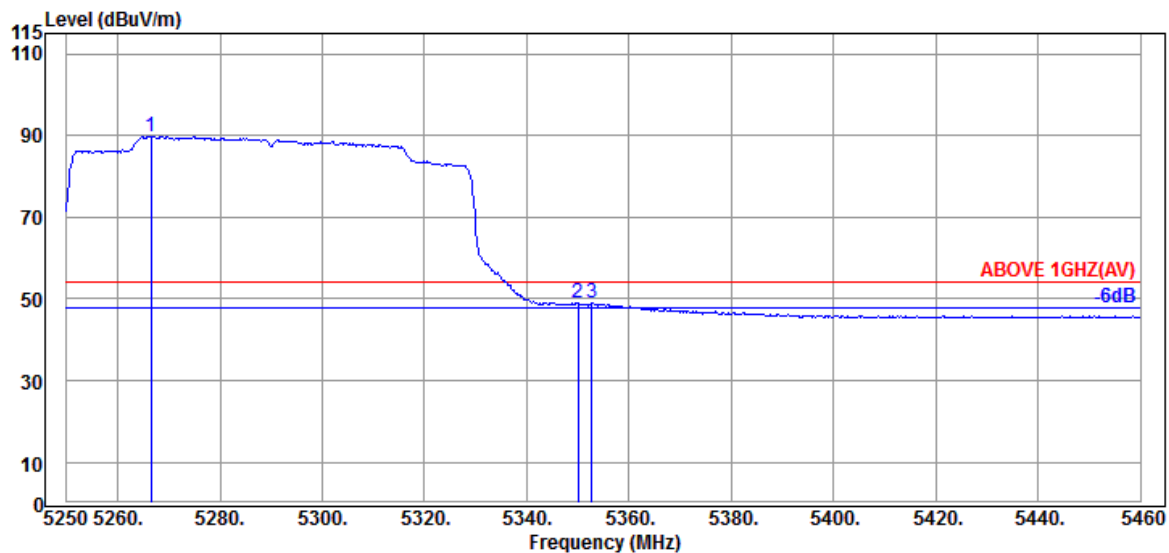

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5266.590	34.43	10.79	34.31	78.78	89.69	---	---	Average
5349.960	34.60	10.83	34.27	37.74	48.90	54.00	5.10	Average
5352.690	34.60	10.83	34.27	37.76	48.92	54.00	5.08	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

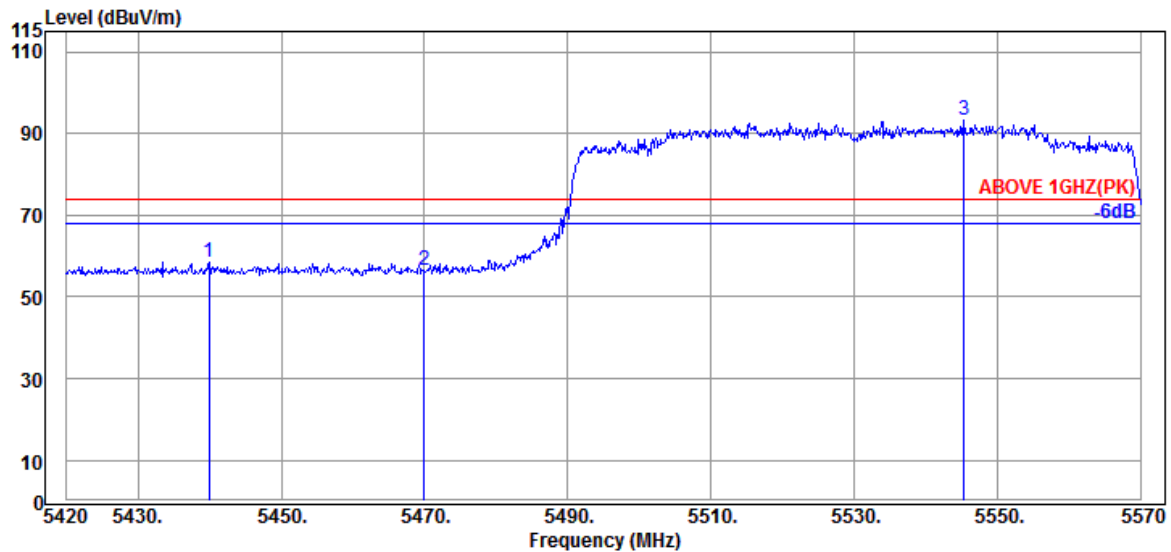

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5439.950	34.55	10.89	34.25	47.22	58.41	74.00	15.59	Peak
5469.950	34.47	10.91	34.24	45.26	56.40	74.00	17.60	Peak
@ 5545.400	34.30	10.95	34.25	82.17	93.17	---	---	Peak

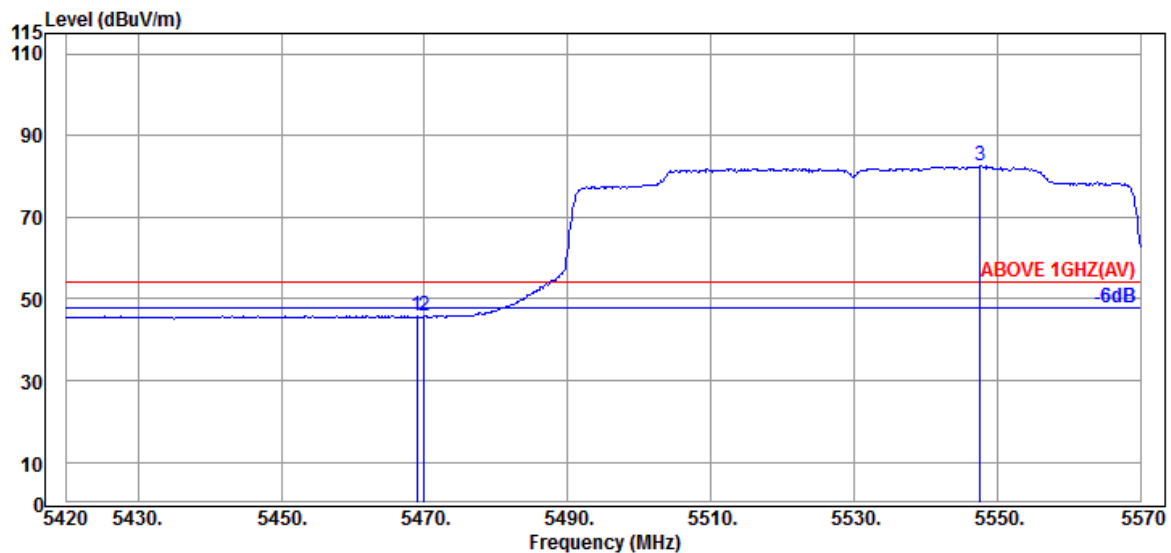

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.47	10.91	34.24	34.68	45.82	54.00	8.18	Average
5469.950	34.47	10.91	34.24	34.52	45.66	54.00	8.34	Average
@ 5547.650	34.30	10.95	34.25	71.51	82.51	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

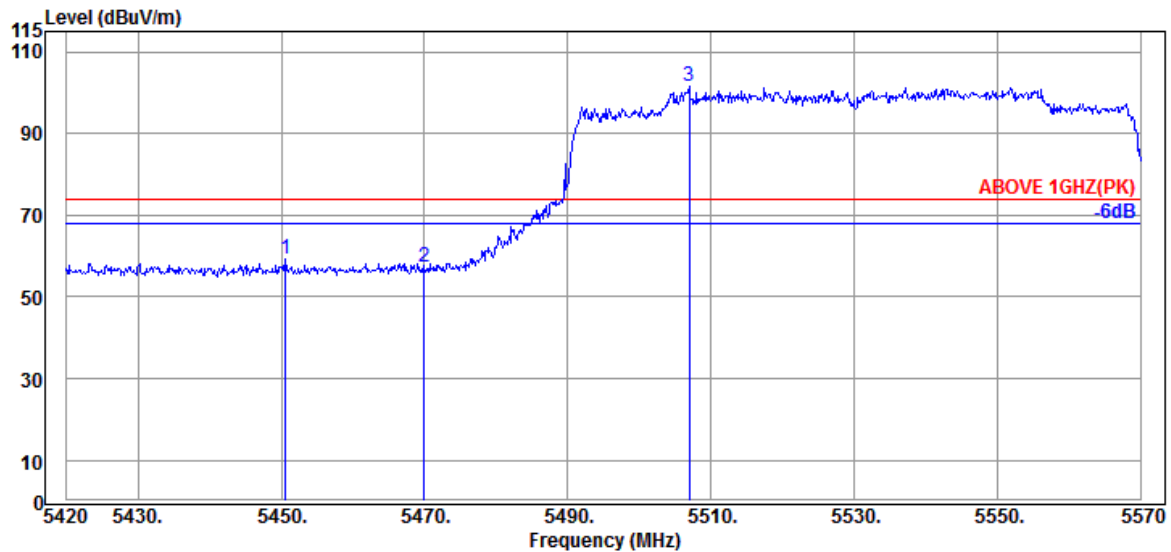

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.600	34.50	10.89	34.24	47.98	59.13	74.00	14.87	Peak
5469.950	34.47	10.91	34.24	46.22	57.36	74.00	16.64	Peak
@ 5507.000	34.40	10.93	34.24	90.53	101.62	---	---	Peak

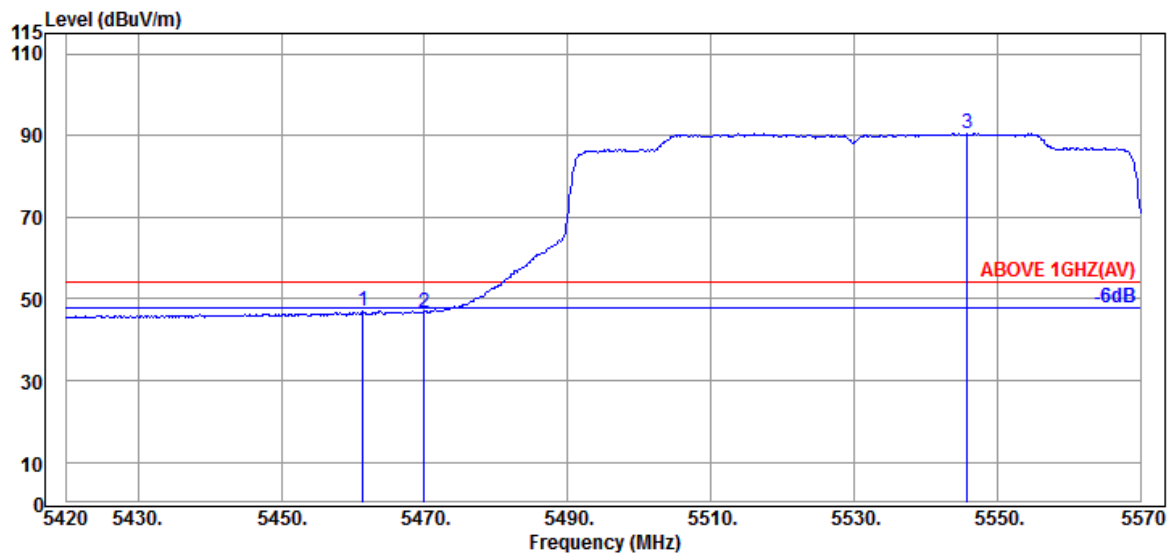

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.400	34.50	10.91	34.24	35.78	46.95	54.00	7.05	Average
5469.950	34.47	10.91	34.24	35.66	46.80	54.00	7.20	Average
@ 5545.850	34.30	10.95	34.25	79.39	90.39	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5610MHz

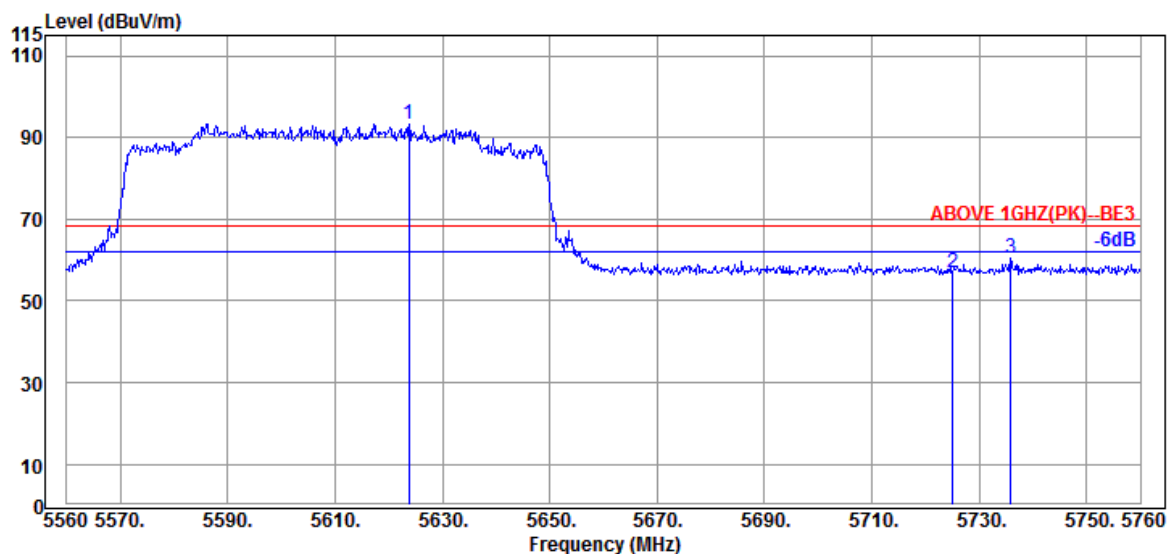

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5623.800	34.40	10.99	34.28	82.35	93.46	---	---	Peak
	5725.000	34.67	11.05	34.32	45.39	56.79	68.20	11.41	Peak
	5735.800	34.67	11.05	34.33	48.90	60.29	68.20	7.91	Peak

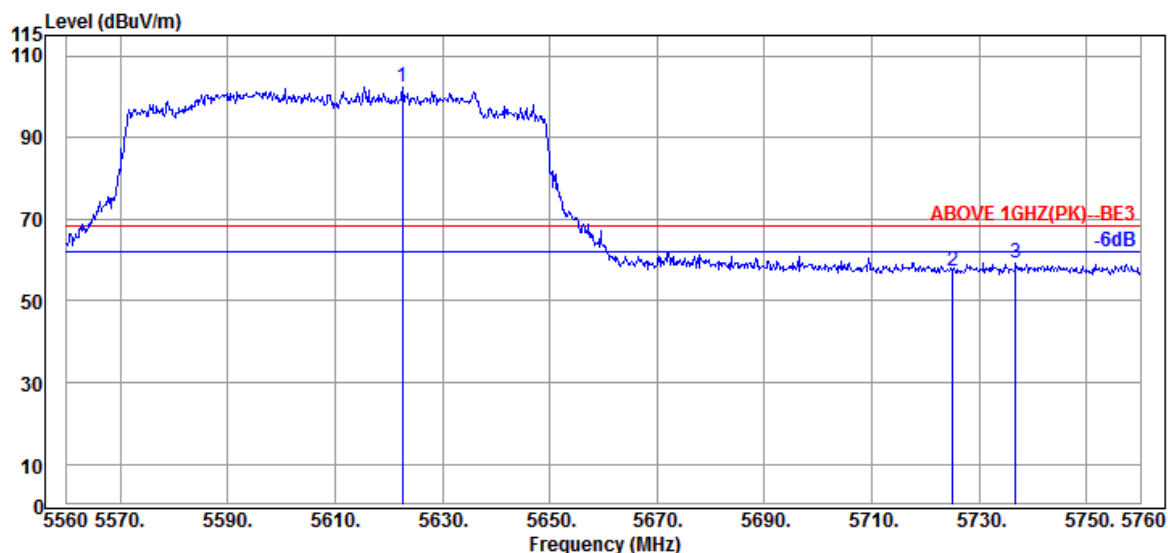

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5622.600	34.40	10.99	34.28	91.33	102.44	---	---	Peak
	5725.000	34.67	11.05	34.32	46.04	57.44	68.20	10.76	Peak
	5736.800	34.67	11.05	34.33	48.04	59.43	68.20	8.77	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

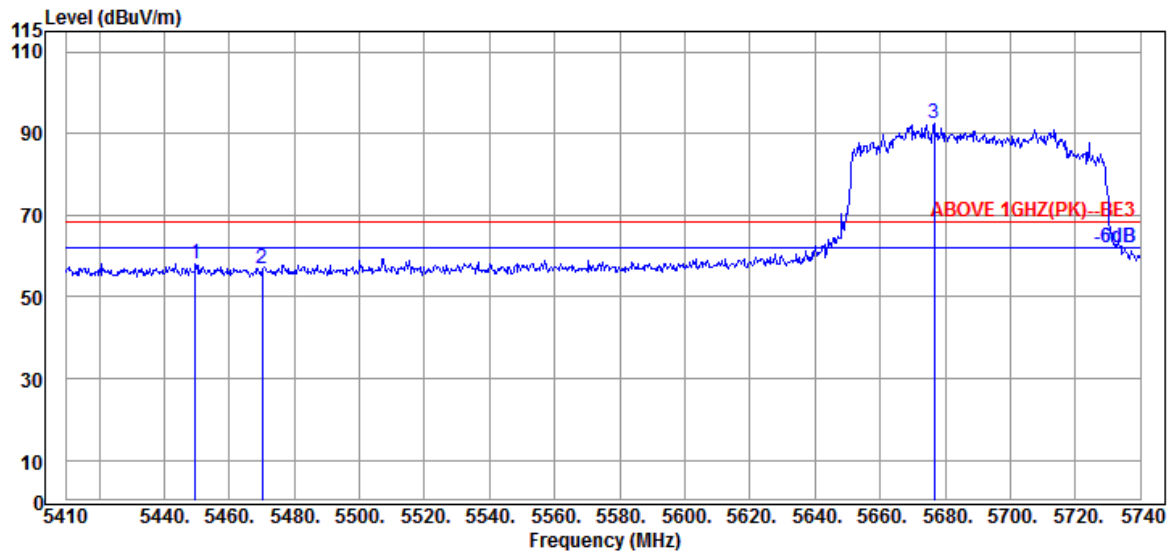

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5449.600	34.50	10.89	34.25	46.93	58.07	68.20	10.13	Peak
5470.060	34.47	10.91	34.24	45.64	56.78	68.20	11.42	Peak
@ 5676.640	34.40	11.03	34.30	81.49	92.62	---	---	Peak

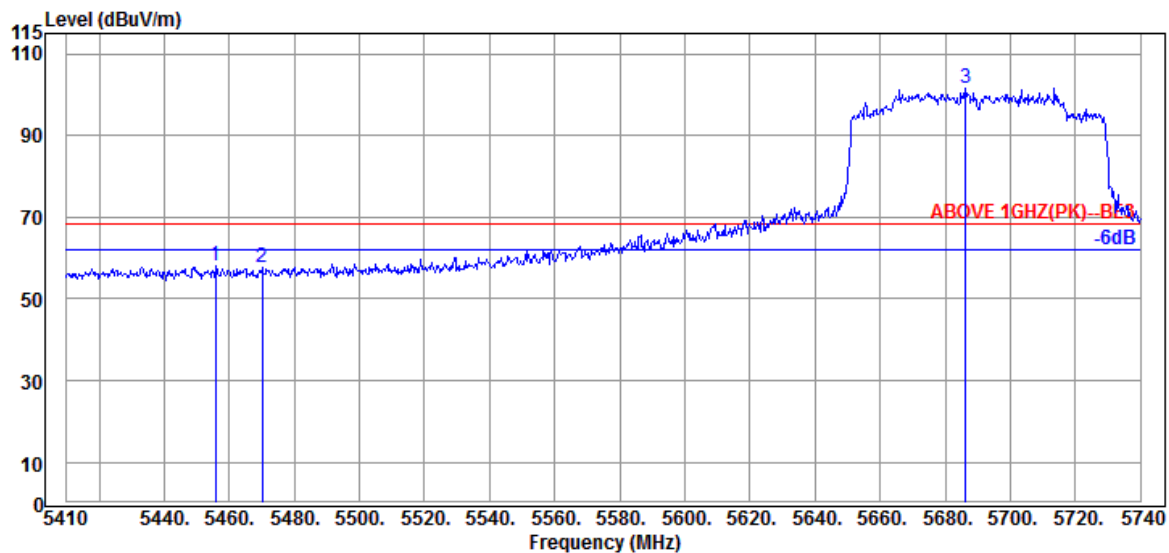

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.870	34.50	10.89	34.24	47.11	58.26	68.20	9.94	Peak
5470.060	34.47	10.91	34.24	46.45	57.59	68.20	10.61	Peak
@ 5686.210	34.40	11.03	34.31	90.53	101.65	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

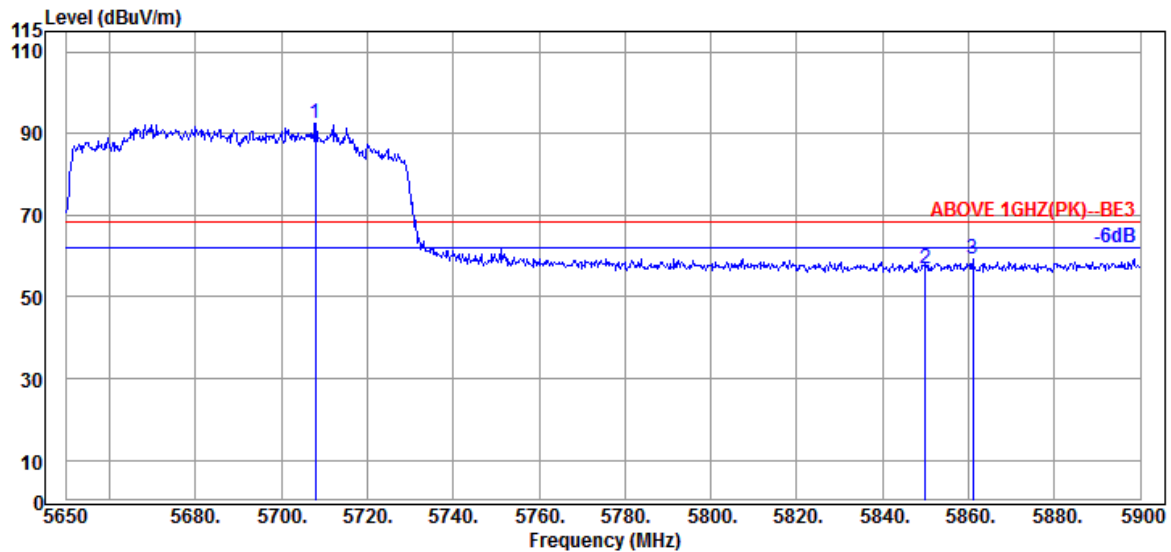

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5708.000	34.53	11.03	34.32	81.12	92.36	---	---	Peak
	5850.000	35.10	11.10	34.38	45.27	57.09	68.20	11.11	Peak
	5861.000	35.20	11.12	34.39	47.25	59.18	68.20	9.02	Peak

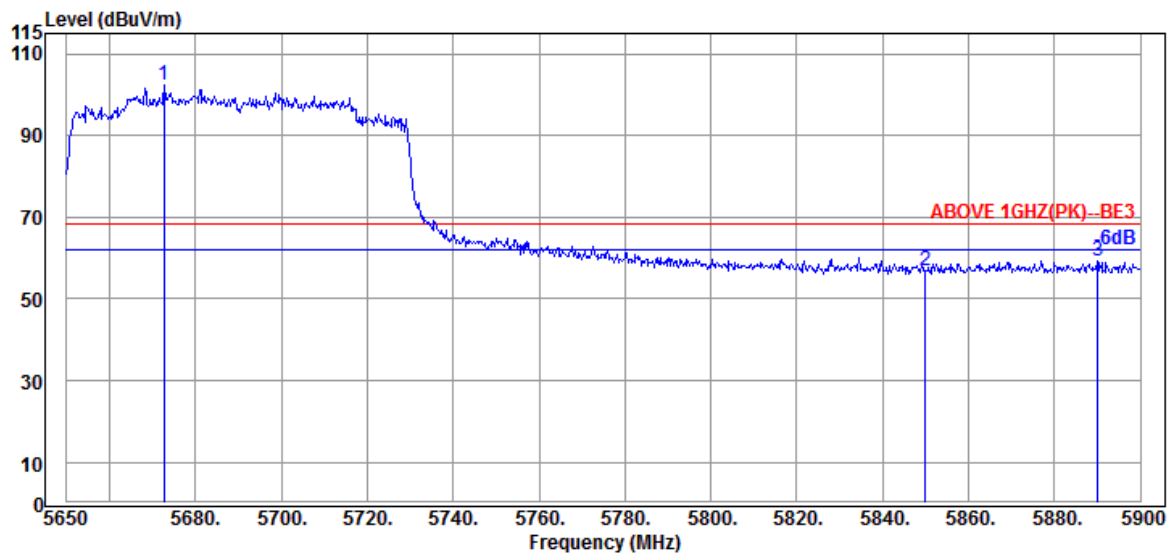

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5672.750	34.40	11.01	34.30	91.24	102.35	---	---	Peak
	5850.000	35.10	11.10	34.38	45.06	56.88	68.20	11.32	Peak
	5890.000	35.40	11.12	34.40	47.17	59.29	68.20	8.91	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-HE80	U-NII Band	III
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

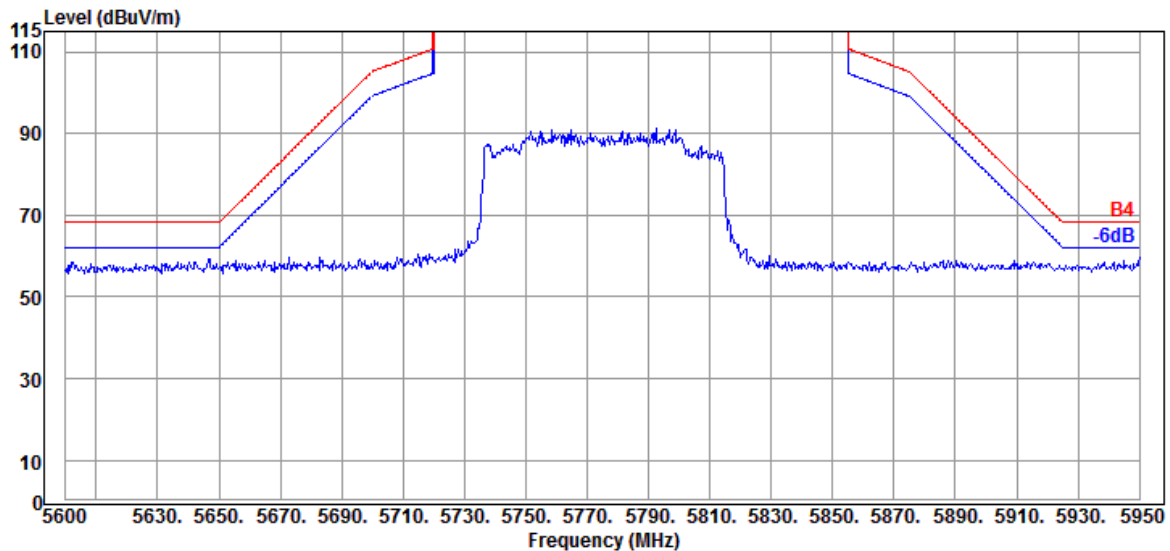

Antenna at Vertical Polarization

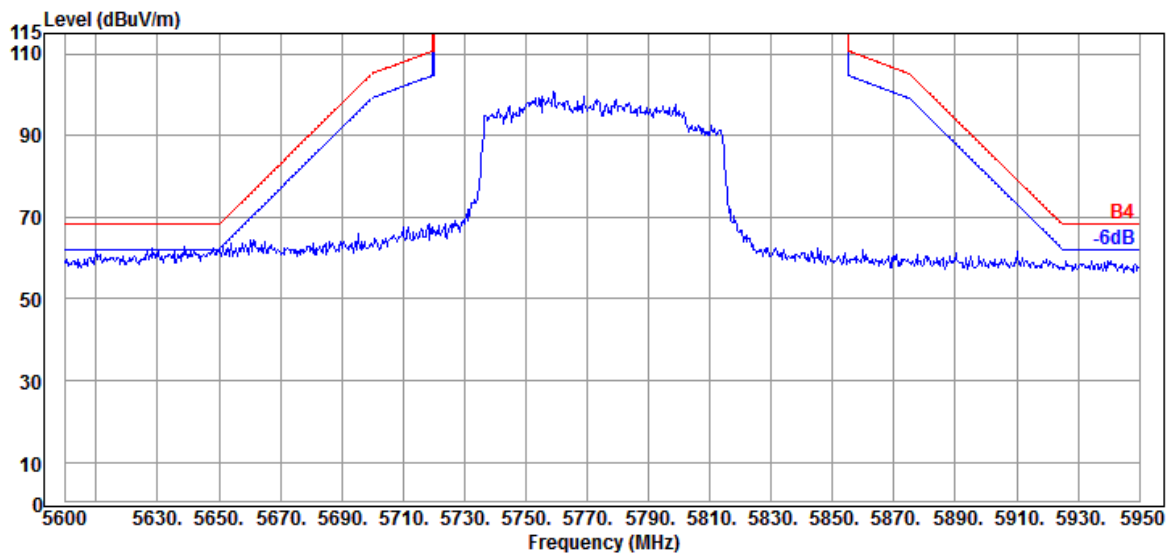

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

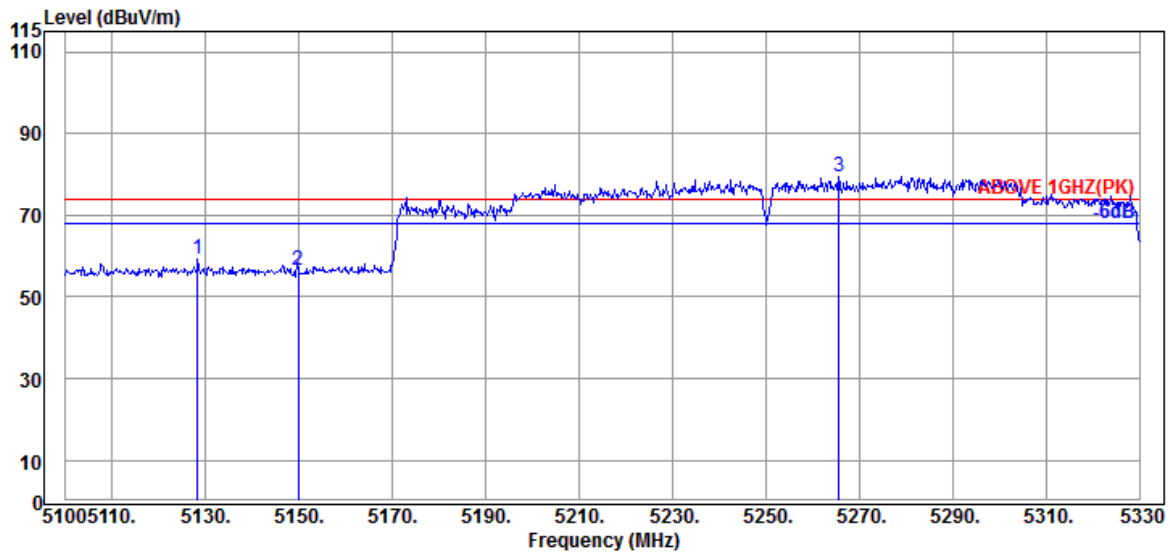

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5128.290	34.17	10.70	34.36	48.60	59.11	74.00	14.89	Peak
5149.910	34.20	10.70	34.35	45.88	56.43	74.00	17.57	Peak
@ 5265.600	34.43	10.79	34.31	68.41	79.32	---	---	Peak

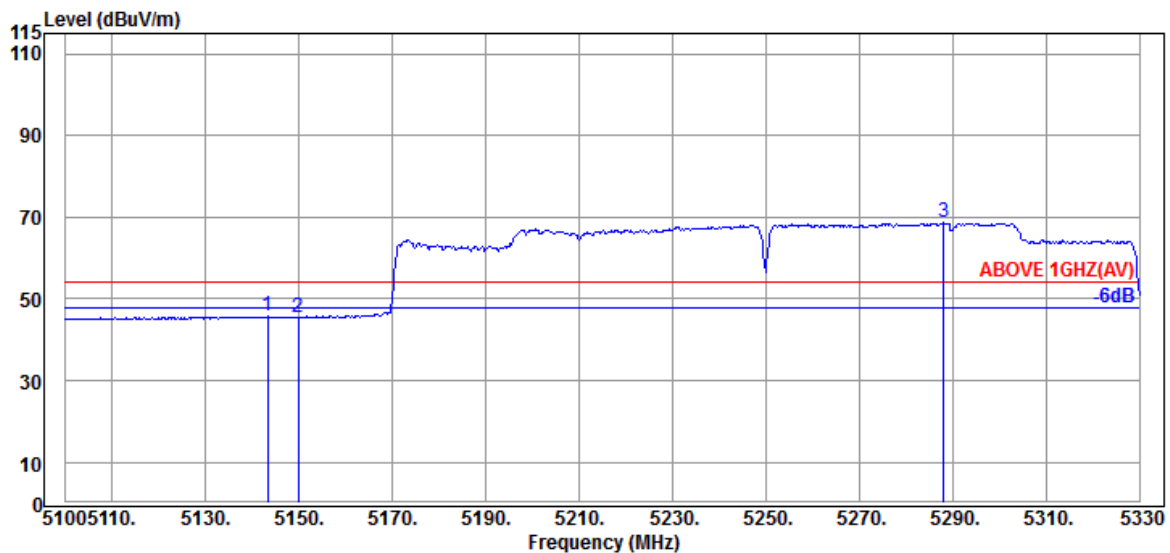

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.240	34.20	10.70	34.36	35.17	45.71	54.00	8.29	Average
5149.910	34.20	10.70	34.35	34.92	45.47	54.00	8.53	Average
@ 5288.140	34.47	10.81	34.30	57.66	68.64	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

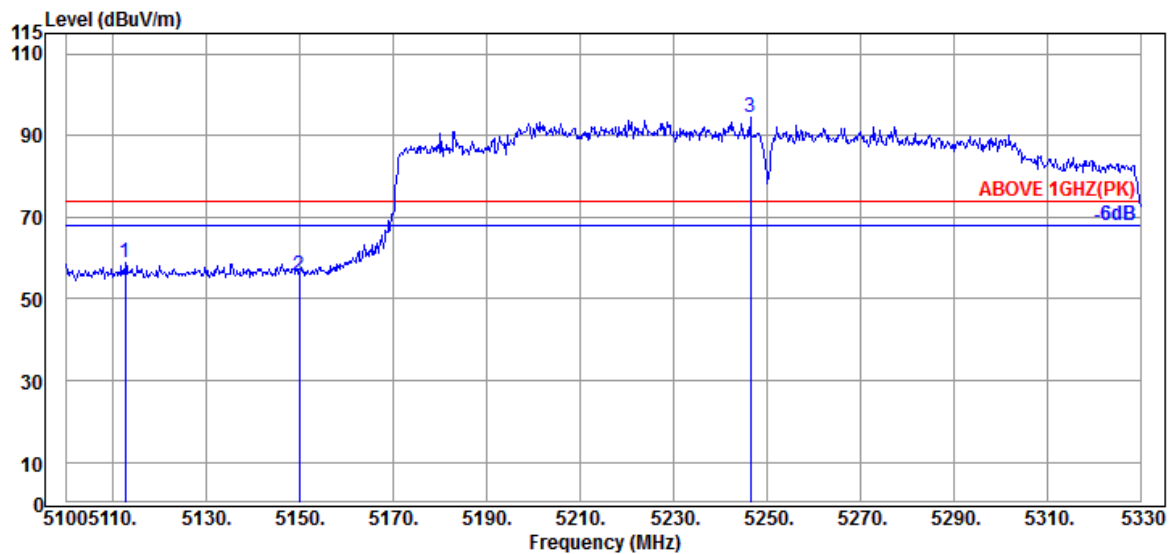

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5112.650	34.13	10.68	34.36	48.27	58.72	74.00	15.28	Peak
5149.910	34.20	10.70	34.35	45.28	55.83	74.00	18.17	Peak
@ 5246.510	34.35	10.76	34.31	83.73	94.53	---	---	Peak

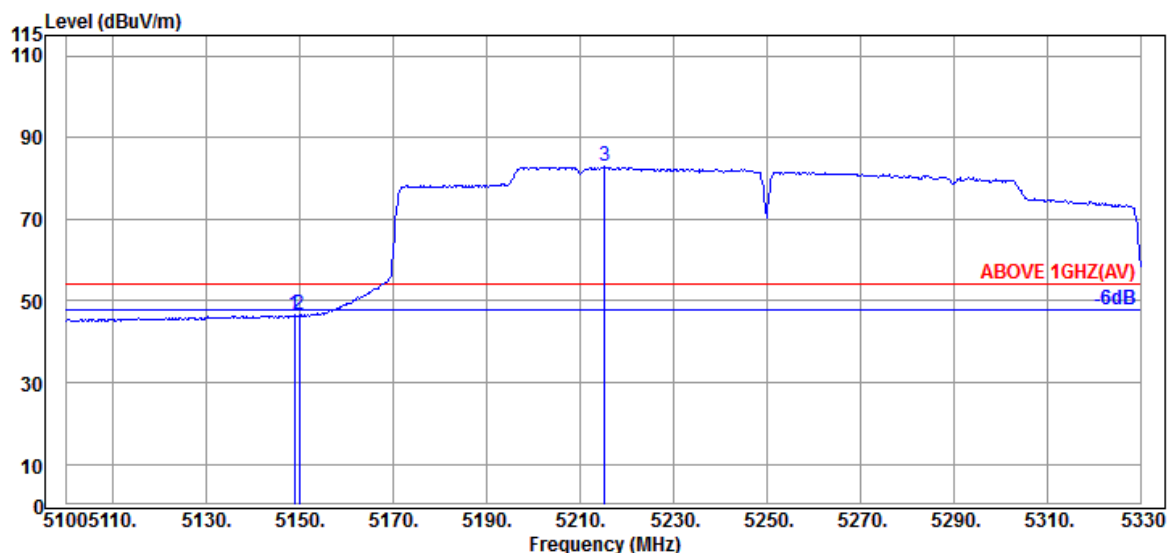

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.760	34.20	10.70	34.35	35.96	46.51	54.00	7.49	Average
5149.910	34.20	10.70	34.35	36.10	46.65	54.00	7.35	Average
@ 5215.230	34.25	10.74	34.33	72.13	82.79	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

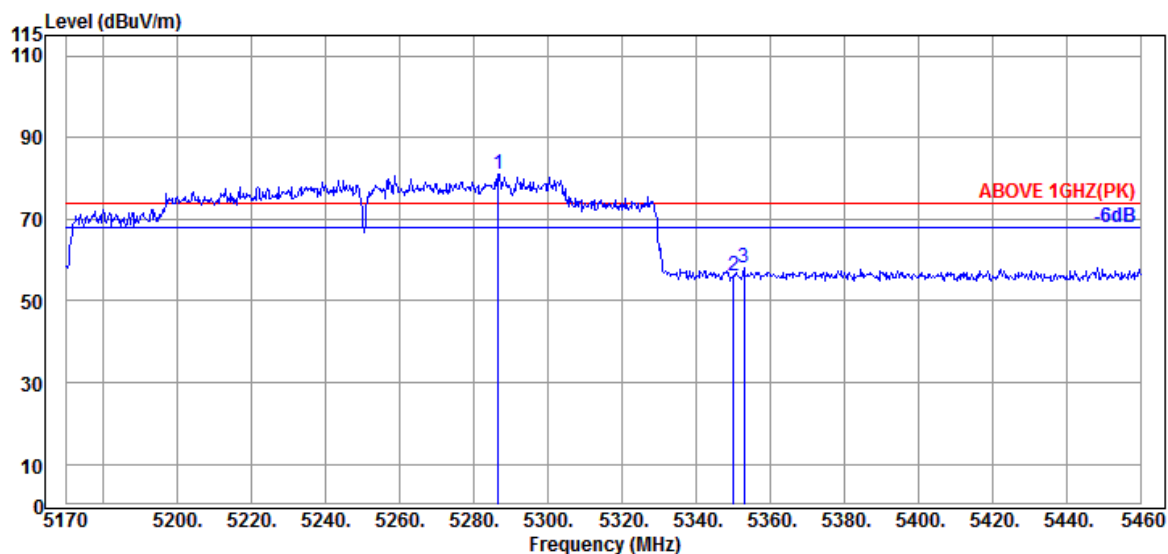

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5286.580	34.47	10.79	34.30	69.97	80.93	---	---	Peak
	5350.090	34.60	10.83	34.27	45.02	56.18	74.00	17.82	Peak
	5352.990	34.60	10.83	34.27	46.91	58.07	74.00	15.93	Peak

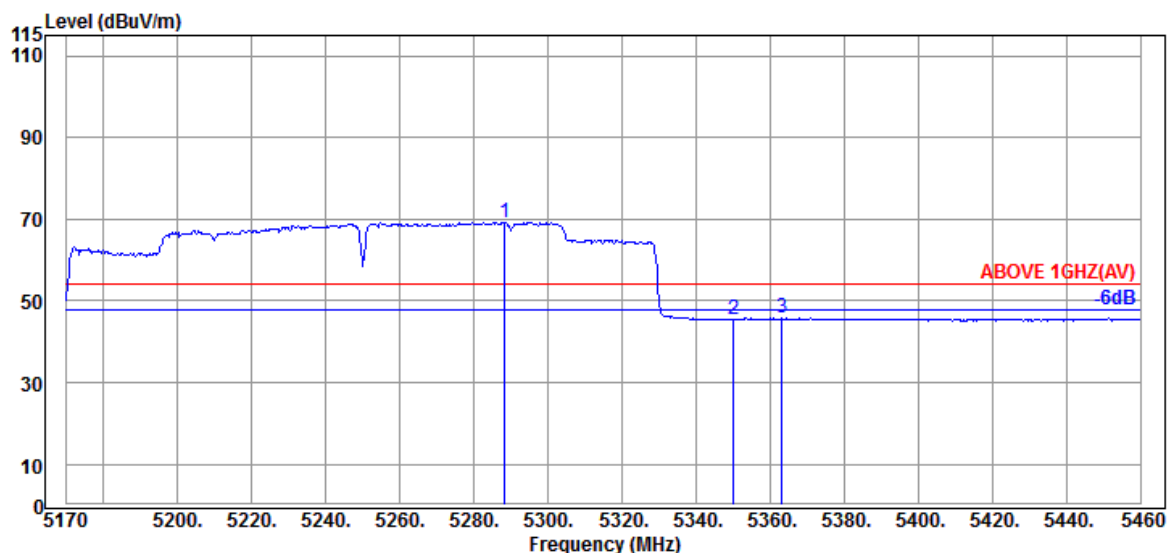

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5288.320	34.47	10.81	34.30	58.36	69.34	---	---	Average
	5350.090	34.60	10.83	34.27	34.27	45.43	54.00	8.57	Average
	5363.140	34.63	10.85	34.27	34.68	45.89	54.00	8.11	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

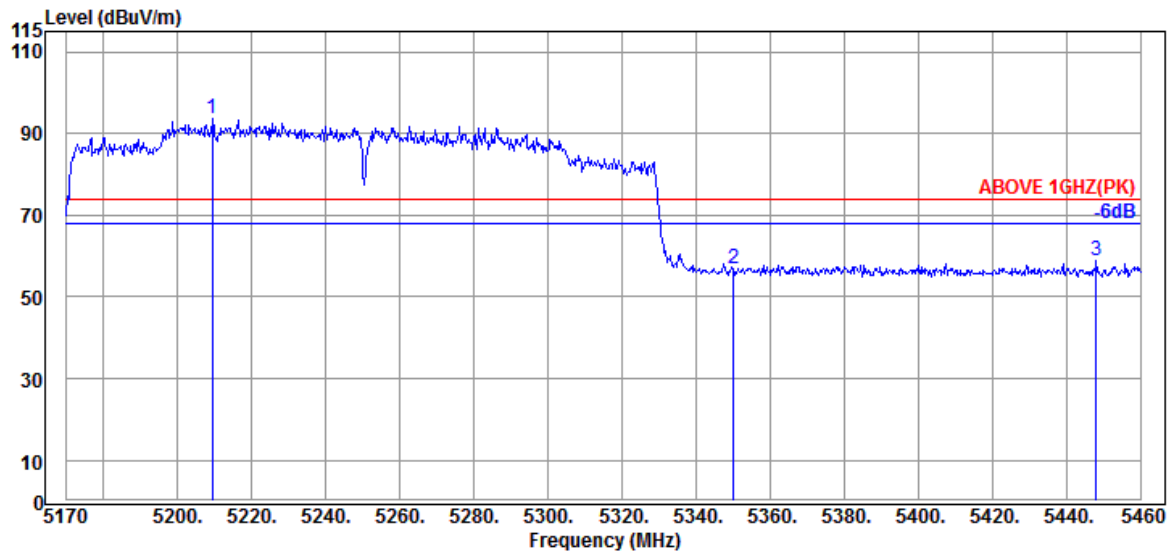

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5209.440	34.25	10.74	34.33	83.10	93.76	---	---	Peak
	5350.090	34.60	10.83	34.27	45.64	56.80	74.00	17.20	Peak
	5448.110	34.50	10.89	34.25	47.56	58.70	74.00	15.30	Peak

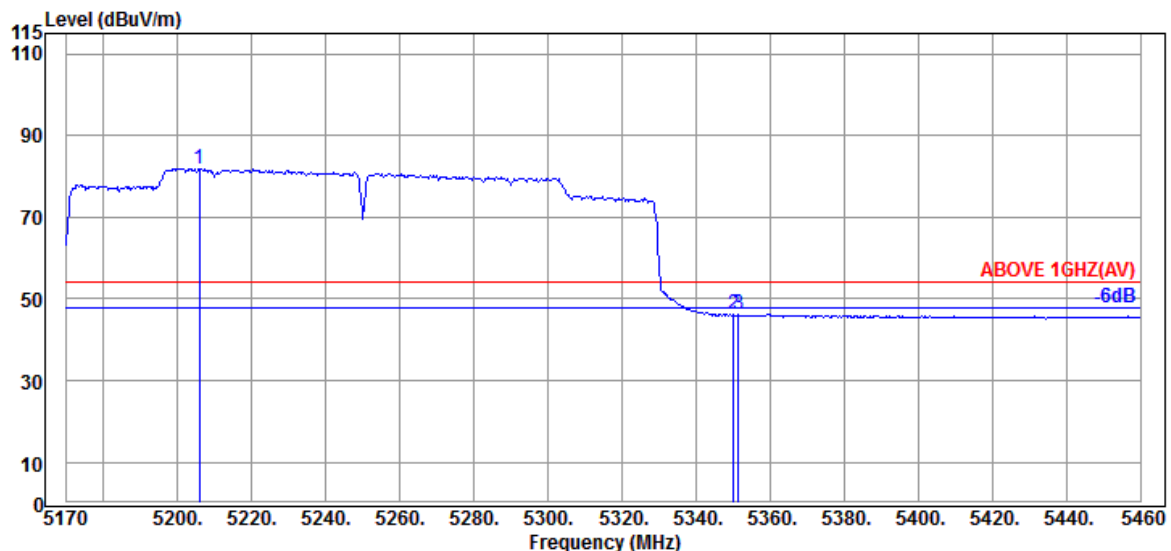

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5205.960	34.25	10.74	34.33	71.19	81.85	---	---	Average
	5350.090	34.60	10.83	34.27	34.91	46.07	54.00	7.93	Average
	5351.540	34.60	10.83	34.27	35.07	46.23	54.00	7.77	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

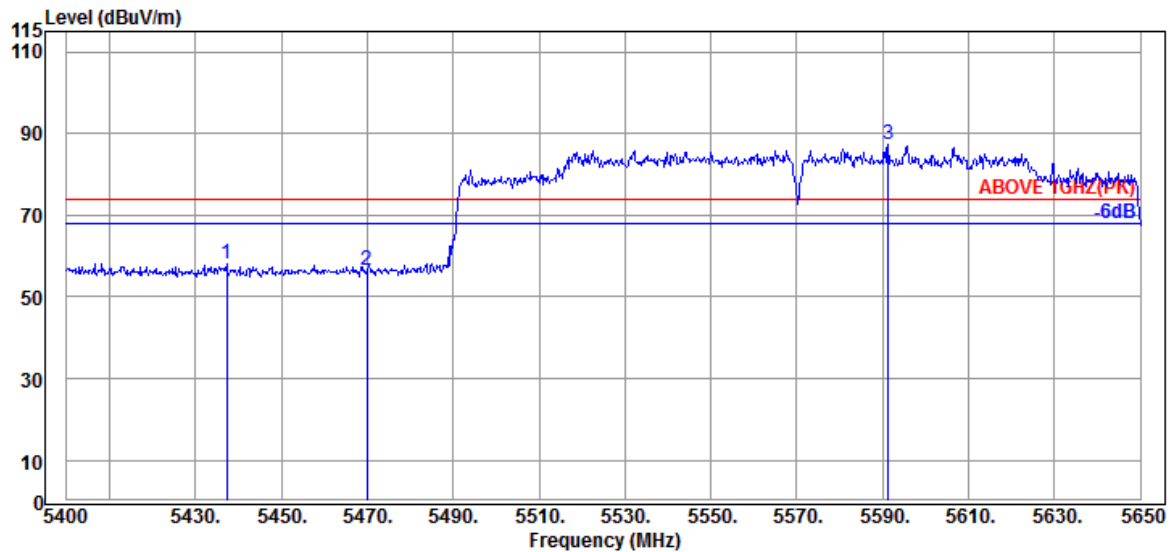

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5437.250	34.55	10.89	34.25	47.04	58.23	74.00	15.77	Peak
5470.000	34.47	10.91	34.24	45.20	56.34	74.00	17.66	Peak
@ 5591.250	34.37	10.97	34.27	76.38	87.45	---	---	Peak

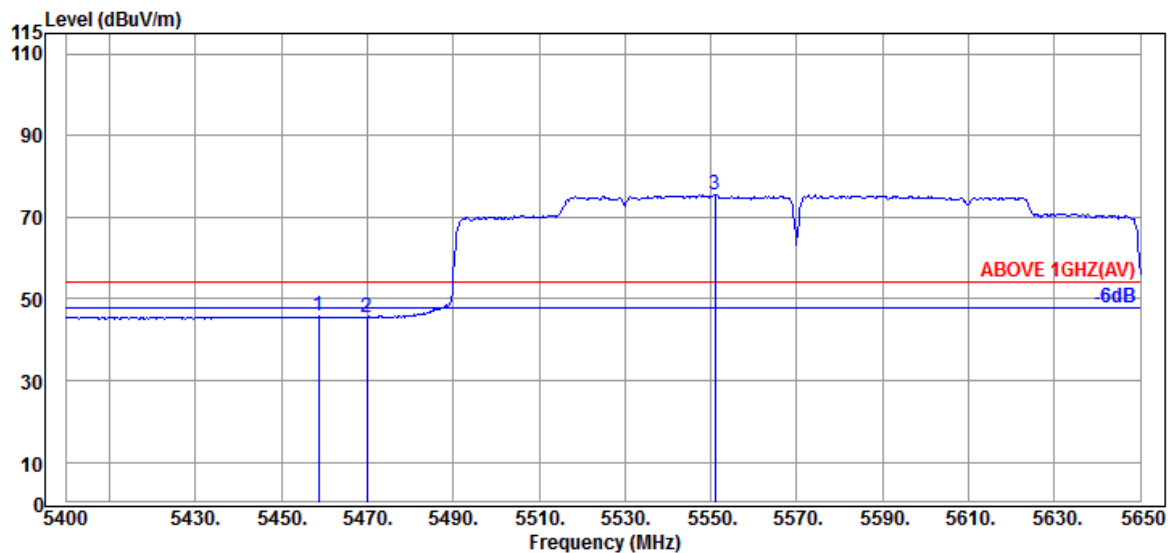

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.750	34.50	10.89	34.24	34.51	45.66	54.00	8.34	Average
5470.000	34.47	10.91	34.24	34.49	45.63	54.00	8.37	Average
@ 5551.000	34.30	10.95	34.25	64.49	75.49	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

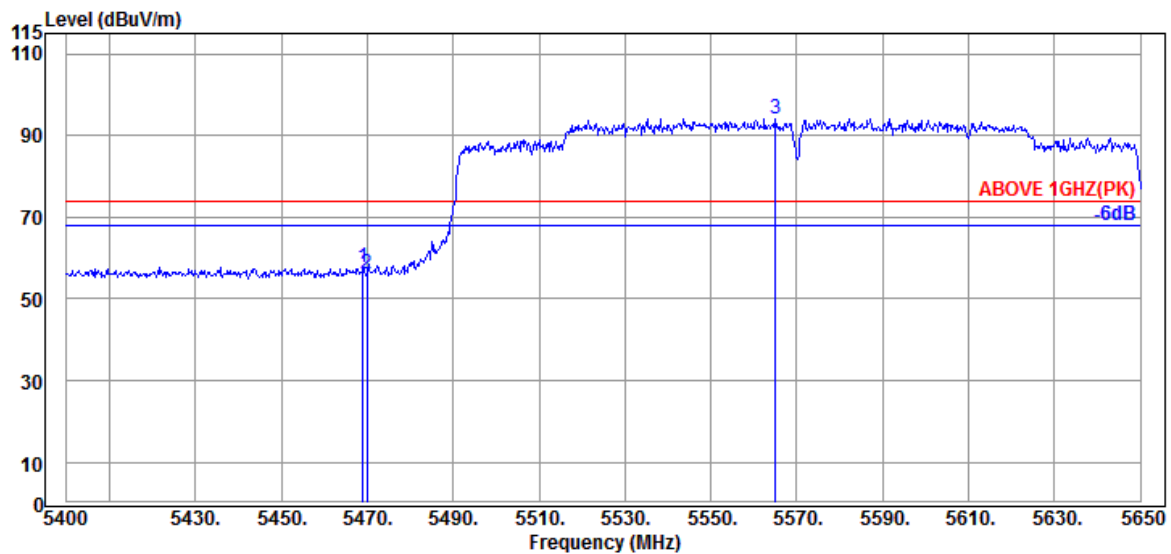

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.47	10.91	34.24	46.56	57.70	74.00	16.30	Peak
5470.000	34.47	10.91	34.24	44.89	56.03	74.00	17.97	Peak
@ 5565.000	34.33	10.95	34.26	83.16	94.18	---	---	Peak

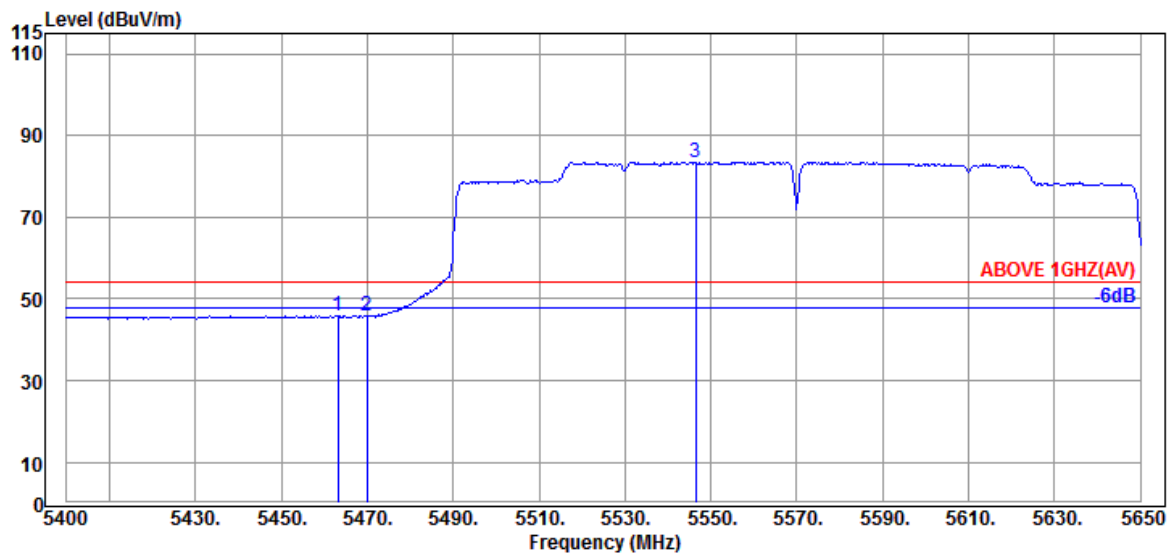

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.250	34.50	10.91	34.24	34.67	45.84	54.00	8.16	Average
5470.000	34.47	10.91	34.24	34.70	45.84	54.00	8.16	Average
@ 5546.500	34.30	10.95	34.25	72.56	83.56	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

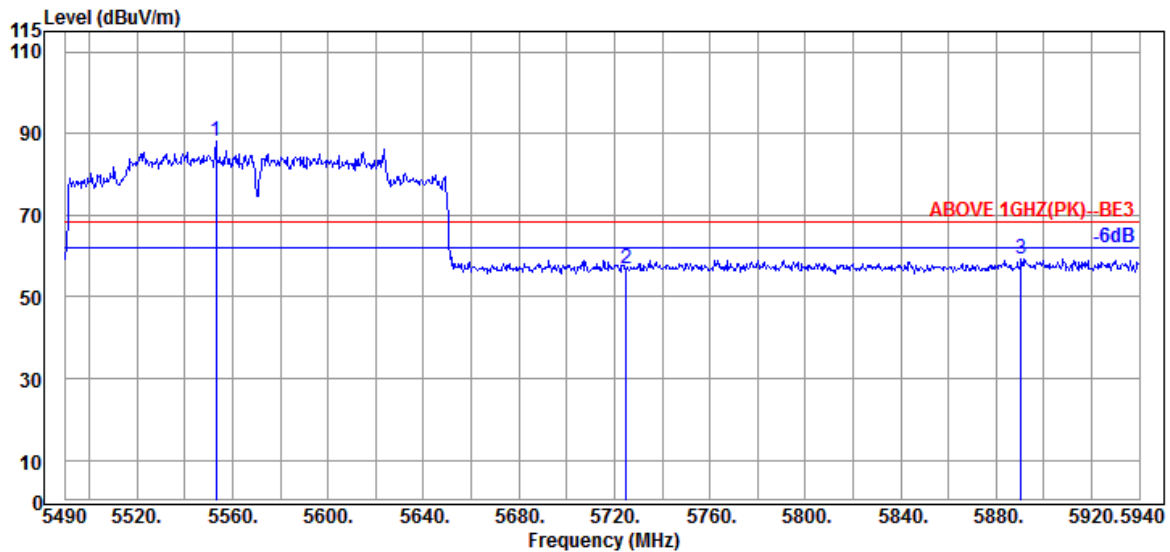

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5553.000	34.30	10.95	34.26	77.26	88.25	---	---	Peak
	5724.900	34.67	11.05	34.32	45.60	57.00	68.20	11.20	Peak
	5890.500	35.40	11.12	34.40	47.20	59.32	68.20	8.88	Peak

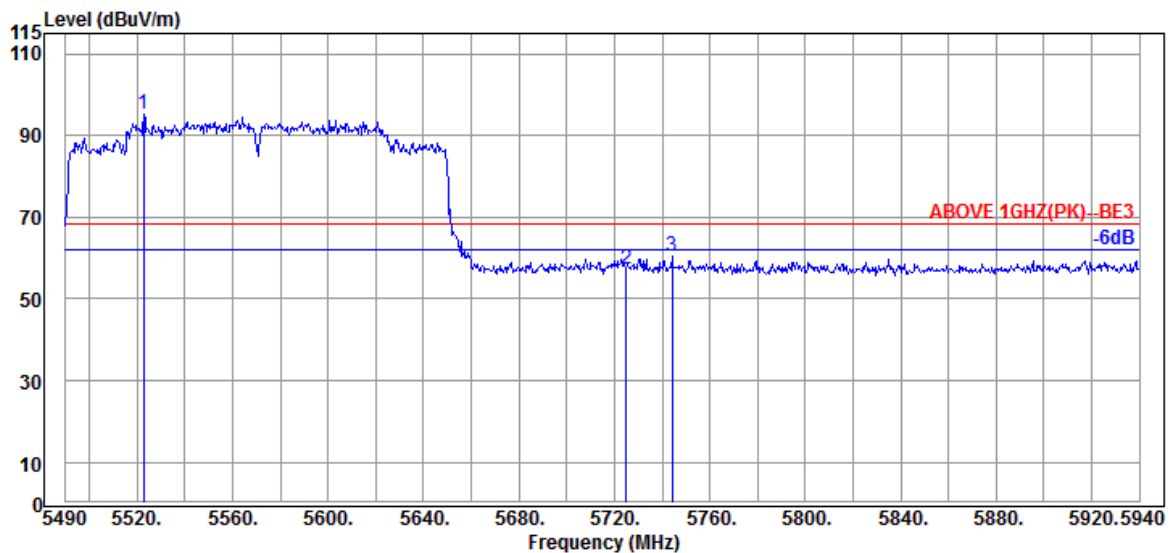

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5522.850	34.37	10.93	34.24	84.12	95.18	---	---	Peak
	5724.900	34.67	11.05	34.32	45.81	57.21	68.20	10.99	Peak
	5744.250	34.80	11.05	34.33	49.10	60.62	68.20	7.58	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	I
RU Configuration	26/0	Frequency	TX 5180MHz

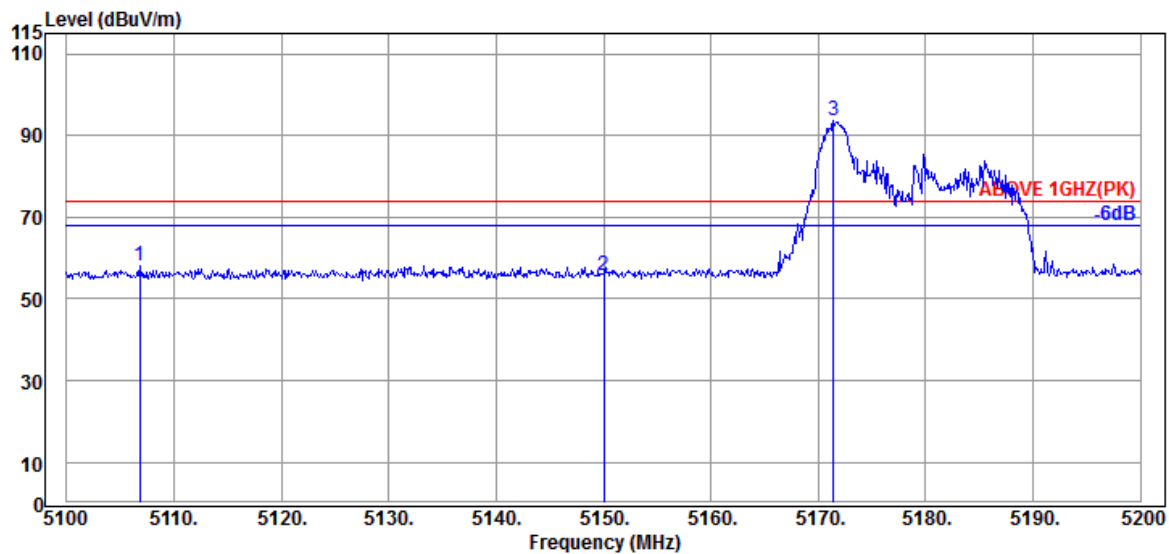

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5106.800	34.10	10.68	34.36	47.79	58.21	74.00	15.79	Peak
5150.000	34.20	10.70	34.35	45.19	55.74	74.00	18.26	Peak
@ 5171.400	34.20	10.72	34.34	83.24	93.82	---	---	Peak

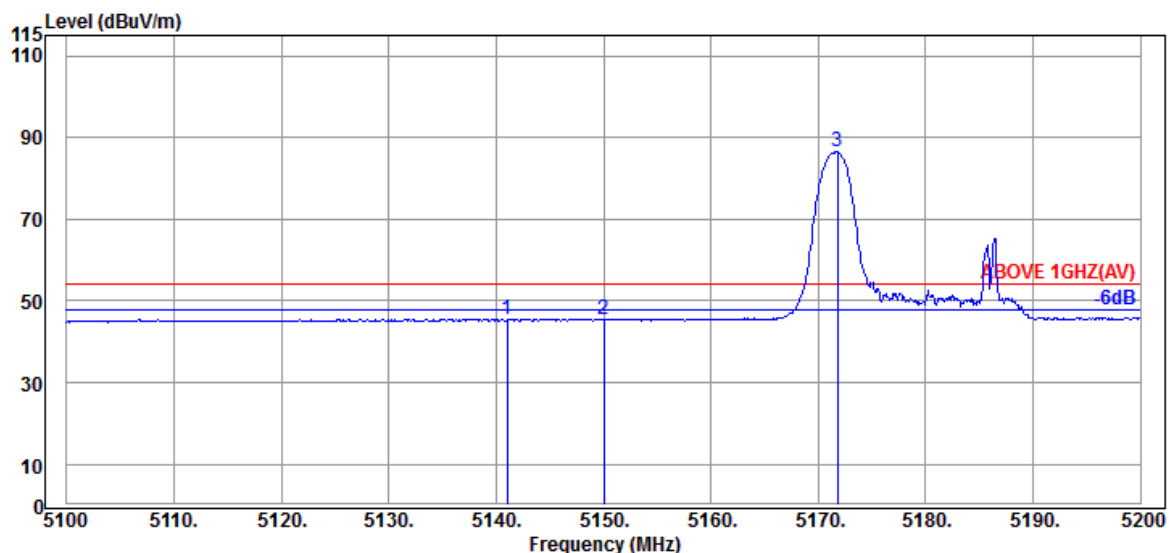

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.000	34.17	10.70	34.36	35.09	45.60	54.00	8.40	Average
5150.000	34.20	10.70	34.35	34.84	45.39	54.00	8.61	Average
@ 5171.800	34.20	10.72	34.34	75.93	86.51	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	I
RU Configuration	26/0	Frequency	TX 5180MHz

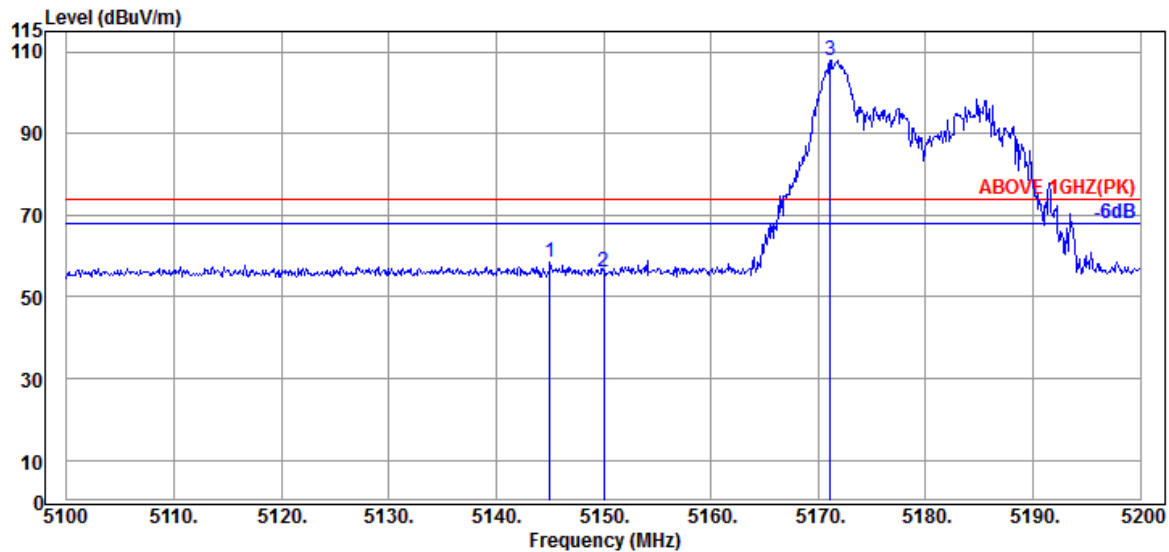

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.000	34.20	10.70	34.35	47.79	58.34	74.00	15.66	Peak
5150.000	34.20	10.70	34.35	45.52	56.07	74.00	17.93	Peak
@ 5171.100	34.20	10.72	34.34	97.38	107.96	---	---	Peak

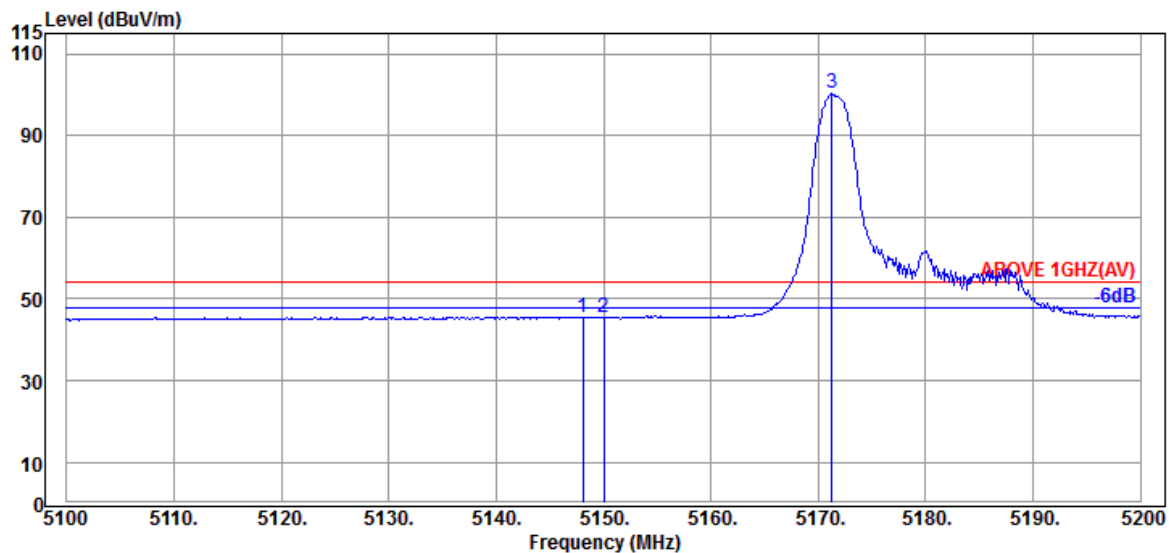

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.100	34.20	10.70	34.35	35.02	45.57	54.00	8.43	Average
5150.000	34.20	10.70	34.35	34.84	45.39	54.00	8.61	Average
@ 5171.300	34.20	10.72	34.34	89.63	100.21	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	I
RU Configuration	52/37	Frequency	TX 5180MHz

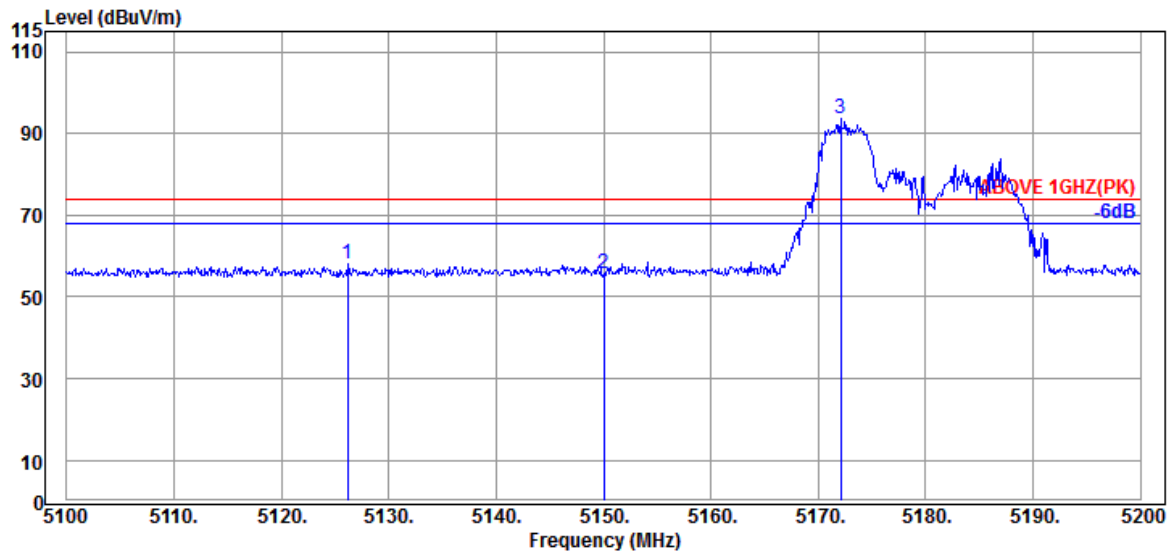

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5126.200	34.13	10.70	34.36	47.72	58.19	74.00	15.81	Peak
5150.000	34.20	10.70	34.35	45.14	55.69	74.00	18.31	Peak
@ 5172.100	34.20	10.72	34.34	83.07	93.65	---	---	Peak

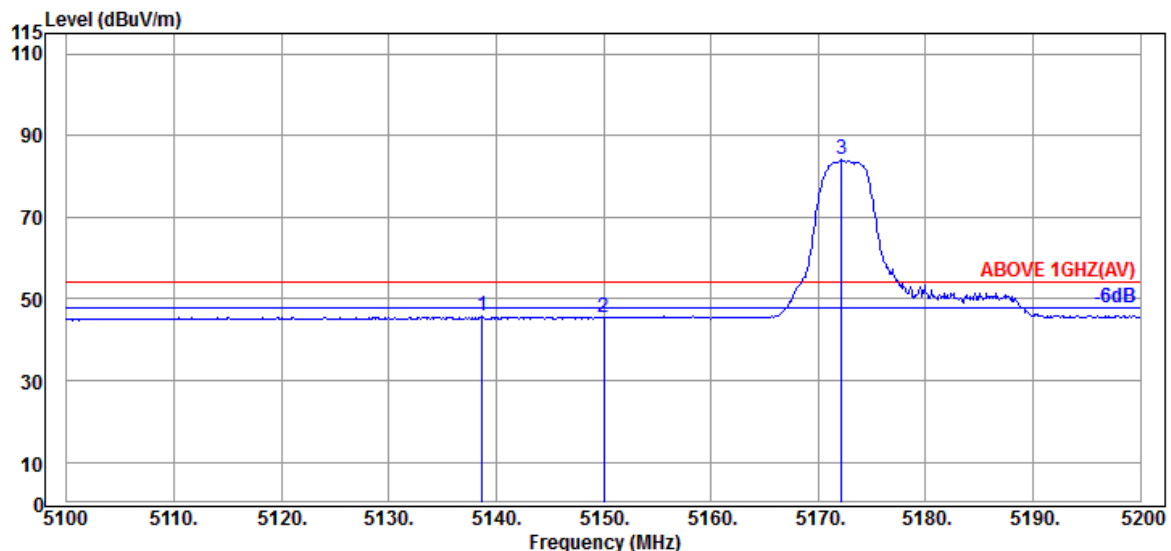

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5138.700	34.17	10.70	34.36	35.15	45.66	54.00	8.34	Average
5150.000	34.20	10.70	34.35	34.71	45.26	54.00	8.74	Average
@ 5172.200	34.20	10.72	34.34	73.56	84.14	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	I
RU Configuration	52/37	Frequency	TX 5180MHz

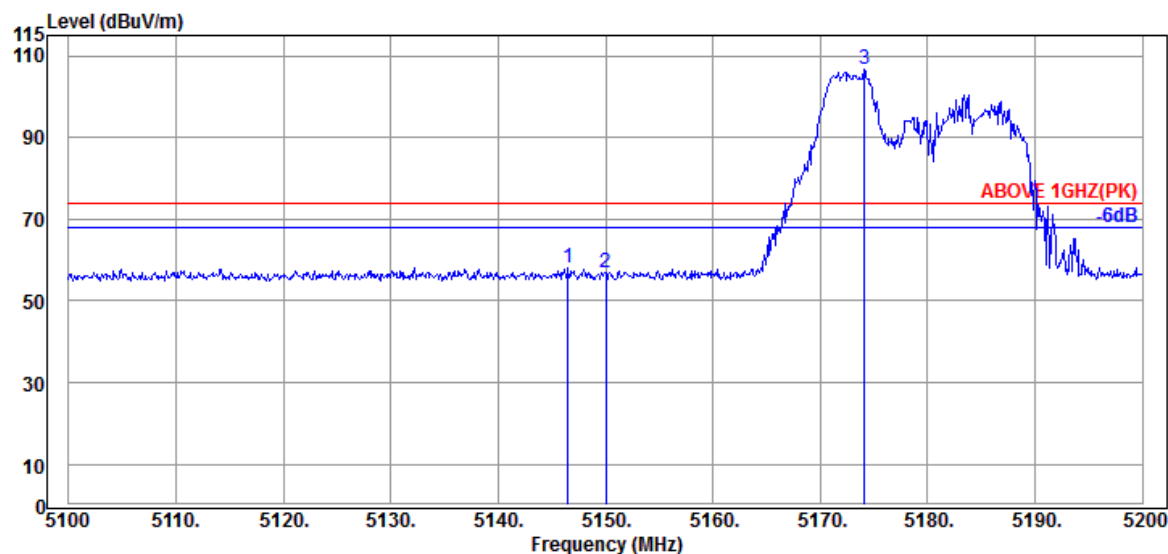

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5146.500	34.20	10.70	34.35	47.56	58.11	74.00	15.89	Peak
5150.000	34.20	10.70	34.35	46.42	56.97	74.00	17.03	Peak
@ 5174.100	34.20	10.72	34.34	96.06	106.64	---	---	Peak

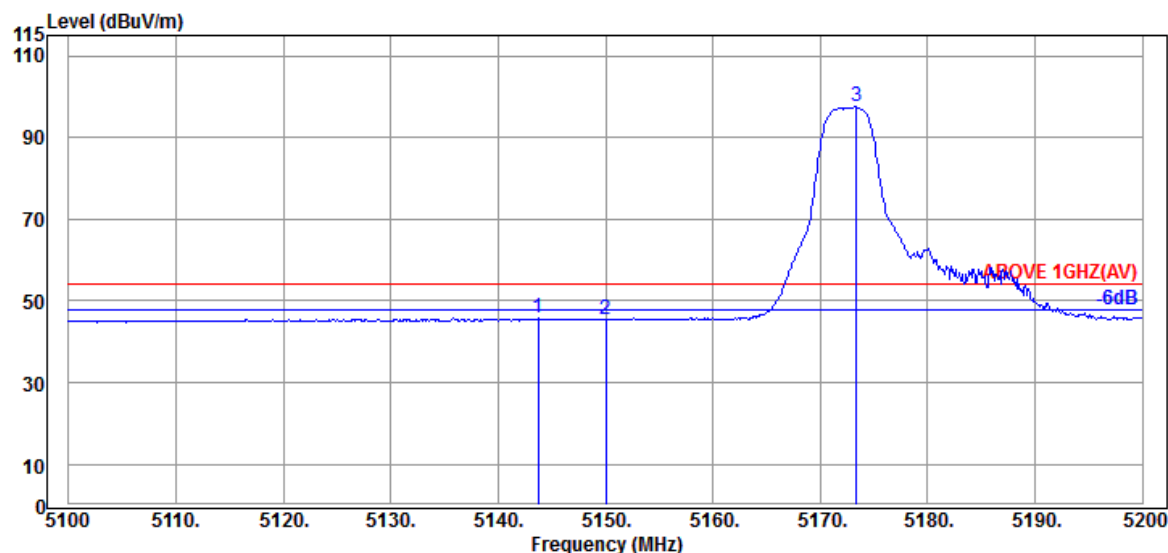

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5143.700	34.20	10.70	34.36	35.15	45.69	54.00	8.31	Average
5150.000	34.20	10.70	34.35	34.89	45.44	54.00	8.56	Average
@ 5173.400	34.20	10.72	34.34	86.92	97.50	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	I
RU Configuration	106/53	Frequency	TX 5180MHz

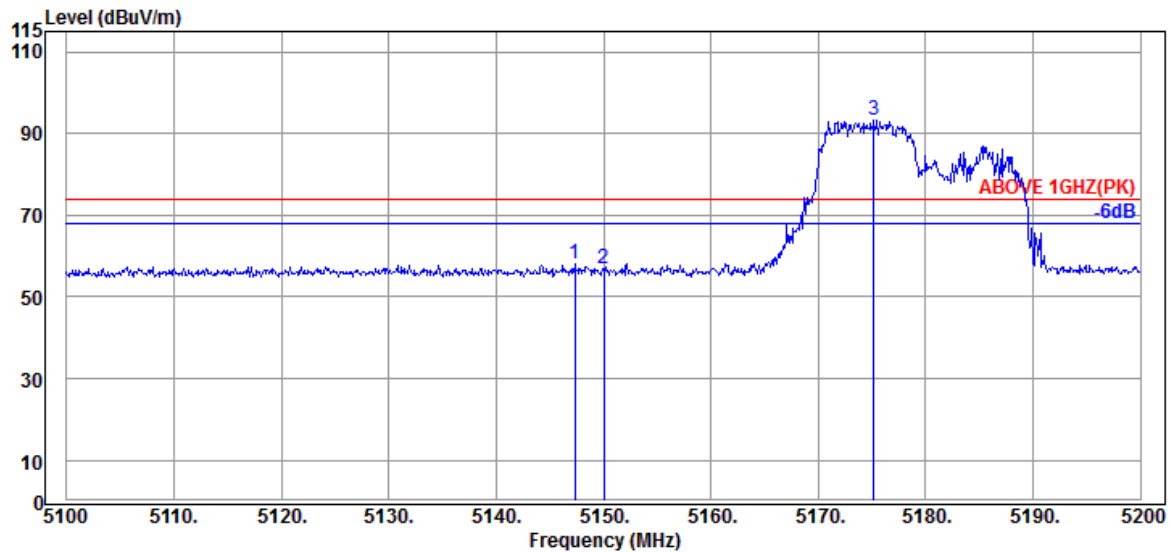

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5147.300	34.20	10.70	34.35	47.49	58.04	74.00	15.96	Peak
5150.000	34.20	10.70	34.35	46.21	56.76	74.00	17.24	Peak
@ 5175.200	34.20	10.72	34.34	82.86	93.44	---	---	Peak

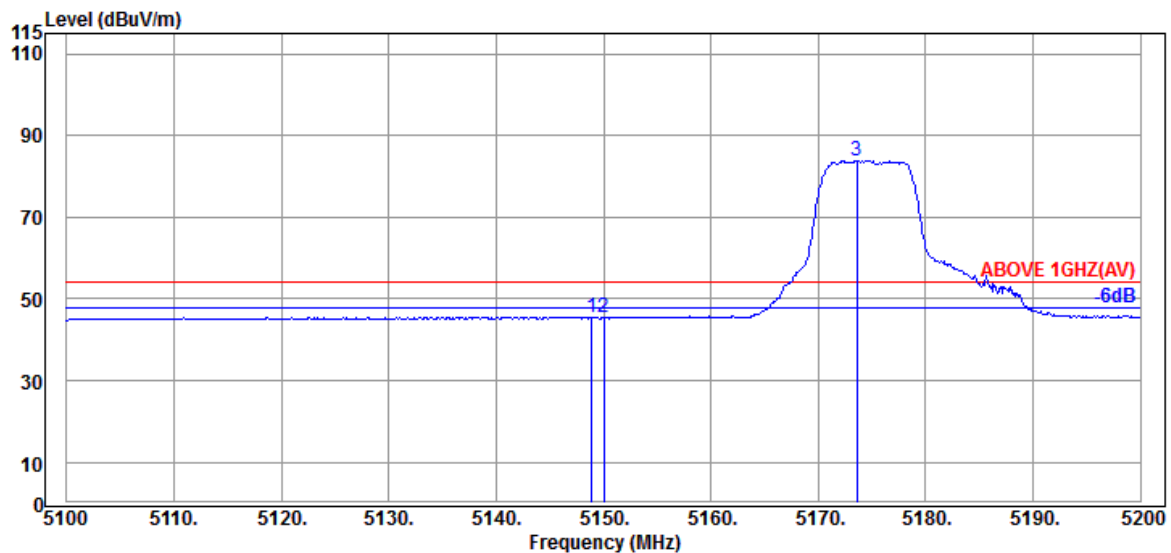

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5148.900	34.20	10.70	34.35	35.01	45.56	54.00	8.44	Average
5150.000	34.20	10.70	34.35	34.73	45.28	54.00	8.72	Average
@ 5173.600	34.20	10.72	34.34	73.23	83.81	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	I
RU Configuration	106/53	Frequency	TX 5180MHz

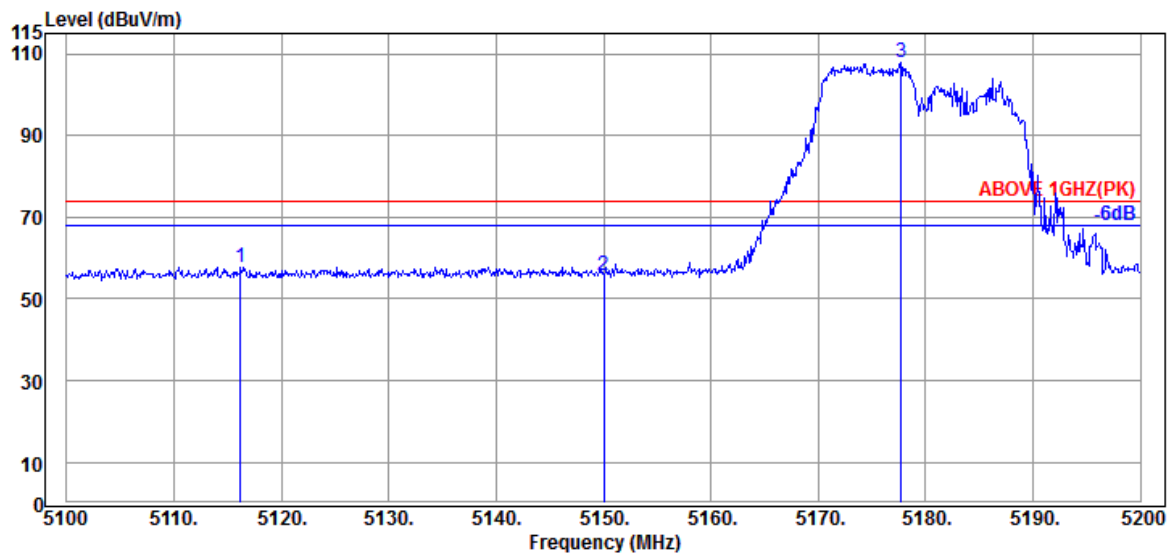

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5116.200	34.13	10.68	34.36	47.44	57.89	74.00	16.11	Peak
5150.000	34.20	10.70	34.35	45.28	55.83	74.00	18.17	Peak
@ 5177.700	34.20	10.72	34.34	97.22	107.80	---	---	Peak

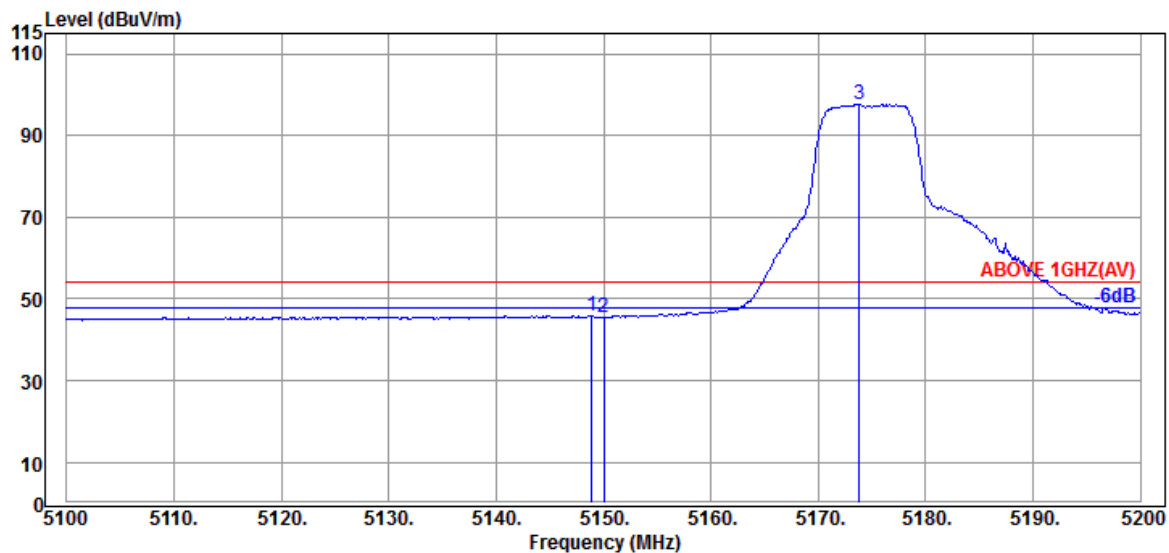

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5148.900	34.20	10.70	34.35	35.26	45.81	54.00	8.19	Average
5150.000	34.20	10.70	34.35	34.92	45.47	54.00	8.53	Average
@ 5173.800	34.20	10.72	34.34	87.13	97.71	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	26/8	Frequency	TX 5320MHz

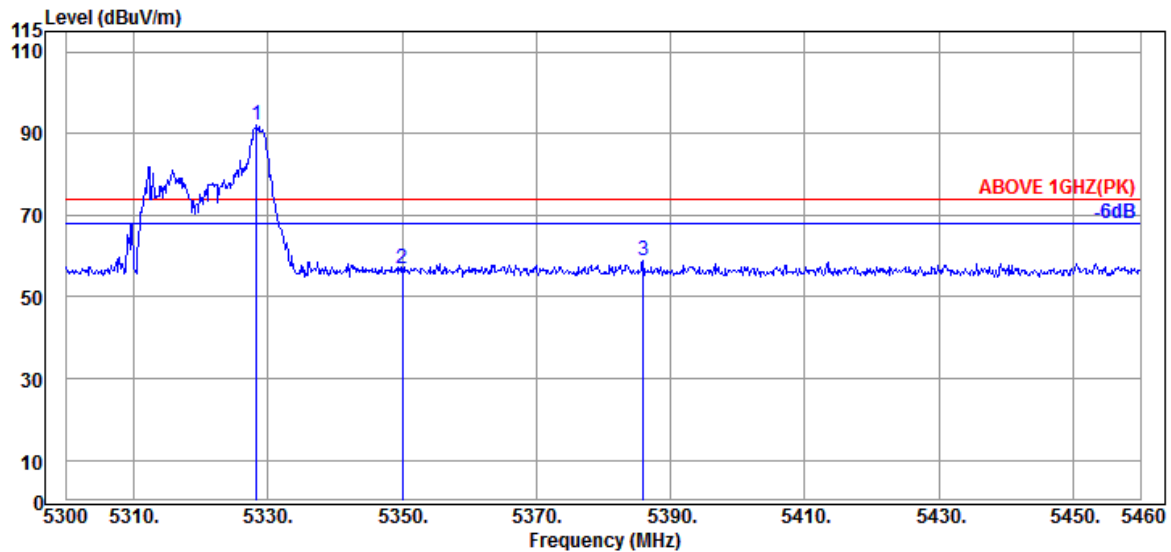

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.320	34.57	10.83	34.28	80.80	91.92	---	---	Peak
5350.080	34.60	10.83	34.27	45.66	56.82	74.00	17.18	Peak
5385.920	34.70	10.85	34.27	47.42	58.70	74.00	15.30	Peak

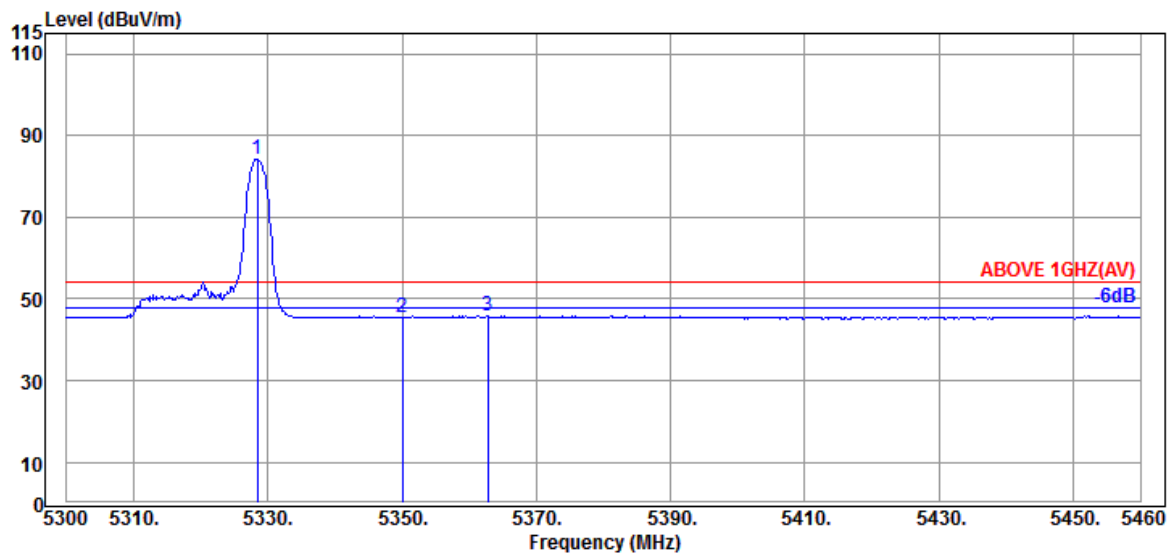

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.480	34.57	10.83	34.28	73.18	84.30	---	---	Average
5350.080	34.60	10.83	34.27	34.26	45.42	54.00	8.58	Average
5362.720	34.63	10.85	34.27	34.64	45.85	54.00	8.15	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	26/8	Frequency	TX 5320MHz

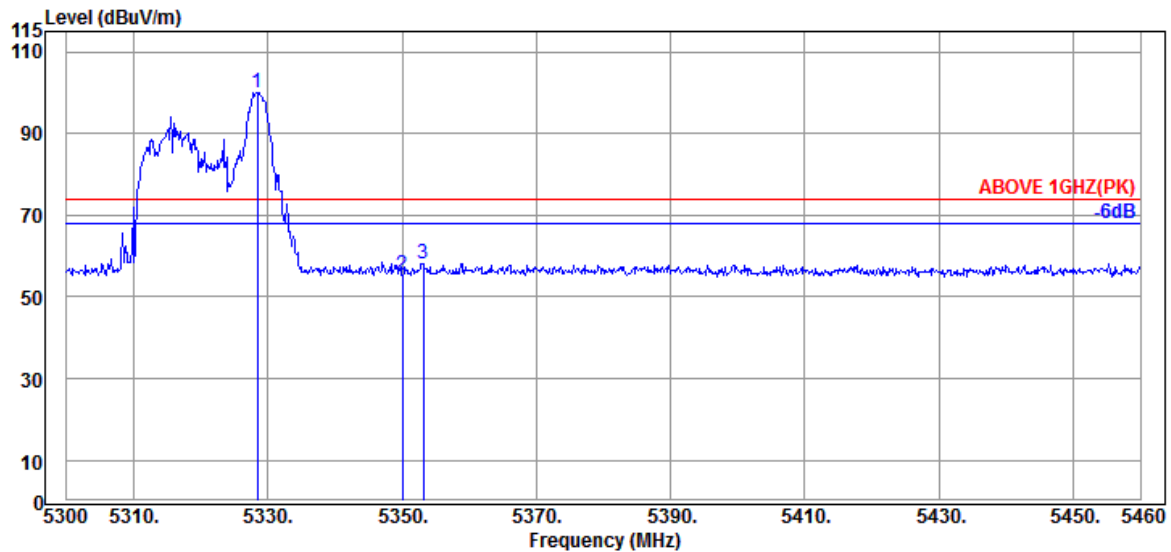

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.480	34.57	10.83	34.28	88.91	100.03	---	---	Peak
5350.080	34.60	10.83	34.27	44.35	55.51	74.00	18.49	Peak
5353.120	34.60	10.83	34.27	46.98	58.14	74.00	15.86	Peak

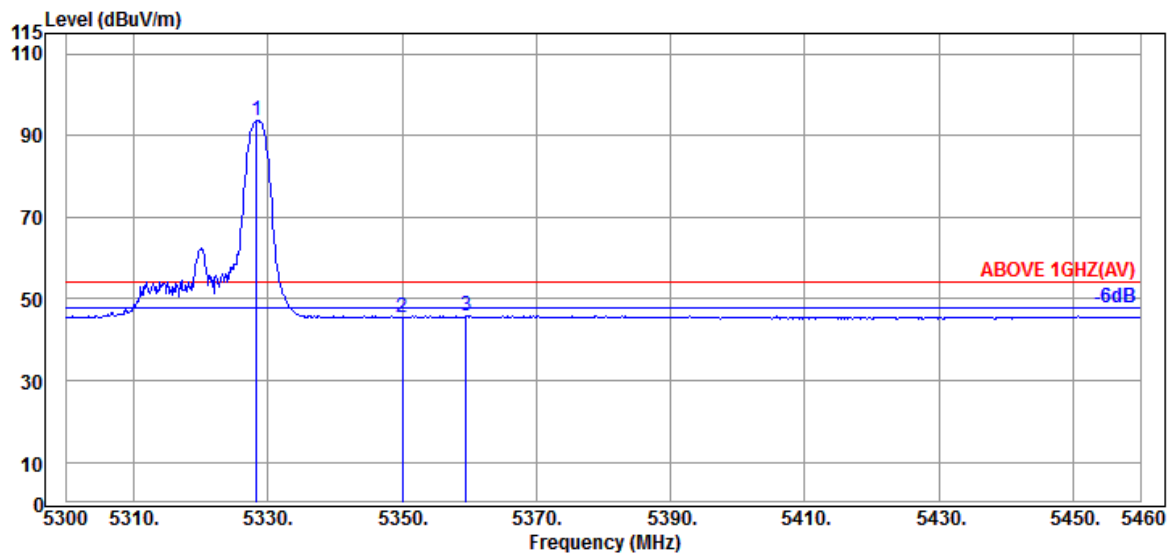

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.320	34.57	10.83	34.28	82.67	93.79	---	---	Average
5350.080	34.60	10.83	34.27	34.46	45.62	54.00	8.38	Average
5359.520	34.63	10.85	34.27	34.63	45.84	54.00	8.16	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	52/40	Frequency	TX 5320MHz

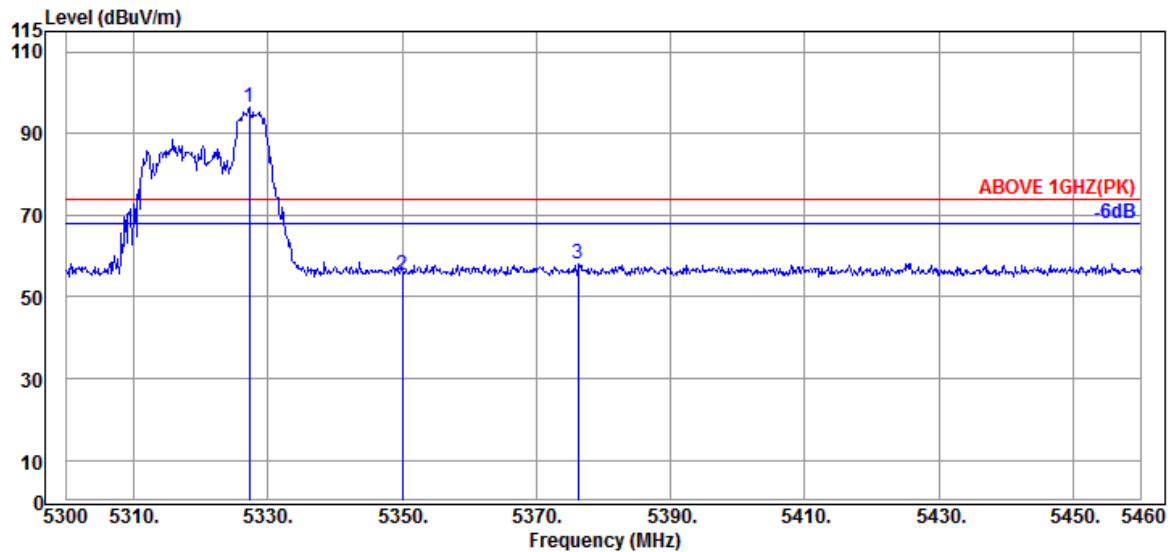

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.200	34.57	10.83	34.28	85.21	96.33	---	---	Peak
5350.080	34.60	10.83	34.27	44.29	55.45	74.00	18.55	Peak
5376.160	34.67	10.85	34.27	46.94	58.19	74.00	15.81	Peak

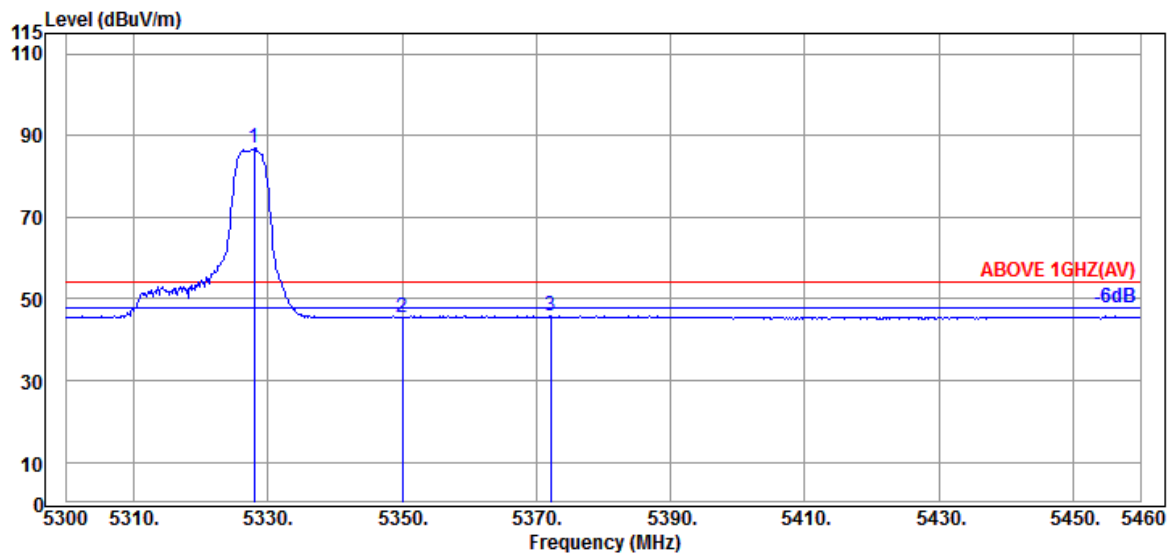

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.000	34.57	10.83	34.28	75.94	87.06	---	---	Average
5350.080	34.60	10.83	34.27	34.33	45.49	54.00	8.51	Average
5372.160	34.67	10.85	34.27	34.62	45.87	54.00	8.13	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	52/40	Frequency	TX 5320MHz

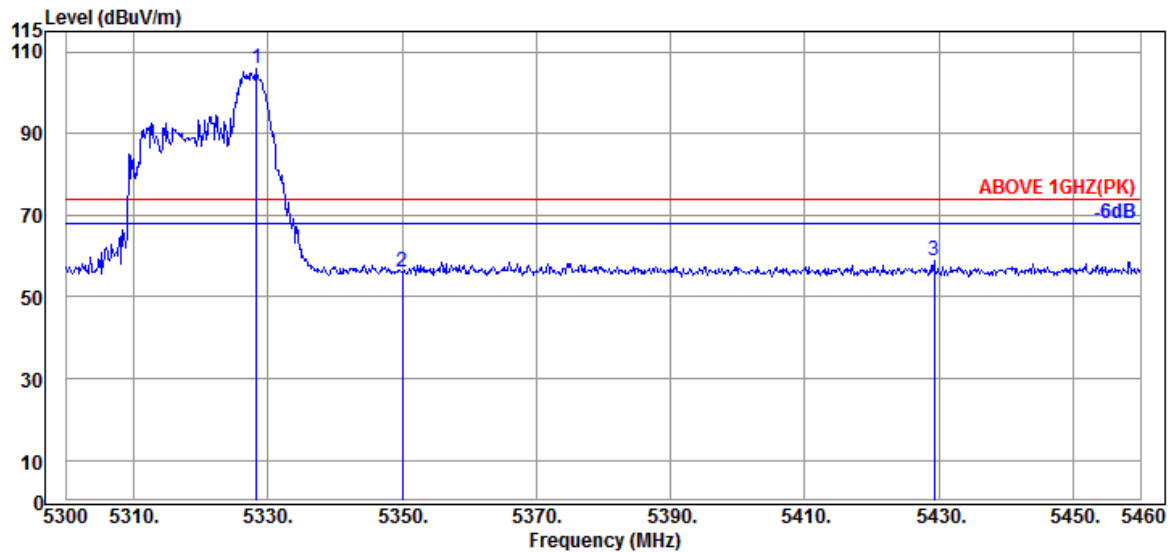

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.320	34.57	10.83	34.28	94.86	105.98	---	---	Peak
5350.080	34.60	10.83	34.27	45.07	56.23	74.00	17.77	Peak
5429.280	34.60	10.89	34.25	47.71	58.95	74.00	15.05	Peak

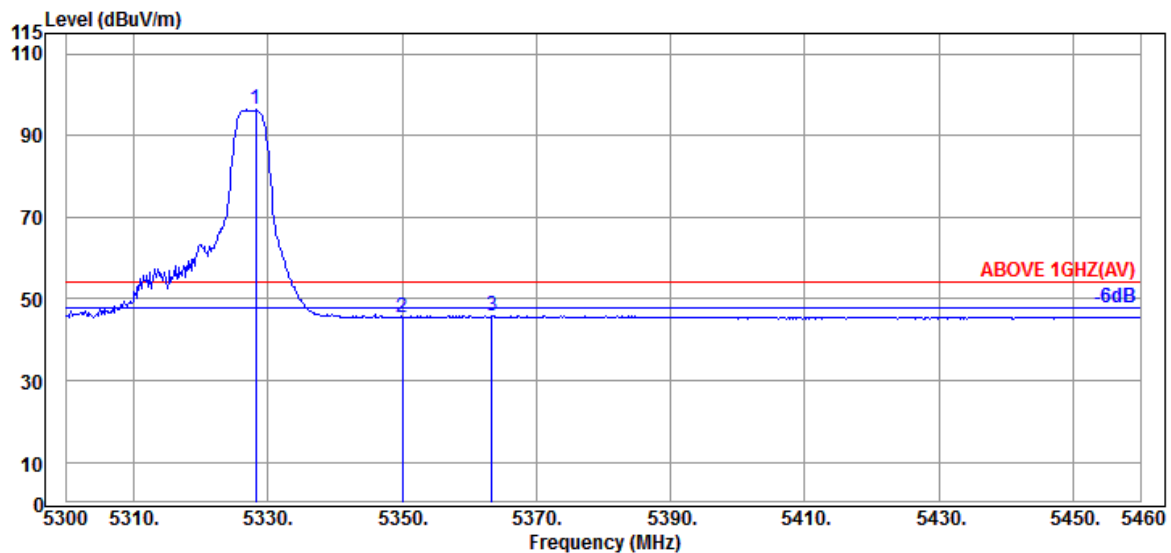

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.160	34.57	10.83	34.28	85.13	96.25	---	---	Average
5350.080	34.60	10.83	34.27	34.32	45.48	54.00	8.52	Average
5363.360	34.63	10.85	34.27	34.72	45.93	54.00	8.07	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	106/54	Frequency	TX 5320MHz

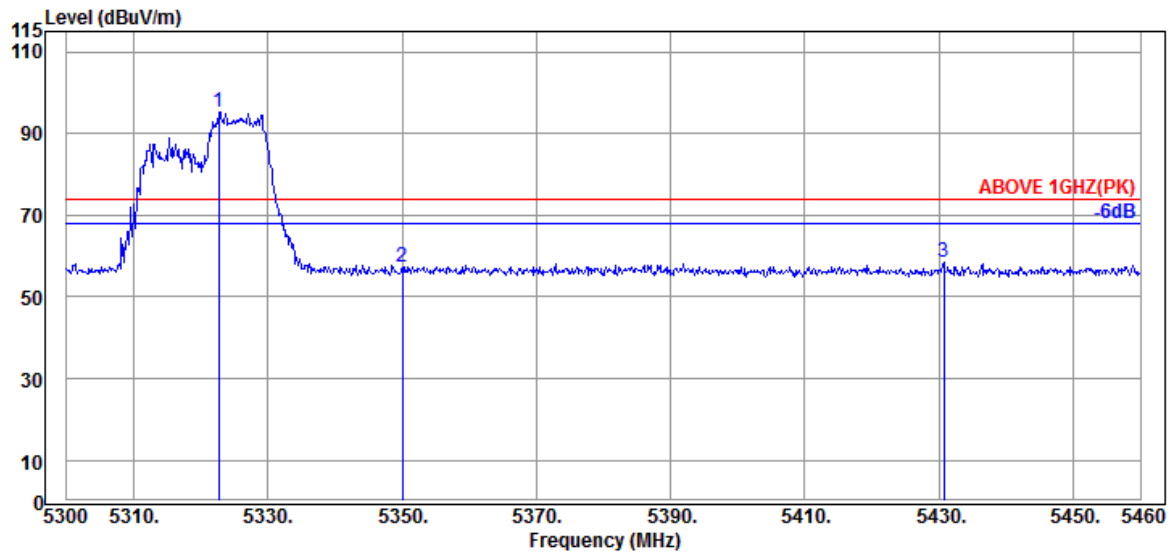

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.720	34.53	10.83	34.28	84.06	95.14	---	---	Peak
5350.080	34.60	10.83	34.27	46.04	57.20	74.00	16.80	Peak
5430.720	34.60	10.89	34.25	47.18	58.42	74.00	15.58	Peak

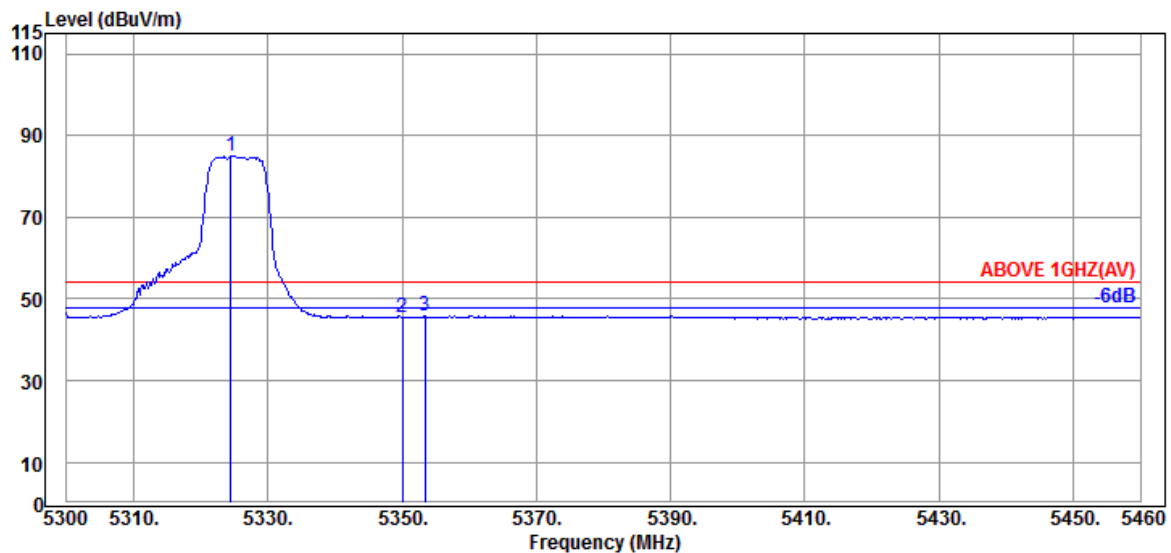

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.480	34.57	10.83	34.28	73.96	85.08	---	---	Average
5350.080	34.60	10.83	34.27	34.23	45.39	54.00	8.61	Average
5353.440	34.60	10.83	34.27	34.62	45.78	54.00	8.22	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	106/54	Frequency	TX 5320MHz

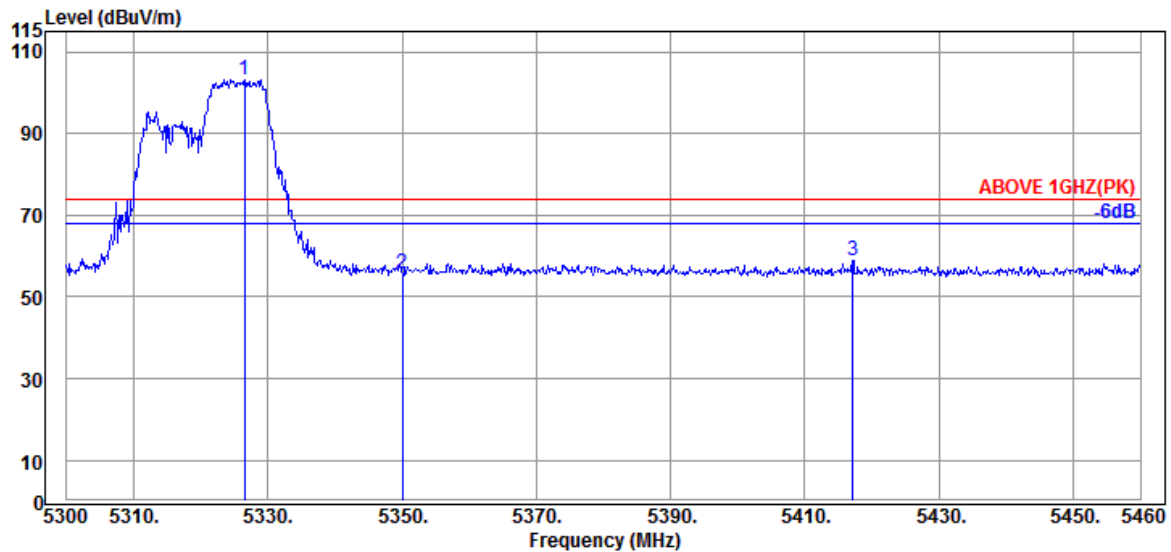

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.560	34.57	10.83	34.28	92.04	103.16	---	---	Peak
5350.080	34.60	10.83	34.27	44.73	55.89	74.00	18.11	Peak
5417.120	34.60	10.87	34.26	47.69	58.90	74.00	15.10	Peak

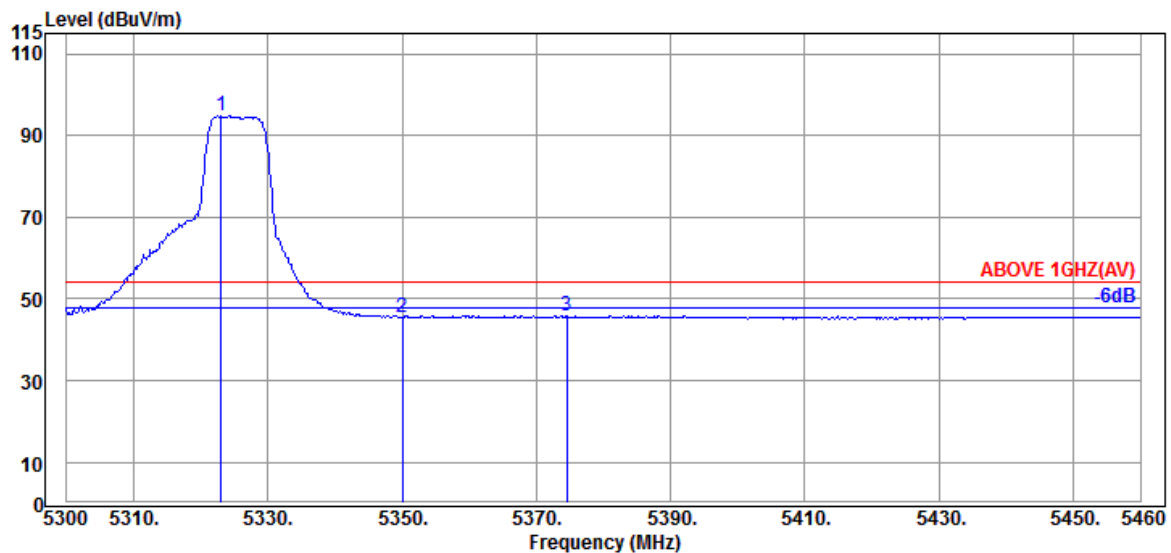

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.040	34.53	10.83	34.28	83.65	94.73	---	---	Average
5350.080	34.60	10.83	34.27	34.45	45.61	54.00	8.39	Average
5374.560	34.67	10.85	34.27	34.68	45.93	54.00	8.07	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

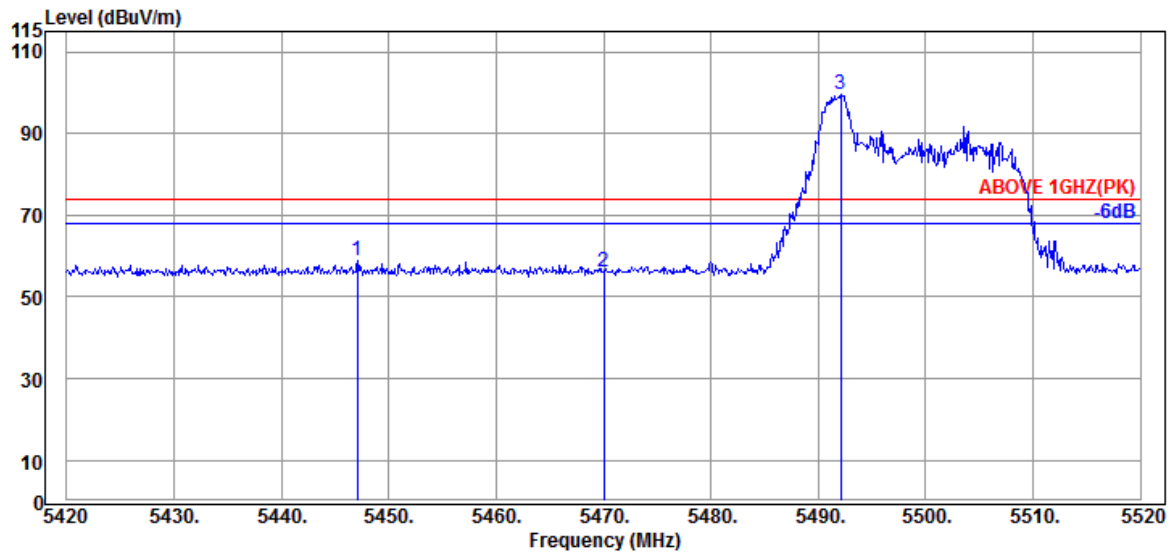

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.100	34.55	10.89	34.25	47.51	58.70	74.00	15.30	Peak
5470.000	34.47	10.91	34.24	45.13	56.27	74.00	17.73	Peak
@ 5492.100	34.43	10.91	34.23	88.46	99.57	---	---	Peak

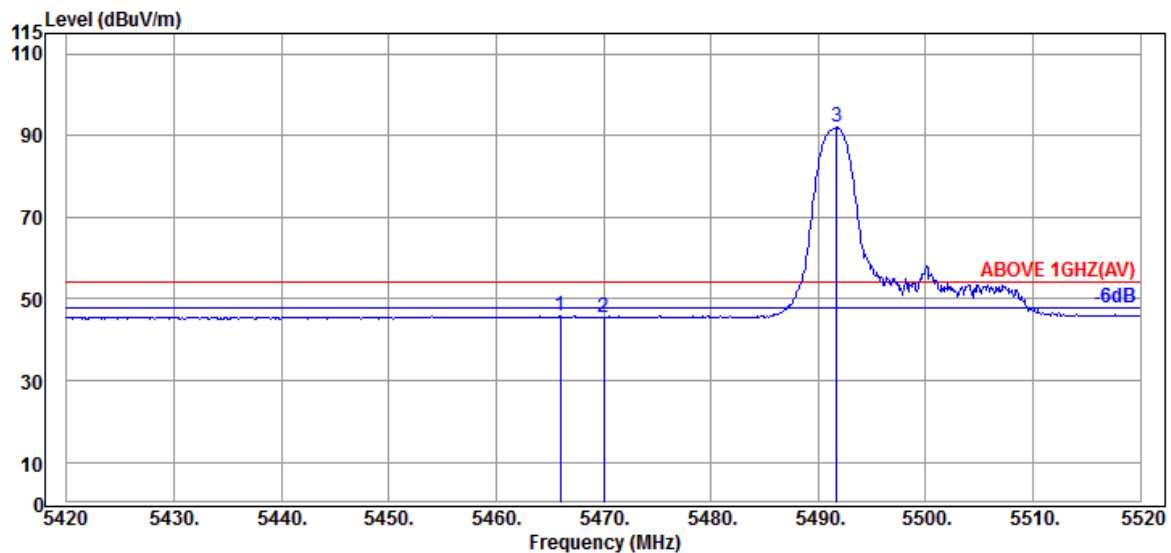

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.000	34.47	10.91	34.24	34.56	45.70	54.00	8.30	Average
5470.000	34.47	10.91	34.24	34.29	45.43	54.00	8.57	Average
@ 5491.700	34.43	10.91	34.23	80.80	91.91	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

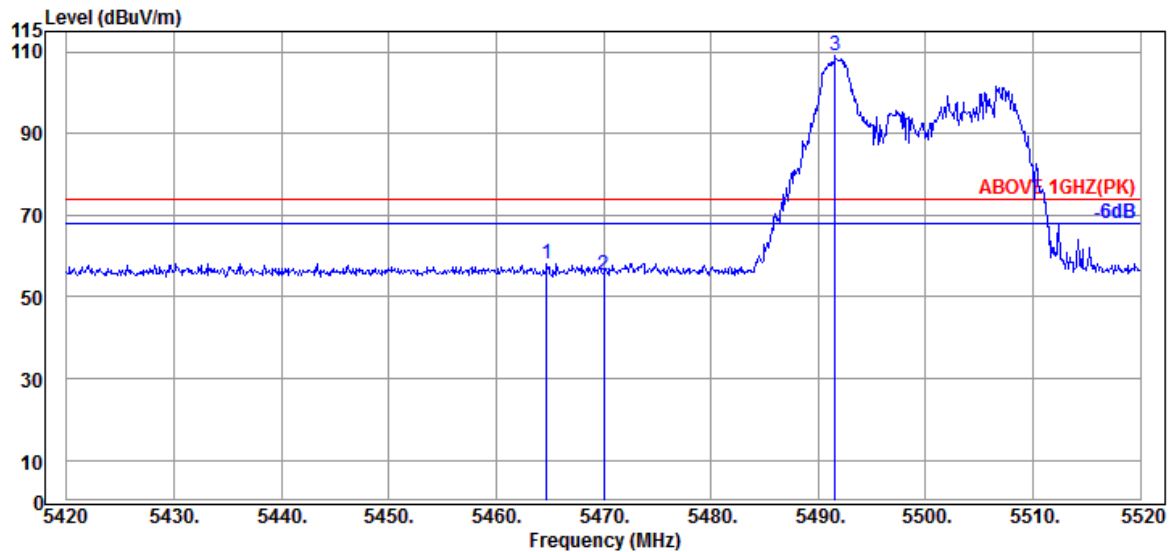

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.700	34.47	10.91	34.24	46.98	58.12	74.00	15.88	Peak
5470.000	34.47	10.91	34.24	44.36	55.50	74.00	18.50	Peak
@ 5491.600	34.43	10.91	34.23	97.81	108.92	---	---	Peak

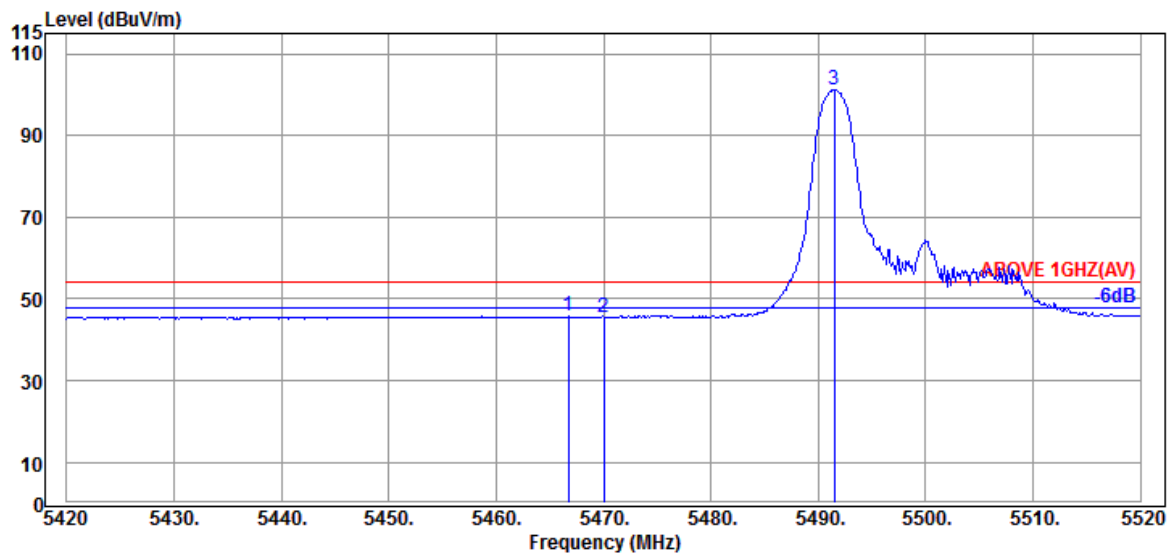

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.700	34.47	10.91	34.24	34.51	45.65	54.00	8.35	Average
5470.000	34.47	10.91	34.24	34.37	45.51	54.00	8.49	Average
@ 5491.500	34.43	10.91	34.23	90.19	101.30	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section..

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

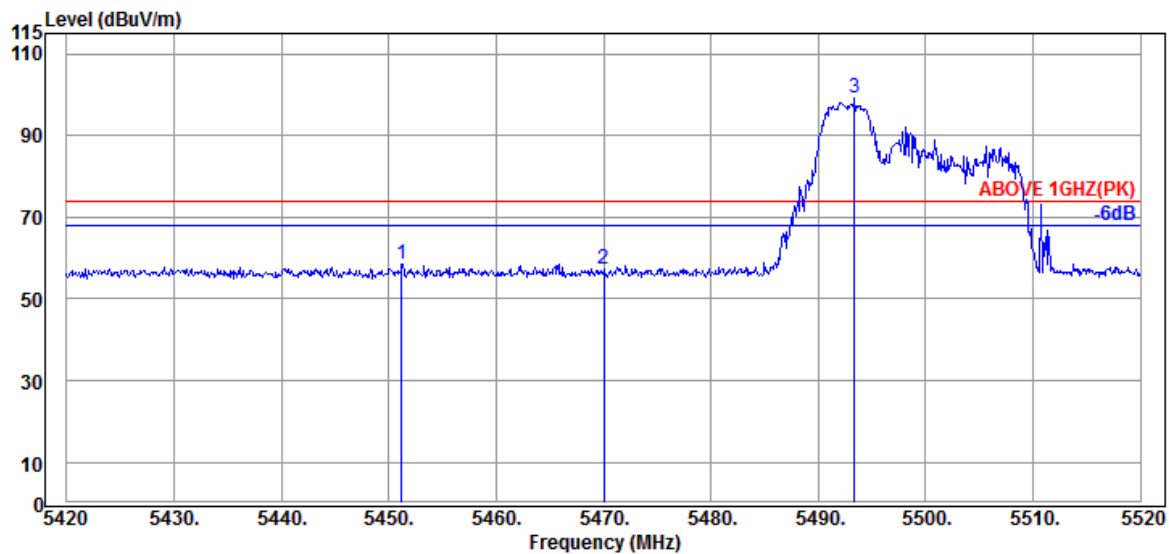

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.200	34.50	10.89	34.24	47.35	58.50	74.00	15.50	Peak
5470.000	34.47	10.91	34.24	46.05	57.19	74.00	16.81	Peak
@ 5493.400	34.43	10.91	34.23	87.89	99.00	---	---	Peak

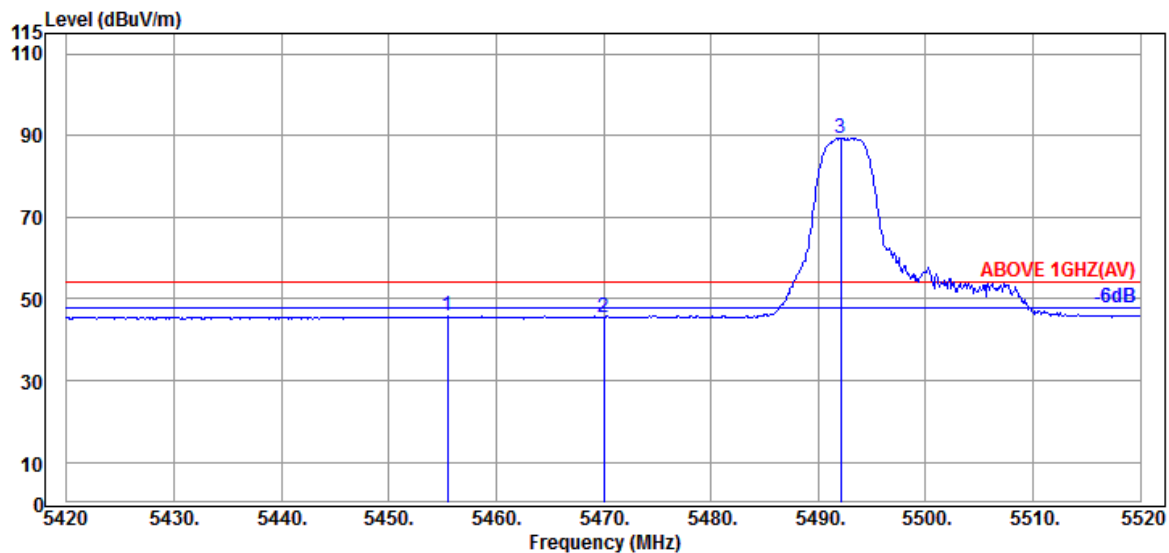


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.500	34.50	10.89	34.24	34.52	45.67	54.00	8.33	Average
5470.000	34.47	10.91	34.24	34.19	45.33	54.00	8.67	Average
@ 5492.100	34.43	10.91	34.23	78.22	89.33	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

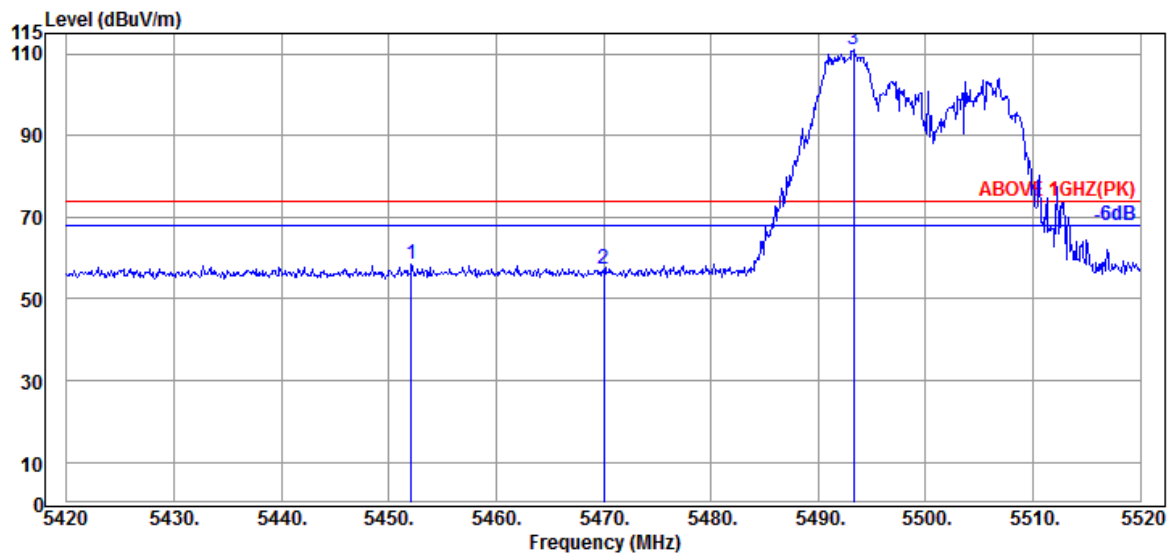

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5452.100	34.50	10.89	34.24	47.24	58.38	74.00	15.62	Peak
5470.000	34.47	10.91	34.24	46.19	56.63	74.00	17.37	Peak
@ 5493.300	34.43	10.91	34.23	99.77	108.33	---	---	Peak

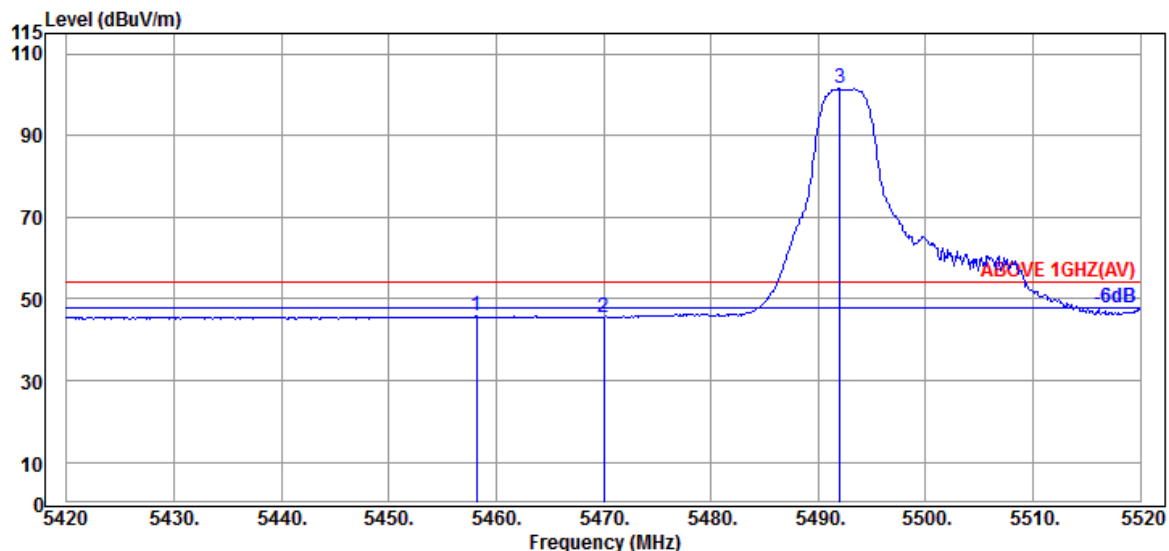

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5458.200	34.50	10.89	34.24	34.66	45.81	54.00	8.19	Average
5470.000	34.47	10.91	34.24	34.40	45.54	54.00	8.46	Average
@ 5492.000	34.43	10.91	34.23	90.39	101.50	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

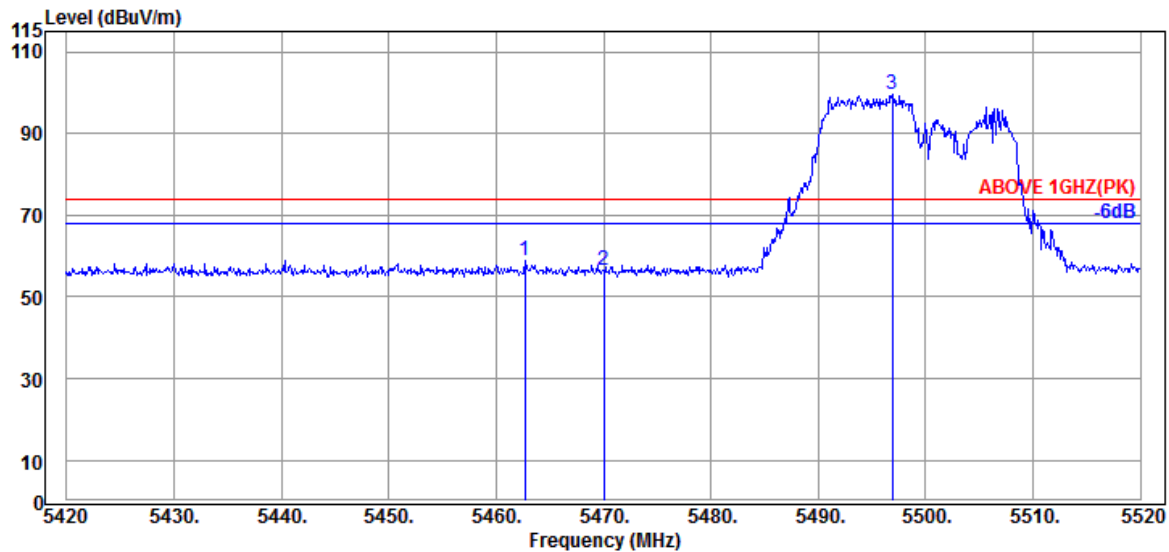

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.700	34.50	10.91	34.24	47.85	59.02	74.00	14.98	Peak
5470.000	34.47	10.91	34.24	45.43	56.57	74.00	17.43	Peak
@ 5496.900	34.40	10.93	34.23	88.34	99.44	---	---	Peak

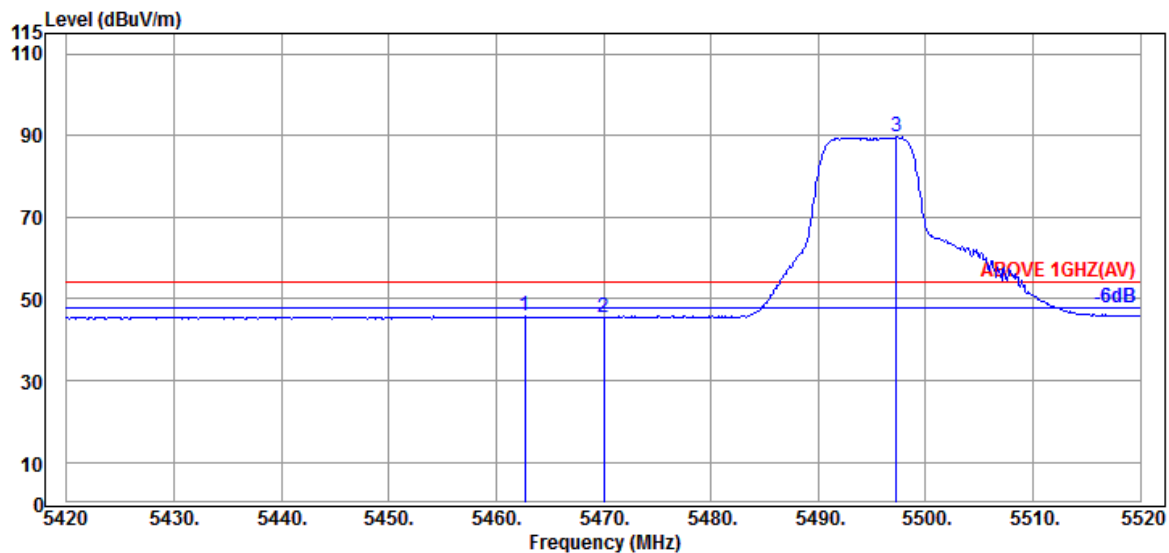

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.700	34.50	10.91	34.24	34.55	45.72	54.00	8.28	Average
5470.000	34.47	10.91	34.24	34.28	45.42	54.00	8.58	Average
@ 5497.300	34.40	10.93	34.23	78.69	89.79	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

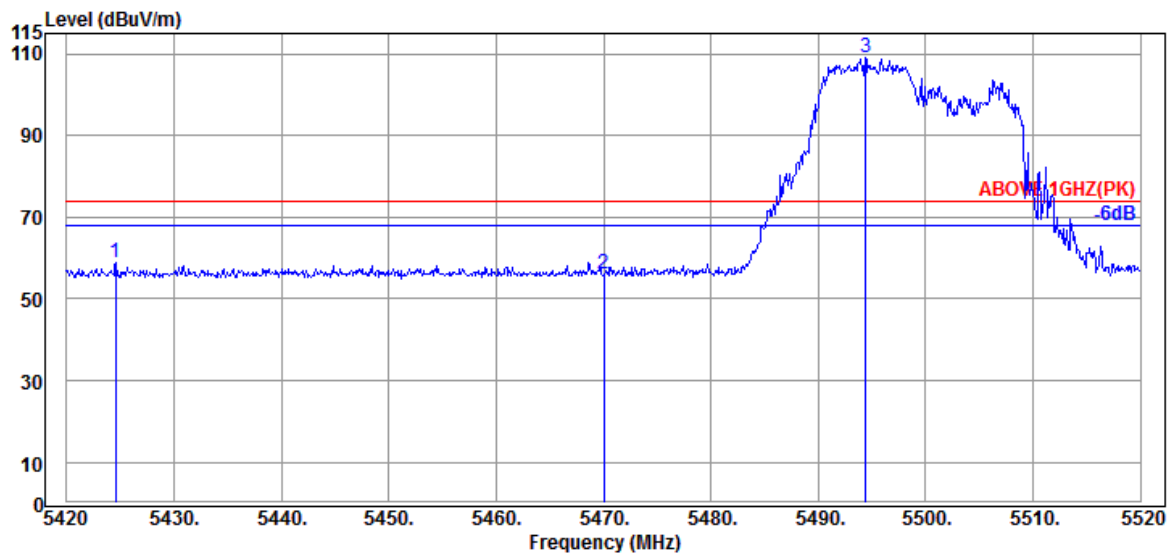

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5424.600	34.60	10.87	34.25	47.75	58.97	74.00	15.03	Peak
5470.000	34.47	10.91	34.24	44.93	56.07	74.00	17.93	Peak
@ 5494.400	34.43	10.91	34.23	97.77	108.88	---	---	Peak

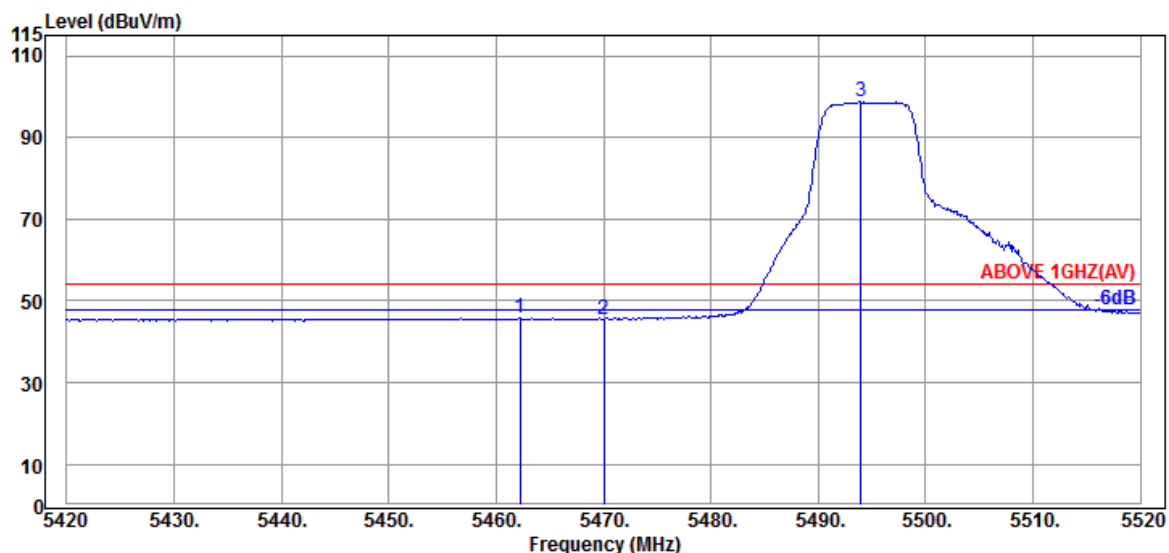

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.200	34.50	10.91	34.24	34.69	45.86	54.00	8.14	Average
5470.000	34.47	10.91	34.24	34.39	45.53	54.00	8.47	Average
@ 5494.000	34.43	10.91	34.23	87.58	98.69	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/8	Frequency	TX 5700MHz

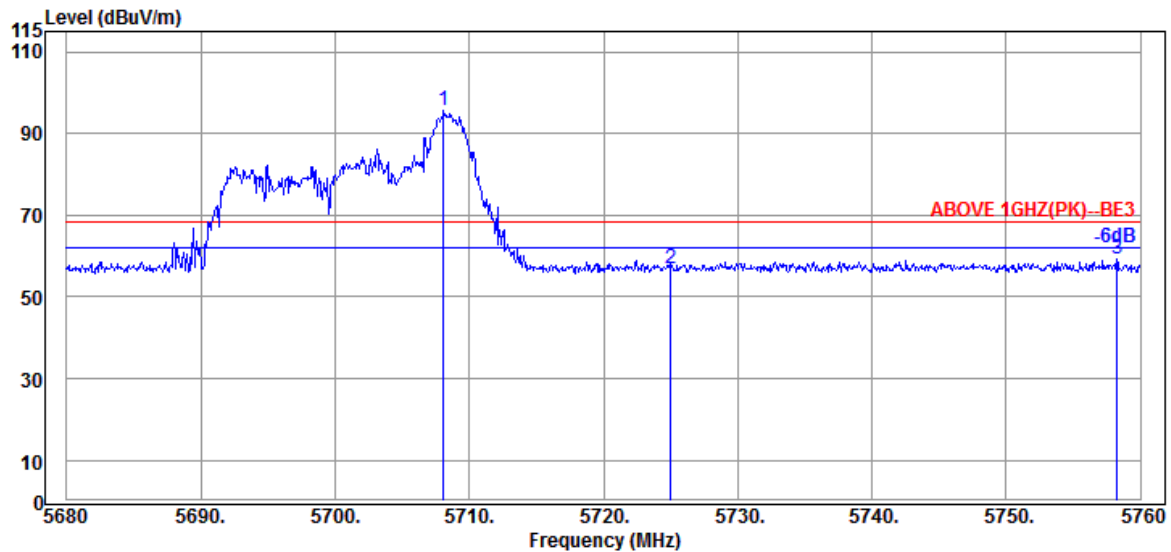

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5708.080	34.53	11.03	34.32	84.41	95.65	---	---	Peak
	5725.040	34.67	11.05	34.32	45.51	56.91	68.20	11.29	Peak
	5758.240	34.87	11.06	34.35	47.54	59.12	68.20	9.08	Peak

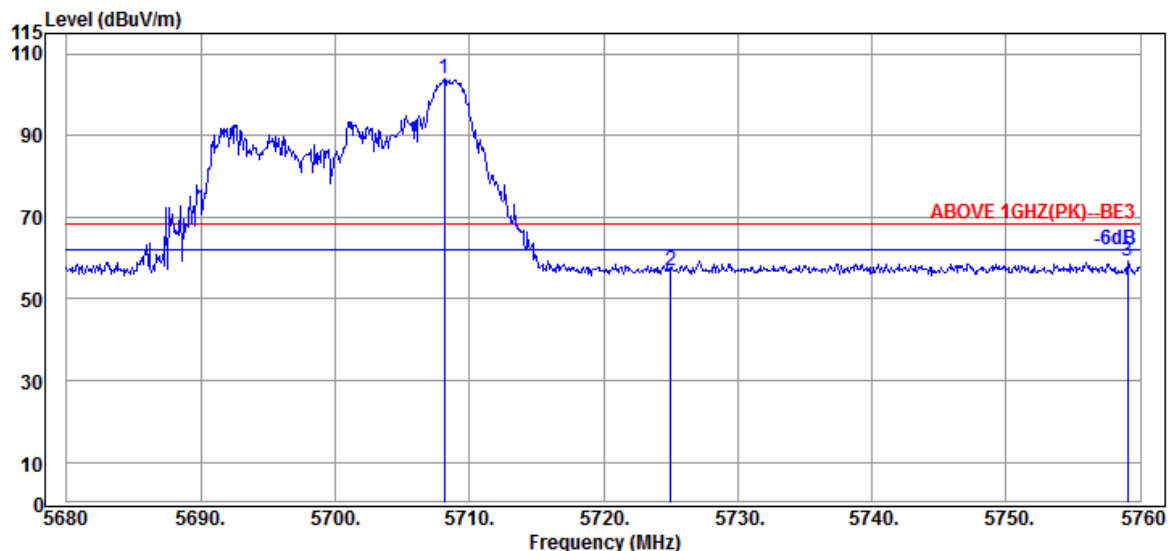

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5708.160	34.53	11.03	34.32	92.61	103.85	---	---	Peak
	5725.040	34.67	11.05	34.32	45.63	57.03	68.20	11.17	Peak
	5759.040	34.87	11.06	34.35	47.66	59.24	68.20	8.96	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/40	Frequency	TX 5700MHz

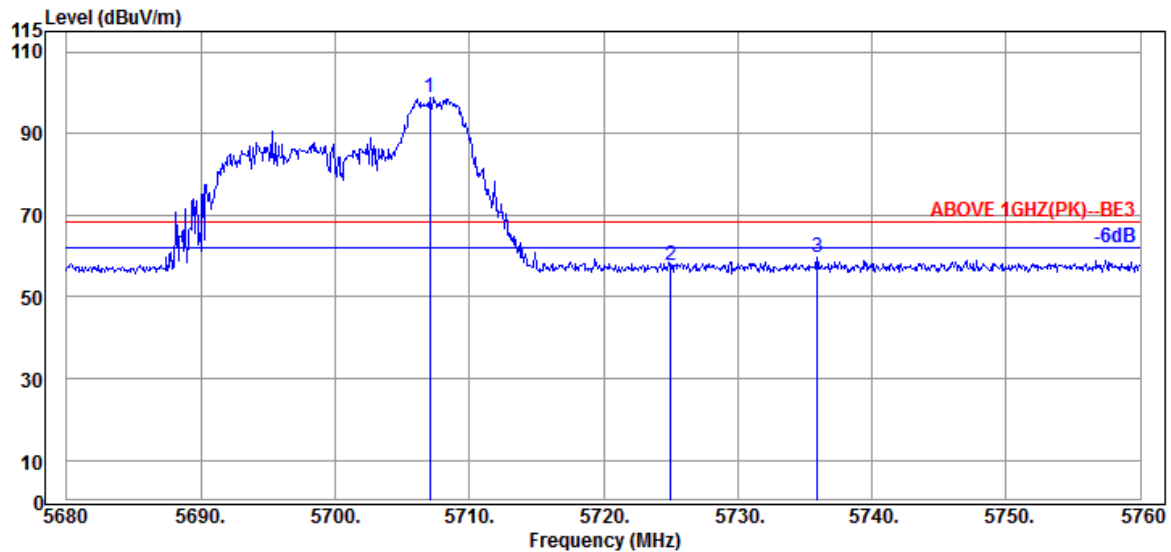

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.360	34.53	11.03	34.32	88.77	100.01	---	---	Peak
5725.040	34.67	11.05	34.32	46.28	57.68	68.20	10.52	Peak
5754.160	34.80	11.06	34.33	47.57	59.10	68.20	9.10	Peak

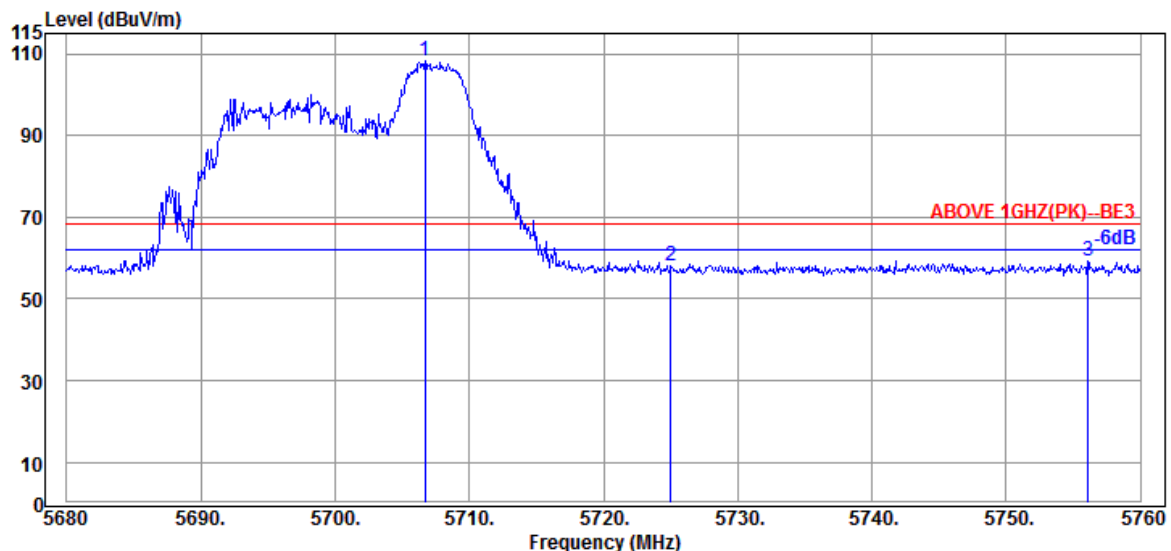

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.720	34.53	11.03	34.32	97.02	108.26	---	---	Peak
5725.040	34.67	11.05	34.32	46.57	57.97	68.20	10.23	Peak
5756.080	34.87	11.06	34.35	47.79	59.37	68.20	8.83	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/54	Frequency	TX 5700MHz

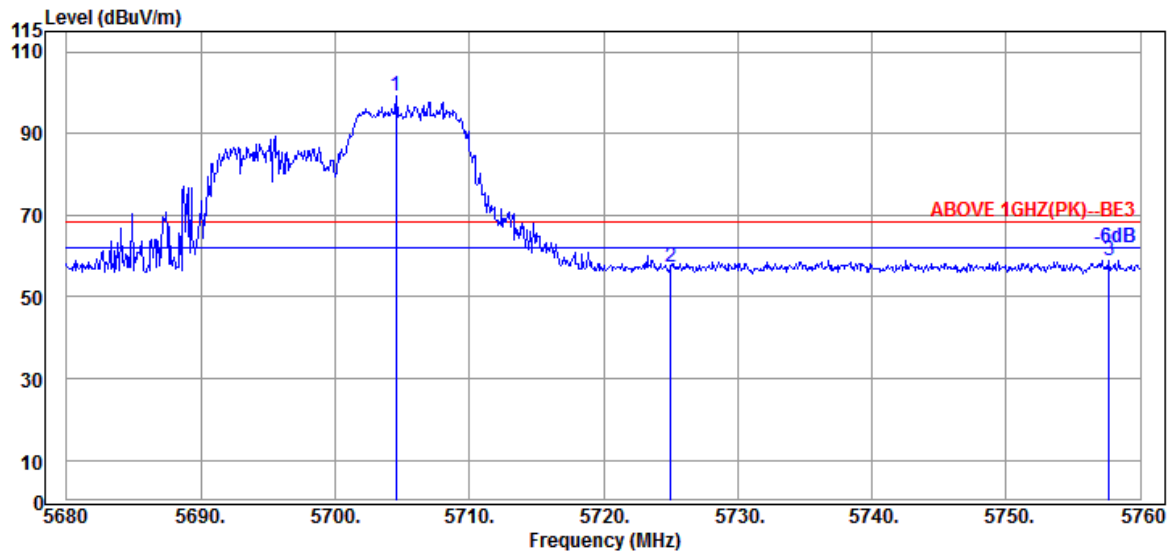

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5704.560	34.40	11.03	34.31	88.26	99.38	---	---	Peak
	5725.040	34.67	11.05	34.32	46.04	57.44	68.20	10.76	Peak
	5757.680	34.87	11.06	34.35	47.48	59.06	68.20	9.14	Peak

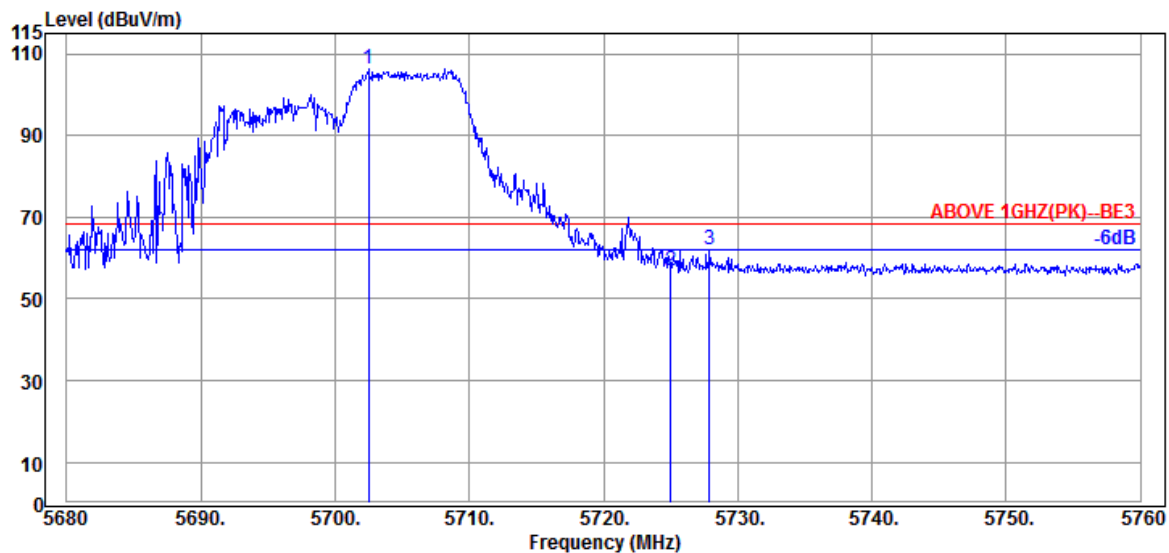

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5702.480	34.40	11.03	34.31	95.16	106.28	---	---	Peak
	5725.040	34.67	11.05	34.32	45.68	57.08	68.20	11.12	Peak
	5727.920	34.67	11.05	34.32	50.58	61.98	68.20	6.22	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	III
RU Configuration	26/0	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

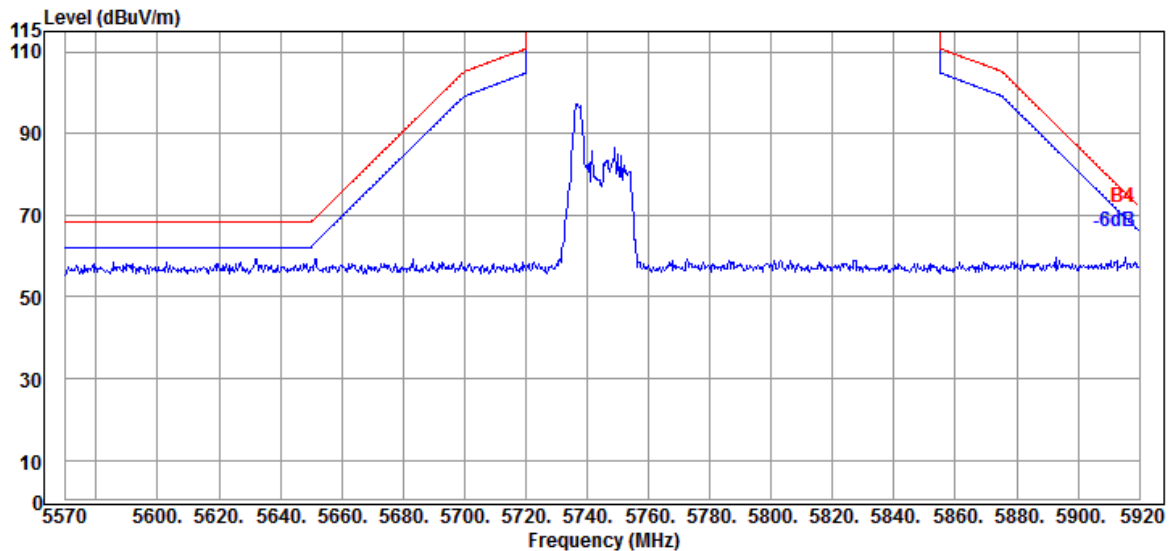

Antenna at Vertical Polarization

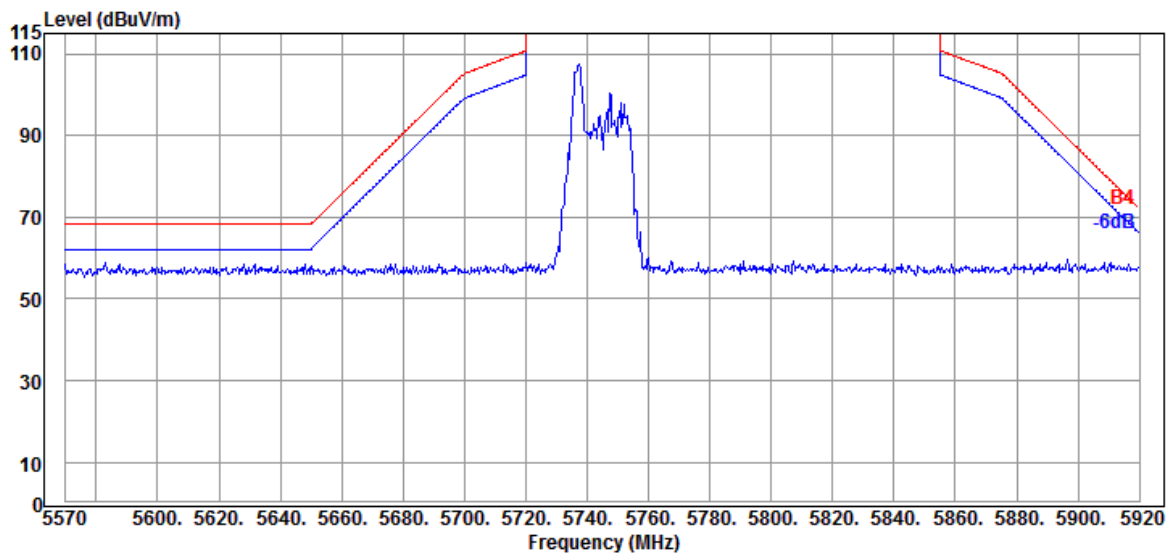

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,


New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	III
RU Configuration	52/37	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

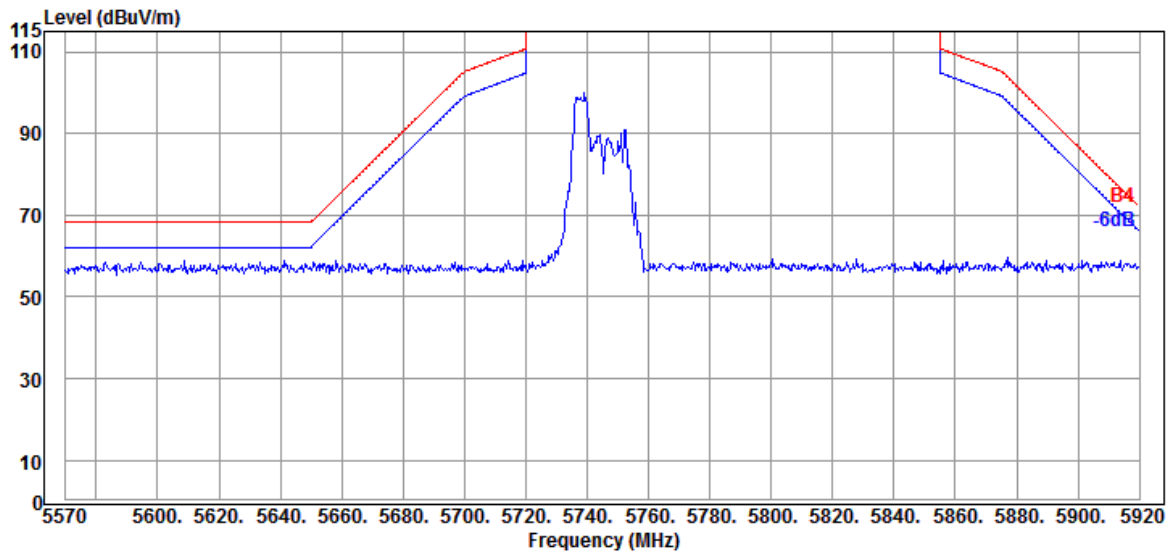


Antenna at Vertical Polarization

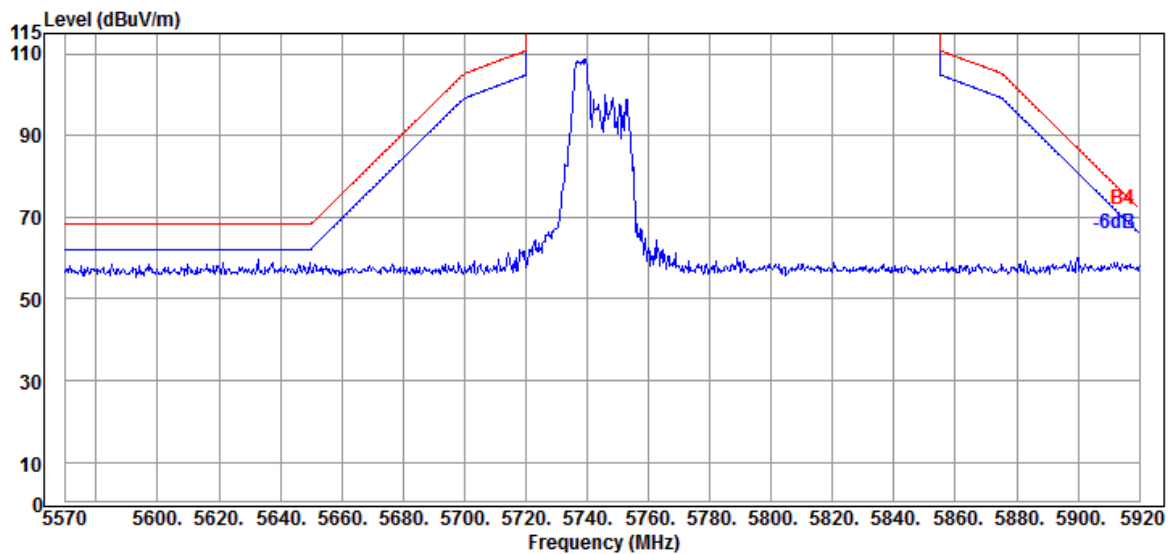


Mode	802.11ax-HE20	U-NII Band	III
RU Configuration	106/53	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

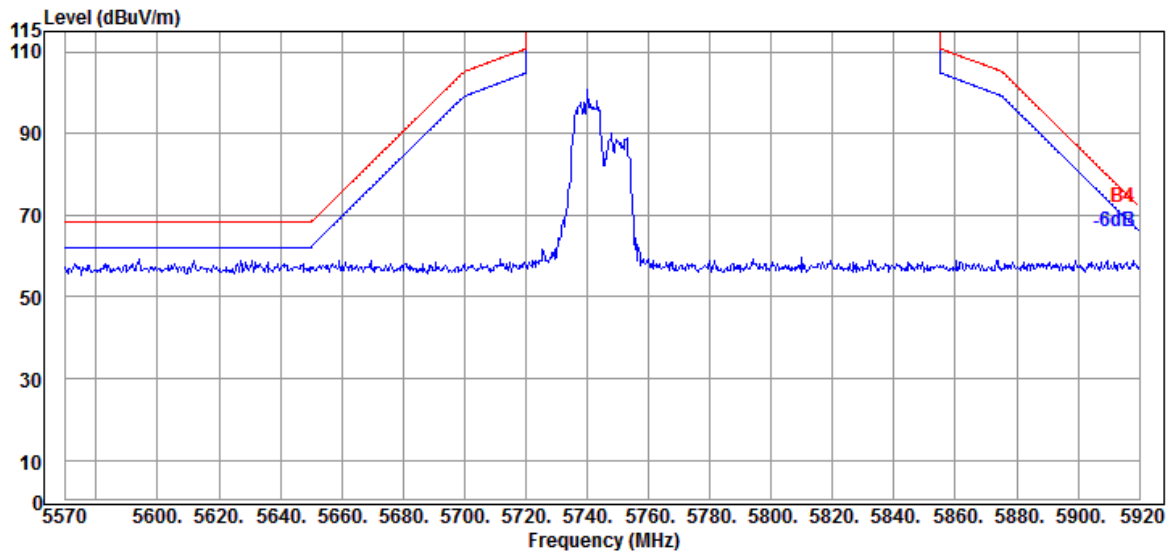

Antenna at Vertical Polarization

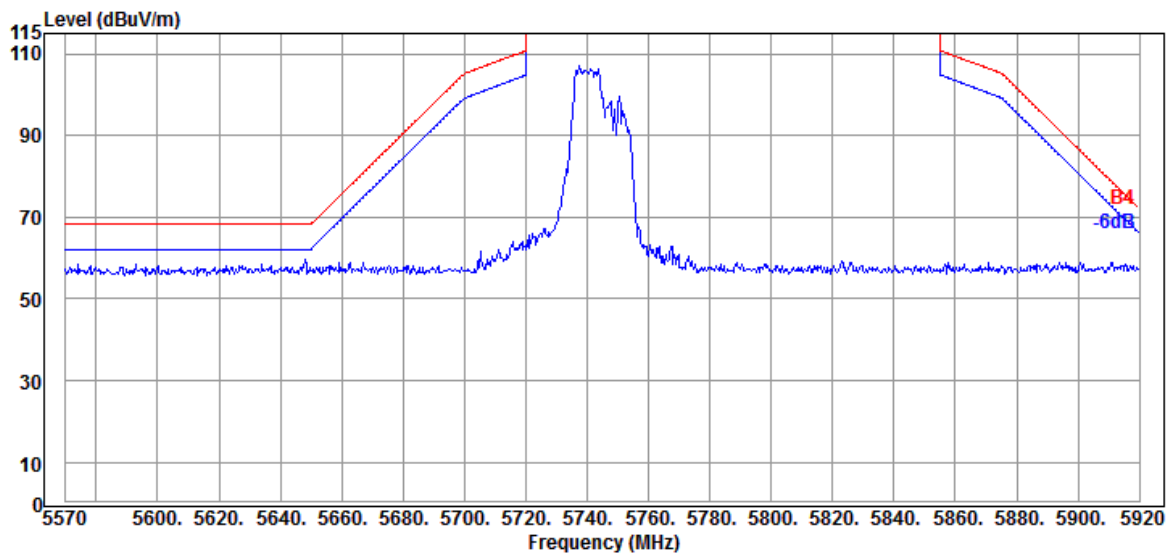


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	III
RU Configuration	26/8	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

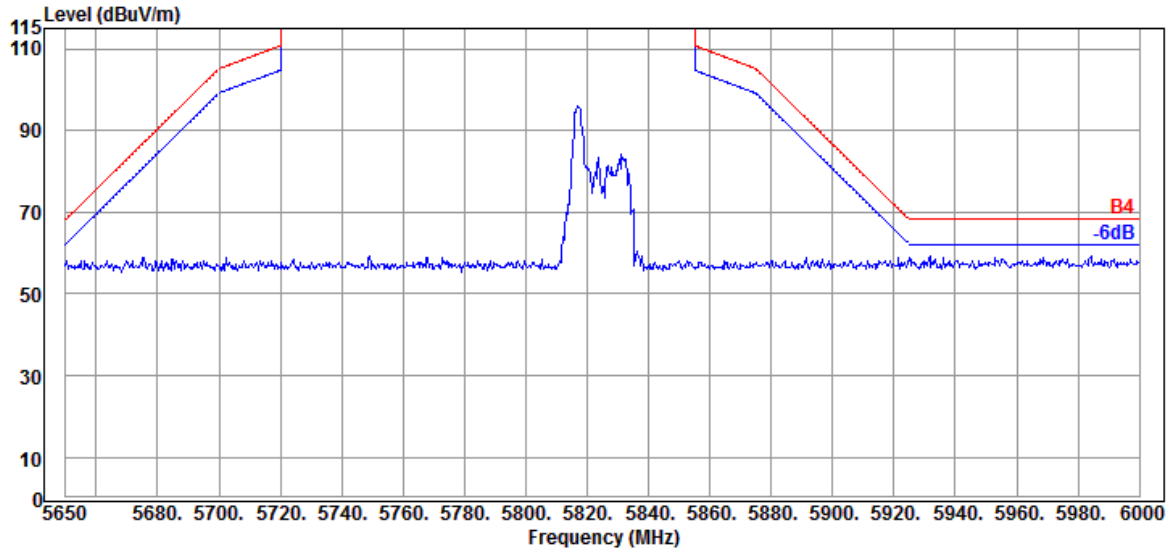

Antenna at Vertical Polarization

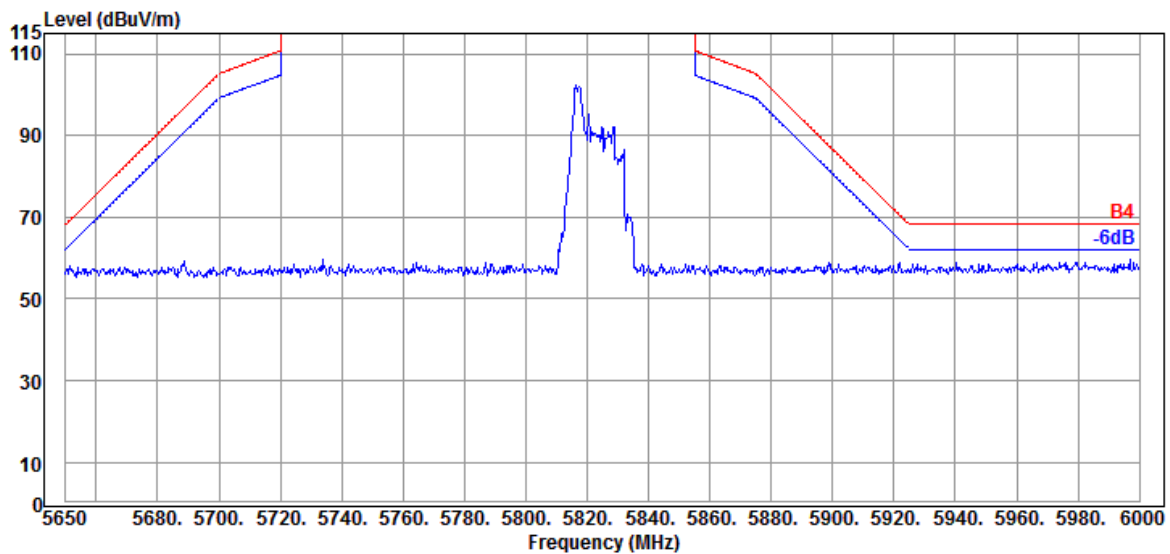


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	III
RU Configuration	52/40	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

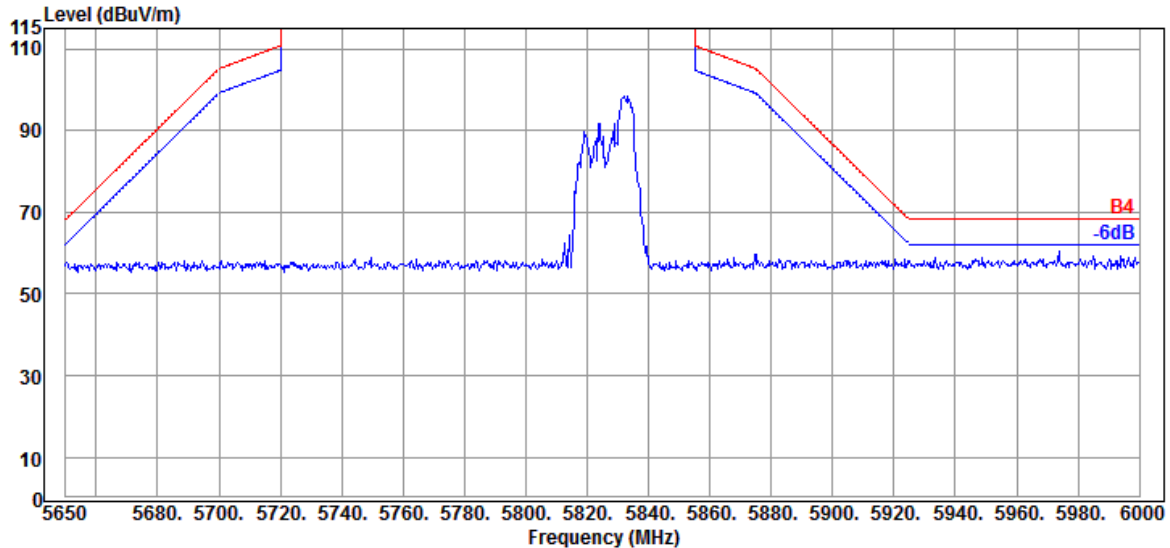

Antenna at Vertical Polarization

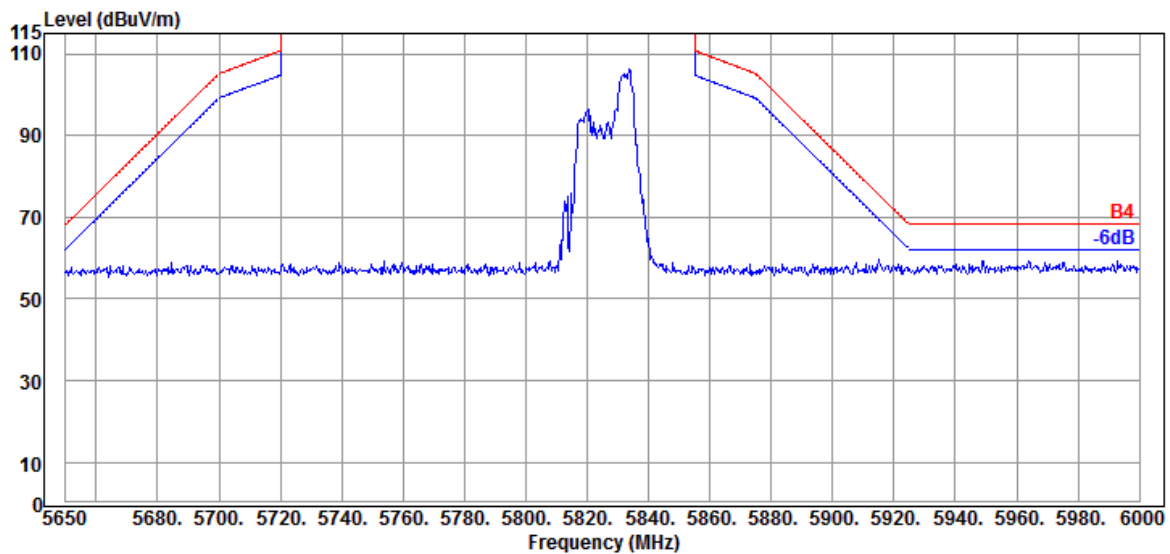


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	III
RU Configuration	106/54	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

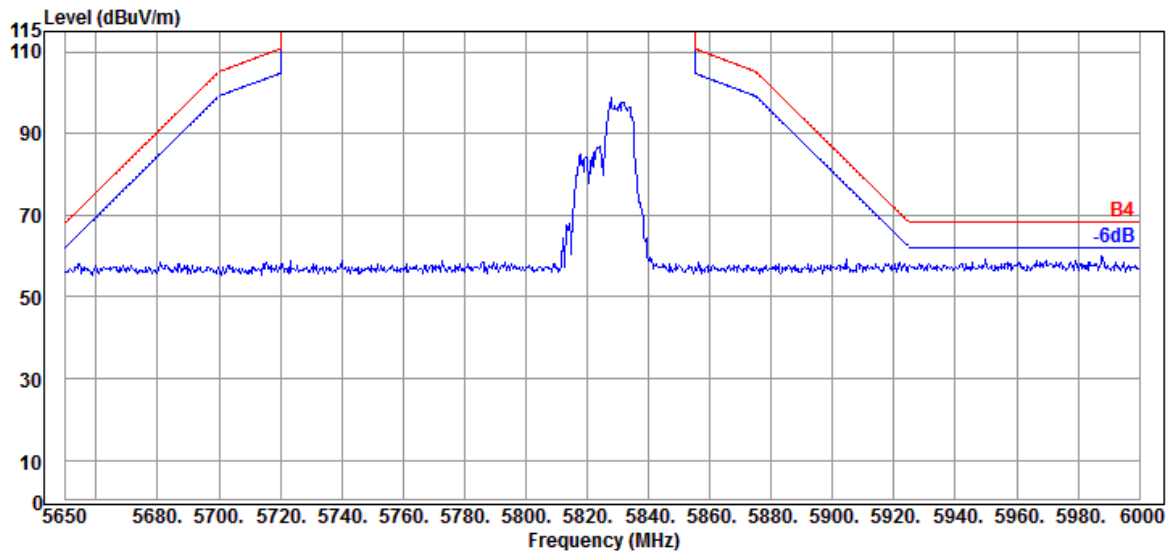

Antenna at Vertical Polarization

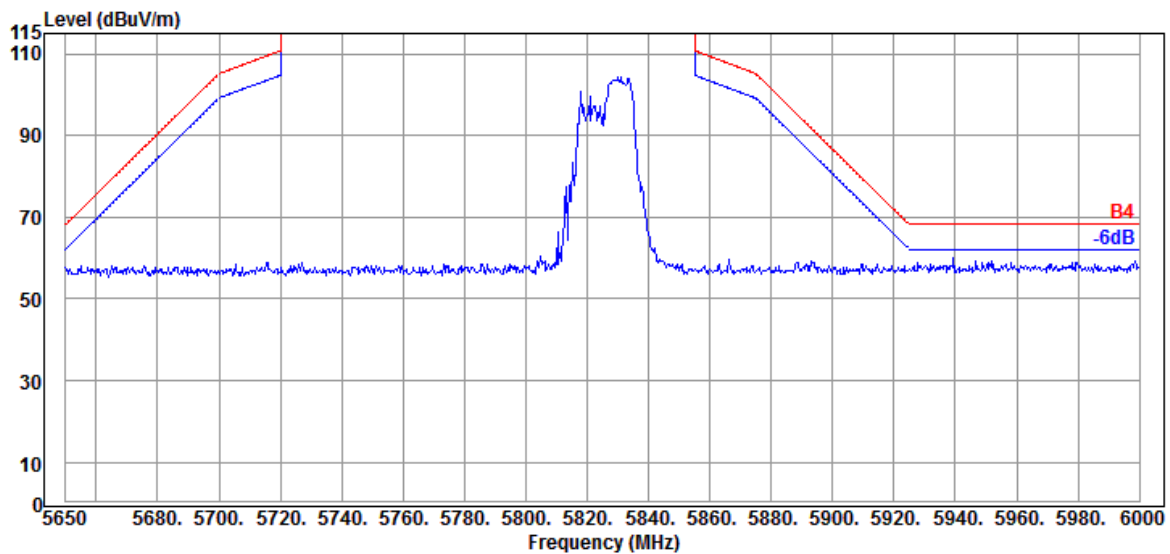

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	I
RU Configuration	242/61	Frequency	TX 5190MHz

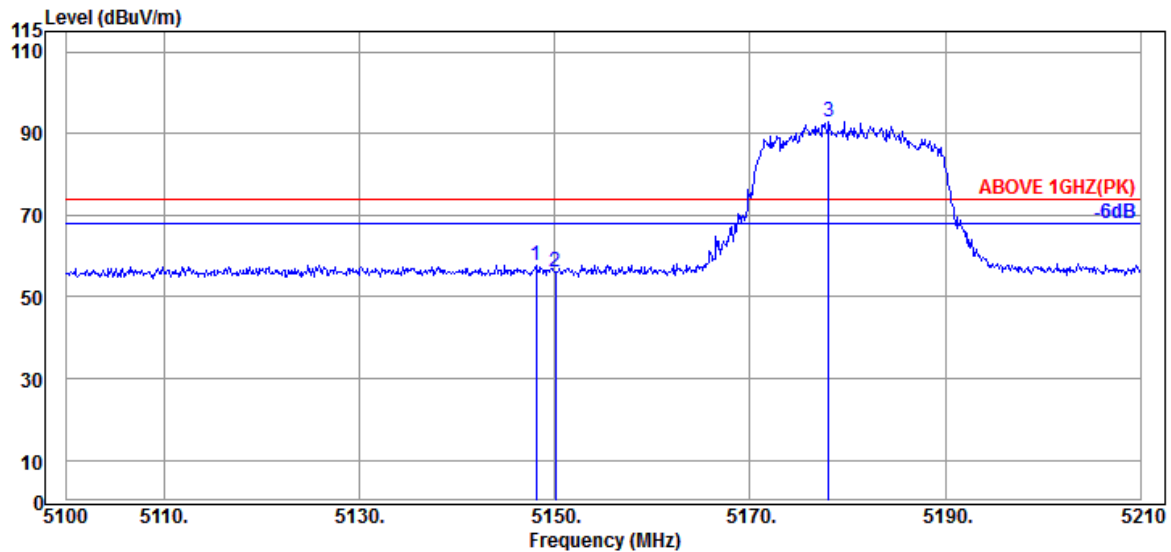

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.070	34.20	10.70	34.35	47.21	57.76	74.00	16.24	Peak
5150.050	34.20	10.70	34.35	45.63	56.18	74.00	17.82	Peak
@ 5178.100	34.20	10.72	34.34	82.33	92.91	---	---	Peak

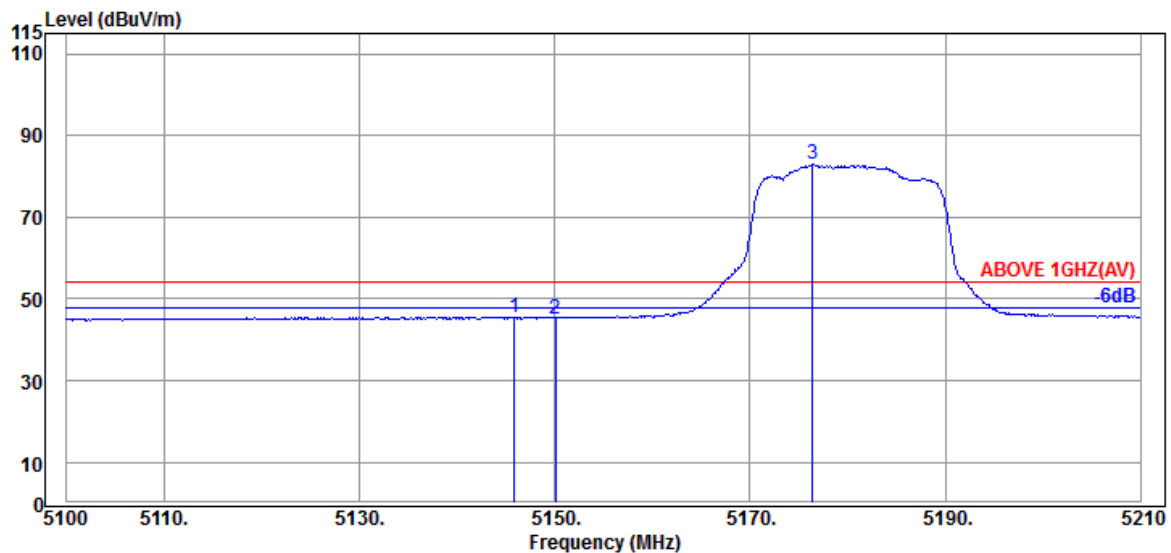

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.870	34.20	10.70	34.35	35.08	45.63	54.00	8.37	Average
5150.050	34.20	10.70	34.35	34.65	45.20	54.00	8.80	Average
@ 5176.450	34.20	10.72	34.34	72.26	82.84	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	I
RU Configuration	242/61	Frequency	TX 5190MHz

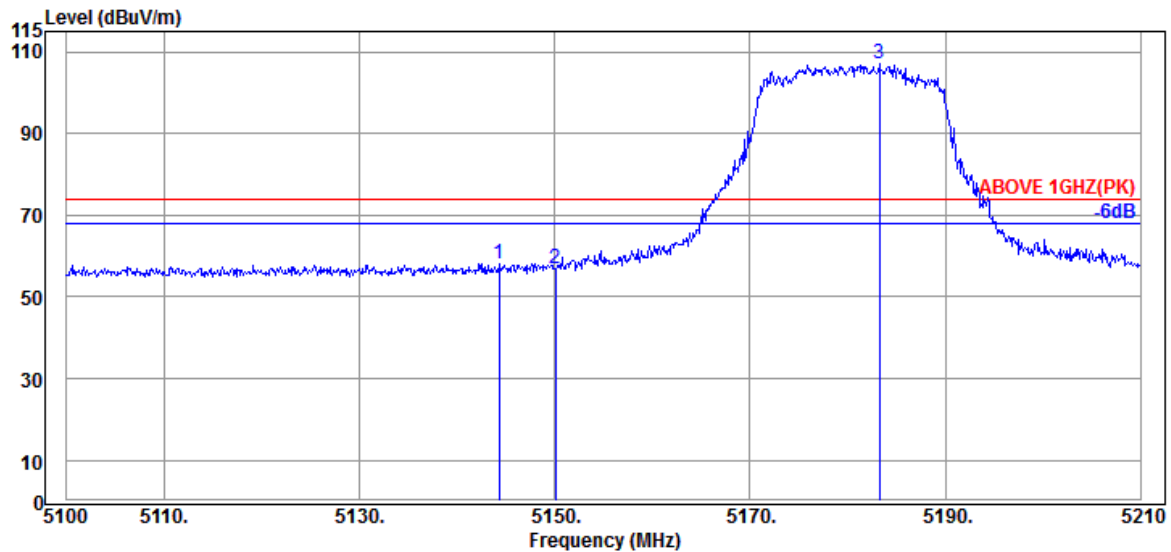

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5144.330	34.20	10.70	34.35	47.67	58.22	74.00	15.78	Peak
5150.050	34.20	10.70	34.35	46.55	57.10	74.00	16.90	Peak
@ 5183.270	34.20	10.72	34.34	96.54	107.12	---	---	Peak

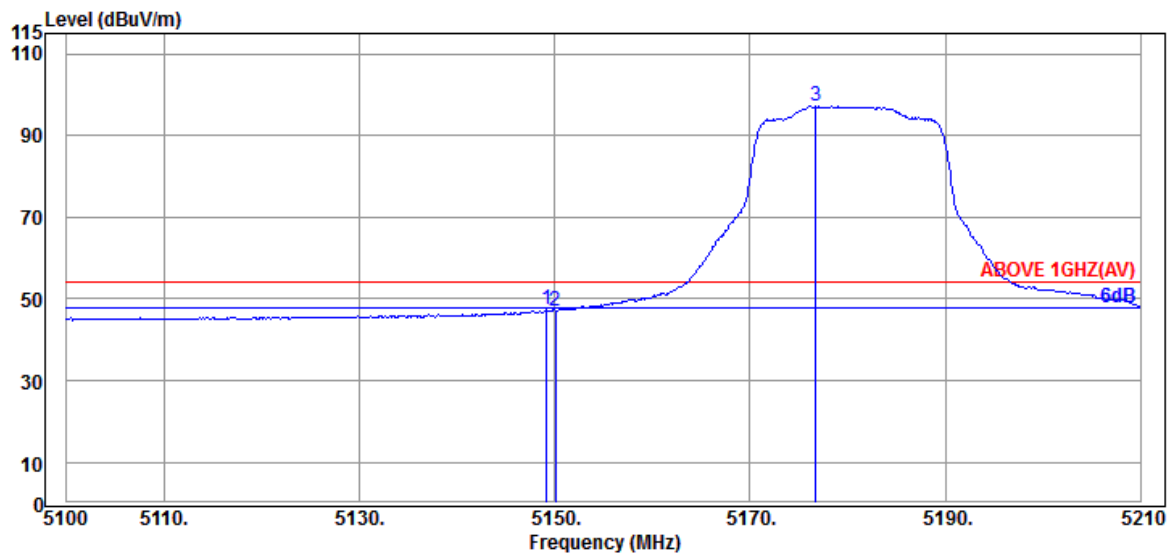

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5149.170	34.20	10.70	34.35	36.70	47.25	54.00	6.75	Average
5150.050	34.20	10.70	34.35	36.62	47.17	54.00	6.83	Average
@ 5176.780	34.20	10.72	34.34	86.69	97.27	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2A
RU Configuration	242/62	Frequency	TX 5310MHz

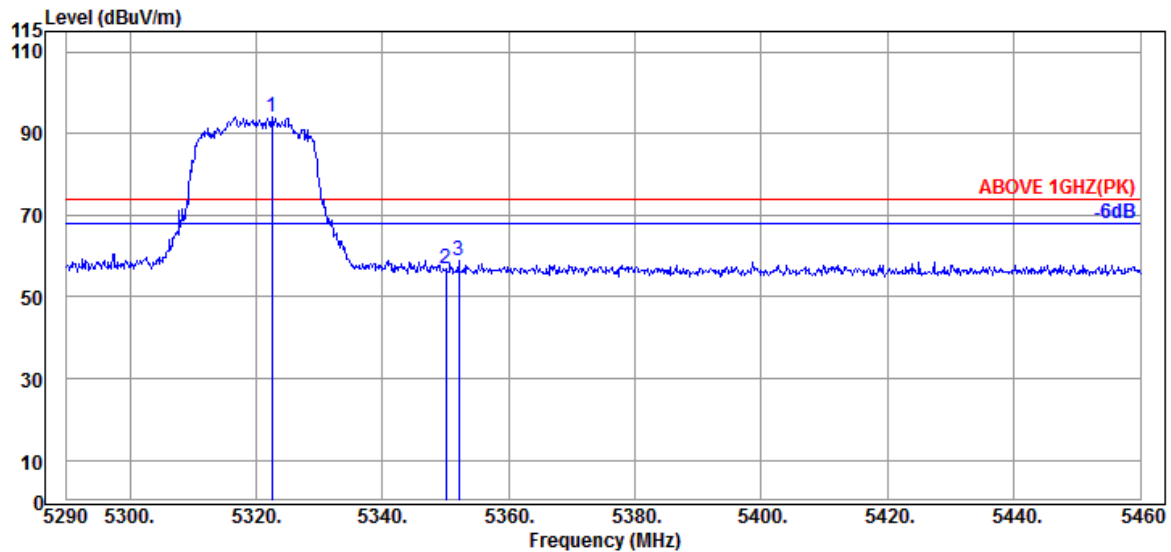

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5322.470	34.53	10.83	34.28	82.83	93.91	---	---	Peak
	5350.010	34.60	10.83	34.27	45.85	57.01	74.00	16.99	Peak
	5352.050	34.60	10.83	34.27	47.62	58.78	74.00	15.22	Peak

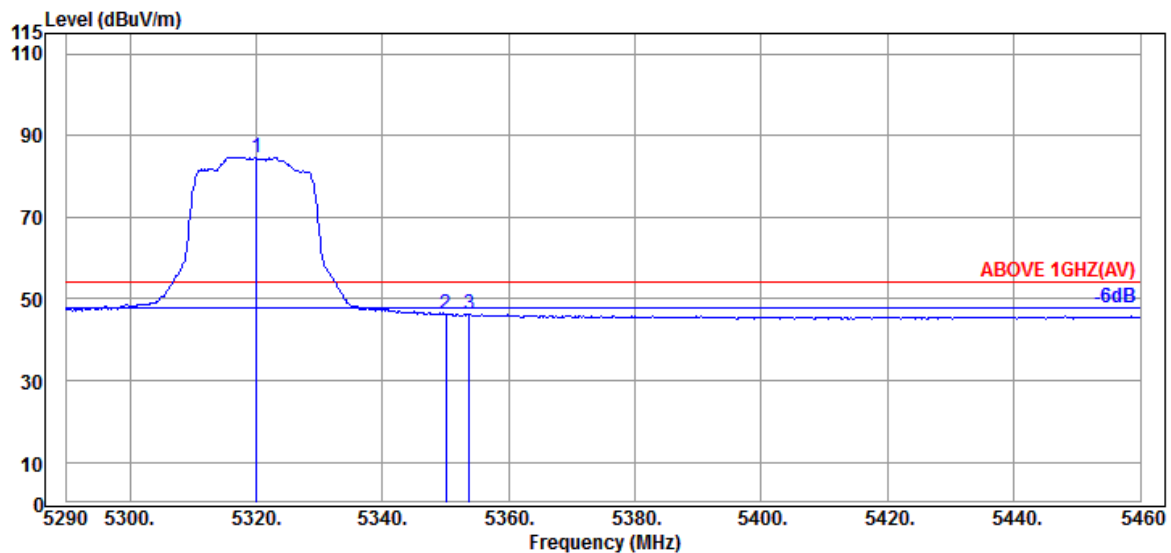

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5320.090	34.53	10.81	34.29	73.66	84.71	---	---	Average
	5350.010	34.60	10.83	34.27	35.11	46.27	54.00	7.73	Average
	5353.750	34.60	10.83	34.27	35.11	46.27	54.00	7.73	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2A
RU Configuration	242/62	Frequency	TX 5310MHz

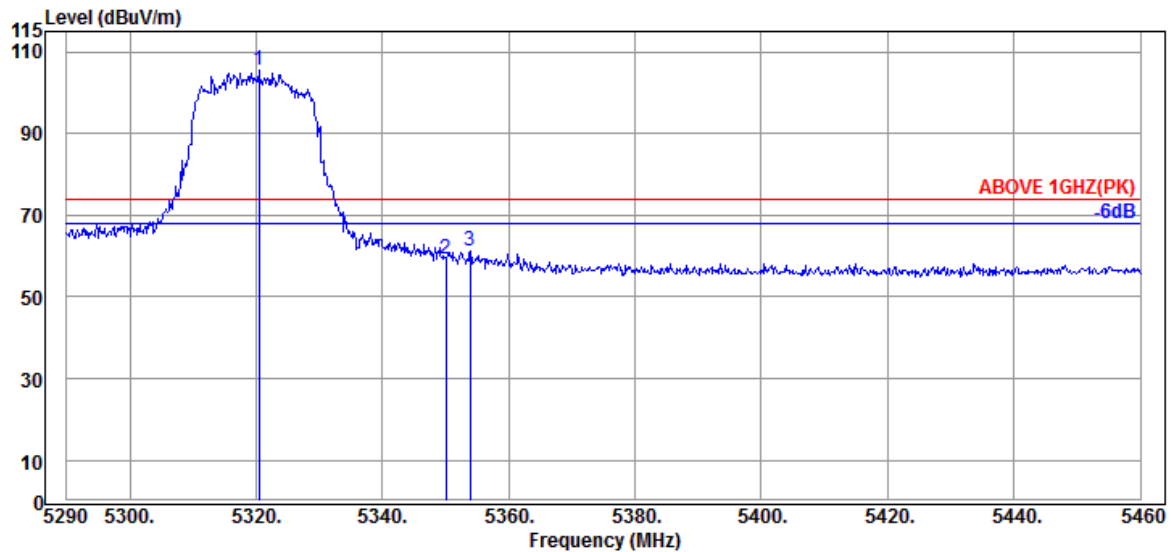

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5320.430	34.53	10.81	34.29	94.31	105.36	---	---	Peak
5350.010	34.60	10.83	34.27	48.03	59.19	74.00	14.81	Peak
5353.920	34.60	10.83	34.27	49.98	61.14	74.00	12.86	Peak

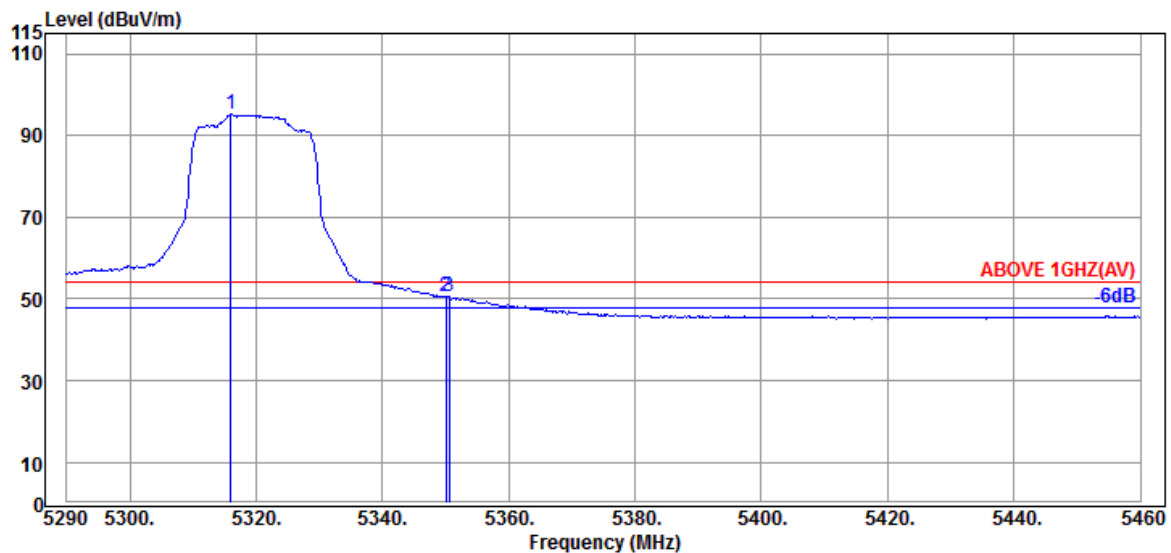

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.010	34.53	10.81	34.29	84.00	95.05	---	---	Average
5350.010	34.60	10.83	34.27	39.24	50.40	54.00	3.60	Average
5350.520	34.60	10.83	34.27	39.55	50.71	54.00	3.29	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

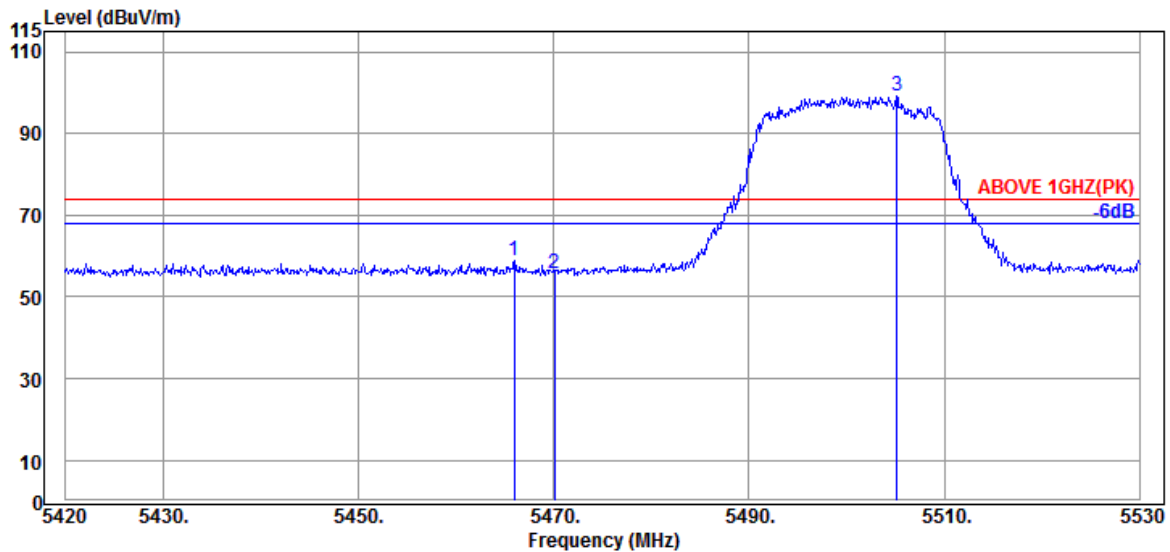

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.980	34.47	10.91	34.24	47.66	58.80	74.00	15.20	Peak
5470.050	34.47	10.91	34.24	44.63	55.77	74.00	18.23	Peak
@ 5505.140	34.40	10.93	34.24	88.04	99.13	---	---	Peak

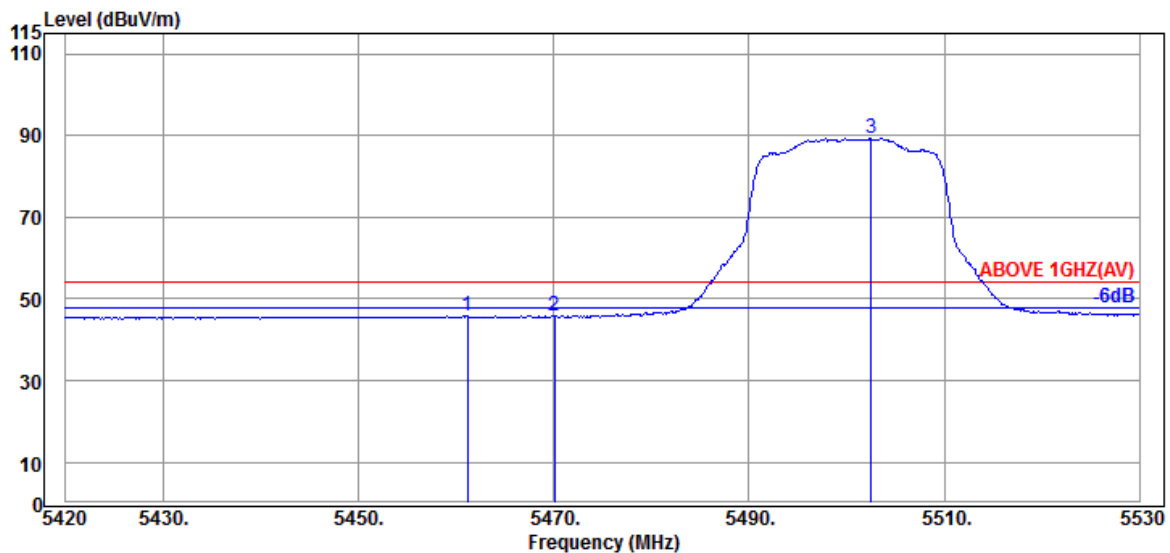

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.140	34.50	10.91	34.24	34.64	45.81	54.00	8.19	Average
5470.050	34.47	10.91	34.24	34.56	45.70	54.00	8.30	Average
@ 5502.500	34.40	10.93	34.24	78.19	89.28	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

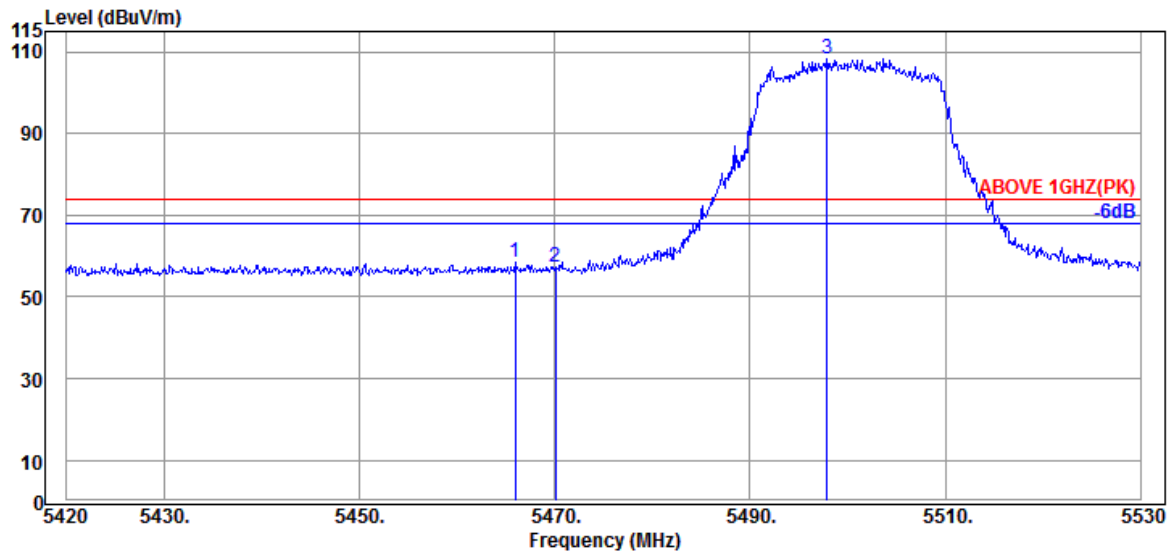

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.980	34.47	10.91	34.24	47.29	58.43	74.00	15.57	Peak
5470.050	34.47	10.91	34.24	46.19	57.33	74.00	16.67	Peak
@ 5497.880	34.40	10.93	34.23	97.04	108.14	---	---	Peak

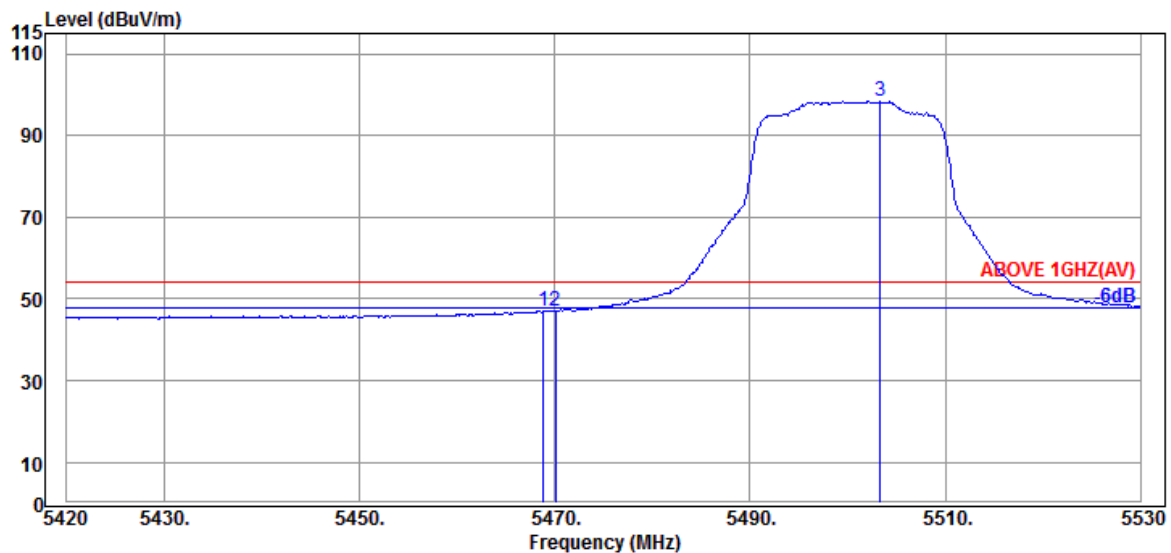

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.840	34.47	10.91	34.24	36.01	47.15	54.00	6.85	Average
5470.050	34.47	10.91	34.24	35.74	46.88	54.00	7.12	Average
@ 5503.380	34.40	10.93	34.24	87.20	98.29	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/62	Frequency	TX 5670MHz

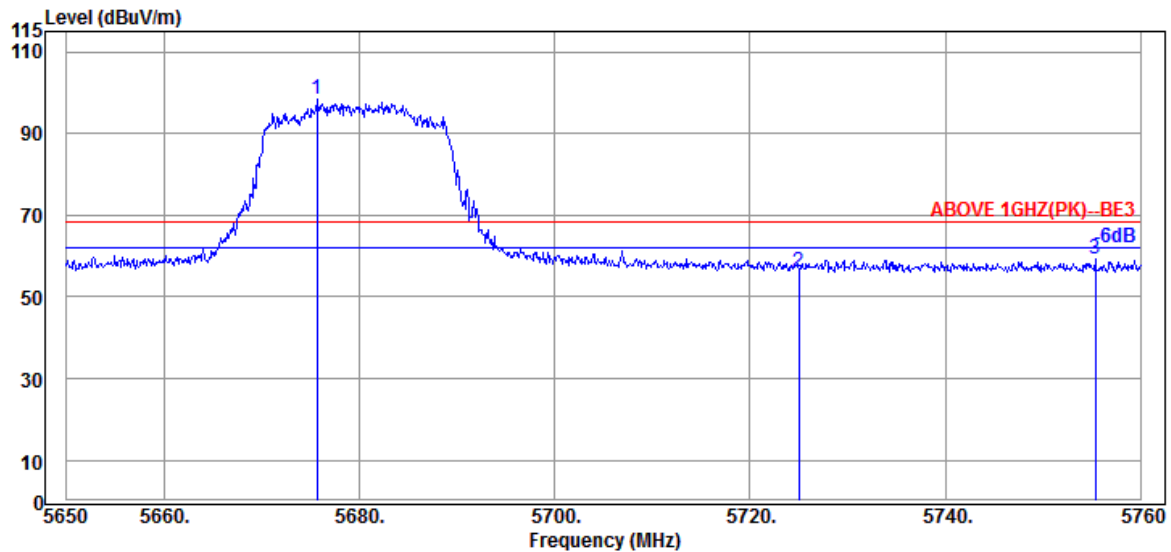

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5675.630	34.40	11.03	34.30	87.09	98.22	---	---	Peak
	5725.020	34.67	11.05	34.32	44.84	56.24	68.20	11.96	Peak
	5755.380	34.87	11.06	34.33	47.84	59.44	68.20	8.76	Peak

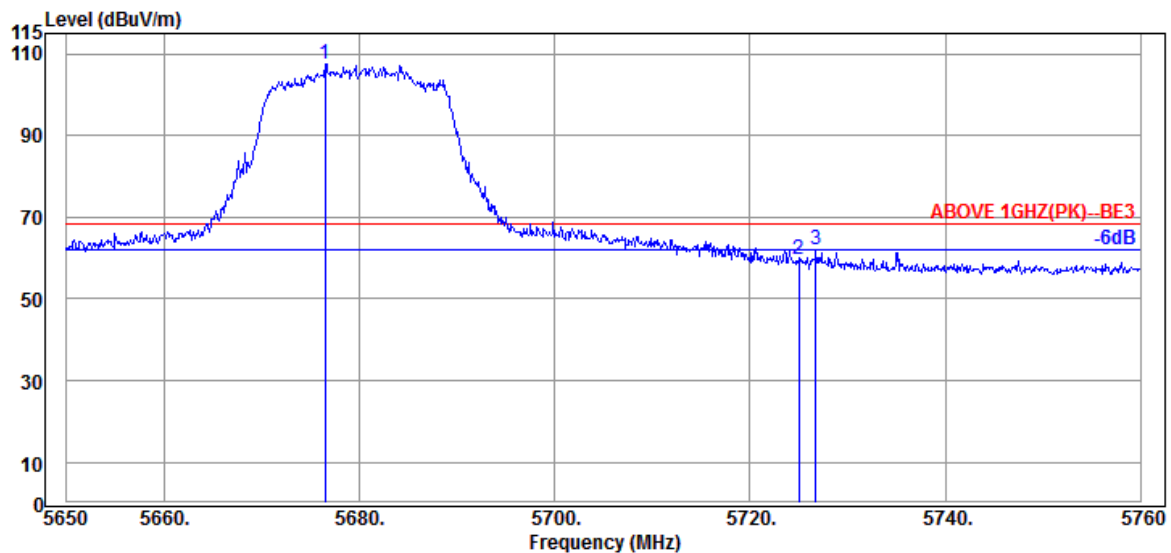

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5676.510	34.40	11.03	34.30	96.38	107.51	---	---	Peak
	5725.020	34.67	11.05	34.32	48.16	59.56	68.20	8.64	Peak
	5726.780	34.67	11.05	34.32	50.74	62.14	68.20	6.06	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,


New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	III
RU Configuration	242/61	Frequency	TX 5755MHz

Antenna at Horizontal Polarization

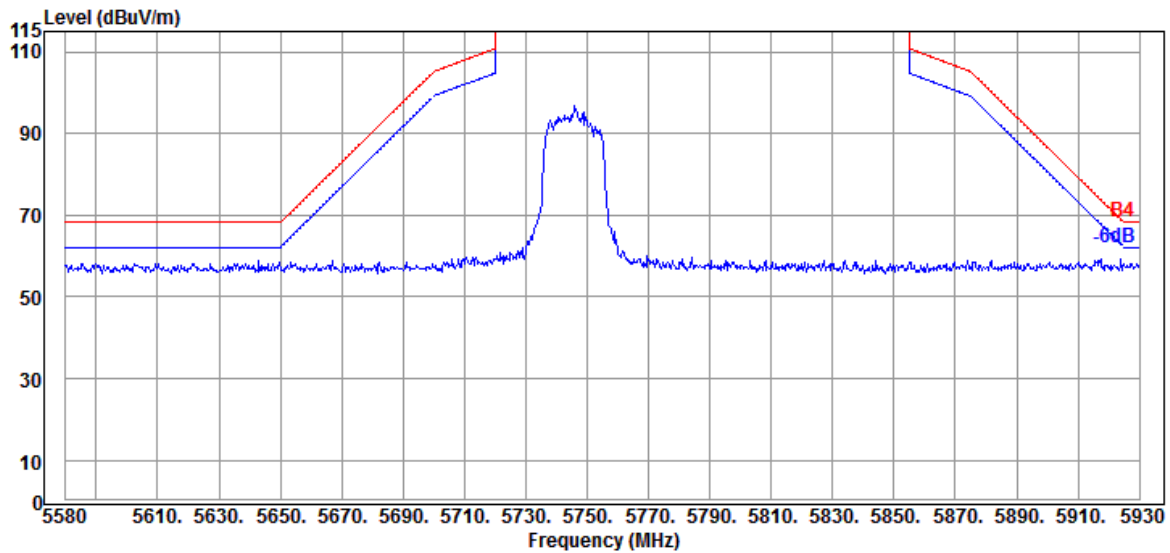

Antenna at Vertical Polarization

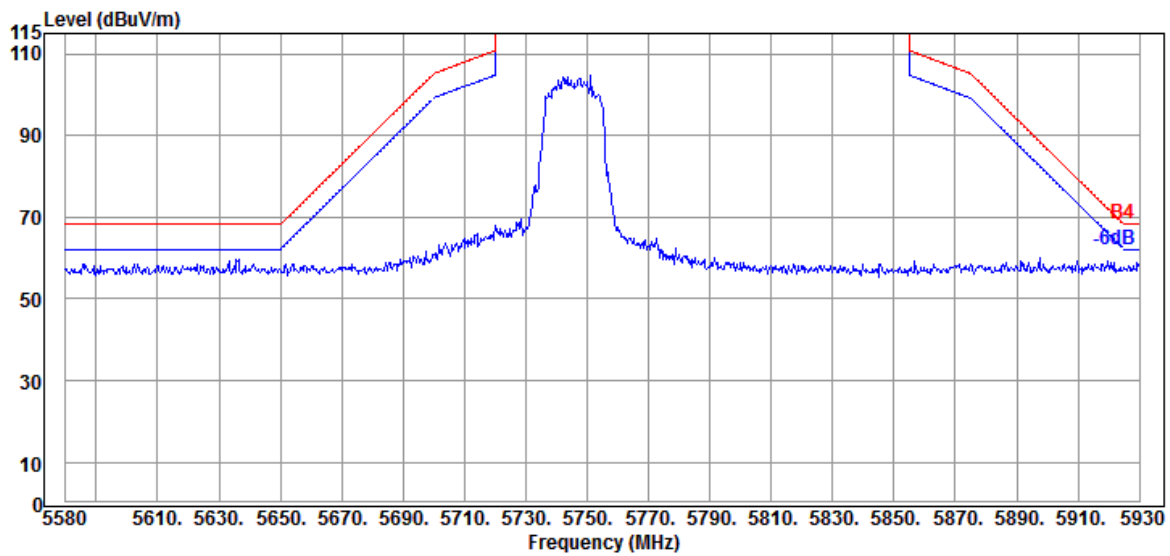

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,


New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	III
RU Configuration	242/62	Frequency	TX 5795MHz

Antenna at Horizontal Polarization

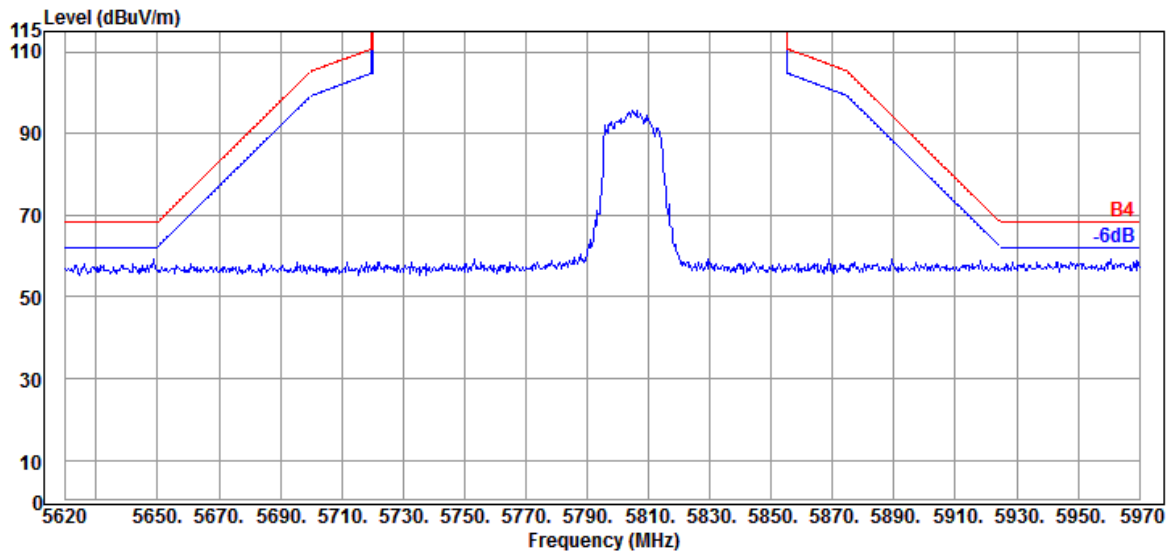

Antenna at Vertical Polarization

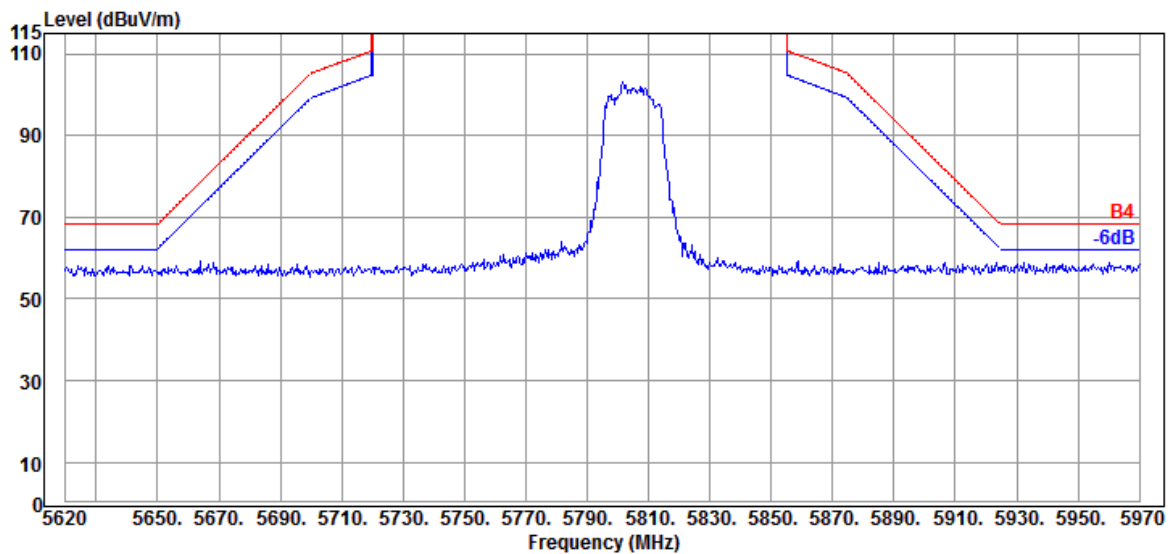

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	I
RU Configuration	484/65	Frequency	TX 5210MHz

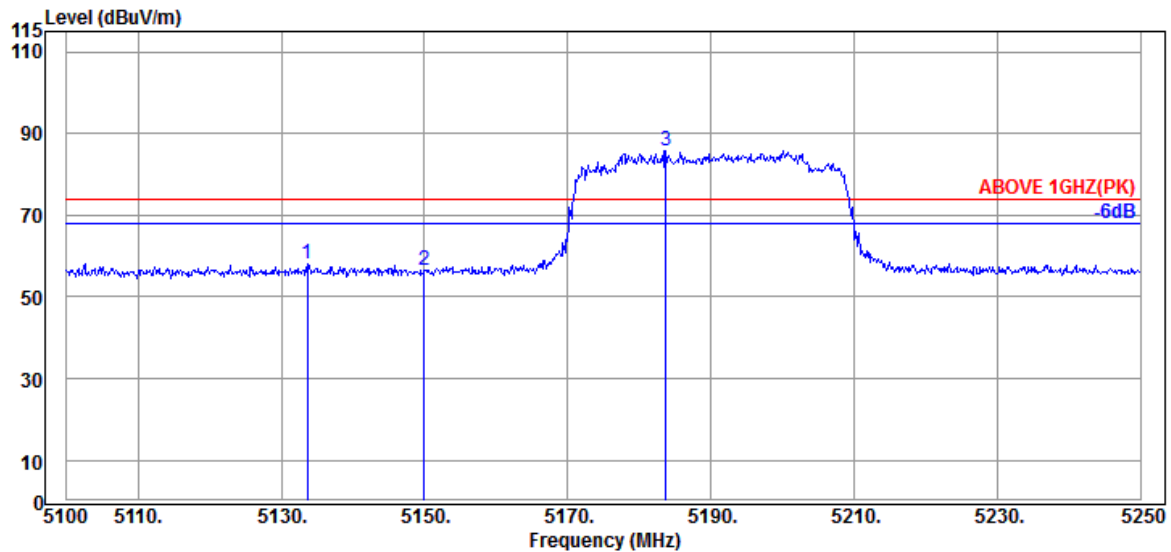

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5133.600	34.17	10.70	34.36	47.47	57.98	74.00	16.02	Peak
5149.950	34.20	10.70	34.35	45.79	56.34	74.00	17.66	Peak
@ 5183.700	34.20	10.72	34.34	75.33	85.91	---	---	Peak

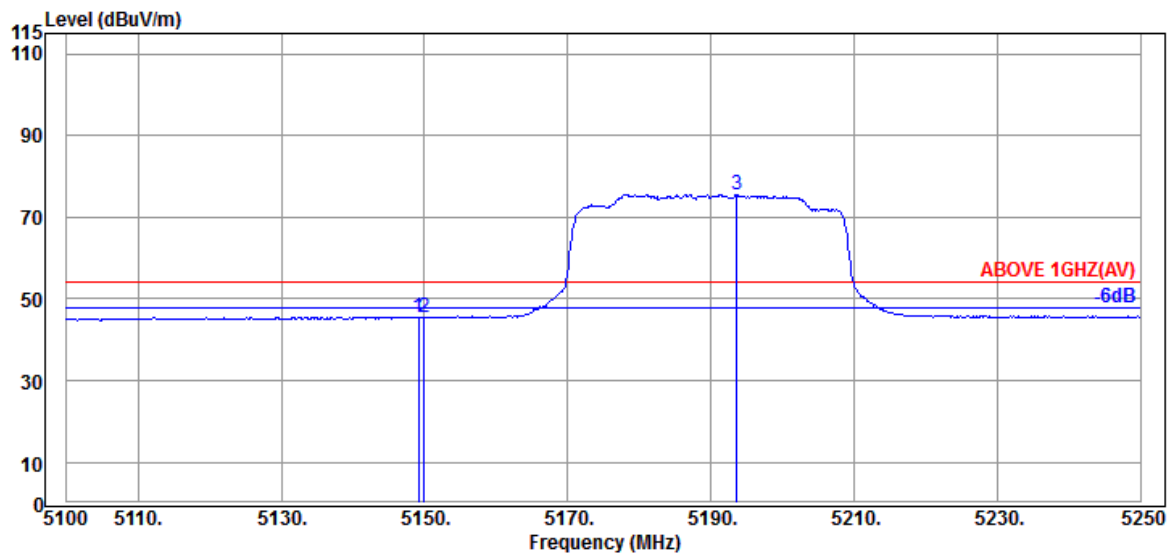

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	34.20	10.70	34.35	35.03	45.58	54.00	8.42	Average
5149.950	34.20	10.70	34.35	34.86	45.41	54.00	8.59	Average
@ 5193.600	34.20	10.74	34.34	65.07	75.67	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ax-HE80	U-NII Band	I
RU Configuration	484/65	Frequency	TX 5210MHz

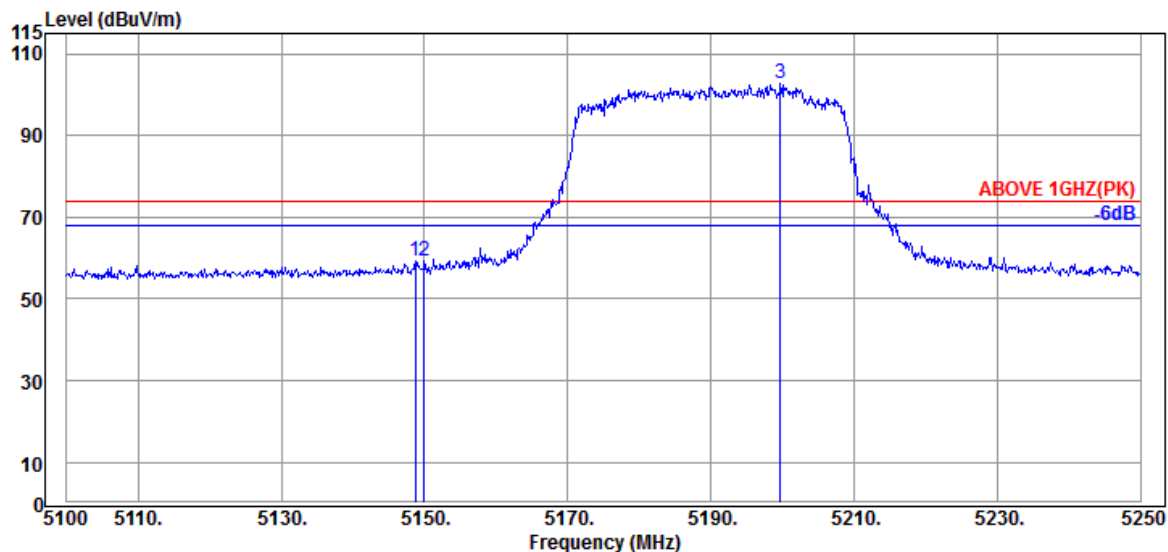

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.750	34.20	10.70	34.35	48.88	59.43	74.00	14.57	Peak
5149.950	34.20	10.70	34.35	48.68	59.23	74.00	14.77	Peak
@ 5199.750	34.20	10.74	34.33	92.07	102.68	---	---	Peak

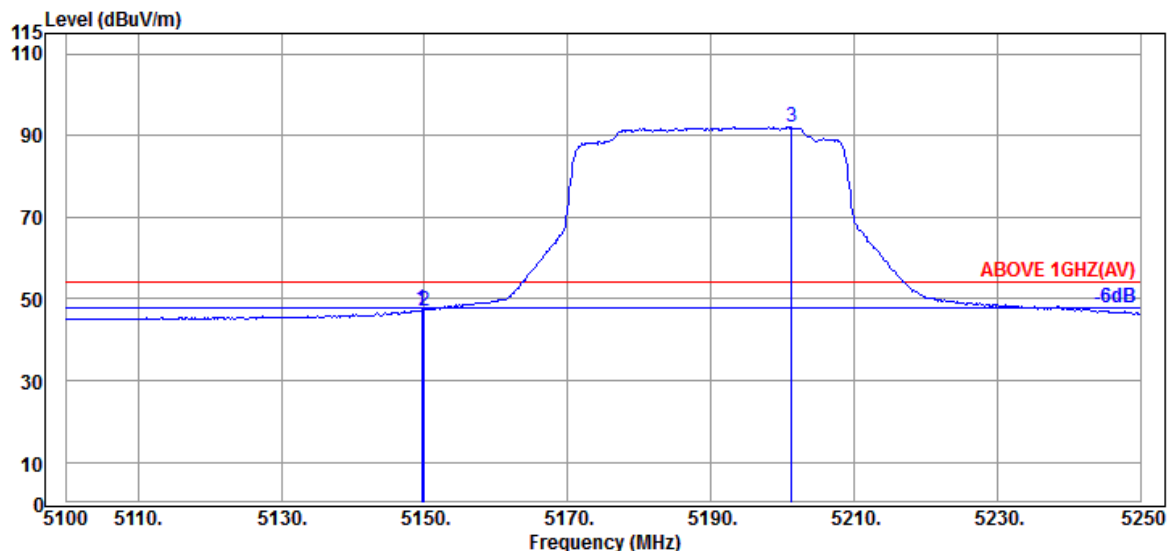

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.650	34.20	10.70	34.35	36.94	47.49	54.00	6.51	Average
5149.950	34.20	10.70	34.35	36.64	47.19	54.00	6.81	Average
@ 5201.250	34.20	10.74	34.33	81.39	92.00	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2A
RU Configuration	484/66	Frequency	TX 5290MHz

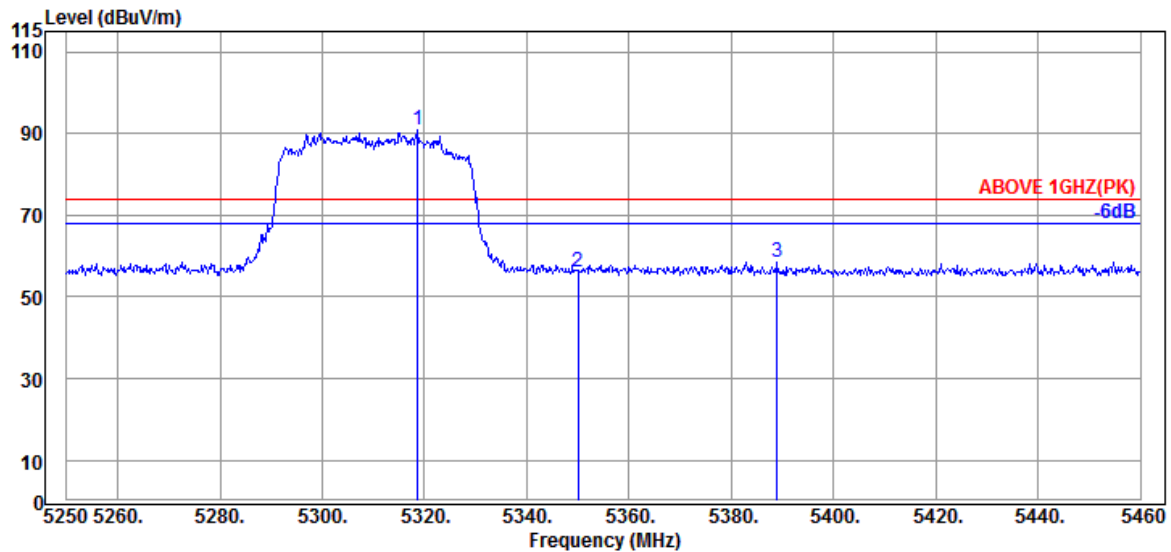

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.670	34.53	10.81	34.29	79.67	90.72	---	---	Peak
5349.960	34.60	10.83	34.27	45.15	56.31	74.00	17.69	Peak
5389.020	34.70	10.85	34.27	47.30	58.58	74.00	15.42	Peak

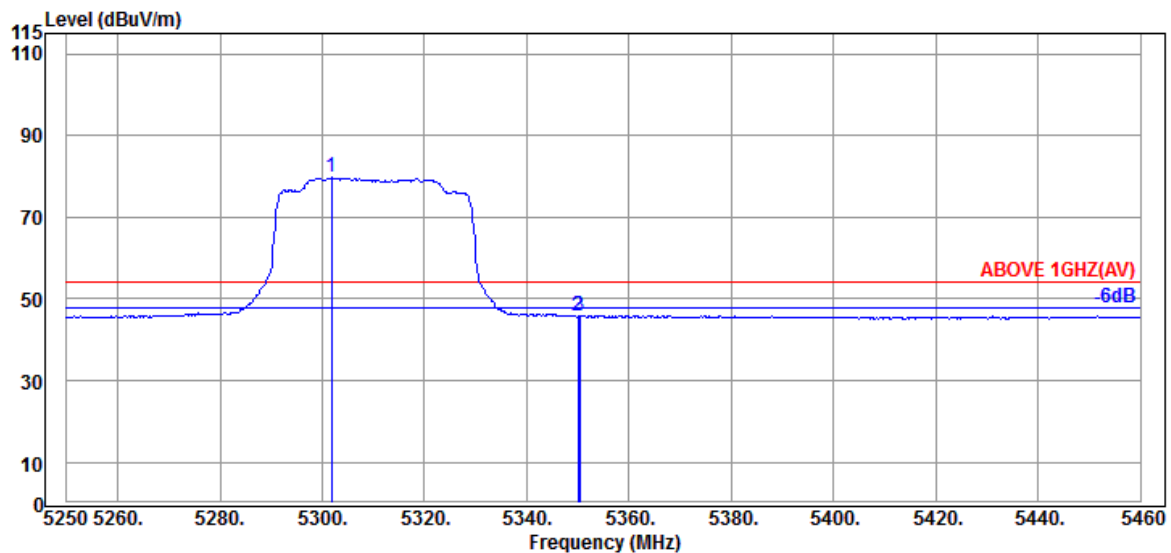

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.870	34.50	10.81	34.29	68.69	79.71	---	---	Average
5349.960	34.60	10.83	34.27	34.73	45.89	54.00	8.11	Average
5350.380	34.60	10.83	34.27	34.71	45.87	54.00	8.13	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2A
RU Configuration	484/66	Frequency	TX 5290MHz

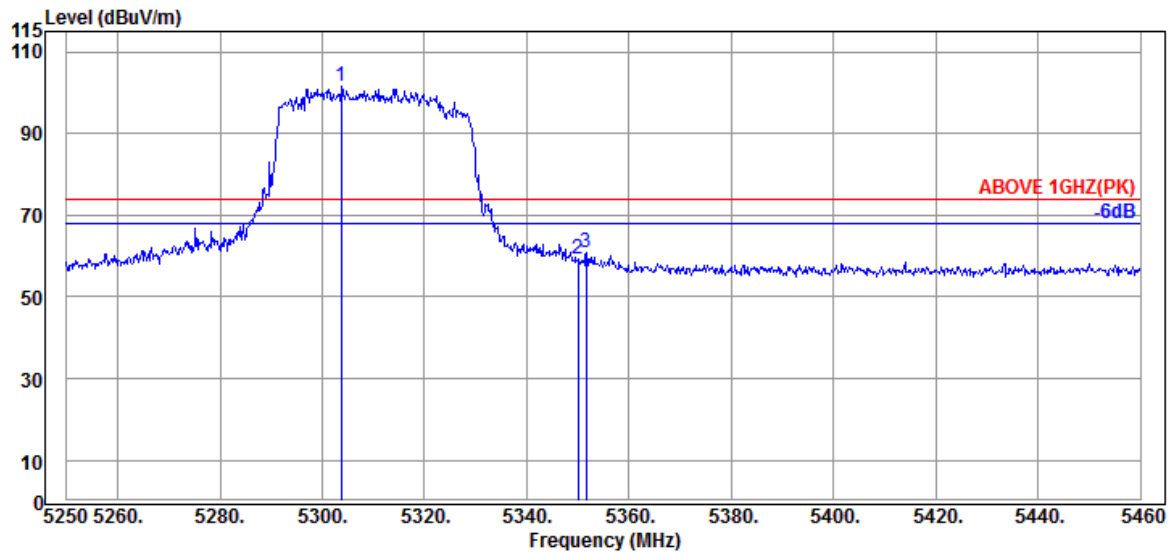

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5303.760	34.50	10.81	34.29	90.49	101.51	---	---	Peak
5349.960	34.60	10.83	34.27	48.30	59.46	74.00	14.54	Peak
5351.640	34.60	10.83	34.27	49.57	60.73	74.00	13.27	Peak

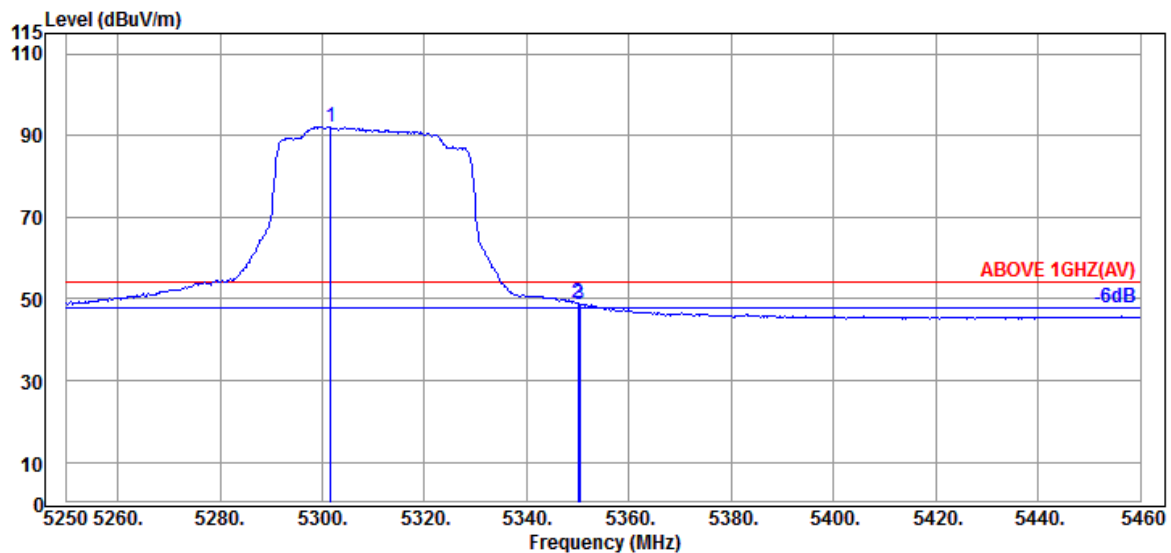

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.660	34.50	10.81	34.29	81.14	92.16	---	---	Average
5349.960	34.60	10.83	34.27	37.76	48.92	54.00	5.08	Average
5350.380	34.60	10.83	34.27	37.47	48.63	54.00	5.37	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

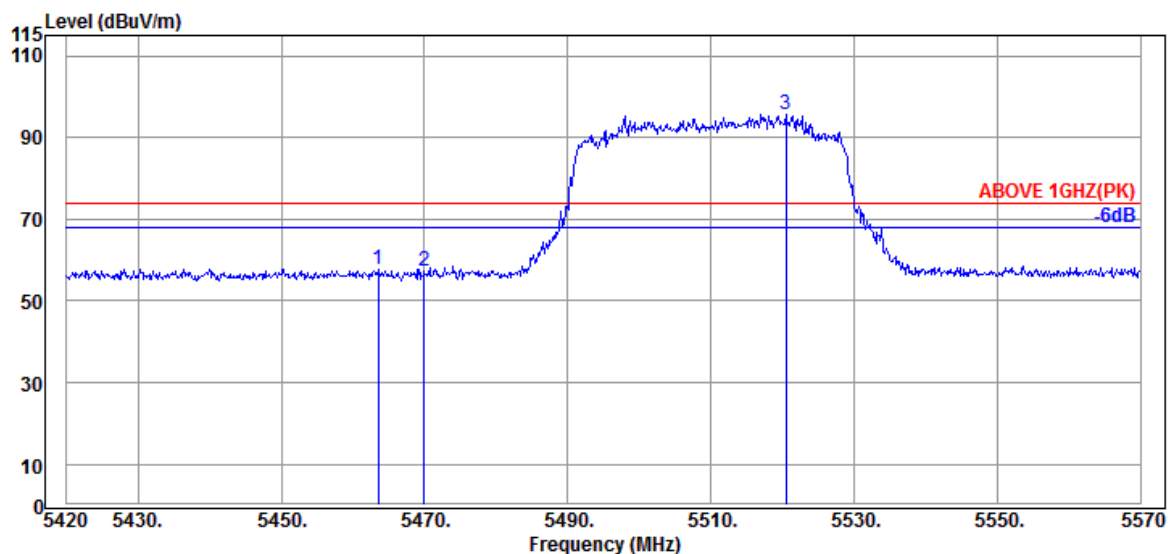

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.500	34.50	10.91	34.24	46.57	57.74	74.00	16.26	Peak
5469.950	34.47	10.91	34.24	46.34	57.48	74.00	16.52	Peak
@ 5520.500	34.37	10.93	34.24	84.73	95.79	---	---	Peak

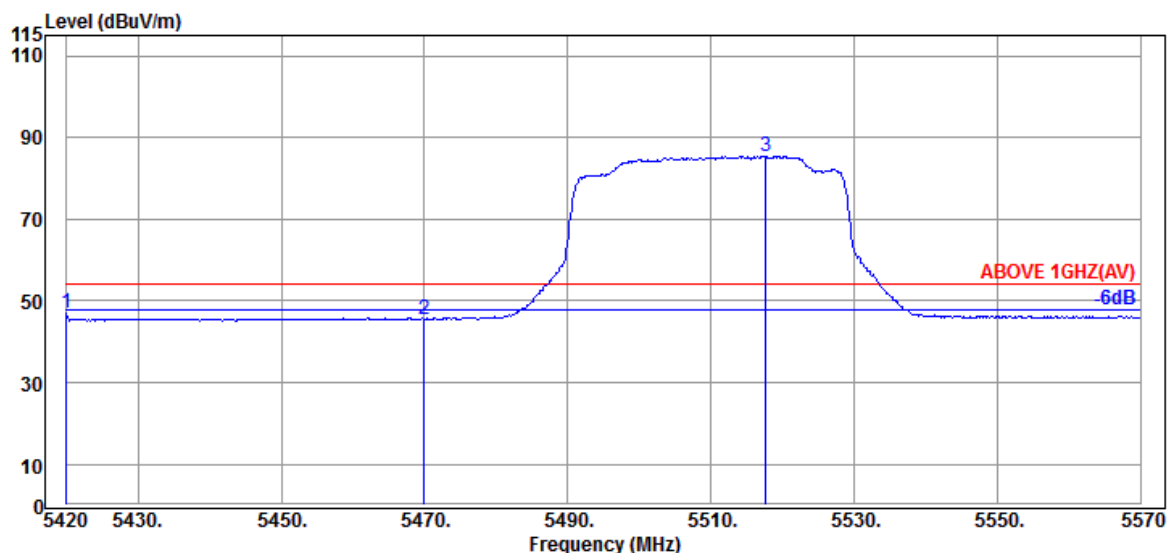

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5420.000	34.60	10.87	34.26	35.97	47.18	54.00	6.82	Average
5469.950	34.47	10.91	34.24	34.36	45.50	54.00	8.50	Average
@ 5517.650	34.37	10.93	34.24	74.48	85.54	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

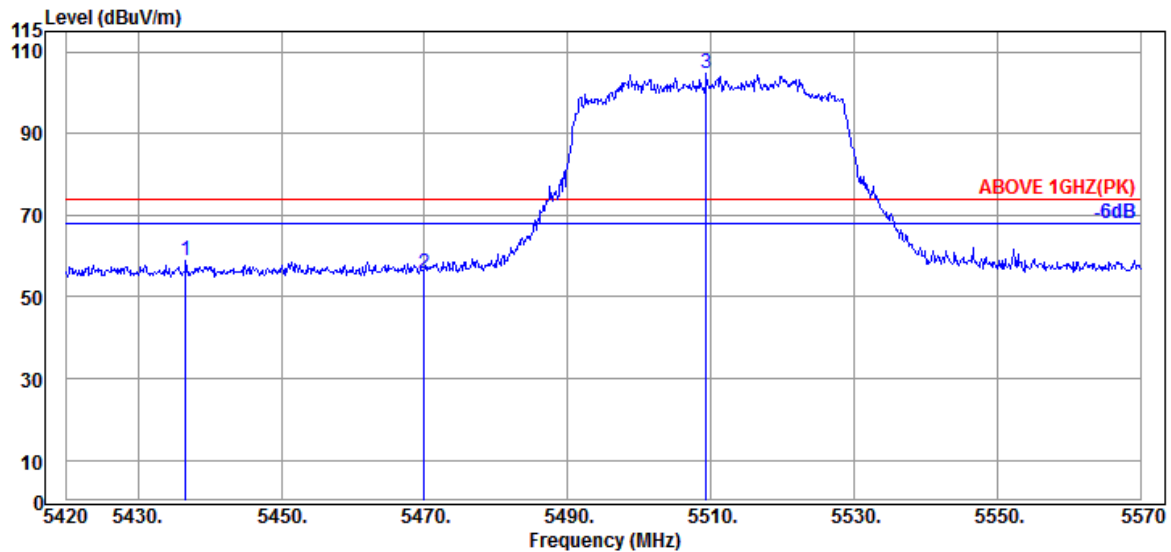

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5436.650	34.55	10.89	34.25	47.59	58.78	74.00	15.22	Peak
5469.950	34.47	10.91	34.24	44.64	55.78	74.00	18.22	Peak
@ 5509.400	34.40	10.93	34.24	93.73	104.82	---	---	Peak

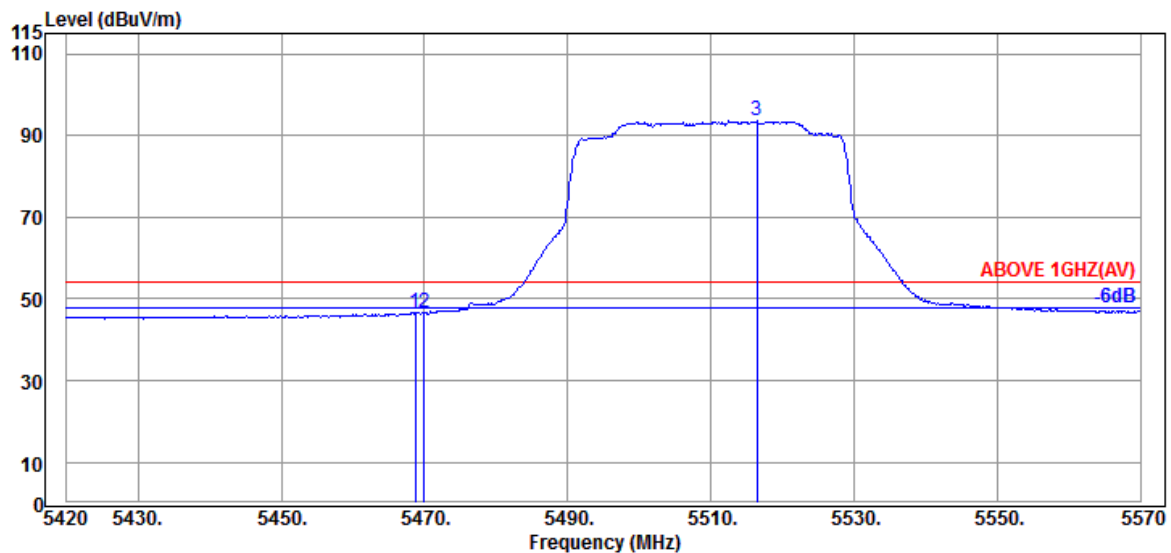

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.750	34.47	10.91	34.24	35.54	46.68	54.00	7.32	Average
5469.950	34.47	10.91	34.24	35.51	46.65	54.00	7.35	Average
@ 5516.450	34.37	10.93	34.24	82.51	93.57	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/66	Frequency	TX 5610MHz

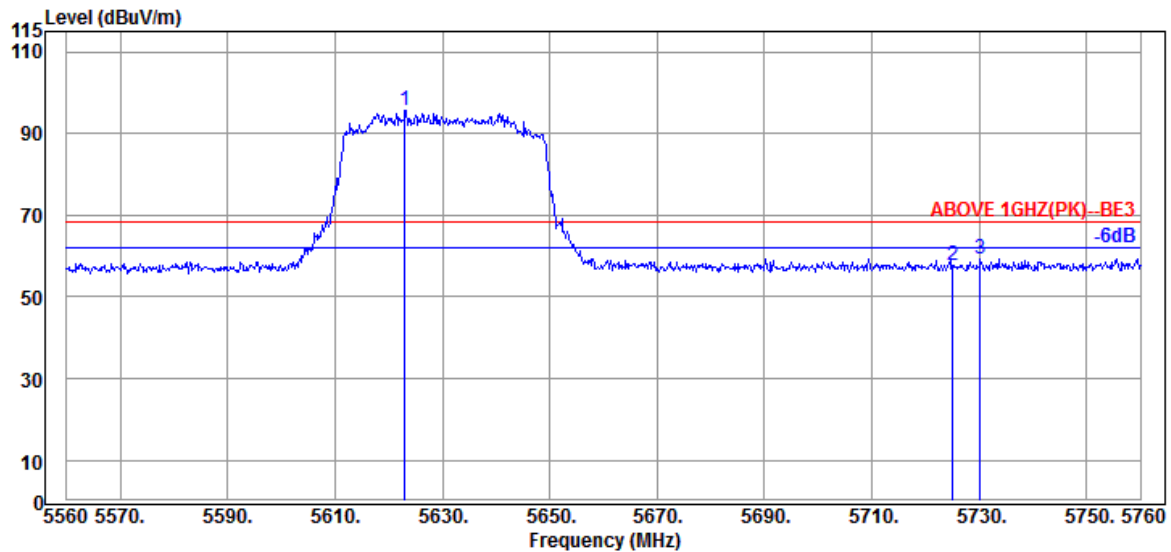

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5623.000	34.40	10.99	34.28	84.64	95.75	---	---	Peak
	5725.000	34.67	11.05	34.32	46.27	57.67	68.20	10.53	Peak
	5730.200	34.67	11.05	34.32	47.97	59.37	68.20	8.83	Peak

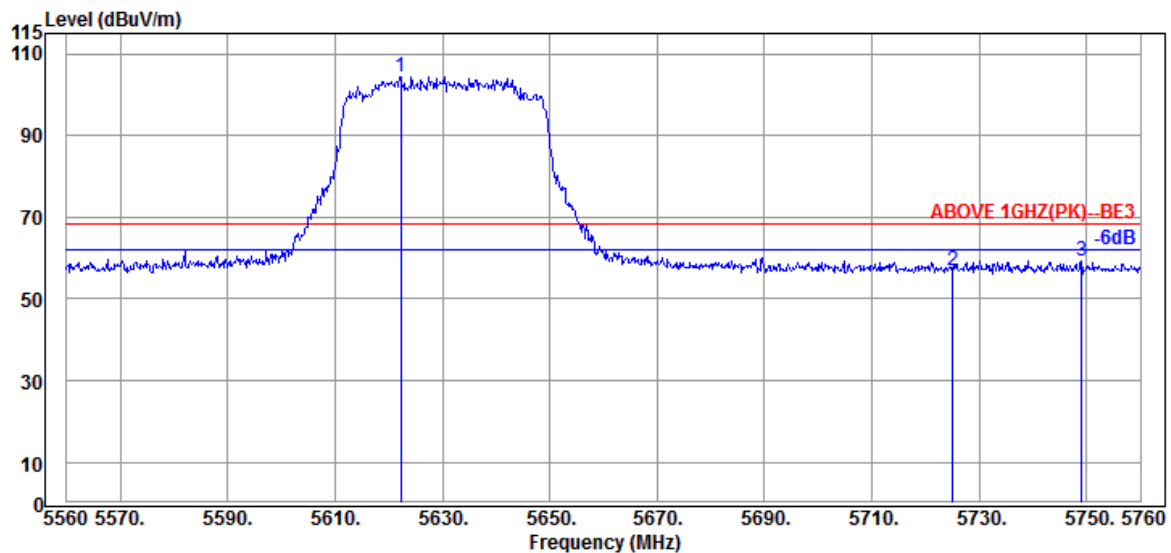

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5622.200	34.40	10.99	34.28	93.41	104.52	---	---	Peak
	5725.000	34.67	11.05	34.32	45.43	56.83	68.20	11.37	Peak
	5749.000	34.80	11.06	34.33	47.69	59.22	68.20	8.98	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,


New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	III
RU Configuration	484/65	Frequency	TX 5775MHz

Antenna at Horizontal Polarization

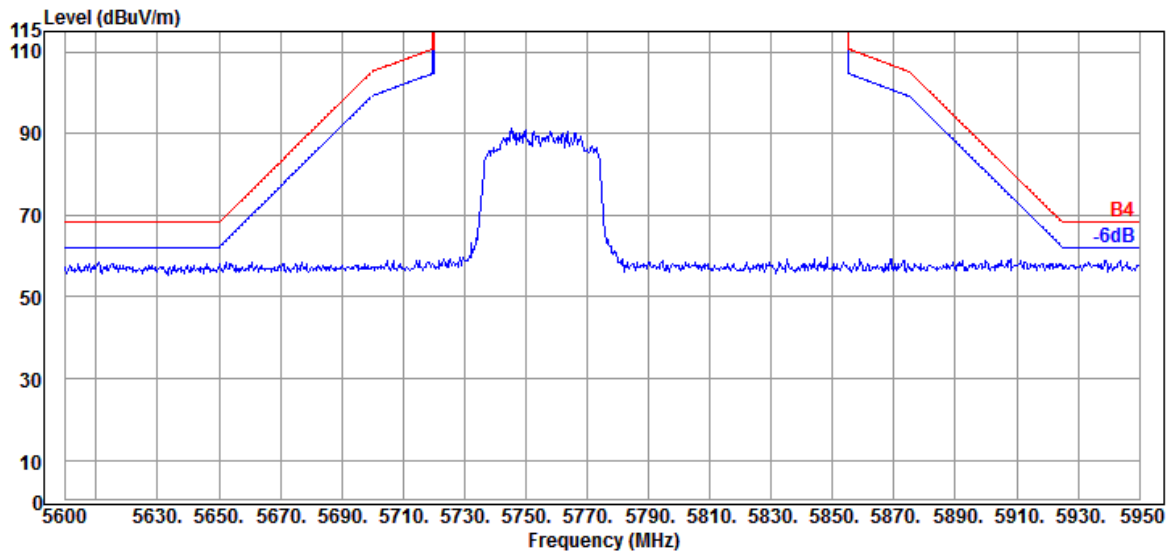

Antenna at Vertical Polarization

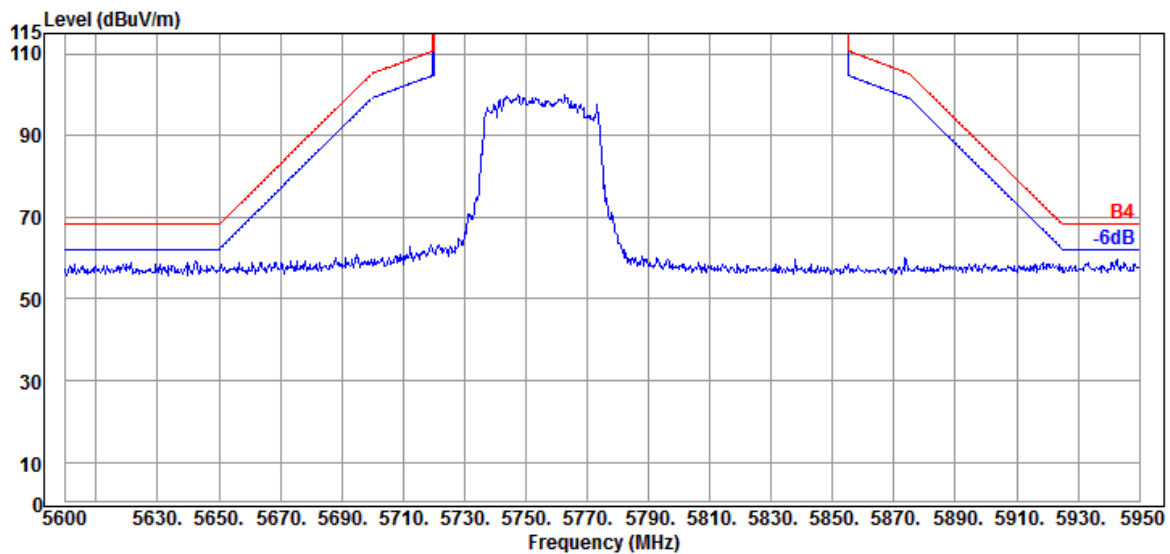

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,


New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	III
RU Configuration	484/66	Frequency	TX 5775MHz

Antenna at Horizontal Polarization

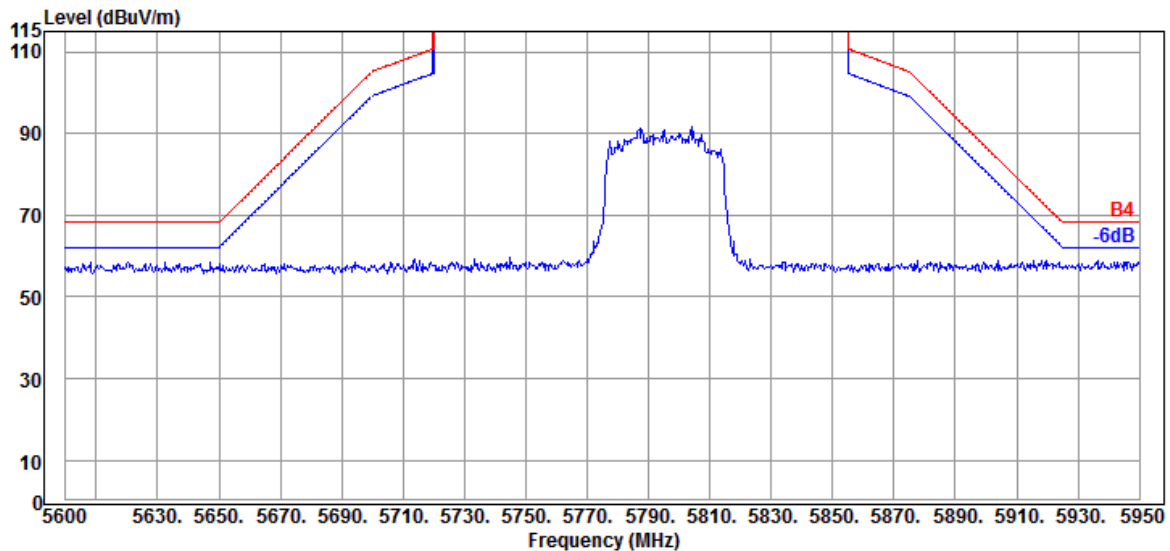

Antenna at Vertical Polarization

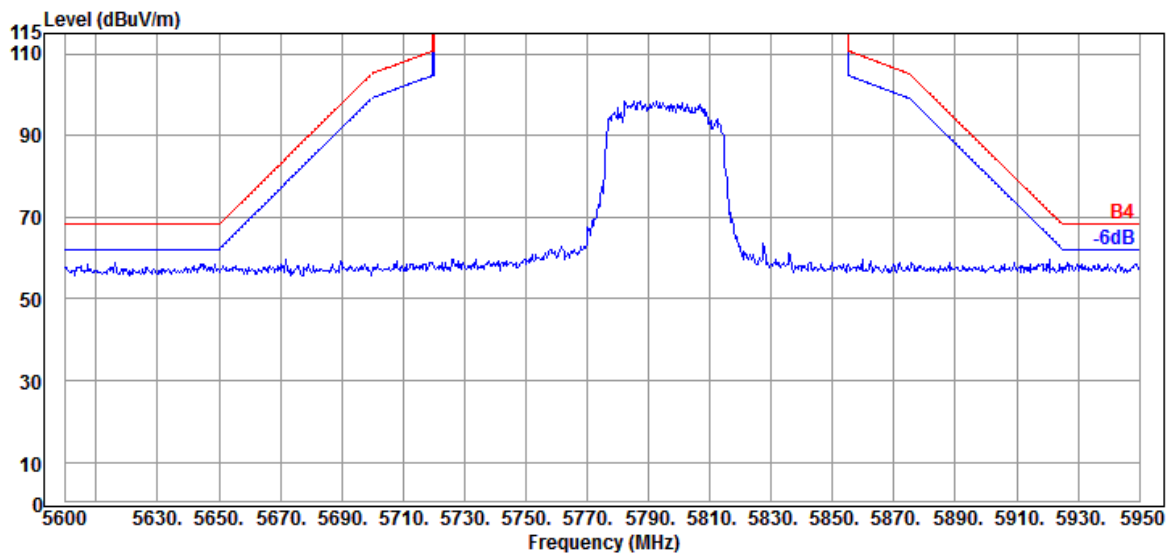

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	I & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

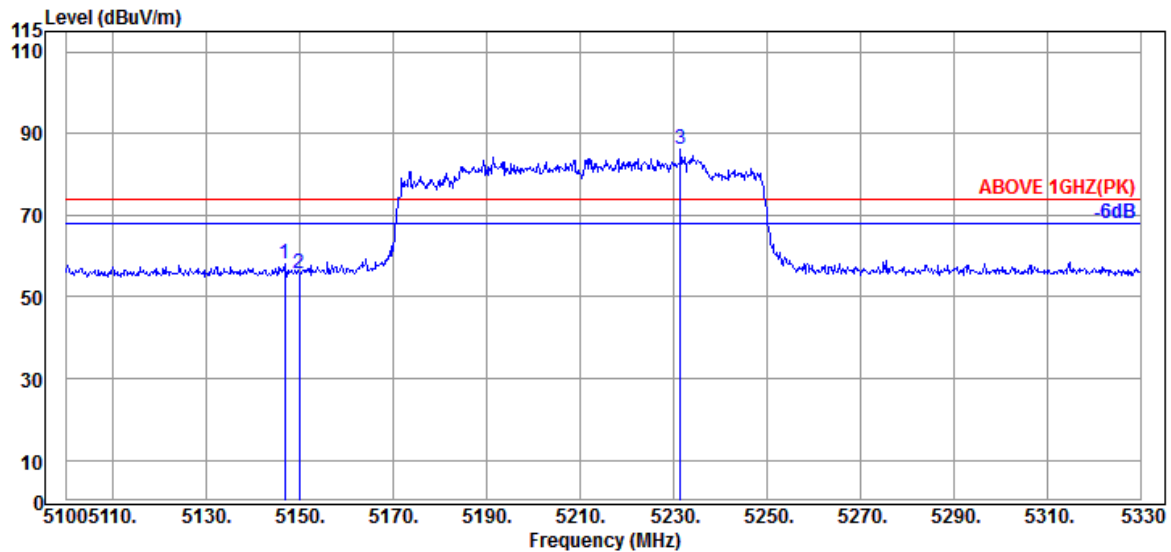

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.690	34.20	10.70	34.35	47.59	58.14	74.00	15.86	Peak
5149.910	34.20	10.70	34.35	45.00	55.55	74.00	18.45	Peak
@ 5231.560	34.30	10.76	34.32	75.44	86.18	---	---	Peak

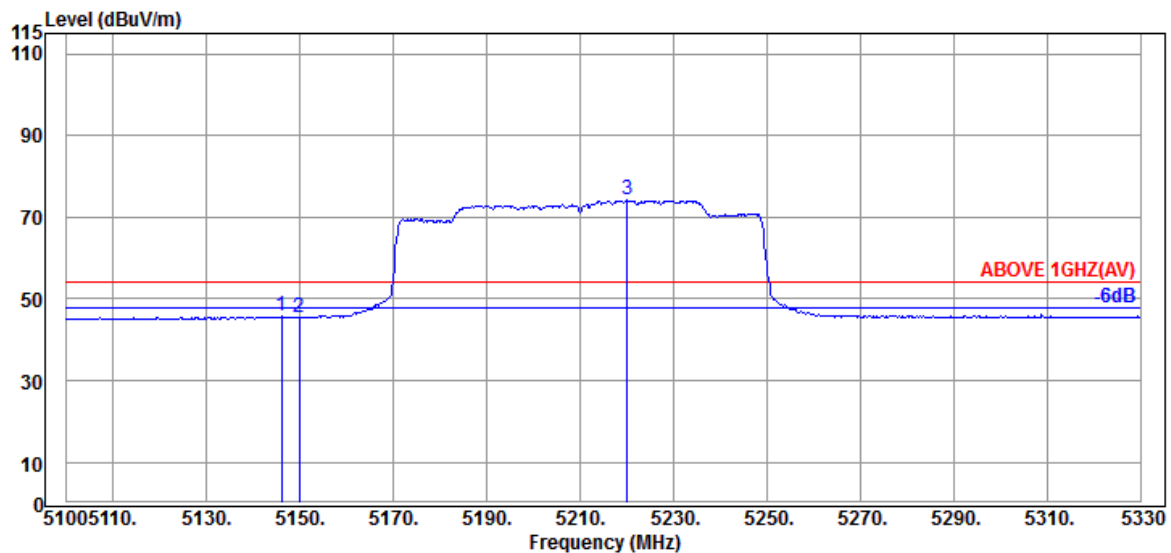

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.000	34.20	10.70	34.35	35.10	45.65	54.00	8.35	Average
5149.910	34.20	10.70	34.35	35.03	45.58	54.00	8.42	Average
@ 5220.060	34.30	10.74	34.33	63.39	74.10	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	I & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

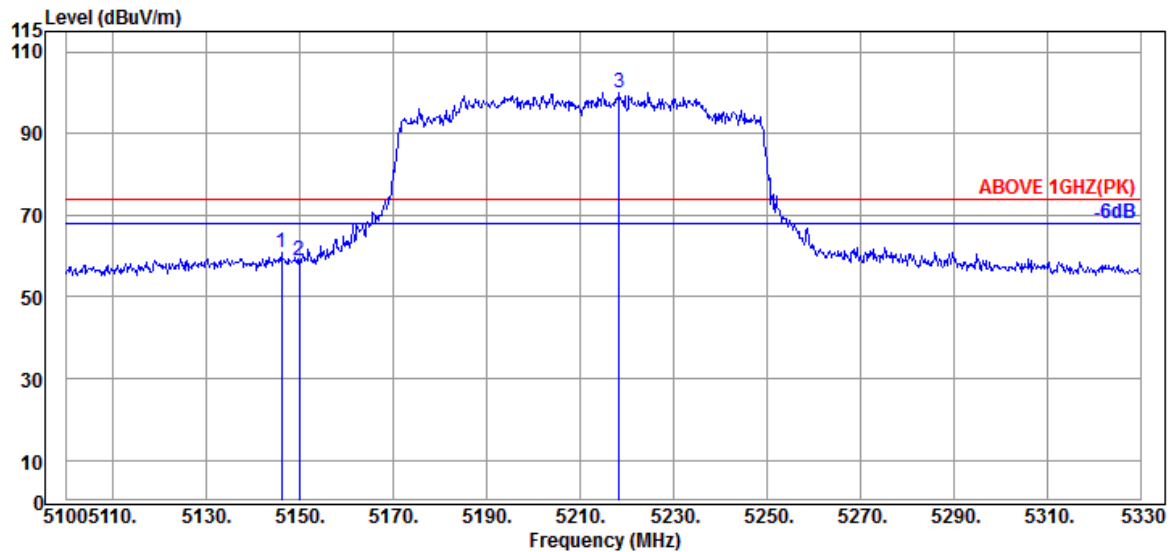

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.000	34.20	10.70	34.35	50.29	60.84	74.00	13.16	Peak
5149.910	34.20	10.70	34.35	48.48	59.03	74.00	14.97	Peak
@ 5218.450	34.30	10.74	34.33	89.38	100.09	---	---	Peak

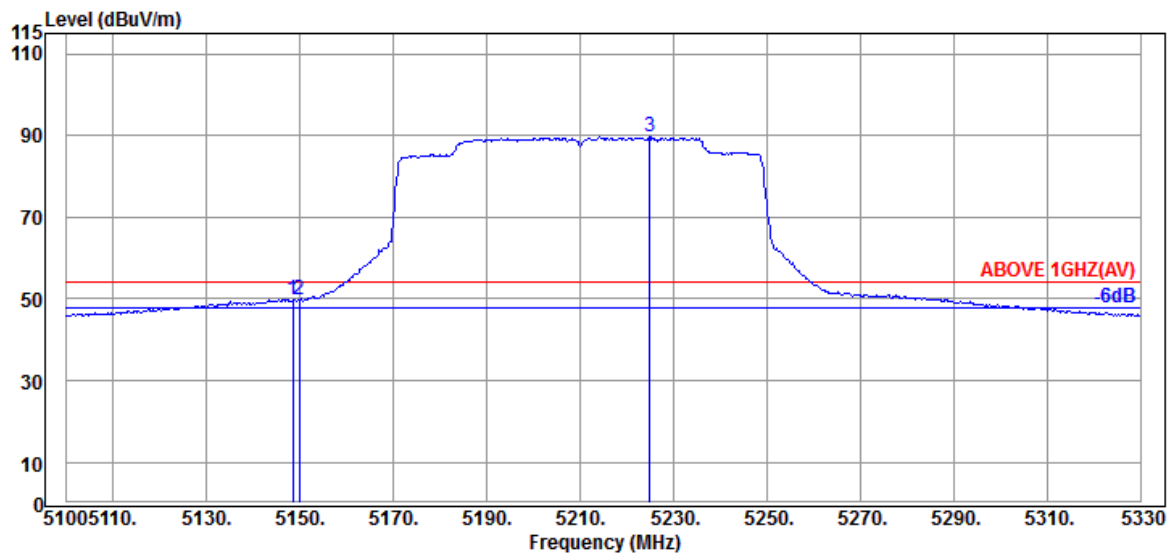

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.530	34.20	10.70	34.35	39.37	49.92	54.00	4.08	Average
5149.910	34.20	10.70	34.35	39.11	49.66	54.00	4.34	Average
@ 5224.890	34.30	10.76	34.32	78.90	89.64	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	I & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

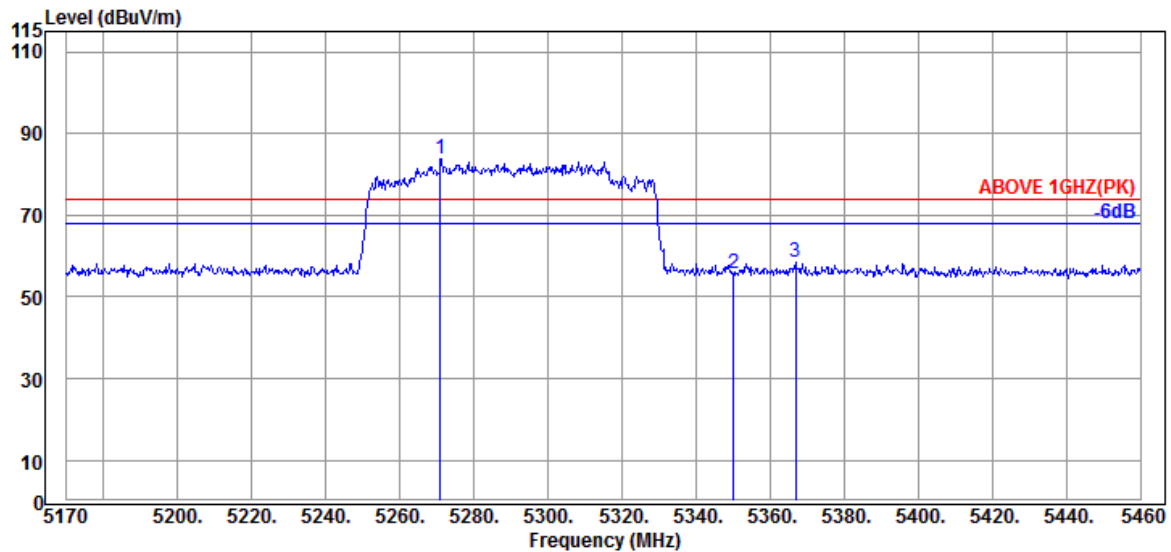

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5270.920	34.43	10.79	34.31	72.89	83.80	---	---	Peak
	5350.090	34.60	10.83	34.27	44.63	55.79	74.00	18.21	Peak
	5366.910	34.63	10.85	34.27	47.10	58.31	74.00	15.69	Peak

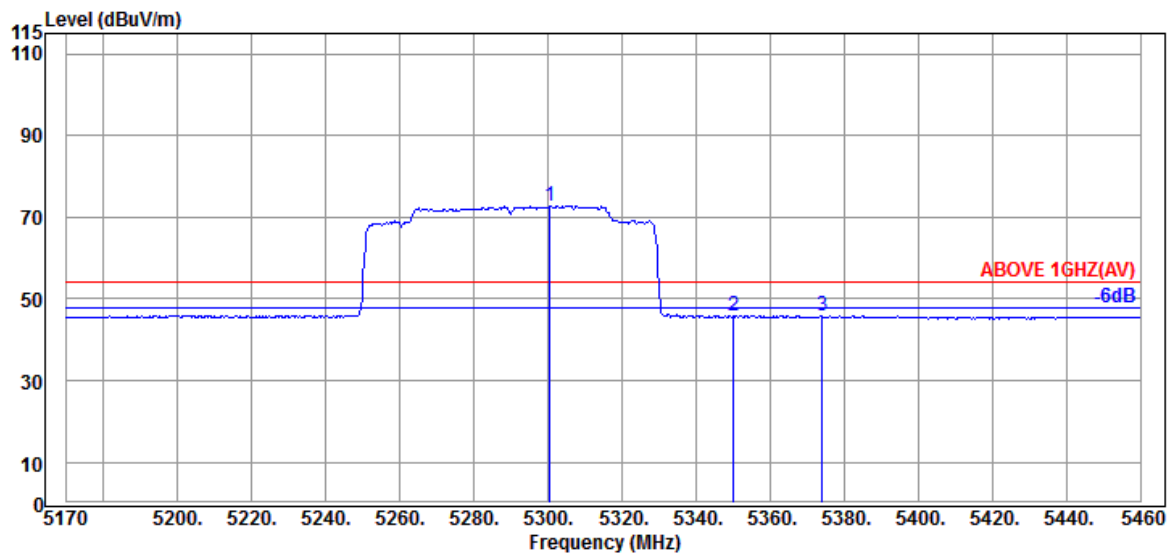

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5300.500	34.50	10.81	34.29	61.70	72.72	---	---	Average
	5350.090	34.60	10.83	34.27	34.70	45.86	54.00	8.14	Average
	5374.160	34.67	10.85	34.27	34.64	45.89	54.00	8.11	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	I & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

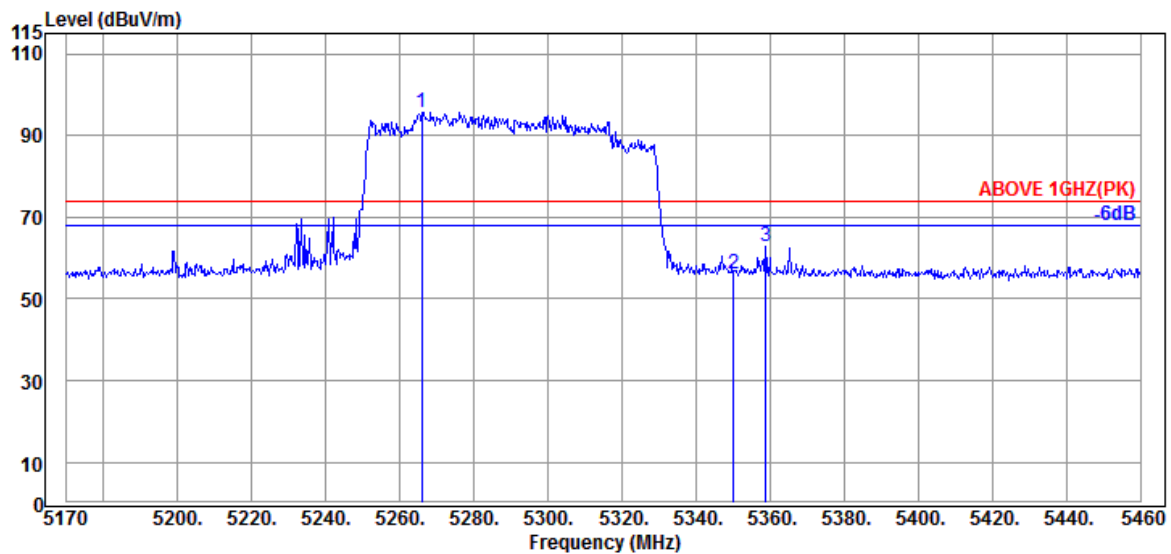

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5265.990	34.43	10.79	34.31	84.90	95.81	---	---	Peak
	5350.090	34.60	10.83	34.27	44.78	55.94	74.00	18.06	Peak
	5358.790	34.63	10.85	34.27	51.67	62.88	74.00	11.12	Peak

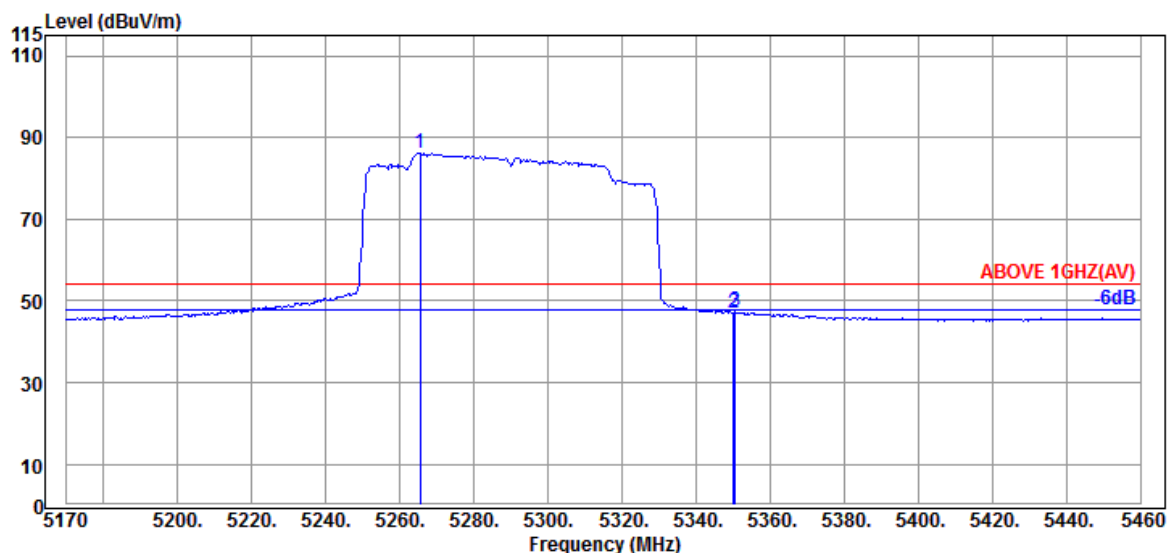

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5265.410	34.43	10.79	34.31	75.37	86.28	---	---	Average
	5350.090	34.60	10.83	34.27	35.86	47.02	54.00	6.98	Average
	5350.670	34.60	10.83	34.27	36.12	47.28	54.00	6.72	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

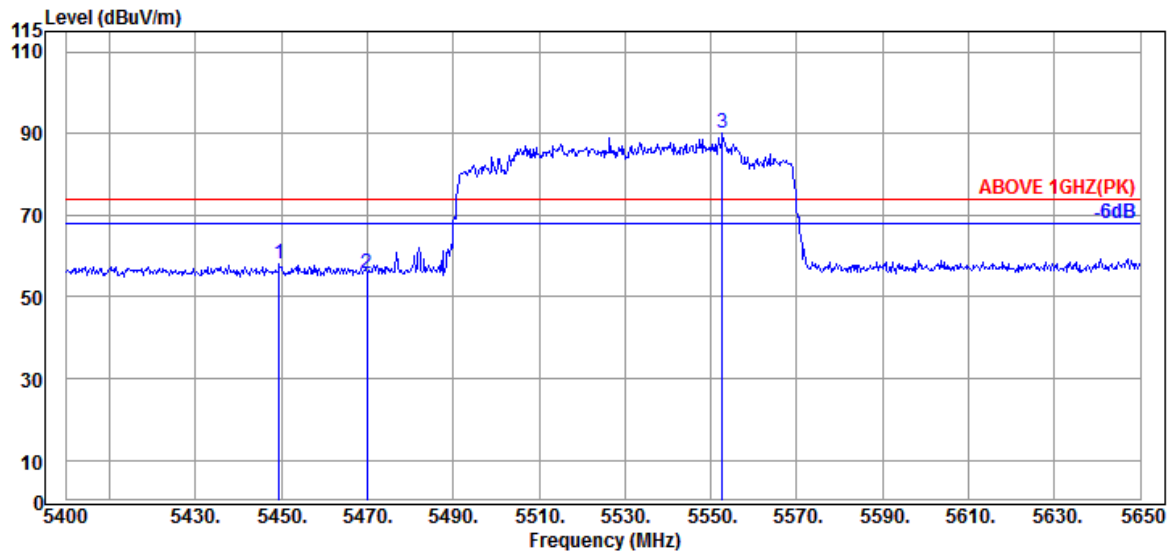

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5449.500	34.50	10.89	34.25	46.81	57.95	74.00	16.05	Peak
5470.000	34.47	10.91	34.24	44.58	55.72	74.00	18.28	Peak
@ 5552.750	34.30	10.95	34.26	78.92	89.91	---	---	Peak

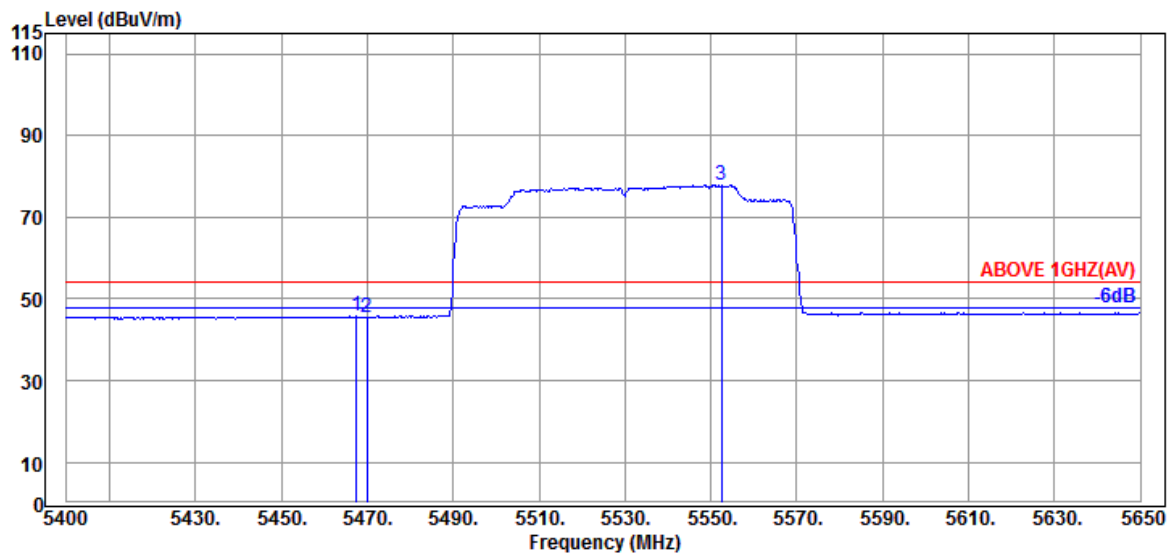

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.500	34.47	10.91	34.24	34.64	45.78	54.00	8.22	Average
5470.000	34.47	10.91	34.24	34.50	45.64	54.00	8.36	Average
@ 5552.500	34.30	10.95	34.26	66.85	77.84	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

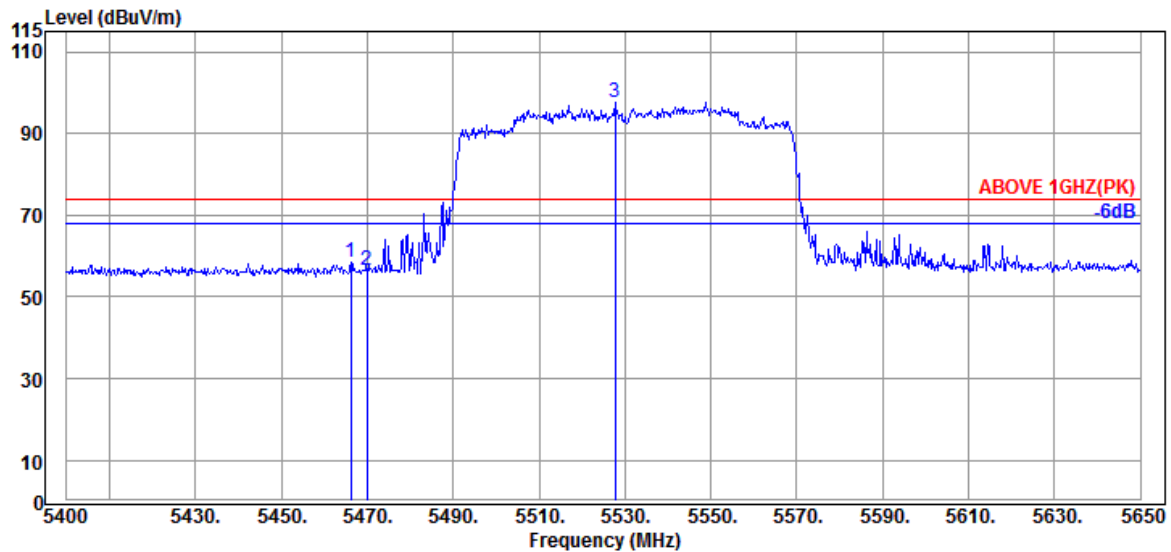

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.250	34.47	10.91	34.24	47.37	58.51	74.00	15.49	Peak
5470.000	34.47	10.91	34.24	45.43	56.57	74.00	17.43	Peak
@ 5527.750	34.33	10.93	34.25	86.49	97.50	---	---	Peak

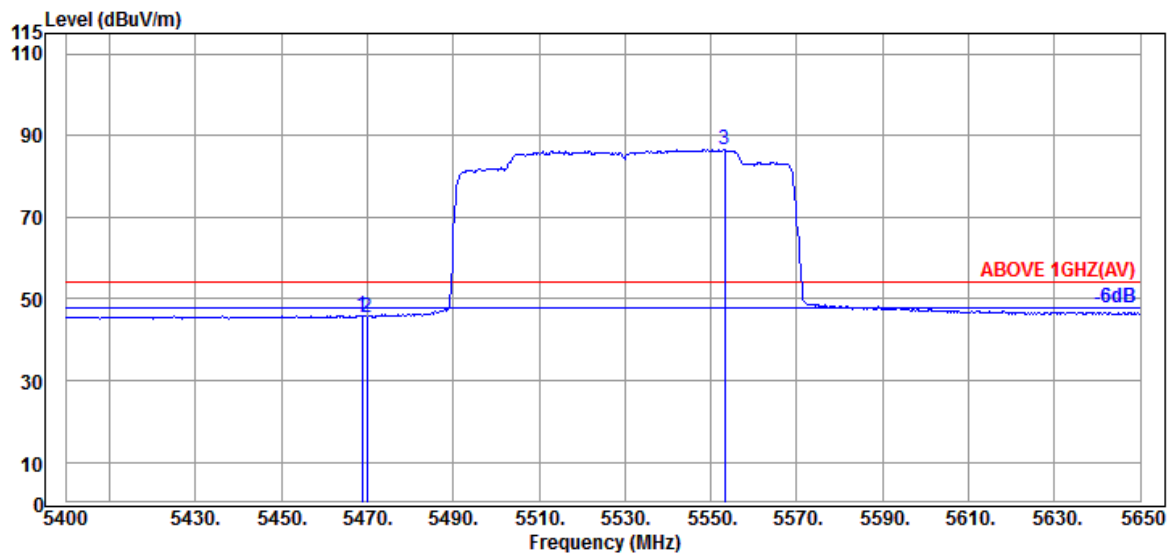

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.750	34.47	10.91	34.24	34.88	46.02	54.00	7.98	Average
5470.000	34.47	10.91	34.24	34.50	45.64	54.00	8.36	Average
@ 5553.250	34.30	10.95	34.26	75.52	86.51	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/S67	Frequency	TX 5570MHz

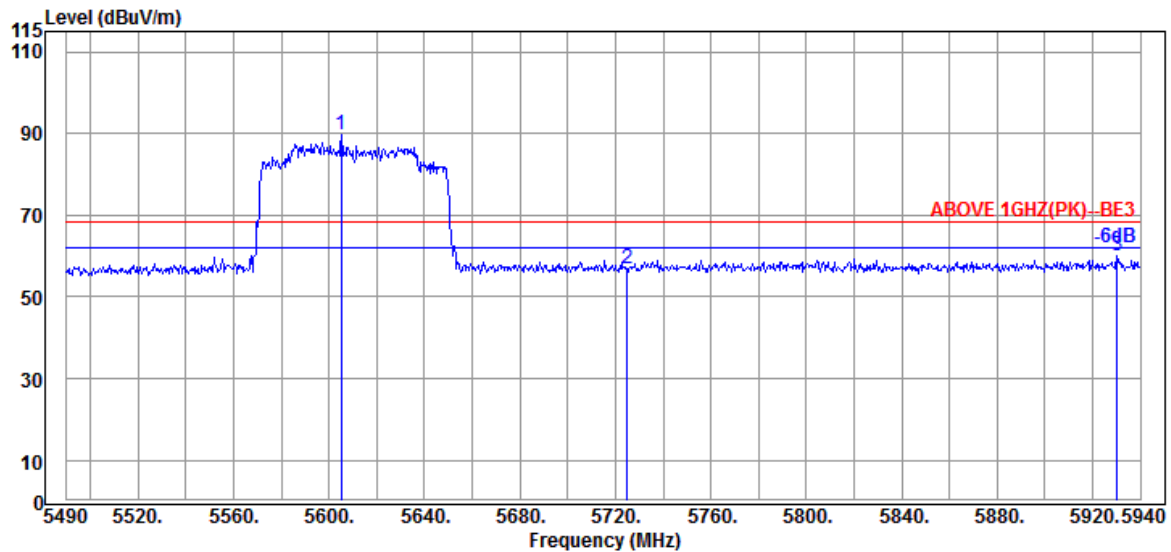

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5605.200	34.40	10.99	34.28	78.44	89.55	---	---	Peak
5724.900	34.67	11.05	34.32	45.33	56.73	68.20	11.47	Peak
5930.100	35.33	11.14	34.41	47.83	59.89	68.20	8.31	Peak

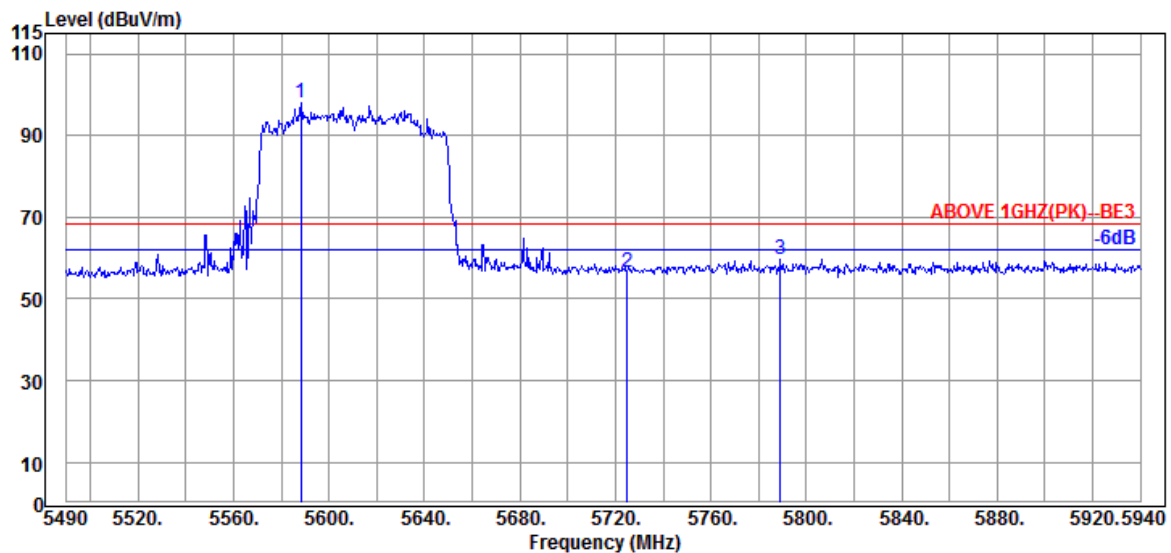

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5588.100	34.37	10.97	34.27	86.87	97.94	---	---	Peak
5724.900	34.67	11.05	34.32	45.29	56.69	68.20	11.51	Peak
5789.250	35.00	11.08	34.36	48.04	59.76	68.20	8.44	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2109047

Report Number: EM-F210737

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301

Fax: +886 2 26099303

A.2.2 Emissions outside the frequency band

The emissions (up to 40GHz) not reported for there is no emission be found.

Mode	802.11a	U-NII Band	I
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	37.75	14.94	34.71	27.32	45.30	54.00	8.70	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	37.75	14.94	34.71	27.55	45.53	54.00	8.47	Peak

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	37.80	14.98	34.69	27.36	45.45	54.00	8.55	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	37.80	14.98	34.69	27.14	45.23	54.00	8.77	Peak

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11000.000	38.10	15.24	34.56	29.57	48.35	54.00	5.65	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11000.000	38.10	15.24	34.56	29.51	48.29	54.00	5.71	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.40	15.59	34.59	29.39	48.79	54.00	5.21	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.40	15.59	34.59	28.51	47.91	54.00	6.09	Peak

Mode	802.11a	U-NII Band	III
		Frequency	TX 5785MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	38.47	15.71	34.61	30.38	49.95	54.00	4.05	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	38.47	15.71	34.61	29.81	49.38	54.00	4.62	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301

Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	I
		Frequency	TX 5200MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10400.000	37.60	14.90	34.78	27.45	45.17	54.00	8.83	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10400.000	37.60	14.90	34.78	28.38	46.10	54.00	7.90	Peak

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	37.80	14.98	34.69	28.29	46.38	54.00	7.62	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	37.80	14.98	34.69	27.04	45.13	54.00	8.87	Peak

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.13	15.36	34.57	29.12	48.04	54.00	5.96	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.13	15.36	34.57	28.80	47.72	54.00	6.28	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.40	15.59	34.59	28.91	48.31	54.00	5.69	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.40	15.59	34.59	29.86	49.26	54.00	4.74	Peak

Mode	802.11n-HT20	U-NII Band	III
		Frequency	TX 5785MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	38.47	15.71	34.61	30.39	49.96	54.00	4.04	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	38.47	15.71	34.61	29.83	49.40	54.00	4.60	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301

Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	I
		Frequency	TX 5230MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	37.70	14.94	34.74	28.05	45.95	54.00	8.05	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	37.70	14.94	34.74	27.05	44.95	54.00	9.05	Peak

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	37.83	14.98	34.68	27.90	46.03	54.00	7.97	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	37.83	14.98	34.68	27.66	45.79	54.00	8.21	Peak

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5670MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.27	15.53	34.58	28.62	47.84	54.00	6.16	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.27	15.53	34.58	28.83	48.05	54.00	5.95	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.40	15.59	34.59	29.56	48.96	54.00	5.04	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.40	15.59	34.59	29.50	48.90	54.00	5.10	Peak

Mode	802.11n-HT40	U-NII Band	III
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	38.40	15.65	34.59	29.71	49.17	54.00	4.83	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	38.40	15.65	34.59	29.41	48.87	54.00	5.13	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	I
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	37.65	14.94	34.78	27.94	45.75	54.00	8.25	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	37.65	14.94	34.78	26.84	44.65	54.00	9.35	Peak

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	37.87	15.02	34.67	27.42	45.64	54.00	8.36	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	37.87	15.02	34.67	27.99	46.21	54.00	7.79	Peak

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5610MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.20	15.42	34.57	29.47	48.52	54.00	5.48	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.20	15.42	34.57	29.72	48.77	54.00	5.23	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.33	15.53	34.58	28.79	48.07	54.00	5.93	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.33	15.53	34.58	28.89	48.17	54.00	5.83	Peak

Mode	802.11ac-VHT80	U-NII Band	III
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.43	15.71	34.60	29.44	48.98	54.00	5.02	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.43	15.71	34.60	29.55	49.09	54.00	4.91	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11ac-VHT160	U-NII Band	I/2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	37.80	14.98	34.69	27.44	45.53	54.00	8.47	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	37.80	14.98	34.69	27.55	45.64	54.00	8.36	Peak

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.07	15.36	34.57	28.31	47.17	54.00	6.83	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.07	15.36	34.57	28.52	47.38	54.00	6.62	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301

Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	I
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	37.75	14.94	34.71	27.09	45.07	54.00	8.93	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	37.75	14.94	34.71	27.44	45.42	54.00	8.58	Peak

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5300MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10600.000	37.90	15.02	34.67	28.60	46.85	54.00	7.15	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10600.000	37.90	15.02	34.67	27.54	45.79	54.00	8.21	Peak

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.13	15.36	34.57	28.43	47.35	54.00	6.65	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.13	15.36	34.57	29.82	48.74	54.00	5.26	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301

Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.40	15.59	34.59	28.78	48.18	54.00	5.82	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.40	15.59	34.59	29.29	48.69	54.00	5.31	Peak

Mode	802.11ax-HE20	U-NII Band	III
		Frequency	TX 5785MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11650.000	38.50	15.77	34.62	30.41	50.06	54.00	3.94	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11650.000	38.50	15.77	34.62	29.69	49.34	54.00	4.66	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301

Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	I
		Frequency	TX 5230MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	37.70	14.94	34.74	26.91	44.81	54.00	9.19	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	37.70	14.94	34.74	26.71	44.61	54.00	9.39	Peak

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	37.83	14.98	34.68	28.47	46.60	54.00	7.40	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	37.83	14.98	34.68	27.37	45.50	54.00	8.50	Peak

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5670MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.27	15.53	34.58	29.13	48.35	54.00	5.65	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.27	15.53	34.58	29.33	48.55	54.00	5.45	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.40	15.59	34.59	29.11	48.51	54.00	5.49	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.40	15.59	34.59	29.00	48.40	54.00	5.60	Peak

Mode	802.11ax-HE40	U-NII Band	III
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	38.50	15.71	34.61	29.36	48.96	54.00	5.04	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	38.50	15.71	34.61	29.63	49.23	54.00	4.77	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301

Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	I
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	37.65	14.94	34.78	27.14	44.95	54.00	9.05	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	37.65	14.94	34.78	27.05	44.86	54.00	9.14	Peak

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	37.87	15.02	34.67	28.05	46.27	54.00	7.73	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	37.87	15.02	34.67	28.17	46.39	54.00	7.61	Peak

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5610MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.20	15.42	34.57	28.28	47.33	54.00	6.67	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.20	15.42	34.57	28.54	47.59	54.00	6.41	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.33	15.53	34.58	28.65	47.93	54.00	6.07	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.33	15.53	34.58	28.69	47.97	54.00	6.03	Peak

Mode	802.11ax-HE80	U-NII Band	III
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.43	15.71	34.60	29.21	48.75	54.00	5.25	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.43	15.71	34.60	29.74	49.28	54.00	4.72	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301

Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	I/2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	37.80	14.98	34.69	27.76	45.85	54.00	8.15	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	37.80	14.98	34.69	26.89	44.98	54.00	9.02	Peak

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.07	15.36	34.57	30.14	49.00	54.00	5.00	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.07	15.36	34.57	30.01	48.87	54.00	5.13	Peak

A.2.3 Emissions in Non-restricted Frequency Bands

Pursuant to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 that emission levels below the 15.209 general radiated emissions limits is not required.