

TABLE OF CONTENTS


A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	6
A.2.1 Emissions within Restricted Frequency Bands.....	6
A.2.2 Emissions outside the frequency band.....	148
A.2.3 Emissions in Non-restricted Frequency Bands.....	163
A.3 26dB/6dB BANDWIDTH	164
A.3.1 26dB/6dB Bandwidth Result	164
A.3.2 Measurement Plots	169
A.4 MAXIMUM OUTPUT POWER	189
A.4.1 Average Output Power	189
A.4.2 Measurement Plots	197
A.5 POWER SPECTRAL DENSITY	205
A.5.1 Power Spectral Density Result	205
A.5.2 Measurement Plots	209
A.6 FREQUENCY STABILITY	228
A.6.1 Frequency stability Result	228

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.1 CONDUCTED EMISSION

Test Date	2020/11/11	Temp./Hum.	24°C/57%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #1 (with LUXSHARE-ICT Antenna)		

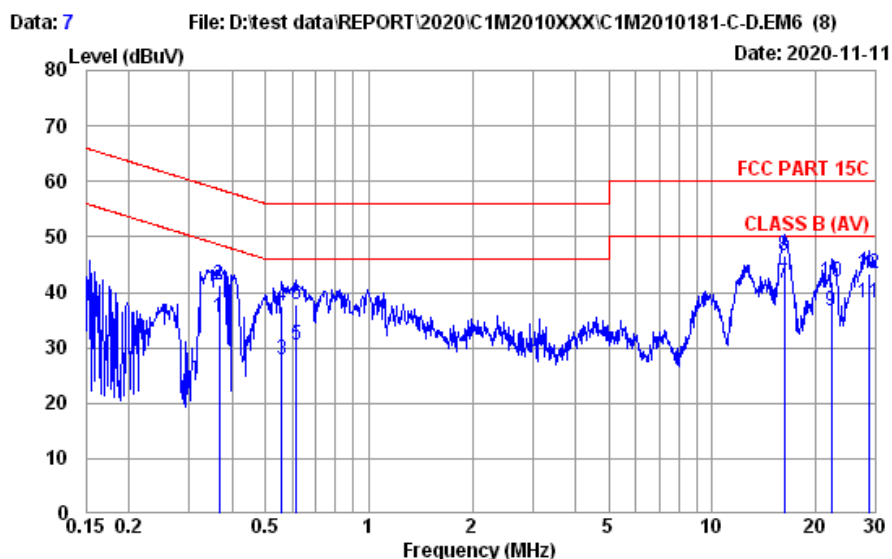

Site No. : No.8 Shielded Room Data No. : 7
Instrument 1 : Receiver ESR(774)
Instrument 2 : EMI432 (567)(A)|CE-08|ESH3-Z2 (354)
Limit : FCC PART 15C Phase : NEUTRAL
Environment : 24°C / 57% Engineer : Roy Hung
EUT Model : 16Z90P Test Rating : 120Vac/60Hz
Test Mode : Operating
Luxshare


	Freq. (MHz)	AMM Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.367	10.20	0.03	9.85	15.31	35.39	48.56	13.17	Average
2	0.367	10.20	0.03	9.85	21.10	41.18	58.56	17.38	QP
3	0.558	10.20	0.03	9.85	7.82	27.90	46.00	18.10	Average
4	0.558	10.20	0.03	9.85	17.41	37.49	56.00	18.51	QP
5	0.614	10.20	0.03	9.85	10.38	30.46	46.00	15.54	Average
6	0.614	10.20	0.03	9.85	17.65	37.73	56.00	18.27	QP
7	16.226	10.75	0.18	9.95	20.72	41.60	50.00	8.40	Average
8	16.226	10.75	0.18	9.95	25.84	46.72	60.00	13.28	QP
9	22.180	10.95	0.21	9.97	15.42	36.55	50.00	13.45	Average
10	22.180	10.95	0.21	9.97	20.77	41.90	60.00	18.10	QP
11	28.603	11.08	0.23	10.00	16.69	38.00	50.00	12.00	Average
12	28.603	11.08	0.23	10.00	21.95	43.26	60.00	16.74	QP

Remarks: 1. Emission Level= AMM Factor + Cable Loss + Pulse Att. + Reading.
2. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2020/11/11	Temp./Hum.	24°C/57%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #1 (with LUXSHARE-ICT Antenna)		

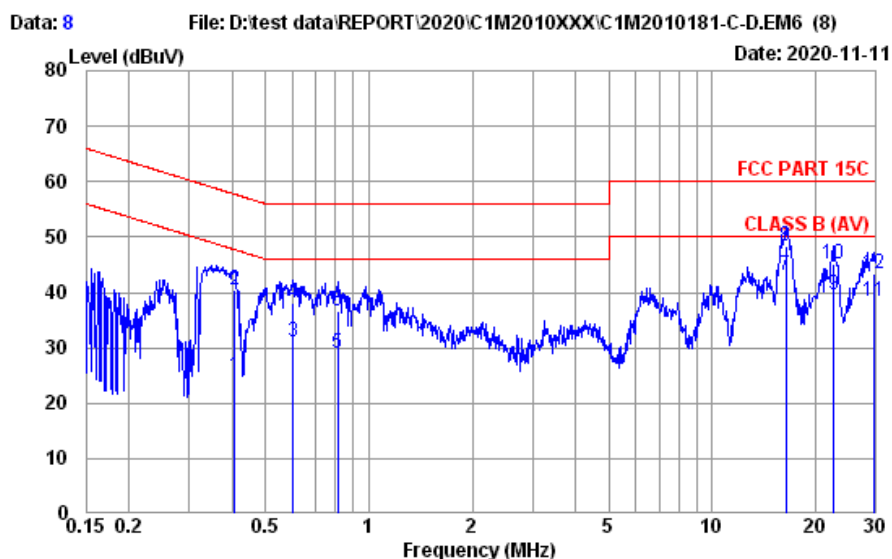

Site No. : No.8 Shielded Room Data No. : 8
Instrument 1 : Receiver ESR(774)
Instrument 2 : ENH432 (567)(A)|CE-08|ESH3-Z2 (354)
Limit : FCC PART 15C Phase : LINE
Environment : 24°C / 57% Engineer : Roy Hung
EUT Model : 16Z90P Test Rating : 120Vac/60Hz
Test Mode : Operating
Luxshare


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.406	10.20	0.03	9.85	4.84	24.92	47.73	22.81	Average
2	0.406	10.20	0.03	9.85	20.24	40.32	57.73	17.41	QP
3	0.601	10.20	0.03	9.85	11.06	31.14	46.00	14.86	Average
4	0.601	10.20	0.03	9.85	17.96	38.04	56.00	17.96	QP
5	0.813	10.20	0.04	9.86	8.99	29.09	46.00	16.91	Average
6	0.813	10.20	0.04	9.86	16.44	36.54	56.00	19.46	QP
7	16.398	10.53	0.18	9.95	22.31	42.97	50.00	7.03	Average
8	16.398	10.53	0.18	9.95	27.67	48.33	60.00	11.67	QP
9	22.655	10.60	0.21	9.97	18.71	39.49	50.00	10.51	Average
10	22.655	10.60	0.21	9.97	24.21	44.99	60.00	15.01	QP
11	29.527	10.60	0.24	10.01	17.41	38.26	50.00	11.74	Average
12	29.527	10.60	0.24	10.01	22.64	43.49	60.00	16.51	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
2. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2020/11/11	Temp./Hum.	24°C/57%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #2 (with INPAQ Antenna)		

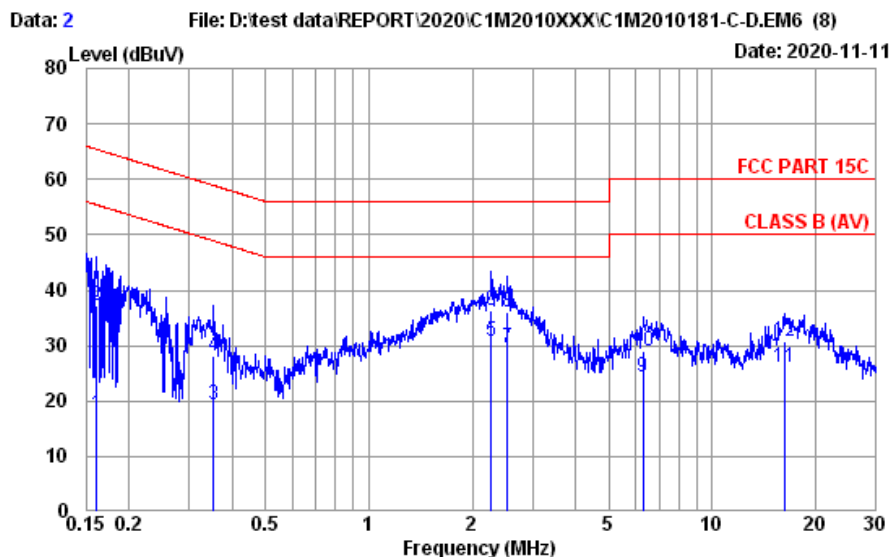

Site No. : No.8 Shielded Room Data No. : 2
Instrument 1 : Receiver ESR(774)
Instrument 2 : ENH432 (567)(A)|CE-08|ESH3-Z2 (354)
Limit : FCC PART 15C Phase : NEUTRAL
Environment : 24°C / 57% Engineer : Roy Hung
EUT Model : 16Z90P Test Rating : 120Vac/60Hz
Test Mode : Operating
INPAQ


	Freq. (MHz)	AMH Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.161	10.20	0.03	9.85	-2.64	17.44	55.43	37.99	Average
2	0.161	10.20	0.03	9.85	17.08	37.16	65.43	28.27	QP
3	0.352	10.20	0.03	9.85	-0.61	19.47	48.91	29.44	Average
4	0.352	10.20	0.03	9.85	8.15	28.23	58.91	30.68	QP
5	2.274	10.30	0.07	9.86	10.62	30.85	46.00	15.15	Average
6	2.274	10.30	0.07	9.86	16.09	36.32	56.00	19.68	QP
7	2.527	10.30	0.07	9.87	9.46	29.70	46.00	16.30	Average
8	2.527	10.30	0.07	9.87	15.89	36.13	56.00	19.87	QP
9	6.285	10.37	0.11	9.89	4.04	24.41	50.00	25.59	Average
10	6.285	10.37	0.11	9.89	8.74	29.11	60.00	30.89	QP
11	16.226	10.75	0.18	9.95	5.20	26.08	50.00	23.92	Average
12	16.226	10.75	0.18	9.95	9.94	30.82	60.00	29.18	QP

Remarks: 1. Emission Level= AMH Factor + Cable Loss + Pulse Att. + Reading.
2. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2020/11/11	Temp./Hum.	24°C/57%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Roy Hung
Test SKU	SKU #2 (with INPAQ Antenna)		

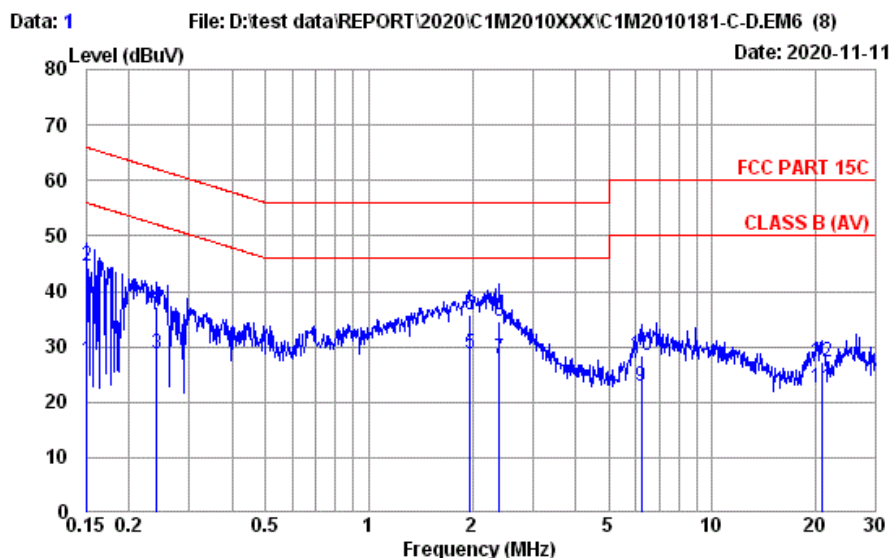

Site No. : No.8 Shielded Room Data No. : 1
Instrument 1 : Receiver ESR(774)
Instrument 2 : ENV432 (567)(A)|CE-08|ESH3-Z2 (354)
Limit : FCC PART 15C Phase : LINE
Environment : 24°C / 57% Engineer : Roy Hung
EUT Model : 16Z90P Test Rating : 120Vac/60Hz
Test Mode : Operating
INPAQ

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.151	10.20	0.03	9.85	7.46	27.54	55.96	28.42	Average
2	0.151	10.20	0.03	9.85	24.34	44.42	65.96	21.54	QP
3	0.240	10.20	0.03	9.85	8.51	28.59	52.08	23.49	Average
4	0.240	10.20	0.03	9.85	17.09	37.17	62.08	24.91	QP
5	1.970	10.30	0.06	9.86	8.57	28.79	46.00	17.21	Average
6	1.970	10.30	0.06	9.86	15.53	35.75	56.00	20.25	QP
7	2.396	10.30	0.07	9.86	7.68	27.91	46.00	18.09	Average
8	2.396	10.30	0.07	9.86	14.30	34.53	56.00	21.47	QP
9	6.219	10.30	0.11	9.89	2.47	22.77	50.00	27.23	Average
10	6.219	10.30	0.11	9.89	8.07	28.37	60.00	31.63	QP
11	20.814	10.60	0.20	9.96	1.70	22.46	50.00	27.54	Average
12	20.814	10.60	0.20	9.96	6.56	27.32	60.00	32.68	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
2. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement

A.2 RADIATED EMISSION

Test Date	2020/10/30 ~ 11/06	Temp./Hum.	22 ~ 24°C/52 ~ 62%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Sam Chang

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

Mode	802.11ac-VHT80	Band	NII-2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.970	23.78	1.23	26.53	36.07	34.55	40.00	5.45	Peak
100.810	16.84	2.44	26.31	38.38	31.35	43.50	12.15	Peak
164.830	16.10	3.21	25.99	41.01	34.33	43.50	9.17	Peak
384.050	21.47	5.79	26.41	30.44	31.29	46.00	14.71	Peak
706.090	25.07	7.65	27.49	29.51	34.74	46.00	11.26	Peak
969.930	27.23	9.03	26.92	28.56	37.90	54.00	16.10	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
53.280	13.89	1.70	26.48	48.14	37.25	40.00	2.75	Peak
103.720	17.15	2.48	26.30	43.27	36.60	43.50	6.90	Peak
153.190	17.02	3.09	26.04	40.46	34.53	43.50	8.97	Peak
207.510	15.91	3.62	25.85	35.89	29.57	43.50	13.93	Peak
390.840	21.63	5.89	26.47	29.39	30.44	46.00	15.56	Peak
731.310	25.36	7.78	27.47	29.68	35.35	46.00	10.65	Peak


Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	802.11a	Band	NII-I
		Frequency	TX 5180MHz

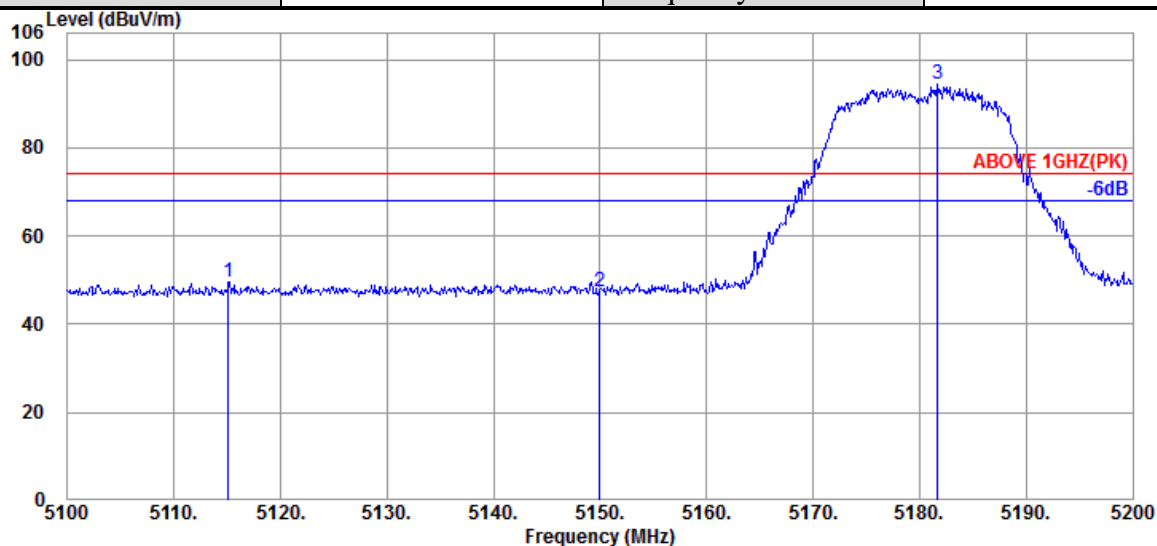

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5115.100	34.33	10.68	34.39	39.08	49.70	74.00	19.45	Peak
5150.000	34.40	10.70	34.38	36.59	47.31	74.00	19.63	Peak
@ 5181.700	34.47	10.72	34.37	83.57	94.39	---	---	Peak

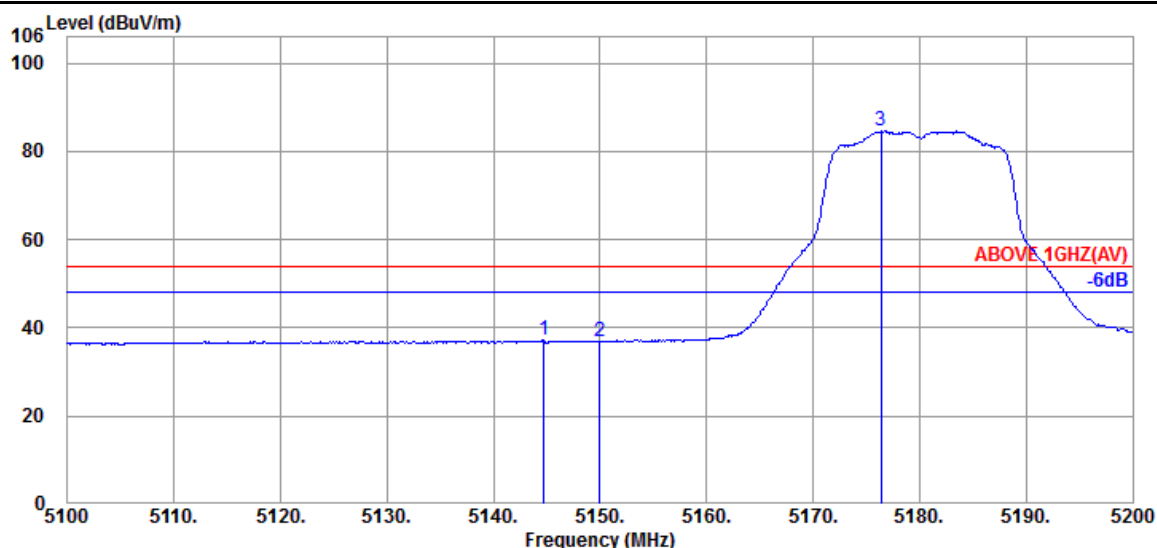

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.700	34.40	10.70	34.38	26.50	37.22	54.00	11.15	Average
5150.000	34.40	10.70	34.38	26.21	36.93	54.00	11.39	Average
@ 5176.400	34.47	10.72	34.37	73.80	84.62	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM2010181

Report Number: EM-F200514

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	Band	NII-I
		Frequency	TX 5180MHz

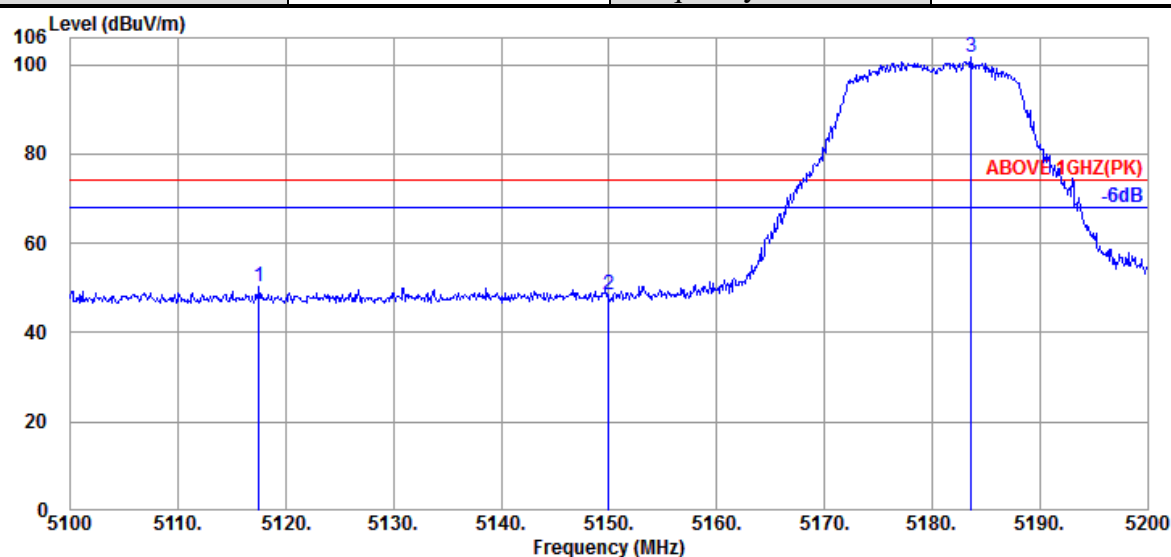

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5117.500	34.33	10.68	34.39	39.58	50.20	74.00	19.36	Peak
5150.000	34.40	10.70	34.38	37.59	48.31	74.00	21.89	Peak
@ 5183.600	34.47	10.72	34.37	90.81	101.63	---	---	Peak

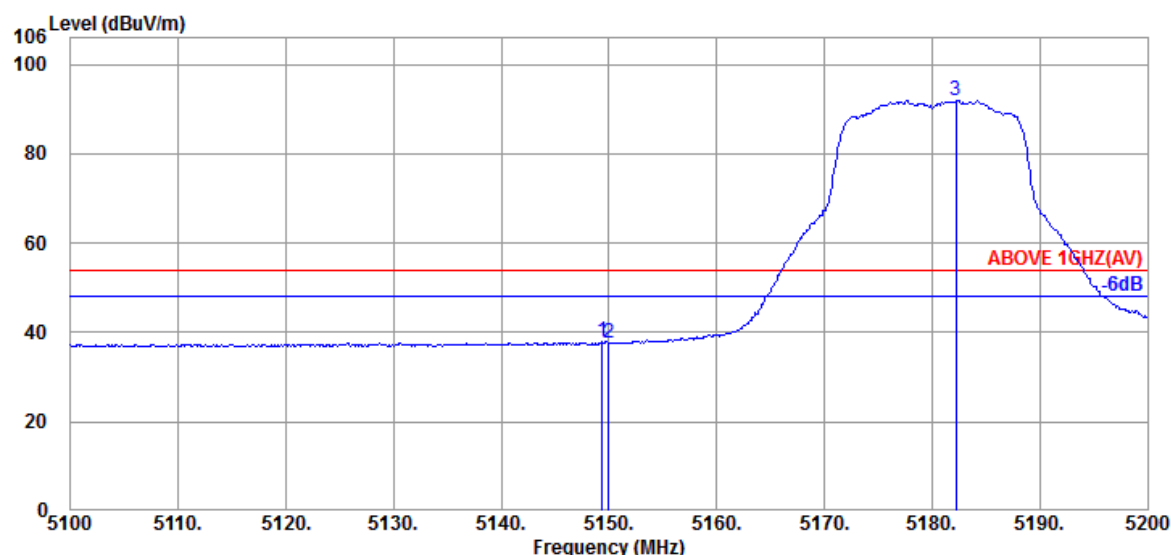

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.400	34.40	10.70	34.38	27.29	38.01	54.00	10.86	Average
5150.000	34.40	10.70	34.38	27.02	37.74	54.00	10.94	Average
@ 5182.200	34.47	10.72	34.37	81.04	91.86	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM2010181


Report Number: EM-F200514

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	Band	NII-2A
		Frequency	TX 5320MHz

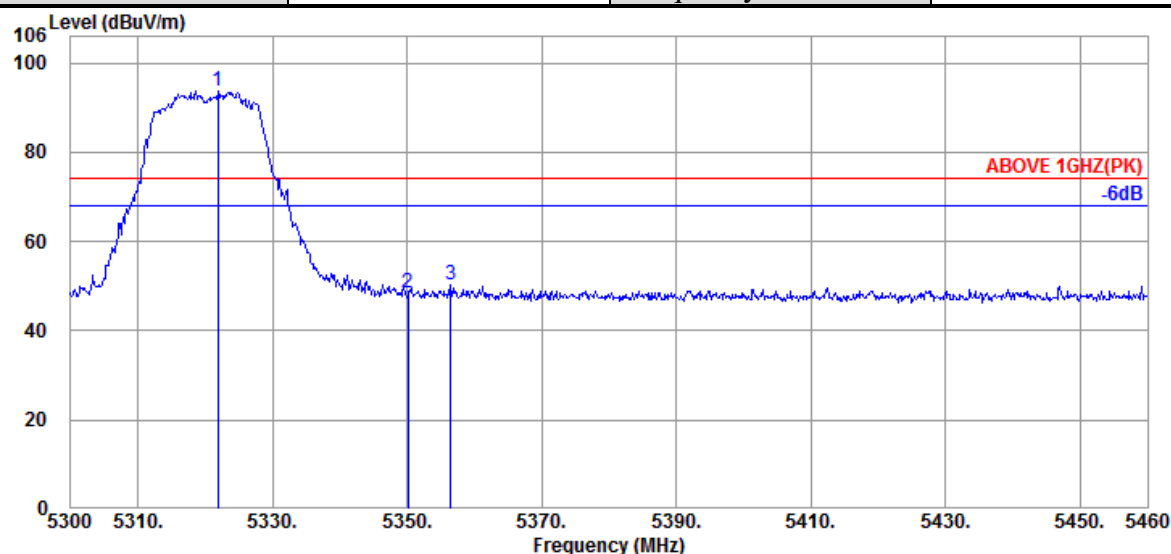

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	5321.920	34.60	10.83	34.33	82.52	93.62	---	---	Peak
	5350.080	34.60	10.83	34.31	37.43	48.55	74.00	20.47	Peak
	5356.480	34.60	10.85	34.31	39.12	50.26	74.00	18.22	Peak

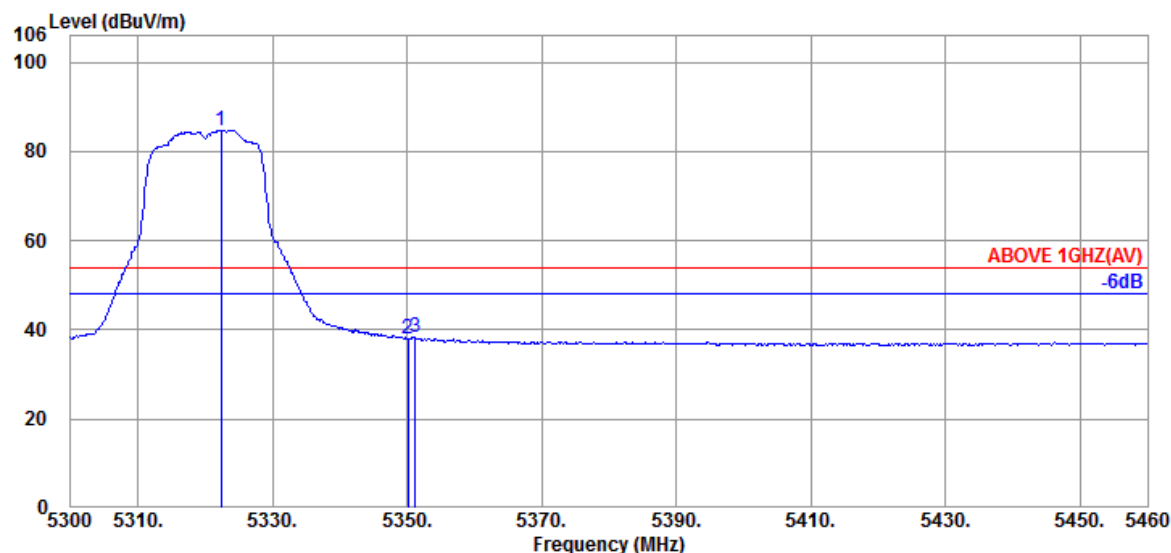


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	5322.400	34.60	10.83	34.33	73.66	84.76	---	---	Average
	5350.080	34.60	10.83	34.31	26.96	38.08	54.00	15.92	Average
	5351.200	34.60	10.83	34.31	27.22	38.34	54.00	15.66	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11a	Band	NII-2A
		Frequency	TX 5320MHz

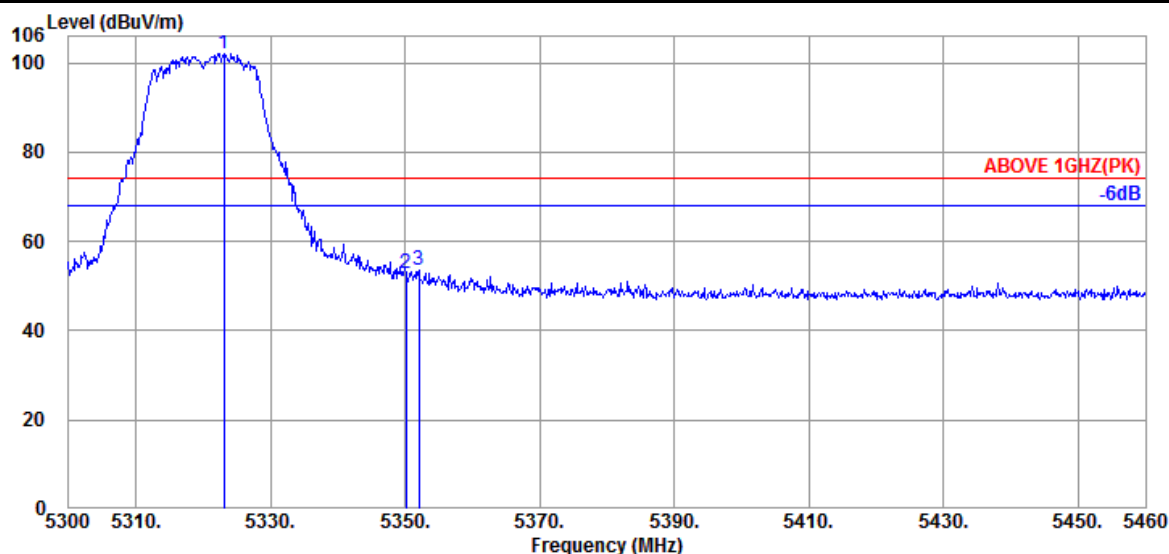

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5323.040	34.60	10.83	34.33	90.97	102.07	---	---	Peak
5350.080	34.60	10.83	34.31	41.79	52.91	74.00	18.69	Peak
5352.000	34.60	10.83	34.31	42.52	53.64	74.00	18.48	Peak

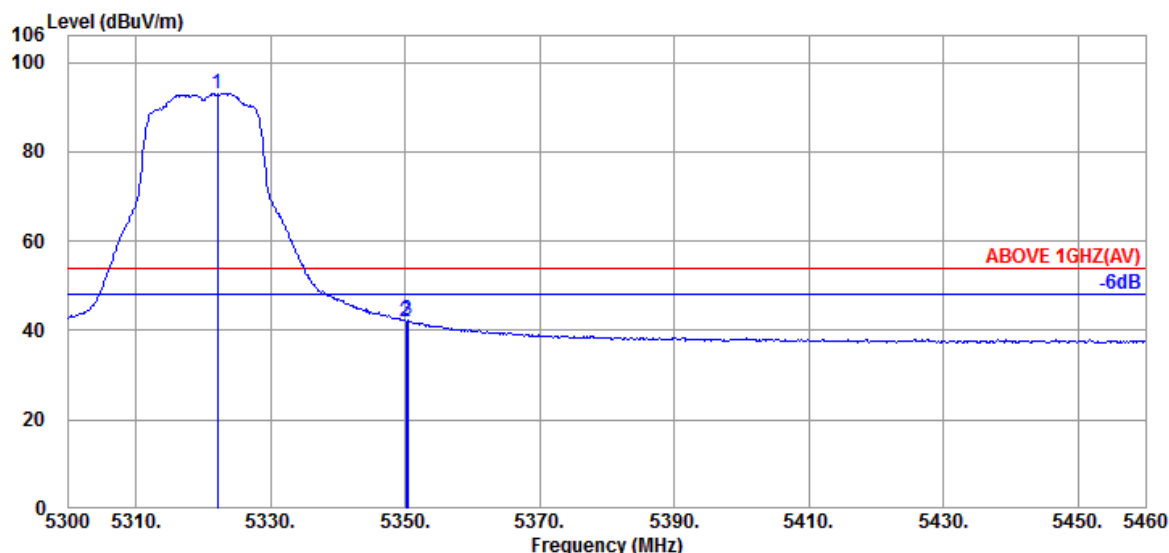


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5322.080	34.60	10.83	34.33	81.93	93.03	---	---	Average
5350.080	34.60	10.83	34.31	30.97	42.09	54.00	11.91	Average
5350.400	34.60	10.83	34.31	31.06	42.18	54.00	11.82	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11a	Band	NII-2C
		Frequency	TX 5500MHz

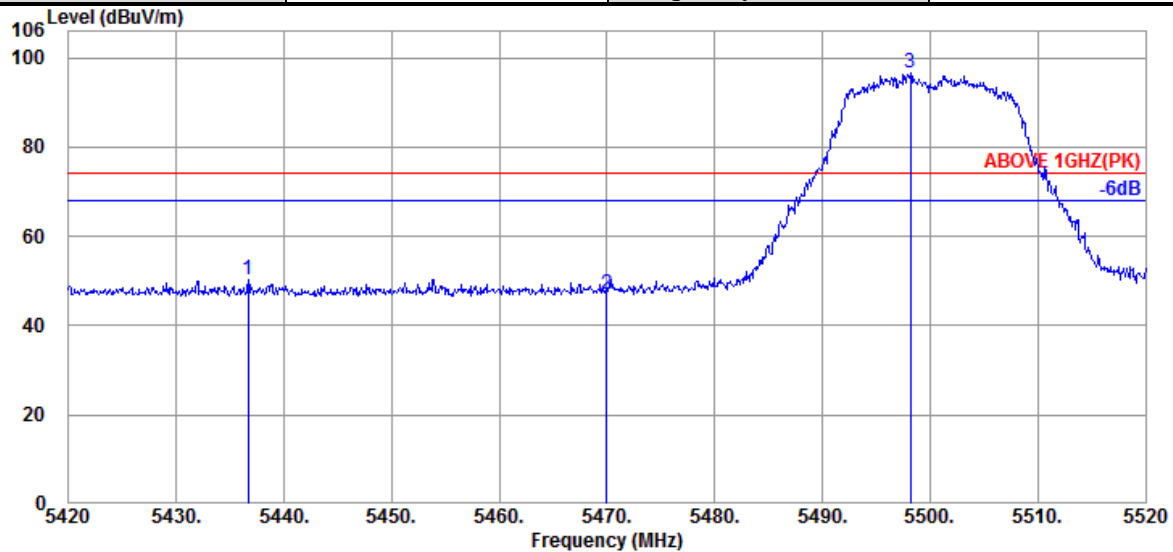

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5436.700	34.67	10.89	34.29	39.11	50.38	74.00	18.19	Peak
5470.000	34.67	10.91	34.28	35.67	46.97	74.00	20.68	Peak
@ 5498.200	34.60	10.93	34.27	85.25	96.51	---	---	Peak

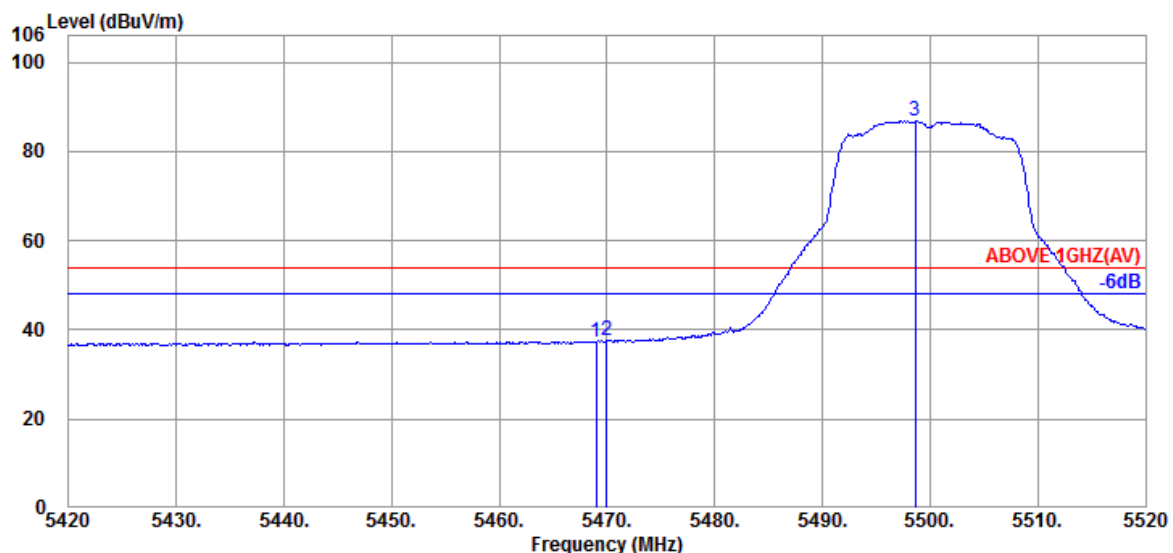


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.67	10.91	34.28	26.11	37.41	54.00	10.26	Average
5470.000	34.67	10.91	34.28	26.16	37.46	54.00	10.47	Average
@ 5498.600	34.60	10.93	34.27	75.50	86.76	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11a	Band	NII-2C
		Frequency	TX 5500MHz

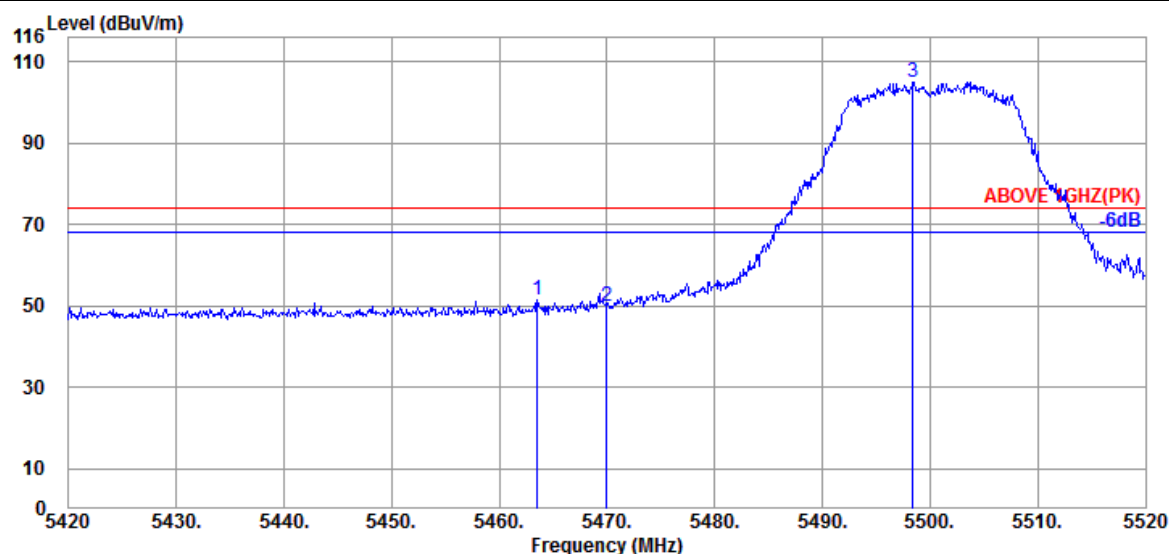

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.500	34.70	10.91	34.28	40.14	51.47	74.00	17.73	Peak
5470.000	34.67	10.91	34.28	38.68	49.98	74.00	18.87	Peak
@ 5498.400	34.60	10.93	34.27	93.75	105.01	---	---	Peak

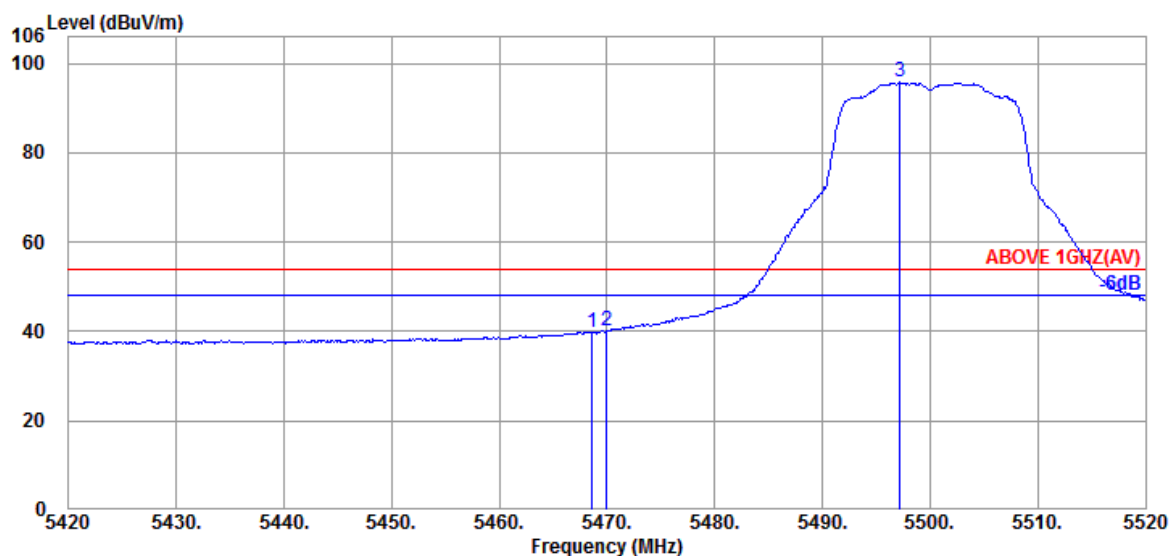


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.600	34.67	10.91	34.28	28.59	39.89	54.00	9.73	Average
5470.000	34.67	10.91	34.28	28.88	40.18	54.00	9.71	Average
@ 5497.200	34.60	10.93	34.27	84.45	95.71	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	Band	NII-2C
		Frequency	TX 5700MHz

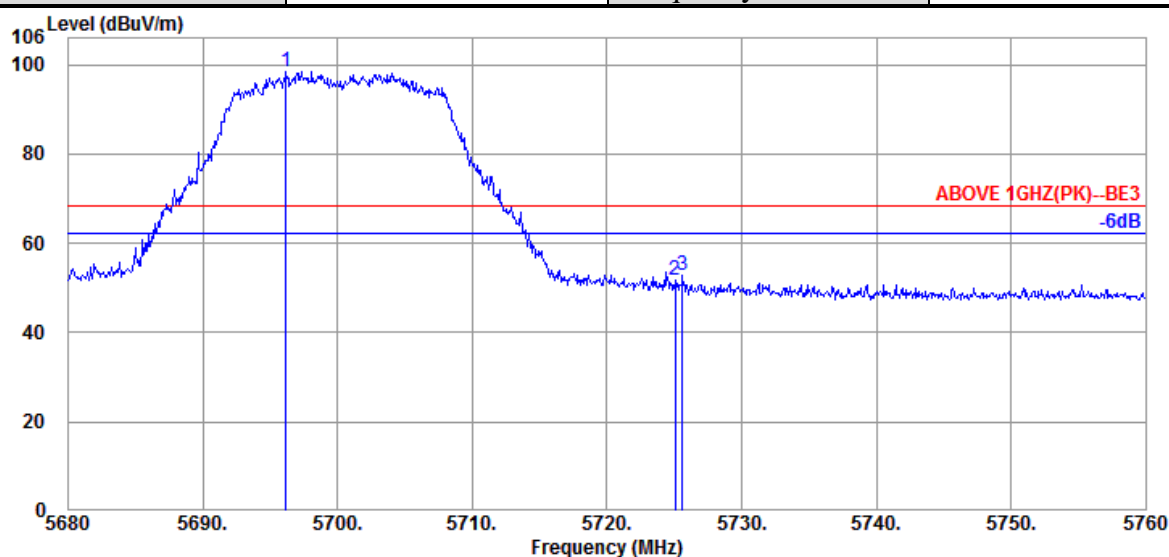

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5696.160	34.80	11.03	34.36	86.96	98.43	---	---	Peak
	5725.040	34.80	11.05	34.37	40.22	51.70	68.20	14.71	Peak
	5725.600	34.80	11.05	34.37	41.22	52.70	68.20	12.75	Peak

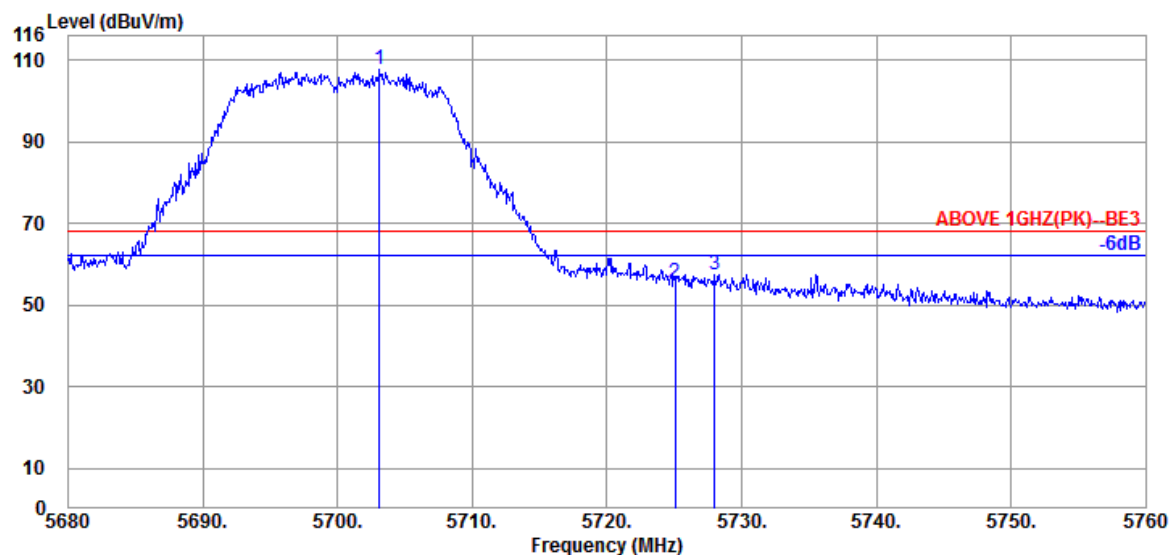

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5703.120	34.80	11.03	34.36	96.02	107.49	---	---	Peak
	5725.040	34.80	11.05	34.37	43.78	55.26	68.20	12.41	Peak
	5728.000	34.80	11.05	34.38	45.94	57.41	68.20	10.78	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	Band	NII-2C
		Frequency	TX 5720MHz

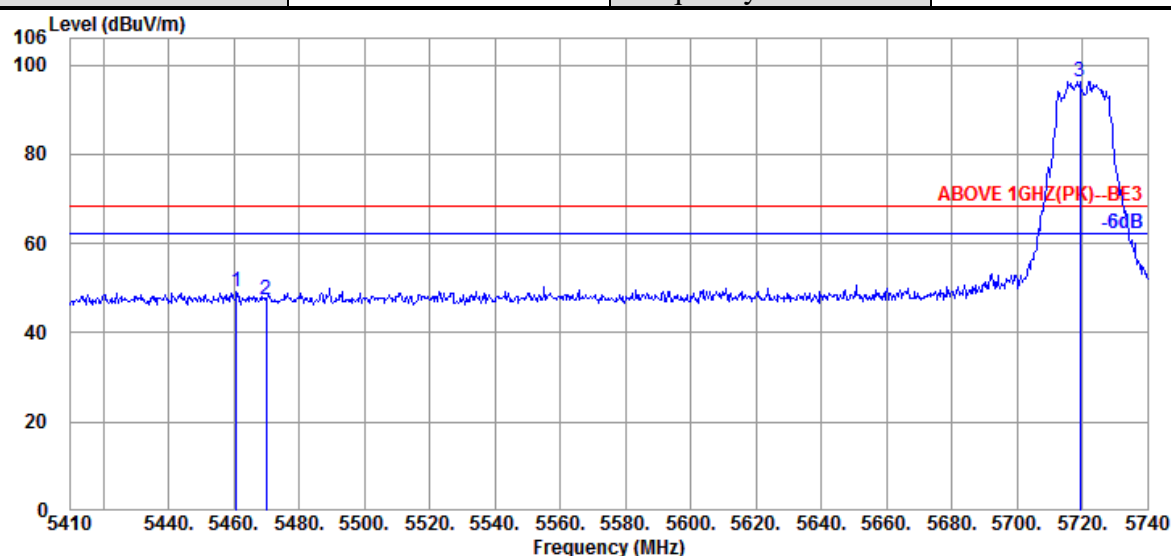

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.820	34.70	10.91	34.28	37.70	49.03	68.20	13.17	Peak
5470.060	34.67	10.91	34.28	36.12	47.42	68.20	14.84	Peak
@ 5719.210	34.80	11.05	34.37	84.79	96.27	---	---	Peak

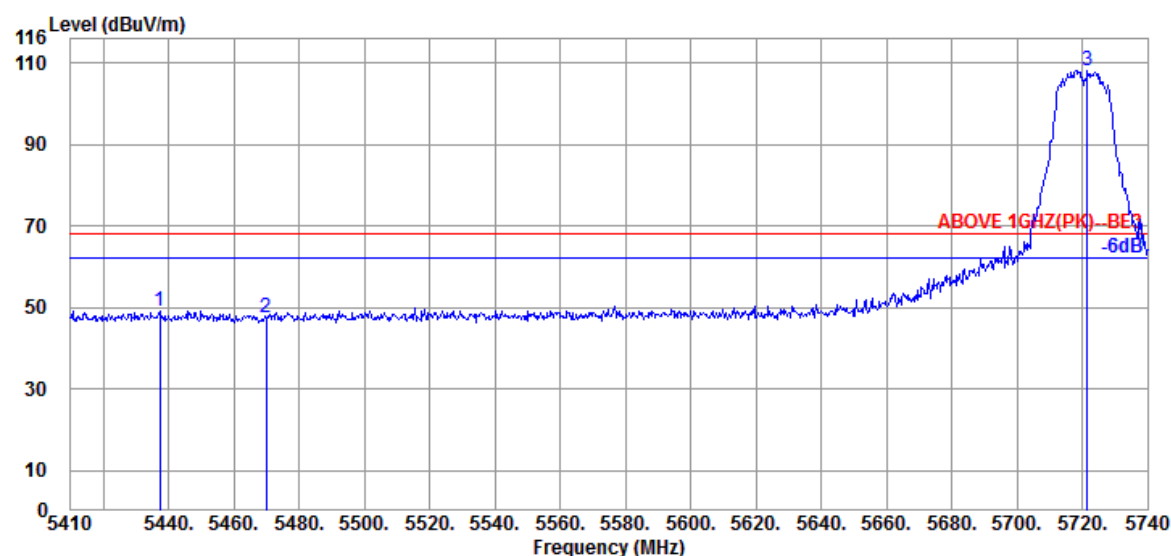

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5437.390	34.67	10.89	34.29	37.69	48.96	68.20	12.91	Peak
5470.060	34.67	10.91	34.28	36.33	47.63	68.20	14.99	Peak
@ 5721.520	34.80	11.05	34.37	96.46	107.94	---	---	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM2010181

Report Number: EM-F200514

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	Band	NII-2C
		Frequency	TX 5720MHz

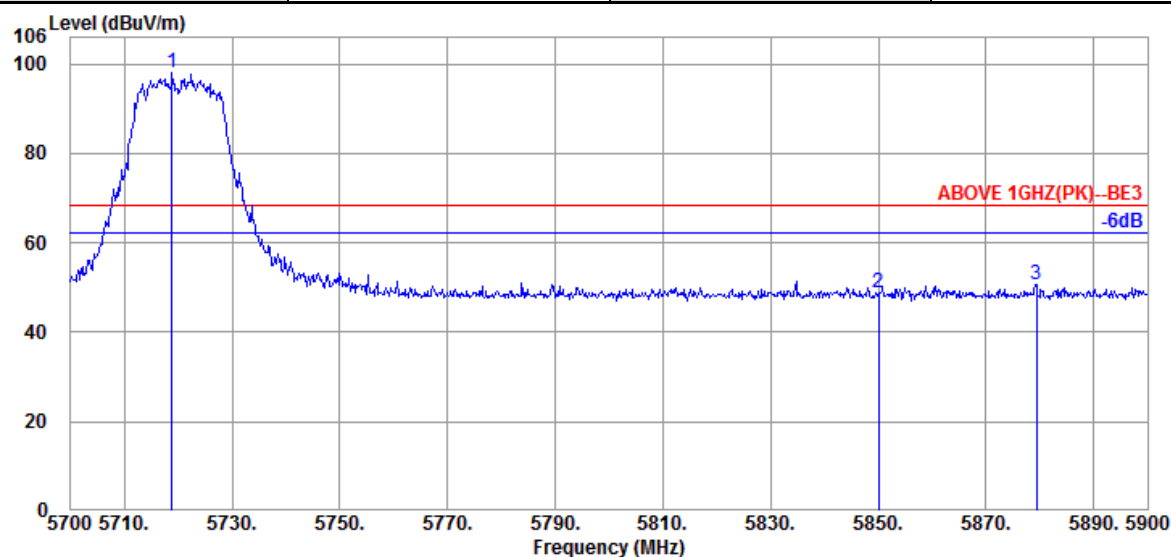

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5718.800	34.80	11.05	34.37	86.46	97.94	---	---	Peak
	5850.000	35.40	11.10	34.43	36.77	48.84	68.20	15.82	Peak
	5879.400	35.40	11.12	34.45	38.58	50.65	68.20	12.70	Peak

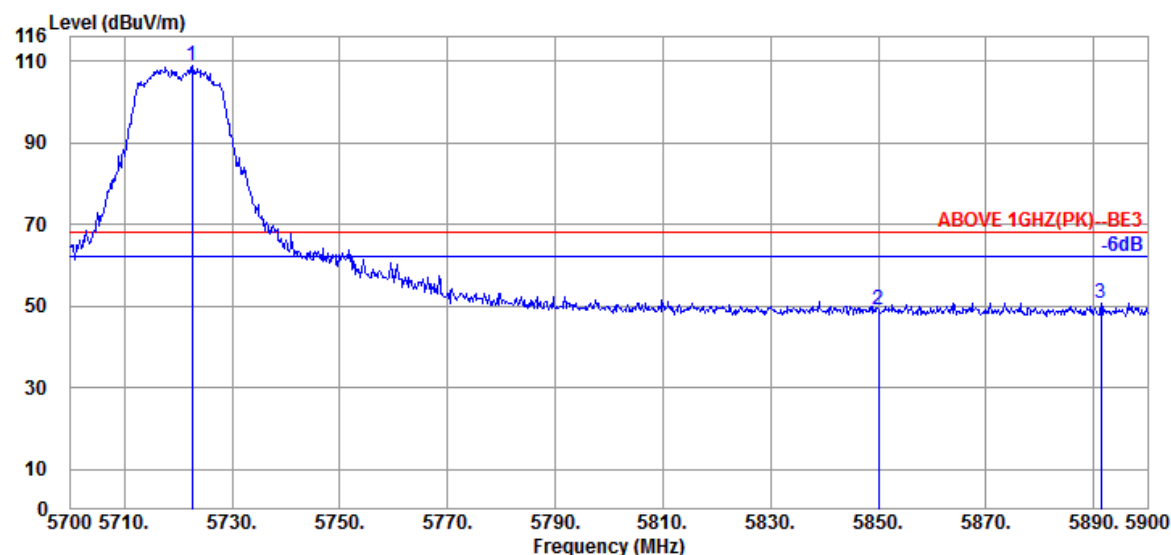

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5722.600	34.80	11.05	34.37	97.54	109.02	---	---	Peak
	5850.000	35.40	11.10	34.43	36.97	49.04	68.20	14.27	Peak
	5891.400	35.40	11.12	34.45	38.65	50.72	68.20	11.83	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM2010181

Report Number: EM-F200514


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	Band	NII-III
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

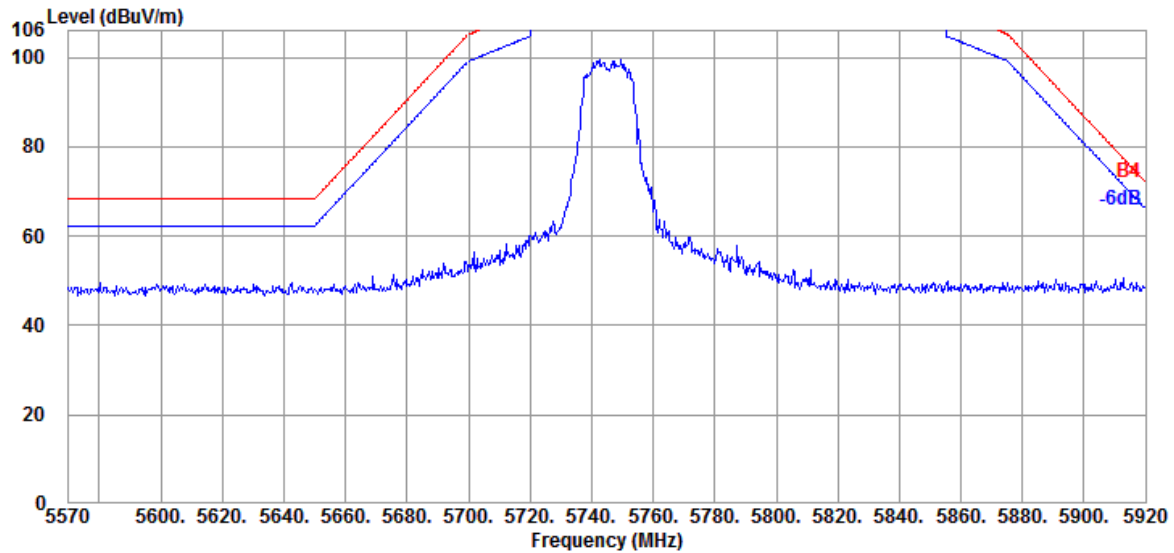

Antenna at Vertical Polarization

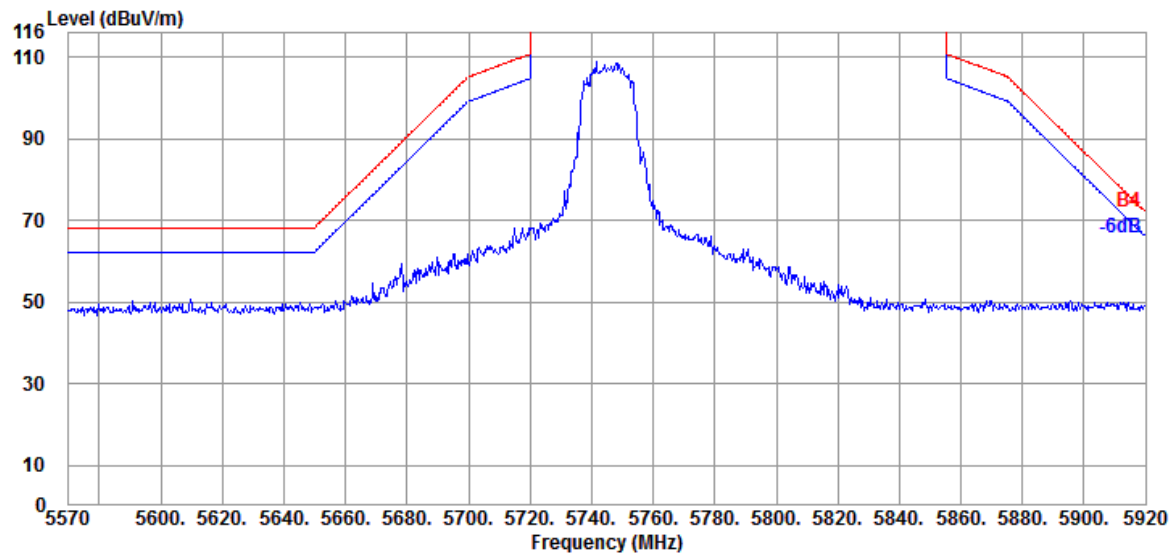


Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	Band	NII-III
		Frequency	TX 5825MHz

Antenna at Horizontal Polarization

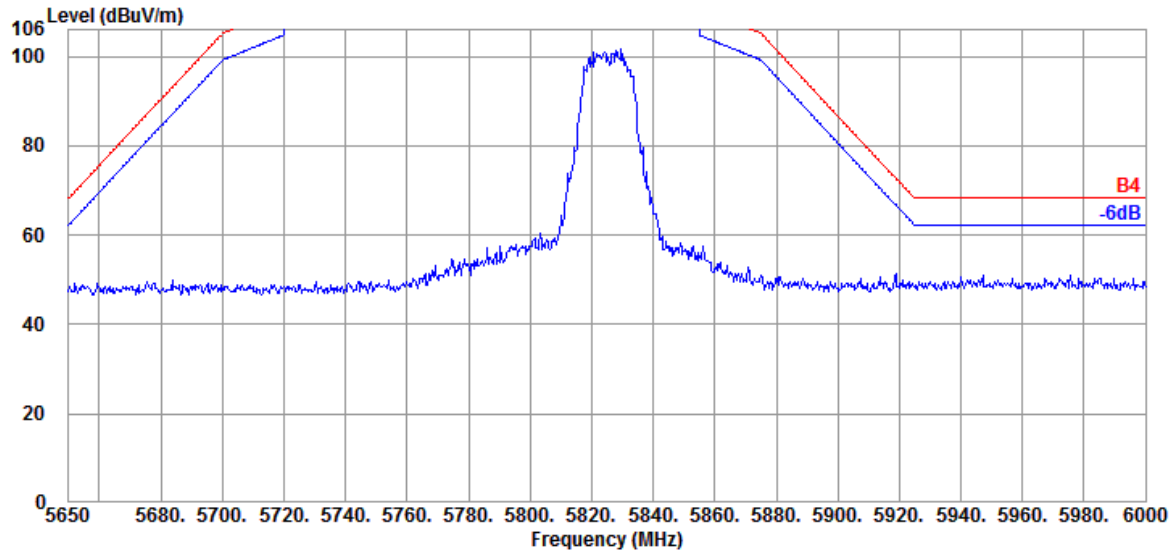


Antenna at Vertical Polarization

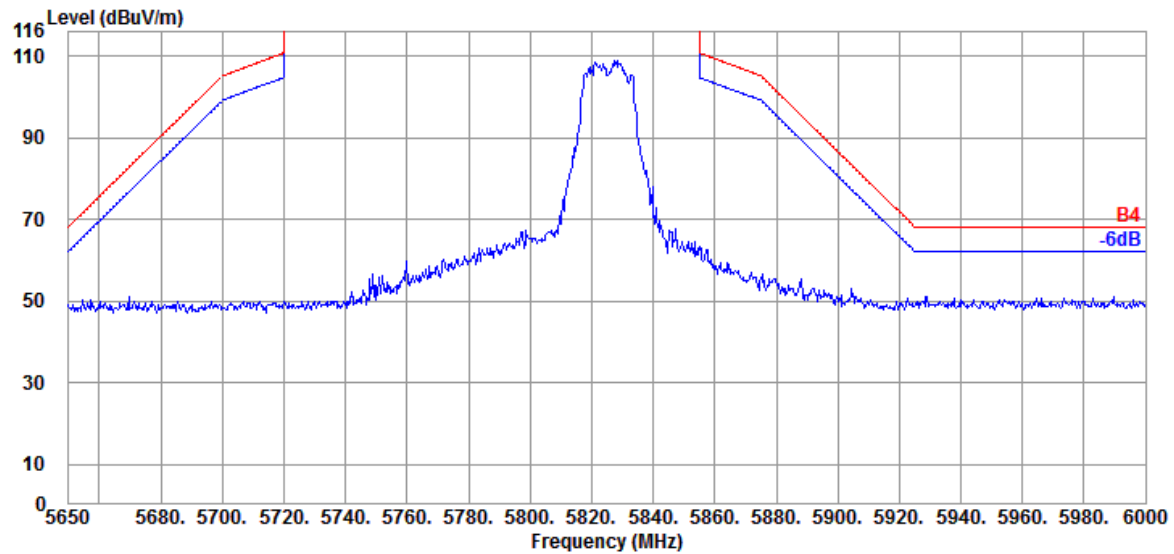

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Band	NII-I
		Frequency	TX 5180MHz

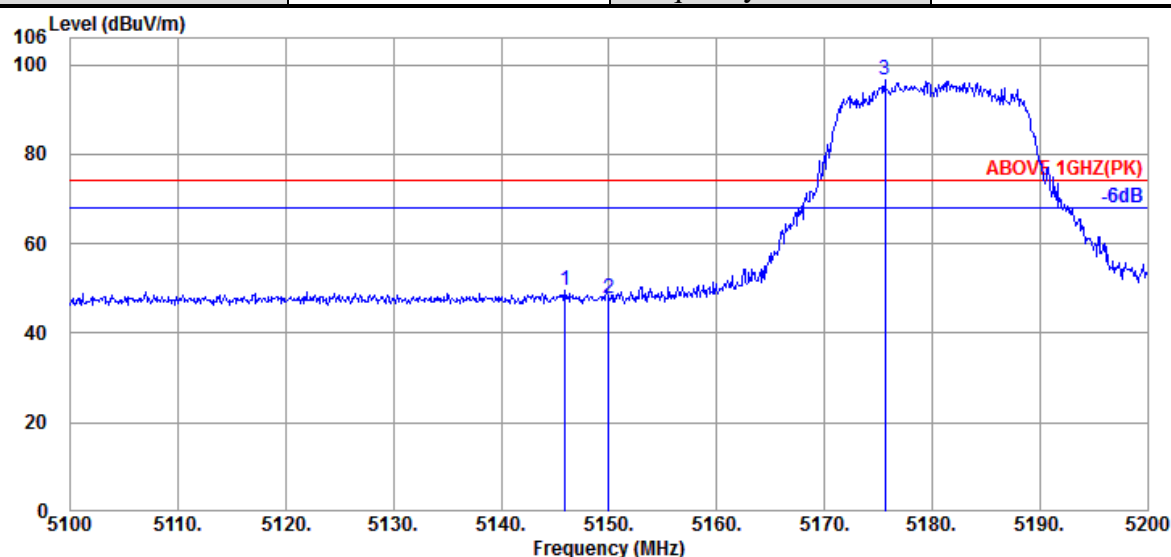

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.900	34.40	10.70	34.38	38.69	49.41	74.00	18.95	Peak
5150.000	34.40	10.70	34.38	37.18	47.90	74.00	20.88	Peak
@ 5175.600	34.47	10.72	34.37	85.63	96.45	---	---	Peak

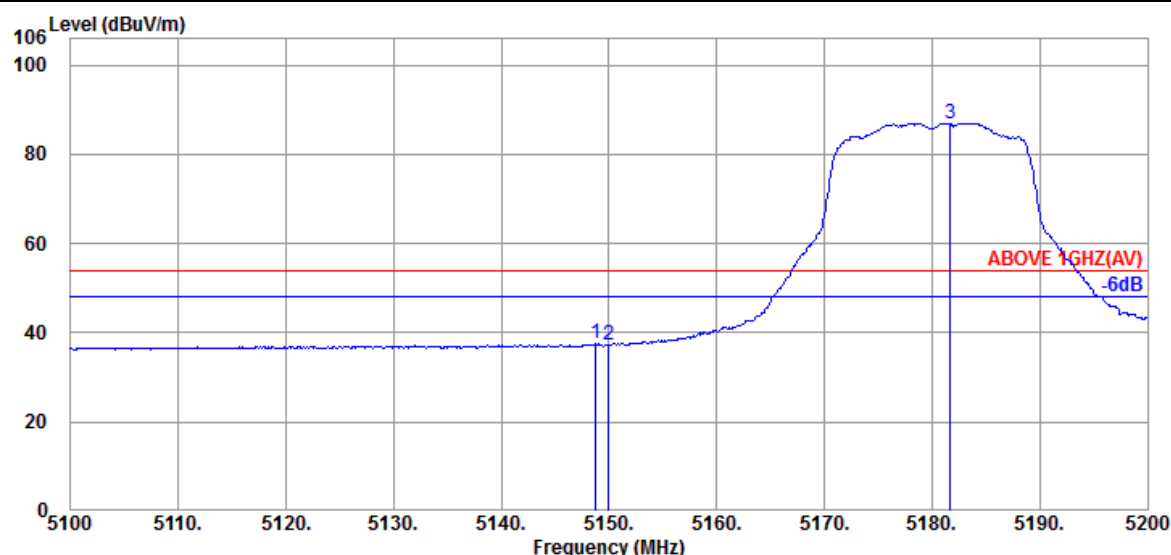


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.800	34.40	10.70	34.38	26.86	37.58	54.00	11.13	Average
5150.000	34.40	10.70	34.38	26.53	37.25	54.00	11.52	Average
@ 5181.700	34.47	10.72	34.37	76.17	86.99	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Band	NII-I
		Frequency	TX 5180MHz

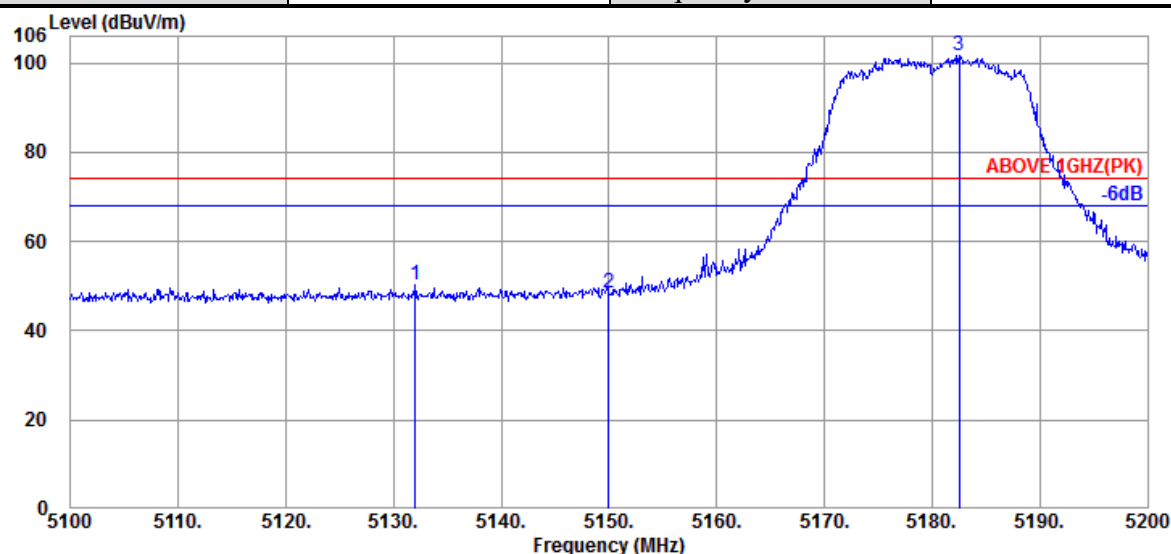

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5132.000	34.37	10.70	34.39	39.67	50.35	74.00	19.04	Peak
5150.000	34.40	10.70	34.38	37.60	48.32	74.00	21.50	Peak
@ 5182.500	34.47	10.72	34.37	90.91	101.73	---	---	Peak

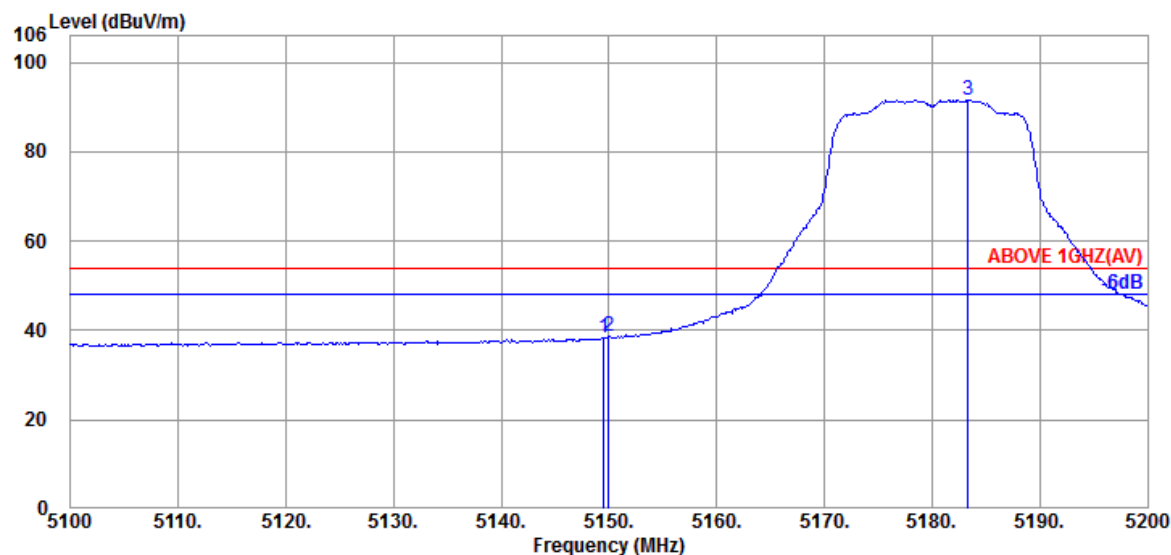


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	34.40	10.70	34.38	27.71	38.43	54.00	11.03	Average
5150.000	34.40	10.70	34.38	27.81	38.53	54.00	11.39	Average
@ 5183.300	34.47	10.72	34.37	80.73	91.55	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Band	NII-2A
		Frequency	TX 5320MHz

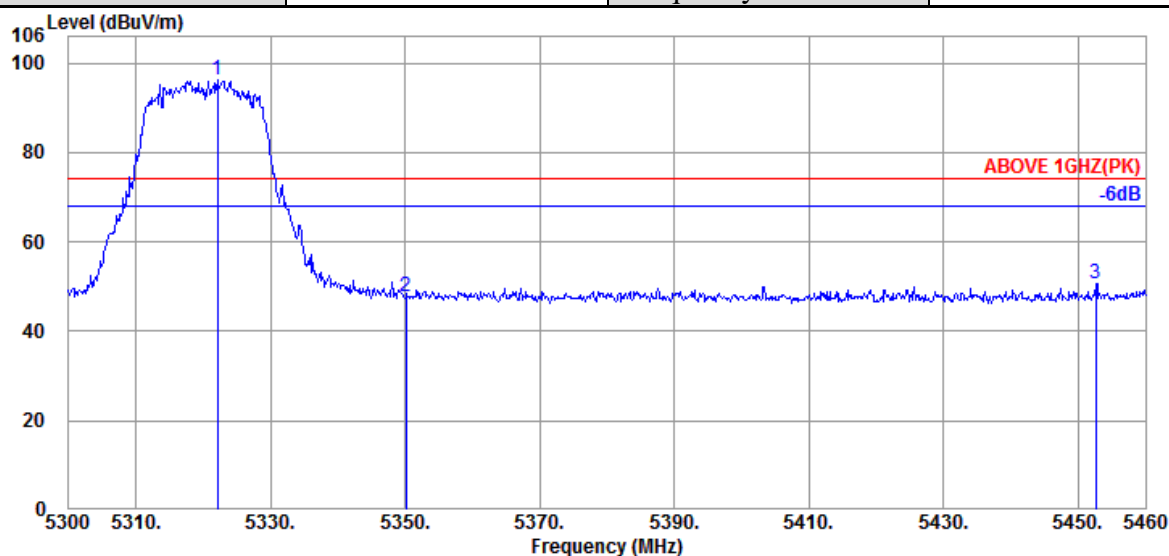

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.080	34.60	10.83	34.33	85.04	96.14	---	---	Peak
5350.080	34.60	10.83	34.31	36.54	47.66	74.00	20.22	Peak
5452.640	34.70	10.89	34.28	39.45	50.76	74.00	18.32	Peak

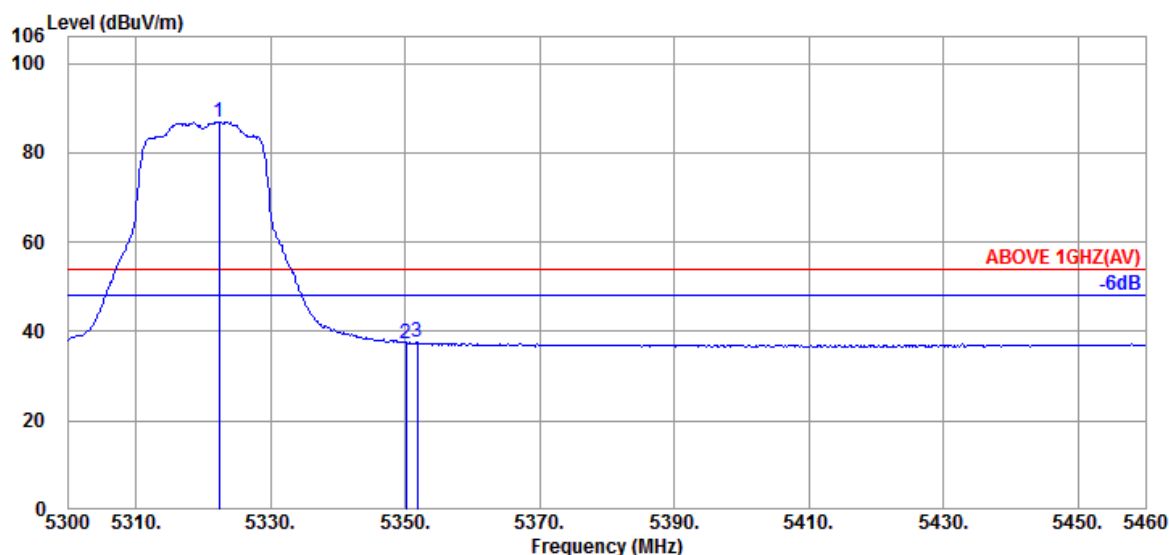


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.400	34.60	10.83	34.33	75.79	86.89	---	---	Average
5350.080	34.60	10.83	34.31	26.32	37.44	54.00	10.90	Average
5351.840	34.60	10.83	34.31	26.46	37.58	54.00	10.24	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Band	NII-2A
		Frequency	TX 5320MHz

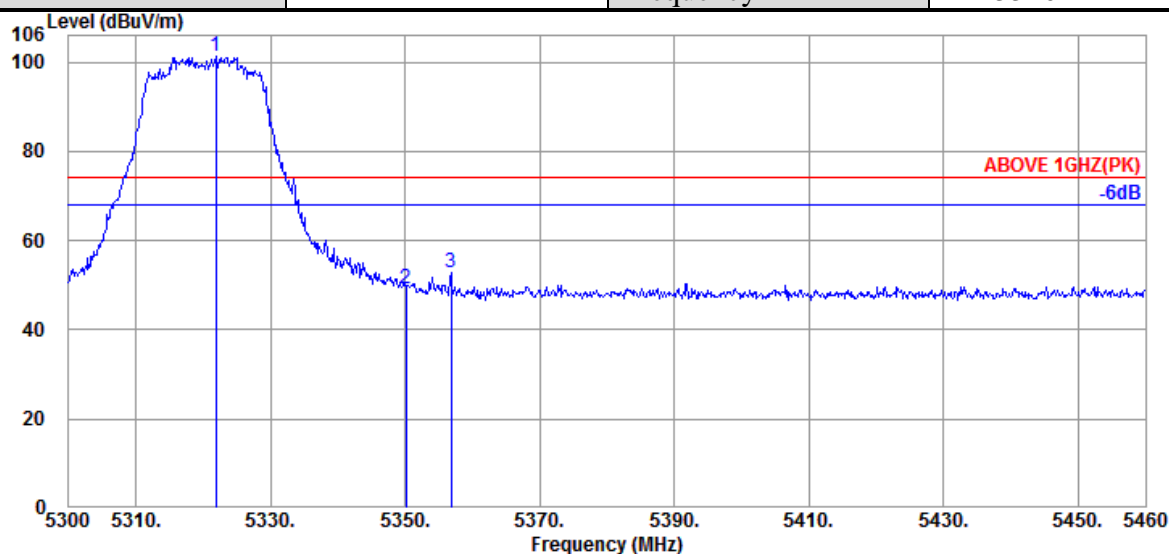

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.920	34.60	10.83	34.33	90.18	101.28	---	---	Peak
5350.080	34.60	10.83	34.31	38.09	49.21	74.00	20.84	Peak
5356.800	34.60	10.85	34.31	41.77	52.91	74.00	18.40	Peak

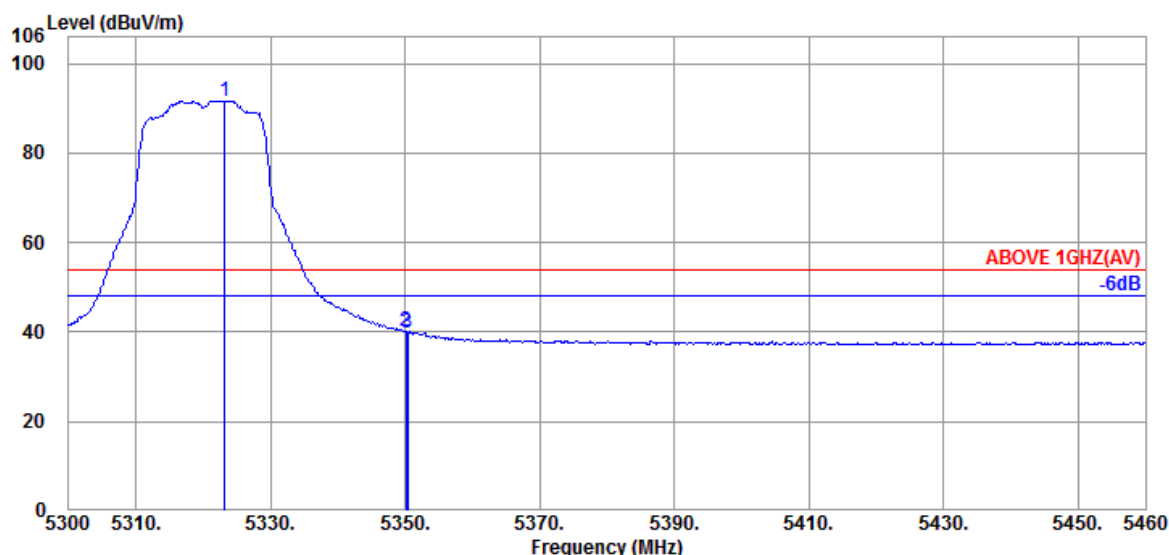

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.200	34.60	10.83	34.33	80.60	91.70	---	---	Average
5350.080	34.60	10.83	34.31	29.00	40.12	54.00	10.68	Average
5350.400	34.60	10.83	34.31	28.74	39.86	54.00	10.22	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	Band	NII-2C
		Frequency	TX 5500MHz

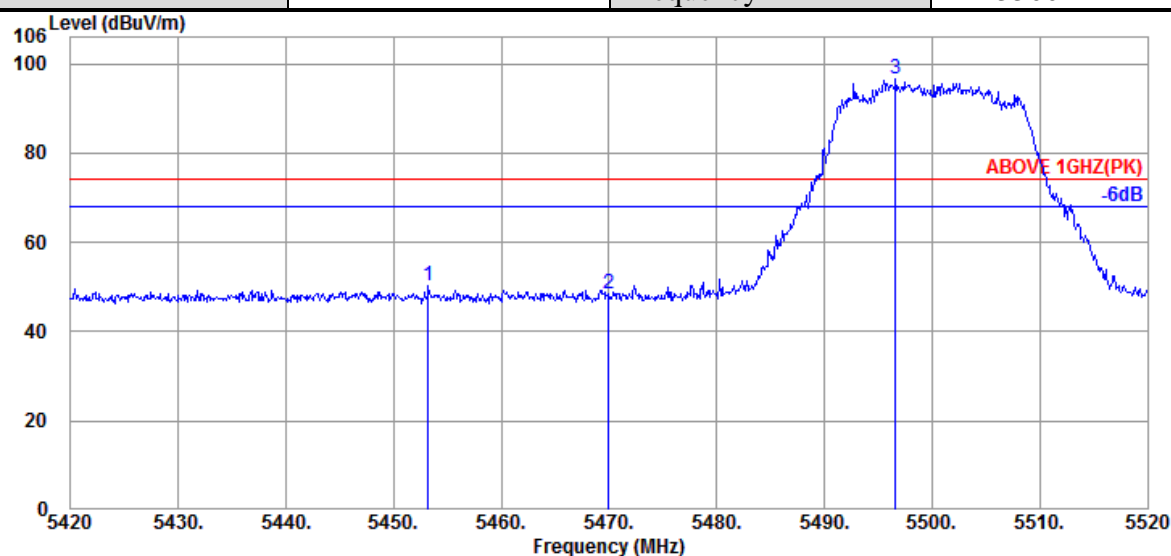

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.200	34.70	10.89	34.28	38.99	50.30	74.00	17.43	Peak
5470.000	34.67	10.91	34.28	37.02	48.32	74.00	21.20	Peak
@ 5496.600	34.60	10.93	34.27	85.29	96.55	---	---	Peak

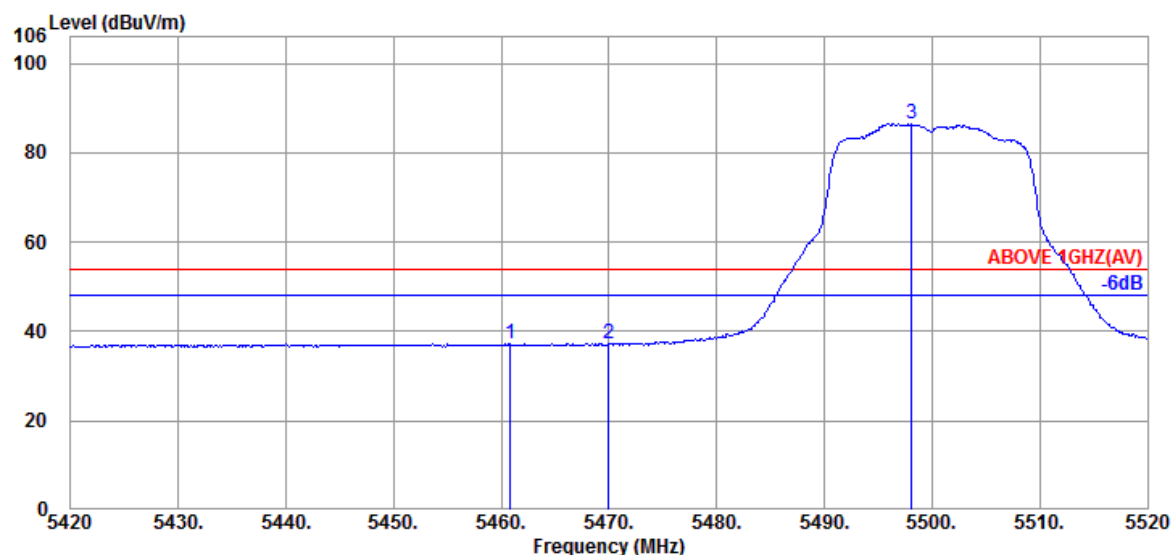

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.800	34.70	10.91	34.28	26.03	37.36	54.00	10.23	Average
5470.000	34.67	10.91	34.28	25.82	37.12	54.00	10.41	Average
@ 5498.100	34.60	10.93	34.27	75.26	86.52	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM2010181

Report Number: EM-F200514


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11n-HT20	Band	NII-2C
		Frequency	TX 5500MHz

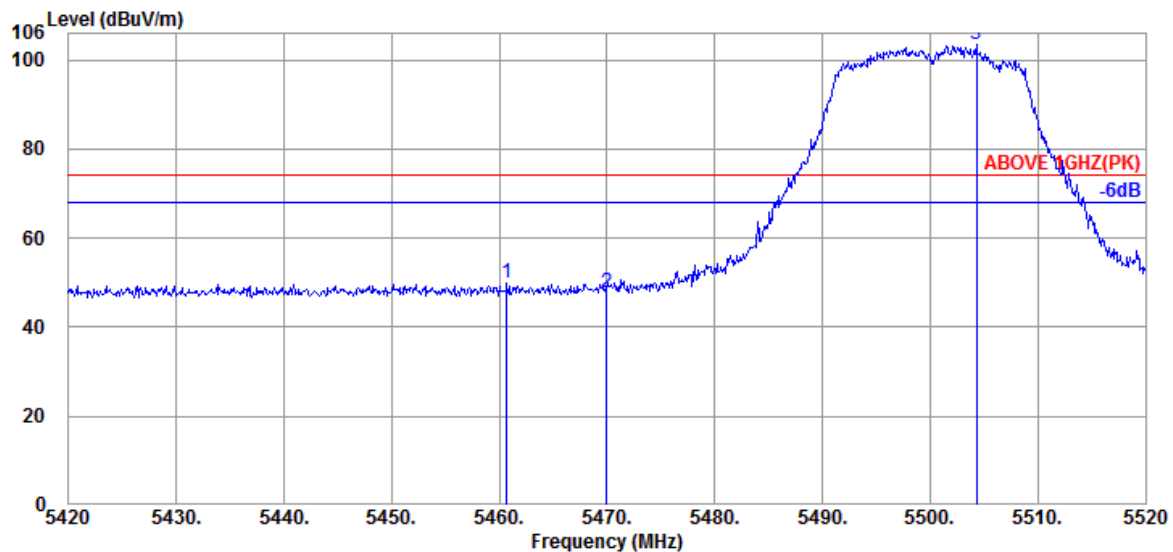

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.700	34.70	10.91	34.28	38.61	49.94	74.00	18.34	Peak
5470.000	34.67	10.91	34.28	36.40	47.70	74.00	20.44	Peak
@ 5504.300	34.60	10.93	34.27	92.18	103.44	---	---	Peak

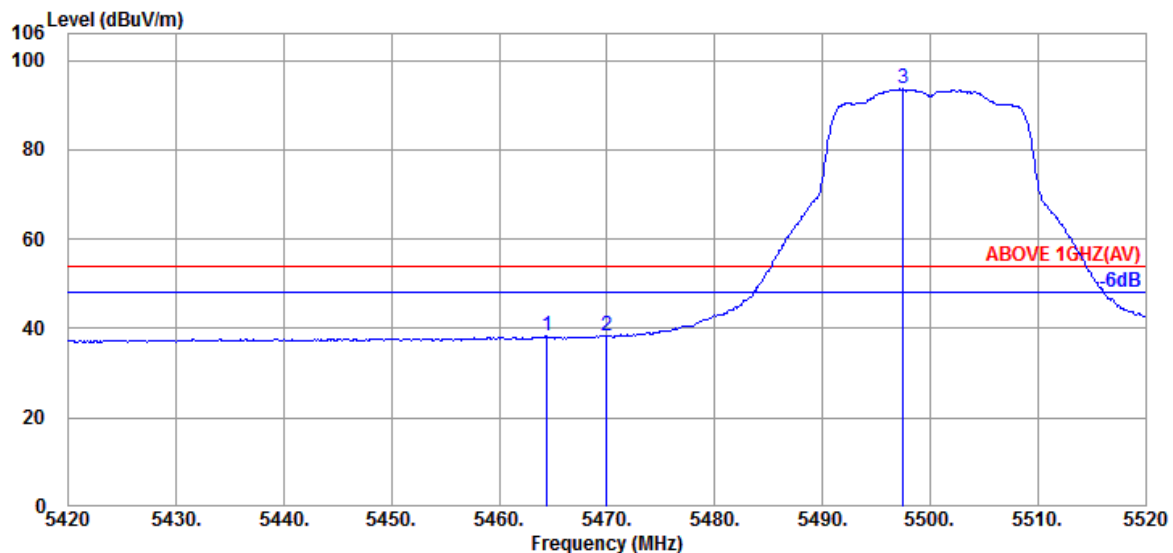


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.400	34.67	10.91	34.28	26.96	38.26	54.00	10.08	Average
5470.000	34.67	10.91	34.28	26.89	38.19	54.00	10.22	Average
@ 5497.500	34.60	10.93	34.27	82.31	93.57	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Band	NII-2C
		Frequency	TX 5700MHz

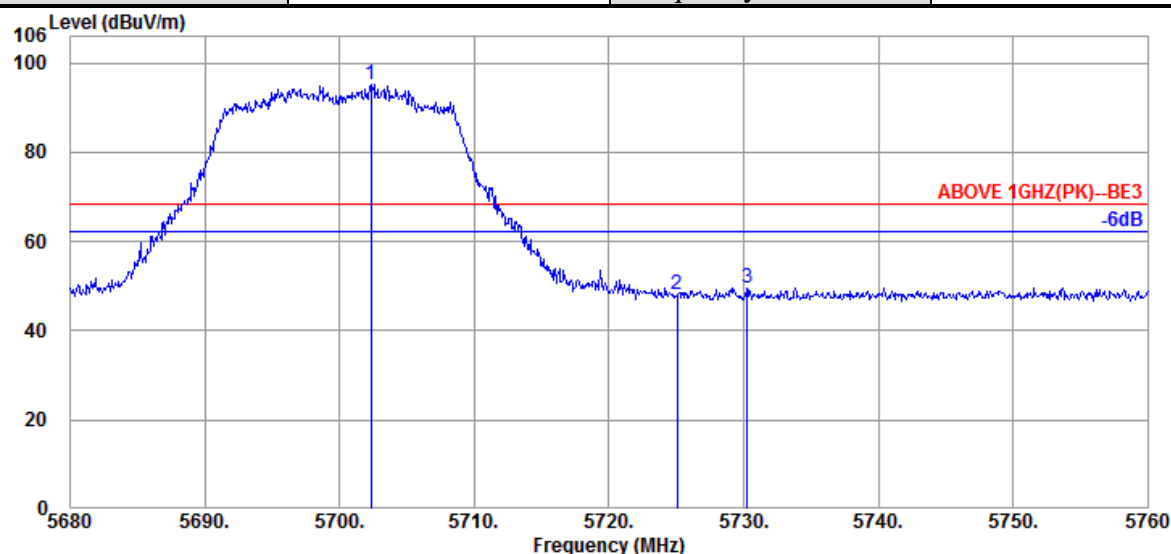

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.320	34.80	11.03	34.36	83.57	95.04	---	---	Peak
5725.040	34.80	11.05	34.37	36.58	48.06	68.20	14.82	Peak
5730.240	34.80	11.05	34.38	38.27	49.74	68.20	12.51	Peak

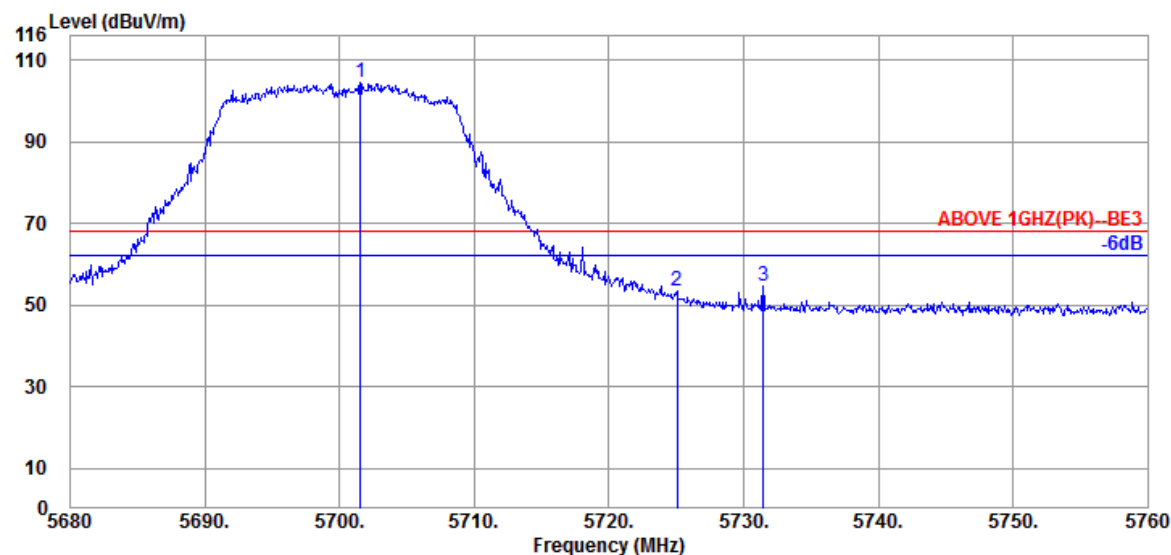


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5701.520	34.80	11.03	34.36	93.13	104.60	---	---	Peak
5725.040	34.80	11.05	34.37	41.80	53.28	68.20	14.73	Peak
5731.440	34.80	11.05	34.38	43.21	54.68	68.20	12.46	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Band	NII-2C
		Frequency	TX 5720MHz

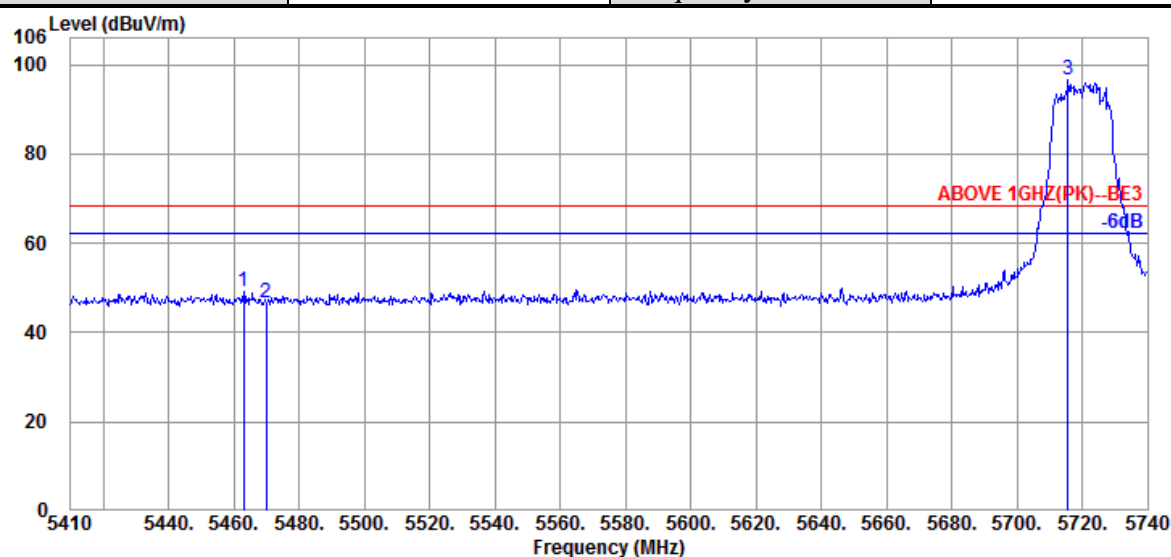

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.130	34.70	10.91	34.28	37.86	49.19	68.20	12.91	Peak
5470.060	34.67	10.91	34.28	35.45	46.75	68.20	14.38	Peak
@ 5715.580	34.80	11.05	34.37	85.12	96.60	---	---	Peak

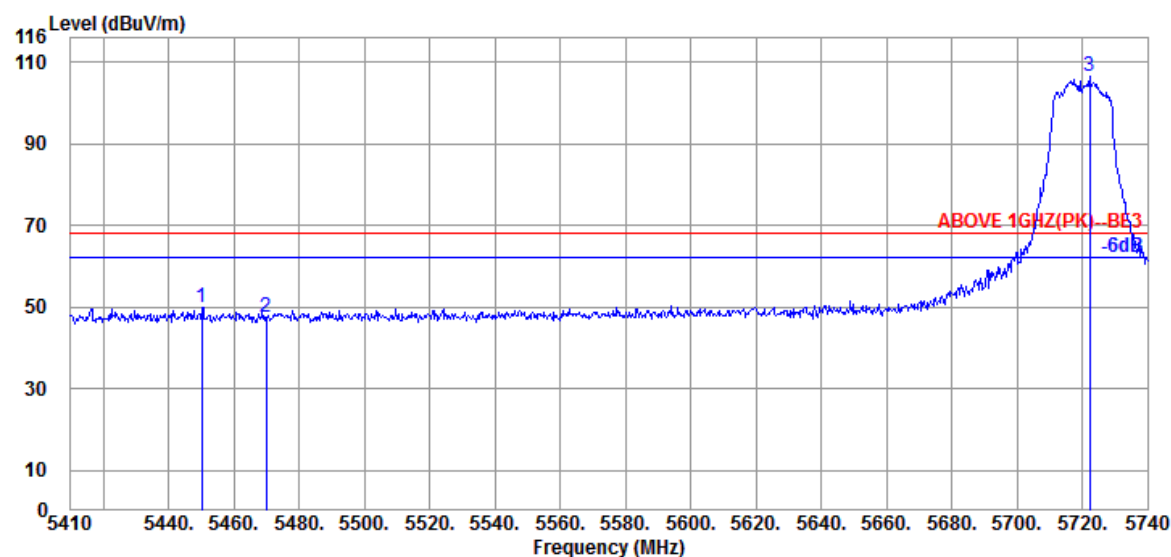

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.260	34.70	10.89	34.29	38.76	50.06	68.20	12.55	Peak
5470.060	34.67	10.91	34.28	36.39	47.69	68.20	14.96	Peak
@ 5722.180	34.80	11.05	34.37	95.21	106.69	---	---	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	Band	NII-2C
		Frequency	TX 5720MHz

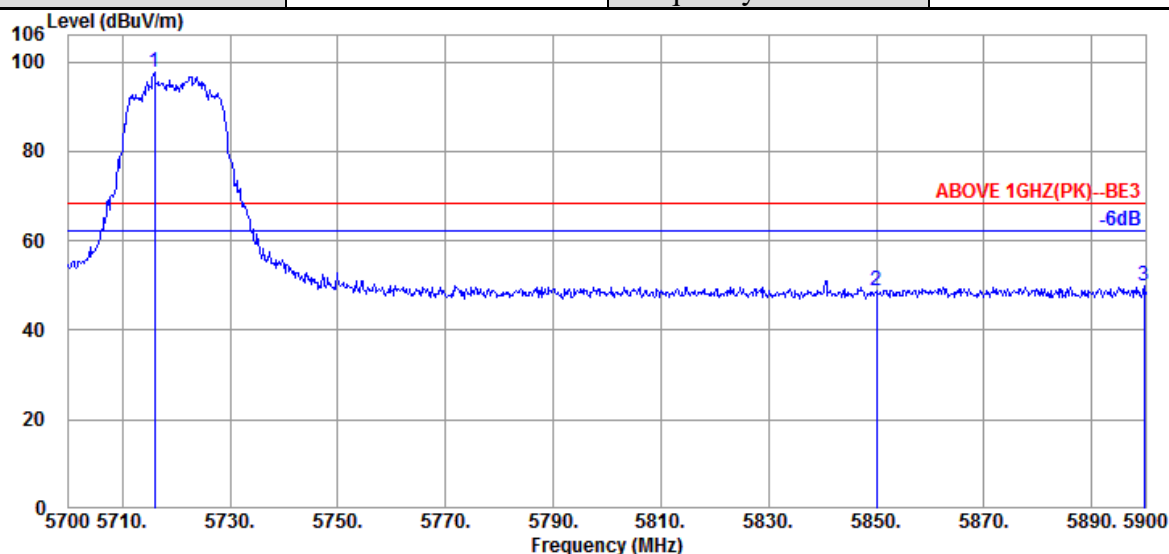

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5716.000	34.80	11.05	34.37	86.07	97.55	---	---	Peak
5850.000	35.40	11.10	34.43	36.66	48.73	68.20	14.82	Peak
5899.800	35.40	11.14	34.46	37.88	49.96	68.20	12.11	Peak

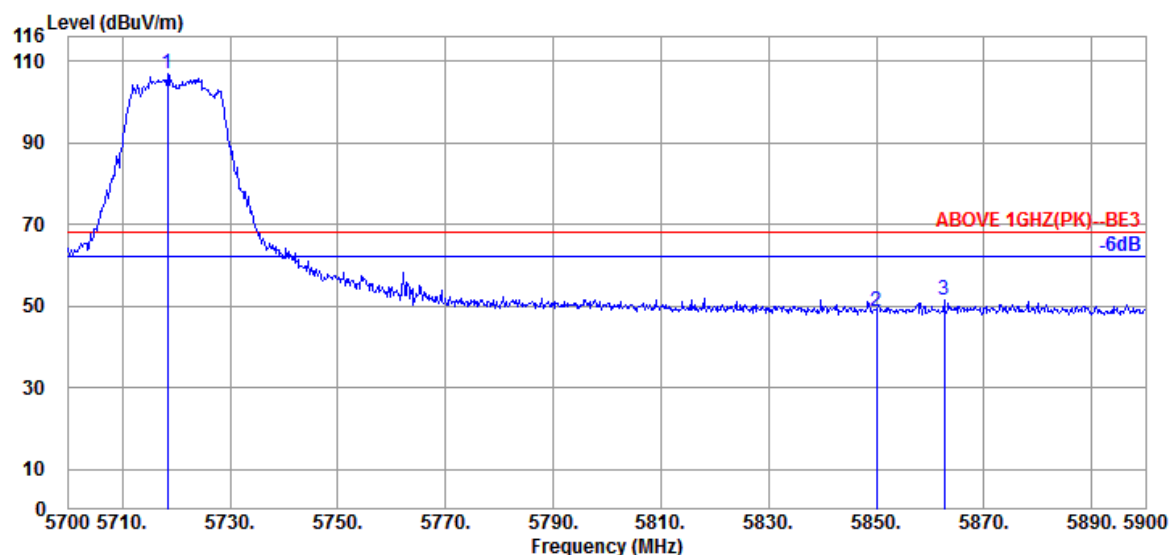

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5718.400	34.80	11.05	34.37	95.46	106.94	---	---	Peak
5850.000	35.40	11.10	34.43	36.79	48.86	68.20	15.30	Peak
5862.600	35.40	11.12	34.44	39.57	51.65	68.20	12.61	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Band	NII-III
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

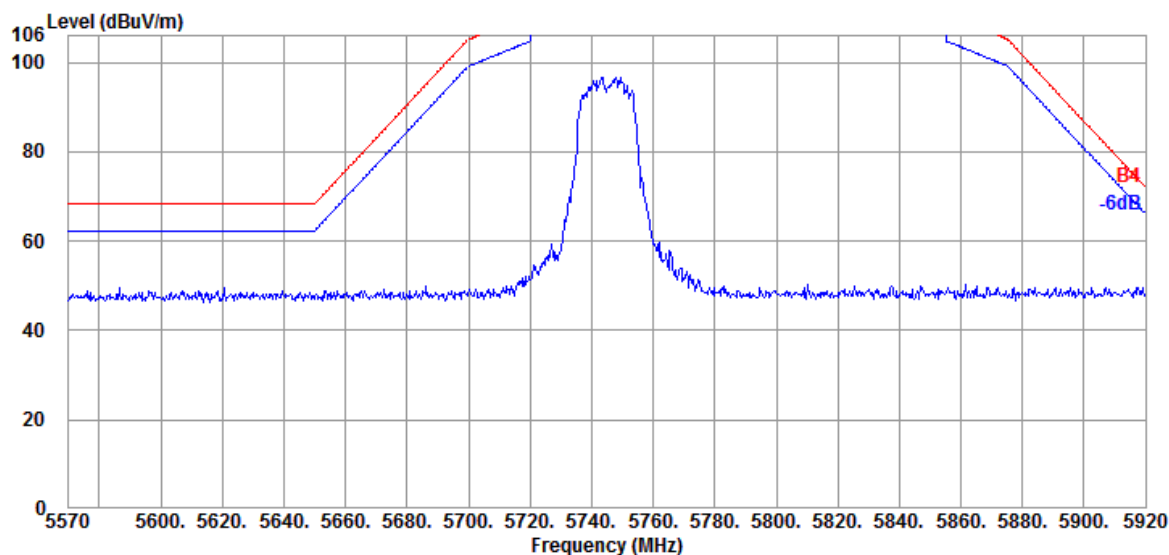

Antenna at Vertical Polarization

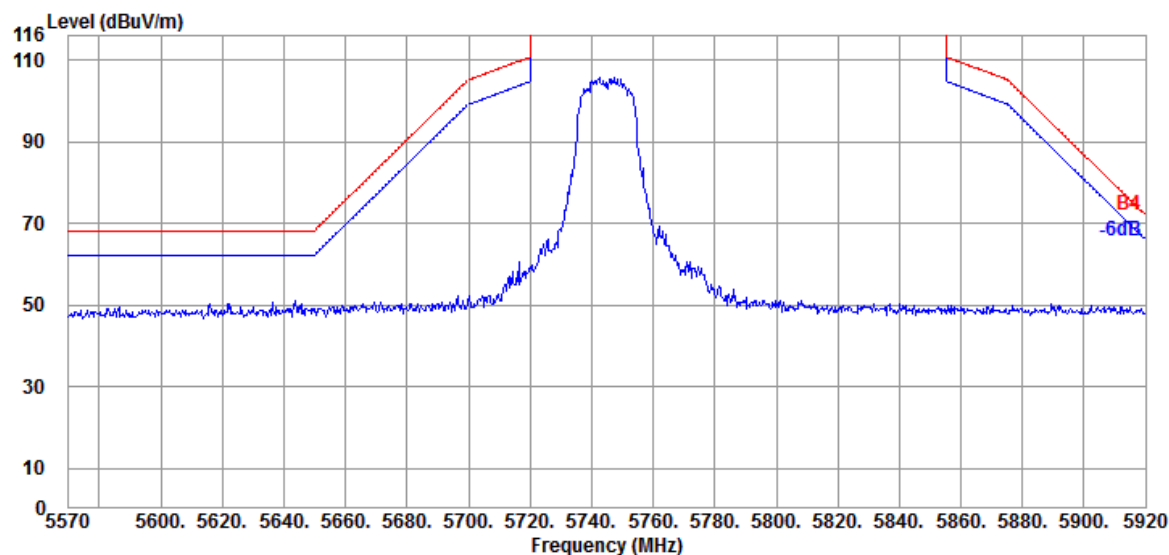


Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Band	NII-III
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

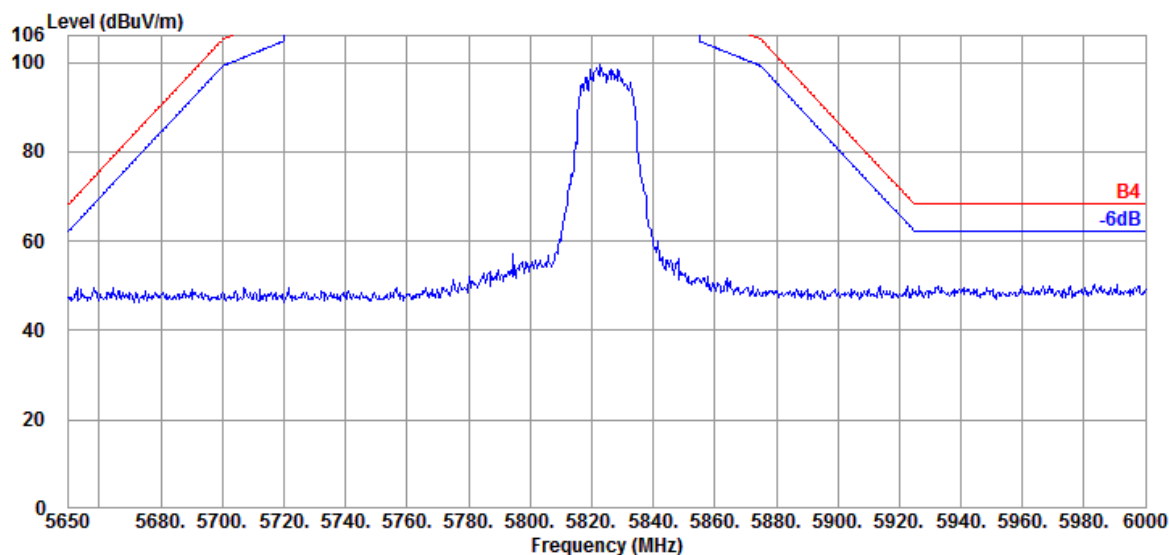

Antenna at Vertical Polarization

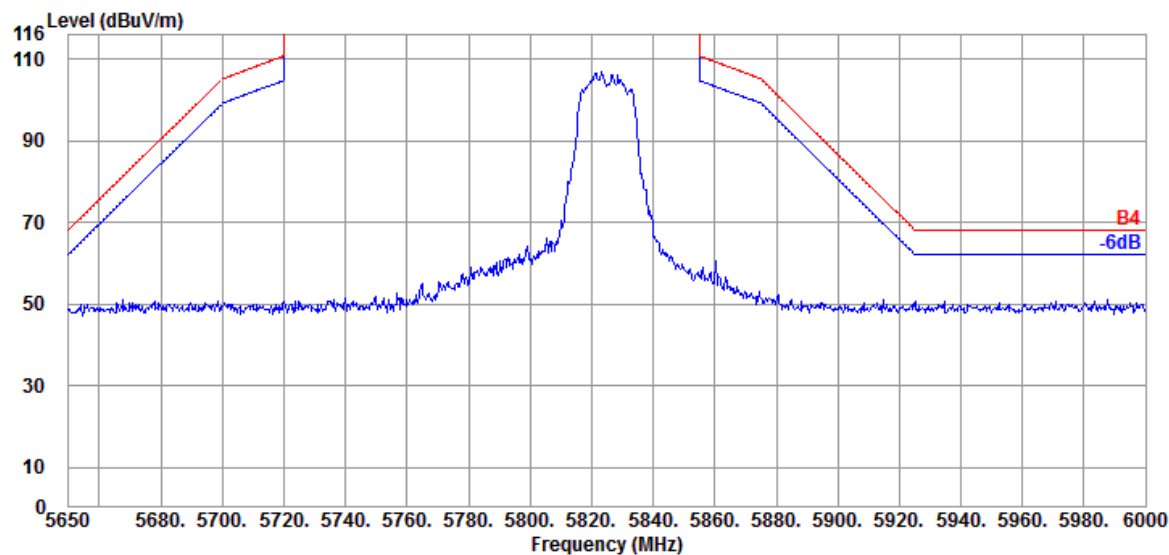


Mode	802.11n-HT40	Band	NII-I
		Frequency	TX 5190MHz

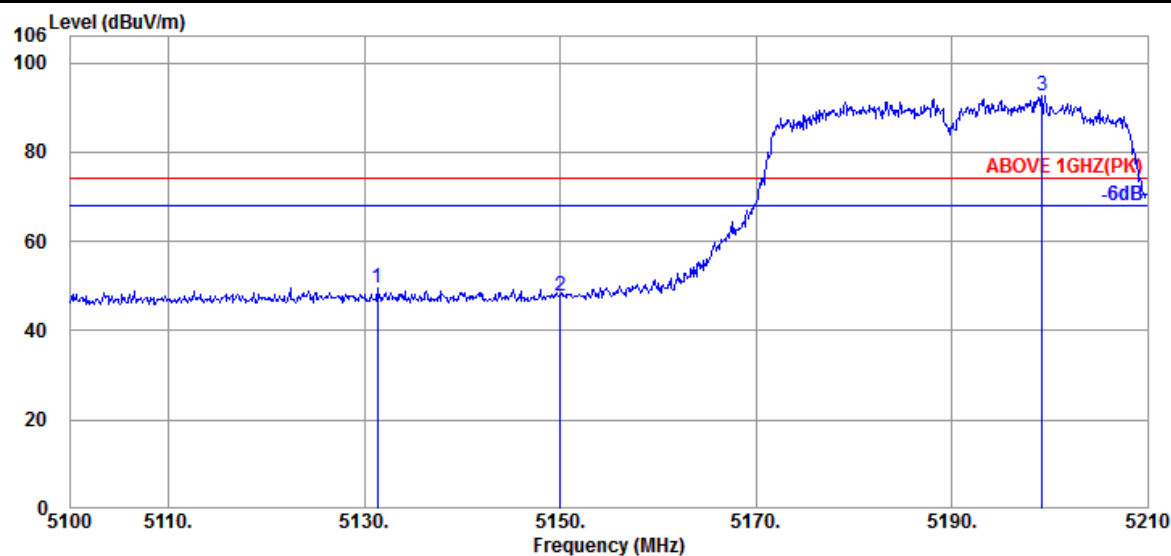

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5131.350	34.37	10.70	34.39	38.93	49.61	74.00	19.64	Peak
5150.050	34.40	10.70	34.38	37.06	47.78	74.00	20.27	Peak
@ 5199.220	34.50	10.74	34.36	81.77	92.65	---	---	Peak

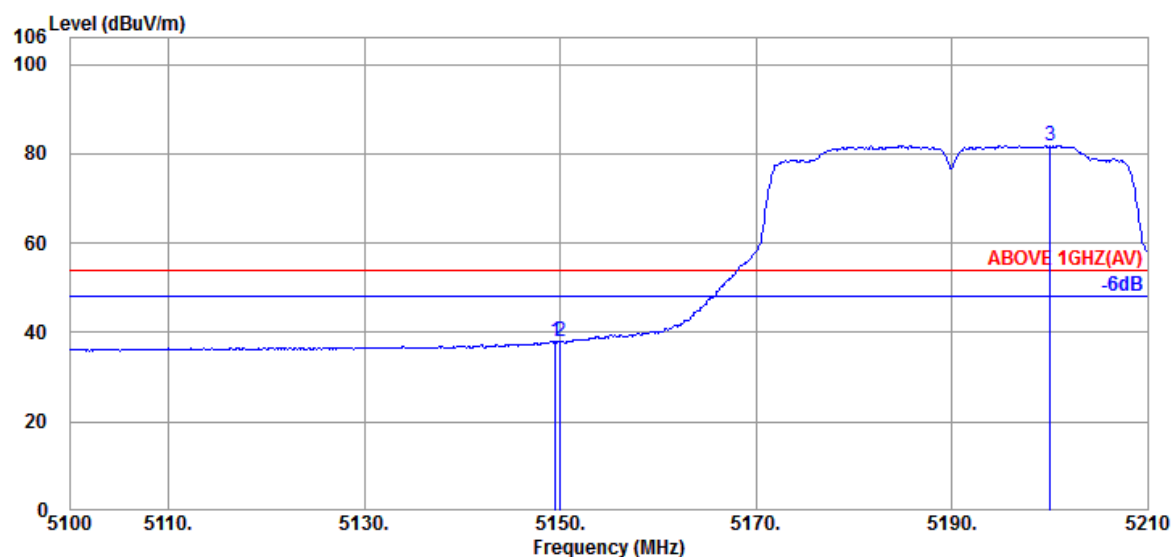

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	34.40	10.70	34.38	27.41	38.13	54.00	11.25	Average
5150.050	34.40	10.70	34.38	27.21	37.93	54.00	11.44	Average
@ 5200.100	34.50	10.74	34.36	70.85	81.73	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	Band	NII-I
		Frequency	TX 5190MHz

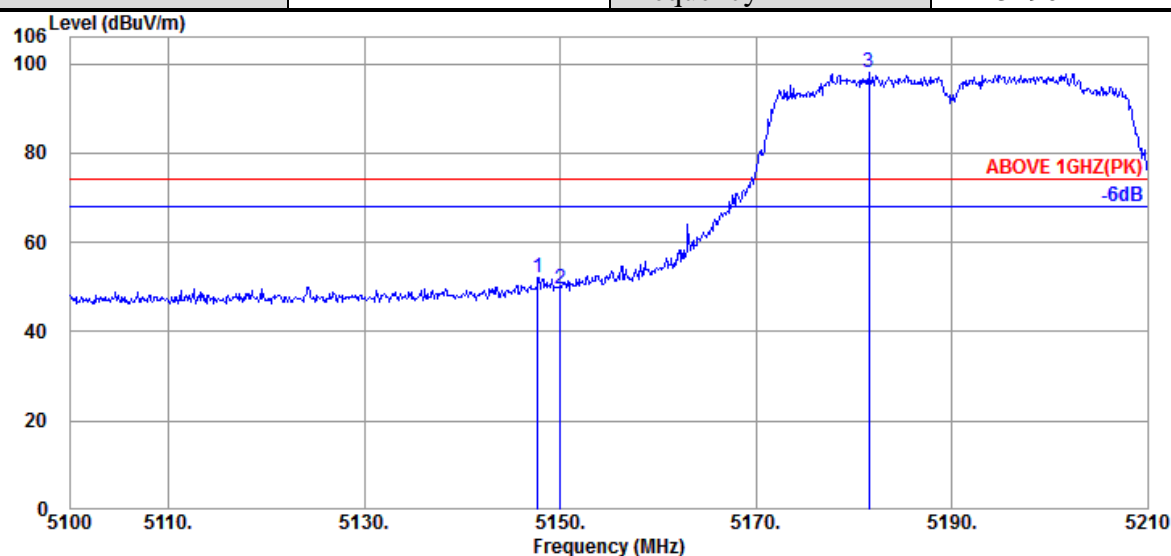

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.740	34.40	10.70	34.38	41.25	51.97	74.00	19.07	Peak
5150.050	34.40	10.70	34.38	38.99	49.71	74.00	20.03	Peak
@ 5181.510	34.47	10.72	34.37	87.40	98.22	---	---	Peak

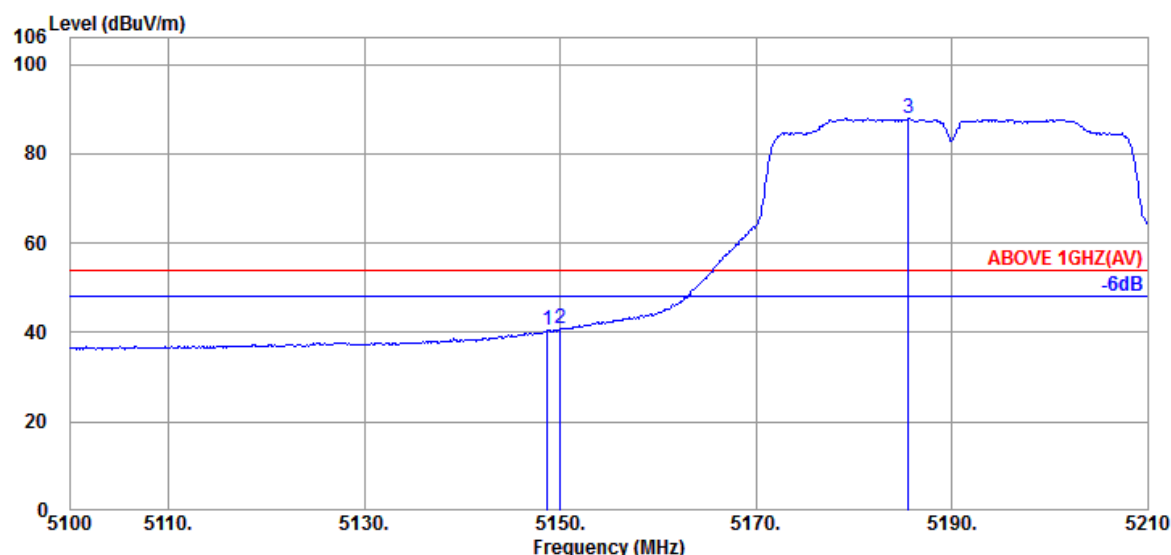

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.730	34.40	10.70	34.38	29.76	40.48	54.00	10.74	Average
5150.050	34.40	10.70	34.38	30.01	40.73	54.00	10.74	Average
@ 5185.580	34.47	10.72	34.37	77.03	87.85	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM2010181

Report Number: EM-F200514

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	Band	NII-2A
		Frequency	TX 5310MHz

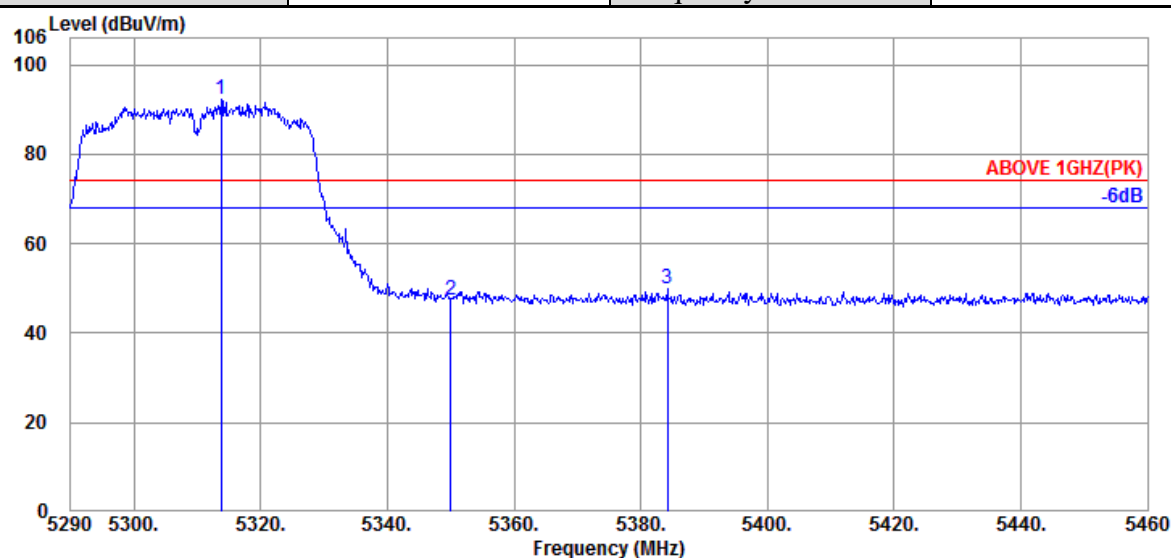

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5313.800	34.60	10.81	34.33	81.16	92.24	---	---	Peak
	5350.010	34.60	10.83	34.31	36.32	47.44	74.00	21.16	Peak
	5384.180	34.60	10.85	34.30	38.85	50.00	74.00	18.69	Peak

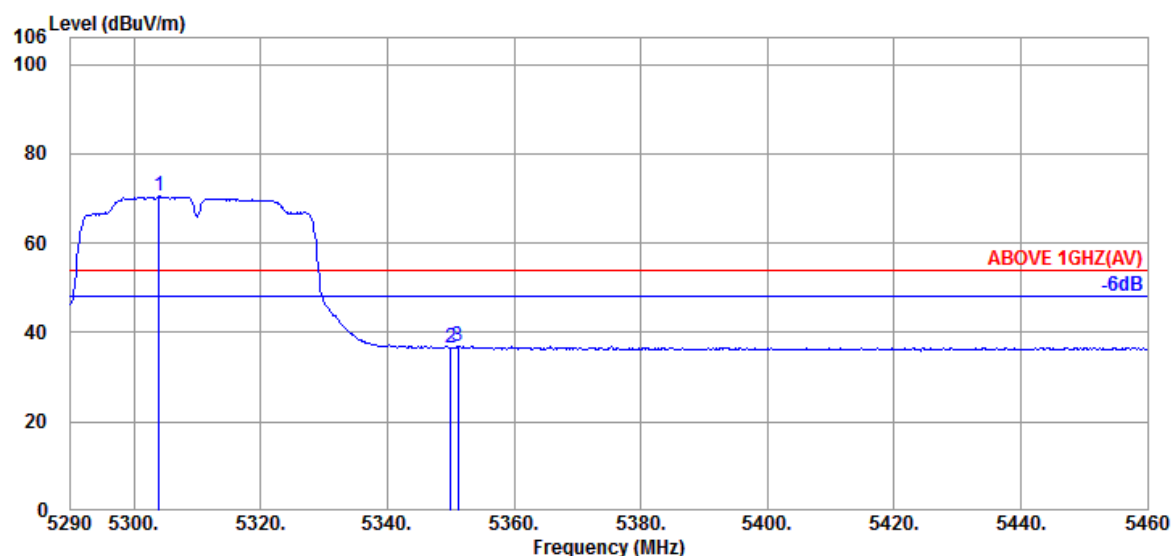

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5303.940	34.60	10.81	34.33	59.33	70.41	---	---	Average
	5350.010	34.60	10.83	34.31	25.53	36.65	54.00	10.83	Average
	5351.200	34.60	10.83	34.31	25.73	36.85	54.00	10.14	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM2010181

Report Number: EM-F200514


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11n-HT40	Band	NII-2A
		Frequency	TX 5310MHz

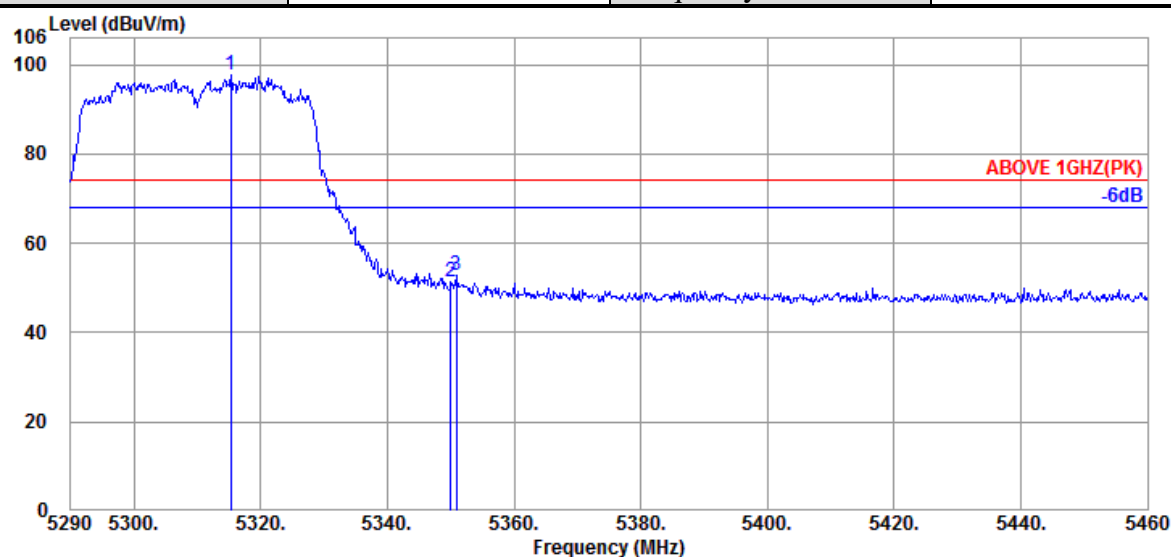

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5315.330	34.60	10.81	34.33	86.68	97.76	---	---	Peak
	5350.010	34.60	10.83	34.31	40.15	51.27	74.00	20.55	Peak
	5350.860	34.60	10.83	34.31	41.70	52.82	74.00	18.24	Peak

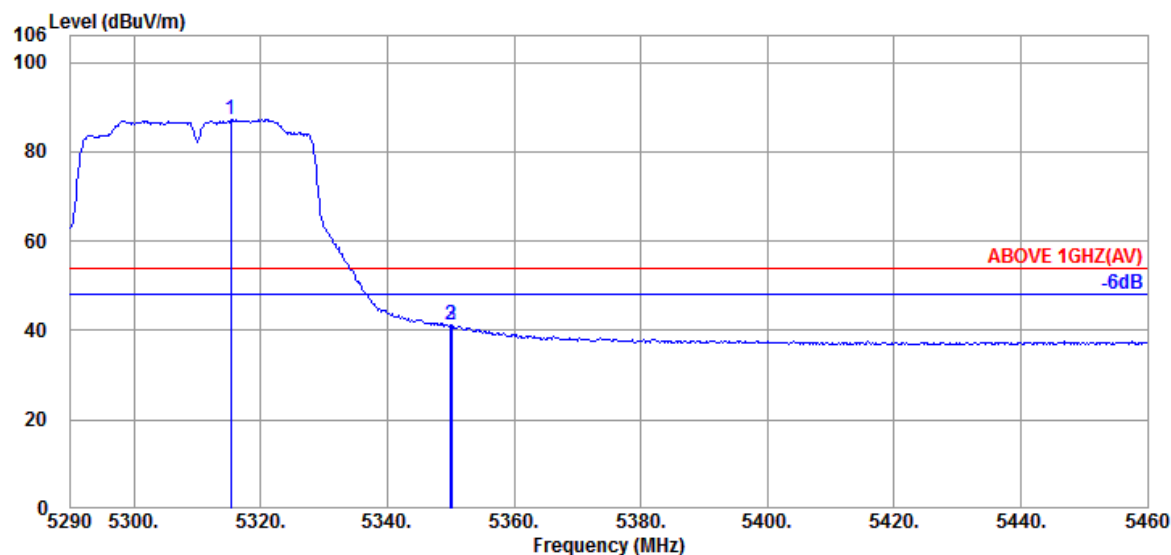

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5315.330	34.60	10.81	34.33	76.06	87.14	---	---	Average
	5350.010	34.60	10.83	34.31	30.12	41.24	54.00	10.56	Average
	5350.180	34.60	10.83	34.31	30.15	41.27	54.00	10.14	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	Band	NII-2C
		Frequency	TX 5510MHz

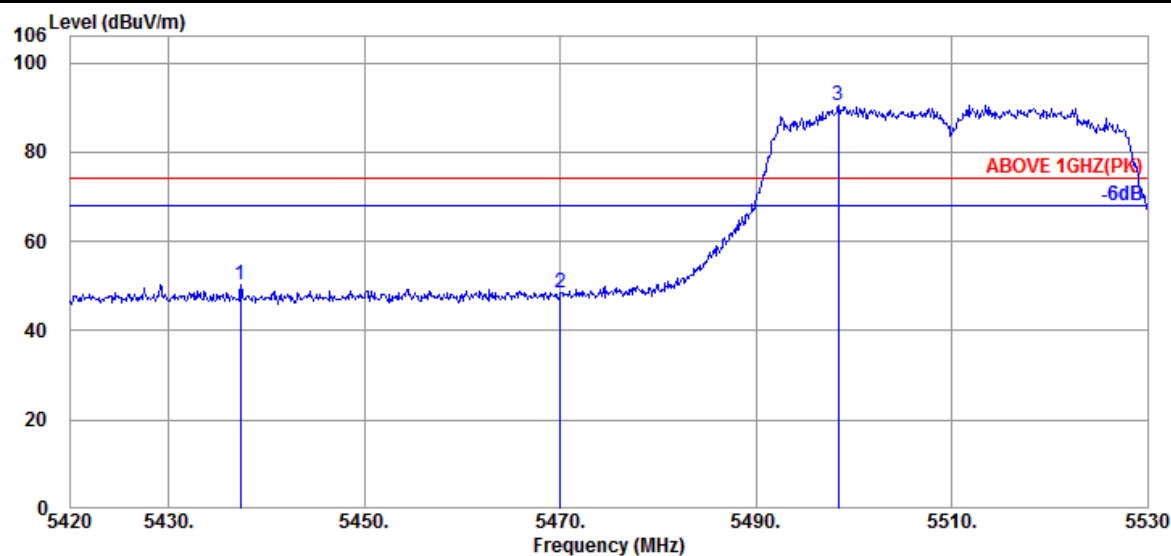

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5437.380	34.67	10.89	34.29	39.15	50.42	74.00	18.48	Peak
5470.050	34.67	10.91	34.28	37.27	48.57	74.00	20.25	Peak
@ 5498.430	34.60	10.93	34.27	79.15	90.41	---	---	Peak

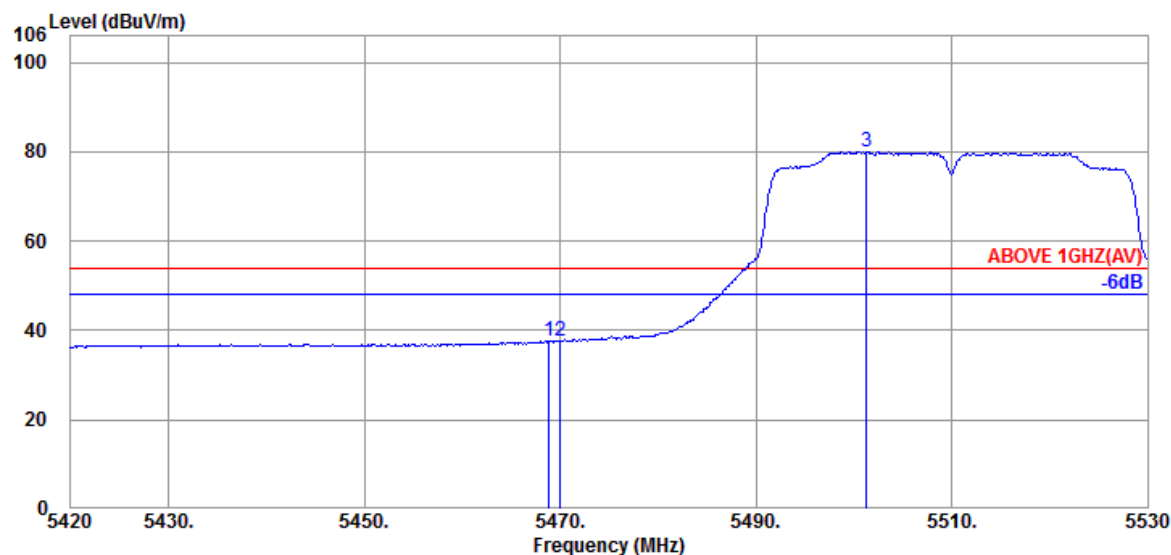

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.840	34.67	10.91	34.28	26.24	37.54	54.00	10.25	Average
5470.050	34.67	10.91	34.28	26.28	37.58	54.00	10.66	Average
@ 5501.290	34.60	10.93	34.27	68.78	80.04	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM2010181

Report Number: EM-F200514

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	Band	NII-2C
		Frequency	TX 5510MHz

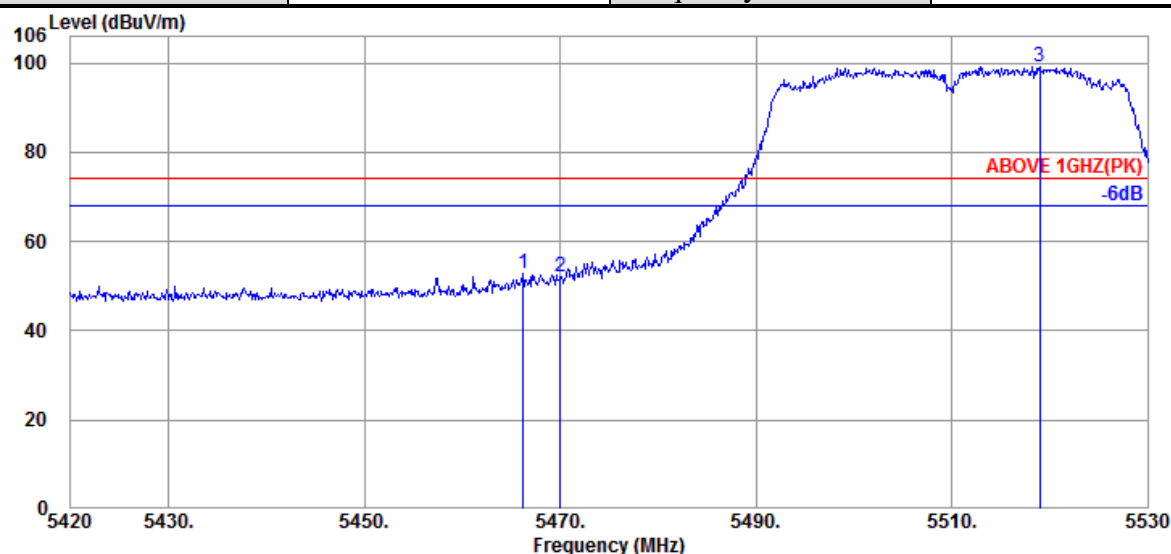

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.200	34.67	10.91	34.28	41.43	52.73	74.00	18.57	Peak
5470.050	34.67	10.91	34.28	40.69	51.99	74.00	19.44	Peak
@ 5519.000	34.60	10.93	34.28	87.85	99.10	---	---	Peak

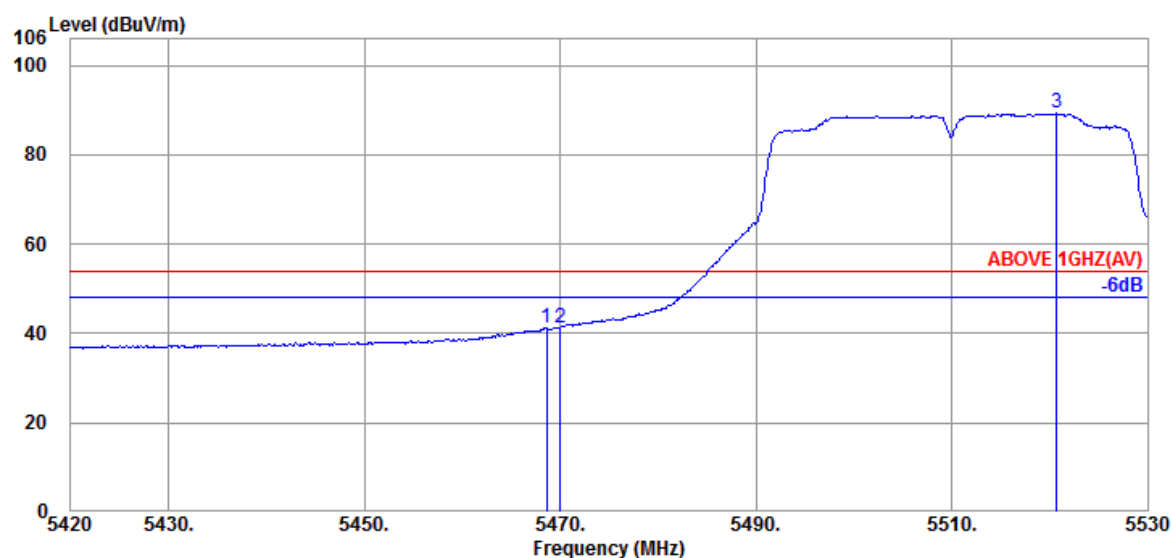

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.620	34.67	10.91	34.28	29.84	41.14	54.00	10.08	Average
5470.050	34.67	10.91	34.28	30.09	41.39	54.00	10.30	Average
@ 5520.760	34.60	10.93	34.28	78.06	89.31	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM2010181

Report Number: EM-F200514


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11n-HT40	Band	NII-2C
		Frequency	TX 5670MHz

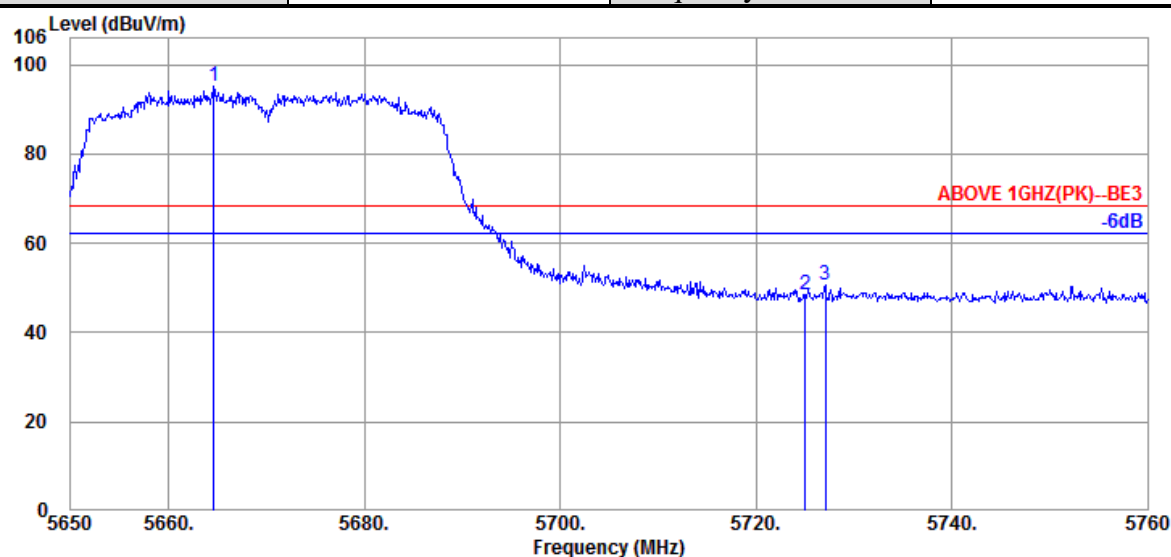

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5664.630	34.67	11.01	34.35	83.71	95.04	---	---	Peak
5725.020	34.80	11.05	34.37	37.04	48.52	68.20	14.28	Peak
5727.110	34.80	11.05	34.38	39.28	50.75	68.20	13.05	Peak

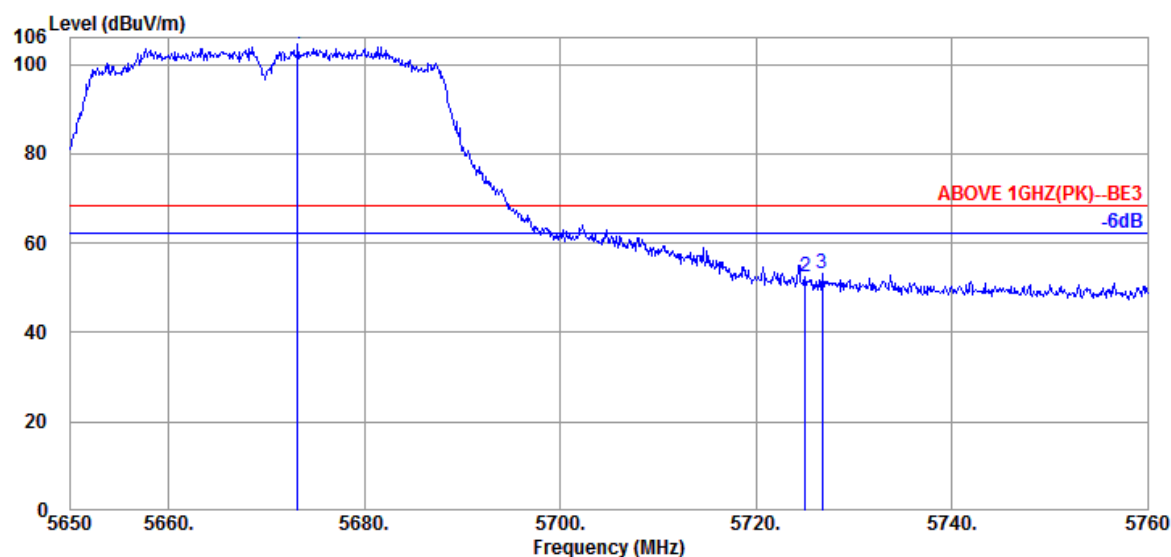

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5673.210	34.73	11.03	34.36	93.06	104.46	---	---	Peak
5725.020	34.80	11.05	34.37	40.93	52.41	68.20	13.07	Peak
5726.780	34.80	11.05	34.38	41.73	53.20	68.20	12.01	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Band	NII-2C
		Frequency	TX 5710MHz

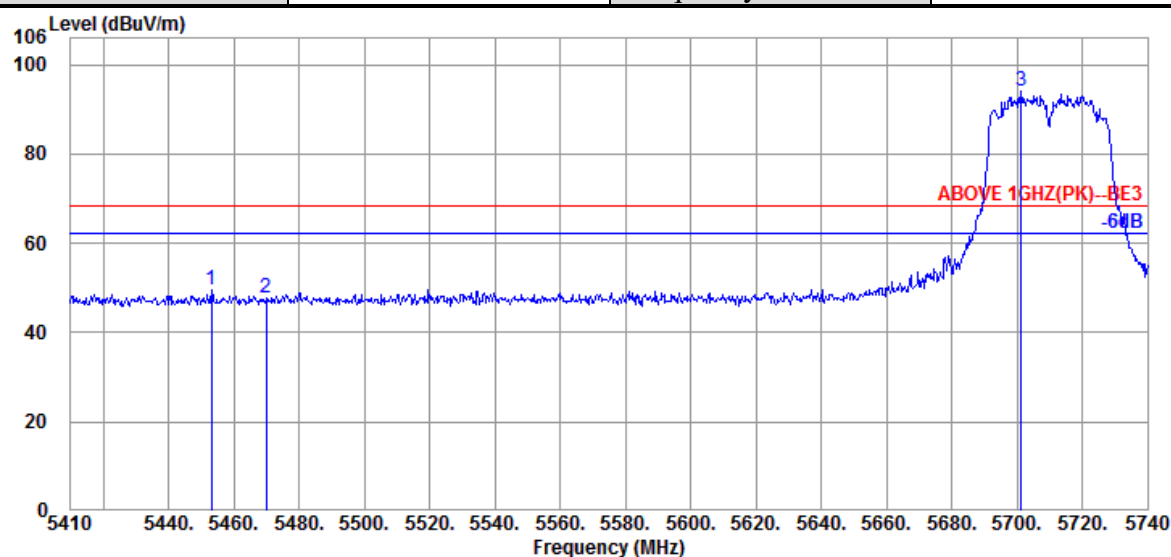

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.230	34.70	10.89	34.28	38.12	49.43	68.20	13.17	Peak
5470.060	34.67	10.91	34.28	36.53	47.83	68.20	14.59	Peak
@ 5701.390	34.80	11.03	34.36	82.74	94.21	---	---	Peak

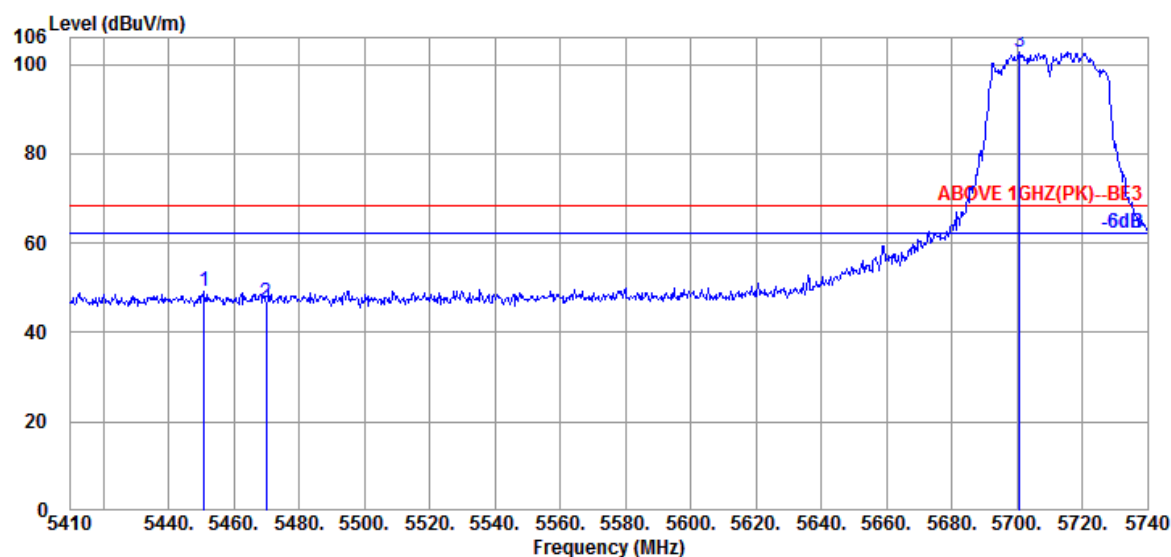

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.920	34.70	10.89	34.29	37.97	49.27	68.20	12.71	Peak
5470.060	34.67	10.91	34.28	35.48	46.78	68.20	14.27	Peak
@ 5700.730	34.80	11.03	34.36	91.26	102.73	---	---	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	Band	NII-2C
		Frequency	TX 5710MHz

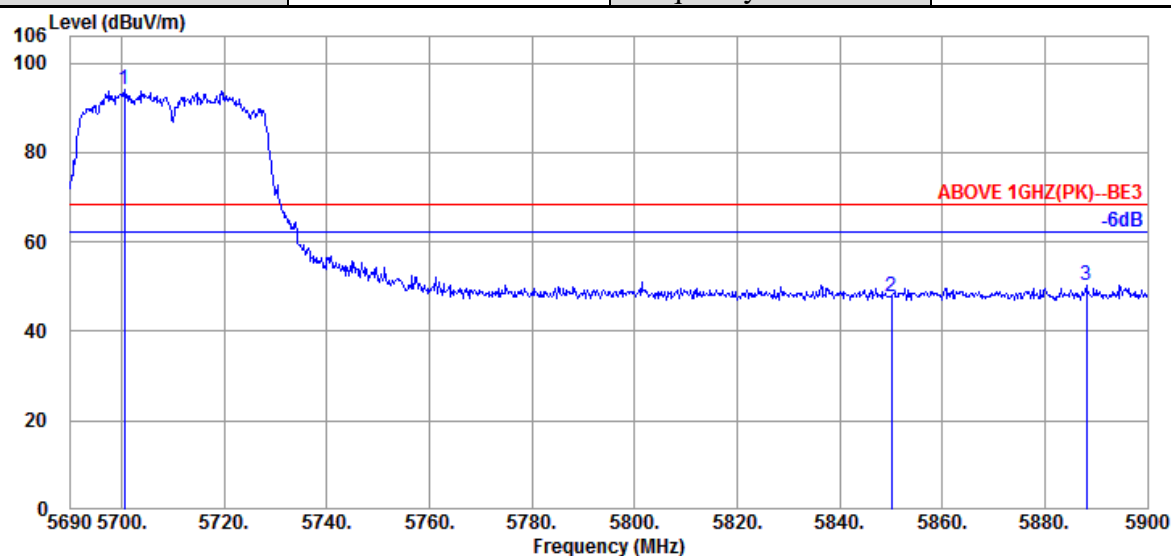

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5700.500	34.80	11.03	34.36	82.58	94.05	---	---	Peak
5850.020	35.40	11.10	34.43	35.54	47.61	68.20	14.69	Peak
5888.030	35.40	11.12	34.45	38.16	50.23	68.20	12.17	Peak

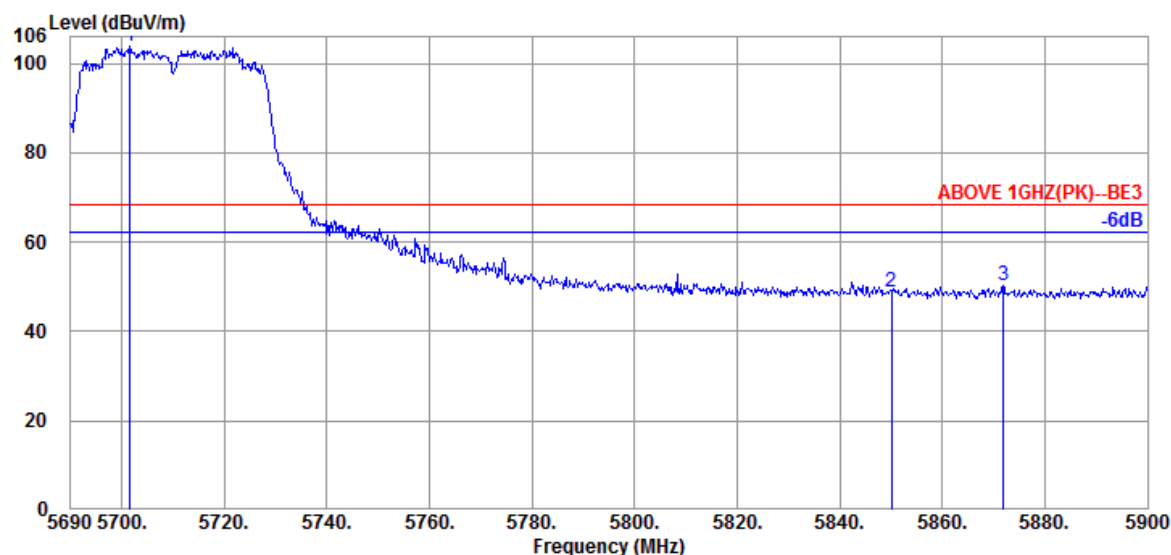

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5701.550	34.80	11.03	34.36	92.25	103.72	---	---	Peak
5850.020	35.40	11.10	34.43	36.75	48.82	68.20	14.58	Peak
5871.860	35.40	11.12	34.44	38.08	50.16	68.20	12.56	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Band	NII-III
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

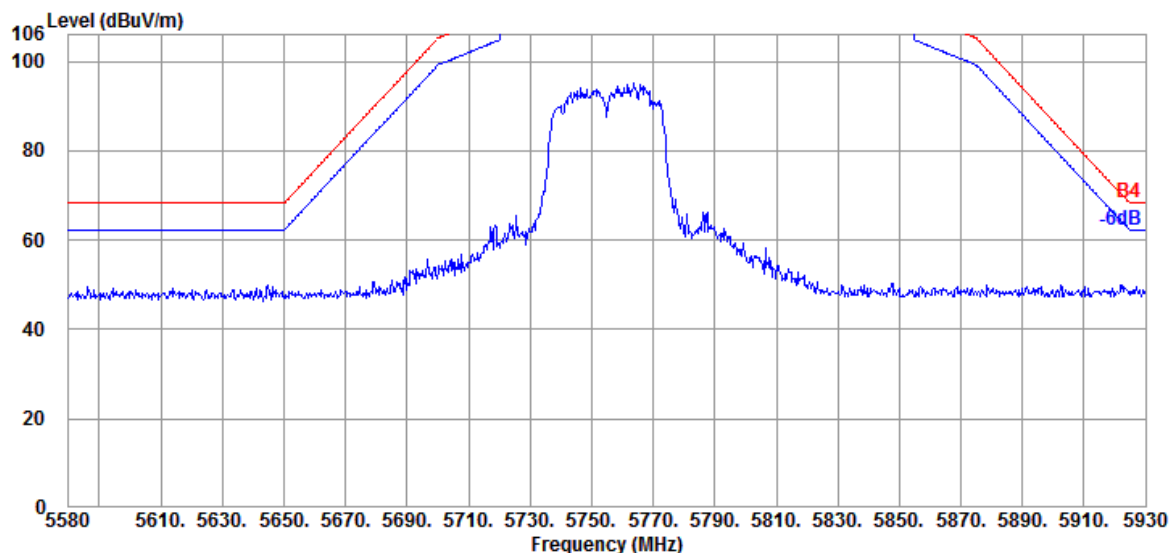

Antenna at Vertical Polarization

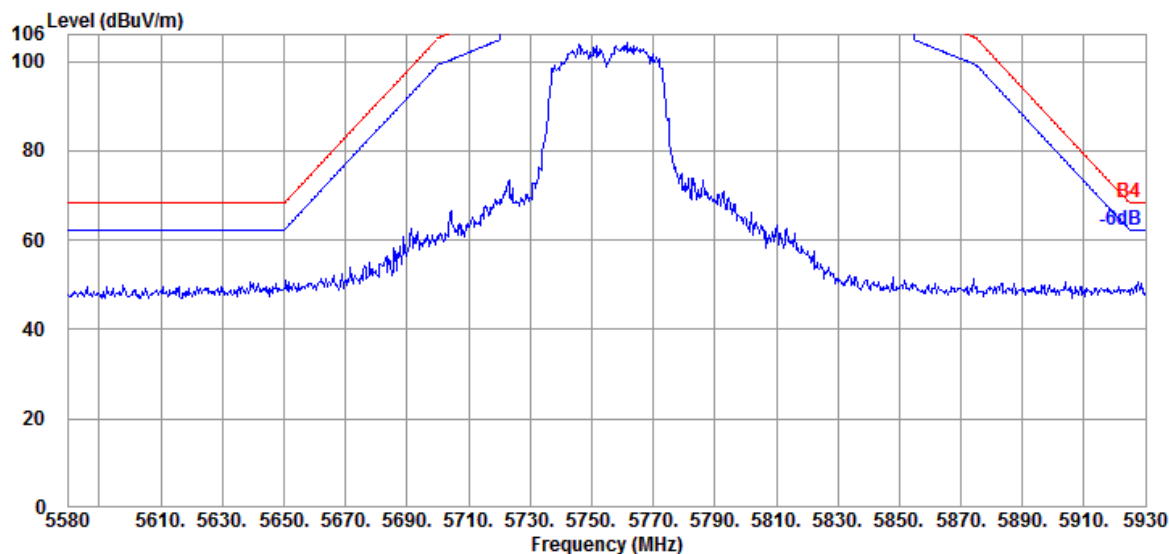


Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Band	NII-III
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

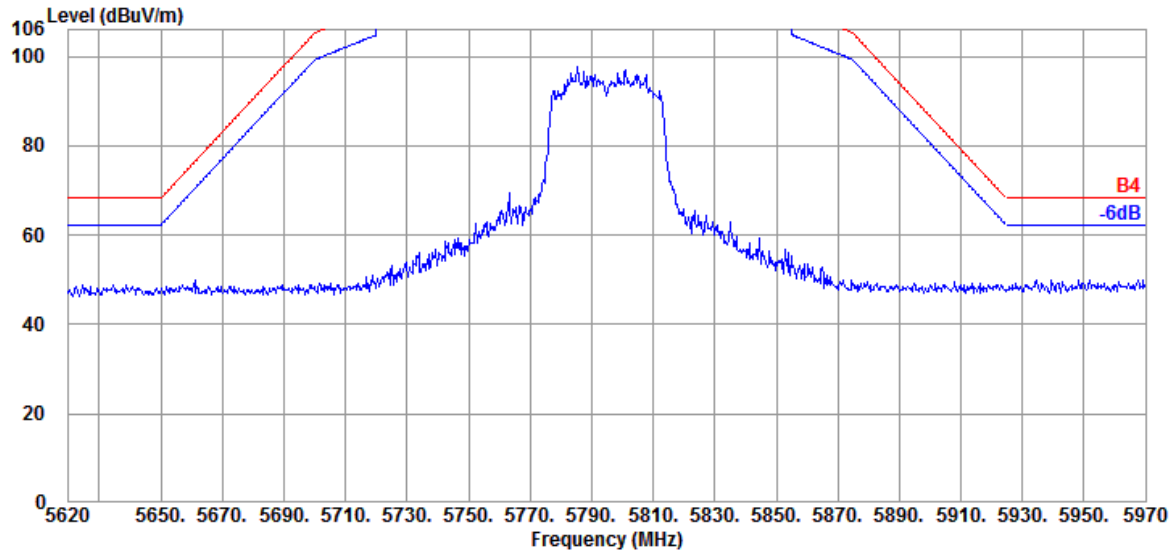

Antenna at Vertical Polarization

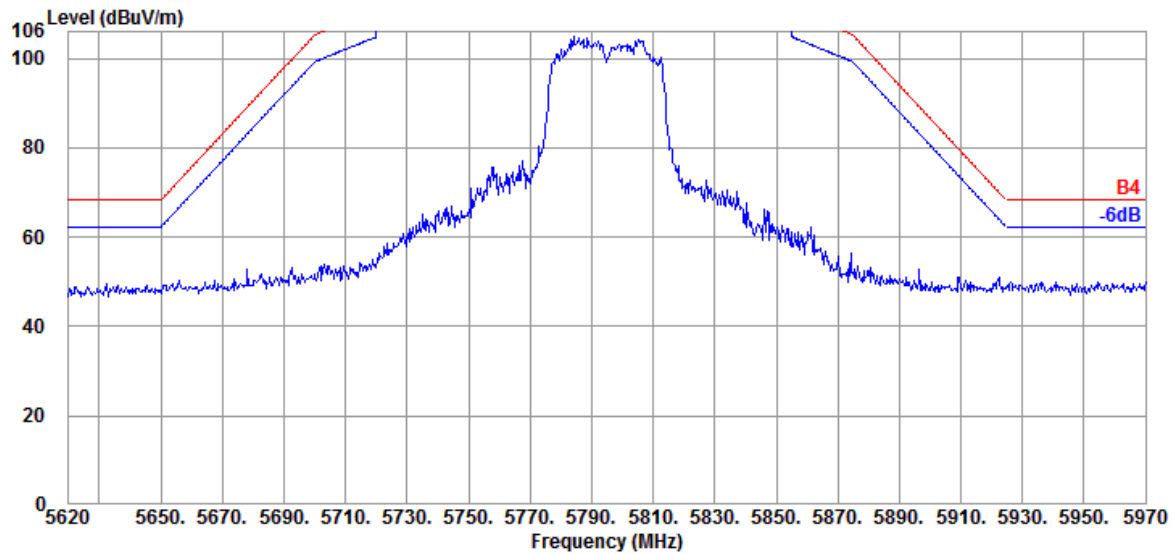

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	Band	NII-I
		Frequency	TX 5210MHz

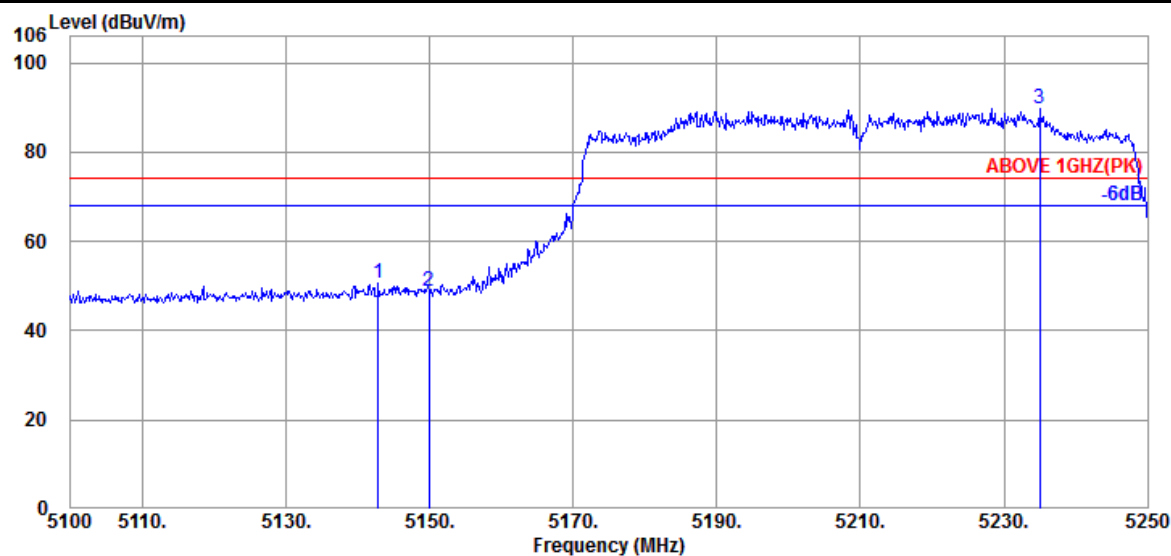

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.900	34.40	10.70	34.38	39.81	50.53	74.00	19.23	Peak
5149.950	34.40	10.70	34.38	38.18	48.90	74.00	21.72	Peak
@ 5235.000	34.50	10.76	34.35	78.90	89.81	---	---	Peak

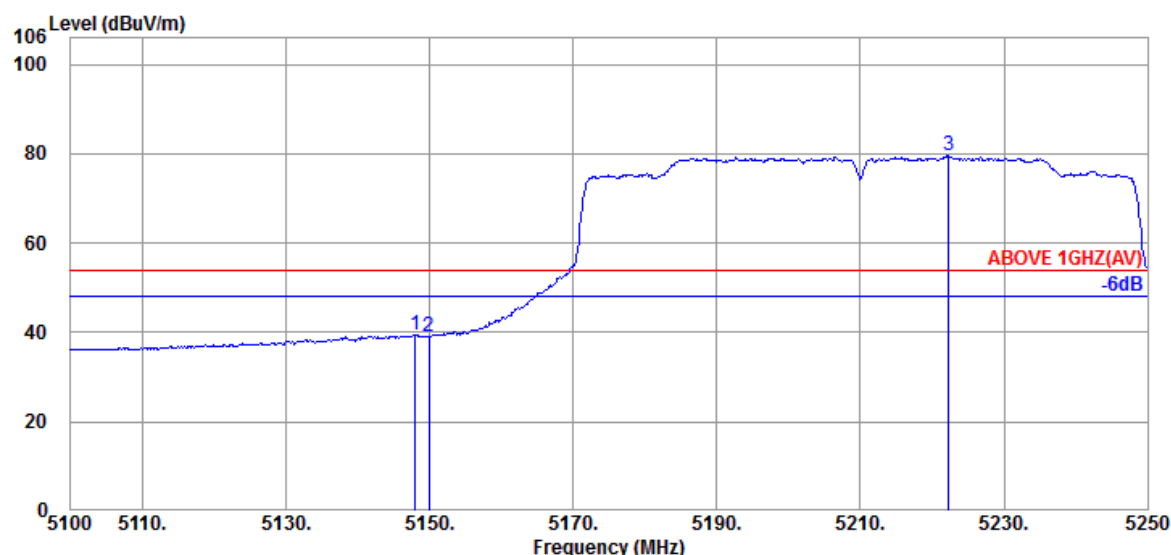

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.000	34.40	10.70	34.38	28.89	39.61	54.00	10.61	Average
5149.950	34.40	10.70	34.38	28.45	39.17	54.00	11.17	Average
@ 5222.250	34.50	10.76	34.36	68.62	79.52	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM2010181

Report Number: EM-F200514


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ac-VHT80	Band	NII-I
		Frequency	TX 5210MHz

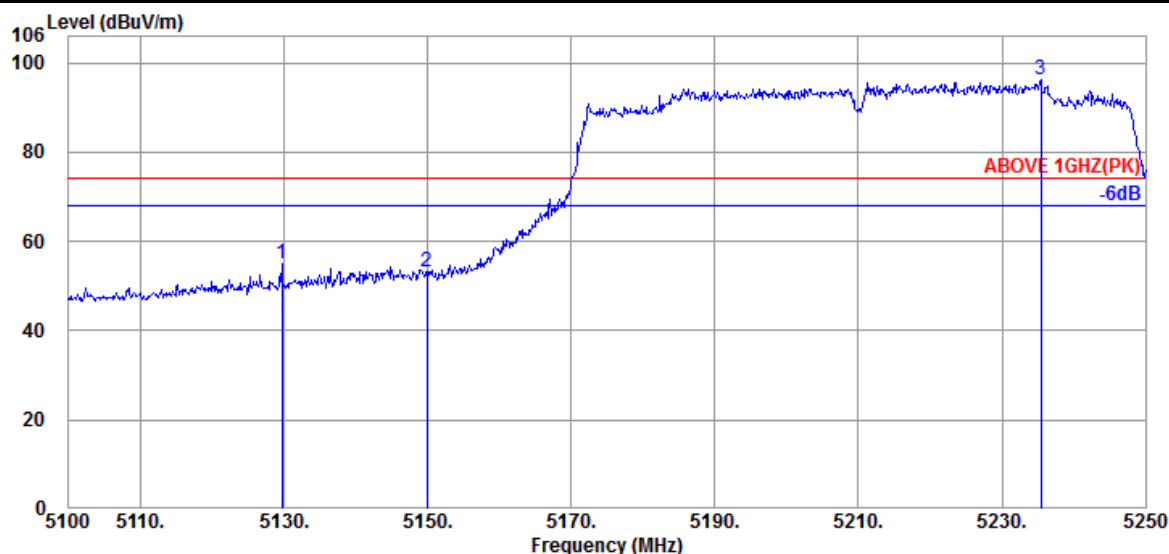

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5129.700	34.37	10.70	34.39	44.14	54.82	74.00	19.08	Peak
5149.950	34.40	10.70	34.38	42.40	53.12	74.00	20.75	Peak
@ 5235.450	34.50	10.76	34.35	85.16	96.07	---	---	Peak

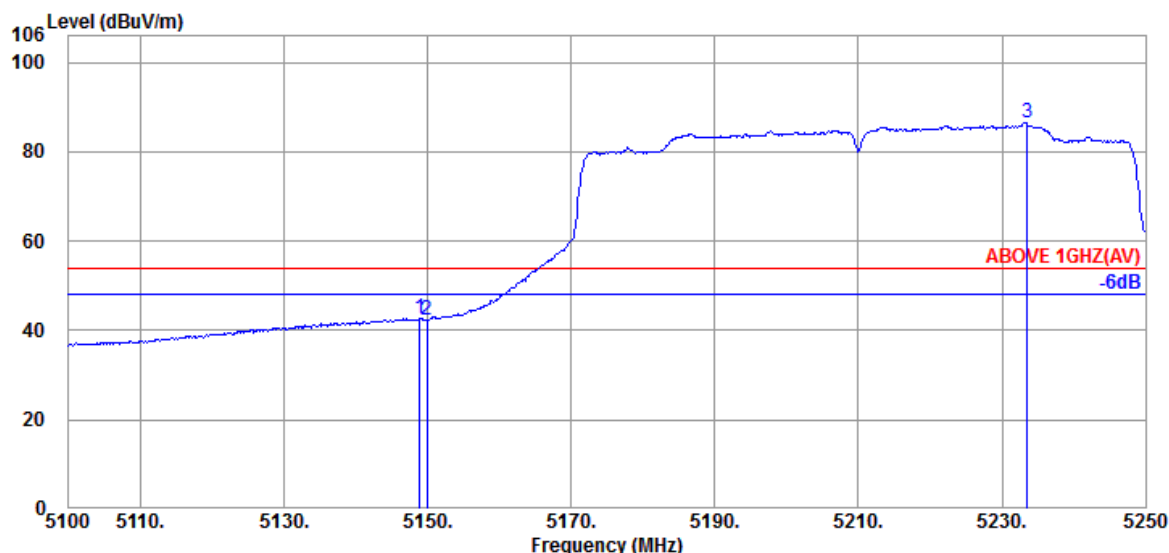

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.900	34.40	10.70	34.38	31.90	42.62	54.00	9.51	Average
5149.950	34.40	10.70	34.38	31.70	42.42	54.00	9.90	Average
@ 5233.500	34.50	10.76	34.35	75.48	86.39	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	Band	NII-2A
		Frequency	TX 5290MHz

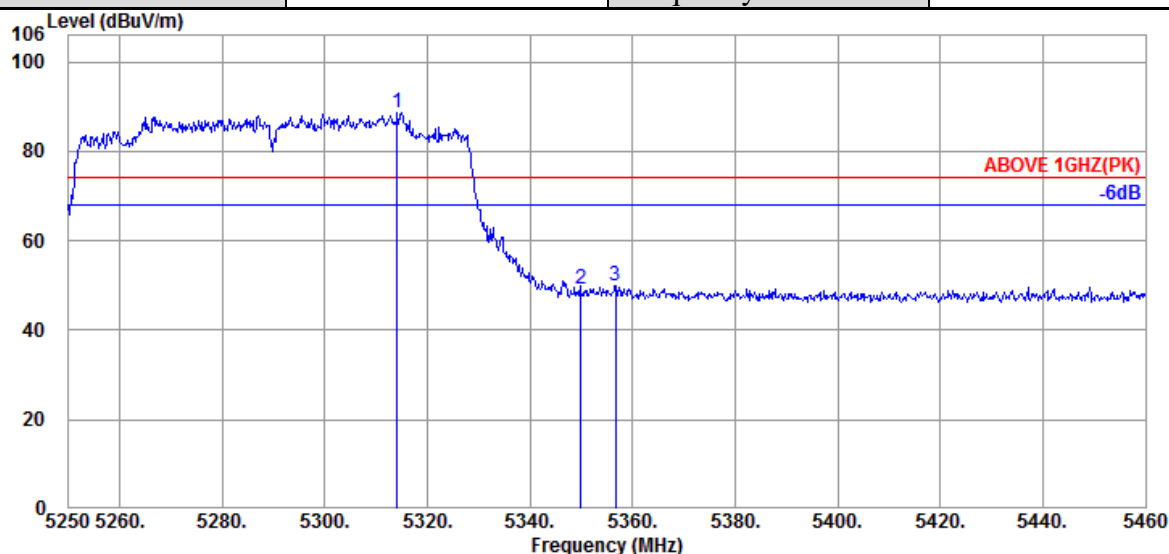

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5314.050	34.60	10.81	34.33	77.54	88.62	---	---	Peak
5349.960	34.60	10.83	34.31	38.07	49.19	74.00	20.78	Peak
5356.680	34.60	10.85	34.31	38.84	49.98	74.00	18.04	Peak

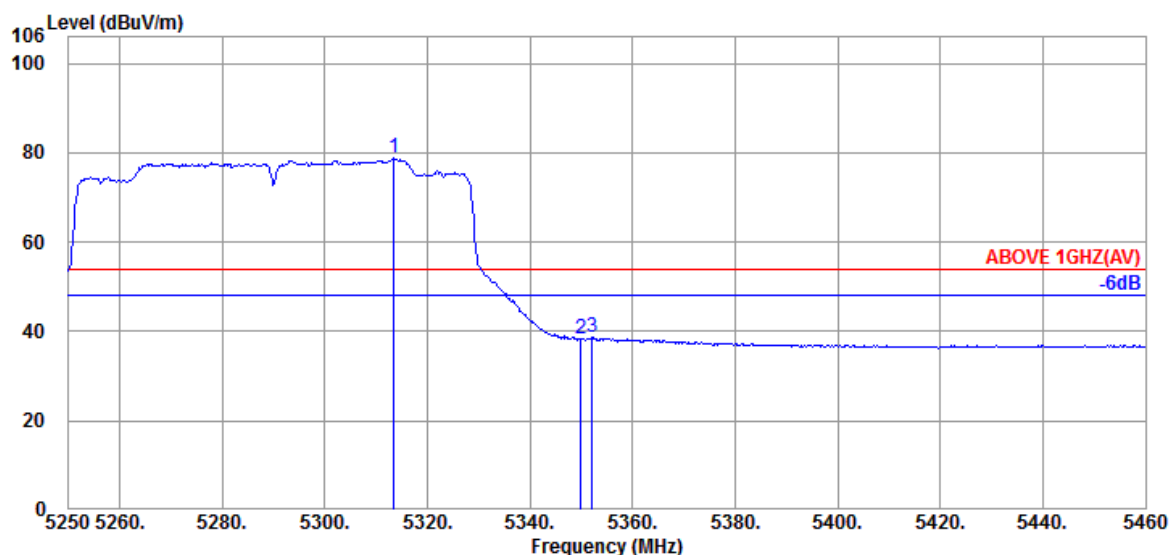

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.420	34.60	10.81	34.33	67.65	78.73	---	---	Average
5349.960	34.60	10.83	34.31	27.31	38.43	54.00	10.40	Average
5352.060	34.60	10.83	34.31	27.42	38.54	54.00	9.71	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	Band	NII-2A
		Frequency	TX 5290MHz

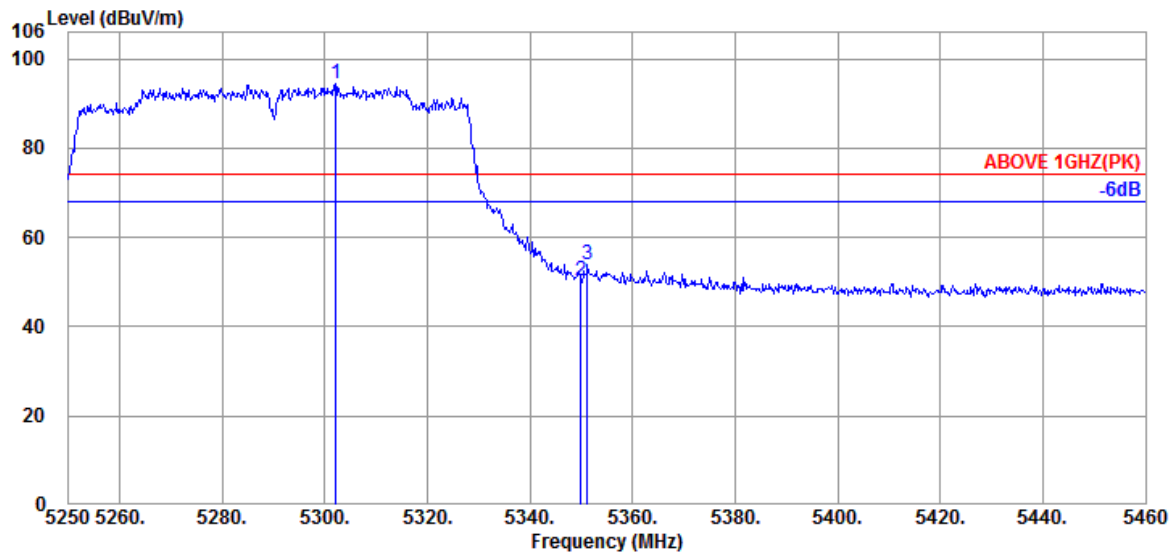

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.080	34.60	10.81	34.33	83.28	94.36	---	---	Peak
5349.960	34.60	10.83	34.31	39.28	50.40	74.00	20.46	Peak
5351.220	34.60	10.83	34.31	42.90	54.02	74.00	17.60	Peak

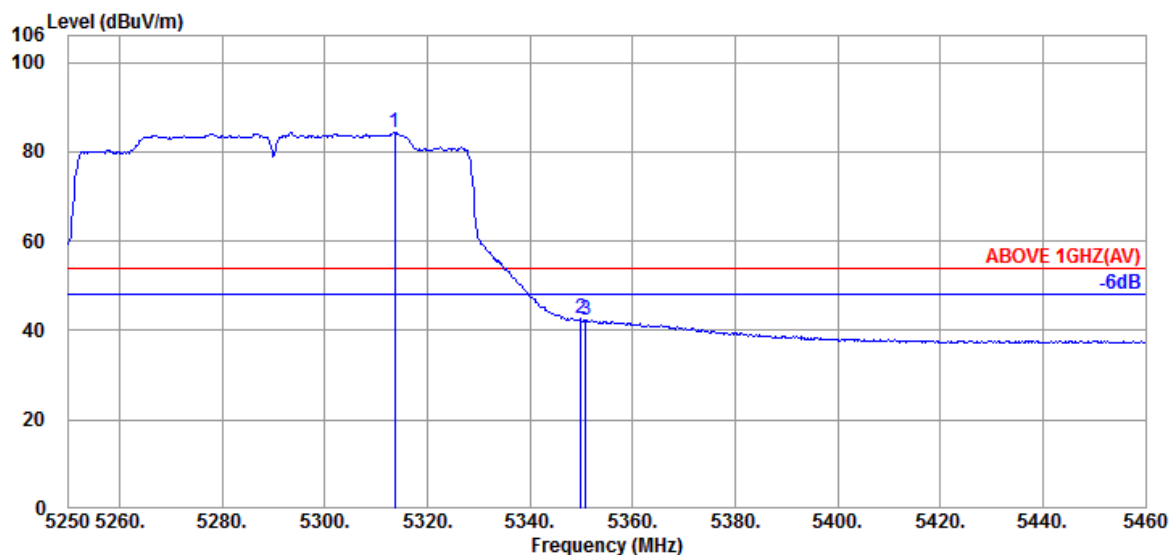

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.630	34.60	10.81	34.33	73.30	84.38	---	---	Average
5349.960	34.60	10.83	34.31	31.45	42.57	54.00	8.77	Average
5350.800	34.60	10.83	34.31	31.24	42.36	54.00	8.30	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM2010181


Report Number: EM-F200514

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	Band	NII-2C
		Frequency	TX 5530MHz

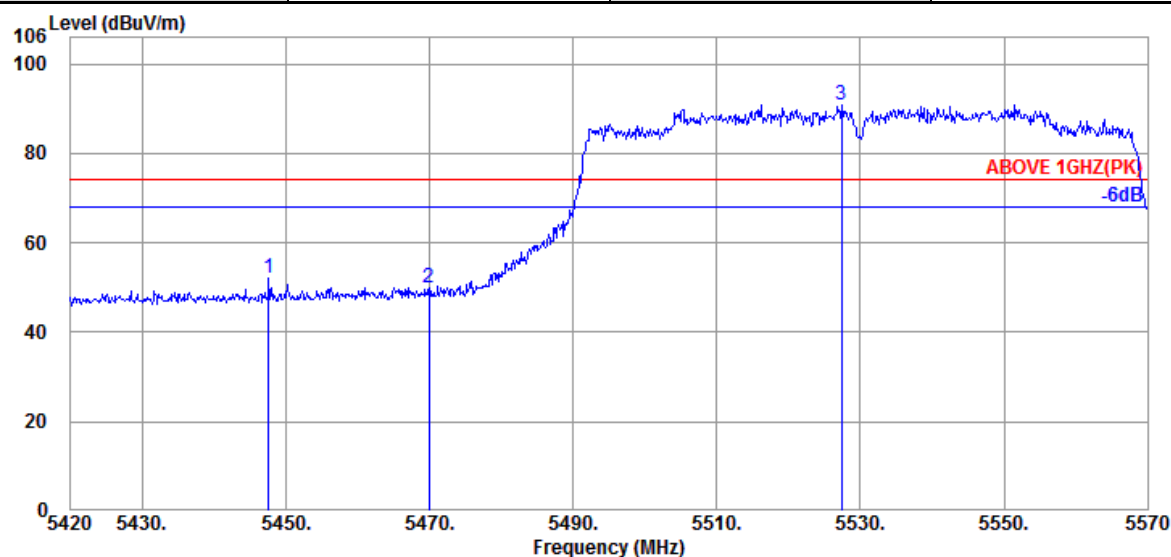

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.600	34.67	10.89	34.29	40.87	52.14	74.00	18.13	Peak
5469.950	34.67	10.91	34.28	38.49	49.79	74.00	20.44	Peak
@ 5527.400	34.60	10.93	34.29	79.70	90.94	---	---	Peak

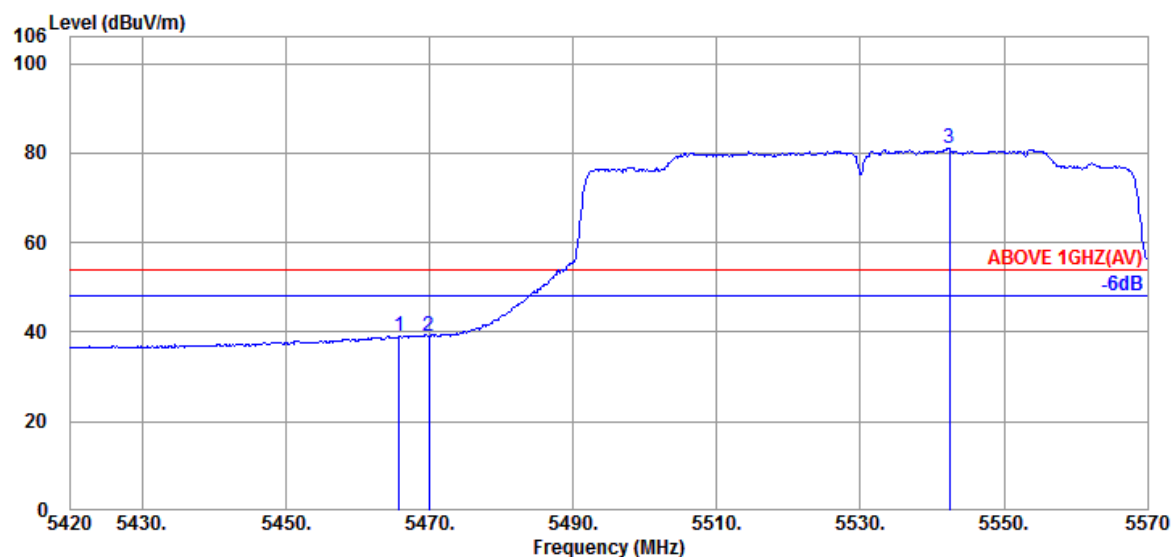

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.750	34.67	10.91	34.28	27.95	39.25	54.00	9.64	Average
5469.950	34.67	10.91	34.28	27.90	39.20	54.00	10.07	Average
@ 5542.400	34.60	10.95	34.30	69.67	80.92	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	Band	NII-2C
		Frequency	TX 5530MHz

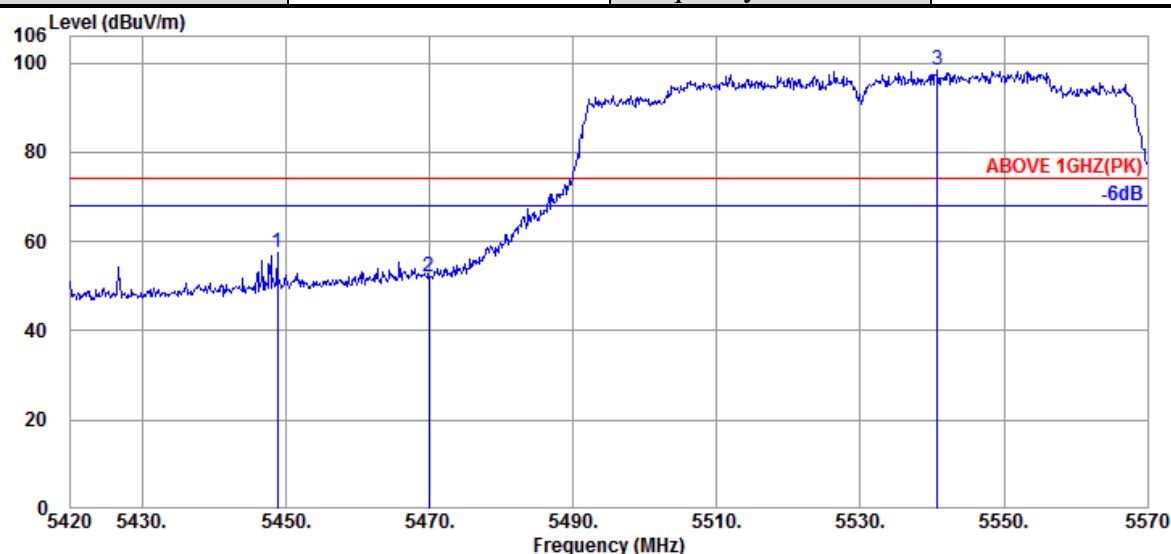

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5448.800	34.70	10.89	34.29	46.31	57.61	74.00	15.44	Peak
5469.950	34.67	10.91	34.28	40.77	52.07	74.00	19.09	Peak
@ 5540.750	34.60	10.95	34.29	87.14	98.40	---	---	Peak

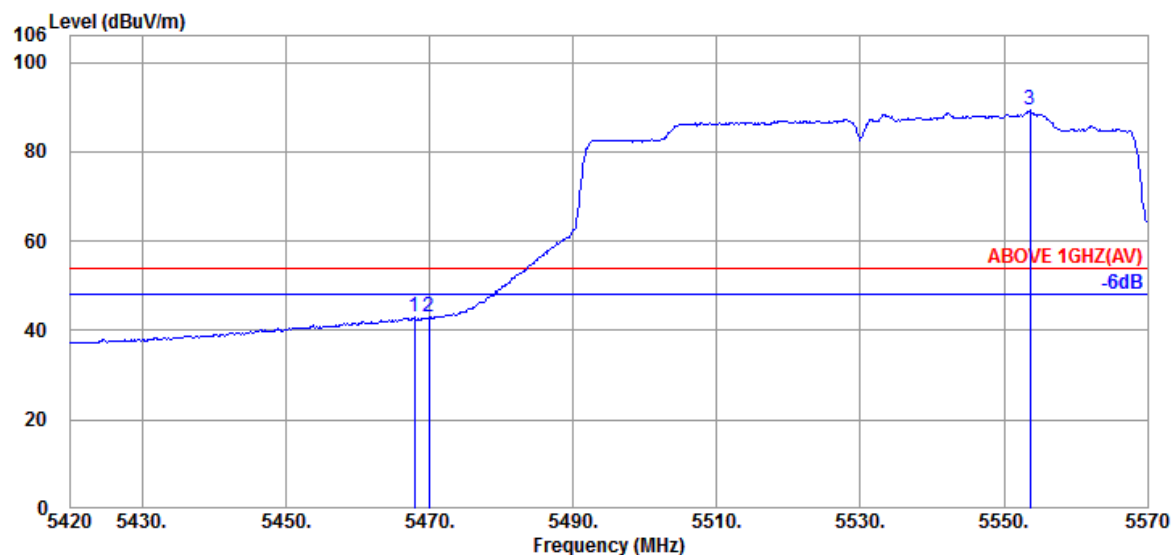

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.850	34.67	10.91	34.28	31.68	42.98	54.00	8.32	Average
5469.950	34.67	10.91	34.28	31.73	43.03	54.00	8.58	Average
@ 5553.650	34.60	10.95	34.30	77.94	89.19	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM2010181

Report Number: EM-F200514

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	Band	NII-2C
		Frequency	TX 5610MHz

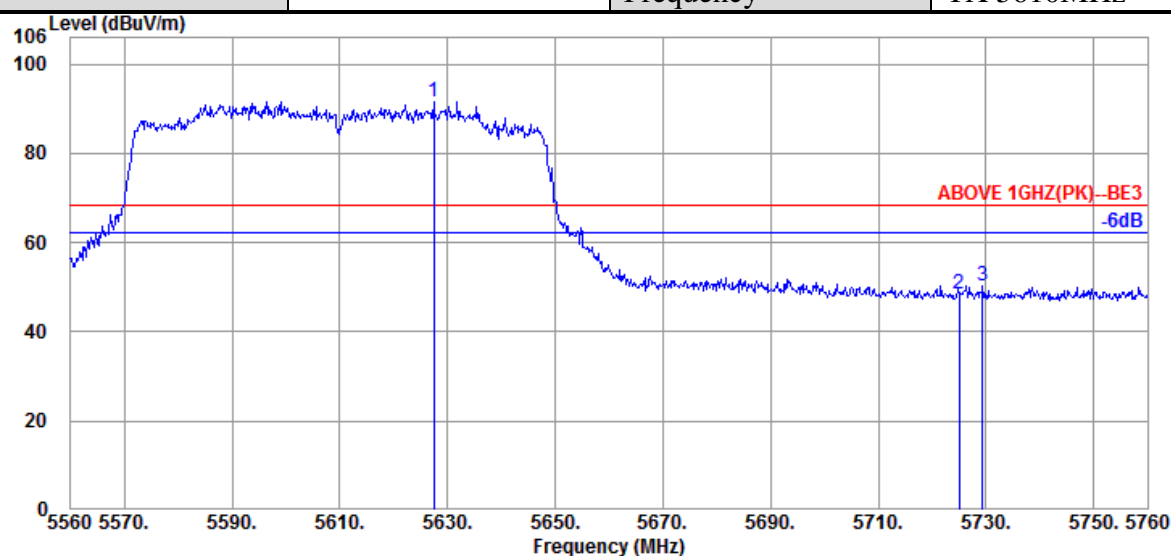

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5627.400	34.60	10.99	34.33	80.23	91.49	---	---	Peak
	5725.000	34.80	11.05	34.37	36.86	48.34	68.20	14.70	Peak
	5729.400	34.80	11.05	34.38	38.93	50.40	68.20	13.01	Peak

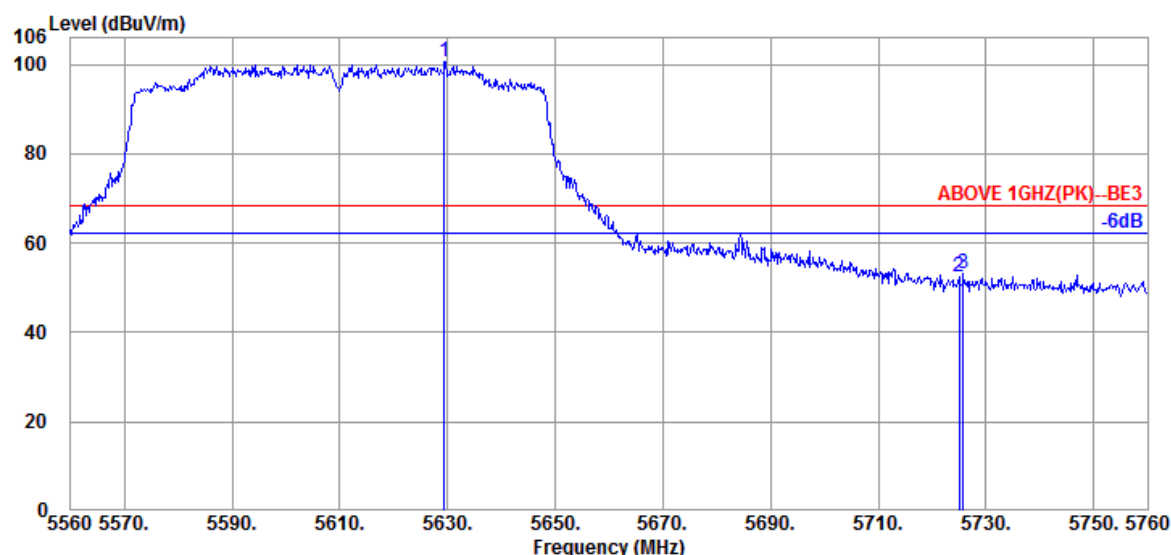

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5629.400	34.60	10.99	34.33	89.48	100.74	---	---	Peak
	5725.000	34.80	11.05	34.37	41.15	52.63	68.20	12.89	Peak
	5725.800	34.80	11.05	34.37	41.87	53.35	68.20	9.66	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM2010181

Report Number: EM-F200514

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	Band	NII-2C
		Frequency	TX 5690MHz

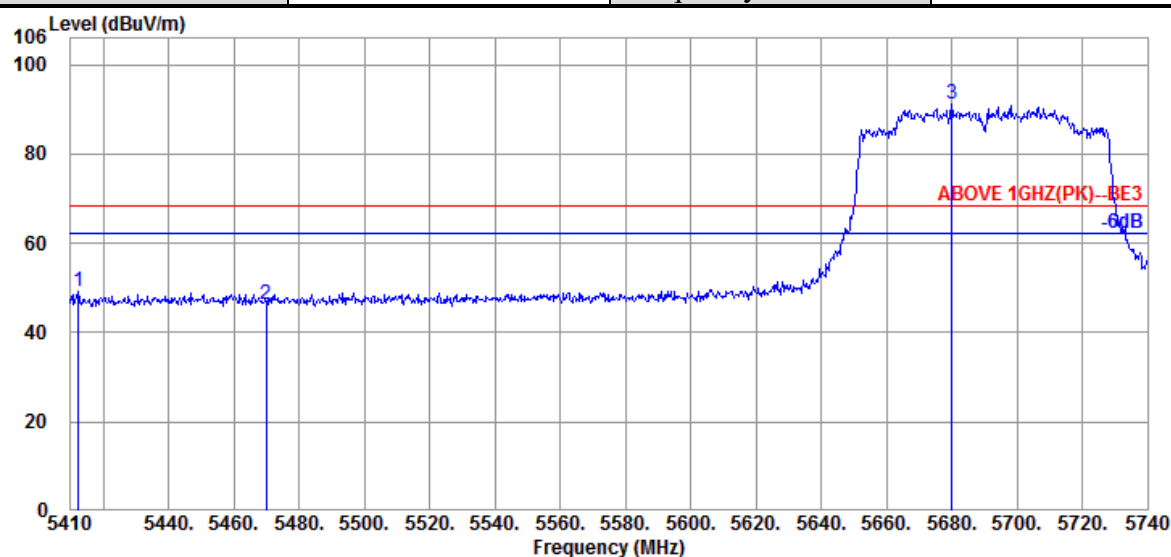

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5412.310	34.62	10.87	34.30	37.92	49.11	68.20	13.00	Peak
5470.060	34.67	10.91	34.28	35.14	46.44	68.20	15.02	Peak
@ 5679.940	34.73	11.03	34.36	79.76	91.16	---	---	Peak

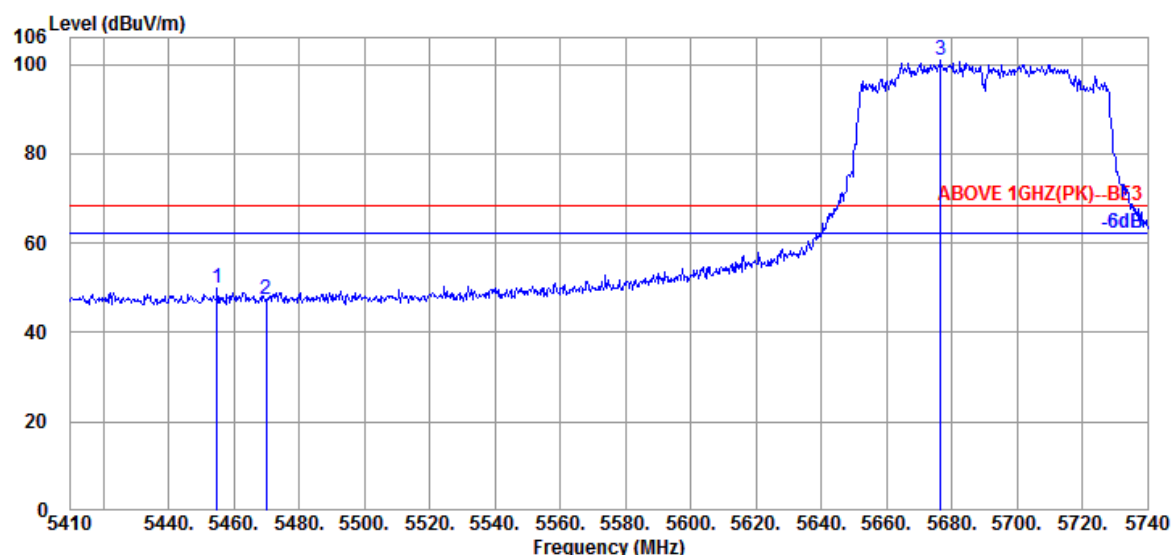

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.880	34.70	10.89	34.28	38.57	49.88	68.20	12.55	Peak
5470.060	34.67	10.91	34.28	36.18	47.48	68.20	14.00	Peak
@ 5676.640	34.73	11.03	34.36	89.67	101.07	---	---	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM2010181


Report Number: EM-F200514

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	Band	NII-2C
		Frequency	TX 5690MHz

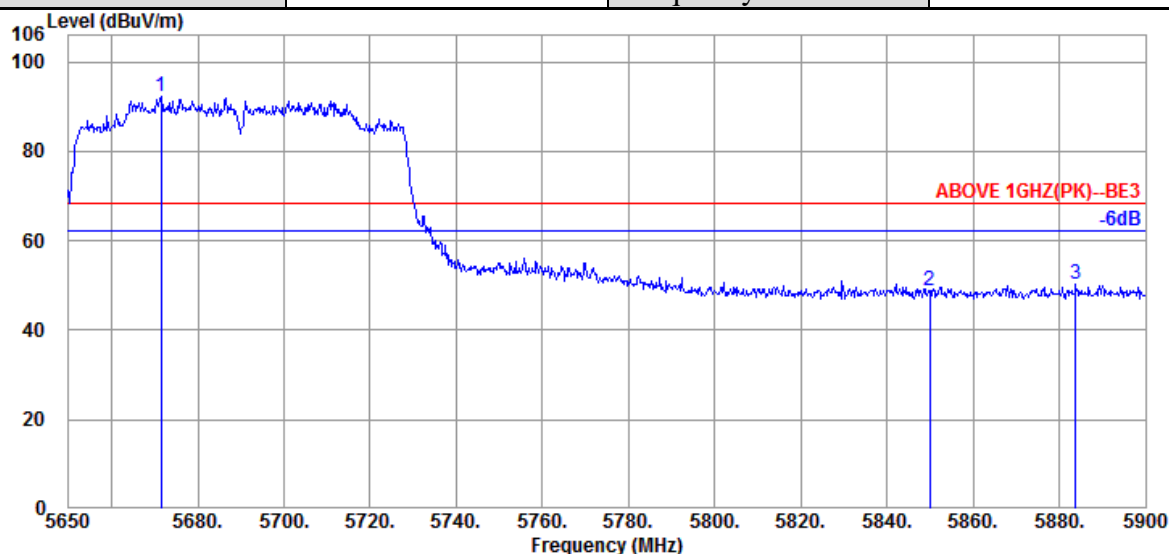

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5671.500	34.67	11.01	34.36	80.91	92.23	---	---	Peak
5850.000	35.40	11.10	34.43	36.62	48.69	68.20	14.21	Peak
5883.750	35.40	11.12	34.45	38.04	50.11	68.20	11.84	Peak

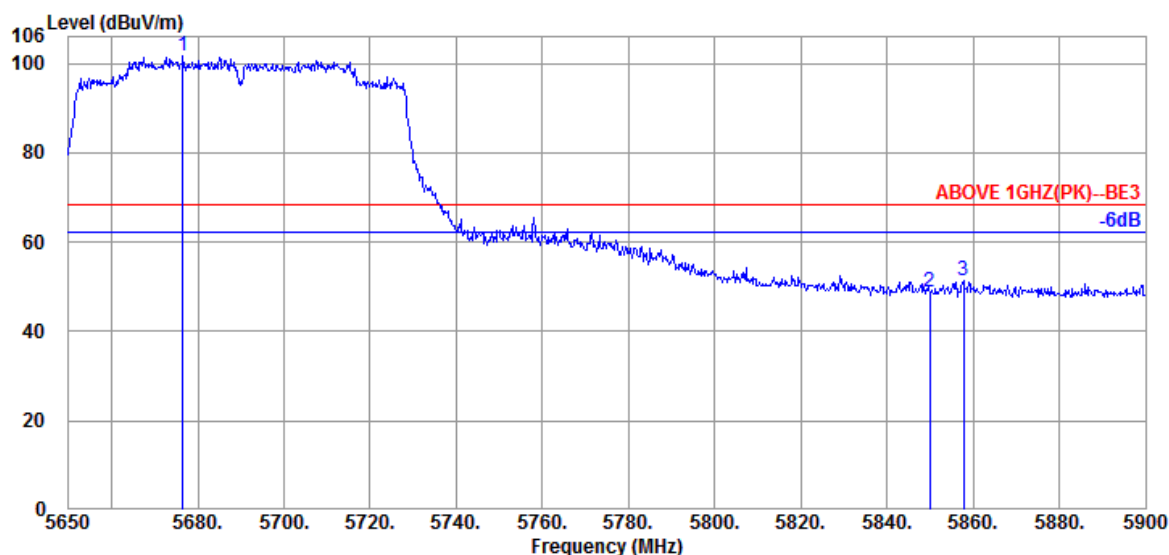

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5676.500	34.73	11.03	34.36	90.11	101.51	---	---	Peak
5850.000	35.40	11.10	34.43	36.73	48.80	68.20	15.67	Peak
5857.750	35.40	11.12	34.43	39.15	51.24	68.20	12.56	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	Band	NII-III
		Frequency	TX 5775MHz


Antenna at Horizontal Polarization

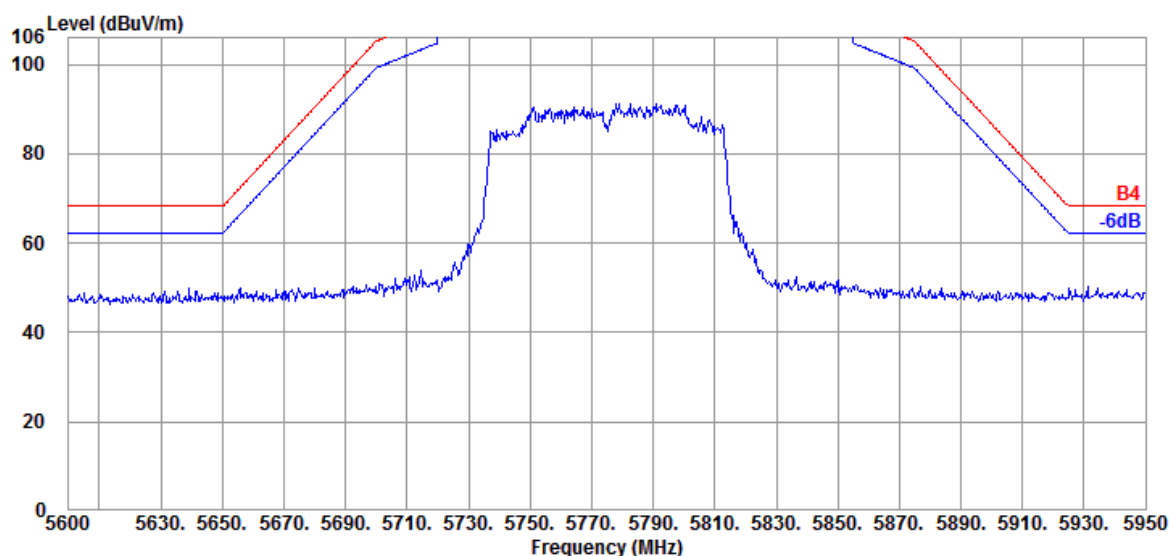

Antenna at Vertical Polarization

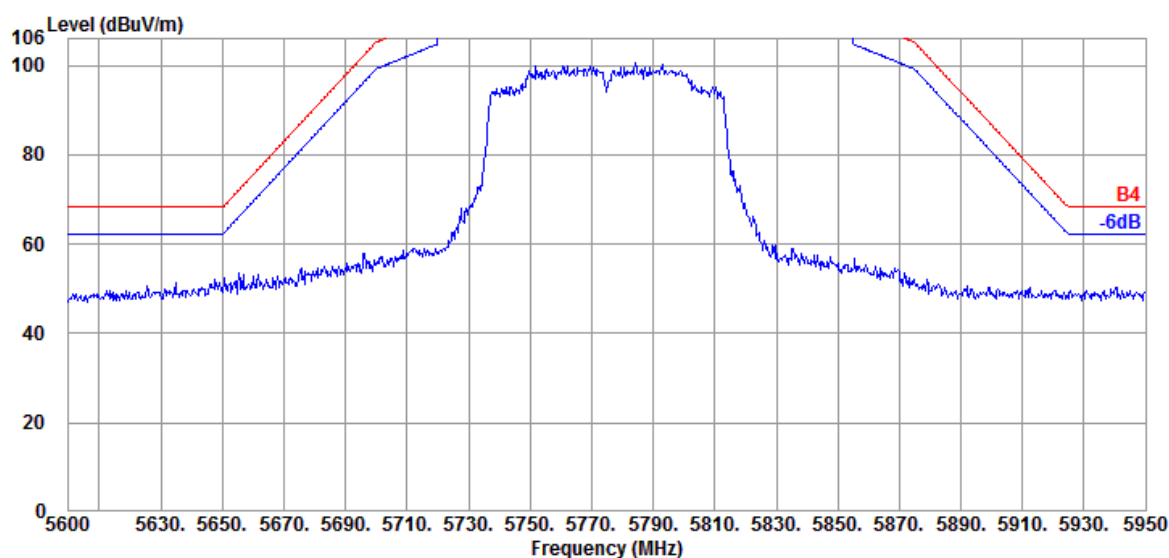


Mode	802.11ac-VH160	Band	NII-I & NII-2A
		Frequency	TX 5250MHz

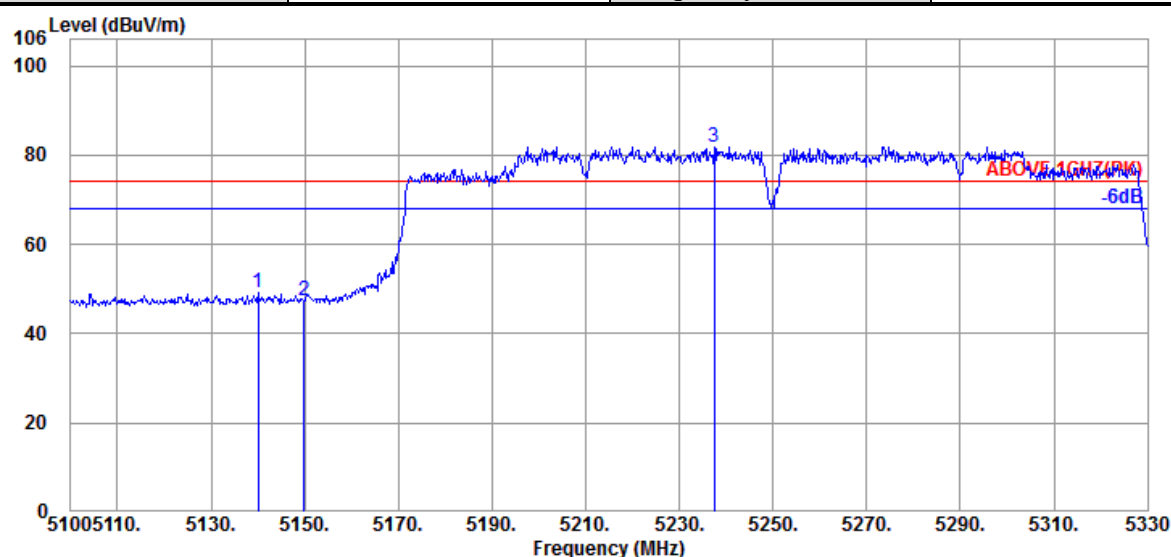

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5140.020	34.37	10.70	34.38	38.52	49.21	74.00	19.46	Peak
5149.910	34.40	10.70	34.38	36.67	47.39	74.00	21.36	Peak
@ 5237.540	34.50	10.76	34.35	71.01	81.92	---	---	Peak

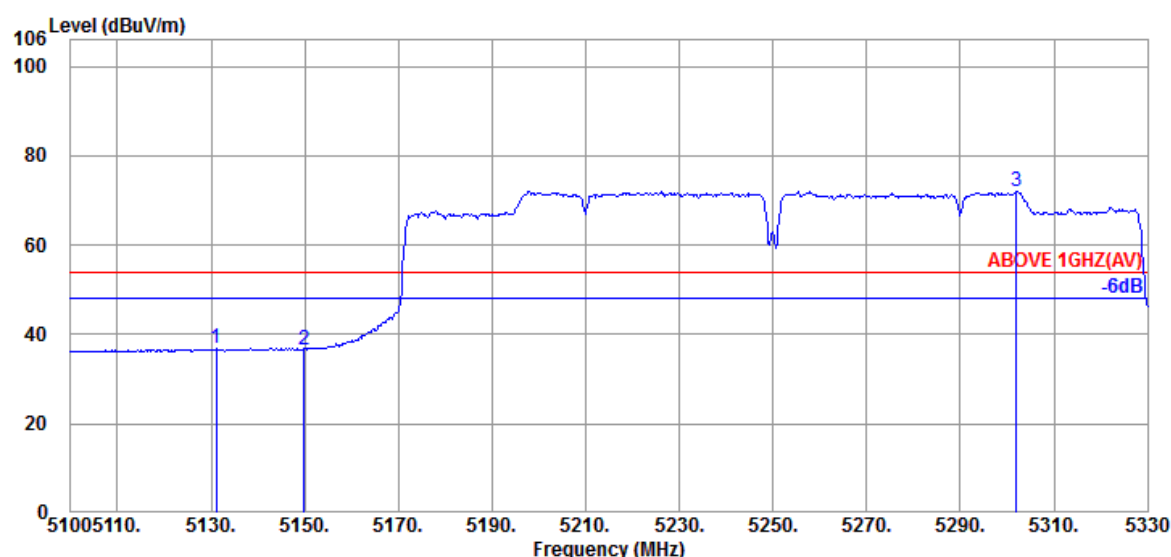

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5131.050	34.37	10.70	34.39	26.24	36.92	54.00	10.30	Average
5149.910	34.40	10.70	34.38	25.99	36.71	54.00	10.62	Average
@ 5301.940	34.60	10.81	34.33	60.95	72.03	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2010181


Report Number: EM-F200514

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VH160	Band	NII-I & NII-2A
		Frequency	TX 5250MHz

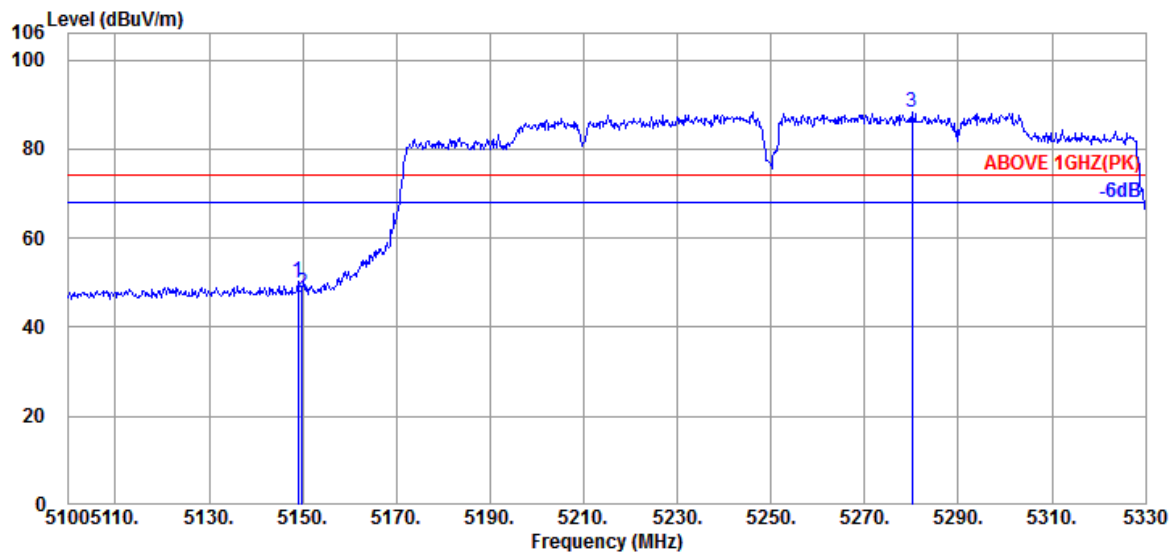

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.990	34.40	10.70	34.38	39.42	50.14	74.00	19.57	Peak
5149.910	34.40	10.70	34.38	37.07	47.79	74.00	21.52	Peak
@ 5280.090	34.57	10.79	34.34	77.20	88.22	---	---	Peak

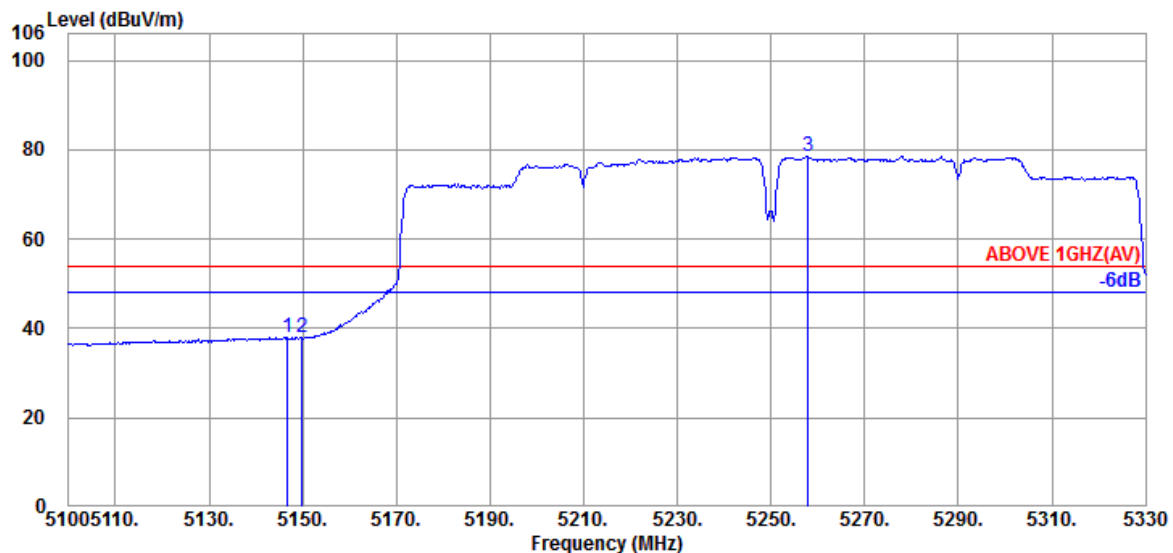

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.690	34.40	10.70	34.38	27.26	37.98	54.00	10.30	Average
5149.910	34.40	10.70	34.38	27.25	37.97	54.00	10.79	Average
@ 5258.010	34.50	10.79	34.35	67.61	78.55	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM2010181

Report Number: EM-F200514


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ac-VH160	Band	NII-I & NII-2A
		Frequency	TX 5250MHz

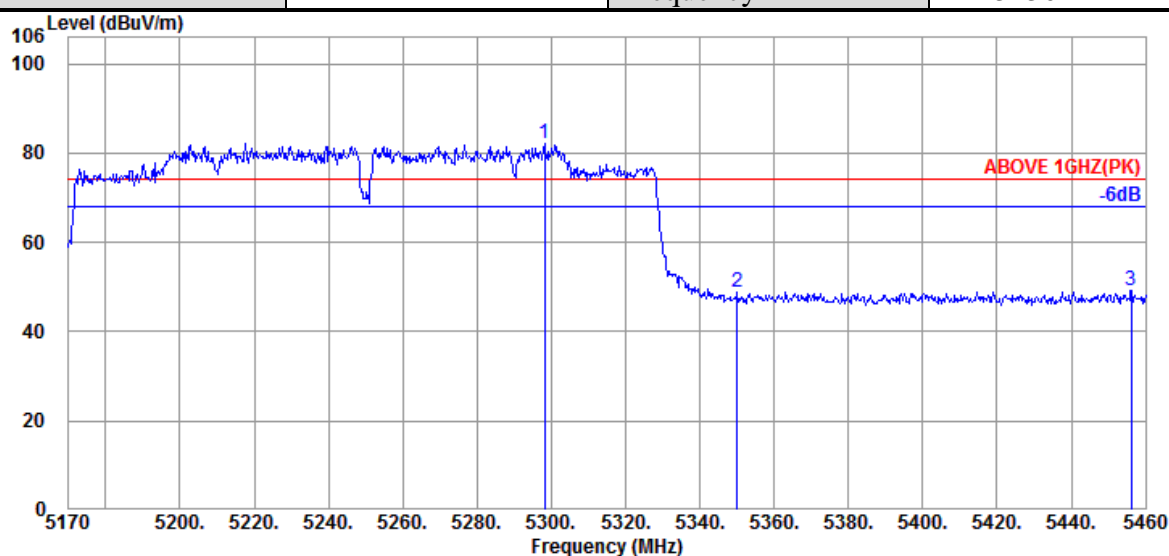

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5298.180	34.60	10.81	34.33	71.10	82.18	---	---	Peak
5350.090	34.60	10.83	34.31	37.62	48.74	74.00	20.78	Peak
5456.230	34.70	10.89	34.28	37.82	49.13	74.00	18.38	Peak

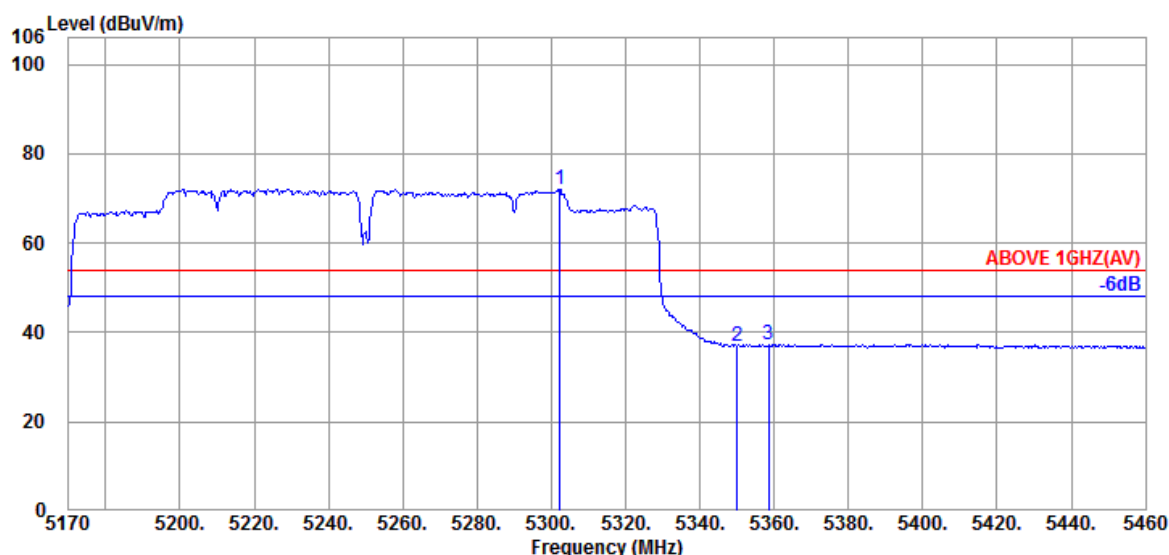


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.240	34.60	10.81	34.33	60.99	72.07	---	---	Average
5350.090	34.60	10.83	34.31	25.95	37.07	54.00	9.98	Average
5358.500	34.60	10.85	34.31	26.21	37.35	54.00	9.40	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	Band	NII-I & NII-2A
		Frequency	TX 5250MHz

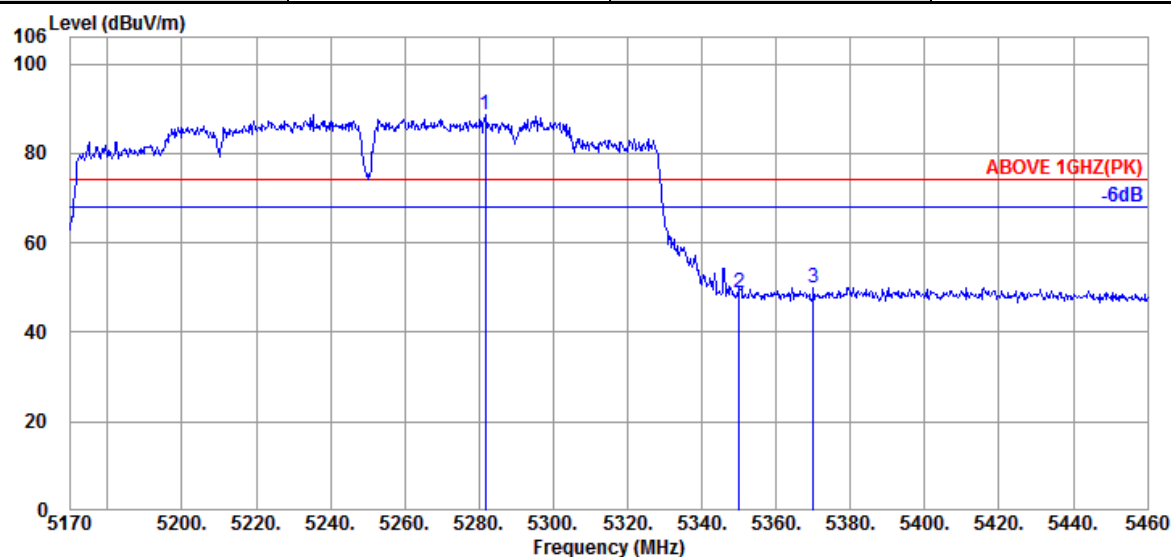

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5281.650	34.57	10.79	34.34	77.69	88.71	---	---	Peak
	5350.090	34.60	10.83	34.31	37.83	48.95	74.00	20.40	Peak
	5370.100	34.60	10.85	34.31	38.90	50.04	74.00	19.00	Peak

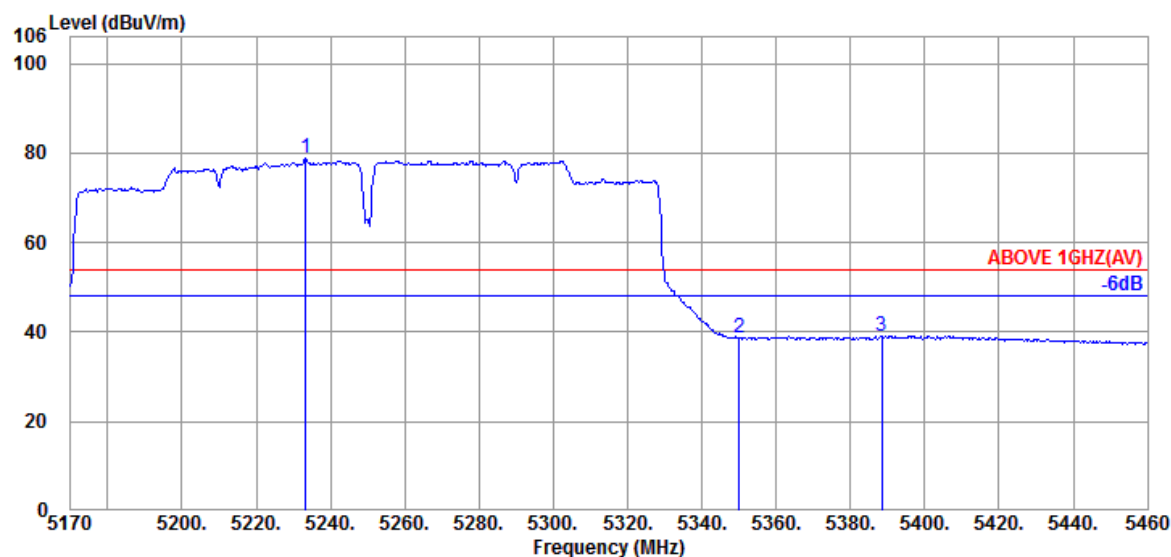

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5233.220	34.50	10.76	34.35	67.78	78.69	---	---	Average
	5350.090	34.60	10.83	34.31	27.58	38.70	54.00	10.10	Average
	5388.370	34.60	10.85	34.30	28.10	39.25	54.00	9.22	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT160	Band	NII-2C
		Frequency	TX 5570MHz

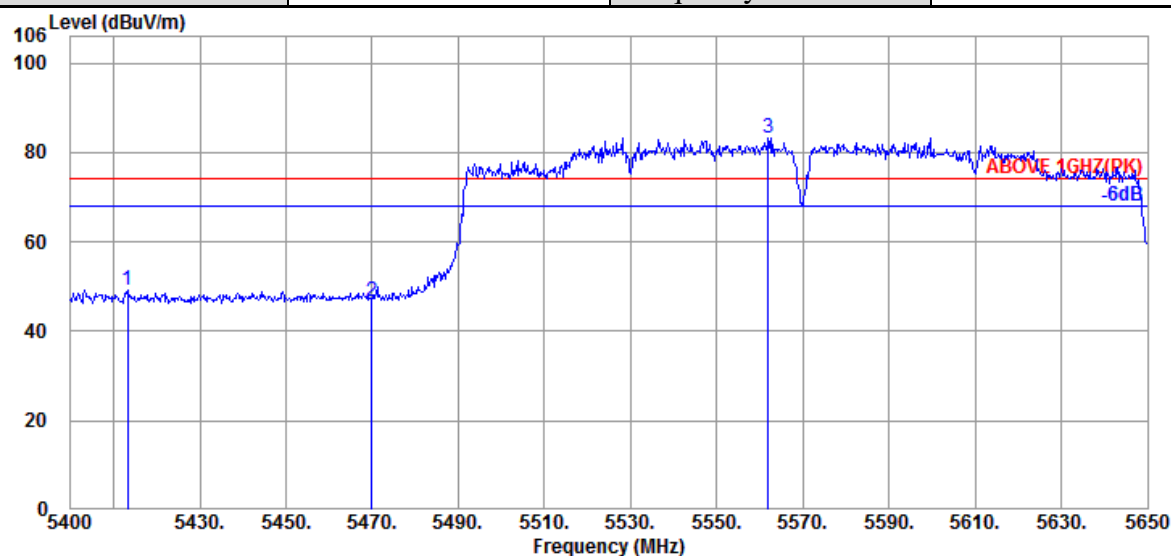

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5413.250	34.62	10.87	34.30	37.91	49.10	74.00	18.44	Peak
5470.000	34.67	10.91	34.28	35.34	46.64	74.00	20.46	Peak
@ 5562.000	34.60	10.95	34.30	72.04	83.29	---	---	Peak

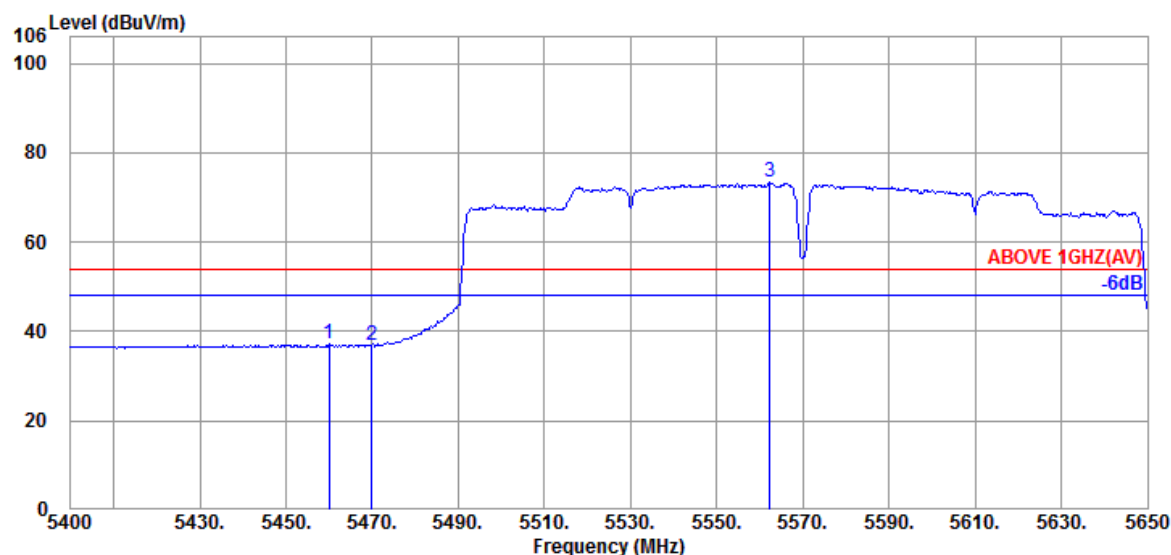

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.000	34.70	10.91	34.28	25.81	37.14	54.00	9.34	Average
5470.000	34.67	10.91	34.28	25.45	36.75	54.00	9.73	Average
@ 5562.250	34.60	10.95	34.30	62.11	73.36	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM2010181

Report Number: EM-F200514


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ac-VHT160	Band	NII-2C
		Frequency	TX 5570MHz

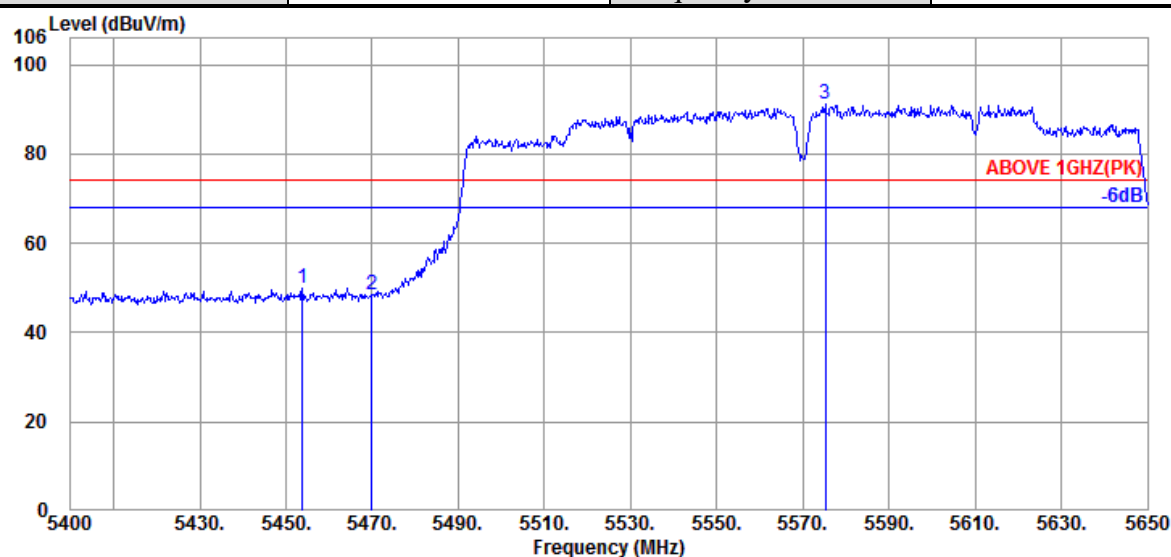

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.750	34.70	10.89	34.28	38.76	50.07	74.00	18.23	Peak
5470.000	34.67	10.91	34.28	37.32	48.62	74.00	20.92	Peak
@ 5575.250	34.60	10.97	34.30	79.93	91.20	---	---	Peak

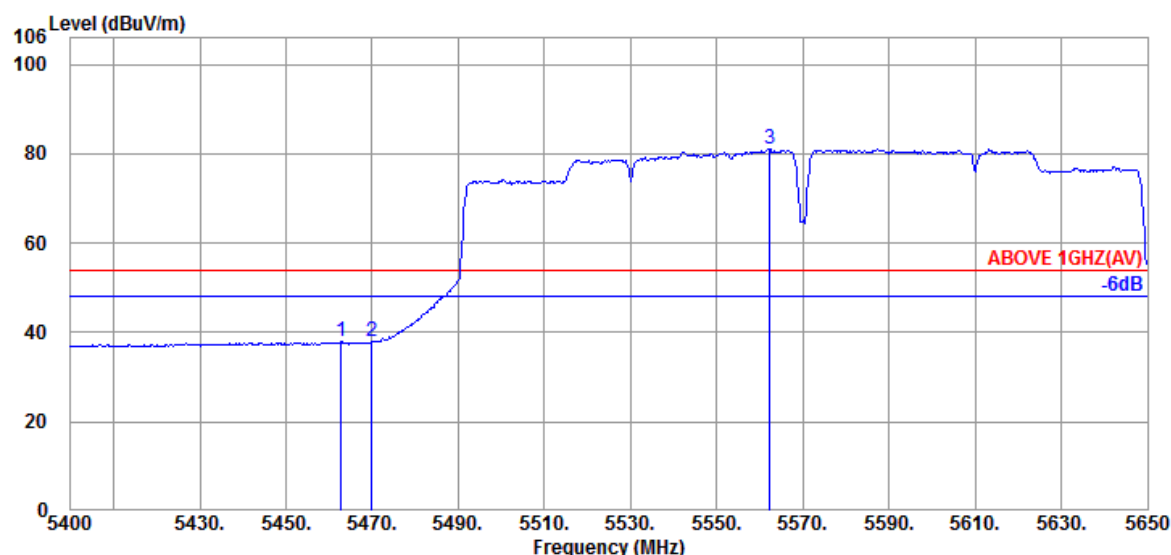

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.750	34.70	10.91	34.28	26.55	37.88	54.00	9.20	Average
5470.000	34.67	10.91	34.28	26.71	38.01	54.00	9.79	Average
@ 5562.250	34.60	10.95	34.30	69.89	81.14	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VH160	Band	NII-2C
		Frequency	TX 5570MHz

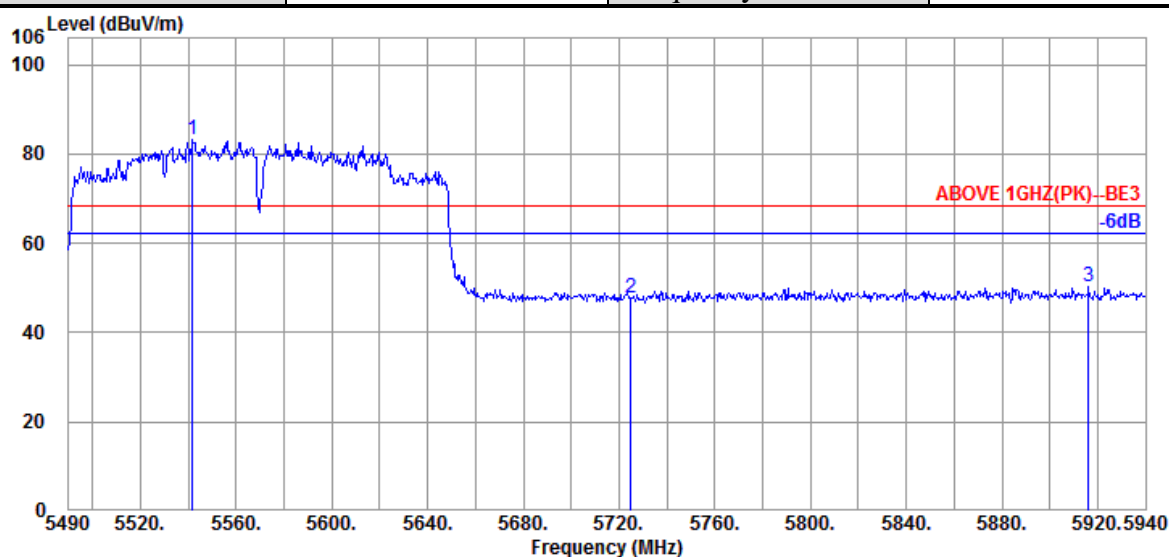

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5541.750	34.60	10.95	34.30	71.98	83.23	---	---	Peak
	5724.900	34.80	11.05	34.37	36.30	47.78	68.20	14.40	Peak
	5916.150	35.47	11.14	34.46	38.07	50.22	68.20	12.58	Peak

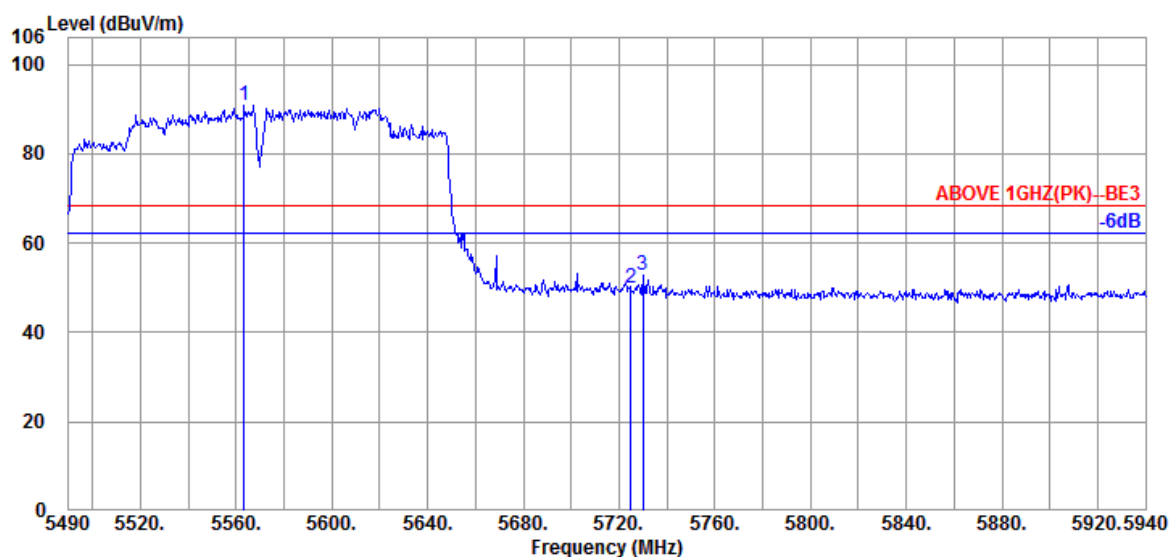


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5563.350	34.60	10.95	34.30	79.42	90.67	---	---	Peak
	5724.900	34.80	11.05	34.37	38.38	49.86	68.20	14.72	Peak
	5729.850	34.80	11.05	34.38	41.44	52.91	68.20	12.40	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-I
		Frequency	TX 5180MHz

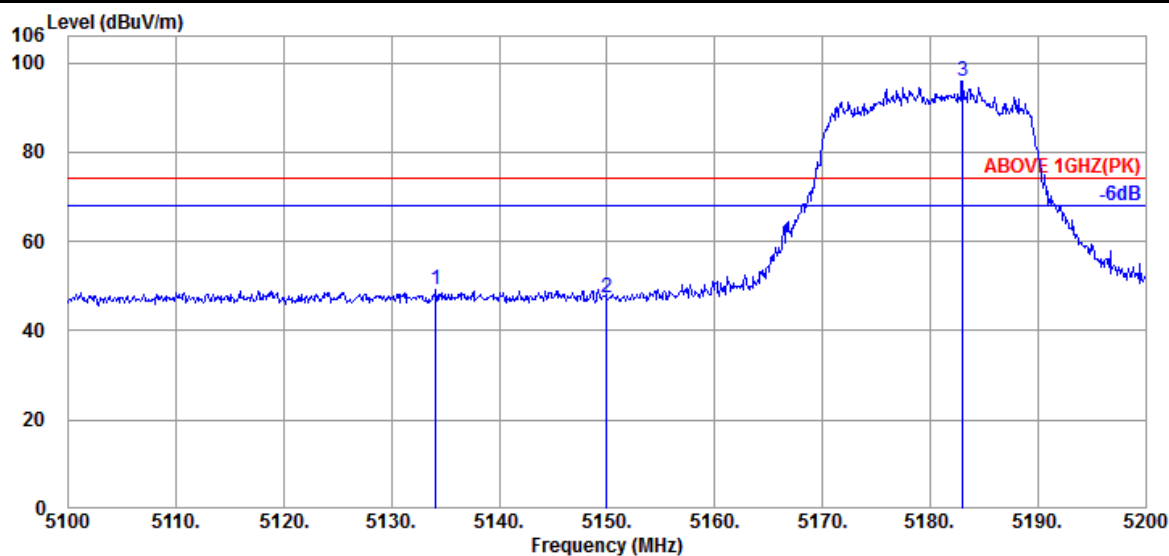

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5134.100	34.37	10.70	34.39	38.40	49.08	74.00	19.56	Peak
5150.000	34.40	10.70	34.38	36.82	47.54	74.00	21.99	Peak
@ 5183.000	34.47	10.72	34.37	84.92	95.74	---	---	Peak

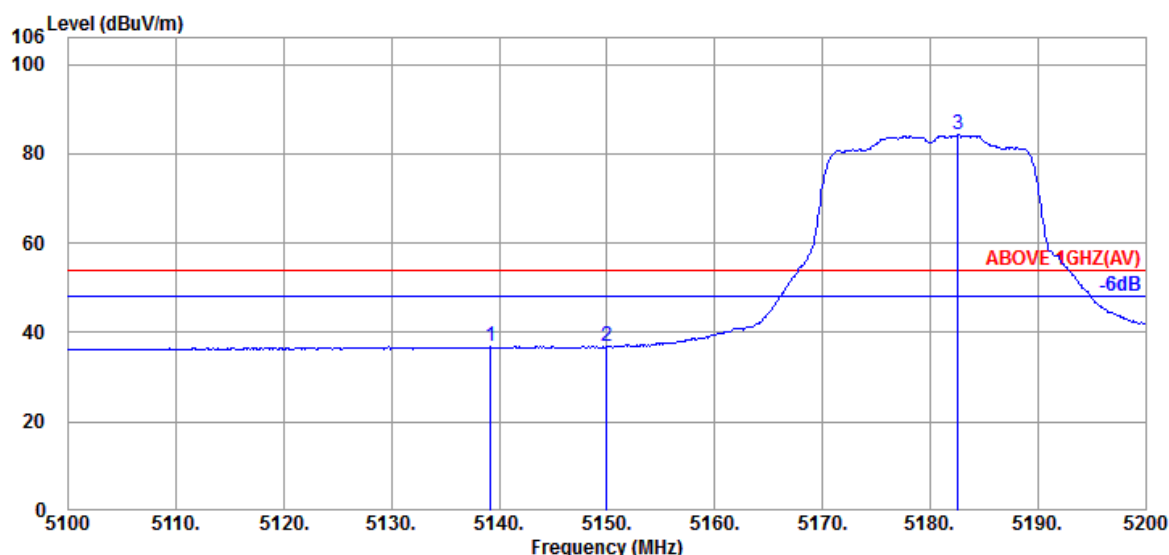


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5139.200	34.37	10.70	34.39	26.34	37.02	54.00	11.21	Average
5150.000	34.40	10.70	34.38	26.02	36.74	54.00	11.29	Average
@ 5182.600	34.47	10.72	34.37	73.39	84.21	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-I
		Frequency	TX 5180MHz

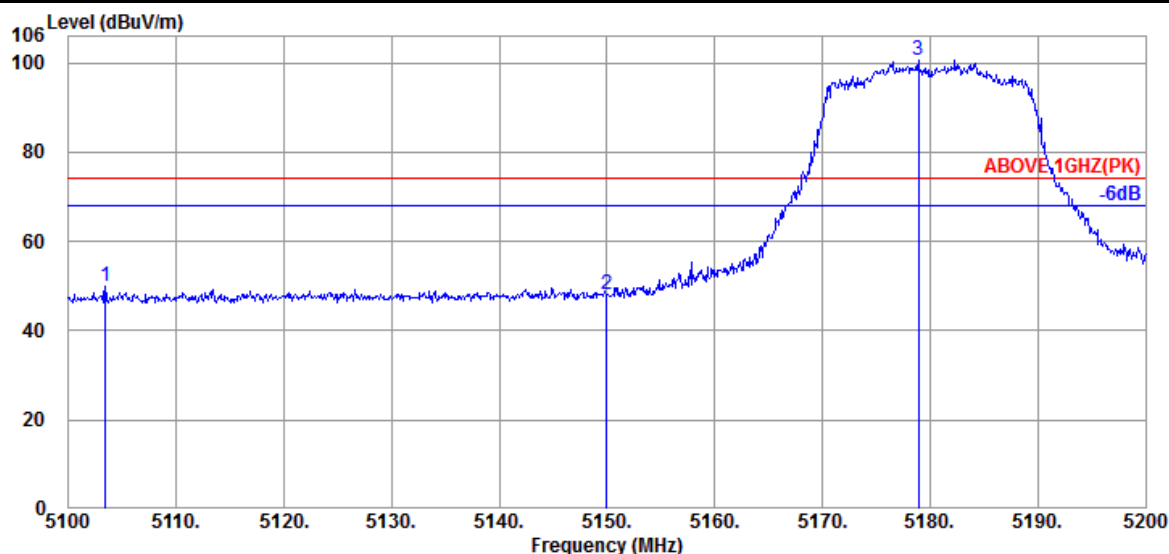

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5103.400	34.30	10.68	34.40	39.42	50.00	74.00	16.85	Peak
5150.000	34.40	10.70	34.38	37.22	47.94	74.00	21.27	Peak
@ 5178.900	34.47	10.72	34.37	89.89	100.71	---	---	Peak

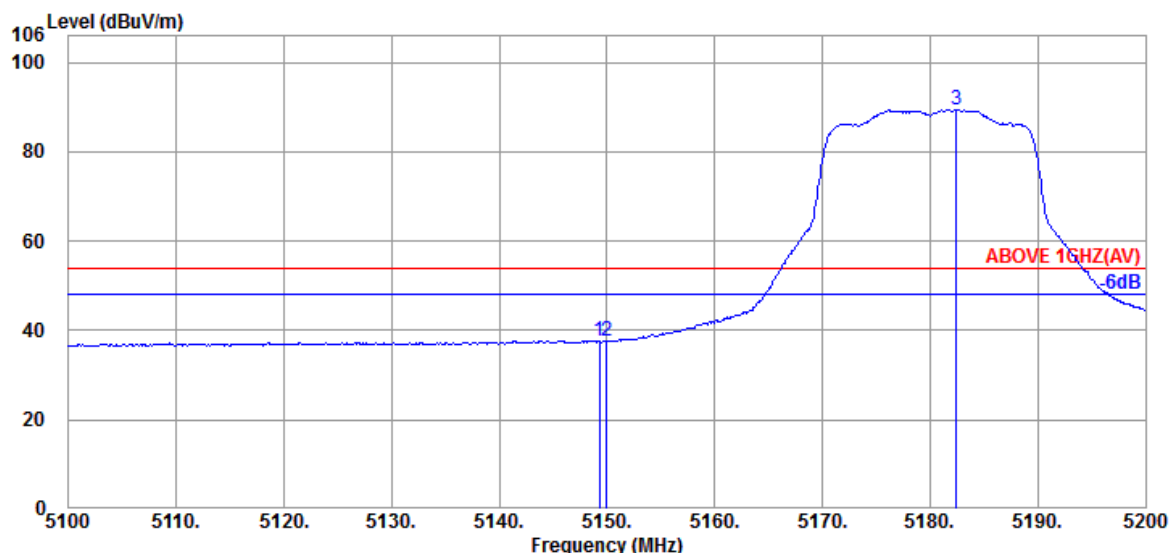


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.300	34.40	10.70	34.38	26.95	37.67	54.00	10.57	Average
5150.000	34.40	10.70	34.38	26.87	37.59	54.00	10.86	Average
@ 5182.400	34.47	10.72	34.37	78.58	89.40	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2A
		Frequency	TX 5320MHz

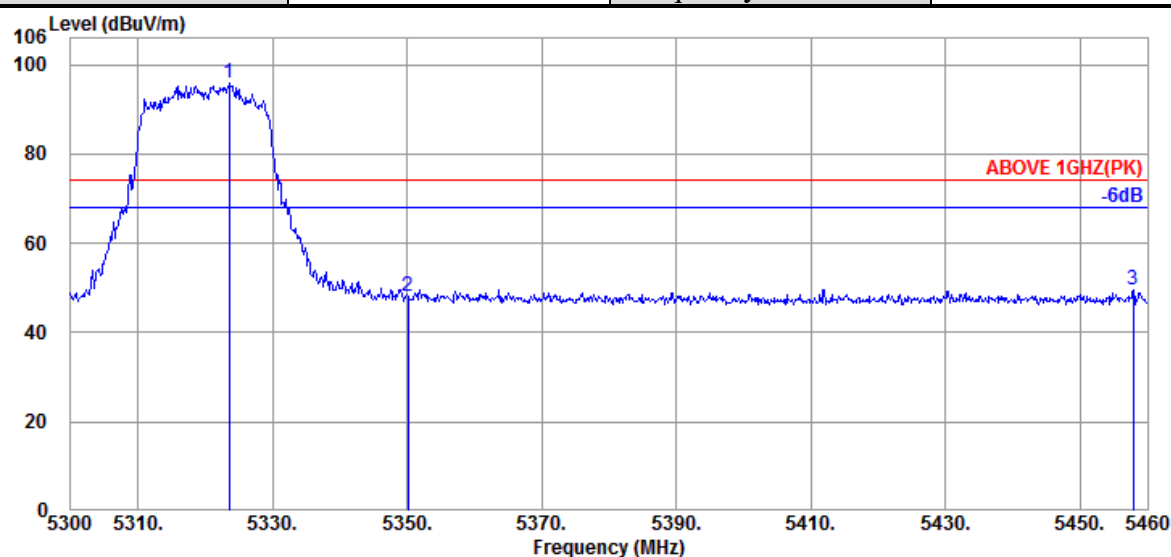

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5323.520	34.60	10.83	34.33	84.72	95.82	---	---	Peak
	5350.080	34.60	10.83	34.31	37.17	48.29	74.00	19.80	Peak
	5457.920	34.70	10.89	34.28	38.43	49.74	74.00	18.30	Peak

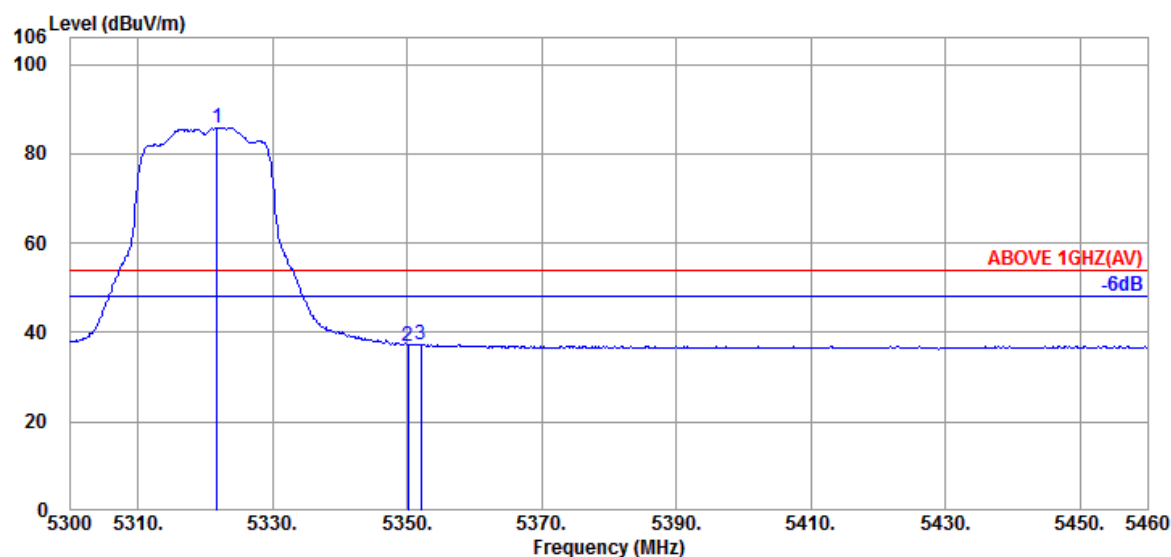


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5321.760	34.60	10.83	34.33	74.76	85.86	---	---	Average
	5350.080	34.60	10.83	34.31	25.95	37.07	54.00	10.93	Average
	5352.000	34.60	10.83	34.31	26.31	37.43	54.00	10.26	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2A
		Frequency	TX 5320MHz

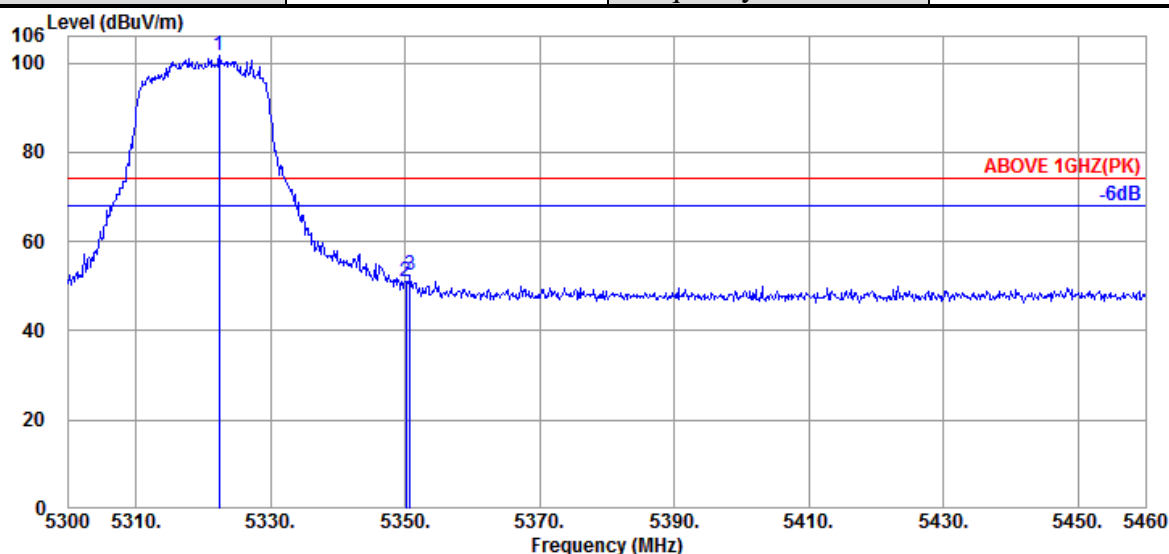

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5322.400	34.60	10.83	34.33	90.53	101.63	---	---	Peak
	5350.080	34.60	10.83	34.31	39.79	50.91	74.00	19.49	Peak
	5350.720	34.60	10.83	34.31	41.18	52.30	74.00	17.78	Peak

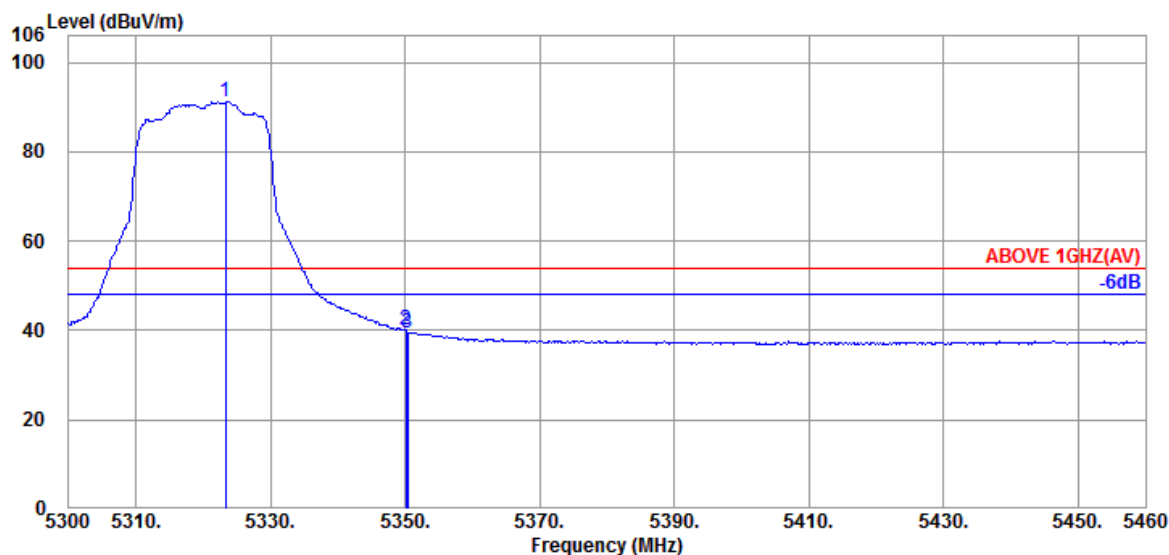

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5323.360	34.60	10.83	34.33	80.03	91.13	---	---	Average
	5350.080	34.60	10.83	34.31	29.08	40.20	54.00	9.28	Average
	5350.400	34.60	10.83	34.31	28.42	39.54	54.00	8.99	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Band	NII-2C
		Frequency	TX 5500MHz

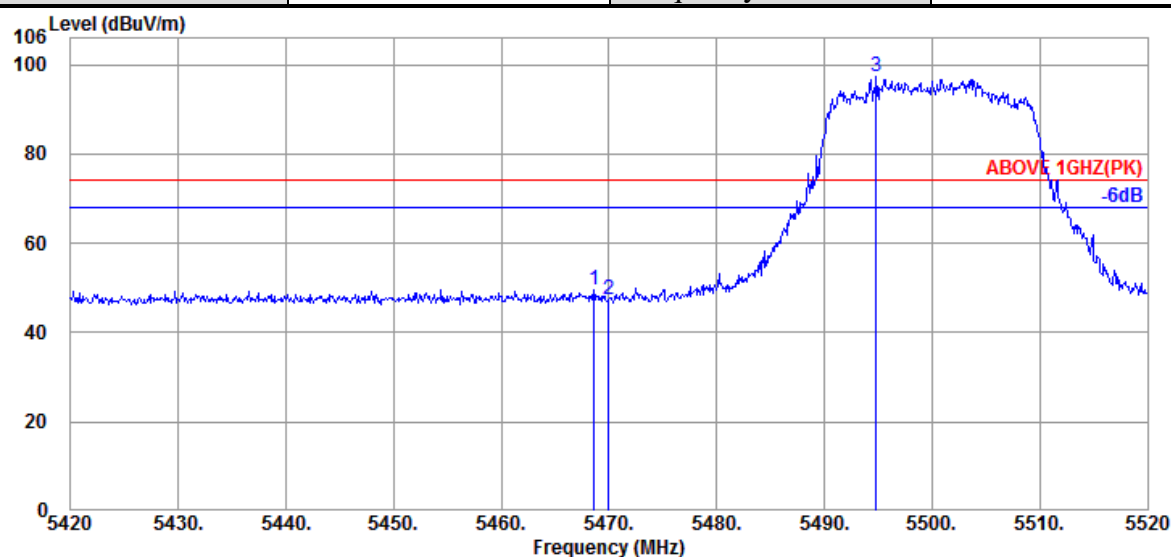

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.600	34.67	10.91	34.28	38.26	49.56	74.00	18.45	Peak
5470.000	34.67	10.91	34.28	35.92	47.22	74.00	20.31	Peak
@ 5494.800	34.63	10.93	34.27	85.91	97.20	---	---	Peak

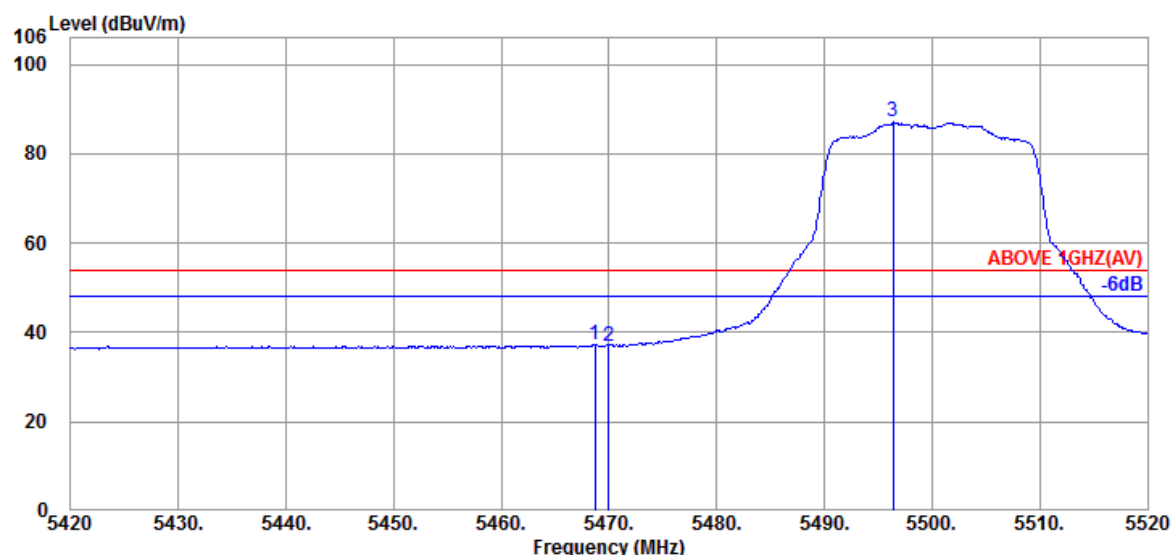

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.67	10.91	34.28	26.11	37.41	54.00	10.25	Average
5470.000	34.67	10.91	34.28	25.64	36.94	54.00	10.46	Average
@ 5496.400	34.60	10.93	34.27	75.76	87.02	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Band	NII-2C
		Frequency	TX 5500MHz

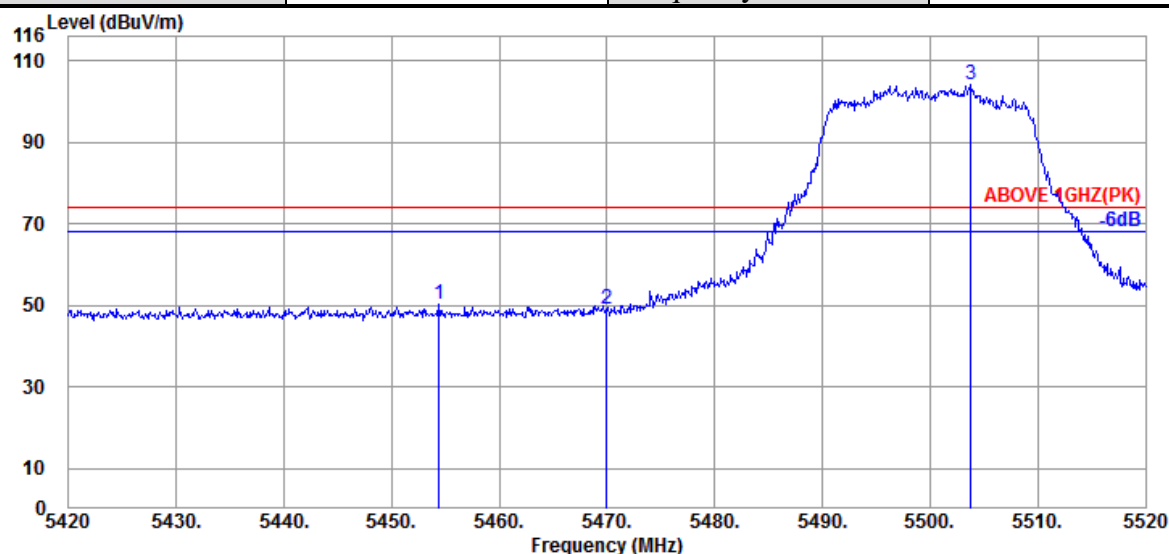

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.400	34.70	10.89	34.28	39.03	50.34	74.00	17.35	Peak
5470.000	34.67	10.91	34.28	37.92	49.22	74.00	20.49	Peak
@ 5503.800	34.60	10.93	34.27	92.82	104.08	---	---	Peak

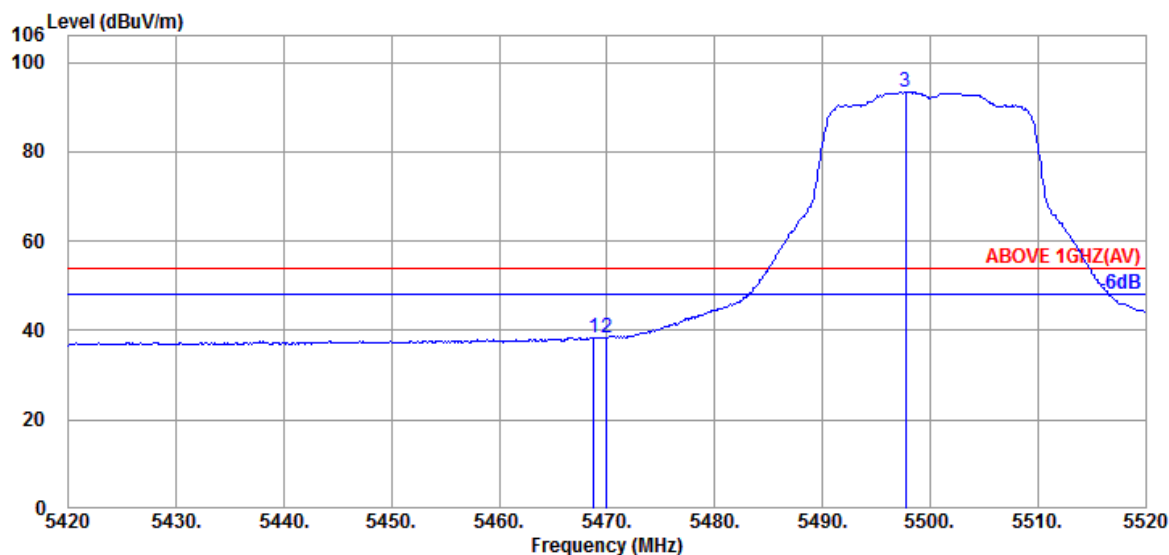

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.67	10.91	34.28	27.08	38.38	54.00	9.62	Average
5470.000	34.67	10.91	34.28	27.13	38.43	54.00	9.76	Average
@ 5497.700	34.60	10.93	34.27	82.24	93.50	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM2010181

Report Number: EM-F200514


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ax-HE20	Band	NII-2C
		Frequency	TX 5700MHz

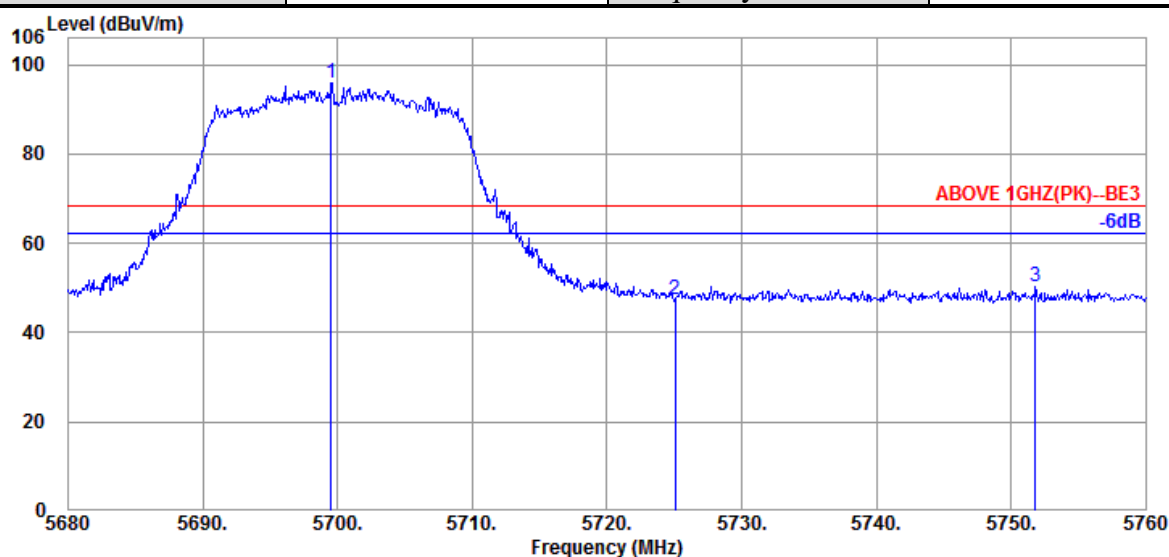

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5699.520	34.80	11.03	34.36	84.36	95.83	---	---	Peak
	5725.040	34.80	11.05	34.37	35.91	47.39	68.20	14.33	Peak
	5751.840	34.80	11.06	34.39	38.74	50.21	68.20	12.52	Peak

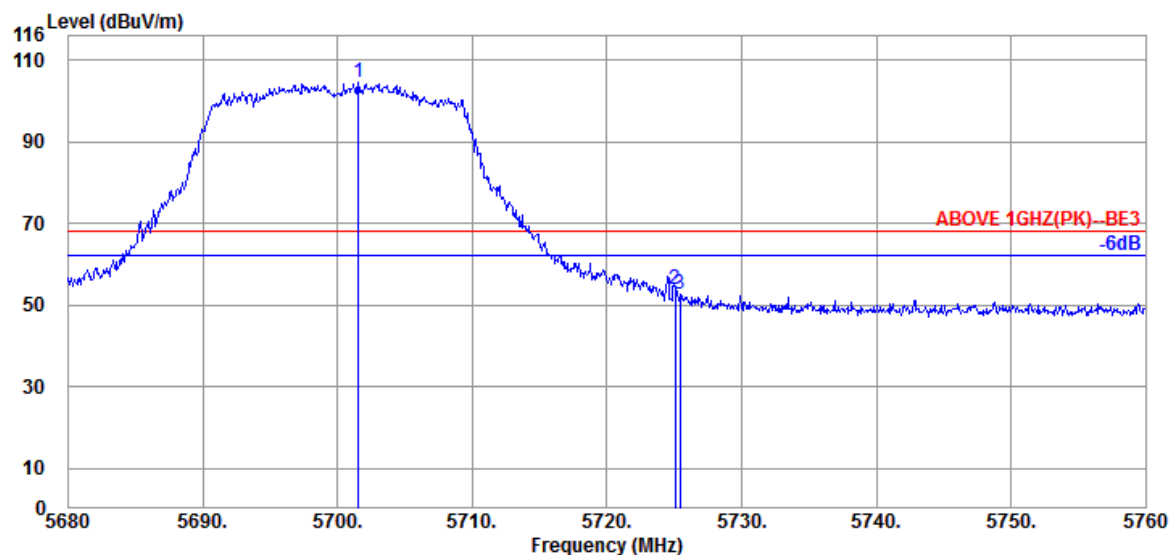

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5701.520	34.80	11.03	34.36	92.99	104.46	---	---	Peak
	5725.040	34.80	11.05	34.37	42.45	53.93	68.20	14.44	Peak
	5725.440	34.80	11.05	34.37	41.12	52.60	68.20	12.48	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Band	NII-2C
		Frequency	TX 5720MHz

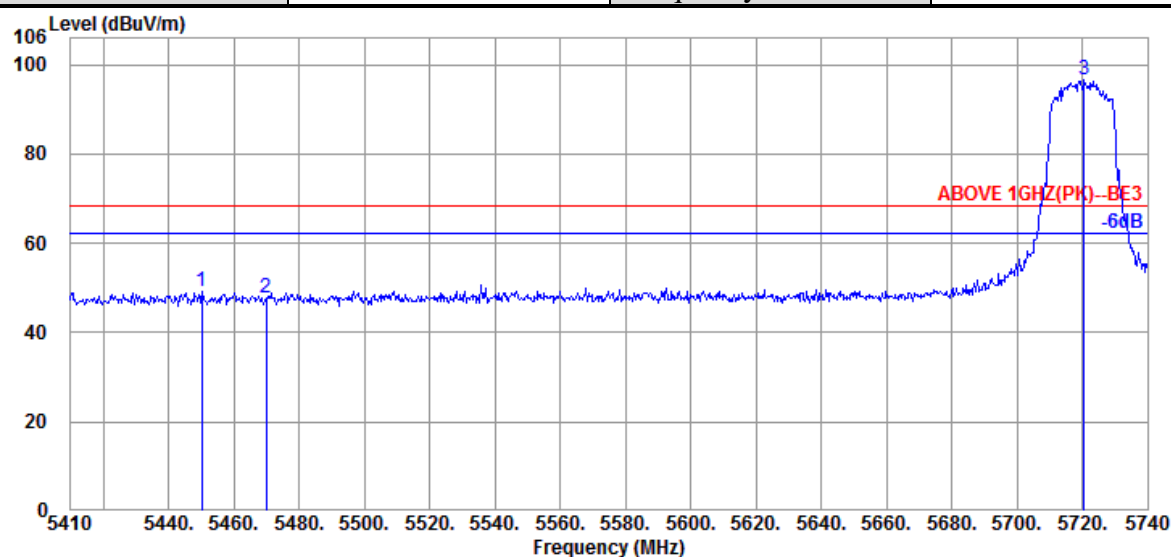

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.260	34.70	10.89	34.29	37.85	49.15	68.20	12.99	Peak
5470.060	34.67	10.91	34.28	36.55	47.85	68.20	15.72	Peak
@ 5720.530	34.80	11.05	34.37	84.96	96.44	---	---	Peak

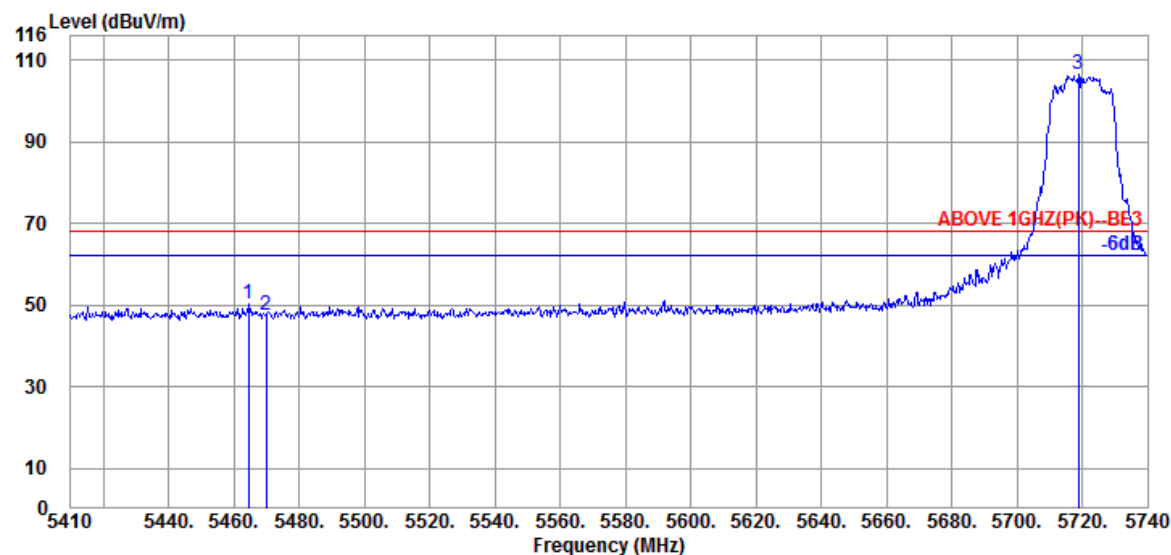


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.450	34.67	10.91	34.28	38.84	50.14	68.20	12.88	Peak
5470.060	34.67	10.91	34.28	36.01	47.31	68.20	15.35	Peak
@ 5718.880	34.80	11.05	34.37	94.97	106.45	---	---	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2C
		Frequency	TX 5720MHz

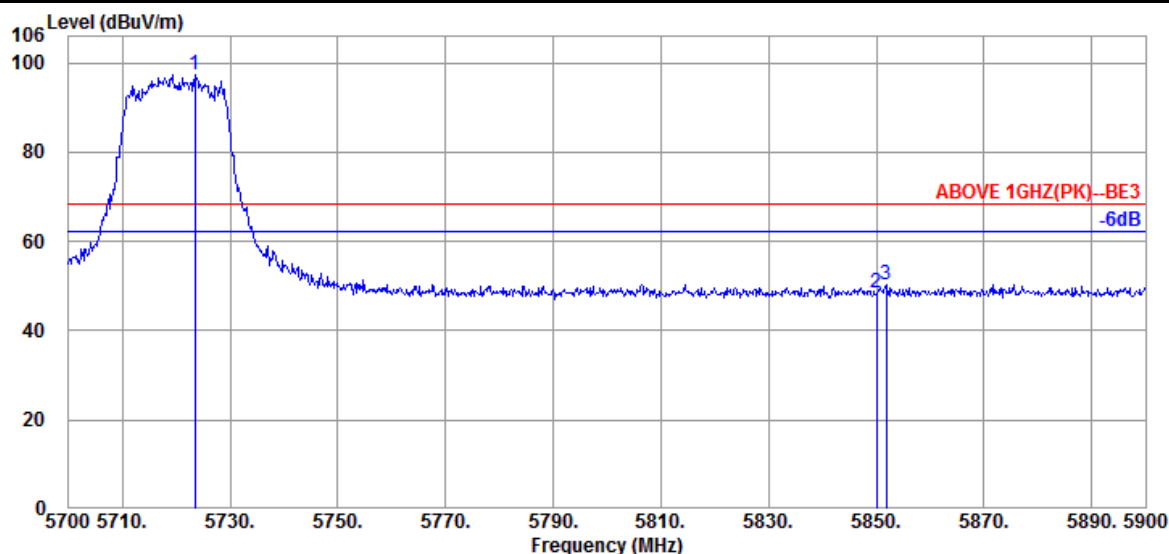

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5723.400	34.80	11.05	34.37	85.99	97.47	---	---	Peak
5850.000	35.40	11.10	34.43	36.46	48.53	68.20	14.90	Peak
5851.800	35.40	11.10	34.43	38.35	50.42	68.20	12.53	Peak

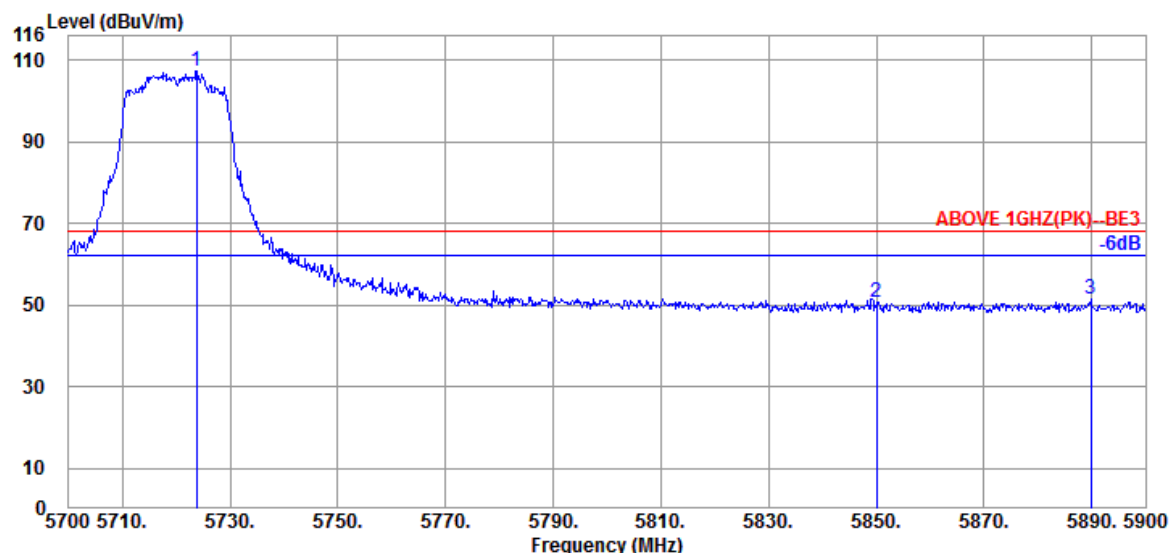

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5723.800	34.80	11.05	34.37	95.95	107.43	---	---	Peak
5850.000	35.40	11.10	34.43	38.60	50.67	68.20	15.15	Peak
5889.800	35.40	11.12	34.45	39.26	51.33	68.20	12.03	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-HE20	Band	NII-III
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

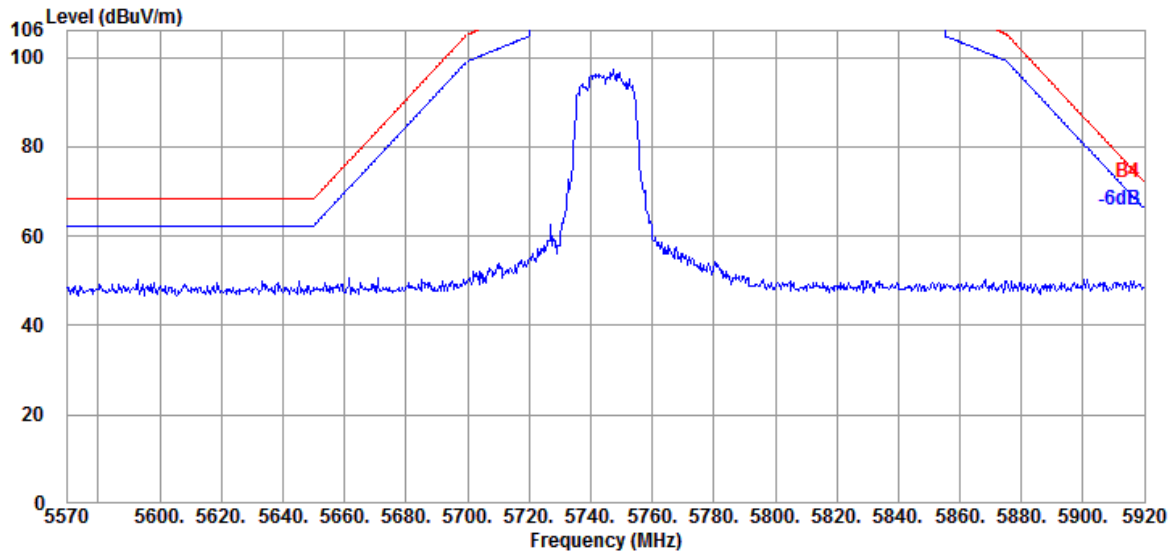

Antenna at Vertical Polarization

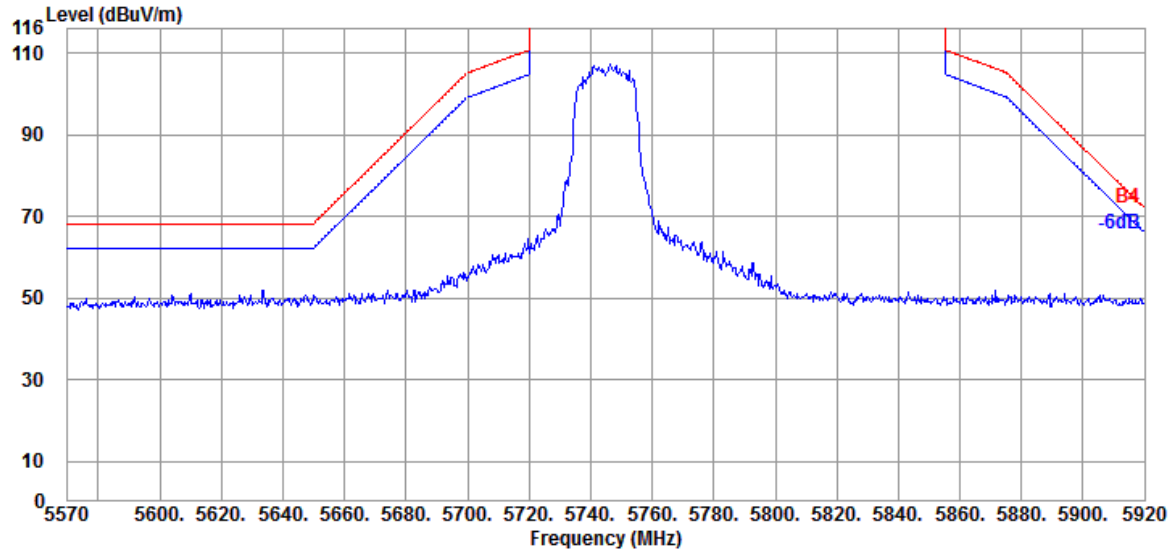


Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-HE20	Band	NII-III
		Frequency	TX 5825MHz

Antenna at Horizontal Polarization

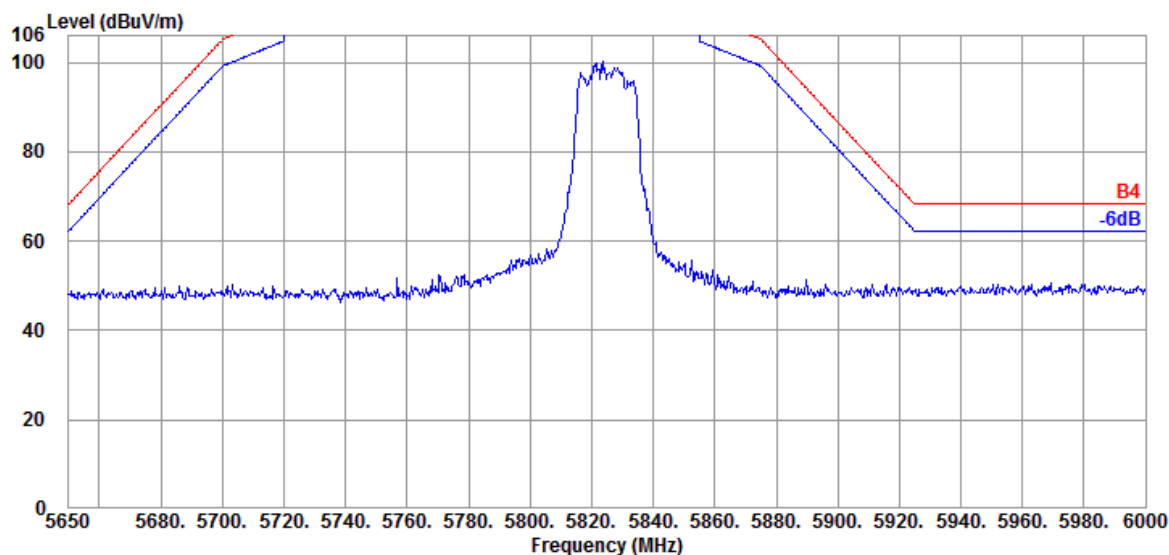

Antenna at Vertical Polarization

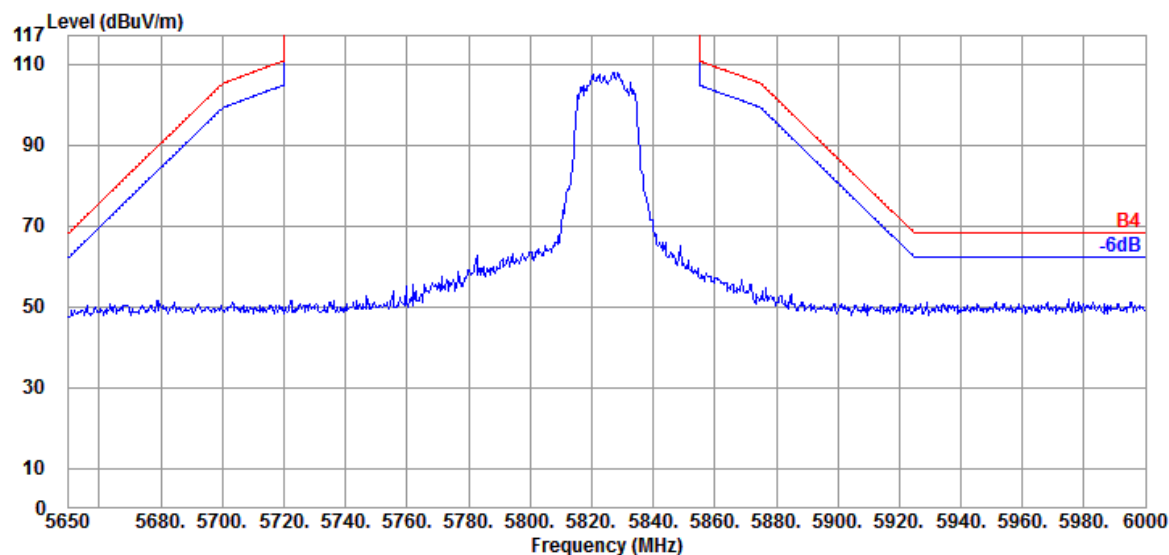

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Band	NII-I
		Frequency	TX 5190MHz

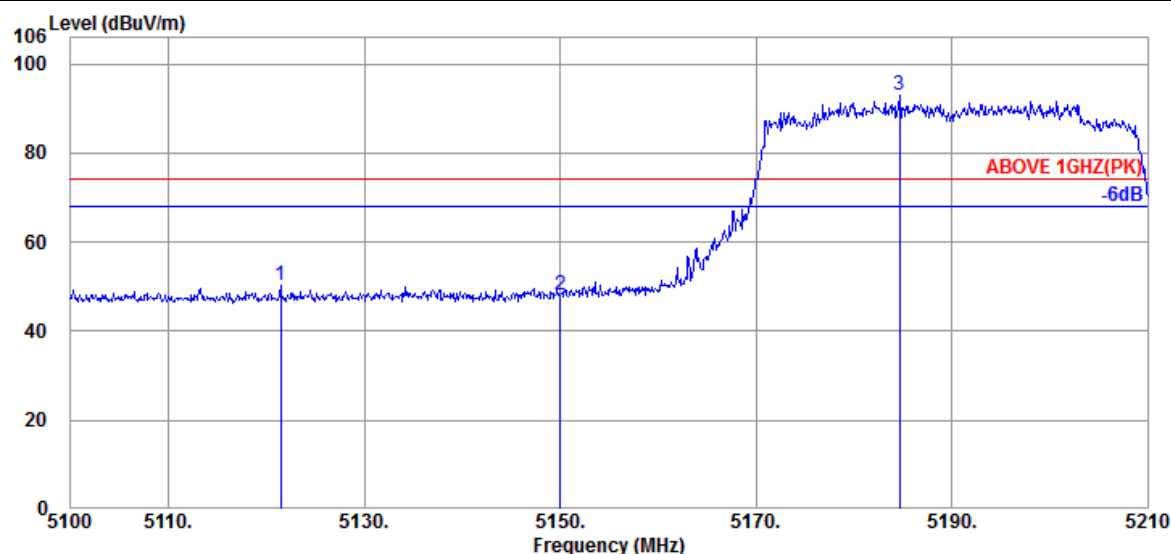

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5121.450	34.33	10.70	34.39	39.61	50.25	74.00	19.13	Peak
5150.050	34.40	10.70	34.38	37.41	48.13	74.00	22.16	Peak
@ 5184.700	34.47	10.72	34.37	82.25	93.07	---	---	Peak

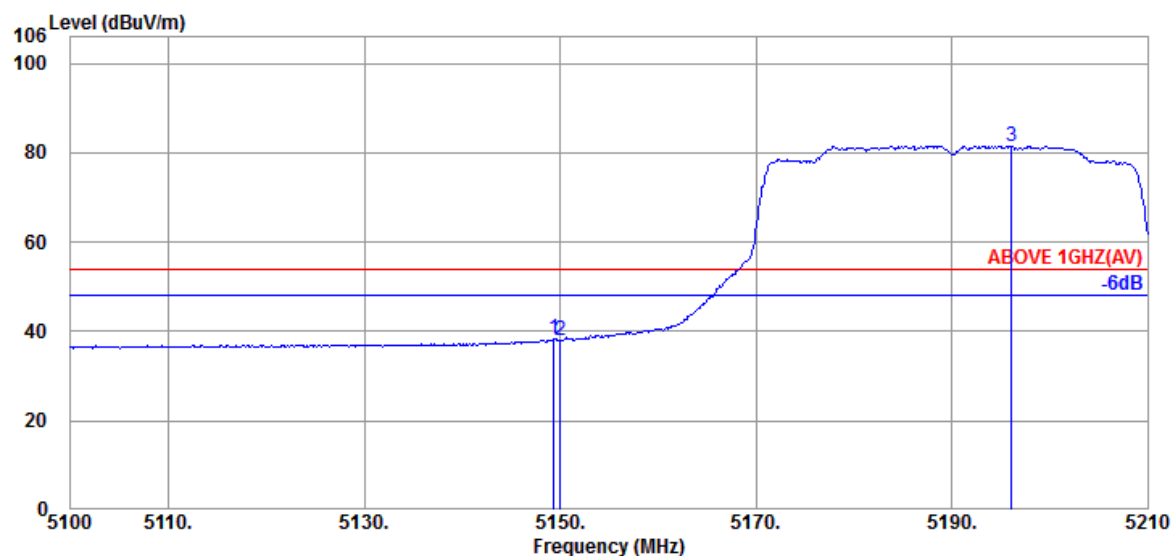

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.390	34.40	10.70	34.38	27.64	38.36	54.00	11.22	Average
5150.050	34.40	10.70	34.38	27.41	38.13	54.00	11.12	Average
@ 5196.140	34.50	10.74	34.36	70.60	81.48	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM2010181

Report Number: EM-F200514

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Band	NII-I
		Frequency	TX 5190MHz

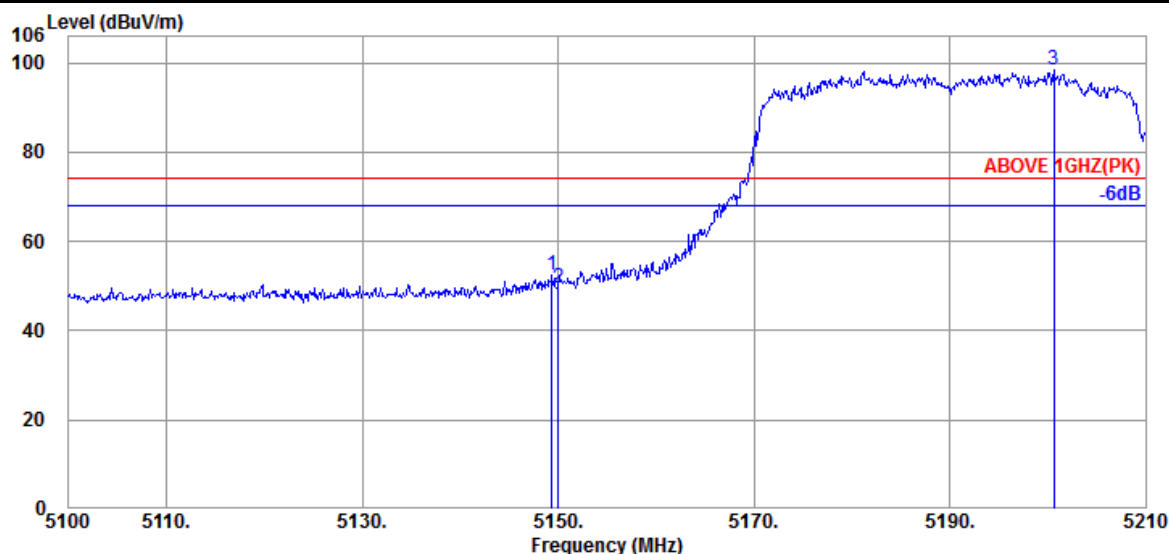

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.390	34.40	10.70	34.38	41.87	52.59	74.00	18.89	Peak
5150.050	34.40	10.70	34.38	38.94	49.66	74.00	20.18	Peak
@ 5200.650	34.50	10.74	34.36	87.47	98.35	---	---	Peak

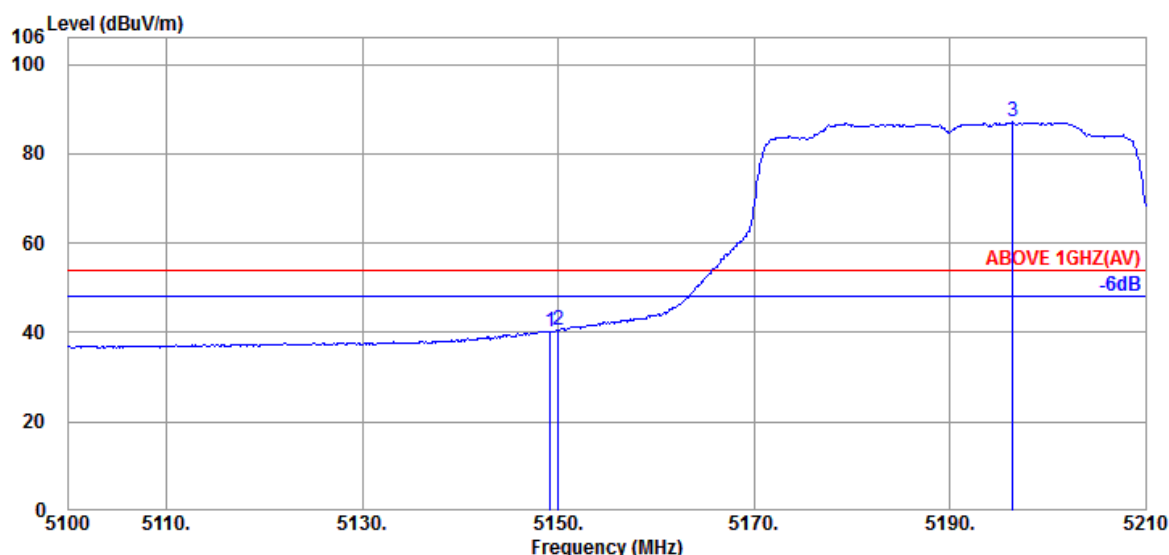

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.170	34.40	10.70	34.38	29.61	40.33	54.00	9.99	Average
5150.050	34.40	10.70	34.38	29.85	40.57	54.00	10.02	Average
@ 5196.470	34.50	10.74	34.36	76.13	87.01	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM2010181

Report Number: EM-F200514


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ax-HE40	Band	NII-2A
		Frequency	TX 5310MHz

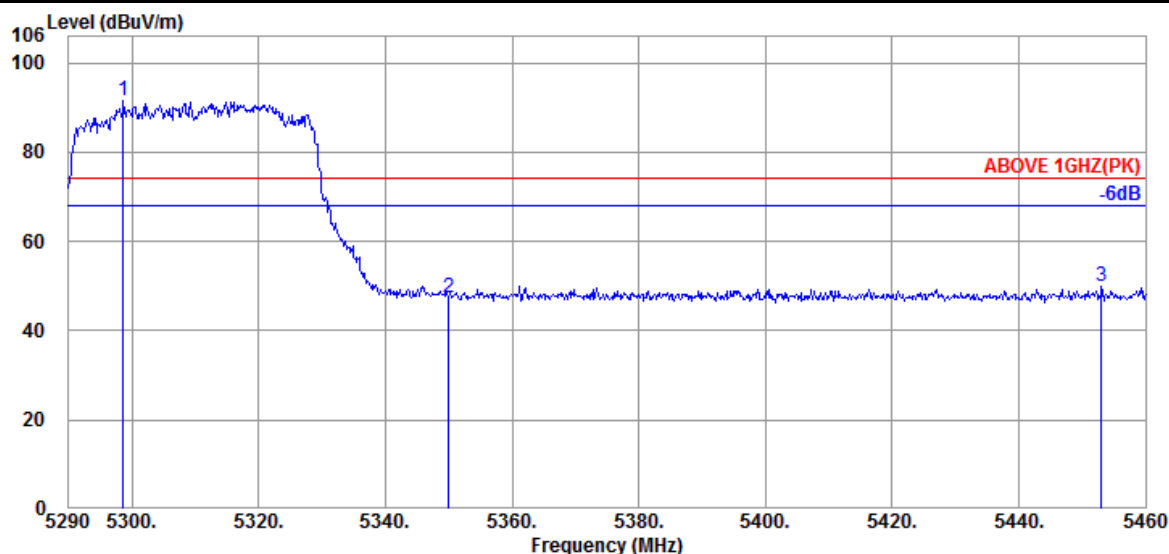

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5298.670	34.60	10.81	34.33	80.40	91.48	---	---	Peak
	5350.010	34.60	10.83	34.31	36.39	47.51	74.00	20.99	Peak
	5453.030	34.70	10.89	34.28	38.45	49.76	74.00	18.50	Peak

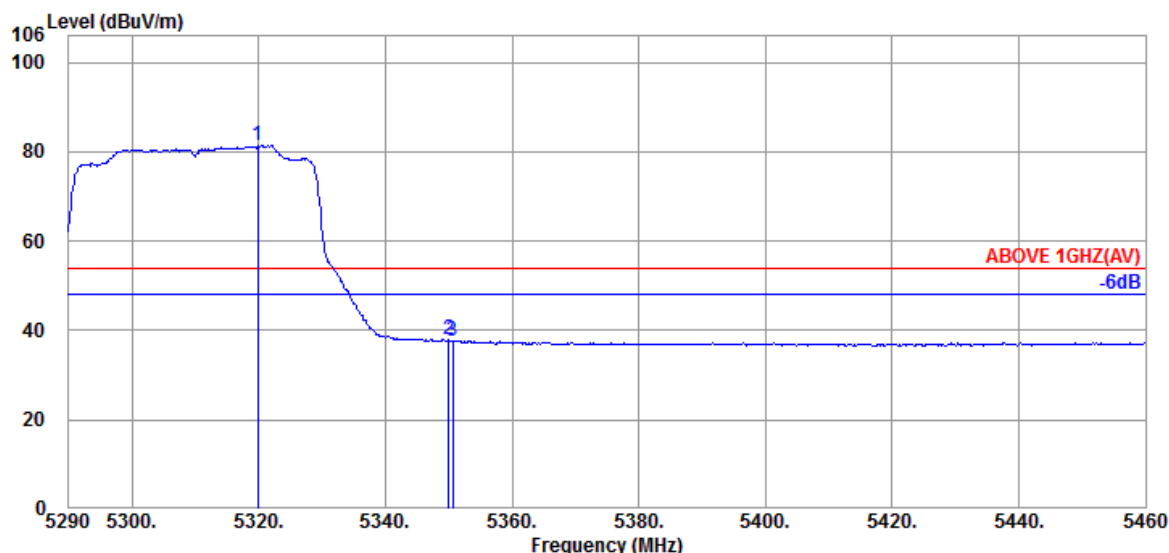

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5319.920	34.60	10.81	34.33	70.29	81.37	---	---	Average
	5350.010	34.60	10.83	34.31	26.72	37.84	54.00	10.88	Average
	5350.690	34.60	10.83	34.31	26.63	37.75	54.00	10.29	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Band	NII-2A
		Frequency	TX 5310MHz

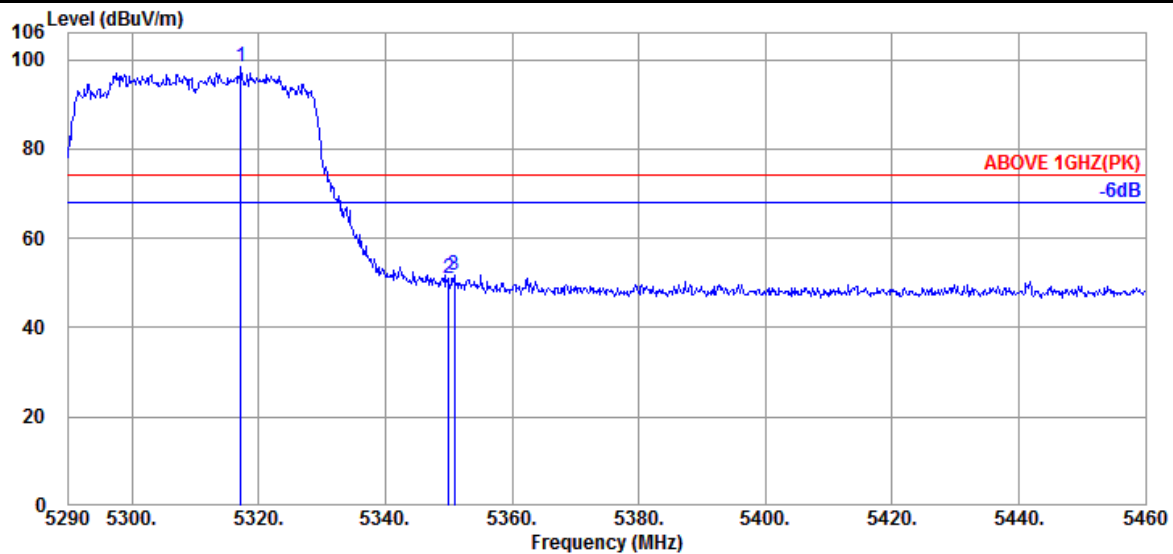

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5317.200	34.60	10.81	34.33	87.15	98.23	---	---	Peak
	5350.010	34.60	10.83	34.31	39.91	51.03	74.00	20.22	Peak
	5350.860	34.60	10.83	34.31	40.68	51.80	74.00	18.05	Peak

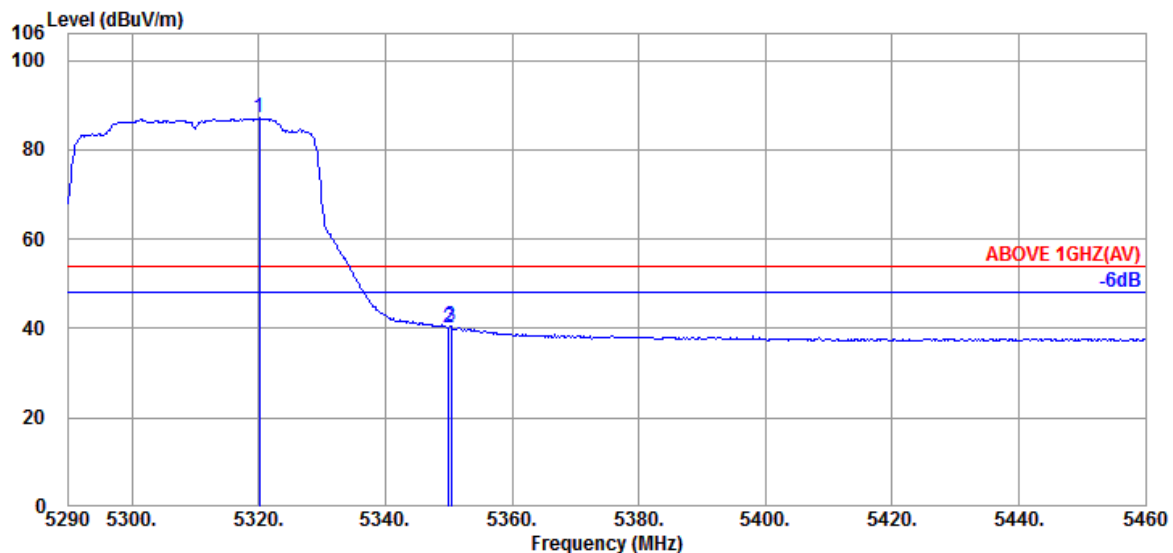

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5320.090	34.60	10.81	34.33	75.94	87.02	---	---	Average
	5350.010	34.60	10.83	34.31	28.92	40.04	54.00	9.35	Average
	5350.350	34.60	10.83	34.31	29.23	40.35	54.00	9.37	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Band	NII-2C
		Frequency	TX 5510MHz

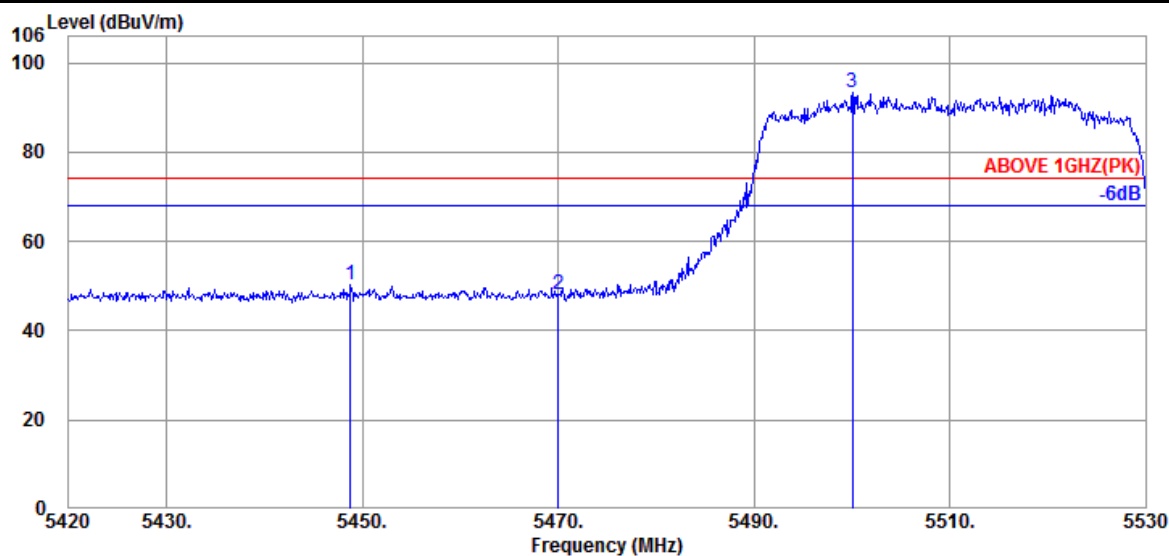

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5448.820	34.70	10.89	34.29	38.86	50.16	74.00	18.43	Peak
5470.050	34.67	10.91	34.28	36.96	48.26	74.00	20.65	Peak
@ 5500.080	34.60	10.93	34.27	82.22	93.48	---	---	Peak

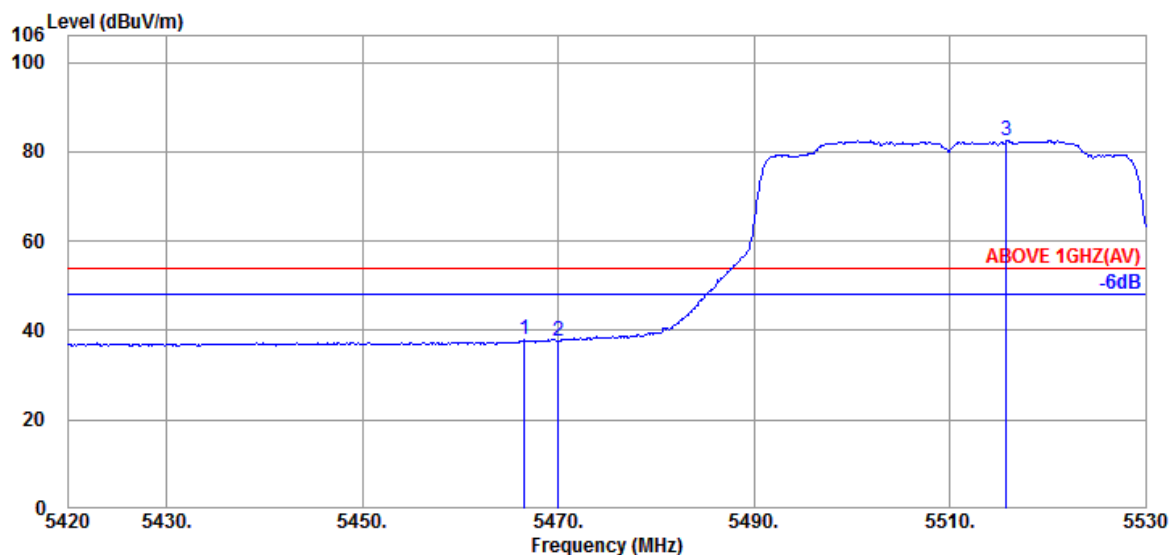

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.530	34.67	10.91	34.28	26.52	37.82	54.00	10.08	Average
5470.050	34.67	10.91	34.28	26.27	37.57	54.00	10.55	Average
@ 5515.810	34.60	10.93	34.28	71.20	82.45	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM2010181


Report Number: EM-F200514

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Band	NII-2C
		Frequency	TX 5510MHz

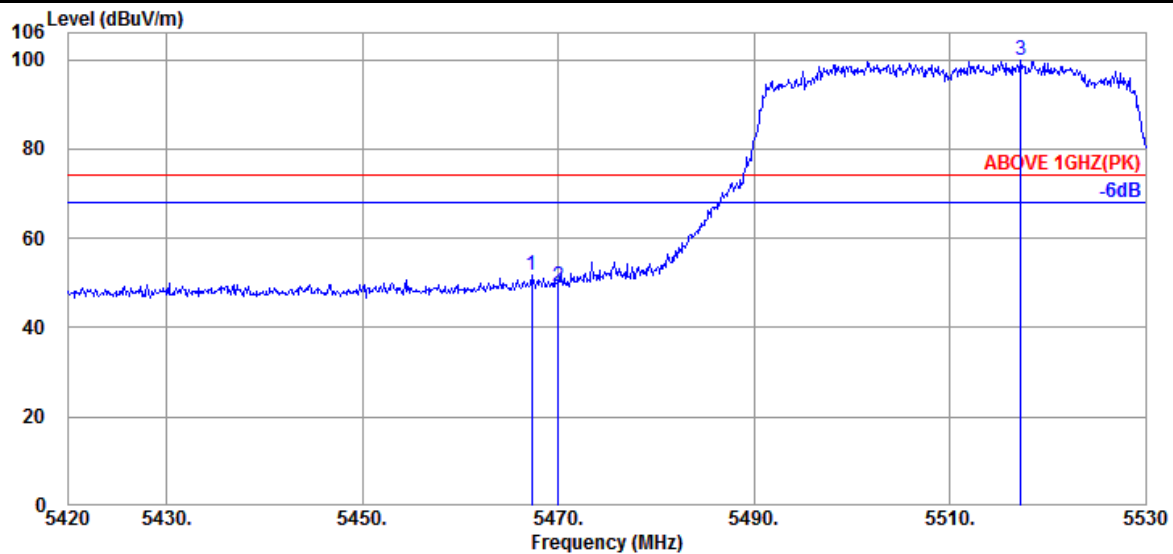

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.300	34.67	10.91	34.28	40.48	51.78	74.00	18.55	Peak
5470.050	34.67	10.91	34.28	37.72	49.02	74.00	19.66	Peak
@ 5517.240	34.60	10.93	34.28	88.75	100.00	---	---	Peak

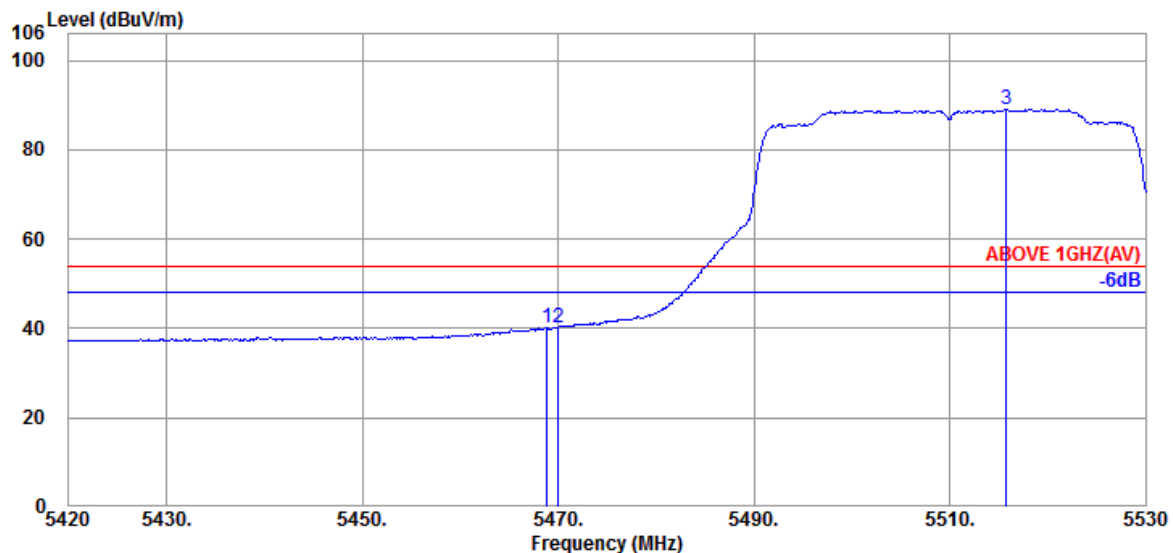


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.840	34.67	10.91	34.28	28.85	40.15	54.00	9.45	Average
5470.050	34.67	10.91	34.28	28.87	40.17	54.00	9.39	Average
@ 5515.810	34.60	10.93	34.28	77.76	89.01	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-2C
		Frequency	TX 5670MHz

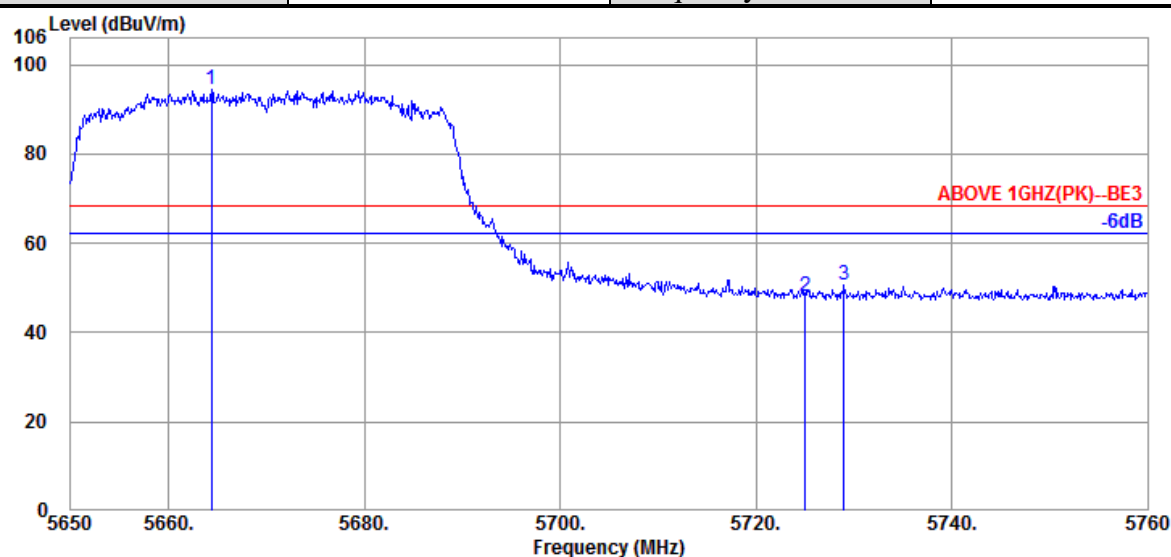

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5664.410	34.67	11.01	34.35	83.10	94.43	---	---	Peak
5725.020	34.80	11.05	34.37	36.73	48.21	68.20	13.80	Peak
5728.980	34.80	11.05	34.38	39.14	50.61	68.20	12.75	Peak

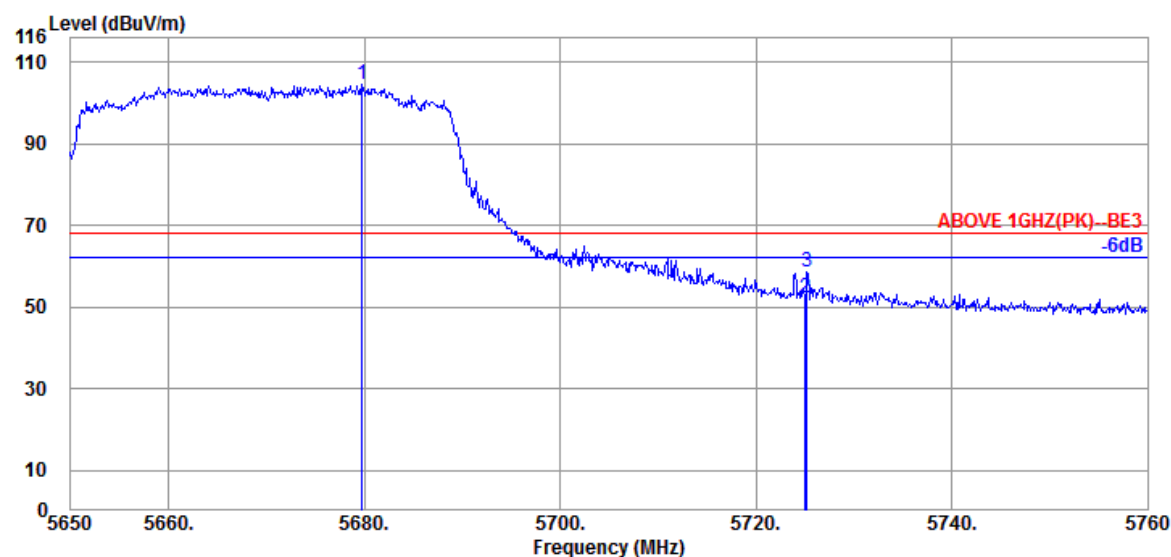

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5679.810	34.73	11.03	34.36	93.04	104.44	---	---	Peak
5725.020	34.80	11.05	34.37	40.81	52.29	68.20	14.73	Peak
5725.240	34.80	11.05	34.37	47.06	58.54	68.20	11.14	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Band	NII-2C
		Frequency	TX 5710MHz

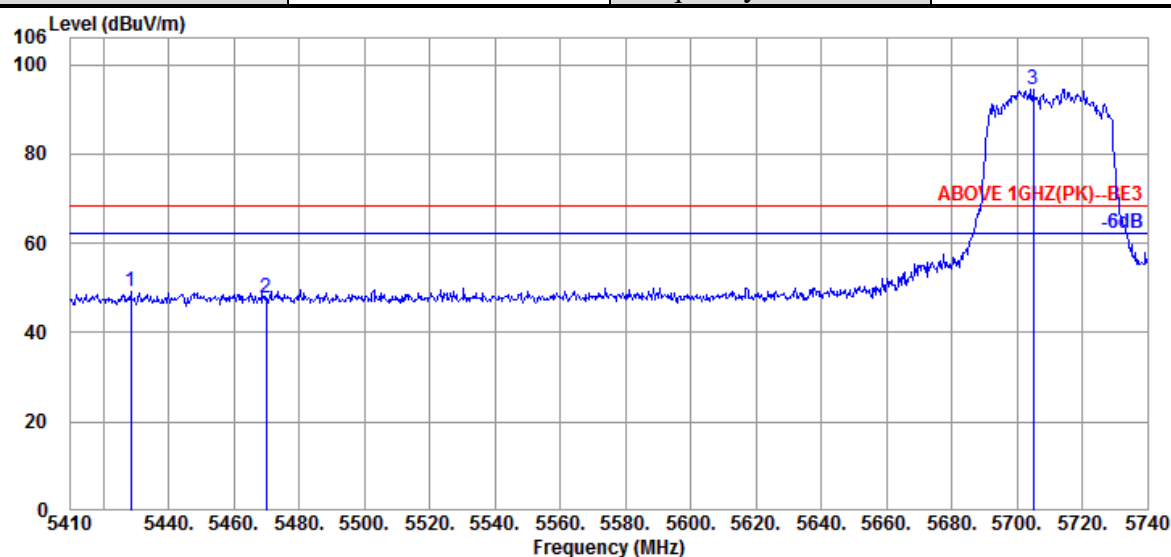

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5428.480	34.65	10.89	34.29	37.90	49.15	68.20	13.02	Peak
5470.060	34.67	10.91	34.28	36.29	47.59	68.20	15.80	Peak
@ 5705.020	34.80	11.03	34.36	83.13	94.60	---	---	Peak

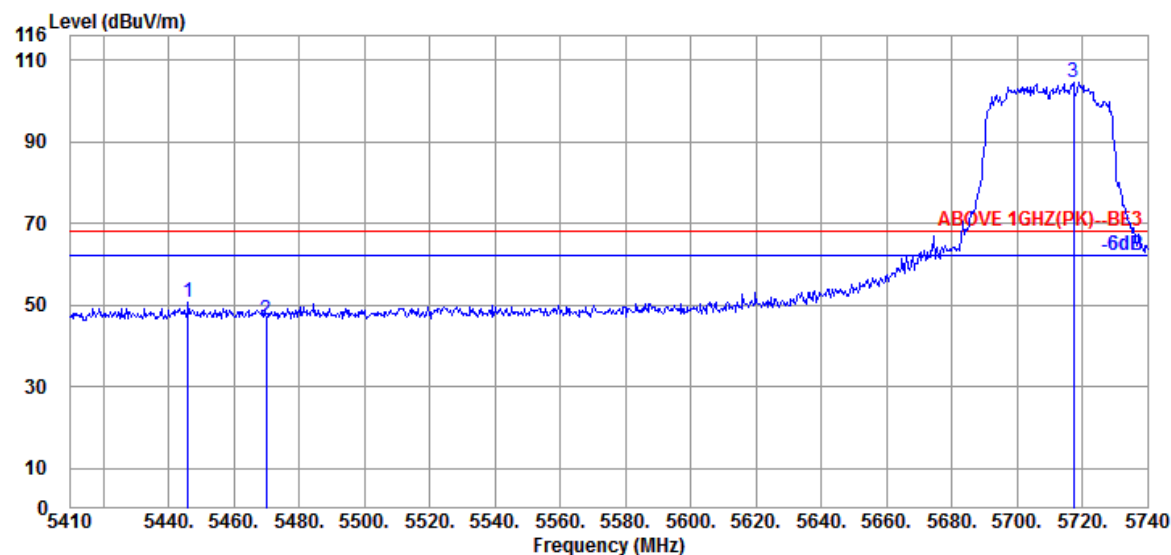

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5445.970	34.67	10.89	34.29	39.52	50.79	68.20	10.65	Peak
5470.060	34.67	10.91	34.28	34.89	46.19	68.20	14.62	Peak
@ 5717.230	34.80	11.05	34.37	93.12	104.60	---	---	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM2010181

Report Number: EM-F200514


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ax-HE40	Band	NII-2C
		Frequency	TX 5710MHz

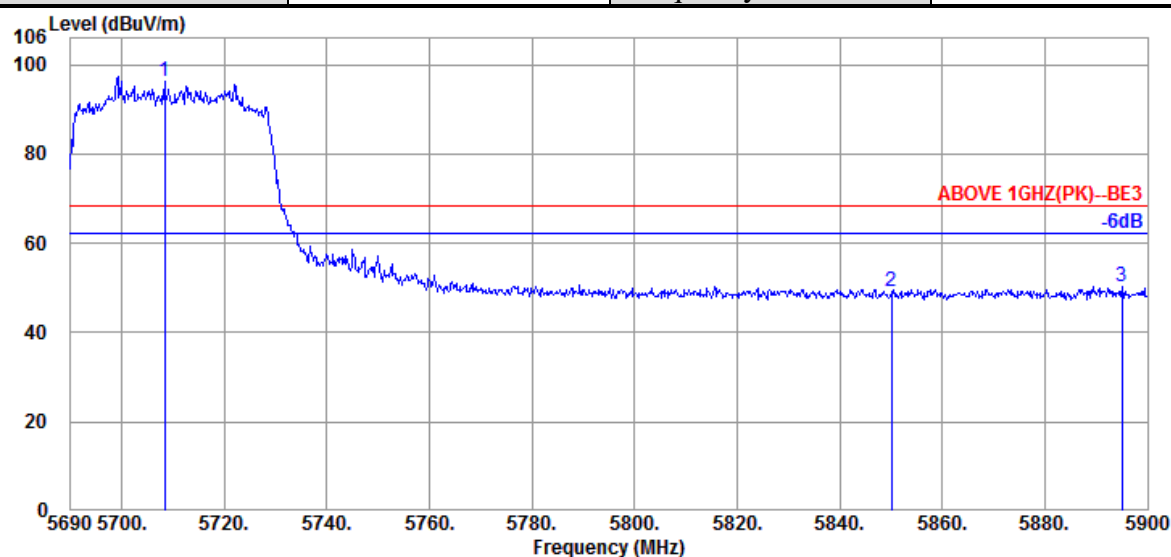

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.270	34.80	11.03	34.37	84.61	96.07	---	---	Peak
5850.020	35.40	11.10	34.43	37.12	49.19	68.20	14.59	Peak
5894.960	35.40	11.12	34.45	38.21	50.28	68.20	12.57	Peak

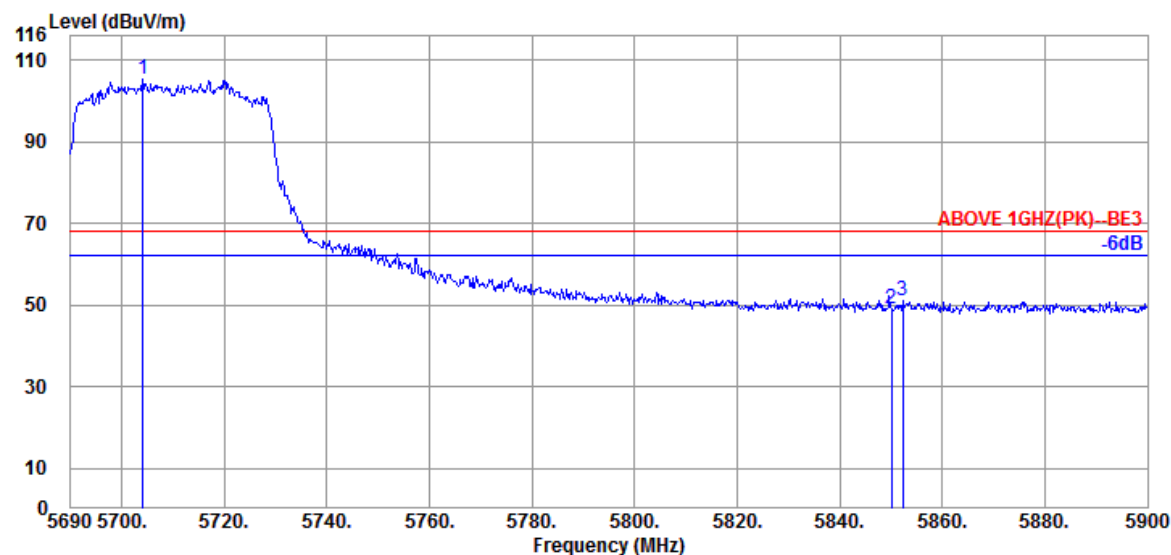

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5704.070	34.80	11.03	34.36	93.80	105.27	---	---	Peak
5850.020	35.40	11.10	34.43	37.18	49.25	68.20	14.49	Peak
5852.330	35.40	11.10	34.43	38.92	50.99	68.20	11.88	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Band	NII-III
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

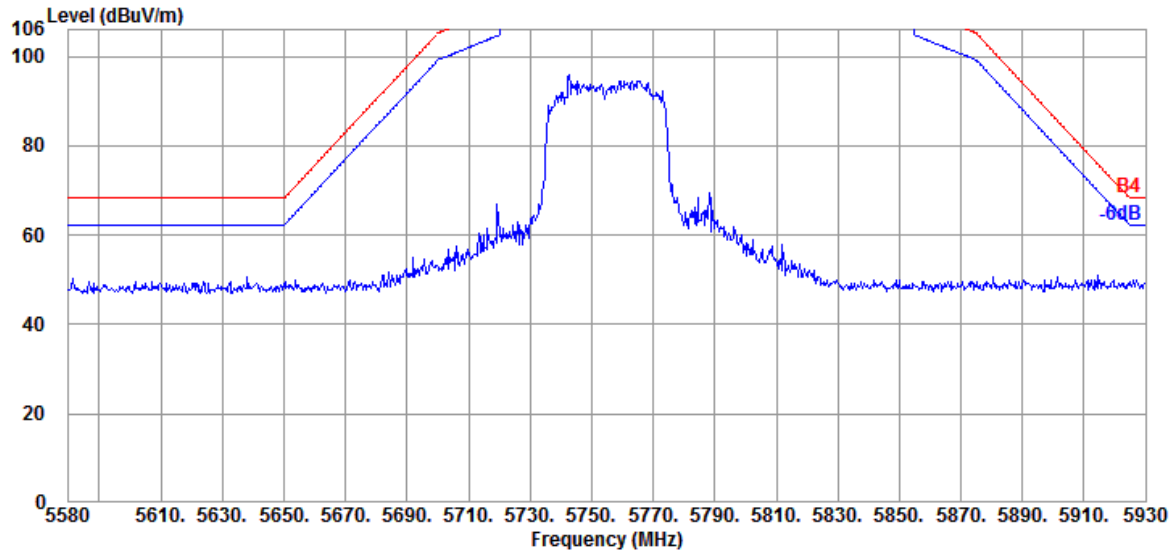

Antenna at Vertical Polarization

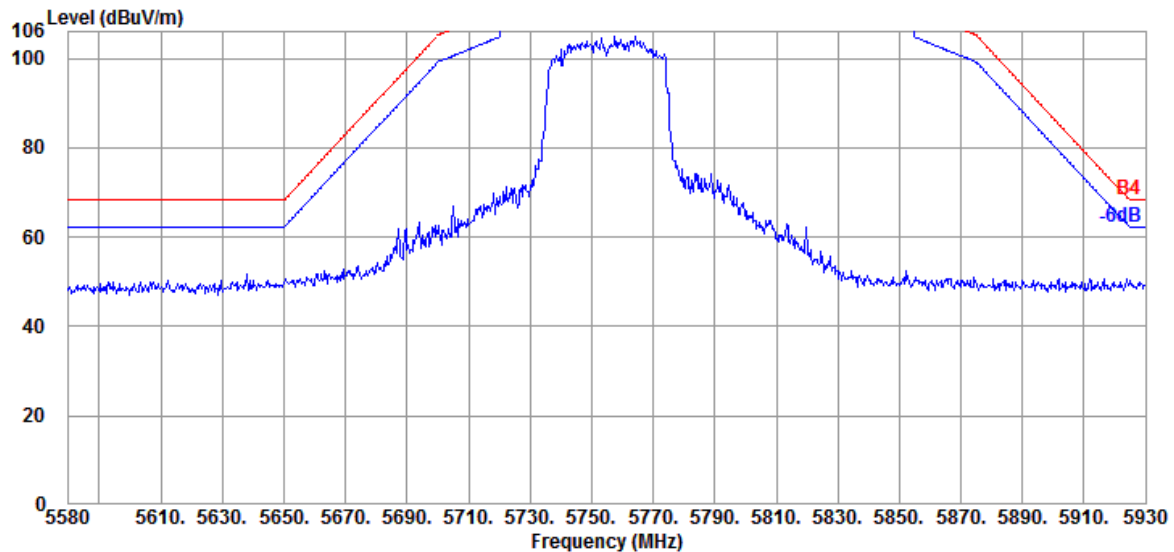


Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Band	NII-III
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

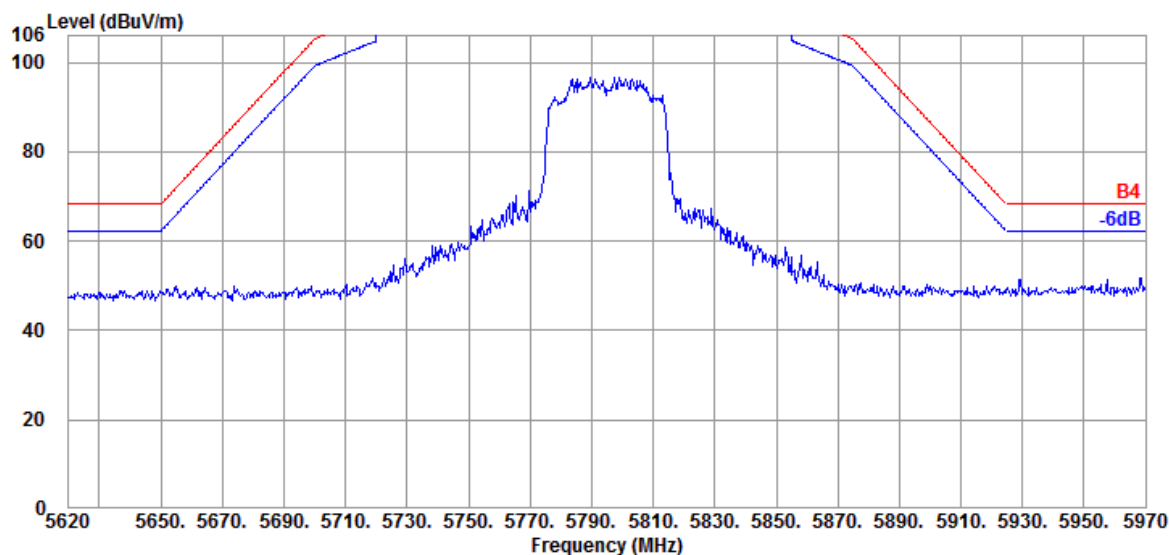


Antenna at Vertical Polarization

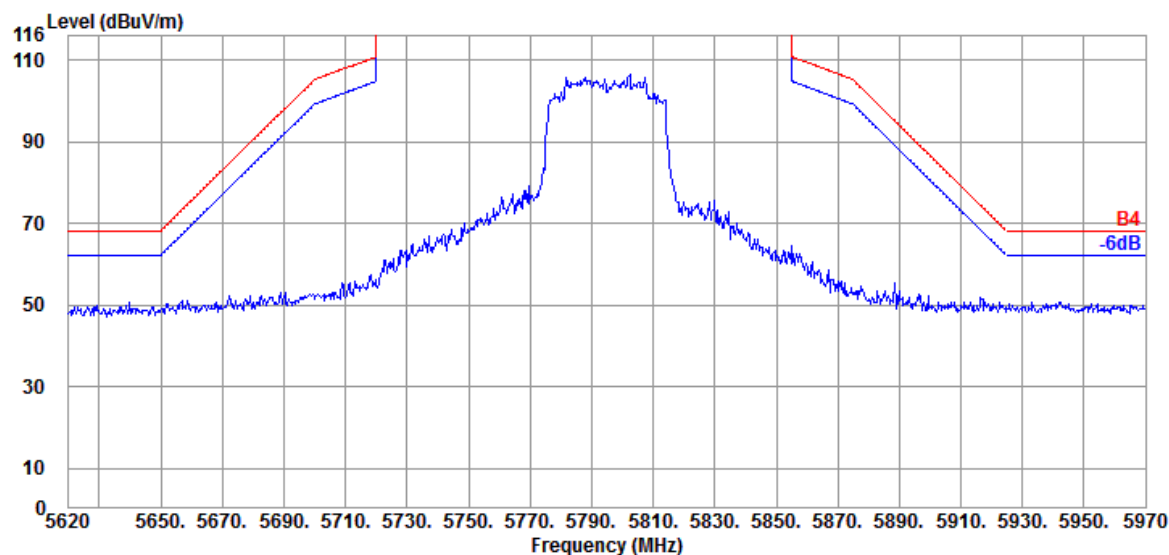

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	Band	NII-I
		Frequency	TX 5210MHz

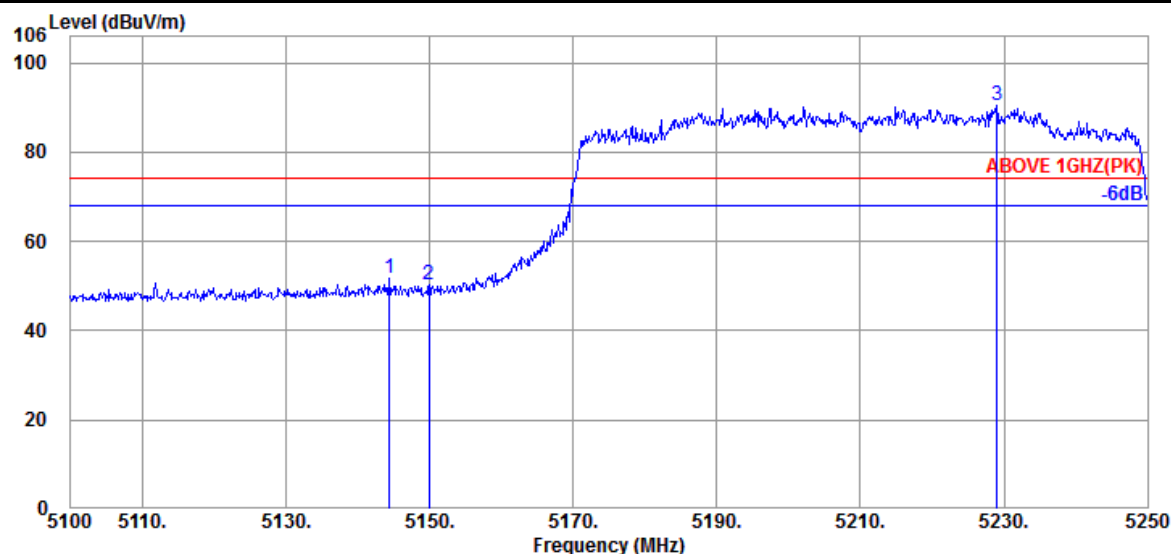

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.400	34.40	10.70	34.38	41.09	51.81	74.00	19.38	Peak
5149.950	34.40	10.70	34.38	39.63	50.35	74.00	21.30	Peak
@ 5229.000	34.50	10.76	34.35	79.56	90.47	---	---	Peak

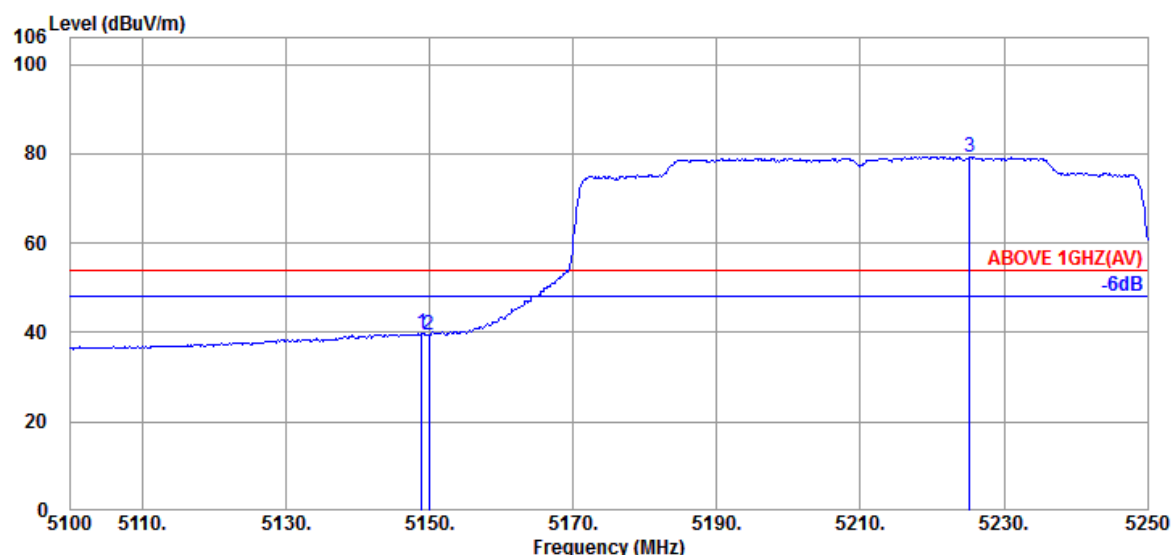

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.900	34.40	10.70	34.38	29.06	39.78	54.00	11.19	Average
5149.950	34.40	10.70	34.38	28.69	39.41	54.00	11.45	Average
@ 5225.250	34.50	10.76	34.35	68.49	79.40	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	Band	NII-I
		Frequency	TX 5210MHz

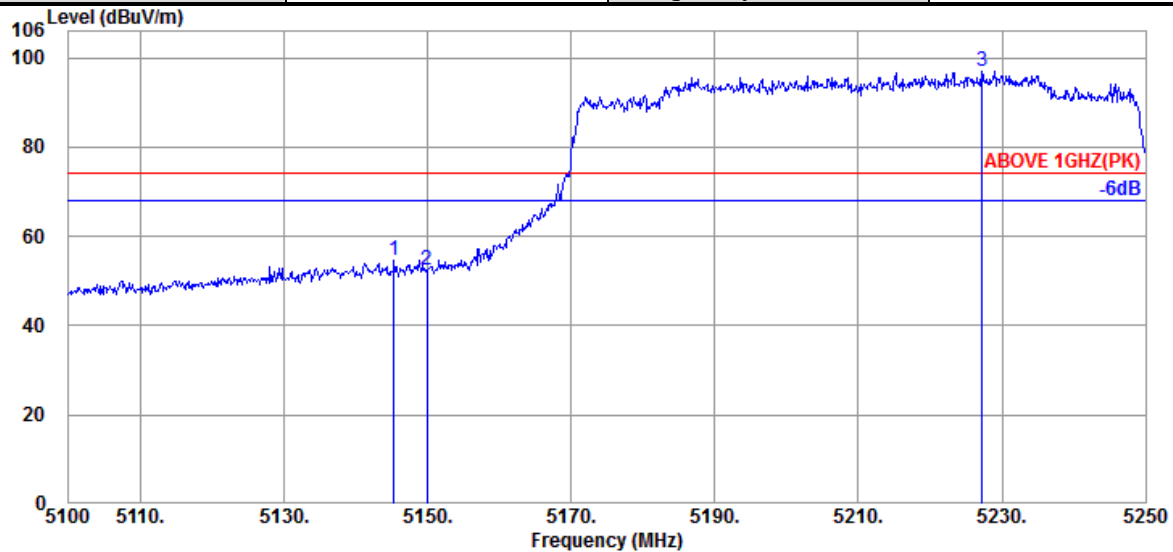

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.300	34.40	10.70	34.38	43.94	54.66	74.00	18.88	Peak
5149.950	34.40	10.70	34.38	41.88	52.60	74.00	20.61	Peak
@ 5227.200	34.50	10.76	34.35	86.22	97.13	---	---	Peak

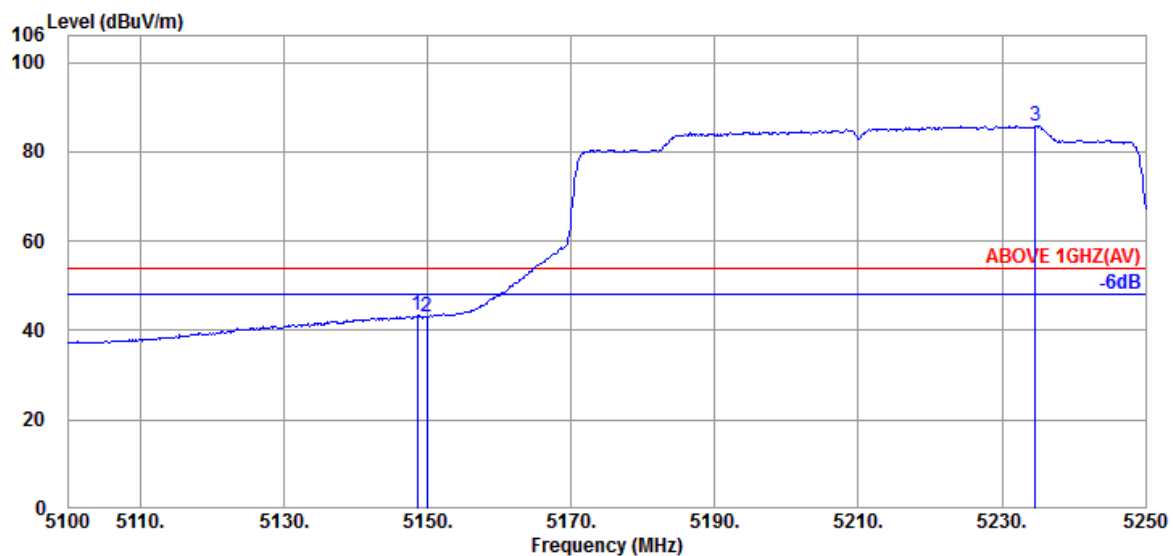


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.600	34.40	10.70	34.38	32.63	43.35	54.00	10.42	Average
5149.950	34.40	10.70	34.38	32.40	43.12	54.00	10.71	Average
@ 5234.700	34.50	10.76	34.35	74.79	85.70	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	Band	NII-2A
		Frequency	TX 5290MHz

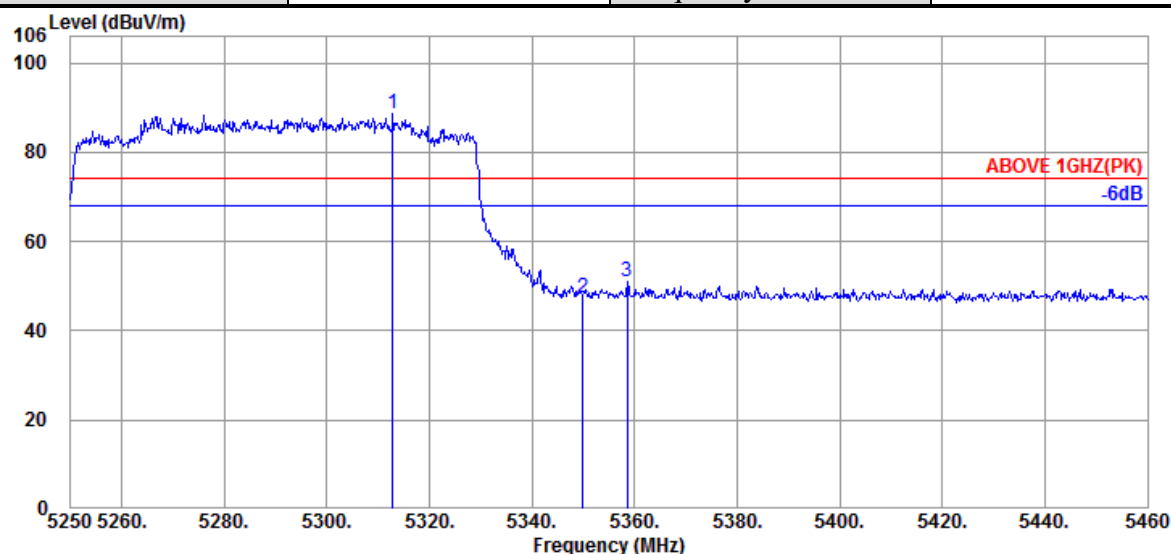

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5312.790	34.60	10.81	34.33	77.42	88.50	---	---	Peak
	5349.960	34.60	10.83	34.31	36.39	47.51	74.00	19.19	Peak
	5358.570	34.60	10.85	34.31	39.91	51.05	74.00	17.87	Peak

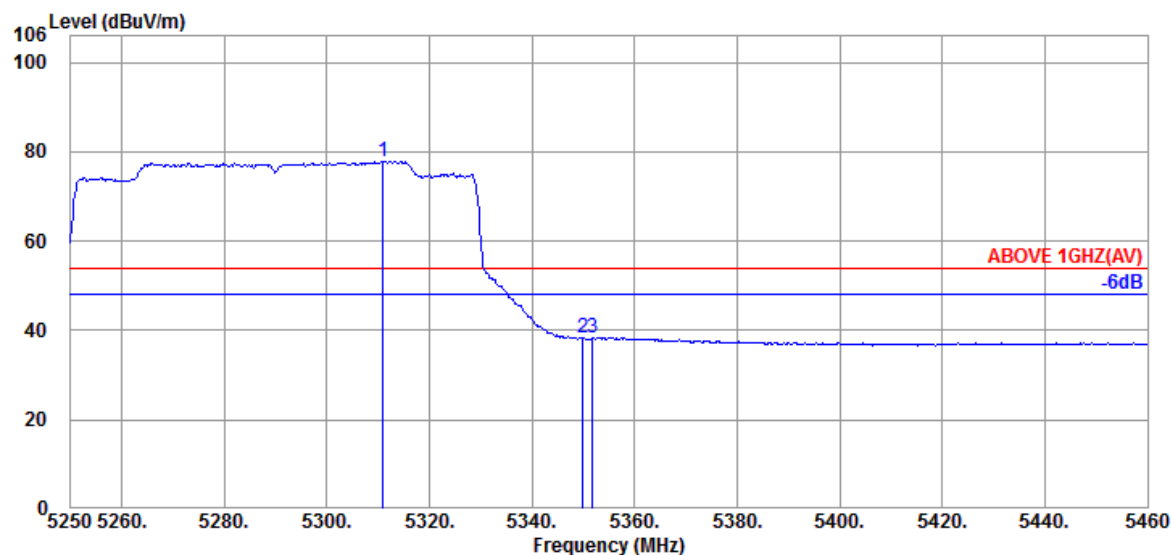

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5310.900	34.60	10.81	34.33	66.84	77.92	---	---	Average
	5349.960	34.60	10.83	34.31	27.30	38.42	54.00	10.79	Average
	5351.850	34.60	10.83	34.31	27.37	38.49	54.00	10.20	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	Band	NII-2A
		Frequency	TX 5290MHz

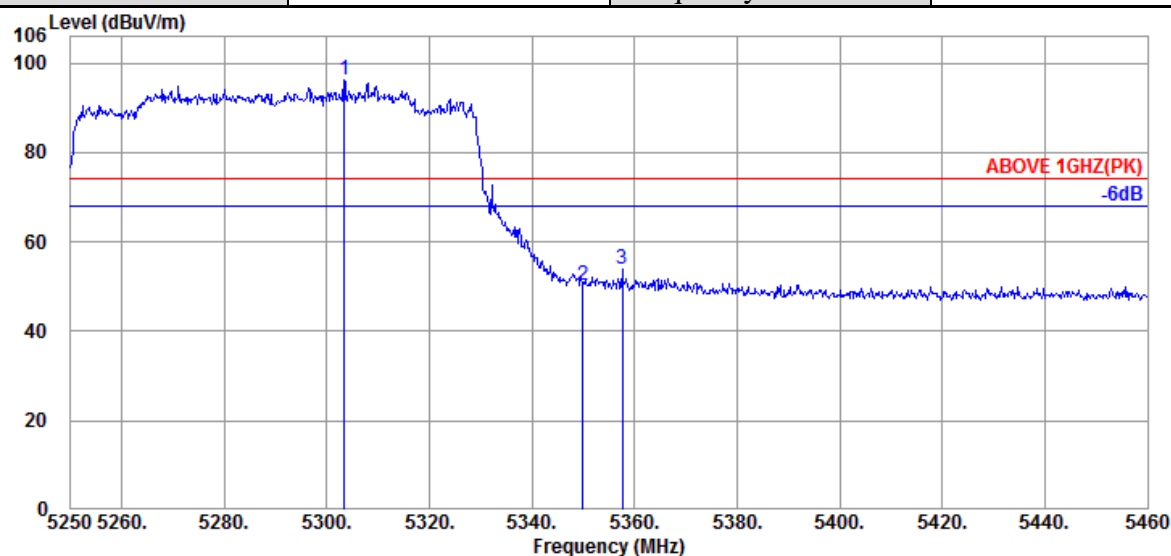

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5303.340	34.60	10.81	34.33	85.02	96.10	---	---	Peak
5349.960	34.60	10.83	34.31	39.32	50.44	74.00	20.88	Peak
5357.520	34.60	10.85	34.31	42.88	54.02	74.00	18.14	Peak

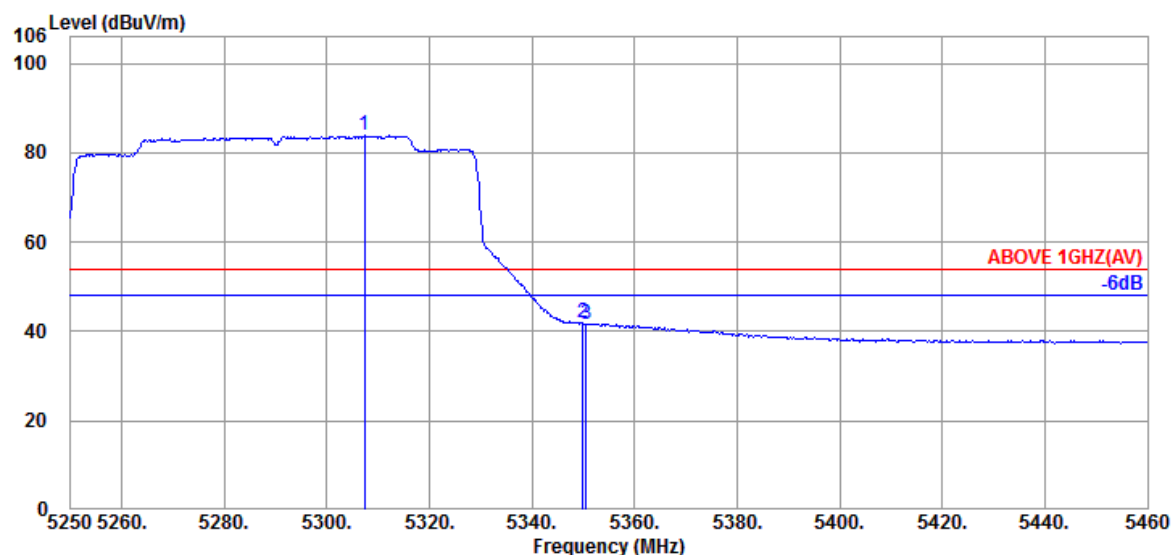

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5307.330	34.60	10.81	34.33	72.70	83.78	---	---	Average
5349.960	34.60	10.83	34.31	30.99	42.11	54.00	10.07	Average
5350.590	34.60	10.83	34.31	30.66	41.78	54.00	9.80	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM2010181


Report Number: EM-F200514

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	Band	NII-2C
		Frequency	TX 5530MHz

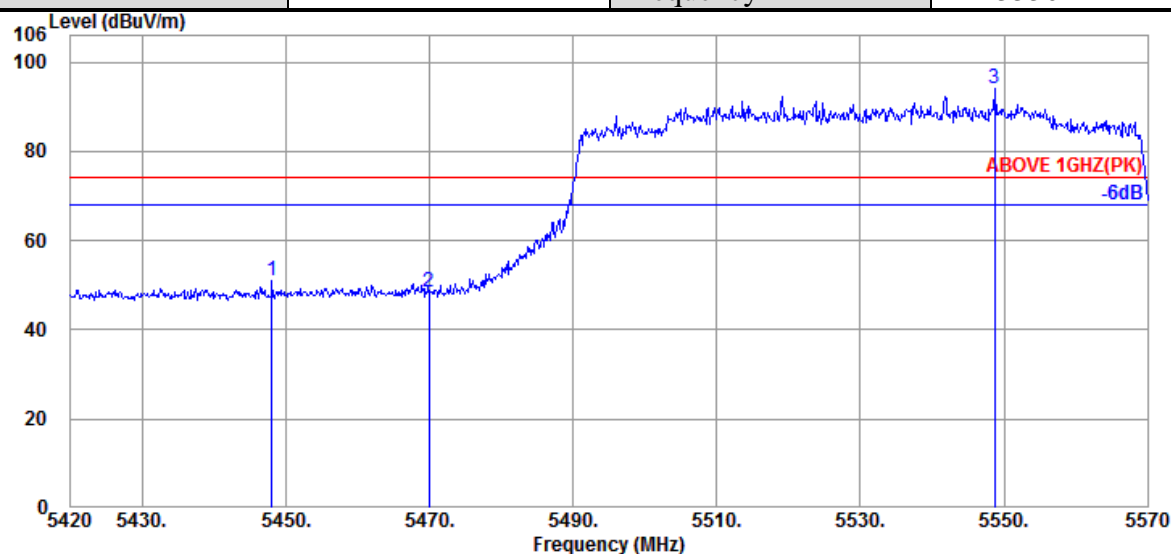

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5448.050	34.70	10.89	34.29	39.68	50.98	74.00	18.12	Peak
5469.950	34.67	10.91	34.28	37.19	48.49	74.00	20.66	Peak
@ 5548.700	34.60	10.95	34.30	82.67	93.92	---	---	Peak

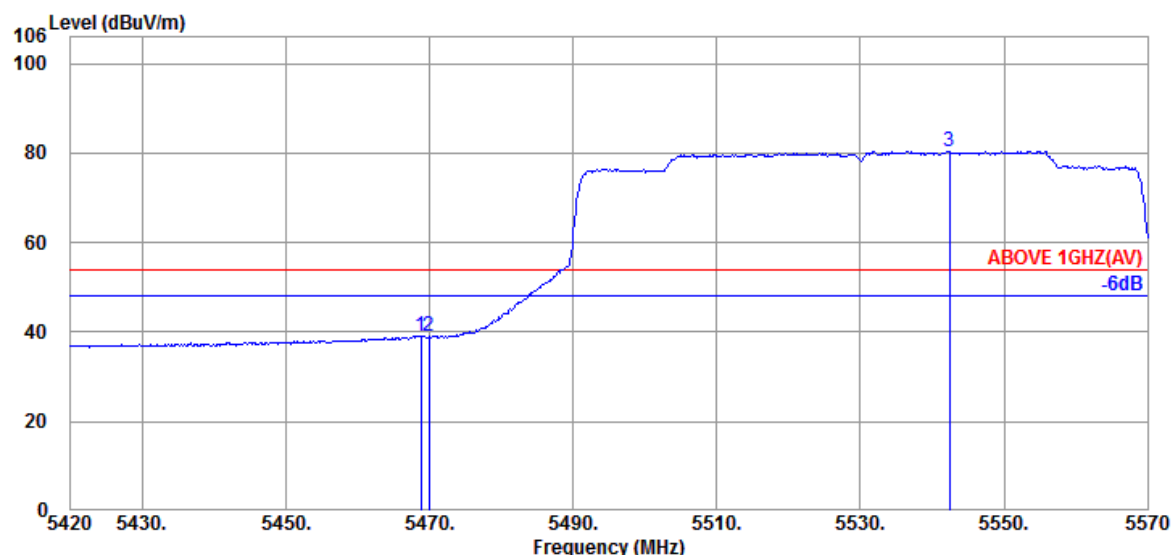

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.750	34.67	10.91	34.28	27.92	39.22	54.00	10.20	Average
5469.950	34.67	10.91	34.28	27.60	38.90	54.00	10.45	Average
@ 5542.400	34.60	10.95	34.30	69.24	80.49	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	Band	NII-2C
		Frequency	TX 5530MHz

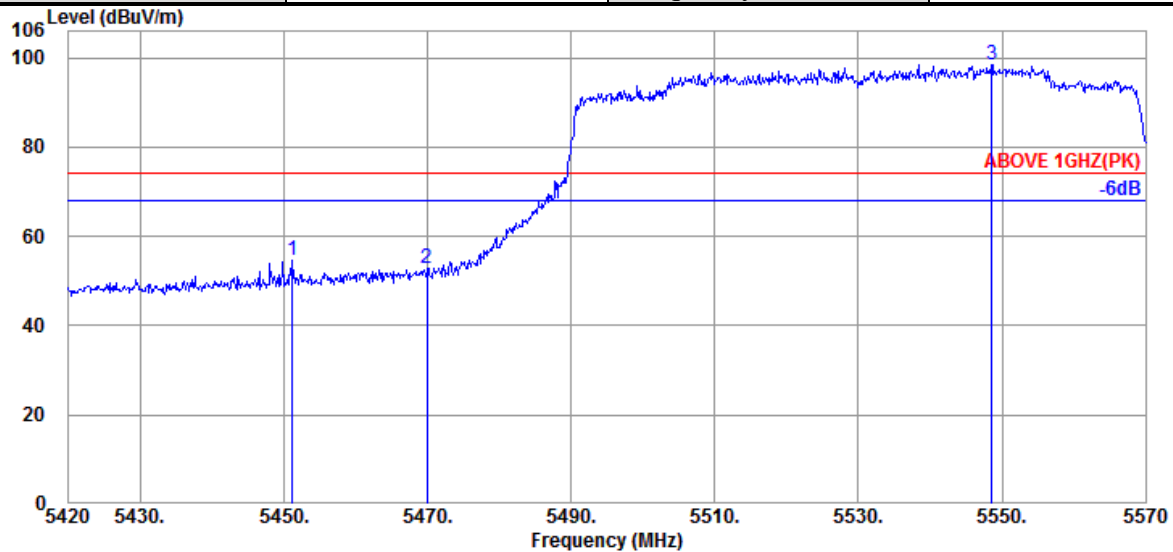

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.200	34.70	10.89	34.29	43.42	54.72	74.00	18.10	Peak
5469.950	34.67	10.91	34.28	41.56	52.86	74.00	20.39	Peak
@ 5548.550	34.60	10.95	34.30	87.27	98.52	---	---	Peak

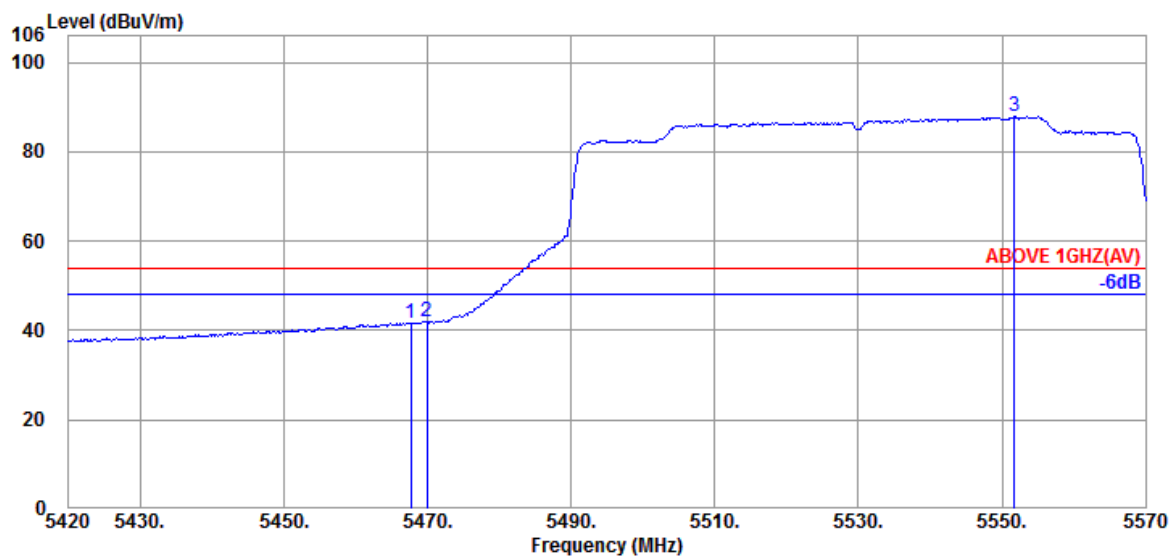

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.700	34.67	10.91	34.28	30.48	41.78	54.00	9.61	Average
5469.950	34.67	10.91	34.28	30.52	41.82	54.00	9.58	Average
@ 5551.700	34.60	10.95	34.30	76.63	87.88	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	Band	NII-2C
		Frequency	TX 5610MHz

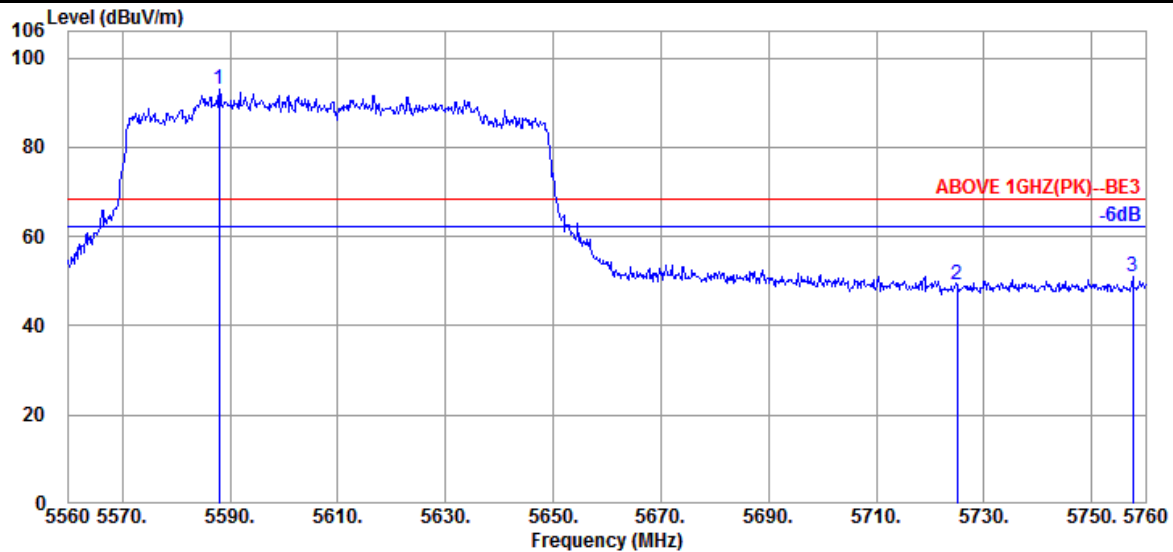

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5588.000	34.60	10.97	34.31	81.86	93.12	---	---	Peak
5725.000	34.80	11.05	34.37	37.87	49.35	68.20	15.33	Peak
5757.600	34.90	11.06	34.39	39.27	50.84	68.20	12.77	Peak

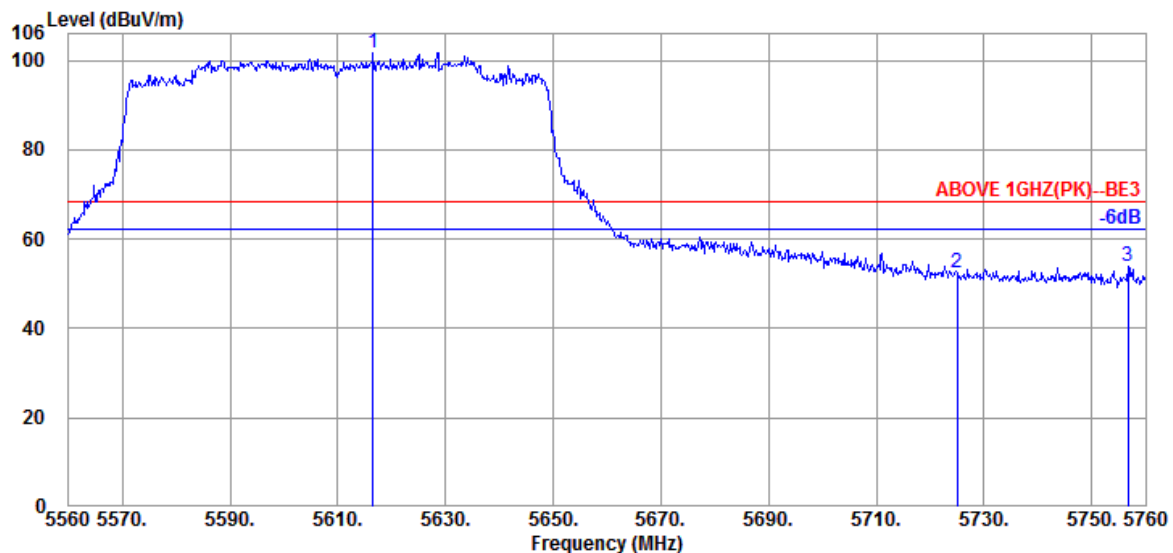

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5616.600	34.60	10.99	34.33	90.42	101.68	---	---	Peak
5725.000	34.80	11.05	34.37	40.99	52.47	68.20	14.54	Peak
5756.800	34.90	11.06	34.39	42.19	53.76	68.20	11.27	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM2010181

Report Number: EM-F200514

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	Band	NII-2C
		Frequency	TX 5690MHz

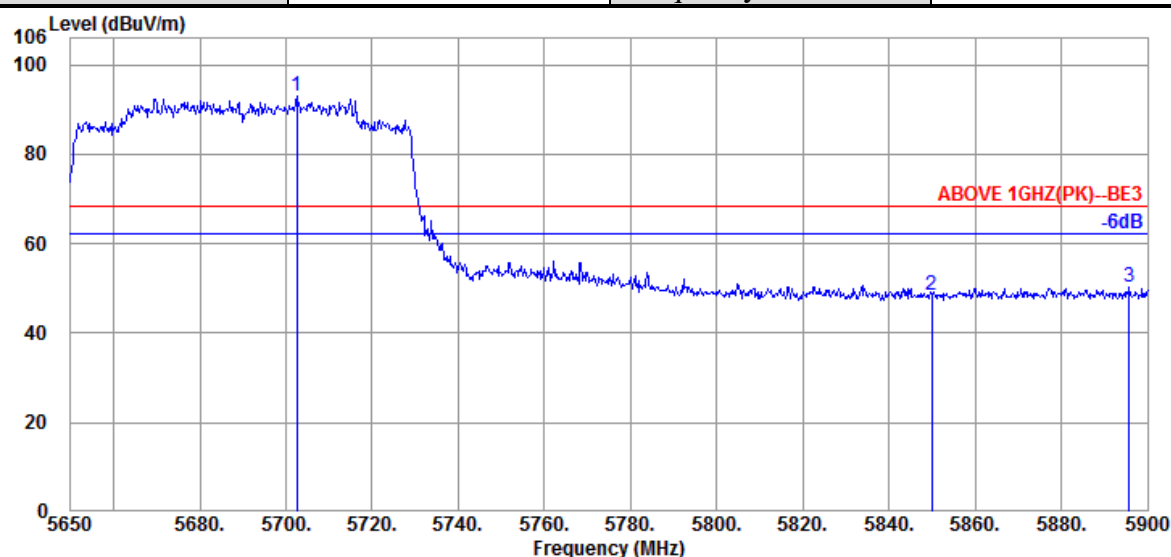

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.500	34.80	11.03	34.36	81.60	93.07	---	---	Peak
5850.000	35.40	11.10	34.43	36.38	48.45	68.20	14.69	Peak
5895.750	35.40	11.14	34.45	38.03	50.12	68.20	12.61	Peak

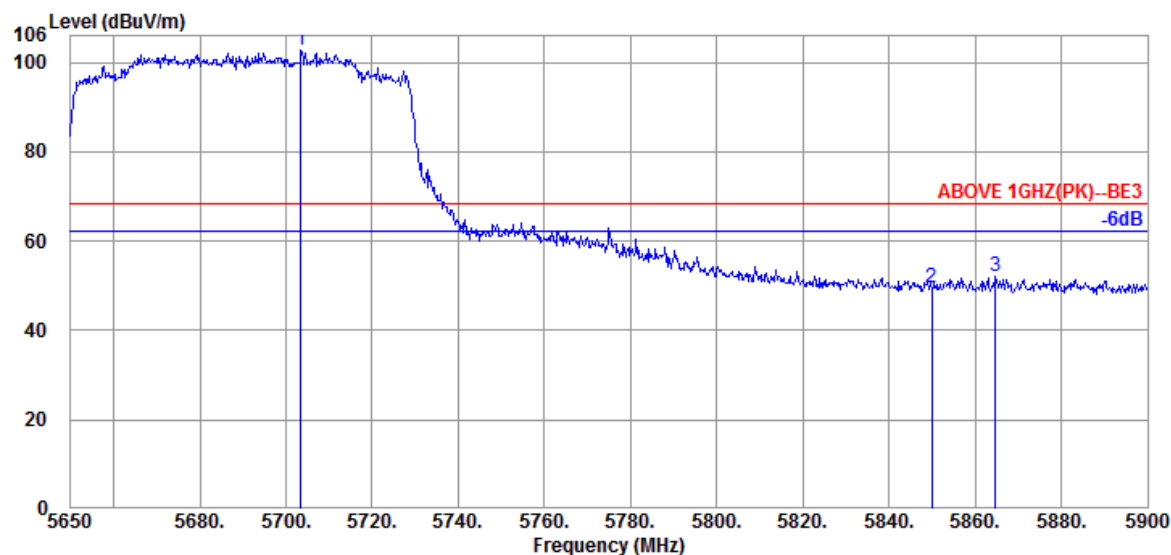

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.500	34.80	11.03	34.36	91.11	102.58	---	---	Peak
5850.000	35.40	11.10	34.43	37.63	49.70	68.20	15.08	Peak
5864.750	35.40	11.12	34.44	40.12	52.20	68.20	11.51	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM2010181


Report Number: EM-F200514

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	Band	NII-2C
		Frequency	TX 5690MHz

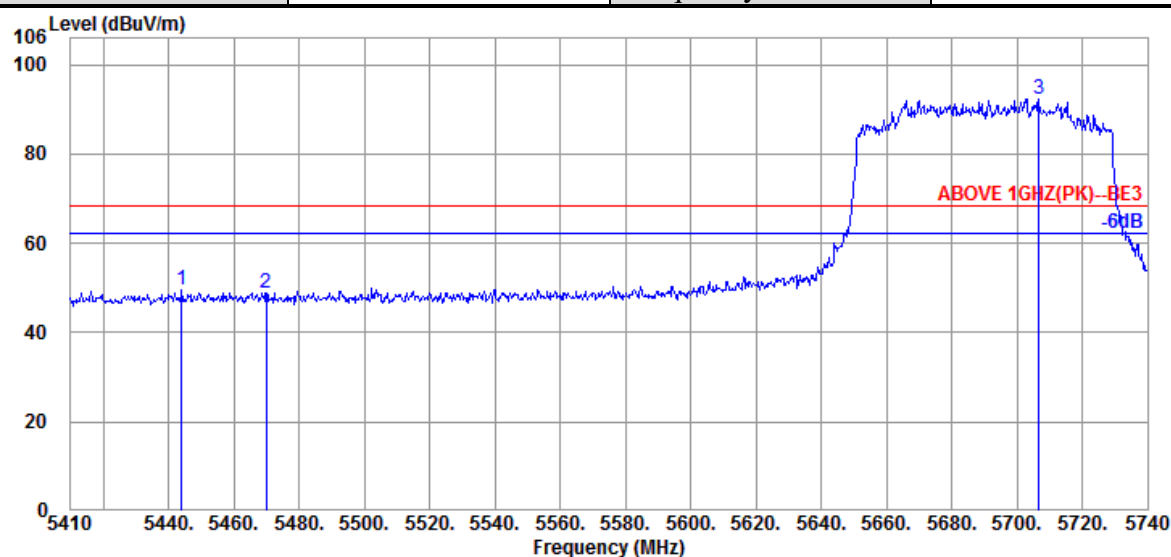

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5443.990	34.67	10.89	34.29	38.30	49.57	68.20	12.63	Peak
5470.060	34.67	10.91	34.28	37.46	48.76	68.20	14.27	Peak
@ 5706.670	34.80	11.03	34.36	80.76	92.23	---	---	Peak

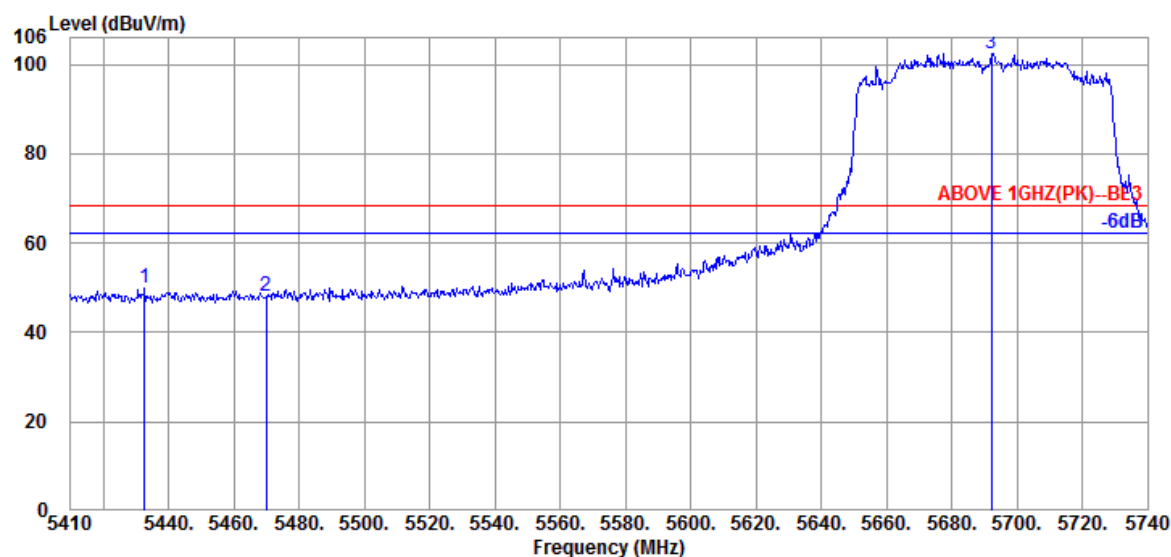

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5432.770	34.67	10.89	34.29	38.57	49.84	68.20	13.13	Peak
5470.060	34.67	10.91	34.28	36.78	48.08	68.20	14.08	Peak
@ 5692.150	34.80	11.03	34.36	91.07	102.54	---	---	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-HE80	Band	NII-III
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

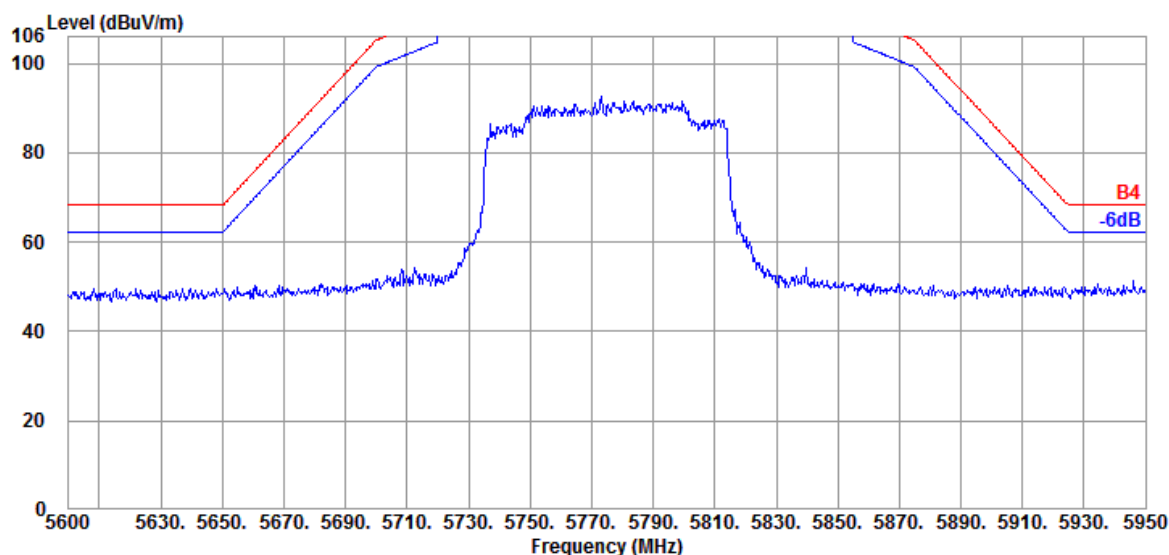


Antenna at Vertical Polarization

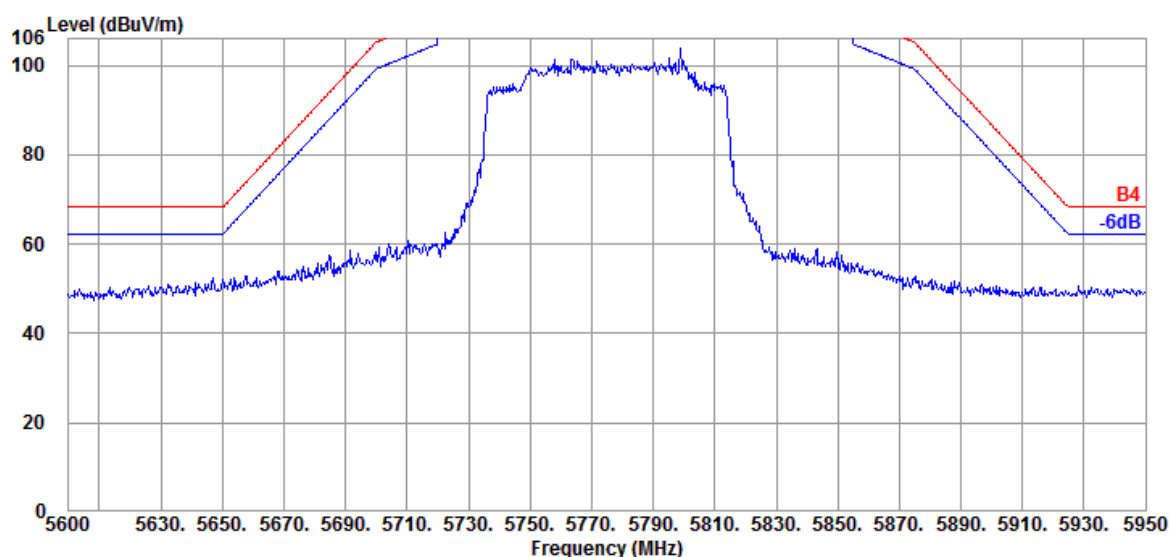

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	Band	NII-I & NII-2A
		Frequency	TX 5250MHz

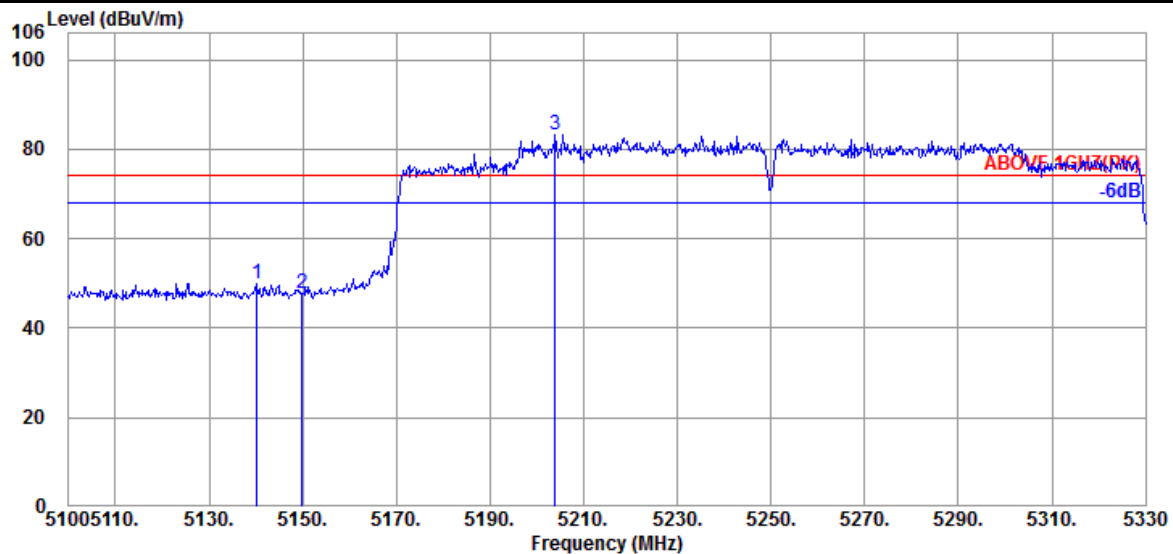

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5140.250	34.37	10.70	34.38	39.41	50.10	74.00	19.64	Peak
5149.910	34.40	10.70	34.38	37.18	47.90	74.00	20.01	Peak
@ 5203.960	34.50	10.74	34.36	72.37	83.25	---	---	Peak

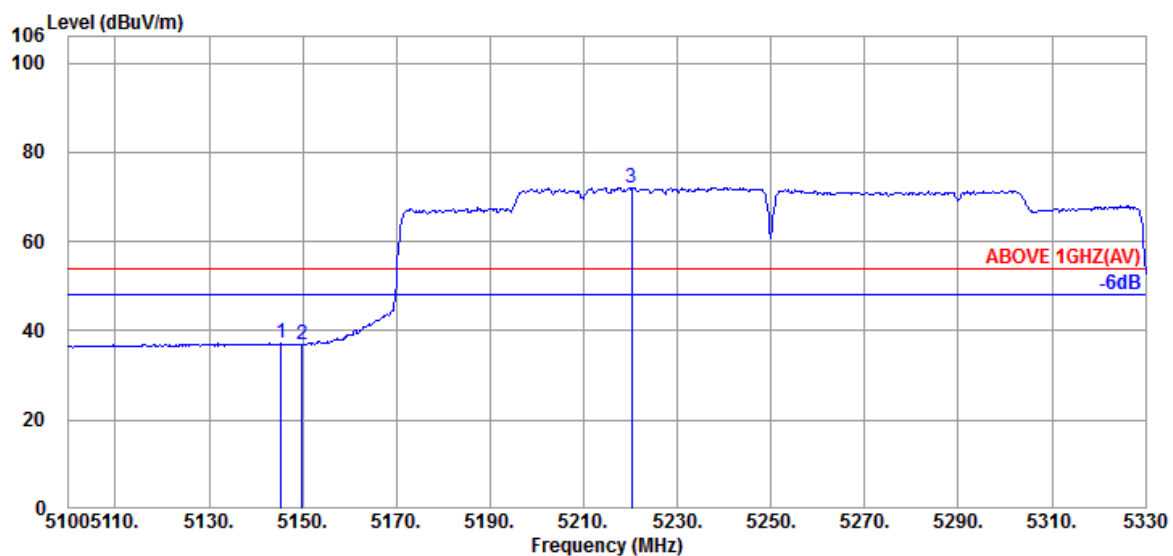


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.310	34.40	10.70	34.38	26.41	37.13	54.00	11.26	Average
5149.910	34.40	10.70	34.38	26.27	36.99	54.00	11.43	Average
@ 5220.290	34.50	10.74	34.36	61.26	72.14	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	Band	NII-I & NII-2A
		Frequency	TX 5250MHz

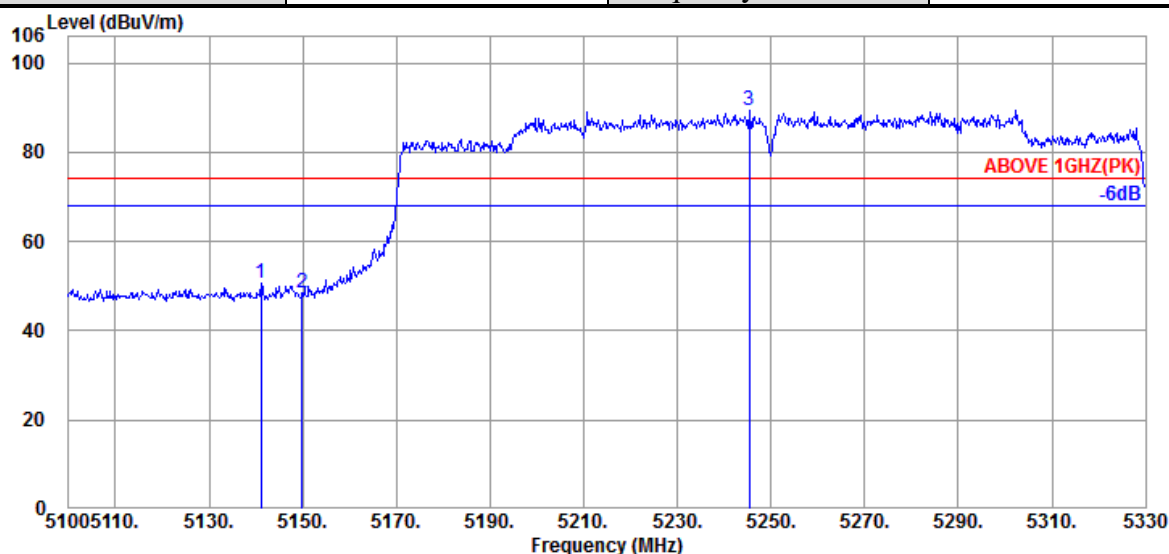

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.170	34.37	10.70	34.38	39.95	50.64	74.00	19.86	Peak
5149.910	34.40	10.70	34.38	37.91	48.63	74.00	21.20	Peak
@ 5245.360	34.50	10.76	34.35	78.37	89.28	---	---	Peak

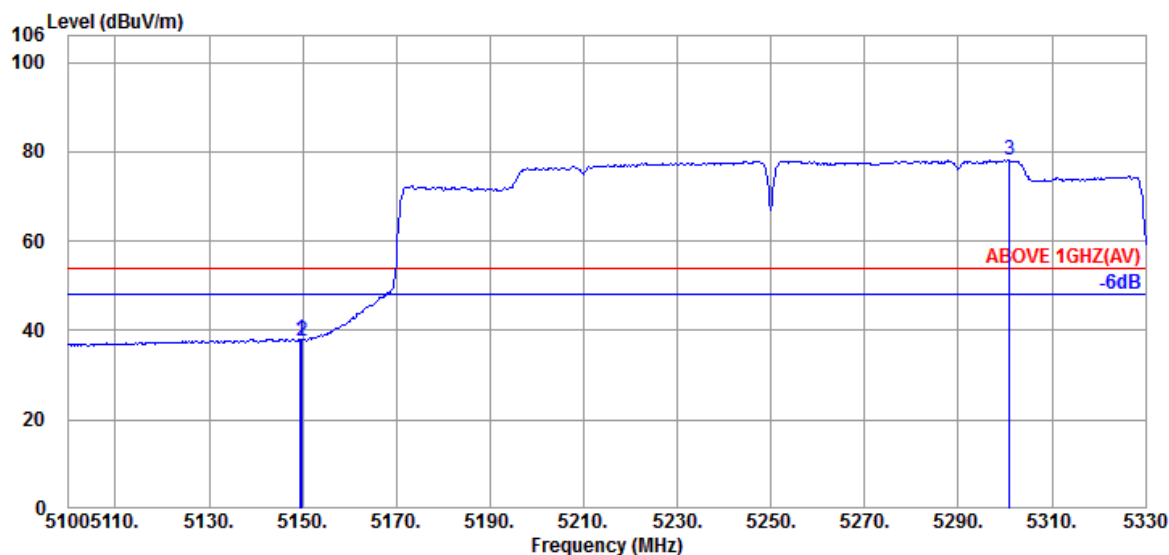

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.450	34.40	10.70	34.38	27.43	38.15	54.00	11.04	Average
5149.910	34.40	10.70	34.38	27.08	37.80	54.00	11.51	Average
@ 5301.020	34.60	10.81	34.33	66.95	78.03	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	Band	NII-I & NII-2A
		Frequency	TX 5250MHz

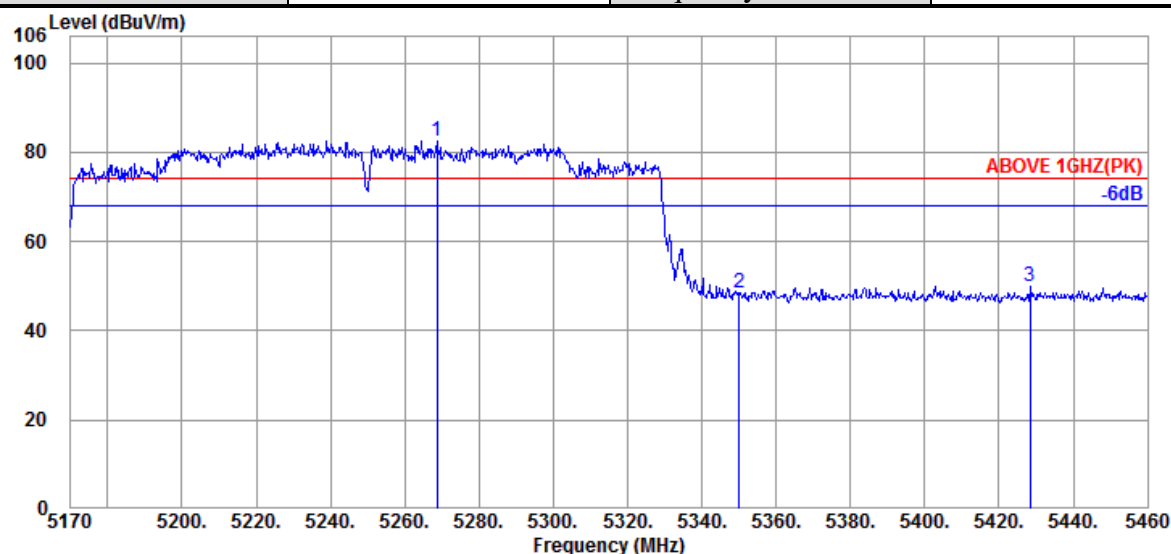

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5268.600	34.53	10.79	34.34	71.48	82.46	---	---	Peak
	5350.090	34.60	10.83	34.31	37.51	48.63	74.00	21.44	Peak
	5428.390	34.65	10.89	34.29	38.64	49.89	74.00	18.22	Peak

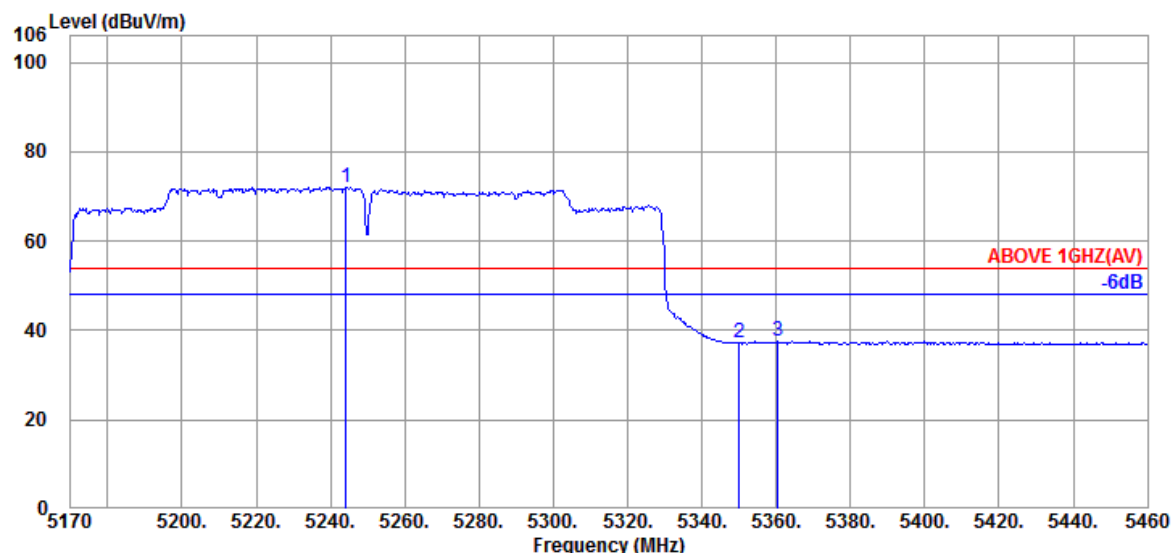


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5244.240	34.50	10.76	34.35	61.10	72.01	---	---	Average
	5350.090	34.60	10.83	34.31	26.05	37.17	54.00	10.84	Average
	5360.530	34.60	10.85	34.31	26.44	37.58	54.00	10.31	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	Band	NII-I & NII-2A
		Frequency	TX 5250MHz

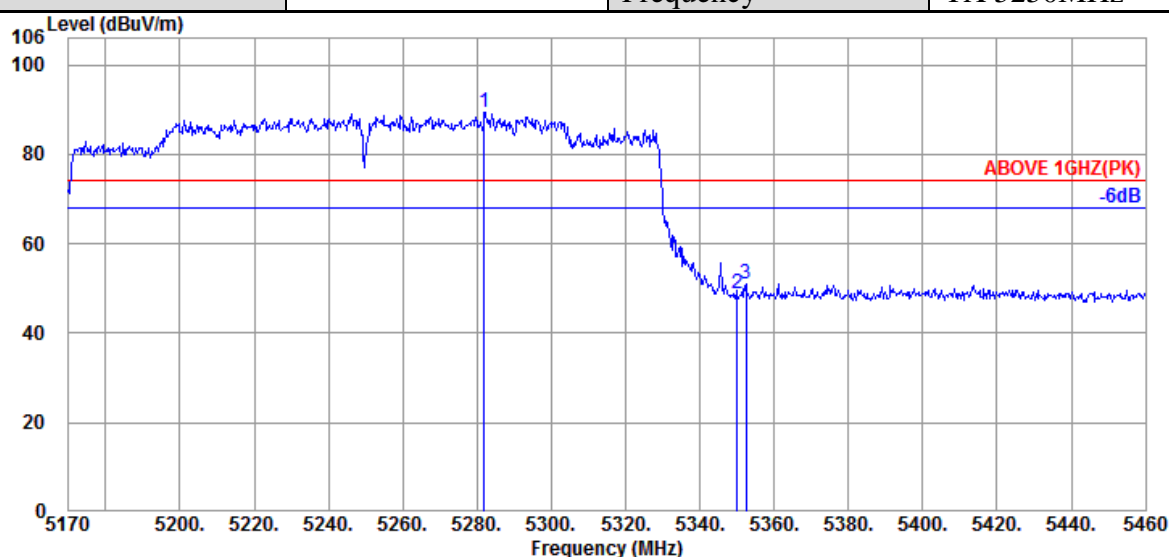

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5281.940	34.57	10.79	34.34	78.16	89.18	---	---	Peak
5350.090	34.60	10.83	34.31	37.55	48.67	74.00	21.31	Peak
5352.410	34.60	10.83	34.31	40.02	51.14	74.00	18.05	Peak

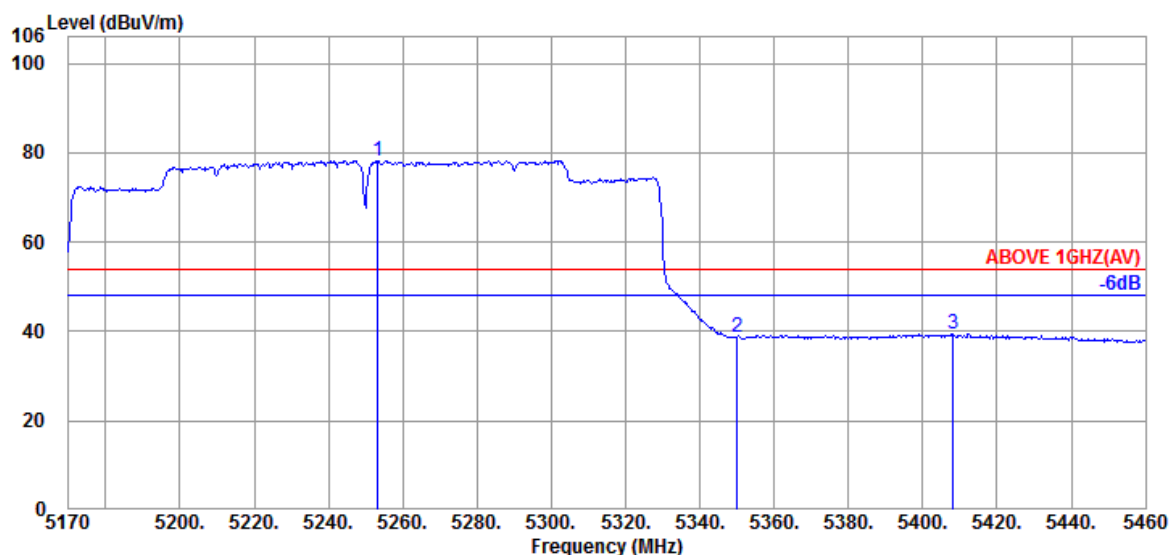

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5253.230	34.50	10.76	34.35	67.30	78.21	---	---	Average
5350.090	34.60	10.83	34.31	27.42	38.54	54.00	10.81	Average
5408.090	34.62	10.87	34.30	28.25	39.44	54.00	10.09	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	Band	NII-2C
		Frequency	TX 5570MHz

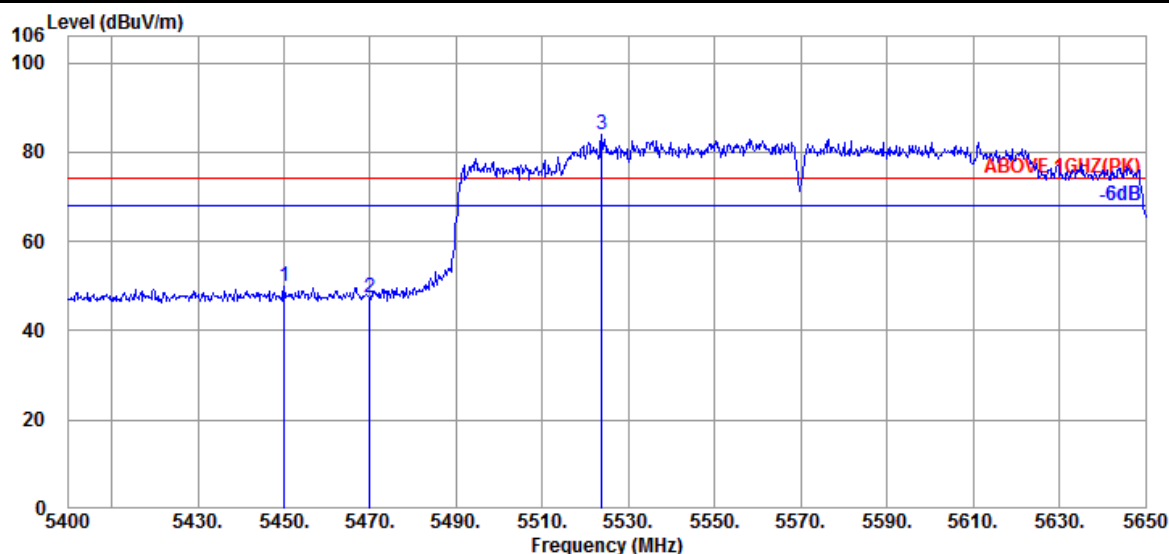

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.000	34.70	10.89	34.29	38.47	49.77	74.00	18.58	Peak
5470.000	34.67	10.91	34.28	36.11	47.41	74.00	21.05	Peak
@ 5523.750	34.60	10.93	34.29	72.57	83.81	---	---	Peak

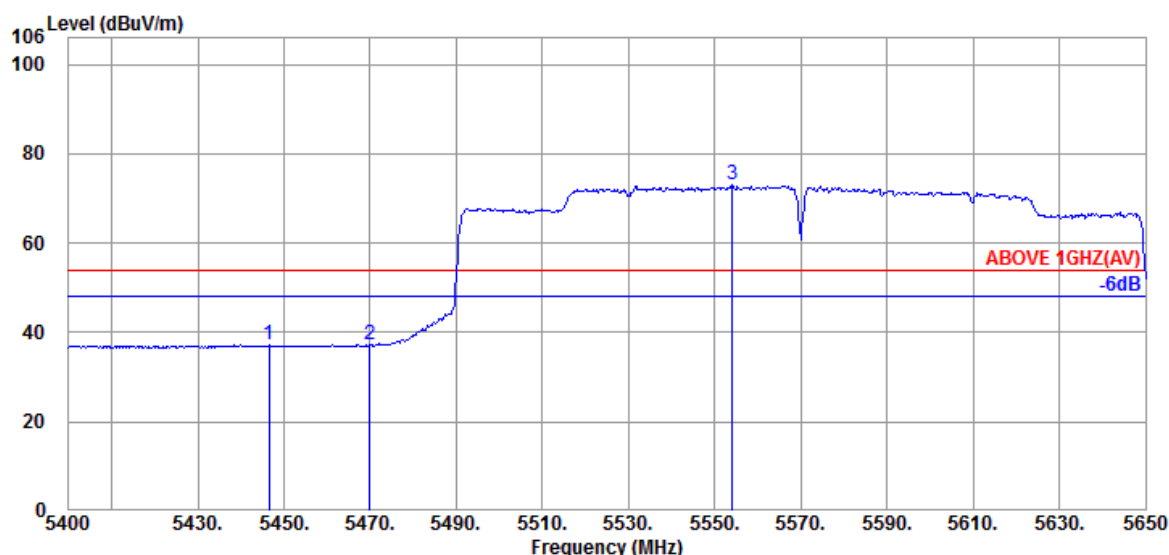


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5446.500	34.67	10.89	34.29	25.91	37.18	54.00	10.29	Average
5470.000	34.67	10.91	34.28	26.02	37.32	54.00	10.39	Average
@ 5554.000	34.60	10.95	34.30	61.66	72.91	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	Band	NII-2C
		Frequency	TX 5570MHz

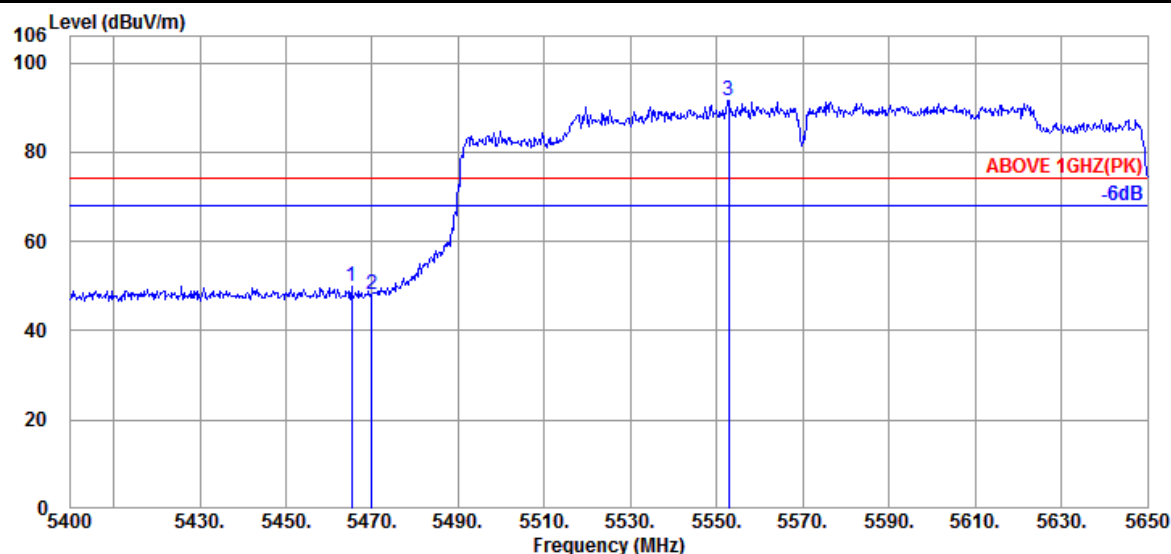

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.250	34.67	10.91	34.28	38.58	49.88	74.00	18.29	Peak
5470.000	34.67	10.91	34.28	36.78	48.08	74.00	20.95	Peak
@ 5552.750	34.60	10.95	34.30	80.24	91.49	---	---	Peak

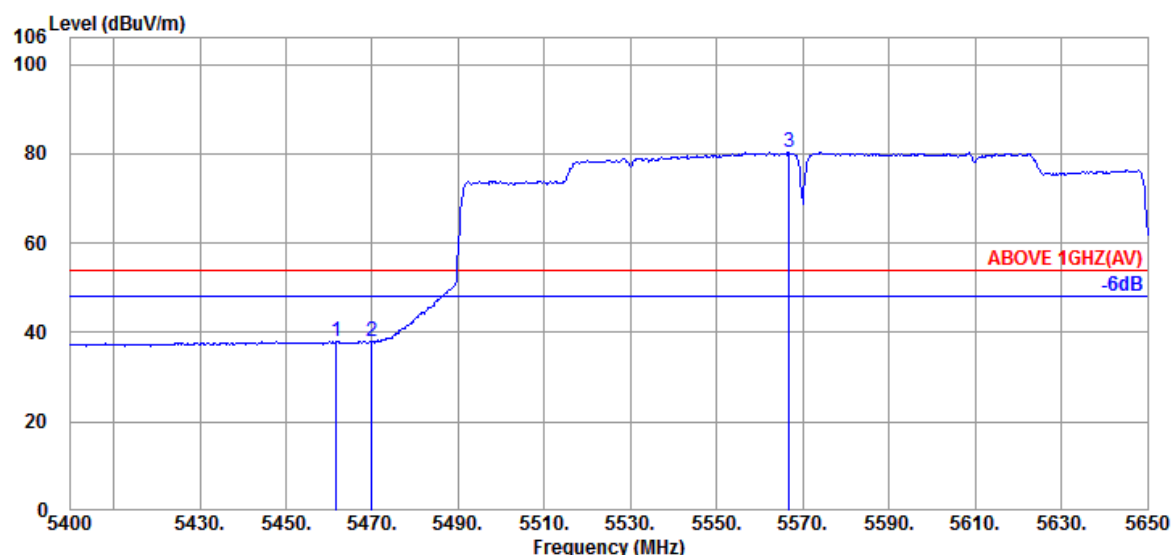

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.750	34.70	10.91	34.28	26.73	38.06	54.00	10.15	Average
5470.000	34.67	10.91	34.28	26.55	37.85	54.00	10.37	Average
@ 5566.750	34.60	10.97	34.30	68.99	80.26	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	Band	NII-2C
		Frequency	TX 5570MHz

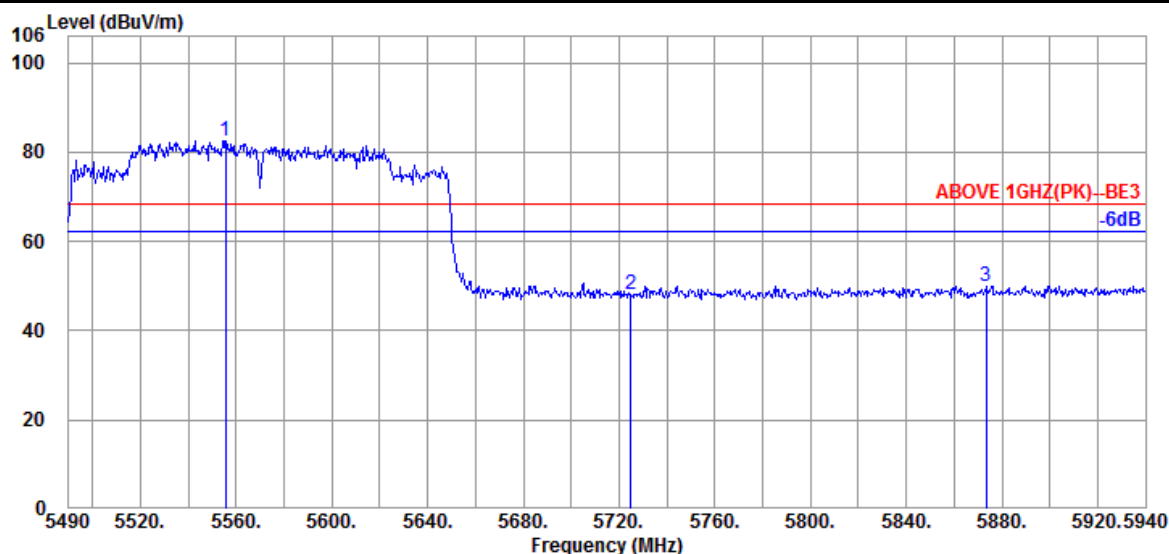

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5555.700	34.60	10.95	34.30	71.30	82.55	---	---	Peak
	5724.900	34.80	11.05	34.37	36.71	48.19	68.20	15.60	Peak
	5873.400	35.40	11.12	34.44	38.02	50.10	68.20	11.92	Peak

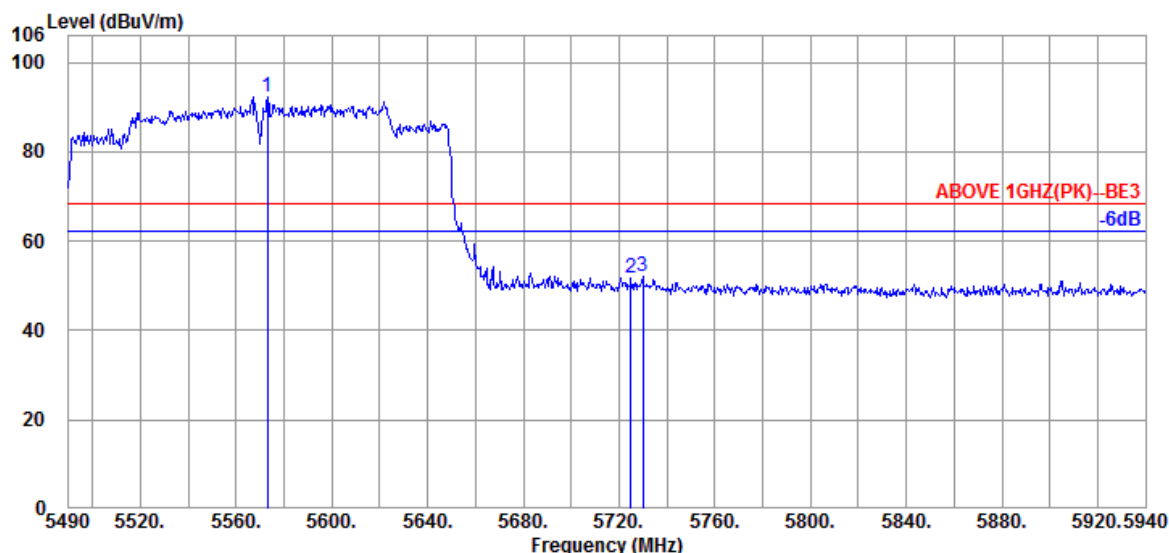

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5573.250	34.60	10.97	34.30	81.15	92.42	---	---	Peak
	5724.900	34.80	11.05	34.37	40.42	51.90	68.20	14.12	Peak
	5729.850	34.80	11.05	34.38	40.78	52.25	68.20	11.89	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Band	NII-I
RU Configuration	26/0	Frequency	TX 5180MHz

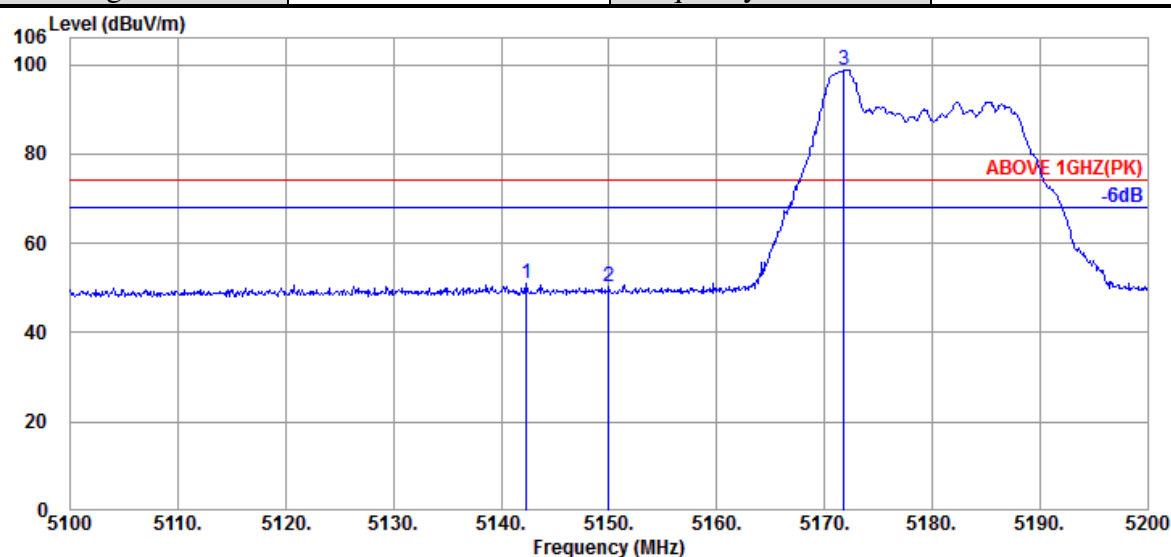

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.300	34.40	10.70	34.38	40.14	50.86	74.00	25.51	Peak
5150.000	34.40	10.70	34.38	39.41	50.13	74.00	26.77	Peak
@ 5171.800	34.47	10.72	34.37	87.88	98.70	---	---	Peak

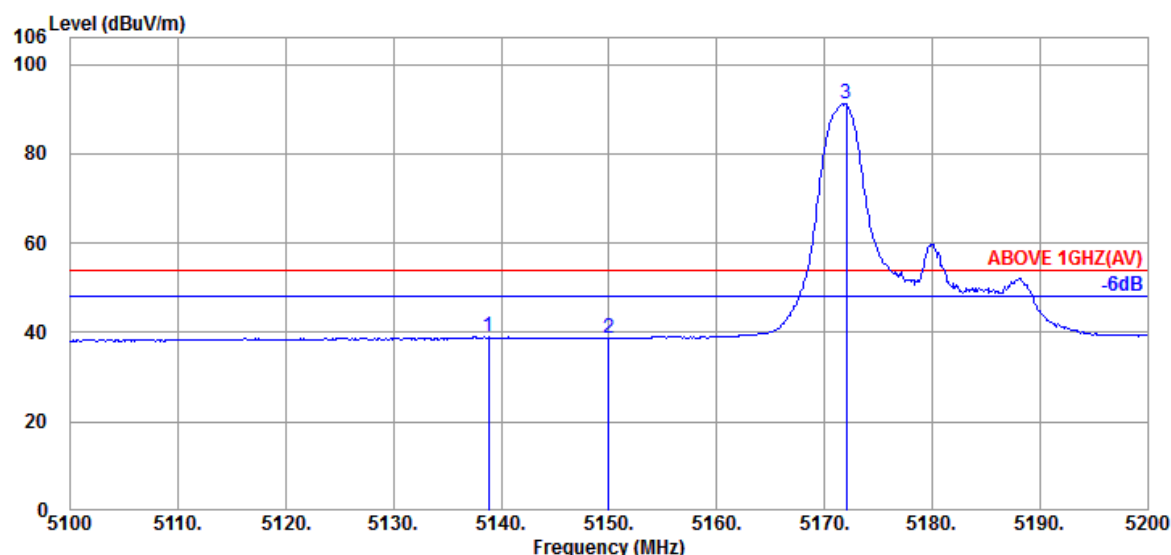

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5138.800	34.37	10.70	34.39	28.31	38.99	54.00	16.91	Average
5150.000	34.40	10.70	34.38	28.08	38.80	54.00	17.20	Average
@ 5172.000	34.47	10.72	34.37	80.23	91.05	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM2010181


Report Number: EM-F200514

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Band	NII-I
RU Configuration	26/0	Frequency	TX 5180MHz

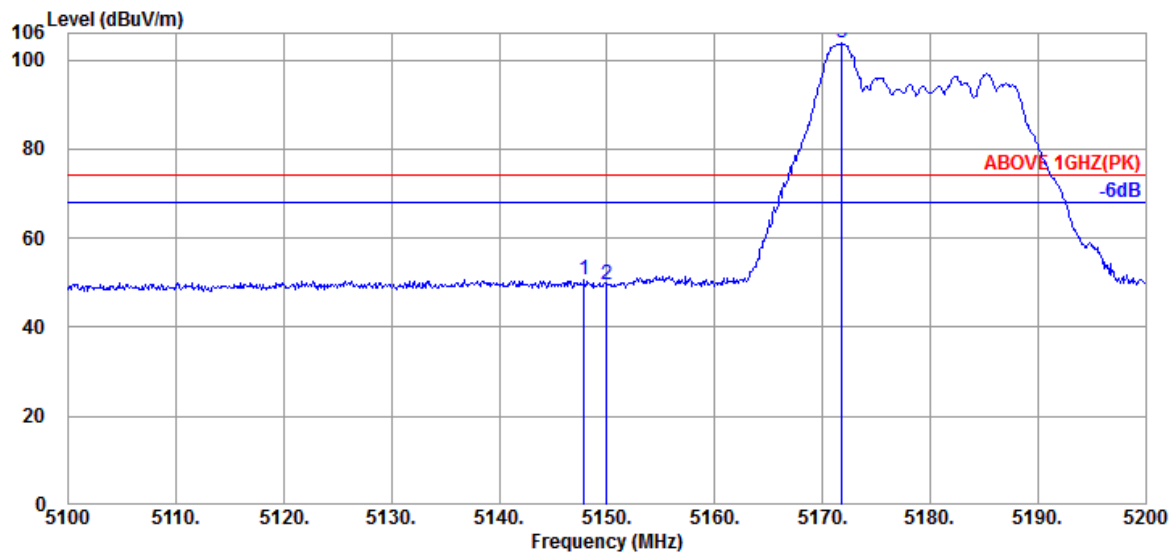

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.900	34.40	10.70	34.38	39.92	50.64	74.00	24.60	Peak
5150.000	34.40	10.70	34.38	38.80	49.52	74.00	26.61	Peak
@ 5171.800	34.47	10.72	34.37	92.86	103.68	---	---	Peak

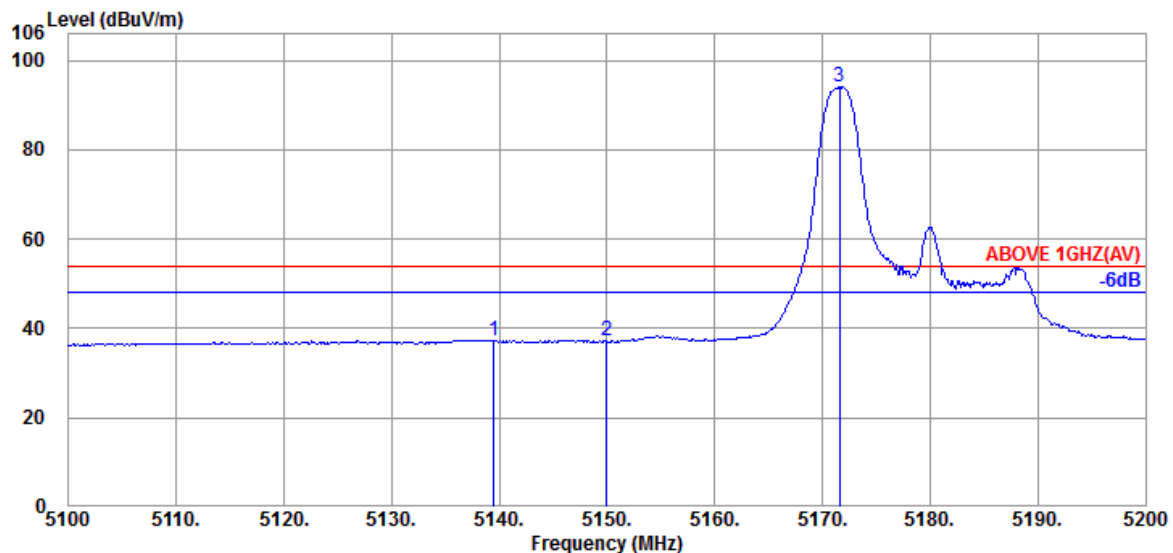

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5139.500	34.37	10.70	34.38	26.71	37.40	54.00	16.62	Average
5150.000	34.40	10.70	34.38	26.44	37.16	54.00	16.92	Average
@ 5171.600	34.47	10.72	34.37	83.18	94.00	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM2010181

Report Number: EM-F200514

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Band	NII-I
RU Configuration	52/37	Frequency	TX 5180MHz

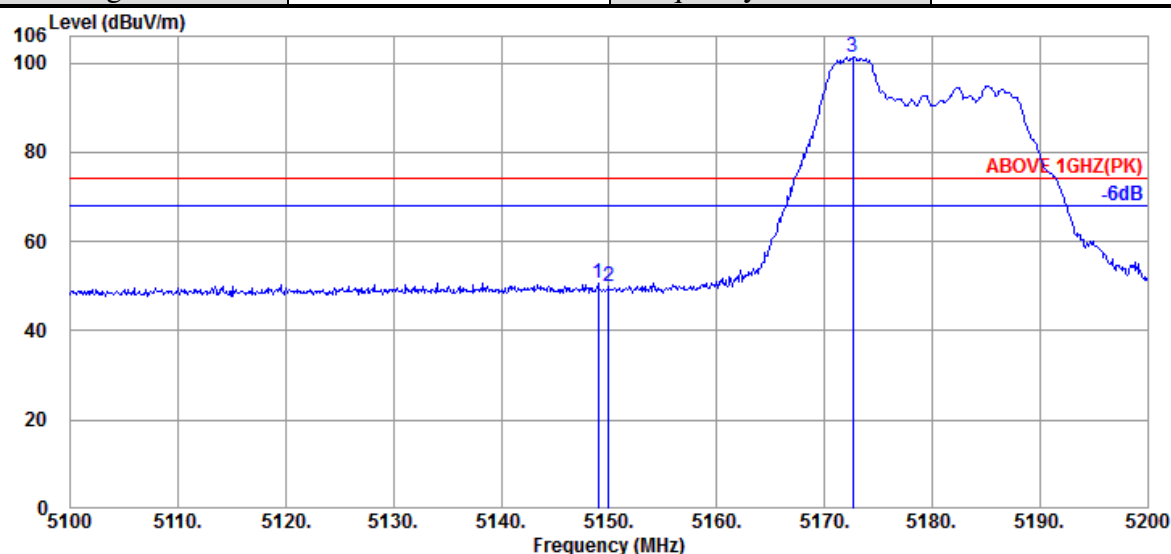

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.000	34.40	10.70	34.38	40.06	50.78	74.00	25.26	Peak
5150.000	34.40	10.70	34.38	39.27	49.99	74.00	27.23	Peak
@ 5172.600	34.47	10.72	34.37	90.54	101.36	---	---	Peak

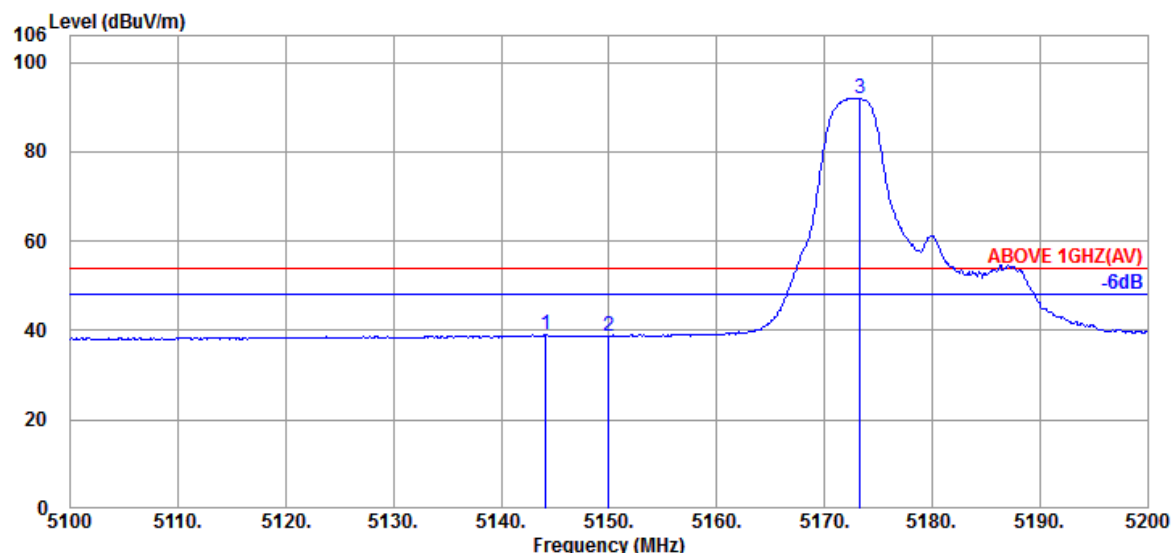

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.100	34.40	10.70	34.38	28.27	38.99	54.00	16.91	Average
5150.000	34.40	10.70	34.38	27.92	38.64	54.00	17.36	Average
@ 5173.300	34.47	10.72	34.37	81.10	91.92	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM2010181

Report Number: EM-F200514

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Band	NII-I
RU Configuration	52/37	Frequency	TX 5180MHz

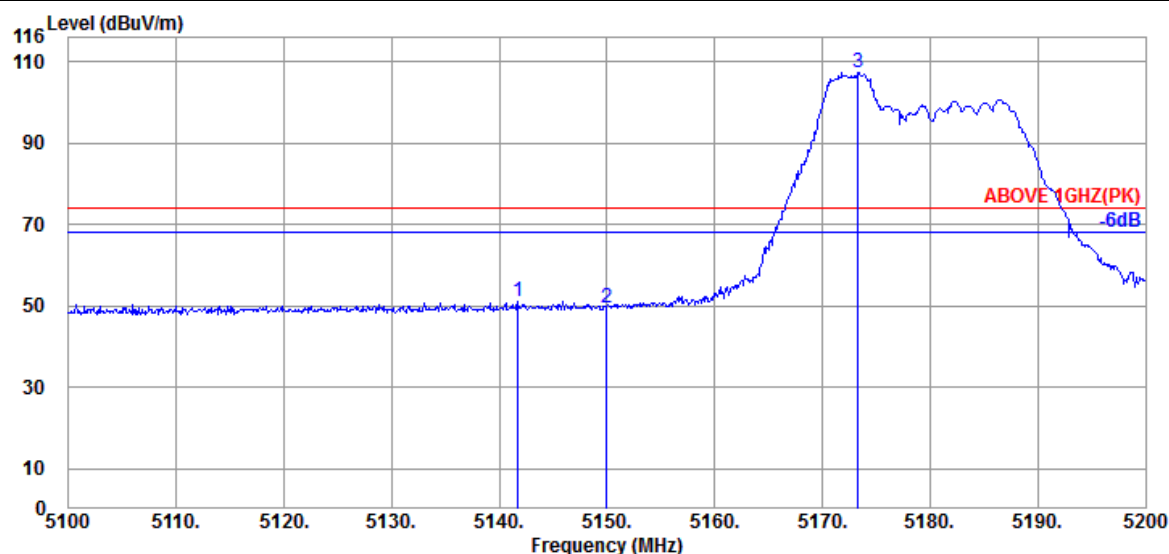

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.700	34.37	10.70	34.38	40.52	51.21	74.00	24.59	Peak
5150.000	34.40	10.70	34.38	38.95	49.67	74.00	26.83	Peak
@ 5173.300	34.47	10.72	34.37	96.38	107.20	---	---	Peak

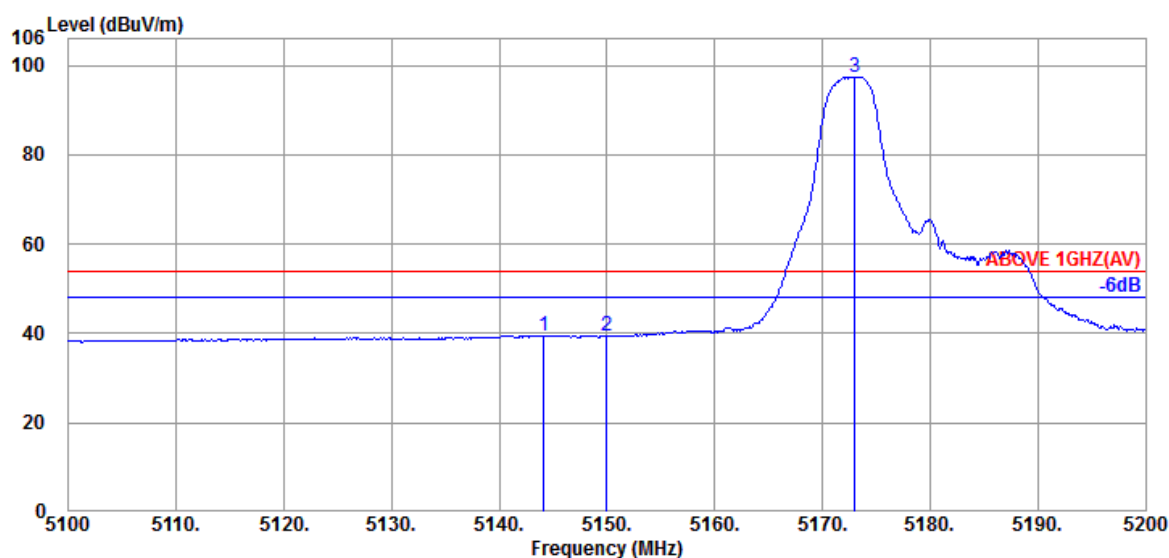

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.100	34.40	10.70	34.38	28.86	39.58	54.00	16.42	Average
5150.000	34.40	10.70	34.38	28.66	39.38	54.00	16.76	Average
@ 5173.000	34.47	10.72	34.37	86.59	97.41	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM2010181

Report Number: EM-F200514


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ax-HE20	Band	NII-I
RU Configuration	106/53	Frequency	TX 5180MHz

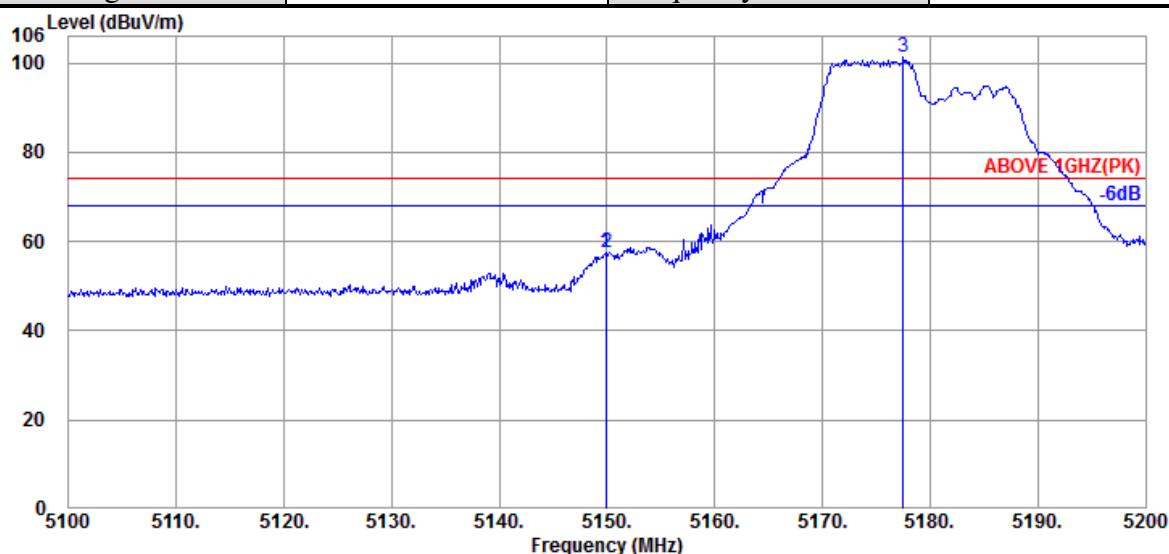

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.900	34.40	10.70	34.38	46.66	57.38	74.00	25.05	Peak
5150.000	34.40	10.70	34.38	46.65	57.37	74.00	27.22	Peak
@ 5177.500	34.47	10.72	34.37	90.32	101.14	---	---	Peak

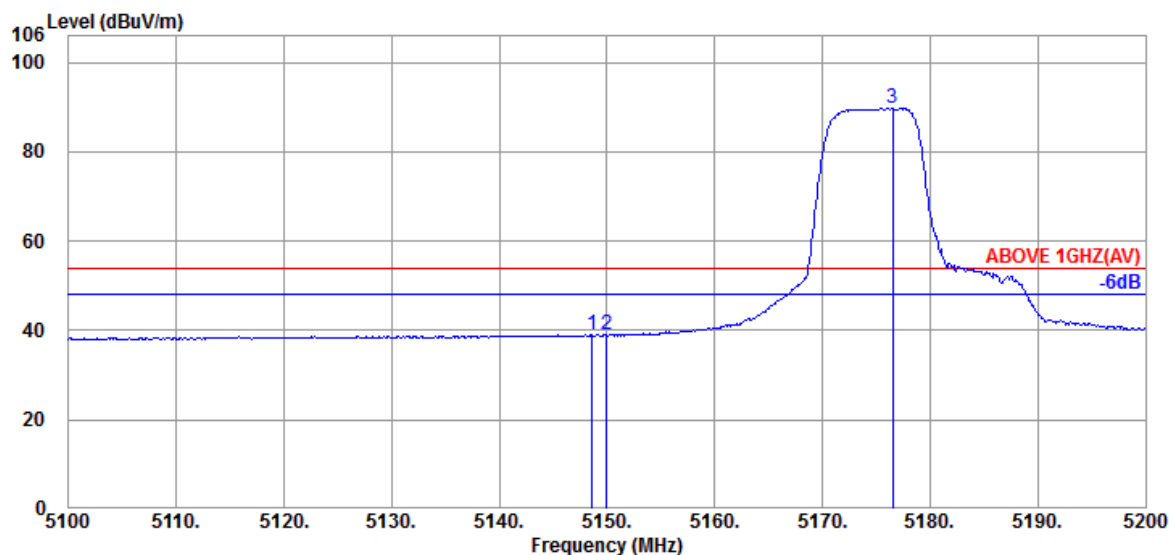


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.600	34.40	10.70	34.38	28.22	38.94	54.00	16.99	Average
5150.000	34.40	10.70	34.38	28.18	38.90	54.00	17.19	Average
@ 5176.500	34.47	10.72	34.37	78.94	89.76	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-I
RU Configuration	106/53	Frequency	TX 5180MHz

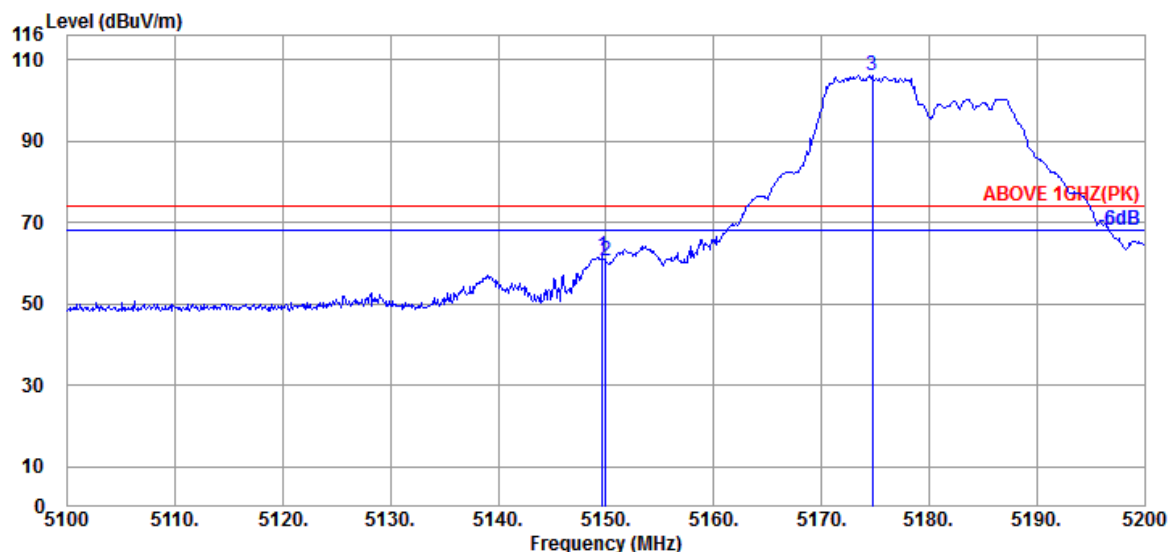

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.700	34.40	10.70	34.38	50.92	61.64	74.00	21.74	Peak
5150.000	34.40	10.70	34.38	49.84	60.56	74.00	27.28	Peak
@ 5174.700	34.47	10.72	34.37	95.42	106.24	---	---	Peak

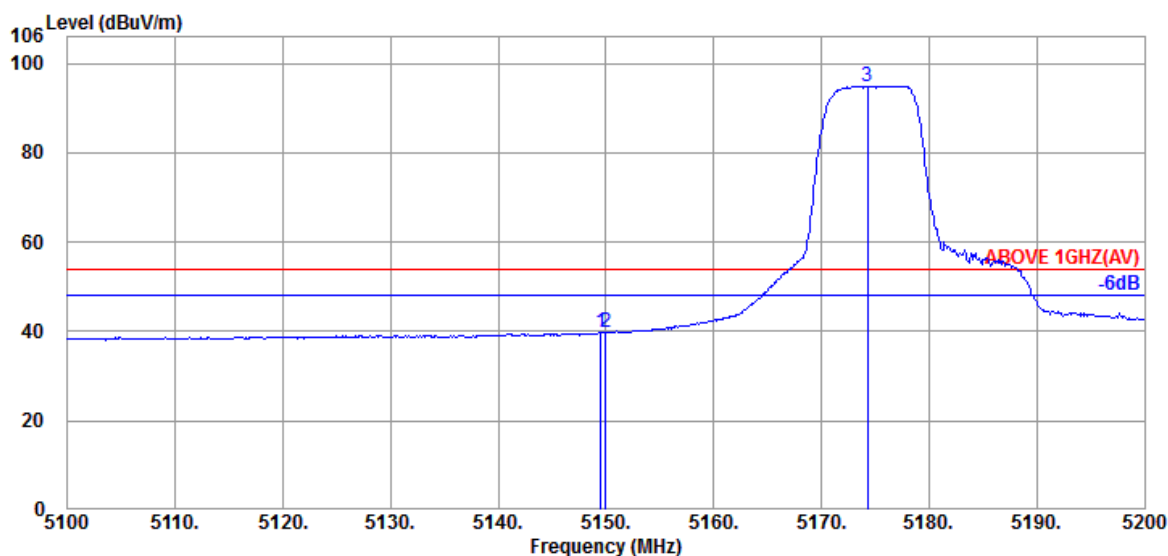

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	34.40	10.70	34.38	29.08	39.80	54.00	16.45	Average
5150.000	34.40	10.70	34.38	28.98	39.70	54.00	16.48	Average
@ 5174.300	34.47	10.72	34.37	84.09	94.91	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Band	NII-2A
RU Configuration	26/8	Frequency	TX 5320MHz

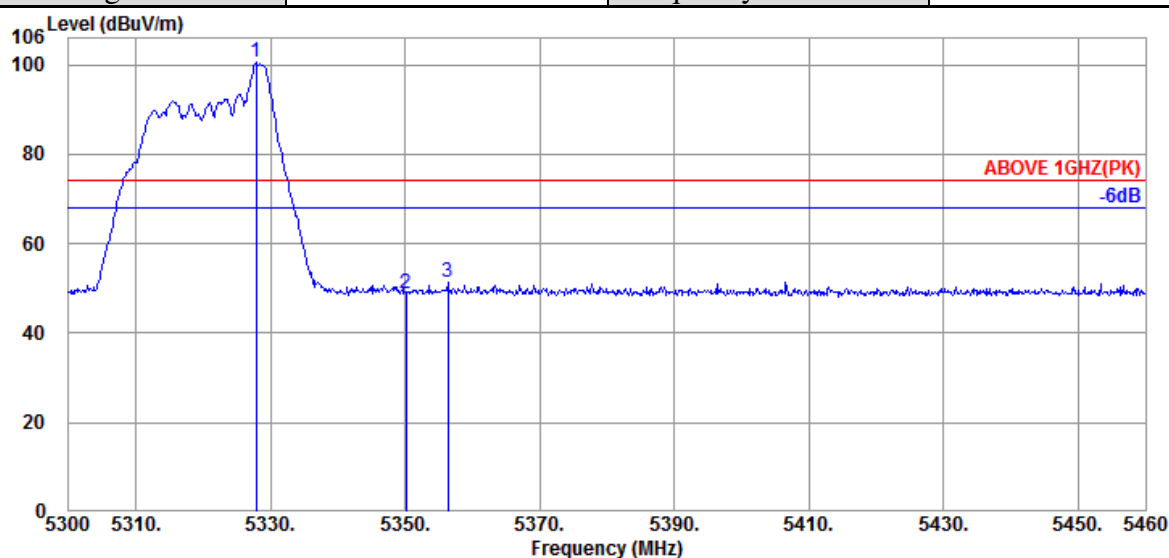

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.840	34.60	10.83	34.33	89.30	100.40	---	---	Peak
5350.080	34.60	10.83	34.31	37.58	48.70	74.00	26.53	Peak
5356.320	34.60	10.85	34.31	40.06	51.20	74.00	24.84	Peak

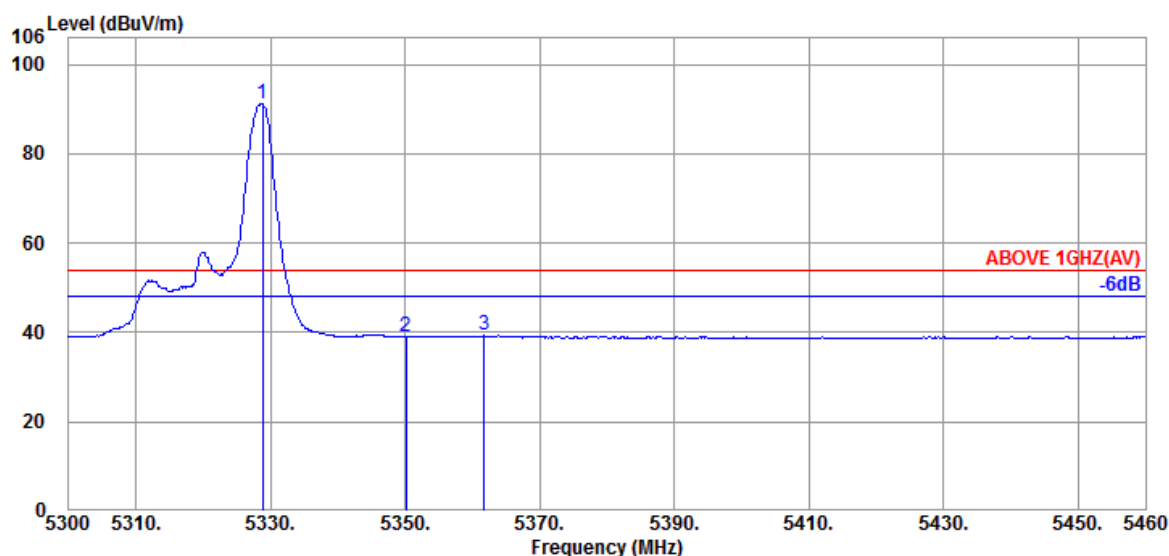

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.800	34.60	10.83	34.32	80.04	91.15	---	---	Average
5350.080	34.60	10.83	34.31	27.91	39.03	54.00	17.12	Average
5361.760	34.60	10.85	34.31	28.14	39.28	54.00	16.43	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM2010181

Report Number: EM-F200514


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ax-HE20	Band	NII-2A
RU Configuration	26/8	Frequency	TX 5320MHz

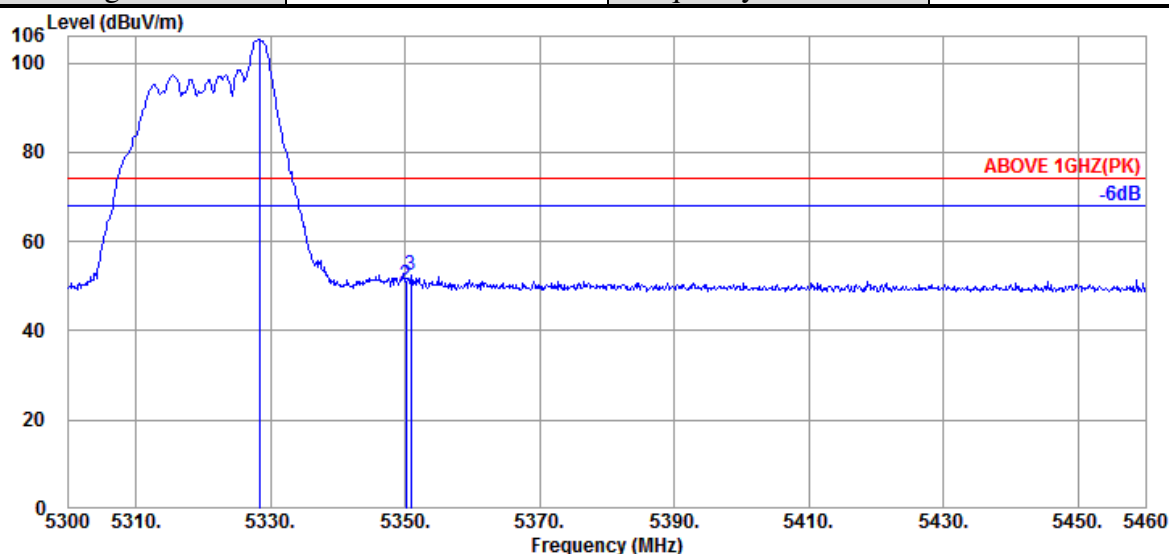

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5328.320	34.60	10.83	34.32	94.24	105.35	---	---	Peak
	5350.080	34.60	10.83	34.31	39.07	50.19	74.00	25.80	Peak
	5350.880	34.60	10.83	34.31	41.20	52.32	74.00	24.27	Peak

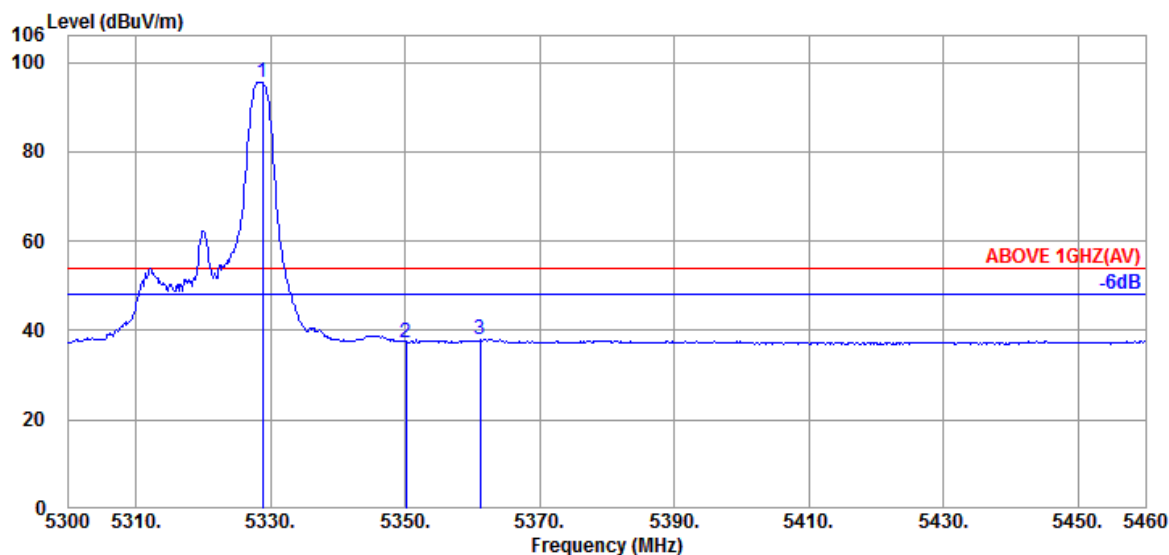

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5328.800	34.60	10.83	34.32	84.51	95.62	---	---	Average
	5350.080	34.60	10.83	34.31	26.30	37.42	54.00	15.99	Average
	5361.120	34.60	10.85	34.31	26.90	38.04	54.00	15.76	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Band	NII-2A
RU Configuration	52/40	Frequency	TX 5320MHz

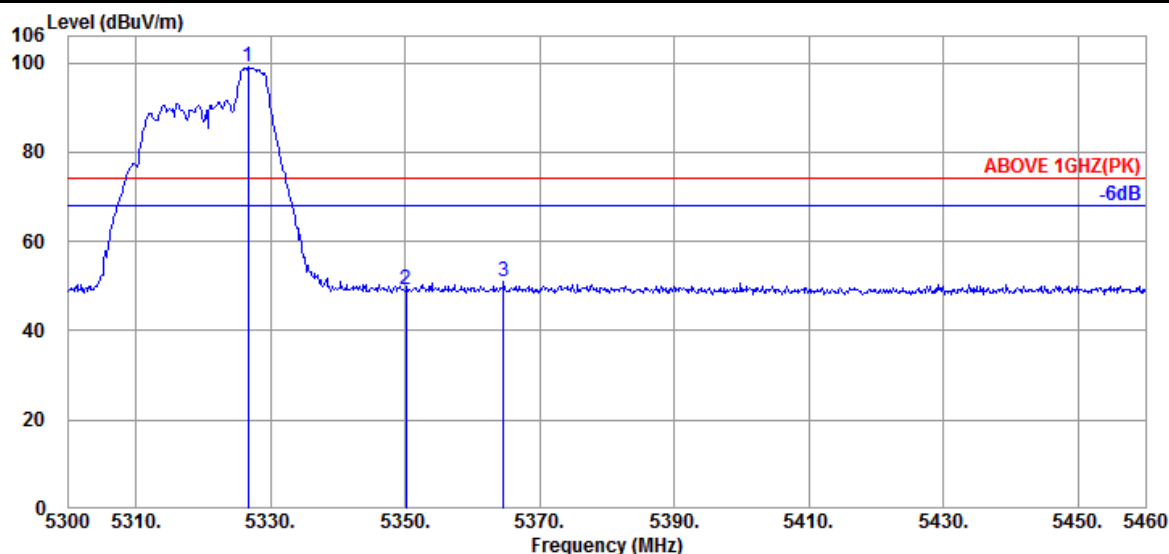

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.720	34.60	10.83	34.33	88.20	99.30	---	---	Peak
5350.080	34.60	10.83	34.31	38.07	49.19	74.00	27.35	Peak
5364.640	34.60	10.85	34.31	39.70	50.84	74.00	24.65	Peak

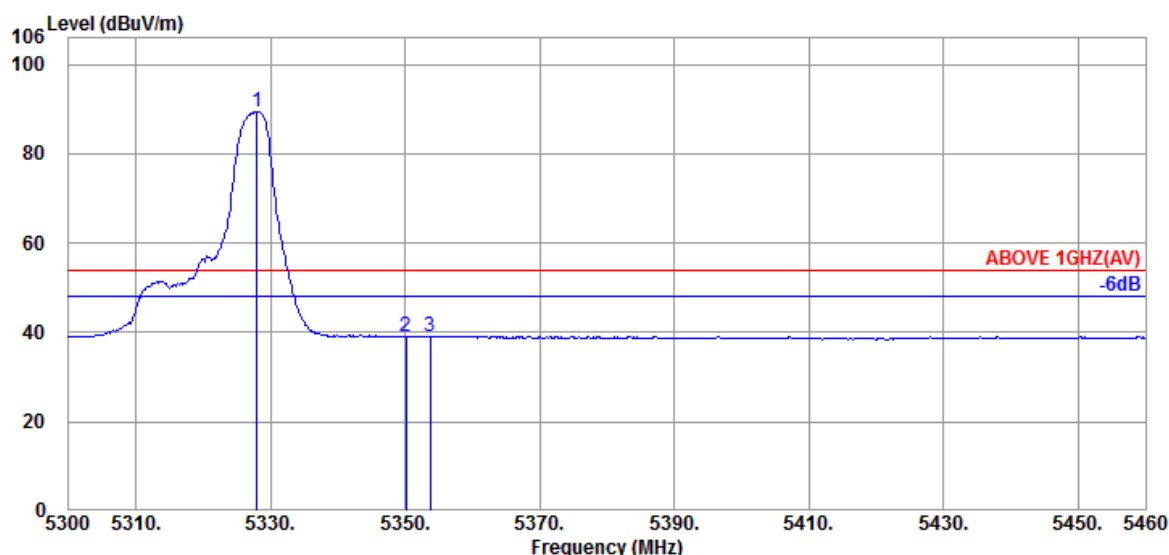

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.000	34.60	10.83	34.33	78.32	89.42	---	---	Average
5350.080	34.60	10.83	34.31	27.81	38.93	54.00	17.12	Average
5353.760	34.60	10.83	34.31	28.12	39.24	54.00	16.43	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM2010181

Report Number: EM-F200514


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ax-HE20	Band	NII-2A
RU Configuration	52/40	Frequency	TX 5320MHz

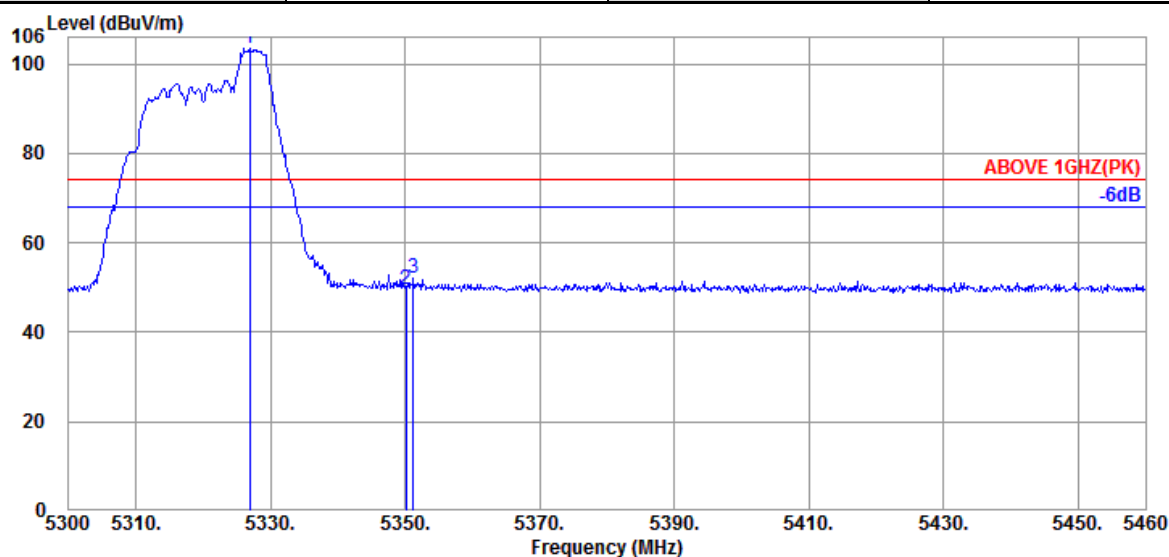

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5326.880	34.60	10.83	34.33	92.34	103.44	---	---	Peak
	5350.080	34.60	10.83	34.31	38.32	49.44	74.00	26.53	Peak
	5351.200	34.60	10.83	34.31	40.84	51.96	74.00	24.46	Peak

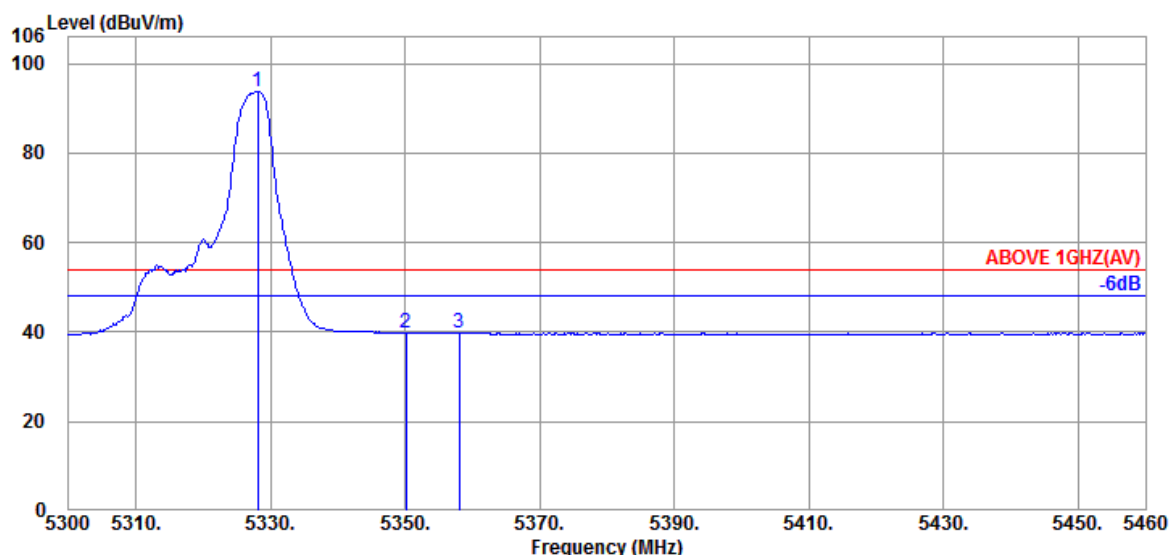


Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5328.160	34.60	10.83	34.32	82.56	93.67	---	---	Average
	5350.080	34.60	10.83	34.31	28.59	39.71	54.00	15.99	Average
	5358.080	34.60	10.85	34.31	28.82	39.96	54.00	15.90	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2A
RU Configuration	106/54	Frequency	TX 5320MHz

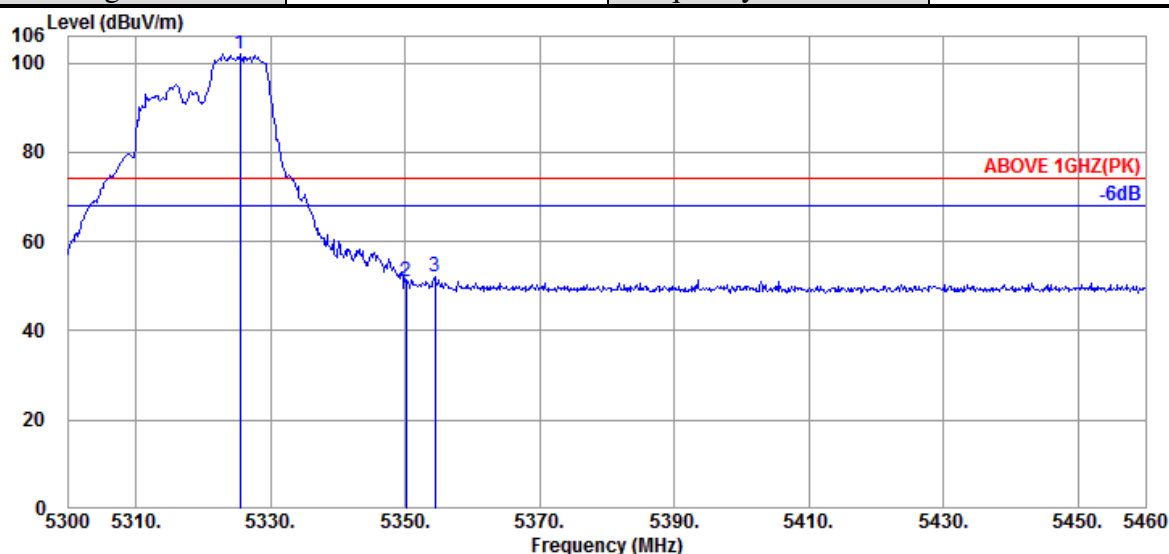

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5325.440	34.60	10.83	34.33	91.08	102.18	---	---	Peak
	5350.080	34.60	10.83	34.31	39.84	50.96	74.00	27.86	Peak
	5354.400	34.60	10.83	34.31	41.04	52.16	74.00	24.58	Peak

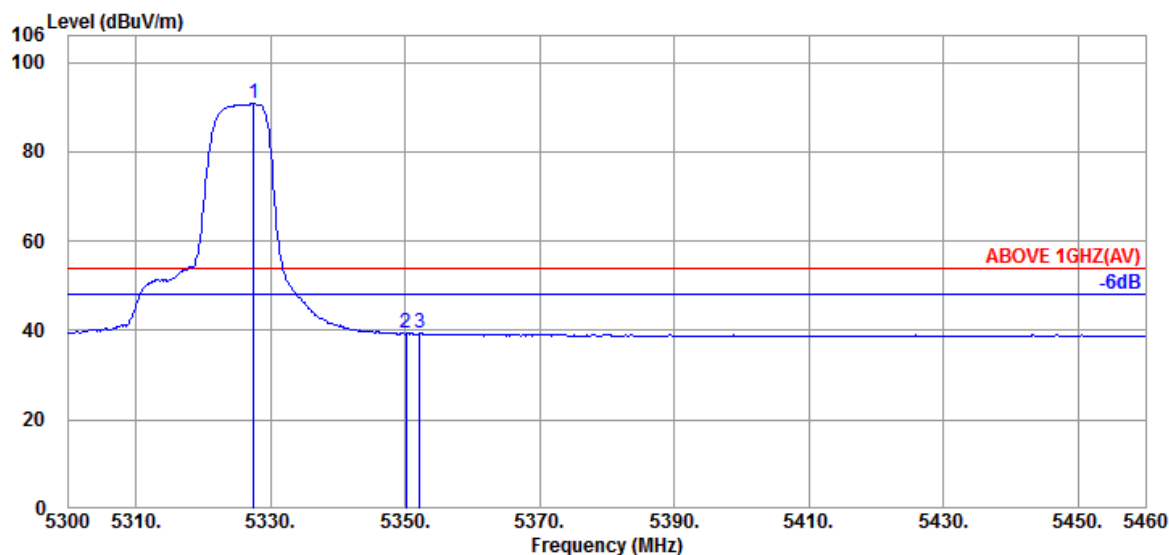


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5327.520	34.60	10.83	34.33	79.64	90.74	---	---	Average
	5350.080	34.60	10.83	34.31	28.18	39.30	54.00	17.26	Average
	5352.160	34.60	10.83	34.31	28.23	39.35	54.00	16.52	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2A
RU Configuration	106/54	Frequency	TX 5320MHz

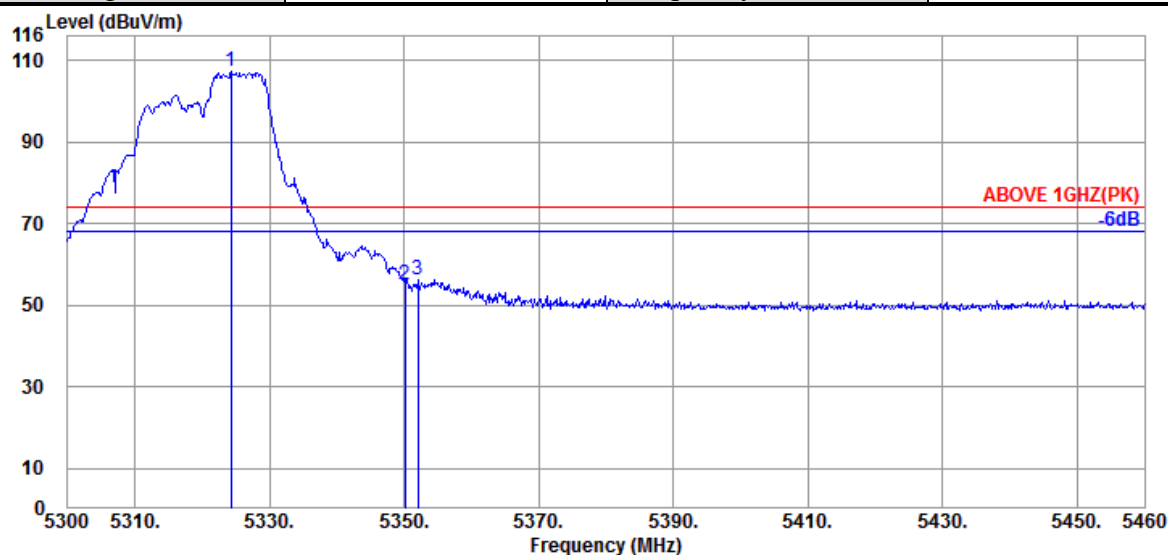

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.320	34.60	10.83	34.33	96.22	107.32	---	---	Peak
5350.080	34.60	10.83	34.31	43.83	54.95	74.00	25.86	Peak
5352.000	34.60	10.83	34.31	45.26	56.38	74.00	24.07	Peak

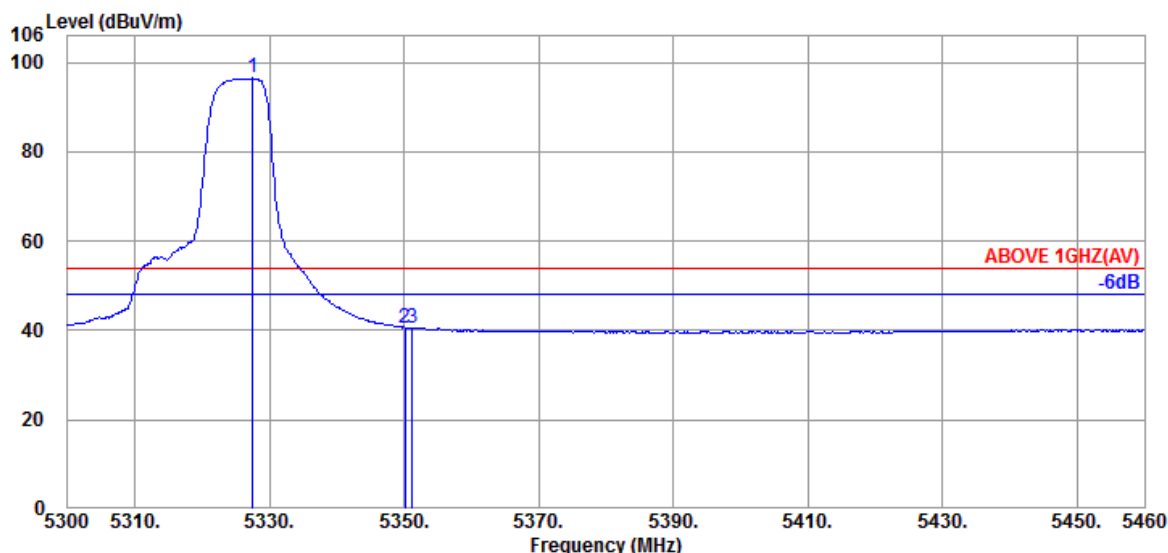


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.520	34.60	10.83	34.33	85.42	96.52	---	---	Average
5350.080	34.60	10.83	34.31	29.50	40.62	54.00	15.77	Average
5351.200	34.60	10.83	34.31	29.48	40.60	54.00	15.65	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Band	NII-2C
RU Configuration	26/0	Frequency	TX 5500MHz

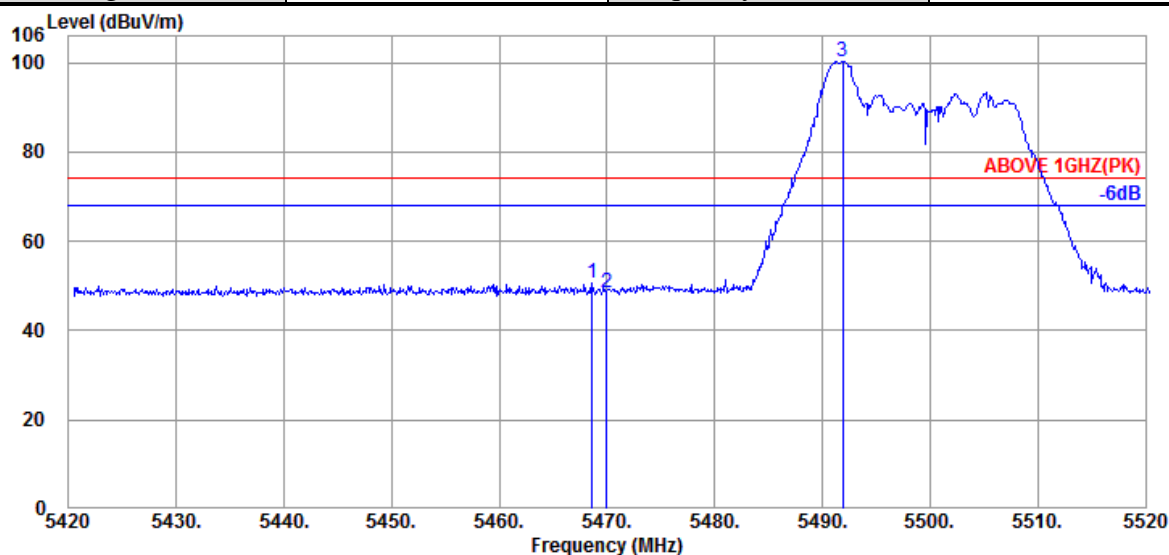

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.600	34.67	10.91	34.28	39.42	50.72	74.00	24.61	Peak
5470.000	34.67	10.91	34.28	37.25	48.55	74.00	27.22	Peak
@ 5491.900	34.63	10.91	34.27	88.97	100.24	---	---	Peak

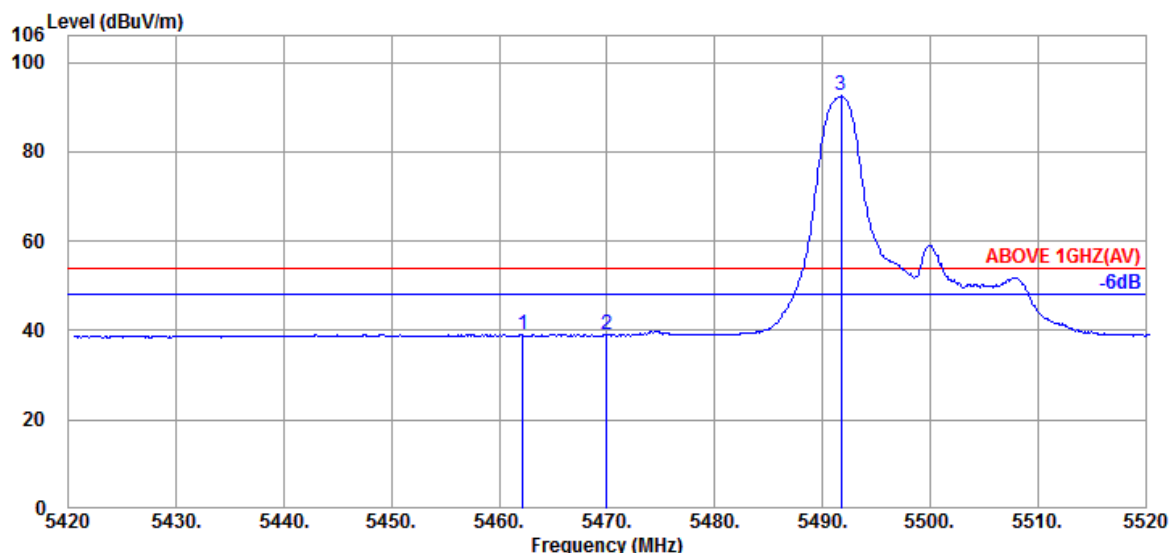

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5462.200	34.70	10.91	34.28	27.84	39.17	54.00	16.39	Average
5470.000	34.67	10.91	34.28	27.73	39.03	54.00	16.78	Average
@ 5491.700	34.63	10.91	34.27	81.19	92.46	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Band	NII-2C
RU Configuration	26/0	Frequency	TX 5500MHz

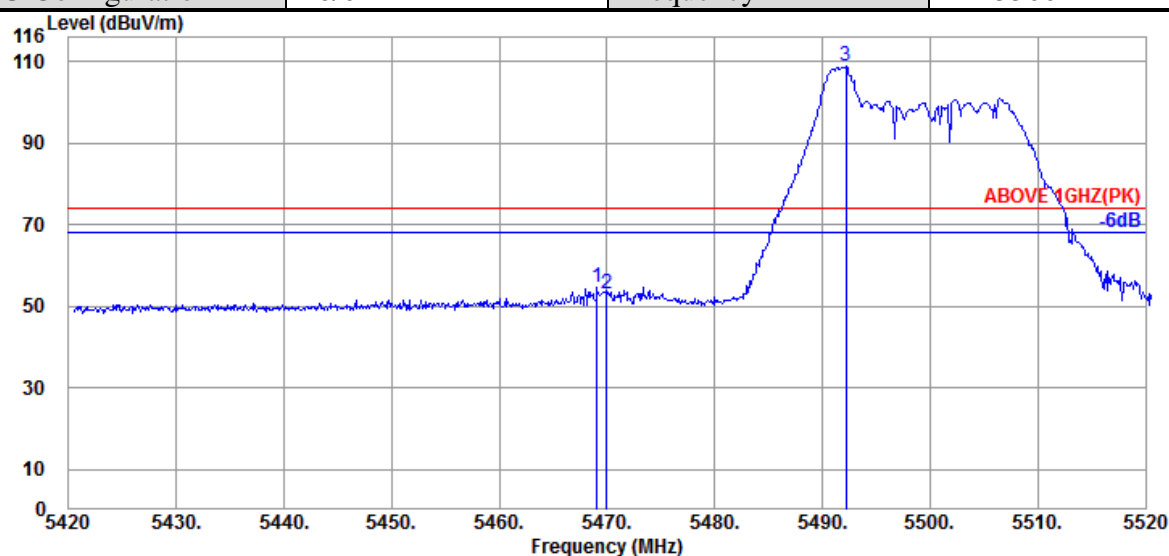

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.100	34.67	10.91	34.28	43.46	54.76	74.00	24.73	Peak
5470.000	34.67	10.91	34.28	41.84	53.14	74.00	26.56	Peak
@ 5492.200	34.63	10.91	34.27	97.61	108.88	---	---	Peak

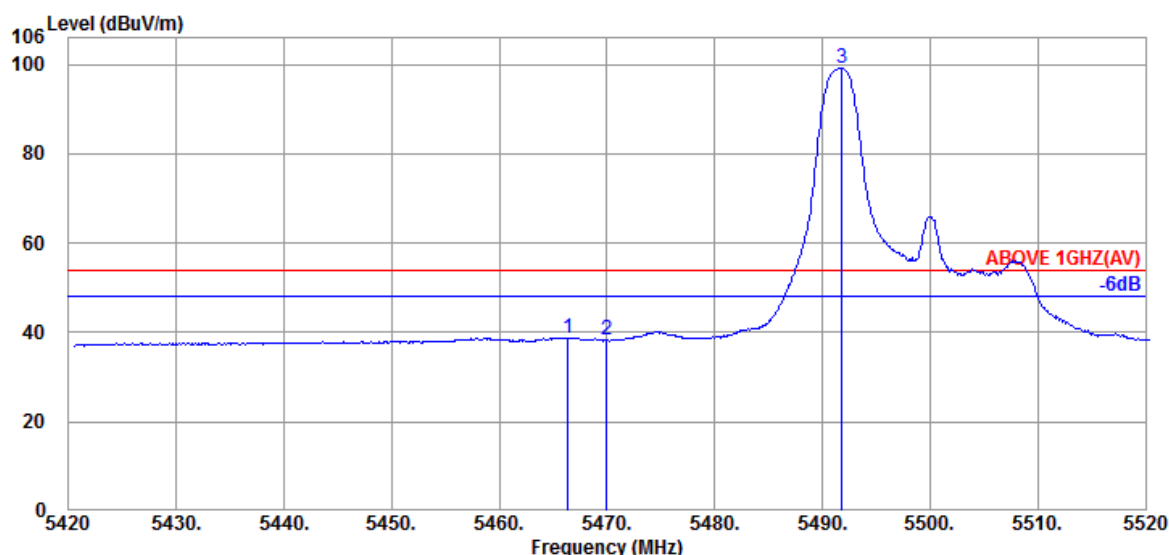

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.400	34.67	10.91	34.28	27.53	38.83	54.00	15.74	Average
5470.000	34.67	10.91	34.28	26.89	38.19	54.00	16.20	Average
@ 5491.800	34.63	10.91	34.27	87.87	99.14	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section..

File Number: CIM2010181

Report Number: EM-F200514

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Band	NII-2C
RU Configuration	52/37	Frequency	TX 5500MHz

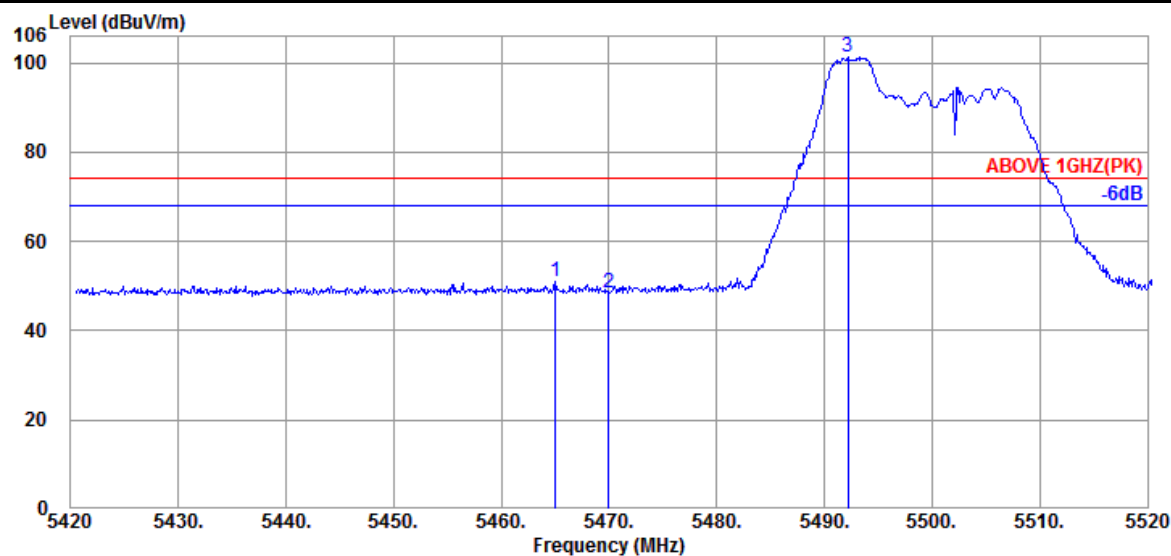

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5465.000	34.67	10.91	34.28	39.64	50.94	74.00	24.21	Peak
5470.000	34.67	10.91	34.28	37.28	48.58	74.00	26.91	Peak
@ 5492.200	34.63	10.91	34.27	90.17	101.44	---	---	Peak

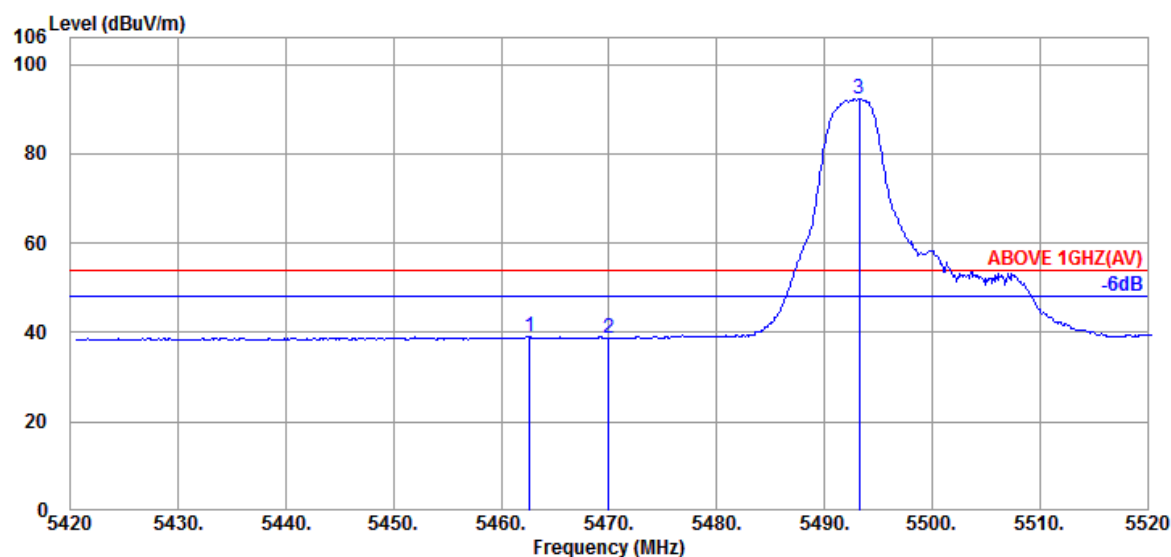

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5462.600	34.70	10.91	34.28	27.78	39.11	54.00	16.36	Average
5470.000	34.67	10.91	34.28	27.42	38.72	54.00	16.58	Average
@ 5493.200	34.63	10.91	34.27	81.01	92.28	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM2010181

Report Number: EM-F200514

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Band	NII-2C
RU Configuration	52/37	Frequency	TX 5500MHz

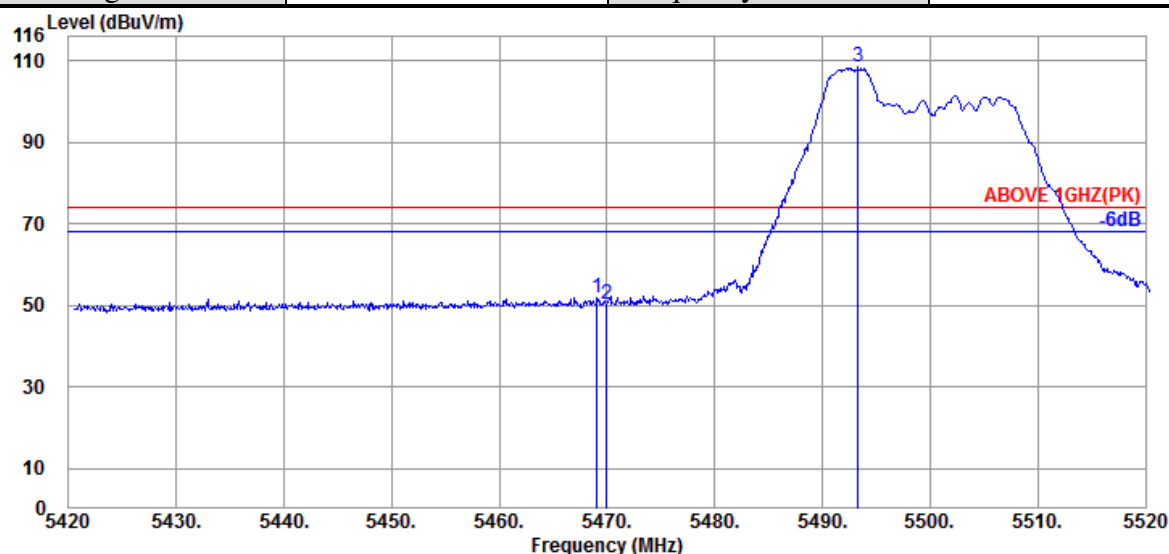

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.100	34.67	10.91	34.28	40.76	52.06	74.00	23.88	Peak
5470.000	34.67	10.91	34.28	38.78	50.08	74.00	25.89	Peak
@ 5493.300	34.63	10.91	34.27	97.17	108.44	---	---	Peak

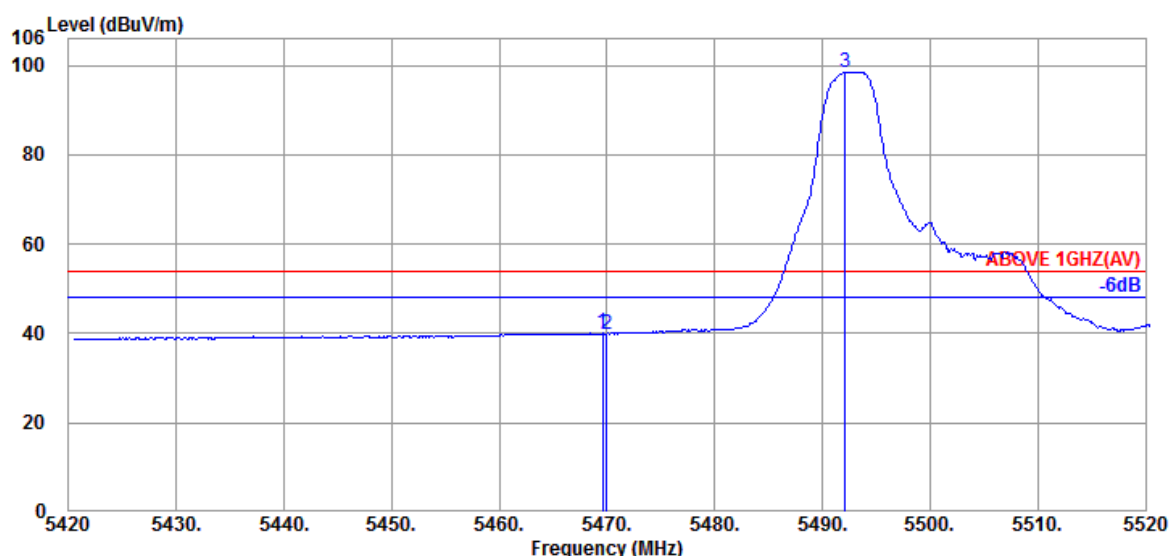

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.600	34.67	10.91	34.28	28.72	40.02	54.00	15.40	Average
5470.000	34.67	10.91	34.28	28.56	39.86	54.00	15.63	Average
@ 5492.100	34.63	10.91	34.27	87.29	98.56	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM2010181

Report Number: EM-F200514

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Band	NII-2C
RU Configuration	106/53	Frequency	TX 5500MHz

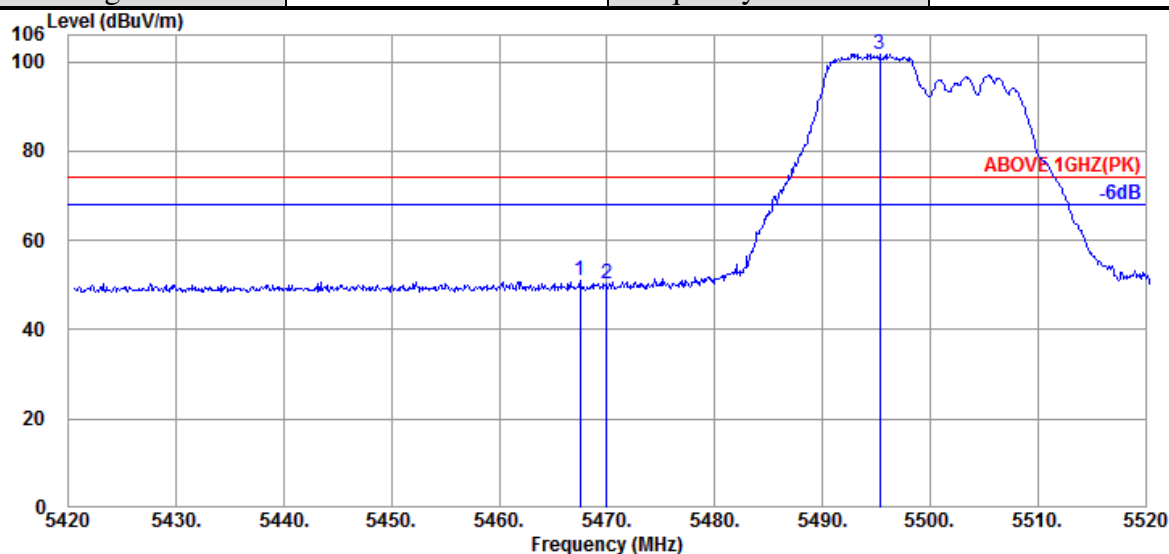

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.500	34.67	10.91	34.28	39.69	50.99	74.00	23.16	Peak
5470.000	34.67	10.91	34.28	39.13	50.43	74.00	25.69	Peak
@ 5495.300	34.60	10.93	34.27	90.52	101.78	---	---	Peak

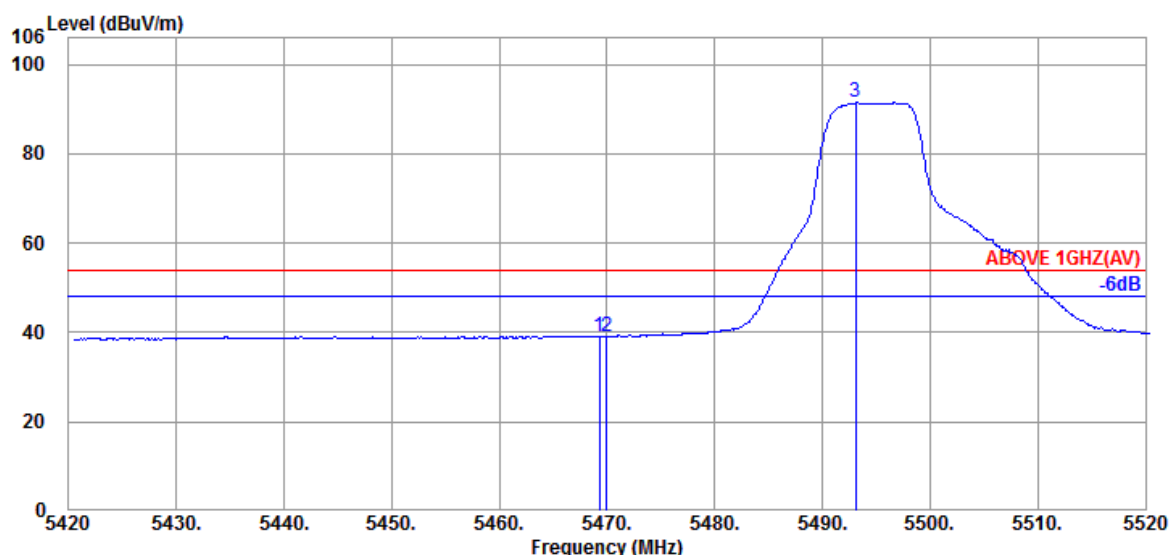

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.300	34.67	10.91	34.28	27.94	39.24	54.00	16.26	Average
5470.000	34.67	10.91	34.28	27.85	39.15	54.00	16.71	Average
@ 5493.100	34.63	10.91	34.27	80.18	91.45	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM2010181

Report Number: EM-F200514


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ax-HE20	Band	NII-2C
RU Configuration	106/53	Frequency	TX 5500MHz

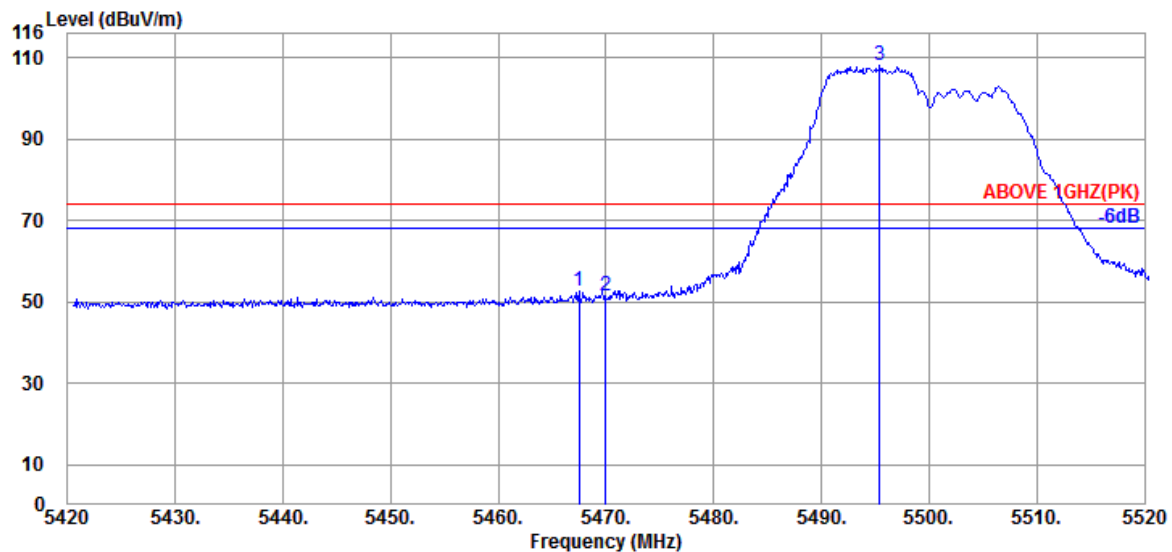

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.500	34.67	10.91	34.28	41.28	52.58	74.00	21.38	Peak
5470.000	34.67	10.91	34.28	40.26	51.56	74.00	25.25	Peak
@ 5495.400	34.60	10.93	34.27	96.69	107.95	---	---	Peak

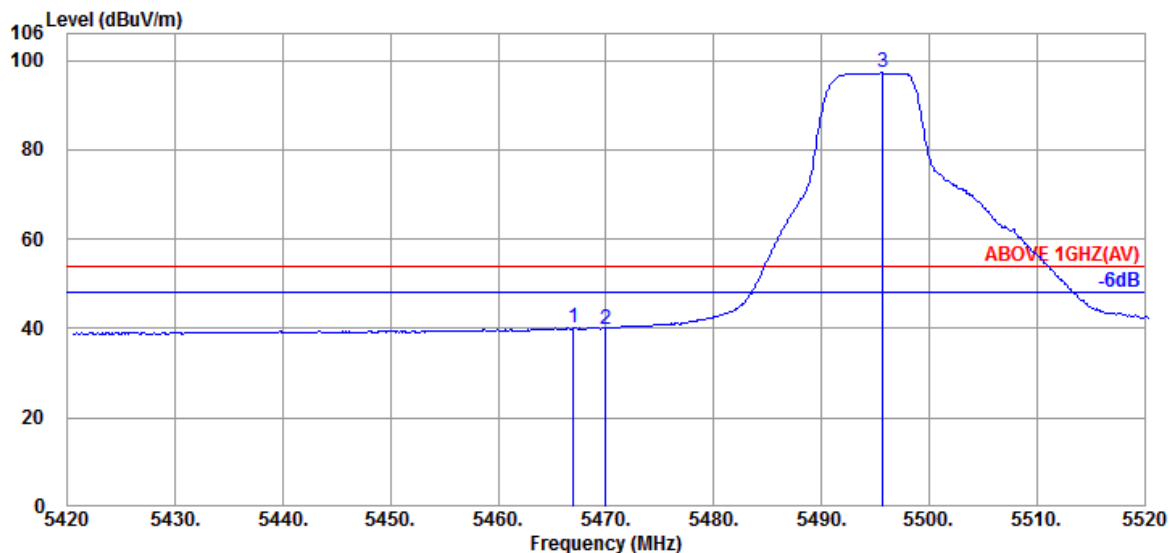

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.000	34.67	10.91	34.28	28.85	40.15	54.00	14.87	Average
5470.000	34.67	10.91	34.28	28.67	39.97	54.00	15.04	Average
@ 5495.700	34.60	10.93	34.27	85.94	97.20	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Band	NII-2C
RU Configuration	26/8	Frequency	TX 5700MHz

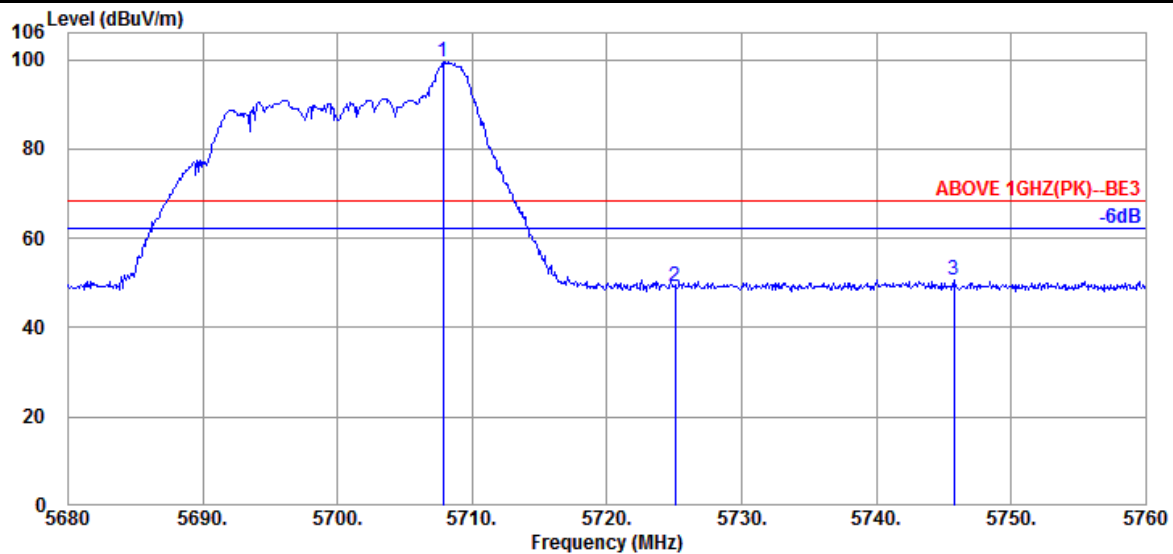

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.840	34.80	11.03	34.37	88.00	99.46	---	---	Peak
5725.040	34.80	11.05	34.37	37.85	49.33	68.20	19.86	Peak
5745.760	34.80	11.05	34.39	39.30	50.76	68.20	18.05	Peak

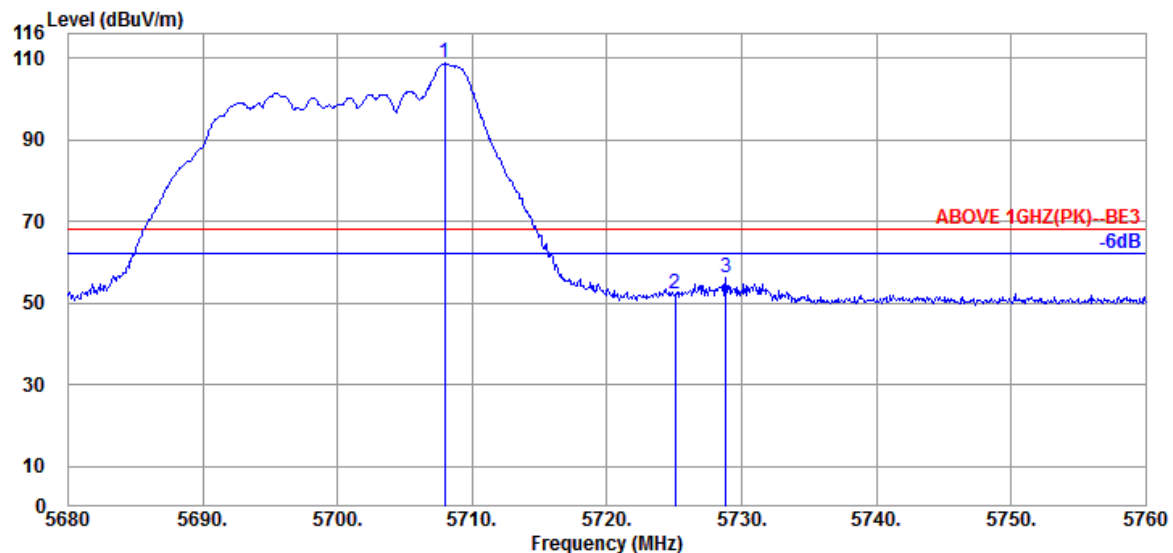

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.920	34.80	11.03	34.37	97.31	108.77	---	---	Peak
5725.040	34.80	11.05	34.37	40.97	52.45	68.20	20.38	Peak
5728.800	34.80	11.05	34.38	44.67	56.14	68.20	18.89	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Band	NII-2C
RU Configuration	52/40	Frequency	TX 5700MHz

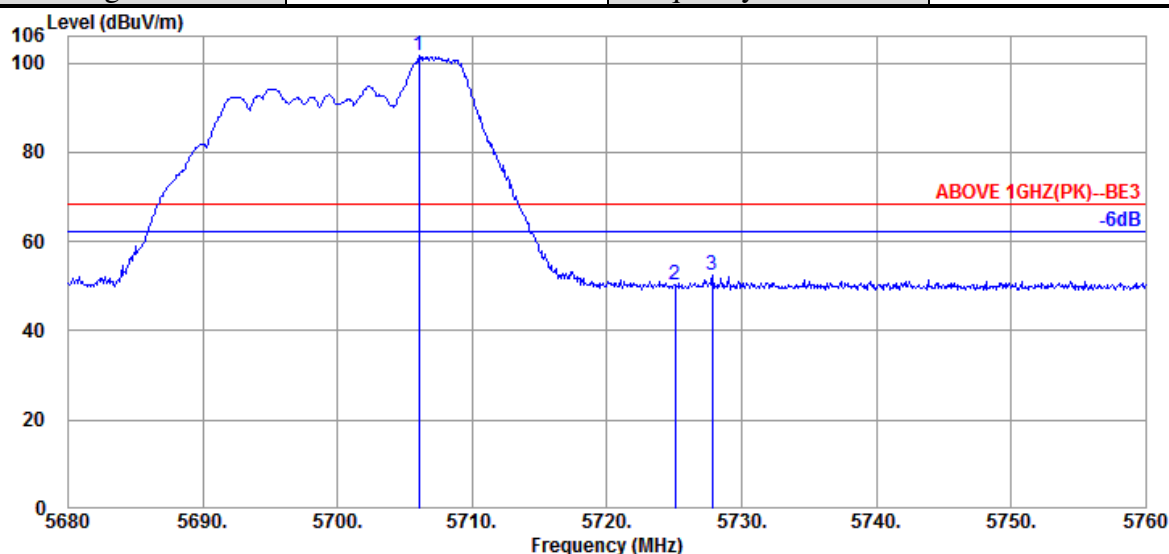

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.000	34.80	11.03	34.36	90.14	101.61	---	---	Peak
5725.040	34.80	11.05	34.37	38.87	50.35	68.20	20.34	Peak
5727.840	34.80	11.05	34.38	40.86	52.33	68.20	18.94	Peak

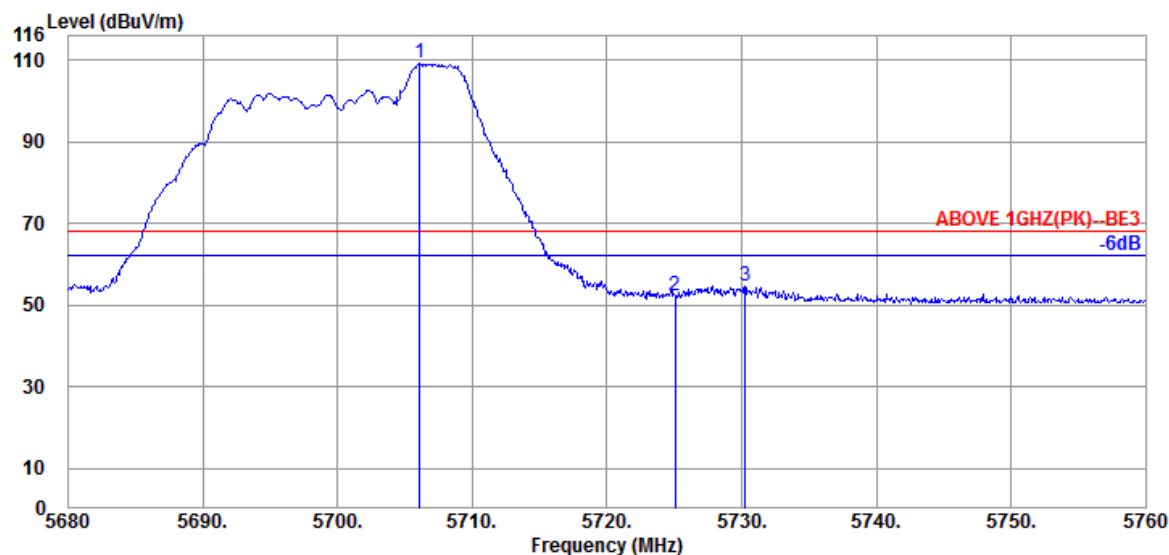

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.080	34.80	11.03	34.36	97.85	109.32	---	---	Peak
5725.040	34.80	11.05	34.37	40.96	52.44	68.20	20.71	Peak
5730.240	34.80	11.05	34.38	43.27	54.74	68.20	17.08	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM2010181

Report Number: EM-F200514

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Band	NII-2C
RU Configuration	106/54	Frequency	TX 5700MHz

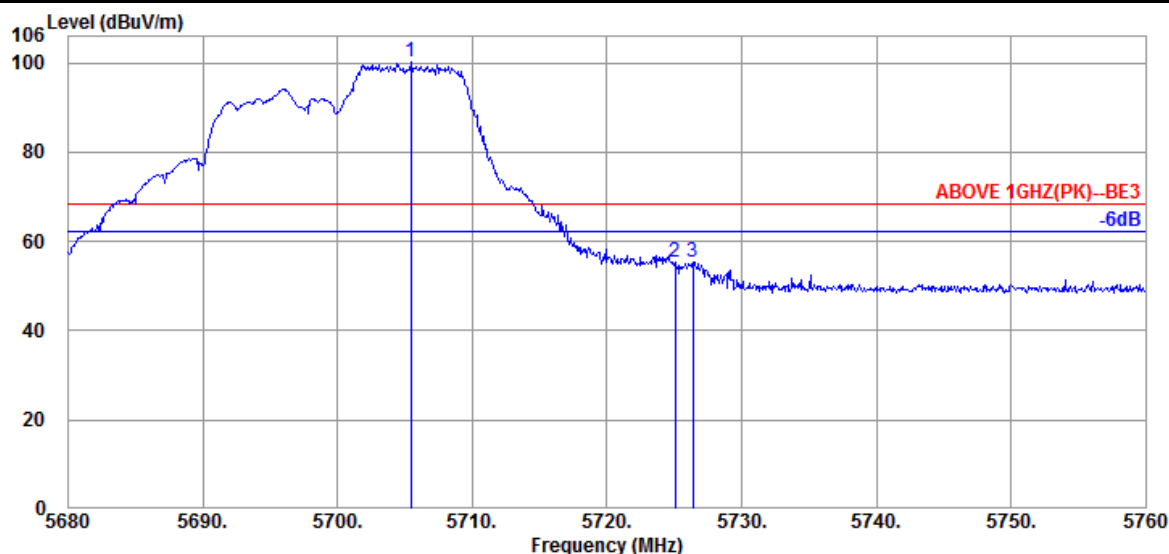

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5705.440	34.80	11.03	34.36	88.67	100.14	---	---	Peak
5725.040	34.80	11.05	34.37	43.94	55.42	68.20	21.11	Peak
5726.400	34.80	11.05	34.38	43.81	55.28	68.20	18.80	Peak

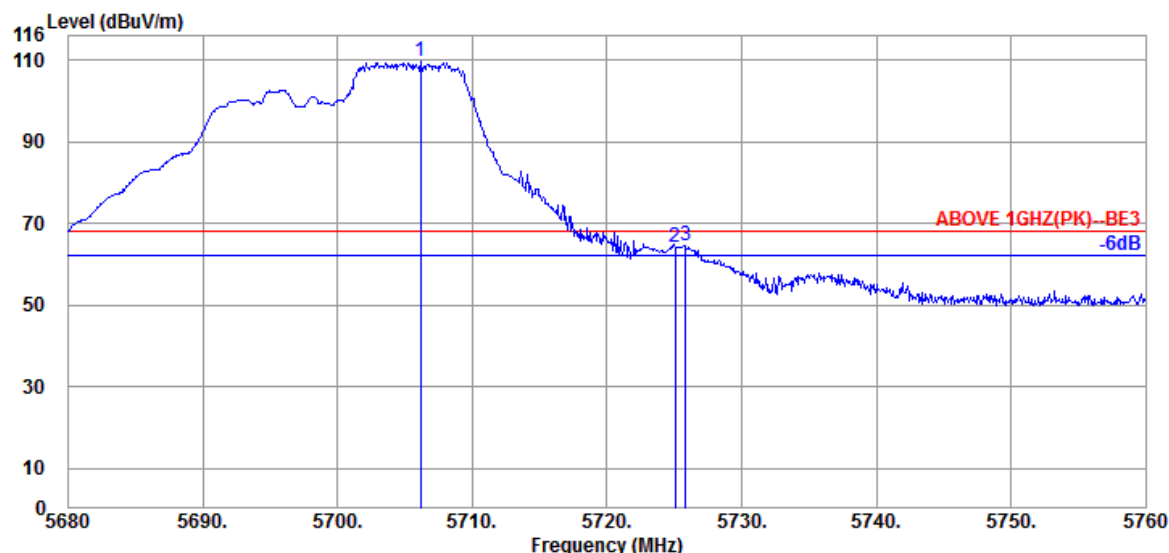

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.160	34.80	11.03	34.36	98.12	109.59	---	---	Peak
5725.040	34.80	11.05	34.37	52.51	63.99	68.20	18.72	Peak
5725.840	34.80	11.05	34.37	52.87	64.35	68.20	10.93	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM2010181

Report Number: EM-F200514


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Band	NII-III
RU Configuration	26/0	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

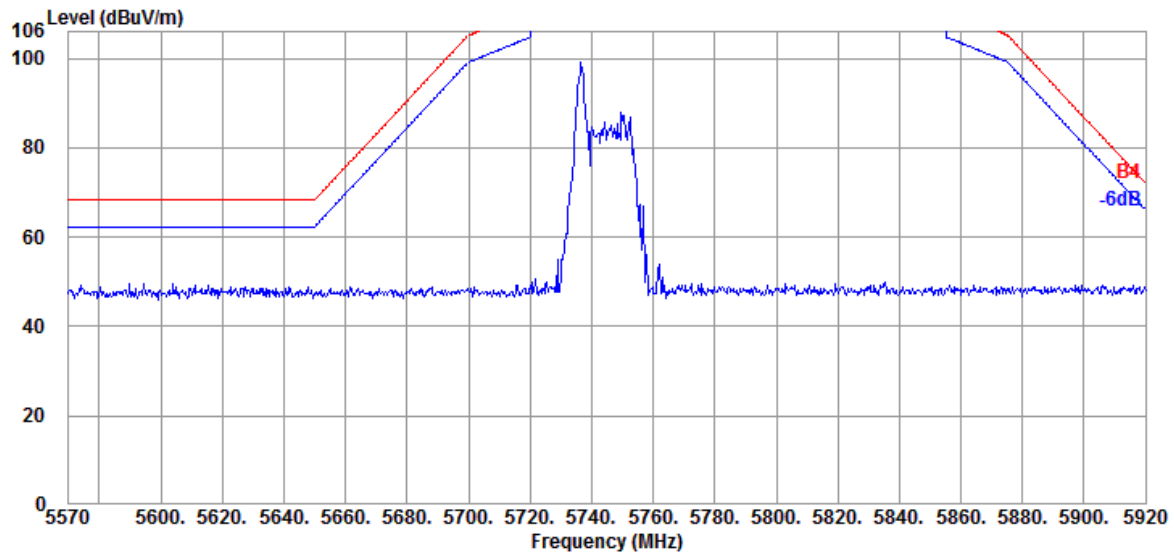

Antenna at Vertical Polarization

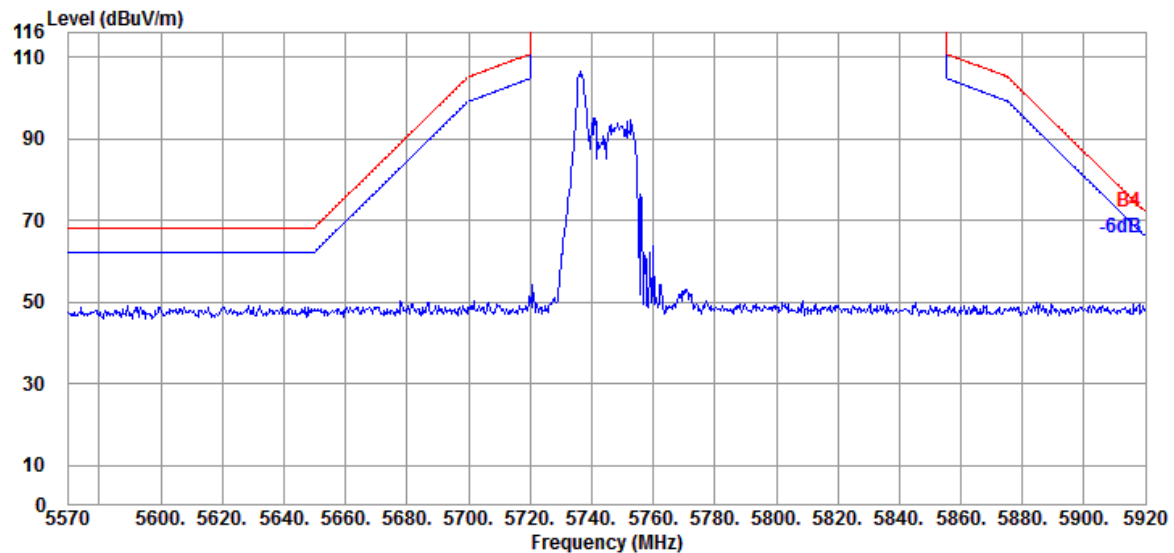


Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Band	NII-III
RU Configuration	52/37	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

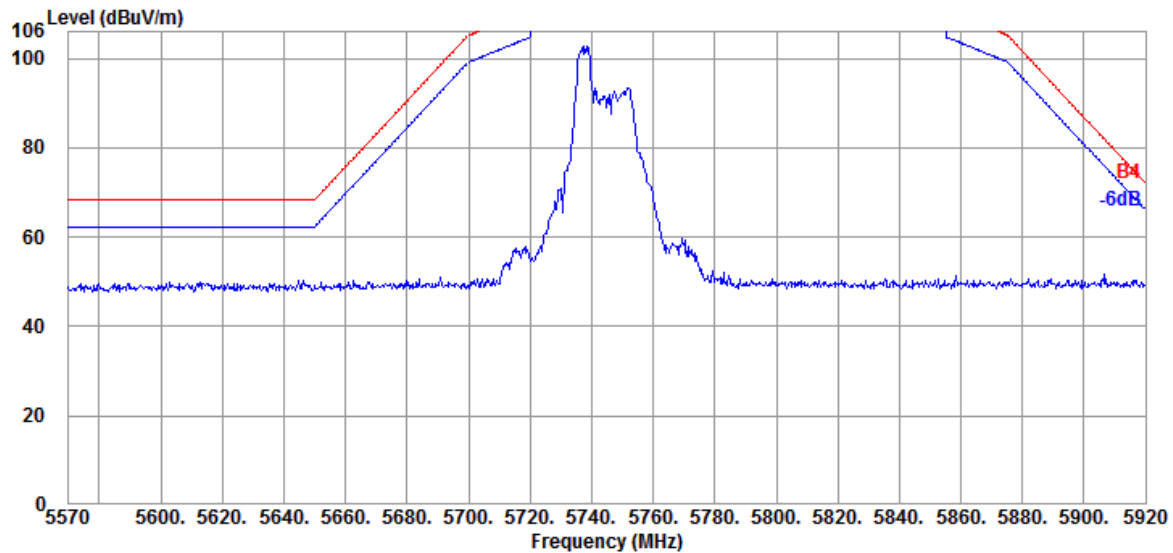

Antenna at Vertical Polarization

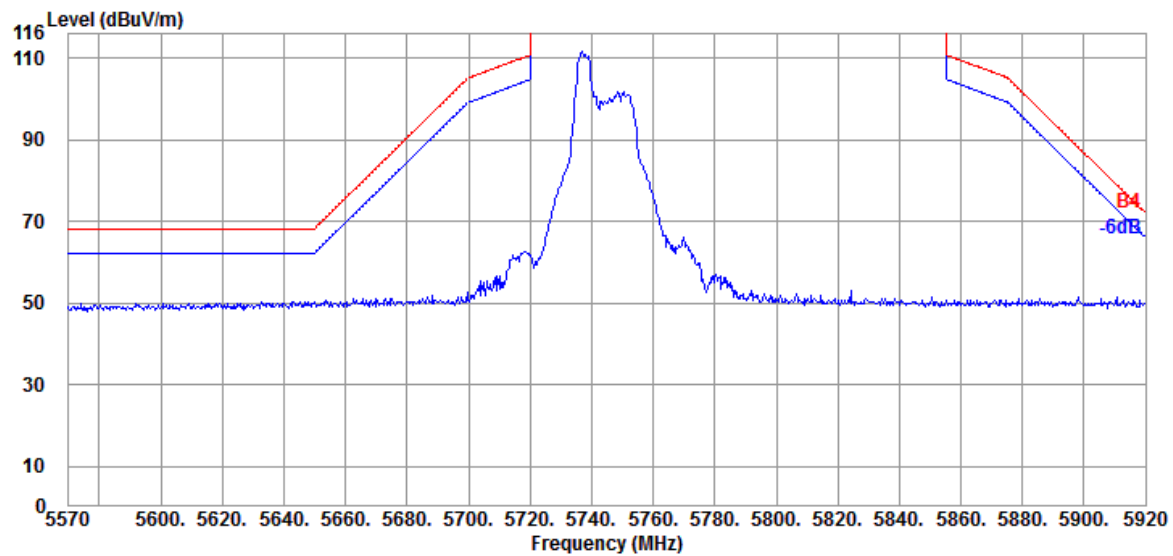


Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Band	NII-III
RU Configuration	106/53	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

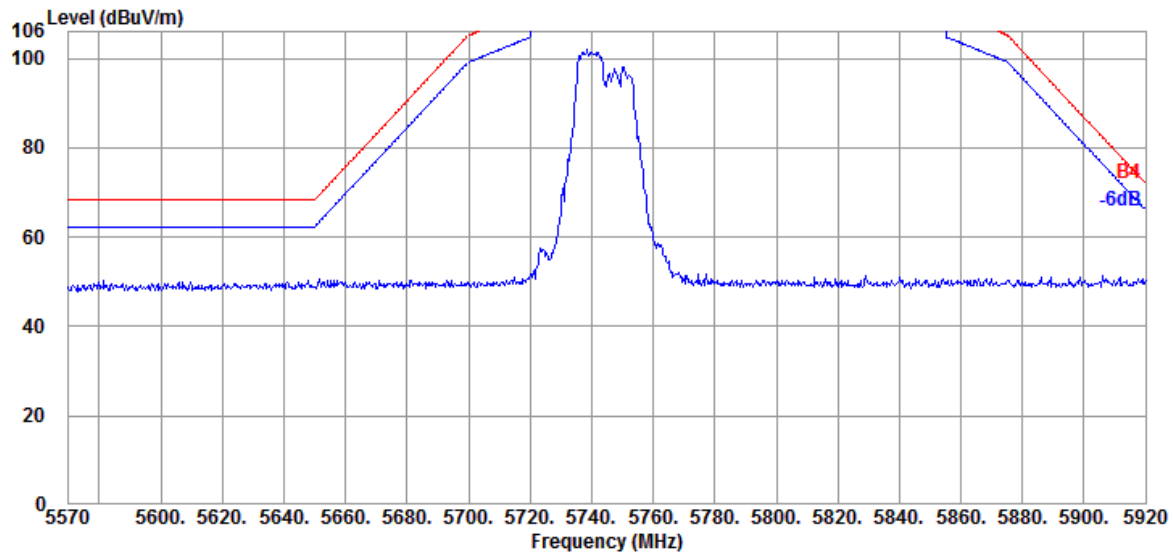


Antenna at Vertical Polarization

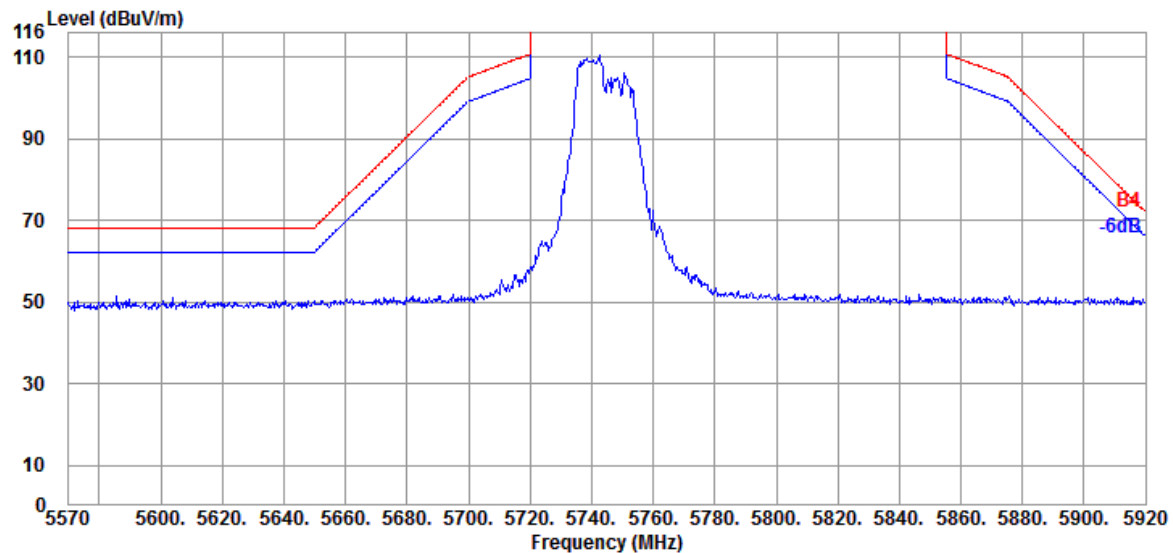


Mode	802.11ax-HE20	Band	NII-III
RU Configuration	26/8	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

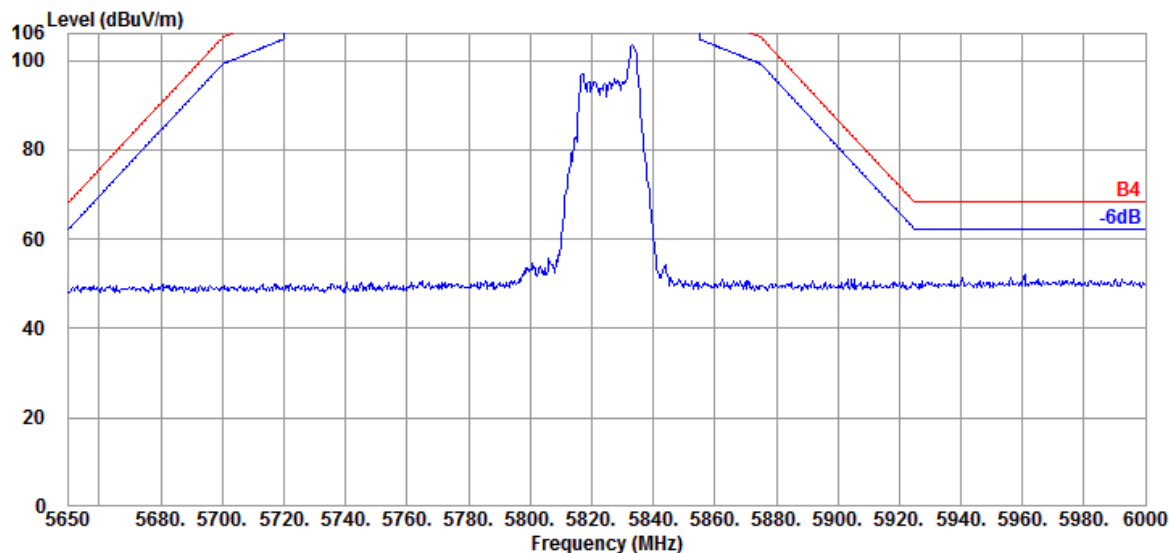

Antenna at Vertical Polarization

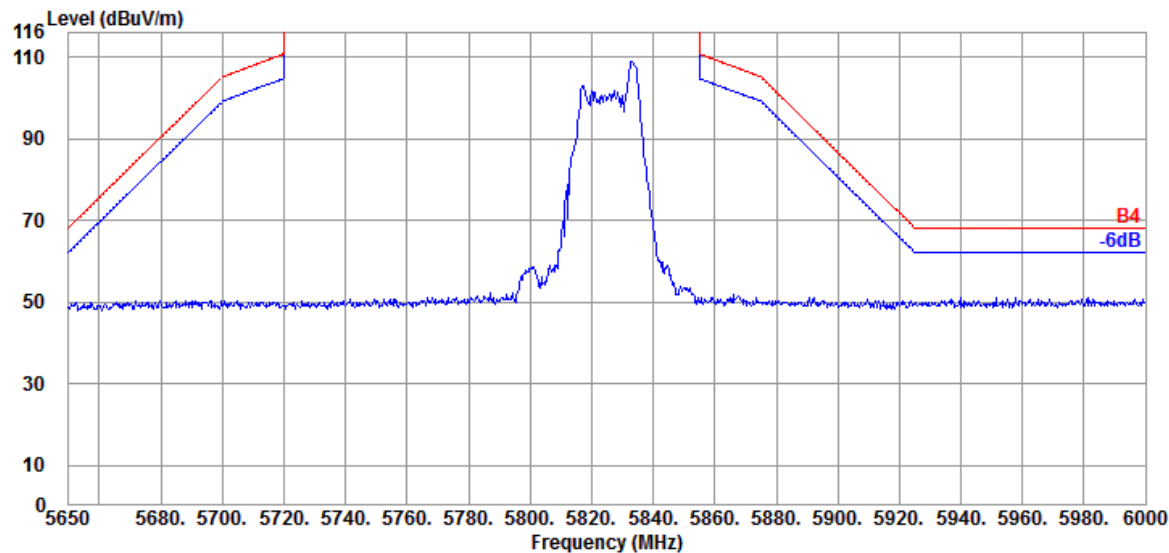


Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Band	NII-III
RU Configuration	52/40	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

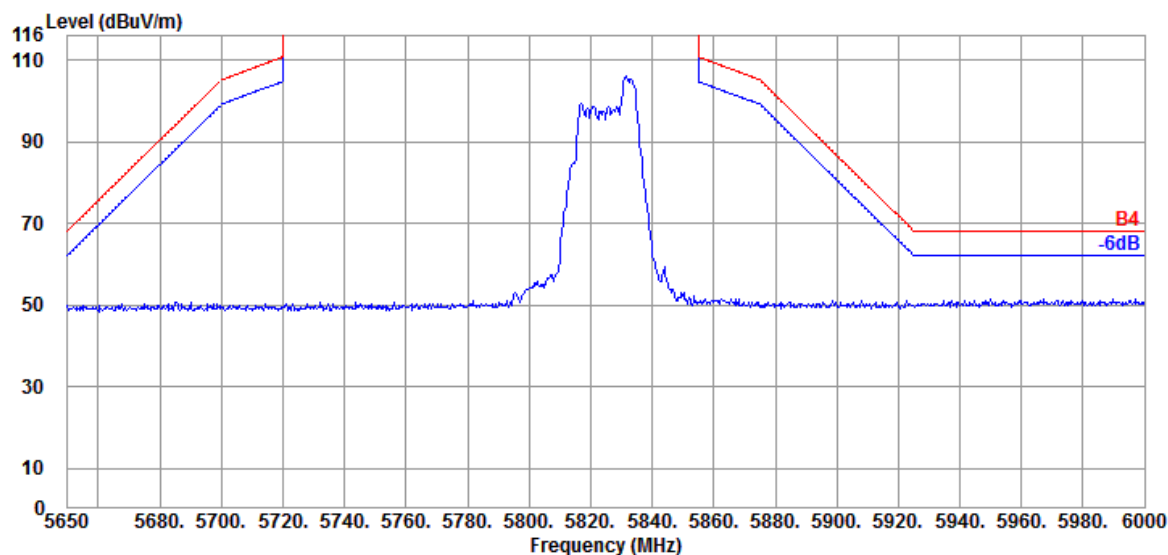

Antenna at Vertical Polarization

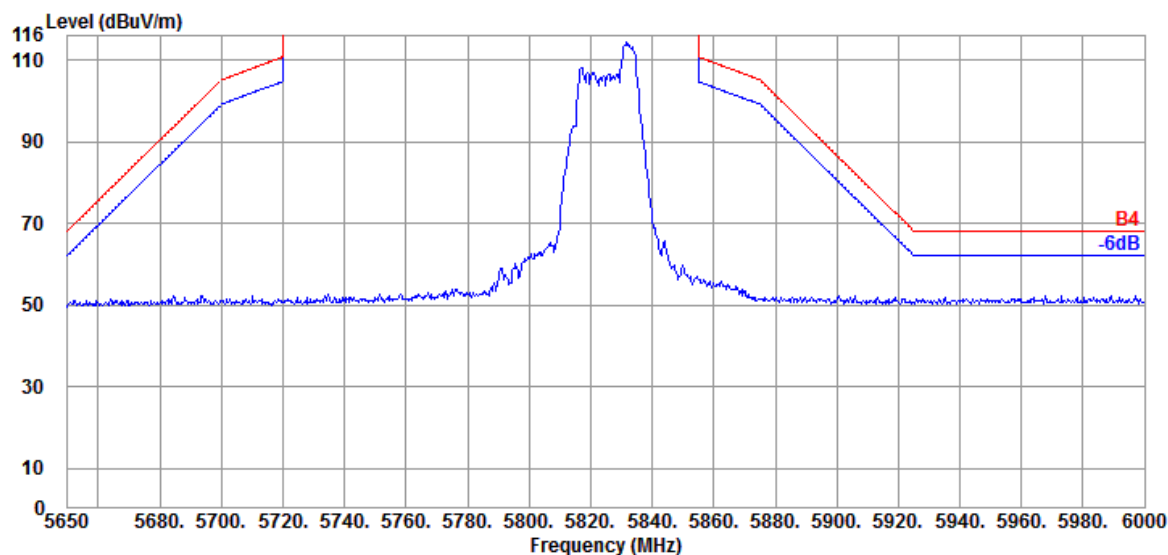


Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Band	NII-III
RU Configuration	106/54	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

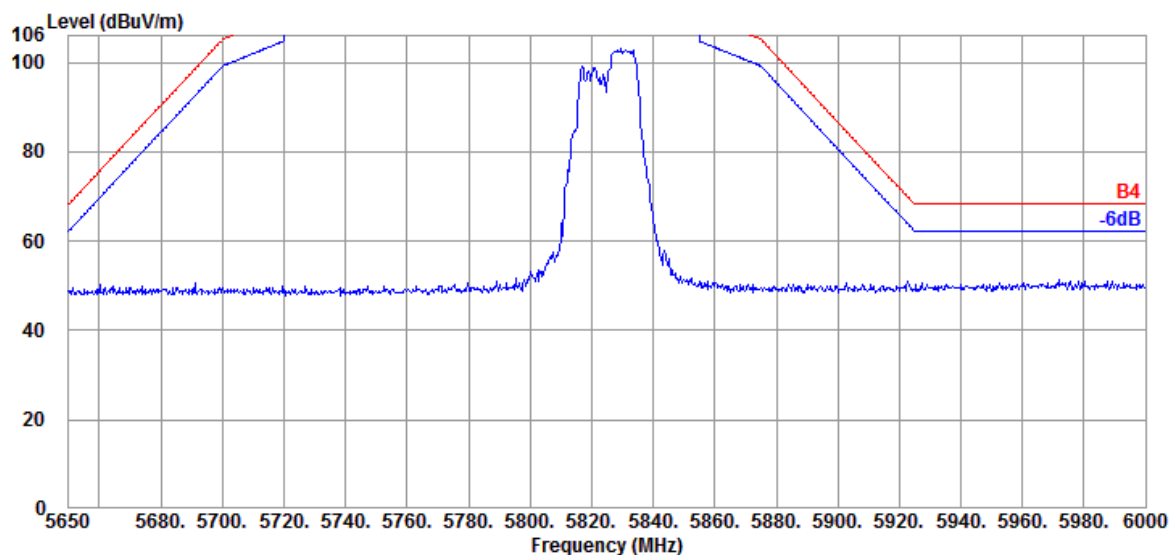

Antenna at Vertical Polarization

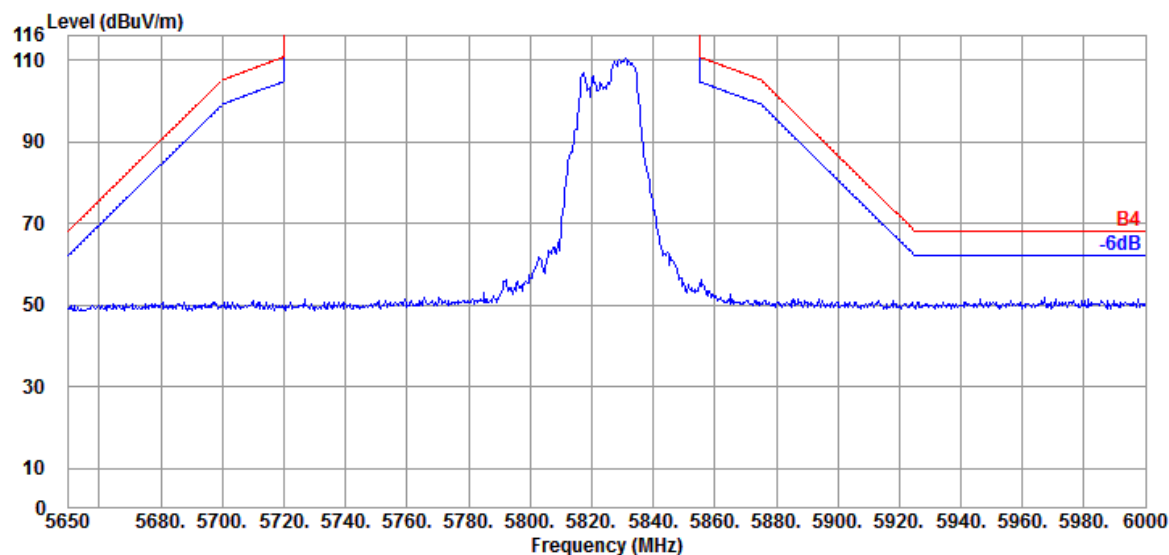

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Band	NII-I
RU Configuration	242/61	Frequency	TX 5190MHz

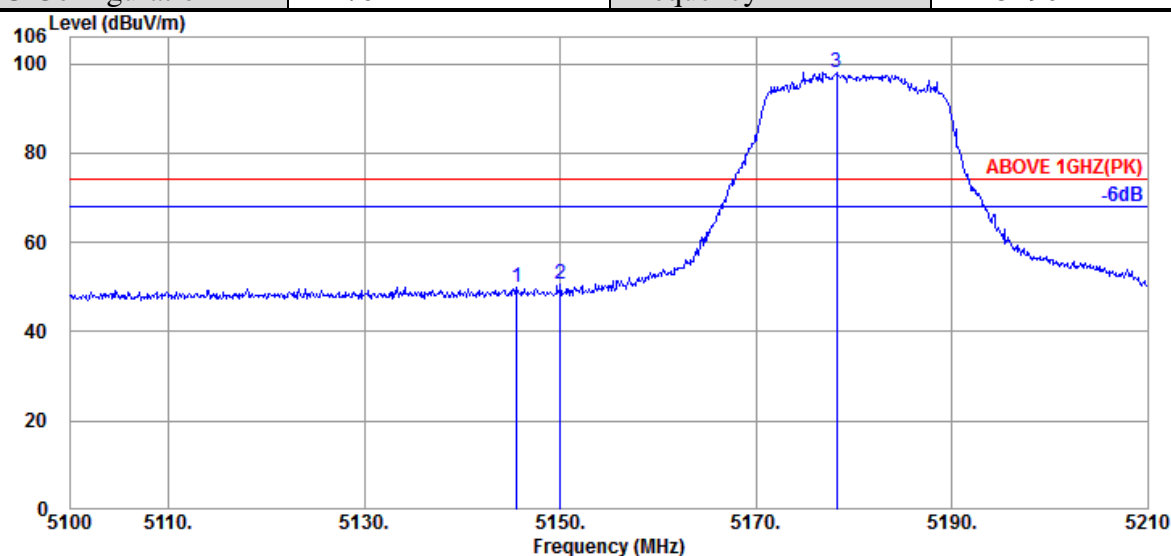

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.540	34.40	10.70	34.38	39.26	49.98	74.00	25.19	Peak
5150.050	34.40	10.70	34.38	39.82	50.54	74.00	27.09	Peak
@ 5178.210	34.47	10.72	34.37	87.21	98.03	---	---	Peak

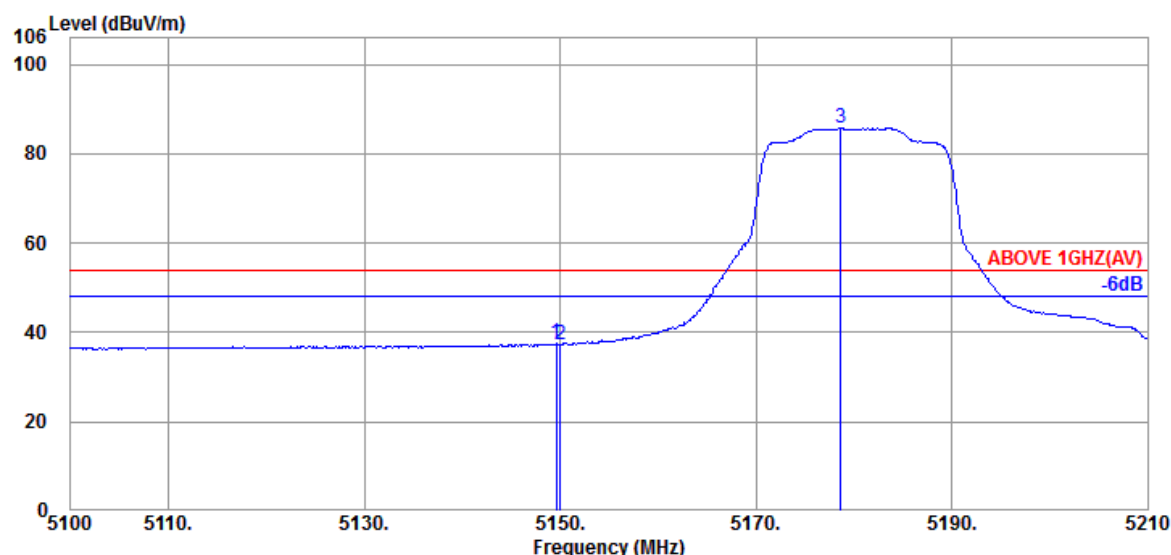

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.610	34.40	10.70	34.38	26.77	37.49	54.00	16.82	Average
5150.050	34.40	10.70	34.38	26.57	37.29	54.00	16.96	Average
@ 5178.650	34.47	10.72	34.37	74.93	85.75	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM2010181

Report Number: EM-F200514


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ax-HE40	Band	NII-I
RU Configuration	242/61	Frequency	TX 5190MHz

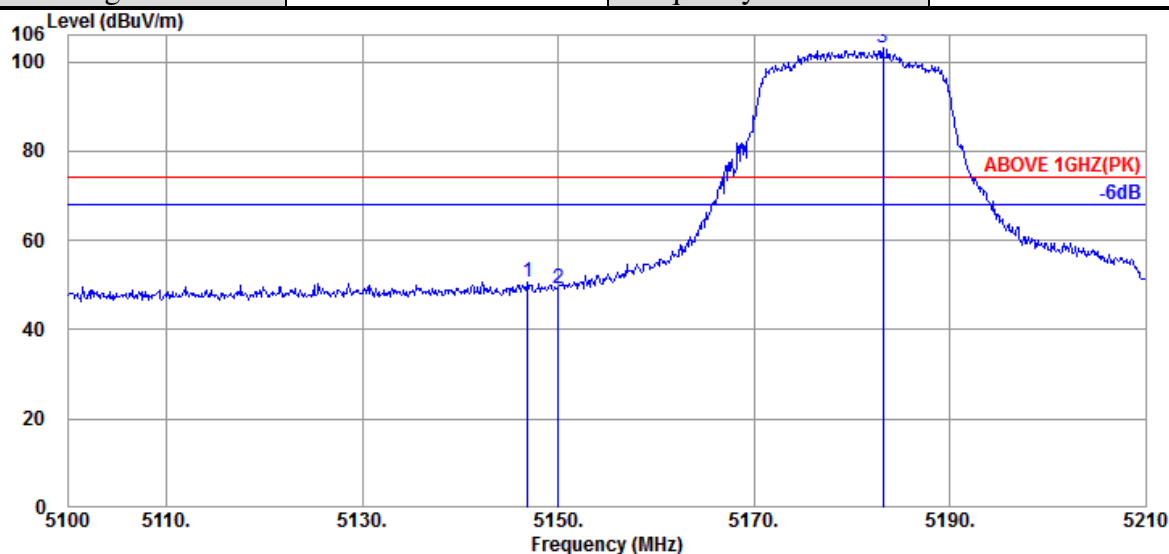

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.860	34.40	10.70	34.38	39.87	50.59	74.00	24.13	Peak
5150.050	34.40	10.70	34.38	38.39	49.11	74.00	25.02	Peak
@ 5183.160	34.47	10.72	34.37	92.20	103.02	---	---	Peak

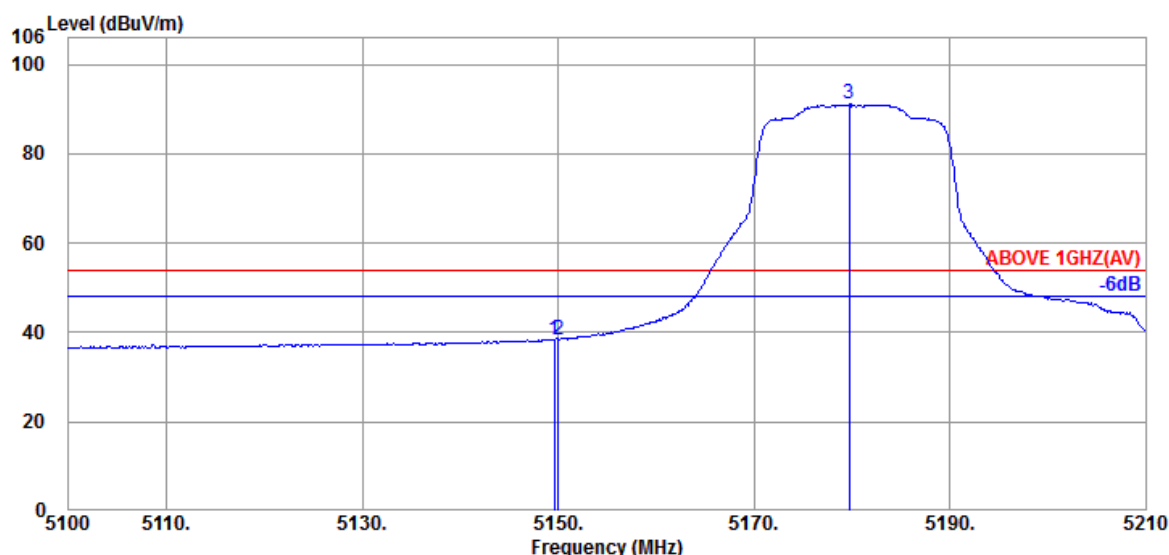


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.610	34.40	10.70	34.38	27.76	38.48	54.00	15.14	Average
5150.050	34.40	10.70	34.38	27.80	38.52	54.00	15.30	Average
@ 5179.750	34.47	10.72	34.37	80.28	91.10	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-2A
RU Configuration	242/62	Frequency	TX 5310MHz

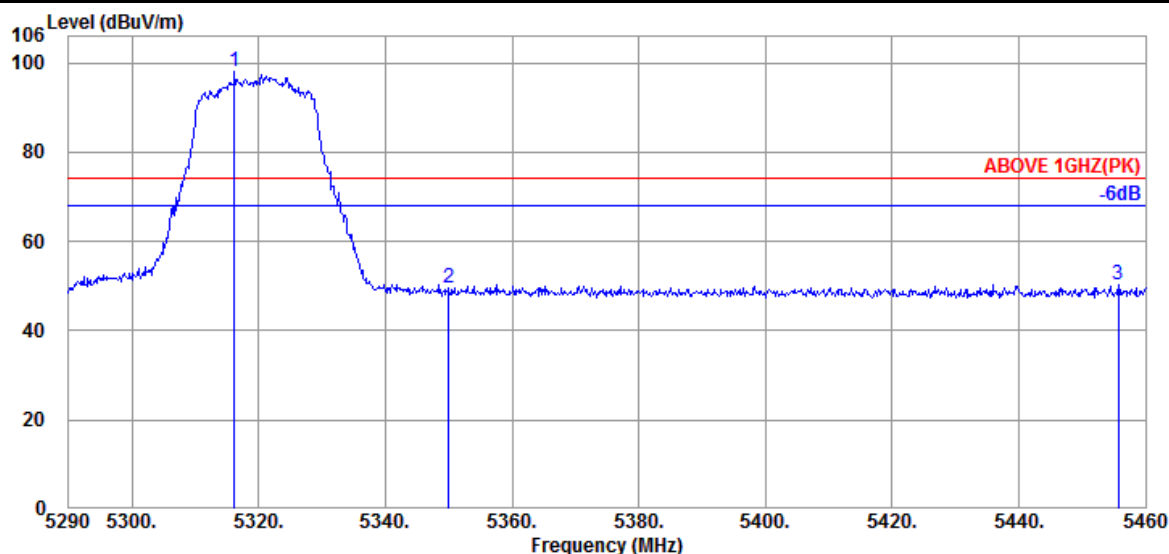

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5316.180	34.60	10.81	34.33	87.01	98.09	---	---	Peak
	5350.010	34.60	10.83	34.31	38.35	49.47	74.00	27.37	Peak
	5455.750	34.70	10.89	34.28	39.13	50.44	74.00	23.58	Peak

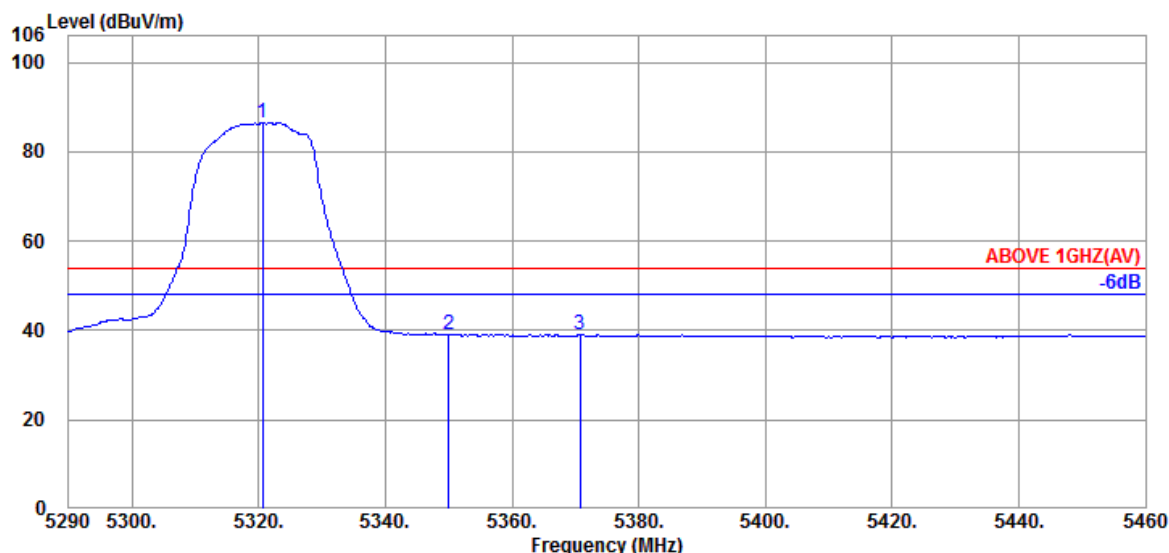


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5320.600	34.60	10.81	34.33	75.36	86.44	---	---	Average
	5350.010	34.60	10.83	34.31	27.93	39.05	54.00	16.60	Average
	5370.750	34.60	10.85	34.31	27.99	39.13	54.00	16.20	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-2A
RU Configuration	242/62	Frequency	TX 5310MHz

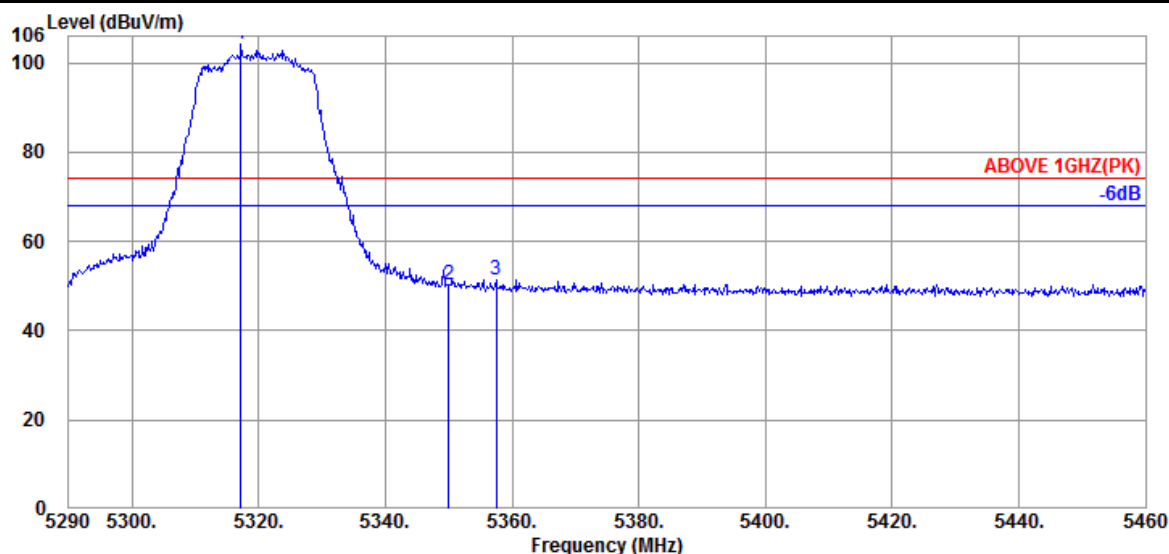

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5317.200	34.60	10.81	34.33	93.07	104.15	---	---	Peak
	5350.010	34.60	10.83	34.31	39.30	50.42	74.00	19.23	Peak
	5357.490	34.60	10.85	34.31	40.23	51.37	74.00	20.41	Peak

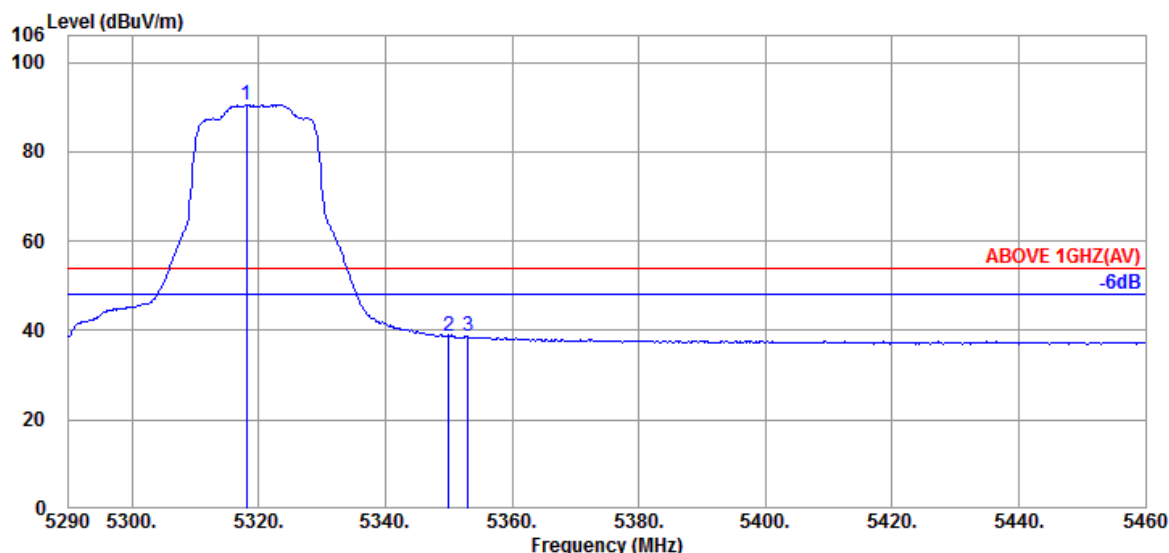

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5318.050	34.60	10.81	34.33	79.46	90.54	---	---	Average
	5350.010	34.60	10.83	34.31	27.67	38.79	54.00	14.00	Average
	5353.070	34.60	10.83	34.31	27.47	38.59	54.00	13.88	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Band	NII-2C
RU Configuration	242/61	Frequency	TX 5510MHz

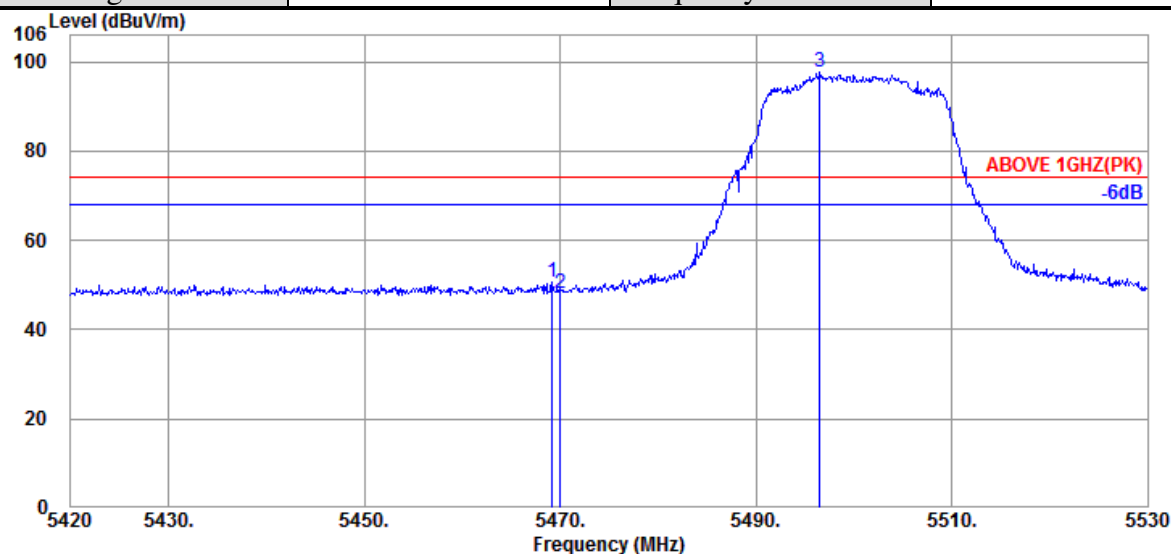

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.170	34.67	10.91	34.28	39.22	50.52	74.00	24.82	Peak
5470.050	34.67	10.91	34.28	36.99	48.29	74.00	26.15	Peak
@ 5496.560	34.60	10.93	34.27	86.55	97.81	---	---	Peak

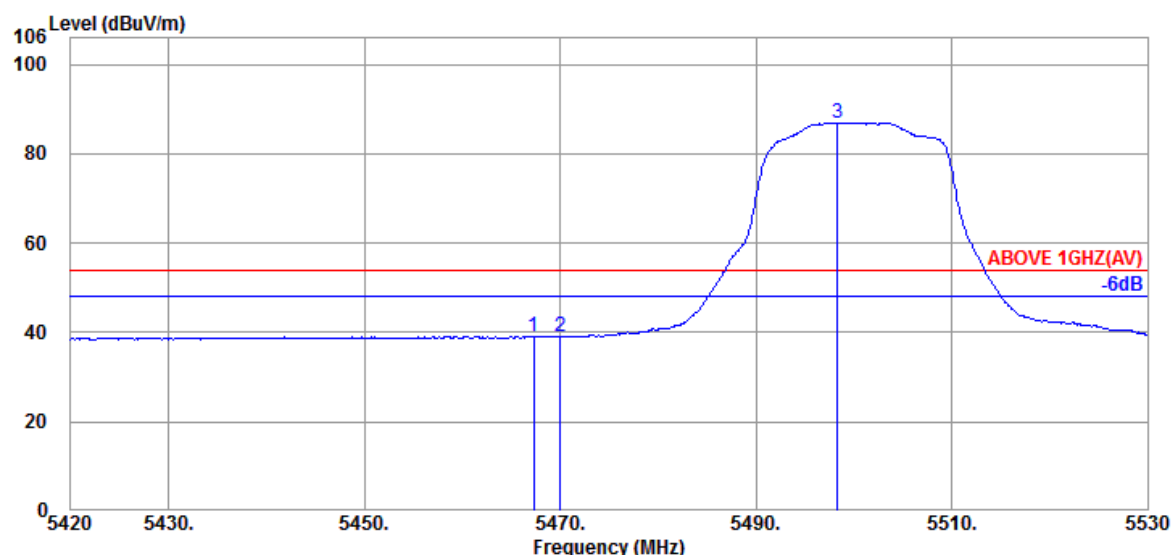

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.300	34.67	10.91	34.28	27.94	39.24	54.00	16.33	Average
5470.050	34.67	10.91	34.28	27.84	39.14	54.00	16.36	Average
@ 5498.320	34.60	10.93	34.27	75.73	86.99	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Band	NII-2C
RU Configuration	242/61	Frequency	TX 5510MHz

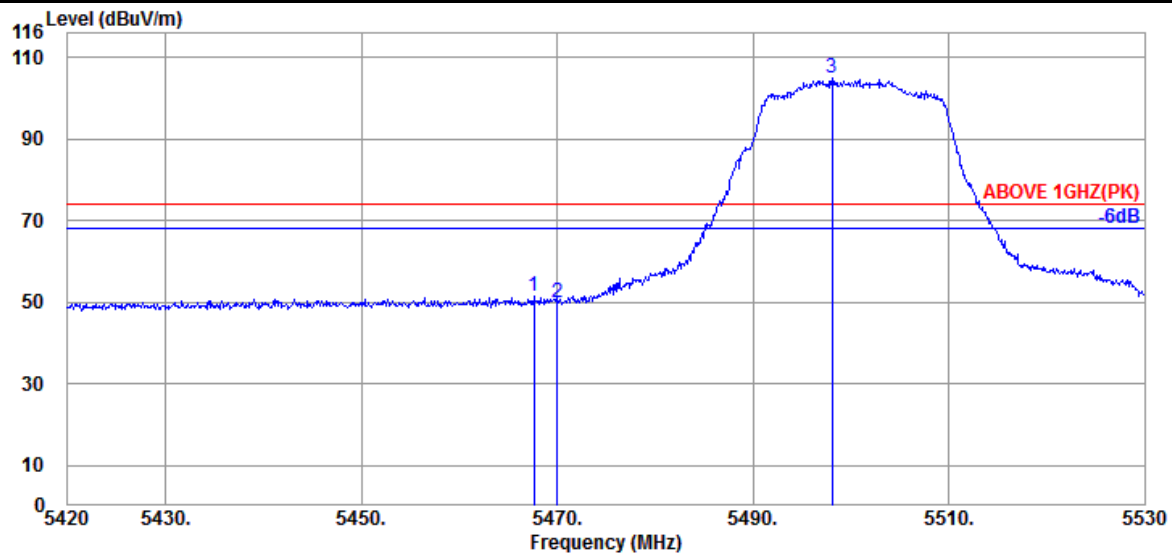

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5467.630	34.67	10.91	34.28	40.11	51.41	74.00	21.57	Peak
5470.050	34.67	10.91	34.28	38.74	50.04	74.00	25.29	Peak
@ 5498.100	34.60	10.93	34.27	93.46	104.72	---	---	Peak

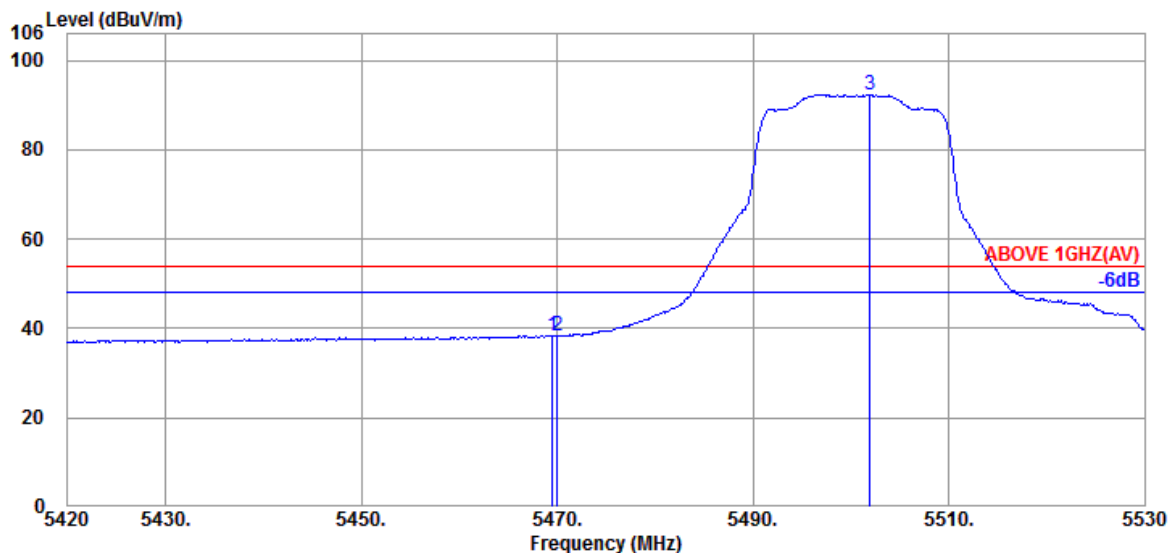


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5469.500	34.67	10.91	34.28	27.17	38.47	54.00	15.14	Average
5470.050	34.67	10.91	34.28	26.90	38.20	54.00	15.10	Average
@ 5501.950	34.60	10.93	34.27	81.04	92.30	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Band	NII-2C
RU Configuration	242/62	Frequency	TX 5670MHz

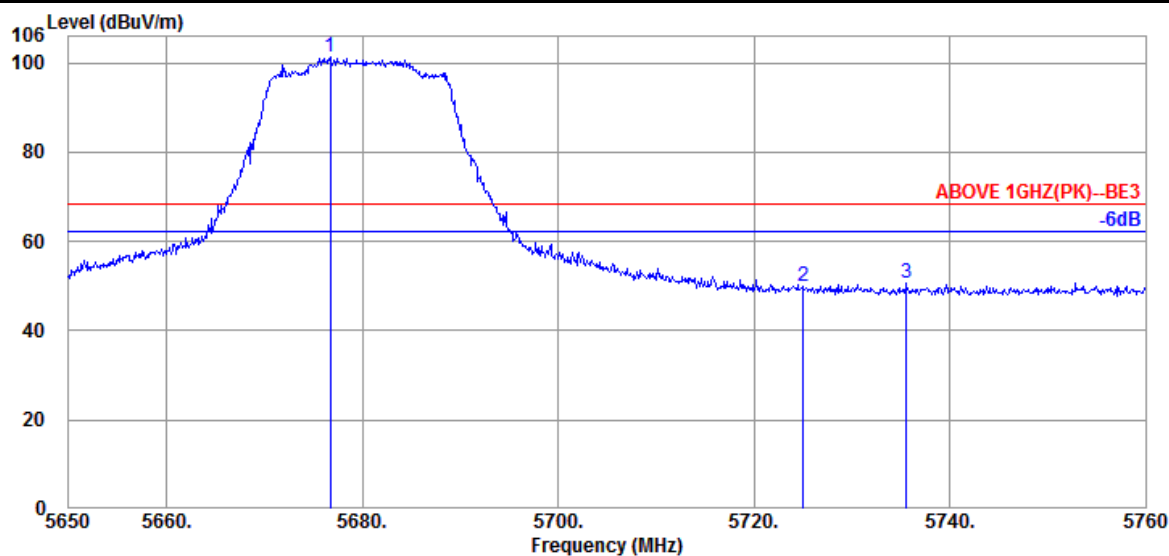

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5676.730	34.73	11.03	34.36	89.95	101.35	---	---	Peak
5725.020	34.80	11.05	34.37	38.34	49.82	68.20	21.03	Peak
5735.580	34.80	11.05	34.38	39.10	50.57	68.20	18.47	Peak

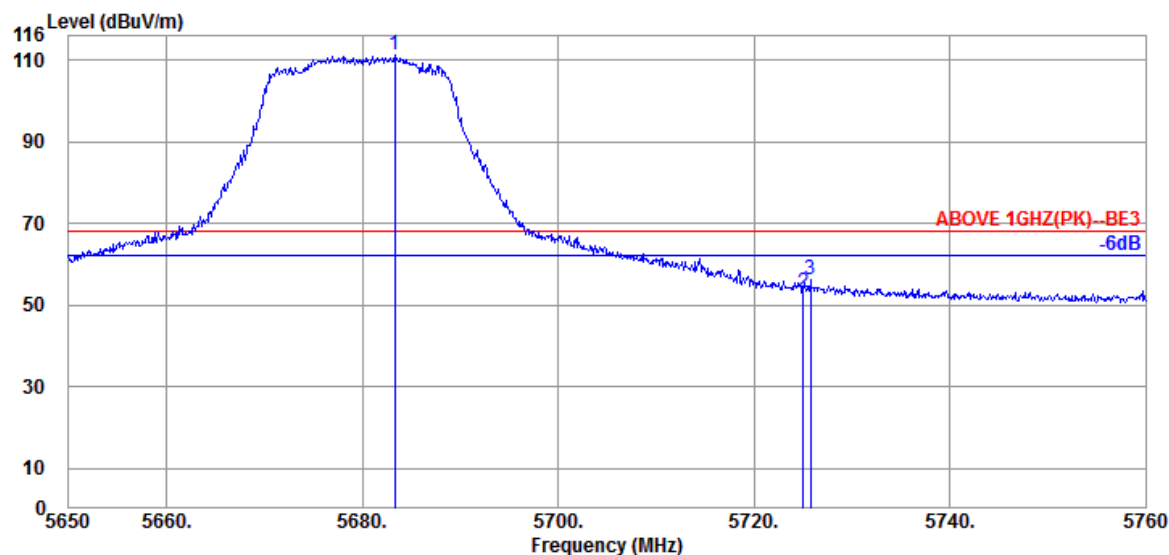

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5683.330	34.73	11.03	34.36	99.67	111.07	---	---	Peak
5725.020	34.80	11.05	34.37	41.76	53.24	68.20	20.79	Peak
5725.790	34.80	11.05	34.37	44.69	56.17	68.20	18.92	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Band	NII-III
RU Configuration	242/61	Frequency	TX 5755MHz

Antenna at Horizontal Polarization

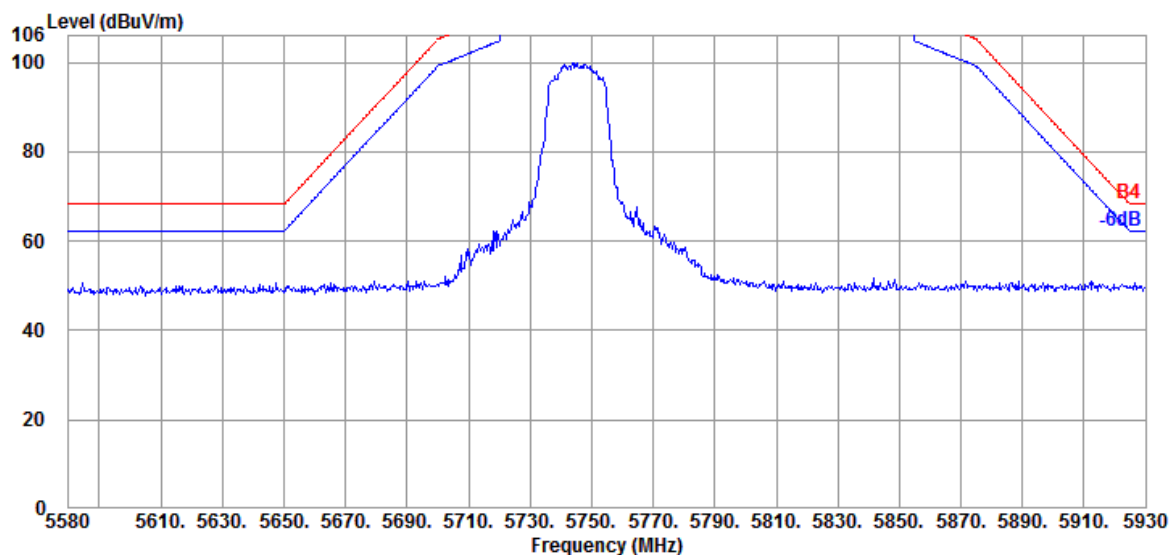

Antenna at Vertical Polarization

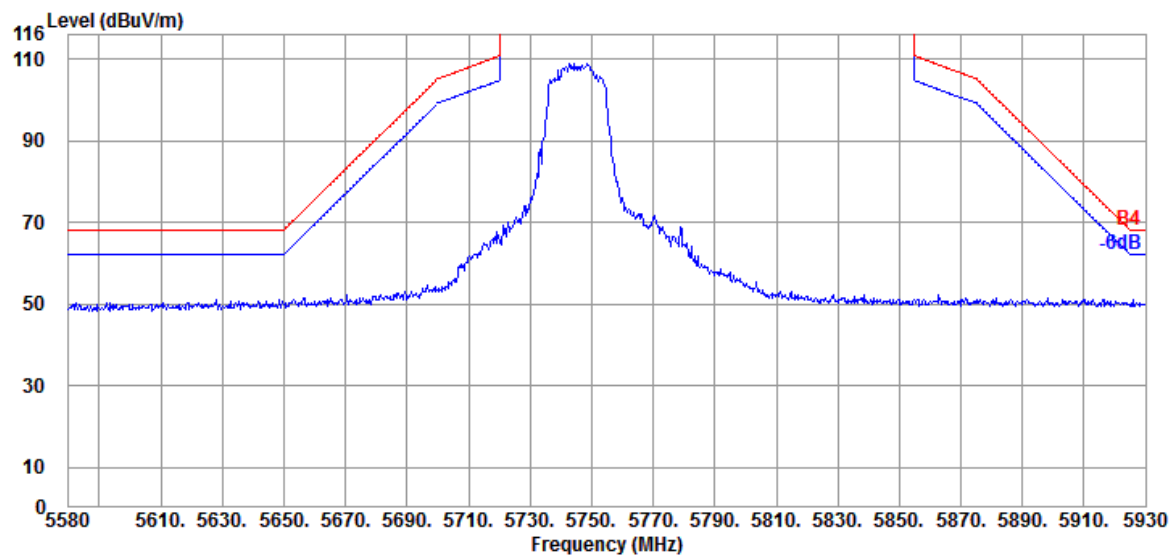


Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Band	NII-III
RU Configuration	242/62	Frequency	TX 5795MHz

Antenna at Horizontal Polarization

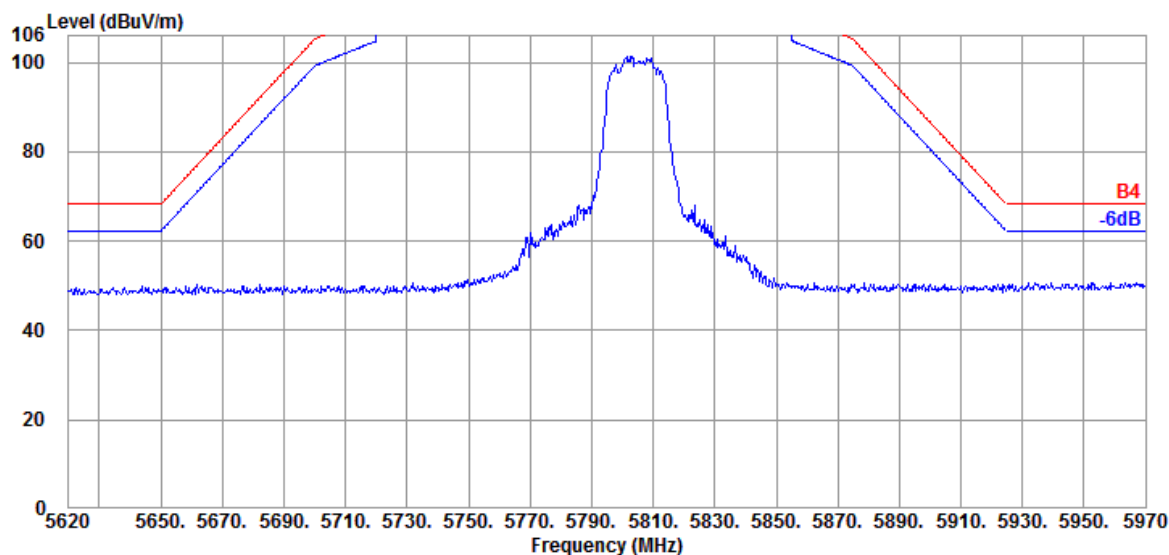


Antenna at Vertical Polarization

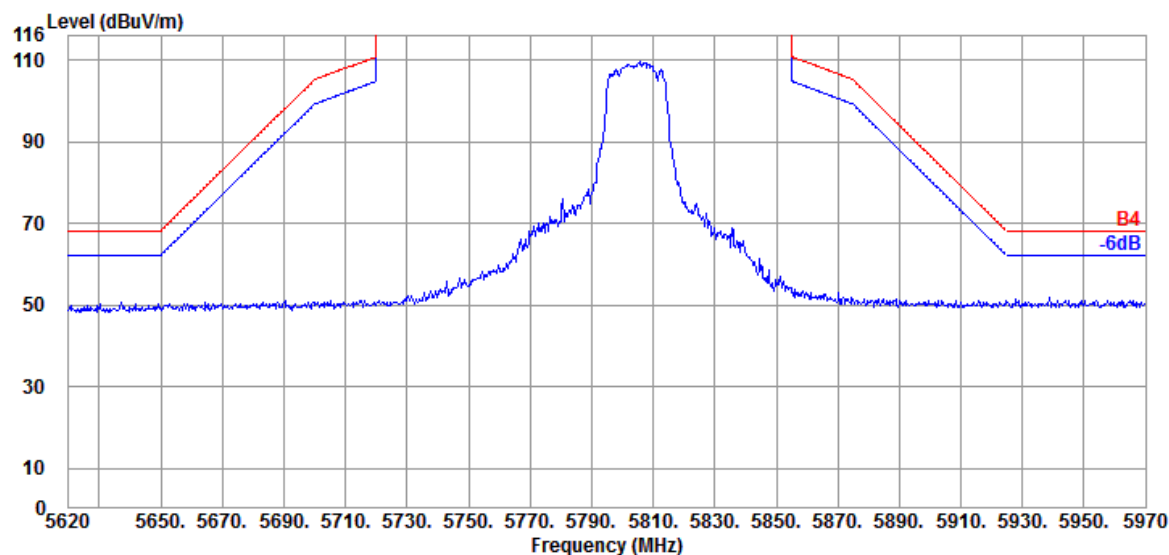

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	Band	NII-I
RU Configuration	484/65	Frequency	TX 5210MHz

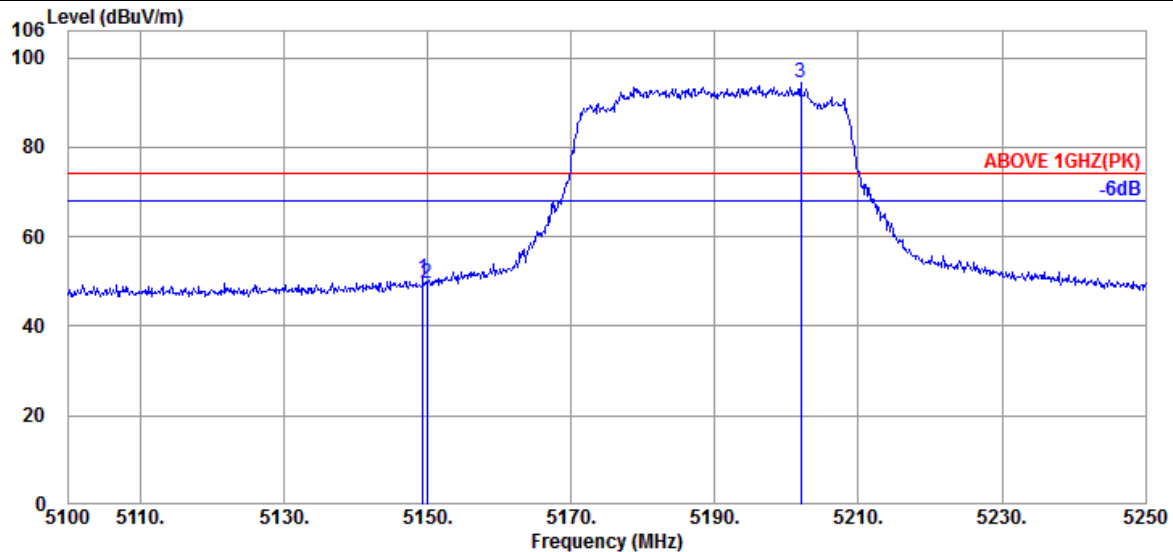

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.350	34.40	10.70	34.38	39.90	50.62	74.00	25.35	Peak
5149.950	34.40	10.70	34.38	38.67	49.39	74.00	26.79	Peak
@ 5202.000	34.50	10.74	34.36	83.60	94.48	---	---	Peak

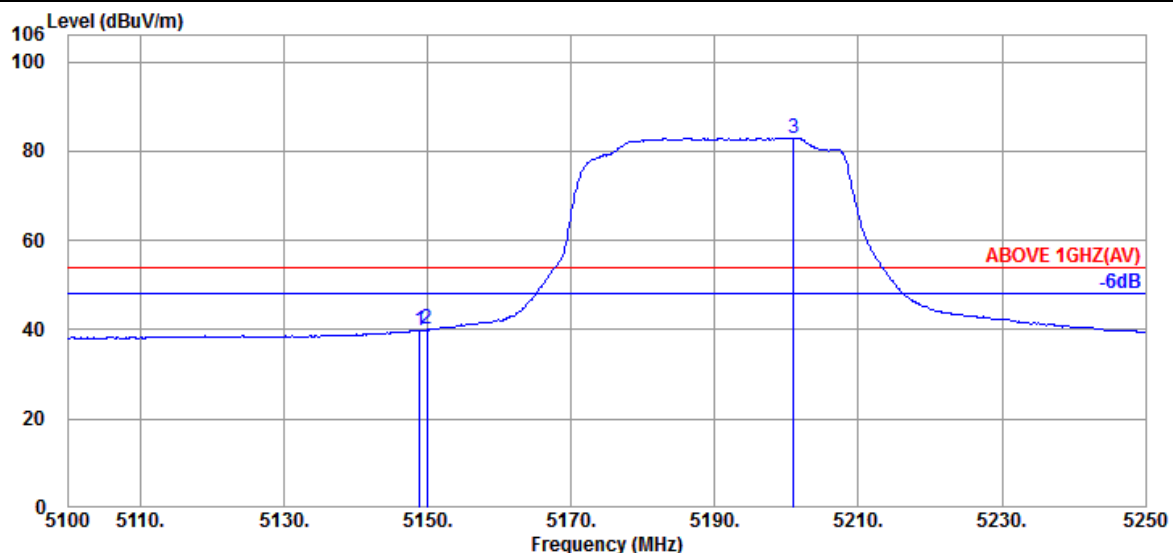


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.900	34.40	10.70	34.38	29.07	39.79	54.00	16.63	Average
5149.950	34.40	10.70	34.38	29.27	39.99	54.00	16.70	Average
@ 5200.950	34.50	10.74	34.36	72.09	82.97	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	Band	NII-I
RU Configuration	484/65	Frequency	TX 5210MHz

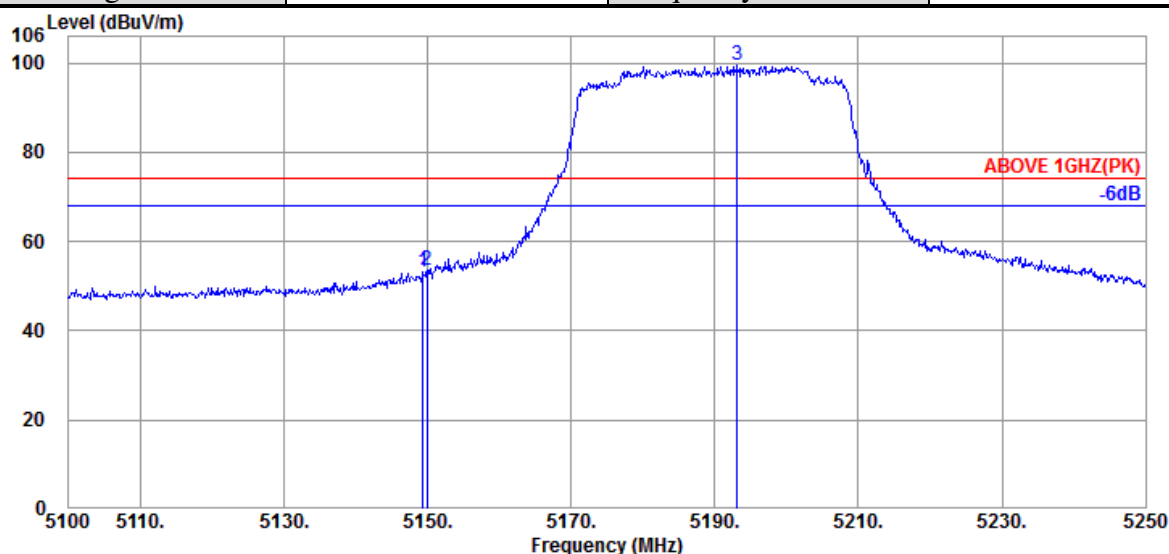

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.350	34.40	10.70	34.38	42.47	53.19	74.00	23.76	Peak
5149.950	34.40	10.70	34.38	42.78	53.50	74.00	24.51	Peak
@ 5193.150	34.50	10.74	34.36	88.72	99.60	---	---	Peak

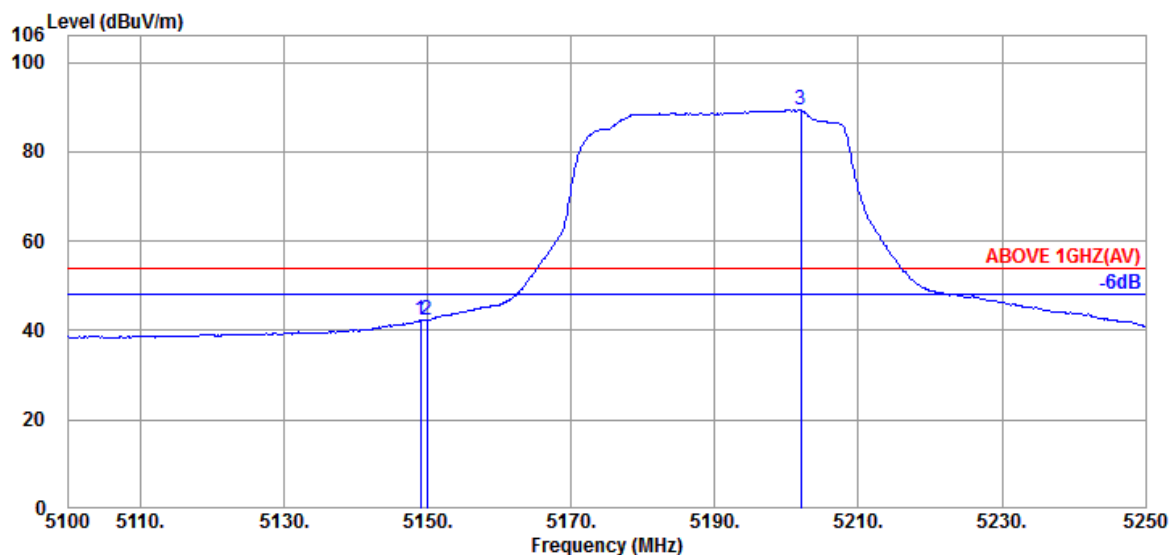

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.050	34.40	10.70	34.38	31.77	42.49	54.00	13.84	Average
5149.950	34.40	10.70	34.38	31.71	42.43	54.00	13.67	Average
@ 5202.000	34.50	10.74	34.36	78.47	89.35	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	Band	NII-2A
RU Configuration	484/66	Frequency	TX 5290MHz

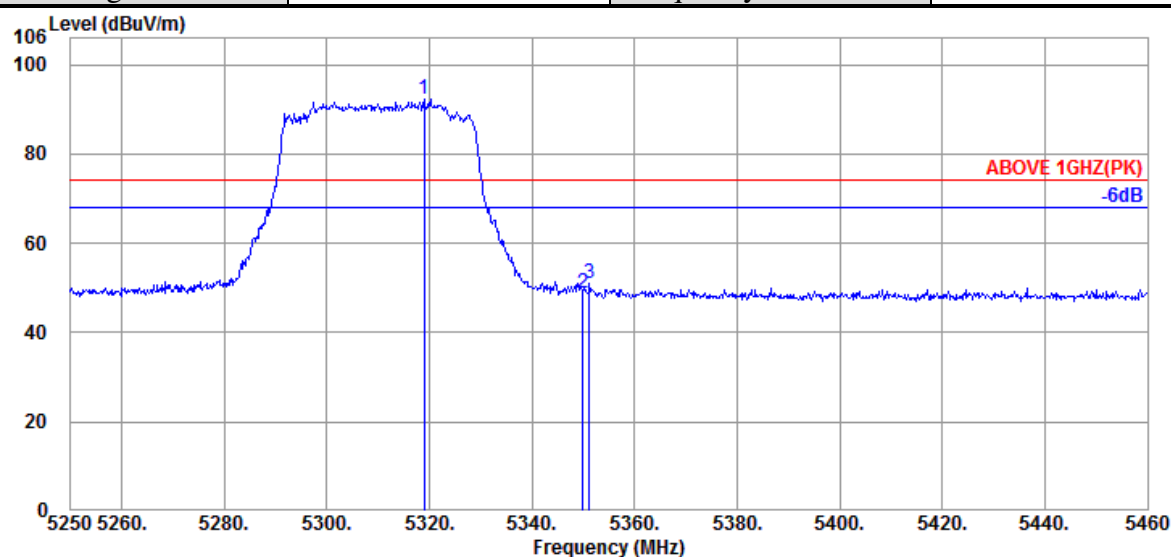

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5318.880	34.60	10.81	34.33	81.24	92.32	---	---	Peak
	5349.960	34.60	10.83	34.31	37.59	48.71	74.00	27.10	Peak
	5351.220	34.60	10.83	34.31	39.89	51.01	74.00	23.76	Peak

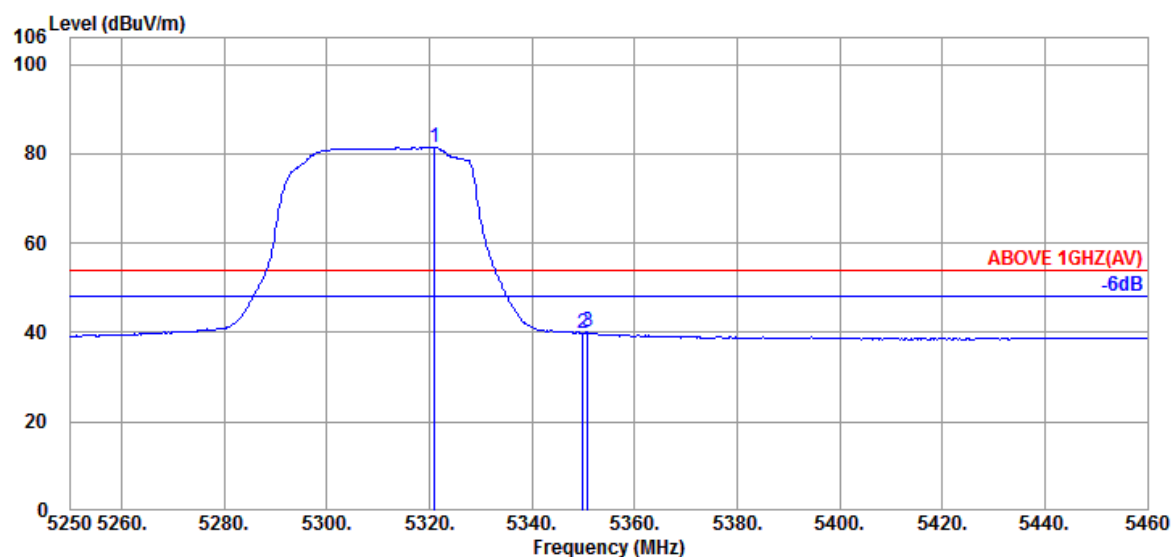

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5320.980	34.60	10.81	34.33	70.36	81.44	---	---	Average
	5349.960	34.60	10.83	34.31	28.71	39.83	54.00	16.81	Average
	5350.800	34.60	10.83	34.31	28.87	39.99	54.00	16.32	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM2010181

Report Number: EM-F200514

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	Band	NII-2A
RU Configuration	484/66	Frequency	TX 5290MHz

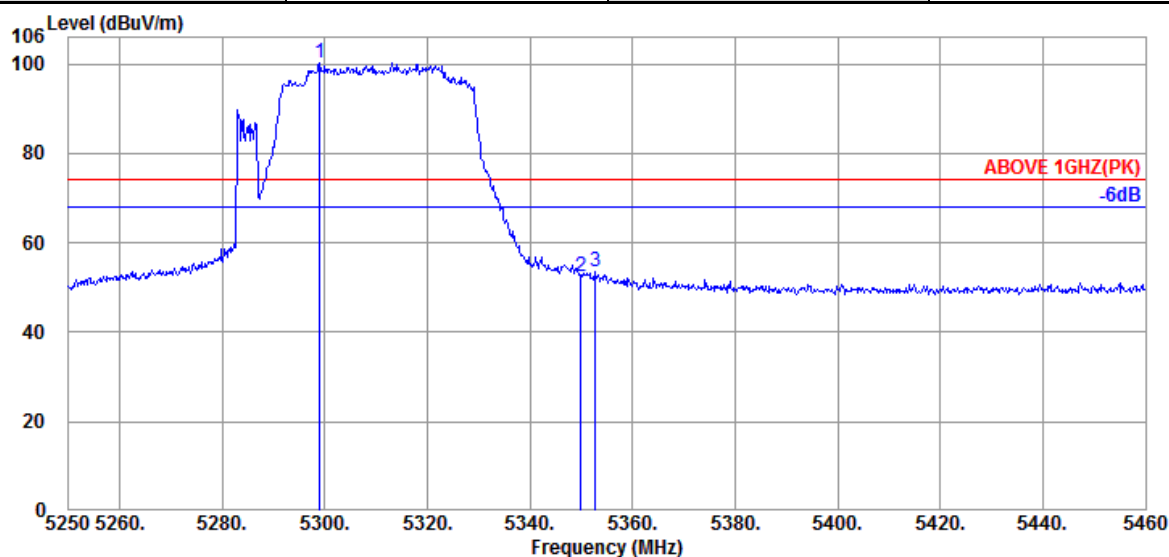

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5298.930	34.60	10.81	34.33	89.17	100.25	---	---	Peak
	5349.960	34.60	10.83	34.31	41.31	52.43	74.00	25.62	Peak
	5352.690	34.60	10.83	34.31	42.39	53.51	74.00	23.79	Peak

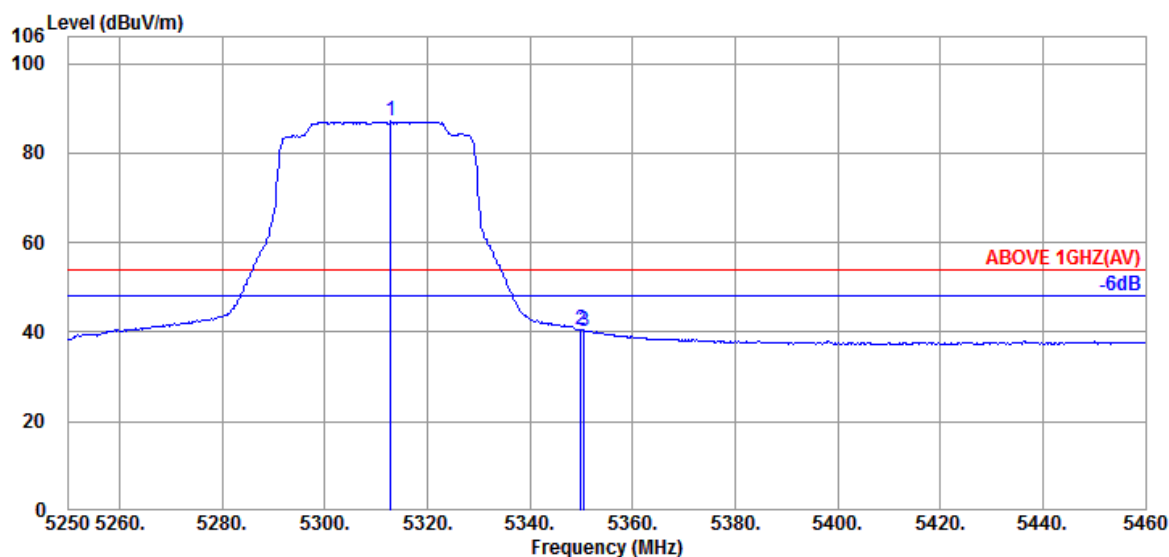

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5312.790	34.60	10.81	34.33	75.93	87.01	---	---	Average
	5349.960	34.60	10.83	34.31	29.49	40.61	54.00	13.80	Average
	5350.590	34.60	10.83	34.31	29.17	40.29	54.00	13.70	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM2010181

Report Number: EM-F200514


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ax-HE80	Band	NII-2C
RU Configuration	484/65	Frequency	TX 5530MHz

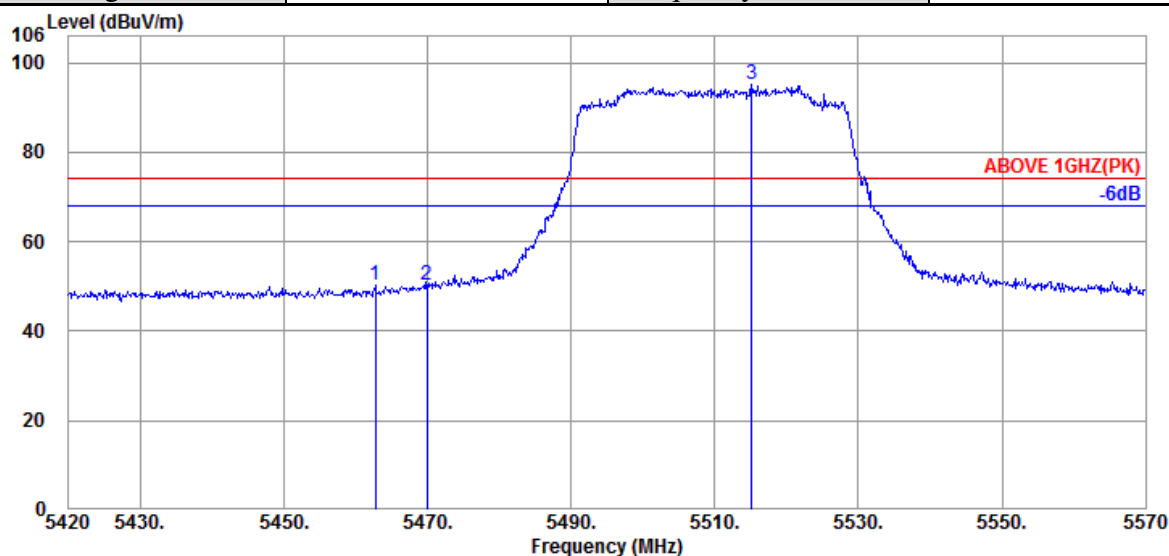

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.750	34.70	10.91	34.28	38.83	50.16	74.00	23.35	Peak
5469.950	34.67	10.91	34.28	38.96	50.26	74.00	27.05	Peak
@ 5515.100	34.60	10.93	34.28	83.78	95.03	---	---	Peak

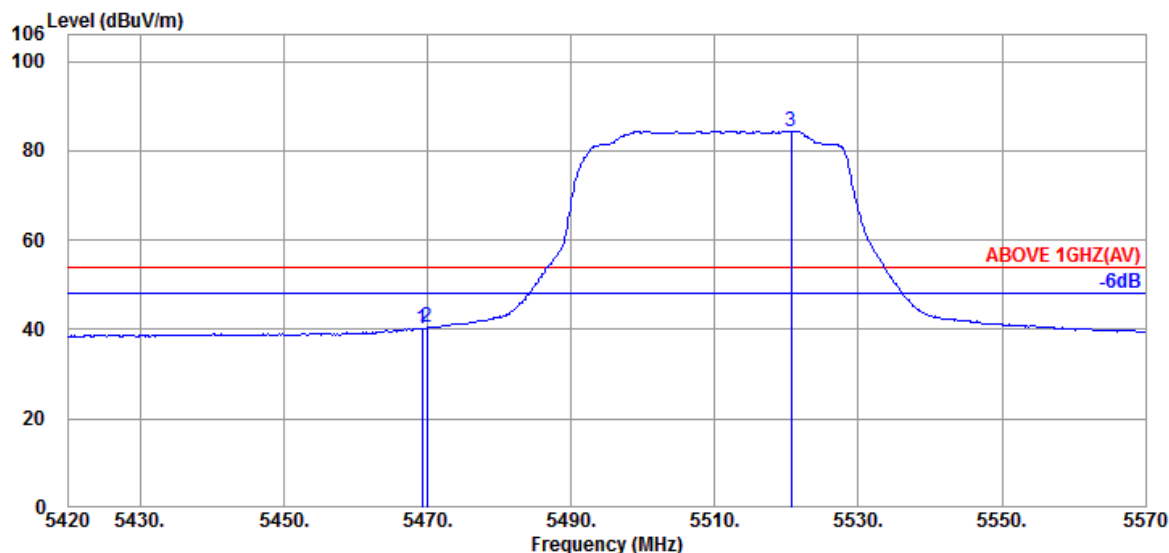

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.200	34.67	10.91	34.28	29.03	40.33	54.00	16.26	Average
5469.950	34.67	10.91	34.28	29.07	40.37	54.00	16.25	Average
@ 5520.650	34.60	10.93	34.28	73.16	84.41	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	UNII Band	NII-2C
RU Configuration	484/65	Frequency	TX 5530MHz

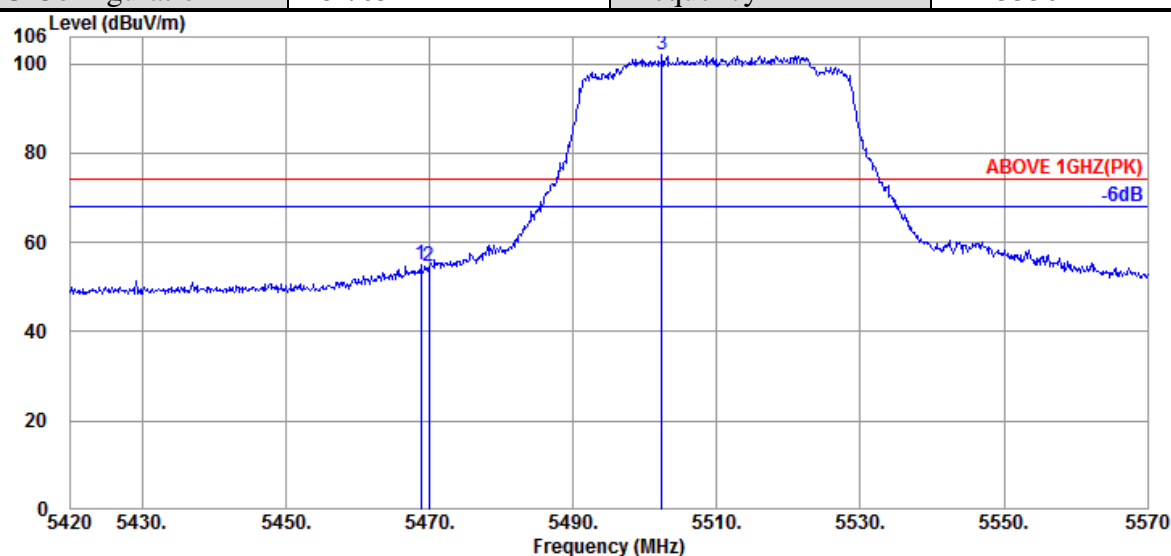

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.750	34.67	10.91	34.28	43.58	54.88	74.00	16.06	Peak
5469.950	34.67	10.91	34.28	43.47	54.77	74.00	19.49	Peak
@ 5502.350	34.60	10.93	34.27	90.73	101.99	---	---	Peak

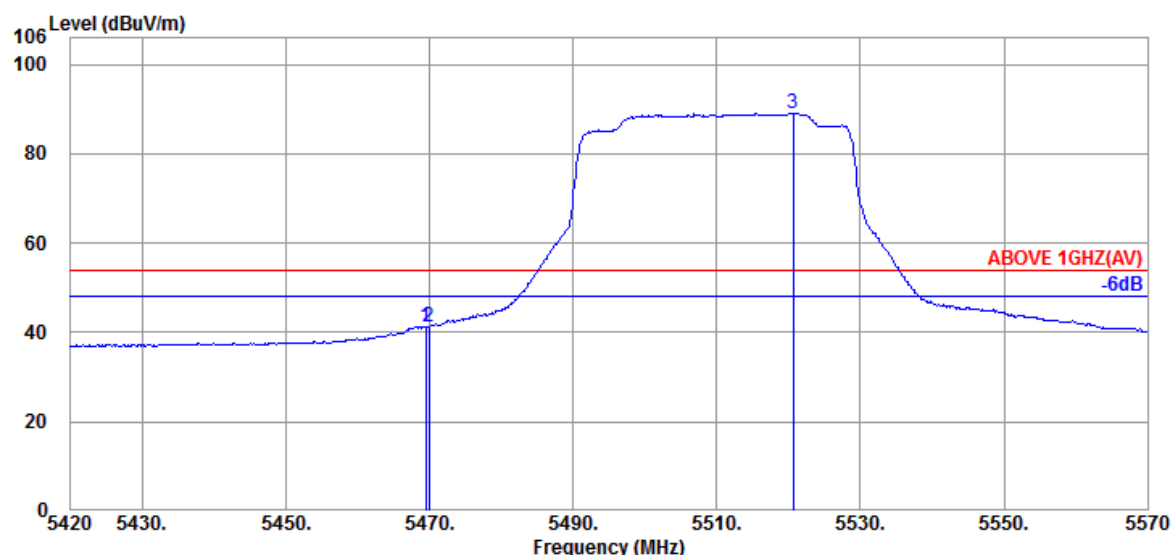

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.500	34.67	10.91	34.28	30.06	41.36	54.00	13.67	Average
5469.950	34.67	10.91	34.28	30.05	41.35	54.00	13.73	Average
@ 5520.650	34.60	10.93	34.28	77.78	89.03	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM2010181

Report Number: EM-F200514

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	UNII Band	NII-2C
RU Configuration	484/66	Frequency	TX 5610MHz

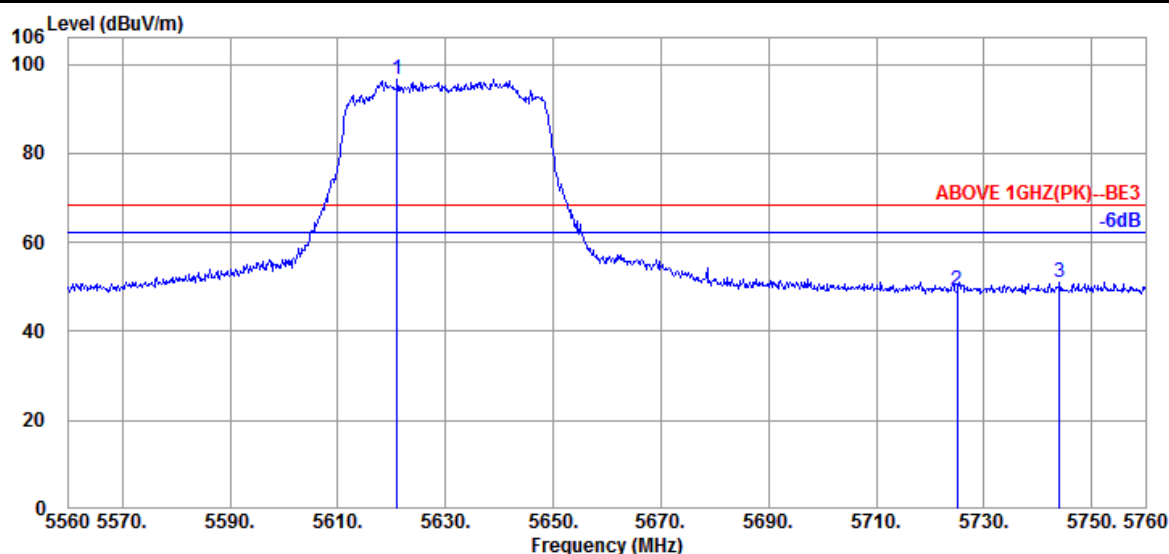

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5621.000	34.60	10.99	34.33	85.25	---	---	Peak
5725.000	34.80	11.05	34.37	37.65	68.20	5.99	Peak
5744.000	34.80	11.05	34.38	39.53	68.20	2.60	Peak

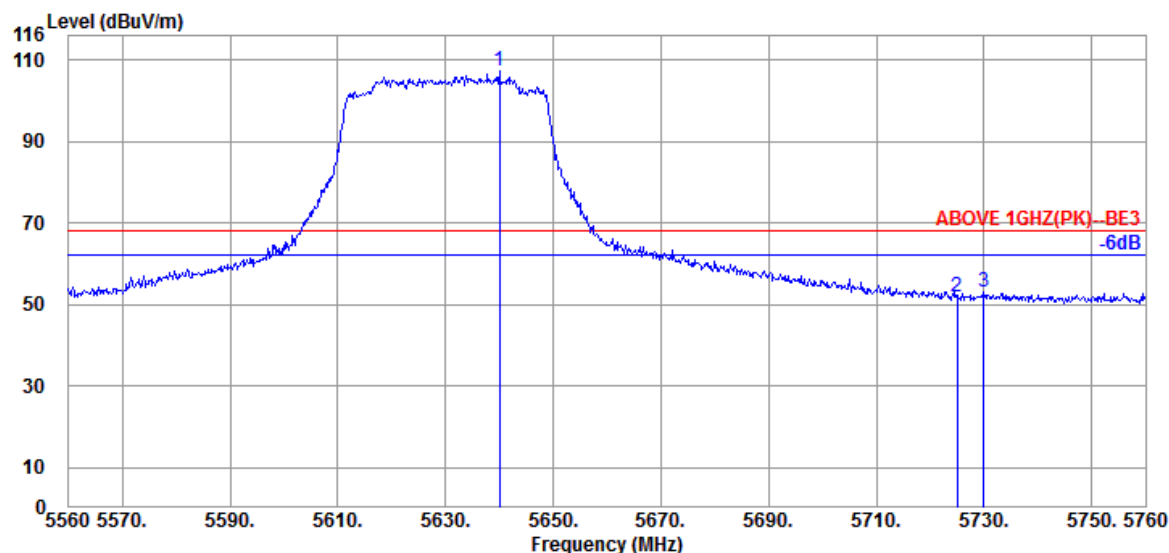

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5640.000	34.60	11.01	34.34	96.07	---	---	Peak
5725.000	34.80	11.05	34.37	40.49	68.20	11.24	Peak
5730.000	34.80	11.05	34.38	41.77	68.20	9.50	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.


File Number: CIM2010181

Report Number: EM-F200514


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ax-HE80	Band	NII-III
RU Configuration	484/65	Frequency	TX 5775MHz

Antenna at Horizontal Polarization

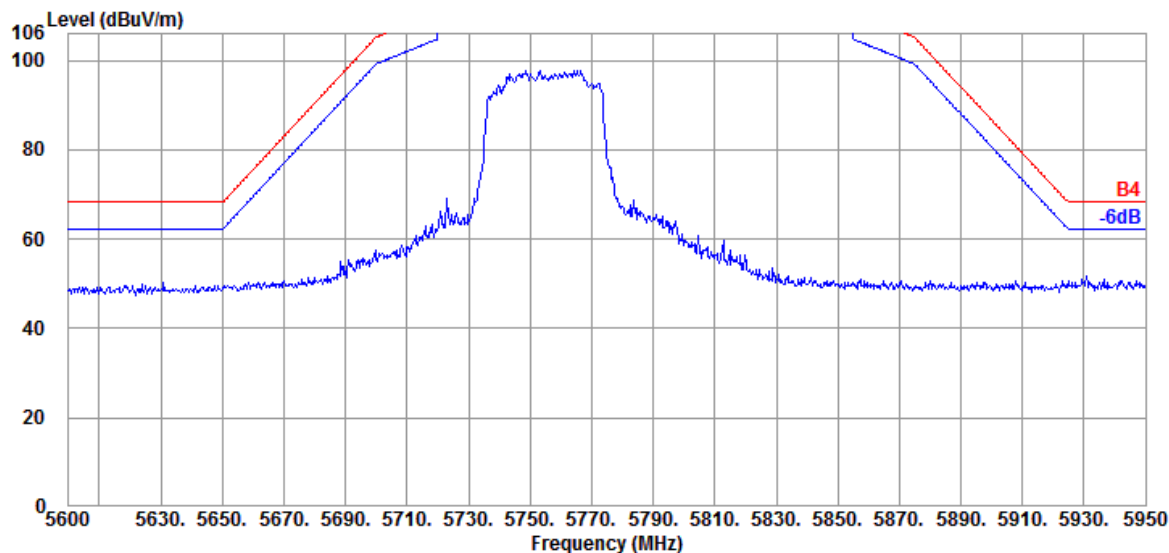

Antenna at Vertical Polarization

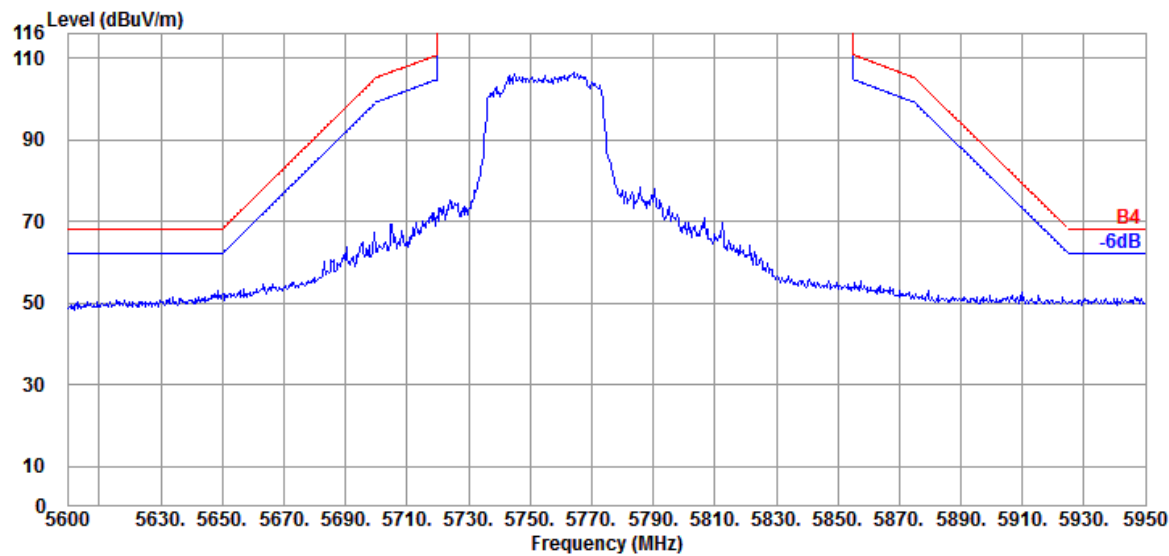


Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	Band	NII-III
RU Configuration	484/66	Frequency	TX 5775MHz


Antenna at Horizontal Polarization

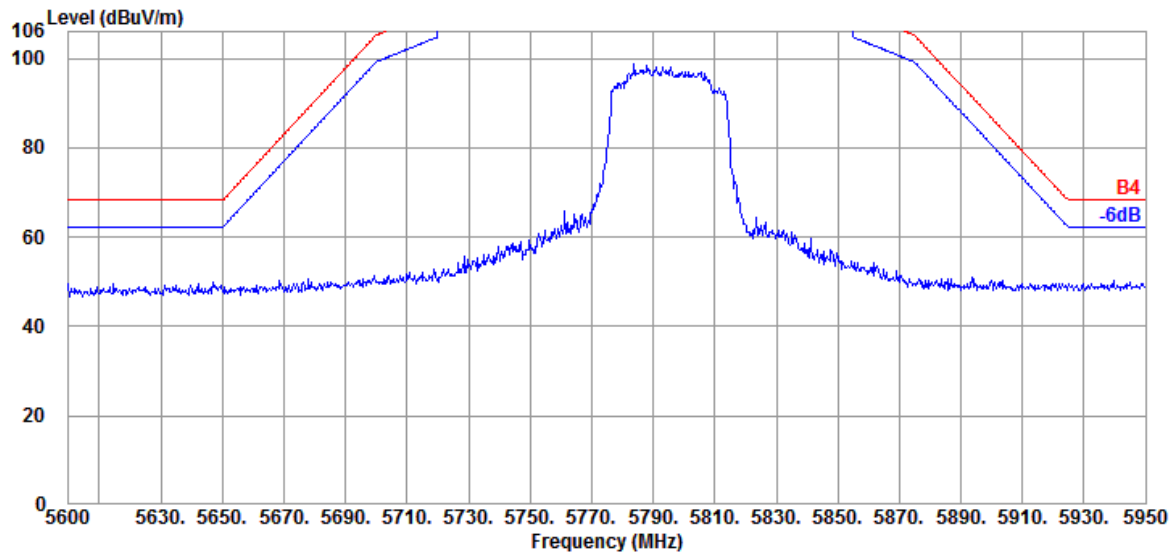

Antenna at Vertical Polarization

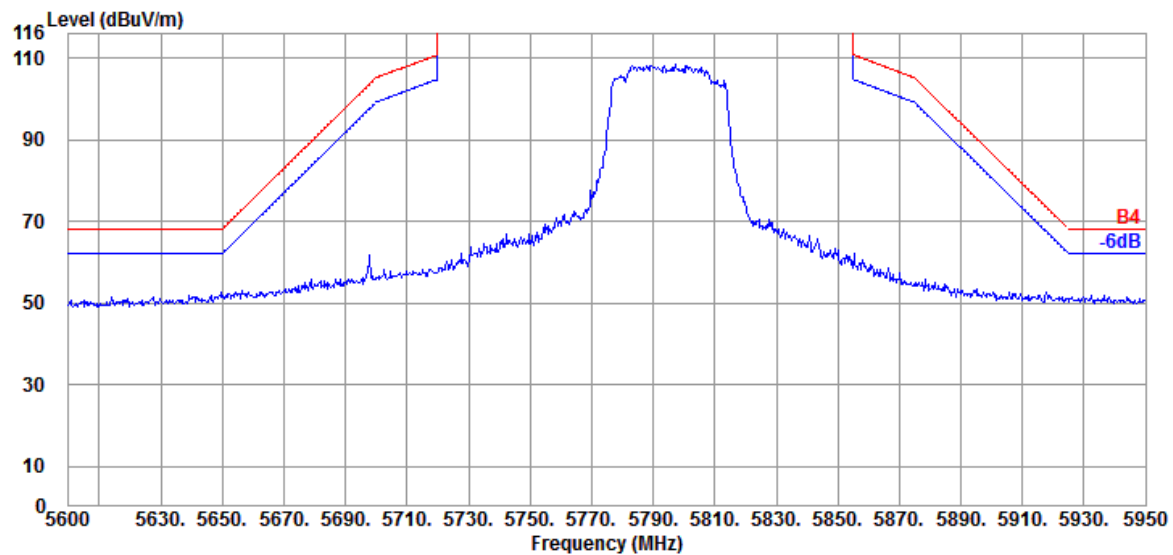


Mode	802.11ax-HE160	Band	NII-I & NII-2A
RU Configuration	996/67	Frequency	TX 5250MHz

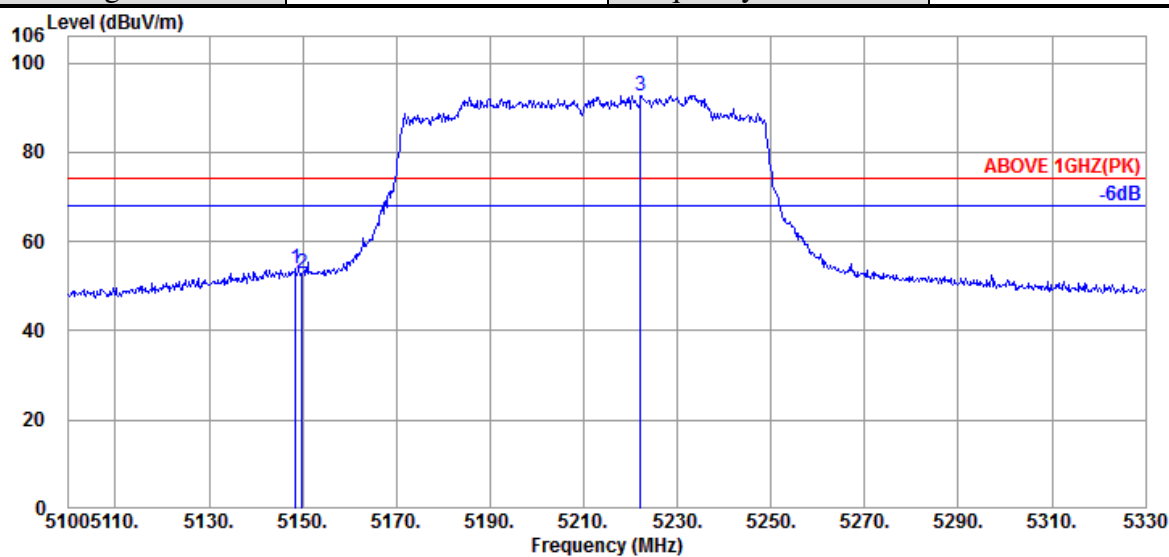

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.530	34.40	10.70	34.38	43.27	53.99	74.00	24.60	Peak
5149.910	34.40	10.70	34.38	41.97	52.69	74.00	26.60	Peak
@ 5222.130	34.50	10.76	34.36	81.82	92.72	---	---	Peak

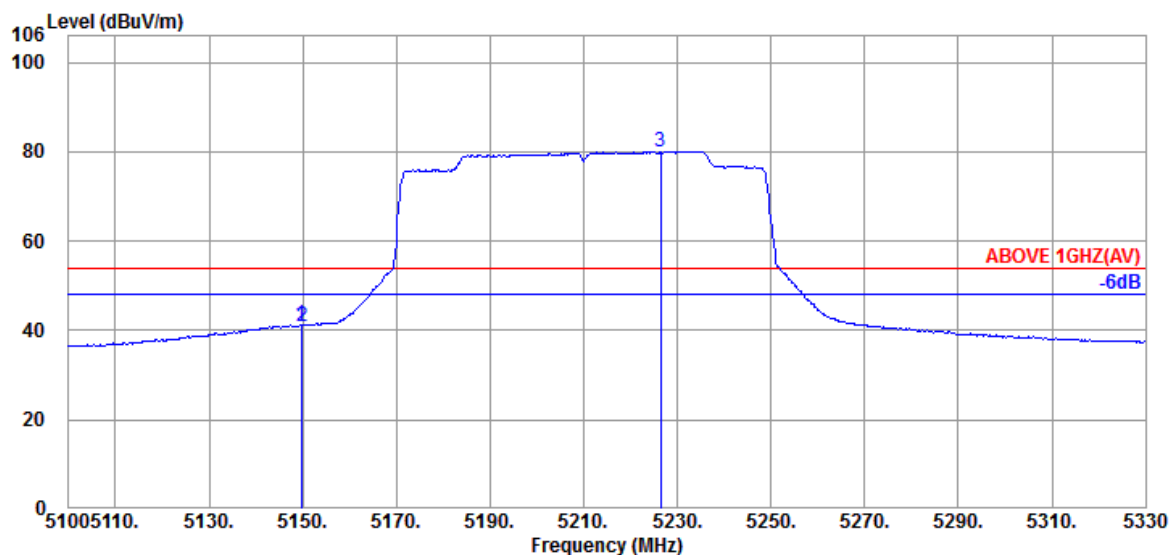


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.680	34.40	10.70	34.38	30.46	41.18	54.00	16.86	Average
5149.910	34.40	10.70	34.38	30.33	41.05	54.00	17.06	Average
@ 5226.500	34.50	10.76	34.35	69.21	80.12	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	UNII Band	I & NII-2A
RU Configuration	996/67	Frequency	TX 5250MHz

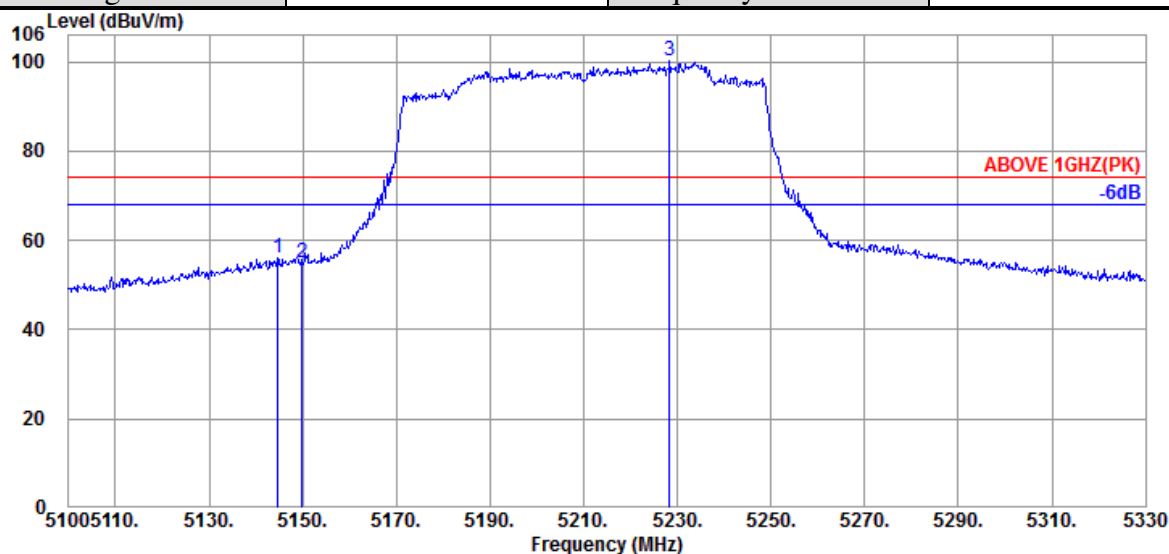

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.620	34.40	10.70	34.38	45.42	56.14	74.00	24.75	Peak
5149.910	34.40	10.70	34.38	44.17	54.89	74.00	26.81	Peak
@ 5228.340	34.50	10.76	34.35	89.16	100.07	---	---	Peak

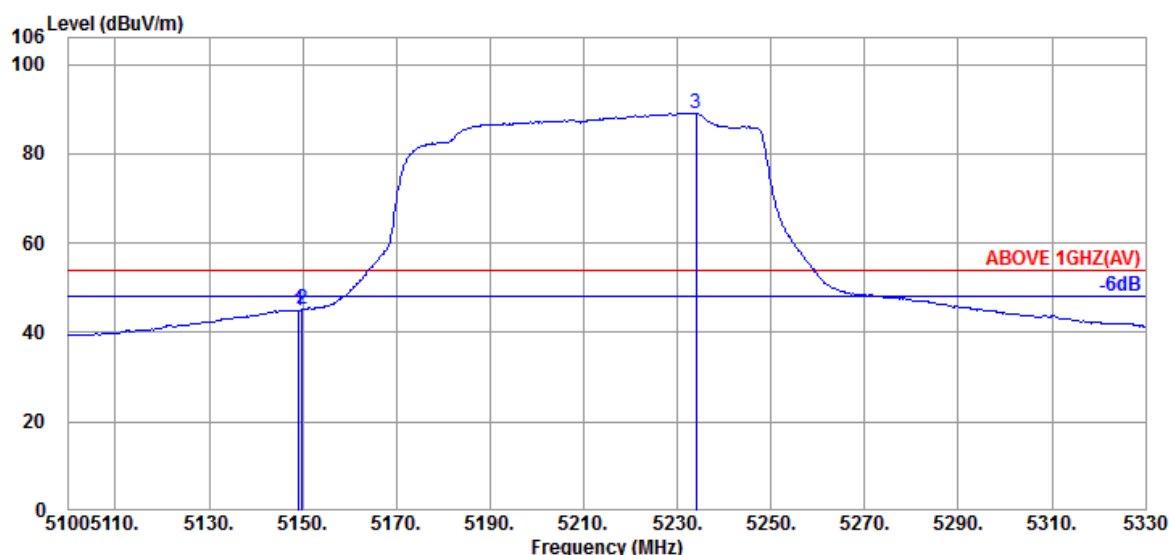

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.220	34.40	10.70	34.38	34.29	45.01	54.00	15.33	Average
5149.910	34.40	10.70	34.38	34.48	45.20	54.00	15.36	Average
@ 5234.090	34.50	10.76	34.35	78.16	89.07	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	Band	NII-I & NII-2A
RU Configuration	996/S67	Frequency	TX 5250MHz

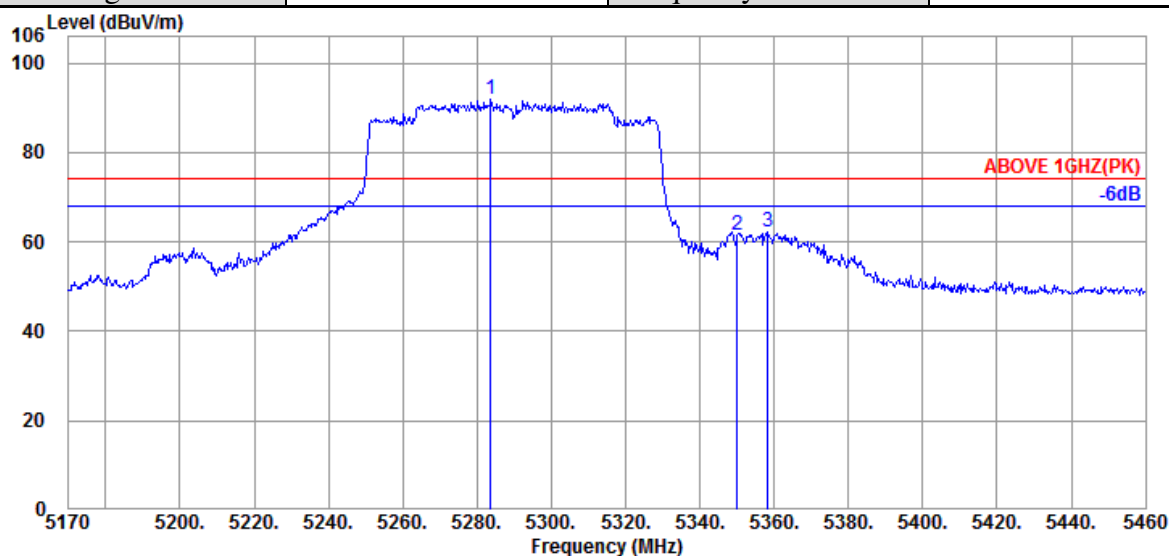

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5283.680	34.57	10.79	34.34	80.72	91.74	---	---	Peak
5350.090	34.60	10.83	34.31	50.28	61.40	74.00	26.95	Peak
5358.210	34.60	10.85	34.31	51.08	62.22	74.00	24.75	Peak

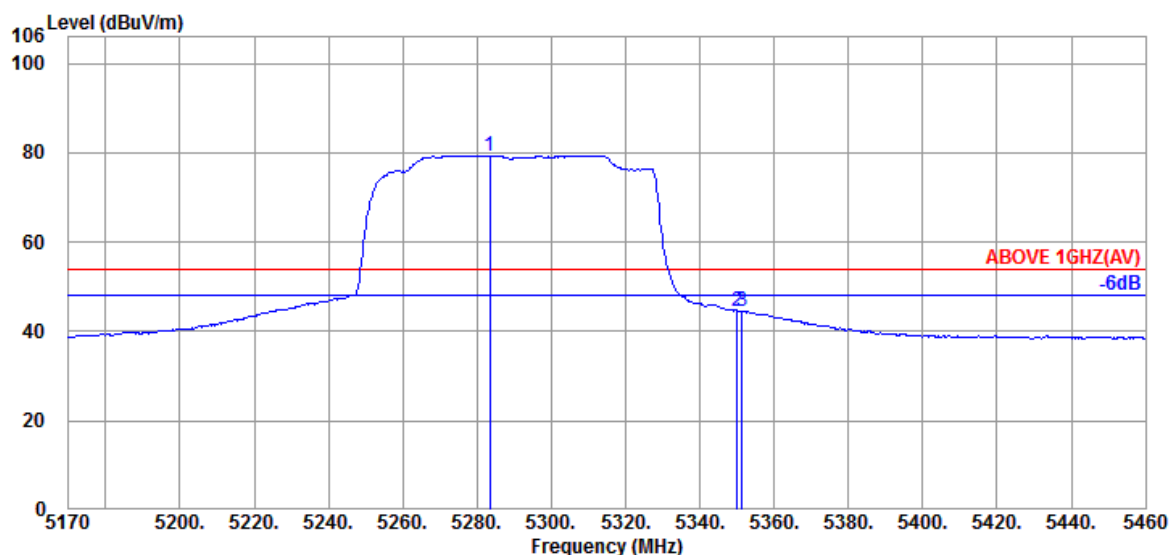

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5283.390	34.57	10.79	34.34	68.35	79.37	---	---	Average
5350.090	34.60	10.83	34.31	33.50	44.62	54.00	16.98	Average
5351.250	34.60	10.83	34.31	33.50	44.62	54.00	16.32	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM2010181

Report Number: EM-F200514


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ax-HE160	UNII Band	I & NII-2A
RU Configuration	996/S67	Frequency	TX 5250MHz

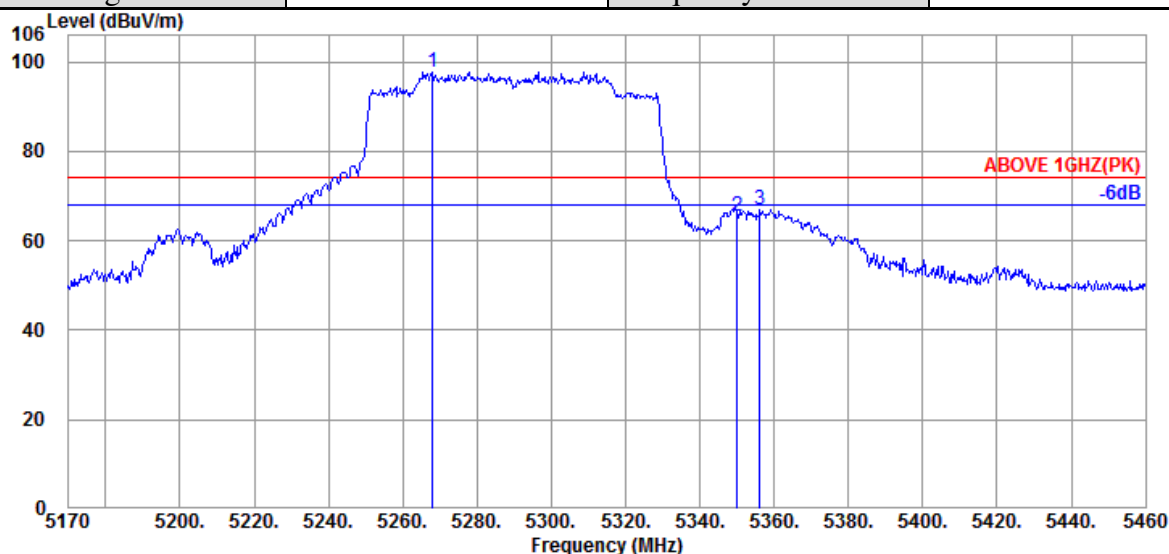

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5268.020	34.53	10.79	34.34	86.79	97.77	---	---	Peak
5350.090	34.60	10.83	34.31	54.38	65.50	74.00	27.15	Peak
5356.180	34.60	10.85	34.31	55.70	66.84	74.00	24.17	Peak

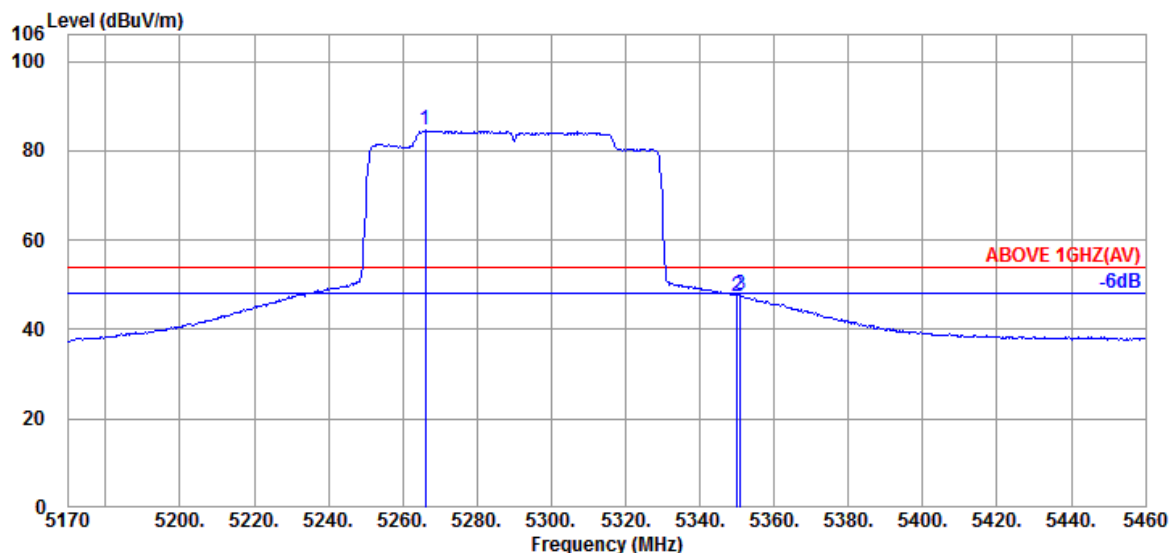

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5265.990	34.53	10.79	34.34	73.51	84.49	---	---	Average
5350.090	34.60	10.83	34.31	36.34	47.46	54.00	15.63	Average
5350.960	34.60	10.83	34.31	36.49	47.61	54.00	15.36	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	UNII Band	NII-2C
RU Configuration	996/67	Frequency	TX 5570MHz

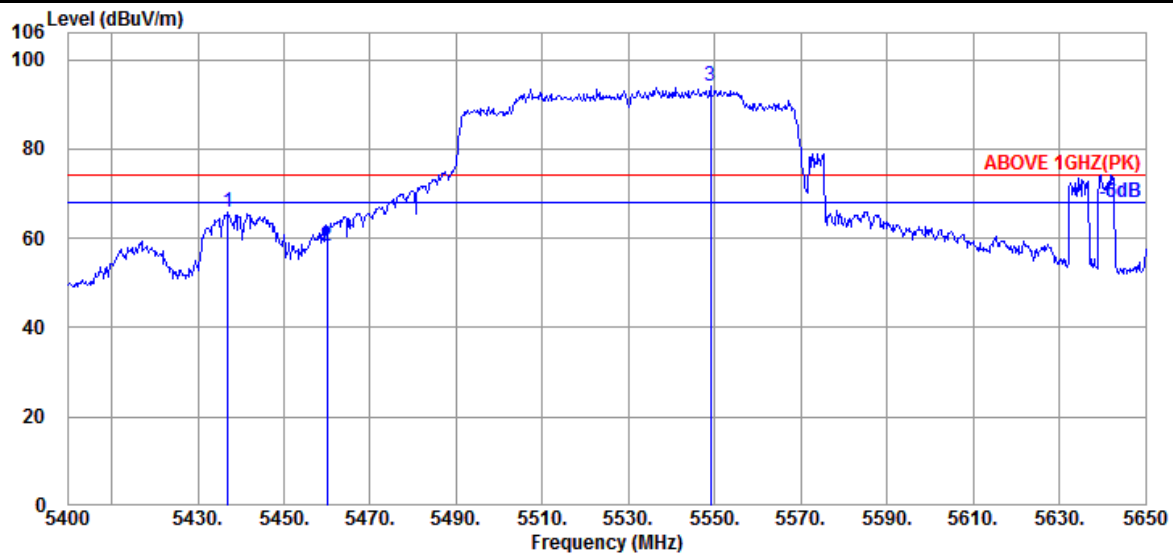

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5437.000	34.67	10.89	34.29	54.42	65.69	74.00	25.05	Peak
5460.000	34.70	10.91	34.28	46.82	58.15	74.00	26.26	Peak
@ 5549.000	34.60	10.95	34.30	82.98	94.23	---	---	Peak

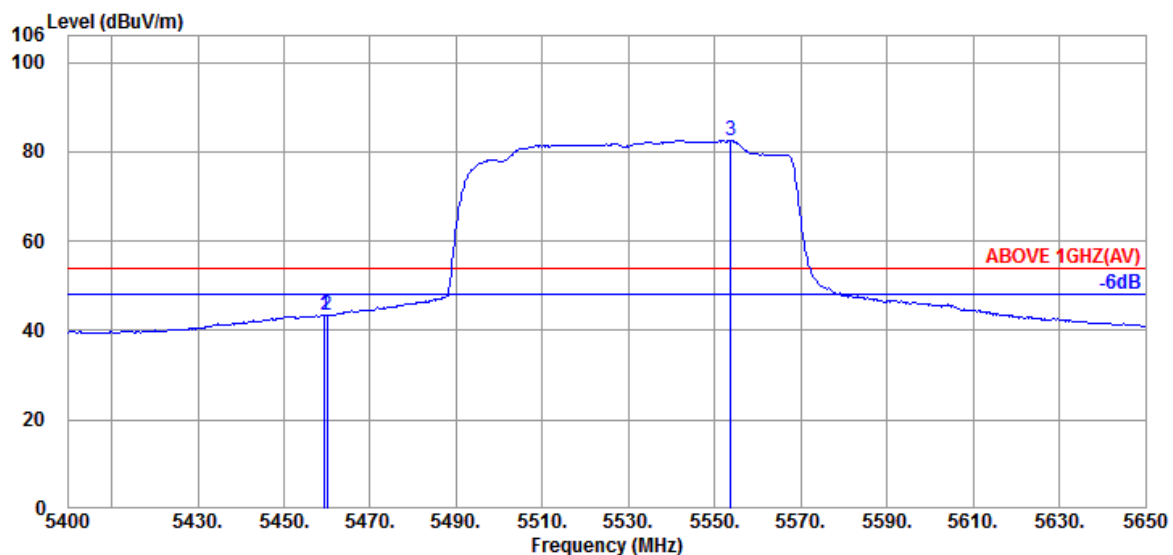

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.500	34.70	10.91	34.28	32.23	43.56	54.00	16.20	Average
5460.000	34.70	10.91	34.28	32.12	43.45	54.00	16.35	Average
@ 5553.750	34.60	10.95	34.30	71.29	82.54	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	UNII Band	NII-2C
RU Configuration	996/67	Frequency	TX 5570MHz

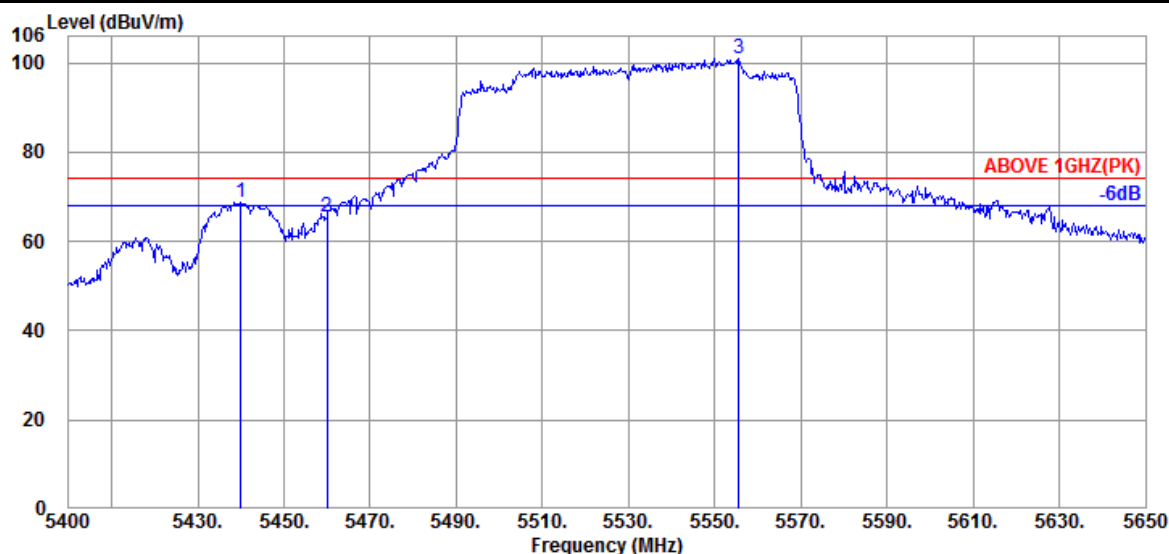

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5440.000	34.67	10.89	34.29	57.34	68.61	74.00	23.88	Peak
5460.000	34.70	10.91	34.28	54.02	65.35	74.00	24.31	Peak
@ 5555.500	34.60	10.95	34.30	89.85	101.10	---	---	Peak

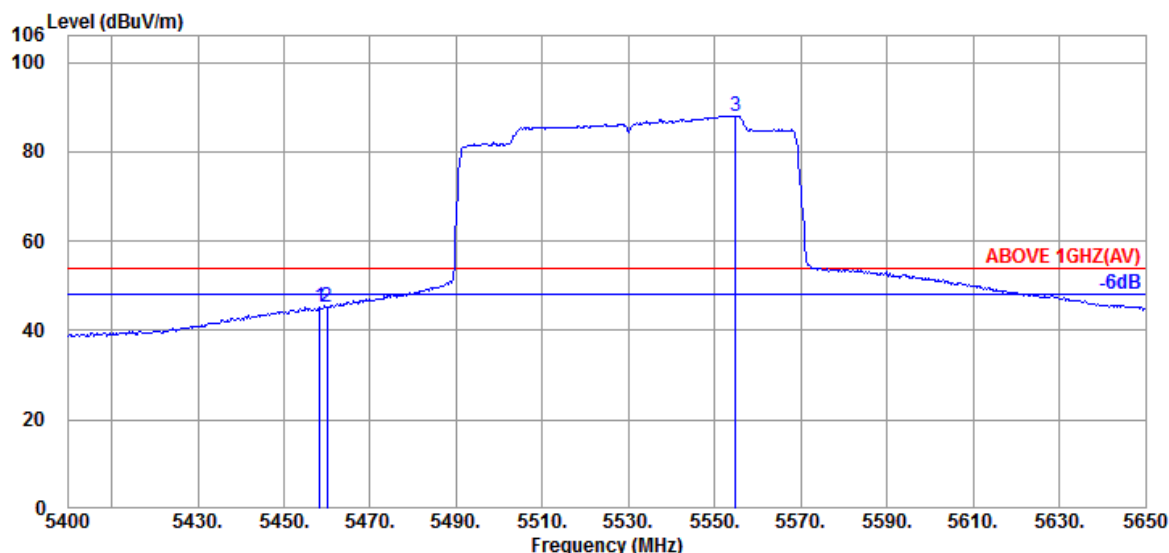

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.250	34.70	10.89	34.28	33.90	45.21	54.00	14.03	Average
5460.000	34.70	10.91	34.28	33.88	45.21	54.00	14.07	Average
@ 5554.750	34.60	10.95	34.30	76.79	88.04	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM2010181


Report Number: EM-F200514

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	UNII Band	NII-2C
RU Configuration	996/S67	Frequency	TX 5570MHz

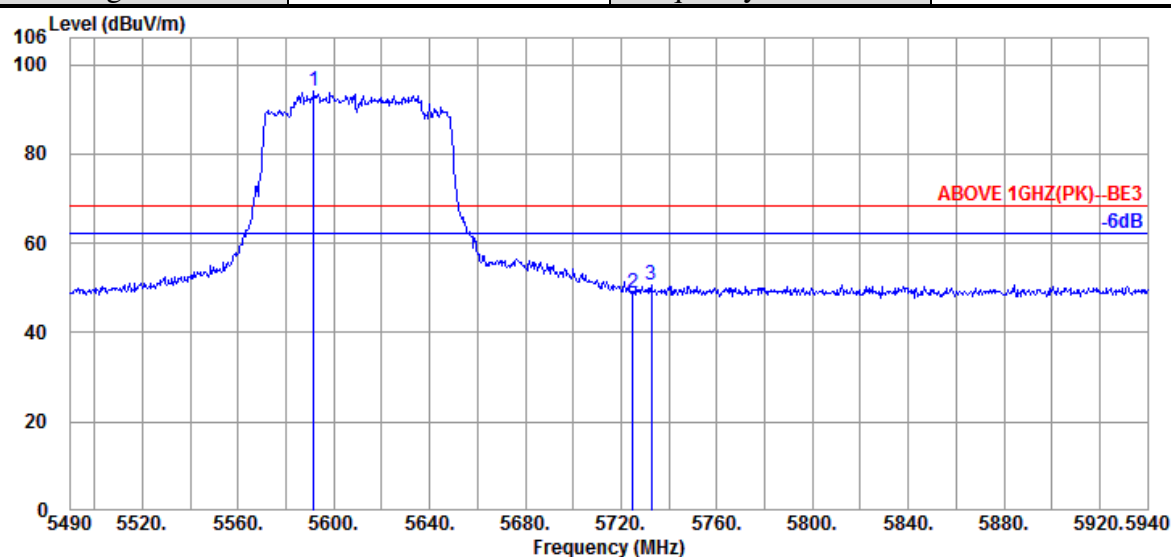

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5591.700	34.60	10.97	34.31	82.84	94.10	---	---	Peak
	5724.900	34.80	11.05	34.37	37.37	48.85	68.20	22.54	Peak
	5732.550	34.80	11.05	34.38	39.12	50.59	68.20	19.18	Peak

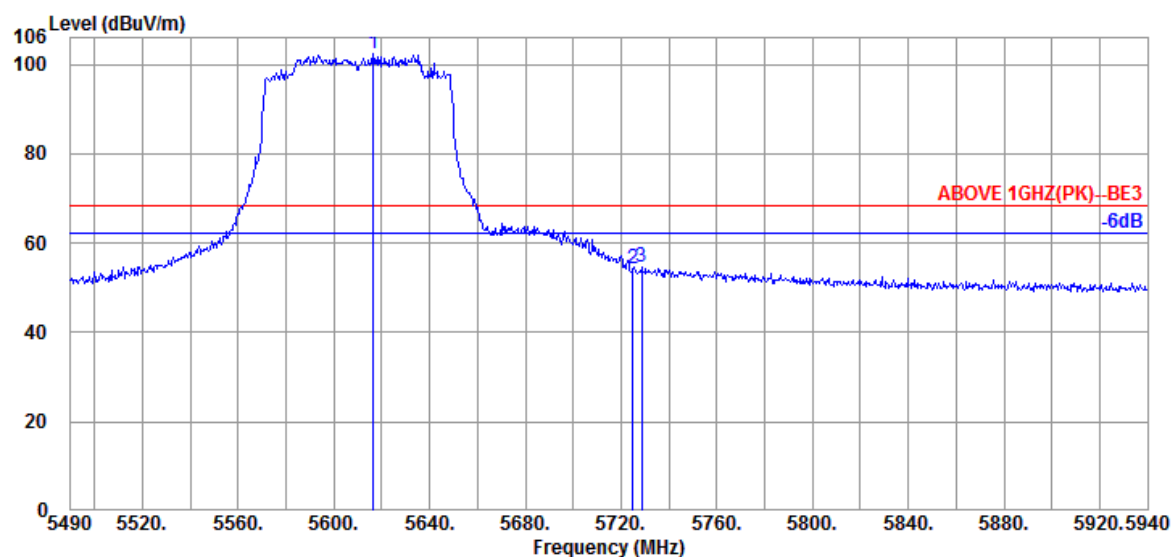

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5616.450	34.60	10.99	34.33	91.04	102.30	---	---	Peak
	5724.900	34.80	11.05	34.37	42.96	54.44	68.20	20.50	Peak
	5728.500	34.80	11.05	34.38	42.99	54.46	68.20	18.66	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

A.2.2 Emissions outside the frequency band

The emissions (up to 40GHz) not reported for there is no emission be found.

Mode	802.11a	Band	NII-I
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	37.70	14.94	34.75	31.34	49.23	54.00	4.77	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	37.70	14.94	34.75	32.54	50.43	54.00	3.57	Peak

Mode	802.11a	Band	NII-2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	37.70	14.98	34.72	30.82	48.78	54.00	5.22	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	37.70	14.98	34.72	31.90	49.86	54.00	4.14	Peak

Mode	802.11a	Band	NII-2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.00	15.36	34.61	31.61	50.36	54.00	3.64	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.00	15.36	34.61	33.15	51.90	54.00	2.10	Peak

Mode	802.11a	Band	NII-2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.23	15.59	34.64	30.44	49.62	54.00	4.38	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.23	15.59	34.64	32.32	51.50	54.00	2.50	Peak

Mode	802.11a	Band	NII-III
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	38.37	15.71	34.65	24.41	43.84	54.00	10.16	Average
11570.000	38.37	15.71	34.65	32.84	52.27	74.00	21.73	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	38.37	15.71	34.65	25.00	44.43	54.00	9.57	Average
11570.000	38.37	15.71	34.65	34.99	54.42	74.00	19.58	Peak

Mode	802.11n-HT20	Band	NII-I
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	37.70	14.94	34.75	30.85	48.74	54.00	5.26	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	37.70	14.94	34.75	31.77	49.66	54.00	4.34	Peak

Mode	802.11n-HT20	Band	NII-2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	37.70	14.98	34.72	30.88	48.84	54.00	5.16	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	37.70	14.98	34.72	31.07	49.03	54.00	4.97	Peak

Mode	802.11n-HT20	Band	NII-2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.00	15.36	34.61	30.09	48.84	54.00	5.16	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.00	15.36	34.61	31.27	50.02	54.00	3.98	Peak

Mode	802.11n-HT20	Band	NII-2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.23	15.59	34.64	30.87	50.05	54.00	3.95	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.23	15.59	34.64	31.28	50.46	54.00	3.54	Peak

Mode	802.11n-HT20	Band	NII-III
		Frequency	TX 5785MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	38.37	15.71	34.65	29.92	49.35	54.00	4.65	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	38.37	15.71	34.65	30.07	49.50	54.00	4.50	Peak

Mode	802.11n-HT40	Band	NII-I
		Frequency	TX 5230MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	37.70	14.94	34.78	31.21	49.07	54.00	4.93	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	37.70	14.94	34.78	31.68	49.54	54.00	4.46	Peak

Mode	802.11n-HT40	Band	NII-2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	37.73	14.98	34.71	31.36	49.36	54.00	4.64	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	37.73	14.98	34.71	32.18	50.18	54.00	3.82	Peak

Mode	802.11n-HT40	Band	NII-2C
		Frequency	TX 5670MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.13	15.53	34.62	29.74	48.78	54.00	5.22	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.13	15.53	34.62	30.13	49.17	54.00	4.83	Peak

Mode	802.11n-HT40	Band	NII-2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.23	15.59	34.63	30.54	49.73	54.00	4.27	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.23	15.59	34.63	30.74	49.93	54.00	4.07	Peak

Mode	802.11n-HT40	Band	NII-III
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	38.40	15.71	34.65	30.87	50.33	54.00	3.67	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	38.40	15.71	34.65	30.87	50.33	54.00	3.67	Peak

Mode	802.11ac-VHT80	Band	NII-I
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	37.70	14.94	34.81	31.55	49.38	54.00	4.62	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	37.70	14.94	34.81	32.24	50.07	54.00	3.93	Peak

Mode	802.11ac-VHT80	Band	NII-2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	37.77	15.02	34.70	30.77	48.86	54.00	5.14	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	37.77	15.02	34.70	30.81	48.90	54.00	5.10	Peak

Mode	802.11ac-VHT80	Band	NII-2C
		Frequency	TX 5610MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.00	15.42	34.61	31.20	50.01	54.00	3.99	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.00	15.42	34.61	30.98	49.79	54.00	4.21	Peak

Audix Technology Corp.

No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11ac-VHT80	Band	NII-2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.17	15.53	34.63	31.01	50.08	54.00	3.92	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.17	15.53	34.63	30.12	49.19	54.00	4.81	Peak

Mode	802.11ac-VHT80	Band	NII-III
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.33	15.71	34.65	29.25	48.64	54.00	5.36	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.33	15.71	34.65	29.42	48.81	54.00	5.19	Peak

Mode	802.11ac-VHT160	Band	I/NII-2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	37.70	14.98	34.72	31.13	49.09	54.00	4.91	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	37.70	14.98	34.72	31.20	49.16	54.00	4.84	Peak

Mode	802.11ac-VHT160	Band	NII-2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.00	15.36	34.61	30.67	49.42	54.00	4.58	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.00	15.36	34.61	31.17	49.92	54.00	4.08	Peak

Mode	802.11ax-HE20	Band	NII-I
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	37.70	14.94	34.75	31.30	49.19	54.00	4.81	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	37.70	14.94	34.75	31.12	49.01	54.00	4.99	Peak

Mode	802.11ax-HE20	Band	NII-2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	37.70	14.98	34.72	30.97	48.93	54.00	5.07	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10520.000	37.70	14.98	34.72	31.51	49.47	54.00	4.53	Peak

Mode	802.11ax-HE20	Band	NII-2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.00	15.36	34.61	30.50	49.25	54.00	4.75	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	38.00	15.36	34.61	31.33	50.08	54.00	3.92	Peak

Mode	802.11ax-HE20	Band	NII-2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.23	15.59	34.64	30.86	50.04	54.00	3.96	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	38.23	15.59	34.64	31.52	50.70	54.00	3.30	Peak

Mode	802.11ax-HE20	Band	NII-III
		Frequency	TX 5785MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	38.37	15.71	34.65	29.74	49.17	54.00	4.83	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	38.37	15.71	34.65	30.15	49.58	54.00	4.42	Peak

Mode	802.11ax-HE40	Band	NII-I
		Frequency	TX 5230MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	37.70	14.94	34.78	30.84	48.70	54.00	5.30	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10460.000	37.70	14.94	34.78	30.86	48.72	54.00	5.28	Peak

Mode	802.11ax-HE40	Band	NII-2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	37.73	14.98	34.71	30.90	48.90	54.00	5.10	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	37.73	14.98	34.71	32.24	50.24	54.00	3.76	Peak

Mode	802.11ax-HE40	Band	NII-2C
		Frequency	TX 5670MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.13	15.53	34.62	30.01	49.05	54.00	4.95	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11340.000	38.13	15.53	34.62	30.78	49.82	54.00	4.18	Peak

Mode	802.11ax-HE40	Band	NII-2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.23	15.59	34.63	29.76	48.95	54.00	5.05	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	38.23	15.59	34.63	30.70	49.89	54.00	4.11	Peak

Mode	802.11ax-HE40	Band	NII-III
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	38.40	15.71	34.65	30.03	49.49	54.00	4.51	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11590.000	38.40	15.71	34.65	30.64	50.10	54.00	3.90	Peak

Mode	802.11ax-HE80	Band	NII-I
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	37.70	14.94	34.81	31.48	49.31	54.00	4.69	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	37.70	14.94	34.81	30.85	48.68	54.00	5.32	Peak

Mode	802.11ax-HE80	Band	NII-2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	37.77	15.02	34.70	30.38	48.47	54.00	5.53	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	37.77	15.02	34.70	31.33	49.42	54.00	4.58	Peak

Mode	802.11ax-HE80	Band	NII-2C
		Frequency	TX 5610MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.00	15.42	34.61	30.68	49.49	54.00	4.51	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11220.000	38.00	15.42	34.61	31.48	50.29	54.00	3.71	Peak

Mode	802.11ax-HE80	Band	NII-2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.17	15.53	34.63	29.89	48.96	54.00	5.04	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	38.17	15.53	34.63	30.43	49.50	54.00	4.50	Peak

Mode	802.11ax-HE80	Band	NII-III
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.33	15.71	34.65	30.56	49.95	54.00	4.05	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	38.33	15.71	34.65	30.10	49.49	54.00	4.51	Peak

Mode	802.11ax-HE160	Band	NII-I/NII-2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	37.70	14.98	34.72	30.82	48.78	54.00	5.22	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	37.70	14.98	34.72	30.43	48.39	54.00	5.61	Peak

Mode	802.11ax-HE160	Band	NII-2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.00	15.36	34.61	30.92	49.67	54.00	4.33	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	38.00	15.36	34.61	31.59	50.34	54.00	3.66	Peak

A.2.3 Emissions in Non-restricted Frequency Bands

Pursuant to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 that emission levels below the 15.209 general radiated emissions limits is not required.

A.3 26dB/6dB BANDWIDTH

Test Date	2019/09/23~10/3	Temp./Hum.	24°C/57%
Cable Loss	1dB	Tested By	Martin Chen
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

A.3.1 26dB/6dB Bandwidth Result

● For 26dB Bandwidth

Mode	Band	Centre Frequency (MHz)	26dB Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz) (Reference only)	Limit
802.11a	NII-I	5180	22.81	16.805	Reference only
		5200	22.97	16.807	
		5240	23.88	16.796	
	NII-2A	5260	23.28	16.823	
		5300	22.95	16.805	
		5320	22.65	16.803	
	NII-2C	5500	23.54	16.807	
		5580	23.23	16.767	
		5700	23.08	16.870	
		5720	23.04	16.830	
802.11n-HT20	NII-I	5180	23.71	17.979	Reference only
		5200	23.62	17.944	
		5240	23.07	18.056	
	NII-2A	5260	23.53	17.940	
		5300	23.70	17.984	
		5320	23.51	17.953	
	NII-2C	5500	23.87	18.008	
		5580	25.08	17.995	
		5700	24.13	17.941	
		5720	24.57	18.035	

Mode	Band	Centre Frequency (MHz)	26dB Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz) (Reference only)	Limit
802.11n-HT40	NII-I	5190	43.90	36.525	Reference only
		5230	44.43	36.413	
	NII-2A	5270	44.39	36.422	
		5310	43.23	36.372	
	NII-2C	5510	43.15	36.419	
		5550	42.94	36.401	
		5670	43.38	36.409	
		5710	42.80	36.408	
802.11ac-VHT80	NII-I	5210	83.82	75.168	Reference only
	NII-2A	5290	84.27	75.078	
	NII-2C	5530	84.12	75.110	
		5610	83.55	75.154	
		5690	83.09	75.118	
802.11ac-VHT160	NII-I	5250	163.50	153.050	
	NII-2A				
	NII-2C	5570	162.60	153.080	

Mode	Band	Centre Frequency (MHz)	26dB Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz) (Reference only)	Limit
802.11ax-HE20	NII-I	5180	24.43	19.033	Reference only
		5200	23.80	19.067	
		5240	23.57	19.038	
	NII-2A	5260	23.66	19.099	
		5300	24.21	19.084	
		5320	23.91	19.124	
	NII-2C	5500	24.21	19.120	
		5580	23.15	19.073	
		5700	23.74	19.095	
		5720	23.95	19.073	
802.11ax-HE40	NII-I	5190	42.11	37.738	Reference only
		5230	42.47	37.818	
	NII-2A	5270	42.56	37.861	
		5310	43.47	37.854	
	NII-2C	5510	42.03	37.840	
		5550	42.74	37.768	
		5670	41.08	37.850	
		5710	42.61	37.787	
802.11ax-HE80	NII-I	5210	81.78	76.665	Reference only
	NII-2A	5290	81.97	76.571	
	NII-2C	5530	81.83	76.536	
		5610	81.00	76.499	
		5690	82.38	76.536	
802.11ax-HE160	NII-I	5250	162.50	154.730	Reference only
	NII-2A				
	NII-2C	5570	163.50	155.110	

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	Band	Centre Frequency (MHz)	RU Configuration	26dB Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz) (Reference only)	Limit
802.11ax-HE20	NII-I	5180	26/0	19.87	18.456	Reference only
			52/37	20.20	18.204	
			106/53	20.86	18.233	
	NII-2A	5320	26/8	20.14	18.518	
			52/40	21.49	18.158	
			106/54	20.57	17.889	
	NII-2C	5500	26/0	20.27	18.583	
			52/37	20.87	18.215	
			106/53	20.89	18.236	
		5700	26/8	19.65	18.236	
			52/40	21.11	18.404	
			106/54	21.62	18.220	
802.11ax-HE40	NII-I	5190	242/61	23.43	18.846	Reference only
	NII-2A	5310	242/62	25.43	18.771	
	NII-2C	5510	242/61	24.54	18.796	
		5670	242/62	23.92	18.841	
802.11ax-HE80	NII-I	5210	484/65	41.80	37.553	Reference only
	NII-2A	5290	484/66	40.97	37.466	
	NII-2C	5530	484/65	42.78	37.403	
		5610	484/66	41.89	37.561	
802.11ax-HE160	NII-I/ NII-2A	5250	996/67	81.81	76.779	
			996/S67	81.49	76.969	
	NII-2C	5570	996/67	81.68	76.461	
			996/S67	81.49	76.802	


● For 6dB Bandwidth


Mode	Band	Centre Frequency (MHz)	6dB Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz) (Reference only)	Limit
802.11a	NII-III	5745	16.39	16.597	≥ 500kHz
		5785	16.43	16.581	
		5825	16.38	16.571	
802.11n-HT20	NII-III	5745	17.60	17.747	
		5785	17.81	17.821	
		5825	17.79	17.798	
802.11n-HT40	NII-III	5755	36.38	36.296	
		5795	36.42	36.311	
802.11ac-VHT80	NII-III	5775	52.67	75.108	
802.11ax-HE20	NII-III	5745	19.00	19.012	
		5785	19.07	18.984	
		5825	18.34	19.010	
802.11ax-HE40	NII-III	5755	38.03	37.798	
		5795	37.75	37.775	
802.11ax-HE80	NII-III	5775	68.96	76.654	

Mode	Band	Centre Frequency (MHz)	RU Configuration	6dB Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz) (Reference only)	Limit
802.11ax-HE20	NII-III	5745	26/0	17.03	18.063	≥ 500kHz
			52/37	17.04	18.137	
			106/53	17.04	18.063	
	NII-III	5825	26/8	2.050	18.502	
			52/40	16.97	17.979	
			106/54	17.14	18.304	
802.11ax-HE40	NII-III	5755	242/61	18.89	18.803	
	NII-III	5795	242/62	18.74	18.805	
802.11ax-HE80	NII-III	5775	484/65	37.69	37.459	
			484/66	37.68	37.422	

A.3.2 Measurement Plots

- For 26dB Bandwidth

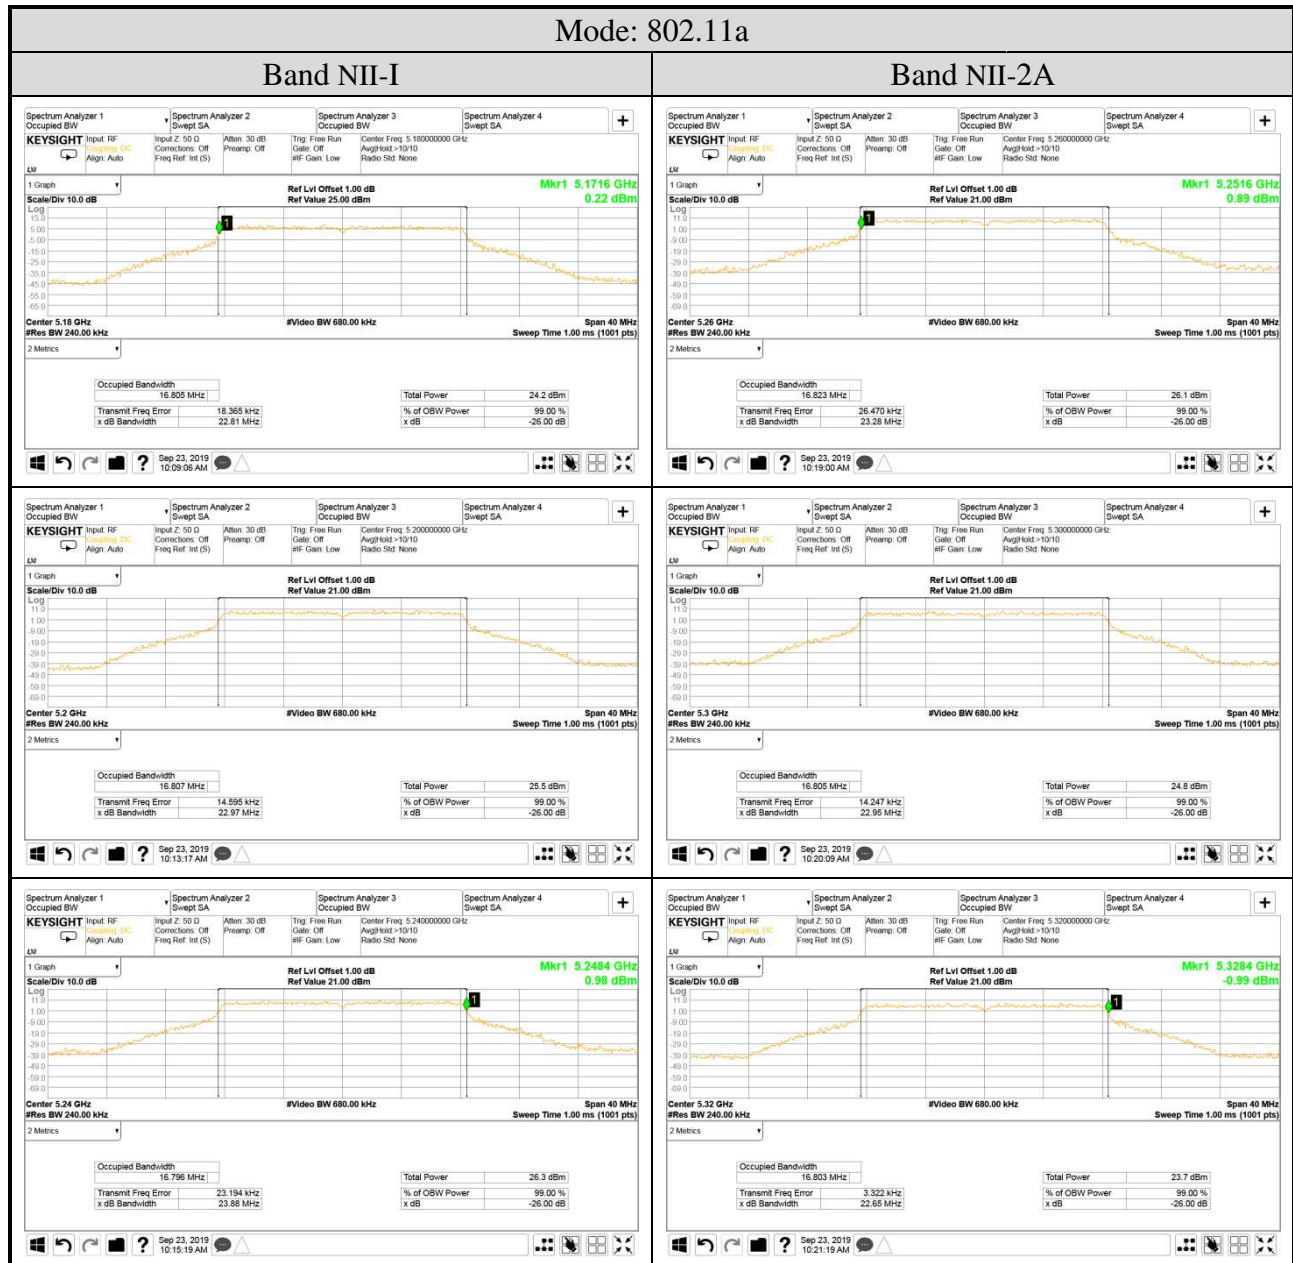



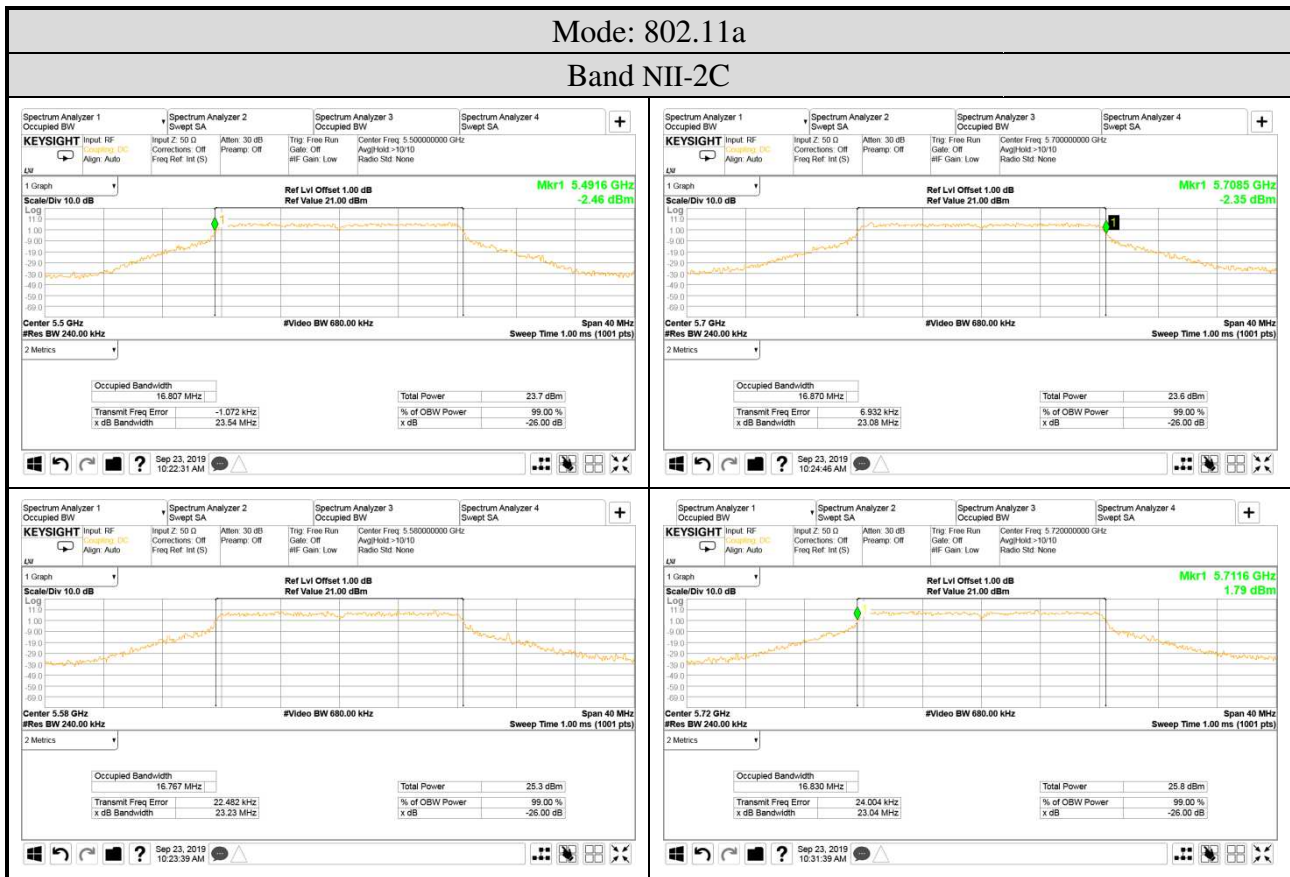



Mode: 802.11n-HT20

Band NII-I




Band NII-2A

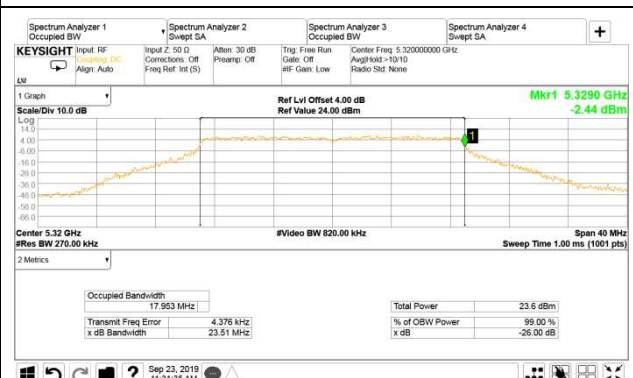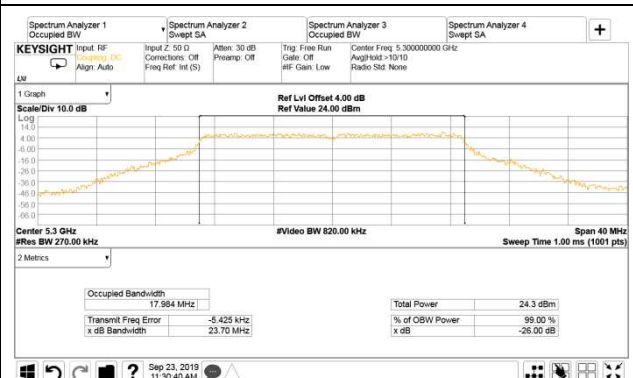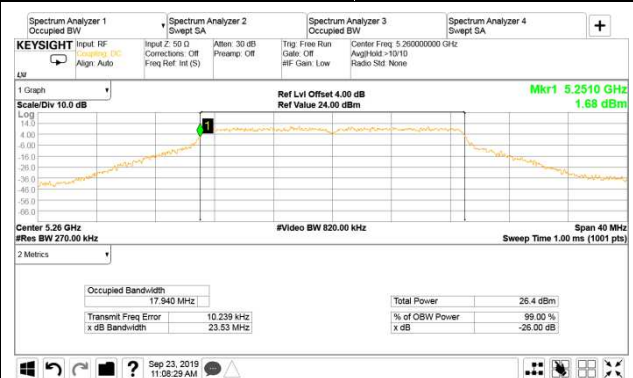



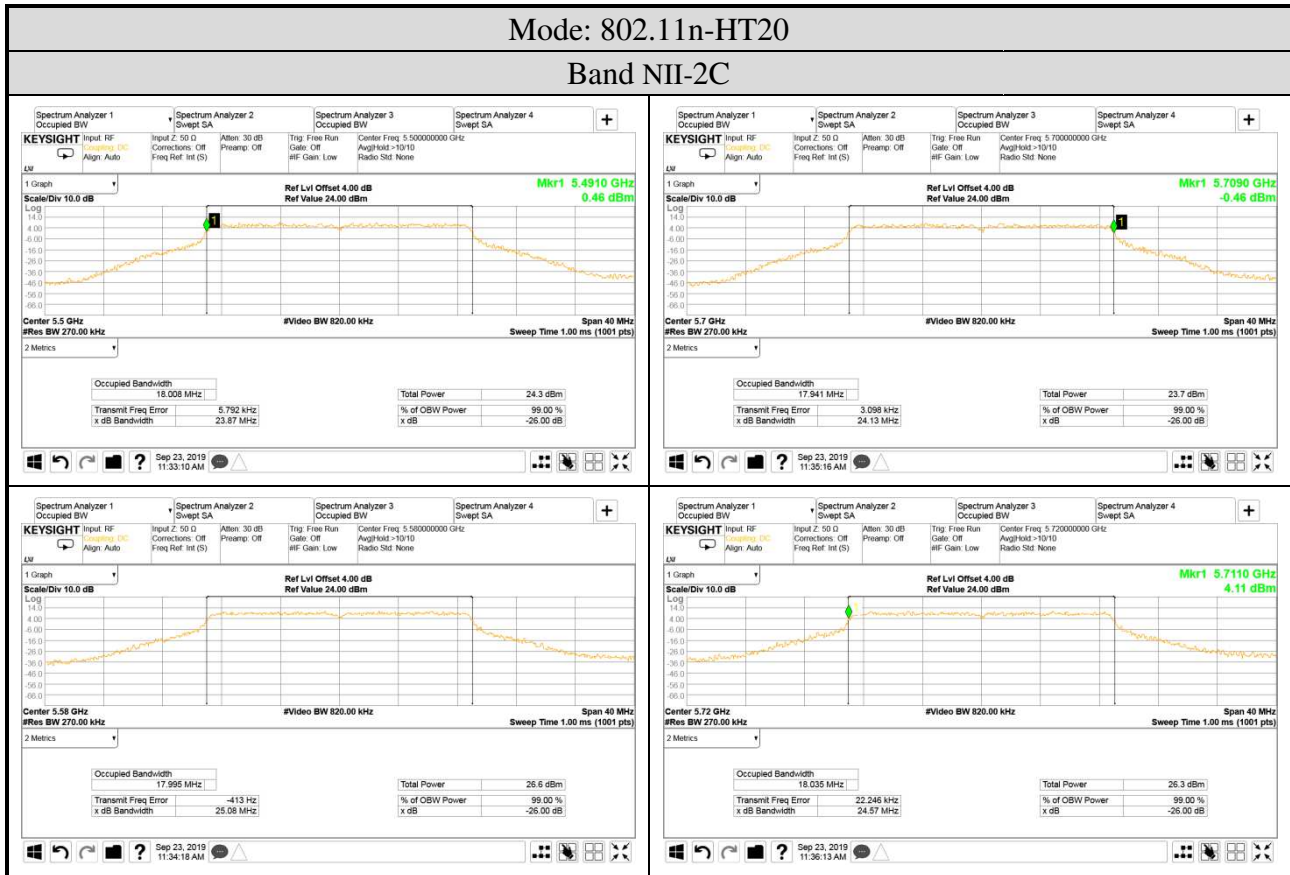


Mode: 802.11n-HT40

Band NII-1



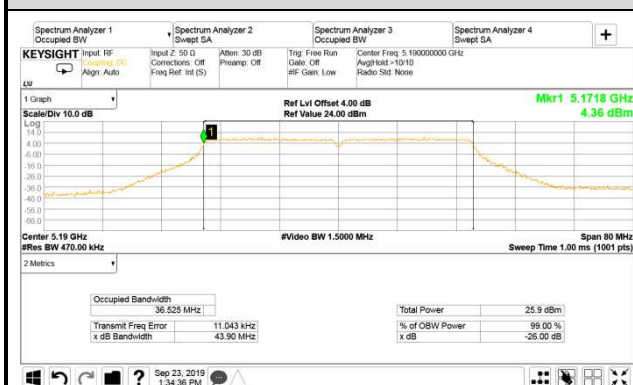



Band NII-2A

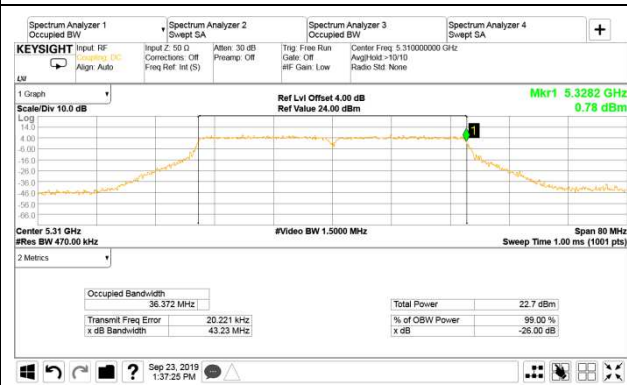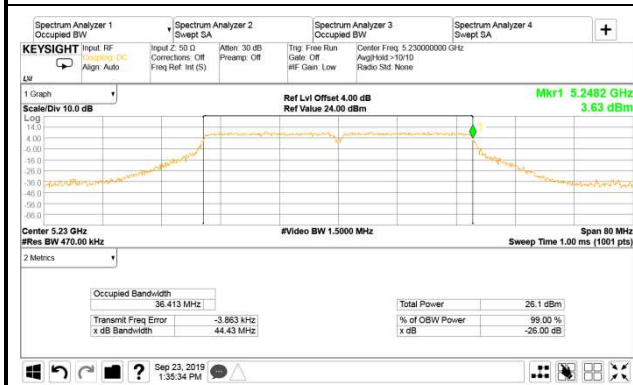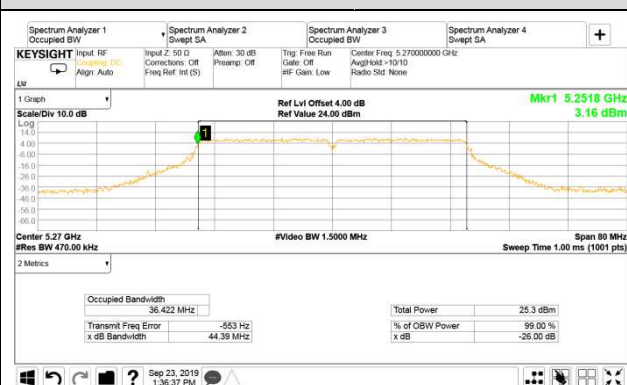

Mode: 802.11n-HT40


Band NII-2C

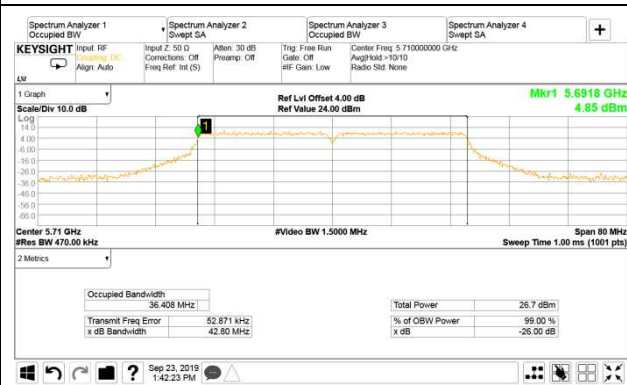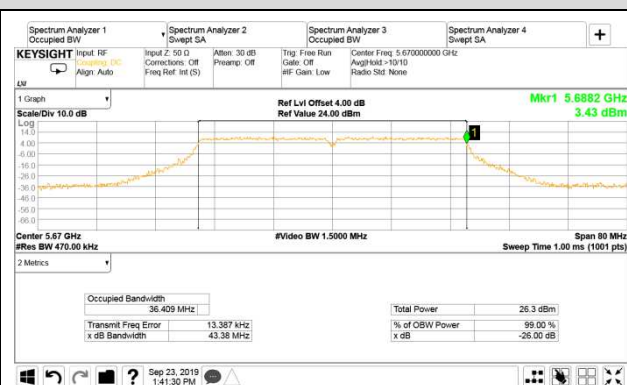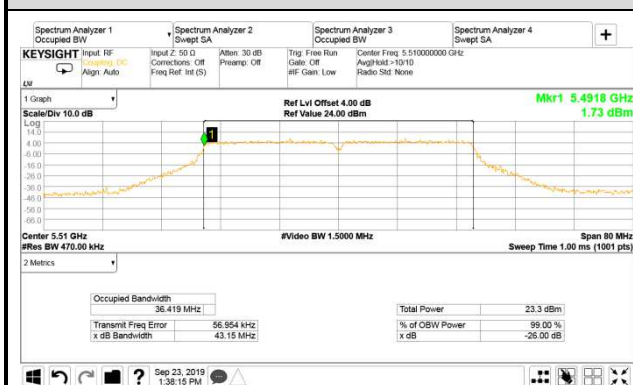



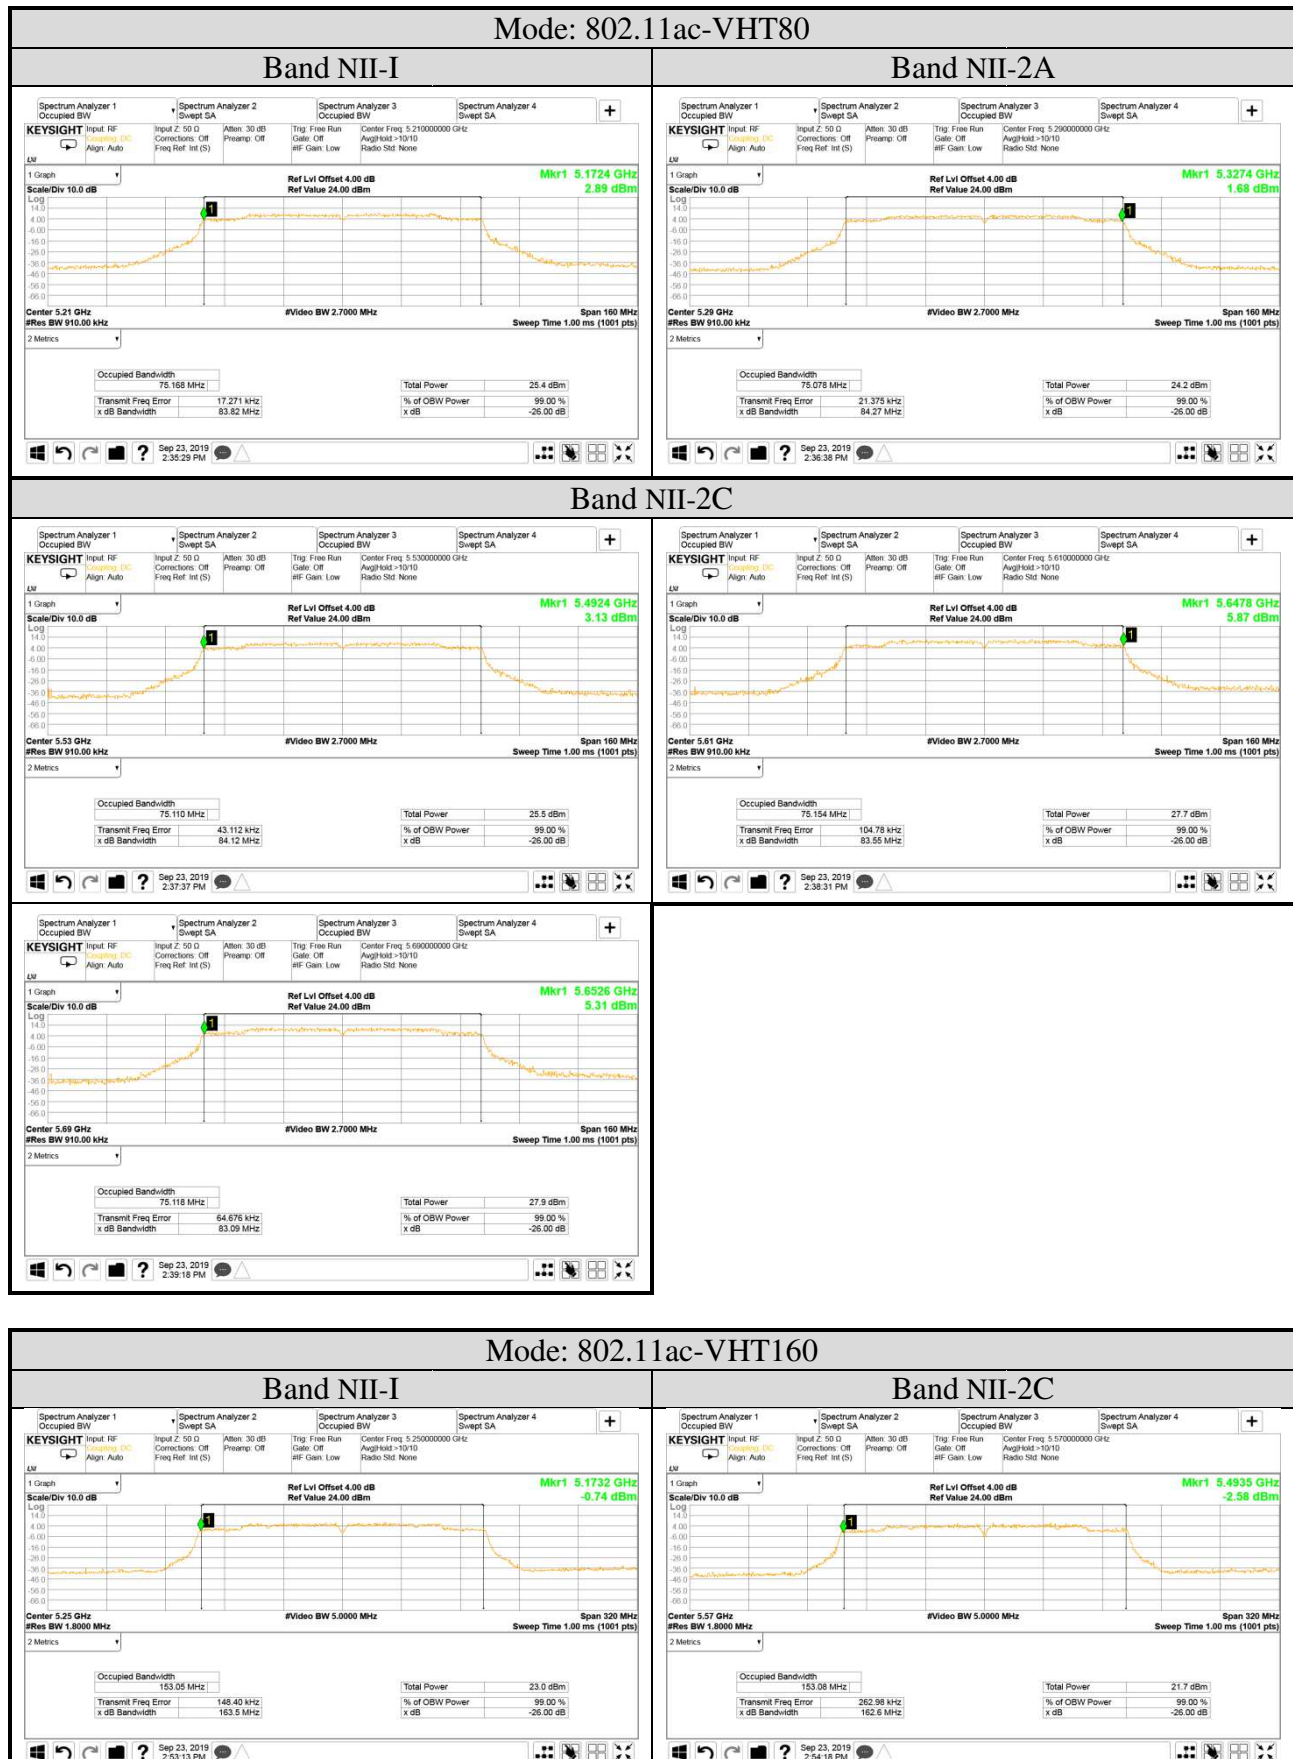


Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

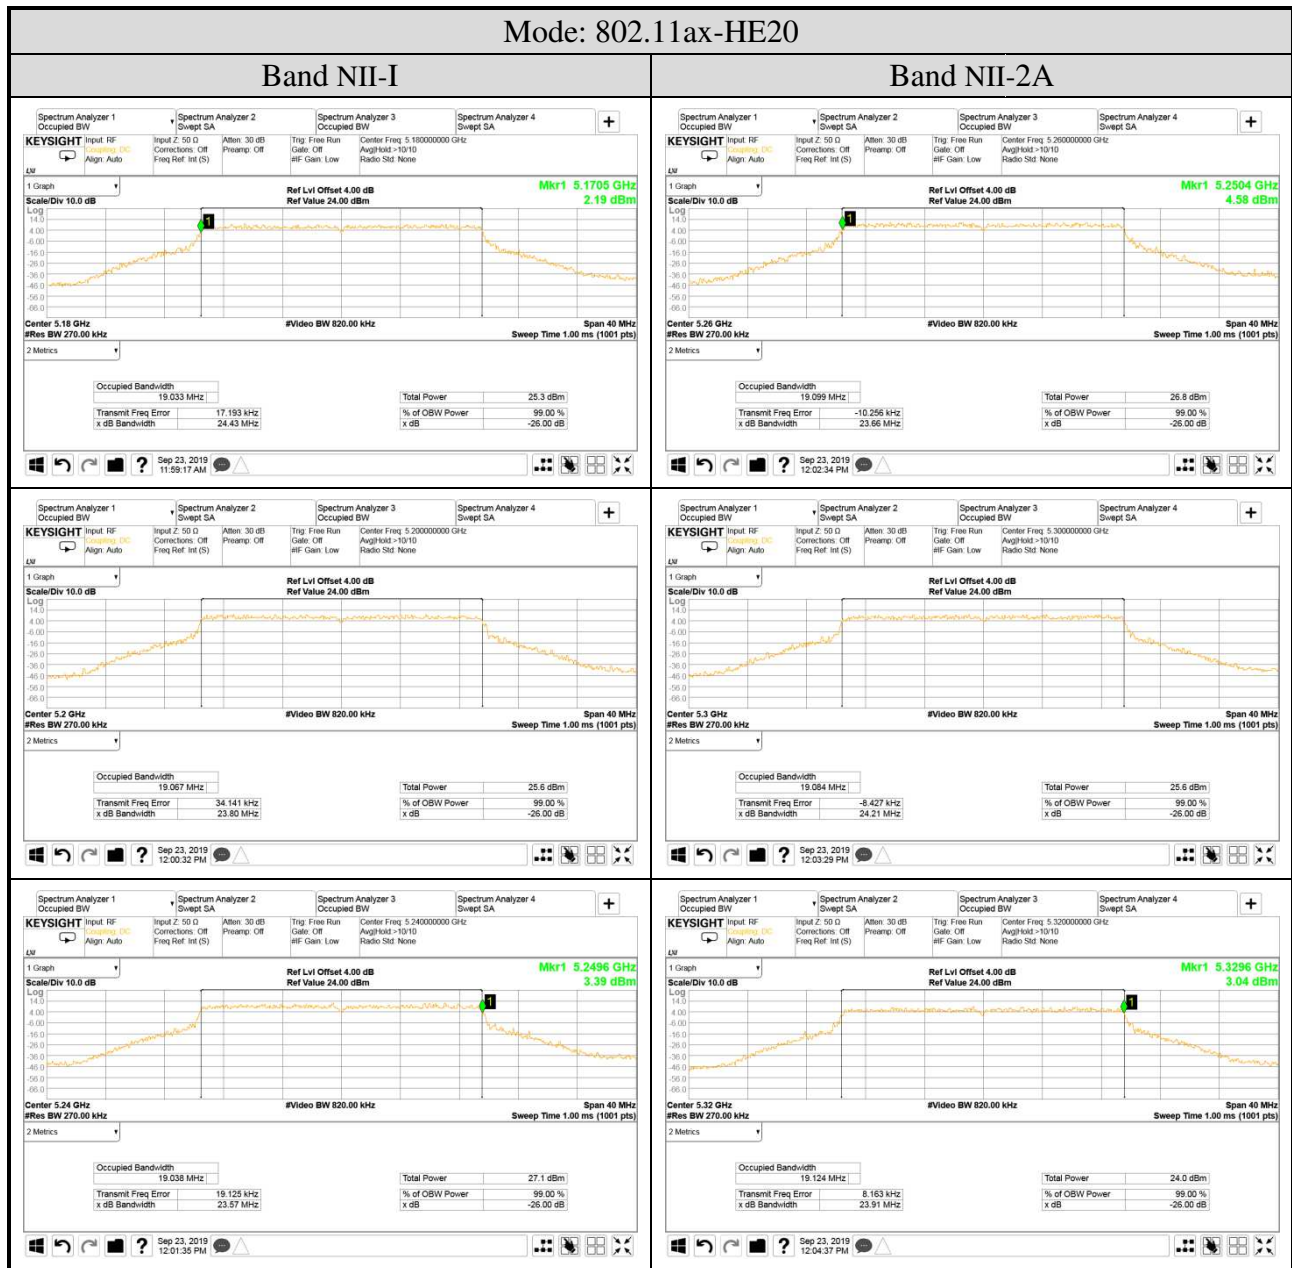

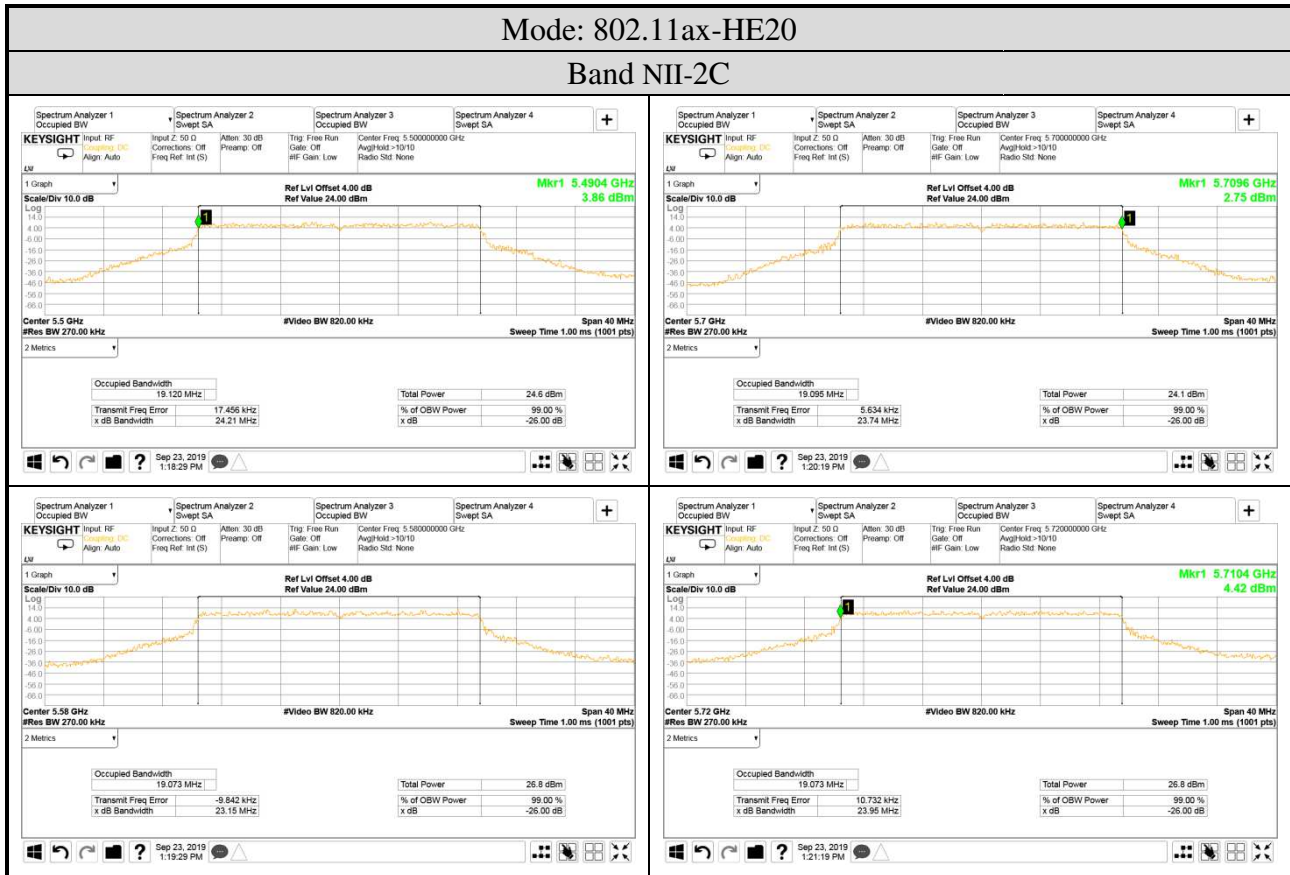

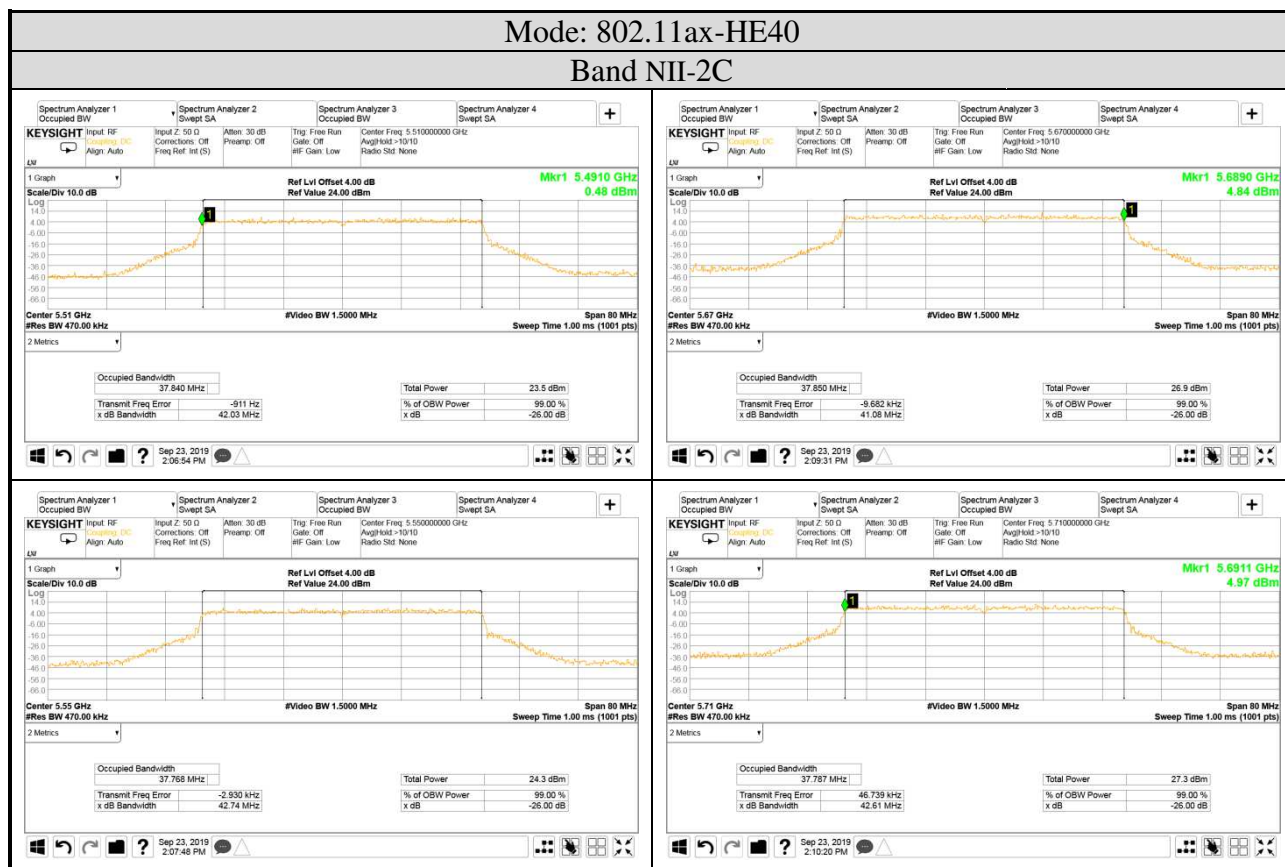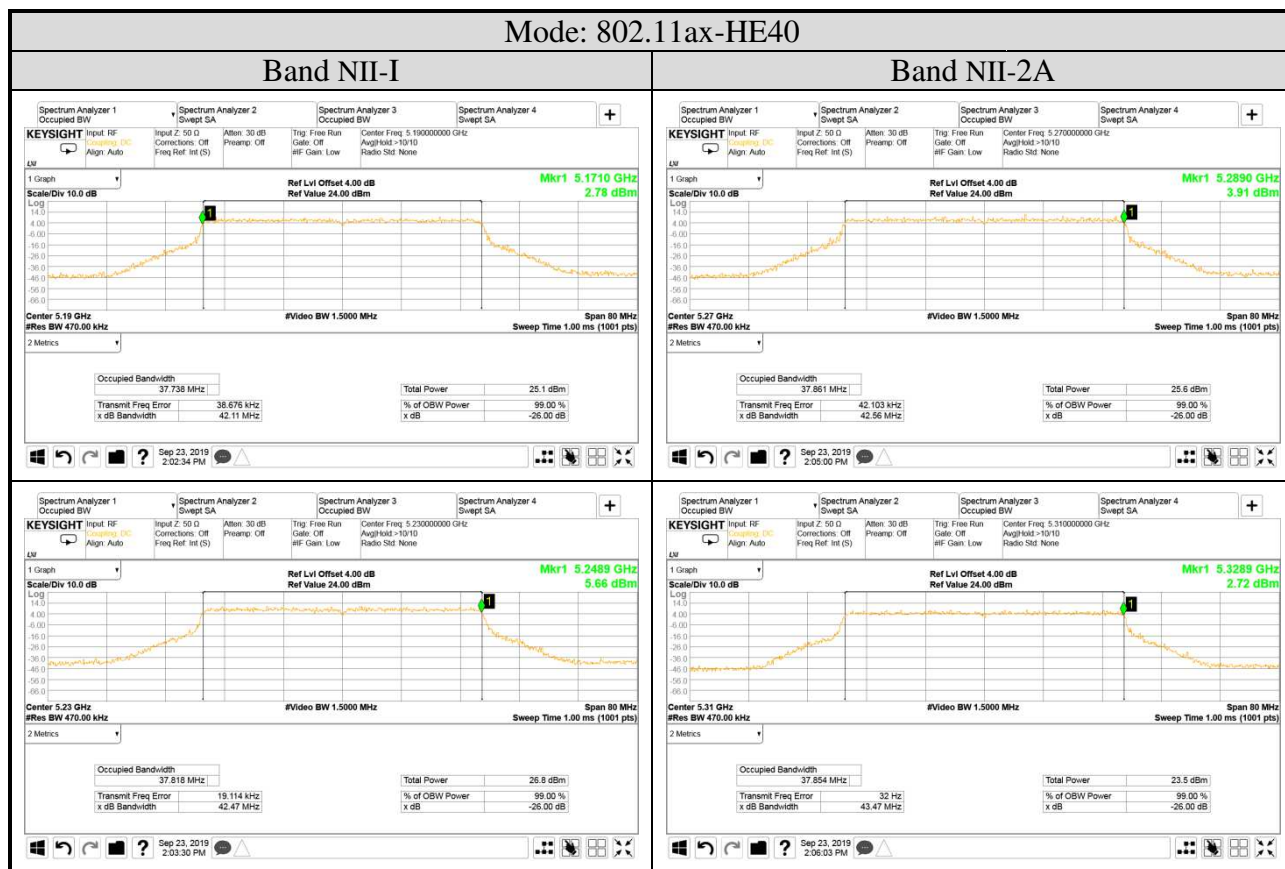

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

