

WA-P-LELE-04-070 Specification

1. Explanation of part number :

WA - P - LELE - 04 - 070
(1) (2) (3) (4) (5)

(1) Product Type : Wireless Antenna

(2) P: PCB+Cable

(3) Frequency : 2400~2500MHz&5150~5850MHz&5925~7125MHz

(4) Coaxial Cable Type : With ϕ 0.81 Main Black / AUX Gray

(5) Suffix : 070

2. Storage Condition:

Temperature -40 to +70℃
Humidity 20 to 65 %RH

3. Operating Condition:

Temperature -40 to +70℃
Humidity 10 to 85 %RH

4. Electrical Specification :

Those specifications were specially defined for LG 16Z90T TC WIFI model, and all characteristics were measured under the model's handset testing jig .

4-1. Frequency Band:

Frequency Band	MHz
WIFI\BT	2400~2500 & 5150~5850 & 5925~7125

UNLESS OTHER SPECIFIED TOLERANCES ON : X = $\pm$ X.X = $\pm$ X.XX = $\pm$ ANGLES = $\pm$ HOLEDIA = $\pm$		 佳邦科技股份有限公司 INPAQ TECHNOLOGY CO., LTD.	
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY: 许叶祯	CHECKED BY: 李志强		
DESIGNED BY : 刘海	APPROVED BY : 唐龙		
TITLE : WA-P-LELE-04-070 Specification		DOCUMENT NO.	PAGE REV. ENS000200360 P2

4-2. Impedance

50 ohm nominal

4-3. Matching circuit

None

4-4. VSWR


4-4.1 Measuring Method

- 1.A 50Ωcoaxial cable is connected to the antenna. Then this cable is connected to a network analyzer to measure the VSWR
- 2.Keeping this jig away from metal at least 20cm


4-4.2 Measurement frequency points and VSWR value

VSWR	Frequency (Unit MHz)	Spec	1
Main Antenna	2400	≤ 3.0	2.0
	2500	≤ 3.5	2.4
	5000	≤ 3.0	2.0
	6000	≤ 4.0	2.3
	Judgement		ok
Aux Antenna	2400	≤ 3.0	1.7
	2500	≤ 4.5	3.8
	5000	≤ 3.0	2.1
	6000	≤ 3.0	1.6
	Judgement		ok

Main Antenna-1

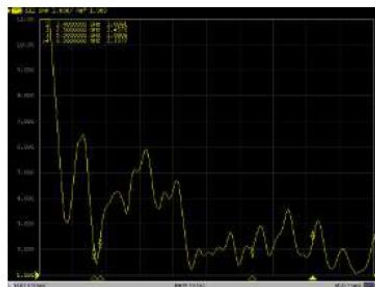

AUX Antenna-1

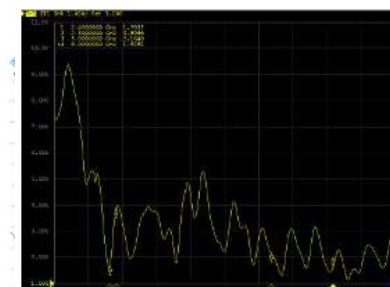

UNLESS OTHER SPECIFIED TOLERANCES ON :

X = $\pm$ X.X = $\pm$ X.XX = $\pm$

ANGLES = $\pm$ HOLEDIA = $\pm$

SCALE : UNIT : mm

DRAWN BY: 许叶祯 CHECKED BY: 李志强

DESIGNED BY: 刘海 APPROVED BY: 唐龙

TITLE : WA-P-LELE-04-070 Specification



佳邦科技股份有限公司
INPAQ TECHNOLOGY CO., LTD.

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

DOCUMENT
NO.

ENS000200360

PAGE REV.
P2

4-5.2 Efficiency and Gain

Antenna gain is marked (dBi) and is based on STANDARD HORN antenna. The data shows Peak Gain and Average Gain.

4-5-2-1 Electrical specification

Frequency (MHz)	Average Efficiency (%)
2400~2500	>30
5100~5825	>30
5925~7125	>30

4-5.2-2 Efficiency and Gain Test Data

Frequency (MHz)	Main Antenna-1			Frequency (MHz)	Aux Antenna-1		
	Efficiency (%)	Gain w/ cable loss (dBi)	Peak Gain w/ cable loss (dBi)		Efficiency (%)	Gain w/ cable loss (dBi)	Peak Gain w/ cable loss (dBi)
2.4GHz (2400~2500MHz)	43%	-3.7	2.1	2.4GHz (2400~2500MHz)	42%	-3.8	2.5
5.2&5.3GHz (5150~5350MHz)	38%	-4.2	1.5	5.2&5.3GHz (5150~5350MHz)	33%	-4.8	0.8
5.5GHz (5470~5725MHz)	35%	-4.6	0.9	5.5GHz (5470~5725MHz)	32%	-4.9	1.1
5.8GHz (5725~5850MHz)	36%	-4.4	1.8	5.8GHz (5725~5850MHz)	36%	-4.4	1.5
5.9GHz (5850~5900MHz)	38%	-4.2	1.8	5.9GHz (5850~5900MHz)	37%	-4.3	1.7
6.2GHz (5925~6425MHz)	41%	-4.4	1.7	6.2GHz (5925~6425MHz)	40%	-4	1.9
6.5GHz (6425~6525MHz)	34%	-3.9	0.9	6.5GHz (6425~6525MHz)	38%	-4.2	1.4
6.7GHz (6525~6875MHz)	39%	-4.1	1.5	6.7GHz (6525~6875MHz)	37%	-4.3	2
6.9GHz (6875~7125MHz)	35%	-4.6	1.4	6.9GHz (6875~7125MHz)	41%	-3.9	1.8

UNLESS OTHER SPECIFIED TOLERANCES ON :

X = ± X.X = ± X.XX = ±

ANGLES = ± HOLEDIA = ±

SCALE : UNIT : mm

DRAWN BY: 许叶祯 CHECKED BY: 李志强

DESIGNED BY: 刘海 APPROVED BY: 唐龙

TITLE : WA-P-LELE-04-070 Specification



佳邦科技股份有限公司
INPAQ TECHNOLOGY CO., LTD.


THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

DOCUMENT
NO.

ENS000200360

PAGE REV.
P2

4-5.2-3 Antenna 3D Radiation Pattern

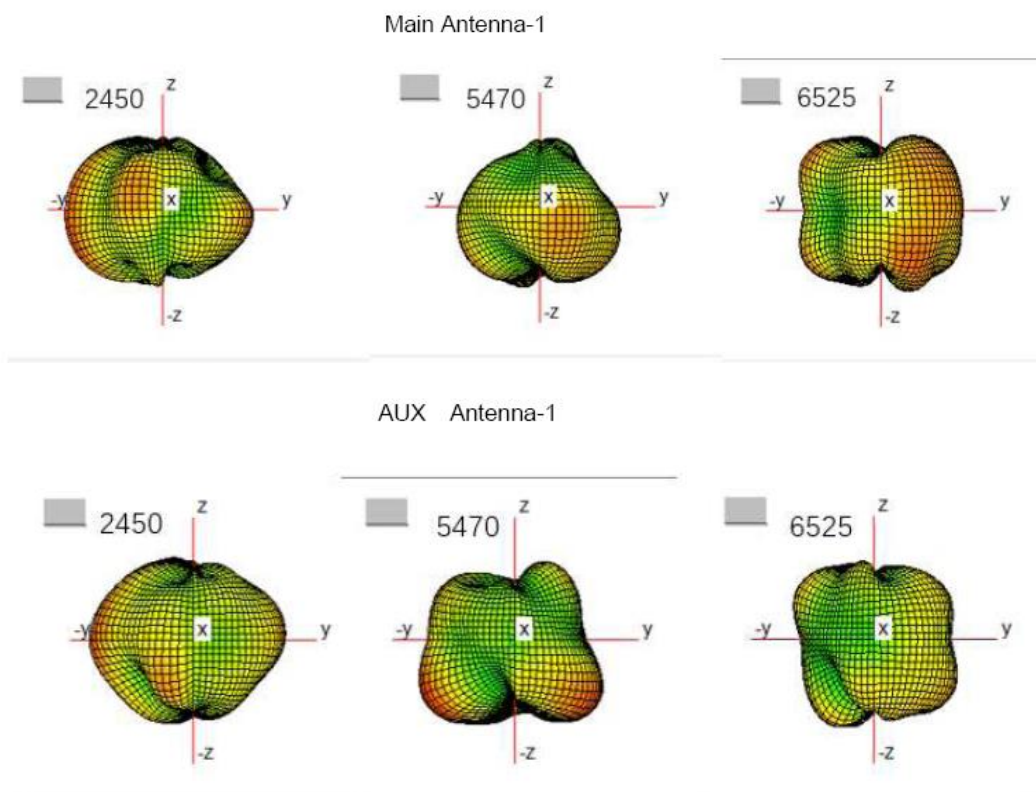

5. Mechanical Specification:

Con Connector: I-PEX MHF 4L: 20572; Cable: RF Cable 0.81 (Main Black/Aux Gray) Gray)


Cab Cable length: Aux Antenna L: $375.9 \pm 2\text{mm}$ (Include connector)

Main Antenna L: $328.6 \pm 2\text{mm}$ (Include connector)



UNLESS OTHER SPECIFIED TOLERANCES ON :			 佳邦科技股份有限公司 INPAQ TECHNOLOGY CO., LTD.		
X = ±	X.X = ±	X.XX = ±			
ANGLES = ±		HOLEDIA = ±	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION		
SCALE :		UNIT : mm			
DRAWN BY: 许叶祯		CHECKED BY: 李志强			
DESIGNED BY : 刘海		APPROVED BY : 唐龙			
TITLE : WA-P-LELE-04-070 Specification			DOCUMENT NO.	ENS000200360	PAGE REV. P2

Mechanical Configuration:

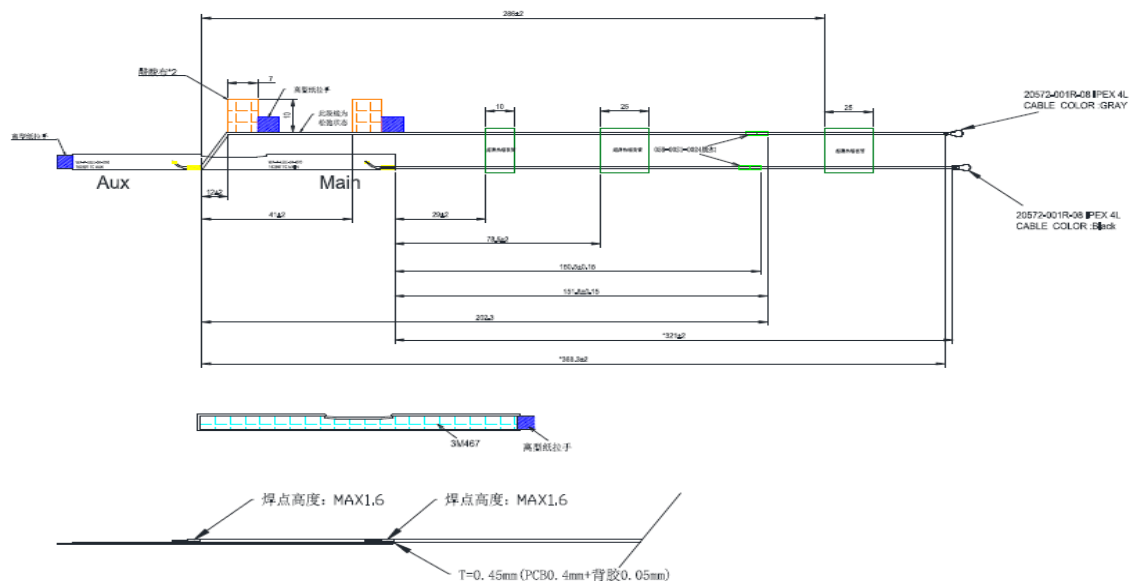

Material list :

Item	Description	Material	Quantity
1	PCB	PCB WA-P-LELE-04-070	1
2	Acetate tape	Acetate tape 21x7mm, T0.12mm	2
3	Shrink Tube 1	Shrink Tube black, \$ 1.5 x10mm	1
4	Shrink Tube 2	Shrink Tube black, \$ 1.5 x25mm	2
5	Cable black	Cable 0.81 black	1
6	Cable gray	Cable 0.81 gray	1
7	Connector	I-PEX MHF 4L for 0.81, 20572	2
8	TAP	TAP 3M467 74x4mm	1
9	Clamp	Clamp 0.81 5mm	2

6. UL File No:

ITEM	DESCRIPTION	SUPPLIER	UL File No
1	PCB	HA0129	E202191
2	CABLE	HA0008	E318898
		HA0053	E464731

UNLESS OTHER SPECIFIED TOLERANCES ON :

$$X = \pm \quad X, X = \pm \quad X, XX = \pm$$

ANGLES = $\pm$ **HOLEDIA = $\pm$**

SCALE :	UNIT : mm
---------	-----------

DRAWN BY: 许叶祯

CHECKED BY: 李志强

DESIGNED BY : 刘海

APPROVED BY : 唐龙

TITLE : WA-P-LELE-04-070 Specification



佳邦科技股份有限公司
INPAQ TECHNOLOGY CO., LTD.

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

DOCUMENT NO.

ENS000200360

PAGE	REV.
P2	