

TEST REPORT

DT&C Co., Ltd.

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel : 031-321-2664, Fax : 031-321-1664

Report No : DRTFCC1601-0021
Pages:(1) / (88) page

**1. Customer**


- Name : LG Electronics USA, Inc.
- Address : 1000 Sylvan Avenue, Englewood Cliffs, New Jersey 07632

2. Use of Report : FCC & IC Original Grant**3. Product Name (FCC ID / IC): Notebook Computer (BEJNT-LG14Z96 / 2703H-LG14Z96)****4. Date of Test : 2015-11-16 ~ 2016-01-06****5. Test Method Used: FCC Part 15 Subpart C.247**

RSS-247 Issue 1 (2015-05), RSS-GEN Issue 4 (2014-11)

6. Testing Environment : See appended test report**7. Test Result : ☒ Pass ☐ Fail**

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This Test Report cannot be reproduced, except in full.

Affirmation	Tested by	Technical Manager
	Name : Inhee Bae (Signature) 	Name : GeunKi Son (Signature) 

2016 . 01 . 19 .

DT&C Co., Ltd.

Test Report Version

Test Report No.	Date	Description
DRTFCC1601-0021	Jan. 19, 2016	Initial issue

Table of Contents

1. General Information	4
1.1 Testing Laboratory	4
1.2 Details of Applicant	4
1.3 Description of EUT	4
1.4 Declaration by the applicant / manufacturer	5
1.5 Information about the FHSS characteristics	5
1.6 Test conditions	5
1.7 Test Equipment List.....	6
1.8 Summary of Test Results.....	7
1.9 Conclusion of worst-case and operation mode.....	8
2. Maximum Peak Output Power Measurement	9
2.1 Test Setup	9
2.2 Limit.....	9
2.3 Test Procedure.....	9
2.4 Test Results	10
3. 20 dB BW	16
3.1 Test Setup	16
3.2 Limit.....	16
3.3 Test Procedure.....	16
3.4 Test Results	16
4. Carrier Frequency Separation	22
4.1 Test Setup	22
4.2 Limit.....	22
4.3 Procedure.....	22
4.4 Test Results	22
5. Number of Hopping Frequencies	27
5.1 Test Setup	27
5.2 Limit.....	27
5.3 Procedure.....	27
5.4 Test Results	27
6. Time of Occupancy (Dwell Time).....	33
6.1 Test Setup	33
6.2 Limit.....	33
6.3 Test Procedure.....	33
6.4 Test Results	33
7. Transmitter Radiated Spurious Emissions and Conducted Spurious Emission	38
7.1 Test Setup	38
7.2 Limit.....	38
7.3. Test Procedures.....	39
7.3.1. Test Procedures for Radiated Spurious Emissions	39
7.3.2. Test Procedures for Conducted Spurious Emissions.....	40
7.3.3. Test Plot	40
7.4. Test Results	41
7.4.1. Radiated Emissions.....	41
7.4.2. Conducted Spurious Emissions	44
8. Transmitter AC Power Line Conducted Emission	68
8.1 Test Setup	68
8.2 Limit.....	68
8.3 Test Procedures.....	68
8.4 Test Results	69
9. Antenna Requirement.....	71
10. Occupied Bandwidth (99 %)	72
10.1 Test Setup	72
10.2 Limit.....	72
10.3 Test Procedure.....	72
10.4 Test Results	72
APPENDIX I.....	79
APPENDIX II.....	80

1. General Information

1.1 Testing Laboratory

DT&C Co., Ltd.		
Standard	Site number	Address
FCC	☒ 165783	42, Yurim-ro 154 beon-gil, Cheoin -gu, Yongin-si, Gyeonggi -do, South Korea 449-935
	☐ 804488	42, Yurim-ro 154 beon-gil, Cheoin -gu, Yongin-si, Gyeonggi -do, South Korea 449-935
	☐ 596748	42, Yurim-ro 154 beon-gil, Cheoin -gu, Yongin-si, Gyeonggi -do, South Korea 449-935
	☐ 678747	683-3, Yubang-dong, Cheoin-gu, Yongin-si, Kyeonggi-do, Korea, 449-080
IC	☒ 5740A-3	42, Yurim-ro 154 beon-gil, Cheoin -gu, Yongin-si, Gyeonggi -do, South Korea 449-935
	☐ 5740A-2	683-3, Yubang-dong, Cheoin-gu, Yongin-si, Kyeonggi-do, Korea, 449-080
www.dtc.net		
Telephone	:	+ 82-31-321-2664
FAX	:	+ 82-31-321-1664

1.2 Details of Applicant

Applicant : LG Electronics USA, Inc.
 Address : 1000 Sylvan Avenue, Englewood Cliffs, New Jersey 07632
 Contact person : Jongchul Lee

1.3 Description of EUT

EUT	Notebook Computer
Model Name	LG14Z96, 14Z960, 14ZD960
Serial Number	Identical prototype
Hardware version	1.0
Software version	1.0
Power Supply	AC 120 V
Battery type	Standard Battery: Lithium Ion Battery
Frequency Range	2402 MHz ~ 2480 MHz
Modulation Technique	GFSK, $\pi/4$ -DQPSK, 8DPSK
Number of Channels	79
Antenna Type	Internal Antenna
Antenna Gain	PK : 2.84 dBi

1.4 Declaration by the applicant / manufacturer

- NA

1.5 Information about the FHSS characteristics

- This Bluetooth module has been tested by a Bluetooth Qualification Lab, and we confirm the following :
 - A) The hopping sequence is pseudorandom
 - B) All channels are used equally on average
 - C) The receiver input bandwidth equals the transmit bandwidth
 - D) The receiver hops in sequence with the transmit signal
- 15.247(g) : In accordance with the Bluetooth Industry Standard, the system is designed to comply with all of the regulations in Section 15.247 when the transmitter is presented with a continuous data (or information) system.
- 15.247(h) : In accordance with the Bluetooth Industry Standard, the system does not coordinate its channels selection / hopping sequence with other frequency hopping systems for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters.
- 15.247(h) : The EUT employs Adaptive Frequency Hopping (AFH) which identifies sources of interference namely devices operating in 802.11 WLAN and excludes them from the list of available channels. The process of re-mapping reduces the number of test channels from 79 channels to a minimum number of 20 channels.

1.6 Test conditions

Ambient Condition	
▪ Temperature	+21 °C ~ +23 °C
▪ Relative Humidity	40 % ~ 42 %

1.7 Test Equipment List

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent Technologies	N9030A	15/10/19	16/10/19	MY53310140
Spectrum Analyzer	Agilent Technologies	N9020A	15/08/18	16/08/18	MY50200867
Dynamic Measurement DC Source	Agilent Technologies	66332A	15/01/22	16/01/22	US37471368
Power Meter & Wide Bandwidth Sensor	Anritsu	ML2496A / MA2411B	15/06/25	16/06/25	1338004 / 1306053
Temp & Humi Test Chamber	SJ Science	SJ-TH-S50	15/10/19	16/10/19	SJ-TH-S50-130930
Thermohygrometer	BODYCOM	BJ5478	15/02/26	16/02/26	1209
Signal Generator	Rohde Schwarz	SMF100A	15/06/29	16/06/29	102341
Vector Signal Generator	Rohde Schwarz	SMBV100A	15/01/06	16/01/06	255571
			16/01/05	17/01/05	
Digital Multimeter	Agilent Technologies	34401A	15/01/06	16/01/06	MY41037027
			16/01/05	17/01/05	
Loop Antenna	Schwarzbeck	FMZB1513	14/04/29	16/04/29	1513-128
TRILOG Broadband Test-Antenna	Schwarzbeck	VULB 9160	14/04/30	16/04/30	3358
Double-Ridged Guide Antenna	ETS-Lindgren	3117	14/05/12	16/05/12	140394
Horn Antenna	A.H.Systems Inc.	SAS-574	15/04/30	17/04/30	154
Highpass Filter	Wainwright Instruments	WHKX12-2580-3000-18000-80SS	15/09/23	16/09/23	3
PreAmplifier	TSJ	MLA-010K01-B01-27	15/04/09	16/04/09	1844539
PreAmplifier	Agilent	8449B	15/02/26	16/02/26	3008A00370
EMI Test Receiver	Rohde Schwarz	DSR7	15/10/19	16/10/19	101109
EMI Test Receiver	Rohde Schwarz	ESCI	15/02/25	16/02/25	100364
Single-Phase Master	NF	4420	15/09/09	16/09/09	3.04935E+12
Artificial Mains Network	Narda S.T.S. / PMM	PMM L2-16B	15/06/26	16/06/26	000WX20305

1.8 Summary of Test Results

FCC Part RSS Std.	Parameter	Limit (Using in 2400~ 2483.5 MHz)	Test Condition	Status Note 1
15.247(a) RSS-247(5.1)	Carrier Frequency Separation	≥ 25 kHz or $\geq$ Two thirds of the 20 dB BW, whichever is greater.	Conducted	C
	Number of Hopping Frequencies	≥ 15 hops		C
	20 dB Bandwidth	None		C
	Dwell Time	≤ 0.4 seconds		C
15.247(b) RSS-247(5.4)	Transmitter Output Power	For FCC ≤ 1 Watt , if CHs ≥ 75 Others ≤ 0.125 W For IC if CHs ≥ 75 ≤ 1 Watt For Conducted Power ≤ 4 Watt For e.i.r.p, Others ≤ 0.125 W For Conducted Power. ≤ 0.5 Watt For e.i.r.p		C
15.247(d) RSS-247(5.5)	Conducted Spurious Emissions	The radiated emission to any 100 kHz of out-band shall be at least 20 dB below the highest in-band spectral density.		C
RSS Gen(6.6)	Occupied Bandwidth (99 %)	RSS-Gen		C
15.205 & 209 RSS-247(5.5) RSS-Gen (8.9 & 8.10)	Radiated Spurious Emissions	FCC 15.209 Limits RSS-Gen 8.9	Radiated	C ^{Note2}
15.207 RSS-Gen(8.8)	AC Conducted Emissions	FCC 15.207 Limits	AC Line Conducted	C
15.203 RSS-Gen(6.7)	Antenna Requirements	FCC 15.203	-	C

Note 1 : C = Comply NC = Not Comply NT = Not Tested NA = Not Applicable

Note 2 : This test item was performed in each axis and the worst case data was reported.

Note 3 : The sample was tested according to the following specifications :

- ANSI C63.10-2013

1.9 Conclusion of worst-case and operation mode

The EUT has three type of modulation (GFSK, $\pi/4$ DQPSK and 8DPSK).

Therefore all applicable requirements were tested with all the modulations.

The field strength of spurious emission was measured in three orthogonal EUT positions (X-axis, Y-axis and Z-axis).

Tested frequency information,

- Hopping Function : Enable

	TX Frequency (MHz)	RX Frequency (MHz)
Hopping Band	2402 ~ 2480	2402 ~ 2480

- Hopping Function : Disable

	TX Frequency (MHz)	RX Frequency (MHz)
Lowest Channel	2402	2402
Middle Channel	2441	2441
Highest Channel	2480	2480

2. Maximum Peak Output Power Measurement

2.1 Test Setup

Refer to the APPENDIX I.

2.2 Limit

■ FCC Requirements

The maximum peak output power of the intentional radiator shall not exceed the following :

1. §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
2. §15.247(b)(1), For frequency hopping systems operating in the 2400 – 2483.5 MHz employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725 – 5805 MHz band : 1 Watt.

■ IC Requirements

1. RSS-247(5.4), For FHSs operating in the band 2400 - 2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W and the e.i.r.p. shall not exceed 4 W if the hopset uses 75 or more hopping channels the maximum peak conducted output power shall not exceed 0.125 W and the e.i.r.p. shall not exceed 0.5 W if the hopset uses less than 75 hopping channels

2.3 Test Procedure

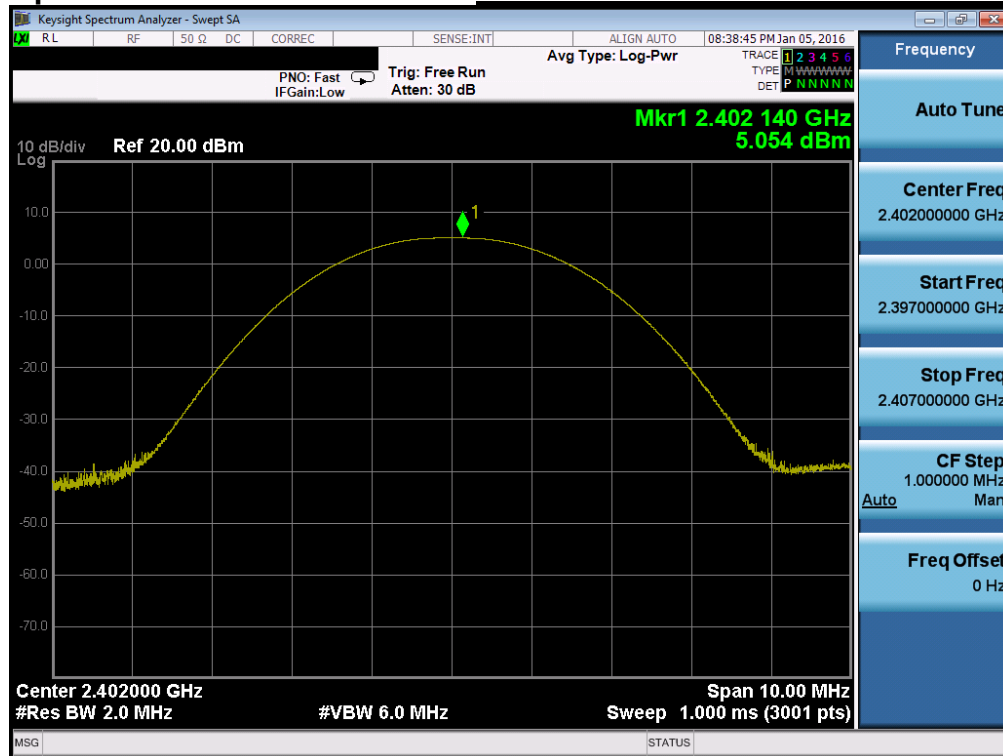
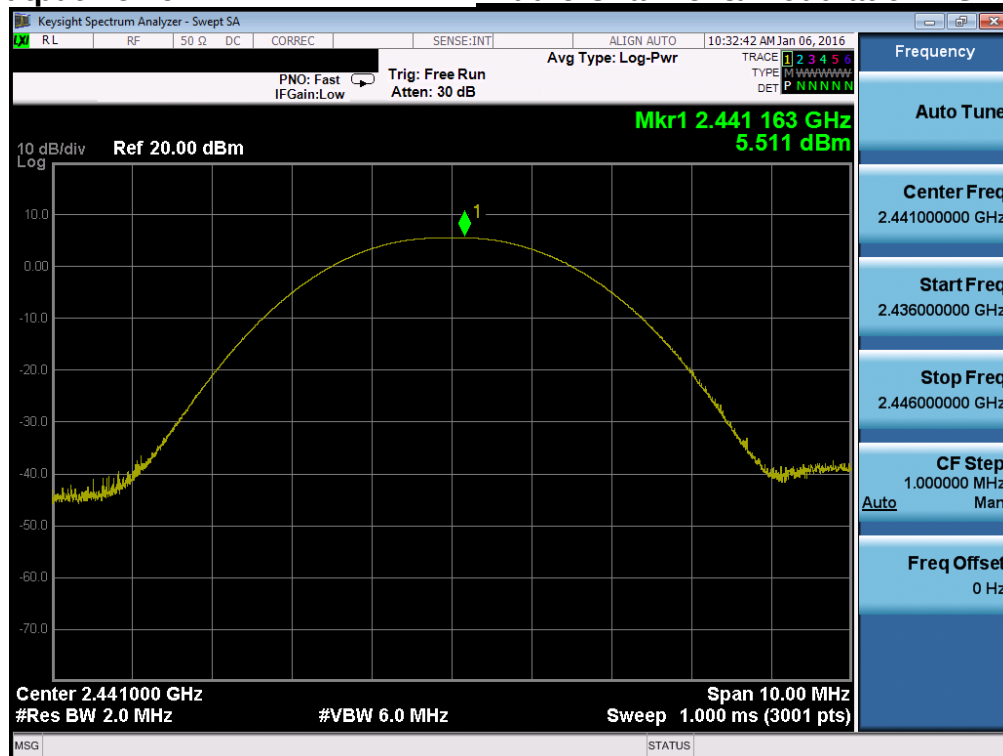
1. The RF output power was measured with a spectrum analyzer connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency, A spectrum analyzer was used to record the shape of the transmit signal.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using ;
Span = approximately 5 times of the 20 dB bandwidth, centered on a hopping channel
RBW $\geq$ 20 dB BW
VBW $\geq$ RBW
Sweep = auto
Detector function = peak
Trace = max hold

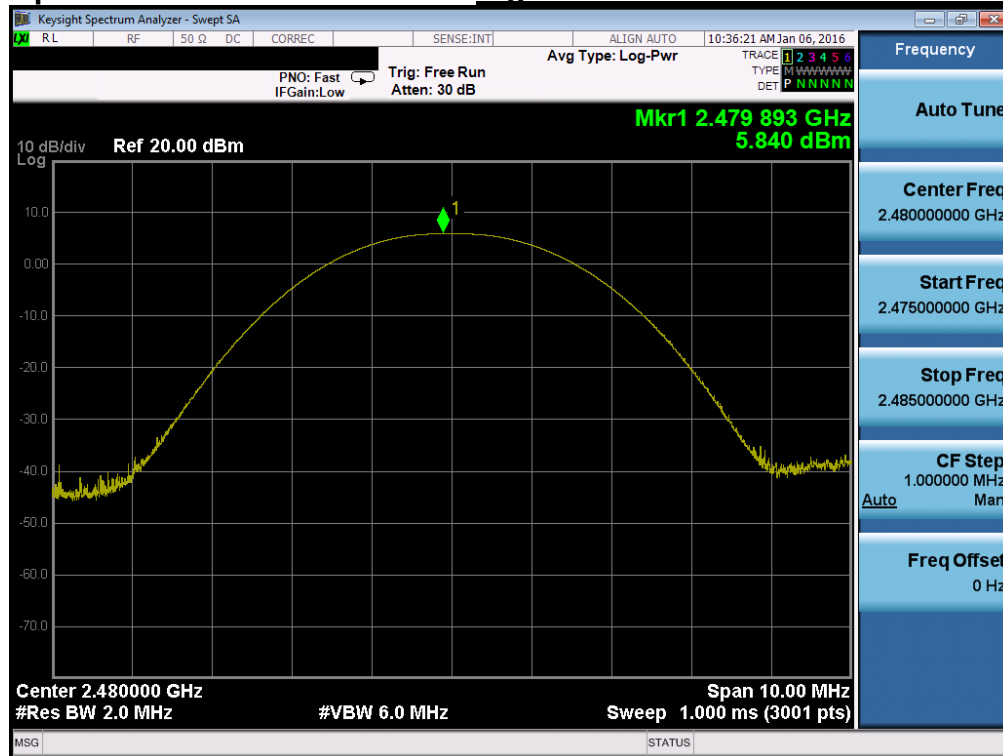
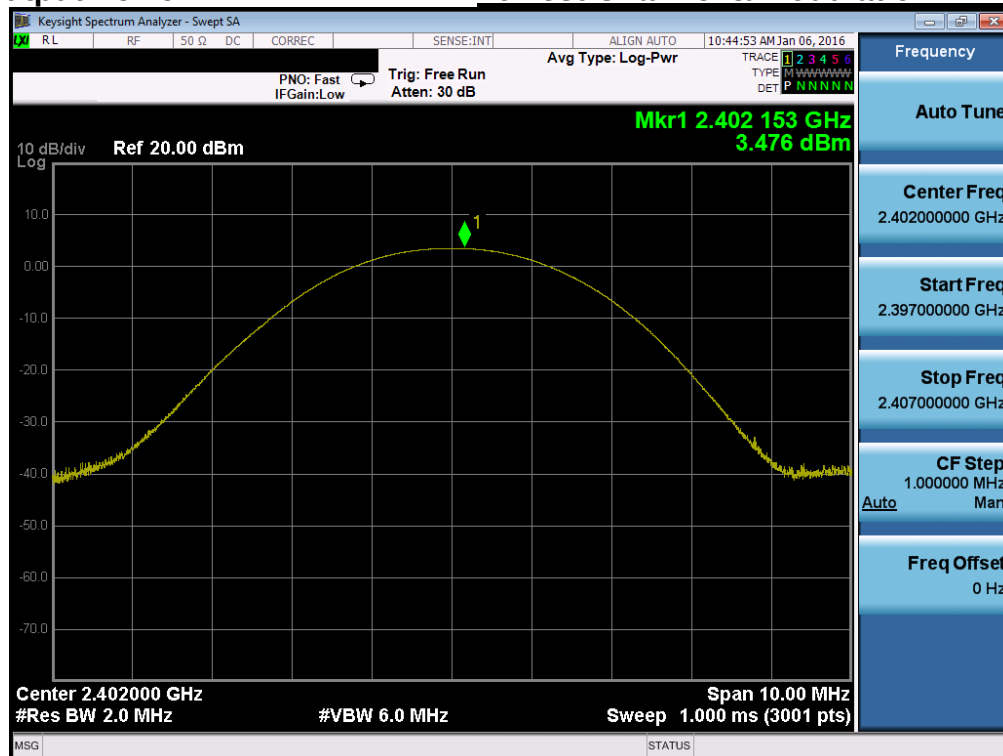
2.4 Test Results

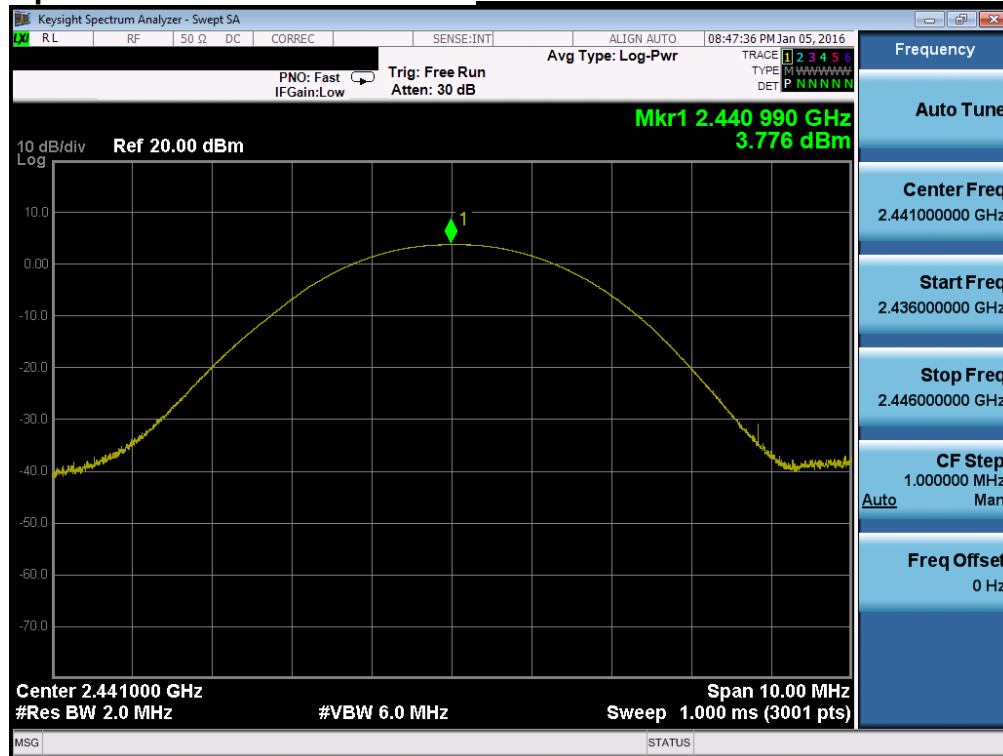
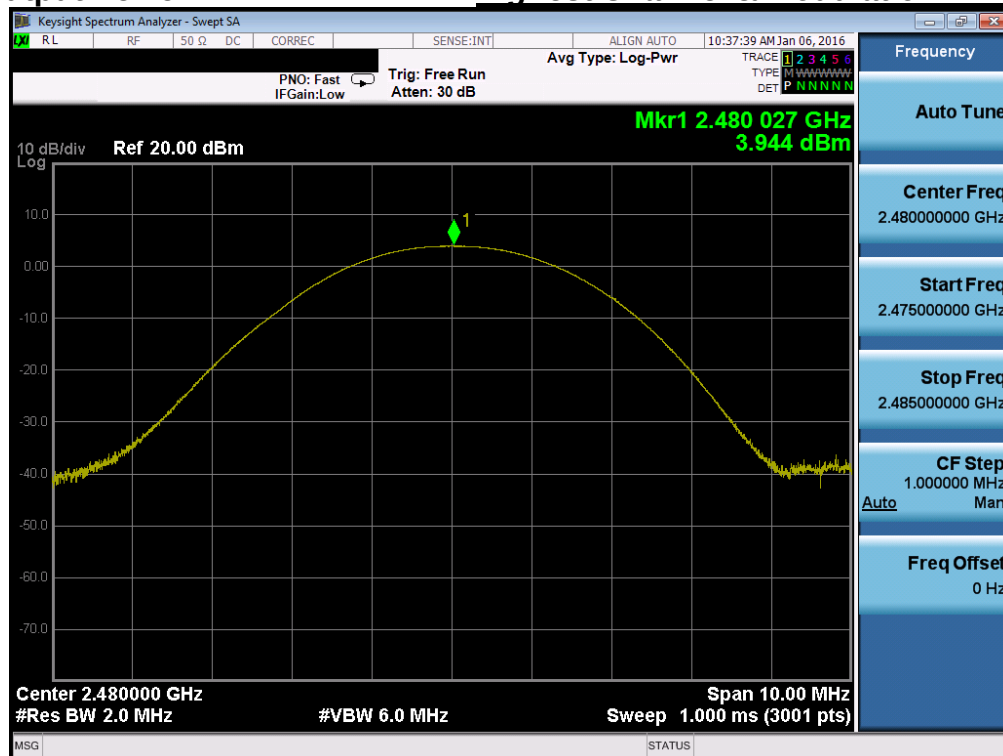
Modulation	Tested Channel	Frame Average Output Power		Peak Output Power	
		dBm	mW	dBm	mW
<u>GFSK</u>	Lowest	4.06	2.547	5.05	3.202
	Middle	4.52	2.831	5.51	3.557
	Highest	4.79	3.013	5.84	3.837
<u>$\pi/4$DQPSK</u>	Lowest	0.28	1.067	3.48	2.226
	Middle	0.61	1.151	3.78	2.386
	Highest	0.84	1.213	3.94	2.480
<u>8DPSK</u>	Lowest	-0.18	0.959	3.21	2.094
	Middle	0.12	1.028	3.72	2.352
	Highest	0.25	1.059	3.86	2.434

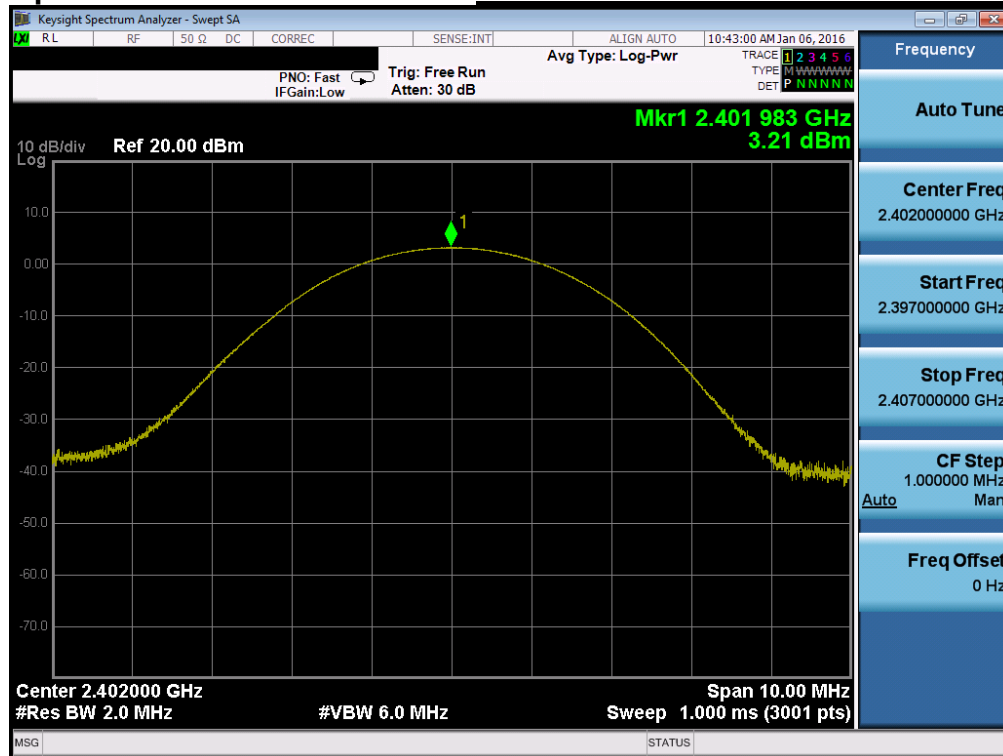
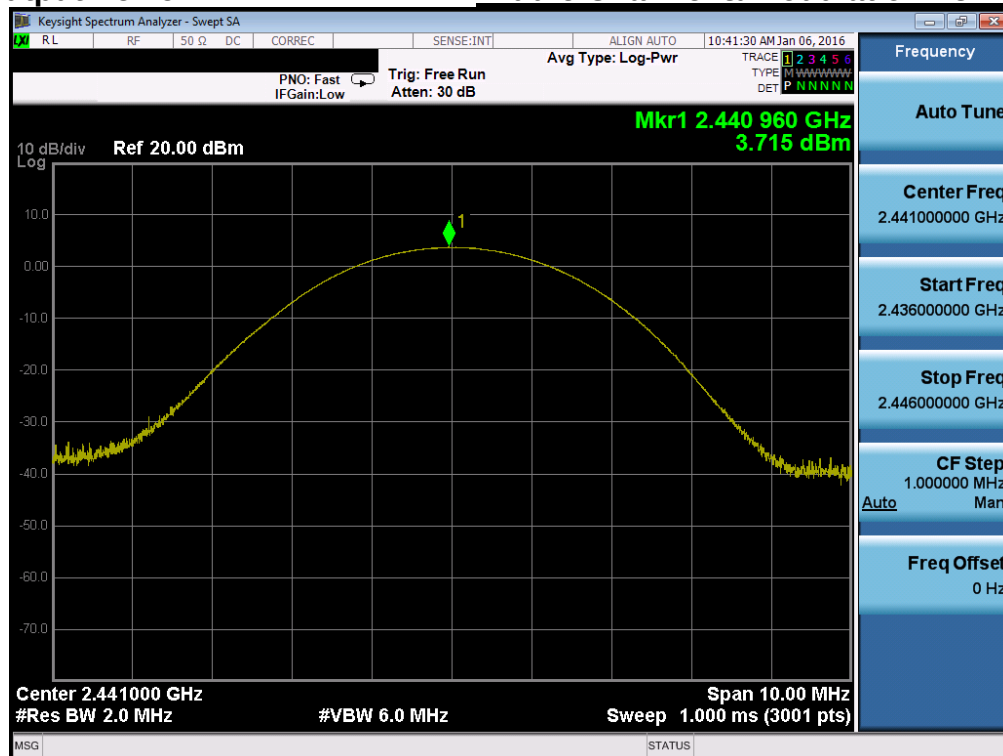
Note 1 : Average output power was using the average power meter for reference only.

Note 2 : See next pages for actual measured spectrum plots.

Peak Output Power***Lowest Channel & Modulation : GFSK*****Peak Output Power*****Middle Channel & Modulation : GFSK***

Peak Output Power***Highest Channel & Modulation : GFSK*****Peak Output Power*****Lowest Channel & Modulation : $\pi/4$ DQPSK***

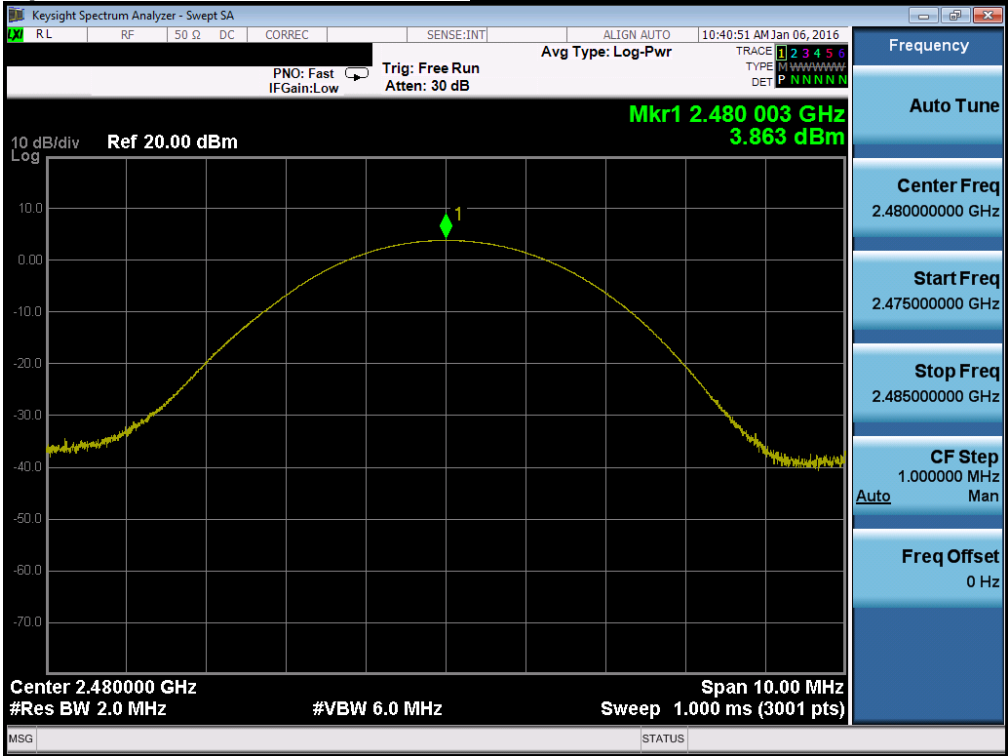
Peak Output Power***Middle Channel & Modulation : $\pi/4$ DQPSK*****Peak Output Power*****Highest Channel & Modulation : $\pi/4$ DQPSK***

Peak Output Power**Lowest Channel & Modulation : 8DPSK****Peak Output Power****Middle Channel & Modulation : 8DPSK**



Peak Output Power

Highest Channel & Modulation : 8DPSK



3. 20 dB BW

3.1 Test Setup

Refer to the APPENDIX I.

3.2 Limit

Limit : Not Applicable

3.3 Test Procedure

1. The 20 dB bandwidth were measured with a spectrum analyzer connected to RF antenna Connector (conducted measurement) while EUT was operating in transmit mode. The analyzer center frequency was set to the EUT carrier frequency, using the analyzer.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using $RBW \geq 1\%$ of the 20 dB bandwidth, $VBW \geq RBW$, Span = 3 MHz.

3.4 Test Results

Modulation	Tested Channel	20 dB BW (MHz)
<u>GFSK</u>	Lowest	0.920
	Middle	0.920
	Highest	0.920
<u>$\pi/4$DQPSK</u>	Lowest	1.510
	Middle	1.510
	Highest	1.510
<u>8DPSK</u>	Lowest	1.510
	Middle	1.510
	Highest	1.510

Note 1 : See next pages for actual measured spectrum plots.

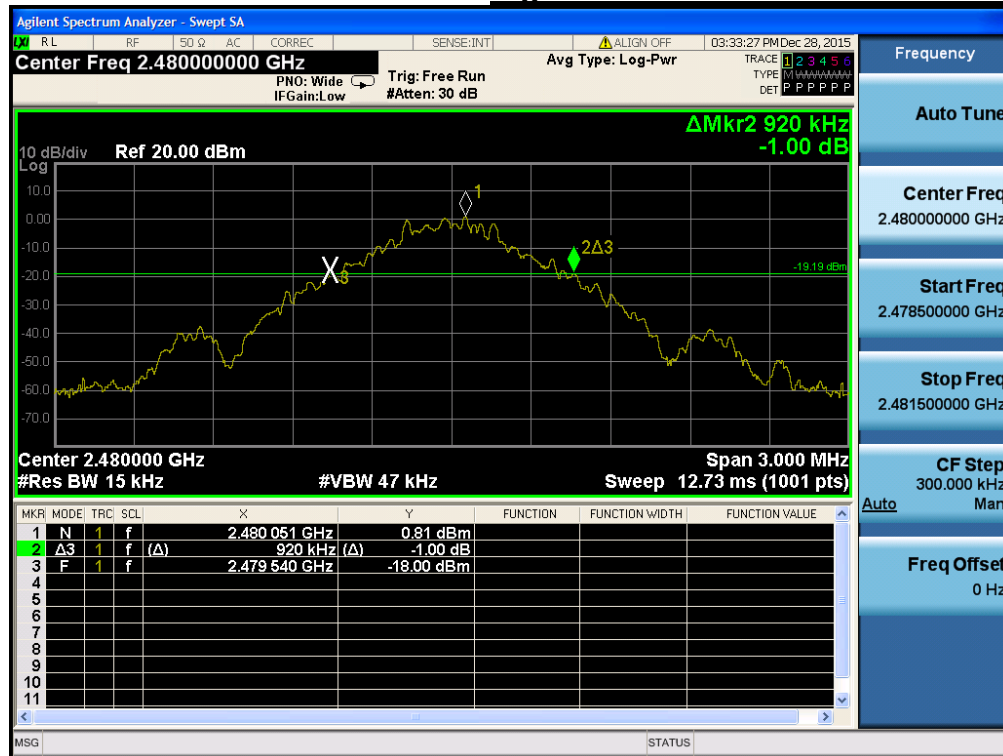
20 dB Bandwidth

Lowest Channel & Modulation : GFSK

20 dB Bandwidth

Middle Channel & Modulation : GFSK

20 dB Bandwidth

Highest Channel & Modulation : GFSK

20 dB Bandwidth

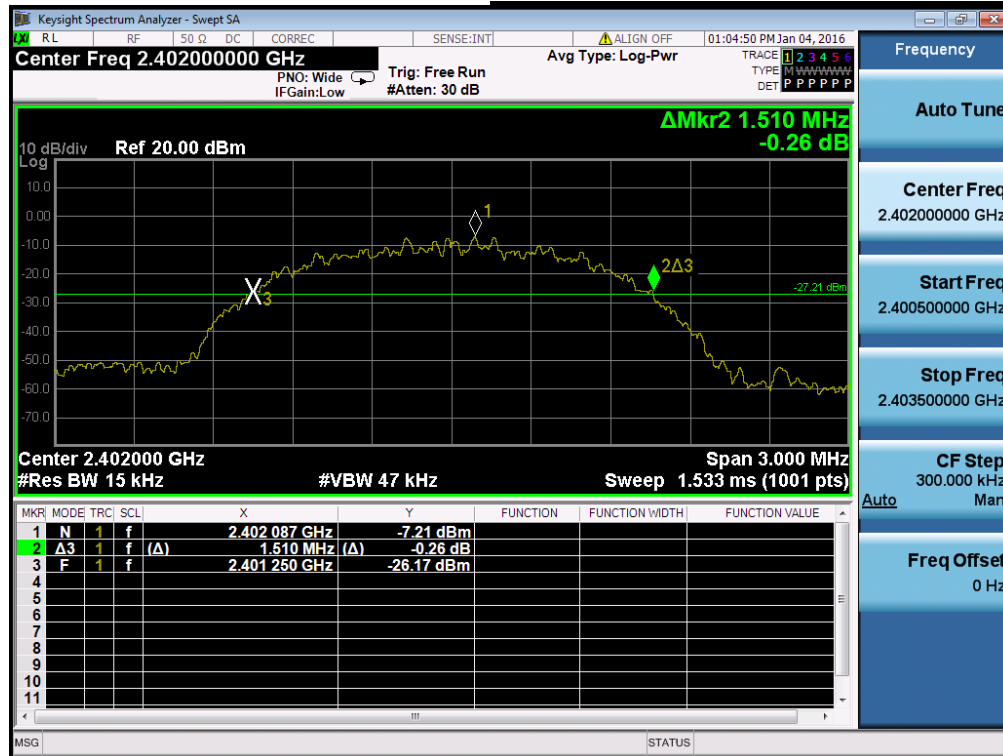
Lowest Channel & Modulation : π /4DQPSK

20 dB Bandwidth

Middle Channel & Modulation : $\pi/4$ DQPSK

20 dB Bandwidth

Highest Channel & Modulation : $\pi/4$ DQPSK

20 dB Bandwidth***Lowest Channel & Modulation : 8DPSK*****20 dB Bandwidth*****Middle Channel & Modulation : 8DPSK***



20 dB Bandwidth

Highest Channel & Modulation : 8DPSK



4. Carrier Frequency Separation

4.1 Test Setup

Refer to the APPENDIX I.

4.2 Limit

Limit : ≥ 25 kHz or $\geq$ Two-Thirds of the 20 dB BW whichever is greater.

4.3 Procedure

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

After the trace being stable, the reading value between the peaks of the adjacent channels using the marker-delta function was recorded as the measurement results.

The spectrum analyzer is set to :

Span = wide enough to capture the peaks of two adjacent channels

RBW = Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

4.4 Test Results

FH mode

Hopping Mode	Test Mode	Peak of center channel (MHz)	Peak of adjacent Channel (MHz)	Test Result (MHz)
Enable	GFSK	2440.832	2441.834	1.002
	$\pi/4$ -DQPSK	2440.994	2441.996	1.002
	8DPSK	2440.826	2441.828	1.002

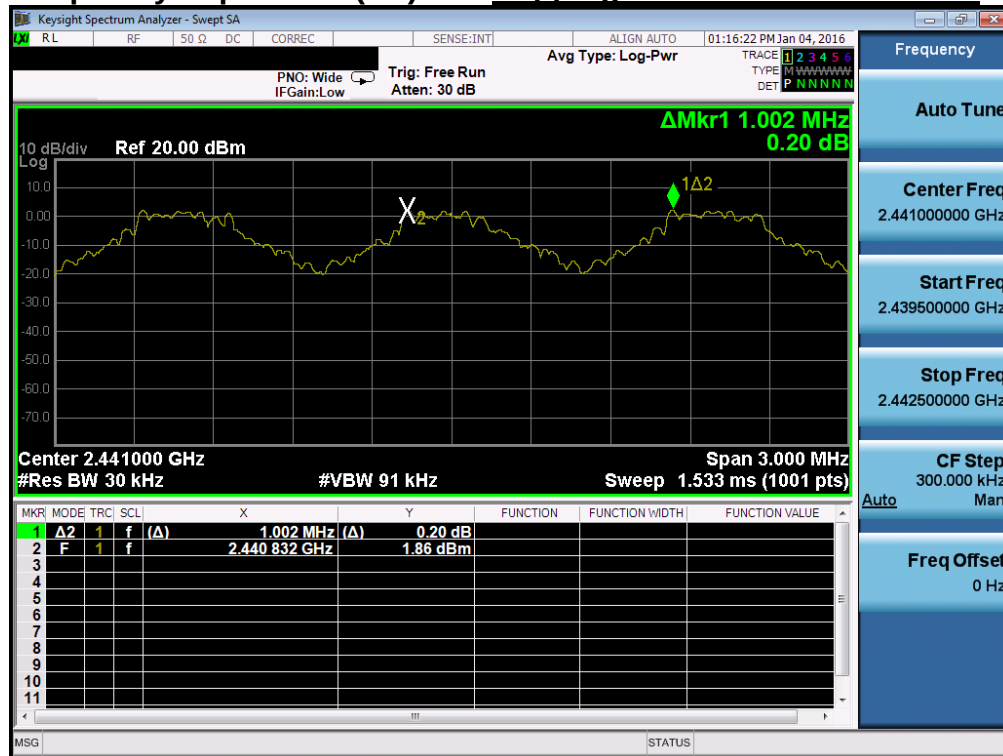
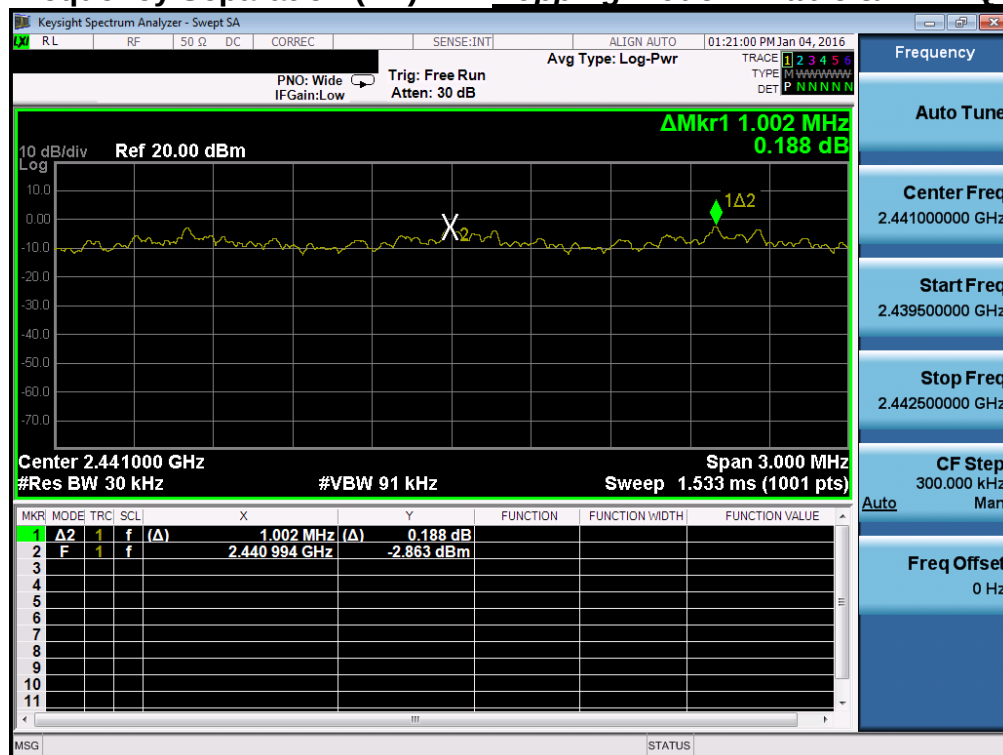
AFH mode

Hopping Mode	Test Mode	Peak of center channel (MHz)	Peak of adjacent Channel (MHz)	Test Result (MHz)
Enable	GFSK	2440.829	2441.831	1.002
	$\pi/4$ -DQPSK	2440.994	2441.996	1.002
	8DPSK	2440.829	2441.831	1.002

Note 1 : See next pages for actual measured spectrum plots.

- Minimum Standard :

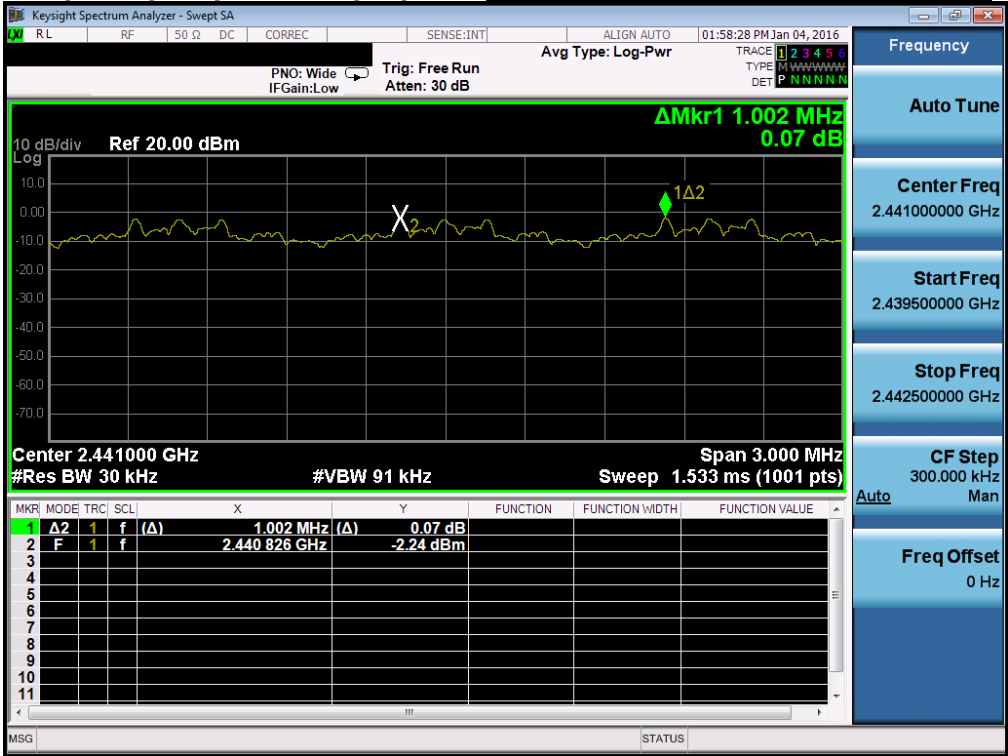
Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.
Alternatively, frequency hopping systems operating in the 2400 - 2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW

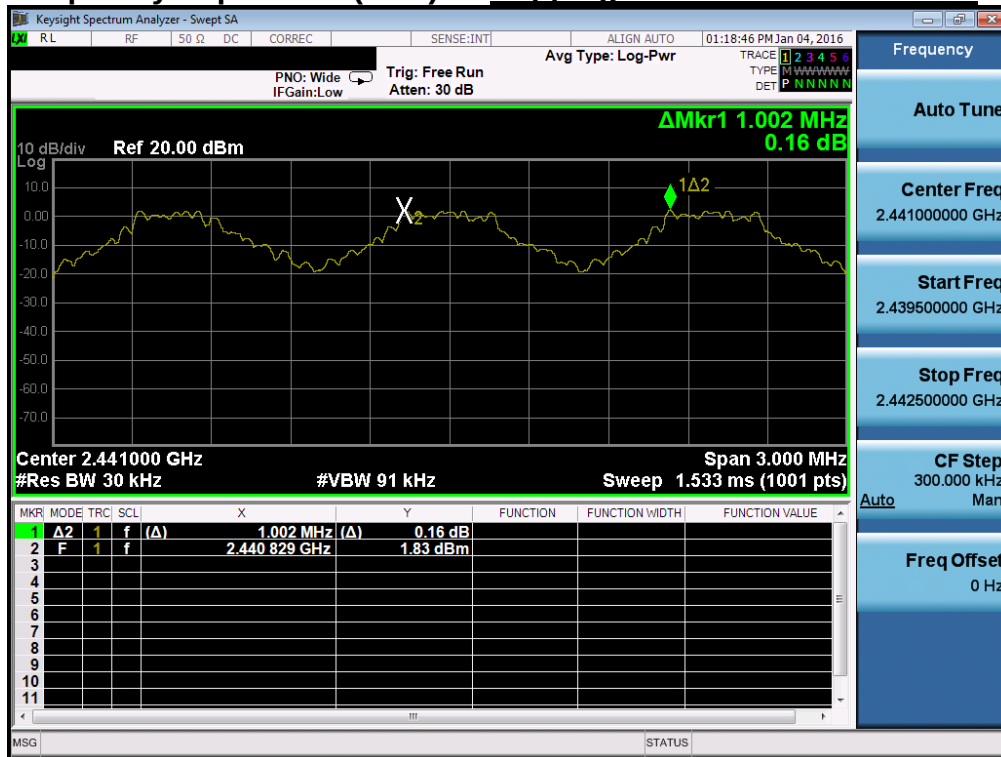
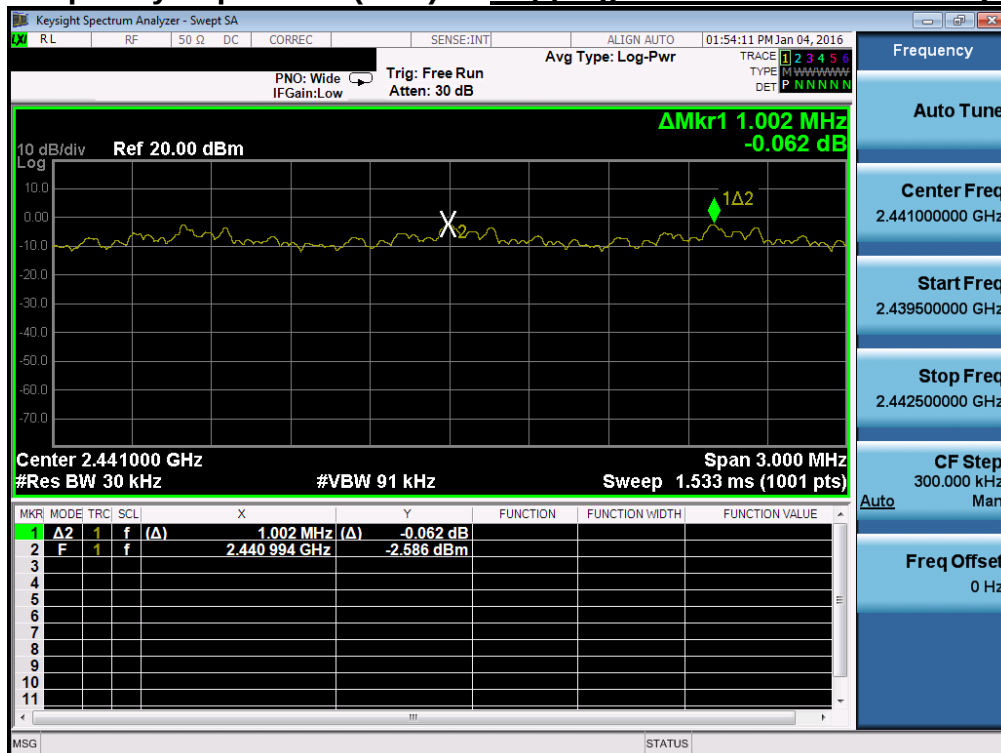
Carrier Frequency Separation (FH)***Hopping mode : Enable & GFSK*****Carrier Frequency Separation (FH)*****Hopping mode : Enable & $\pi/4$ -DQPSK***



Carrier Frequency Separation (FH)

Hopping mode : Enable & 8DPSK



Carrier Frequency Separation (AFH) *Hopping mode : Enable & GFSK***Carrier Frequency Separation (AFH) *Hopping mode : Enable & $\pi/4$ -DQPSK***

Carrier Frequency Separation (AFH) *Hopping mode : Enable & 8DPSK*