


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: RUCKY2 #151
Standard: FCC PART 15B (PK)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 49 %
EUT: Tablet PC
Mode: TX802.11B (CH1)
Model: PC7009
Manufacturer: Kintech Co.,Ltd

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 12/10/13/
Time: 4/46/27
Engineer Signature: Ricky
Distance: 3m

Note:

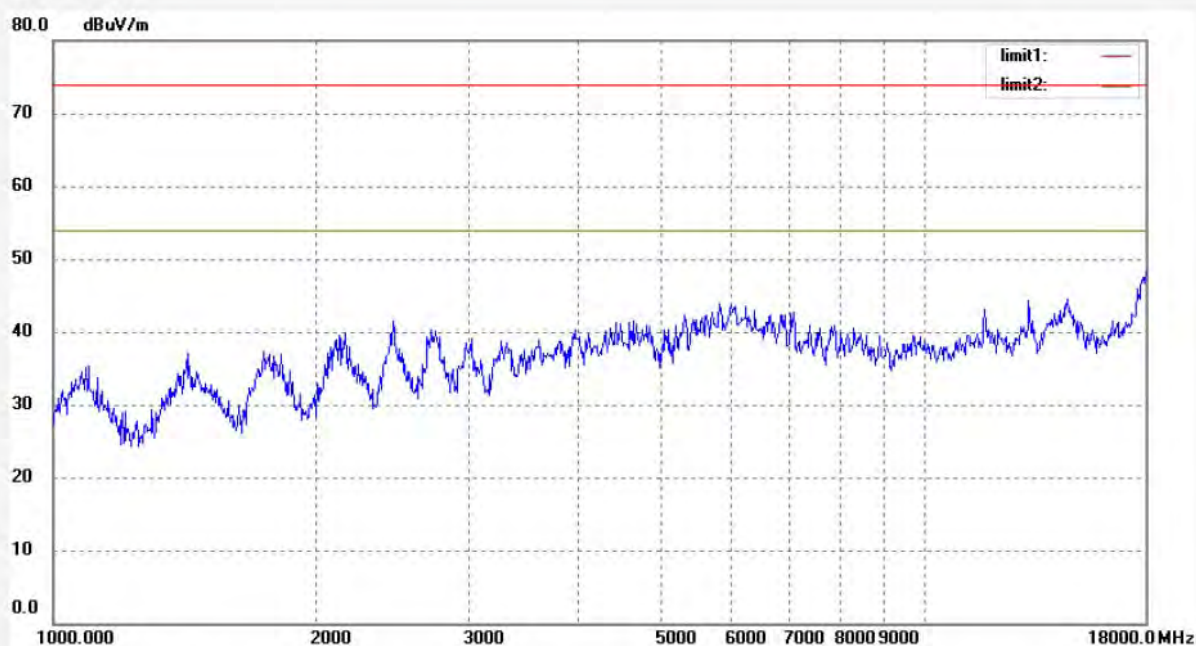

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: RUCKY2 #152
Standard: FCC PART 15B (PK)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 49 %
EUT: Tablet PC
Mode: TX802.11B (CH1)
Model: PC7009
Manufacturer: Kintech Co.,Ltd

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 12/10/13/
Time: 4/48/55
Engineer Signature: Ricky
Distance: 3m

Note:

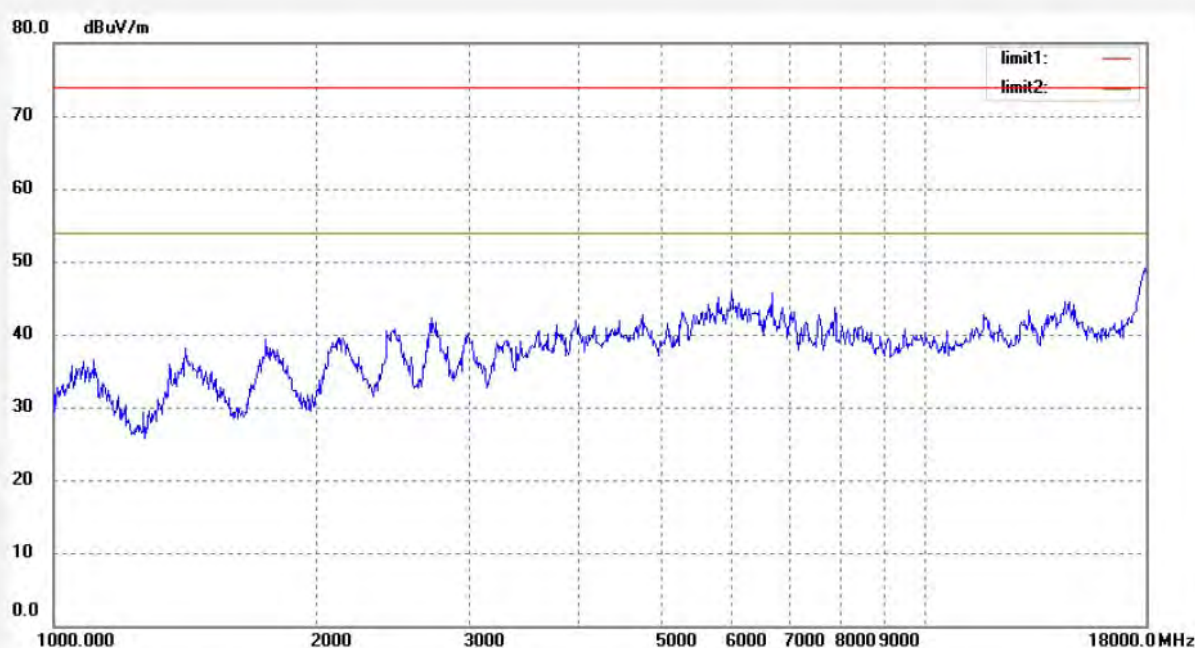

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: RUCKY2 #153
Standard: FCC PART 15B (PK)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 49 %
EUT: Tablet PC
Mode: TX802.11B (CH6)
Model: PC7009
Manufacturer: Kintech Co.,Ltd

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 12/10/13/
Time: 4/51/14
Engineer Signature: Ricky
Distance: 3m

Note:

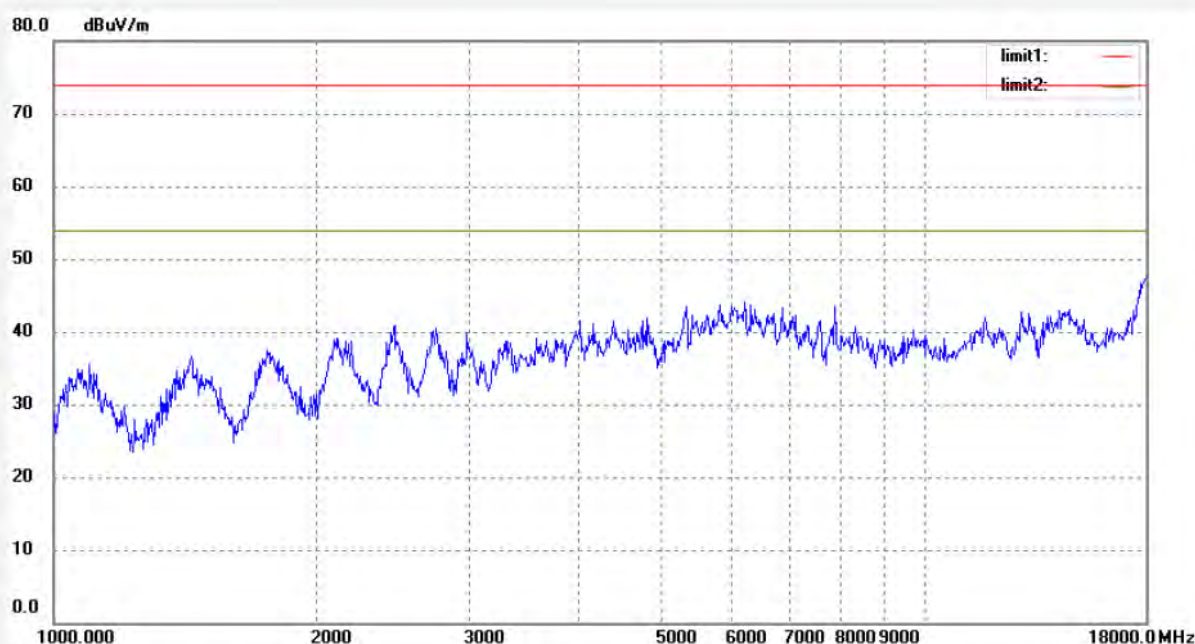

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: RUCKY2 #154

Standard: FCC PART 15B (PK)

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX802.11B (CH6)

Model: PC7009

Manufacturer: Kintech Co.,Ltd

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/10/13/

Time: 4/53/06

Engineer Signature: Ricky

Distance: 3m

Note:

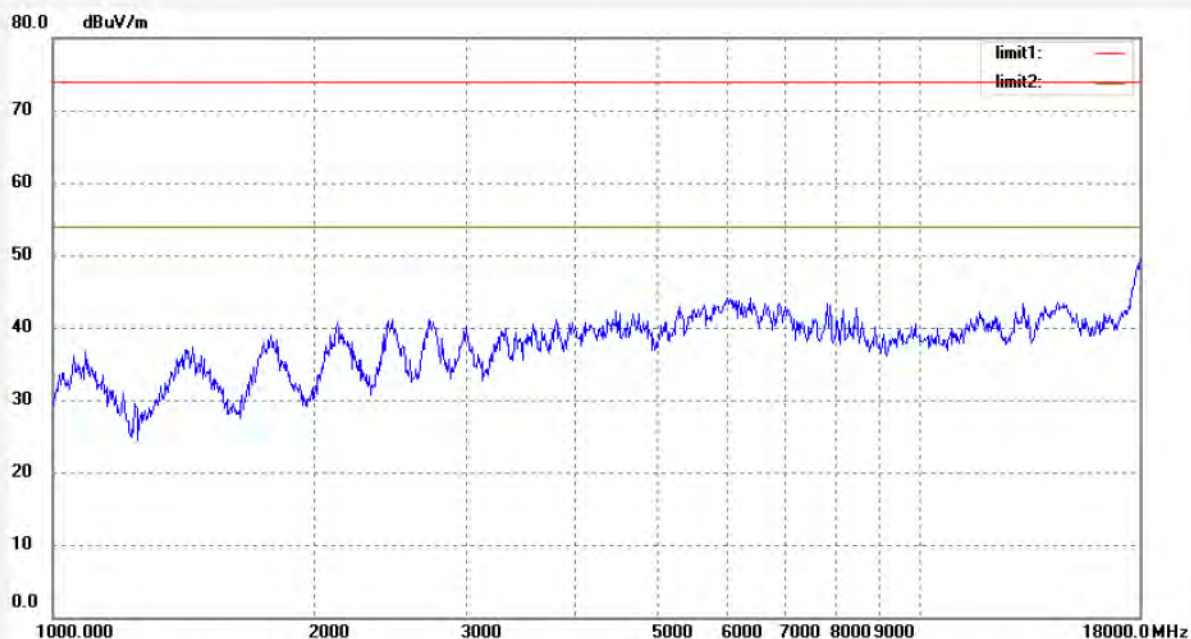

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: RUCKY2 #155
Standard: FCC PART 15B (PK)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 49 %
EUT: Tablet PC
Mode: TX802.11B (CH11)
Model: PC7009
Manufacturer: Kintech Co.,Ltd

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 12/10/13/
Time: 4/56/17
Engineer Signature: Ricky
Distance: 3m

Note:

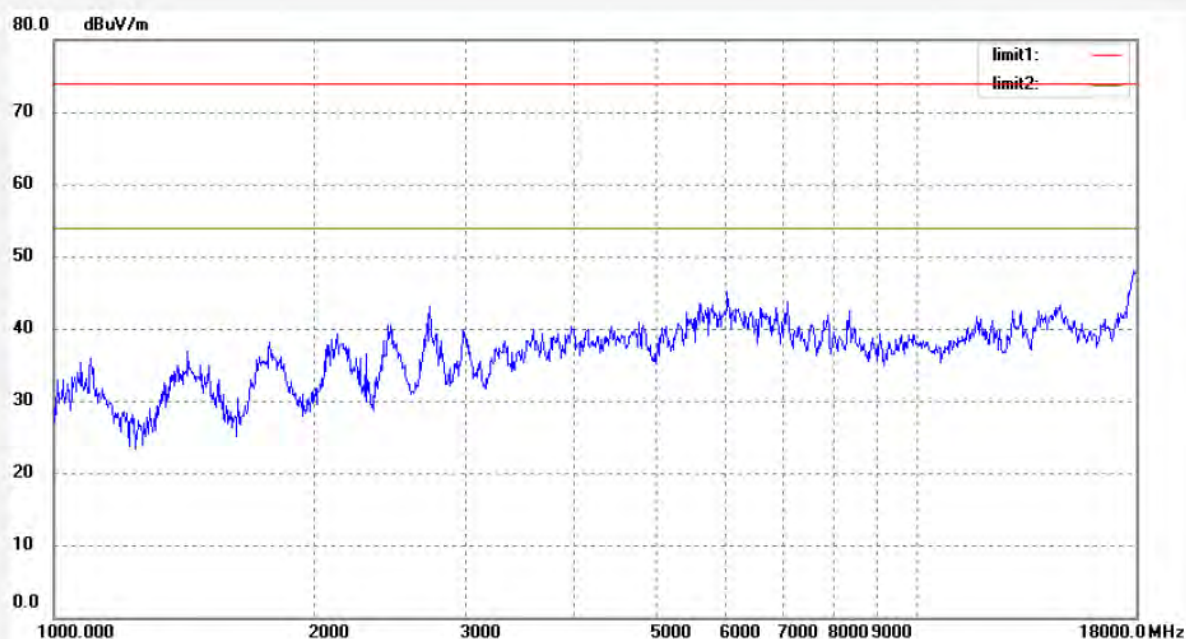

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: RUCKY2 #156

Standard: FCC PART 15B (PK)

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX802.11B (CH11)

Model: PC7009

Manufacturer: Kintech Co.,Ltd

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/10/13/

Time: 4/59/34

Engineer Signature: Ricky

Distance: 3m

Note:

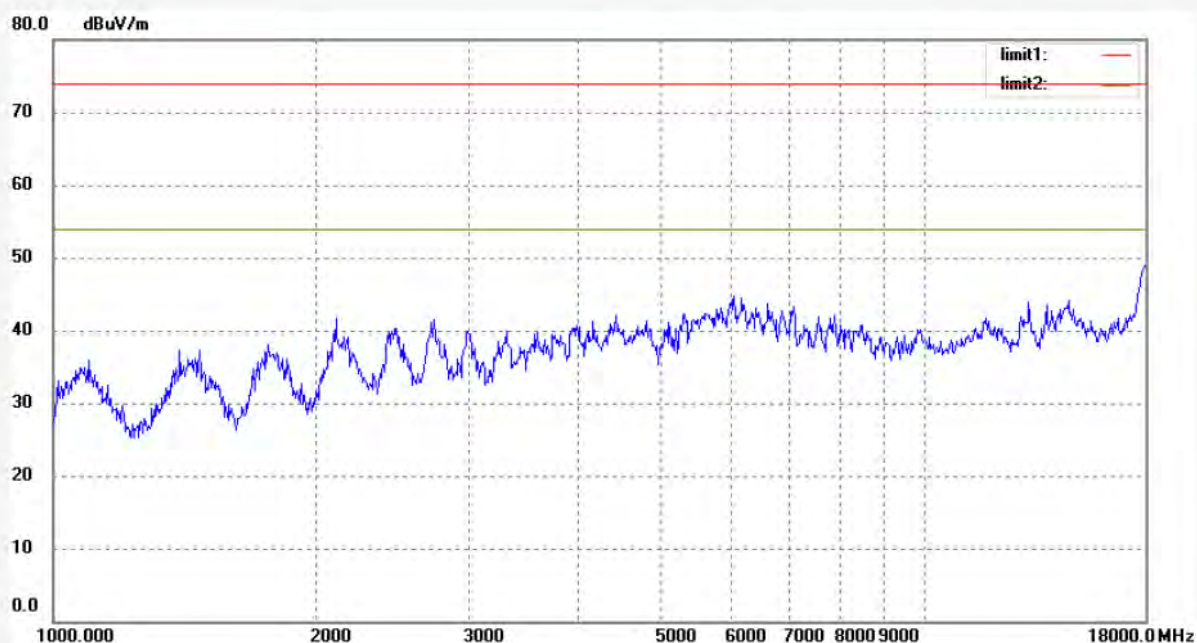

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: RUCKY2 #145
Standard: FCC PART 15B (PK)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 49 %
EUT: Tablet PC
Mode: TX802.11G (CH1)
Model: PC7009
Manufacturer: Kintech Co.,Ltd

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 12/10/13/
Time: 4/29/09
Engineer Signature: Ricky
Distance: 3m

Note:

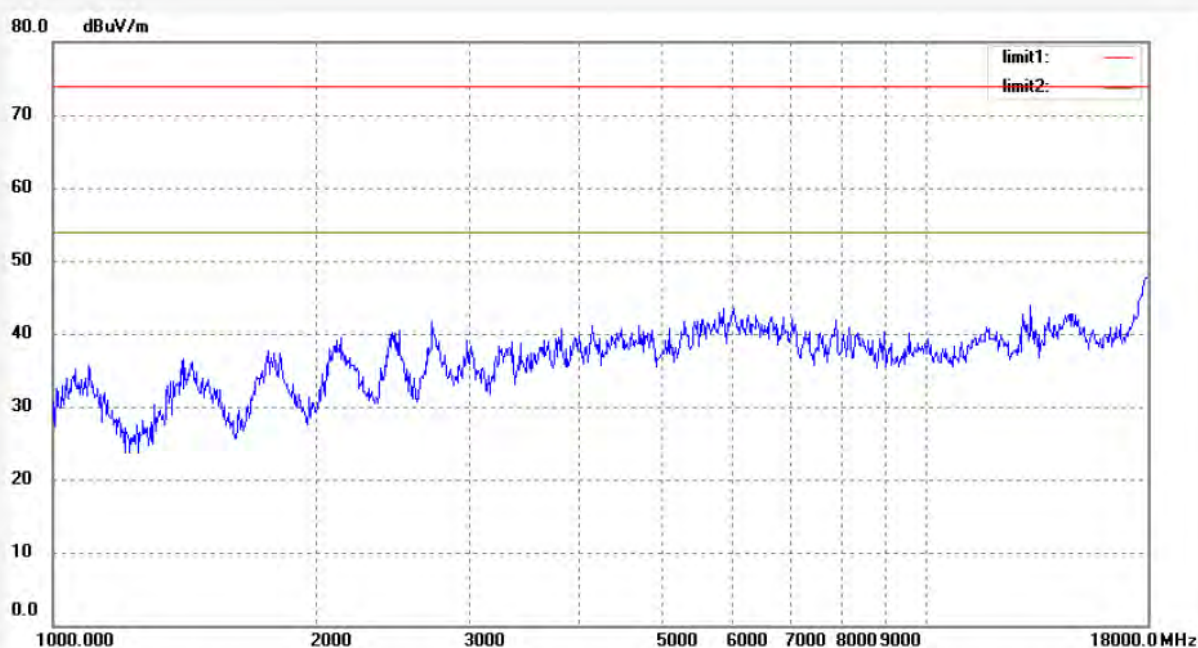

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: RUCKY2 #146
Standard: FCC PART 15B (PK)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 49 %
EUT: Tablet PC
Mode: TX802.11G (CH1)
Model: PC7009
Manufacturer: Kintech Co.,Ltd

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 12/10/13/
Time: 4/32/21
Engineer Signature: Ricky
Distance: 3m

Note:

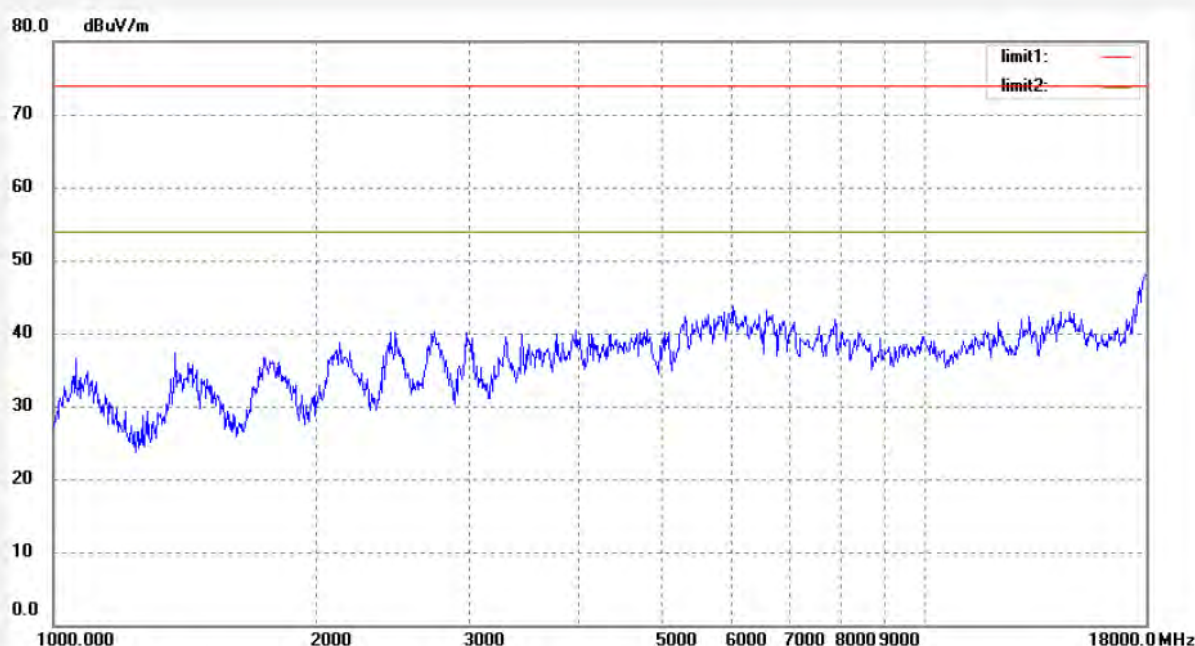

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: RUCKY2 #147
Standard: FCC PART 15B (PK)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 49 %
EUT: Tablet PC
Mode: TX802.11G (CH6)
Model: PC7009
Manufacturer: Kintech Co.,Ltd

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 12/10/13/
Time: 4/35/30
Engineer Signature: Ricky
Distance: 3m

Note:

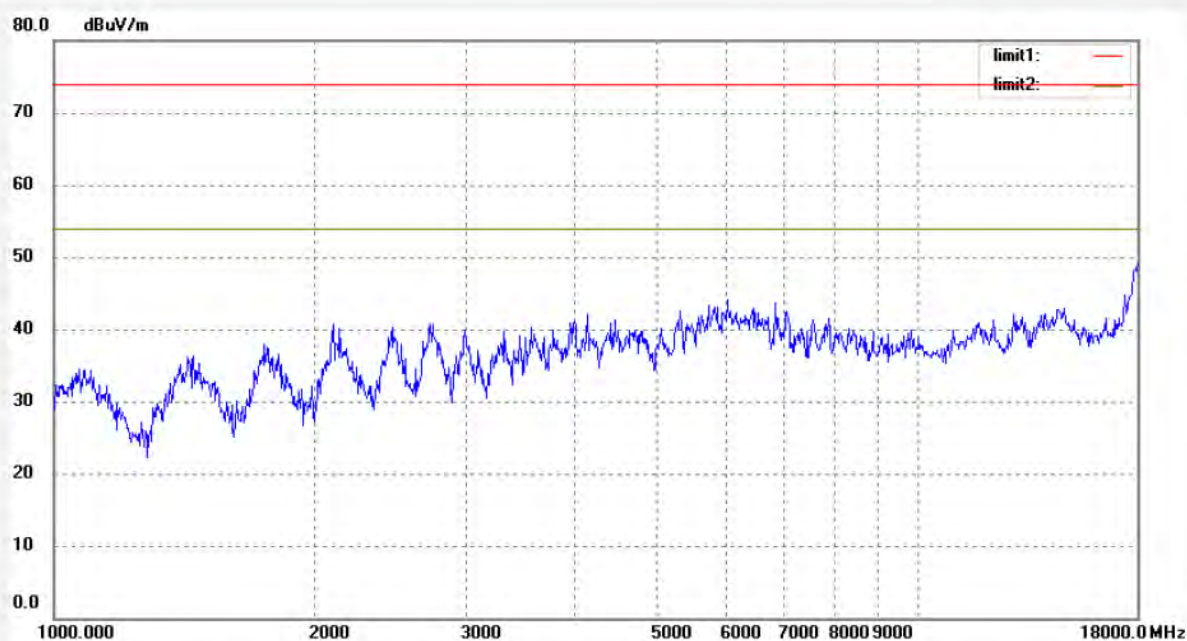

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: RUCKY2 #148
Standard: FCC PART 15B (PK)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 49 %
EUT: Tablet PC
Mode: TX802.11G (CH6)
Model: PC7009
Manufacturer: Kintech Co.,Ltd

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 12/10/13/
Time: 4/38/53
Engineer Signature: Ricky
Distance: 3m

Note:

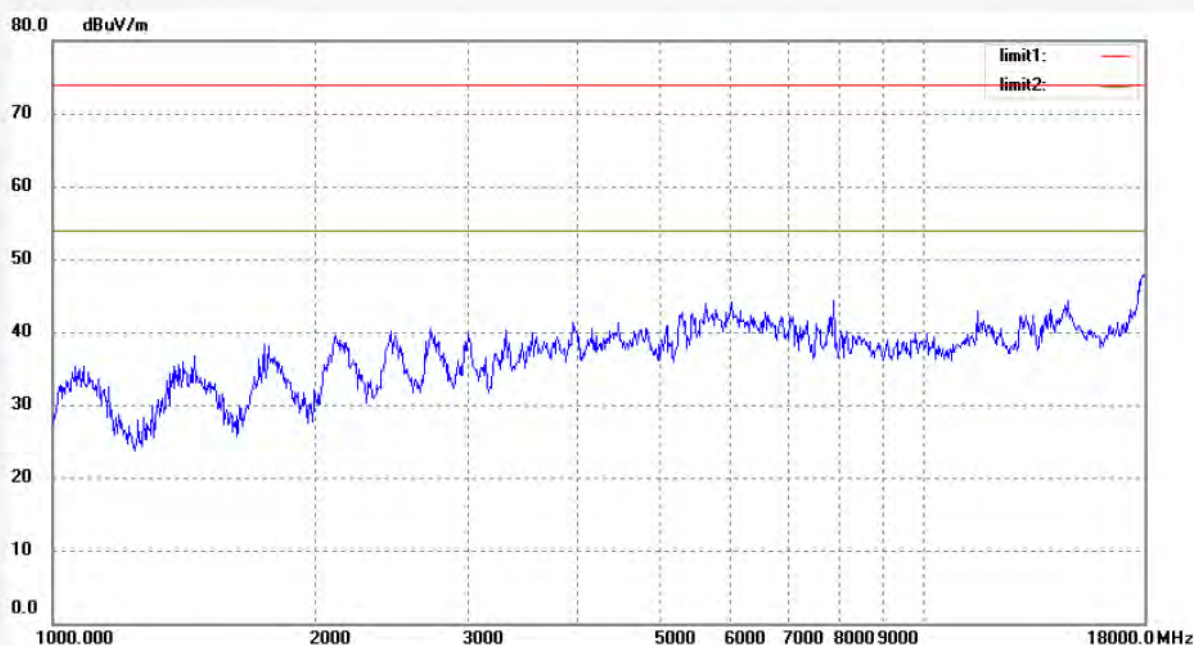

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: RUCKY2 #149
Standard: FCC PART 15B (PK)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 49 %
EUT: Tablet PC
Mode: TX802.11G (CH11)
Model: PC7009
Manufacturer: Kintech Co.,Ltd

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 12/10/13/
Time: 4/41/04
Engineer Signature: Ricky
Distance: 3m

Note:

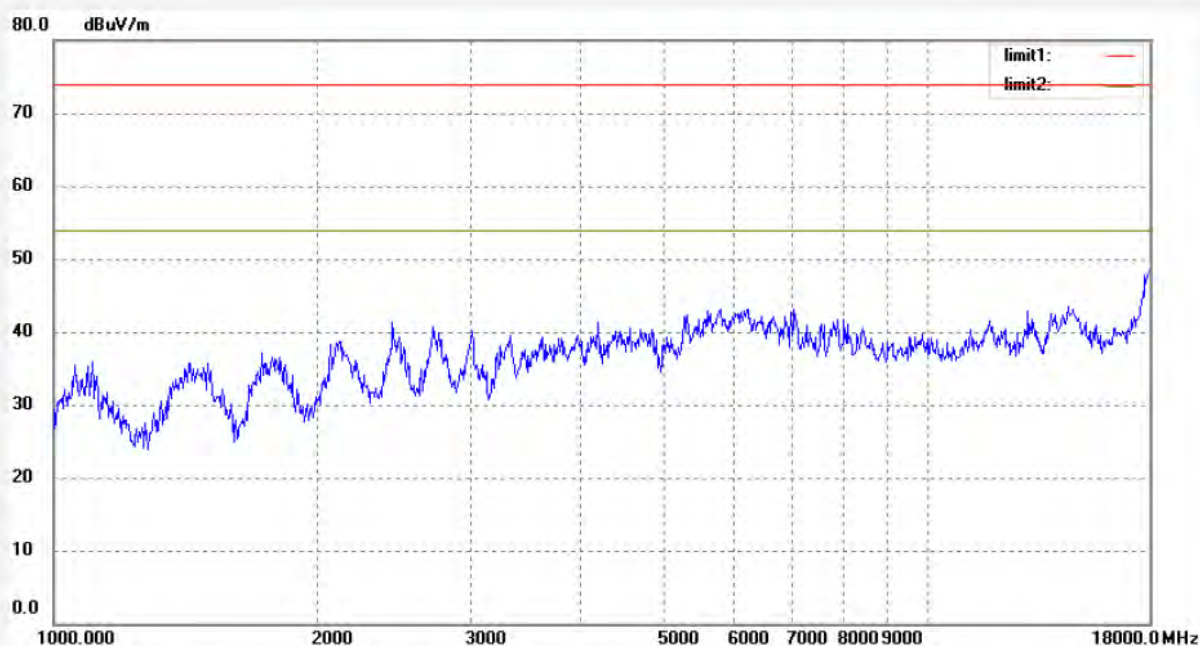

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: RUCKY2 #150
Standard: FCC PART 15B (PK)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 49 %
EUT: Tablet PC
Mode: TX802.11G (CH11)
Model: PC7009
Manufacturer: Kintech Co.,Ltd

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 12/10/13/
Time: 4/44/15
Engineer Signature: Ricky
Distance: 3m

Note:

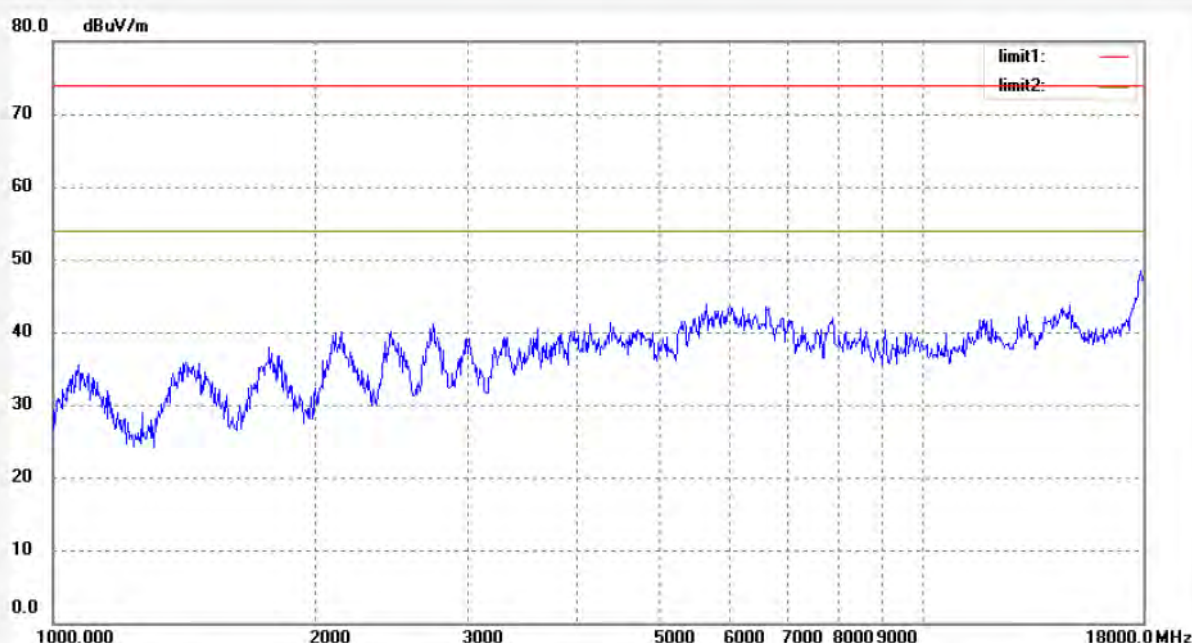

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: RUCKY2 #139
Standard: FCC PART 15B (PK)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 49 %
EUT: Tablet PC
Mode: TX802.11N20 (CH1)
Model: PC7009
Manufacturer: Kintech Co.,Ltd

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 12/10/13/
Time: 4/08/07
Engineer Signature: Ricky
Distance: 3m

Note:

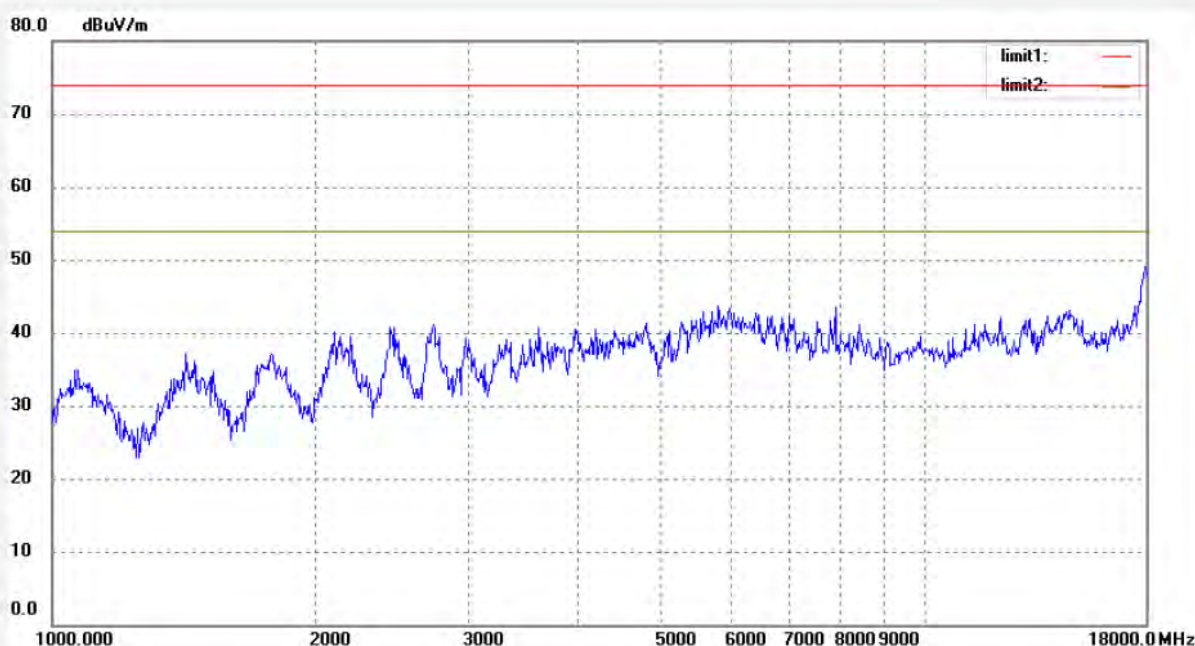

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: RUCKY2 #140
Standard: FCC PART 15B (PK)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 49 %
EUT: Tablet PC
Mode: TX802.11N20 (CH1)
Model: PC7009
Manufacturer: Kintech Co.,Ltd

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 12/10/13/
Time: 4/13/17
Engineer Signature: Ricky
Distance: 3m

Note:

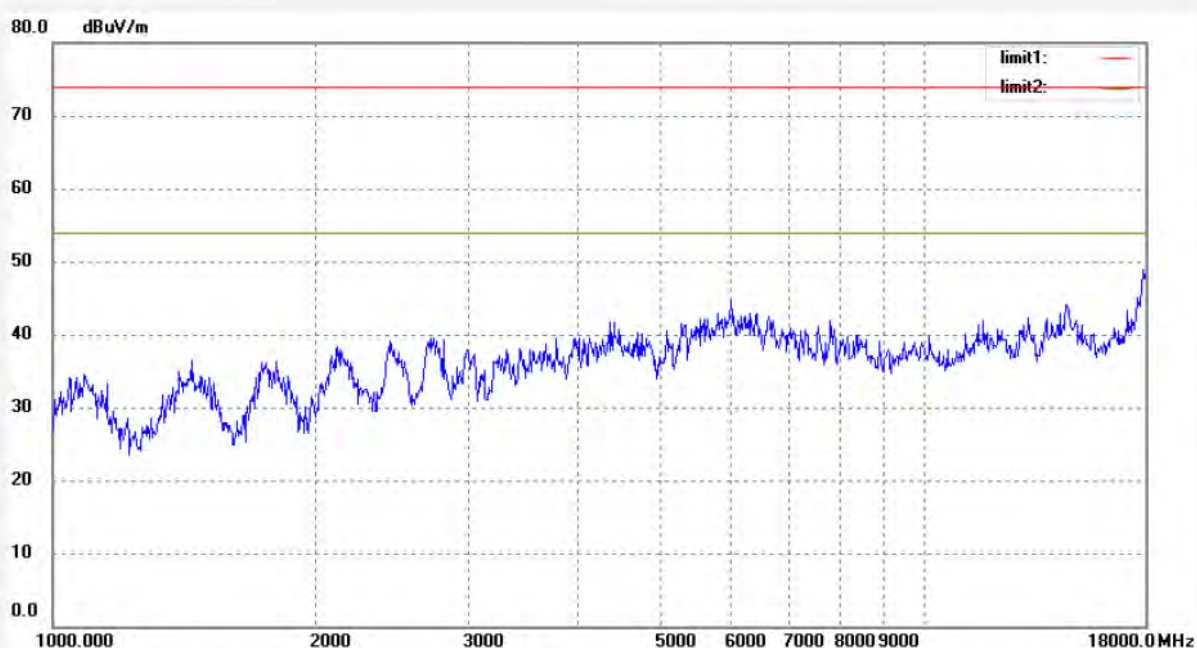

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: RUCKY2 #141
Standard: FCC PART 15B (PK)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 49 %
EUT: Tablet PC
Mode: TX802.11N20 (CH6)
Model: PC7009
Manufacturer: Kintech Co.,Ltd

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 12/10/13/
Time: 4/16/29
Engineer Signature: Ricky
Distance: 3m

Note:

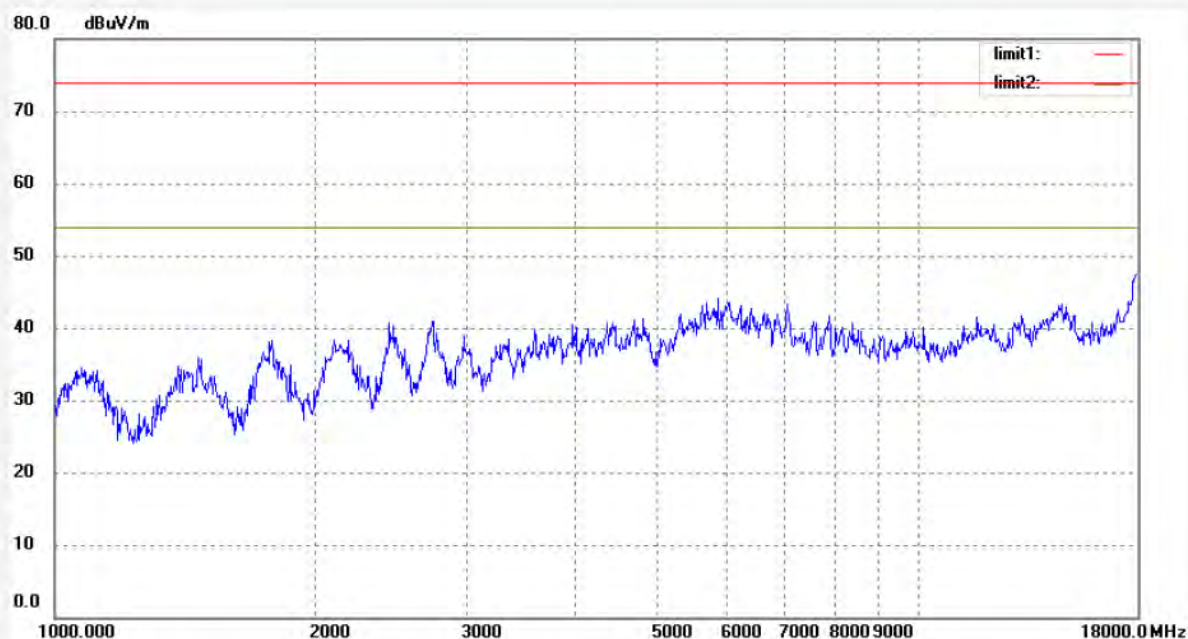

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: RUCKY2 #142

Standard: FCC PART 15B (PK)

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX802.11N20 (CH6)

Model: PC7009

Manufacturer: Kintech Co.,Ltd

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/10/13/

Time: 4/19/02

Engineer Signature: Ricky

Distance: 3m

Note:

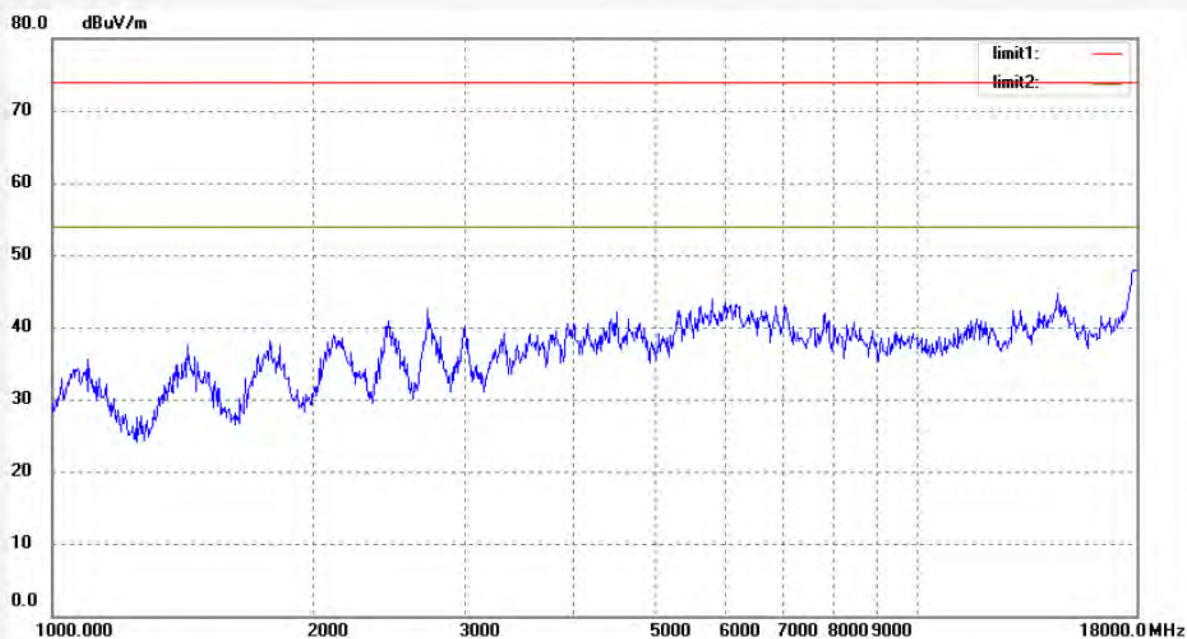

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: RUCKY2 #143
Standard: FCC PART 15B (PK)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 49 %
EUT: Tablet PC
Mode: TX802.11N20 (CH11)
Model: PC7009
Manufacturer: Kintech Co.,Ltd

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 12/10/13/
Time: 4/23/30
Engineer Signature: Ricky
Distance: 3m

Note:

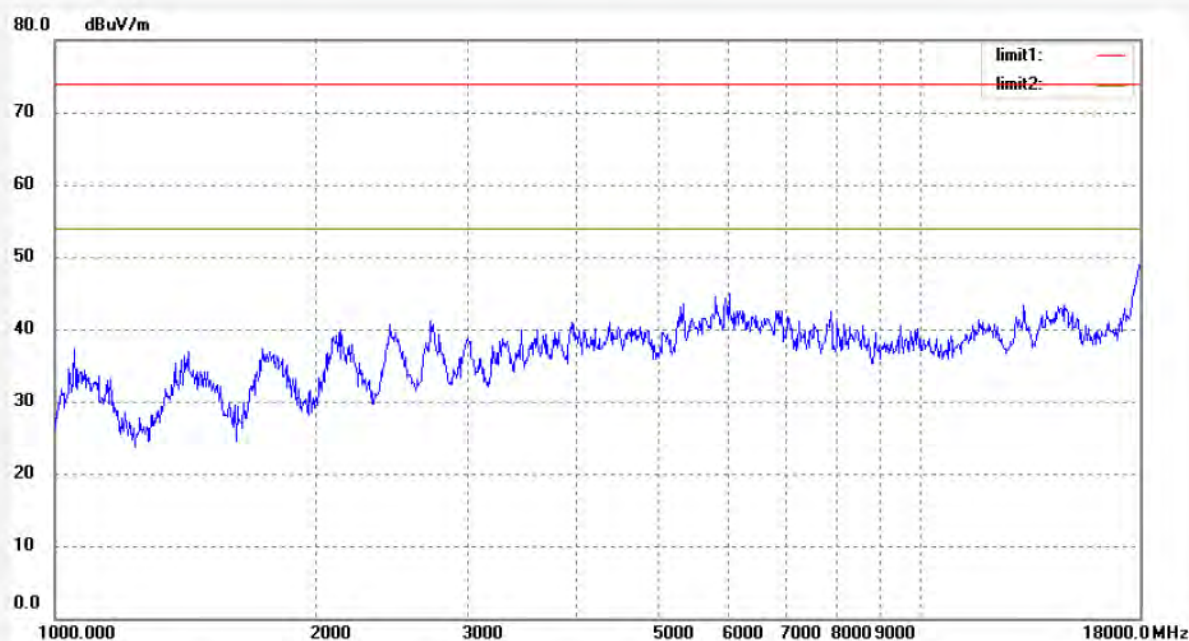

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: RUCKY2 #144	Polarization: Horizontal
Standard: FCC PART 15B (PK)	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/13/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 4/26/42
EUT: Tablet PC	Engineer Signature: Ricky
Mode: TX802.11N20 (CH11)	Distance: 3m
Model: PC7009	
Manufacturer: Kintech Co.,Ltd	

Note:

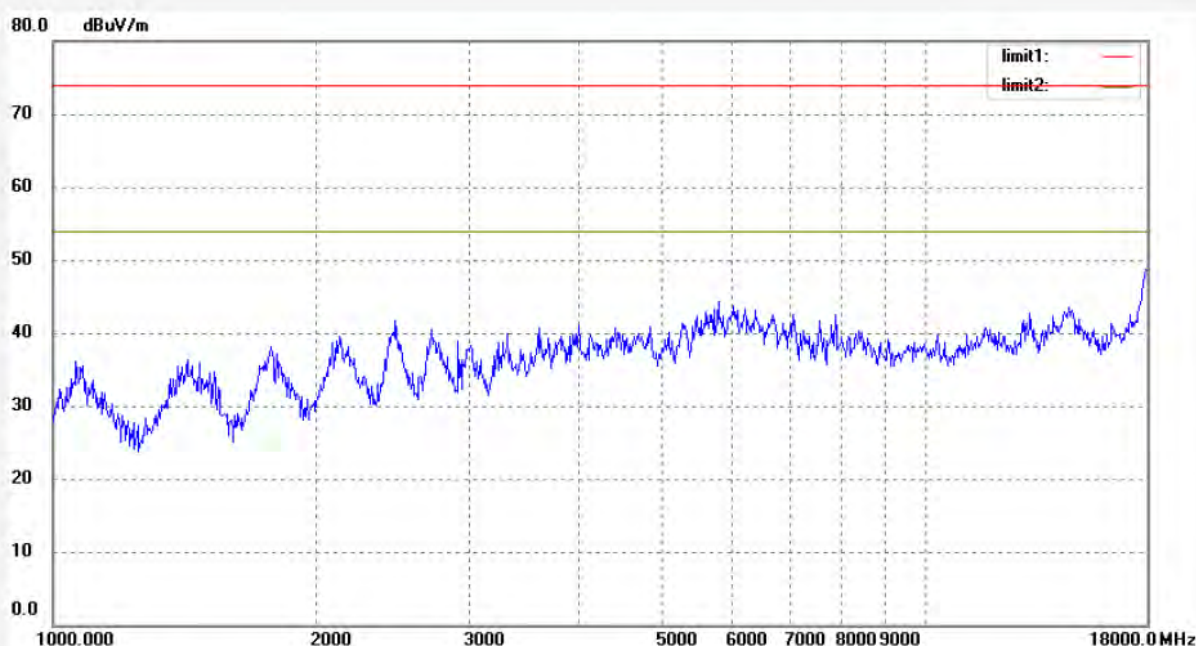

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: RUCKY2 #138
Standard: FCC PART 15B (PK)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 49 %
EUT: Tablet PC
Mode: TX802.11N40 (CH3)
Model: PC7009
Manufacturer: Kintech Co.,Ltd

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 12/10/13/
Time: 4/03/55
Engineer Signature: Ricky
Distance: 3m

Note:

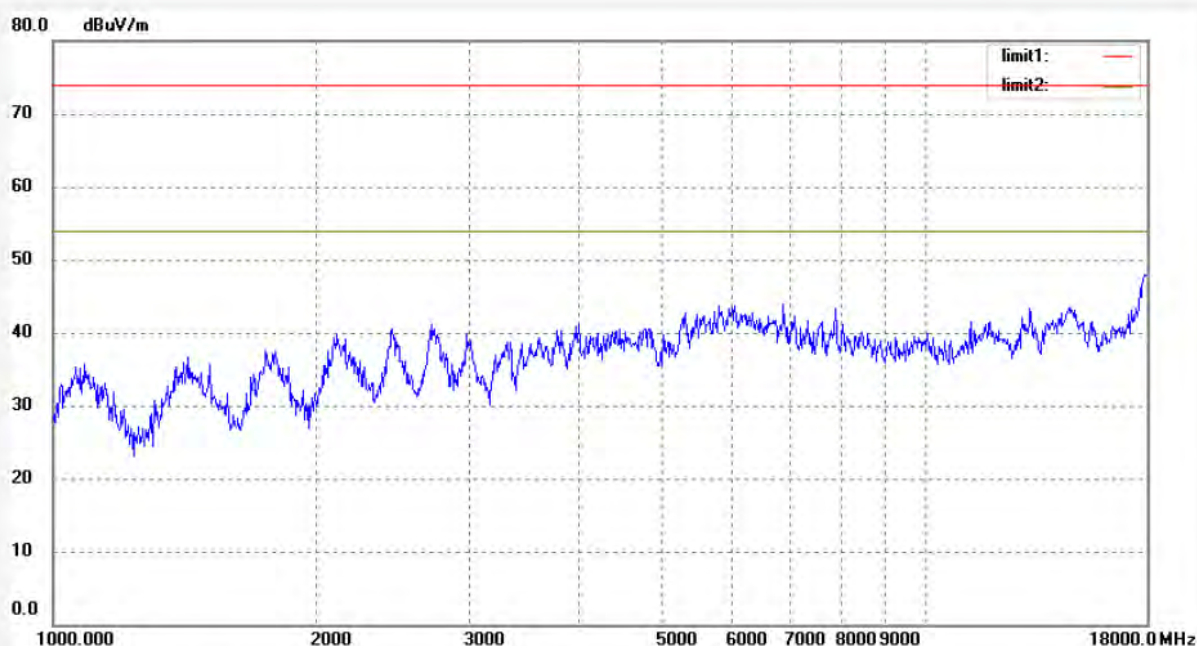

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: RUCKY2 #137
Standard: FCC PART 15B (PK)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 49 %
EUT: Tablet PC
Mode: TX802.11N40 (CH3)
Model: PC7009
Manufacturer: Kintech Co.,Ltd

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 12/10/13/
Time: 3/58/43
Engineer Signature: Ricky
Distance: 3m

Note:

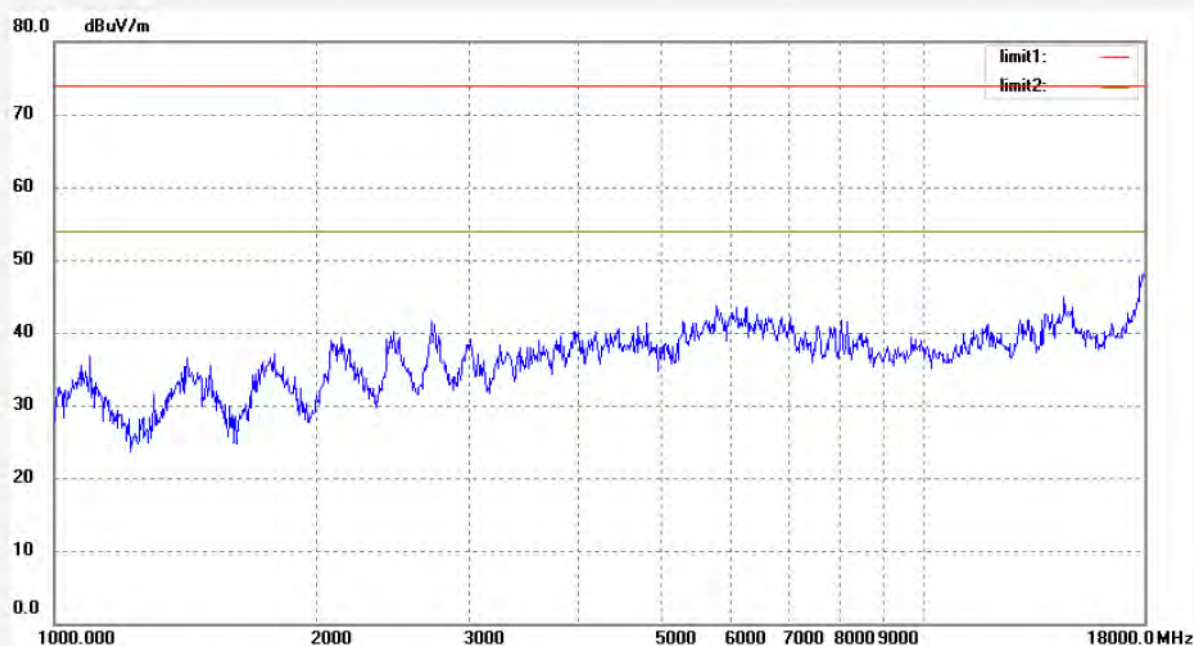

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: RUCKY2 #136
Standard: FCC PART 15B (PK)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 49 %
EUT: Tablet PC
Mode: TX802.11N40 (CH6)
Model: PC7009
Manufacturer: Kintech Co.,Ltd

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 12/10/13/
Time: 3/54/32
Engineer Signature: Ricky
Distance: 3m

Note:

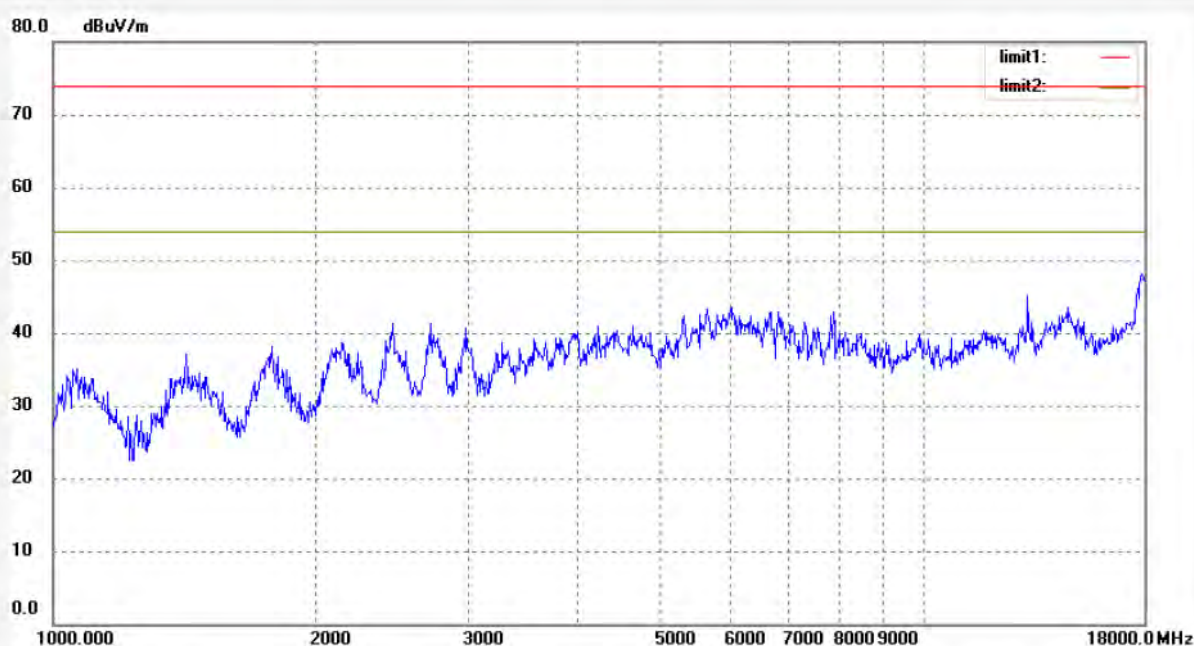

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: RUCKY2 #135
Standard: FCC PART 15B (PK)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 49 %
EUT: Tablet PC
Mode: TX802.11N40 (CH6)
Model: PC7009
Manufacturer: Kintech Co.,Ltd

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 12/10/13/
Time: 3/52/22
Engineer Signature: Ricky
Distance: 3m

Note:

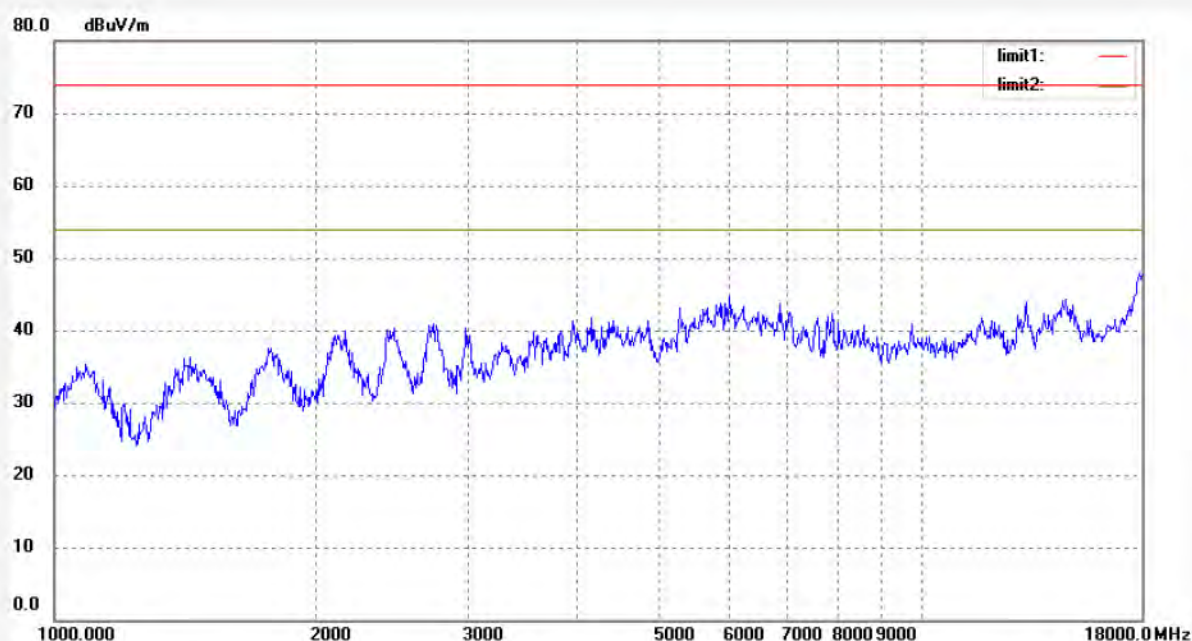

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: RUCKY2 #134
Standard: FCC PART 15B (PK)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 49 %
EUT: Tablet PC
Mode: TX802.11N40 (CH9)
Model: PC7009
Manufacturer: Kintech Co.,Ltd

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 12/10/13/
Time: 3/47/31
Engineer Signature: Ricky
Distance: 3m

Note:

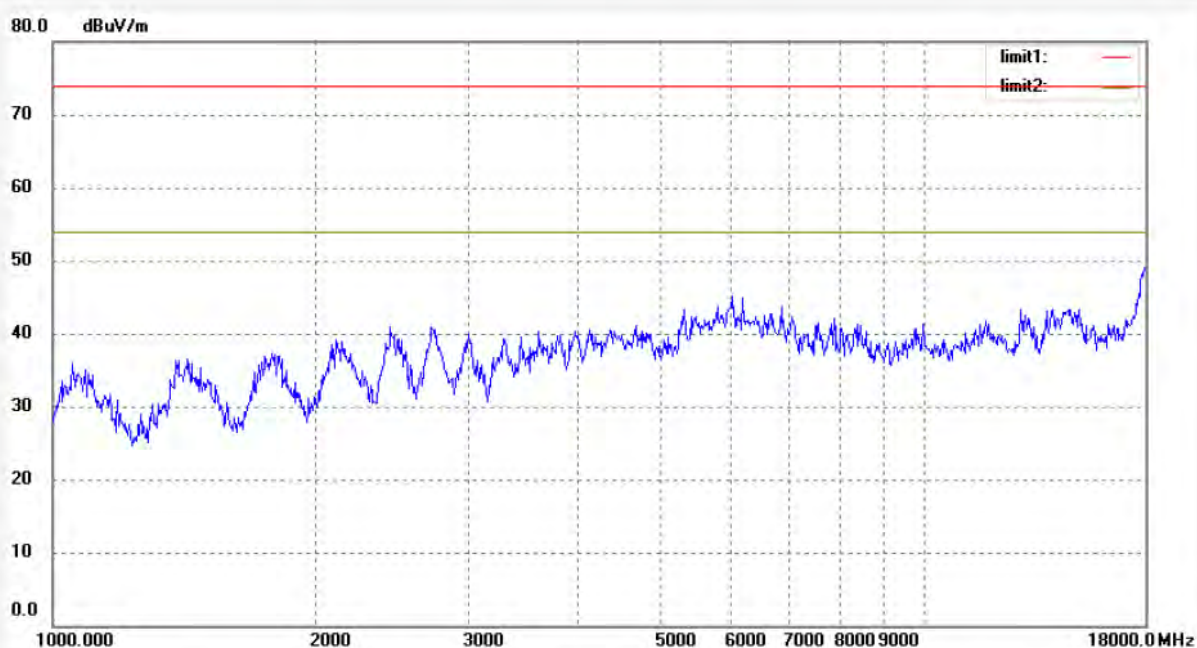

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: RUCKY2 #133

Standard: FCC PART 15B (PK)

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX802.11N40 (CH9)

Model: PC7009

Manufacturer: Kintech Co.,Ltd

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/10/13/

Time: 3/45/11

Engineer Signature: Ricky

Distance: 3m

Note:

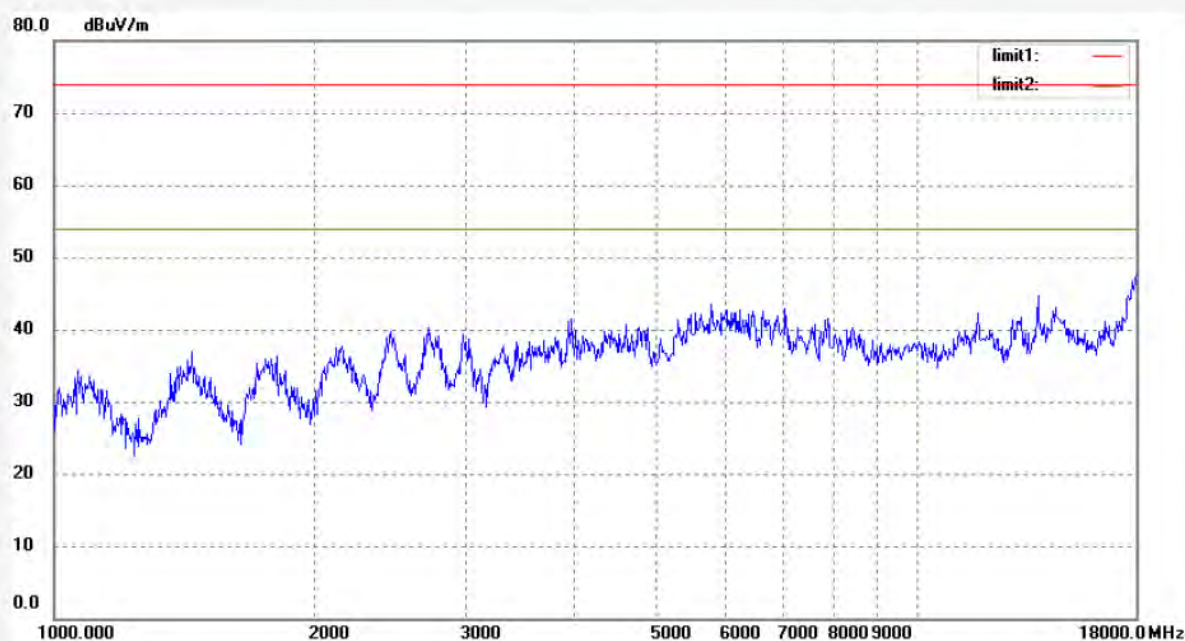

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ricky #894

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Tablet PC

Mode: TX 802.11B(CH1)

Model: PC7009

Manufacturer: Kintech Co.,Ltd

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/10/13/

Time: 7/22/55

Engineer Signature: Ricky

Distance: 3m

Note:

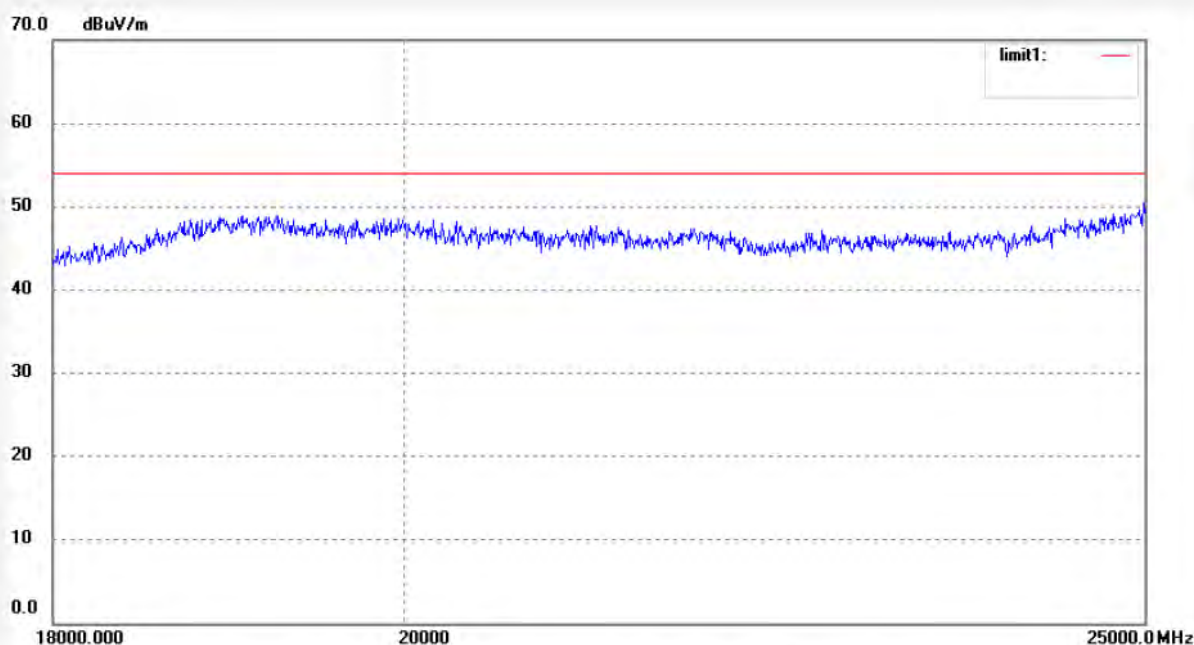

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Ricky #895	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/13/
Temp.(C)/Hum.(%) 25 C / 50 %	Time: 7/25/29
EUT: Tablet PC	Engineer Signature: Ricky
Mode: TX 802.11B(CH1)	Distance: 3m
Model: PC7009	
Manufacturer: Kintech Co.,Ltd	

Note:

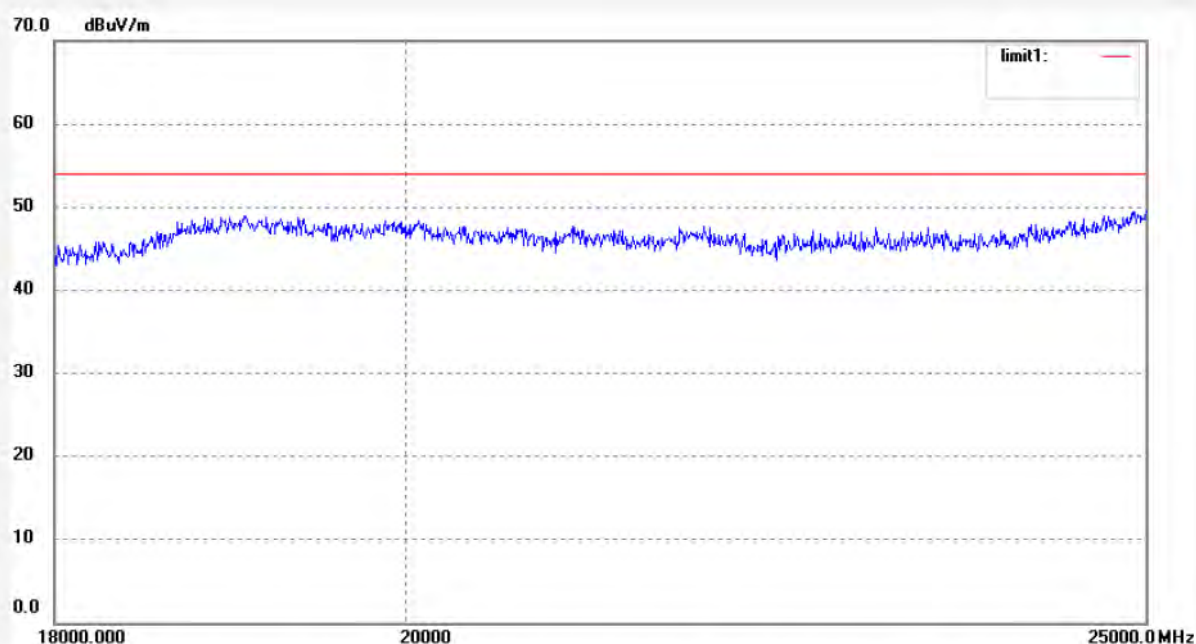

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Ricky #896	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/13/
Temp.(C)/Hum.(%) 25 C / 50 %	Time: 7/30/18
EUT: Tablet PC	Engineer Signature: Ricky
Mode: TX 802.11B(CH6)	Distance: 3m
Model: PC7009	
Manufacturer: Kintech Co.,Ltd	

Note:

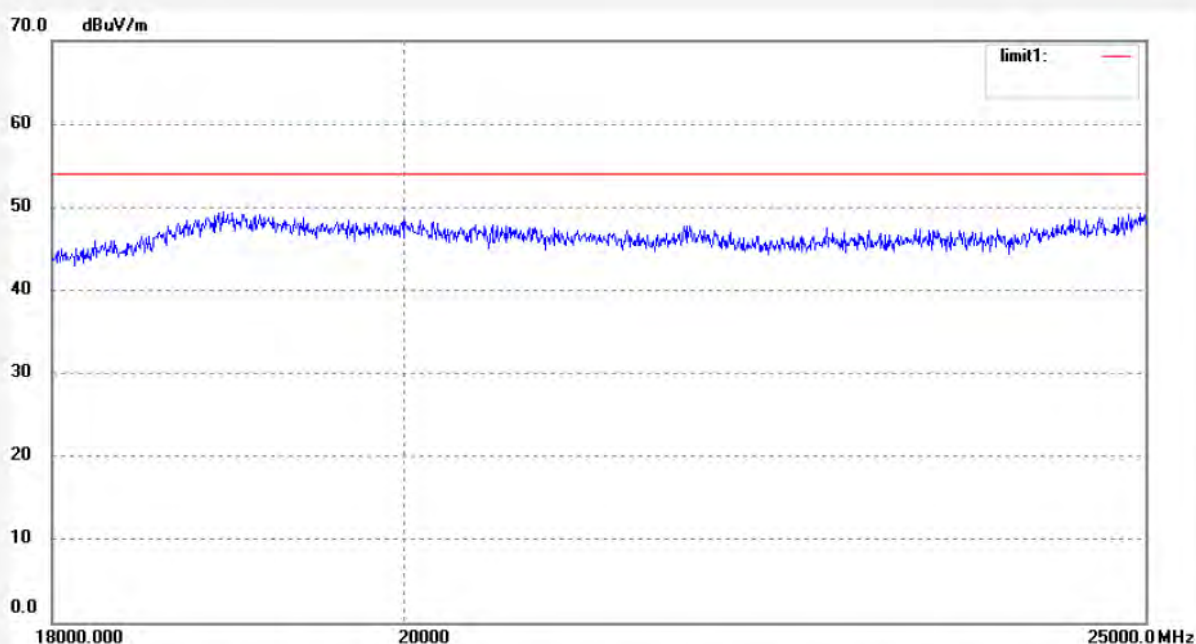

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Ricky #897

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Tablet PC

Mode: TX 802.11B(CH6)

Model: PC7009

Manufacturer: Kintech Co.,Ltd

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/10/13/

Time: 7/33/25

Engineer Signature: Ricky

Distance: 3m

Note:

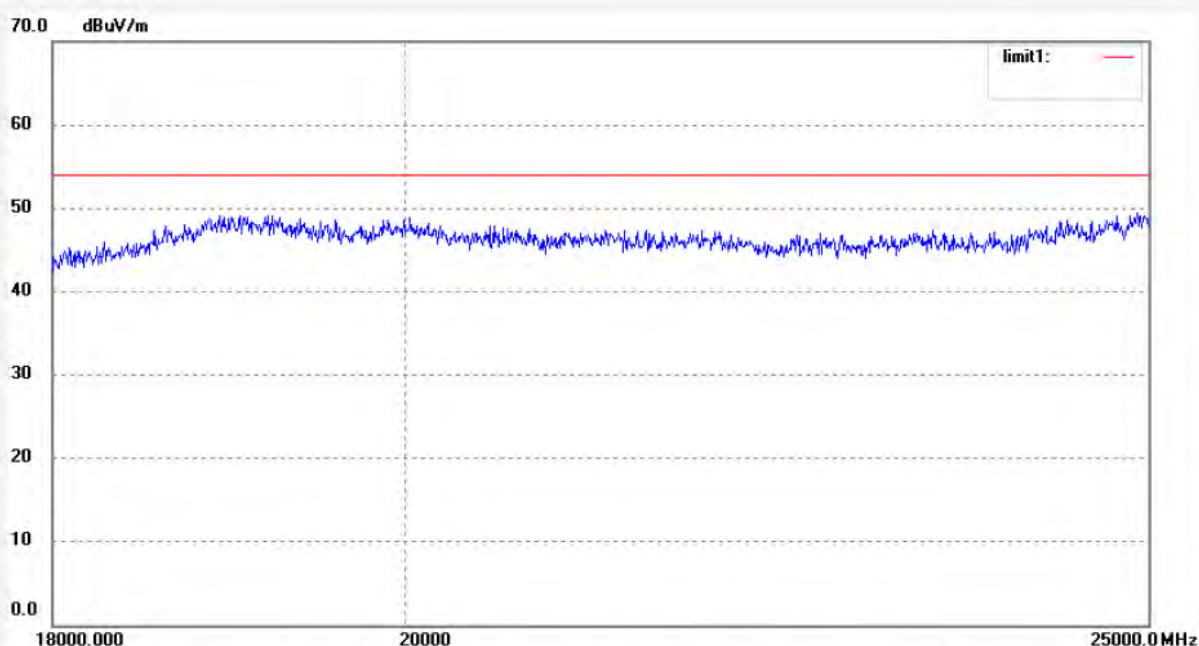

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Ricky #898	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/13/
Temp.(C)/Hum.(%) 25 C / 50 %	Time: 7/37/45
EUT: Tablet PC	Engineer Signature: Ricky
Mode: TX 802.11B(CH11)	Distance: 3m
Model: PC7009	
Manufacturer: Kintech Co.,Ltd	

Note:

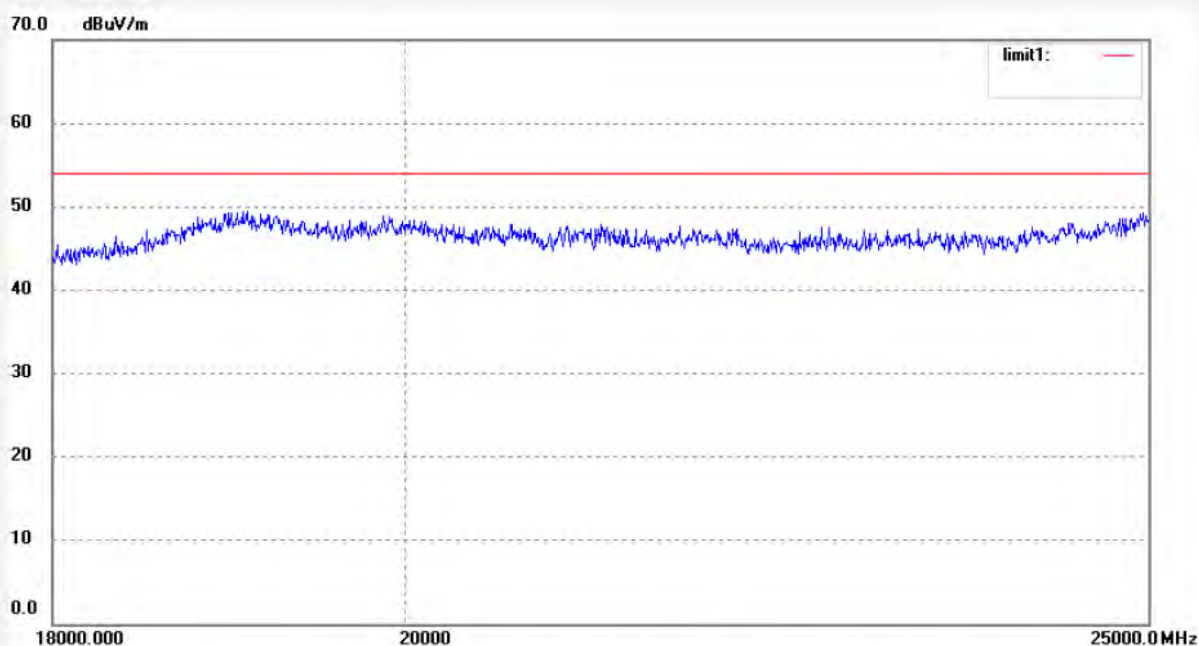

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Ricky #899	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/13/
Temp.(C)/Hum.(%) 25 C / 50 %	Time: 7/40/03
EUT: Tablet PC	Engineer Signature: Ricky
Mode: TX 802.11B(CH11)	Distance: 3m
Model: PC7009	
Manufacturer: Kintech Co.,Ltd	

Note:

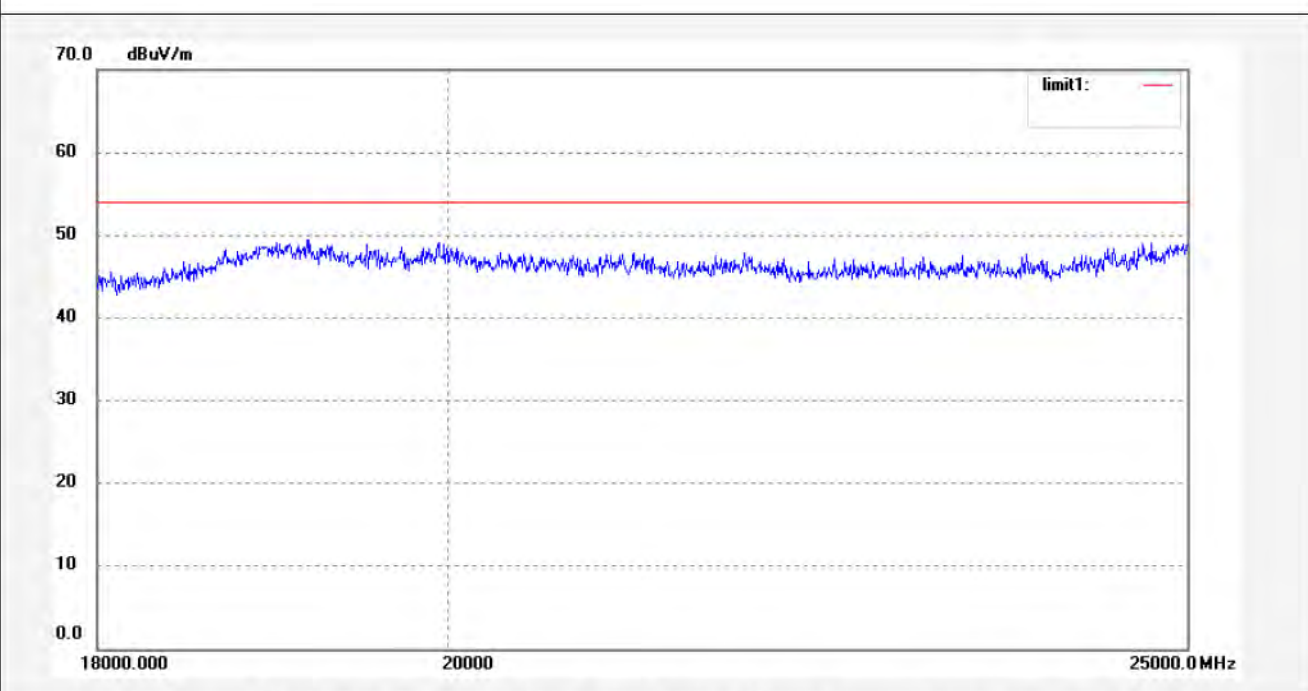

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ricky #900

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Tablet PC

Mode: TX802.11G(CH1)

Model: PC7009

Manufacturer: Kintech Co.,Ltd

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/10/13/

Time: 8/06/15

Engineer Signature: Ricky

Distance: 3m

Note:

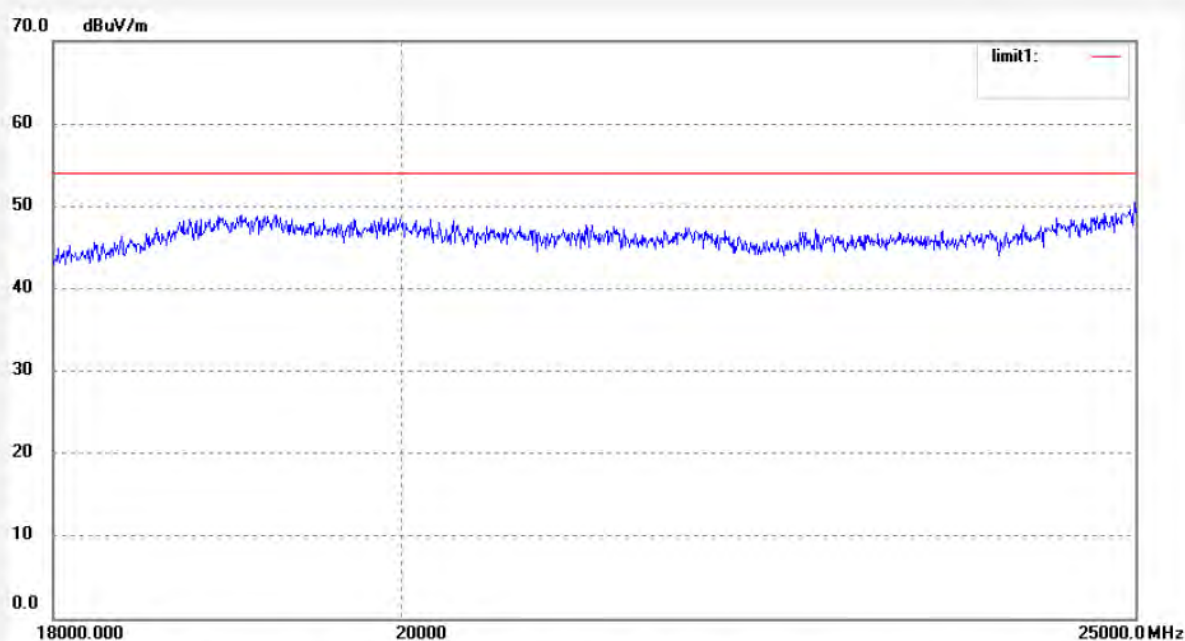

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Ricky #901	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/13/
Temp.(C)/Hum.(%) 25 C / 50 %	Time: 8/09/59
EUT: Tablet PC	Engineer Signature: Ricky
Mode: TX802.11G(CH1)	Distance: 3m
Model: PC7009	
Manufacturer: Kintech Co.,Ltd	

Note:

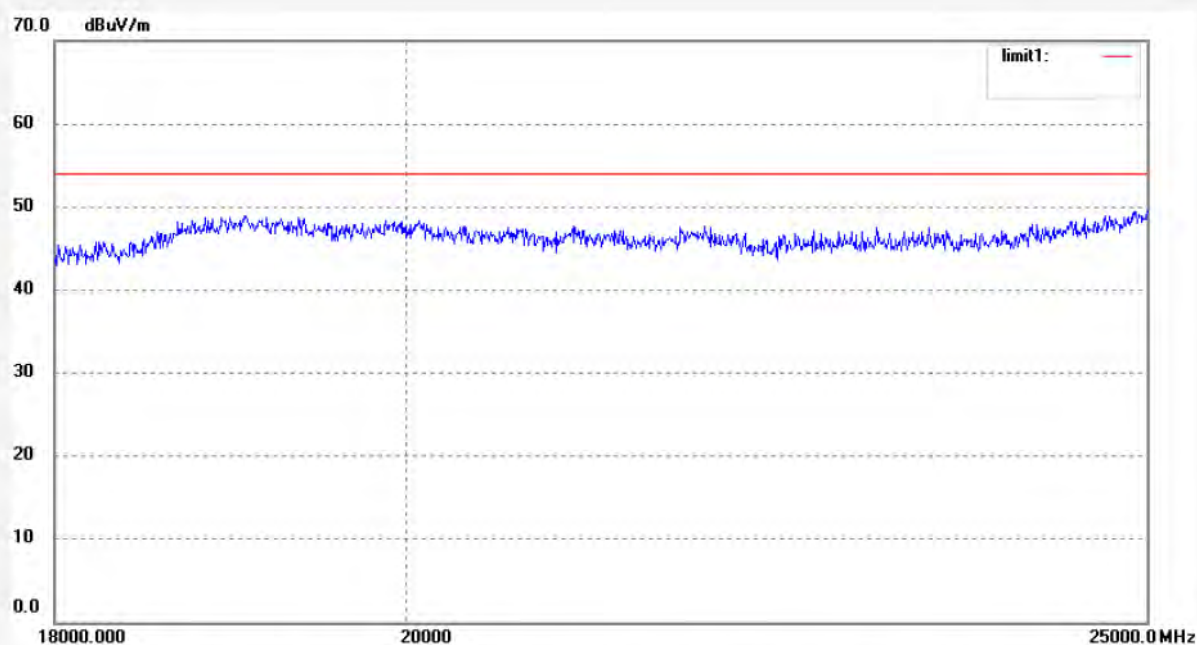

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Ricky #902

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Tablet PC

Mode: TX802.11G(CH6)

Model: PC7009

Manufacturer: Kintech Co.,Ltd

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/10/13/

Time: 8/12/23

Engineer Signature: Ricky

Distance: 3m

Note:

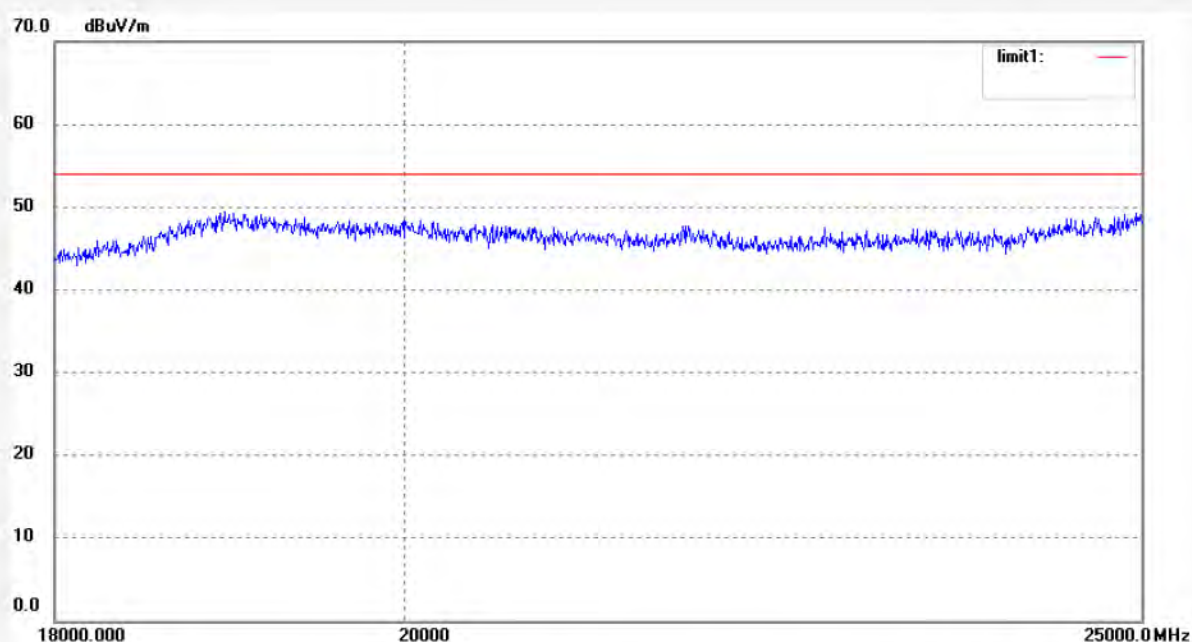

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Ricky #903

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Tablet PC

Mode: TX802.11G(CH6)

Model: PC7009

Manufacturer: Kintech Co.,Ltd

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/10/13/

Time: 8/16/44

Engineer Signature: Ricky

Distance: 3m

Note:

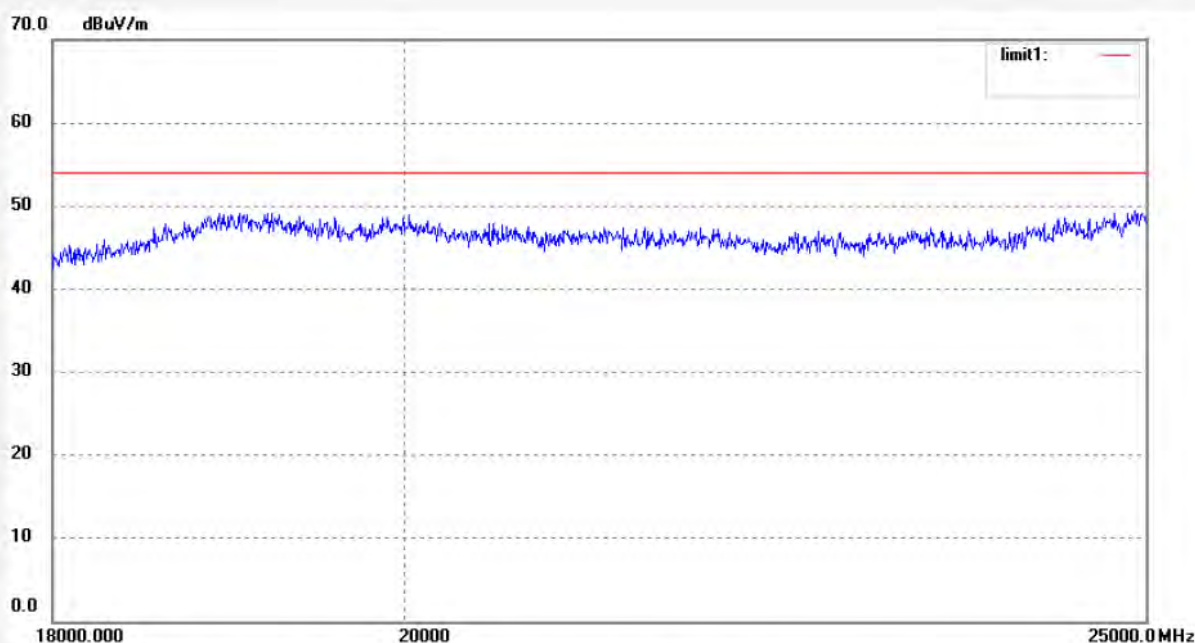

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Ricky #904	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/13/
Temp.(C)/Hum.(%) 25 C / 50 %	Time: 8/21/43
EUT: Tablet PC	Engineer Signature: Ricky
Mode: TX802.11G(CH11)	Distance: 3m
Model: PC7009	
Manufacturer: Kintech Co.,Ltd	

Note:

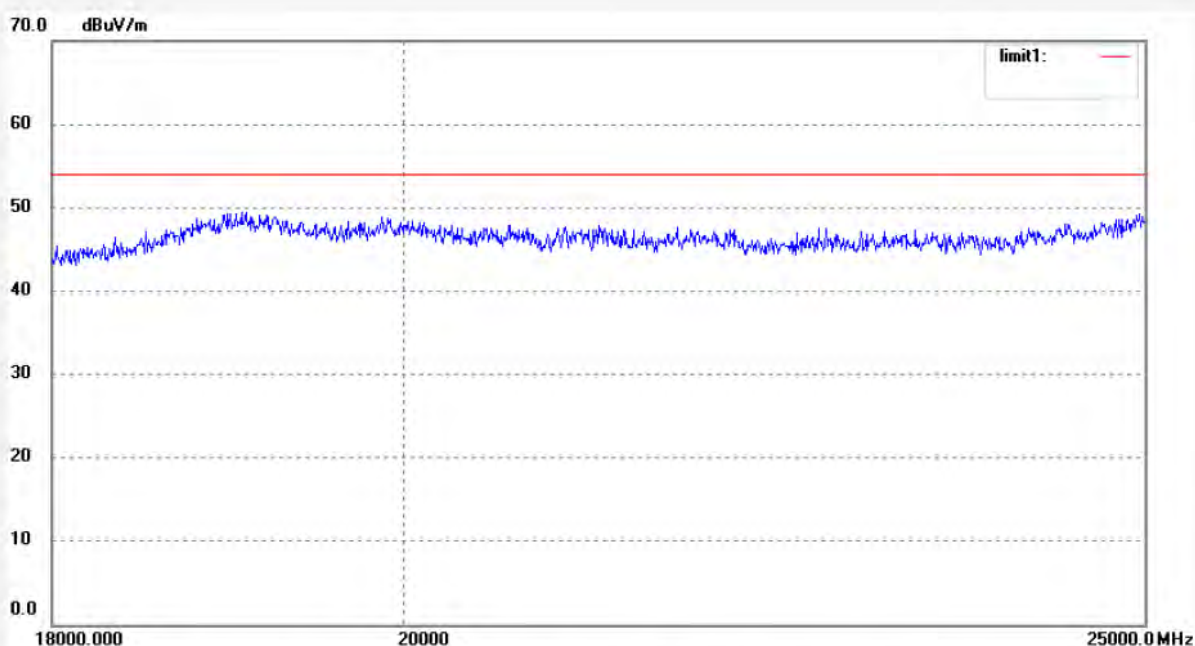

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Ricky #905

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Tablet PC

Mode: TX802.11G(CH11)

Model: PC7009

Manufacturer: Kintech Co.,Ltd

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/10/13/

Time: 8/24/37

Engineer Signature: Ricky

Distance: 3m

Note:

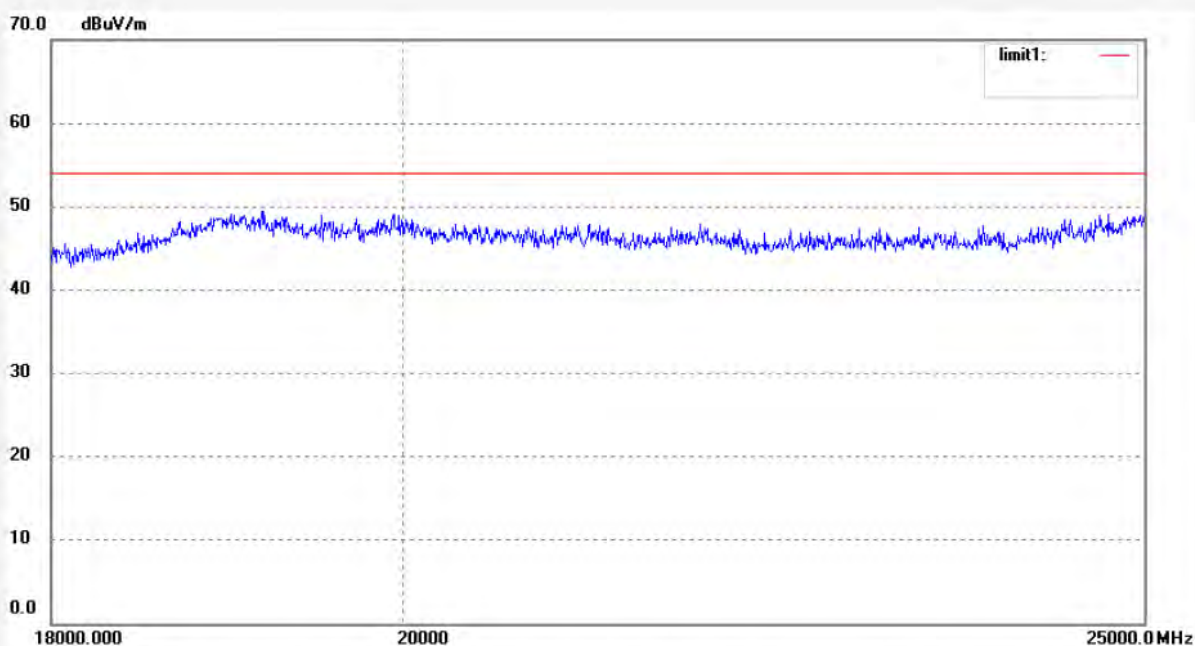

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Ricky #906

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Tablet PC

Mode: TX802.11N20(CH1)

Model: PC7009

Manufacturer: Kintech Co.,Ltd

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/10/13/

Time: 8/28/20

Engineer Signature: Ricky

Distance: 3m

Note:

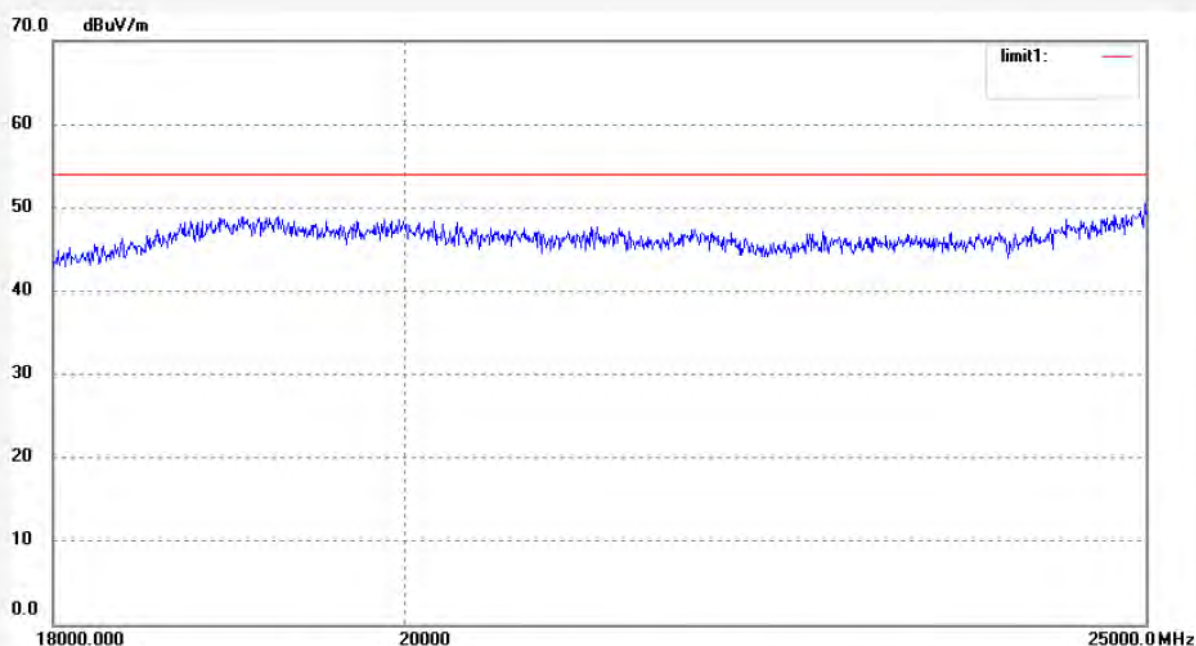

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ricky #907

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Tablet PC

Mode: TX802.11N20(CH1)

Model: PC7009

Manufacturer: Kintech Co.,Ltd

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/10/13/

Time: 8/32/22

Engineer Signature: Ricky

Distance: 3m

Note:

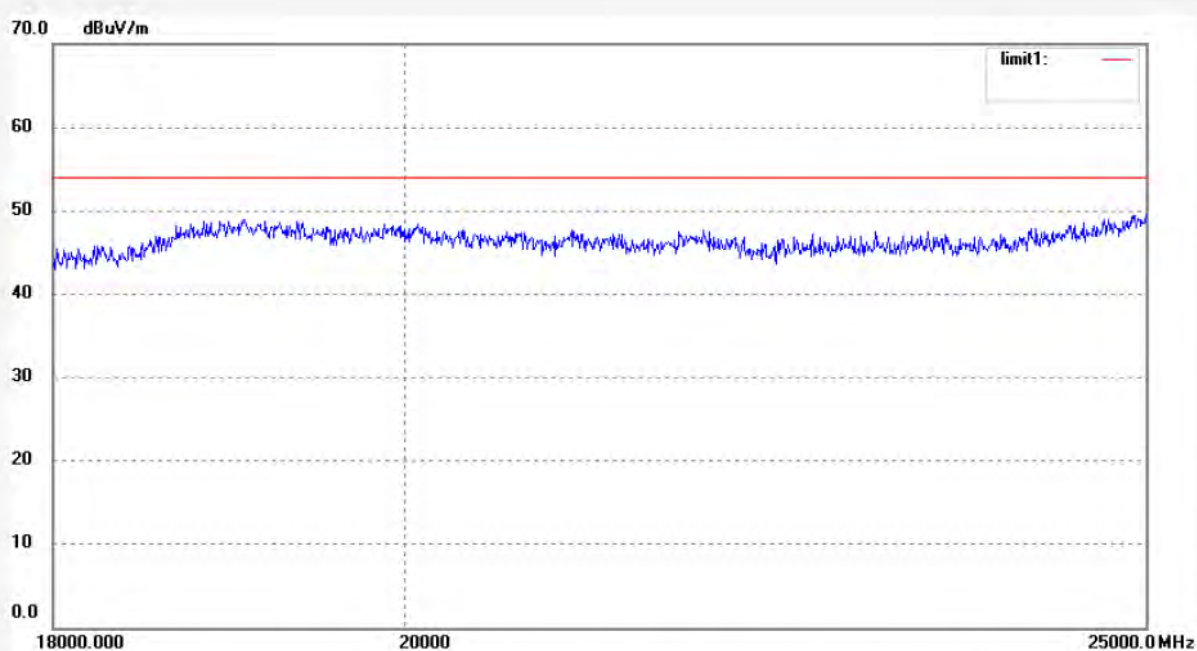

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ricky #908

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Tablet PC

Mode: TX802.11N20(CH6)

Model: PC7009

Manufacturer: Kintech Co.,Ltd

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/10/13/

Time: 8/35/13

Engineer Signature: Ricky

Distance: 3m

Note:

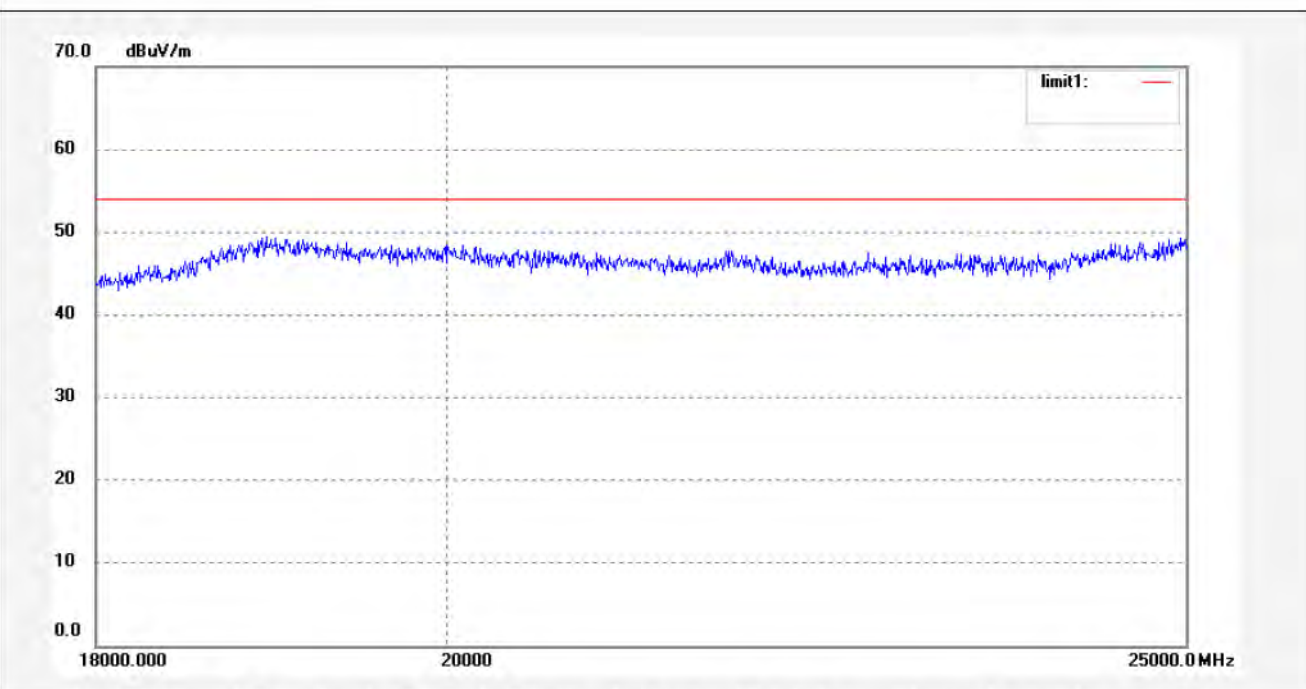

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ricky #909

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Tablet PC

Mode: TX802.11N20(CH6)

Model: PC7009

Manufacturer: Kintech Co.,Ltd

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/10/13/

Time: 8/40/40

Engineer Signature: Ricky

Distance: 3m

Note:

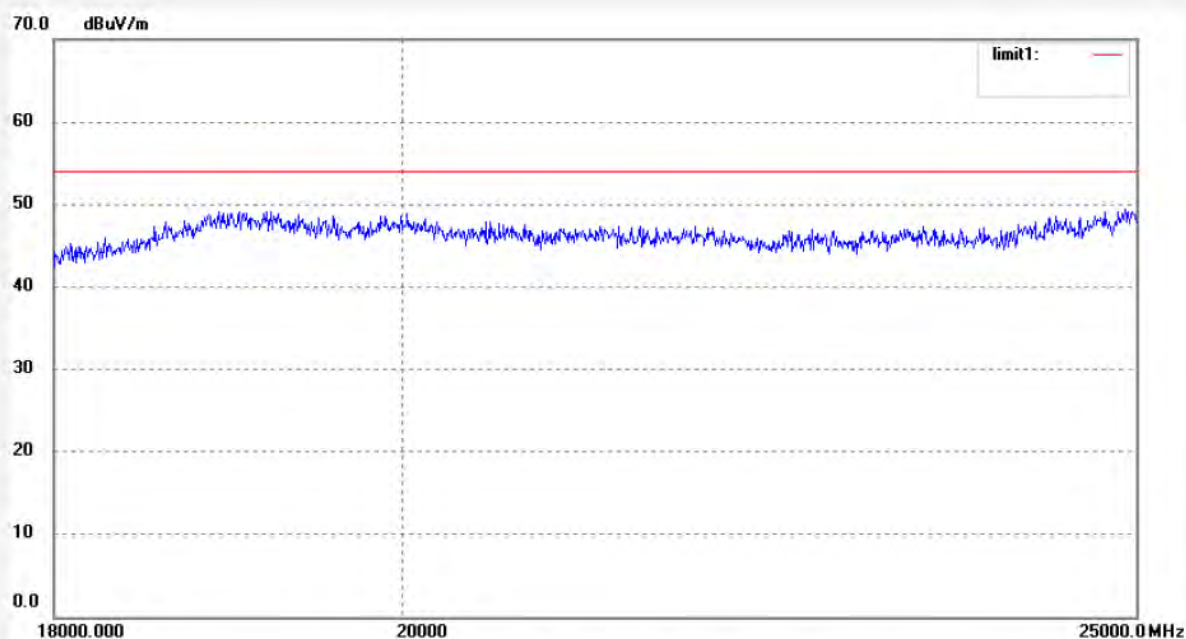

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Ricky #910	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/13/
Temp.(C)/Hum.(%) 25 C / 50 %	Time: 8/43/25
EUT: Tablet PC	Engineer Signature: Ricky
Mode: TX802.11N20(CH11)	Distance: 3m
Model: PC7009	
Manufacturer: Kintech Co.,Ltd	

Note:

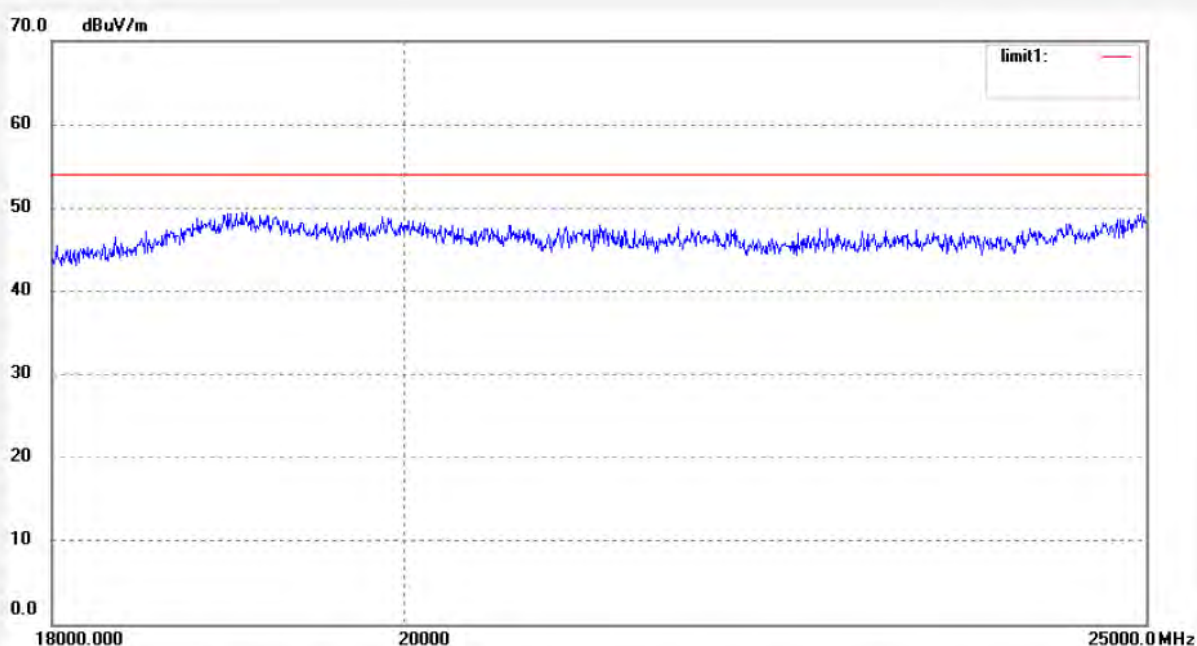

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ricky #911

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Tablet PC

Mode: TX802.11N20(CH11)

Model: PC7009

Manufacturer: Kintech Co.,Ltd

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/10/13/

Time: 8/46/52

Engineer Signature: Ricky

Distance: 3m

Note:

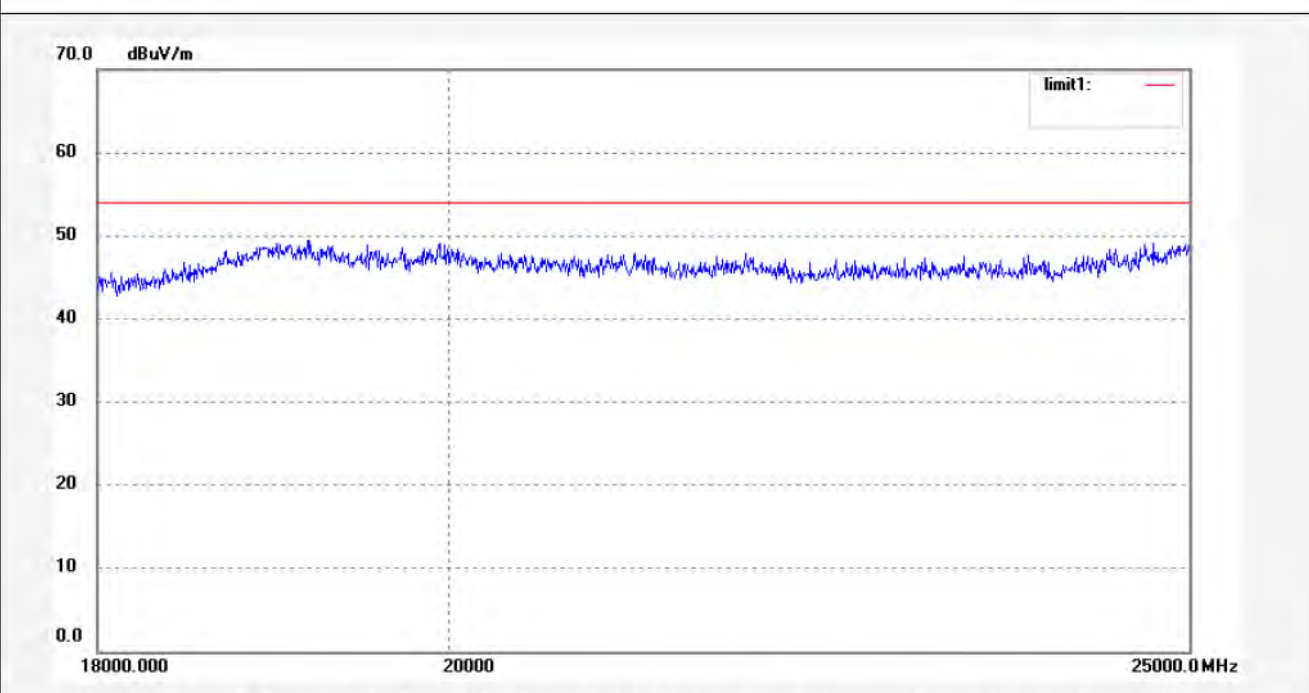

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Ricky #912	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/13/
Temp.(C)/Hum.(%) 25 C / 50 %	Time: 8/28/20
EUT: Tablet PC	Engineer Signature: Ricky
Mode: TX802.11N40(CH3)	Distance: 3m
Model: PC7009	
Manufacturer: Kintech Co.,Ltd	

Note:

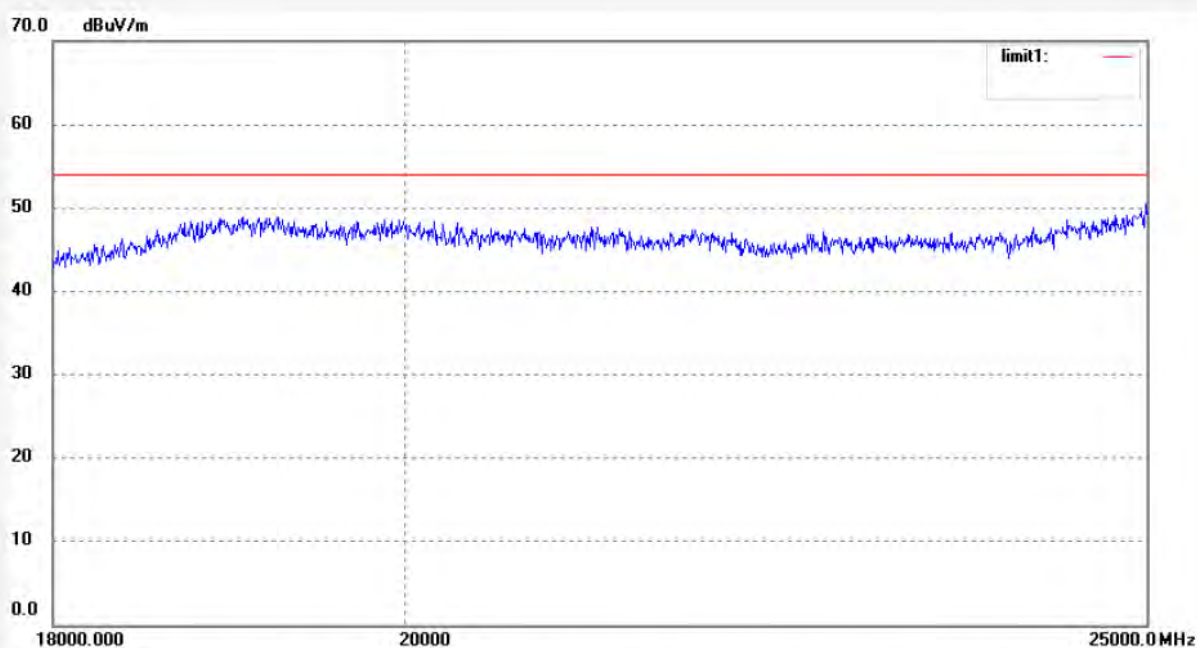

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Ricky #913

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Tablet PC

Mode: TX802.11N40(CH3)

Model: PC7009

Manufacturer: Kintech Co.,Ltd

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/10/13/

Time: 8/32/22

Engineer Signature: Ricky

Distance: 3m

Note:

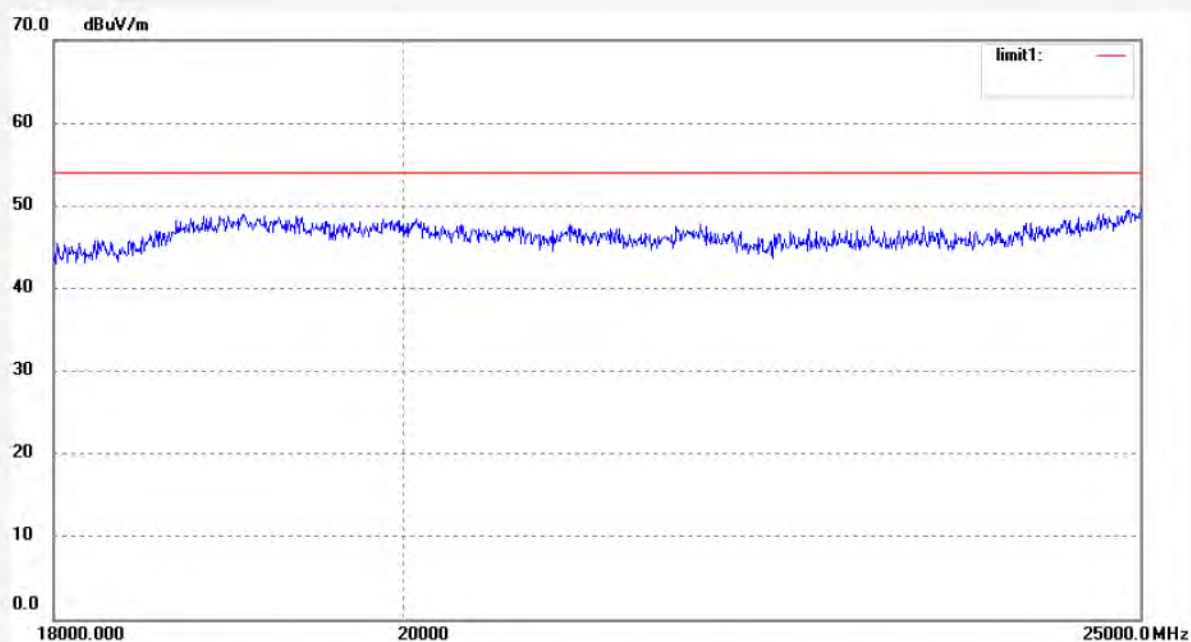

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Ricky #914

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Tablet PC

Mode: TX802.11N40(CH6)

Model: PC7009

Manufacturer: Kintech Co.,Ltd

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/10/13/

Time: 8/35/13

Engineer Signature: Ricky

Distance: 3m

Note:

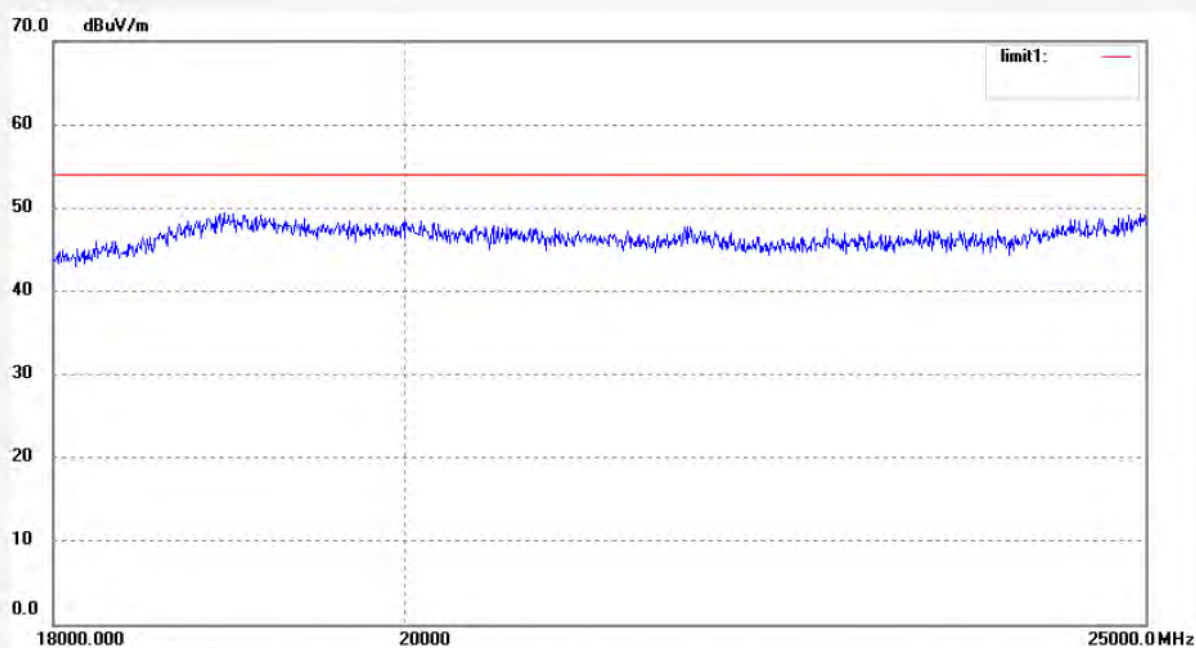

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Ricky #915

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Tablet PC

Mode: TX802.11N40(CH6)

Model: PC7009

Manufacturer: Kintech Co.,Ltd

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/10/13/

Time: 8/40/40

Engineer Signature: Ricky

Distance: 3m

Note:

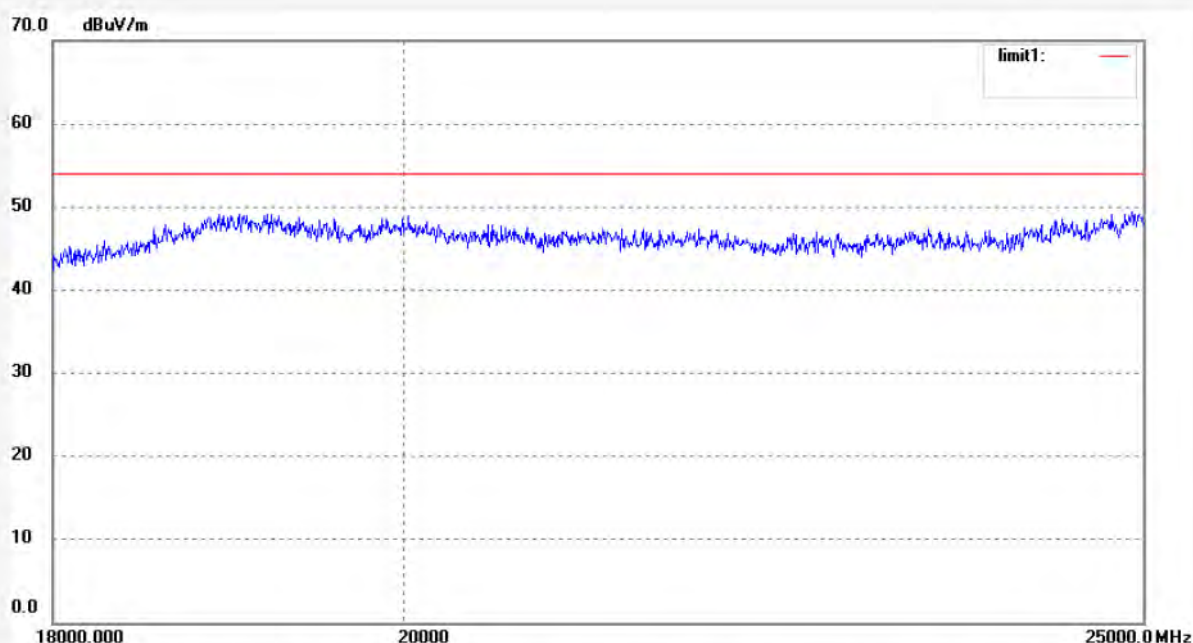

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ricky #916

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Tablet PC

Mode: TX802.11N40(CH9)

Model: PC7009

Manufacturer: Kintech Co.,Ltd

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/10/13/

Time: 8/43/25

Engineer Signature: Ricky

Distance: 3m

Note:

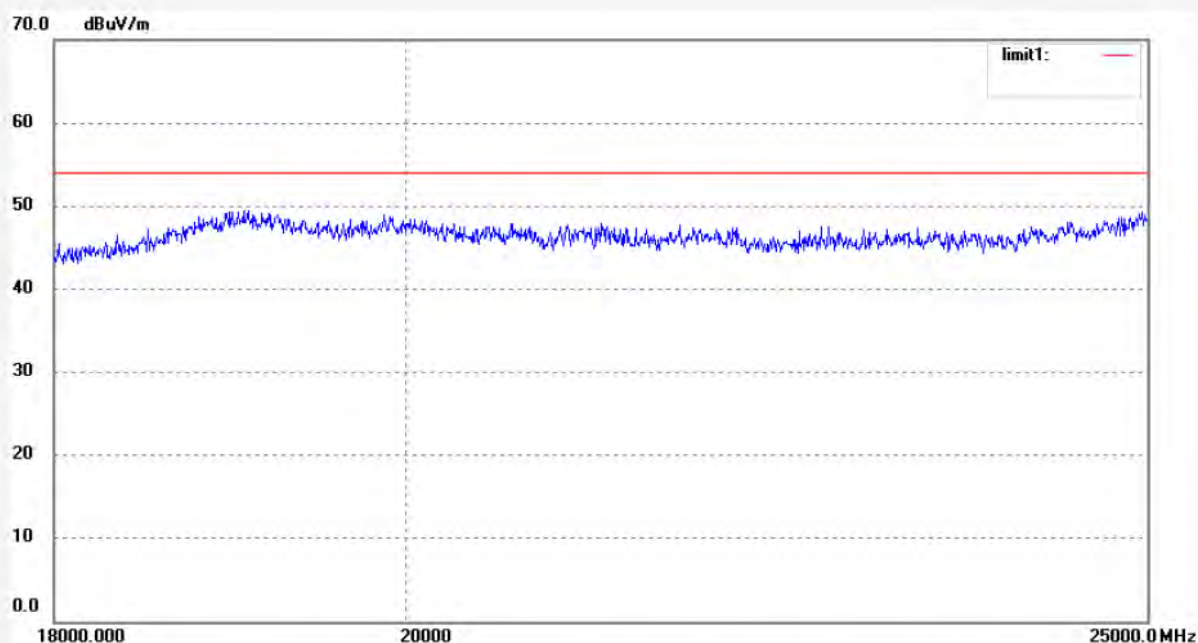

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Ricky #917

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Tablet PC

Mode: TX802.11N40(CH9)

Model: PC7009

Manufacturer: Kintech Co.,Ltd

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/10/13/

Time: 8/46/52

Engineer Signature: Ricky

Distance: 3m


Note:

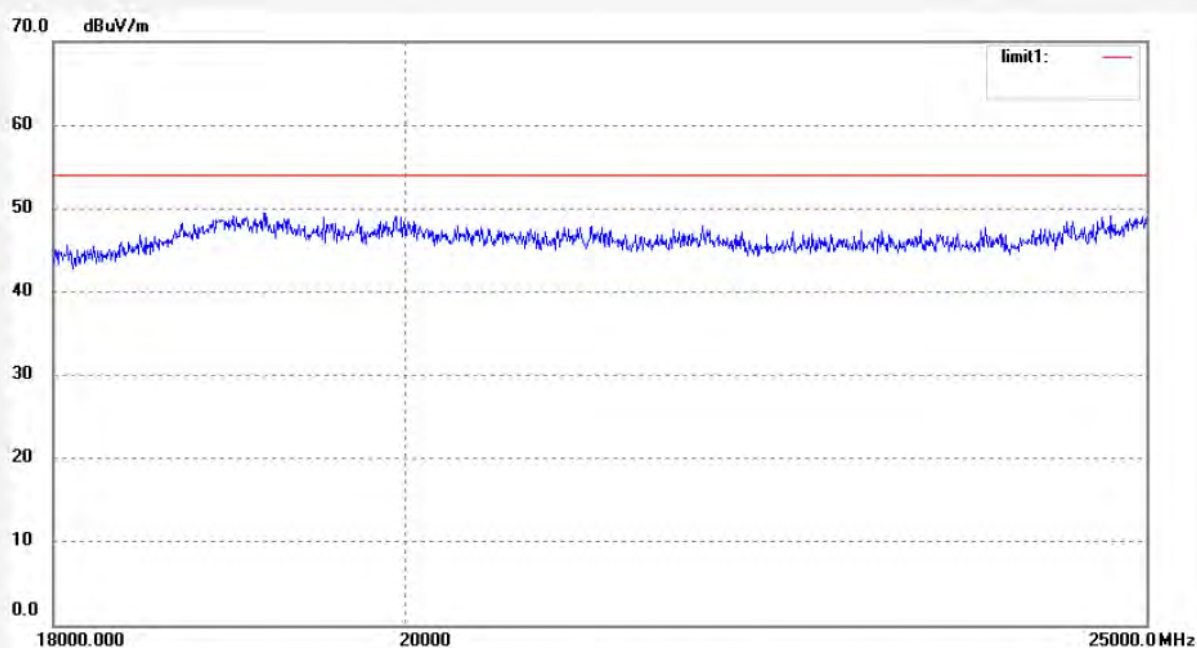

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------

10.CONDUCTED SPURIOUS EMISSION COMPLIANCE TEST

10.1.Block Diagram of Test Setup



(EUT: Tablet PC)

10.2.The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

10.3.EUT Configuration on Measurement

The following equipment is installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

10.3.1. Tablet PC (EUT)

Model Number	:	PC7009
Serial Number	:	N/A
Manufacturer	:	Kintech Co. Ltd

10.4.Operating Condition of EUT

10.4.1.Setup the EUT and simulator as shown as Section 10.1.

10.4.2.Turn on the power of all equipment.

10.4.3.Let the EUT work in TX modes measure it. The transmit frequency are 2412-2462 and 2422-2452MHz. We select 2412MHz, 2437MHz, 2462MHz and 2422MHz, 2437MHz, 2452MHz TX frequency to transmit.

10.5.Test Procedure

10.5.1.The transmitter output was connected to the spectrum analyzer via a low loss cable.

10.5.2.Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz.


10.5.3.The Conducted Spurious Emission was measured and recorded.

10.6.Test Result


Pass.

The spectrum analyzer plots are attached as below.


TX 802.11b Channel Low 2412MHz

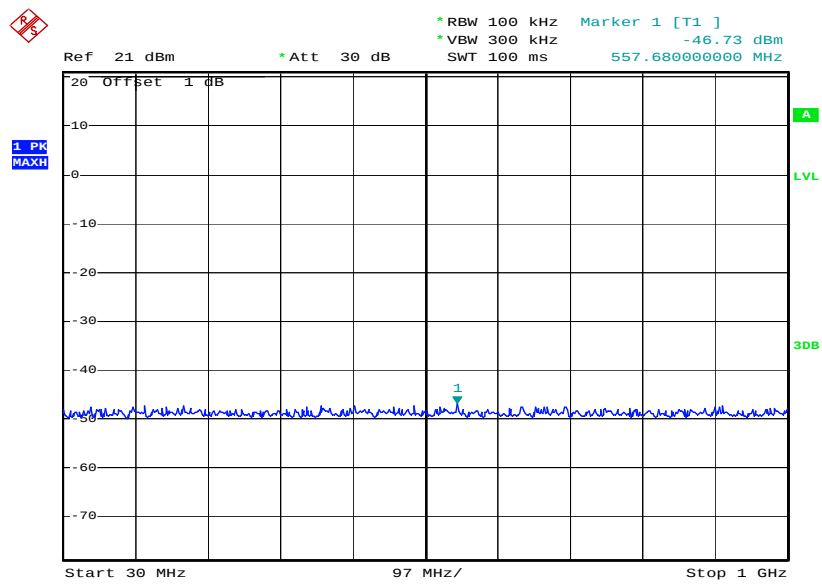


Date: 11.OCT.2012 15:22:38

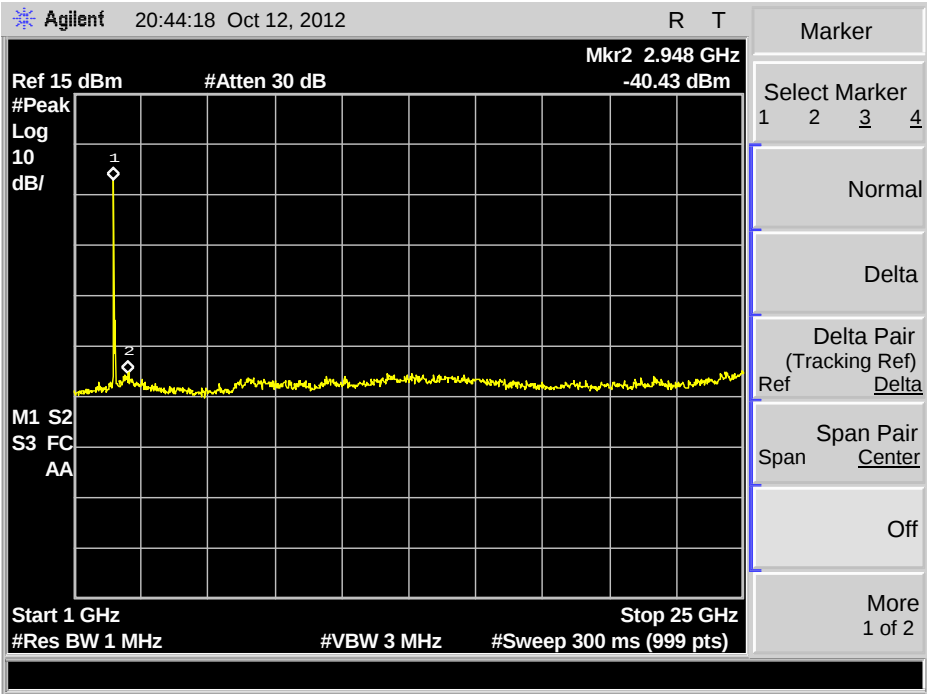


TX 802.11b Channel Middle 2437MHz

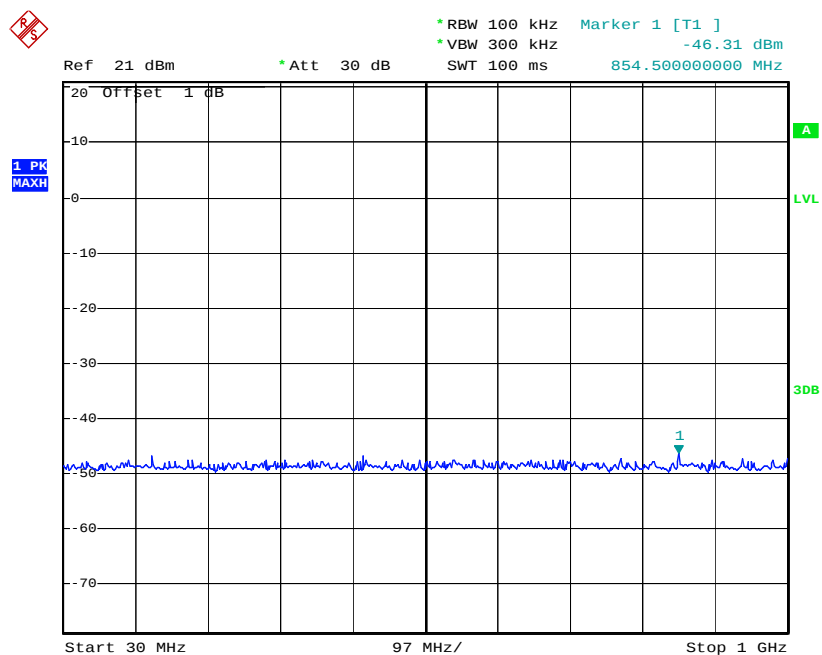


Date: 11.OCT.2012 15:37:42

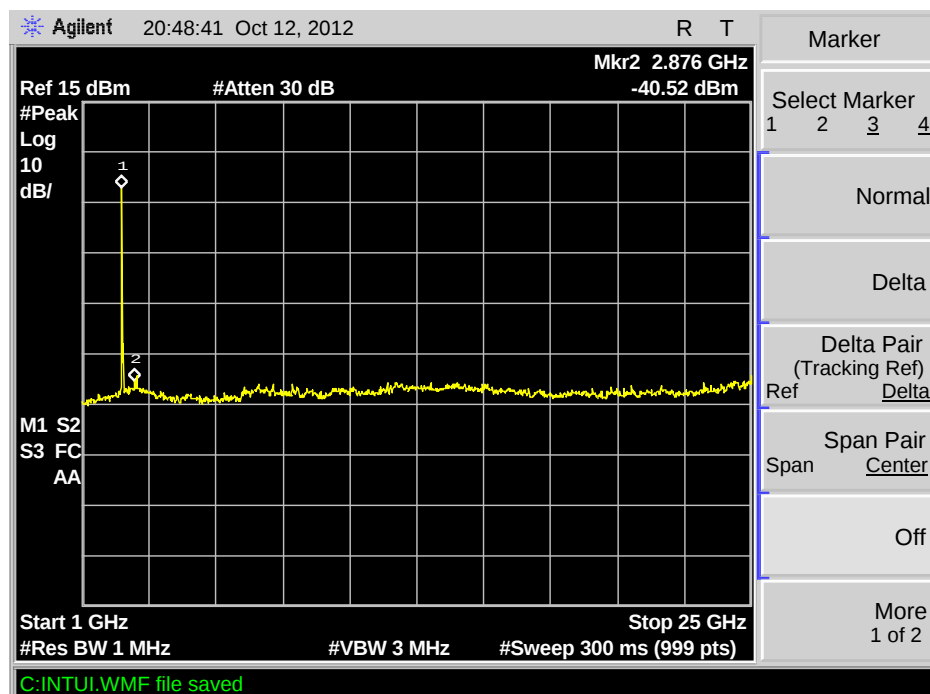


TX 802.11b Channel High 2462MHz

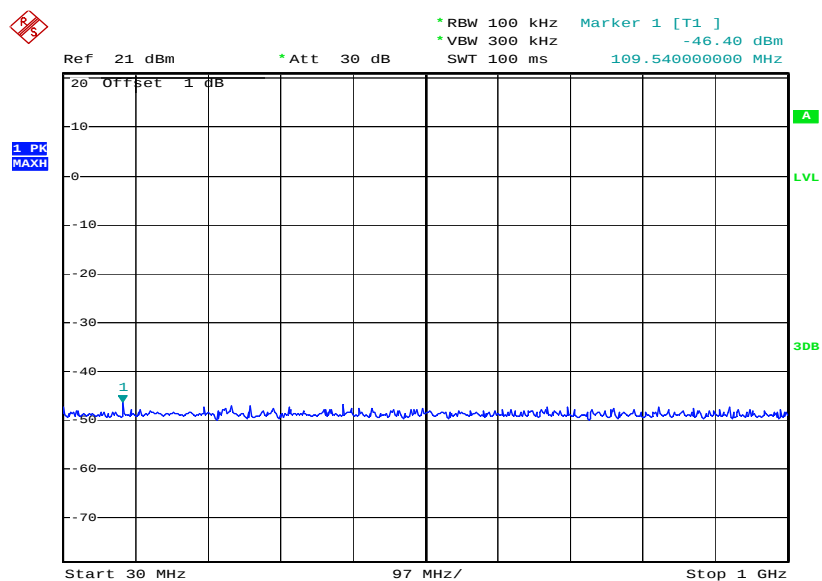


Date: 11.OCT.2012 15:53:44

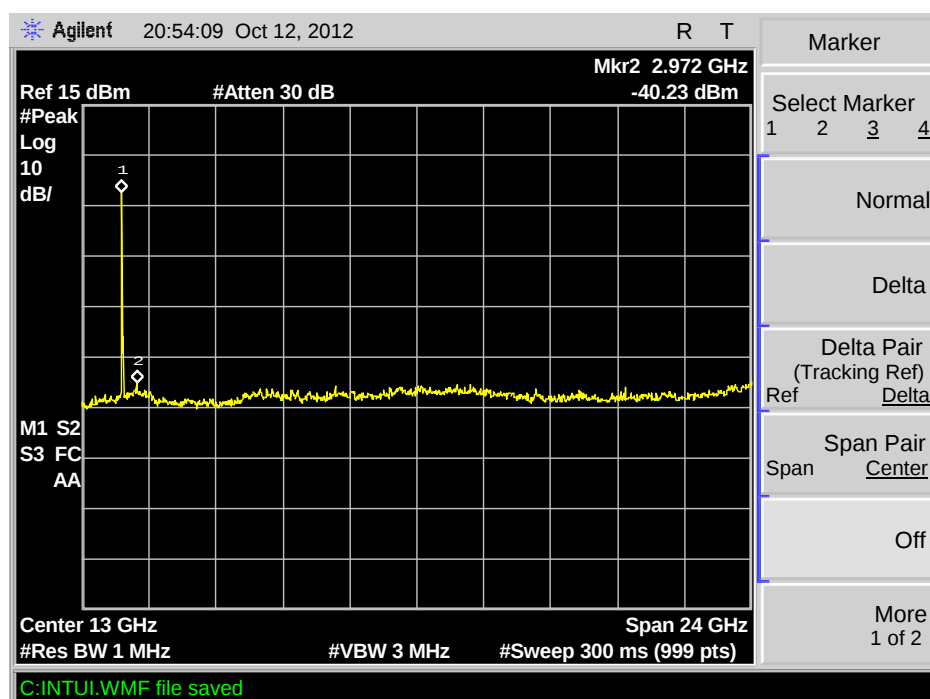


TX 802.11g Channel Low 2412MHz

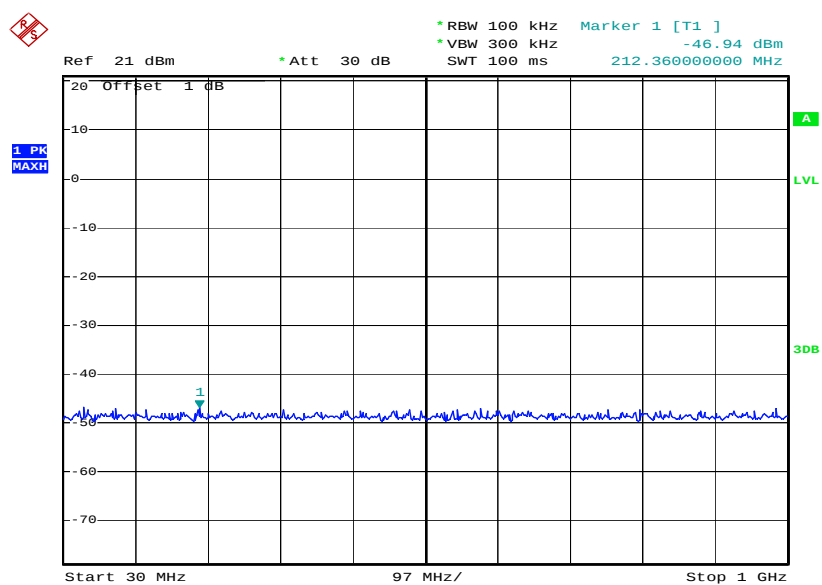


Date: 11.OCT.2012 16:06:42

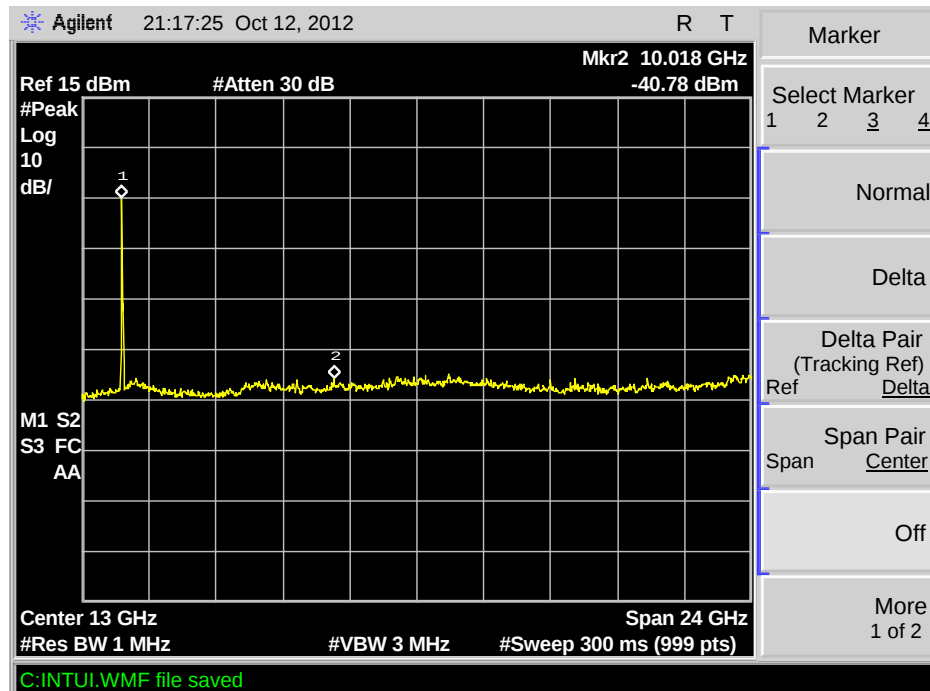


TX 802.11g Channel Middle 2437MHz

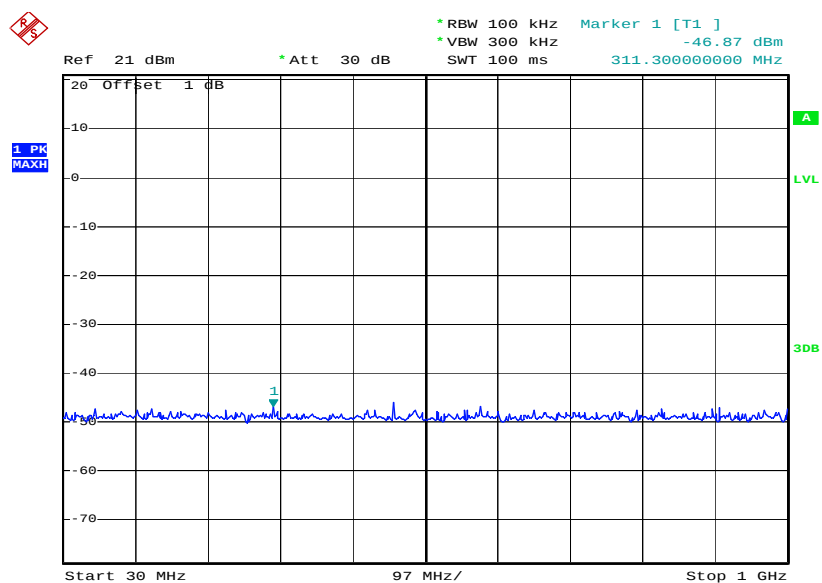


Date: 11.OCT.2012 16:15:28

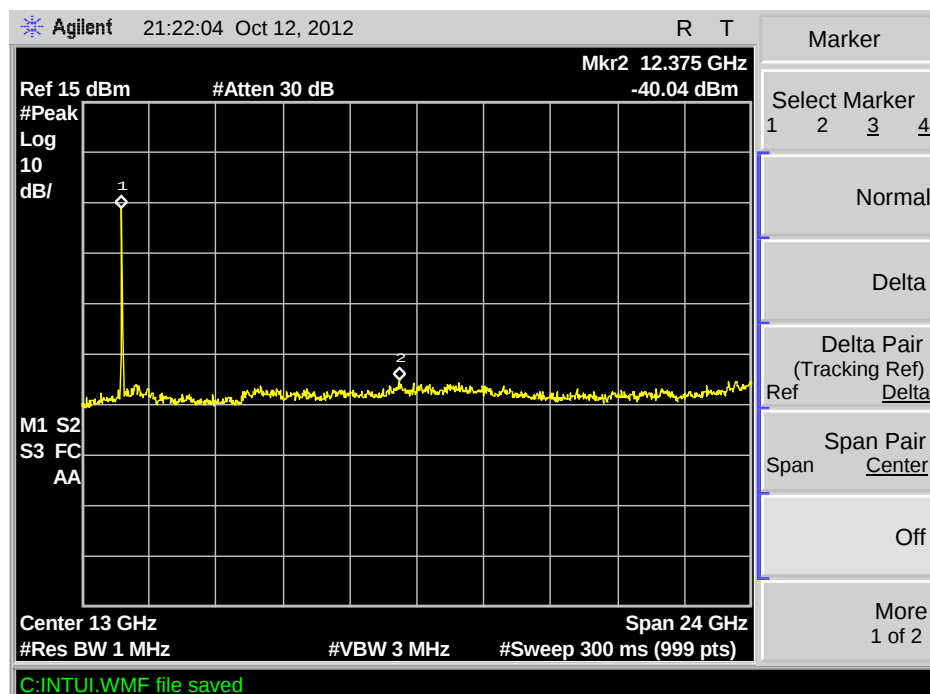


TX 802.11g Channel High 2462MHz

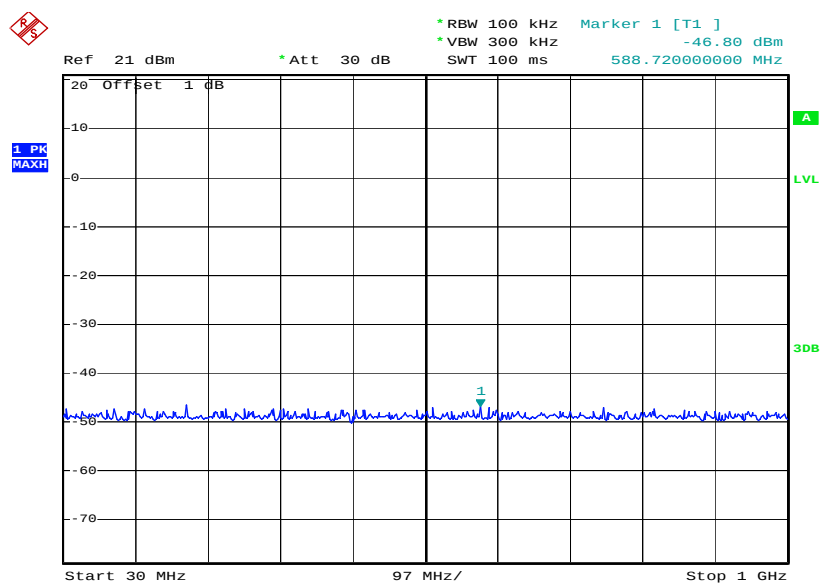


Date: 11.OCT.2012 16:29:52

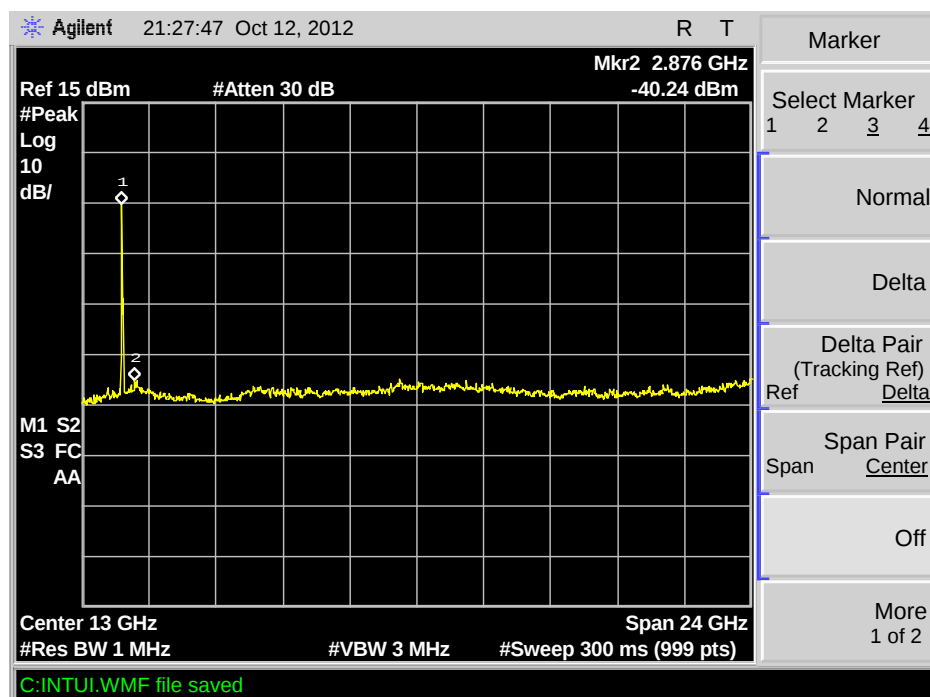


TX 802.11n Channel Low 2412MHz (20MHz)

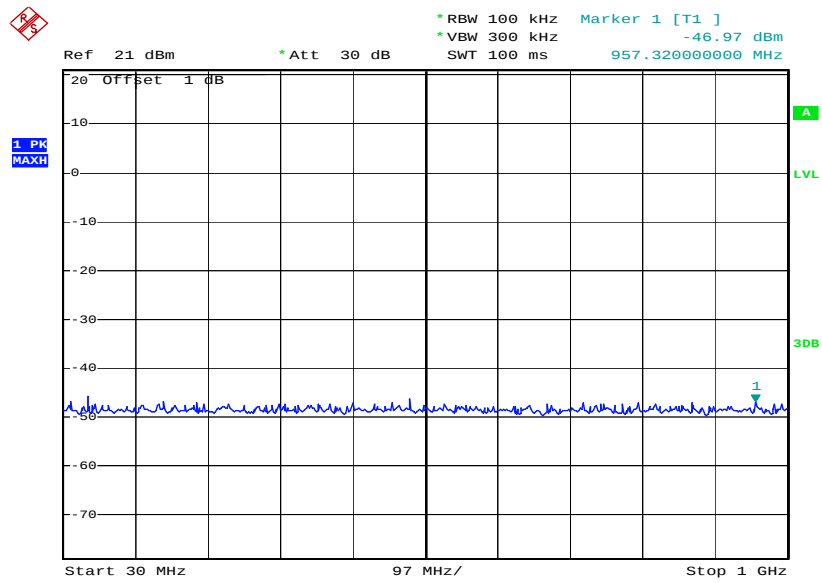


Date: 11.OCT.2012 16:42:43

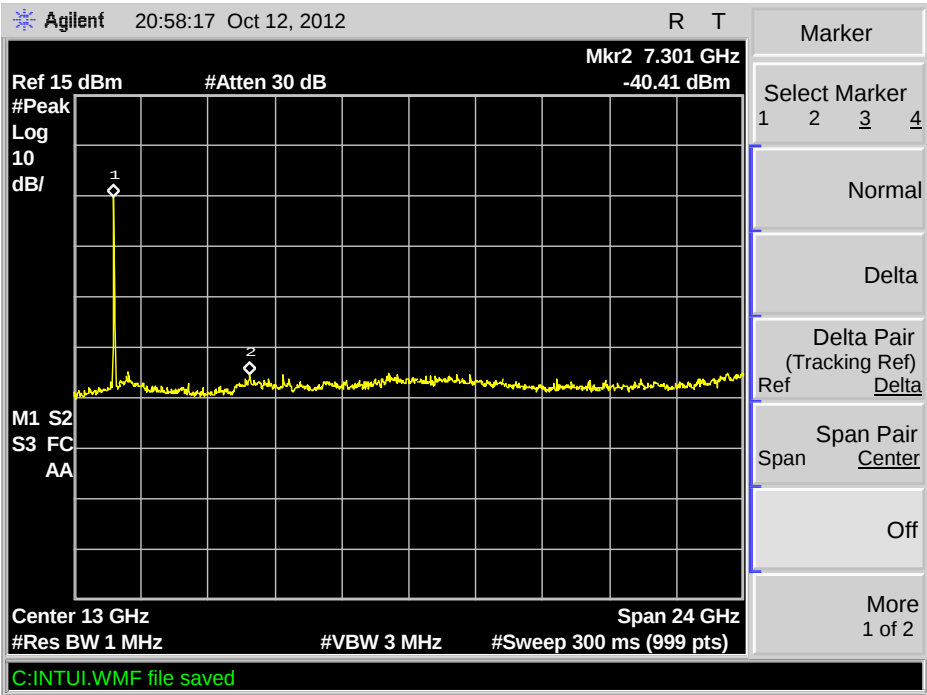


TX 802.11n Channel Middle 2437MHz (20MHz)

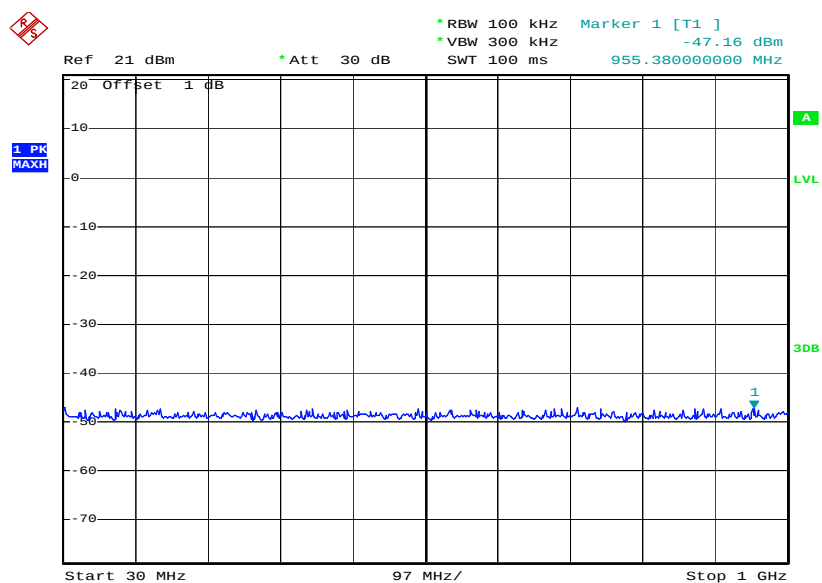


Date: 11.OCT.2012 16:53:00

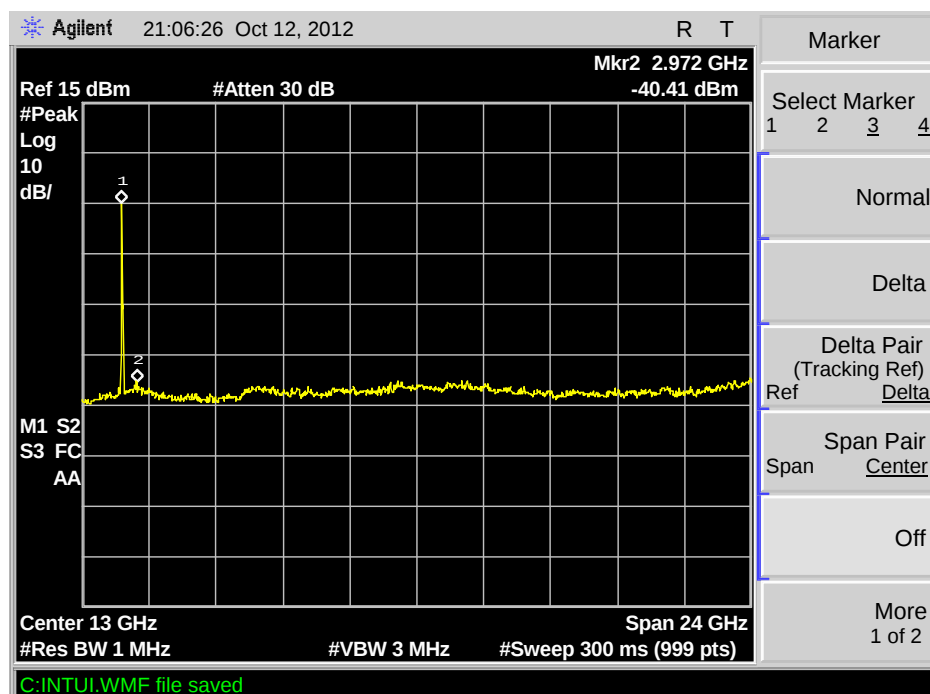


TX 802.11n Channel High 2462MHz (20MHz)

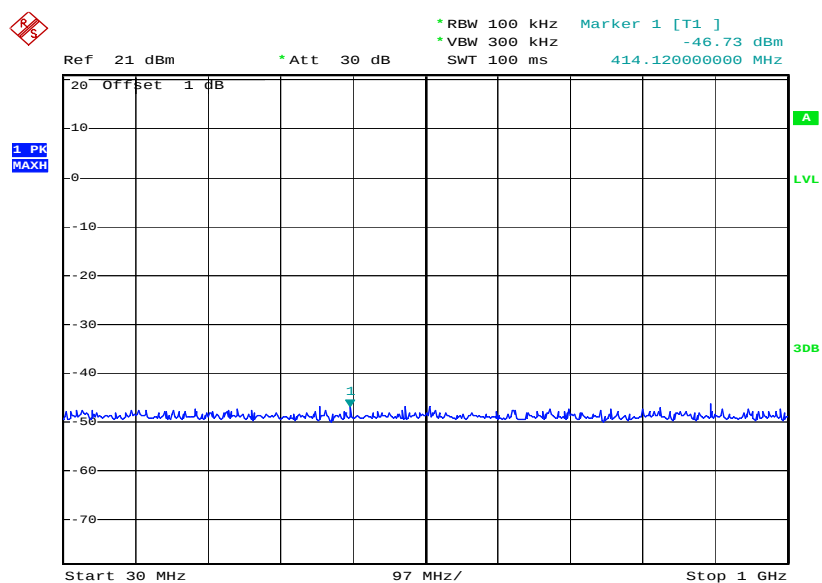


Date: 11.OCT.2012 17:12:31

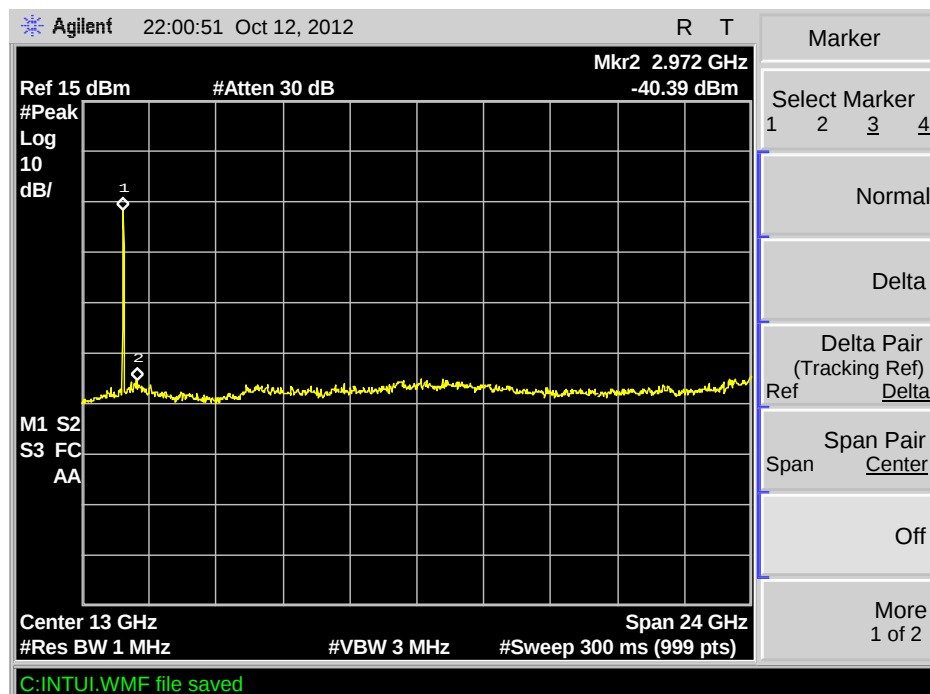


TX 802.11n Channel Low 2422MHz (40MHz)

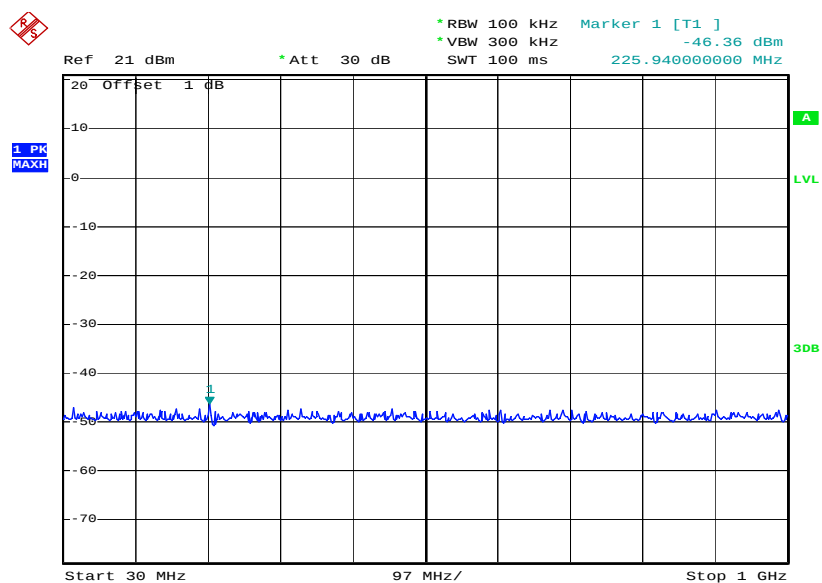


Date: 11.OCT.2012 17:24:41

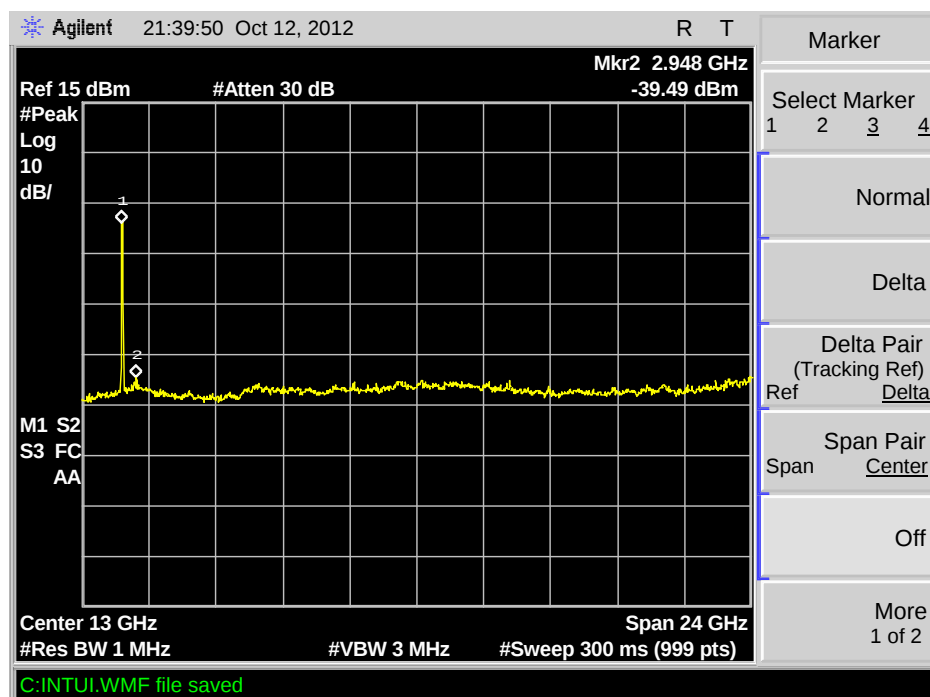


TX 802.11n Channel Middle 2437MHz (40MHz)

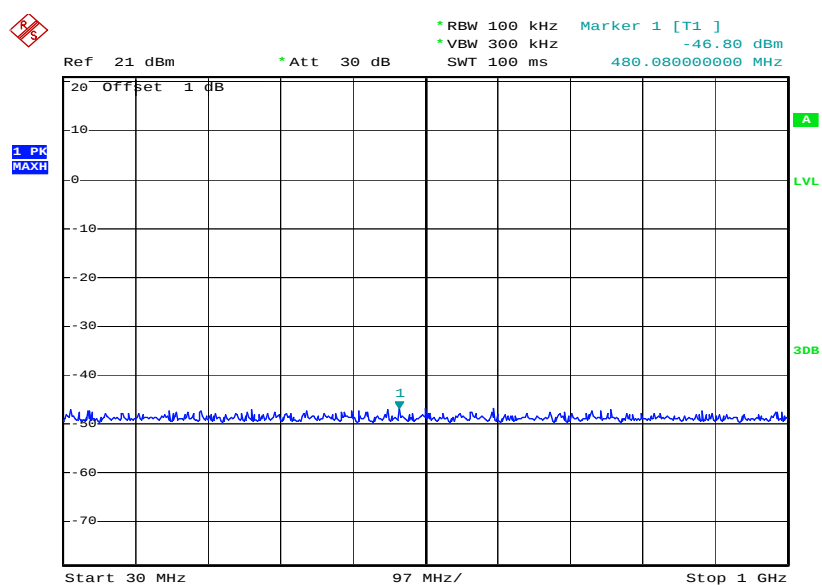


Date: 11.OCT.2012 17:36:41

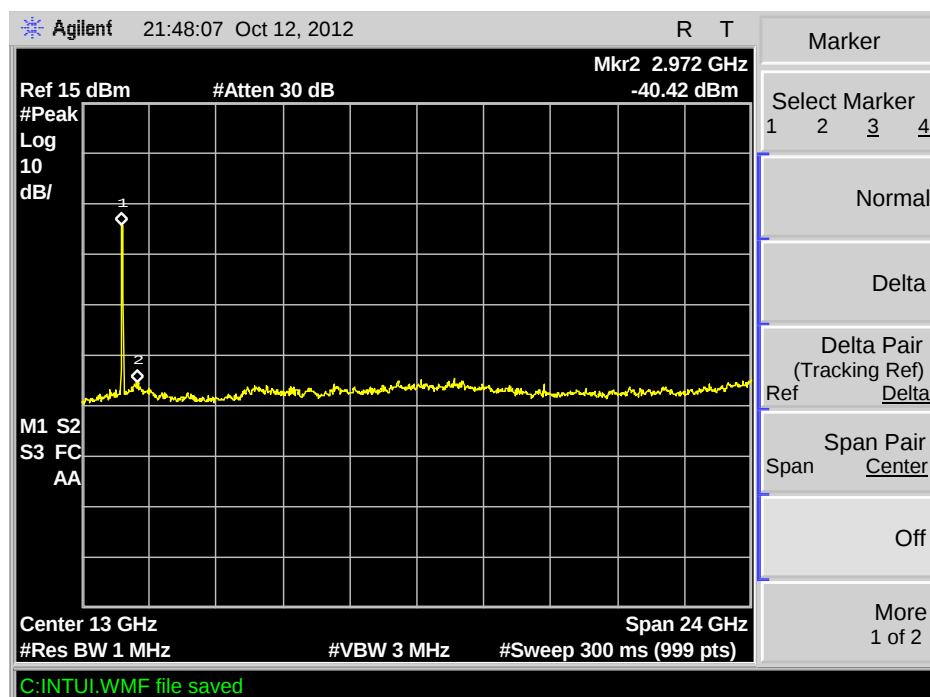

TX 802.11n Channel High 2452MHz (40MHz)

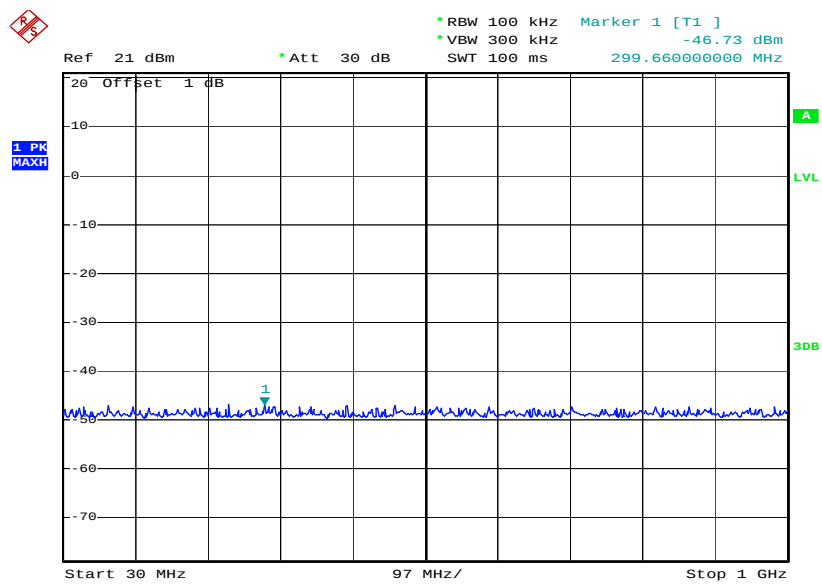


Date: 11.OCT.2012 17:49:37

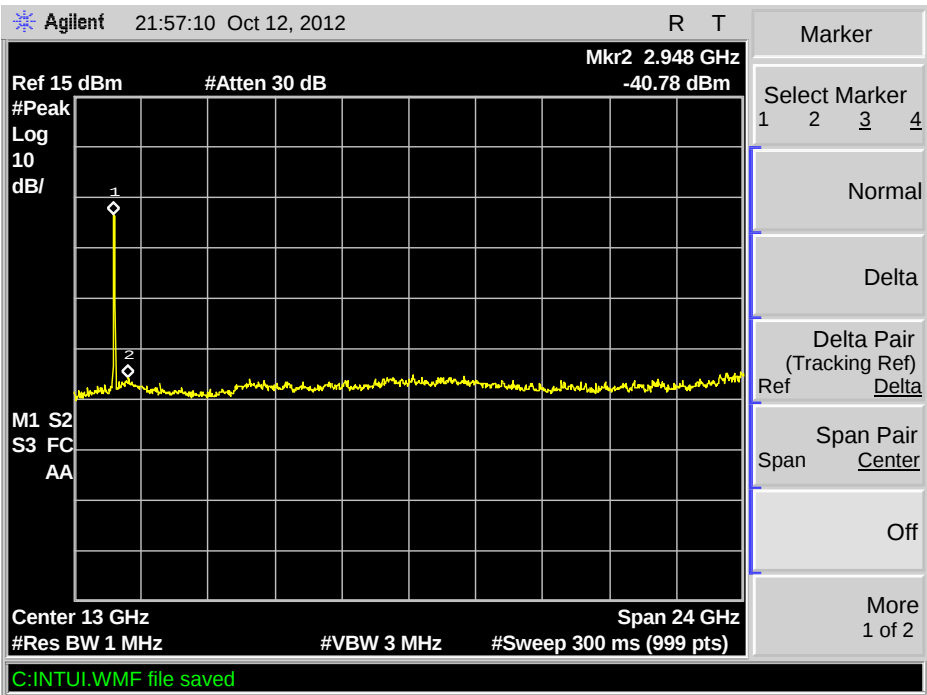


11.AC POWER LINE CONDUCTED EMISSION FOR FCC PART 15 SECTION 15.207(A)

11.1.Block Diagram of Test Setup

11.1.1.Block diagram of connection between the EUT and simulators

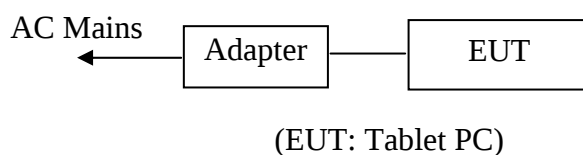

11.1.2.Shielding Room Test Setup Diagram

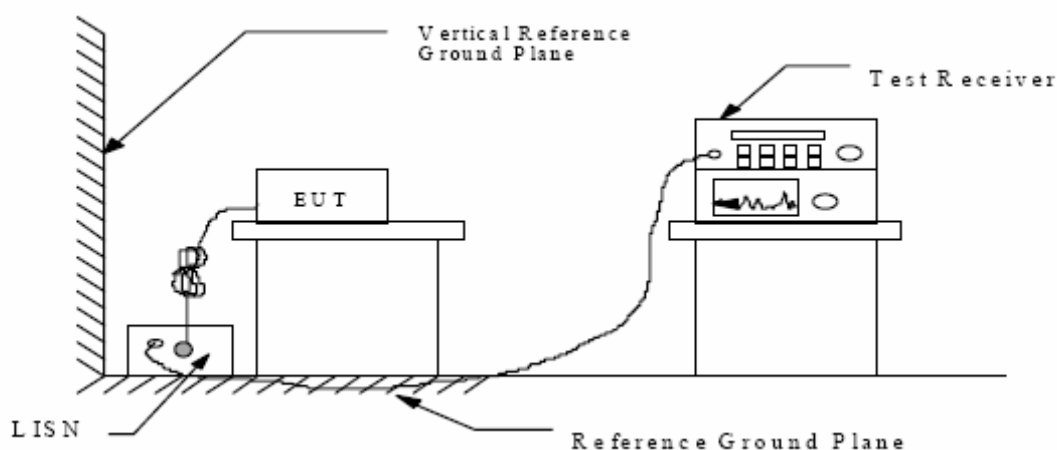

(EUT: Tablet PC)

11.2.The Emission Limit

11.2.1.Conducted Emission Measurement Limits According to Section 15.207(a)

Frequency (MHz)	Limit dB(μ V)	
	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 – 56.0 *	56.0 – 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0

* Decreases with the logarithm of the frequency.

11.3.Configuration of EUT on Measurement

The following equipment are installed on the Conducted Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

11.3.1. Tablet PC (EUT)

Model Number	:	PC7009
Serial Number	:	N/A
Manufacturer	:	Kintech Co. Ltd

11.4.Operating Condition of EUT

11.4.1.Setup the EUT and simulator as shown as Section 11.1.

11.4.2.Turn on the power of all equipment.

11.4.3.Let the EUT work in TX (Charging) mode measure it.

11.5.Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4: 2003 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9 kHz.

The frequency range from 150 kHz to 30MHz is checked.

11.6.Power Line Conducted Emission Measurement Results

PASS.

The frequency range from 150 kHz to 30MHz is checked.

Date of Test:	Sep 25, 2012	Temperature:	25°C
EUT:	Tablet PC	Humidity:	50%
Model No.:	PC7009	Power Supply:	AC 120V/60Hz
Test Mode:	operation	Test Engineer:	Ricky

Frequency (MHz)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector	Line
0.185344	61.00	64	3.2	QP	Neutral
0.301641	50.60	60	9.6	QP	
0.363895	48.40	59	10.2	QP	
0.183137	47.90	54	6.4	AV	
0.245097	46.90	52	5.0	AV	
0.795762	38.70	46	7.3	AV	
0.186085	60.20	64	4.0	QP	Live
0.242197	55.40	62	6.6	QP	
0.305276	50.60	60	9.5	QP	
0.184605	47.90	54	6.4	AV	
0.245097	45.10	52	6.8	AV	
0.307723	40.30	50	9.7	AV	


Emissions attenuated more than 20 dB below the permissible value are not reported.
The spectral diagrams are attached as below.

ACCURATE TECHNOLOGY CO.,LTD**CONDUCTED EMISSION STANDARD FCC PART 15B**

EUT: Tablet PC M/N:PC7009
 Manufacturer: Kintech Co.,Ltd
 Operating Condition: Operation
 Test Site: 1#Shielding Room
 Operator: Ricky
 Test Specification: L 120V/60Hz
 Comment:
 Report No.:ATE20122083

SCAN TABLE: "V 150K-30MHz fin"

Short Description: SUB STD VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 0.8 % QuasiPeak 1.0 s 9 kHz NSLK8126 2008
 Average

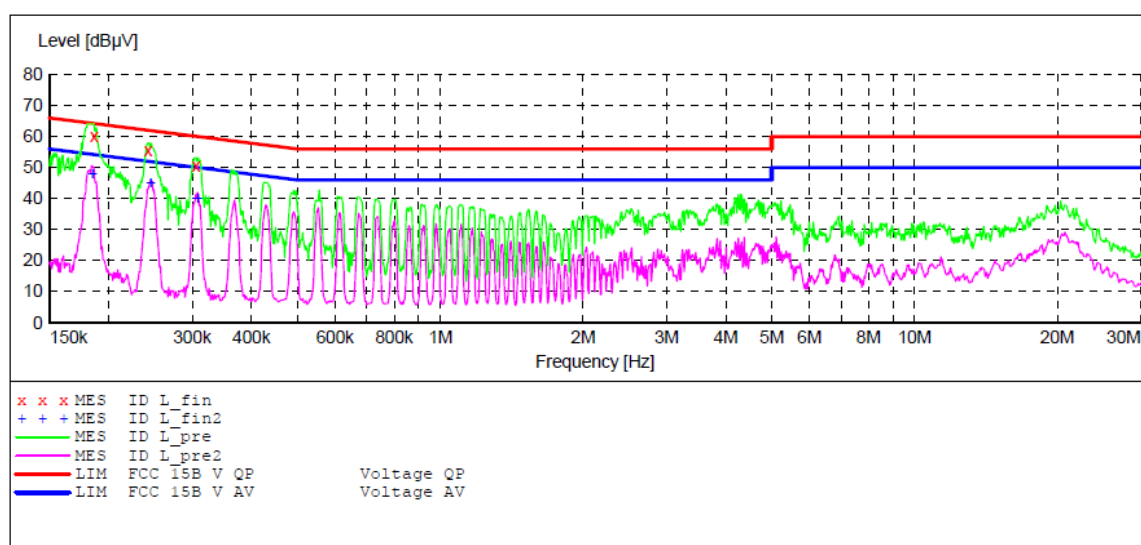**MEASUREMENT RESULT: "ID L_fin"**

9/25/2012 4:30PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.186085	60.20	11.2	64	4.0	QP	L1	GND
0.242179	55.40	11.4	62	6.6	QP	L1	GND
0.305276	50.60	11.6	60	9.5	QP	L1	GND

MEASUREMENT RESULT: "ID L_fin2"

9/25/2012 4:30PM


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.184605	47.90	11.2	54	6.4	AV	L1	GND
0.245097	45.10	11.4	52	6.8	AV	L1	GND
0.307723	40.30	11.6	50	9.7	AV	L1	GND

ACCURATE TECHNOLOGY CO.,LTD**CONDUCTED EMISSION STANDARD FCC PART 15B**

EUT: Tablet PC M/N:PC7009
 Manufacturer: Kintech Co.,Ltd
 Operating Condition: Operation
 Test Site: 1#Shielding Room
 Operator: Ricky
 Test Specification: N 120V/60Hz
 Comment:
 Report No.:ATE20122083

SCAN TABLE: "V 150K-30MHz fin"

Short Description: SUB STD VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 0.8 % QuasiPeak 1.0 s 9 kHz NSLK8126 2008
 Average

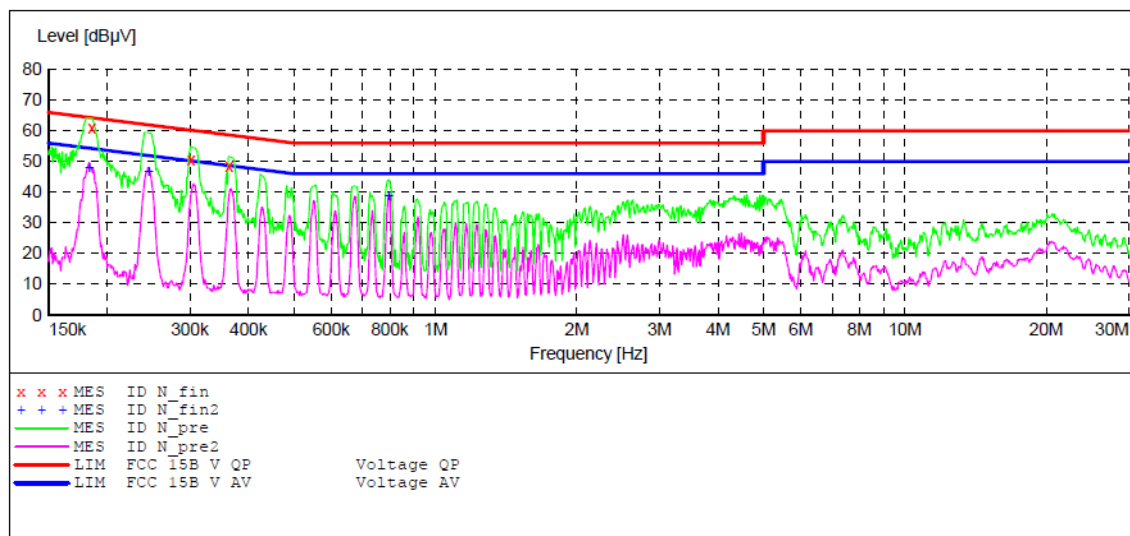**MEASUREMENT RESULT: "ID N_fin"**

9/25/2012 4:26PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.185344	61.00	11.2	64	3.2	QP	N	GND
0.301641	50.60	11.6	60	9.6	QP	N	GND
0.363895	48.40	11.7	59	10.2	QP	N	GND

MEASUREMENT RESULT: "ID N_fin2"

9/25/2012 4:26PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.183137	47.90	11.2	54	6.4	AV	N	GND
0.245097	46.90	11.4	52	5.0	AV	N	GND
0.795762	38.70	11.9	46	7.3	AV	N	GND

12.ANTENNA REQUIREMENT

12.1.The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

12.2.Antenna Construction

Device is equipped with unique antenna, which isn't displaced by other antenna. Therefore, the equipment complies with the antenna requirement of Section 15.203.



Antenna