




Test report No:
2050503R-RF-US-P06V02

FCC TEST REPORT

Product Name	GPS Tracker
Trademark	KAGA
Model and /or type reference	HKL-1MU,HKS-1MU,HKO-1MU
FCC ID	BXTHKS1MU
Applicant's name / address	KAGA Electronics Co. ,Ltd. 20 Kandamatsunagacho,Chiyoda-ku, Tokyo
Test method requested, standard	FCC CFR Title 47 Part 15 Subpart C Section 15.247 ANSI C63.10: 2013 KD558074 D01 15.247 Meas Guidance v05r02
Verdict Summary	IN COMPLIANCE
Documented By	Kitty Li/Project Assistant 
Reviewed by (name / position & signature)	Frank He/ Technical Supervisor 
Approved by (name / position & signature)	Jack Zhang/ Supervisor 
Date of issue	2020-07-31
Report template No	Template_FCC 15.247-RF-V1.0

INDEX

	page
General conditions	4
Environmental conditions	4
Possible test case verdicts	5
Abbreviations	5
Document History	6
Remarks and Comments.....	6
Used Equipment	7
Uncertainty	9
1 General Information.....	10
1.1 General Description of the Item(s)	10
1.2 Antenna Information	11
1.3 Model difference description	12
1.4 Channel List.....	13
2 Description of Test Setup	14
2.1 Operating mode(s) used for tests.....	14
2.2 Auxiliary equipment / Test software for the EUT.....	14
2.3 Test Configuration / Block diagram used for tests	15
2.4 Testing process	16
3 Verdict summary section	17
3.1 Standards.....	17
3.2 Deviation(s) from the Standard(s) / Test Specification(s).....	17
3.3 Overview of results.....	17
3.4 Test Facility.....	18
4 Test Results	19
4.1 AC Power Line Conducted Emission	19
4.1.1 Limit	19
4.1.2 Test Setup.....	19
4.1.3 Test Procedure.....	19
4.1.4 Test Data	20
4.2 Emissions in restricted frequency bands	21
4.2.1 Limit	21
4.2.2 Test Setup.....	23
4.2.3 Test Procedure.....	24
4.2.4 Test Data	25

4.3	Emissions in non-restricted frequency band.....	33
4.3.1	Limit	33
4.3.2	Test Setup.....	33
4.3.3	Test Procedure.....	33
4.3.4	Test Data	34
4.4	Duty cycle	35
4.4.1	Limit	35
4.4.2	Test Setup.....	35
4.4.3	Test Procedure.....	35
4.4.4	Test Data	36
4.5	Radiated Emission Band Edge	37
4.5.1	Limit	37
4.5.2	Test Setup.....	37
4.5.3	Test Procedure.....	37
4.5.4	Test Data	38
4.6	DTS Bandwidth	46
4.6.1	Limit	46
4.6.2	Test Setup.....	46
4.6.3	Test Procedure.....	46
4.6.4	Test Data	47
4.7	Fundamental emission output power	48
4.7.1	Limit	48
4.7.2	Test Setup.....	48
4.7.3	Test Procedure.....	49
4.7.4	Test Data	50
4.8	Power Density	51
4.8.1	Limit:	51
4.8.2	Test Setup.....	51
4.8.3	Test Procedure.....	51
4.8.4	Test Data	52
4.9	Antenna Requirement.....	53
4.9.1	Limit:	53
4.9.2	Antenna Connector Construction:	53
4.10	Test setup photo and EUT Photo.....	54

COMPETENCES AND GUARANTEES

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

GENERAL CONDITIONS

Test Location	No. 99, Hongye Road, Suzhou Industrial Park Suzhou, 215006, P.R. China
Date(receive sample)	May. 21, 2020
Date (start test)	May. 23, 2020
Date (finish test)	Jul. 11, 2020

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or Competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA.

ENVIRONMENTAL CONDITIONS

The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. The climatic conditions during the tests were within the following limits:

Ambient temperature	15 °C – 35 °C
Relative Humidity air	30% - 60%

If explicitly required in the basic standard or applied product / product family standard the climatic values are recorded and documented separately in this test report.

POSSIBLE TEST CASE VERDICTS

Test case does not apply to test object	N/A
Test object does meet requirement	P (Pass) / PASS
Test object does not meet requirement	F (Fail) / FAIL
Not measured	N/M

ABBREVIATIONS

For the purposes of the present document, the following abbreviations apply:

EUT	: Equipment Under Test
QP	: Quasi-Peak
CAV	: CISPR Average
AV	: Average
CDN	: Coupling Decoupling Network
SAC	: Semi-Anechoic Chamber
OATS	: Open Area Test Site
BW	: Bandwidth
AM	: Amplitude Modulation
PM	: Pulse Modulation
HCP	: Horizontal Coupling Plane
VCP	: Vertical Coupling Plane
U_N	: Nominal voltage
T_x	: Transmitter
R_x	: Receiver
N/A	: Not Applicable
N/M	: Not Measured

DOCUMENT HISTORY

Report No.	Version	Description	Issued Date
2050503R-RF-US-P06V02	V1.0	Initial issue of report.	2020-07-15
2050503R-RF-US-P06V02	V1.1	1) Remove the model of HKM-1MU 2) Update the models differences	2020-07-31

REMARKS AND COMMENTS

1. The equipment under test (EUT) does meet the essential requirements of the stated standard(s)/test(s).
2. These test results on a sample of the device are for the purpose of demonstrating Compliance with Part 15 Subpart C Paragraph 15.247.
3. The measurement result is considered in conformance with the requirement if it is within the prescribed limit, It is not necessary to account the uncertainty associated with the measurement result, unless the specification, standard or customer have special requirements.
4. The test results presented in this report relate only to the object tested.
5. The test results relate only to the samples tested.
6. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification (Suzhou) Co., Ltd.
7. This report will not be used for social proof function in China market.

USED EQUIPMENT

AC Power Line Conducted Emission / TR1

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
EMI Test Receiver	R&S	ESCI	100906	2020.04.20	2021.04.19
Two-Line V-Network	R&S	ENV216	101190	2019.12.28	2020.12.27
Two-Line V-Network	R&S	ENV216	101044	2019.12.28	2020.12.27
Current Probe	R&S	EZ-17	100678	2020.03.12	2021.04.11
50ohm Termination	SHX	TF2	07081402	2019.09.02	2020.09.01
50ohm Termination	SHX	TF2	07081403	2019.09.02	2020.09.01
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	N/A	N/A
Temperature/Humidity Meter	RTS	RTS-8S	TR1-TH	2019.08.21	2020.08.20
Coaxial Cable	Suhner	RG 223	TR1-C1	2019.08.25	2020.08.24
Coaxial Cable	Suhner	RG 223	TR1-C2	2019.08.25	2020.08.24
Dekra test software	Dekra	-	-	-	-

Emissions in non-restricted frequency bands/ Occupied Bandwidth/ Fundamental emission output power Power Spectral Density / TR8

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2019.09.28	2020.09.27
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2020.04.17	2021.04.16
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2019.08.30	2020.08.29
Wideband Peak Power Meter	Anritsu	ML2495A	0905006	2019.08.12	2020.08.11
Power Sensor	Anritsu	MA2411B	0846014	2019.08.12	2020.08.11
Coaxial Cable	Woken	SFL402	F02-150410-044	2020.01.01	2020.12.31
Dekra test software	Dekra	-	-	-	-

Radiated Emission(30MHz-1GHz) / AC3

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
EMI Test Receiver	R&S	ESCI	100573	2020.03.03	2021.03.02
Bilog Antenna	Teseq GmbH	CBL6112D	27611	2019.09.23	2020.09.22
Temperature/Humidity Meter	RTS	RTS-8S	AC2-TH	2019.09.02	2020.09.01
Coaxial Cable	Huber+Suhner	RG 214	AC2-C	2020.04.13	2021.04.12
Dekra test software	Dekra	-	-	-	-

Radiated Emission / AC5(1GHz-40GHz)(Chamber details)

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2020.05.08	2021.05.07
Preamplifier	Miteq	NSP1800-25	1364185	2020.05.06	2021.05.05
Preamplifier	QuieTek	AP-040G	CHM-0906001	2020.05.06	2021.05.05
DRG Horn	ETS-Lindgren	3117	00123988	2020.01.22	2021.01.21
Temperature/Humidity Meter	Zhichen	ZC1-2	AC5-TH	2019.09.02	2020.09.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C1	2020.04.13	2021.04.12
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2020.04.13	2021.04.12
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	AC5-C3	2020.04.13	2021.04.12
Dekra test software	Dekra	-	-	-	-

UNCERTAINTY

Uncertainties have been calculated according to the DEKRA internal document. The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%

Test item	Uncertainty
AC Power Line Conducted Emission	9kHz~150kHz: 2.80dB 150kHz~30MHz: 2.40dB
Peak Power Output	± 1.27 dB
Radiated Emission(30MHz~1GHz)	Horizontal: 30MHz~200MHz: 3.50 dB 300MHz~1GHz: 3.60 dB Vertical: 30MHz~200MHz: 3.60 dB 300MHz~1GHz: 3.50 dB
Radiated Emission(1GHz~26.5GHz)	Horizontal: 1GHz~18GHz: 5.00 dB Vertical: 1GHz~18GHz: 4.80 dB
RF antenna conducted test	± 1.27 dB
Radiated Emission Band Edge	± 3.9 dB
DTS Bandwidth	± 150 Hz
Occupied Bandwidth	± 1 kHz
Power Density	± 1.27 dB

1 GENERAL INFORMATION

1.1 General Description of the Item(s)

Product Name..... :	GPS Tracker
Model No. :	HKL-1MU,HKS-1MU,HKO-1MU
Trademark	KAGA
FCC ID	BXTHKS1MU
Manufacturer..... :	eSky wireless Inc
Manufacturer Address..... :	22-303,#328 xinghu street ,suzhou ,China

Wireless specification..... :	Bluetooth 4.2
Operating frequency range(s)	2400~2483.5MHz
Type of Modulation..... :	GFSK
Number of channel..... :	40
Operating Temperature Range..... :	-40°C – 70°C

Rated power supply	Voltage and Frequency	
	☐	AC: 220 – 240 V, 50/60 Hz
	☐	AC: 100 – 240 V, 50/60 Hz
	☒	DC: 12Vdc
	☐	Battery: 3.7V
Mounting position..... :	☐	Table top equipment
	☐	Wall/Ceiling mounted equipment
	☐	Floor standing equipment
	☐	Hand-held equipment
	☒	Other:

Note: All the information are from the client.

1.2 Antenna Information

Antenna model / type number	PIFA antenna		
Antenna serial number	N/A		
Antenna Delivery	☒	1TX + 1RX	
	☐	2TX + 2RX	
Antenna technology	☒	SISO	
	☐	MIMO	☐ CDD
			☐ Beam-forming
Antenna Type	☐	External	☐ Dipole
			☐ Sectorized
	☒	Internal	☐ PIFA
			☐ PCB
			☒ Metal Monopole Antenna
			☐ Others.....
Antenna Gain.....	-0.5 dBi		

Note: All the information are from the client.

1.3 Model difference description

The difference among the three models are that CAN-BUS and Interface (connector), others part are the same(include the RF module).

	TCU		
	TCU-CAN(L) HKL-1MU	TCU-STD HKS-1MU	TCU-OBD HKO-1MU
Cellular Module	EG25-G (Quectel)		
Cellular Function	Packet, SMS		
GNSS	GPS/QZSS, Galileo, GLONASS, BeiDou (1.5m CEP-50)		
MCU	32 bit MCU (ARM Cortex-M3 Flash128KB+SRAM64KB)		
LED Indicator	Power, Cellular, GNSS		
Switch	Reboot		
Sensor	Accelerometer	Accelerometer, Pulse (Hall Effect)	Accelerometer
Cellular Antenna	Internal FPC Antenna		
GPS Antenna	Internal Ceramic Passive Antenna		
CAN-BUS	CAN 500K/250K	N/A	CAN 500K/250K Rx only (ES1: remove)
Terminal Resistance	N/A	N/A	N/A
SIM	4FF SIM Card		
Interface (connector)	Sumitomo 6187-4441, HM waterproof, 4pin, Male		OBDII
	VIN, GND, CAN_H, CAN_L	VIN, GND, (CANL, CANH)	VIN, GND, CAN_H, CAN_L
Internal Battery	Li Battery 750 mAh		
Bluetooth	Bluetooth LE (Bluetooth 4.2)		

Note: All the information are from the client.

1.4 Channel List

Bluetooth Working Frequency of Each Channel: (For V4.2)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2404 MHz	02	2406 MHz	03	2408 MHz
04	2410 MHz	05	2412 MHz	06	2414 MHz	07	2416 MHz
08	2418 MHz	09	2420 MHz	10	2422 MHz	11	2424 MHz
12	2426 MHz	13	2428 MHz	14	2430 MHz	15	2432 MHz
16	2434 MHz	17	2436 MHz	18	2438 MHz	19	2440 MHz
20	2442 MHz	21	2444 MHz	22	2446 MHz	23	2448 MHz
24	2450 MHz	25	2452 MHz	26	2454 MHz	27	2456 MHz
28	2458 MHz	29	2460 MHz	30	2462 MHz	31	2464 MHz
32	2466 MHz	33	2468 MHz	34	2470 MHz	35	2472 MHz
36	2474 MHz	37	2476 MHz	38	2478 MHz	39	2480 MHz

2 DESCRIPTION OF TEST SETUP

2.1 Operating mode(s) used for tests

During the tests the following operating mode(s) has(have) been used.

Test Mode For Bluetooth	Mode 1: Transmit by LE_1Mbps(GFSK_LE)
	Mode 2: Normal Operation


2.2 Auxiliary equipment / Test software for the EUT

Auxiliary equipment	Type / Version	Manufacturer	Supplied by
Notebook	E470	Lenovo	N/A
software	Type / Version	Manufacturer	Supplied by
HueApprobationTool	1.1.00	GE	N/A


2.3 Test Configuration / Block diagram used for tests

Test setup Diagram- AC Line Conducted Emission Test

Chamber

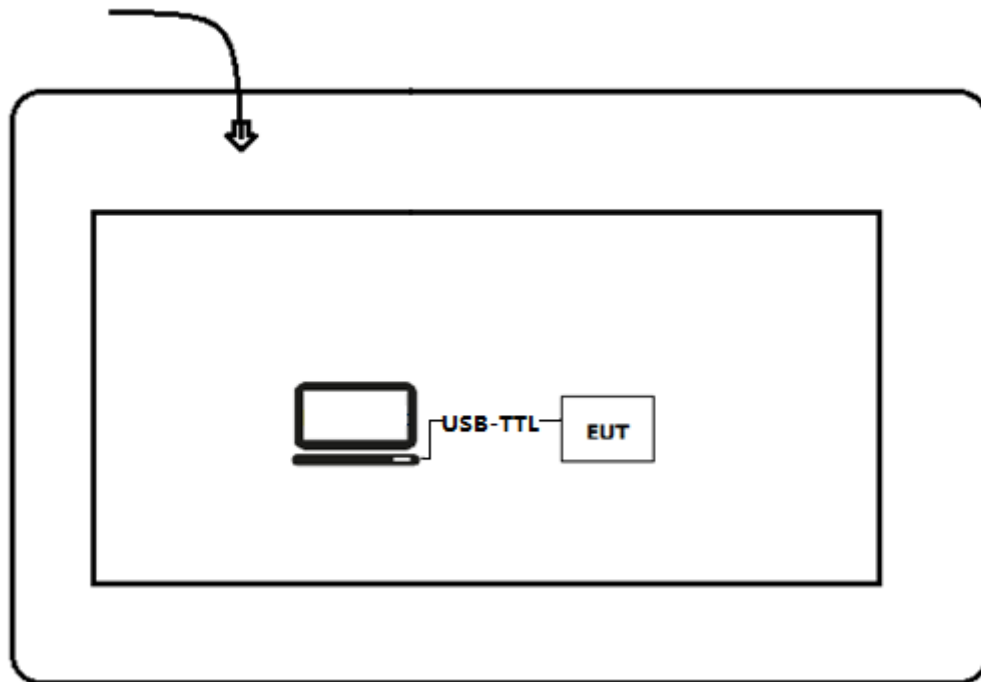

Test setup Diagram- Conducted test

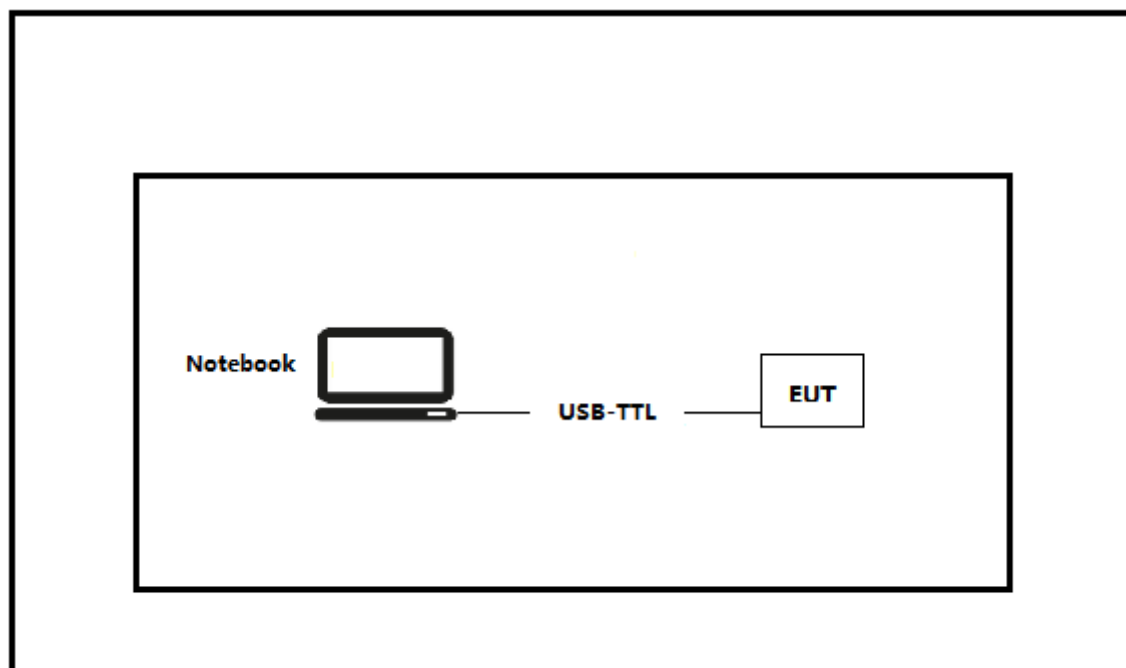

2.4 Testing process

1	Setup the EUT as shown in Section 2.4.
2	Execute the nRFgo Studio on the EUT
3	Configure the test mode, the test channel, and the data rate.
4	Press “Start Test” to start the continuous Transmitter.
5	Verify that the EUT works properly.

3 VERDICT SUMMARY SECTION

This chapter presents an overview of standards and results. Refer to the next chapters for details of measured test results and applied test levels.

3.1 Standards

Standard	Year	Description
FCC CFR Title 47 Part 15 Subpart C Section 15.247	2019	Operation within the bands 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz.
ANSI C63.10	2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074 D01 v05r02	2019	Guidance for performing compliance measurements on Digital Transmission System (DTS) operating under section 15.247

3.2 Deviation(s) from the Standard(s) / Test Specification(s)

The following deviation(s) was / were made from the published requirements of the listed standards: N/A.

(Please define the deviations from the standard(s) if applicable)

3.3 Overview of results

For FCC

Requirement – Test case	Basic standard(s)	Verdict	Remark
AC Power Line Conducted Emission	FCC 15.207	PASS	---
Emissions in restricted frequency bands	FCC 15.247(b)(3)	PASS	---
Duty cycle	ANSI C63.10:2013	PASS	---
Emissions in non-restricted frequency bands	FCC 15.247(d), FCC 15.209	PASS	---
Radiated Emission Band Edge	FCC 15.247(d)	PASS	---
Fundamental emission output power	FCC 15.247(d), FCC 15.209	PASS	---
DTS Bandwidth	FCC 15.247(a)(2)	PASS	---
Power Spectral Density	FCC 15.247(e)	PASS	---
Antenna Requirement	FCC 15.203	PASS	---

3.4 Test Facility

USA	:	FCC Designation Number: CN1199
CA	:	ISED CAB identifier: CN0040

4 TEST RESULTS

4.1 AC Power Line Conducted Emission

VERDICT: PASS

4.1.1 Limit

Standard	FCC Part 15 Subpart C Paragraph 15.207	
Frequency range [MHz]	Limit: QP [dB(μV) ¹⁾]	Limit: AV [dB(μV) ¹⁾]
0,15 - 0,50	66 - 56 ²⁾	56 - 46 ²⁾
0,50 - 5,0	56	46
5,0 - 30	60	50


¹⁾ At the transition frequency, the lower limit applies.

²⁾ The limit decreases linearly with the logarithm of the frequency.

NOTE 1: The exclusion band for transmitters shall be considered for transmitters operating at frequencies below 30 MHz.

NOTE 2: Where the AC output port is directly connected (or via a circuit breaker) to the AC power input port of the EUT the AC power output port need not to be tested.

4.1.2 Test Setup

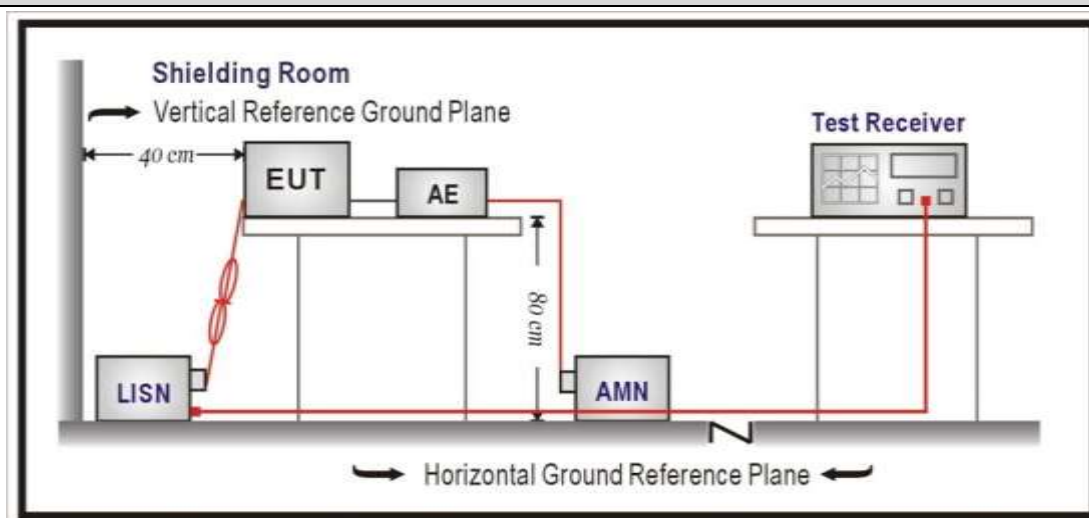

4.1.3 Test Procedure

	References Rule	Chapter	Item
☒	ANSI C63.10-2013	6.2	Standard test method for ac power-line conducted emissions from unlicensed wireless devices

4.1.4 Test Data

The product is powered by DC power supply, so there is no need to test this item

4.2 Emissions in restricted frequency bands**VERDICT: PASS****4.2.1 Limit****Standard** FCC Part 15 Subpart C Paragraph 15.207**Restricted Bands of operation**

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.81425 – 8.81475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4	3600 – 4400	
13.36 – 13.41			

Restricted Bands of operation for IC

0.090 - 0.110	13.36 - 13.41	960 - 1427	9.0 - 9.2
0.495 - 0.505	16.42 - 16.423	1435 - 1626.5	9.3 - 9.5
2.1735 - 2.1905	16.69475 - 16.69525	1645.5 - 1646.5	10.6 - 12.7
3.020 - 3.026	16.80425 - 16.80475	1660 - 1710	13.25 - 13.4
4.125 - 4.128	25.5 - 25.67	1718.8 - 1722.2	14.47 - 14.5
4.17725 - 4.17775	37.5 - 38.25	2200 - 2300	15.35 - 16.2
4.20725 - 4.20775	73 - 74.6	2310 - 2390	17.7 - 21.4
5.677 - 5.683	74.8 - 75.2	2483.5 - 2500	22.01 - 23.12
6.215 - 6.218	108 - 138	2655 - 2900	23.6 - 24.0
6.26775 - 6.26825	149.9 - 150.05	3260 - 3267	31.2 - 31.8
6.31175 - 6.31225	156.52475 - 156.52525	3332 - 3339	36.43 - 36.5
8.291 - 8.294	156.7 - 156.9	3345.8 - 3358	Above 38.6
8.362 - 8.366	162.0125 - 167.17	3500 - 4400	
8.37625 - 8.38675	167.72 - 173.2	4500 - 5150	
8.41425 - 8.41475	240 - 285	5350 - 5460	
12.29 - 12.293	322 - 335.4	7250 - 7750	
12.51975 - 12.52025	399.9 - 410	8025 - 8500	
12.57675 - 12.57725	608 - 614	--	

Restricted Band Emissions Limit

Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Field strength (dB $\mu\text{V/m}$)	Measurement distance (m)
0.009 - 0.49	2400/F(kHz)	48.5 – 13.8	300 _(Note 1)
0.49 - 1.705	24000/F(kHz)	33.8 - 23	30 _(Note 1)
1.705 - 30	30	29.5	30 _(Note 1)
30 - 88	100	40	3 _(Note 2)
88 - 216	150	43.5	3 _(Note 2)
216 - 960	200	46	3 _(Note 2)
Above 960	500	54	3 _(Note 2)


Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment.


Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

4.2.2 Test Setup


Below 30MHz Test Setup:

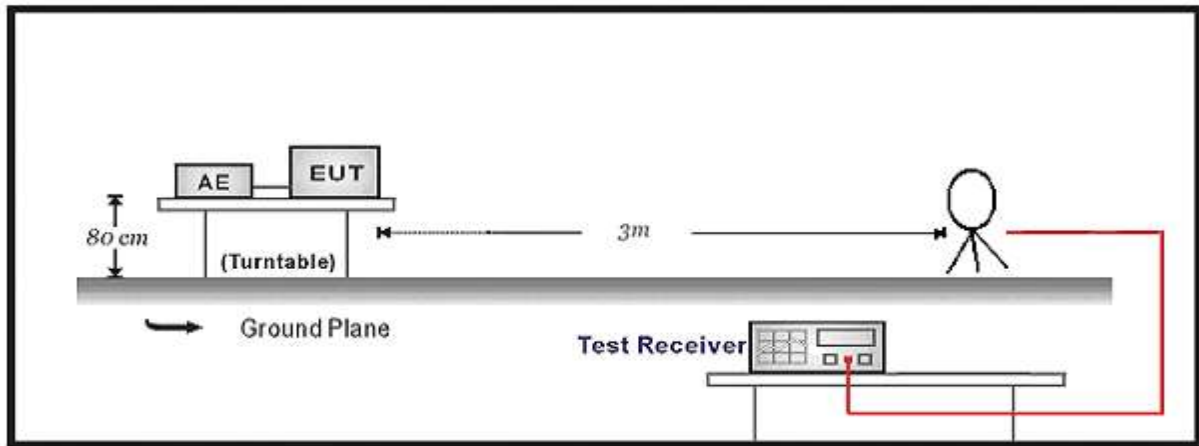

30MHz-1GHz Test Setup:

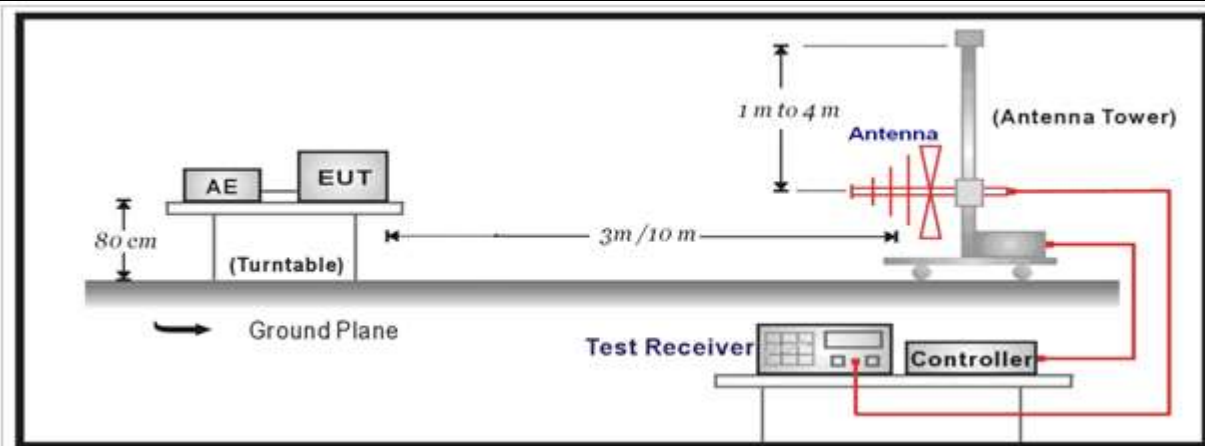

Above 1GHz Test Setup:

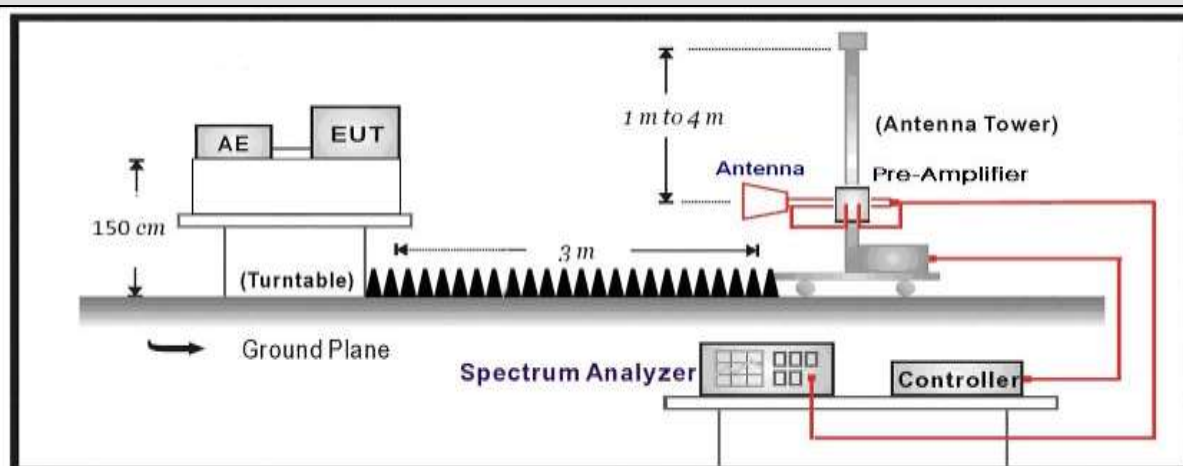


4.2.3 Test Procedure

	References Rule		Chapter	Description
☒	ANSI C63.10		11.12	Emissions in restricted frequency bands
	☒	ANSI C63.10	11.12.1	Radiated emission measurements
	☒	ANSI C63.10	11.12.2.7	Radiated spurious emission test
	☒	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
	☒	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
	☒	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz


4.2.4 Test Data

Profile: 2050503R	Page No.: 75
Engineer: YULIU	
Site: AC5	Time: 2020/07/05 - 13:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: GPS Tracker	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz by BLE	

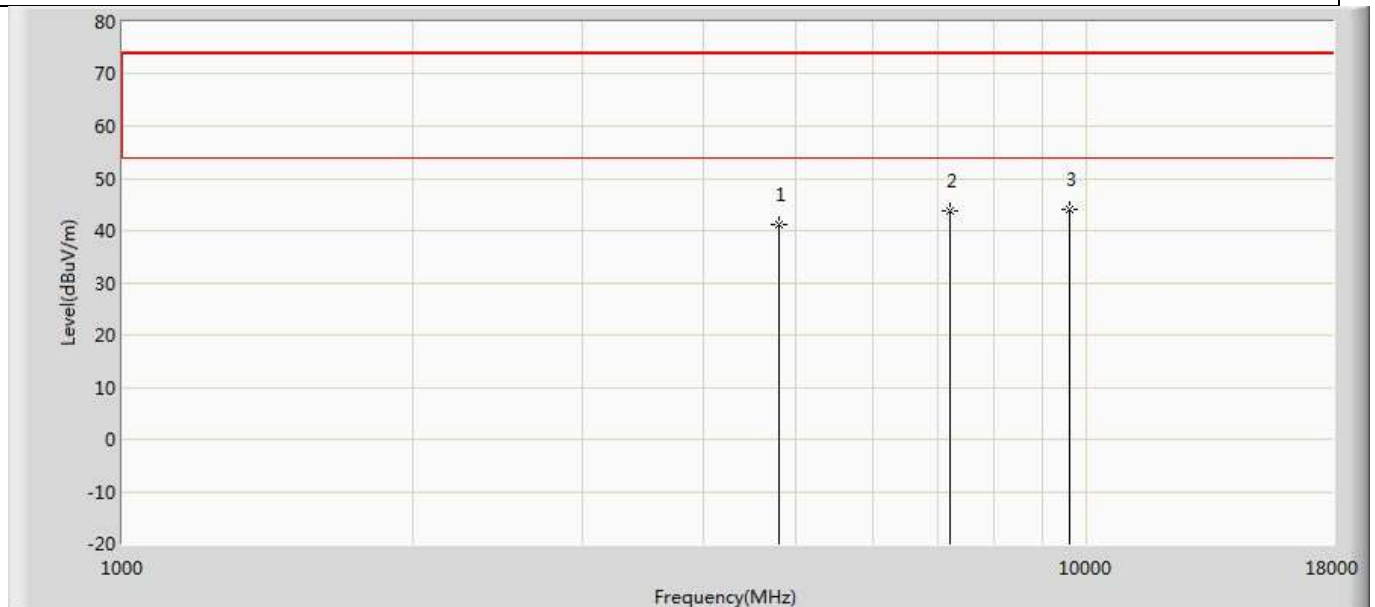


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	41.112	37.451	-32.888	74.000	3.662	PK
2		7206.000	43.836	37.173	-30.164	74.000	6.663	PK
3	*	9608.000	43.940	35.804	-30.060	74.000	8.137	PK

Profile: 2050503R	Page No.: 76
Engineer: YULIU	
Site: AC5	Time: 2020/07/05 - 13:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: GPS Tracker	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz by BLE	

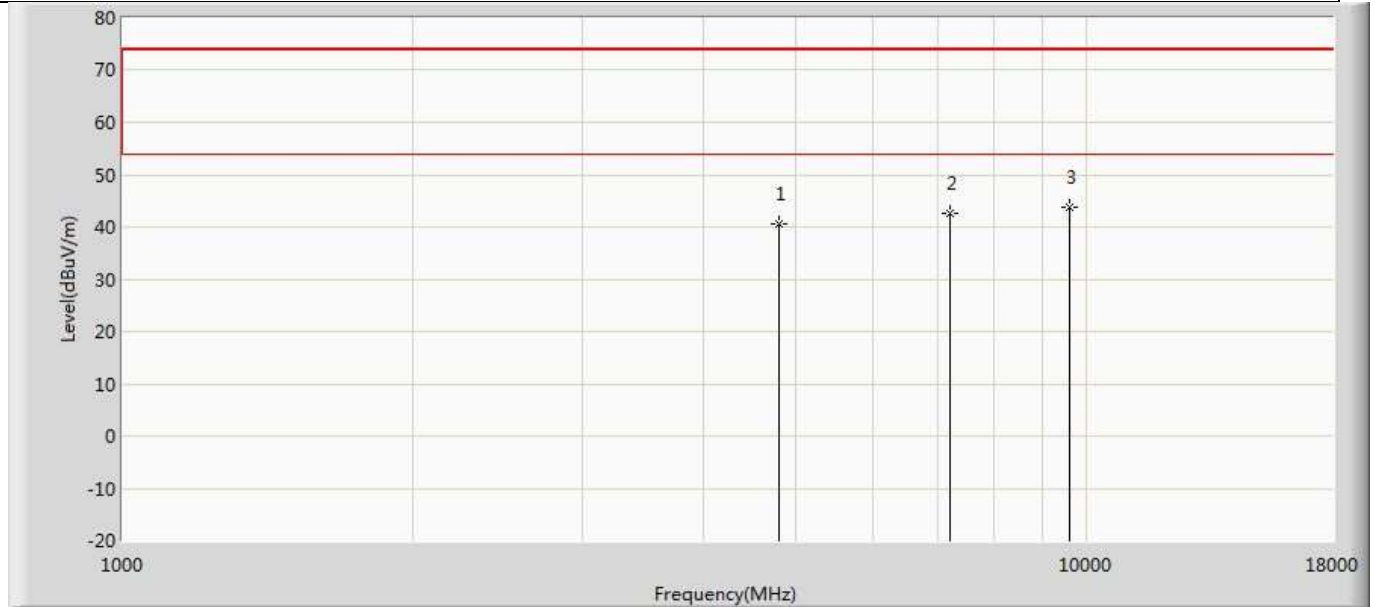


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	40.685	37.024	-33.315	74.000	3.662	PK
2		7206.000	42.702	36.039	-31.298	74.000	6.663	PK
3	*	9608.000	43.763	35.627	-30.237	74.000	8.137	PK

Profile: 2050503R	Page No.: 77
Engineer: YULIU	
Site: AC5	Time: 2020/07/05 - 13:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: GPS Tracker	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2440MHz by BLE	

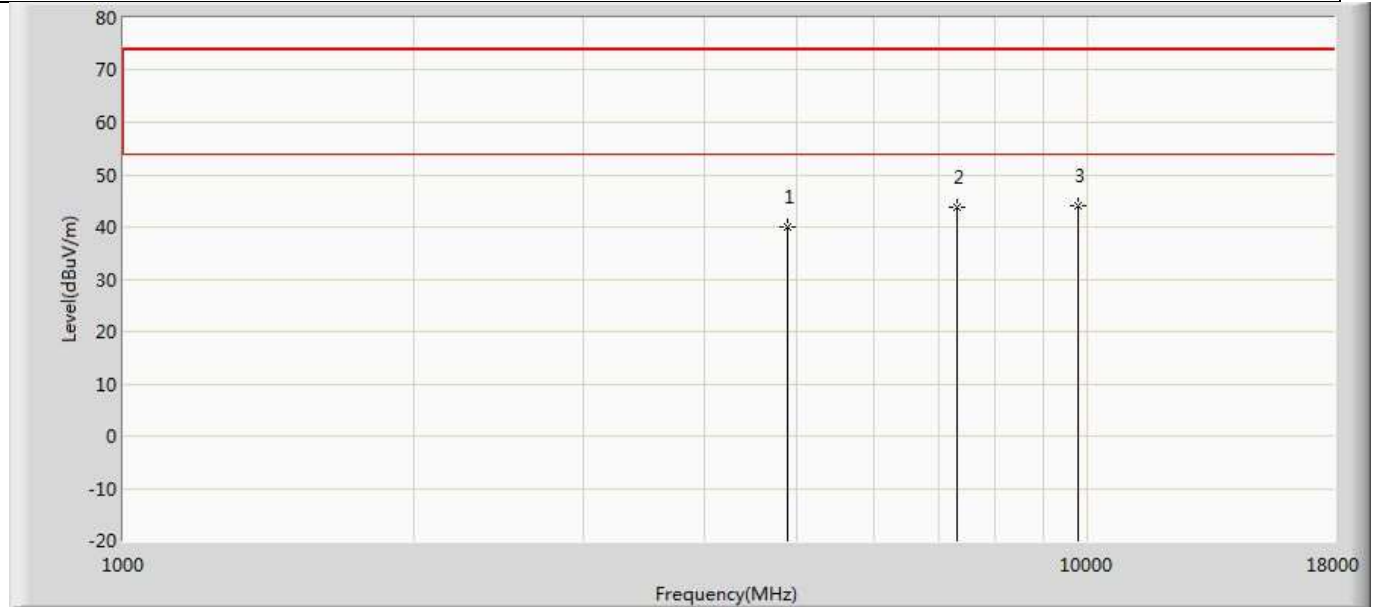


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4880.000	40.139	36.498	-33.861	74.000	3.640	PK
2		7320.000	43.657	36.972	-30.343	74.000	6.685	PK
3	*	9760.000	44.137	35.433	-29.863	74.000	8.704	PK

Profile: 2050503R	Page No.: 78
Engineer: YULIU	
Site: AC5	Time: 2020/07/05 - 13:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: GPS Tracker	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2440MHz by BLE	

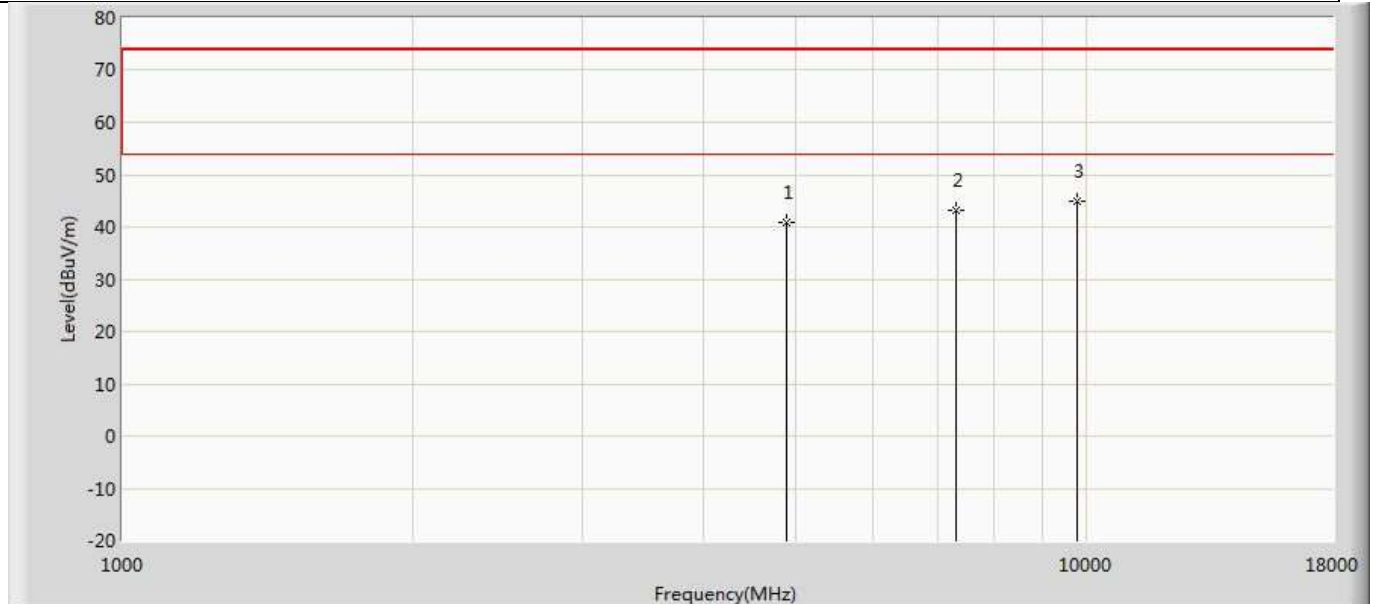


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4880.000	40.831	37.190	-33.169	74.000	3.640	PK
2		7320.000	43.152	36.467	-30.848	74.000	6.685	PK
3	*	9760.000	45.035	36.331	-28.965	74.000	8.704	PK

Profile: 2050503R	Page No.: 79
Engineer: YULIU	
Site: AC5	Time: 2020/07/05 - 13:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: GPS Tracker	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by BLE	

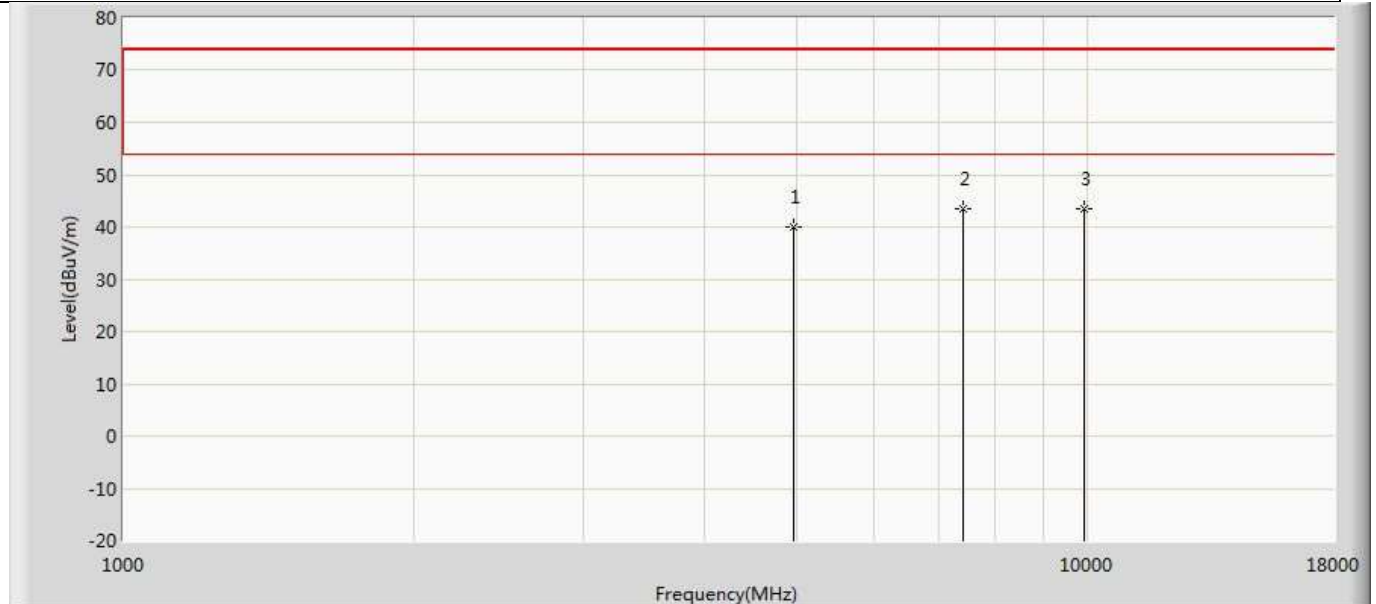

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	40.016	36.405	-33.984	74.000	3.611	PK
2	*	7440.000	43.449	36.864	-30.551	74.000	6.585	PK
3		9920.000	43.382	34.657	-30.618	74.000	8.725	PK

Profile: 2050503R	Page No.: 80
Engineer: YULIU	
Site: AC5	Time: 2020/07/05 - 13:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: GPS Tracker	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by BLE	

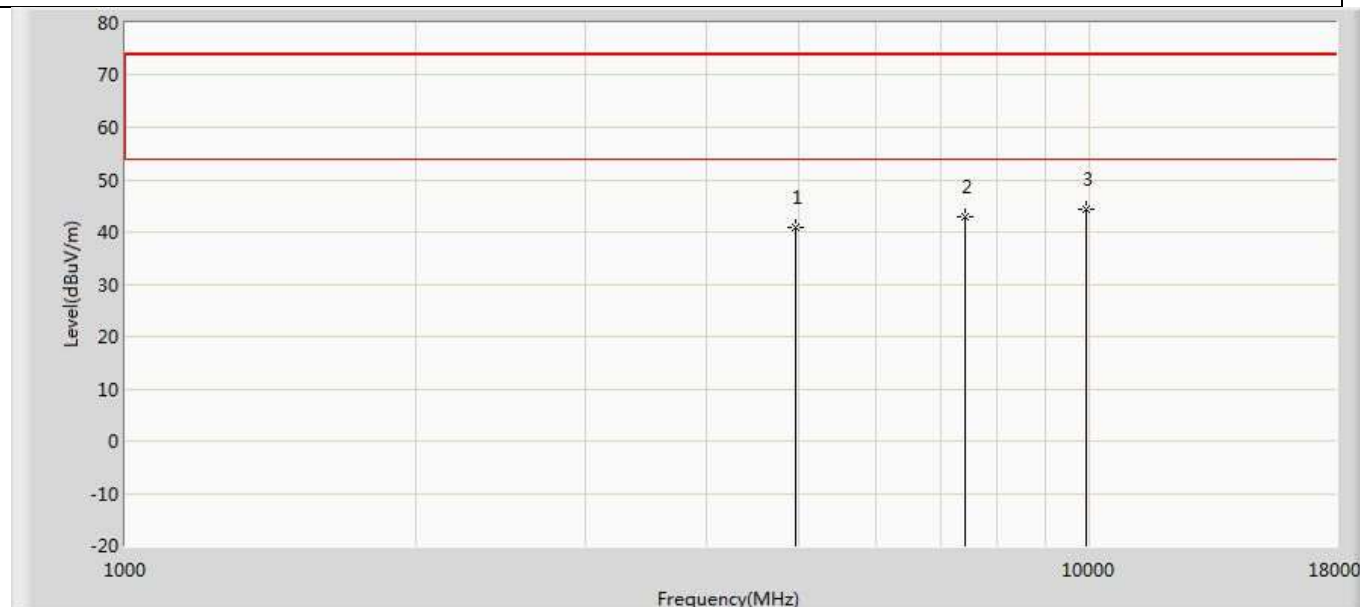


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	40.979	37.368	-33.021	74.000	3.611	PK
2		7440.000	42.951	36.366	-31.049	74.000	6.585	PK
3	*	9920.000	44.480	35.755	-29.520	74.000	8.725	PK

Remark	1. " * ", means this data is the worst emission level. 2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp). 3. The test frequency range, 9kHz~30MHz of the worst case are at least 6dB below the limits, therefore no data appear in the report. 4. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed. 5. The complete raw data please refer to Appendix RSE, Shown in the report is the worst data.
--------	---

The worst case of Radiated Emission below 1GHz:

Engineer: Wendy	
Site: AC2	Time: 2020/06/02
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: SuZ-2141	Polarity: Horizontal
EUT: GPS Tracker	Power: DC 12V
Note: Mode 1:Transmit at 2402MHz by BLE	

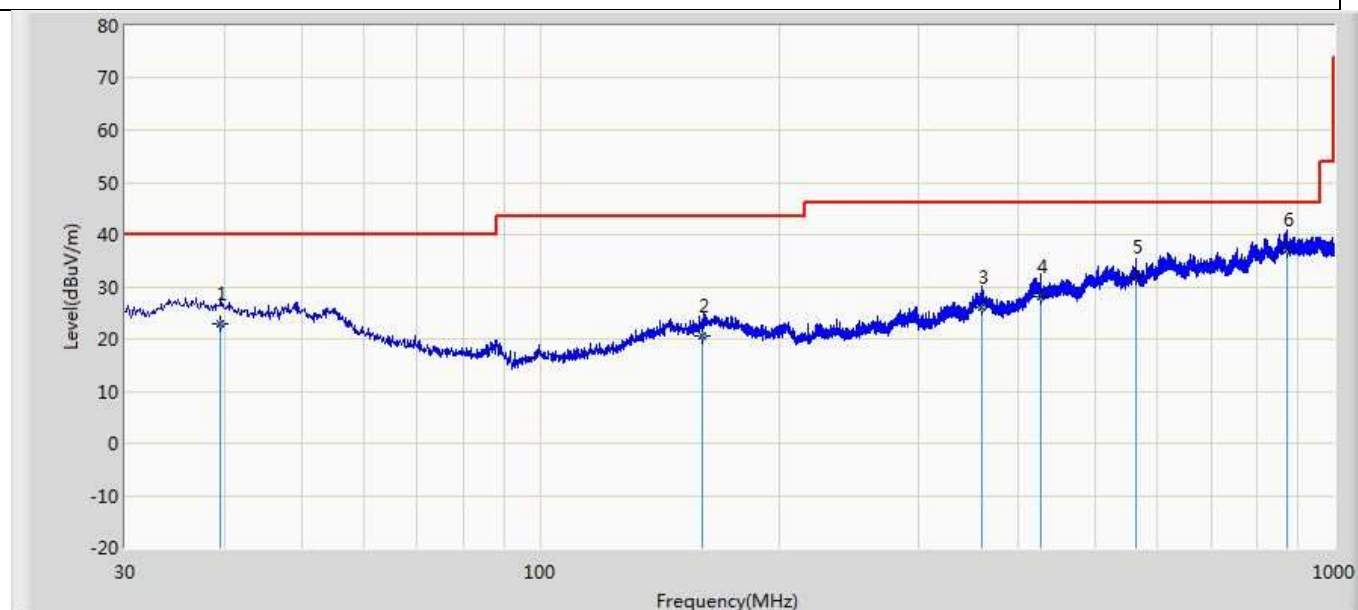


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Probe (dB/m)	Cable (dB)	Amp (dB)	Ant Pos (cm)	Table Pos (deg)	Type
1		39.560	23.008	0.231	-16.992	40.000	16.362	6.416	0.000	100	2	QP
2		160.256	20.561	1.254	-22.939	43.500	12.260	7.047	0.000	100	164	QP
3		360.251	26.231	1.254	-19.769	46.000	17.224	7.753	0.000	100	2	QP
4		426.870	28.223	1.564	-17.777	46.000	18.702	7.956	0.000	200	258	QP
5		563.980	31.762	2.456	-14.238	46.000	20.963	8.343	0.000	100	192	QP
6	*	872.658	36.987	2.154	-9.013	46.000	25.724	9.108	0.000	100	50	QP

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

Engineer: Wendy	
Site: AC2	Time: 2020/06/02
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: SuZ-2141	Polarity: Vertical
EUT: GPS Tracker	Power: DC 12V
Note: Mode 1:Transmit at 2402MHz by BLE	

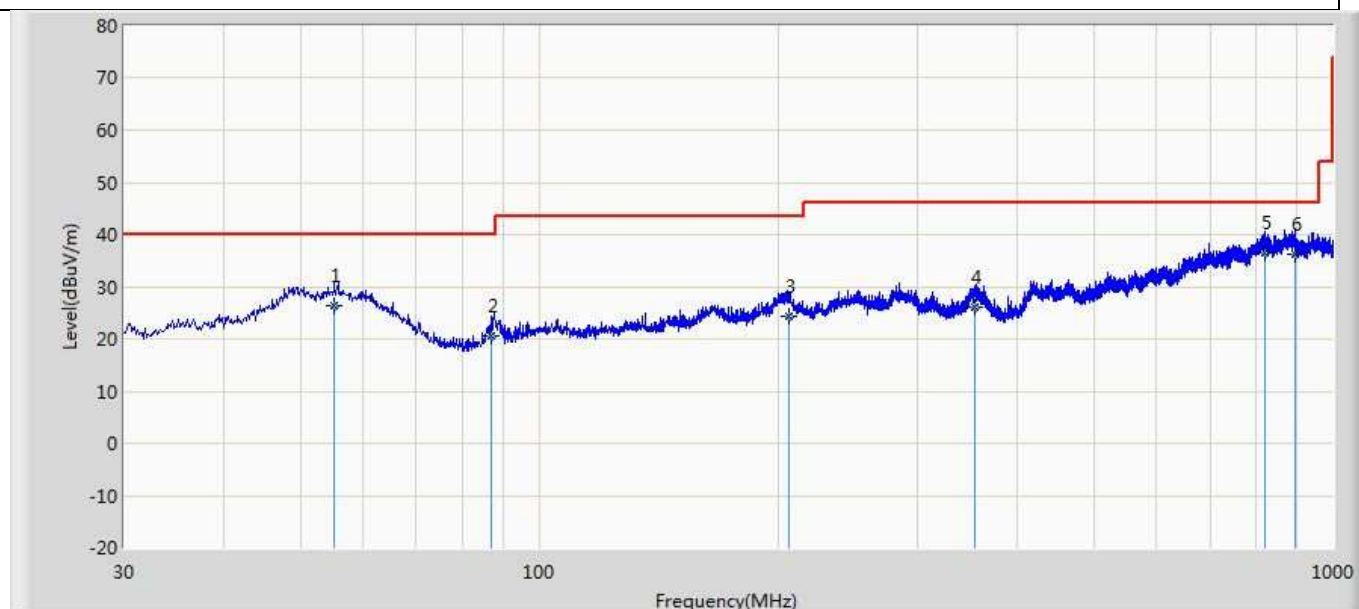

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Probe (dB/m)	Cable (dB)	Amp (dB)	Ant Pos (cm)	Table Pos (deg)	Type
1		55.126	26.444	1.450	-13.556	40.000	18.469	6.525	0.000	100	101	QP
2		87.156	20.691	6.145	-19.309	40.000	7.841	6.705	0.000	100	266	QP
3		205.950	24.426	0.164	-19.074	43.500	17.039	7.223	0.000	150	360	QP
4		354.584	26.115	0.251	-19.885	46.000	18.128	7.736	0.000	100	66	QP
5	*	820.213	36.643	1.154	-9.357	46.000	26.497	8.992	0.000	200	169	QP
6		895.640	36.210	1.256	-9.790	46.000	25.794	9.160	0.000	200	1	QP

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

4.3 Emissions in non-restricted frequency band

VERDICT: PASS


4.3.1 Limit

Standard	FCC Part 15 Subpart C Paragraph 15.247(d)
RF Output power (Detection methods)	Limit(dB)
RF Output power(Average detector)	30dBc(Note1)
RF Output power(PK detector)	20dBc(Note2)

Note 1: If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).

Note 2: If the maximum peak conducted output power procedure was used, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).

4.3.2 Test Setup

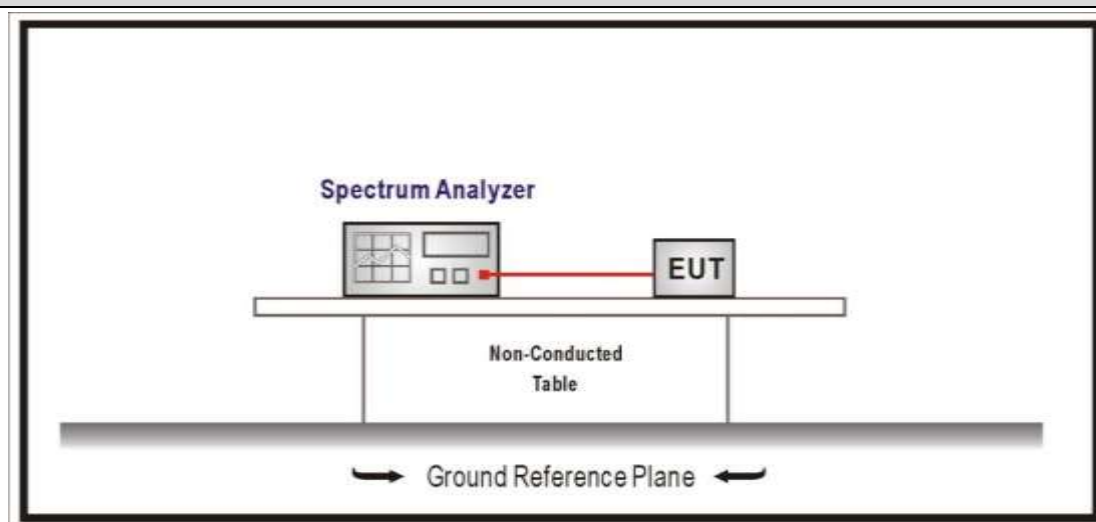


4.3.3 Test Procedure

References Rule	Chapter	Description
☒ ANSI C63.10	11.11	Emissions in non-restricted frequency bands
☒ ANSI C63.10	11.11.1	General
☒ ANSI C63.10	11.11.2	Reference level measurement
☒ ANSI C63.10	11.11.3	Emission level measurement


4.3.4 Test Data

Mode	Channel	Test Frequency (MHz)	Maximum In-Band PSD[a] (dBm/100kHz)	Frequency (MHz)	Out-Band PSD[b] (dBm/100kHz)	[a]-[b] (dB)	Limit (dB)	Result
1	00	2402	8.560	2400	-38.665	47.225	>20	Pass
	39	2480	10.154	2500	-37.028	47.182	>20	Pass

Mode 1 CH00(2402MHz)

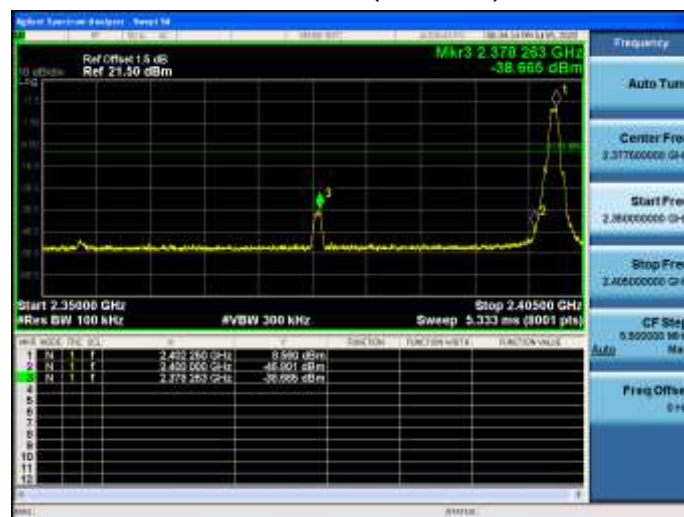

Mode 1 CH39(2480MHz)

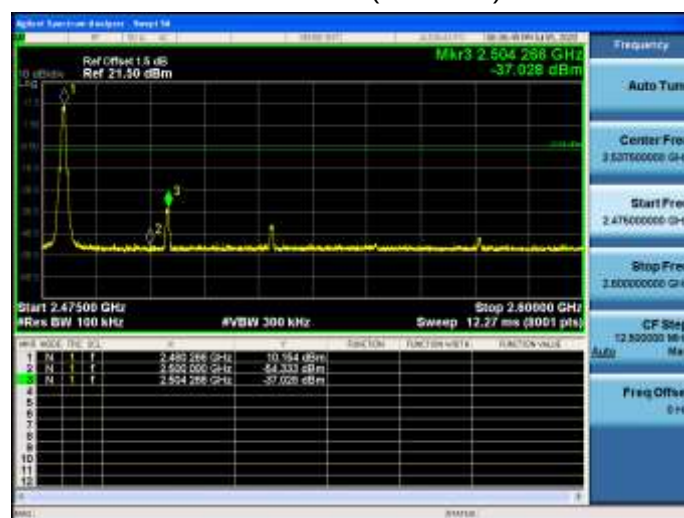


4.4 Duty cycle

VERDICT: PASS

4.4.1 Limit

N/A

4.4.2 Test Setup

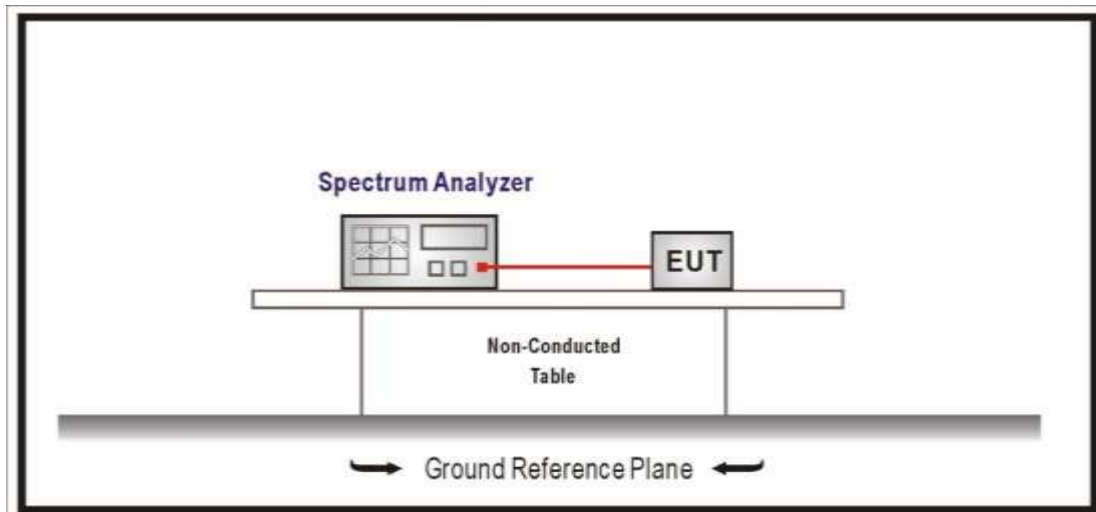

4.4.3 Test Procedure

References Rule		Chapter	Description
☒	ANSI C63.10	11.6	Duty cycle (D), transmission duration (T), and maximum power control level


4.4.4 Test Data

Test Mode	Tx On (ms)	Tx Off (ms)	VBW	Tx On + Tx Off (ms)	Duty Cycle
Mode 1	2.132	0.368	0.469	2.500	85.28%

Note 1: T means the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Note 2: According to KDB 558074, when test for Radiated Emission Band Edge and Radiated Emission, for average detector set: $VBW \geq 1/T$ will be used.

Mode 1

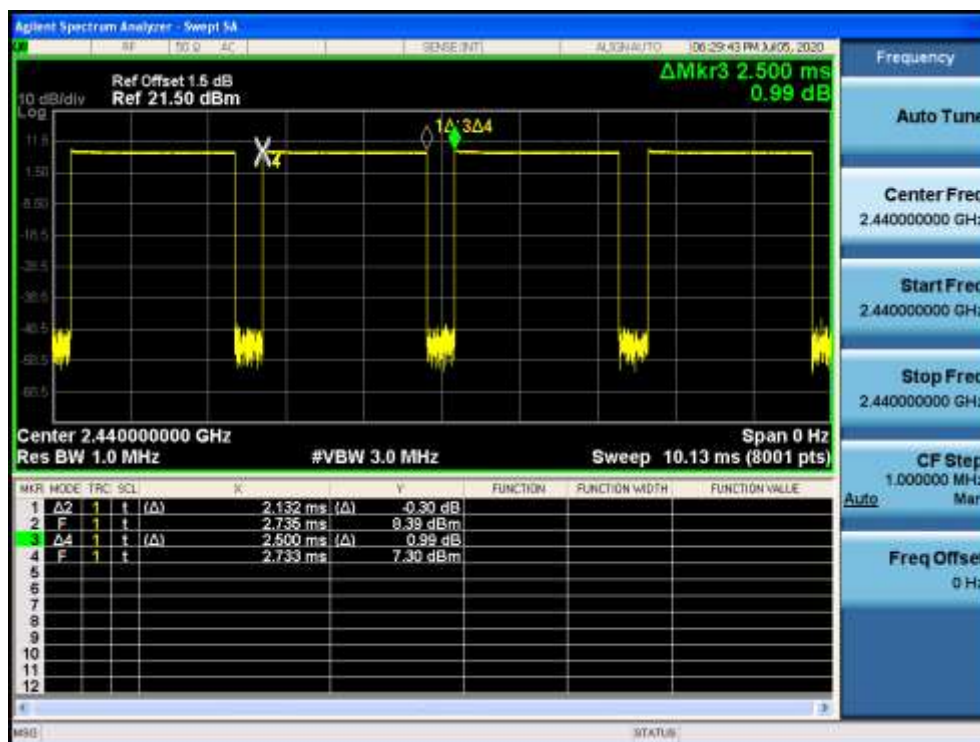


4.5 Radiated Emission Band Edge**VERDICT: PASS****4.5.1 Limit**

Standard		FCC Part 15 Subpart C Paragraph 15.247(d) , 15.209		
Frequency bands (MHz)	Detector	Limit (dB μ V/m)	RBW (MHz)	Distance (m)
2310-2390	PK	74	1	3
2483.5-2500	AV	54	1	3

Note: The field strength of emissions appearing within these frequency bands shall not exceed the limits.

4.5.2 Test Setup


Above 1GHz Test Setup:

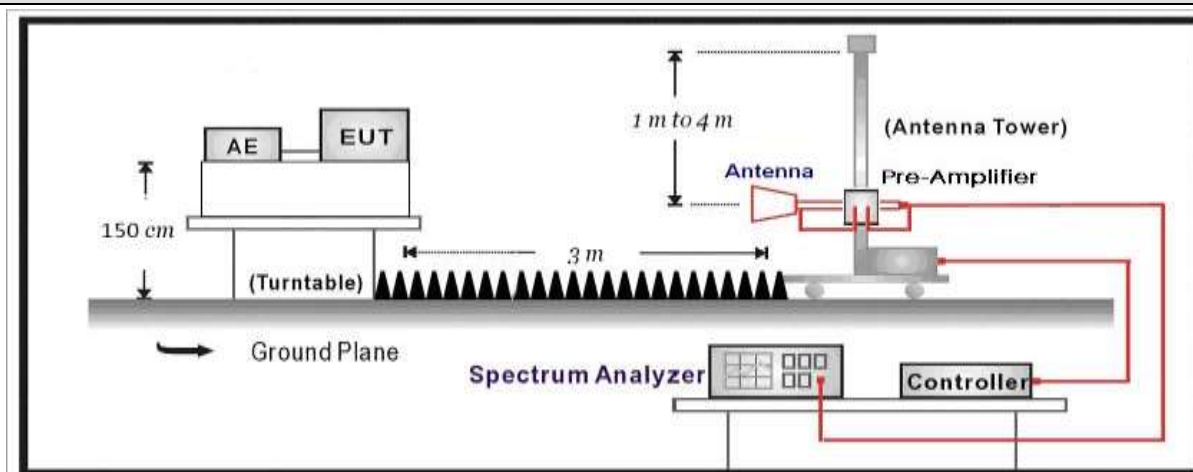**4.5.3 Test Procedure**

	References Rule	Chapter	Description
☒	ANSI C63.10	6.10	Band-edge testing
☒	☒ ANSI C63.10	6.10.5	Restricted-band band-edge measurements
☐	☐ ANSI C63.10	6.10.6	Marker-delta method
☒	ANSI C63.10	11.12	Emissions in restricted frequency bands
☒	☒ ANSI C63.10	11.12.1	Radiated emission measurements
☒	☒ ANSI C63.10	11.12.2.7	Radiated spurious emission test
☐	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
☐	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
☒	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz


4.5.4 Test Data

Profile: 2050503R	Page No.: 25
Engineer: YULIU	
Site: AC5	Time: 2020/07/05 - 11:23
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: GPS Tracker	Power: DC 12V
Note: Mode 1:Transmit at 2402MHz by BLE	

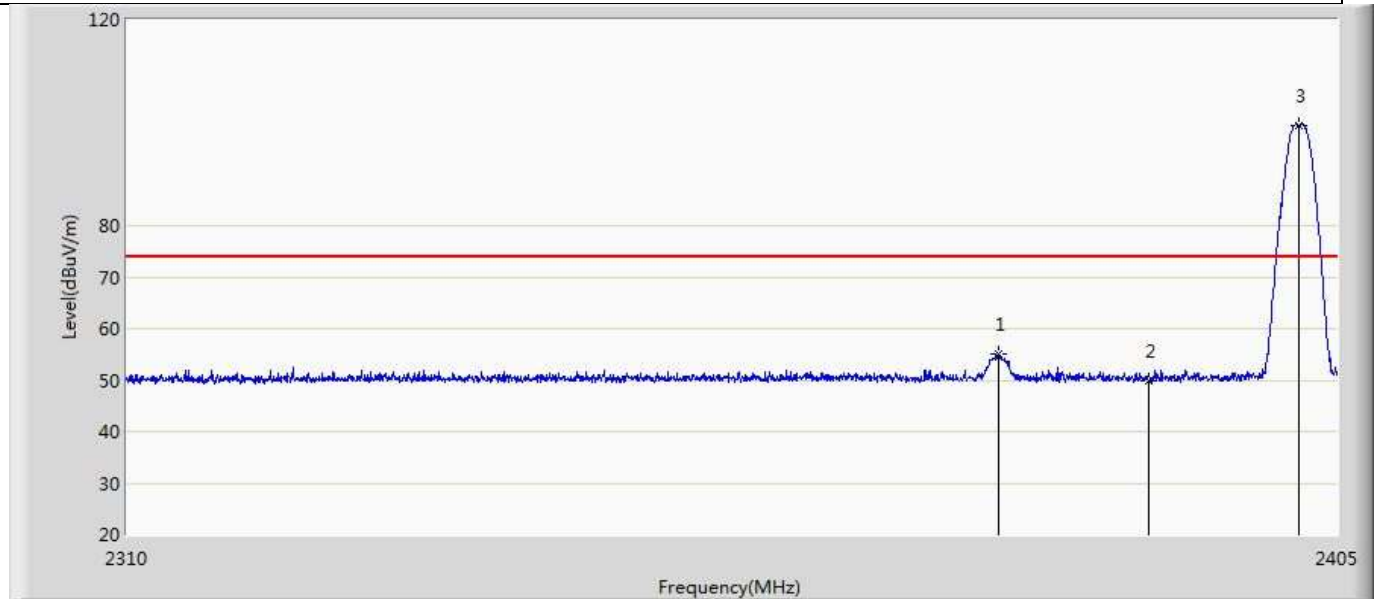


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2378.020	54.979	19.669	-19.021	74.000	35.311	PK
2		2390.000	49.767	14.452	-24.233	74.000	35.315	PK
3	*	2401.913	99.499	64.186	N/A	N/A	35.312	PK

Profile: 2050503R	Page No.: 26
Engineer: YULIU	
Site: AC5	Time: 2020/07/05 - 11:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: GPS Tracker	Power: DC 12V
Note: Mode 1:Transmit at 2402MHz by BLE	

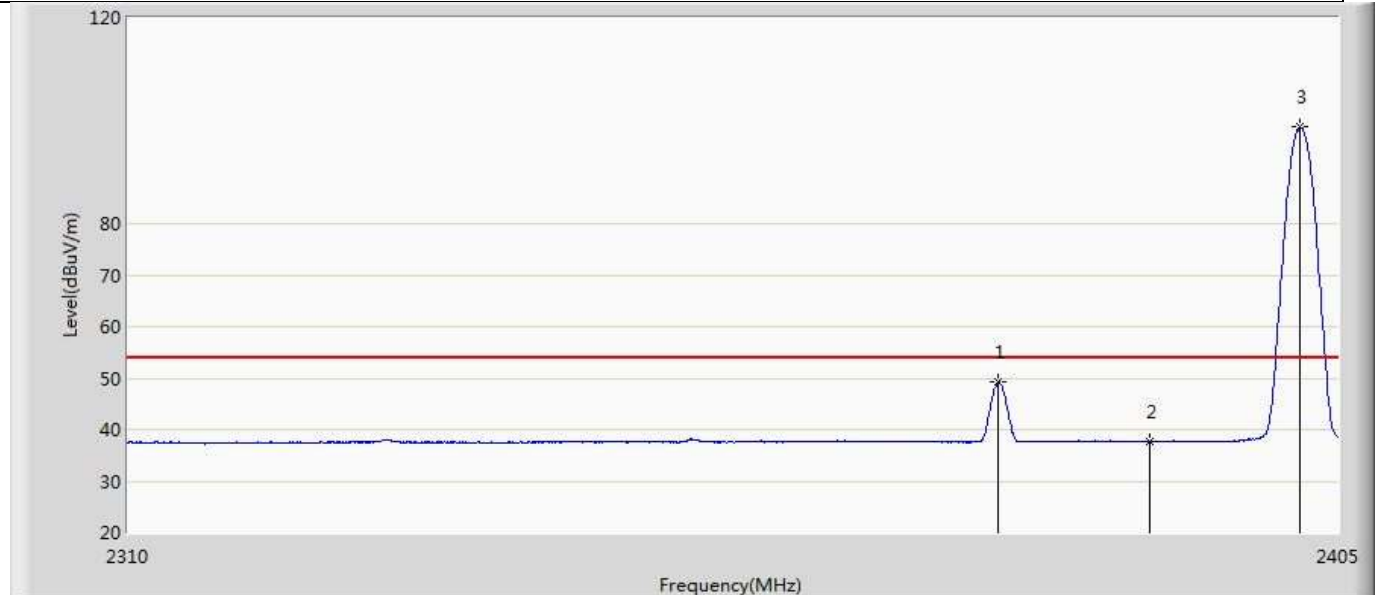


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2377.972	49.155	13.845	-4.845	54.000	35.311	AV
2		2390.000	37.710	2.395	-16.290	54.000	35.315	AV
3	*	2401.913	98.734	63.421	N/A	N/A	35.312	AV

Profile: 2050503R	Page No.: 27
Engineer: YULIU	
Site: AC5	Time: 2020/07/05 - 11:49
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: GPS Tracker	Power: DC 12V
Note: Mode 1:Transmit at 2402MHz by BLE	

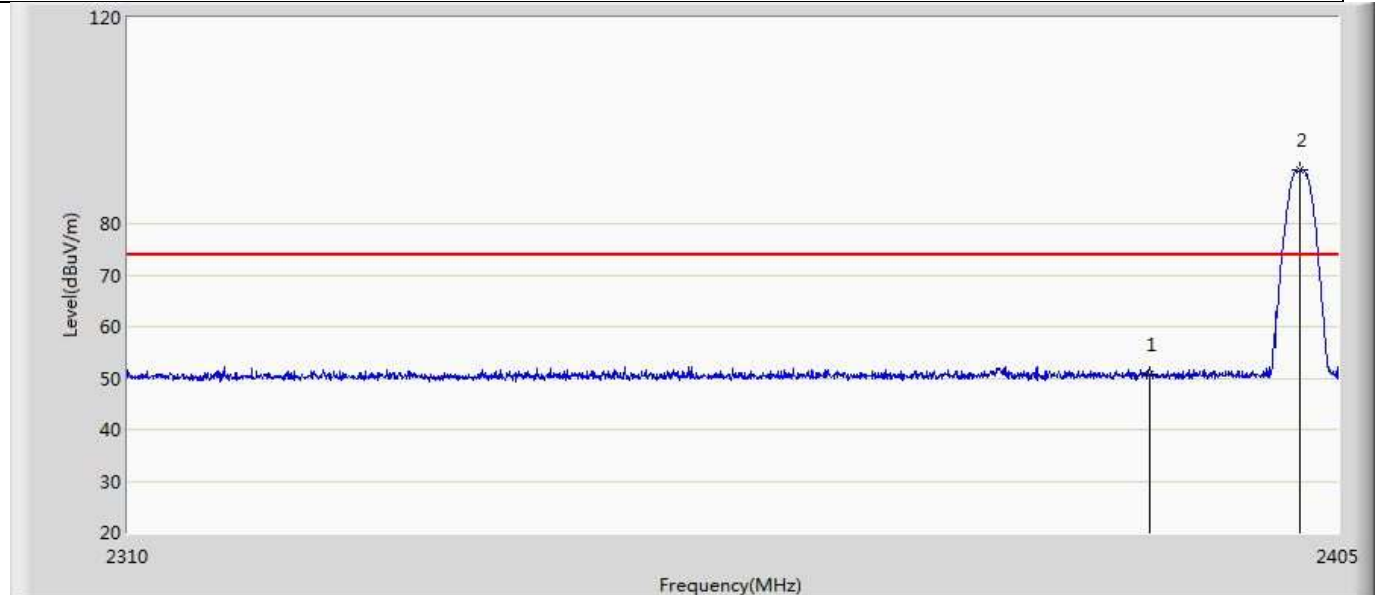


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	50.664	15.349	-23.336	74.000	35.315	PK
2	*	2402.008	90.386	55.074	N/A	N/A	35.312	PK

Profile: 2050503R	Page No.: 28
Engineer: YULIU	
Site: AC5	Time: 2020/07/05 - 11:52
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: GPS Tracker	Power: DC 12V
Note: Mode 1:Transmit at 2402MHz by BLE	

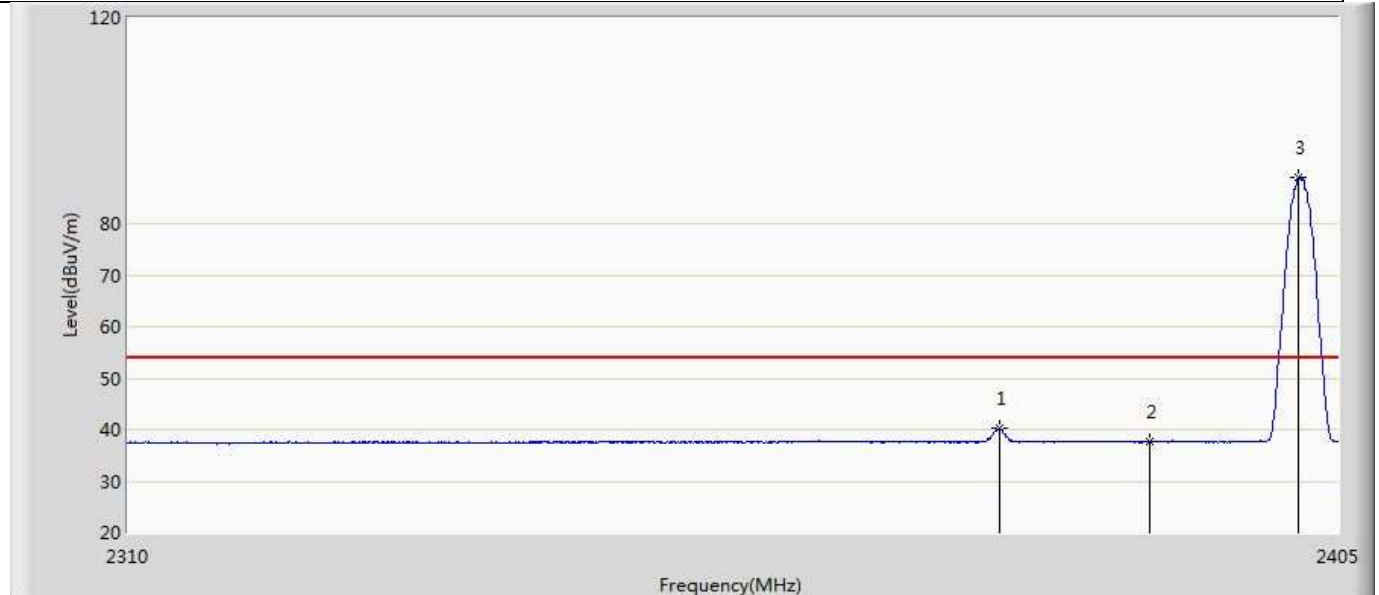


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2378.115	40.222	4.912	-13.778	54.000	35.311	AV
2		2390.000	37.582	2.267	-16.418	54.000	35.315	AV
3	*	2401.865	89.103	53.790	N/A	N/A	35.312	AV

Profile: 2050503R	Page No.: 29
Engineer: YULIU	
Site: AC5	Time: 2020/07/05 - 11:54
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: GPS Tracker	Power: DC 12V
Note: Mode 1:Transmit at 2480MHz by BLE	

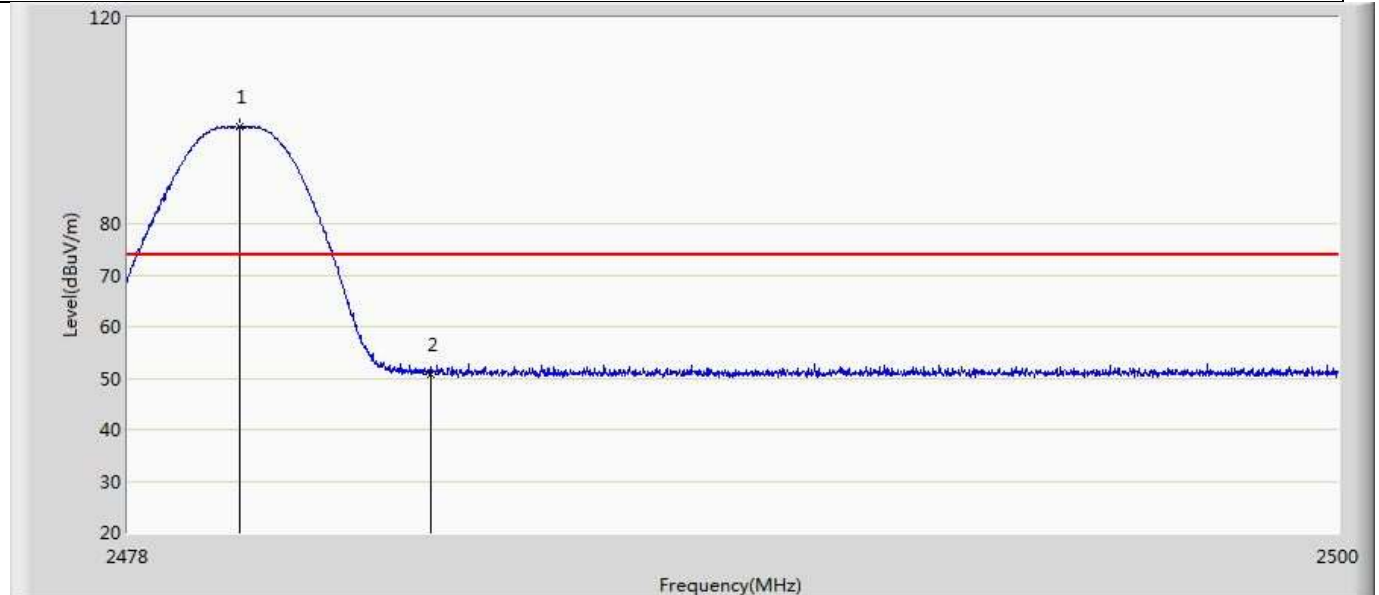


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.035	98.878	63.579	N/A	N/A	35.299	PK
2		2483.500	50.715	15.417	-23.285	74.000	35.297	PK

Profile: 2050503R	Page No.: 30
Engineer: YULIU	
Site: AC5	Time: 2020/07/05 - 12:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: GPS Tracker	Power: DC 12V
Note: Mode 1:Transmit at 2480MHz by BLE	

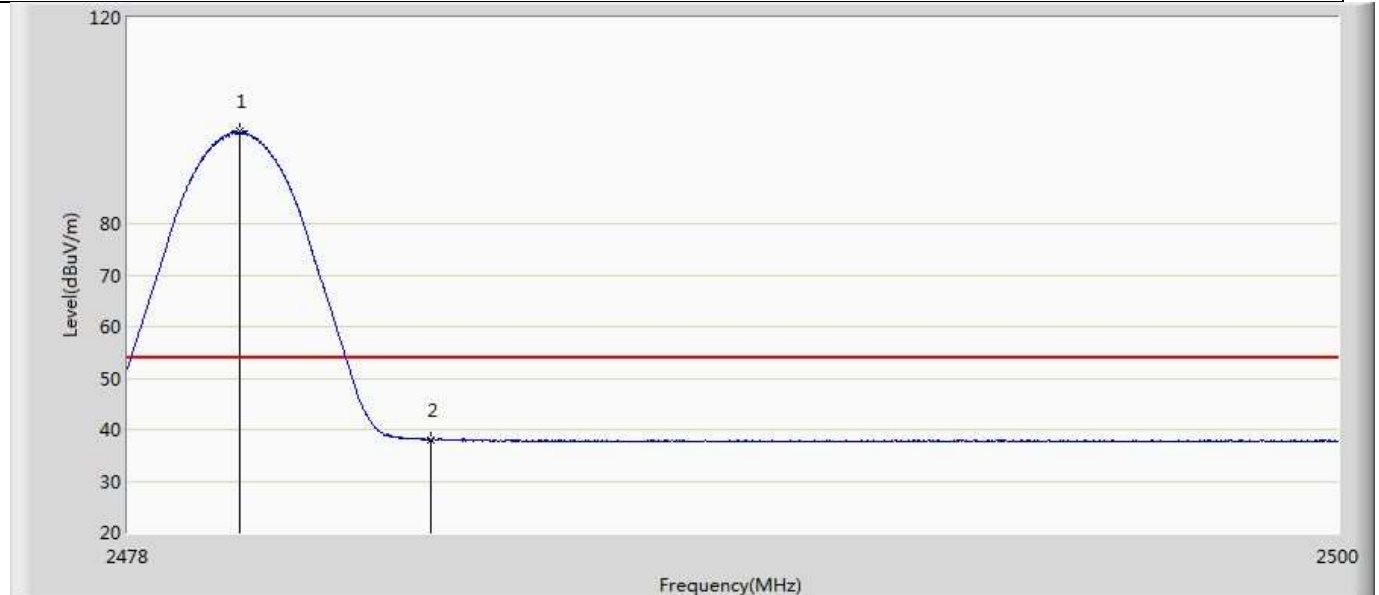


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.024	97.878	62.579	N/A	N/A	35.299	AV
2		2483.500	38.114	2.816	-15.886	54.000	35.297	AV

Profile: 2050503R	Page No.: 31
Engineer: YULIU	
Site: AC5	Time: 2020/07/05 - 12:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: GPS Tracker	Power: DC 12V
Note: Mode 1:Transmit at 2480MHz by BLE	

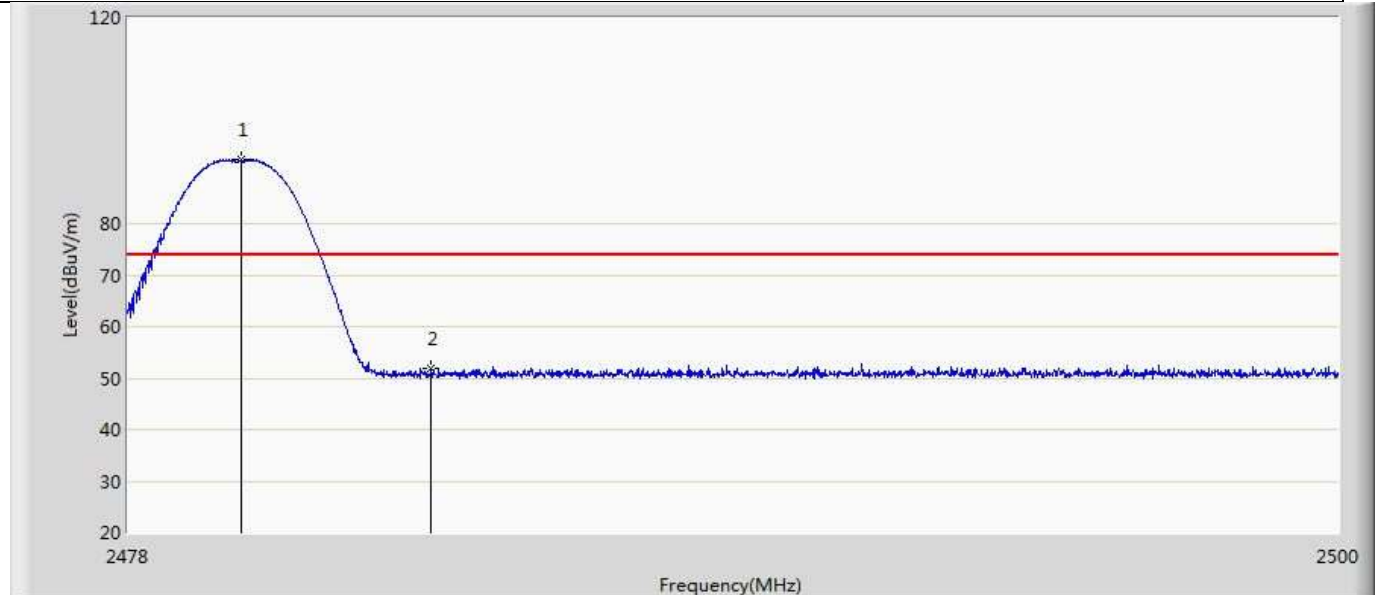

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.057	92.339	57.040	N/A	N/A	35.299	PK
2		2483.500	51.777	16.479	-22.223	74.000	35.297	PK

Profile: 2050503R	Page No.: 32
Engineer: YULIU	
Site: AC5	Time: 2020/07/05 - 12:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: GPS Tracker	Power: DC 12V
Note: Mode 1:Transmit at 2480MHz by BLE	

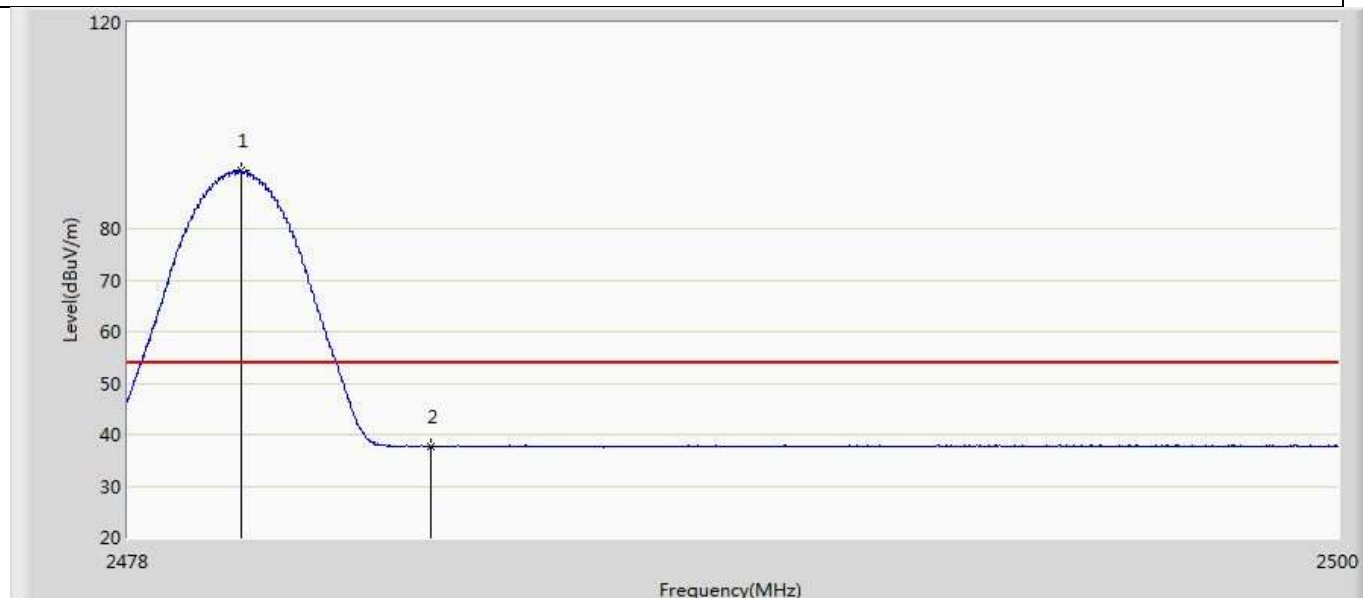

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.046	91.247	55.948	N/A	N/A	35.299	AV
2		2483.500	37.672	2.374	-16.328	54.000	35.297	AV

Note:

1. Measured Level = Reading Level + Factor.
2. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.
3. As the radiated emission was performed, so conducted emission was not tested.

4.6 DTS Bandwidth

VERDICT: PASS


4.6.1 Limit

Standard

FCC Part 15 Subpart C Paragraph 15.247 (a)(2)

Systems using digital modulation techniques operate in the 2400-2483.5 MHz. The minimum 6 dB bandwidth shall be at least 500 kHz

4.6.2 Test Setup

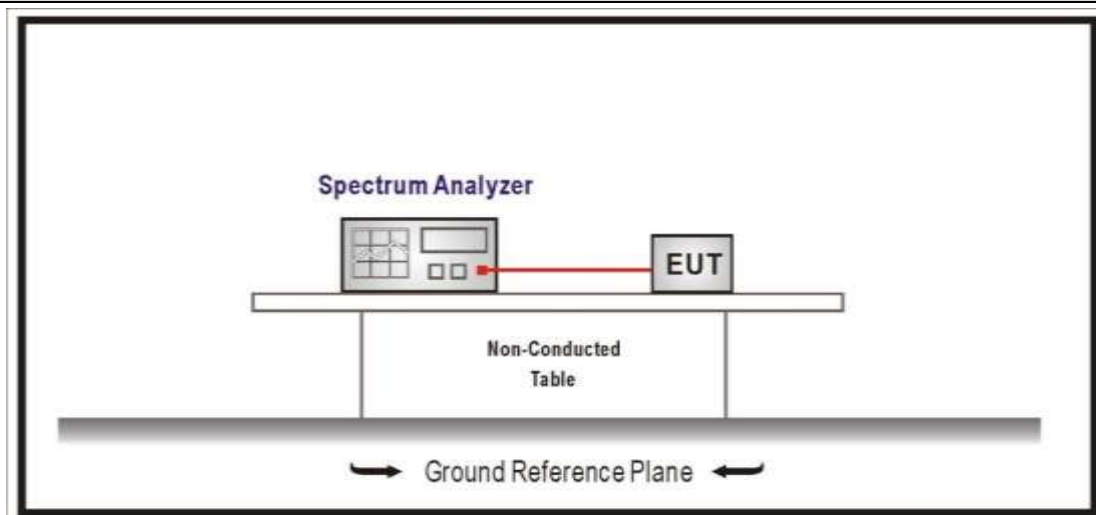

4.6.3 Test Procedure

	Reference Rule	Chapter	Description
☒	ANSI C63.10	11.8	DTS bandwidth
☐	ANSI C63.10	11.8.1	Option 1
☒	ANSI C63.10	11.8.2	Option 2


4.6.4 Test Data

Mode	CH.	Test Freq. (MHz)	99% Occupied Bandwidth (MHz)	6dB Occupied Bandwidth (KHz)	Limit (kHz)	Result
1	00	2402	1.0562	685.3	>500	Pass
	19	2440	1.0569	679.8	>500	Pass
	39	2480	1.0575	683.7	>500	Pass

Note : The worst case of Occupied Bandwidth as below in next page:


99% Occupied Bandwidth

Mode 1 CH20 (2442MHz)

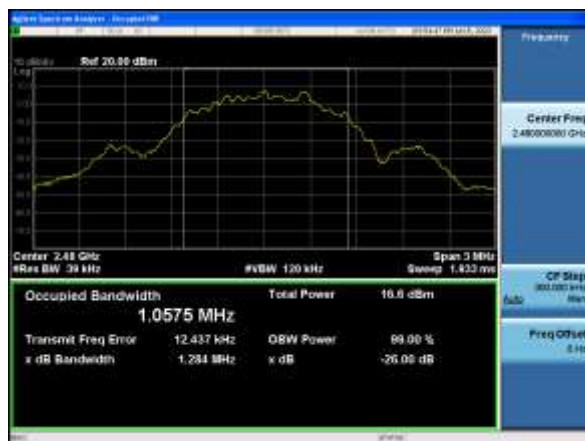

6dB Occupied Bandwidth

Mode 1 CH20 (2442MHz)

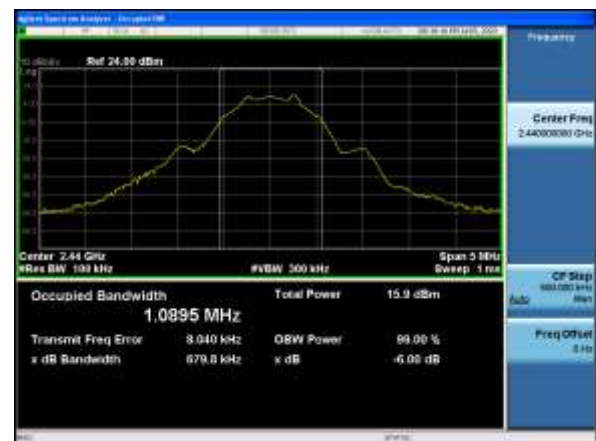

4.7 Fundamental emission output power

VERDICT: PASS


4.7.1 Limit

Standard		FCC Part 15 Subpart C Paragraph 15.247 (b)(3)
☒	GTX < 6dBi	$P_{out} \leq 30\text{dBm}$
☐	GTX > 6dBi	
☐	Non-Fix point-point	$P_{out} \leq 30 - (GTX - 6)$
☐	Fix point-point	$P_{out} \leq 30 - [(GTX - 6)]/3$
☐	Point-to-multipoint	$P_{out} \leq 30 - (GTX - 6)$
☐	Overlap Beams	$P_{out} \leq 30 - [(GTX - 6)]/3$
☐	Aggregate power transmitted simultaneously on all beams	$P_{out} \leq 30 - [(GTX - 6)]/3$
☐	single directional beam	$P_{out} \leq 30 - [(GTX - 6)]/3 + 8\text{dB}$

Note 1 : GTX directional gain of transmitting antennas.

Note 2 : P_{out} is maximum peak conducted output power .

4.7.2 Test Setup

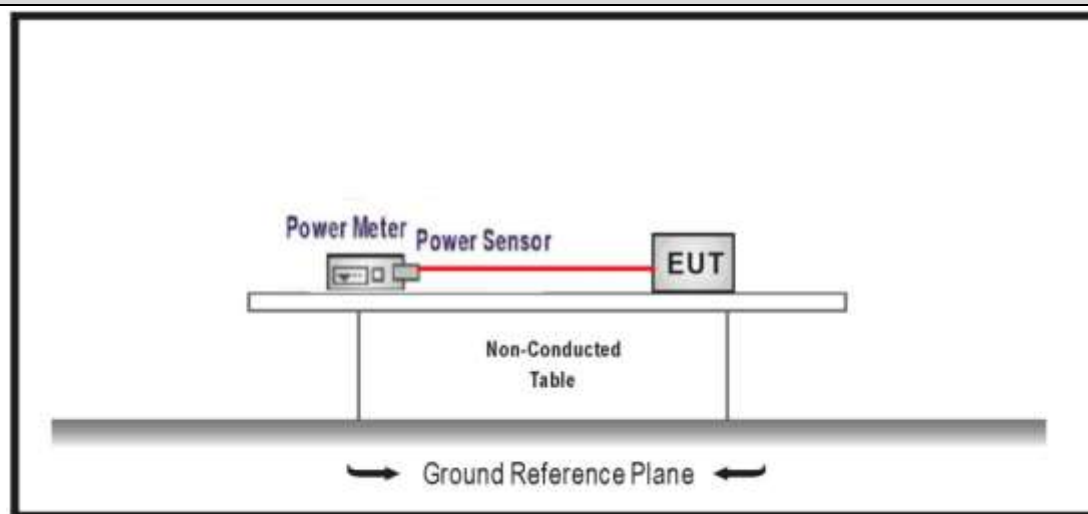

4.7.3 Test Procedure

	References Rule			Chapter	Description		
☒	ANSI C63.10			11.9	Fundamental emission output power		
	☒	ANSI C63.10			11.9.1	Maximum peak conducted output power	
		☐	ANSI C63.10		11.9.1.1	RBW ≥ DTS bandwidth	
		☐	ANSI C63.10		11.9.1.2	Integrated band power method	
		☐	ANSI C63.10		11.9.1.3	PKPM1 Peak power meter method	
	☐	ANSI C63.10			11.9.2	Maximum conducted (average) output power	
		☐	ANSI C63.10		11.9.2.2	Measurement using a spectrum analyzer (SA)	
			☐	ANSI C63.10	11.9.2.2.2	Method AVGSA-1(Duty cycle≥98%)	
			☐	ANSI C63.10	11.9.2.2.3	Method AVGSA-1A(Duty cycle≥98%)	
			☐	ANSI C63.10	11.9.2.2.4	Method AVGSA-2(Duty cycle≤98%)	
			☐	ANSI C63.10	11.9.2.2.5	Method AVGSA-2A(Duty cycle≤98%)	
			☐	ANSI C63.10	11.9.2.2.4	Method AVGSA-3	
			☐	ANSI C63.10	11.9.2.2.5	Method AVGSA-3A	
		☒	ANSI C63.10			11.9.2.3	Measurement using a power meter (PM)
			☒	ANSI C63.10	11.9.2.3.1	Method AVGPM	
			☐	ANSI C63.10	11.9.2.3.2	Method AVGPM-G	

4.7.4 Test Data

Mode	Channel	Test Frequency (MHz)	Power Output (dBm)	Limit (dBm)	Result
Mode 1	00	2402	7.59	≤ 30	Pass
	19	2440	8.24	≤ 30	Pass
	39	2480	8.53	≤ 30	Pass

4.8 Power Density


VERDICT: PASS

4.8.1 Limit:

Standard FCC Part 15 Subpart C Paragraph 15.247 (b)(3)

 Power Spectral Density $\leq 8\text{dBm}/3\text{kHz}$

4.8.2 Test Setup

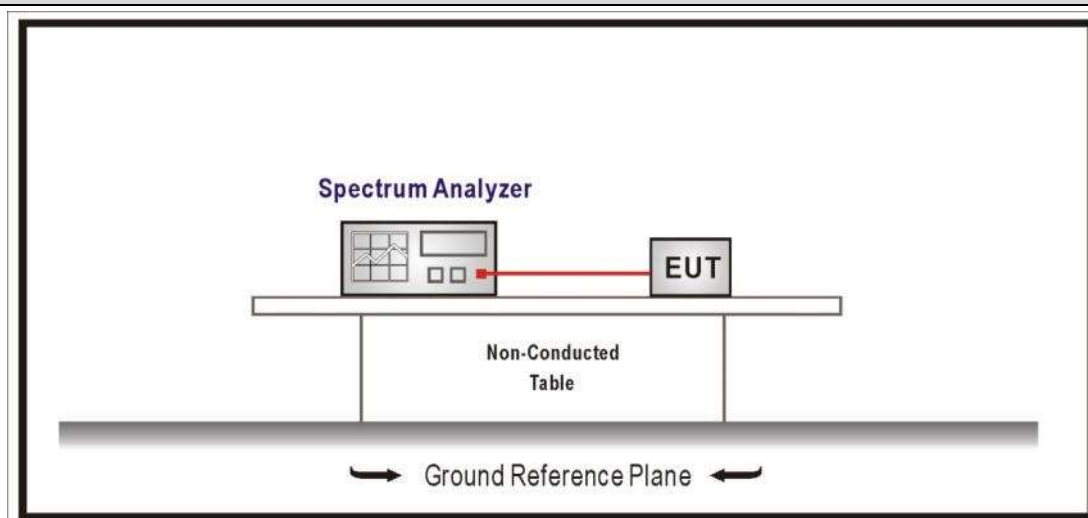

4.8.3 Test Procedure

	References Rule		Chapter	Description
☒	ANSI C63.10		11.10	Maximum power spectral density level in the fundamental emission
	☒	ANSI C63.10	11.10.2	Method PKPSD (peak PSD)
	☐	ANSI C63.10	11.10.3	Method AVGPSD-1(Duty cycle $\geq 98\%$)
	☐	ANSI C63.10	11.10.4	Method AVGPSD-1A(Duty cycle $\geq 98\%$)
	☐	ANSI C63.10	11.10.5	Method AVGPSD-2(Duty cycle $< 98\%$)
	☐	ANSI C63.10	11.10.6	Method AVGPSD-2A(Duty cycle $< 98\%$)
	☐	ANSI C63.10	11.10.7	Method AVGPSD-3
	☐	ANSI C63.10	11.10.8	Method AVGPSD-3A


4.8.4 Test Data

Mode	Channel	Test Frequency (MHz)	Measurement PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
Mode 1	00	2402	-7.096	≤ 8	Pass
	19	2440	-6.197	≤ 8	Pass
	39	2480	-5.679	≤ 8	Pass


Mode 1 CH00(2402MHz)



Mode 1 CH20(2442MHz)

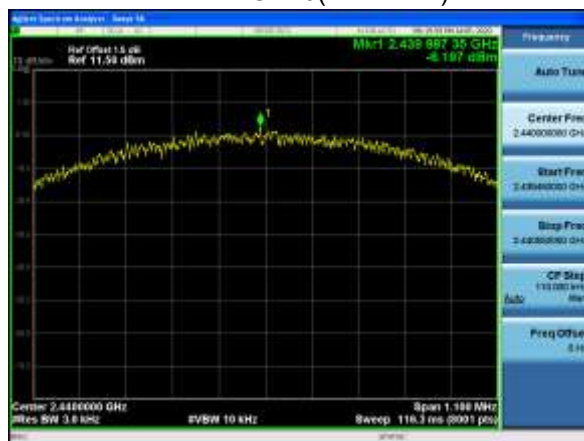

Mode 1 CH39(2480MHz)

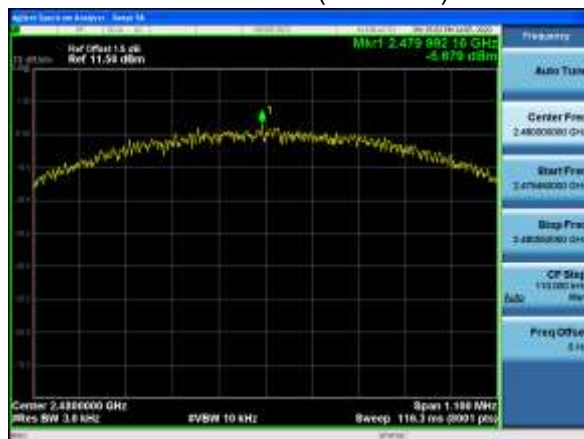

4.9 Antenna Requirement**VERDICT: PASS****4.9.1 Limit:****Standard**

FCC Part 15 Subpart C Paragraph 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

4.9.2 Antenna Connector Construction:

- | | |
|-------------------------------------|--|
| ☒ | The use of a permanently attached antenna |
| ☐ | The antenna use of a unique coupling to the intentional radiator |
| ☐ | The use of a nonstandard antenna jack or electrical connector |

Please refer to the attached document "Internal Photograph" to show the antenna connector.

4.10 Test setup photo and EUT Photo	VERDICT: PASS
--	----------------------

Remark: The test setup photo and EUT Photo please see appendix.

_____ The End _____