



**FCC CFR47 PART 15 SUBPART C  
CERTIFICATION  
TEST REPORT**

**FOR**

**WIRELESS NETWORKING ADAPTER**

**MODEL NUMBER: XBOX 360 WIRELESS NETWORKING ADAPTER**

**FCCID: C3K-WKS168**

**REPORT NUMBER: 05U3581-1**

**ISSUE DATE: AUGUST 16, 2005**

*Prepared for*  
**MICROSOFT CORPORATION**  
**ONE MICROSOFT WAY**  
**REDMOND, WA 98052-3699**  
**U.S.A.**

*Prepared by*  
**COMPLIANCE ENGINEERING SERVICES, INC.**  
**d.b.a.**  
**COMPLIANCE CERTIFICATION SERVICES**  
**561F MONTEREY ROAD,**  
**MORGAN HILL, CA 95037, USA**  
**TEL: (408) 463-0885**  
**FAX: (408) 463-0888**

**NVLAP**<sup>®</sup>  
LAB CODE:200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
A		Initial Issue	YZ
A.1	<u>07/20</u>	<ul style="list-style-type: none"><li>• Additional antenna gain info in section 5.3</li><li>• Confirm FCC ID number , Model Name and Product Description</li><li>• Added software setting in section 7.1.5 and 7.2.5 average output power</li><li>• Disclose internal antenna info in section 5.3</li></ul>	MK
A.2	<u>07/21</u>		MK
A.3	<u>8/16</u>	Corrected antenna gain in MPE table	<u>DG</u>

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS.....</b>	<b>5</b>
<b>2. TEST METHODOLOGY .....</b>	<b>6</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>6</b>
<b>4. CALIBRATION AND UNCERTAINTY.....</b>	<b>6</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION.....</i>	6
4.2. <i>MEASUREMENT UNCERTAINTY.....</i>	6
<b>5. EQUIPMENT UNDER TEST.....</b>	<b>7</b>
5.1. <i>DESCRIPTION OF EUT .....</i>	7
5.2. <i>MAXIMUM OUTPUT POWER .....</i>	7
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS.....</i>	7
5.4. <i>SOFTWARE AND FIRMWARE .....</i>	8
5.5. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	8
5.6. <i>DESCRIPTION OF TEST SETUP .....</i>	9
<b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>11</b>
<b>7. LIMITS AND RESULTS .....</b>	<b>12</b>
7.1. <i>CHANNEL TESTS FOR THE 2400 TO 2483.5 MHz BAND .....</i>	12
7.1.1. 6 dB BANDWIDTH .....	12
7.1.2. 99% BANDWIDTH.....	19
7.1.3. PEAK OUTPUT POWER .....	26
7.1.4. MAXIMUM PERMISSIBLE EXPOSURE.....	34
7.1.5. AVERAGE POWER.....	37
7.1.6. PEAK POWER SPECTRAL DENSITY .....	38
7.1.7. CONDUCTED SPURIOUS EMISSIONS.....	45
7.2. <i>CHANNEL TESTS FOR THE 5725 TO 5850 MHz BAND .....</i>	58
7.2.1. 6 dB BANDWIDTH .....	58
7.2.2. 99% BANDWIDTH.....	62
7.2.3. PEAK OUTPUT POWER .....	66
7.2.4. MAXIMUM PERMISSIBLE EXPOSURE.....	71
7.2.5. AVERAGE POWER.....	74
7.2.6. PEAK POWER SPECTRAL DENSITY .....	75
7.2.7. CONDUCTED SPURIOUS EMISSIONS.....	79
7.3. <i>RADIATED EMISSIONS.....</i>	86
7.3.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS .....	86
7.3.2. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND .....	89
7.3.3. TRANSMITTER ABOVE 1 GHz FOR 5725 TO 5850 MHz BAND .....	107
7.3.4. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz .....	108

7.4. POWERLINE CONDUCTED EMISSIONS .....	112
<b>8. SETUP PHOTOS .....</b>	<b>116</b>

## 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** MICROSOFT CORPORATION  
ONE MICROSOFT WAY  
REDMOND, WA 98052-6399

**EUT DESCRIPTION:** Wireless Network Adapter

**MODEL:** Xbox 360 Wireless Network Adapter

**SERIAL NUMBER:** 000D3A7ADE40

**DATE TESTED:** JULY 09-12, 2005

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:



---

YANG ZHENG  
EMC SUPERVISOR  
COMPLIANCE CERTIFICATION SERVICES

Tested By:



---

DAVID GARCIA  
EMC ENGINEER  
COMPLIANCE CERTIFICATION SERVICES

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

EUT is a USB 2.0 to Wireless Adapter to connect the Microsoft gaming console wirelessly to the internet or home network. This allows users to utilize their existing home 802.11a, 802.11b or 802.11g wireless network, managed by a wireless Access Point. It also can operate in a peer to peer mode with another wireless enabled gaming console.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

2400 to 2483.5 MHz Authorized Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412 - 2462	802.11b	18.50	70.79
2412 - 2462	802.11g	21.13	129.72

5725 to 5850 MHz Authorized Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5745 - 5825	802.11a	22.74	187.93

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio is equipped with two antennas. One is external Omni-directional antenna with IPEX MHF connector for TX/RX diversity. The other antenna is internal PIFA PCB antenna. Internal antenna is disabled by firmware at factory.

The peak antenna gains in various bands for external Omni-directional antenna are:

Frequency ( MHz )	Peak Gain in dBi (with console)
2400	4.1
2450	3.8
2500	2.9
4900	2.6
5000	3.0
5150	2.1
5250	2.6
5350	2.7
5750	3.0

## **5.4. SOFTWARE AND FIRMWARE**

The test utility software used during testing was DutApiClass, version 1.1.3.01

## **5.5. WORST-CASE CONFIGURATION AND MODE**

The worst-case channel is determined as the channel with the highest output power. The highest measured output power was at 5785MHz.for a mode.

The worst-case data rate for this channel is determined to be 6 Mb/s

## 5.6. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Toshiba	Tecra 8100	S Z0161557U	DoC
AC Adapter	NEC	ADP57	9701608DE	DoC


### I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	US 115V	Un-shielded	2m	No
2	DC	1	DC	Un-shielded	1m	No
3	USB	1	USB	Un-shielded	2m	Yes

### TEST SETUP

The EUT is connected to a host laptop computer via USB cable during the tests. Test software exercised the radio card.

**SETUP DIAGRAM FOR TESTS**

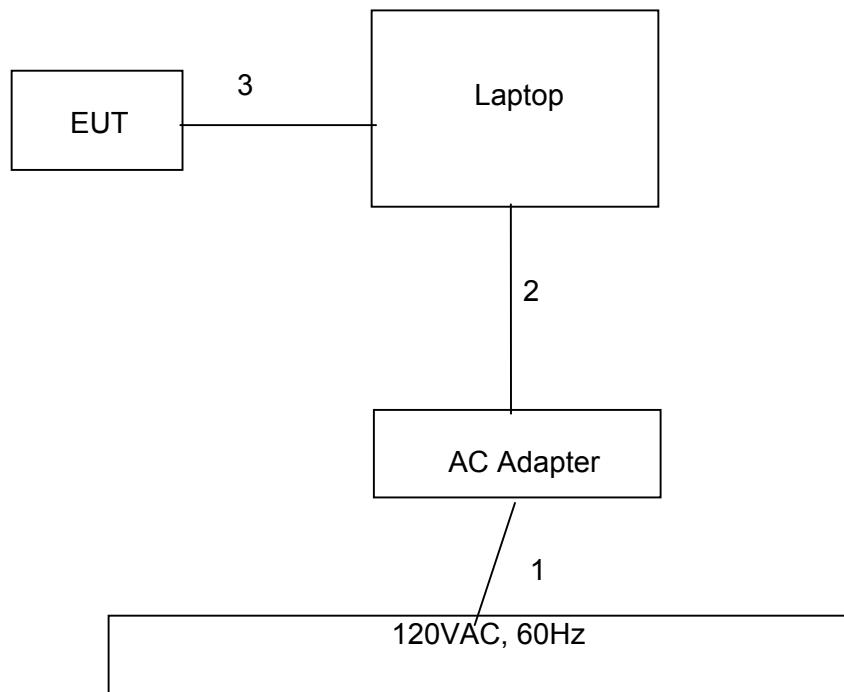

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
EMI Test Receiver	R & S	ESHS 20	827129/006	10/22/2005
Site A Line Stabilizer / Conditioner	Tripplite	LC-1800a	A0051681	CNR
LISN, 10 kHz ~ 30 MHz	FCC	LISN-50/250-25-2	2023	8/30/2005
LISN, 10 kHz ~ 30 MHz	Solar	8012-50-R-24-BNC	8379443	10/21/2005
Spectrum Analyzer	Agilent	E4446A	US42510266	8/25/2005
Antenna, Horn 1 ~ 18 GHz	EMCO	3117	29310	9/12/2005
Preamplifier, 1 ~ 26.5 GHz	HP	8449B	3008A00369	8/17/2005
Peak Power Meter	Agilent	E4416A	GB41291160	2/9/2006
Peak / Average Power Sensor	Agilent	E9327A	US40440755	2/10/2006
RF Filter Section	HP	85420E	3705A00256	3/6/2006
EMI Receiver, 9 kHz ~ 2.9 GHz	HP	8542E	3942A00286	3/6/2006
30MHz---- 2Ghz	Sunol Sciences	JB1 Antenna	A121003	38607
4.0 High Pass Filter	Micro Tronics	HPM13351	3	CNR
7.6GHz HPF	Micro Tronics	HPM13195	1	CNR
Antenna, Horn 18 ~ 26 GHz	ARA	MWH-1826/B	1049	38607
Antenna, Horn 26 ~ 40 GHz	ARA	MWH-2640/B	1029	38715
PreAmplifier 26-40 GHz	Miteq	NSP4000-SP2	924343	38877

## 7. LIMITS AND RESULTS

### 7.1. CHANNEL TESTS FOR THE 2400 TO 2483.5 MHz BAND

#### 7.1.1. 6 dB BANDWIDTH

##### LIMIT

§15.247 (a) (2) For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

##### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

##### RESULTS

No non-compliance noted:


802.11b Mode


Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2412	9417	500	8917
Middle	2437	9500	500	9000
High	2462	9500	500	9000


802.11g Mode

Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2412	16500	500	16000
Middle	2437	16500	500	16000
High	2462	16500	500	16000


**6 DB BANDWIDTH (802.11b MODE)**

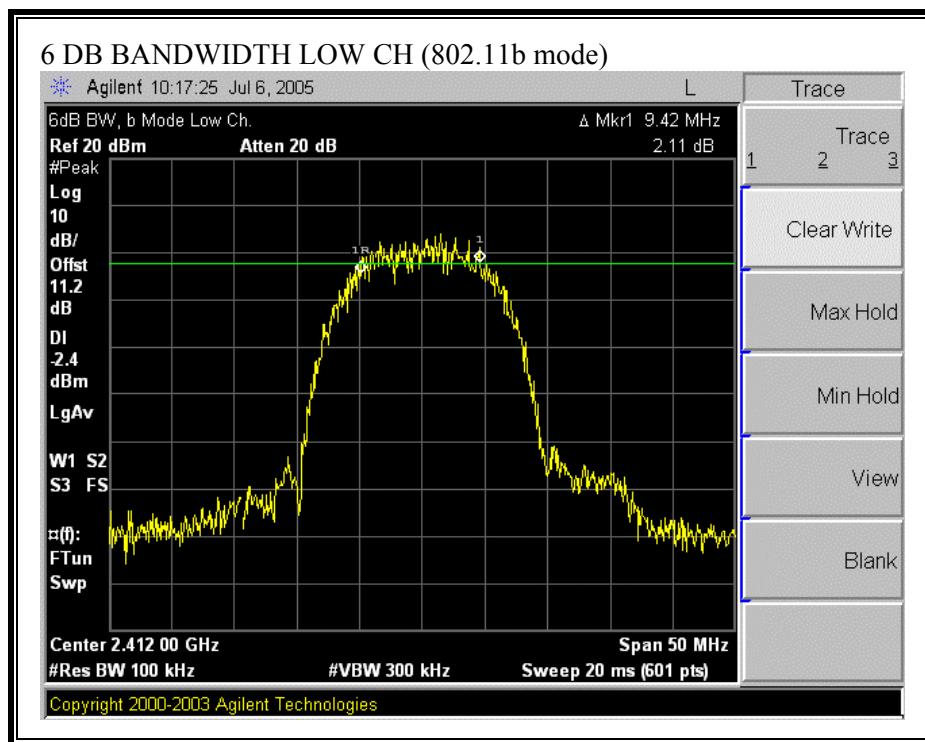


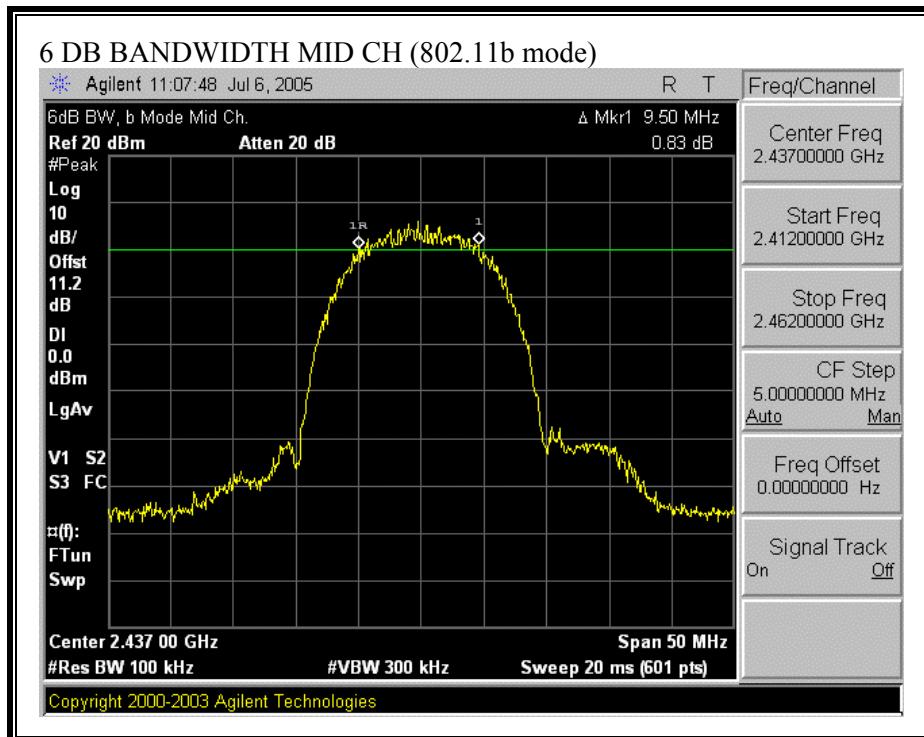


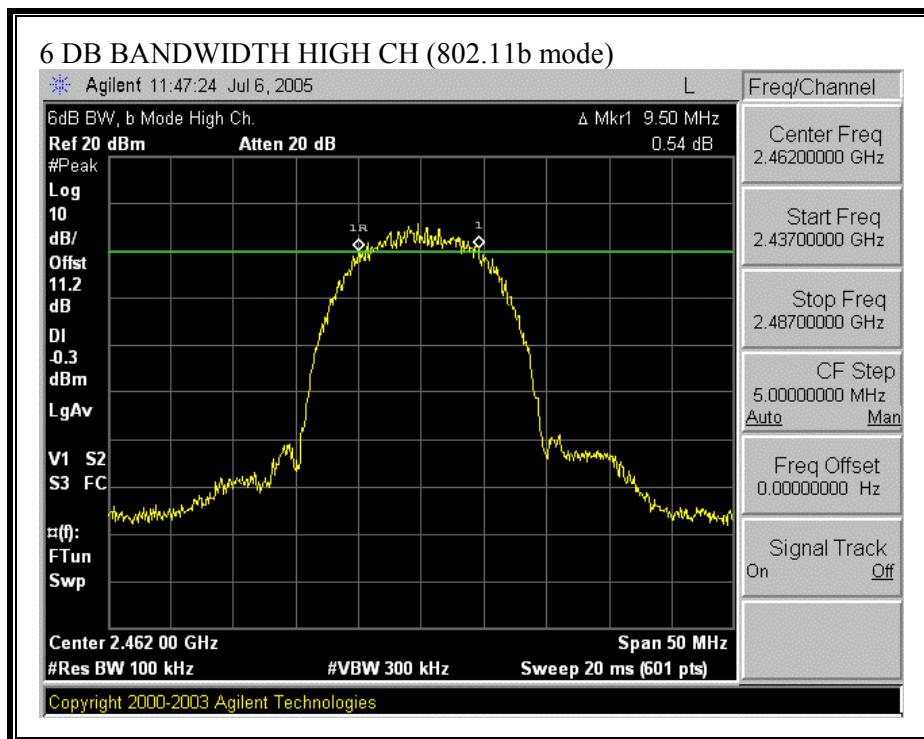

**6 DB BANDWIDTH (802.11g MODE)**

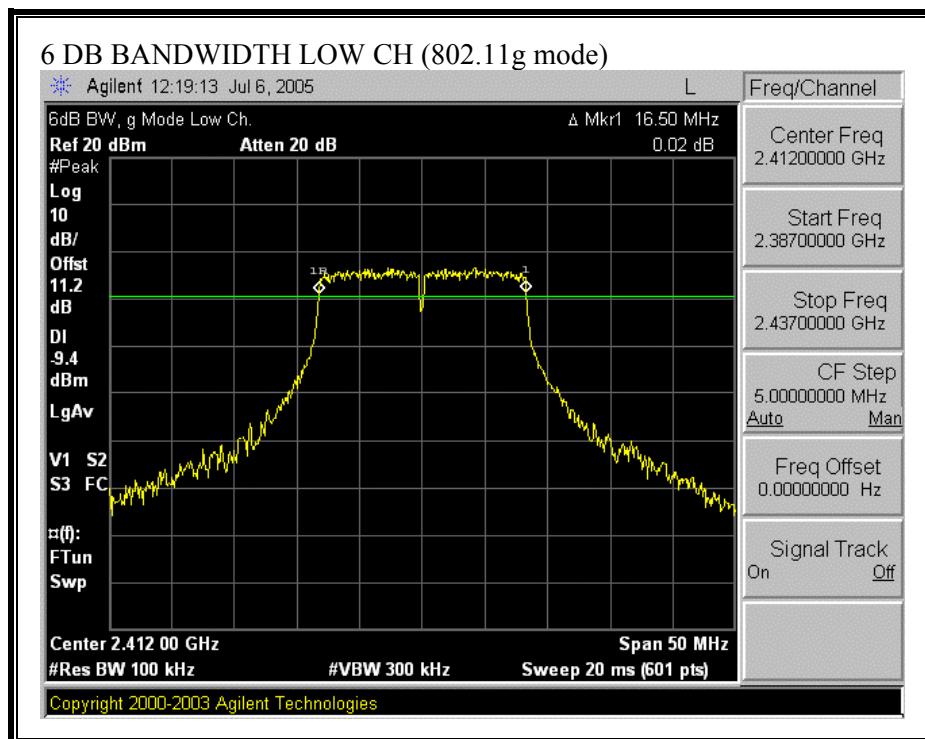

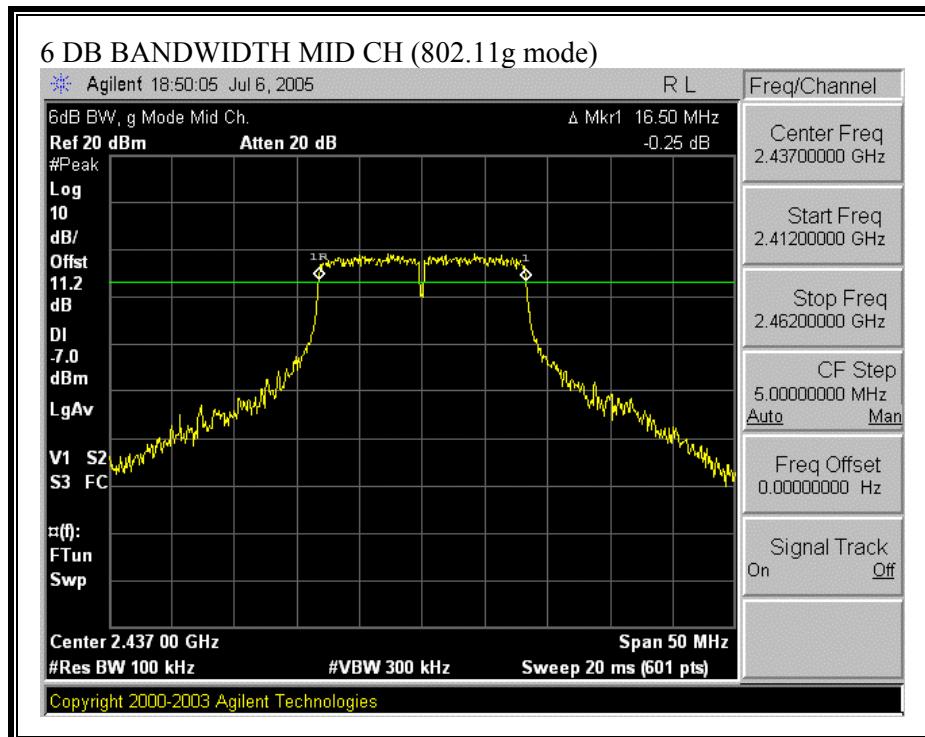

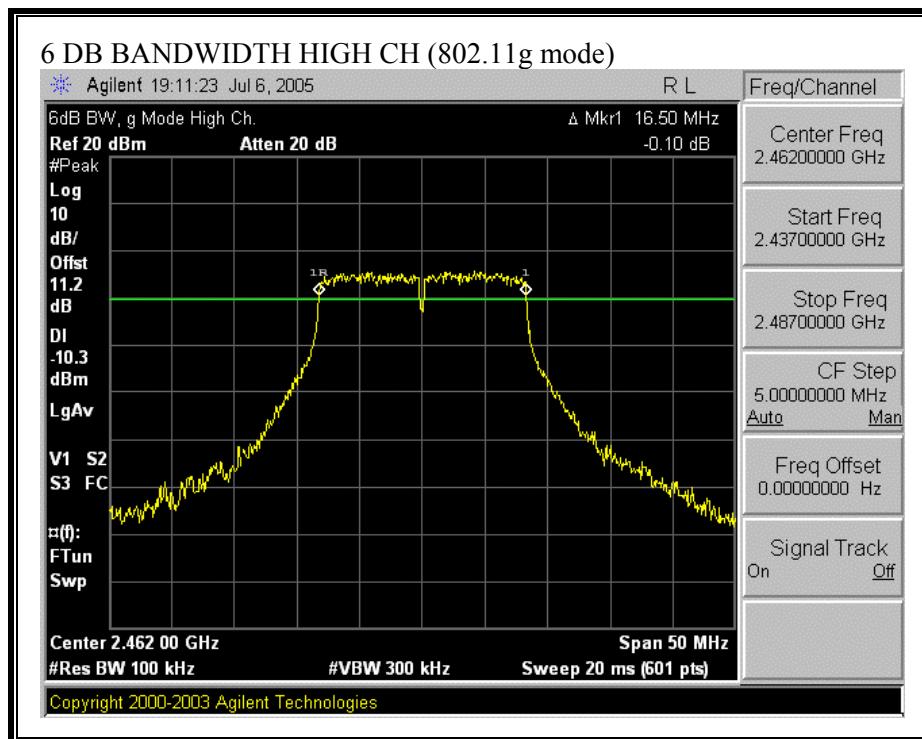

### 7.1.2. 99% BANDWIDTH

#### LIMIT

None; for reporting purposes only.

#### TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

#### RESULTS

No non-compliance noted:


802.11b Mode


Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	13.488
Middle	2437	13.498
High	2462	13.487


802.11g Mode

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	16.572
Middle	2437	16.658
High	2462	16.642


**99% BANDWIDTH (802.11b MODE)**

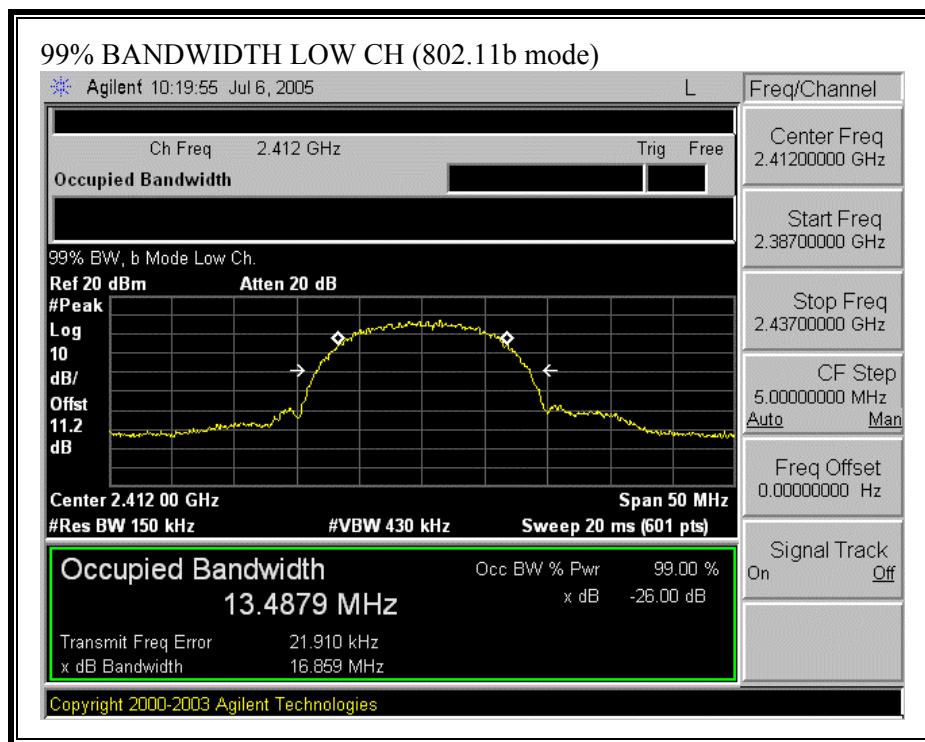


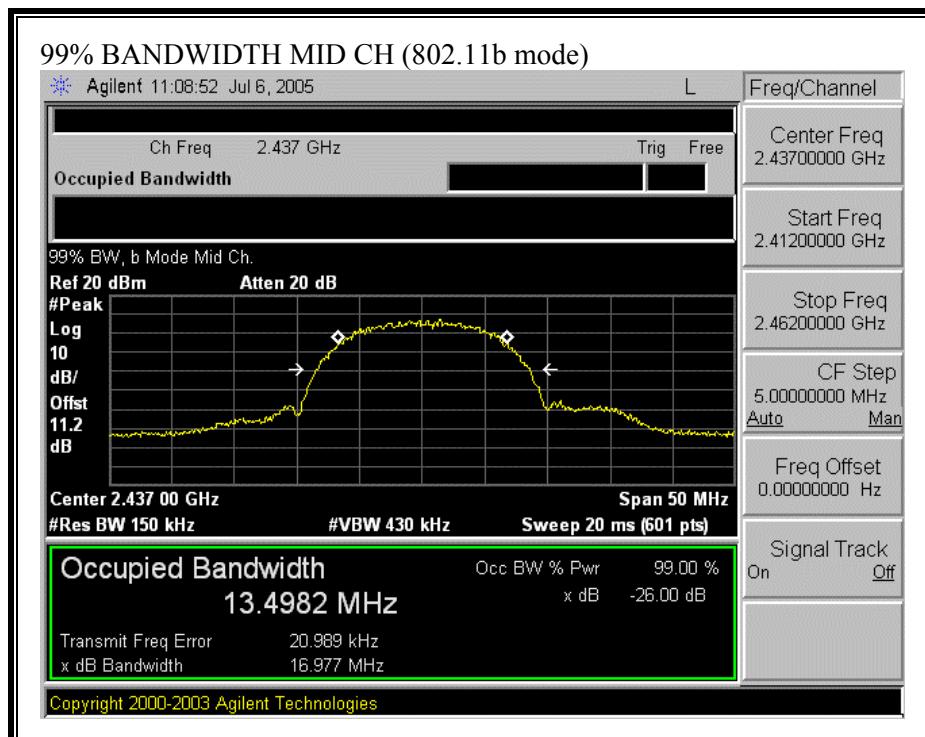


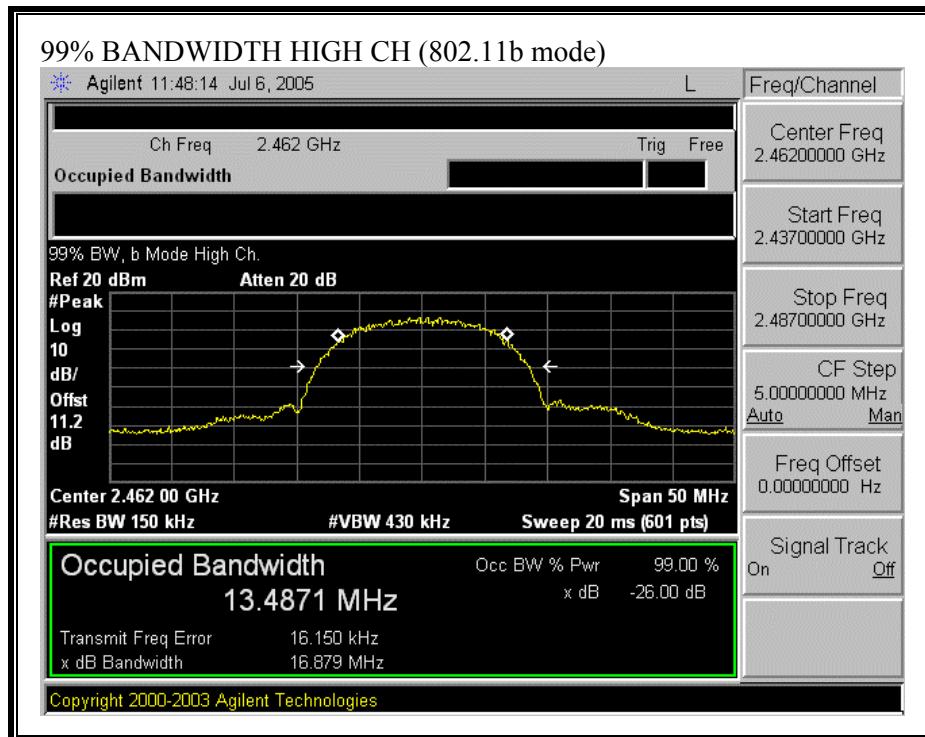

**99% BANDWIDTH (802.11g MODE)**

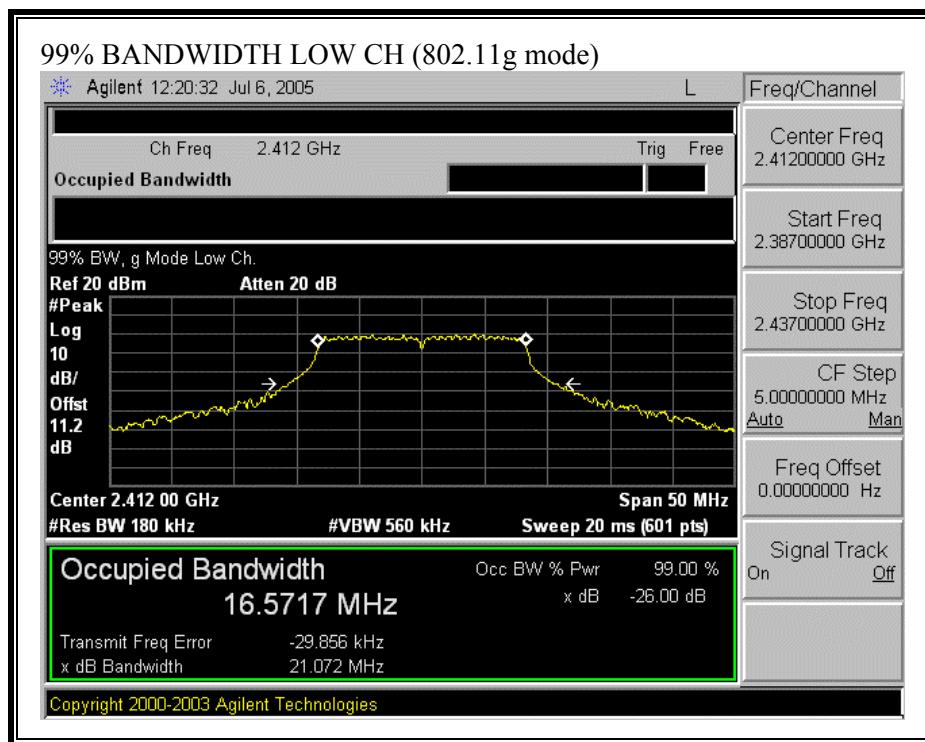

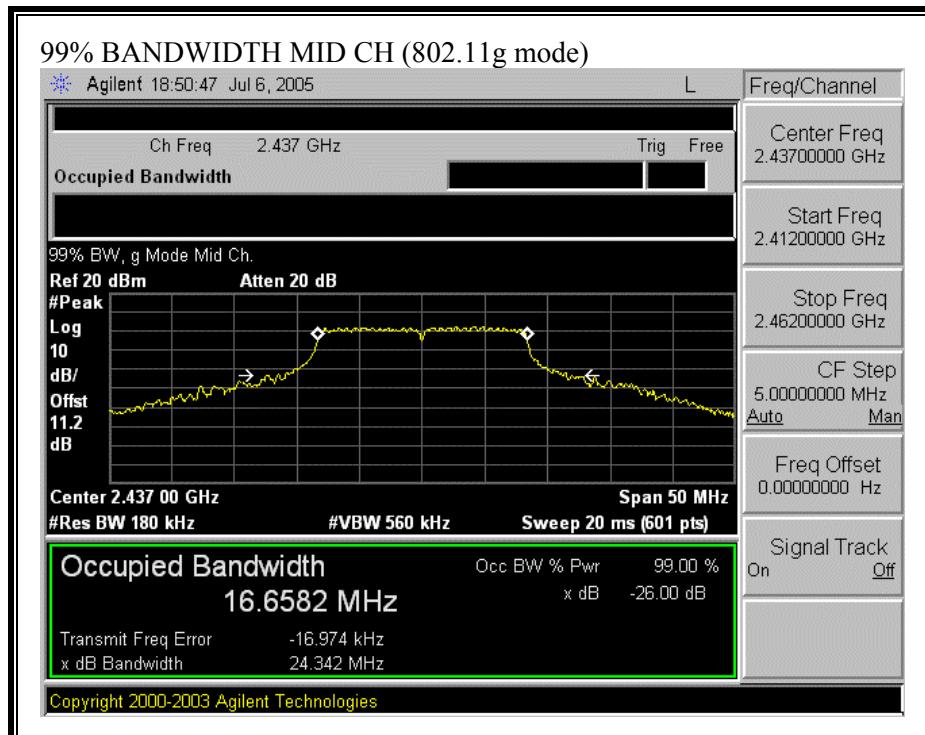

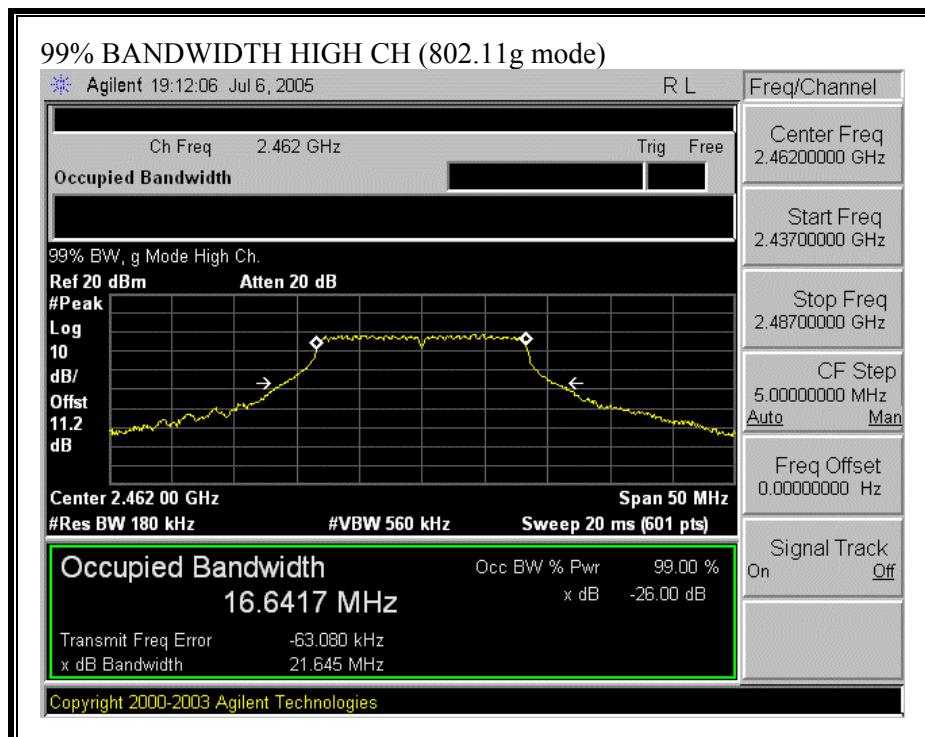

### 7.1.3. PEAK OUTPUT POWER

#### PEAK POWER LIMIT

§15.247 (b) The maximum peak output power of the intentional radiator shall not exceed the following:

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 watt.

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

§15.247 (b) (4) (i) Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth.

## **RESULTS**

The maximum antenna gain is less than 6.0 dBi for other than fixed, point-to-point operations, therefore the limit is 30 dBm.

No non-compliance noted:


### 802.11b Mode


Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	18.02	30	-11.98
Middle	2437	18.50	30	-11.50
High	2462	17.87	30	-12.13


### 802.11g Mode

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	18.31	30	-11.69
Middle	2437	21.13	30	-8.87
High	2462	17.52	30	-12.48


**OUTPUT POWER (802.11b MODE)**

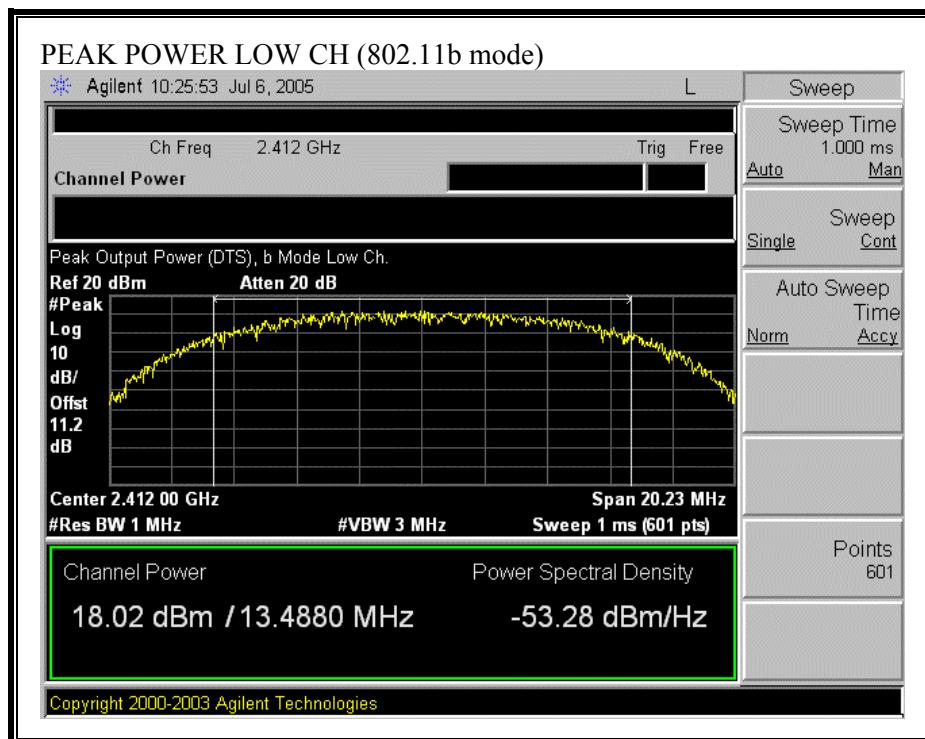


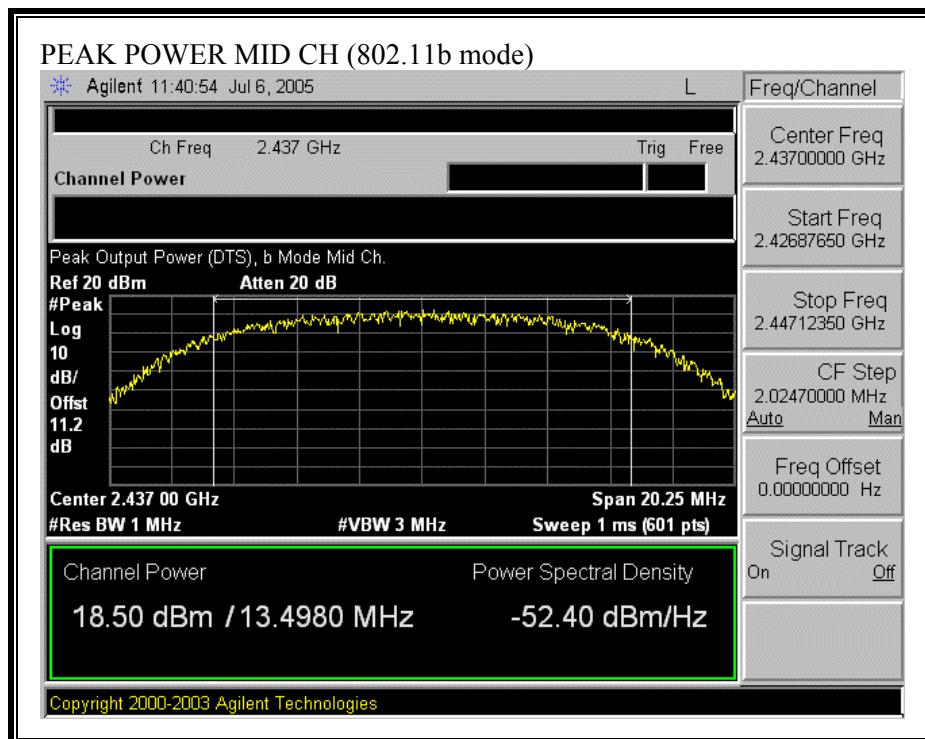


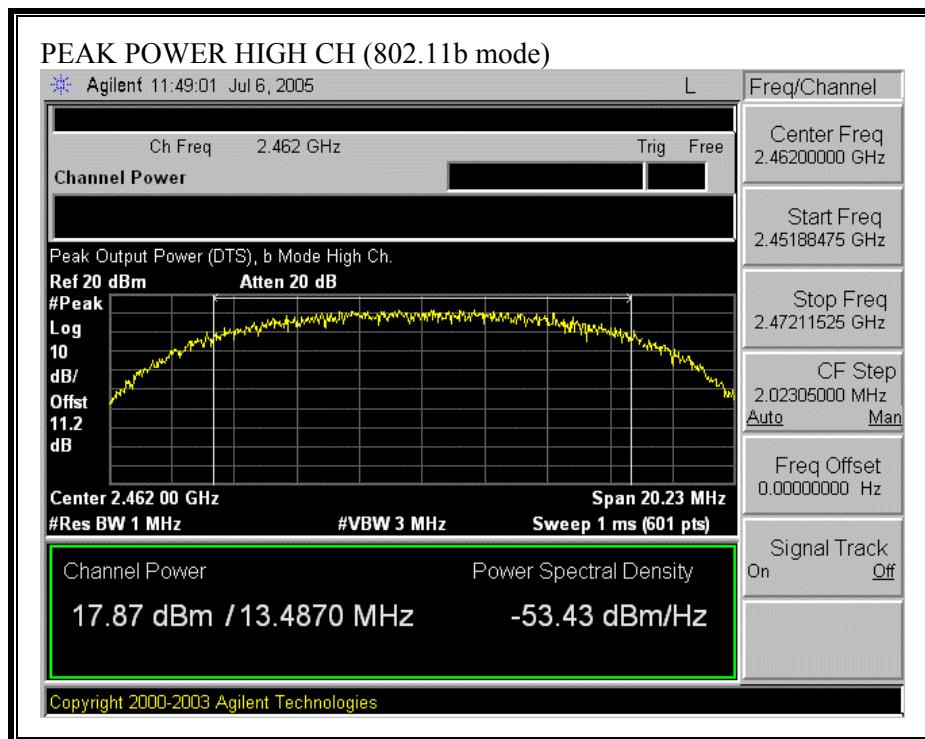

**OUTPUT POWER (802.11g MODE)**

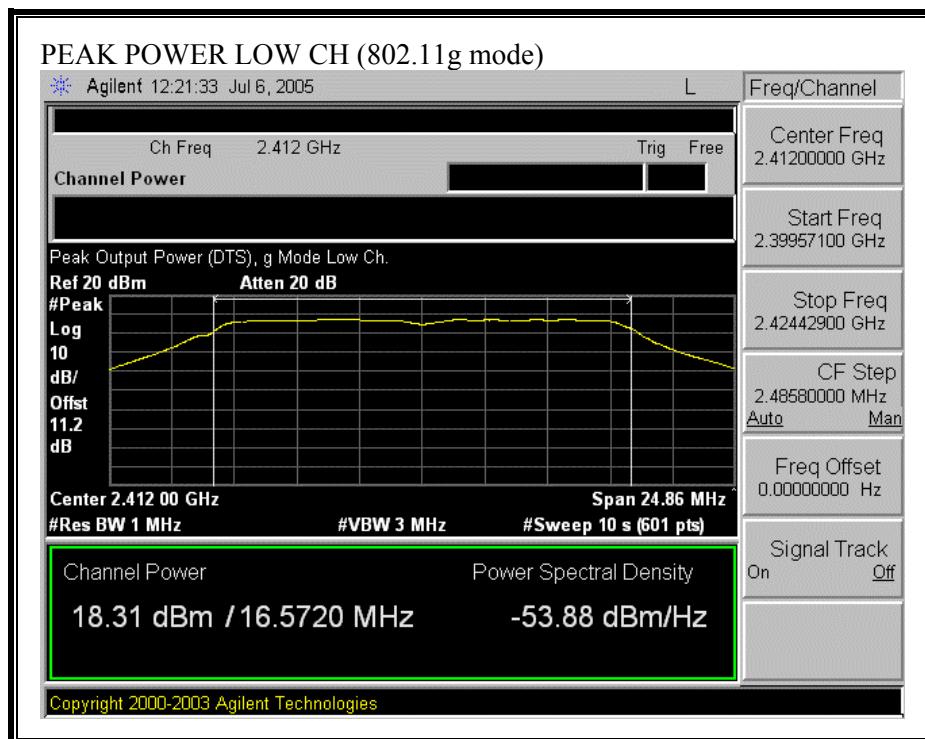

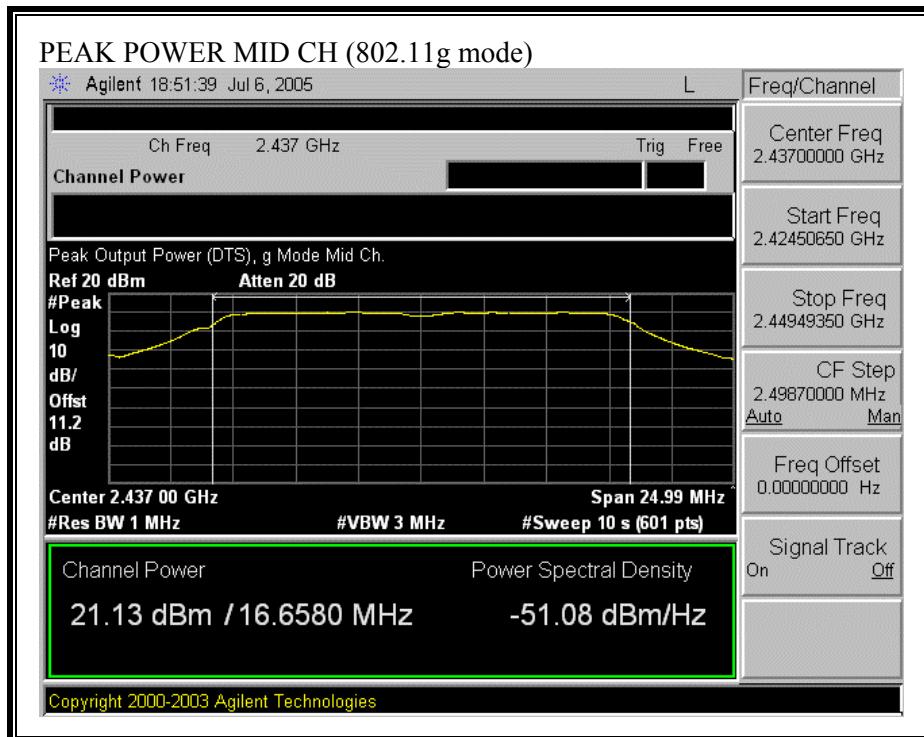

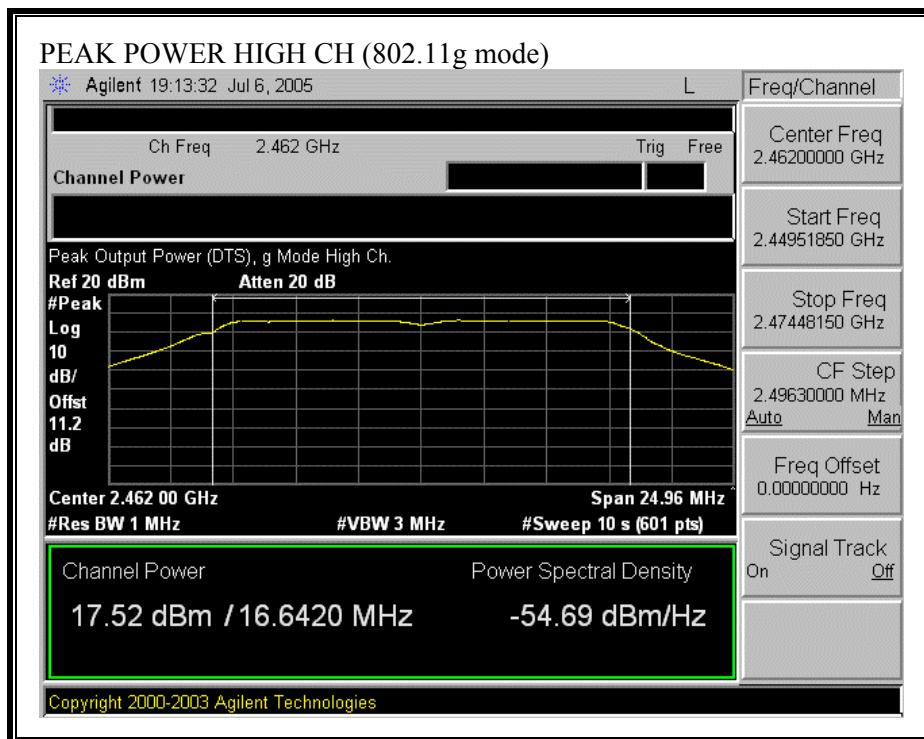

### 7.1.4. MAXIMUM PERMISSIBLE EXPOSURE

#### LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0 .....	614	1.63	*(100)	6
3.0–30 .....	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30–300 .....	61.4	0.163	1.0	6
300–1500 .....	.....	.....	f/300	6
1500–100,000 .....	.....	.....	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34 .....	614	1.63	*(100)	30
1.34–30 .....	824/f	2.19/f	*(180/f <sup>2</sup> )	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
30–300 .....	27.5	0.073	0.2	30
300–1500 .....	.....	.....	f/1500	30
1500–100,000 .....	.....	.....	1.0	30

f = frequency in MHz

\* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

## **CALCULATIONS**

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations and rearranging the terms to express the distance as a function of the remaining variables yields:

$$d = \sqrt{((30 * P * G) / (3770 * S))}$$

Changing to units of Power to mW and Distance to cm, using:

$$P (\text{mW}) = P (\text{W}) / 1000 \text{ and}$$

$$d (\text{cm}) = 100 * d (\text{m})$$

yields

$$d = 100 * \sqrt{((30 * (P / 1000) * G) / (3770 * S))}$$

$$d = 0.282 * \sqrt{(P * G / S)}$$

where

d = distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power Density in mW/cm<sup>2</sup>

Substituting the logarithmic form of power and gain using:

$$P (\text{mW}) = 10^{(P (\text{dBm}) / 10)} \text{ and}$$

$$G (\text{numeric}) = 10^{(G (\text{dBi}) / 10)}$$

yields

$$d = 0.282 * 10^{((P + G) / 20)} / \sqrt{S}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm<sup>2</sup>

Rearranging terms to calculate the power density at a specific distance yields

$$S = 0.0795 * 10^{((P + G) / 10)} / (d^2) \quad \text{Equation (1)}$$

**LIMITS**

From §1.1310 Table 1 (B), the maximum S = 1.0 mW/cm<sup>2</sup>

**RESULTS**

No non-compliance noted:

Mode	MPE Distance (cm)	Output Power (dBm)	Antenna Gain (dBi)	Power Density (mW/cm <sup>2</sup> )
802.11b	20.0	18.50	4.10	0.04
802.11g	20.0	21.13	4.10	0.07

NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.

### 7.1.5. AVERAGE POWER

#### AVERAGE POWER LIMIT

None; for reporting purposes only.

#### TEST PROCEDURE

The transmitter output is connected to a power meter.

#### RESULTS

No non-compliance noted:

The cable assembly insertion loss of 11.18 dB (including 10 dB pad and 1.18 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

MODE / CHANNEL	TARGET AVERAGE POWER (dBm)	MEASURED AVERAGE POWER (dBm)	TEST UTILITY S/W SETTINGS
b mode 2412	16	16.17	16
b mode 2437	17	16.7	17
b mode 2462	16	16.1	16
g mode 2412	11	11.6	11
g mode 2437	16	15.5	19
g mode 2462	11	11.2	10

### 7.1.6. PEAK POWER SPECTRAL DENSITY

#### LIMIT

§15.247 (d) For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer, the maximum level in a 3 kHz bandwidth is measured with the spectrum analyzer using RBW = 3 kHz and VBW > 3 kHz, sweep time = span / 3 kHz, and video averaging is turned off. The PPSD is the highest level found across the emission in any 3 kHz band.

#### RESULTS

No non-compliance noted:


##### 802.11b Mode


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-8.41	8	-16.41
Middle	2437	-8.38	8	-16.38
High	2462	-8.75	8	-16.75


##### 802.11g Mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-18.56	8	-26.56
Middle	2437	-15.53	8	-23.53
High	2462	-19.23	8	-27.23


**PEAK POWER SPECTRAL DENSITY (802.11b MODE)**

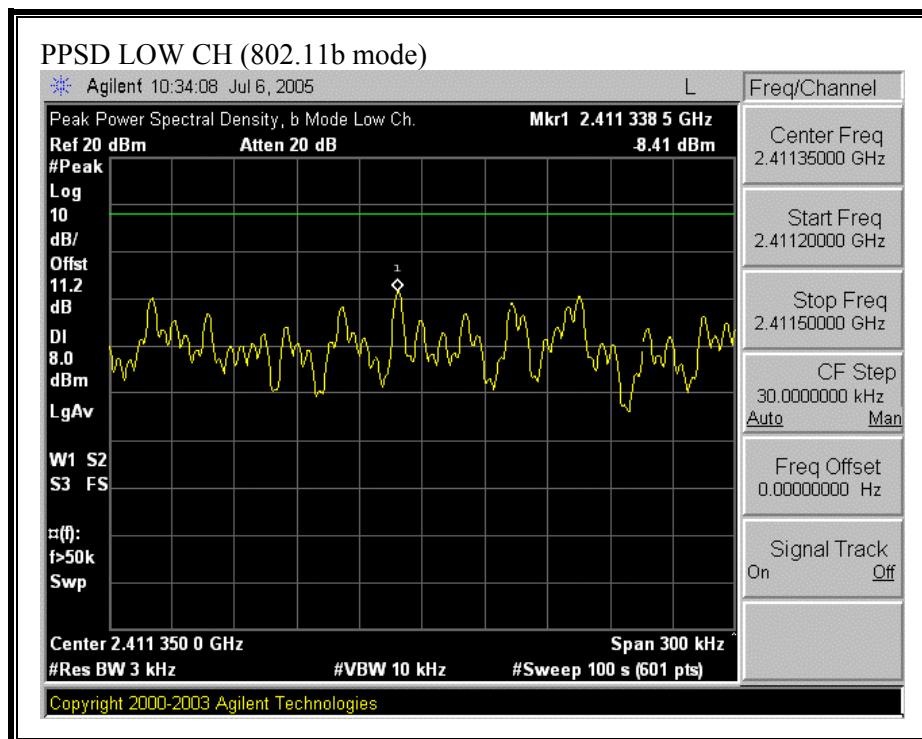


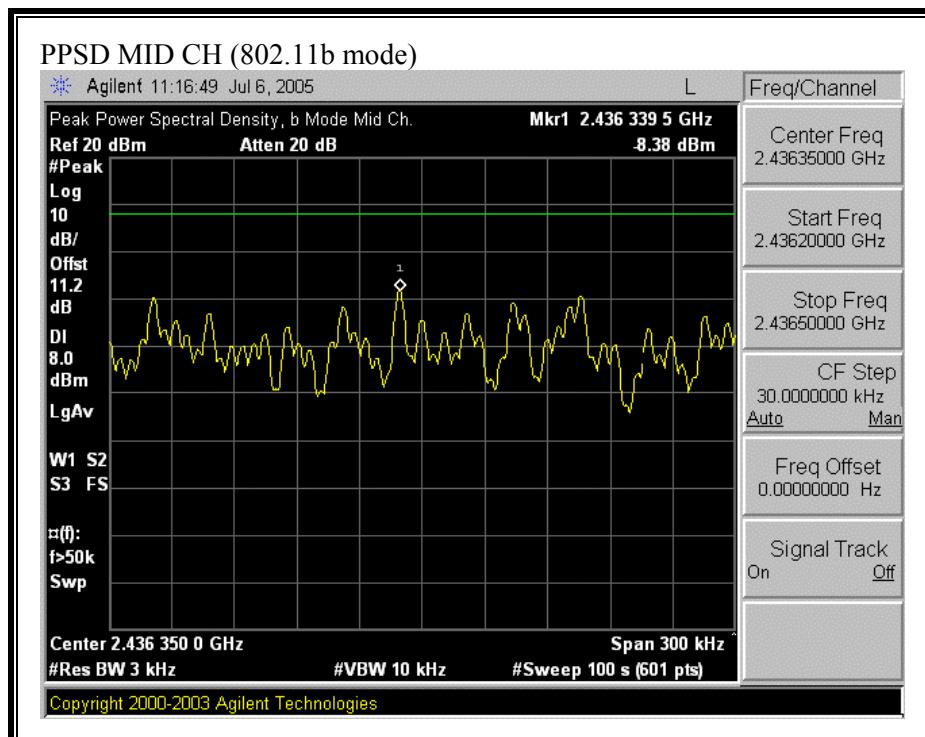


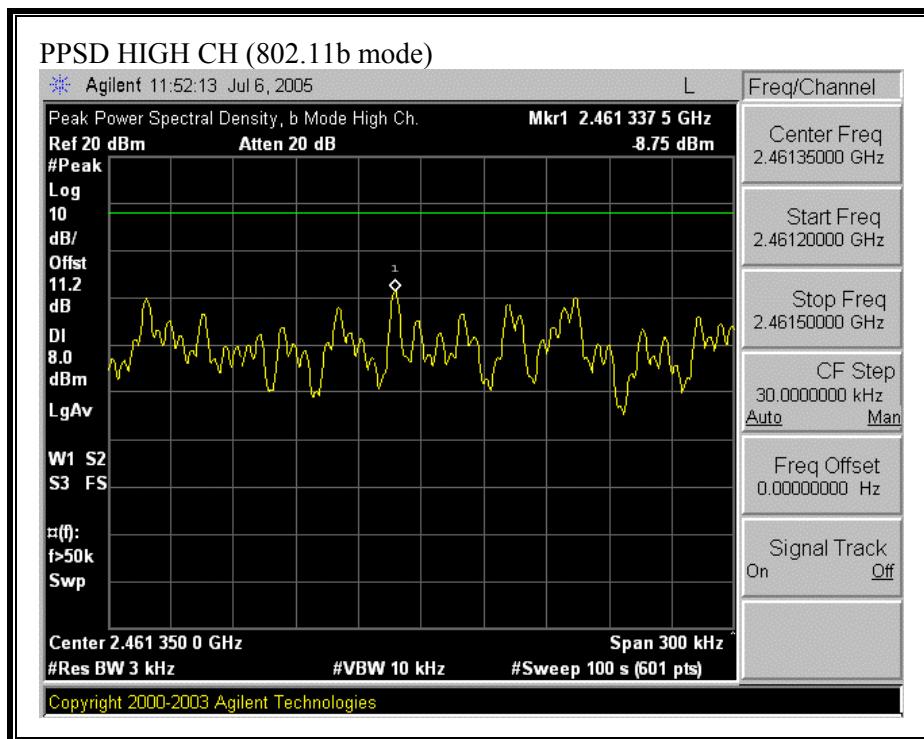

**PEAK POWER SPECTRAL DENSITY (802.11g MODE)**

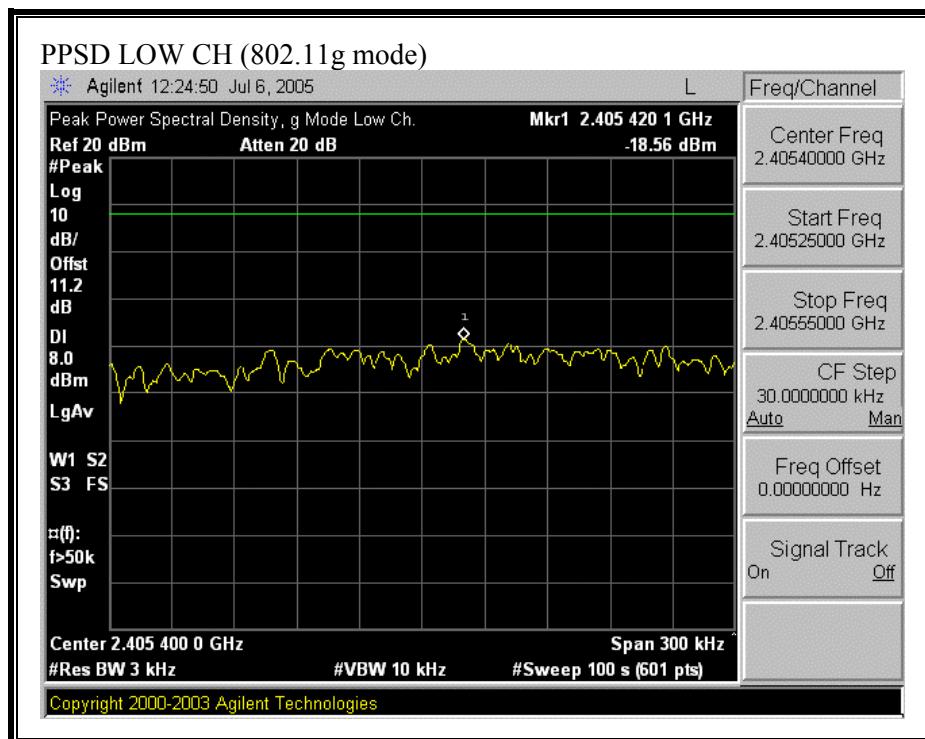

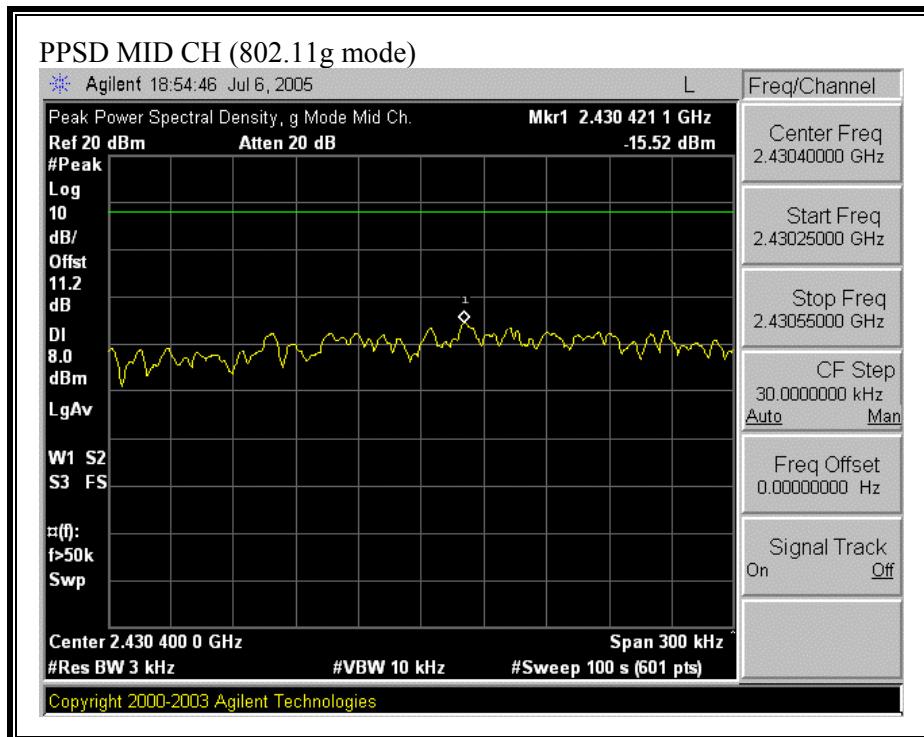

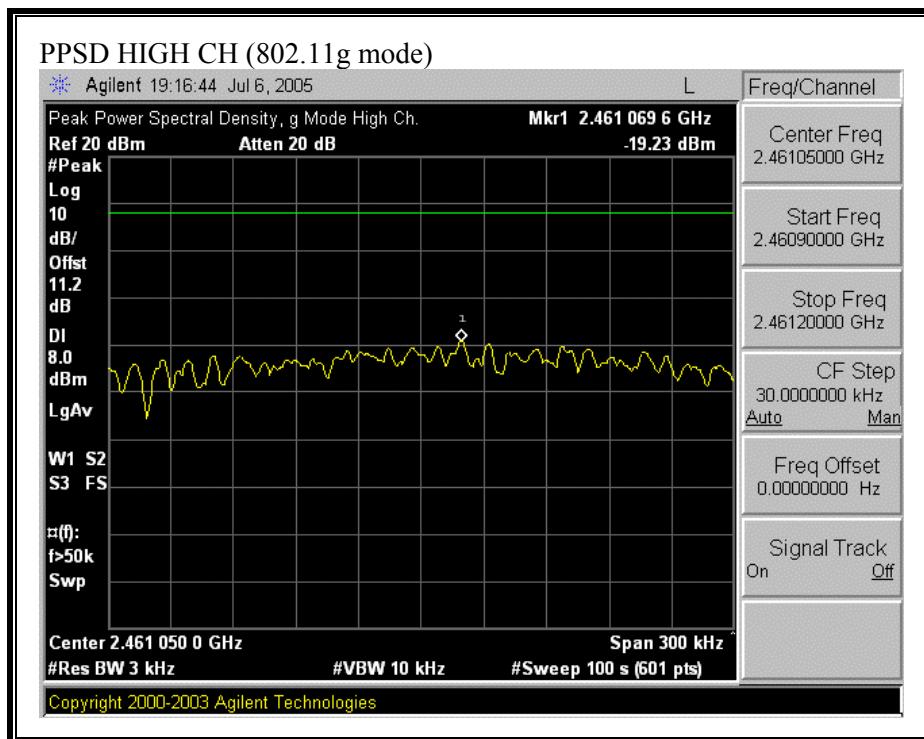

### 7.1.7. CONDUCTED SPURIOUS EMISSIONS

#### LIMITS

§15.247 (c) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

#### TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

#### RESULTS


No non-compliance noted:


**SPURIOUS EMISSIONS, LOW CHANNEL (802.11b MODE)**

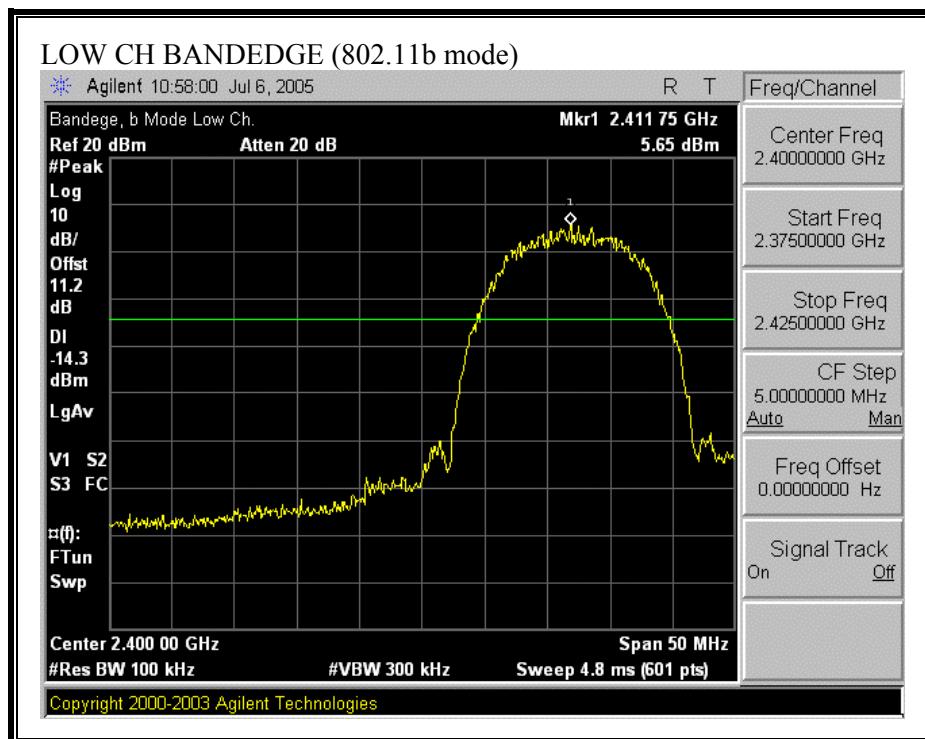

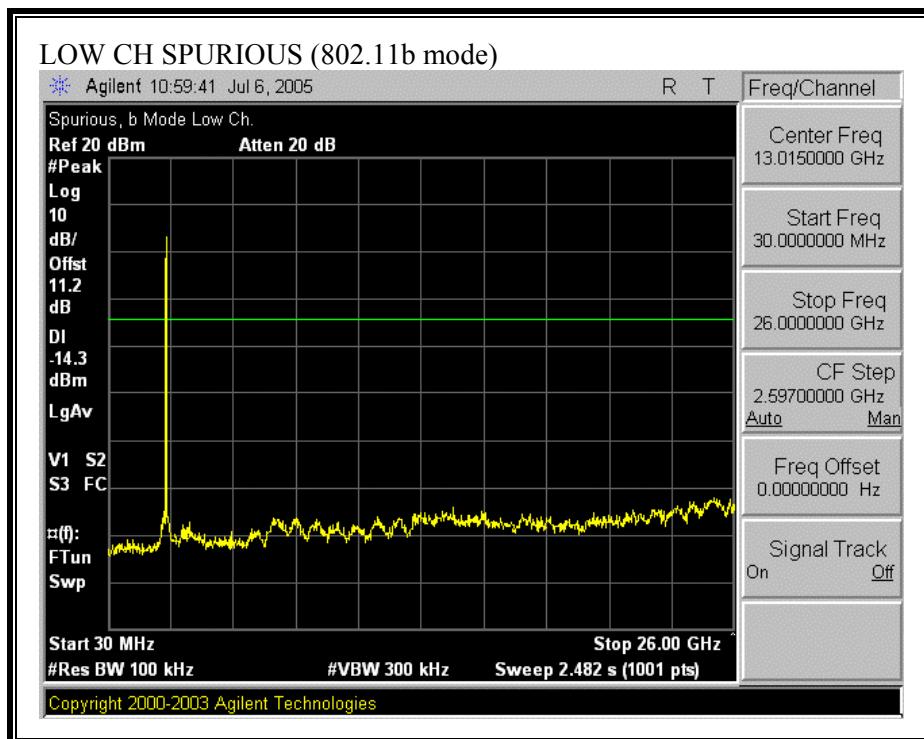



**SPURIOUS EMISSIONS, MID CHANNEL (802.11b MODE)**

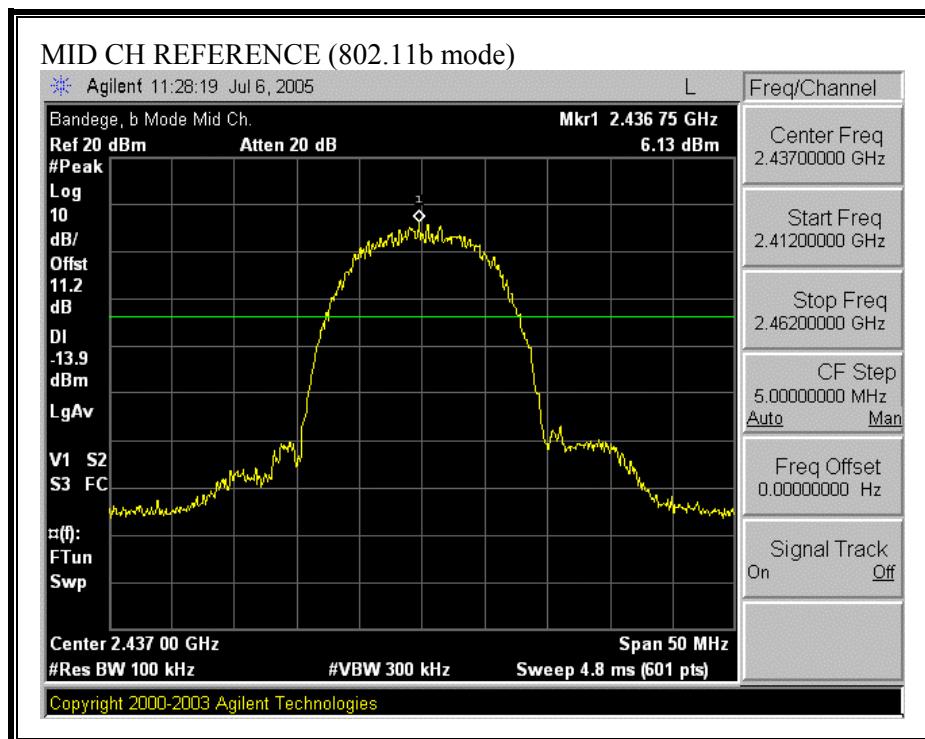

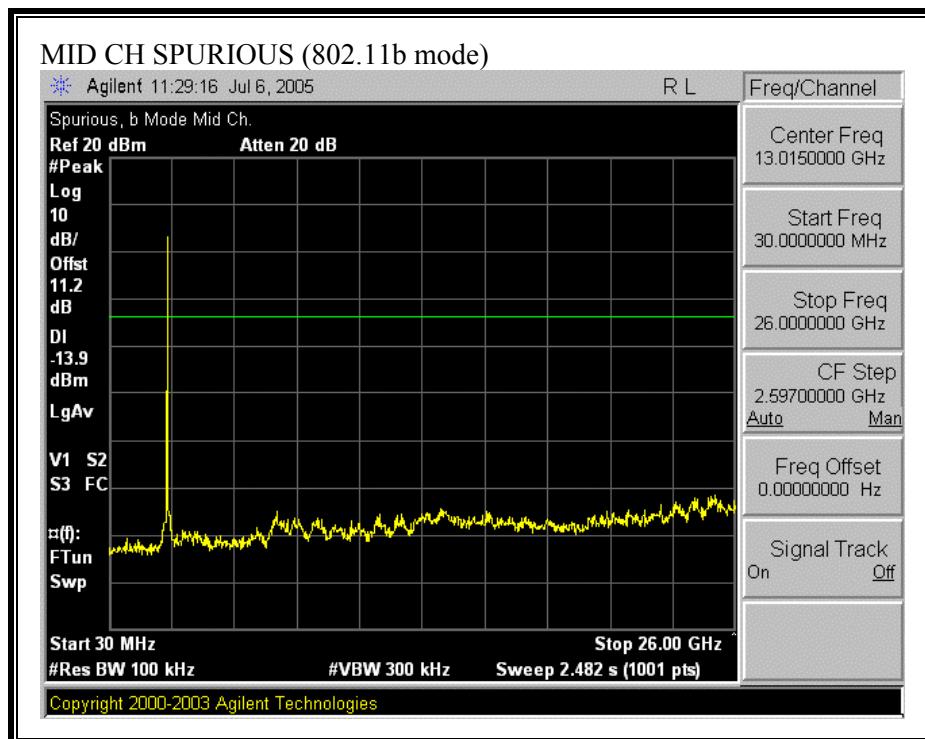



**SPURIOUS EMISSIONS, HIGH CHANNEL (802.11b MODE)**

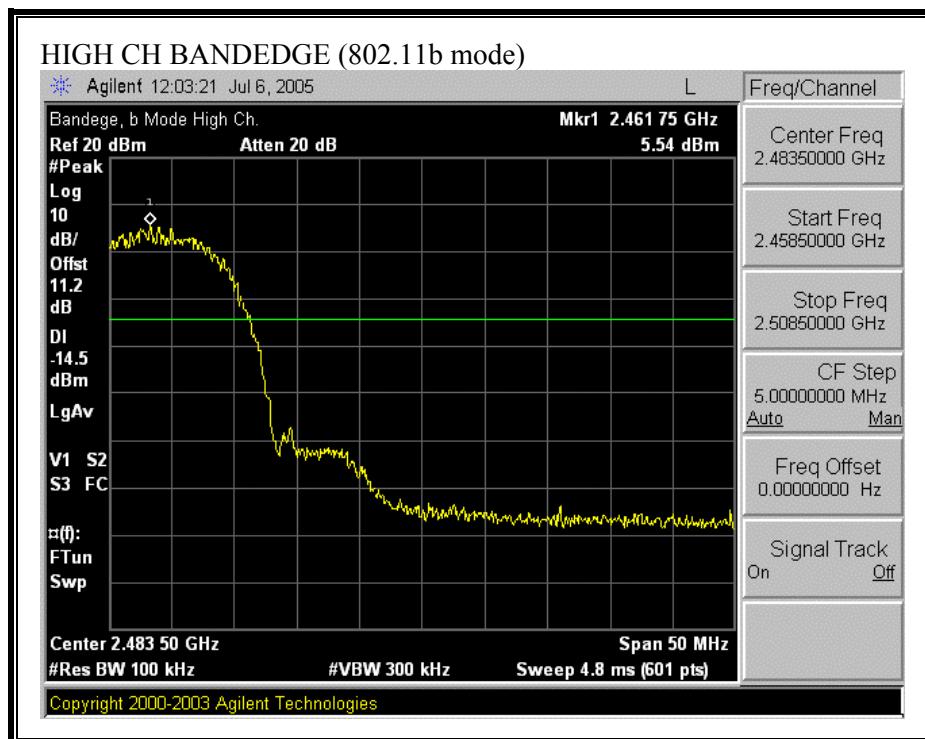

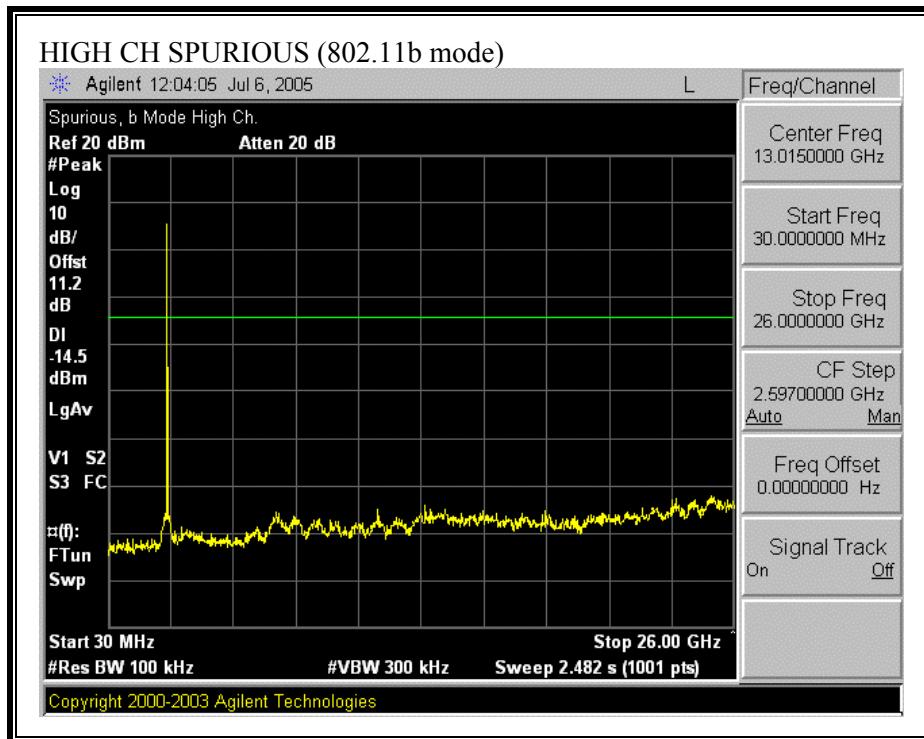



**SPURIOUS EMISSIONS, LOW CHANNEL (802.11g MODE)**

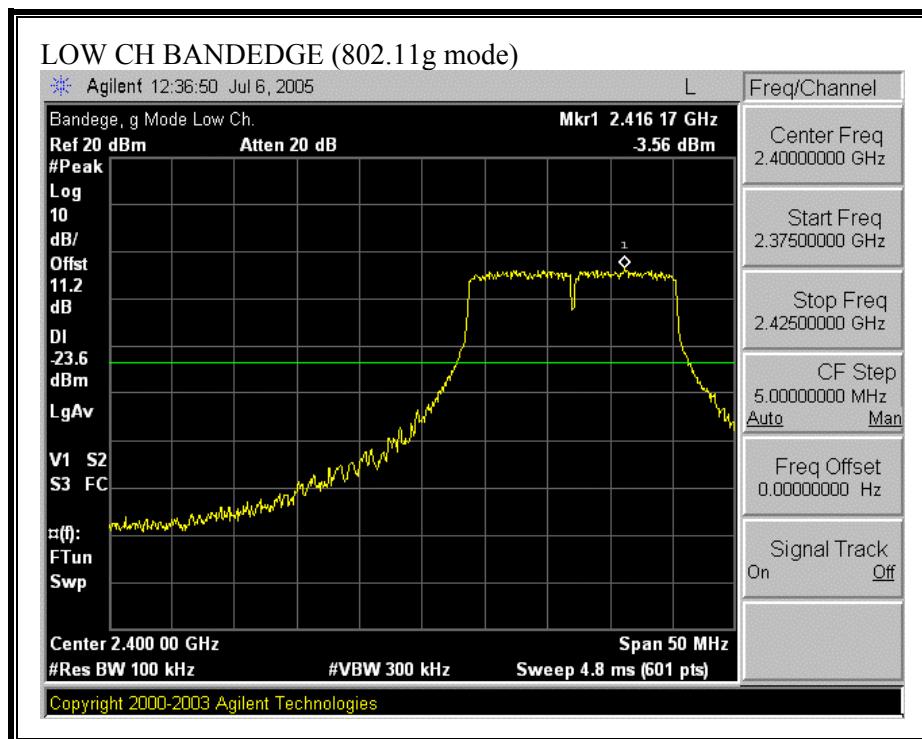

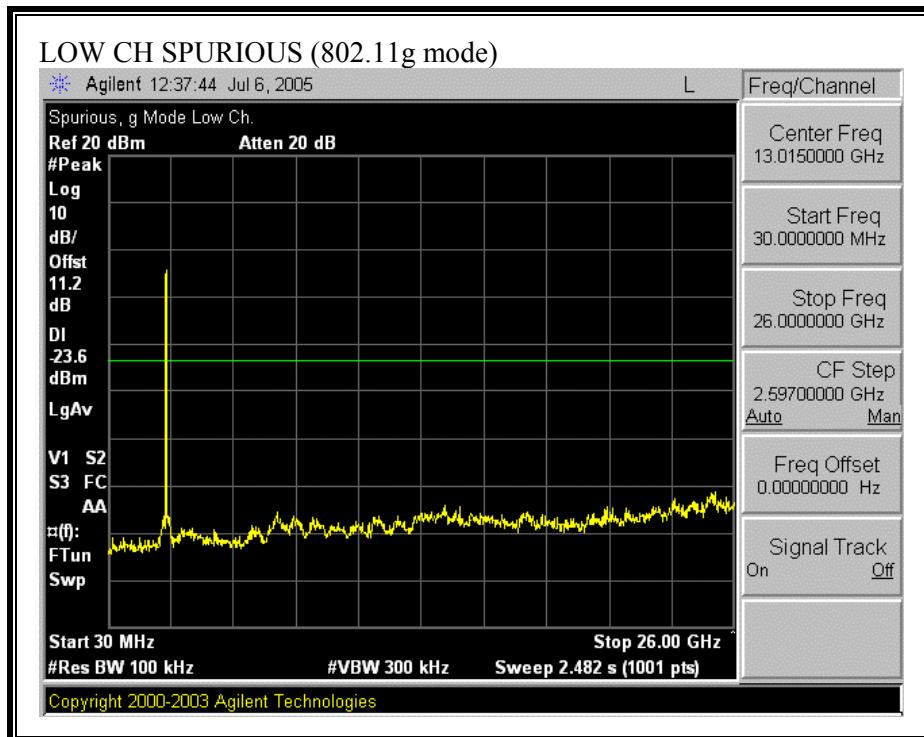



**SPURIOUS EMISSIONS, MID CHANNEL (802.11g MODE)**

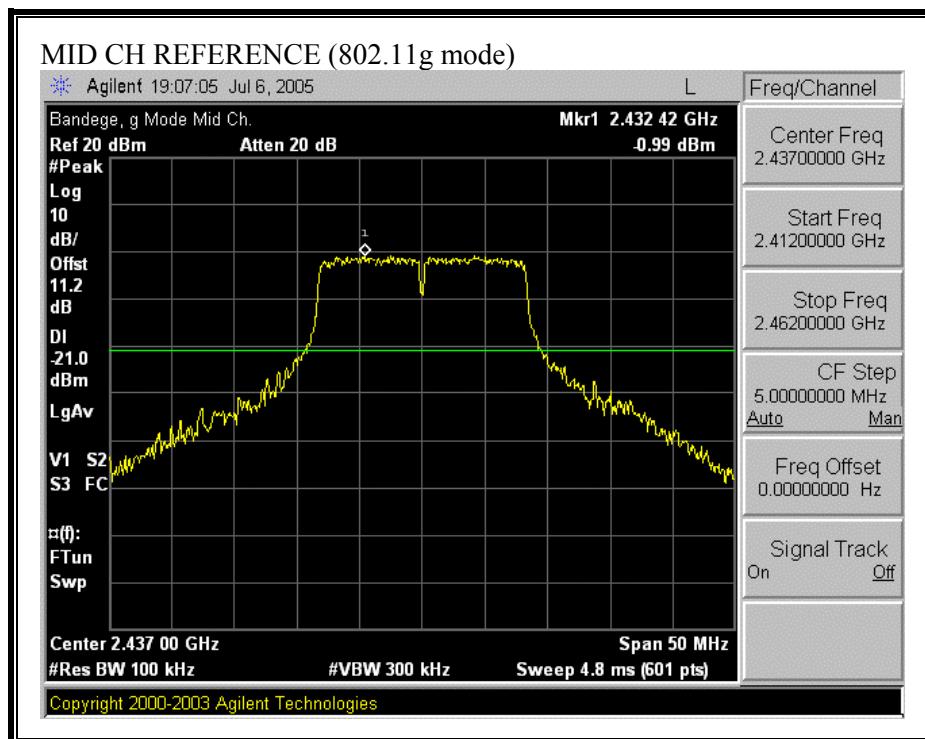

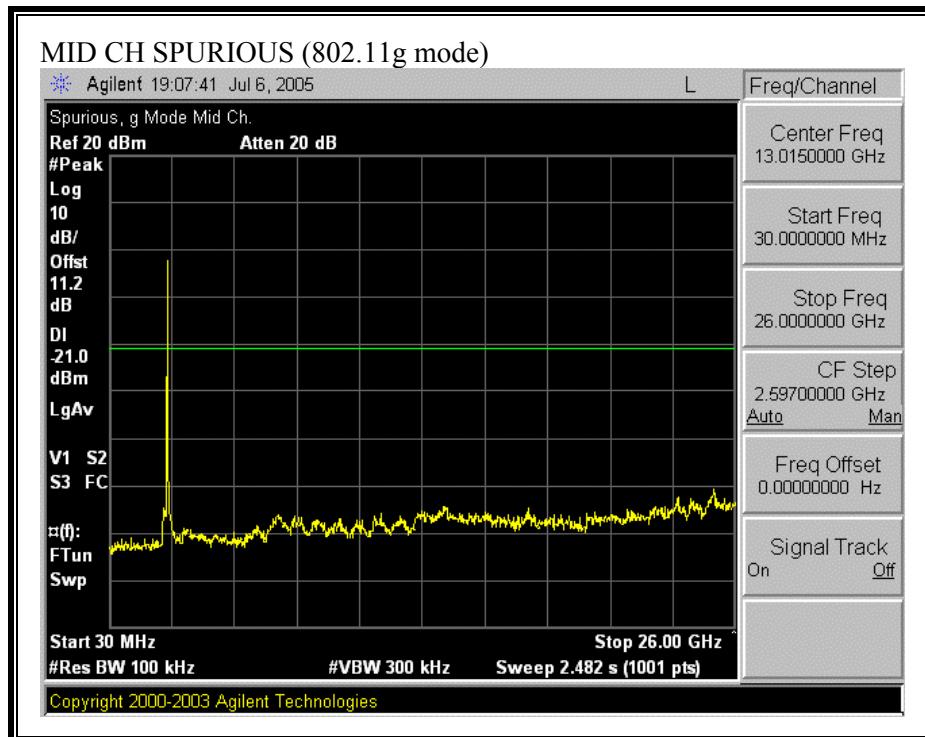

**SPURIOUS EMISSIONS, HIGH CHANNEL (802.11g MODE)**

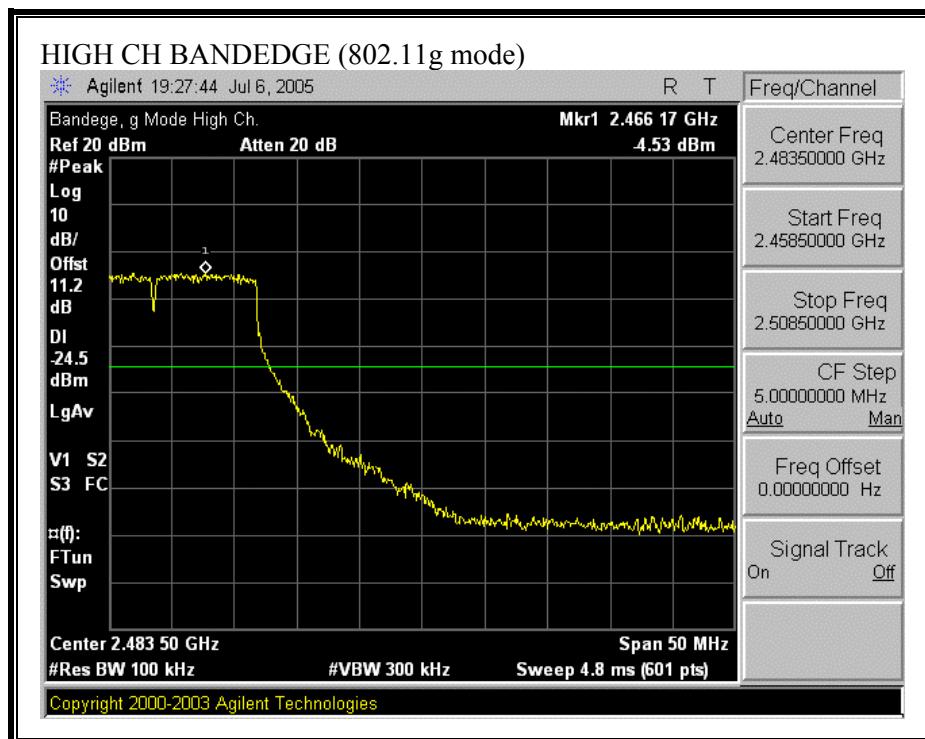

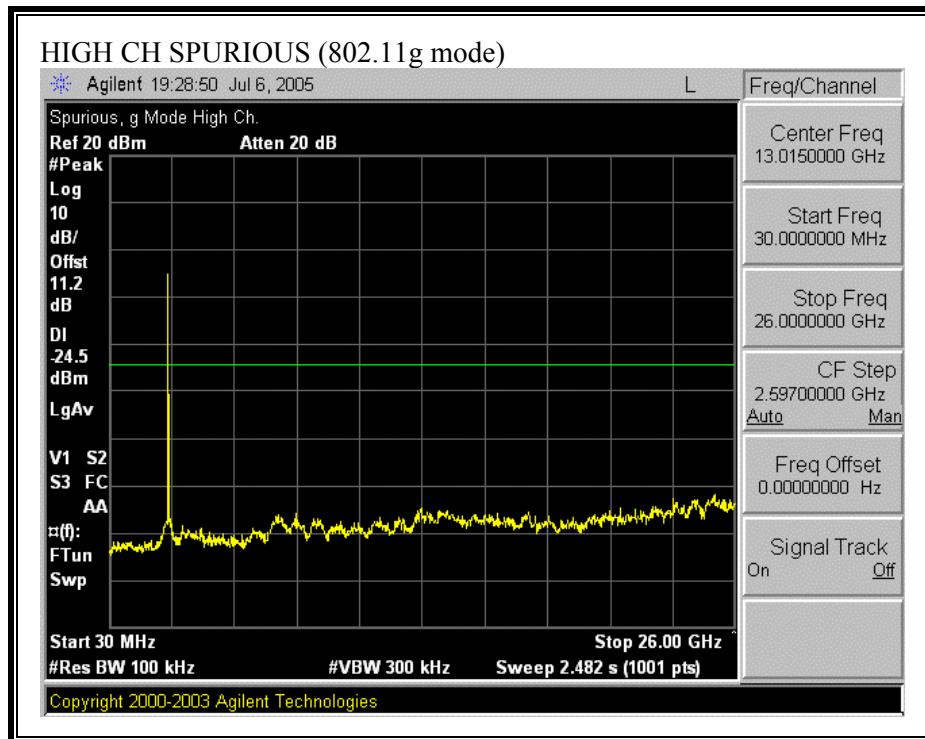

## 7.2. CHANNEL TESTS FOR THE 5725 TO 5850 MHz BAND

### 7.2.1. 6 dB BANDWIDTH

#### LIMIT

§15.247 (a) (2) For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.


#### RESULTS


No non-compliance noted:


802.11a Mode

Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	5745	16583	500	16083
Middle	5785	16500	500	16000
High	5825	16500	500	16000

**6 DB BANDWIDTH (802.11a MODE)**

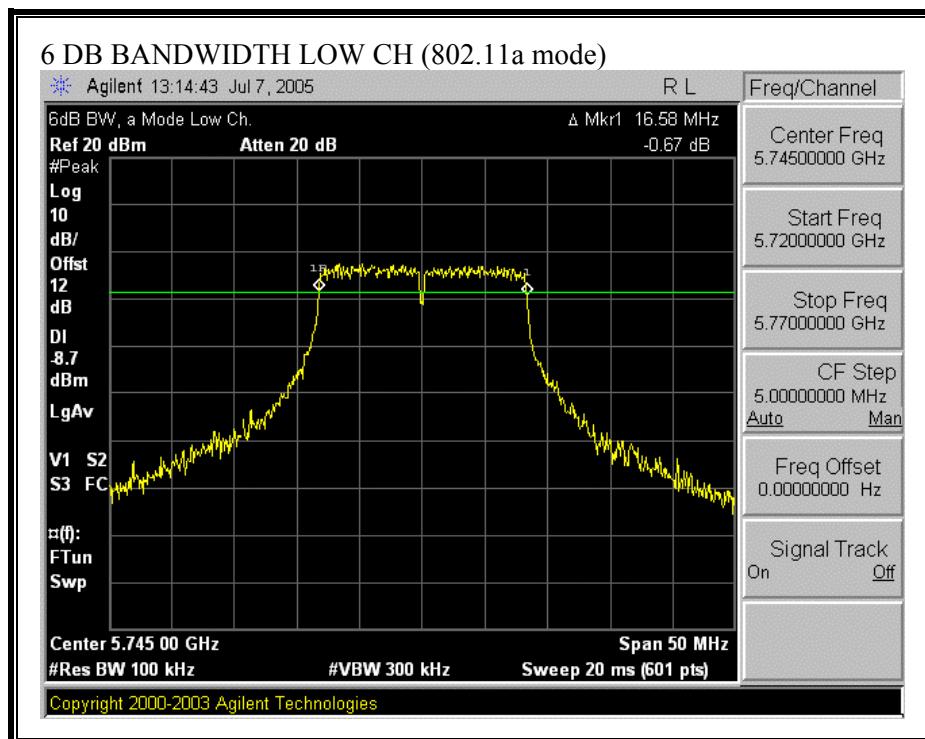

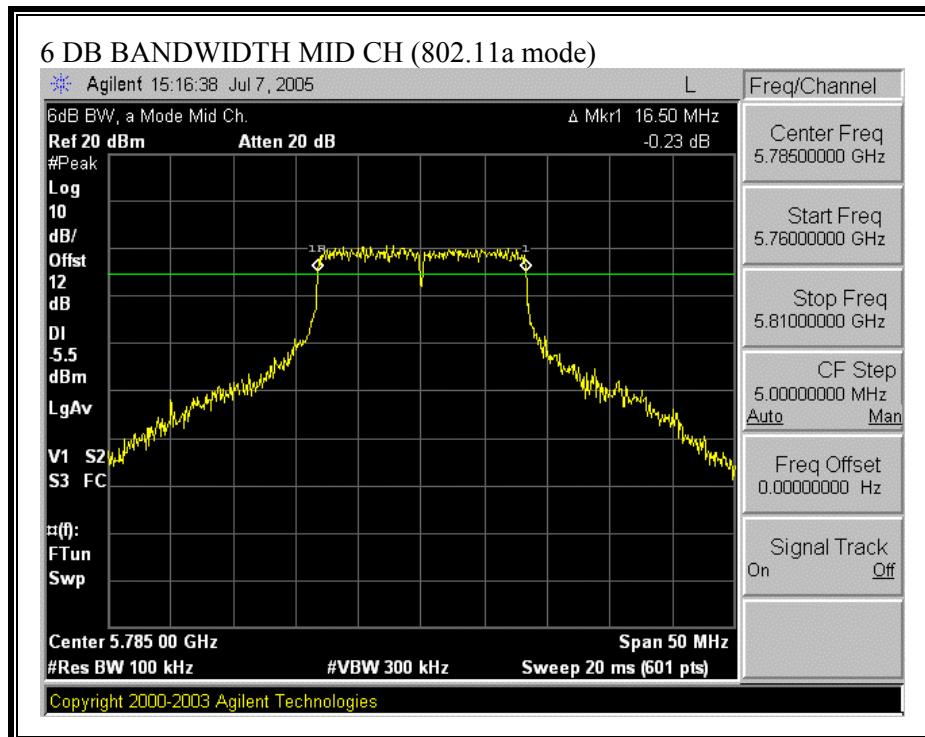

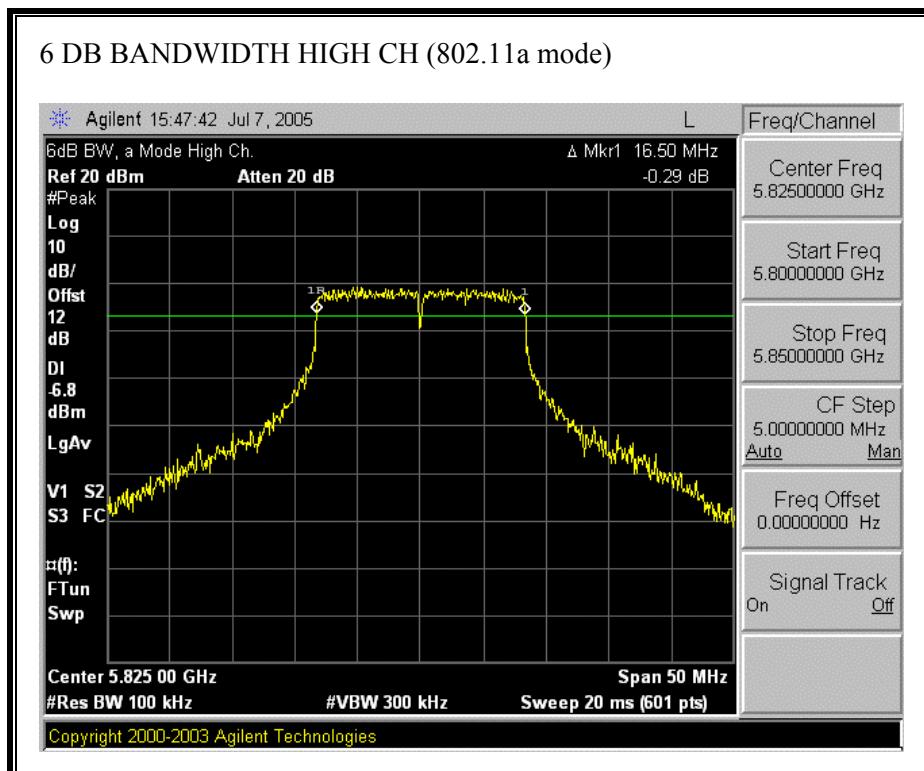

### 7.2.2. 99% BANDWIDTH

#### LIMIT

None; for reporting purposes only.

#### TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.


#### RESULTS


No non-compliance noted:


802.11a Mode

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5745	16.646
Middle	5785	16.722
High	5825	16.616

**99% BANDWIDTH (802.11a MODE)**

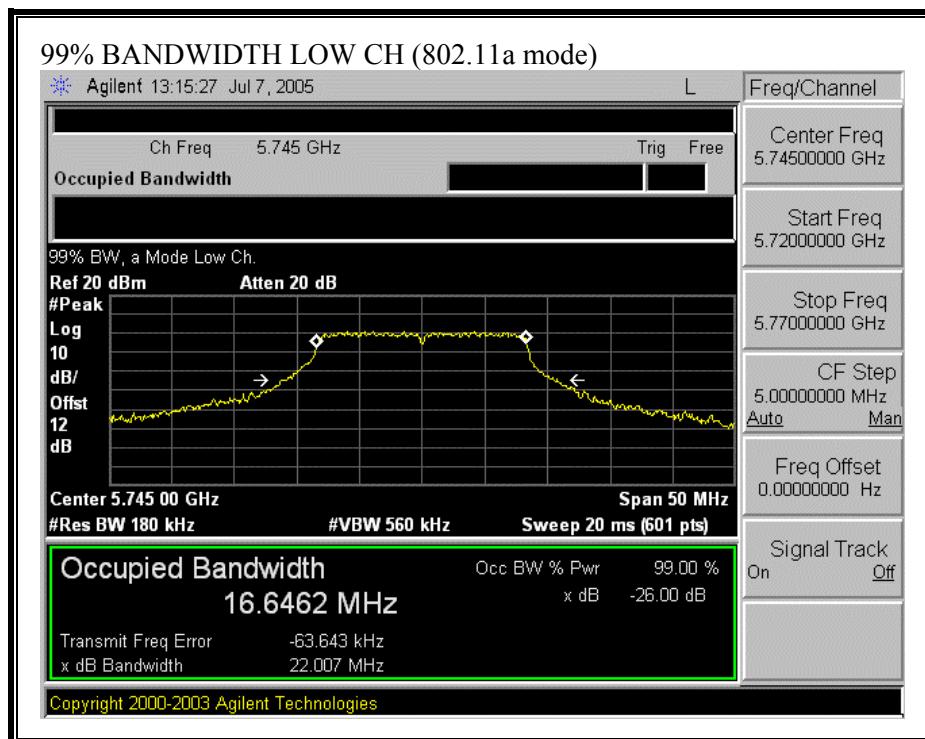

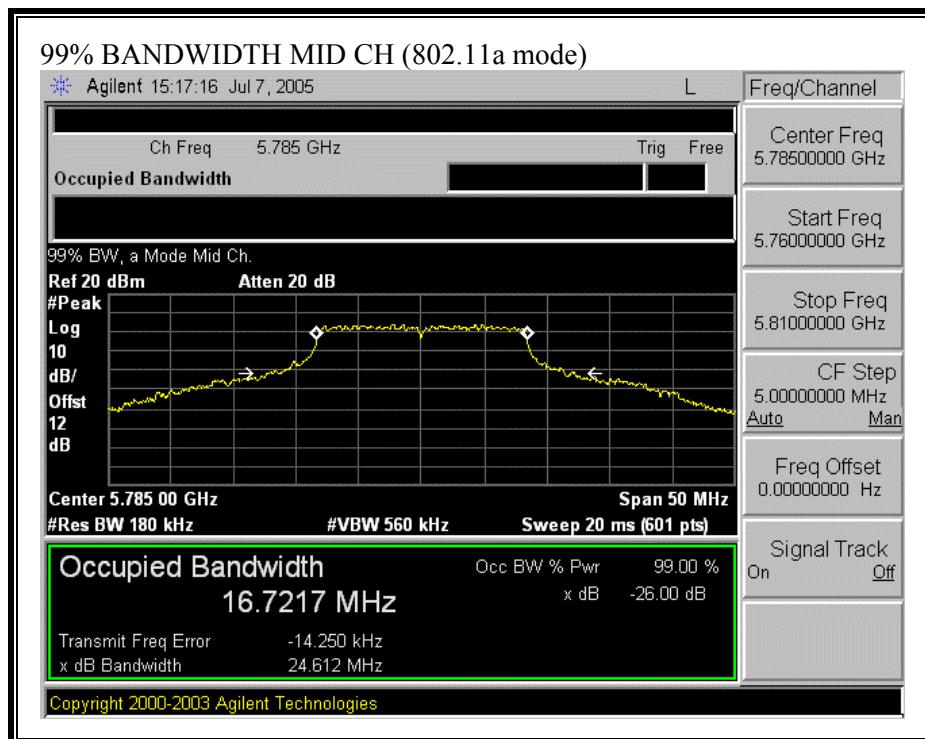

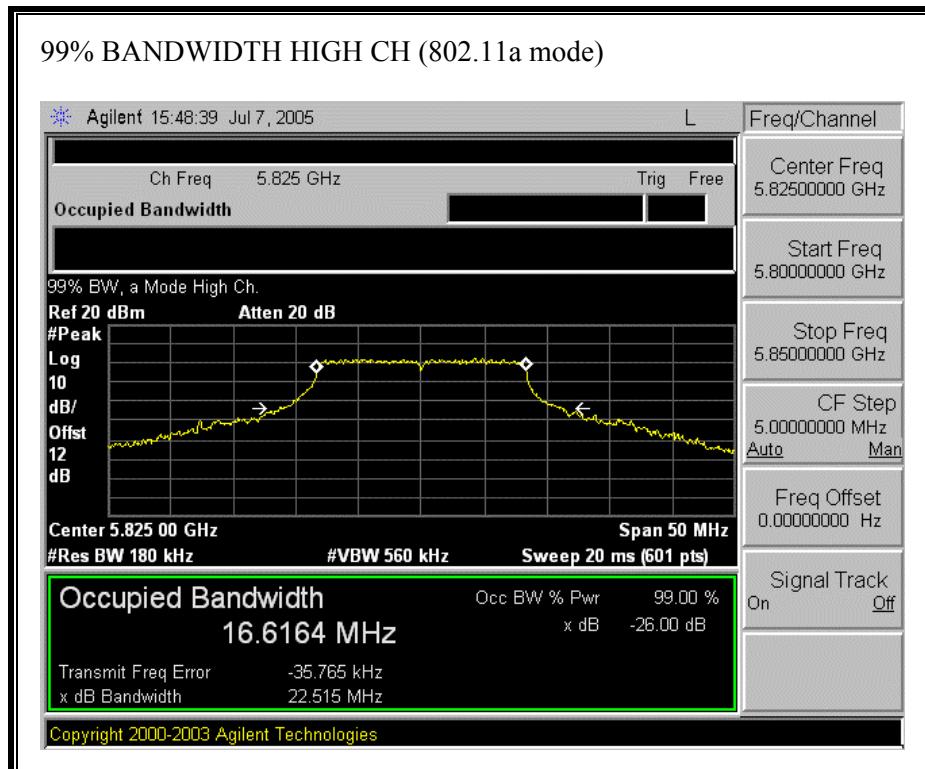

### 7.2.3. PEAK OUTPUT POWER

#### PEAK POWER LIMIT

§15.247 (b) The maximum peak output power of the intentional radiator shall not exceed the following:

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 watt.

§15.247 (b) (4) Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

§15.247 (b) (4) (ii) Systems operating in the 5725–5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth.

## **RESULTS**


The maximum antenna gain is less than 6dBi for other than fixed, point-to-point operations, therefore the limit is 30 dBm.


No non-compliance noted:


### 802.11a Mode

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	5745	19.84	30	-10.16
Middle	5785	22.74	30	-7.26
High	5825	21.24	30	-8.76

**OUTPUT POWER (802.11a MODE)**

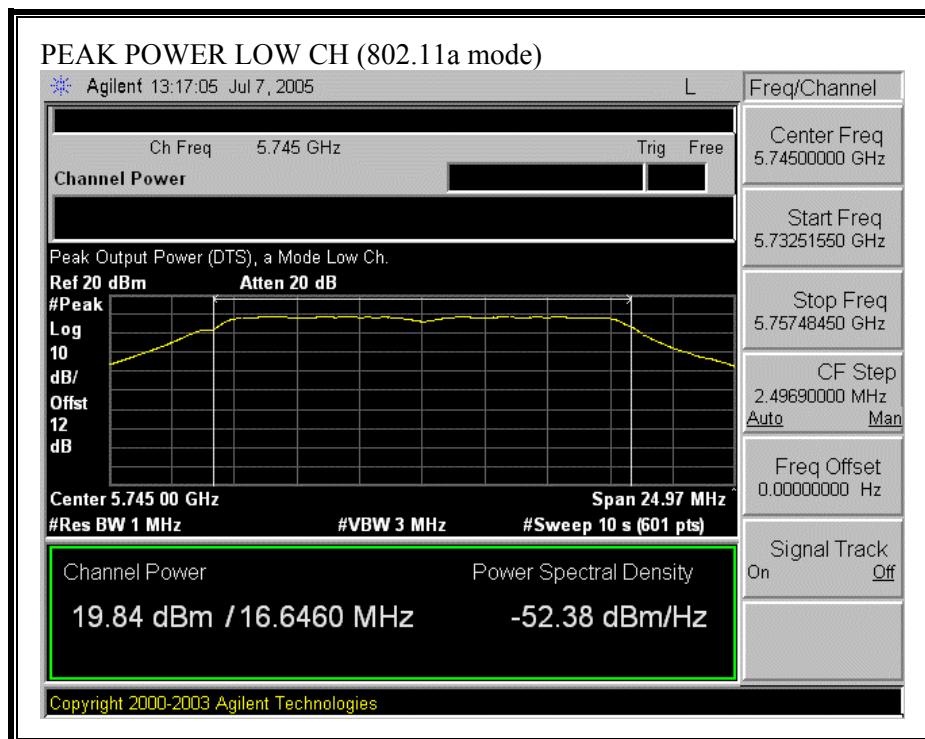

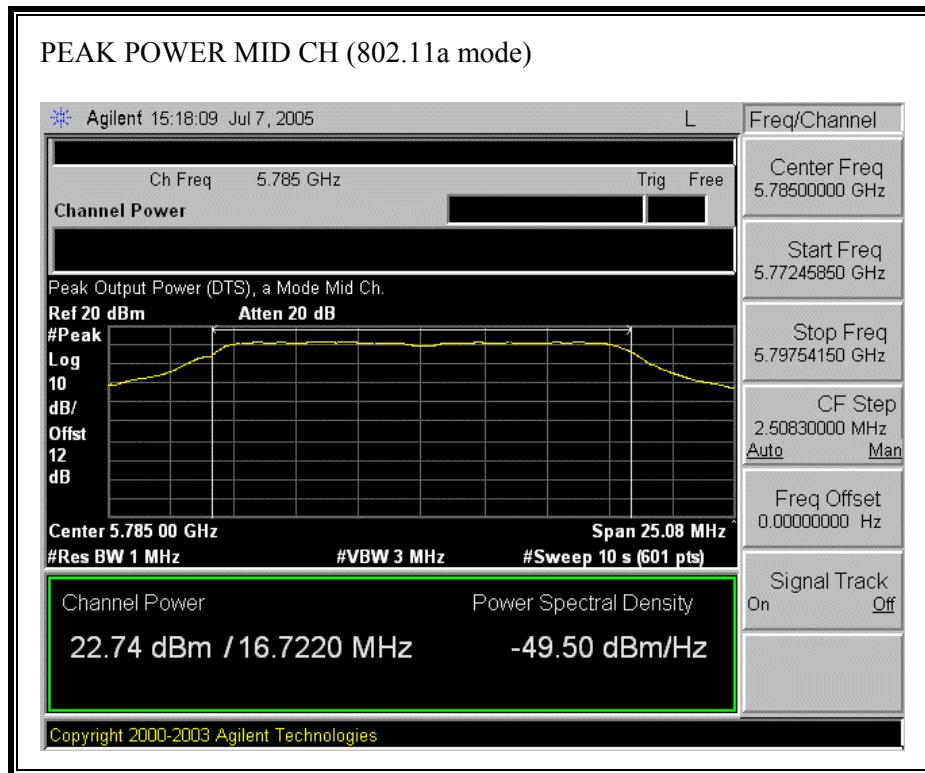

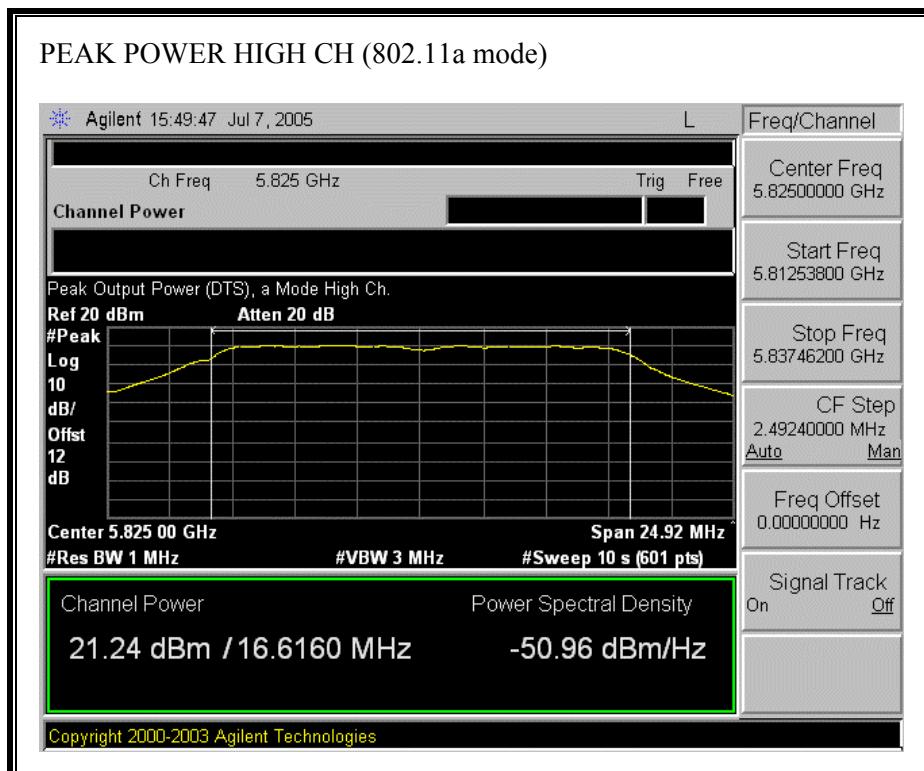

## 7.2.4. MAXIMUM PERMISSIBLE EXPOSURE

### LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842f	4.89f	*(900f <sup>2</sup> )	6
30–300	61.4	0.163	1.0	6
300–1500	.....	.....	f/300	6
1500–100,000	.....	.....	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824f	2.19f	*(180f <sup>2</sup> )	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500	.....	.....	f/1500	30
1500–100,000	.....	.....	1.0	30

f = frequency in MHz

\* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

## **CALCULATIONS**

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations and rearranging the terms to express the distance as a function of the remaining variables yields:

$$d = \sqrt{((30 * P * G) / (3770 * S))}$$

Changing to units of Power to mW and Distance to cm, using:

$$P (\text{mW}) = P (\text{W}) / 1000 \text{ and}$$

$$d (\text{cm}) = 100 * d (\text{m})$$

yields

$$d = 100 * \sqrt{((30 * (P / 1000) * G) / (3770 * S))}$$

$$d = 0.282 * \sqrt{(P * G / S)}$$

where

d = distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power Density in mW/cm<sup>2</sup>

Substituting the logarithmic form of power and gain using:

$$P (\text{mW}) = 10^{(P (\text{dBm}) / 10)} \text{ and}$$

$$G (\text{numeric}) = 10^{(G (\text{dBi}) / 10)}$$

yields

$$d = 0.282 * 10^{((P + G) / 20)} / \sqrt{S}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm<sup>2</sup>

Rearranging terms to calculate the power density at a specific distance yields

$$S = .0795 * 10^{((P + G) / 10)} / (d^2) \quad \text{Equation (1)}$$

**LIMITS**

From §1.1310 Table 1 (B), the maximum S = 1.0 mW/cm<sup>2</sup>

**RESULTS**

No non-compliance noted:

Mode	MPE Distance (cm)	Output Power (dBm)	Antenna Gain (dBi)	Power Density (mW/cm <sup>2</sup> )
802.11a	20.0	22.74	3.00	0.07

NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.

### 7.2.5. AVERAGE POWER

#### AVERAGE POWER LIMIT

None; for reporting purposes only.

#### TEST PROCEDURE

The transmitter output is connected to a power meter.

#### RESULTS

No non-compliance noted:

The cable assembly insertion loss of 11.97 dB (including 10 dB pad and 1.97 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

MODE / CHANNEL	TARGET AVERAGE POWER (dBm)	MEASURED AVERAGE POWER (dBm)	TEST UTILITY S/W SETTINGS
a mode 5745	14	13.7	15
a mode 5785	17	16.9	18
a mode 5825	14	13.9	16

### 7.2.6. PEAK POWER SPECTRAL DENSITY

#### LIMIT

§15.247 (d) For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer, the maximum level in a 3 kHz bandwidth is measured with the spectrum analyzer using RBW = 3 kHz and VBW > 3 kHz, sweep time = span / 3 kHz, and video averaging is turned off. The PPSD is the highest level found across the emission in any 3 kHz band.


#### RESULTS


No non-compliance noted:


802.11a Mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	5745	-16.72	8	-24.72
Middle	5785	-13.92	8	-21.92
High	5825	-15.43	8	-23.43

**PEAK POWER SPECTRAL DENSITY (802.11a MODE)**

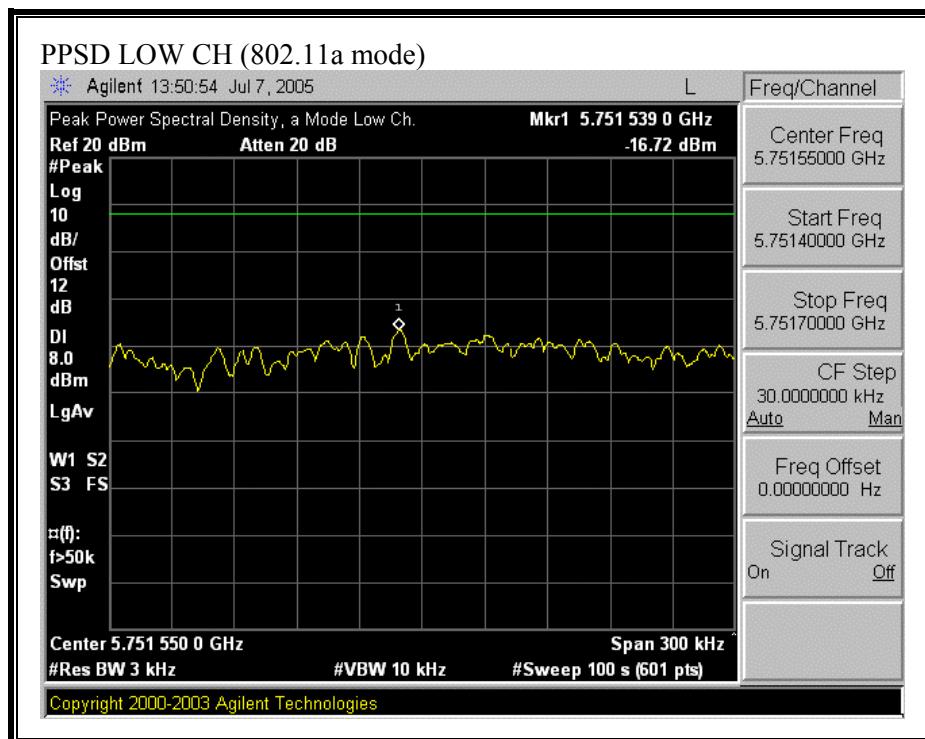

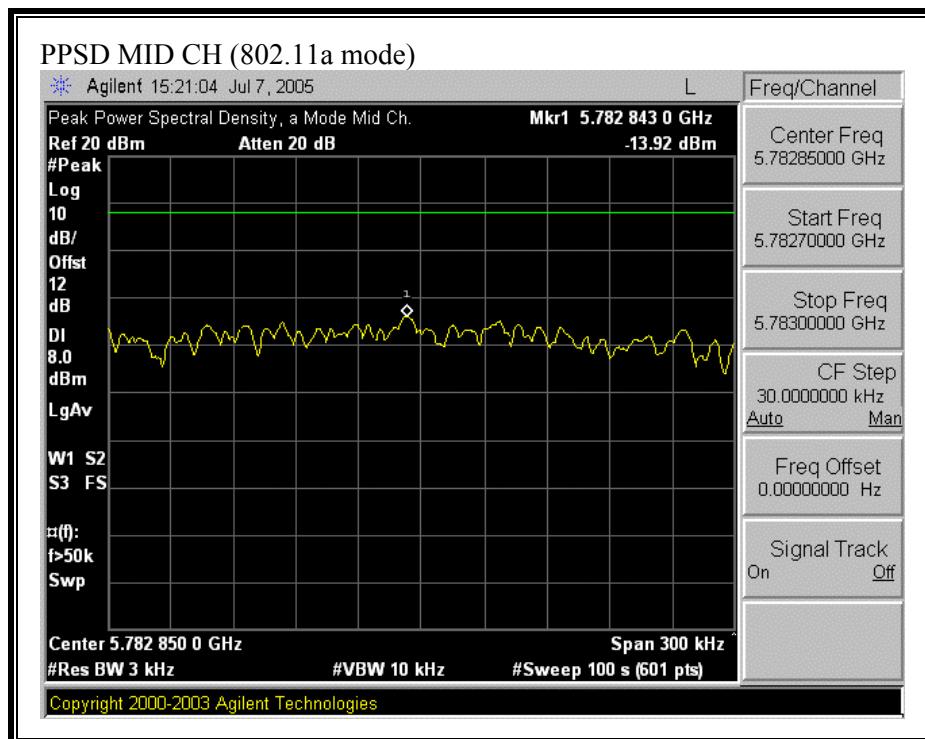

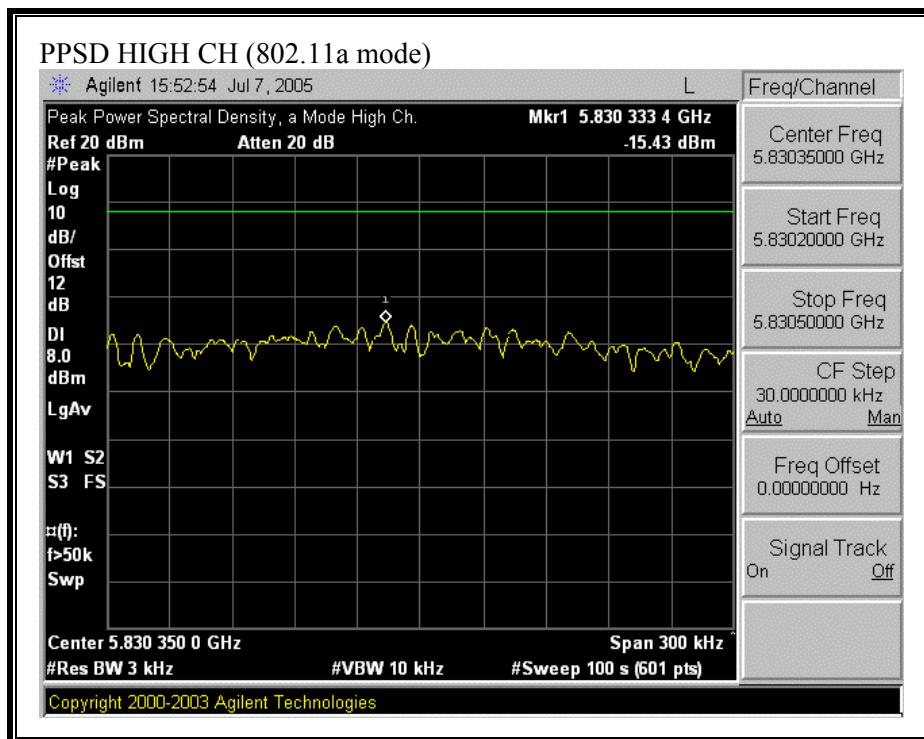

### 7.2.7. CONDUCTED SPURIOUS EMISSIONS

#### LIMITS

§15.247 (c) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

#### TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

#### RESULTS


No non-compliance noted:


**SPURIOUS EMISSIONS, LOW CHANNEL (802.11a MODE)**

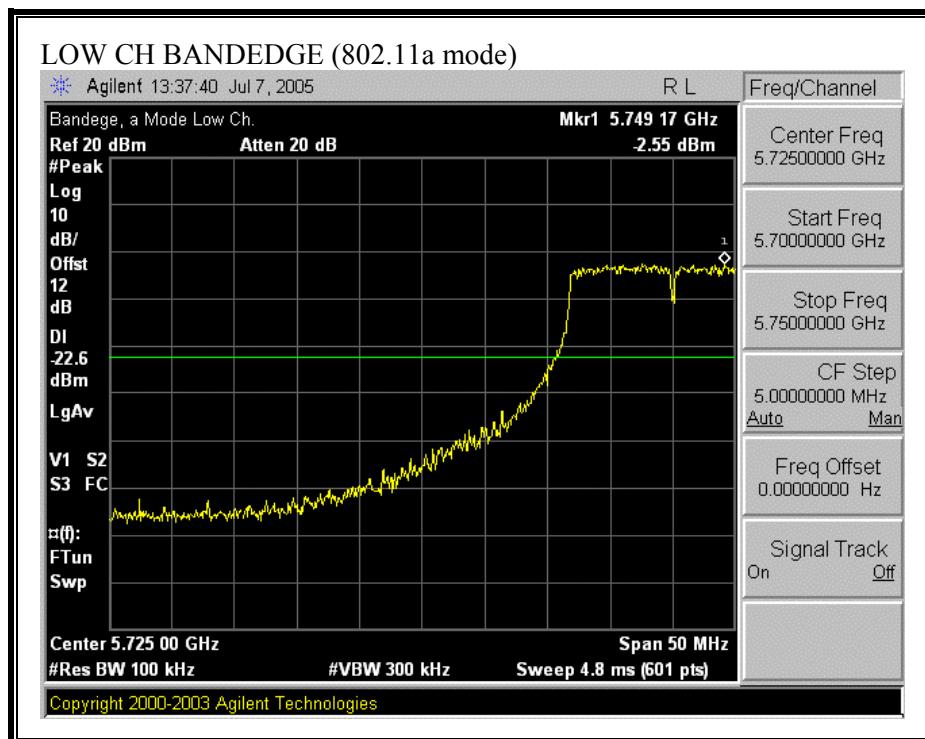

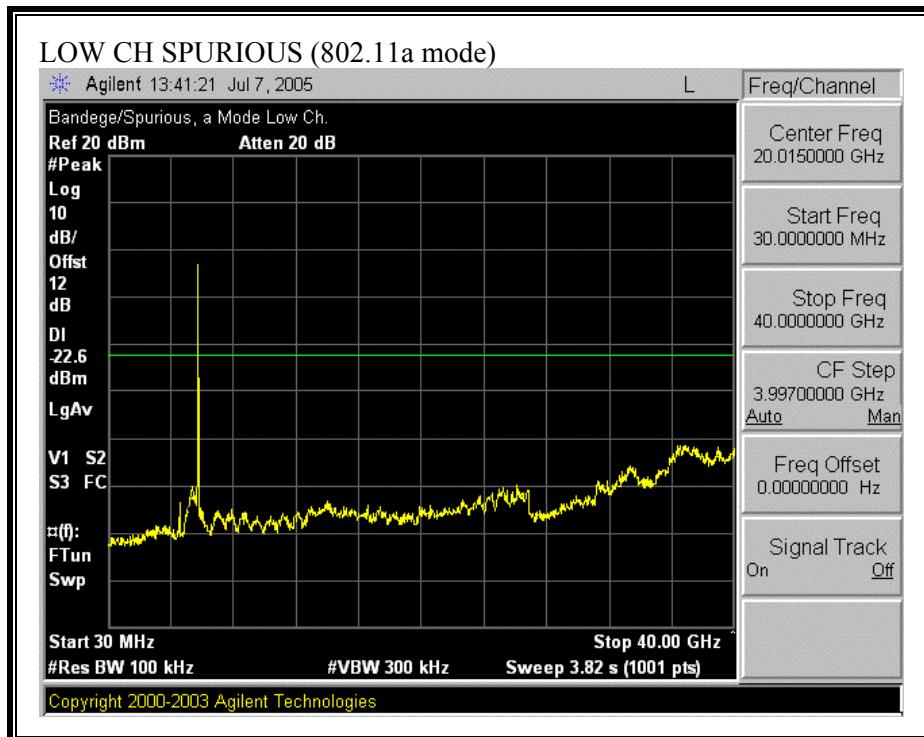



**SPURIOUS EMISSIONS, MID CHANNEL (802.11a MODE)**

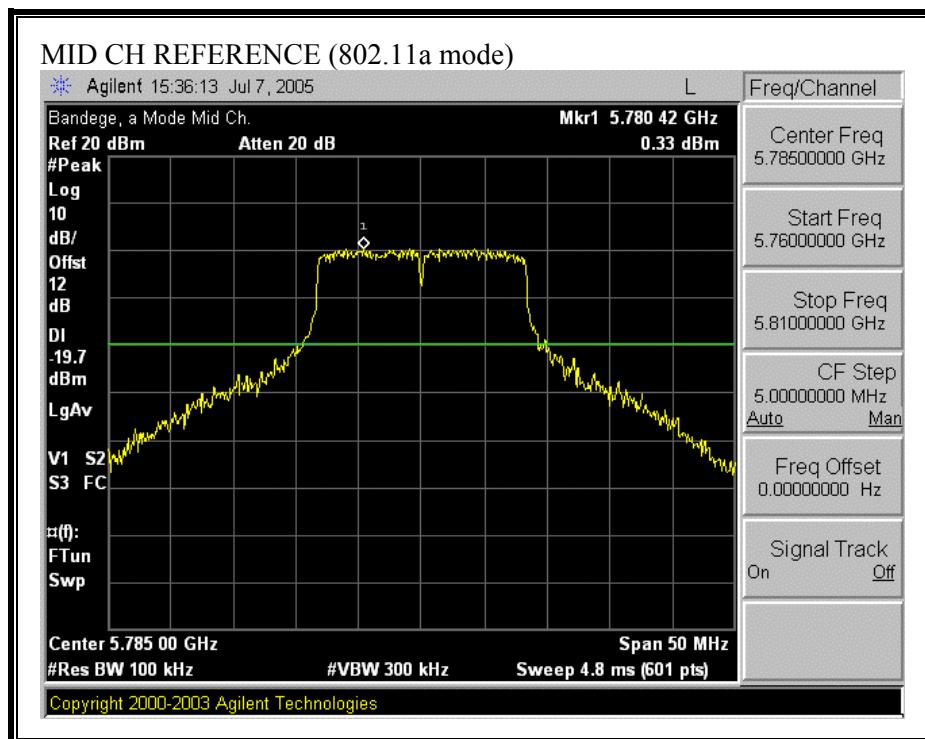

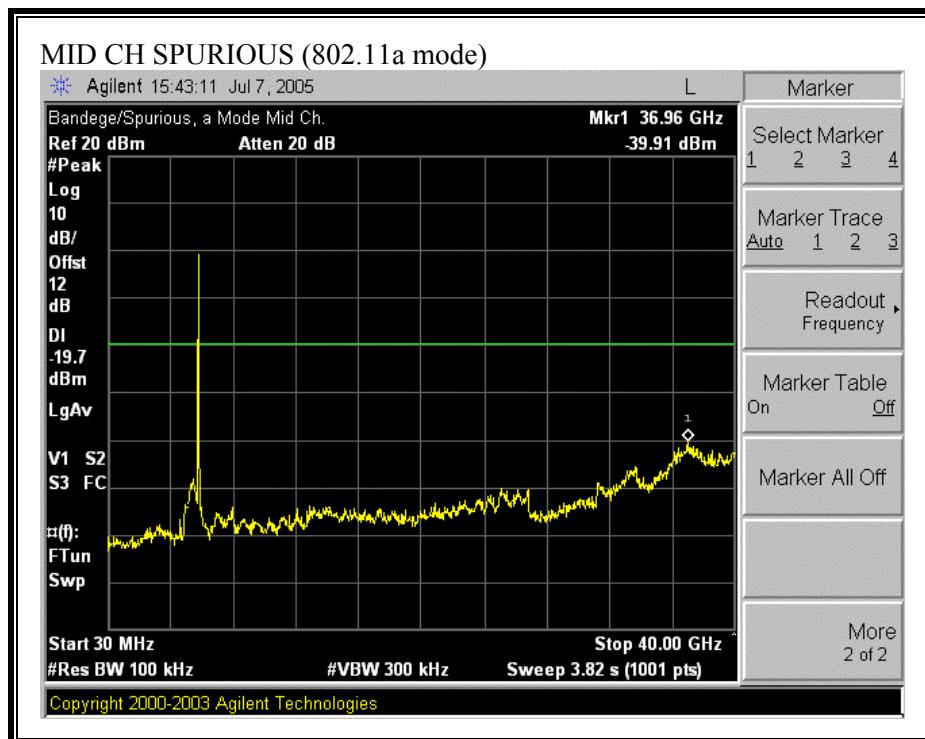

**SPURIOUS EMISSIONS, HIGH CHANNEL (802.11a MODE)**

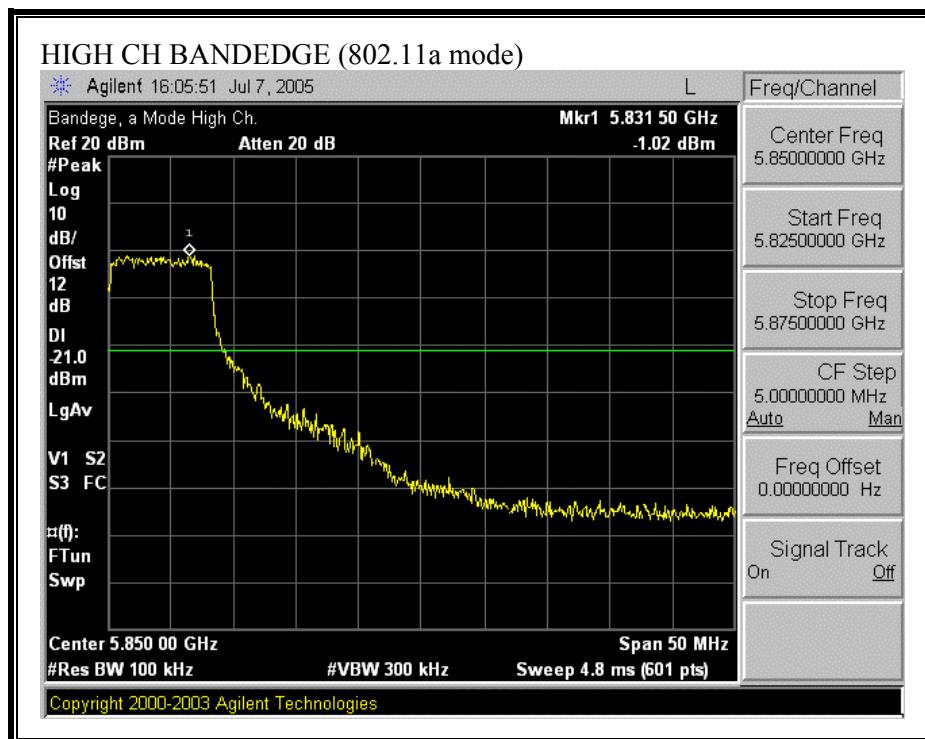

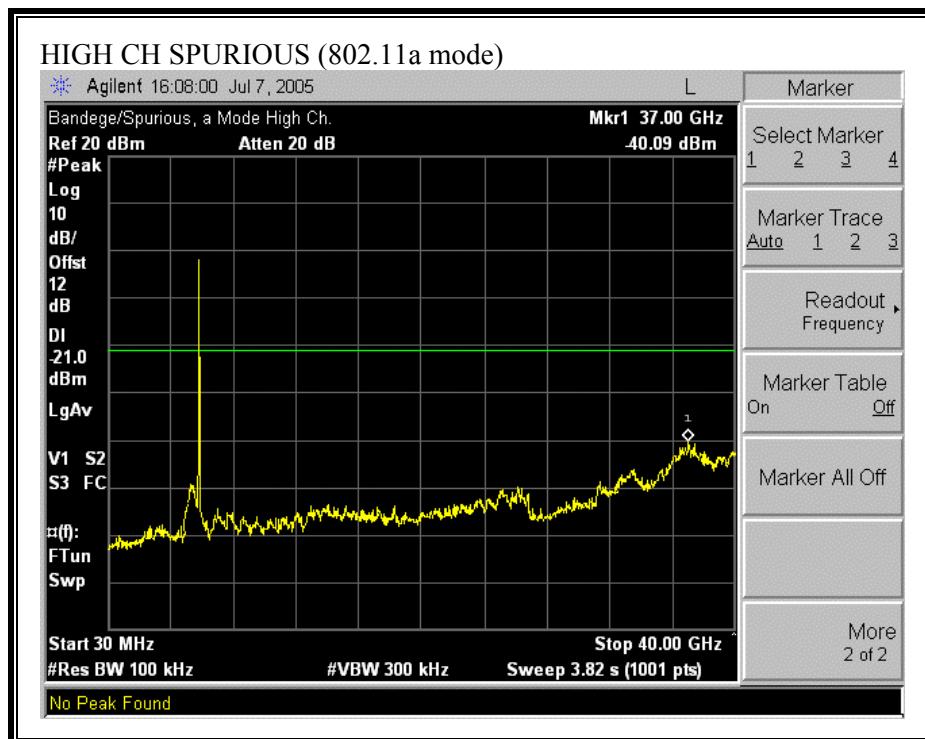

## 7.3. RADIATED EMISSIONS

### 7.3.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

#### LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

### **TEST PROCEDURE**

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each 5 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


### 7.3.2. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND


#### RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

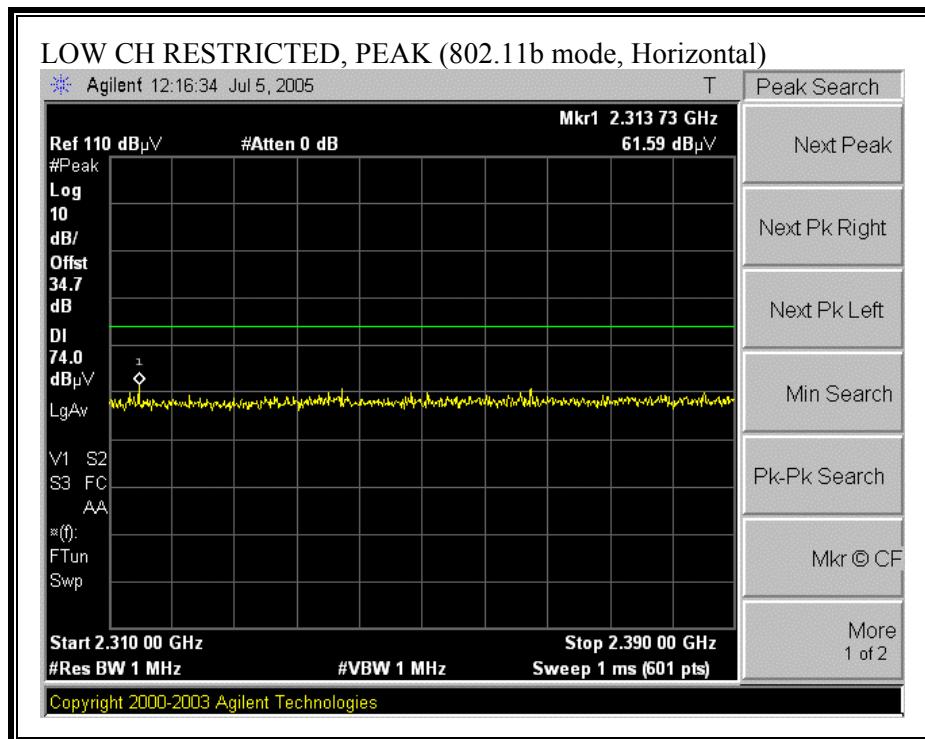

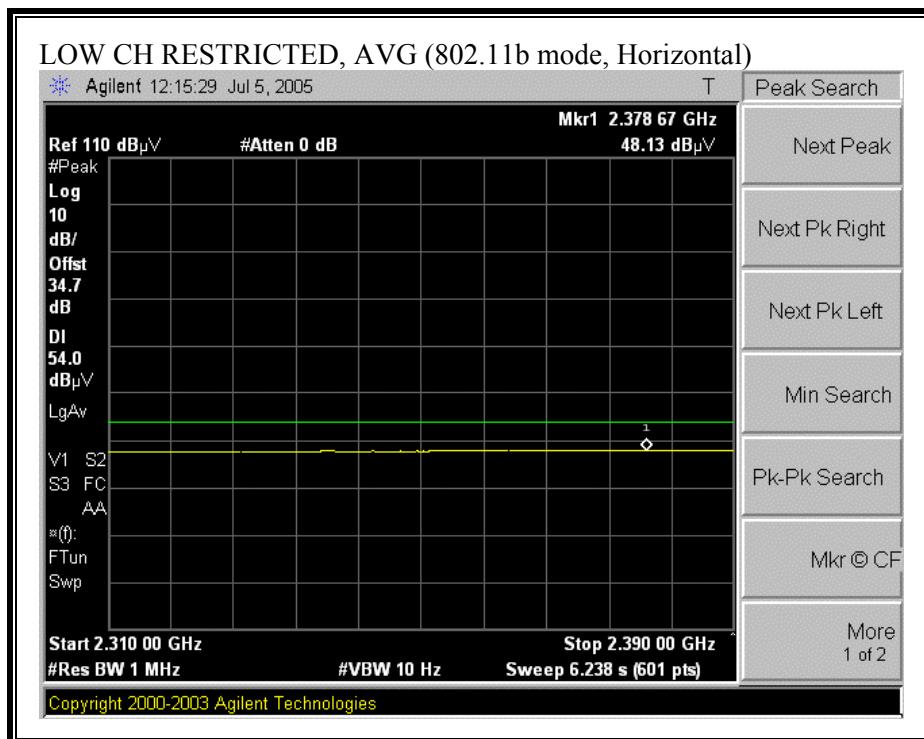



**RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)**

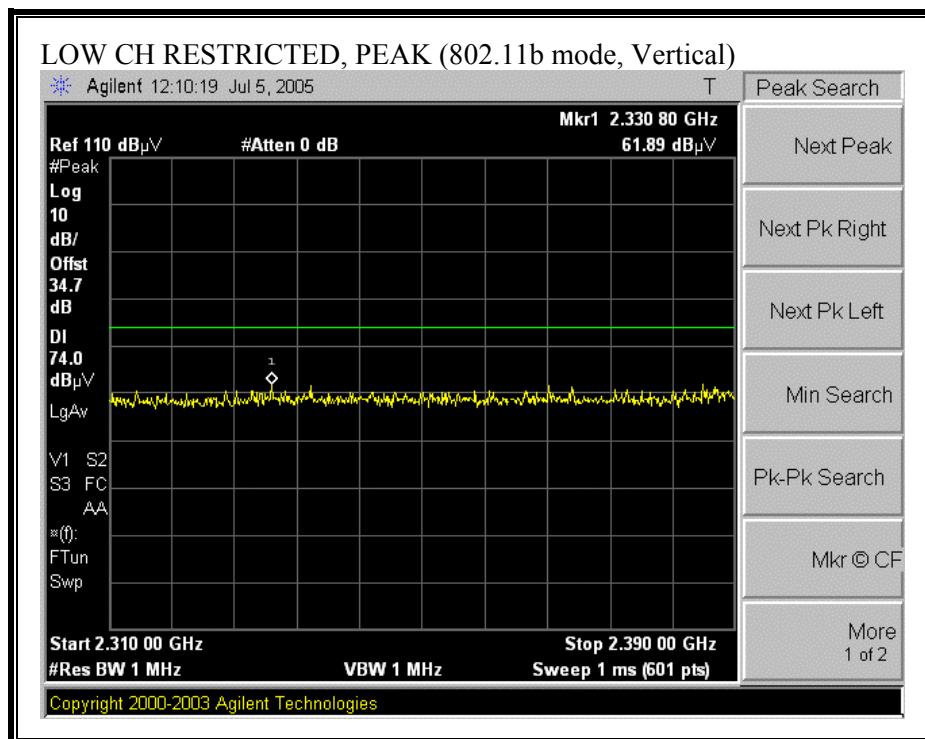

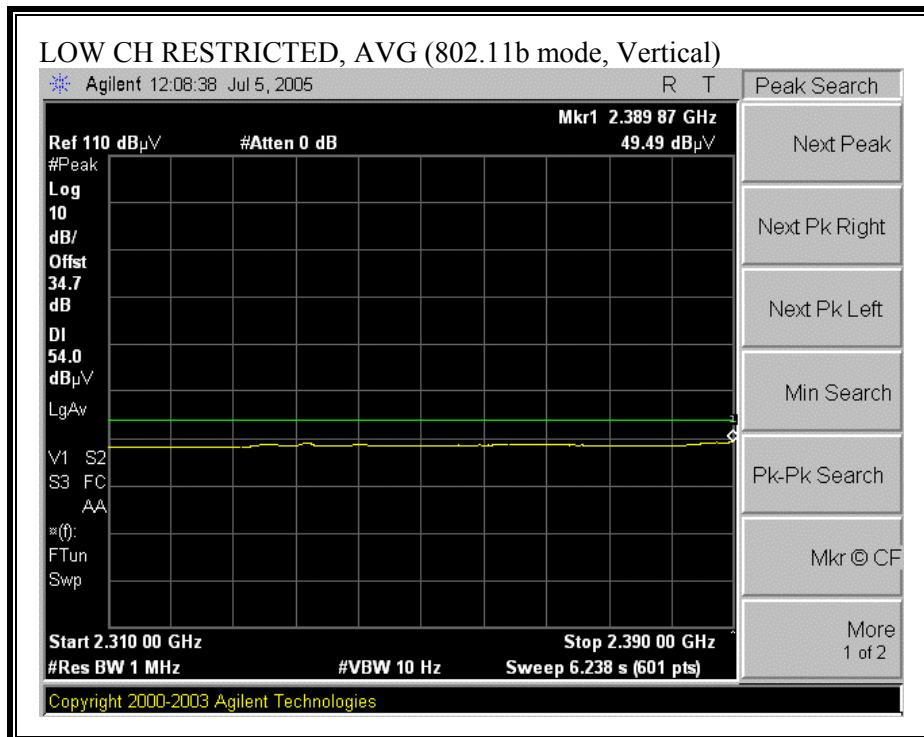



**RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)**

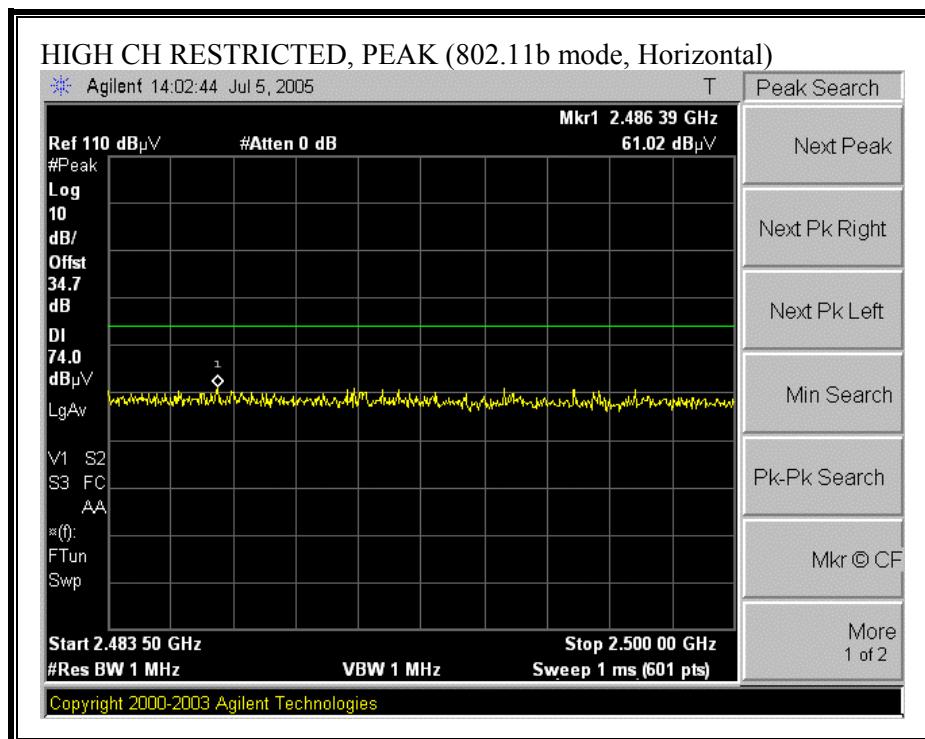

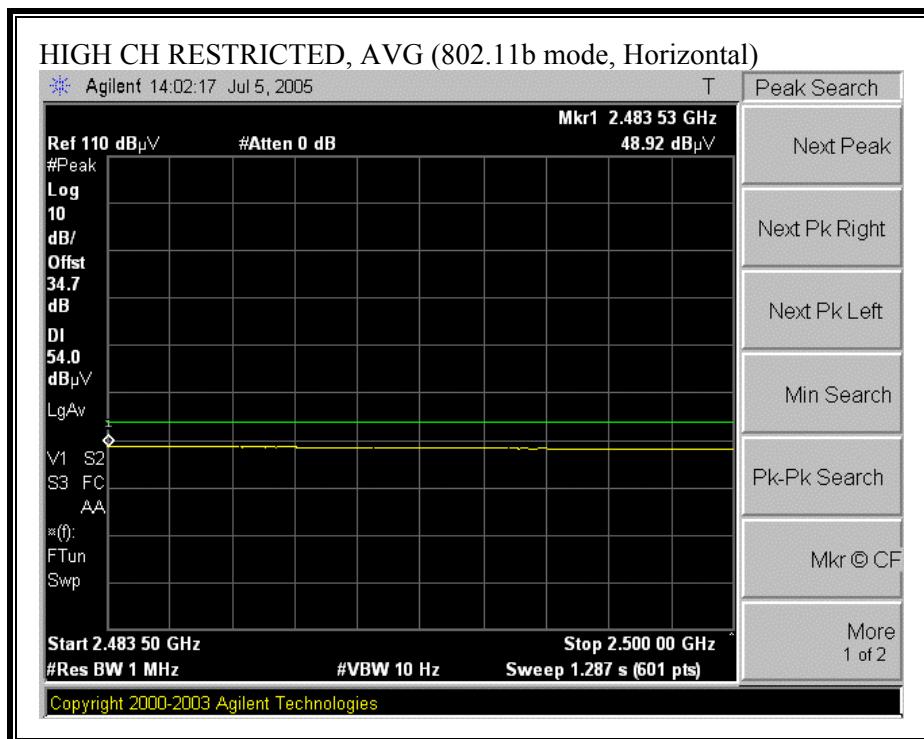

**RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)**

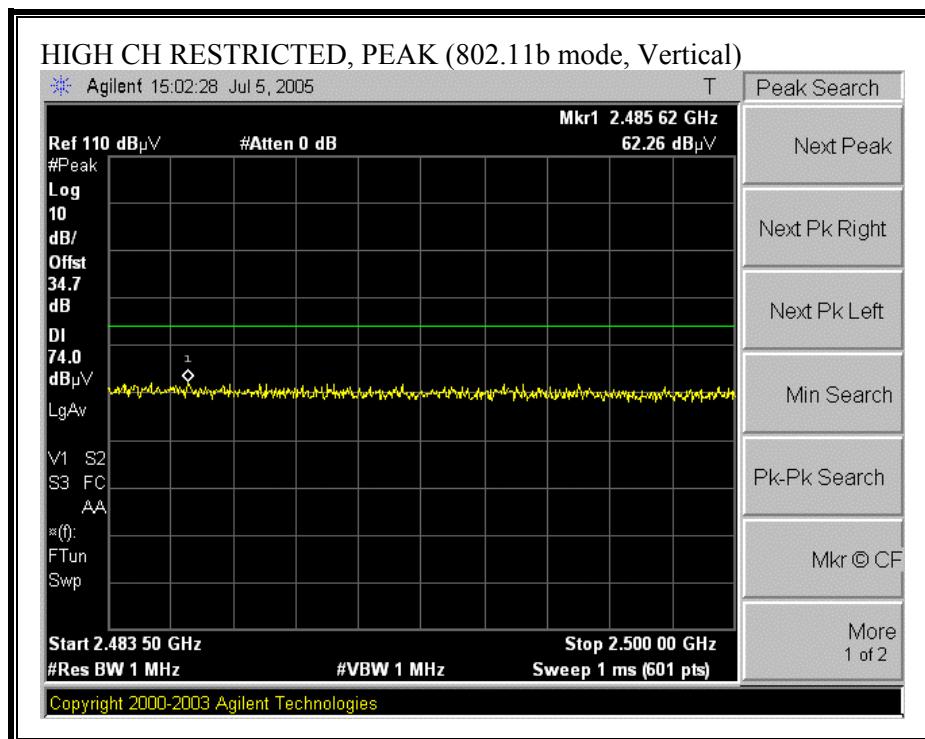


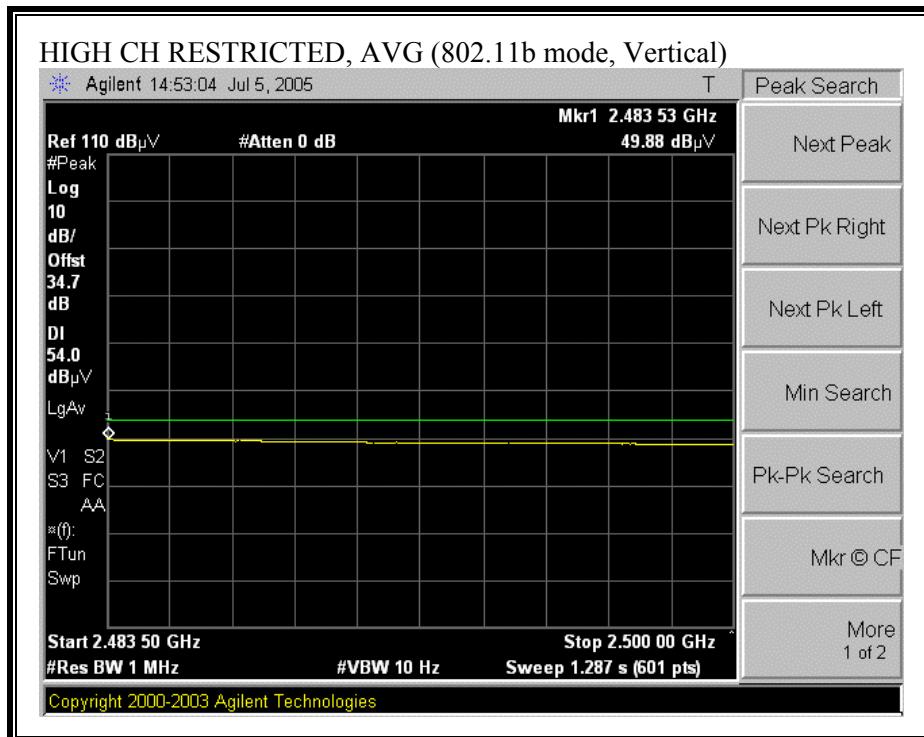


**HARMONICS AND SPURIOUS EMISSIONS (b MODE)**


07/05/05 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site																																																																																																																																																																																																																																							
<p>Test Engr: David Garcia  Project #: 05Uxxxx  Company: Microsoft  EUT Descrip.: X Box WLAN USB Interface  EUT M/N: OMNI  Test Target: FCC 15.205  Mode Oper: 11b Transmitting  Average Power Meter: Low = <b>16.17</b> dBm, Mid = <b>16.7</b> dBm, High = <b>16.1</b> dBm</p> <p><b>Test Equipment:</b></p> <p><b>Peak Measurements</b> RBW=VBW=1MHz</p> <p><b>Average Measurements</b> RBW=1MHz ; VBW=10Hz</p> <table border="1"> <thead> <tr> <th>f GHz</th> <th>Dist (m)</th> <th>Read Pk dBuV</th> <th>Read Avg. dBuV</th> <th>AF dB/m</th> <th>CL dB</th> <th>Amp dB</th> <th>D Corr dB</th> <th>Fltr dB</th> <th>Peak dBuV/m</th> <th>Avg dBuV/m</th> <th>Pk Lim dBuV/m</th> <th>Avg Lim dBuV/m</th> <th>Pk Mar dB</th> <th>Avg Mar dB</th> <th>Notes (V/H)</th> </tr> </thead> <tbody> <tr> <td colspan="15"><b>2412 Channel</b></td> </tr> <tr> <td>4.824</td> <td>3.0</td> <td>47.5</td> <td>36.0</td> <td>34.0</td> <td>5.5</td> <td>-37.9</td> <td>0.0</td> <td>0.6</td> <td>49.7</td> <td>38.2</td> <td>74</td> <td>54</td> <td><b>-24.3</b></td> <td><b>-15.8</b></td> <td>V</td> </tr> <tr> <td>4.824</td> <td>3.0</td> <td>46.6</td> <td>34.7</td> <td>34.0</td> <td>5.5</td> <td>-37.9</td> <td>0.0</td> <td>0.6</td> <td>48.8</td> <td>36.9</td> <td>74</td> <td>54</td> <td><b>-25.2</b></td> <td><b>-17.1</b></td> <td>H</td> </tr> <tr> <td colspan="15"><b>2437 Channel</b></td> </tr> <tr> <td>4.874</td> <td>3.0</td> <td>45.9</td> <td>34.9</td> <td>34.1</td> <td>5.5</td> <td>-37.9</td> <td>0.0</td> <td>0.6</td> <td>48.2</td> <td>37.2</td> <td>74</td> <td>54</td> <td><b>-25.8</b></td> <td><b>-16.8</b></td> <td>V</td> </tr> <tr> <td>4.874</td> <td>3.0</td> <td>46.2</td> <td>34.5</td> <td>34.1</td> <td>5.5</td> <td>-37.9</td> <td>0.0</td> <td>0.6</td> <td>48.5</td> <td>36.8</td> <td>74</td> <td>54</td> <td><b>-25.5</b></td> <td><b>-17.2</b></td> <td>H</td> </tr> <tr> <td colspan="15"><b>2462 Channel</b></td> </tr> <tr> <td>4.924</td> <td>3.0</td> <td>45.3</td> <td>34.1</td> <td>34.1</td> <td>5.6</td> <td>-37.9</td> <td>0.0</td> <td>0.6</td> <td>47.6</td> <td>36.4</td> <td>74</td> <td>54</td> <td><b>-26.4</b></td> <td><b>-17.6</b></td> <td>V</td> </tr> <tr> <td>4.924</td> <td>3.0</td> <td>46.0</td> <td>33.9</td> <td>34.1</td> <td>5.6</td> <td>-37.9</td> <td>0.0</td> <td>0.6</td> <td>48.3</td> <td>36.2</td> <td>74</td> <td>54</td> <td><b>-25.7</b></td> <td><b>-17.8</b></td> <td>H</td> </tr> <tr> <td colspan="15">No further emissions were detected above the noise floor of the test receiver.</td> </tr> <tr> <td colspan="15"> <table border="0"> <tr> <td>f</td> <td>Measurement Frequency</td> <td>Amp</td> <td>Preamp Gain</td> <td>Avg Lim</td> <td>Average Field Strength Limit</td> </tr> <tr> <td>Dist</td> <td>Distance to Antenna</td> <td>D Corr</td> <td>Distance Correct to 3 meters</td> <td>Pk Lim</td> <td>Peak Field Strength Limit</td> </tr> <tr> <td>Read</td> <td>Analyzer Reading</td> <td>Avg</td> <td>Average Field Strength @ 3 m</td> <td>Avg Mar</td> <td>Margin vs. Average Limit</td> </tr> <tr> <td>AF</td> <td>Antenna Factor</td> <td>Peak</td> <td>Calculated Peak Field Strength</td> <td>Pk Mar</td> <td>Margin vs. Peak Limit</td> </tr> <tr> <td>CL</td> <td>Cable Loss</td> <td>HPF</td> <td>High Pass Filter</td> <td></td> <td></td> </tr> </table> </td> </tr> </tbody> </table>															f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	<b>2412 Channel</b>															4.824	3.0	47.5	36.0	34.0	5.5	-37.9	0.0	0.6	49.7	38.2	74	54	<b>-24.3</b>	<b>-15.8</b>	V	4.824	3.0	46.6	34.7	34.0	5.5	-37.9	0.0	0.6	48.8	36.9	74	54	<b>-25.2</b>	<b>-17.1</b>	H	<b>2437 Channel</b>															4.874	3.0	45.9	34.9	34.1	5.5	-37.9	0.0	0.6	48.2	37.2	74	54	<b>-25.8</b>	<b>-16.8</b>	V	4.874	3.0	46.2	34.5	34.1	5.5	-37.9	0.0	0.6	48.5	36.8	74	54	<b>-25.5</b>	<b>-17.2</b>	H	<b>2462 Channel</b>															4.924	3.0	45.3	34.1	34.1	5.6	-37.9	0.0	0.6	47.6	36.4	74	54	<b>-26.4</b>	<b>-17.6</b>	V	4.924	3.0	46.0	33.9	34.1	5.6	-37.9	0.0	0.6	48.3	36.2	74	54	<b>-25.7</b>	<b>-17.8</b>	H	No further emissions were detected above the noise floor of the test receiver.															<table border="0"> <tr> <td>f</td> <td>Measurement Frequency</td> <td>Amp</td> <td>Preamp Gain</td> <td>Avg Lim</td> <td>Average Field Strength Limit</td> </tr> <tr> <td>Dist</td> <td>Distance to Antenna</td> <td>D Corr</td> <td>Distance Correct to 3 meters</td> <td>Pk Lim</td> <td>Peak Field Strength Limit</td> </tr> <tr> <td>Read</td> <td>Analyzer Reading</td> <td>Avg</td> <td>Average Field Strength @ 3 m</td> <td>Avg Mar</td> <td>Margin vs. Average Limit</td> </tr> <tr> <td>AF</td> <td>Antenna Factor</td> <td>Peak</td> <td>Calculated Peak Field Strength</td> <td>Pk Mar</td> <td>Margin vs. Peak Limit</td> </tr> <tr> <td>CL</td> <td>Cable Loss</td> <td>HPF</td> <td>High Pass Filter</td> <td></td> <td></td> </tr> </table>															f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit	Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit	Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit	AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit	CL	Cable Loss	HPF	High Pass Filter		
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)																																																																																																																																																																																																																								
<b>2412 Channel</b>																																																																																																																																																																																																																																							
4.824	3.0	47.5	36.0	34.0	5.5	-37.9	0.0	0.6	49.7	38.2	74	54	<b>-24.3</b>	<b>-15.8</b>	V																																																																																																																																																																																																																								
4.824	3.0	46.6	34.7	34.0	5.5	-37.9	0.0	0.6	48.8	36.9	74	54	<b>-25.2</b>	<b>-17.1</b>	H																																																																																																																																																																																																																								
<b>2437 Channel</b>																																																																																																																																																																																																																																							
4.874	3.0	45.9	34.9	34.1	5.5	-37.9	0.0	0.6	48.2	37.2	74	54	<b>-25.8</b>	<b>-16.8</b>	V																																																																																																																																																																																																																								
4.874	3.0	46.2	34.5	34.1	5.5	-37.9	0.0	0.6	48.5	36.8	74	54	<b>-25.5</b>	<b>-17.2</b>	H																																																																																																																																																																																																																								
<b>2462 Channel</b>																																																																																																																																																																																																																																							
4.924	3.0	45.3	34.1	34.1	5.6	-37.9	0.0	0.6	47.6	36.4	74	54	<b>-26.4</b>	<b>-17.6</b>	V																																																																																																																																																																																																																								
4.924	3.0	46.0	33.9	34.1	5.6	-37.9	0.0	0.6	48.3	36.2	74	54	<b>-25.7</b>	<b>-17.8</b>	H																																																																																																																																																																																																																								
No further emissions were detected above the noise floor of the test receiver.																																																																																																																																																																																																																																							
<table border="0"> <tr> <td>f</td> <td>Measurement Frequency</td> <td>Amp</td> <td>Preamp Gain</td> <td>Avg Lim</td> <td>Average Field Strength Limit</td> </tr> <tr> <td>Dist</td> <td>Distance to Antenna</td> <td>D Corr</td> <td>Distance Correct to 3 meters</td> <td>Pk Lim</td> <td>Peak Field Strength Limit</td> </tr> <tr> <td>Read</td> <td>Analyzer Reading</td> <td>Avg</td> <td>Average Field Strength @ 3 m</td> <td>Avg Mar</td> <td>Margin vs. Average Limit</td> </tr> <tr> <td>AF</td> <td>Antenna Factor</td> <td>Peak</td> <td>Calculated Peak Field Strength</td> <td>Pk Mar</td> <td>Margin vs. Peak Limit</td> </tr> <tr> <td>CL</td> <td>Cable Loss</td> <td>HPF</td> <td>High Pass Filter</td> <td></td> <td></td> </tr> </table>															f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit	Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit	Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit	AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit	CL	Cable Loss	HPF	High Pass Filter																																																																																																																																																																																													
f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit																																																																																																																																																																																																																																		
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit																																																																																																																																																																																																																																		
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit																																																																																																																																																																																																																																		
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit																																																																																																																																																																																																																																		
CL	Cable Loss	HPF	High Pass Filter																																																																																																																																																																																																																																				


**RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)**

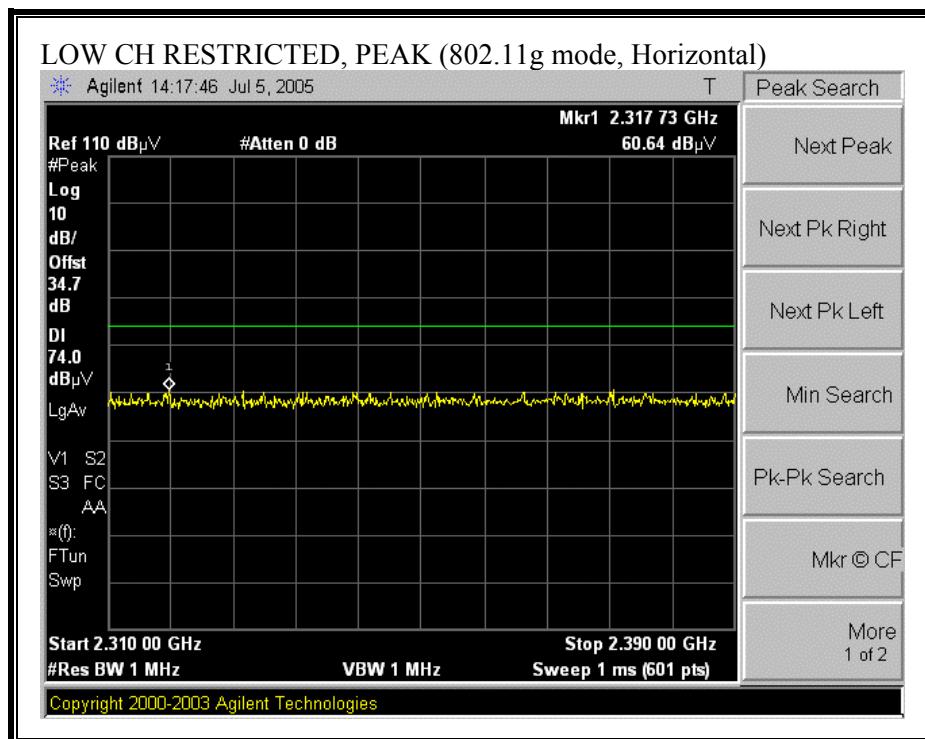

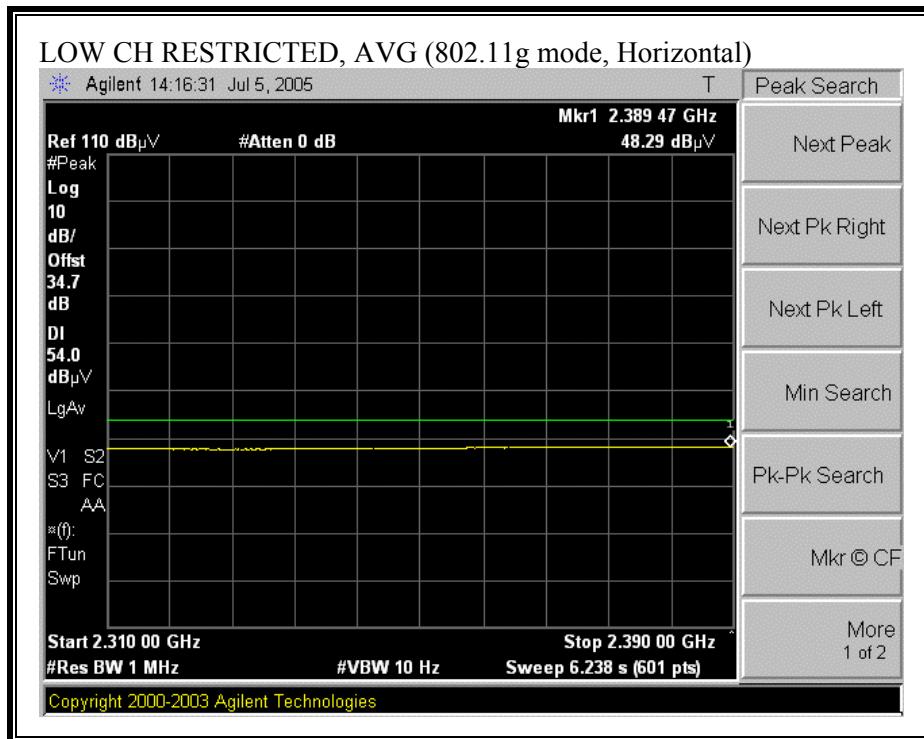



**RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)**

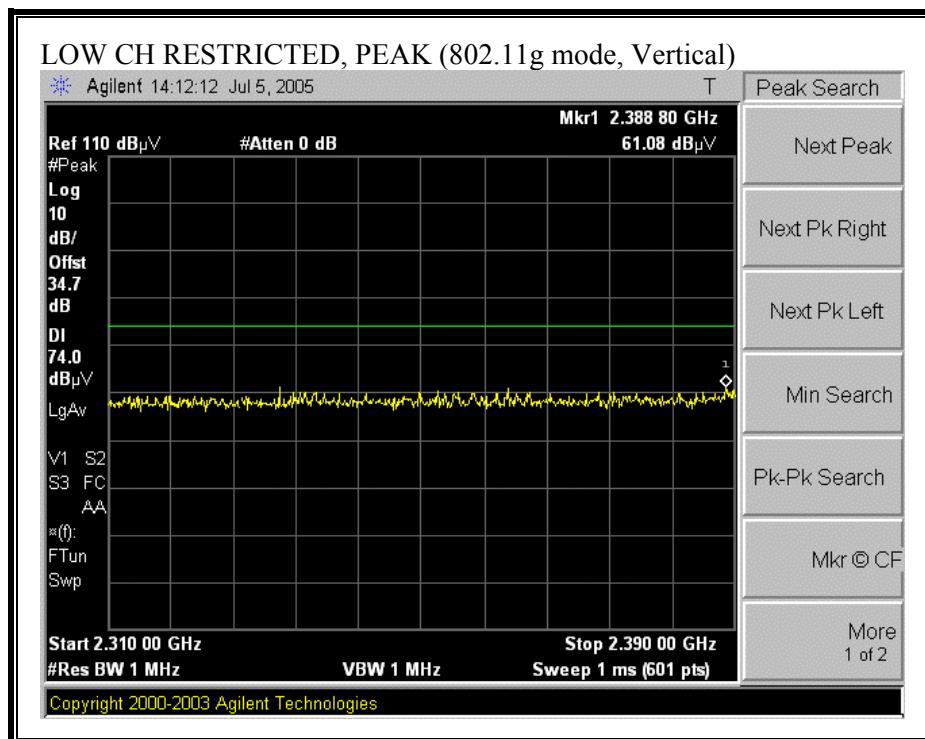

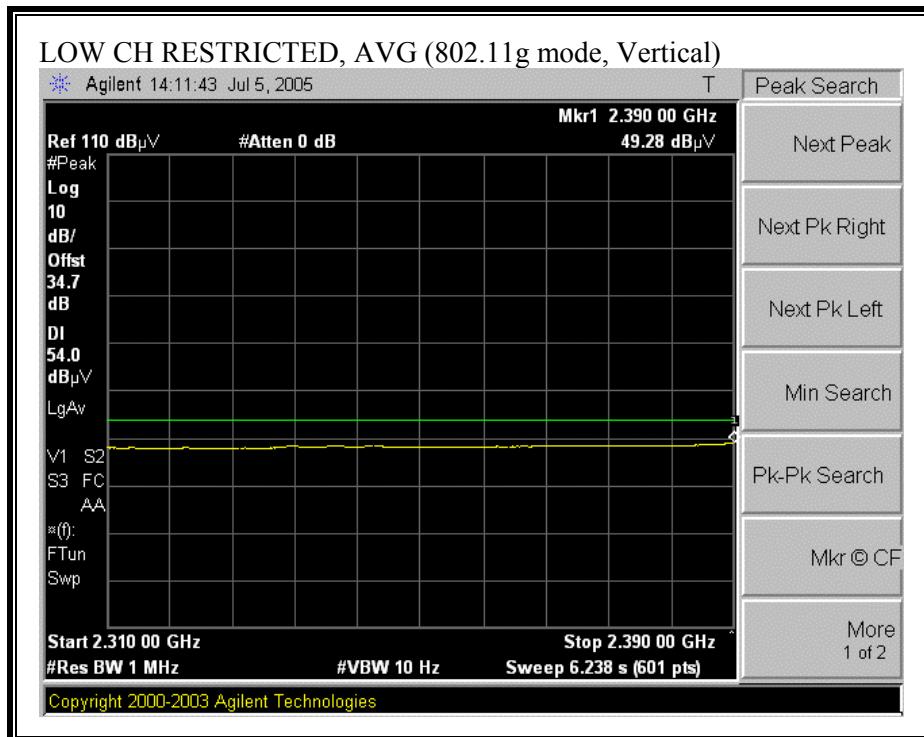



**RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)**

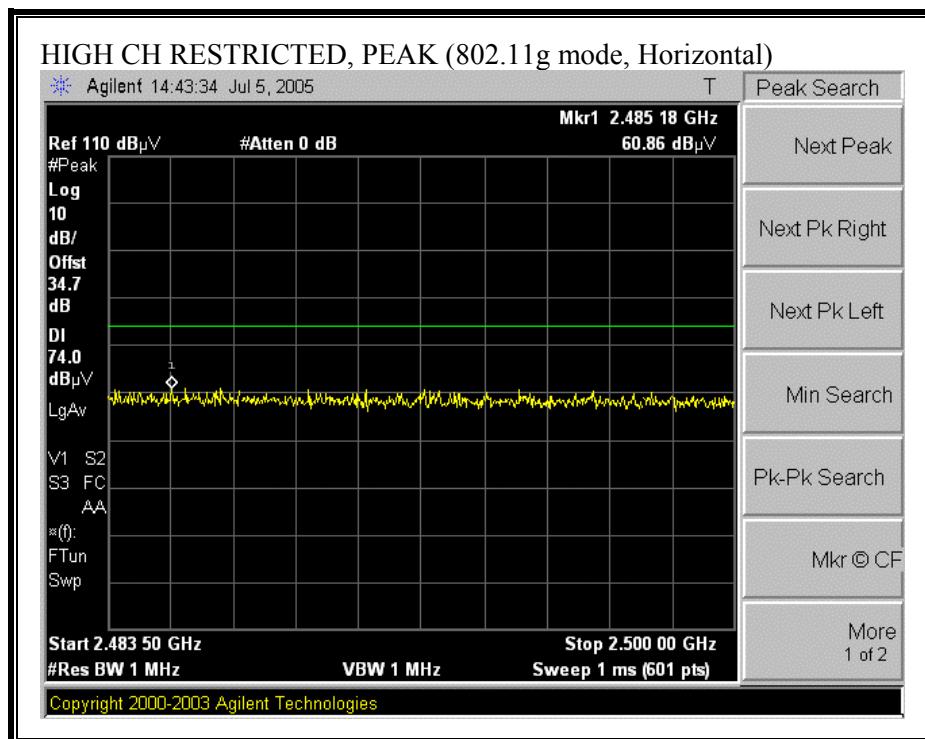

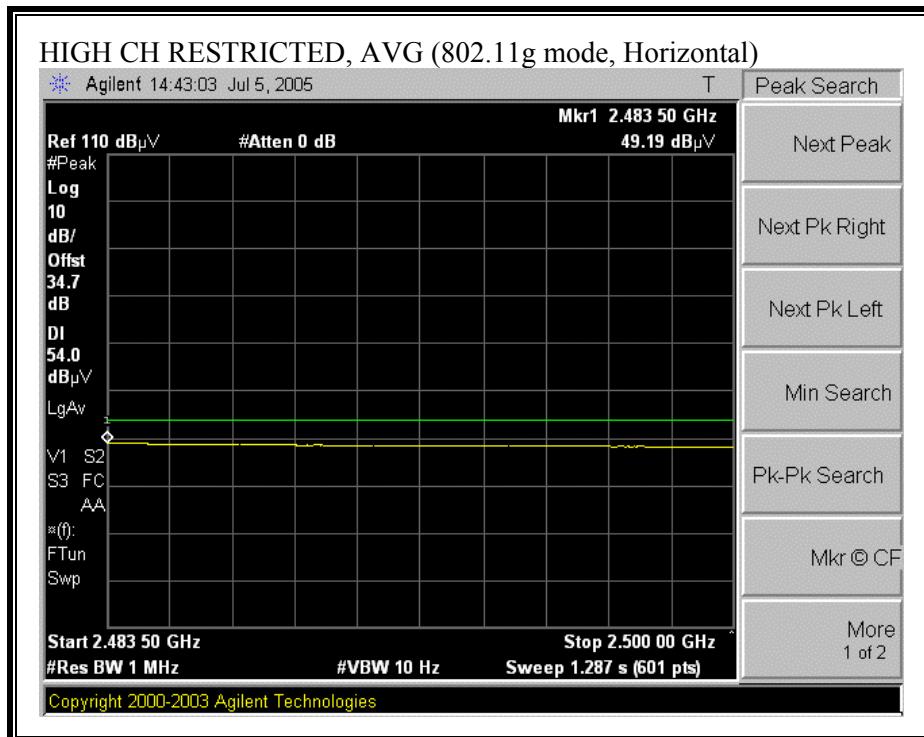


**RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)**

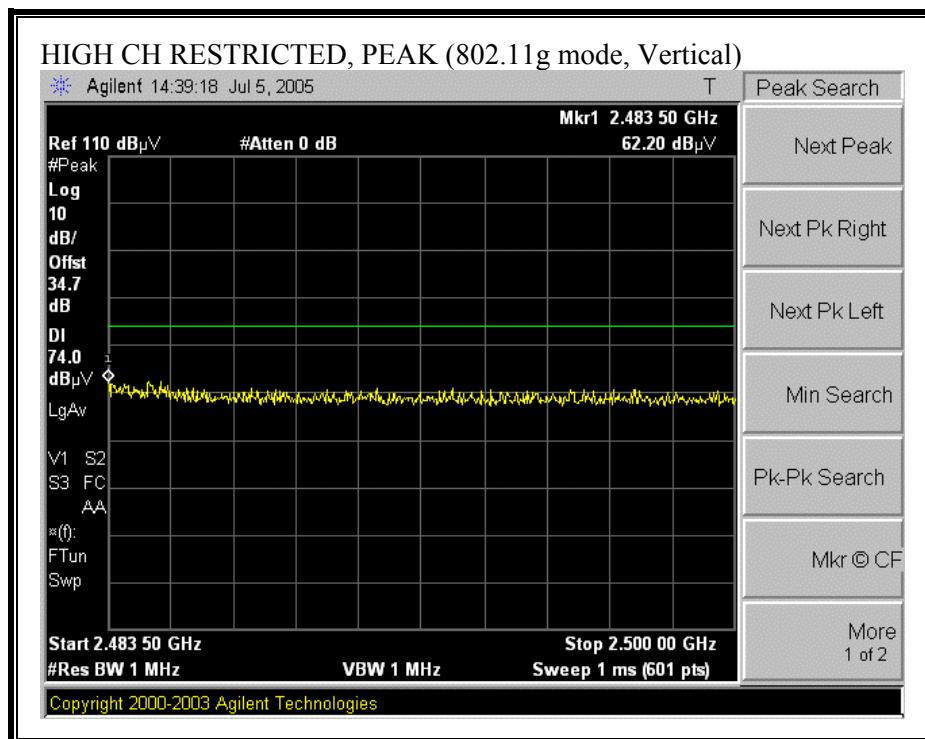

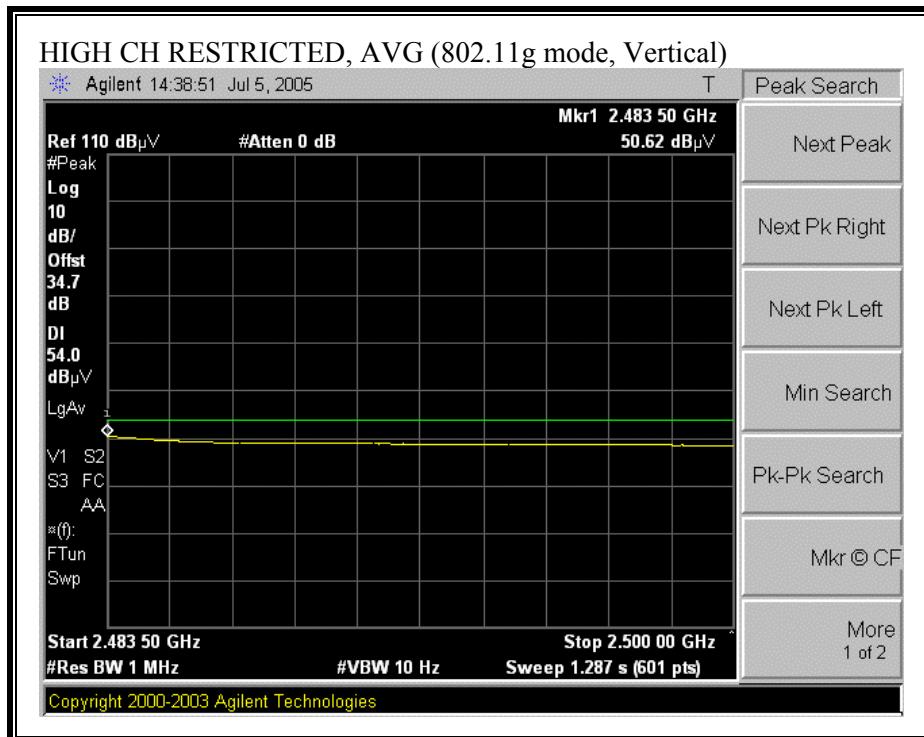

**HARMONICS AND SPURIOUS EMISSIONS (g MODE)**

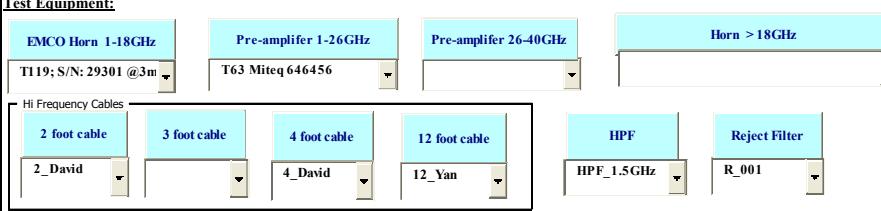07/05/05 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site																																																																																																																																																																																																	
<p>Test Engr: David Garcia  Project #: 05Uxxxx  Company: Microsoft  EUT Descrip.: X Box WLAN USB Interface  EUT M/N: OMNI  Test Target: FCC 15.205  Mode Oper: 11g Transmitting  Average Power Meter: Low = 11.6 dBm, Mid = 15.5 dBm, High = 11.2 dBm</p> <p>Test Equipment:</p>  <p>Peak Measurements RBW=VBW=1MHz</p> <p>Average Measurements RBW=1MHz, VBW=10Hz</p> <table border="1"> <thead> <tr> <th>f GHz</th> <th>Dist (m)</th> <th>Read Pk dBuV</th> <th>Read Avg. dBuV</th> <th>AF dB/m</th> <th>CL dB</th> <th>Amp dB</th> <th>D Corr dB</th> <th>Fltr dB</th> <th>Peak dBuV/m</th> <th>Avg dBuV/m</th> <th>Pk Lim dBuV/m</th> <th>Avg Lim dBuV/m</th> <th>Pk Mar dB</th> <th>Avg Mar dB</th> <th>Notes (V/H)</th> </tr> </thead> <tbody> <tr> <td colspan="14">2412 Channel</td> </tr> <tr> <td>4.824</td> <td>3.0</td> <td>46.3</td> <td>34.7</td> <td>34.0</td> <td>5.5</td> <td>-37.9</td> <td>0.0</td> <td>0.6</td> <td>48.5</td> <td>36.9</td> <td>74</td> <td>54</td> <td>-25.5</td> <td>-17.1</td> <td>V</td> </tr> <tr> <td>4.824</td> <td>3.0</td> <td>45.8</td> <td>34.0</td> <td>34.0</td> <td>5.5</td> <td>-37.9</td> <td>0.0</td> <td>0.6</td> <td>48.0</td> <td>36.2</td> <td>74</td> <td>54</td> <td>-26.0</td> <td>-17.8</td> <td>H</td> </tr> <tr> <td colspan="14">2437 Channel</td> </tr> <tr> <td>4.874</td> <td>3.0</td> <td>44.9</td> <td>33.5</td> <td>34.1</td> <td>5.5</td> <td>-37.9</td> <td>0.0</td> <td>0.6</td> <td>47.2</td> <td>35.8</td> <td>74</td> <td>54</td> <td>-26.8</td> <td>-18.2</td> <td>V</td> </tr> <tr> <td>4.874</td> <td>3.0</td> <td>44.4</td> <td>33.2</td> <td>34.1</td> <td>5.5</td> <td>-37.9</td> <td>0.0</td> <td>0.6</td> <td>46.7</td> <td>35.5</td> <td>74</td> <td>54</td> <td>-27.3</td> <td>-18.5</td> <td>H</td> </tr> <tr> <td colspan="14">2462 Channel</td> </tr> <tr> <td>4.924</td> <td>3.0</td> <td>45.3</td> <td>34.1</td> <td>34.1</td> <td>5.6</td> <td>-37.9</td> <td>0.0</td> <td>0.6</td> <td>47.6</td> <td>36.4</td> <td>74</td> <td>54</td> <td>-26.4</td> <td>-17.6</td> <td>V</td> </tr> <tr> <td>4.924</td> <td>3.0</td> <td>45.0</td> <td>33.4</td> <td>34.1</td> <td>5.6</td> <td>-37.9</td> <td>0.0</td> <td>0.6</td> <td>47.3</td> <td>35.7</td> <td>74</td> <td>54</td> <td>-26.7</td> <td>-18.3</td> <td>H</td> </tr> <tr> <td colspan="14">No further emissions were detected above the noise floor of the test receiver.</td> </tr> <tr> <td colspan="4"> f Measurement Frequency  Dist Distance to Antenna  Read Analyzer Reading  AF Antenna Factor  CL Cable Loss </td> <td colspan="4"> Amp Preamp Gain  D Corr Distance Correct to 3 meters  Avg Average Field Strength @ 3 m  Peak Calculated Peak Field Strength  HPF High Pass Filter </td> <td colspan="4"> Avg Lim Average Field Strength Limit  Pk Lim Peak Field Strength Limit  Avg Mar Margin vs. Average Limit  Pk Mar Margin vs. Peak Limit </td> </tr> </tbody> </table>														f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	2412 Channel														4.824	3.0	46.3	34.7	34.0	5.5	-37.9	0.0	0.6	48.5	36.9	74	54	-25.5	-17.1	V	4.824	3.0	45.8	34.0	34.0	5.5	-37.9	0.0	0.6	48.0	36.2	74	54	-26.0	-17.8	H	2437 Channel														4.874	3.0	44.9	33.5	34.1	5.5	-37.9	0.0	0.6	47.2	35.8	74	54	-26.8	-18.2	V	4.874	3.0	44.4	33.2	34.1	5.5	-37.9	0.0	0.6	46.7	35.5	74	54	-27.3	-18.5	H	2462 Channel														4.924	3.0	45.3	34.1	34.1	5.6	-37.9	0.0	0.6	47.6	36.4	74	54	-26.4	-17.6	V	4.924	3.0	45.0	33.4	34.1	5.6	-37.9	0.0	0.6	47.3	35.7	74	54	-26.7	-18.3	H	No further emissions were detected above the noise floor of the test receiver.														f Measurement Frequency Dist Distance to Antenna Read Analyzer Reading AF Antenna Factor CL Cable Loss				Amp Preamp Gain D Corr Distance Correct to 3 meters Avg Average Field Strength @ 3 m Peak Calculated Peak Field Strength HPF High Pass Filter				Avg Lim Average Field Strength Limit Pk Lim Peak Field Strength Limit Avg Mar Margin vs. Average Limit Pk Mar Margin vs. Peak Limit			
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)																																																																																																																																																																																		
2412 Channel																																																																																																																																																																																																	
4.824	3.0	46.3	34.7	34.0	5.5	-37.9	0.0	0.6	48.5	36.9	74	54	-25.5	-17.1	V																																																																																																																																																																																		
4.824	3.0	45.8	34.0	34.0	5.5	-37.9	0.0	0.6	48.0	36.2	74	54	-26.0	-17.8	H																																																																																																																																																																																		
2437 Channel																																																																																																																																																																																																	
4.874	3.0	44.9	33.5	34.1	5.5	-37.9	0.0	0.6	47.2	35.8	74	54	-26.8	-18.2	V																																																																																																																																																																																		
4.874	3.0	44.4	33.2	34.1	5.5	-37.9	0.0	0.6	46.7	35.5	74	54	-27.3	-18.5	H																																																																																																																																																																																		
2462 Channel																																																																																																																																																																																																	
4.924	3.0	45.3	34.1	34.1	5.6	-37.9	0.0	0.6	47.6	36.4	74	54	-26.4	-17.6	V																																																																																																																																																																																		
4.924	3.0	45.0	33.4	34.1	5.6	-37.9	0.0	0.6	47.3	35.7	74	54	-26.7	-18.3	H																																																																																																																																																																																		
No further emissions were detected above the noise floor of the test receiver.																																																																																																																																																																																																	
f Measurement Frequency Dist Distance to Antenna Read Analyzer Reading AF Antenna Factor CL Cable Loss				Amp Preamp Gain D Corr Distance Correct to 3 meters Avg Average Field Strength @ 3 m Peak Calculated Peak Field Strength HPF High Pass Filter				Avg Lim Average Field Strength Limit Pk Lim Peak Field Strength Limit Avg Mar Margin vs. Average Limit Pk Mar Margin vs. Peak Limit																																																																																																																																																																																									

### 7.3.3. TRANSMITTER ABOVE 1 GHz FOR 5725 TO 5850 MHz BAND

#### HARMONICS AND SPURIOUS EMISSIONS (802.11a MODE)

07/05/05 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site															
Test Engr:	David Garcia														
Project #:	05U3581-1														
Company:	Microsoft														
EUT Descrip.:	X Box WLAN USB Interface														
EUT M/N:	OMNI														
Test Target:	FCC 15.205														
Mode Oper:	11a, 5.8 GHz Band, Transmitting														
Average Power Meter:	Low = 11.6 dBm, Mid = 15.5 dBm, High = 11.2 dBm														
<b>Test Equipment:</b>															
EMCO Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz				Limit								
T119; S/N: 29301 @3m	T63 Miteq 646456						FCC 15.205								
Hi Frequency Cables															
2 foot cable	3 foot cable	4 foot cable	12 foot cable	HPF	Reject Filter	Peak Measurements RBW=VBW=1MHz									
2_David		4_David	12_Yan	HPF 1.5GHz	R_001	Average Measurements RBW=1MHz ; VBW=10Hz									
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
<b>5745 Channel</b>															
11.490	3.0	43.0	32.8	38.0	9.1	-37.2	0.0	0.8	53.7	43.5	74	54	-20.3	-10.5	V
11.490	3.0	42.8	32.4	38.0	9.1	-37.2	0.0	0.8	53.5	43.1	74	54	20.5	10.9	H
<b>5785 Channel</b>															
11.570	3.0	43.0	33.0	38.0	9.2	-37.2	0.0	0.8	53.7	43.7	74	54	-20.3	-10.3	V
4.874	3.0	42.9	32.9	34.1	5.5	-37.9	0.0	0.6	45.2	35.2	74	54	-26.8	-18.8	H
<b>5825 Channel</b>															
4.924	3.0	42.8	32.3	34.1	5.6	-37.9	0.0	0.6	45.1	34.6	74	54	-26.9	-19.4	V
4.924	3.0	42.6	32.0	34.1	5.6	-37.9	0.0	0.6	44.9	34.3	74	54	-29.1	-19.7	H
Note: There were no other emission found above the system noise floor															
f	Measurement Frequency			Amp	Preamp Gain			Avg Lim			Average Field Strength Limit				
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters			Pk Lim			Peak Field Strength Limit				
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m			Avg Mar			Margin vs. Average Limit				
AF	Antenna Factor			Peak	Calculated Peak Field Strength			Pk Mar			Margin vs. Peak Limit				
CL	Cable Loss			HPF	High Pass Filter										

### 7.3.4. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz


#### SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

##### HORIZONTAL PLOT



561F Monterey Road  
Morgan Hill, CA 95037  
Tel: (408) 463-0888  
Fax: (408) 463-0885

Data#: 2 File#: OMNI.EMI Date: 07-06-2005 Time: 14:18:54

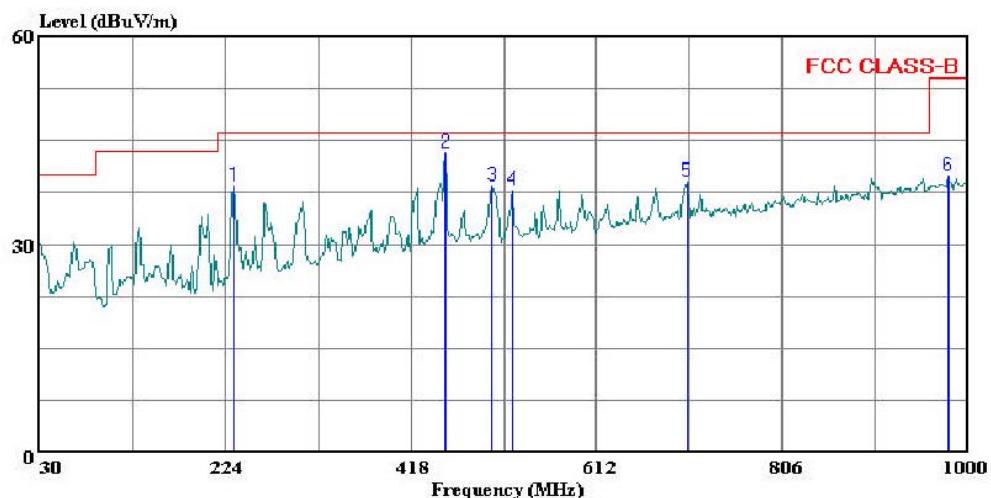

Condition: FCC CLASS-B HORIZONTAL  
Test Operator: : David Garcia/Joseph Chung  
Project #: : 05xxxx  
Company: : Microsoft  
EUT: : 802.11 a/b/g USB 2.0 Network Module  
Model No. : OMNI  
Configuration : EUT/Laptop  
Target of Test : FCC Class B  
Mode of Operation: TX on, Mid ch., 11b worst case

HORIZONTAL DATA

Freq	MHz	Read		Limit	Over	Limit	Remark
		Level	Factor				
				dBuV/m	dBuV/m		
1	232.730	25.16	13.17	38.33	46.00	-7.67	Peak
2	453.890	23.88	19.28	43.16	46.00	-2.84	Peak
3	502.390	18.12	20.24	38.36	46.00	-7.64	Peak
4	523.730	17.21	20.62	37.83	46.00	-8.17	Peak
5	706.090	15.93	23.17	39.10	46.00	-6.90	Peak
6	979.630	13.04	26.74	39.78	54.00	-14.22	Peak


**SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)**

VERTICAL PLOT



561F Monterey Road  
Morgan Hill, CA 95037  
Tel: (408) 463-0888  
Fax: (408) 463-0885

Data#: 4 File#: OMNI.EMI Date: 07-06-2005 Time: 14:28:03

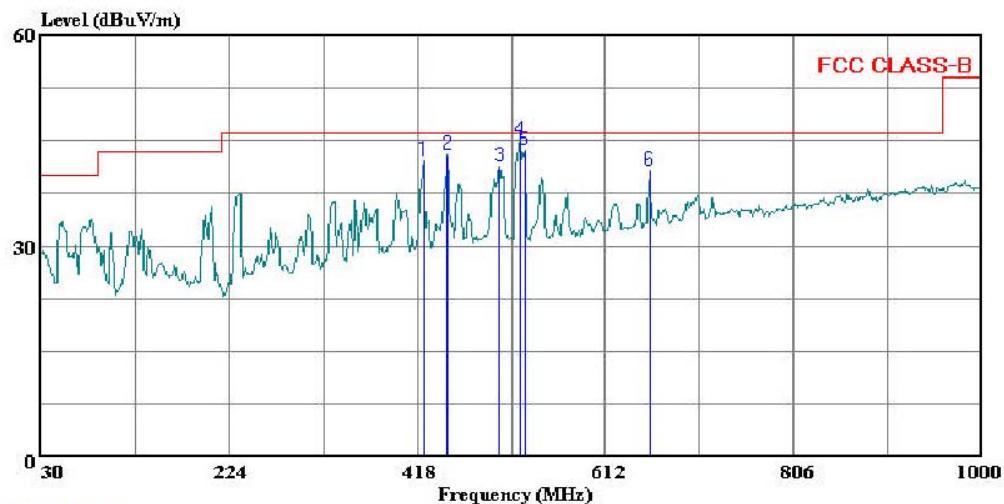

(Audix ATC)

Trace: 3

Ref Trace:

Condition: FCC CLASS-B VERTICAL  
Test Operator: : David Garcia/Joseph Chung  
Project #: : 05xxxx  
Company: : Microsoft  
EUT: : 802.11 a/b/g USB 2.0 Network Module  
Model No.: : OMNI  
Configuration : EUT/Laptop  
Target of Test : FCC Class B  
Mode of Operation: Tx on, Mid ch., 11b worst case

VERTICAL DATA

Freq	MHz	Read		Limit	Over	Limit	Remark
		Level	Factor				
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	424.790	23.59	18.64	42.23	46.00	-3.77	Peak
2	449.040	23.84	19.17	43.01	46.00	-2.99	Peak
3	502.390	21.16	20.24	41.40	46.00	-4.60	Peak
4	523.730	24.35	20.62	44.97	46.00	-1.03	Peak
5	528.580	23.05	20.63	43.68	46.00	-2.32	Peak
6	657.590	18.22	22.46	40.68	46.00	-5.32	Peak

## 7.4. POWERLINE CONDUCTED EMISSIONS

### LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 <sup>*</sup>	56 to 46 <sup>*</sup>
0.5-5	56	46
5-30	60	50

<sup>\*</sup> Decreases with the logarithm of the frequency.

### TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.


### RESULTS

No non-compliance noted:

**6 WORST EMISSIONS**

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq. (MHz)	Reading			Closs (dB)	Limit QP	EN B AV	Margin		Remark
	PK (dBuV)	QP (dBuV)	AV (dBuV)				QP (dB)	AV (dB)	
0.15	59.62	--	41.55	0.00	66.00	56.00	-6.38	-14.45	L1
0.29	46.31	--	39.11	0.00	60.44	50.44	-14.13	-11.33	L1
1.99	32.80	--	30.88	0.00	56.00	46.00	-23.20	-15.12	L1
0.15	59.17	--	38.42	0.00	65.94	55.94	-6.77	-17.52	L2
0.29	51.40	--	40.76	0.00	60.41	50.41	-9.01	-9.65	L2
29.22	30.38	--	20.14	0.00	60.00	50.00	-29.62	-29.86	L2
6 Worst Data									

**LINE 1 RESULTS**

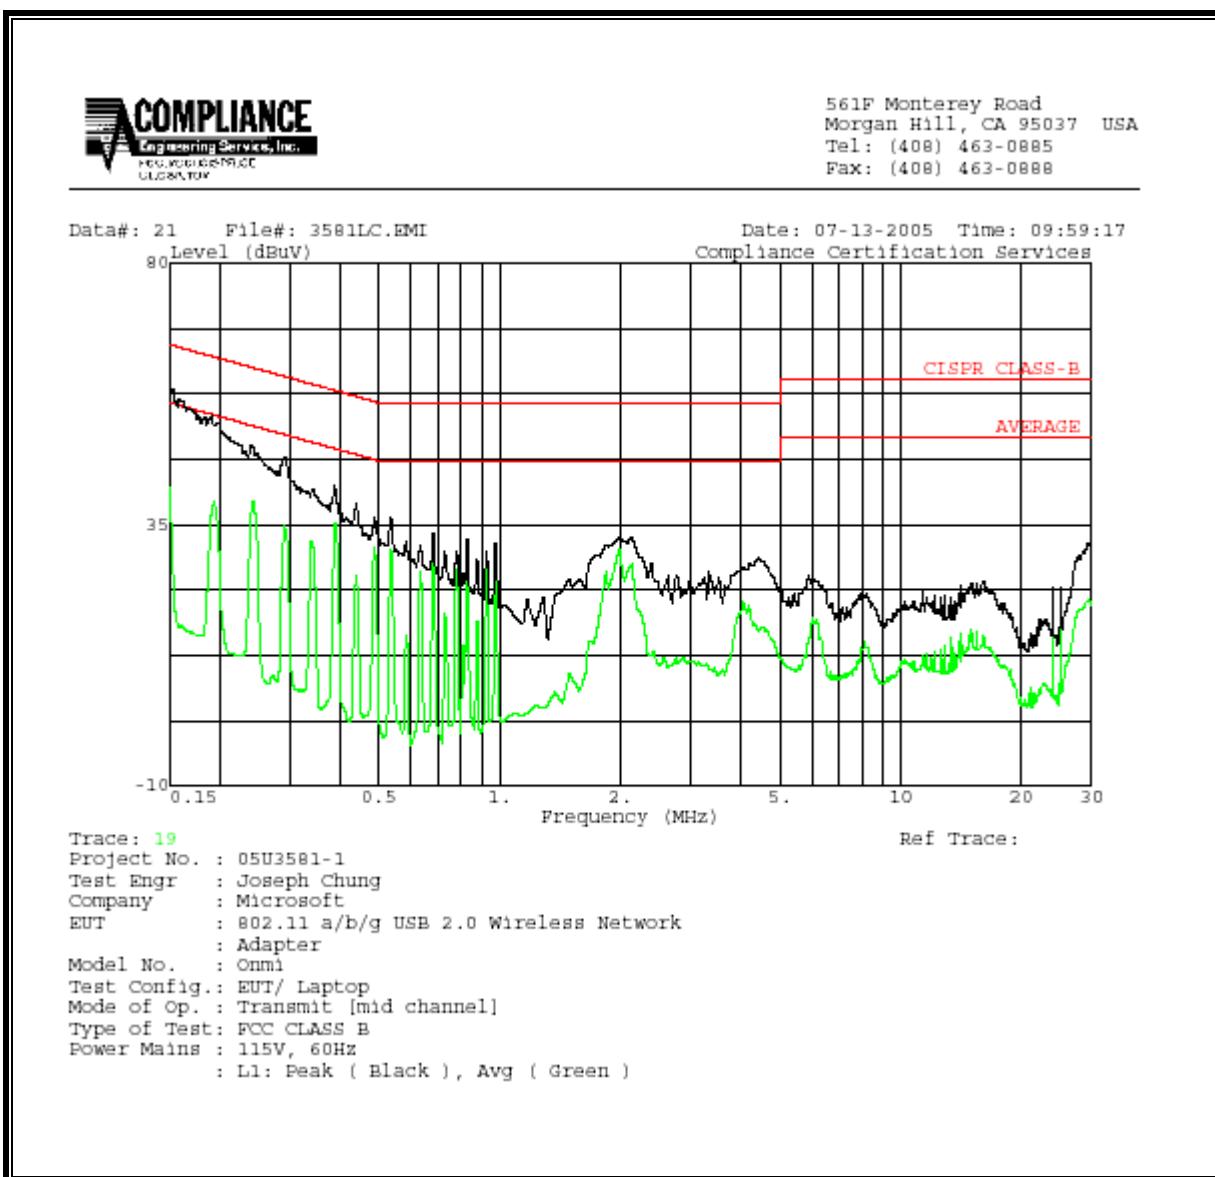

**LINE 2 RESULTS**

