



**FCC CFR47 PART 15 SUBPART E
CERTIFICATION
TEST REPORT
FOR**

WIRELESS NETWORKING ADAPTER

MODEL NUMBER: XBOX 360 WIRELESS NETWORKING ADAPTER

FCCID: C3K-WKS168

REPORT NUMBER: 05U3581-2

ISSUE DATE: JULY 15, 2005

Prepared for
MICROSOFT CORPORATION
ONE MICROSOFT WAY
REDMOND, WA 98052-3699
U.S.A.

Prepared by
COMPLIANCE ENGINEERING SERVICES, INC.
d.b.a.
COMPLIANCE CERTIFICATION SERVICES
561F MONTEREY ROAD,
MORGAN HILL, CA 95037, USA
TEL: (408) 463-0885
FAX: (408) 463-0888

NVLAP[®]
LAB CODE:200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
A		Initial Issue	YZ
A.1	<u>07/20</u>	<ul style="list-style-type: none">• Additional antenna gain info in section 5.3• Confirm FCC ID number , Model Name and Product Description• Added software setting in section 7.1.4 average output power	MK
A.2	<u>07/21</u>	<ul style="list-style-type: none">• Disclose internal antenna info in section 5.3	MK

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY.....	5
4.1. <i>MEASURING INSTRUMENT CALIBRATION.....</i>	5
4.2. <i>MEASUREMENT UNCERTAINTY.....</i>	5
5. EQUIPMENT UNDER TEST.....	6
5.1. <i>DESCRIPTION OF EUT</i>	6
5.2. <i>MAXIMUM OUTPUT POWER</i>	6
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	6
5.4. <i>SOFTWARE AND FIRMWARE</i>	7
5.5. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	7
<i>DESCRIPTION OF TEST SETUP</i>	8
6. TEST AND MEASUREMENT EQUIPMENT	10
7. LIMITS AND RESULTS	11
7.1. <i>CHANNEL TESTS FOR THE 5150 TO 5350 MHz BAND</i>	11
7.1.1. EMISSION BANDWIDTH	11
7.1.2. PEAK POWER	15
7.1.3. MAXIMUM PERMISSIBLE EXPOSURE.....	20
7.1.4. AVERAGE POWER.....	23
7.1.5. PEAK POWER SPECTRAL DENSITY	24
7.1.6. PEAK EXCURSION	29
7.1.7. CONDUCTED SPURIOUS EMISSIONS.....	33
7.2. <i>RADIATED EMISSIONS.....</i>	37
7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS	37
7.2.2. TRANSMITTER ABOVE 1 GHZ FOR 5150 TO 5350 MHz BAND	40
7.2.3. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz	49
7.3. <i>POWERLINE CONDUCTED EMISSIONS</i>	53
8. SETUP PHOTOS	57

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: MICROSOFT CORPORATION
ONE MICROSOFT WAY
REDMOND, WA 98052-6399

EUT DESCRIPTION: Wireless Networking Adapter

MODEL: Xbox 360 Wireless Networking Adapter

SERIAL NUMBER: 000D3A7ADE40

DATE TESTED: JULY 05-08, 2005

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART E	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:



YANG ZHENG
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES

Tested By:



DAVID GARCIAS
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT is a USB 2.0 to Wireless Adapter to connect the Microsoft gaming console wirelessly to the internet or home network. This allows users to utilize their existing home 802.11a, 802.11b or 802.11g wireless network, managed by a wireless Access Point. It also can operate in a peer to peer mode with another wireless enabled gaming console.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

5150 to 5250 MHz Authorized Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5180 - 5250	802.11a	13.94	24.77

5250 to 5350 MHz Authorized Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5250 - 5320	802.11a	17.06	50.82

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio is equipped with two antennas. One is external Omni-directional antenna with IPEX MHF connector for TX/RX diversity. The other antenna is internal PIFA PCB antenna. Internal antenna is disabled by firmware at factory.

The peak antenna gains in various bands for external Omni-directional antenna are:

Frequency (MHz)	Peak Gain in dBi (with console)
2400	4.1
2450	3.8
2500	2.9
4900	2.6
5000	3.0
5150	2.1
5250	2.6
5350	2.7
5750	3.0

5.4. SOFTWARE AND FIRMWARE

The test utility software used during testing was DutApiClass, version 1.1.3.01

5.5. WORST-CASE CONFIGURATION AND MODE

The worst-case channel is determined as the channel with the highest output power. The highest measured output power was at 5260 MHz.

The worst-case data rate for this channel is determined to be 6 Mb/s.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Toshiba	Tecra 8100	S Z0161557U	DoC
AC Adapter	NEC	ADP57	9701608DE	DoC


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	US 115V	Un-shielded	2m	No
2	DC	1	DC	Un-shielded	1m	No
3	USB	1	USB	Un-shielded	2m	Yes

TEST SETUP

The EUT is connected to a host laptop computer via USB cable during the tests. Test software exercised the radio card.

SETUP DIAGRAM FOR TESTS

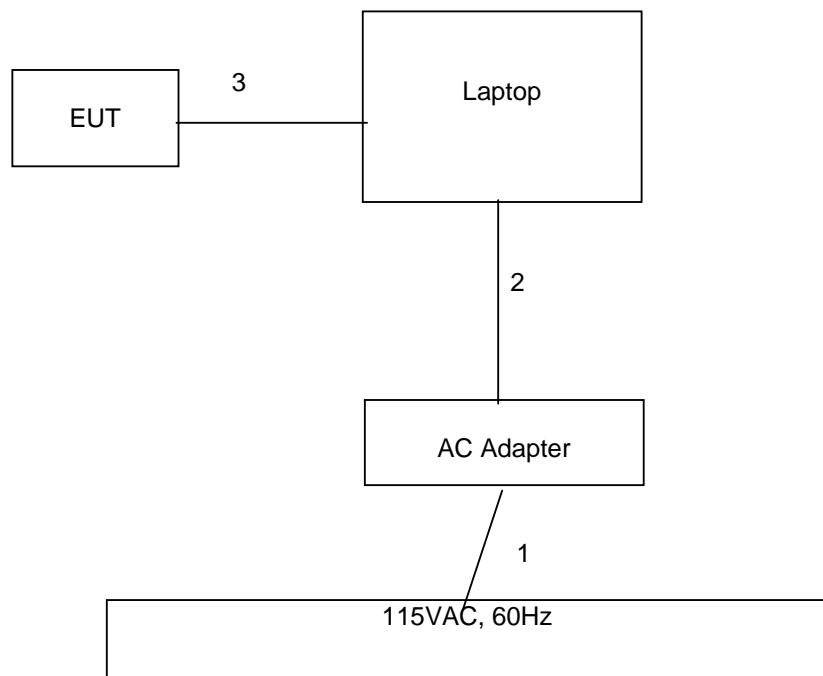

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
EMI Test Receiver	R & S	ESHS 20	827129/006	10/22/2005
Site A Line Stabilizer / Conditioner	Tripplite	LC-1800a	A0051681	CNR
LISN, 10 kHz ~ 30 MHz	FCC	LISN-50/250-25-2	2023	8/30/2005
LISN, 10 kHz ~ 30 MHz	Solar	8012-50-R-24-BNC	8379443	10/21/2005
Spectrum Analyzer	Agilent	E4446A	US42510266	8/25/2005
Antenna, Horn 1 ~ 18 GHz	EMCO	3117	29310	9/12/2005
Preamplifier, 1 ~ 26.5 GHz	HP	8449B	3008A00369	8/17/2005
Peak Power Meter	Agilent	E4416A	GB41291160	2/9/2006
Peak / Average Power Sensor	Agilent	E9327A	US40440755	2/10/2006
RF Filter Section	HP	85420E	3705A00256	3/6/2006
EMI Receiver, 9 kHz ~ 2.9 GHz	HP	8542E	3942A00286	3/6/2006
30MHz---- 2Ghz	Sunol Sciences	JB1 Antenna	A121003	38607
4.0 High Pass Filter	Micro Tronics	HPM13351	3	CNR
7.6GHz HPF	Micro Tronics	HPM13195	1	CNR
Antenna, Horn 18 ~ 26 GHz	ARA	MWH-1826/B	1049	38607
Antenna, Horn 26 ~ 40 GHz	ARA	MWH-2640/B	1029	38715
PreAmplifier 26-40 GHz	Miteq	NSP4000-SP2	924343	38877

7. LIMITS AND RESULTS

7.1. CHANNEL TESTS FOR THE 5150 TO 5350 MHz BAND

7.1.1. EMISSION BANDWIDTH

LIMIT

§15.403 (i) Emission bandwidth. For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolutions bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 1% to 3% of the 26 dB bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled.


RESULTS


No non-compliance noted:


802.11a Mode

Channel	Frequency (MHz)	B (MHz)	10 Log B (dB)
Low	5180	21.91	13.41
Middle	5260	25.06	13.99
High	5320	21.63	13.35

26 dB EMISSION BANDWIDTH (802.11a MODE)

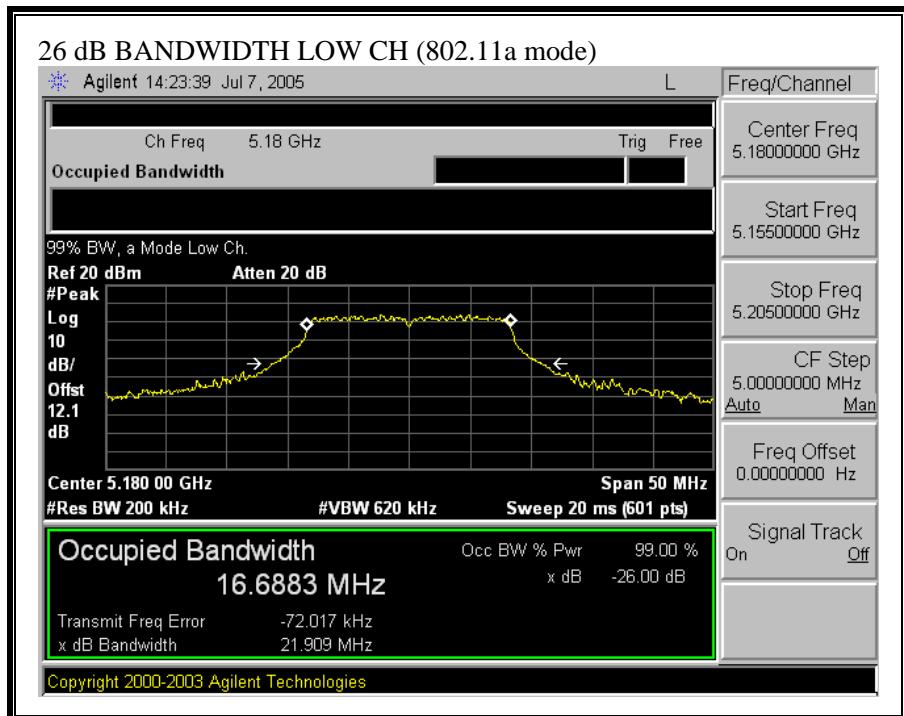

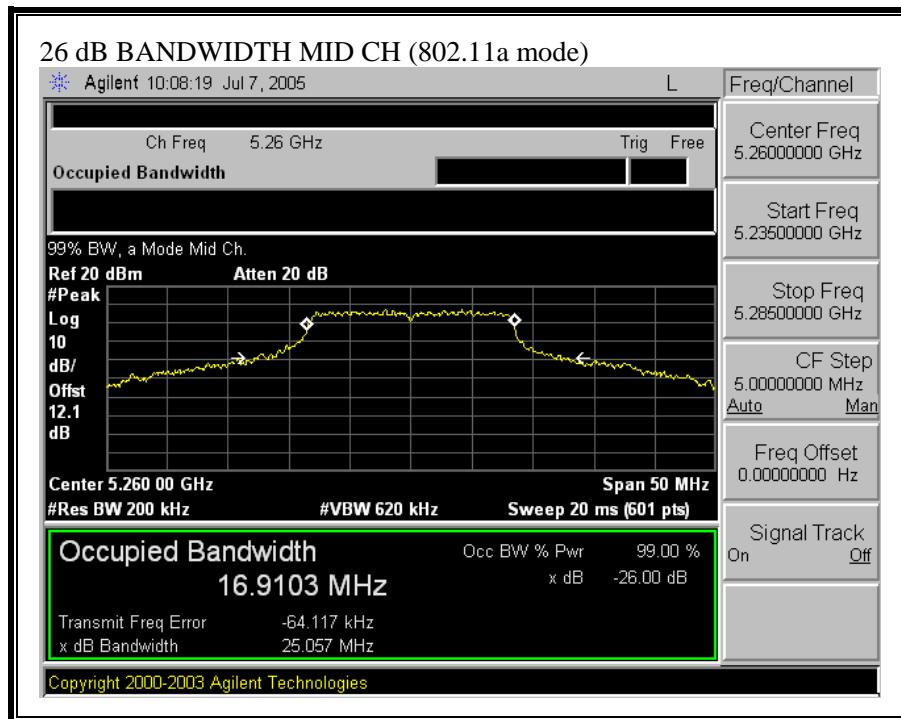

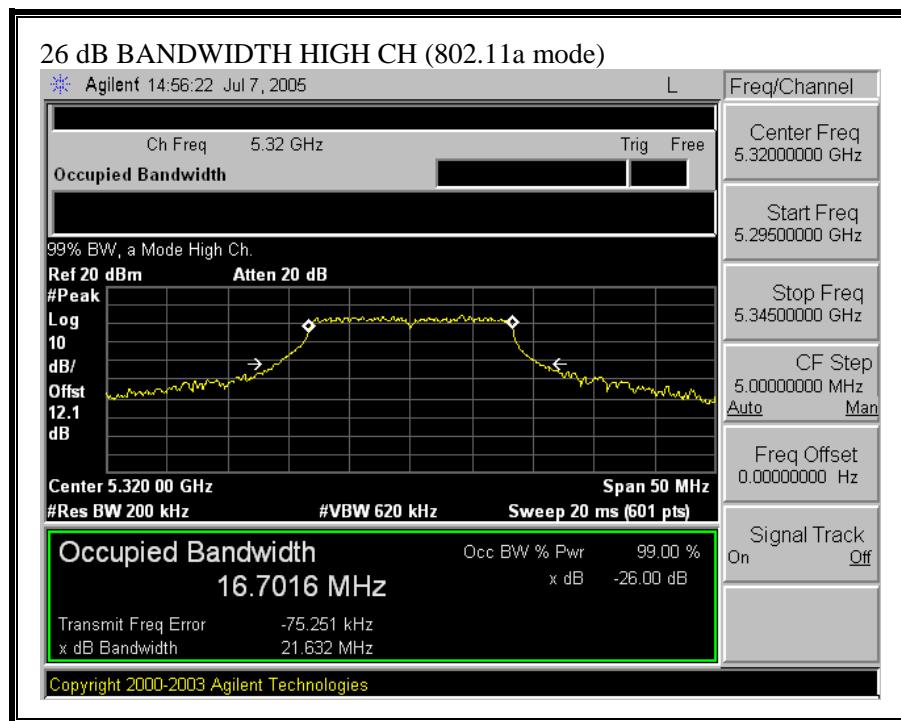

7.1.2. PEAK POWER

LIMIT

§15.407 (a) (1) For the band 5.15-5.25 GHz, the peak transmit power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

§15.407 (a) (1) For the band 5.25-5.35 GHz, the peak transmit power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.

The transmitter output operates continuously therefore Method # 1 is used.

LIMITS AND RESULTS

No non-compliance noted:

Limit in 5150 to 5250 MHz Band

Channel	Frequency (MHz)	Fixed Limit (dBm)	B (MHz)	4 + 10 Log B Limit (dBm)	Antenna Gain (dBi)	Limit (dBm)
Low	5180	17	21.91	17.41	2.60	17.00


Limit in 5250 to 5350 MHz Band


Channel	Frequency (MHz)	Fixed Limit (dBm)	B (MHz)	11 + 10 Log B Limit (dBm)	Antenna Gain (dBi)	Limit (dBm)
Mid	5260	24	25.06	24.99	2.60	24.00
High	5320	24	21.63	24.35	2.60	24.00


Results

Channel	Frequency (MHz)	Power (dBm)	Limit (dBm)	Margin (dB)
Low	5180	13.94	17.00	-3.06
Mid	5260	17.06	24.00	-6.94
High	5320	14.44	24.00	-9.56

PEAK POWER (NORMAL MODE)

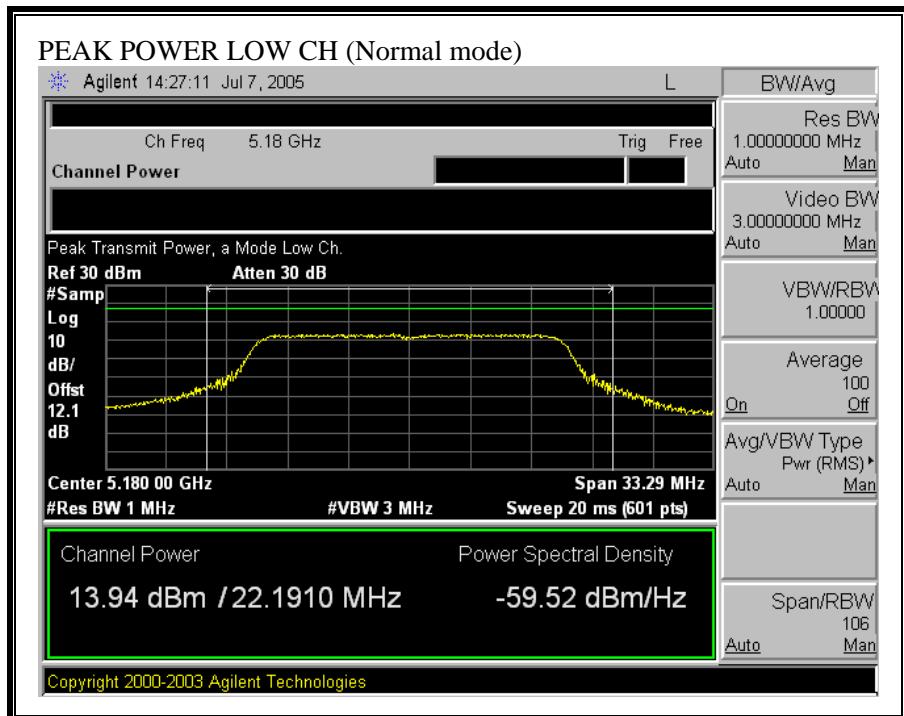

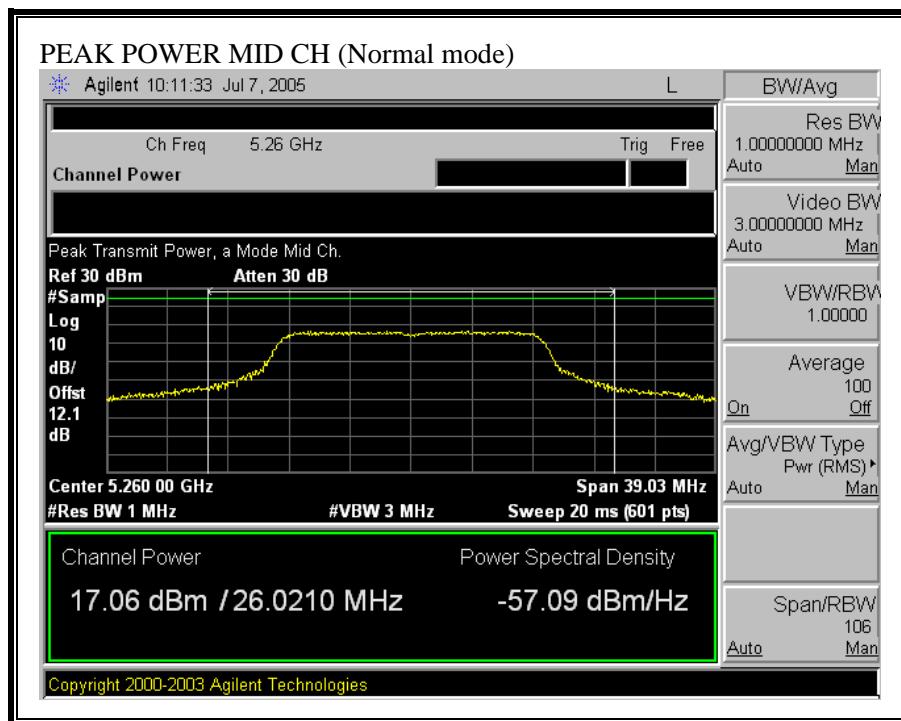

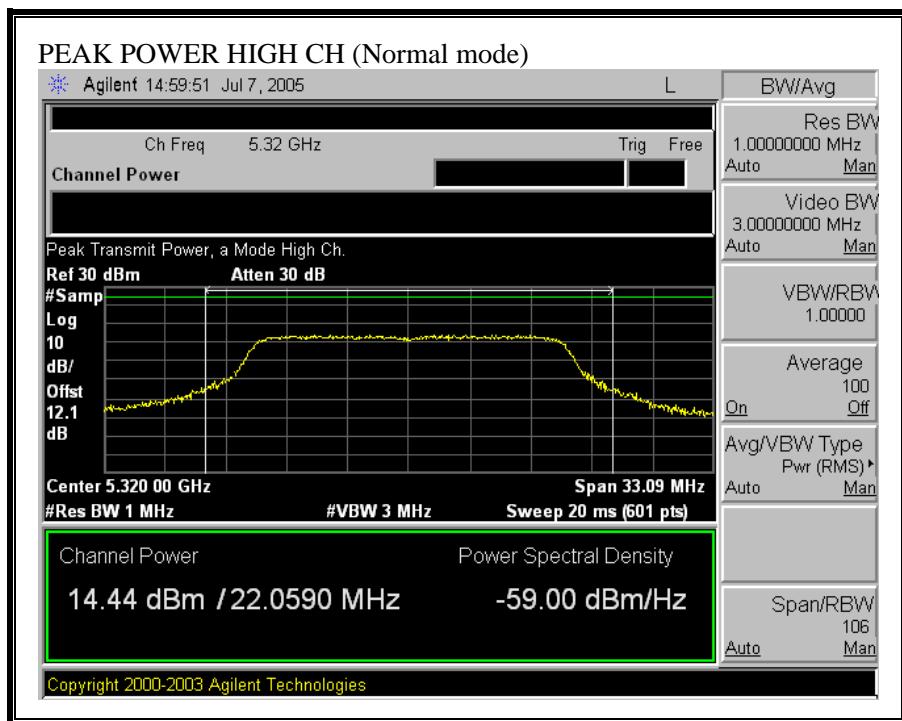

7.1.3. MAXIMUM PERMISSIBLE EXPOSURE

LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500			f/300	6
1500–100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500			f/1500	30
1500–100,000			1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

CALCULATIONS

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations and rearranging the terms to express the distance as a function of the remaining variables yields:

$$d = \sqrt{(30 * P * G) / (3770 * S)}$$

Changing to units of Power to mW and Distance to cm, using:

$$P (\text{mW}) = P (\text{W}) / 1000 \text{ and}$$

$$d (\text{cm}) = 100 * d (\text{m})$$

yields

$$d = 100 * \sqrt{(30 * (P / 1000) * G) / (3770 * S)}$$

$$d = 0.282 * \sqrt{(P * G / S)}$$

where

d = distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power Density in mW/cm²

Substituting the logarithmic form of power and gain using:

$$P (\text{mW}) = 10^{\text{P} (\text{dBm}) / 10} \text{ and}$$

$$G (\text{numeric}) = 10^{\text{G} (\text{dBi}) / 10}$$

yields

$$d = 0.282 * 10^{\text{(P + G) / 20}} / \sqrt{S}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm²

Rearranging terms to calculate the power density at a specific distance yields

$$S = 0.0795 * 10^{\text{(P + G) / 10}} / (d^2) \quad \text{Equation (1)}$$

LIMITS

From §1.1310 Table 1 (B), the maximum S = 1.0 mW/cm²

RESULTS

No non-compliance noted:

Mode	MPE Distance (cm)	Output Power (dBm)	Antenna Gain (dBi)	Power Density (mW/cm ²)
802.11a	20.0	17.06	2.60	0.02

NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.

7.1.4. AVERAGE POWER

AVERAGE POWER LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

No non-compliance noted:

The cable assembly insertion loss of 12.1dB (including 10 dB pad and 2.1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

MODE / CHANNEL	TARGET AVERAGE POWER (dBm)	MEASURED AVERAGE POWER (dBm)	TEST UTILITY S/W SETTINGS
a mode 5180	14	13.8	16
a mode 5260	17	16.8	19
a mode 5320	14	14.1	17

7.1.5. PEAK POWER SPECTRAL DENSITY

LIMIT

§15.407 (a) (1) For the band 5.15-5.25 GHz, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

§15.407 (a) (1) For the band 5.25-5.35 GHz, the peak power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The maximum antenna gain is less than 6dBi, therefore there is no reduction due to antenna gain.

TEST PROCEDURE

The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002. PPSD method #2 was used.


RESULTS


No non-compliance noted:


802.11a Mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	5180	3.40	4.00	-0.60
Mid	5260	6.33	11.00	-4.67
High	5320	3.89	11.00	-7.11

PEAK POWER SPECTRAL DENSITY (802.11a MODE)

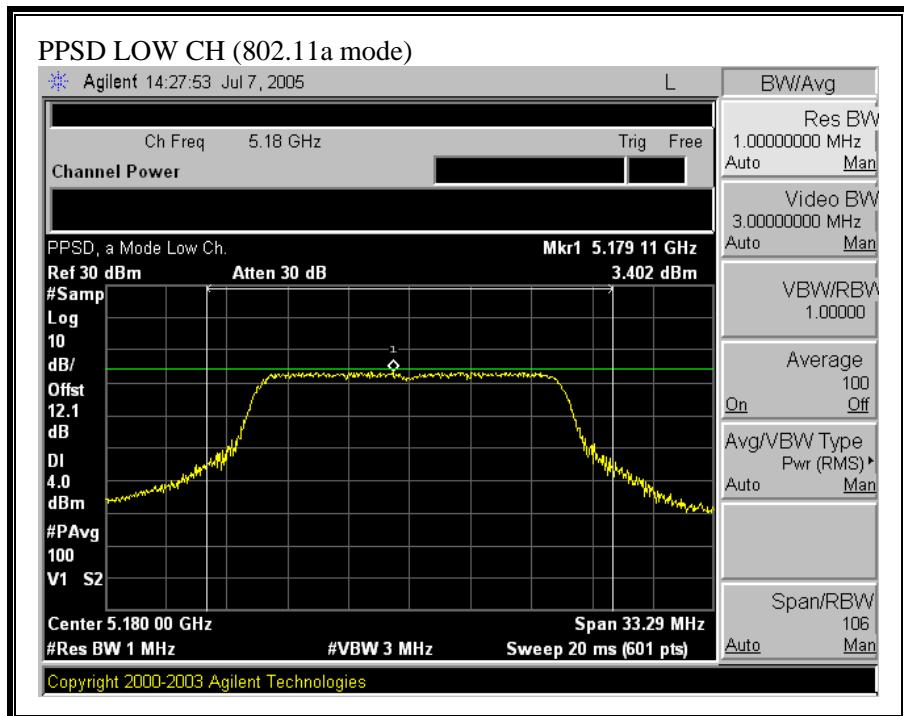

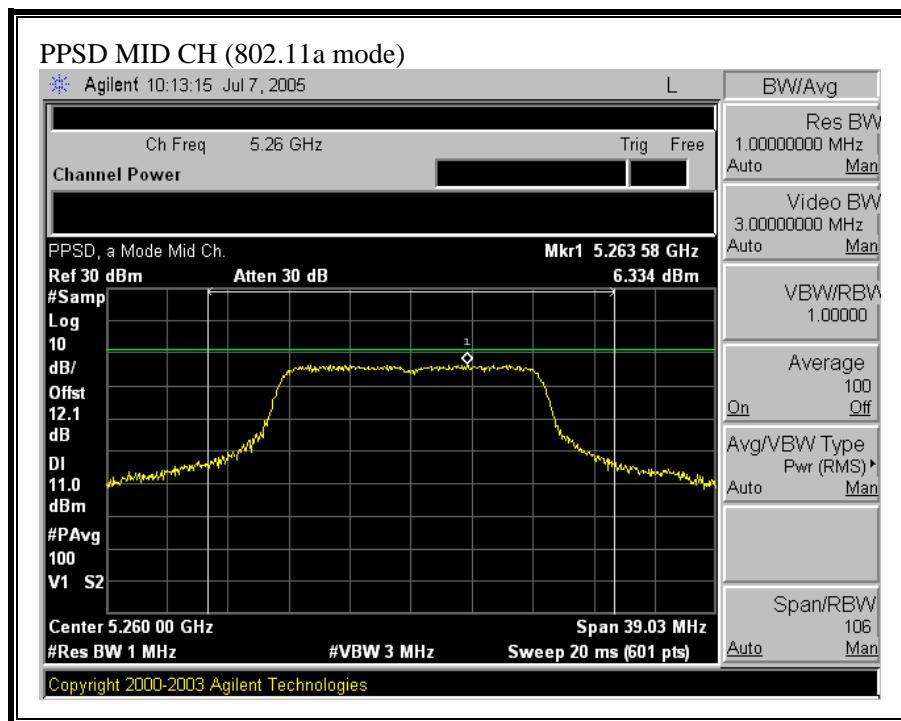

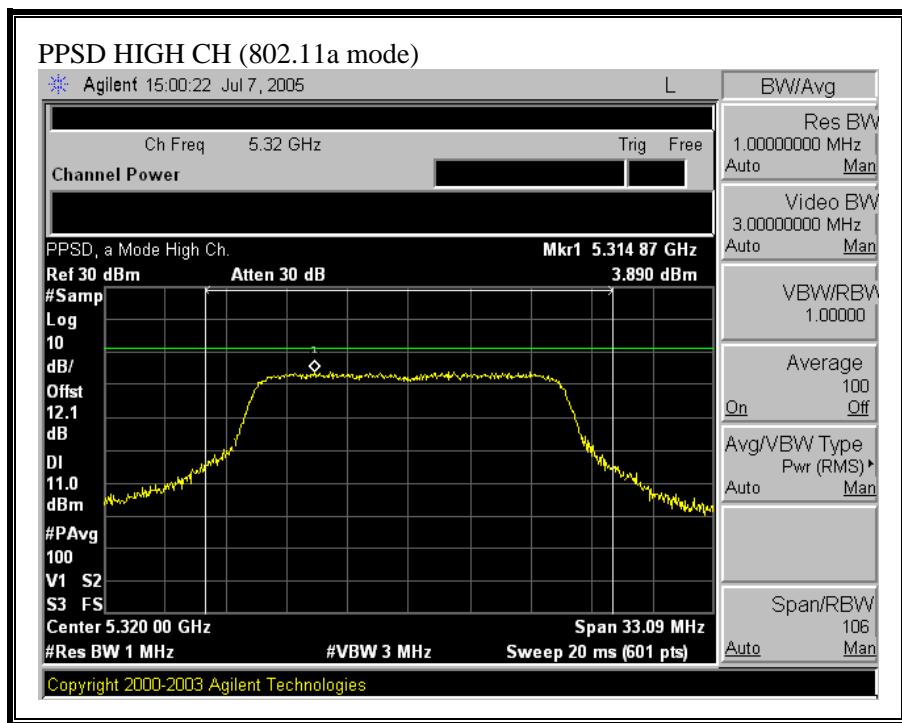

7.1.6. PEAK EXCURSION

LIMIT

§15.407 (a) (6) The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

TEST PROCEDURE

The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.

Since Method # 1 was used for peak power measurements, Method # 1 settings are used for the second PPSD trace.


RESULTS


No non-compliance noted:


802.11a Mode

Channel	Frequency (MHz)	Peak Excursion (dB)	Limit (dB)	Margin (dB)
Low	5180	8.10	13	-4.90
Middle	5200	8.01	13	-4.99
High	5240	8.70	13	-4.30

PEAK EXCURSION (802.11a MODE)

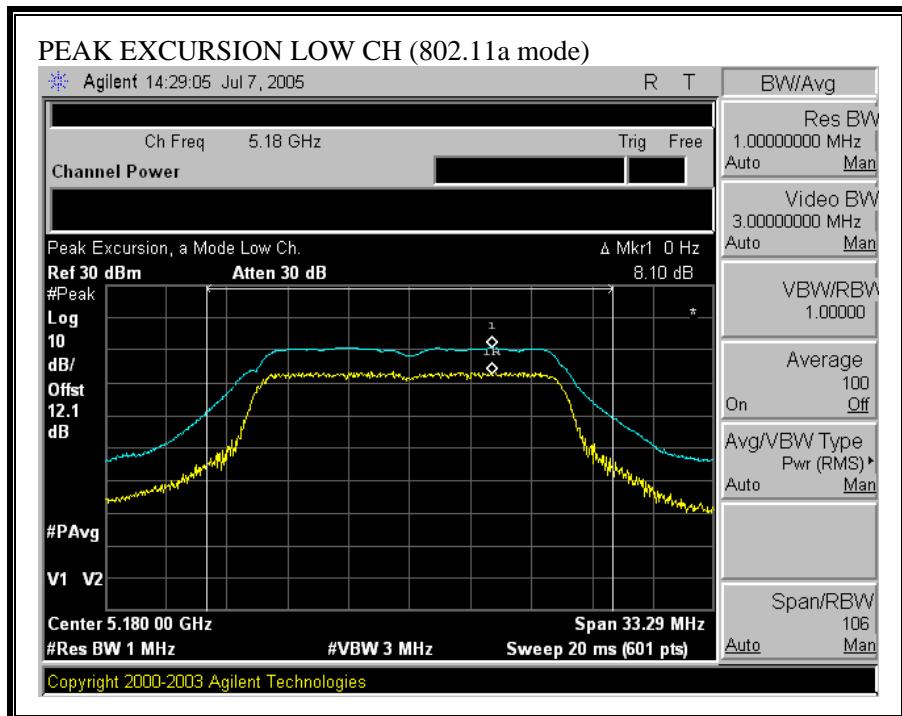

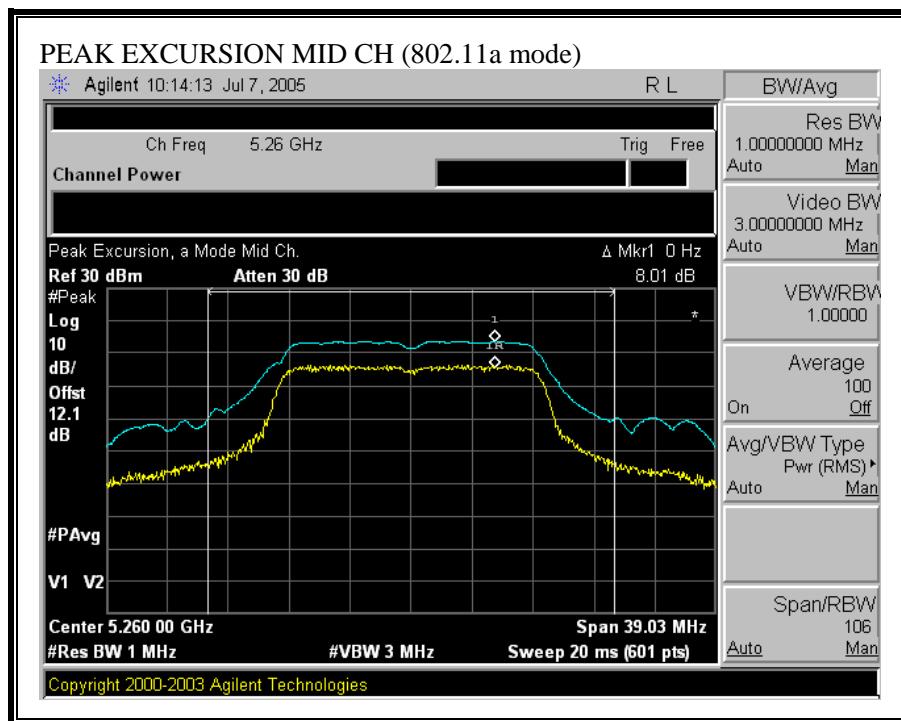

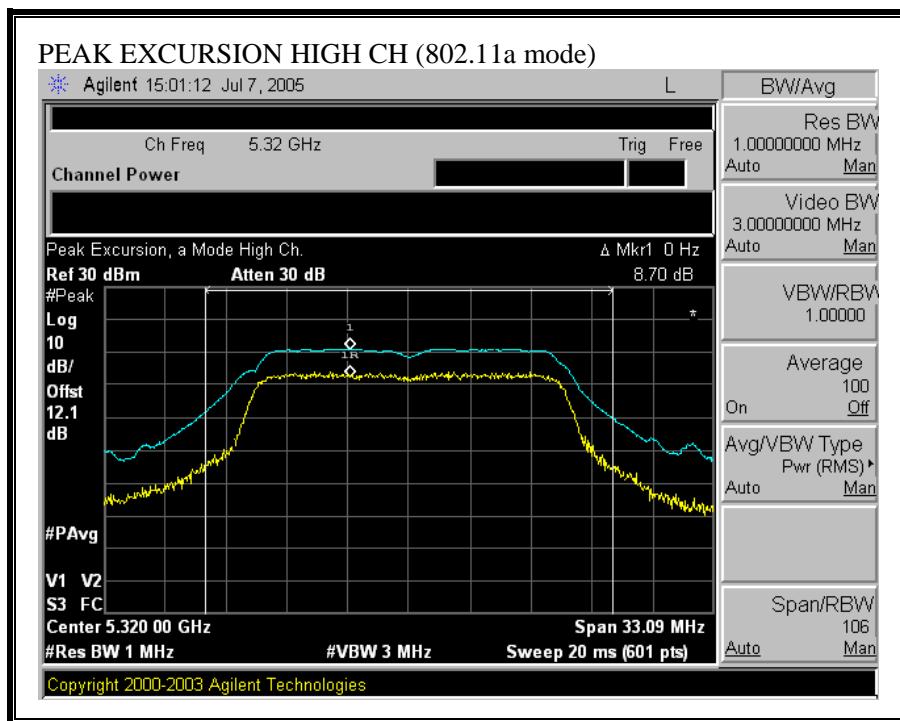

7.1.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

§15.407 (b) (1 & 2) For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm / MHz.

TEST PROCEDURE

Conducted RF measurements of the transmitter output are made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.


The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 1 MHz. The video bandwidth is set to 1 MHz. Peak detection measurements are compared to the average EIRP limit, adjusted for the maximum antenna gain. If necessary, additional average detection measurements are made.


Measurements are made over the 30 MHz to 40 GHz range with the transmitter set to the lowest, middle, and highest channels.


RESULTS

No non-compliance noted:

SPURIOUS EMISSIONS (802.11a MODE)

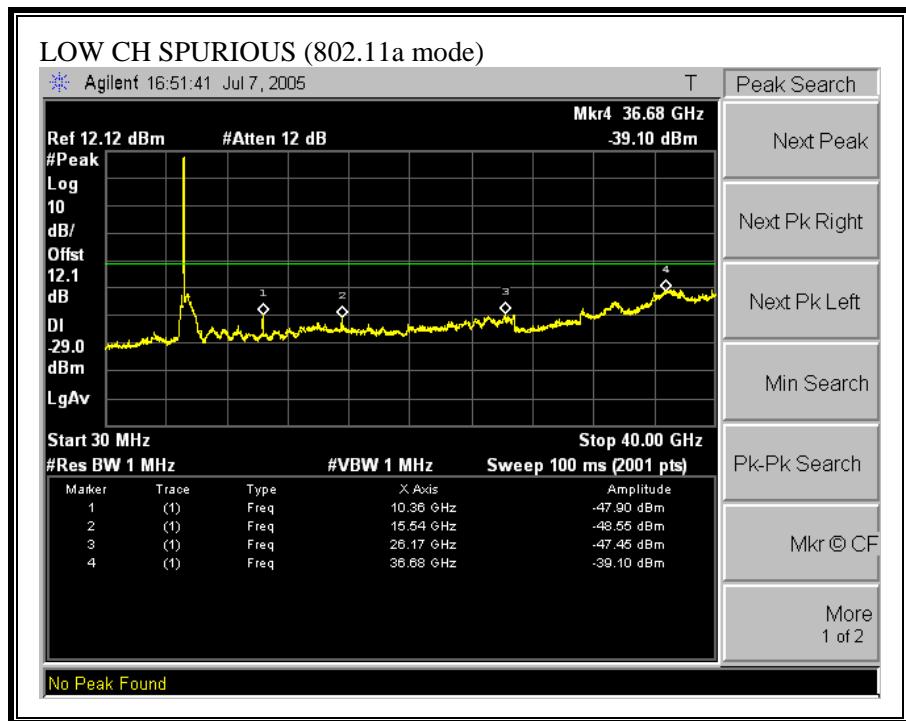

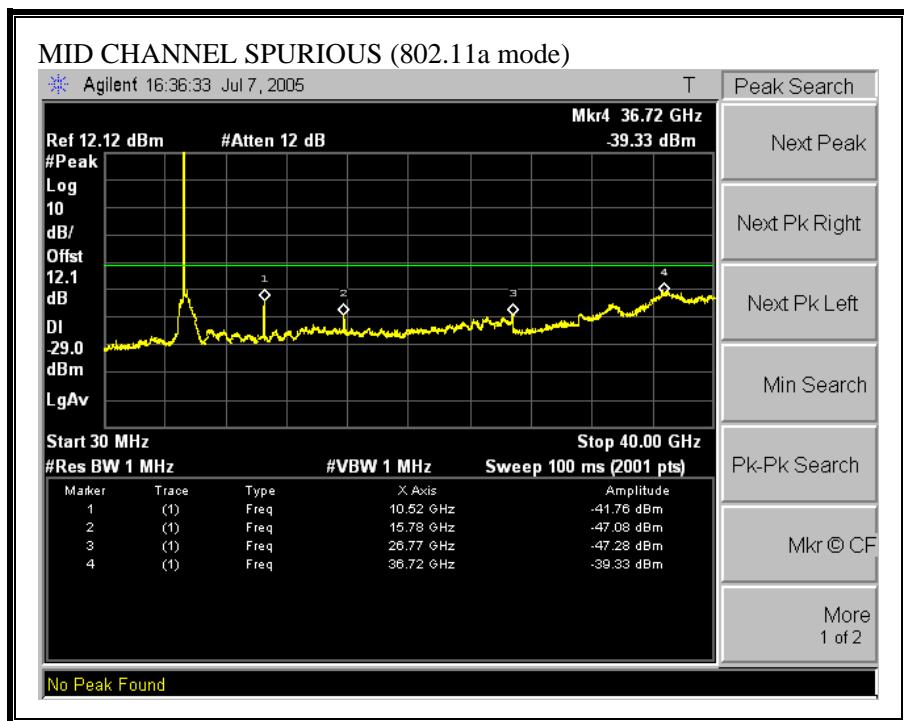

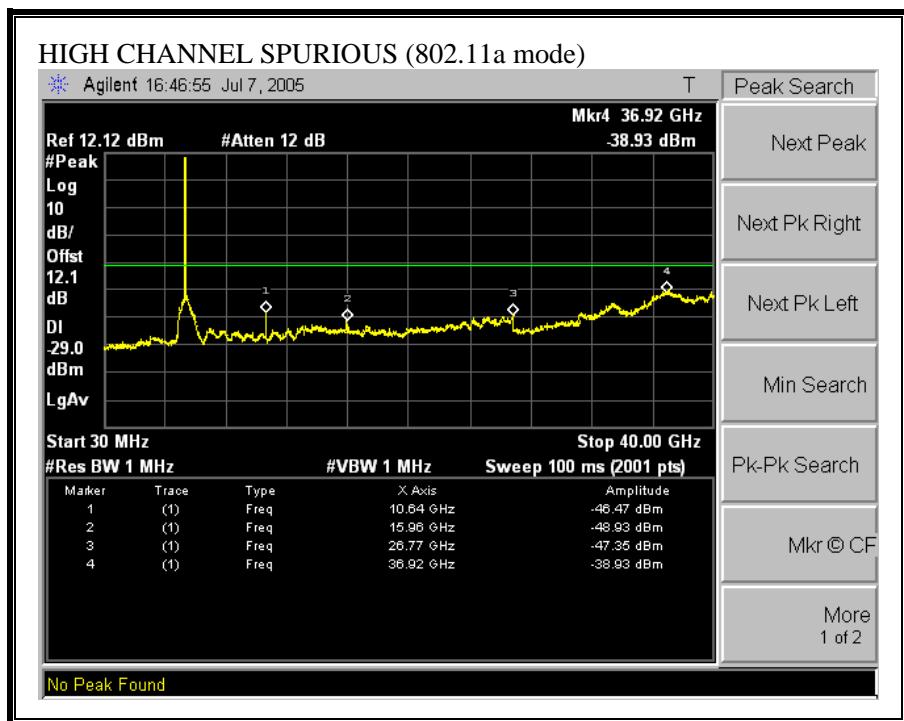

7.2. RADIATED EMISSIONS

7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.


For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


7.2.2. TRANSMITTER ABOVE 1 GHZ FOR 5150 TO 5350 MHz BAND


RESTRICTED BANDEDGE (802.11a MODE, LOW CHANNEL, HORIZONTAL)

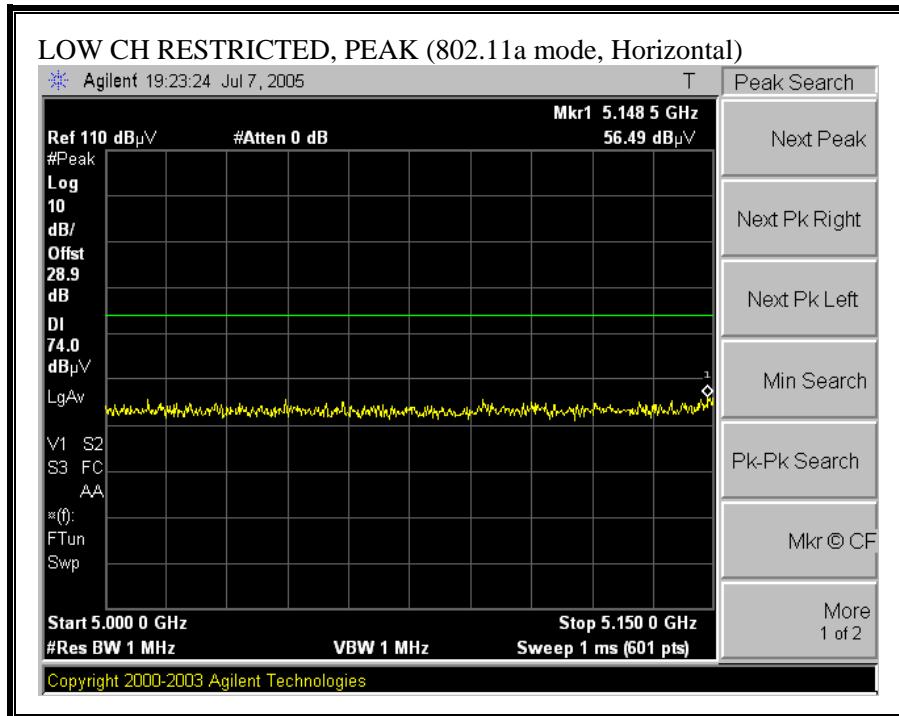

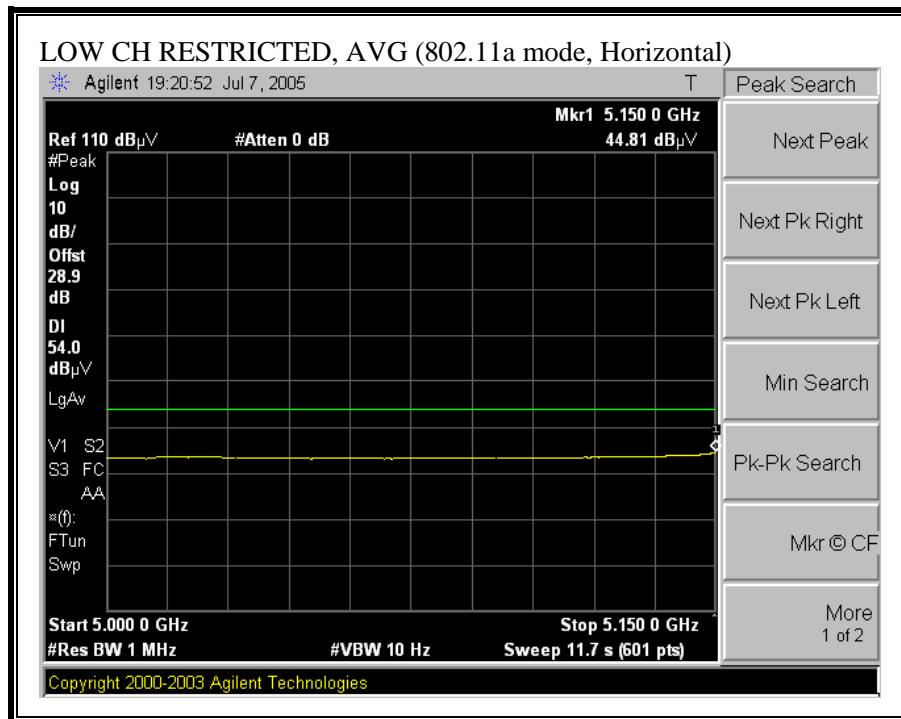



RESTRICTED BANDEDGE (802.11a MODE, LOW CHANNEL, VERTICAL)

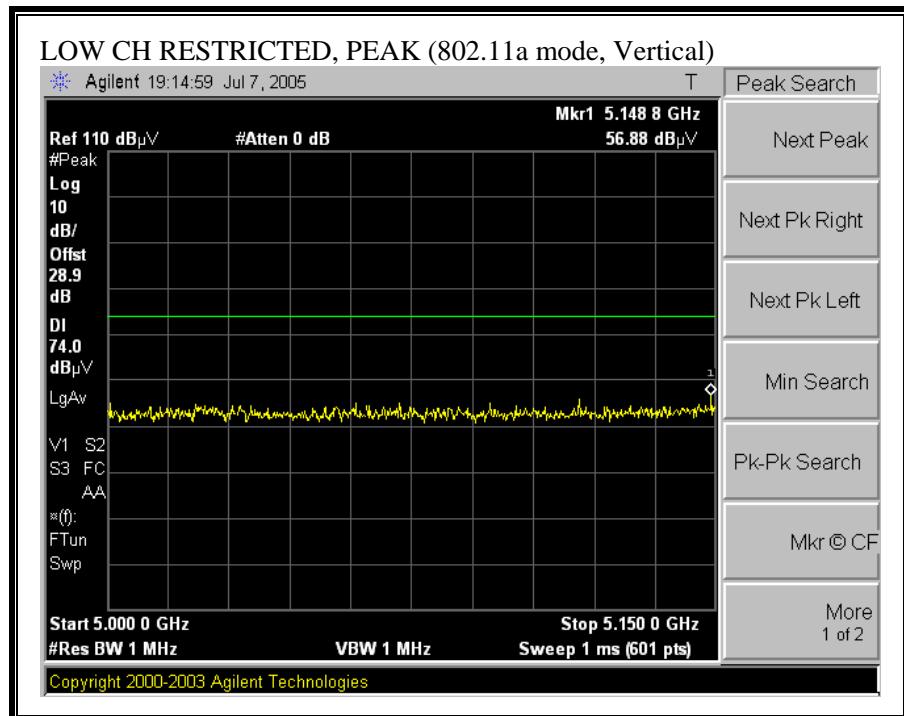

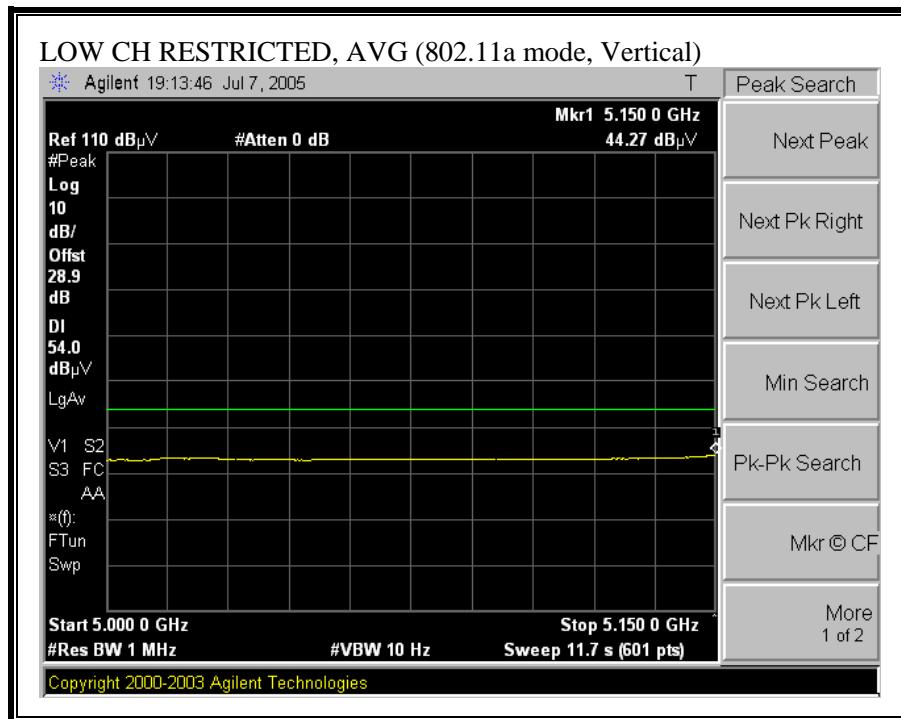



RESTRICTED BANDEDGE (802.11a MODE, HIGH CHANNEL, HORIZONTAL)

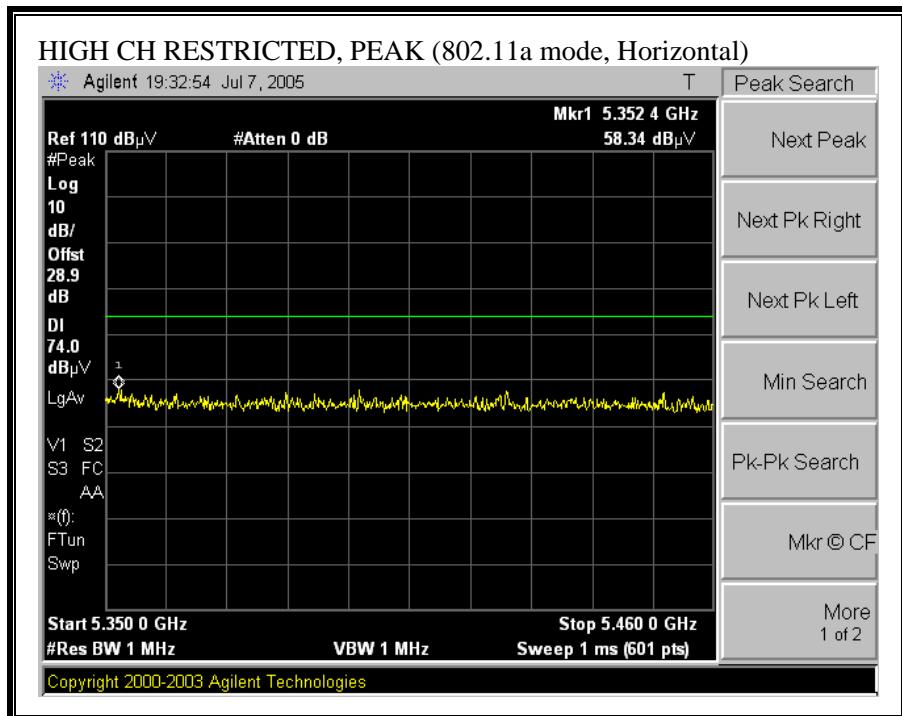

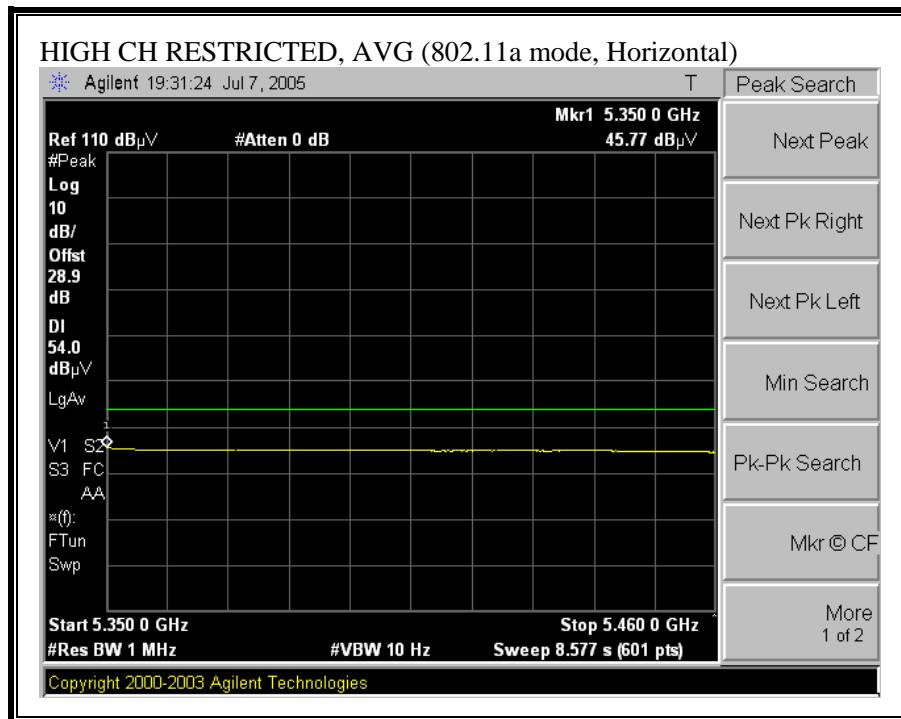

RESTRICTED BANDEDGE (802.11a MODE, HIGH CHANNEL, VERTICAL)

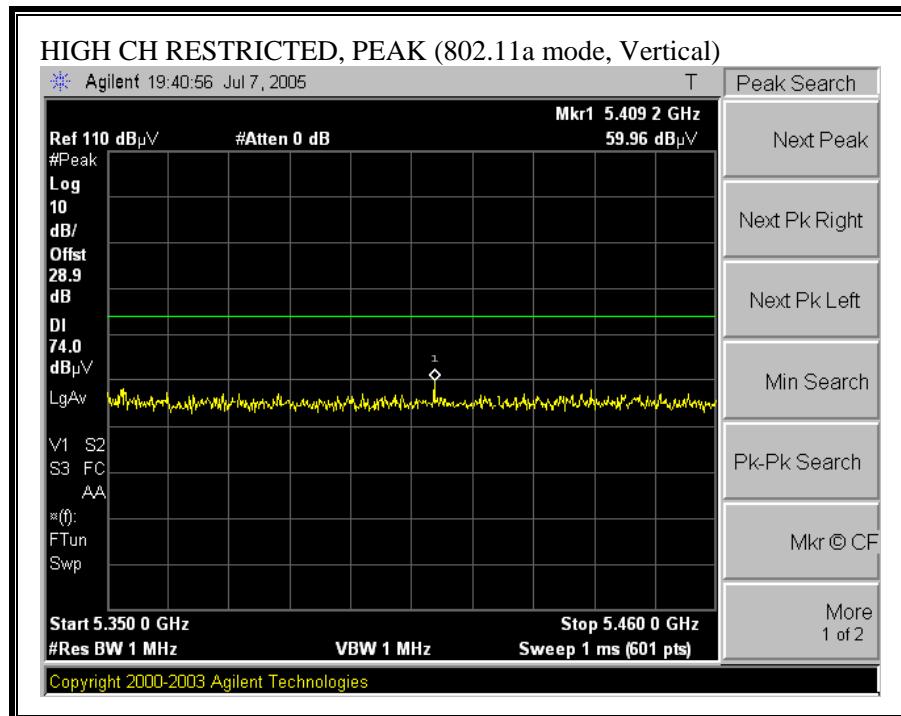

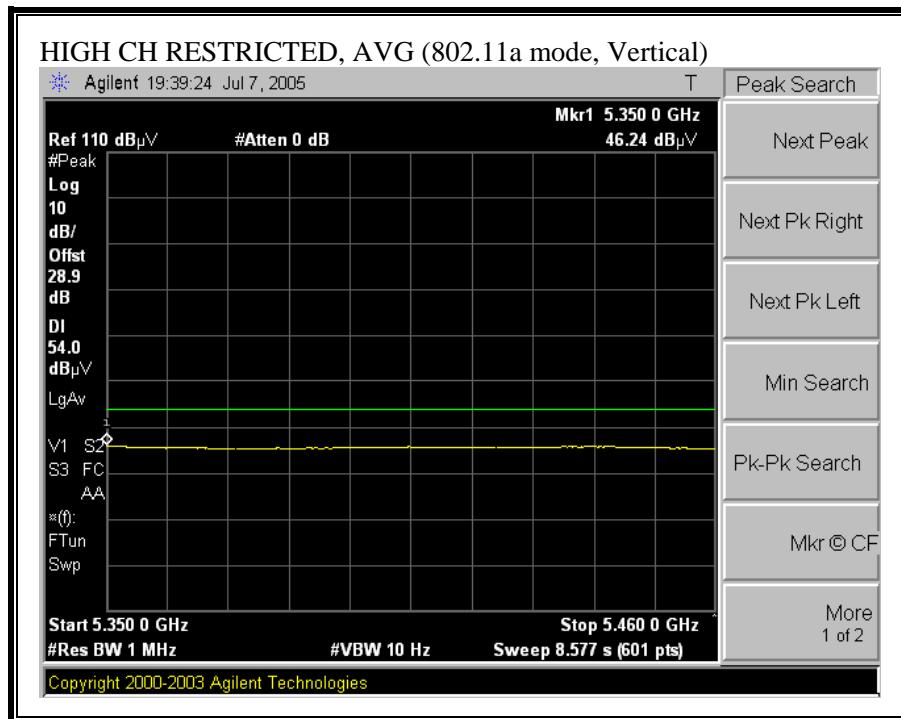


HARMONICS AND SPURIOUS EMISSIONS (802.11a MODE)

07/07/05 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site																																																																																																																																																																																																																																																						
<p>Test Engn: Joseph Chung Project #: 05U3581-2 Company: Microsoft EUT Descrip.: 802.11a/b/g USB 2.0 Wireless Network Adapter EUT M/N: OMNI Test Target: FCC 15.407 Mode Oper: 5.2GHz TX Average Power Meter: Low = 14 dBm, Mid = 17 dBm, High = 14 dBm</p> <p>Test Equipment:</p> <table border="1"> <tr> <td>EMCO Horn 1-18GHz</td> <td>Pre-amplifier 1-26GHz</td> <td>Pre-amplifier 26-40GHz</td> <td>Horn > 18GHz</td> <td>Limit</td> </tr> <tr> <td>TI20; S/N: 29310 @3m</td> <td>T63 Miteq 646456</td> <td></td> <td></td> <td>FCC 15.205</td> </tr> <tr> <td colspan="5">Hi Frequency Cables</td> </tr> <tr> <td>2 foot cable</td> <td>3 foot cable</td> <td>4 foot cable</td> <td>12 foot cable</td> <td>HPF</td> </tr> <tr> <td></td> <td></td> <td>4_David</td> <td>12_Yan</td> <td>HPF_7.6GHz</td> </tr> <tr> <td colspan="5">Reject Filter</td> </tr> </table> <p>Peak Measurements RBW=VBW=1MHz</p> <p>Average Measurements RBW=1MHz ; VBW=10Hz</p> <table border="1"> <thead> <tr> <th>f GHz</th> <th>Dist (m)</th> <th>Read Pk dBuV</th> <th>Read Avg. dBuV</th> <th>AF dB/m</th> <th>CL dB</th> <th>Amp dB</th> <th>D Corr dB</th> <th>Fltr dB</th> <th>Peak dBuV/m</th> <th>Avg dBuV/m</th> <th>Pk Lim dBuV/m</th> <th>Avg Lim dBuV/m</th> <th>Pk Mar dB</th> <th>Avg Mar dB</th> <th>Notes (V/H)</th> </tr> </thead> <tbody> <tr> <td colspan="15">Low Channel</td> </tr> <tr> <td>15.540</td> <td>3.0</td> <td>44.2</td> <td>34.1</td> <td>40.4</td> <td>9.0</td> <td>-38.8</td> <td>0.0</td> <td>0.7</td> <td>55.5</td> <td>45.4</td> <td>74</td> <td>54</td> <td>-18.5</td> <td>-8.6</td> <td>V</td> </tr> <tr> <td>15.540</td> <td>3.0</td> <td>43.7</td> <td>33.9</td> <td>40.4</td> <td>9.0</td> <td>-38.8</td> <td>0.0</td> <td>0.7</td> <td>55.0</td> <td>45.2</td> <td>74</td> <td>54</td> <td>-19.0</td> <td>-8.8</td> <td>H</td> </tr> <tr> <td colspan="15">Mid Channel</td> </tr> <tr> <td>15.780</td> <td>3.0</td> <td>48.5</td> <td>36.3</td> <td>40.5</td> <td>9.0</td> <td>-38.3</td> <td>0.0</td> <td>0.7</td> <td>60.4</td> <td>48.2</td> <td>74</td> <td>54</td> <td>-13.6</td> <td>-5.8</td> <td>V</td> </tr> <tr> <td>15.780</td> <td>3.0</td> <td>46.2</td> <td>33.9</td> <td>40.5</td> <td>9.0</td> <td>-38.3</td> <td>0.0</td> <td>0.7</td> <td>58.1</td> <td>45.8</td> <td>74</td> <td>54</td> <td>-15.9</td> <td>-8.2</td> <td>H</td> </tr> <tr> <td colspan="15">High Channel</td> </tr> <tr> <td>10.640</td> <td>3.0</td> <td>44.5</td> <td>32.7</td> <td>38.2</td> <td>7.6</td> <td>-36.5</td> <td>0.0</td> <td>0.8</td> <td>54.6</td> <td>42.8</td> <td>74</td> <td>54</td> <td>-19.4</td> <td>-11.2</td> <td>V</td> </tr> <tr> <td>10.640</td> <td>3.0</td> <td>43.8</td> <td>32.0</td> <td>38.2</td> <td>7.6</td> <td>-36.5</td> <td>0.0</td> <td>0.8</td> <td>53.9</td> <td>42.1</td> <td>74</td> <td>54</td> <td>-20.1</td> <td>-11.9</td> <td>H</td> </tr> <tr> <td colspan="15">Note: There were no other emissions detected above the system noise floor.</td> </tr> </tbody> </table> <p>Definitions:</p> <table> <tr> <td>f</td> <td>Measurement Frequency</td> <td>Amp</td> <td>Preamp Gain</td> <td>Avg Lim</td> <td>Average Field Strength Limit</td> </tr> <tr> <td>Dist</td> <td>Distance to Antenna</td> <td>D Corr</td> <td>Distance Correct to 3 meters</td> <td>Pk Lim</td> <td>Peak Field Strength Limit</td> </tr> <tr> <td>Read</td> <td>Analyzer Reading</td> <td>Avg</td> <td>Average Field Strength @ 3 m</td> <td>Avg Mar</td> <td>Margin vs. Average Limit</td> </tr> <tr> <td>AF</td> <td>Antenna Factor</td> <td>Peak</td> <td>Calculated Peak Field Strength</td> <td>Pk Mar</td> <td>Margin vs. Peak Limit</td> </tr> <tr> <td>CL</td> <td>Cable Loss</td> <td>HPF</td> <td>High Pass Filter</td> <td></td> <td></td> </tr> </table>															EMCO Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz	Limit	TI20; S/N: 29310 @3m	T63 Miteq 646456			FCC 15.205	Hi Frequency Cables					2 foot cable	3 foot cable	4 foot cable	12 foot cable	HPF			4_David	12_Yan	HPF_7.6GHz	Reject Filter					f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	Low Channel															15.540	3.0	44.2	34.1	40.4	9.0	-38.8	0.0	0.7	55.5	45.4	74	54	-18.5	-8.6	V	15.540	3.0	43.7	33.9	40.4	9.0	-38.8	0.0	0.7	55.0	45.2	74	54	-19.0	-8.8	H	Mid Channel															15.780	3.0	48.5	36.3	40.5	9.0	-38.3	0.0	0.7	60.4	48.2	74	54	-13.6	-5.8	V	15.780	3.0	46.2	33.9	40.5	9.0	-38.3	0.0	0.7	58.1	45.8	74	54	-15.9	-8.2	H	High Channel															10.640	3.0	44.5	32.7	38.2	7.6	-36.5	0.0	0.8	54.6	42.8	74	54	-19.4	-11.2	V	10.640	3.0	43.8	32.0	38.2	7.6	-36.5	0.0	0.8	53.9	42.1	74	54	-20.1	-11.9	H	Note: There were no other emissions detected above the system noise floor.															f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit	Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit	Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit	AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit	CL	Cable Loss	HPF	High Pass Filter		
EMCO Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz	Limit																																																																																																																																																																																																																																																		
TI20; S/N: 29310 @3m	T63 Miteq 646456			FCC 15.205																																																																																																																																																																																																																																																		
Hi Frequency Cables																																																																																																																																																																																																																																																						
2 foot cable	3 foot cable	4 foot cable	12 foot cable	HPF																																																																																																																																																																																																																																																		
		4_David	12_Yan	HPF_7.6GHz																																																																																																																																																																																																																																																		
Reject Filter																																																																																																																																																																																																																																																						
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)																																																																																																																																																																																																																																							
Low Channel																																																																																																																																																																																																																																																						
15.540	3.0	44.2	34.1	40.4	9.0	-38.8	0.0	0.7	55.5	45.4	74	54	-18.5	-8.6	V																																																																																																																																																																																																																																							
15.540	3.0	43.7	33.9	40.4	9.0	-38.8	0.0	0.7	55.0	45.2	74	54	-19.0	-8.8	H																																																																																																																																																																																																																																							
Mid Channel																																																																																																																																																																																																																																																						
15.780	3.0	48.5	36.3	40.5	9.0	-38.3	0.0	0.7	60.4	48.2	74	54	-13.6	-5.8	V																																																																																																																																																																																																																																							
15.780	3.0	46.2	33.9	40.5	9.0	-38.3	0.0	0.7	58.1	45.8	74	54	-15.9	-8.2	H																																																																																																																																																																																																																																							
High Channel																																																																																																																																																																																																																																																						
10.640	3.0	44.5	32.7	38.2	7.6	-36.5	0.0	0.8	54.6	42.8	74	54	-19.4	-11.2	V																																																																																																																																																																																																																																							
10.640	3.0	43.8	32.0	38.2	7.6	-36.5	0.0	0.8	53.9	42.1	74	54	-20.1	-11.9	H																																																																																																																																																																																																																																							
Note: There were no other emissions detected above the system noise floor.																																																																																																																																																																																																																																																						
f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit																																																																																																																																																																																																																																																	
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit																																																																																																																																																																																																																																																	
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit																																																																																																																																																																																																																																																	
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit																																																																																																																																																																																																																																																	
CL	Cable Loss	HPF	High Pass Filter																																																																																																																																																																																																																																																			

7.2.3. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

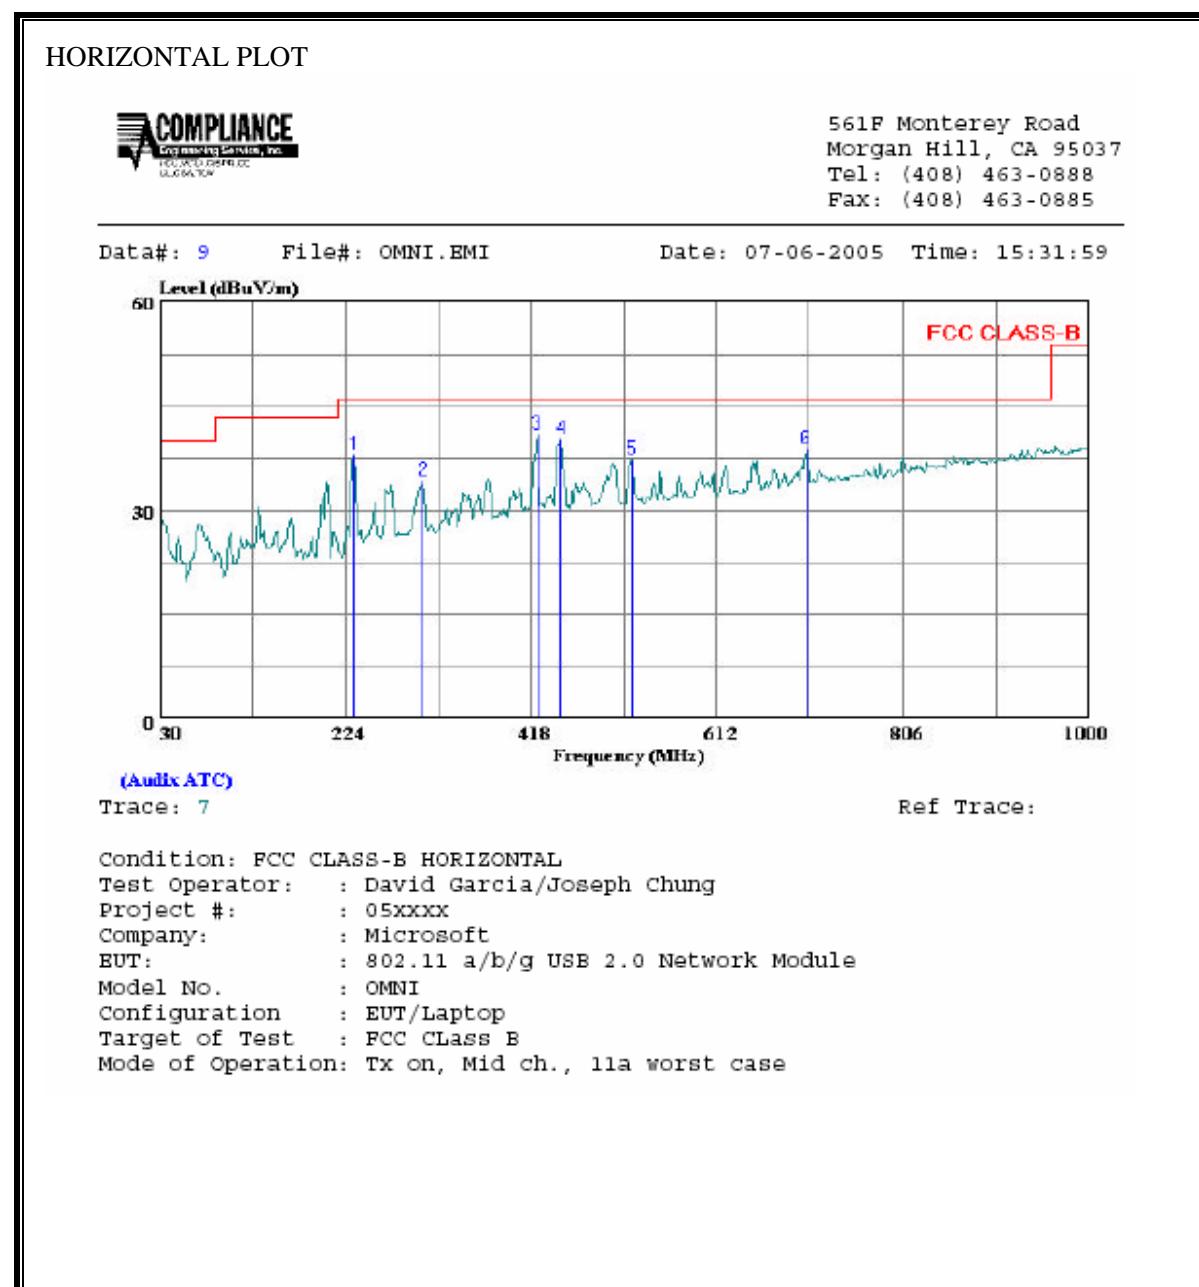

HORIZONTAL DATA

Freq	Read			Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB
1	232.730	24.81	13.17	37.98	46.00	-8.02 Peak
2	305.480	18.37	15.80	34.17	46.00	-11.83 Peak
3	424.790	22.19	18.64	40.83	46.00	-5.17 Peak
4	449.040	21.04	19.17	40.21	46.00	-5.79 Peak
5	523.730	16.74	20.62	37.36	46.00	-8.64 Peak
6	706.090	15.72	23.17	38.89	46.00	-7.11 Peak


SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

VERTICAL PLOT



561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 10 File#: Omni.emi Date: 07-14-2005 Time: 20:21:36

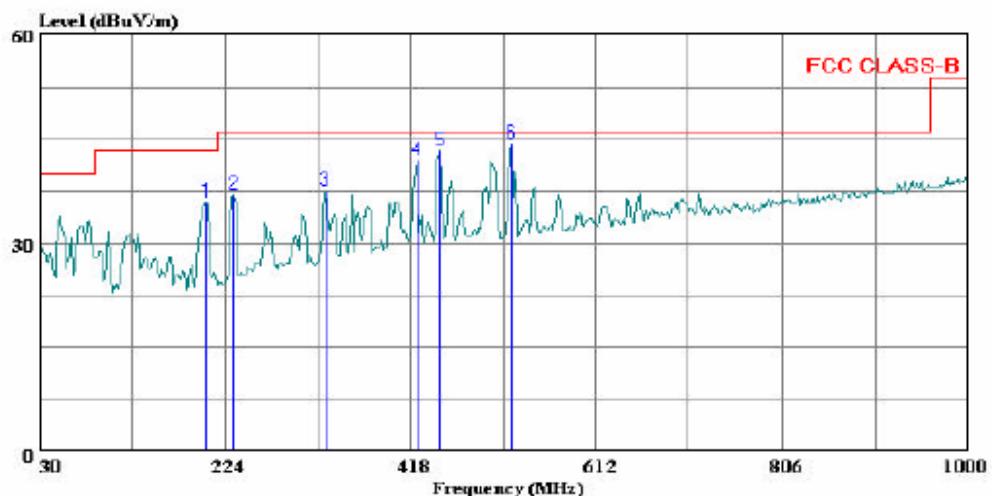

(Audit ATC)

Trace: 5

Ref Trace:

Condition: FCC CLASS-B VERTICAL
Test Operator: : David Garcia/Joseph Chung
Project #: : 053581
Company: : Microsoft
BUT: : 802.11 a/b/g USB 2.0 Network Module
Model No. : OMNI
Configuration : EUT/Laptop
Target of Test : FCC Class B
Mode of Operation: Tx on, Mid ch., 11a worst case

VERTICAL DATA

Freq	MHz	Read		Limit	Over	Remark
		Level	Factor			
		dB	dBuV/m	dBuV/m	dB	
1	204.600	21.93	13.91	35.84	43.50	-7.66 Peak
2	232.730	23.78	13.17	36.95	46.00	-9.05 Peak
3	329.730	21.11	16.44	37.55	46.00	-8.45 Peak
4	424.790	23.31	18.64	41.95	46.00	-4.05 Peak
5	449.040	24.22	19.17	43.39	46.00	-2.61 Peak
6	523.730	23.77	20.62	44.39	46.00	-1.61 Peak

7.3. POWERLINE CONDUCTED EMISSIONS

LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.


RESULTS

No non-compliance noted:

6 WORST EMISSIONS

CONDUCTED EMISSIONS DATA (115VAC 60Hz)										
Freq. (MHz)	Reading			Closs (dB)	Limit	EN_B		Margin		Remark
	PK (dBuV)	QP (dBuV)	AV (dBuV)			QP	AV	QP (dB)	AV (dB)	
0.15	59.62	--	41.55	0.00	66.00	56.00	-6.38	-14.45	L1	
0.29	46.31	--	39.11	0.00	60.44	50.44	-14.13	-11.33	L1	
1.99	32.80	--	30.88	0.00	56.00	46.00	-23.20	-15.12	L1	
0.15	59.17	--	38.42	0.00	65.94	55.94	-6.77	-17.52	L2	
0.29	51.40	--	40.76	0.00	60.41	50.41	-9.01	-9.65	L2	
29.22	30.38	--	20.14	0.00	60.00	50.00	-29.62	-29.86	L2	
6 Worst Data										

LINE 1 RESULTS

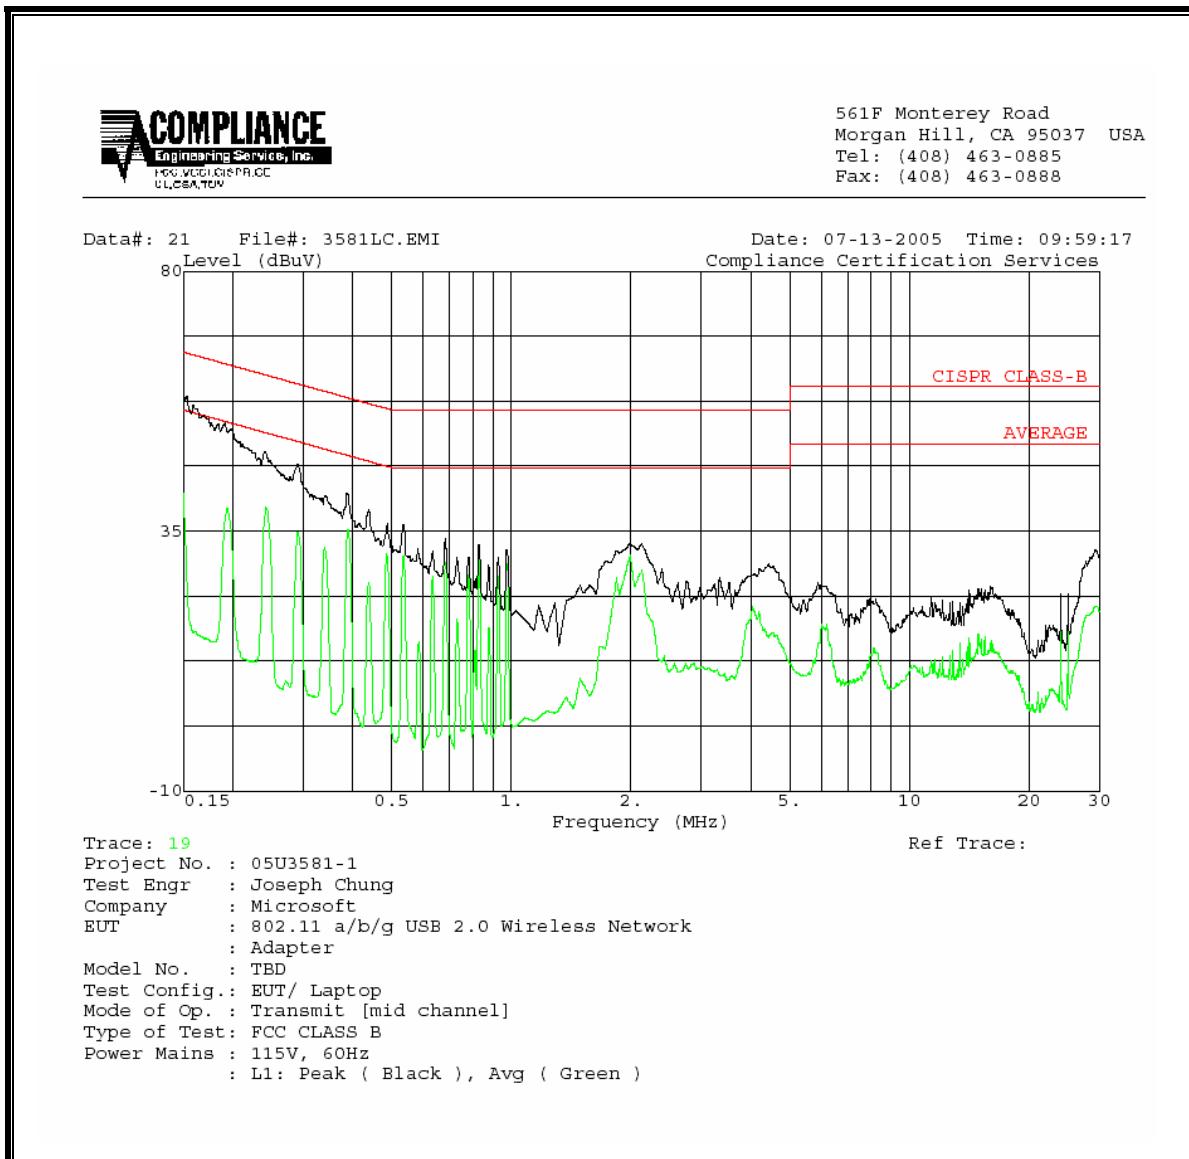

LINE 2 RESULTS

