


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.1251	-27.45	-24.84	-12.63	-7	-5.63
7.25	-66.02	-64.33	-51.77	-21.20	-30.57
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.125	-56.87	-56.48	-30.05	-27	-3.05
7.25	-73.86	-73.13	-60.16	-41.20	-18.96

An array gain of 10.31 dBi was used in the final calculation of the summed data. Also for integration measurement a value of 13.3 dB was added to account for attenuator and cable loss offset.

9.6.27. 802.11be EHT40 MODE 2TX IN THE UNII-8 BAND (MID GAIN)

HIGH CHANNEL RESTRICTED BAND EDGE (7085MHz) – 484T LOW POWER INDOOR

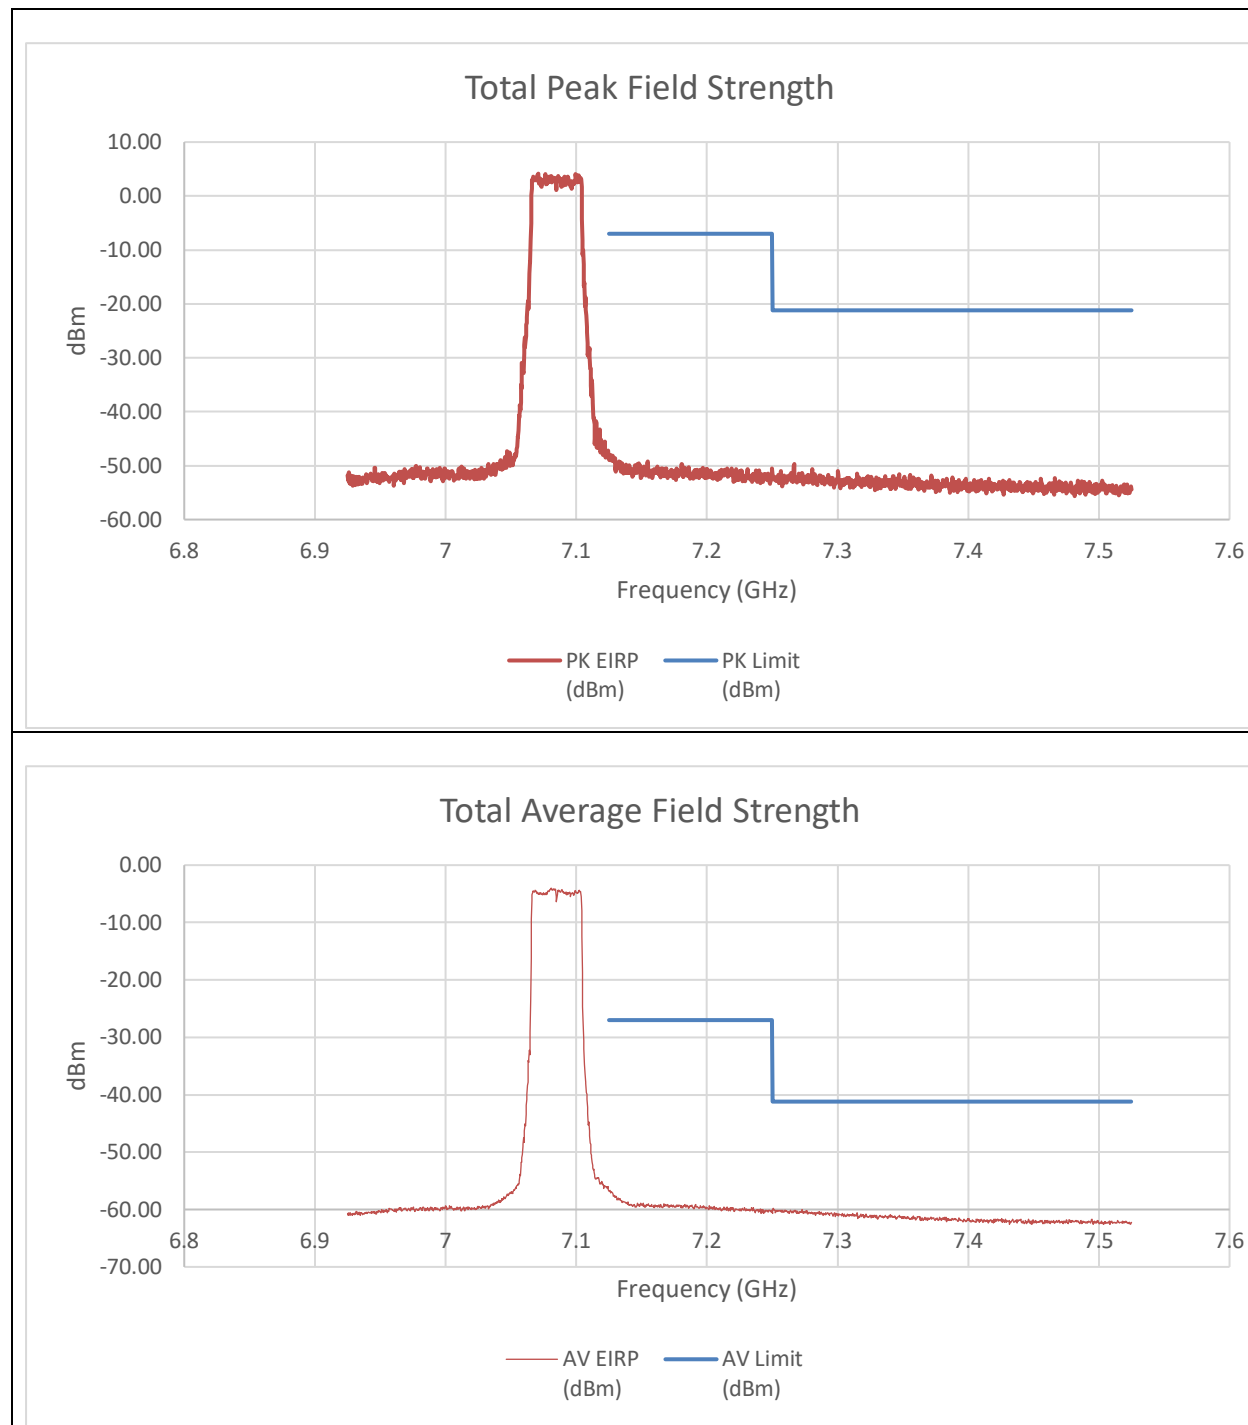


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-63.35	-60.49	-48.37	-7.00	-41.37
7.25	-65.81	-65.84	-52.50	-21.20	-31.30
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-71.88	-68.86	-56.79	-27.00	-29.79
7.25	-73.51	-72.75	-59.79	-41.20	-18.59

An array gain of 10.31 dBi was used in the final calculation of the summed data.

9.6.28. 802.11be EHT80 MODE 2TX IN THE UNII-8 BAND (MID GAIN)

HIGH CHANNEL RESTRICTED BAND EDGE (7025MHz) – 484T+242T(CONTIGUOUS) LOW POWER INDOOR


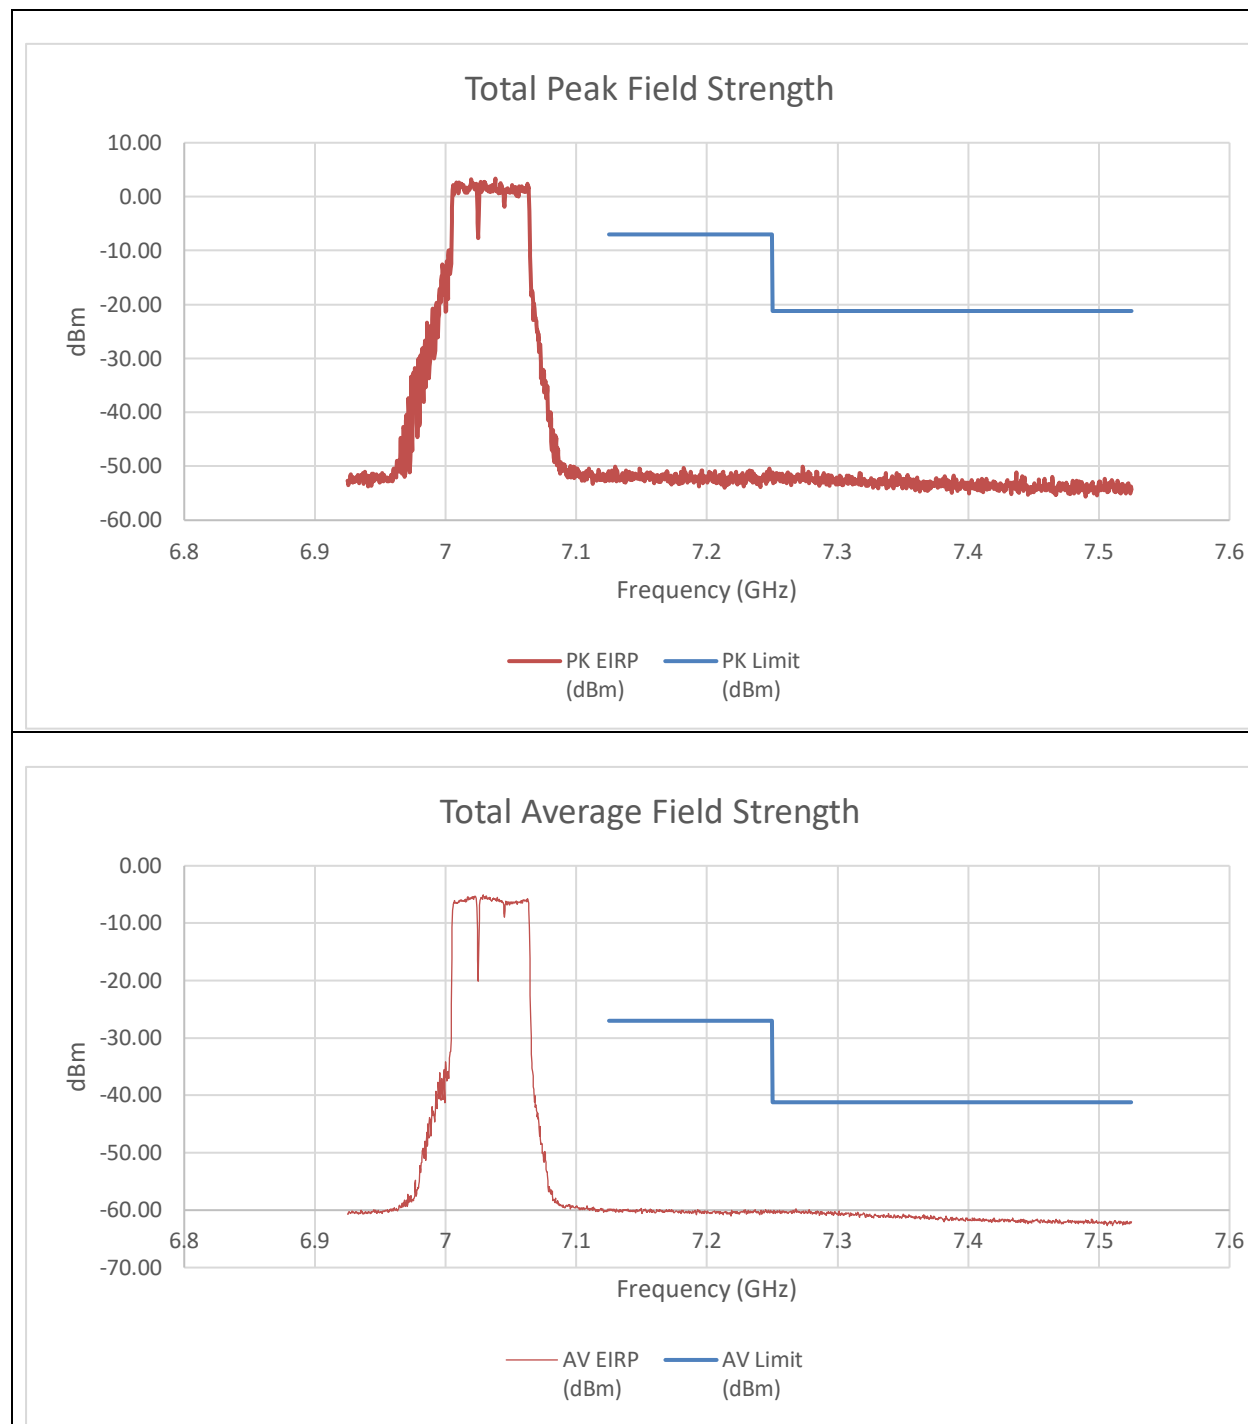


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-65.53	-65.84	-52.36	-7.00	-45.36
7.25	-66.52	-66.49	-53.18	-21.20	-31.98
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-73.07	-73.48	-59.95	-27.00	-32.95
7.25	-73.75	-73.99	-60.55	-41.20	-19.35

An array gain of 10.31 dBi was used in the final calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (7025MHz) – 484T+242T(NON-CONTIGUOUS) LOW POWER INDOOR

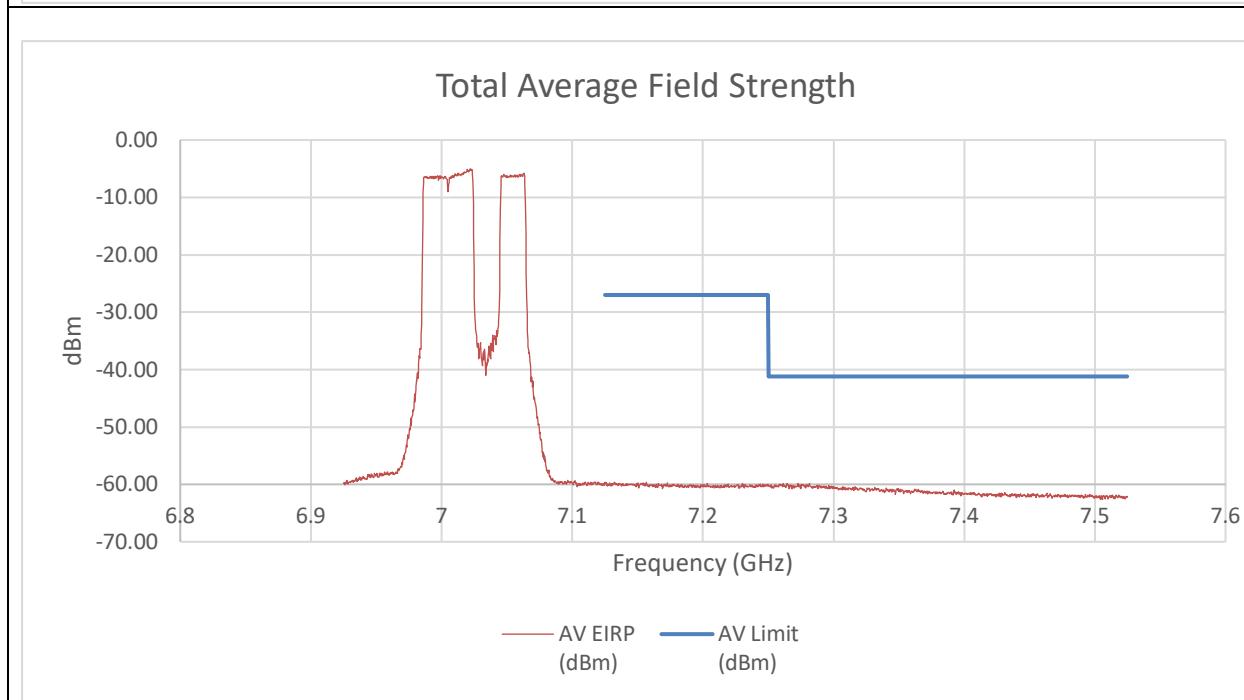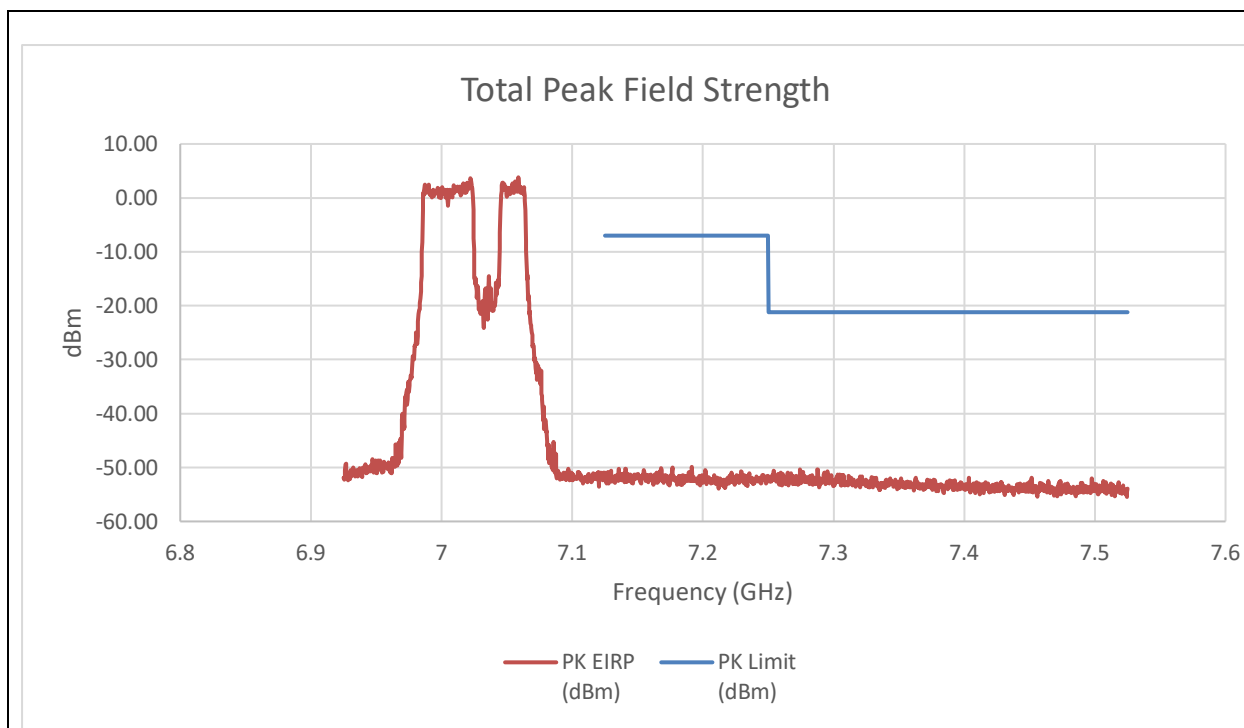


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-65.74	-66.08	-52.59	-7.00	-45.59
7.25	-65.11	-66.61	-52.48	-21.20	-31.28
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-73.33	-73.30	-59.99	-27.00	-32.99
7.25	-73.41	-73.75	-60.26	-41.20	-19.06

An array gain of 10.31 dBi was used in the final calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (7025MHz) – 242T+484T(NON-CONTIGUOUS) LOW POWER INDOOR

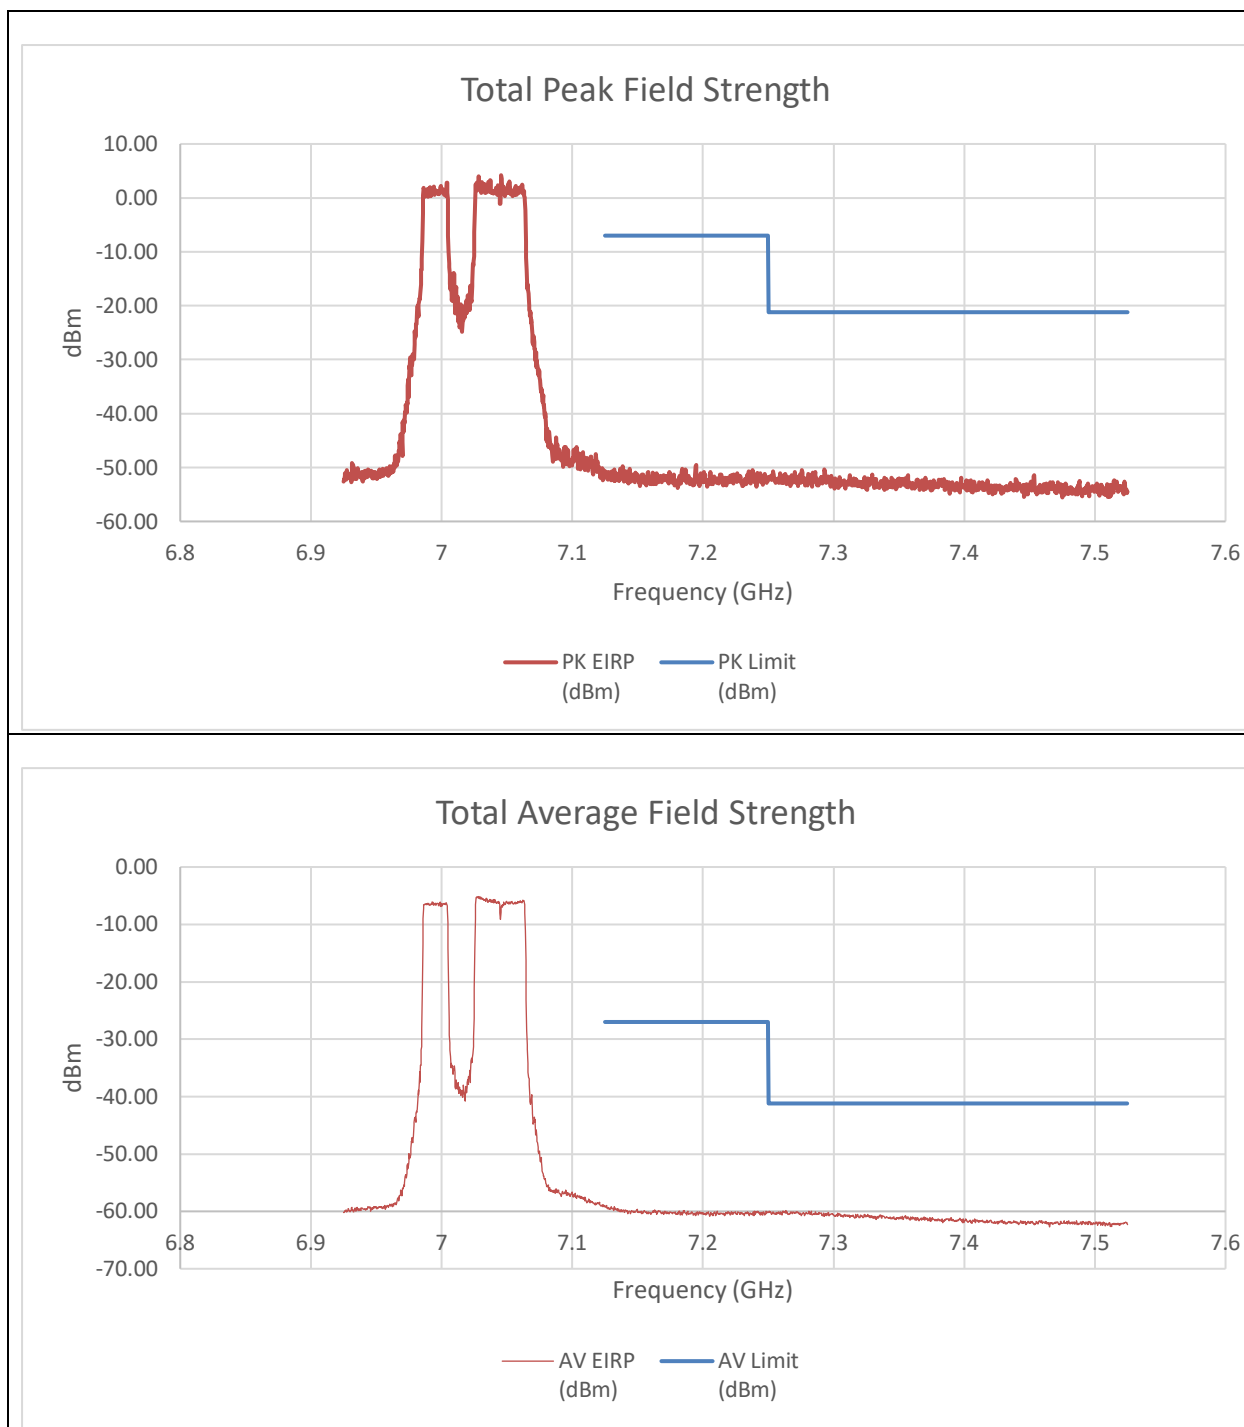


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-64.55	-64.70	-51.30	-7.00	-44.30
7.25	-65.01	-65.14	-51.75	-21.20	-30.55
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-73.32	-71.77	-59.16	-27.00	-32.16
7.25	-73.54	-73.07	-59.98	-41.20	-18.78

An array gain of 10.31 dBi was used in the final calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (7025MHz) – 996T LOW POWER INDOOR

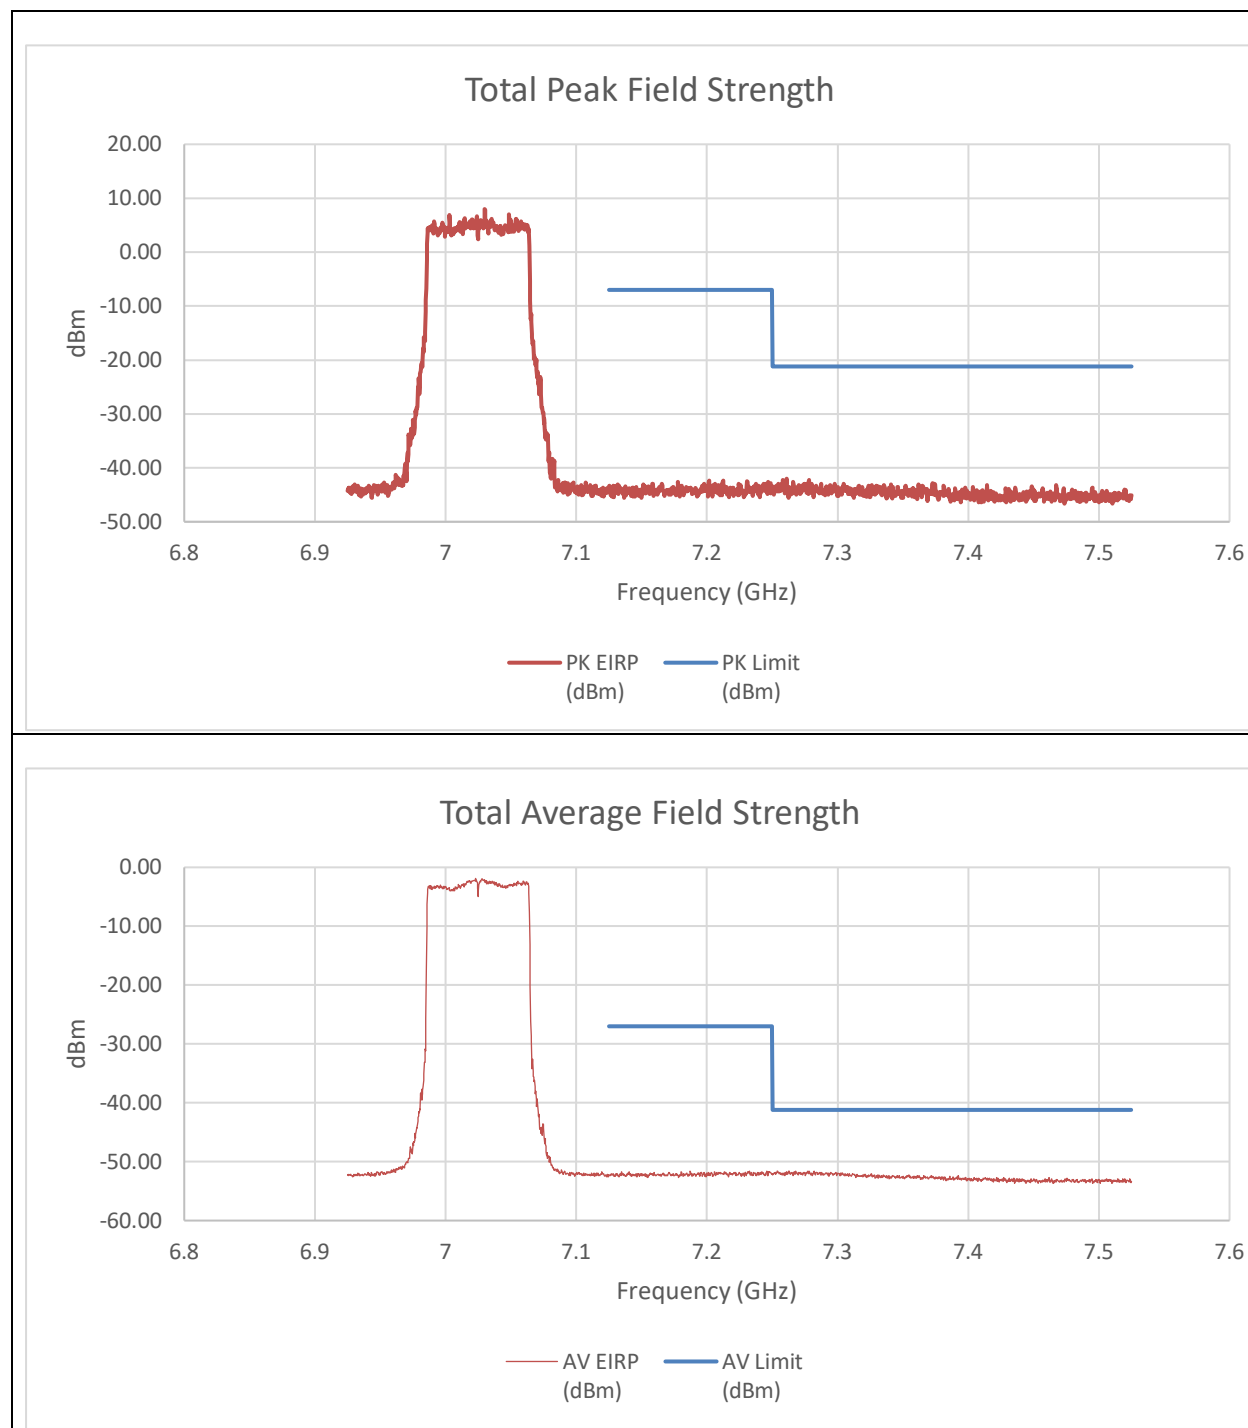


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-57.81	-57.65	-44.41	-7.00	-37.41
7.25	-58.61	-57.40	-44.64	-21.20	-23.44
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-65.65	-65.62	-52.22	-27.00	-25.22
7.25	-65.44	-65.48	-52.05	-41.20	-10.85

An array gain of 10.31 dBi and a duty cycle correction factor of 0.09 dBm was used in the final calculation of the summed data.

9.6.29. 802.11be EHT160 MODE 2TX IN THE UNII-8 BAND (MID GAIN)

HIGH CHANNEL RESTRICTED BAND EDGE (6985MHz) – 996T+484T(CONTIGUOUS) LOW POWER INDOOR

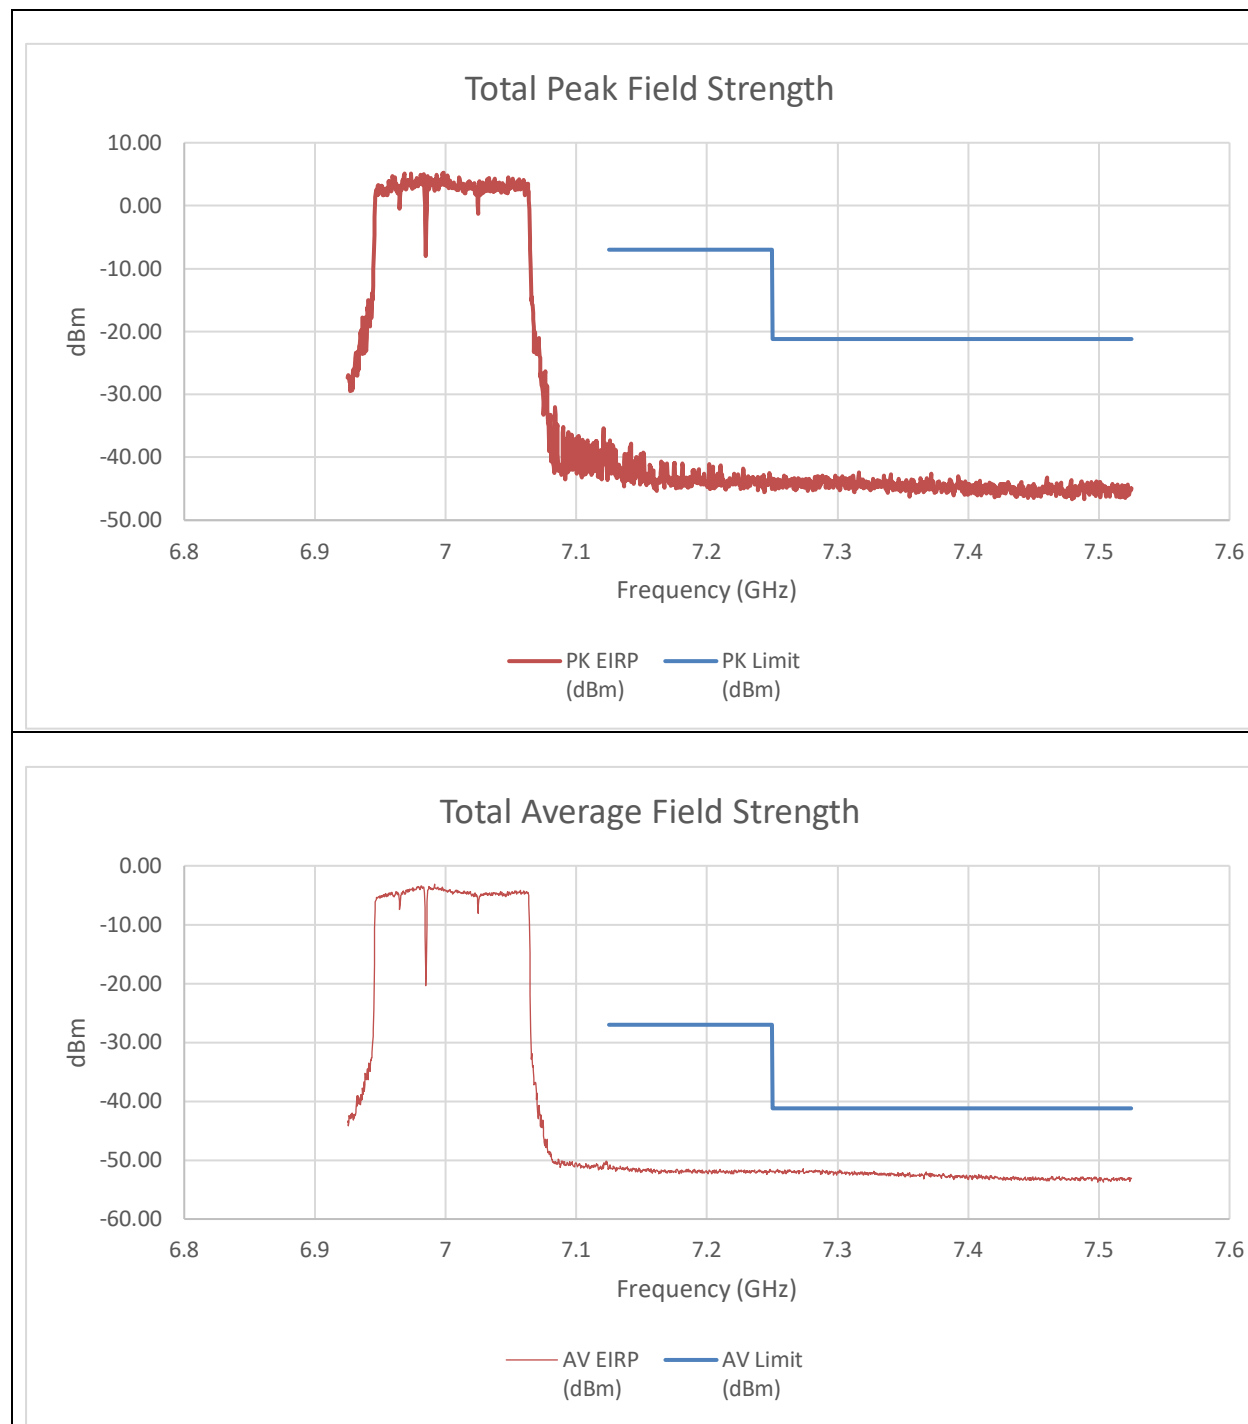


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-53.60	-49.35	-37.65	-7.00	-30.65
7.25	-58.33	-56.65	-44.09	-21.20	-22.89
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-64.53	-64.82	-51.26	-27.00	-24.26
7.25	-65.39	-65.22	-51.90	-41.20	-10.70

An array gain of 10.31 dBi and a dut cycle correction factor of 0.09 dBmwas used in the final calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6985MHz) – 996T+484T(NON-CONTIGUOUS) LOW POWER INDOOR

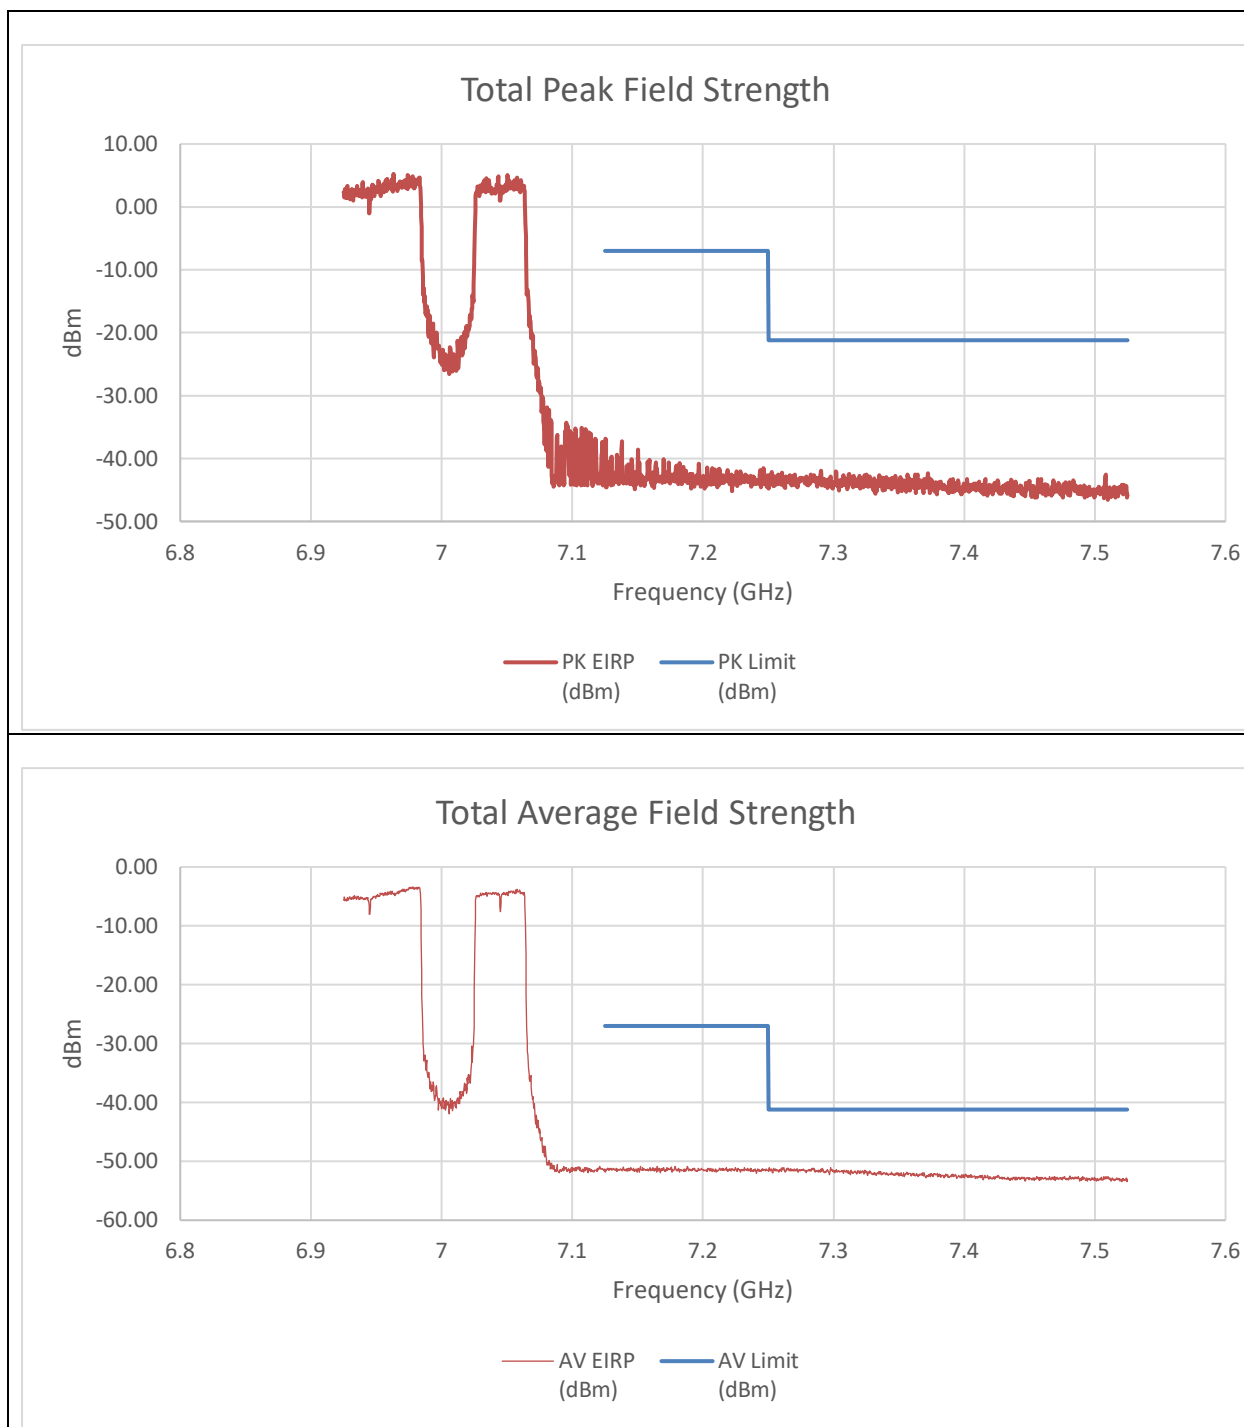


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-57.43	-58.50	-44.61	-7.00	-37.61
7.25	-56.16	-57.53	-43.47	-21.20	-22.27
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-65.29	-64.38	-51.40	-27.00	-24.40
7.25	-65.19	-63.89	-51.08	-41.20	-9.88

An array gain of 10.31 dBi and a duty cycle correction factor of was used in the final calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6985MHz) – 484T+996T(NON-CONTIGUOUS) LOW POWER INDOOR

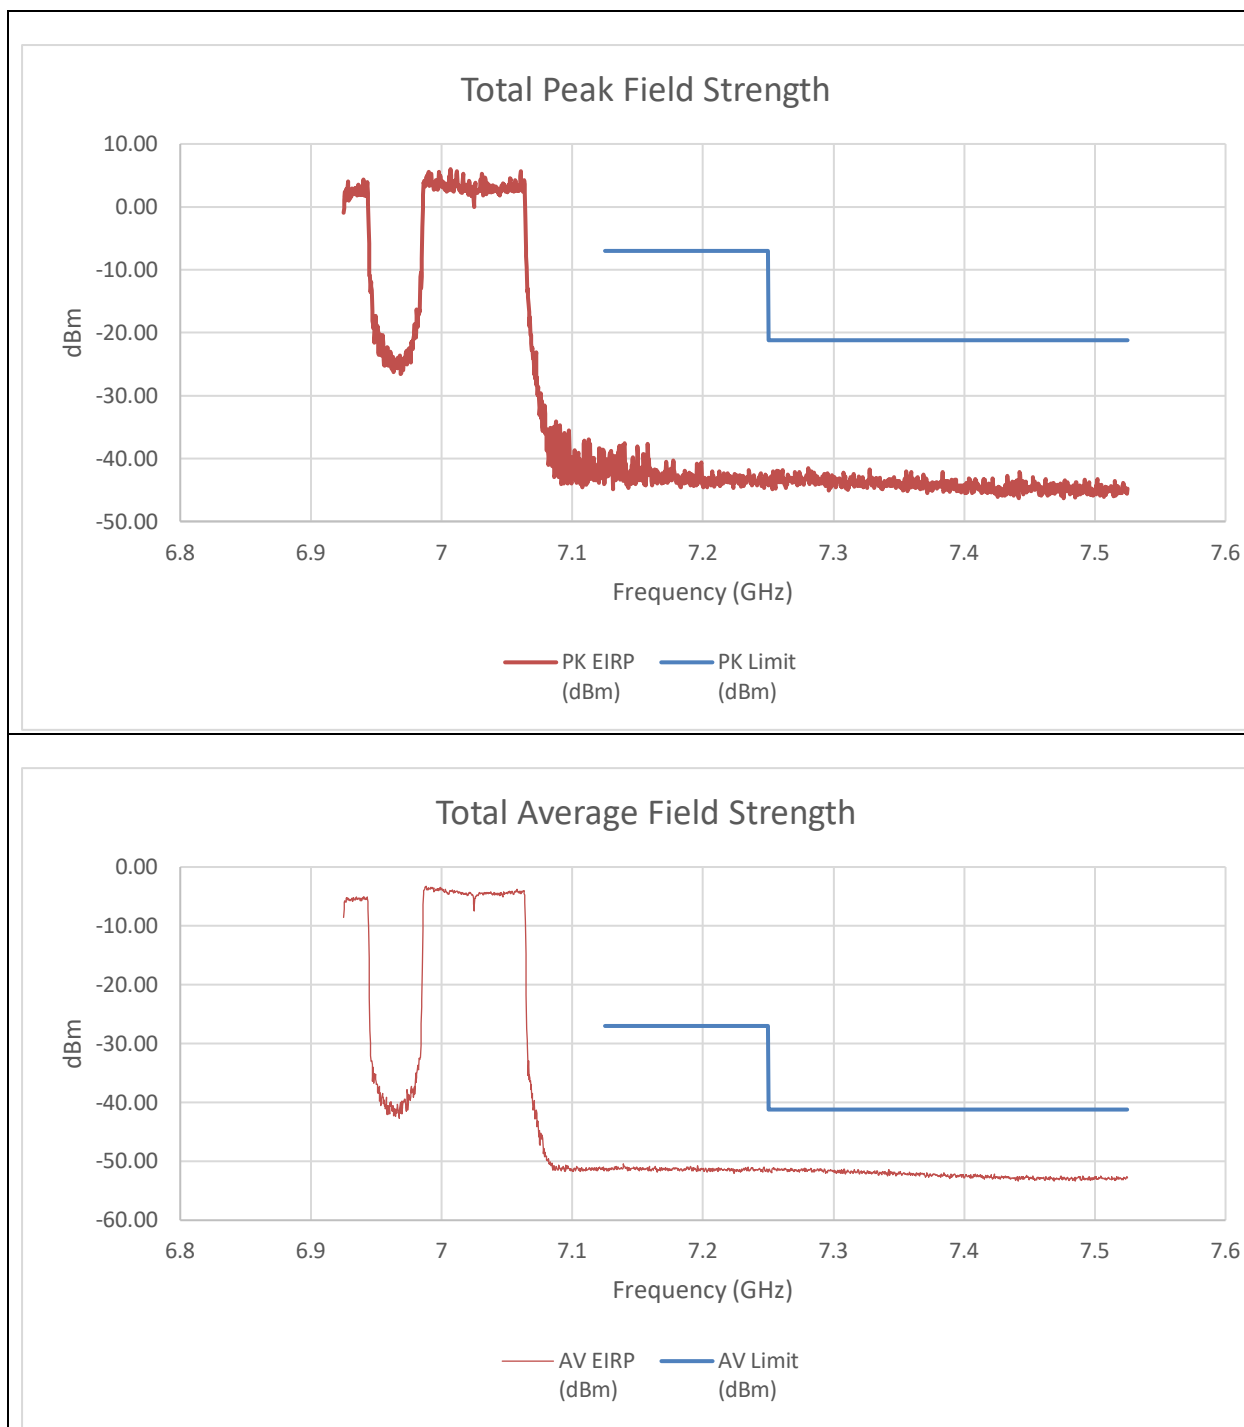


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-54.23	-58.05	-42.41	-7.00	-35.41
7.25	-58.07	-56.00	-43.59	-21.20	-22.39
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-64.75	-64.38	-51.15	-27.00	-24.15
7.25	-64.98	-64.48	-51.31	-41.20	-10.11

An array gain of 10.31 dBi and a duty cycle correction factor of was used in the final calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6985MHz) – 242T+484T+996T(NON-CONTIGUOUS)
LOW POWER INDOOR

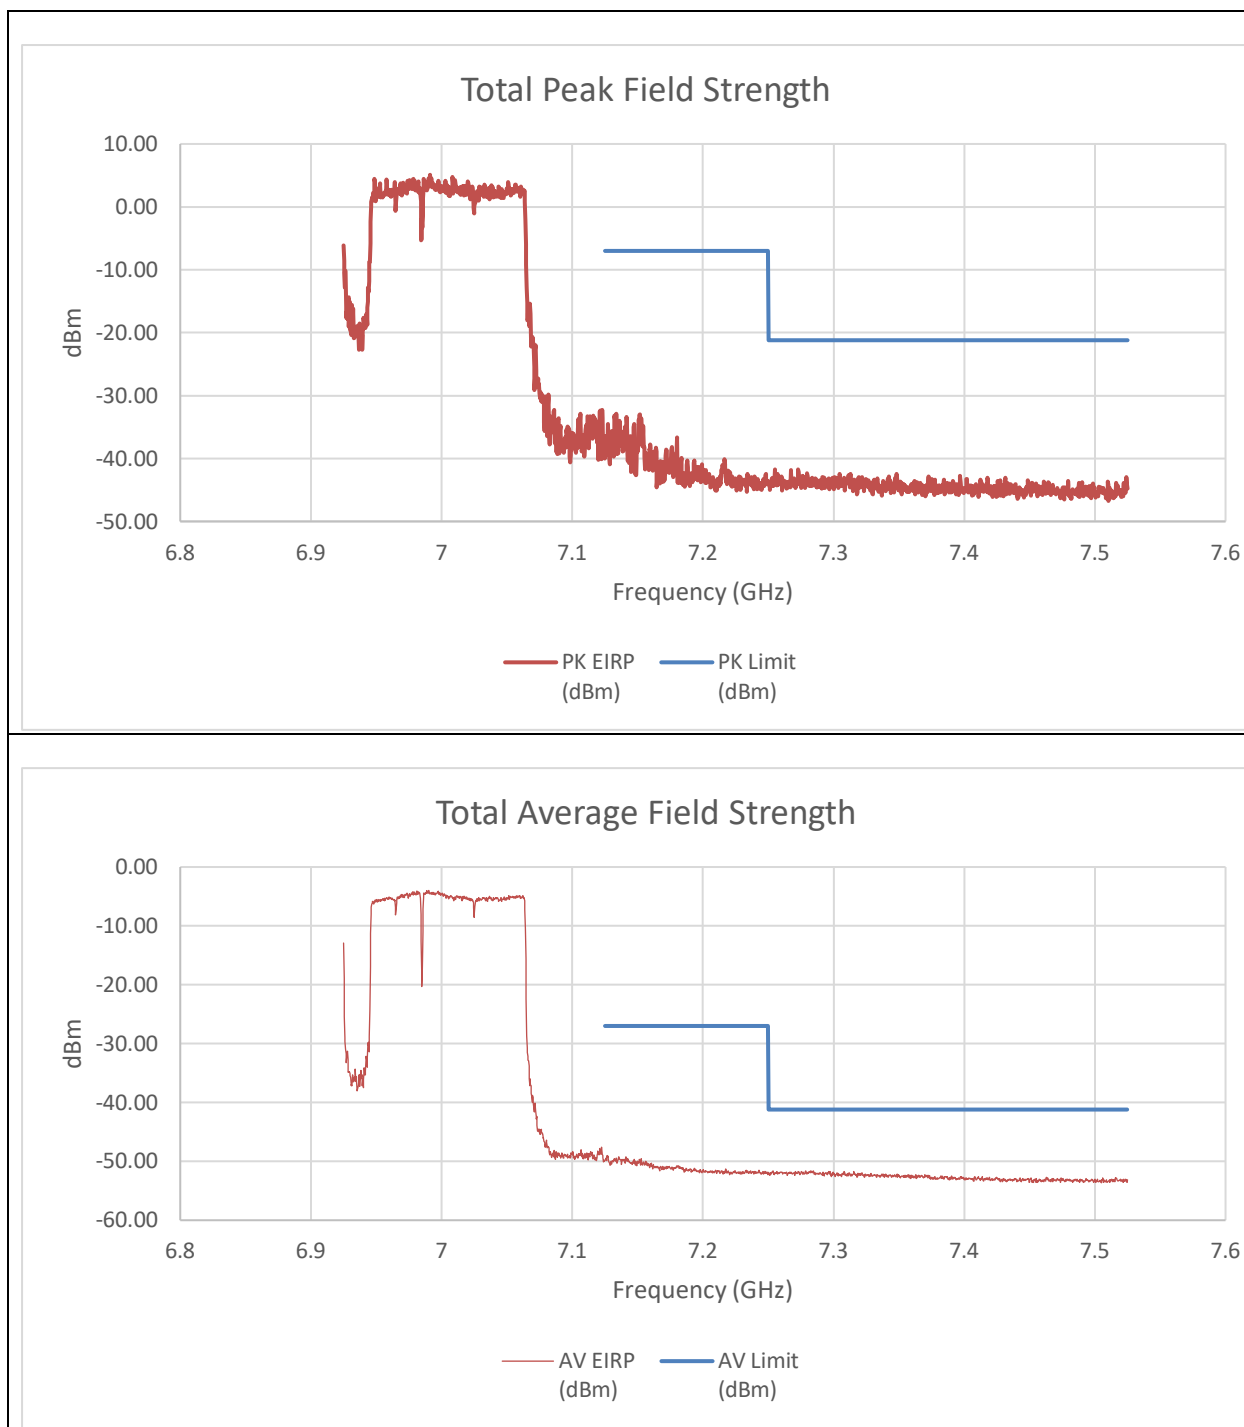


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-57.13	-47.33	-36.59	-7.00	-29.59
7.25	-56.98	-58.48	-44.35	-21.20	-23.15
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-64.43	-61.57	-49.45	-27.00	-22.45
7.25	-65.51	-65.17	-52.02	-41.20	-10.82

An array gain of 10.31 dBi was used in the final calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6985MHz) – 484T+242T+996T(NON-CONTIGUOUS)
LOW POWER INDOOR

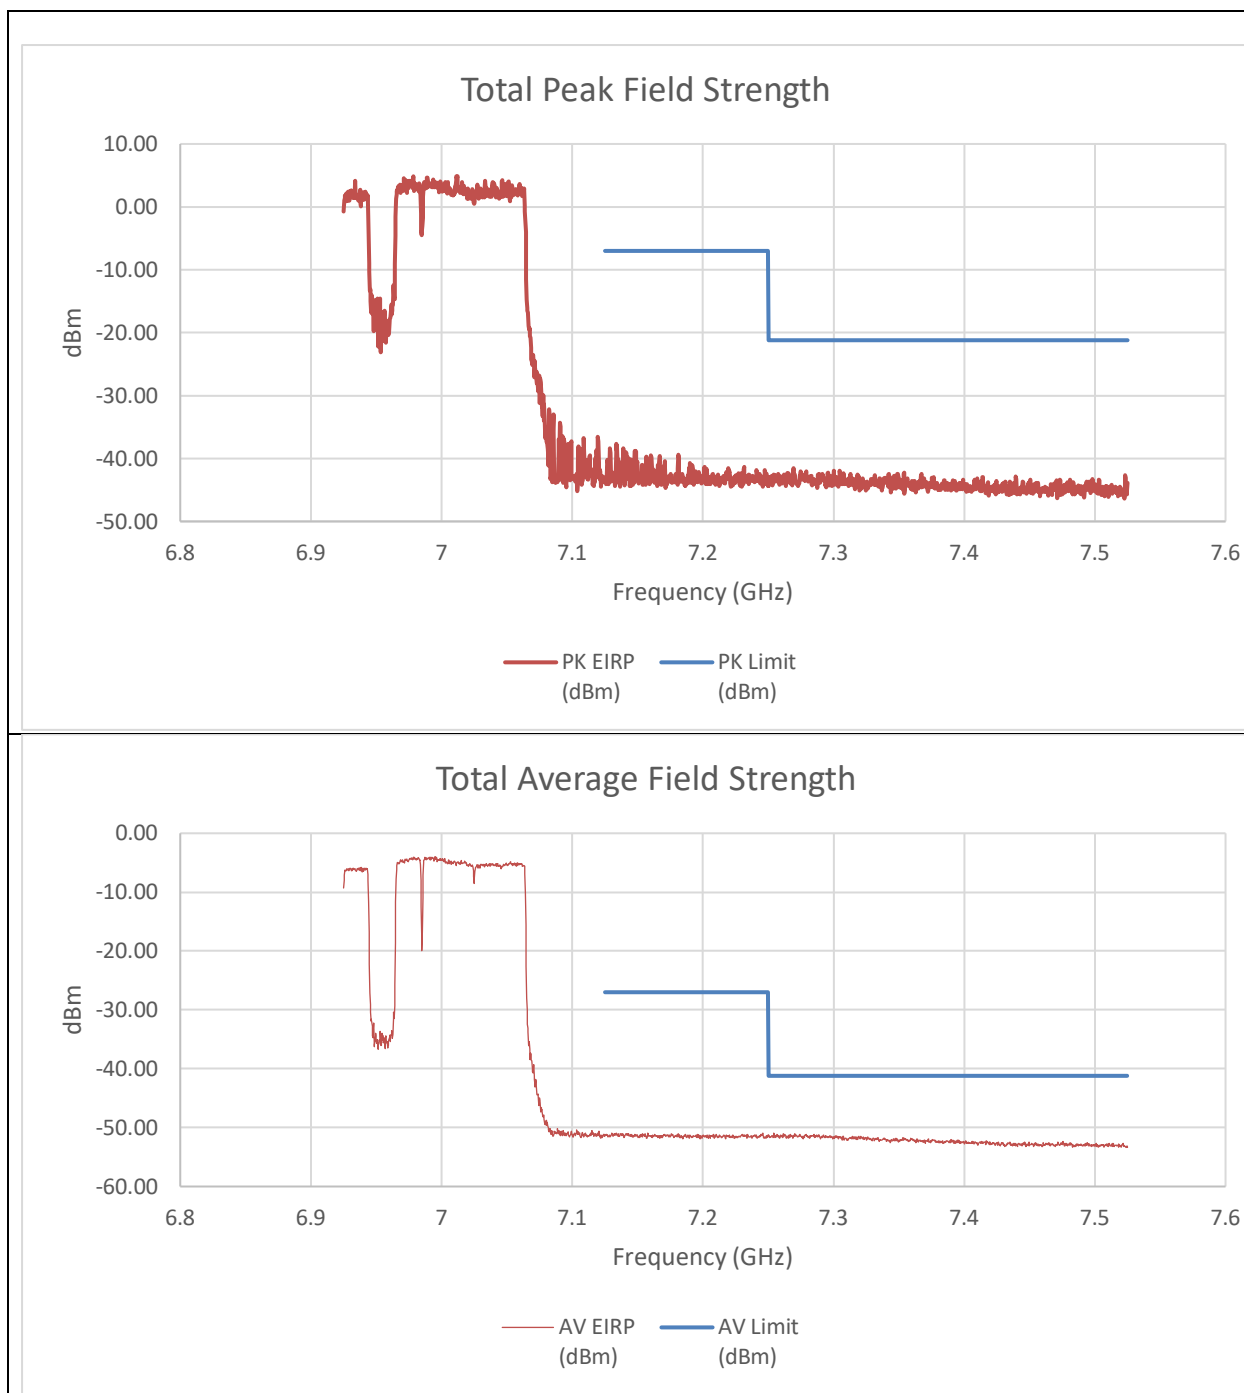


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-57.80	-57.02	-44.07	-7.00	-37.07
7.25	-57.42	-55.46	-43.01	-21.20	-21.81
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-65.00	-64.16	-51.24	-27.00	-24.24
7.25	-65.20	-64.37	-51.44	-41.20	-10.24

An array gain of 10.31 dBi was used in the final calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6985MHz) – 484T+242T+996T(NON-CONTIGUOUS 2)
LOW POWER INDOOR


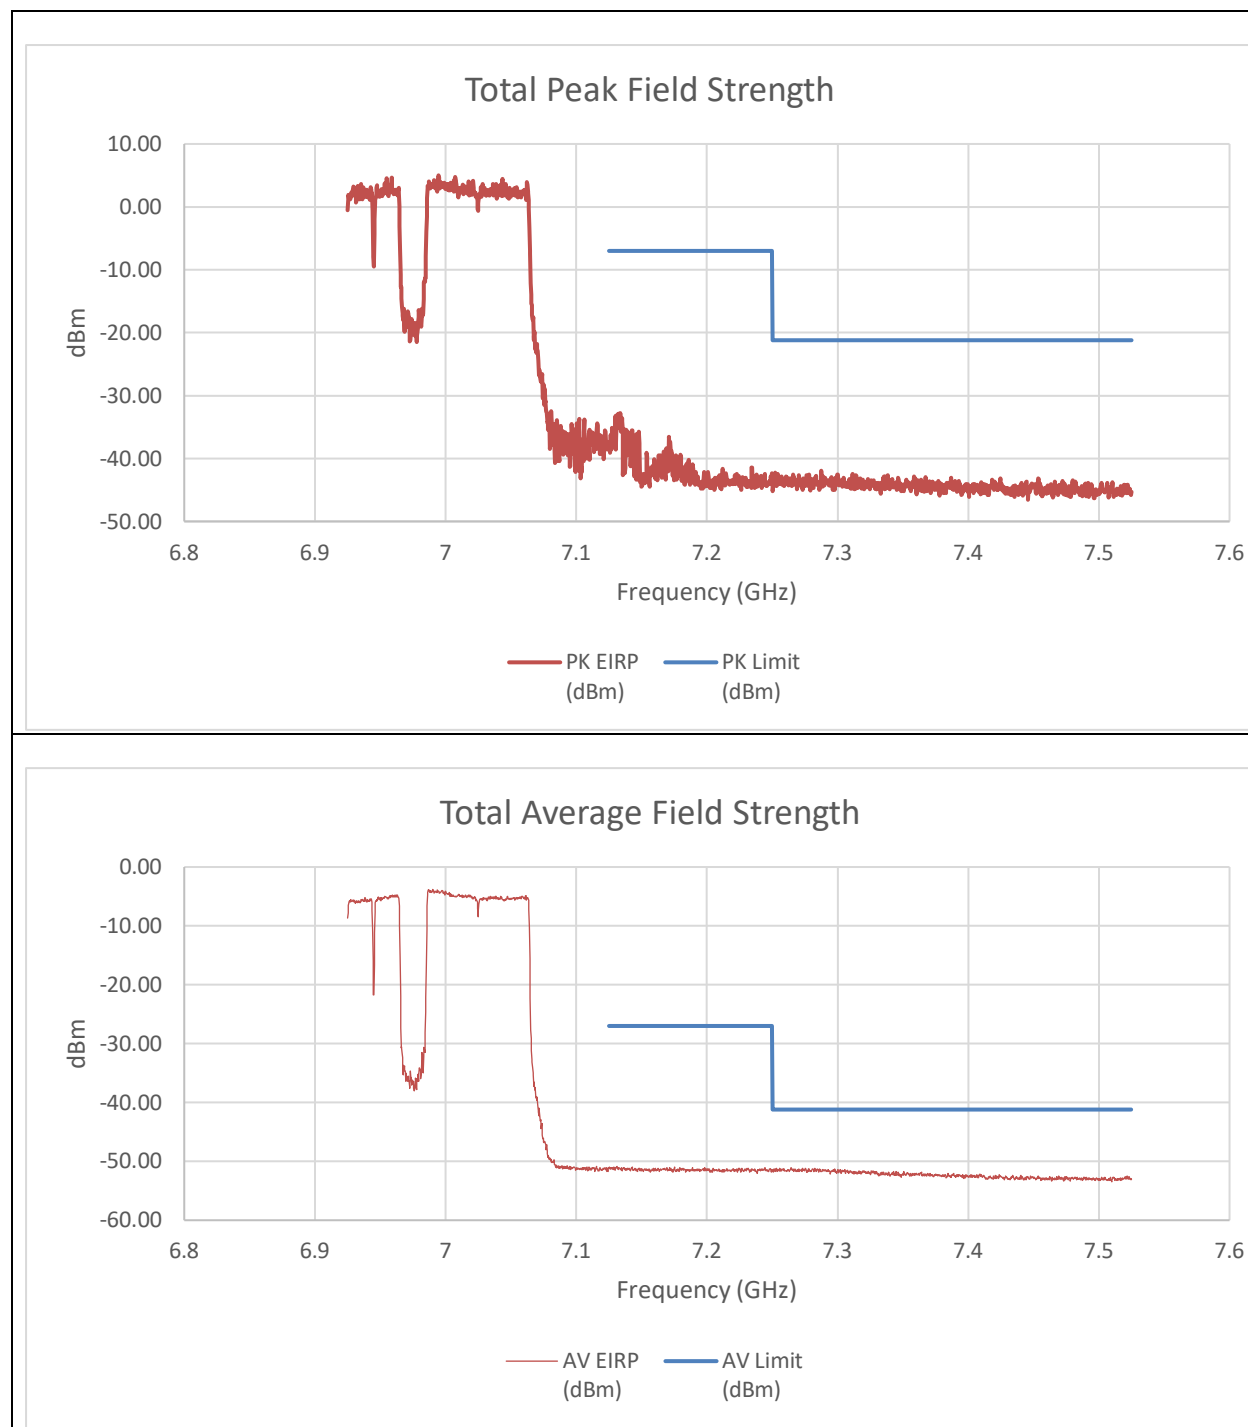


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-56.02	-50.48	-39.10	-7.00	-32.10
7.25	-58.20	-57.32	-44.42	-21.20	-23.22
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-64.37	-64.33	-51.03	-27.00	-24.03
7.25	-65.60	-64.80	-51.86	-41.20	-10.66

An array gain of 10.31 dBi was used in the final calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6985MHz) – 996T+484T+242T(CONTIGUOUS) LOW POWER INDOOR

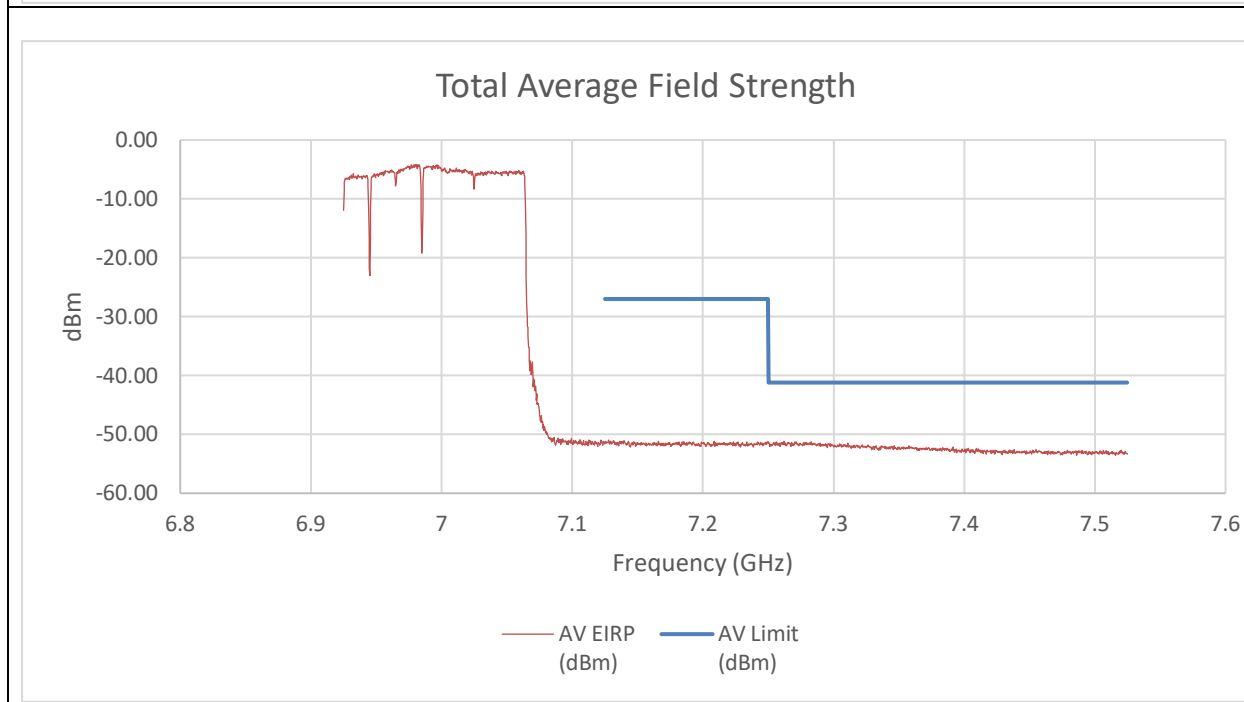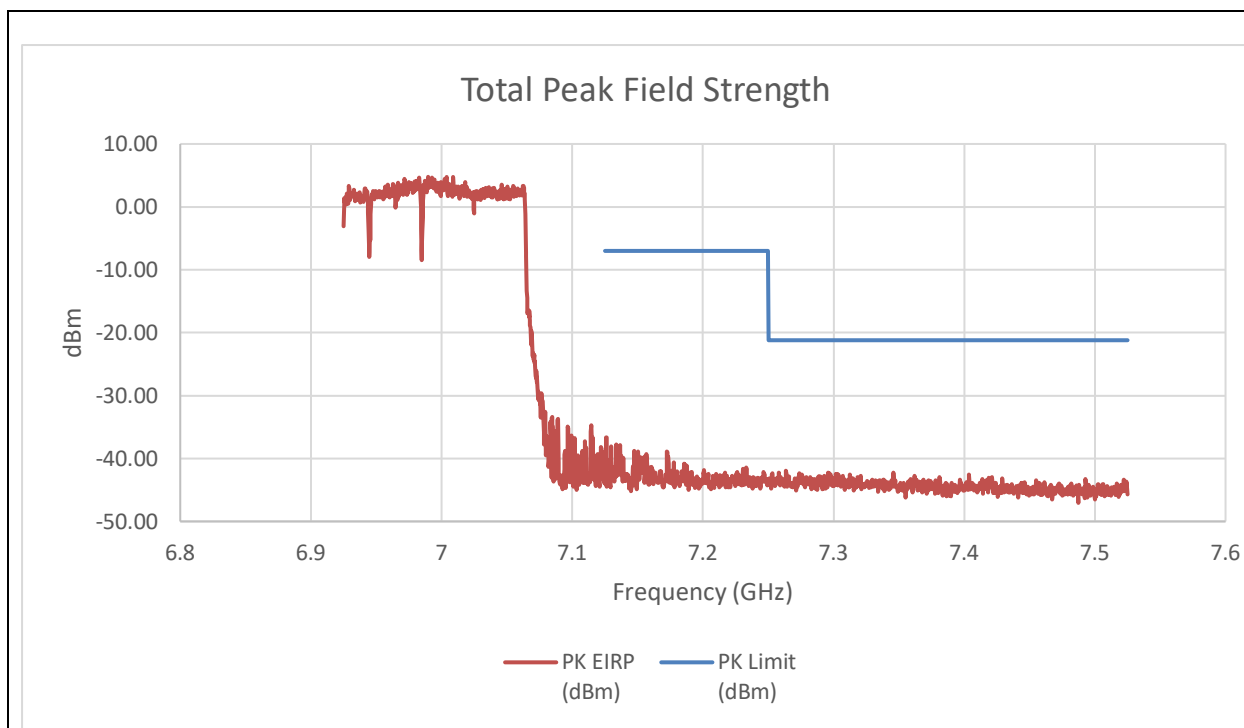


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-57.51	-47.31	-36.60	-7.00	-29.60
7.25	-57.56	-55.68	-43.20	-21.20	-22.00
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-65.04	-64.25	-51.31	-27.00	-24.31
7.25	-65.55	-64.22	-51.51	-41.20	-10.31

An array gain of 10.31 dBi was used in the final calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6985MHz) – 996T+484T+242T(NON-CONTIGUOUS)
LOW POWER INDOOR


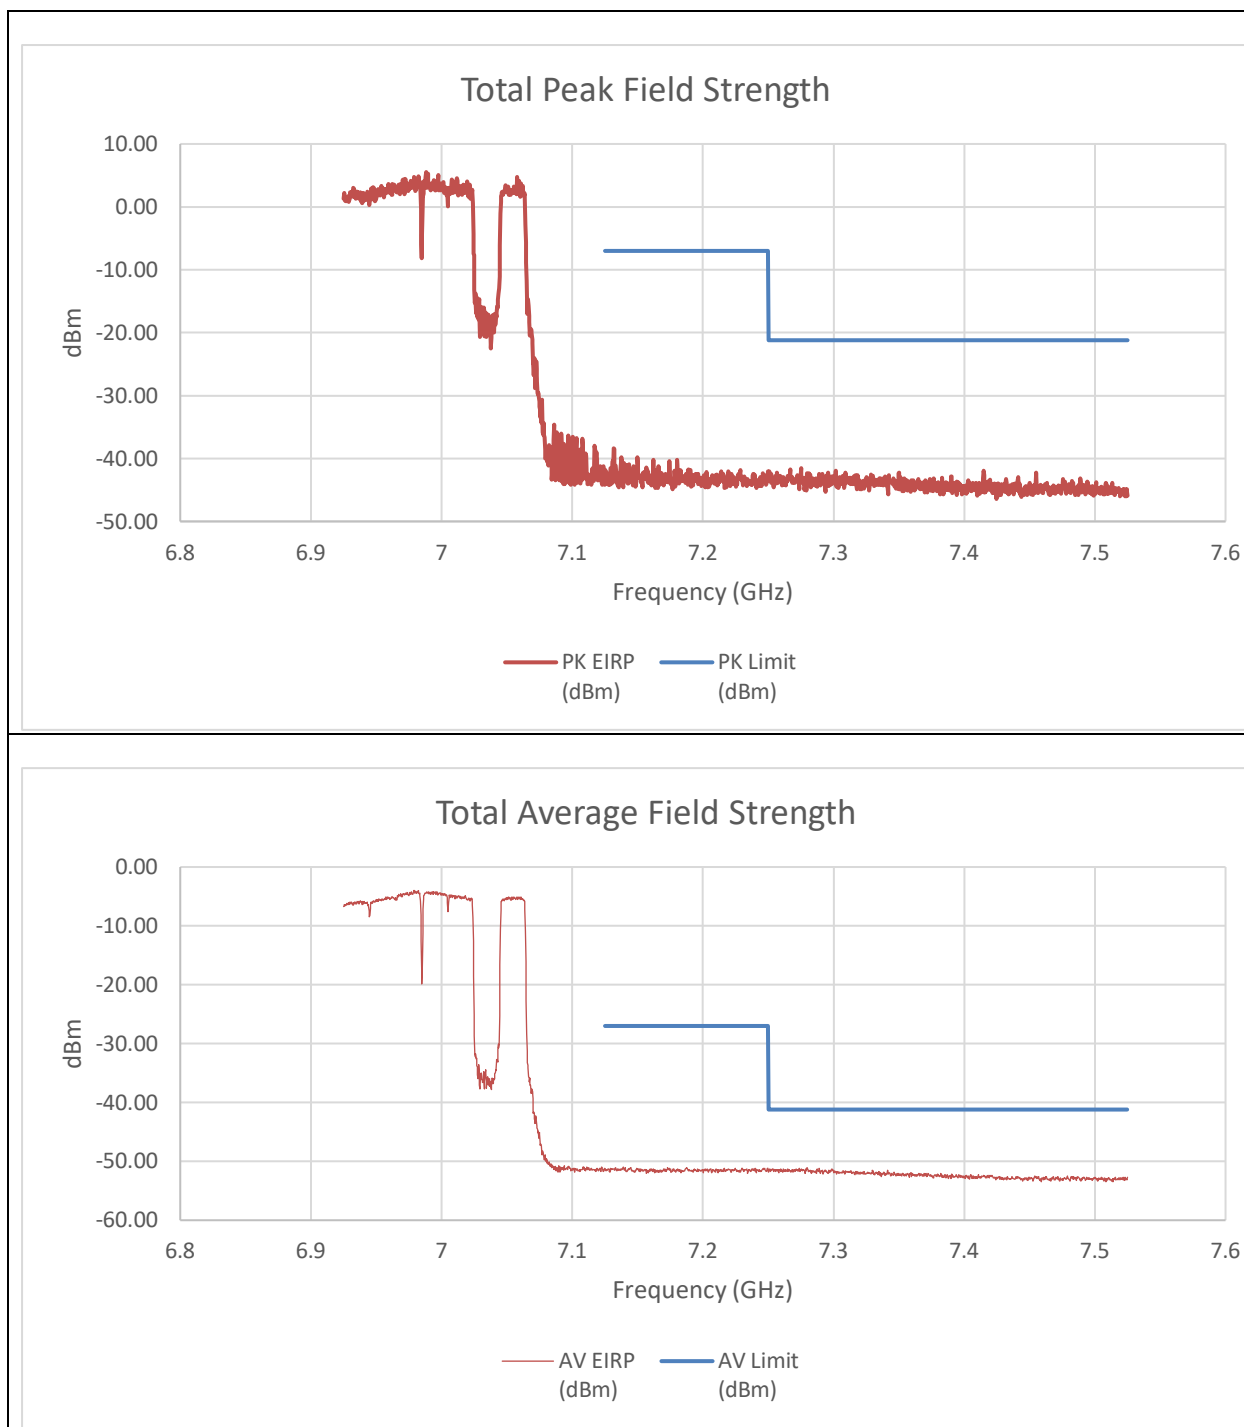


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-57.78	-56.82	-43.95	-7.00	-36.95
7.25	-56.42	-54.46	-42.01	-21.20	-20.81
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-65.21	-64.75	-51.65	-27.00	-24.65
7.25	-65.25	-64.17	-51.36	-41.20	-10.16

An array gain of 10.31 dBi was used in the final calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6985MHz) – 996T+242T+484T(NON-CONTIGUOUS)
LOW POWER INDOOR

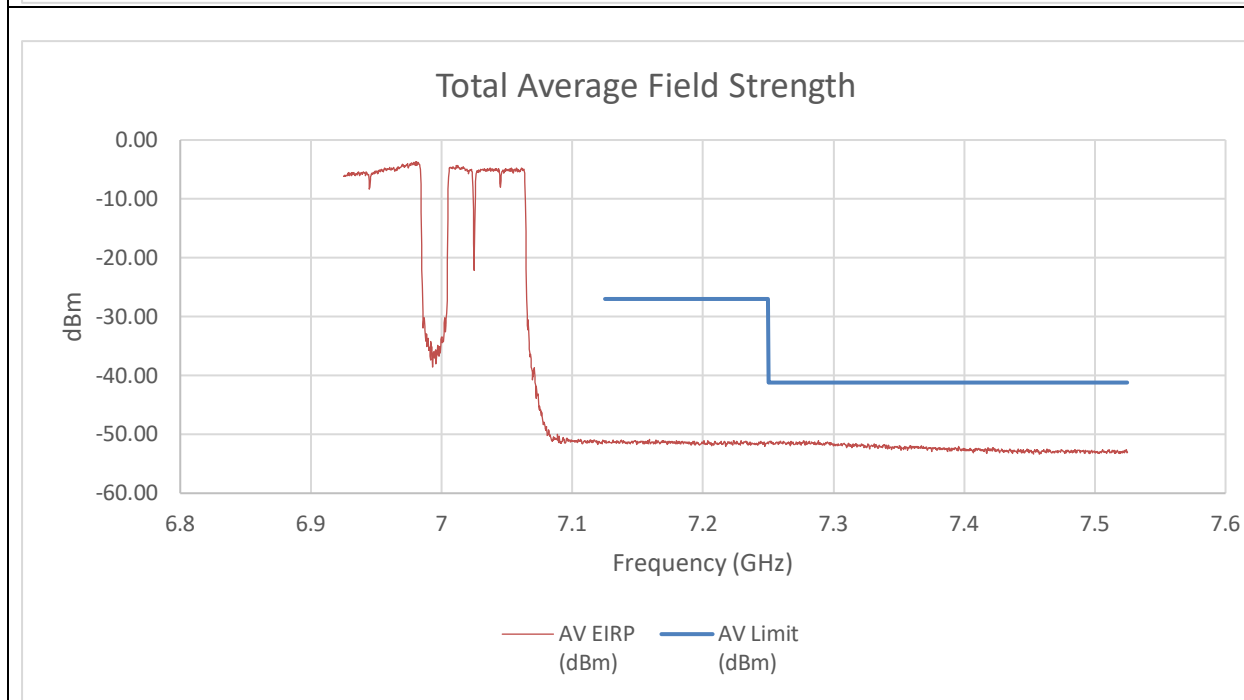
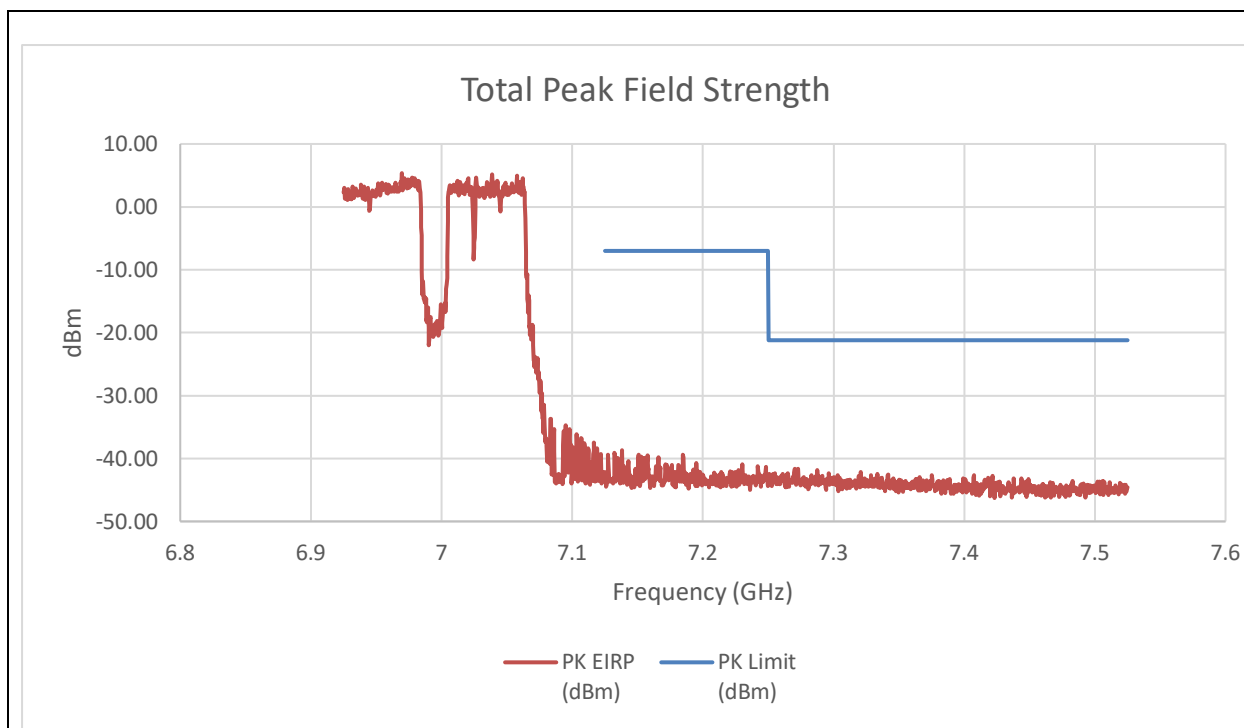


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-58.33	-57.33	-44.48	-7.00	-37.48
7.25	-56.93	-54.83	-42.43	-21.20	-21.23
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-64.94	-64.66	-51.48	-27.00	-24.48
7.25	-64.89	-64.32	-51.28	-41.20	-10.08

An array gain of 10.31 dBi was used in the final calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6985MHz) – 996T+242T+484T(NON-CONTIGUOUS 2)
LOW POWER INDOOR

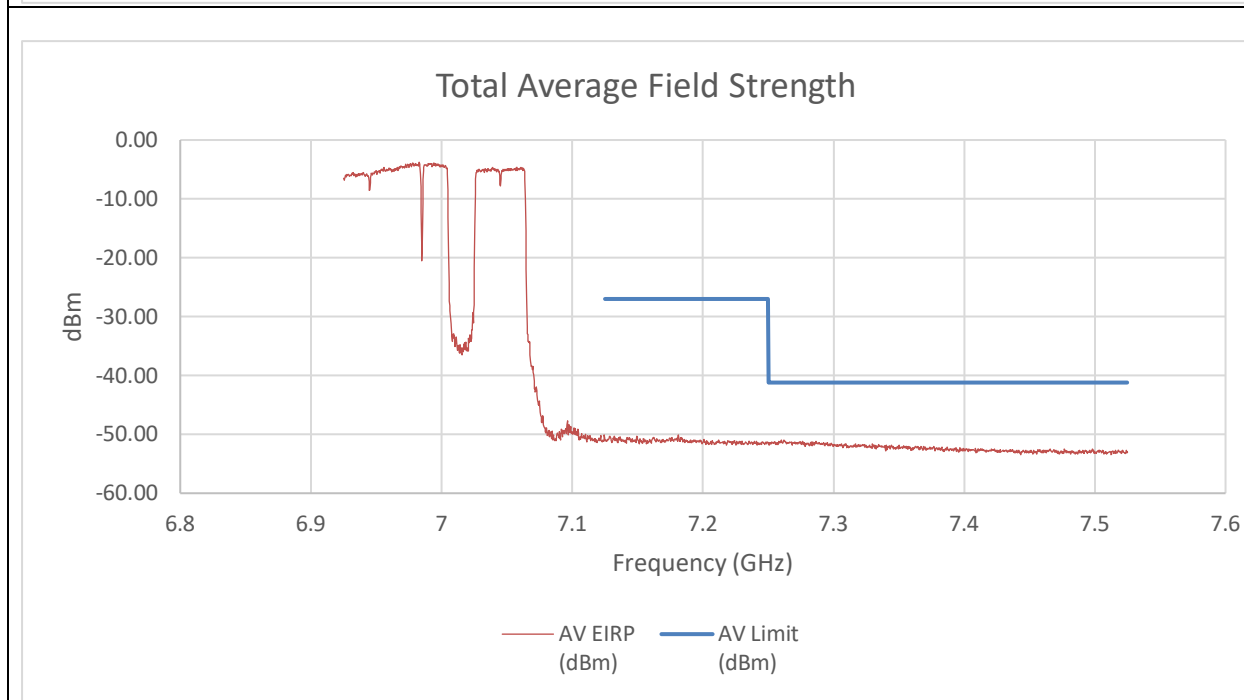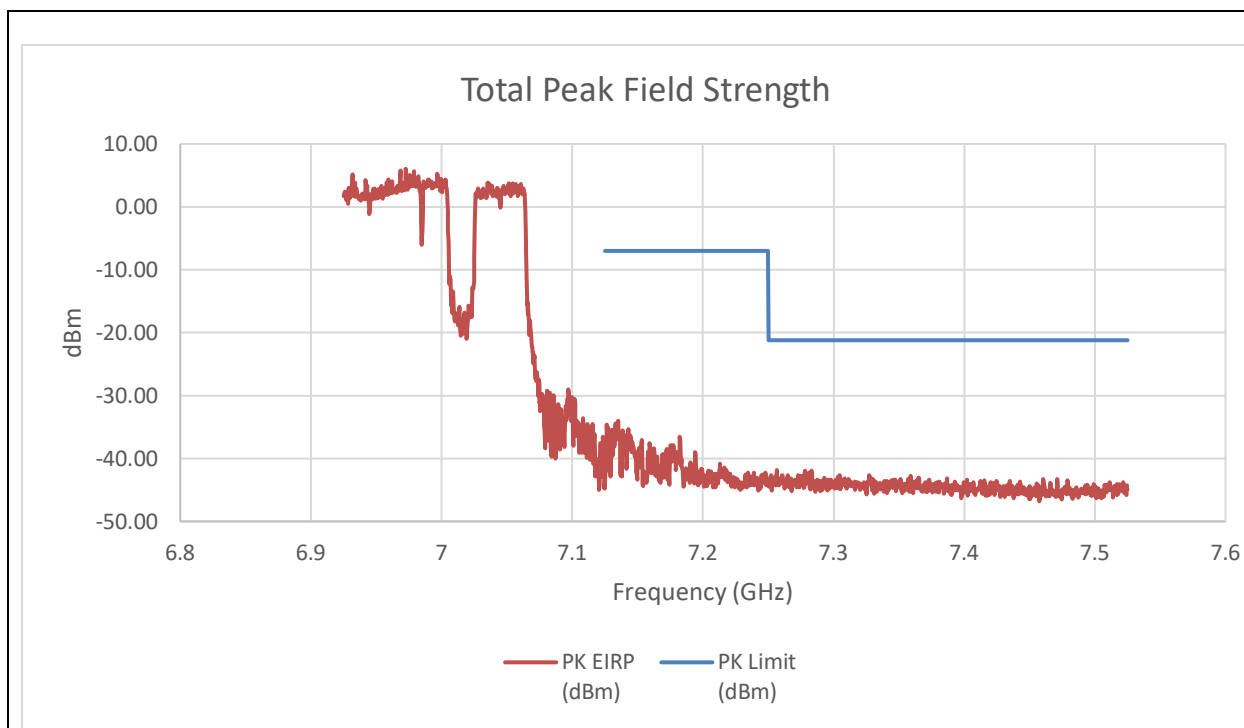


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-54.77	-54.75	-41.44	-7.00	-34.44
7.25	-57.10	-58.57	-44.45	-21.20	-23.25
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-64.30	-64.60	-51.13	-27.00	-24.13
7.25	-65.65	-64.80	-51.88	-41.20	-10.68

An array gain of 10.31 dBi was used in the final calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6985MHz) – 2x996T LOW POWER INDOOR

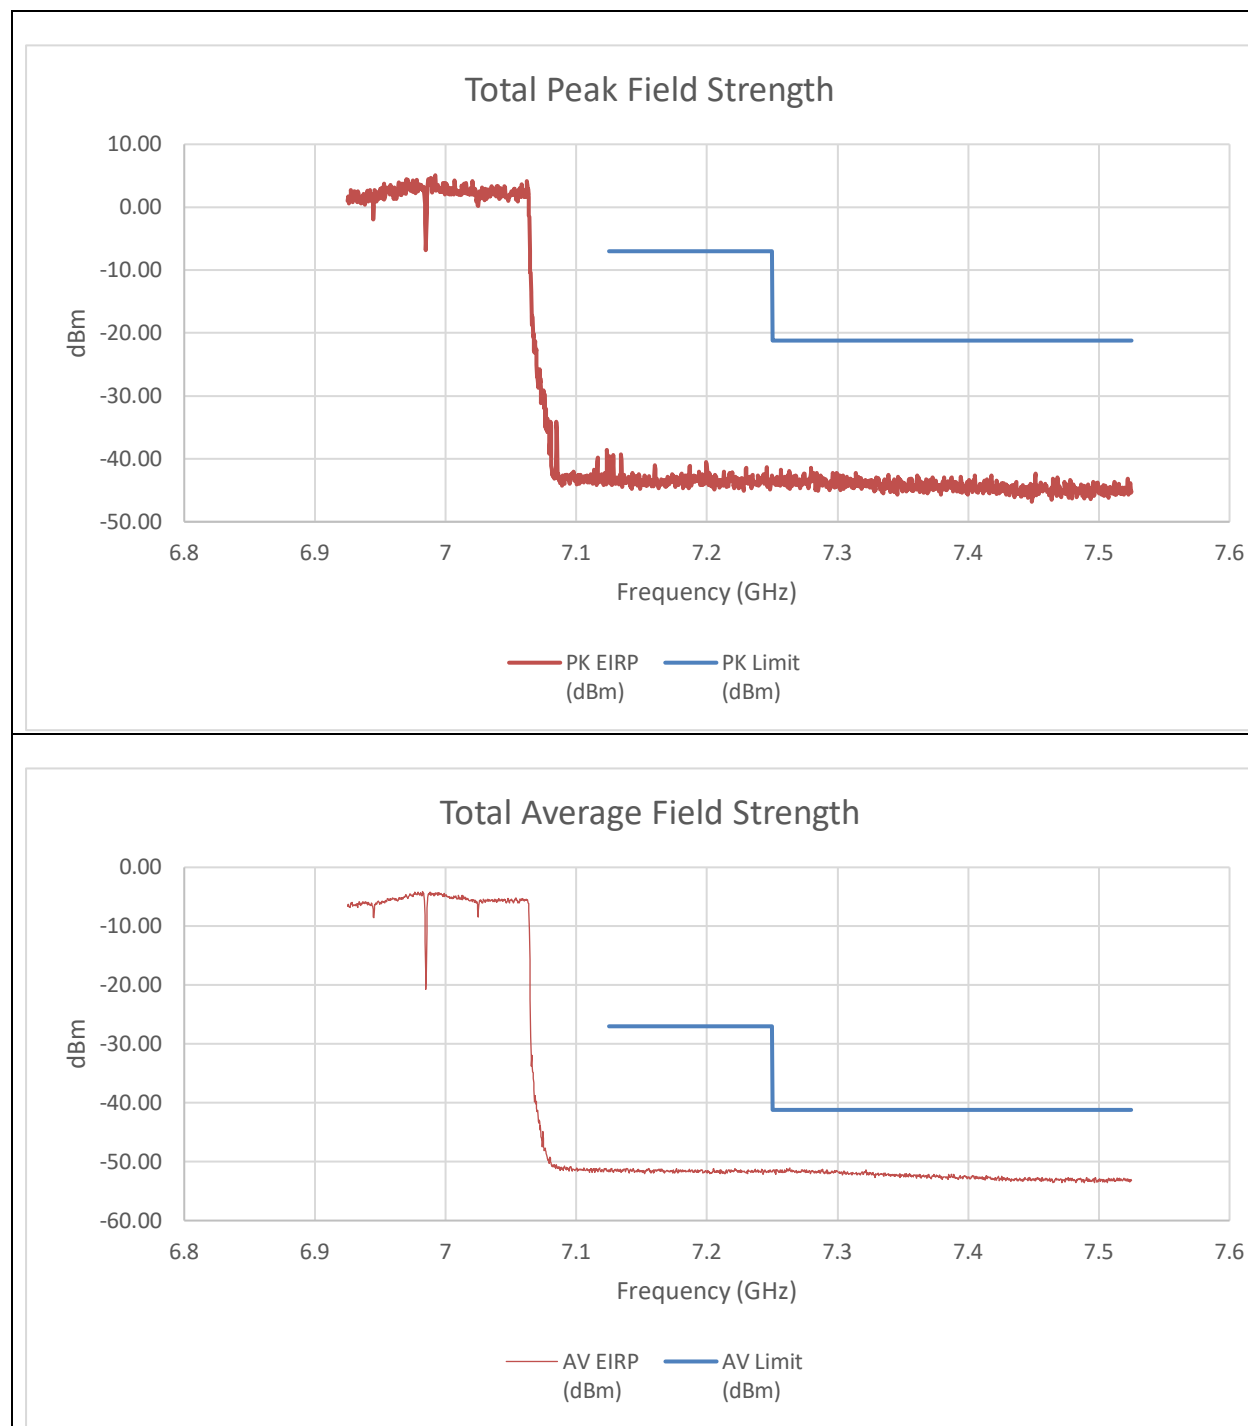


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-56.93	-55.99	-43.11	-7.00	-36.11
7.25	-56.41	-56.65	-43.21	-21.20	-22.01
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-65.23	-64.59	-51.58	-27.00	-24.58
7.25	-65.51	-64.06	-51.40	-41.20	-10.20

An array gain of 10.31 dBi was used in the final calculation of the summed data.

9.6.30. 802.11be EHT320 MODE 2TX IN THE UNII-8 BAND (MID GAIN)

HIGH CHANNEL RESTRICTED BAND EDGE (6905MHz) – 2x996T+484T(CONTIGUOUS) LOW POWER INDOOR

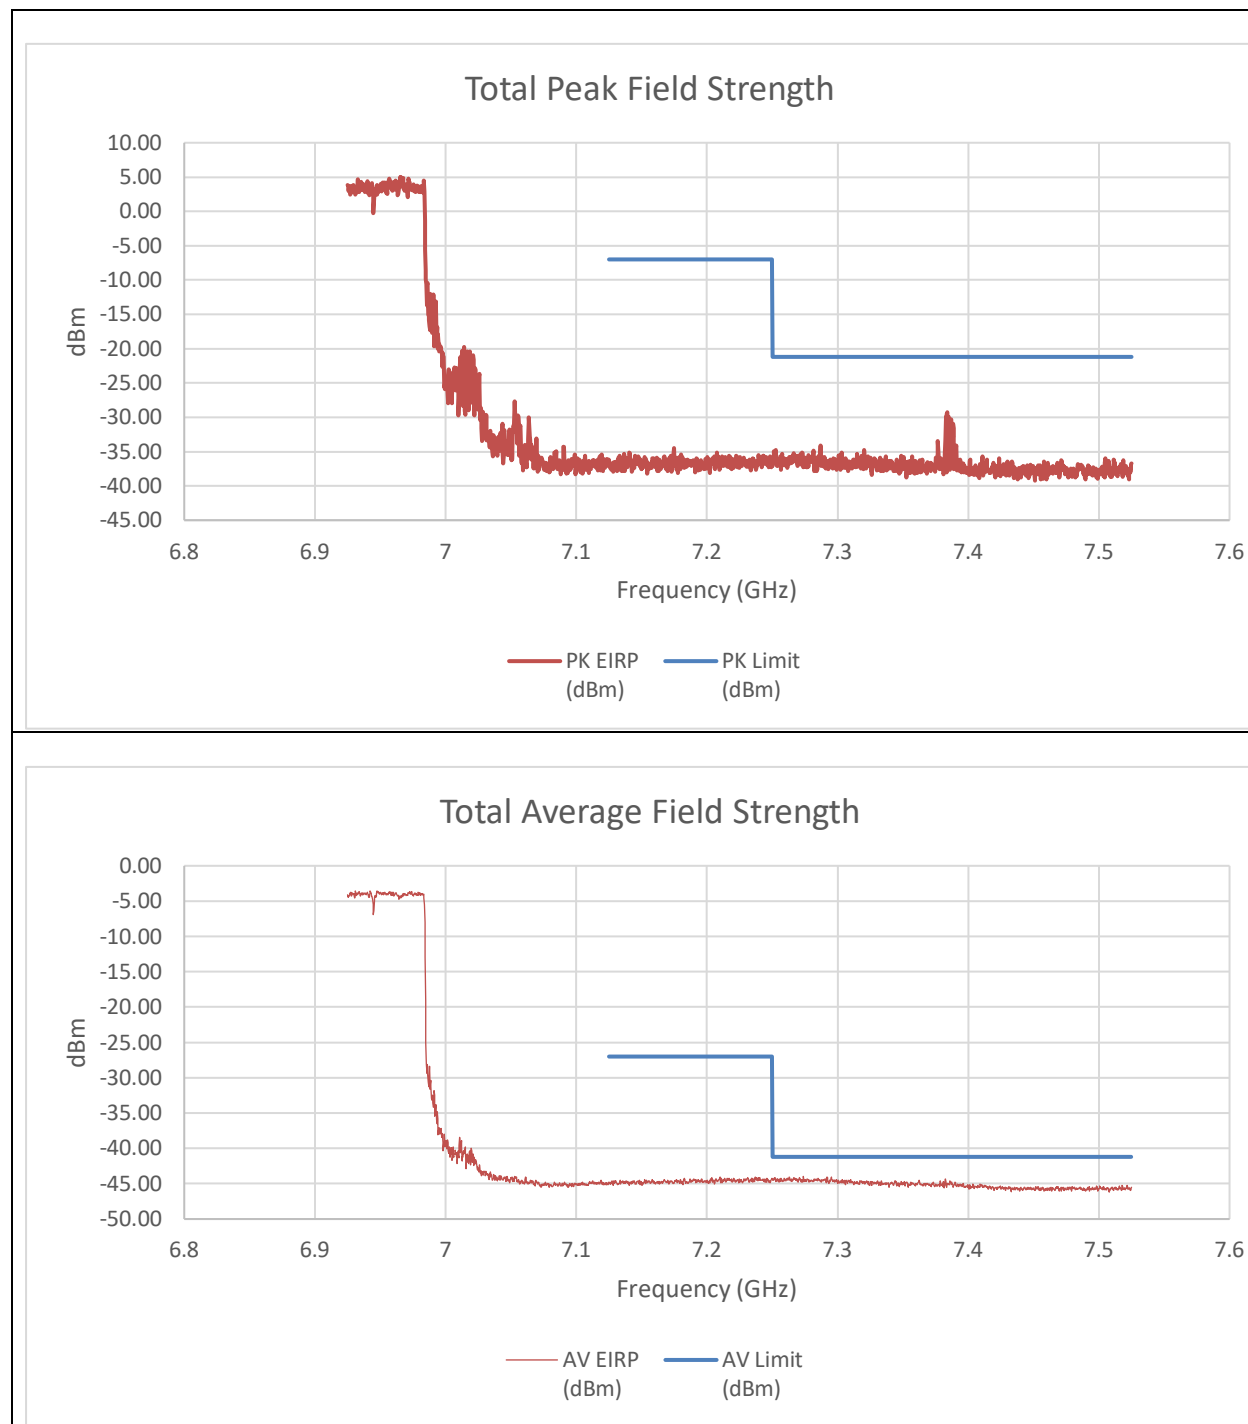


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-49.61	-51.39	-37.09	-7.00	-30.09
7.25	-48.75	-49.74	-35.90	-21.20	-14.70
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-58.30	-58.20	-44.79	-27.00	-17.79
7.25	-58.17	-57.49	-44.35	-41.20	-3.15

An array gain of 10.31 dBi and a duty cycle correction factor of 0.14 dBm was used in the final calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6905MHz) – 2x996T+484T(NON-CONTIGUOUS) LOW POWER INDOOR

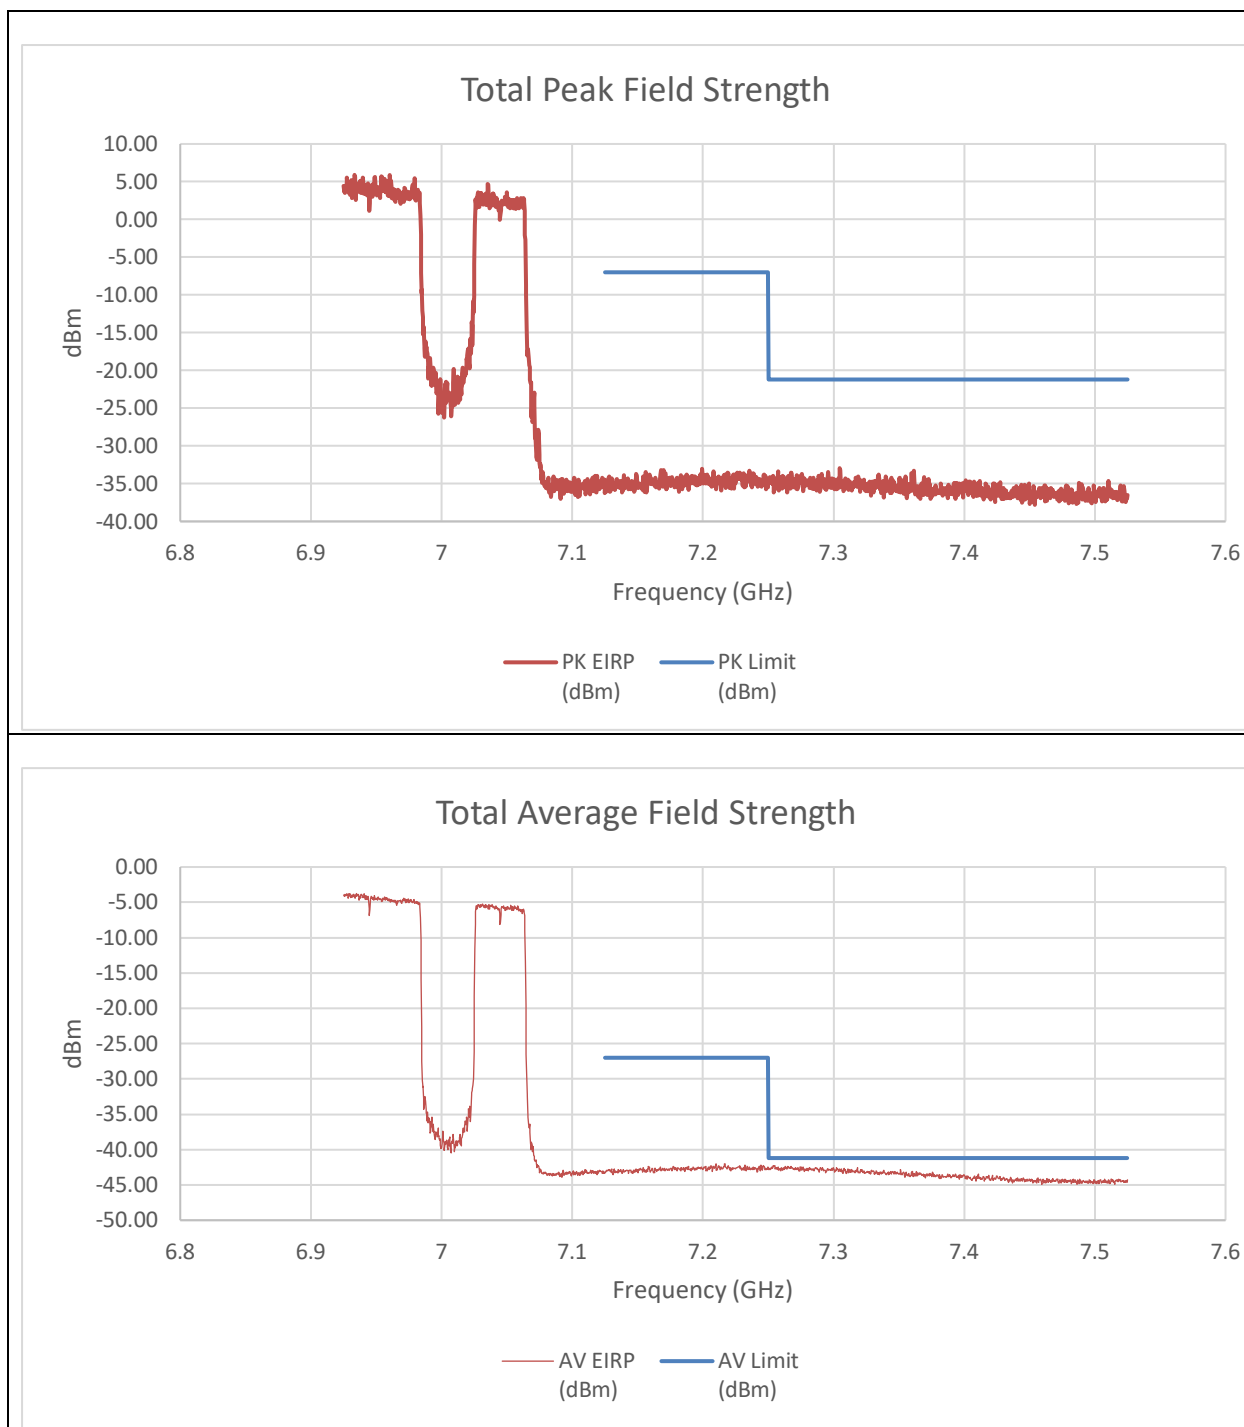


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-49.36	-49.39	-36.05	-7.00	-29.05
7.25	-47.87	-48.40	-34.81	-21.20	-13.61
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-56.17	-56.82	-43.02	-27.00	-16.02
7.25	-56.10	-56.53	-42.85	-41.20	-1.65

An array gain of 10.31 dBi and a duty cycle correction factor of 0.14 dBm was used in the final calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6905MHz) – 484T+2x996T(NON-CONTIGUOUS) LOW POWER INDOOR

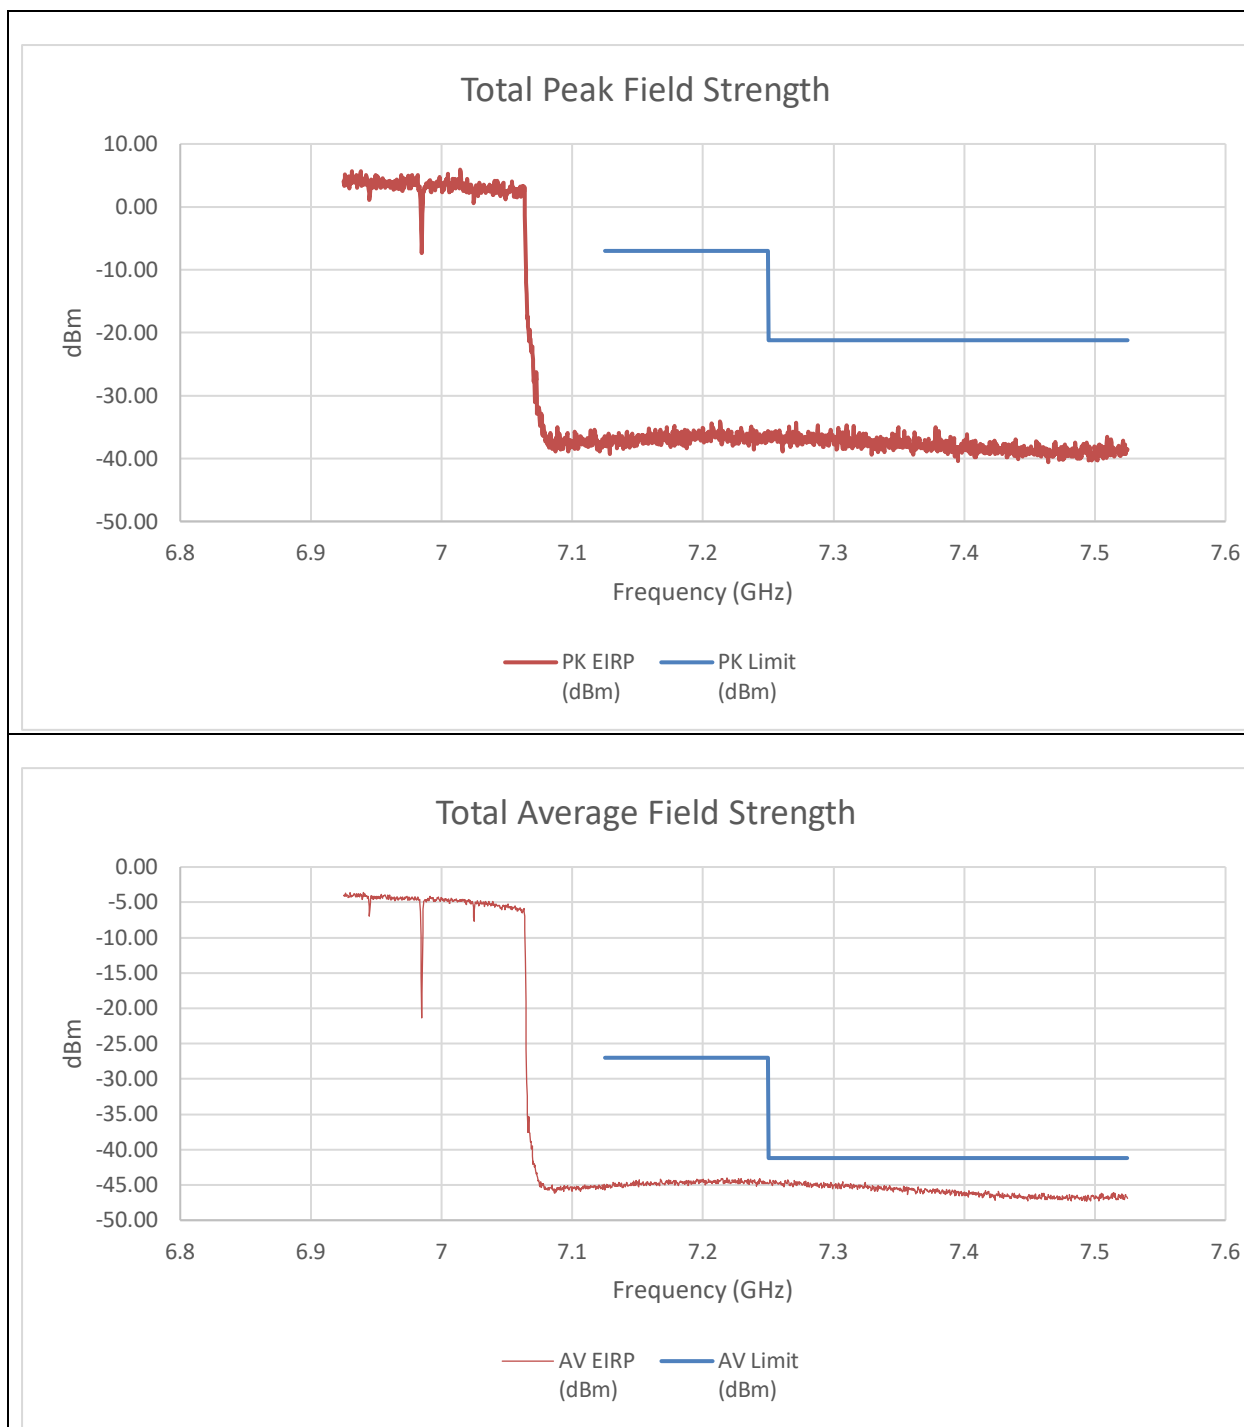


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-49.16	-55.48	-37.94	-7.00	-30.94
7.25	-47.66	-53.84	-36.41	-21.20	-15.21
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-56.72	-63.01	-45.35	-27.00	-18.35
7.25	-55.95	-62.84	-44.69	-41.20	-3.49

An array gain of 10.31 dBi and a duty cycle correction factor of 0.14 dBm was used in the final calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6905MHz) – 996T+484T+996T(NON-CONTIGUOUS)
LOW POWER INDOOR

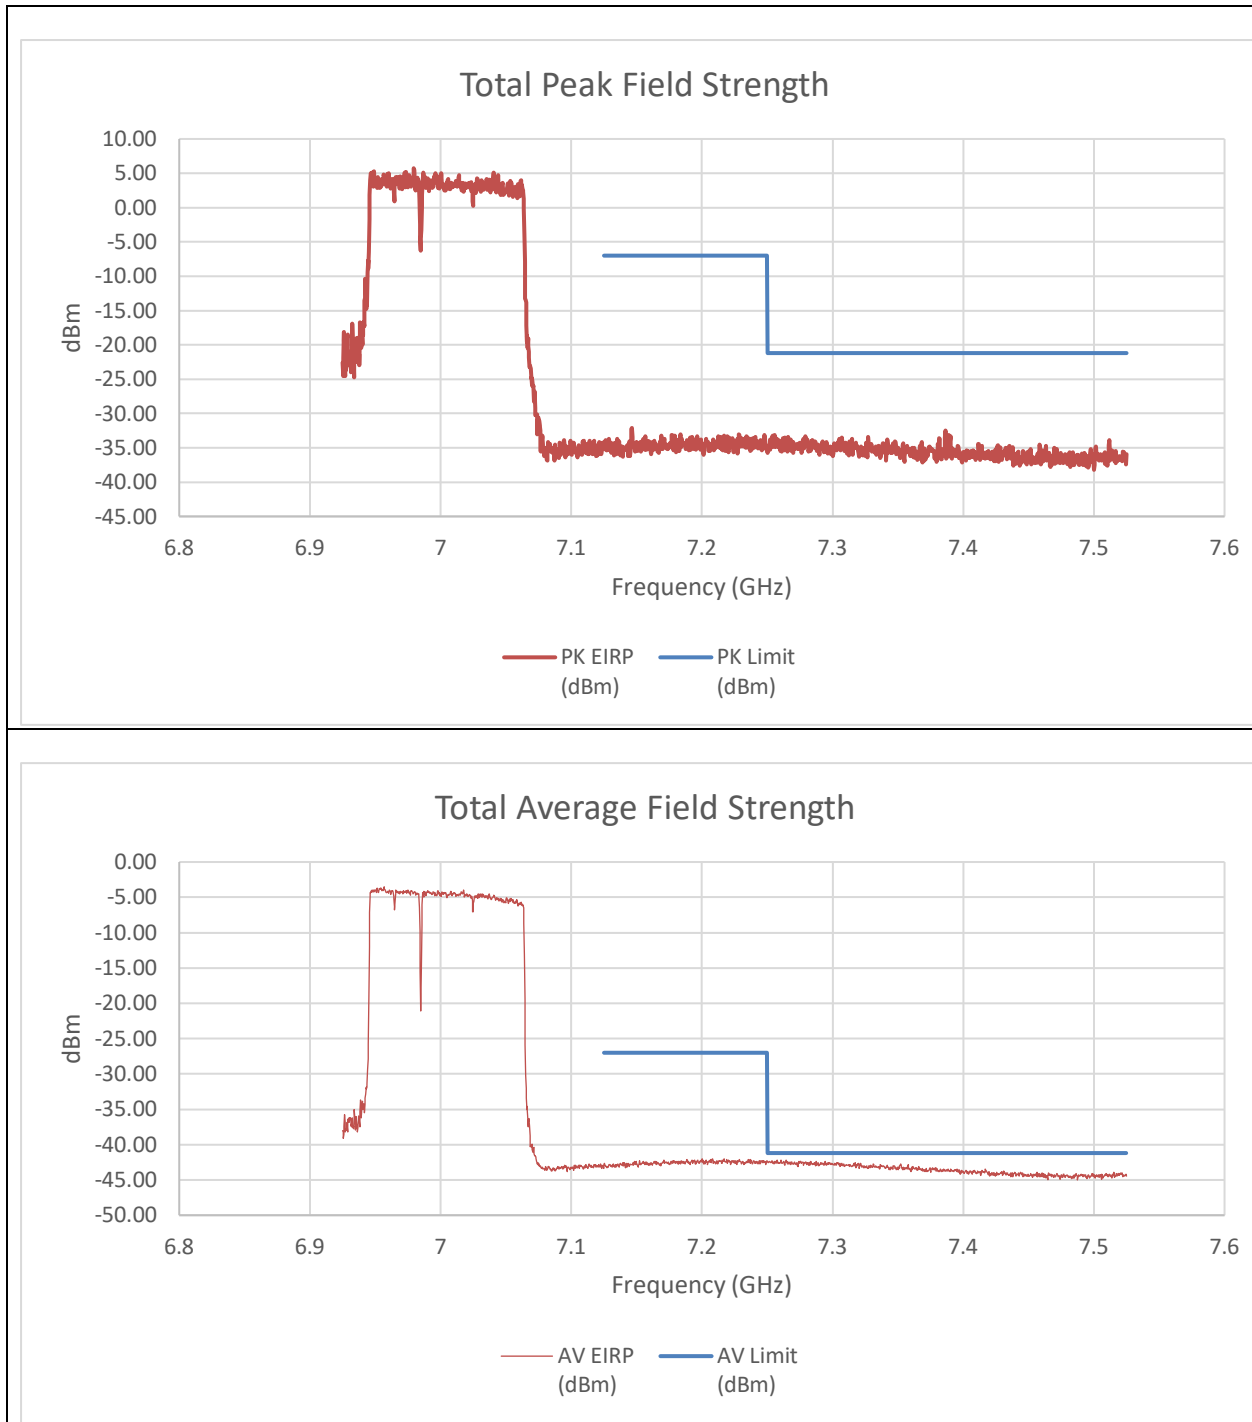


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-47.14	-47.71	-34.10	-7.00	-27.10
7.25	-48.42	-47.79	-34.77	-21.20	-13.57
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-56.13	-56.92	-43.05	-27.00	-16.05
7.25	-56.07	-56.05	-42.60	-41.20	-1.40

An array gain of 10.31 dBi and a duty cycle correction factor of 0.14 dBm was used in the final calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6905MHz) – 996T+484T+996T(NON-CONTIGUOUS 2)
LOW POWER INDOOR

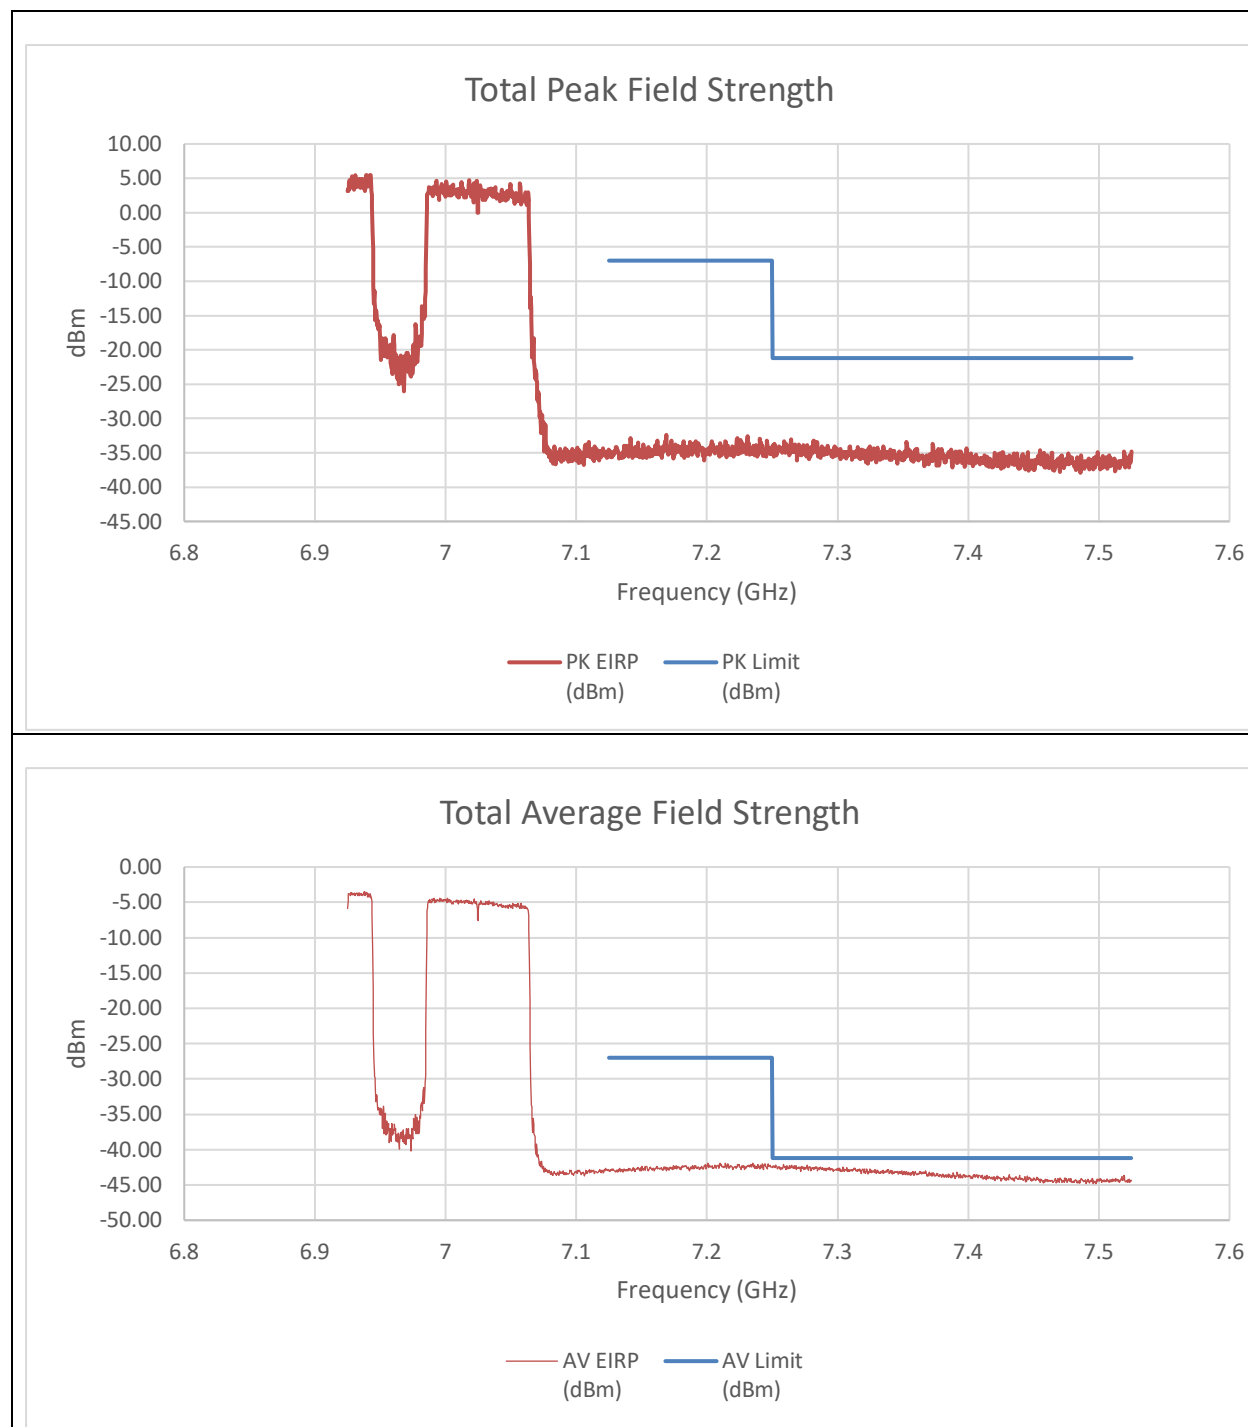


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-47.45	-49.35	-34.98	-7.00	-27.98
7.25	-47.44	-46.95	-33.87	-21.20	-12.67
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-56.45	-56.43	-42.98	-27.00	-15.98
7.25	-55.69	-55.85	-42.31	-41.20	-1.11

An array gain of 10.31 dBi and a duty cycle correction factor of 0.14 dBm was used in the final calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6905MHz) – 3x996T(CONTIGUOUS) LOW POWER INDOOR

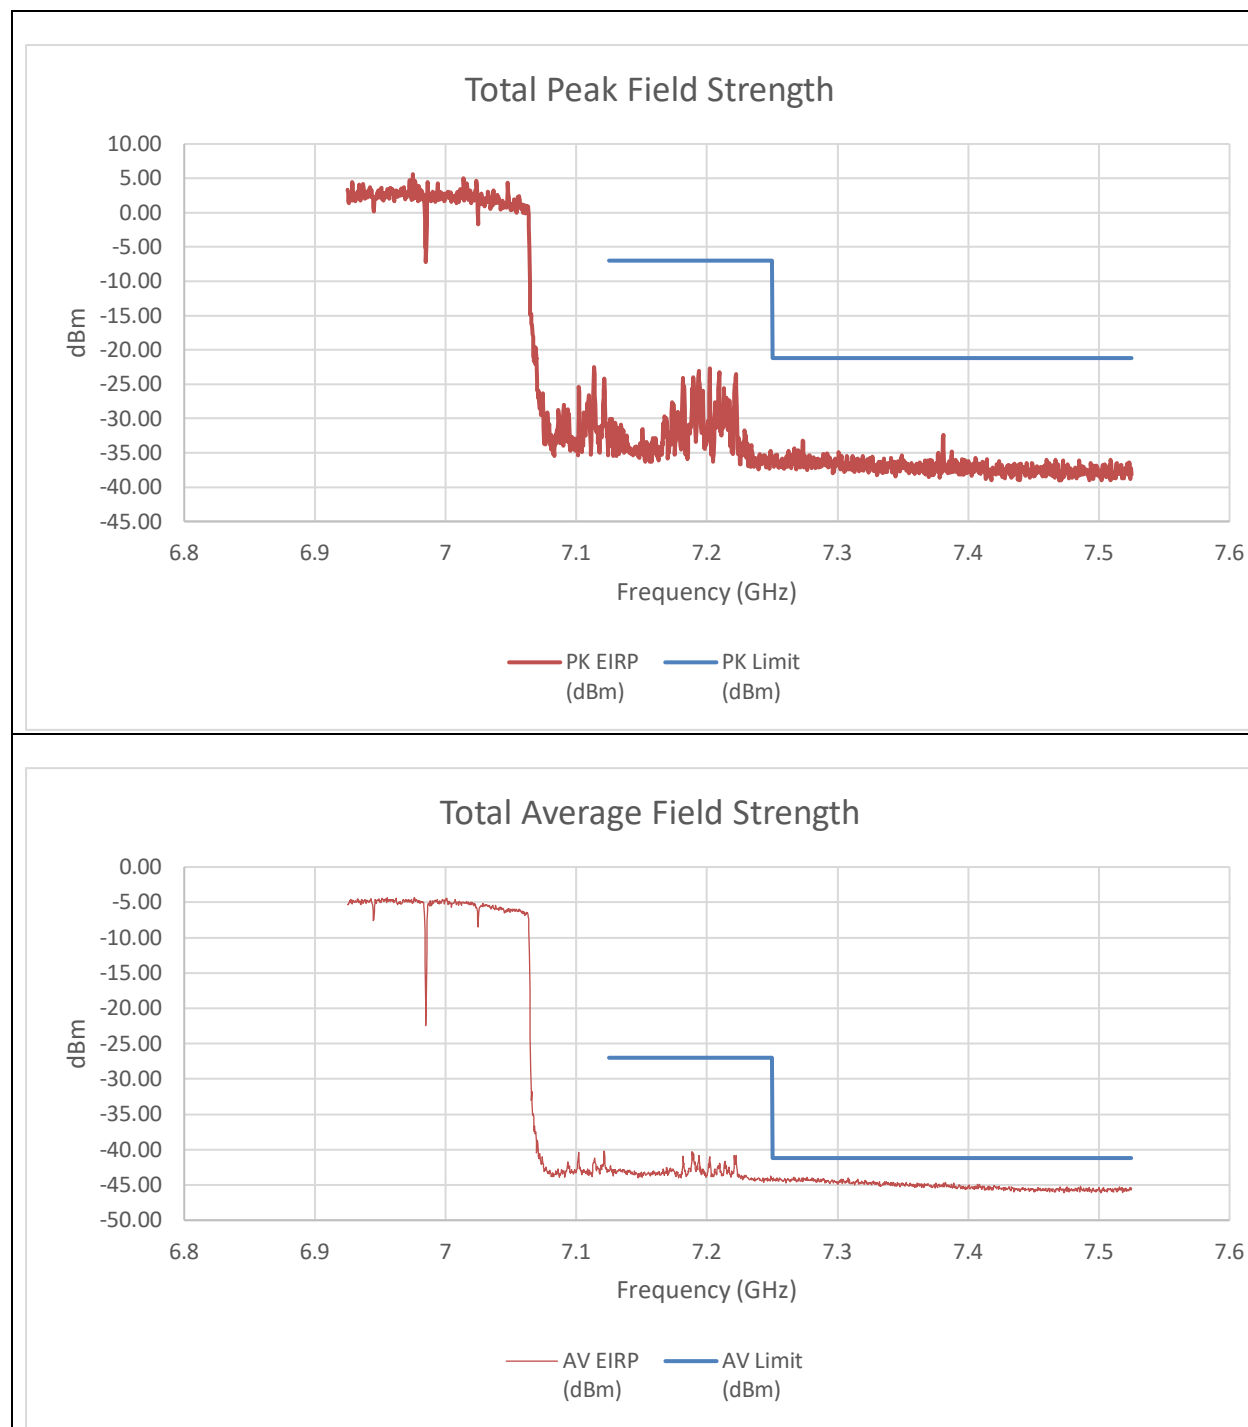


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-43.07	-43.69	-30.05	-7.00	-23.05
7.25	-49.78	-49.69	-36.41	-21.20	-15.21
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-57.59	-54.77	-42.48	-27.00	-15.48
7.25	-57.64	-57.32	-44.00	-41.20	-2.80

An array gain of 10.31 dBi and a duty cycle correction factor of 0.16 dBm was used in the final calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6905MHz) – 3x996T(NON-CONTIGUOUS) LOW POWER INDOOR

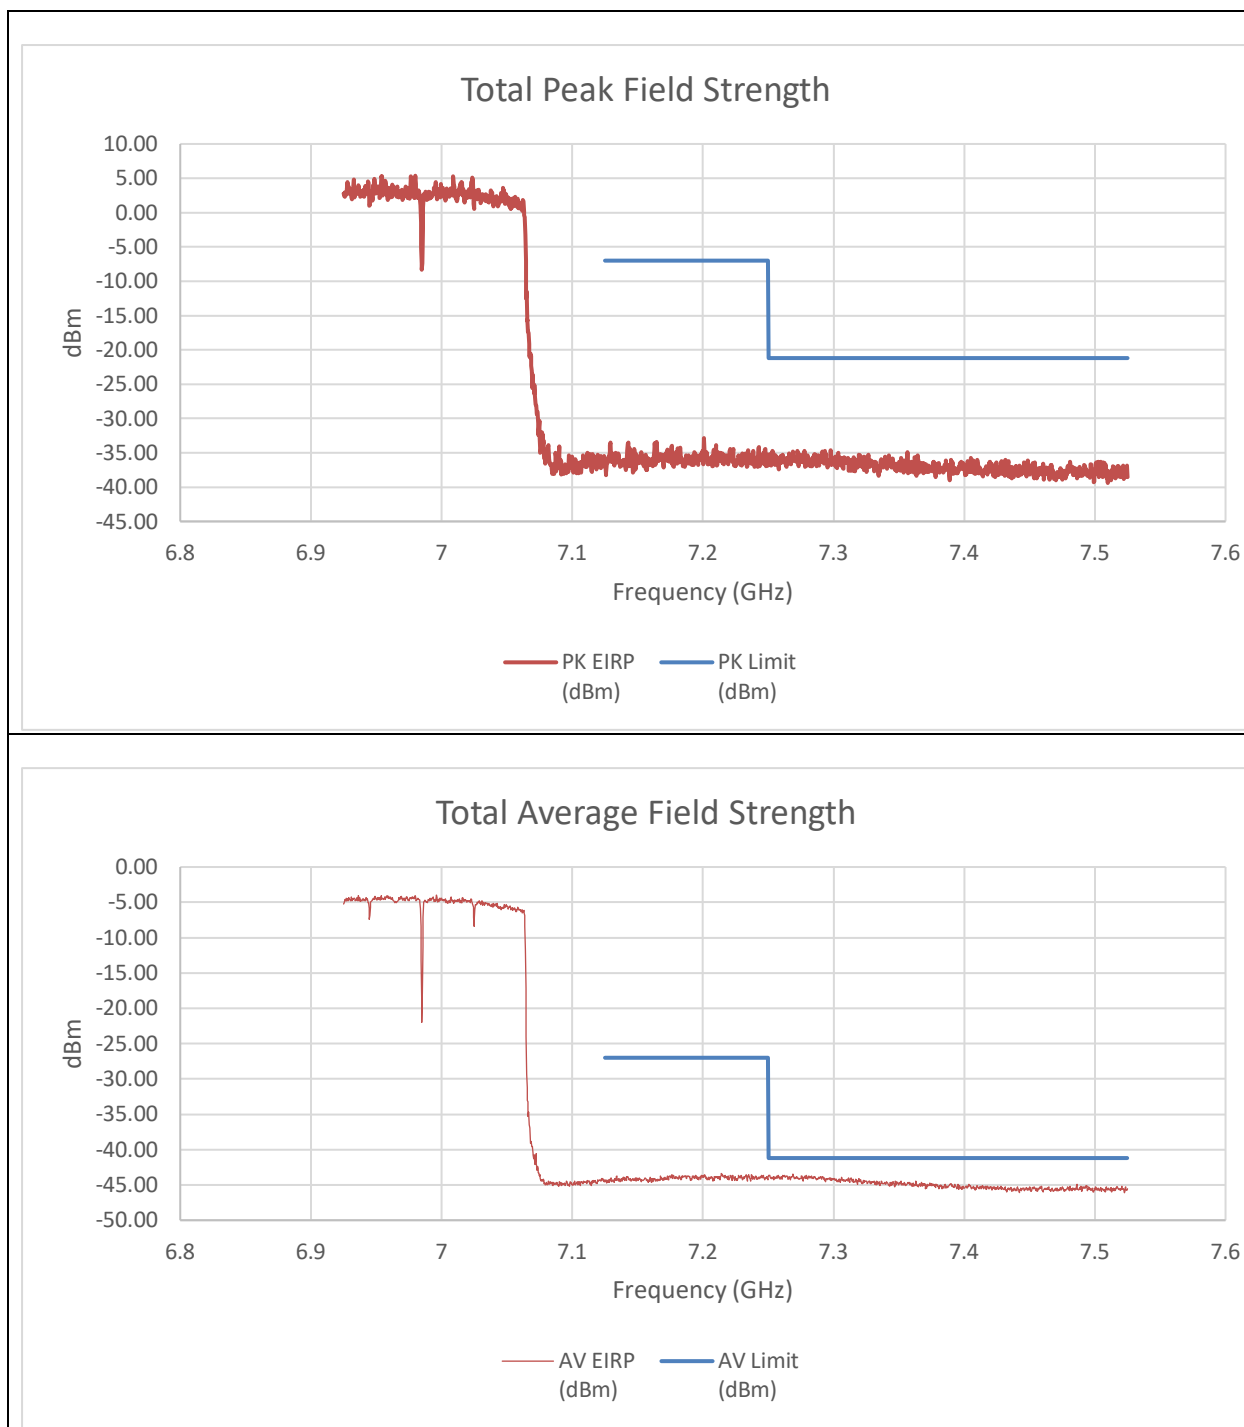


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-50.62	-51.89	-37.89	-7.00	-30.89
7.25	-50.26	-48.57	-36.01	-21.20	-14.81
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-57.92	-57.98	-44.47	-27.00	-17.47
7.25	-57.85	-56.56	-43.68	-41.20	-2.48

An array gain of 10.31 dBi and a duty cycle correction factor of 0.16 dBm was used in the final calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6905MHz) – 3x996T(NON-CONTIGUOUS 2) LOW POWER INDOOR

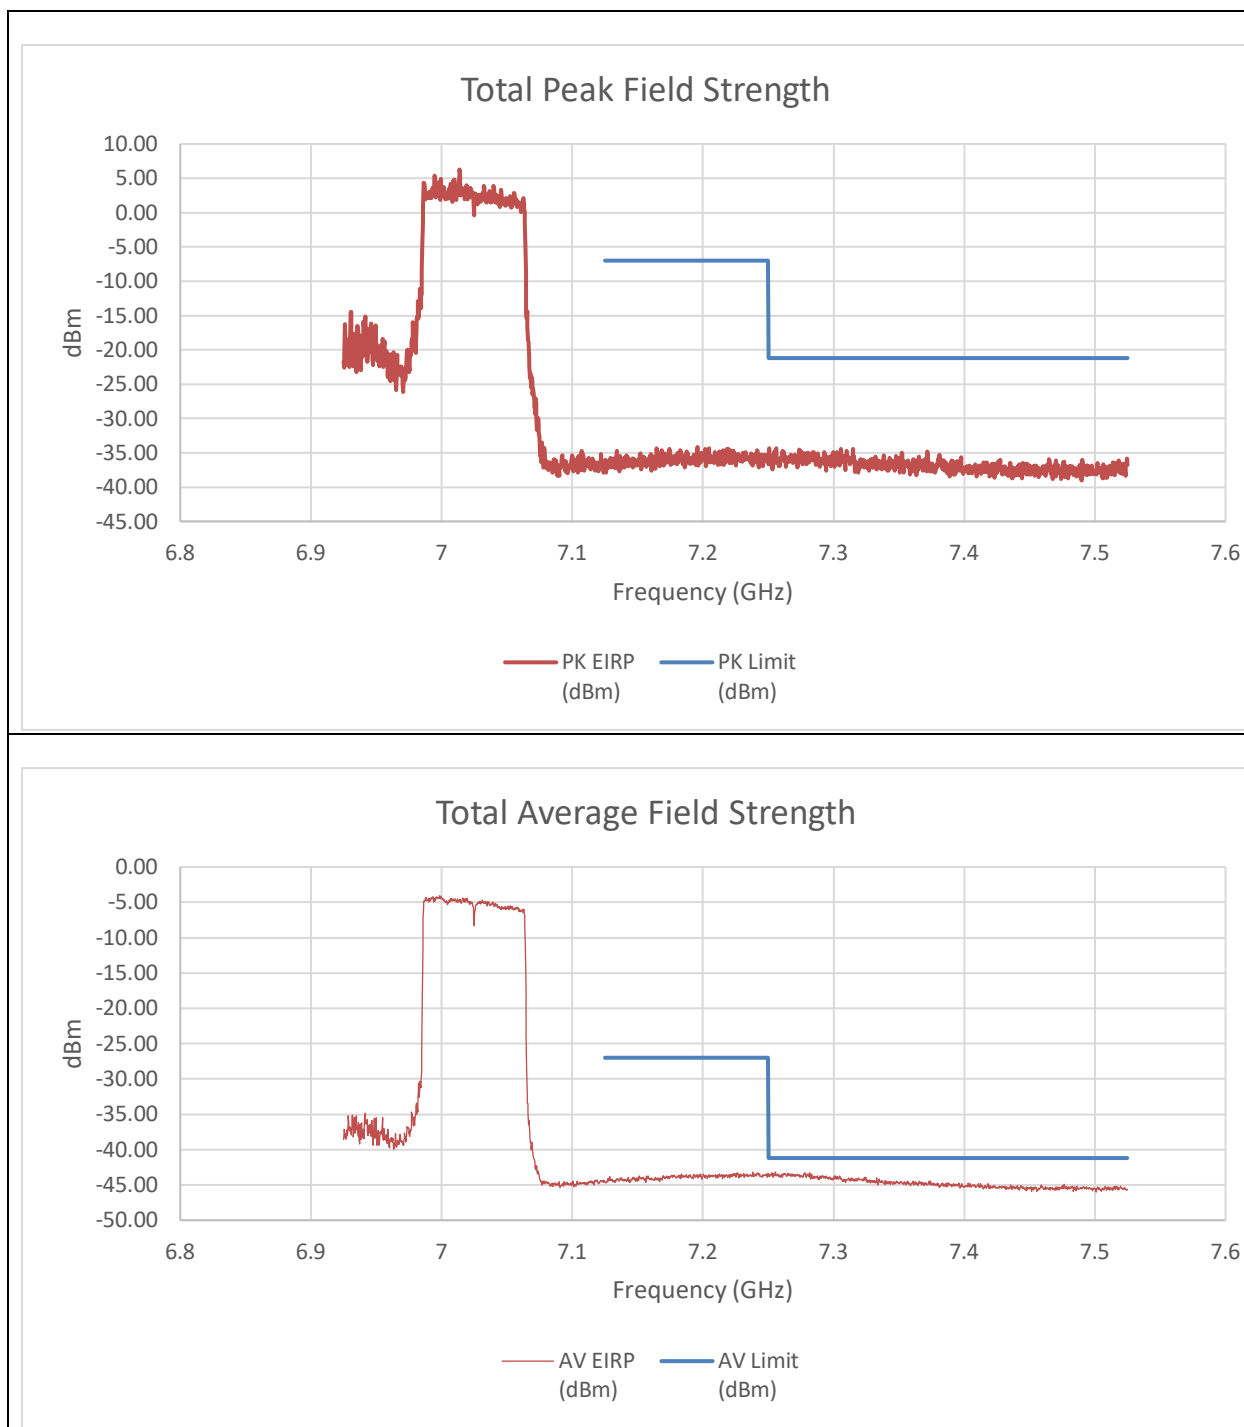


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-50.78	-51.60	-37.85	-7.00	-30.85
7.25	-47.08	-48.26	-34.31	-21.20	-13.11
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-57.90	-58.36	-44.65	-27.00	-17.65
7.25	-57.35	-57.32	-43.86	-41.20	-2.66

An array gain of 10.31 dBi and a duty cycle correction factor of 0.16 was used in the final calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6905MHz) – 3x996T+484T(CONTIGUOUS) LOW POWER INDOOR

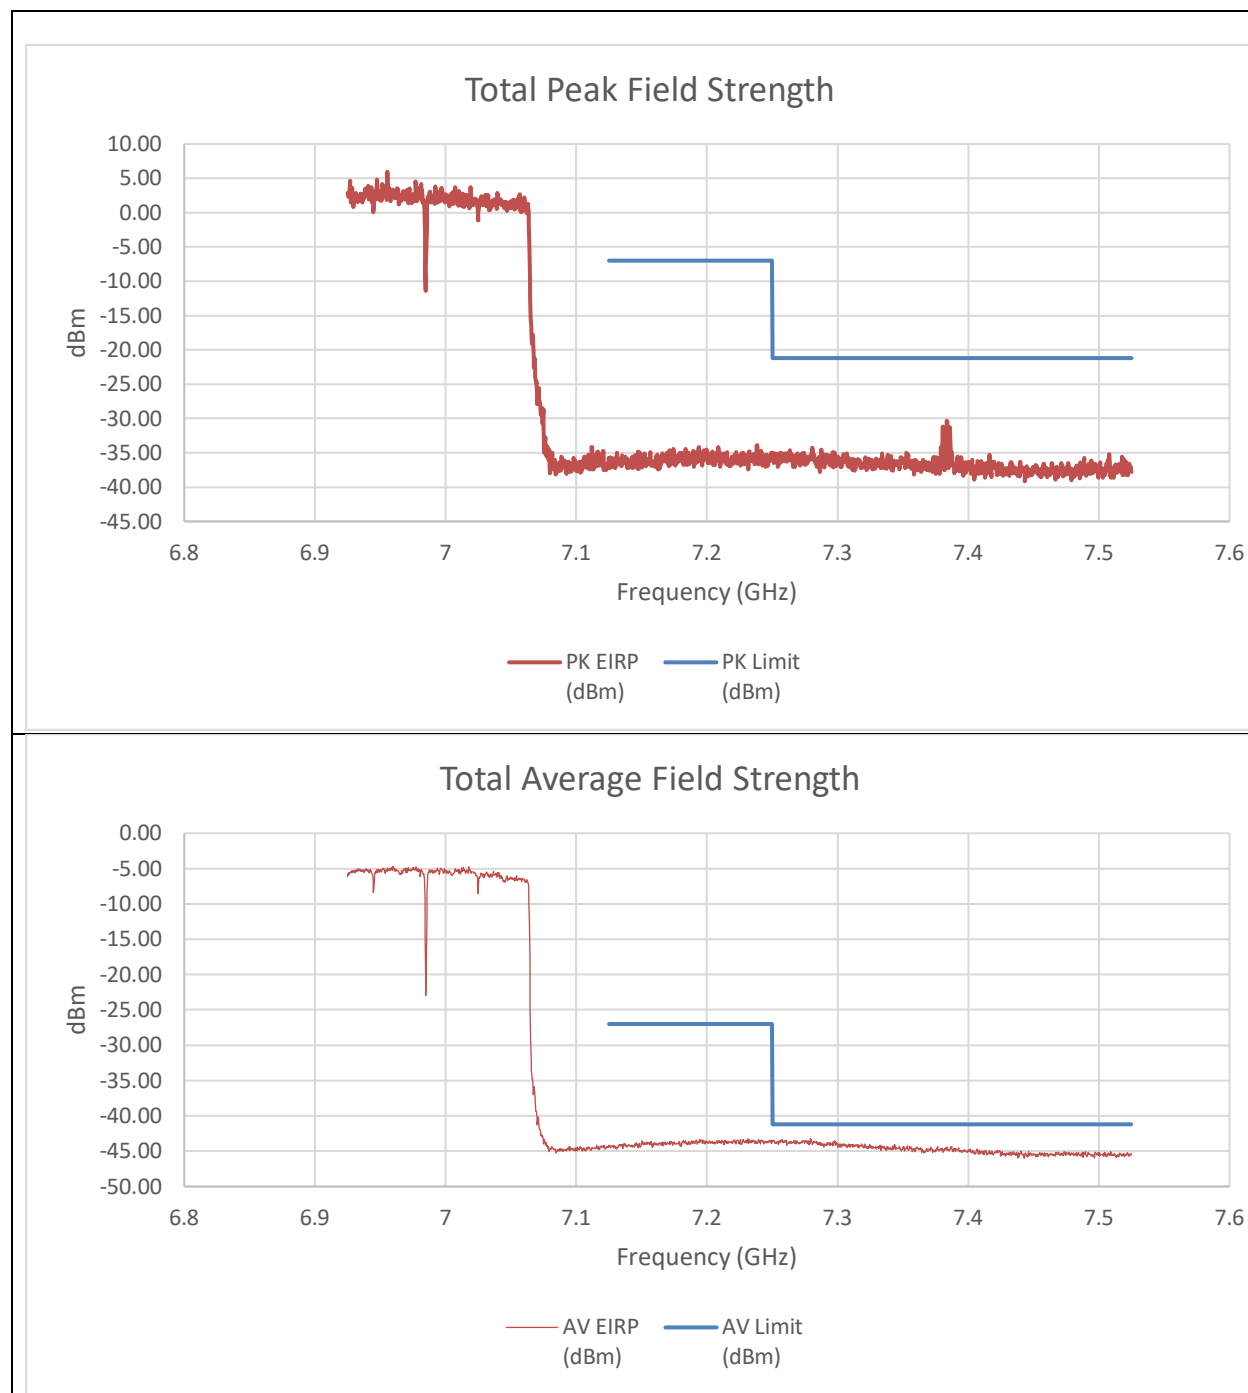


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-50.08	-49.28	-36.34	-7.00	-29.34
7.25	-49.77	-49.19	-36.15	-21.20	-14.95
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-57.84	-57.68	-44.25	-27.00	-17.25
7.25	-57.38	-56.69	-43.51	-41.20	-2.31

An array gain of 10.31 dBi and a duty cycle correction factor of 0.19 dBm was used in the final calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6905MHz) – 3x996T+484T(NON-CONTIGUOUS) LOW POWER INDOOR

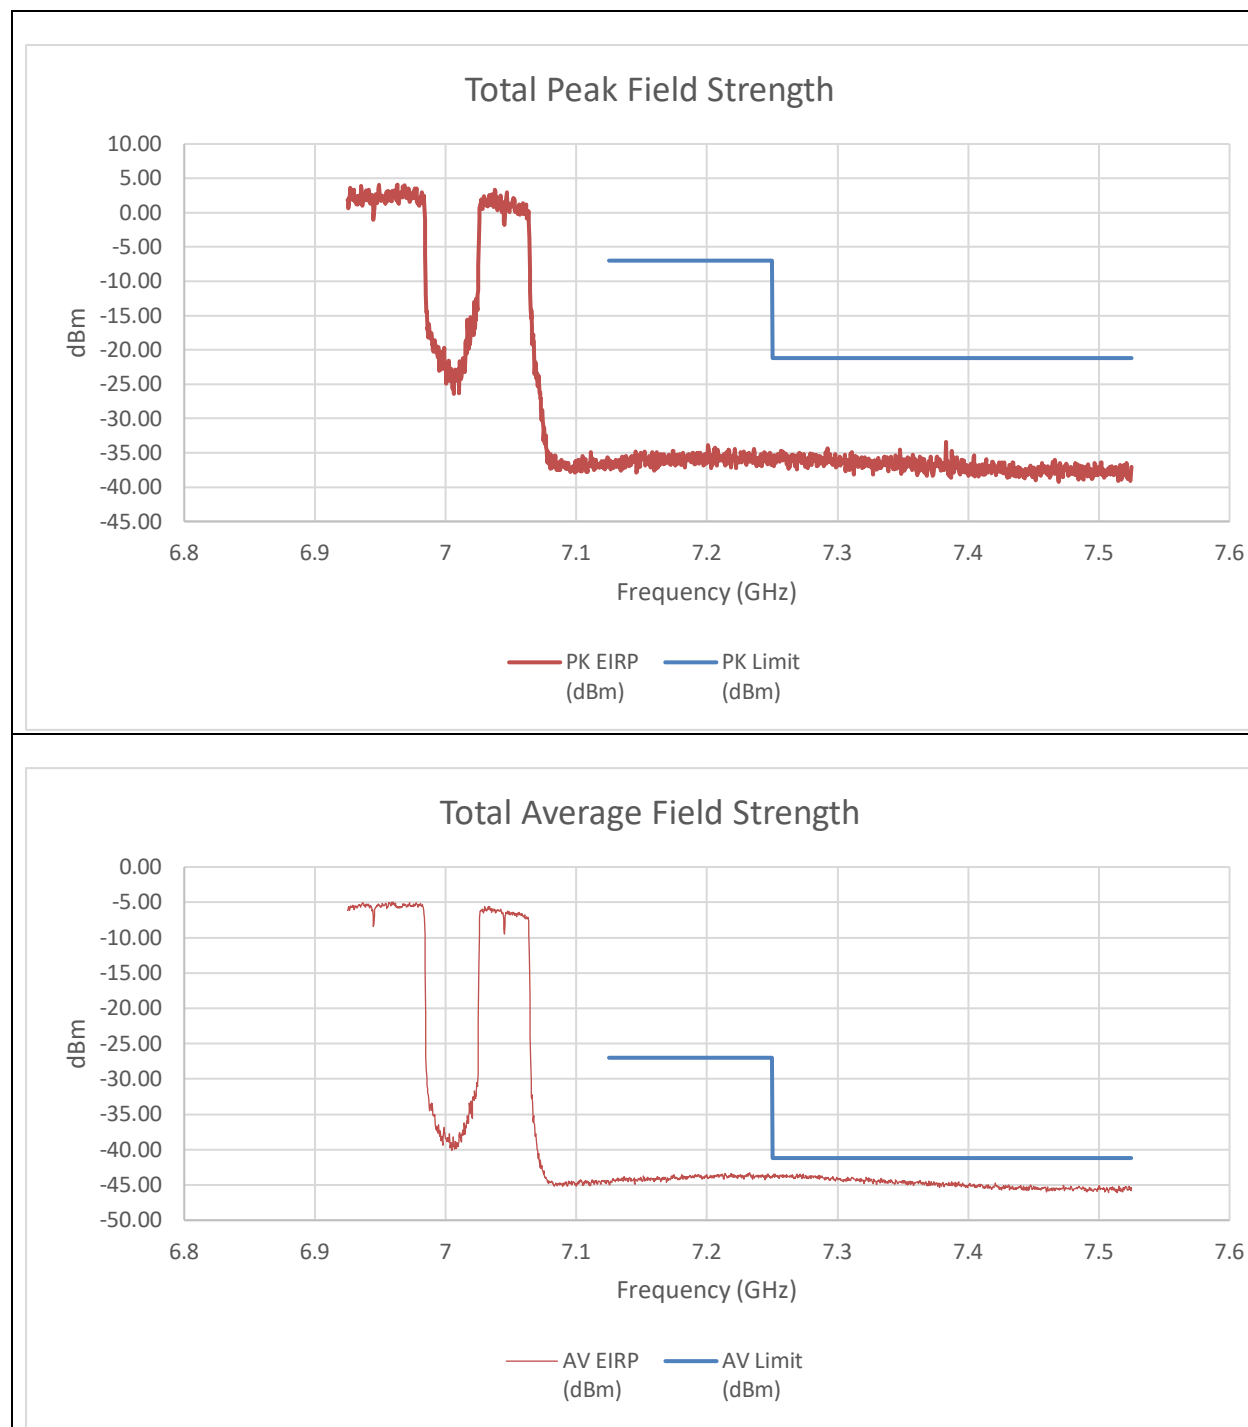


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-49.35	-50.76	-36.68	-7.00	-29.68
7.25	-49.92	-49.61	-36.44	-21.20	-15.24
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-58.13	-58.18	-44.64	-27.00	-17.64
7.25	-57.25	-57.11	-43.67	-41.20	-2.47

An array gain of 10.31 dBi and a duty cycle correction factor of 0.19 dBm was used in the final calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6905MHz) – 484T+3x996T(NON-CONTIGUOUS) LOW POWER INDOOR

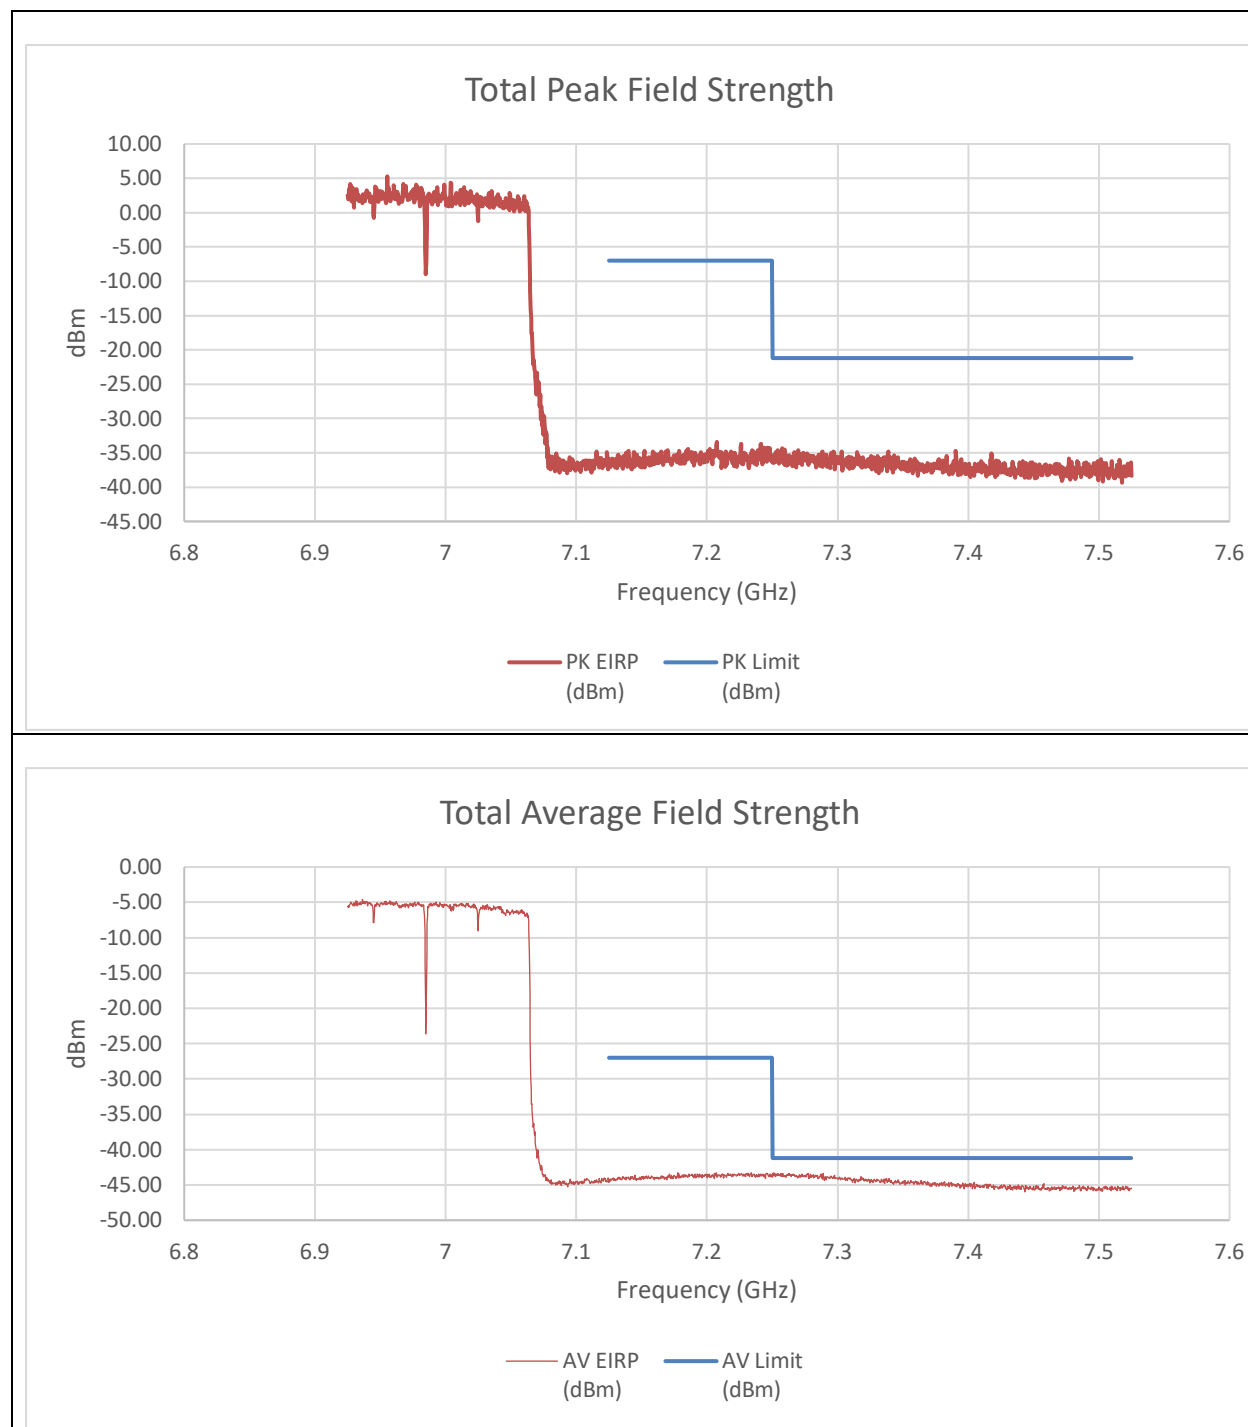


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-49.93	-49.55	-36.42	-7.00	-29.42
7.25	-49.19	-50.58	-36.51	-21.20	-15.31
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-57.80	-57.65	-44.21	-27.00	-17.21
7.25	-57.19	-56.89	-43.52	-41.20	-2.32

An array gain of 10.31 dBi and a duty cycle correction factor of 0.19 dBm was used in the final calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6905MHz) – 996T+484T+2x996T(NON-CONTIGUOUS)
LOW POWER INDOOR


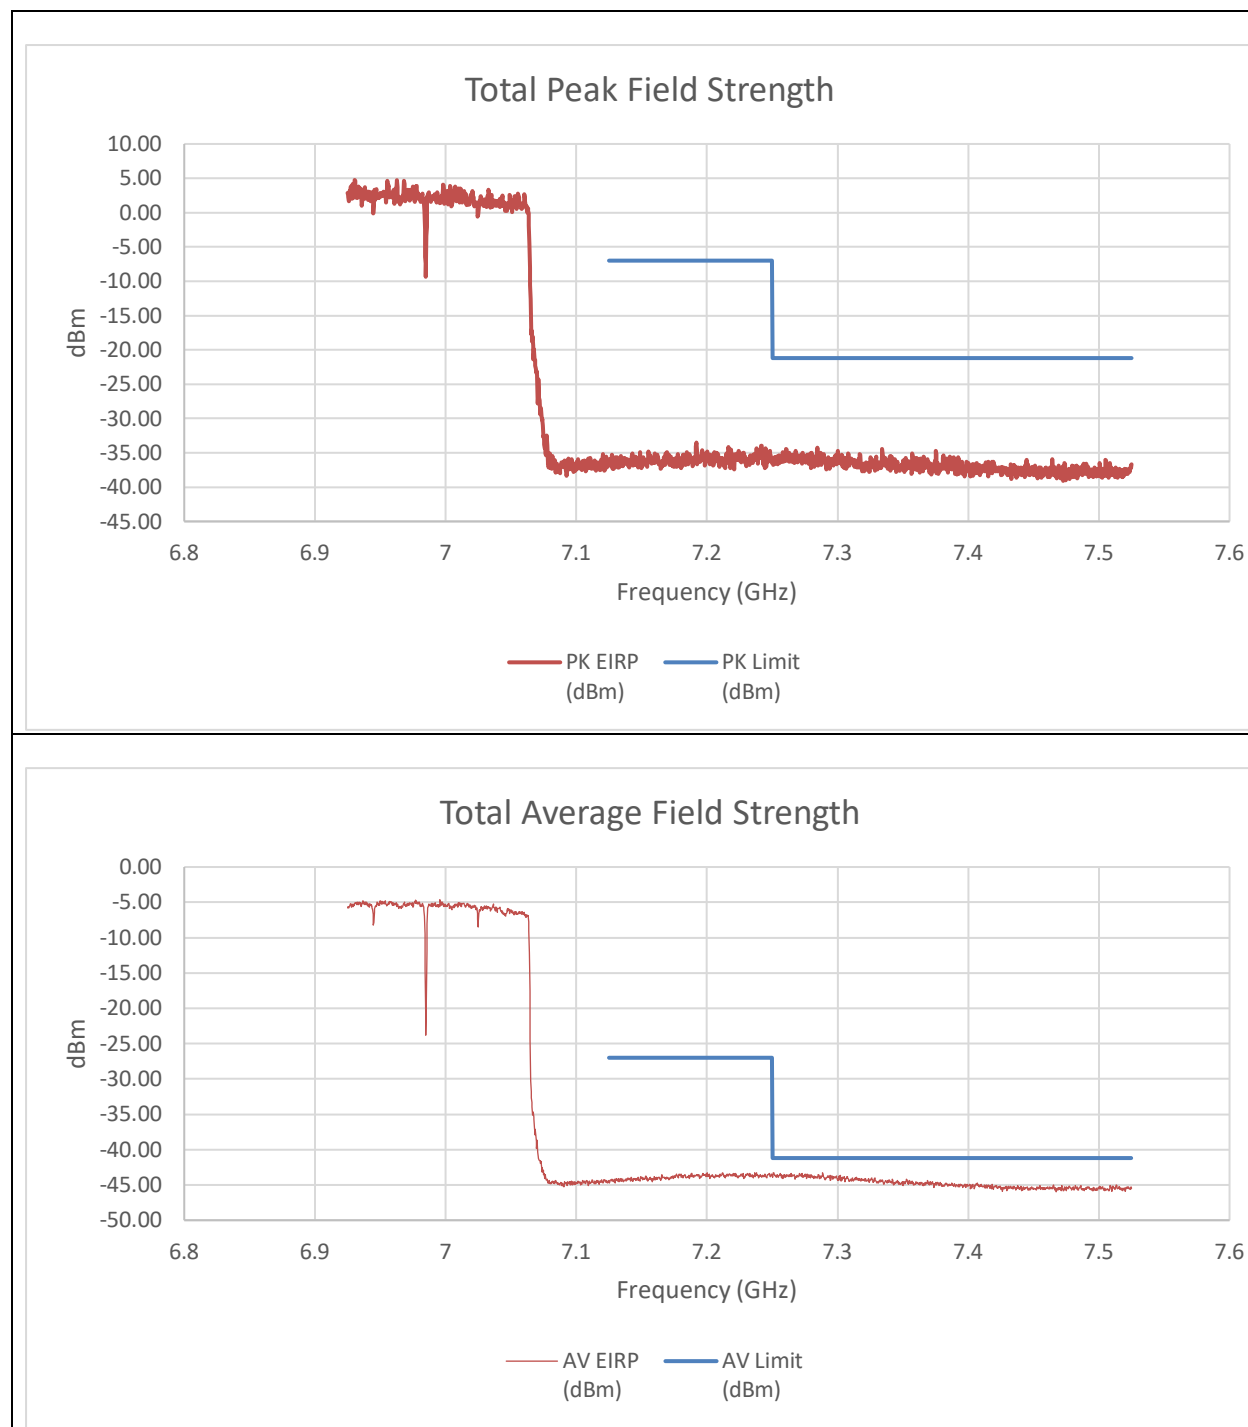


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-50.12	-50.25	-36.86	-7.00	-29.86
7.25	-49.81	-50.33	-36.74	-21.20	-15.54
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-57.96	-57.74	-44.34	-27.00	-17.34
7.25	-56.48	-57.19	-43.31	-41.20	-2.11

An array gain of 10.31 dBi and a duty cycle correction factor of 0.19 dBm was used in the final calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6905MHz) – 996T+484T+2x996T(NON-CONTIGUOUS)
2) LOW POWER INDOOR

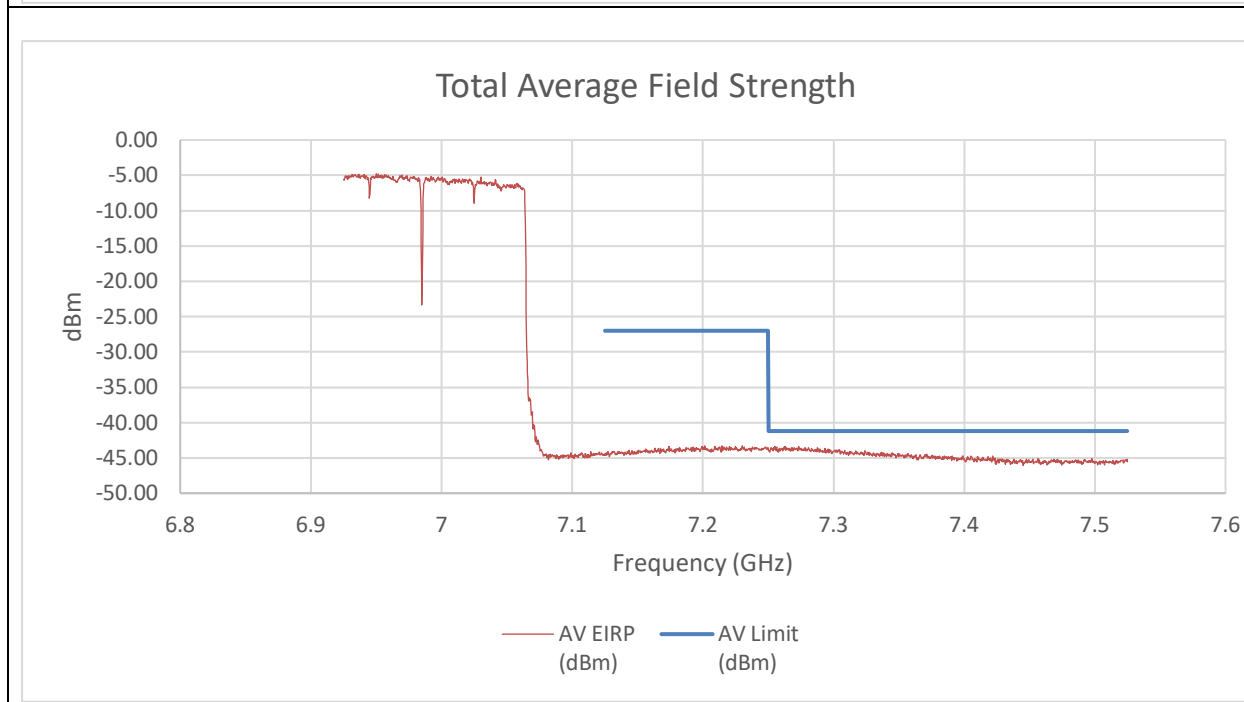
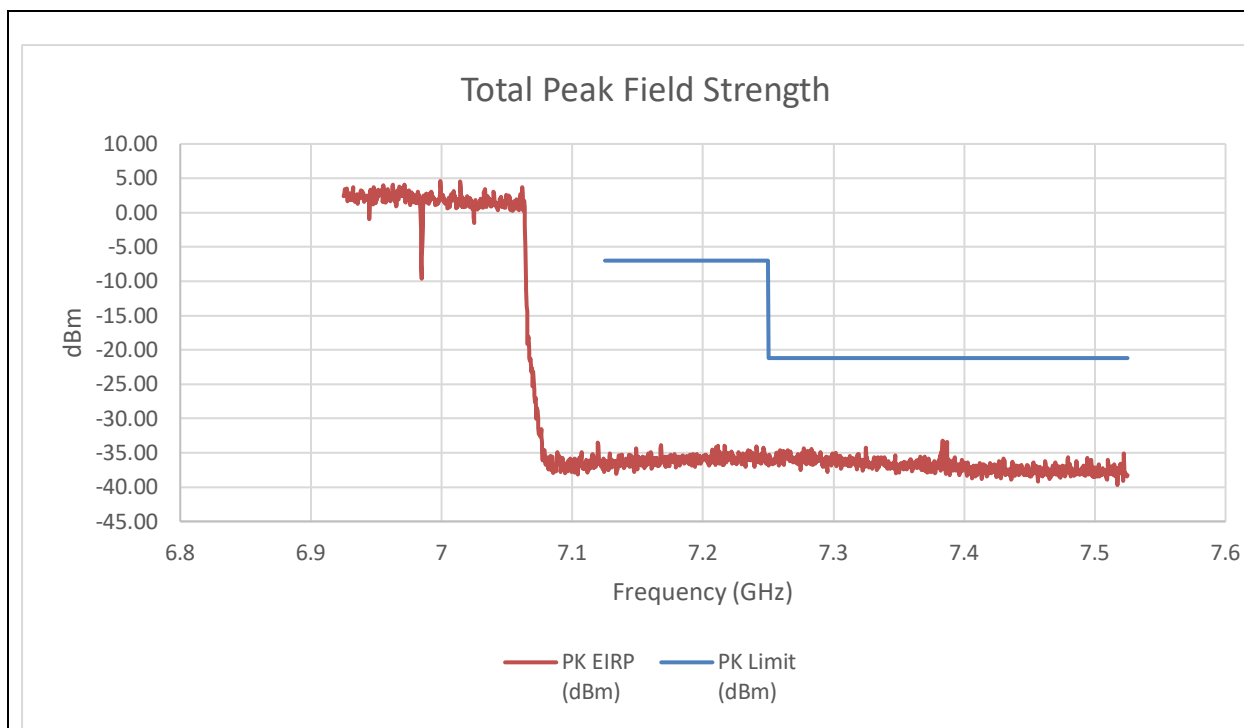


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-50.56	-48.77	-36.25	-7.00	-29.25
7.25	-47.93	-49.33	-35.25	-21.20	-14.05
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-58.32	-57.96	-44.63	-27.00	-17.63
7.25	-57.67	-57.32	-43.99	-41.20	-2.79

An array gain of 10.31 dBi and a duty cycle correction factor of 0.19 dBm was used in the final calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6905MHz) – 2x996T+484T+996T(NON-CONTIGUOUS)
LOW POWER INDOOR

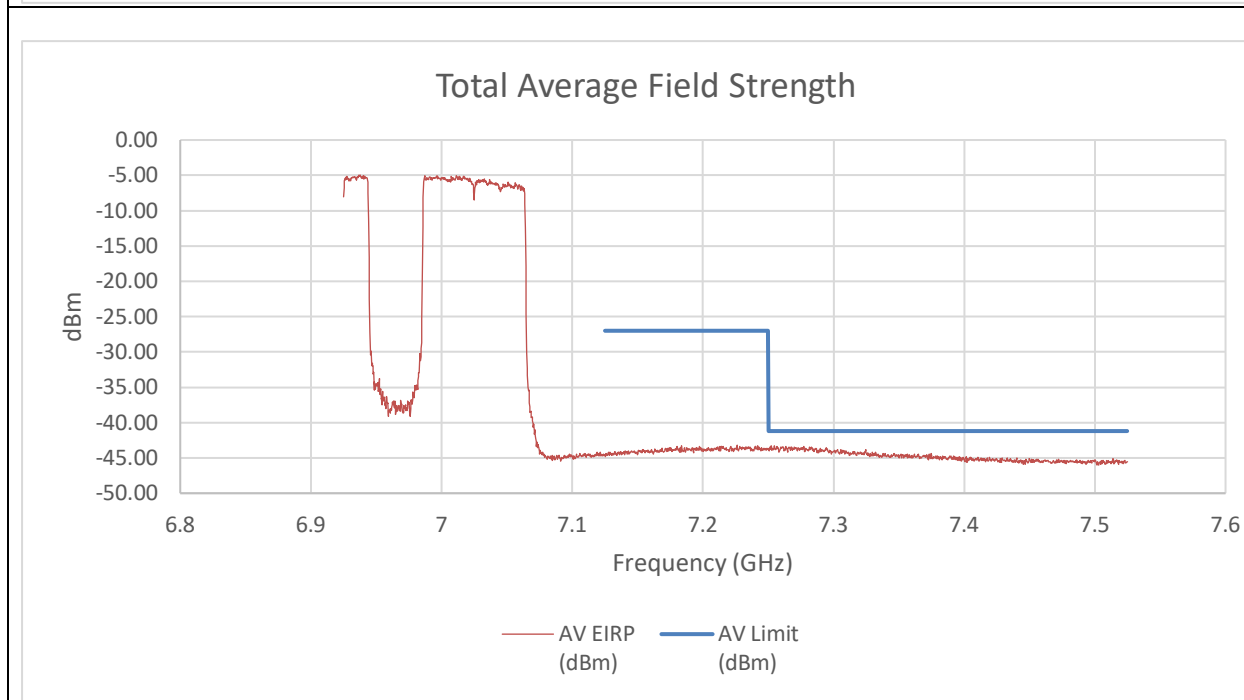
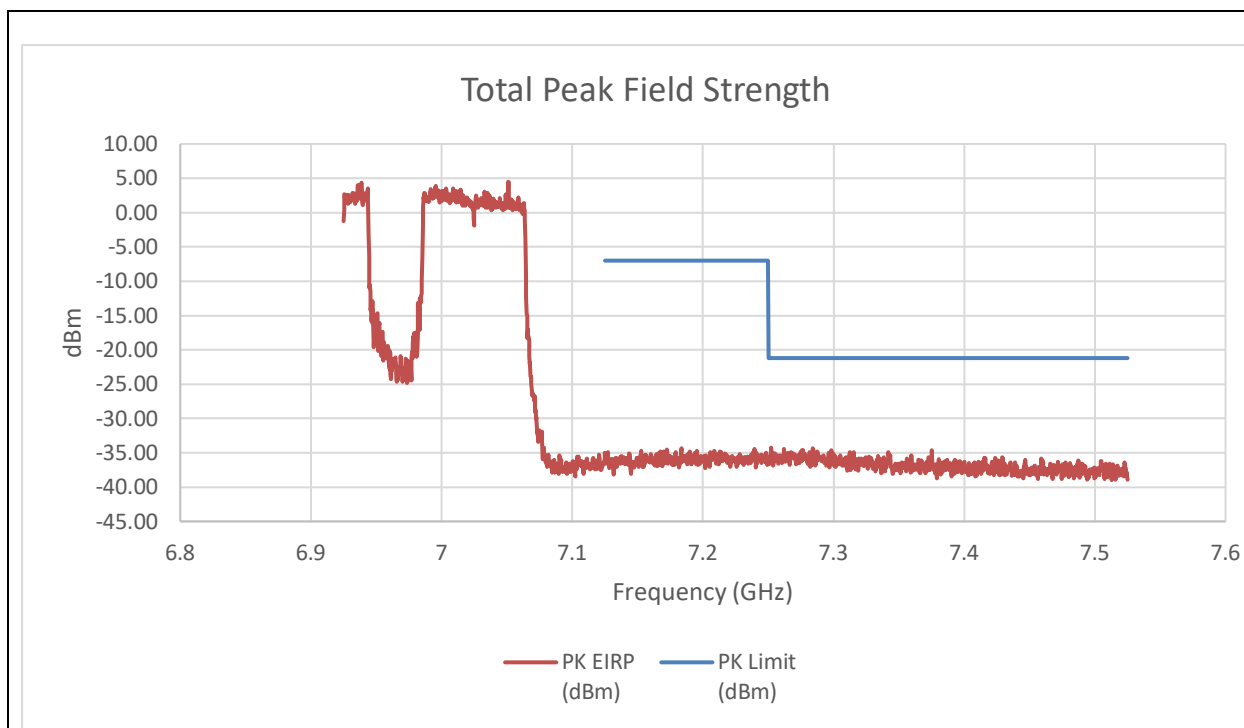


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-50.38	-49.44	-36.56	-7.00	-29.56
7.25	-49.52	-49.04	-35.95	-21.20	-14.75
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-57.99	-57.89	-44.43	-27.00	-17.43
7.25	-57.45	-57.51	-43.97	-41.20	-2.77

An array gain of 10.31 dBi and a duty cycle correction factor of 0.19 dBm was used in the final calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6905MHz) – 2x996T+484T+996T(NON-CONTIGUOUS)
2) LOW POWER INDOOR

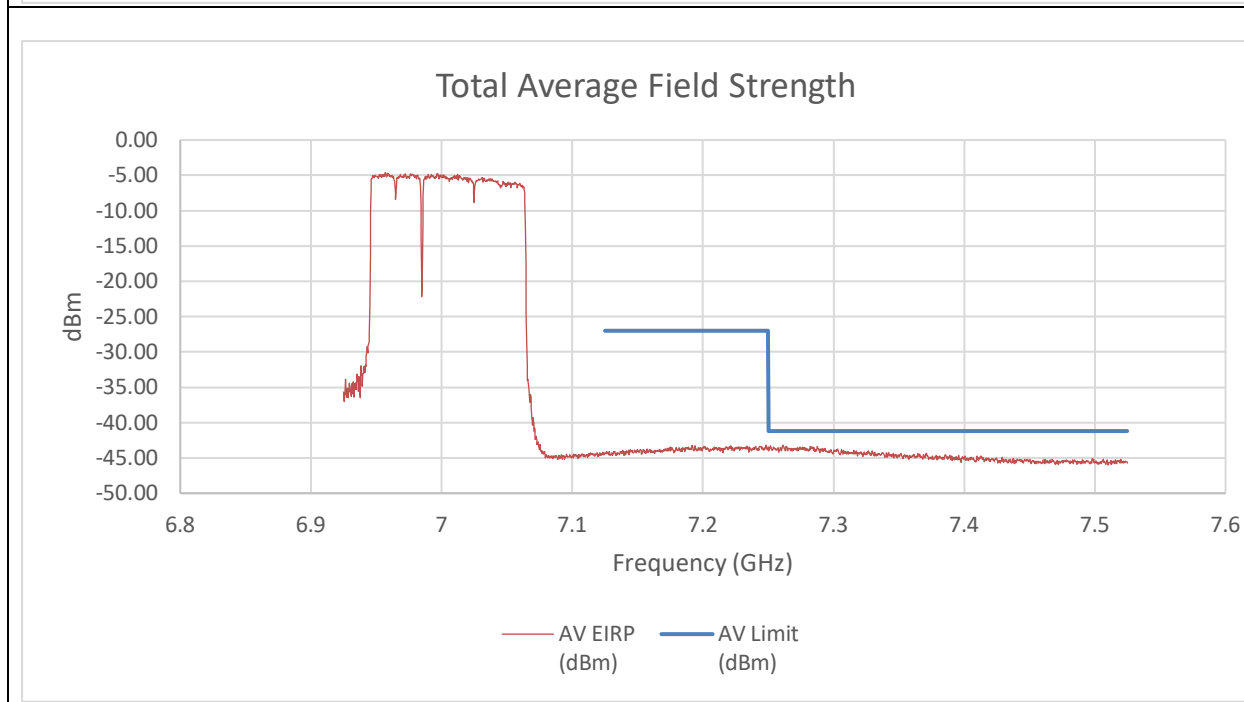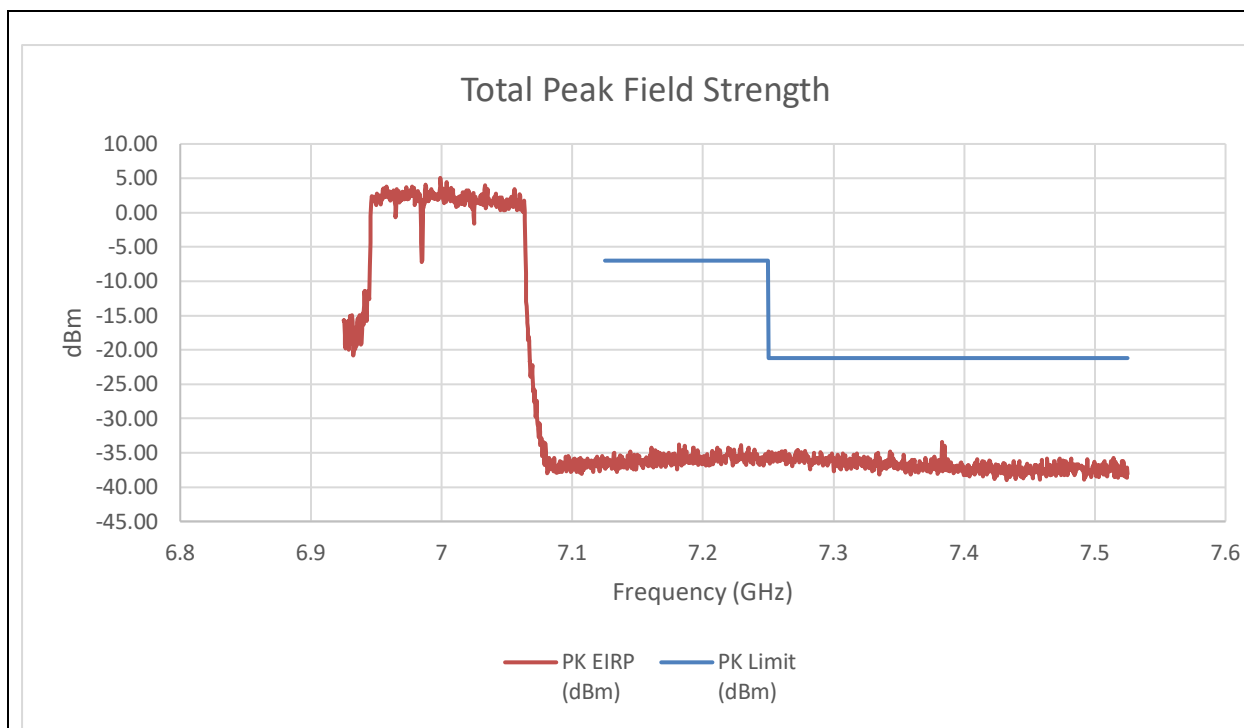


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-49.75	-51.40	-37.18	-7.00	-30.18
7.25	-49.15	-49.30	-35.90	-21.20	-14.70
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-70.17	-70.24	-56.88	-27.00	-29.88
7.25	-70.05	-70.39	-56.90	-41.20	-15.70

An array gain of 10.31 dBi and a duty cycle correction factor of 0.19 dBm was used in the final calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6905MHz) – 4x996T LOW POWER INDOOR

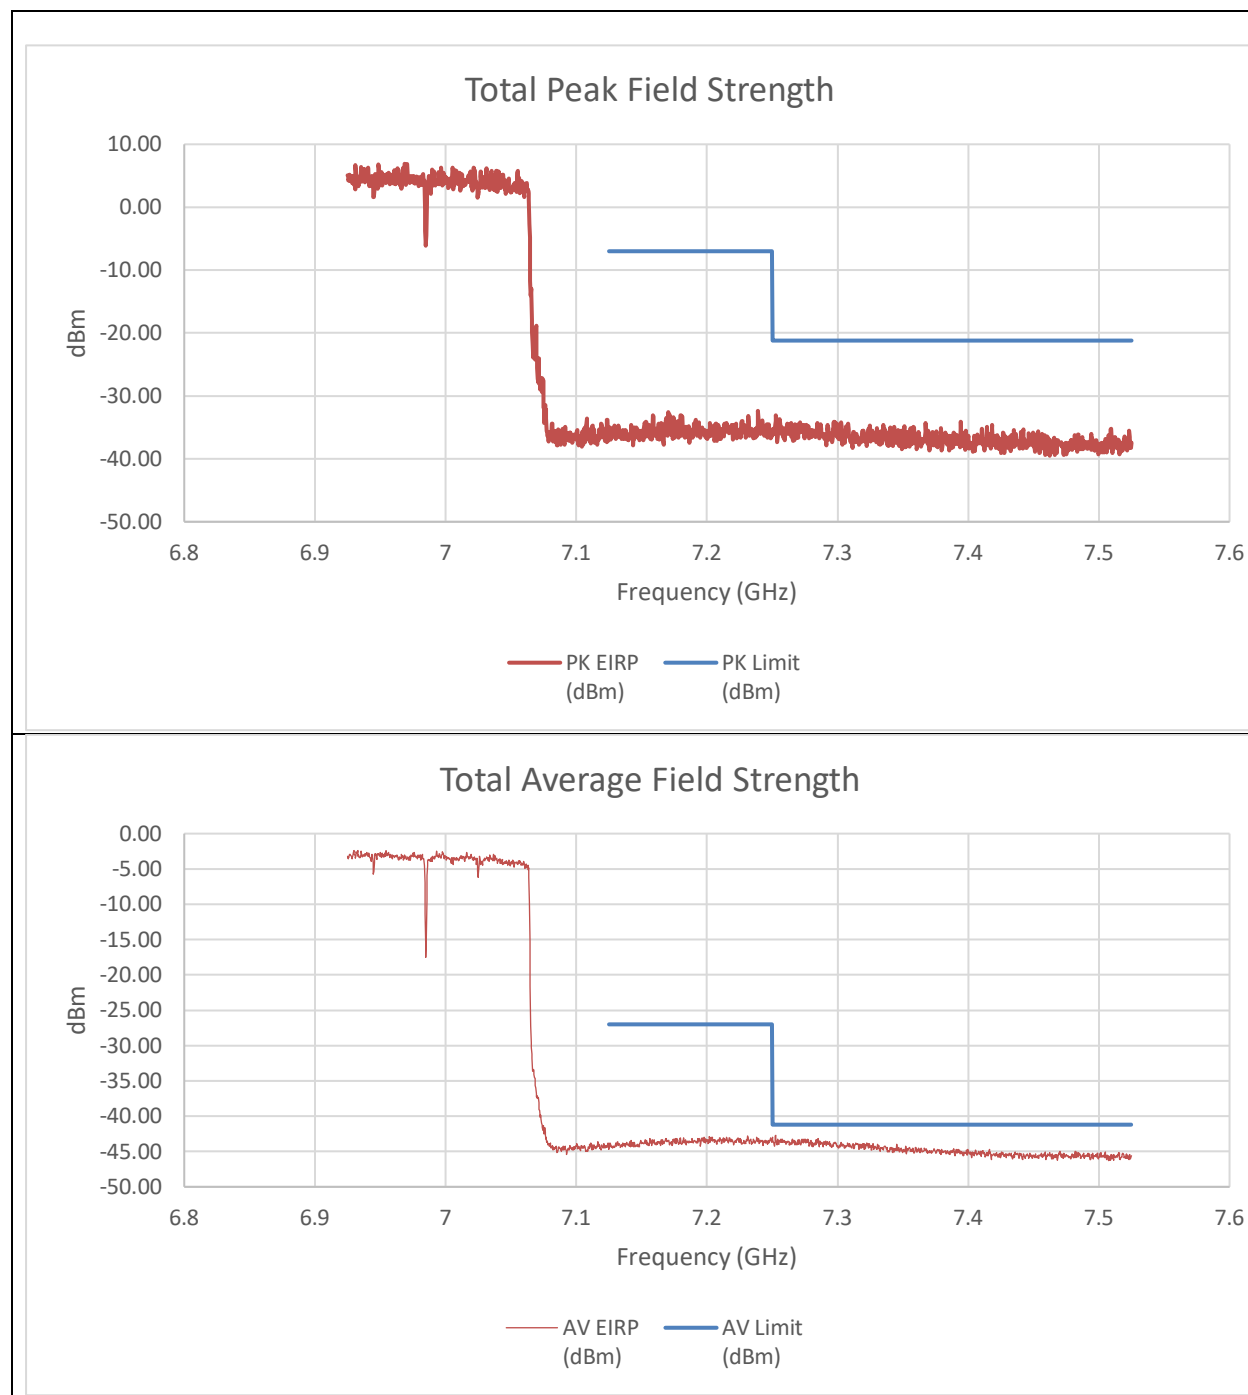


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-48.38	-48.38	-35.06	-7.00	-28.06
7.25	-48.57	-48.57	-35.25	-21.20	-14.05
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-57.23	-57.23	-43.87	-27.00	-16.87
7.25	-56.98	-56.98	-43.62	-41.20	-2.42

An array gain of 10.31 dBi was used in the final calculation of the summed data.

9.6.31. 802.11a MODE 2TX IN THE UNII-8 BAND (HIGH GAIN)

HIGH CHANNEL RESTRICTED BAND EDGE (7115MHz)

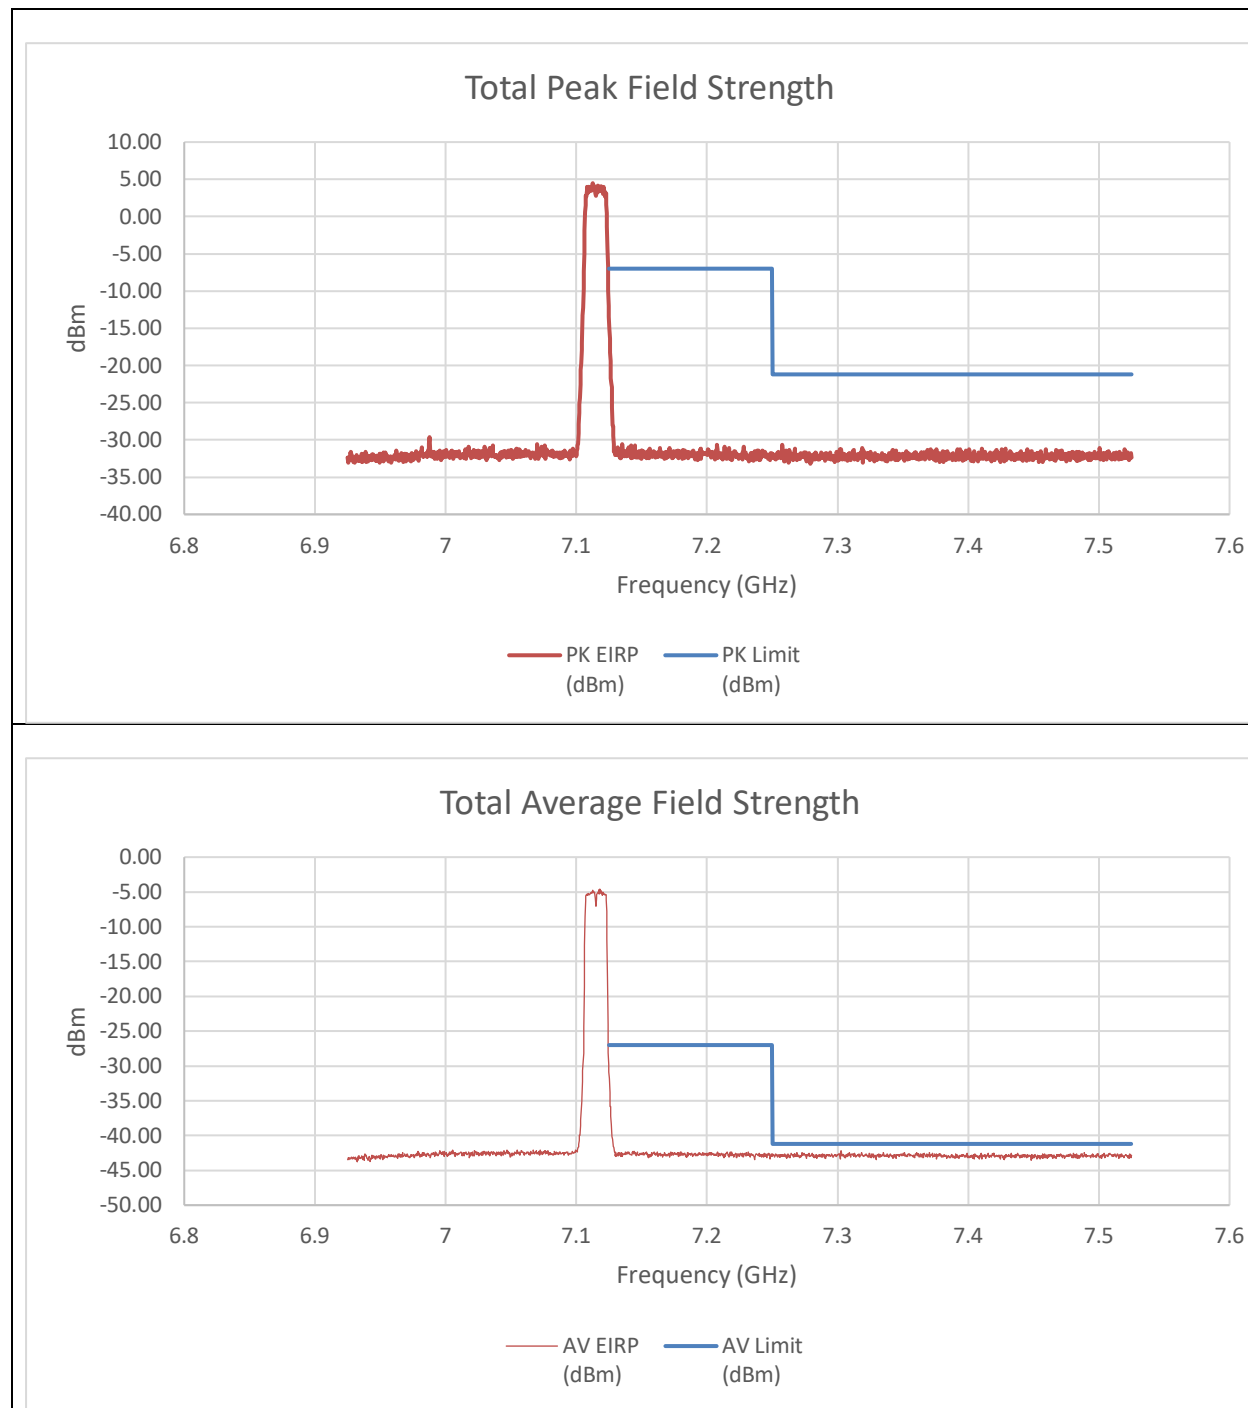


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.1251	-27.6	-27.8	-13.48	-7	-6.48
7.25	-45.72	-46.60	-31.92	-21.20	-10.72
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.1251	-45.37	-44.81	-30.86	-27	-3.86
7.25	-57.19	-56.90	-42.82	-41.20	-1.62


An array gain of 11.21 dBi was used in the calculation of the summed data.

9.6.32. 802.11be EHT20 MODE 2TX IN THE UNII-8 BAND (HIGH GAIN)


HIGH CHANNEL RESTRICTED BAND EDGE (7115MHz) – 26T STANDARD POWER

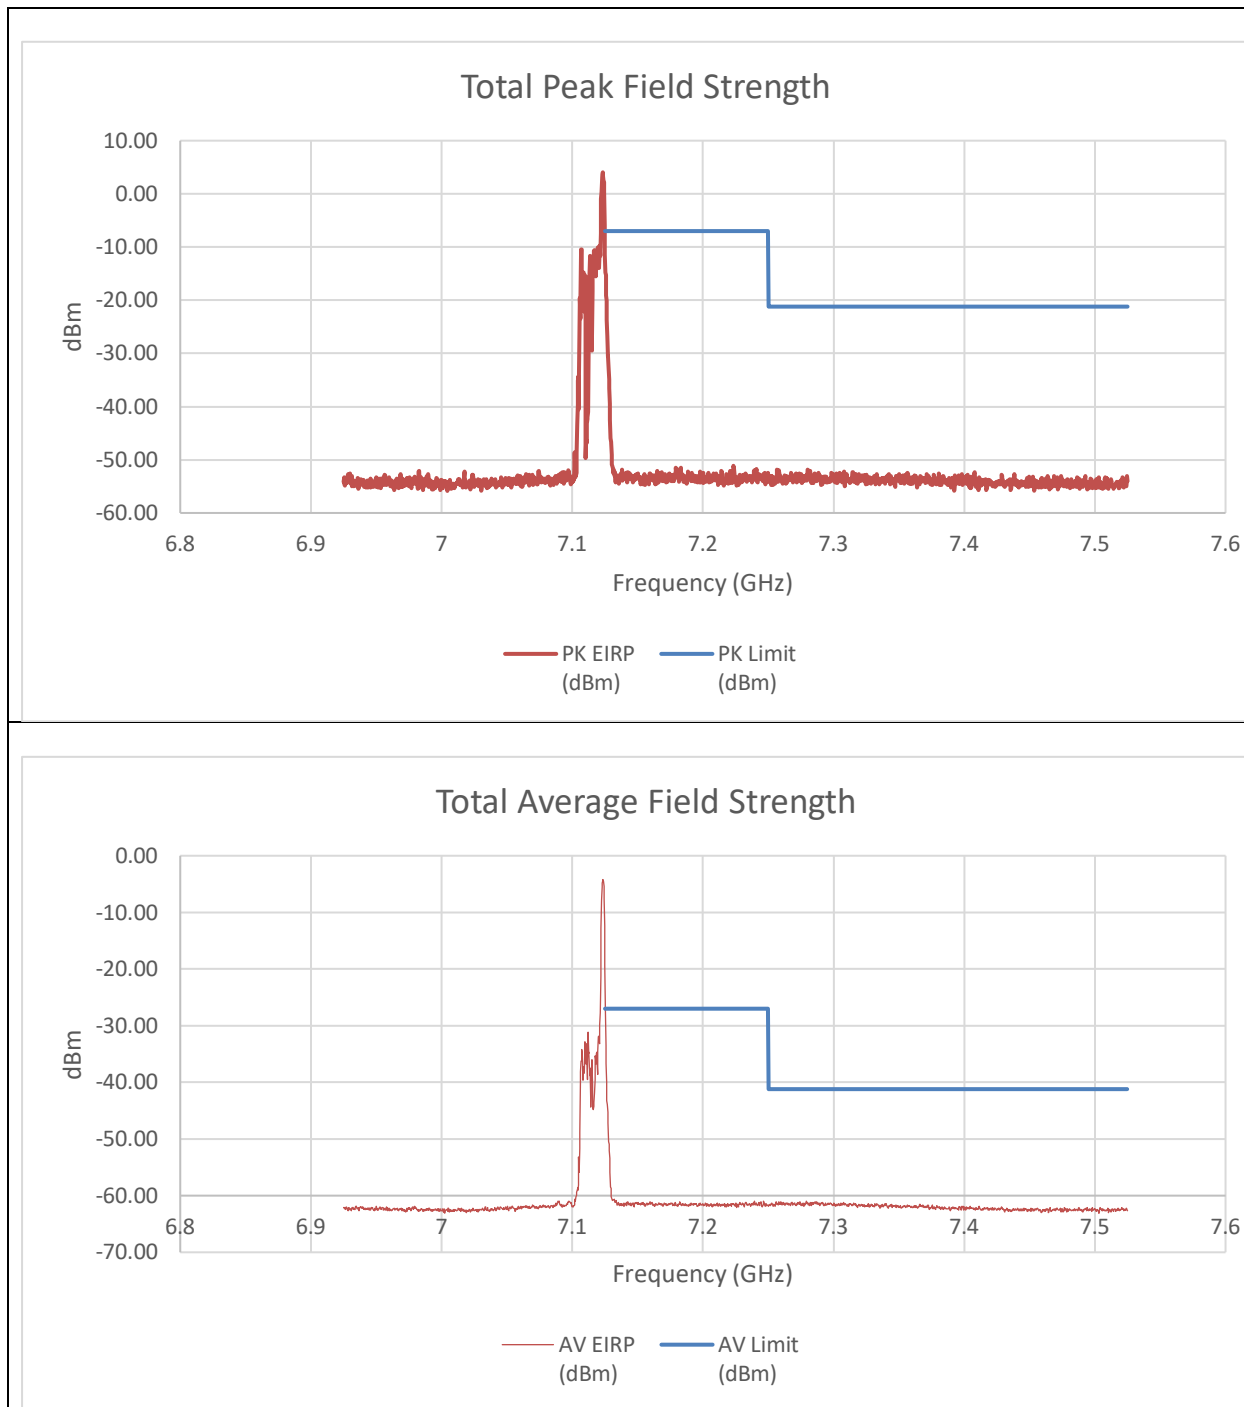

Integration C0

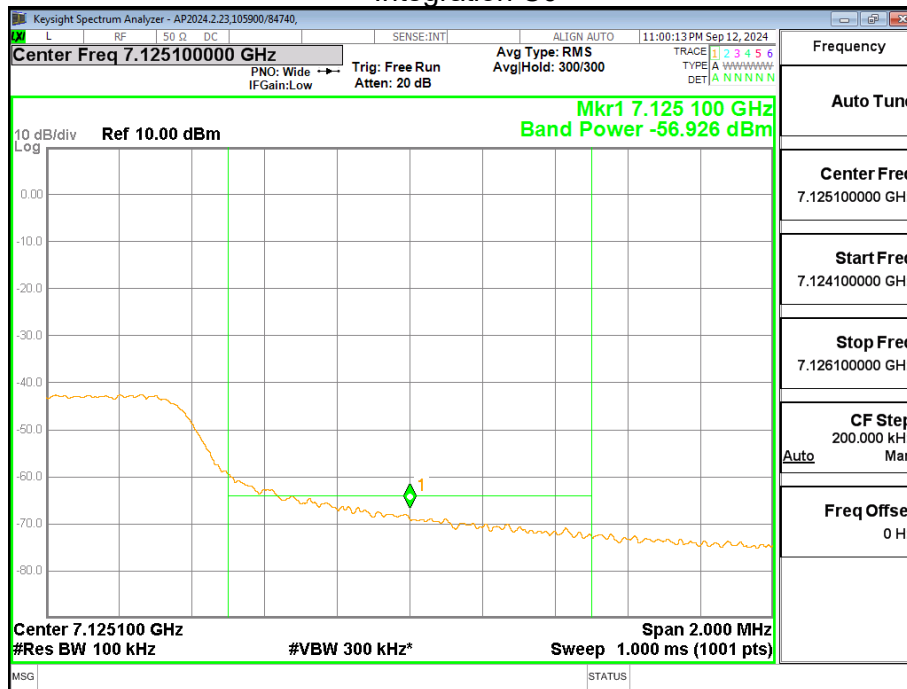

Integration C1

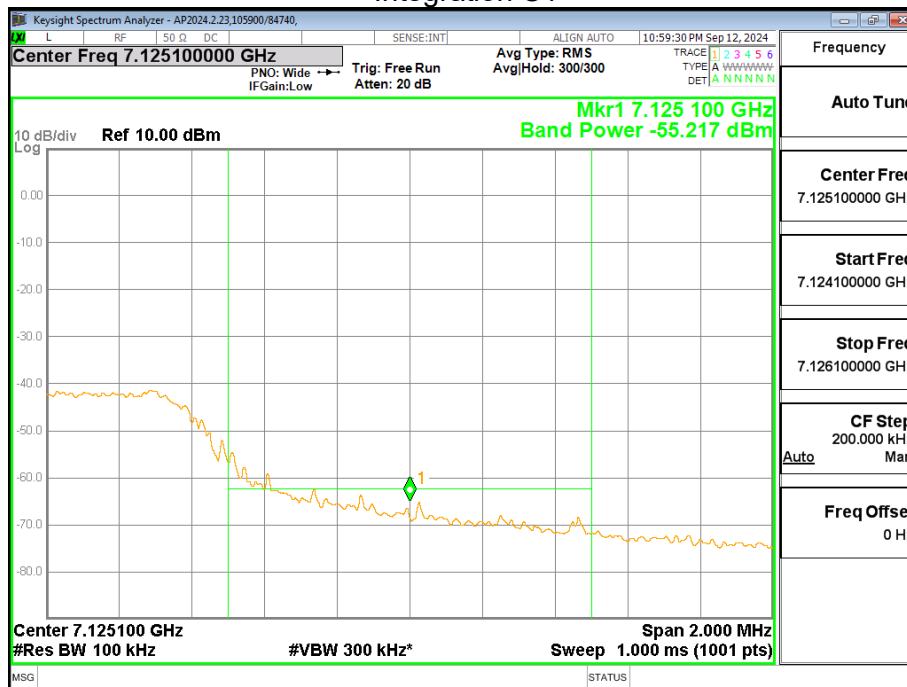


Summed Pk and Av Data


Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.1251	-25.71	-25.57	-11.42	-7	-4.42
7.25	-68.65	-67.29	-53.70	-21.20	-32.50
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.125	-56.93	-55.22	-28.47	-27	-1.47
7.25	-75.63	-76.08	-61.63	-41.20	-20.43

An array gain of 11.21 dBi was used in the calculation of the summed data. Also for integration measurement a value of 13.3 dB was added to account for attenuator and cable loss offset.


HIGH CHANNEL RESTRICTED BAND EDGE (7115MHz) – 52T STANDARD POWER

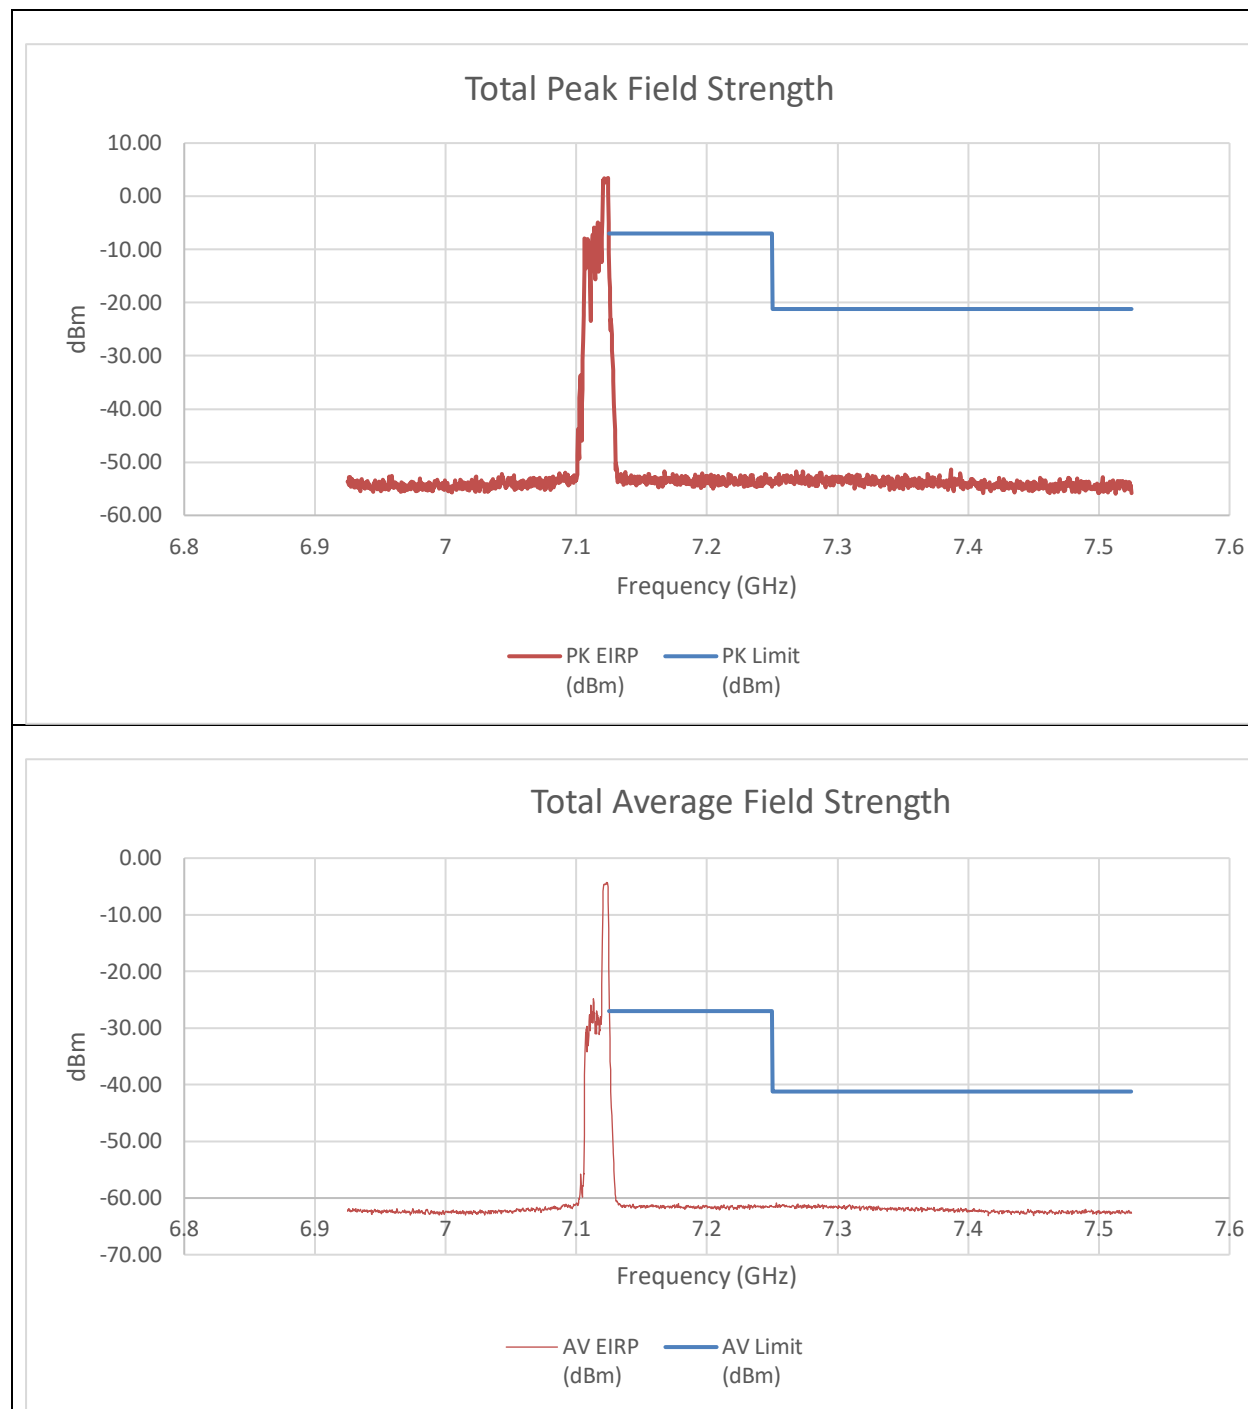

Integration C0

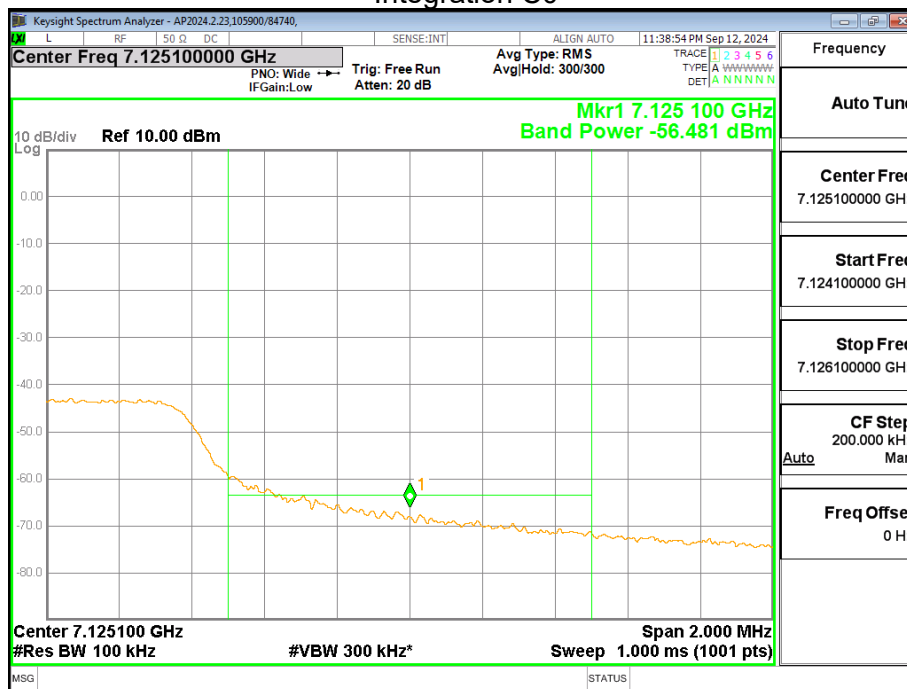

Integration C1

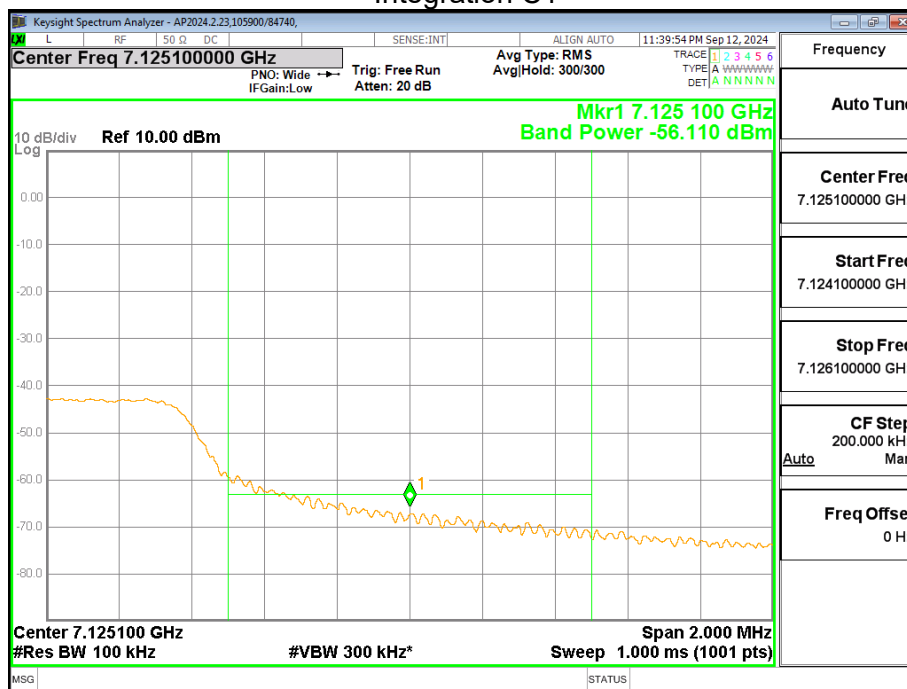


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.1251	-25.02	-24.54	-10.55	-7	-3.55
7.25	-68.04	-67.50	-53.54	-21.20	-32.34
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.125	-56.48	-56.11	-28.77	-27	-1.77
7.25	-75.65	-75.80	-61.50	-41.20	-20.30

An array gain of 11.21 dBi was used in the calculation of the summed data. Also for integration measurement a value of 13.3 dB was added to account for attenuator and cable loss offset.

HIGH CHANNEL RESTRICTED BAND EDGE (7115MHz) – 52T+26T STANDARD POWER

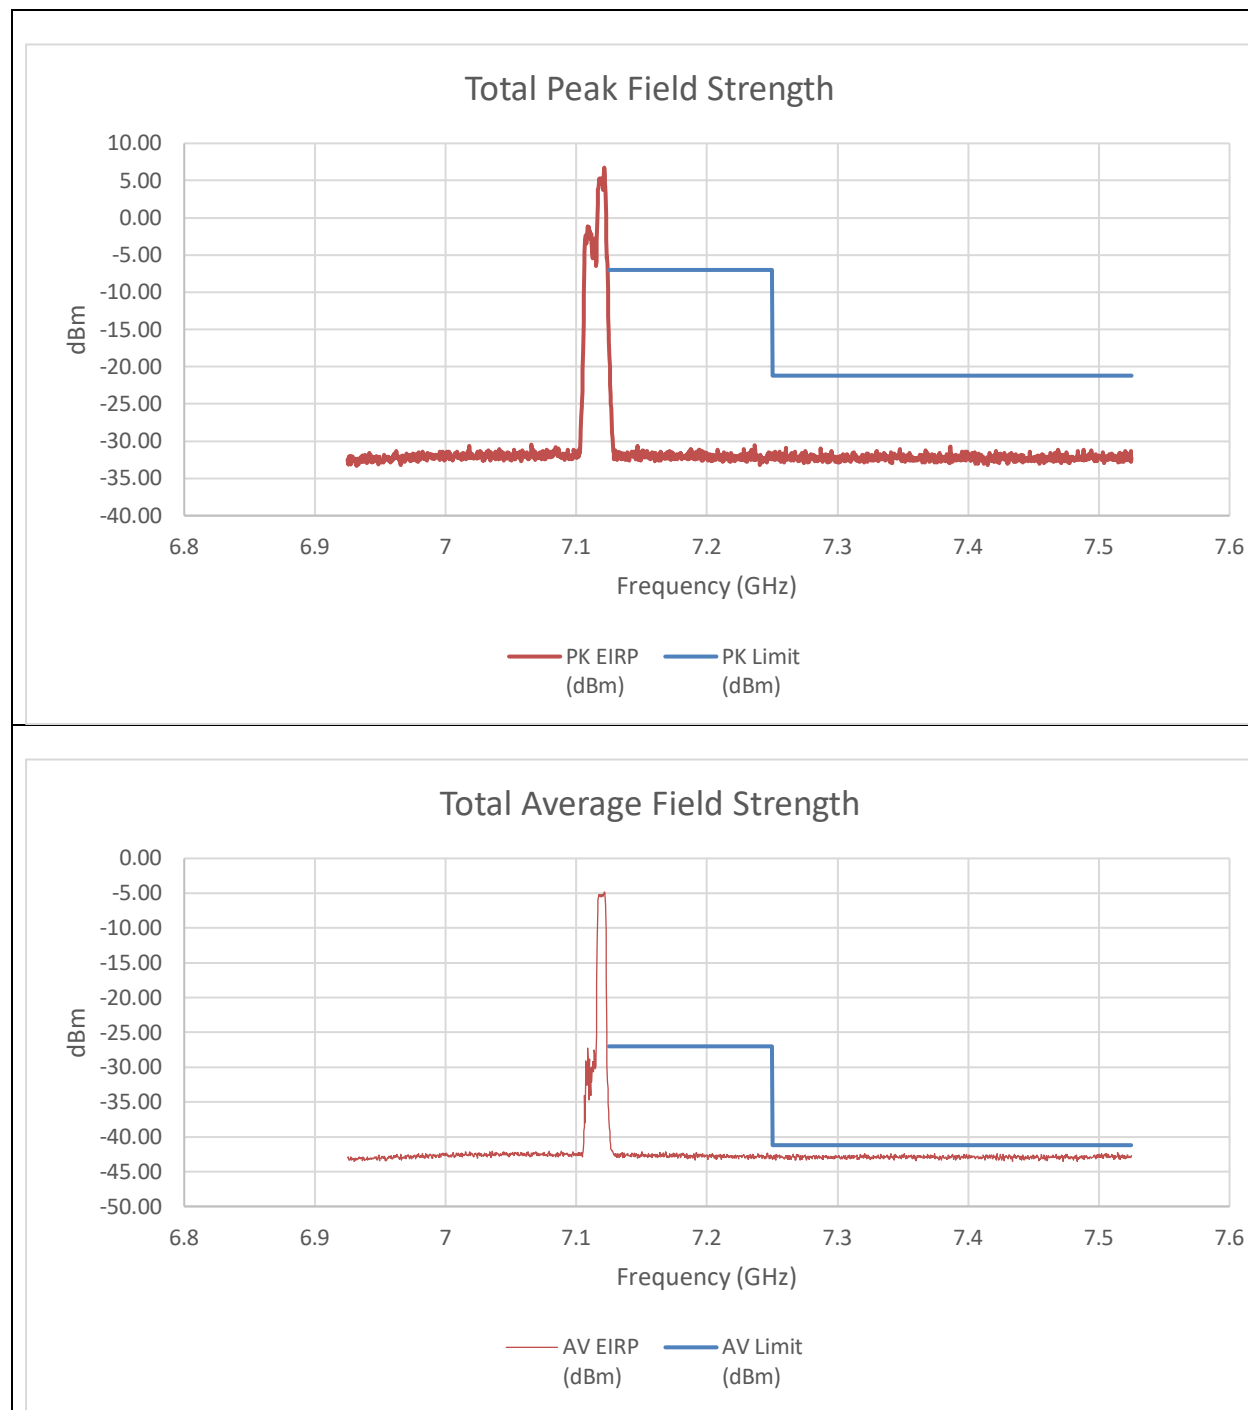


Summed Pk and Av Data


Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.1251	-30.3	-30.9	-16.37	-7	-9.37
7.25	-45.60	-46.00	-31.58	-21.20	-10.38
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-55.33	-54.41	-40.63	-27.00	-13.63
7.25	-57.12	-57.39	-43.03	-41.20	-1.83

An array gain of 11.21 dBi was used in the calculation of the summed data.


HIGH CHANNEL RESTRICTED BAND EDGE (7115MHz) – 106T STANDARD POWER

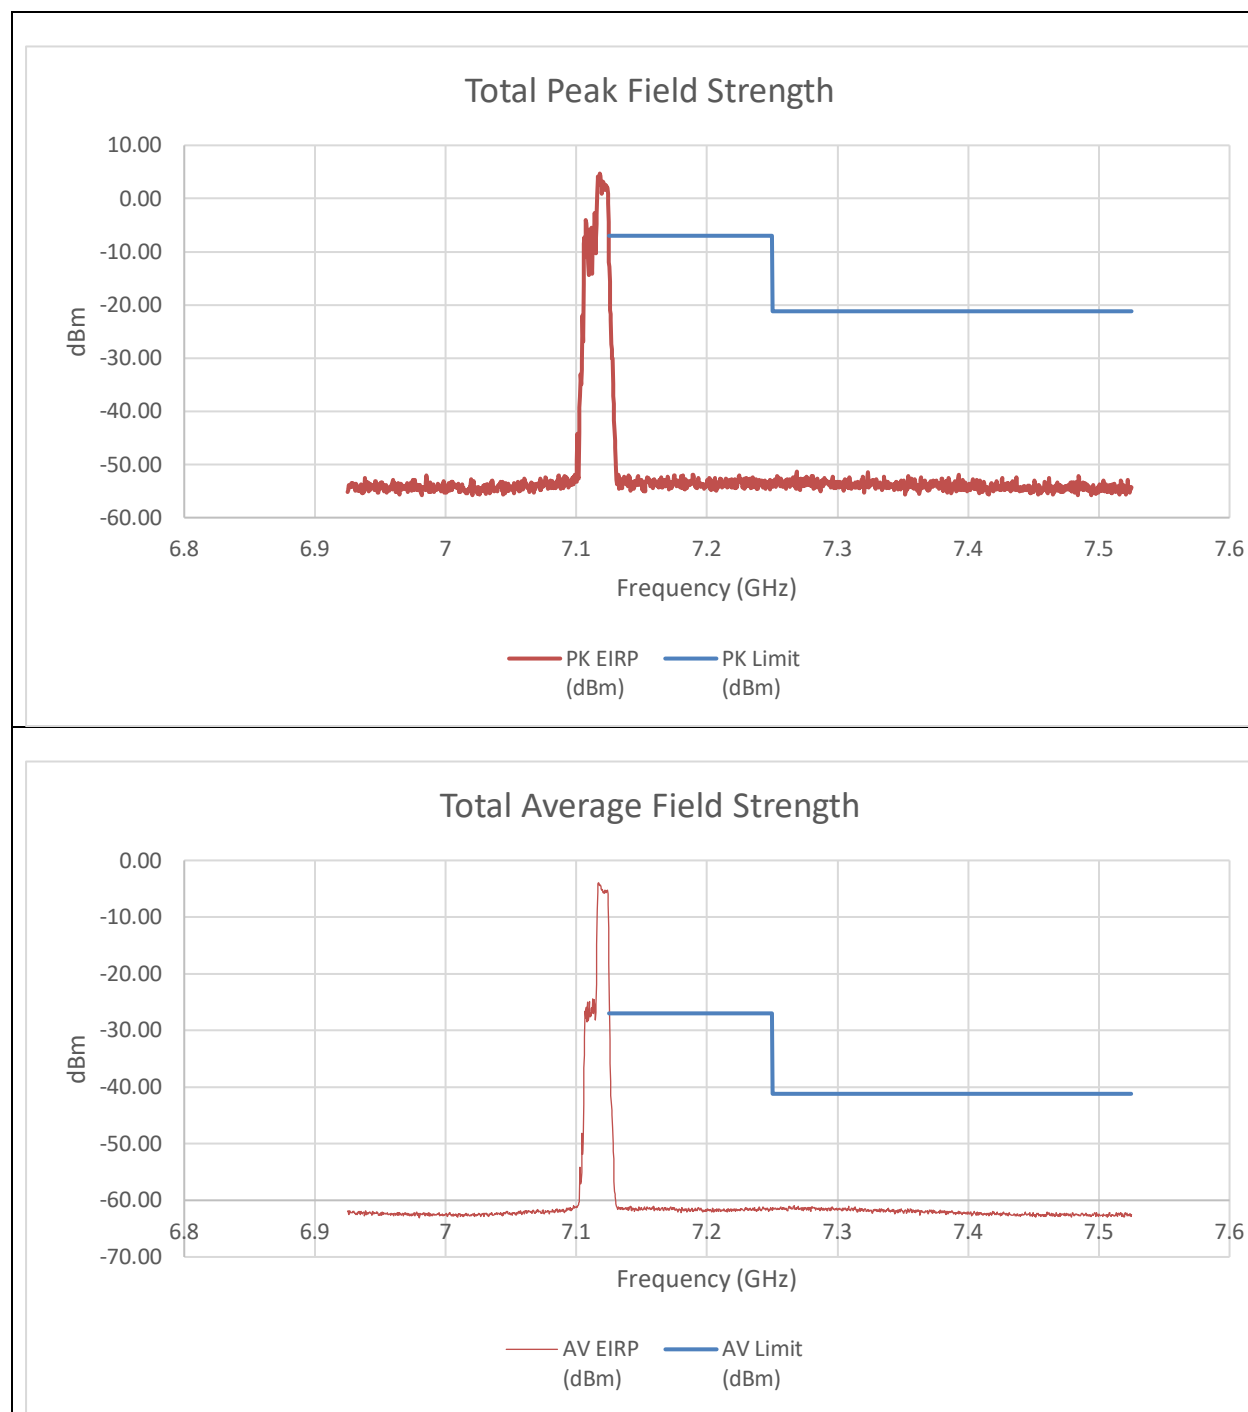

Integration C0

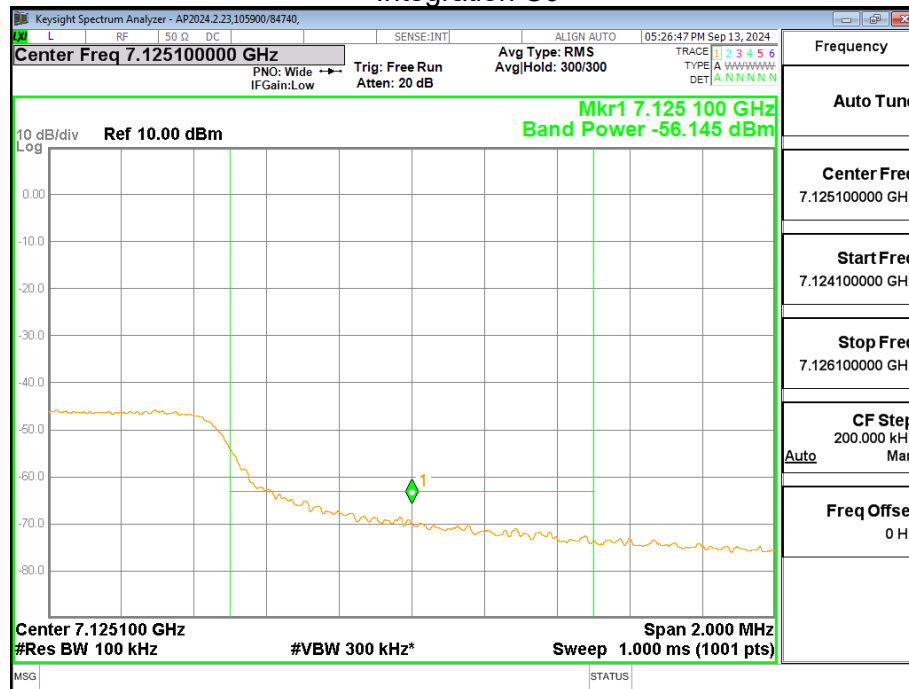

Integration C1

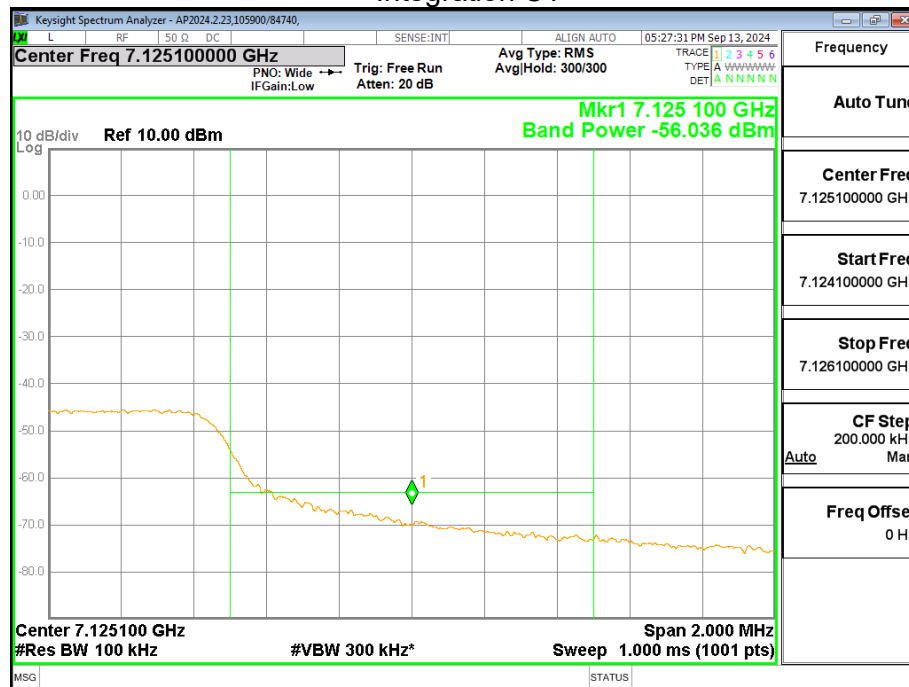


Summed Pk and Av Data


Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.1251	-25.98	-26.44	-11.98	-7	-4.98
7.25	-68.57	-67.65	-53.87	-21.20	-32.67
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.125	-56.15	-56.04	-28.57	-27	-1.57
7.25	-75.68	-75.76	-61.50	-41.20	-20.30

An array gain of 11.21 dBi was used in the calculation of the summed data. Also for integration measurement a value of 13.3 dB was added to account for attenuator and cable loss offset.


HIGH CHANNEL RESTRICTED BAND EDGE (7115MHz) – 106T+26T STANDARD POWER

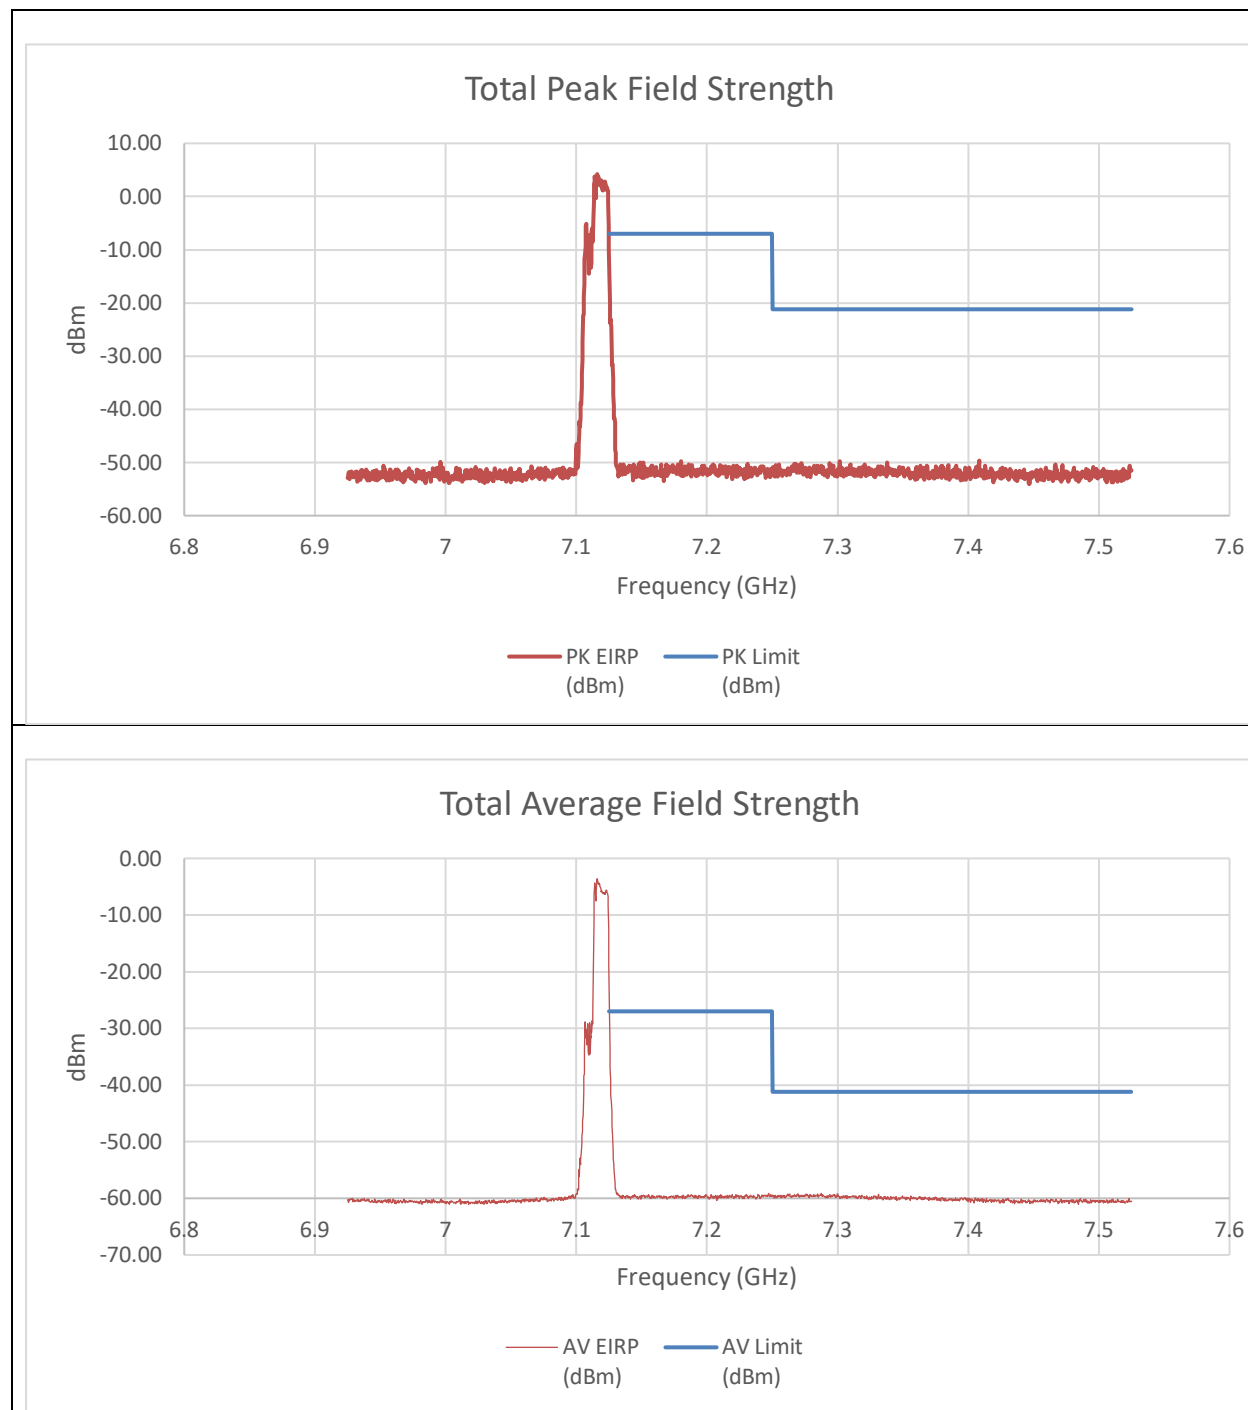

Integration C0

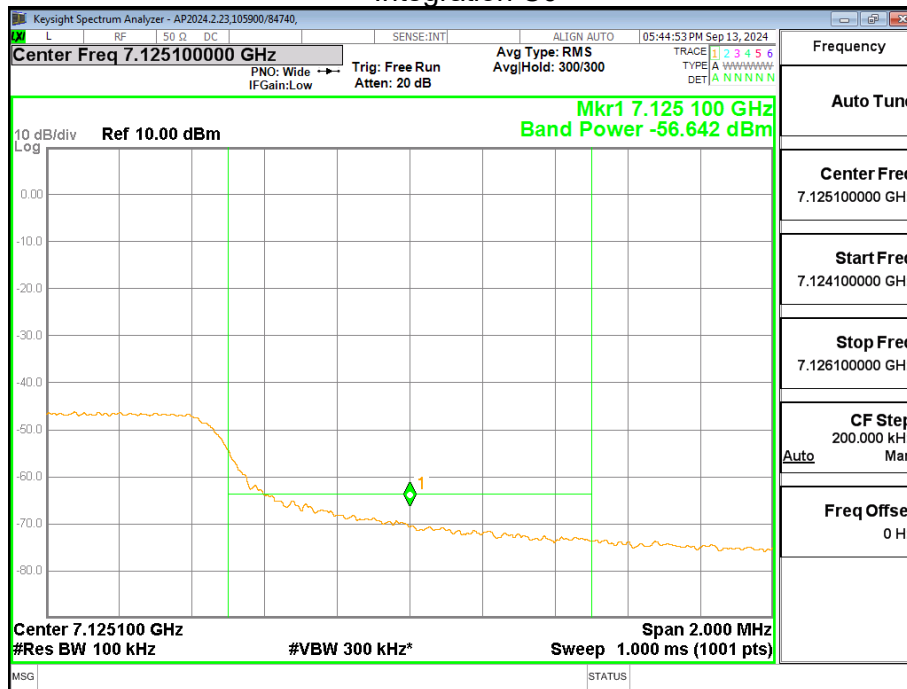

Integration C1

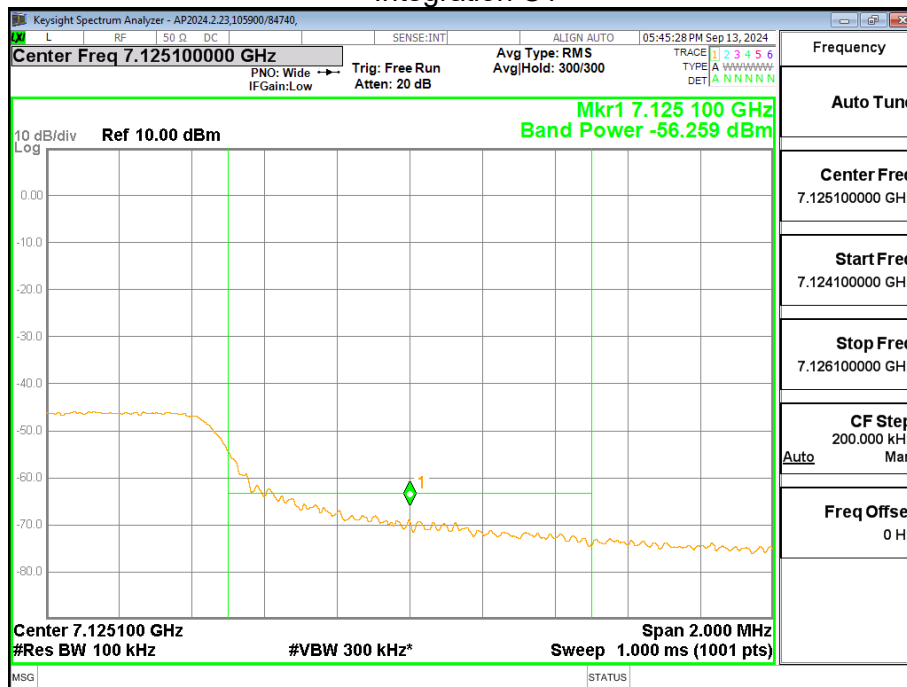


Summed Pk and Av Data


Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.1251	-21.88	-28.12	-9.74	-7	-2.74
7.25	-66.02	-64.22	-50.81	-21.20	-29.61
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.125	-56.64	-56.26	-28.93	-27	-1.93
7.25	-73.42	-73.88	-59.42	-41.20	-18.22

An array gain of 11.21 dBi was used in the calculation of the summed data. Also for integration measurement a value of 13.3 dB was added to account for attenuator and cable loss offset.


HIGH CHANNEL RESTRICTED BAND EDGE (7115MHz) – 242T STANDARD POWER

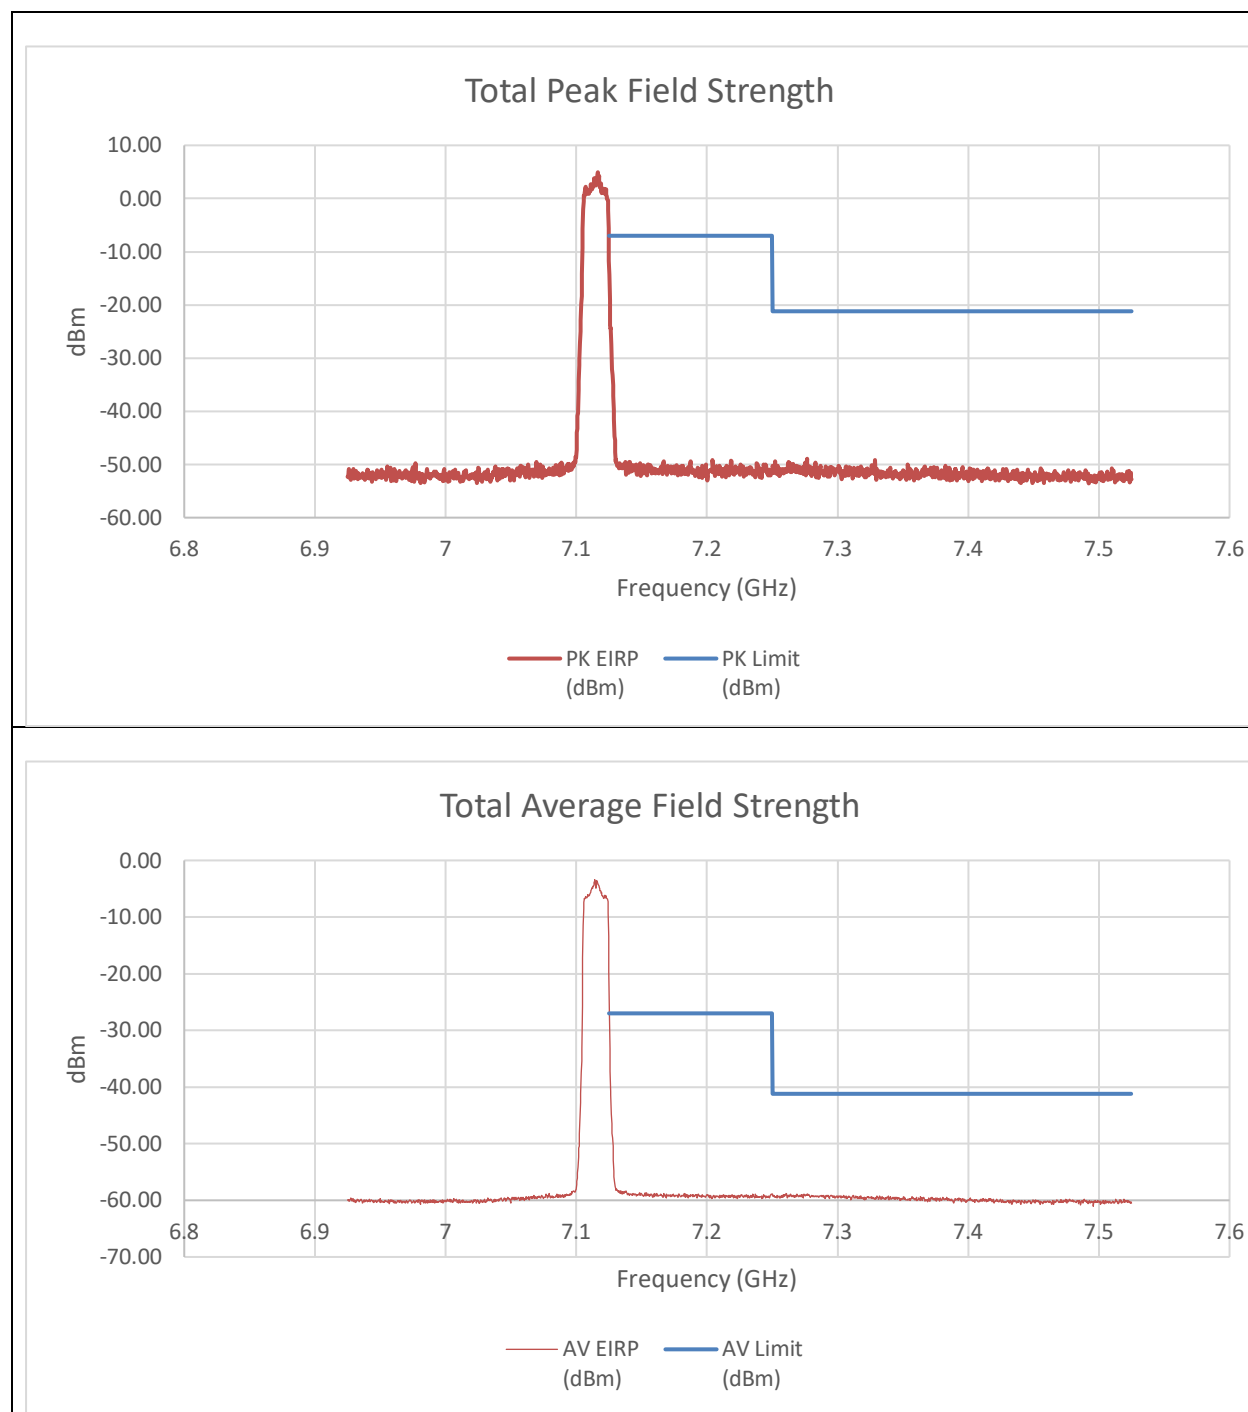

Integration C0

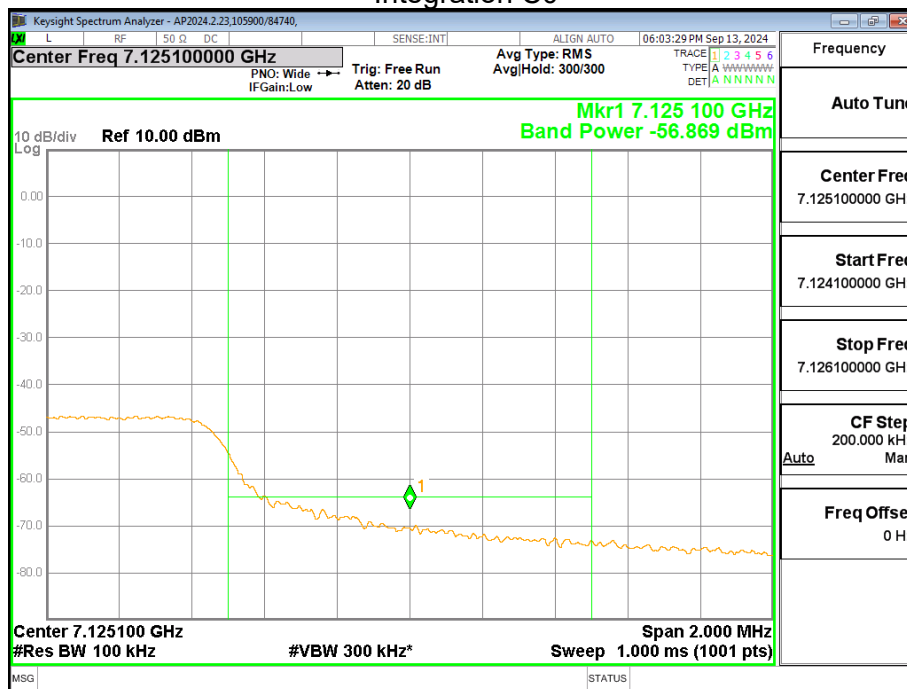

Integration C1

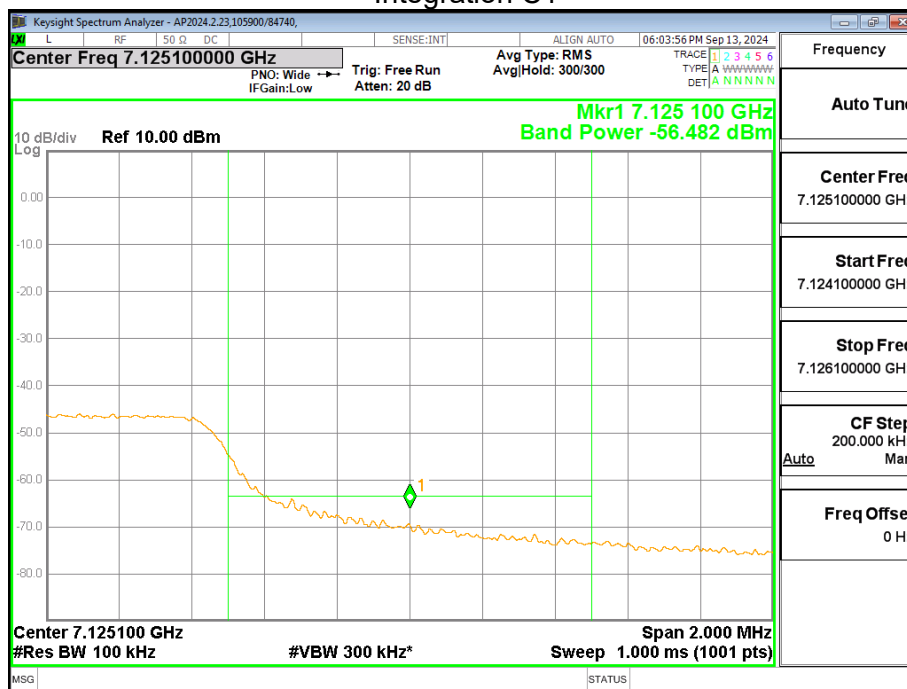


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.1251	-27.45	-24.84	-11.73	-7	-4.73
7.25	-66.02	-64.33	-50.87	-21.20	-29.67
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.125	-56.87	-56.48	-29.15	-27	-2.15
7.25	-73.86	-73.13	-59.26	-41.20	-18.06

An array gain of 11.21 dBi was used in the calculation of the summed data. Also for integration measurement a value of 13.3 dB was added to account for attenuator and cable loss offset.

9.6.33. 802.11be EHT40 MODE 2TX IN THE UNII-8 BAND (HIGH GAIN)

HIGH CHANNEL RESTRICTED BAND EDGE (7085MHz) – 484T STANDARD POWER

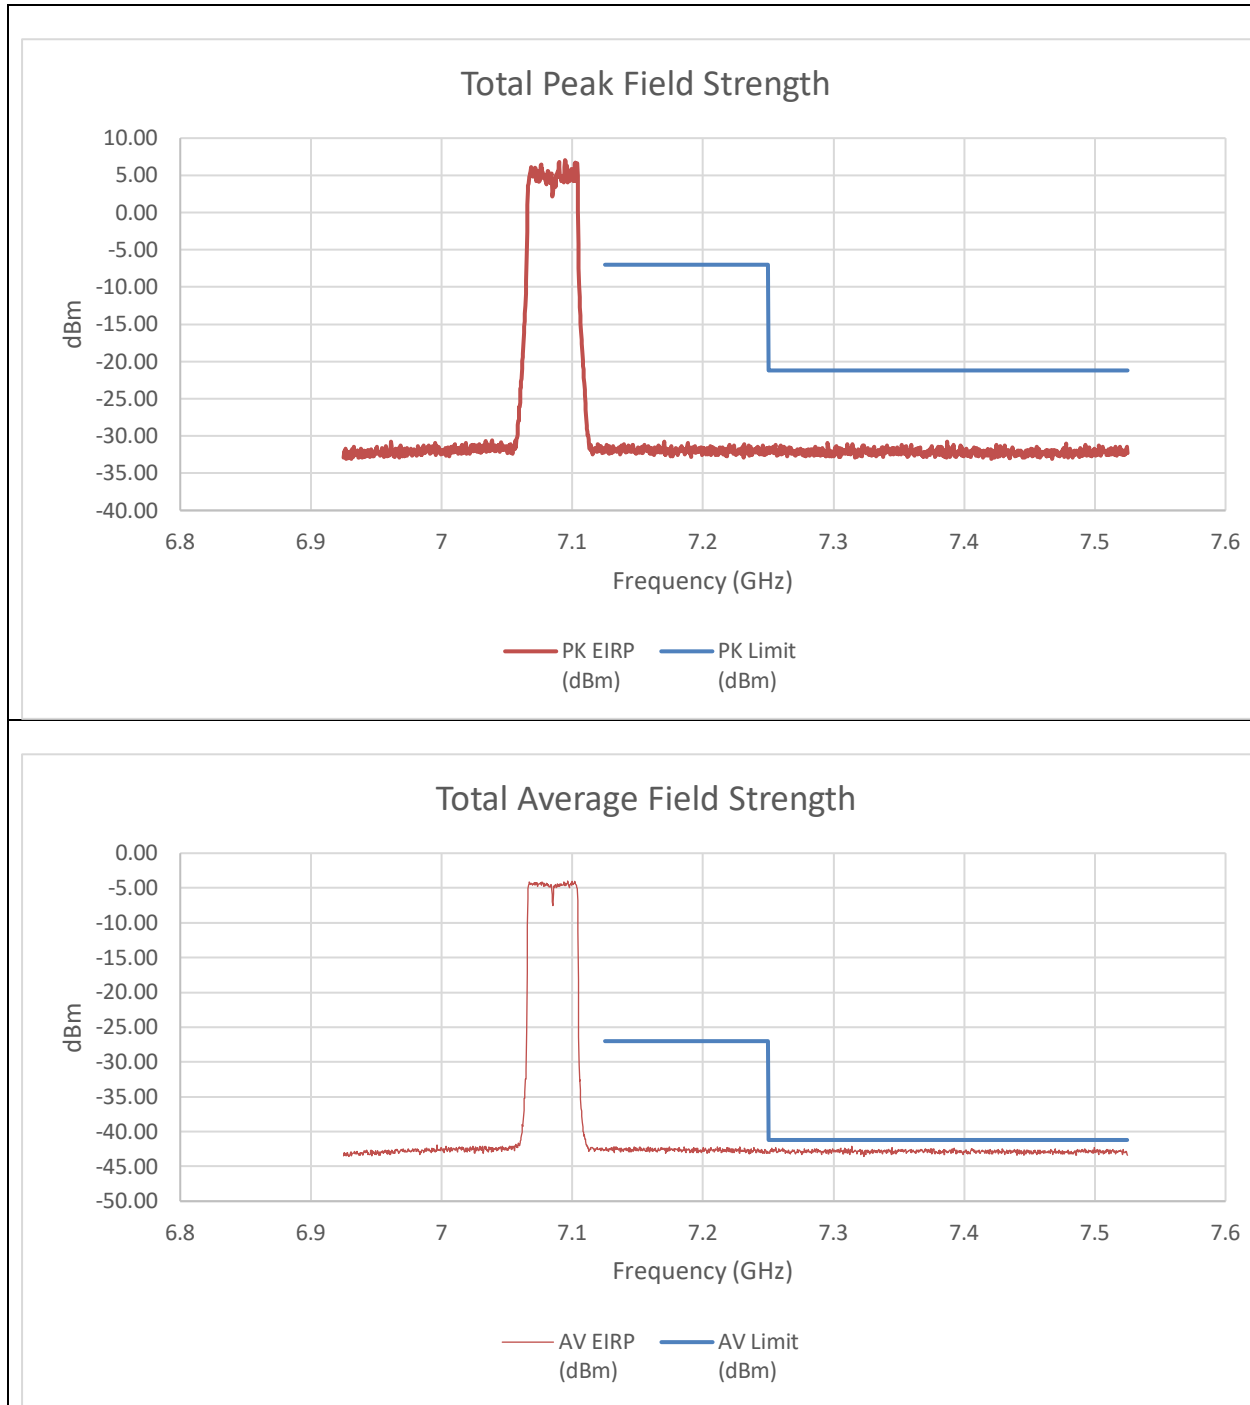


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-46.36	-45.96	-31.94	-7.00	-24.94
7.25	-45.07	-46.54	-31.52	-21.20	-10.32
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-56.39	-56.58	-42.26	-27.00	-15.26
7.25	-57.04	-57.39	-42.99	-41.20	-1.79

An array gain of 11.21 dBi was used in the calculation of the summed data.

9.6.34. 802.11be EHT80 MODE 2TX IN THE UNII-8 BAND (HIGH GAIN)

HIGH CHANNEL RESTRICTED BAND EDGE (7025MHz) – 484T+242T(CONTIGUOUS) STANDARD POWER

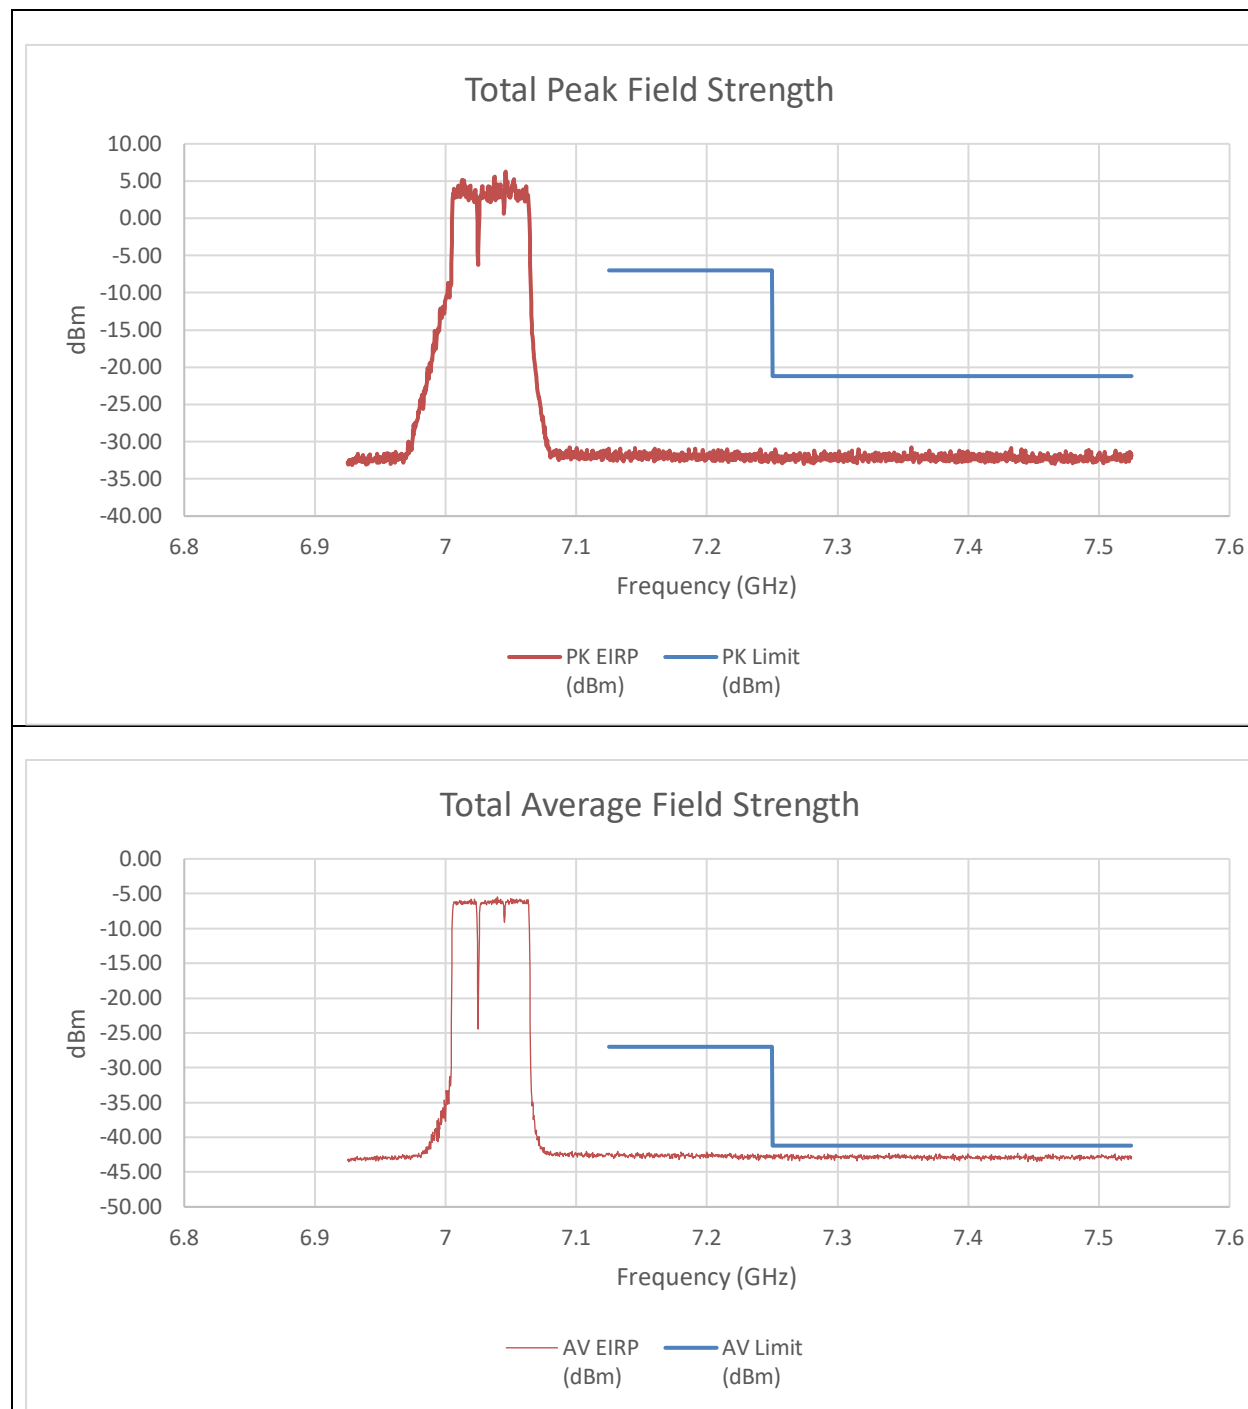


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-46.26	-47.13	-32.45	-7.00	-25.45
7.25	-46.37	-46.98	-32.44	-21.20	-11.24
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-56.79	-56.59	-42.47	-27.00	-15.47
7.25	-57.07	-56.90	-42.76	-41.20	-1.56

An array gain of 11.21 dBi was used in the calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (7025MHz) – 484T+242T(NON-CONTIGUOUS)
STANDARD POWER

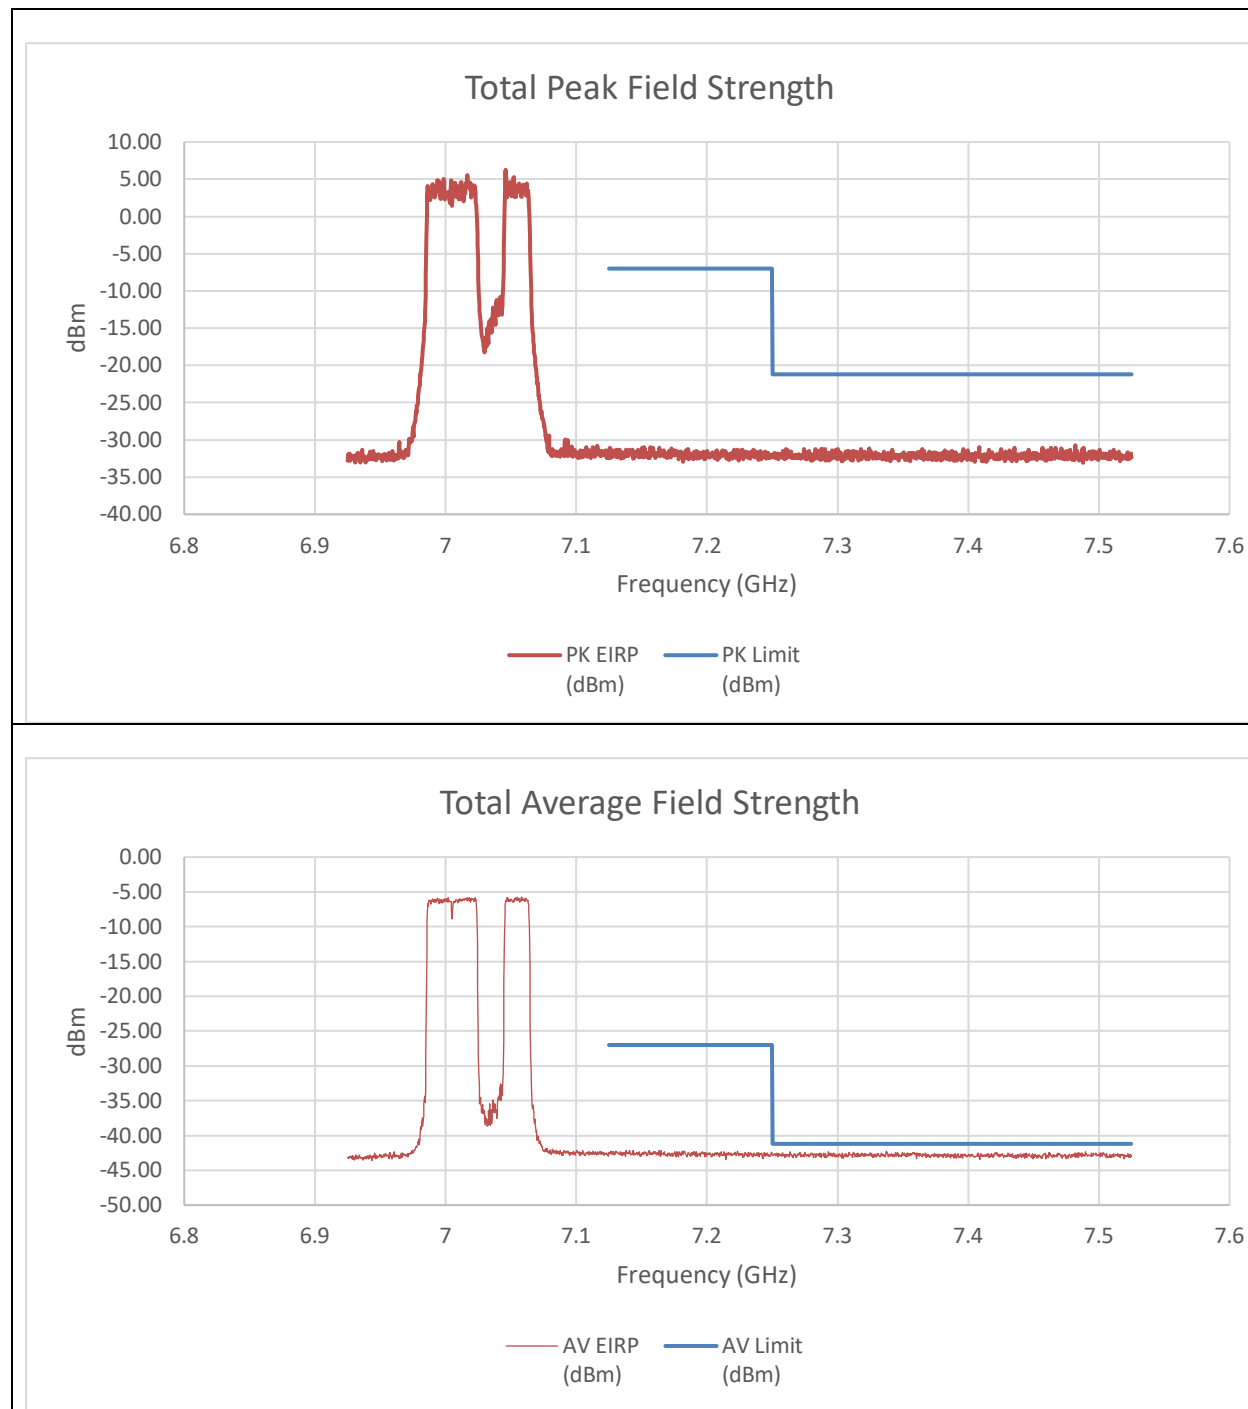


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-46.66	-46.74	-32.48	-7.00	-25.48
7.25	-46.20	-46.36	-32.06	-21.20	-10.86
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-56.96	-56.61	-42.56	-27.00	-15.56
7.25	-56.94	-56.86	-42.68	-41.20	-1.48

An array gain of 11.21 dBi was used in the calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (7025MHz) – 242T+484T(CONTIGUOUS) STANDARD POWER

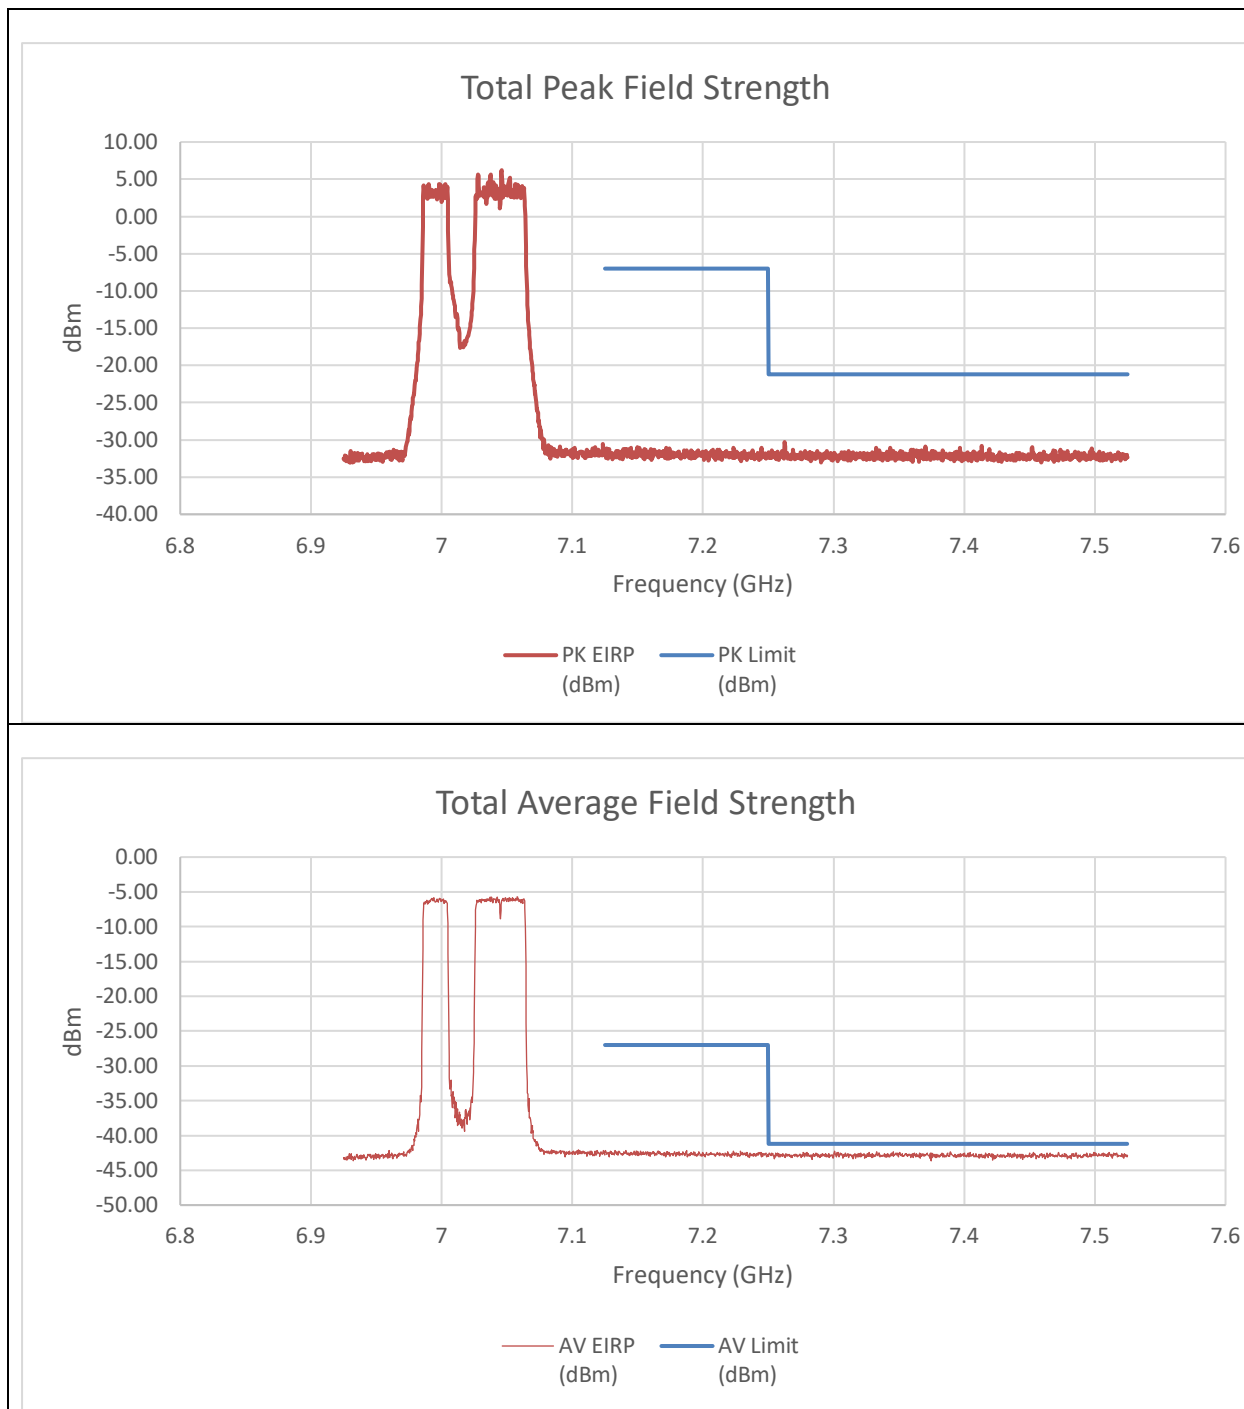


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-46.75	-46.50	-32.40	-7.00	-25.40
7.25	-47.52	-45.94	-32.44	-21.20	-11.24
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-56.43	-56.95	-42.46	-27.00	-15.46
7.25	-56.72	-56.86	-42.57	-41.20	-1.37

An array gain of 11.21 dBi was used in the calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (7025MHz) –996T STANDARD POWER

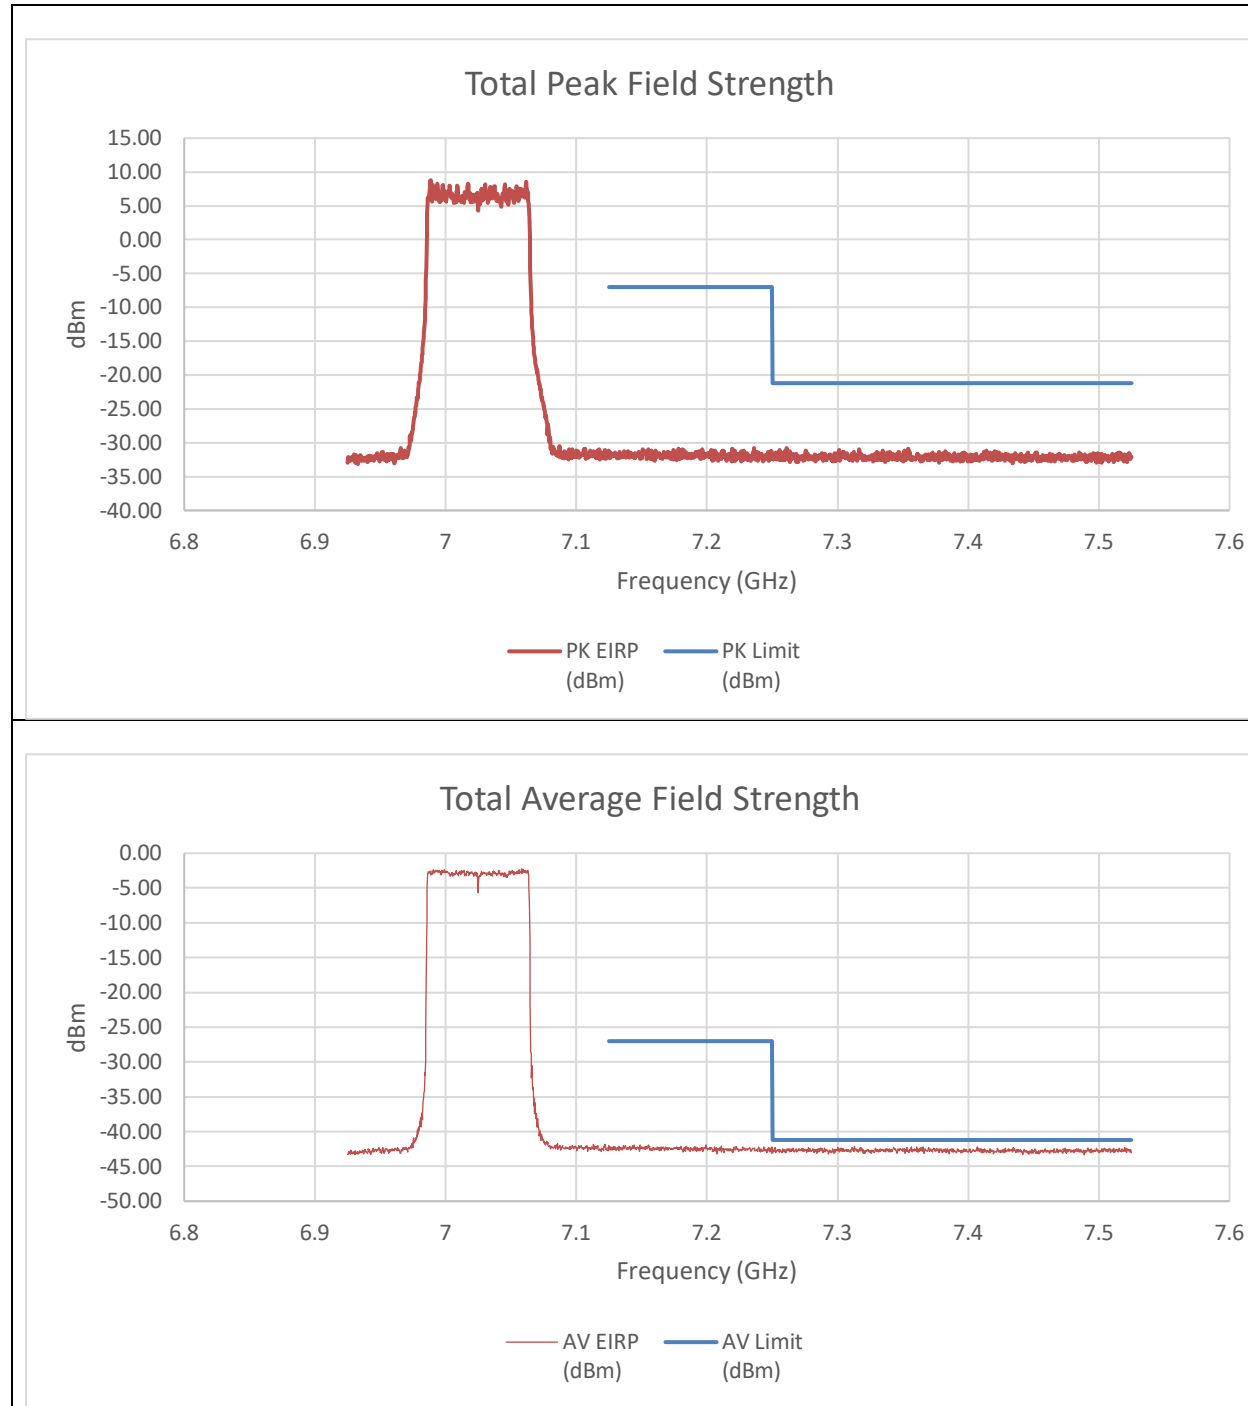


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-46.68	-46.38	-32.31	-7.00	-25.31
7.25	-46.85	-46.49	-32.45	-21.20	-11.25
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-57.22	-56.68	-42.63	-27.00	-15.63
7.25	-57.49	-56.97	-42.91	-41.20	-1.71

An array gain of 11.21 dBi and a duty cycle correction factor of 0.09 dBm was used in the calculation of the summed data.

9.6.35. 802.11be EHT160 MODE 2TX IN THE UNII-8 BAND (HIGH GAIN)

HIGH CHANNEL RESTRICTED BAND EDGE (6985MHz) – 996T+484T(CONTIGUOUS) STANDARD POWER

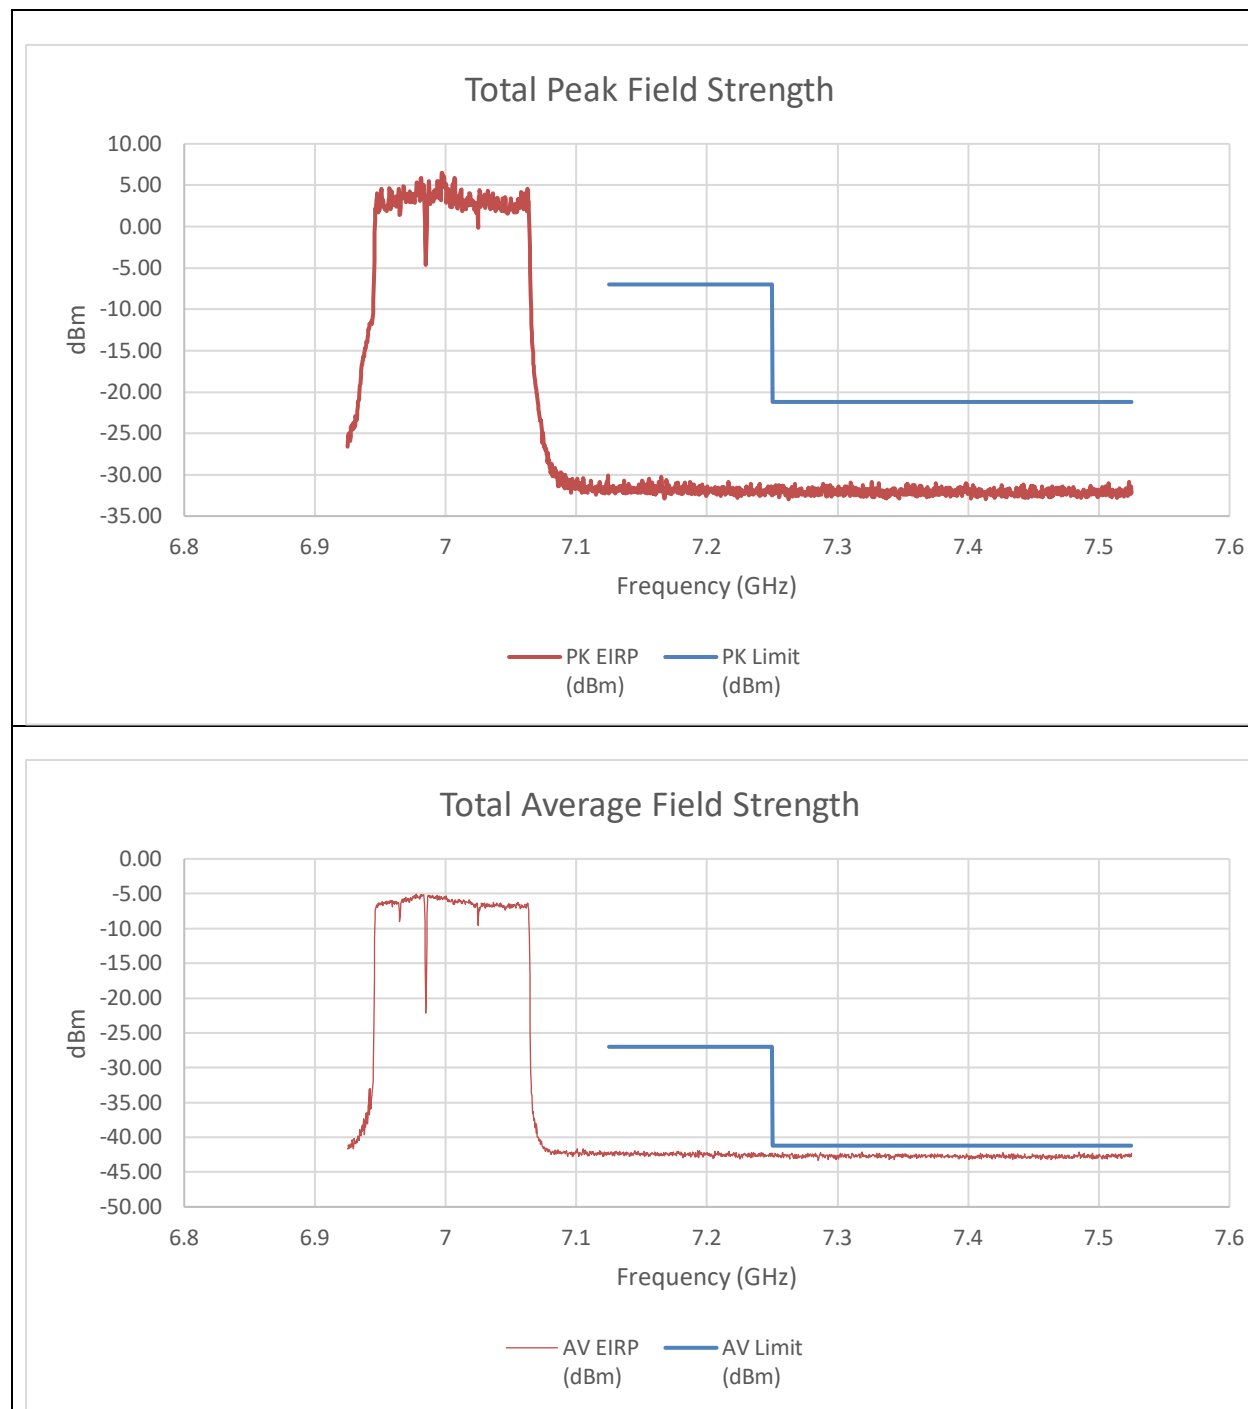


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-45.57	-46.20	-31.65	-7.00	-24.65
7.25	-45.49	-46.31	-31.66	-21.20	-10.46
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-56.65	-56.76	-42.40	-27.00	-15.40
7.25	-57.37	-56.63	-42.68	-41.20	-1.48

An array gain of 11.21 dBi and a duty cycle correction factor of 0.09 dBm was used in the calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6985MHz) – 996T+484T(NON-CONTIGUOUS)
STANDARD POWER

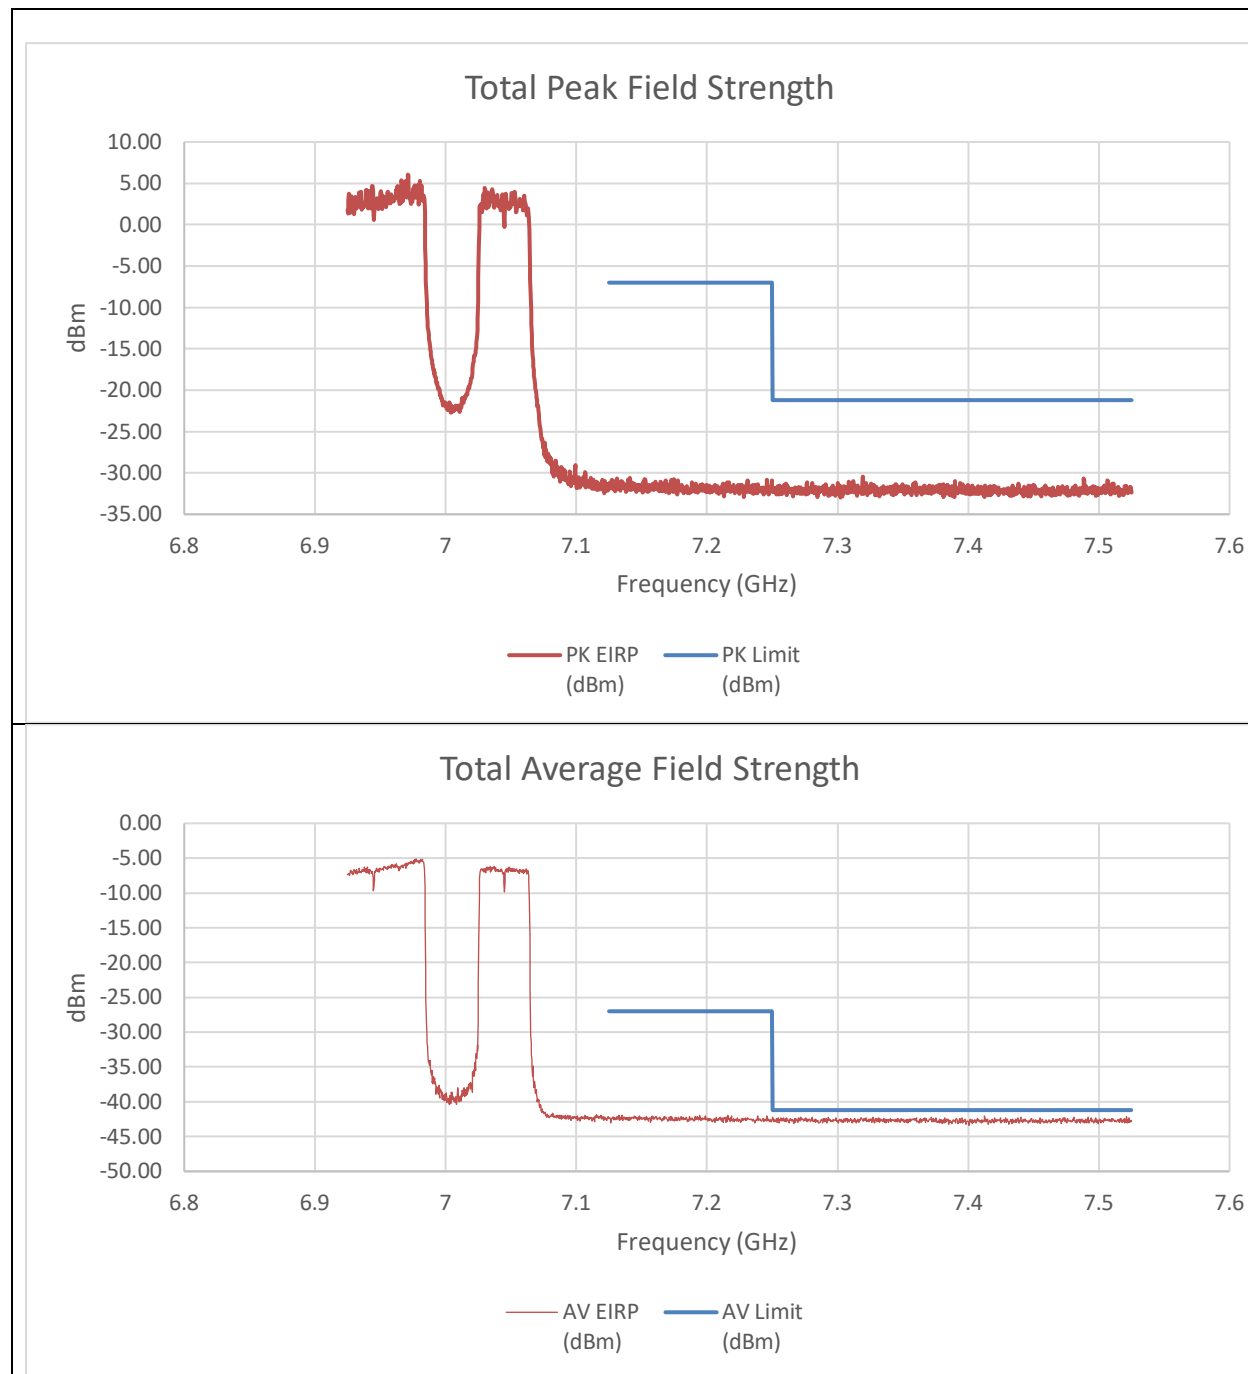


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-45.28	-45.70	-31.26	-7.00	-24.26
7.25	-46.02	-46.57	-32.07	-21.20	-10.87
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-56.69	-56.77	-42.42	-27.00	-15.42
7.25	-56.90	-56.73	-42.51	-41.20	-1.31

An array gain of 11.21 dBi and a duty cycle correction factor of 0.09 dBm was used in the calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6985MHz) – 484T+996T(NON-CONTIGUOUS)
STANDARD POWER

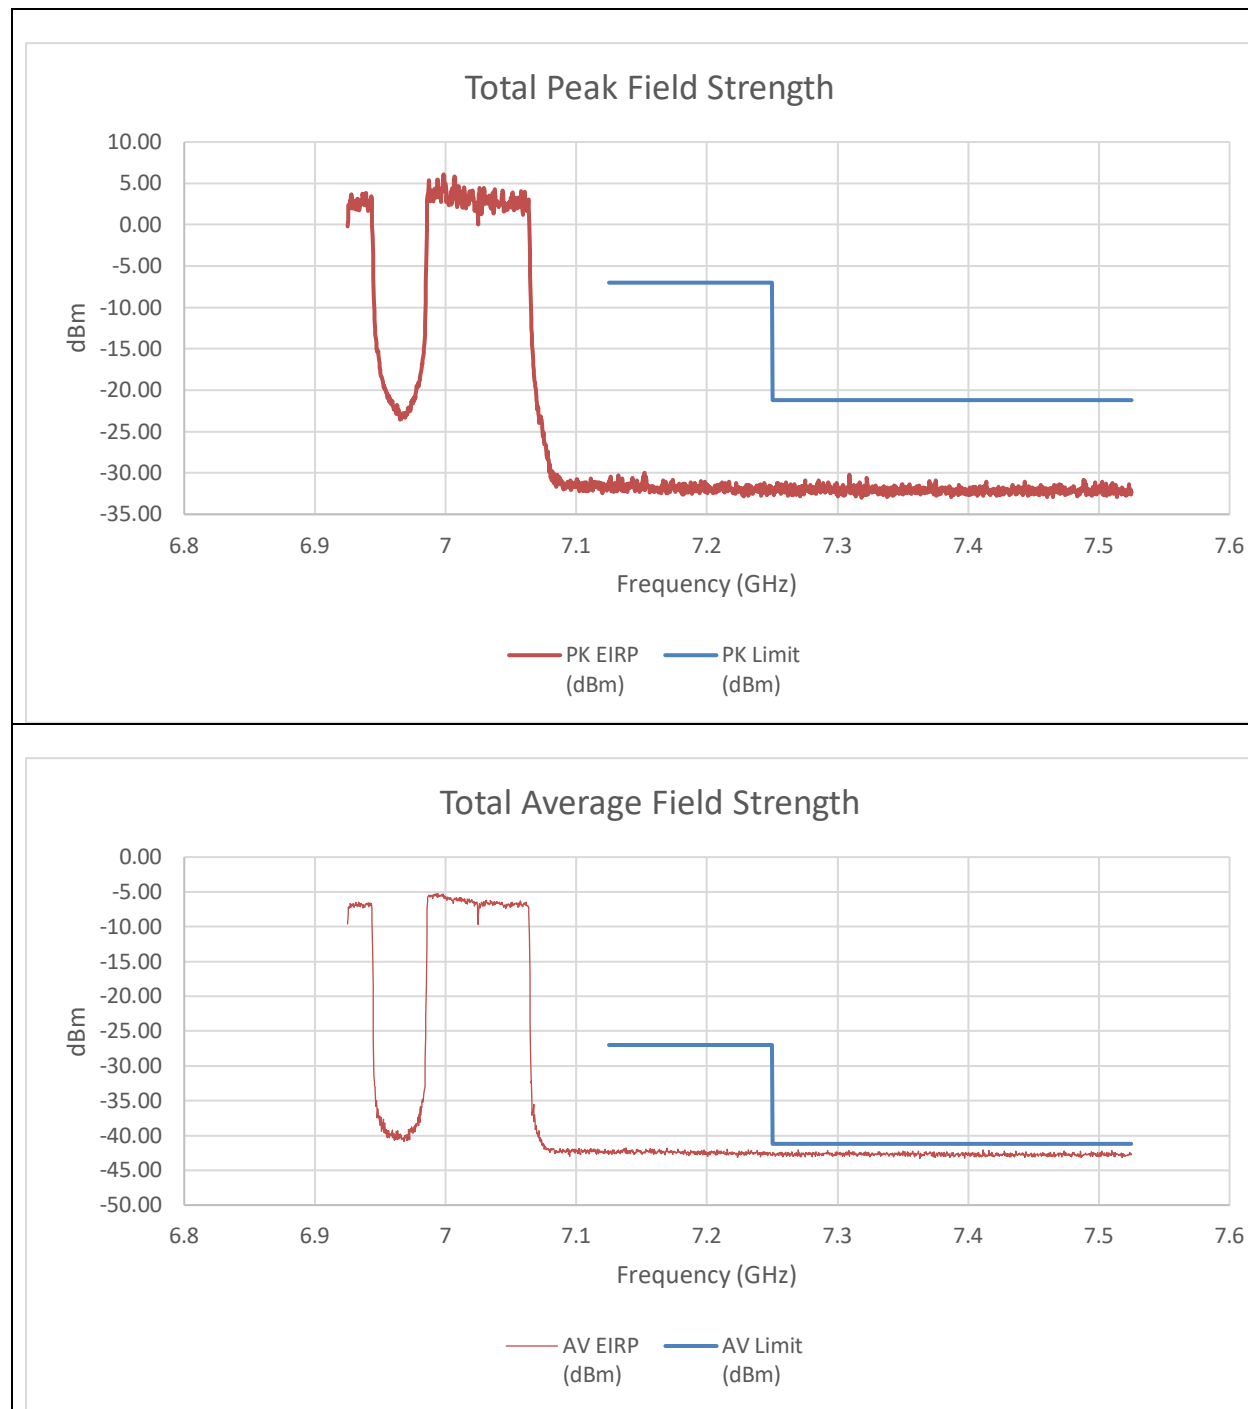


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-45.74	-45.86	-31.58	-7.00	-24.58
7.25	-46.23	-46.82	-32.29	-21.20	-11.09
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-56.35	-56.73	-42.23	-27.00	-15.23
7.25	-56.80	-56.98	-42.58	-41.20	-1.38

An array gain of 11.21 dBi and a duty cycle correction factor of 0.09 dBm was used in the calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6985MHz) – 242T+484T+996T(NON-CONTIGUOUS)
STANDARD POWER

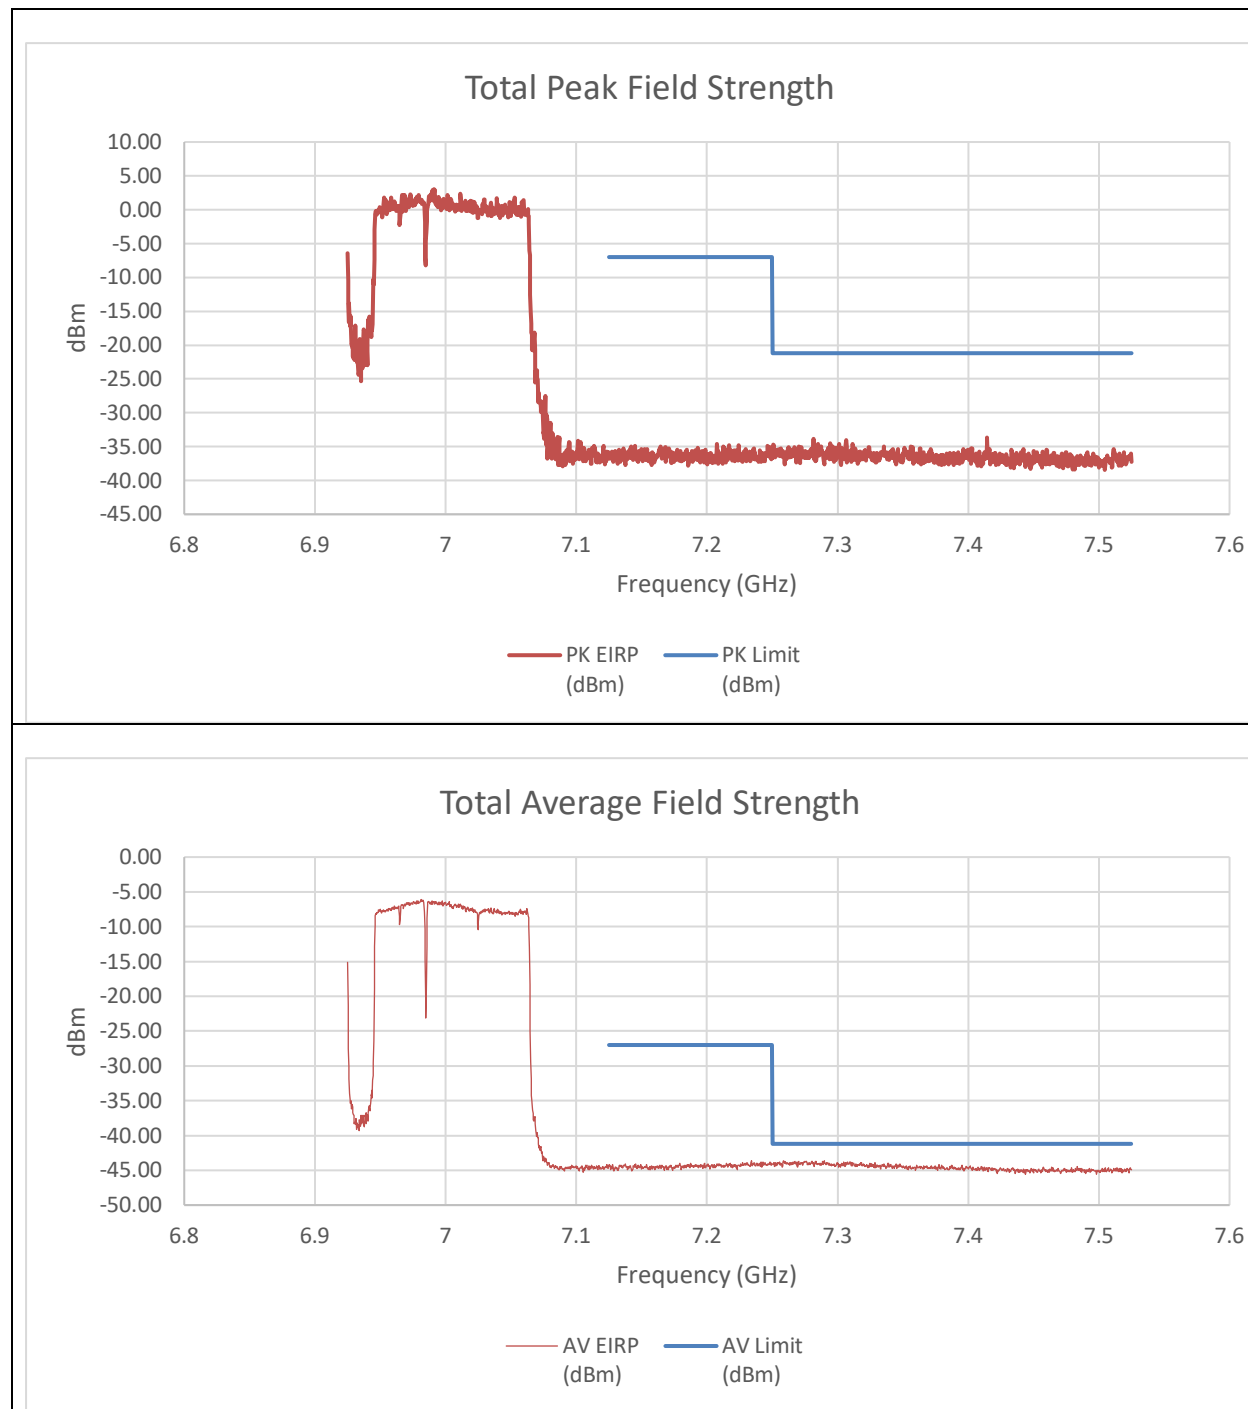


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-51.39	-50.42	-36.66	-7.00	-29.66
7.25	-48.75	-49.05	-34.68	-21.20	-13.48
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-58.72	-58.40	-44.34	-27.00	-17.34
7.25	-58.07	-58.54	-44.08	-41.20	-2.88

An array gain of 11.21 dBi was used in the calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6985MHz) – 484T+242T+996T(NON-CONTIGUOUS)
STANDARD POWER

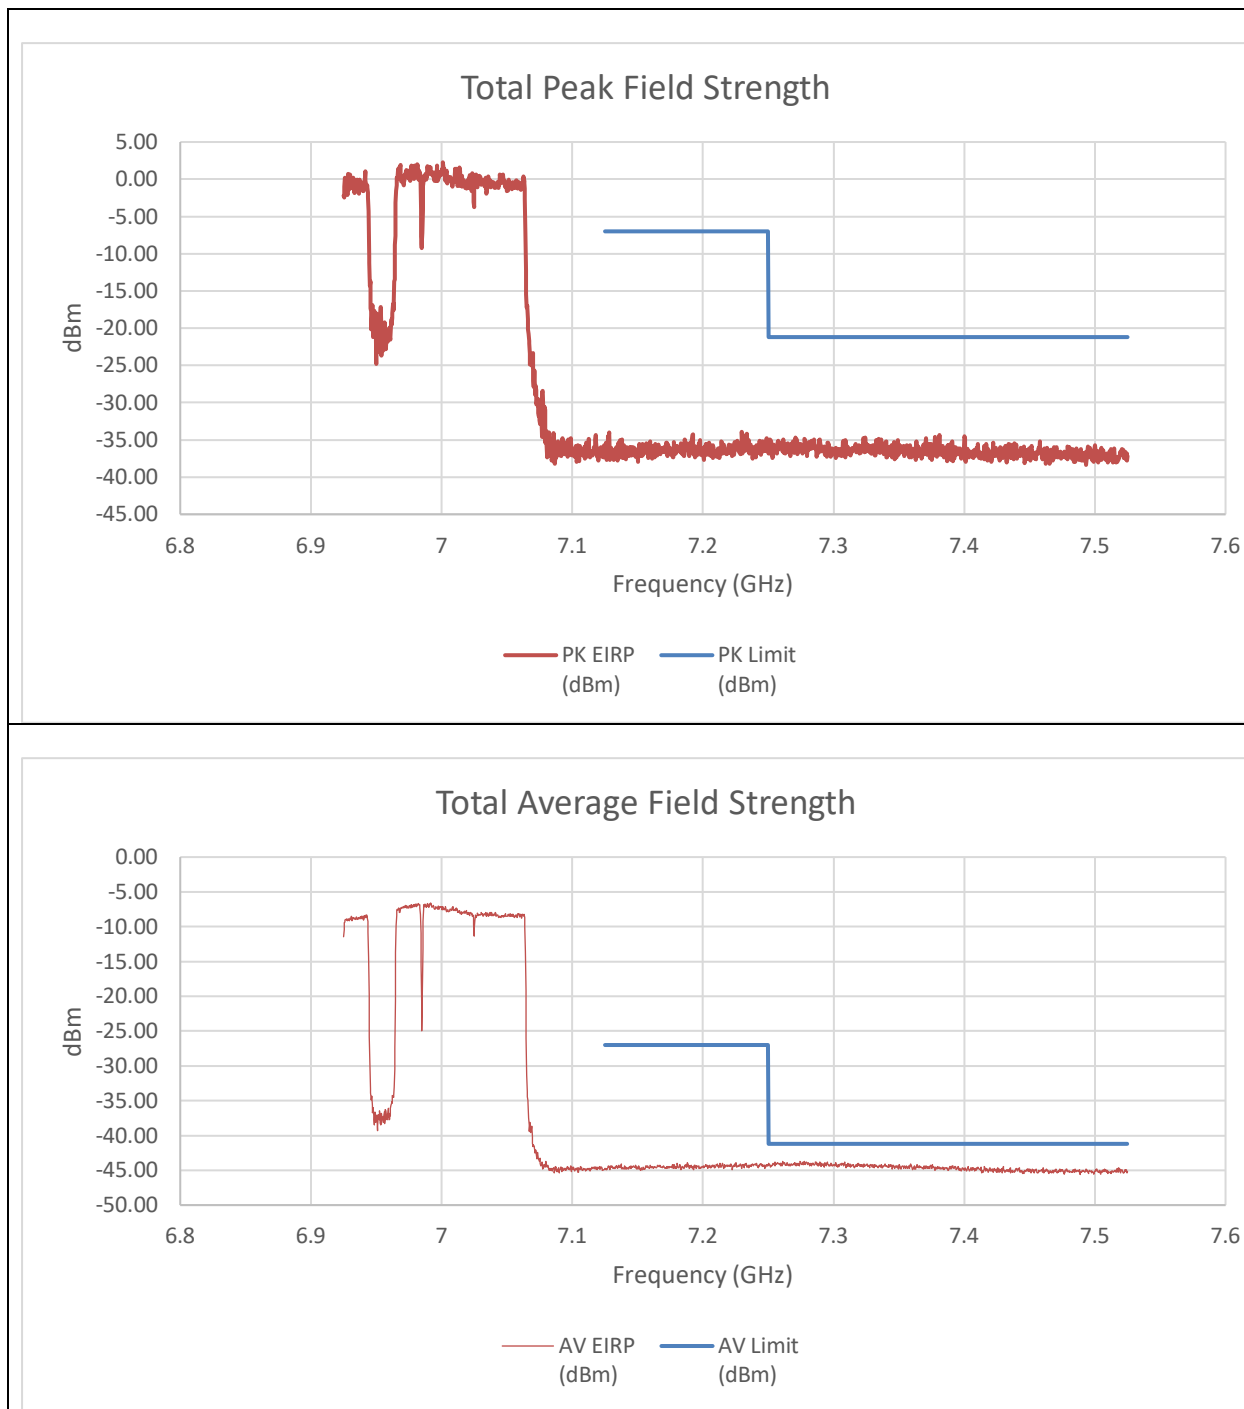


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-50.83	-49.38	-35.82	-7.00	-28.82
7.25	-50.33	-49.88	-35.88	-21.20	-14.68
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-58.74	-59.32	-44.80	-27.00	-17.80
7.25	-58.32	-58.44	-44.16	-41.20	-2.96

An array gain of 11.21 dBi was used in the calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6985MHz) – 484T+242T+996T (NON-CONTIGUOUS 2)
STANDARD POWER

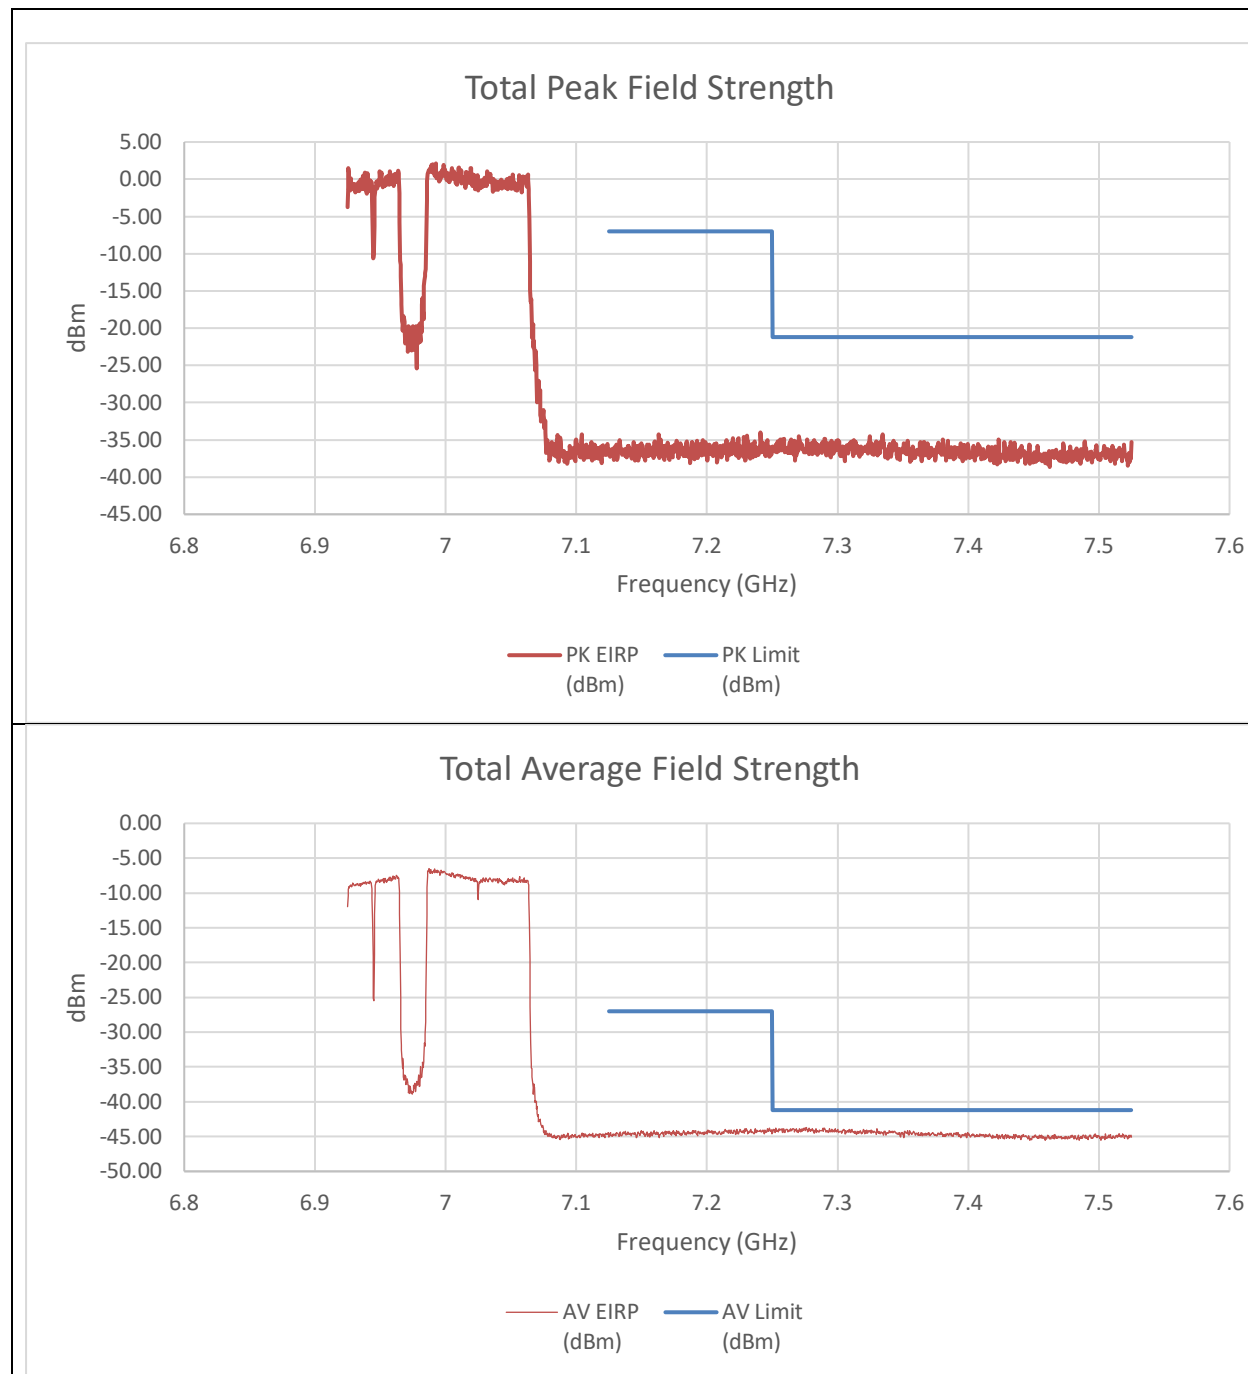


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-51.58	-51.37	-37.25	-7.00	-30.25
7.25	-51.31	-50.04	-36.41	-21.20	-15.21
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-58.87	-58.65	-44.54	-27.00	-17.54
7.25	-58.47	-57.88	-43.94	-41.20	-2.74

An array gain of 11.21 dBi was used in the calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6985MHz) – 996T+484T+242T(CONTIGUOUS)
STANDARD POWER

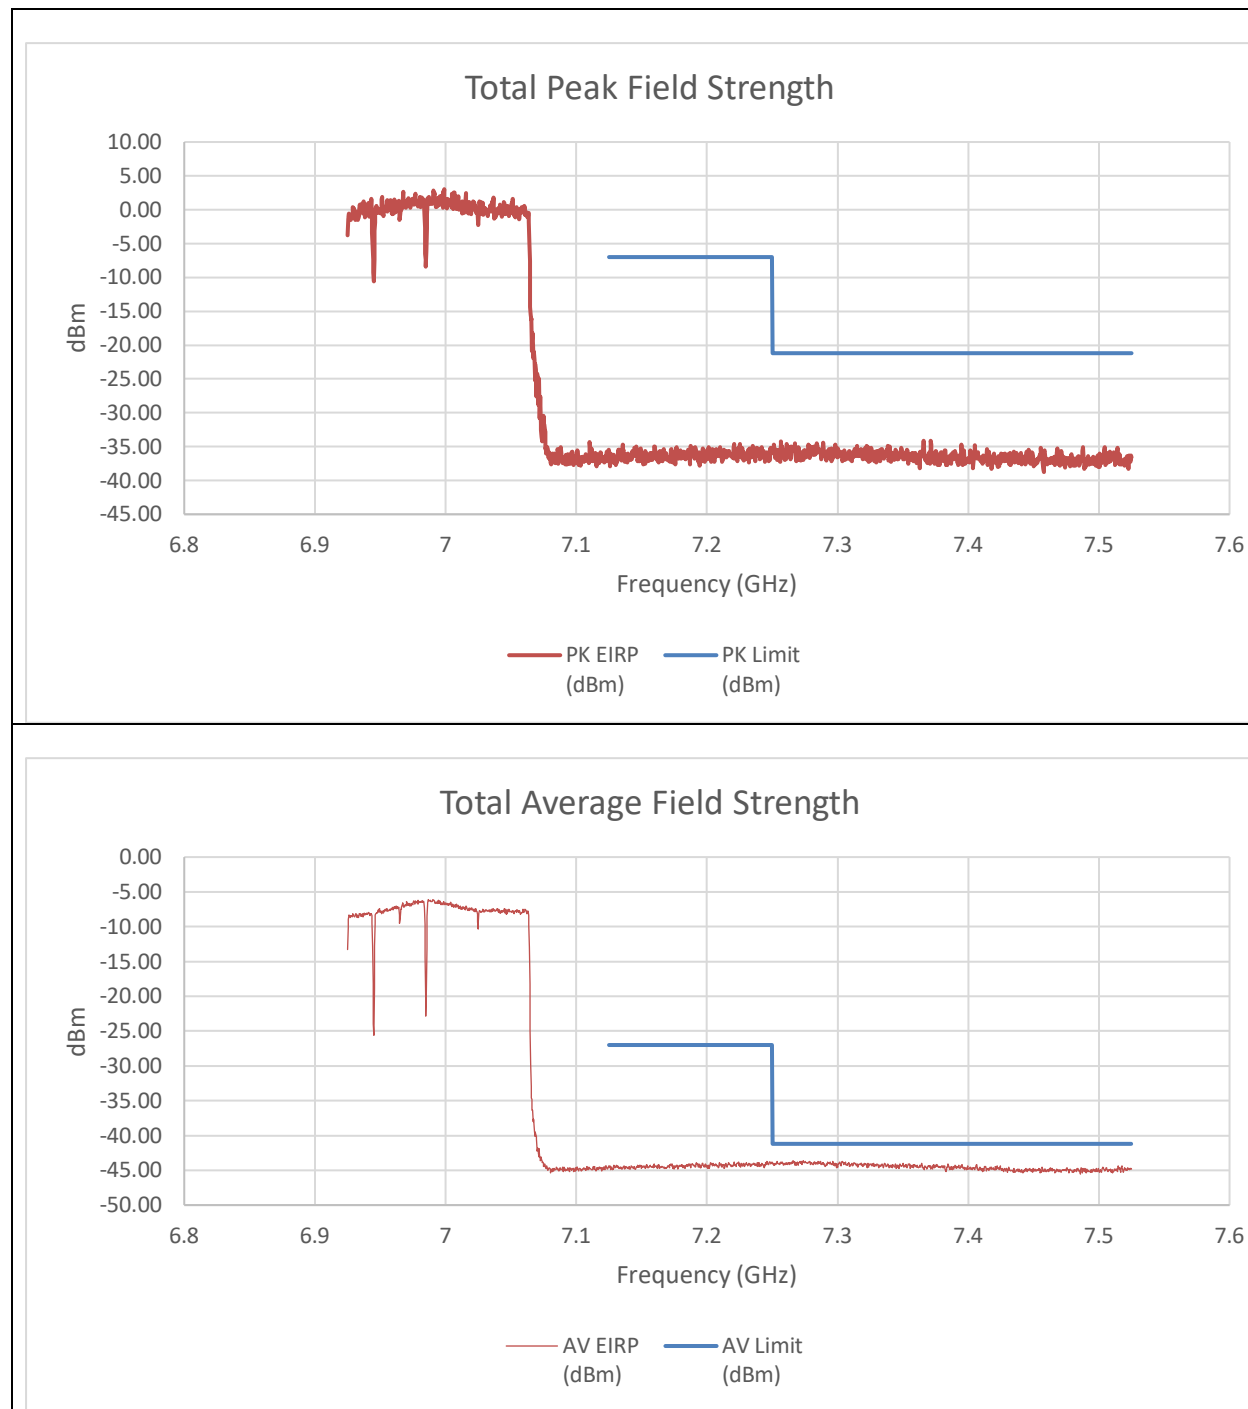


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-51.14	-51.19	-36.94	-7.00	-29.94
7.25	-50.54	-49.27	-35.64	-21.20	-14.44
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-58.53	-58.77	-44.43	-27.00	-17.43
7.25	-58.35	-58.12	-44.01	-41.20	-2.81

An array gain of 11.21 dBi was used in the calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6985MHz) – 996T+484T+242T(NON-CONTIGUOUS)
STANDARD POWER

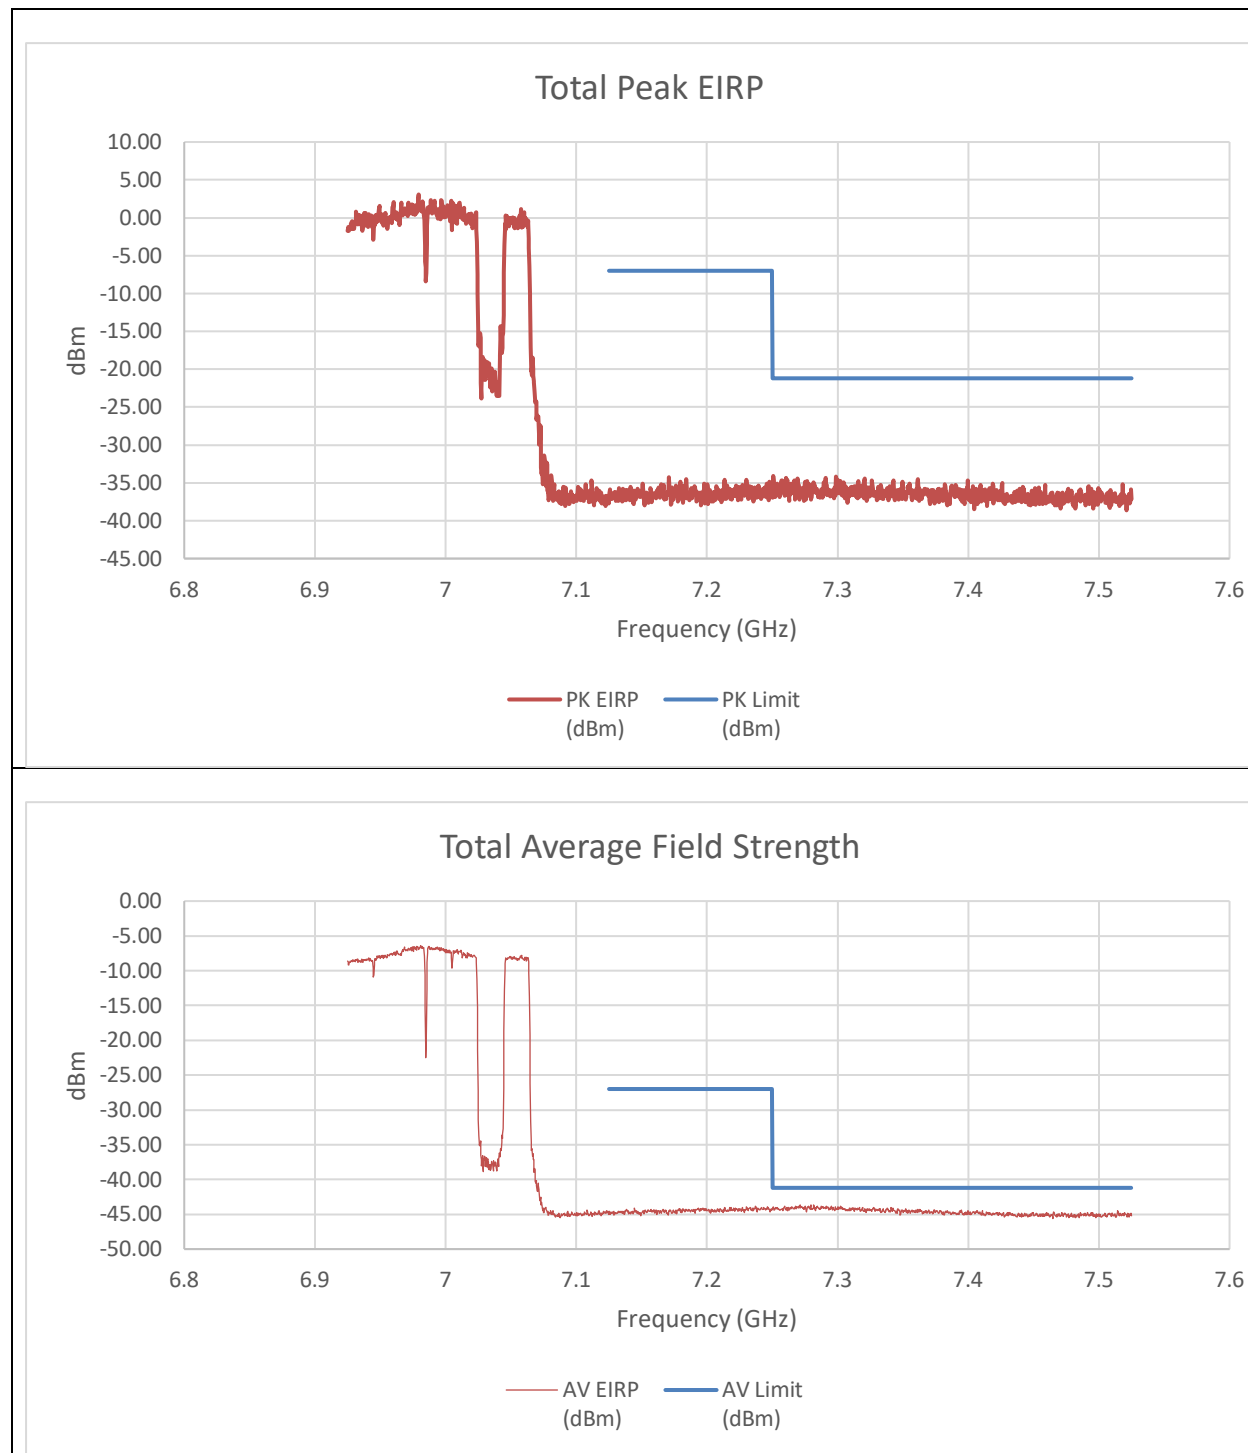


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-50.35	-50.93	-36.41	-7.00	-29.41
7.25	-50.17	-46.96	-34.05	-21.20	-12.85
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-59.39	-59.14	-45.04	-27.00	-18.04
7.25	-57.94	-58.46	-43.97	-41.20	-2.77

An array gain of 11.21 dBi was used in the calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6985MHz) – 996T+242T+484T(NON-CONTIGUOUS)
STANDARD POWER

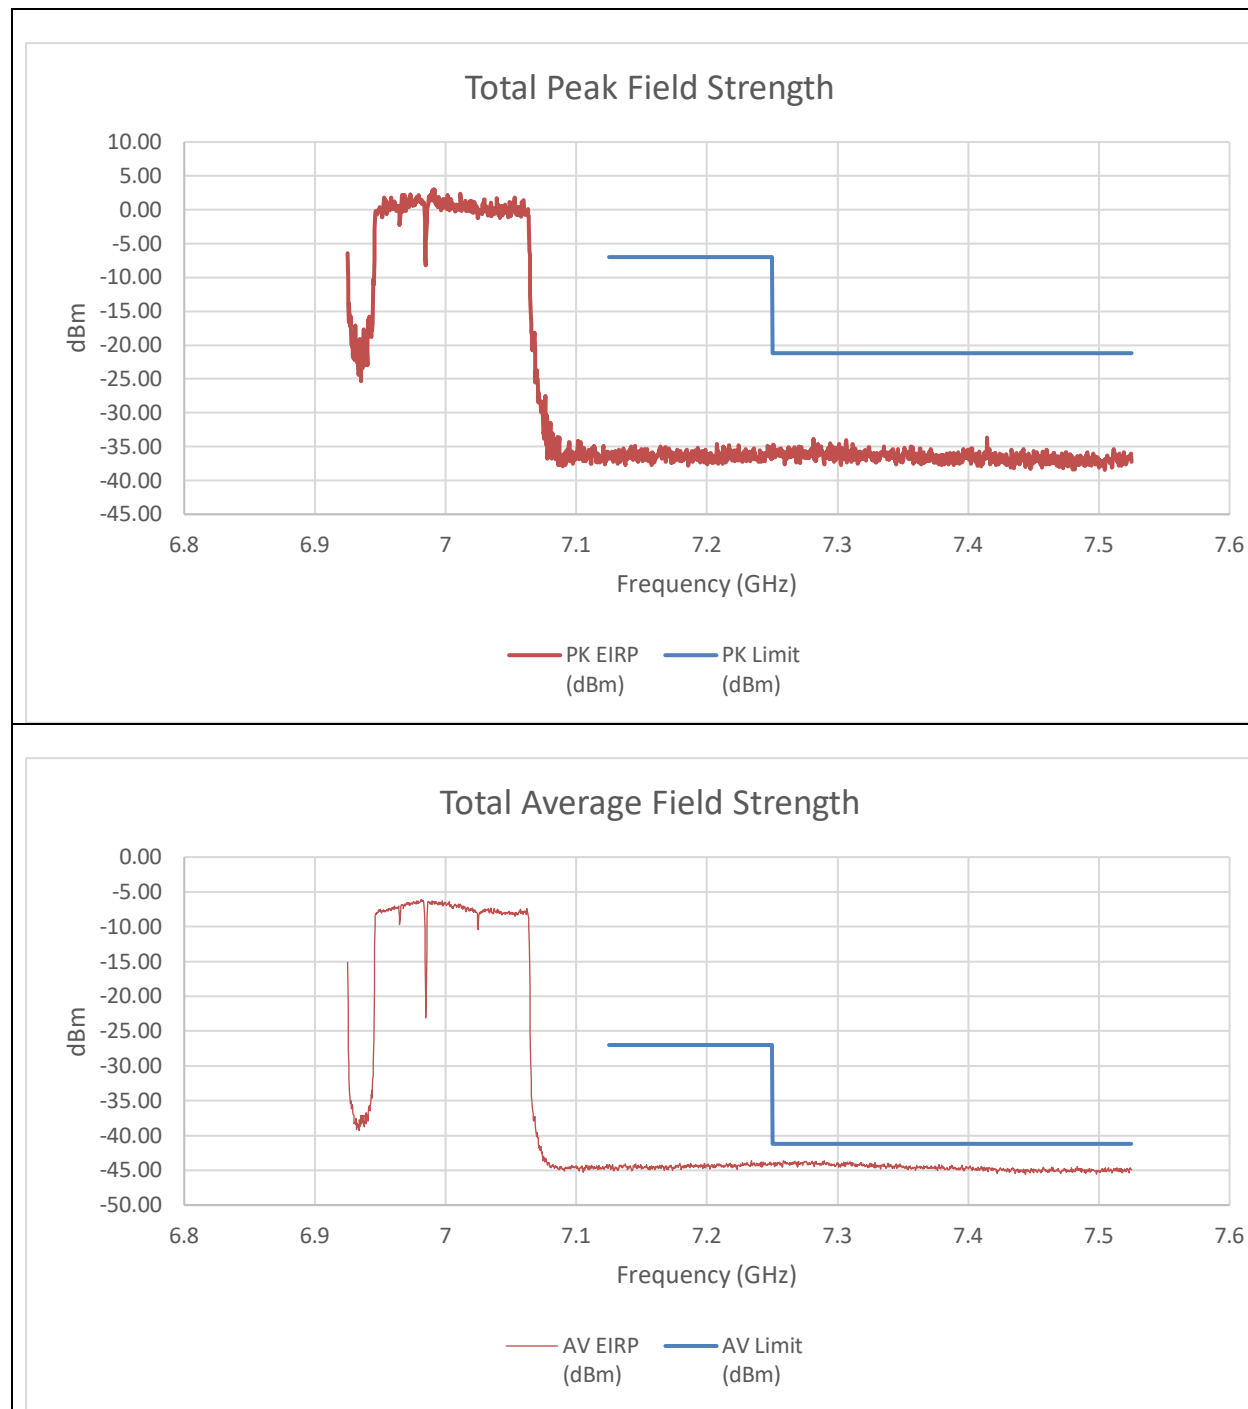


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-51.39	-50.42	-36.66	-7.00	-29.66
7.25	-48.75	-49.05	-34.68	-21.20	-13.48
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-58.72	-58.40	-44.34	-27.00	-17.34
7.25	-58.07	-58.54	-44.08	-41.20	-2.88

An array gain of 11.21 dBi was used in the calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6985MHz) – 996T+242T+484T(NON-CONTIGUOUS 2)
STANDARD POWER

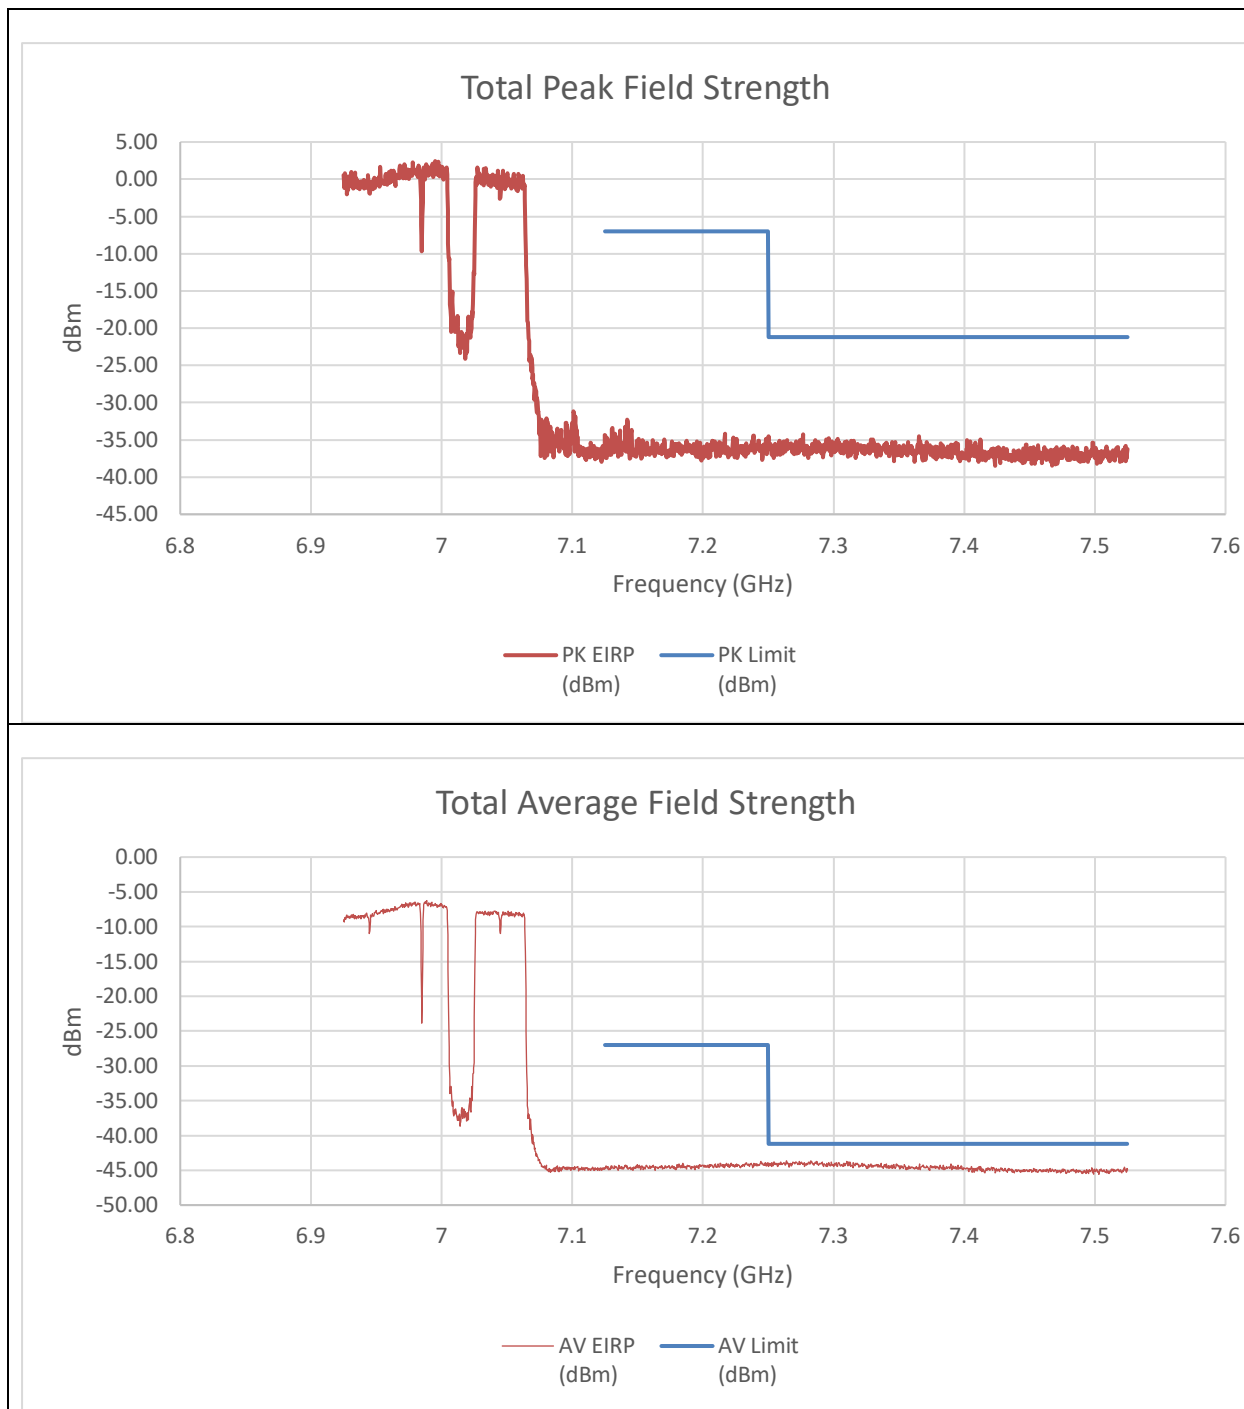


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-51.64	-51.65	-37.42	-7.00	-30.42
7.25	-49.38	-50.56	-35.71	-21.20	-14.51
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-58.76	-58.45	-44.38	-27.00	-17.38
7.25	-58.39	-58.37	-44.16	-41.20	-2.96

An array gain of 11.21 dBi was used in the calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6985MHz) – 2x996T STANDARD POWER

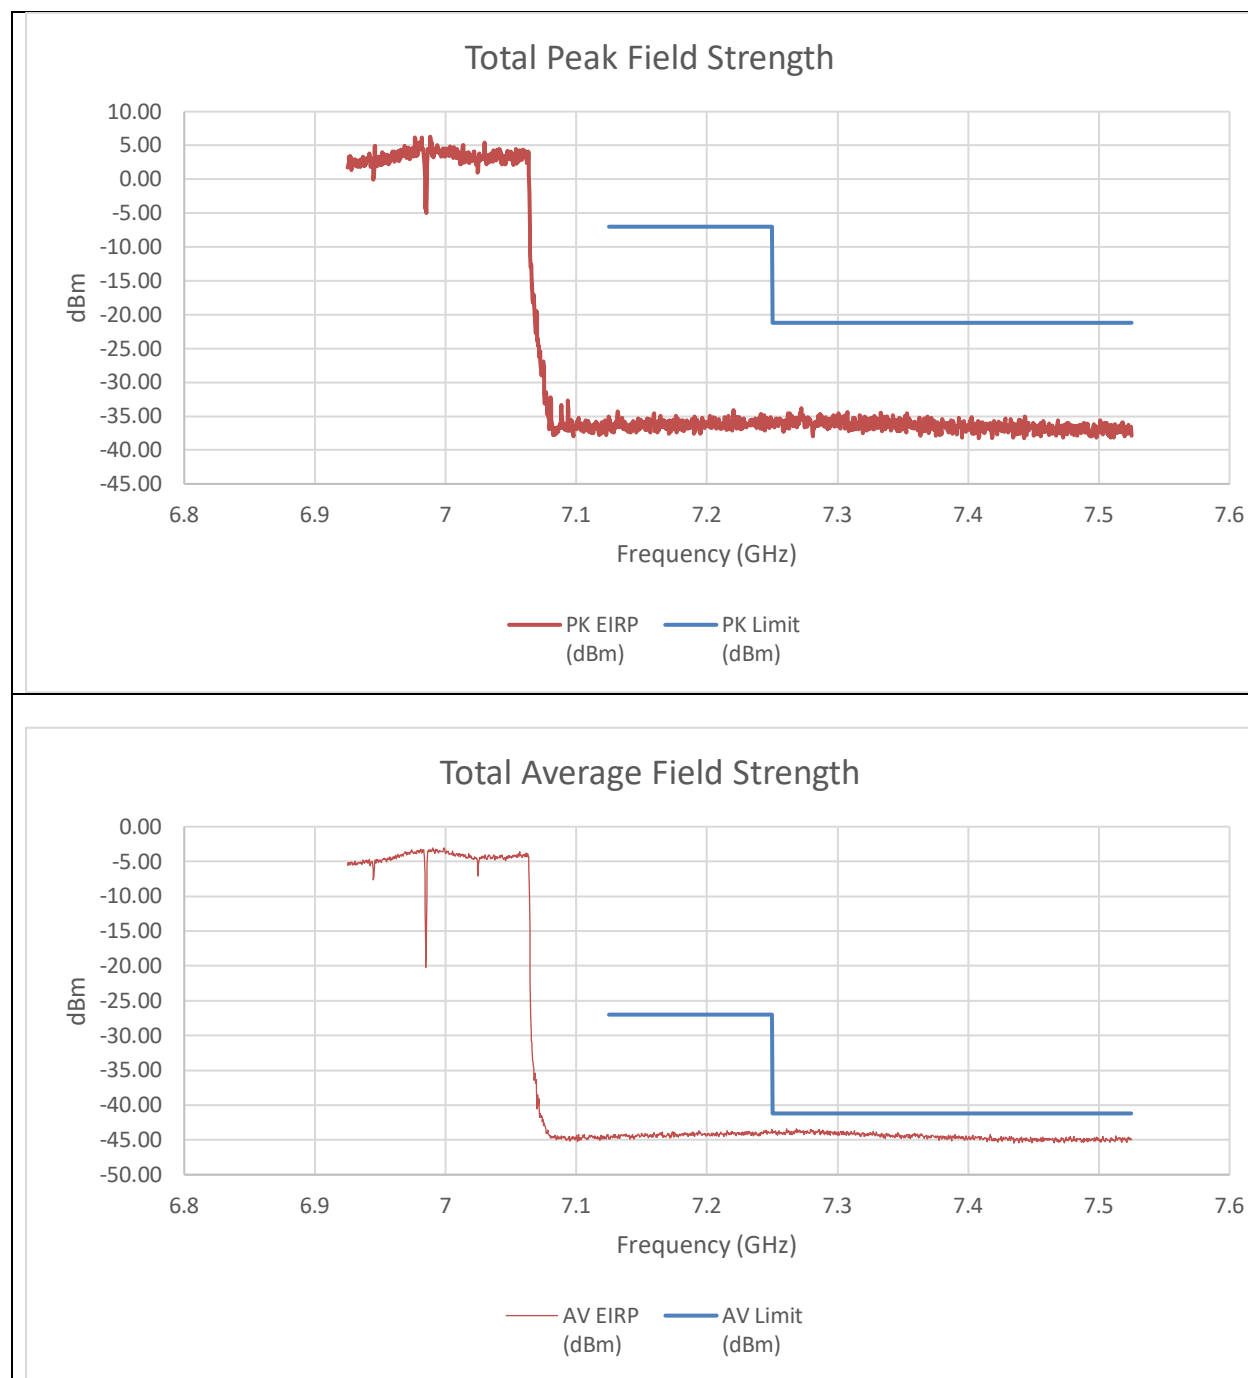


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-49.80	-50.46	-35.90	-7.00	-28.90
7.25	-49.93	-50.16	-35.82	-21.20	-14.62
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-59.24	-58.96	-44.88	-27.00	-17.88
7.25	-57.78	-58.18	-43.76	-41.20	-2.56

An array gain of 11.21 dBi was used in the calculation of the summed data.

9.6.36. 802.11be EHT320 MODE 2TX IN THE UNII-8 BAND (HIGH GAIN)

HIGH CHANNEL RESTRICTED BAND EDGE (6905MHz) – 2x996T+484T(CONTIGUOUS) STANDARD POWER

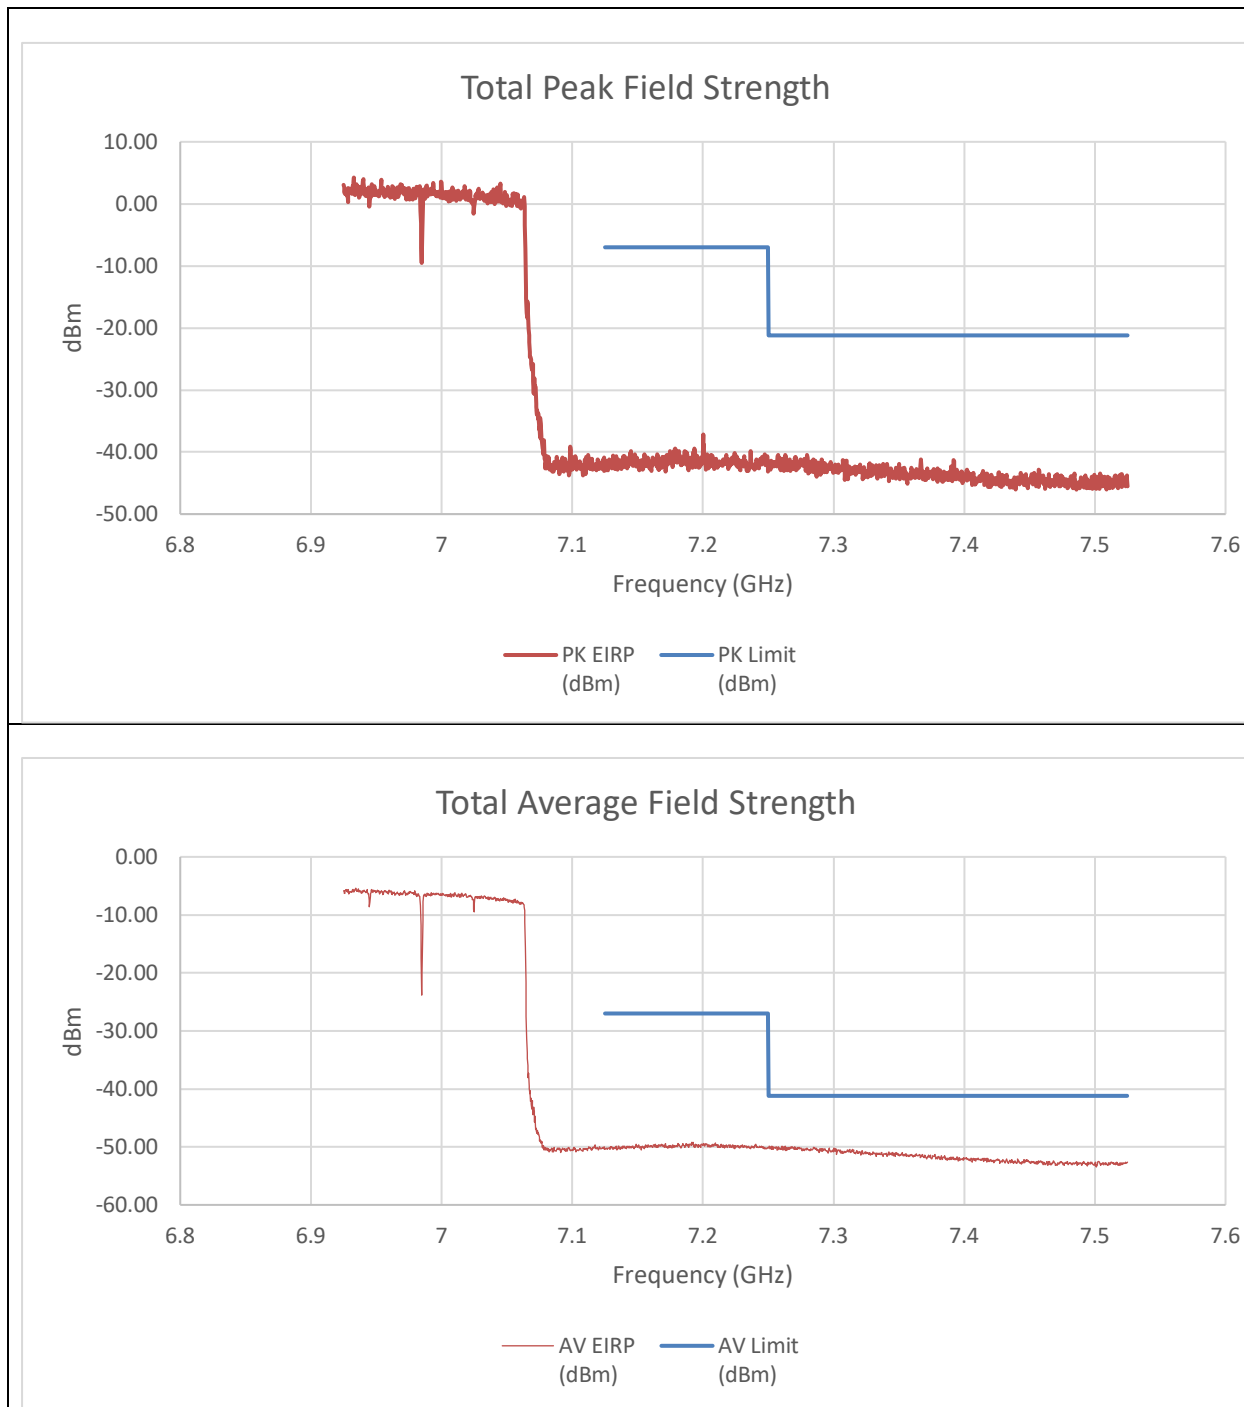


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-57.57	-56.82	-42.96	-7.00	-35.96
7.25	-56.25	-55.69	-41.74	-21.20	-20.54
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-64.49	-64.92	-50.34	-27.00	-23.34
7.25	-63.87	-64.66	-49.89	-41.20	-8.69

An array gain of 11.21 dBi and a duty cycle correction factor of 0.14 dBm was used in the calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6905MHz) – 2x996T+484T(NON-CONTIGUOUS)
STANDARD POWER

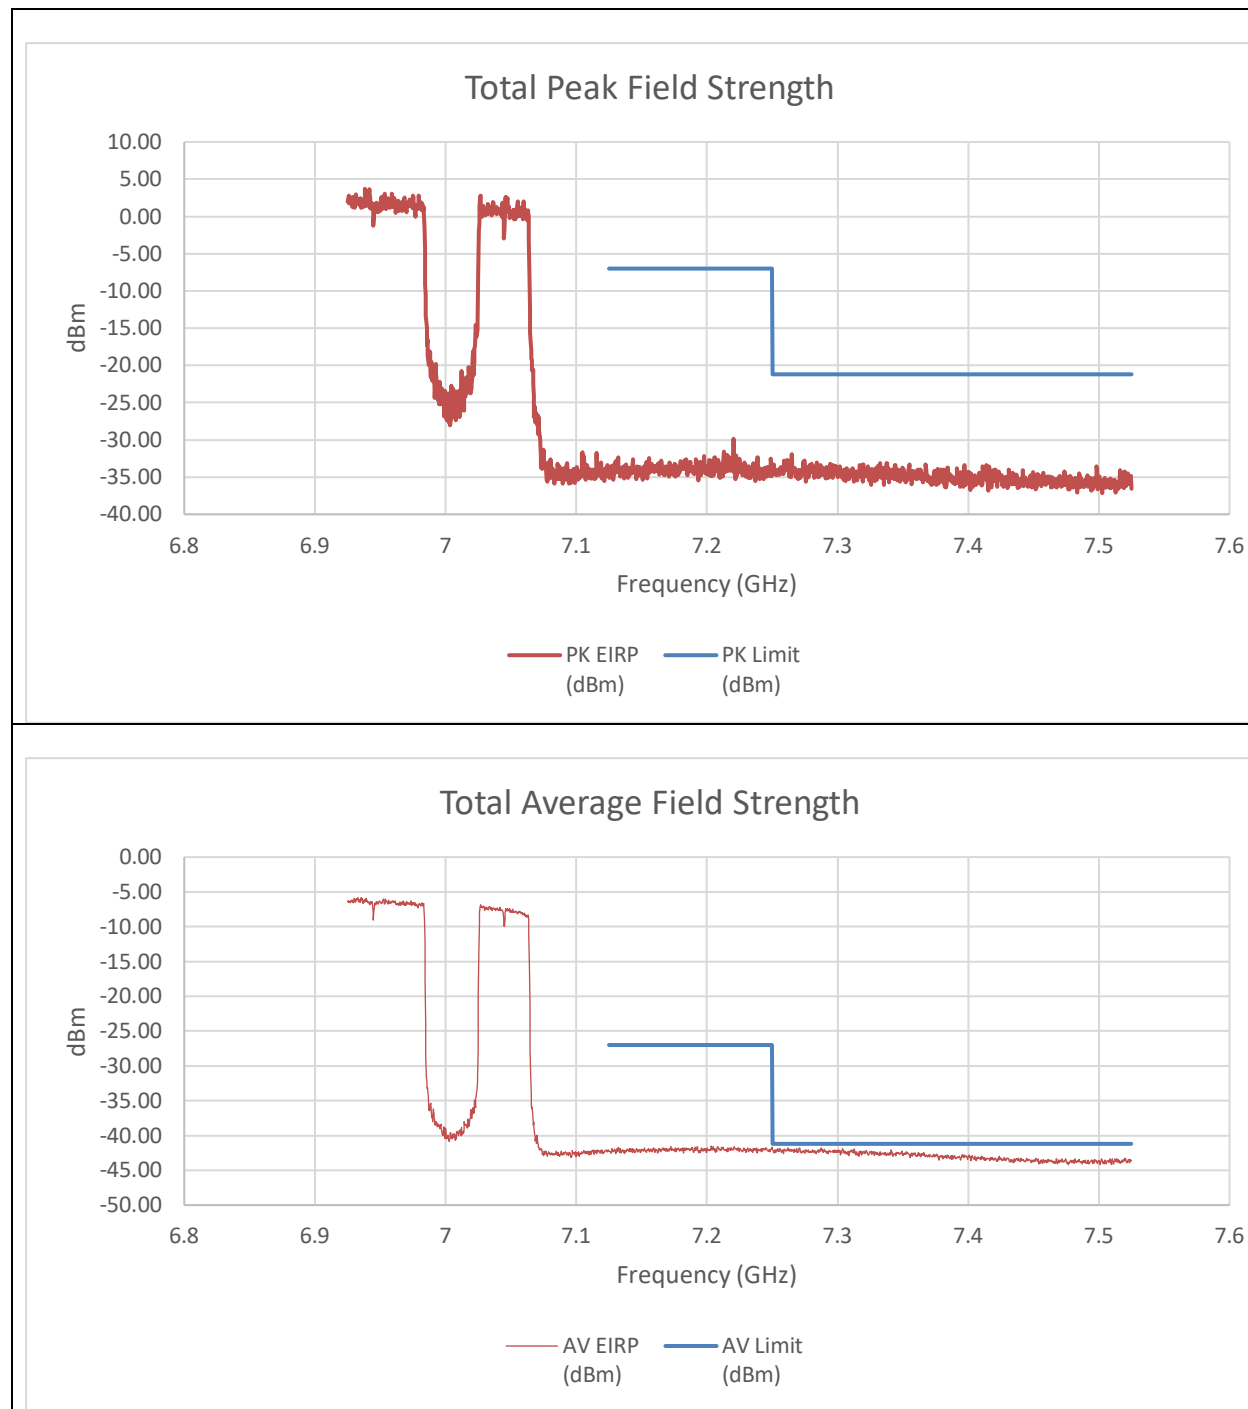


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-47.22	-49.58	-34.02	-7.00	-27.02
7.25	-48.85	-47.36	-33.82	-21.20	-12.62
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-56.47	-57.04	-42.38	-27.00	-15.38
7.25	-56.35	-56.95	-42.28	-41.20	-1.08

An array gain of 11.21 dBi and a duty cycle correction factor of 0.14 dBm was used in the calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6905MHz) – 484T+2x996T(NON-CONTIGUOUS)
STANDARD POWER

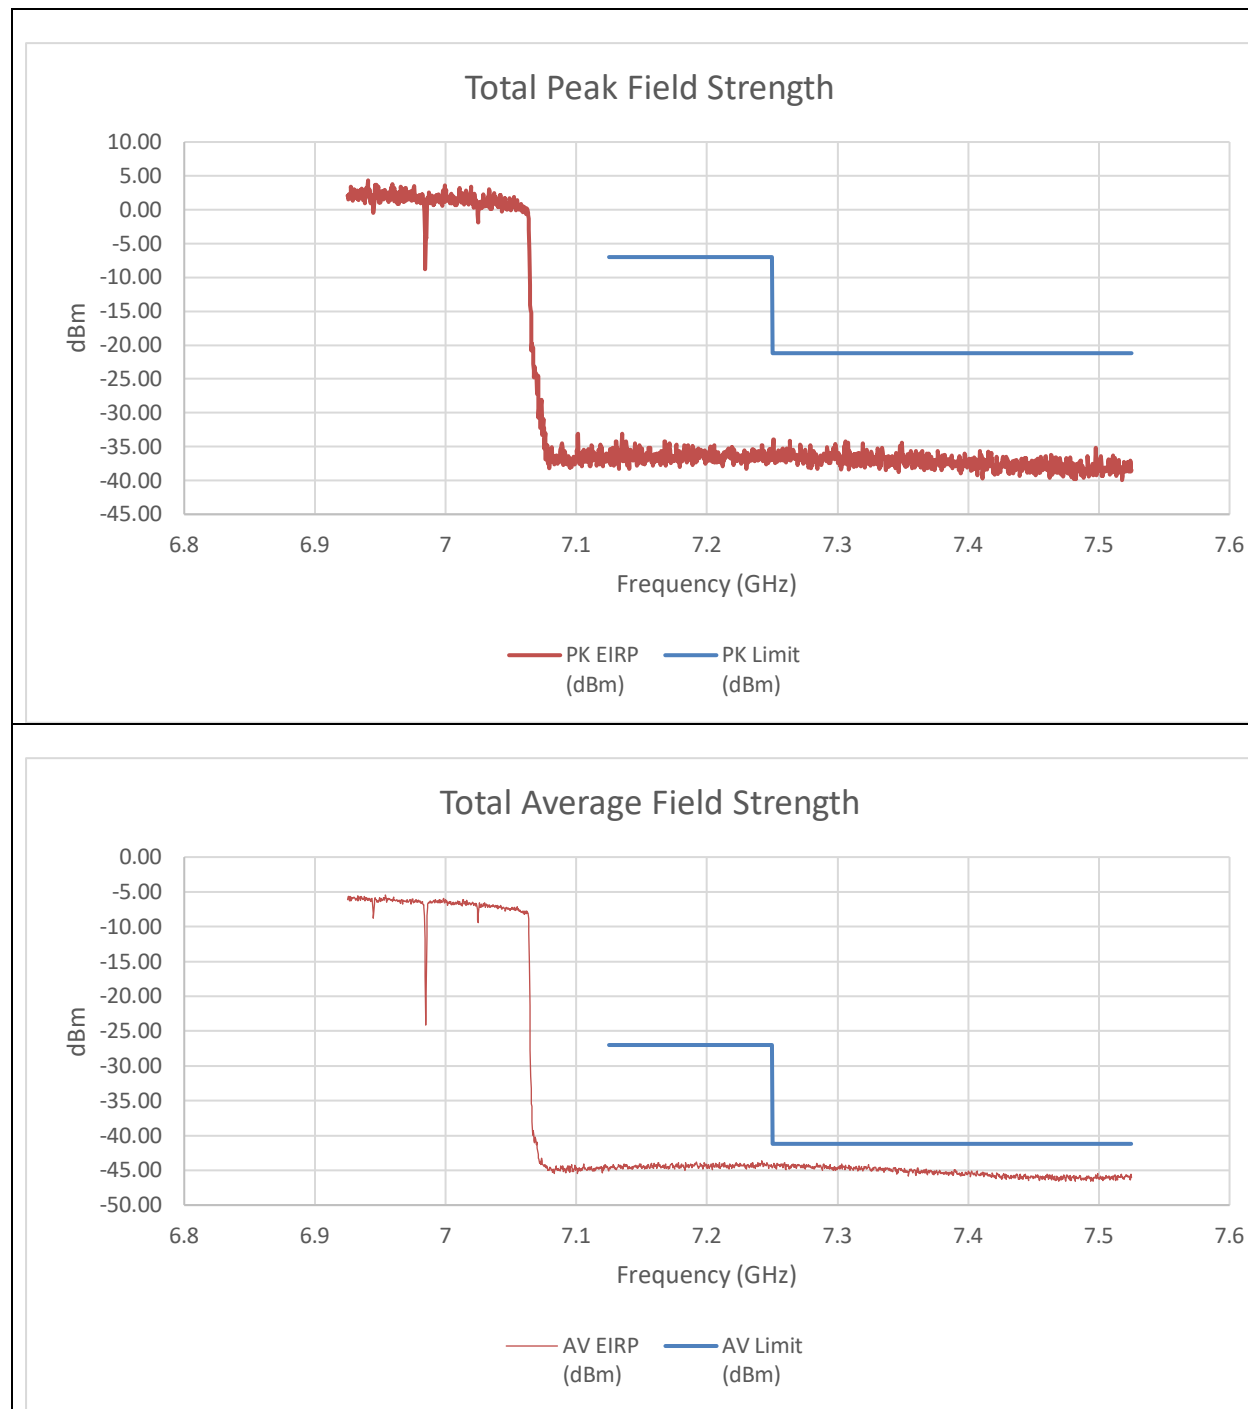


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-47.54	-53.36	-35.32	-7.00	-28.32
7.25	-45.42	-57.66	-33.96	-21.20	-12.76
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-56.64	-64.06	-44.57	-27.00	-17.57
7.25	-56.26	-64.81	-44.34	-41.20	-3.14

An array gain of 11.21 dBi and a duty cycle correction factor of 0.14 dBm was used in the calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6905MHz) – 996T+484T+996T(NON-CONTIGUOUS)
STANDARD POWER

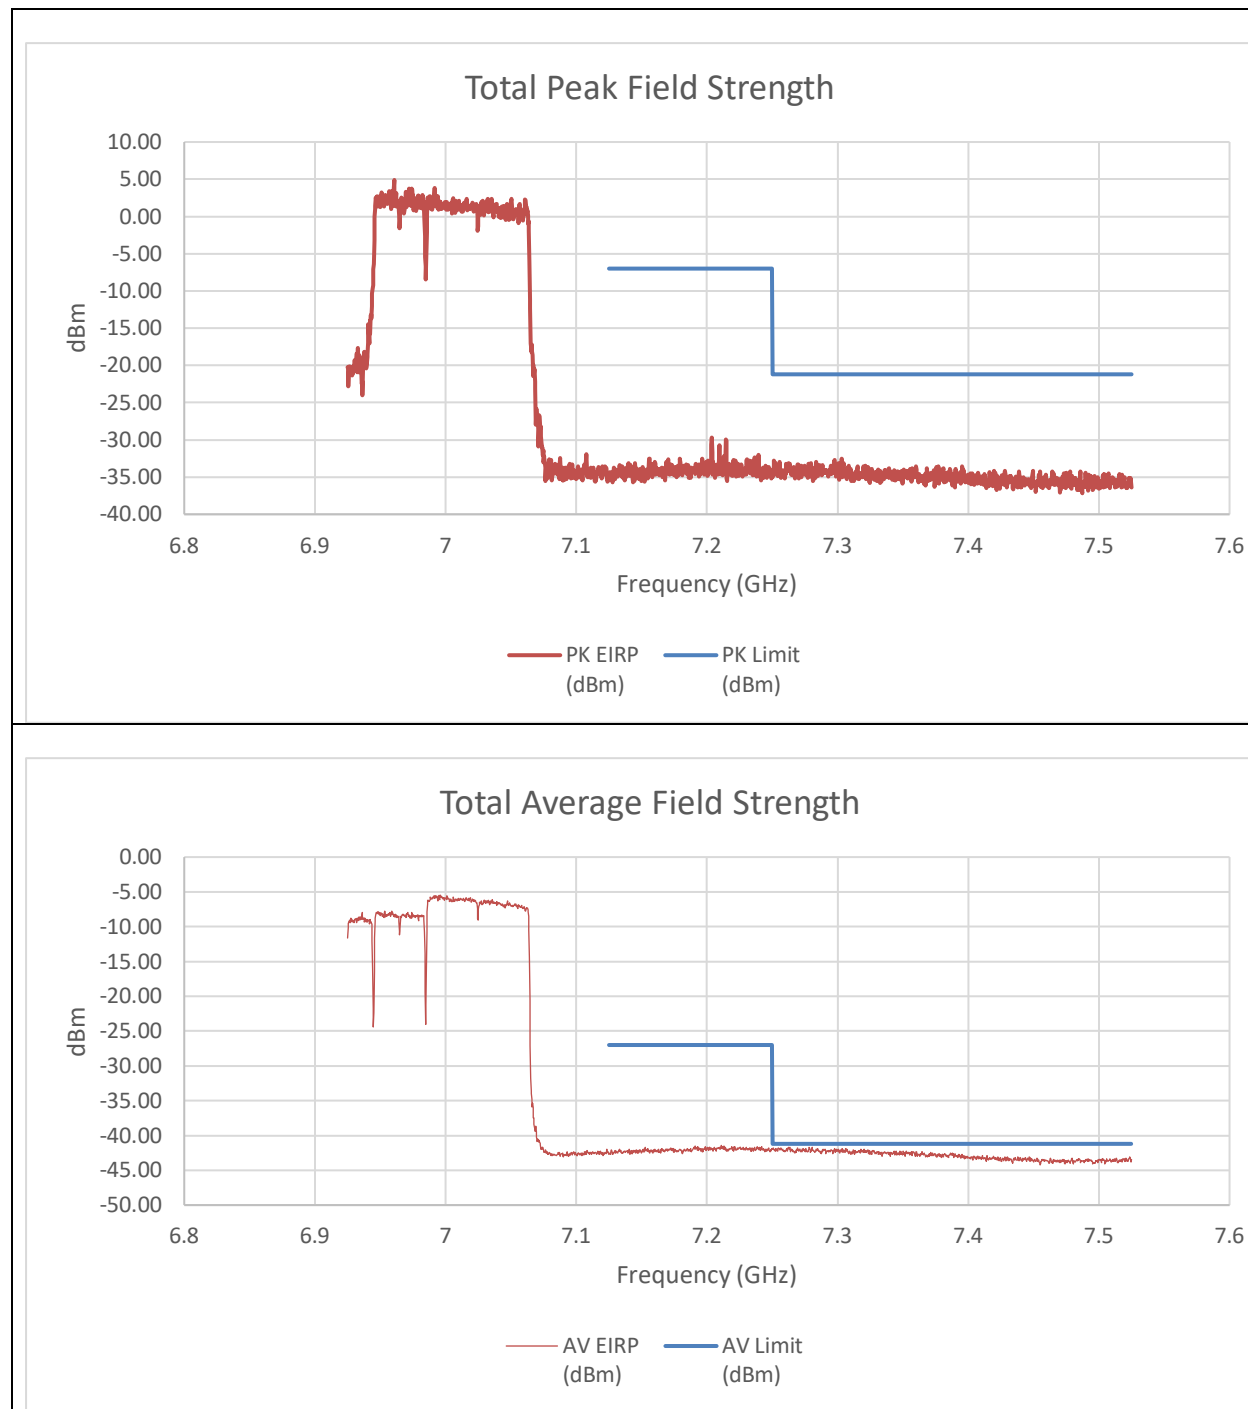


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-48.28	-48.93	-34.37	-7.00	-27.37
7.25	-49.74	-47.28	-34.12	-21.20	-12.92
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-56.68	-57.29	-42.62	-27.00	-15.62
7.2625	-56.21	-55.95	-41.72	-41.2	-0.52

An array gain of 11.21 dBi and a duty cycle correction factor of 0.14 dBm was used in the calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6905MHz) – 996T+484T+996T(NON-CONTIGUOUS 2)
STANDARD POWER

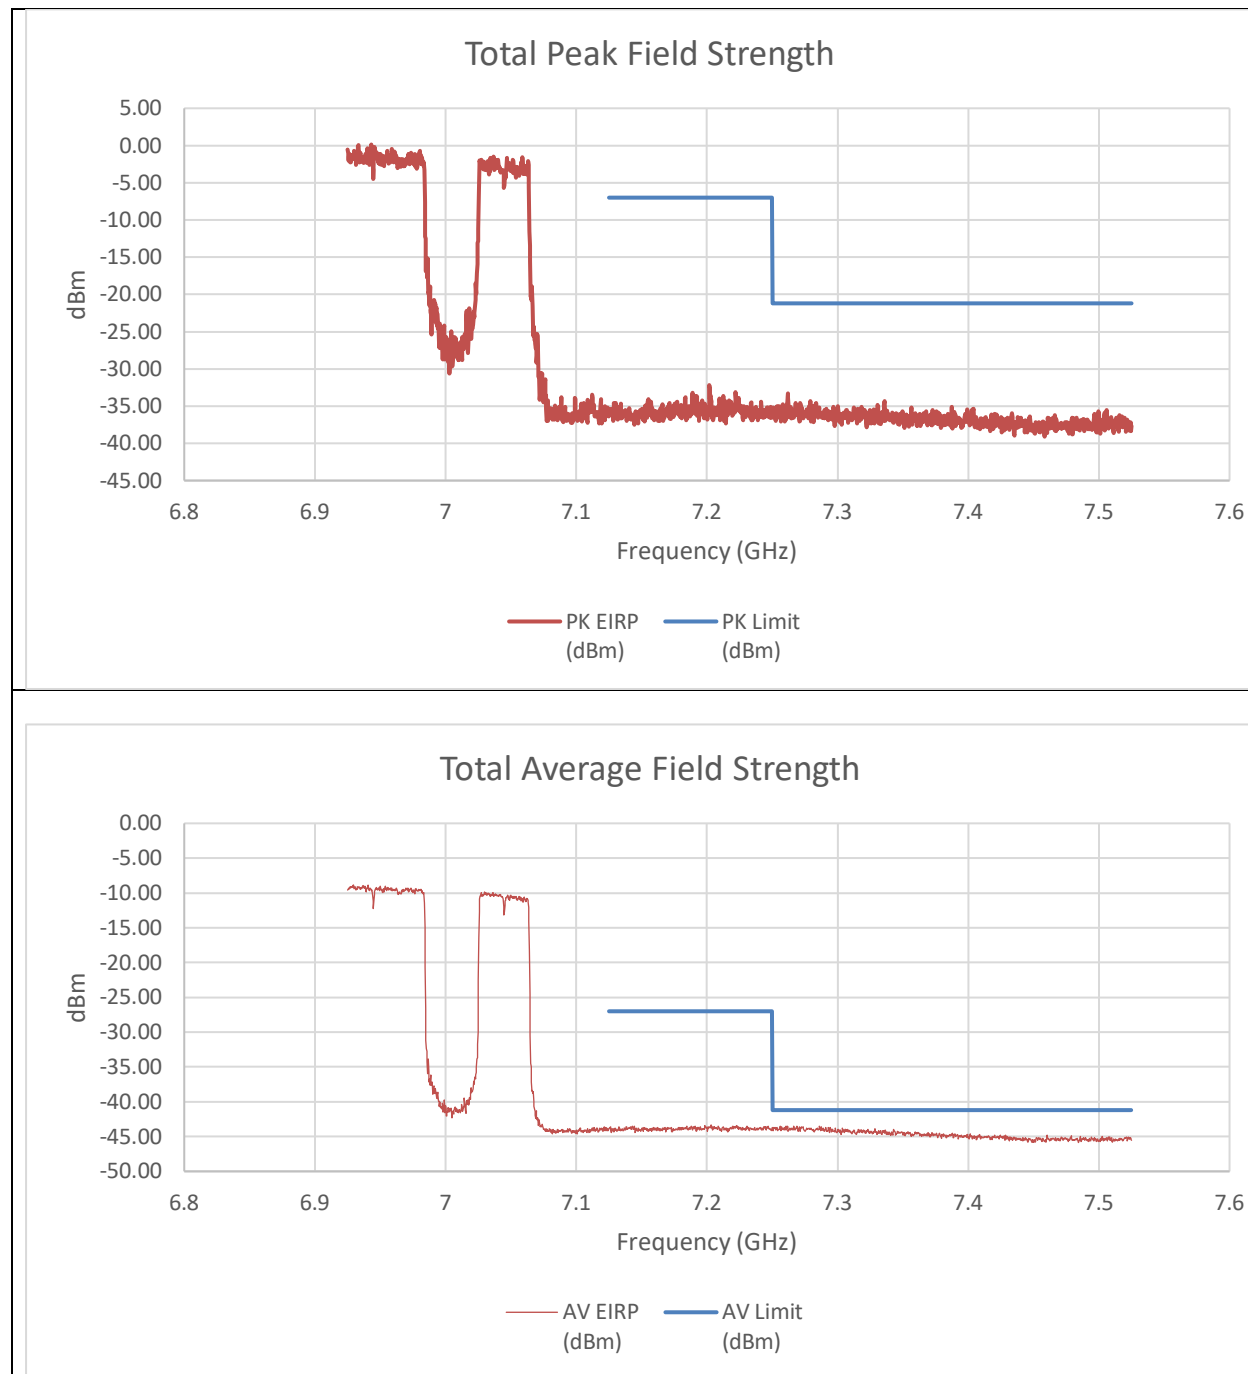


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-50.19	-49.14	-35.41	-7.00	-28.41
7.25	-49.71	-49.15	-35.20	-21.20	-14.00
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-58.01	-58.10	-43.69	-27.00	-16.69
7.25	-58.35	-58.68	-44.15	-41.20	-2.95

An array gain of 11.21 dBi and a duty cycle correction factor of 0.14 dBm was used in the calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6905MHz) – 3x996T(CONTIGUOUS) STANDARD POWER

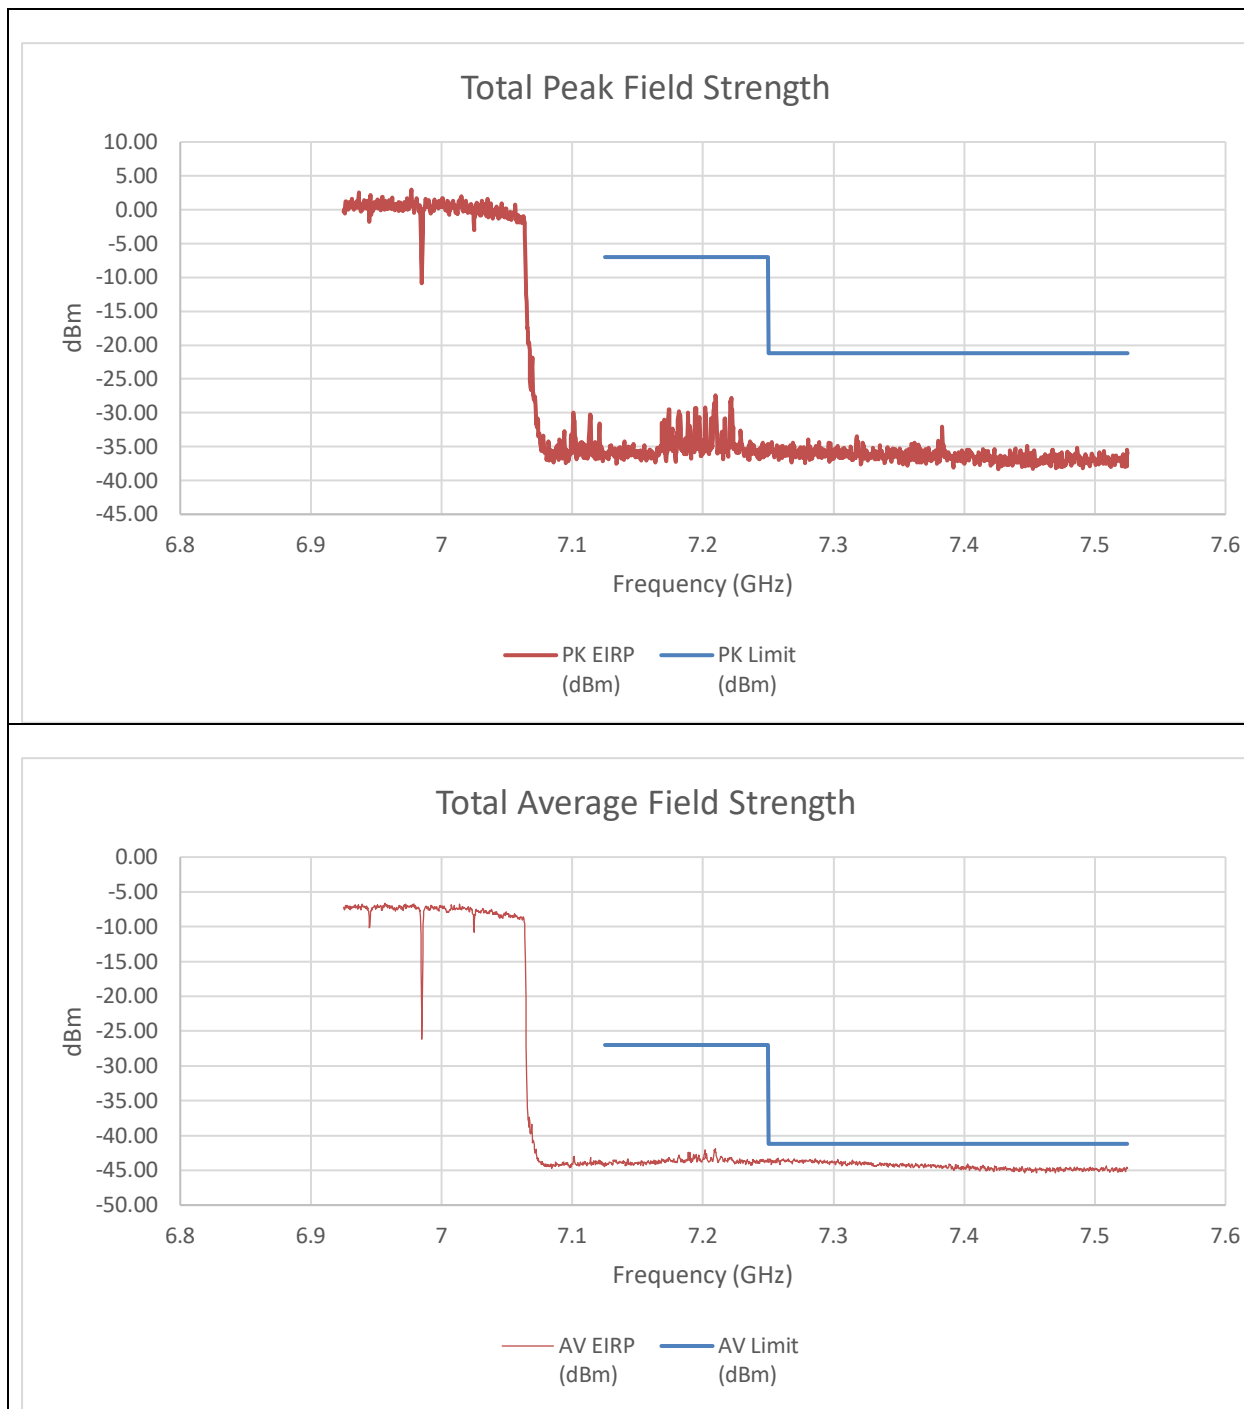


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-50.87	-50.09	-36.24	-7.00	-29.24
7.25	-50.69	-49.64	-35.91	-21.20	-14.71
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-58.91	-58.28	-44.20	-27.00	-17.20
7.25	-58.30	-58.14	-43.83	-41.20	-2.63

An array gain of 11.21 dBi and a duty cycle correction factor of 0.16 dBm was used in the calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6905MHz) – 3x996T(NON-CONTIGUOUS) STANDARD POWER

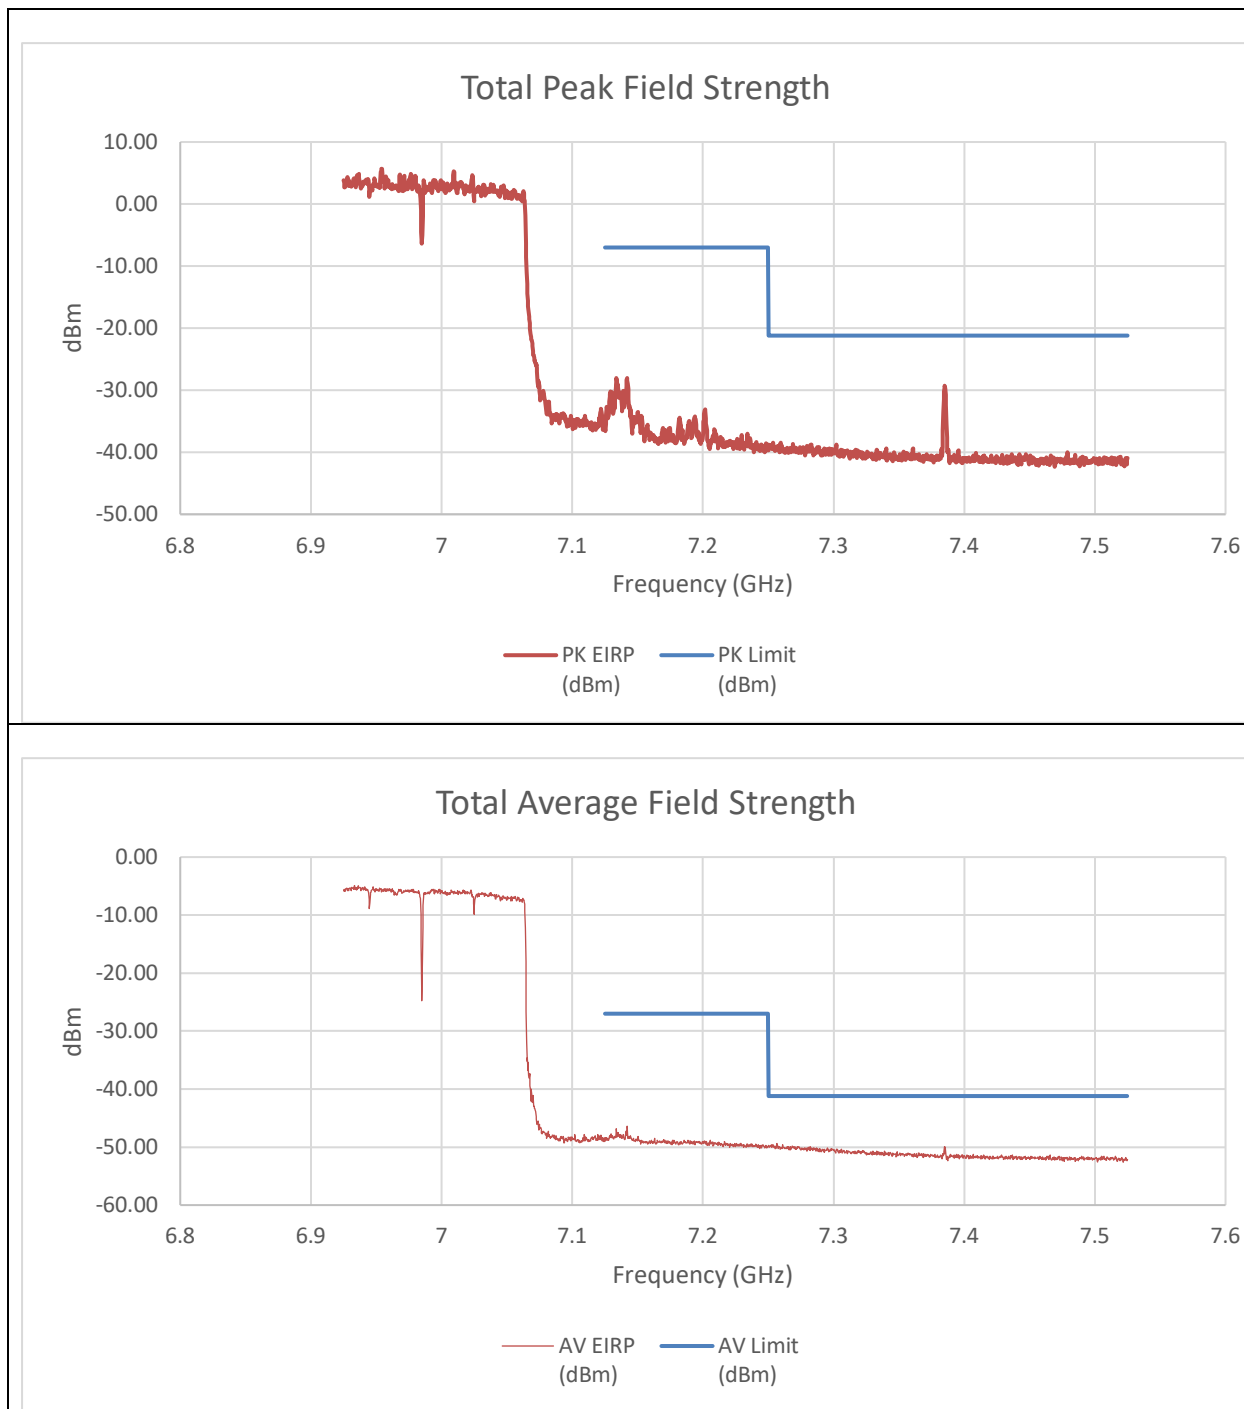


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-46.23	-51.83	-33.96	-7.00	-26.96
7.3852	-51.49	-40.85	-29.28	-21.2	-8.08
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-62.15	-64.55	-48.80	-27.00	-21.80
7.25	-64.12	-64.78	-50.05	-41.20	-8.85

An array gain of 11.21 dBi and a duty cycle correction factor of 0.16 dBm was used in the calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6905MHz) – 3x996T(NON-CONTIGUOUS 2)
STANDARD POWER

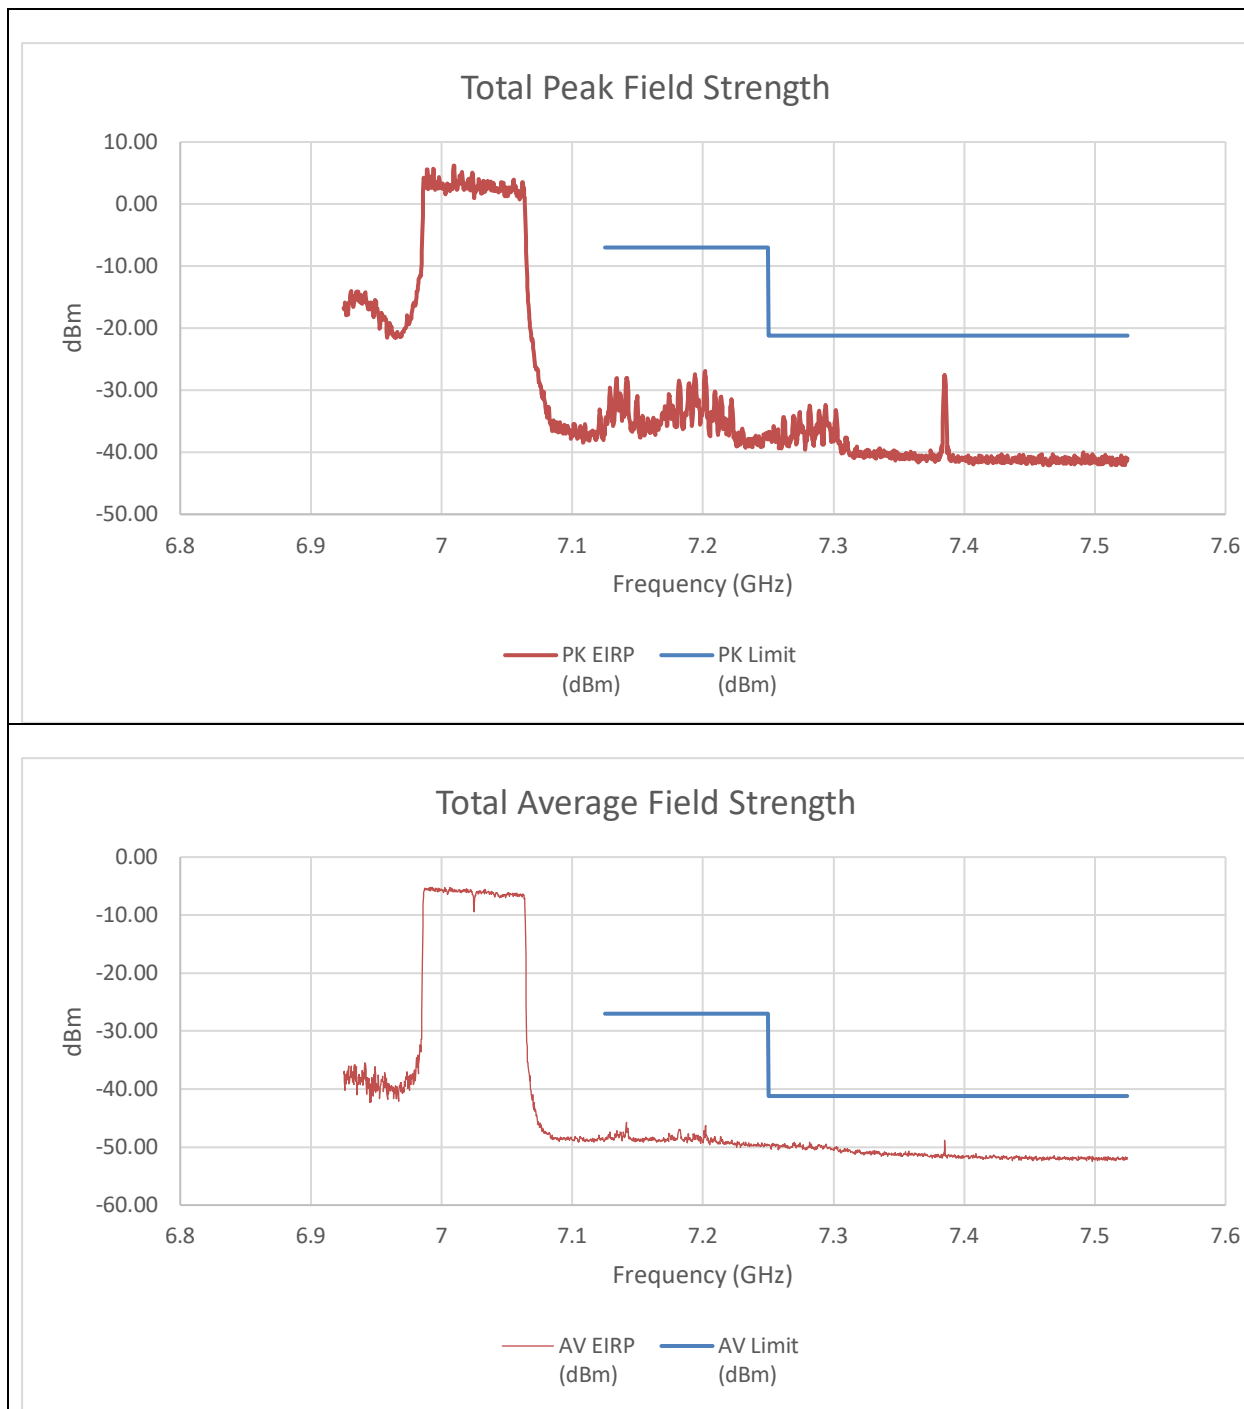


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.2016	-40.1	-42.58	-26.95	-7	-19.95
7.3849	-45.52	-39.78	-27.54	-21.2	-6.34
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-62.79	-63.51	-48.75	-27.00	-21.75
7.25	-63.82	-64.17	-49.61	-41.20	-8.41

An array gain of 11.21 dBi and a duty cycle correction factor of 0.16 dBm was used in the calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6905MHz) – 3x996T+484T(CONTIGUOUS) STANDARD POWER

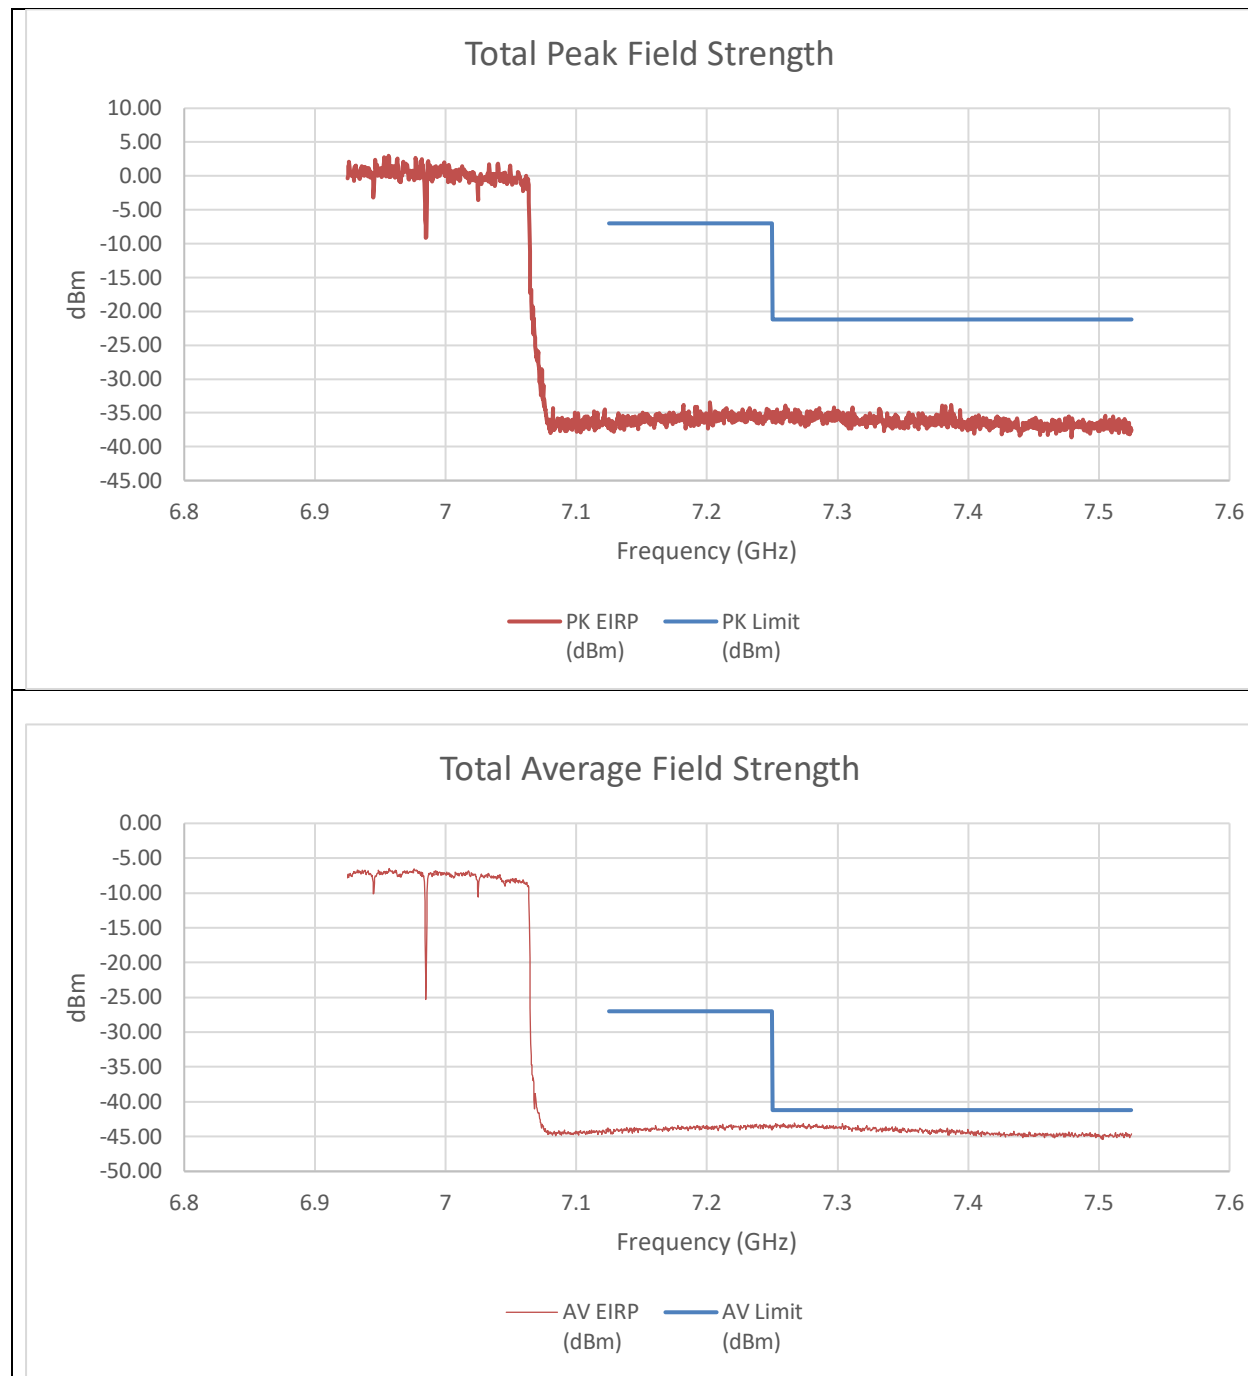


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-50.35	-51.13	-36.50	-7.00	-29.50
7.25	-50.18	-50.15	-35.94	-21.20	-14.74
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-58.53	-58.22	-43.96	-27.00	-16.96
7.25	-58.38	-57.95	-43.75	-41.20	-2.55

An array gain of 11.21 dBi and a duty cycle correction factor of 0.19 dBm was used in the calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6905MHz) – 3x996T+484T(NON-CONTIGUOUS)
STANDARD POWER

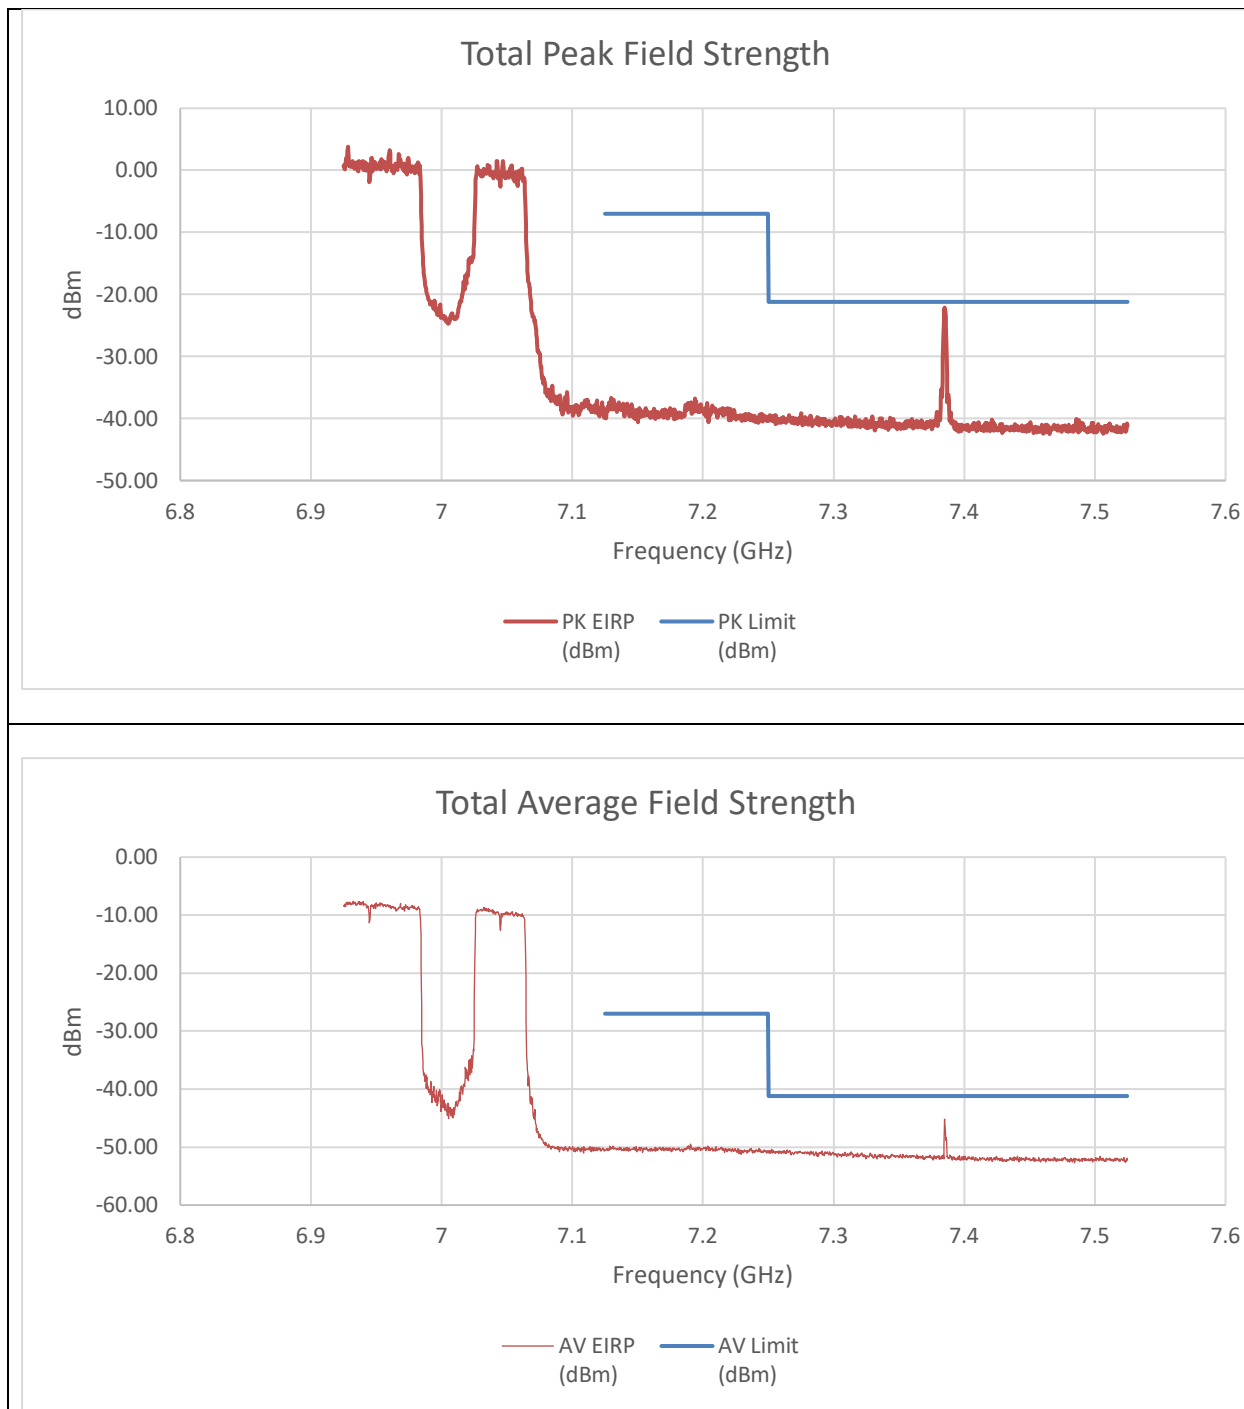


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-54.88	-53.63	-39.99	-7.00	-32.99
7.3849	-41.45	-34.08	-22.14	-21.2	-0.94
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-64.88	-64.99	-50.52	-27.00	-23.52
7.3849	-65.98	-57.09	-45.16	-41.2	-3.96

An array gain of 11.21 dBi and a duty cycle correction factor of 0.19 dBm was used in the calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6905MHz) – 484T+3x996T(NON-CONTIGUOUS)
STANDARD POWER

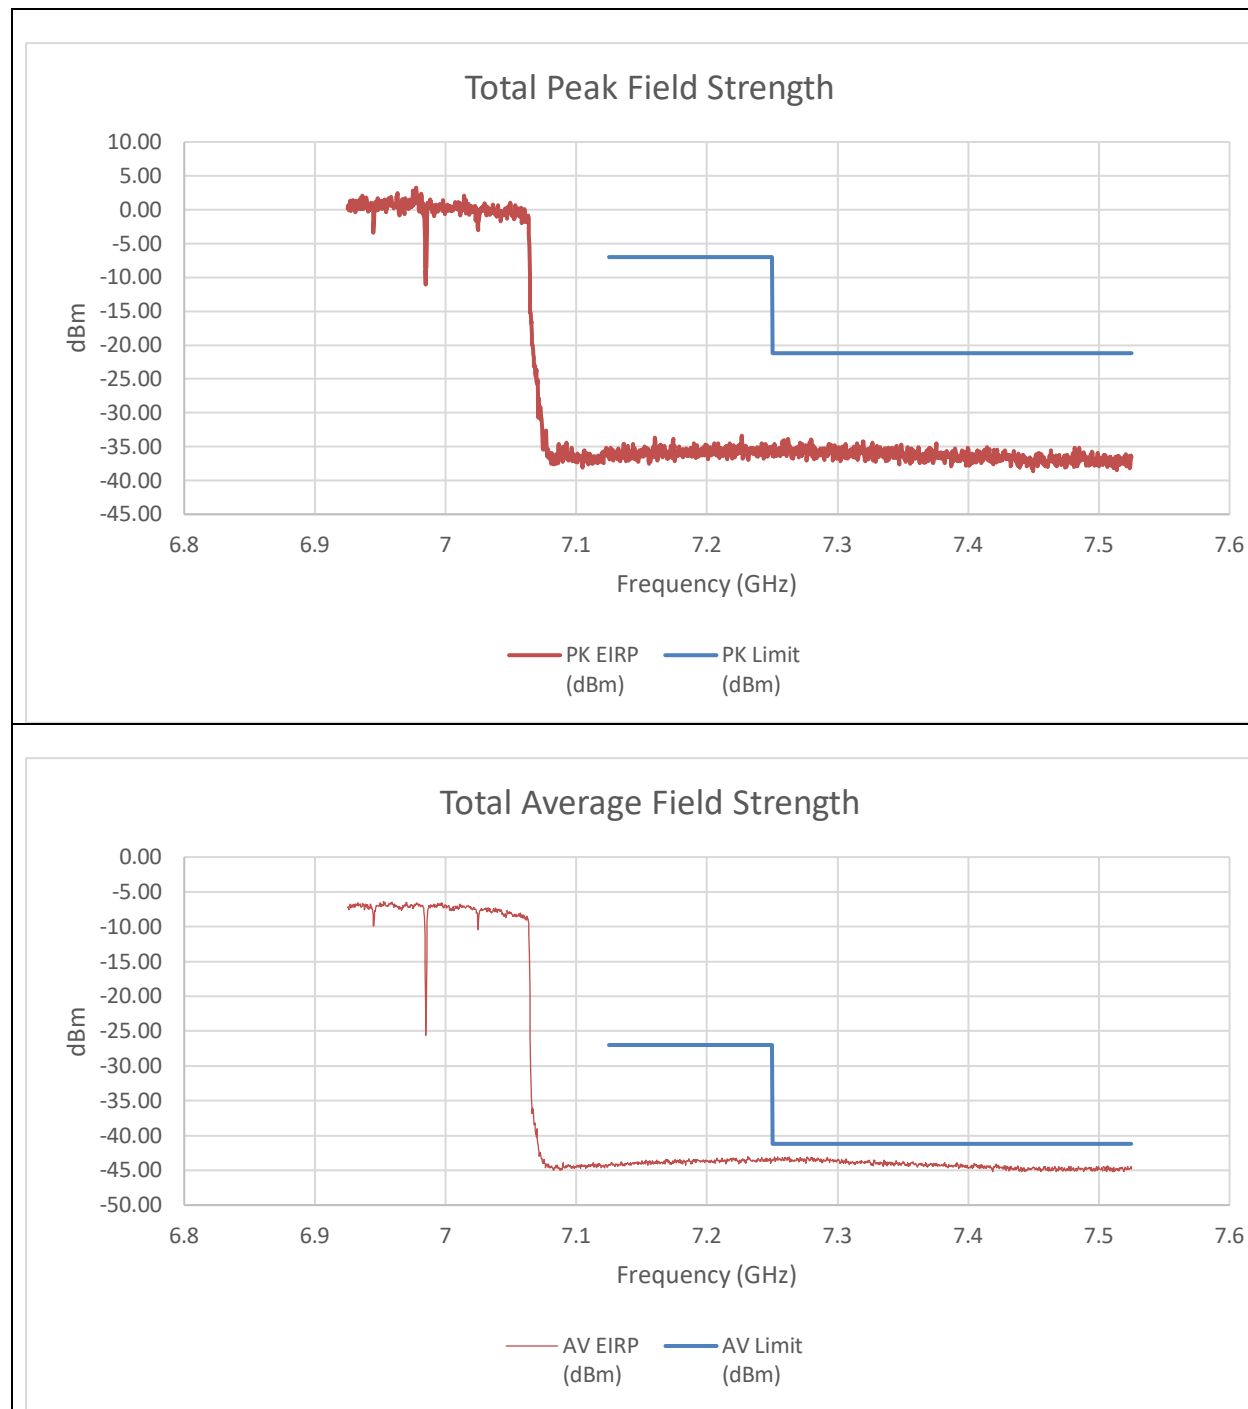


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-51.95	-50.45	-36.92	-7.00	-29.92
7.25	-50.35	-50.50	-36.20	-21.20	-15.00
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-58.67	-58.57	-44.21	-27.00	-17.21
7.25	-57.82	-58.05	-43.52	-41.20	-2.32

An array gain of 11.21 dBi and a duty cycle correction factor of 0.19 dBm was used in the calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6905MHz) – 996T+484T+2x996T(NON-CONTIGUOUS)
STANDARD POWER

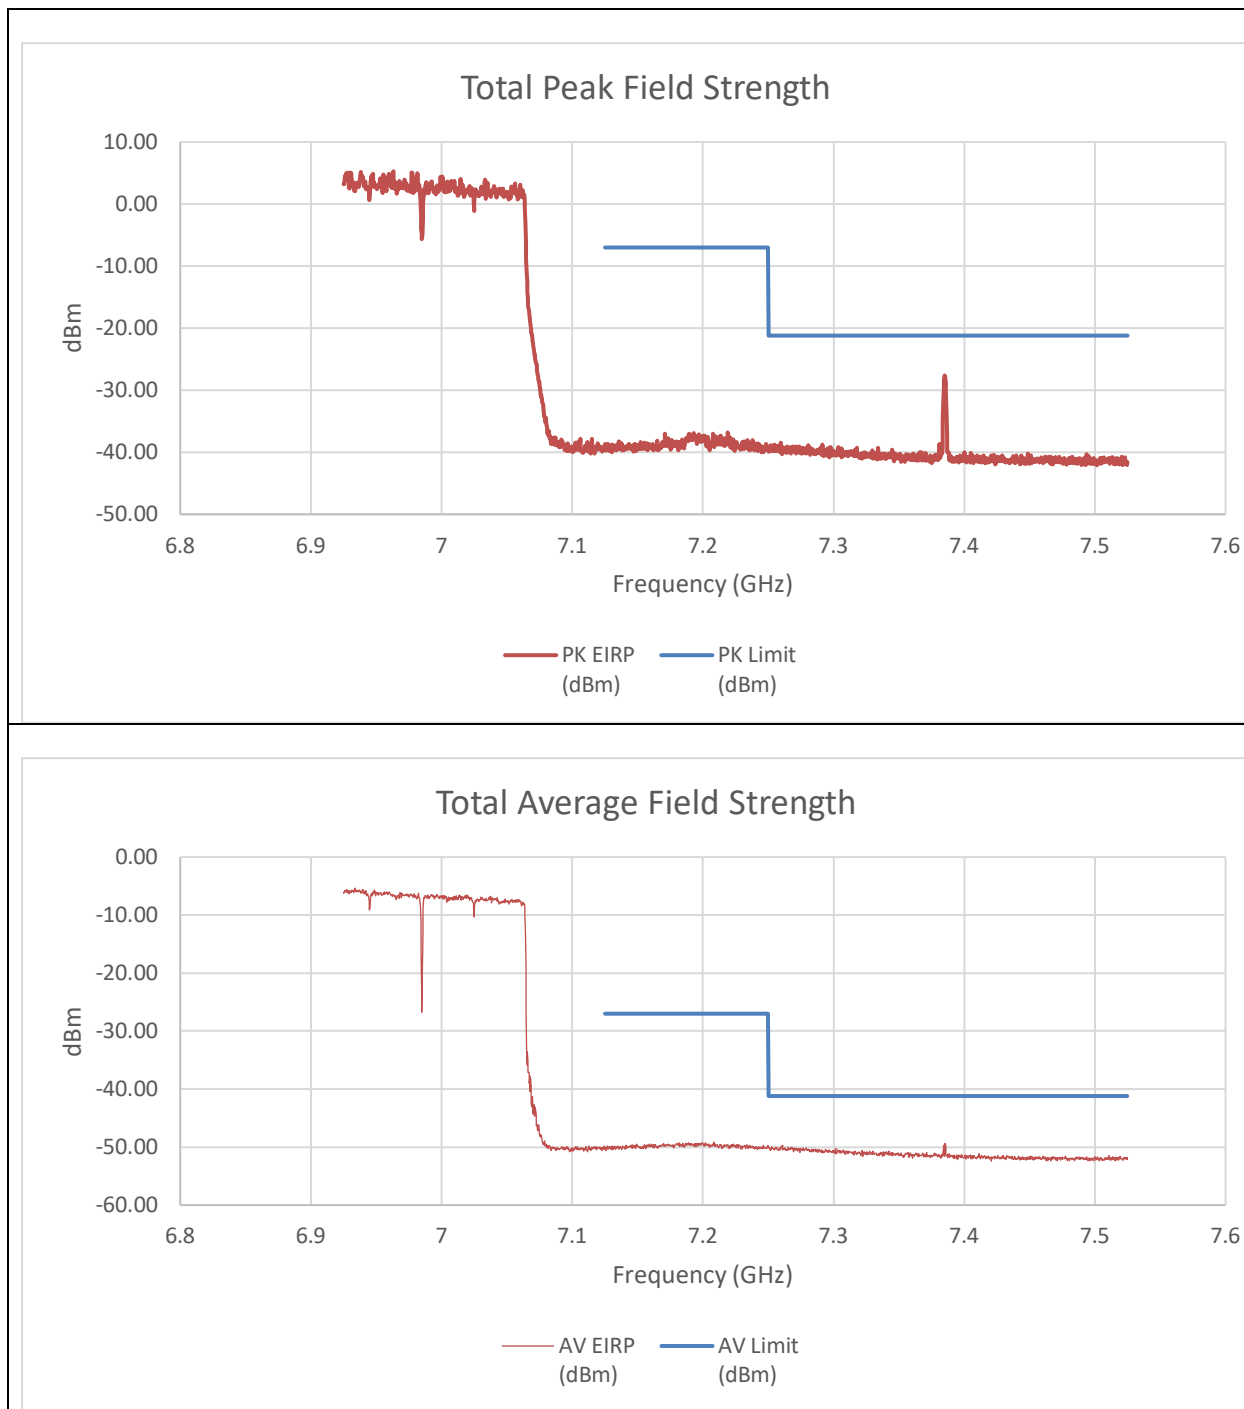


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-53.96	-53.82	-39.67	-7.00	-32.67
7.3852	-39.19	-49.76	-27.61	-21.2	-6.41
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-64.74	-65.34	-50.62	-27.00	-23.62
7.25	-64.49	-64.88	-50.27	-41.20	-9.07

An array gain of 11.21 dBi and a duty cycle correction factor of 0.19 dBm was used in the calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6905MHz) – 996T+484T+2x996T(NON-CONTIGUOUS)
2) STANDARD POWER

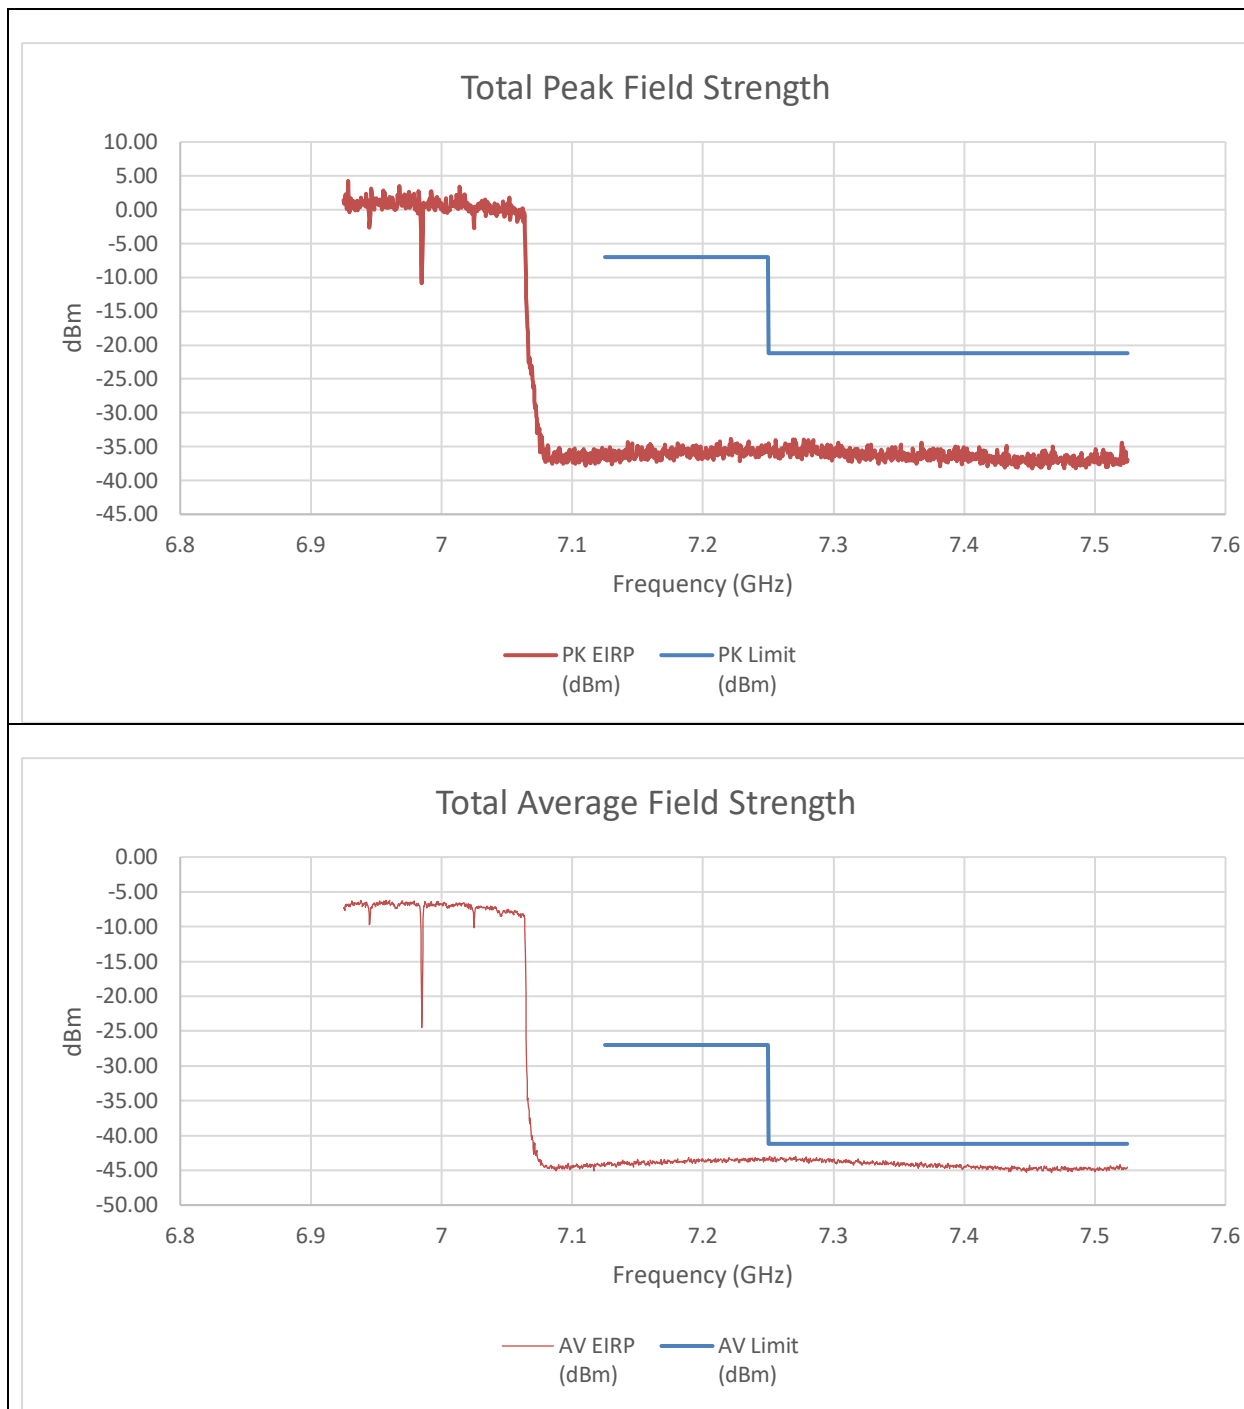


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-50.73	-49.90	-36.07	-7.00	-29.07
7.25	-48.49	-50.63	-35.21	-21.20	-14.01
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-58.52	-58.55	-44.12	-27.00	-17.12
7.25	-57.37	-57.67	-43.11	-41.20	-1.91

An array gain of 11.21 dBi and a duty cycle correction factor of 0.19 dBm was used in the calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6905MHz) – 2x996T+484T+996T(NON-CONTIGUOUS)
STANDARD POWER

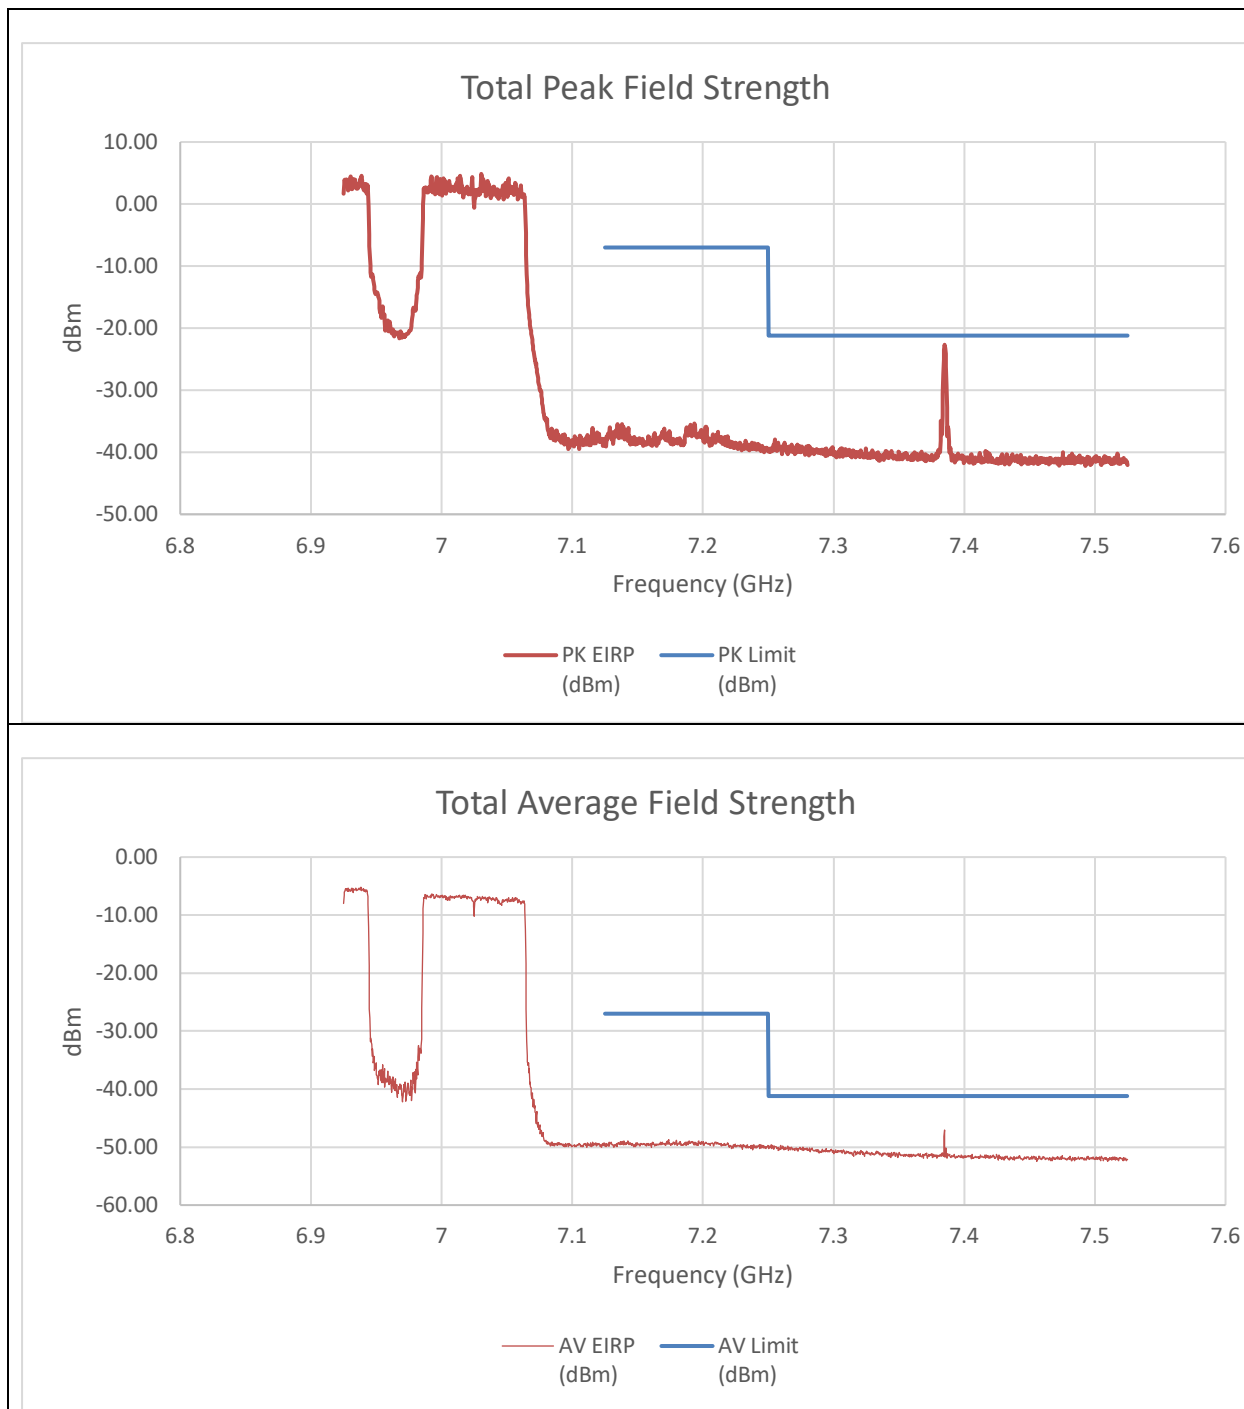


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-53.88	-52.81	-39.09	-7.00	-32.09
7.3852	-36.43	-37.41	-22.67	-21.2	-1.47
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-64.19	-63.44	-49.39	-27.00	-22.39
7.25	-63.83	-64.75	-49.86	-41.20	-8.66

An array gain of 11.21 dBi and a duty cycle correction factor of 0.19 dBm was used in the calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6905MHz) – 2x996T+484T+996T(NON-CONTIGUOUS)
2) STANDARD POWER

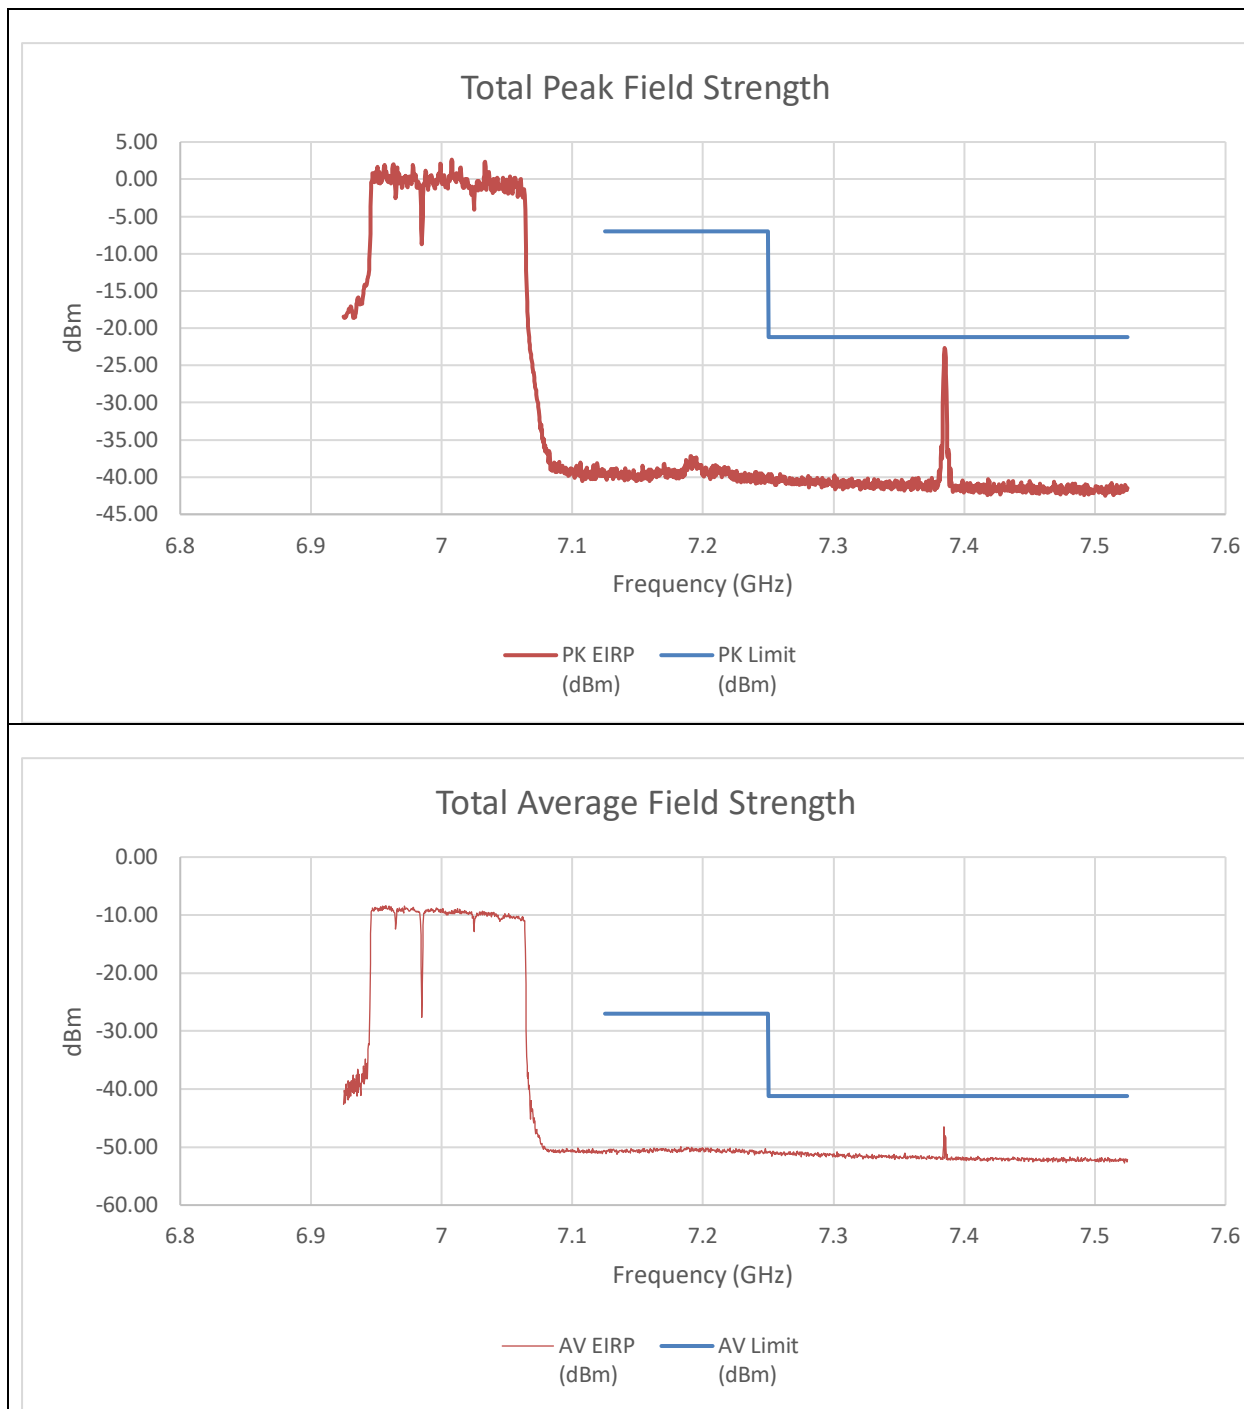


Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-54.15	-53.61	-39.65	-7.00	-32.65
7.3852	-36.56	-37.16	-22.63	-21.2	-1.43
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-65.08	-66.13	-51.16	-27.00	-24.16
7.25	-64.81	-65.90	-50.91	-41.20	-9.71

An array gain of 11.21 dBi and a duty cycle correction factor of 0.19 dBm was used in the calculation of the summed data.

HIGH CHANNEL RESTRICTED BAND EDGE (6905MHz) – 4x996T STANDARD POWER

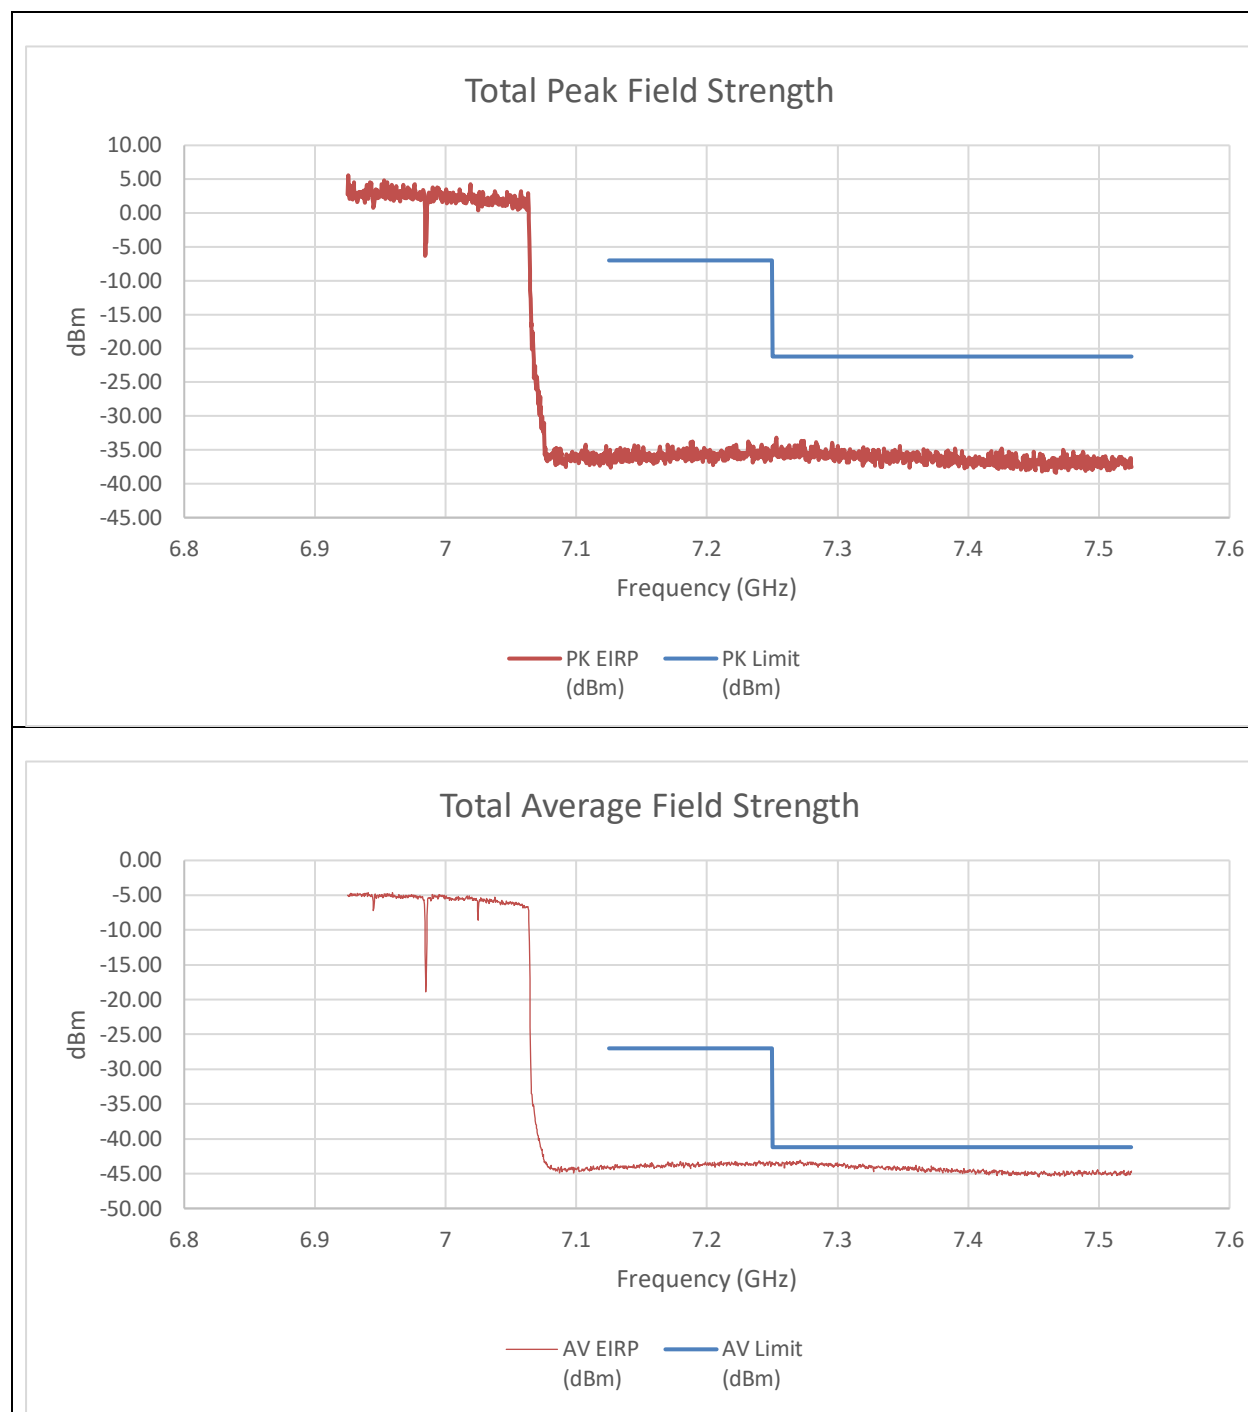

Summed Pk and Av Data

Frequency (GHz)	PK Reading C1 (dBm)	PK Reading C2 (dBm)	PK EIRP (dBm)	PK Limit (dBm)	Margin (dB)
7.126	-50.99	-48.62	-35.42	-7.00	-28.42
7.25	-47.89	-49.96	-34.58	-21.20	-13.38
Frequency (GHz)	AV Reading C1 (dBm)	AV Reading C2 (dBm)	AV EIRP (dBm)	AV Limit (dBm)	Margin (dB)
7.126	-58.80	-57.88	-44.10	-27.00	-17.10
7.25	-57.66	-58.10	-43.65	-41.20	-2.45

An array gain of 11.21 dBi was used in the calculation of the summed data.