

APPENDIX A: VERIFICATION PLOTS

ELEMENT

DUT: Dipole 2450.000 MHz; Type: D2450V2 - SN797

Communication System: UID: 0, CW; Frequency: 2450.000 MHz

Medium: Head Simulating Liquid; Medium parameters used:

$f = 2450.000$ MHz; $\text{cond} = 1.74$ S/m; $\text{perm} = 40.9$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 02/26/2025; Ambient Temp: 21.1°C; Tissue Temp: 20.2°C

Probe: EX3DV4 - SN7803; ConvF:(7.06,7.22,7.34); 2024-06-28

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1583; 2024-07-08

Phantom: Twin-SAM V8.0; Serial: 2065

Measurement SW: DASY Module SAR V16.4.0.5005

2450.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 10.5 W/kg

SAR(1 g) = 5.36 W/kg

Deviation (1 g) = 3.08%

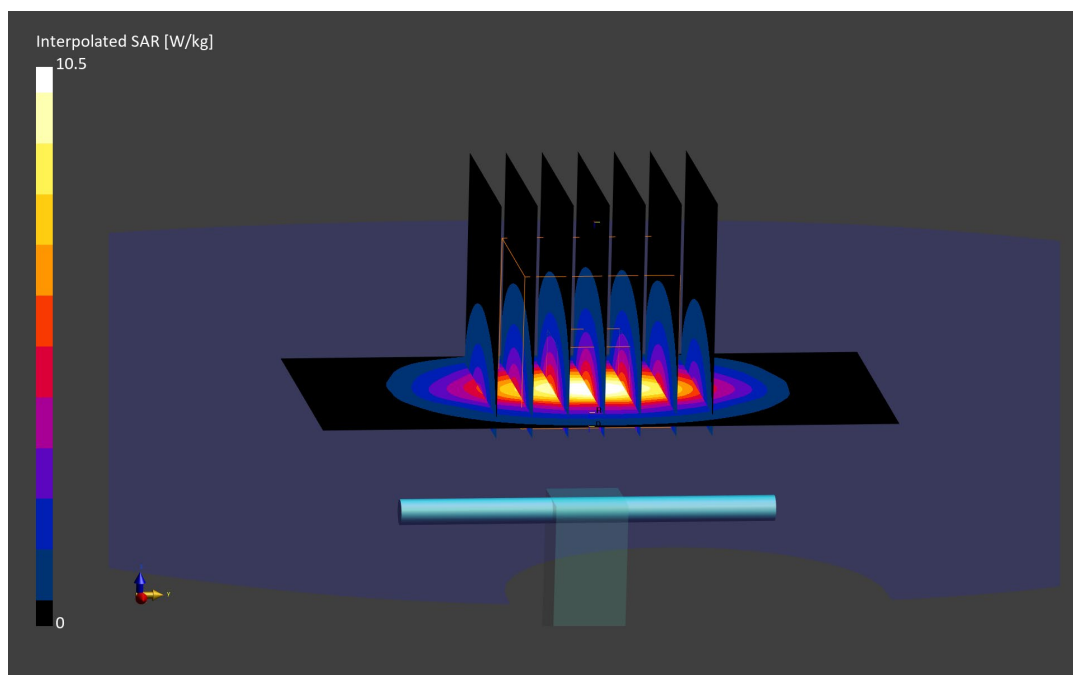

ELEMENT

DUT: Dipole 5850.000 MHz; Type: D5GHzV2 - SN1057

Communication System: UID: 0, CW; Frequency: 5850.000 MHz

Medium: Head Simulating Liquid; Medium parameters used:

f = 5850.000 MHz; cond = 5.21 S/m; perm = 36.3; density = 1000 kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 02/28/2025; Ambient Temp: 23.2°C; Tissue Temp: 23.2°C

Probe: EX3DV4 - SN7803; ConvF:(4.78,4.89,4.97); 2024-06-28

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1583; 2024-07-08

Phantom: Twin-SAM V8.0; Serial: 2065

Measurement SW: DASY Module SAR V16.4.0.5005

5850.0 MHz System Verification at 17.0 dBm (50 mW)

Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (32.0 x 32.0 x 22.9): Measurement grid: dx=4.0 mm, dy=4.0 mm, dz=1.4 mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 18.2 W/kg

SAR(1 g) = 4.13 W/kg

Deviation (1 g) = 1.35%

