

MEASUREMENT REPORT

FCC PART 15.407 802.11a/n/ac/ax/be (OFDM/OFDMA)

Applicant Name:

Microsoft Corporation
1 Microsoft Way
Redmond, WA 98052-8300
United States

Date of Testing:

4/1/2025 - 6/16/2025

Test Report Issue Date:

6/23/2025

Test Site/Location:

Element Lab., Columbia, MD, USA

Test Report Serial No.:

1M2504010035-10.C3K

FCC ID:**C3K00002102A****APPLICANT:****Microsoft Corporation****Application Type:**

Class II Permissive Change, Module Host Integration

EUT Type:

Limited Modular Approval - Host Integration (Portable Computing Device)

Frequency Range:

5180 – 5885MHz

Modulation Type:

OFDM, OFDMA

FCC Equipment Class:

Unlicensed National Information Infrastructure TX (NII)

FCC Rule Part(s):

Part 15 Subpart E (15.407)

Test Procedure(s):

ANSI C63.10:2020

Permissive Change(s):

Please see change document

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10:2020. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



RJ Ortanez
Executive Vice President



FCC ID: C3K00002102A	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)	Page 1 of 48

T A B L E O F C O N T E N T S

1.0	INTRODUCTION	3
1.1	Scope	3
1.2	Element Test Location	3
1.3	Test Facility / Accreditations	3
2.0	PRODUCT INFORMATION	4
2.1	Equipment Description	4
2.2	Device Capabilities	4
2.3	Antenna Description	7
2.4	Test Configuration	8
2.5	Software and Firmware	8
2.6	EMI Suppression Device(s) / Modifications	8
3.0	DESCRIPTION OF TESTS	9
3.1	Evaluation Procedure	9
3.2	AC Line Conducted Emissions	9
3.3	Radiated Emissions	10
3.4	Environmental Conditions	10
4.0	ANTENNA REQUIREMENTS	11
5.0	MEASUREMENT UNCERTAINTY	12
6.0	TEST EQUIPMENT CALIBRATION DATA	13
7.0	TEST RESULTS	15
7.1	Summary	15
7.2	Emission Measurements	16
7.2.1	MIMO Radiated Spurious Emission Measurements	21
7.2.2	MIMO Band Edge Measurements (20MHz BW)	31
7.2.3	MIMO Band Edge Measurements (40MHz BW)	37
7.2.4	MIMO Band Edge Measurements (80MHz BW)	39
7.2.5	MIMO Band Edge Measurements (160MHz BW)	40
7.3	Line-Conducted Test Data	41
8.0	CONCLUSION	48

FCC ID: C3K00002102A	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M02504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)	Page 2 of 48



1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Test Location

Measurements were conducted at the Element laboratory(ies) indicated in Section 1.3 below. All measurement facilities are compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element lab located in Columbia, MD 21046, U.S.A.

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (2451B) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

FCC ID: C3K00002102A	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M02504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)	Page 3 of 48

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Microsoft Portable Computing Device containing module FCC ID: C3K00002102A**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter.

The equipment under test (EUT), Model 2119, integrates two previously certified modules. The first module is a WLAN/Bluetooth module authorized under FCC ID: C3K00002102A, and the second is a cellular module authorized under FCC ID: C3K2119. No hardware or software modifications have been made to either module as part of this host integration. The evaluation in this report demonstrates compliance of the host device with the applicable FCC rules, considering the co-location and simultaneous transmission of the integrated modules.

Test Device Serial No.: 0F3496C25123T8, 0F3493C25123T8

2.2 Device Capabilities

This device contains the following capabilities:

Bluetooth (1x, EDR, LE), 802.11b/g/n/ac/ax/be WLAN, 802.11a/n/ac/ax/be UNII (5GHz and GHz), Multi-band LTE, Multi-Band NR (FR1)

Band 1		Band 2A		Band 2C		Band 3		Band 3/4	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
36	5180	52	5260	100	5500	149	5745	169	5845
:	:	:	:	:	:	:	:	:	:
40	5200	56	5280	120	5600	157	5785	173	5865
:	:	:	:	:	:	:	:	:	:
48	5240	64	5320	144	5720	165	5825	177	5885

Table 2-1. 802.11ax/be (20MHz) Frequency / Channel Operations

Band 1		Band 2A		Band 2C		Band 3		Band 3/4	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
38	5190	54	5270	102	5510	151	5755	167	5835
:	:	:	:	:	:	:	:	:	:
46	5230	62	5310	118	5590	159	5795	175	5875
				142	5710				

Table 2-2. 802.11ax/be (40MHz BW) Frequency / Channel Operations

FCC ID: C3K00002102A	MEASUREMENT REPORT (Class II Permissive Change)			Approved by: Technical Manager
Test Report S/N: 1M02504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)		Page 4 of 48

Band 1		Band 2A		Band 2C		Band 3		Band 3/4	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
42	5210	58	5290	106	5530	155	5775	167	5835
				:	:				
				122	5610				
				:	:				
				138	5690				

Table 2-3. 802.11ax/be (80MHz BW) Frequency / Channel Operations

Band 1/2A		Band 2C		Band 3/4	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
50	5250	114	5570	163	5815

Table 2-4. 802.11ax/be (160MHz BW) Frequency / Channel Operations

FCC ID: C3K00002102A	MEASUREMENT REPORT (Class II Permissive Change)			Approved by: Technical Manager
Test Report S/N: 1M02504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)		Page 5 of 48

Notes:

- 5GHz NII operation is possible in 20MHz, 40MHz, 80MHz, and 160MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2b) of ANSI C63.10:2020. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

802.11 Mode/Band		MIMO (1+2)
		Duty Cycle [%]
5GHz	a	99.52
	n (HT20)	99.63
	ac (VHT20)	99.53
	ax (HE20)	99.63
	be (EHT20)	99.74
	n (HT40)	99.60
	ac (VHT40)	99.52
	ax (HE40)	99.48
	be (EHT40)	99.63
	ac (VHT80)	99.34
	ax (HE80)	99.63
	be (EHT80)	99.85
	ac (HT160)	99.79
	ax (HE160)	99.52
	be (EHT160)	99.66

Table 2-5. Measured Duty Cycles

- The device employs MIMO technology. Below are the possible configurations.

WiFi Configurations	SISO		SDM		CDD	
	ANT1	ANT2	ANT1	ANT2	ANT1	ANT2
5GHz	11a	✓	✓	✗	✗	✓
	11n	✓	✓	✓	✓	✓
	11ac	✓	✓	✓	✓	✓
	11ax	✓	✓	✓	✓	✓
	11be	✓	✓	✓	✓	✓

Table 2-6. Antenna / Technology Configuration

✓ = Support ; ✗ = NOT Support

SISO = Single Input Single Output

SDM = Spatial Diversity Multiplexing – MIMO function

CDD = Cyclic Delay Diversity – 2Tx Function

FCC ID: C3K00002102A	MEASUREMENT REPORT (Class II Permissive Change)			Approved by: Technical Manager
Test Report S/N: 1M02504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)		Page 6 of 48

3. The device supports the following data rates (shown in Mbps):

802.11a	MCS Index				Spatial Stream	OFDM (802.11n/802.11ac)				OFDM (802.11ac)				OFDM (802.11ax/be)																	
						20MHz		40MHz		80MHz		160MHz		20MHz		40MHz		80MHz		160MHz											
	0.8μs GI	0.4μs GI	0.8μs GI	0.4μs GI		0.8μs GI	1.6μs GI	0.8μs GI	1.6μs GI	0.8μs GI	1.6μs GI	0.8μs GI	1.6μs GI	0.8μs GI	1.6μs GI	3.2μs GI	0.8μs GI	1.6μs GI	3.2μs GI	0.8μs GI	1.6μs GI	3.2μs GI									
20MHz	HT	VHT	HE	EHT		6	0	0	0	1	6.5	7.2	13.5	15	29.3	32.5	58.5	65	8.6	8.1	7.3	17.2	16.3	14.6	36	34	30.6	72.1	68.1	61.3	
						9	1	1	1	1	13	14.4	27	30	58.5	65	117	130	17.2	16.3	14.6	34.4	32.5	29.3	72.1	68.1	61.3	144.1	136.1	122.5	
						12	2	2	2	1	19.5	21.7	40.5	45	87.8	97.5	175.5	195	25.8	24.4	21.9	51.6	48.8	43.9	108.1	102.1	91.9	216.2	204.2	183.8	
						18	3	3	3	1	26	28.9	54	60	117	130	234	260	34.4	32.5	29.3	68.8	65	58.5	144.1	136.1	122.5	288.2	272.2	245	
						24	4	4	4	4	1	39	43.3	81	90	175.5	195	351	390	51.6	48.8	43.9	103.2	97.5	87.8	216.2	204.2	183.8	432.4	408.3	367.5
						36	5	5	5	5	1	52	57.8	108	120	234	260	468	520	68.8	65	58.5	137.6	130	117	288.2	272.2	245	576.5	544.4	490
						48	6	6	6	6	1	58.5	65	121.5	135	263.3	292.5	526.5	585	77.4	73.1	65.8	154.9	146.3	131.6	324.3	306.3	275.6	648.5	612.5	551.3
						54	7	7	7	1	65	72.2	135	150	292.5	325	585	650	86	81.3	73.1	172.1	162.5	146.3	360.3	340.3	306.3	720.6	680.6	612.5	
						8	8	8	8	1	78	86.7	162	180	351	390	702	780	103.2	97.5	87.8	206.5	195	175.5	432.4	408.3	367.5	864.7	816.7	735	
						9	9	9	9	1	N/A	N/A	180	200	390	433.3	780	866.7	114.7	108.3	97.5	229.4	216.7	195	480.4	453.7	408.3	907.4	816.7		
						10	10	1										129	121.9	109.7	258.1	243.8	219.4	540.4	510.4	459.4	1080.9	1020.4	918.8		
						11	11	1										143.4	135.4	121.9	286.8	270.8	243.8	600.5	567.1	510.4	1201	1134.3	1020.8		
						12	1											154.9	146.3	131.6	309.7	292.5	263.3	648.5	612.5	551.3	1297.1	1225	1102.5		
						13	1											172.1	162.5	146.3	344.1	325	292.5	720.6	680.6	612.5	1441.2	1361.1	122.5		
						6	8	0	0	0	2	13	14.4	27	30	58.5	65	117	130	17.2	16.3	14.6	34.4	32.5	29.3	72.1	68.1	61.3	144.1	136.1	122.5
						9	9	1	1	1	2	26	28.9	54	60	117	130	234	260	34.4	32.5	29.3	68.8	65	58.5	144.1	136.1	122.5			
						12	10	2	2	2	2	39	43.3	81	90	175.5	195	351	390	51.6	48.8	43.9	103.2	97.5	87.8	216.2	204.2	183.8	432.4	408.3	367.5
						18	11	3	3	3	2	52	57.8	108	120	234	260	468	520	68.8	65	58.5	137.6	130	117	288.2	272.2	245	576.5	544.4	490
						24	12	4	4	4	2	78	86.7	162	180	351	390	702	780	103.2	97.5	87.8	206.5	195	175.5	432.4	408.3	367.5	864.7	816.7	735
						36	13	5	5	5	2	104	115.6	216	240	468	520	936	1040	137.6	130	117	275.3	260	234	576.5	544.4	490	1152.9	1088.9	980
						48	14	6	6	6	2	117	130	243	270	526.5	585	1053	1170	154.9	146.3	131.6	309.7	292.5	263.3	648.5	612.5	551.3	1297.1	1225	1102.5
						54	15	7	7	7	2	130	144.4	270	300	585	650	1170	1300	172.1	162.5	146.3	344.1	325	292.5	720.6	680.6	612.5	1441.2	1361.1	122.5
						8	8	8	8	2	156	173.3	324	360	702	780	1404	1560	206.5	195	175.5	412.9	390	351	864.7	816.7	735	1729.4	1633.3	1470	
						9	9	9	9	2	N/A	N/A	360	400	780	866.7	1560	1733.3	229.4	216.7	195	458.8	433.3	390	960.8	907.4	816.7	1921.6	1814.8	1633.3	
						10	10	2									258.1	243.8	219.4	516.2	487.5	438.8	1080.9	1020.8	918.8	2161.8	2041.7	1837.5			
						11	11	2									286.8	270.8	243.8	573.5	541.7	487.5	1201	1134.3	1020.8	2402	2268.5	2041.7			
						12	2										309.7	292.5	263.3	619.4	585	526.5	1297.1	1225	1102.5	2594.1	2450	2205			
						13	2										344.1	325	292.5	688.2	650	585	1441.2	1361.1	1225	2882.4	2722.2	2450			

Table 2-7. Supported Data Rates

✓ = Support; ✗ = NOT Support

2.3 Antenna Description

The following antenna gains were used for the testing.

Frequency [GHz]	Measured Directional Gain (dBi)
5.20	7.56
5.30	7.42
5.50	8.05
5.80	8.05
5.85	7.53

Table 2-8. Antenna Peak Gain

The directional antenna gains were measured per the guidance of KDB 662911 D03. The measurement report is uploaded as part of this filing.

FCC ID: C3K00002102A	MEASUREMENT REPORT (Class II Permissive Change)			Approved by: Technical Manager
Test Report S/N: 1M02504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)	Page 7 of 48	



2.4 Test Configuration

ANSI C63.10:2020 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups and 7.2 for radiated emissions test setups.

2.5 Software and Firmware

The test was conducted with software/firmware version 3.1.0.1407 installed on the EUT.

2.6 EMI Suppression Device(s) / Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: C3K00002102A	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M02504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)	Page 8 of 48

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10:2020) was used in the measurement of the EUT.

Deviation from measurement procedure **None**

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50µH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW 2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.3. The EMI Receiver mode of the Agilent MXE was used to perform AC line conducted emissions testing.

FCC ID: C3K00002102A	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M02504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)	Page 9 of 48

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: C3K00002102A	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M02504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)	Page 10 of 48

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

MEASUREMENT REPORT (Class II Permissive Change)			Approved by: Technical Manager
Test Report S/N: 1M02504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)	Page 11 of 48

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10:2020. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.13
Line Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

Table 5-1. Measurement Uncertainty Budget – MD

FCC ID: C3K00002102A	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M02504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)	Page 12 of 48



6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	WL25-1	Conducted Cable Set (25GHz)	2/25/2025	Annual	2/25/2026	WL25-1
-	WL25-2	Conducted Cable Set (25GHz)	2/25/2025	Annual	2/25/2026	WL25-2
-	WL40-1	Conducted Cable Set (40GHz)	2/25/2025	Annual	2/25/2026	WL40-1
-	MD 1M 18-40	EMCCable and Switch System	2/25/2025	Annual	2/25/2026	MD 1M 18-40
-	AP2-001	EMCCable and Switch System	2/25/2025	Annual	2/25/2026	AP2-001
-	ETS-001	EMCCable and Switch System	2/25/2025	Annual	2/25/2026	ETS-001
Agilent	N9038A	MXE EMI Receiver	9/16/2024	Annual	9/16/2025	MY51210133
Agilent	N9020A	MXA Signal Analyzer	5/7/2025	Annual	5/7/2026	US46470561
Agilent	N9030A	PXA Signal Analyzer (44GHz)	10/16/2024	Annual	10/16/2025	MY49430494
Anritsu	MA24408A	Microwave Peak Power Sensor	10/2/2024	Annual	10/2/2025	11675
EMCO	3115	Horn Antenna (1-18GHz)	9/6/2024	Biennial	9/6/2025	9704-5182
EMCO	3116	Horn Antenna (18-40GHz)	7/5/2023	Biennial	7/5/2025	9203-2178
ETS-Lindgren	3116C	Horn Antenna (18-40GHz)	4/22/2025	Biennial	4/22/2027	218893
Keysight Technologies	N9020A	MXA Signal Analyzer	2/7/2025	Annual	2/7/2026	MY53421544
Keysight Technologies	N9030A	PXA Signal Analyzer	8/26/2024	Annual	8/26/2025	MY54490576
Keysight Technologies	N9030B	PXA Signal Analyzer	9/19/2024	Annual	9/19/2025	MY57141001
Pasternack	NMLC-2	Line Conduted Emissions Cable	3/25/2025	Annual	3/25/2026	NMLC-2
Rohde & Schwarz	TC-TA18	Vivaldi Antenna	4/15/2024	Biennial	4/15/2026	101058
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	10/16/2024	Annual	10/16/2025	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	11/25/2024	Annual	11/25/2025	100348
Rohde & Schwarz	ESW44	EMI Test Receiver (44GHz)	3/25/2025	Annual	3/25/2026	101716
Rohde & Schwarz	CMX500	5G Radio Communication Tester		N/A		101202
Sunol	JB6	Bi-Log Antenna (20M-6GHz)	3/24/2025	Biennial	3/25/2027	A082816
Sunol	JB5	Bi-Log Antenna (20M-5GHz)	9/11/2024	Biennial	9/11/2026	A051107

Table 6-1. Test Equipment Calibration Table – MD

Component	Serial Number
MegaPhase Cable TM26-S1S1-36	18160103 003
Pasternack 6dB Attenuator PE7005-6	N/A

Table 6-2. WL25-1 Conducted Cable Set Components

Component	Serial Number
MiniCircuits Cable CBL-2FT-SMSM+	77743
MCL 6dB Attenuator BW-S6W2+	1314

Table 6-3. WL25-2 Conducted Cable Set Components

Component	Serial Number
MegaPhase Cable TM40K1K1-36	18160102 001
MCL 10dB Attenuator BW-K10 2W44+	1902

Table 6-4. WL40-1 Conducted Cable Set Components

FCC ID: C3K00002102A	MEASUREMENT REPORT (Class II Permissive Change)			Approved by: Technical Manager
Test Report S/N: 1M02504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)		Page 13 of 48

Component	Serial Number
Pasternak Cable RG214/U	111815
Sucoflex Cable 106A	246420-001
Rohde & Schwarz SF Unit	102134

Table 6-5. ETS-001 EMC Cable and Switch System Components

Component	Serial Number
MiniCircuits Cable CBL-0.5M-SMNM+	47261
Micro-Coax Utiflex Cable UFB311A-Q-3346-50U50U MFR 64639	231978-001
Micro-Coax Utiflex Cable UFB311A-1-0629-50U50U MFR 64639	231986-002
MegaPhase Cable NC29-N1N1-324	19046401 001
MegaPhase Flex Cable 10511-1	15044701-006
Micro-Coax Utiflex Cable UFB311A-Q-3446-50U50U MFR 64639	231978-002
Micro-Coax Utiflex Cable UFB311A-1-0629-50U50U MFR 64639	231986-001
Micro-Coax Utiflex Cable UFB142A-0-0659-50U50U MFR 64639	232069-001
Rohde & Schwarz SF Unit	102138

Table 6-6. AP2-001 EMC Cable and Switch System Components

Component	Serial Number
MegaPhase Cable TM40-K1K1-30	20233002-004
UTIPLEX Cable	64639 232063-001
Rohde & Schwarz Pre-amp RS-PR1840 18G-40G	9037.7670.02

Table 6-7. MD 1M 18-40 EMC Cable and Switch System Components
Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: C3K00002102A	MEASUREMENT REPORT (Class II Permissive Change)			Approved by: Technical Manager
Test Report S/N: 1M02504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)		Page 14 of 48

7.0 TEST RESULTS

7.1 Summary

Company Name: Microsoft Corporation
 FCC ID: C3K00002102A
 FCC Classification: Unlicensed National Information Infrastructure (NII)

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
N/A	26dB Bandwidth	N/A	CONDUCTED	PASS	See Original Filing for Module
15.407(e)	6dB Bandwidth	>500kHz(5725-5850MHz and 5850 – 5895MHz)		PASS	See Original Filing for Module
15.407 (a)(1)(iv), (a)(2), (a)(3)	Maximum Conducted Output Power	Maximum conducted powers must meet the limits detailed in 15.407 (a) (RSS-247 [6.2])		PASS	See Original Filing for Module
15.407 (a)(1)(iv), (a)(2), (a)(3)	Maximum Power Spectral Density	Maximum power spectral density must meet the limits detailed in 15.407 (a) (RSS-247 [6.2])		PASS	See Original Filing for Module
15.407(h)	Dynamic Frequency Selection	See DFS Test Report		PASS	See DFS Report
15.407(b)(1), (b)(2), (b)(3), (b)(4)	Undesirable Emissions	Undesirable emissions must meet the limits detailed in 15.407(b) (RSS-247 [6.2])	RADIATED / CONDUCTED	PASS	Section 7.2
15.205, 15.407(b)(1), (b)(4), (b)(5), (b)(6)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9])		PASS	Section 7.2
15.407	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 (RSS-Gen [8.8]) limits	LINE CONDUCTED	PASS	Section 7.3

Table 7-1. Summary of Test Results

Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst-case emissions.
- 2) For band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element “Chamber Automation,” Version 1.5.0.
- 3) The test data for several test cases shown in the table above are leveraged from the data shown in the original test reports for the transmitter filed under FCC ID: C3K00002102.

FCC ID: C3K00002102A	MEASUREMENT REPORT (Class II Permissive Change)			Approved by: Technical Manager
Test Report S/N: 1M02504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)		Page 15 of 48

7.2 Emission Measurements

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10:2020, and at the appropriate frequencies. All channels, modes, and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst-case emissions are reported in this section.

For transmitters operating in the 5.15-5.25 GHz and 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

For transmitters operating in the 5.850 – 5.895 GHz band: all emissions at or above 5.895GHz shall not exceed an e.i.r.p. of -5dBm/MHz and shall decrease linearly up to an e.i.r.p. of -27dBm/MHz at or above 5.925GHz, and all emissions below 5.725 GHz shall not exceed an e.i.r.p. of -27dBm/MHz at 5.65 GHz increasing linearly to 10dBm/MHz at 5.7GHz and from 5.7GHz increasing linearly to a level of 15.6dB/MHz at 5.72GHz, and from 5.72GHz increasing linearly to a level of 27dBm/MHz at 5.725GHz.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in the table below per FCC §15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μ V/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400F (kHz)	300
0.490 – 1.705 MHz	24000F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-2. Radiated Limits

Test Procedures Used

ANSI C63.10:2020 – Sections 12.7.7.2, 12.7.6, 12.7.5 (Radiated Spurious Emissions)

ANSI C63.10:2020 – Section 12.7.4.4, 12.7.4.2 (Band Edge Measurements)

FCC ID: C3K00002102A	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M02504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)	Page 16 of 48

Test Settings – Above 1GHz

Average Field Strength Measurements (Method AD – Average Detection)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times$ span/RBW)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces.

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize.

Test Settings – Below 1GHz

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

FCC ID: C3K00002102A	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M02504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)	Page 17 of 48

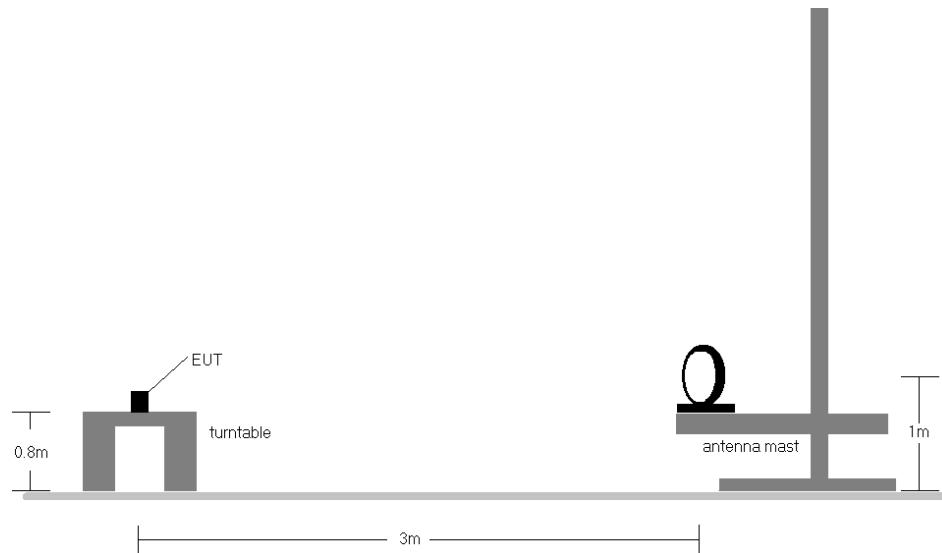


Figure 7-1. Radiated Test Setup < 30MHz

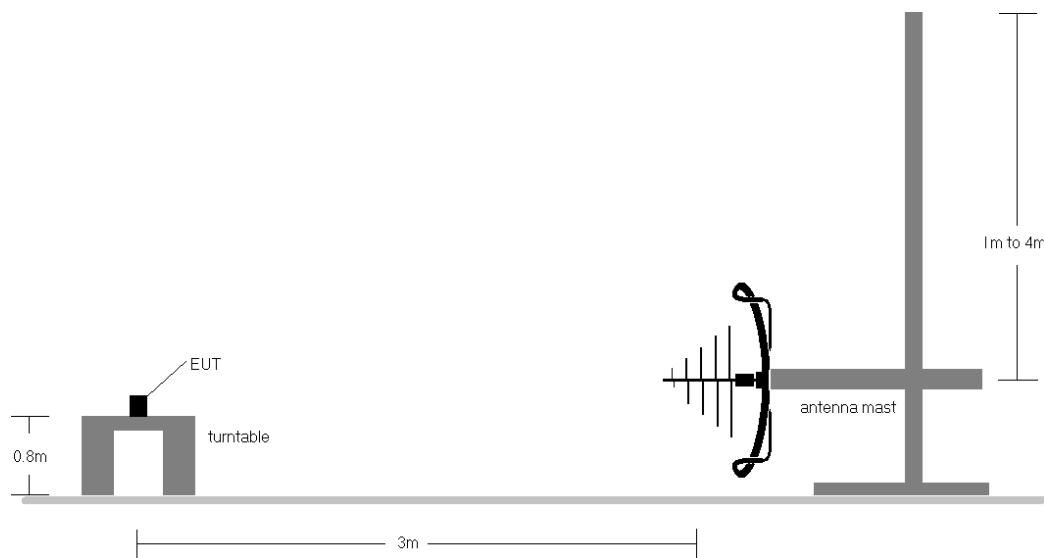


Figure 7-2. Radiated Test Setup < 1GHz

FCC ID: C3K00002102A	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M02504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)	Page 18 of 48

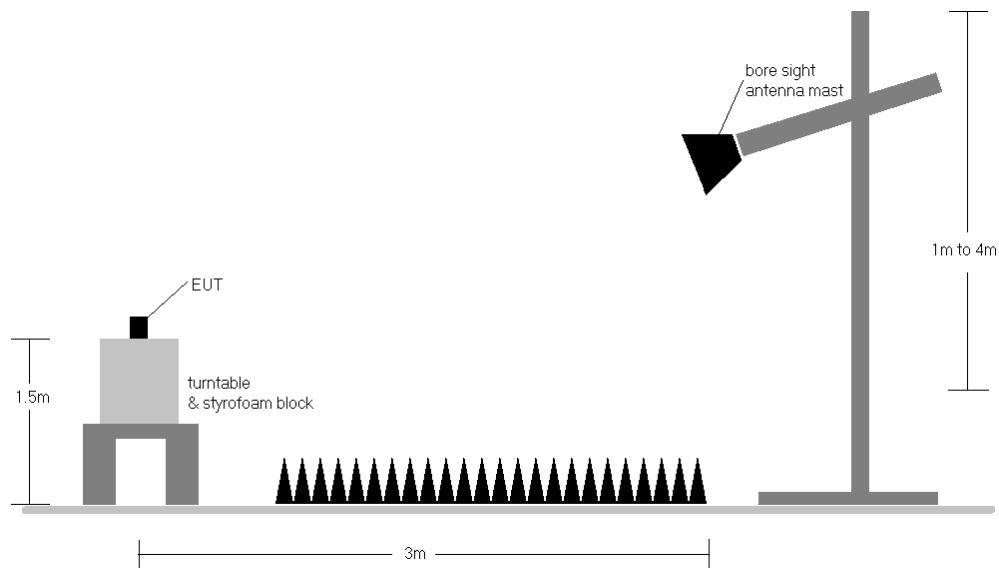


Figure 7-3. Radiated Test Setup > 1GHz



Figure 7-4. Conducted Test Setup for Band Edge > 1GHz

FCC ID: C3K00002102A	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M02504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)	Page 19 of 48

Test Notes

1. All spurious emissions lying in restricted bands specified in §15.205 are below the limits shown in §15.209. All spurious emissions that do not lie in a restricted band are subject to an average limit of -27dBm/MHz. At 3 meters, the field strength limit in $\text{dB}\mu\text{V}/\text{m}$ can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of $68.2\text{dB}\mu\text{V}/\text{m}$.
2. All spurious emissions that do not lie in a restricted band are subject to a peak limit not to exceed 20dB of the average limit [$68.2\text{dB}\mu\text{V}/\text{m}$]. If a peak measurement passes the average limit, it was determined no further investigation is necessary.
3. The antenna is manipulated through typical positions, polarity, and length during the tests. The EUT is manipulated through three orthogonal planes.
4. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported, however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions below 18GHz were measured at a 3-meter test distance while emissions above 18GHz were measured at a 1-meter test distance with the application of a distance correction factor.
6. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
7. The “-” shown in the following RSE tables are used to denote a noise floor measurement.
8. In the case where a peak-detector measurement passed the given RMS limit it was determined sufficient to demonstrate compliance.
9. The results recorded using the broadband antenna are known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
10. Restricted Band Edge testing was performed using conducted setup per ANSI C63.10:2020 Sec. 12.7.4.2.
11. Radiated Band Edge test cases were determined based on the original filing for the module, and by the manufacturer provided document Host Test Plan for Limited Module.

Sample Calculations

Determining Spurious Emissions Levels




- Field Strength Level [$\text{dB}\mu\text{V}/\text{m}$] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB]
- Margin [dB] = Field Strength Level [$\text{dB}\mu\text{V}/\text{m}$] – Limit [$\text{dB}\mu\text{V}/\text{m}$]

Conducted Band Edge Field Strength Conversion


- Field Strength Level [$\text{dB}\mu\text{V}/\text{m}$] = EIRP [dBm] + 95.2

FCC ID: C3K00002102A	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M02504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)	Page 20 of 48


7.2.1 MIMO Radiated Spurious Emission Measurements

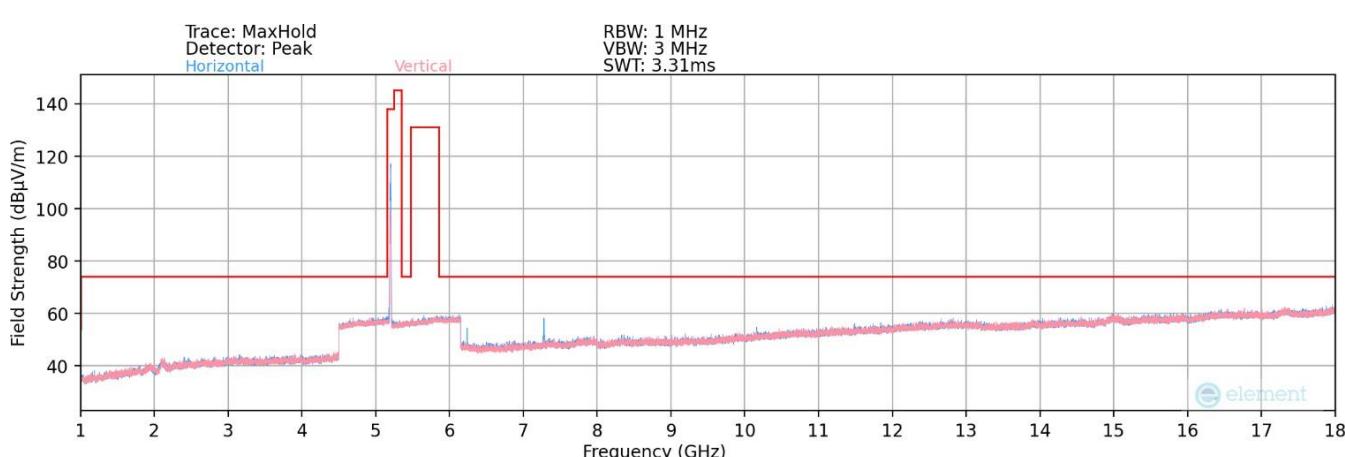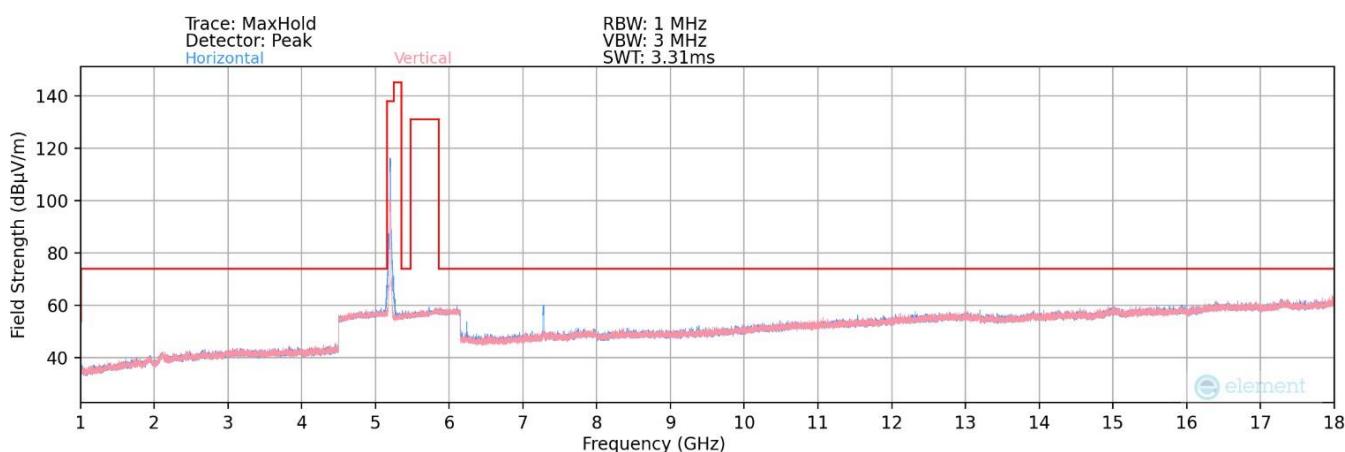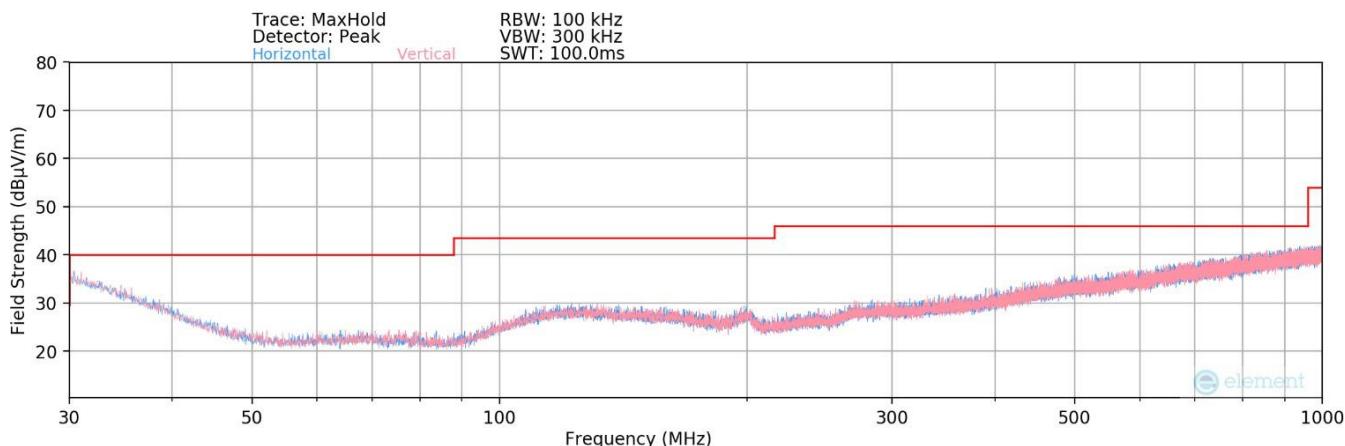


FCC ID: C3K00002102A	MEASUREMENT REPORT (Class II Permissive Change)			Approved by: Technical Manager
Test Report S/N: 1M02504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)		Page 21 of 48

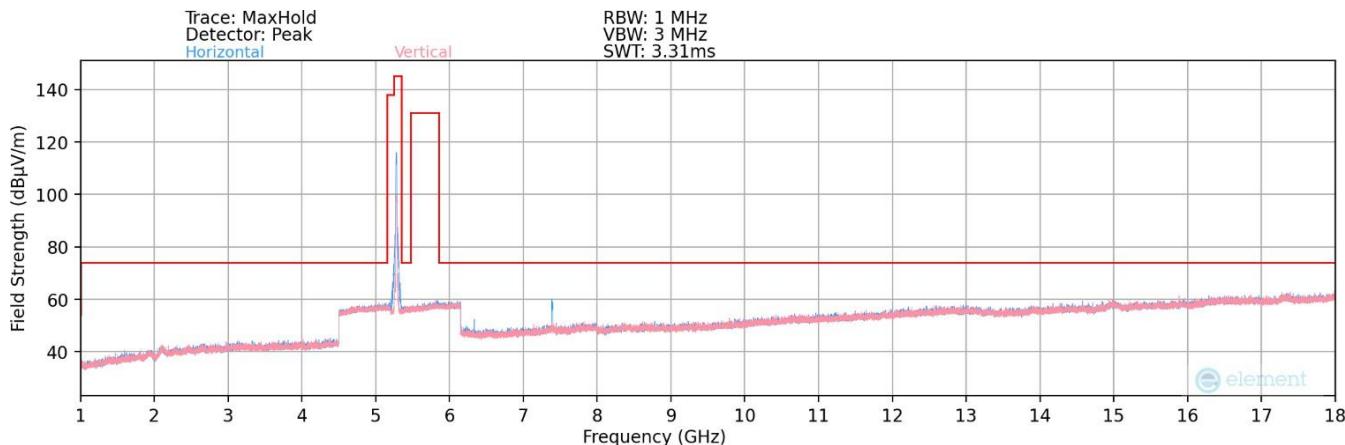

Plot 7-4. Radiated Spurious Plot above 1GHz MIMO (802.11n – UNII Band 2A Ch. 54)

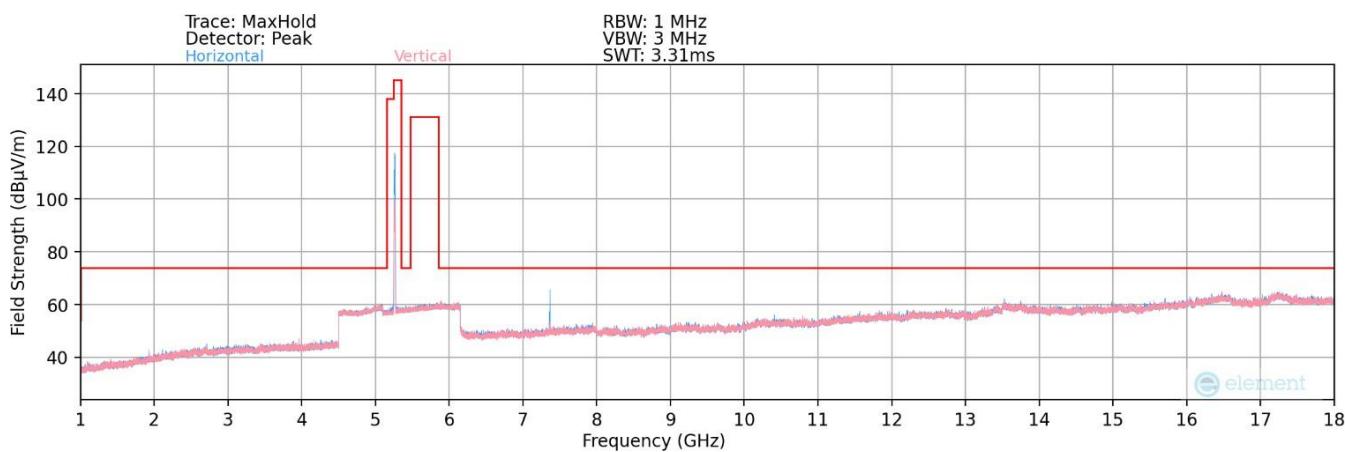


Plot 7-5. Radiated Spurious Plot above 1GHz MIMO (802.11be – UNII Band 2A Ch. 52 – 52T)

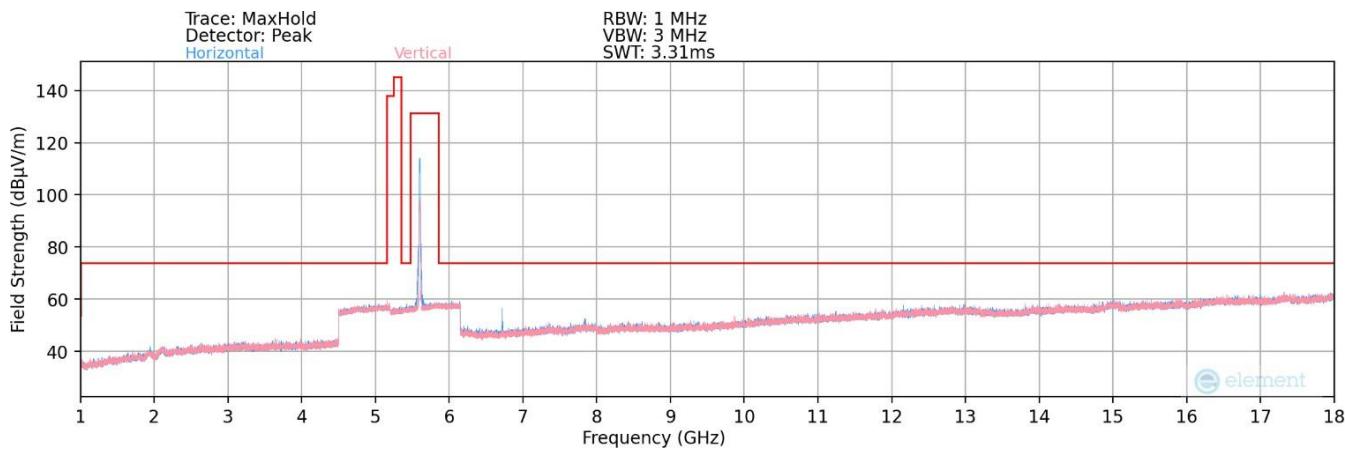


Plot 7-6. Radiated Spurious Plot above 1GHz MIMO (802.11n – UNII Band 2C Ch. 110)


FCC ID: C3K00002102A	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M02504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)	Page 22 of 48

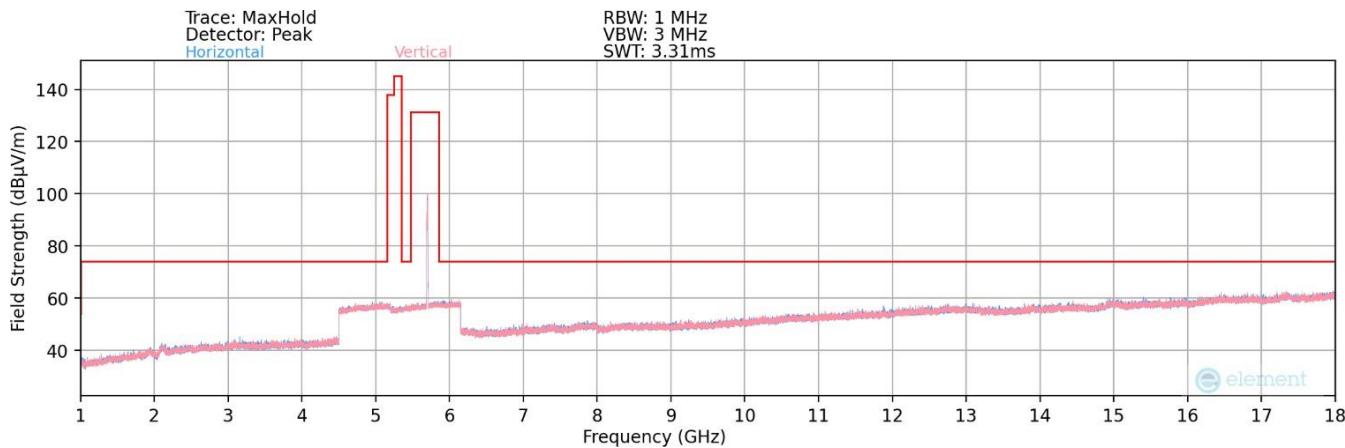

Plot 7-7. Radiated Spurious Plot above 1GHz MIMO (802.11be – UNII Band 2C Ch. 140)



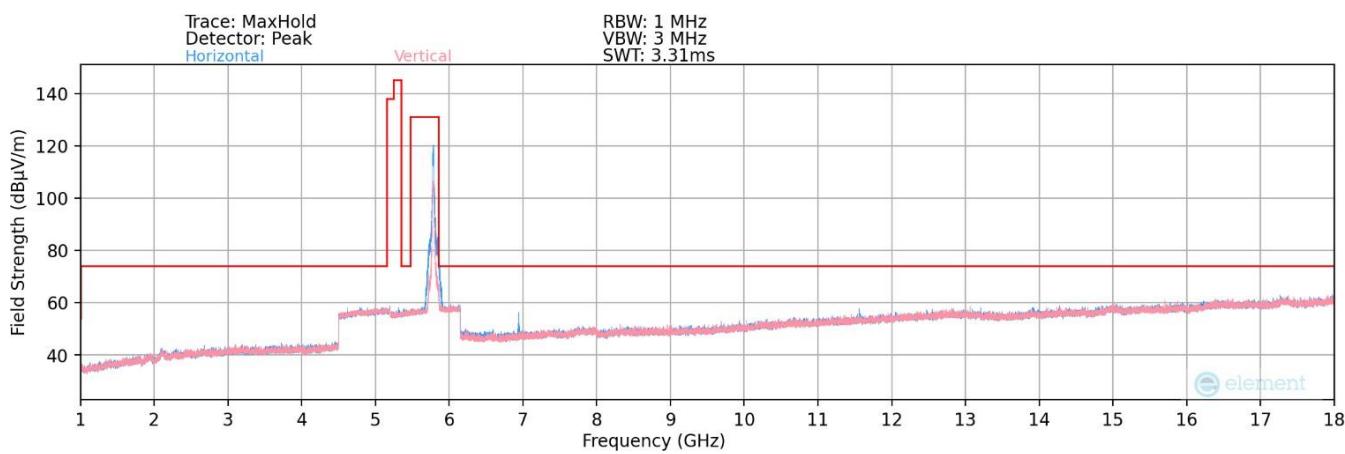


Plot 7-8. Radiated Spurious Plot above 1GHz MIMO (802.11n – UNII Band 3 Ch. 153)

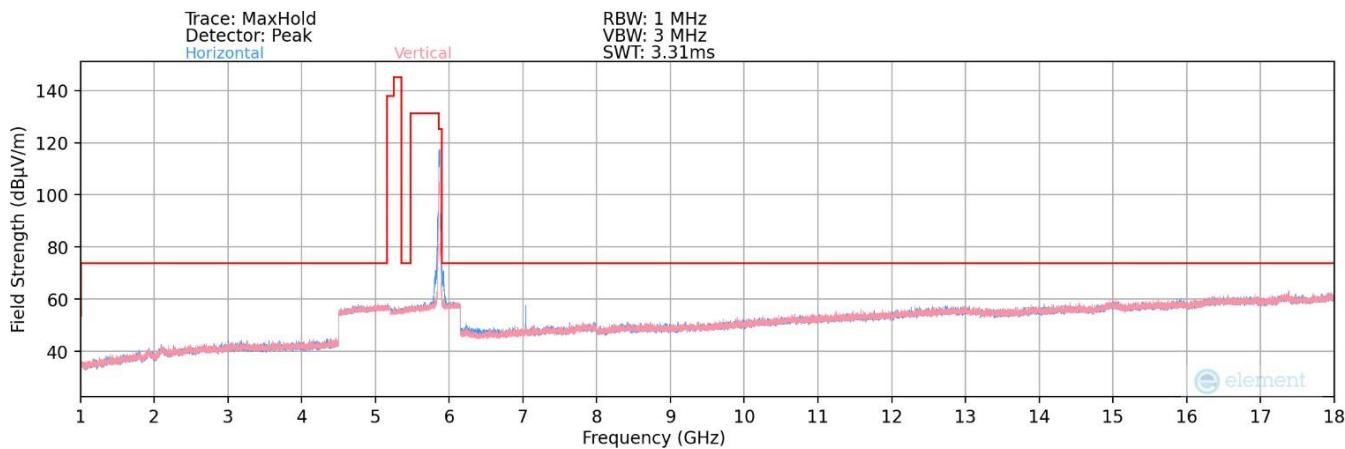

Plot 7-9. Radiated Spurious Plot above 1GHz MIMO (802.11n – UNII Band 4 Ch. 167)

FCC ID: C3K00002102A	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M02504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)	Page 23 of 48

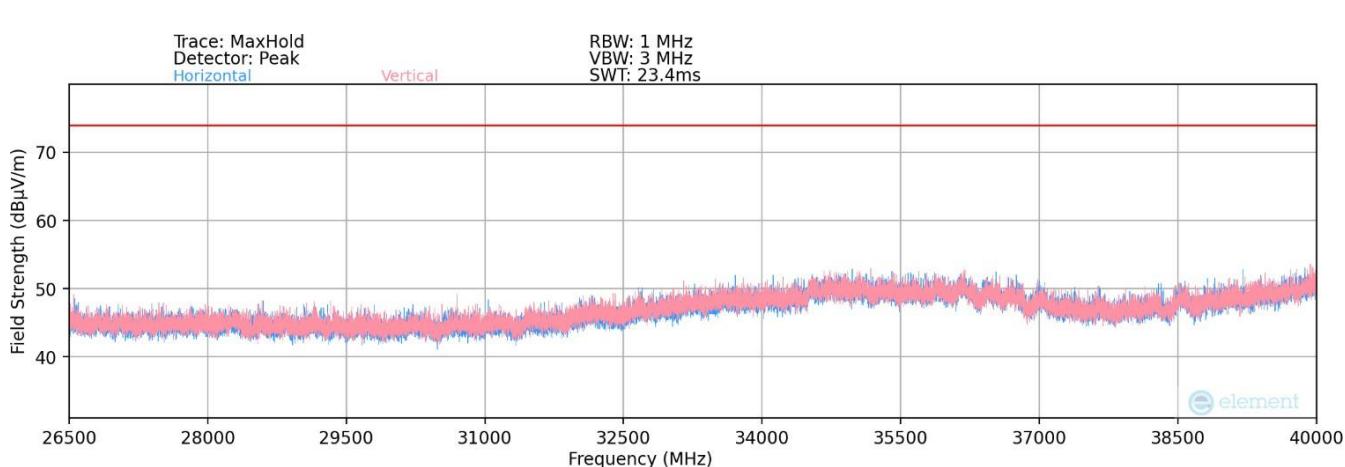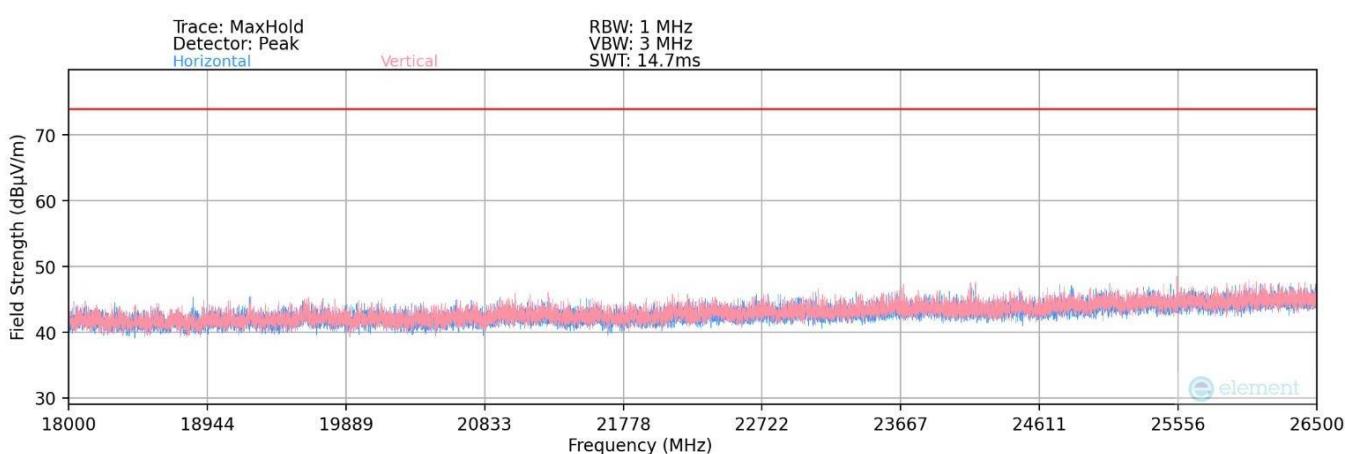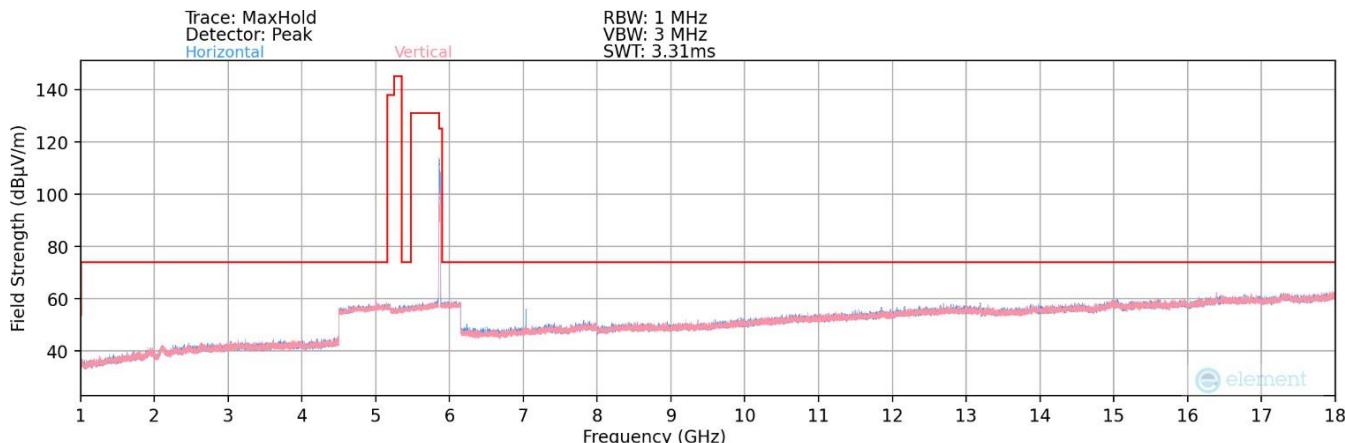

FCC ID: C3K00002102A	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M02504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)	Page 24 of 48



MIMO Radiated Spurious Emission Measurements – UNII Band 1

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS8
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5200MHz
 Channel: 40

Mode	Antenna	UNII Band	Channel	Test Channel Fred. [MHz]	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
802.11n	MIMO	I	40	5200	*	7279.00	Average	H	189	9	-70.12	12.80	0.00	49.68	53.98	-4.30
					*	7279.00	Peak	H	189	9	-59.42	12.80	0.00	60.38	73.98	-13.60
					*	10400.00	Peak	H	-	-	-69.57	16.34	0.00	53.77	68.20	-14.43
					*	15600.00	Average	H	-	-	-81.67	23.50	0.00	48.83	53.98	-5.15
					*	15600.00	Peak	H	-	-	-70.48	23.50	0.00	60.02	73.98	-13.96
					*	20800.00	Average	H	-	-	-62.76	2.52	-9.54	37.22	53.98	-16.76
					*	20800.00	Peak	H	-	-	-51.67	2.52	-9.54	48.31	73.98	-25.67
					*	26000.00	Peak	H	-	-	-51.23	4.78	-9.54	51.02	68.20	-17.18

Table 7-3. Radiated Measurements MIMO

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
200.00	Quasi-Peak	V	-	-	-71.05	-13.60	22.59	43.52	-20.93

Table 7-4. Radiated Measurements MIMO below 1GHz

FCC ID: C3K00002102A	MEASUREMENT REPORT (Class II Permissive Change)					Approved by: Technical Manager
Test Report S/N: 1M02504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)				Page 25 of 48



Worst Case Mode: 802.11be
Worst Case Transfer Rate: MCS0
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5200MHz
Channel: 40
RU Index: 37

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
802.11ax RU 52T	MIMO	I	40	5200	37	*	7279.00	Average	H	-	-	-69.95	12.80	0.00	49.85	53.98	-4.13
						*	7279.00	Peak	H	-	-	-59.96	12.80	0.00	59.84	73.98	-14.14
						*	10400.00	Peak	H	-	-	-70.48	16.34	0.00	52.86	68.20	-15.34
						*	15600.00	Average	H	-	-	-84.61	23.50	0.00	45.89	53.98	-8.09
						*	15600.00	Peak	H	-	-	-70.72	23.50	0.00	59.78	73.98	-14.20
						*	20800.00	Average	H	-	-	-64.76	2.52	-9.54	35.22	53.98	-18.76
						*	20800.00	Peak	H	-	-	-55.47	2.52	-9.54	44.51	73.98	-29.47
						*	26000.00	Peak	H	-	-	-53.16	4.78	-9.54	49.08	68.20	-19.12

Table 7-5. Radiated Measurements MIMO

FCC ID: C3K00002102A	MEASUREMENT REPORT (Class II Permissive Change)					Approved by: Technical Manager
Test Report S/N: 1M02504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)				Page 26 of 48



MIMO Radiated Spurious Emission Measurements – UNII Band 2A

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS8
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5270MHz
 Channel: 54

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
802.11n	MIMO	2A	54	5270	*	7378.00	Average	H	233	201	-77.78	15.94	0.00	45.16	53.98	-8.81
					*	7378.00	Peak	H	233	201	-67.94	15.94	0.00	55.00	73.98	-18.98
					*	10540.00	Peak	H	-	-	-72.53	20.17	0.00	54.64	68.20	-13.56
					*	15810.00	Average	H	-	-	-84.92	28.65	0.00	50.73	53.98	-3.25
					*	15810.00	Peak	H	-	-	-72.90	28.65	0.00	62.75	73.98	-11.23
					*	21080.00	Average	H	-	-	-62.89	2.88	-9.54	37.45	53.98	-16.53
					*	21080.00	Peak	H	-	-	-51.19	2.88	-9.54	49.15	73.98	-24.83
					*	26350.00	Peak	H	-	-	-51.39	4.91	-9.54	50.98	68.20	-17.22

Table 7-6. Radiated Measurements MIMO

Worst Case Mode: 802.11be
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5260MHz
 Channel: 52
 RU Index: 39

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
802.11be RU 52T	MIMO	2A	52	5260	39	*	7364.00	Average	H	253	22	-70.10	13.31	0.00	50.21	53.98	-3.77
						*	7364.00	Peak	H	253	22	-61.50	13.31	0.00	58.81	73.98	-15.17
						*	10520.00	Peak	H	271	31	-81.39	16.77	0.00	42.38	68.20	-25.82
						*	15780.00	Average	H	269	34	-82.04	23.77	0.00	48.73	53.98	-5.25
						*	15780.00	Peak	H	269	24	-71.09	23.77	0.00	59.68	73.98	-14.30

Table 7-7. Radiated Measurements MIMO

FCC ID: C3K00002102A	MEASUREMENT REPORT (Class II Permissive Change)								Approved by: Technical Manager
Test Report S/N: 1M02504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)						Page 27 of 48	



MIMO Radiated Spurious Emission Measurements – UNII Band 2C

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS8
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5550MHz
 Channel: 110

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
802.11n	MIMO	2C	110	5550		7772.00	Peak	H	-	-	-69.81	13.52	0.00	50.71	68.20	-17.49
					*	11100.00	Average	H	-	-	-81.58	17.77	0.00	43.19	53.98	-10.79
					*	11100.00	Peak	H	-	-	-70.88	17.77	0.00	53.89	73.98	-20.09
						16650.00	Peak	H	-	-	-71.37	25.42	0.00	61.06	68.20	-7.14
					*	22200.00	Average	H	-	-	-62.37	3.29	.954	38.38	53.98	-15.60
					*	22200.00	Peak	H	-	-	-56.15	3.29	.954	44.60	73.98	-29.38
						27750.00	Peak	H	-	-	-51.23	5.12	.954	51.35	68.20	-16.85

Table 7-8. Radiated Measurements MIMO

Worst Case Mode: 802.11be
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5700MHz
 Channel: 140
 RU Index: 37

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
802.11ax RU 52T	MIMO	2C	140	5700	37	*	7976.00	Average	H	309	192	-81.63	12.94	0.00	38.31	53.98	-15.67
							7976.00	Peak	H	309	192	-69.35	12.94	0.00	50.59	73.98	-23.39
							11400.00	Average	H	-	-	-81.77	18.27	0.00	43.50	53.98	-10.48
							11400.00	Peak	H	-	-	-70.33	18.27	0.00	54.94	73.98	-19.04
							17100.00	Peak	H	-	-	-71.84	26.12	0.00	61.28	68.20	-6.92
							22800.00	Average	H	-	-	-66.51	3.53	.954	34.48	53.98	-19.50
							22800.00	Peak	H	-	-	-56.84	3.53	.954	44.15	73.98	-29.83
							28500.00	Peak	H	-	-	-55.15	5.21	.954	47.52	68.20	-20.68

Table 7-9. Radiated Measurements MIMO

FCC ID: C3K00002102A	MEASUREMENT REPORT (Class II Permissive Change)								Approved by: Technical Manager
Test Report S/N: 1M02504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)						Page 28 of 48	



MIMO Radiated Spurious Emission Measurements – UNII Band 3

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS8
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5765MHz
 Channel: 153

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB _u V/m]	Limit [dB _u V/m]	Margin [dB]
802.11ac	MIMO	3	153	5765	*	6918.00	Average	H	397	185	-73.03	11.32	0.00	45.29	53.98	-8.69
					*	6918.00	Peak	H	397	185	-65.59	11.32	0.00	52.73	73.98	-21.25
					*	11530.00	Average	H	300	255	-79.92	18.53	0.00	45.61	53.98	-8.37
					*	11530.00	Peak	H	300	255	-70.85	18.53	0.00	54.68	73.98	-19.30
					*	17295.00	Peak	H	-	-	-73.00	26.79	0.00	60.79	68.20	-7.41
					*	23060.00	Average	H	-	-	-62.68	3.63	.954	38.41	53.98	-15.57
					*	23060.00	Peak	H	-	-	-51.04	3.63	.954	50.05	73.98	-23.93
					*	28825.00	Peak	H	-	-	-52.00	5.24	.954	50.71	68.20	-17.49

Table 7-10. Radiated Measurements MIMO

Worst Case Mode: 802.11ac
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5775MHz
 Channel: 155

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB _u V/m]	Limit [dB _u V/m]	Margin [dB]
802.11ac	MIMO	3	155	5775	*	11550.00	Average	H	-	-	-81.47	18.45	0.00	43.98	53.98	-10.00
					*	11550.00	Peak	H	-	-	-72.08	18.45	0.00	53.37	73.98	-20.61
					*	17325.00	Peak	H	-	-	-73.96	26.83	0.00	59.87	68.20	-8.33
					*	23100.00	Peak	H	-	-	-50.52	3.61	.954	50.55	68.20	-17.65
					*	28875.00	Peak	H	-	-	-52.60	5.17	.954	50.03	68.20	-18.17

Table 7-11. Radiated Measurements MIMO

FCC ID: C3K00002102A	MEASUREMENT REPORT (Class II Permissive Change)								Approved by: Technical Manager
Test Report S/N: 1M02504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)						Page 29 of 48	



MIMO Radiated Spurious Emission Measurements – UNII Band 4

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS8
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5835MHz
 Channel: 167

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
802.11n	MIMO	4	167	5835		7002.00	Average	H	153	13	-67.68	11.37	0.00	50.69	53.98	-3.29
						7002.00	Peak	H	153	13	-62.28	11.37	0.00	56.09	68.20	-12.11
					*	111670.00	Average	H	-	-	-81.62	18.52	0.00	43.90	53.98	-10.08
					*	111670.00	Peak	H	-	-	-70.82	18.52	0.00	54.70	73.98	-19.28
						17505.00	Peak	H	-	-	-71.33	26.57	0.00	62.24	68.20	-5.96
						23340.00	Peak	H	-	-	-51.01	3.76	.954	50.21	68.20	-17.99
						29175.00	Peak	H	-	-	-51.87	5.14	.954	50.74	68.20	-17.46

Table 7-12. Radiated Measurements MIMO

Worst Case Mode: 802.11be
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5865MHz
 Channel: 173
 RU Index: 37


Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
802.11ax RU 261	ANT1	4	173	5865	37		7038.00	Peak	H	-	-	-67.79	11.39	0.00	50.60	53.98	-3.38
							7038.00	Peak	H	-	-	-61.34	11.39	0.00	57.05	68.20	-11.15
						*	111730.00	Average	H	-	-	-81.53	18.40	0.00	43.87	53.98	-10.11
						*	111730.00	Peak	H	-	-	-71.49	18.40	0.00	53.91	73.98	-20.07
							17595.00	Peak	H	-	-	-72.47	26.78	0.00	61.31	68.20	-6.89
							23460.00	Peak	H	-	-	-56.54	3.86	.954	44.78	68.20	-23.42
							29325.00	Peak	H	-	-	-55.87	5.14	.954	46.73	68.20	-21.47

Table 7-13. Radiated Measurements MIMO


FCC ID: C3K00002102A	MEASUREMENT REPORT (Class II Permissive Change)								Approved by: Technical Manager
Test Report S/N: 1M02504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)						Page 30 of 48	

7.2.2 MIMO Band Edge Measurements (20MHz BW)

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5180MHz

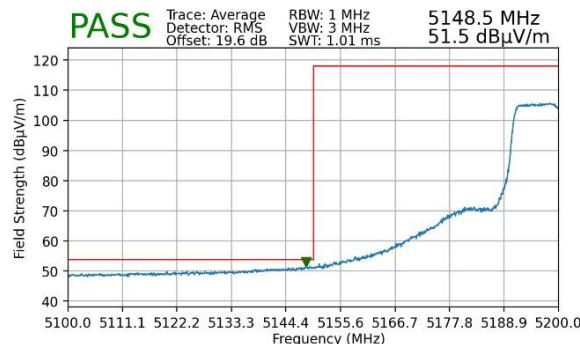


Plot 7-13. Lower Band Edge Plot MIMO (Average – UNII Band 1)

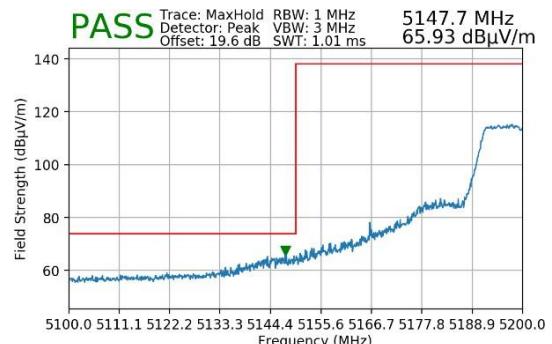


Plot 7-14. Lower Band Edge Plot MIMO (Peak – UNII Band 1)

Worst Case Mode: 802.11be
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5200MHz
 RU Index: 53

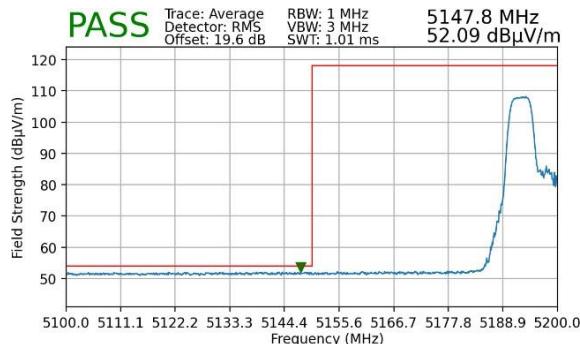


Plot 7-15. Lower Band Edge Plot MIMO (Average – UNII Band 1)

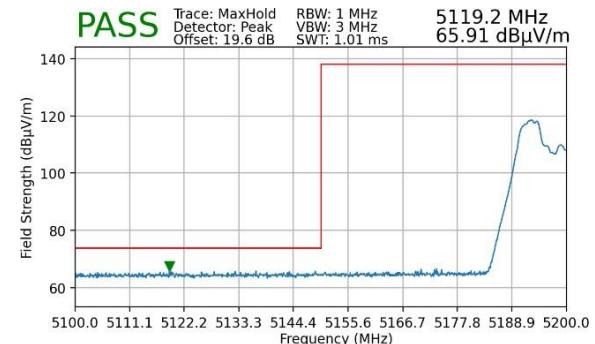


Plot 7-16. Lower Band Edge Plot MIMO (Peak – UNII Band 1)

FCC ID: C3K00002102A	MEASUREMENT REPORT (Class II Permissive Change)			Approved by: Technical Manager
Test Report S/N: 1M02504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)		Page 31 of 48

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS8
 Distance of Measurements: 3 Meters
 Operating Frequency: 5200MHz

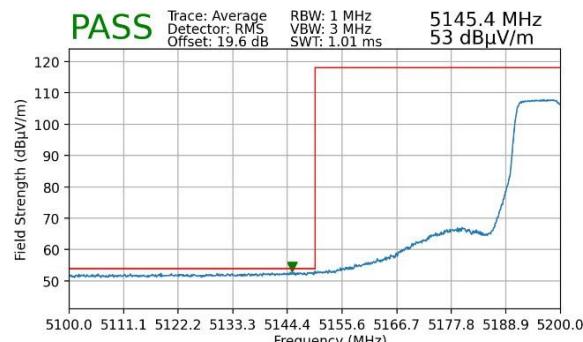


Plot 7-17. Lower Band Edge Plot MIMO (Average – UNII Band 1)

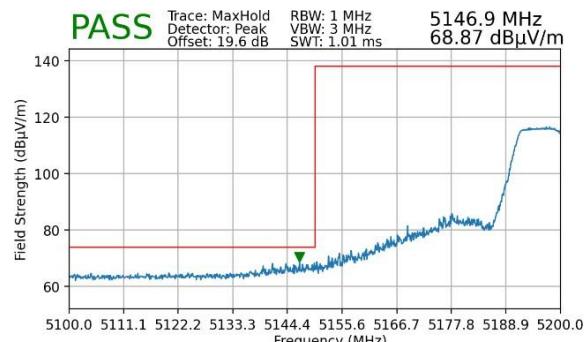


Plot 7-18. Lower Band Edge Plot MIMO (Peak – UNII Band 1)

Worst Case Mode: 802.11be
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5260MHz
 RU: 53

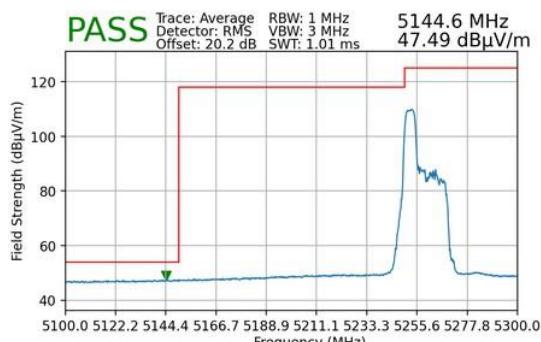


Plot 7-19. Lower Band Edge Plot MIMO (Average – UNII Band 2A)

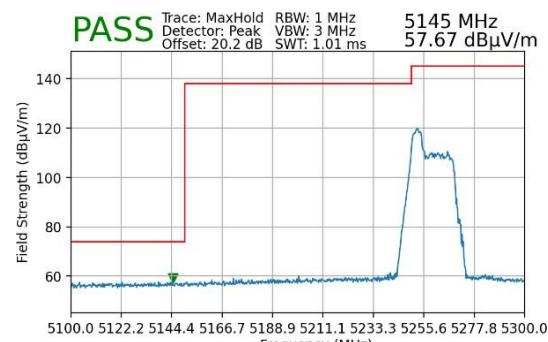


Plot 7-20. Lower Band Edge Plot MIMO (Peak – UNII Band 2A)

FCC ID: C3K00002102A	MEASUREMENT REPORT (Class II Permissive Change)			Approved by: Technical Manager
Test Report S/N: 1M02504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)		Page 32 of 48

Worst Case Mode: 802.11be
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5500MHz

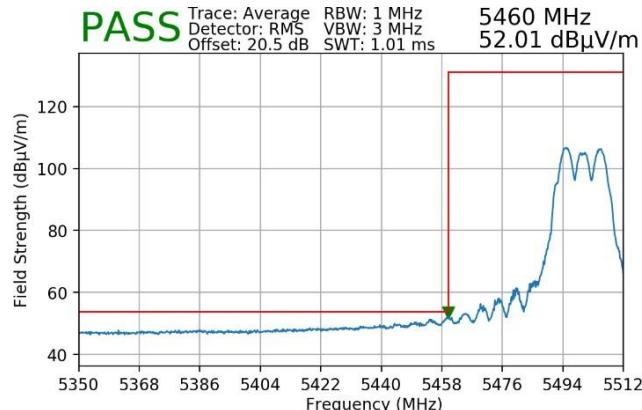


Plot 7-21. Lower Band Edge Plot MIMO (Average – UNII Band 2C)

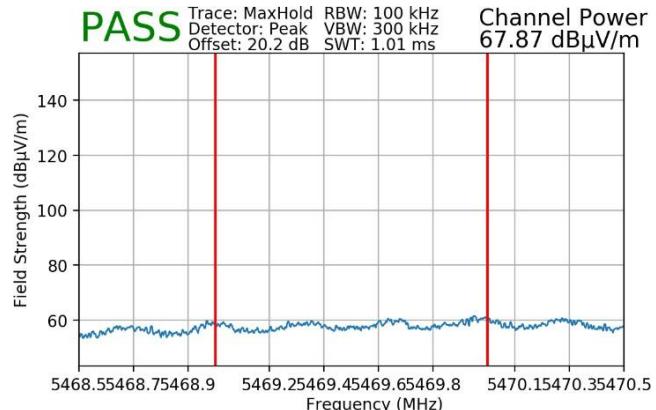

Plot 7-22. Lower Band Edge Plot MIMO (Peak – UNII Band 2C)


FCC ID: C3K00002102A	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M02504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)	Page 33 of 48

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS8
 Distance of Measurements: 3 Meters
 Operating Frequency: 5765MHz

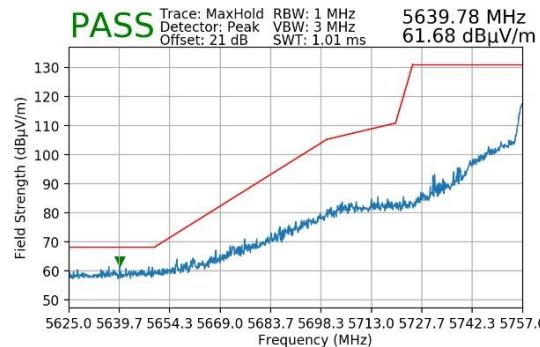

Plot 7-23. Low Band Edge Plot MIMO (Peak – UNII Band 3)


Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS8
 Distance of Measurements: 3 Meters
 Operating Frequency: 5765MHz

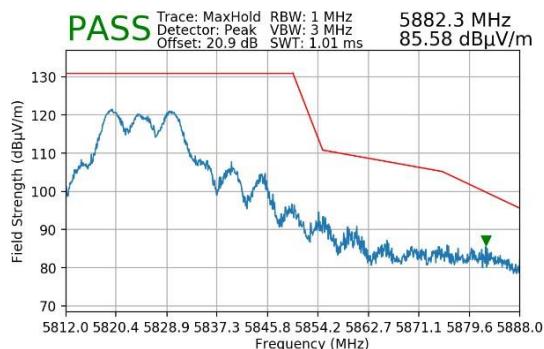

Plot 7-24. Upper Band Edge Plot MIMO (Peak – UNII Band 3)

FCC ID: C3K00002102A	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M02504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)	Page 34 of 48


Worst Case Mode: 802.11be
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5865MHz
 RU: 53

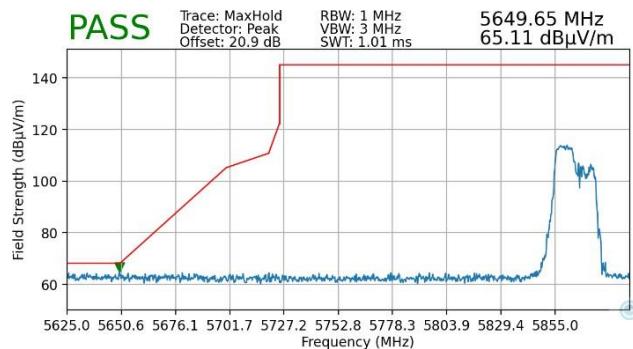

Plot 7-25. Lower Band Edge Plot MIMO (Peak – UNII Band 4)

FCC ID: C3K00002102A		MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M02504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)	Page 35 of 48	

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5865MHz

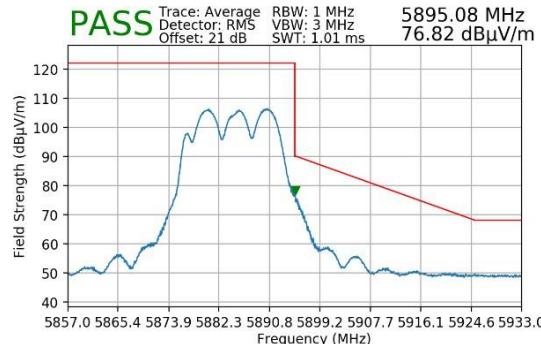

Plot 7-26. Upper Band Edge Plot MIMO (Average – UNII Band 4)




Plot 7-27. Upper Band Edge Plot MIMO (Peak – UNII Band 4)


FCC ID: C3K00002102A	MEASUREMENT REPORT (Class II Permissive Change)			Approved by: Technical Manager
Test Report S/N: 1M02504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)		Page 36 of 48

7.2.3 MIMO Band Edge Measurements (40MHz BW)

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS8
 Distance of Measurements: 3 Meters
 Operating Frequency: 5270MHz

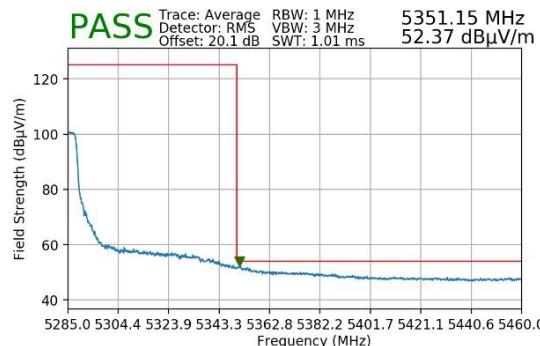


Plot 7-28. Upper Band Edge Plot MIMO (Average – UNII Band 2A)

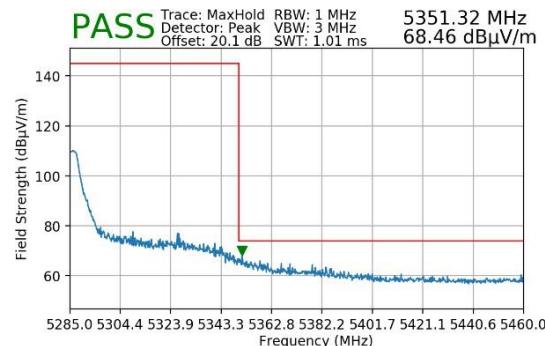


Plot 7-29. Lower Band Edge Plot MIMO (Peak – UNII Band 2A)

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5550MHz

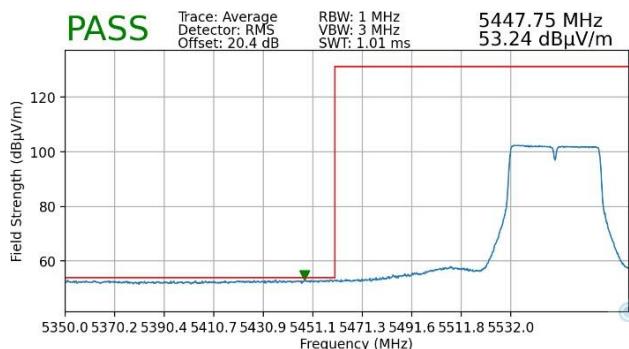


Plot 7-30. Lower Band Edge Plot MIMO (Average – UNII Band 2C)

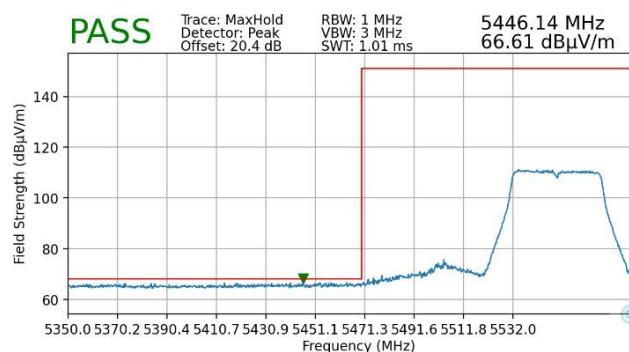

Plot 7-31. Lower Band Edge Plot MIMO (Peak – UNII Band 2C)


FCC ID: C3K00002102A	MEASUREMENT REPORT (Class II Permissive Change)			Approved by: Technical Manager
Test Report S/N: 1M02504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)	Page 37 of 48	
© 2025 ELEMENT				V11.2 9/11/2024

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS8
 Distance of Measurements: 3 Meters
 Operating Frequency: 5835MHz

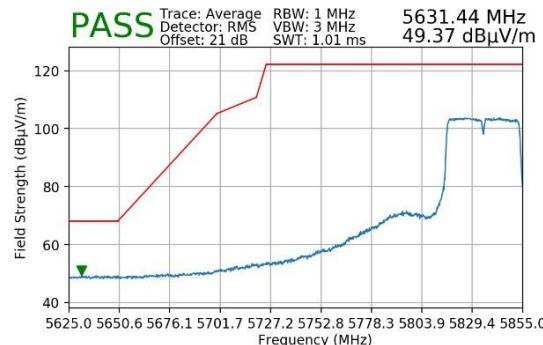


Plot 7-32. Lower Band Edge Plot MIMO (Peak – UNII Band 4)

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS8
 Distance of Measurements: 3 Meters
 Operating Frequency: 5875MHz

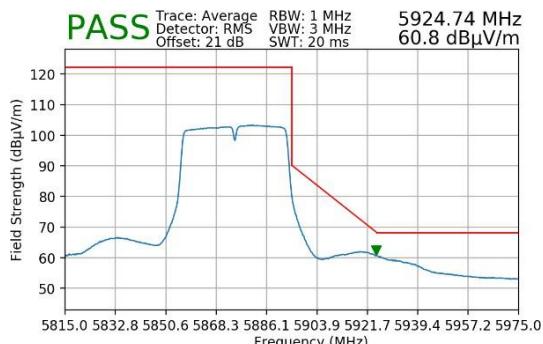

Plot 7-33. Upper Band Edge Plot MIMO (Average – UNII Band 4)

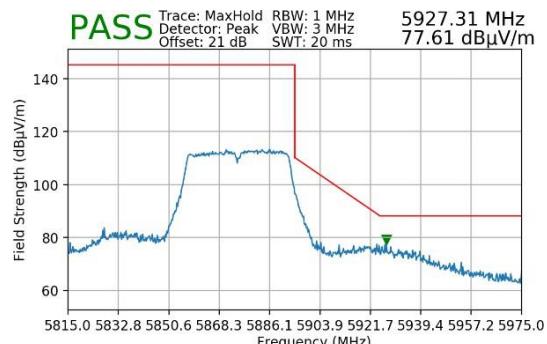


Plot 7-34. Upper Band Edge Plot MIMO (Peak – UNII Band 4)

FCC ID: C3K00002102A	MEASUREMENT REPORT (Class II Permissive Change)			Approved by: Technical Manager
Test Report S/N: 1M02504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)	Page 38 of 48	
© 2025 ELEMENT				V11.2 9/11/2024

7.2.4 MIMO Band Edge Measurements (80MHz BW)

Worst Case Mode: 802.11ac
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5775MHz

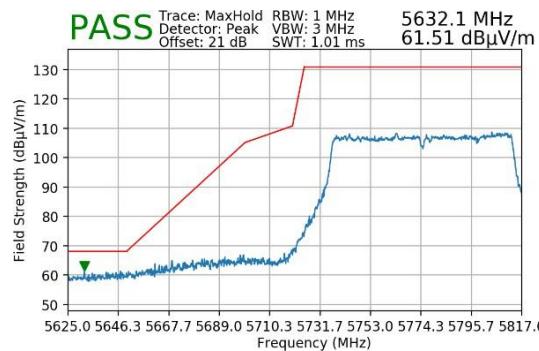


Plot 7-35. Lower Band Edge Plot MIMO (Peak – UNII Band 3)


FCC ID: C3K00002102A	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M02504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)	Page 39 of 48

7.2.5 MIMO Band Edge Measurements (160MHz BW)

Worst Case Mode: 802.11be
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5250MHz
 Channel: 50

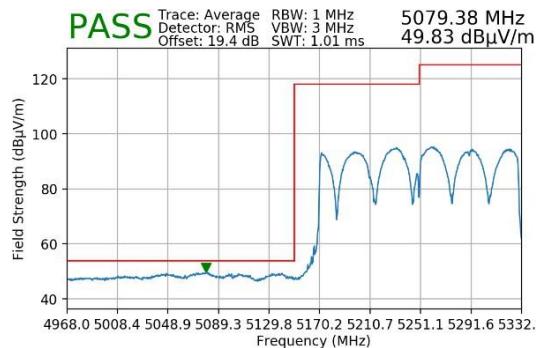

Plot 7-36. Lower Band Edge Plot MIMO (Average – UNII Band 1)

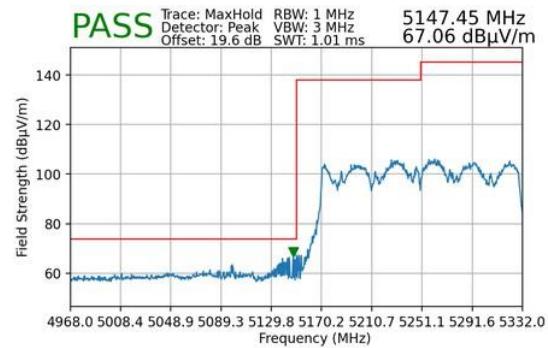

Plot 7-37. Lower Band Edge Plot MIMO (Peak – UNII Band 1)

FCC ID: C3K00002102A	MEASUREMENT REPORT (Class II Permissive Change)			Approved by: Technical Manager
Test Report S/N: 1M02504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)		Page 40 of 48

7.3 Line-Conducted Test Data

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst-case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below per FCC §15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-14. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10:2020, Section 6.2

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: C3K00002102A	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M02504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)	Page 41 of 48

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

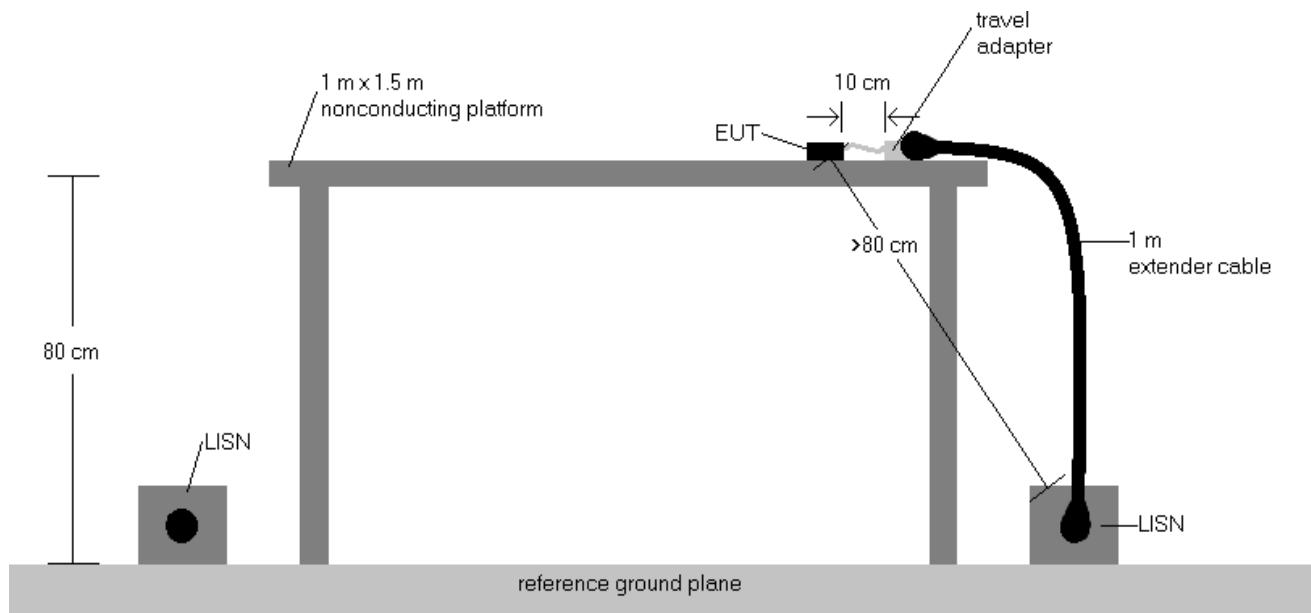
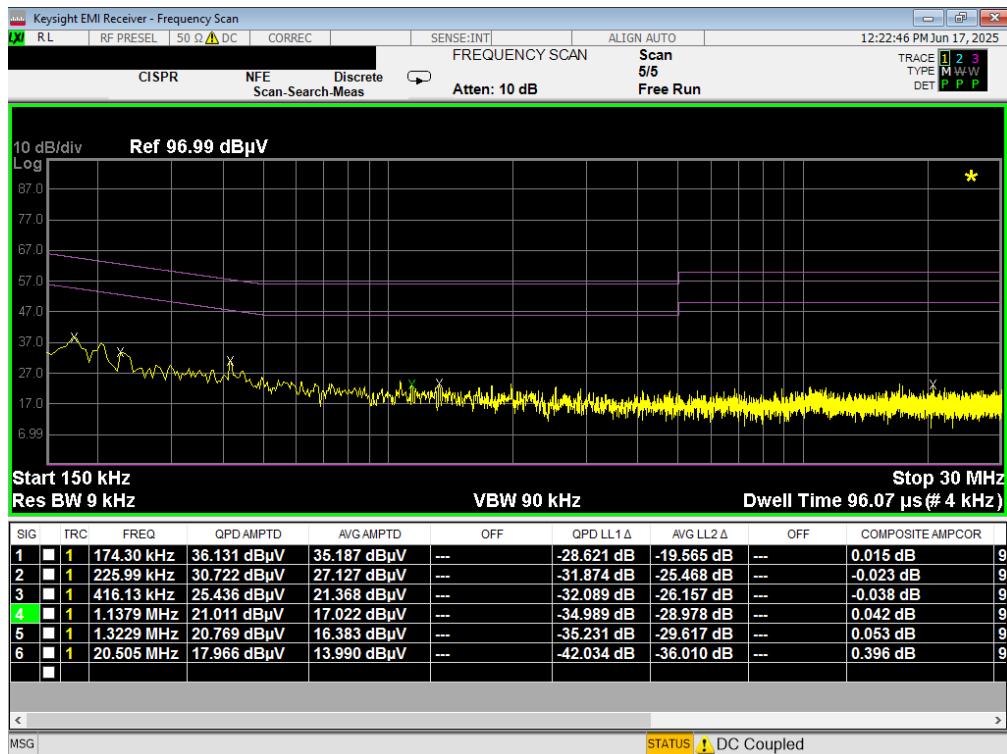
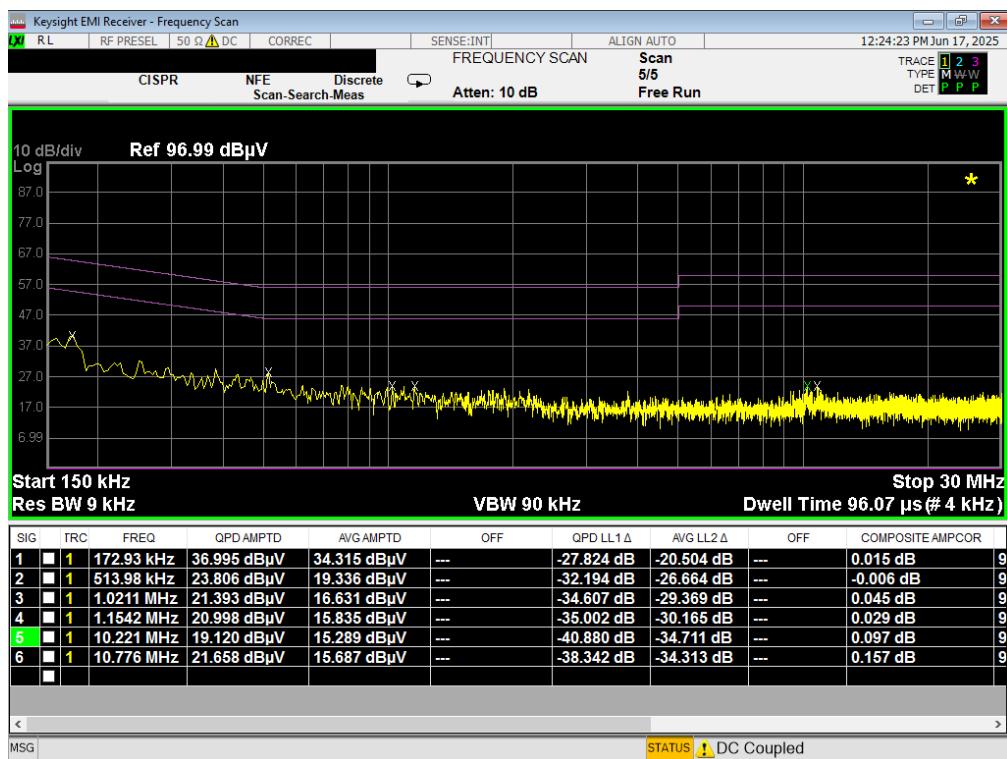


Figure 7-5. Test Instrument & Measurement Setup


Test Notes

1. All modes of operation were investigated, and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz is specified in §15.207 and RSS-Gen (8.8).
3. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
4. QP/AV Level (dB μ V) = QP/AV Analyzer/Receiver Level (dB μ V) + Corr. (dB)
5. Margin (dB) = QP/AV Limit (dB μ V) - QP/AV Level (dB μ V)
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.


FCC ID: C3K00002102A	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M02504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)	Page 42 of 48


Plot 7-38. Line Conducted Plot with 802.11a UNII Band 1 – Ch.40 (L1)

Plot 7-39. Line Conducted Plot with 802.11a UNII Band 1 – Ch.40 (N)

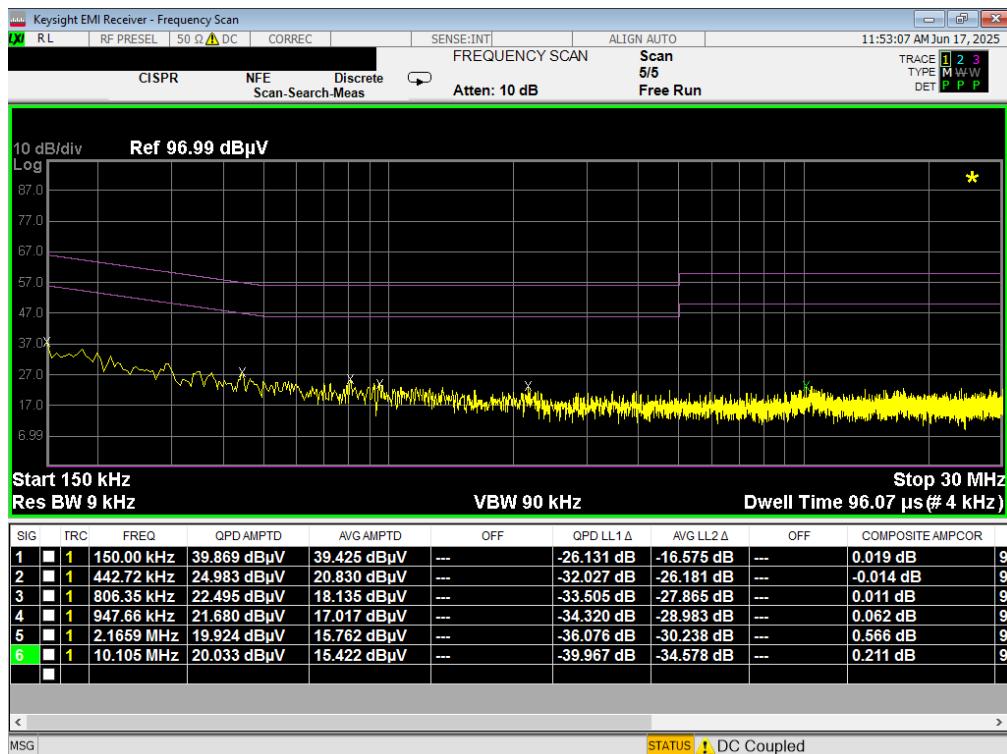FCC ID: C3K00002102A	MEASUREMENT REPORT (Class II Permissive Change)				Approved by: Technical Manager
Test Report S/N: 1M02504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)			Page 43 of 48

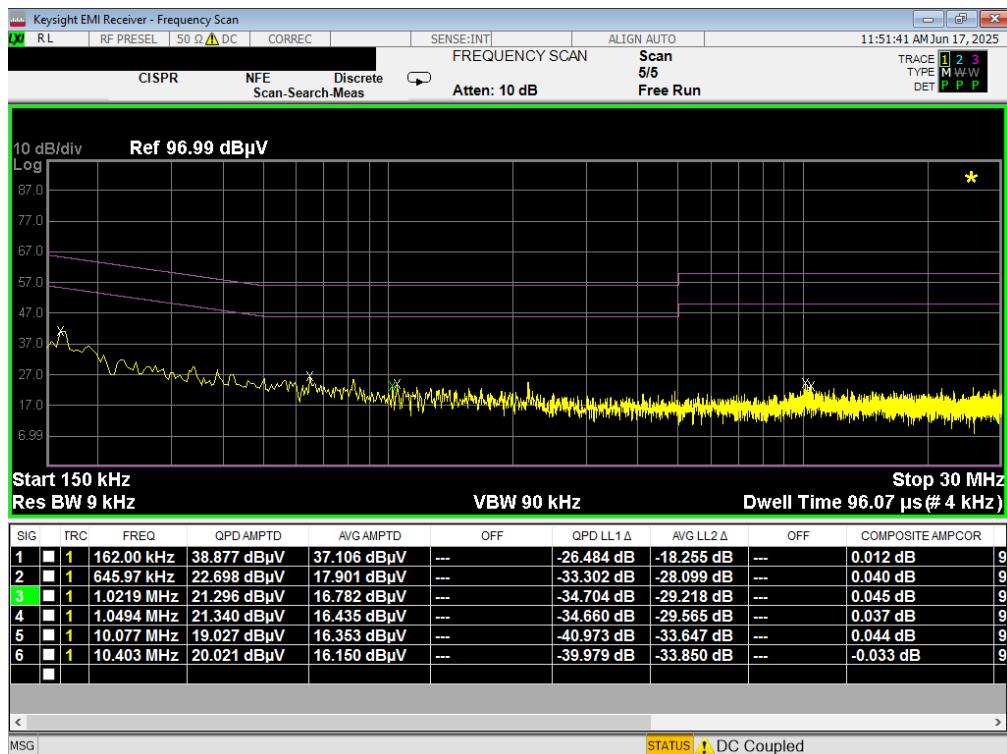


Plot 7-40. Line Conducted Plot with 802.11a UNII Band 2A – Ch.56 (L1)




Plot 7-41. Line Conducted Plot with 802.11a UNII Band 2A – Ch.56 (N)

FCC ID: C3K00002102A	MEASUREMENT REPORT (Class II Permissive Change)				Approved by: Technical Manager
Test Report S/N: 1M02504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)			Page 44 of 48

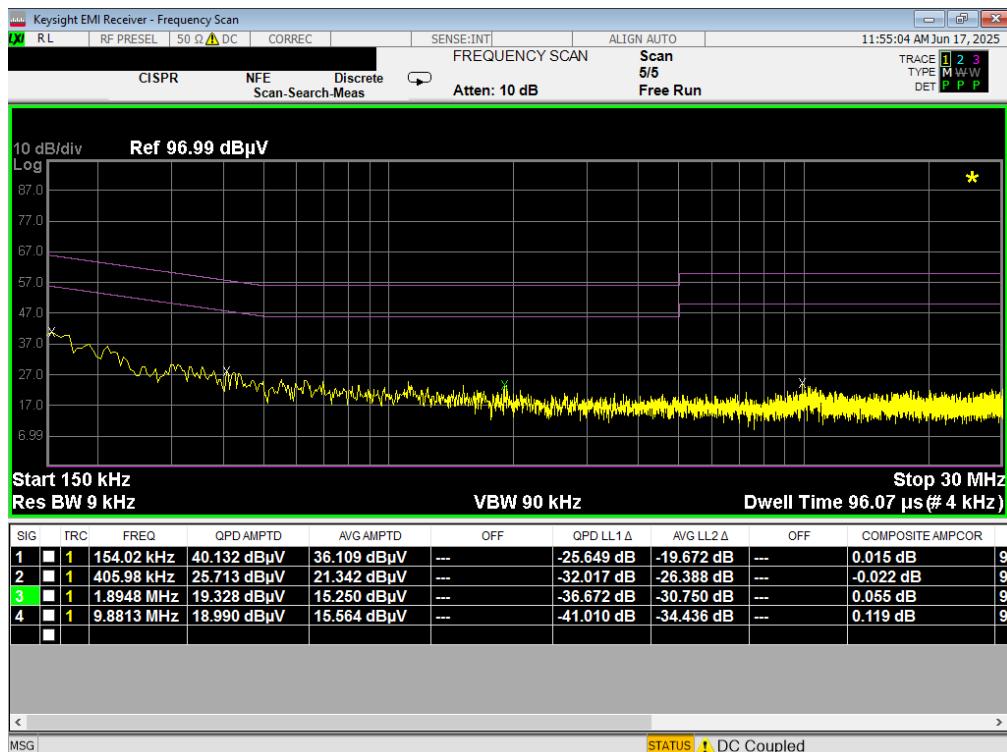


Plot 7-42. Line Conducted Plot with 802.11a UNII Band 2C – Ch.120 (L1)

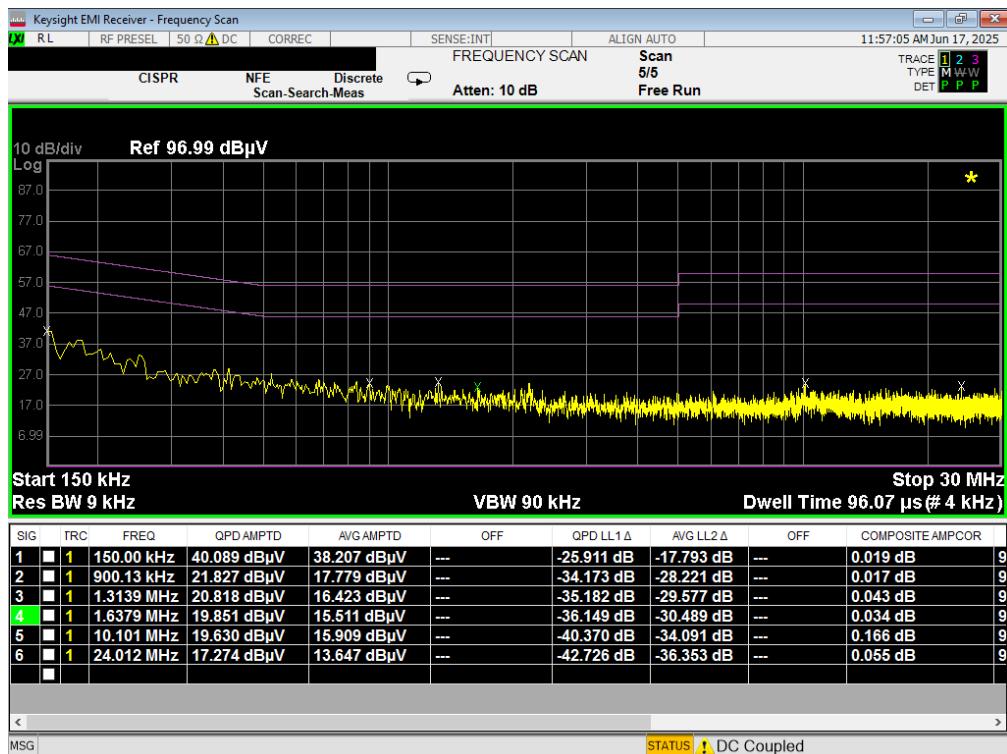


Plot 7-43. Line Conducted Plot with 802.11a UNII Band 2C – Ch.120 (N)

FCC ID: C3K00002102A	MEASUREMENT REPORT (Class II Permissive Change)				Approved by: Technical Manager
Test Report S/N: 1M02504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)	Page 45 of 48		

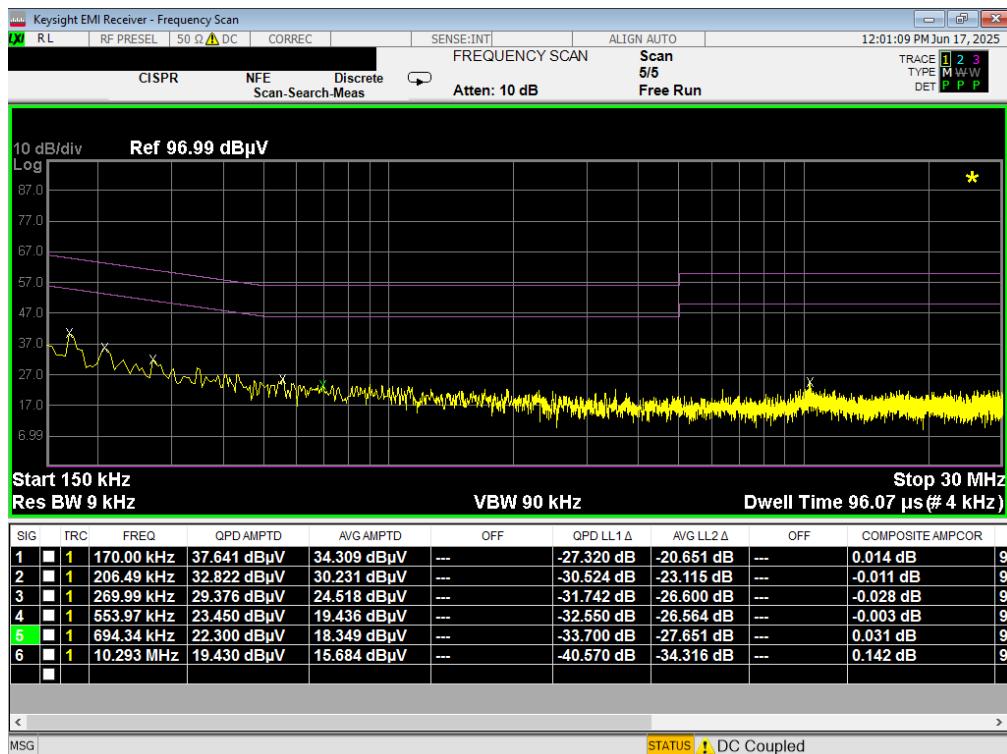


Plot 7-44. Line Conducted Plot with 802.11a UNII Band 3 – Ch.157 (L1)

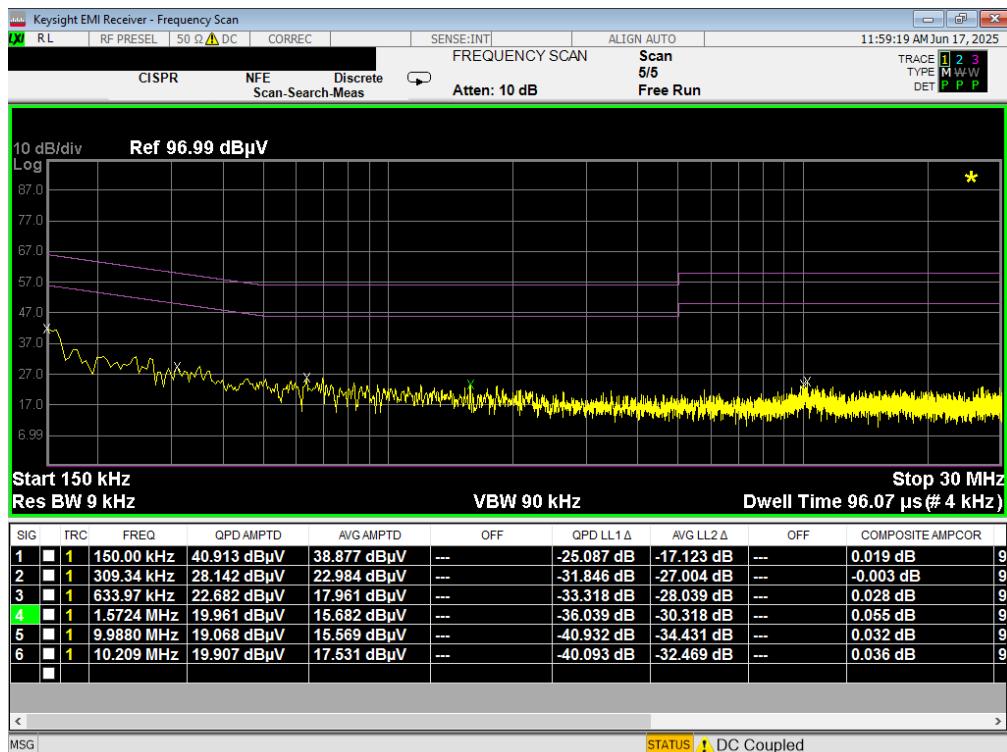


Plot 7-45. Line Conducted Plot with 802.11a UNII Band 3 – Ch.157 (N)

FCC ID: C3K00002102A	MEASUREMENT REPORT (Class II Permissive Change)					Approved by: Technical Manager
Test Report S/N: 1M02504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)				Page 46 of 48

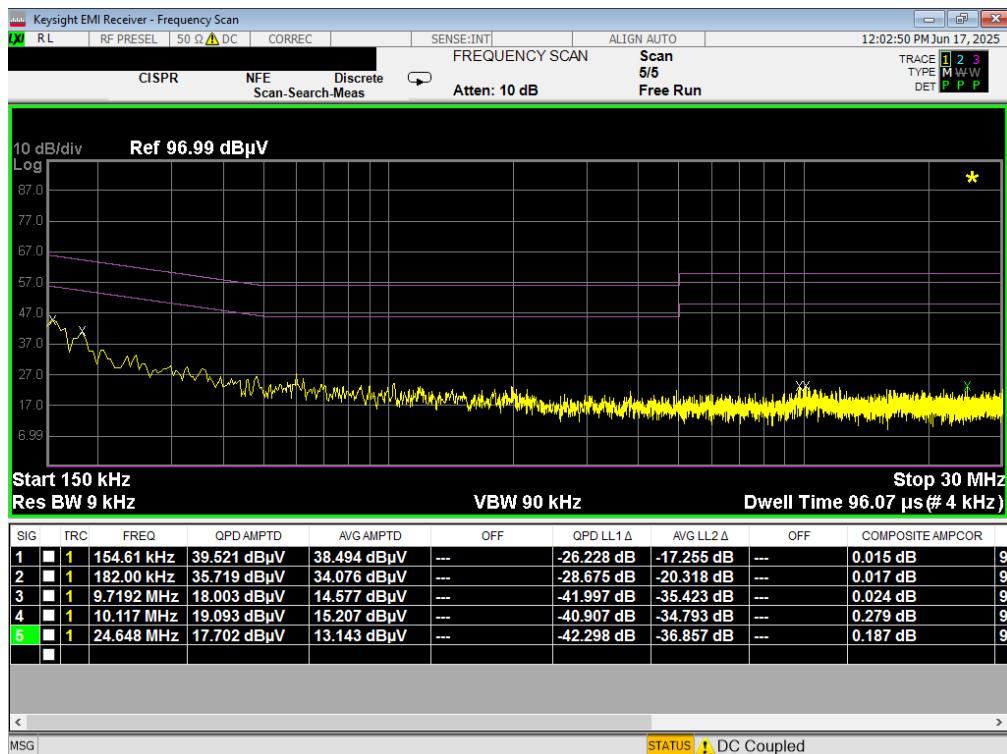

Plot 7-46. Line Conducted Plot with 802.11a UNII Band 4 – Ch.173 (L1)

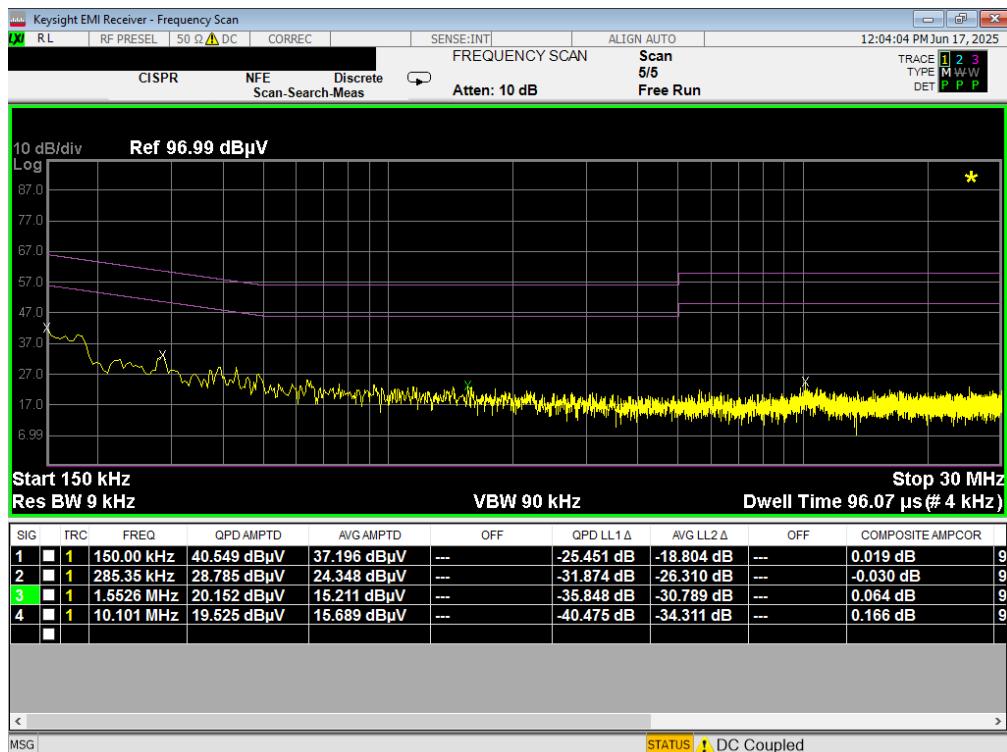

Plot 7-47. Line Conducted Plot with 802.11a UNII Band 4 – Ch.173 (N)

FCC ID: C3K00002102A	MEASUREMENT REPORT (Class II Permissive Change)				
Test Report S/N: 1M02504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)			

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Microsoft Module FCC ID: C3K00002102A** complies with the relevant FCC rules for module integration into a host product.

FCC ID: C3K00002102A		MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M02504010035-10.C3K	Test Dates: 4/1/2025 - 6/16/2025	EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device)		Page 48 of 48