



Microsoft Corporation

1631

DTS

FCC 15.207:2014

FCC 15.247:2014

Report #: MCSO1702.1



Report Prepared By Northwest EMC Inc.

NORTHWEST EMC – (888) 364-2378 – www.nwemc.com

California – Minnesota – Oregon – New York – Washington

CERTIFICATE OF TEST

Last Date of Test: March 10, 2014
 Microsoft Corporation
 Model: 1631

Emissions

| Test Description | Specification | Test Method | Pass/Fail |
|----------------------------------|-----------------|------------------|-----------|
| Duty Cycle | FCC 15.247:2014 | ANSI C63.10:2009 | Pass |
| Occupied Bandwidth | FCC 15.247:2014 | ANSI C63.10:2009 | Pass |
| Output Power | FCC 15.247:2014 | ANSI C63.10:2009 | Pass |
| Power Spectral Density | FCC 15.247:2014 | ANSI C63.10:2009 | Pass |
| Band Edge Compliance | FCC 15.247:2014 | ANSI C63.10:2009 | Pass |
| Spurious Conducted Emissions | FCC 15.247:2014 | ANSI C63.10:2009 | Pass |
| Spurious Radiated Emissions | FCC 15.247:2014 | ANSI C63.10:2009 | Pass |
| AC Powerline Conducted Emissions | FCC 15.207:2014 | ANSI C63.10:2009 | Pass |

Deviations From Test Standards

None

Approved By:



Rod Munro, Operations Manager



NVLAP Lab Code: 200629-0

This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America.

Product compliance is the responsibility of the client, therefore the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. This Report may only be duplicated in its entirety. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test.

REVISION HISTORY

| Revision Number | Description | Date | Page Number |
|-----------------|-------------|------|-------------|
| 00 | None | | |

Barometric Pressure

The recorded barometric pressure has been normalized to sea level.

United States

FCC - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

A2LA - Accredited by A2LA to ISO / IEC Guide 65 as a product certifier. This allows Northwest EMC to certify transmitters to FCC and IC specifications.

NVLAP - Each laboratory is accredited by NVLAP to ISO 17025

Canada

IC - Recognized by Industry Canada as a Certification Body (CB). Certification chambers and Open Area Test Sites are filed with IC.

European Union

European Commission – Validated by the European Commission as a Conformity Assessment Body (CAB) under the EMC directive and as a Notified Body under the R&TTE Directive.

Australia/New Zealand

ACMA - Recognized by ACMA as a CAB for the acceptance of test data.

Korea

KCC / RRA - Recognized by KCC's RRA as a CAB for the acceptance of test data.

Japan

VCCI - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

Taiwan

BSMI – Recognized by BSMI as a CAB for the acceptance of test data.

NCC - Recognized by NCC as a CAB for the acceptance of test data.

Singapore

IDA – Recognized by IDA as a CAB for the acceptance of test data.

Hong Kong

OFTA – Recognized by OFTA as a CAB for the acceptance of test data.

Vietnam

MIC – Recognized by MIC as a CAB for the acceptance of test data.

Russia

GOST – Accredited by Certinform VNIINMASH, CERTINFO, SAMTES, and Federal CHEC to perform EMC and Hygienic testing for Information Technology products to GOST standards.

SCOPE

For details on the Scopes of our Accreditations, please visit:

<http://www.nwemc.com/accreditations/>

Measurement Uncertainty

When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.

A measurement uncertainty estimation has been performed for each test per our internal quality document WP 342. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty ($K=2$) for each test is listed below. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-1 as applicable), and are available upon request.



The following table represents the Measurement Uncertainty (MU) budgets for each of the tests that may be contained in this report.

| Test | + MU | - MU |
|---------------------------------------|------|-------|
| Frequency Accuracy (Hz) | 0.12 | -0.01 |
| Amplitude Accuracy (dB) | 0.49 | -0.49 |
| Conducted Power (dB) | 0.41 | -0.41 |
| Radiated Power via Substitution (dB) | 0.69 | -0.68 |
| Temperature (degrees C) | 0.81 | -0.81 |
| Humidity (% RH) | 2.89 | -2.89 |
| Field Strength (dB) | 3.80 | -3.80 |
| AC Powerline Conducted Emissions (dB) | 2.94 | -2.94 |

FACILITIES



| | | | | |
|---|---|--|---|---|
| Oregon Labs EV01-12 22975 NW Evergreen Pkwy Hillsboro, OR 97124 (503) 844-4066 | California Labs OC01-13 41 Tesla Irvine, CA 92618 (949) 861-8918 | New York Labs NY01-04 4939 Jordan Rd. Elbridge, NY 13060 (315) 685-0796 | Minnesota Labs MN01-08 9349 W Broadway Ave. Brooklyn Park, MN 55445 (763) 425-2281 | Washington Labs NC01-05, SU02, SU07 19201 120 th Ave. NE Bothell, WA 98011 (425) 984-6600 |
| VCCI | | | | |
| A-0108 | A-0029 | | A-0109 | A-0110 |
| Industry Canada | | | | |
| 2834D-1, 2834D-2 | 2834B-1, 2834B-2, 2834B-3 | | 2834E-1 | 2834C-1 |
| NVLAP | | | | |
| NVLAP Lab Code: 200630-0 | NVLAP Lab Code: 200676-0 | NVLAP Lab Code: 200761-0 | NVLAP Lab Code: 200881-0 | NVLAP Lab Code: 200629-0 |

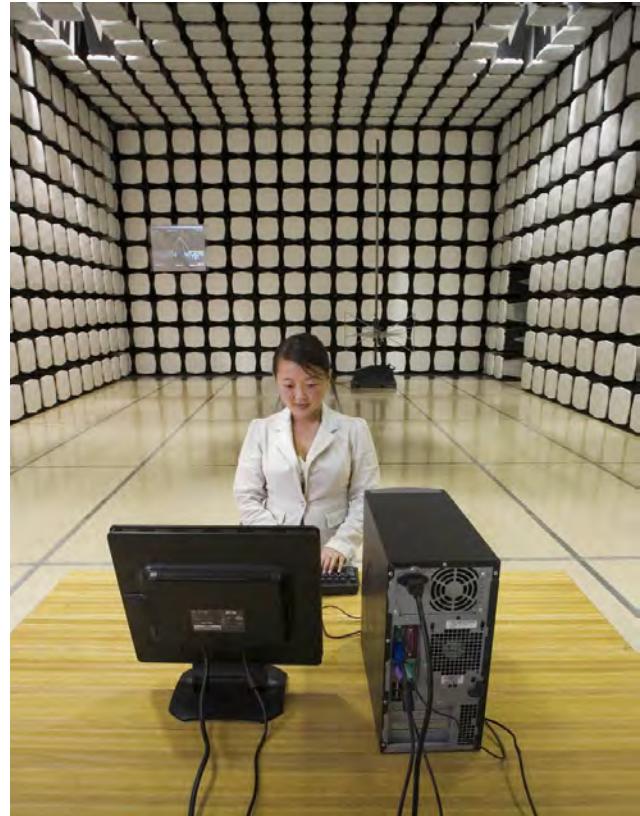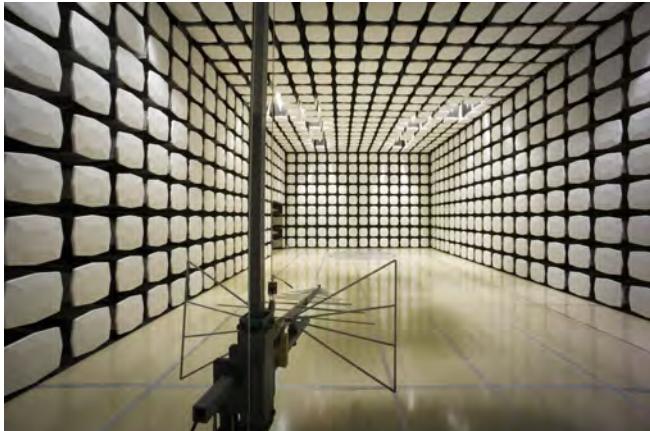

Client and Equipment Under Test (EUT) Information

| | |
|---------------------------------|------------------------|
| Company Name: | Microsoft Corporation |
| Address: | One Microsoft Way |
| City, State, Zip: | Redmond, WA 98052-6399 |
| Test Requested By: | Mike Boucher |
| Model: | 1631 |
| First Date of Test: | March 06, 2012 |
| Last Date of Test: | March 10, 2014 |
| Receipt Date of Samples: | March 06, 2012 |
| Equipment Design Stage: | Production |
| Equipment Condition: | No Damage |

Information Provided by the Party Requesting the Test**Functional Description of the EUT (Equipment Under Test):**

Handheld computing device with Bluetooth radio module with 1 antenna(s).

Testing Objective:

To demonstrate compliance to FCC 15.247 requirements for BLE.

Configuration MCSO1702- 1

| Software/Firmware Running during test | |
|---------------------------------------|---------|
| Description | Version |
| Wi-Fi Tool | V2.3 |

| EUT | | | |
|---------------------------|-----------------------|-------------------|---------------|
| Description | Manufacturer | Model/Part Number | Serial Number |
| Handheld Computing Device | Microsoft Corporation | 1631 | 041152140753 |

| Peripherals in test setup boundary | | | |
|------------------------------------|-----------------------|-------------------|---------------|
| Description | Manufacturer | Model/Part Number | Serial Number |
| Laptop Computer | Lenovo | ThinkPad 4174BB4 | R9-PMLAF |
| USB Ethernet Adapter | Cisco | Linksys USB300M | CU906M715225 |
| Detachable Keyboard | Microsoft Corporation | X889242-BBH | 000596140354 |
| AC Adapter (1) | Microsoft Corporation | X891182-003 | 0D130C1VPC42 |
| AC Adapter (2) | Lenovo | 42T4430 | 36200147 |

| Cables | | | | | |
|------------|--------|------------|---------|---------------------------|---------------------------|
| Cable Type | Shield | Length (m) | Ferrite | Connection 1 | Connection 2 |
| Ethernet | No | 1.5m | No | USB Ethernet Adapter | Laptop Computer |
| AC Power | No | 0.5m | No | AC Mains | AC Adapter (1) |
| DC Power | No | 1.8m | No | AC Adapter (1) | Handheld Computing Device |
| AC Power | No | 0.85m | No | AC Mains | AC Adapter (2) |
| DC Power | No | 1.8m | No | AC Adapter (2) | Laptop Computer |
| USB | Yes | 0.1m | No | Handheld Computing Device | USB Ethernet Adapter |

PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.

Configuration MCSO1702- 2

| EUT | | | | |
|---------------------------|-----------------------|-------------------|---------------|--|
| Description | Manufacturer | Model/Part Number | Serial Number | |
| Handheld Computing Device | Microsoft Corporation | 1631 | 041152140753 | |

| Peripherals in test setup boundary | | | | |
|------------------------------------|-----------------------|-------------------|---------------|--|
| Description | Manufacturer | Model/Part Number | Serial Number | |
| USB Ethernet Adapter | Cisco | Linksys USB300M | CU906M715225 | |
| Detachable Keyboard | Microsoft Corporation | X889242-BBH | 000596140354 | |
| AC Adapter (1) | Microsoft Corporation | X891182-003 | 0D130C1VPC42 | |
| Headphones | Unknown | None | None | |

| Cables | | | | | |
|--------------|--------|------------|---------|---------------------------|---------------------------|
| Cable Type | Shield | Length (m) | Ferrite | Connection 1 | Connection 2 |
| AC Power | No | 0.5m | No | AC Mains | AC Adapter (1) |
| DC Power | No | 1.8m | No | AC Adapter (1) | Handheld Computing Device |
| Audio Cable | No | 1.1m | No | Handheld Computing Device | Headphones |
| Display Port | Yes | 1.8m | No | Handheld Computing Device | Unterminated |
| USB | Yes | 0.1m | No | Handheld Computing Device | USB Ethernet Adapter |
| Ethernet | No | 1.5m | No | USB Ethernet Adapter | Unterminated |

PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.

Equipment Modifications

| Item | Date | Test | Modification | Note | Disposition of EUT |
|------|-----------|----------------------------------|--------------------------------------|---|---|
| 1 | 3/6/2014 | Band Edge Compliance | Tested as delivered to Test Station. | No EMI suppression devices were added or modified during this test. | EUT remained at Northwest EMC following the test. |
| 2 | 3/6/2014 | Duty Cycle | Tested as delivered to Test Station. | No EMI suppression devices were added or modified during this test. | EUT remained at Northwest EMC following the test. |
| 3 | 3/6/2014 | Occupied Bandwidth | Tested as delivered to Test Station. | No EMI suppression devices were added or modified during this test. | EUT remained at Northwest EMC following the test. |
| 4 | 3/6/2014 | Output Power | Tested as delivered to Test Station. | No EMI suppression devices were added or modified during this test. | EUT remained at Northwest EMC following the test. |
| 5 | 3/6/2014 | Spurious Conducted Emissions | Tested as delivered to Test Station. | No EMI suppression devices were added or modified during this test. | EUT remained at Northwest EMC following the test. |
| 6 | 3/6/2014 | Power Spectral Density | Tested as delivered to Test Station. | No EMI suppression devices were added or modified during this test. | EUT remained at Northwest EMC following the test. |
| 7 | 3/7/2014 | AC Powerline Conducted Emissions | Tested as delivered to Test Station. | No EMI suppression devices were added or modified during this test. | EUT remained at Northwest EMC following the test. |
| 8 | 3/10/2014 | Spurious Radiated Emissions | Tested as delivered to Test Station. | No EMI suppression devices were added or modified during this test. | Scheduled testing was completed. |

DUTY CYCLE

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

| Description | Manufacturer | Model | ID | Last Cal. | Interval |
|-------------------|--------------------|------------------|-----|-----------|----------|
| Signal Generator | Agilent | N5183A | TIA | 1/27/2012 | 36 |
| NC02 Cable | ESM Cable Corp. | TTBJ-141 KMKM-72 | NC5 | 7/3/2013 | 12 |
| 40GHz DC Block | Fairview Microwave | SD3379 | AMJ | 7/3/2013 | 12 |
| Attenuator | Fairview Microwave | SA4014-20 | TKE | 2/13/2014 | 12 |
| Spectrum Analyzer | Agilent | E4446A | AAT | 6/28/2012 | 24 |

TEST DESCRIPTION



The Duty Cycle (x) of the single channel operation of the radio as controlled by the provided test software was measured for each of the EUT operating modes.

The measurements were made using a zero span on the spectrum analyzer to see the pulses in the time domain. The transmit power was set to its default maximum. A direct connection was made between the RF output of the EUT and a spectrum analyzer. Attenuation and a DC block were used.


The duty cycle was calculated by dividing the transmission pulse duration (T) by the total period of a single on and total off time.

If the transmit duty cycle < 98 percent, burst gating was used during some of the other tests in this report to only measure during the burst duration.


| EUT: 1631 | | Work Order: MCSO1702 | | | | | |
|--|---|--|--------|------------------|-----------|-------|--------|
| Serial Number: 041152140753 | | Date: 03/06/14 | | | | | |
| Customer: Microsoft Corporation | | Temperature: 23°C | | | | | |
| Attendees: None | | Humidity: 40% | | | | | |
| Project: None | | Barometric Pres.: 1001 | | | | | |
| Tested by: Richard Mellroth | | Job Site: NC06 | | | | | |
| TEST SPECIFICATIONS | | | | | | | |
| FCC 15.247:2014 | | Test Method: ANSI C63.10:2009 | | | | | |
| COMMENTS | | | | | | | |
| Adapter cable loss of 0.75dB added to analyzer reference level offset. | | | | | | | |
| DEVIATIONS FROM TEST STANDARD | | | | | | | |
| None | | | | | | | |
| Configuration # | 1 | Signature:  | | | | | |
| | | Pulse Width | Period | Number of Pulses | Value (%) | Limit | Result |
| BLE ADV | | | | | | | |
| Low Channel 0, 2402 MHz | | 378 uS | 625 uS | 1 | 60.5 | N/A | N/A |
| Low Channel 0, 2402 MHz | | N/A | N/A | 5 | N/A | N/A | N/A |
| Mid Channel 12, 2426 MHz | | 379 uS | 625 uS | 1 | 60.6 | N/A | N/A |
| Mid Channel 12, 2426 MHz | | N/A | N/A | 5 | N/A | N/A | N/A |
| High Channel 39, 2480 MHz | | 379 uS | 626 uS | 1 | 60.5 | N/A | N/A |
| High Channel 39, 2480 MHz | | N/A | N/A | 5 | N/A | N/A | N/A |
| BLE DATA | | | | | | | |
| Low Channel 1, 2404 MHz | | 379 uS | 625 uS | 1 | 60.6 | N/A | N/A |
| Low Channel 1, 2404 MHz | | N/A | N/A | 5 | N/A | N/A | N/A |
| Mid Channel 19, 2440 MHz | | 379 uS | 625 uS | 1 | 60.6 | N/A | N/A |
| Mid Channel 19, 2440 MHz | | N/A | N/A | 5 | N/A | N/A | N/A |
| High Channel 38, 2478 MHz | | 379 uS | 625 uS | 1 | 60.6 | N/A | N/A |
| High Channel 38, 2478 MHz | | N/A | N/A | 5 | N/A | N/A | N/A |

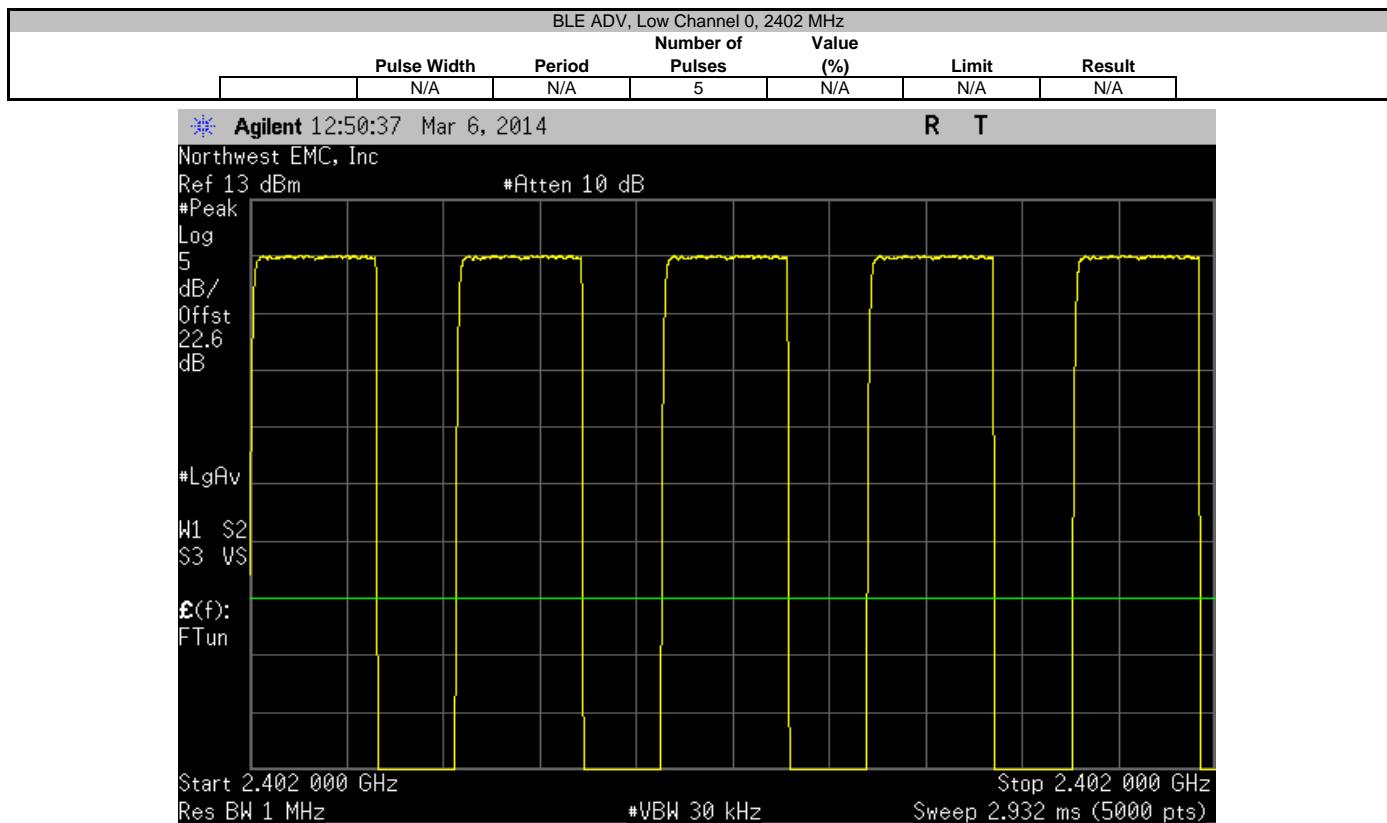
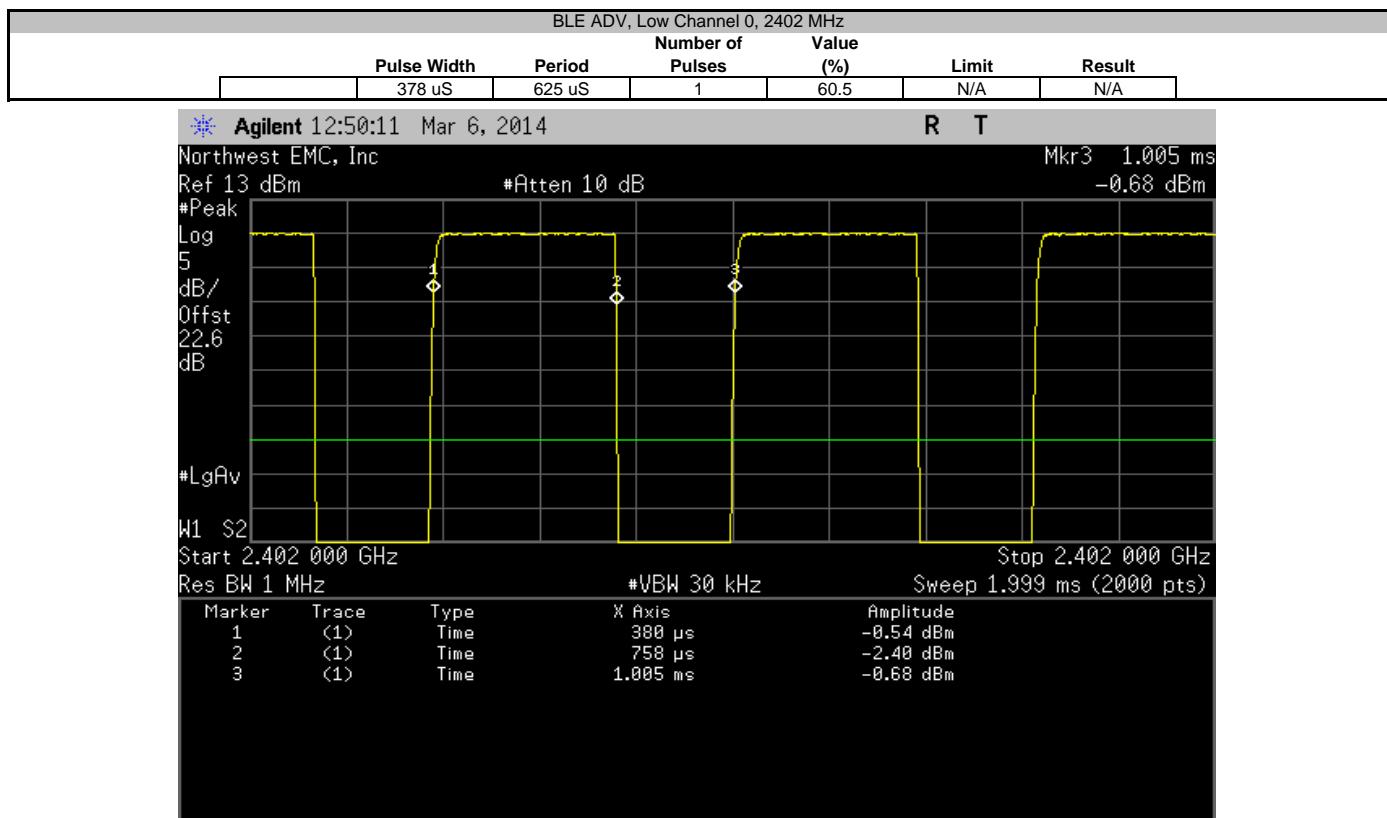




| BLE ADV, Mid Channel 12, 2426 MHz | | | | | |
|-----------------------------------|-------------|------------------|-----------|-------|--------|
| Pulse Width | Period | Number of Pulses | Value (%) | Limit | Result |
| 379 μ s | 625 μ s | 1 | 60.6 | N/A | N/A |

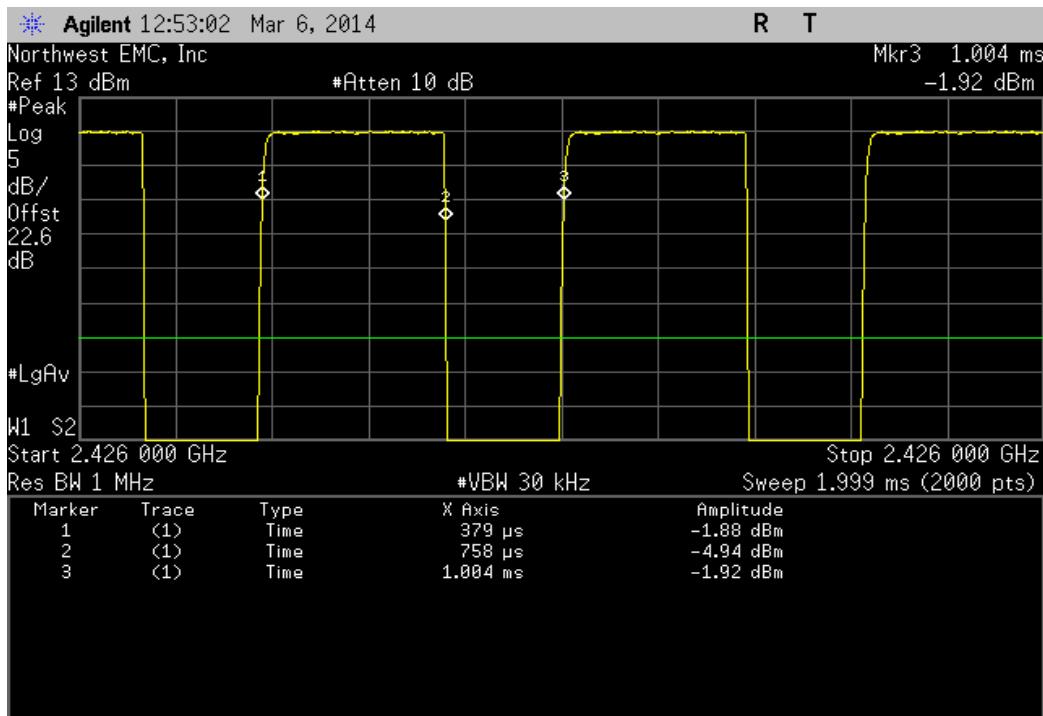


| BLE ADV, Mid Channel 12, 2426 MHz | | | | | |
|-----------------------------------|--------|------------------|-----------|-------|--------|
| Pulse Width | Period | Number of Pulses | Value (%) | Limit | Result |
| N/A | N/A | 5 | N/A | N/A | N/A |

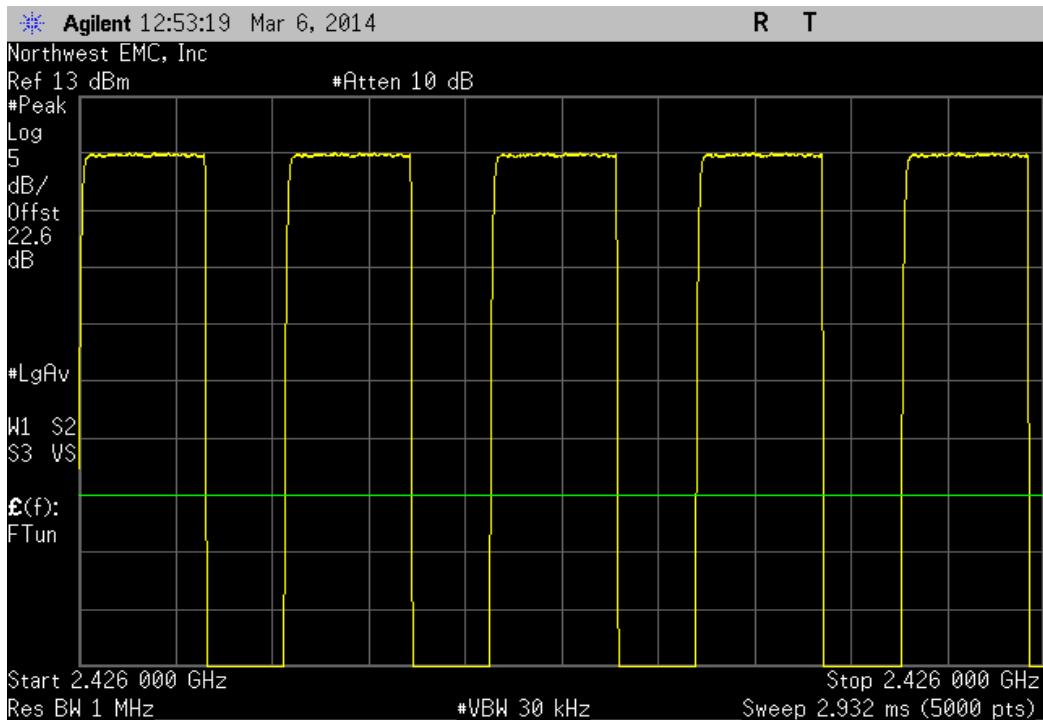

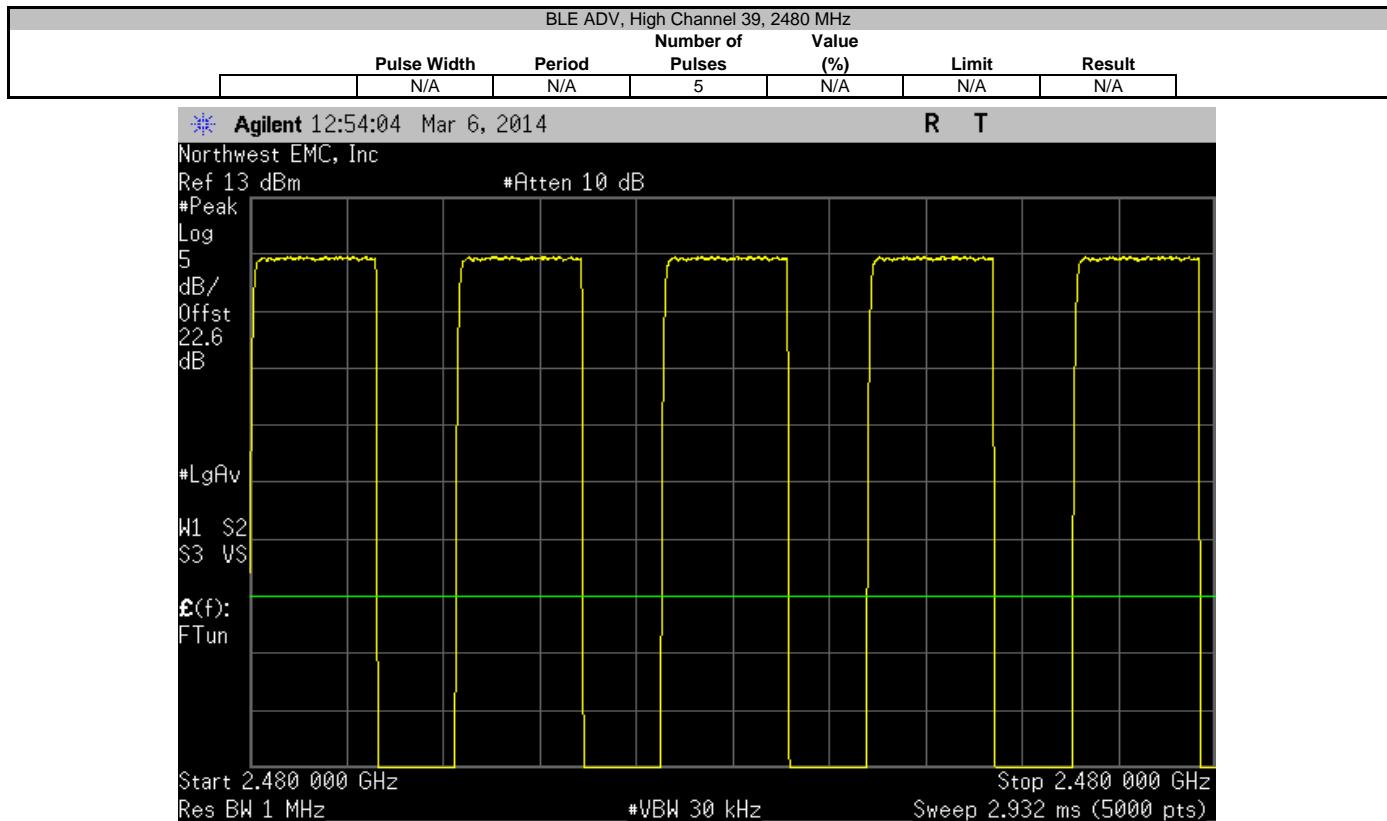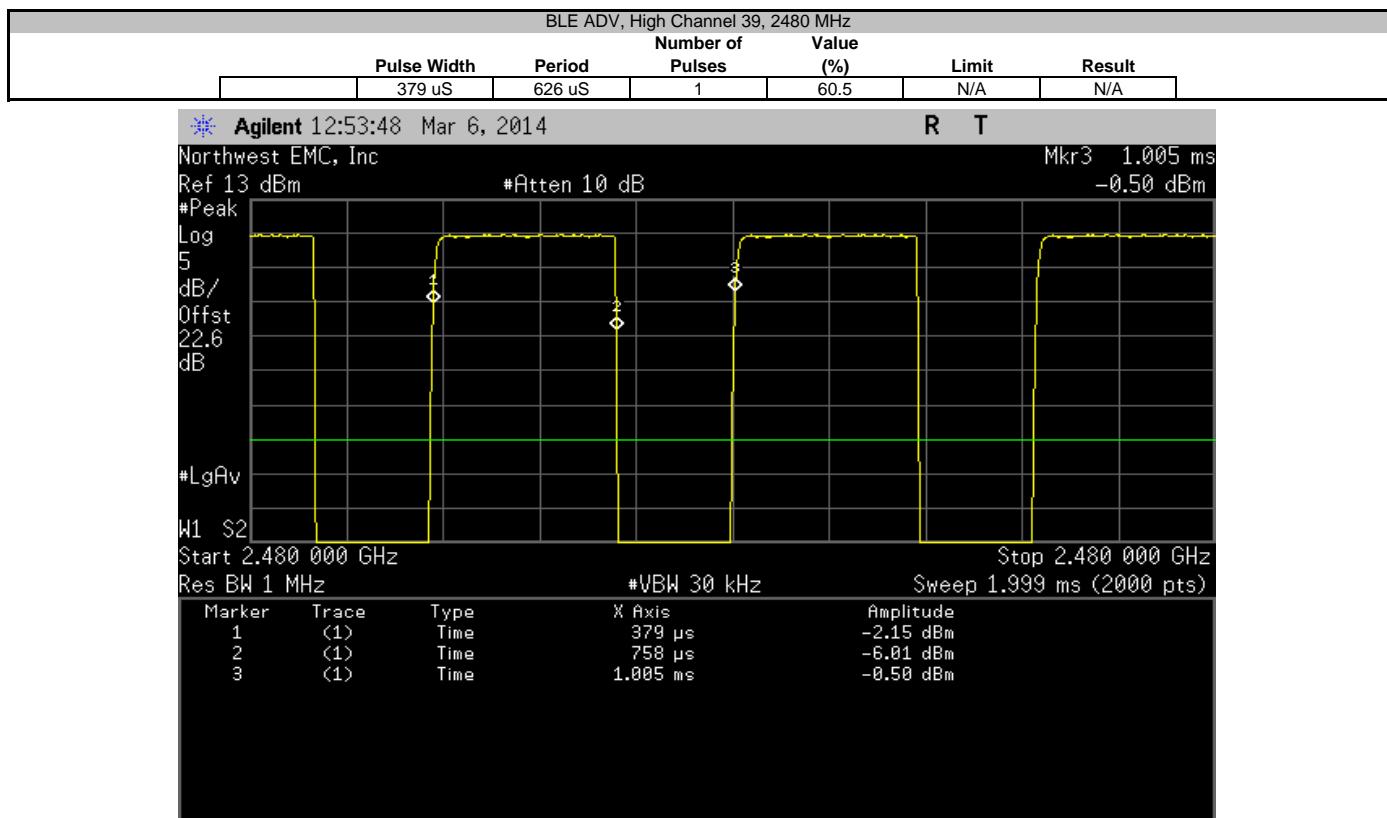


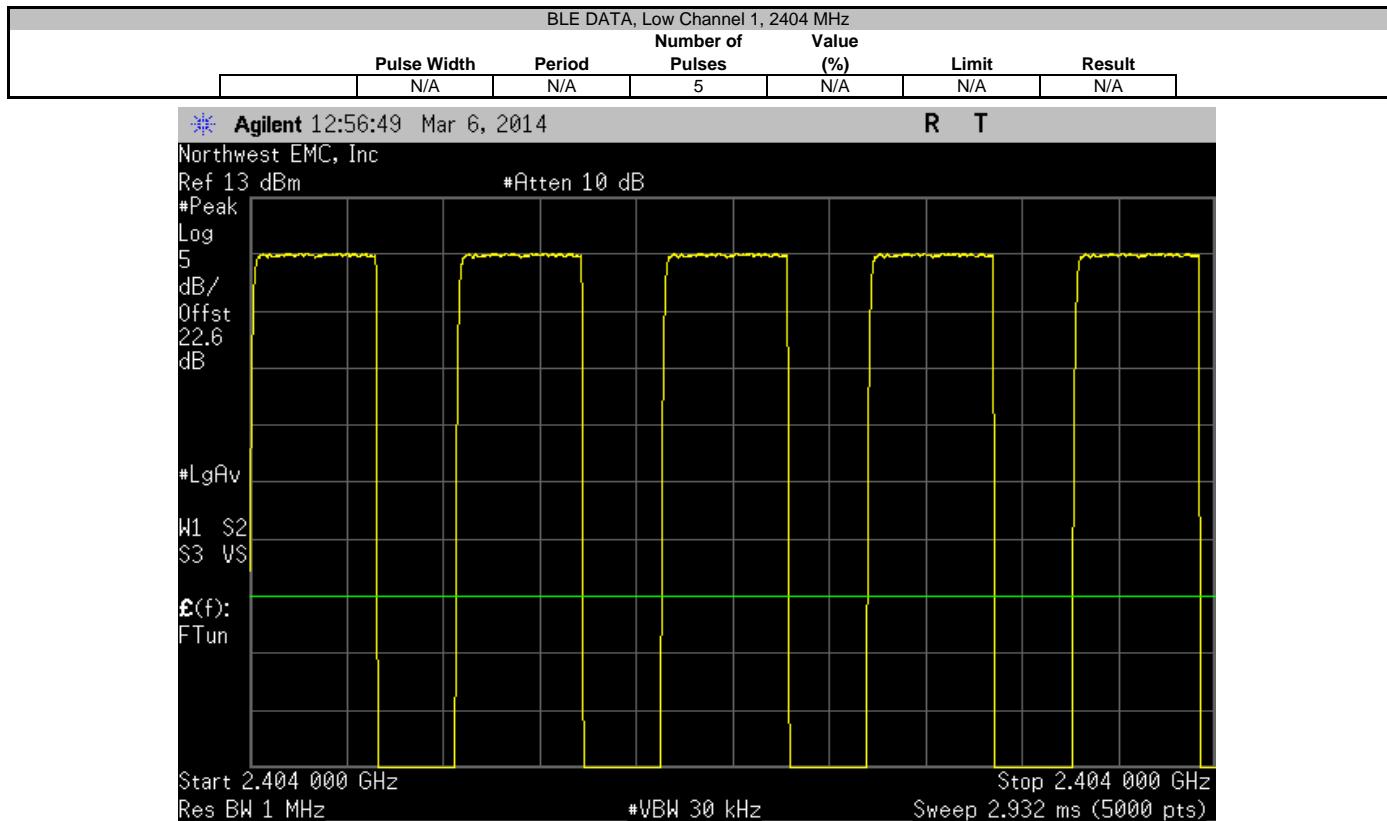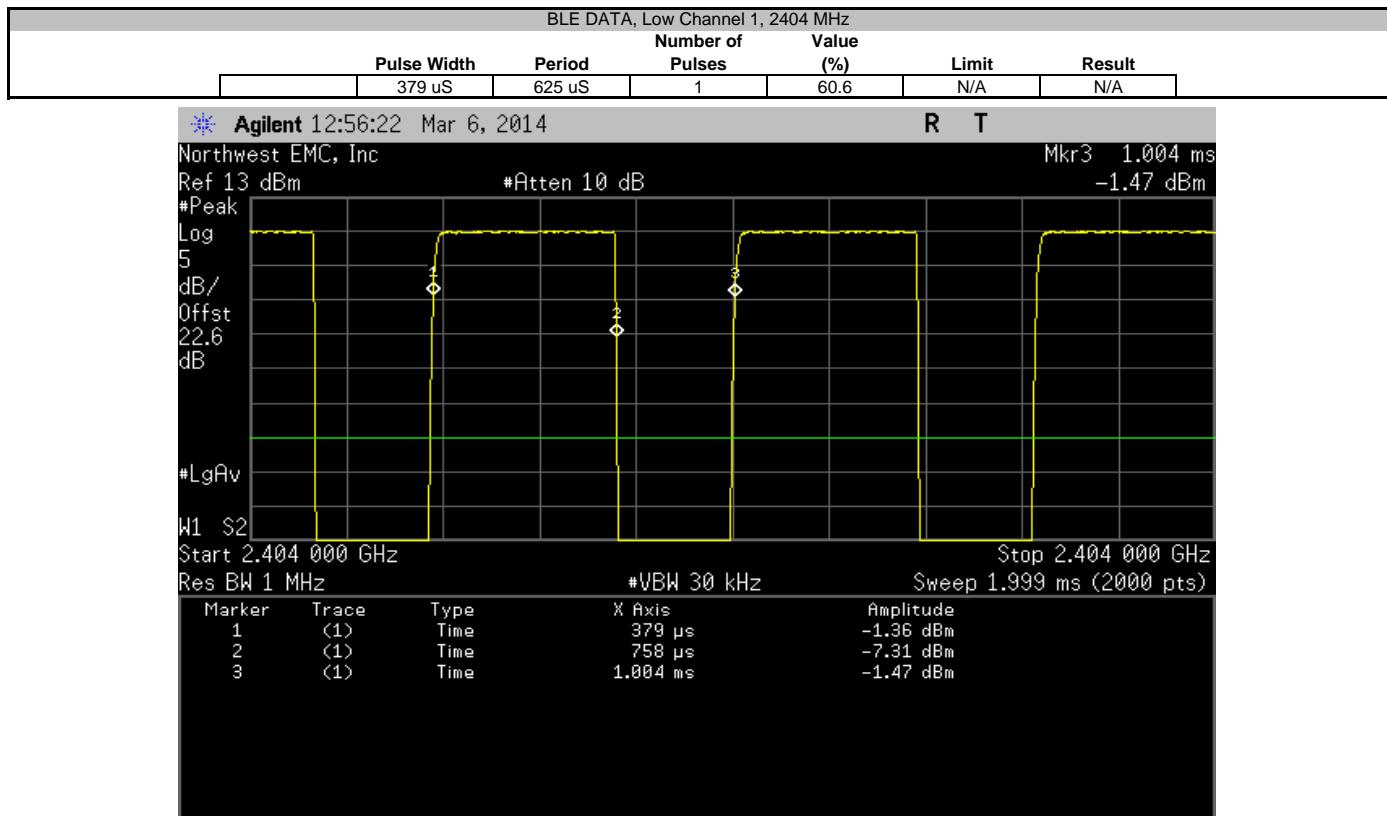


| BLE DATA, Mid Channel 19, 2440 MHz | | | | | |
|------------------------------------|--------|------------------|-----------|-------|--------|
| Pulse Width | Period | Number of Pulses | Value (%) | Limit | Result |
| 379 uS | 625 uS | 1 | 60.6 | N/A | N/A |

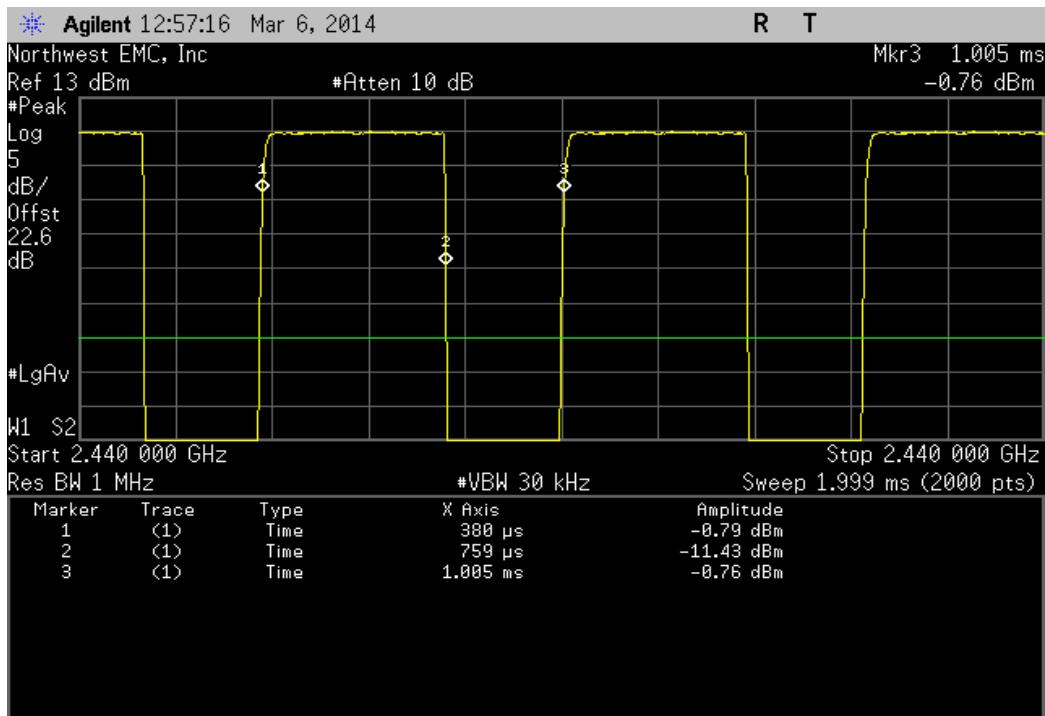


| BLE DATA, Mid Channel 19, 2440 MHz | | | | | |
|------------------------------------|--------|------------------|-----------|-------|--------|
| Pulse Width | Period | Number of Pulses | Value (%) | Limit | Result |
| N/A | N/A | 5 | N/A | N/A | N/A |

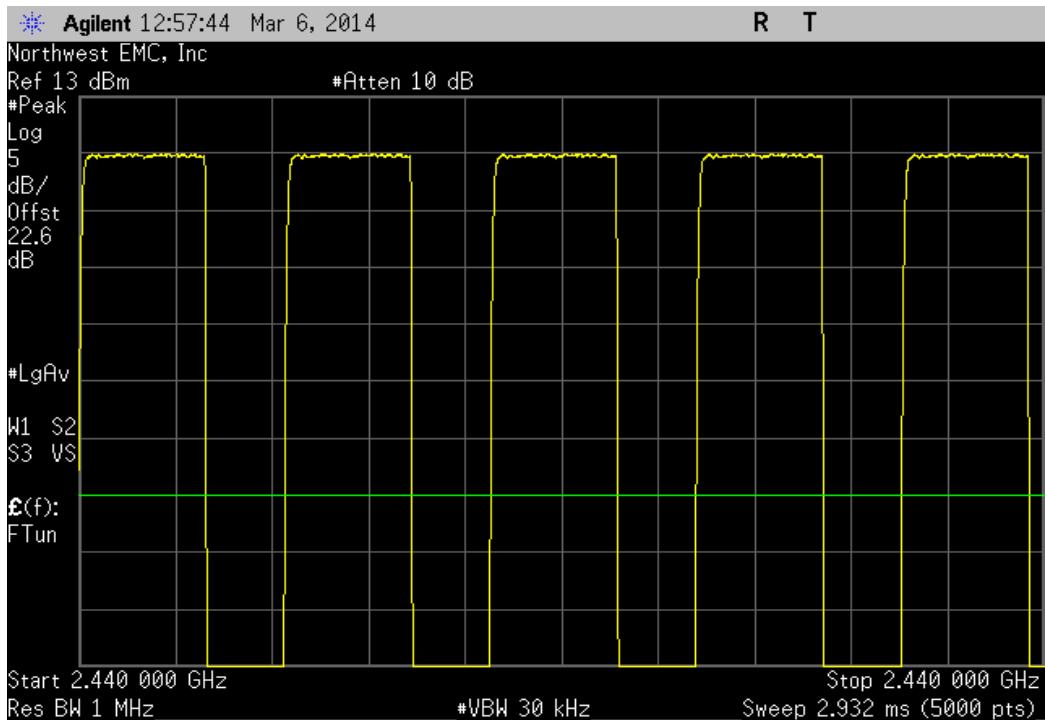

| BLE DATA, High Channel 38, 2478 MHz | | | | | |
|-------------------------------------|--------|------------------|-----------|-------|--------|
| Pulse Width | Period | Number of Pulses | Value (%) | Limit | Result |
| 379 uS | 625 uS | 1 | 60.6 | N/A | N/A |

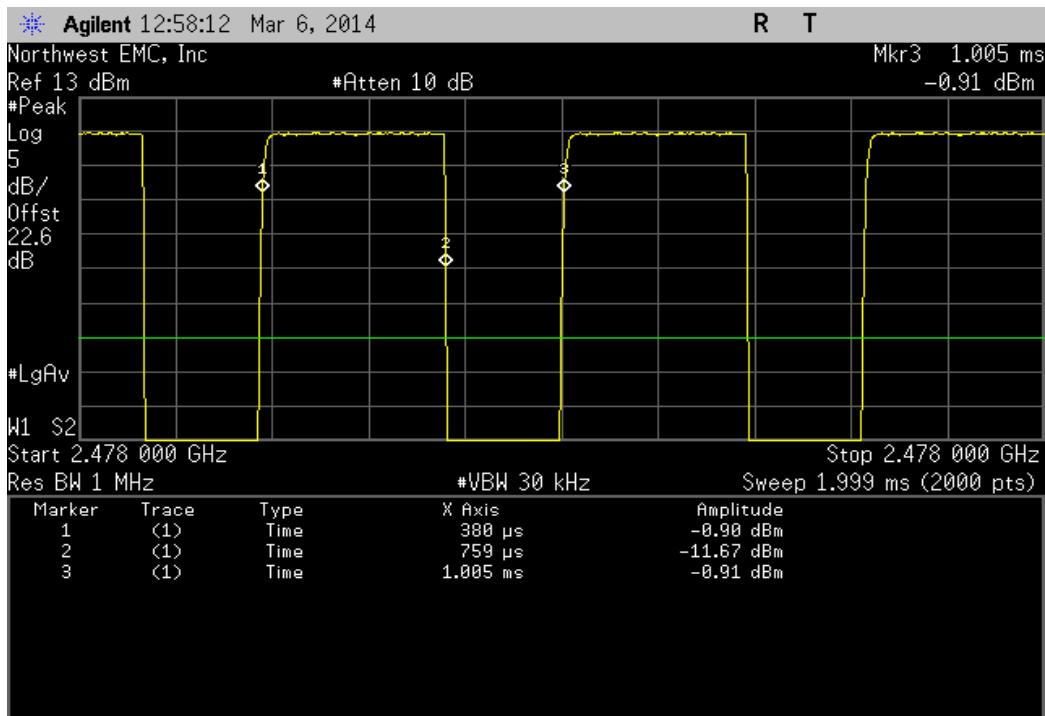

| BLE DATA, High Channel 38, 2478 MHz | | | | | |
|-------------------------------------|--------|------------------|-----------|-------|--------|
| Pulse Width | Period | Number of Pulses | Value (%) | Limit | Result |
| N/A | N/A | 5 | N/A | N/A | N/A |

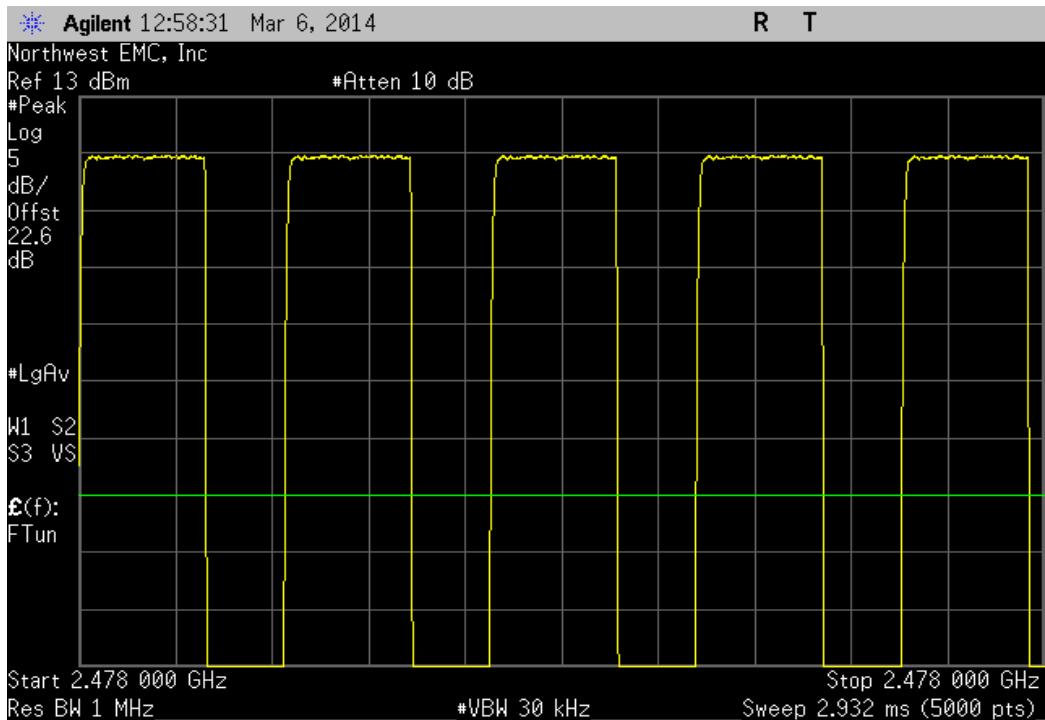

OCCUPIED BANDWIDTH

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT



| Description | Manufacturer | Model | ID | Last Cal. | Interval |
|-------------------|--------------------|------------------|-----|-----------|----------|
| Signal Generator | Agilent | N5183A | TIA | 1/27/2012 | 36 |
| NC02 Cable | ESM Cable Corp. | TTBJ-141 KMKM-72 | NC5 | 7/3/2013 | 12 |
| 40GHz DC Block | Fairview Microwave | SD3379 | AMJ | 7/3/2013 | 12 |
| Attenuator | Fairview Microwave | SA4014-20 | TKE | 2/13/2014 | 12 |
| Spectrum Analyzer | Agilent | E4446A | AAT | 6/28/2012 | 24 |



TEST DESCRIPTION



The 6dB occupied bandwidth was measured using 100 kHz resolution bandwidth and 300 kHz video bandwidth. The 99.9% (approximate 26 dB) emission bandwidth (EBW) was also measured at the same time.

The EUT was set to low, medium and high transmit frequencies. The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at the data rate(s) listed in the datasheet.

| | | | | |
|--|-----------------------|--|------------------|------|
| EUT: | 1631 | Work Order: | MCSO1702 | |
| Serial Number: | 041152140753 | Date: | 03/06/14 | |
| Customer: | Microsoft Corporation | Temperature: | 23°C | |
| Attendees: | None | Humidity: | 40% | |
| Project: | None | Barometric Pres.: | 1001 | |
| Tested by: | Richard Mellroth | Power: | 110 VAC / 60Hz | |
| TEST SPECIFICATIONS | | Test Method | ANSI C63.10:2009 | |
| FCC 15.247:2014 | | | | |
| COMMENTS | | | | |
| Adapter cable loss of 0.75dB added to analyzer reference level offset. | | | | |
| DEVIATIONS FROM TEST STANDARD | | | | |
| None | | | | |
| Configuration # | 1 |  Signature | | |
| | | Value | Limit | |
| BLE ADV | | 689.501 kHz | > 500 kHz | Pass |
| Low Channel 0, 2402 MHz | | 697.034 kHz | > 500 kHz | Pass |
| Mid Channel 12, 2426 MHz | | 701.831 kHz | > 500 kHz | Pass |
| High Channel 39, 2480 MHz | | | | |
| BLE DATA | | 689.668 kHz | > 500 kHz | Pass |
| Low Channel 1, 2404 MHz | | 709.573 kHz | > 500 kHz | Pass |
| Mid Channel 19, 2440 MHz | | 711.389 kHz | > 500 kHz | Pass |
| High Channel 38, 2478 MHz | | | | |

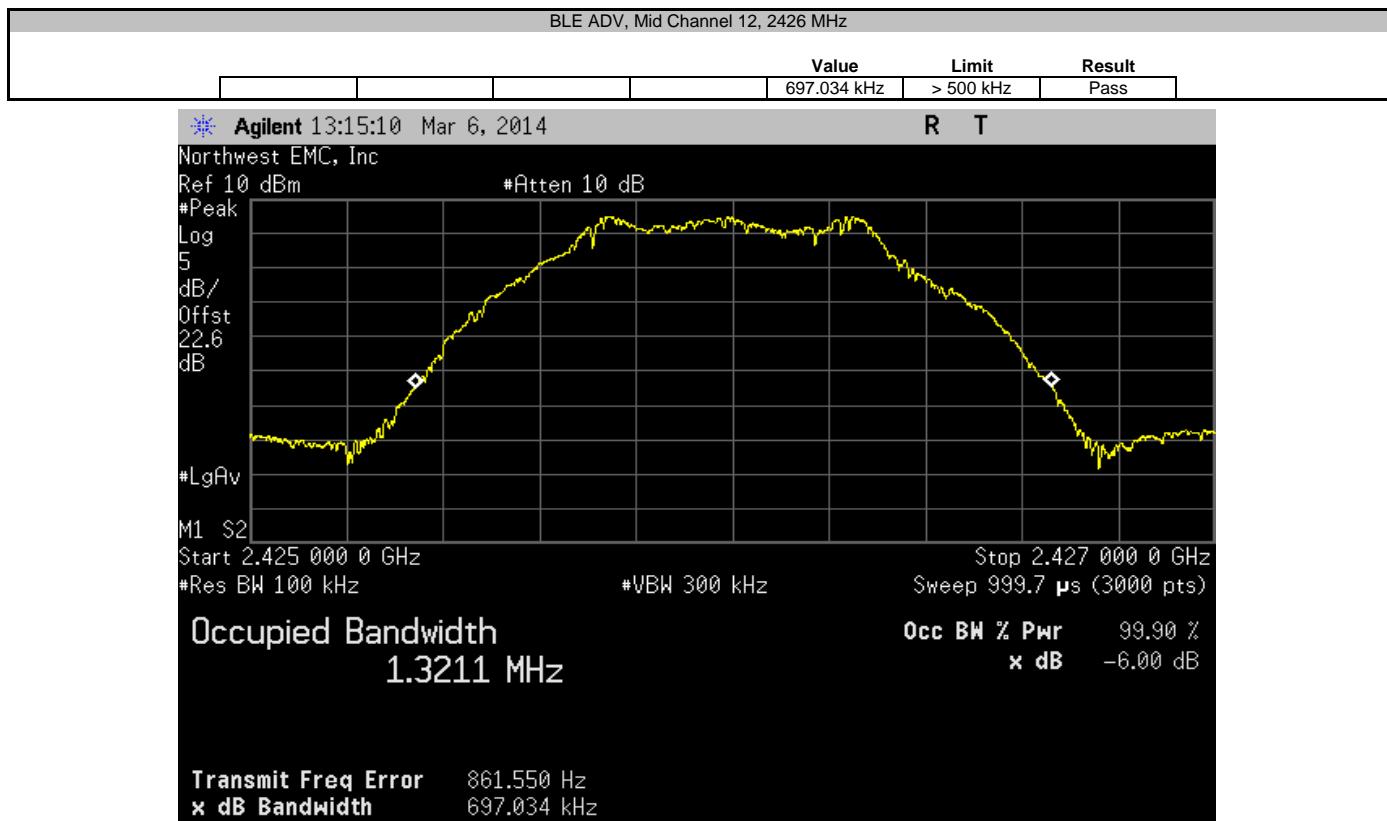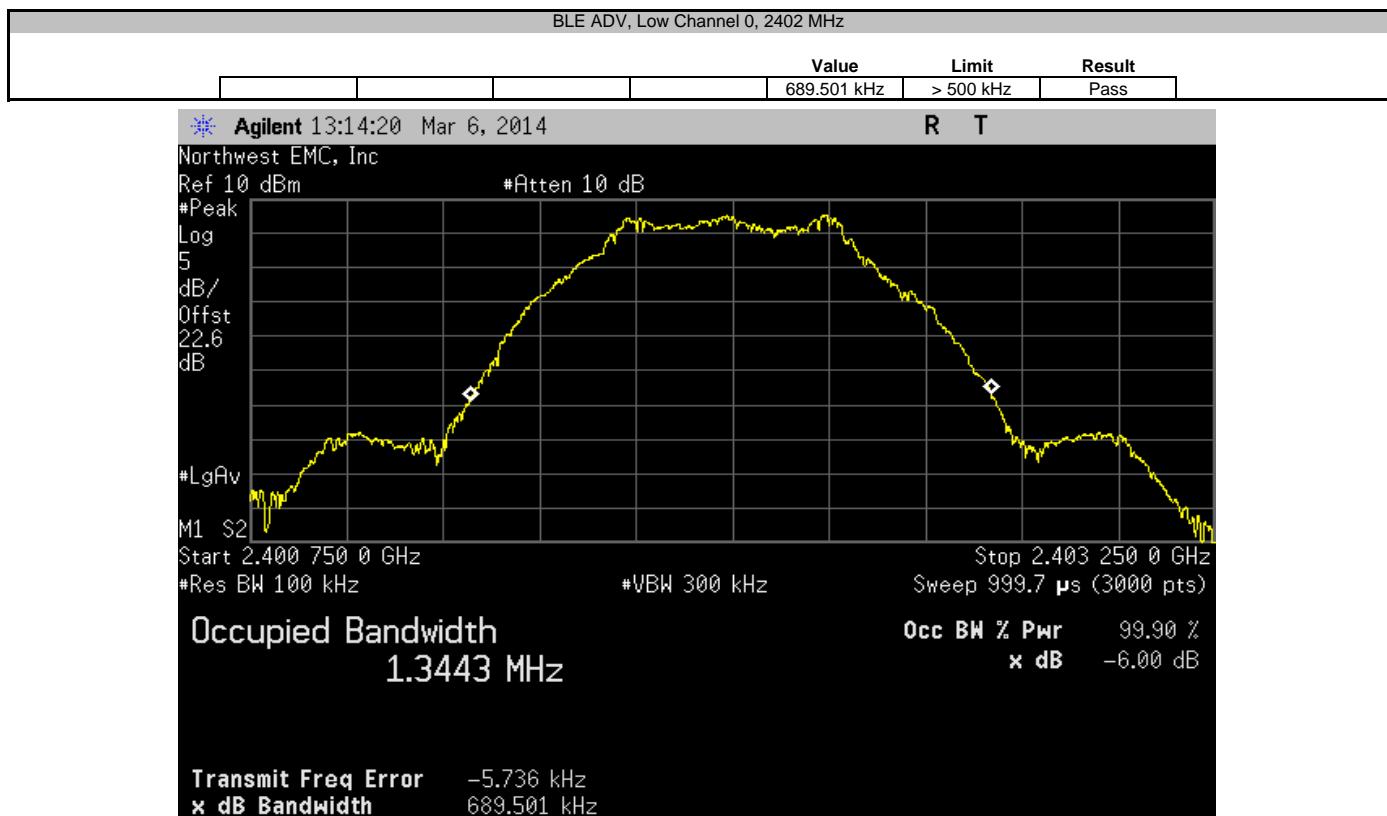

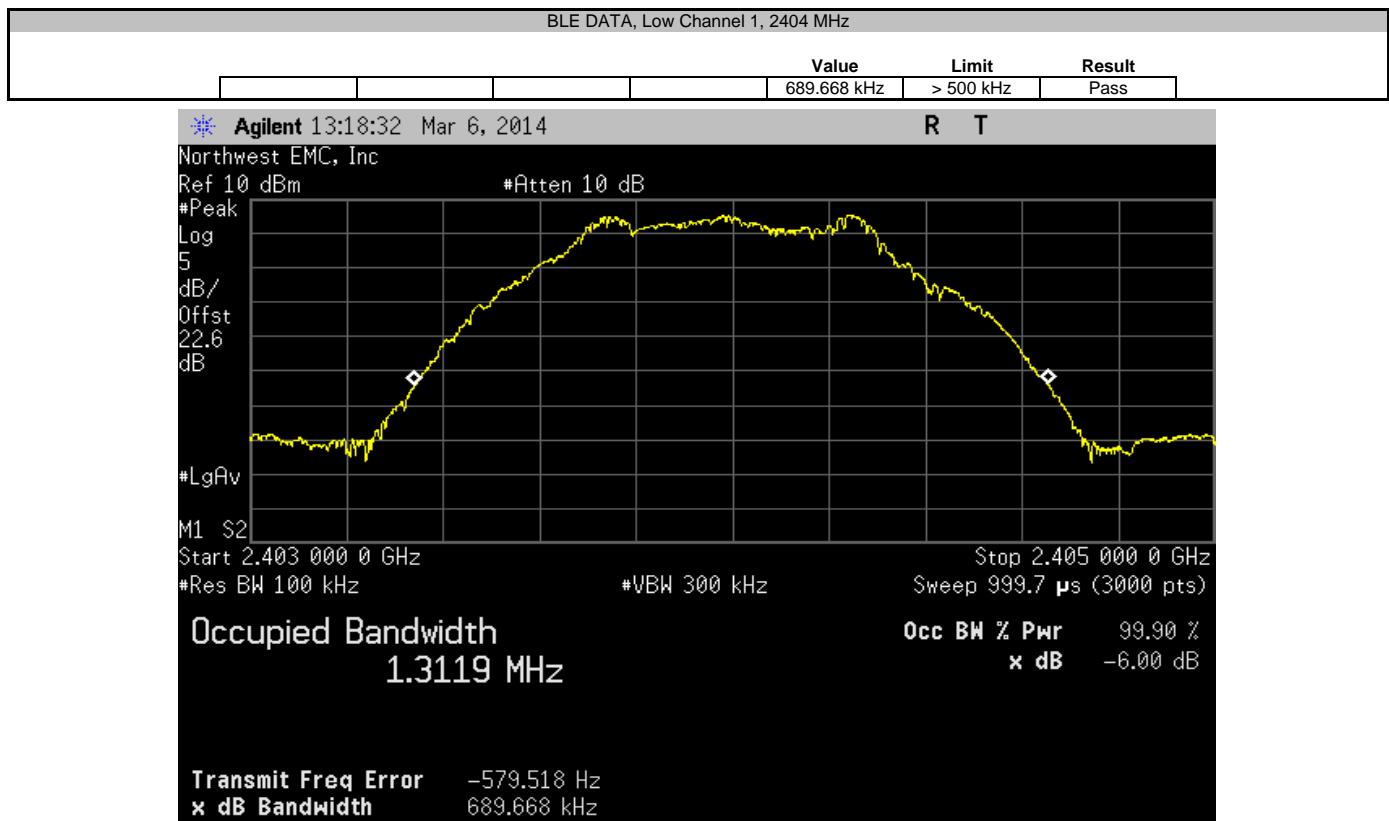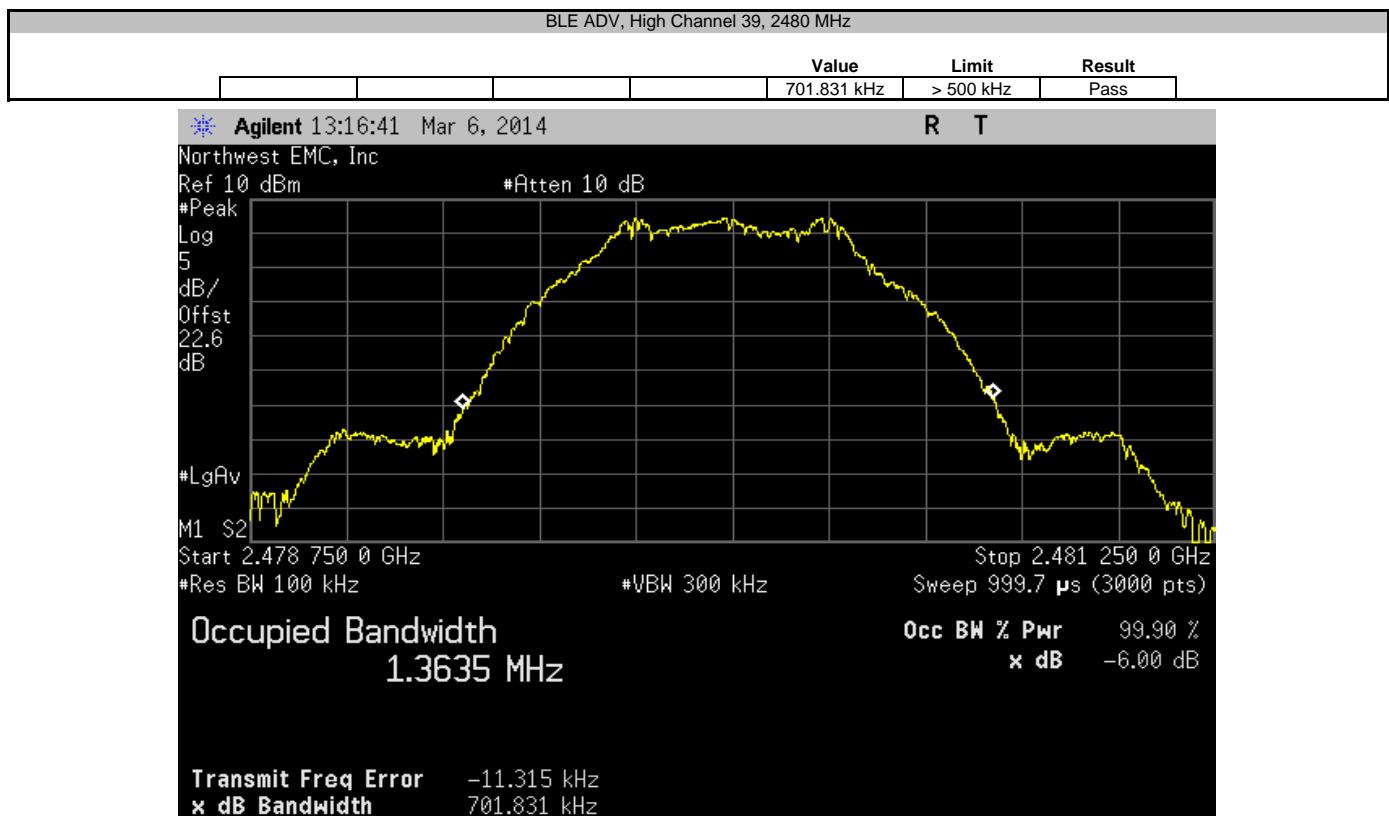

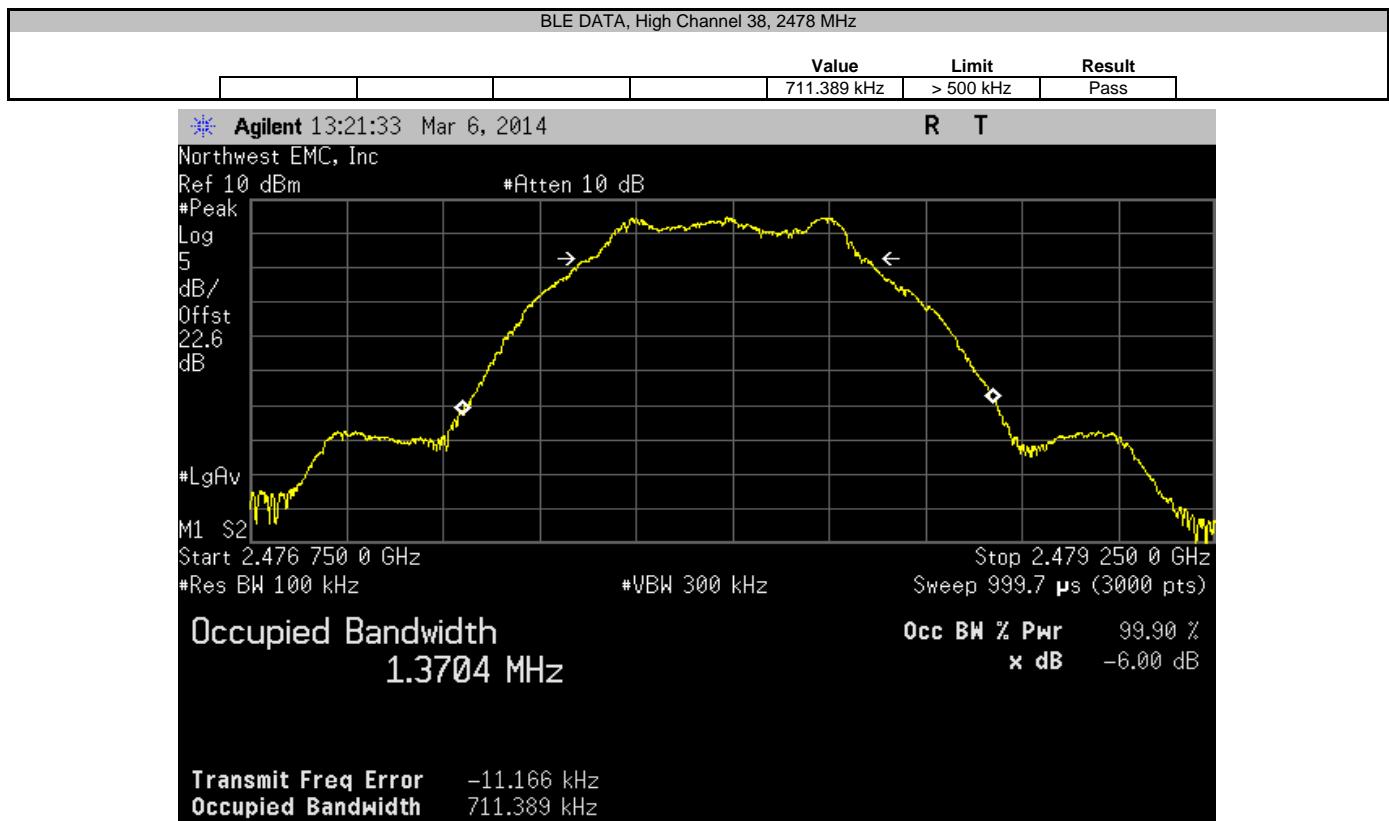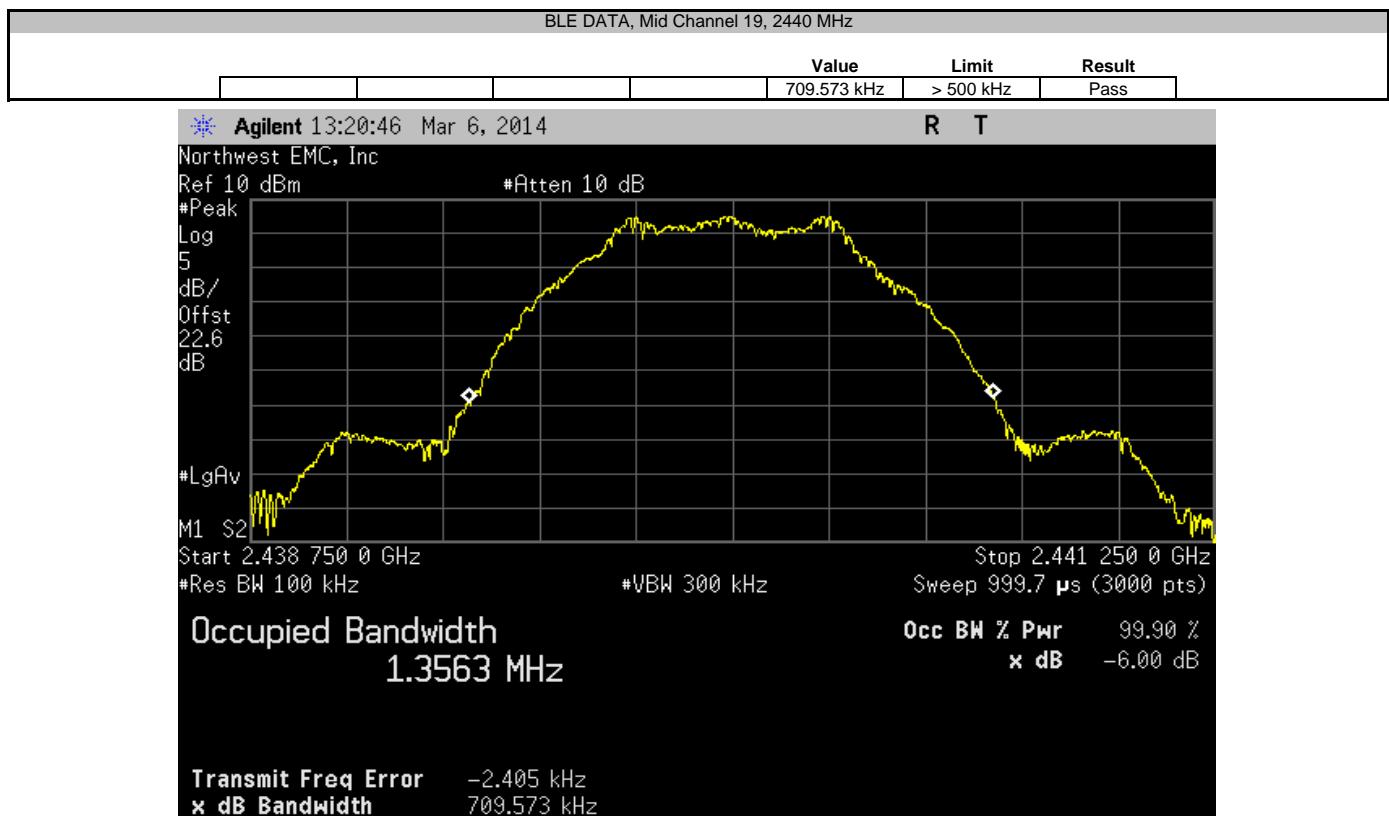

Output Power

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

| Description | Manufacturer | Model | ID | Last Cal. | Interval |
|-------------------|--------------------|------------------|-----|-----------|----------|
| Signal Generator | Agilent | N5183A | TIA | 1/27/2012 | 36 |
| NC02 Cable | ESM Cable Corp. | TTBJ-141 KMKM-72 | NC5 | 7/3/2013 | 12 |
| 40GHz DC Block | Fairview Microwave | SD3379 | AMJ | 7/3/2013 | 12 |
| Attenuator | Fairview Microwave | SA4014-20 | TKE | 2/13/2014 | 12 |
| Spectrum Analyzer | Agilent | E4446A | AAT | 6/28/2012 | 24 |

TEST DESCRIPTION

The transmit frequency was set to the required channels in each band. The transmit power was set to its default maximum. A direct connection was made between the RF output of the EUT and a spectrum analyzer. Attenuation and a DC block were used. The reference level offset on the spectrum analyzer was adjusted to compensate for cable loss and the external attenuation used between the RF output and the spectrum analyzer input.

Method Option 1 found in KDB 558074 DTS D01 Measurement Section 8.1.1 was used because the RBW on the analyzer was greater than the Emission Bandwidth of the radio.

De Facto EIRP Limit: Per 47 CFR 15.247 (b)(1-3), the EUT meets the de facto EIRP limit of +36 dBm.




Output Power


XMit 2013.08.15
PsaTx 2013.10.23

| EUT: 1631 | Work Order: MCSO1702 | | |
|--|-------------------------------|-------|--------|
| Serial Number: 041152140753 | Date: 03/06/14 | | |
| Customer: Microsoft Corporation | Temperature: 23°C | | |
| Attendees: None | Humidity: 40% | | |
| Project: None | Barometric Pres.: 1001 | | |
| Tested by: Richard Mellroth | Job Site: NC06 | | |
| TEST SPECIFICATIONS | | | |
| FCC 15.247:2014 | Test Method: ANSI C63.10:2009 | | |
| COMMENTS | | | |
| Adapter cable loss of 0.75dB added to analyzer reference level offset. | | | |
| DEVIATIONS FROM TEST STANDARD | | | |
| None | | | |
| Configuration # | 1 | | |
| Signature: | | | |
| | Value | Limit | Result |
| BLE ADV | | | |
| Low Channel 0, 2402 MHz | 7.073 mW | < 1 W | Pass |
| Mid Channel 12, 2426 MHz | 6.942 mW | < 1 W | Pass |
| High Channel 39, 2480 MHz | 6.616 mW | < 1 W | Pass |
| BLE DATA | | | |
| Low Channel 1, 2404 MHz | 7.058 mW | < 1 W | Pass |
| Mid Channel 19, 2440 MHz | 6.856 mW | < 1 W | Pass |
| High Channel 38, 2478 MHz | 6.662 mW | < 1 W | Pass |


| BLE ADV, Low Channel 0, 2402 MHz | | | | Value | Limit | Result |
|----------------------------------|--|--|--|----------|-------|--------|
| | | | | 7.073 mW | < 1 W | Pass |

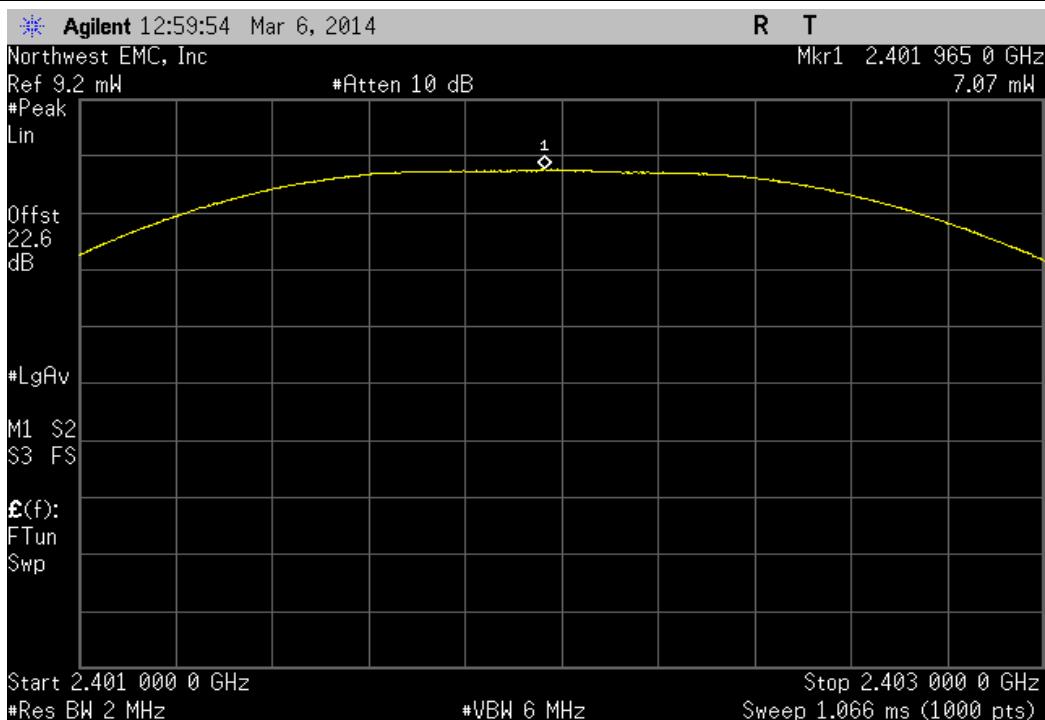


| BLE ADV, Mid Channel 12, 2426 MHz | | | | Value | Limit | Result |
|-----------------------------------|--|--|--|----------|-------|--------|
| | | | | 6.942 mW | < 1 W | Pass |

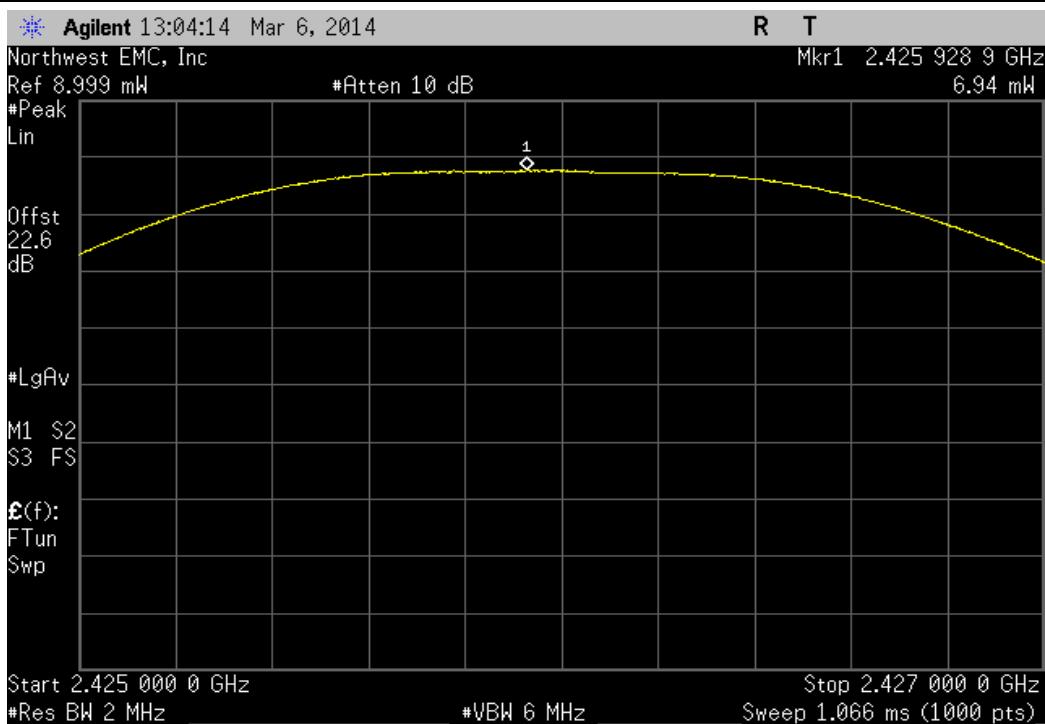


| BLE ADV, High Channel 39, 2480 MHz | | | | Value | Limit | Result |
|------------------------------------|--|--|--|----------|-------|--------|
| | | | | 6.616 mW | < 1 W | Pass |

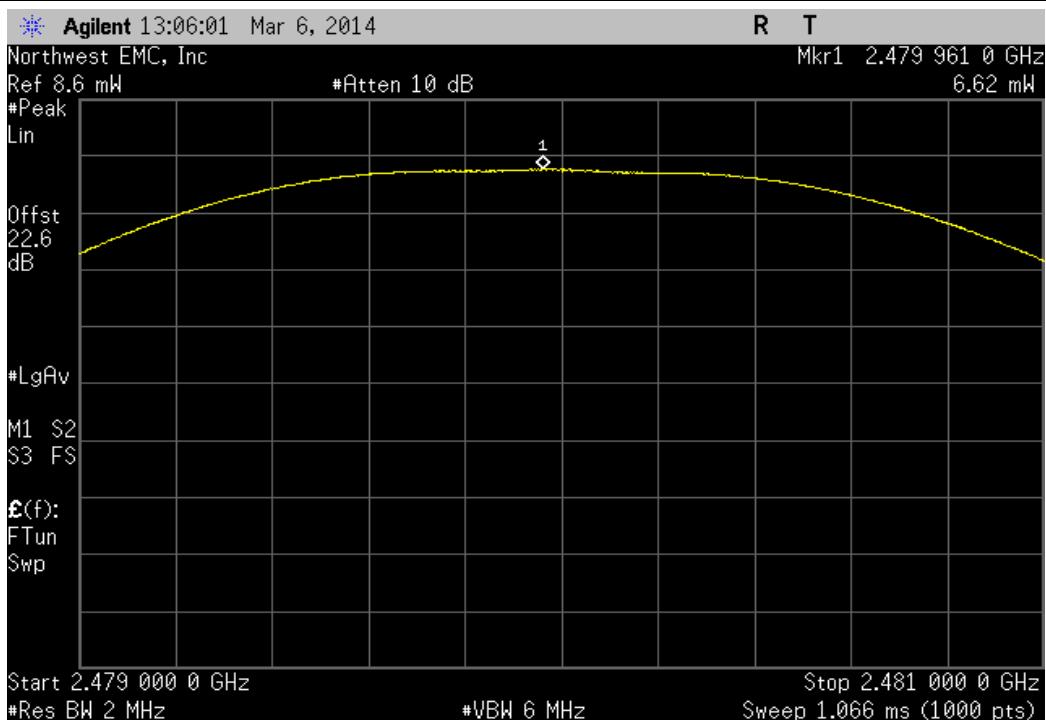


| BLE DATA, Low Channel 1, 2404 MHz | | | | Value | Limit | Result |
|-----------------------------------|--|--|--|----------|-------|--------|
| | | | | 7.058 mW | < 1 W | Pass |

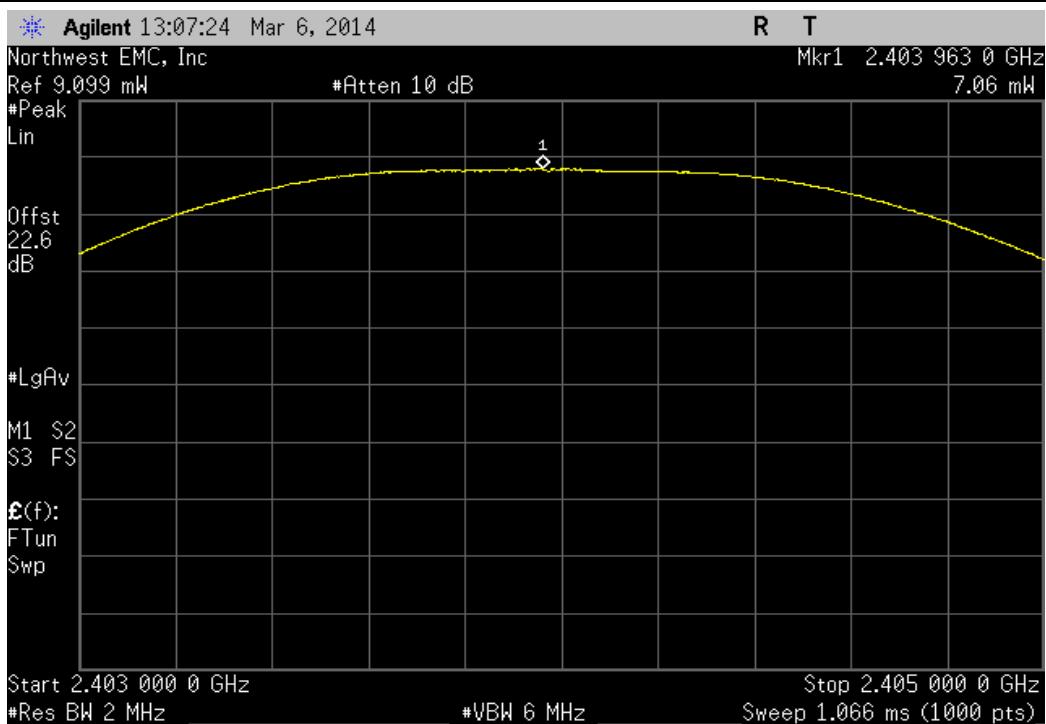

| BLE DATA, Mid Channel 19, 2440 MHz | | | | Value | Limit | Result |
|------------------------------------|--|--|--|----------|-------|--------|
| | | | | 6.856 mW | < 1 W | Pass |

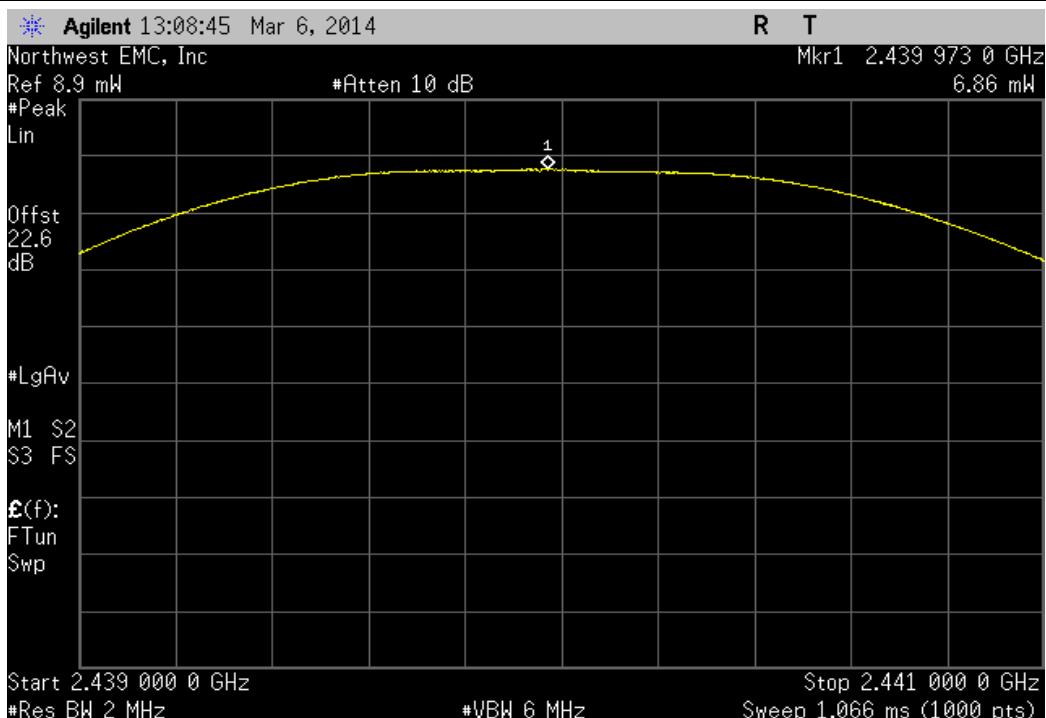

| BLE DATA, High Channel 38, 2478 MHz | | | | Value | Limit | Result |
|-------------------------------------|--|--|--|----------|-------|--------|
| | | | | 6.662 mW | < 1 W | Pass |

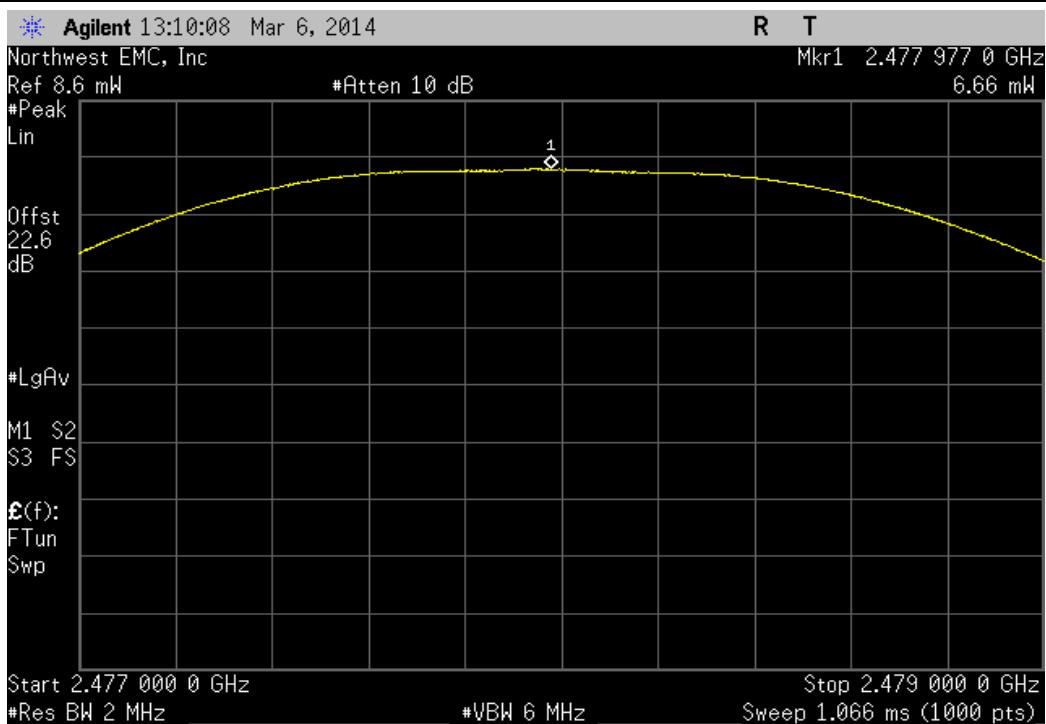

POWER SPECTRAL DENSITY

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

| Description | Manufacturer | Model | ID | Last Cal. | Interval |
|-------------------|--------------------|------------------|-----|-----------|----------|
| Signal Generator | Agilent | N5183A | TIA | 1/27/2012 | 36 |
| NC02 Cable | ESM Cable Corp. | TTBJ-141 KMKM-72 | NC5 | 7/3/2013 | 12 |
| 40GHz DC Block | Fairview Microwave | SD3379 | AMJ | 7/3/2013 | 12 |
| Attenuator | Fairview Microwave | SA4014-20 | TKE | 2/13/2014 | 12 |
| Spectrum Analyzer | Agilent | E4446A | AAT | 6/28/2012 | 24 |

TEST DESCRIPTION

The maximum power spectral density measurements were measured with the EUT set to the required transmit frequencies in each band. The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at the lowest, middle, and maximum data rate for each modulation type available.

Per the procedure outlined in FCC KDB 558074 D01 DTS Measurement Section 5.3.1, the spectrum analyzer was used as follows:


- RBW = 100 kHz
- VBW = 300 kHz
- Detector = Peak (to match method used for power measurement)
- Trace = Max hold

The observed power level is then scaled to an equivalent value in 3 kHz by adding a Bandwidth Correction Factor (BWCF) where:


$$\text{BWCF} = 10 \cdot \log (3 \text{ kHz} / 100 \text{ kHz}) = -15.2 \text{ dB}$$

| EUT: 1631 | Work Order: MCSO1702 | | | | | |
|--|-------------------------------|--|---------------------------|-------------------|-------------------|--------|
| Serial Number: 041152140753 | Date: 03/06/14 | | | | | |
| Customer: Microsoft Corporation | Temperature: 23°C | | | | | |
| Attendees: None | Humidity: 40% | | | | | |
| Project: None | Barometric Pres.: 1001 | | | | | |
| Tested by: Richard Mellroth | Job Site: NC06 | | | | | |
| TEST SPECIFICATIONS | | | | | | |
| FCC 15.247:2014 | Test Method: ANSI C63.10:2009 | | | | | |
| COMMENTS | | | | | | |
| Adapter cable loss of 0.75dB added to analyzer reference level offset. | | | | | | |
| DEVIATIONS FROM TEST STANDARD | | | | | | |
| None | | | | | | |
| Configuration # | 1 | Signature:  | | | | |
| | | Value dBm/100kHz | dBm/100kHz To dBm/3kHz | Value dBm/3kHz | Limit dBm/3kHz | Result |
| BLE ADV | | | | | | |
| Low Channel 0, 2402 MHz | | 7.795 | -15.2 | -7.405 | 8 | Pass |
| Mid Channel 12, 2426 MHz | | 7.717 | -15.2 | -7.483 | 8 | Pass |
| High Channel 39, 2480 MHz | | 7.524 | -15.2 | -7.676 | 8 | Pass |
| BLE DATA | | | | | | |
| Low Channel 1, 2404 MHz | | 7.81 | -15.2 | -7.39 | 8 | Pass |
| Mid Channel 19, 2440 MHz | | 7.674 | -15.2 | -7.526 | 8 | Pass |
| High Channel 38, 2478 MHz | | 7.531 | -15.2 | -7.669 | 8 | Pass |


| BLE ADV, Low Channel 0, 2402 MHz | | | | | |
|----------------------------------|-------------|----------|----------|--------|------|
| Value | dBm/100kHz | Value | Limit | | |
| dBm/100kHz | To dBm/3kHz | dBm/3kHz | dBm/3kHz | Result | |
| | 7.795 | -15.2 | -7.405 | 8 | Pass |

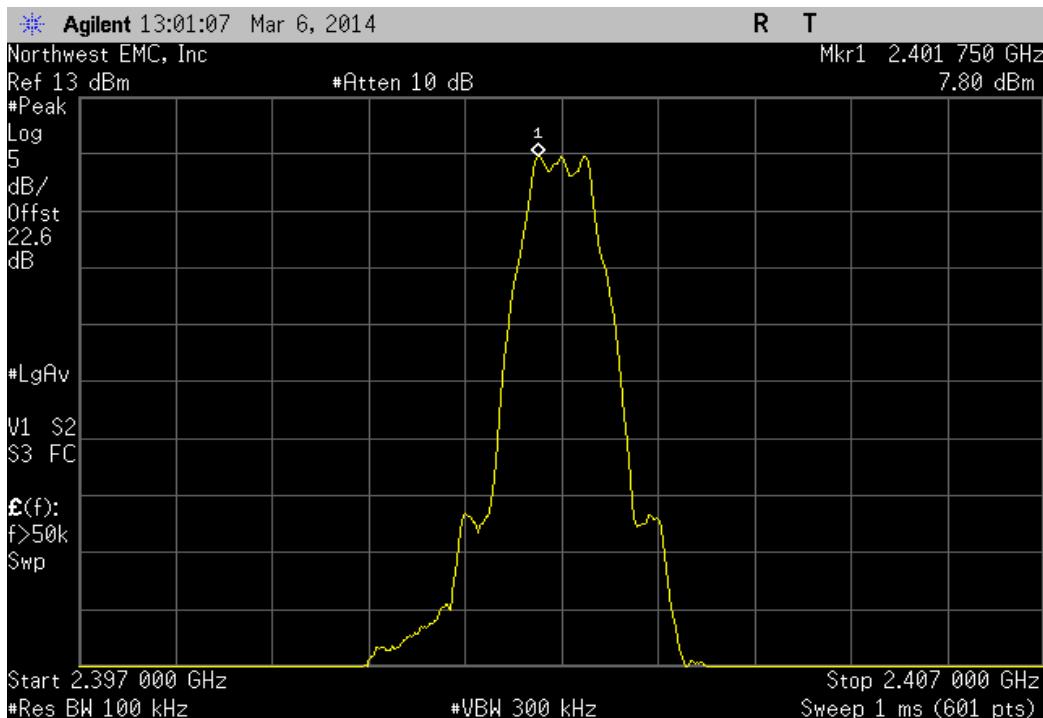


| BLE ADV, Mid Channel 12, 2426 MHz | | | | | |
|-----------------------------------|-------------|----------|----------|--------|------|
| Value | dBm/100kHz | Value | Limit | | |
| dBm/100kHz | To dBm/3kHz | dBm/3kHz | dBm/3kHz | Result | |
| | 7.717 | -15.2 | -7.483 | 8 | Pass |

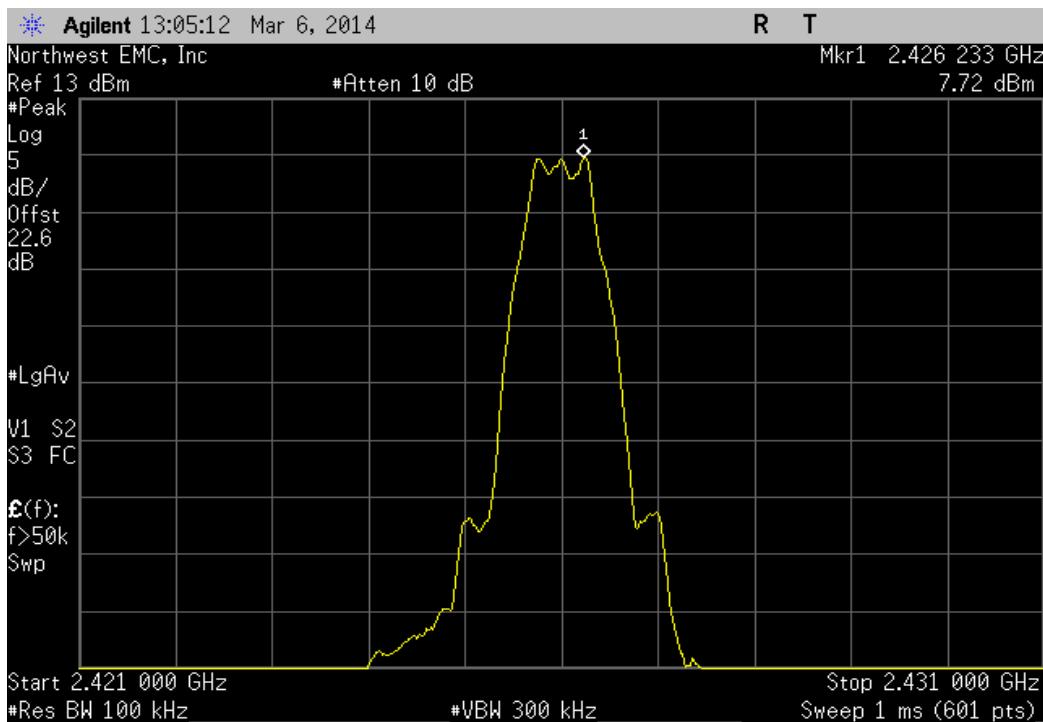


| BLE ADV, High Channel 39, 2480 MHz | | | | | |
|------------------------------------|-------------|----------|----------|---|--------|
| Value | dBm/100kHz | Value | Limit | | |
| dBm/100kHz | To dBm/3kHz | dBm/3kHz | dBm/3kHz | | Result |
| | 7.524 | -15.2 | -7.676 | 8 | Pass |

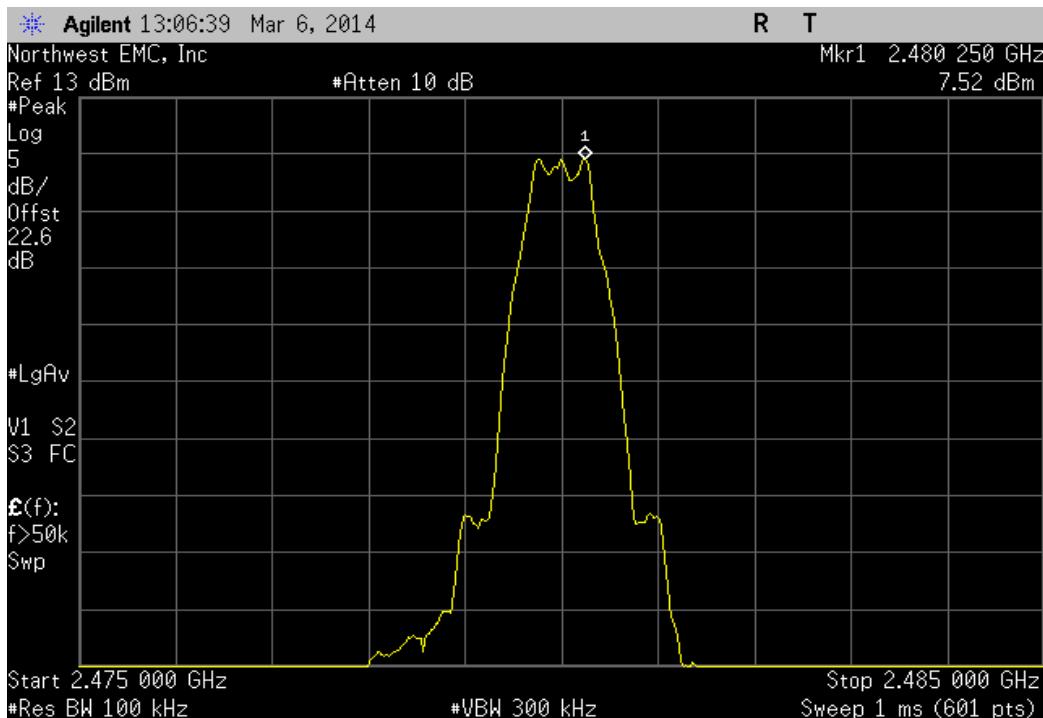


| BLE DATA, Low Channel 1, 2404 MHz | | | | | |
|-----------------------------------|-------------|----------|----------|---|--------|
| Value | dBm/100kHz | Value | Limit | | |
| dBm/100kHz | To dBm/3kHz | dBm/3kHz | dBm/3kHz | | Result |
| | 7.81 | -15.2 | -7.39 | 8 | Pass |

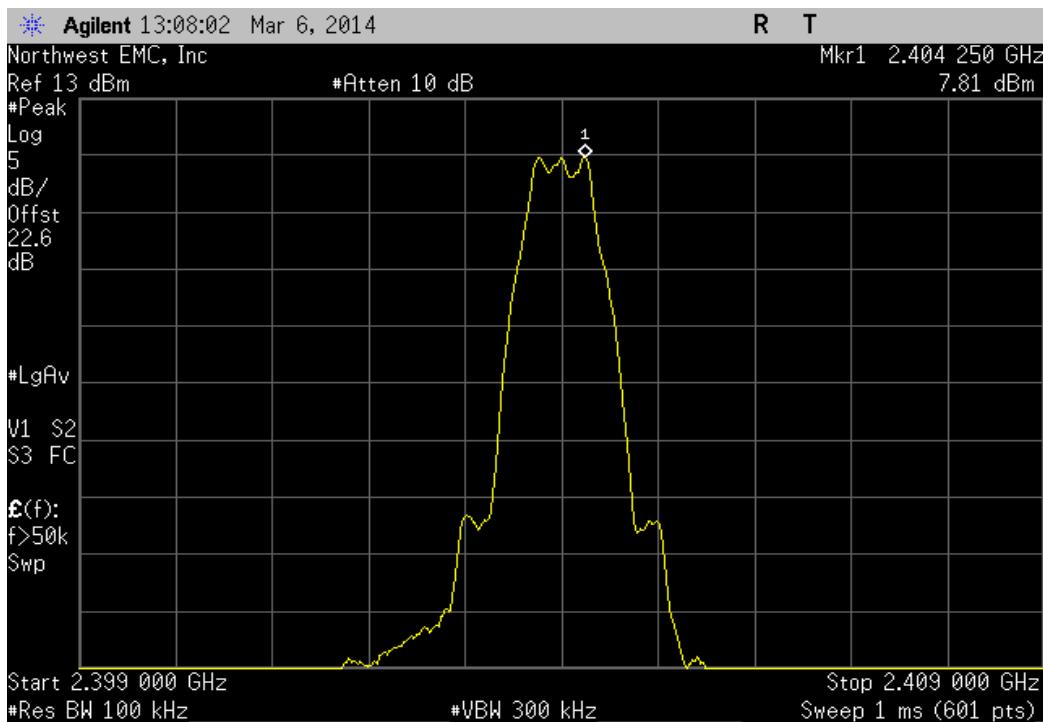

| BLE DATA, Mid Channel 19, 2440 MHz | | | | | |
|------------------------------------|-------------|----------|----------|---|--------|
| Value | dBm/100kHz | Value | Limit | | |
| dBm/100kHz | To dBm/3kHz | dBm/3kHz | dBm/3kHz | | Result |
| | 7.674 | -15.2 | -7.526 | 8 | Pass |

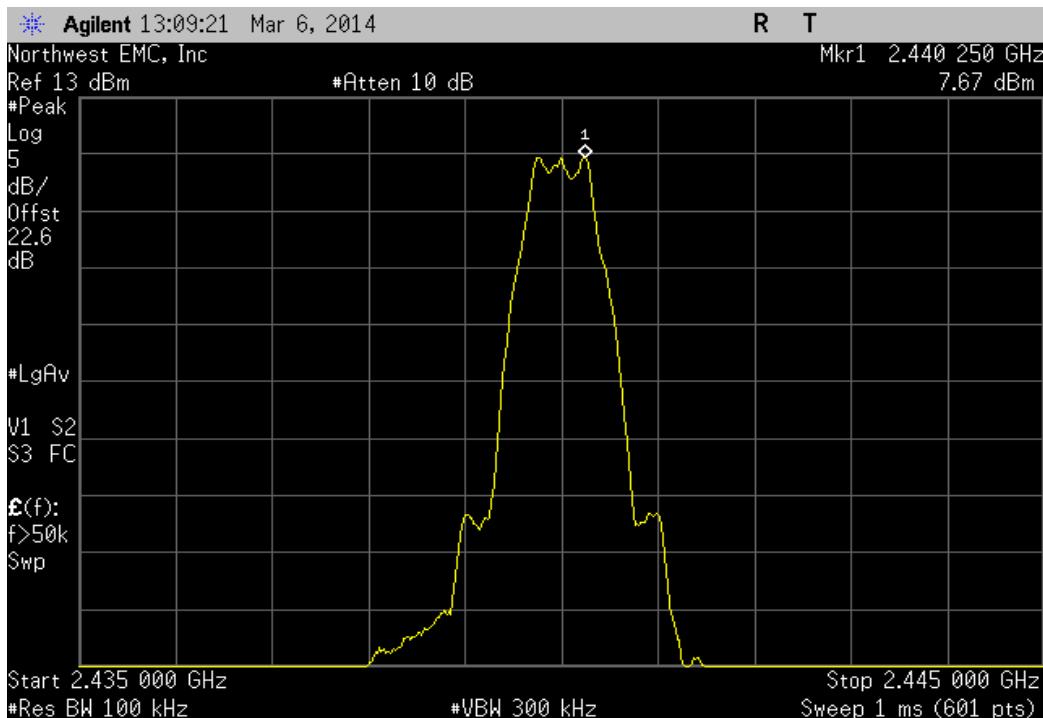

| BLE DATA, High Channel 38, 2478 MHz | | | | | |
|-------------------------------------|-------------|----------|----------|---|--------|
| Value | dBm/100kHz | Value | Limit | | |
| dBm/100kHz | To dBm/3kHz | dBm/3kHz | dBm/3kHz | | Result |
| | 7.531 | -15.2 | -7.669 | 8 | Pass |

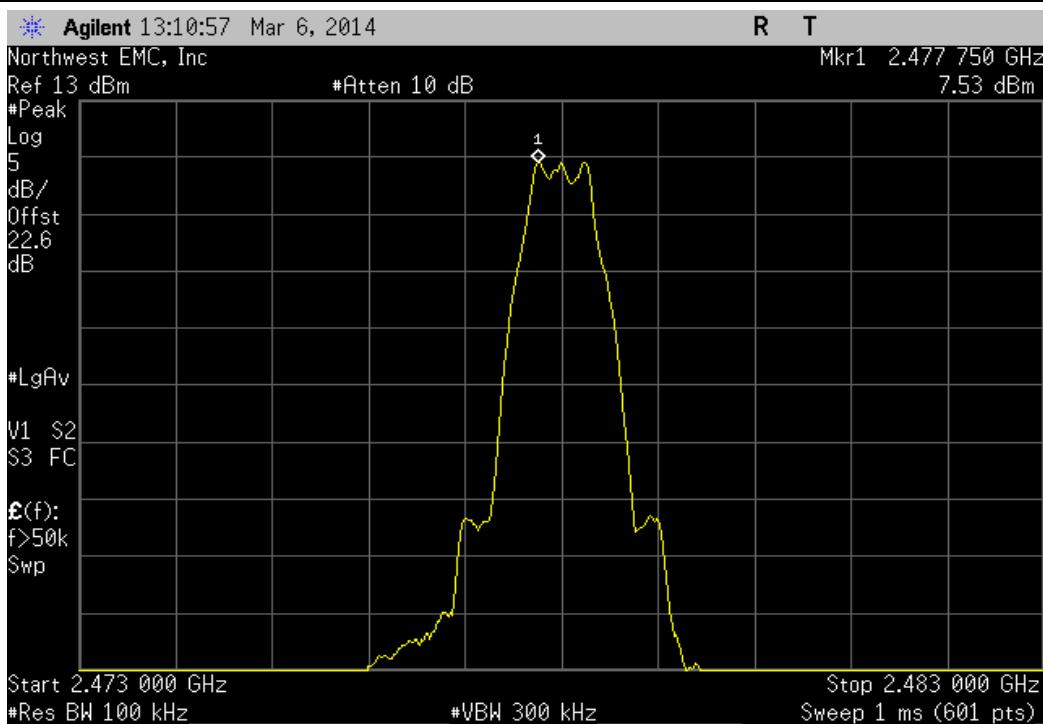

BAND EDGE COMPLIANCE

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

| Description | Manufacturer | Model | ID | Last Cal. | Interval |
|-------------------|--------------------|------------------|-----|-----------|----------|
| Signal Generator | Agilent | N5183A | TIA | 1/27/2012 | 36 |
| NC02 Cable | ESM Cable Corp. | TTBJ-141 KMKM-72 | NC5 | 7/3/2013 | 12 |
| 40GHz DC Block | Fairview Microwave | SD3379 | AMJ | 7/3/2013 | 12 |
| Attenuator | Fairview Microwave | SA4014-20 | TKE | 2/13/2014 | 12 |
| Spectrum Analyzer | Agilent | E4446A | AAT | 6/28/2012 | 24 |


TEST DESCRIPTION

The spurious RF conducted emissions at the edges of the authorized bands were measured with the EUT set to low and high transmit frequencies in each available band. The channels closest to the band edges were selected. The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at the data rate(s) listed in the datasheet.


The spectrum was scanned below the lower band edge and above the higher band edge.

| EUT: 1631 | Work Order: MCSO1702 | | | |
|---|-------------------------------|------------|-----------|------|
| Serial Number: 041152140753 | Date: 03/06/14 | | | |
| Customer: Microsoft Corporation | Temperature: 23°C | | | |
| Attendees: None | Humidity: 40% | | | |
| Project: None | Barometric Pres.: 1001 | | | |
| Tested by: Richard Mellroth | Job Site: NC06 | | | |
| TEST SPECIFICATIONS | | | | |
| FCC 15.247:2014 | Test Method: ANSI C63.10:2009 | | | |
| COMMENTS | | | | |
| Adapter cable loss of 0.75dB added to analyzer reference level offset. | | | | |
| DEVIATIONS FROM TEST STANDARD | | | | |
| None | | | | |
| Configuration # | 1 | | | |
| Signature  | | | | |
| | Value | Limit | Result | |
| BLE ADV | | | | |
| Low Channel 0, 2402 MHz | | -44.36 dBc | ≤ -20 dBc | Pass |
| High Channel 39, 2480 MHz | | -51.31 dBc | ≤ -20 dBc | Pass |
| BLE DATA | | | | |
| Low Channel 1, 2404 MHz | | -51.17 dBc | ≤ -20 dBc | Pass |
| High Channel 38, 2478 MHz | | -54.49 dBc | ≤ -20 dBc | Pass |


| BLE ADV, Low Channel 0, 2402 MHz | | | | Value | Limit | Result |
|----------------------------------|--|--|--|------------|-----------|--------|
| | | | | -44.36 dBc | ≤ -20 dBc | Pass |

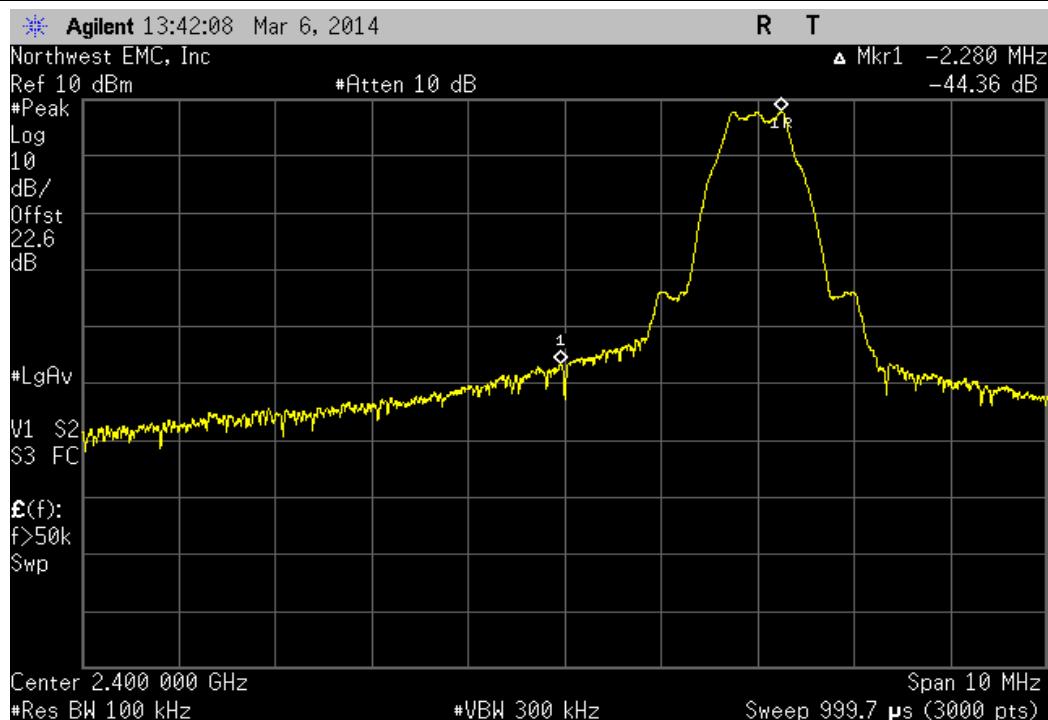


| BLE ADV, High Channel 39, 2480 MHz | | | | Value | Limit | Result |
|------------------------------------|--|--|--|------------|-----------|--------|
| | | | | -51.31 dBc | ≤ -20 dBc | Pass |

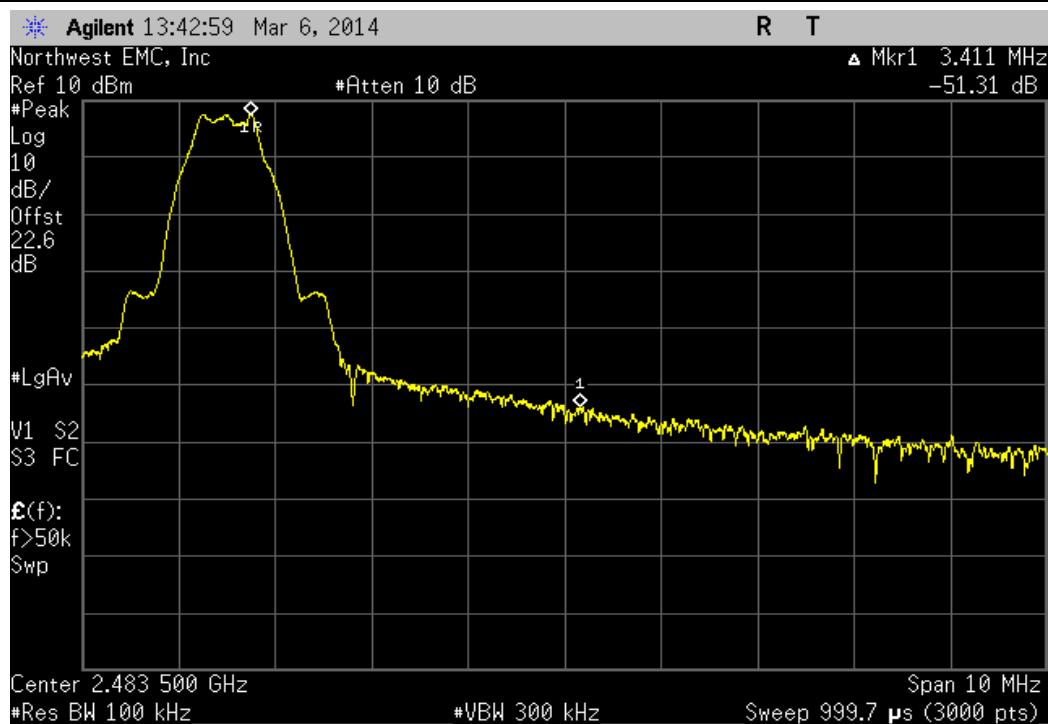

| BLE DATA, Low Channel 1, 2404 MHz | | | | Value | Limit | Result |
|-----------------------------------|--|--|--|------------|-----------|--------|
| | | | | -51.17 dBc | ≤ -20 dBc | Pass |

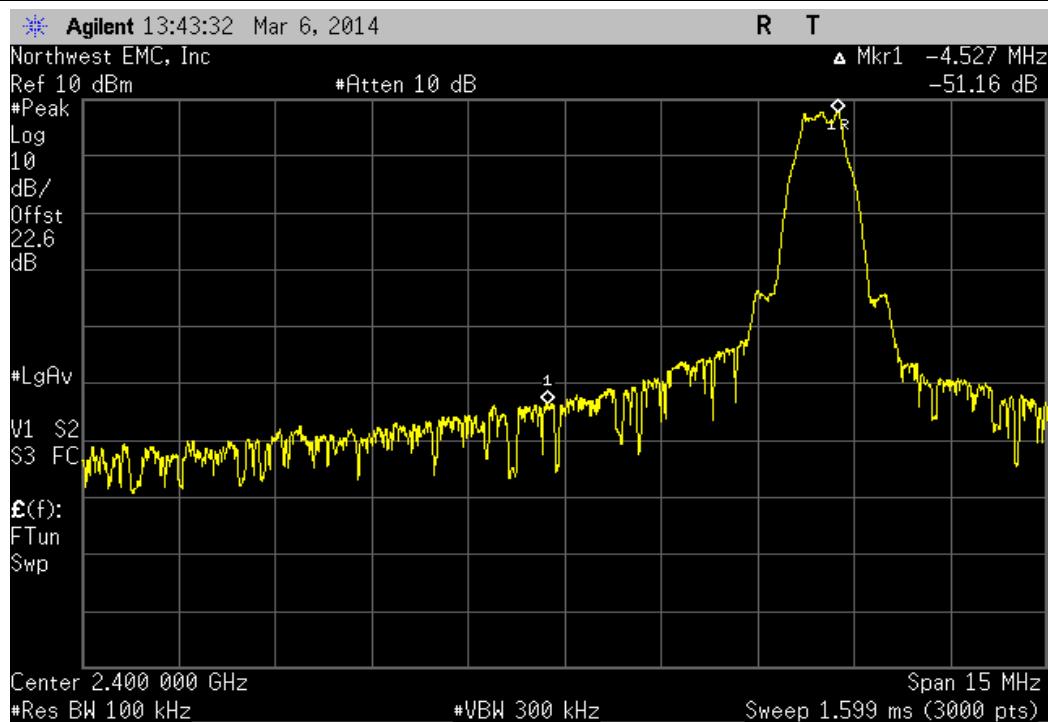

| BLE DATA, High Channel 38, 2478 MHz | | | | Value | Limit | Result |
|-------------------------------------|--|--|--|------------|-----------|--------|
| | | | | -54.49 dBc | ≤ -20 dBc | Pass |

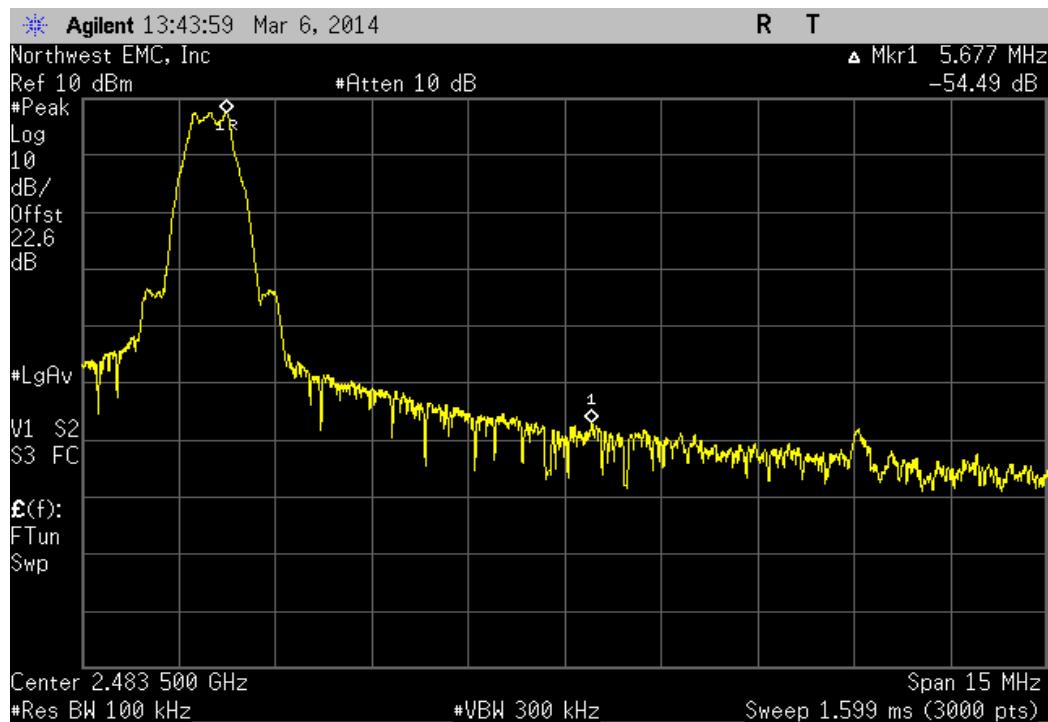

SPURIOUS CONDUCTED EMISSIONS

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.



TEST EQUIPMENT

| Description | Manufacturer | Model | ID | Last Cal. | Interval |
|-------------------|--------------------|------------------|-----|-----------|----------|
| Signal Generator | Agilent | N5183A | TIA | 1/27/2012 | 36 |
| NC02 Cable | ESM Cable Corp. | TTBJ-141 KMKM-72 | NC5 | 7/3/2013 | 12 |
| 40GHz DC Block | Fairview Microwave | SD3379 | AMJ | 7/3/2013 | 12 |
| Attenuator | Fairview Microwave | SA4014-20 | TKE | 2/13/2014 | 12 |
| Spectrum Analyzer | Agilent | E4446A | AAT | 6/28/2012 | 24 |


TEST DESCRIPTION

The spurious RF conducted emissions were measured with the EUT set to low, medium and high transmit frequencies. The measurements were made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at the data rate(s) listed in the datasheet. For each transmit frequency, the spectrum was scanned throughout the specified frequency range.


| EUT: 1631 | Work Order: MCSO1702 | | | | |
|--|-------------------------------|--|------------|-----------|--------|
| Serial Number: 041152140753 | Date: 03/06/14 | | | | |
| Customer: Microsoft Corporation | Temperature: 23°C | | | | |
| Attendees: None | Humidity: 40% | | | | |
| Project: None | Barometric Pres.: 1001 | | | | |
| Tested by: Richard Mellroth | Job Site: NC06 | | | | |
| TEST SPECIFICATIONS | | | | | |
| FCC 15.247:2014 | Test Method: ANSI C63.10:2009 | | | | |
| COMMENTS | | | | | |
| Adapter cable loss of 0.75dB added to analyzer reference level offset. | | | | | |
| DEVIATIONS FROM TEST STANDARD | | | | | |
| None | | | | | |
| Configuration # | 1 | Signature:  | | | |
| | | Frequency Range | Value | Limit | Result |
| BLE ADV | | | | | |
| Low Channel 0, 2402 MHz | | Fundamental | N/A | N/A | N/A |
| Low Channel 0, 2402 MHz | | 30 MHz - 12.5 GHz | -51.4 dBc | ≤ -20 dBc | Pass |
| Low Channel 0, 2402 MHz | | 12.5 GHz - 25 GHz | -55.1 dBc | ≤ -20 dBc | Pass |
| Mid Channel 12, 2426 MHz | | Fundamental | N/A | N/A | N/A |
| Mid Channel 12, 2426 MHz | | 30 MHz - 12.5 GHz | -61.45 dBc | ≤ -20 dBc | Pass |
| Mid Channel 12, 2426 MHz | | 12.5 GHz - 25 GHz | -55.45 dBc | ≤ -20 dBc | Pass |
| High Channel 39, 2480 MHz | | Fundamental | N/A | N/A | N/A |
| High Channel 39, 2480 MHz | | 30 MHz - 12.5 GHz | -56.14 dBc | ≤ -20 dBc | Pass |
| High Channel 39, 2480 MHz | | 12.5 GHz - 25 GHz | -55.76 dBc | ≤ -20 dBc | Pass |
| BLE DATA | | | | | |
| Low Channel 1, 2404 MHz | | Fundamental | N/A | N/A | N/A |
| Low Channel 1, 2404 MHz | | 30 MHz - 12.5 GHz | -56.82 dBc | ≤ -20 dBc | Pass |
| Low Channel 1, 2404 MHz | | 12.5 GHz - 25 GHz | -55.86 dBc | ≤ -20 dBc | Pass |
| Mid Channel 19, 2440 MHz | | Fundamental | N/A | N/A | N/A |
| Mid Channel 19, 2440 MHz | | 30 MHz - 12.5 GHz | -60.9 dBc | ≤ -20 dBc | Pass |
| Mid Channel 19, 2440 MHz | | 12.5 GHz - 25 GHz | -55.77 dBc | ≤ -20 dBc | Pass |
| High Channel 38, 2478 MHz | | Fundamental | N/A | N/A | N/A |
| High Channel 38, 2478 MHz | | 30 MHz - 12.5 GHz | -56.04 dBc | ≤ -20 dBc | Pass |
| High Channel 38, 2478 MHz | | 12.5 GHz - 25 GHz | -55.11 dBc | ≤ -20 dBc | Pass |

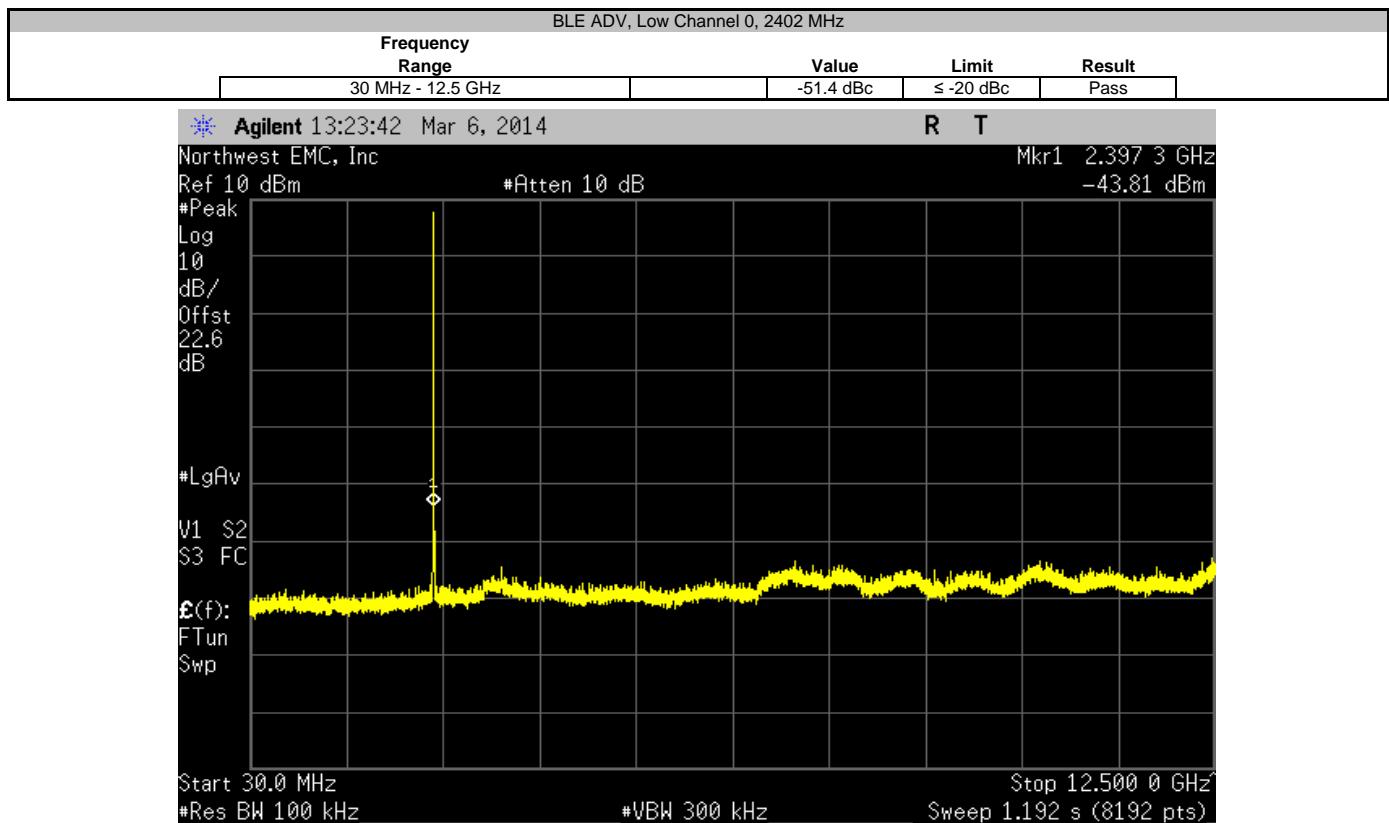
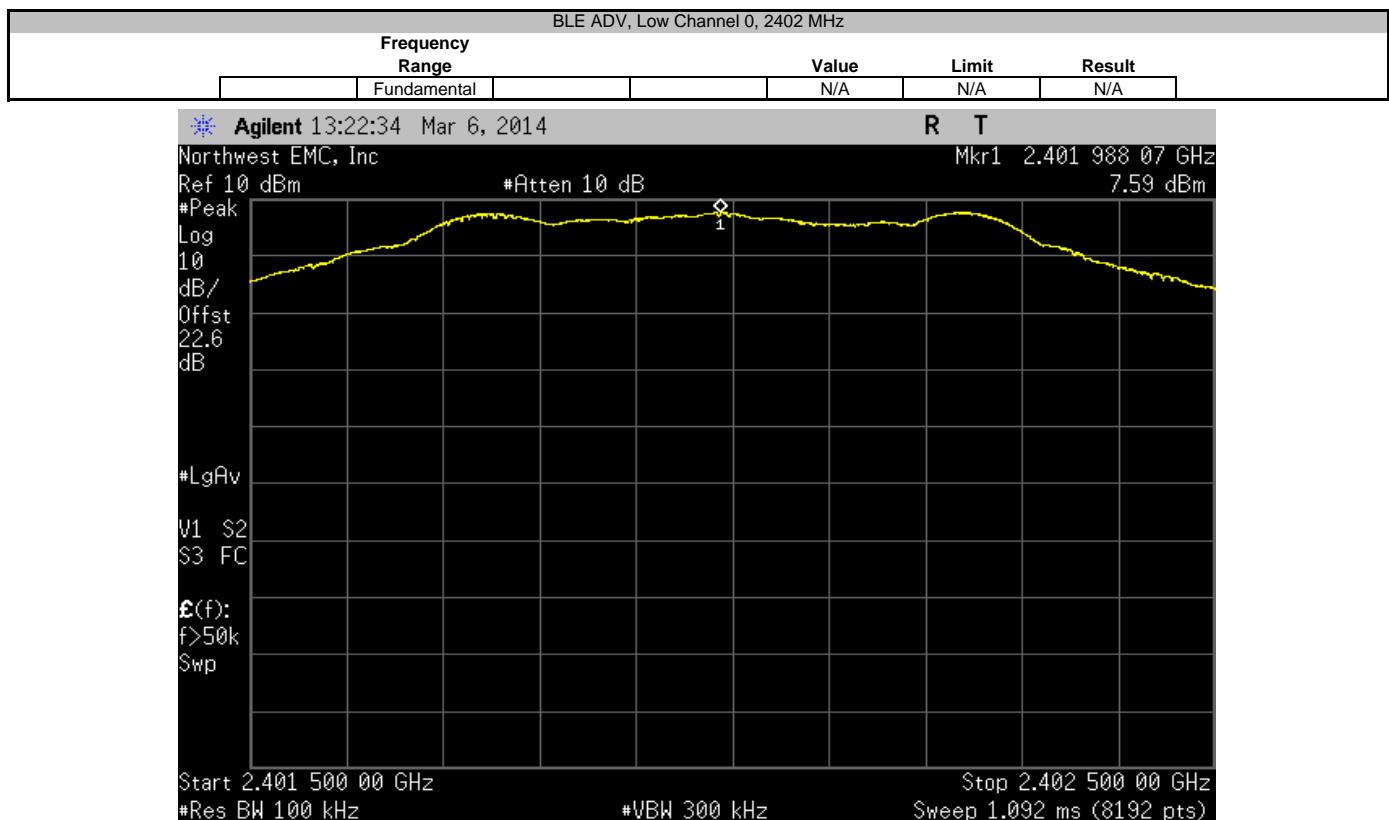




| BLE ADV, Low Channel 0, 2402 MHz | | | | |
|----------------------------------|--|-----------|-----------|--------|
| Frequency Range | | Value | Limit | Result |
| 12.5 GHz - 25 GHz | | -55.1 dBc | ≤ -20 dBc | Pass |

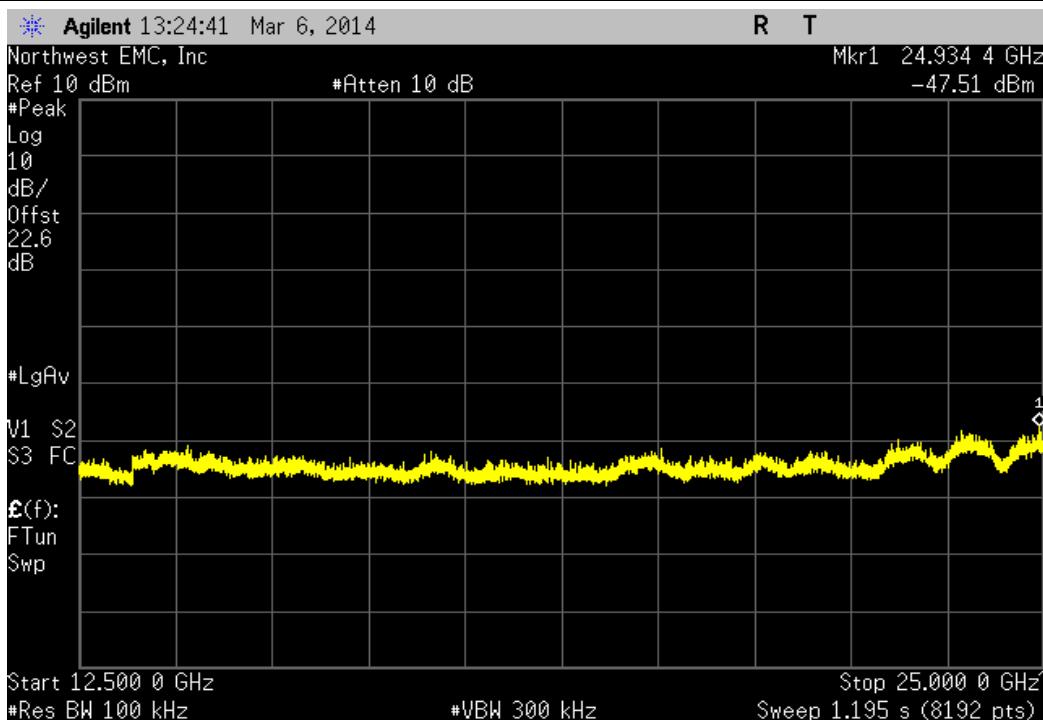



| BLE ADV, Mid Channel 12, 2426 MHz | | | | |
|-----------------------------------|--|-------|-------|--------|
| Frequency Range | | Value | Limit | Result |
| Fundamental | | N/A | N/A | N/A |


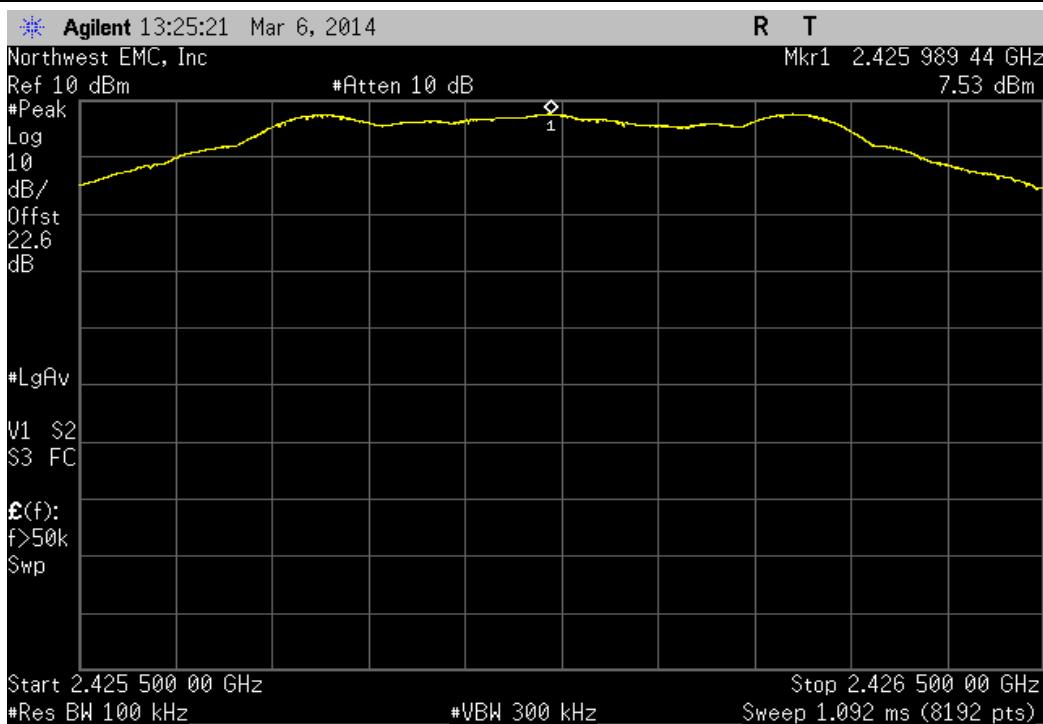


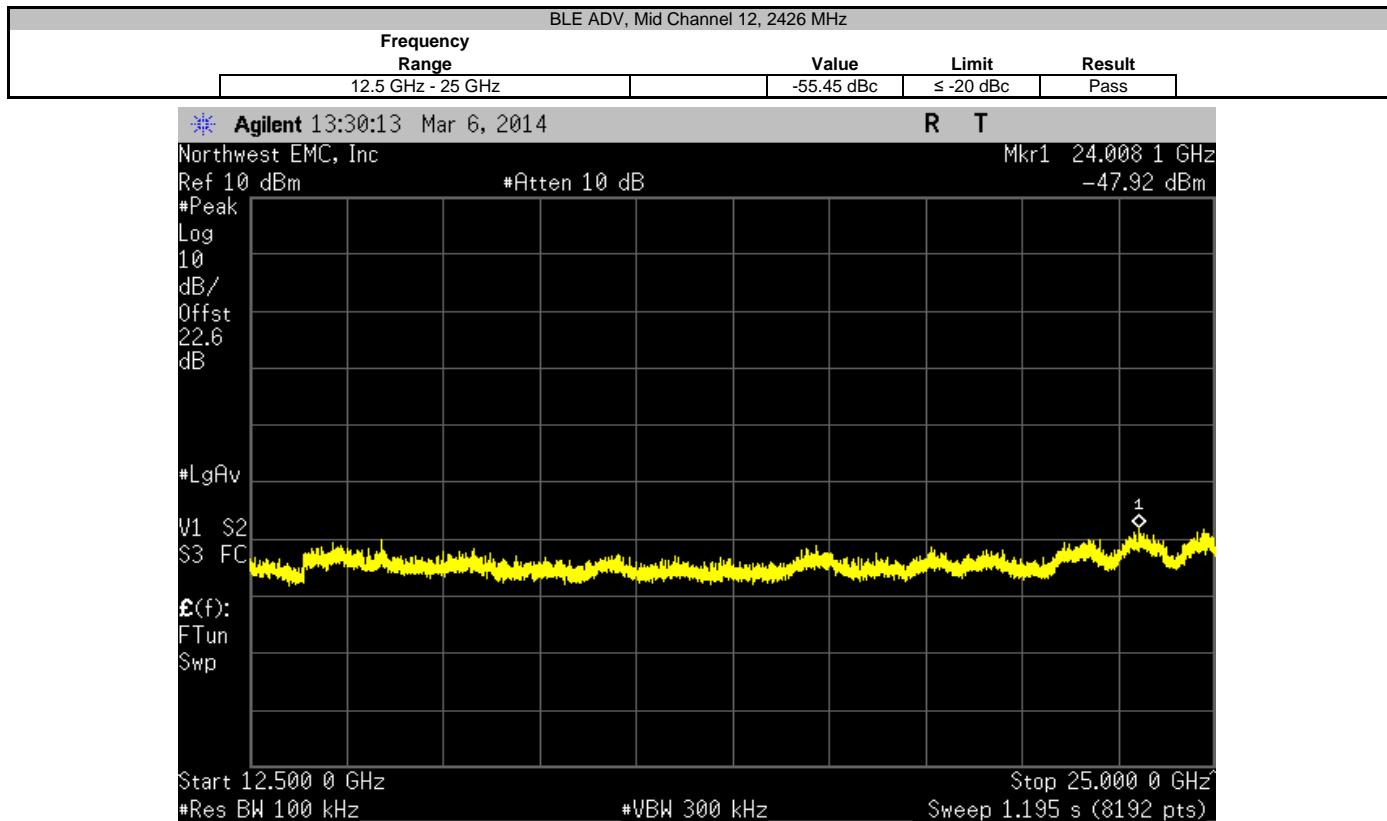
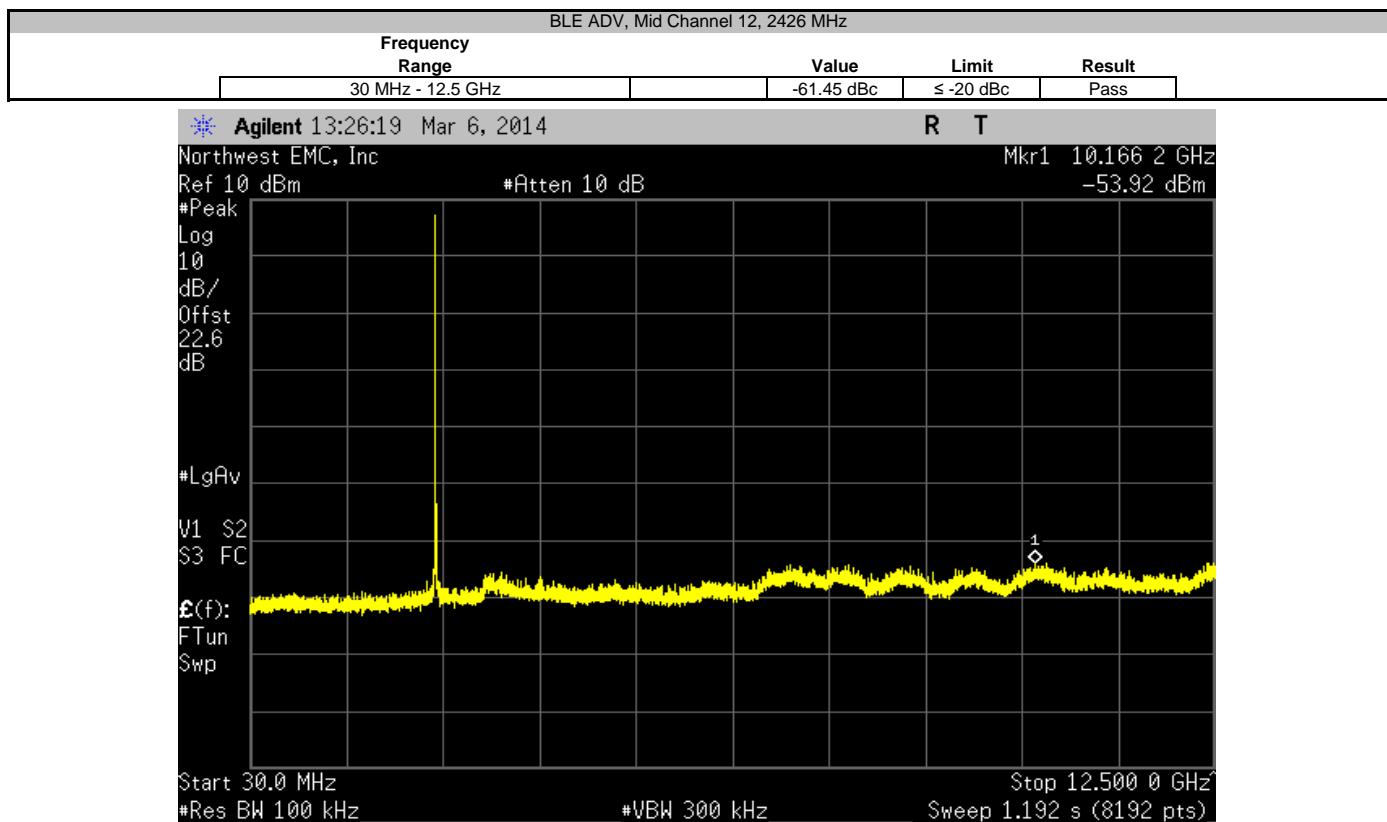


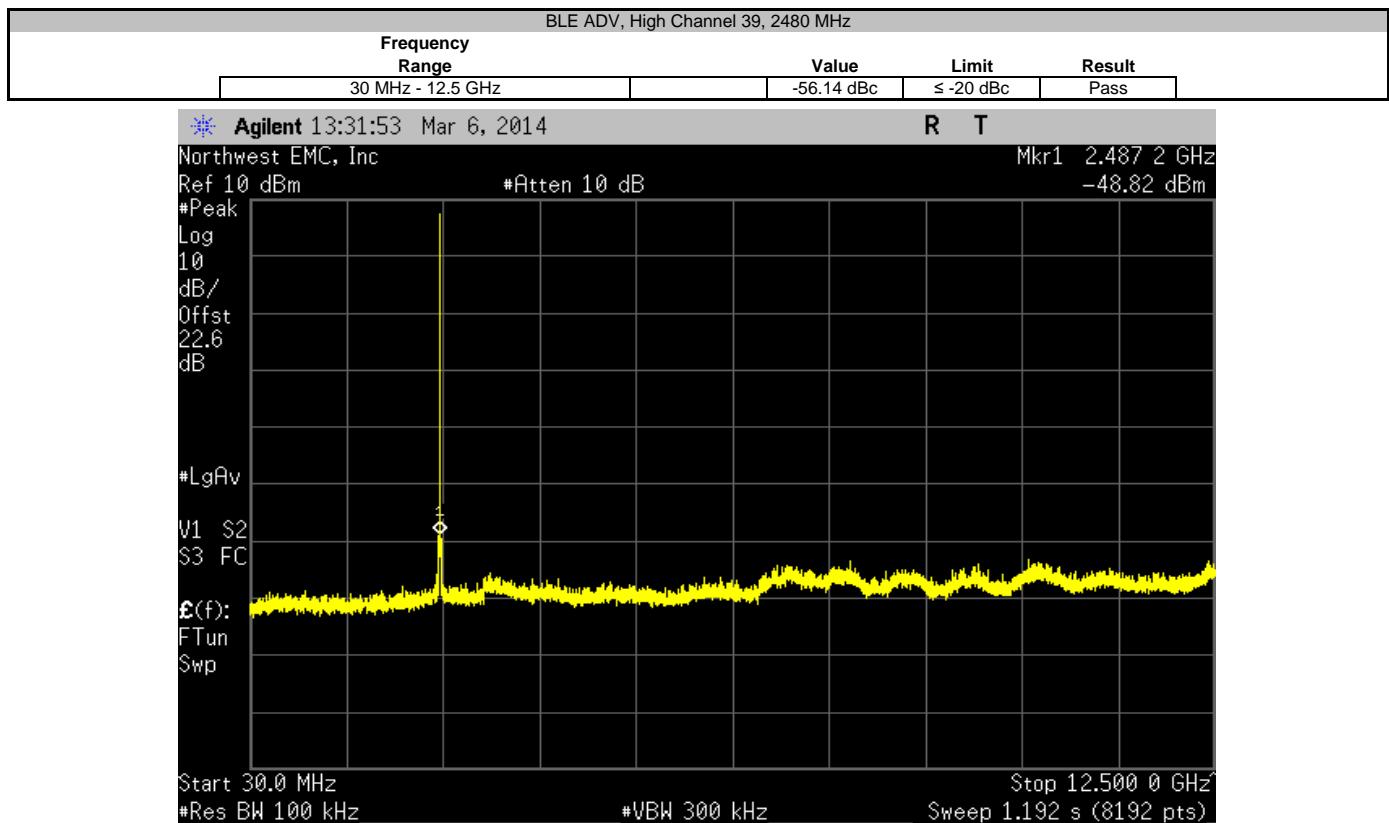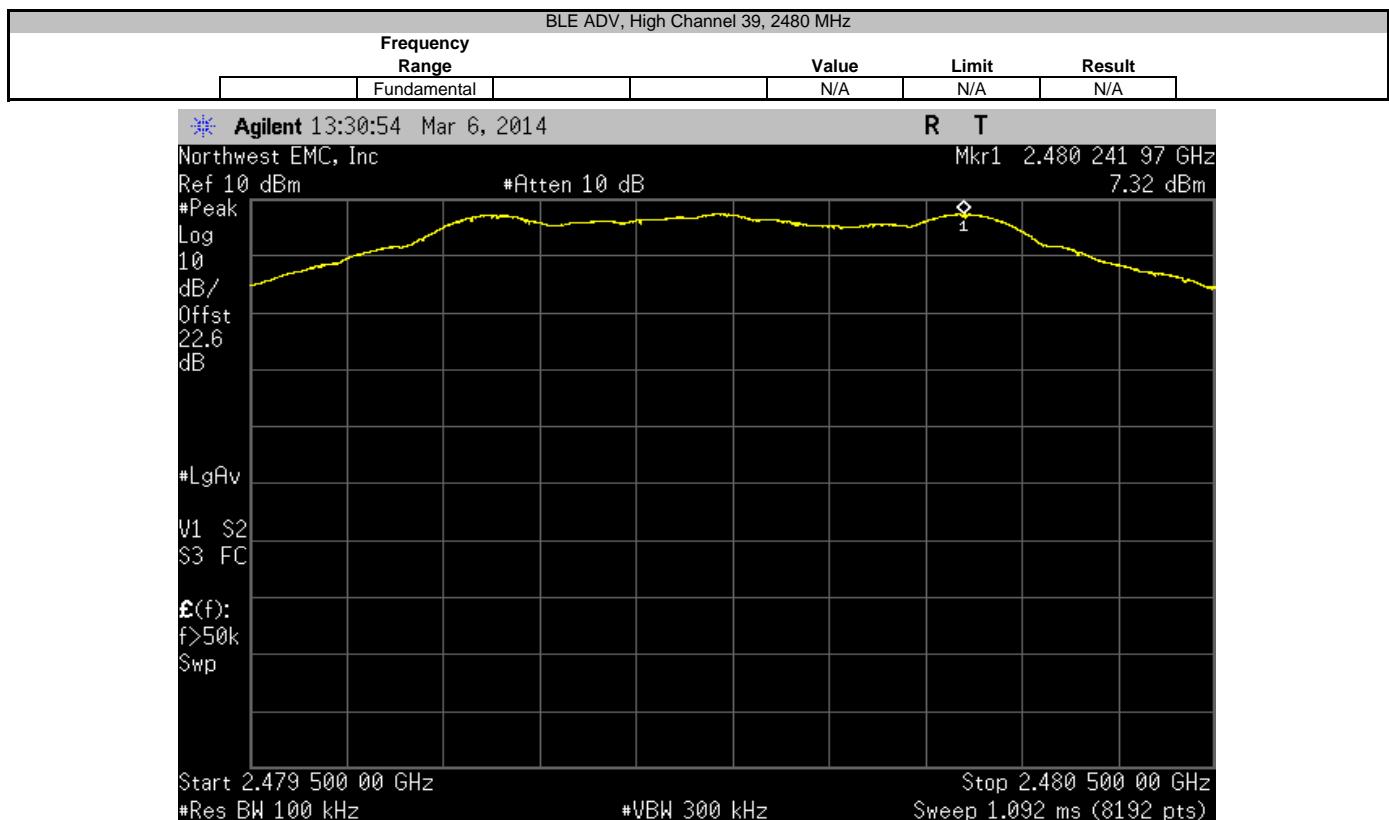


| BLE ADV, High Channel 39, 2480 MHz | | | | |
|------------------------------------|--|------------|-----------|--------|
| Frequency Range | | Value | Limit | Result |
| 12.5 GHz - 25 GHz | | -55.76 dBc | ≤ -20 dBc | Pass |

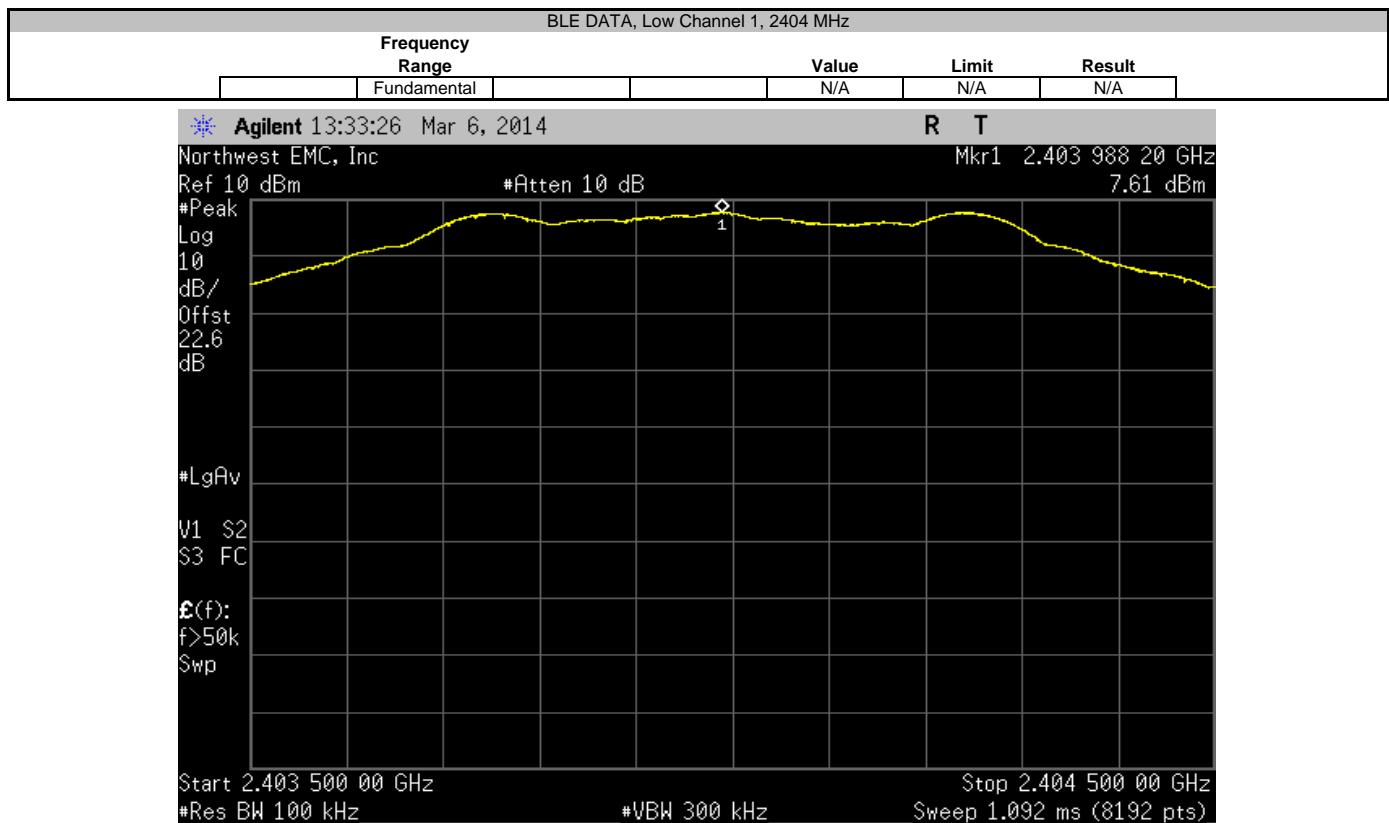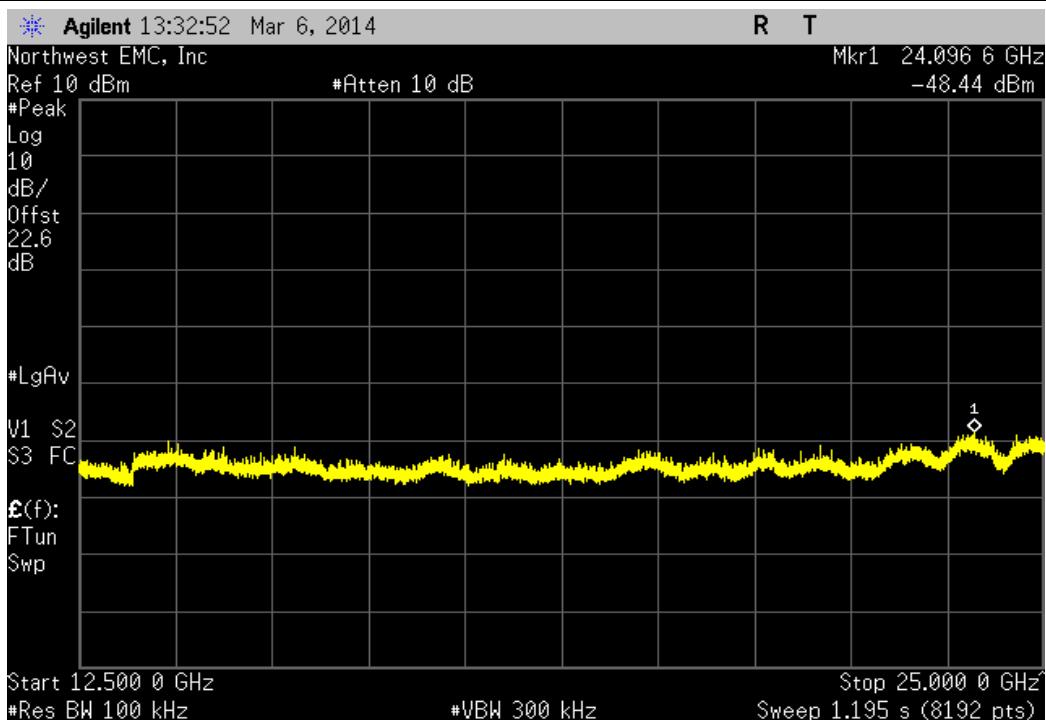

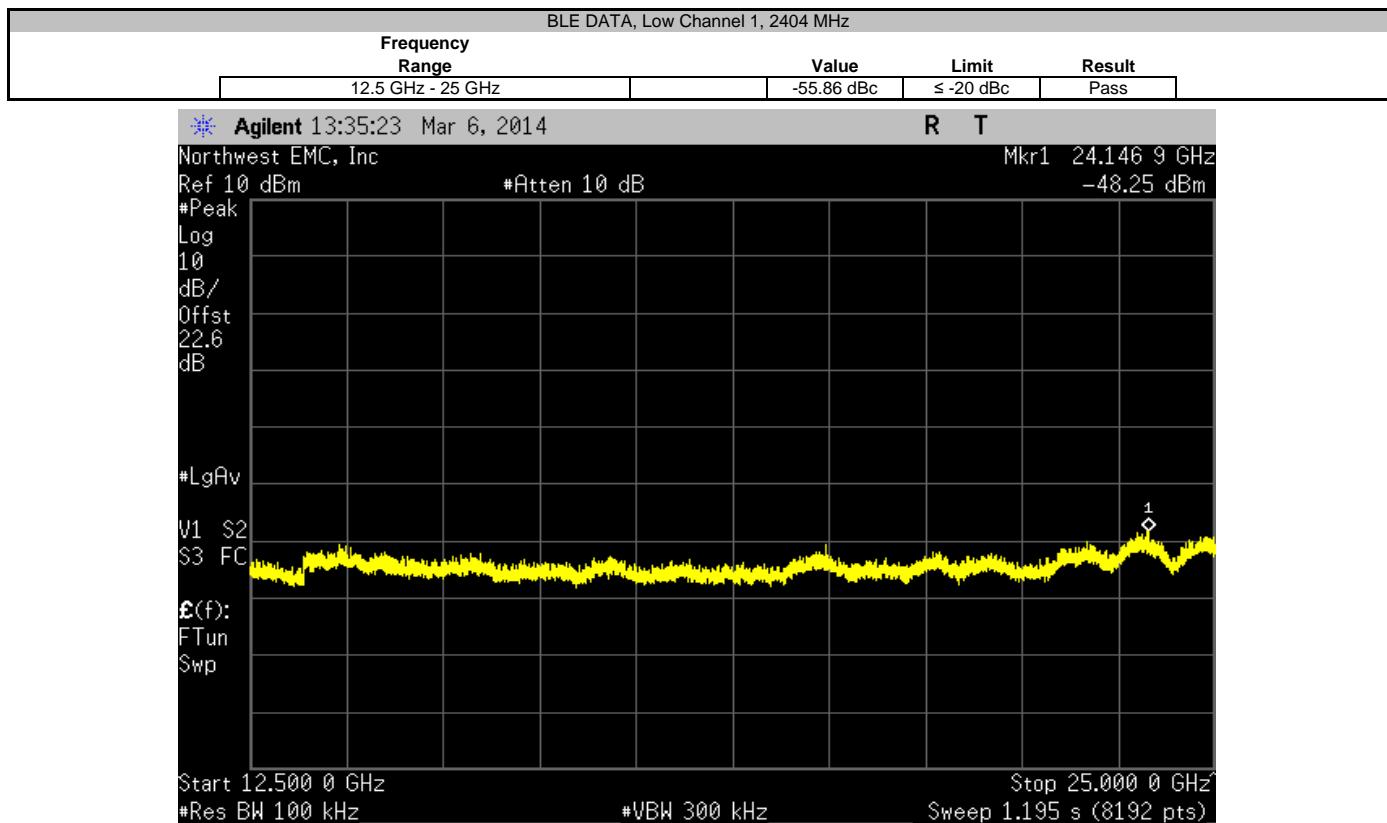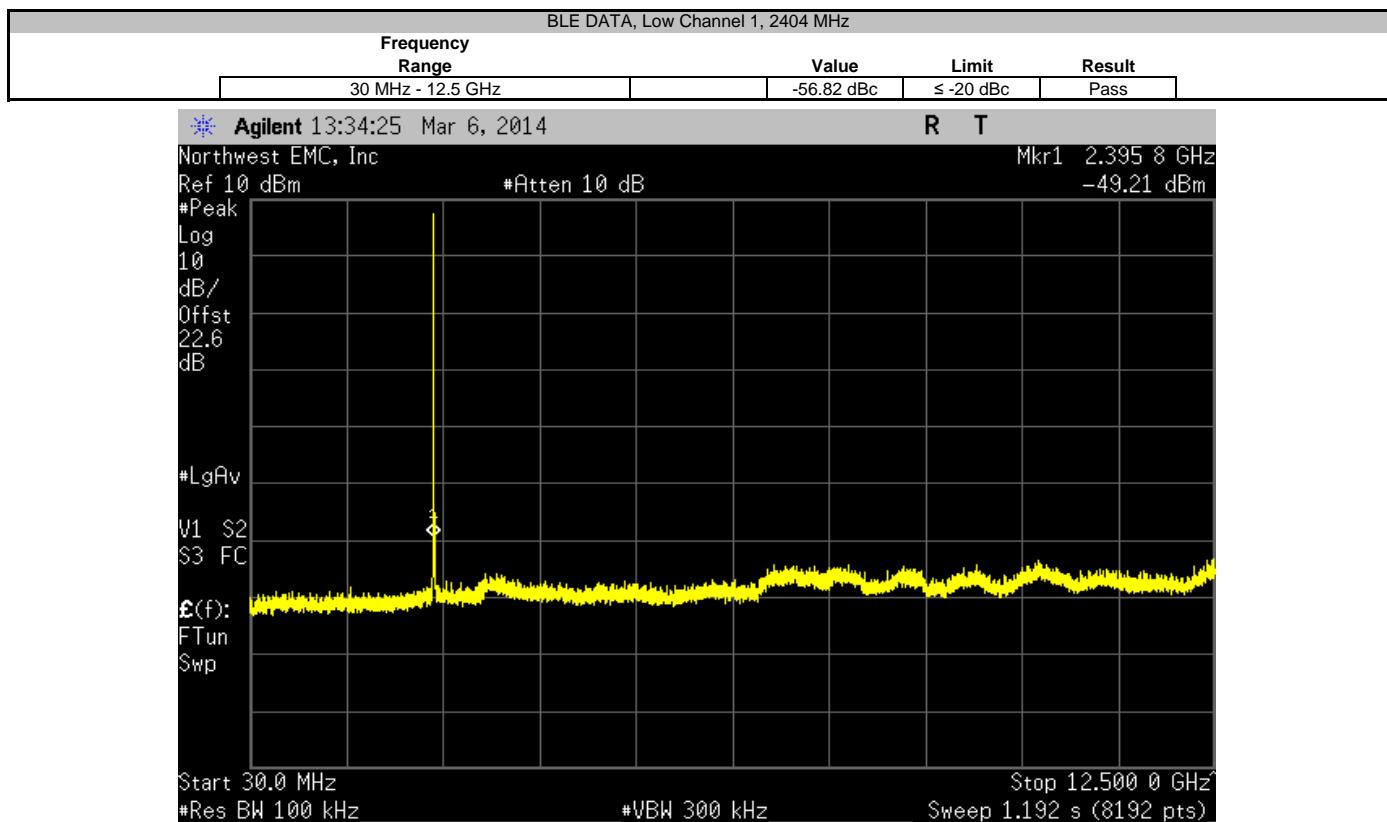


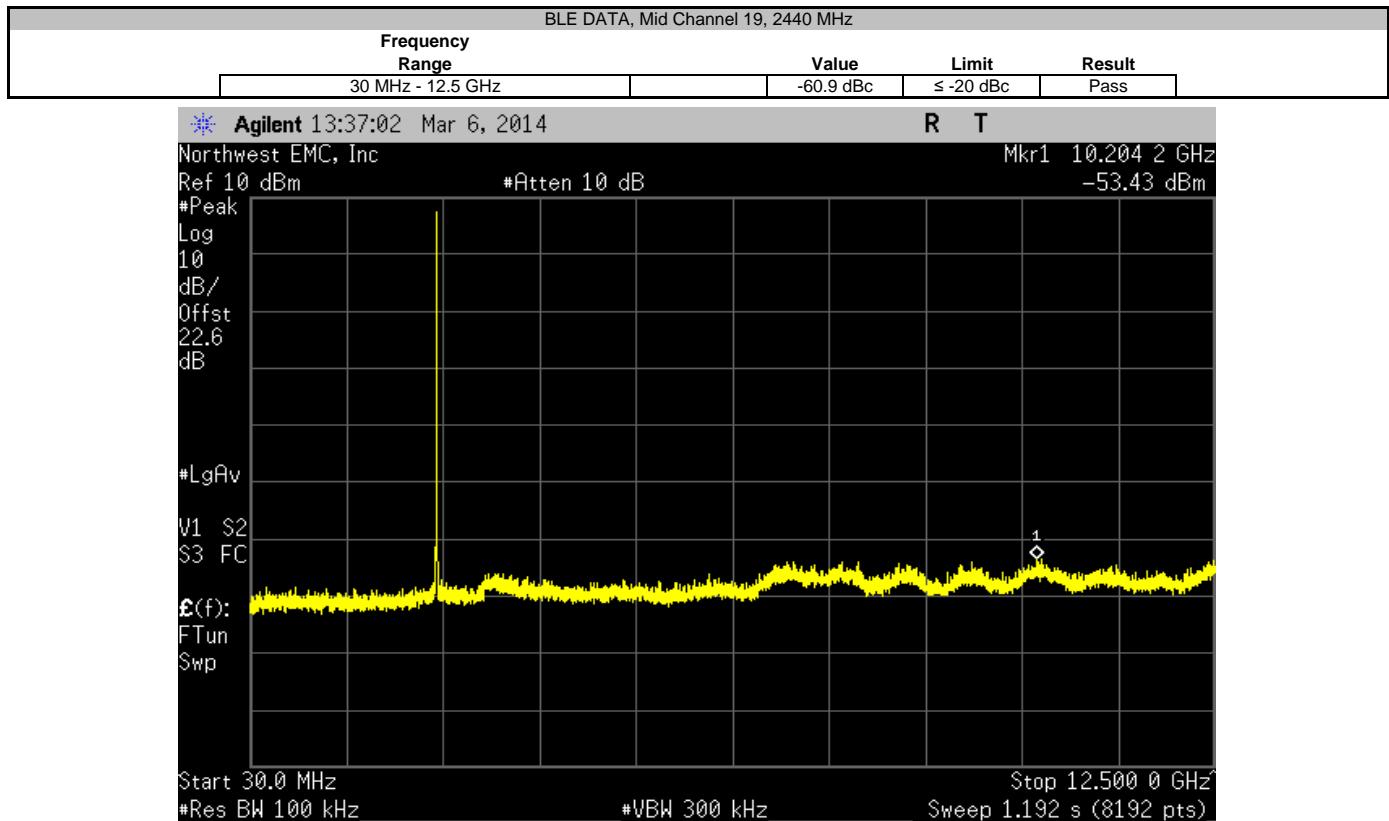
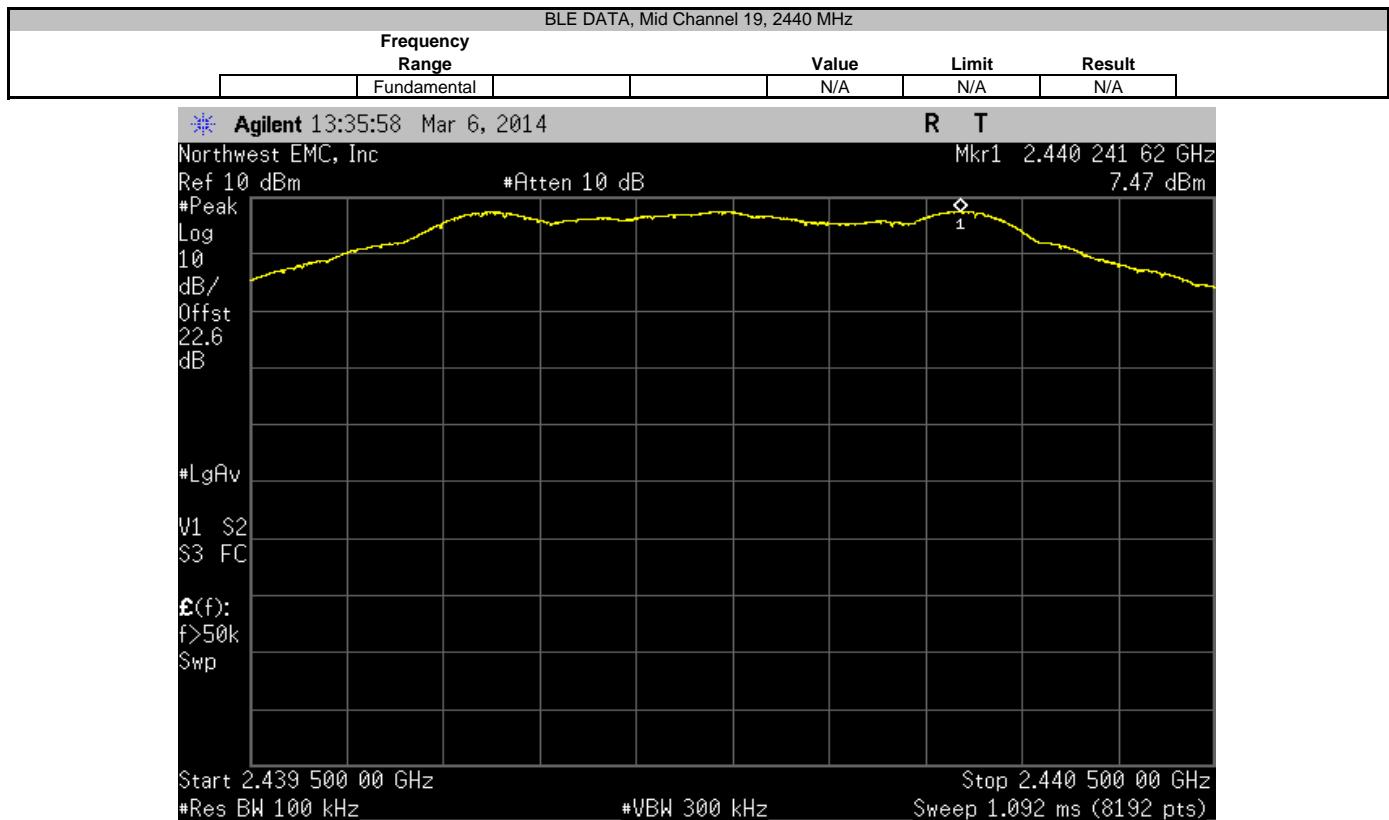


| BLE DATA, Mid Channel 19, 2440 MHz | | | | |
|------------------------------------|--|------------|-----------|--------|
| Frequency Range | | Value | Limit | Result |
| 12.5 GHz - 25 GHz | | -55.77 dBc | ≤ -20 dBc | Pass |

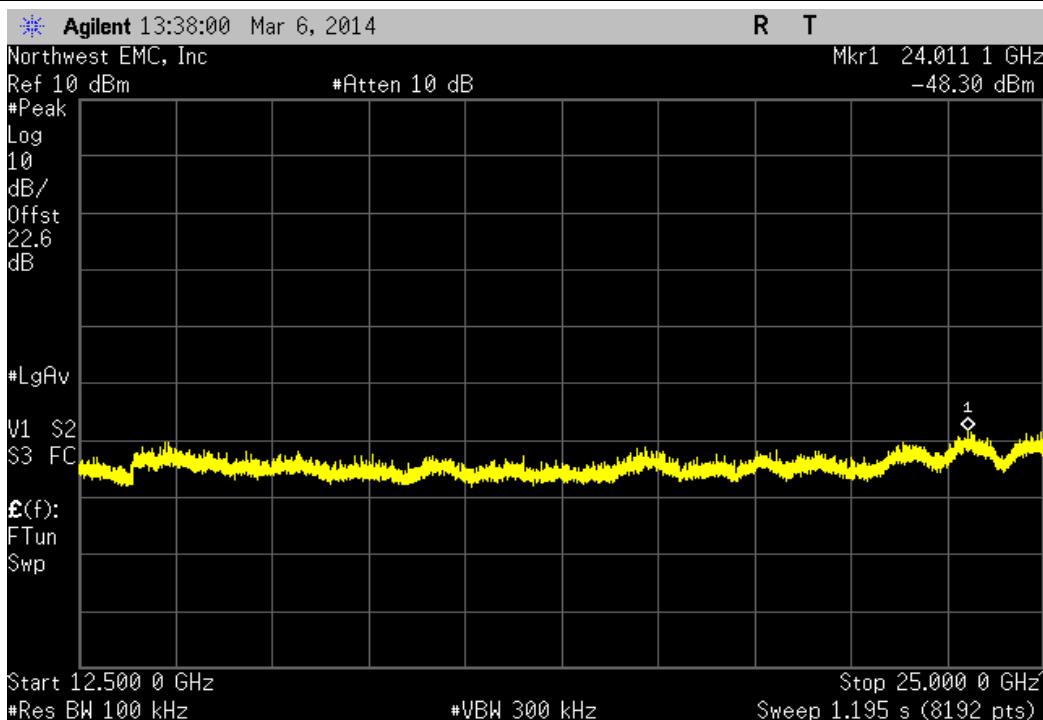

| BLE DATA, High Channel 38, 2478 MHz | | | | |
|-------------------------------------|--|-------|-------|--------|
| Frequency Range | | Value | Limit | Result |
| Fundamental | | N/A | N/A | N/A |

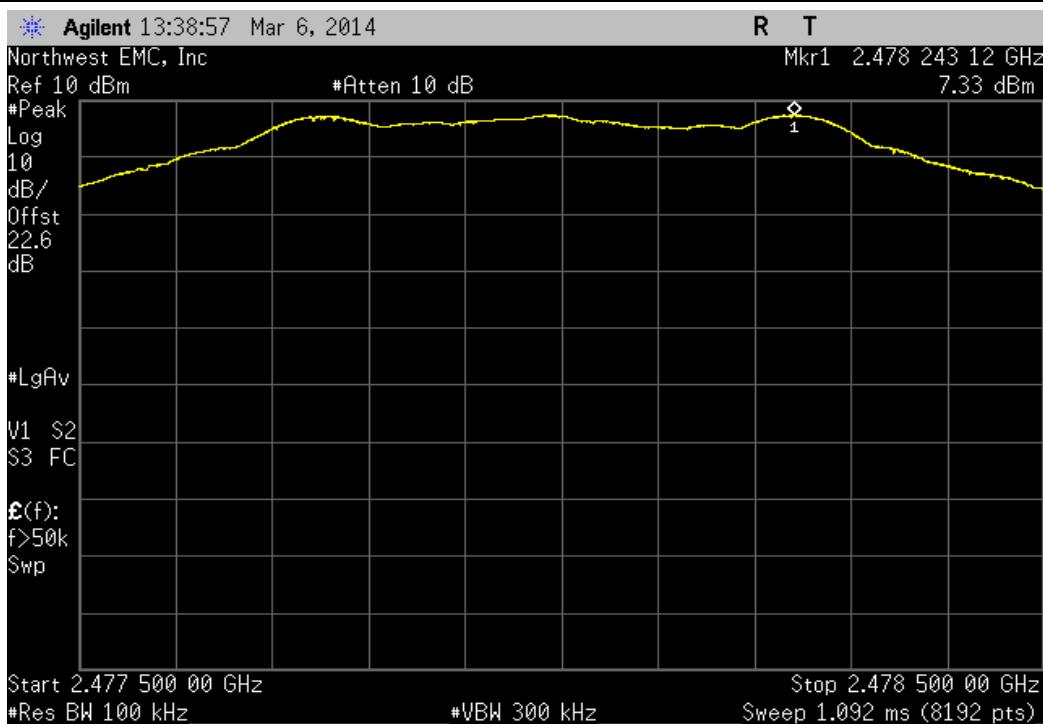

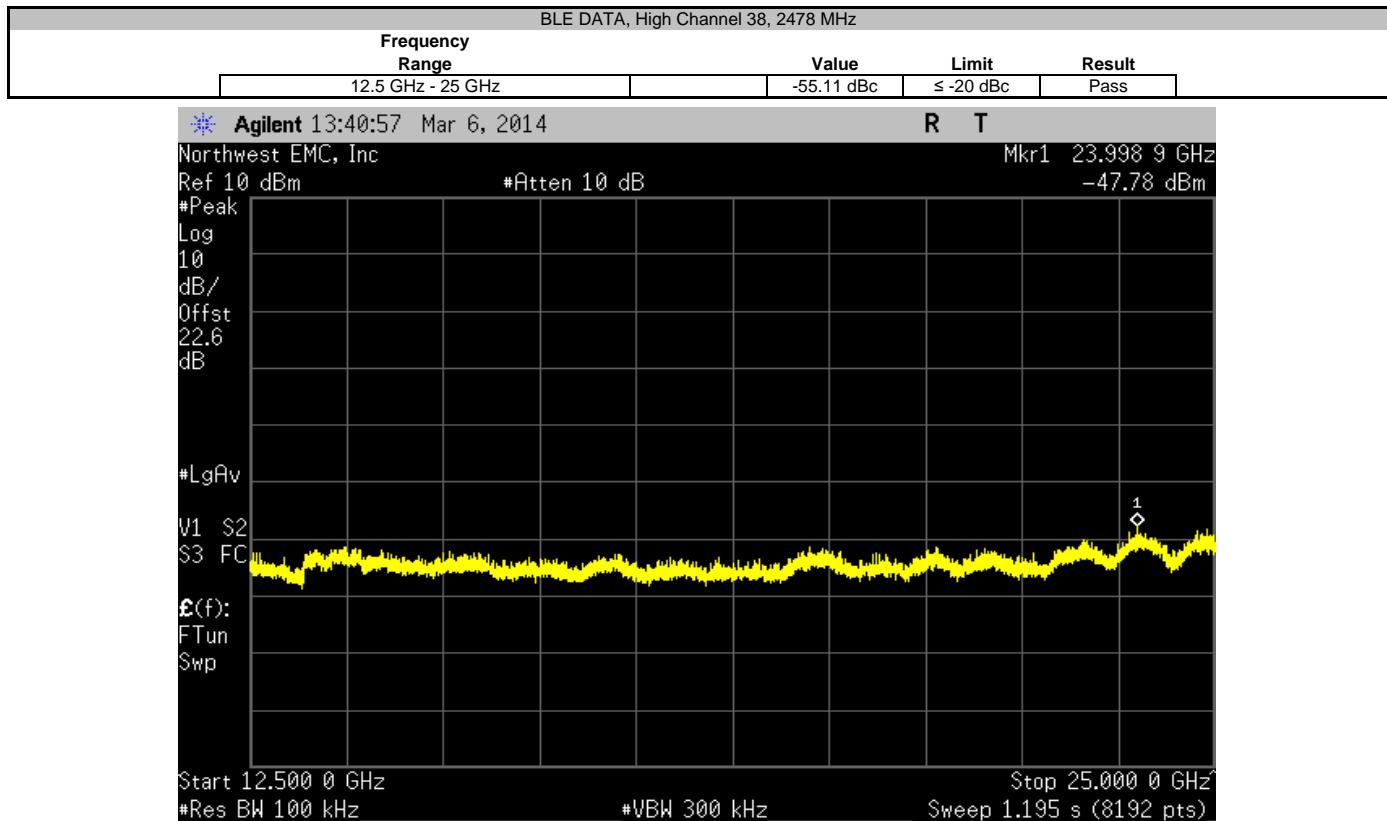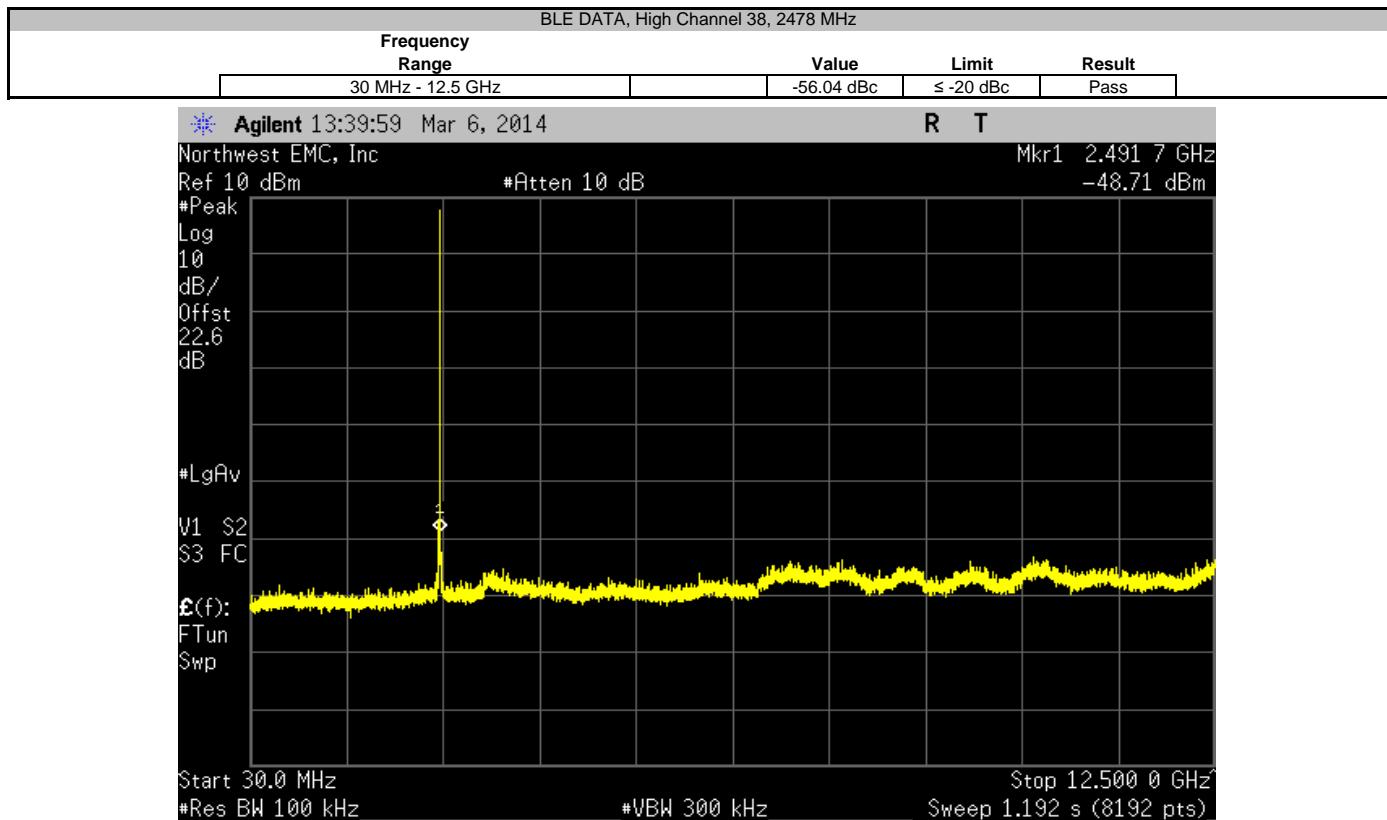

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

MODES OF OPERATION

Transmitting Bluetooth Low Energy (BLE), Advertising Mode

Transmitting Bluetooth Low Energy (BLE), Data Mode

CHANNELS TESTED

Low Channel 0, 2402 MHz, BLE ADV

Mid Channel 12, 2426 MHz, BLE ADV

High Channel 39, 2480 MHz, BLE ADV

Low Channel 1, 2404 MHz, BLE DATA

Mid Channel 19, 2440 MHz, BLE DATA

High Channel 38, 2478 MHz, BLE DATA

POWER SETTINGS INVESTIGATED

110VAC/60Hz

CONFIGURATIONS INVESTIGATED

MCS01702 - 2

FREQUENCY RANGE INVESTIGATED

| | | | |
|-----------------|--------|----------------|-----------|
| Start Frequency | 30 MHz | Stop Frequency | 26000 MHz |
|-----------------|--------|----------------|-----------|

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT

| Description | Manufacturer | Model | ID | Last Cal. | Interval |
|--------------------|--------------------|--------------------------|-----|------------|----------|
| HP Filter | Micro-Tronics | HPM50111 | HHI | 1/18/2013 | 24 mo |
| Attenuator | Fairview Microwave | SA18E-20 | AQV | 12/6/2013 | 12 mo |
| LP Filter | Micro-Tronics | LPM50004 | LFF | 11/14/2013 | 24 mo |
| Pre-Amplifier | Miteq | AMF-6F-18002650-25-10P | AOD | 7/10/2013 | 12 mo |
| Pre-Amplifier | Miteq | AMF-6F-12001800-30-10P | AOJ | 12/6/2013 | 12 mo |
| Pre-Amplifier | Miteq | AMF-6F-08001200-30-10P | AOK | 12/6/2013 | 12 mo |
| Pre-Amplifier | Miteq | AMF-3D-00100800-32-13P | AVZ | 10/24/2013 | 12 mo |
| Pre-Amplifier | Miteq | AM-1616-1000 | PAB | 10/24/2013 | 12 mo |
| Antenna, Horn | ETS | 3160-09 | AIY | NCR | 0 mo |
| Antenna, Horn | EMCO | 3160-08 | AHO | NCR | 0 mo |
| Antenna, Horn | EMCO | 3160-07 | AHP | NCR | 0 mo |
| Antenna, Horn | EMCO | 3115 | AHM | 6/19/2012 | 24 mo |
| Antenna, Biconilog | EMCO | 3142 | AXJ | 5/16/2012 | 36 mo |
| Cable I | N/A | N/A | SUM | 7/10/2013 | 12 mo |
| NC01 Cables | N/A | Standard Gain Horn Cable | NC3 | 12/6/2013 | 12 mo |
| NC01 Cables | N/A | 3115 Horn Cable | NC2 | 10/24/2013 | 12 mo |
| NC01 Cables | N/A | Bilog Cables | NC1 | 10/24/2013 | 12 mo |
| Spectrum Analyzer | Agilent | E4440A | AAW | 2/21/2013 | 24 mo |

MEASUREMENT BANDWIDTHS

| Frequency Range (MHz) | Peak Data (kHz) | Quasi-Peak Data (kHz) | Average Data (kHz) |
|-----------------------|-----------------|-----------------------|--------------------|
| 0.01 - 0.15 | 1.0 | 0.2 | 0.2 |
| 0.15 - 30.0 | 10.0 | 9.0 | 9.0 |
| 30.0 - 1000 | 100.0 | 120.0 | 120.0 |
| Above 1000 | 1000.0 | N/A | 1000.0 |

TEST DESCRIPTION

The highest gain of each type of antenna to be used with the EUT was tested. The EUT was configured for low, mid, and high band transmit frequencies. For each configuration, the spectrum was scanned throughout the specified range. In addition, measurements were made in the restricted bands to verify compliance. While scanning, emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and the EUT antenna in three orthogonal axis, and adjusting measurement antenna height and polarization. A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

| | | | | |
|-----------------|---|-------------------|-----------|--|
| Work Order: | MCSO1702 | Date: | 03/07/14 |  |
| Project: | None | Temperature: | 23 °C | |
| Job Site: | NC01 | Humidity: | 37% RH | |
| Serial Number: | 41152140753 | Barometric Pres.: | 1023 mbar | Tested by: Richard Mellroth |
| EUT: | 1631 | | | |
| Configuration: | 2 | | | |
| Customer: | Microsoft Corporation | | | |
| Attendees: | None | | | |
| EUT Power: | 110VAC/60Hz | | | |
| Operating Mode: | Transmitting BLE ADV, see comments next to data points for channel information. | | | |
| Deviations: | None | | | |
| Comments: | Measuring emissions at 2483.5 MHz and 2390 MHz restricted band edges. | | | |


| Test Specifications | Test Method |
|---------------------|------------------|
| FCC 15.247:2014 | ANSI C63.10:2009 |



| Freq (MHz) | Amplitude (dBuV) | Factor (dB) | Antenna Height (meters) | Azimuth (degrees) | Test Distance (meters) | External Attenuation (dB) | Polarity/Transducer Type | Detector | Distance Adjustment (dB) | Adjusted (dBuV/m) | Spec. Limit (dBuV/m) | Compared to Spec. (dB) | Comments |
|------------|------------------|-------------|-------------------------|-------------------|------------------------|---------------------------|--------------------------|----------|--------------------------|-------------------|----------------------|------------------------|-------------------------------------|
| 2483.597 | 47.7 | -2.0 | 1.3 | 309.0 | 3.0 | 20.0 | Horz | PK | 0.0 | 65.7 | 74.0 | -8.3 | High Ch 39, 2480 MHz, ADV, EUT Horz |
| 2483.567 | 46.5 | -2.0 | 1.1 | 57.0 | 3.0 | 20.0 | Horz | PK | 0.0 | 64.5 | 74.0 | -9.5 | High Ch 39, 2480 MHz, ADV, EUT Vert |
| 2483.877 | 45.4 | -2.0 | 1.2 | 236.0 | 3.0 | 20.0 | Vert | PK | 0.0 | 63.4 | 74.0 | -10.6 | High Ch 39, 2480 MHz, ADV, EUT Vert |
| 2483.677 | 25.1 | -2.0 | 1.3 | 309.0 | 3.0 | 20.0 | Horz | AV | 0.0 | 43.1 | 54.0 | -10.9 | High Ch 39, 2480 MHz, ADV, EUT Horz |
| 2484.337 | 25.0 | -2.0 | 1.2 | 236.0 | 3.0 | 20.0 | Vert | AV | 0.0 | 43.0 | 54.0 | -11.0 | High Ch 39, 2480 MHz, ADV, EUT Vert |
| 2483.683 | 25.0 | -2.0 | 1.1 | 57.0 | 3.0 | 20.0 | Horz | AV | 0.0 | 43.0 | 54.0 | -11.0 | High Ch 39, 2480 MHz, ADV, EUT Vert |
| 2485.497 | 24.9 | -2.0 | 1.2 | 162.0 | 3.0 | 20.0 | Vert | AV | 0.0 | 42.9 | 54.0 | -11.1 | High Ch 39, 2480 MHz, ADV, EUT Horz |
| 2485.193 | 24.9 | -2.0 | 1.2 | 3.0 | 3.0 | 20.0 | Vert | AV | 0.0 | 42.9 | 54.0 | -11.1 | High Ch 39, 2480 MHz, ADV, EUT Flat |
| 2485.133 | 24.9 | -2.0 | 1.2 | 178.0 | 3.0 | 20.0 | Horz | AV | 0.0 | 42.9 | 54.0 | -11.1 | High Ch 39, 2480 MHz, ADV, EUT Flat |
| 2388.680 | 24.9 | -2.2 | 1.2 | 344.0 | 3.0 | 20.0 | Horz | AV | 0.0 | 42.7 | 54.0 | -11.3 | Low Ch 0, 2402 MHz, ADV, EUT Vert |
| 2388.343 | 24.9 | -2.2 | 3.0 | 307.0 | 3.0 | 20.0 | Vert | AV | 0.0 | 42.7 | 54.0 | -11.3 | Low Ch 0, 2402 MHz, ADV, EUT Vert |
| 2388.087 | 24.9 | -2.2 | 1.2 | 179.0 | 3.0 | 20.0 | Vert | AV | 0.0 | 42.7 | 54.0 | -11.3 | Low Ch 0, 2402 MHz, ADV, EUT Flat |
| 2388.073 | 24.9 | -2.2 | 3.6 | 344.0 | 3.0 | 20.0 | Horz | AV | 0.0 | 42.7 | 54.0 | -11.3 | Low Ch 0, 2402 MHz, ADV, EUT Flat |
| 2388.143 | 24.8 | -2.2 | 2.6 | 4.0 | 3.0 | 20.0 | Vert | AV | 0.0 | 42.6 | 54.0 | -11.4 | Low Ch 0, 2402 MHz, ADV, EUT Horz |
| 2388.097 | 24.8 | -2.2 | 1.2 | 157.0 | 3.0 | 20.0 | Horz | AV | 0.0 | 42.6 | 54.0 | -11.4 | Low Ch 0, 2402 MHz, ADV, EUT Horz |
| 2485.227 | 42.6 | -2.0 | 1.2 | 3.0 | 3.0 | 20.0 | Vert | PK | 0.0 | 60.6 | 74.0 | -13.4 | High Ch 39, 2480 MHz, ADV, EUT Flat |
| 2485.497 | 41.7 | -2.0 | 1.2 | 178.0 | 3.0 | 20.0 | Horz | PK | 0.0 | 59.7 | 74.0 | -14.3 | High Ch 39, 2480 MHz, ADV, EUT Flat |
| 2389.963 | 40.9 | -2.2 | 3.0 | 307.0 | 3.0 | 20.0 | Vert | PK | 0.0 | 58.7 | 74.0 | -15.3 | Low Ch 0, 2402 MHz, ADV, EUT Vert |
| 2389.560 | 40.9 | -2.2 | 1.2 | 179.0 | 3.0 | 20.0 | Vert | PK | 0.0 | 58.7 | 74.0 | -15.3 | Low Ch 0, 2402 MHz, ADV, EUT Flat |
| 2388.417 | 40.9 | -2.2 | 3.6 | 344.0 | 3.0 | 20.0 | Horz | PK | 0.0 | 58.7 | 74.0 | -15.3 | Low Ch 0, 2402 MHz, ADV, EUT Flat |
| 2483.777 | 40.2 | -2.0 | 1.2 | 162.0 | 3.0 | 20.0 | Vert | PK | 0.0 | 58.2 | 74.0 | -15.8 | High Ch 39, 2480 MHz, ADV, EUT Horz |
| 2388.537 | 40.3 | -2.2 | 1.2 | 157.0 | 3.0 | 20.0 | Horz | PK | 0.0 | 58.1 | 74.0 | -15.9 | Low Ch 0, 2402 MHz, ADV, EUT Horz |
| 2389.957 | 40.2 | -2.2 | 1.2 | 344.0 | 3.0 | 20.0 | Horz | PK | 0.0 | 58.0 | 74.0 | -16.0 | Low Ch 0, 2402 MHz, ADV, EUT Vert |
| 2388.570 | 40.2 | -2.2 | 2.6 | 4.0 | 3.0 | 20.0 | Vert | PK | 0.0 | 58.0 | 74.0 | -16.0 | Low Ch 0, 2402 MHz, ADV, EUT Horz |

| | | | | |
|-----------------|---|-------------------|-----------|--|
| Work Order: | MCSO1702 | Date: | 03/10/14 |  Tested by: Richard Mellroth |
| Project: | None | Temperature: | 24 °C | |
| Job Site: | NC01 | Humidity: | 36% RH | |
| Serial Number: | 41152140753 | Barometric Pres.: | 1017 mbar | |
| EUT: | 1631 | | | |
| Configuration: | 2 | | | |
| Customer: | Microsoft Corporation | | | |
| Attendees: | None | | | |
| EUT Power: | 110VAC/60Hz | | | |
| Operating Mode: | Transmitting BLE ADV, see comments next to data points for channel information. | | | |
| Deviations: | None | | | |
| Comments: | None | | | |


| Test Specifications | Test Method |
|---------------------|------------------|
| FCC 15.247:2014 | ANSI C63.10:2009 |

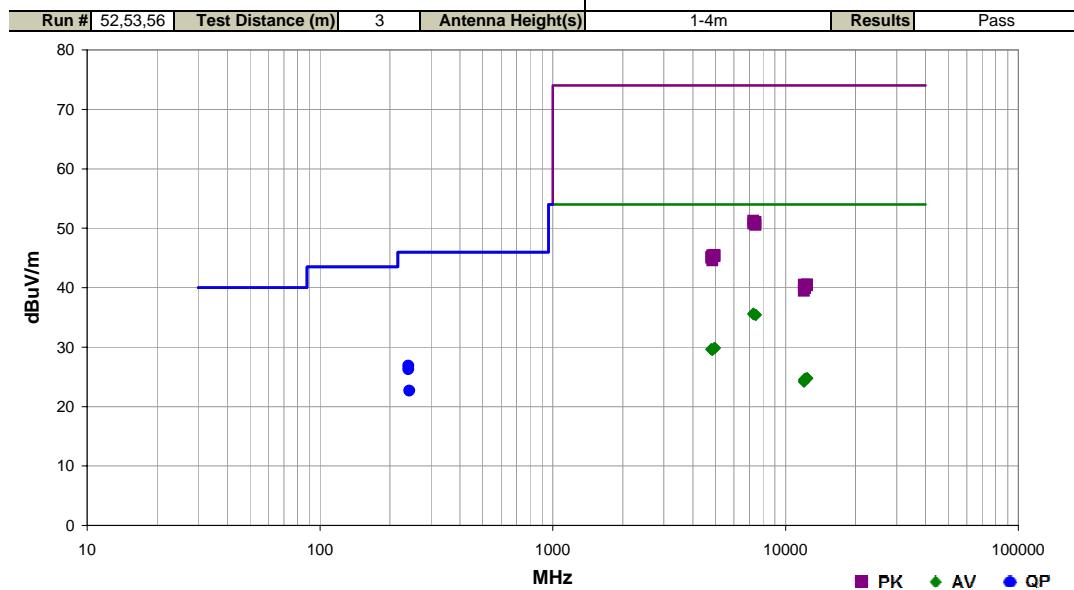

| Freq (MHz) | Amplitude (dBuV) | Factor (dB) | Antenna Height (meters) | Azimuth (degrees) | Test Distance (meters) | External Attenuation (dB) | Polarity/Transducer Type | Detector | Distance Adjustment (dB) | Adjusted (dBuV/m) | Spec. Limit (dBuV/m) | Compared to Spec. (dB) | Comments |
|------------|------------------|-------------|-------------------------|-------------------|------------------------|---------------------------|--------------------------|----------|--------------------------|-------------------|----------------------|------------------------|-------------------------------------|
| 7278.130 | 23.7 | 11.9 | 1.2 | 114.0 | 3.0 | 0.0 | Vert | AV | 0.0 | 35.6 | 54.0 | -18.4 | Mid Ch 12, 2426 MHz, ADV, EUT Vert |
| 7278.130 | 23.6 | 11.9 | 2.6 | 144.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 35.5 | 54.0 | -18.5 | Mid Ch 12, 2426 MHz, ADV, EUT Horz |
| 7439.880 | 22.7 | 12.7 | 2.0 | 199.0 | 3.0 | 0.0 | Vert | AV | 0.0 | 35.4 | 54.0 | -18.6 | High Ch 39, 2480 MHz, ADV, EUT Vert |
| 7438.535 | 22.7 | 12.7 | 2.8 | 263.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 35.4 | 54.0 | -18.6 | High Ch 39, 2480 MHz, ADV, EUT Horz |
| 240.010 | 28.0 | -1.1 | 1.1 | 297.0 | 3.0 | 0.0 | Horz | QP | 0.0 | 26.9 | 46.0 | -19.1 | Mid Ch 12, 2426 MHz, ADV, EUT Horz |
| 240.016 | 27.4 | -1.1 | 1.5 | 227.0 | 3.0 | 0.0 | Horz | QP | 0.0 | 26.3 | 46.0 | -19.7 | High Ch 39, 2480 MHz, ADV, EUT Horz |
| 7278.830 | 39.3 | 12.0 | 2.6 | 144.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 51.3 | 74.0 | -22.7 | Mid Ch 12, 2426 MHz, ADV, EUT Horz |
| 7440.015 | 38.3 | 12.7 | 2.8 | 263.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 51.0 | 74.0 | -23.0 | High Ch 39, 2480 MHz, ADV, EUT Horz |
| 7277.560 | 38.8 | 11.9 | 1.2 | 114.0 | 3.0 | 0.0 | Vert | PK | 0.0 | 50.7 | 74.0 | -23.3 | Mid Ch 12, 2426 MHz, ADV, EUT Vert |
| 242.056 | 23.7 | -1.0 | 1.0 | 226.0 | 3.0 | 0.0 | Horz | QP | 0.0 | 22.7 | 46.0 | -23.3 | Low Ch 0, 2402 MHz, ADV, EUT Horz |
| 7440.610 | 37.8 | 12.7 | 2.0 | 199.0 | 3.0 | 0.0 | Vert | PK | 0.0 | 50.5 | 74.0 | -23.5 | High Ch 39, 2480 MHz, ADV, EUT Vert |
| 4958.795 | 22.4 | 7.5 | 1.2 | 101.0 | 3.0 | 0.0 | Vert | AV | 0.0 | 29.9 | 54.0 | -24.1 | High Ch 39, 2480 MHz, ADV, EUT Vert |
| 4959.670 | 22.3 | 7.5 | 1.2 | 19.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 29.8 | 54.0 | -24.2 | High Ch 39, 2480 MHz, ADV, EUT Vert |
| 4803.755 | 22.5 | 7.2 | 1.2 | 41.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 29.7 | 54.0 | -24.3 | Low Ch 0, 2402 MHz, ADV, EUT Horz |
| 4803.590 | 22.4 | 7.2 | 2.4 | 309.0 | 3.0 | 0.0 | Vert | AV | 0.0 | 29.6 | 54.0 | -24.4 | Low Ch 0, 2402 MHz, ADV, EUT Vert |
| 4850.930 | 22.3 | 7.3 | 1.2 | 295.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 29.6 | 54.0 | -24.4 | Mid Ch 12, 2426 MHz, ADV, EUT Horz |
| 4850.610 | 22.3 | 7.3 | 1.2 | 33.0 | 3.0 | 0.0 | Vert | AV | 0.0 | 29.6 | 54.0 | -24.4 | Mid Ch 12, 2426 MHz, ADV, EUT Vert |
| 4959.305 | 38.0 | 7.5 | 1.2 | 19.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 45.5 | 74.0 | -28.5 | High Ch 39, 2480 MHz, ADV, EUT Horz |
| 4851.095 | 38.2 | 7.3 | 1.2 | 295.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 45.5 | 74.0 | -28.5 | Mid Ch 12, 2426 MHz, ADV, EUT Horz |
| 4959.685 | 37.8 | 7.5 | 1.2 | 101.0 | 3.0 | 0.0 | Vert | PK | 0.0 | 45.3 | 74.0 | -28.7 | High Ch 39, 2480 MHz, ADV, EUT Vert |
| 4803.695 | 38.0 | 7.2 | 1.2 | 41.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 45.2 | 74.0 | -28.8 | Low Ch 0, 2402 MHz, ADV, EUT Horz |
| 4803.305 | 37.8 | 7.2 | 2.4 | 309.0 | 3.0 | 0.0 | Vert | PK | 0.0 | 45.0 | 74.0 | -29.0 | Low Ch 0, 2402 MHz, ADV, EUT Vert |
| 12399.880 | 26.8 | -2.0 | 1.2 | 326.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 24.8 | 54.0 | -29.2 | High Ch 39, 2480 MHz, ADV, EUT Horz |
| 12399.860 | 26.8 | -2.0 | 1.2 | 2.0 | 3.0 | 0.0 | Vert | AV | 0.0 | 24.8 | 54.0 | -29.2 | High Ch 39, 2480 MHz, ADV, EUT Vert |
| 12131.180 | 26.9 | -2.2 | 2.3 | 275.0 | 3.0 | 0.0 | Vert | AV | 0.0 | 24.7 | 54.0 | -29.3 | Mid Ch 12, 2426 MHz, ADV, EUT Vert |
| 12131.060 | 26.8 | -2.2 | 1.2 | 359.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 24.6 | 54.0 | -29.4 | Mid Ch 12, 2426 MHz, ADV, EUT Horz |
| 4852.250 | 37.3 | 7.3 | 1.2 | 33.0 | 3.0 | 0.0 | Vert | PK | 0.0 | 44.6 | 74.0 | -29.4 | Mid Ch 12, 2426 MHz, ADV, EUT Vert |
| 12010.270 | 26.7 | -2.2 | 1.2 | 204.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 24.5 | 54.0 | -29.5 | Low Ch 0, 2402 MHz, ADV, EUT Horz |
| 12011.390 | 26.4 | -2.2 | 1.9 | 200.0 | 3.0 | 0.0 | Vert | AV | 0.0 | 24.2 | 54.0 | -29.8 | Low Ch 0, 2402 MHz, ADV, EUT Vert |
| 12398.640 | 42.6 | -2.0 | 1.2 | 2.0 | 3.0 | 0.0 | Vert | PK | 0.0 | 40.6 | 74.0 | -33.4 | High Ch 39, 2480 MHz, ADV, EUT Vert |
| 12010.960 | 42.7 | -2.2 | 1.2 | 204.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 40.5 | 74.0 | -33.5 | Low Ch 0, 2402 MHz, ADV, EUT Horz |
| 12399.800 | 42.4 | -2.0 | 1.2 | 326.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 40.4 | 74.0 | -33.6 | High Ch 39, 2480 MHz, ADV, EUT Horz |
| 12130.910 | 42.1 | -2.2 | 2.3 | 275.0 | 3.0 | 0.0 | Vert | PK | 0.0 | 39.9 | 74.0 | -34.1 | Mid Ch 12, 2426 MHz, ADV, EUT Vert |
| 12130.300 | 42.1 | -2.2 | 1.2 | 359.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 39.9 | 74.0 | -34.1 | Mid Ch 12, 2426 MHz, ADV, EUT Horz |
| 12009.040 | 41.7 | -2.2 | 1.9 | 200.0 | 3.0 | 0.0 | Vert | PK | 0.0 | 39.5 | 74.0 | -34.5 | Low Ch 0, 2402 MHz, ADV, EUT Vert |

| | | | | |
|-----------------|--|-------------------|-----------|--|
| Work Order: | MCSO1702 | Date: | 03/10/14 |  |
| Project: | None | Temperature: | 24 °C | |
| Job Site: | NC01 | Humidity: | 36% RH | |
| Serial Number: | 41152140753 | Barometric Pres.: | 1017 mbar | Tested by: Richard Mellroth |
| EUT: | 1631 | | | |
| Configuration: | 2 | | | |
| Customer: | Microsoft Corporation | | | |
| Attendees: | None | | | |
| EUT Power: | 110VAC/60Hz | | | |
| Operating Mode: | Transmitting BLE DATA, see comments next to data points for channel information. | | | |
| Deviations: | None | | | |
| Comments: | None | | | |

| Test Specifications | Test Method |
|---------------------|------------------|
| FCC 15.247:2014 | ANSI C63.10:2009 |

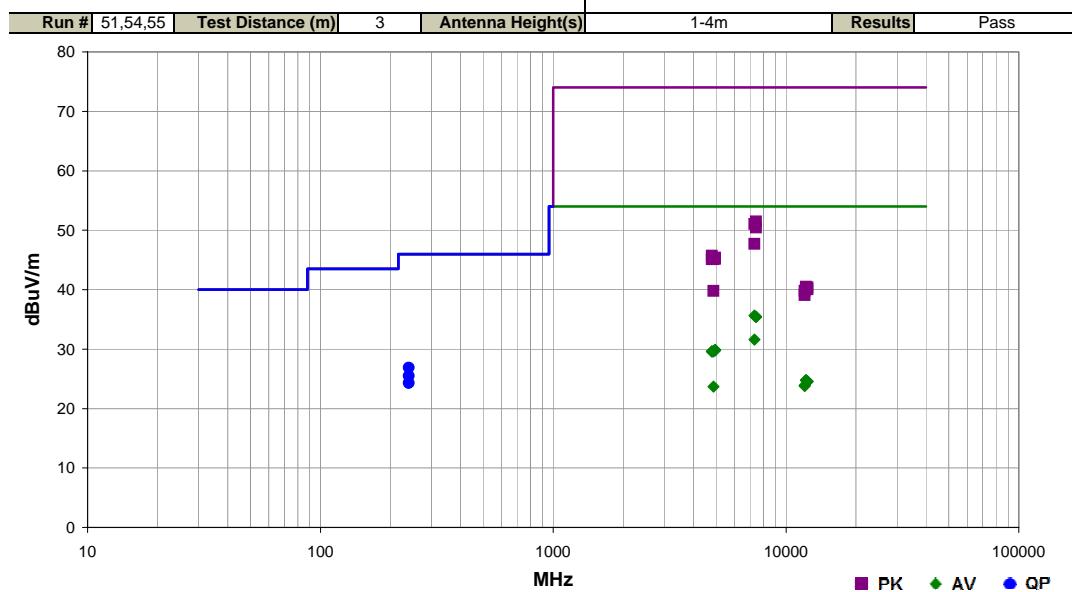

| Freq (MHz) | Amplitude (dBuV) | Factor (dB) | Antenna Height (meters) | Azimuth (degrees) | Test Distance (meters) | External Attenuation (dB) | Polarity/Transducer Type | Detector | Distance Adjustment (dB) | Adjusted (dBuV/m) | Spec. Limit (dBuV/m) | Compared to Spec. (dB) | Comments |
|------------|------------------|-------------|-------------------------|-------------------|------------------------|---------------------------|--------------------------|----------|--------------------------|-------------------|----------------------|------------------------|--------------------------------------|
| 7321.440 | 23.4 | 12.2 | 1.2 | 128.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 35.6 | 54.0 | -18.4 | Mid Ch 1, 2440 MHz, DATA, EUT Horz |
| 7434.990 | 22.7 | 12.7 | 1.2 | 174.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 35.4 | 54.0 | -18.6 | High Ch 38, 2478 MHz, DATA, EUT Horz |
| 7434.295 | 22.7 | 12.7 | 1.2 | 1.0 | 3.0 | 0.0 | Vert | AV | 0.0 | 35.4 | 54.0 | -18.6 | High Ch 38, 2478 MHz, DATA, EUT Vert |
| 240.013 | 28.0 | -1.1 | 1.5 | 263.0 | 3.0 | 0.0 | Horz | QP | 0.0 | 26.9 | 46.0 | -19.1 | Low Ch 1, 2404 MHz, DATA, EUT Horz |
| 240.016 | 26.6 | -1.1 | 1.0 | 220.0 | 3.0 | 0.0 | Horz | QP | 0.0 | 25.5 | 46.0 | -20.5 | Mid Ch 19, 2440 MHz, DATA, EUT Horz |
| 240.011 | 25.4 | -1.1 | 1.0 | 209.0 | 3.0 | 0.0 | Horz | QP | 0.0 | 24.3 | 46.0 | -21.7 | High Ch 38, 2478 MHz, DATA, EUT Horz |
| 7318.685 | 19.4 | 12.2 | 1.2 | 109.0 | 3.0 | 0.0 | Vert | AV | 0.0 | 31.6 | 54.0 | -22.4 | Mid Ch 19, 2440 MHz, DATA, EUT Vert |
| 7435.410 | 38.7 | 12.7 | 1.2 | 174.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 51.4 | 74.0 | -22.6 | High Ch 38, 2478 MHz, DATA, EUT Horz |
| 7320.100 | 38.8 | 12.2 | 1.2 | 128.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 51.0 | 74.0 | -23.0 | Mid Ch 19, 2440 MHz, DATA, EUT Horz |
| 7433.350 | 37.7 | 12.7 | 1.2 | 1.0 | 3.0 | 0.0 | Vert | PK | 0.0 | 50.4 | 74.0 | -23.6 | High Ch 38, 2478 MHz, DATA, EUT Vert |
| 4955.590 | 22.4 | 7.5 | 1.2 | 50.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 29.9 | 54.0 | -24.1 | High Ch 38, 2478 MHz, DATA, EUT Horz |
| 4955.475 | 22.3 | 7.5 | 1.2 | 40.0 | 3.0 | 0.0 | Vert | AV | 0.0 | 29.8 | 54.0 | -24.2 | High Ch 38, 2478 MHz, DATA, EUT Vert |
| 4880.205 | 22.3 | 7.3 | 1.2 | 349.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 29.6 | 54.0 | -24.4 | Mid Ch 19, 2440 MHz, DATA, EUT Horz |
| 4804.880 | 22.4 | 7.2 | 2.7 | 282.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 29.6 | 54.0 | -24.4 | Low Ch 1, 2404 MHz, DATA, EUT Horz |
| 4804.165 | 22.4 | 7.2 | 3.4 | 158.0 | 3.0 | 0.0 | Vert | AV | 0.0 | 29.6 | 54.0 | -24.4 | Low Ch 1, 2404 MHz, DATA, EUT Vert |
| 7320.255 | 35.5 | 12.2 | 1.2 | 109.0 | 3.0 | 0.0 | Vert | PK | 0.0 | 47.7 | 74.0 | -26.3 | Mid Ch 19, 2440 MHz, DATA, EUT Vert |
| 4803.690 | 38.5 | 7.2 | 3.4 | 158.0 | 3.0 | 0.0 | Vert | PK | 0.0 | 45.7 | 74.0 | -28.3 | Low Ch 1, 2404 MHz, DATA, EUT Vert |
| 4954.600 | 37.9 | 7.5 | 1.2 | 50.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 45.4 | 74.0 | -28.6 | High Ch 38, 2478 MHz, DATA, EUT Horz |
| 4955.815 | 37.7 | 7.5 | 1.2 | 40.0 | 3.0 | 0.0 | Vert | PK | 0.0 | 45.2 | 74.0 | -28.8 | High Ch 38, 2478 MHz, DATA, EUT Vert |
| 4880.110 | 37.8 | 7.3 | 1.2 | 349.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 45.1 | 74.0 | -28.9 | Mid Ch 19, 2440 MHz, DATA, EUT Horz |
| 4803.905 | 37.9 | 7.2 | 2.7 | 282.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 45.1 | 74.0 | -28.9 | Low Ch 1, 2404 MHz, DATA, EUT Horz |
| 12201.490 | 26.9 | -2.1 | 1.2 | 32.0 | 3.0 | 0.0 | Vert | AV | 0.0 | 24.8 | 54.0 | -29.2 | Mid Ch 19, 2440 MHz, DATA, EUT Vert |
| 12201.150 | 26.9 | -2.1 | 1.2 | 46.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 24.8 | 54.0 | -29.2 | Mid Ch 19, 2440 MHz, DATA, EUT Horz |
| 12391.490 | 26.6 | -2.0 | 1.2 | 243.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 24.6 | 54.0 | -29.4 | High Ch 38, 2478 MHz, DATA, EUT Horz |
| 12391.090 | 26.6 | -2.0 | 1.2 | 28.0 | 3.0 | 0.0 | Vert | AV | 0.0 | 24.6 | 54.0 | -29.4 | High Ch 38, 2478 MHz, DATA, EUT Vert |
| 12020.720 | 26.1 | -2.2 | 1.2 | 165.0 | 3.0 | 0.0 | Vert | AV | 0.0 | 23.9 | 54.0 | -30.1 | Low Ch 1, 2404 MHz, DATA, EUT Vert |
| 12020.790 | 26.0 | -2.2 | 1.2 | 360.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 23.8 | 54.0 | -30.2 | Low Ch 1, 2404 MHz, DATA, EUT Horz |
| 4878.500 | 16.4 | 7.3 | 1.2 | 75.0 | 3.0 | 0.0 | Vert | AV | 0.0 | 23.7 | 54.0 | -30.3 | Mid Ch 19, 2440 MHz, DATA, EUT Vert |
| 12199.110 | 42.6 | -2.1 | 1.2 | 46.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 40.5 | 74.0 | -33.5 | Mid Ch 19, 2440 MHz, DATA, EUT Horz |
| 12390.150 | 42.4 | -2.0 | 1.2 | 28.0 | 3.0 | 0.0 | Vert | PK | 0.0 | 40.4 | 74.0 | -33.6 | High Ch 38, 2478 MHz, DATA, EUT Vert |
| 12200.100 | 42.2 | -2.1 | 1.2 | 32.0 | 3.0 | 0.0 | Vert | PK | 0.0 | 40.1 | 74.0 | -33.9 | Mid Ch 19, 2440 MHz, DATA, EUT Horz |
| 12391.220 | 42.1 | -2.0 | 1.2 | 243.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 40.1 | 74.0 | -33.9 | High Ch 38, 2478 MHz, DATA, EUT Horz |
| 4879.290 | 32.5 | 7.3 | 1.2 | 75.0 | 3.0 | 0.0 | Vert | PK | 0.0 | 39.8 | 74.0 | -34.2 | Mid Ch 19, 2440 MHz, DATA, EUT Vert |
| 12021.090 | 42.0 | -2.2 | 1.2 | 360.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 39.8 | 74.0 | -34.2 | Low Ch 1, 2404 MHz, DATA, EUT Horz |
| 12018.730 | 41.3 | -2.2 | 1.2 | 165.0 | 3.0 | 0.0 | Vert | PK | 0.0 | 39.1 | 74.0 | -34.9 | Low Ch 1, 2404 MHz, DATA, EUT Vert |

AC POWERLINE CONDUCTED EMISSIONS

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

MODES OF OPERATION

Transmitting BLE ADV

CHANNELS TESTED

High Channel 39, 2480 MHz, BLE

Mid Channel 12, 2426 MHz, BLE

Low Channel 0, 2402 MHz, BLE

POWER SETTINGS INVESTIGATED

110VAC/60Hz

CONFIGURATIONS INVESTIGATED

MCS01702 - 2

SAMPLE CALCULATIONS

Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

TEST EQUIPMENT

| Description | Manufacturer | Model | ID | Last Cal. | Interval |
|------------------|--------------------|----------------------------|-----|------------|----------|
| LISN | Solar | 9252-50-R-24-BNC | LIK | 1/8/2014 | 12 mo |
| NC05 Cables | N/A | Conducted / NF Probe Cable | NC4 | 12/12/2013 | 12 mo |
| High Pass Filter | TTE | H97-100K-50-720B | HHF | 1/22/2014 | 12 mo |
| Attenuator | Fairview Microwave | SA03B-20 | RKD | 12/12/2013 | 12 mo |
| Receiver | Rohde & Schwarz | ESCI | ARE | 5/30/2013 | 12 mo |

MEASUREMENT BANDWIDTHS



| Frequency Range (MHz) | Peak Data (kHz) | Quasi-Peak Data (kHz) | Average Data (kHz) |
|-----------------------|-----------------|-----------------------|--------------------|
| 0.01 - 0.15 | 1.0 | 0.2 | 0.2 |
| 0.15 - 30.0 | 10.0 | 9.0 | 9.0 |
| 30.0 - 1000 | 100.0 | 120.0 | 120.0 |
| Above 1000 | 1000.0 | N/A | 1000.0 |

Measurements were made using the bandwidths and detectors specified. No video filter was used.

TEST DESCRIPTION

The EUT will be powered either directly or indirectly from the AC power line. Therefore, conducted emissions measurements were made on the AC input of the EUT, or on the AC input of the device used to power the EUT. The AC power line conducted emissions were measured with the EUT operating at the lowest, the highest, and a middle channel in the operational band. The EUT was transmitting at its maximum data rate. For each mode, the spectrum was scanned from 150 kHz to 30 MHz. The test setup and procedures were in accordance with ANSI C63.10-2009.

| | | | | | |
|---------------------|---|-------------------|-----------|---|------------------|
| Work Order: | MCSO1702 | Date: | 03/07/14 |  | |
| Project: | None | Temperature: | 24 °C | | |
| Job Site: | NC05 | Humidity: | 36% RH | | |
| Serial Number: | 41152140753 | Barometric Pres.: | 1023 mbar | Tested by: | Richard Mellroth |
| EUT: | 1631 | | | | |
| Configuration: | 2 | | | | |
| Customer: | Microsoft Corporation | | | | |
| Attendees: | None | | | | |
| EUT Power: | 110VAC/60Hz | | | | |
| Operating Mode: | Transmitting BLE ADV, Low Channel 0, 2402 MHz | | | | |
| Deviations: | None | | | | |
| Comments: | None | | | | |
| Test Specifications | | Test Method | | | |
| FCC 15.207:2014 | | ANSI C63.10:2009 | | | |
| Run # | 7 | Line: | High Line | Ext. Attenuation: | 20 |
| | | | | Results | Pass |

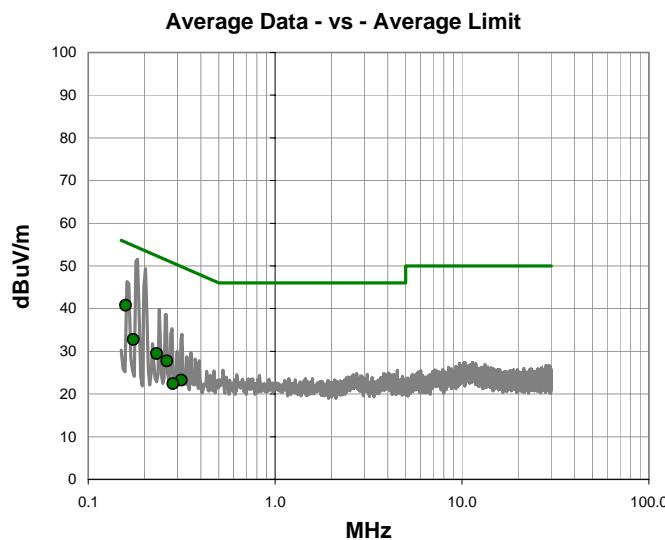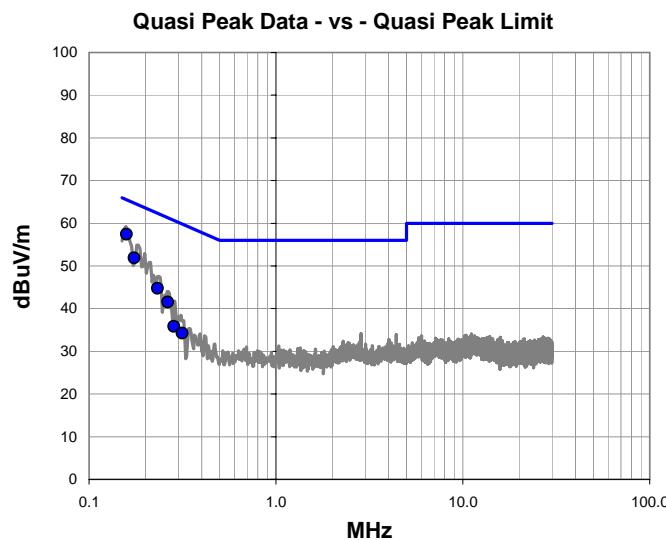

Quasi Peak Data - vs - Quasi Peak Limit



| Freq (MHz) | Amplitude (dBuV) | Factor (dB) | Adjusted (dBuV/m) | Spec. Limit (dBuV/m) | Compared to Spec. (dB) |
|------------|------------------|-------------|-------------------|----------------------|------------------------|
| 0.158 | 37.2 | 20.2 | 57.4 | 65.6 | -8.1 |
| 0.174 | 31.6 | 20.3 | 51.9 | 64.7 | -12.9 |
| 0.233 | 24.6 | 20.2 | 44.8 | 62.3 | -17.6 |
| 0.264 | 21.4 | 20.1 | 41.5 | 61.3 | -19.8 |
| 0.285 | 15.7 | 20.1 | 35.8 | 60.7 | -24.8 |
| 0.315 | 14.1 | 20.2 | 34.3 | 59.8 | -25.6 |

Average Data - vs - Average Limit

| Freq (MHz) | Amplitude (dBuV) | Factor (dB) | Adjusted (dBuV/m) | Spec. Limit (dBuV/m) | Compared to Spec. (dB) |
|------------|------------------|-------------|-------------------|----------------------|------------------------|
| 0.158 | 20.6 | 20.2 | 40.8 | 55.6 | -14.7 |
| 0.174 | 12.5 | 20.3 | 32.8 | 54.7 | -22.0 |
| 0.233 | 9.3 | 20.2 | 29.5 | 52.3 | -22.9 |
| 0.264 | 7.6 | 20.1 | 27.7 | 51.3 | -23.6 |
| 0.315 | 3.1 | 20.2 | 23.3 | 49.8 | -26.6 |
| 0.285 | 2.3 | 20.1 | 22.4 | 50.7 | -28.2 |

| | | | | | |
|---------------------|---|-------------------|------------------|--|------------------|
| Work Order: | MCSO1702 | Date: | 03/07/14 |  | |
| Project: | None | Temperature: | 24 °C | | |
| Job Site: | NC05 | Humidity: | 36% RH | | |
| Serial Number: | 41152140753 | Barometric Pres.: | 1023 mbar | Tested by: | Richard Mellroth |
| EUT: | 1631 | | | | |
| Configuration: | 2 | | | | |
| Customer: | Microsoft Corporation | | | | |
| Attendees: | None | | | | |
| EUT Power: | 110VAC/60Hz | | | | |
| Operating Mode: | Transmitting BLE ADV, Low Channel 0, 2402 MHz | | | | |
| Deviations: | None | | | | |
| Comments: | None | | | | |
| Test Specifications | FCC 15.207:2014 | Test Method | ANSI C63.10:2009 | | |



| Run # | 8 | Line: | Neutral | Ext. Attenuation: | 20 | Results | Pass |
|-------|---|-------|---------|-------------------|----|---------|------|
| | | | | | | | |

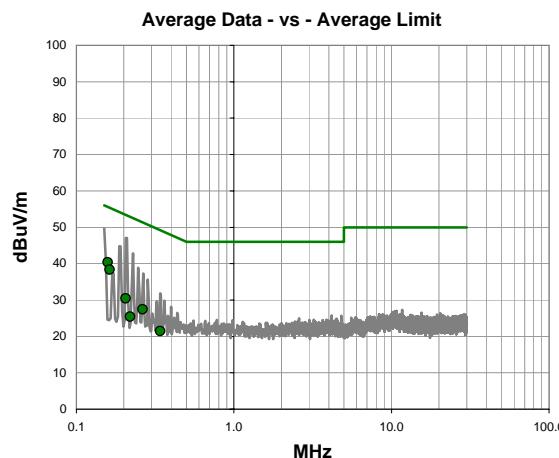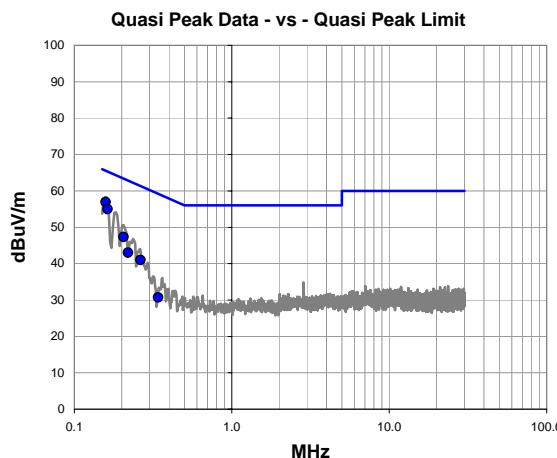

| Freq (MHz) | Amplitude (dBuV) | Factor (dB) | Adjusted (dBuV/m) | Spec. Limit (dBuV/m) | Compared to Spec. (dB) |
|------------|------------------|-------------|-------------------|----------------------|------------------------|
| 0.158 | 36.7 | 20.2 | 56.9 | 65.6 | -8.7 |
| 0.162 | 34.7 | 20.2 | 54.9 | 65.3 | -10.4 |
| 0.205 | 27.1 | 20.2 | 47.3 | 63.4 | -16.1 |
| 0.219 | 22.8 | 20.2 | 43.0 | 62.9 | -19.9 |
| 0.263 | 20.9 | 20.1 | 41.0 | 61.3 | -20.3 |
| 0.341 | 10.5 | 20.2 | 30.7 | 59.2 | -28.5 |

| Freq (MHz) | Amplitude (dBuV) | Factor (dB) | Adjusted (dBuV/m) | Spec. Limit (dBuV/m) | Compared to Spec. (dB) |
|------------|------------------|-------------|-------------------|----------------------|------------------------|
| 0.158 | 20.2 | 20.2 | 40.4 | 55.6 | -15.2 |
| 0.162 | 18.1 | 20.2 | 38.3 | 55.3 | -17.0 |
| 0.205 | 10.2 | 20.2 | 30.4 | 53.4 | -23.0 |
| 0.263 | 7.3 | 20.1 | 27.4 | 51.3 | -23.9 |
| 0.219 | 5.2 | 20.2 | 25.4 | 52.9 | -27.5 |
| 0.341 | 1.3 | 20.2 | 21.5 | 49.2 | -27.7 |

| | | | | | | | |
|---------------------|--|-------------------|-----------|---|----|---------|------|
| Work Order: | MCSO1702 | Date: | 03/07/14 |  Tested by: Richard Mellroth | | | |
| Project: | None | Temperature: | 24 °C | | | | |
| Job Site: | NC05 | Humidity: | 36% RH | | | | |
| Serial Number: | 41152140753 | Barometric Pres.: | 1023 mbar | | | | |
| EUT: | 1631 | | | | | | |
| Configuration: | 2 | | | | | | |
| Customer: | Microsoft Corporation | | | | | | |
| Attendees: | None | | | | | | |
| EUT Power: | 110VAC/60Hz | | | | | | |
| Operating Mode: | Transmitting BLE ADV, Mid Channel 12, 2426 MHz | | | | | | |
| Deviations: | None | | | | | | |
| Comments: | None | | | | | | |
| Test Specifications | | Test Method | | | | | |
| FCC 15.207:2014 | | ANSI C63.10:2009 | | | | | |
| Run # | 9 | Line: | High Line | Ext. Attenuation: | 20 | Results | Pass |

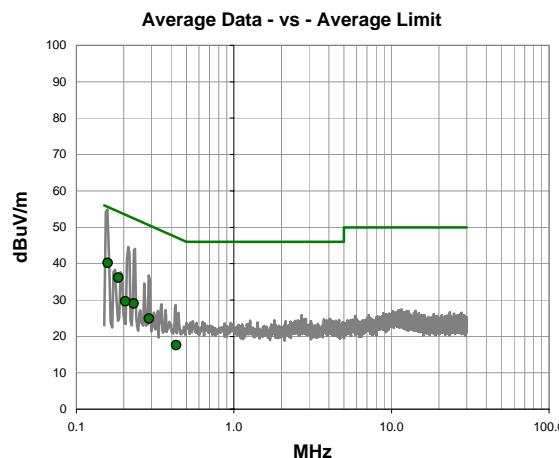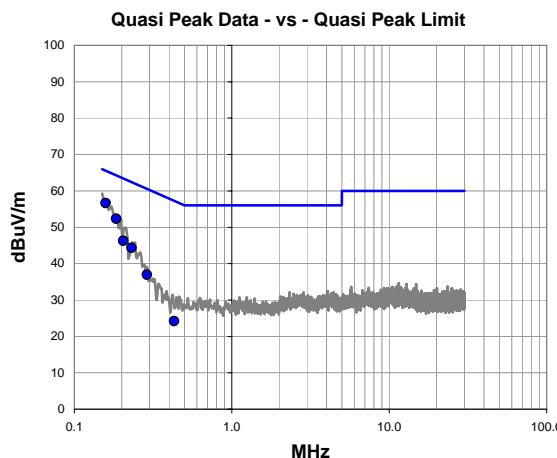



Quasi Peak Data - vs - Quasi Peak Limit

| Freq (MHz) | Amplitude (dBuV) | Factor (dB) | Adjusted (dBuV/m) | Spec. Limit (dBuV/m) | Compared to Spec. (dB) |
|------------|------------------|-------------|-------------------|----------------------|------------------------|
| 0.158 | 36.4 | 20.2 | 56.6 | 65.6 | -8.9 |
| 0.184 | 32.1 | 20.3 | 52.4 | 64.3 | -11.9 |
| 0.205 | 26.0 | 20.2 | 46.2 | 63.4 | -17.2 |
| 0.231 | 24.2 | 20.2 | 44.4 | 62.4 | -18.0 |
| 0.289 | 16.8 | 20.1 | 36.9 | 60.5 | -23.6 |
| 0.430 | 4.0 | 20.2 | 24.2 | 57.3 | -33.1 |

Average Data - vs - Average Limit

| Freq (MHz) | Amplitude (dBuV) | Factor (dB) | Adjusted (dBuV/m) | Spec. Limit (dBuV/m) | Compared to Spec. (dB) |
|------------|------------------|-------------|-------------------|----------------------|------------------------|
| 0.158 | 20.0 | 20.2 | 40.2 | 55.6 | -15.3 |
| 0.184 | 15.9 | 20.3 | 36.2 | 54.3 | -18.1 |
| 0.231 | 8.9 | 20.2 | 29.1 | 52.4 | -23.3 |
| 0.205 | 9.4 | 20.2 | 29.6 | 53.4 | -23.8 |
| 0.289 | 4.7 | 20.1 | 24.8 | 50.5 | -25.7 |
| 0.430 | -2.6 | 20.2 | 17.6 | 47.3 | -29.7 |

| | | | | | | | |
|---------------------|--|-------------------|-----------|---|----|---------|------|
| Work Order: | MCSO1702 | Date: | 03/07/14 |  Tested by: Richard Mellroth | | | |
| Project: | None | Temperature: | 24 °C | | | | |
| Job Site: | NC05 | Humidity: | 36% RH | | | | |
| Serial Number: | 41152140753 | Barometric Pres.: | 1023 mbar | | | | |
| EUT: | 1631 | | | | | | |
| Configuration: | 2 | | | | | | |
| Customer: | Microsoft Corporation | | | | | | |
| Attendees: | None | | | | | | |
| EUT Power: | 110VAC/60Hz | | | | | | |
| Operating Mode: | Transmitting BLE ADV, Mid Channel 12, 2426 MHz | | | | | | |
| Deviations: | None | | | | | | |
| Comments: | None | | | | | | |
| Test Specifications | | Test Method | | | | | |
| FCC 15.207:2014 | | ANSI C63.10:2009 | | | | | |
| Run # | 10 | Line: | Neutral | Ext. Attenuation: | 20 | Results | Pass |

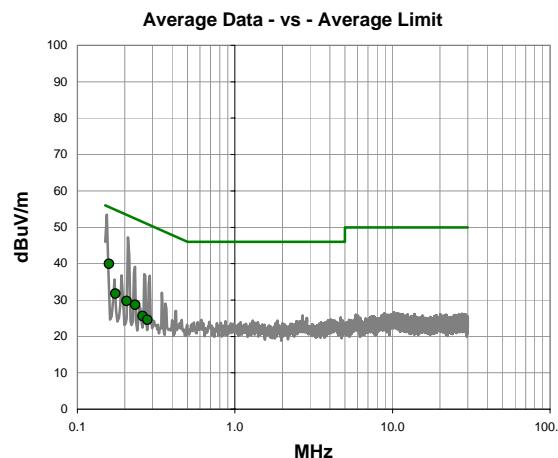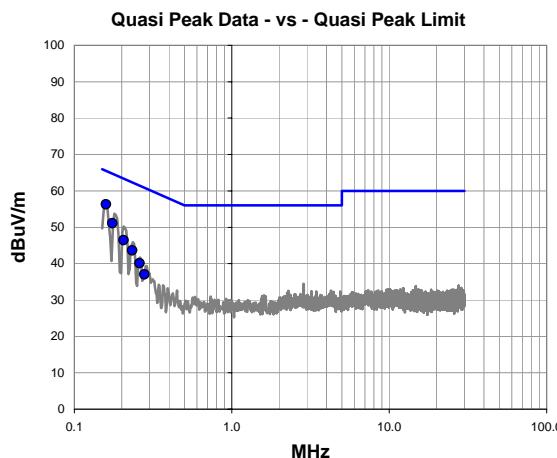



Quasi Peak Data - vs - Quasi Peak Limit

| Freq (MHz) | Amplitude (dBuV) | Factor (dB) | Adjusted (dBuV/m) | Spec. Limit (dBuV/m) | Compared to Spec. (dB) |
|------------|------------------|-------------|-------------------|----------------------|------------------------|
| 0.159 | 36.1 | 20.2 | 56.3 | 65.5 | -9.2 |
| 0.174 | 30.8 | 20.3 | 51.1 | 64.8 | -13.7 |
| 0.205 | 26.2 | 20.2 | 46.4 | 63.4 | -17.0 |
| 0.233 | 23.5 | 20.2 | 43.7 | 62.3 | -18.7 |
| 0.259 | 20.0 | 20.1 | 40.1 | 61.5 | -21.3 |
| 0.278 | 16.9 | 20.1 | 37.0 | 60.9 | -23.8 |

Average Data - vs - Average Limit

| Freq (MHz) | Amplitude (dBuV) | Factor (dB) | Adjusted (dBuV/m) | Spec. Limit (dBuV/m) | Compared to Spec. (dB) |
|------------|------------------|-------------|-------------------|----------------------|------------------------|
| 0.159 | 19.7 | 20.2 | 39.9 | 55.5 | -15.6 |
| 0.174 | 11.5 | 20.3 | 31.8 | 54.8 | -23.0 |
| 0.205 | 9.5 | 20.2 | 29.7 | 53.4 | -23.7 |
| 0.233 | 8.5 | 20.2 | 28.7 | 52.3 | -23.7 |
| 0.259 | 5.5 | 20.1 | 25.6 | 51.5 | -25.8 |
| 0.278 | 4.4 | 20.1 | 24.5 | 50.9 | -26.3 |

| | | | | | |
|---------------------|---|-------------------|------------------|-------------------|------------------|
| Work Order: | MCSO1702 | Date: | 03/07/14 | | |
| Project: | None | Temperature: | 24 °C | | |
| Job Site: | NC05 | Humidity: | 36% RH | | |
| Serial Number: | 41152140753 | Barometric Pres.: | 1023 mbar | Tested by: | Richard Mellroth |
| EUT: | 1631 | | | | |
| Configuration: | 2 | | | | |
| Customer: | Microsoft Corporation | | | | |
| Attendees: | None | | | | |
| EUT Power: | 110VAC/60Hz | | | | |
| Operating Mode: | Transmitting BLE ADV, High Channel 39, 2480 MHz | | | | |
| Deviations: | None | | | | |
| Comments: | None | | | | |
| Test Specifications | FCC 15.207:2014 | Test Method | ANSI C63.10:2009 | | |
| Run # | 11 | Line: | High Line | Ext. Attenuation: | 20 |
| | | | | Results | Pass |

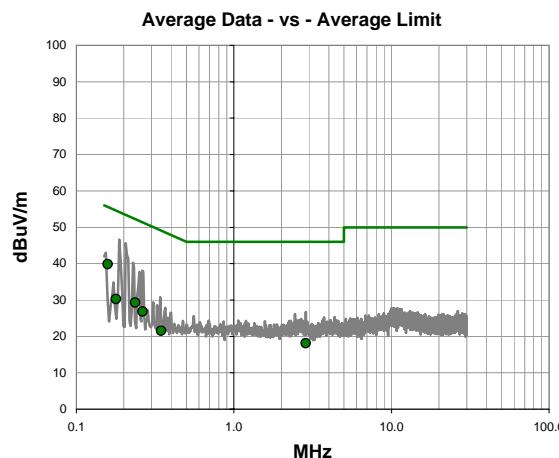
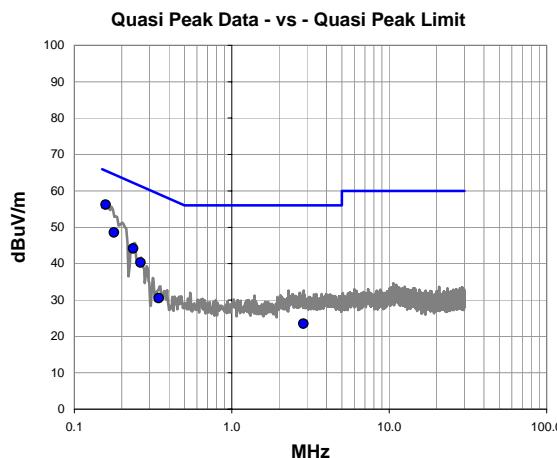


| Freq (MHz) | Amplitude (dBuV) | Factor (dB) | Adjusted (dBuV/m) | Spec. Limit (dBuV/m) | Compared to Spec. (dB) |
|------------|------------------|-------------|-------------------|----------------------|------------------------|
| 0.158 | 36.0 | 20.2 | 56.2 | 65.5 | -9.3 |
| 0.178 | 28.3 | 20.3 | 48.6 | 64.6 | -16.0 |
| 0.236 | 24.0 | 20.2 | 44.2 | 62.2 | -18.1 |
| 0.263 | 20.2 | 20.1 | 40.3 | 61.3 | -21.0 |
| 0.345 | 10.3 | 20.2 | 30.5 | 59.1 | -28.6 |
| 2.856 | 3.2 | 20.3 | 23.5 | 56.0 | -32.5 |

| Freq (MHz) | Amplitude (dBuV) | Factor (dB) | Adjusted (dBuV/m) | Spec. Limit (dBuV/m) | Compared to Spec. (dB) |
|------------|------------------|-------------|-------------------|----------------------|------------------------|
| 0.158 | 19.6 | 20.2 | 39.8 | 55.5 | -15.7 |
| 0.236 | 9.1 | 20.2 | 29.3 | 52.2 | -23.0 |
| 0.178 | 10.0 | 20.3 | 30.3 | 54.6 | -24.3 |
| 0.263 | 6.7 | 20.1 | 26.8 | 51.3 | -24.5 |
| 0.345 | 1.4 | 20.2 | 21.6 | 49.1 | -27.5 |
| 2.856 | -2.2 | 20.3 | 18.1 | 46.0 | -27.9 |

| | | | | | |
|---------------------|---|-------------------|------------------|---|--|
| Work Order: | MCSO1702 | Date: | 03/07/14 |  Tested by: Richard Mellroth | |
| Project: | None | Temperature: | 24 °C | | |
| Job Site: | NC05 | Humidity: | 36% RH | | |
| Serial Number: | 41152140753 | Barometric Pres.: | 1023 mbar | | |
| EUT: | 1631 | | | | |
| Configuration: | 2 | | | | |
| Customer: | Microsoft Corporation | | | | |
| Attendees: | None | | | | |
| EUT Power: | 110VAC/60Hz | | | | |
| Operating Mode: | Transmitting BLE ADV, High Channel 39, 2480 MHz | | | | |
| Deviations: | None | | | | |
| Comments: | None | | | | |
| Test Specifications | FCC 15.207:2014 | Test Method | ANSI C63.10:2009 | | |

| Run # | 12 | Line: | Neutral | Ext. Attenuation: | 20 | Results | Pass |
|-------|----|-------|---------|-------------------|----|---------|------|
| | | | | | | | |

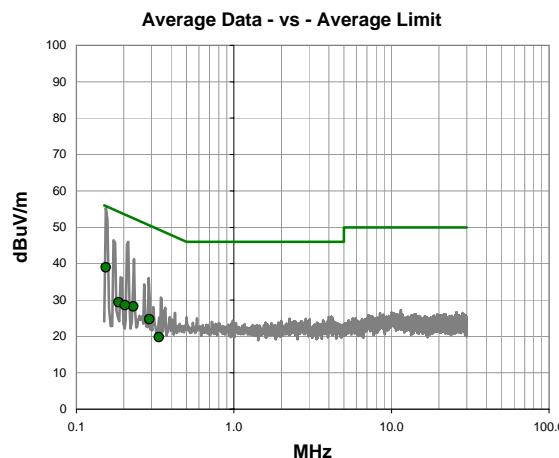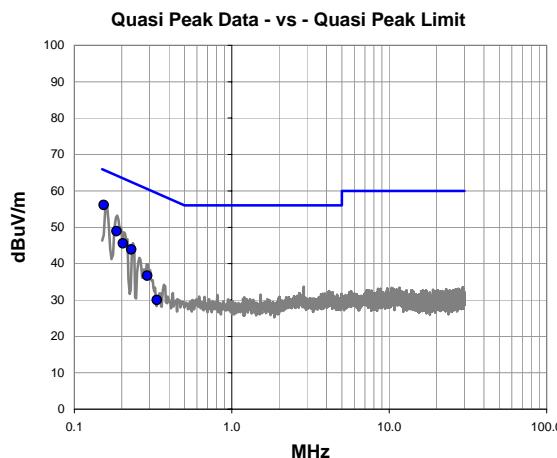

| Freq (MHz) | Amplitude (dBuV) | Factor (dB) | Adjusted (dBuV/m) | Spec. Limit (dBuV/m) | Compared to Spec. (dB) |
|------------|------------------|-------------|-------------------|----------------------|------------------------|
| 0.154 | 35.9 | 20.2 | 56.1 | 65.8 | -9.7 |
| 0.185 | 28.6 | 20.3 | 48.9 | 64.3 | -15.4 |
| 0.204 | 25.3 | 20.2 | 45.5 | 63.4 | -17.9 |
| 0.230 | 23.7 | 20.2 | 43.9 | 62.4 | -18.6 |
| 0.290 | 16.5 | 20.2 | 36.7 | 60.5 | -23.9 |
| 0.335 | 9.8 | 20.2 | 30.0 | 59.3 | -29.4 |

| Freq (MHz) | Amplitude (dBuV) | Factor (dB) | Adjusted (dBuV/m) | Spec. Limit (dBuV/m) | Compared to Spec. (dB) |
|------------|------------------|-------------|-------------------|----------------------|------------------------|
| 0.154 | 18.8 | 20.2 | 39.0 | 55.8 | -16.8 |
| 0.230 | 8.1 | 20.2 | 28.3 | 52.4 | -24.2 |
| 0.185 | 9.1 | 20.3 | 29.4 | 54.3 | -24.9 |
| 0.204 | 8.3 | 20.2 | 28.5 | 53.4 | -24.9 |
| 0.290 | 4.6 | 20.2 | 24.8 | 50.5 | -25.8 |
| 0.335 | -0.4 | 20.2 | 19.8 | 49.3 | -29.6 |