


2TX Antenna 1 + Antenna 2 MODE: 484-Tones, RU index 65

BANDEDGE (LOW CHANNEL, CH 3)

HORIZONTAL RESULT

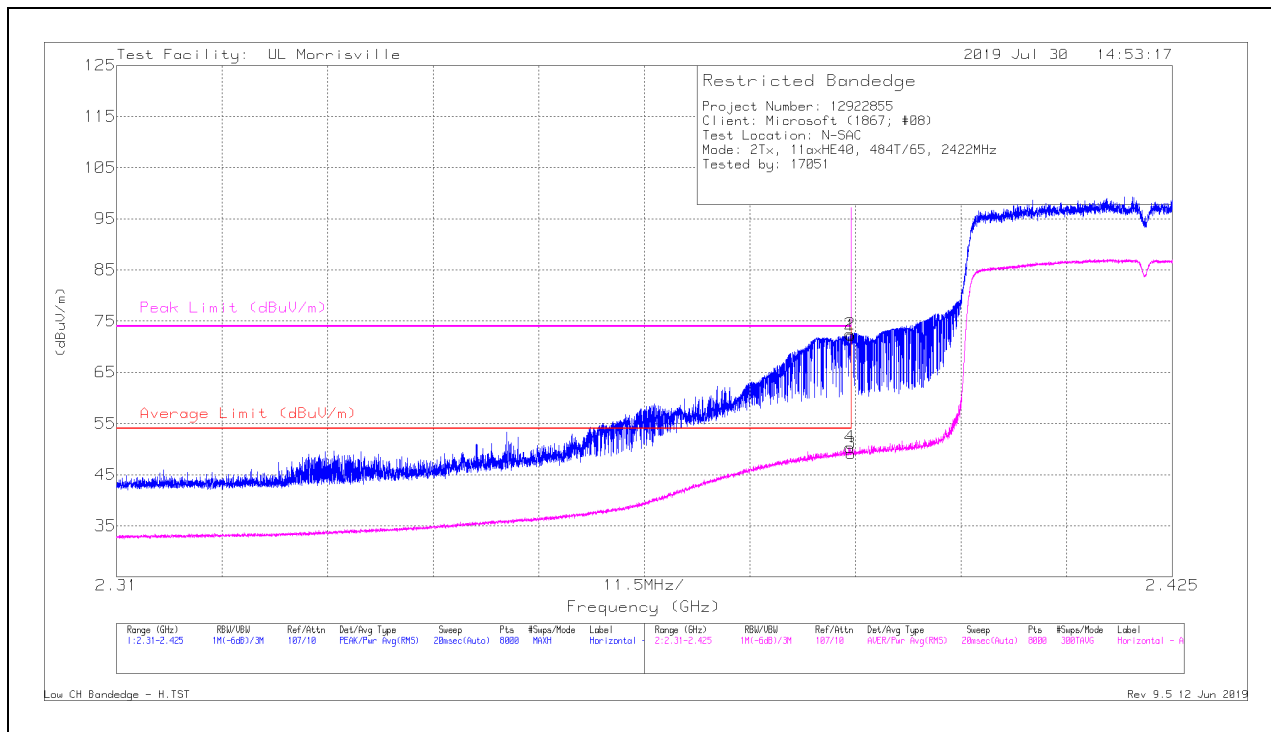

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.38999	64.62	Pk	32	-24.4	72.22	-	-	74	-1.78	16	363	H
2	* ** 2.38991	64.86	Pk	32	-24.4	72.46	-	-	74	-1.54	16	363	H
3	* ** 2.38999	41.57	RMS	32	-24.4	49.17	54	-4.83	-	-	16	363	H
4	* ** 2.38988	42.78	RMS	32	-24.4	50.38	54	-3.62	-	-	16	363	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

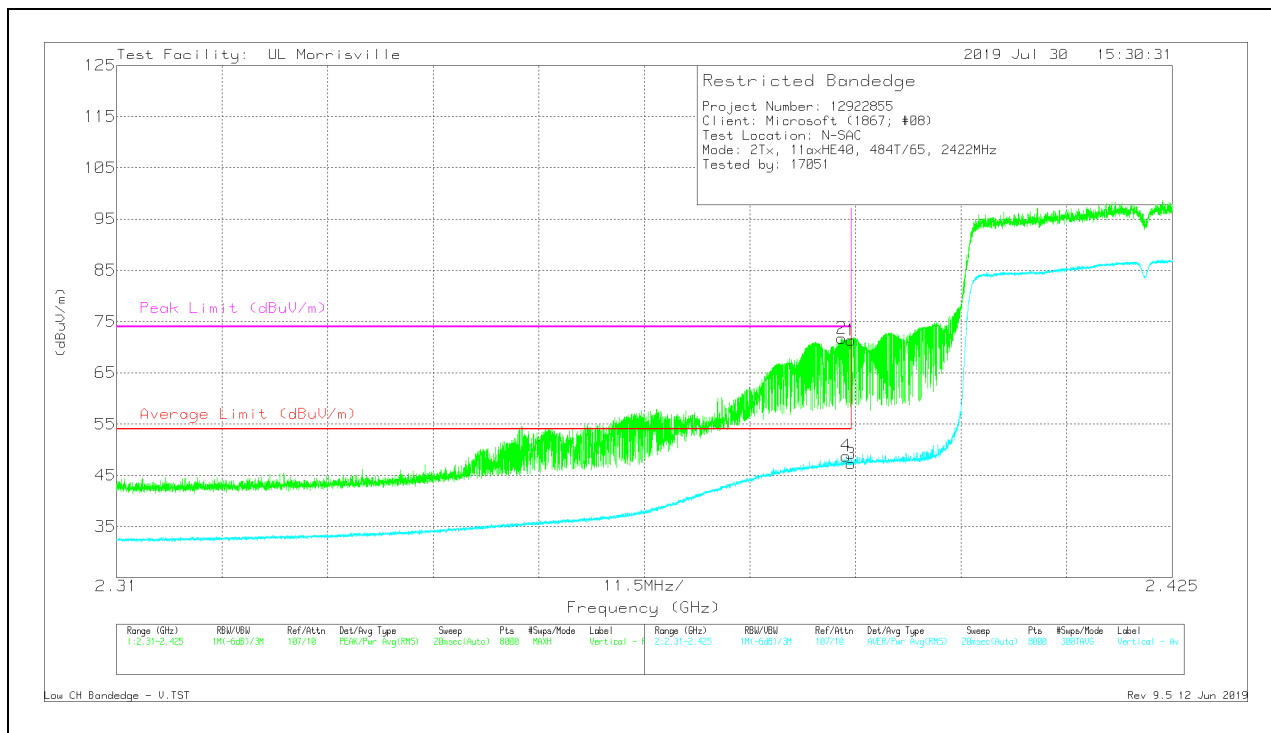

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.38999	63.76	Pk	32	-24.4	71.36	-	-	74	-2.64	112	346	V
2	* ** 2.389	64.16	Pk	32	-24.4	71.76	-	-	74	-2.24	112	346	V
3	* ** 2.38999	39.64	RMS	32	-24.4	47.24	54	-6.76	-	-	112	346	V
4	* ** 2.38945	41.2	RMS	32	-24.4	48.8	54	-5.2	-	-	112	346	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 4)

HORIZONTAL RESULT

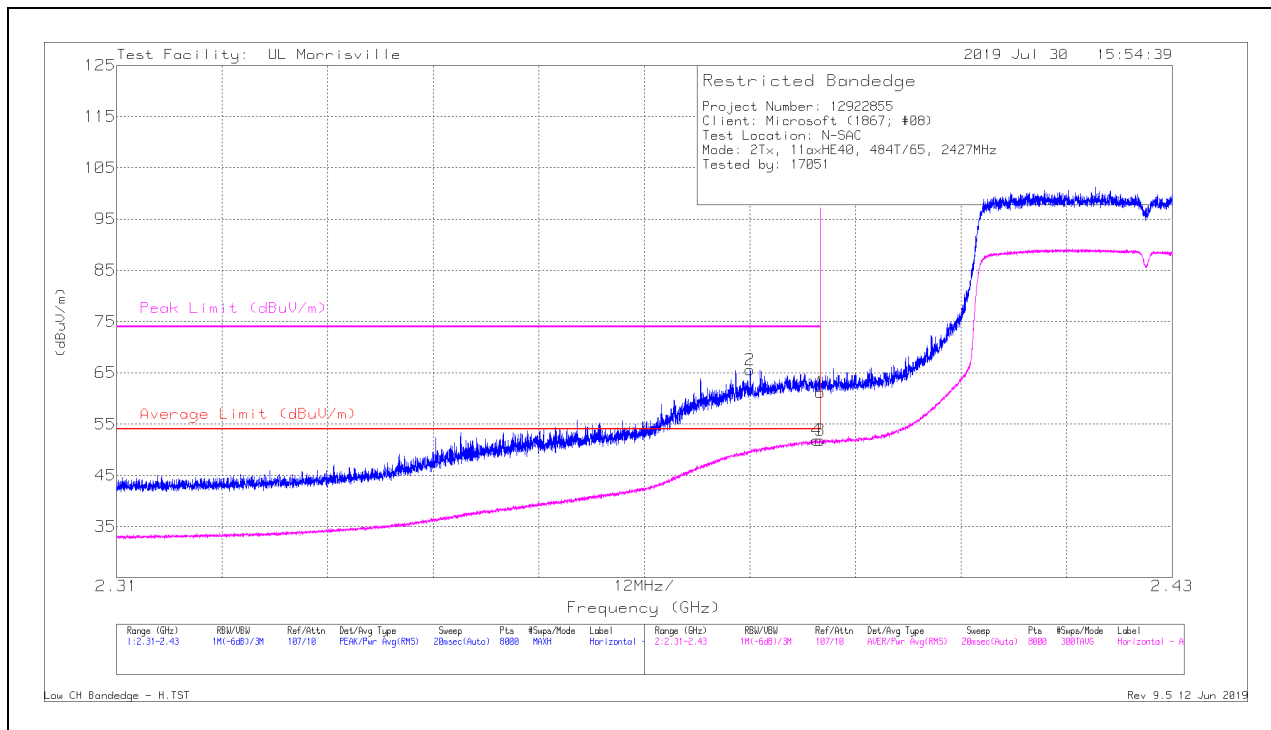

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.38999	53.58	Pk	32	-24.4	61.18	-	-	74	-12.82	17	364	H
2	* ** 2.38198	58.01	Pk	32	-24.4	65.61	-	-	74	-8.39	17	364	H
3	* ** 2.38999	44.24	RMS	32	-24.4	51.84	54	-2.16	-	-	17	364	H
4	* ** 2.3896	44.26	RMS	32	-24.4	51.86	54	-2.14	-	-	17	364	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

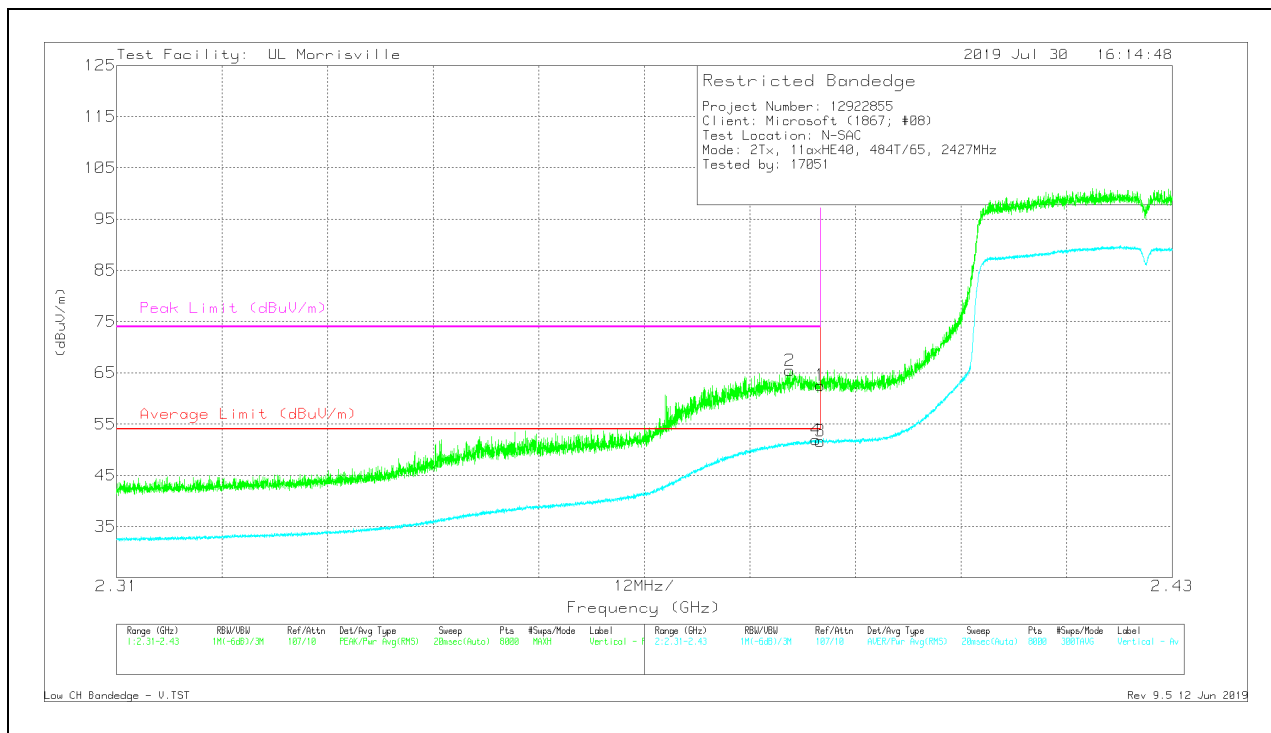

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.38999	54.95	Pk	32	-24.4	62.55	-	-	74	-11.45	113	347	V
2	* ** 2.38653	57.83	Pk	32	-24.4	65.43	-	-	74	-8.57	113	347	V
3	* ** 2.38999	44.05	RMS	32	-24.4	51.65	54	-2.35	-	-	113	347	V
4	* ** 2.38951	44.35	RMS	32	-24.4	51.95	54	-2.05	-	-	113	347	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 9)

HORIZONTAL RESULT

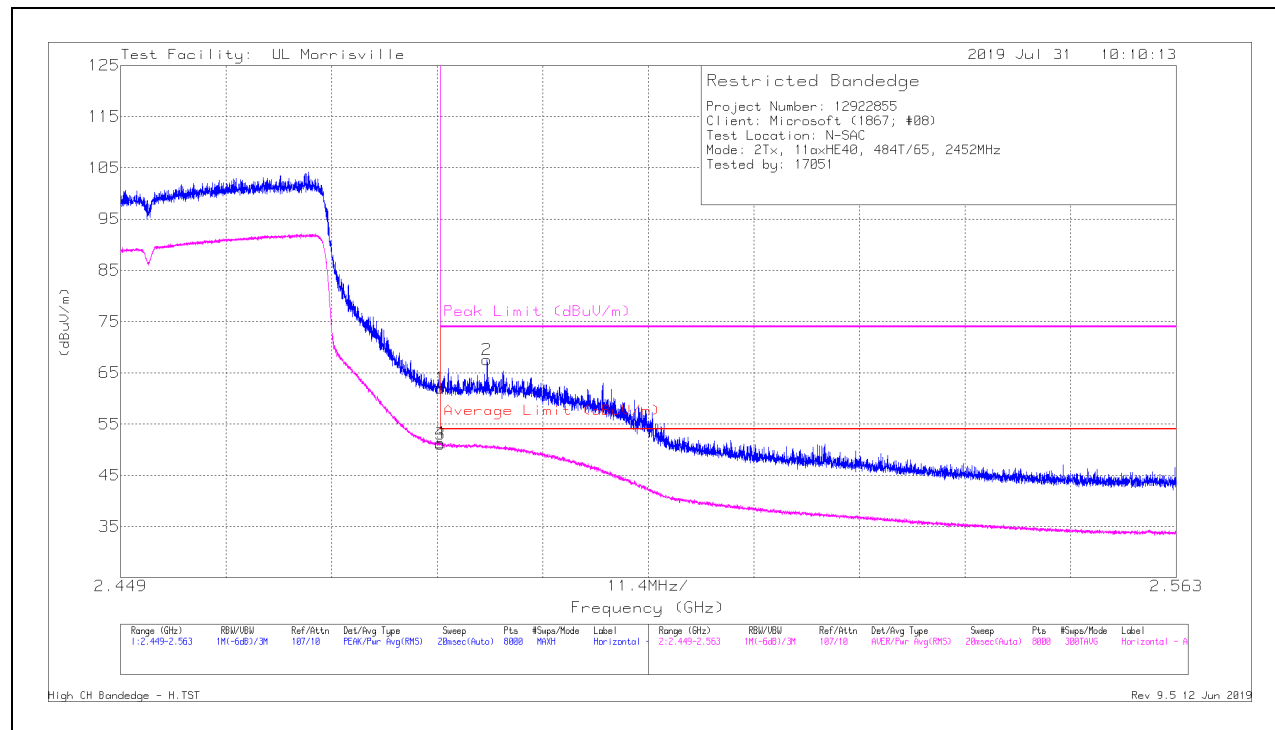

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.4835	53.94	Pk	32.4	-24.3	62.04	-	-	74	-11.96	21	380	H
2	* ** 2.48854	59.45	Pk	32.4	-24.3	67.55	-	-	74	-6.45	21	380	H
3	* ** 2.4835	42.95	RMS	32.4	-24.3	51.05	54	-2.95	-	-	21	380	H
4	* ** 2.48352	43.22	RMS	32.4	-24.3	51.32	54	-2.68	-	-	21	380	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

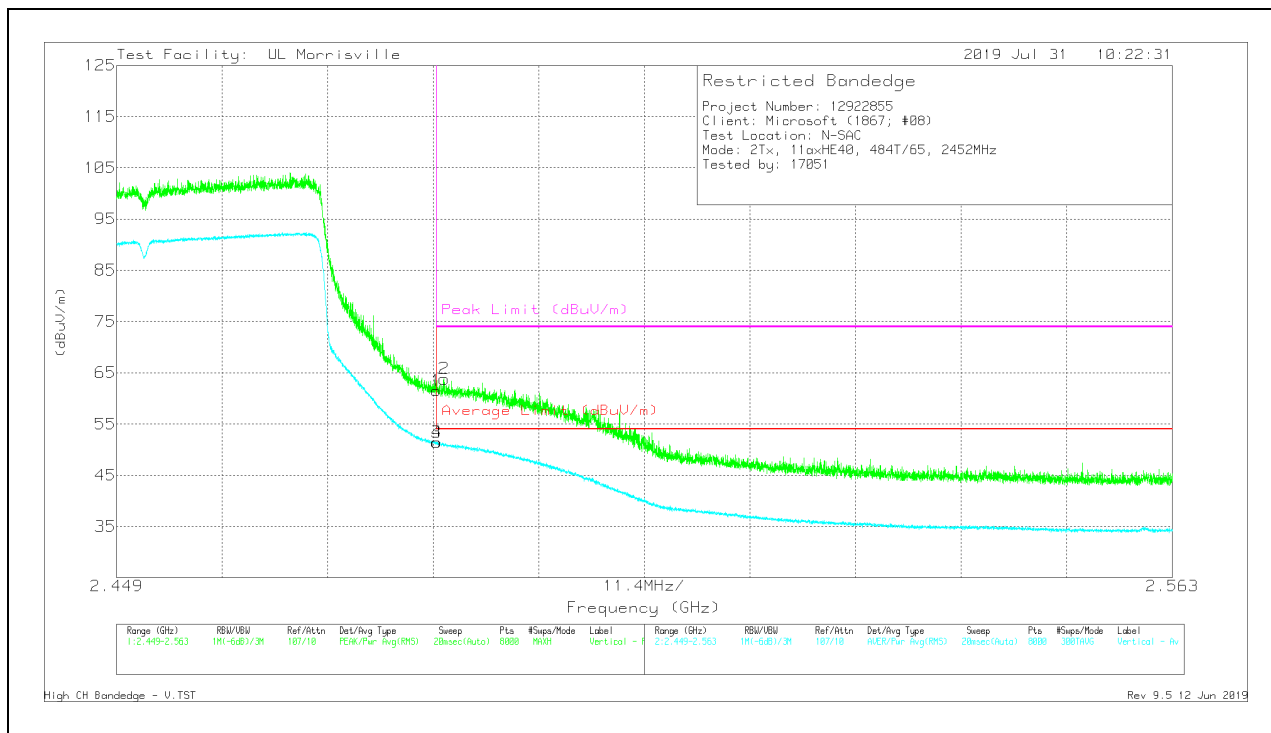

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.4835	53.39	Pk	32.4	-24.3	61.49	-	-	74	-12.51	6	391	V
2	*** 2.48437	55.71	Pk	32.4	-24.3	63.81	-	-	74	-10.19	6	391	V
3	*** 2.4835	43.36	RMS	32.4	-24.3	51.46	54	-2.54	-	-	6	391	V
4	*** 2.48359	43.32	RMS	32.4	-24.3	51.42	54	-2.58	-	-	6	391	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 10)

HORIZONTAL RESULT

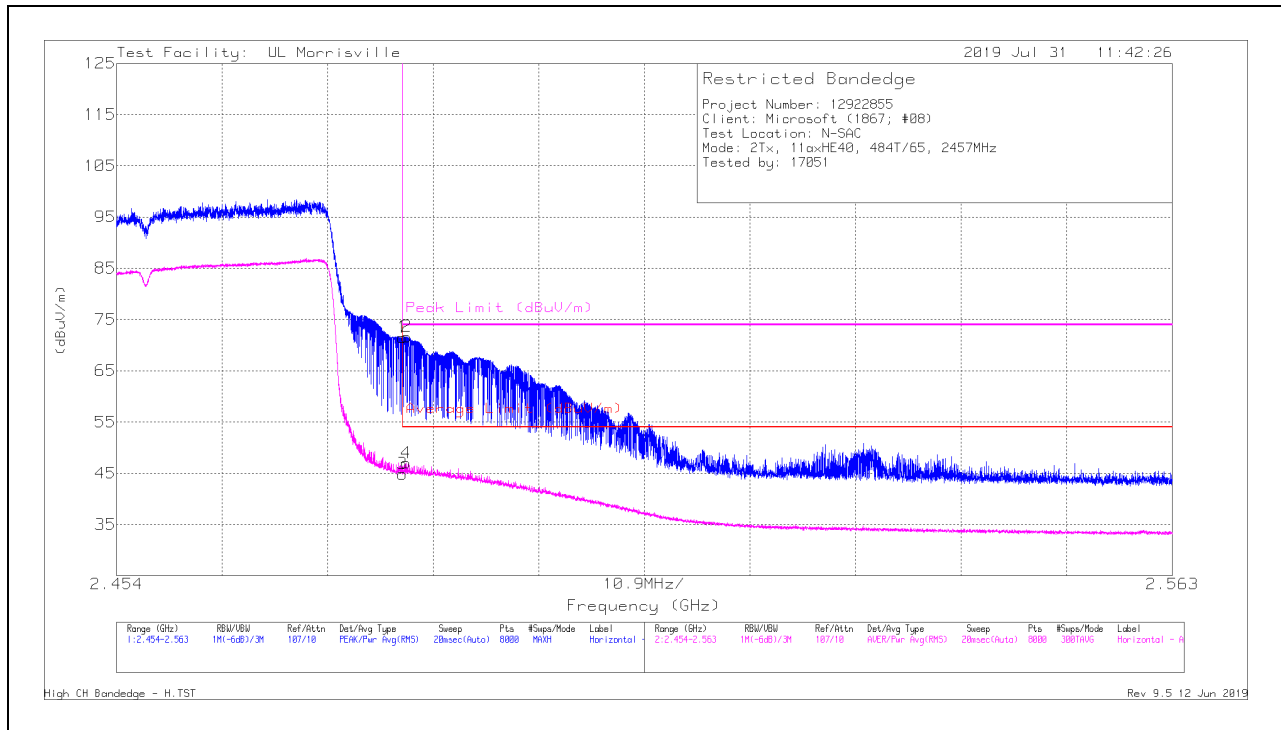

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.4835	63.43	Pk	32.4	-24.3	71.53	-	-	74	-2.47	33	380	H
2	* ** 2.48394	63.57	Pk	32.4	-24.3	71.67	-	-	74	-2.33	33	380	H
3	* ** 2.4835	36.78	RMS	32.4	-24.3	44.88	54	-9.12	-	-	33	380	H
4	* ** 2.48388	38.92	RMS	32.4	-24.3	47.02	54	-6.98	-	-	33	380	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

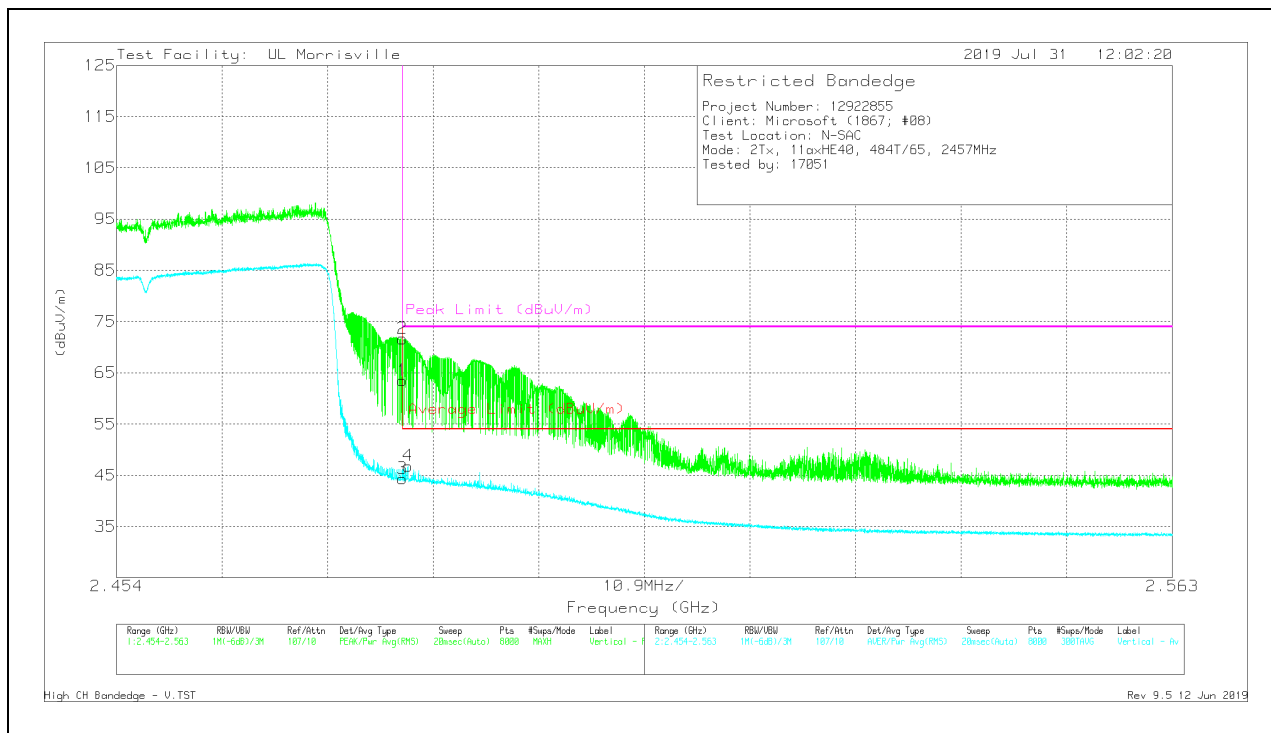

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.4835	55.43	Pk	32.4	-24.3	63.53	-	-	74	-10.47	122	400	V
2	*** 2.48353	63.58	Pk	32.4	-24.3	71.68	-	-	74	-2.32	122	400	V
3	*** 2.4835	36.27	RMS	32.4	-24.3	44.37	54	-9.63	-	-	122	400	V
4	*** 2.4841	38.74	RMS	32.4	-24.3	46.84	54	-7.16	-	-	122	400	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)

HORIZONTAL RESULT

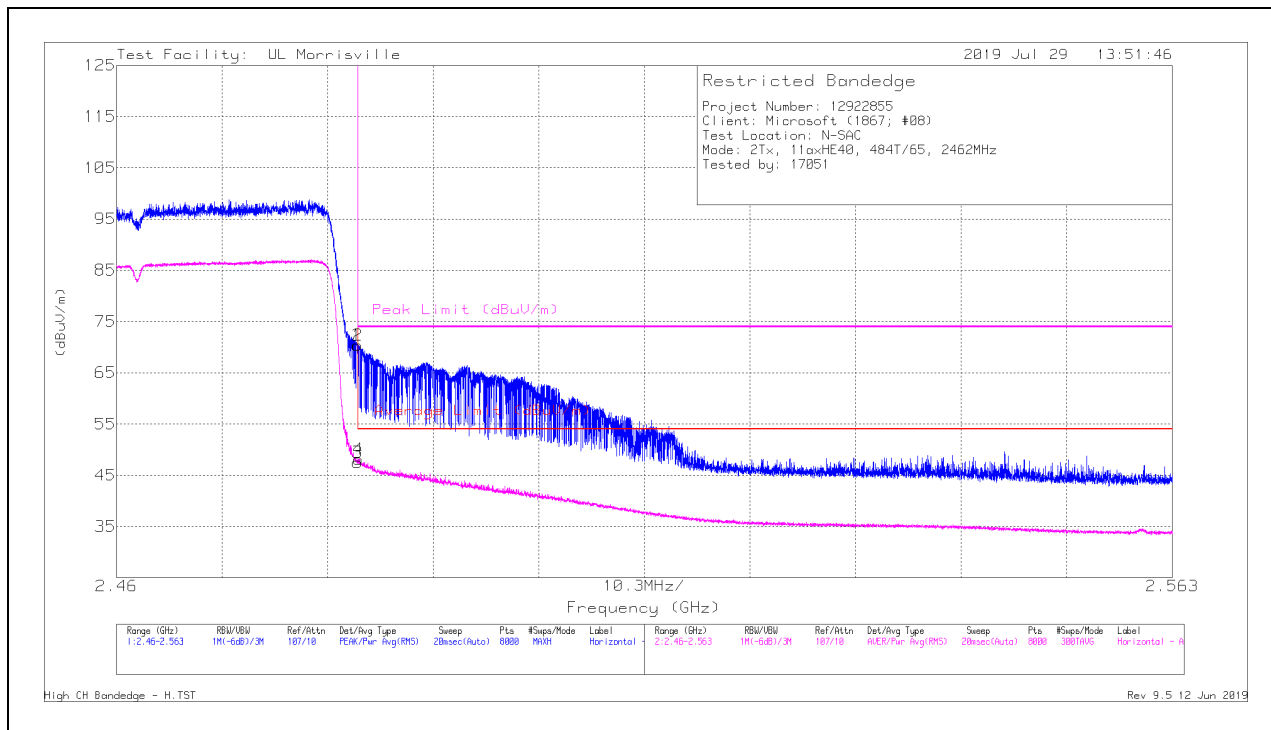

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.4835	62.24	Pk	32.4	-24.3	70.34	-	-	74	-3.66	19	379	H
2	* ** 2.48353	62.25	Pk	32.4	-24.3	70.35	-	-	74	-3.65	19	379	H
3	* ** 2.4835	39.43	RMS	32.4	-24.3	47.53	54	-6.47	-	-	19	379	H
4	* ** 2.48362	40.03	RMS	32.4	-24.3	48.13	54	-5.87	-	-	19	379	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

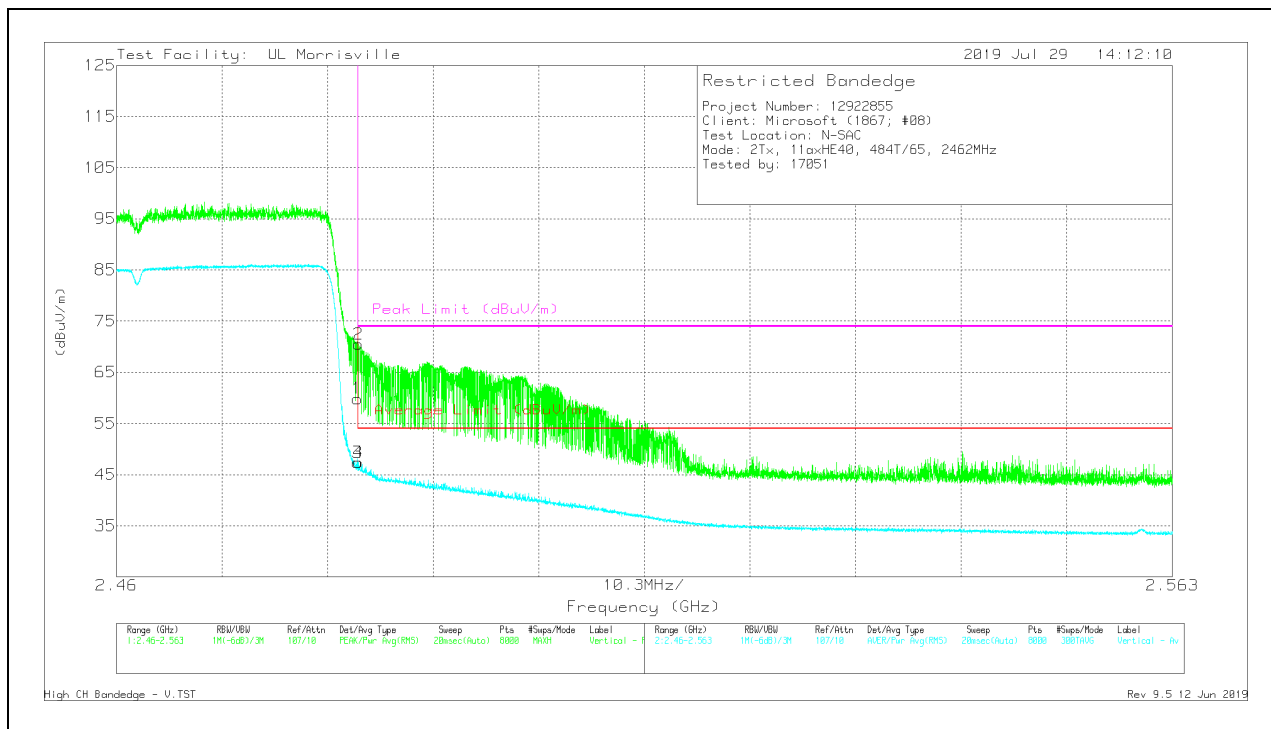

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.4835	51.77	Pk	32.4	-24.3	59.87	-	-	74	-14.13	6	382	V
2	* ** 2.48358	62.42	Pk	32.4	-24.3	70.52	-	-	74	-3.48	6	382	V
3	* ** 2.4835	39.27	RMS	32.4	-24.3	47.37	54	-6.63	-	-	6	382	V
4	* ** 2.4836	39.29	RMS	32.4	-24.3	47.39	54	-6.61	-	-	6	382	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band



Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

Note – Radiated Spurious plots were run with all channels set to mid channel power settings.

LOW CHANNEL, CH 3 RESULTS

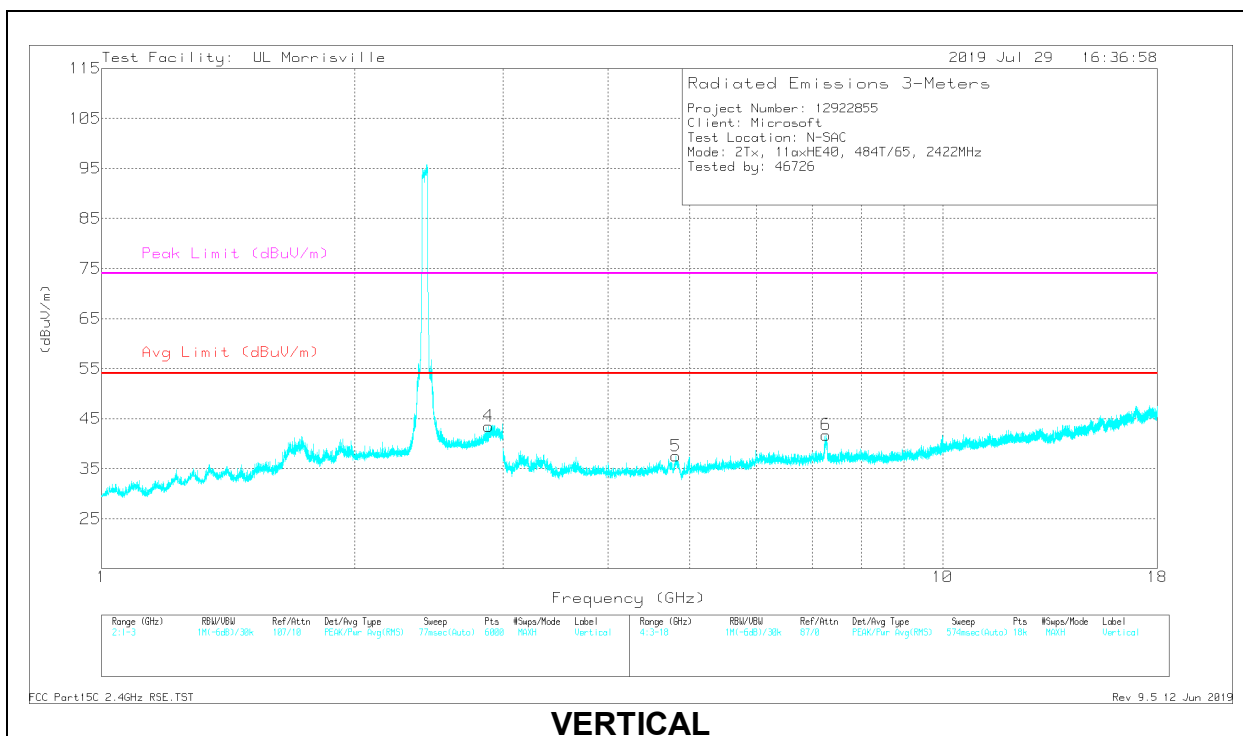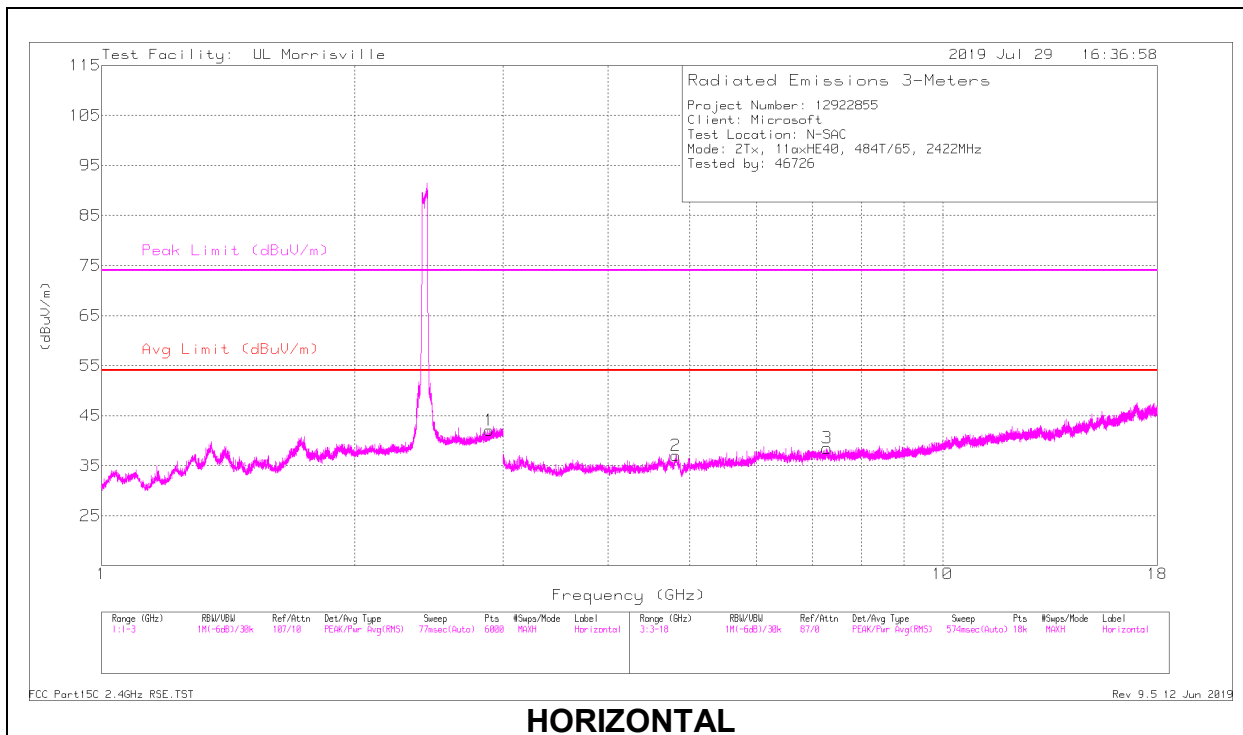

RADIATED EMISSIONS

Markers	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.89639	39.8	PK2	32.6	-23.5	48.9	-	-	74	-25.1	297	118	H
	* ** 2.89641	27.75	MAv1	32.6	-23.5	36.85	54	-17.15	-	-	297	118	H
4	* ** 2.8673	41.75	PK2	32.5	-23.6	50.65	-	-	74	-23.35	35	226	V
	* ** 2.86745	29.64	MAv1	32.5	-23.6	38.54	54	-15.46	-	-	35	226	V
2	* ** 4.82113	42.24	PK2	34.1	-31.5	44.84	-	-	74	-29.16	331	298	H
	* ** 4.82118	29.09	MAv1	34.1	-31.5	31.69	54	-22.31	-	-	331	298	H
3	* ** 7.2687	39.88	PK2	35.6	-29.3	46.18	-	-	74	-27.82	271	328	H
	* ** 7.26863	27.79	MAv1	35.6	-29.3	34.09	54	-19.91	-	-	271	328	H
5	* ** 4.81834	42.15	PK2	34.1	-31.5	44.75	-	-	74	-29.25	277	276	V
	* ** 4.81836	29.52	MAv1	34.1	-31.5	32.12	54	-21.88	-	-	277	276	V
6	* ** 7.27605	43.63	PK2	35.6	-29.2	50.03	-	-	74	-23.97	314	242	V
	* ** 7.27607	31.05	MAv1	35.6	-29.2	37.45	54	-16.55	-	-	314	242	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK2 - Maximum Peak

MAv1 - Maximum RMS Average

MID CHANNEL, CH 6 RESULTS

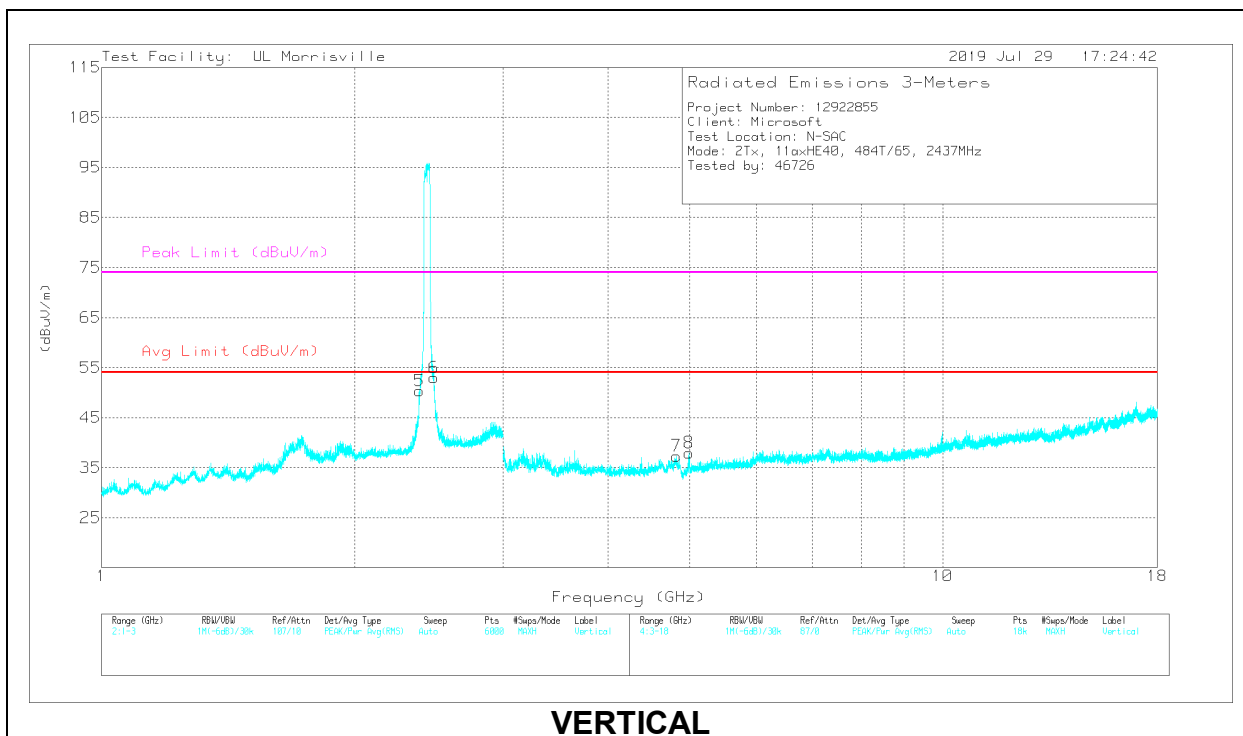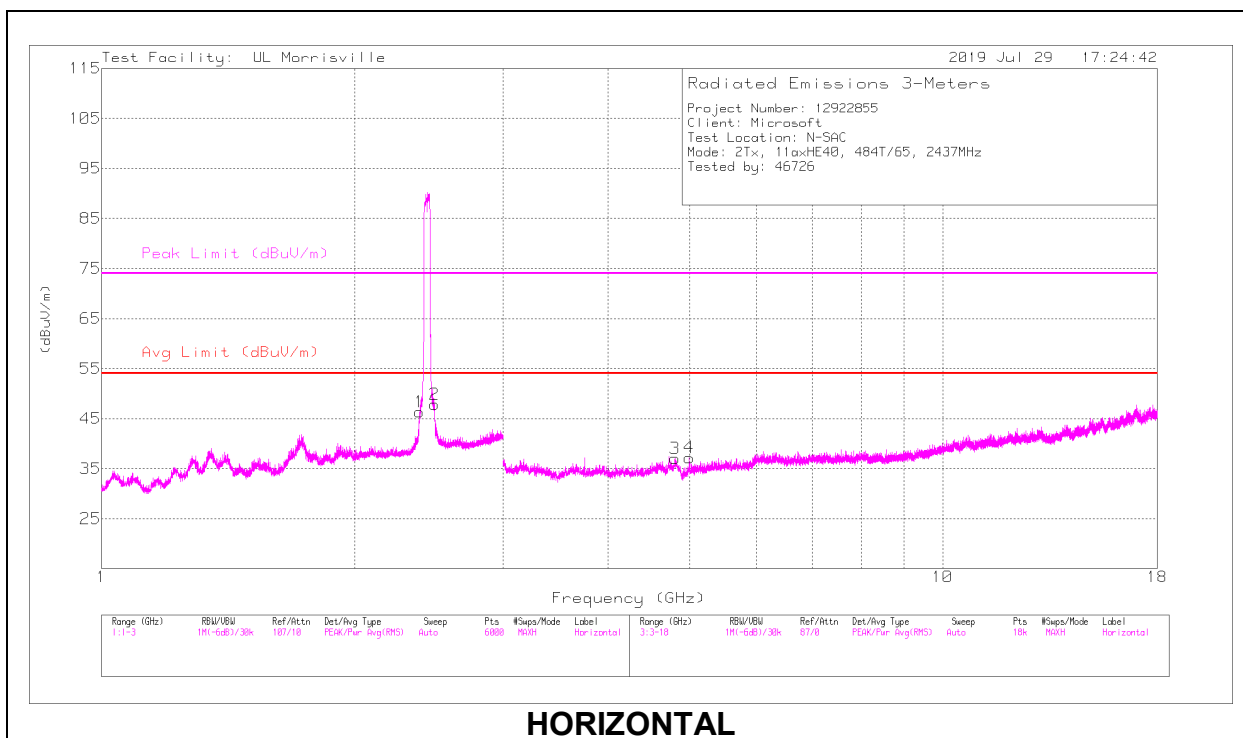

RADIATED EMISSIONS

Markers	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.38947	49.28	PK2	32	-24.4	56.88	-	-	74	-17.12	28	263	H
	*** 2.38955	34.78	MAv1	32	-24.4	42.38	54	-11.62	-	-	28	263	H
2	*** 2.48562	48.56	PK2	32.4	-24.3	56.66	-	-	74	-17.34	212	204	H
	*** 2.48561	33.81	MAv1	32.4	-24.3	41.91	54	-12.09	-	-	212	204	H
5	*** 2.38968	53.95	PK2	32	-24.4	61.55	-	-	74	-12.45	133	115	V
	*** 2.38968	39.31	MAv1	32	-24.4	46.91	54	-7.09	-	-	133	115	V
6	*** 2.48568	53.48	PK2	32.4	-24.3	61.58	-	-	74	-12.42	111	176	V
	*** 2.48567	39.09	MAv1	32.4	-24.3	47.19	54	-6.81	-	-	111	176	V
3	*** 4.80032	41.72	PK2	34.1	-31.6	44.22	-	-	74	-29.78	178	270	H
	*** 4.80032	29.34	MAv1	34.1	-31.6	31.84	54	-22.16	-	-	178	270	H
4	*** 4.99047	41.95	PK2	34	-32.6	43.35	-	-	74	-30.65	227	137	H
	*** 4.98996	28.92	MAv1	34	-32.6	30.32	54	-23.68	-	-	227	137	H
7	*** 4.74015	41.11	PK2	33.9	-32	43.01	-	-	74	-30.99	215	359	V
	*** 4.74055	28.49	MAv1	33.9	-32	30.39	54	-23.61	-	-	215	359	V
8	*** 4.98994	43.87	PK2	34	-32.6	45.27	-	-	74	-28.73	47	105	V
	*** 4.98994	29.91	MAv1	34	-32.6	31.31	54	-22.69	-	-	47	105	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK2 - Maximum Peak

MAv1 - Maximum RMS Average

HIGH CHANNEL, CH 11 RESULTS

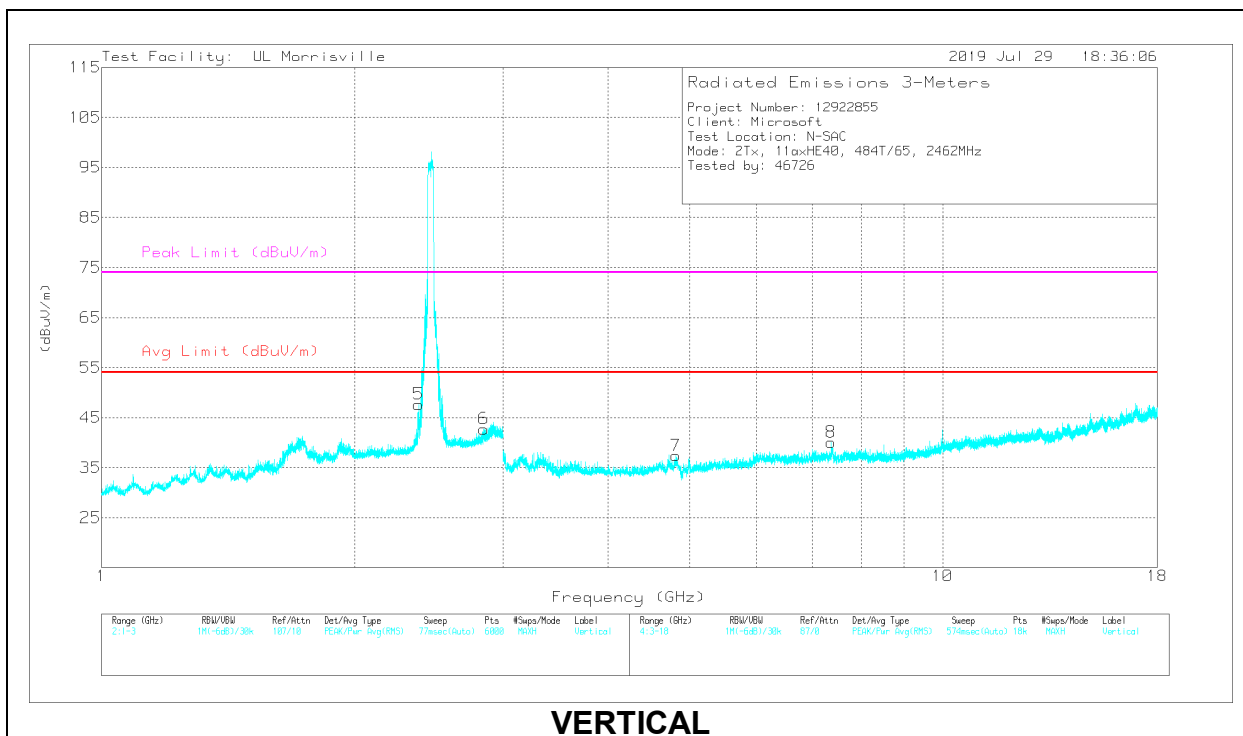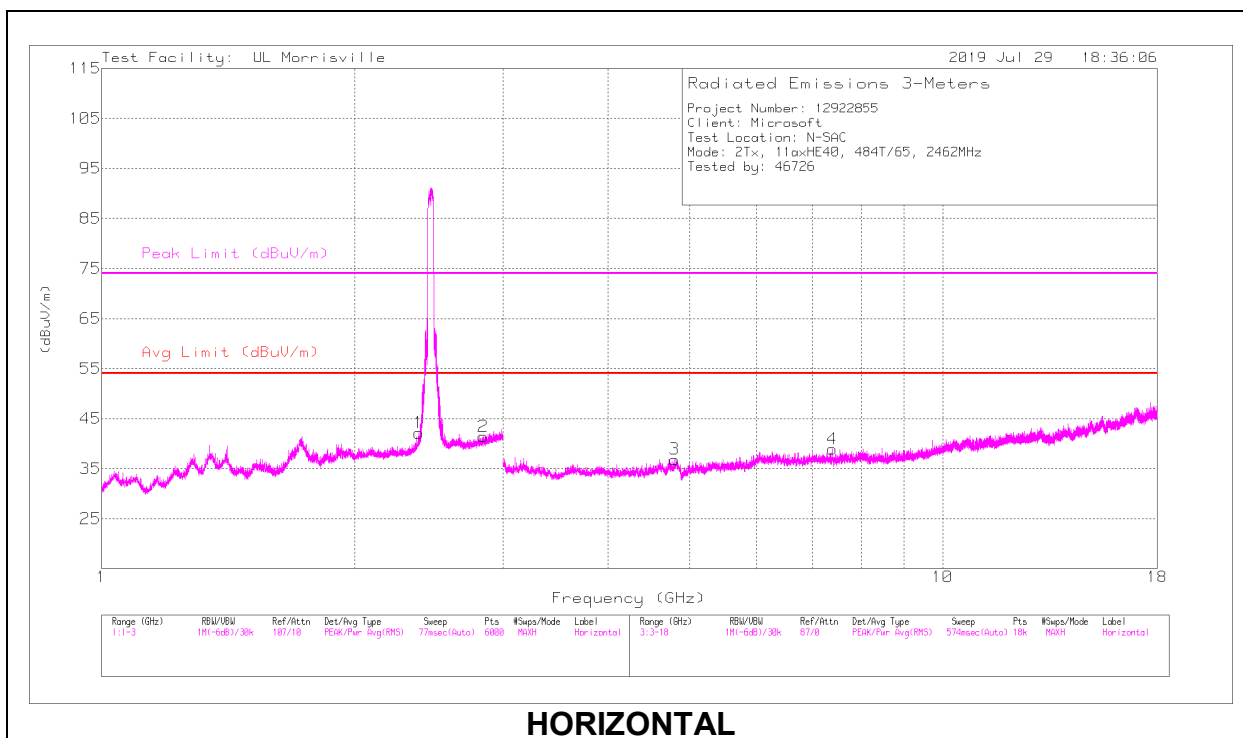

RADIATED EMISSIONS

Markers	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.38522	46.23	PK2	32	-24.4	53.83	-	-	74	-20.17	79	274	H
	*** 2.38513	28.08	MAv1	32	-24.4	35.68	54	-18.32	-	-	79	274	H
2	*** 2.84097	38.66	PK2	32.4	-23.6	47.46	-	-	74	-26.54	302	254	H
	*** 2.84098	25.92	MAv1	32.4	-23.6	34.72	54	-19.28	-	-	302	254	H
5	*** 2.3819	51.46	PK2	32	-24.4	59.06	-	-	74	-14.94	131	116	V
	*** 2.38184	30.1	MAv1	32	-24.4	37.7	54	-16.3	-	-	131	116	V
6	*** 2.85289	41.93	PK2	32.4	-23.6	50.73	-	-	74	-23.27	29	205	V
	*** 2.85291	29.74	MAv1	32.4	-23.6	38.54	54	-15.46	-	-	29	205	V
3	*** 4.81224	41.88	PK2	34.1	-31.6	44.38	-	-	74	-29.62	203	218	H
	*** 4.81263	29.72	MAv1	34.1	-31.6	32.22	54	-21.78	-	-	203	218	H
4	*** 7.38346	38.31	PK2	35.6	-29.2	44.71	-	-	74	-29.29	281	339	H
	*** 7.38344	26.25	MAv1	35.6	-29.2	32.65	54	-21.35	-	-	281	339	H
7	*** 4.80982	41.9	PK2	34.1	-31.6	44.4	-	-	74	-29.6	4	391	V
	*** 4.80995	29.67	MAv1	34.1	-31.6	32.17	54	-21.83	-	-	4	391	V
8	*** 7.39574	43.24	PK2	35.6	-29.3	49.54	-	-	74	-24.46	274	198	V
	*** 7.39569	30.06	MAv1	35.6	-29.3	36.36	54	-17.64	-	-	274	198	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


PK2 - Maximum Peak

MAv1 - Maximum RMS Average

2TX Antenna 1 + Antenna 2 MODE: 242-Tones, RU index 61

BANDEDGE (LOW CHANNEL, CH 3)


HORIZONTAL RESULT

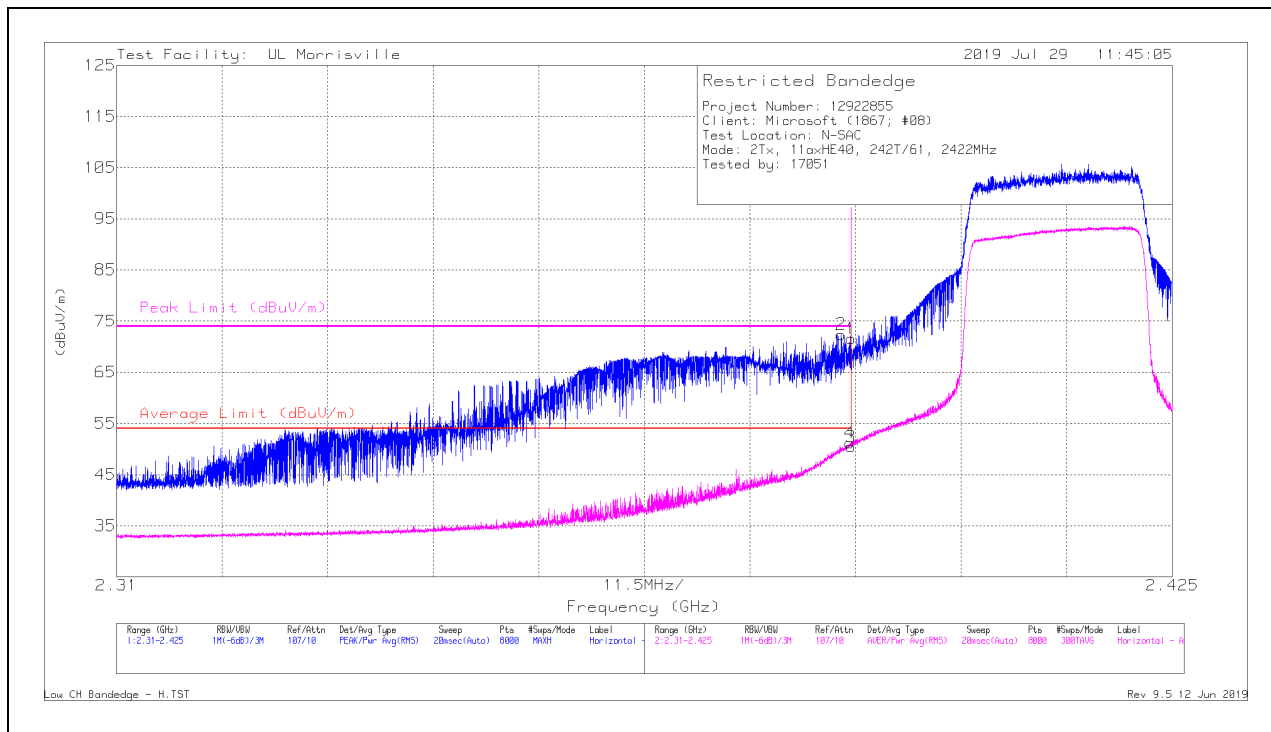

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.38999	63.98	Pk	32	-24.4	71.58	-	-	74	-2.42	21	364	H
2	* ** 2.38894	64.79	Pk	32	-24.4	72.39	-	-	74	-1.61	21	364	H
3	* ** 2.38999	42.86	RMS	32	-24.4	50.46	54	-3.54	-	-	21	364	H
4	* ** 2.38988	43.61	RMS	32	-24.4	51.21	54	-2.79	-	-	21	364	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

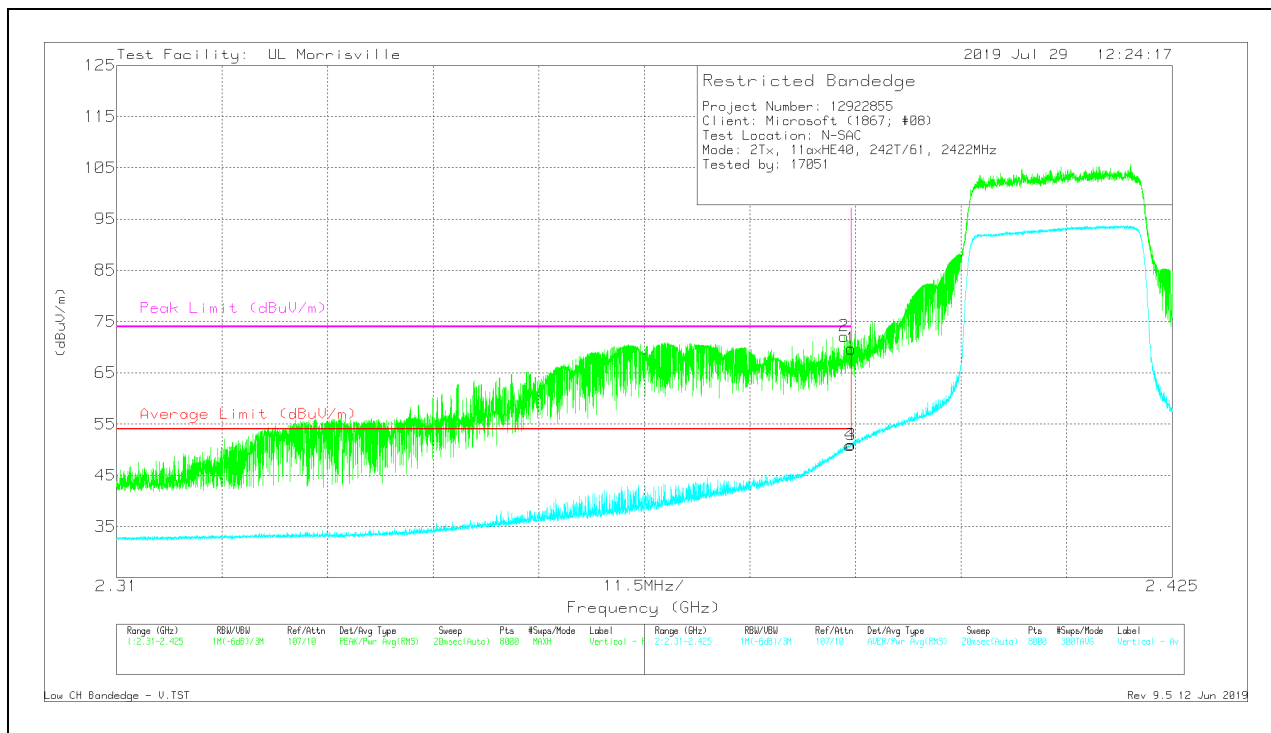

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.38999	62.11	Pk	32	-24.4	69.71	-	-	74	-4.29	131	115	V
2	* ** 2.38926	64.56	Pk	32	-24.4	72.16	-	-	74	-1.84	131	115	V
3	* ** 2.38999	43.38	RMS	32	-24.4	50.98	54	-3.02	-	-	131	115	V
4	* ** 2.38991	43.3	RMS	32	-24.4	50.9	54	-3.1	-	-	131	115	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 4)

HORIZONTAL RESULT

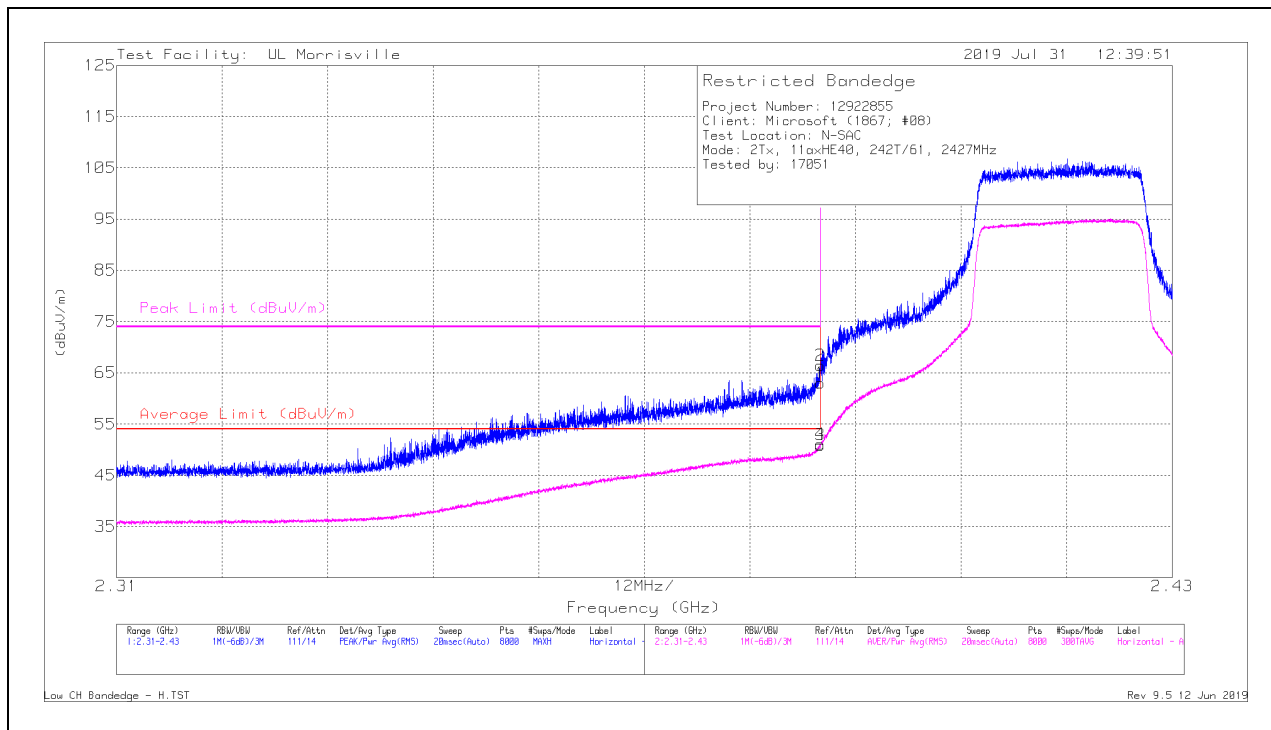

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.38999	55.39	Pk	32	-24.4	62.99	-	-	74	-11.01	19	370	H
2	* ** 2.38996	58.84	Pk	32	-24.4	66.44	-	-	74	-7.56	19	370	H
3	* ** 2.38999	43.3	RMS	32	-24.4	50.9	54	-3.1	-	-	19	370	H
4	* ** 2.38998	43.45	RMS	32	-24.4	51.05	54	-2.95	-	-	19	370	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

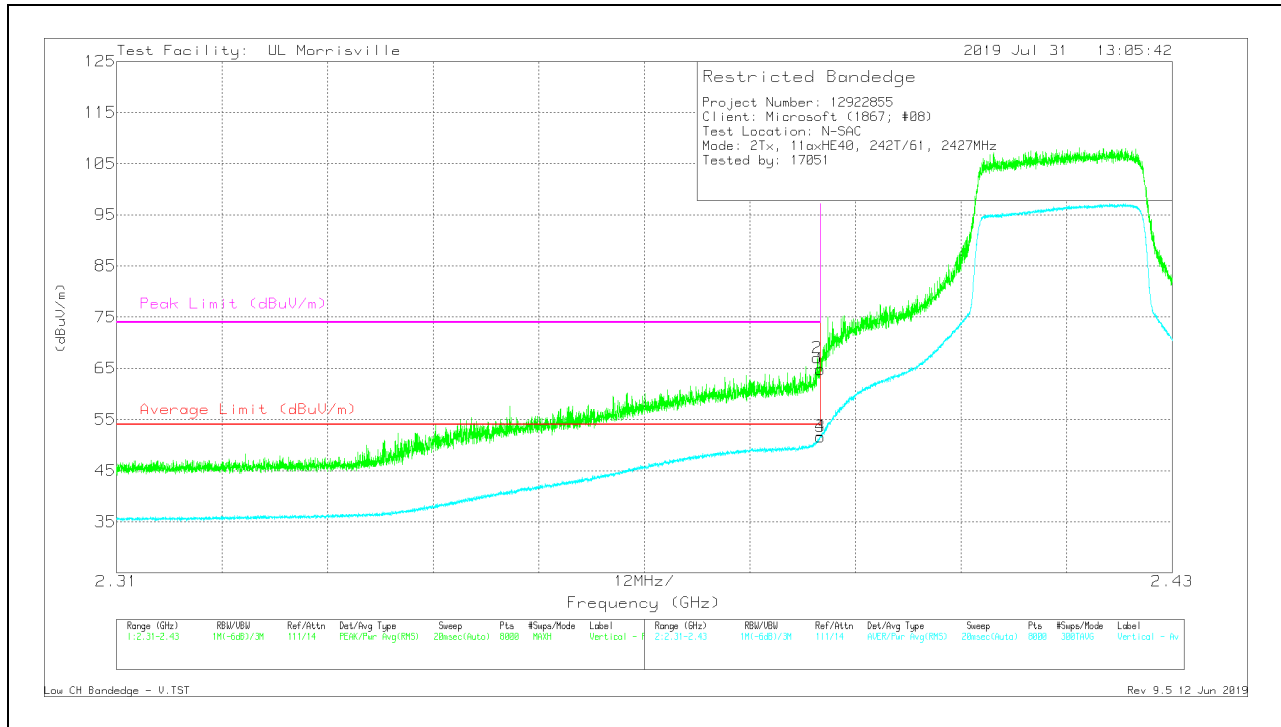

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.38999	57.19	Pk	32	-24.4	64.79	-	-	74	-9.21	113	346	V
2	* ** 2.38966	59.43	Pk	32	-24.4	67.03	-	-	74	-6.97	113	346	V
3	* ** 2.38999	44.03	RMS	32	-24.4	51.63	54	-2.37	-	-	113	346	V
4	* ** 2.38996	44.04	RMS	32	-24.4	51.64	54	-2.36	-	-	113	346	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

RMS - RMS detection

2TX Antenna 1 + Antenna 2 MODE: 242-Tones, RU index 62

BANDEDGE (HIGH CHANNEL, CH 9)


HORIZONTAL RESULT

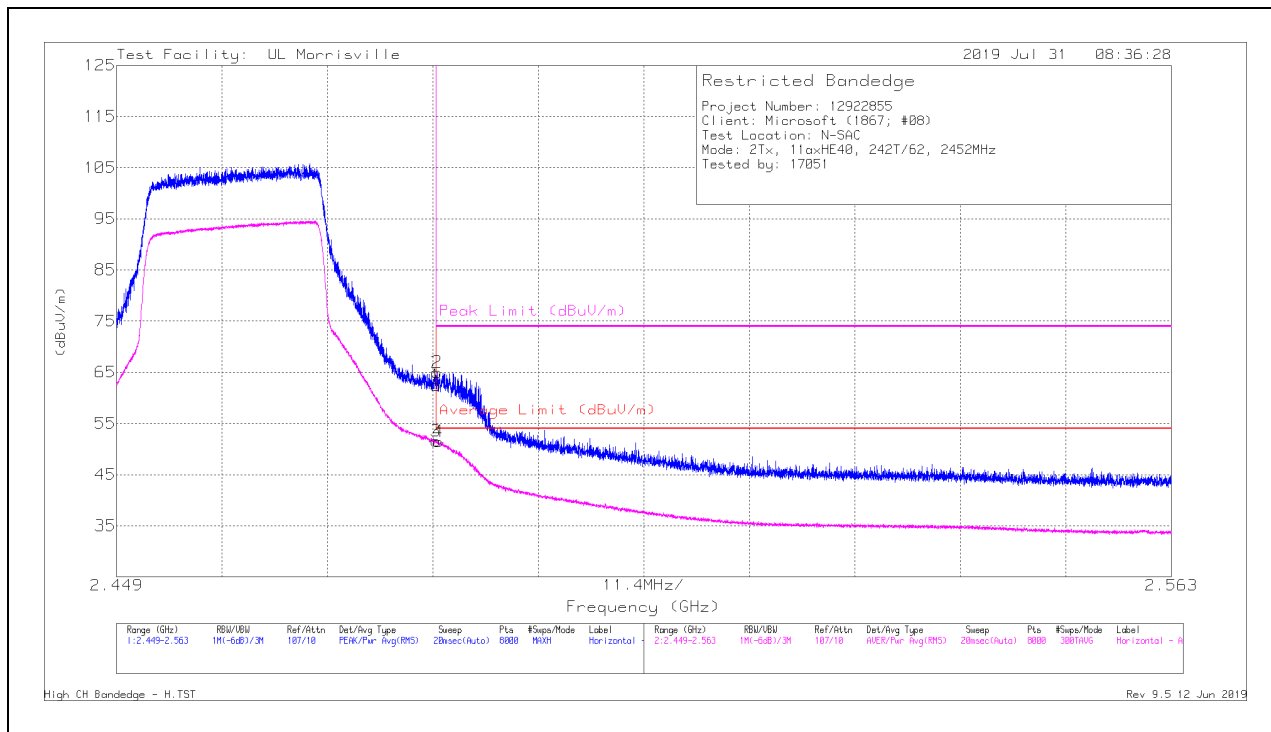

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.4835	54.36	Pk	32.4	-24.3	62.46	-	-	74	-11.54	22	379	H
3	* ** 2.4835	43.46	RMS	32.4	-24.3	51.56	54	-2.44	-	-	22	379	H
2	* ** 2.48363	56.91	Pk	32.4	-24.3	65.01	-	-	74	-8.99	22	379	H
4	* ** 2.48378	43.39	RMS	32.4	-24.3	51.49	54	-2.51	-	-	22	379	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

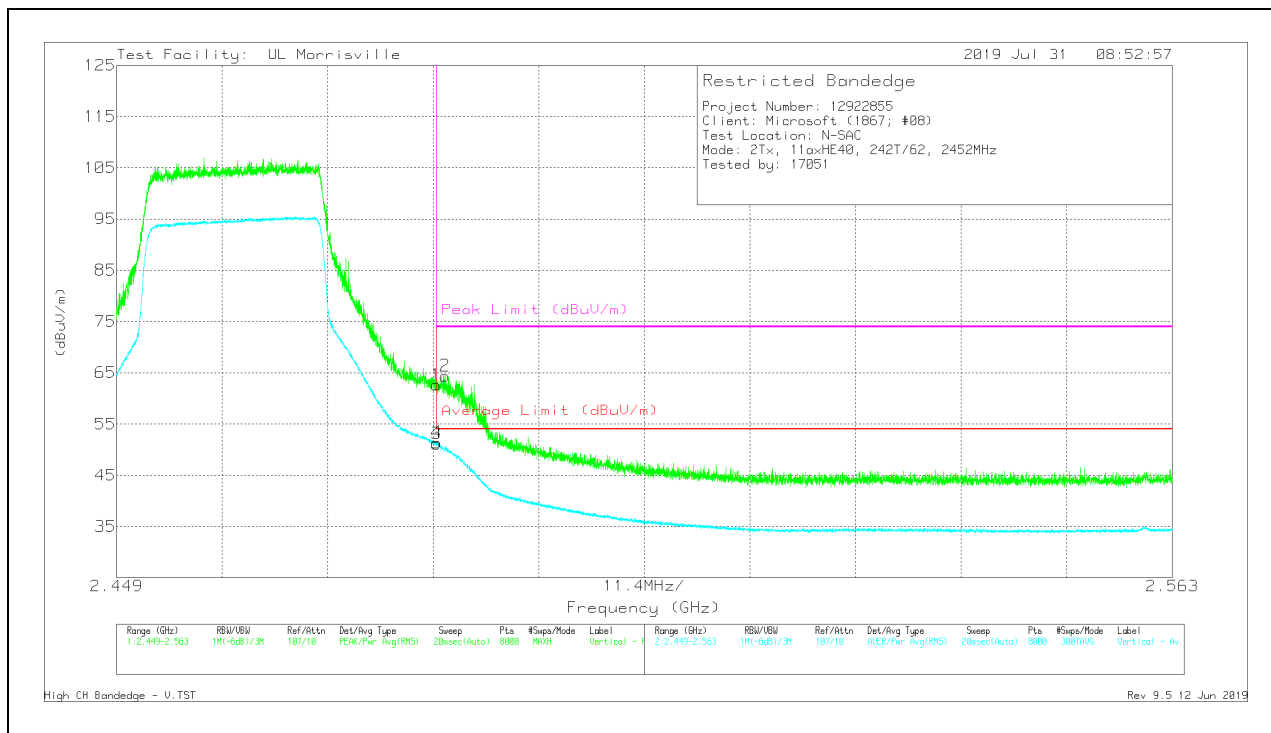

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.4835	54.51	Pk	32.4	-24.3	62.61	-	-	74	-11.39	5	391	V
2	*** 2.4845	56.3	Pk	32.4	-24.3	64.4	-	-	74	-9.6	5	391	V
3	*** 2.4835	43.06	RMS	32.4	-24.3	51.16	54	-2.84	-	-	5	391	V
4	*** 2.48356	43.26	RMS	32.4	-24.3	51.36	54	-2.64	-	-	5	391	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 10)

HORIZONTAL RESULT

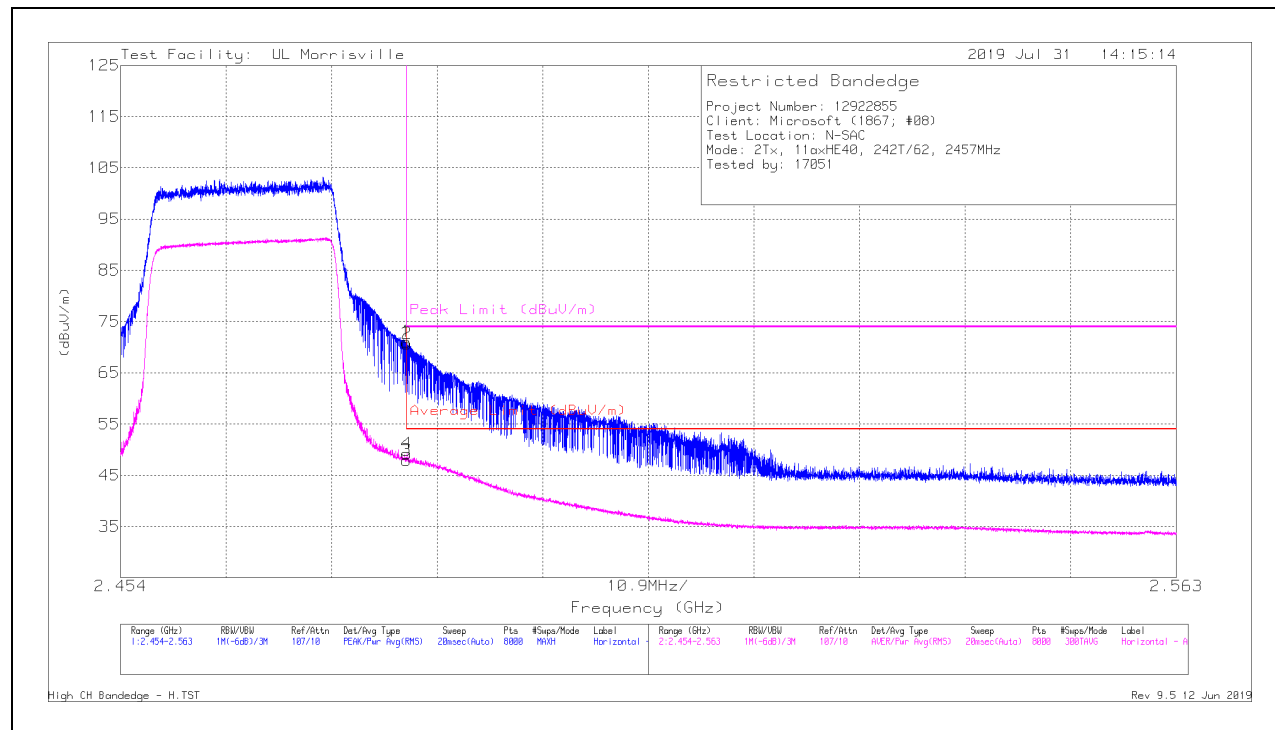

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.4835	62.96	Pk	32.4	-24.3	71.06	-	-	74	-2.94	20	379	H
2	* ** 2.48356	62.6	Pk	32.4	-24.3	70.7	-	-	74	-3.3	20	379	H
3	* ** 2.4835	39.84	RMS	32.4	-24.3	47.94	54	-6.06	-	-	20	379	H
4	* ** 2.48354	41.13	RMS	32.4	-24.3	49.23	54	-4.77	-	-	20	379	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

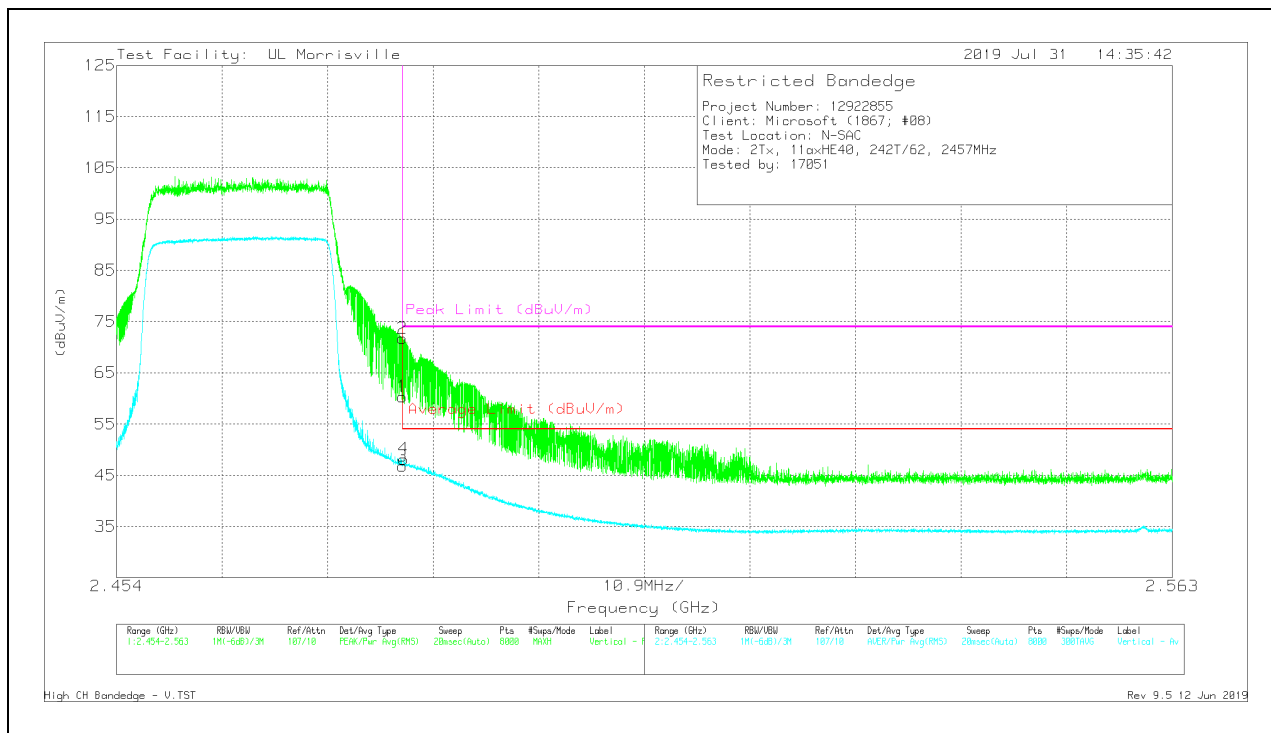

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.4835	52.24	Pk	32.4	-24.3	60.34	-	-	74	-13.66	5	391	V
2	*** 2.48353	63.64	Pk	32.4	-24.3	71.74	-	-	74	-2.26	5	391	V
3	*** 2.4835	38.68	RMS	32.4	-24.3	46.78	54	-7.22	-	-	5	391	V
4	*** 2.48364	40.08	RMS	32.4	-24.3	48.18	54	-5.82	-	-	5	391	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)

HORIZONTAL RESULT

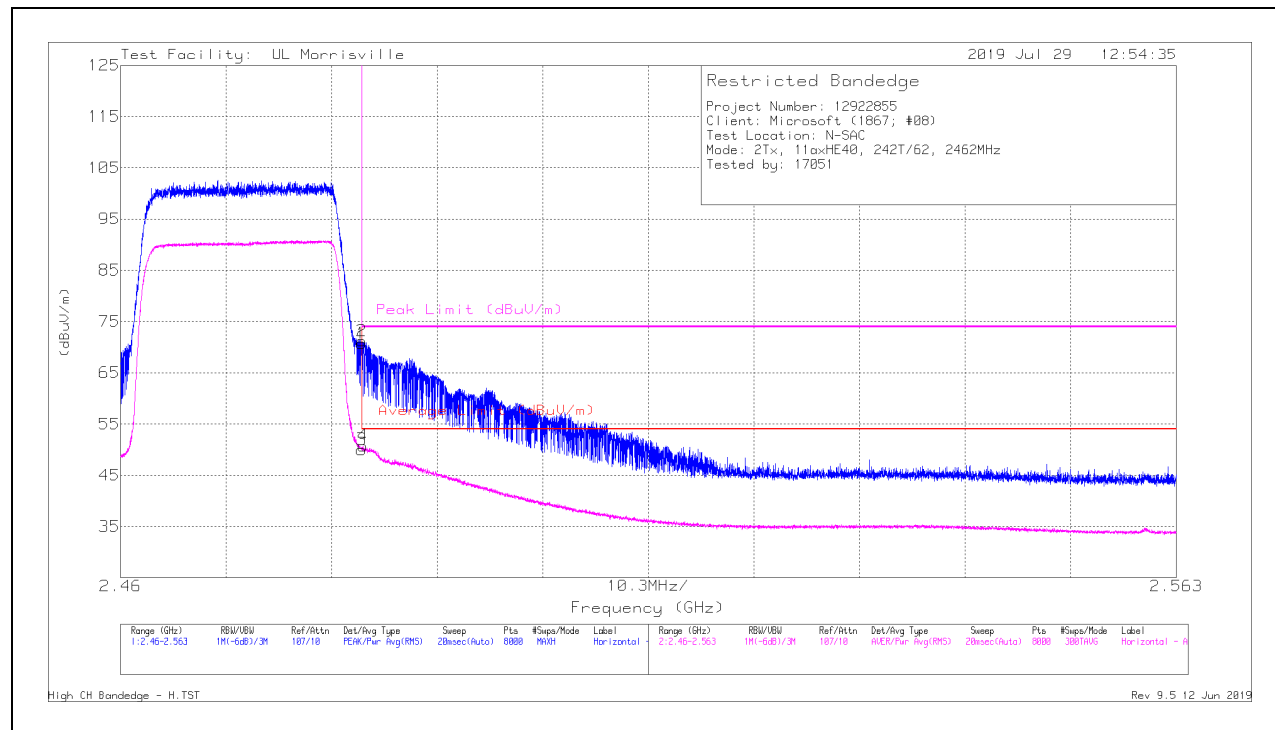

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.4835	62.64	Pk	32.4	-24.3	70.74	-	-	74	-3.26	19	379	H
2	* ** 2.48354	63.11	Pk	32.4	-24.3	71.21	-	-	74	-2.79	19	379	H
3	* ** 2.4835	41.91	RMS	32.4	-24.3	50.01	54	-3.99	-	-	19	379	H
4	* ** 2.48367	42.66	RMS	32.4	-24.3	50.76	54	-3.24	-	-	19	379	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

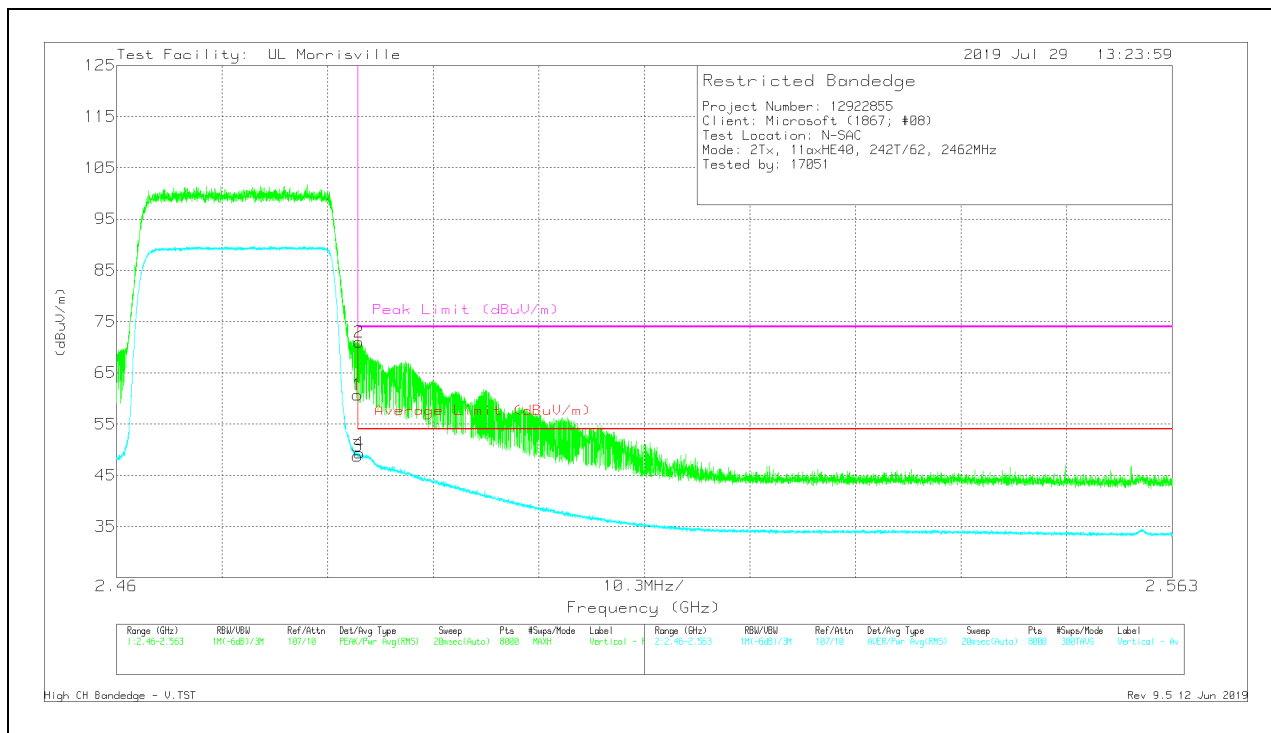

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.4835	52.55	Pk	32.4	-24.3	60.65	-	-	74	-13.35	6	383	V
2	*** 2.48363	62.9	Pk	32.4	-24.3	71	-	-	74	-3	6	383	V
3	*** 2.4835	40.65	RMS	32.4	-24.3	48.75	54	-5.25	-	-	6	383	V
4	*** 2.48368	41.25	RMS	32.4	-24.3	49.35	54	-4.65	-	-	6	383	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

RMS - RMS detection

2TX Antenna 1 + Antenna 2 MODE: 106-Tones, RU index 53

BANDEDGE (LOW CHANNEL, CH 3)

HORIZONTAL RESULT

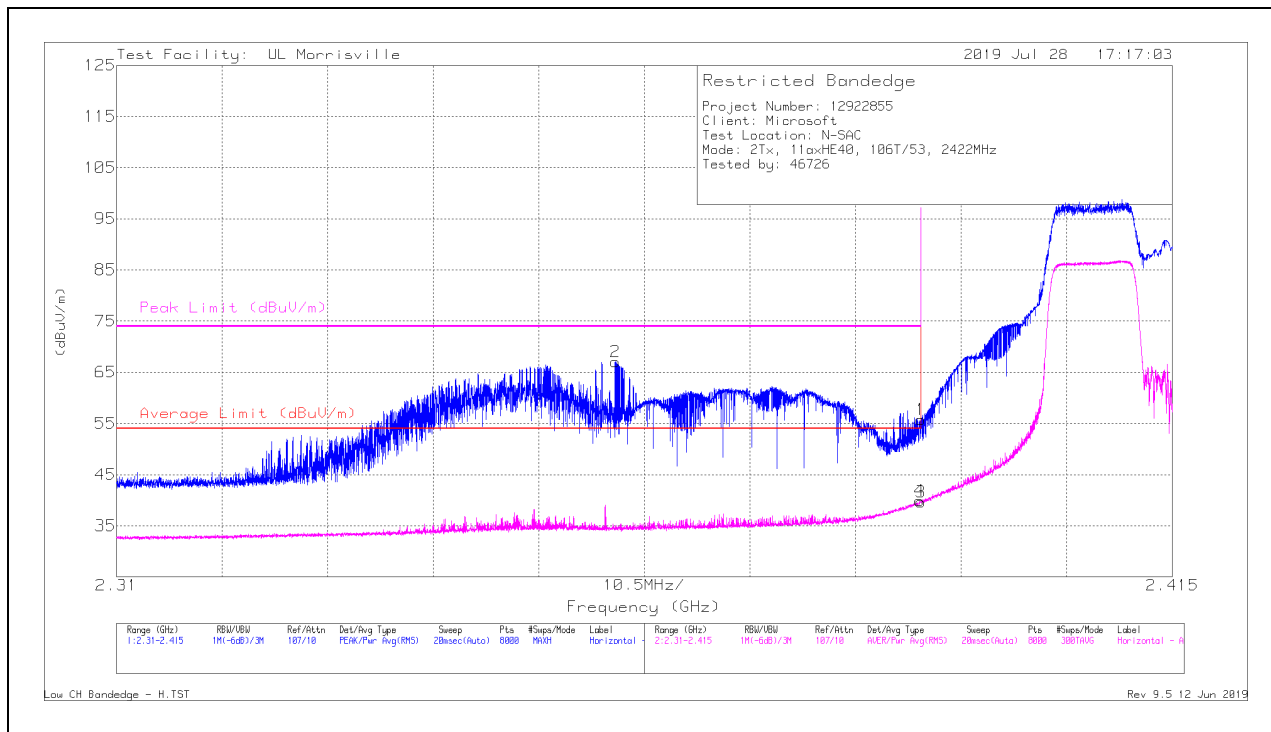

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.39	48.17	Pk	32	-24.4	55.77	-	-	74	-18.23	78	221	H
2	* ** 2.35963	59.62	Pk	31.8	-24.4	67.02	-	-	74	-6.98	78	221	H
3	* ** 2.39	32.05	RMS	32	-24.4	39.65	54	-14.35	-	-	78	221	H
4	* ** 2.38985	32.26	RMS	32	-24.4	39.86	54	-14.14	-	-	78	221	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

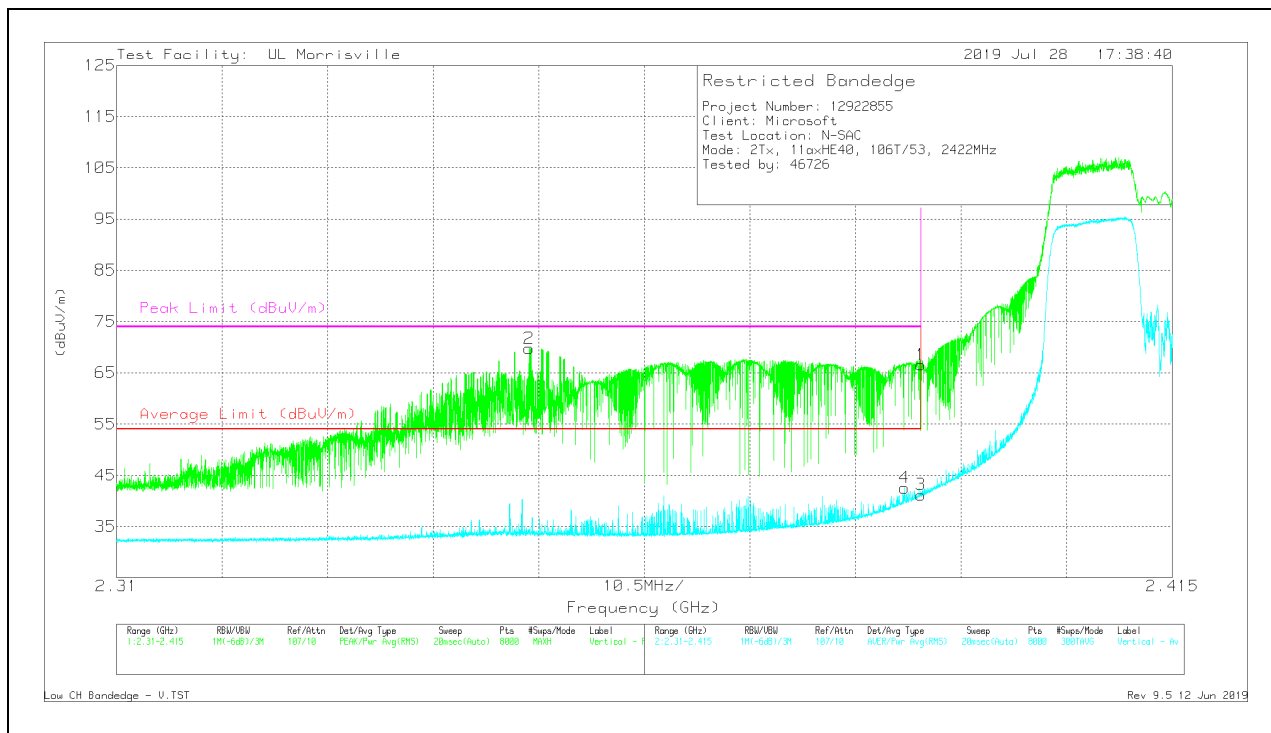

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.39	58.99	Pk	32	-24.4	66.59	-	-	74	-7.41	119	205	V
2	* ** 2.35102	62.39	Pk	31.8	-24.4	69.79	-	-	74	-4.21	119	205	V
3	* ** 2.39	33.59	RMS	32	-24.4	41.19	54	-12.81	-	-	119	205	V
4	* ** 2.38837	34.95	RMS	32	-24.4	42.55	54	-11.45	-	-	119	205	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEGE (LOW CHANNEL, CH 4)

HORIZONTAL RESULT

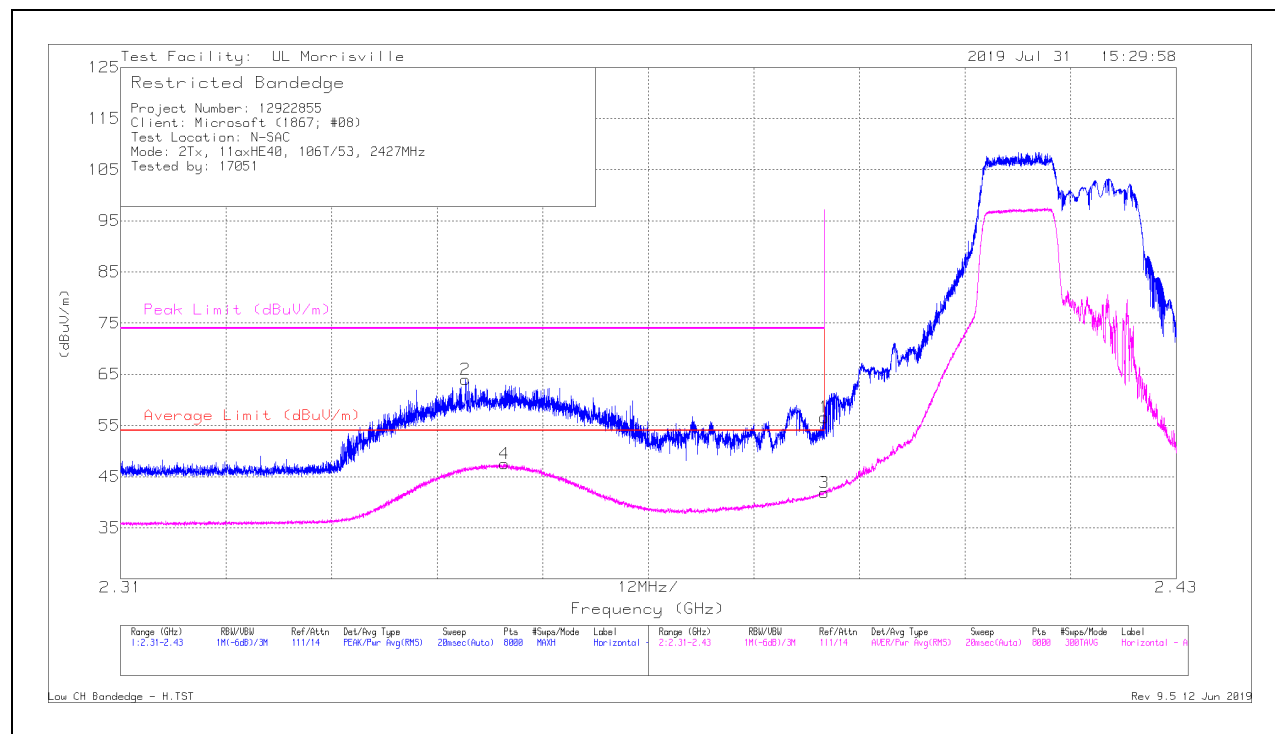

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.38999	48.96	Pk	32	-24.4	56.56	-	-	74	-17.44	15	374	H
2	* ** 2.3492	56.57	Pk	31.8	-24.4	63.97	-	-	74	-10.03	15	374	H
3	* ** 2.38999	34.29	RMS	32	-24.4	41.89	54	-12.11	-	-	15	374	H
4	* ** 2.35361	40.12	RMS	31.8	-24.4	47.52	54	-6.48	-	-	15	374	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detectio

VERTICAL RESULT

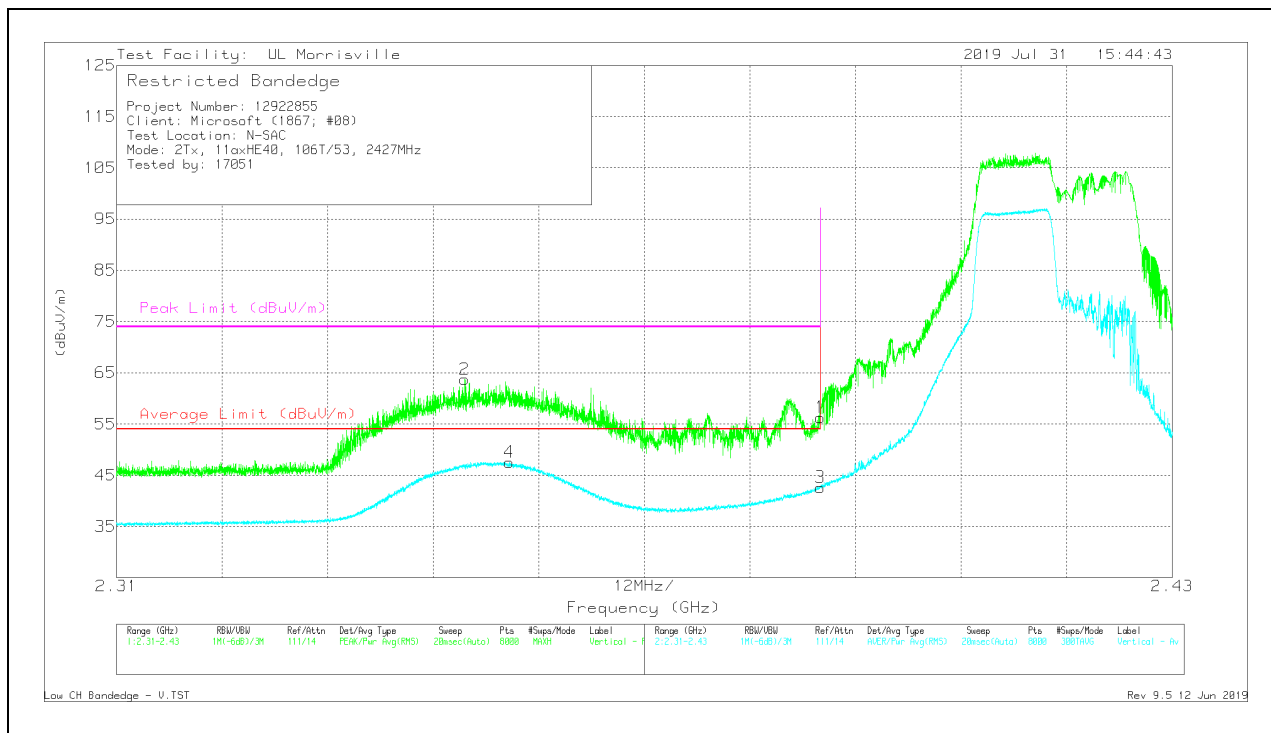

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.38999	48.68	Pk	32	-24.4	56.28	-	-	74	-17.72	112	355	V
2	* ** 2.34955	56.31	Pk	31.8	-24.4	63.71	-	-	74	-10.29	112	355	V
3	* ** 2.38999	35.04	RMS	32	-24.4	42.64	54	-11.36	-	-	112	355	V
4	* ** 2.3546	40.15	RMS	31.8	-24.4	47.55	54	-6.45	-	-	112	355	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

RMS - RMS detection

2TX Antenna 1 + Antenna 2 MODE: 106-Tones, RU index 56

BANDEDGE (HIGH CHANNEL, CH 9)


HORIZONTAL RESULT

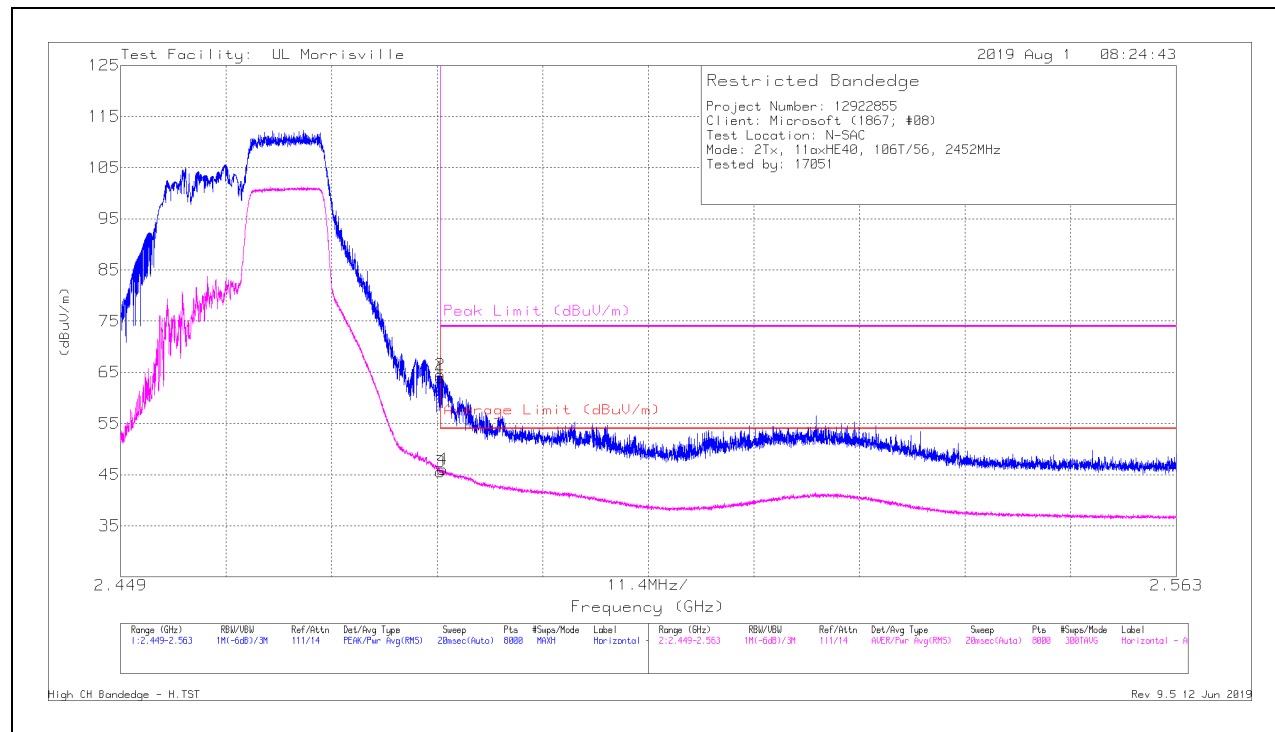

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.4835	55.89	Pk	32.4	-24.3	63.99	-	-	74	-10.01	5	376	H
2	* ** 2.48355	56.37	Pk	32.4	-24.3	64.47	-	-	74	-9.53	5	376	H
3	* ** 2.4835	37.41	RMS	32.4	-24.3	45.51	54	-8.49	-	-	5	376	H
4	* ** 2.4838	37.96	RMS	32.4	-24.3	46.06	54	-7.94	-	-	5	376	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

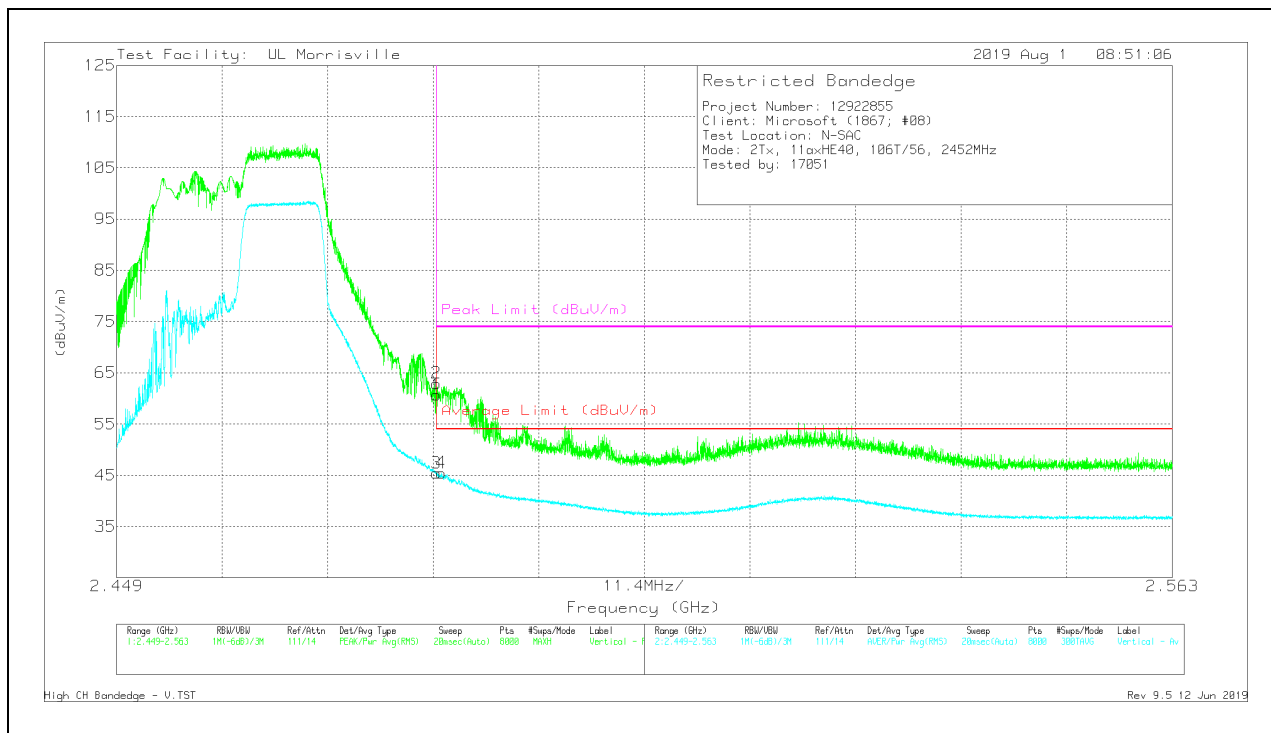

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.4835	52.58	Pk	32.4	-24.3	60.68	-	-	74	-13.32	262	281	V
2	*** 2.48353	54.84	Pk	32.4	-24.3	62.94	-	-	74	-11.06	262	281	V
3	*** 2.4835	37.31	RMS	32.4	-24.3	45.41	54	-8.59	-	-	262	281	V
4	*** 2.48407	37.36	RMS	32.4	-24.3	45.46	54	-8.54	-	-	262	281	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 10)

HORIZONTAL RESULT

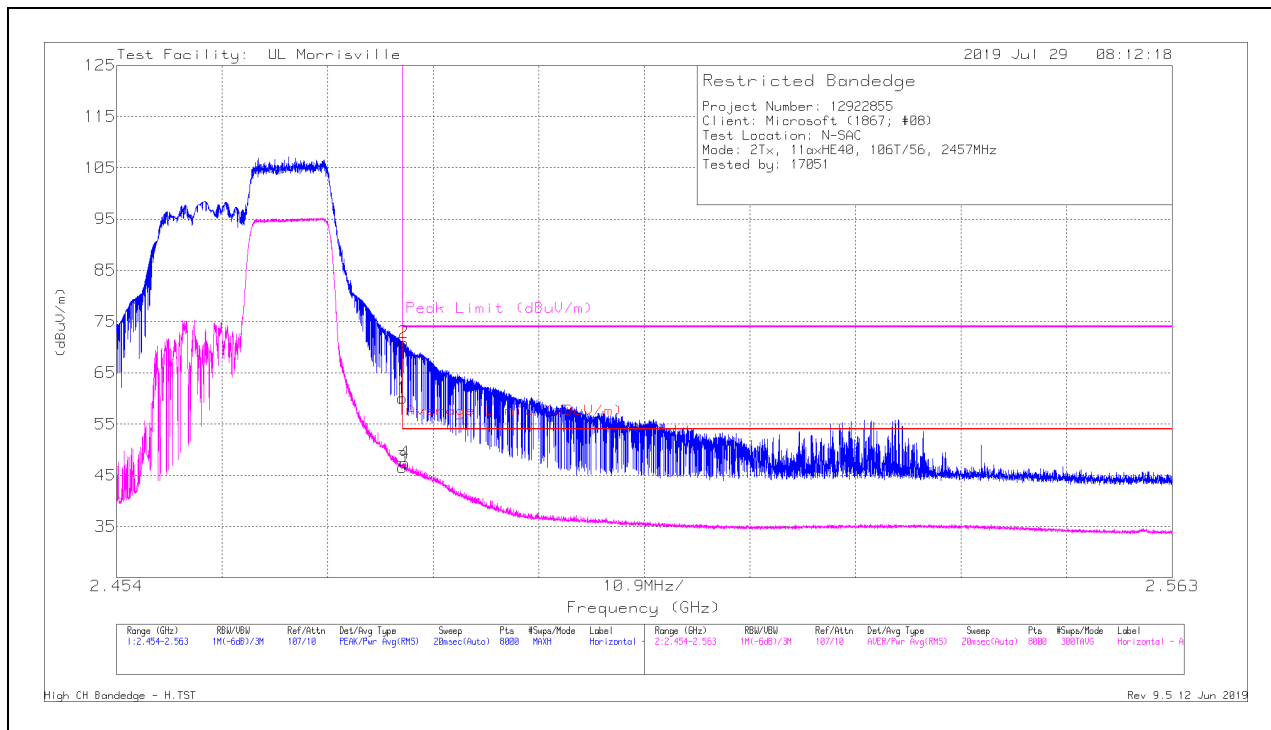

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.4835	51.95	Pk	32.4	-24.3	60.05	-	-	74	-13.95	22	378	H
2	* ** 2.48363	62.81	Pk	32.4	-24.3	70.91	-	-	74	-3.09	22	378	H
3	* ** 2.4835	38.5	RMS	32.4	-24.3	46.6	54	-7.4	-	-	22	378	H
4	* ** 2.48379	39.33	RMS	32.4	-24.3	47.43	54	-6.57	-	-	22	378	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

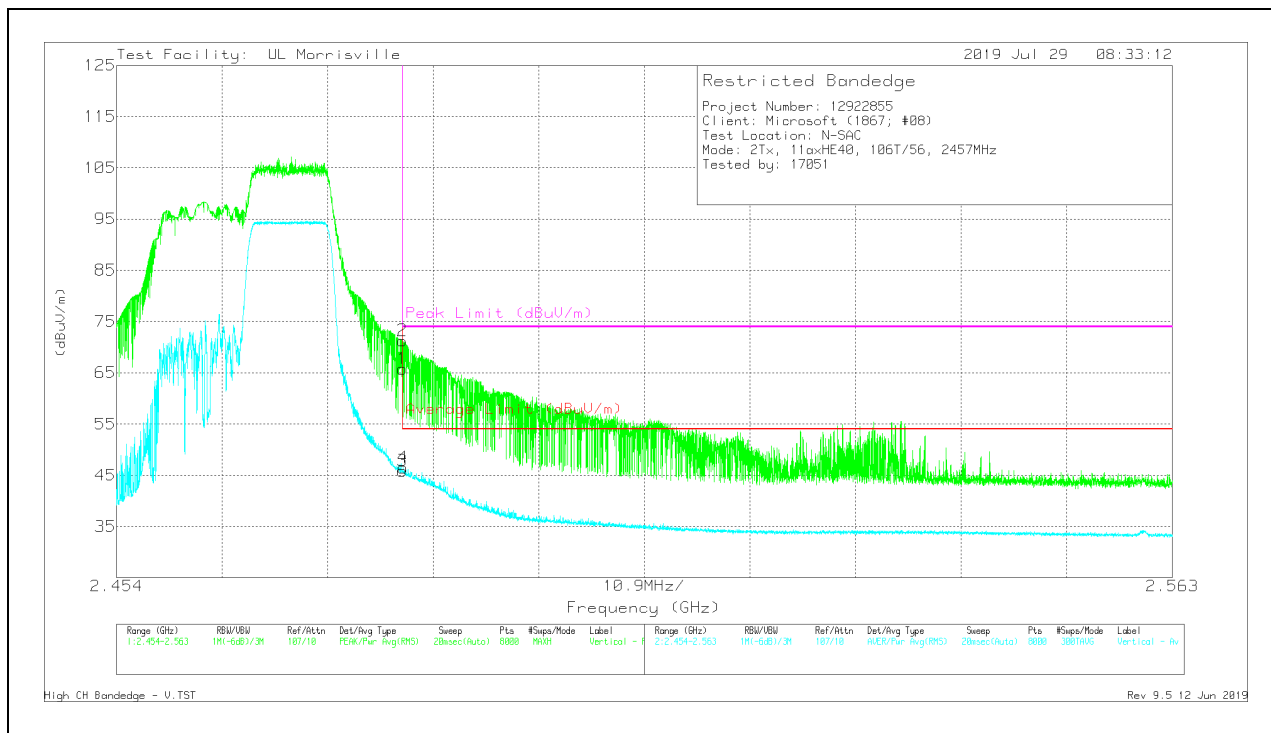

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.4835	57.68	Pk	32.4	-24.3	65.78	-	-	74	-8.22	10	383	V
2	*** 2.48352	63.18	Pk	32.4	-24.3	71.28	-	-	74	-2.72	10	383	V
3	*** 2.4835	37.77	RMS	32.4	-24.3	45.87	54	-8.13	-	-	10	383	V
4	*** 2.48358	38.38	RMS	32.4	-24.3	46.48	54	-7.52	-	-	10	383	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)

HORIZONTAL RESULT

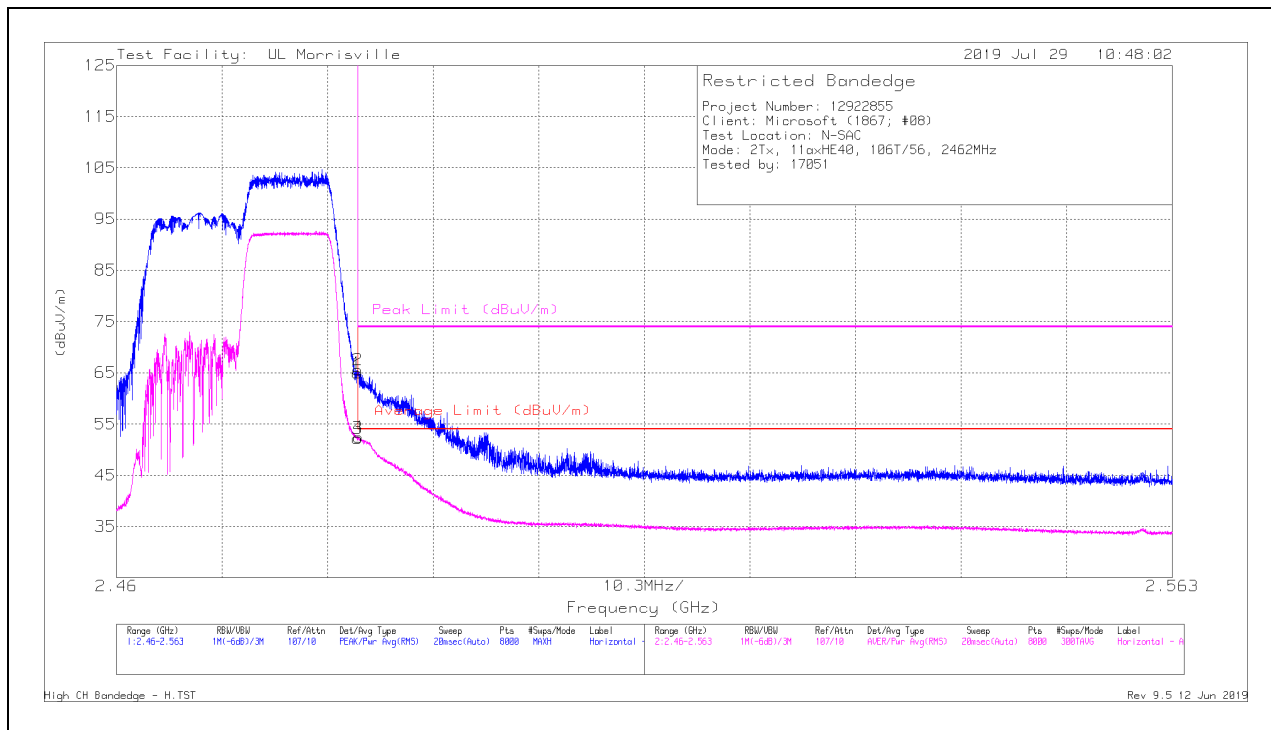

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.4835	56.88	Pk	32.4	-24.3	64.98	-	-	74	-9.02	18	379	H
2	* ** 2.48354	57.45	Pk	32.4	-24.3	65.55	-	-	74	-8.45	18	379	H
3	* ** 2.4835	44.14	RMS	32.4	-24.3	52.24	54	-1.76	-	-	18	379	H
4	* ** 2.48362	44.35	RMS	32.4	-24.3	52.45	54	-1.55	-	-	18	379	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

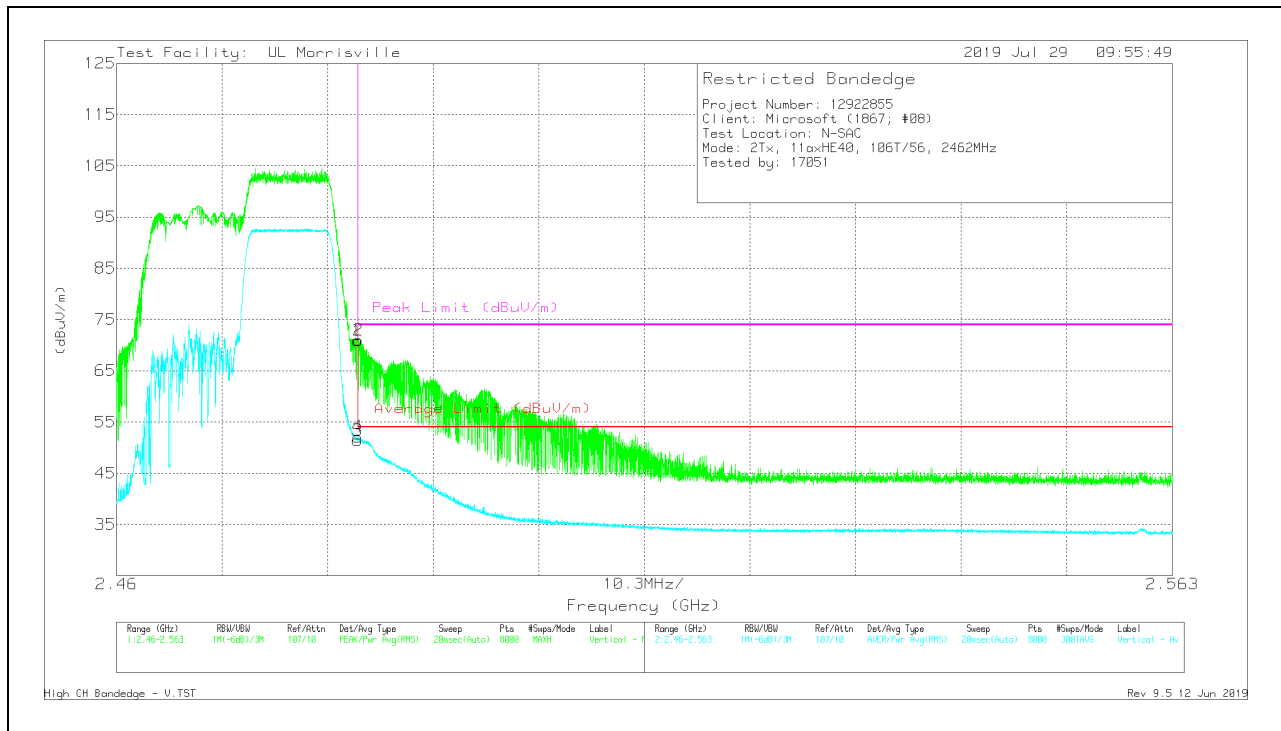

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.4835	62.8	Pk	32.4	-24.3	70.9	-	-	74	-3.1	8	383	V
2	*** 2.48359	62.88	Pk	32.4	-24.3	70.98	-	-	74	-3.02	8	383	V
3	*** 2.4835	43.35	RMS	32.4	-24.3	51.45	54	-2.55	-	-	8	383	V
4	*** 2.48355	44.01	RMS	32.4	-24.3	52.11	54	-1.89	-	-	8	383	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

RMS - RMS detection

2TX Antenna 1 + Antenna 2 MODE: 52-Tones, RU index 37

BANDEDGE (LOW CHANNEL, CH 3)

HORIZONTAL RESULT

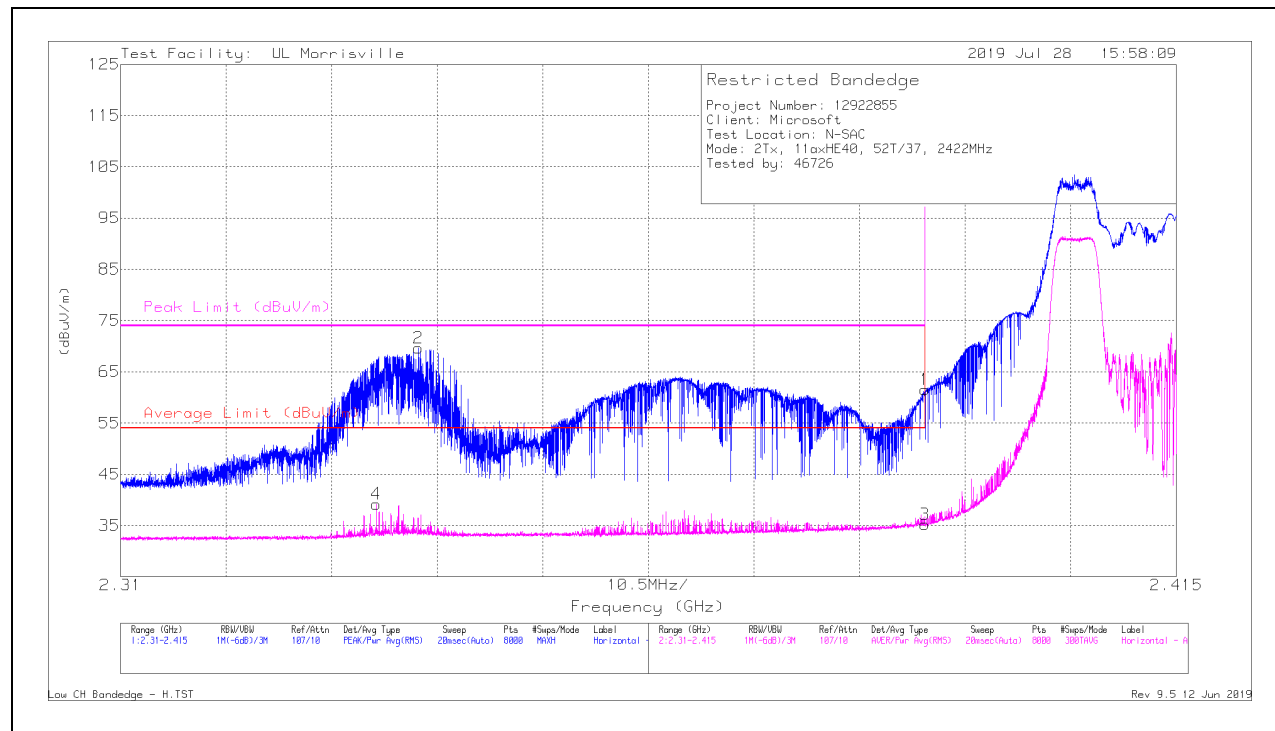

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.39	53.94	Pk	32	-24.4	61.54	-	-	74	-12.46	218	175	H
2	* ** 2.33963	62.33	Pk	31.7	-24.4	69.63	-	-	74	-4.37	218	175	H
3	* ** 2.39	27.62	RMS	32	-24.4	35.22	54	-18.78	-	-	218	175	H
4	* ** 2.33544	31.89	RMS	31.7	-24.4	39.19	54	-14.81	-	-	218	175	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

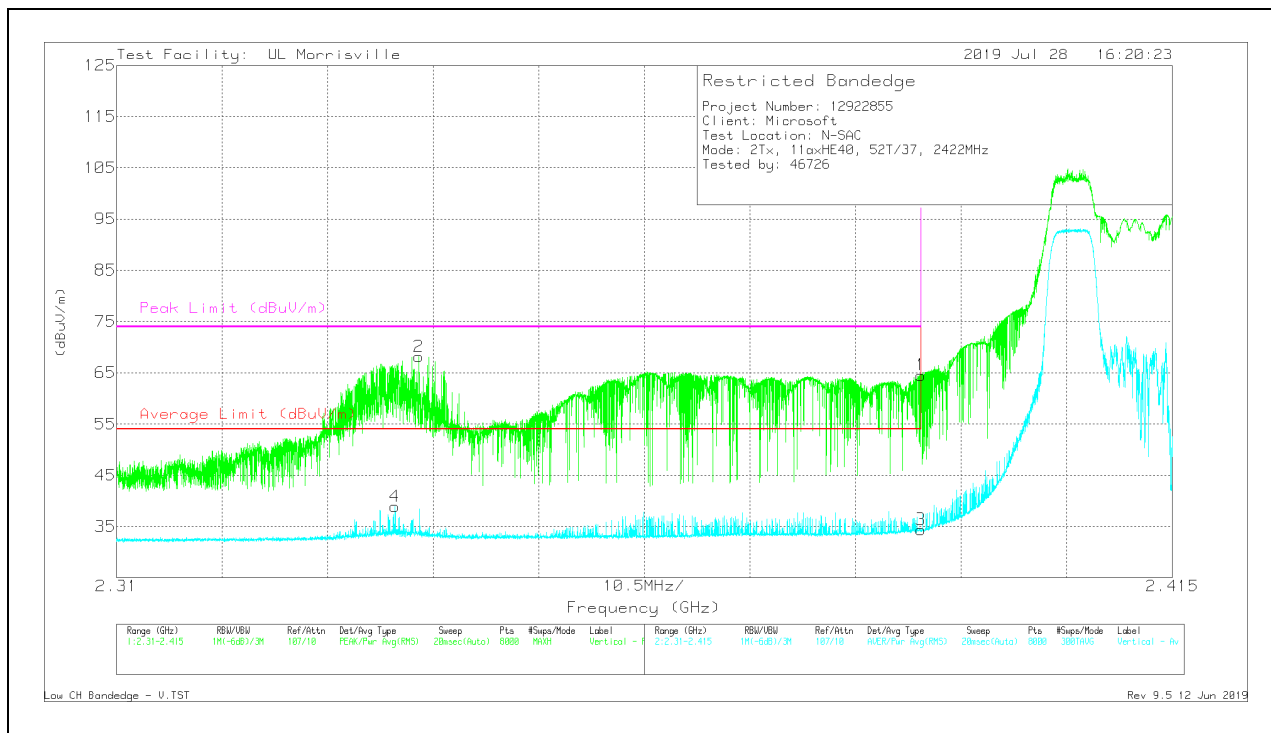

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.39	56.94	Pk	32	-24.4	64.54	-	-	74	-9.46	117	99	V
2	* ** 2.34007	60.77	Pk	31.8	-24.4	68.17	-	-	74	-5.83	117	99	V
3	* ** 2.39	26.8	RMS	32	-24.4	34.4	54	-19.6	-	-	117	99	V
4	* ** 2.33766	31.63	RMS	31.7	-24.4	38.93	54	-15.07	-	-	117	99	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 4)

HORIZONTAL RESULT

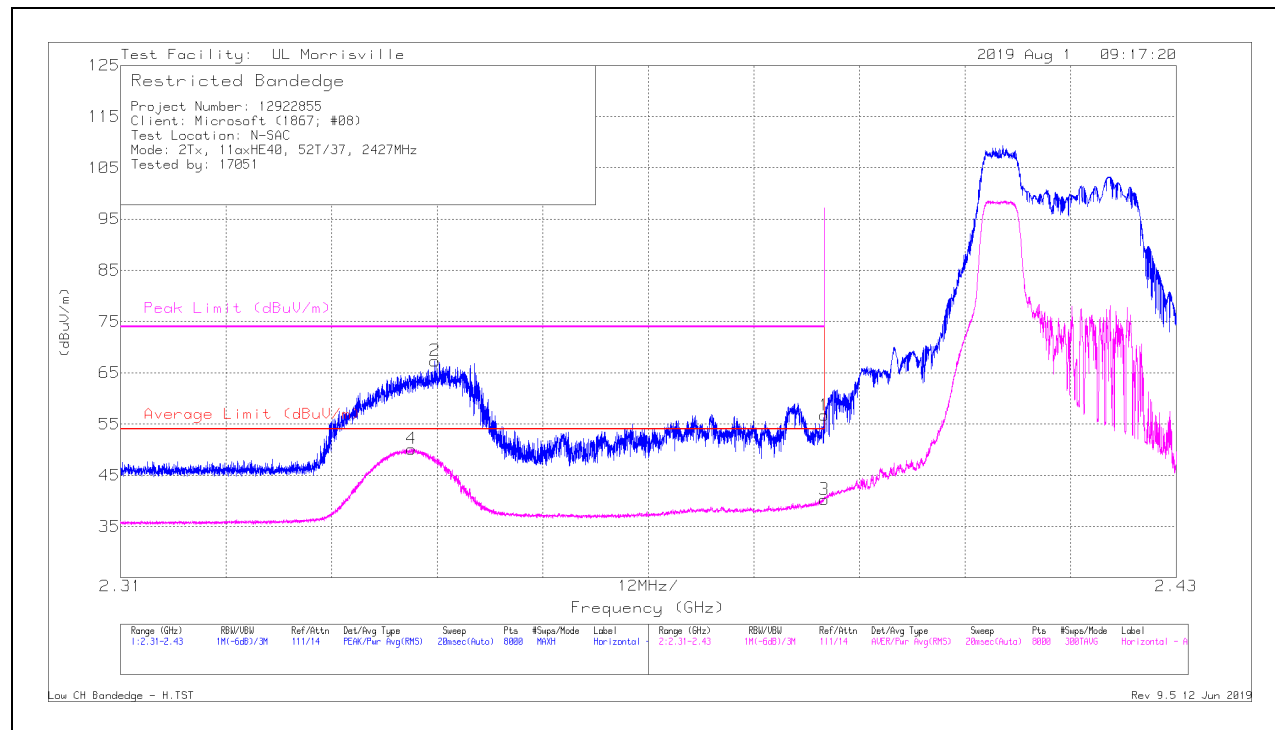

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.38999	49.13	Pk	32	-24.4	56.73	-	-	74	-17.27	8	380	H
2	* ** 2.34574	59.97	Pk	31.8	-24.4	67.37	-	-	74	-6.63	8	380	H
3	* ** 2.38999	32.7	RMS	32	-24.4	40.3	54	-13.7	-	-	8	380	H
4	* ** 2.34308	42.76	RMS	31.8	-24.4	50.16	54	-3.84	-	-	8	380	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

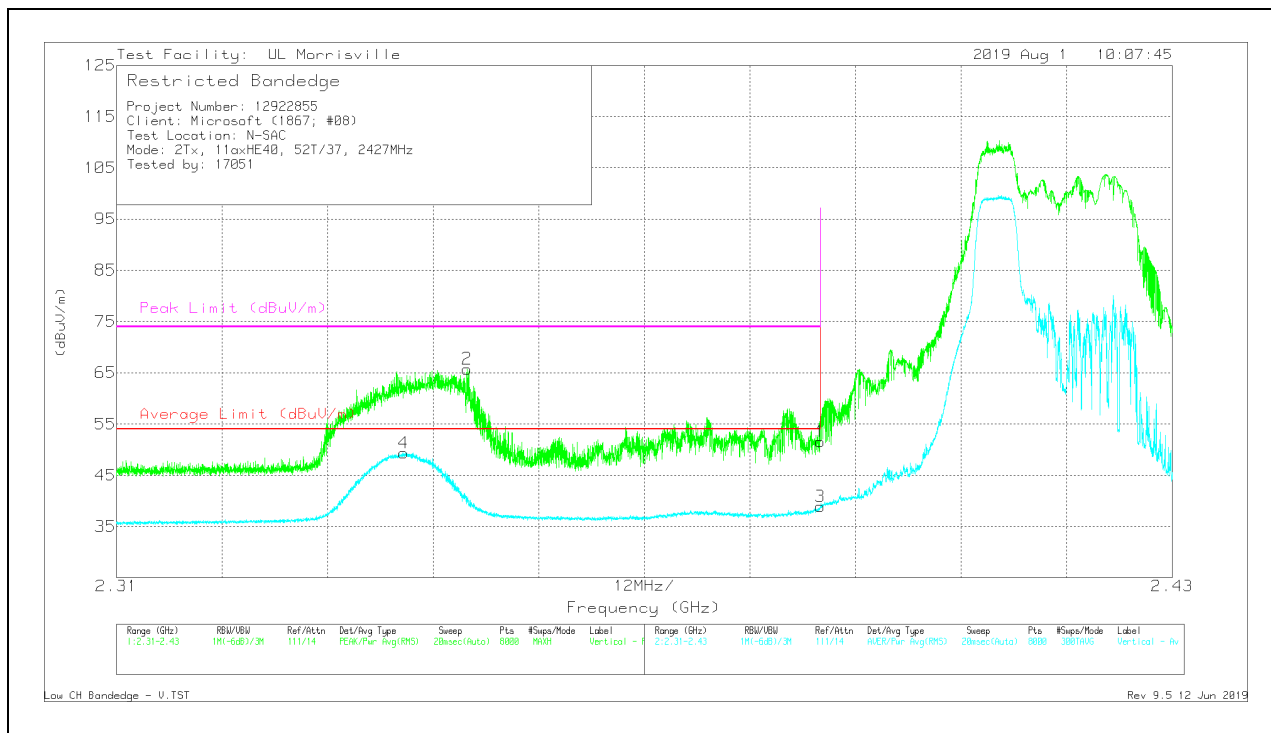

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.38999	43.95	Pk	32	-24.4	51.55	-	-	74	-22.45	0	381	V
2	* ** 2.34982	58.36	Pk	31.8	-24.4	65.76	-	-	74	-8.24	0	381	V
3	* ** 2.38999	31.31	RMS	32	-24.4	38.91	54	-15.09	-	-	0	381	V
4	* ** 2.34266	41.99	RMS	31.8	-24.4	49.39	54	-4.61	-	-	0	381	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

RMS - RMS detection

2TX Antenna 1 + Antenna 2 MODE: 52-Tones, RU index 44

BANDEDGE (HIGH CHANNEL, CH 9)

HORIZONTAL RESULT

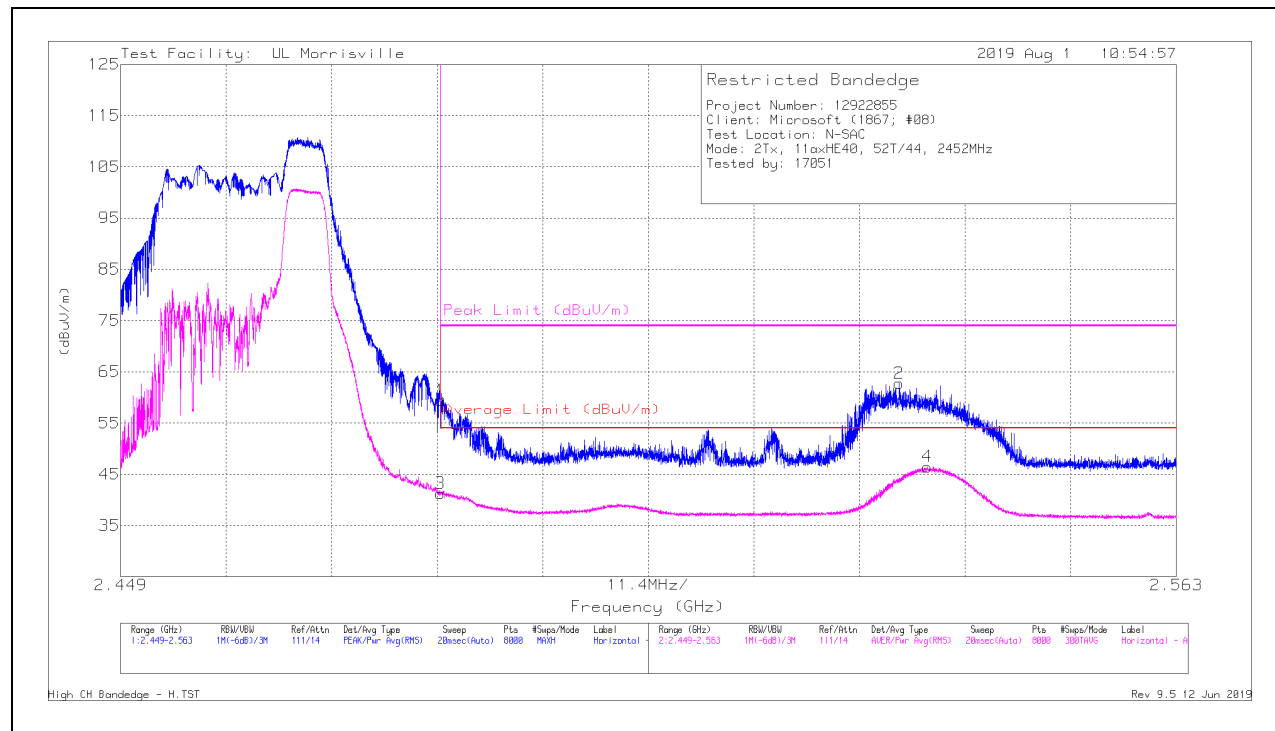

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.4835	51.35	Pk	32.4	-24.3	59.45	-	-	74	-14.55	19	401	H
2	** 2.53309	54.55	Pk	32.5	-24.3	62.75	-	-	74	-11.25	19	401	H
3	*** 2.4835	33.18	RMS	32.4	-24.3	41.28	54	-12.72	-	-	19	401	H
4	** 2.53609	38.27	RMS	32.5	-24.3	46.47	54	-7.53	-	-	19	401	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

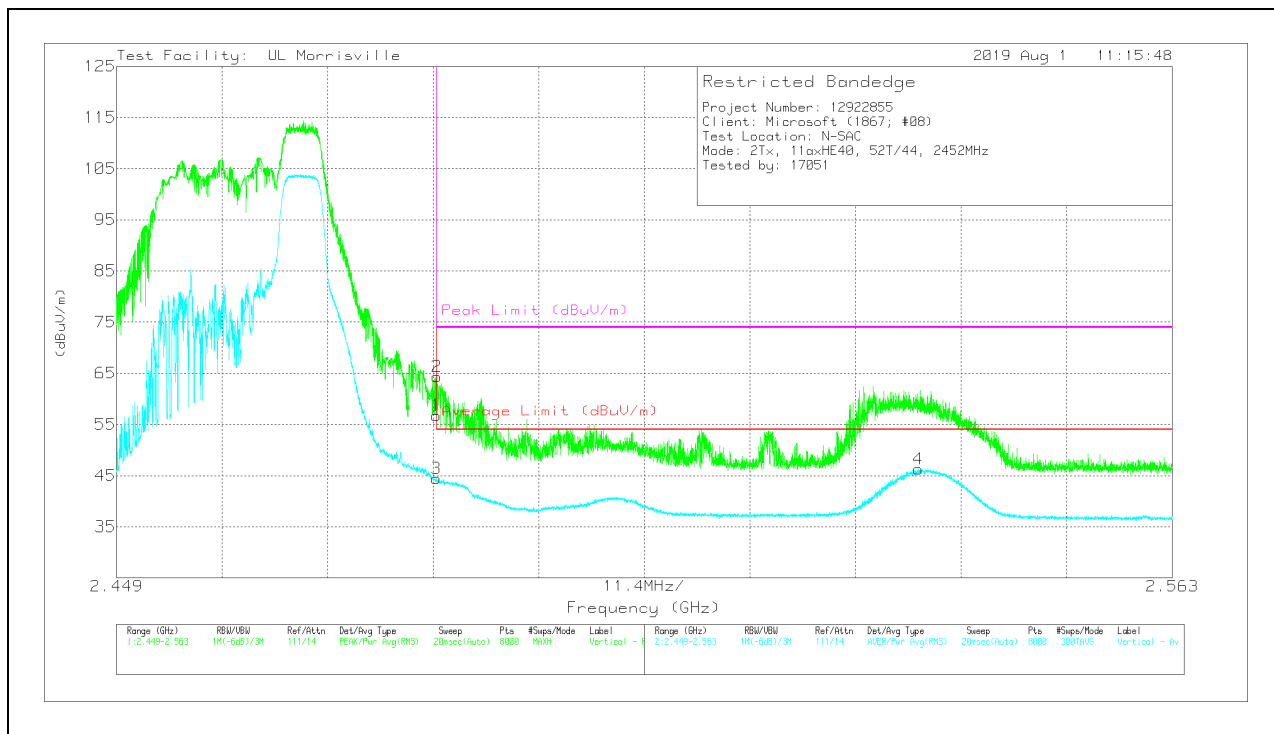

Marker	Freq. (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/ Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.4835	48.68	Pk	32.4	-24.3	56.78	-	-	74	-17.22	130	217	V
2	* ** 2.4836	56.24	Pk	32.4	-24.3	64.34	-	-	74	-9.66	130	217	V
3	* ** 2.4835	36.32	RMS	32.4	-24.3	44.42	54	-9.58	-	-	130	217	V
4	** 2.53558	38.05	RMS	32.5	-24.3	46.25	54	-7.75	-	-	130	217	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 10)

HORIZONTAL RESULT

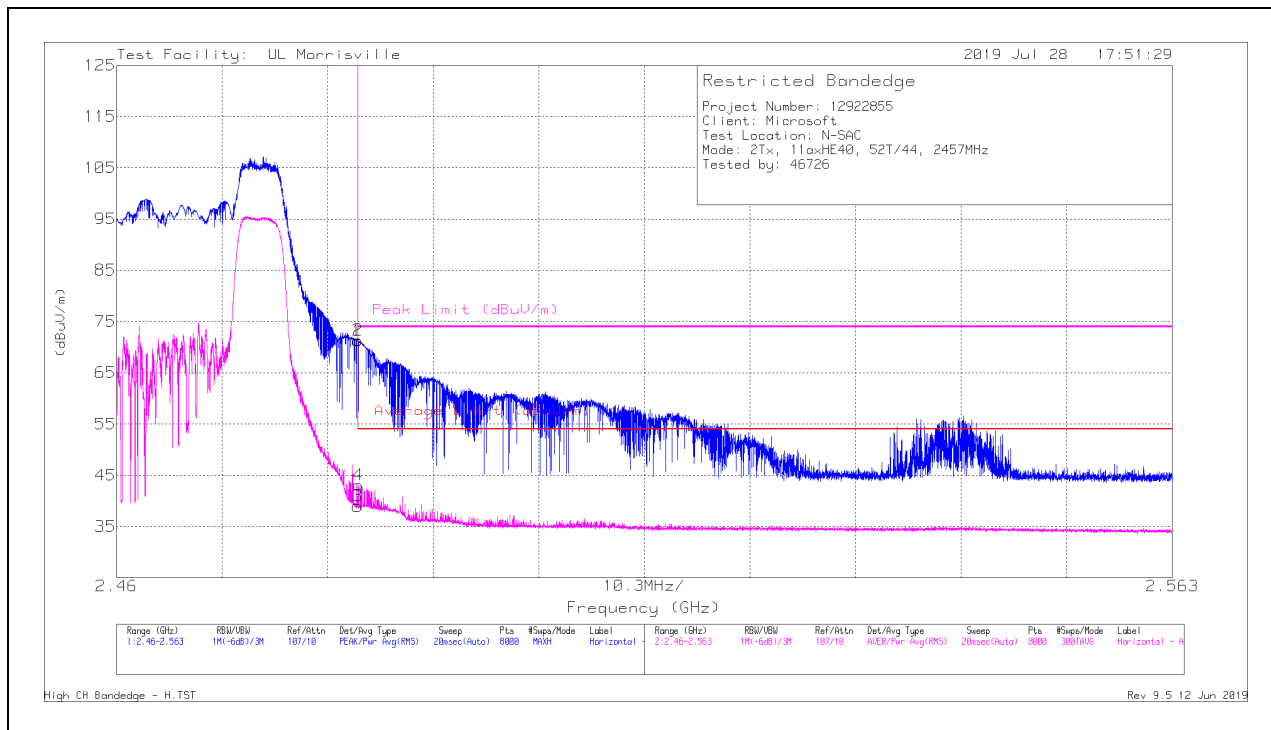

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.4835	63.11	Pk	32.4	-24.3	71.21	-	-	74	-2.79	201	265	H
2	*** 2.48355	63.23	Pk	32.4	-24.3	71.33	-	-	74	-2.67	201	265	H
3	*** 2.4835	30.89	RMS	32.4	-24.3	38.99	54	-15.01	-	-	201	265	H
4	*** 2.48359	34.98	RMS	32.4	-24.3	43.08	54	-10.92	-	-	201	265	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

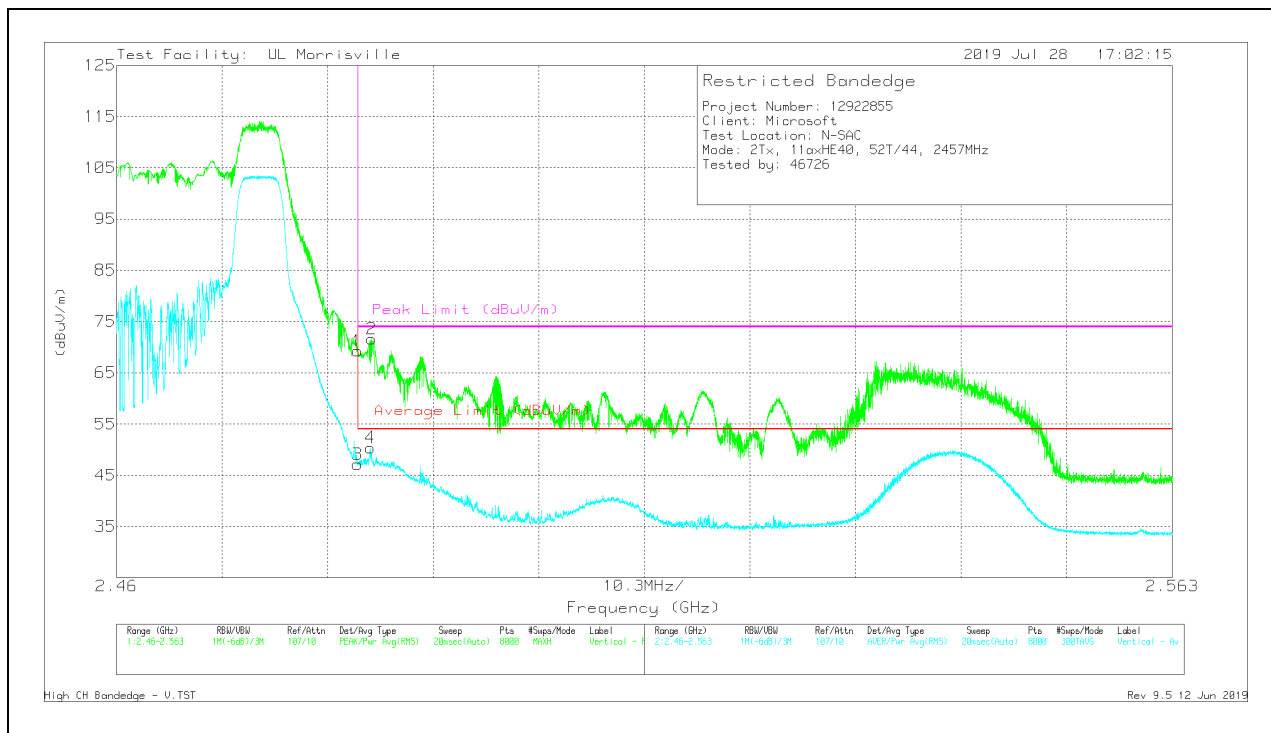

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/ Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.4835	61.17	Pk	32.4	-24.3	69.27	-	-	74	-4.73	350	123	V
2	*** 2.48487	63.47	Pk	32.4	-24.3	71.57	-	-	74	-2.43	350	123	V
3	*** 2.4835	39.07	RMS	32.4	-24.3	47.17	54	-6.83	-	-	350	123	V
4	*** 2.48474	42.28	RMS	32.4	-24.3	50.38	54	-3.62	-	-	350	123	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)

HORIZONTAL RESULT

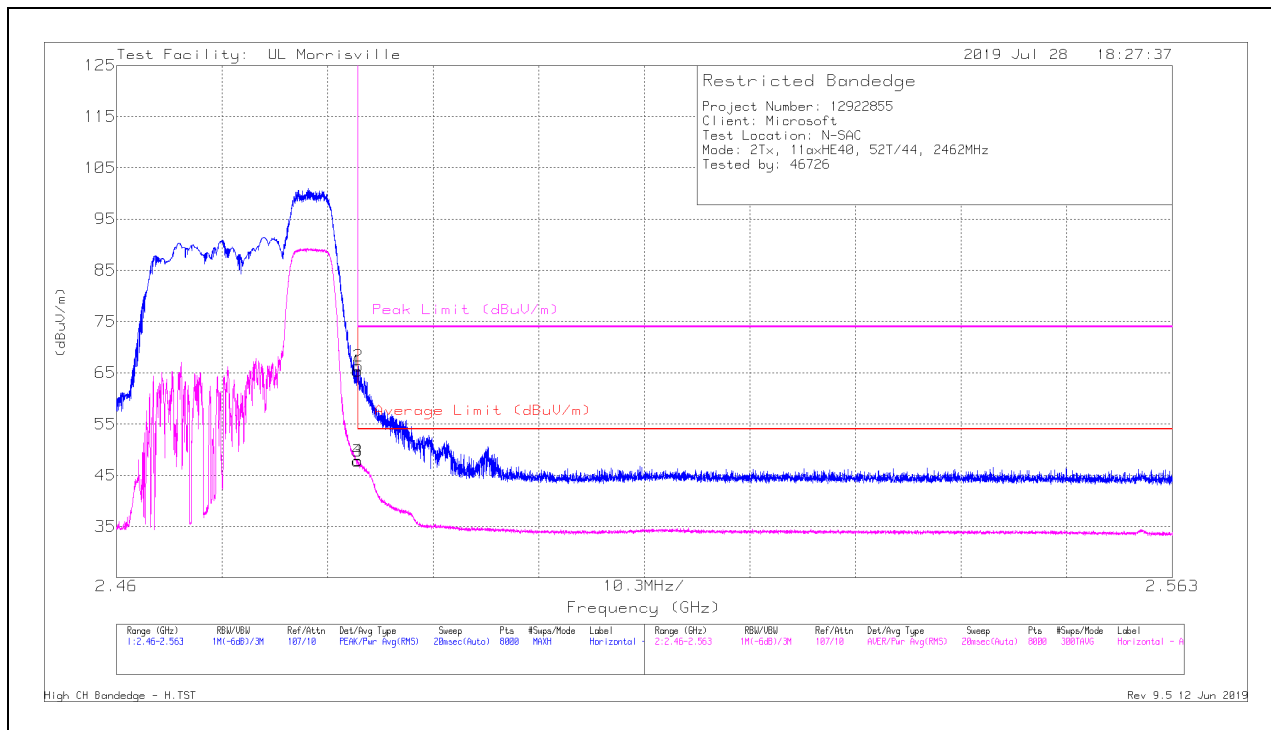

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/ Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.4835	57.24	Pk	32.4	-24.3	65.34	-	-	74	-8.66	352	318	H
2	* ** 2.4836	58.18	Pk	32.4	-24.3	66.28	-	-	74	-7.72	352	318	H
3	* ** 2.4835	39.64	RMS	32.4	-24.3	47.74	54	-6.26	-	-	352	318	H
4	* ** 2.48353	39.77	RMS	32.4	-24.3	47.87	54	-6.13	-	-	352	318	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

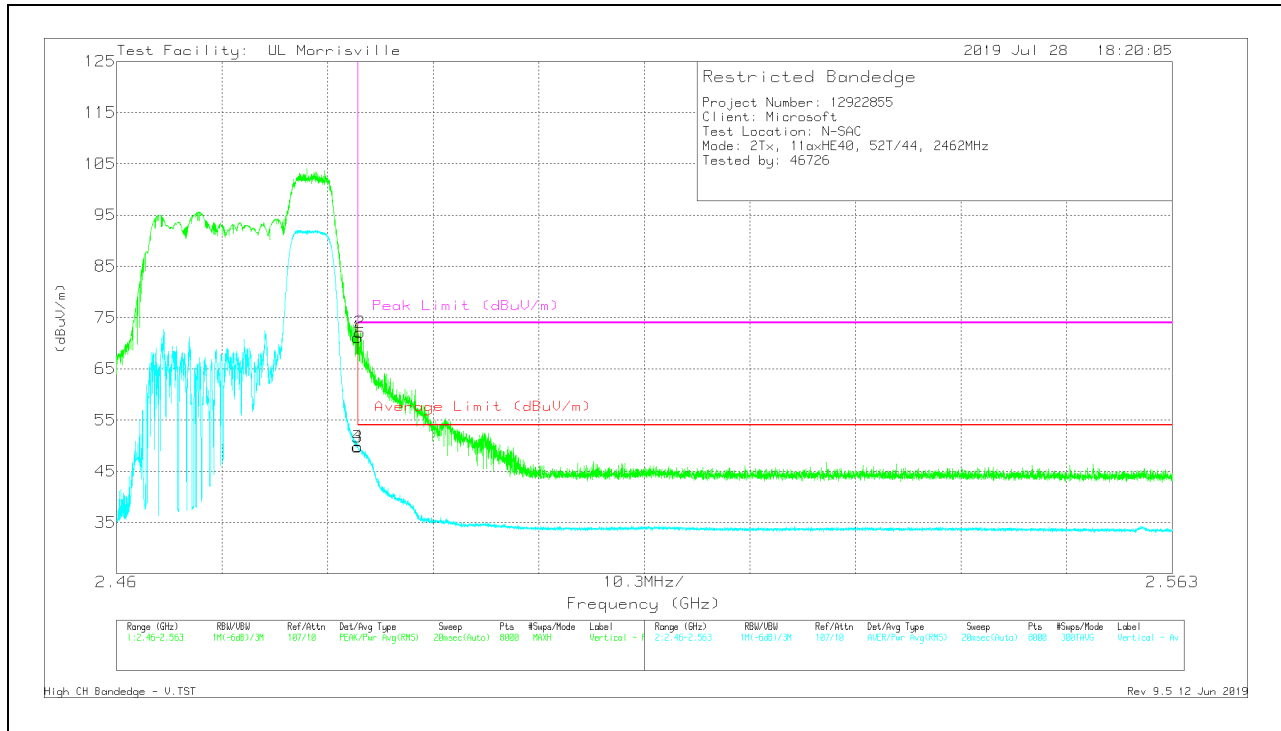

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/ Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.4835	63.06	Pk	32.4	-24.3	71.16	-	-	74	-2.84	171	204	V
2	* ** 2.48375	63.98	Pk	32.4	-24.3	72.08	-	-	74	-1.92	171	204	V
3	* ** 2.4835	41.59	RMS	32.4	-24.3	49.69	54	-4.31	-	-	171	204	V
4	* ** 2.48353	41.75	RMS	32.4	-24.3	49.85	54	-4.15	-	-	171	204	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

RMS - RMS detection

2TX Antenna 1 + Antenna 2 MODE: 26-Tones, RU index 0

BANDEDGE (LOW CHANNEL, CH 3)

HORIZONTAL RESULT

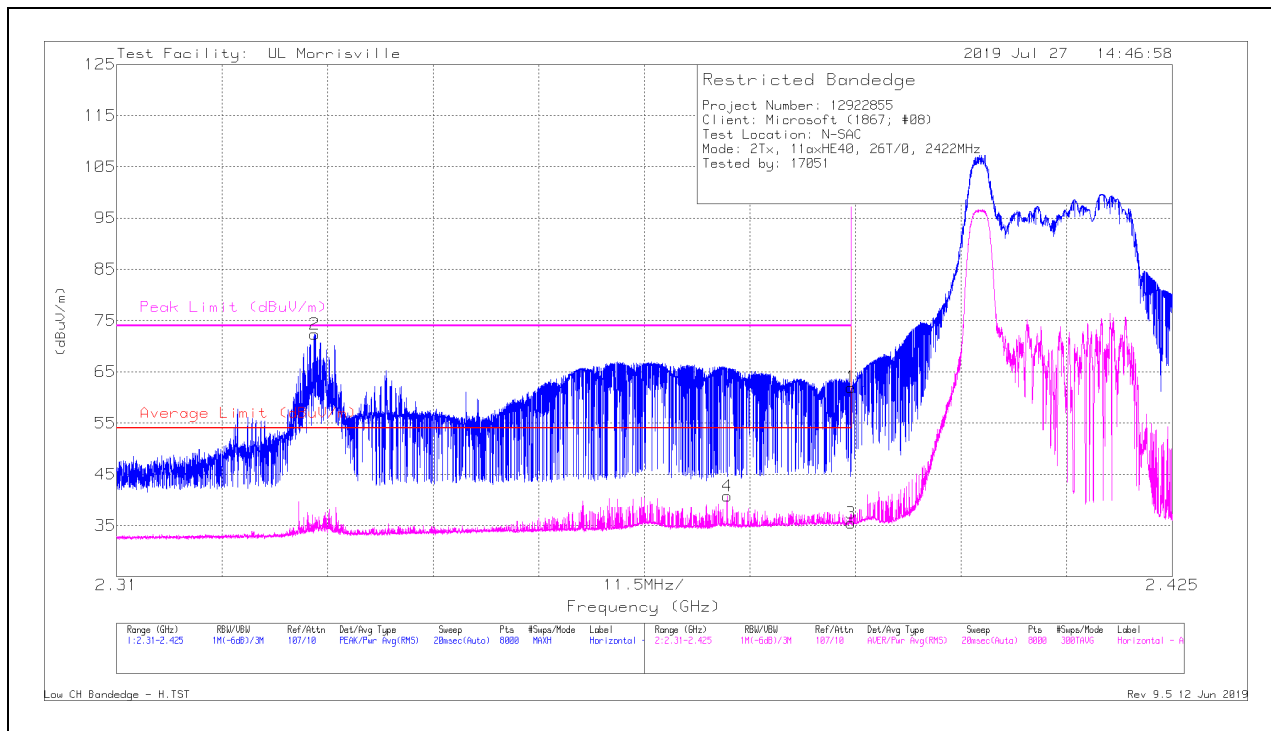

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/ Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.38999	54.36	Pk	32	-24.4	61.96	-	-	74	-12.04	16	387	H
2	* ** 2.33158	65.04	Pk	31.7	-24.4	72.34	-	-	74	-1.66	16	387	H
3	* ** 2.38999	27.85	RMS	32	-24.4	35.45	54	-18.55	-	-	16	387	H
4	* ** 2.37652	33.25	RMS	31.9	-24.4	40.75	54	-13.25	-	-	16	387	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

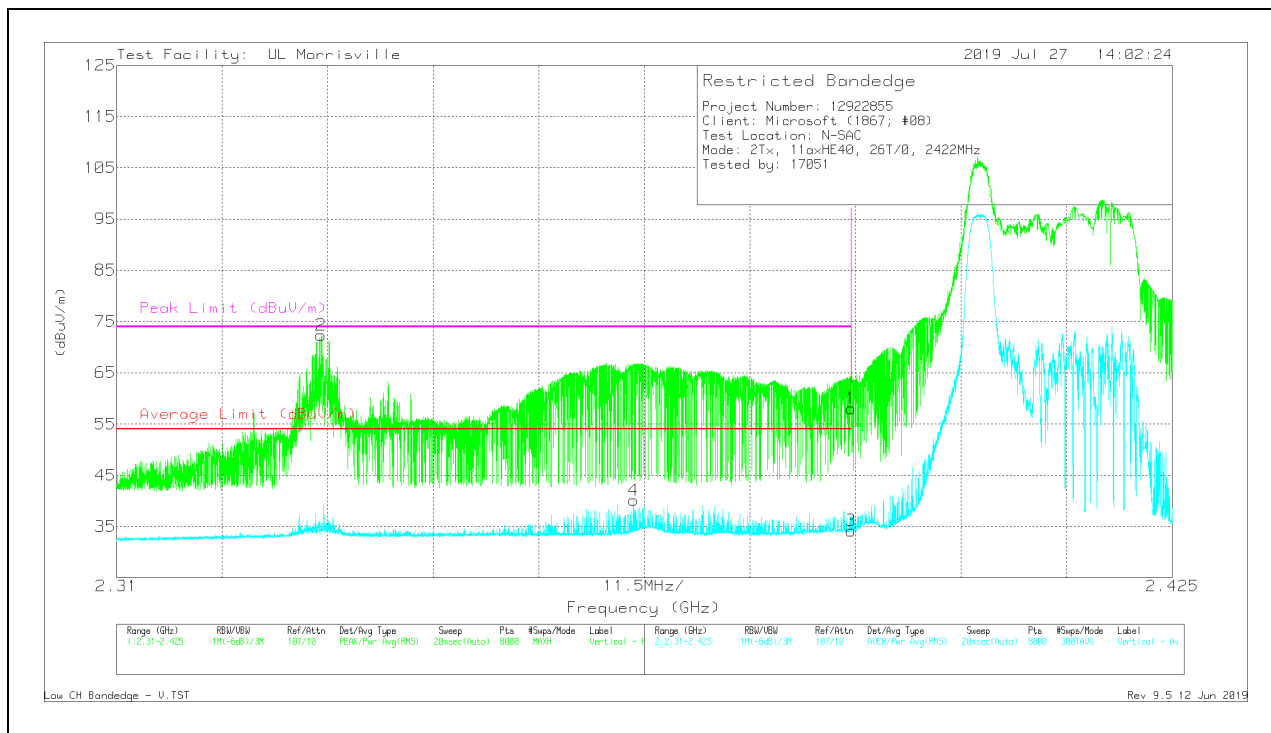

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/ Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.38999	50.44	Pk	32	-24.4	58.04	-	-	74	-15.96	331	288	V
2	*** 2.33227	65.06	Pk	31.7	-24.4	72.36	-	-	74	-1.64	331	288	V
3	*** 2.38999	26.6	RMS	32	-24.4	34.2	54	-19.8	-	-	331	288	V
4	*** 2.36632	32.72	RMS	31.8	-24.4	40.12	54	-13.88	-	-	331	288	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 4)

HORIZONTAL RESULT

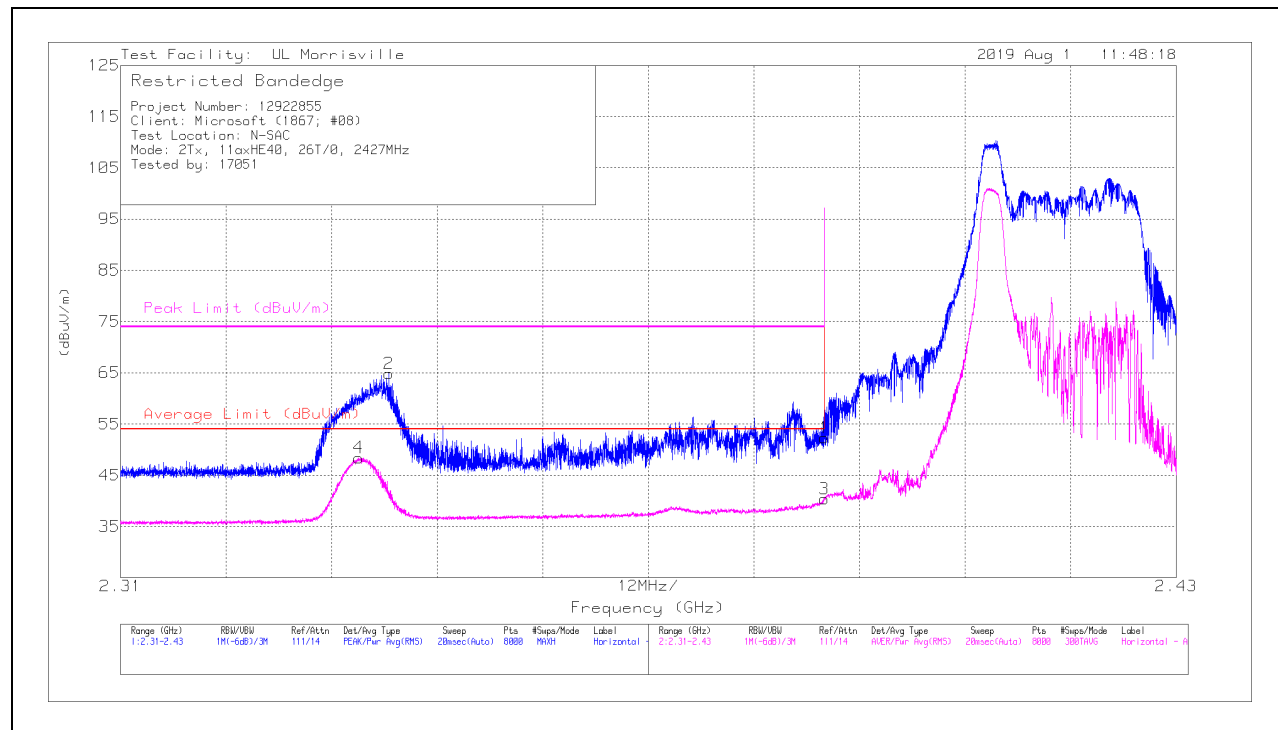

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.38999	44.73	Pk	32	-24.4	52.33	-	-	74	-21.67	18	380	H
2	* ** 2.3405	57.41	Pk	31.8	-24.4	64.81	-	-	74	-9.19	18	380	H
3	* ** 2.38999	32.79	RMS	32	-24.4	40.39	54	-13.61	-	-	18	380	H
4	* ** 2.33703	41.13	RMS	31.7	-24.4	48.43	54	-5.57	-	-	18	380	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

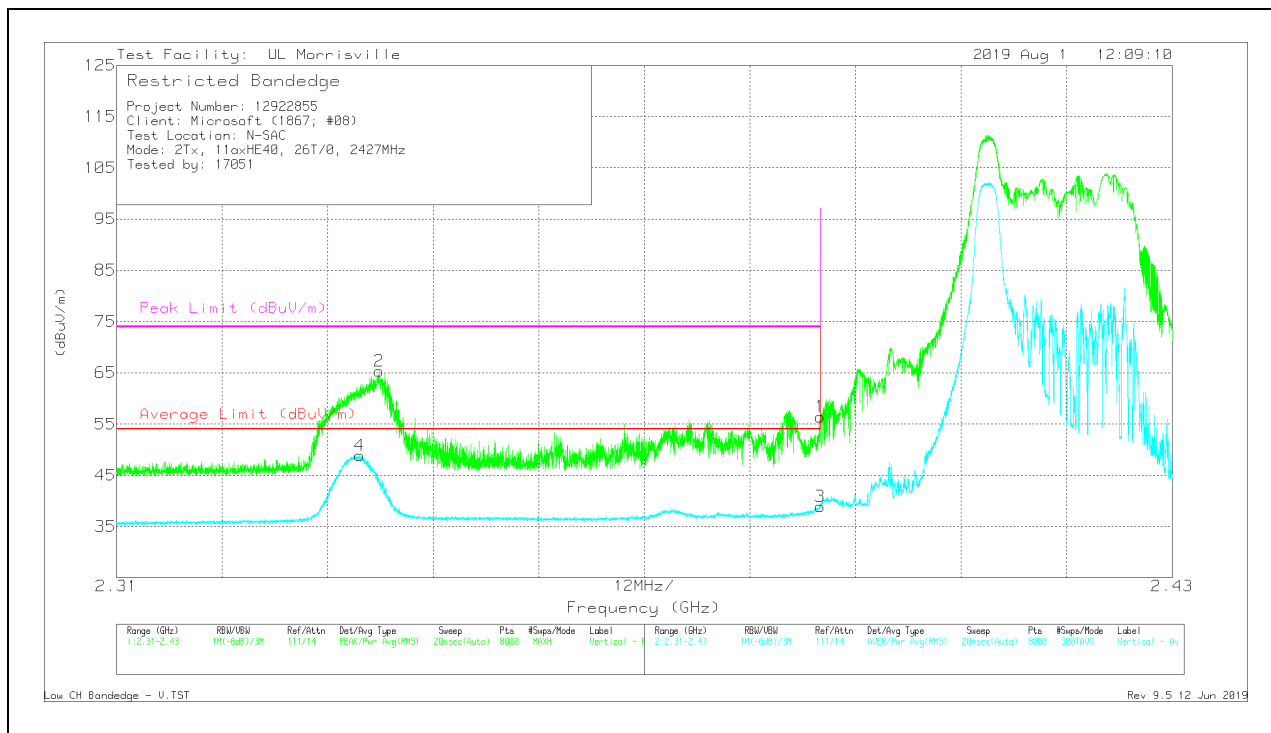

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.38999	48.81	Pk	32	-24.4	56.41	-	-	74	-17.59	0	382	V
2	*** 2.33985	58.06	Pk	31.7	-24.4	65.36	-	-	74	-8.64	0	382	V
3	*** 2.38999	31.29	RMS	32	-24.4	38.89	54	-15.11	-	-	0	382	V
4	*** 2.33765	41.58	RMS	31.7	-24.4	48.88	54	-5.12	-	-	0	382	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

RMS - RMS detection

2TX Antenna 1 + Antenna 2 MODE: 26-Tones, RU index 17

BANDEDGE (HIGH CHANNEL, CH 9)

HORIZONTAL RESULT

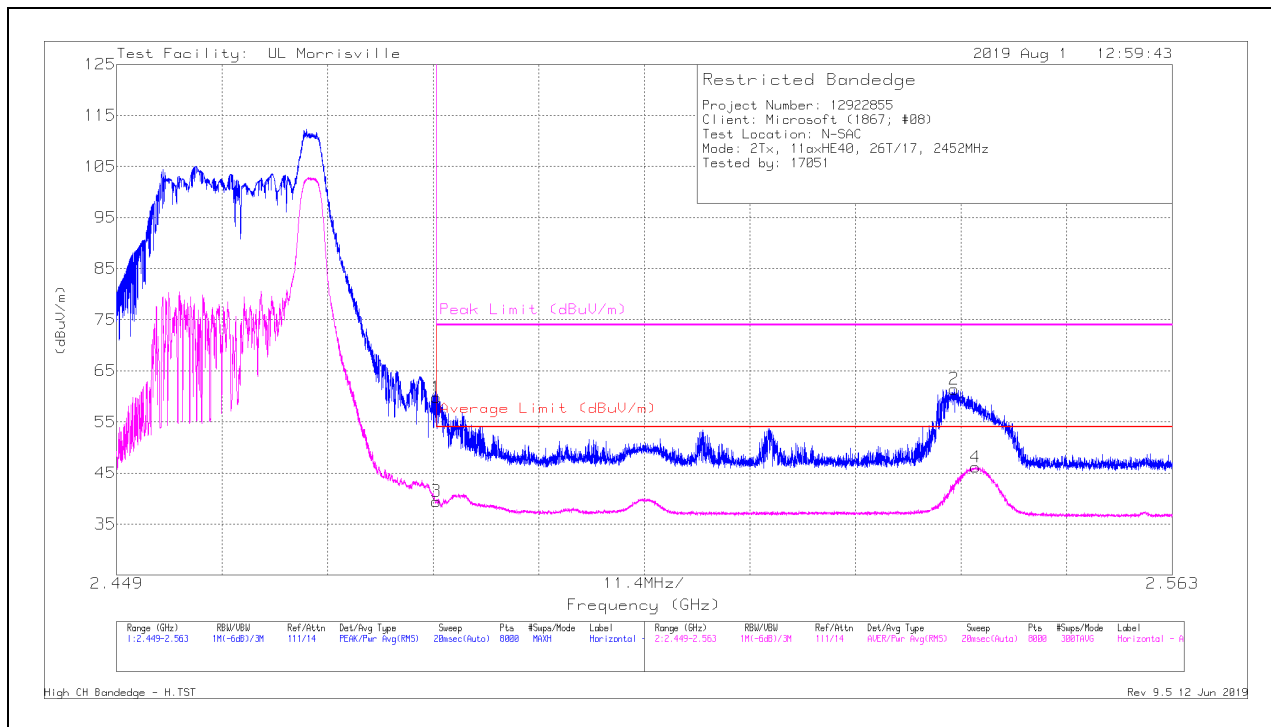

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.4835	51.67	Pk	32.4	-24.3	59.77	-	-	74	-14.23	17	401	H
2	** 2.53944	53.25	Pk	32.5	-24.3	61.45	-	-	74	-12.55	17	401	H
3	*** 2.4835	31.35	RMS	32.4	-24.3	39.45	54	-14.55	-	-	17	401	H
4	** 2.54174	37.97	RMS	32.5	-24.3	46.17	54	-7.83	-	-	17	401	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

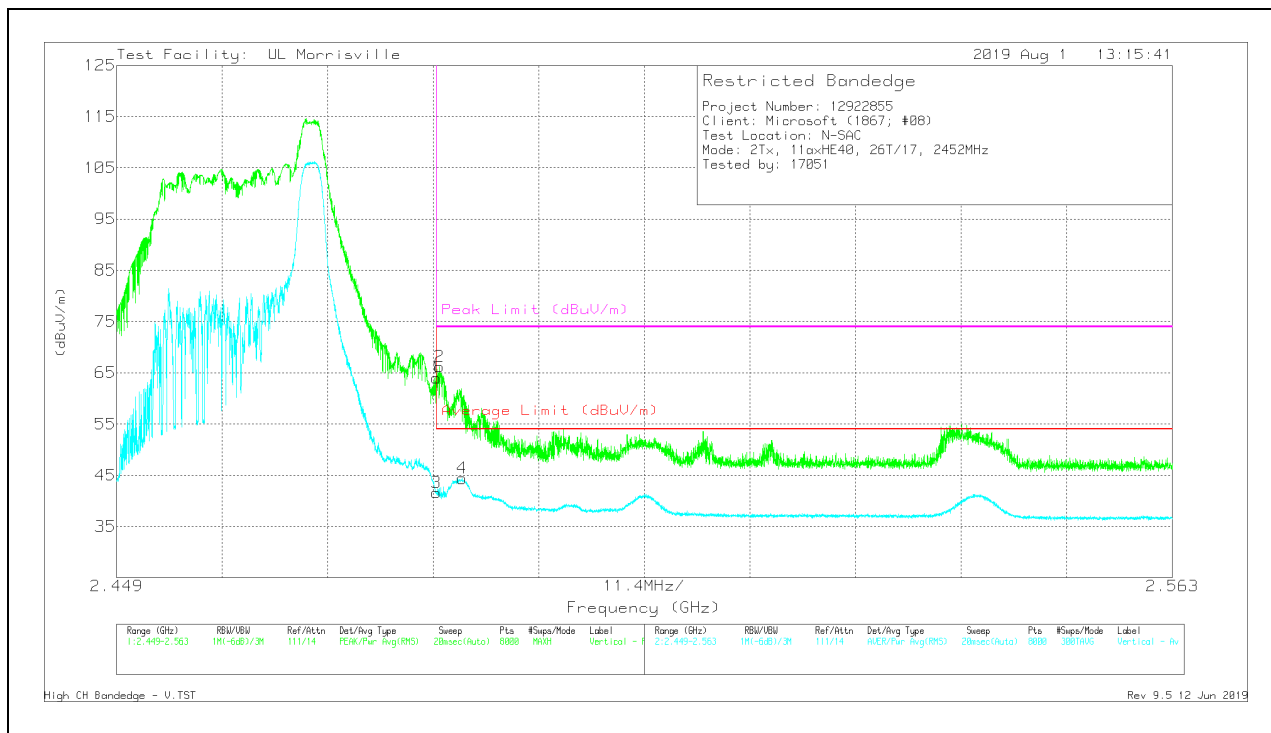

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/ Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.4835	55.9	Pk	32.4	-24.3	64	-	-	74	-10	5	382	V
2	*** 2.48386	58.09	Pk	32.4	-24.3	66.19	-	-	74	-7.81	5	382	V
3	*** 2.4835	33.49	RMS	32.4	-24.3	41.59	54	-12.41	-	-	5	382	V
4	*** 2.48631	36.29	RMS	32.4	-24.3	44.39	54	-9.61	-	-	5	382	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 10)

HORIZONTAL RESULT

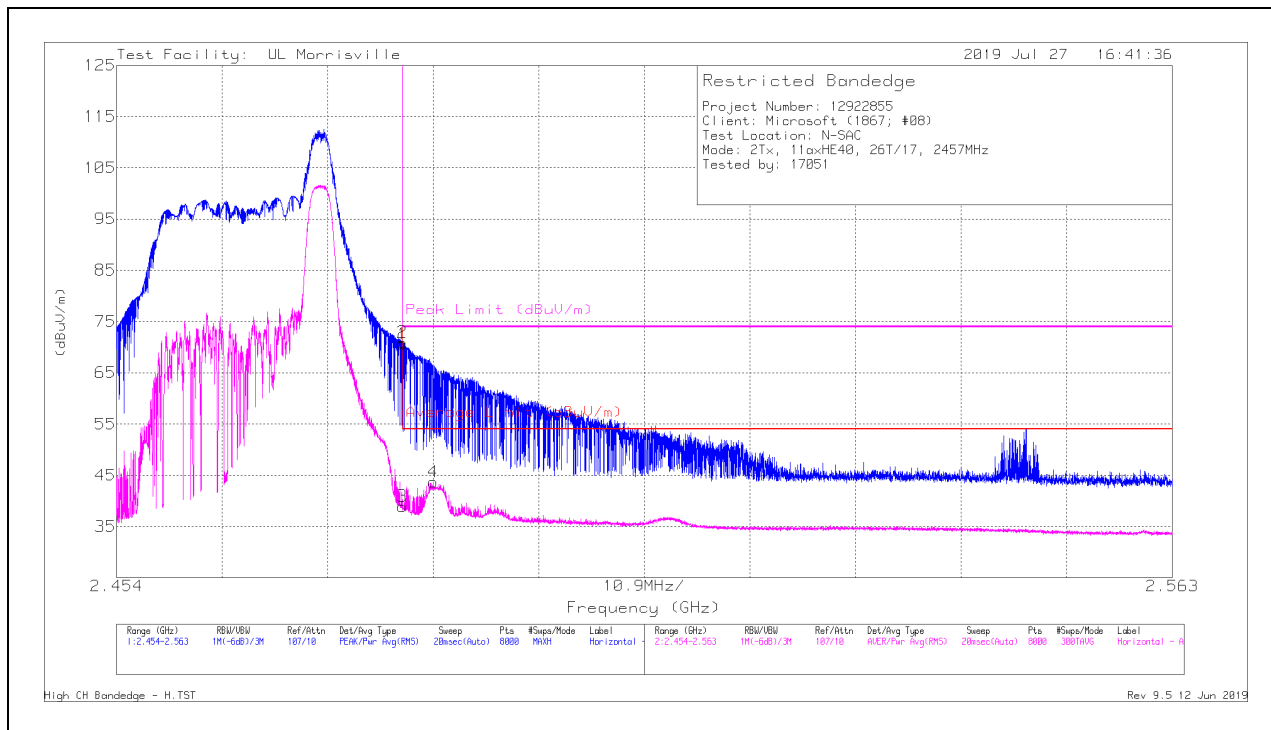

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.4835	62.55	Pk	32.4	-24.3	70.65	-	-	74	-3.35	20	378	H
2	*** 2.48352	62.82	Pk	32.4	-24.3	70.92	-	-	74	-3.08	20	378	H
3	*** 2.4835	30.85	RMS	32.4	-24.3	38.95	54	-15.05	-	-	20	378	H
4	*** 2.48666	35.57	RMS	32.4	-24.3	43.67	54	-10.33	-	-	20	378	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

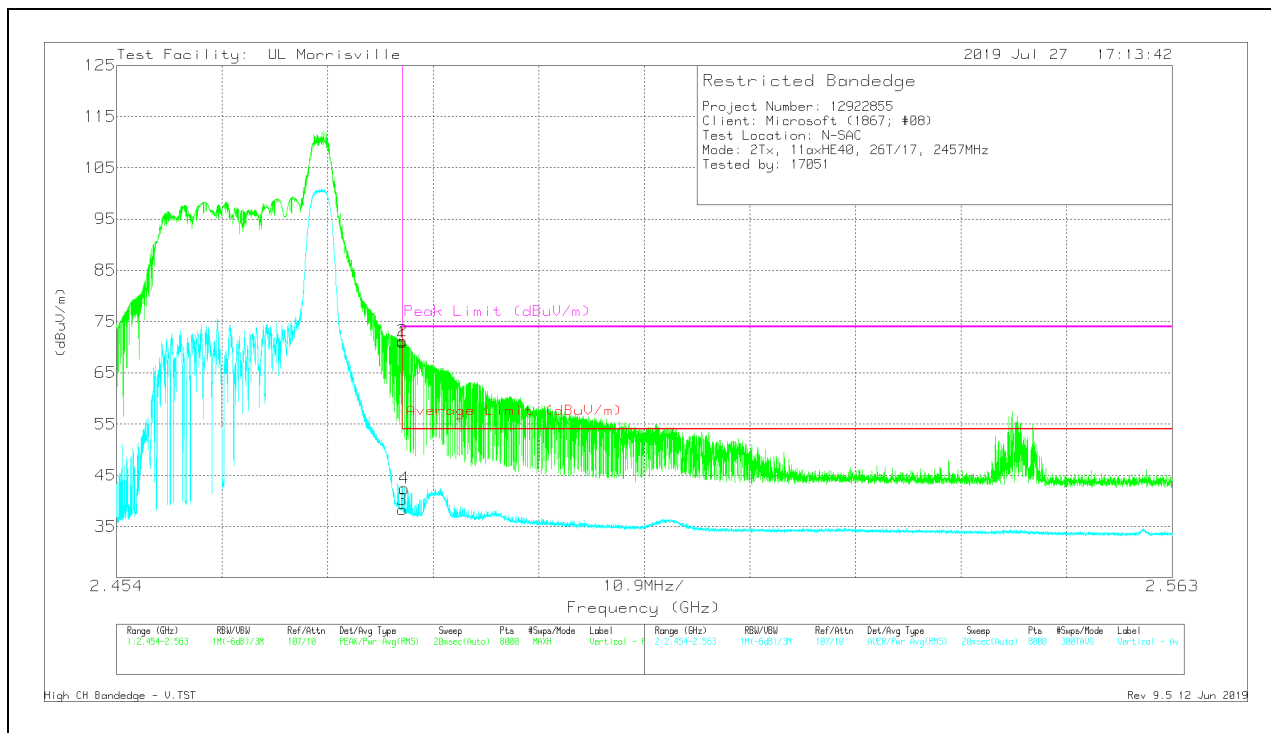

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.4835	62.89	Pk	32.4	-24.3	70.99	-	-	74	-3.01	4	381	V
2	*** 2.48353	63.14	Pk	32.4	-24.3	71.24	-	-	74	-2.76	4	381	V
3	*** 2.4835	30.18	RMS	32.4	-24.3	38.28	54	-15.72	-	-	4	381	V
4	*** 2.48371	34.33	RMS	32.4	-24.3	42.43	54	-11.57	-	-	4	381	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)

HORIZONTAL RESULT

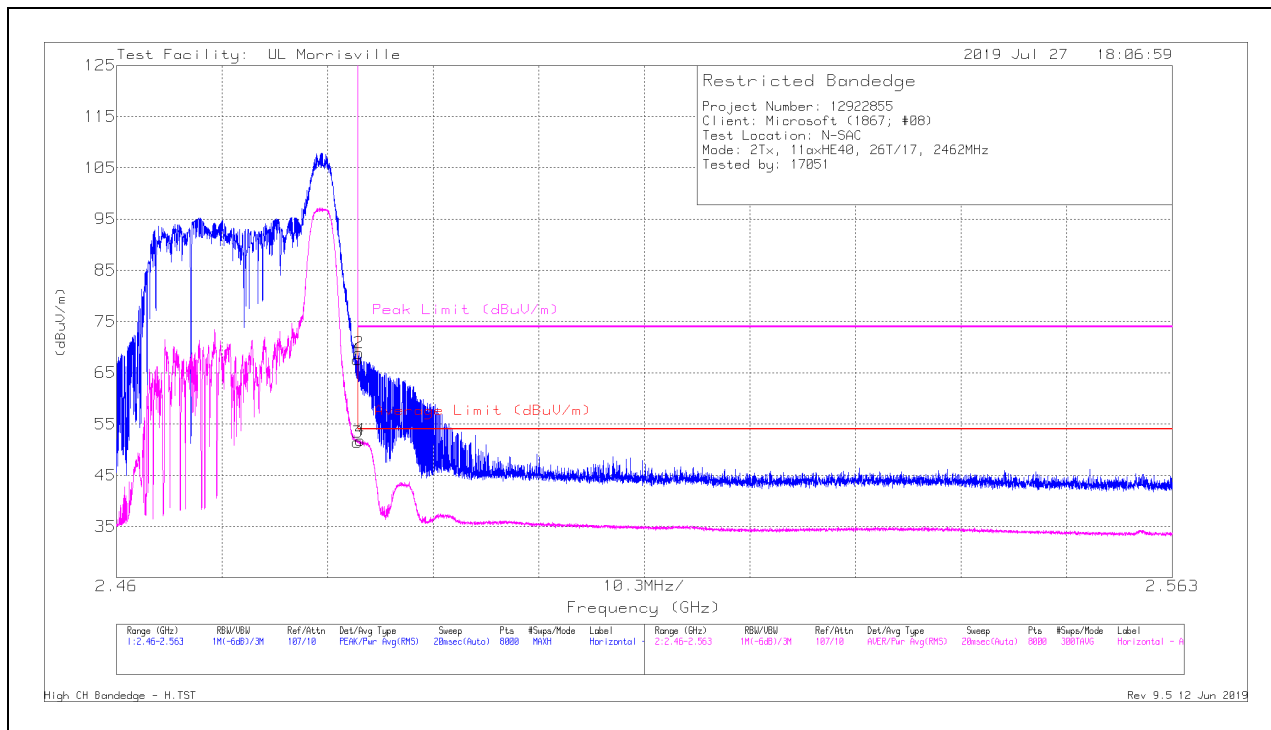

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/ Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 2.4835	59.43	Pk	32.4	-24.3	67.53	-	-	74	-6.47	18	379	H
2	*** 2.48367	60.75	Pk	32.4	-24.3	68.85	-	-	74	-5.15	18	379	H
3	*** 2.4835	43.33	RMS	32.4	-24.3	51.43	54	-2.57	-	-	18	379	H
4	*** 2.48378	43.78	RMS	32.4	-24.3	51.88	54	-2.12	-	-	18	379	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

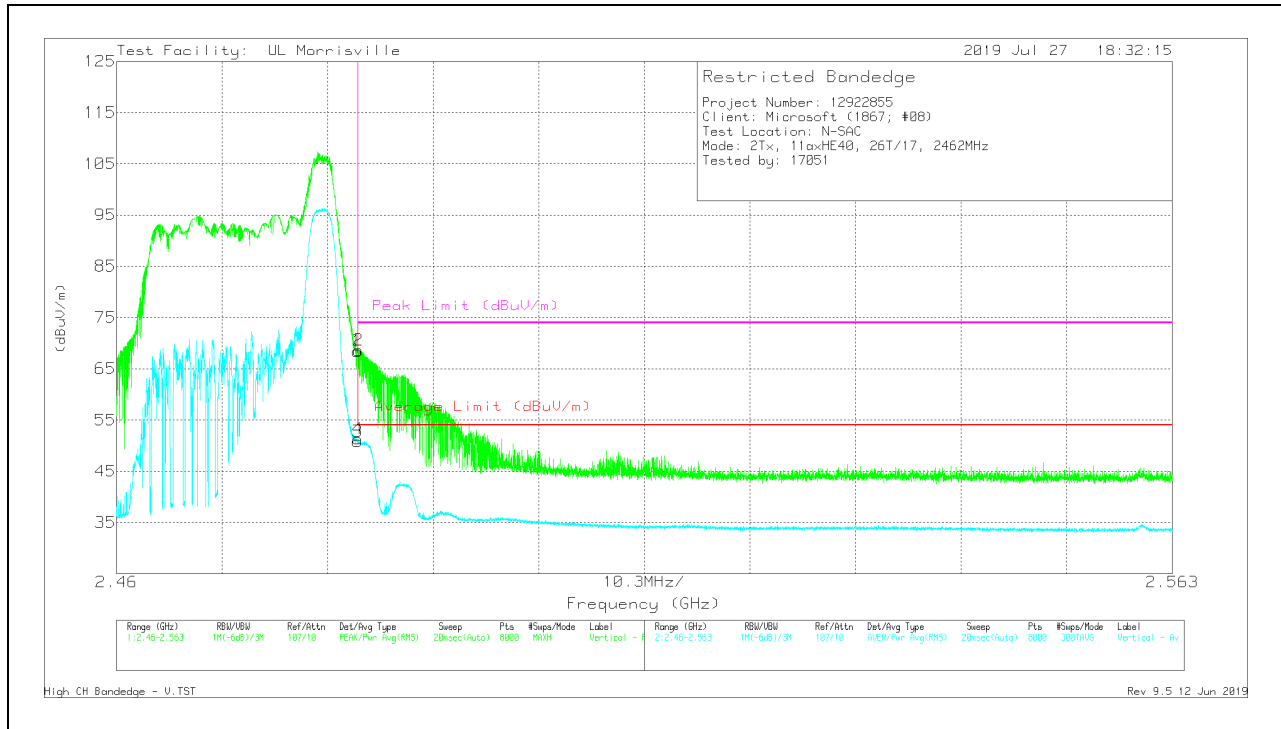

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0067 AF (dBuV/m)	Amp/Cbl/ Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.4835	60.36	Pk	32.4	-24.3	68.46	-	-	74	-5.54	5	383	V
2	* ** 2.48362	60.5	Pk	32.4	-24.3	68.6	-	-	74	-5.4	5	383	V
3	* ** 2.4835	42.76	RMS	32.4	-24.3	50.86	54	-3.14	-	-	5	383	V
4	* ** 2.48354	43.2	RMS	32.4	-24.3	51.3	54	-2.7	-	-	5	383	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

RMS - RMS detection

9.3. WORST CASE BELOW 1 GHz AND ABOVE 18 GHz

Please refer to R12922855-E3 for Worst Case emissions below 1 GHz and above 18 GHz results.

10. AC POWER LINE CONDUCTED EMISSIONS

Please refer to R12922855-E3 for AC Line Conducted results.

11. SETUP PHOTOS

Please refer to R12922855-EP1 for setup photos.

END OF TEST REPORT