



# **CERTIFICATION TEST REPORT**

**Report Number. :** 12857633-E2V2

**Applicant :** Microsoft Corporation  
One Microsoft Way  
Redmond, WA 98052-6399  
USA

**Model :** 1873

**FCC ID :** C3K1873

**IC :** 3048A-1873

**EUT Description :** Portable Computing Device

**Test Standard(s) :** FCC 47 CFR PART 15 SUBPART C  
ISED RSS-247 ISSUE 2  
ISED RSS-GEN ISSUE 5

**Date Of Issue:**  
September 16, 2019

**Prepared by:**  
UL Verification Services Inc.  
47173 Benicia Street  
Fremont, CA 94538 U.S.A.  
TEL: (510) 319-4000  
FAX: (510) 661-0888



NVLAP Lab code: 200065-0

## REPORT REVISION HISTORY

| Rev. | Issue Date | Revisions                   | Revised By |
|------|------------|-----------------------------|------------|
| V1   | 9/3/2019   | Initial Issue               | ---        |
| V2   | 9/16/2019  | Section 9: Revision updated | Henry Lau  |

## TABLE OF CONTENTS

|                                                           |           |
|-----------------------------------------------------------|-----------|
| <b>REPORT REVISION HISTORY .....</b>                      | <b>2</b>  |
| <b>TABLE OF CONTENTS .....</b>                            | <b>3</b>  |
| <b>1. ATTESTATION OF TEST RESULTS .....</b>               | <b>5</b>  |
| <b>2. TEST METHODOLOGY .....</b>                          | <b>7</b>  |
| <b>3. FACILITIES AND ACCREDITATION .....</b>              | <b>7</b>  |
| <b>4. CALIBRATION AND UNCERTAINTY .....</b>               | <b>8</b>  |
| 4.1. MEASURING INSTRUMENT CALIBRATION .....               | 8         |
| 4.2. SAMPLE CALCULATION .....                             | 8         |
| 4.3. MEASUREMENT UNCERTAINTY .....                        | 8         |
| <b>5. EQUIPMENT UNDER TEST .....</b>                      | <b>9</b>  |
| 5.1. EUT DESCRIPTION .....                                | 9         |
| 5.2. MAXIMUM OUTPUT POWER .....                           | 9         |
| 5.3. DESCRIPTION OF AVAILABLE ANTENNAS .....              | 9         |
| 5.4. SOFTWARE AND FIRMWARE .....                          | 9         |
| 5.5. WORST-CASE CONFIGURATION AND MODE .....              | 9         |
| 5.6. DESCRIPTION OF TEST SETUP .....                      | 10        |
| <b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>            | <b>13</b> |
| <b>7. MEASUREMENT METHODS .....</b>                       | <b>14</b> |
| <b>8. ANTENNA PORT TEST RESULTS .....</b>                 | <b>15</b> |
| 8.1. ON TIME AND DUTY CYCLE .....                         | 15        |
| 8.2. 20 dB AND 99% BANDWIDTH .....                        | 16        |
| 8.2.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION .....    | 17        |
| 8.2.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION ..... | 18        |
| 8.3. HOPPING FREQUENCY SEPARATION .....                   | 19        |
| 8.3.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION .....    | 20        |
| 8.3.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION ..... | 21        |
| 8.4. NUMBER OF HOPPING CHANNELS .....                     | 22        |
| 8.4.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION .....    | 23        |
| 8.4.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION ..... | 25        |
| 8.5. AVERAGE TIME OF OCCUPANCY .....                      | 27        |
| 8.5.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION .....    | 28        |
| 8.5.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION ..... | 30        |
| 8.6. OUTPUT POWER .....                                   | 32        |
| 8.6.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION .....    | 33        |

|         |                                                     |    |
|---------|-----------------------------------------------------|----|
| 8.6.2.  | BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION.....   | 33 |
| 8.6.3.  | BLUETOOTH ENHANCED DATA RATE DQPSK MODULATION ..... | 33 |
| 8.7.    | AVERAGE POWER .....                                 | 34 |
| 8.7.1.  | BLUETOOTH BASIC DATA RATE GFSK MODULATION .....     | 35 |
| 8.7.2.  | BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION.....   | 35 |
| 8.7.3.  | BLUETOOTH ENHANCED DATA RATE DQPSK MODULATION ..... | 35 |
| 8.8.    | CONDUCTED SPURIOUS EMISSIONS.....                   | 36 |
| 8.8.1.  | BLUETOOTH BASIC DATA RATE GFSK MODULATION .....     | 37 |
| 8.8.2.  | BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION.....   | 39 |
| 9.      | RADIATED TEST RESULTS.....                          | 41 |
| 9.1.    | TRANSMITTER ABOVE 1 GHz .....                       | 43 |
| 9.1.1.  | BLUETOOTH BASIC DATA RATE GFSK MODULATION .....     | 43 |
| 9.1.2.  | BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION.....   | 53 |
| 9.2.    | SPURIOUS EMISSIONS FOR COLLOCATION.....             | 63 |
| 9.2.1.  | TEST CASE 1.....                                    | 64 |
| 9.3.    | WORST CASE BELOW 30MHZ .....                        | 66 |
| 9.4.    | WORST CASE BELOW 1 GHZ.....                         | 68 |
| 9.5.    | WORST CASE 18-26 GHZ .....                          | 70 |
| 10.     | AC POWER LINE CONDUCTED EMISSIONS .....             | 72 |
| 10.1.1. | AC Power Line Norm.....                             | 73 |
| 11.     | SETUP PHOTOS .....                                  | 75 |

## 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** Microsoft Corporation  
One Microsoft Way  
Redmond, WA 98052-6399  
USA

**EUT DESCRIPTION:** Portable Computing Device

**MODEL:** 1873

**SERIAL NUMBER:** 009075792757 (Conducted)  
009060692757 (Radiated)  
009059592757 (Radiated)

**DATE TESTED:** July 30, 2019 – August 09, 2019


| APPLICABLE STANDARDS     |              |
|--------------------------|--------------|
| STANDARD                 | TEST RESULTS |
| CFR 47 Part 15 Subpart C | Complies     |
| ISED RSS-247 Issue 2     | Complies     |
| ISED RSS-GEN Issue 5     | Complies     |

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of the U.S. government.

Approved & Released For  
UL Verification Services Inc. By:



---

FRANCISCO DE ANDA  
OPERATIONS LEADER  
Consumer Technology Division  
UL Verification Services Inc.

Prepared By:



---

Eric Yu  
TEST ENGINEER  
Consumer Technology Division  
UL Verification Services Inc.

Reviewed By:



---

Henry Lau  
PROJECT ENGINEER  
Consumer Technology Division  
UL Verification Services Inc.

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02, RSS-GEN Issue 5, and RSS-247 Issue 2, DA 00 -705.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, and 47658 Kato Road, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

| 47173 Benicia Street                          | 47266 Benicia Street               | 47658 Kato Road                               |
|-----------------------------------------------|------------------------------------|-----------------------------------------------|
| <input checked="" type="checkbox"/> Chamber A | <input type="checkbox"/> Chamber D | <input checked="" type="checkbox"/> Chamber I |
| <input type="checkbox"/> Chamber B            | <input type="checkbox"/> Chamber E | <input type="checkbox"/> Chamber J            |
| <input type="checkbox"/> Chamber C            | <input type="checkbox"/> Chamber F | <input type="checkbox"/> Chamber K            |
|                                               | <input type="checkbox"/> Chamber G | <input type="checkbox"/> Chamber L            |
|                                               | <input type="checkbox"/> Chamber H | <input type="checkbox"/> Chamber M            |

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers above are covered under Industry Canada company address and respective code: 2324A.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

#### **RADIATED EMISSIONS**

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)  
 $36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dBuV/m}$

#### **MAINS CONDUCTED EMISSIONS**

Where relevant, the following sample calculation is provided:

Final Voltage (dBuV) = Measured Voltage (dBuV) + Cable Loss (dB) + Limiter Factor (dB) + LISN Insertion Loss.  
 $36.5 \text{ dBuV} + 0 \text{ dB} + 10.1 \text{ dB} + 0 \text{ dB} = 46.6 \text{ dBuV}$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| PARAMETER                                           | UNCERTAINTY |
|-----------------------------------------------------|-------------|
| Worst Case Conducted Disturbance, 9KHz to 0.15 MHz  | 3.84 dB     |
| Worst Case Conducted Disturbance, 0.15 to 30 MHz    | 3.65 dB     |
| Worst Case Radiated Disturbance, 9KHz to 30 MHz     | 2.52 dB     |
| Worst Case Radiated Disturbance, 30 to 1000 MHz     | 4.88 dB     |
| Worst Case Radiated Disturbance, 1000 to 18000 MHz  | 4.24 dB     |
| Worst Case Radiated Disturbance, 18000 to 26000 MHz | 4.37 dB     |
| Worst Case Radiated Disturbance, 26000 to 40000 MHz | 5.17 dB     |

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. EUT DESCRIPTION

The EUT is a Portable Computing Device.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

| Frequency Range<br>(MHz) | Mode           | Output Power<br>(dBm) | Output Power<br>(mW) |
|--------------------------|----------------|-----------------------|----------------------|
| 2402 - 2480              | Basic GFSK     | 3.70                  | 2.34                 |
| 2402 - 2480              | Enhanced DQPSK | 5.42                  | 3.48                 |
| 2402 - 2480              | Enhanced 8PSK  | 5.80                  | 3.80                 |

Note: GFSK, DQPSK, 8PSK average Power are all investigated. See section 8.7

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PIFA antenna, with a maximum gain of -2.2 dBi.

### 5.4. SOFTWARE AND FIRMWARE

The operating system installed on the EUT is Windows 10 Pro build 18362.19h1\_release.190318-1202.

The Driver installed on the EUT is version 12.0.0.835.

The test utility software used during testing was QRCT v4.0.00125

### 5.5. WORST-CASE CONFIGURATION AND MODE

Radiated emissions below 30MHz, 1GHz, above 18GHz, and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Band edge and radiated emissions between 1GHz and 18GHz were performed with the EUT set to transmit at the highest power on low, middle and high channels.

The EUT has one intended orientations, X; therefore, all final radiated testing was performed with the EUT in X orientation.

Worst-case data rates as provided by the client were:

GFSK mode: DH5  
8PSK mode: 3-DH5

## 5.6. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

| Support Equipment List           |              |             |                            |                   |
|----------------------------------|--------------|-------------|----------------------------|-------------------|
| Description                      | Manufacturer | Model       | Serial Number              | FCC ID            |
| AC DC Adapter                    | Microsoft    | 1706        | 0CI30J0IZ9396              | DoC               |
| AC DC Adapter                    | Lenovo       | ADLX45NDC2A | 11S45N0291Z1ZS925<br>3E2N9 | DoC               |
| Laptop                           | Lenovo       | E555        | 6449237                    | TX2-<br>RTL8723BE |
| Mouse                            | Logitech     | B100        | 1451HS05PX68               | DoC               |
| USB 3.0 Gigabit Ethernet Adapter | Linksys      | 1113        | X821908-002                | DoC               |
| USB Type C to Audio Jack         | SONY         | A1-0231     | N/A                        | DoC               |

### I/O CABLES (CONDUCTED TEST)

| I/O Cable List |          |                      |                |             |                  |                                    |
|----------------|----------|----------------------|----------------|-------------|------------------|------------------------------------|
| Cable No       | Port     | # of identical ports | Connector Type | Cable Type  | Cable Length (m) | Remarks                            |
| 1              | AC       | 1                    | AC             | Un-Shielded | 1                | to AC/DC Adaptor                   |
| 2              | DC       | 1                    | DC             | Shielded    | 1.2              | to Laptop, to EUT                  |
| 3              | Antenna  | 1                    | SMA            | Un-Shielded | 0.2              | to Analyzer                        |
| 4              | USB      | 1                    | TYPE A         | Shielded    | 0.2              | USB-A to RJ45 converter            |
| 5              | Ethernet | 1                    | RJ45           | Un-Shielded | 0.5              | Support Laptop to Ethernet Adapter |
| 6              | AC       | 1                    | AC             | Un-Shielded | 1                | to AC/DC Adaptor                   |
| 7              | DC       | 1                    | DC             | Shielded    | 1.2              | to Support Equipment               |


### I/O CABLES (RADIATED AND CONDUCTED EMISSIONS)

| I/O Cable List |          |                      |                |             |                  |                               |
|----------------|----------|----------------------|----------------|-------------|------------------|-------------------------------|
| Cable No       | Port     | # of identical ports | Connector Type | Cable Type  | Cable Length (m) | Remarks                       |
| 1              | AC       | 1                    | AC             | Un-shielded | 1                | to AC/DC Adapter              |
| 2              | DC       | 1                    | DC             | Shielded    | 1.2              | to EUT                        |
| 3              | USB      | 1                    | TYPE A         | Shielded    | 1.5              | EUT to Mouse                  |
| 4              | USB      | 1                    | Type C         | Shielded    | 0.1              | USB-C to Audio Jack converter |
| 5              | Earphone | 2                    | 3.5mm          | Un-shielded | 1                | EUT to earphone               |

## TEST SETUP

The EUT is connected to a test laptop during the tests. Test software exercised the radio card.


## CONDUCTED TEST SETUP DIAGRAM

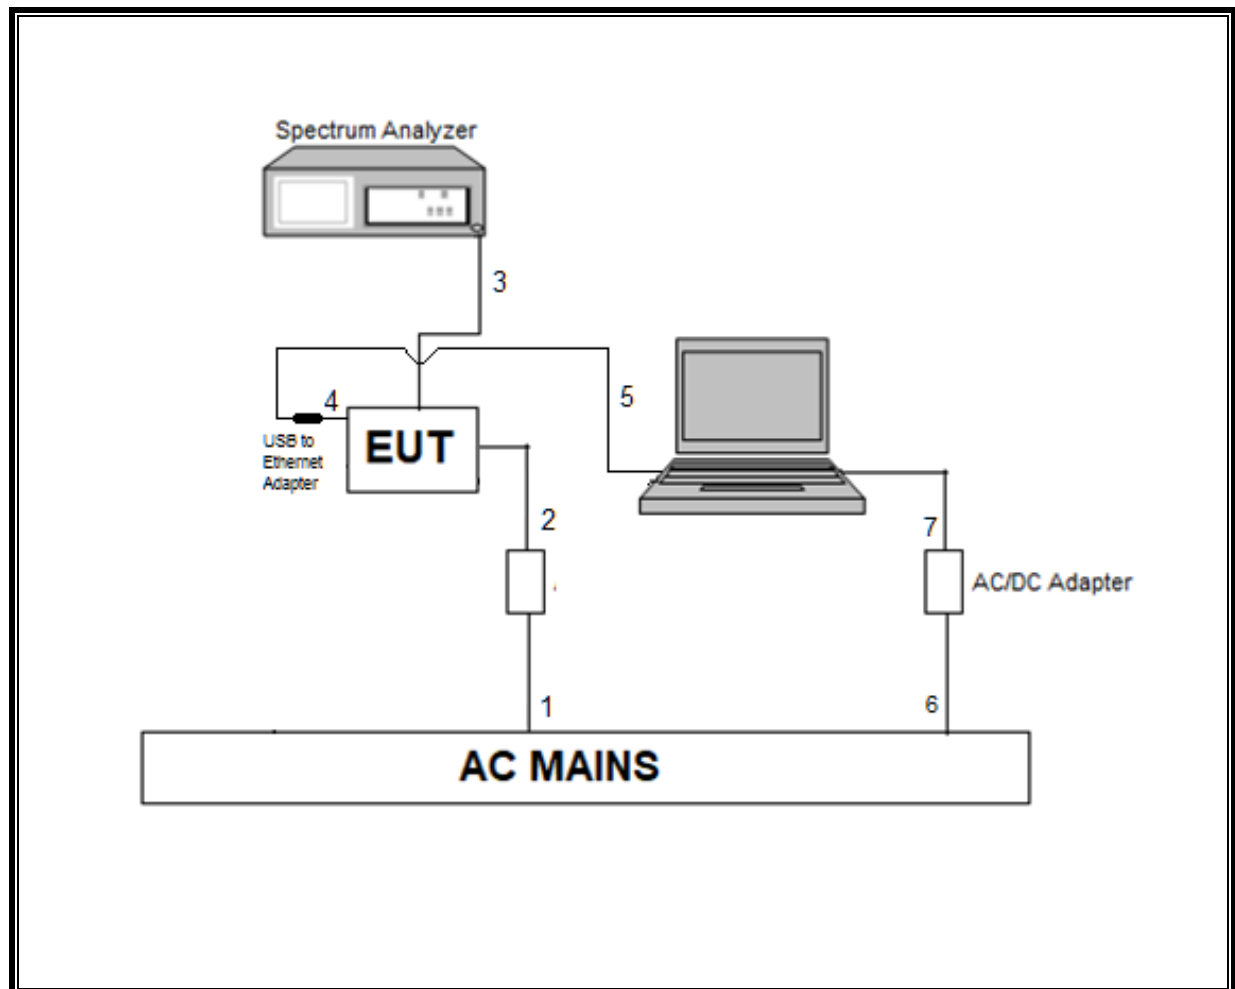

## TEST SETUP

For conducted tests, the EUT was connected to a laptop. The test software exercises the radio.

### **RADIATED AND AC LINE CONDUCTED EMISSIONS SETUP DIAGRAM**

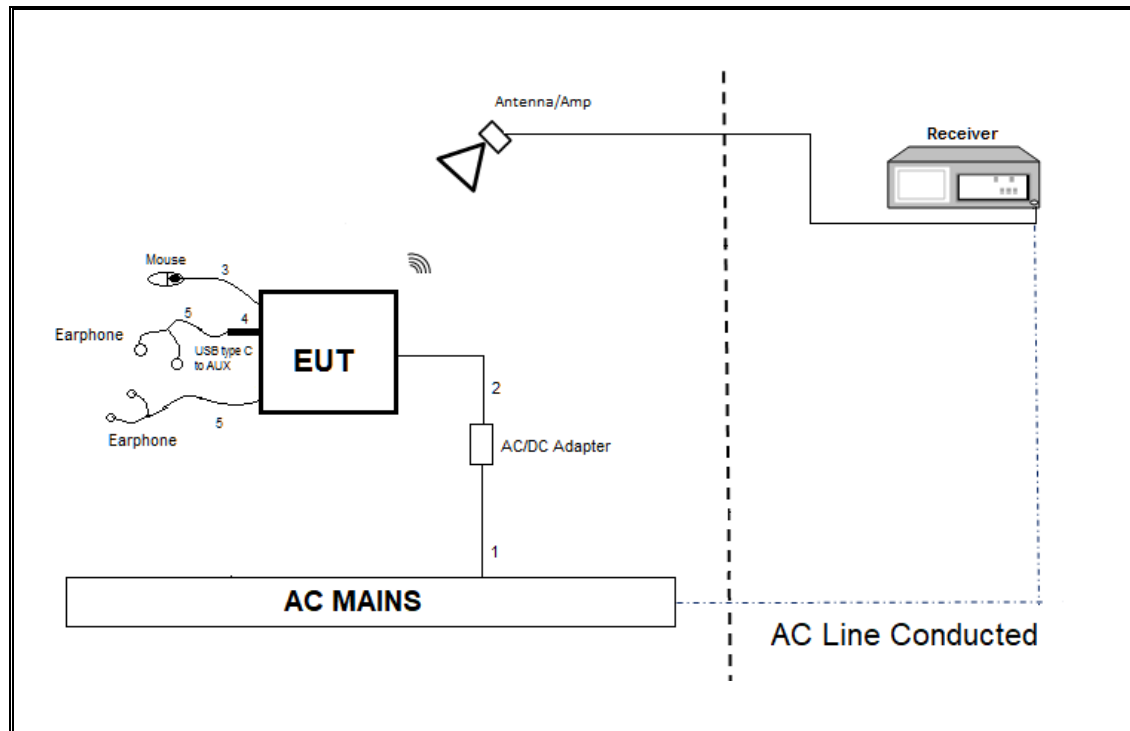

### **TEST SETUP**

For radiated tests and AC line conducted tests: EUT is connected to all support equipment. The test software exercises the radio. Support laptop was removed after EUT was configured.

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

| TEST EQUIPMENT LIST                              |                                 |                        |                           |            |            |
|--------------------------------------------------|---------------------------------|------------------------|---------------------------|------------|------------|
| Description                                      | Manufacturer                    | Model                  | ID Num                    | Cal Due    | Last Cal   |
| Antenna, Passive Loop 30Hz to 1MHz               | ELETRO METRICS                  | EM-6871                | PRE0179465                | 05/31/2020 | 05/31/2019 |
| Antenna, Passive Loop 100kHz to 30MHz            | ELETRO METRICS                  | EM-6872                | PRE0179467                | 05/31/2020 | 05/31/2019 |
| Horn Antenna 1-18GHz                             | ETS-Lindgren                    | 3117                   | T862                      | 06/05/2020 | 06/05/2019 |
| Amplifier, 1 to18GHz                             | MITEQ                           | AFS42-00101800-25-S-42 | PRE0181078                | 08/31/2019 | 08/01/2018 |
| Amplifier, 1 to18GHz                             | MITEQ                           | AFS42-00101800-25-S-42 | PRE0181078                | 08/24/2020 | 08/24/2019 |
| Horn Antenna 1-18GHz                             | ETS-Lindgren                    | 3117                   | T346                      | 05/14/2020 | 05/14/2019 |
| Amplifier, 1 to18GHz                             | MITEQ                           | AFS42-00101800-25-S-42 | T1165                     | 05/24/2020 | 05/24/2019 |
| Antenna, Broadband Hybrid, 30MHz to 3GHz         | Sunol Sciences Corp.            | JB3                    | PRE0184971                | 11/13/2019 | 11/13/2018 |
| Amplifier, 9kHz to 1GHz, 32 dB                   | Sonoma Instrument               | 310                    | PRE0180175                | 06/29/2020 | 06/29/2019 |
| Antenna, Horn 18 to 26.5GHz                      | ARA                             | MWH-1826/B             | PRE0182188                | 08/29/2019 | 08/29/2018 |
| Rf Amplifier, 18-26.5GHz, 60dB gain              | Ampical                         | AMP18G26.5-60          | PRE0181238                | 05/01/2020 | 05/01/2019 |
| Power Meter, P-series single channel             | Agilent (Keysight) Technologies | N1911A                 | T1265                     | 01/29/2020 | 01/29/2019 |
| Power Sensor, P-series, 50MHz to 18GHz, Wideband | Agilent (Keysight) Technologies | N1921A                 | T1227                     | 02/05/2020 | 02/05/2019 |
| BRF 2400-2500 MHz                                | Micro-Tronics                   | BRM50702-02            | T1784                     | 07/19/2020 | 07/19/2019 |
| BRF 5470-5725 MHz                                | Micro-Tronics                   | BRM50704               | T1780                     | 06/24/2020 | 06/24/2019 |
| EMI Test Receiver                                | Rohde & Schwarz                 | ESW44                  | PRE0179376                | 02/14/2020 | 02/14/2019 |
| Spectrum Analyzer, PSA, 3Hz to 26.5GHz           | Agilent (Keysight) Technologies | E4440A                 | T200                      | 01/28/2020 | 01/28/2019 |
| AC Line Conducted                                |                                 |                        |                           |            |            |
| EMI Receiver                                     | Rohde & Schwarz                 | ESR                    | T1436                     | 02/14/2020 | 02/14/2019 |
| LISN for Conducted Emissions CISPR-16            | FCC INC.                        | FCC LISN 50/250        | T1310                     | 01/24/2020 | 01/24/2019 |
| Test Software List                               |                                 |                        |                           |            |            |
| Radiated Software                                | UL                              | UL EMC                 | Ver 9.5, June 15, 2019    |            |            |
| Antenna Port Software                            | UL                              | UL RF                  | Ver 10.0.1, July 23, 2019 |            |            |
| AC Line Conducted Software                       | UL                              | UL EMC                 | Ver 9.5, May 26, 2015     |            |            |

## 7. MEASUREMENT METHODS

On Time and Duty Cycle: ANSI C63.10-2013 Section 11.6

Occupied BW (20dB): ANSI C63.10-2013 Section 6.9.2

Occupied BW (99%): ANSI C63.10-2013 Section 6.9.3

Carrier Frequency Separation: ANSI C63.10-2013 Section 7.8.2

Number of Hopping Frequencies: ANSI C63.10-2013 Section 7.8.3

Time of Occupancy (Dwell Time): ANSI C63.10-2013 Section 7.8.4

Peak Output Power: ANSI C63.10-2013 Section 7.8.5

Conducted Spurious Emissions: ANSI C63.10-2013 Section 7.8.8

Conducted Band-Edge: ANSI C63.10-2013 Section 6.10.4

Radiated Spurious Emissions Below 30MHz: ANSI C63.10-2013 Section 6.4

Radiated Spurious Emissions 30-1000MHz: ANSI C63.10-2013 Section 6.3 and 6.5

Radiated Spurious Emissions above 1GHz: ANSI C63.10-2013 Section 6.3 and 6.6

Radiated Band-edge: ANSI C63.10-2013 Section 6.10.5

AC Power-line conducted emissions: ANSI C63.10-2013, Section 6.2.

## 8. ANTENNA PORT TEST RESULTS

### 8.1. ON TIME AND DUTY CYCLE

#### LIMITS

None; for reporting purposes only.


#### PROCEDURE

ANSI C63.10, Section 11.6 : Zero-Span Spectrum Analyzer Method.

#### ON TIME AND DUTY CYCLE RESULTS

| Mode           | ON Time<br>B<br>(msec) | Period<br>(msec) | Duty Cycle<br>x<br>(linear) | Duty<br>Cycle<br>(%) | Duty Cycle<br>Correction Factor<br>(dB) | 1/T<br>Minimum VBW<br>(kHz) |
|----------------|------------------------|------------------|-----------------------------|----------------------|-----------------------------------------|-----------------------------|
| Bluetooth GFSK | 2.88                   | 3.75             | 0.768                       | 76.8%                | 1.15                                    | 0.347                       |
| Bluetooth 8PSK | 2.89                   | 3.75             | 0.771                       | 77.1%                | 1.13                                    | 0.346                       |

#### DUTY CYCLE PLOTS

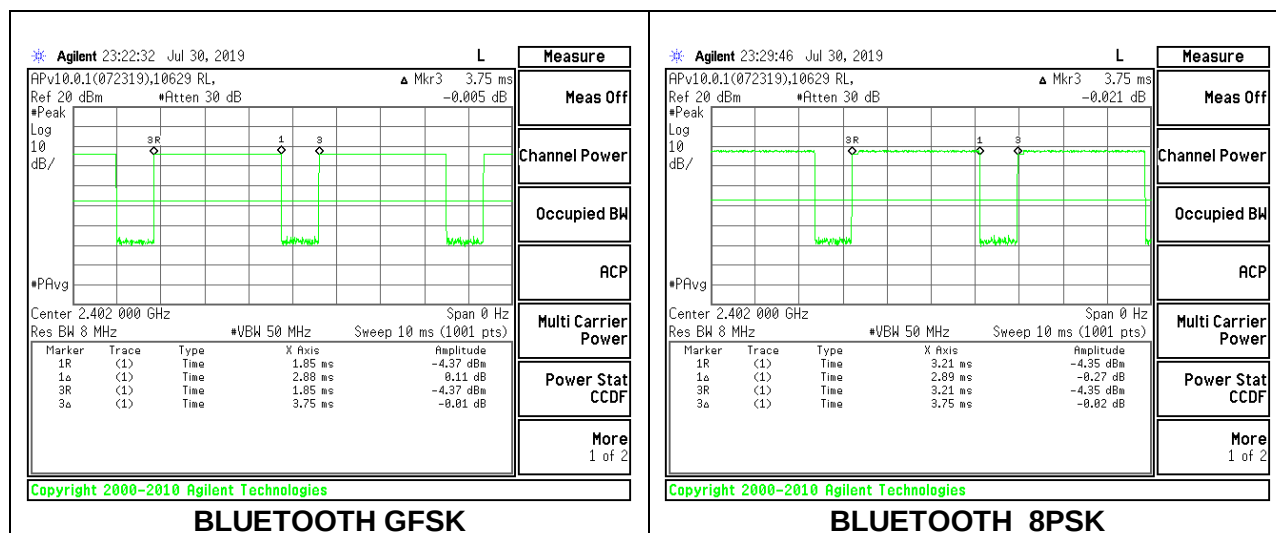

## **8.2. 20 dB AND 99% BANDWIDTH**

### **LIMITS**

None; for reporting purposes only.


### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer. The RBW is set to  $\geq 1\%$  of the 20 dB bandwidth. The VBW is set to  $\geq$  RBW. The sweep time is coupled.

### **RESULTS**



## 8.2.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

| Channel | Frequency (MHz) | 20dB Bandwidth (MHz) | 99% Bandwidth (MHz) |
|---------|-----------------|----------------------|---------------------|
| Low     | 2402            | 0.944                | 0.904               |
| Mid     | 2441            | 0.944                | 0.904               |
| High    | 2480            | 0.946                | 0.903               |

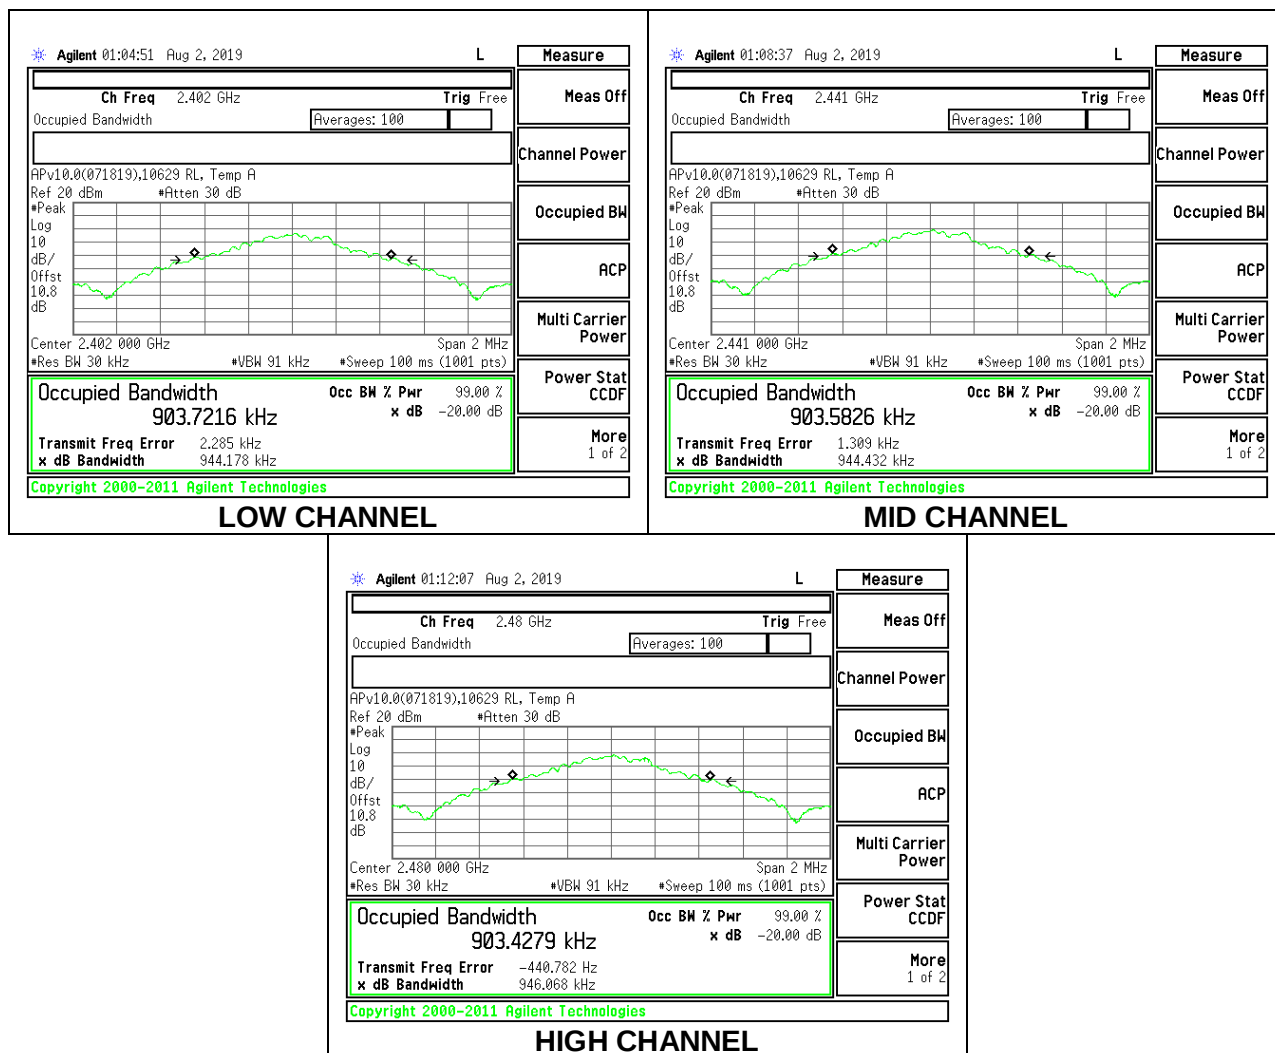

## 8.2.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

| Channel | Frequency (MHz) | 20dB Bandwidth (MHz) | 99% Bandwidth (MHz) |
|---------|-----------------|----------------------|---------------------|
| Low     | 2402            | 1.282                | 1.180               |
| Mid     | 2441            | 1.282                | 1.178               |
| High    | 2480            | 1.281                | 1.181               |

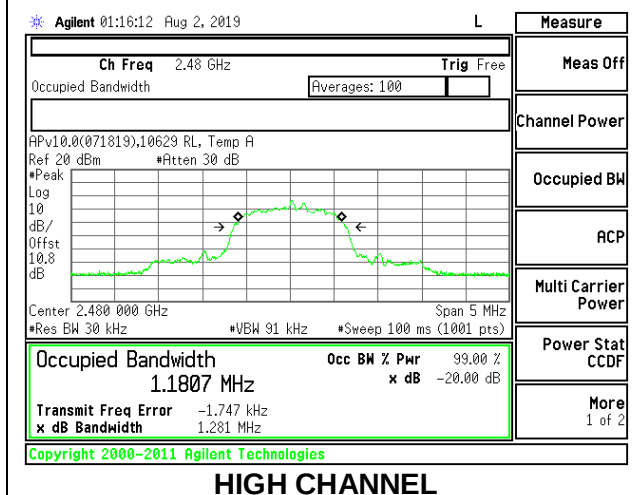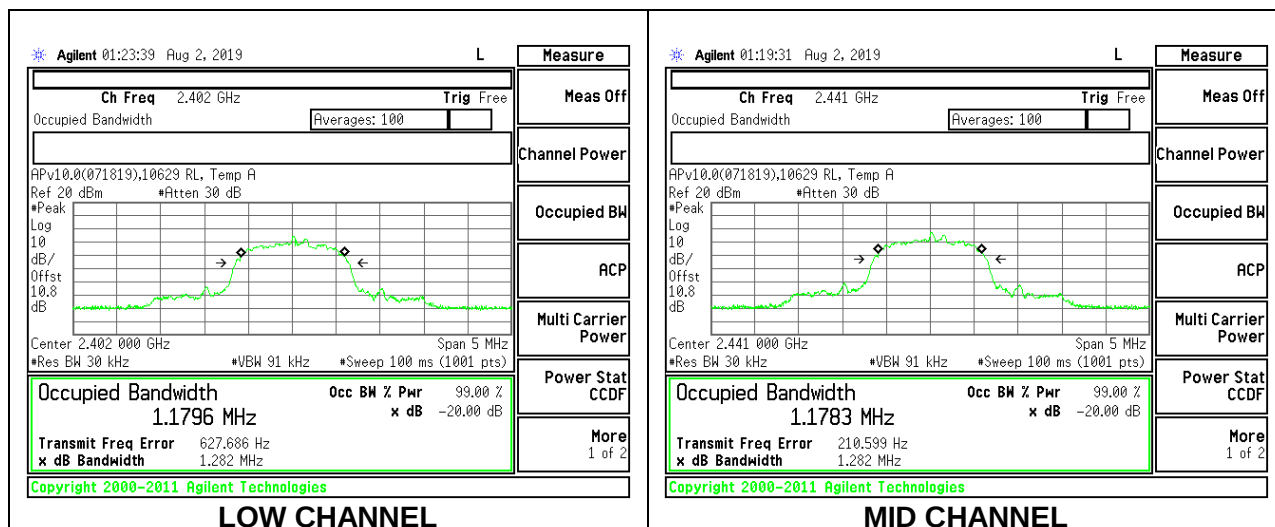

### **8.3. HOPPING FREQUENCY SEPARATION**

#### **LIMITS**

FCC §15.247 (a) (1)

RSS-247 (5.1) (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

#### **TEST PROCEDURE**


The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to  $VBW \geq RBW$ . The sweep time is coupled.

#### **RESULTS**

### 8.3.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

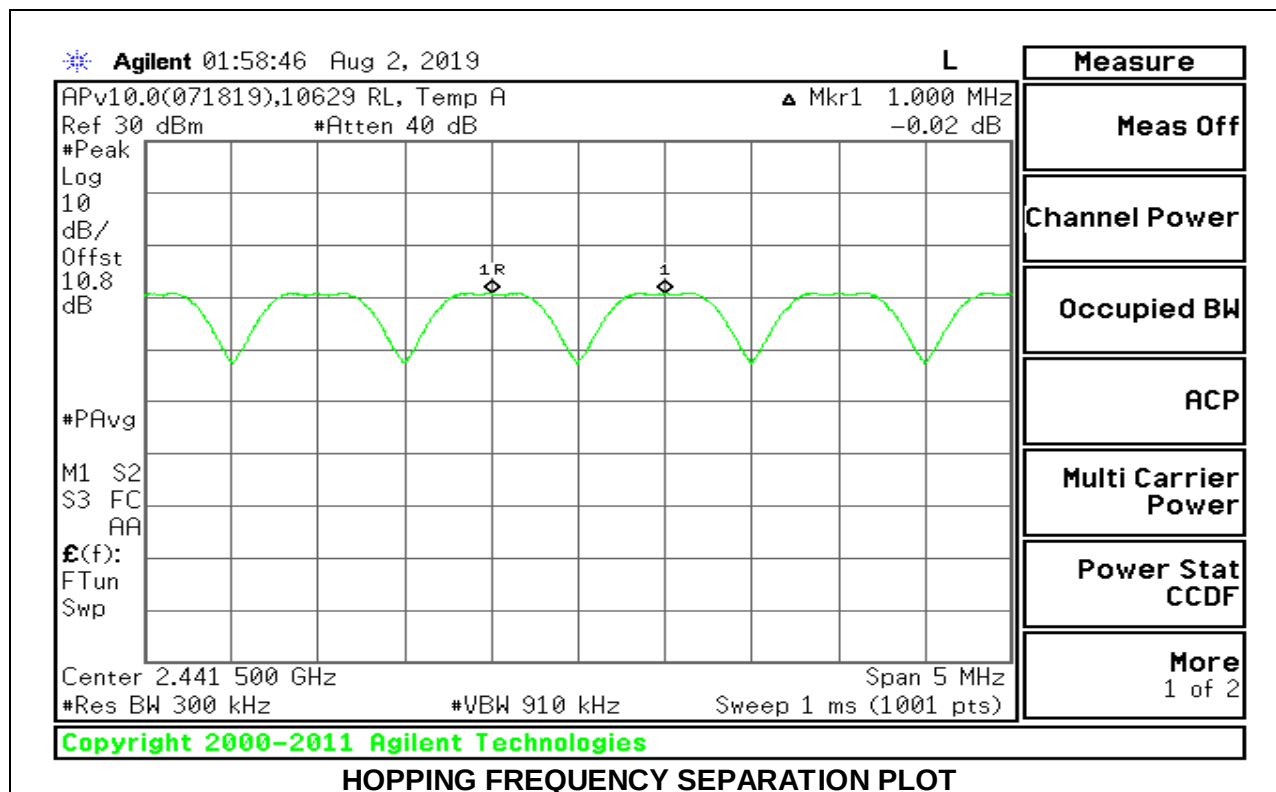

### 8.3.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

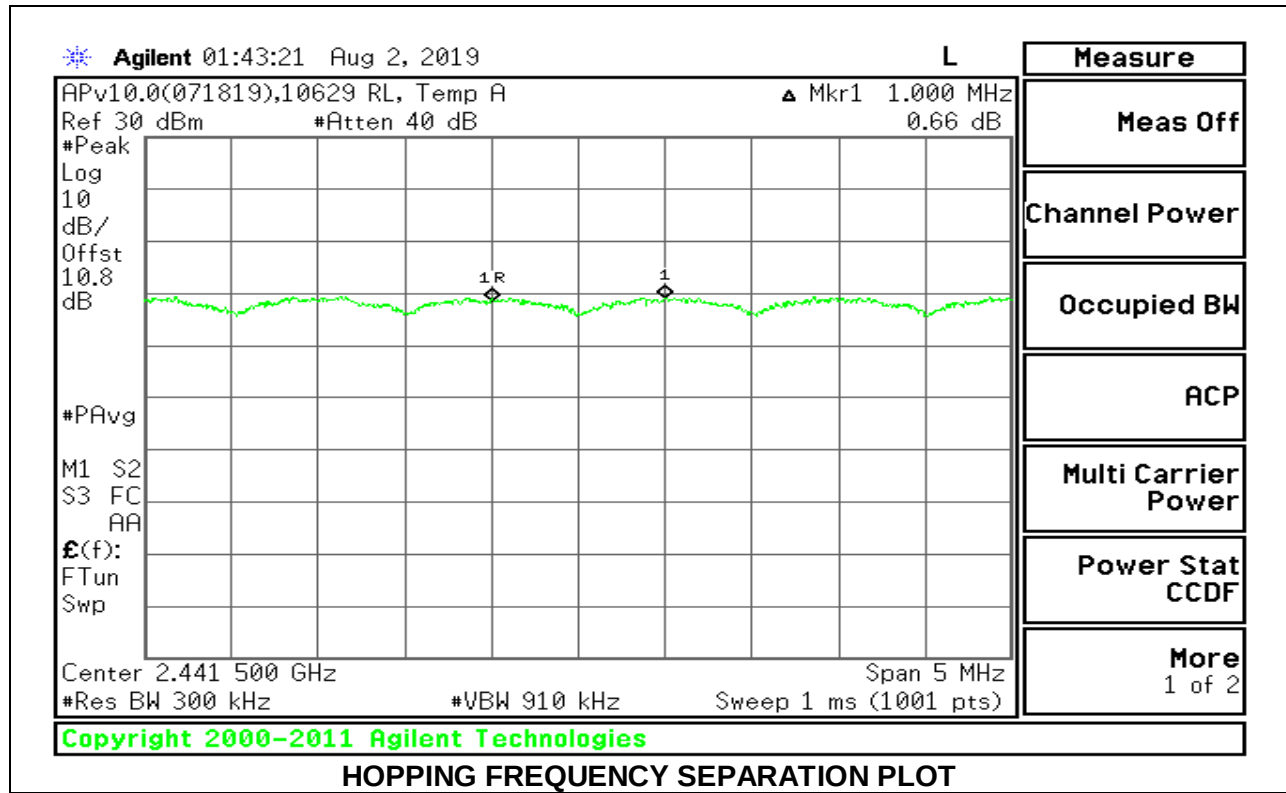

## **8.4. NUMBER OF HOPPING CHANNELS**

### **LIMITS**

FCC §15.247 (a) (1) (iii)

RSS-247 (5.1) (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.



### **TEST PROCEDURE**



The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

### **RESULTS**



Normal Mode: 79 Channels Observed



### 8.4.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

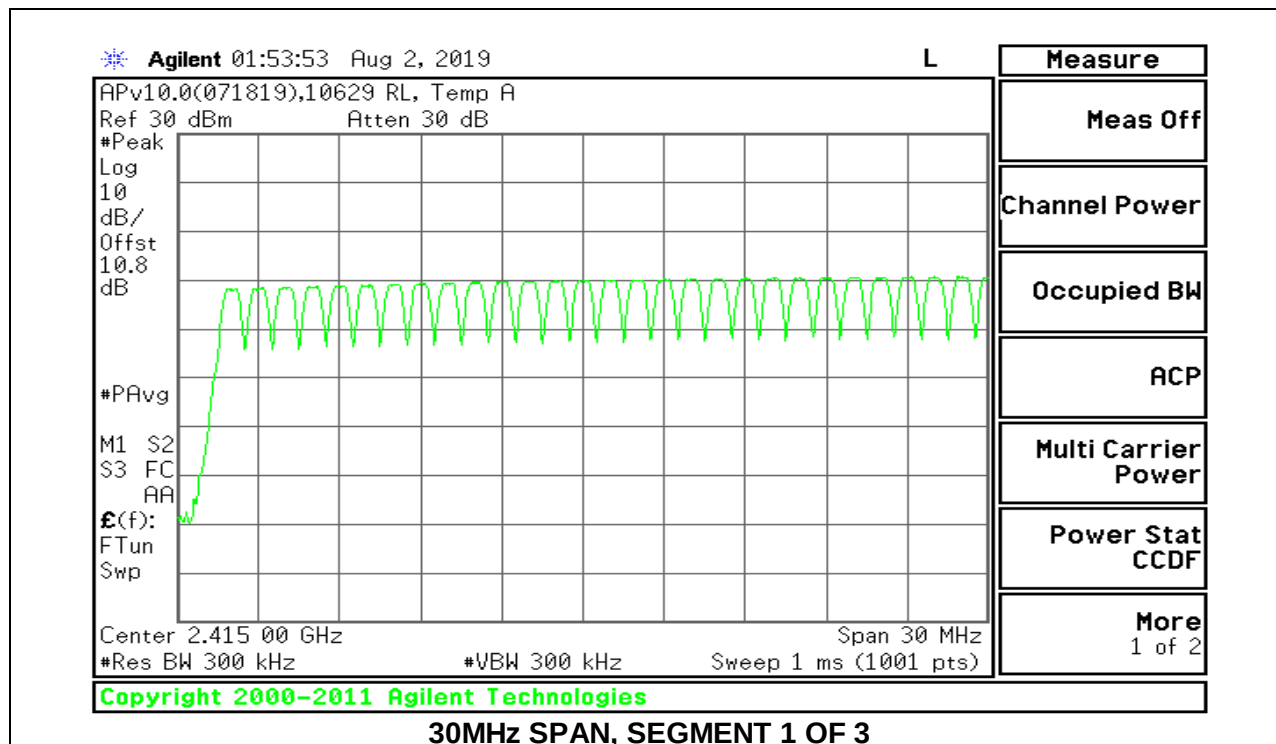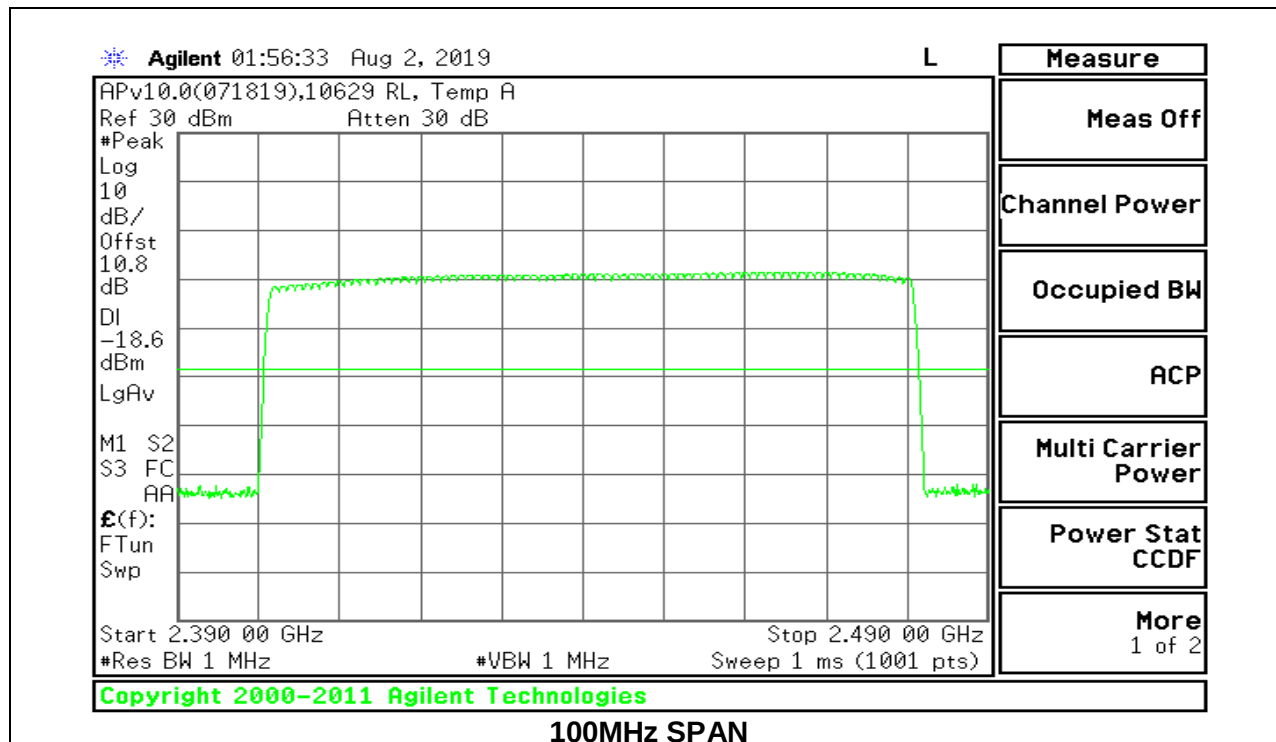

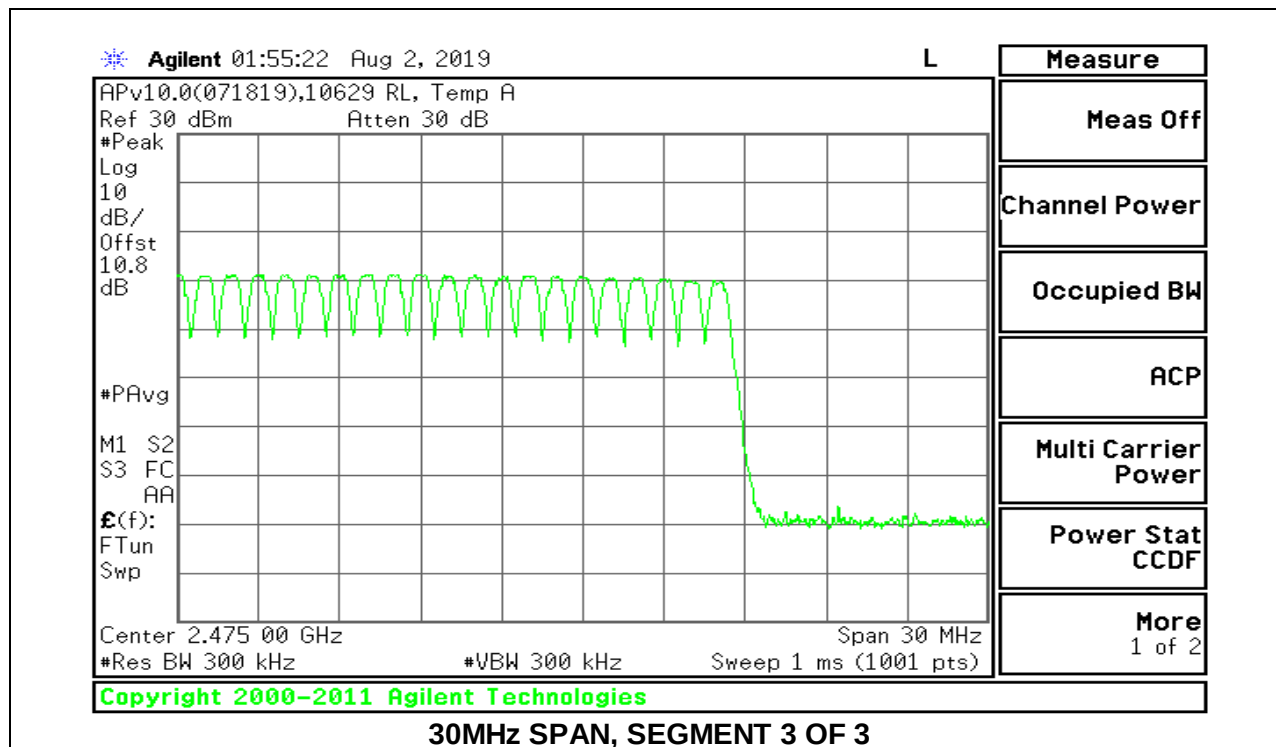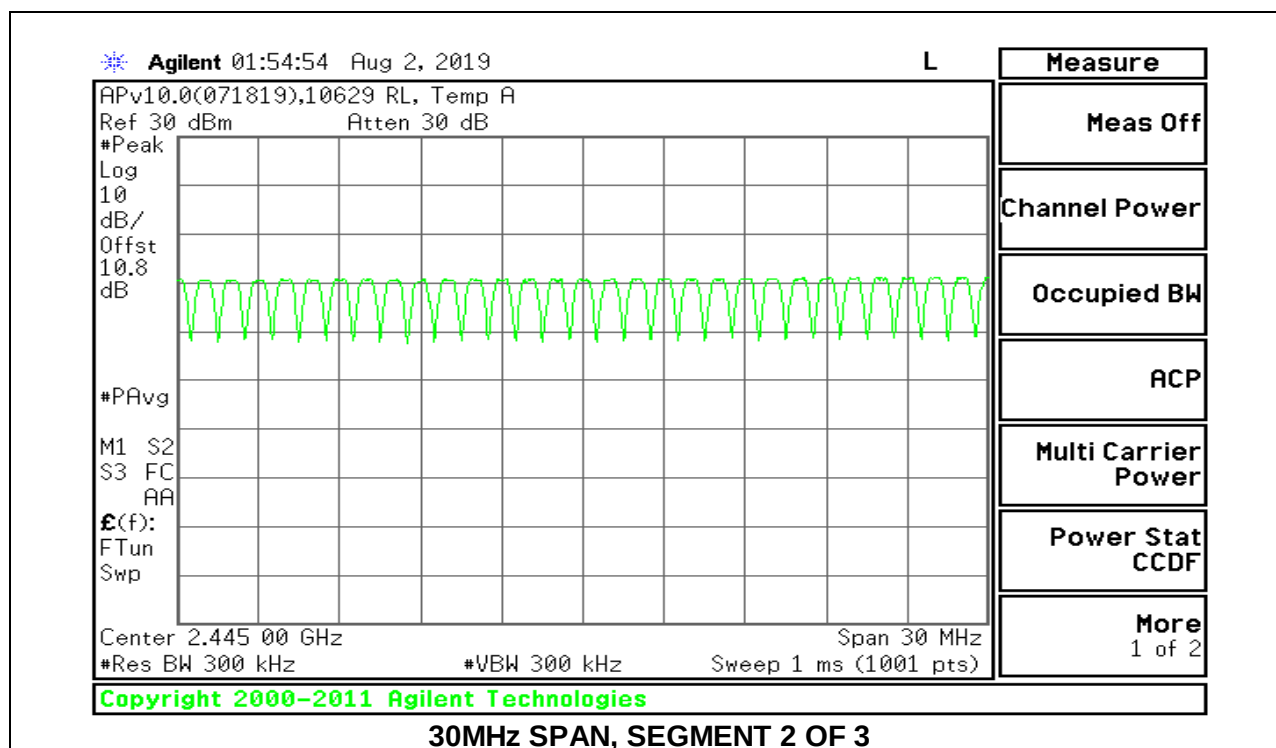

## 8.4.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

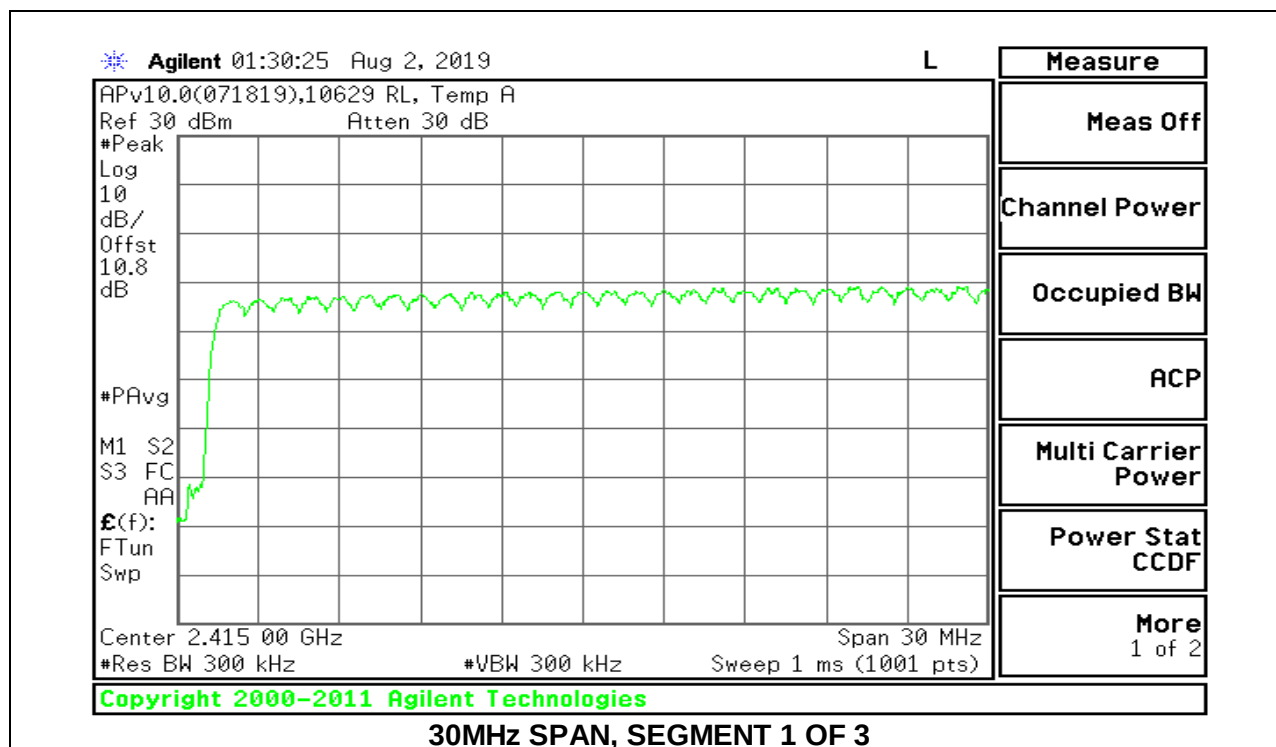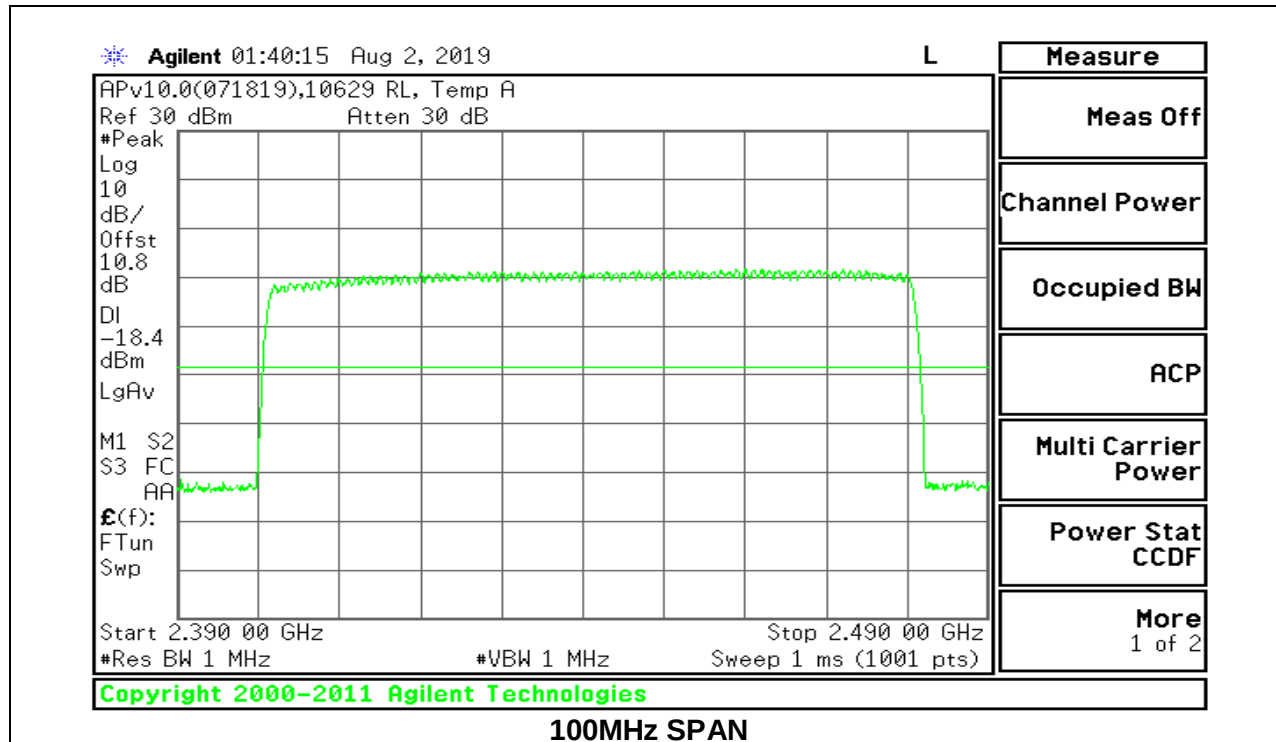

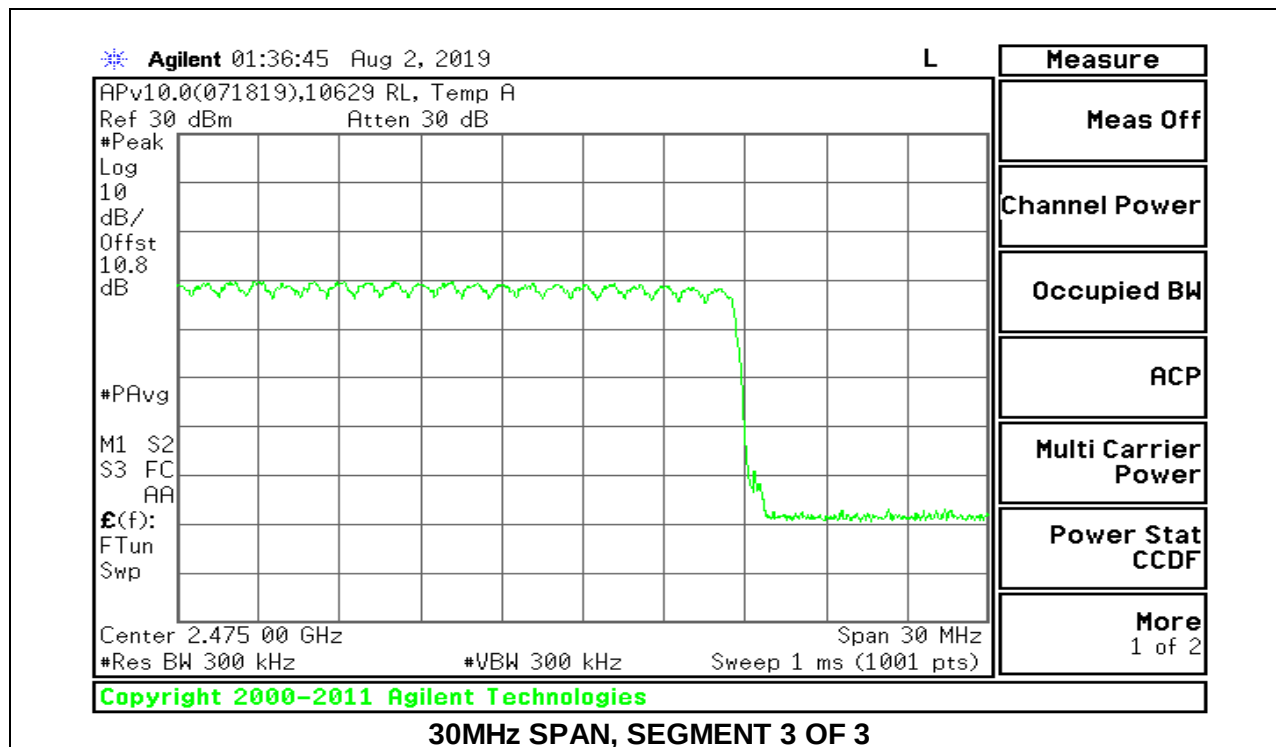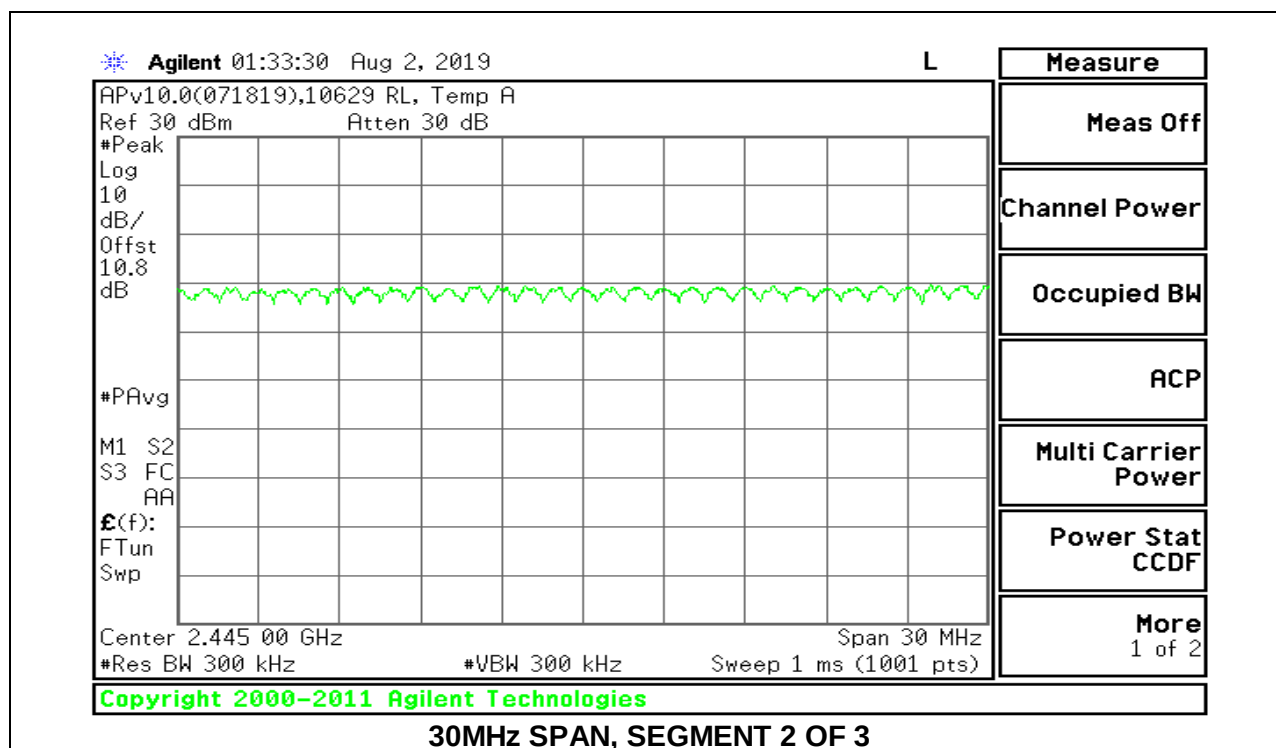

## **8.5. AVERAGE TIME OF OCCUPANCY**

### **LIMITS**

FCC §15.247 (a) (1) (iii)

RSS-247 (5.1) (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 3.16 second period (79 channels \* 0.4 s) is equal to  $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$ .

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels \* 0.4 seconds) is equal to  $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{pulse width}$ .

### **RESULTS**

### 8.5.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION


| DH Packet        | Pulse Width (msec) | Number of Pulses in 3.16 seconds | Average Time of Occupancy (sec) | Limit (sec) | Margin (sec) |
|------------------|--------------------|----------------------------------|---------------------------------|-------------|--------------|
| GFSK Normal Mode |                    |                                  |                                 |             |              |
| DH1              | 0.381              | 32                               | 0.1219                          | 0.4         | -0.2781      |
| DH3              | 1.636              | 15                               | 0.2454                          | 0.4         | -0.1546      |
| DH5              | 2.884              | 9                                | 0.2596                          | 0.4         | -0.1404      |
|                  |                    |                                  |                                 |             |              |
| DH Packet        | Pulse Width (sec)  | Number of Pulses in 0.8 seconds  | Average Time of Occupancy (sec) | Limit (sec) | Margin (sec) |
| GFSK AFH Mode    |                    |                                  |                                 |             |              |
| DH1              | 0.381              | 8                                | 0.03048                         | 0.4         | -0.3695      |
| DH3              | 1.636              | 3.75                             | 0.06135                         | 0.4         | -0.3387      |
| DH5              | 2.884              | 2.25                             | 0.06489                         | 0.4         | -0.3351      |



## 8.5.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

| DH Packet        | Pulse Width (msec) | Number of Pulses in 3.16 seconds | Average Time of Occupancy (sec) | Limit (sec) | Margin (sec) |
|------------------|--------------------|----------------------------------|---------------------------------|-------------|--------------|
| 8PSK Normal Mode |                    |                                  |                                 |             |              |
| 3DH1             | 0.386              | 31                               | 0.11966                         | 0.4         | -0.28034     |
| 3DH3             | 1.145              | 14                               | 0.1603                          | 0.4         | -0.2397      |
| 3DH5             | 2.888              | 7                                | 0.20216                         | 0.4         | -0.19784     |

Note: for AFH (8PSK) mode, please refer to the results of AFH (GFSK) mode; the channel selection and hopping rate are the same for both EDR and Basic Rate operation, data for Basic Rate demonstrates compliance with channel occupancy when AFH is employed.

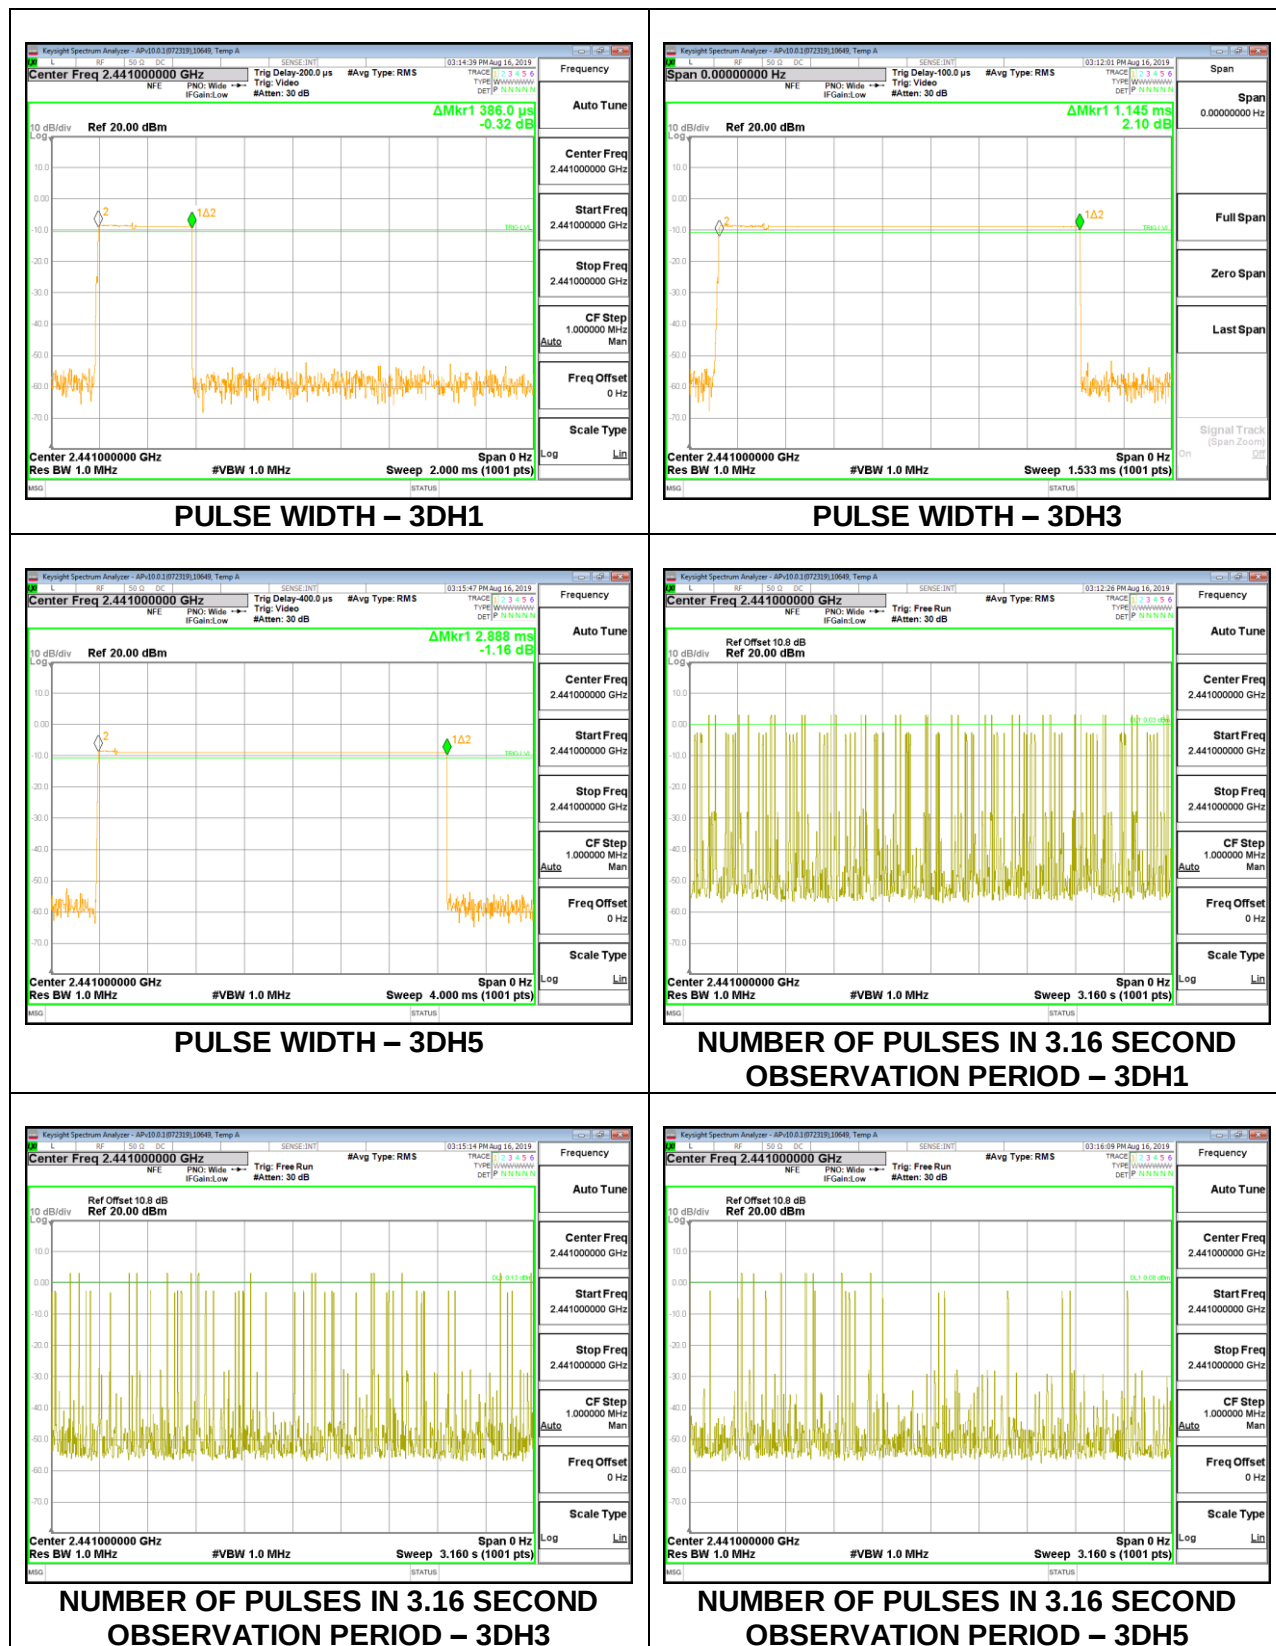

## **8.6. OUTPUT POWER**

### **LIMITS**

§15.247 (b) (1)

RSS-247 (5.4) (b)

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts

### **TEST PROCEDURE**

Measurements perform using a wideband gated RF power meter.

The cable assembly insertion loss of was entered as an offset in the power meter to allow for a peak reading of power.

### **RESULTS**

### 8.6.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

|            |          |
|------------|----------|
| Tested By: | 10629 RL |
| Date:      | 8/2/2019 |

| Channel | Frequency<br>(MHz) | Output Power<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|---------|--------------------|-----------------------|----------------|----------------|
| Low     | 2402               | 1.37                  | 21             | -19.63         |
| Middle  | 2441               | 3.70                  | 21             | -17.3          |
| High    | 2480               | 2.57                  | 21             | -18.43         |

### 8.6.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

|            |          |
|------------|----------|
| Tested By: | 10629 RL |
| Date:      | 8/2/2019 |

| Channel | Frequency<br>(MHz) | Output Power<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|---------|--------------------|-----------------------|----------------|----------------|
| Low     | 2402               | 3.51                  | 21             | -17.49         |
| Middle  | 2441               | 5.80                  | 21             | -15.2          |
| High    | 2480               | 4.60                  | 21             | -16.4          |

### 8.6.3. BLUETOOTH ENHANCED DATA RATE DQPSK MODULATION

|            |          |
|------------|----------|
| Tested By: | 10629 RL |
| Date:      | 8/2/2019 |

| Channel | Frequency<br>(MHz) | Output Power<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|---------|--------------------|-----------------------|----------------|----------------|
| Low     | 2402               | 3.11                  | 21             | -17.89         |
| Middle  | 2441               | 5.42                  | 21             | -15.58         |
| High    | 2480               | 4.27                  | 21             | -16.73         |

## **8.7. AVERAGE POWER**

### **LIMITS**

None; for reporting purposes only

### **TEST PROCEDURE**

Measurements perform using a wideband gated RF power meter.

The cable assembly insertion loss of was entered as an offset in the power meter to allow for a gated average reading of power.

### **RESULTS**

### 8.7.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

|            |          |
|------------|----------|
| Tested By: | 10629 RL |
| Date       | 8/2/2019 |

| Channel | Frequency<br>(MHz) | Average Power<br>(dBm) |
|---------|--------------------|------------------------|
| Low     | 2402               | 0.93                   |
| Middle  | 2441               | 3.36                   |
| High    | 2480               | 2.23                   |

### 8.7.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

|            |          |
|------------|----------|
| Tested By: | 10629 RL |
| Date       | 8/2/2019 |

| Channel | Frequency<br>(MHz) | Average Power<br>(dBm) |
|---------|--------------------|------------------------|
| Low     | 2402               | 0.44                   |
| Middle  | 2441               | 2.90                   |
| High    | 2480               | 1.77                   |

### 8.7.3. BLUETOOTH ENHANCED DATA RATE DQPSK MODULATION

|            |          |
|------------|----------|
| Tested By: | 10629 RL |
| Date       | 8/2/2019 |

| Channel | Frequency<br>(MHz) | Average Power<br>(dBm) |
|---------|--------------------|------------------------|
| Low     | 2402               | 0.44                   |
| Middle  | 2441               | 2.90                   |
| High    | 2480               | 1.73                   |

## **8.8. CONDUCTED SPURIOUS EMISSIONS**

### **LIMITS**

FCC §15.247 (d)

RSS-247 5.5

Limit = -20 dBc

### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.


### **RESULTS**

## 8.8.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

### Antenna 1 SPURIOUS EMISSIONS, NON-HOPPING

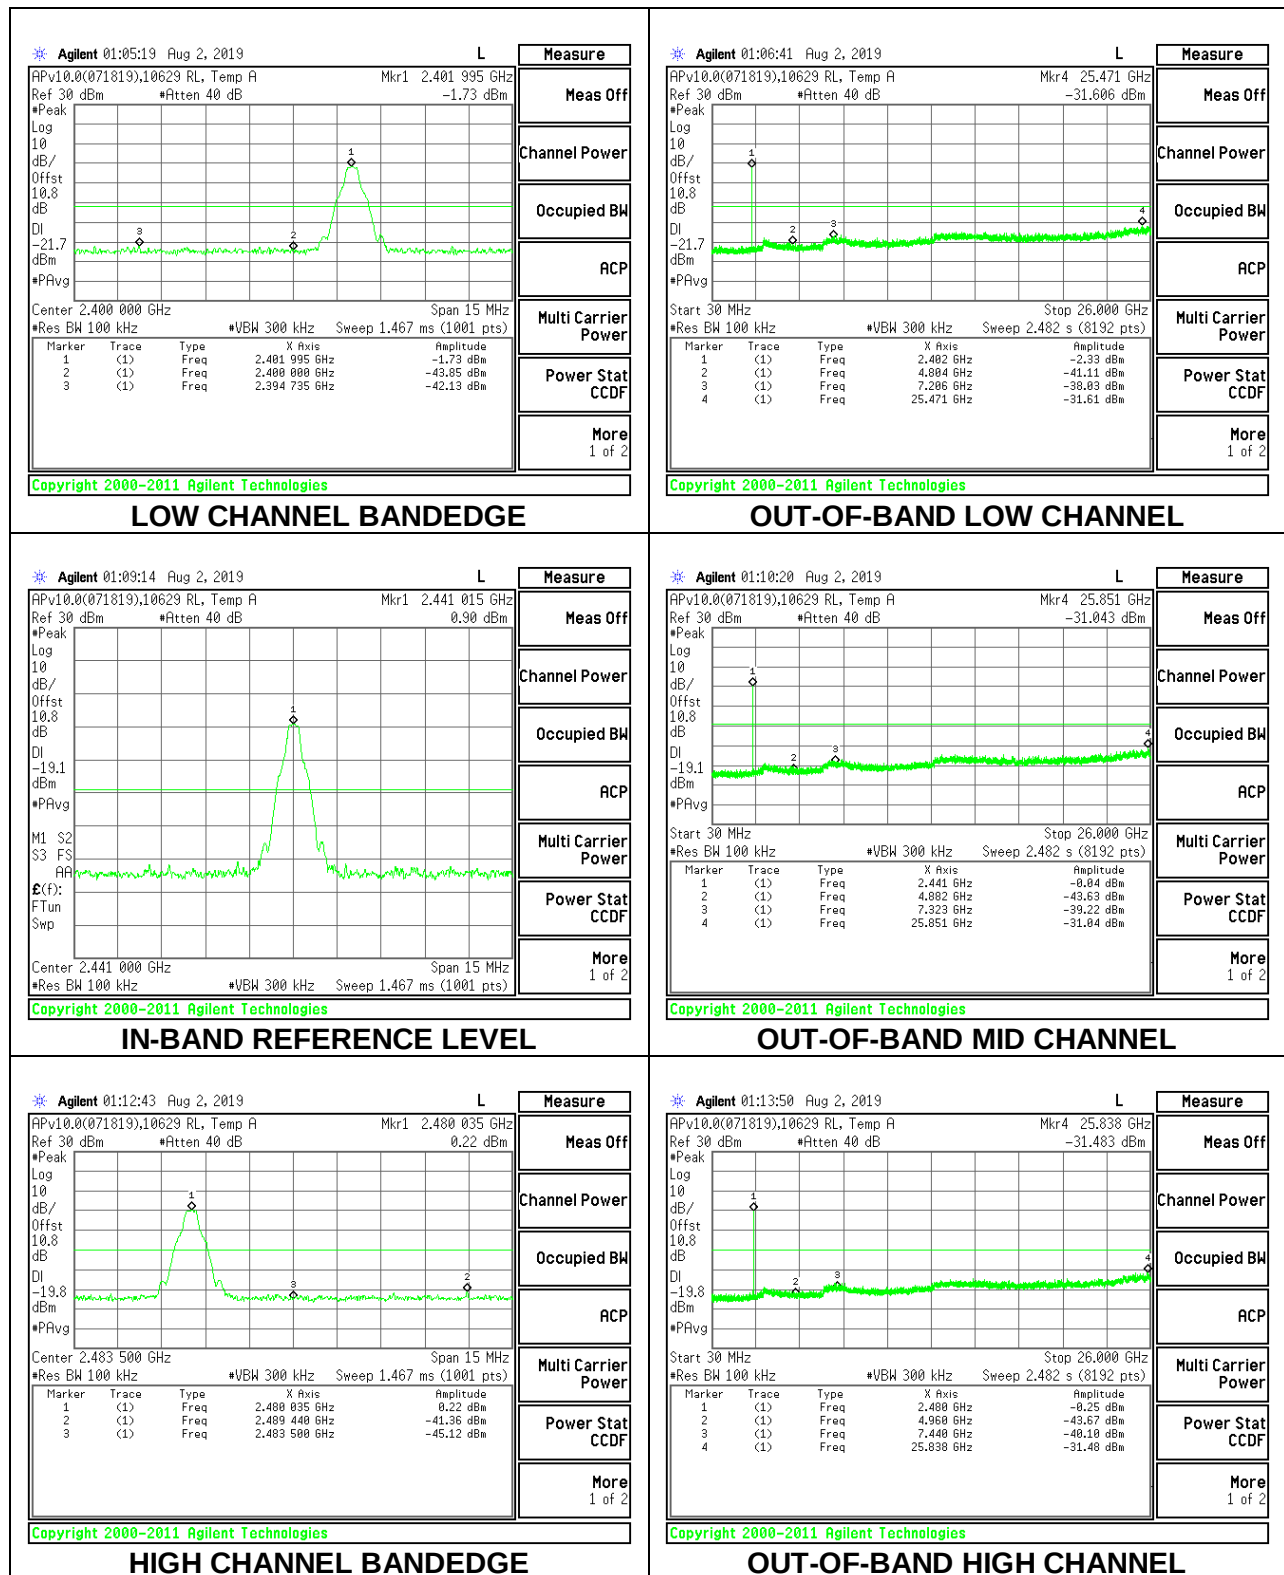


# **Antenna 1 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON**

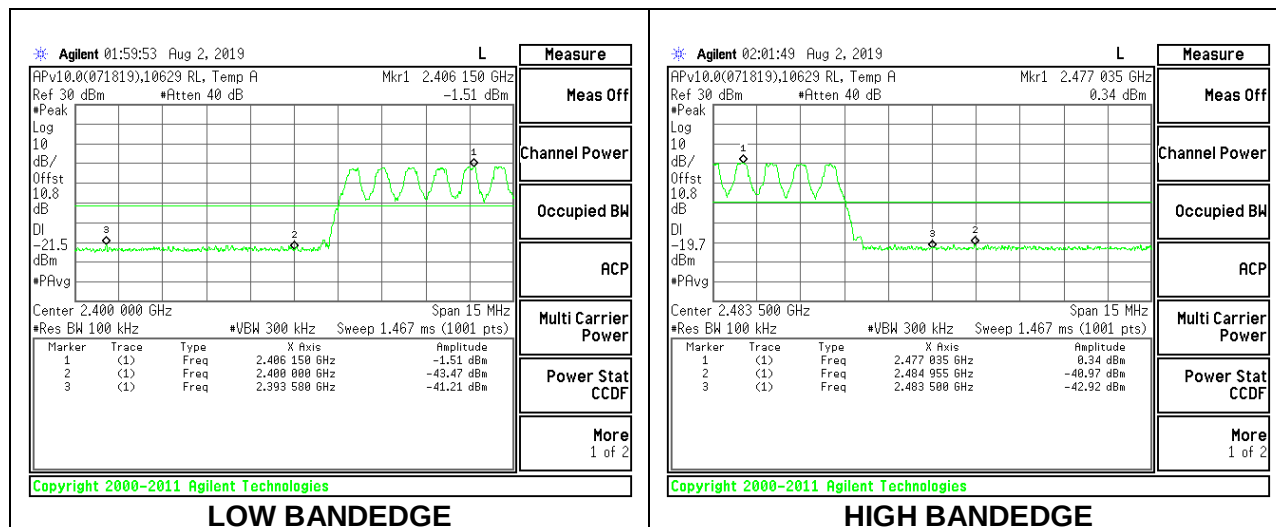


## 8.8.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

### Antenna 1 SPURIOUS EMISSIONS, NON-HOPPING

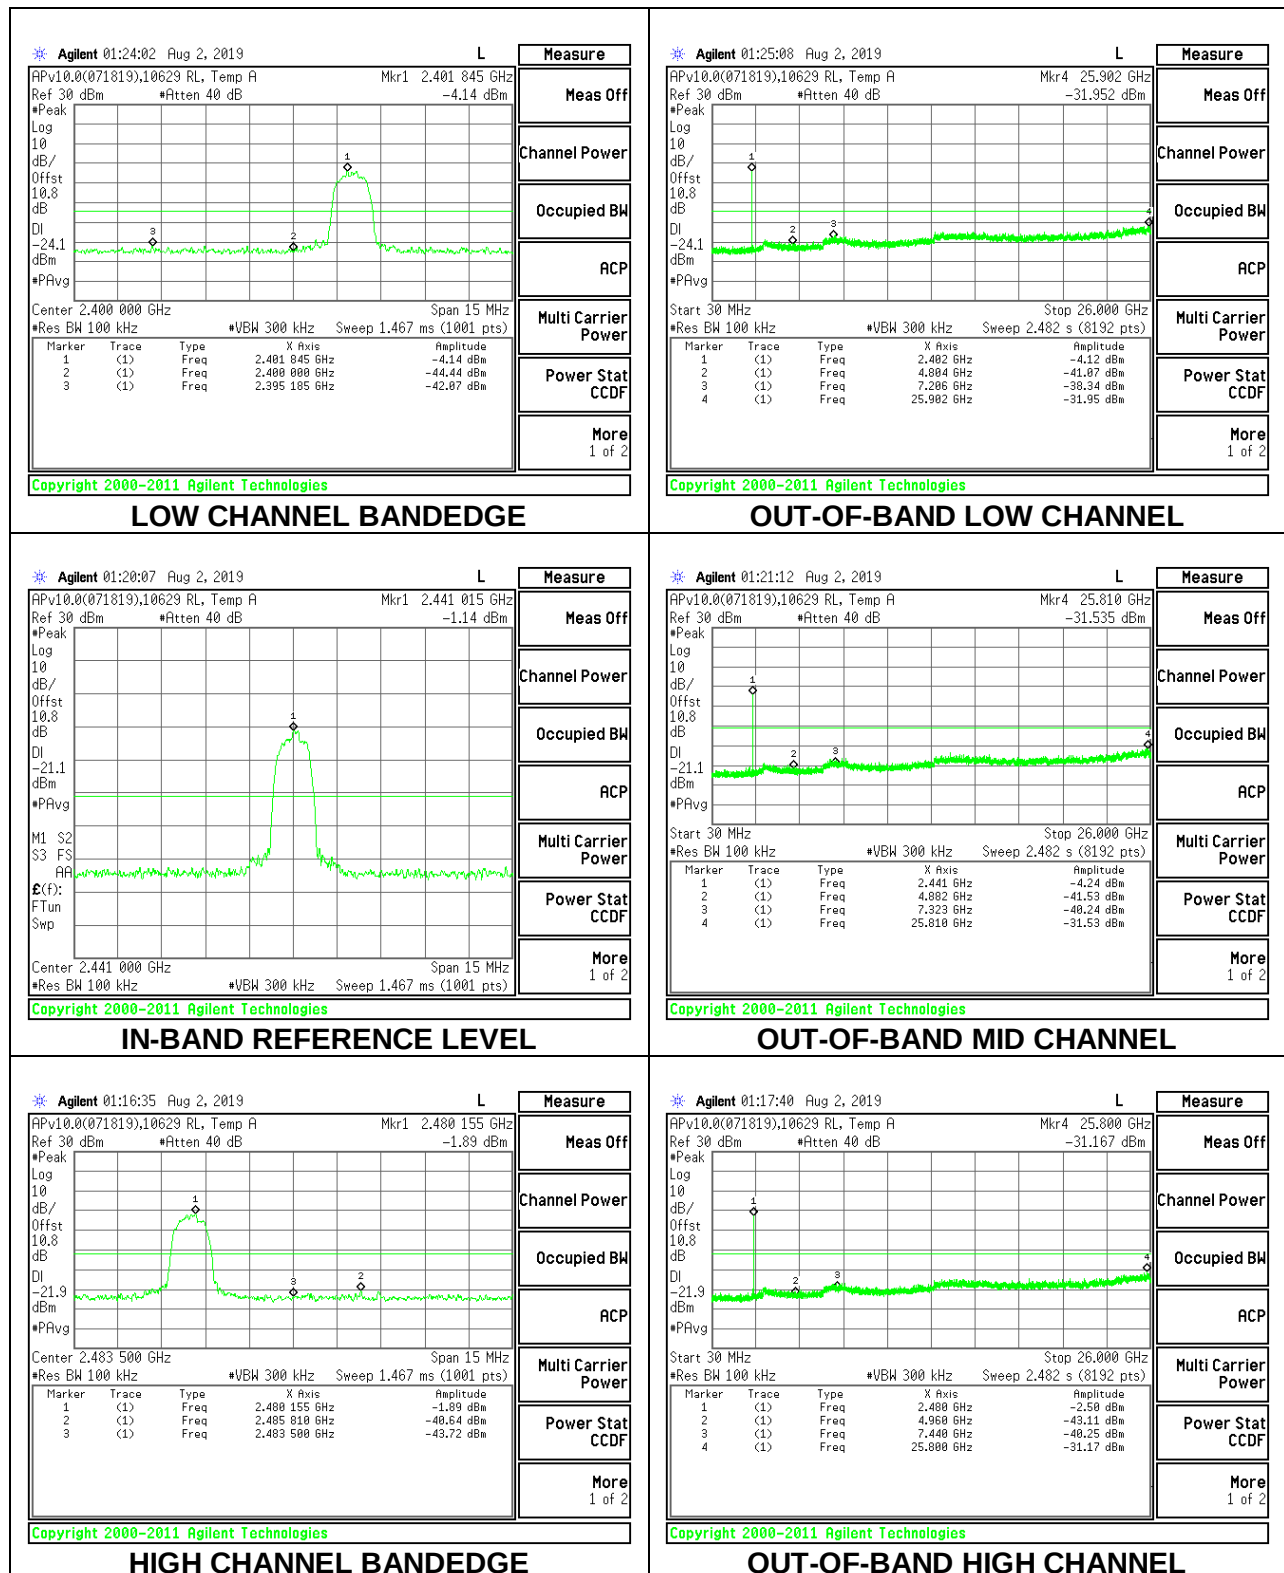

# **Antenna 1 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON**

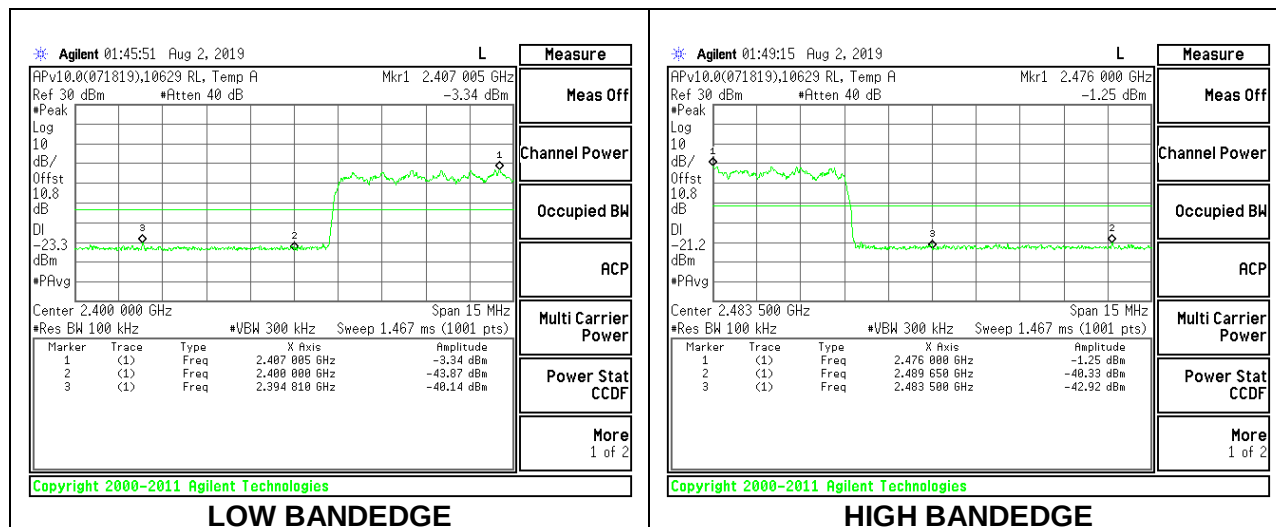

## 9. RADIATED TEST RESULTS

### LIMITS

FCC §15.205 and §15.209

RSS-GEN, Section 8.9 and 8.10.

| Frequency Range (MHz) | Field Strength Limit (uV/m) at 3 m | Field Strength Limit (dBuV/m) at 3 m |
|-----------------------|------------------------------------|--------------------------------------|
| 0.009-0.490           | 2400/F(kHz) @ 300 m                | -                                    |
| 0.490-1.705           | 24000/F(kHz) @ 30 m                | -                                    |
| 1.705 - 30            | 30 @ 30m                           | -                                    |
| 30 - 88               | 100                                | 40                                   |
| 88 - 216              | 150                                | 43.5                                 |
| 216 - 960             | 200                                | 46                                   |
| Above 960             | 500                                | 54                                   |

### TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For pre-scans above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 KHz for peak measurements.

For final measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements.

The spectrum from 1 GHz to 18 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band. Below 30MHz, 1GHz and above 18GHz emissions, the channel with the highest output power was tested.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

2D antenna use - For below 30MHz testing, investigation was done on three antenna orientations (parallel, perpendicular, and ground-parallel), parallel and perpendicular are the worst orientations, therefore testing was performed on these two orientations only.

**KDB 414788 Open Field Site(OFS) and Chamber Correlation Justification**

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

**KDB 558074 D01 15.247 Meas Guidance v05r02**


Use of a duty cycle correction factor (DCCF) is permitted for calculating average radiated field strength emission levels for an FHSS device in 15.247. This DCCF can be applied when the field strength limit (e.g., within a Government Restricted band) and the conditions specified in Section 15.35(c) can be satisfied. The average radiated field strength is calculated by subtracting the DCCF from the maximum radiated field strength level as determined through measurement. The maximum radiated field strength level represents the worst-case (maximum amplitude) RMS measurement of the emission(s) during continuous transmission (i.e., not including any time intervals during which the transmitter is off or is transmitting at a reduced power level). It is also acceptable to apply the DCCF to a measurement performed with a peak detector instead of the specified RMS power averaging detector. Note that Section 15.35(c) specifies that the DCCF shall represent the worst-case (greatest duty cycle) over any 100 msec transmission period.

## 9.1. TRANSMITTER ABOVE 1 GHz

### 9.1.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

#### BANDEDGE (LOW CHANNEL)

#### HORIZONTAL RESULT

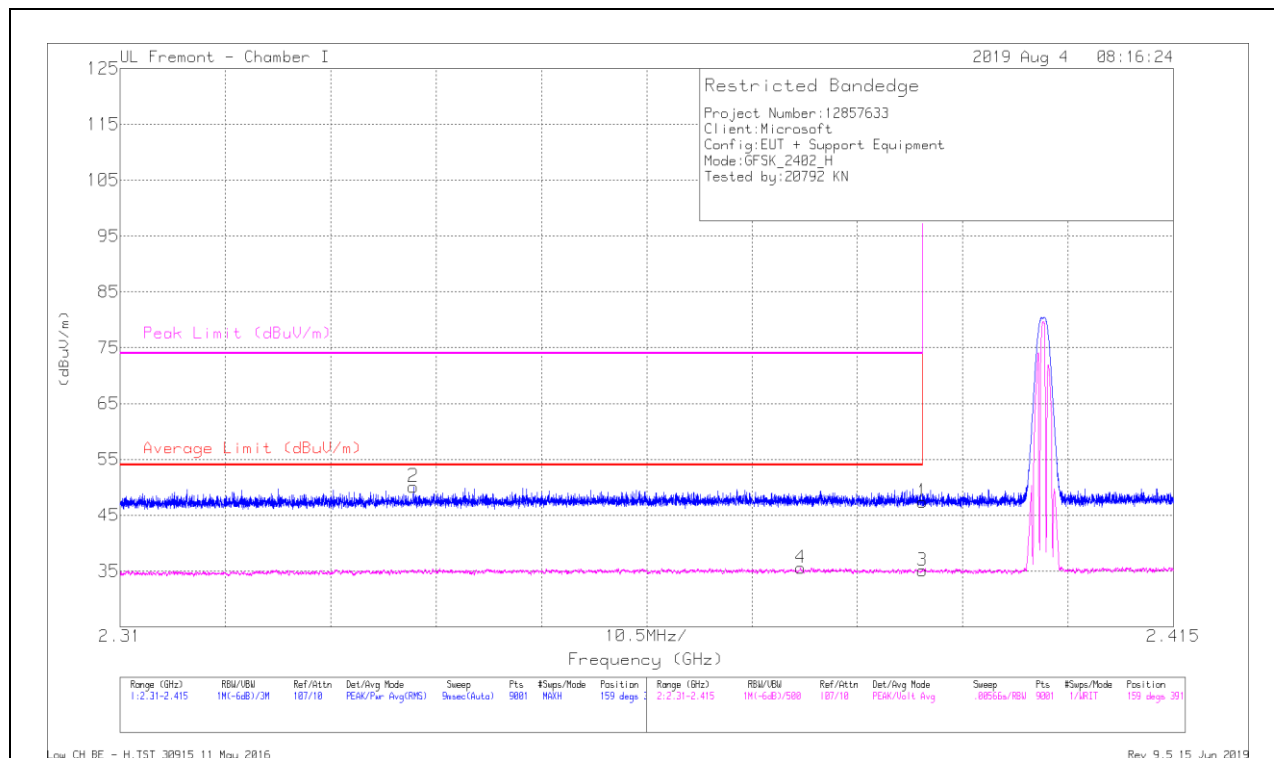


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T862 (dBm) | Amp/Cbl/Fit r/Pad (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|---------------|------------------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | 2.38999         | 37.1                 | Pk   | 31.9          | -21.6                  | 47.4                       | -                      | -           | 74                  | -26.6          | 159            | 391         | H        |
| 2      | 2.33923         | 39.99                | Pk   | 31.6          | -21.5                  | 50.09                      | -                      | -           | 74                  | -23.91         | 159            | 391         | H        |
| 3      | 2.38999         | 24.77                | VA1T | 31.9          | -21.6                  | 35.07                      | 54                     | -18.93      | -                   | -              | 159            | 391         | H        |
| 4      | 2.37783         | 25.17                | VA1T | 31.9          | -21.5                  | 35.57                      | 54                     | -18.43      | -                   | -              | 159            | 391         | H        |

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average  $V_B = 1/T_{on}$  where:  $T_{on}$  is transmit duration

## VERTICAL RESULT

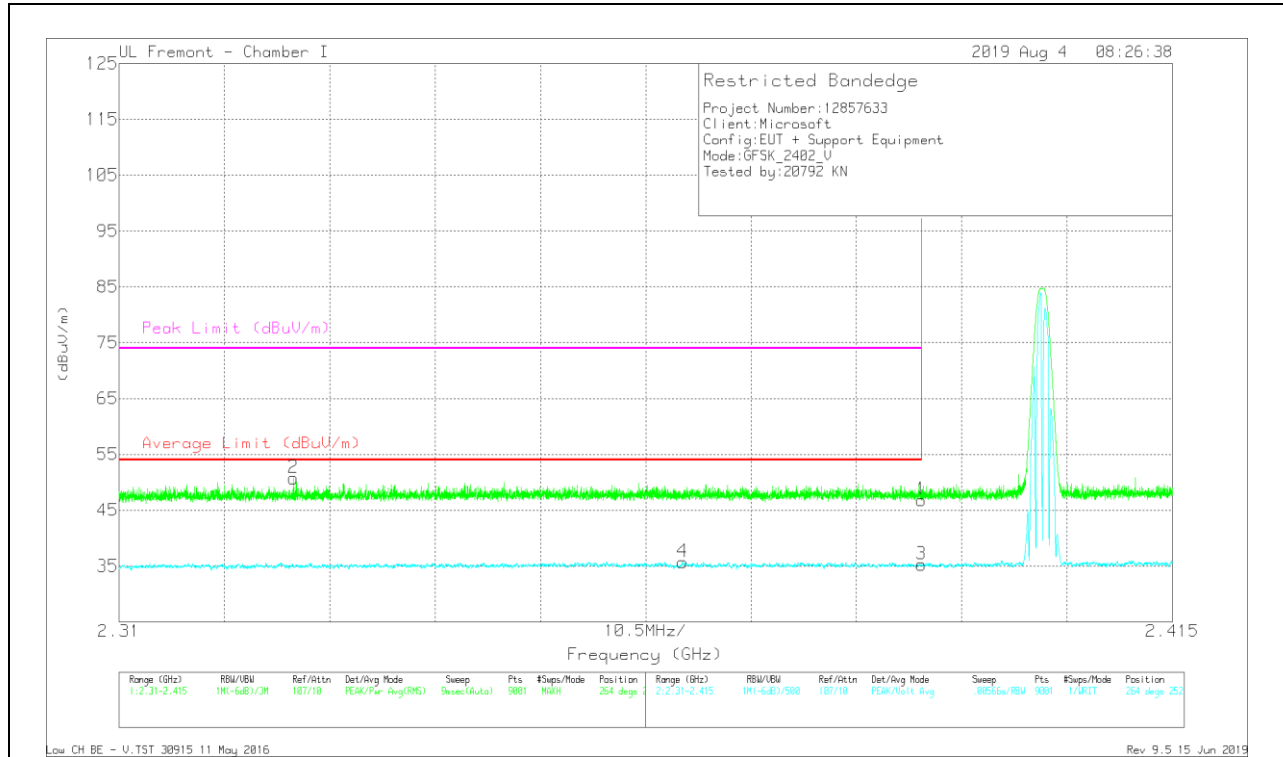


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T862 (dBm) | Amp/Cbl/Fit r/Pad (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|---------------|------------------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | 2.38999         | 36.55                | Pk   | 31.9          | -21.6                  | 46.85                      | -                      | -           | 74                  | -27.15         | 264            | 252         | V        |
| 2      | 2.32738         | 40.77                | Pk   | 31.5          | -21.5                  | 50.77                      | -                      | -           | 74                  | -23.23         | 264            | 252         | V        |
| 3      | 2.38999         | 24.98                | VA1T | 31.9          | -21.6                  | 35.28                      | 54                     | -18.72      | -                   | -              | 264            | 252         | V        |
| 4      | 2.36618         | 25.45                | VA1T | 31.8          | -21.5                  | 35.75                      | 54                     | -18.25      | -                   | -              | 264            | 252         | V        |

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average  $V_B=1/T_{on}$  where:  $T_{on}$  is transmit duration

## BANDEDGE (HIGH CHANNEL)

### HORIZONTAL RESULT

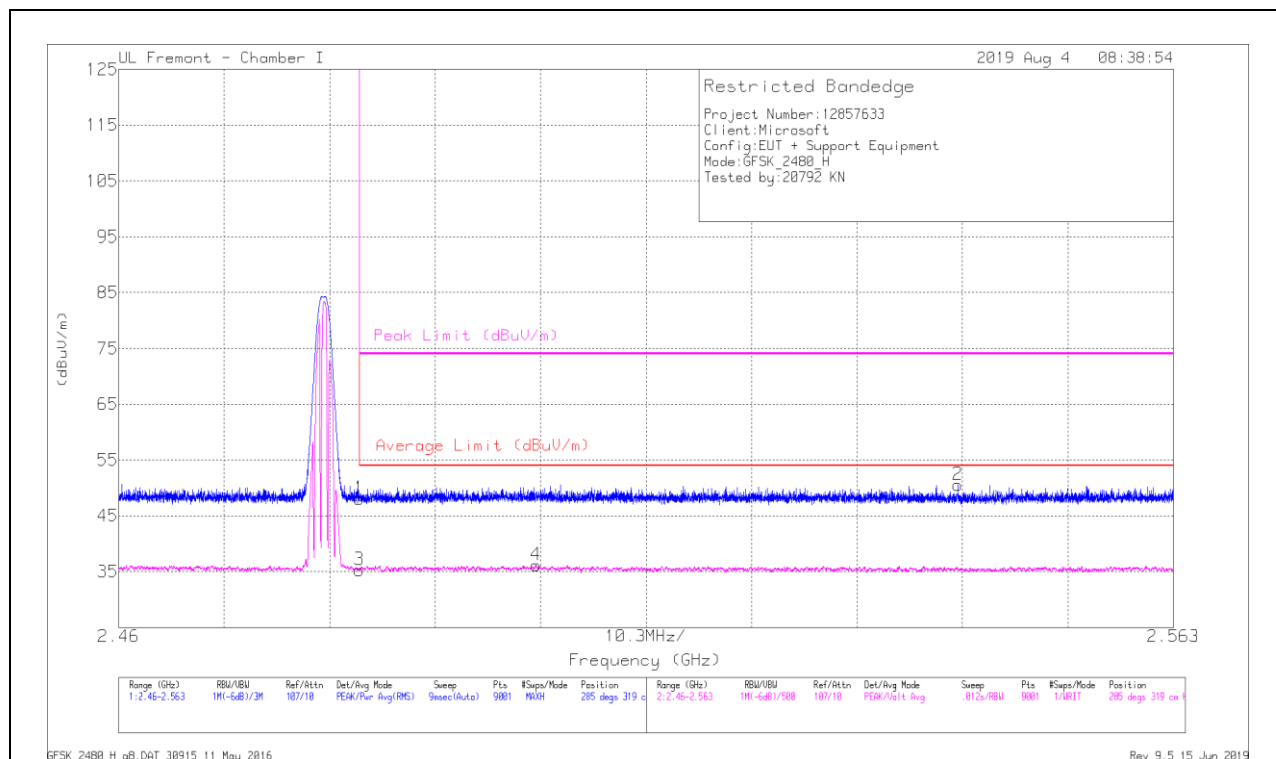


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T862 (dBm) | Amp/Cbl/Fit r/Pad (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|---------------|------------------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | 2.48351         | 37.36                | Pk   | 32.4          | -21.7                  | 48.06                      | -                      | -           | 74                  | -25.94         | 285            | 319         | H        |
| 2      | 2.54196         | 40.15                | Pk   | 32.2          | -21.8                  | 50.55                      | -                      | -           | 74                  | -23.45         | 285            | 319         | H        |
| 3      | 2.48351         | 24.55                | VA1T | 32.4          | -21.7                  | 35.25                      | 54                     | -18.75      | -                   | -              | 285            | 319         | H        |
| 4      | 2.50073         | 25.54                | VA1T | 32.3          | -21.7                  | 36.14                      | 54                     | -17.86      | -                   | -              | 285            | 319         | H        |

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average  $V_B = 1/T_{on}$  where:  $T_{on}$  is transmit duration

## VERTICAL RESULT

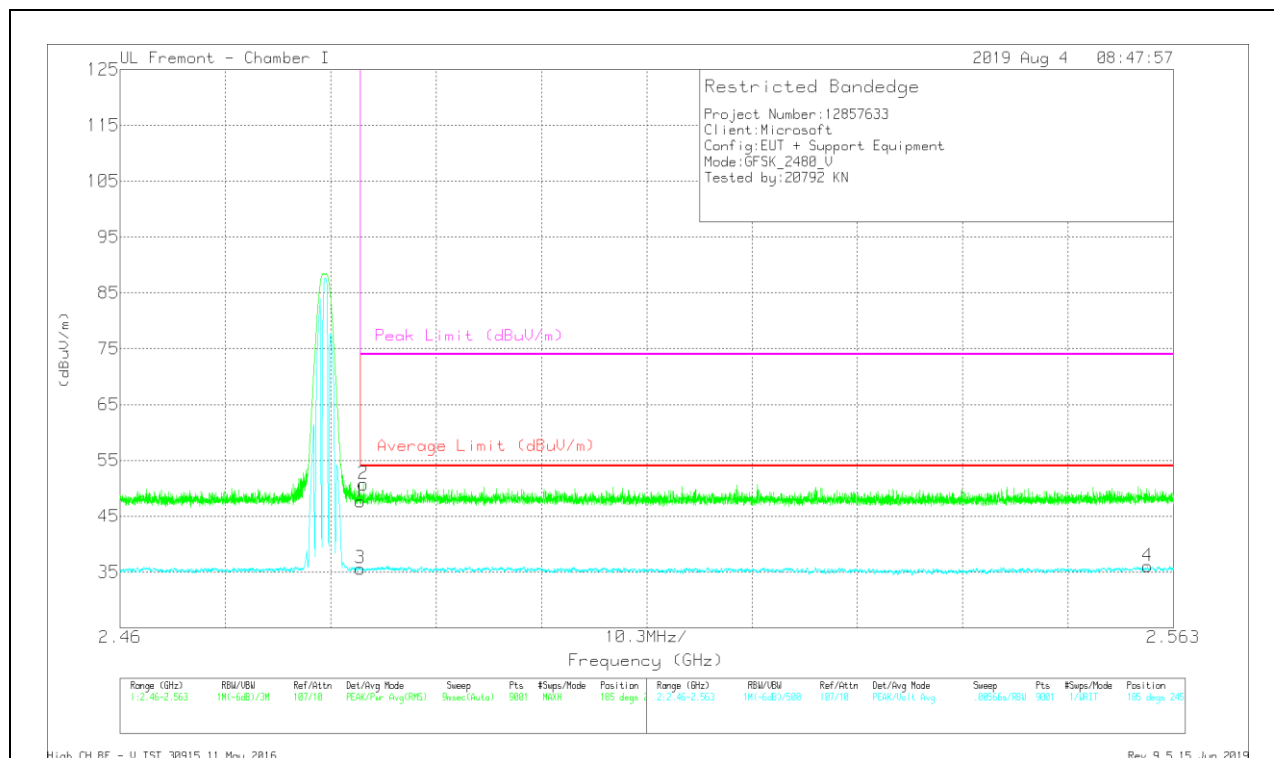



| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T862 (dBm) | Amp/Cbl/Fit r/Pad (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|---------------|------------------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | 2.48351         | 36.94                | Pk   | 32.4          | -21.7                  | 47.64                      | -                      | -           | 74                  | -26.36         | 185            | 245         | V        |
| 2      | 2.48379         | 40.06                | Pk   | 32.4          | -21.7                  | 50.76                      | -                      | -           | 74                  | -23.24         | 185            | 245         | V        |
| 3      | 2.48351         | 24.93                | VA1T | 32.4          | -21.7                  | 35.63                      | 54                     | -18.37      | -                   | -              | 185            | 245         | V        |
| 4      | 2.56047         | 25.37                | VA1T | 32.3          | -21.6                  | 36.07                      | 54                     | -17.93      | -                   | -              | 185            | 245         | V        |

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average  $V_B = 1/T_{on}$  where:  $T_{on}$  is transmit duration

## HARMONICS AND SPURIOUS EMISSIONS

### LOW CHANNEL RESULTS

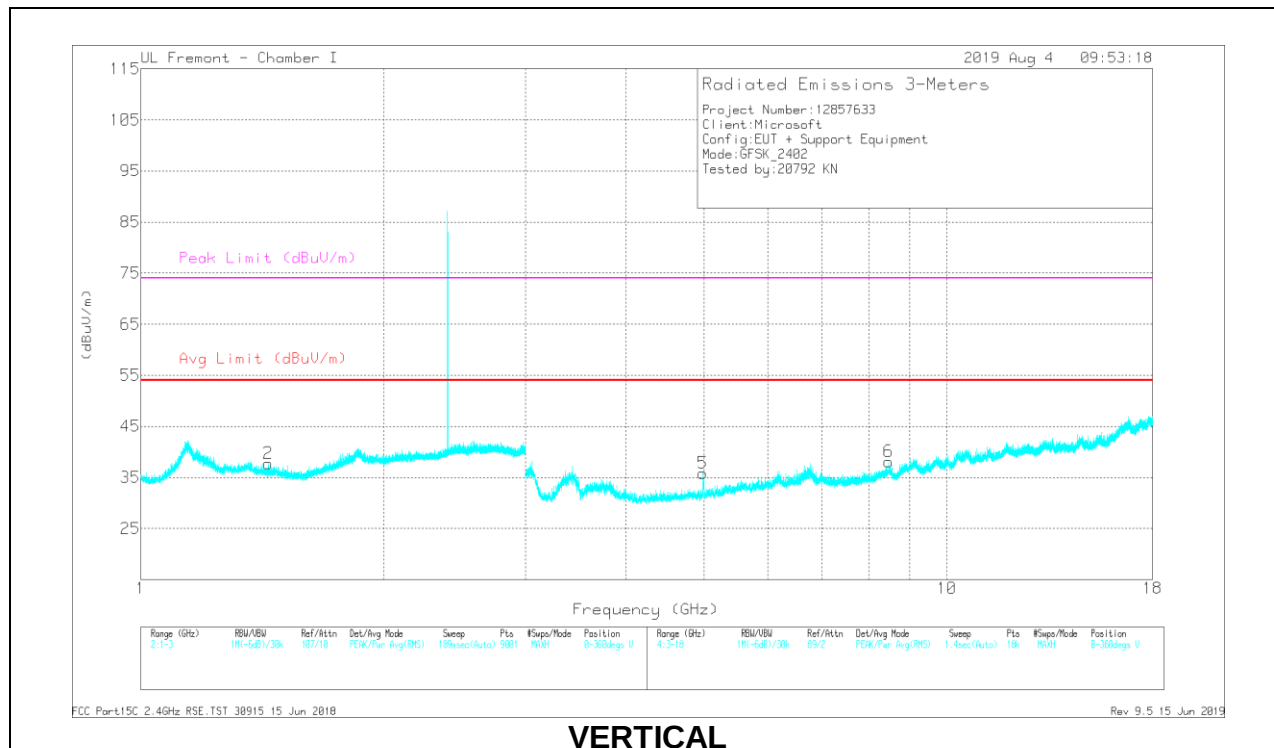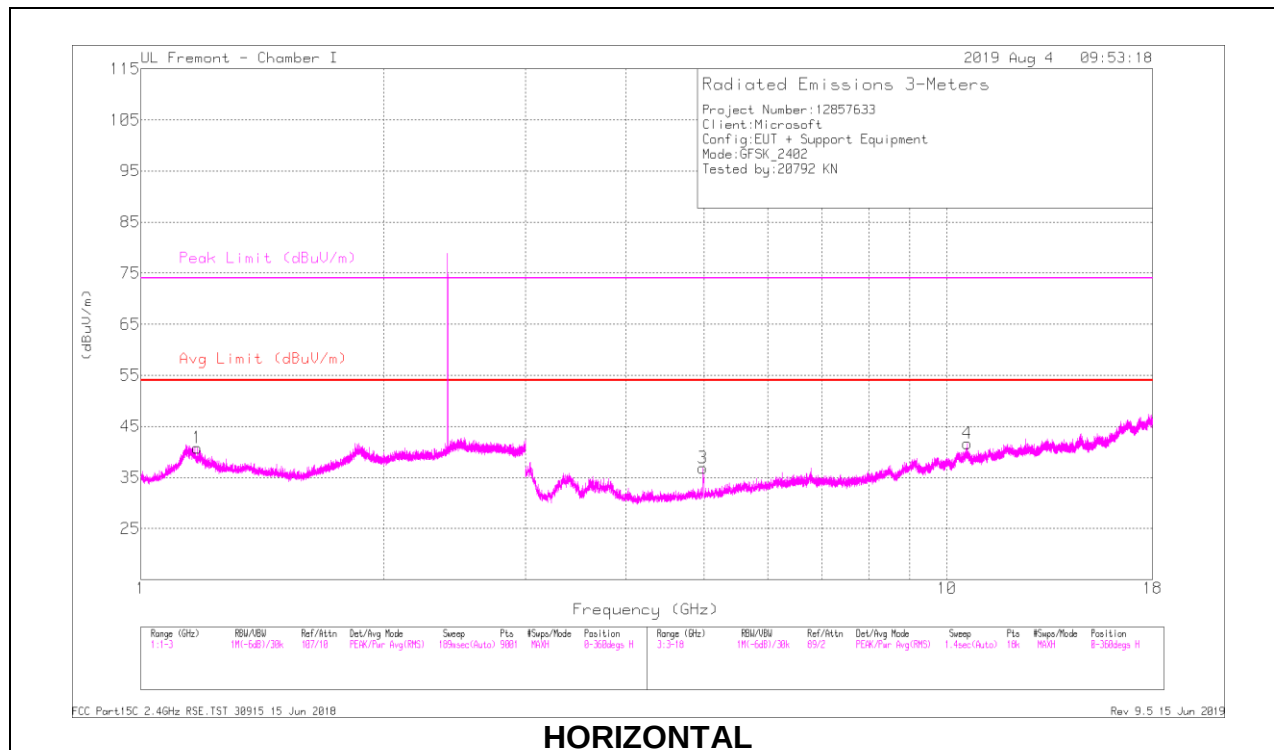



## RADIATED EMISSIONS

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T862 (dB/m) | Amp/Cbl/FI tr/Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|----------------|------------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 1.17666       | 45.96                | PKFH | 27.8           | -23.2                  | 50.56                      | -                  | -           | 74                  | -23.44         | 352            | 146         | H        |
|        | * 1.17287       | 33.11                | VA1T | 27.7           | -23.2                  | 37.61                      | 54                 | -16.39      | -                   | -              | 352            | 146         | H        |
| 2      | * 1.439         | 39.54                | PKFH | 28.4           | -23.4                  | 44.54                      | -                  | -           | 74                  | -29.46         | 204            | 239         | V        |
|        | * 1.43754       | 26.97                | VA1T | 28.4           | -23.4                  | 31.97                      | 54                 | -22.03      | -                   | -              | 204            | 239         | V        |
| 3      | * 4.97994       | 44.56                | PKFH | 34.1           | -29.1                  | 49.56                      | -                  | -           | 74                  | -24.44         | 122            | 165         | H        |
|        | * 4.98226       | 24.32                | VA1T | 34.1           | -29.1                  | 29.32                      | 54                 | -24.68      | -                   | -              | 122            | 165         | H        |
| 4      | * 10.60908      | 30.35                | PKFH | 37.9           | -20.1                  | 48.15                      | -                  | -           | 74                  | -25.85         | 260            | 259         | H        |
|        | * 10.60643      | 17.17                | VA1T | 37.9           | -20.1                  | 34.97                      | 54                 | -19.03      | -                   | -              | 260            | 259         | H        |
| 5      | * 4.97994       | 43.79                | PKFH | 34.1           | -29.1                  | 48.79                      | -                  | -           | 74                  | -25.21         | 297            | 178         | V        |
|        | * 4.98353       | 23.98                | VA1T | 34.2           | -29.1                  | 29.08                      | 54                 | -24.92      | -                   | -              | 297            | 178         | V        |
| 6      | * 8.47295       | 31.84                | PKFH | 35.8           | -23.2                  | 44.44                      | -                  | -           | 74                  | -29.56         | 167            | 307         | V        |
|        | * 8.47129       | 18.92                | VA1T | 35.8           | -23.2                  | 31.52                      | 54                 | -22.48      | -                   | -              | 167            | 307         | V        |

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

VA1T - FHSS: Linear Voltage Average  $V_B = 1/T_{on}$  where:  $T_{on}$  is transmit duration

## MID CHANNEL RESULTS

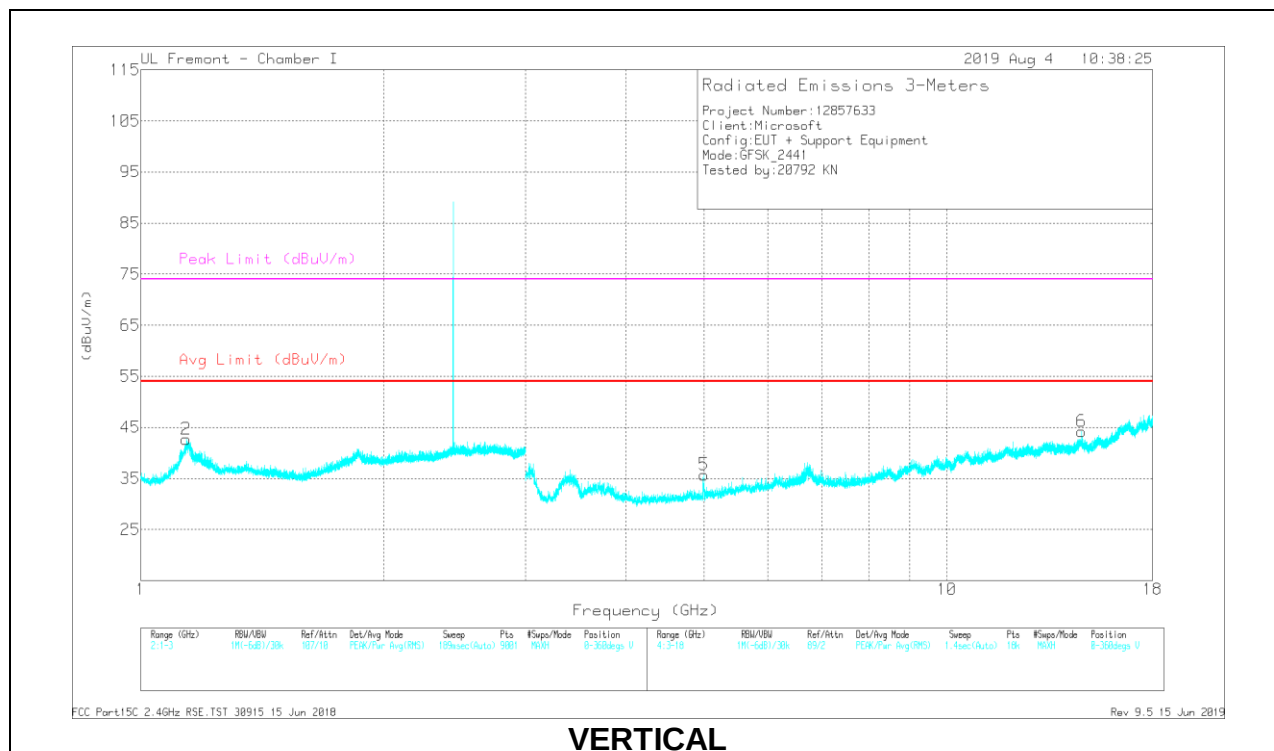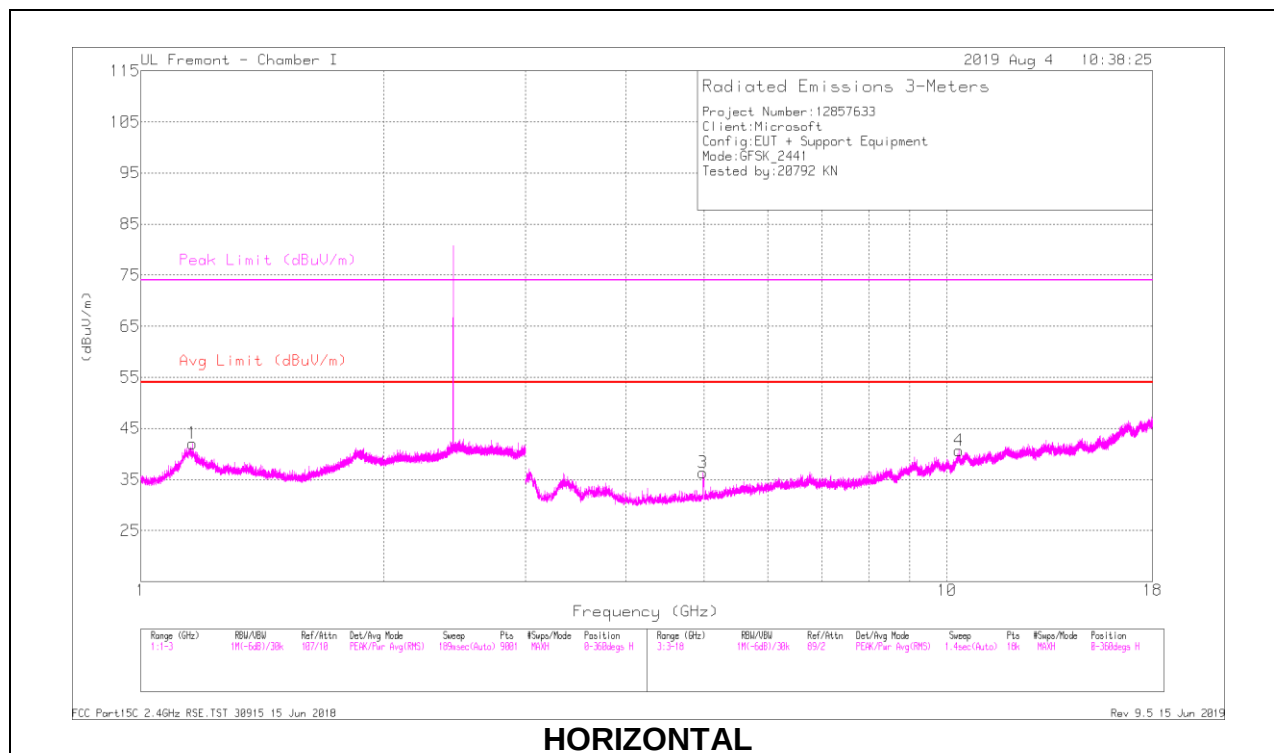



## RADIATED EMISSIONS

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T862 (dB/m) | Amp/Cbl/FI tr/Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|----------------|------------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 1.15743       | 41.97                | PKFH | 27.6           | -23.3                  | 46.27                      | -                  | -           | 74                  | -27.73         | 268            | 234         | H        |
|        | * 1.15901       | 29.58                | VA1T | 27.6           | -23.3                  | 33.88                      | 54                 | -20.12      | -                   | -              | 268            | 234         | H        |
| 2      | * 1.13853       | 48.46                | PKFH | 27.7           | -23.4                  | 52.76                      | -                  | -           | 74                  | -21.24         | 262            | 270         | V        |
|        | * 1.13876       | 35.86                | VA1T | 27.7           | -23.4                  | 40.16                      | 54                 | -13.84      | -                   | -              | 262            | 270         | V        |
| 3      | * 4.9799        | 46.05                | PKFH | 34.1           | -29.1                  | 51.05                      | -                  | -           | 74                  | -22.95         | 113            | 144         | H        |
|        | * 4.98068       | 24.21                | VA1T | 34.1           | -29.1                  | 29.21                      | 54                 | -24.79      | -                   | -              | 113            | 144         | H        |
| 4      | 10.35231        | 30.44                | PKFH | 37.4           | -20.5                  | 47.34                      | -                  | -           | -                   | -              | 40             | 116         | H        |
| 5      | * 4.99624       | 42.88                | PKFH | 34.2           | -29.1                  | 47.98                      | -                  | -           | 74                  | -26.02         | 301            | 201         | V        |
|        | * 4.99666       | 23.56                | VA1T | 34.2           | -29.1                  | 28.66                      | 54                 | -25.34      | -                   | -              | 301            | 201         | V        |
| 6      | 14.69611        | 31.73                | PKFH | 40             | -21.4                  | 50.33                      | -                  | -           | -                   | -              | 181            | 130         | V        |

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

## HIGH CHANNEL RESULTS

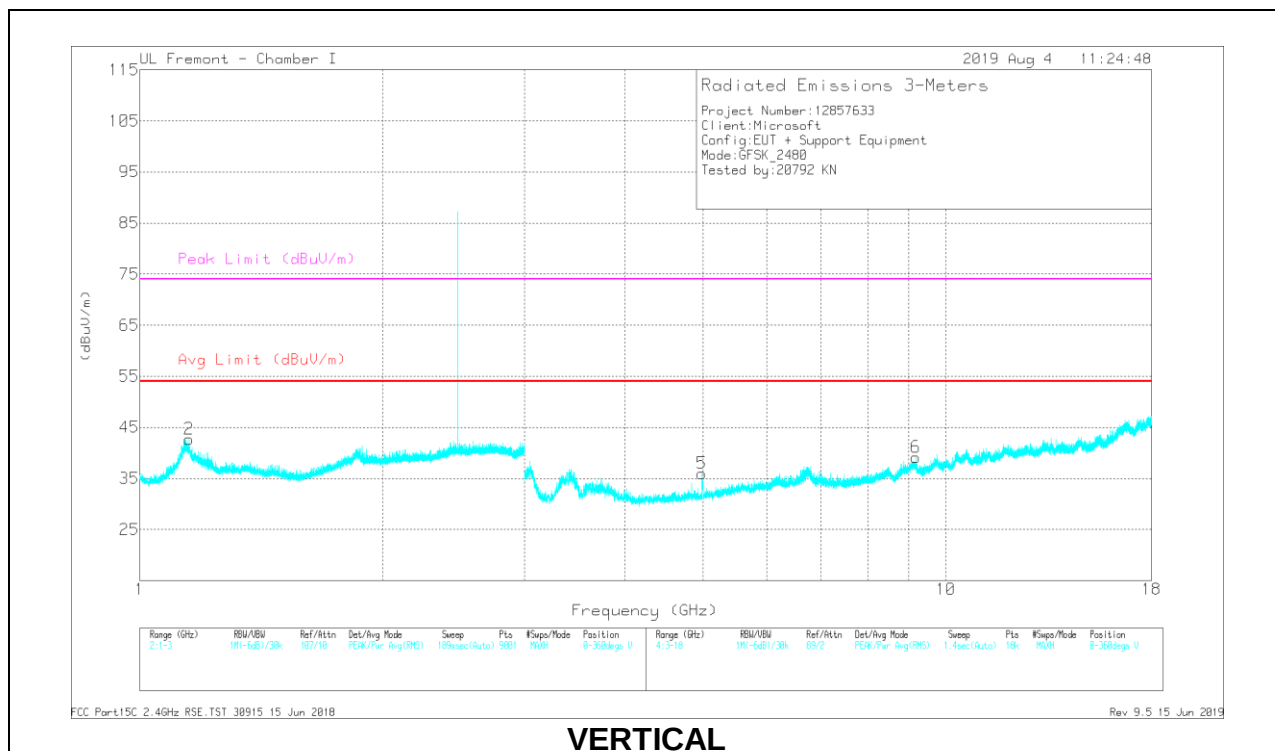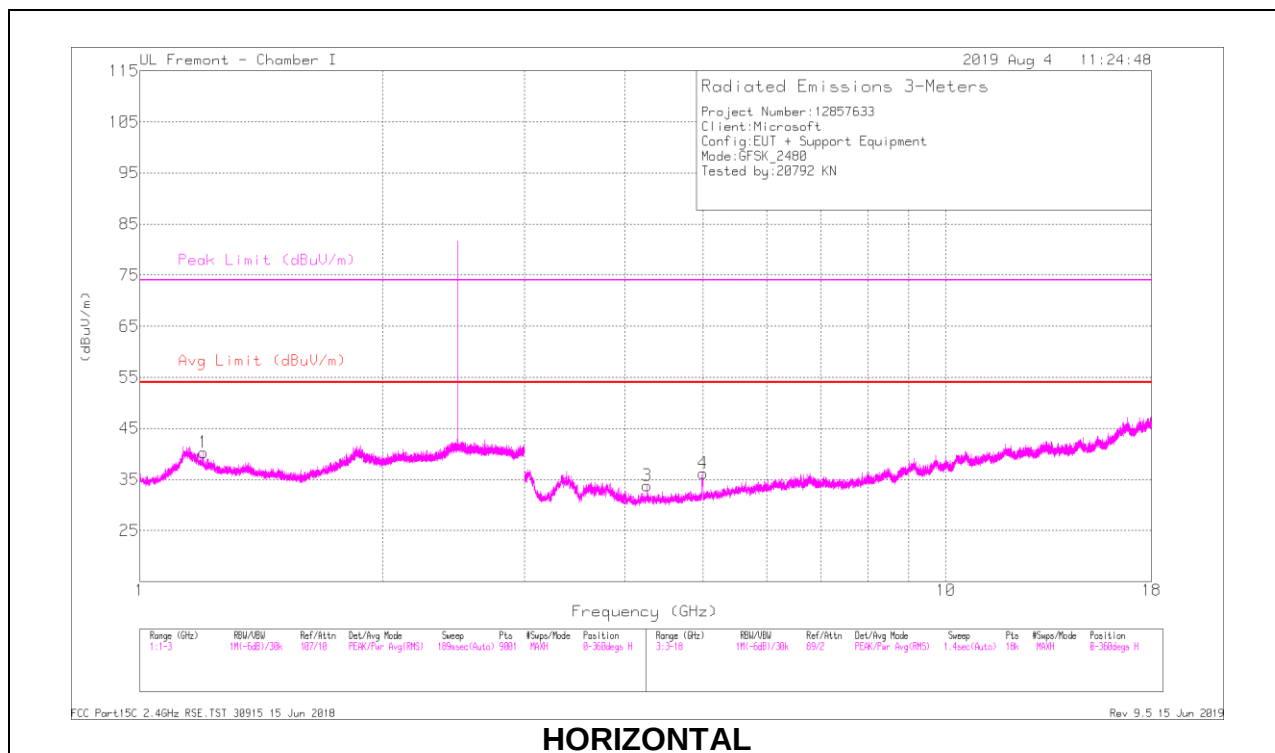

## RADIATED EMISSIONS

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T862 (dB/m) | Amp/Cbl/FI tr/Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|----------------|------------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 1.19776       | 42.61                | PKFH | 28.4           | -23                    | 48.01                      | -                  | -           | 74                  | -25.99         | 203            | 179         | H        |
|        | * 1.19825       | 28.65                | VA1T | 28.4           | -23                    | 34.05                      | 54                 | -19.95      | -                   | -              | 203            | 179         | H        |
| 2      | * 1.15125       | 41.95                | PKFH | 27.6           | -23.3                  | 46.25                      | -                  | -           | 74                  | -27.75         | 216            | 166         | V        |
|        | * 1.15154       | 28.78                | VA1T | 27.6           | -23.3                  | 33.08                      | 54                 | -20.92      | -                   | -              | 216            | 166         | V        |
| 3      | * 4.26239       | 35.31                | PKFH | 33.5           | -29                    | 39.81                      | -                  | -           | 74                  | -34.19         | 21             | 156         | H        |
|        | * 4.26149       | 22.86                | VA1T | 33.5           | -29.1                  | 27.26                      | 54                 | -26.74      | -                   | -              | 21             | 156         | H        |
| 4      | * 4.99961       | 44.55                | PKFH | 34.3           | -29                    | 49.85                      | -                  | -           | 74                  | -24.15         | 97             | 102         | H        |
|        | * 4.99808       | 23.98                | VA1T | 34.3           | -29                    | 29.28                      | 54                 | -24.72      | -                   | -              | 97             | 102         | H        |
| 5      | * 4.98311       | 42.44                | PKFH | 34.2           | -29.1                  | 47.54                      | -                  | -           | 74                  | -26.46         | 298            | 180         | V        |
|        | * 4.98172       | 23.79                | VA1T | 34.1           | -29.1                  | 28.79                      | 54                 | -25.21      | -                   | -              | 298            | 180         | V        |
| 6      | * 9.18622       | 31.19                | PKFH | 36.4           | -21.6                  | 45.99                      | -                  | -           | 74                  | -28.01         | 64             | 209         | V        |
|        | * 9.18839       | 18.11                | VA1T | 36.4           | -21.7                  | 32.81                      | 54                 | -21.19      | -                   | -              | 64             | 209         | V        |


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

## 9.1.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

### BANDEDGE (LOW CHANNEL)

#### HORIZONTAL RESULT

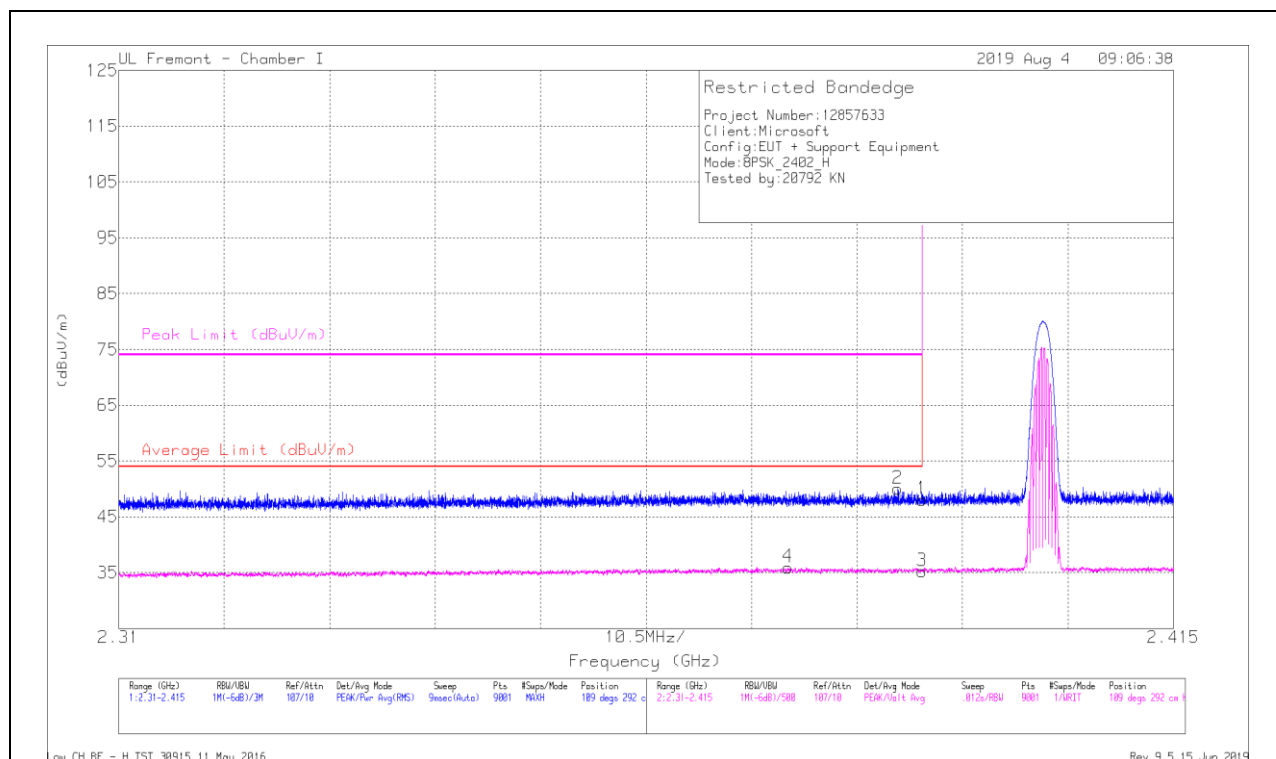


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T862 (dBm) | Amp/Cbl/Fit r/Pad (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|---------------|------------------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | 2.38999         | 37.82                | Pk   | 31.9          | -21.6                  | 48.12                      | -                      | -           | 74                  | -25.88         | 109            | 292         | H        |
| 2      | 2.38757         | 39.74                | Pk   | 31.9          | -21.6                  | 50.04                      | -                      | -           | 74                  | -23.96         | 109            | 292         | H        |
| 3      | 2.38999         | 24.94                | VA1T | 31.9          | -21.6                  | 35.24                      | 54                     | -18.76      | -                   | -              | 109            | 292         | H        |
| 4      | 2.37662         | 25.55                | VA1T | 31.9          | -21.5                  | 35.95                      | 54                     | -18.05      | -                   | -              | 109            | 292         | H        |

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average  $V_B = 1/T_{on}$  where:  $T_{on}$  is transmit duration

## VERTICAL RESULT

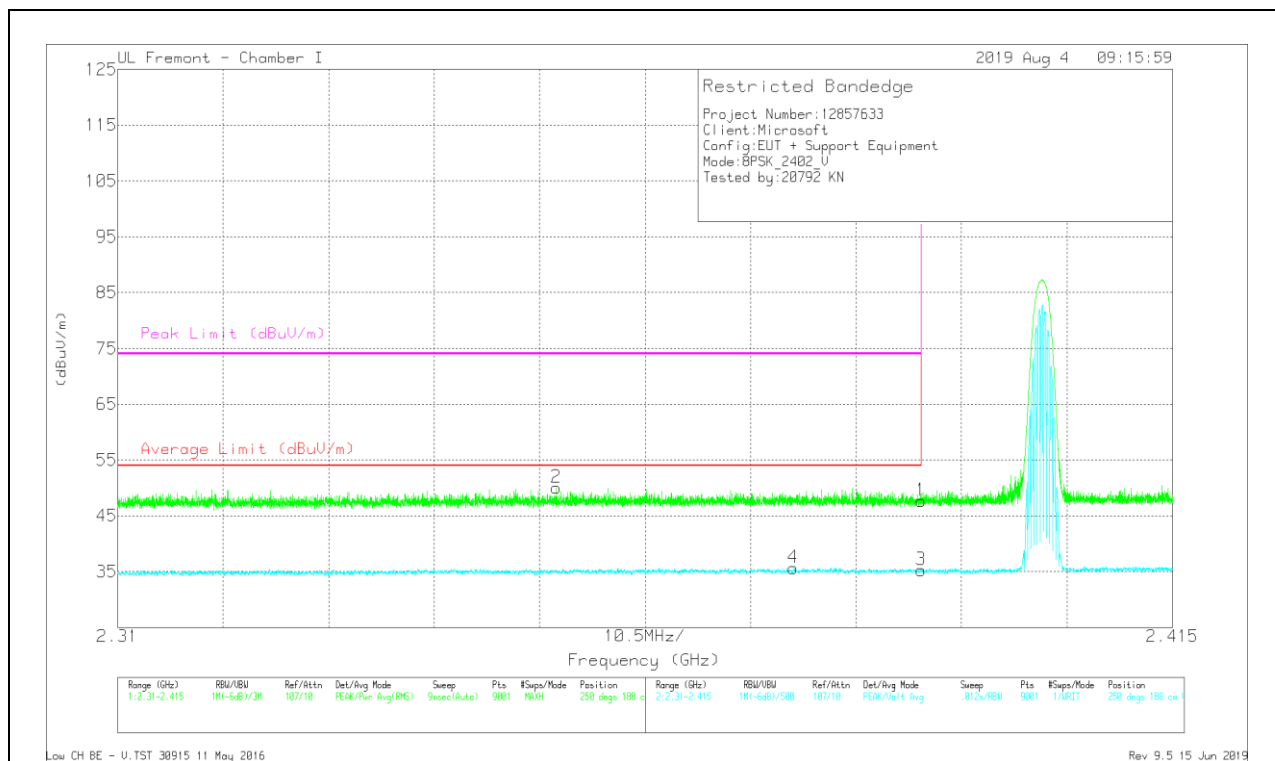


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T862 (dBm) | Amp/Cbl/Fit r/Pad (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|---------------|------------------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | 2.38999         | 37.33                | Pk   | 31.9          | -21.6                  | 47.63                      | -                      | -           | 74                  | -26.37         | 250            | 188         | V        |
| 2      | 2.35368         | 39.86                | Pk   | 31.7          | -21.5                  | 50.06                      | -                      | -           | 74                  | -23.94         | 250            | 188         | V        |
| 3      | 2.38999         | 24.95                | VA1T | 31.9          | -21.6                  | 35.25                      | 54                     | -18.75      | -                   | -              | 250            | 188         | V        |
| 4      | 2.37726         | 25.27                | VA1T | 31.9          | -21.5                  | 35.67                      | 54                     | -18.33      | -                   | -              | 250            | 188         | V        |

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average  $V_B = 1/T_{on}$  where:  $T_{on}$  is transmit duration

## BANDEDGE (HIGH CHANNEL)

### HORIZONTAL RESULT

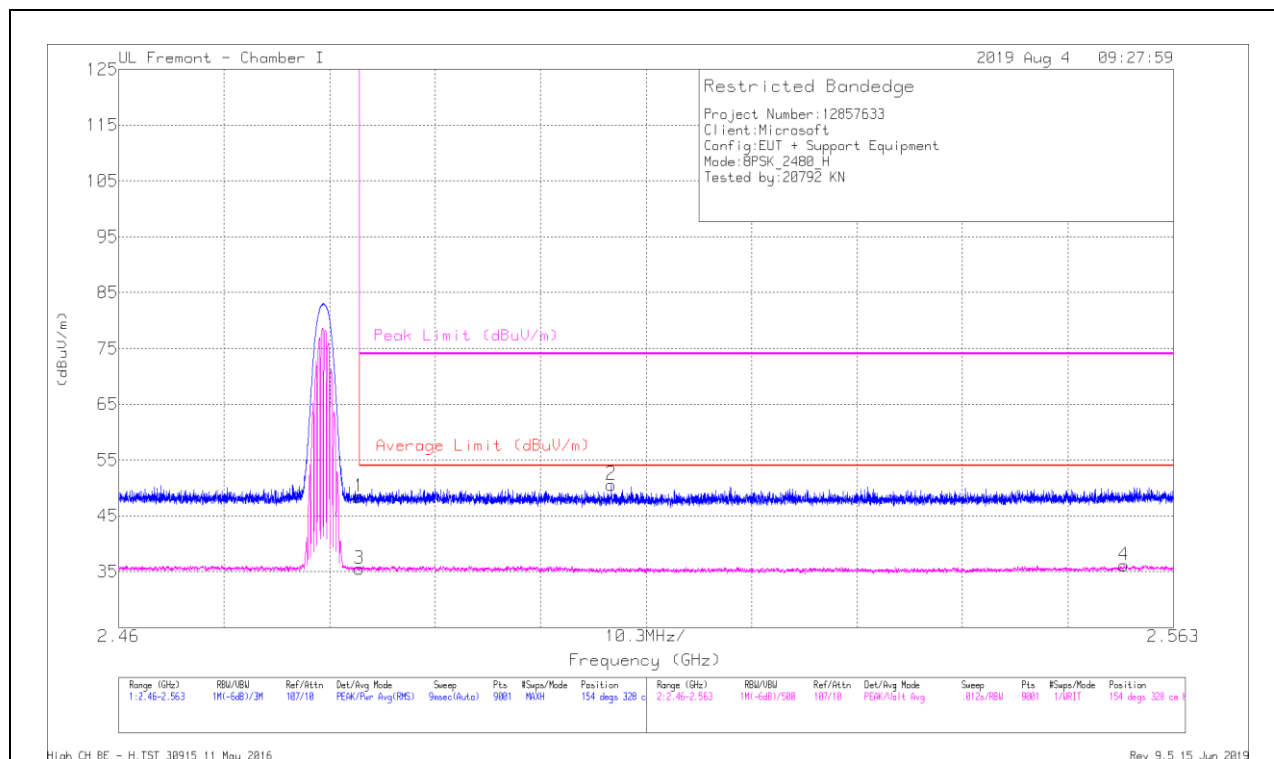


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T862 (dBm) | Amp/Cbl/Fit r/Pad (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|---------------|------------------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | 2.48351         | 37.73                | Pk   | 32.4          | -21.7                  | 48.43                      | -                      | -           | 74                  | -25.57         | 154            | 328         | H        |
| 2      | 2.50812         | 40.1                 | Pk   | 32.3          | -21.8                  | 50.6                       | -                      | -           | 74                  | -23.4          | 154            | 328         | H        |
| 3      | 2.48351         | 24.77                | VA1T | 32.4          | -21.7                  | 35.47                      | 54                     | -18.53      | -                   | -              | 154            | 328         | H        |
| 4      | 2.55818         | 25.45                | VA1T | 32.3          | -21.6                  | 36.15                      | 54                     | -17.85      | -                   | -              | 154            | 328         | H        |

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

## VERTICAL RESULT

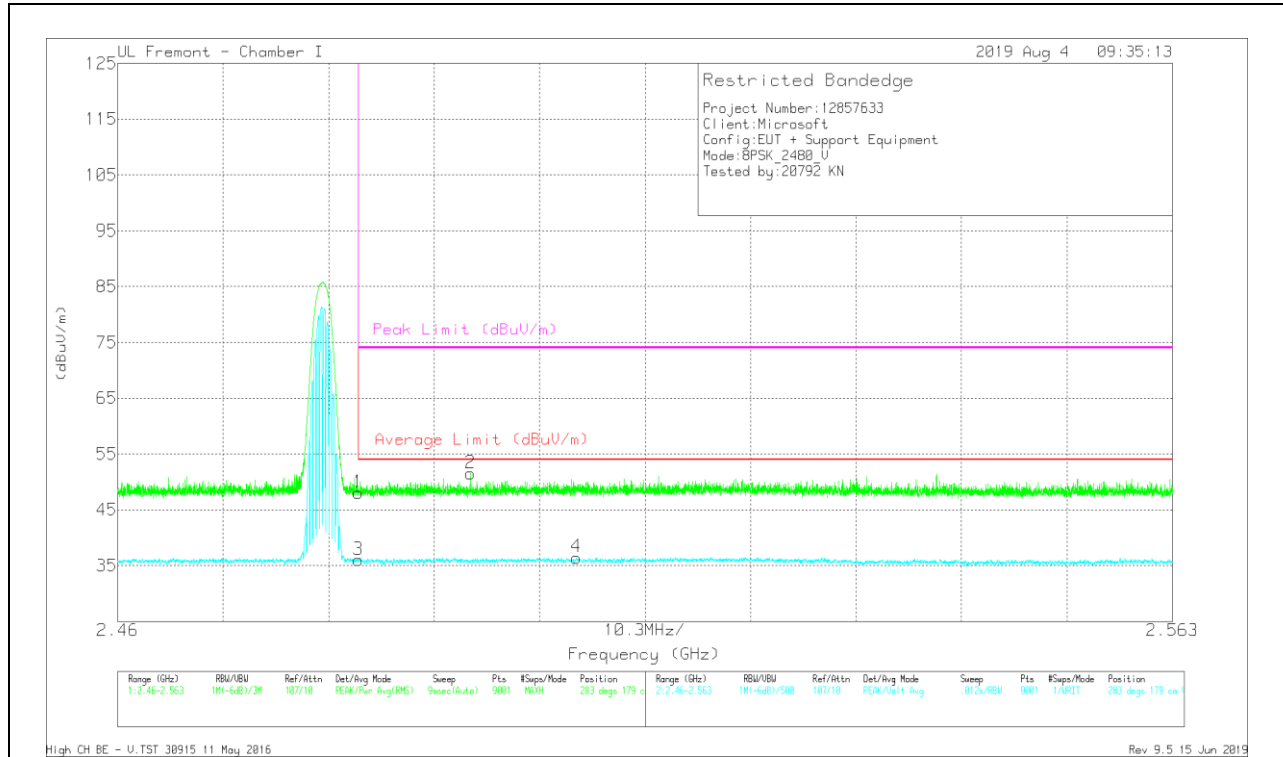



| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T862 (dBm) | Amp/Cbl/Fit r/Pad (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|---------------|------------------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | 2.48351         | 37.31                | Pk   | 32.4          | -21.7                  | 48.01                      | -                      | -           | 74                  | -25.99         | 283            | 179         | V        |
| 2      | 2.49446         | 41.07                | Pk   | 32.3          | -21.8                  | 51.57                      | -                      | -           | 74                  | -22.43         | 283            | 179         | V        |
| 3      | 2.48351         | 25.3                 | VA1T | 32.4          | -21.7                  | 36                         | 54                     | -18         | -                   | -              | 283            | 179         | V        |
| 4      | 2.5048          | 25.95                | VA1T | 32.3          | -21.8                  | 36.45                      | 54                     | -17.55      | -                   | -              | 283            | 179         | V        |

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average  $V_B = 1/T_{on}$  where:  $T_{on}$  is transmit duration

## HARMONICS AND SPURIOUS EMISSIONS

### LOW CHANNEL RESULTS

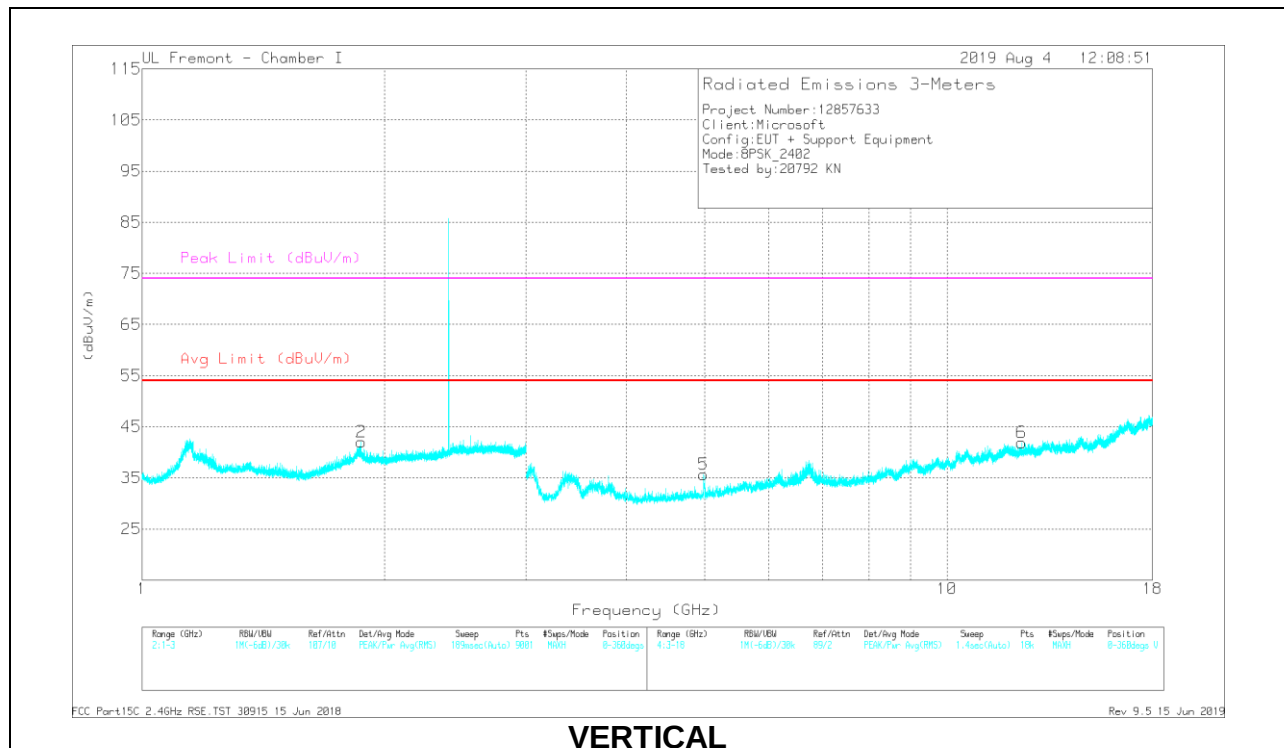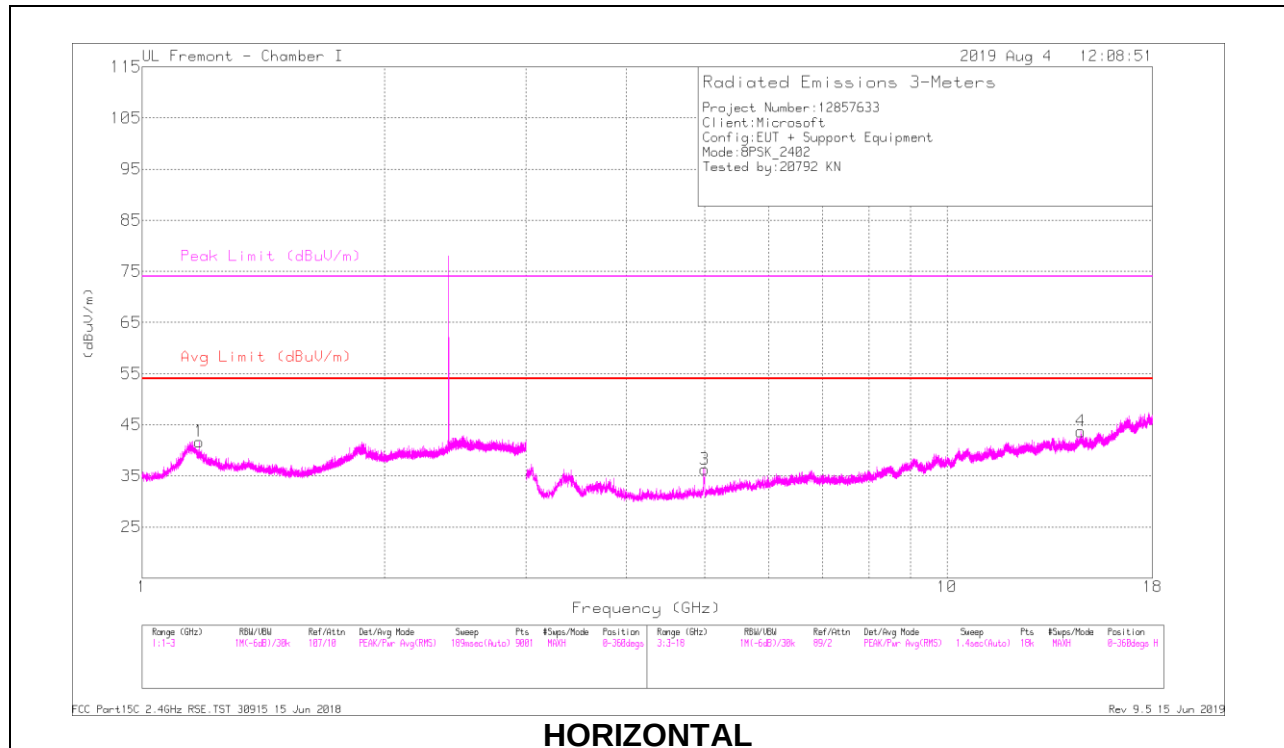



## RADIATED EMISSIONS

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T862 (dB/m) | Amp/Cbl/FI tr/Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|----------------|------------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 1.17788       | 45.75                | PKFH | 27.9           | -23.2                  | 50.45                      | -                  | -           | 74                  | -23.55         | 347            | 139         | H        |
|        | * 1.17559       | 32.13                | VA1T | 27.8           | -23.2                  | 36.73                      | 54                 | -17.27      | -                   | -              | 347            | 139         | H        |
| 2      | 1.87206         | 41.99                | PKFH | 30.9           | -22.3                  | 50.59                      | -                  | -           | -                   | -              | 293            | 226         | V        |
| 3      | * 4.9967        | 43.64                | PKFH | 34.2           | -29.1                  | 48.74                      | -                  | -           | 74                  | -25.26         | 97             | 154         | H        |
|        | * 4.99579       | 24.06                | VA1T | 34.2           | -29.1                  | 29.16                      | 54                 | -24.84      | -                   | -              | 97             | 154         | H        |
| 4      | 14.65668        | 31.62                | PKFH | 40             | -21.3                  | 50.32                      | -                  | -           | -                   | -              | 37             | 141         | H        |
| 5      | * 4.98159       | 43.73                | PKFH | 34.1           | -29.1                  | 48.73                      | -                  | -           | 74                  | -25.27         | 298            | 225         | V        |
|        | * 4.98283       | 23.99                | VA1T | 34.1           | -29.1                  | 28.99                      | 54                 | -25.01      | -                   | -              | 298            | 225         | V        |
| 6      | * 12.37802      | 30.27                | PKFH | 39             | -21.1                  | 48.17                      | -                  | -           | 74                  | -25.83         | 343            | 198         | V        |
|        | * 12.37619      | 18.06                | VA1T | 39             | -21.1                  | 35.96                      | 54                 | -18.04      | -                   | -              | 343            | 198         | V        |

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

## MID CHANNEL RESULTS

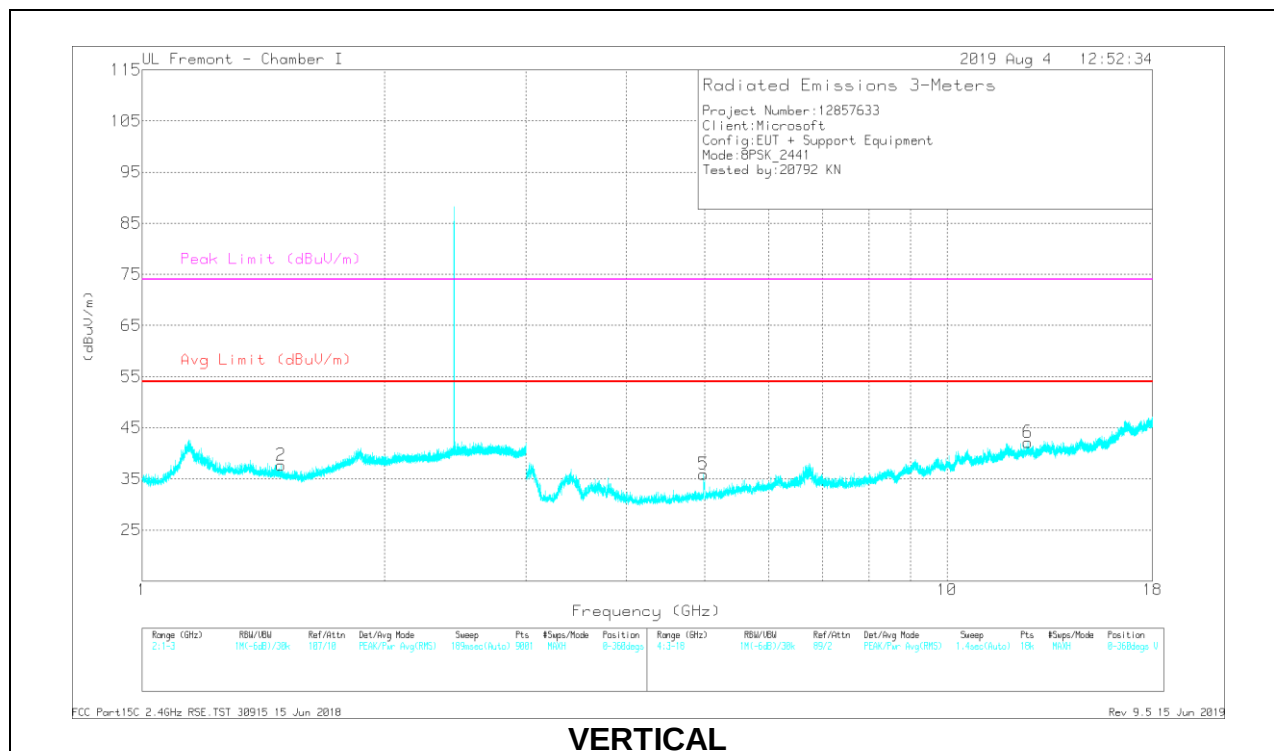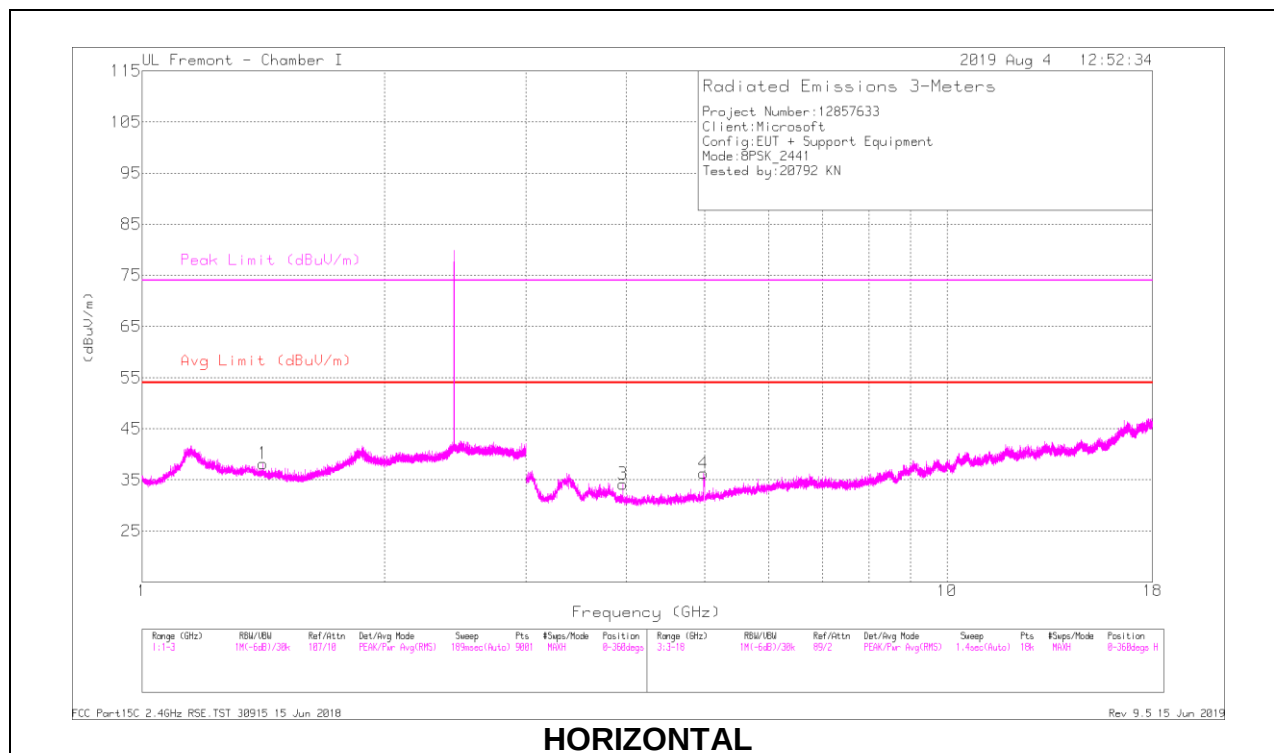



## RADIATED EMISSIONS

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T862 (dB/m) | Amp/Cbl/FI tr/Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|----------------|------------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 1.40939       | 39.56                | PKFH | 28.8           | -23.3                  | 45.06                      | -                  | -           | 74                  | -28.94         | 200            | 202         | H        |
|        | * 1.41844       | 26.54                | VA1T | 28.7           | -23.3                  | 31.94                      | 54                 | -22.06      | -                   | -              | 200            | 202         | H        |
| 2      | * 1.49284       | 40.34                | PKFH | 28             | -23.4                  | 44.94                      | -                  | -           | 74                  | -29.06         | 156            | 230         | V        |
|        | * 1.48512       | 27.22                | VA1T | 28.2           | -23.5                  | 31.92                      | 54                 | -22.08      | -                   | -              | 156            | 230         | V        |
| 3      | * 3.95545       | 36.83                | PKFH | 33.3           | -29.9                  | 40.23                      | -                  | -           | 74                  | -33.77         | 84             | 138         | H        |
|        | * 3.95265       | 24.21                | VA1T | 33.3           | -30                    | 27.51                      | 54                 | -26.49      | -                   | -              | 84             | 138         | H        |
| 4      | * 4.98014       | 45.22                | PKFH | 34.1           | -29.1                  | 50.22                      | -                  | -           | 74                  | -23.78         | 108            | 143         | H        |
|        | * 4.98135       | 24.27                | VA1T | 34.1           | -29.1                  | 29.27                      | 54                 | -24.73      | -                   | -              | 108            | 143         | H        |
| 5      | * 4.97988       | 43.68                | PKFH | 34.1           | -29.1                  | 48.68                      | -                  | -           | 74                  | -25.32         | 294            | 199         | V        |
|        | * 4.9825        | 24.22                | VA1T | 34.1           | -29.1                  | 29.22                      | 54                 | -24.78      | -                   | -              | 294            | 199         | V        |
| 6      | * 12.5925       | 30.61                | PKFH | 39             | -21.2                  | 48.41                      | -                  | -           | 74                  | -25.59         | 281            | 160         | V        |
|        | * 12.5948       | 18.27                | VA1T | 39.1           | -21.2                  | 36.17                      | 54                 | -17.83      | -                   | -              | 281            | 160         | V        |

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

## HIGH CHANNEL RESULTS

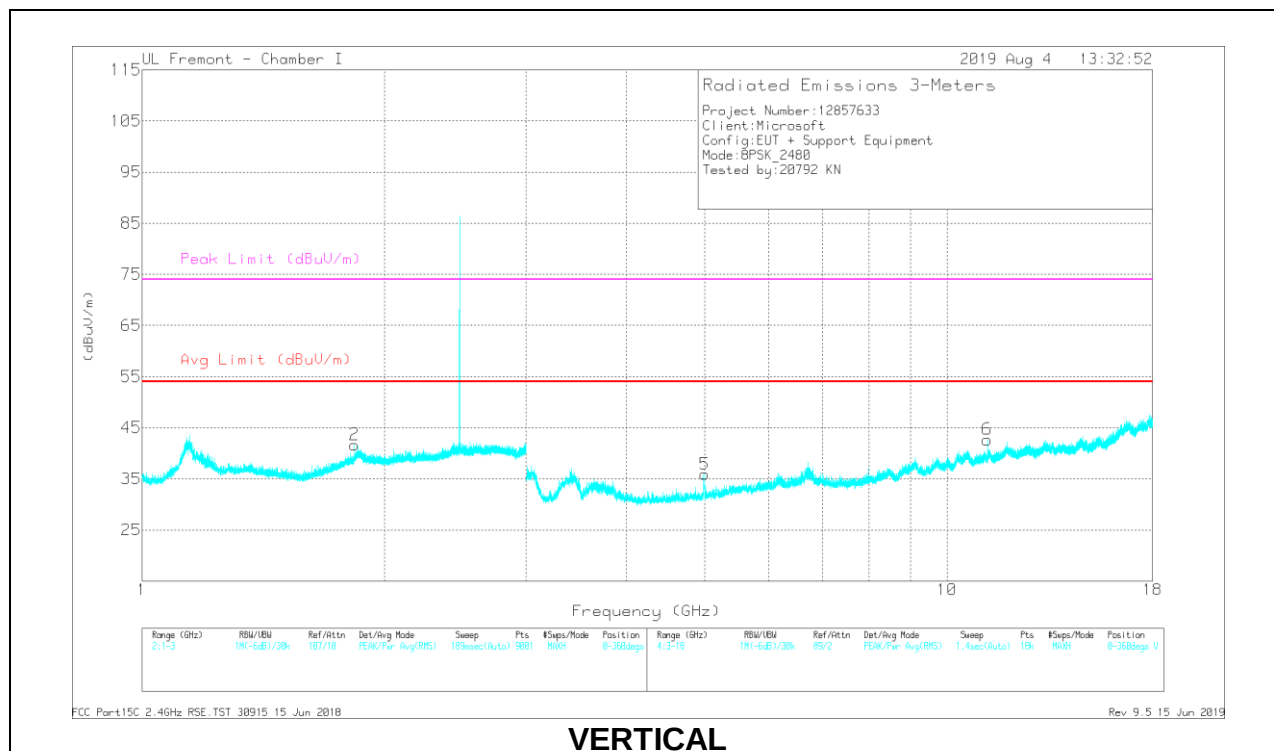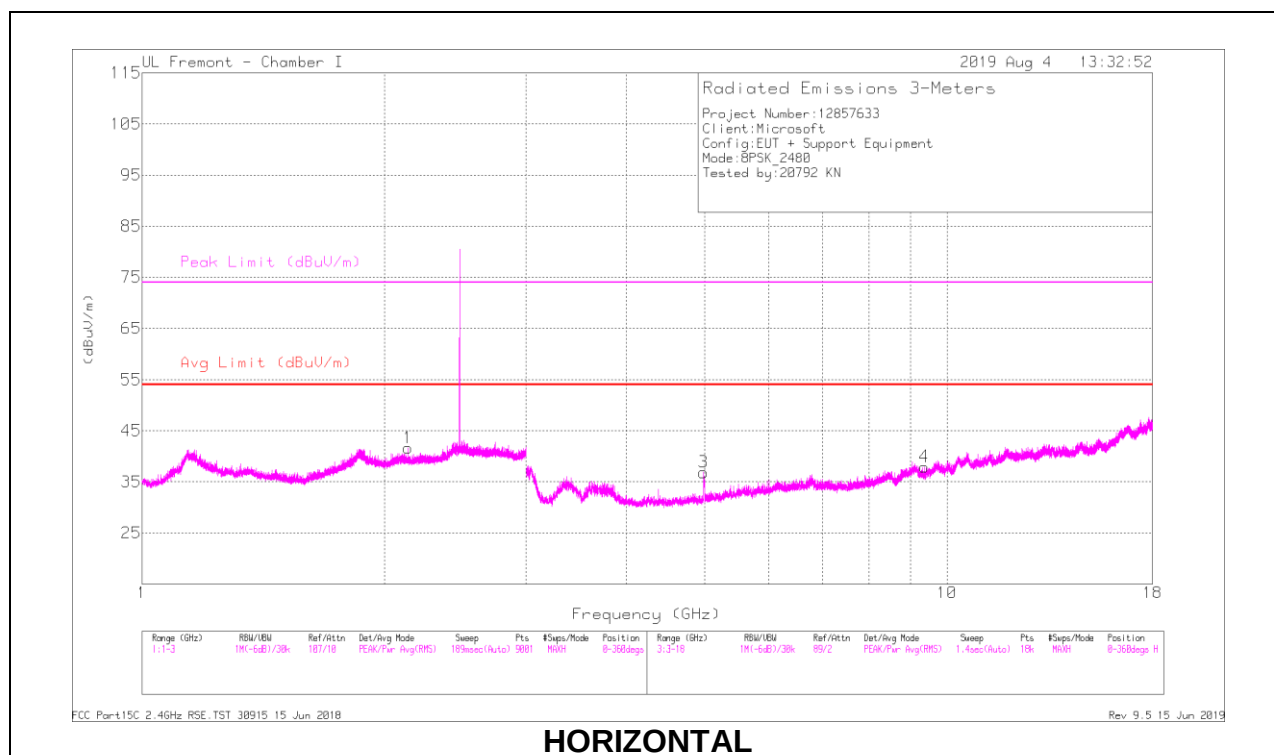

## RADIATED EMISSIONS

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T862 (dB/m) | Amp/Cbl/FI tr/Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|----------------|------------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | 2.13927         | 40.05                | PKFH | 31.1           | -22.1                  | 49.05                      | -                  | -           | -                   | -              | 338            | 163         | H        |
| 2      | 1.83476         | 38.15                | PKFH | 30.7           | -22.2                  | 46.65                      | -                  | -           | -                   | -              | 105            | 206         | V        |
| 3      | * 4.97997       | 45.78                | PKFH | 34.1           | -29.1                  | 50.78                      | -                  | -           | 74                  | -23.22         | 98             | 124         | H        |
|        | * 4.98342       | 24.47                | VA1T | 34.2           | -29.1                  | 29.57                      | 54                 | -24.43      | -                   | -              | 98             | 124         | H        |
| 4      | * 9.36842       | 30.81                | PKFH | 36.4           | -22.1                  | 45.11                      | -                  | -           | 74                  | -28.89         | 167            | 215         | H        |
|        | * 9.36797       | 17.47                | VA1T | 36.4           | -22.1                  | 31.77                      | 54                 | -22.23      | -                   | -              | 167            | 215         | H        |
| 5      | * 4.99581       | 42.76                | PKFH | 34.2           | -29.1                  | 47.86                      | -                  | -           | 74                  | -26.14         | 291            | 196         | V        |
|        | * 4.99594       | 23.79                | VA1T | 34.2           | -29.1                  | 28.89                      | 54                 | -25.11      | -                   | -              | 291            | 196         | V        |
| 6      | * 11.22016      | 32.44                | PKFH | 38             | -20.5                  | 49.94                      | -                  | -           | 74                  | -24.06         | 213            | 211         | V        |
|        | * 11.21993      | 24.25                | VA1T | 38             | -20.5                  | 41.75                      | 54                 | -12.25      | -                   | -              | 213            | 211         | V        |

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

## 9.2. SPURIOUS EMISSIONS FOR COLLOCATION



### TEST-CASE CONDITIONS

| Test Case # | Antenna   | Mode                           | Frequency (MHz) |
|-------------|-----------|--------------------------------|-----------------|
| 1           | Antenna 1 | BT, 8PSK & WLAN 5GHz, 11n HT20 | 2441 & 5500     |
| 2           | Antenna 1 | BT, 8PSK                       | 2441            |
|             | Antenna 2 | WLAN 2.4GHz, 11g               | 2437            |
| 3           | Antenna 1 | BT, 8PSK                       | 2441            |
|             | Antenna 2 | WLAN 5GHz, 11n HT20            | 5500            |

For simultaneous transmission of any BT 8PSK (2.4GHz) and WLAN (2.4 GHz) bands, and BT 8PSK (2.4GHz) and WLAN (5GHz) bands on different antennas, investigation has been performed and no noticeable new emission was found.

## 9.2.1. TEST CASE 1

### Antenna 1 BT 8PSK 2441 + Antenna 1 WLAN 5GHz 802.11n HT20 5500MHz

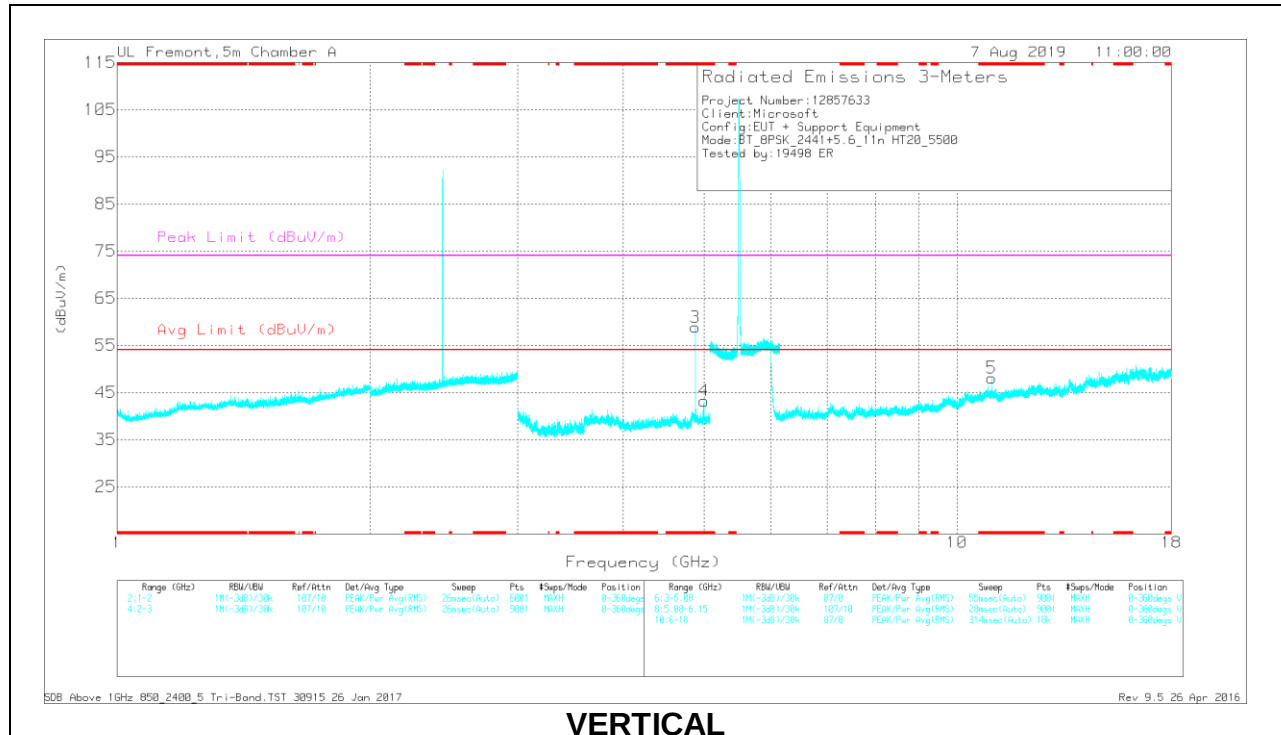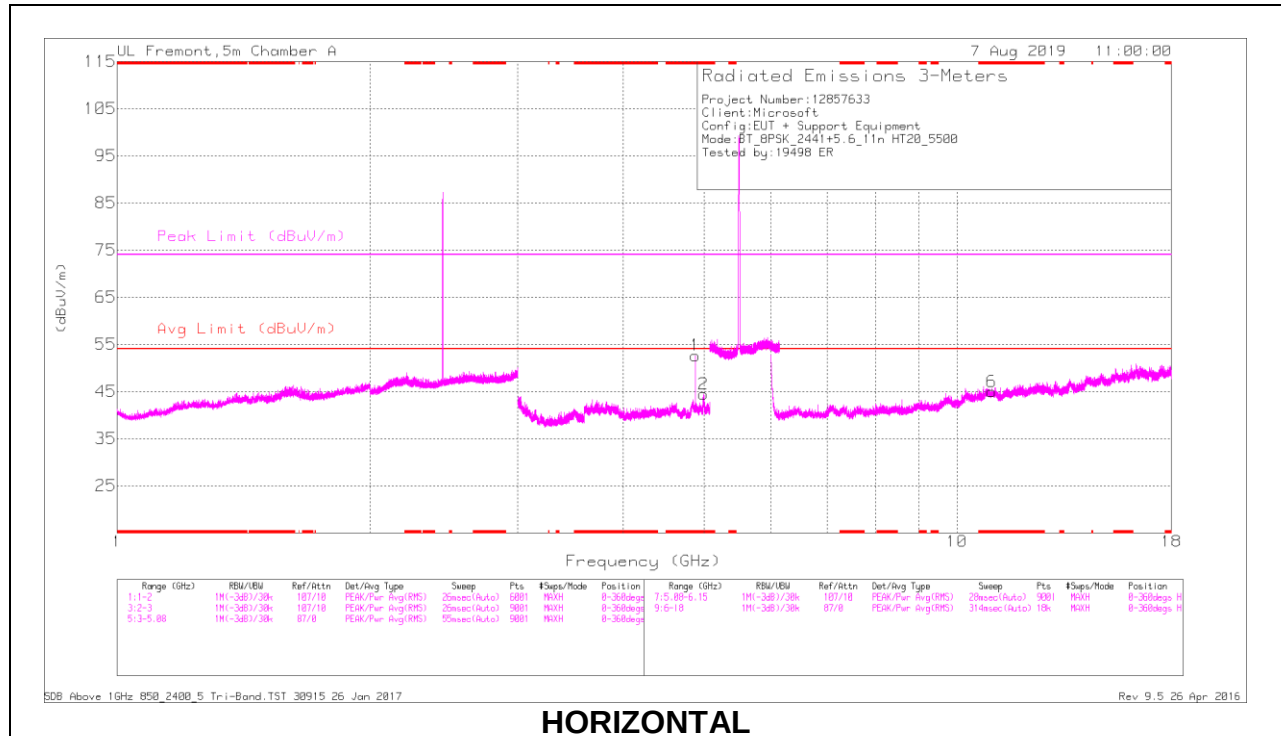

## RADIATED EMISSIONS

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T346 (dB/m) | Amp/Cbl/Filtr/Pad (dB) | Filter (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|----------------|------------------------|-------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 4.882         | 48.51                | PKFH | 34.1           | -26.2                  | 3           | 59.41                      | -                  | -           | 74                  | -14.59         | 262            | 391         | H        |
| 2      | * 4.995         | 40.27                | PKFH | 34.3           | -27.7                  | 3           | 49.87                      | -                  | -           | 74                  | -24.13         | 0              | 142         | H        |
| 3      | * 4.882         | 52.05                | PKFH | 34.1           | -26.2                  | 1           | 60.95                      | -                  | -           | 74                  | -13.05         | 170            | 391         | V        |
| 4      | * 4.991         | 39.88                | PKFH | 34.3           | -27.7                  | 1           | 47.48                      | -                  | -           | 74                  | -26.52         | 22             | 130         | V        |
| 5      | * 10.996        | 33.87                | PKFH | 37.9           | -19.6                  | 0           | 52.17                      | -                  | -           | 74                  | -21.83         | 73             | 278         | H        |
| 6      | * 11.004        | 34.38                | PKFH | 37.9           | -19.7                  | 0           | 52.58                      | -                  | -           | 74                  | -21.42         | 247            | 290         | V        |


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PKFH FHSS/BT RB=100k for Frequencies<1GHz / RB=1MHz for Frequencies>1GHz, VB=3 x RB, Peak

**Note:** No average measurement required according to FCC document: DA 00 -705.

### 9.3. WORST CASE BELOW 30MHZ

#### SPURIOUS EMISSIONS BELOW 30 MHz (WORST-CASE CONFIGURATION)

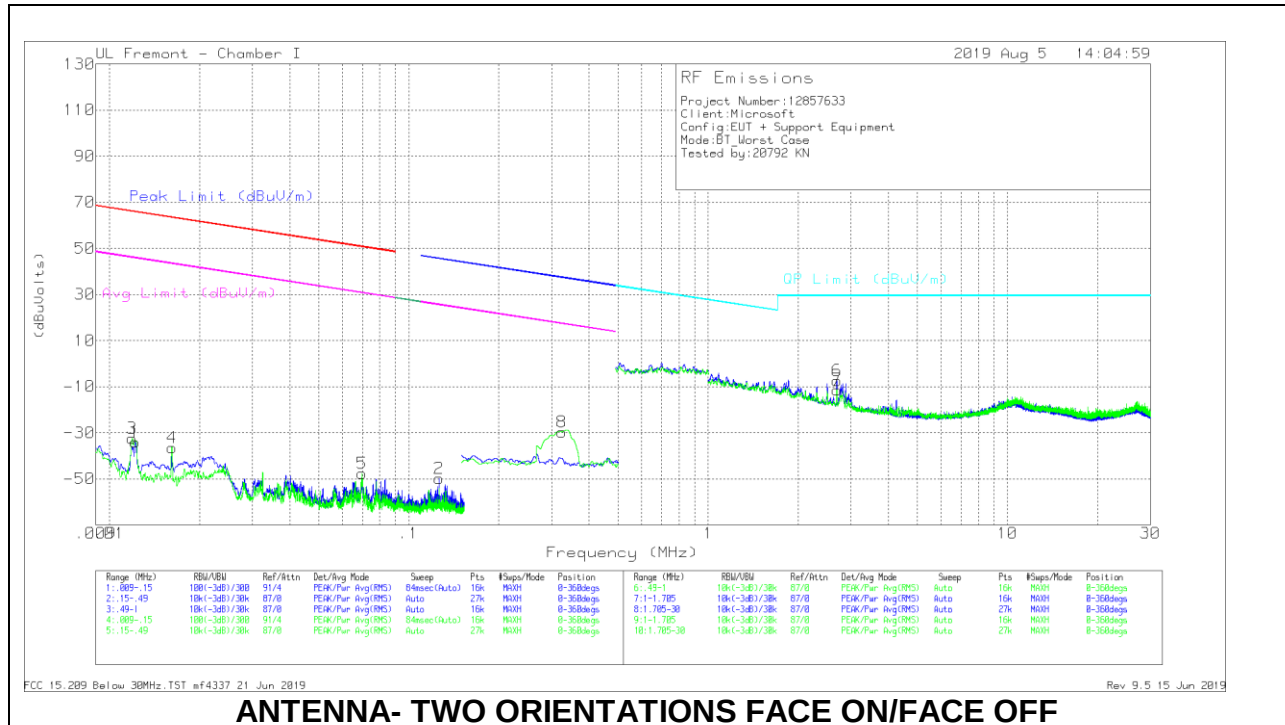

## Below 30MHz Data

| Marker | Frequency (MHz) | Meter Reading (dBuV) | Det | Loop Antenna (ACF) | Cables w/ PRE0180175 (dB) | Dist Corr 300m | Corrected Reading (dBuVolts) | Peak Limit (dBuV/m) | Margin (dB) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | Margin (dB) | Avg Limit (dBuV/m) | Margin (dB) | Azimuth (Degs) |
|--------|-----------------|----------------------|-----|--------------------|---------------------------|----------------|------------------------------|---------------------|-------------|--------------------|-------------|---------------------|-------------|--------------------|-------------|----------------|
| 1      | .0122           | 18.53                | Pk  | 59.9               | -32.4                     | -80            | -33.97                       | 65.85               | -99.82      | 45.85              | -79.82      | -                   | -           | -                  | -           | 0-360          |
| 2      | .12617          | 6.39                 | Pk  | 55.6               | -31.9                     | -80            | -49.91                       | -                   | -           | -                  | -           | 45.61               | -95.52      | 25.61              | -75.52      | 0-360          |
| 3      | .01192          | 19.99                | Pk  | 59.9               | -32.4                     | -80            | -32.51                       | 66.06               | -98.57      | 46.06              | -78.57      | -                   | -           | -                  | -           | 0-360          |
| 4      | .01617          | 16.6                 | Pk  | 59.3               | -32.4                     | -80            | -36.5                        | 63.41               | -99.91      | 43.41              | -79.91      | -                   | -           | -                  | -           | 0-360          |
| 5      | .06982          | 8.45                 | Pk  | 55.8               | -32                       | -80            | -47.75                       | 50.71               | -98.46      | 30.71              | -78.46      | -                   | -           | -                  | -           | 0-360          |
| 8      | .32436          | 26.25                | Pk  | 56.1               | -31.9                     | -80            | -29.55                       | -                   | -           | -                  | -           | 37.39               | -66.94      | 17.39              | -46.94      | 0-360          |



Pk - Peak detector

| Marker | Frequency (MHz) | Meter Reading (dBuV) | Det | Loop Antenna (ACF) | Cables w/ PRE0180175 (dB) | Dist Corr 30m (dB) 40Log | Corrected Reading (dBuVolts) | QP Limit (dBuV/m) | Margin (dB) | Azimuth (Degs) |
|--------|-----------------|----------------------|-----|--------------------|---------------------------|--------------------------|------------------------------|-------------------|-------------|----------------|
| 6      | 2.68907         | 24.58                | Pk  | 39.7               | -31.7                     | -40                      | -7.42                        | 29.5              | -36.92      | 0-360          |
| 7      | 2.68802         | 20.69                | Pk  | 39.7               | -31.7                     | -40                      | -11.31                       | 29.5              | -40.81      | 0-360          |

Pk - Peak detector

## 9.4. WORST CASE BELOW 1 GHZ

### SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

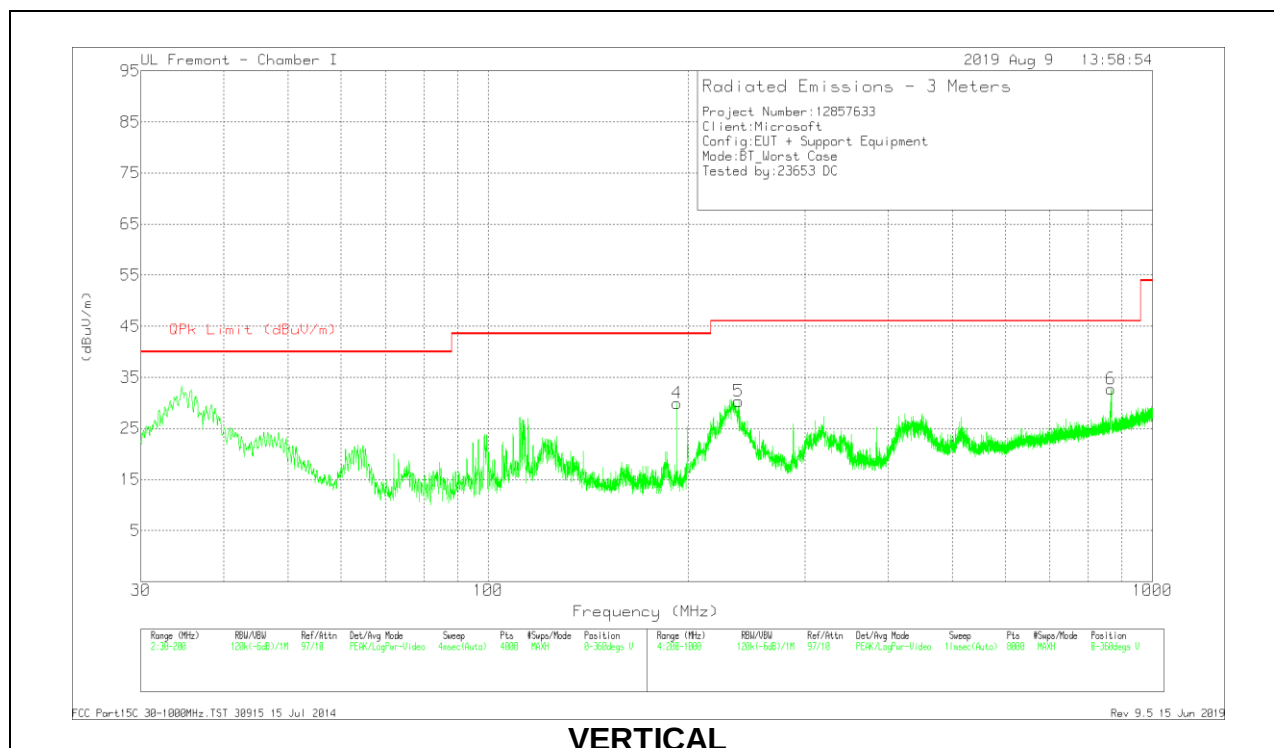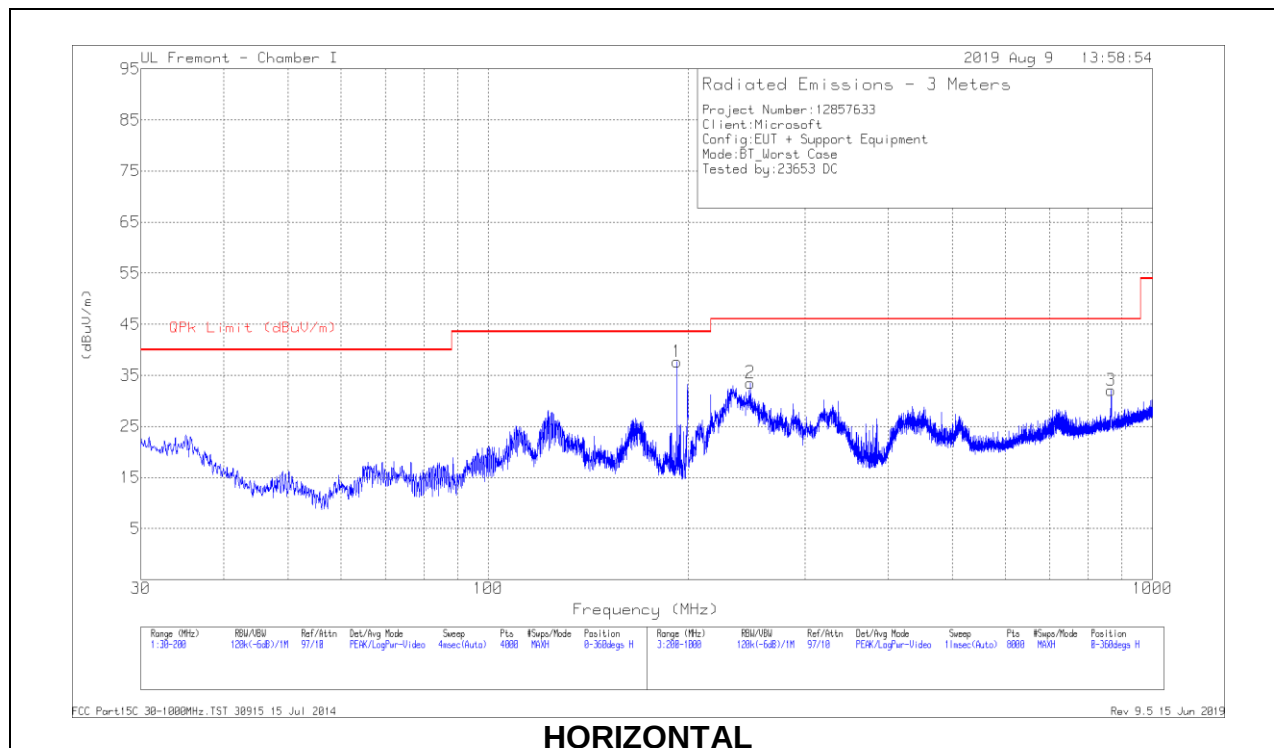

## Below 1GHz Data

| Marker | Frequency (MHz) | Meter Reading (dBuV) | Det | AF PRE0184971 (dB/m) | Amp Cbl (dB) | Corrected Reading (dBuV/m) | QPk Limit (dBuV/m) | Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------------|--------------|----------------------------|--------------------|-------------|----------------|-------------|----------|
| 1      | 192.3495        | 50.83                | Pk  | 17.1                 | -30.3        | 37.63                      | 43.52              | -5.89       | 0-360          | 102         | H        |
|        | 192.3572        | 50.96                | Qp  | 17.1                 | -30.3        | 37.76                      | 43.52              | -5.76       | 188            | 115         | H        |
| 4      | 192.3495        | 43.13                | Pk  | 17.1                 | -30.3        | 29.93                      | 43.52              | -13.59      | 0-360          | 101         | V        |
| 2      | * 248.1063      | 46.03                | Pk  | 17.5                 | -30          | 33.53                      | 46.02              | -12.49      | 0-360          | 101         | H        |
| 3      | 866.3866        | 31.87                | Pk  | 27.7                 | -27.5        | 32.07                      | 46.02              | -13.95      | 0-360          | 200         | H        |
| 5      | 238.205         | 42.85                | Pk  | 17.5                 | -30.1        | 30.25                      | 46.02              | -15.77      | 0-360          | 199         | V        |
| 6      | 865.8866        | 32.5                 | Pk  | 27.7                 | -27.5        | 32.7                       | 46.02              | -13.32      | 0-360          | 199         | V        |

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

Qp - Quasi-Peak detector



## 18 – 26GHz DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF PRE018218 8 (dB/m) | Amp/Cbl (dB) | Dist Corr (dB) | Corrected Reading (dBuVolts) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) |
|--------|-----------------|----------------------|-----|-----------------------|--------------|----------------|------------------------------|--------------------|-------------|---------------------|----------------|
| 1      | 18.59111        | 71.84                | Pk  | 33                    | -59          | -9.5           | 36.34                        | 54                 | -17.66      | 74                  | -37.66         |
| 2      | 19.904          | 69.66                | Pk  | 33.4                  | -57.2        | -9.5           | 36.36                        | 54                 | -17.64      | 74                  | -37.64         |
| 3      | 20.15822        | 69.87                | Pk  | 33.4                  | -57          | -9.5           | 36.77                        | 54                 | -17.23      | 74                  | -37.23         |
| 4      | 18.62222        | 71.52                | Pk  | 32.9                  | -58.8        | -9.5           | 36.12                        | 54                 | -17.88      | 74                  | -37.88         |
| 5      | 20.73689        | 69.98                | Pk  | 33.4                  | -56.8        | -9.5           | 37.08                        | 54                 | -16.92      | 74                  | -36.92         |
| 6      | 24.80622        | 69.18                | Pk  | 34.9                  | -55.5        | -9.5           | 39.08                        | 54                 | -14.92      | 74                  | -34.92         |

Pk - Peak detector

## 10. AC POWER LINE CONDUCTED EMISSIONS

### LIMITS

FCC §15.207 (a)

RSS-Gen 8.8

| Frequency of Emission (MHz) | Conducted Limit (dBuV) |            |
|-----------------------------|------------------------|------------|
|                             | Quasi-peak             | Average    |
| 0.15-0.5                    | 66 to 56 *             | 56 to 46 * |
| 0.5-5                       | 56                     | 46         |
| 5-30                        | 60                     | 50         |

\* Decreases with the logarithm of the frequency.

### TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

### RESULTS

## 10.1.1. AC Power Line Norm

### LINE 1 RESULTS

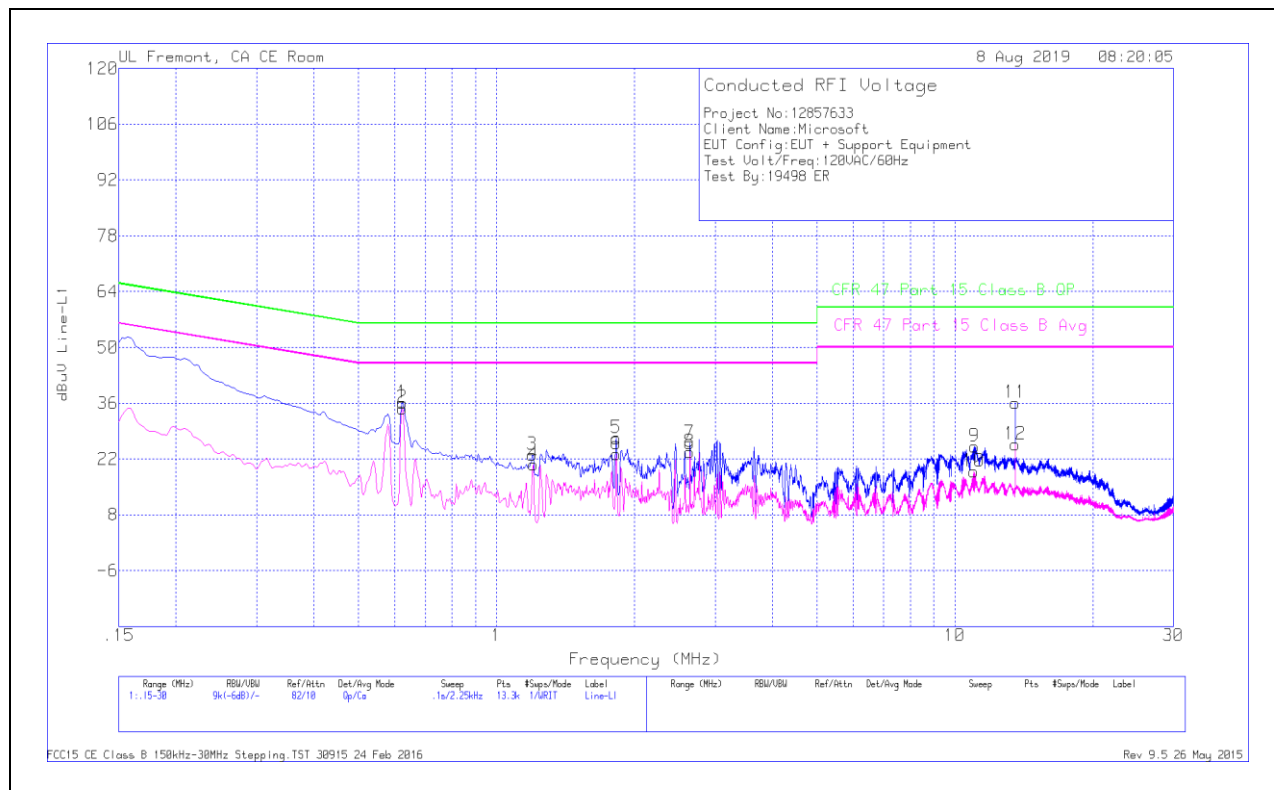


| Range 1: Line-L1 .15 - 30MHz |                 |                      |     |         |                 |              |                        |                           |                |                            |                      |
|------------------------------|-----------------|----------------------|-----|---------|-----------------|--------------|------------------------|---------------------------|----------------|----------------------------|----------------------|
| Marker                       | Frequency (MHz) | Meter Reading (dBuV) | Det | LISN L1 | LC Cables C1&C3 | Limiter (dB) | Corrected Reading dBuV | CFR 47 Part 15 Class B QP | QP Margin (dB) | CFR 47 Part 15 Class B Avg | Av(CISPR)Margin (dB) |
| 1                            | .6225           | 26.03                | Qp  | 0       | 0               | 10.1         | 36.13                  | 56                        | -19.87         | -                          | -                    |
| 2                            | .6225           | 24.69                | Ca  | 0       | 0               | 10.1         | 34.79                  | -                         | -              | 46                         | -11.21               |
| 3                            | 1.1985          | 12.81                | Qp  | 0       | .1              | 10.1         | 23.01                  | 56                        | -32.99         | -                          | -                    |
| 4                            | 1.203           | 10.45                | Ca  | 0       | .1              | 10.1         | 20.65                  | -                         | -              | 46                         | -25.35               |
| 5                            | 1.824           | 17.1                 | Qp  | 0       | .1              | 10.1         | 27.3                   | 56                        | -28.7          | -                          | -                    |
| 6                            | 1.82625         | 13.08                | Ca  | 0       | .1              | 10.1         | 23.28                  | -                         | -              | 46                         | -22.72               |
| 7                            | 2.643           | 15.76                | Qp  | 0       | .1              | 10.1         | 25.96                  | 56                        | -30.04         | -                          | -                    |
| 8                            | 2.643           | 13.61                | Ca  | 0       | .1              | 10.1         | 23.81                  | -                         | -              | 46                         | -22.19               |
| 9                            | 11.0557         | 14.65                | Qp  | .1      | .2              | 10.2         | 25.15                  | 60                        | -34.85         | -                          | -                    |
| 10                           | 11.004          | 8.4                  | Ca  | .1      | .2              | 10.2         | 18.9                   | -                         | -              | 50                         | -31.1                |
| 11                           | 13.56           | 25.58                | Qp  | .1      | .2              | 10.2         | 36.08                  | 60                        | -23.92         | -                          | -                    |
| 12                           | 13.56           | 15.2                 | Ca  | .1      | .2              | 10.2         | 25.7                   | -                         | -              | 50                         | -24.3                |

Qp - Quasi-Peak detector

Ca - CISPR average detection

NOTE: Markers 11 and 12, 13.56MHz is an external NFC signal unrelated to the EUT.

## LINE 2 RESULTS

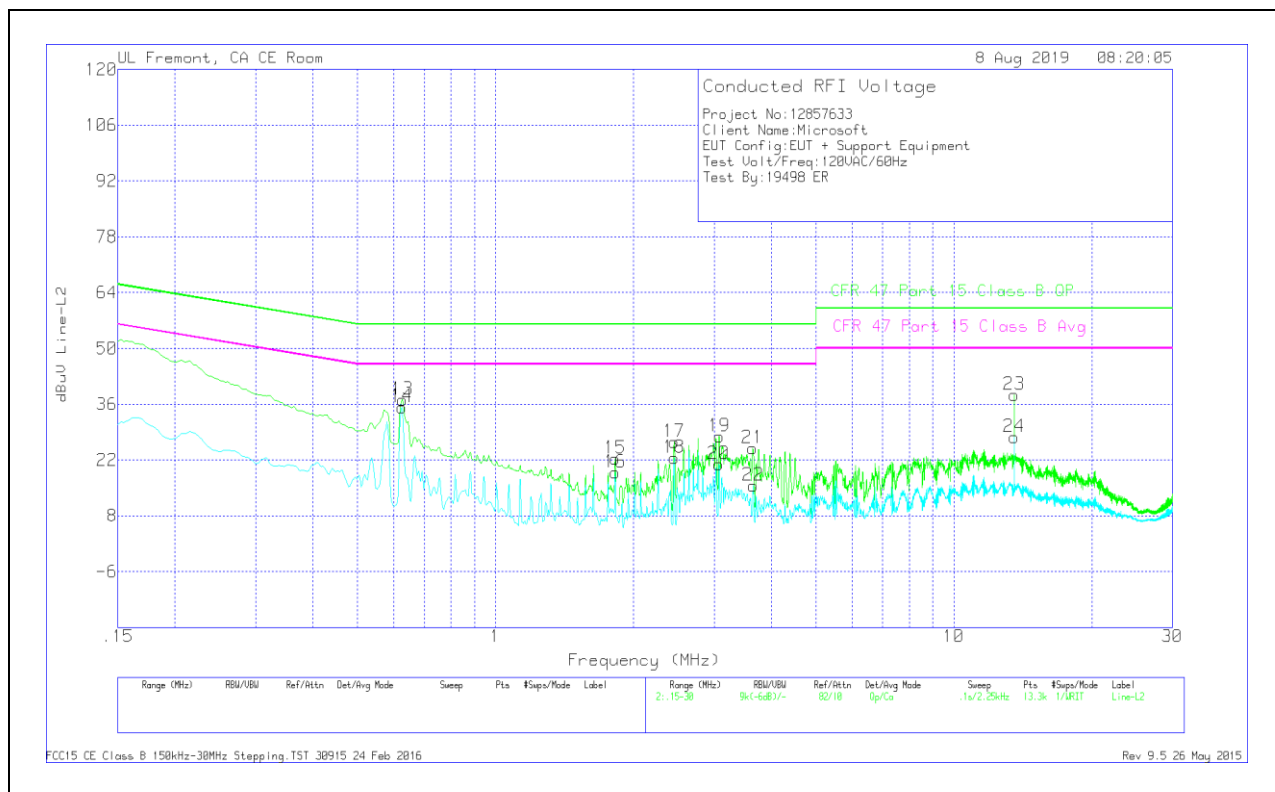

| Range 2: Line-L2 .15 - 30MHz |                 |                      |     |         |                 |              |                        |                           |                |                            |                      |
|------------------------------|-----------------|----------------------|-----|---------|-----------------|--------------|------------------------|---------------------------|----------------|----------------------------|----------------------|
| Marker                       | Frequency (MHz) | Meter Reading (dBuV) | Det | LISN L2 | LC Cables C2&C3 | Limiter (dB) | Corrected Reading dBuV | CFR 47 Part 15 Class B QP | QP Margin (dB) | CFR 47 Part 15 Class B Avg | Av(CISPR)Margin (dB) |
| 13                           | .627            | 27.11                | Qp  | 0       | 0               | 10.1         | 37.21                  | 56                        | -18.79         | -                          | -                    |
| 14                           | .62475          | 25.21                | Ca  | 0       | 0               | 10.1         | 35.31                  | -                         | -              | 46                         | -10.69               |
| 15                           | 1.824           | 12.09                | Qp  | 0       | .1              | 10.1         | 22.29                  | 56                        | -33.71         | -                          | -                    |
| 16                           | 1.824           | 8.61                 | Ca  | 0       | .1              | 10.1         | 18.81                  | -                         | -              | 46                         | -27.19               |
| 17                           | 2.45175         | 16.35                | Qp  | 0       | .1              | 10.1         | 26.55                  | 56                        | -29.45         | -                          | -                    |
| 18                           | 2.45175         | 12.38                | Ca  | 0       | .1              | 10.1         | 22.58                  | -                         | -              | 46                         | -23.42               |
| 19                           | 3.07725         | 17.69                | Qp  | 0       | .1              | 10.1         | 27.89                  | 56                        | -28.11         | -                          | -                    |
| 20                           | 3.075           | 10.81                | Ca  | 0       | .1              | 10.1         | 21.01                  | -                         | -              | 46                         | -24.99               |
| 21                           | 3.63975         | 14.84                | Qp  | 0       | .1              | 10.1         | 25.04                  | 56                        | -30.96         | -                          | -                    |
| 22                           | 3.651           | 5.46                 | Ca  | 0       | .1              | 10.1         | 15.66                  | -                         | -              | 46                         | -30.34               |
| 23                           | 13.56           | 27.82                | Qp  | .1      | .2              | 10.2         | 38.32                  | 60                        | -21.68         | -                          | -                    |
| 24                           | 13.56           | 17.31                | Ca  | .1      | .2              | 10.2         | 27.81                  | -                         | -              | 50                         | -22.19               |

Qp - Quasi-Peak detector

Ca - CISPR average detection

NOTE: Markers 23 and 24, 13.56MHz is an external NFC signal unrelated to the EUT.