



MEASUREMENT REPORT FCC PART 15.247 WLAN OFDMA

Applicant Name:
Microsoft Corporation
One Microsoft Way
Redmond, WA 98052
United States


Date of Testing:
05/20/2021 - 09/08/2021
Test Site/Location:
PCTEST Lab. Columbia, MD USA
Test Report Serial No.:
1M2105060048-13.C3K

FCC ID:	C3K1995
IC:	3048A-1995
APPLICANT:	Microsoft Corporation

Application Type: Certification
Model/HVIN: 1995
EUT Type: Portable Handset
Frequency Range: 2412 – 2472MHz
Modulation Type: CCK/DSSS/OFDMA
FCC Classification: Digital Transmission System (DTS)
FCC Rule Part(s): Part 15 Subpart C (15.247)
ISED Specification: RSS-247 Issue 2
Test Procedure(s): ANSI C63.10-2013, KDB 558074 D01 v05r02,
KDB 662911 D01 v02r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 558074 D01 v05r02. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.




Randy Ortega
President




FCC ID: C3K1995 IC: 3048A-1995	 PCTEST [®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 Microsoft	Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 1 of 202


T A B L E O F C O N T E N T S

1.0	INTRODUCTION	4
1.1	Scope.....	4
1.2	PCTEST Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Test Configuration.....	8
2.4	Antenna Description.....	8
2.5	Software and Firmware	8
2.6	EMI Suppression Device(s)/Modifications.....	8
3.0	DESCRIPTION OF TESTS	9
3.1	Evaluation Procedure	9
3.2	Radiated Emissions.....	9
3.3	Environmental Conditions.....	9
4.0	ANTENNA REQUIREMENTS	10
5.0	MEASUREMENT UNCERTAINTY	11
6.0	TEST EQUIPMENT CALIBRATION DATA.....	12
7.0	TEST RESULTS	13
7.1	Summary.....	13
7.2	6dB Bandwidth Measurement	14
7.3	Output Power Measurement.....	30
7.4	Power Spectral Density	50
7.5	Conducted Emissions at the Band Edge	82
7.6	Conducted Spurious Emissions.....	107
7.7	Radiated Spurious Emission Measurements – Above 1 GHz	133
7.7.1	SISO SOUTH Radiated Spurious Emission Measurements	136
7.7.2	SISO NORTH Radiated Spurious Emission Measurements	146
7.7.3	MIMO Radiated Spurious Emission Measurements	156
7.7.4	SISO SOUTH Radiated Restricted Band Edge Measurements 20MHz	166
7.7.5	SISO SOUTH Radiated Restricted Band Edge Measurements 40MHz	173
7.7.6	SISO NORTH Radiated Restricted Band Edge Measurements 20MHz	178
7.7.7	SISO NORTH Radiated Restricted Band Edge Measurements 40MHz.....	185
7.7.8	MIMO Radiated Restricted Band Edge Measurements 20MHz	190
7.7.9	MIMO Radiated Restricted Band Edge Measurements 40MHz	197
8.0	CONCLUSION	202

FCC ID: C3K1995 IC: 3048A-1995	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Microsoft	Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 2 of 202



MEASUREMENT REPORT



Mode	Tones	Tx Frequency [MHz]	SOUTH				NORTH				MIMO			
			Avg Conducted		Peak Conducted		Avg Conducted		Peak Conducted		Avg Conducted		Peak Conducted	
			Max. Power (mW)	Max. Power (dBm)										
802.11ax OFDMA	26T	2412 - 2472	35.318	15.48	240.436	23.81	35.400	15.49	244.906	23.89	69.823	18.44	539.511	27.32
802.11ax OFDMA	52T	2412 - 2472	44.566	16.49	313.329	24.96	44.566	16.49	295.801	24.71	88.716	19.48	619.441	27.92
802.11ax OFDMA	106T	2412 - 2472	55.976	17.48	334.965	25.25	56.105	17.49	335.738	25.26	110.917	20.45	648.634	28.12
802.11ax OFDMA	242T	2412 - 2472	55.719	17.46	320.627	25.06	55.847	17.47	306.196	24.86	109.901	20.41	603.949	27.81
802.11ax OFDMA	484T	2412 - 2472	34.914	15.43	196.789	22.94	34.198	15.34	206.538	23.15	68.549	18.36	388.150	25.89

EUT Overview

FCC ID: C3K1995 IC: 3048A-1995	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Microsoft	Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 3 of 202

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

FCC ID: C3K1995 IC: 3048A-1995	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 4 of 202

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Microsoft Corporation Portable Handset FCC ID: C3K1995 IC: 3048A-1995**. The test data contained in this report pertains only to the emissions due to the EUT's WLAN (DTS) transmitter.

Test Device Serial No.: 47888, 46047, 48944, 46245

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS, 850/1900 WCDMA/HSPA, Multi-band LTE, Multi-band 5G NR, 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII (5GHz), Bluetooth (1x, EDR, LE), NFC

Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	12	2467
6	2437	13	2472
7	2442		

Table 2-1. Frequency/ Channel Operations

Note: The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section 6.0 b) of ANSI C63.10-2013 and KDB 558074 D01 v05r02. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

FCC ID: C3K1995 IC: 3048A-1995	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 5 of 202

Mode	Antenna	Tones	Duty Cycle
802.11ax DTS RU	1	26T	99.5
		52T	99.6
		106T	99.5
		242T	99.6
	2	26T	99.4
		52T	99.5
		106T	99.5
		242T	99.5
	MIMO SDM	26T	99.6
		52T	98.9
		106T	99.3
		242T	99.5

Table 2-2. Measured Duty Cycles

The device employs MIMO technology. Below are the possible configurations.

WiFi Configurations	SISO		SDM		CDD	
	SOUTH	NORTH	SOUTH	NORTH	SOUTH	NORTH
2.4GHz	11ax	✓	✓	✓	✓	✓

Table 2-3. Frequency / Channel Operations

✓ = Support ; ✗ = NOT Support

SISO = Single Input Single Output

SDM = Spatial Diversity Multiplexing – MIMO function

CDD = Cyclic Delay Diversity - 2Tx Function

This device supports simultaneous transmission operation, which allows for two SISO channels to operate independent of one another in the 2.4GHz and 5GHz bands simultaneously on each antenna. The following tables show the worst case configurations determined during testing. The data for these configurations is contained in the UNII test report.

Configuration 1: SOUTH transmitting in 2.4GHz mode and NORTH in 5GHz mode

Description	2.4 GHz Emission	5 GHz Emission
Antenna	1	2
Channel	1	120
Operating Frequency (MHz)	2412	5600
Data Rate (Mbps)	1	6
Mode	b	a

Table 2-4. Config-1 (5GHz NORTH & 2.4GHz SOUTH)

FCC ID: C3K1995 IC: 3048A-1995	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Microsoft	Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 6 of 202

Configuration 2: SOUTH transmitting in 5GHz mode and NORTH in 2.4GHz mode

Description	2.4 GHz Emission	5 GHz Emission
Antenna	2	1
Channel	1	120
Operating Frequency (MHz)	2412	5600
Data Rate (Mbps)	1	6
Mode	b	a

Table 2-5. Config-2 (5GHz SOUTH & 2.4GHz NORTH)

Configuration 3: SOUTH and NORTH both transmitting in 2.4GHz and 5GHz modes simultaneously

Description	2.4 GHz Emission	5 GHz Emission
Antenna	1, 2	1, 2
Channel	6	120
Operating Frequency (MHz)	2437	5600
Data Rate (Mbps)	1	6
Mode	b	a

Table 2-6. Config-3 (2.4GHz MIMO & 5GHz MIMO)

Configuration 4: SOUTH transmitting BT, NORTH transmitting 2.4GHz, and 5GHz transmitting MIMO simultaneously

Description	BT transmission	2.4 GHz Emission	5 GHz Emission
Antenna	1	2	1, 2
Channel	78	1	100
Operating Frequency (MHz)	2480	2412	5500
Data Rate (Mbps)	1	6	6
Mode	GFSK	g	a

Table 2-7. Config-4 (BT SOUTH, 2.4GHz NORTH, 5GHz MIMO)

Configuration 5: NORTH transmitting BT, SOUTH transmitting 2.4GHz, and 5GHz transmitting MIMO simultaneously

Description	BT transmission	2.4 GHz Emission	5 GHz Emission
Antenna	2	1	1, 2
Channel	78	1	100
Operating Frequency (MHz)	2480	2412	5500
Data Rate (Mbps)	1	6	6
Mode	GFSK	g	a

Table 2-8. Config-5 (BT NORTH, 2.4GHz SOUTH, 5GHz MIMO)

FCC ID: C3K1995 IC: 3048A-1995	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Microsoft	Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 7 of 202

2.3 Test Configuration

The EUT was tested per the guidance of KDB 558074 D01 v05r02. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing. See Section 7.7 for radiated emissions test setups, and 7.2, 7.3, 7.4, 7.5, and 7.6 for antenna port conducted emissions test setups.

This device supports open and closed configurations. Multiple angles are tested and the worst case radiated emissions data is shown in the report.

2.4 Antenna Description

Following antenna was used for the testing.

Frequency [GHz]	SOUTH Antenna Gain [dBi]	NORTH Antenna Gain [dBi]
2.4	0.3	-3.2

Table 2-9. Antenna Peak Gain

2.5 Software and Firmware

The test was conducted with firmware version 2021.509.3 installed on the EUT.

2.6 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: C3K1995 IC: 3048A-1995	 PCTEST [®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset	Page 8 of 202

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 558074 D01 v05r02 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.

3.3 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: C3K1995 IC: 3048A-1995	 PCTEST[®] Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	 Microsoft	Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset			Page 9 of 202

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connections to an external antenna.

Conclusion:

The EUT unit complies with the requirement of §15.203.

FCC ID: C3K1995 IC: 3048A-1995	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Microsoft	Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 10 of 202

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.13
Line Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: C3K1995 IC: 3048A-1995	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 11 of 202

6.0 TEST EQUIPMENT CALIBRATION DATA


Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	WL25-1	Conducted Cable Set (25GHz)	2/23/2021	Annual	2/23/2022	WL25-1
-	WL40-1	WLAN Cable Set (40GHz)	2/23/2021	Annual	2/23/2022	WL40-1
-	WL25-2	WLAN Cable Set (25GHz)	2/23/2021	Annual	2/23/2022	WL25-2
-	WL25-3	Conducted Cable Set (25GHz)	3/12/2021	Annual	3/12/2022	WL25-3
-	WL40-2	WLAN Cable Set (40GHz)	3/12/2021	Annual	3/12/2022	WL40-2
Anritsu	ML2495A	Power Meter	1/18/2021	Annual	1/18/2022	941001
Anritsu	MA2411B	Pulse Power Sensor	2/5/2021	Annual	2/5/2022	846215
Anritsu	MS46322A	Vector Network Analyzer	11/6/2020	Annual	11/6/2021	1521001
Anritsu	36585K-2F	Precision Autocal 2-Port	10/24/2020	Annual	10/24/2021	1628014
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	10/10/2019	Biennial	10/10/2021	121034
Emco	3115	Horn Antenna (1-18GHz)	6/18/2020	Biennial	6/18/2022	9704-5182
Emco	3116	Horn Antenna (18 - 40GHz)	7/20/2021	Biennial	7/20/2023	9203-2178
ETS-Lindgren	3816/2NM	LISN	7/9/2020	Biennial	7/9/2022	114451
ETS-Lindgren	3115	Double Ridged Guide Horn 750MHz - 18GHz	3/12/2020	Biennial	3/12/2022	150693
Keysight Technologies	N9020A	MXA Signal Analyzer	8/14/2020	Annual	8/14/2021	US46470561
Keysight Technologies	N9038A	MXE EMI Receiver	8/11/2020	Annual	8/11/2021	MY51210133
Keysight Technologies	N9030A	PXA Signal Analyzer (44GHz)	8/17/2020	Annual	8/17/2021	MY52350166
Keysight Technologies	N9020A	MXA Signal Analyzer	9/22/2020	Annual	9/22/2021	MY54500644
Pasternack	NMLC-2	Line Conducted Emissions Cable (NM)	2/25/2021	Annual	2/25/2022	NMLC-2
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	8/3/2021	Annual	8/3/2022	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	5/25/2021	Annual	5/25/2022	100348
Rohde & Schwarz	FSW67	Signal / Spectrum Analyzer	8/10/2020	Annual	8/10/2021	103200
Solar Electronics	8012-50-R-24-BNC	Line Impedance Stabilization Network	10/1/2019	Biennial	10/1/2021	310233
Sunol	DRH-118	Horn Antenna (1-18 GHz)	8/27/2019	Biennial	8/27/2021	A042511
Sunol Science	JB5	Bi-Log Antenna (30M - 5GHz)	7/27/2020	Biennial	7/27/2022	A051107

Table 6-1. Annual Test Equipment Calibration Schedule

Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: C3K1995 IC: 3048A-1995	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Microsoft	Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 12 of 202

7.0 TEST RESULTS

7.1 Summary

Company Name: Microsoft Corporation
 FCC ID: C3K1995
 IC: 3048A-1995
 FCC Classification: Digital Transmission System (DTS)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	RSS-247 [5.2]	6dB Bandwidth	> 500kHz	CONDUCTED	PASS	Section 7.2
15.247(b)(3)	RSS-247 [5.4]	Transmitter Output Power	< 1 Watt		PASS	Sections 7.3
15.247(e)	RSS-247 [5.2]	Transmitter Power Spectral Density	< 8dBm / 3kHz Band		PASS	Section 7.4
15.247(d)	RSS-247 [5.5]	Band Edge / Out-of-Band Emissions	≥ 20dBc		PASS	Sections 7.5, 7.6
15.205 15.209	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9])	RADIATED	PASS	Section 7.7

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "WLAN Automation," Version 3.5.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "Chamber Automation," Version 1.3.1.
- 6) 802.11ax OFDMA testing was performed for all signal tone configurations as specified by the 802.11ax standard. Worst case results are determined and reported per the guidance provided at the October 2018 TCB Workshop.

FCC ID: C3K1995 IC: 3048A-1995	 PCTEST [®] Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 13 of 202

7.2 6dB Bandwidth Measurement

§15.247(a.2); RSS-247 [5.2]

Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the transmitter antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

The minimum permissible 6dB bandwidth is 500 kHz.

Test Procedure Used

ANSI C63.10-2013 – Section 11.8.2 Option 2
 KDB 558074 D01 v05r02 – Section 8.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 6. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

FCC ID: C3K1995 IC: 3048A-1995	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Microsoft	Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 14 of 202

Test Notes


1. The 6dB bandwidth for each channel was measured with the RU index showing the highest conducted power.

FCC ID: C3K1995 IC: 3048A-1995	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 15 of 202

SISO SOUTH 6 dB Bandwidth Measurements



Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
2412	1	ax	26T	MCS0	17.12	0.500
2437	6	ax	26T	MCS0	2.139	0.500
2462	11	ax	26T	MCS0	2.721	0.500
2412	1	ax	242T	MCS0	19.01	0.500
2437	6	ax	242T	MCS0	19.11	0.500
2462	11	ax	242T	MCS0	19.07	0.500

Table 7-2. Conducted Bandwidth Measurements SISO SOUTH 20MHz BW

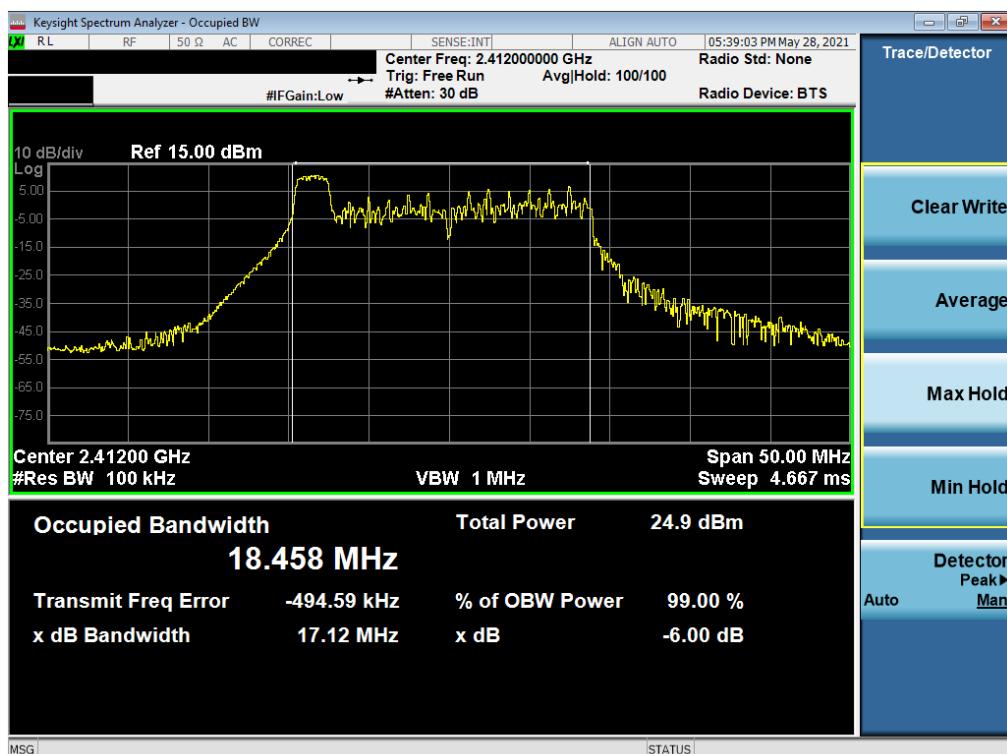


Plot 7-1. 6dB Bandwidth Plot SISO SOUTH (802.11ax 20MHz BW OFDMA – 26 Tones – Ch. 1)


FCC ID: C3K1995 IC: 3048A-1995	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Microsoft	Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 16 of 202

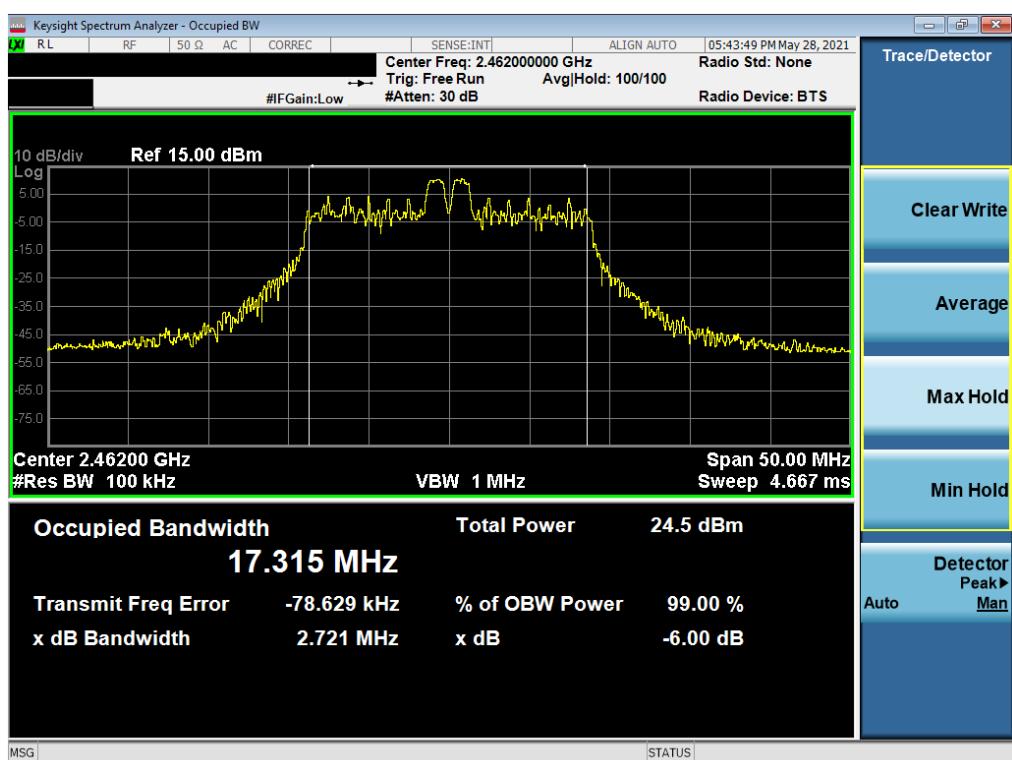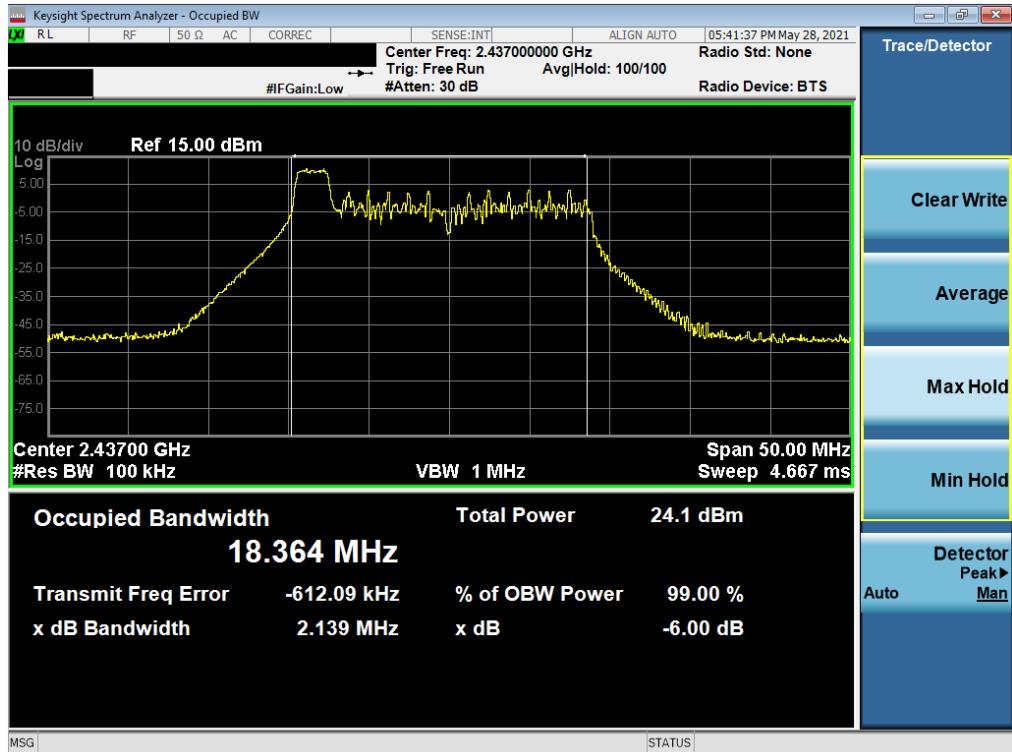

FCC ID: C3K1995 IC: 3048A-1995	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset	Page 17 of 202

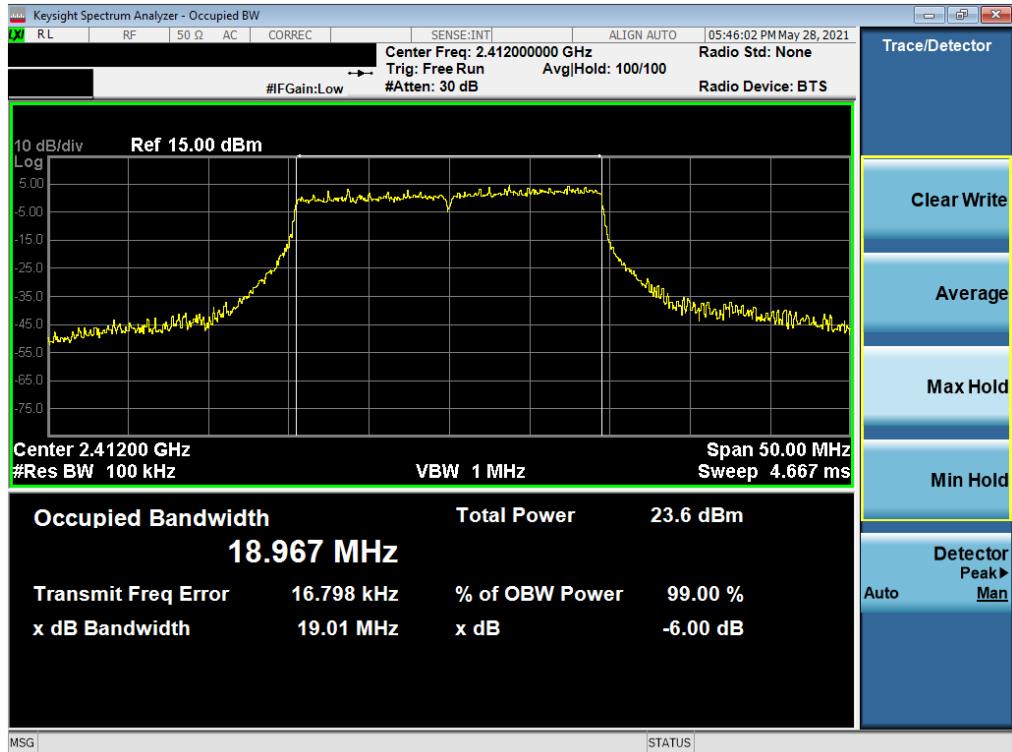


Plot 7-4. 6dB Bandwidth Plot SISO SOUTH (802.11ax 20MHz BW OFDMA – 242 Tones – Ch. 1)

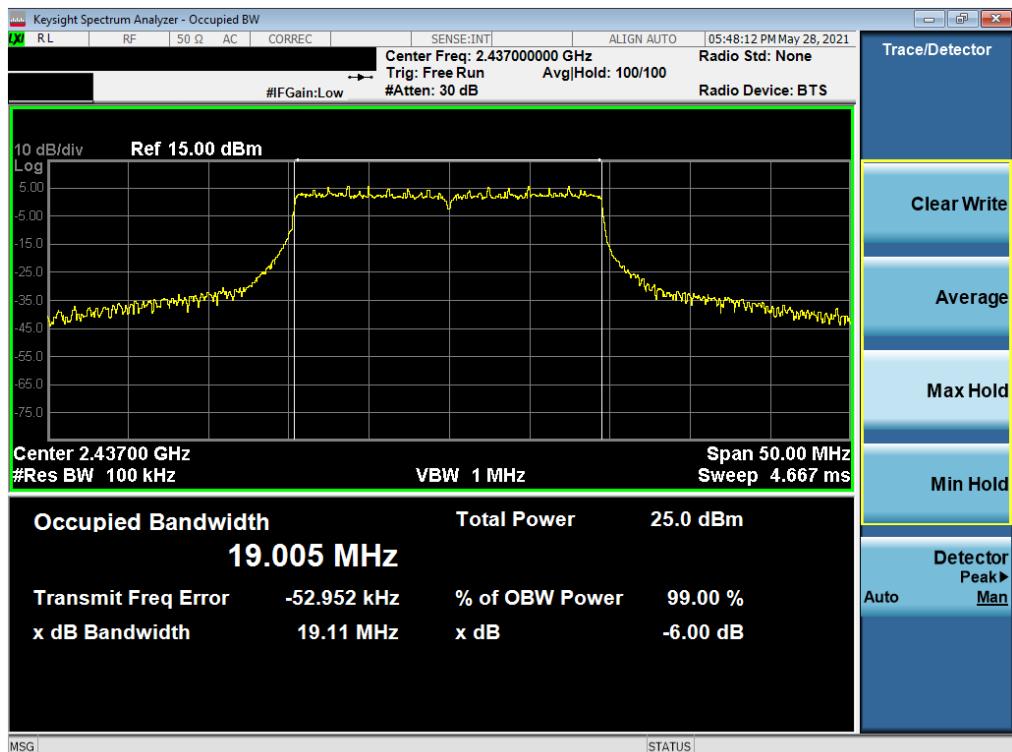

Plot 7-5. 6dB Bandwidth Plot SISO SOUTH (802.11ax 20MHz BW OFDMA – 242 Tones – Ch. 6)

FCC ID: C3K1995 IC: 3048A-1995	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset	Page 18 of 202

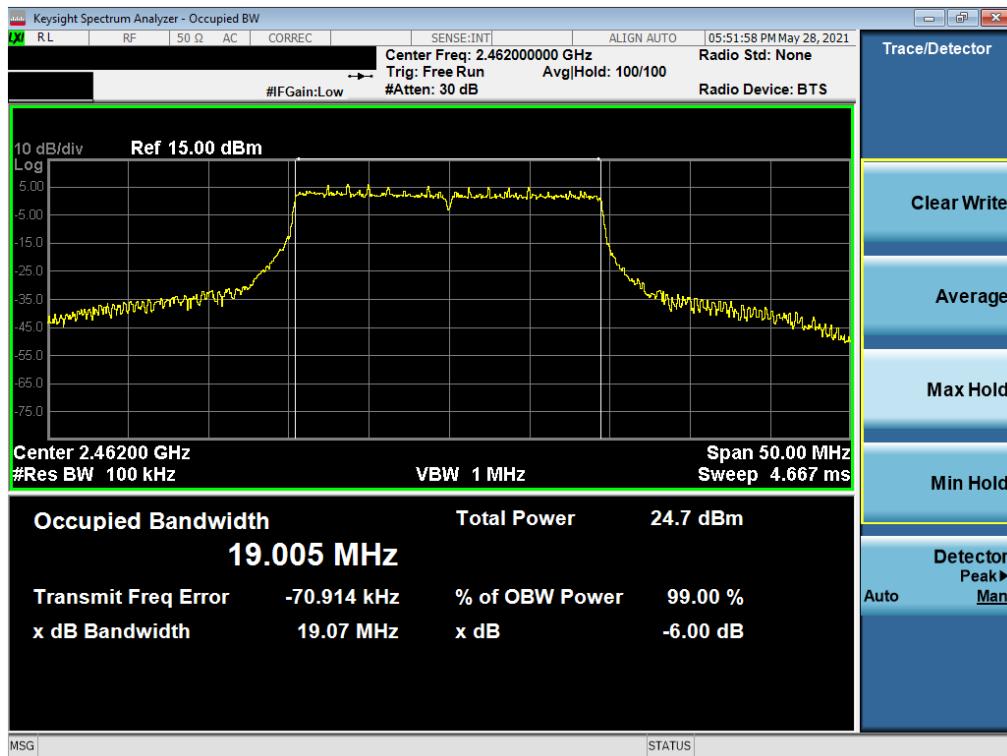


Plot 7-6. 6dB Bandwidth Plot SISO SOUTH (802.11ax 20MHz BW OFDMA – 242 Tones – Ch. 11)


Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
2422	3	ax	26T	MCS0	2.227	0.500
2442	7	ax	26T	MCS0	2.197	0.500
2462	11	ax	26T	MCS0	2.228	0.500
2422	3	ax	484T	MCS0	38.00	0.500
2442	7	ax	484T	MCS0	38.14	0.500
2462	11	ax	484T	MCS0	37.51	0.500

Table 7-3. Conducted Bandwidth Measurements SISO SOUTH 40MHz BW


FCC ID: C3K1995 IC: 3048A-1995	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 19 of 202


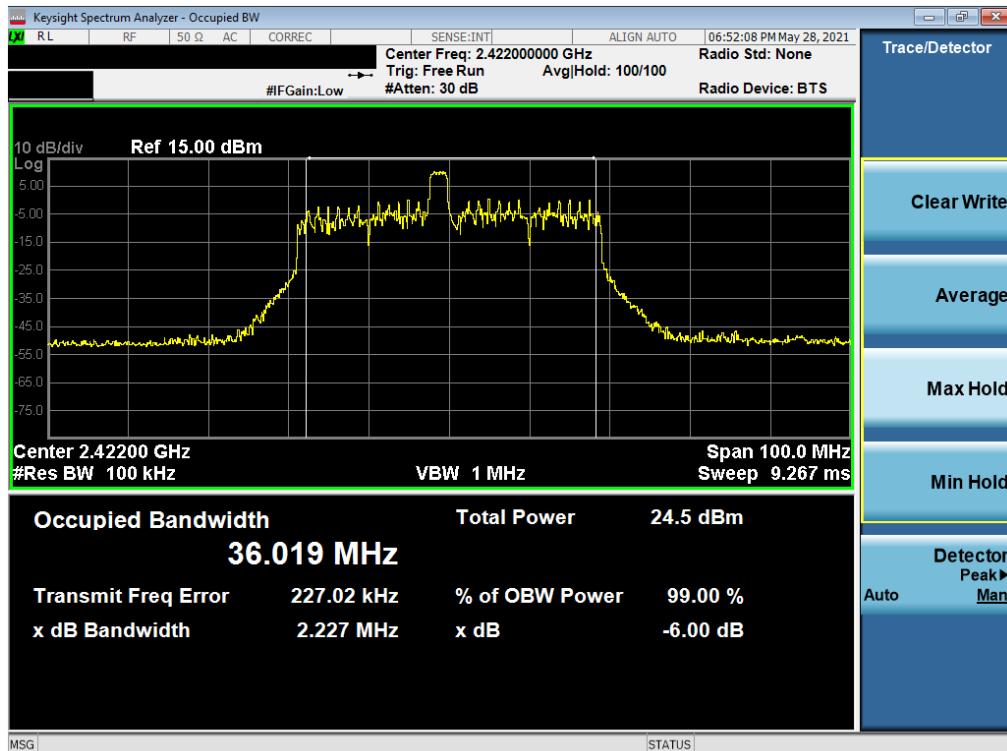


Plot 7-7. 6dB Bandwidth Plot SISO SOUTH (802.11ax 40MHz BW OFDMA – 26 Tones – Ch. 3)

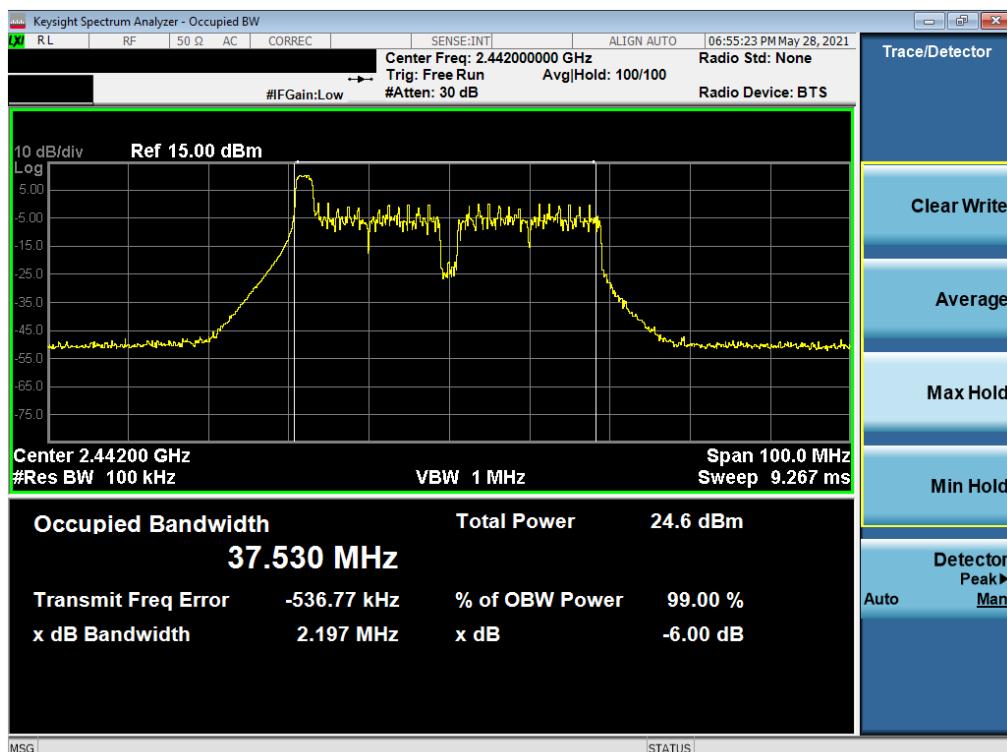


Plot 7-8. 6dB Bandwidth Plot SISO SOUTH (802.11ax 40MHz BW OFDMA – 26 Tones – Ch. 7)


FCC ID: C3K1995 IC: 3048A-1995	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 20 of 202

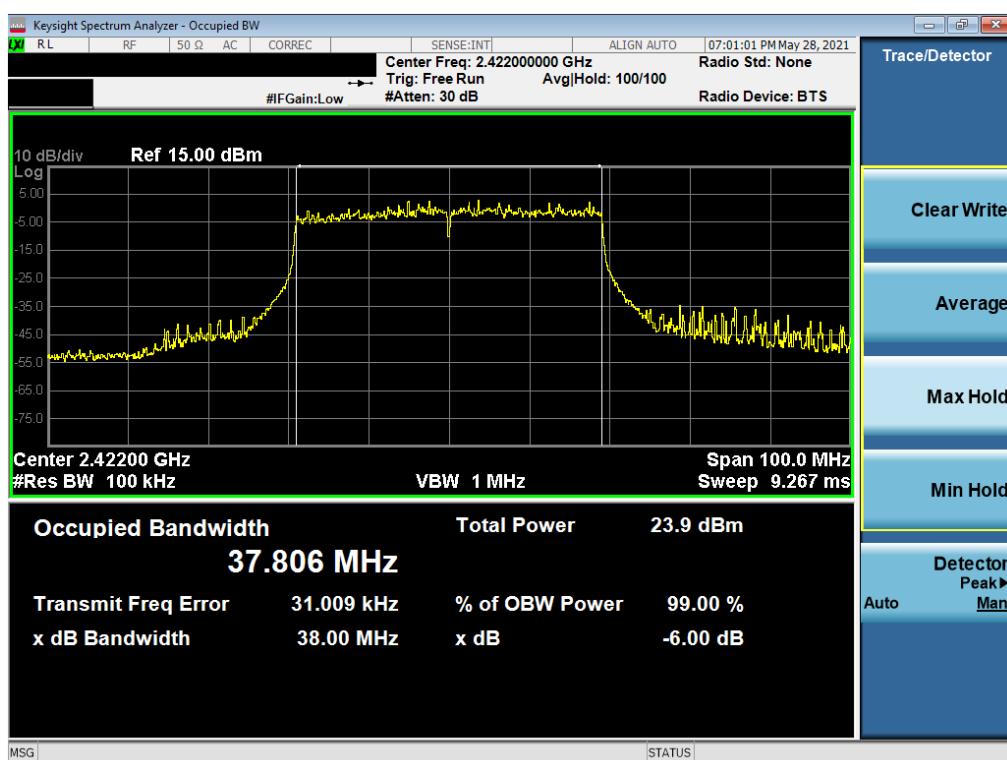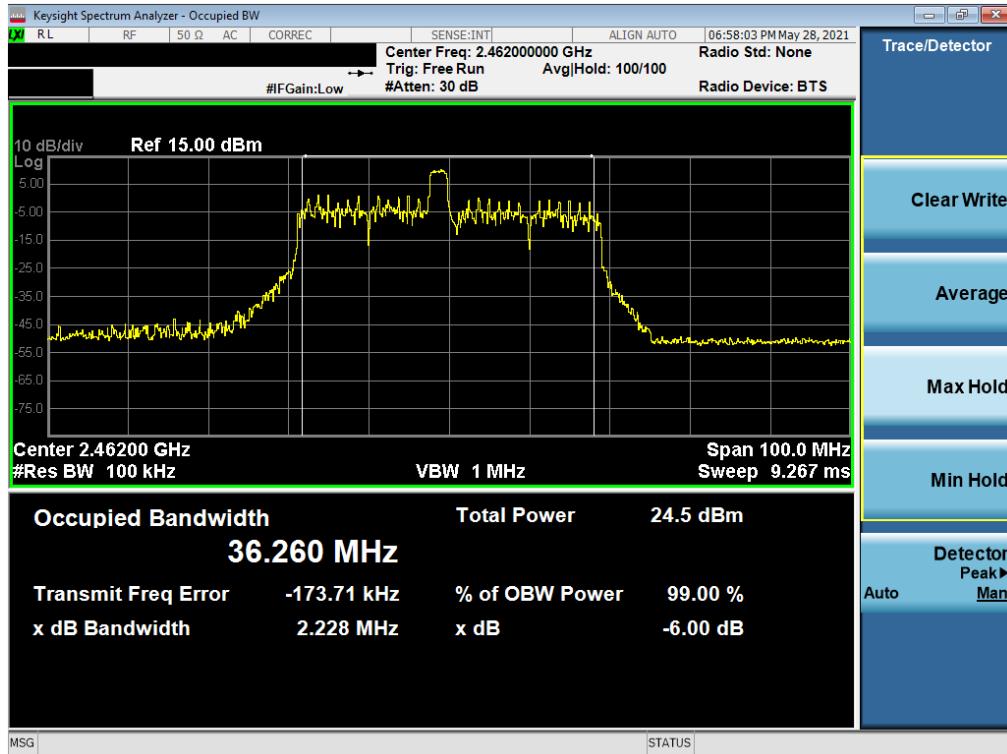

FCC ID: C3K1995 IC: 3048A-1995	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset	Page 21 of 202

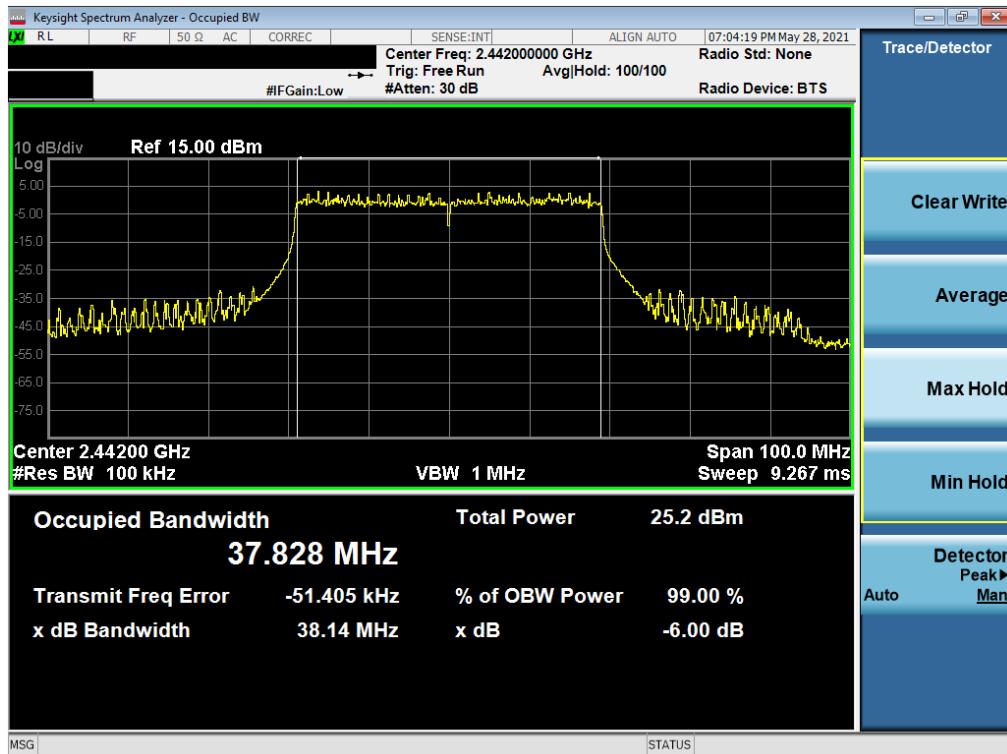

Plot 7-11. 6dB Bandwidth Plot SISO SOUTH (802.11ax 40MHz BW OFDMA – 484 Tones – Ch. 7)

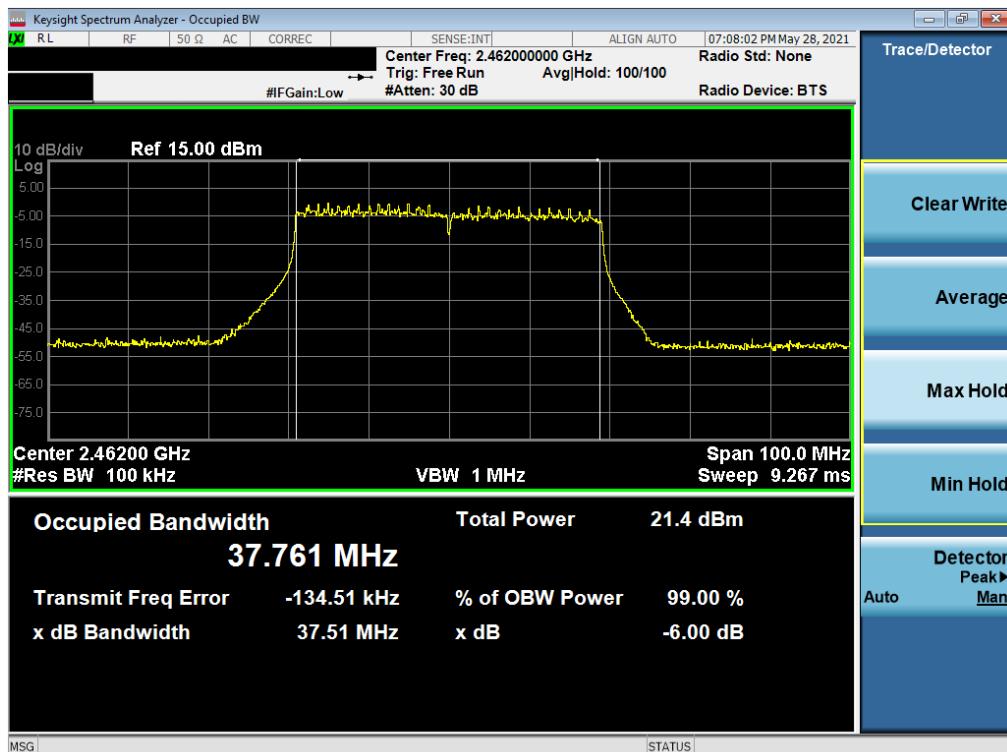


Plot 7-12. 6dB Bandwidth Plot SISO SOUTH (802.11ax 40MHz BW OFDMA – 484 Tones – Ch. 11)

FCC ID: C3K1995 IC: 3048A-1995	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset	Page 22 of 202


SISO NORTH 6 dB Bandwidth Measurements



Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
2412	1	ax	26T	MCS0	17.13	0.500
2437	6	ax	26T	MCS0	8.866	0.500
2462	11	ax	26T	MCS0	8.852	0.500
2412	1	ax	242T	MCS0	17.99	0.500
2437	6	ax	242T	MCS0	19.11	0.500
2462	11	ax	242T	MCS0	18.99	0.500

Table 7-4. Conducted Bandwidth Measurements SISO NORTH 20MHz


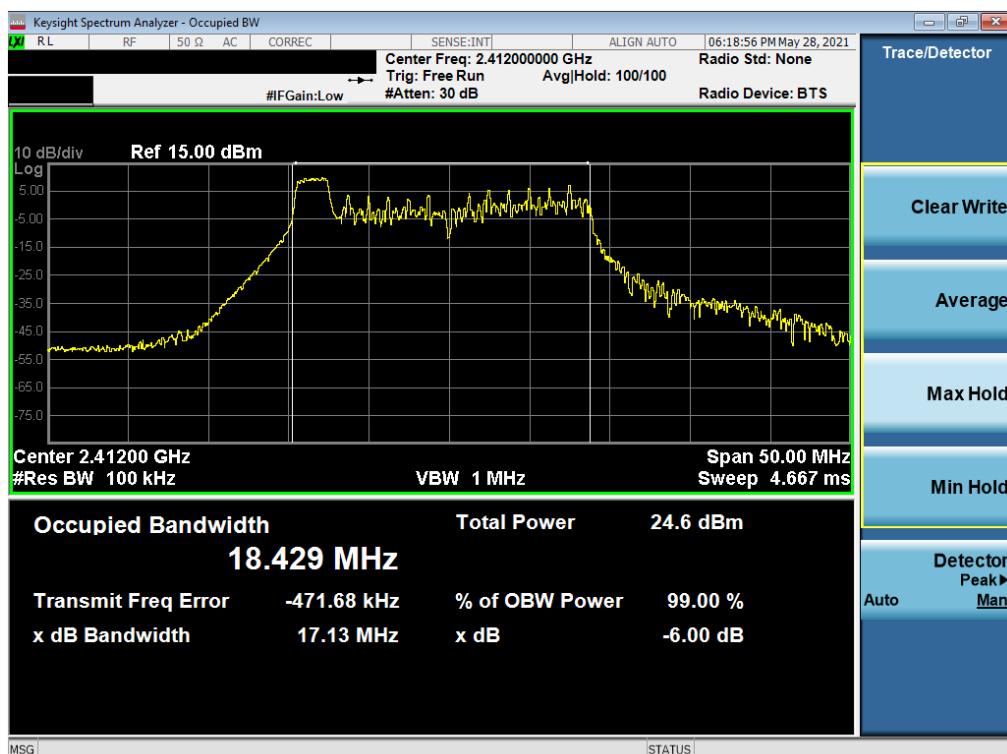


Plot 7-13. 6dB Bandwidth Plot SISO SOUTH (802.11ax 20MHz BW OFDMA – 26 Tones – Ch. 1)

FCC ID: C3K1995 IC: 3048A-1995	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Microsoft	Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 23 of 202

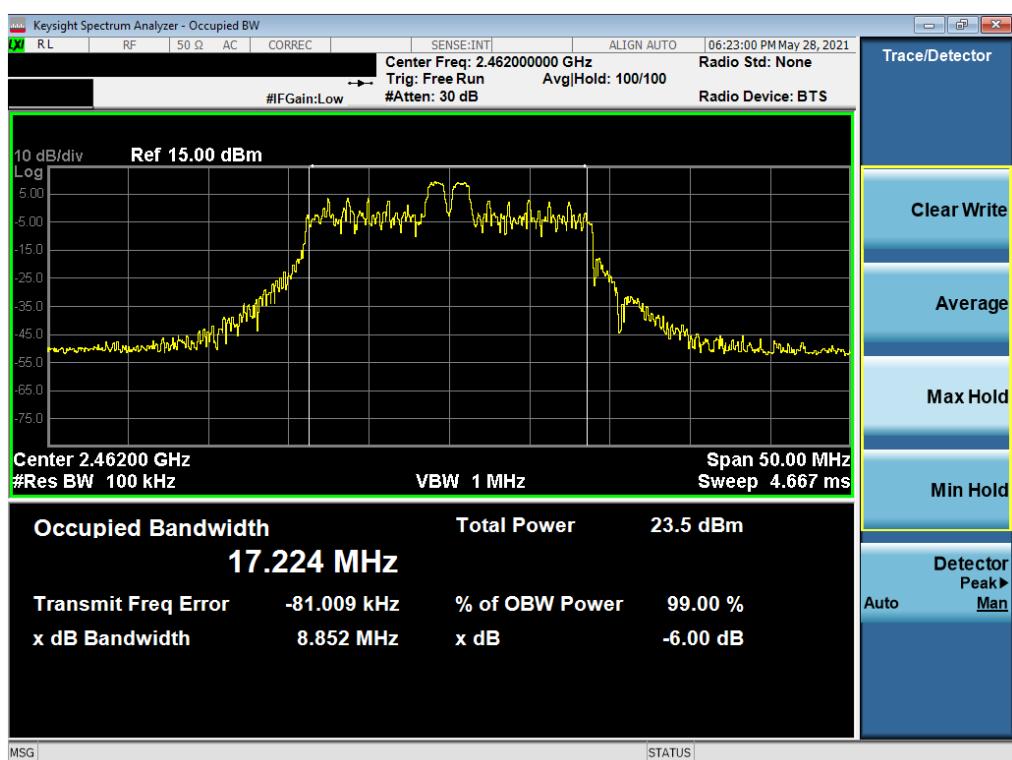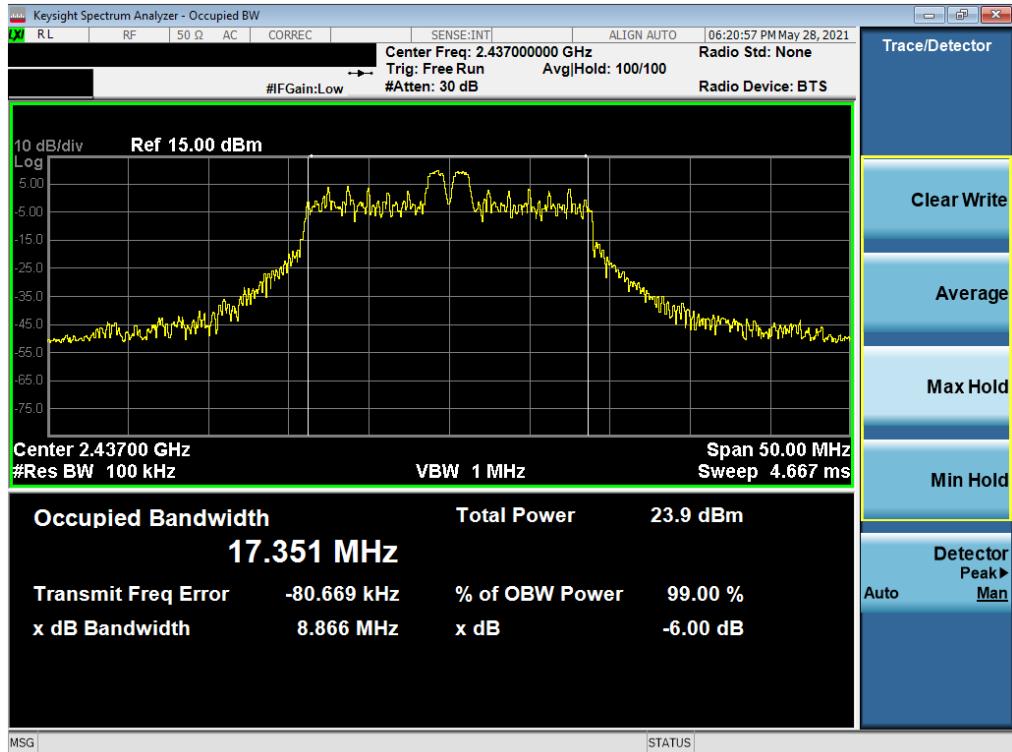

FCC ID: C3K1995 IC: 3048A-1995	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset	Page 24 of 202

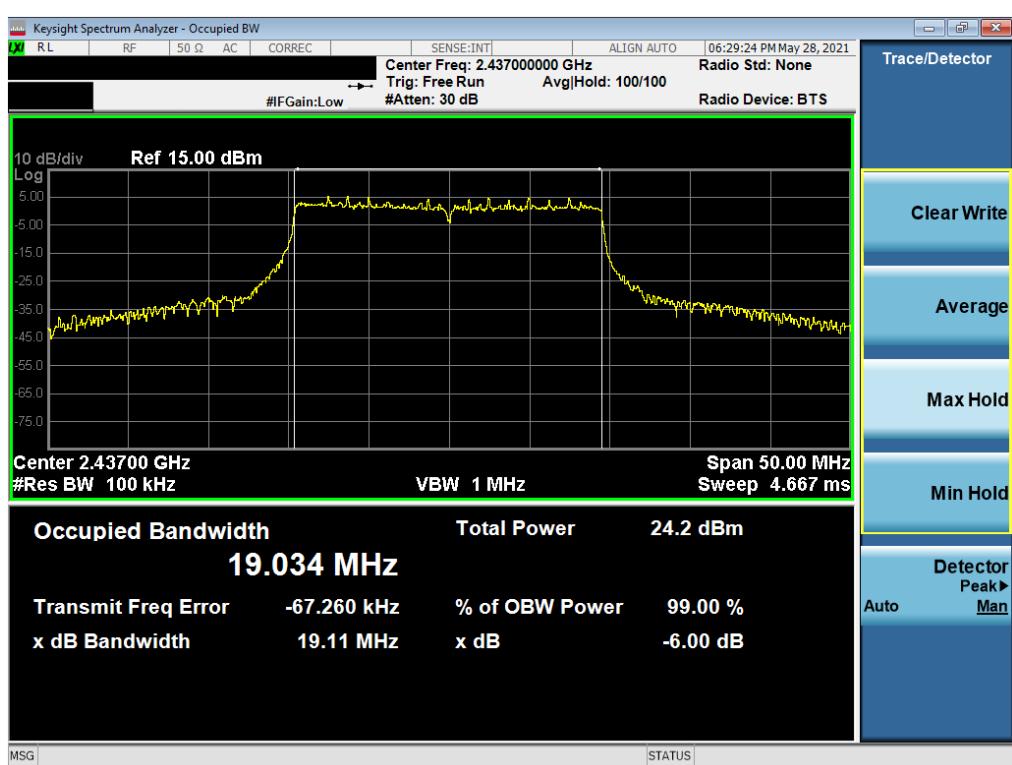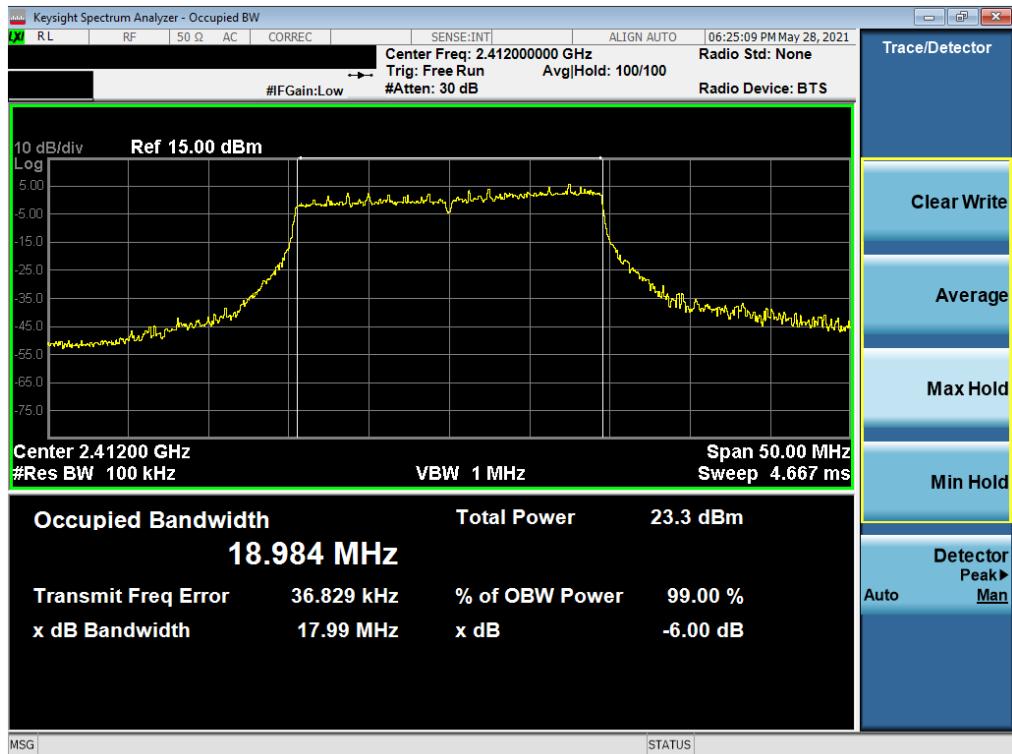

FCC ID: C3K1995 IC: 3048A-1995	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset	Page 25 of 202




Plot 7-18. 6dB Bandwidth Plot SISO SOUTH (802.11ax 20MHz BW OFDMA – 242 Tones – Ch. 11)


Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
2422	3	ax	26T	MCS0	24.140	0.500
2442	7	ax	26T	MCS0	2.192	0.500
2462	11	ax	26T	MCS0	2.192	0.500
2422	3	ax	484T	MCS0	36.66	0.500
2442	7	ax	484T	MCS0	38.07	0.500
2462	11	ax	484T	MCS0	36.69	0.500

Table 7-5. Conducted Bandwidth Measurements SISO NORTH 40MHz

FCC ID: C3K1995 IC: 3048A-1995	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 26 of 202

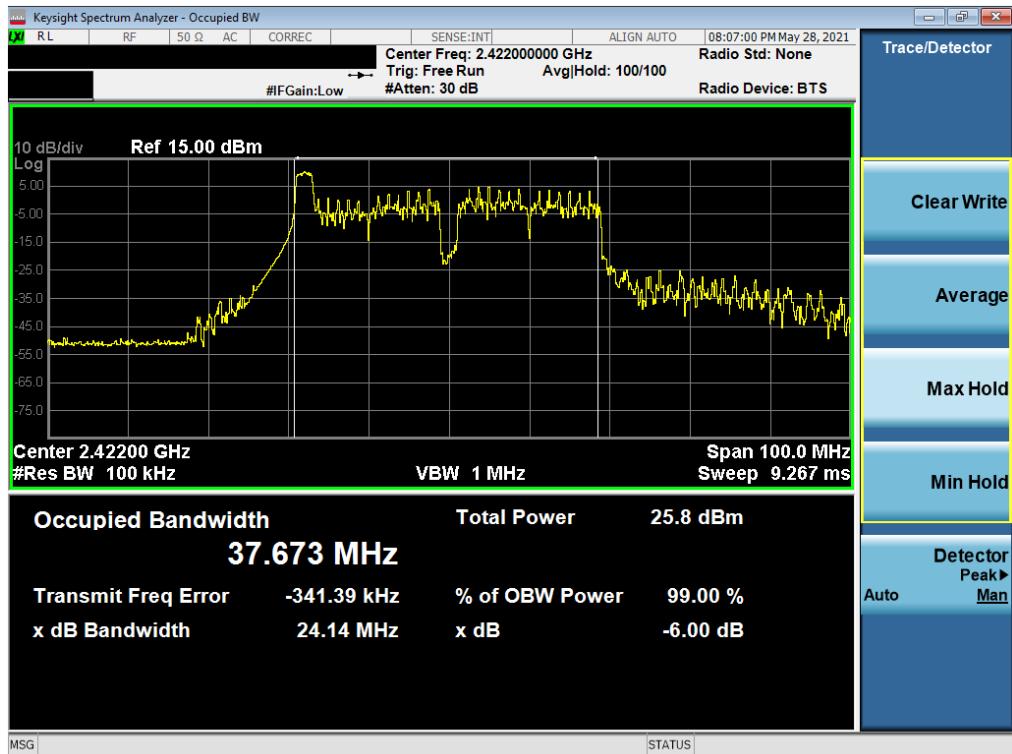


Plot 7-19. 6dB Bandwidth Plot SISO SOUTH (802.11ax 40MHz BW OFDMA – 26 Tones – Ch. 3)

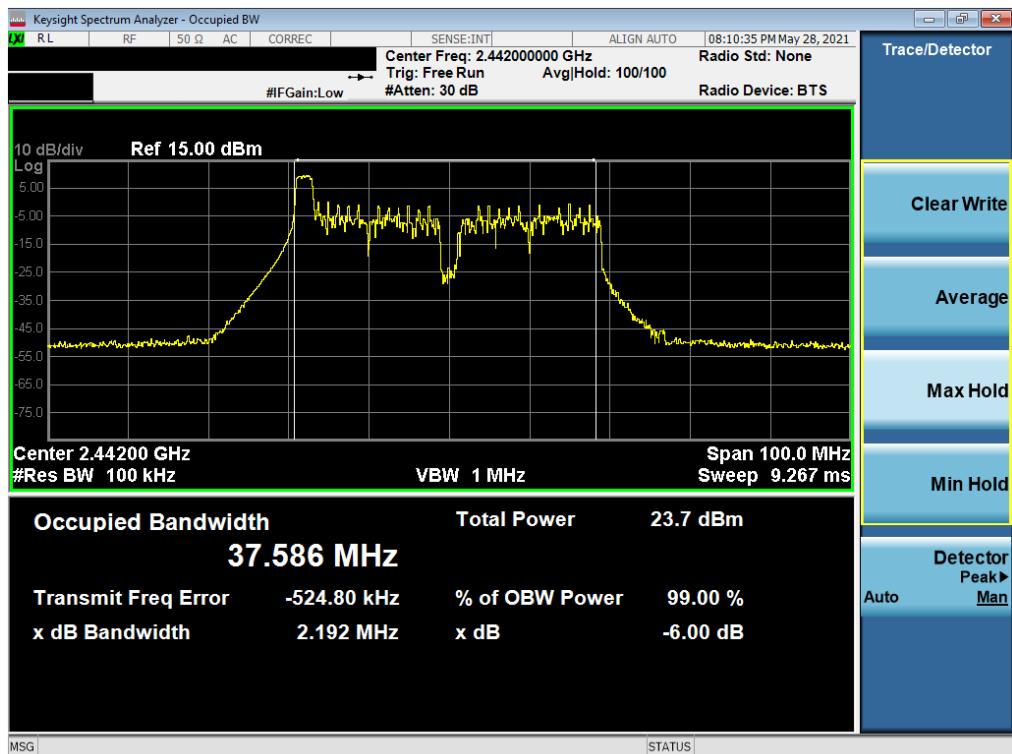


Plot 7-20. 6dB Bandwidth Plot SISO SOUTH (802.11ax 40MHz BW OFDMA – 26 Tones – Ch. 7)

FCC ID: C3K1995 IC: 3048A-1995	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset	Page 27 of 202

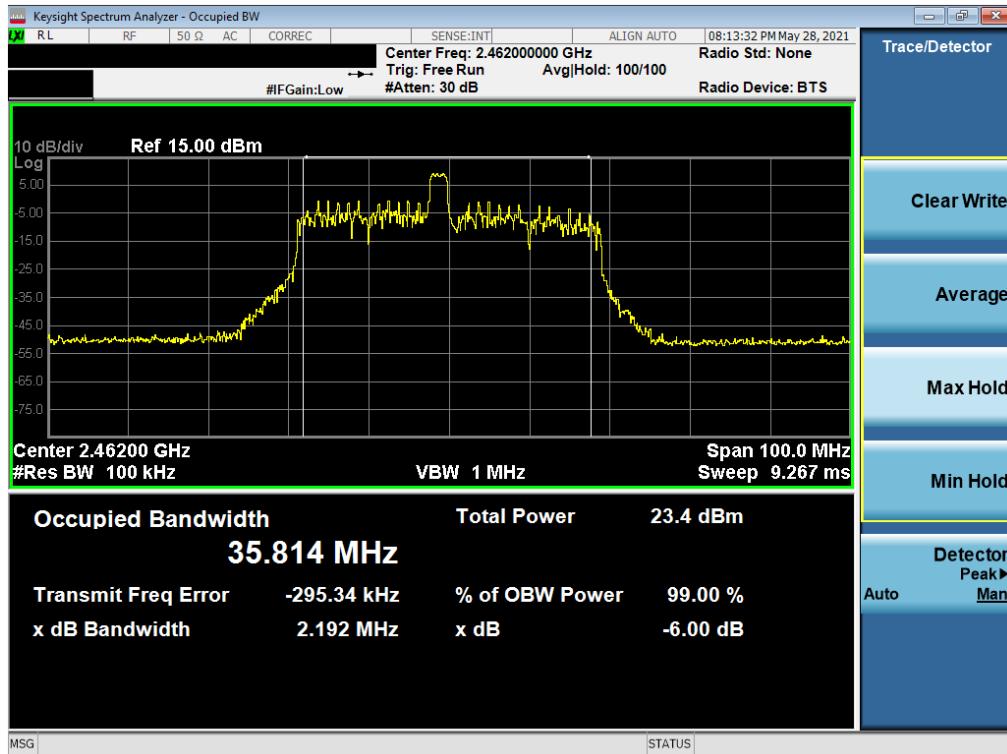


Plot 7-21. 6dB Bandwidth Plot SISO SOUTH (802.11ax 40MHz BW OFDMA – 26 Tones – Ch. 11)

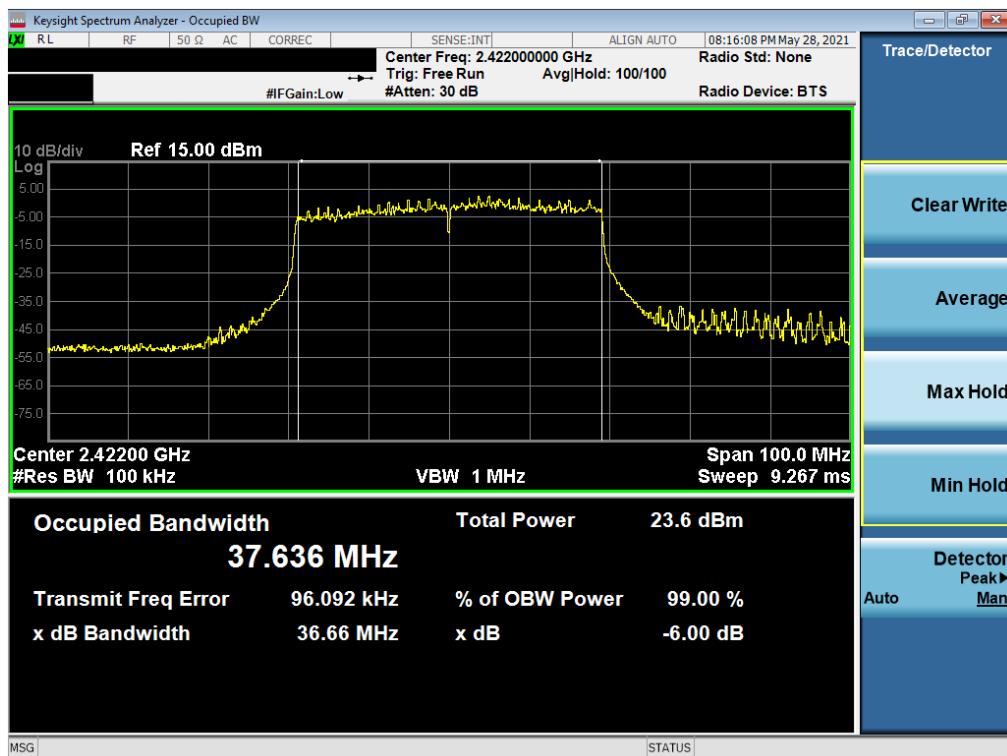


Plot 7-22. 6dB Bandwidth Plot SISO SOUTH (802.11ax 40MHz BW OFDMA – 484 Tones – Ch. 3)

FCC ID: C3K1995 IC: 3048A-1995	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 28 of 202

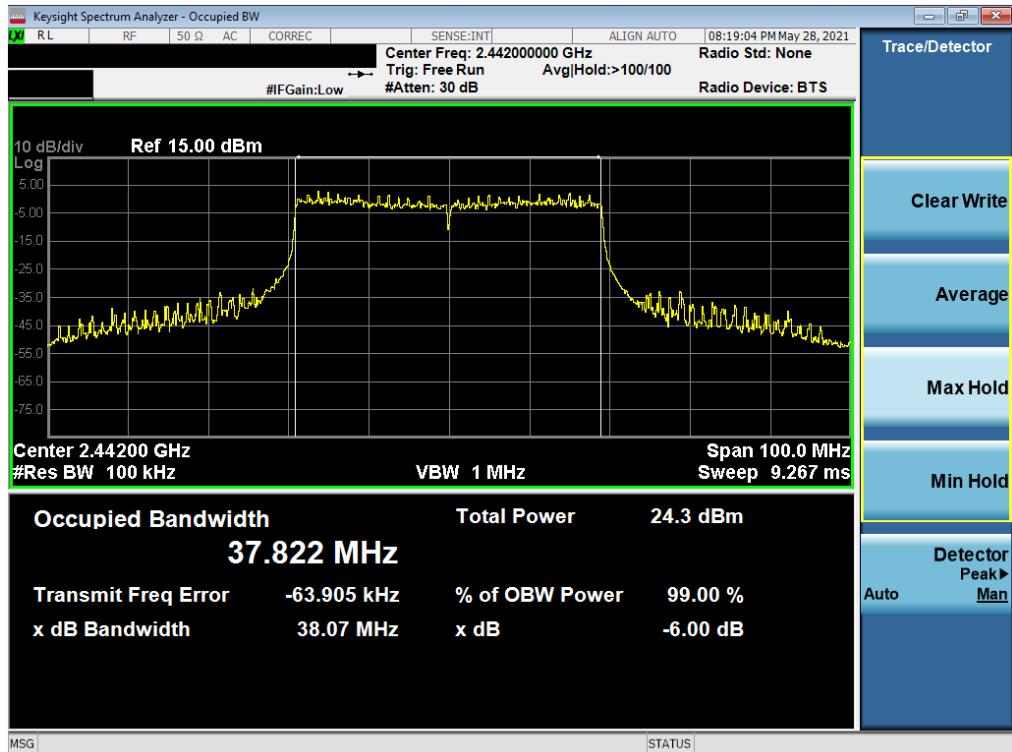

Plot 7-23. 6dB Bandwidth Plot SISO SOUTH (802.11ax 40MHz BW OFDMA – 484 Tones – Ch. 7)

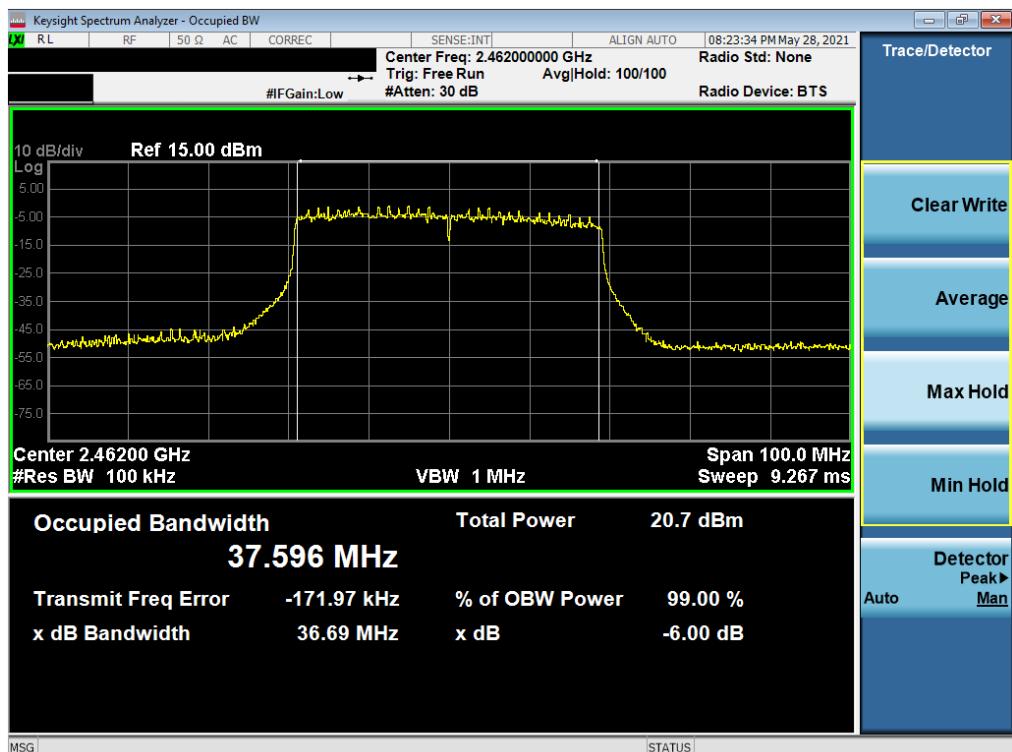

Plot 7-24. 6dB Bandwidth Plot SISO SOUTH (802.11ax 40MHz BW OFDMA – 484 Tones – Ch. 11)

FCC ID: C3K1995 IC: 3048A-1995	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset	Page 29 of 202

7.3 Output Power Measurement

§15.247(b.3); RSS-247 [5.4]

Test Overview and Limits

A transmitter antenna terminal of EUT is connected to the input of an RF power sensor. Measurement is made using a broadband power meter capable of making peak and average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

The maximum permissible conducted output power is 1 Watt.

Test Procedure Used

ANSI C63.10-2013 – Section 11.9.1.3 PKPM1 Peak Power Method

KDB 558074 D01 v05r02 – Section 8.3.1.3 PKPM1 Peak-reading Power Meter Method

ANSI C63.10-2013 – Section 11.9.2.3.2 Method AVGPM-G

KDB 558074 D01 v05r02 – Section 8.3.2.3 Measurement using a Power Meter (PM)

ANSI C63.10-2013 – Section 14.2 Measure-and-Sum Technique

KDB 662911 D01 v02r01 – Section E)1) Measure-and-Sum Technique

Test Settings

Method PKPM1 (Peak Power Measurement)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

Method AVGPM-G (Average Power Measurement)

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.



Figure 7-2. Test Instrument & Measurement Setup for Power Meter Measurements

Test Notes

None

FCC ID: C3K1995 IC: 3048A-1995	 PCTEST [®] <small>Proud to be part of element</small>		MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 30 of 202


2.4GHz	Freq [MHz]	Channel	Tones	RU Index	Detector	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
2412	1	26T	0	AVG	15.48	30.00	-14.52	-0.30	15.18	36.02	36.02	-20.84
				PEAK	23.06	30.00	-6.94	-0.30	22.76	36.02	36.02	-13.26
			4	AVG	15.31	30.00	-14.69	-0.30	15.01	36.02	36.02	-21.01
				PEAK	23.81	30.00	-6.19	-0.30	23.51	36.02	36.02	-12.51
			8	AVG	15.21	30.00	-14.79	-0.30	14.91	36.02	36.02	-21.11
				PEAK	22.96	30.00	-7.04	-0.30	22.66	36.02	36.02	-13.36
	6	26T	0	AVG	15.37	30.00	-14.63	-0.30	15.07	36.02	36.02	-20.95
				PEAK	22.97	30.00	-7.03	-0.30	22.67	36.02	36.02	-13.35
			4	AVG	15.37	30.00	-14.63	-0.30	15.07	36.02	36.02	-20.95
				PEAK	23.78	30.00	-6.22	-0.30	23.48	36.02	36.02	-12.54
			8	AVG	15.19	30.00	-14.81	-0.30	14.89	36.02	36.02	-21.13
				PEAK	22.96	30.00	-7.04	-0.30	22.66	36.02	36.02	-13.36
2437	10	26T	0	AVG	15.05	30.00	-14.95	-0.30	14.75	36.02	36.02	-21.27
				PEAK	22.51	30.00	-7.49	-0.30	22.21	36.02	36.02	-13.81
			4	AVG	15.47	30.00	-14.53	-0.30	15.17	36.02	36.02	-20.85
				PEAK	23.67	30.00	-6.33	-0.30	23.37	36.02	36.02	-12.65
			8	AVG	15.31	30.00	-14.69	-0.30	15.01	36.02	36.02	-21.01
				PEAK	23.68	30.00	-6.32	-0.30	23.38	36.02	36.02	-12.64
	11	26T	0	AVG	3.45	30.00	-26.55	-0.30	3.15	36.02	36.02	-32.87
				PEAK	10.65	30.00	-19.35	-0.30	10.35	36.02	36.02	-25.67
			4	AVG	3.36	30.00	-26.64	-0.30	3.06	36.02	36.02	-32.96
				PEAK	11.27	30.00	-18.73	-0.30	10.97	36.02	36.02	-25.05
			8	AVG	3.21	30.00	-26.79	-0.30	2.91	36.02	36.02	-33.11
				PEAK	10.78	30.00	-19.22	-0.30	10.48	36.02	36.02	-25.54
2457	12	26T	0	AVG	3.11	30.00	-26.89	-0.30	2.81	36.02	36.02	-33.21
				PEAK	10.67	30.00	-19.33	-0.30	10.37	36.02	36.02	-25.65
			4	AVG	3.47	30.00	-26.53	-0.30	3.17	36.02	36.02	-32.85
				PEAK	11.38	30.00	-18.62	-0.30	11.08	36.02	36.02	-24.94
			8	AVG	3.48	30.00	-26.52	-0.30	3.18	36.02	36.02	-32.84
				PEAK	11.91	30.00	-18.09	-0.30	11.61	36.02	36.02	-24.41
	13	26T	0	AVG	-0.57	30.00	-30.57	-0.30	-0.87	36.02	36.02	-36.89
				PEAK	6.78	30.00	-23.22	-0.30	6.48	36.02	36.02	-29.54
			4	AVG	-0.81	30.00	-30.81	-0.30	-1.11	36.02	36.02	-37.13
				PEAK	6.58	30.00	-23.42	-0.30	6.28	36.02	36.02	-29.74
			8	AVG	-0.96	30.00	-30.96	-0.30	-1.26	36.02	36.02	-37.28
				PEAK	6.49	30.00	-23.51	-0.30	6.19	36.02	36.02	-29.83

Table 7-6. Conducted Output Power Measurements SISO SOUTH (26 Tones) 20MHz BW

FCC ID: C3K1995 IC: 3048A-1995	MEASUREMENT REPORT (CERTIFICATION)				Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset			
© 2021 PCTEST				Page 31 of 202	

	Freq [MHz]	Channel	Tones	RU Index	Detector	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
2.4GHz	2422	3	26T	0	AVG	15.21	30.00	-14.79	-0.30	14.91	36.02	-21.11
					PEAK	22.77	30.00	-7.23	-0.30	22.47	36.02	-13.55
				8	AVG	15.31	30.00	-14.69	-0.30	15.01	36.02	-21.01
					PEAK	22.95	30.00	-7.05	-0.30	22.65	36.02	-13.37
				17	AVG	15.21	30.00	-14.79	-0.30	14.91	36.02	-21.11
					PEAK	22.82	30.00	-7.18	-0.30	22.52	36.02	-13.50
	2442	7	26T	0	AVG	15.22	30.00	-14.78	-0.30	14.92	36.02	-21.10
					PEAK	22.81	30.00	-7.19	-0.30	22.51	36.02	-13.51
				8	AVG	15.34	30.00	-14.66	-0.30	15.04	36.02	-20.98
					PEAK	22.84	30.00	-7.16	-0.30	22.54	36.02	-13.48
				17	AVG	15.17	30.00	-14.83	-0.30	14.87	36.02	-21.15
					PEAK	22.78	30.00	-7.22	-0.30	22.48	36.02	-13.54
	2457	10	26T	0	AVG	15.00	30.00	-15.00	-0.30	14.70	36.02	-21.32
					PEAK	22.58	30.00	-7.42	-0.30	22.28	36.02	-13.74
				8	AVG	15.41	30.00	-14.59	-0.30	15.11	36.02	-20.91
					PEAK	22.82	30.00	-7.18	-0.30	22.52	36.02	-13.50
				17	AVG	15.43	30.00	-14.57	-0.30	15.13	36.02	-20.89
					PEAK	22.84	30.00	-7.16	-0.30	22.54	36.02	-13.48
	2462	11	26T	0	AVG	3.39	30.00	-26.61	-0.30	3.09	36.02	-32.93
					PEAK	10.71	30.00	-19.29	-0.30	10.41	36.02	-25.61
				8	AVG	3.38	30.00	-26.62	-0.30	3.08	36.02	-32.94
					PEAK	10.91	30.00	-19.09	-0.30	10.61	36.02	-25.41
				17	AVG	3.04	30.00	-26.96	-0.30	2.74	36.02	-33.28
					PEAK	10.59	30.00	-19.41	-0.30	10.29	36.02	-25.73

Table 7-7. Conducted Output Power Measurements SISO SOUTH (26 Tones) 40MHz BW

FCC ID: C3K1995 IC: 3048A-1995	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 32 of 202


2.4GHz Radio Performance Metrics												
Freq [MHz]	Channel	Tones	RU Index	Detector	Conducted Powers	Conducted Power Limit	Conducted Power Margin	Ant. Gain	Max e.i.r.p.	Max e.i.r.p.	e.i.r.p.	
					(dBm)	(dBm)	(dB)	[dBi]	[dBm]	[dBm]	Margin [dB]	
2412	1	52T	37	AVG	16.28	30.00	-13.72	-0.30	15.98	36.02	-20.04	
				PEAK	24.09	30.00	-5.91	-0.30	23.79	36.02	-12.23	
			38	AVG	16.17	30.00	-13.83	-0.30	15.87	36.02	-20.15	
				PEAK	23.93	30.00	-6.07	-0.30	23.63	36.02	-12.39	
			40	AVG	16.26	30.00	-13.74	-0.30	15.96	36.02	-20.06	
				PEAK	24.25	30.00	-5.75	-0.30	23.95	36.02	-12.07	
			37	AVG	16.48	30.00	-13.52	-0.30	16.18	36.02	-19.84	
				PEAK	23.95	30.00	-6.05	-0.30	23.65	36.02	-12.37	
			38	AVG	16.43	30.00	-13.57	-0.30	16.13	36.02	-19.89	
				PEAK	23.85	30.00	-6.15	-0.30	23.55	36.02	-12.47	
			40	AVG	16.35	30.00	-13.65	-0.30	16.05	36.02	-19.97	
				PEAK	24.26	30.00	-5.74	-0.30	23.96	36.02	-12.06	
2437	6	52T	37	AVG	16.41	30.00	-13.59	-0.30	16.11	36.02	-19.91	
				PEAK	23.72	30.00	-6.28	-0.30	23.42	36.02	-12.60	
			38	AVG	16.05	30.00	-13.95	-0.30	15.75	36.02	-20.27	
				PEAK	23.81	30.00	-6.19	-0.30	23.51	36.02	-12.51	
			40	AVG	15.98	30.00	-14.02	-0.30	15.68	36.02	-20.34	
				PEAK	23.64	30.00	-6.36	-0.30	23.34	36.02	-12.68	
			37	AVG	3.34	30.00	-26.66	-0.30	3.04	36.02	-32.98	
				PEAK	11.57	30.00	-18.43	-0.30	11.27	36.02	-24.75	
			38	AVG	3.78	30.00	-26.22	-0.30	3.48	36.02	-32.54	
				PEAK	11.59	30.00	-18.41	-0.30	11.29	36.02	-24.73	
			40	AVG	3.82	30.00	-26.18	-0.30	3.52	36.02	-32.50	
				PEAK	11.72	30.00	-18.28	-0.30	11.42	36.02	-24.60	
2467	12	52T	37	AVG	3.47	30.00	-26.53	-0.30	3.17	36.02	-32.85	
				PEAK	10.85	30.00	-19.15	-0.30	10.55	36.02	-25.47	
			38	AVG	3.92	30.00	-26.08	-0.30	3.62	36.02	-32.40	
				PEAK	11.08	30.00	-18.92	-0.30	10.78	36.02	-25.24	
			40	AVG	3.48	30.00	-26.52	-0.30	3.18	36.02	-32.84	
				PEAK	11.18	30.00	-18.82	-0.30	10.88	36.02	-25.14	
2472	13	52T	37	AVG	1.33	30.00	-28.67	-0.30	1.03	36.02	-34.99	
				PEAK	9.00	30.00	-21.00	-0.30	8.70	36.02	-27.32	
			38	AVG	1.14	30.00	-28.86	-0.30	0.84	36.02	-35.18	
				PEAK	8.82	30.00	-21.18	-0.30	8.52	36.02	-27.50	
			40	AVG	1.32	30.00	-28.68	-0.30	1.02	36.02	-35.00	
				PEAK	8.92	30.00	-21.08	-0.30	8.62	36.02	-27.40	

Table 7-8. Conducted Output Power Measurements SISO SOUTH (52 Tones) 20MHz BW

FCC ID: C3K1995 IC: 3048A-1995	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 33 of 202

	Freq [MHz]	Channel	Tones	RU Index	Detector	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
2.4GHz	2422	3	52T	37	AVG	16.23	30.00	-13.77	-0.30	15.93	36.02	-20.09
					PEAK	24.14	30.00	-5.86	-0.30	23.84	36.02	-12.18
				40	AVG	16.31	30.00	-13.69	-0.30	16.01	36.02	-20.01
					PEAK	24.24	30.00	-5.76	-0.30	23.94	36.02	-12.08
				44	AVG	16.48	30.00	-13.52	-0.30	16.18	36.02	-19.84
					PEAK	24.96	30.00	-5.04	-0.30	24.66	36.02	-11.36
	2442	7	52T	37	AVG	16.18	30.00	-13.82	-0.30	15.88	36.02	-20.14
					PEAK	24.22	30.00	-5.78	-0.30	23.92	36.02	-12.10
				40	AVG	16.31	30.00	-13.69	-0.30	16.01	36.02	-20.01
					PEAK	24.17	30.00	-5.83	-0.30	23.87	36.02	-12.15
				44	AVG	16.49	30.00	-13.51	-0.30	16.19	36.02	-19.83
					PEAK	25.45	30.00	-4.55	-0.30	25.15	36.02	-10.87
	2457	10	52T	37	AVG	16.23	30.00	-13.77	-0.30	15.93	36.02	-20.09
					PEAK	23.71	30.00	-6.29	-0.30	23.41	36.02	-12.61
				40	AVG	16.38	30.00	-13.62	-0.30	16.08	36.02	-19.94
					PEAK	24.27	30.00	-5.73	-0.30	23.97	36.02	-12.05
				44	AVG	16.06	30.00	-13.94	-0.30	15.76	36.02	-20.26
					PEAK	23.45	30.00	-6.55	-0.30	23.15	36.02	-12.87
	2462	11	52T	37	AVG	3.85	30.00	-26.15	-0.30	3.55	36.02	-32.47
					PEAK	11.68	30.00	-18.32	-0.30	11.38	36.02	-24.64
				40	AVG	3.50	30.00	-26.50	-0.30	3.20	36.02	-32.82
					PEAK	11.10	30.00	-18.90	-0.30	10.80	36.02	-25.22
				44	AVG	3.95	30.00	-26.05	-0.30	3.65	36.02	-32.37
					PEAK	11.48	30.00	-18.52	-0.30	11.18	36.02	-24.84

Table 7-9. Conducted Output Power Measurements SISO SOUTH (52 Tones) 40MHz BW

FCC ID: C3K1995 IC: 3048A-1995	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Microsoft	Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 34 of 202

2.4GHz	Freq [MHz]	Channel	Tones	RU Index	Detector	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]	
	2412	1	106T	53	AVG	16.48	30.00	-13.52	-0.30	16.18	36.02	-19.84	
					PEAK	24.46	30.00	-5.54	-0.30	24.16	36.02	-11.86	
		2		54	AVG	16.47	30.00	-13.53	-0.30	16.17	36.02	-19.85	
					PEAK	24.48	30.00	-5.52	-0.30	24.18	36.02	-11.84	
	2417	2		53	AVG	17.31	30.00	-12.69	-0.30	17.01	36.02	-19.01	
					PEAK	25.01	30.00	-4.99	-0.30	24.71	36.02	-11.31	
		54		54	AVG	17.29	30.00	-12.71	-0.30	16.99	36.02	-19.03	
					PEAK	25.00	30.00	-5.00	-0.30	24.70	36.02	-11.32	
	2437	6		53	AVG	17.41	30.00	-12.59	-0.30	17.11	36.02	-18.91	
					PEAK	25.08	30.00	-4.92	-0.30	24.78	36.02	-11.24	
		54		54	AVG	17.34	30.00	-12.66	-0.30	17.04	36.02	-18.98	
					PEAK	25.04	30.00	-4.96	-0.30	24.74	36.02	-11.28	
	2457	10		53	AVG	17.03	30.00	-12.97	-0.30	16.73	36.02	-19.29	
					PEAK	24.77	30.00	-5.23	-0.30	24.47	36.02	-11.55	
		54		54	AVG	17.21	30.00	-12.79	-0.30	16.91	36.02	-19.11	
					PEAK	24.89	30.00	-5.11	-0.30	24.59	36.02	-11.43	
	2462	11		53	AVG	2.74	30.00	-27.26	-0.30	2.44	36.02	-33.58	
					PEAK	10.45	30.00	-19.55	-0.30	10.15	36.02	-25.87	
		54		54	AVG	2.67	30.00	-27.33	-0.30	2.37	36.02	-33.65	
					PEAK	10.34	30.00	-19.66	-0.30	10.04	36.02	-25.98	
	2467	12		53	AVG	2.67	30.00	-27.33	-0.30	2.37	36.02	-33.65	
					PEAK	11.03	30.00	-18.97	-0.30	10.73	36.02	-25.29	
		54		54	AVG	2.81	30.00	-27.19	-0.30	2.51	36.02	-33.51	
					PEAK	10.63	30.00	-19.37	-0.30	10.33	36.02	-25.69	
	2472	13		53	AVG	2.98	30.00	-27.02	-0.30	2.68	36.02	-33.34	
					PEAK	10.64	30.00	-19.36	-0.30	10.34	36.02	-25.68	
		54		54	AVG	2.93	30.00	-27.07	-0.30	2.63	36.02	-33.39	
					PEAK	10.48	30.00	-19.52	-0.30	10.18	36.02	-25.84	

Table 7-10. Conducted Output Power Measurements SISO SOUTH (106 Tones) 20MHz BW


FCC ID: C3K1995 IC: 3048A-1995	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 35 of 202

2.4GHz	Freq [MHz]	Channel	Tones	RU Index	Detector	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
2.4GHz	2422	3	106T	53	AVG	17.48	30.00	-12.52	-0.30	17.18	36.02	-18.84
					PEAK	24.94	30.00	-5.06	-0.30	24.64	36.02	-11.38
				54	AVG	17.42	30.00	-12.58	-0.30	17.12	36.02	-18.90
					PEAK	25.22	30.00	-4.78	-0.30	24.92	36.02	-11.10
				56	AVG	17.48	30.00	-12.52	-0.30	17.18	36.02	-18.84
					PEAK	24.87	30.00	-5.13	-0.30	24.57	36.02	-11.45
	2442	7	106T	53	AVG	17.46	30.00	-12.54	-0.30	17.16	36.02	-18.86
					PEAK	25.25	30.00	-4.75	-0.30	24.95	36.02	-11.07
				54	AVG	17.23	30.00	-12.77	-0.30	16.93	36.02	-19.09
					PEAK	24.89	30.00	-5.11	-0.30	24.59	36.02	-11.43
				56	AVG	17.24	30.00	-12.76	-0.30	16.94	36.02	-19.08
					PEAK	24.79	30.00	-5.21	-0.30	24.49	36.02	-11.53
	2457	10	106T	53	AVG	17.23	30.00	-12.77	-0.30	16.93	36.02	-19.09
					PEAK	24.56	30.00	-5.44	-0.30	24.26	36.02	-11.76
				54	AVG	17.38	30.00	-12.62	-0.30	17.08	36.02	-18.94
					PEAK	24.85	30.00	-5.15	-0.30	24.55	36.02	-11.47
				56	AVG	17.19	30.00	-12.81	-0.30	16.89	36.02	-19.13
					PEAK	24.42	30.00	-5.58	-0.30	24.12	36.02	-11.90
	2462	11	106T	53	AVG	2.75	30.00	-27.25	-0.30	2.45	36.02	-33.57
					PEAK	10.59	30.00	-19.41	-0.30	10.29	36.02	-25.73
				54	AVG	2.73	30.00	-27.27	-0.30	2.43	36.02	-33.59
					PEAK	10.72	30.00	-19.28	-0.30	10.42	36.02	-25.60
				56	AVG	2.83	30.00	-27.17	-0.30	2.53	36.02	-33.49
					PEAK	10.69	30.00	-19.31	-0.30	10.39	36.02	-25.63

Table 7-11. Conducted Output Power Measurements SISO SOUTH (106 Tones) 40MHz BW

2.4GHz	Freq [MHz]	Channel	Tones	RU Index	Detector	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
2.4GHz	2412	1	242T	61	AVG	16.34	30.00	-13.66	-0.30	16.04	36.02	-19.98
					PEAK	23.74	30.00	-6.26	-0.30	23.44	36.02	-12.58
				61	AVG	17.22	30.00	-12.78	-0.30	16.92	36.02	-19.10
					PEAK	24.19	30.00	-5.81	-0.30	23.89	36.02	-12.13
				61	AVG	17.32	30.00	-12.68	-0.30	17.02	36.02	-19.00
					PEAK	24.37	30.00	-5.63	-0.30	24.07	36.02	-11.95
	2452	9	242T	61	AVG	15.54	30.00	-14.46	-0.30	15.24	36.02	-20.78
					PEAK	22.03	30.00	-7.97	-0.30	21.73	36.02	-14.29
				61	AVG	13.24	30.00	-16.76	-0.30	12.94	36.02	-23.08
					PEAK	21.04	30.00	-8.96	-0.30	20.74	36.02	-15.28
				61	AVG	6.82	30.00	-23.18	-0.30	6.52	36.02	-29.50
					PEAK	14.27	30.00	-15.73	-0.30	13.97	36.02	-22.05
	2467	12	242T	61	AVG	6.64	30.00	-23.36	-0.30	6.34	36.02	-29.68
					PEAK	13.89	30.00	-16.11	-0.30	13.59	36.02	-22.43
	2472	13	242T	61	AVG	6.81	30.00	-23.19	-0.30	6.51	36.02	-29.51
					PEAK	14.10	30.00	-15.90	-0.30	13.80	36.02	-22.22

Table 7-12. Conducted Output Power Measurements SISO SOUTH (242 Tones) 20MHz BW

FCC ID: C3K1995 IC: 3048A-1995	 PCTEST [®] Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 36 of 202

2.4GHz	Freq [MHz]	Channel	Tones	RU Index	Detector	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	2422	3	242T	61	AVG	17.15	30.00	-12.85	-0.30	16.85	36.02	-19.17
					PEAK	24.81	30.00	-5.19	-0.30	24.51	36.02	-11.51
	2442	7	242T	62	AVG	17.21	30.00	-12.79	-0.30	16.91	36.02	-19.11
					PEAK	24.76	30.00	-5.24	-0.30	24.46	36.02	-11.56
	2452	9	242T	61	AVG	17.46	30.00	-12.54	-0.30	17.16	36.02	-18.86
					PEAK	25.06	30.00	-4.94	-0.30	24.76	36.02	-11.26
	2457	10	242T	62	AVG	17.14	30.00	-12.86	-0.30	16.84	36.02	-19.18
					PEAK	24.78	30.00	-5.22	-0.30	24.48	36.02	-11.54
	2462	11	242T	61	AVG	15.69	30.00	-14.31	-0.30	15.39	36.02	-20.63
					PEAK	23.45	30.00	-6.55	-0.30	23.15	36.02	-12.87
	2462	11	242T	62	AVG	15.79	30.00	-14.21	-0.30	15.49	36.02	-20.53
					PEAK	23.36	30.00	-6.64	-0.30	23.06	36.02	-12.96
	2457	10	242T	61	AVG	13.12	30.00	-16.88	-0.30	12.82	36.02	-23.20
					PEAK	21.14	30.00	-8.86	-0.30	20.84	36.02	-15.18
	2457	10	242T	62	AVG	13.10	30.00	-16.90	-0.30	12.80	36.02	-23.22
					PEAK	21.19	30.00	-8.81	-0.30	20.89	36.02	-15.13
	2462	11	242T	61	AVG	6.84	30.00	-23.16	-0.30	6.54	36.02	-29.48
					PEAK	14.54	30.00	-15.46	-0.30	14.24	36.02	-21.78
	2462	11	242T	62	AVG	6.65	30.00	-23.35	-0.30	6.35	36.02	-29.67
					PEAK	14.29	30.00	-15.71	-0.30	13.99	36.02	-22.03

Table 7-13. Conducted Output Power Measurements SISO SOUTH (242 Tones) 40MHz BW

2.4GHz	Freq [MHz]	Channel	Tones	RU Index	Detector	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	2422	3	484T	65	AVG	14.26	30.00	-15.74	-0.30	13.96	36.02	-22.06
					PEAK	21.56	30.00	-8.44	-0.30	21.26	36.02	-14.76
	2427	4	484T	65	AVG	14.26	30.00	-15.74	-0.30	13.96	36.02	-22.06
					PEAK	22.78	30.00	-7.22	-0.30	22.48	36.02	-13.54
	2432	5	484T	65	AVG	15.32	30.00	-14.68	-0.30	15.02	36.02	-21.00
					PEAK	22.53	30.00	-7.47	-0.30	22.23	36.02	-13.79
	2442	7	484T	65	AVG	15.43	30.00	-14.57	-0.30	15.13	36.02	-20.89
					PEAK	22.94	30.00	-7.06	-0.30	22.64	36.02	-13.38
	2447	8	484T	65	AVG	15.40	30.00	-14.60	-0.30	15.10	36.02	-20.92
					PEAK	22.59	30.00	-7.41	-0.30	22.29	36.02	-13.73
	2452	9	484T	65	AVG	15.08	30.00	-14.92	-0.30	14.78	36.02	-21.24
					PEAK	22.89	30.00	-7.11	-0.30	22.59	36.02	-13.43
	2457	10	484T	65	AVG	13.68	30.00	-16.32	-0.30	13.38	36.02	-22.64
					PEAK	22.25	30.00	-7.75	-0.30	21.95	36.02	-14.07
	2462	11	484T	65	AVG	8.54	30.00	-21.46	-0.30	8.24	36.02	-27.78
					PEAK	18.52	30.00	-11.48	-0.30	18.22	36.02	-17.80

Table 7-14. Conducted Output Power Measurements SISO SOUTH (484 Tones) 40MHz BW

FCC ID: C3K1995 IC: 3048A-1995	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Microsoft	Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 37 of 202

2.4GHz	Freq [MHz]	Channel	Tones	RU Index	Detector	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	2412	1	26T	0	AVG	15.33	30.00	-14.67	-3.20	12.13	36.02	-23.89
					PEAK	22.81	30.00	-7.19	-3.20	19.61	36.02	-16.41
				4	AVG	15.25	30.00	-14.75	-3.20	12.05	36.02	-23.97
					PEAK	23.89	30.00	-6.11	-3.20	20.69	36.02	-15.33
	2437	6	26T	0	AVG	15.26	30.00	-14.74	-3.20	12.06	36.02	-23.96
					PEAK	23.37	30.00	-6.63	-3.20	20.17	36.02	-15.85
				4	AVG	15.36	30.00	-14.64	-3.20	12.16	36.02	-23.86
					PEAK	22.85	30.00	-7.15	-3.20	19.65	36.02	-16.37
	2457	10	26T	0	AVG	15.41	30.00	-14.59	-3.20	12.21	36.02	-23.81
					PEAK	23.57	30.00	-6.43	-3.20	20.37	36.02	-15.65
				4	AVG	15.17	30.00	-14.83	-3.20	11.97	36.02	-24.05
					PEAK	22.78	30.00	-7.22	-3.20	19.58	36.02	-16.44
	2462	11	26T	0	AVG	15.08	30.00	-14.92	-3.20	11.88	36.02	-24.14
					PEAK	21.98	30.00	-8.02	-3.20	18.78	36.02	-17.24
				4	AVG	15.24	30.00	-14.76	-3.20	12.04	36.02	-23.98
					PEAK	21.32	30.00	-8.68	-3.20	18.12	36.02	-17.90
	2467	12	26T	0	AVG	15.18	30.00	-14.82	-3.20	11.98	36.02	-24.04
					PEAK	23.56	30.00	-6.44	-3.20	20.36	36.02	-15.66
				4	AVG	3.18	30.00	-26.82	-3.20	-0.02	36.02	-36.04
					PEAK	10.78	30.00	-19.22	-3.20	7.58	36.02	-28.44
	2472	13	26T	0	AVG	3.46	30.00	-26.54	-3.20	0.26	36.02	-35.76
					PEAK	11.05	30.00	-18.95	-3.20	7.85	36.02	-28.17
				4	AVG	3.25	30.00	-26.75	-3.20	0.05	36.02	-35.97
					PEAK	10.98	30.00	-19.02	-3.20	7.78	36.02	-28.24
	2467	12	26T	0	AVG	3.24	30.00	-26.76	-3.20	0.04	36.02	-35.98
					PEAK	10.75	30.00	-19.25	-3.20	7.55	36.02	-28.47
				4	AVG	3.31	30.00	-26.69	-3.20	0.11	36.02	-35.91
					PEAK	11.15	30.00	-18.85	-3.20	7.95	36.02	-28.07
	2472	13	26T	0	AVG	3.45	30.00	-26.55	-3.20	0.25	36.02	-35.77
					PEAK	10.87	30.00	-19.13	-3.20	7.67	36.02	-28.35
				4	AVG	-0.96	30.00	-30.96	-3.20	-4.16	36.02	-40.18
					PEAK	6.33	30.00	-23.67	-3.20	3.13	36.02	-32.89
	2472	13	26T	0	AVG	-0.68	30.00	-30.68	-3.20	-3.88	36.02	-39.90
					PEAK	7.22	30.00	-22.78	-3.20	4.02	36.02	-32.00
				4	AVG	-0.68	30.00	-30.68	-3.20	-3.88	36.02	-39.90
					PEAK	6.91	30.00	-23.09	-3.20	3.71	36.02	-32.31

Table 7-15. Conducted Output Power Measurements SISO NORTH (26 Tones) 20MHz BW

FCC ID: C3K1995 IC: 3048A-1995	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 38 of 202


2.4GHz	Freq [MHz]	Channel	Tones	RU Index	Detector	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
2.4GHz	2422	3	26T	0	AVG	15.48	30.00	-14.52	-3.20	12.28	36.02	-23.74
					PEAK	22.92	30.00	-7.08	-3.20	19.72	36.02	-16.30
				8	AVG	15.43	30.00	-14.57	-3.20	12.23	36.02	-23.79
					PEAK	23.16	30.00	-6.84	-3.20	19.96	36.02	-16.06
				17	AVG	15.48	30.00	-14.52	-3.20	12.28	36.02	-23.74
					PEAK	22.98	30.00	-7.02	-3.20	19.78	36.02	-16.24
	2442	7	26T	0	AVG	15.45	30.00	-14.55	-3.20	12.25	36.02	-23.77
					PEAK	23.17	30.00	-6.83	-3.20	19.97	36.02	-16.05
				8	AVG	15.07	30.00	-14.93	-3.20	11.87	36.02	-24.15
					PEAK	22.74	30.00	-7.26	-3.20	19.54	36.02	-16.48
				17	AVG	15.21	30.00	-14.79	-3.20	12.01	36.02	-24.01
					PEAK	22.93	30.00	-7.07	-3.20	19.73	36.02	-16.29
	2457	10	26T	0	AVG	15.15	30.00	-14.85	-3.20	11.95	36.02	-24.07
					PEAK	22.67	30.00	-7.33	-3.20	19.47	36.02	-16.55
				8	AVG	15.49	30.00	-14.51	-3.20	12.29	36.02	-23.73
					PEAK	23.18	30.00	-6.82	-3.20	19.98	36.02	-16.04
				17	AVG	15.23	30.00	-14.77	-3.20	12.03	36.02	-23.99
					PEAK	22.31	30.00	-7.69	-3.20	19.11	36.02	-16.91
	2462	11	26T	0	AVG	3.03	30.00	-26.97	-3.20	-0.17	36.02	-36.19
					PEAK	10.53	30.00	-19.47	-3.20	7.33	36.02	-28.69
				8	AVG	3.12	30.00	-26.88	-3.20	-0.08	36.02	-36.10
					PEAK	10.61	30.00	-19.39	-3.20	7.41	36.02	-28.61
				17	AVG	2.64	30.00	-27.36	-3.20	-0.56	36.02	-36.58
					PEAK	10.29	30.00	-19.71	-3.20	7.09	36.02	-28.93

Table 7-16. Conducted Output Power Measurements SISO NORTH (26 Tones) 40MHz BW

FCC ID: C3K1995 IC: 3048A-1995	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 39 of 202

2.4GHz													
	Freq [MHz]	Channel	Tones	RU Index	Detector	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]	
2412	1	52T	37	AVG	16.46	30.00	-13.54	-3.20	13.26	36.02	36.02	-22.76	
				PEAK	23.89	30.00	-6.11	-3.20	20.69	36.02	36.02	-15.33	
			38	AVG	16.27	30.00	-13.73	-3.20	13.07	36.02	36.02	-22.95	
				PEAK	23.65	30.00	-6.35	-3.20	20.45	36.02	36.02	-15.57	
			40	AVG	16.13	30.00	-13.87	-3.20	12.93	36.02	36.02	-23.09	
				PEAK	24.05	30.00	-5.95	-3.20	20.85	36.02	36.02	-15.17	
	2437	6	37	AVG	16.45	30.00	-13.55	-3.20	13.25	36.02	36.02	-22.77	
				PEAK	23.93	30.00	-6.07	-3.20	20.73	36.02	36.02	-15.29	
			38	AVG	16.18	30.00	-13.82	-3.20	12.98	36.02	36.02	-23.04	
				PEAK	23.75	30.00	-6.25	-3.20	20.55	36.02	36.02	-15.47	
			40	AVG	16.38	30.00	-13.62	-3.20	13.18	36.02	36.02	-22.84	
				PEAK	24.09	30.00	-5.91	-3.20	20.89	36.02	36.02	-15.13	
2457	10	52T	37	AVG	16.35	30.00	-13.65	-3.20	13.15	36.02	36.02	-22.87	
				PEAK	24.13	30.00	-5.87	-3.20	20.93	36.02	36.02	-15.09	
			38	AVG	16.05	30.00	-13.95	-3.20	12.85	36.02	36.02	-23.17	
				PEAK	23.03	30.00	-6.97	-3.20	19.83	36.02	36.02	-16.19	
			40	AVG	16.12	30.00	-13.88	-3.20	12.92	36.02	36.02	-23.10	
				PEAK	23.04	30.00	-6.96	-3.20	19.84	36.02	36.02	-16.18	
	2462	11	37	AVG	3.96	30.00	-26.04	-3.20	0.76	36.02	36.02	-35.26	
				PEAK	11.97	30.00	-18.03	-3.20	8.77	36.02	36.02	-27.25	
			38	AVG	3.72	30.00	-26.28	-3.20	0.52	36.02	36.02	-35.50	
				PEAK	11.85	30.00	-18.15	-3.20	8.65	36.02	36.02	-27.37	
			40	AVG	3.85	30.00	-26.15	-3.20	0.65	36.02	36.02	-35.37	
				PEAK	11.78	30.00	-18.22	-3.20	8.58	36.02	36.02	-27.44	
2467	12	52T	37	AVG	3.52	30.00	-26.48	-3.20	0.32	36.02	36.02	-35.70	
				PEAK	10.98	30.00	-19.02	-3.20	7.78	36.02	36.02	-28.24	
			38	AVG	3.65	30.00	-26.35	-3.20	0.45	36.02	36.02	-35.57	
				PEAK	11.43	30.00	-18.57	-3.20	8.23	36.02	36.02	-27.79	
	2472	13	37	AVG	3.45	30.00	-26.55	-3.20	0.25	36.02	36.02	-35.77	
				PEAK	11.04	30.00	-18.96	-3.20	7.84	36.02	36.02	-28.18	
			38	AVG	1.49	30.00	-28.51	-3.20	-1.71	36.02	36.02	-37.73	
				PEAK	9.22	30.00	-20.78	-3.20	6.02	36.02	36.02	-30.00	
			40	AVG	1.23	30.00	-28.77	-3.20	-1.97	36.02	36.02	-37.99	
				PEAK	8.91	30.00	-21.09	-3.20	5.71	36.02	36.02	-30.31	
				AVG	1.00	30.00	-29.00	-3.20	-2.20	36.02	36.02	-38.22	
				PEAK	8.67	30.00	-21.33	-3.20	5.47	36.02	36.02	-30.55	

Table 7-17. Conducted Output Power Measurements SISO NORTH (52 Tones) 20MHz BW

FCC ID: C3K1995 IC: 3048A-1995	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Microsoft	Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 40 of 202

2.4GHz	Freq [MHz]	Channel	Tones	RU Index	Detector	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	2422	3	52T	37	AVG	16.18	30.00	-13.82	-3.20	12.98	36.02	-23.04
					PEAK	23.66	30.00	-6.34	-3.20	20.46	36.02	-15.56
				40	AVG	16.22	30.00	-13.78	-3.20	13.02	36.02	-23.00
					PEAK	22.91	30.00	-7.09	-3.20	19.71	36.02	-16.31
	2442	7	52T	44	AVG	16.27	30.00	-13.73	-3.20	13.07	36.02	-22.95
					PEAK	24.71	30.00	-5.29	-3.20	21.51	36.02	-14.51
				37	AVG	16.49	30.00	-13.51	-3.20	13.29	36.02	-22.73
					PEAK	23.43	30.00	-6.57	-3.20	20.23	36.02	-15.79
	2457	10	52T	40	AVG	16.19	30.00	-13.81	-3.20	12.99	36.02	-23.03
					PEAK	23.42	30.00	-6.58	-3.20	20.22	36.02	-15.80
				44	AVG	16.34	30.00	-13.66	-3.20	13.14	36.02	-22.88
					PEAK	24.07	30.00	-5.93	-3.20	20.87	36.02	-15.15
	2462	11	52T	37	AVG	16.30	30.00	-13.70	-3.20	13.10	36.02	-22.92
					PEAK	23.61	30.00	-6.39	-3.20	20.41	36.02	-15.61
				40	AVG	16.29	30.00	-13.71	-3.20	13.09	36.02	-22.93
					PEAK	24.14	30.00	-5.86	-3.20	20.94	36.02	-15.08
	2462	11	52T	44	AVG	16.25	30.00	-13.75	-3.20	13.05	36.02	-22.97
					PEAK	23.41	30.00	-6.59	-3.20	20.21	36.02	-15.81
				37	AVG	3.58	30.00	-26.42	-3.20	0.38	36.02	-35.64
					PEAK	11.23	30.00	-18.77	-3.20	8.03	36.02	-27.99
	2462	11	52T	40	AVG	3.69	30.00	-26.31	-3.20	0.49	36.02	-35.53
					PEAK	11.45	30.00	-18.55	-3.20	8.25	36.02	-27.77
				44	AVG	2.90	30.00	-27.10	-3.20	-0.30	36.02	-36.32
					PEAK	10.75	30.00	-19.25	-3.20	7.55	36.02	-28.47

Table 7-18. Conducted Output Power Measurements SISO NORTH (52 Tones) 40MHz BW

FCC ID: C3K1995 IC: 3048A-1995	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 41 of 202

2.4GHz	Freq [MHz]	Channel	Tones	RU Index	Detector	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]	
	2412	1	106T	53	AVG	16.22	30.00	-13.78	-3.20	13.02	36.02	-23.00	
					PEAK	24.07	30.00	-5.93	-3.20	20.87	36.02	-15.15	
		2		54	AVG	16.12	30.00	-13.88	-3.20	12.92	36.02	-23.10	
					PEAK	24.15	30.00	-5.85	-3.20	20.95	36.02	-15.07	
	2417	2		53	AVG	17.49	30.00	-12.51	-3.20	14.29	36.02	-21.73	
					PEAK	24.99	30.00	-5.01	-3.20	21.79	36.02	-14.23	
		6		54	AVG	17.26	30.00	-12.74	-3.20	14.06	36.02	-21.96	
					PEAK	24.81	30.00	-5.19	-3.20	21.61	36.02	-14.41	
	2437	10		53	AVG	17.19	30.00	-12.81	-3.20	13.99	36.02	-22.03	
					PEAK	24.67	30.00	-5.33	-3.20	21.47	36.02	-14.55	
		11		54	AVG	17.36	30.00	-12.64	-3.20	14.16	36.02	-21.86	
					PEAK	24.53	30.00	-5.47	-3.20	21.33	36.02	-14.69	
	2457	11		53	AVG	17.47	30.00	-12.53	-3.20	14.27	36.02	-21.75	
					PEAK	25.02	30.00	-4.98	-3.20	21.82	36.02	-14.20	
		12		54	AVG	17.12	30.00	-12.88	-3.20	13.92	36.02	-22.10	
					PEAK	24.86	30.00	-5.14	-3.20	21.66	36.02	-14.36	
	2462	11		53	AVG	2.69	30.00	-27.31	-3.20	-0.51	36.02	-36.53	
					PEAK	10.74	30.00	-19.26	-3.20	7.54	36.02	-28.48	
		12		54	AVG	2.56	30.00	-27.44	-3.20	-0.64	36.02	-36.66	
					PEAK	9.97	30.00	-20.03	-3.20	6.77	36.02	-29.25	
	2467	12		53	AVG	2.87	30.00	-27.13	-3.20	-0.33	36.02	-36.35	
					PEAK	10.69	30.00	-19.31	-3.20	7.49	36.02	-28.53	
		13		54	AVG	2.98	30.00	-27.02	-3.20	-0.22	36.02	-36.24	
					PEAK	10.91	30.00	-19.09	-3.20	7.71	36.02	-28.31	
	2472	13		53	AVG	2.73	30.00	-27.27	-3.20	-0.47	36.02	-36.49	
					PEAK	10.46	30.00	-19.54	-3.20	7.26	36.02	-28.76	
		13		54	AVG	2.77	30.00	-27.23	-3.20	-0.43	36.02	-36.45	
					PEAK	10.29	30.00	-19.71	-3.20	7.09	36.02	-28.93	

Table 7-19. Conducted Output Power Measurements SISO NORTH (106 Tones) 20MHz BW


FCC ID: C3K1995 IC: 3048A-1995	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 42 of 202

2.4GHz	Freq [MHz]	Channel	Tones	RU Index	Detector	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	2422	3	106T	53	AVG	17.11	30.00	-12.89	-3.20	13.91	36.02	-22.11
					PEAK	24.51	30.00	-5.49	-3.20	21.31	36.02	-14.71
				54	AVG	17.13	30.00	-12.87	-3.20	13.93	36.02	-22.09
					PEAK	24.92	30.00	-5.08	-3.20	21.72	36.02	-14.30
		7	106T	56	AVG	17.27	30.00	-12.73	-3.20	14.07	36.02	-21.95
					PEAK	24.39	30.00	-5.61	-3.20	21.19	36.02	-14.83
				53	AVG	17.49	30.00	-12.51	-3.20	14.29	36.02	-21.73
					PEAK	25.26	30.00	-4.74	-3.20	22.06	36.02	-13.96
	2442	7	106T	54	AVG	17.21	30.00	-12.79	-3.20	14.01	36.02	-22.01
					PEAK	24.38	30.00	-5.62	-3.20	21.18	36.02	-14.84
				56	AVG	17.39	30.00	-12.61	-3.20	14.19	36.02	-21.83
					PEAK	24.85	30.00	-5.15	-3.20	21.65	36.02	-14.37
		10	106T	53	AVG	17.30	30.00	-12.70	-3.20	14.10	36.02	-21.92
					PEAK	24.45	30.00	-5.55	-3.20	21.25	36.02	-14.77
				54	AVG	17.18	30.00	-12.82	-3.20	13.98	36.02	-22.04
					PEAK	24.81	30.00	-5.19	-3.20	21.61	36.02	-14.41
	2457	10	106T	56	AVG	17.01	30.00	-12.99	-3.20	13.81	36.02	-22.21
					PEAK	23.99	30.00	-6.01	-3.20	20.79	36.02	-15.23
		11	106T	53	AVG	2.57	30.00	-27.43	-3.20	-0.63	36.02	-36.65
					PEAK	10.58	30.00	-19.42	-3.20	7.38	36.02	-28.64
				54	AVG	2.40	30.00	-27.60	-3.20	-0.80	36.02	-36.82
					PEAK	10.00	30.00	-20.00	-3.20	6.80	36.02	-29.22
		11	106T	56	AVG	2.46	30.00	-27.54	-3.20	-0.74	36.02	-36.76
					PEAK	10.11	30.00	-19.89	-3.20	6.91	36.02	-29.11

Table 7-20. Conducted Output Power Measurements SISO NORTH (106 Tones) 40MHz BW

2.4GHz	Freq [MHz]	Channel	Tones	RU Index	Detector	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	2412	1	242T	61	AVG	16.45	30.00	-13.55	-3.20	13.25	36.02	-22.77
					PEAK	23.98	30.00	-6.02	-3.20	20.78	36.02	-15.24
		2	242T	61	AVG	17.44	30.00	-12.56	-3.20	14.24	36.02	-21.78
					PEAK	24.31	30.00	-5.69	-3.20	21.11	36.02	-14.91
		6	242T	61	AVG	17.22	30.00	-12.78	-3.20	14.02	36.02	-22.00
					PEAK	24.11	30.00	-5.89	-3.20	20.91	36.02	-15.11
		8	242T	61	AVG	17.31	30.00	-12.69	-3.20	14.11	36.02	-21.91
					PEAK	24.19	30.00	-5.81	-3.20	20.99	36.02	-15.03
	2452	9	242T	61	AVG	15.34	30.00	-14.66	-3.20	12.14	36.02	-23.88
					PEAK	22.83	30.00	-7.17	-3.20	19.63	36.02	-16.39
		10	242T	61	AVG	13.15	30.00	-16.85	-3.20	9.95	36.02	-26.07
					PEAK	21.11	30.00	-8.89	-3.20	17.91	36.02	-18.11
		11	242T	61	AVG	6.52	30.00	-23.48	-3.20	3.32	36.02	-32.70
					PEAK	13.98	30.00	-16.02	-3.20	10.78	36.02	-25.24
		12	242T	61	AVG	6.65	30.00	-23.35	-3.20	3.45	36.02	-32.57
					PEAK	14.01	30.00	-15.99	-3.20	10.81	36.02	-25.21
		13	242T	61	AVG	6.73	30.00	-23.27	-3.20	3.53	36.02	-32.49
					PEAK	13.87	30.00	-16.13	-3.20	10.67	36.02	-25.35

Table 7-21. Conducted Output Power Measurements SISO NORTH (242 Tones) 20MHz BW


FCC ID: C3K1995 IC: 3048A-1995	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Microsoft	Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 43 of 202

2.4GHz	Freq [MHz]	Channel	Tones	RU Index	Detector	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]	
	2422	3	242T	61	AVG	17.47	30.00	-12.53	-3.20	14.27	36.02	-21.75	
					PEAK	24.56	30.00	-5.44	-3.20	21.36	36.02	-14.66	
		7		62	AVG	17.38	30.00	-12.62	-3.20	14.18	36.02	-21.84	
					PEAK	24.65	30.00	-5.35	-3.20	21.45	36.02	-14.57	
	2442	7		61	AVG	17.32	30.00	-12.68	-3.20	14.12	36.02	-21.90	
					PEAK	24.35	30.00	-5.65	-3.20	21.15	36.02	-14.87	
		9		62	AVG	17.41	30.00	-12.59	-3.20	14.21	36.02	-21.81	
					PEAK	24.66	30.00	-5.34	-3.20	21.46	36.02	-14.56	
	2452	9		61	AVG	15.51	30.00	-14.49	-3.20	12.31	36.02	-23.71	
					PEAK	23.10	30.00	-6.90	-3.20	19.90	36.02	-16.12	
		10		62	AVG	15.63	30.00	-14.37	-3.20	12.43	36.02	-23.59	
					PEAK	22.22	30.00	-7.78	-3.20	19.02	36.02	-17.00	
	2457	10		61	AVG	13.34	30.00	-16.66	-3.20	10.14	36.02	-25.88	
					PEAK	21.28	30.00	-8.72	-3.20	18.08	36.02	-17.94	
		11		62	AVG	13.28	30.00	-16.72	-3.20	10.08	36.02	-25.94	
					PEAK	20.50	30.00	-9.50	-3.20	17.30	36.02	-18.72	
	2462	11		61	AVG	6.64	30.00	-23.36	-3.20	3.44	36.02	-32.58	
					PEAK	14.48	30.00	-15.52	-3.20	11.28	36.02	-24.74	
		11		62	AVG	6.73	30.00	-23.27	-3.20	3.53	36.02	-32.49	
					PEAK	13.80	30.00	-16.20	-3.20	10.60	36.02	-25.42	

Table 7-22. Conducted Output Power Measurements SISO NORTH (242 Tones) 40MHz BW

2.4GHz	Freq [MHz]	Channel	Tones	RU Index	Detector	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	2422	3	484T	65	AVG	14.32	30.00	-15.68	-3.20	11.12	36.02	-24.90
					PEAK	22.31	30.00	-7.69	-3.20	19.11	36.02	-16.91
	2427	4	484T	65	AVG	14.49	30.00	-15.51	-3.20	11.29	36.02	-24.73
					PEAK	22.41	30.00	-7.59	-3.20	19.21	36.02	-16.81
	2432	5	484T	65	AVG	15.18	30.00	-14.82	-3.20	11.98	36.02	-24.04
					PEAK	23.15	30.00	-6.85	-3.20	19.95	36.02	-16.07
	2442	7	484T	65	AVG	15.34	30.00	-14.66	-3.20	12.14	36.02	-23.88
					PEAK	22.96	30.00	-7.04	-3.20	19.76	36.02	-16.26
	2447	8	484T	65	AVG	15.18	30.00	-14.82	-3.20	11.98	36.02	-24.04
					PEAK	22.83	30.00	-7.17	-3.20	19.63	36.02	-16.39
	2452	9	484T	65	AVG	15.25	30.00	-14.75	-3.20	12.05	36.02	-23.97
					PEAK	22.87	30.00	-7.13	-3.20	19.67	36.02	-16.35
	2457	10	484T	65	AVG	13.53	30.00	-16.47	-3.20	10.33	36.02	-25.69
					PEAK	20.99	30.00	-9.01	-3.20	17.79	36.02	-18.23
	2462	11	484T	65	AVG	8.46	30.00	-21.54	-3.20	5.26	36.02	-30.76
					PEAK	16.39	30.00	-13.61	-3.20	13.19	36.02	-22.83

Table 7-23. Conducted Output Power Measurements SISO NORTH (484 Tones) 40MHz BW


FCC ID: C3K1995 IC: 3048A-1995	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 44 of 202

2.4GHz	Freq [MHz]	Channel	Tones	RU Index	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
						South	North	MIMO						
						AVG	15.43	14.96	18.21	30.00	-11.79	1.38	19.59	36.02
2412	1	26T	0	AVG	PEAK	23.01	22.31	25.68	30.00	-4.32	1.38	27.07	36.02	-8.96
					PEAK	22.60	22.93	25.78	30.00	-4.22	1.38	27.16	36.02	-8.86
	6	26T	4	AVG	PEAK	21.89	22.76	25.36	30.00	-4.64	1.38	26.74	36.02	-9.28
					PEAK	22.36	22.53	25.46	30.00	-4.54	1.38	26.84	36.02	-9.18
	2437	26T	8	AVG	PEAK	22.56	22.92	25.75	30.00	-4.25	1.38	27.13	36.02	-8.89
					PEAK	22.98	22.89	25.95	30.00	-4.05	1.38	27.33	36.02	-8.69
	2457	10	0	AVG	PEAK	22.78	22.03	25.43	30.00	-4.57	1.38	26.81	36.02	-9.21
					PEAK	23.67	21.32	25.66	30.00	-4.34	1.38	27.04	36.02	-8.98
	2462	11	4	AVG	PEAK	3.56	3.98	6.79	30.00	-23.21	1.38	8.17	36.02	-27.85
					PEAK	3.78	4.01	6.91	30.00	-23.09	1.38	8.29	36.02	-27.73
	2467	12	8	AVG	PEAK	4.02	3.78	6.91	30.00	-23.09	1.38	8.29	36.02	-27.73
					PEAK	3.78	3.85	6.83	30.00	-23.17	1.38	8.21	36.02	-27.81
	2472	13	0	AVG	PEAK	4.22	4.14	7.19	30.00	-22.81	1.38	8.57	36.02	-27.45
					PEAK	4.42	4.11	7.28	30.00	-22.72	1.38	8.66	36.02	-27.36
	2472	13	4	AVG	PEAK	5.15	4.73	7.96	30.00	-22.04	1.38	9.34	36.02	-26.68
					PEAK	4.28	4.41	7.36	30.00	-22.64	1.38	8.74	36.02	-35.09
			8	AVG	PEAK	3.59	3.32	6.45	30.00	-30.45	1.38	7.88	36.02	-27.28

Table 7-24. Conducted Output Power Measurements MIMO (26 Tones) 20MHz BW

2.4GHz	Freq [MHz]	Channel	Tones	RU Index	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
						South	North	MIMO						
						AVG	15.25	14.34	17.83	30.00	-12.17	1.38	19.21	36.02
2422	3	26T	0	AVG	PEAK	22.83	21.87	25.39	30.00	-4.61	1.38	26.77	36.02	-9.25
					PEAK	22.19	22.91	25.58	30.00	-4.42	1.38	26.96	36.02	-9.06
	2442	7	8	AVG	PEAK	22.51	22.74	25.64	30.00	-4.36	1.38	27.02	36.02	-9.00
					PEAK	22.89	22.76	25.84	30.00	-4.16	1.38	27.22	36.02	-8.80
			17	AVG	PEAK	22.36	22.54	25.46	30.00	-4.54	1.38	26.84	36.02	-9.18
					PEAK	22.63	22.99	25.82	30.00	-4.18	1.38	27.20	36.02	-8.82
	2457	10	0	AVG	PEAK	22.71	22.67	25.70	30.00	-4.30	1.38	27.08	36.02	-8.94
					PEAK	22.64	22.14	25.41	30.00	-4.59	1.38	26.79	36.02	-9.23
			8	AVG	PEAK	22.87	22.48	25.69	30.00	-4.31	1.38	27.07	36.02	-8.95
					PEAK	3.61	4.03	6.84	30.00	-23.16	1.38	8.22	36.02	-27.80
	2462	11	8	AVG	PEAK	3.59	3.39	6.50	30.00	-23.50	1.38	7.88	36.02	-28.14
					PEAK	3.61	4.12	6.88	30.00	-23.12	1.38	8.26	36.02	-35.37
			17	AVG	PEAK	3.83	3.51	-0.66	30.00	-30.66	1.38	0.72	36.02	-35.30

Table 7-25. Conducted Output Power Measurements MIMO (26 Tones) 40MHz BW

FCC ID: C3K1995 IC: 3048A-1995	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Microsoft	Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 45 of 202

2.4GHz	Freq [MHz]	Channel	Tones	RU Index	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
						South	North	MIMO						
						AVG	16.33	16.05	19.20	30.00	-10.80	1.38	20.58	36.02
2412	1	52T	37	PEAK	23.79	23.51	26.66	30.00	-3.34	1.38	28.04	36.02	-7.98	
				AVG	16.29	16.36	19.34	30.00	-10.66	1.38	20.72	36.02	-15.30	
			38	PEAK	23.91	24.04	26.99	30.00	-3.01	1.38	28.37	36.02	-7.65	
				AVG	15.54	16.39	19.00	30.00	-11.00	1.38	20.38	36.02	-15.64	
	2437	6	37	PEAK	23.80	24.37	27.10	30.00	-2.90	1.38	28.49	36.02	-7.54	
				AVG	16.21	16.44	19.34	30.00	-10.66	1.38	20.72	36.02	-15.30	
			38	PEAK	24.18	24.44	27.32	30.00	-2.68	1.38	28.70	36.02	-7.32	
				AVG	16.38	16.17	19.29	30.00	-10.71	1.38	20.67	36.02	-15.35	
2457	10	52T	37	PEAK	24.19	23.82	27.02	30.00	-2.98	1.38	28.40	36.02	-7.62	
				AVG	16.30	16.31	19.32	30.00	-10.68	1.38	20.70	36.02	-15.32	
			38	PEAK	23.87	24.06	26.98	30.00	-3.02	1.38	28.36	36.02	-7.66	
				AVG	16.45	15.98	19.23	30.00	-10.77	1.38	20.61	36.02	-15.41	
	2462	11	37	PEAK	23.98	23.02	26.54	30.00	-3.46	1.38	27.92	36.02	-8.10	
				AVG	16.11	15.78	18.96	30.00	-11.04	1.38	20.34	36.02	-15.68	
			38	PEAK	23.81	24.03	26.93	30.00	-3.07	1.38	28.31	36.02	-7.71	
				AVG	16.09	15.54	18.83	30.00	-11.17	1.38	20.21	36.02	-15.81	
2467	12	52T	37	PEAK	23.78	24.11	26.96	30.00	-3.04	1.38	28.34	36.02	-7.68	
				AVG	2.96	2.15	5.58	30.00	-24.42	1.38	6.96	36.02	-29.06	
			38	PEAK	10.61	10.19	13.42	30.00	-16.58	1.38	14.80	36.02	-21.22	
				AVG	2.95	2.56	5.77	30.00	-24.23	1.38	7.15	36.02	-28.87	
	2472	13	37	PEAK	10.59	10.42	13.52	30.00	-16.48	1.38	14.90	36.02	-21.12	
				AVG	2.78	2.85	5.83	30.00	-24.17	1.38	7.21	36.02	-28.81	
			38	PEAK	10.87	10.37	13.64	30.00	-16.36	1.38	15.02	36.02	-21.00	
				AVG	2.94	2.64	5.80	30.00	-24.20	1.38	7.18	36.02	-28.84	
2467	12	52T	37	PEAK	10.56	10.42	13.50	30.00	-16.50	1.38	14.88	36.02	-21.14	
				AVG	2.87	2.56	5.73	30.00	-24.27	1.38	7.11	36.02	-28.91	
			38	PEAK	10.98	10.45	13.73	30.00	-16.27	1.38	15.11	36.02	-20.91	
				AVG	2.85	2.59	5.73	30.00	-24.27	1.38	7.11	36.02	-28.91	
	2472	13	37	PEAK	10.18	10.56	13.38	30.00	-16.62	1.38	14.77	36.02	-21.26	
				AVG	-0.81	-1.12	2.05	30.00	-27.95	1.38	3.43	36.02	-32.59	
			38	PEAK	7.14	6.67	9.92	30.00	-20.08	1.38	11.30	36.02	-24.72	
				AVG	-0.77	-1.39	1.94	30.00	-28.06	1.38	3.32	36.02	-32.70	
2472	13	52T	38	PEAK	7.12	6.42	9.79	30.00	-20.21	1.38	11.18	36.02	-24.85	
				AVG	-0.77	-0.57	2.34	30.00	-27.66	1.38	3.72	36.02	-32.30	
			40	PEAK	6.77	7.29	10.05	30.00	-19.95	1.38	11.43	36.02	-24.59	

Table 7-26. Conducted Output Power Measurements MIMO (52 Tones) 20MHz BW

2.4GHz	Freq [MHz]	Channel	Tones	RU Index	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
						South	North	MIMO						
						AVG	16.15	15.81	18.99	30.00	-11.01	1.38	20.37	36.02
2422	3	52	37	PEAK	23.65	23.56	26.62	30.00	-3.38	1.38	28.00	36.02	-8.02	
				AVG	15.98	16.44	19.23	30.00	-10.77	1.38	20.61	36.02	-15.41	
			40	PEAK	23.93	24.37	27.17	30.00	-2.83	1.38	28.55	36.02	-7.47	
				AVG	16.46	16.47	19.48	30.00	-10.52	1.38	20.86	36.02	-15.16	
	2442	7	37	PEAK	23.89	23.49	26.70	30.00	-3.30	1.38	28.09	36.02	-7.93	
				AVG	16.03	16.37	19.21	30.00	-10.79	1.38	20.59	36.02	-15.43	
			40	PEAK	23.42	24.02	26.74	30.00	-3.26	1.38	28.12	36.02	-7.90	
				AVG	15.95	16.48	19.23	30.00	-10.77	1.38	20.61	36.02	-15.41	
2457	10	52	37	PEAK	23.89	23.22	26.58	30.00	-3.42	1.38	27.96	36.02	-8.06	
				AVG	16.16	16.12	19.15	30.00	-10.85	1.38	20.53	36.02	-15.49	
			40	PEAK	23.09	24.28	26.74	30.00	-3.26	1.38	28.12	36.02	-7.90	
				AVG	16.44	14.93	18.76	30.00	-11.24	1.38	20.14	36.02	-15.88	
	2462	11	37	PEAK	23.01	21.47	25.32	30.00	-4.68	1.38	26.70	36.02	-9.32	
				AVG	1.79	2.09	4.95	30.00	-25.05	1.38	6.33	36.02	-29.69	
			40	PEAK	9.24	9.81	12.54	30.00	-17.46	1.38	13.93	36.02	-22.10	
				AVG	2.03	1.79	4.92	30.00	-25.08	1.38	6.30	36.02	-29.72	
			44	PEAK	9.76	9.55	12.67	30.00	-17.33	1.38	14.05	36.02	-21.97	
				AVG	1.97	2.66	5.34	30.00	-24.66	1.38	6.72	36.02	-29.30	

Table 7-27. Conducted Output Power Measurements MIMO (52 Tones) 40MHz BW

FCC ID: C3K1995	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset	Page 46 of 202

2.4GHz	Freq [MHz]	Channel	Tones	RU Index	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
						South	North	MIMO						
						AVG	16.29	16.38	19.35	30.00	-10.65	1.38	20.73	36.02
2412	1	106T	53	PEAK	24.06	24.11	27.10	30.00	-2.90	1.38	28.48	36.02	-7.54	
				AVG	15.73	16.25	19.01	30.00	-10.99	1.38	20.39	36.02	-15.63	
	2417		54	PEAK	23.84	23.99	26.93	30.00	-3.07	1.38	28.31	36.02	-7.71	
				AVG	17.31	16.01	19.72	30.00	-10.28	1.38	21.10	36.02	-14.92	
2437	6	106T	53	PEAK	25.01	13.98	25.34	30.00	-4.66	1.38	26.72	36.02	-9.30	
				AVG	17.29	17.26	20.29	30.00	-9.71	1.38	21.67	36.02	-14.35	
	2457		54	PEAK	25.00	24.81	27.92	30.00	-2.08	1.38	29.30	36.02	-6.72	
				AVG	17.13	16.77	19.96	30.00	-10.04	1.38	21.34	36.02	-14.68	
2462	10	106T	53	PEAK	24.54	23.87	27.23	30.00	-2.77	1.38	28.61	36.02	-7.41	
				AVG	17.40	17.10	20.26	30.00	-9.74	1.38	21.64	36.02	-14.38	
	2467		54	PEAK	25.05	24.21	27.66	30.00	-2.34	1.38	29.04	36.02	-6.98	
				AVG	17.03	16.05	19.58	30.00	-10.42	1.38	20.96	36.02	-15.06	
2472	11	106T	53	PEAK	24.77	24.03	27.43	30.00	-2.57	1.38	28.81	36.02	-7.21	
				AVG	17.21	16.64	19.94	30.00	-10.06	1.38	21.33	36.02	-14.70	
	2462		54	PEAK	24.89	24.23	27.58	30.00	-2.42	1.38	28.96	36.02	-7.06	
				AVG	2.54	2.98	5.78	30.00	-24.22	1.38	7.16	36.02	-28.86	
2467	12	106T	53	PEAK	10.56	10.78	13.68	30.00	-16.32	1.38	15.06	36.02	-20.96	
				AVG	2.74	2.99	5.88	30.00	-24.12	1.38	7.26	36.02	-28.76	
	2472		54	PEAK	10.45	10.75	13.61	30.00	-16.39	1.38	14.99	36.02	-21.03	
				AVG	2.29	1.82	5.07	30.00	-24.93	1.38	6.45	36.02	-29.57	
2472	13	106T	53	PEAK	10.13	9.78	12.97	30.00	-17.03	1.38	14.35	36.02	-21.67	
				AVG	2.34	1.81	5.09	30.00	-24.91	1.38	6.47	36.02	-29.55	
	2472		54	PEAK	9.86	10.21	13.05	30.00	-16.95	1.38	14.43	36.02	-21.59	

Table 7-28. Conducted Output Power Measurements MIMO (106 Tones) 20MHz BW

2.4GHz	Freq [MHz]	Channel	Tones	RU Index	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
						South	North	MIMO						
						AVG	17.07	16.79	19.94	30.00	-10.06	1.38	21.32	36.02
2422	3	106T	53	PEAK	24.77	24.43	27.61	30.00	-2.39	1.38	28.99	36.02	-7.03	
				AVG	17.23	17.26	20.26	30.00	-9.74	1.38	21.64	36.02	-14.38	
	2442		54	PEAK	25.06	25.15	28.12	30.00	-1.88	1.38	29.50	36.02	-6.52	
				AVG	17.49	17.38	20.45	30.00	-9.55	1.38	21.83	36.02	-14.19	
2457	7	106T	53	PEAK	24.95	24.34	27.67	30.00	-2.33	1.38	29.05	36.02	-6.97	
				AVG	17.49	20.29	30.00	-9.71	1.38	21.67	36.02	-14.35		
	2462		54	PEAK	24.43	25.12	27.80	30.00	-2.20	1.38	29.18	36.02	-6.84	
				AVG	17.38	17.29	20.35	30.00	-9.65	1.38	21.73	36.02	-14.29	
2462	10	106T	56	PEAK	24.66	24.74	27.71	30.00	-2.29	1.38	29.09	36.02	-6.93	
				AVG	17.41	17.08	20.26	30.00	-9.74	1.38	21.64	36.02	-14.38	
	2462		53	PEAK	24.87	24.15	27.54	30.00	-2.46	1.38	28.92	36.02	-7.10	
				AVG	17.25	17.25	20.26	30.00	-9.74	1.38	21.64	36.02	-14.38	
2472	11	106T	56	PEAK	24.67	24.25	27.48	30.00	-2.52	1.38	28.86	36.02	-7.16	
				AVG	17.38	17.35	20.38	30.00	-9.62	1.38	21.76	36.02	-14.26	
	2462		54	PEAK	24.78	24.54	27.67	30.00	-2.33	1.38	29.05	36.02	-6.97	
				AVG	2.85	2.99	5.93	30.00	-24.07	1.38	7.31	36.02	-28.71	
2462	11	106T	53	PEAK	10.86	10.83	13.86	30.00	-16.14	1.38	15.24	36.02	-20.78	
				AVG	2.71	2.62	5.68	30.00	-24.32	1.38	7.06	36.02	-28.96	
	2462		56	PEAK	10.44	10.10	13.28	30.00	-16.72	1.38	14.66	36.02	-21.36	
				AVG	2.79	2.98	5.90	30.00	-24.10	1.38	7.28	36.02	-28.74	

Table 7-29. Conducted Output Power Measurements MIMO (106 Tones) 40MHz BW

FCC ID: C3K1995 IC: 3048A-1995	 PCTEST [®] Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Microsoft	Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 47 of 202

2.4GHz	Freq [MHz]	Channel	Tones	RU Index	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
						South	North	MIMO						
						AVG	16.25	16.44	19.36	30.00	-10.64	1.38	20.74	36.02
2412	2412	1	242T	61	PEAK	24.03	24.01	27.03	30.00	-2.97	1.38	28.41	36.02	-7.61
					AVG	17.22	16.56	19.91	30.00	-10.09	1.38	21.29	36.02	-14.73
2417	2417	2	242T	61	PEAK	24.19	24.03	27.12	30.00	-2.88	1.38	28.50	36.02	-7.52
					AVG	17.12	17.28	20.21	30.00	-9.79	1.38	21.59	36.02	-14.43
2437	2437	6	242T	61	PEAK	24.51	24.30	27.42	30.00	-2.58	1.38	28.80	36.02	-7.22
					AVG	17.45	17.35	20.41	30.00	-9.59	1.38	21.79	36.02	-14.23
2452	2452	9	242T	61	PEAK	24.01	24.15	27.09	30.00	-2.91	1.38	28.47	36.02	-7.55
					AVG	14.35	13.98	17.18	30.00	-12.82	1.38	18.56	36.02	-17.46
2457	2457	10	242T	61	PEAK	22.04	21.98	25.02	30.00	-4.98	1.38	26.40	36.02	-9.62
					AVG	4.97	5.34	8.17	30.00	-21.83	1.38	9.55	36.02	-26.47
2462	2462	11	242T	61	PEAK	12.41	12.76	15.60	30.00	-14.40	1.38	16.98	36.02	-19.04
					AVG	4.82	5.13	7.99	30.00	-22.01	1.38	9.37	36.02	-26.65
2467	2467	12	242T	61	PEAK	12.11	12.57	15.36	30.00	-14.64	1.38	16.74	36.02	-19.28
					AVG	4.62	5.04	7.85	30.00	-22.15	1.38	9.23	36.02	-26.79
2472	2472	13	242T	61	PEAK	12.18	12.35	15.28	30.00	-14.72	1.38	16.66	36.02	-19.36

Table 7-30. Conducted Output Power Measurements MIMO (242 Tones) 20MHz BW

2.4GHz	Freq [MHz]	Channel	Tones	RU Index	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
						South	North	MIMO						
						AVG	17.45	17.15	20.31	30.00	-9.69	1.38	21.69	36.02
2422	2422	3	242T	61	PEAK	23.98	24.45	27.23	30.00	-2.77	1.38	28.61	36.02	-7.41
					AVG	17.15	17.31	20.24	30.00	-9.76	1.38	21.62	36.02	-14.40
2442	2442	7	242T	61	PEAK	24.96	24.53	27.76	30.00	-2.24	1.38	29.14	36.02	-6.88
					AVG	17.08	17.42	20.26	30.00	-9.74	1.38	21.64	36.02	-14.38
2452	2452	9	242T	61	PEAK	24.38	24.23	27.32	30.00	-2.68	1.38	28.70	36.02	-7.32
					AVG	17.11	17.08	20.11	30.00	-9.89	1.38	21.49	36.02	-14.53
2457	2457	10	242T	61	PEAK	24.98	24.35	27.69	30.00	-2.31	1.38	29.07	36.02	-6.95
					AVG	17.28	17.25	20.28	30.00	-9.72	1.38	21.66	36.02	-14.36
2457	2457	10	242T	62	PEAK	21.58	21.69	24.65	30.00	-5.35	1.38	26.03	36.02	-9.99
					AVG	14.17	14.00	17.10	30.00	-12.90	1.38	18.48	36.02	-17.54
2462	2462	11	242T	61	PEAK	21.78	21.68	24.74	30.00	-5.26	1.38	26.12	36.02	-9.90
					AVG	4.77	5.44	8.13	30.00	-21.87	1.38	9.51	36.02	-26.51
2462	2462	11	242T	62	PEAK	12.12	12.89	15.53	30.00	-14.47	1.38	16.91	36.02	-19.11

Table 7-31. Conducted Output Power Measurements MIMO (242 Tones) 40MHz BW

2.4GHz	Freq [MHz]	Channel	Tones	RU Index	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
						South	North	MIMO						
						AVG	14.45	13.98	17.23	30.00	-12.77	1.38	18.61	36.02
2422	2422	3	484T	65	PEAK	21.78	22.18	24.99	30.00	-5.01	1.38	26.38	36.02	-9.64
					AVG	14.39	14.11	17.26	30.00	-12.74	1.38	18.64	36.02	-17.38
2427	2427	4	484T	65	PEAK	22.20	22.25	25.24	30.00	-4.76	1.38	26.62	36.02	-9.40
					AVG	15.38	15.31	18.36	30.00	-11.64	1.38	19.74	36.02	-16.28
2432	2432	5	484T	65	PEAK	22.46	22.78	25.63	30.00	-4.37	1.38	27.01	36.02	-9.01
					AVG	15.41	15.08	18.26	30.00	-11.74	1.38	19.64	36.02	-16.38
2442	2442	7	484T	65	PEAK	22.78	22.98	25.89	30.00	-4.11	1.38	27.27	36.02	-8.75
					AVG	15.48	14.88	18.20	30.00	-11.80	1.38	19.58	36.02	-16.44
2447	2447	8	484T	65	PEAK	22.87	22.78	25.84	30.00	-4.16	1.38	27.22	36.02	-8.80
					AVG	14.37	14.02	17.21	30.00	-12.79	1.38	18.59	36.02	-17.43
2452	2452	9	484T	65	PEAK	22.11	22.56	25.35	30.00	-4.65	1.38	26.73	36.02	-9.29
					AVG	13.78	13.64	16.72	30.00	-13.28	1.38	18.10	36.02	-17.92
2457	2457	10	484T	65	PEAK	22.09	21.09	24.63	30.00	-5.37	1.38	26.01	36.02	-10.01
					AVG	9.19	9.26	12.24	30.00	-17.76	1.38	13.62	36.02	-22.40
2462	2462	11	484T	65	PEAK	17.67	16.44	20.11	30.00	-9.89	1.38	21.49	36.02	-14.53

Table 7-32. Conducted Output Power Measurements MIMO (484 Tones) 40MHz BW

FCC ID: C3K1995 IC: 3048A-1995	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Microsoft	Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 48 of 202

Note:

Per ANSI C63.10-2013 and KDB 662911 D01 v02r01 Section E)1), the conducted powers at South Antenna and North Antenna were first measured separately during MIMO transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Sample MIMO Calculation:

At 2412MHz the average conducted output power was measured to be 17.73 dBm for South Antenna and 17.41 dBm for North Antenna.

South + North = MIMO

$$(17.73 \text{ dBm} + 17.41 \text{ dBm}) = (59.29 \text{ mW} + 55.08 \text{ mW}) = 114.37 \text{ mW} = 20.58 \text{ dBm}$$

FCC ID: C3K1995 IC: 3048A-1995	 PCTEST[®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 Microsoft	Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 49 of 202

7.4 Power Spectral Density

§15.247(e); RSS-247 [5.2]

Test Overview and Limit

The peak power density is measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates, tones configurations, and RU indices were investigated and the worst case configuration results are reported in this section.

The maximum permissible power spectral density is 8 dBm in any 3 kHz band.

Test Procedure Used

ANSI C63.10-2013 – Section 11.10.2 Method PKPSD

KDB 558074 D01 v05r02 – Section 8.4 DTS Maximum Power Spectral Density level in the fundamental emission

ANSI C63.10-2013 – Section 14.3.2.2 Measure-and-Sum Technique

KDB 662911 D01 v02r01 – Section E)2) Measure-and-Sum Technique

Test Settings

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3kHz
4. VBW = 1MHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup

FCC ID: C3K1995 IC: 3048A-1995	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Microsoft	Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 50 of 202

Test Notes


1. Based on preliminary measurements, it was determined that, of all of the tone configurations, the 26T configuration produced the worst case power spectral density measurement for partial loaded case. Therefore, only the 26 Tone configuration and 242 Tone data is included in this section.
2. The power spectral density for each channel was measured with the RU index showing the highest conducted power.

FCC ID: C3K1995 IC: 3048A-1995	 PCTEST [®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset	Page 51 of 202


SISO SOUTH Power Spectral Density Measurements


Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2412	1	ax	26T	MCS0	-1.23	8.00	-9.23	Pass
2437	6	ax	26T	MCS0	-2.54	8.00	-10.54	Pass
2462	11	ax	26T	MCS0	-1.59	8.00	-9.59	Pass
2412	1	ax	242T	MCS0	-7.14	8.00	-15.14	Pass
2437	6	ax	242T	MCS0	-7.31	8.00	-15.31	Pass
2462	11	ax	242T	MCS0	-6.58	8.00	-14.58	Pass

Table 7-33. Conducted Power Density Measurements SISO SOUTH 20MHz BW

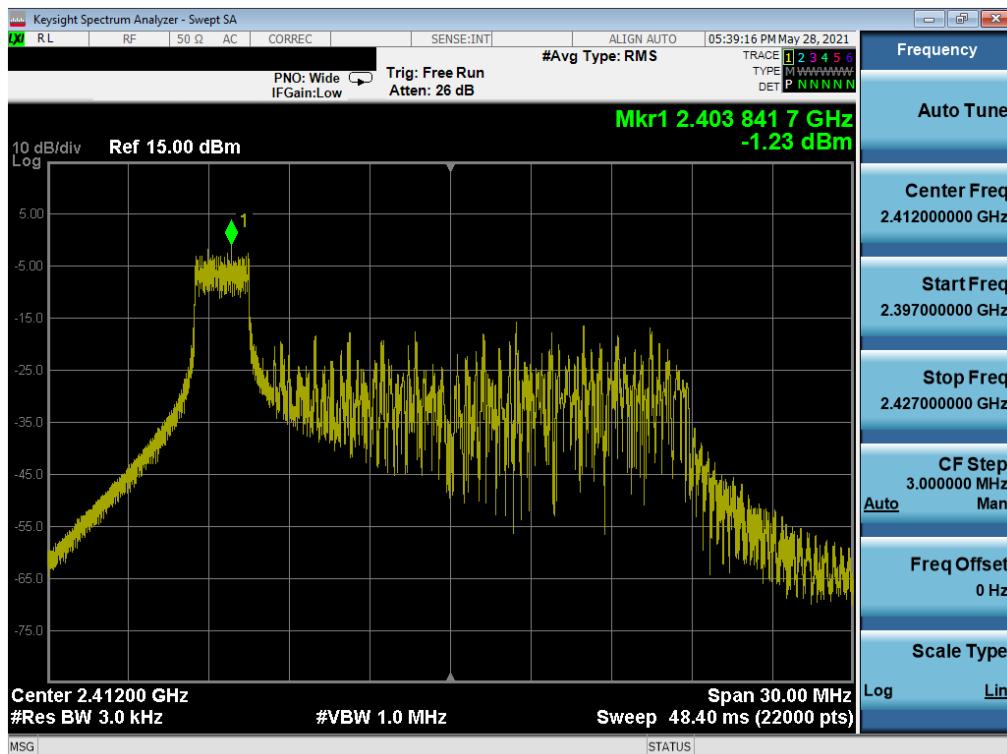


Plot 7-25. Power Spectral Density Plot SISO SOUTH (802.11ax 20MHz BW OFDMA – 26 Tones – Ch. 1)

FCC ID: C3K1995 IC: 3048A-1995	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Microsoft	Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 52 of 202

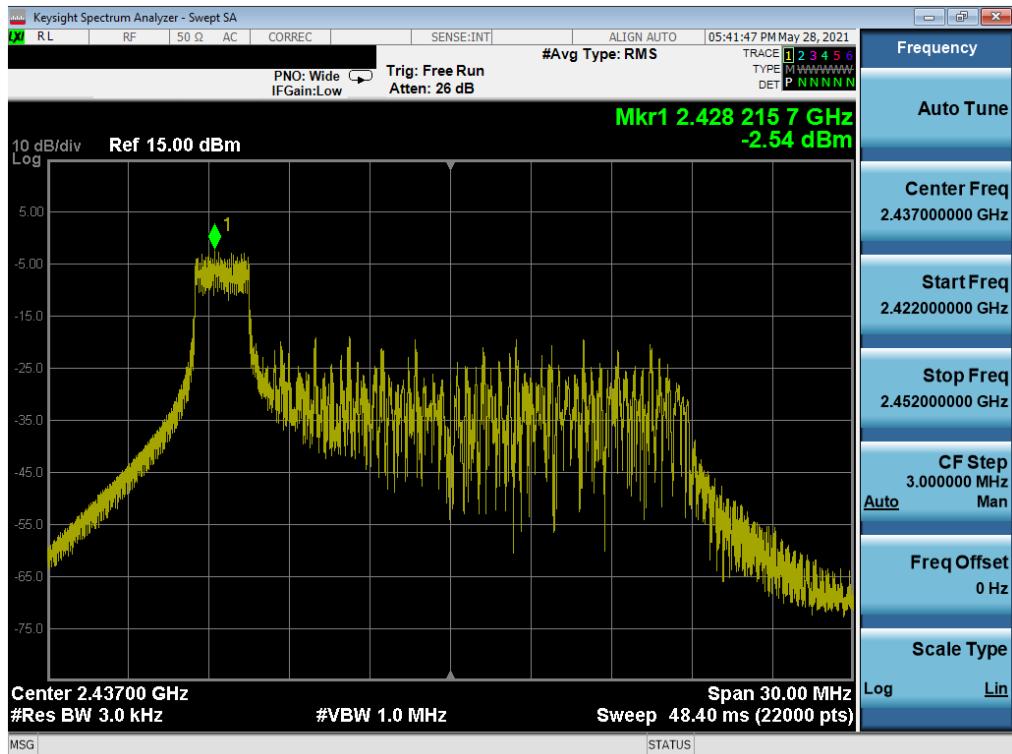


Plot 7-26. Power Spectral Density Plot SISO SOUTH (802.11ax 20MHz BW OFDMA – 26 Tones – Ch. 6)

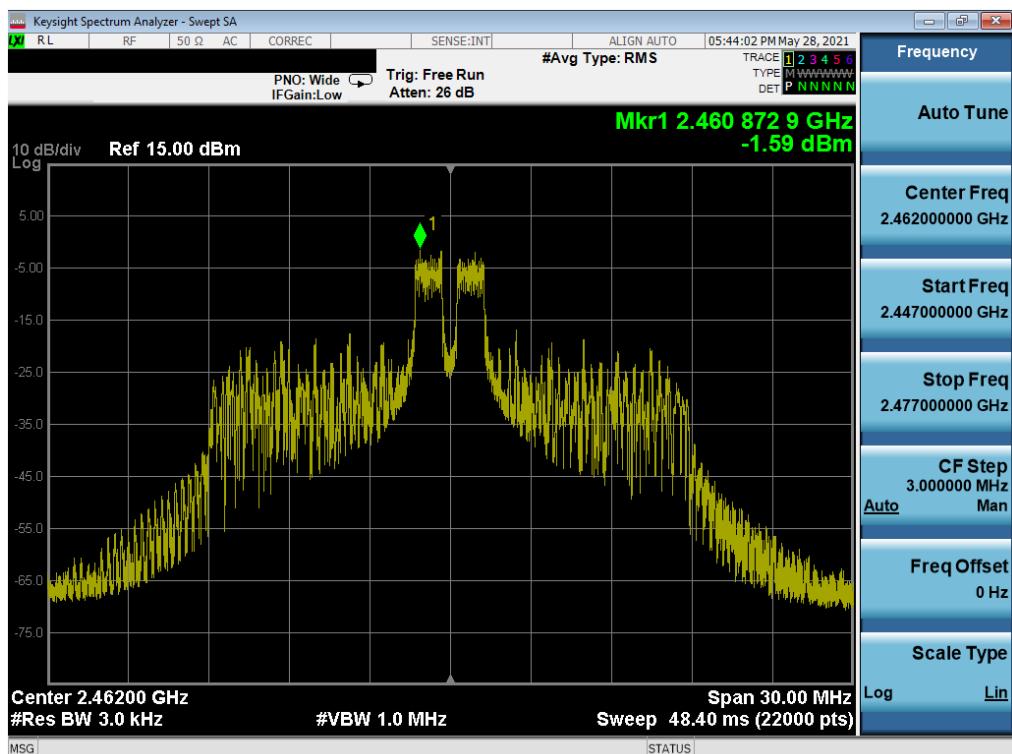


Plot 7-27. Power Spectral Density Plot SISO SOUTH (802.11ax 20MHz BW OFDMA – 26 Tones – Ch. 11)

FCC ID: C3K1995 IC: 3048A-1995	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset	Page 53 of 202

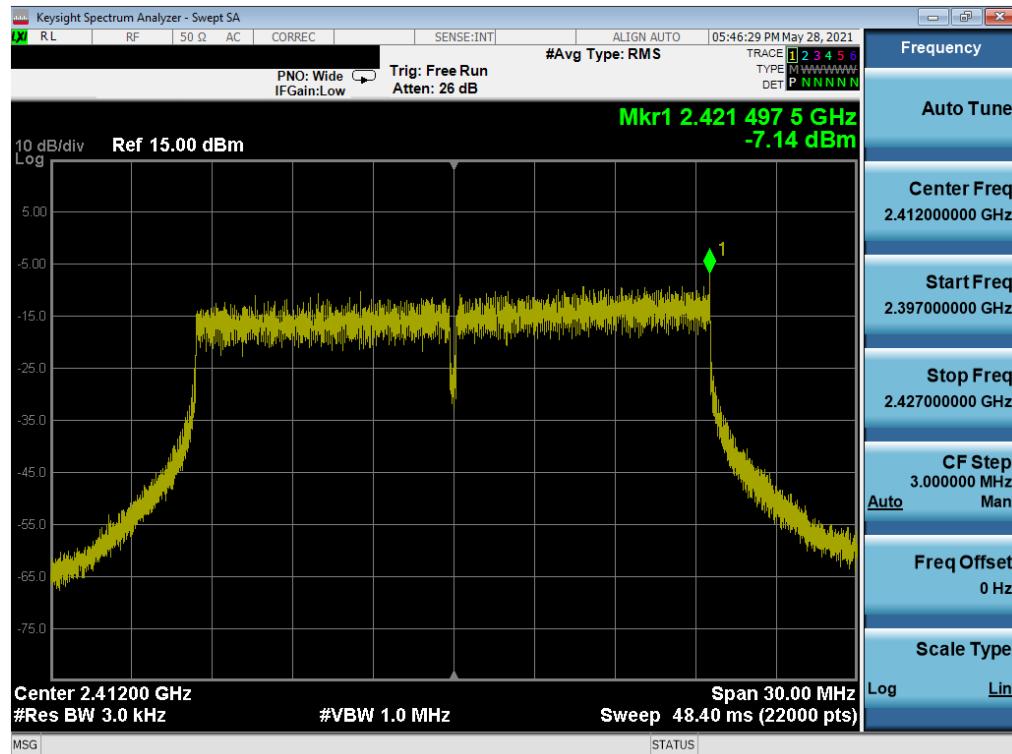


Plot 7-28. Power Spectral Density Plot SISO SOUTH (802.11ax 20MHz BW OFDMA – 242 Tones – Ch. 1)

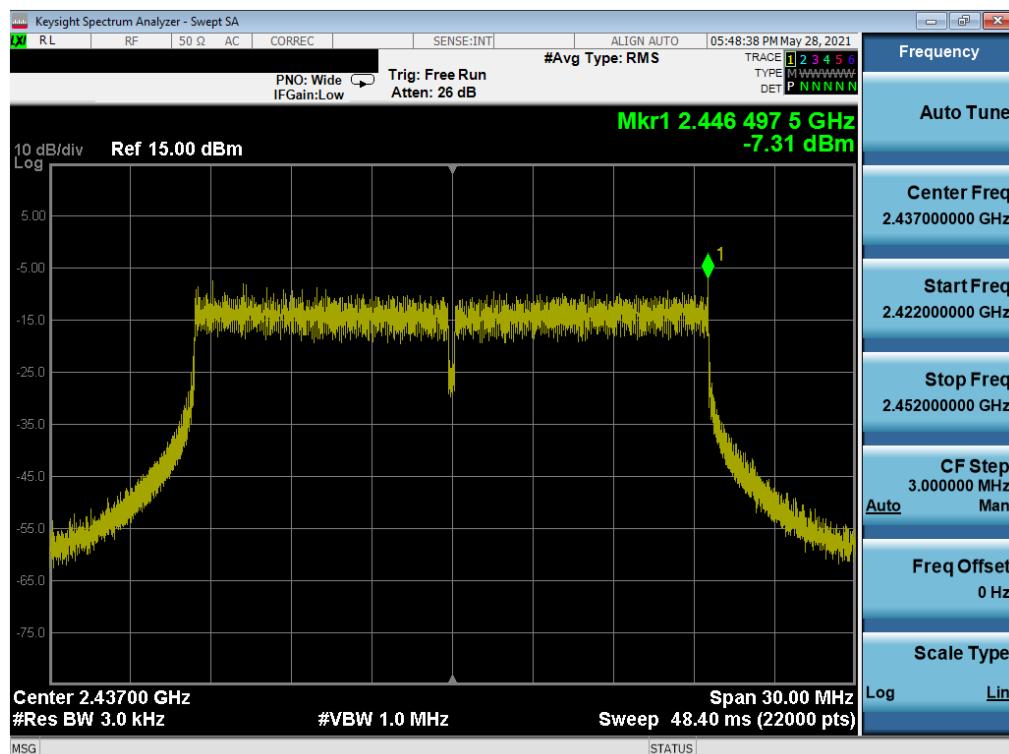

Plot 7-29. Power Spectral Density Plot SISO SOUTH (802.11ax 20MHz BW OFDMA – 242 Tones – Ch. 6)

FCC ID: C3K1995 IC: 3048A-1995	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset	Page 54 of 202

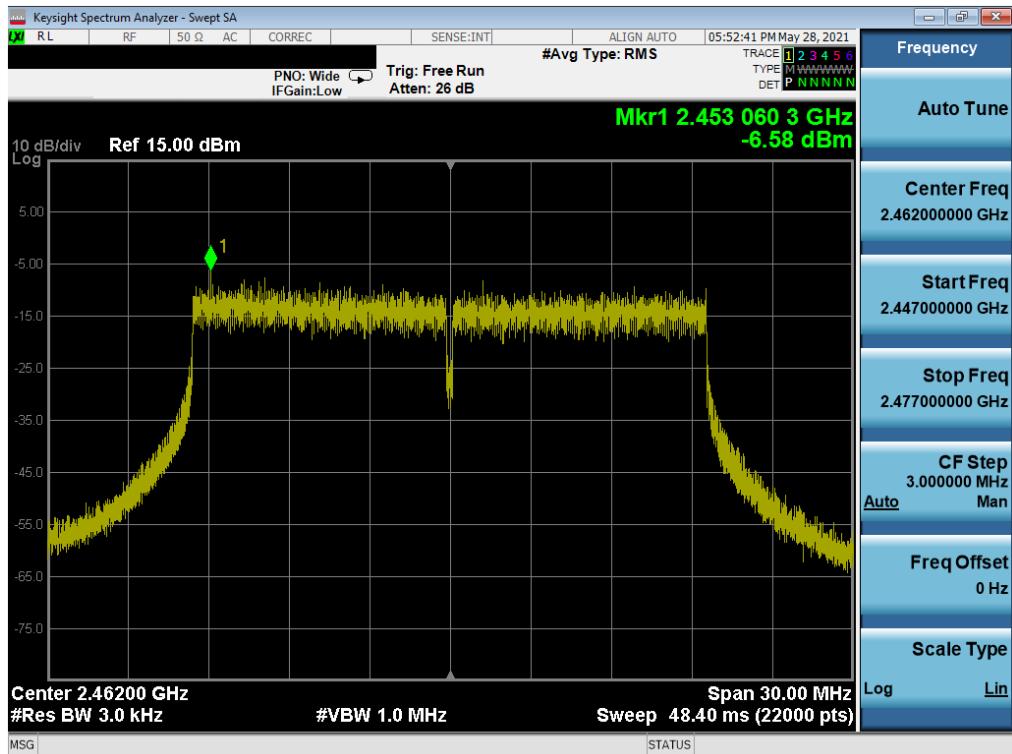


Plot 7-30. Power Spectral Density Plot SISO SOUTH (802.11ax 20MHz BW OFDMA – 242 Tones – Ch. 11)

FCC ID: C3K1995 IC: 3048A-1995	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 55 of 202



Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2422	3	ax	26T	MCS0	-1.95	8.00	-9.95	Pass
2442	7	ax	26T	MCS0	-2.86	8.00	-10.86	Pass
2462	11	ax	26T	MCS0	-13.79	8.00	-21.79	Pass
2422	3	ax	484T	484T	-13.32	8.00	-21.32	Pass
2442	7	ax	484T	484T	-11.52	8.00	-19.52	Pass
2462	11	ax	484T	484T	-19.32	8.00	-27.32	Pass


Table 7-34. Conducted Power Density Measurements SISO SOUTH 40MHz BW


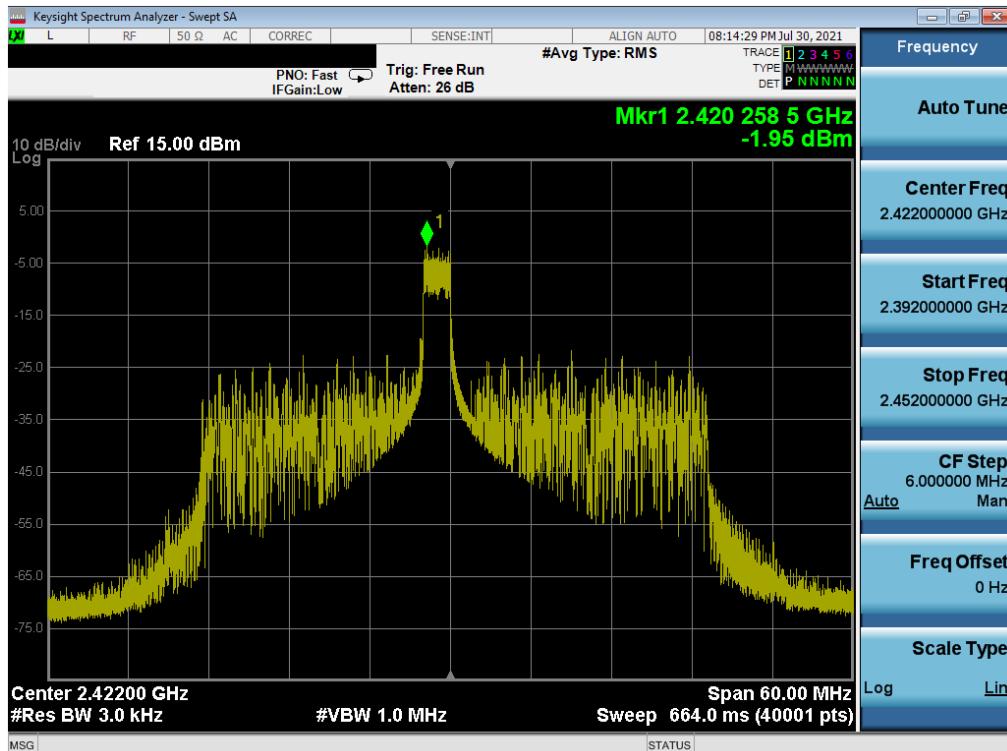


Plot 7-31. Power Spectral Density Plot SISO SOUTH (802.11ax 40MHz BW OFDMA – 26 Tones – Ch. 3)


FCC ID: C3K1995 IC: 3048A-1995	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 56 of 202

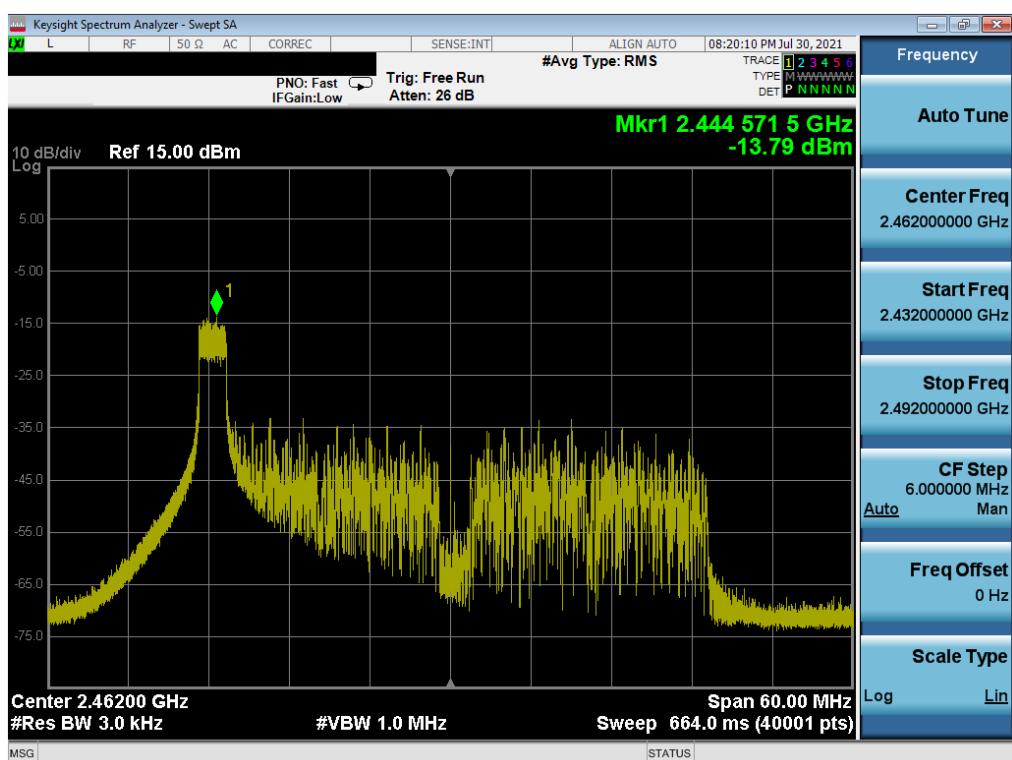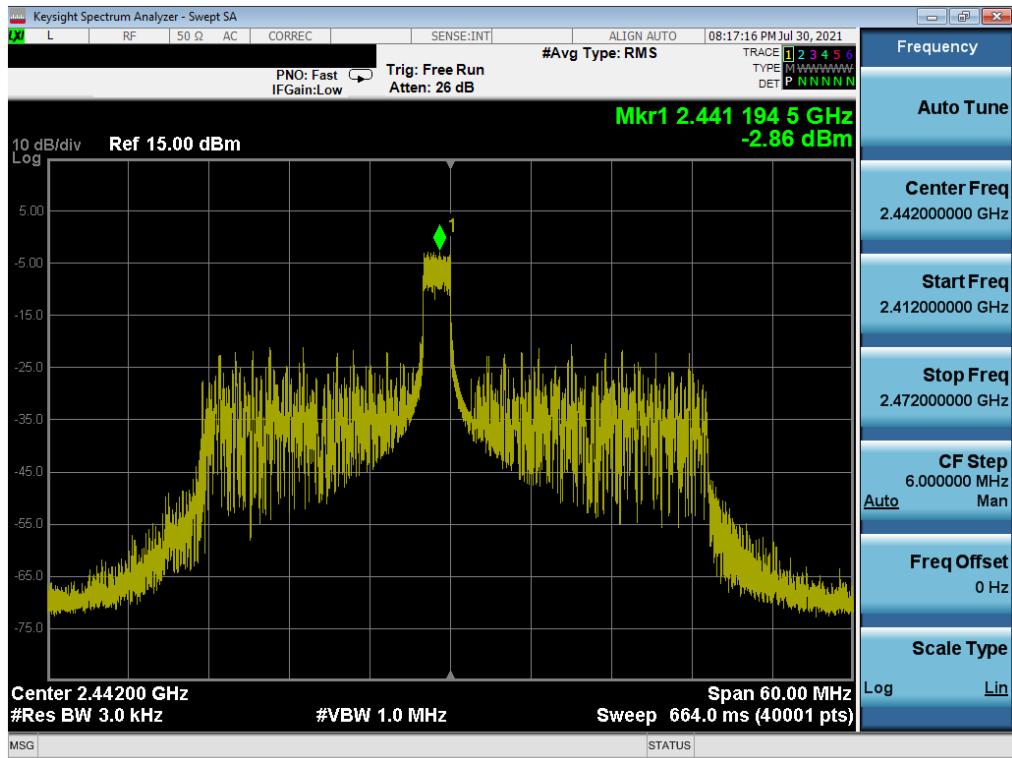

FCC ID: C3K1995 IC: 3048A-1995	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 57 of 202

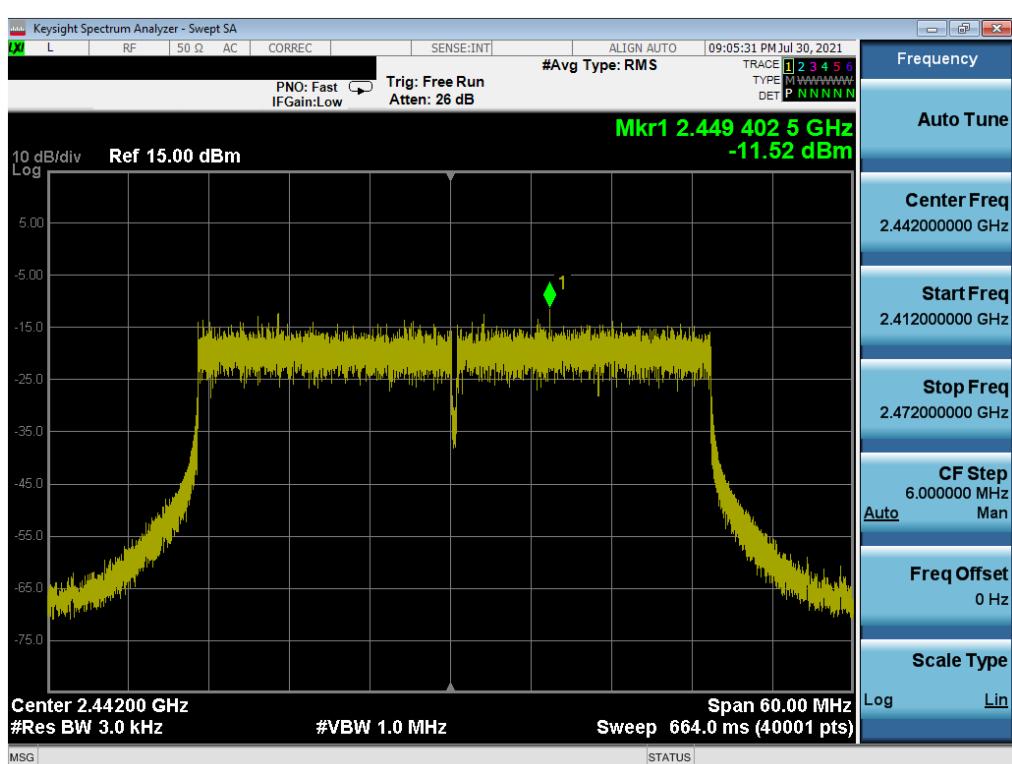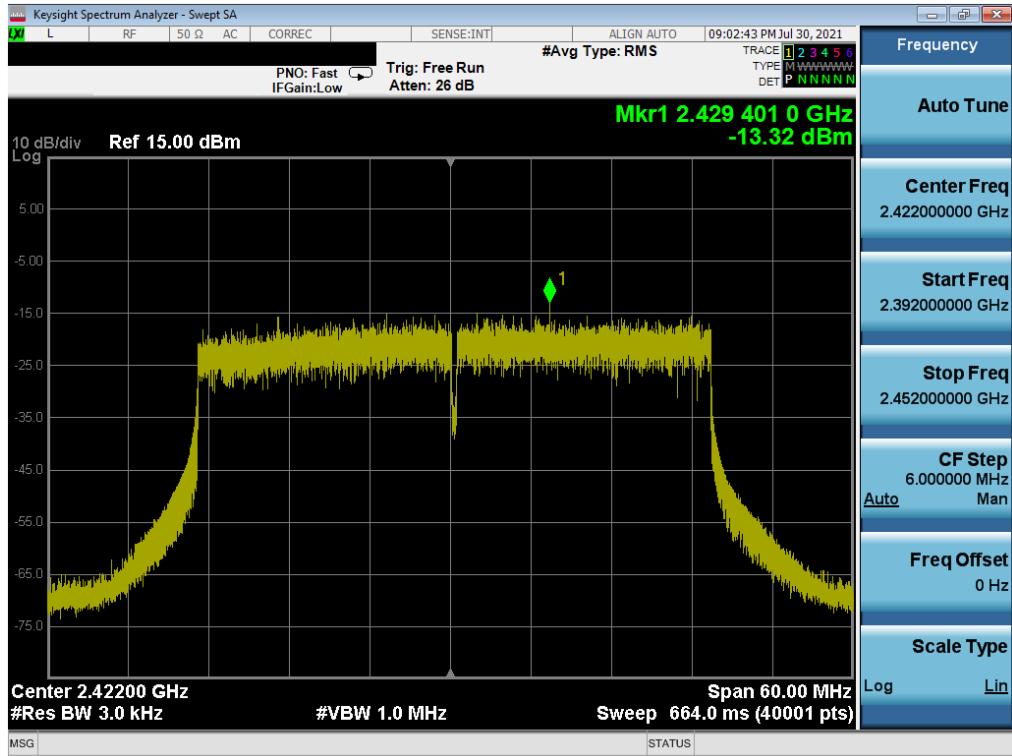

FCC ID: C3K1995 IC: 3048A-1995	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset	Page 58 of 202

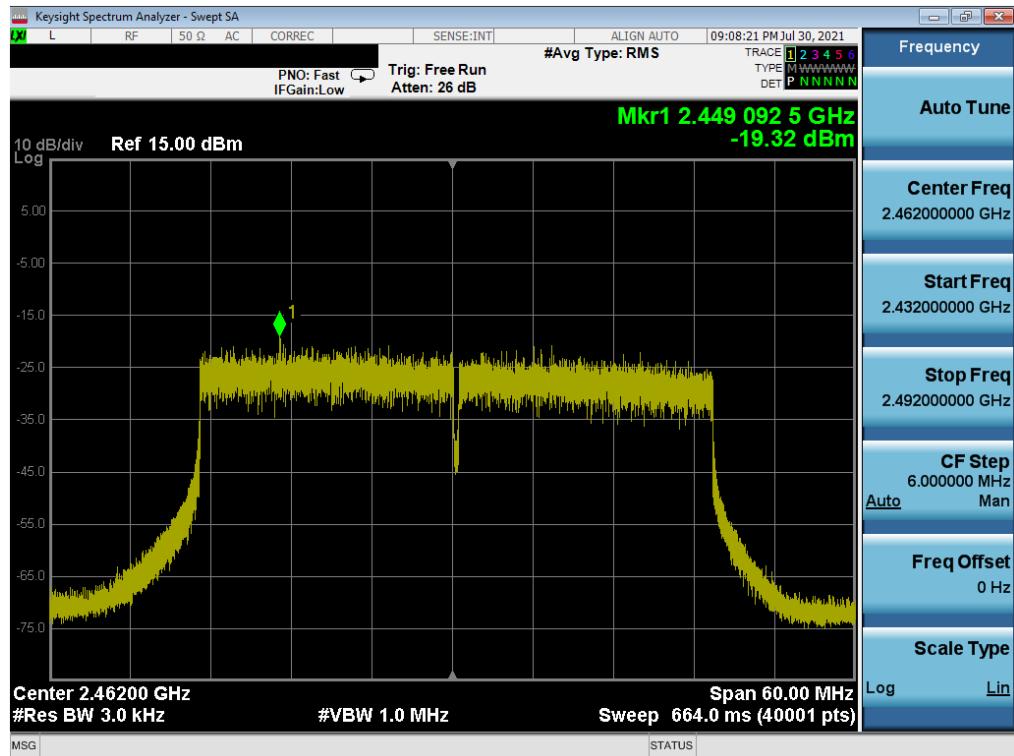


Plot 7-36. Power Spectral Density Plot SISO SOUTH (802.11ax 40MHz BW OFDMA – 484 Tones – Ch. 11)

FCC ID: C3K1995 IC: 3048A-1995	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 59 of 202

SISO NORTH Power Spectral Density Measurements



Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2412	1	ax	26T	MCS0	-2.26	8.00	-10.26	Pass
2437	6	ax	26T	MCS0	-2.16	8.00	-10.16	Pass
2462	11	ax	26T	MCS0	-2.45	8.00	-10.45	Pass
2412	1	ax	242T	MCS0	-8.91	8.00	-16.91	Pass
2437	6	ax	242T	MCS0	-7.47	8.00	-15.47	Pass
2462	11	ax	242T	MCS0	-7.43	8.00	-15.43	Pass

Table 7-35. Conducted Power Density Measurements SISO NORTH 20MHz BW

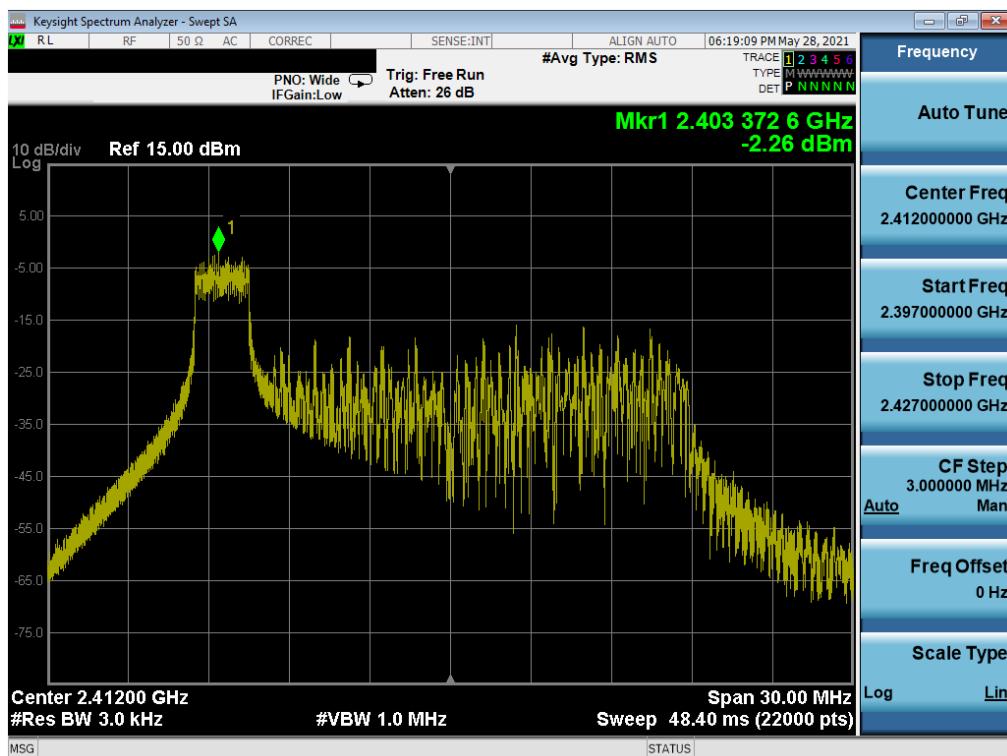


Plot 7-37. Power Spectral Density Plot SISO NORTH (802.11ax 20MHz BW OFDMA – 26 Tones – Ch. 1)


FCC ID: C3K1995 IC: 3048A-1995	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Microsoft	Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 60 of 202

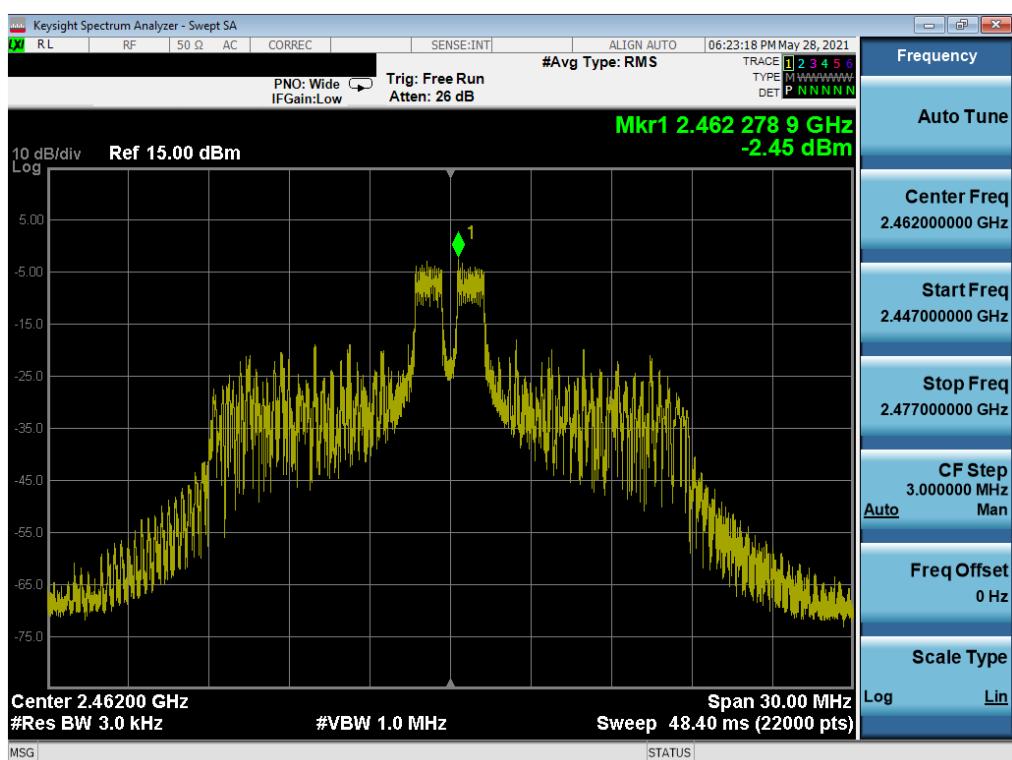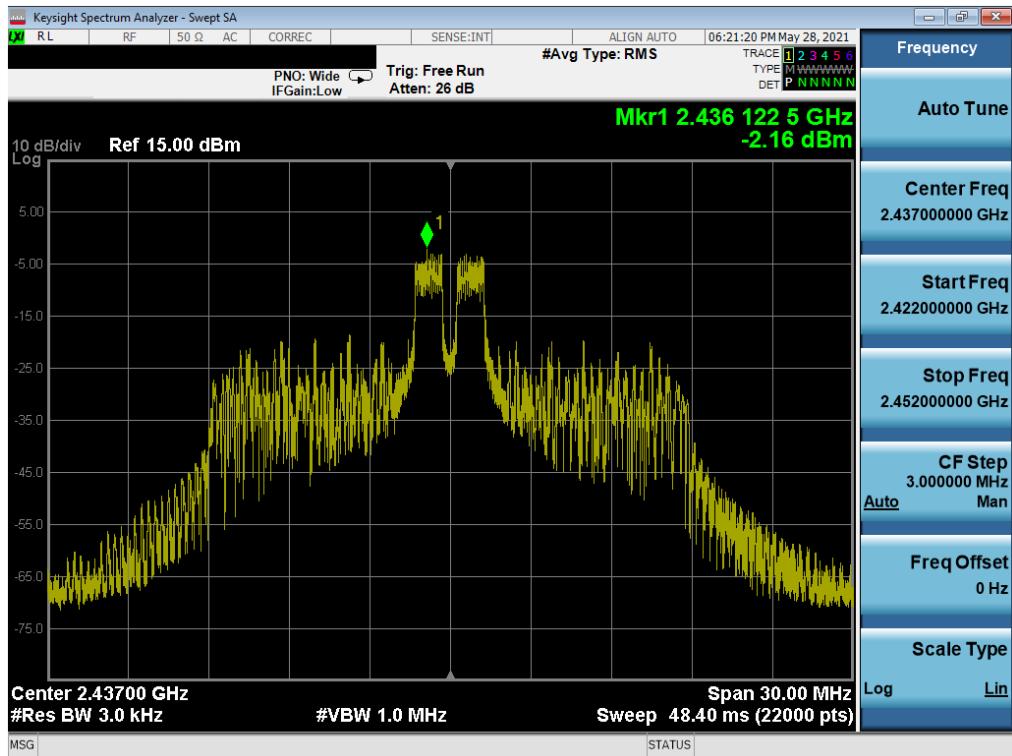

FCC ID: C3K1995 IC: 3048A-1995	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset	Page 61 of 202

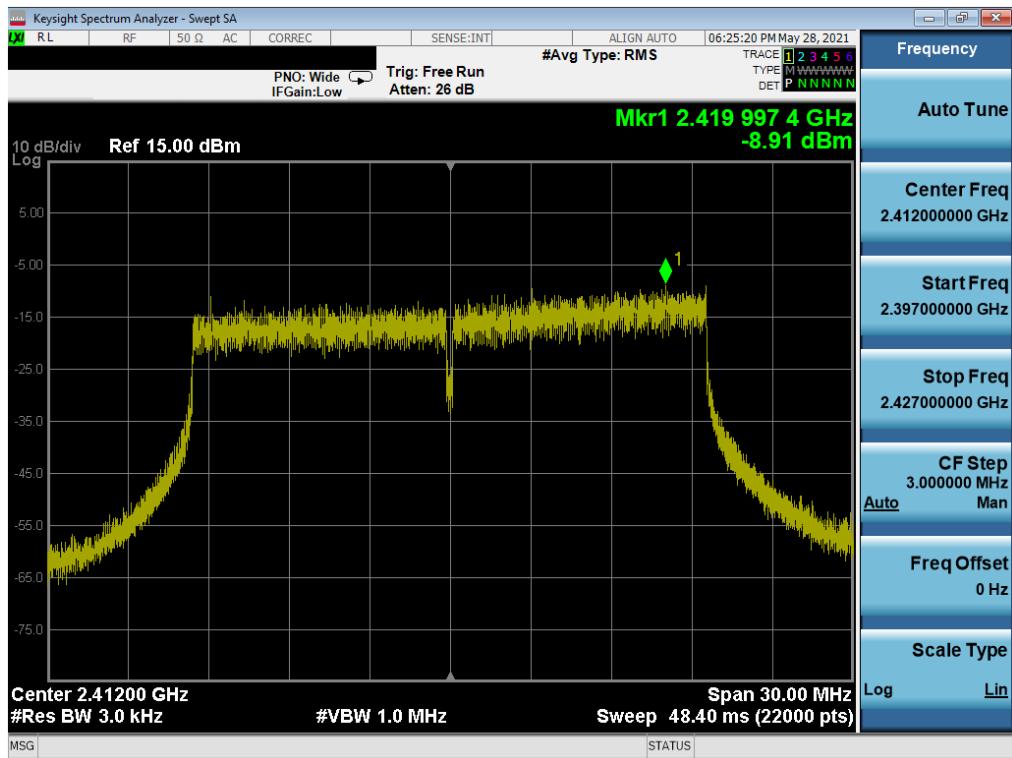


Plot 7-40. Power Spectral Density Plot SISO NORTH (802.11ax 20MHz BW OFDMA – 242 Tones – Ch. 1)

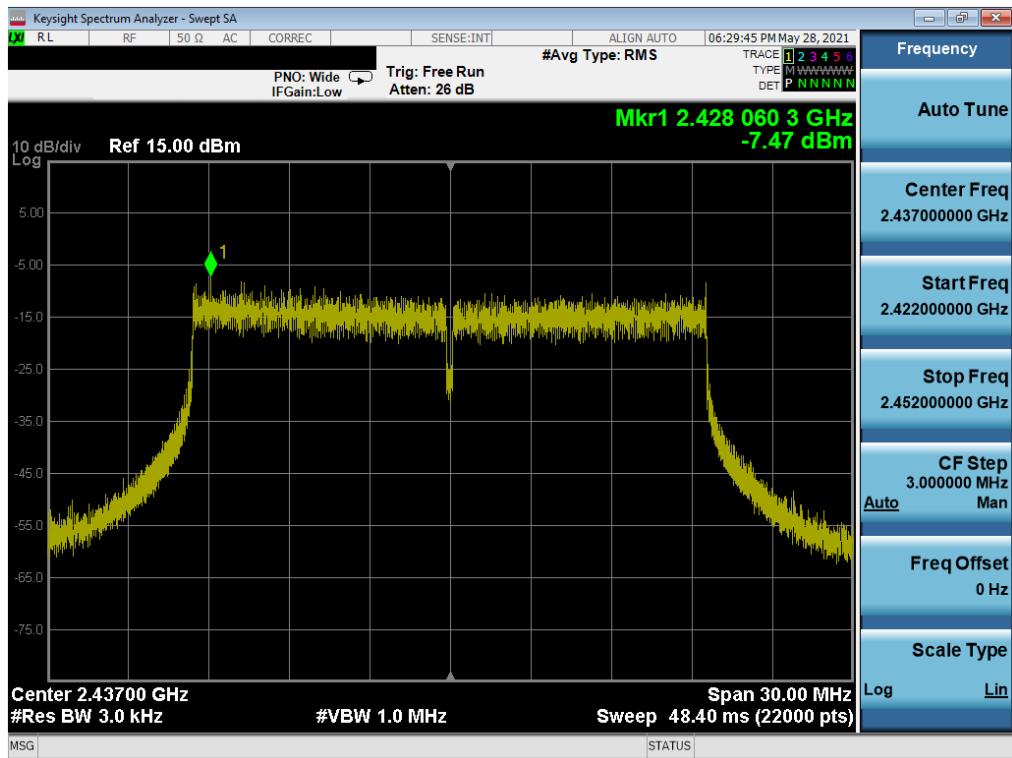

Plot 7-41. Power Spectral Density Plot SISO NORTH (802.11ax 20MHz BW OFDMA – 242 Tones – Ch. 6)

FCC ID: C3K1995 IC: 3048A-1995	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset	Page 62 of 202

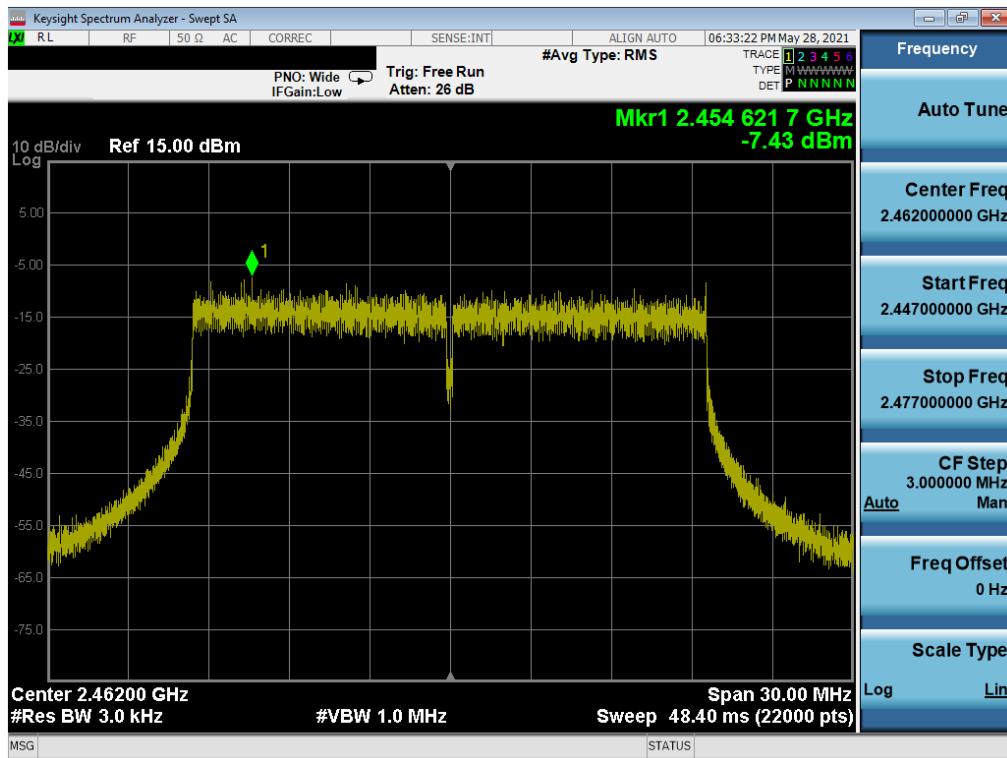


Plot 7-42. Power Spectral Density Plot SISO NORTH (802.11ax 20MHz BW OFDMA – 242 Tones – Ch. 11)

FCC ID: C3K1995 IC: 3048A-1995	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset	Page 63 of 202


Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2422	3	ax	26T	MCS0	-0.59	8.00	-8.59	Pass
2442	7	ax	26T	MCS0	-1.22	8.00	-9.22	Pass
2462	11	ax	26T	MCS0	-12.67	8.00	-20.67	Pass
2422	3	ax	484T	MCS0	-13.722	8.00	-21.72	Pass
2442	7	ax	484T	MCS0	-11.84	8.00	-19.84	Pass
2462	11	ax	484T	MCS0	-18.56	8.00	-26.56	Pass

Table 7-36. Conducted Power Density Measurements SISO NORTH 40MHz BW

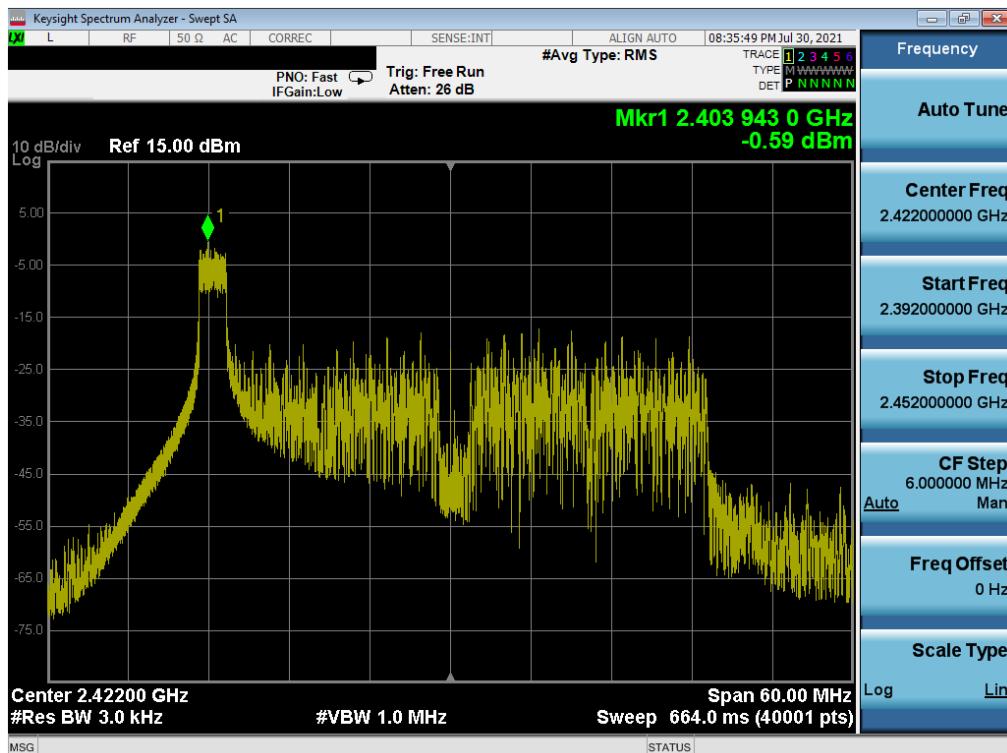


Plot 7-43. Power Spectral Density Plot SISO NORTH (802.11ax 40MHz BW OFDMA – 26 Tones – Ch. 3)

FCC ID: C3K1995 IC: 3048A-1995	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 64 of 202


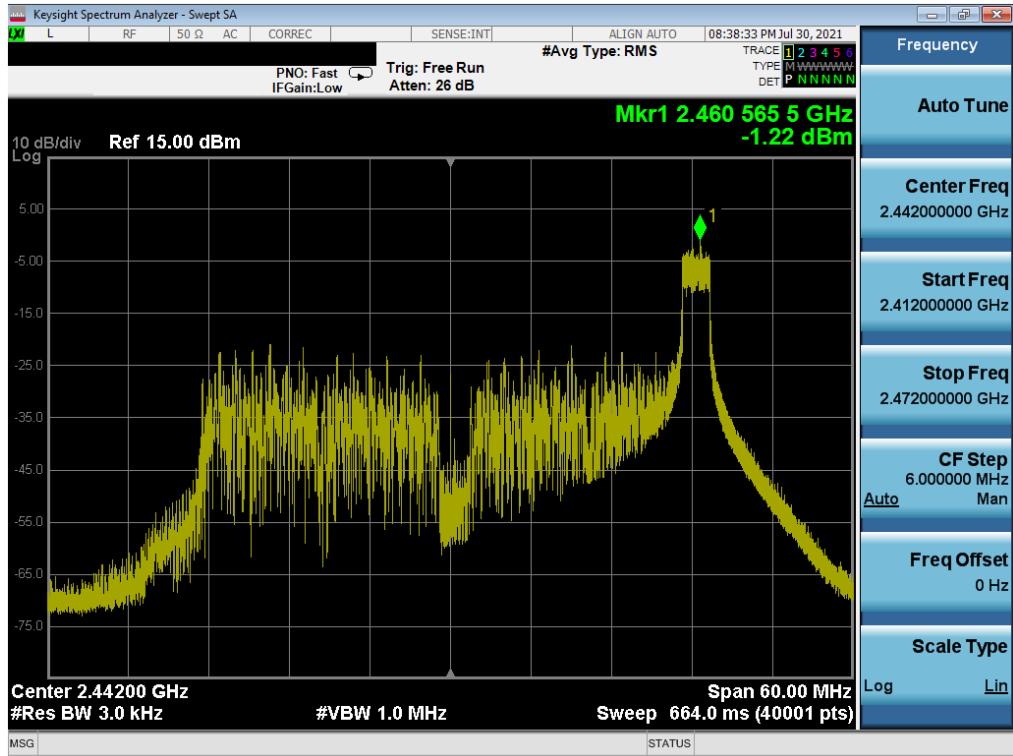


Plot 7-44. Power Spectral Density Plot SISO NORTH (802.11ax 40MHz BW OFDMA – 26 Tones – Ch. 7)

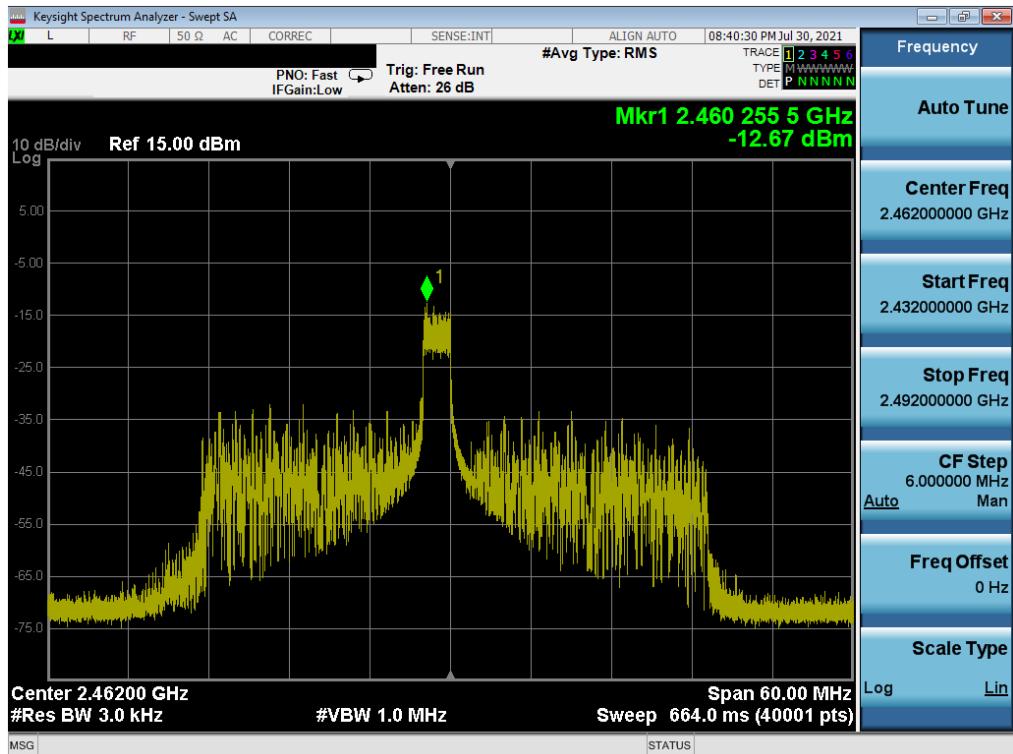


Plot 7-45. Power Spectral Density Plot SISO NORTH (802.11ax 40MHz BW OFDMA – 26 Tones – Ch. 11)

FCC ID: C3K1995 IC: 3048A-1995	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset	Page 65 of 202

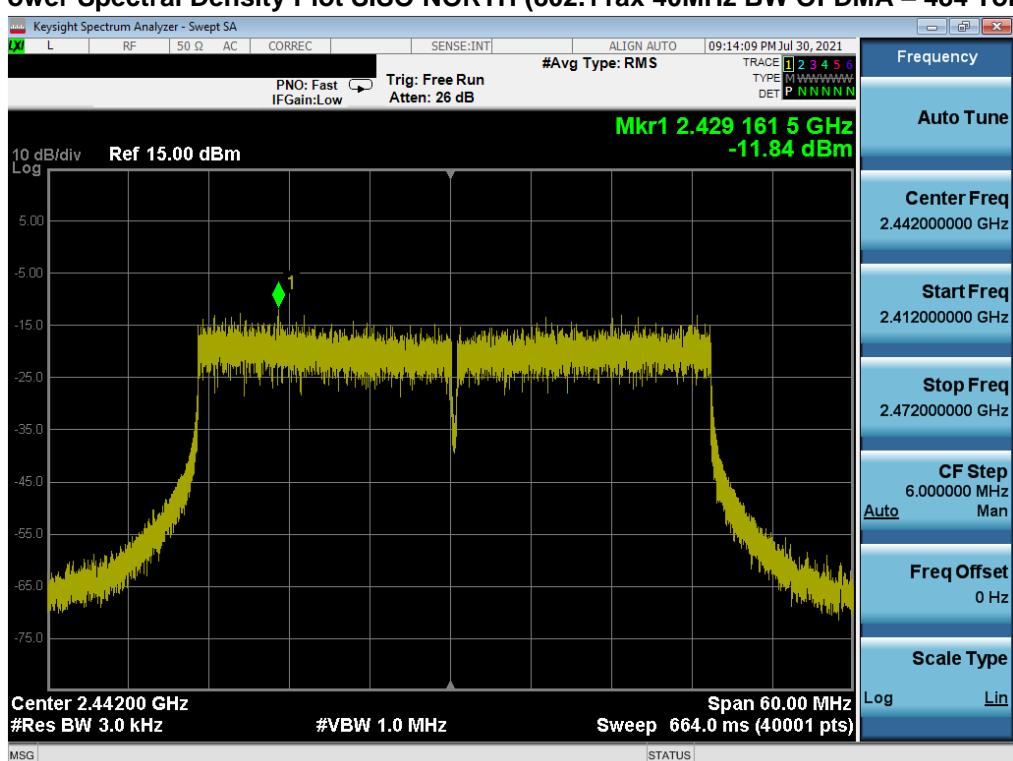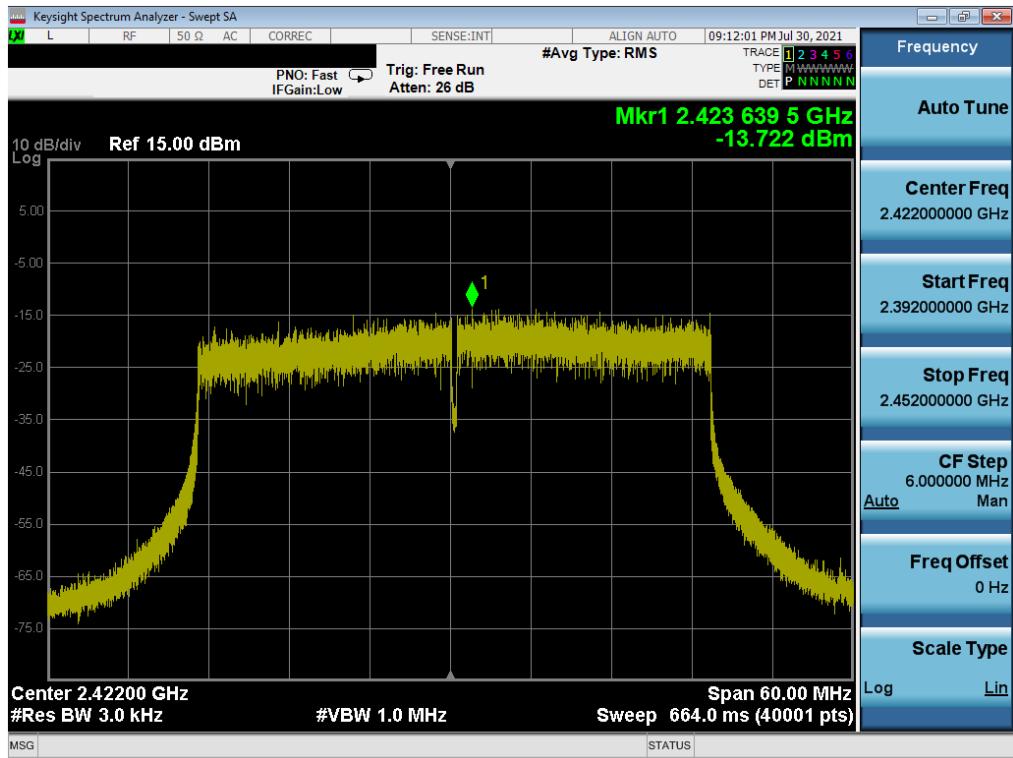

FCC ID: C3K1995 IC: 3048A-1995	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset	Page 66 of 202

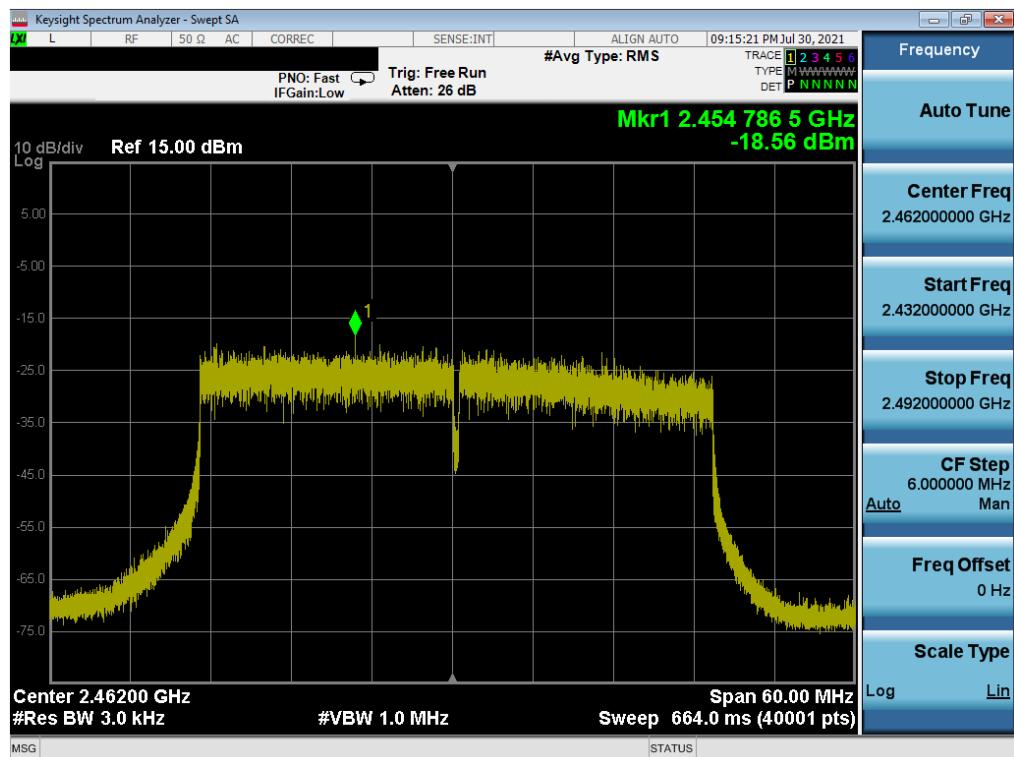


Plot 7-48. Power Spectral Density Plot SISO NORTH (802.11ax 40MHz BW OFDMA – 484 Tones – Ch. 11)

FCC ID: C3K1995 IC: 3048A-1995	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 67 of 202

MIMO Power Spectral Density Measurements


Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	SOUTH Power Spectral Density [dBm]	NORTH Power Spectral Density [dBm]	Summed MIMO Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2412	1	ax	26T	MCS0	-2.30	-2.25	0.74	8.00	-7.26	Pass
2437	6	ax	26T	MCS0	-1.65	-2.86	0.80	8.00	-7.20	Pass
2462	11	ax	26T	MCS0	-0.49	-1.42	2.08	8.00	-5.92	Pass
2412	1	ax	242T	MCS0	-6.96	-7.56	-4.24	8.00	-12.24	Pass
2437	6	ax	242T	MCS0	-7.65	-8.34	-4.97	8.00	-12.97	Pass
2462	11	ax	242T	MCS0	-8.51	-9.13	-5.80	8.00	-13.80	Pass

Table 7-37. MIMO Conducted Power Density Measurements 20MHz BW

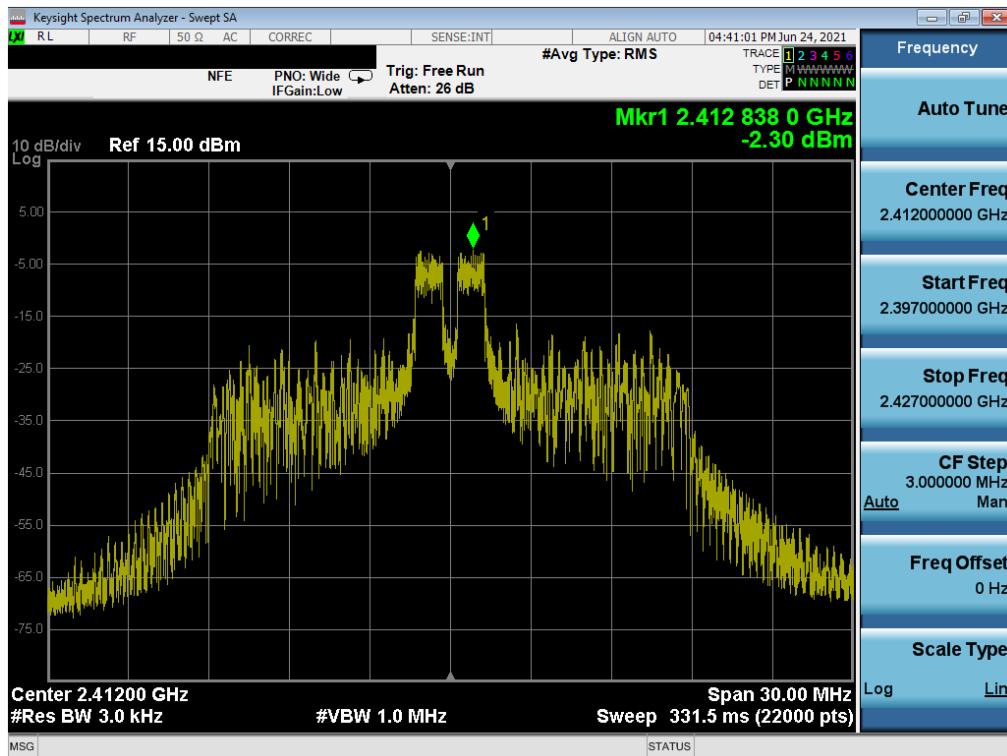


Plot 7-49. Power Spectral Density Plot MIMO SOUTH (802.11ax 20MHz BW OFDMA – 26 Tones – Ch. 1)

FCC ID: C3K1995 IC: 3048A-1995	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 68 of 202

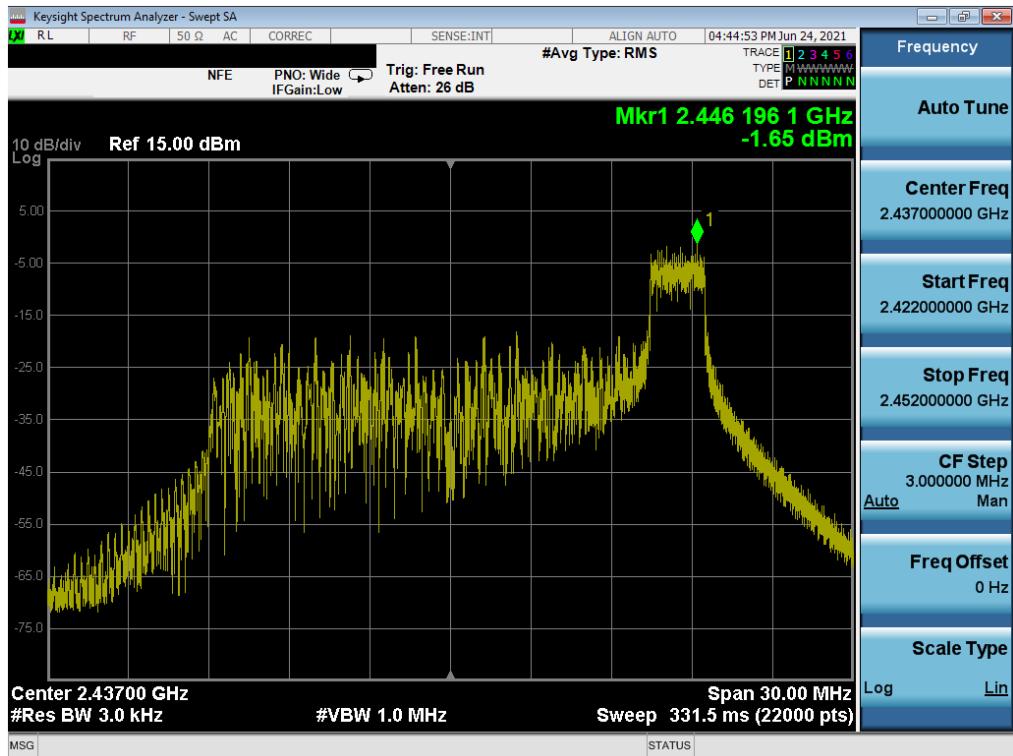


Plot 7-50. Power Spectral Density Plot MIMO SOUTH (802.11ax 20MHz BW OFDMA – 26 Tones – Ch. 6)

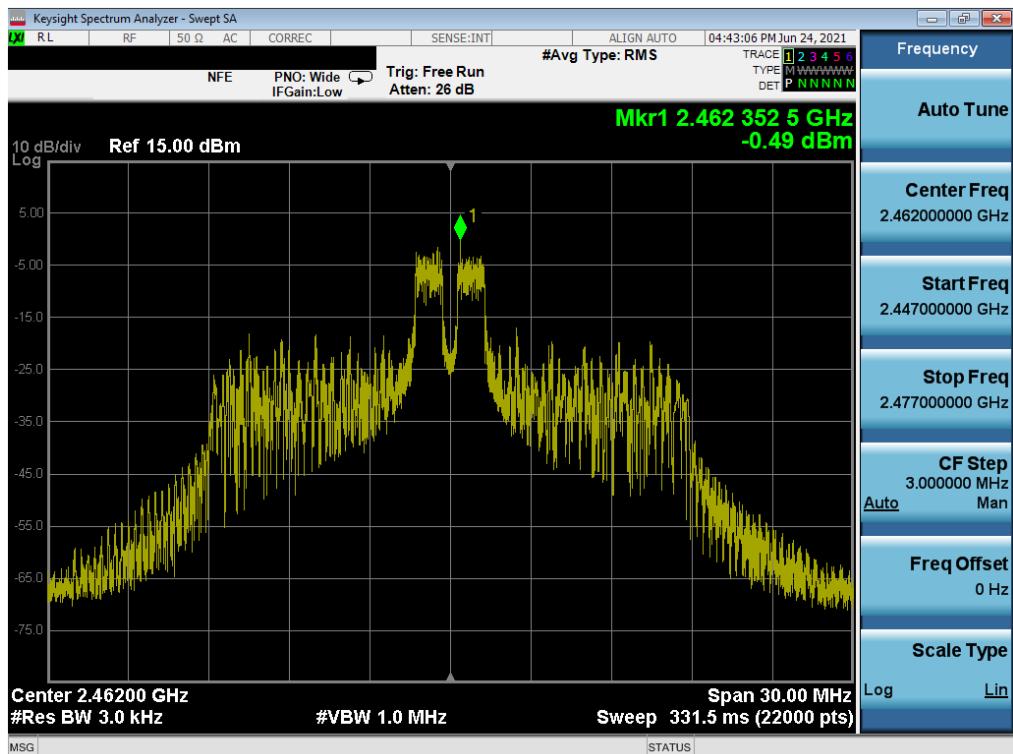


Plot 7-51. Power Spectral Density Plot MIMO SOUTH (802.11ax 20MHz BW OFDMA – 26 Tones – Ch. 11)

FCC ID: C3K1995 IC: 3048A-1995	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset	Page 69 of 202

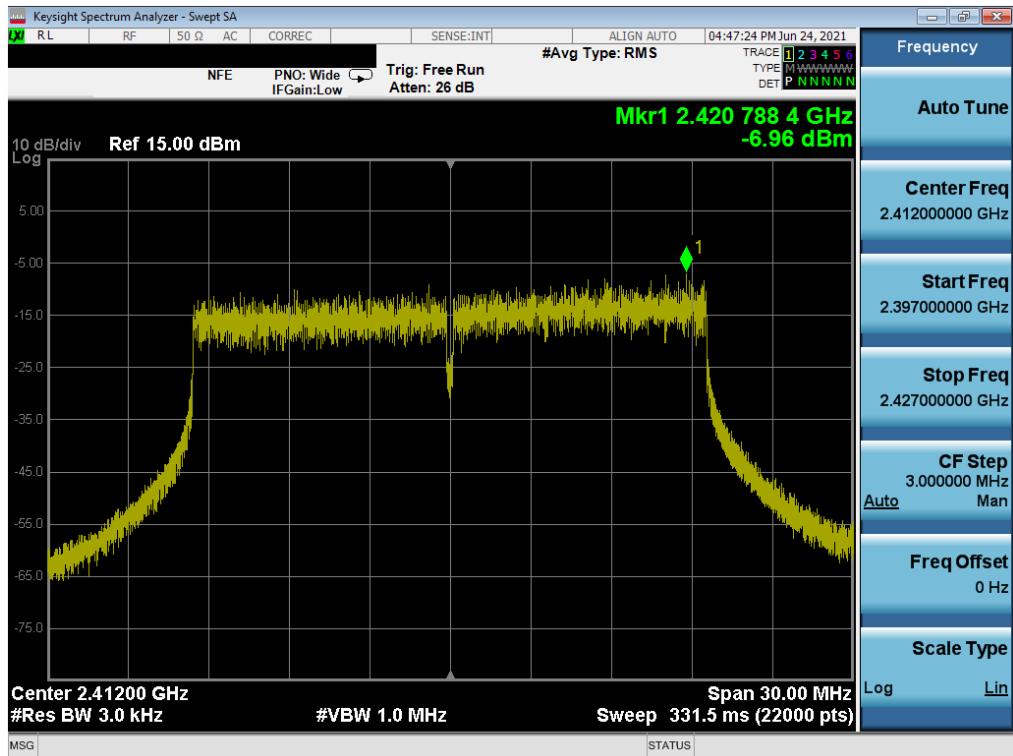


Plot 7-52. Power Spectral Density Plot MIMO SOUTH (802.11ax 20MHz BW OFDMA – 242 Tones – Ch. 1)

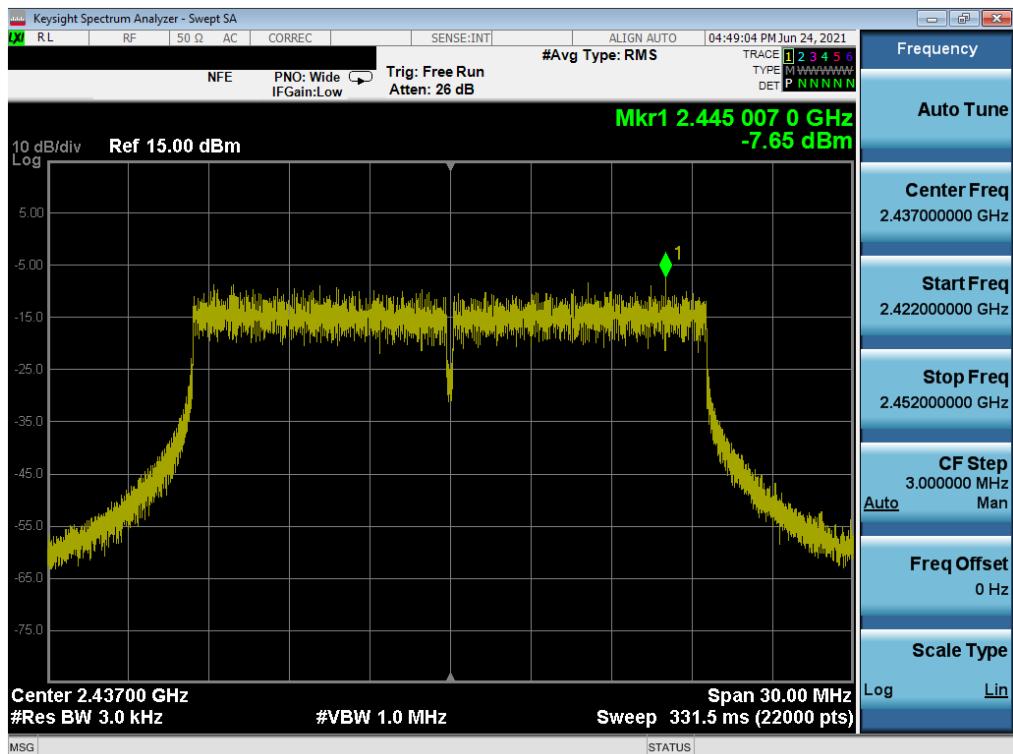


Plot 7-53. Power Spectral Density Plot MIMO SOUTH (802.11ax 20MHz BW OFDMA – 242 Tones – Ch. 6)

FCC ID: C3K1995 IC: 3048A-1995	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset	Page 70 of 202

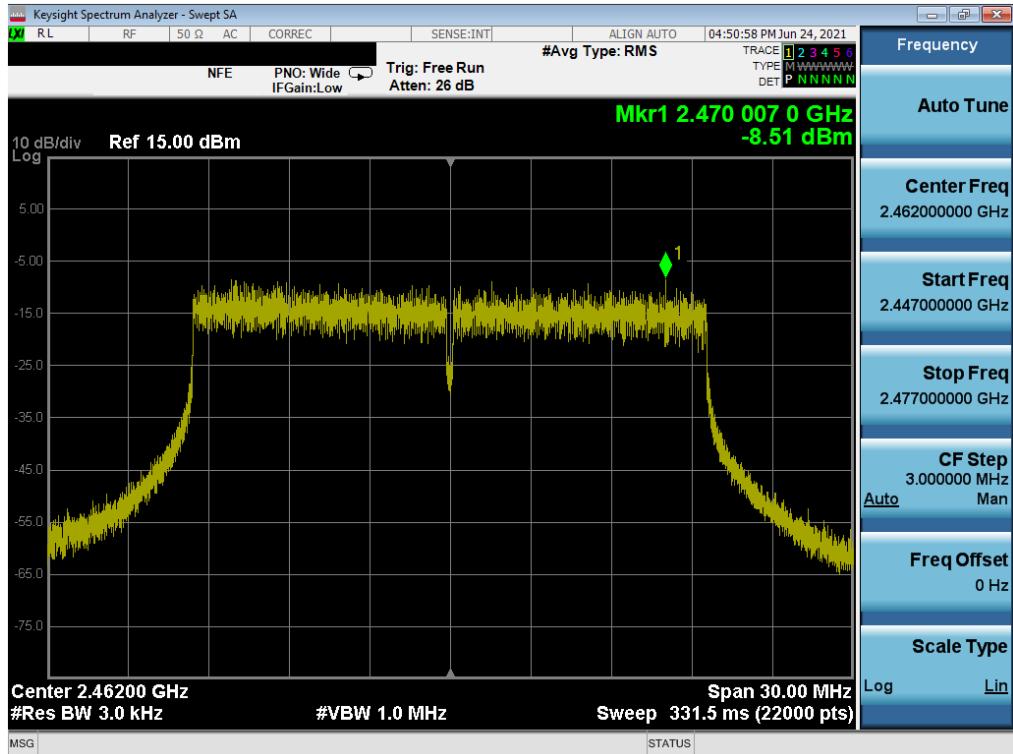


Plot 7-54. Power Spectral Density Plot MIMO SOUTH (802.11ax 20MHz BW OFDMA – 242 Tones – Ch. 11)

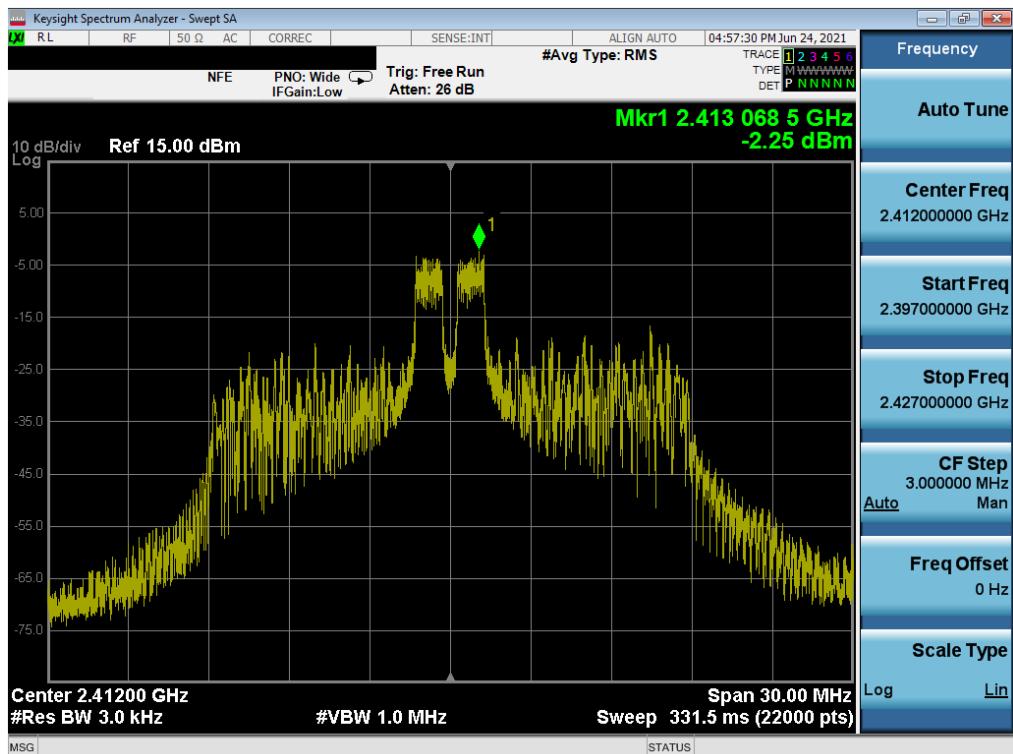


Plot 7-55. Power Spectral Density Plot MIMO NORTH (802.11ax 20MHz BW OFDMA – 26 Tones – Ch. 1)

FCC ID: C3K1995 IC: 3048A-1995	 PCTEST® <small>Proud to be part of element</small>	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 71 of 202

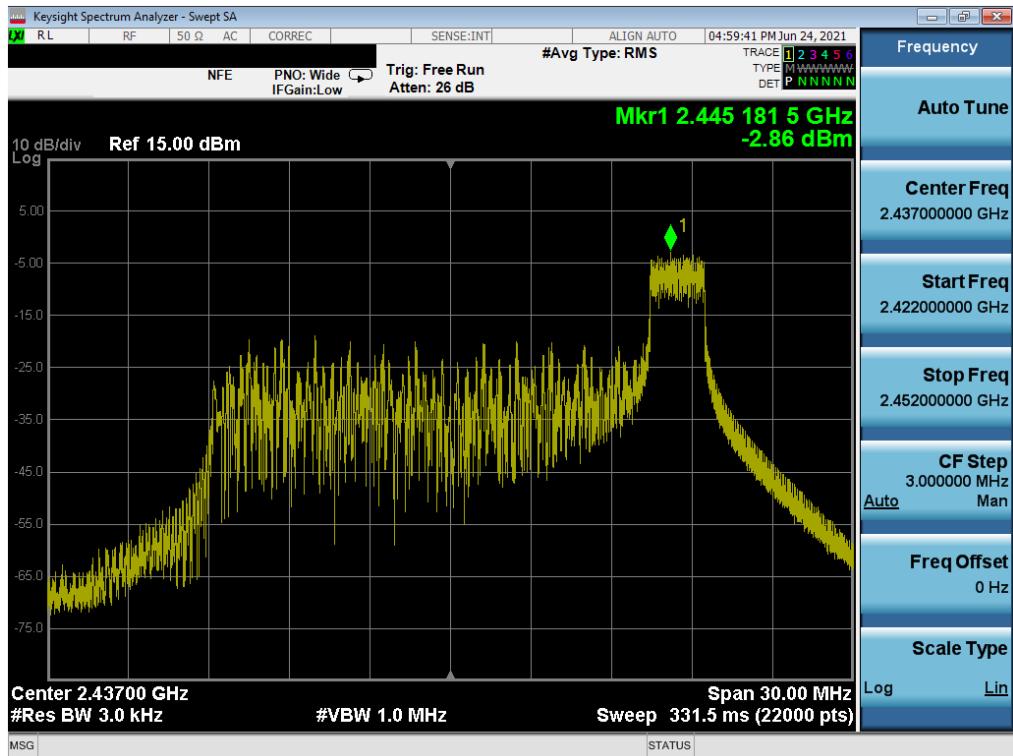


Plot 7-56. Power Spectral Density Plot MIMO NORTH (802.11ax 20MHz BW OFDMA – 26 Tones – Ch. 6)

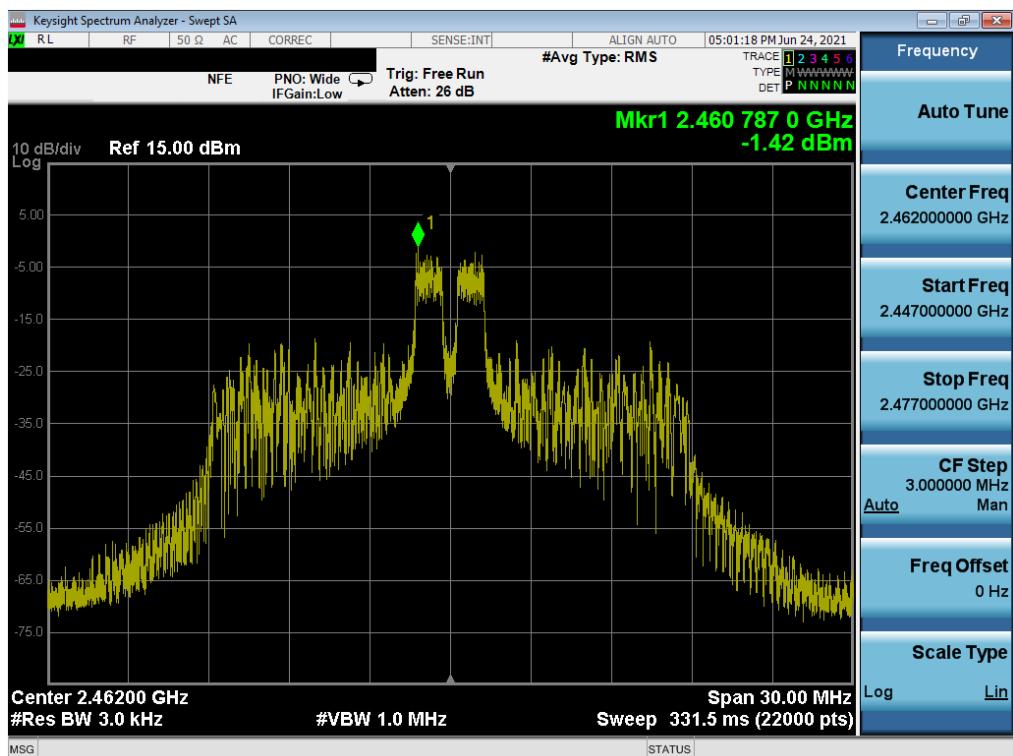


Plot 7-57. Power Spectral Density Plot MIMO NORTH (802.11ax 20MHz BW OFDMA – 26 Tones – Ch. 11)

FCC ID: C3K1995 IC: 3048A-1995	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset	Page 72 of 202

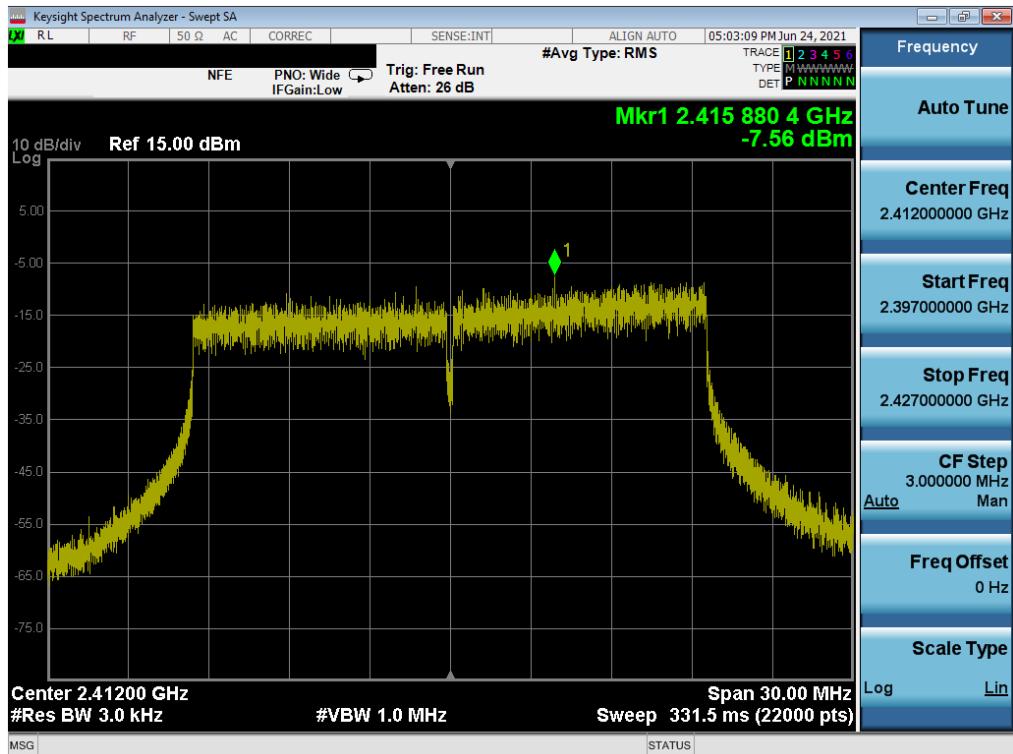


Plot 7-58. Power Spectral Density Plot MIMO NORTH (802.11ax 20MHz BW OFDMA – 484 Tones – Ch. 1)

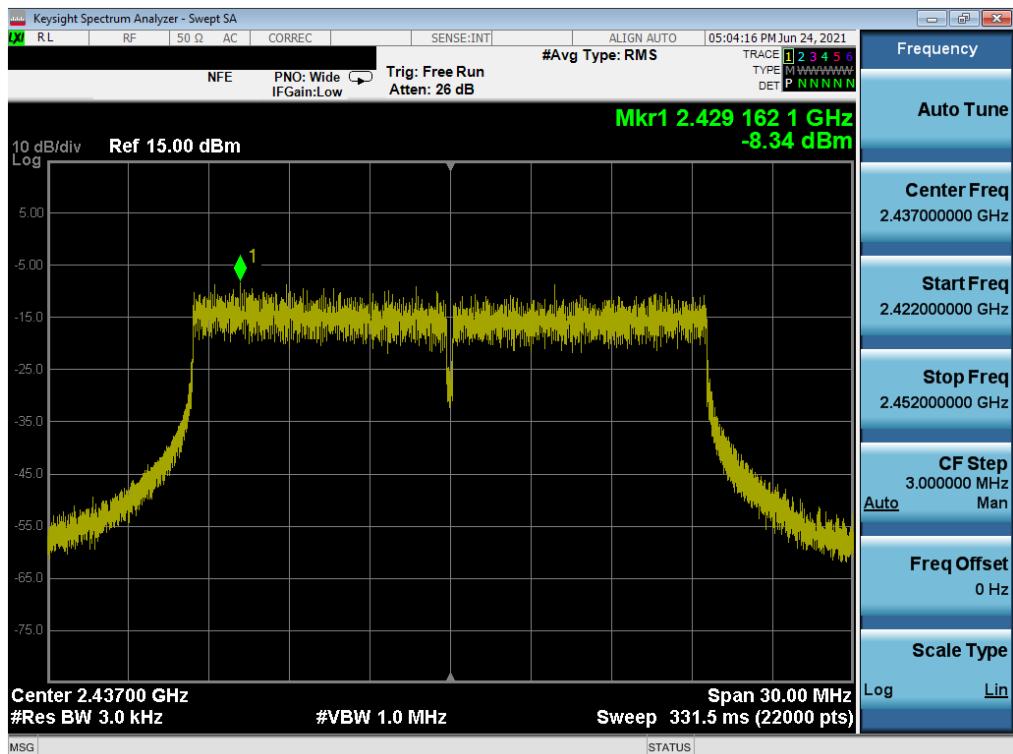

Plot 7-59. Power Spectral Density Plot MIMO NORTH (802.11ax 20MHz BW OFDMA – 484 Tones – Ch. 6)

FCC ID: C3K1995 IC: 3048A-1995	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Microsoft	Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 73 of 202

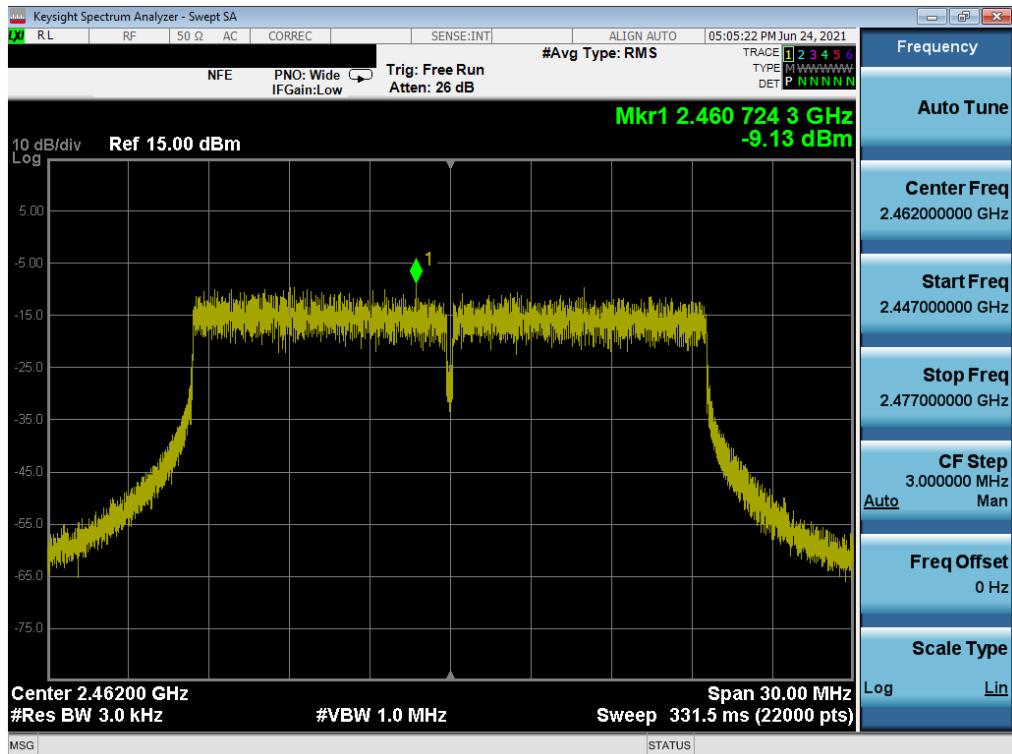


Plot 7-60. Power Spectral Density Plot MIMO NORTH (802.11ax 20MHz BW OFDMA – 484 Tones – Ch. 11)

FCC ID: C3K1995 IC: 3048A-1995	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset	Page 74 of 202


Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	SOUTH Power Spectral Density [dBm]	NORTH Power Spectral Density [dBm]	Summed MIMO Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2422	3	ax	26T	MCS0	-2.24	-3.19	0.32	8.00	-7.68	Pass
2442	7	ax	26T	MCS0	-2.807	-1.65	0.82	8.00	-7.18	Pass
2462	11	ax	26T	MCS0	-15.30	-12.74	-10.82	8.00	-18.82	Pass
2422	3	ax	484T	MCS0	-11.14	-11.68	-8.39	8.00	-16.39	Pass
2442	7	ax	484T	MCS0	-11.51	-11.56	-8.52	8.00	-16.52	Pass
2462	11	ax	484T	MCS0	-15.31	-15.71	-12.50	8.00	-20.50	Pass

Table 7-38. MIMO Conducted Power Density Measurements 40MHz BW

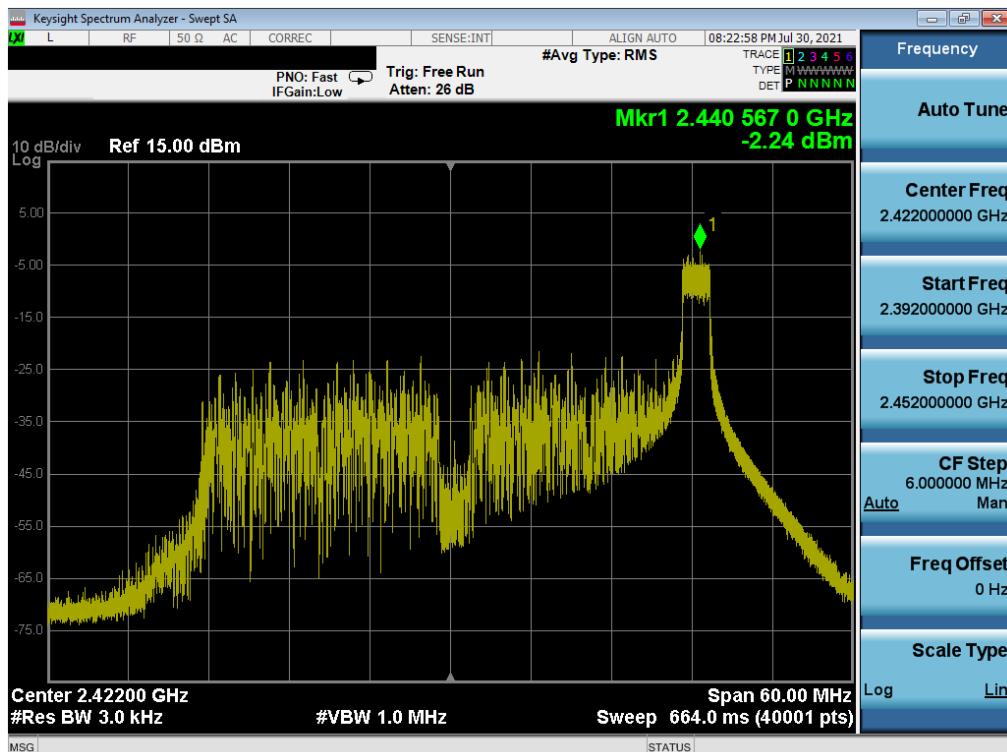


Plot 7-61. Power Spectral Density Plot MIMO SOUTH (802.11ax 40MHz BW OFDMA – 26 Tones – Ch. 3)

FCC ID: C3K1995 IC: 3048A-1995	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 75 of 202

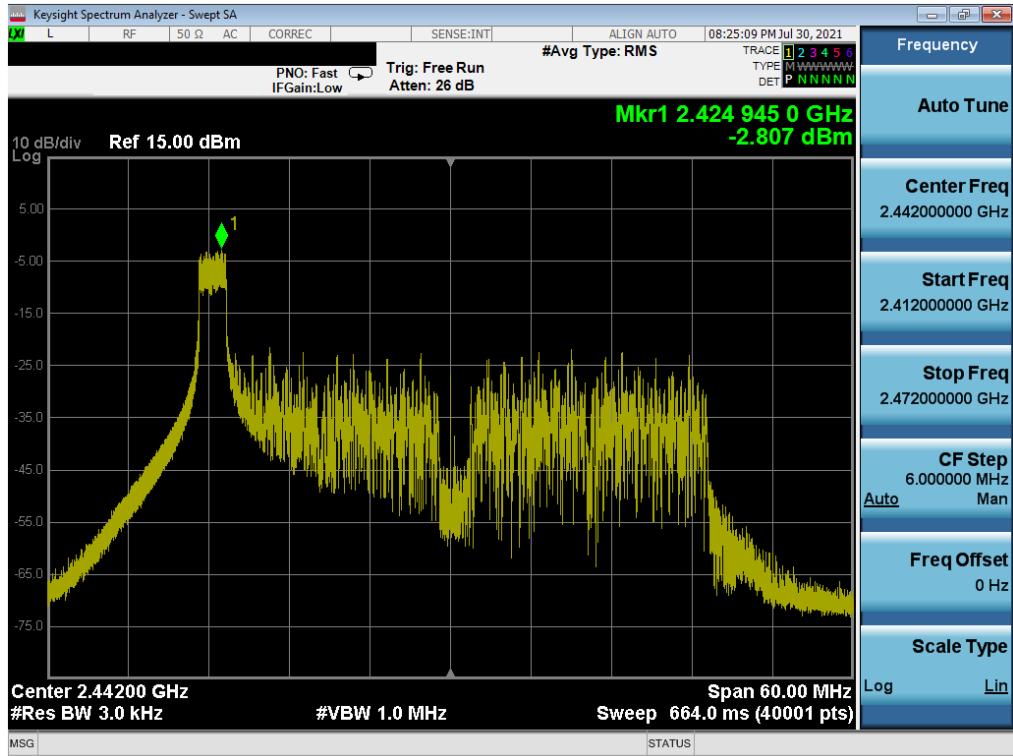


Plot 7-62. Power Spectral Density Plot MIMO SOUTH (802.11ax 40MHz BW OFDMA – 26 Tones – Ch. 7)

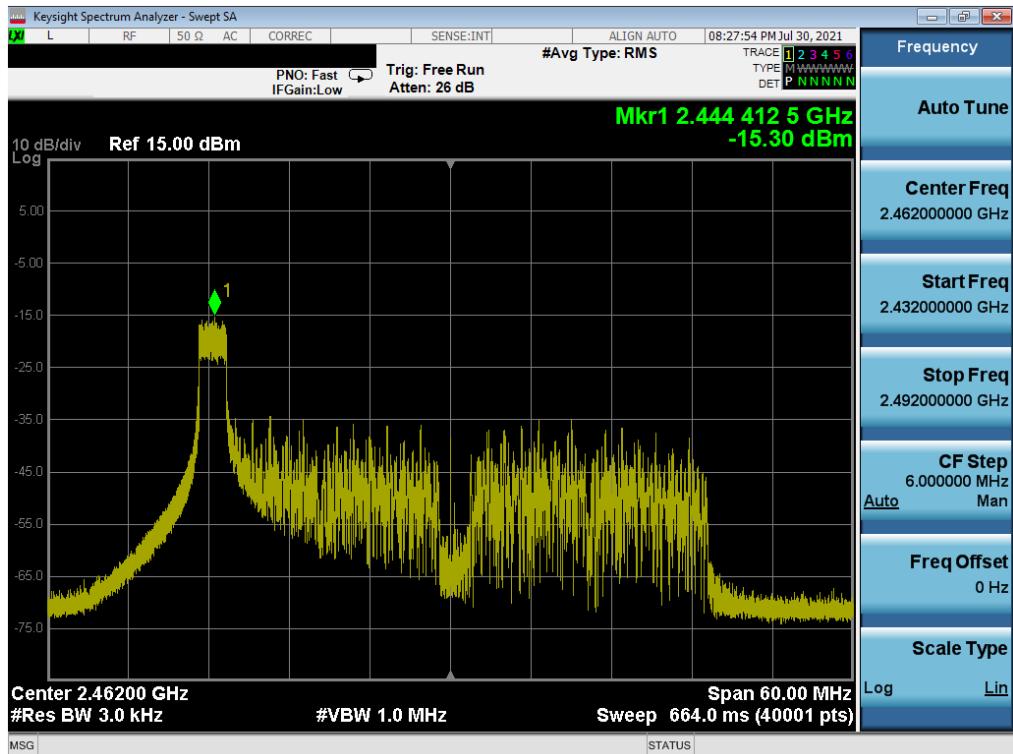


Plot 7-63. Power Spectral Density Plot MIMO SOUTH (802.11ax 40MHz BW OFDMA – 26 Tones – Ch. 11)

FCC ID: C3K1995 IC: 3048A-1995	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset	Page 76 of 202

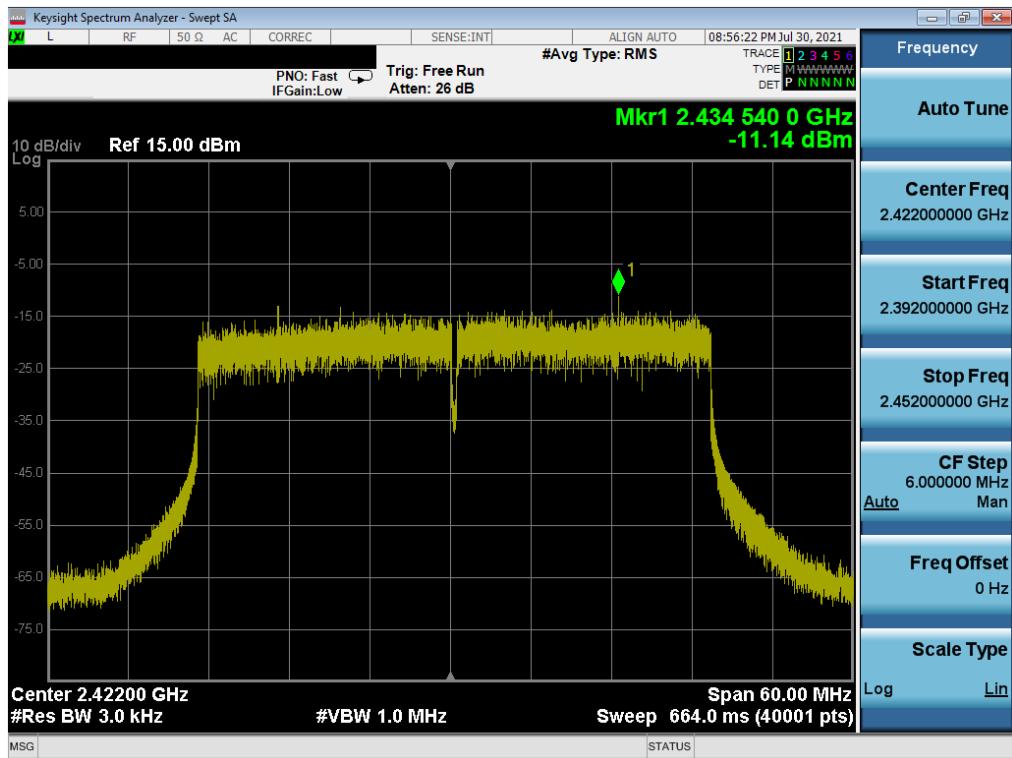


Plot 7-64. Power Spectral Density Plot MIMO SOUTH (802.11ax 40MHz BW OFDMA – 484 Tones – Ch. 3)

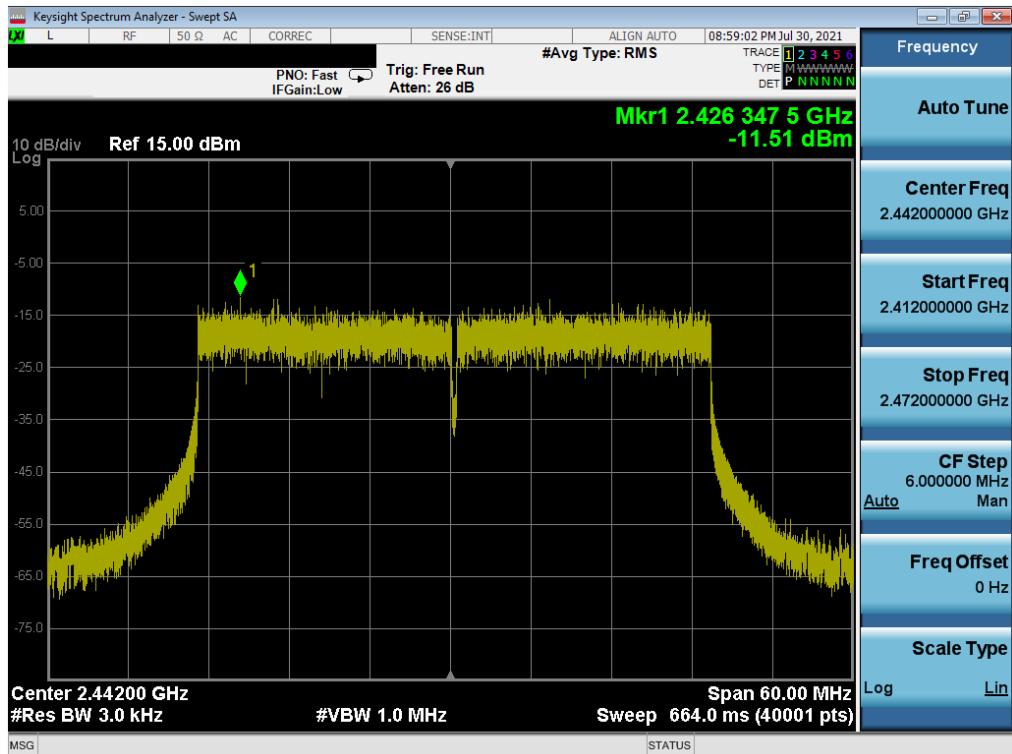


Plot 7-65. Power Spectral Density Plot MIMO SOUTH (802.11ax 40MHz BW OFDMA – 242 Tones – Ch. 7)

FCC ID: C3K1995 IC: 3048A-1995	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset	Page 77 of 202

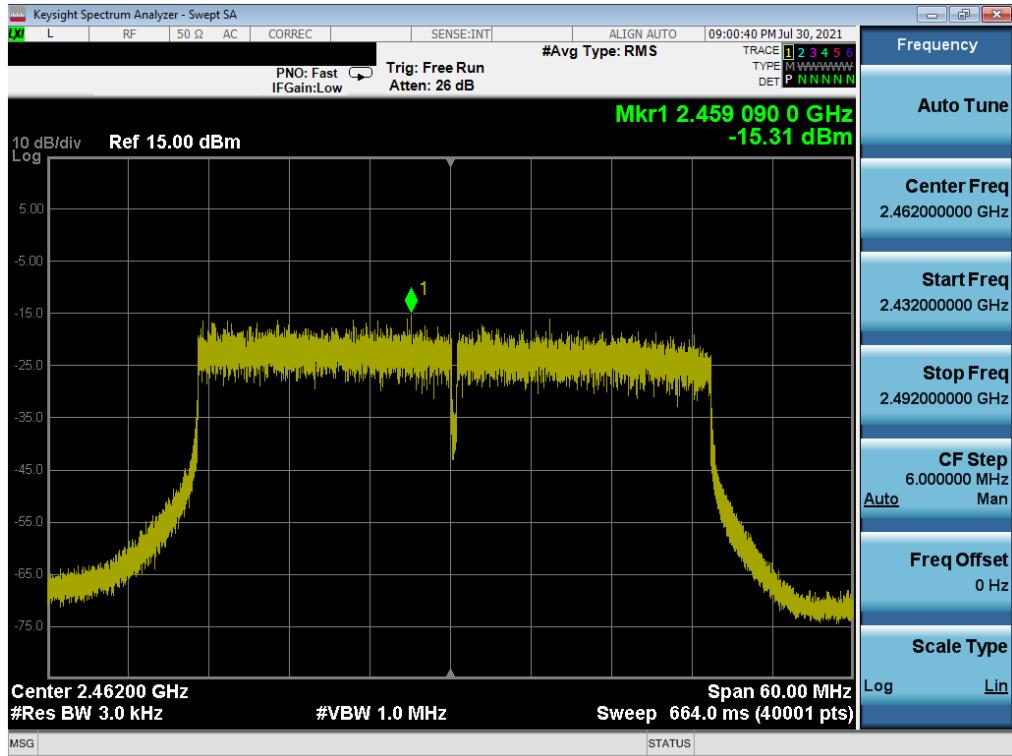


Plot 7-66. Power Spectral Density Plot MIMO SOUTH (802.11ax 40MHz BW OFDMA – 242 Tones – Ch. 11)

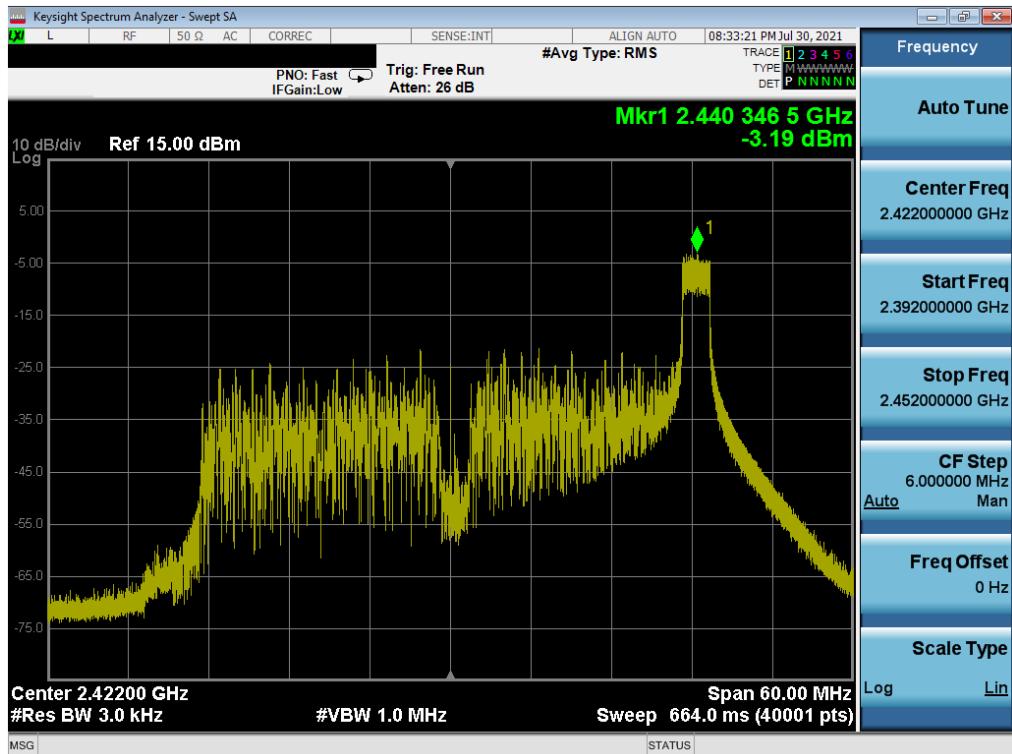


Plot 7-67. Power Spectral Density Plot MIMO NORTH (802.11ax 40MHz BW OFDMA – 26 Tones – Ch. 3)

FCC ID: C3K1995 IC: 3048A-1995	PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset	Page 78 of 202

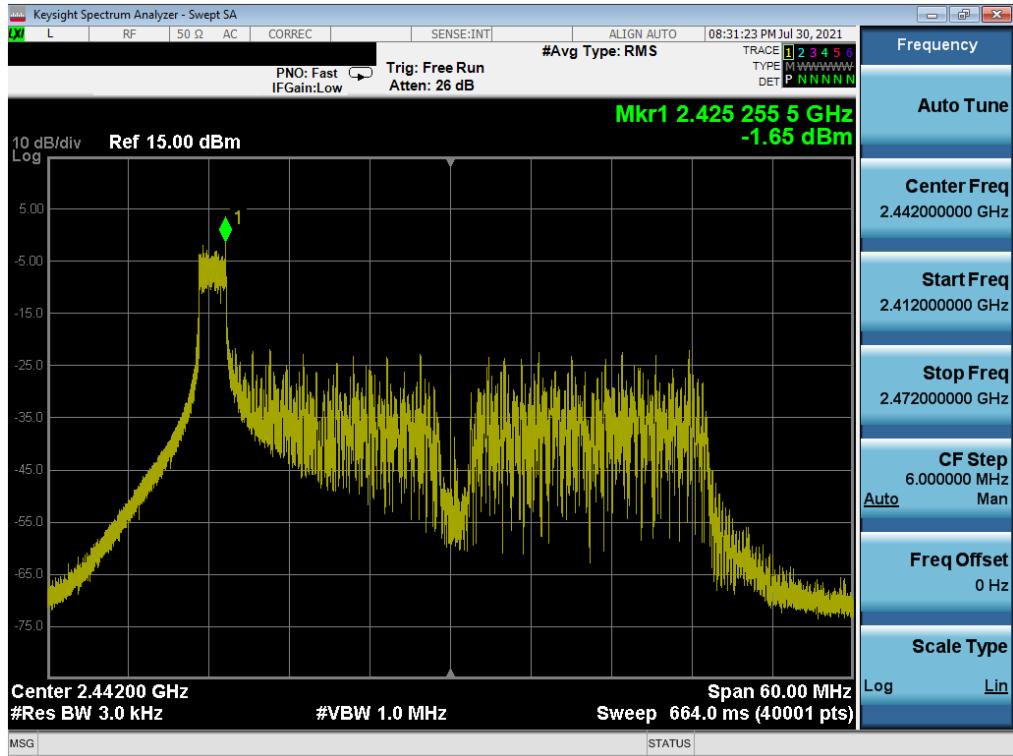


Plot 7-68. Power Spectral Density Plot MIMO NORTH (802.11ax 40MHz BW OFDMA – 26 Tones – Ch. 7)

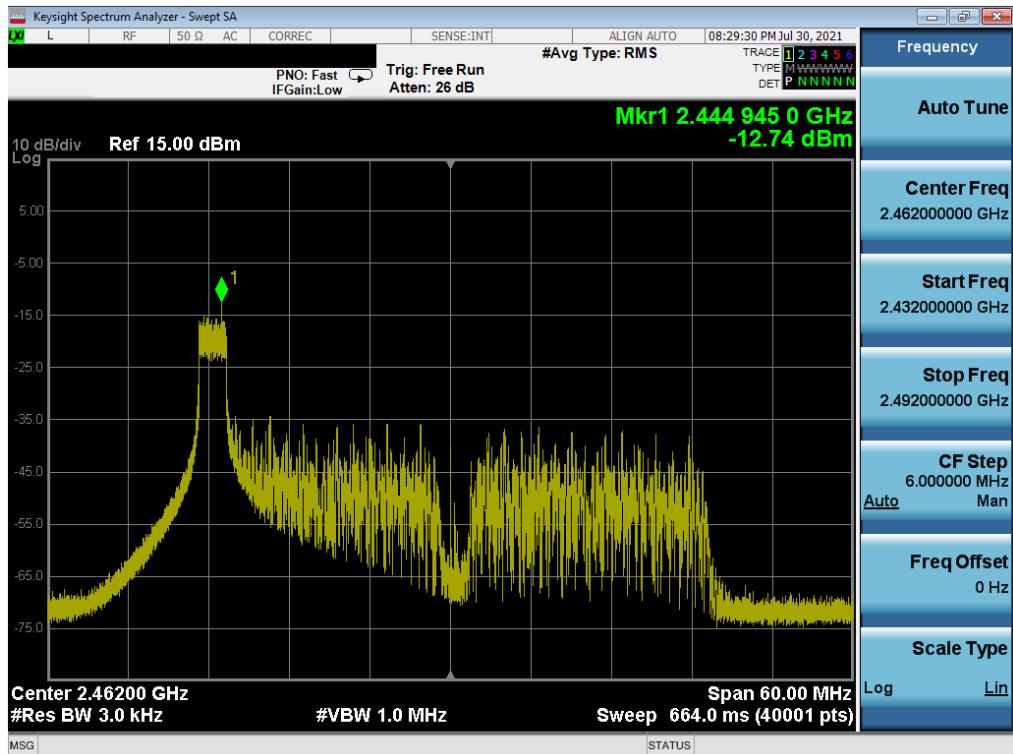


Plot 7-69. Power Spectral Density Plot MIMO NORTH (802.11ax 40MHz BW OFDMA – 26 Tones – Ch. 11)

FCC ID: C3K1995 IC: 3048A-1995	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 79 of 202

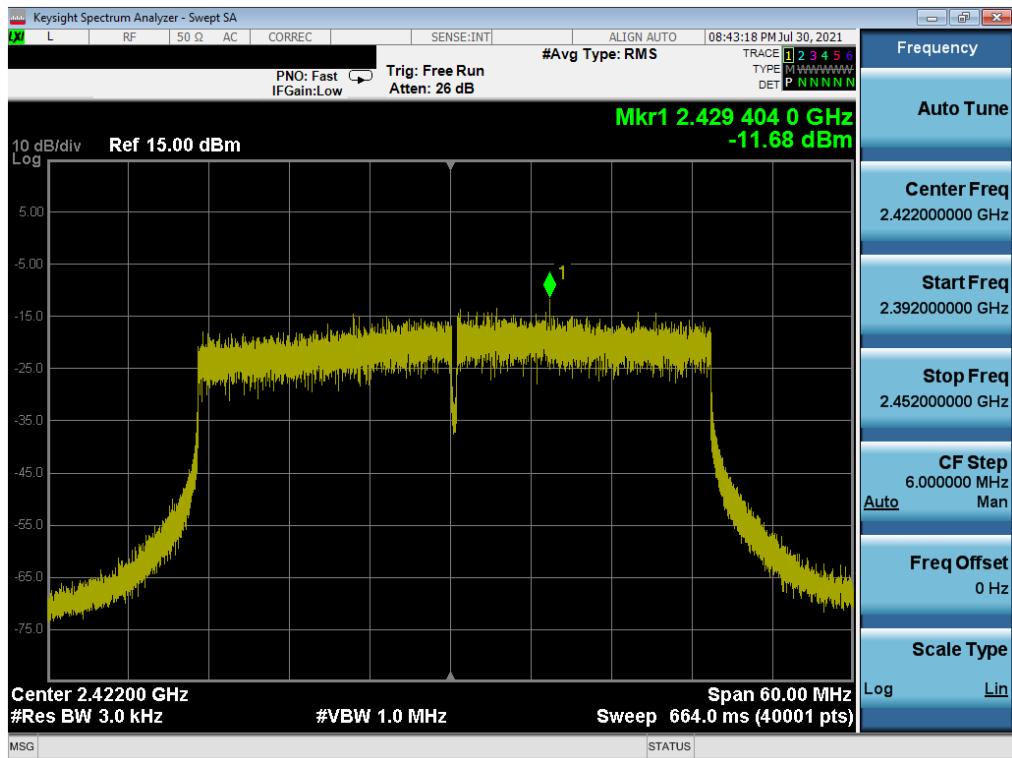


Plot 7-70. Power Spectral Density Plot MIMO NORTH (802.11ax 40MHz BW OFDMA – 484 Tones – Ch. 3)

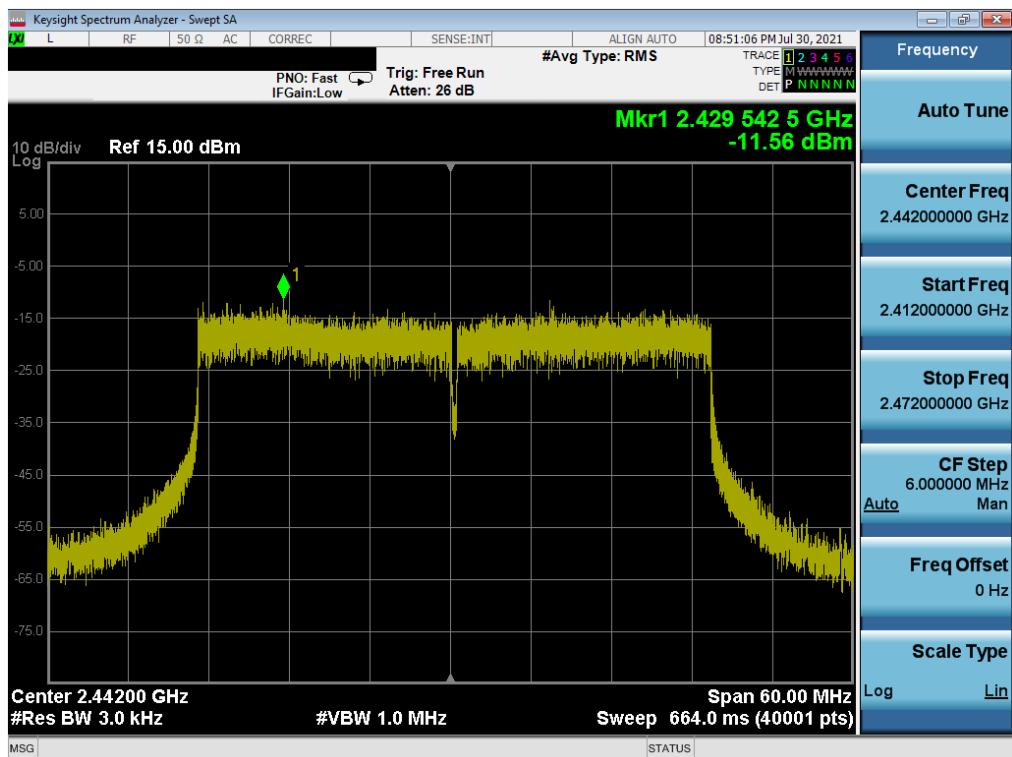

Plot 7-71. Power Spectral Density Plot MIMO NORTH (802.11ax 40MHz BW OFDMA – 484 Tones – Ch. 7)

FCC ID: C3K1995 IC: 3048A-1995	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset	Page 80 of 202

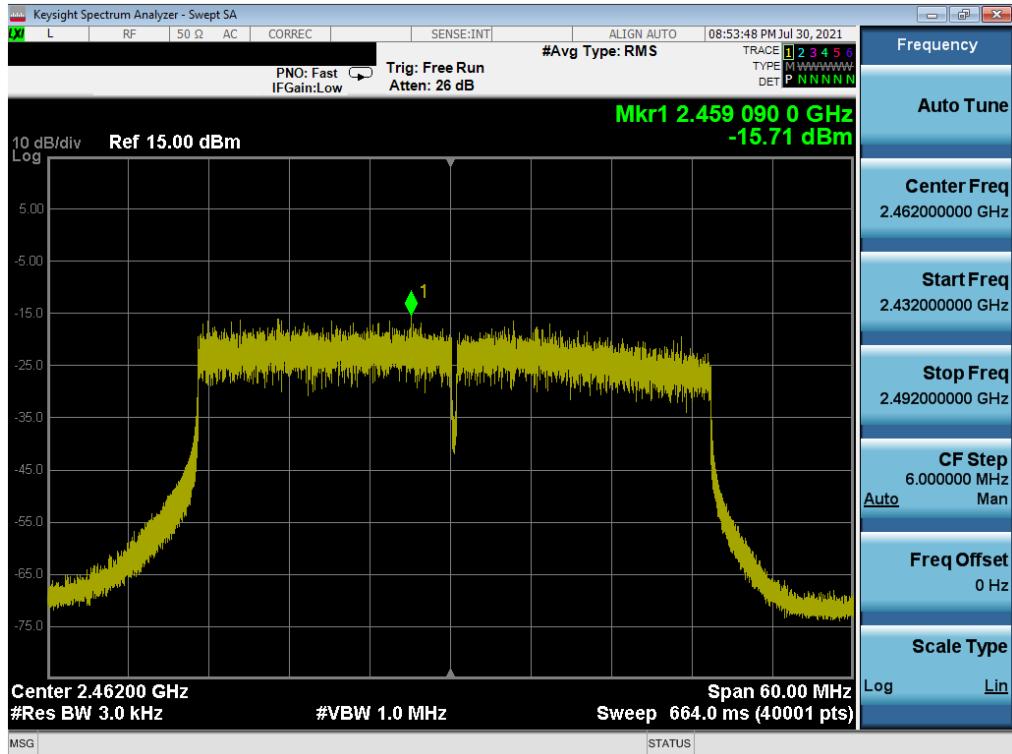

Note:

Per ANSI C63.10-2013 Section 14.3.2.2 and KDB 662911 D01 v02r01 Section E)2), the power spectral density at South Antenna and North Antenna were first measured separately as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Sample MIMO Calculation:

At 2412MHz the average conducted power spectral density was measured to be -0.43 dBm for SOUTH and -2.03 dBm for NORTH.

South Antenna + North Antenna = MIMO

$$(-0.43 \text{ dBm} + -2.03 \text{ dBm}) = (0.91 \text{ mW} + 0.63 \text{ mW}) = 1.53 \text{ mW} = 1.85 \text{ dBm}$$

FCC ID: C3K1995 IC: 3048A-1995	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset	Page 81 of 202

7.5 Conducted Emissions at the Band Edge

§15.247(d); RSS-247 [5.5]

Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates, tone configurations, and RU indices were investigated to determine the worst case configuration. For the following out of band conducted emissions plots at the band edge, the EUT was set to a data rate of MCS0 in 802.11ax mode as this setting produced the worst-case emissions.

The limit for out-of-band spurious emissions at the band edge is 30dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure (Section 7.4).

Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3
 KDB 558074 D01 v05r02 – Section 8.7.2

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW = 1MHz
5. Detector = Peak
6. Number of sweep points $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-4. Test Instrument & Measurement Setup

Test Notes


None

FCC ID: C3K1995 IC: 3048A-1995	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Microsoft	Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 82 of 202

SISO SOUTH Conducted Emissions at the Band Edge

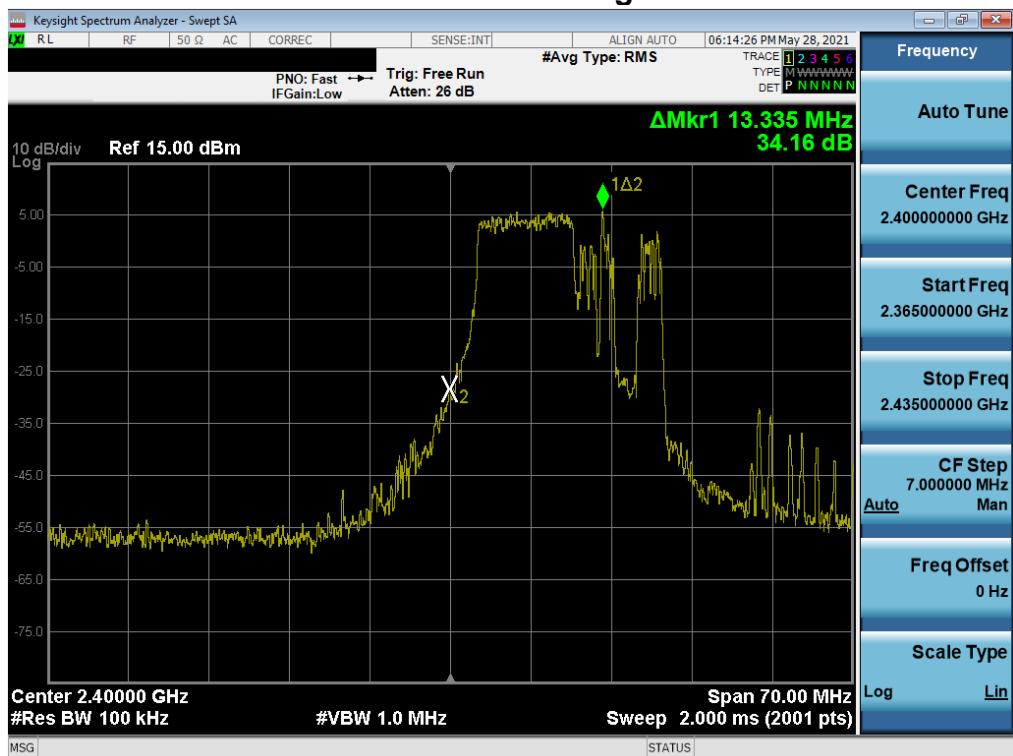


Plot 7-73. Band Edge Plot SISO SOUTH (802.11ax 20MHz BW OFDMA – 106 Tones – Ch. 1)

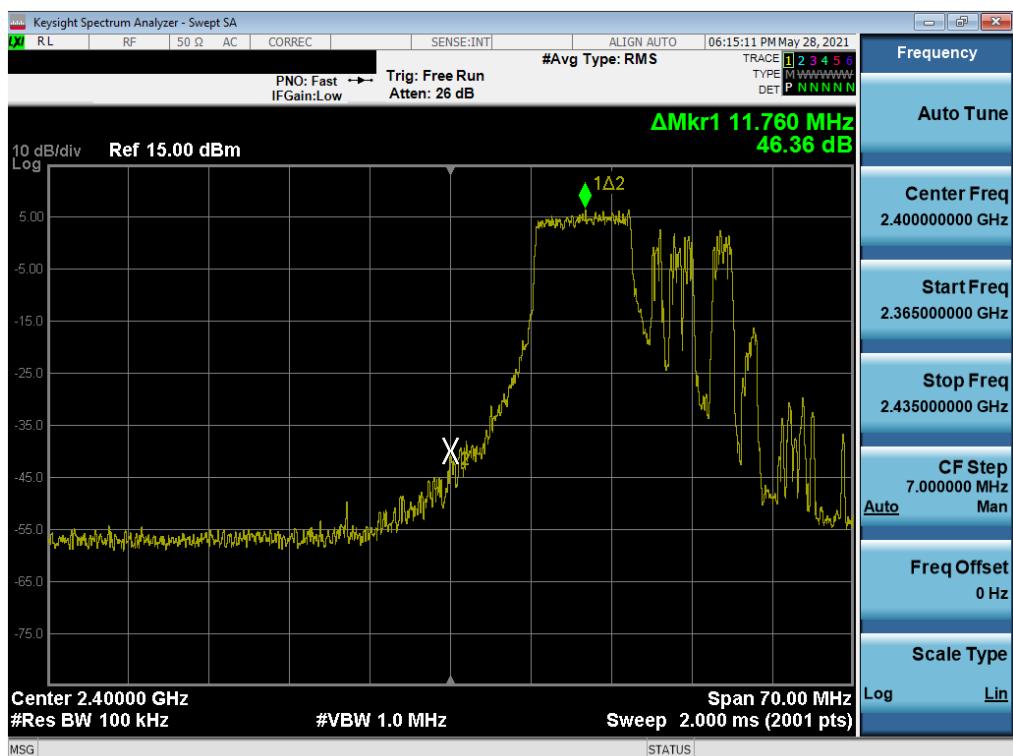


Plot 7-74. Band Edge Plot SISO SOUTH (802.11ax 20MHz BW OFDMA – 106 Tones – Ch. 2)

FCC ID: C3K1995 IC: 3048A-1995	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset	Page 83 of 202


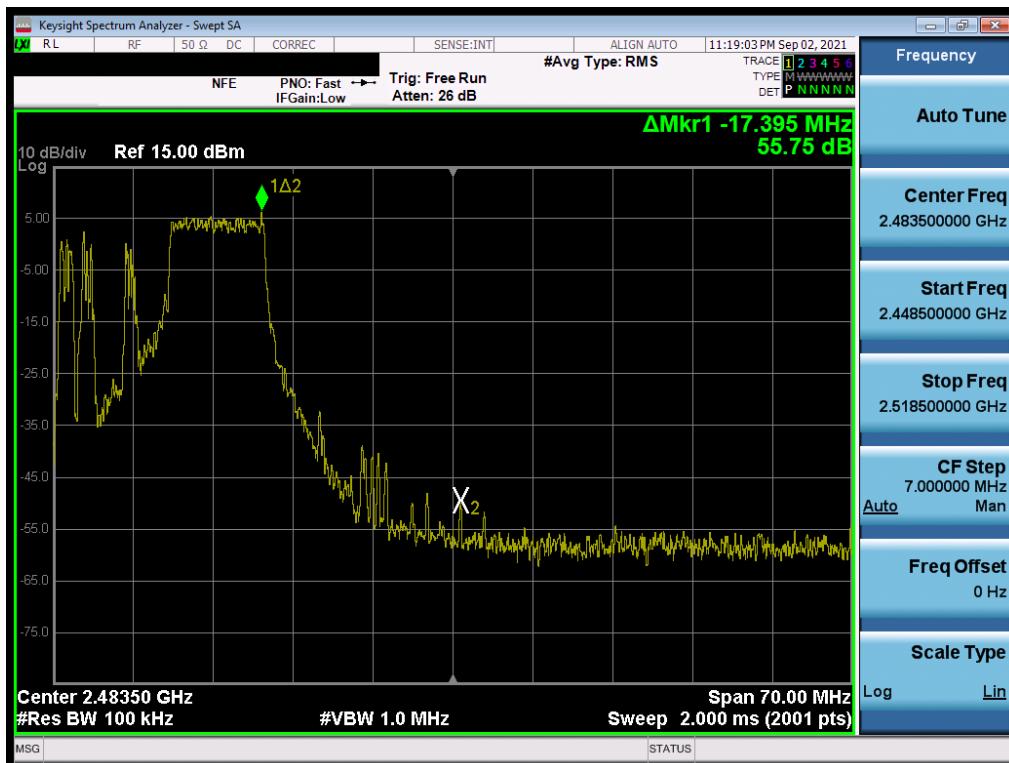


Plot 7-75. Band Edge Plot SISO SOUTH (802.11ax 20MHz BW OFDMA – 106 Tones – Ch. 10)

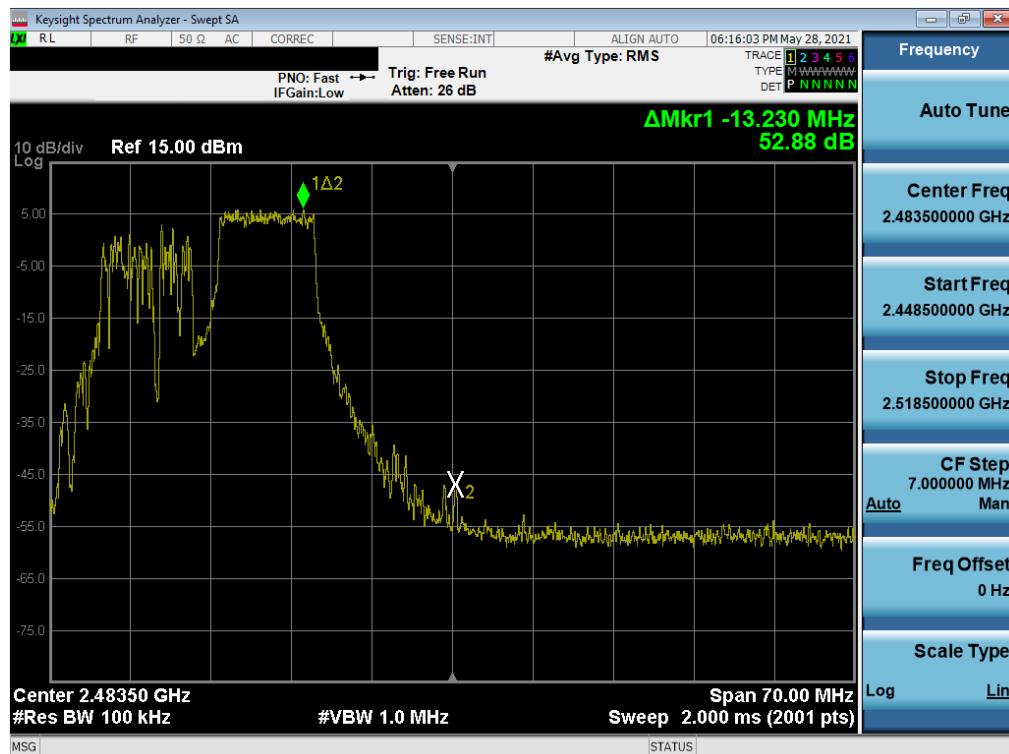




Plot 7-76. Band Edge Plot SISO SOUTH (802.11ax 20MHz BW OFDMA – 106 Tones – Ch. 11)

FCC ID: C3K1995 IC: 3048A-1995	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset	Page 84 of 202

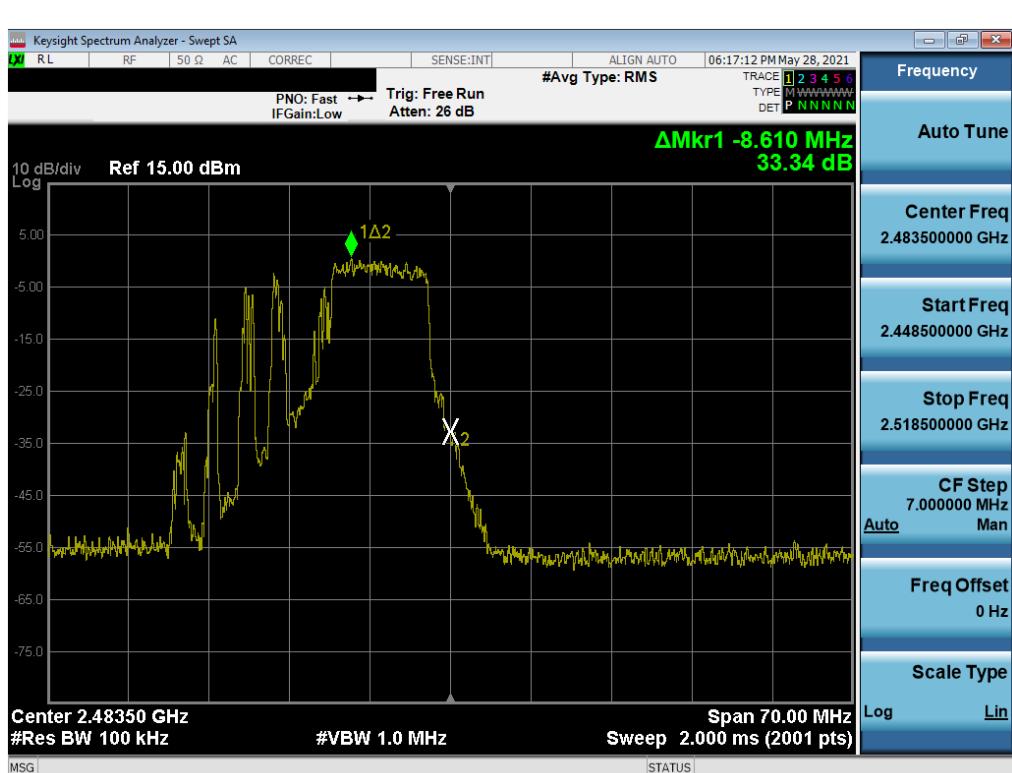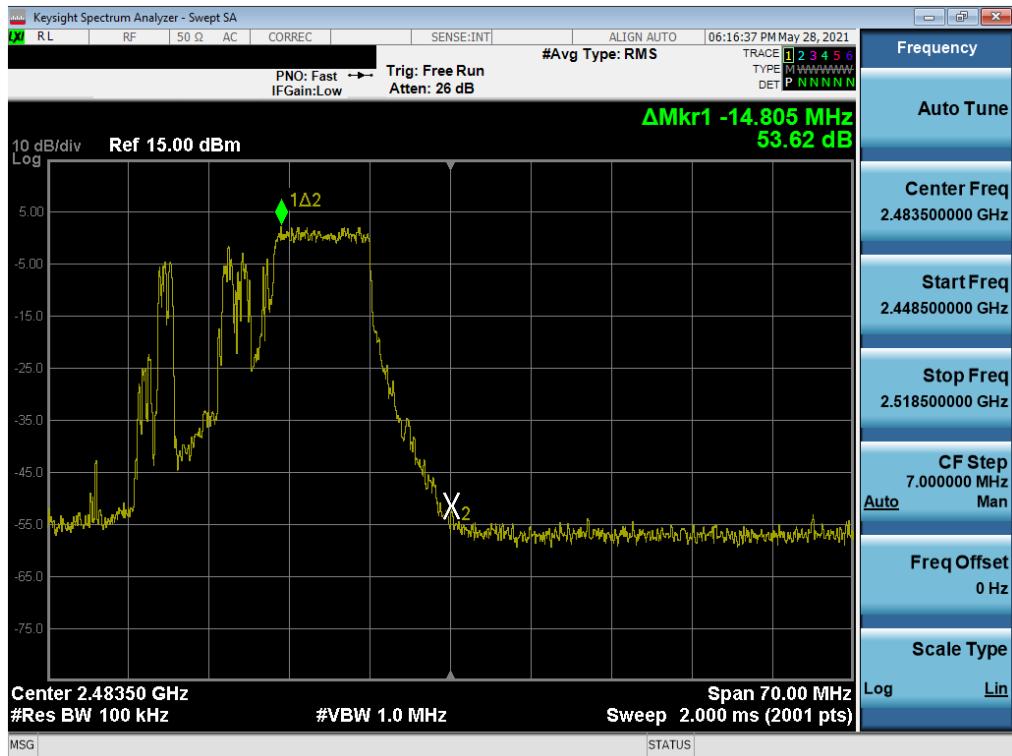

Plot 7-78. Band Edge Plot SISO SOUTH (802.11ax 20MHz BW OFDMA – 106 Tones – Ch. 13)

FCC ID: C3K1995 IC: 3048A-1995	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset	Page 85 of 202

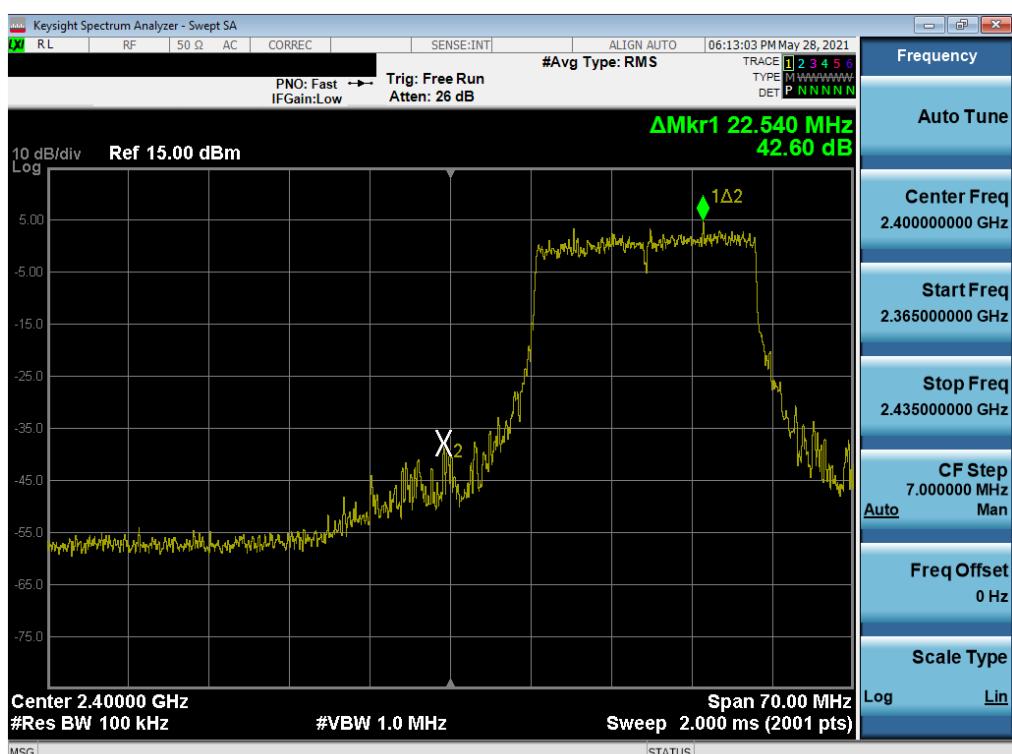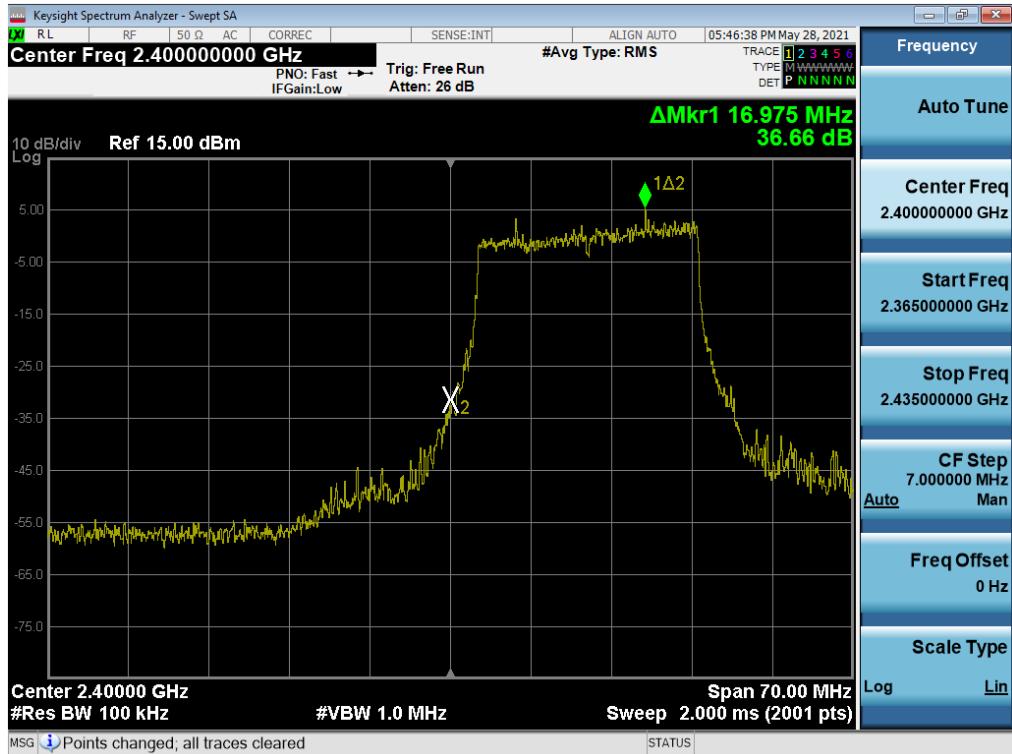

Plot 7-80. Band Edge Plot SISO SOUTH (802.11ax 20MHz BW OFDMA – 242 Tones – Ch. 2)

FCC ID: C3K1995 IC: 3048A-1995	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset	Page 86 of 202




Plot 7-81. Band Edge Plot SISO SOUTH (802.11ax 20MHz BW OFDMA – 242 Tones – Ch. 8)




Plot 7-82. Band Edge Plot SISO SOUTH (802.11ax 20MHz BW OFDMA – 242 Tones – Ch. 9)

FCC ID: C3K1995 IC: 3048A-1995	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset	Page 87 of 202

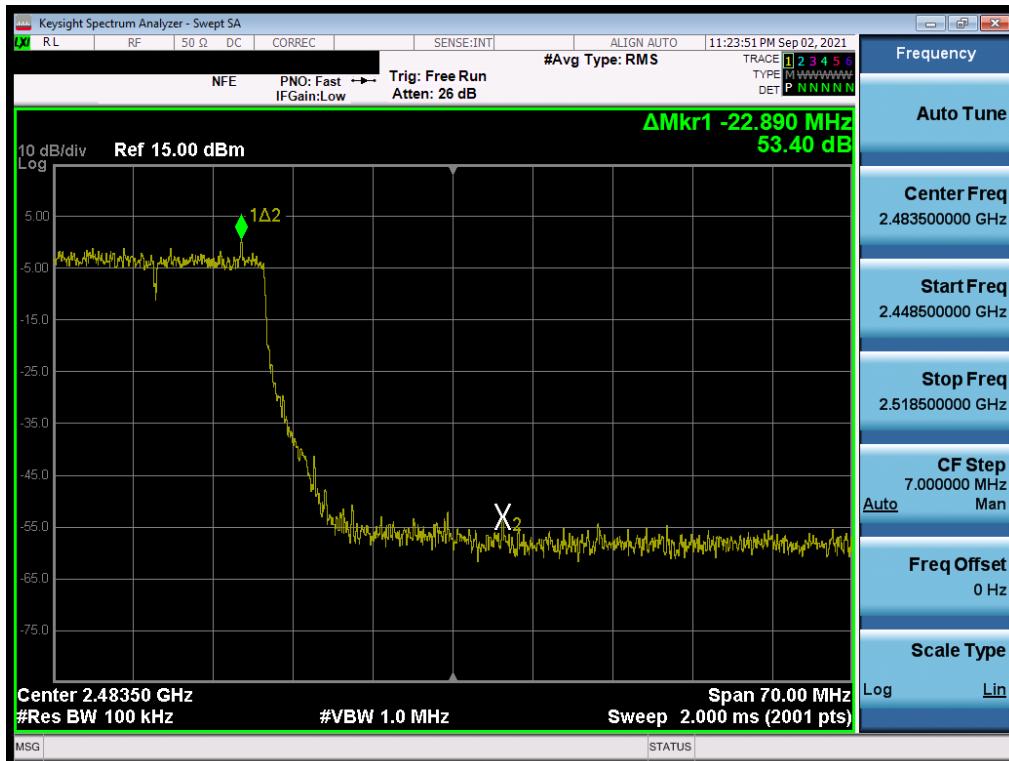


Plot 7-83. Band Edge Plot SISO SOUTH (802.11ax 20MHz BW OFDMA – 242 Tones – Ch. 10)

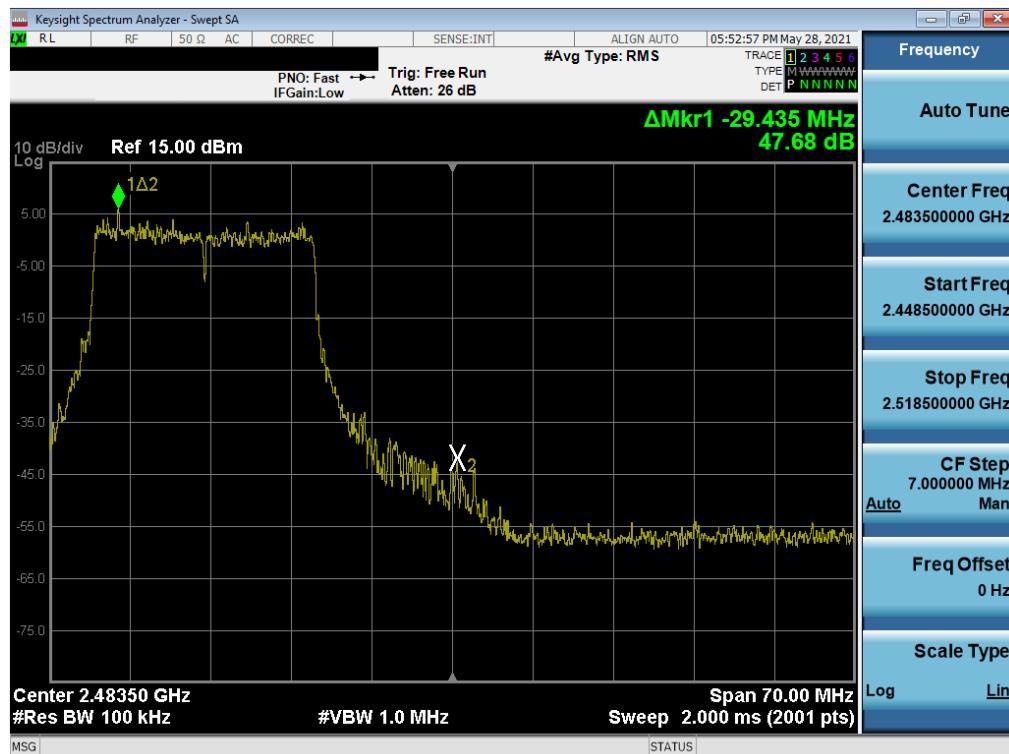

Plot 7-84. Band Edge Plot SISO SOUTH (802.11ax 20MHz BW OFDMA – 242 Tones – Ch. 11)

FCC ID: C3K1995 IC: 3048A-1995	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset	Page 88 of 202

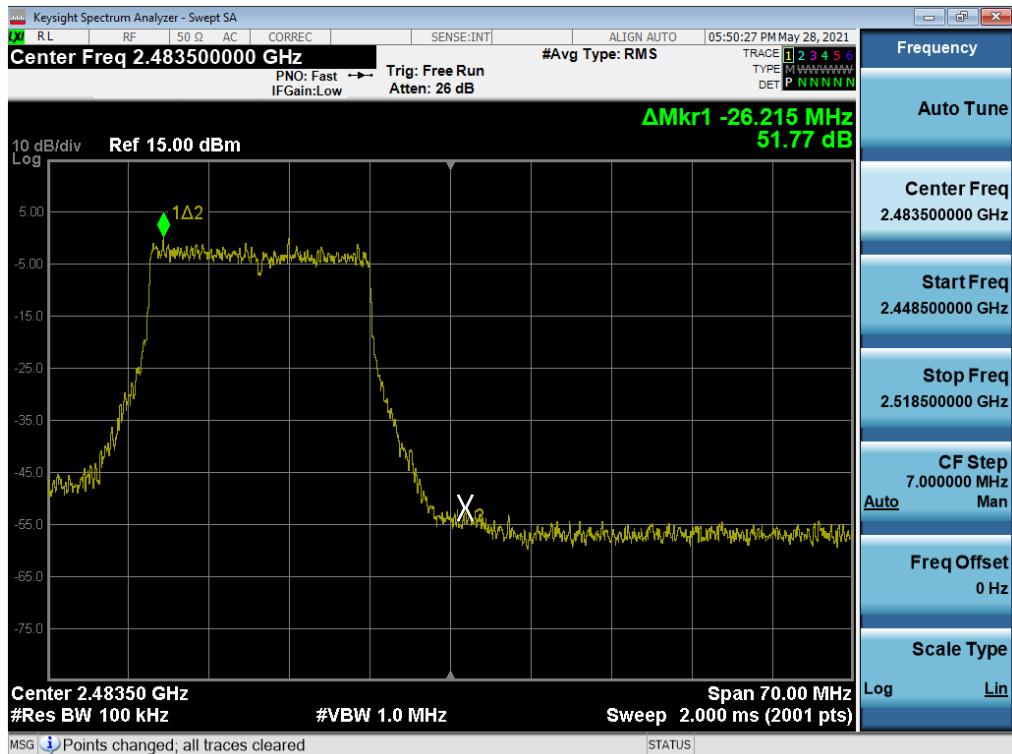


Plot 7-85. Band Edge Plot SISO SOUTH (802.11ax 20MHz BW OFDMA – 242 Tones – Ch. 12)




Plot 7-86. Band Edge Plot SISO SOUTH (802.11ax 20MHz BW OFDMA – 242 Tones – Ch. 13)

FCC ID: C3K1995 IC: 3048A-1995	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset	Page 89 of 202

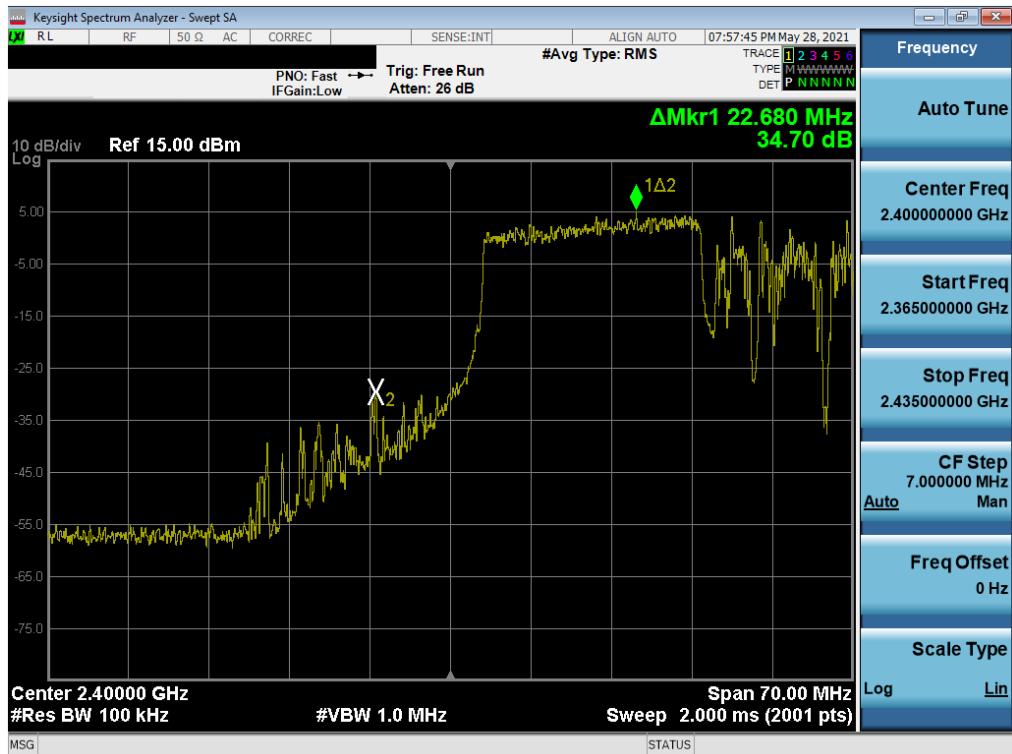


Plot 7-87. Band Edge Plot SISO SOUTH (802.11ax 40MHz BW OFDMA – 242 Tones – Ch. 3)

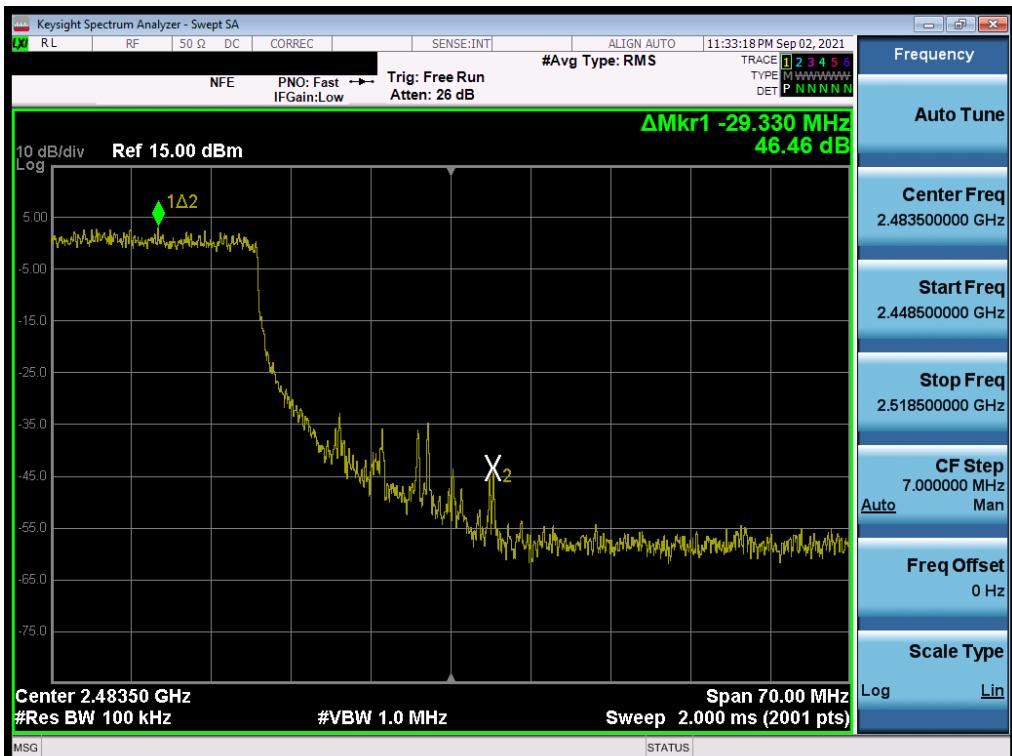


Plot 7-88. Band Edge Plot SISO SOUTH (802.11ax 40MHz BW OFDMA – 242 Tones – Ch. 8)

FCC ID: C3K1995 IC: 3048A-1995	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset	Page 90 of 202


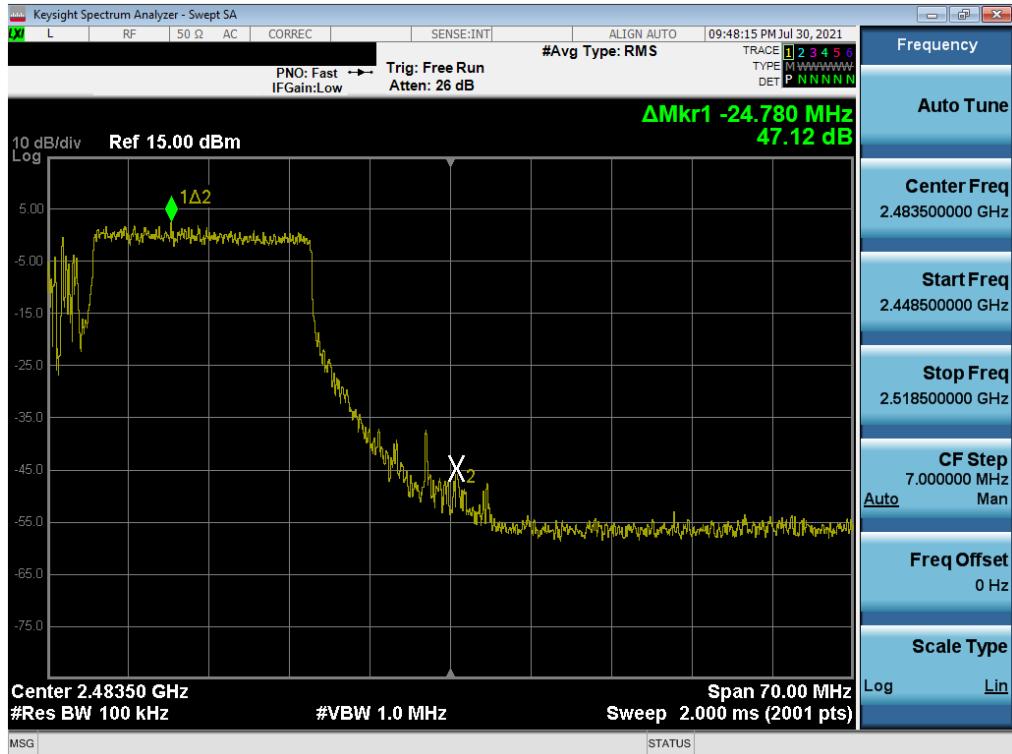


Plot 7-89. Band Edge Plot SISO SOUTH (802.11ax 40MHz BW OFDMA – 242 Tones – Ch. 9)


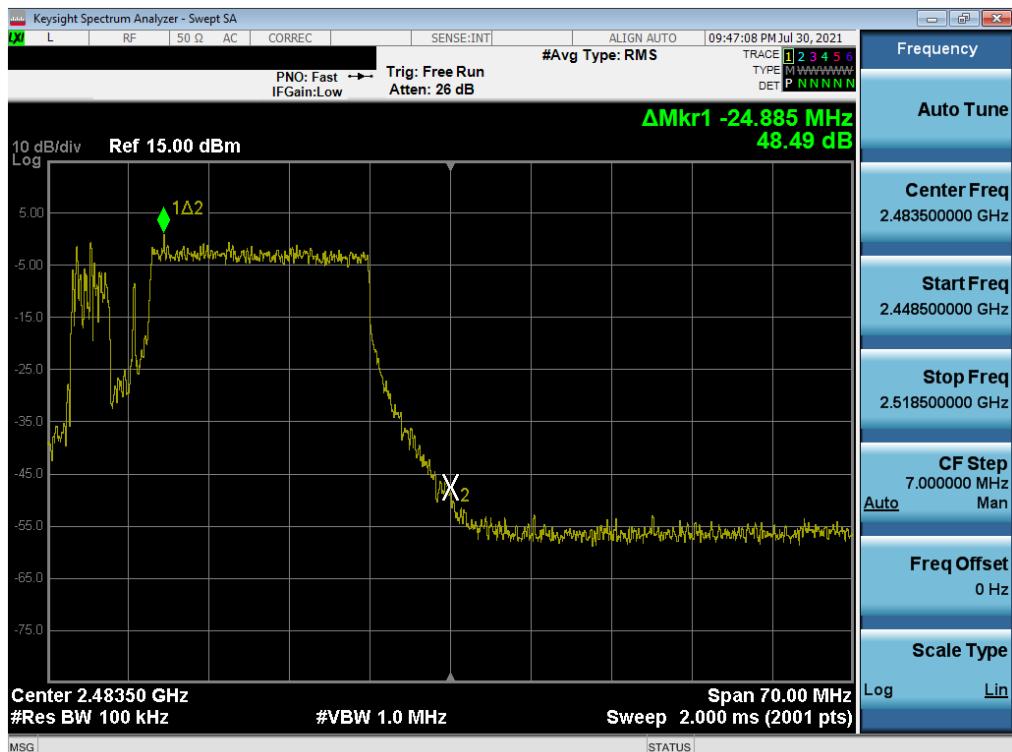


Plot 7-90. Band Edge Plot SISO SOUTH (802.11ax 40MHz BW OFDMA – 242 Tones – Ch. 10)



FCC ID: C3K1995 IC: 3048A-1995	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset	Page 91 of 202

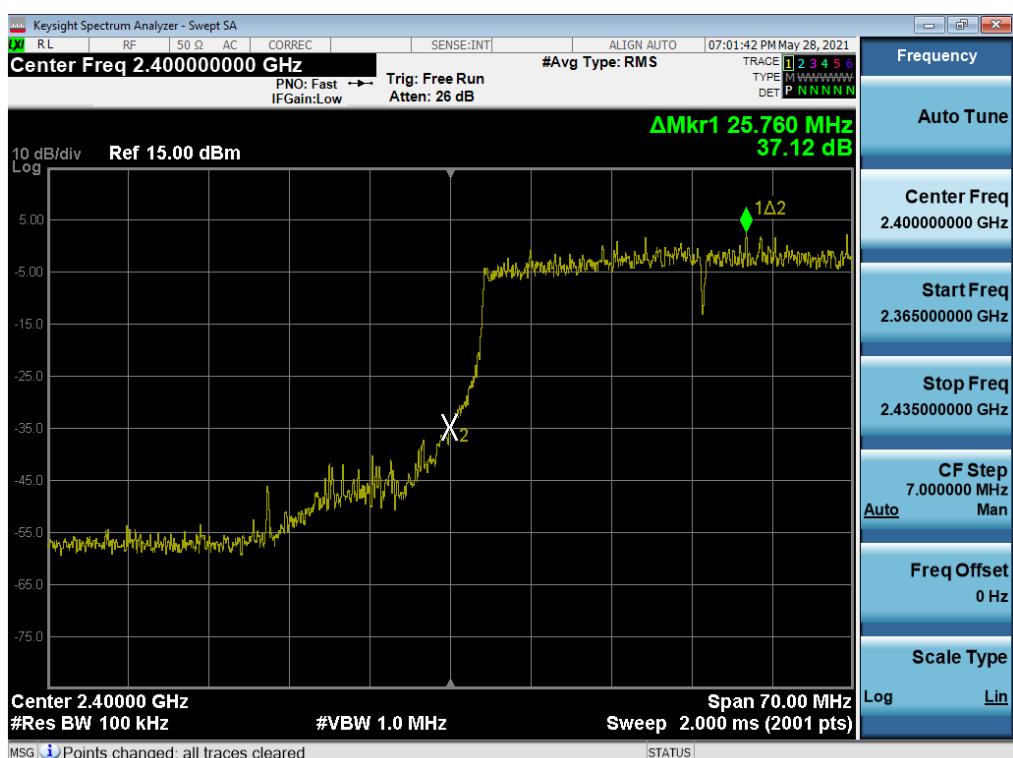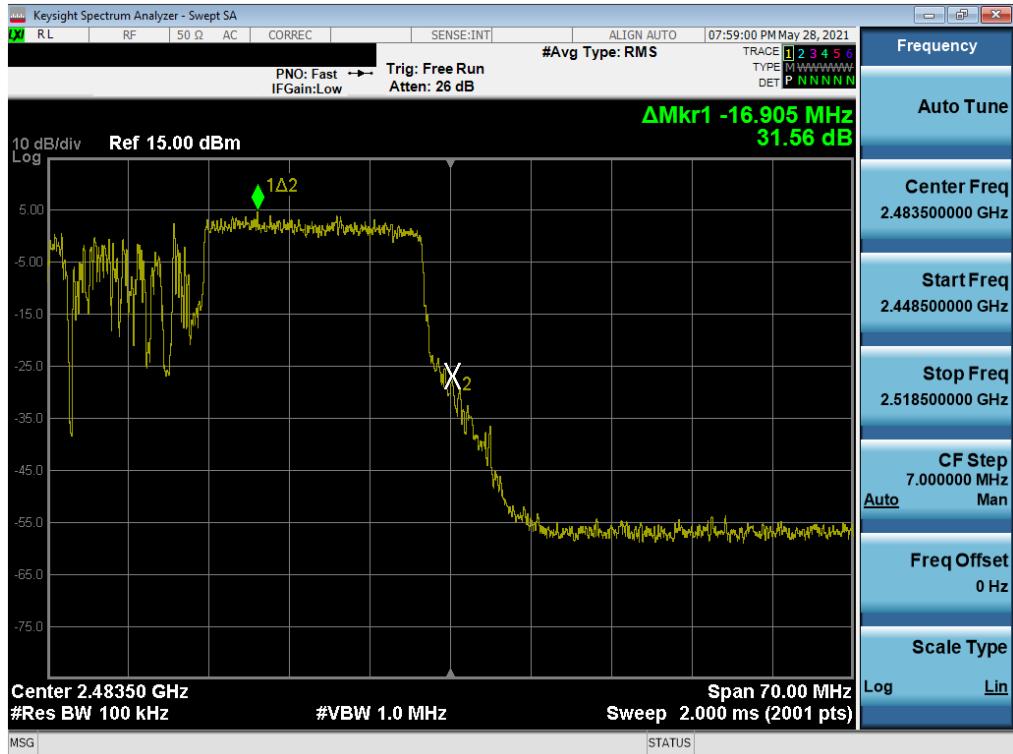

FCC ID: C3K1995 IC: 3048A-1995	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset	Page 92 of 202

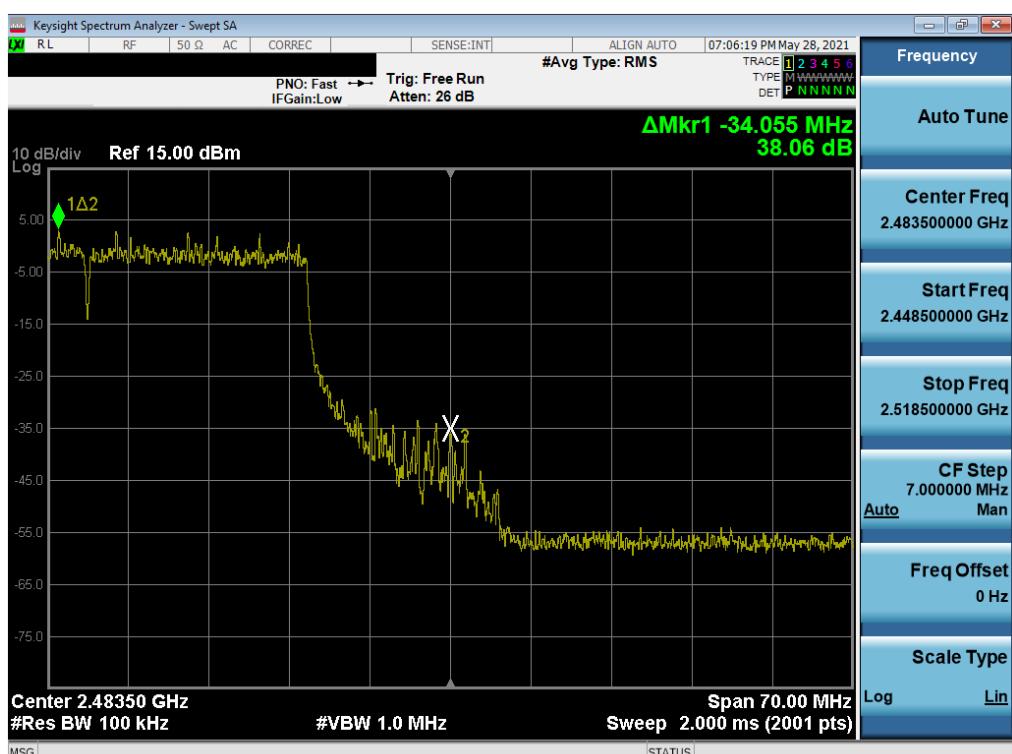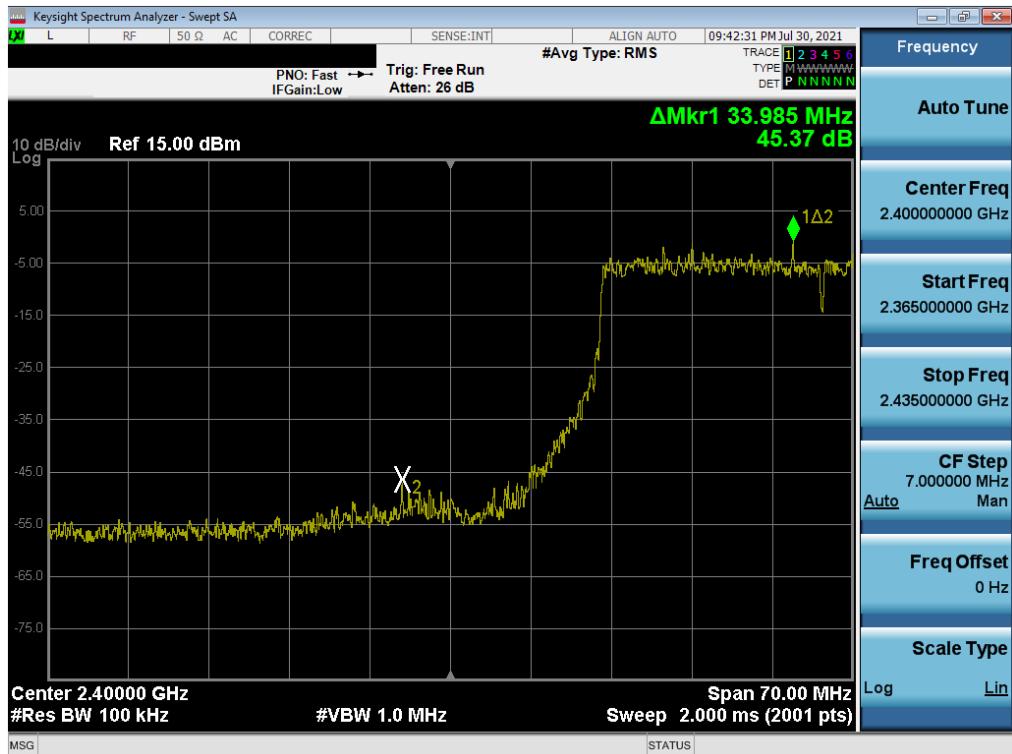


FCC ID: C3K1995 IC: 3048A-1995	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 93 of 202

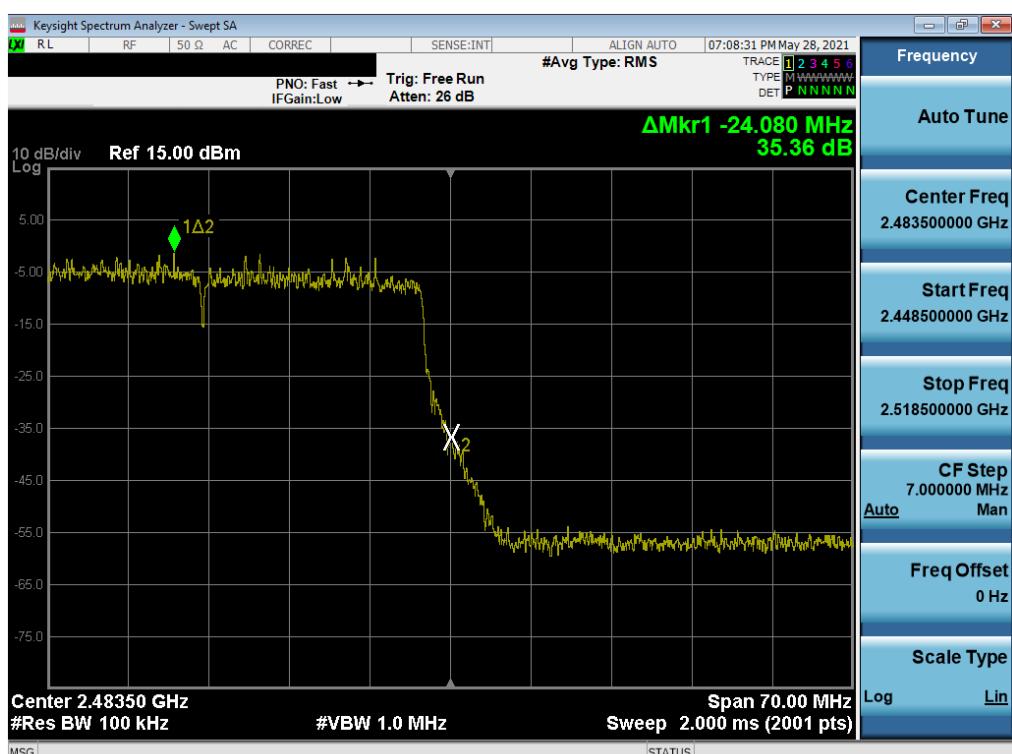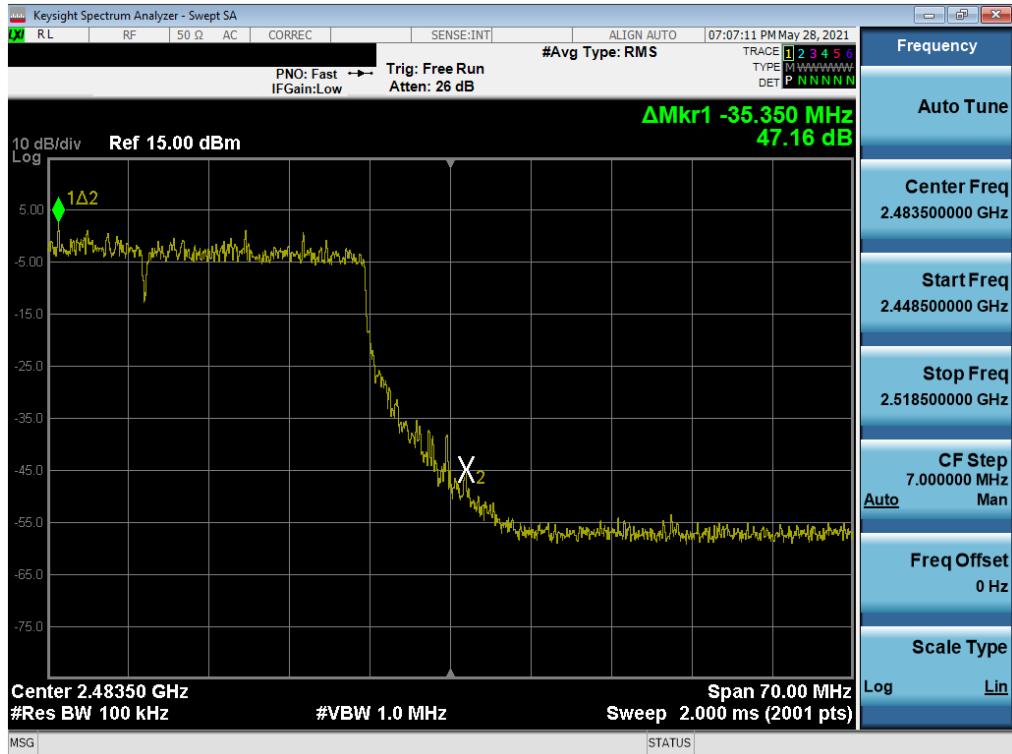


FCC ID: C3K1995 IC: 3048A-1995	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 94 of 202

SISO NORTH Conducted Emissions at the Band Edge

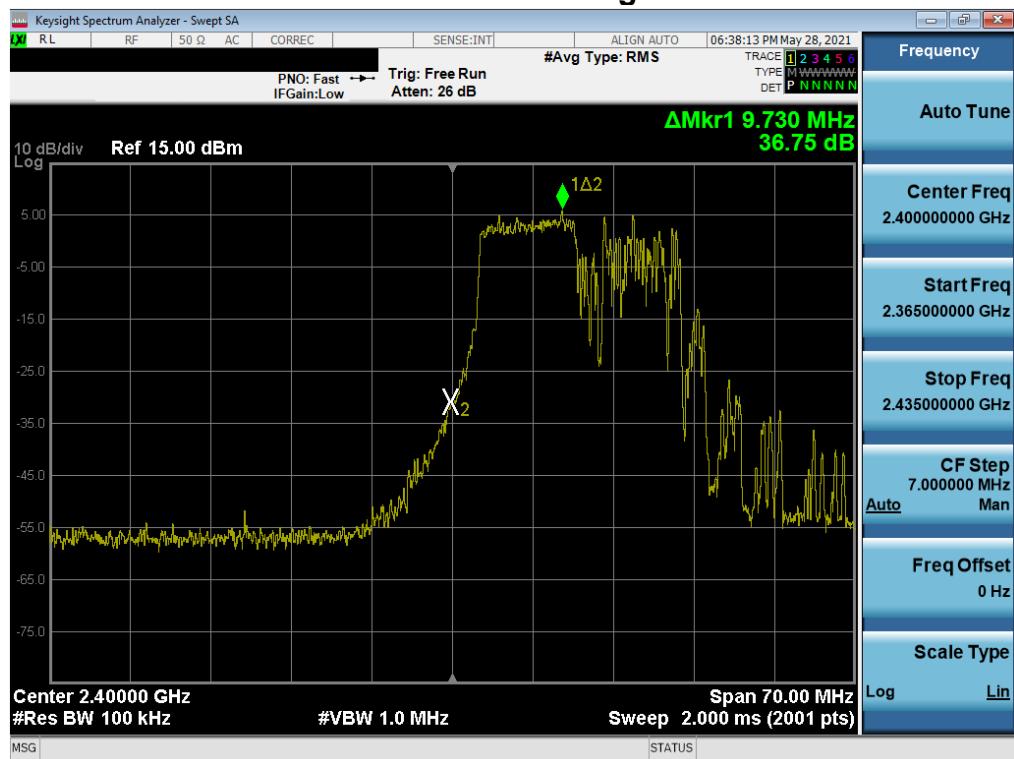


Plot 7-97. Band Edge Plot SISO NORTH (802.11ax 20MHz BW OFDMA – 106 Tones – Ch. 1)

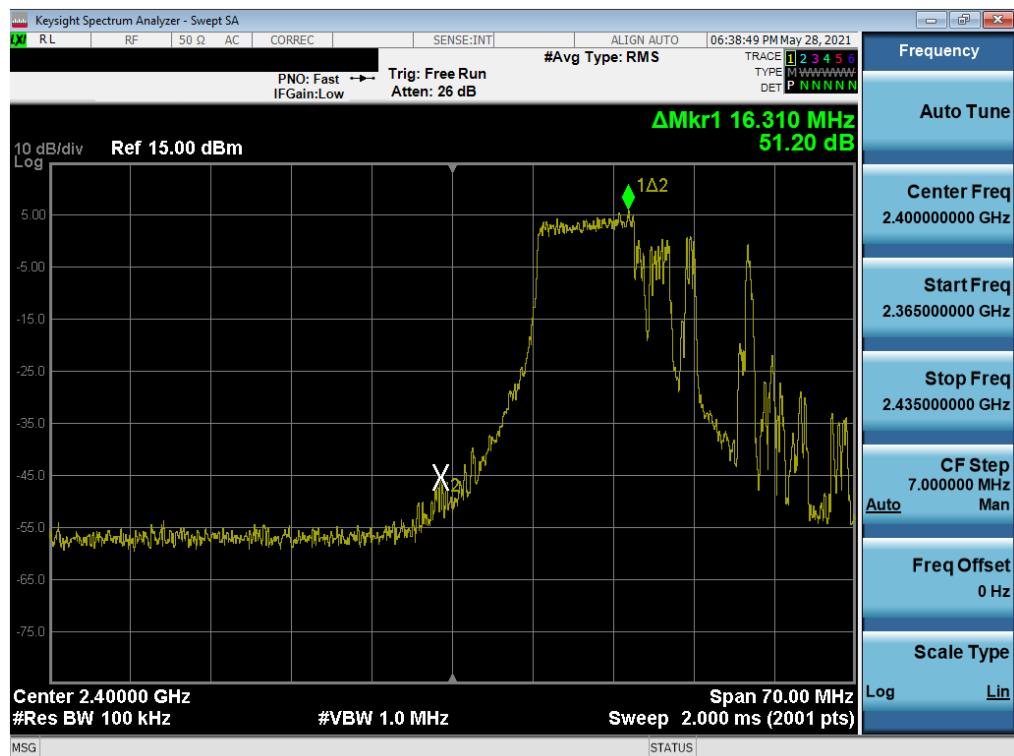


Plot 7-98. Band Edge Plot SISO NORTH (802.11ax 20MHz BW OFDMA – 106 Tones – Ch. 2)

FCC ID: C3K1995 IC: 3048A-1995	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 95 of 202

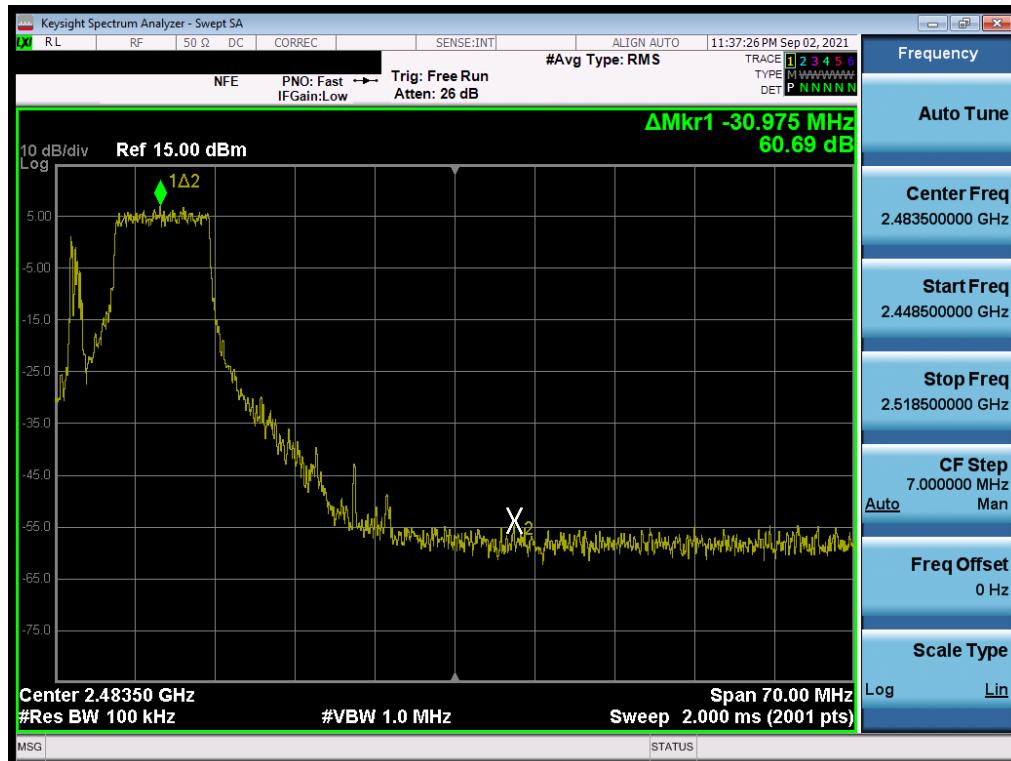


Plot 7-99. Band Edge Plot SISO NORTH (802.11ax 20MHz BW OFDMA – 106 Tones – Ch. 10)

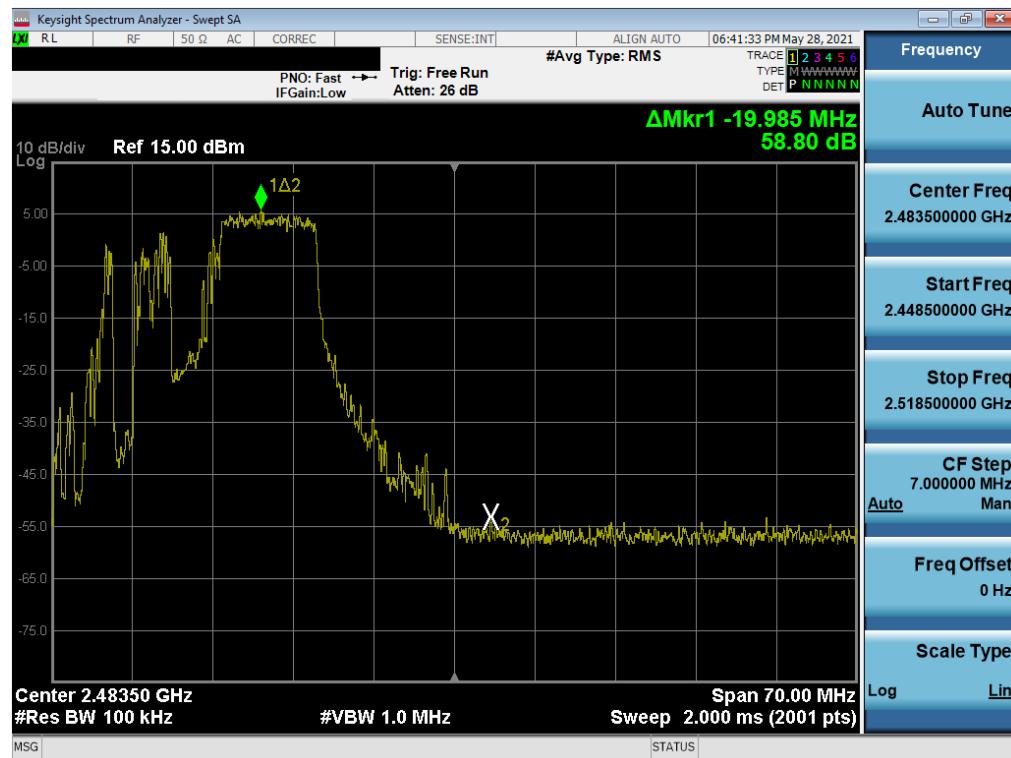


Plot 7-100. Band Edge Plot SISO NORTH (802.11ax 20MHz BW OFDMA – 106 Tones – Ch. 11)

FCC ID: C3K1995 IC: 3048A-1995	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset	Page 96 of 202

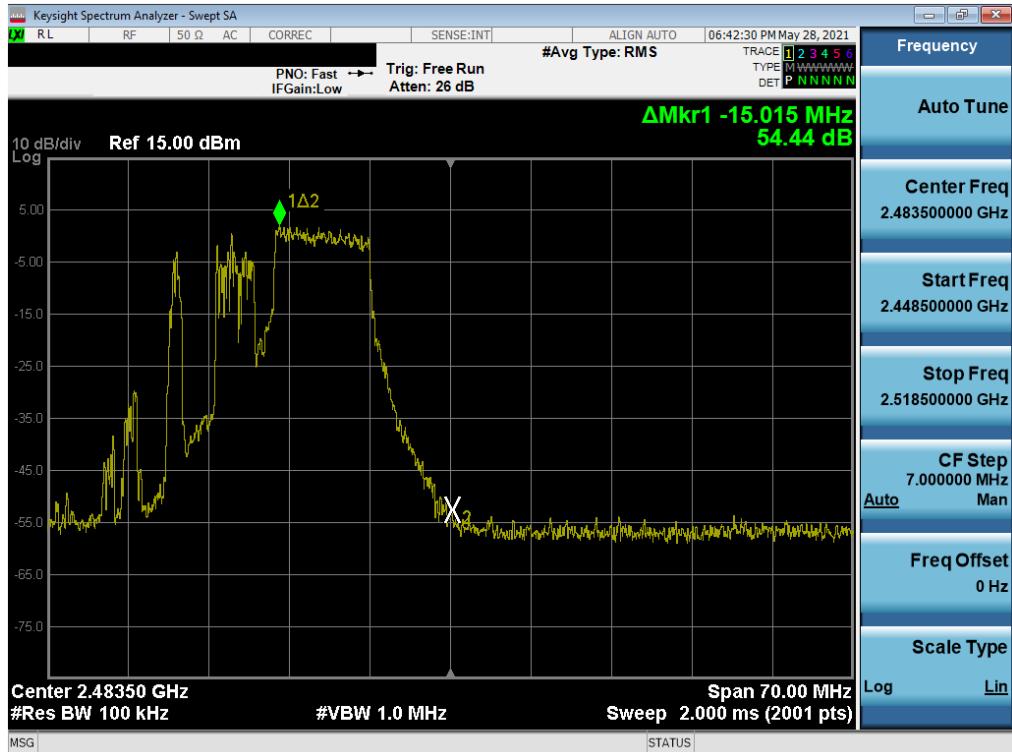

Plot 7-101. Band Edge Plot SISO NORTH (802.11ax 20MHz BW OFDMA – 106 Tones – Ch. 12)

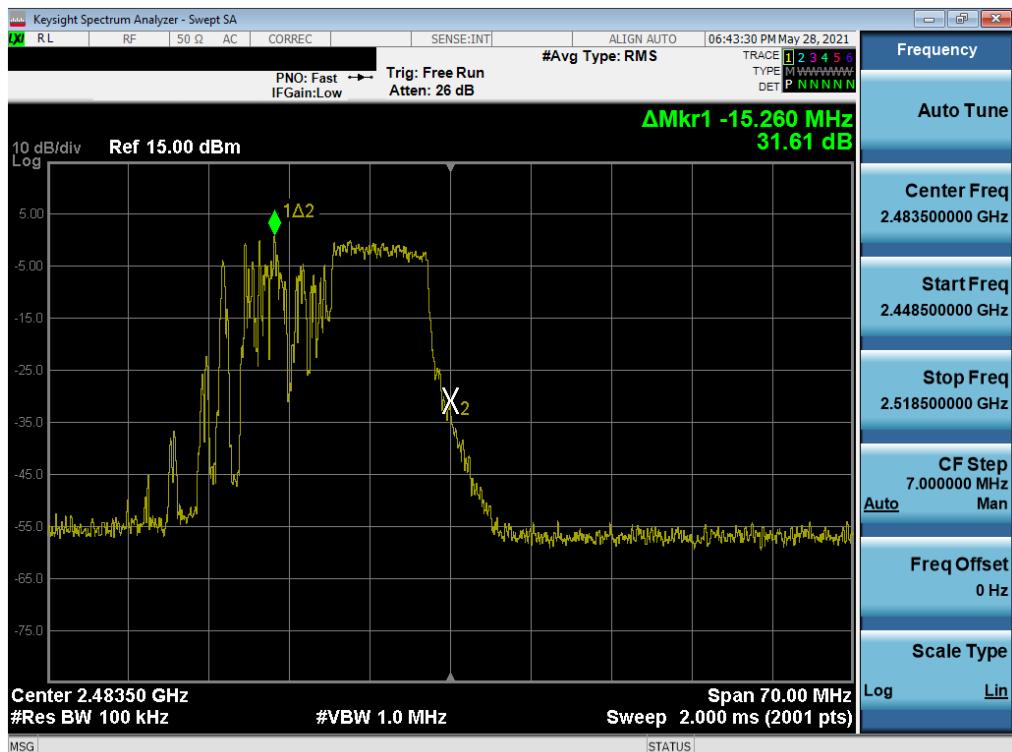

Plot 7-102. Band Edge Plot SISO NORTH (802.11ax 20MHz BW OFDMA – 106 Tones – Ch. 13)

FCC ID: C3K1995 IC: 3048A-1995	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2105060048-13.C3K	Test Dates: 05/20/2021 - 09/08/2021	EUT Type: Portable Handset		Page 97 of 202