

## **Nemko Korea Co., Ltd.**

155, 153 and 159, Osan-ro, Mohyeon-eup, Cheoin-gu, Yongin-si, Gyeonggi-do 16885 Republic of Korea  
TEL : + 82 31 330 1700 FAX : + 82 31 322 2332

# FCC EVALUATION REPORT FOR CERTIFICATION

**Applicant :**

**WINIADAEWOO Co., Ltd.  
509, Dunchon-daero, Jungwon-gu  
Gyeonggi-do, Korea, Republic of  
Attn : Mr. Youjin Choi**

**Dates of Issue : November 26, 2019**  
**Test Report No. : NK-19-E-0895**  
**Test Site : Nemko Korea Co., Ltd.**  
**EMC site, Korea**

## FCC ID

**C5F7NF1HMO950N**

## Trade Mark

**DAEWOO, BERTAZZONI, BEKO, BLOMBERG**

## Contact Person

WINIADAEWOO Co., Ltd.  
509, Dunchon-daero, Jungwon-gu,  
Seongnam-si, Gyeonggi-do, Korea, Republic of  
Mr. Youjin Choi  
Telephone No. : + 82 31 639 7754

Applied Standard :  
Classification :  
EUT Type :

## FCC Part 18 & Part 2 Consumer ISM equipment Microwave Oven

The device bearing the Trade Mark and FCC ID specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in MP-5:1986.

I attest to the accuracy of data and all measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

10

Nov 26, 2019

---

Tested By : Hyunsik Shin  
Engineer

*Weller* Nov 26, 2019

---

Reviewed By : Taegyun Kim  
Technical Manager

## TABLE OF CONTENTS

---

<b>SCOPE</b>	<b>3</b>
<b>INTRODUCTION (Site Description)</b>	<b>4</b>
<b>EUT INFORMATION</b>	<b>5</b>
<b>DESCRIPTION OF TESTS (Radiation Hazard)</b>	<b>6</b>
<b>DESCRIPTION OF TESTS (Input Power Measurement)</b>	<b>6</b>
<b>DESCRIPTION OF TESTS (Output Power Measurement)</b>	<b>6</b>
<b>DESCRIPTION OF TESTS (Frequency Measurements)</b>	<b>6</b>
<b>DESCRIPTION OF TESTS (Conducted Emissions)</b>	<b>7</b>
<b>DESCRIPTION OF TESTS (Radiated Emissions)</b>	<b>8</b>
<b>TEST DATA (Radiation Hazard)</b>	<b>9</b>
<b>TEST DATA (Input Power Measurement)</b>	<b>9</b>
<b>TEST DATA (RF Output Power Measurement)</b>	<b>9</b>
<b>TEST DATA (Frequency Measurements)</b>	<b>10</b>
<b>TEST DATA (Conducted Emissions)</b>	<b>12</b>
<b>TEST DATA (Radiated Emissions)</b>	<b>15</b>
<b>PLOT OF EMISSIONS (Frequency Measurements)</b>	<b>22</b>
<b>ACCURACY OF MEASUREMENT</b>	<b>61</b>
<b>LIST OF TEST EQUIPMENT</b>	<b>64</b>
<b>APPENDIX A - SAMPLE LABEL</b>	<b>65</b>
<b>APPENDIX B - PHOTOGRAPHS OF TEST SET-UP</b>	<b>66</b>
<b>APPENDIX C - EUT PHOTOGRAPHS</b>	<b>71</b>
<b>APPENDIX D - SCHEMATIC DIAGRAM</b>	<b>83</b>
<b>APPENDIX E - USER'S MANUAL</b>	<b>84</b>
<b>APPENDIX F - BLOCK DIAGRAM</b>	<b>85</b>

## SCOPE

*Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission under FCC part 18.*

**Responsible Party :** WINIADAEGOO Co., Ltd.

**Contact Person :** Mr. Youjin Choi

Tel No.: + 82 31 639 7754

**Manufacturer :** WINIADAEGOO Co., Ltd.

509, Dunchon-daero, Jungwon-gu,

Seongnam-si, Gyeonggi-do, Korea, Republic of

- FCC ID: C5F7NF1HMO950N
- Model: KOT-1H\*U8, KOTR30MXE, MWOTR30102SS, BOTR30102SS

Note) The asterisk "\*" can be any alphanumeric character (A-Z or 0-9) to denote enclosure design.

- Trade Mark: DAEWOO, BERTAZZONI, BEKO, BLOMBERG
- EUT Type: Microwave Oven
- Applied Standard: FCC Part 18 & Part 2
- Test Procedure(s): MP-5:1986
- Dates of Test: October 30, 2019 to November 15, 2019
- Place of Tests: Nemko Korea Co., Ltd. EMC Site
- Test Report No.: NK-19-E-0895

**\* The model KOT-1H\*U8 was tested for the representative model.**

## INTRODUCTION

The measurement procedure described in MP5:1986 for Methods of Measurement of radiated, powerline conducted radio noise, frequency and power output was used in determining emissions emanating from **WINIADAEWOO Co., Ltd.**

FCC ID : **C5F7NF1HMO950N**, Microwave Oven.

These measurement tests were conducted at **Nemko Korea Co., Ltd. EMC Laboratory**.

The site address is 155, 153 and 159, Osan-ro, Mohyeon-eup, Cheoin-gu, Yongin-si, Gyeonggi-do 16885 Republic of Korea

The area of Nemko Korea Corporation Ltd. EMC Test Site is located in a mountain area at 80 kilometers (48 miles) southeast and Incheon International Airport (Incheon Airport), 30 kilometers (18 miles) south-southeast from central Seoul.

The Nemko Korea Co., Ltd. has been accredited as a Conformity Assessment Body (CAB).



Nemko Korea Co., Ltd.  
155, 153 and 159, Osan-ro, Mohyeon-eup, Cheoin-gu, Yongin-si, Gyeonggi-do  
16885 Republic of Korea  
Tel) + 82 31 330 1700  
Fax) + 82 31 322 2332

Fig. 1. The map above shows the Seoul in Korea vicinity area.

The map also shows Nemko Korea Corporation Ltd. EMC Lab and Incheon Airport.

## EUT INFORMATION

---

### EUT Information

Intended use	Household
Type of appliance	Microwave Oven
Model	KOT-1H*U8, KOTR30MXE, MWOTR30102SS, BOTR30102SS
Rated voltage & frequency	a.c. 120 V, 60 Hz Single Phase
Rated power output	950 W
Rated power consumption(MW)	1 500 W
Magnetron	RM269 (DAEWOO)

### Component List

Item	Model	Manufacturer	Serial Number
Magnetron	RM269	DAEWOO	N/A
Thermally Protected L. Air Over	OBB-22102X1	OH SUNG	N/A
Synchronous Motor	TYJ50-8A2	FOSHAN SHUNDE HENGXING	N/A
FAN MOTOR	OEM-15DWX1-B07	OH SUNG	N/A
Diode H.V.	CL01-12	GAOXING	N/A
Trans H.V	DLAS95A0-1	QINGDAO YUNLU ENERGY TECHNOLOGY CO., LTD.	N/A
H.V. CAPACITOR	2100VAC 0.98uF	BiCai	N/A
Noise Filter	DWLF-M30YL	YUNLU	N/A
Main Board	M381	KING BOARD	N/A
LED Board	KELSP-04-1002	KEI	N/A

## ***DESCRIPTION OF TESTS***

---

### **Radiation Hazard**

A 700 ml water load was placed in the center of the oven.

The power setting was set to maximum power.

While the oven was operating, the Microwave Survey Meter probe was moved slowly around the door seams to check for leakage.

### **Input Power Measurement**

A 700 ml water load was placed in the center of the oven and the oven set to maximum power. A 700 ml water load was chosen for its compatibility.

Input power and current were measured using a Power Analyzer.

Manufacturers to determine their input ratings commonly use this procedure.

### **Output Power Measurement**

The Caloric Method was used to determine maximum output power.

The initial temperature of a 1000 ml water load was measured. The water load was placed in the center of the oven. The oven was operated at maximum output power for 47 seconds. Then the temperature of the water re-measured.

### **Frequency Measurements**

Following the above test, after operating the oven long enough to assure that stable operating temperature were obtained, the operating frequency was monitored as the input voltage was varied between 80 percent to 125 percent of the nominal rating.

And the load quantity was reduced by evaporation to approximately 20 % of the original quantity with nominal rating.

## DESCRIPTION OF TESTS

### Conducted Emissions

The Line conducted emission test facility is located inside a 4 x 7 x 2.5 m shielded enclosure.

It is manufactured by EM engineering. The shielding effectiveness of the shielded room is in accordance with MIL-STD-285 or NSA 65-6.

A 1 m x 1.5 m wooden table 0.8 m height is placed 0.4 m away from the vertical wall and 0.5 m away from the side of wall of the shielded room Rohde & Schwarz (ENV216) and Rohde & Schwarz (ESH2-Z5) of the 50 ohm / 50 uH Line Impedance Stabilization Network(LISN) are bonded to the shielded room.

The EUT is powered from the Rohde & Schwarz (ENV216) LISN and the support equipment is powered from the Rohde & Schwarz (ESH2-Z5) LISN.

Power to the LISN s are filtered by high-current high insertion loss power line filters.

The purpose of filter is to attenuate ambient signal interference and this filter is also bonded to shielded enclosure. All electrical cables are shielded by tinned copper zipper tubing with inner diameter of 1/2".

If d.c. power device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the LISNs,

All interconnecting cables more than 1 m were shortened by non-inductive bundling (serpentine fashion) to a 1 m length.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT. The spectrum was scanned from 150 kHz to 30 MHz with 15 s sweep time.

The frequency producing the maximum level was re-examined using the EMI test receiver. (Rohde & Schwarz ESCI).

The detector functions were set to quasi-peak mode & CISPR average mode.

The bandwidth of receiver was set to 9 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission.

Each emission was maximized by; switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and of support equipment, and powering the monitor from the floor mounted outlet box and computer aux a.c. outlet, if applicable; whichever determined the worst case emission.

Each EME reported was calibrated using the R&S signal generator.

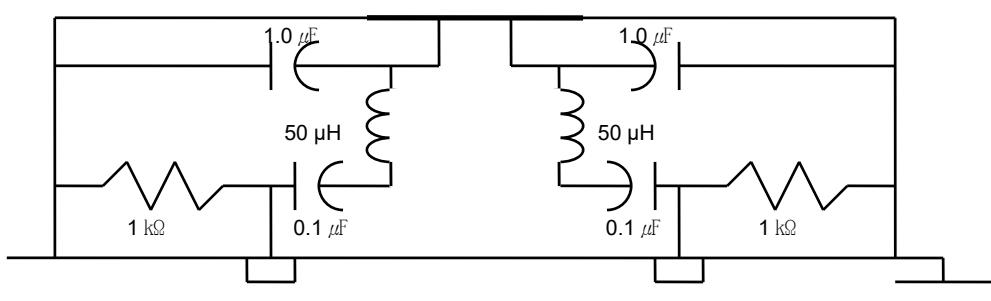


Fig. 2. LISN Schematic Diagram

## DESCRIPTION OF TESTS

### Radiated Emissions

Measurement were made indoors at 10 m & 3 m using antenna, signal conditioning unit and EMI test receiver to determine the frequency producing the maximum EME.

Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The Technology configuration, clock speed, mode of operation or video resolution, turntable azimuth with respect to the antenna was note for each frequency found.

The spectrum was scanned from 0.15 MHz to 30 MHz using Loop Antenna

(ROHDE & SCHWARZ/HFH2-Z2)

and from 30 MHz to 1000 MHz using TRILOG Broadband Test Antenna (Schwarzbeck, VULB 9163).

Above 1 GHz, Double Ridged Broadband Horn antenna (Schwarzbeck, HF907) was used.

Final Measurements were made indoors at 3 m using Loop Antenna

(ROHDE & SCHWARZ/HFH2-Z2) for measurement from 0.15 to 30 MHz with RBW 9 kHz and

made indoor at 10 m using TRILOG Broadband Test Antenna (Schwarzbeck, VULB 9163) for measurement from 30 MHz to 1000 MHz with RBW 120 kHz and made indoors at 3 m using Double Ridged Broadband Horn antenna (Schwarzbeck, HF907) for measurement from 1 GHz to 18 GHz with RBW 1 MHz.

The detector function were set to quasi peak mode and the bandwidth of the receiver were set to 9 kHz, 120 kHz and peak mode 1 MHz depending on the frequency or type of signal.

The Double Ridged Broadband Horn antenna was tuned to the frequency found during preliminary radiated measurements.

The EUT support equipment and interconnecting cables were re-configured to the setup producing the maximum emission for the frequency and were placed on top of a 0.8 m high non- metallic 1.0 X 1.5 meter table.

The EUT, support equipment and interconnecting cables were re-arranged and manipulated to maximize each EME emission.

The EUT is rotated about its vertical axis on the turntable, and the polarization and height of the receiving antenna are varied to obtain the highest field strength on the particular frequency under observation.

Each EME reported was calibrated using the R/S signal generator.

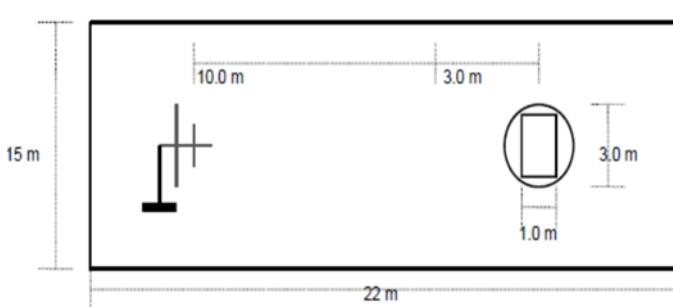


Fig. 3. Dimensions of 10 semi anechoic chamber

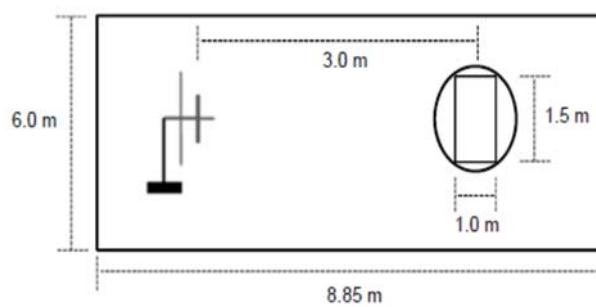


Fig. 4. Dimensions of 3 m full anechoic chamber

## TEST DATA

---

### Radiation Hazard

Probe Location	Maximum Leakage [mW/Cm <sup>2</sup> ]	Limit [mW/Cm <sup>2</sup> ]
1	0.2	1.00
2	0.15	1.00
Other	0.1	1.00

### Input Power Measurement

Operation mode	P rated (W)	P (W)	dP (%)	Required dP (%)
Power Input	1 500	1 506	0.4	+ 15 %

### Output Power Measurement

Quantity of Water [ml]	Mass of the container [g]	Ambient temperature [°C]	Initial temperature [°C]	Final temperature [°C]	Heating time [s]	Power output [W]
1 000	400	20.0	10.0	19.7	44	922

Formula :

$$P = \frac{4.187 \times m_w \times (T_1 - T_0) + 0.55 \times m_c \times (T_1 - T_A)}{t}$$

**NOTE :**

**P** is the microwave power output (W)

**m<sub>w</sub>** is the mass of the water (g)

**m<sub>c</sub>** is the mass of the container (g)

**T<sub>A</sub>** is the ambient temperature (°C)

**T<sub>0</sub>** is the initial temperature of the water (°C)

**T<sub>1</sub>** is the final temperature of the water (°C)

**t** is the heating time (s), excluding the magnetron filament heating-up time.



---

Tested by : **Hyunsik Shin**

## TEST DATA

### Frequency measurements

#### ► Frequency vs Line Voltage Variation Test

[Room Temperature :  $21.5 \pm 1.0$  °C]

Line Voltage Variation (a.c. V)	*Pole	Frequency [MHz]	Allowed Tolerance for the ISM Band
96 (80 %)	H	Lower : 2 434.3	
	H	Upper : 2 459.3	
	V	Lower : 2 460.9	
	V	Upper : 2 434.0	
108 (90 %)	H	Lower : 2 434.9	
	H	Upper : 2 478.2	
	V	Lower : 2 433.4	
	V	Upper : 2 478.6	
120 (100 %)	H	Lower : 2 480.7	
	H	Upper : 2 433.0	
	V	Lower : 2 432.0	
	V	Upper : 2 478.2	
132 (110 %)	H	Lower : 2 430.1	
	H	Upper : 2 479.1	
	V	Lower : 2 434.6	
	V	Upper : 2 479.1	
150 (125 %)	H	Lower : 2 433.9	
	H	Upper : 2 481.7	
	V	Lower : 2 434.0	
	V	Upper : 2 481.1	

**NOTE :**

1. \*Pol. H = Horizontal V = Vertical
2. Initial load : 1 000 ml of water in the beaker.
3. Line voltage varied from 80 % to 125 %.
4. ISM Frequency : 2 450 MHz, Tolerance :  $\pm 50$  MHz

**RESULT :** Pass



Tested by : Hyunsik Shin

## TEST DATA

### ► Frequency vs Load Variation Test

[Room Temperature :  $21.5 \pm 1.0$  °C]

Volume of water (ml)	*)Pole	Frequency [MHz]	Allowed Tolerance for the ISM Band
200	H	Lower : 2 423.4	
	H	Upper : 2 476.2	
	V	Lower : 2 422.4	
	V	Upper : 2 484.2	
400	H	Lower : 2 415.0	
	H	Upper : 2 493.2	
	V	Lower : 2 431.7	
	V	Upper : 2 477.5	
600	H	Lower : 2 425.3	Lower : 2 400 MHz Upper : 2 500 MHz
	H	Upper : 2 483.0	
	V	Lower : 2 436.2	
	V	Upper : 2 477.5	
800	H	Lower : 2 429.1	
	H	Upper : 2 477.5	
	V	Lower : 2 433.7	
	V	Upper : 2 482.1	
1000	H	Lower : 2 428.1	
	H	Upper : 2 481.4	
	V	Lower : 2 423.3	
	V	Upper : 2 483.6	

**NOTE :**

1. \*Pol. H = Horizontal, V = Vertical
2. The water load was varied between 200 ml to 1 000 ml.
3. Frequency was measured by using nominal voltage (a.c. 120 V).
4. ISM Frequency : 2 450 MHz, Tolerance :  $\pm 50$  MHz

**RESULT :** Pass



Tested by : **Hyunsik Shin**

# TEST DATA

## Conducted Emissions

FCC ID : C5F7NF1HMO950N

[Room Temperature :  $21.5 \pm 1.0$  °C]

EMI Auto Test(11)

1 / 2


## Test Report

### Common Information

Test Description: Conducted emission (NK-19-E-0895)  
Test Site: 3rd building shielded room  
Test Standard: FCC PART 18 Class B  
Environment Conditions: a.c. 120 V, 60 Hz  
Operator Name: hyunsik shin  
Mode: Microwave

### 2.EMI Auto Test\_4-Line Voltage LISN

2.EMI Auto Test\_4-Line Voltage LISN

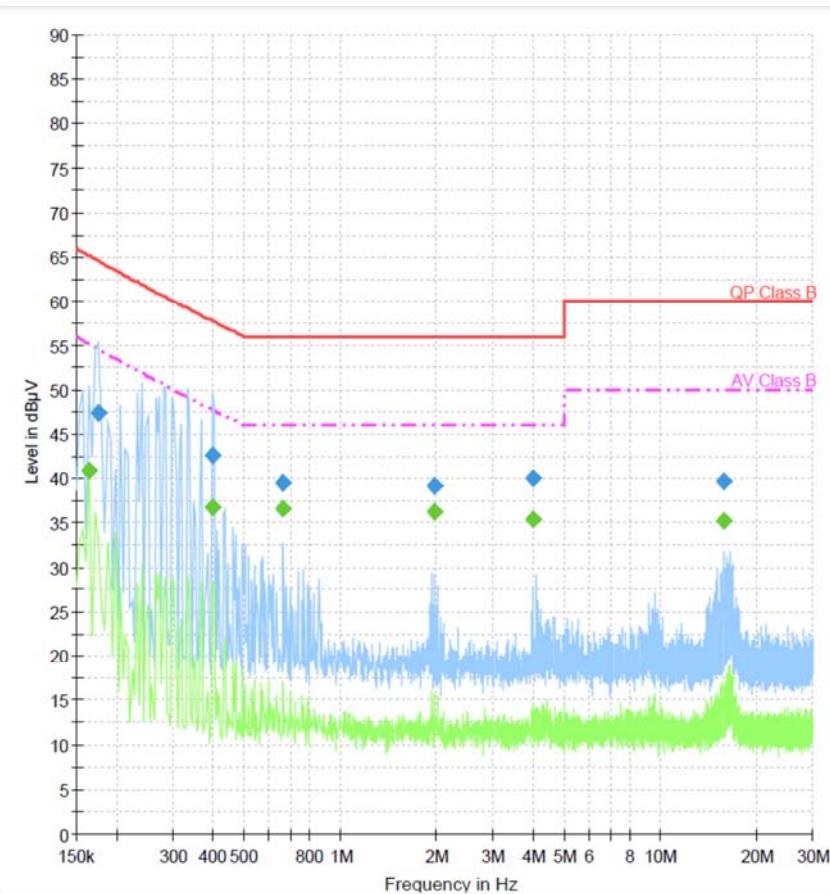

11/15/2019

EMI Auto Test(11)

2 / 2

**Final Result 1**

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.176119	47.4	15000.0	9.000	GND	N	10.7	17.1	64.6	
0.399994	42.6	15000.0	9.000	GND	L1	10.7	15.1	57.7	
0.664912	39.6	15000.0	9.000	GND	L1	10.7	16.4	56.0	
1.970850	39.2	15000.0	9.000	GND	L1	10.7	16.8	56.0	
4.019306	40.0	15000.0	9.000	GND	N	10.8	16.0	56.0	
15.839906	39.7	15000.0	9.000	GND	N	10.9	20.3	60.0	

**Final Result 2**

Frequency (MHz)	CAverage (dB $\mu$ V)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.164925	40.8	15000.0	9.000	GND	L1	10.7	14.3	55.1	
0.399994	36.9	15000.0	9.000	GND	N	10.7	10.8	47.7	
0.664912	36.6	15000.0	9.000	GND	L1	10.7	9.4	46.0	
1.970850	36.3	15000.0	9.000	GND	N	10.8	9.7	46.0	
4.019306	35.4	15000.0	9.000	GND	N	10.8	10.6	46.0	
15.839906	35.2	15000.0	9.000	GND	L1	10.8	14.8	50.0	

11/15/2019

**NOTES:**

1. Measurements using quasi-peak mode & average mode.
2. If no frequencies are specified in the tables, no measurement for quasi-peak or average was necessary.
3. Line : L = Line , N = Neutral
4. The limit for consumer device is on the FCC Part section 18.307(b).



---

*Tested by : Hyunsik Shin*

## TEST DATA

### Radiated Emissions (150 kHz to 30 MHz)

FCC ID : C5F7NF1HMO950N

[Room Temperature :  $19.5 \pm 1.0$  °C]

Test

1 / 2


### Test Report

#### Common Information

Test Description : Radiated Emission(NK-19-E-0895)  
Test Site : 3rd Building 10 m Chamber(3m)  
Test Standard : FCC Part 18  
Environment Conditions : a.c. 120 V, 60 Hz  
Operator Name : hyunsik shin  
Mode : KOT-1H\*\*, KOTR30MXE

#### Full Spectrum

Full Spectrum

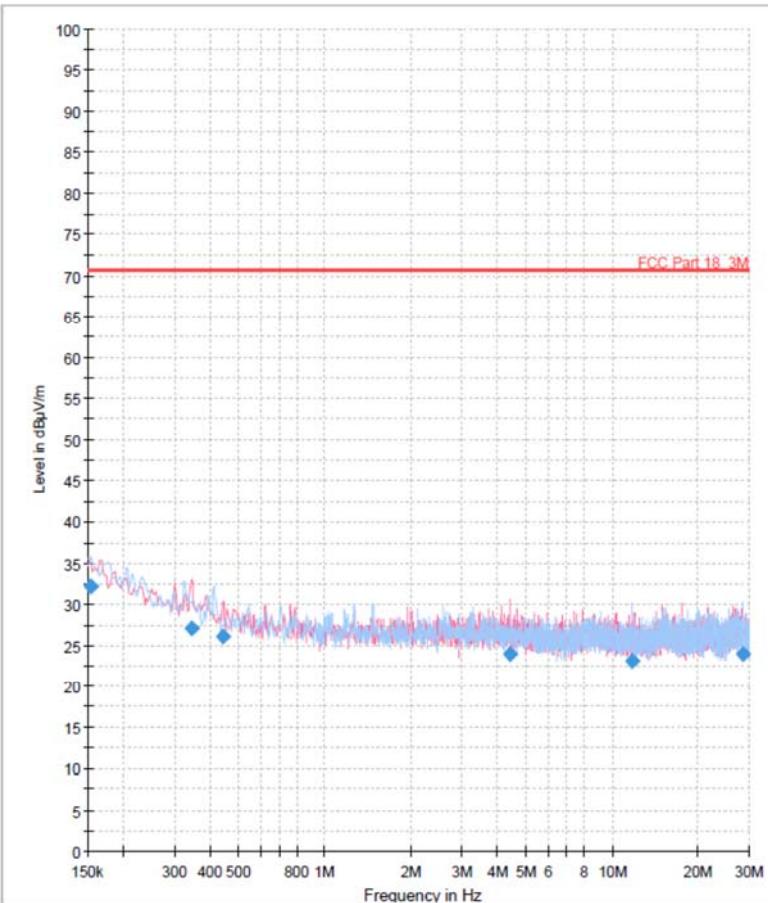

11/12/2019

Test

2 / 2

**Final Result**

Frequency (MHz)	QuasiPeak (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB)
0.152985	32.12	70.60	38.48	15000.0	9.000	H	145.0	-22.5
0.344025	27.02	70.60	43.58	15000.0	9.000	V	30.0	-22.9
0.442530	26.09	70.60	44.51	15000.0	9.000	V	238.0	-23.0
4.415565	23.97	70.60	46.63	15000.0	9.000	V	117.0	-22.4
11.767620	23.08	70.60	47.52	15000.0	9.000	H	311.0	-22.2
28.540335	23.98	70.60	46.62	15000.0	9.000	H	127.0	-20.8

(continuation of the "Final\_Result" table from column 15 ...)

Frequency (MHz)	Comment
0.152985	
0.344025	
0.442530	
4.415565	
11.767620	
28.540335	

11/12/2019

**<Radiated Measurements at 3 meters >**

**NOTES:**

1. \**Pol. H = Horizontal V = Vertical*
2. \*\**AF + CL + Amp. = Antenna Factor + Cable Loss + Amplifier.*
3. *Distance Correction factor : 20 \* log (300 / 3) = 40 dBuV/m*
4. *The limit at 300 meters is 20 \* log (25 \* SQRT (RF Power / 500))*
5. *All other emissions were measured while a 700 m<sup>2</sup> load was placed in the center of the oven.*
6. *The limit for consumer device is on the FCC Part section 18.305.*



---

*Tested by : Hyunsik Shin*

## TEST DATA

### Radiated Emissions (30 MHz to 1 GHz)

FCC ID : C5F7NF1HMO950N

[Room Temperature :  $19.5 \pm 1.0$  °C]

Test

1 / 2


### Test Report

#### Common Information

Test Description : Radiated Emission(NK-19-E-0895)  
Test Site : 3rd Building 10 m Chamber  
Test Standard : FCC Part 18  
Environment Conditions : a.c. 120 V, 60 Hz  
Operator Name : hyunsik shin  
Model : KOT-1H\*\*, KOTR30MXE

#### Full Spectrum

Full Spectrum

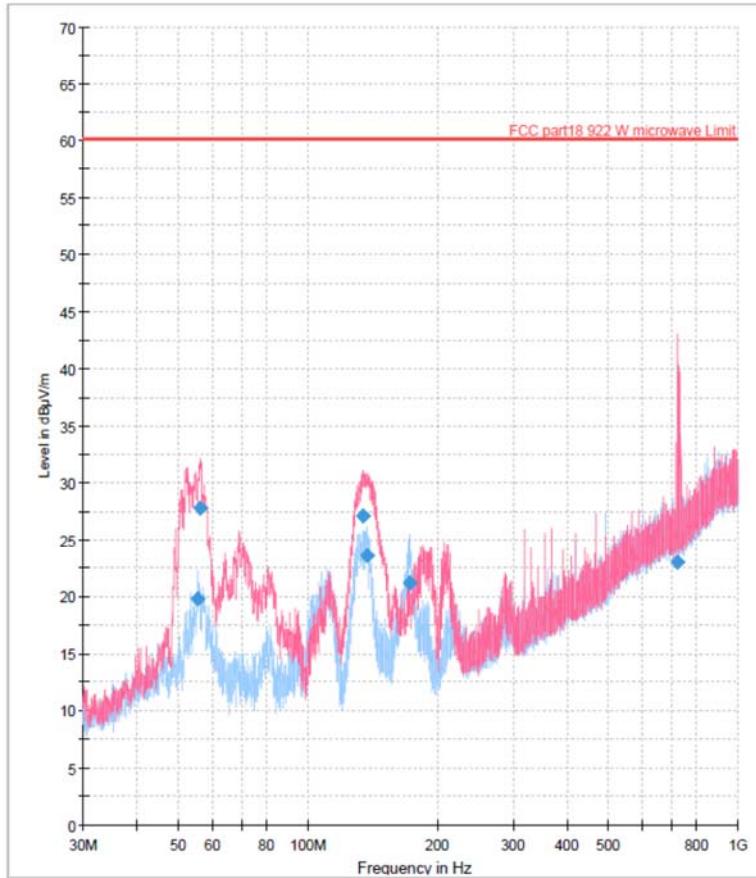

11/12/2019

Test

2 / 2

**Final Result**

Frequency (MHz)	QuasiPeak (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
55.446333	19.83	60.16	40.33	15000.0	120.000	400.0	H	334.0	-21.6
56.287000	27.78	60.16	32.38	15000.0	120.000	205.0	V	244.0	-21.8
134.727667	27.10	60.16	33.06	15000.0	120.000	107.0	V	129.0	-25.1
136.764667	23.55	60.16	36.61	15000.0	120.000	400.0	H	121.0	-25.1
172.363667	21.16	60.16	39.00	15000.0	120.000	400.0	H	346.0	-23.5
725.166667	23.04	60.16	37.12	15000.0	120.000	192.0	V	295.0	-5.6

(continuation of the "Final\_Result" table from column 16 ...)

Frequency (MHz)	Comment
55.446333	
56.287000	
134.727667	
136.764667	
172.363667	
725.166667	

11/12/2019

**<Radiated Measurements at 10 meters>**

**NOTES:**

1. \**Pol. H = Horizontal V = Vertical*
2. \*\**AF + CL + Amp. = Antenna Factor + Cable Loss + Amplifier.*
3. *Distance Correction factor : 20 \* log (300/10) = 29.5 dB  $\mu$ N/m*
4. *The limit at 300 meters is 20 \* log (25 \* SQRT (RF Power/500))*
5. *All other emissions were measured while a 700 m $\Omega$  load was placed in the center of the oven.*
6. *The limit for consumer device is on the FCC Part section 18.305.*



---

*Tested by : Hyunsik Shin*

# TEST DATA

## Radiated Emissions (Above 1 GHz)

FCC ID : C5F7NF1HMO950N

[Room Temperature :  $21.5 \pm 1.0$  °C]

Frequency (MHz)	Pol* (H/V)	Antenna Heights (cm)	Turntable Angles (°)	Reading Level (dB $\mu$ V)	Total Loss** (dB)	Result at 3 m		K	Results at 300 m ( $\mu$ V/m)	Limits at 300 m ( $\mu$ V/m)
						(dB $\mu$ V/m)	( $\mu$ V/m)			
2398	H	199.7	308	45.91	-9.9	36.01	63.17	0.0070	0.44	30.62
4918	V	199.8	281	36.19	-1.4	34.79	54.89	0.0100	0.55	30.62
4919	H	100	353	36.28	-1.5	34.78	54.83	0.0100	0.55	30.62
7365	V	300.1	-12	33.19	2.4	35.59	60.19	0.0100	0.60	30.62
7429	H	399.7	62	29.17	2.6	31.77	38.77	0.0100	0.39	30.62
9686	V	99.8	36	26.12	5.6	31.72	38.55	0.0100	0.39	30.62
9836	H	100	286	25.88	5.6	31.48	37.50	0.0100	0.37	30.62
12274	V	199.8	8	24.59	7.4	31.99	39.76	0.0100	0.40	30.62
12282	H	199.7	-13	26.73	7.4	34.13	50.87	0.0100	0.51	30.62
14713	H	199.7	86	22.60	12.5	35.1	56.89	0.0100	0.57	30.62
14725	V	199.8	340	22.93	12.2	35.13	57.08	0.0100	0.57	30.62
17177	H	199.7	22	6.92	16.2	23.12	14.32	0.0100	0.14	30.62
17292	V	399.7	-10	4.51	25.8	30.31	32.77	0.0100	0.33	30.62
17301	H	100	198	3.52	27.3	30.82	34.75	0.0100	0.35	30.62
17305	V	199.8	239	4.66	27	31.66	38.28	0.0100	0.38	30.62
17499	H	300.2	91	-0.09	28.9	28.81	27.57	0.0100	0.28	30.62
17501	V	300.1	212	0.25	29	29.25	29.01	0.0100	0.29	30.62
17624	H	199.7	34	3.71	25.2	28.91	27.89	0.0100	0.28	30.62
17635	V	99.8	134	3.43	25.5	28.93	27.96	0.0100	0.28	30.62

<Radiated Measurements at 3 meters>

### NOTES:


1. \* Pol. H =Horizontal V=Vertical
2. \*\* Total Loss = Antenna Factor + Cables Loss + Amplifier + HPF (High Pass Filter)
3. Field Strength (at 300 m) ( $\mu$ V/m) =  $K * 10^{[Fieldstrength at 3 m (dB $\mu$ V/m) / 20]}$
4. The limit at 300 meters is  $25 * \sqrt{RF Power/500}$
5. Load for measurement of radiation on second and third harmonic : Two loads, one of 700 ml and the other of 300 ml, of water were used. Each load was tested both with the beaker located in the center of the oven and with it in the corner.
6. The test was performed at peak detector mode with average.
7. The limit for consumer device is on the FCC Part section 18.305.



Tested by : Hyunsik Shin

## PLOTS OF EMISSIONS


- Frequency vs Line Voltage Variation Test

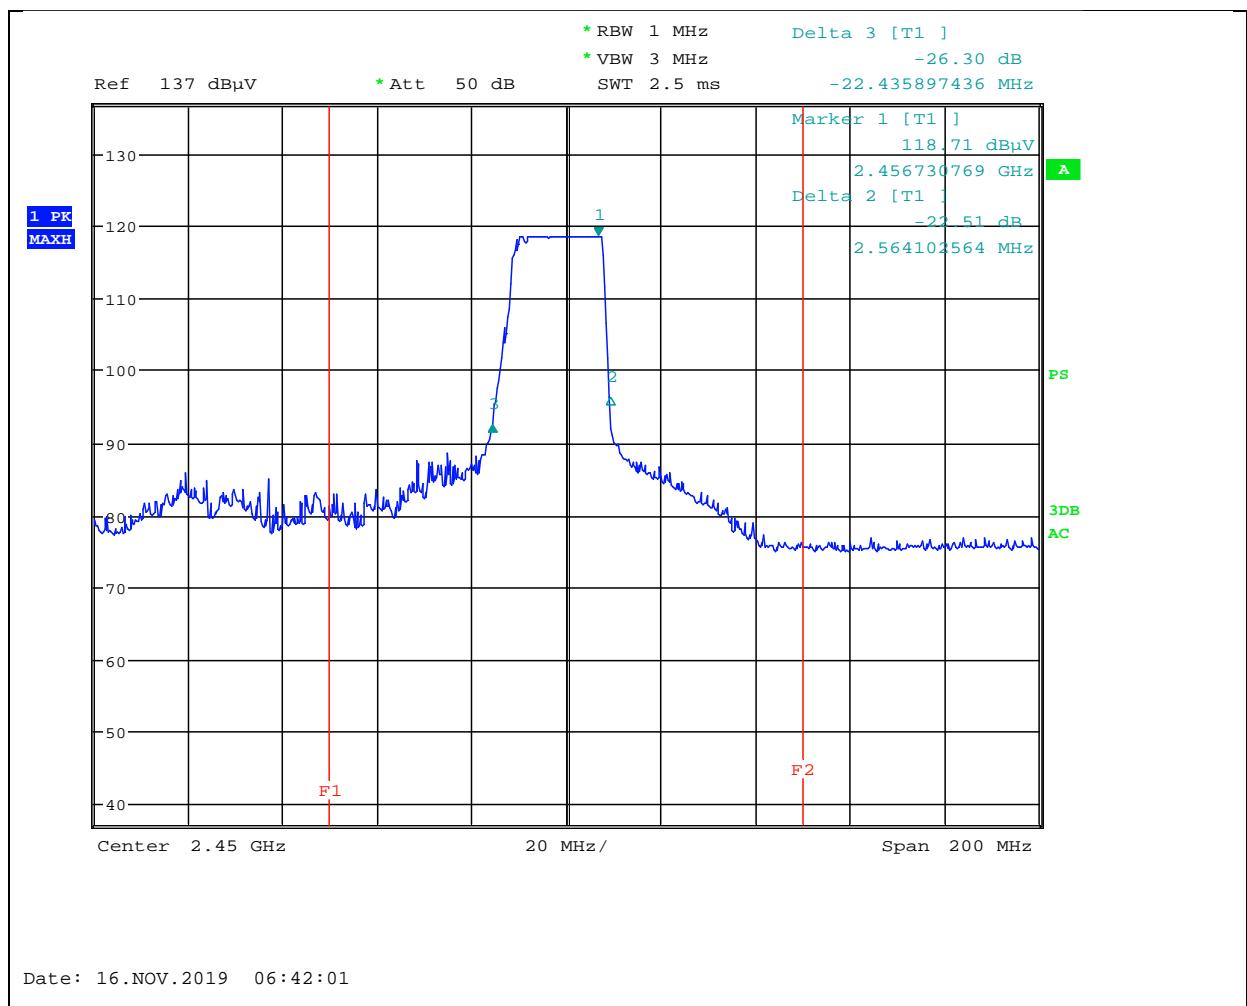

Horizontal (96 V, 1000 m $\ell$ )

## PLOTS OF EMISSIONS


- Frequency vs Line Voltage Variation Test

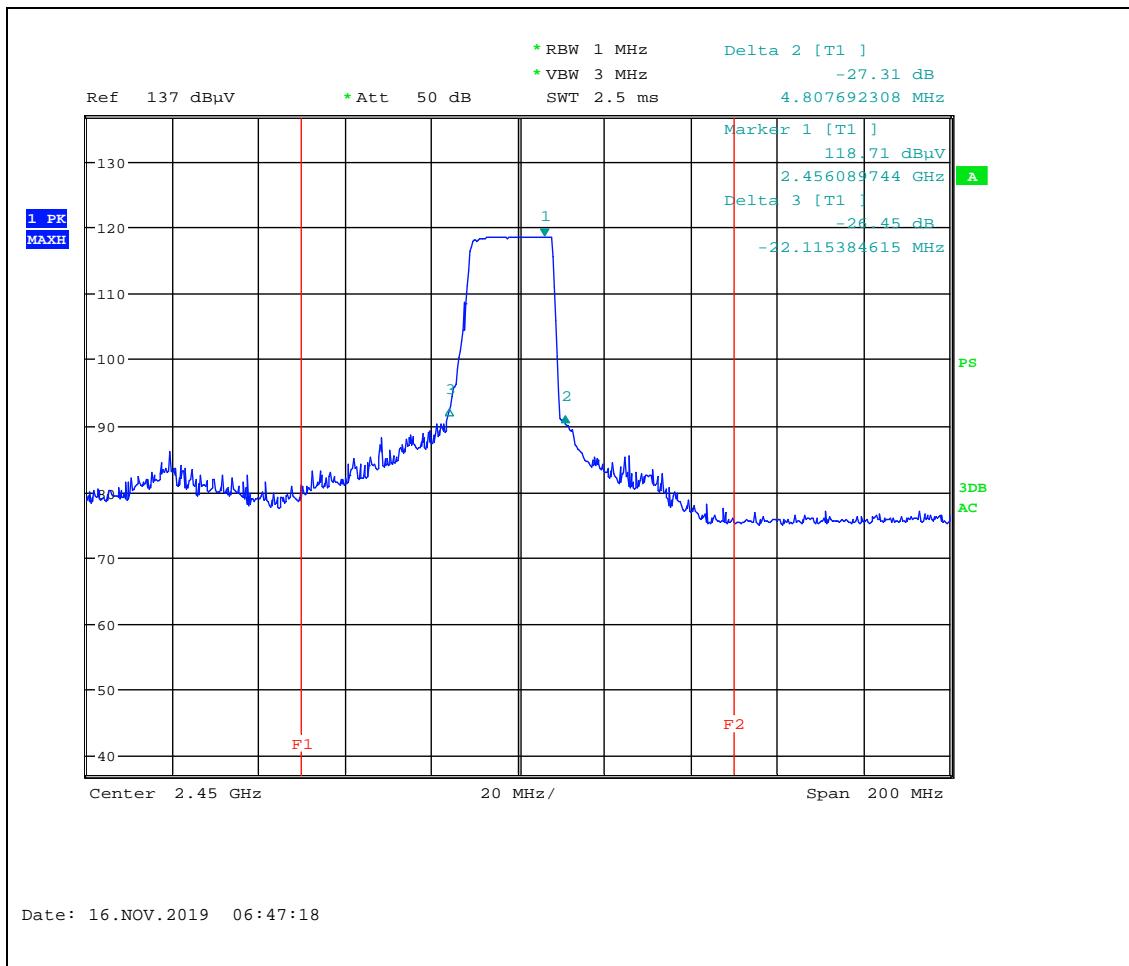

Vertical (96 V, 1000 m $\ell$ )

## PLOTS OF EMISSIONS


- Frequency vs Line Voltage Variation Test

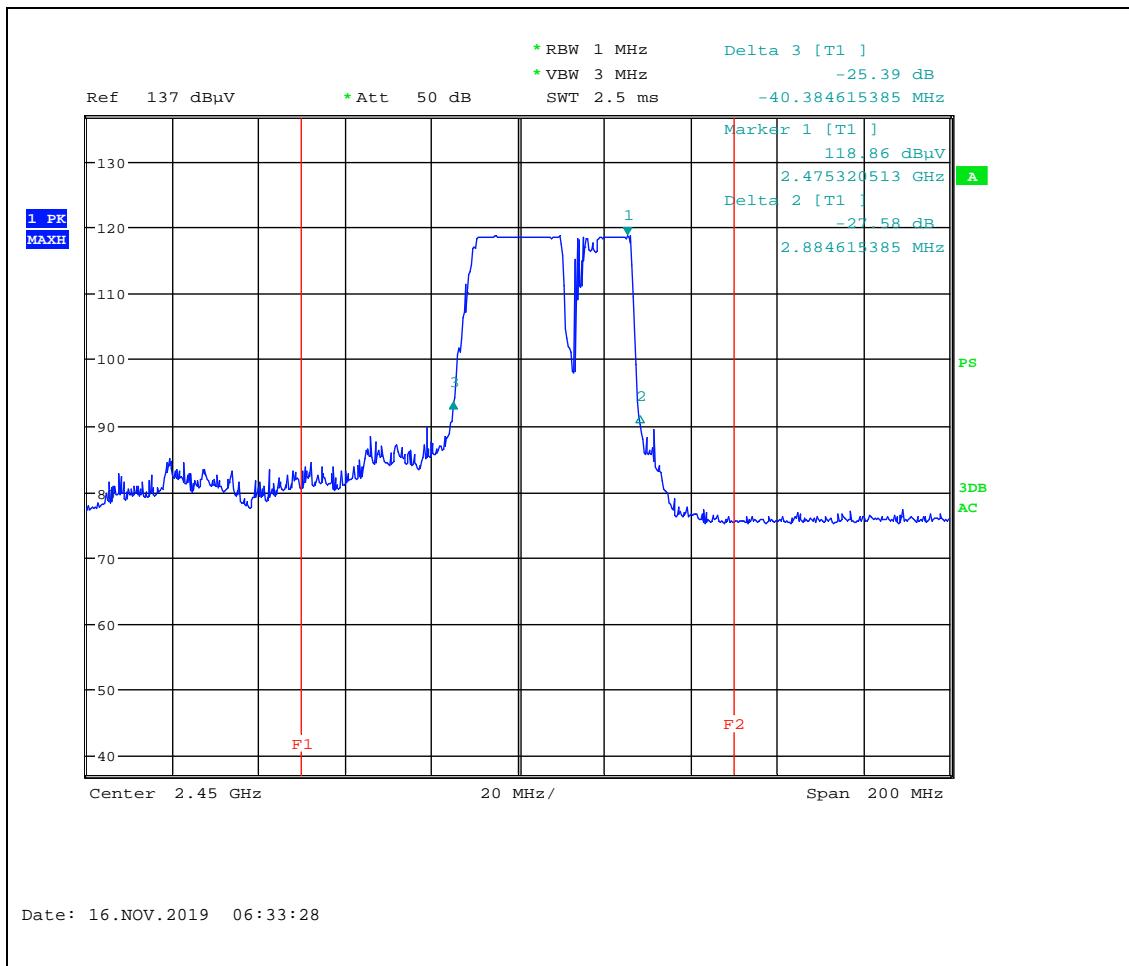

Horizontal (108 V, 1000 ms)

## PLOTS OF EMISSIONS


- Frequency vs Line Voltage Variation Test

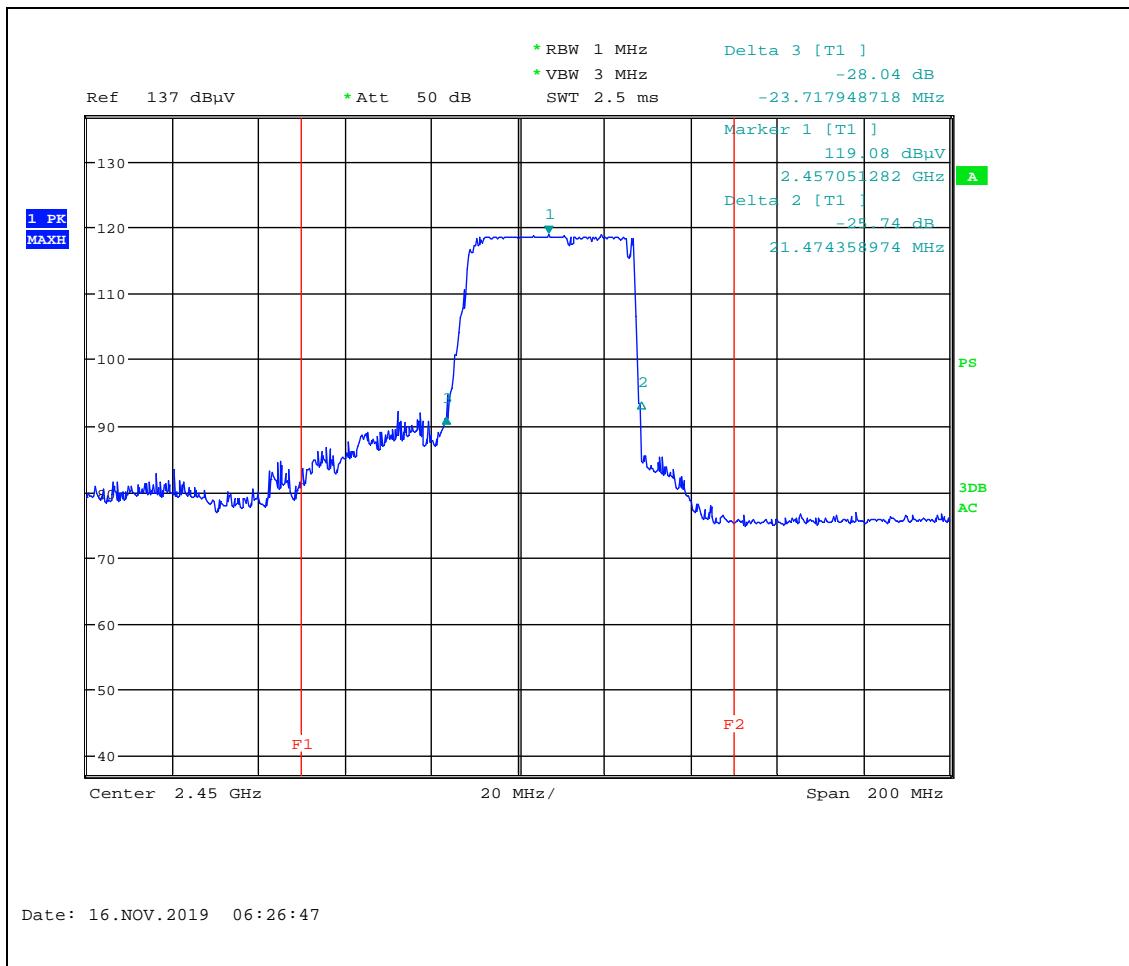

Vertical (108 V, 1000 m $\ell$ )

## PLOTS OF EMISSIONS


- Frequency vs Line Voltage Variation Test

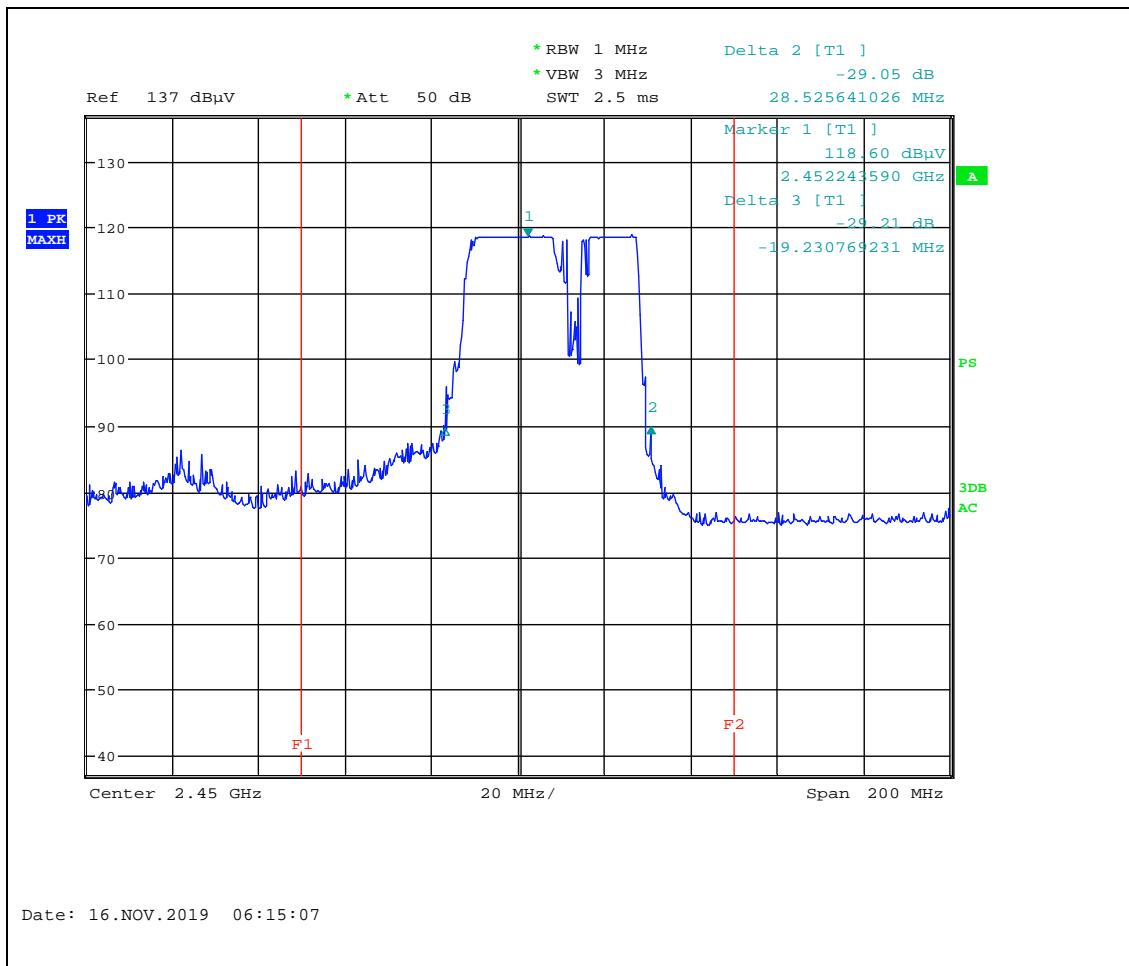

Horizontal (120 V, 1000 m $\ell$ )

## PLOTS OF EMISSIONS


- Frequency vs Line Voltage Variation Test

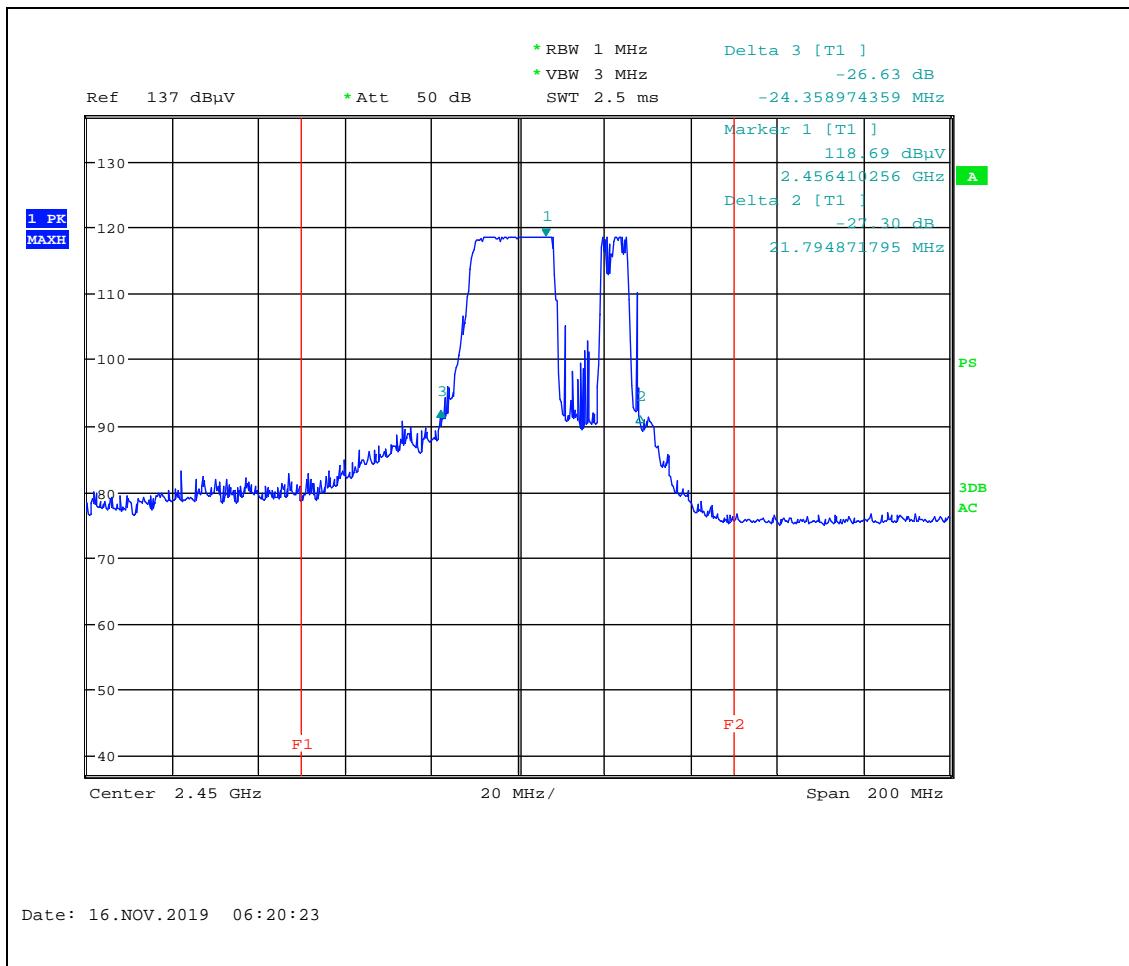

Vertical (120 V, 1000 mV)

## PLOTS OF EMISSIONS


- Frequency vs Line Voltage Variation Test

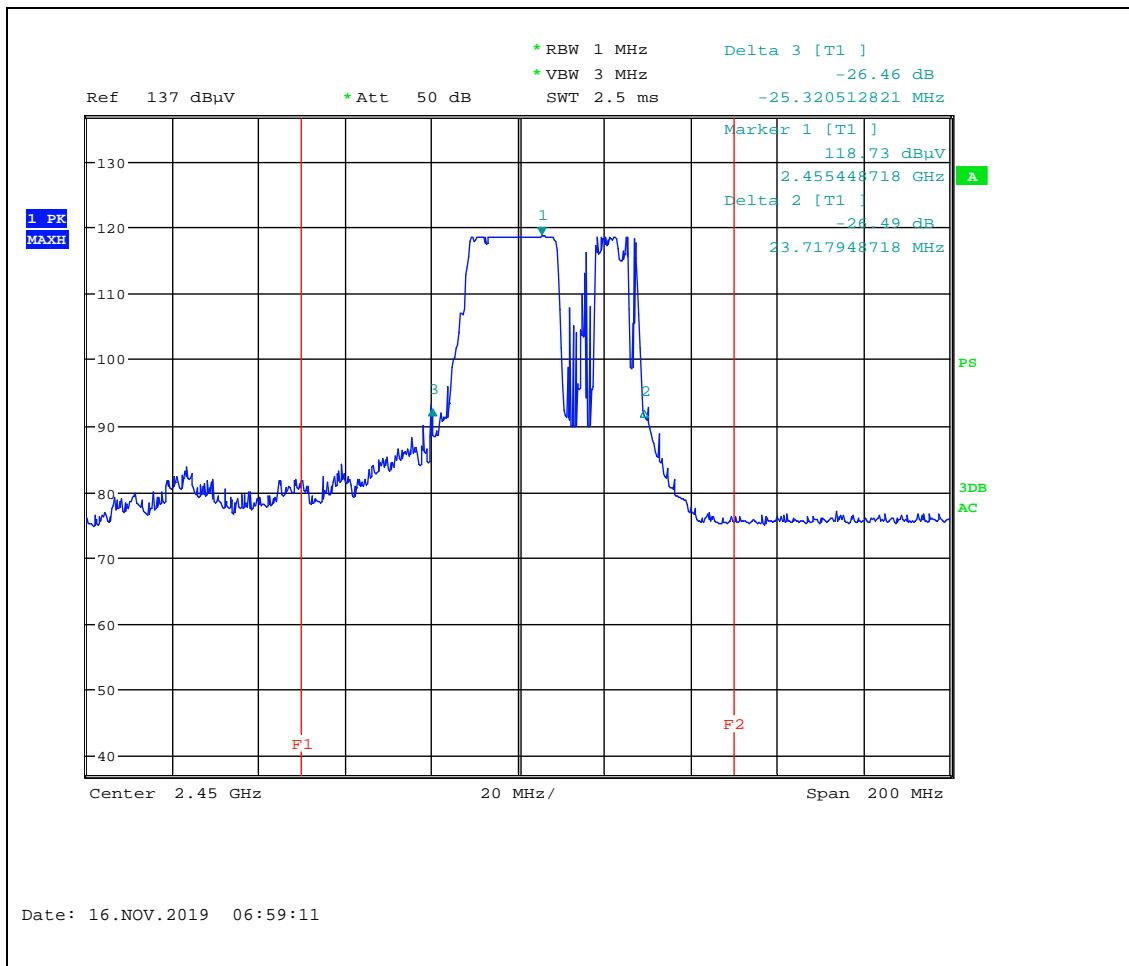

Horizontal (132 V, 1000 ms)

## PLOTS OF EMISSIONS


- Frequency vs Line Voltage Variation Test

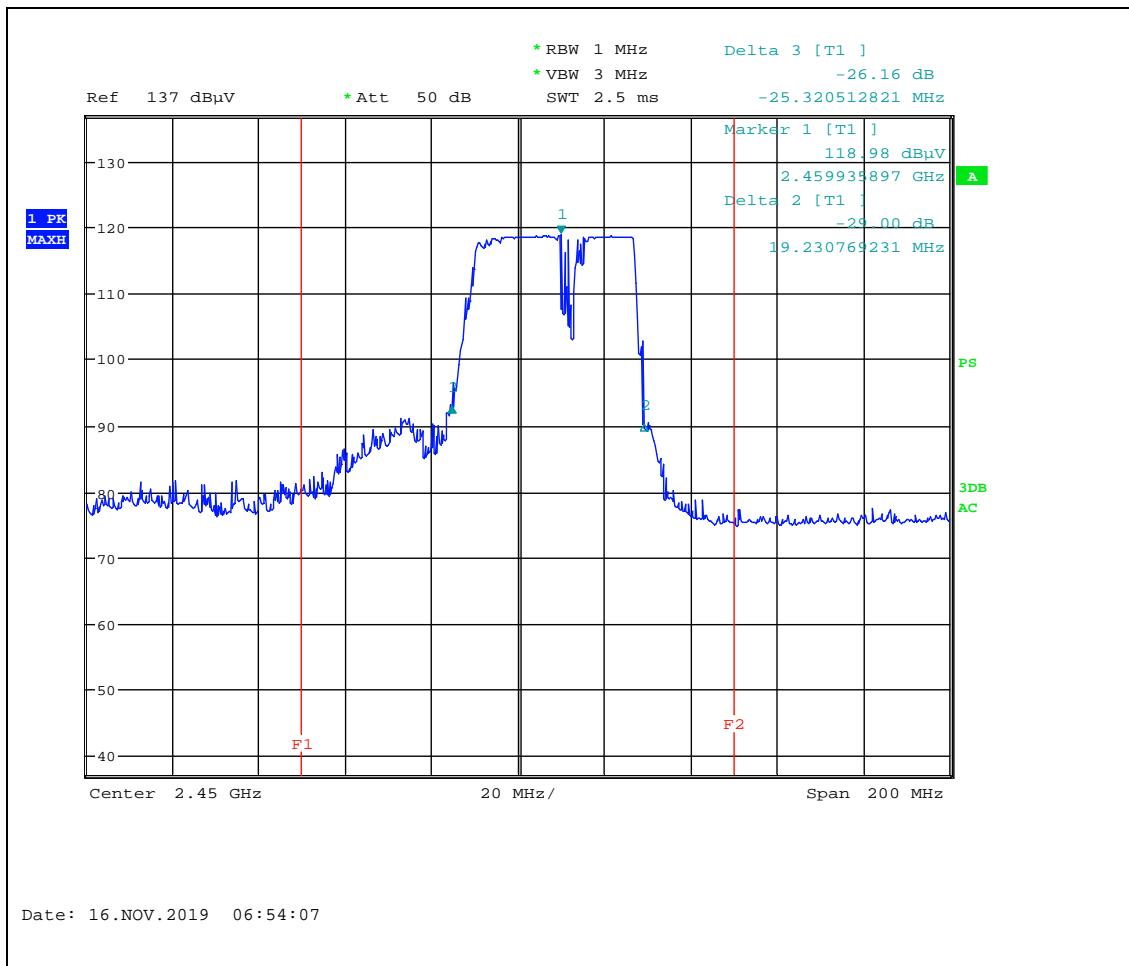

Vertical (132 V, 1000 m $\ell$ )

## PLOTS OF EMISSIONS


- Frequency vs Line Voltage Variation Test

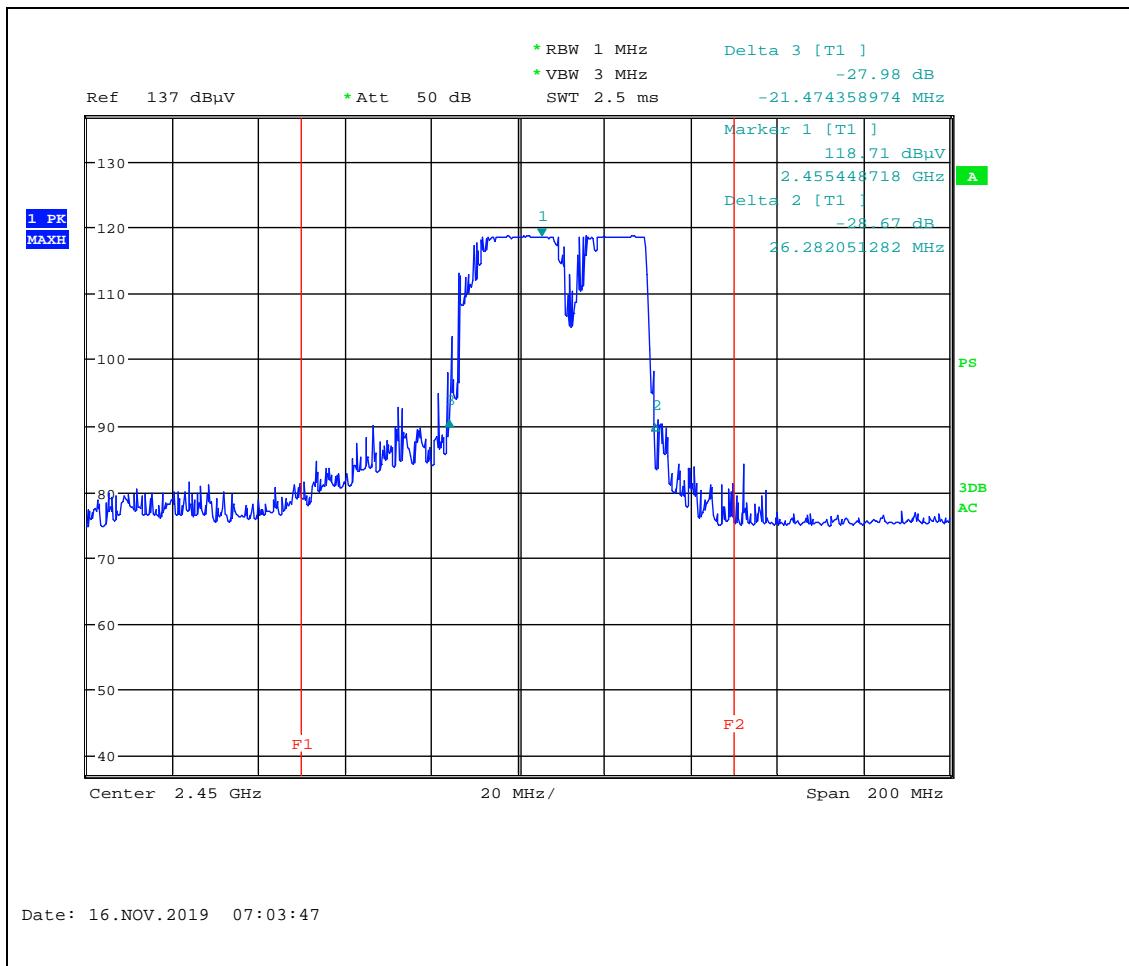

Horizontal (150 V, 1000 ms)

## PLOTS OF EMISSIONS


- Frequency vs Line Voltage Variation Test

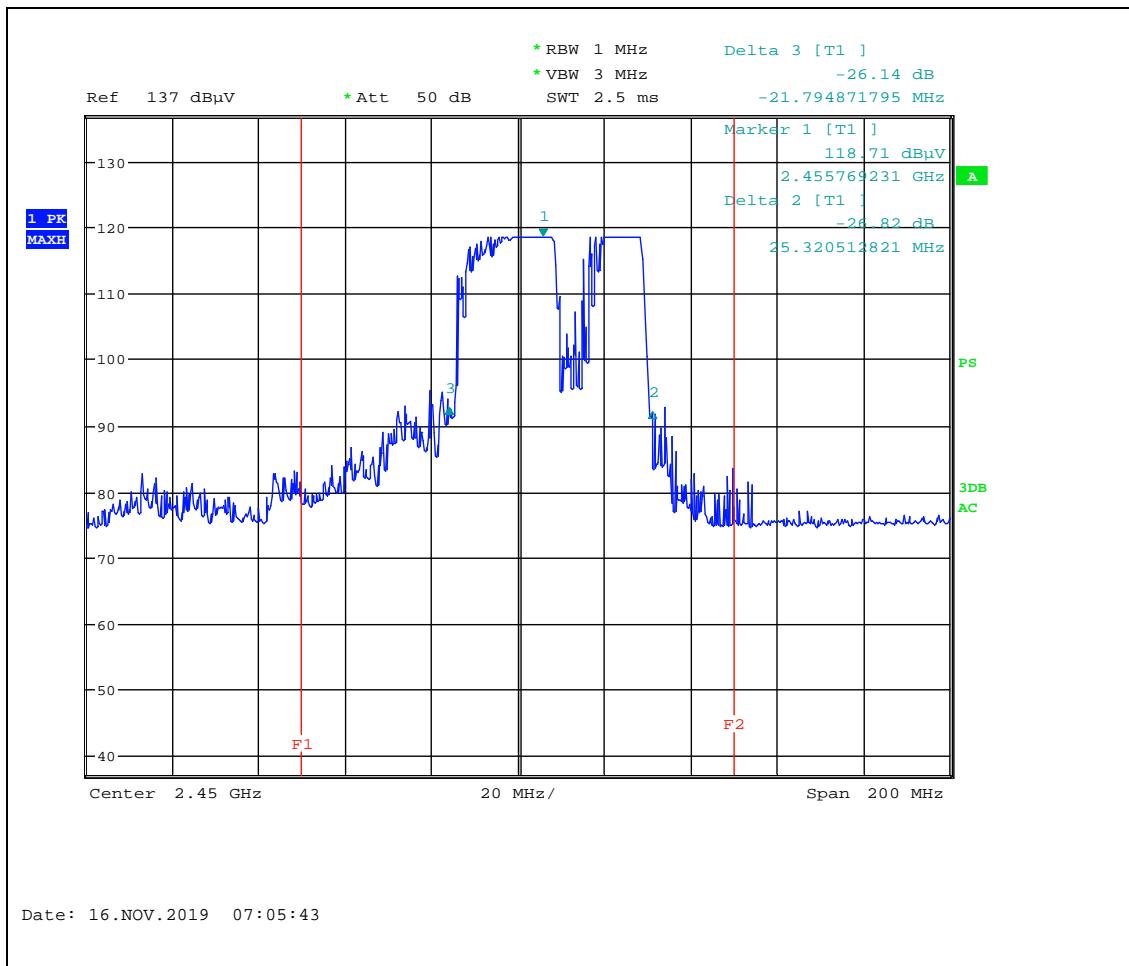

Vertical (150 V, 1000 m $\ell$ )

## PLOTS OF EMISSIONS


- Frequency vs Load Variation Test

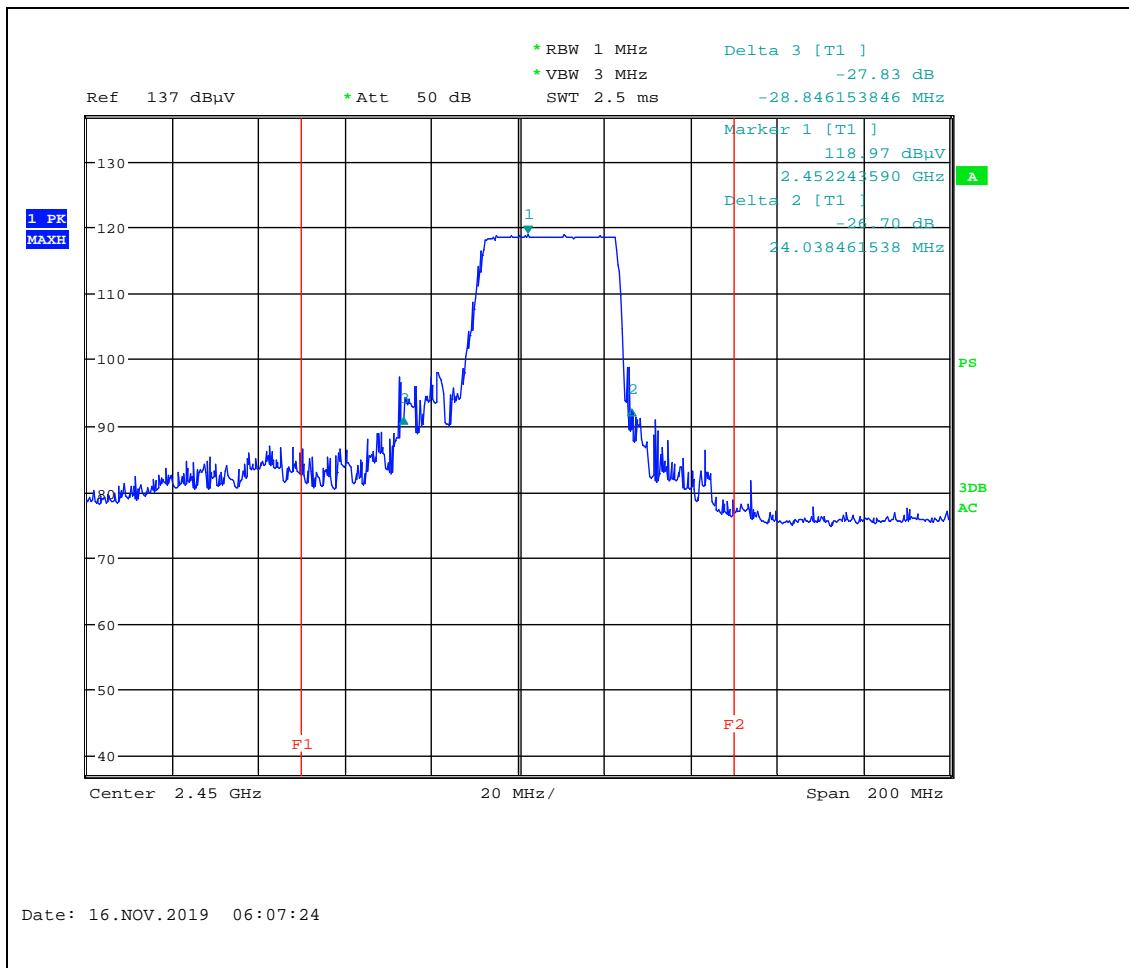

Horizontal (120 V, 200 m $\ell$ )

## PLOTS OF EMISSIONS


- Frequency vs Load Variation Test

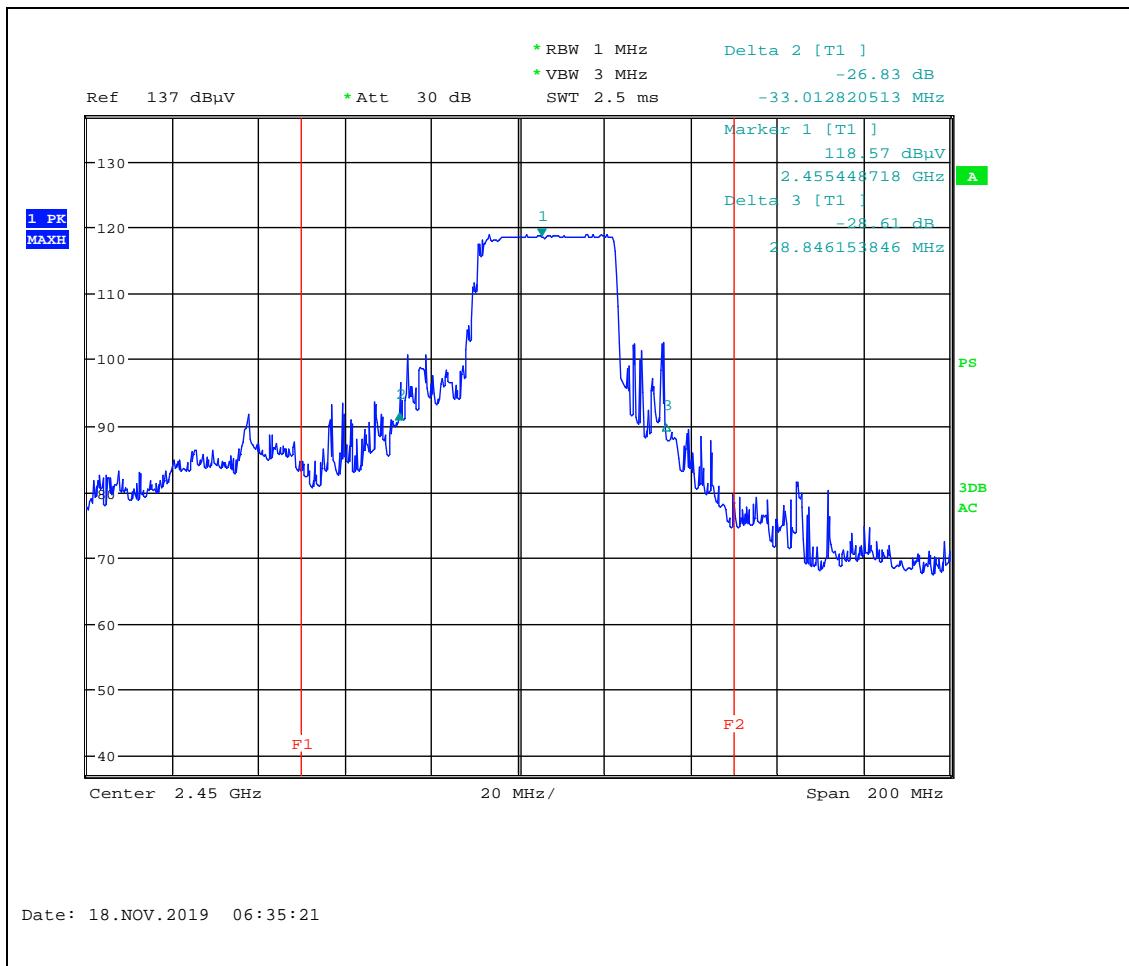

Vertical (120 V, 200 m $\ell$ )

## PLOTS OF EMISSIONS


- Frequency vs Load Variation Test

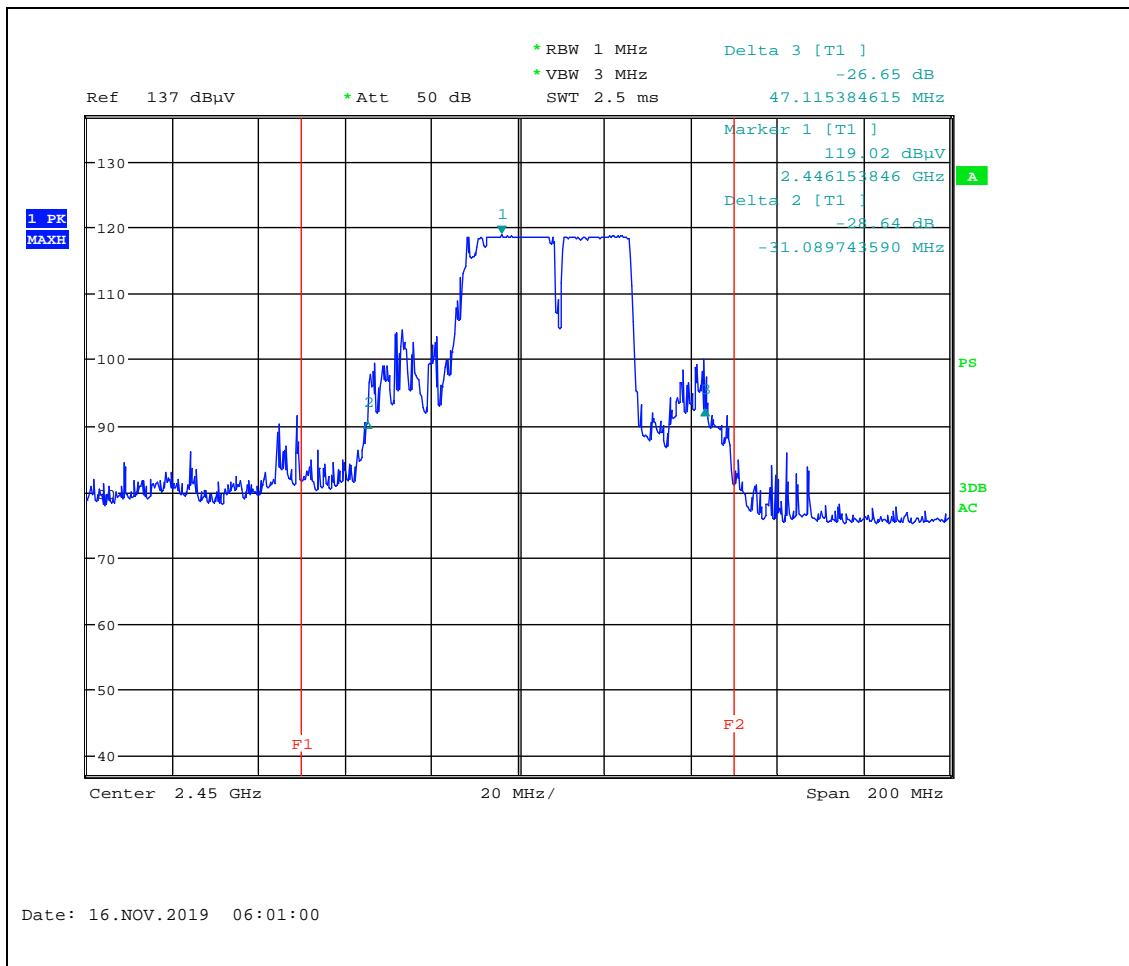

Horizontal (120 V, 400 m $\ell$ )

## PLOTS OF EMISSIONS


- Frequency vs Load Variation Test

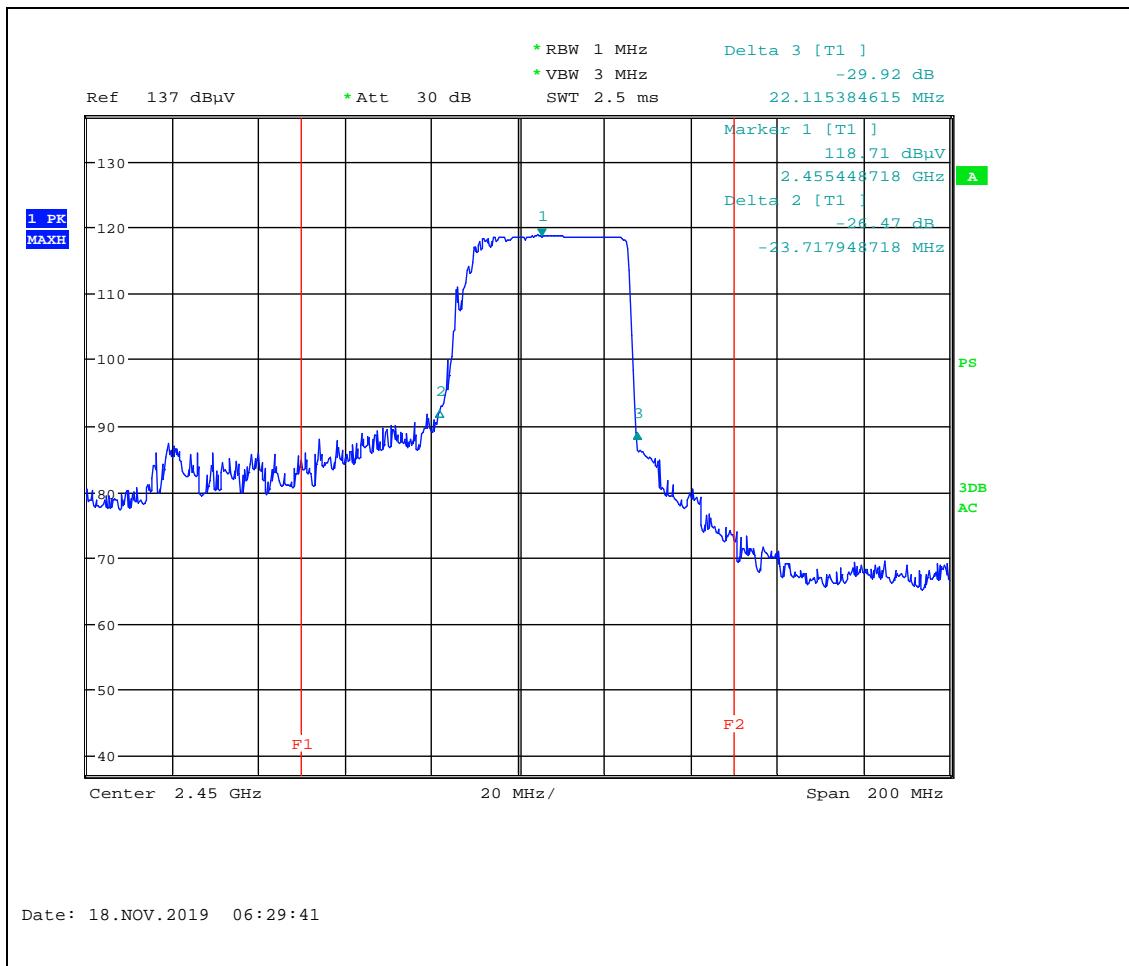

Vertical (120 V, 400 mA)

## PLOTS OF EMISSIONS


- Frequency vs Load Variation Test

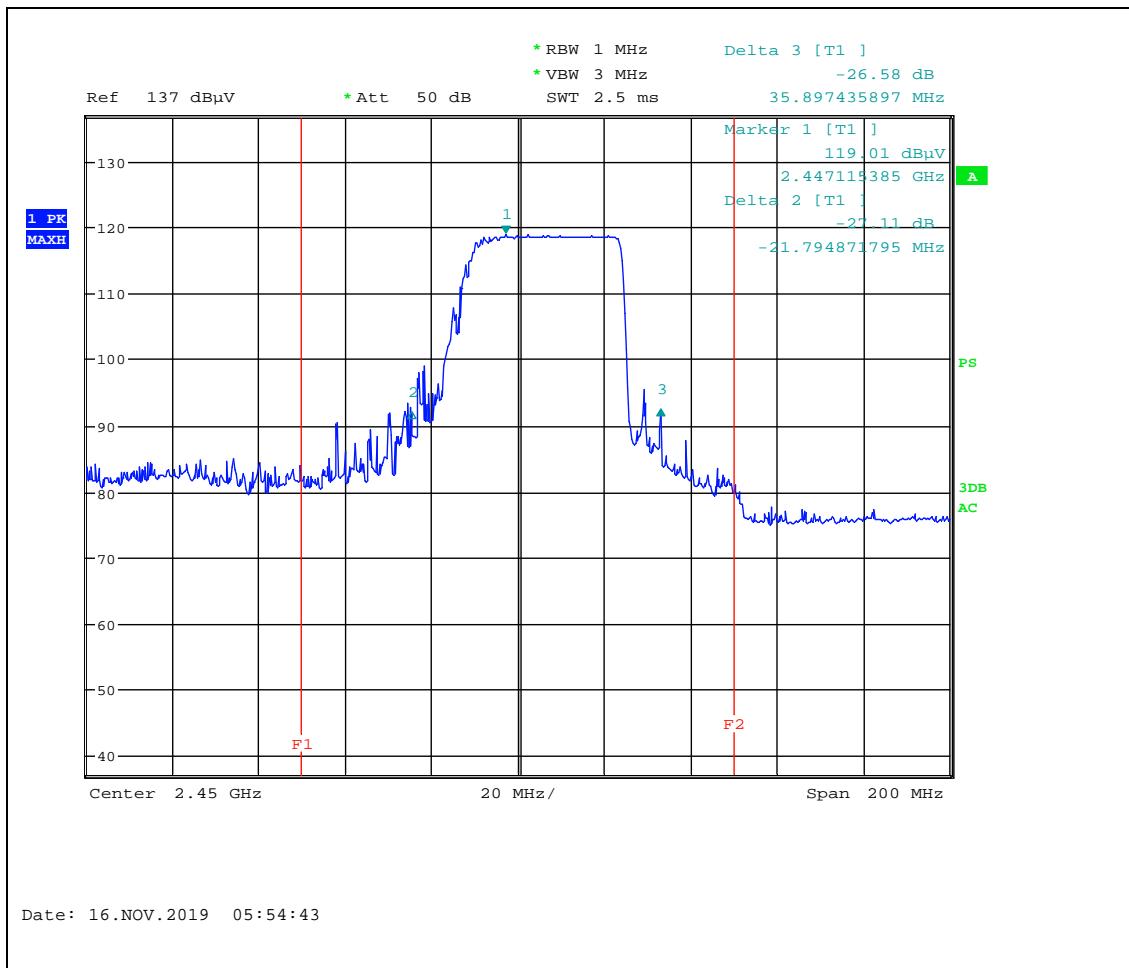

Horizontal (120 V, 600 m $\ell$ )

## PLOTS OF EMISSIONS


- Frequency vs Load Variation Test

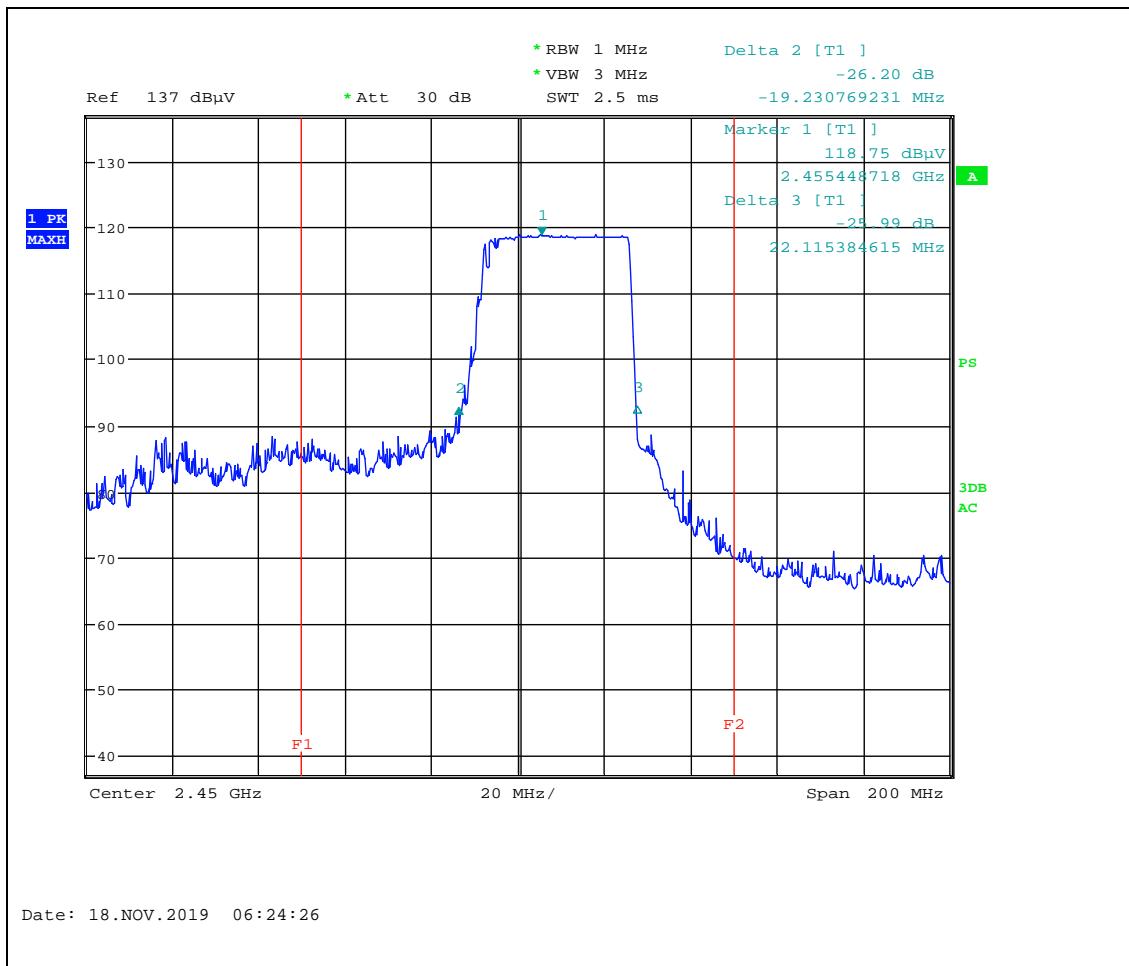

Vertical (120 V, 600 m $\ell$ )

## ***PLOTS OF EMISSIONS***


- ***Frequency vs Load Variation Test***

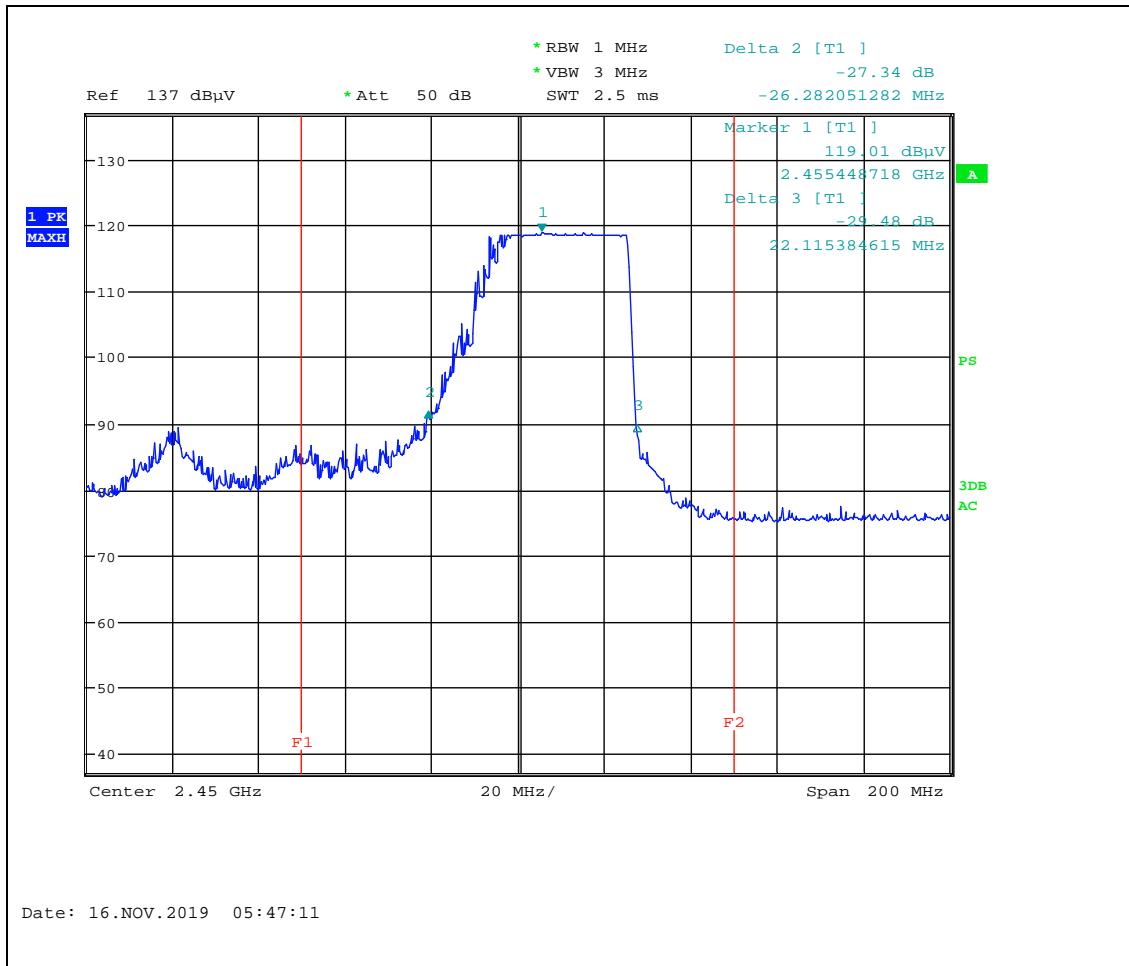

### Horizontal (120 V, 800 ml)

## PLOTS OF EMISSIONS


- Frequency vs Load Variation Test

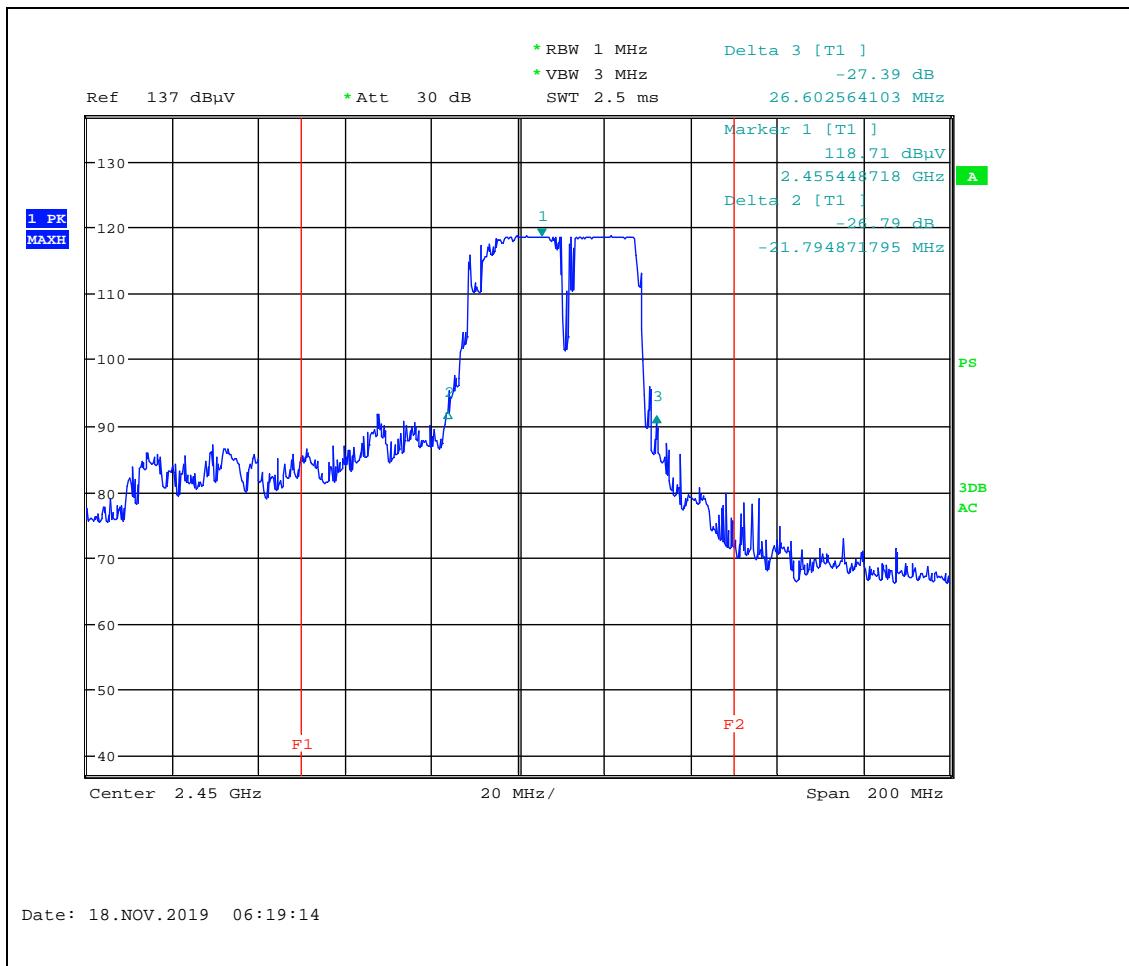

Vertical (120 V, 800 mA)

## PLOTS OF EMISSIONS


- Frequency vs Load Variation Test

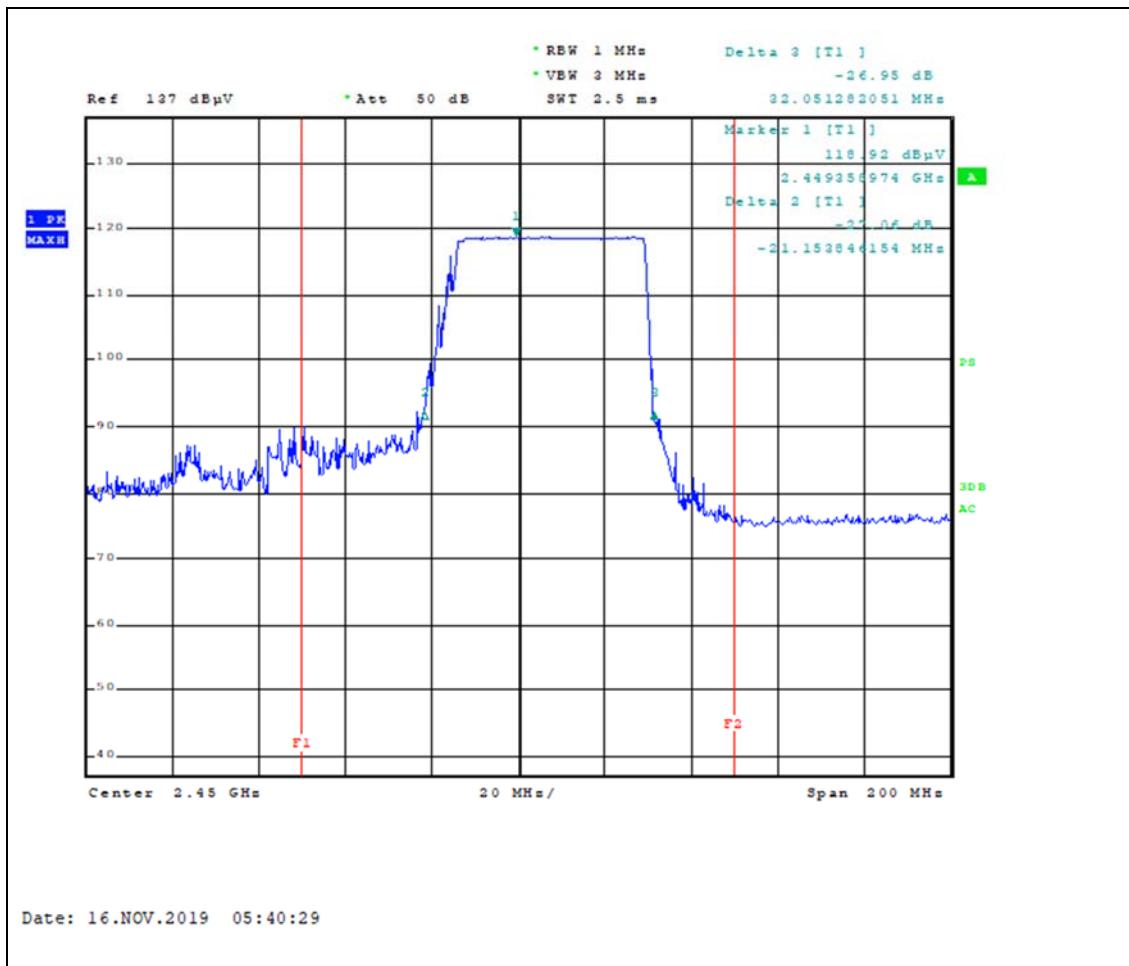

Horizontal (120 V, 1000 m $\ell$ )

## PLOTS OF EMISSIONS


- Frequency vs Load Variation Test

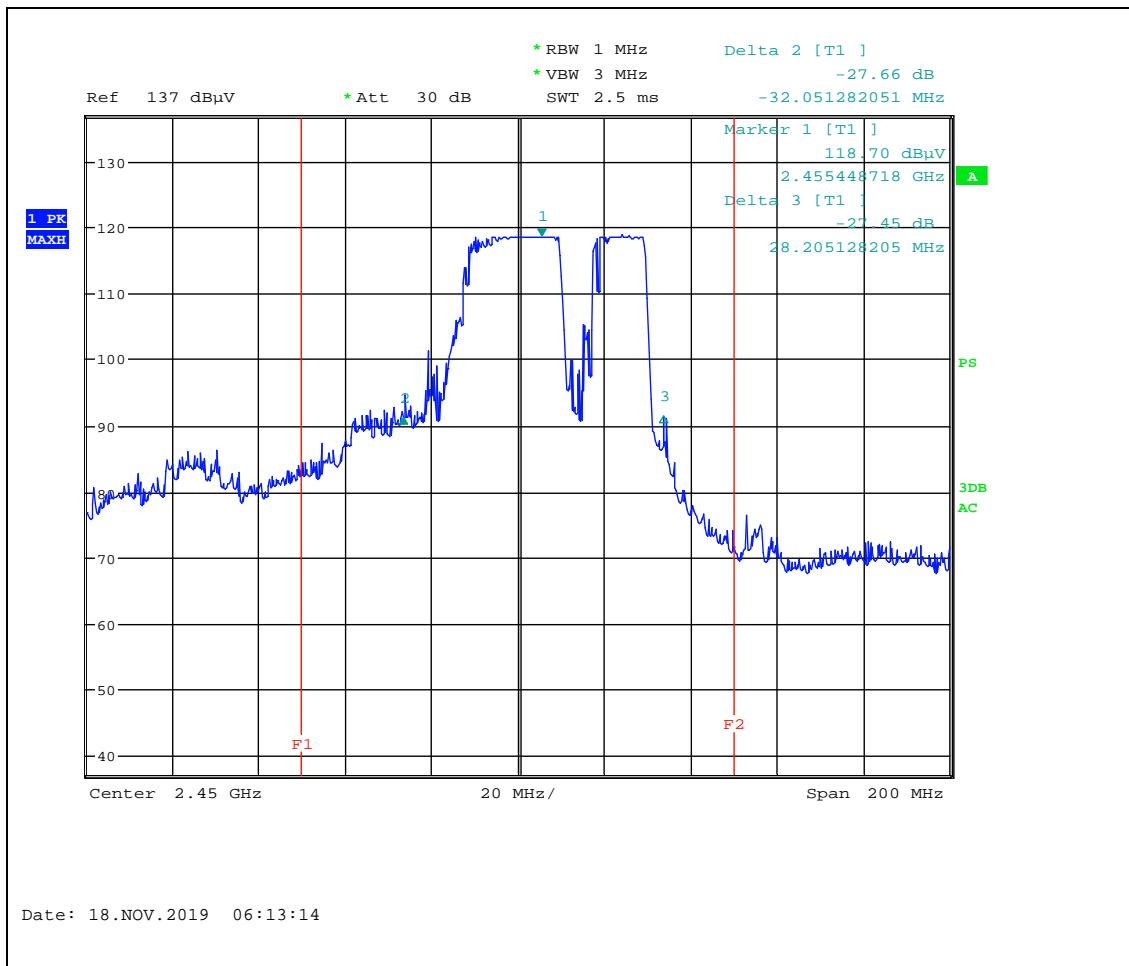

Vertical (120 V, 1000 m $\ell$ )

## PLOTS OF EMISSIONS


- Radiated Emissions (Above 1 GHz)**

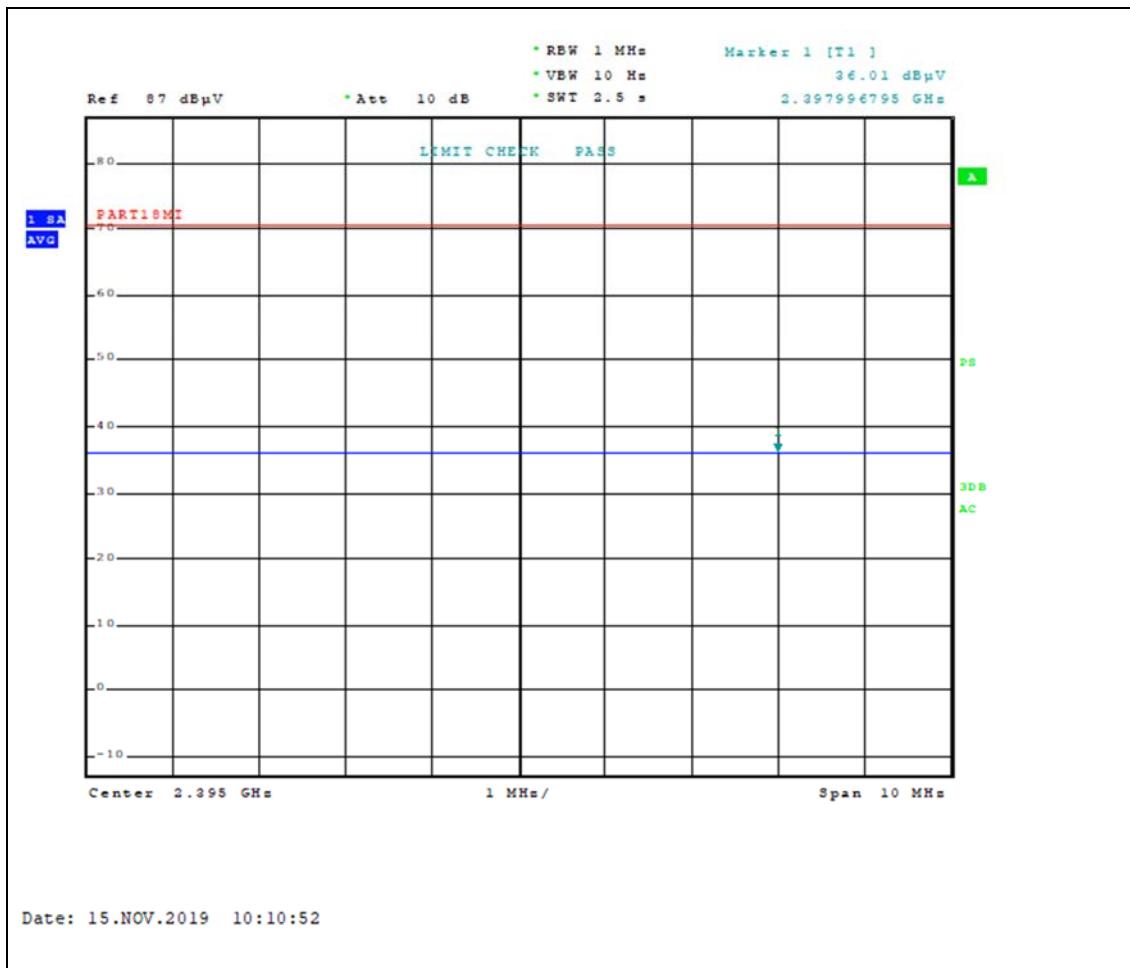

**2397.99 MHz**

## PLOTS OF EMISSIONS


- **Radiated Emissions (Above 1 GHz)**

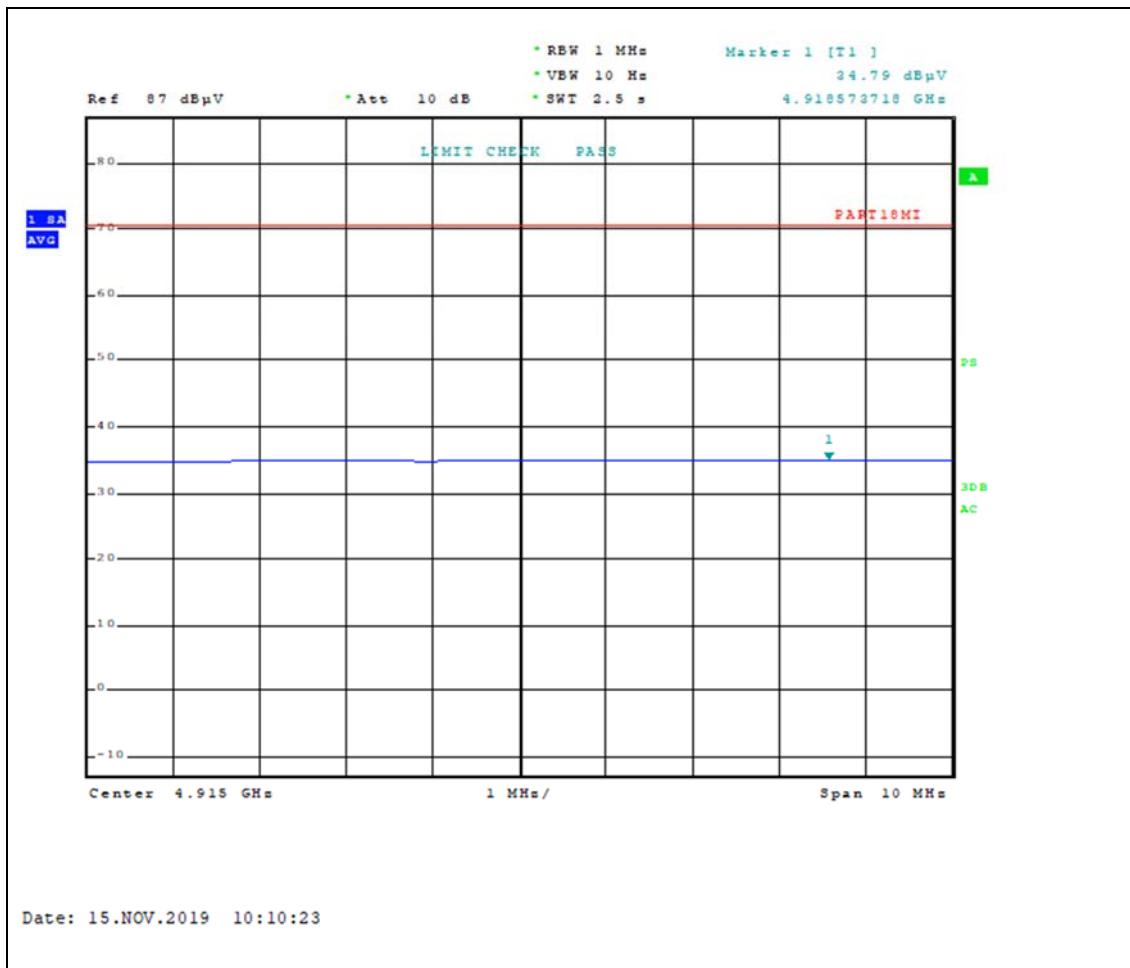

**4918.57 MHz**

## PLOTS OF EMISSIONS


- Radiated Emissions (Above 1 GHz)**

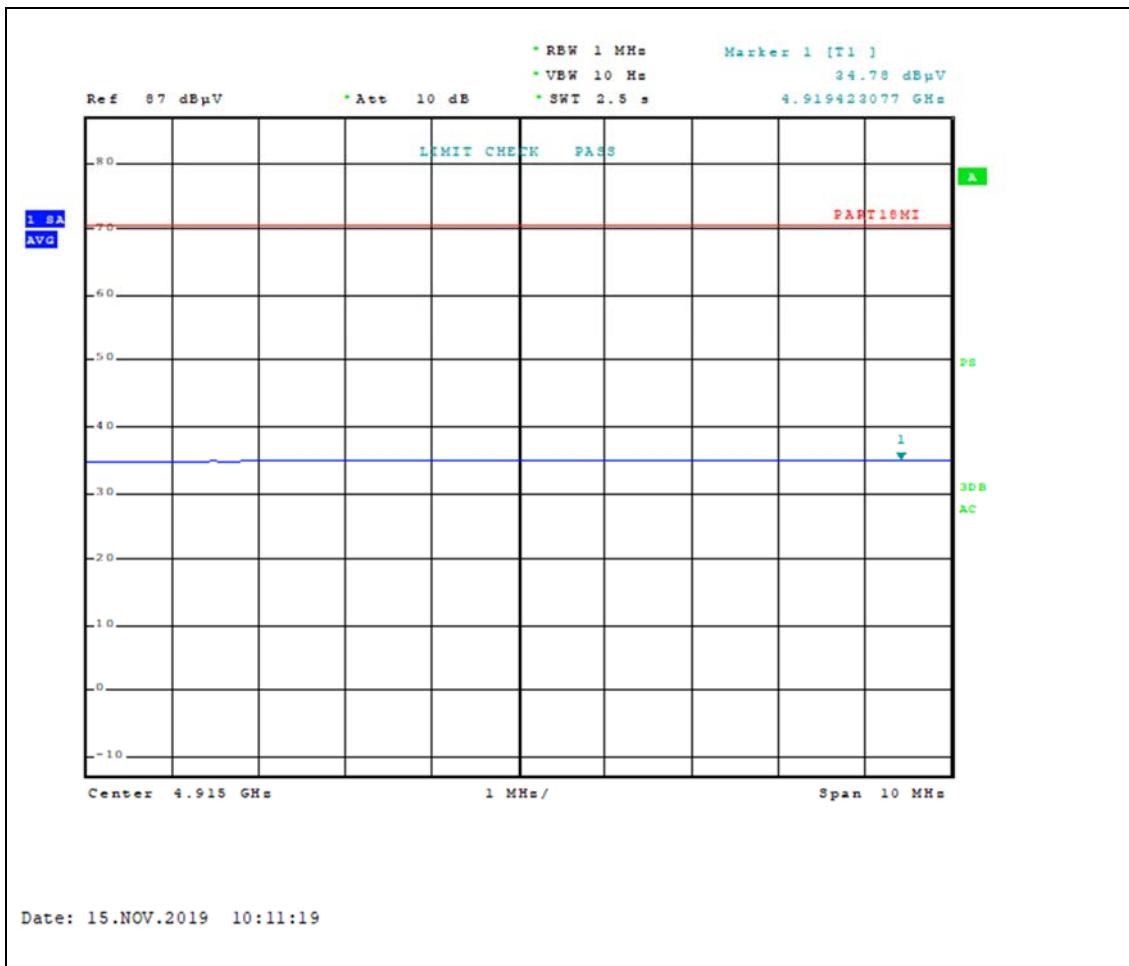

**4919.42 MHz**

## PLOTS OF EMISSIONS


- Radiated Emissions (Above 1 GHz)**

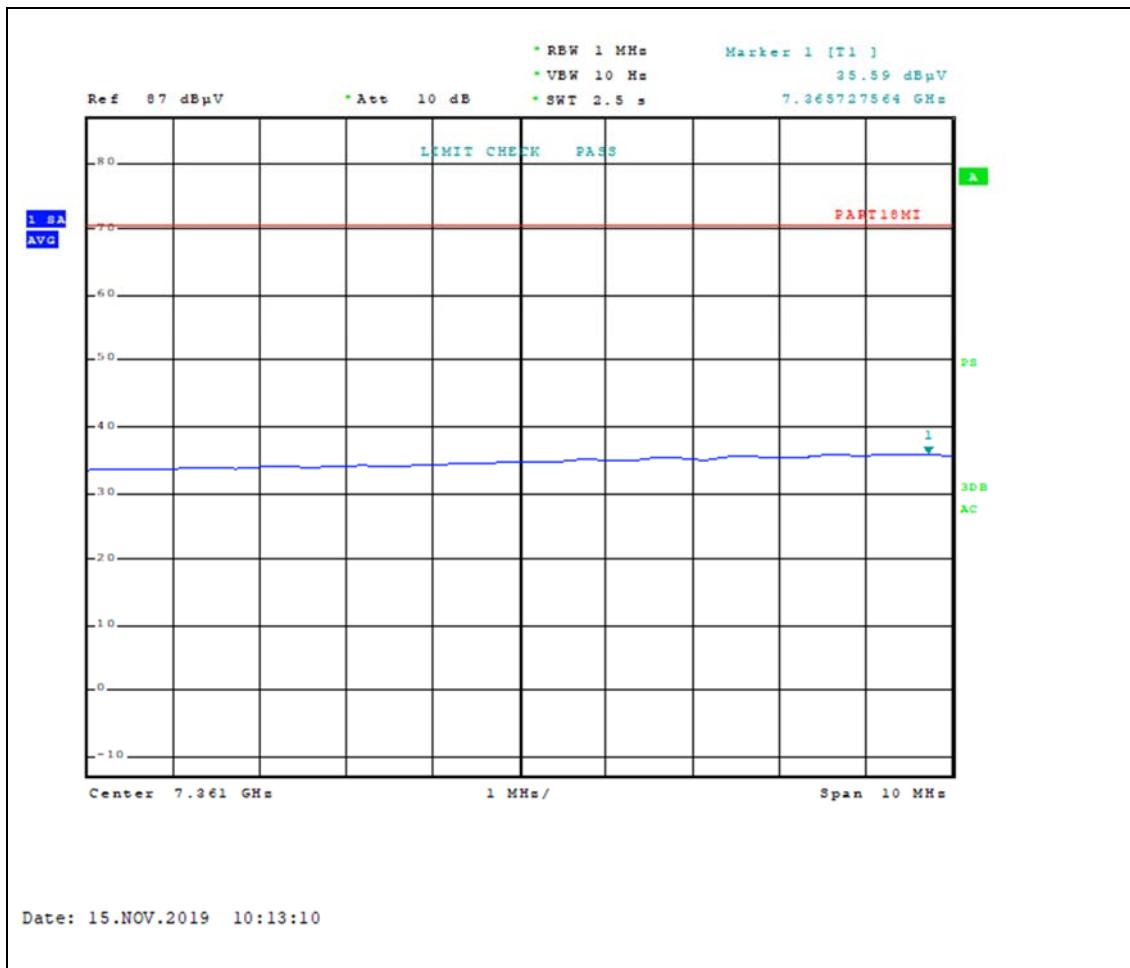

**7365.72 MHz**

## PLOTS OF EMISSIONS


- Radiated Emissions (Above 1 GHz)**

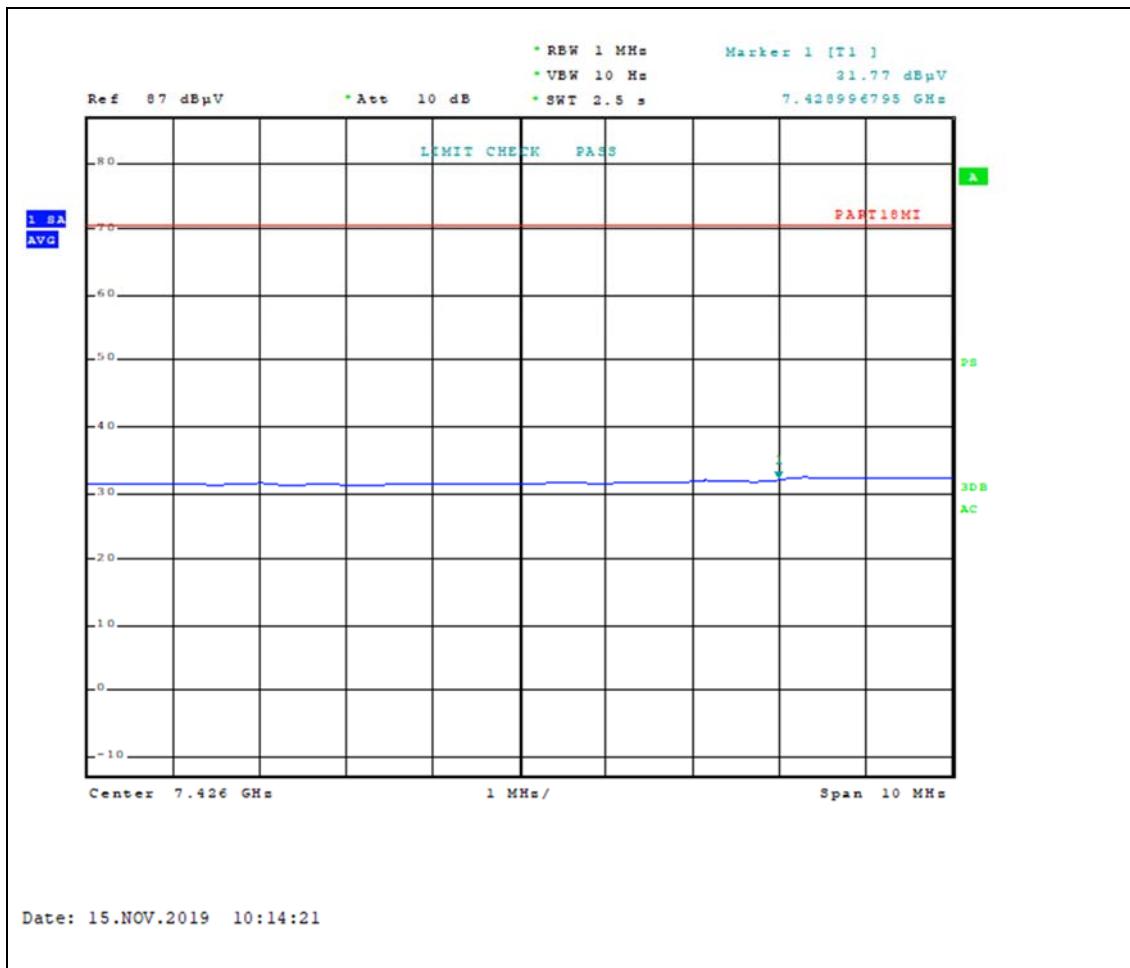

**7428.99 MHz**

## PLOTS OF EMISSIONS


- Radiated Emissions (Above 1 GHz)**

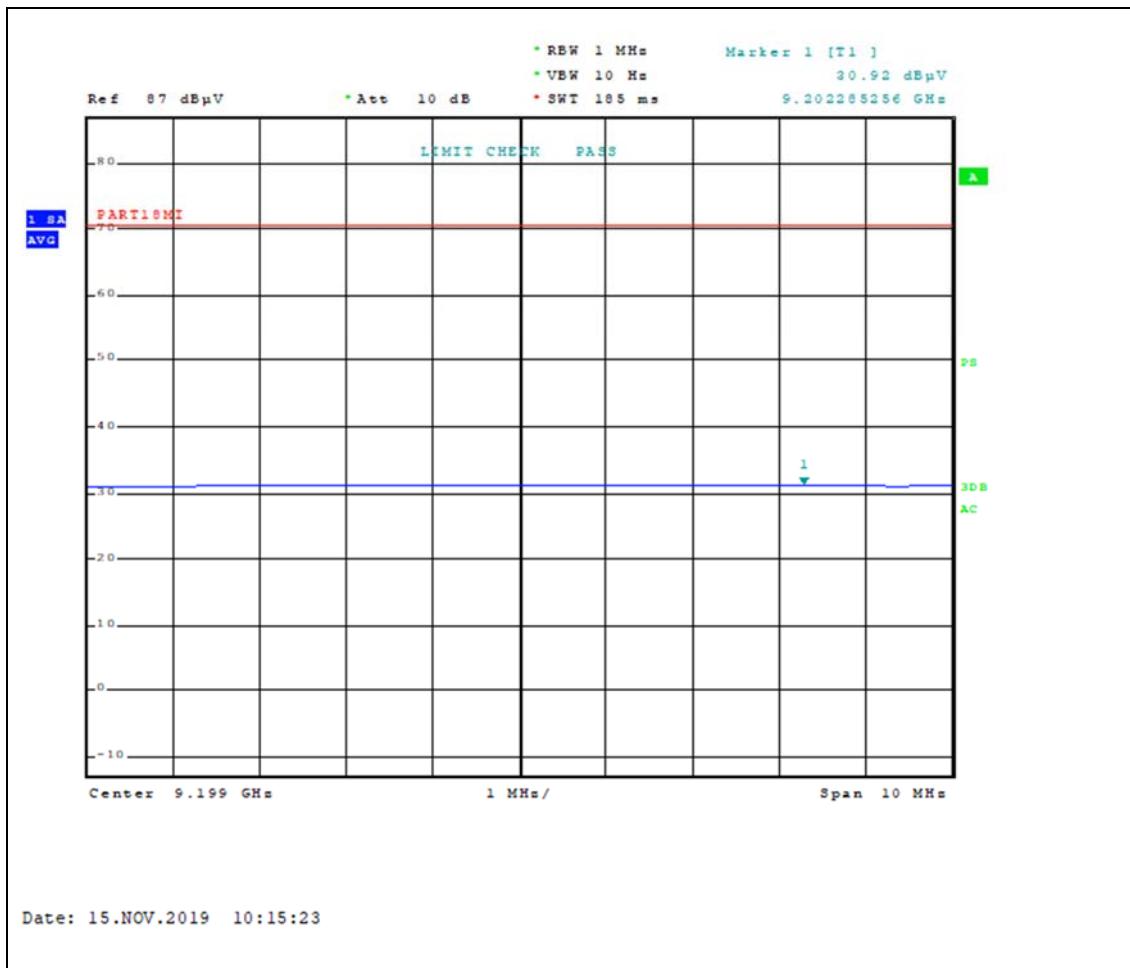

**9202.28 MHz**

## PLOTS OF EMISSIONS


- **Radiated Emissions (Above 1 GHz)**

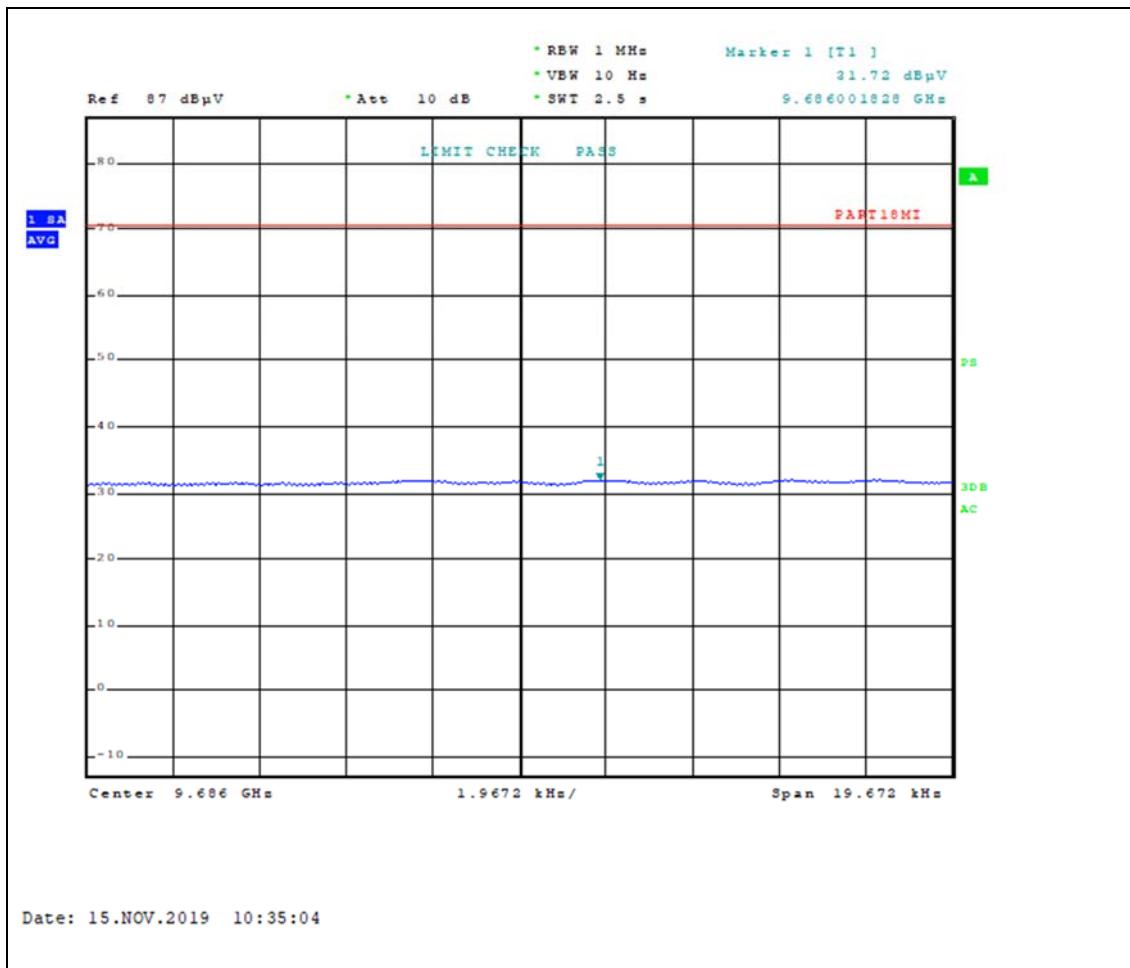

**9686 MHz**

## PLOTS OF EMISSIONS


- **Radiated Emissions (Above 1 GHz)**

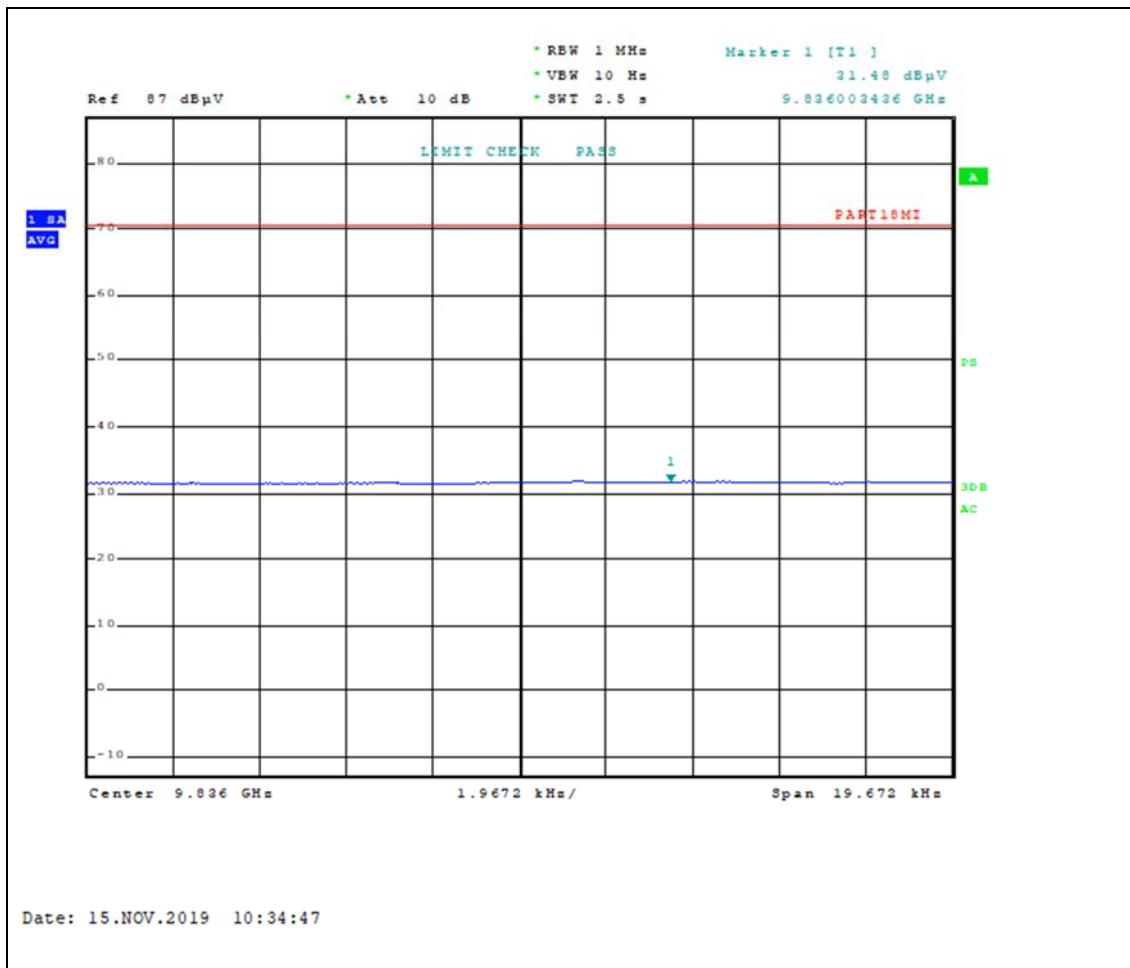

9836 MHz

## PLOTS OF EMISSIONS


- Radiated Emissions (Above 1 GHz)**

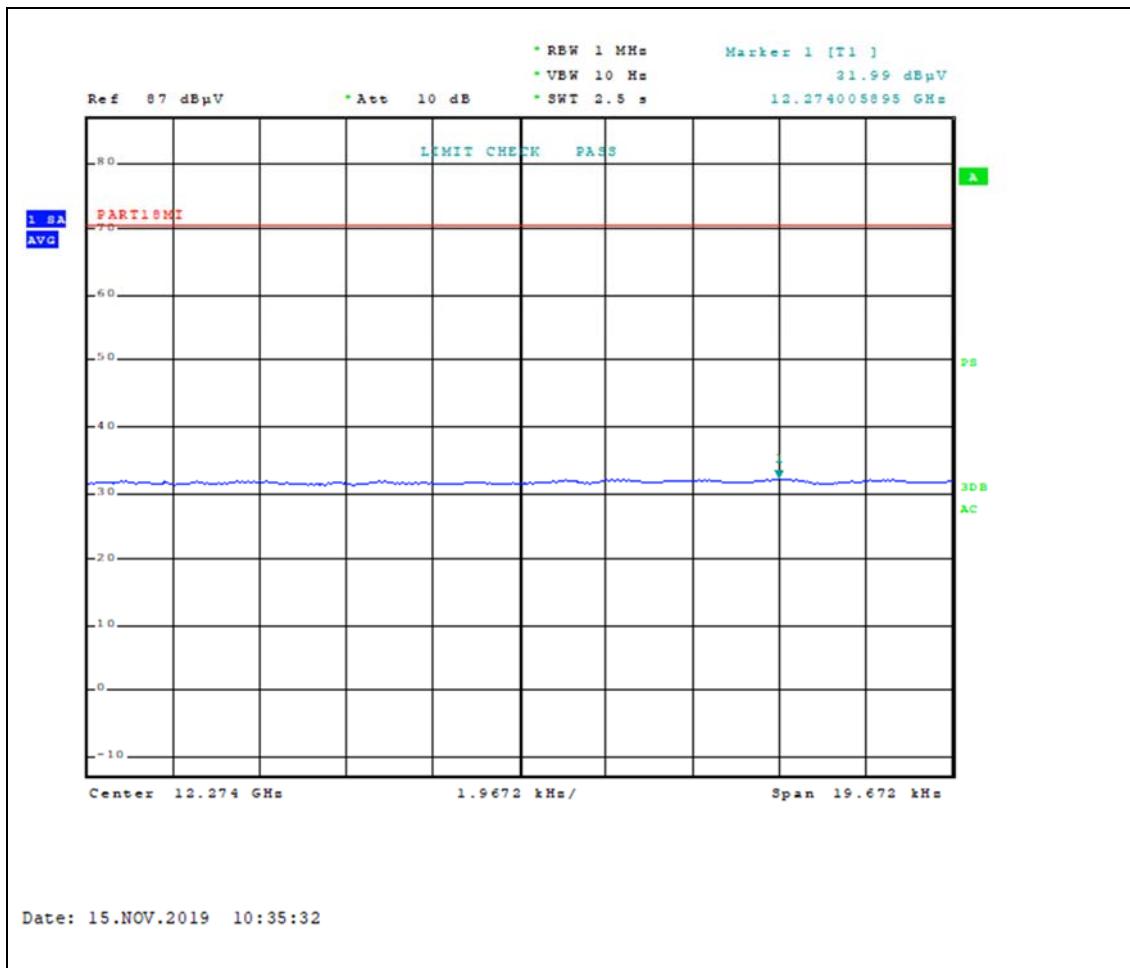

**12274 MHz**

## PLOTS OF EMISSIONS


- **Radiated Emissions (Above 1 GHz)**

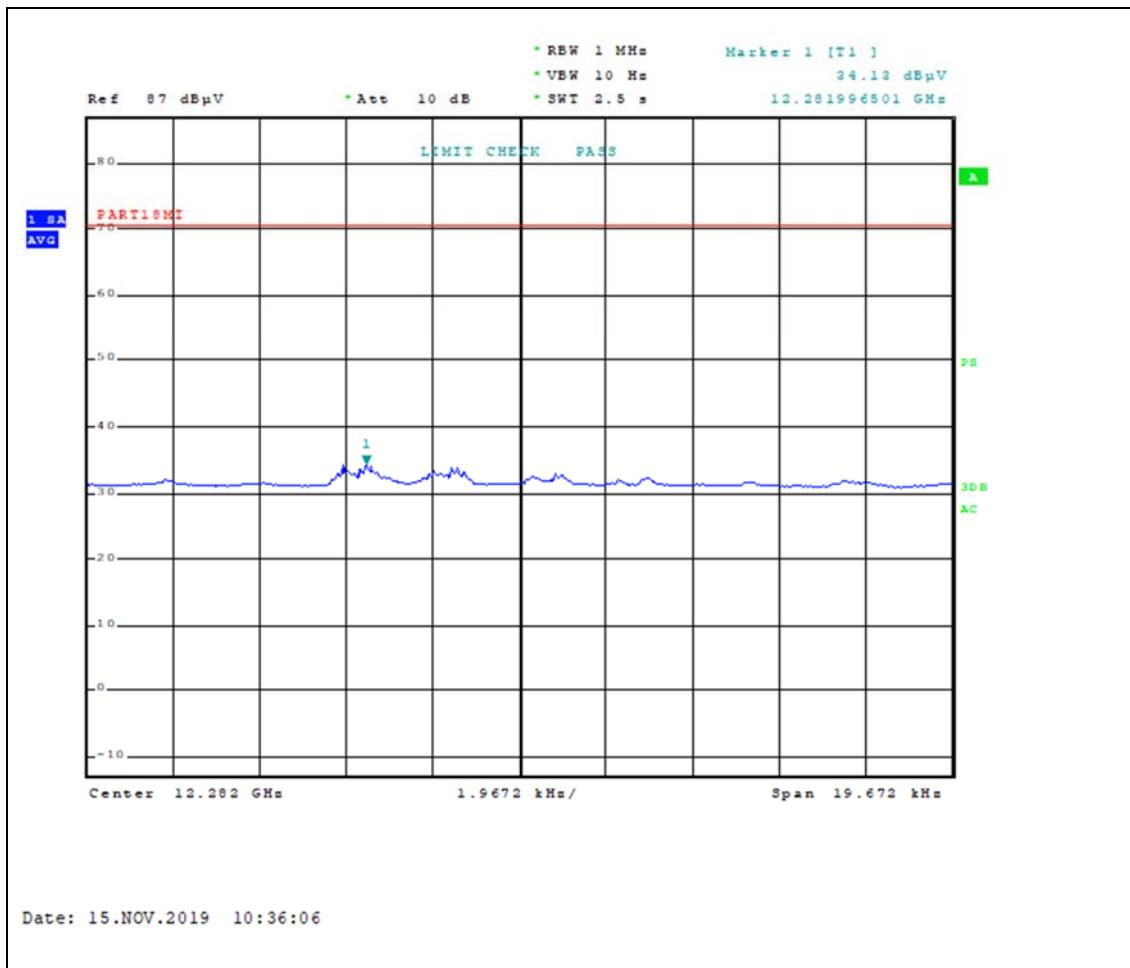

12281.99 MHz

## PLOTS OF EMISSIONS


- **Radiated Emissions (Above 1 GHz)**

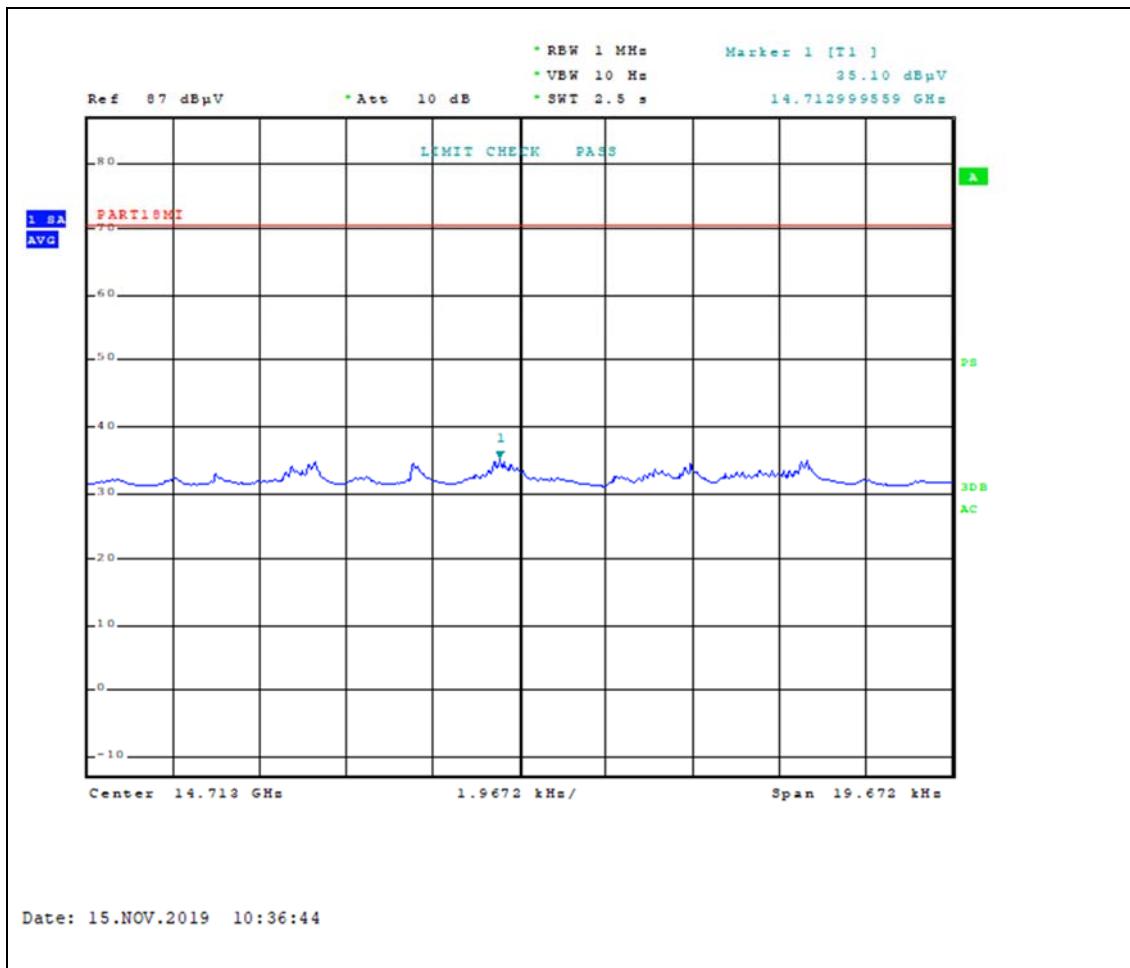

**14712.99 MHz**

## PLOTS OF EMISSIONS


- Radiated Emissions (Above 1 GHz)**

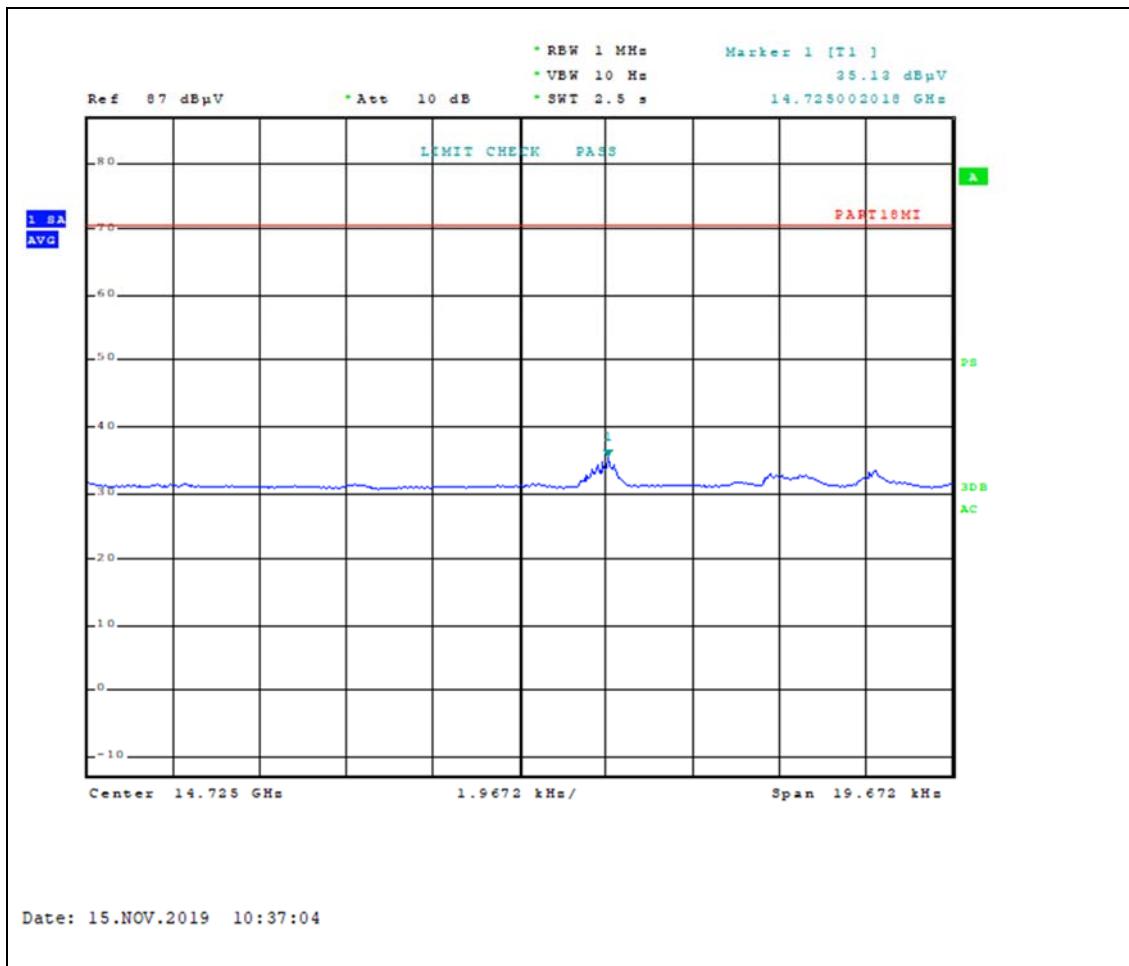

**14725 MHz**

## PLOTS OF EMISSIONS


- Radiated Emissions (Above 1 GHz)**

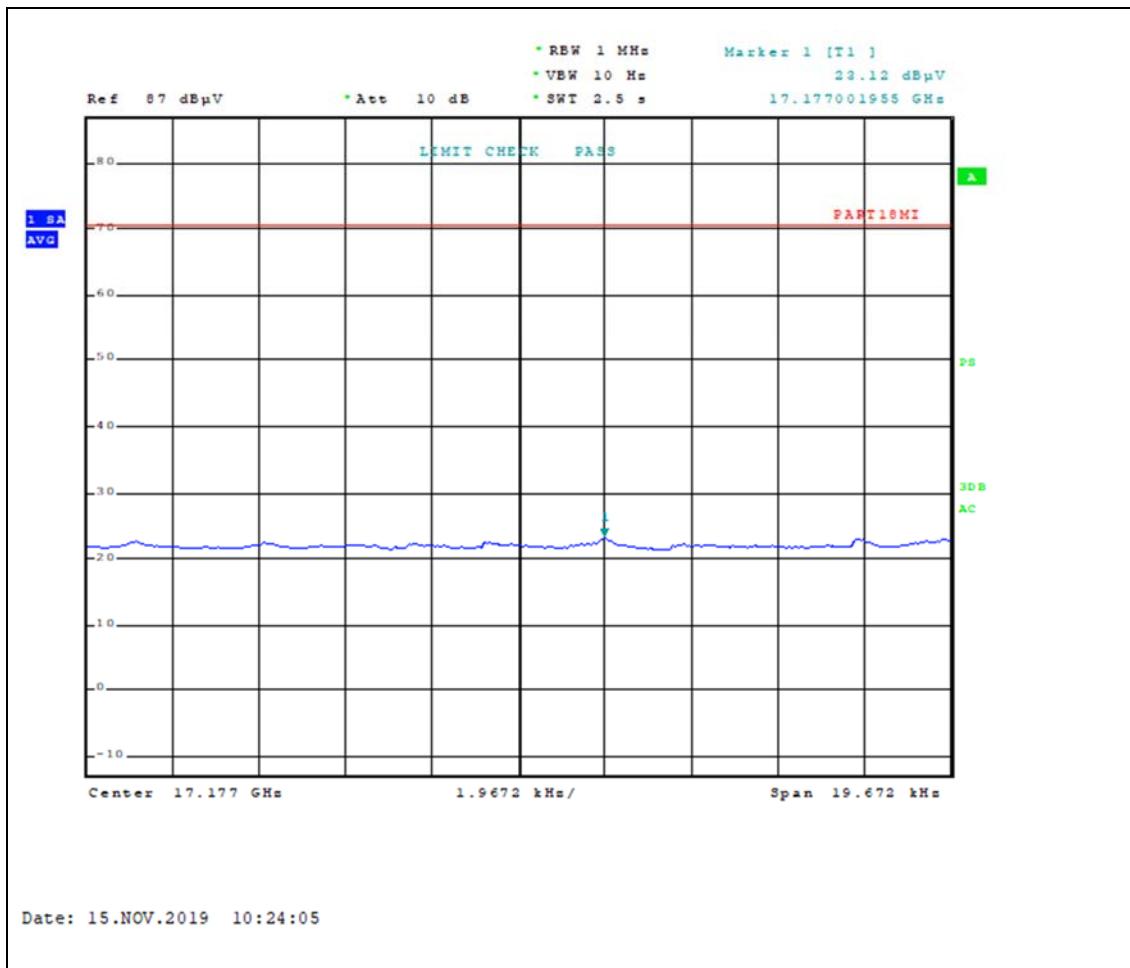

**17177 MHz**

## PLOTS OF EMISSIONS


- Radiated Emissions (Above 1 GHz)**

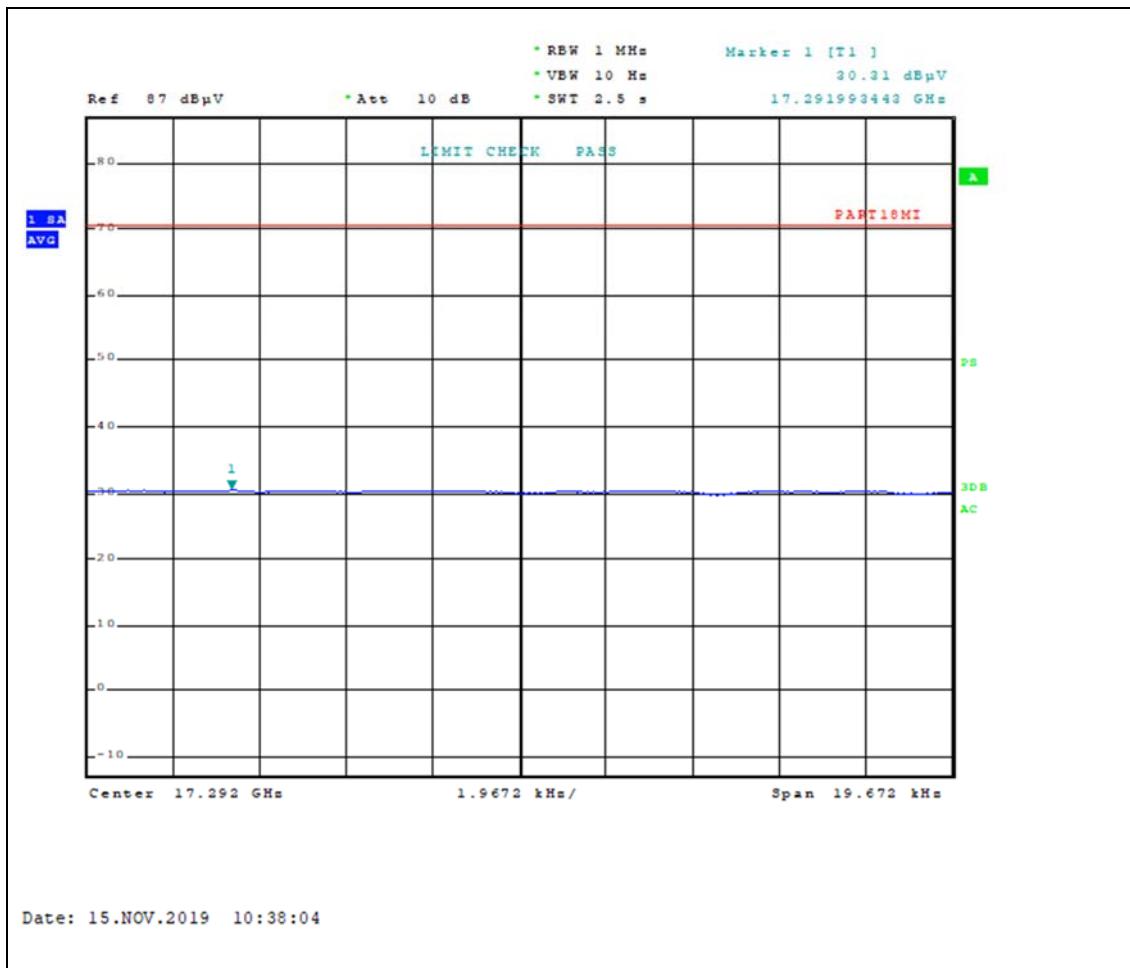

**17291.99 MHz**

## PLOTS OF EMISSIONS


- Radiated Emissions (Above 1 GHz)**

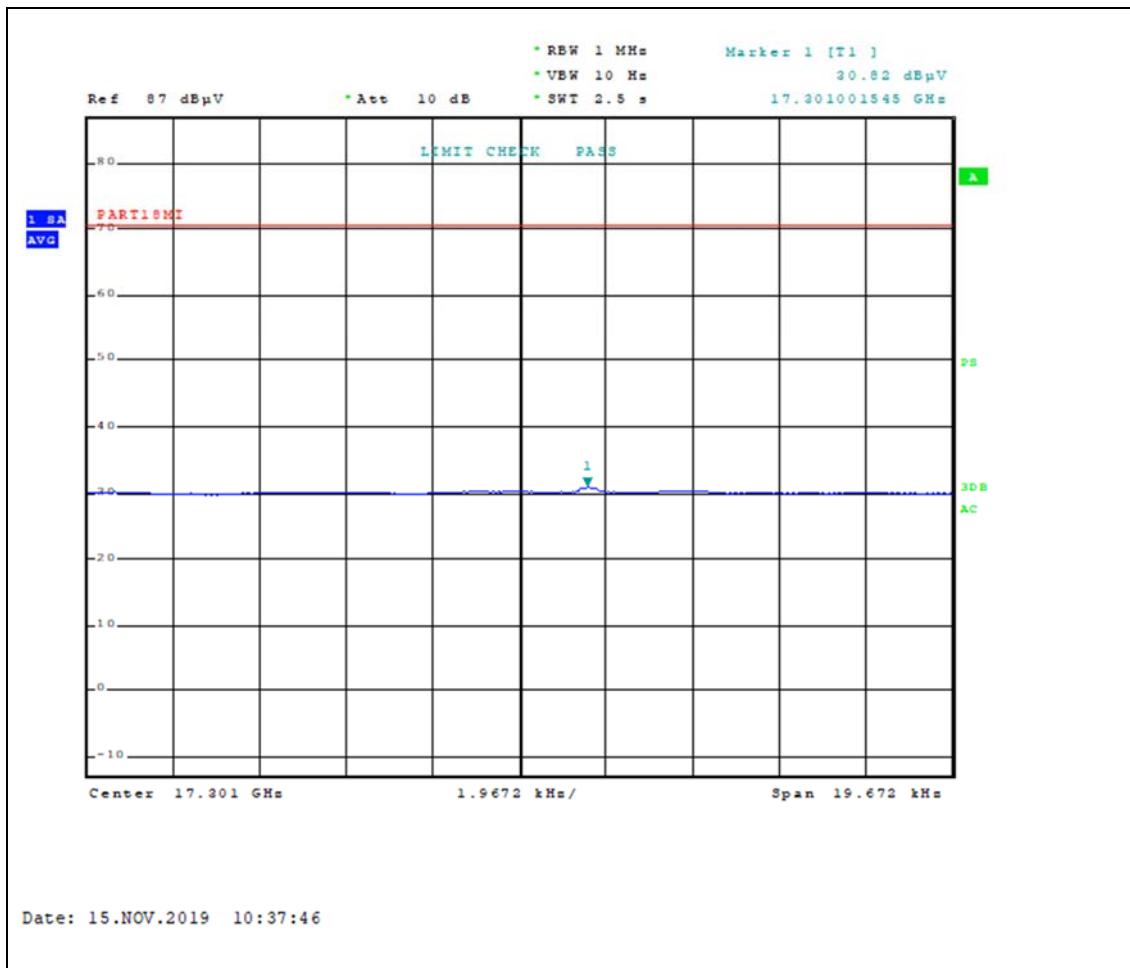

17301 MHz

## PLOTS OF EMISSIONS


- Radiated Emissions (Above 1 GHz)**

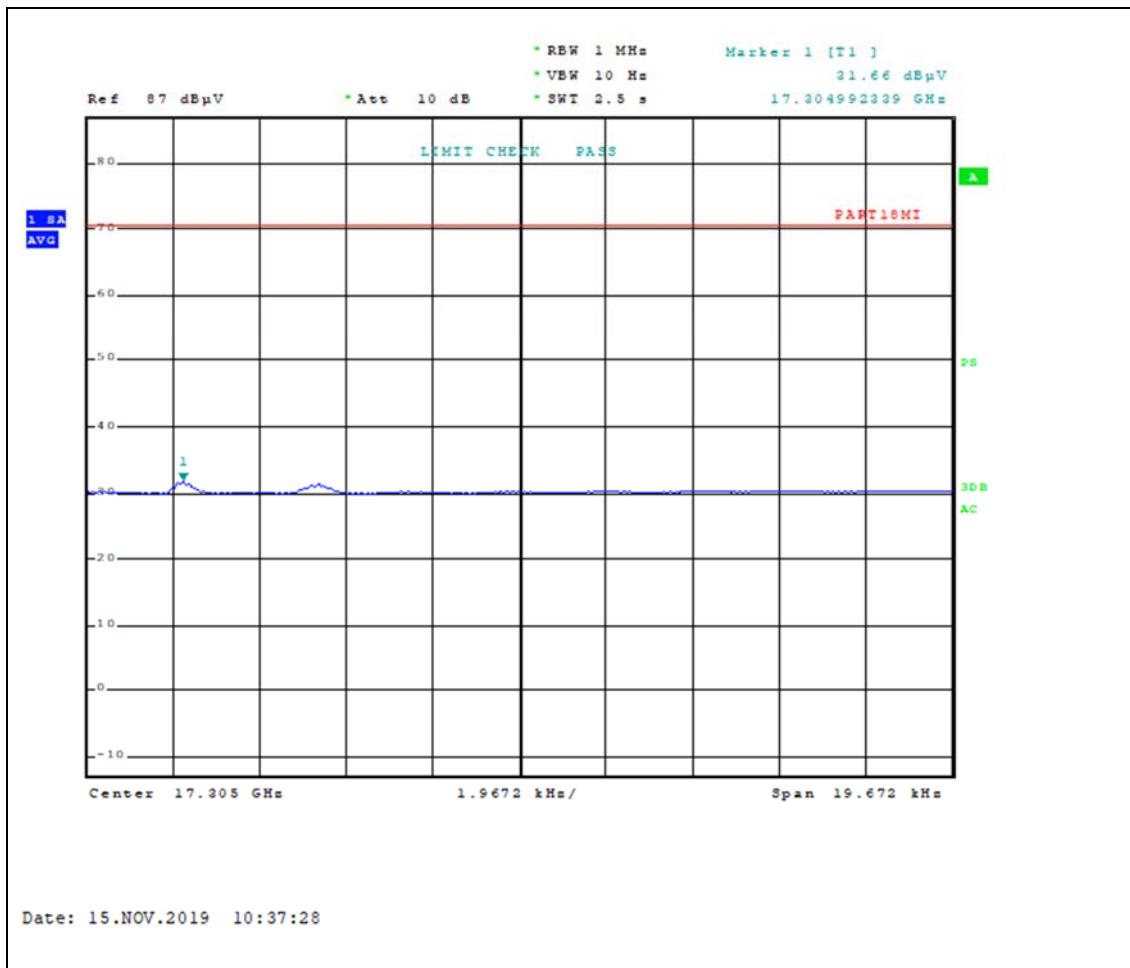

17304.99 MHz

## PLOTS OF EMISSIONS


- Radiated Emissions (Above 1 GHz)**

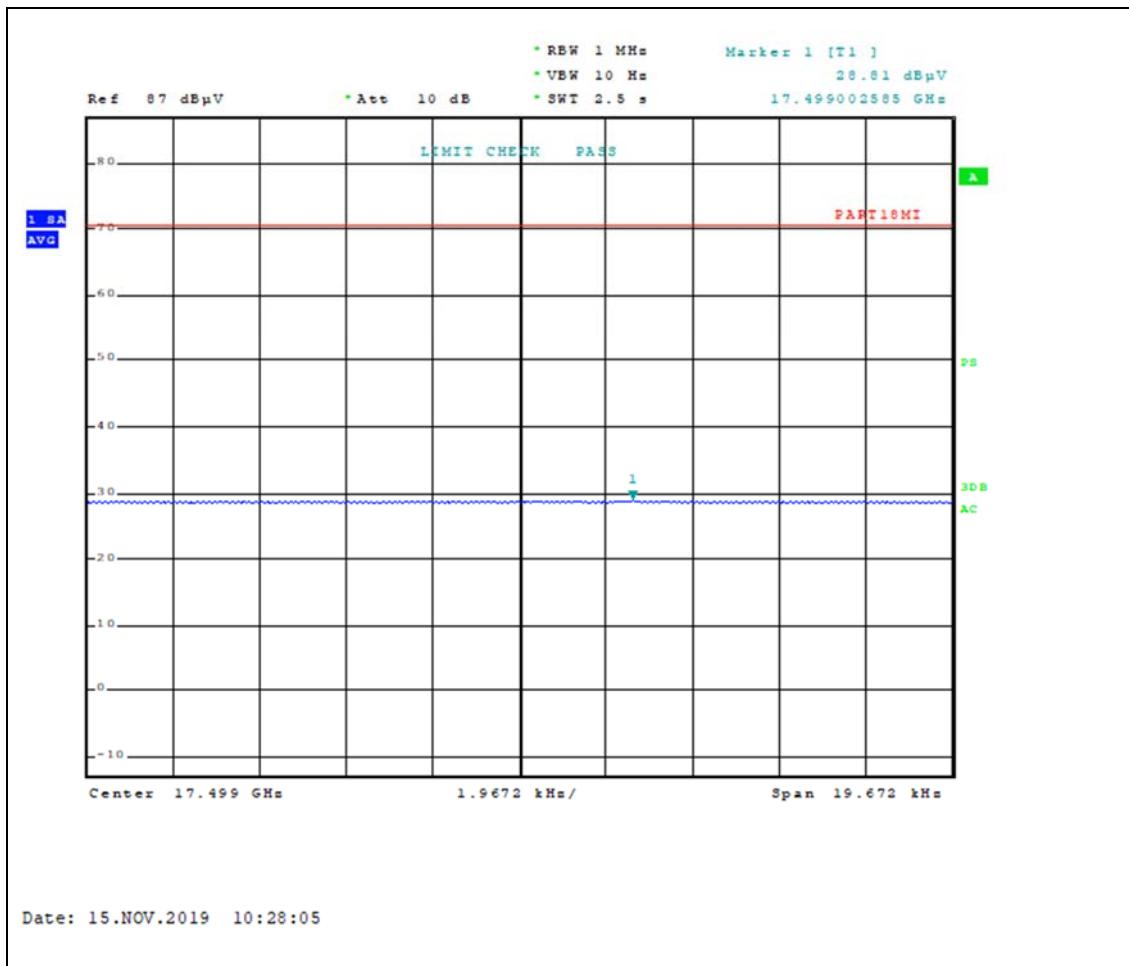

17499 MHz

## PLOTS OF EMISSIONS


- Radiated Emissions (Above 1 GHz)**

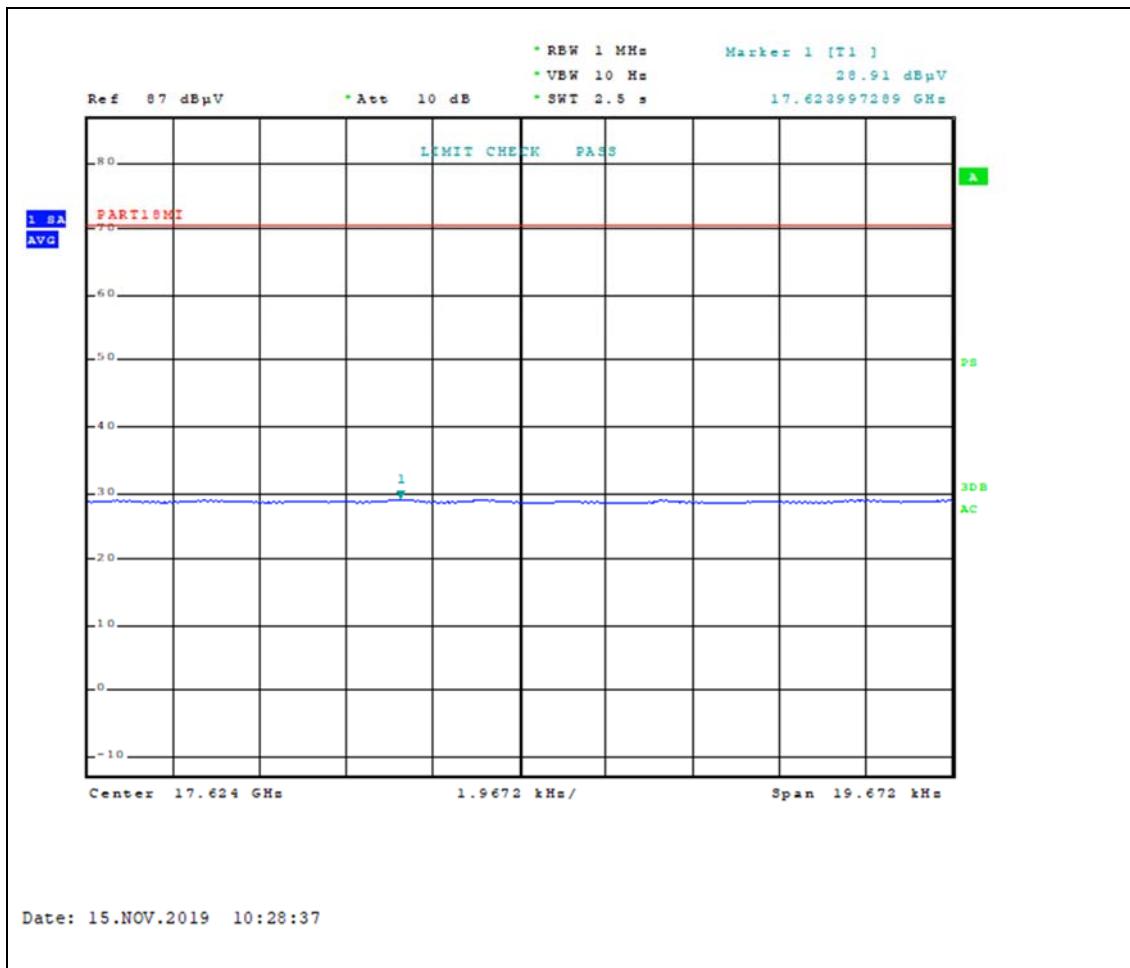

**17623.99 MHz**

## PLOTS OF EMISSIONS

- Radiated Emissions (Above 1 GHz)**

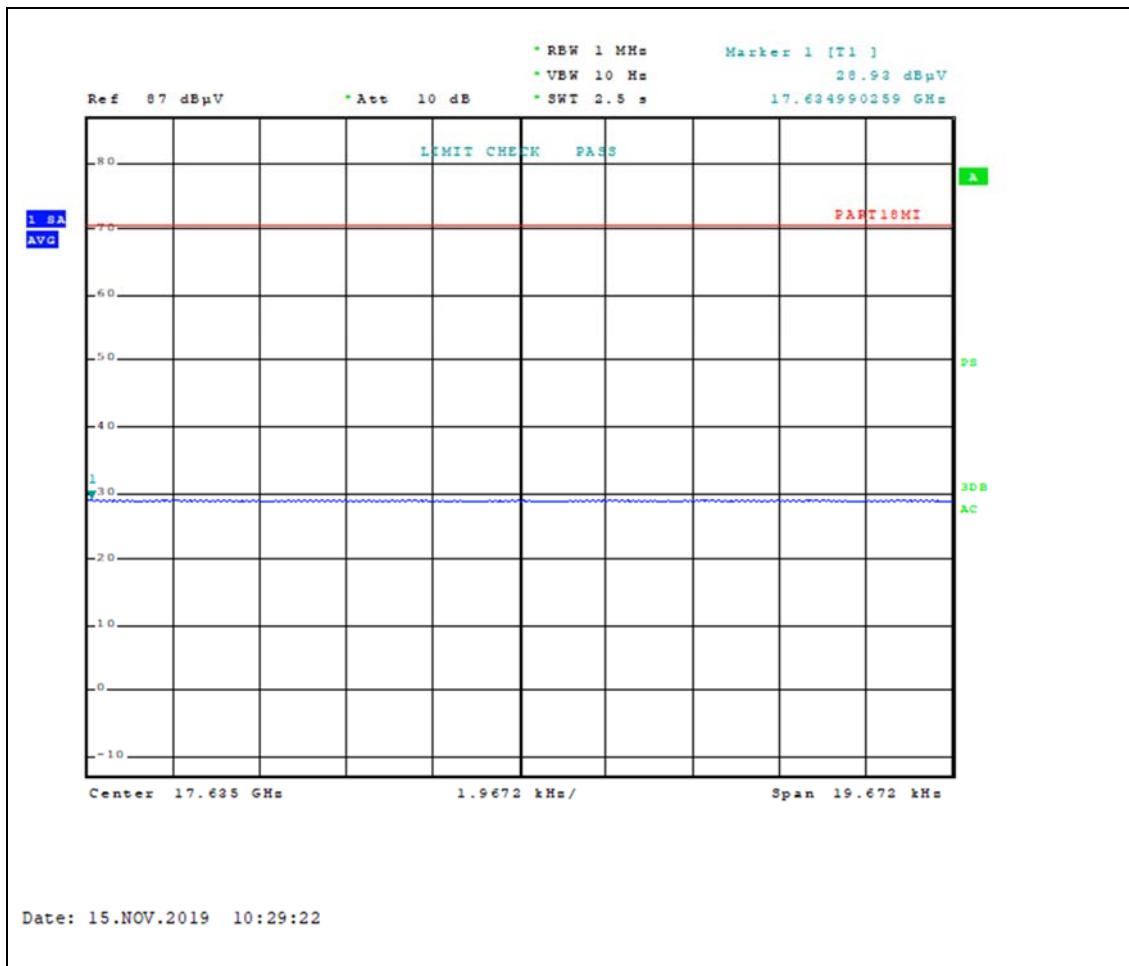

17634.99 MHz

## ACCURACY OF MEASUREMENT

The Measurement Uncertainties stated were calculated in accordance with the requirements of measurement uncertainty contained in CISPR 16-4-2 with the confidence level of 95 %

### 1. Conducted Uncertainty Calculation

Source of Uncertainty	$X_i$	Uncertainty of $X_i$		Coverage factor $k$	$u(X_i)$ (dB)	$C_i$	$C_i u(X_i)$ (dB)
		Value (dB)	Probability Distribution				
Receiver reading	$R_s$	$\pm 0.01$	normal 1	1.00	0.01	1	0.01
AMN Voltage division factor	$L_{AMN}$	$\pm 1.6$	normal 2	2.00	0.80	1	0.08
Sine wave voltage	$dV_{SW}$	$\pm 0.17$	normal 2	2.00	0.09	1	0.09
Pulse amplitude response	$dV_{PA}$	$\pm 0.39$	normal 2	2.00	0.20	1	0.20
Pulse repetition rate	$dV_{PR}$	$\pm 0.39$	normal 2	2.00	0.20	1	0.20
response	$dV_{RF}$	$\pm 0.00$	rectangular	$\sqrt{3}$	0.00	1	0.00
Noise floor proximity	$dV_{RF}$	$\pm 0.10$	rectangular	$\sqrt{3}$	0.06	1	0.06
AMN VDF frequency interpolation	$dz$	$+2.60$ $-2.70$	Triangular	$\sqrt{6}$	1.10	1	1.10
AMN Impedance	$M$	$\pm 0.07$	U-Shaped	$\sqrt{2}$	0.05	1	0.05
Remark	Using 50 $\Omega$ / 50 $\mu$ H AMN						
Combined Standard Uncertainty	Normal			$uc = 1.39$ dB			
Expended Uncertainty U	Normal ( $k = 2$ )			$U = 2.8$ dB (CL is 95 %)			

## 2. Radiation Uncertainty Calculation (Below 1 GHz)

Source of Uncertainty	Xi	Uncertainty of Xi		Coverage factor <i>k</i>	u(Xi) (dB)	Ci	Ci u(Xi) (dB)
		Value (dB)	Probability Distribution				
Receiver reading	<i>Ri</i>	± 0.04	normal 1	1.00	0.04	1	0.04
Sine wave voltage	<i>dVsw</i>	± 0.17	normal 2	2.00	0.09	1	0.09
Pulse amplitude response	<i>dVpa</i>	± 0.54	normal 2	2.00	0.27	1	0.27
Pulse repetition rate response	<i>dVpr</i>	± 0.54	normal 2	2.00	0.27	1	0.27
Noise floor proximity	<i>dVnf</i>	± 0.50	normal 2	2.00	0.29	1	0.29
Antenna Factor Calibration	<i>A<sub>F</sub></i>	± 1.30	rectangular	2.00	0.65	1	0.65
Antenna Directivity	<i>A<sub>D</sub></i>	± 0.50	rectangular	$\sqrt{3}$	0.29	1	0.29
Antenna Factor Height Dependence	<i>A<sub>H</sub></i>	± 0.50	rectangular	$\sqrt{3}$	0.29	1	0.29
Antenna Phase Centre Variation	<i>A<sub>P</sub></i>	± 0.20	rectangular	$\sqrt{3}$	0.12	1	0.12
Antenna Factor Frequency Interpolation	<i>A<sub>i</sub></i>	± 0.3	rectangular	$\sqrt{3}$	0.17	1	0.17
Site Imperfections	<i>S<sub>i</sub></i>	± 4.00	Triangular	$\sqrt{6}$	1.63	1	1.63
Measurement Distance Variation	<i>D<sub>V</sub></i>	± 0.60	rectangular	$\sqrt{3}$	0.35	1	0.35
Antenna Balance	<i>D<sub>bal</sub></i>	± 1.00	rectangular	$\sqrt{3}$	0.58	1	0.58
Cross Polarization	<i>D<sub>Cross</sub></i>	± 0.90	rectangular	$\sqrt{3}$	0.52	1	0.52
Mismatch	<i>M</i>	+ 1.32 - 1.57	U-Shaped	$\sqrt{2}$	0.11	1	1.11
EUT Volume Diameter	<i>V<sub>d</sub></i>	0.33	Normal 1	1.00	0.33	1	0.33
Combined Standard Uncertainty		Normal			$uc = 2.36$ dB		
Expended Uncertainty U		Normal ( <i>k</i> = 2)			$U = 4.8$ dB (CL is 95 %)		

### 3. Radiation Uncertainty Calculation (Above 1 GHz)

Source of Uncertainty	Xi	Uncertainty of Xi		Coverage factor <i>k</i>	u(Xi) (dB)	Ci	Ci u(Xi) (dB)
		Value (dB)	Probability Distribution				
Receiver reading	<i>Ri</i>	0.25	normal 1	1.00	0.25	1	0.25
Preamplifier gain	<i>Gp</i>	± 0.23	normal 2	2	0.12	1	0.12
Receiver Sine Wave	<i>dVsw</i>	± 0.27	normal 2	2	0.14	1	0.14
Instability of preamp gain	<i>dGpw</i>	± 1.2	rectangular	$\sqrt{3}$	0.70	1	0.70
Noise Floor Proximity	<i>dVnf</i>	± 0.70	rectangular	$\sqrt{3}$	0.40	1	0.40
Antenna Factor Calibration	<i>AF</i>	± 1.50	normal 2	2	0.75	1	0.75
Directivity difference	<i>A<sub>D</sub></i>	± 3.00	rectangular	$\sqrt{3}$	0.87	1	0.87
Phase Centre location	<i>A<sub>P</sub></i>	± 0.30	rectangular	$\sqrt{3}$	0.17	1	0.17
Antenna Factor Frequency Interpolation	<i>A<sub>i</sub></i>	± 0.30	rectangular	$\sqrt{3}$	0.17	1	0.17
Site Imperfections	<i>S<sub>i</sub></i>	± 3.00	Triangular	$\sqrt{6}$	1.22	1	1.22
Effect of setup table material	<i>d<sub>ANT</sub></i>	± 1.50	rectangular	$\sqrt{3}$	0.87	1	0.87
Separation distance	<i>d<sub>b</sub></i>	± 0.30	rectangular	$\sqrt{3}$	0.17	1	0.17
Cross Polarization	<i>D<sub>Cross</sub></i>	± 0.90	rectangular	$\sqrt{3}$	0.52	1	0.52
Mismatch (antenna-Preamplifier)	<i>M</i>	+ 1.30 - 1.50	U-Shaped	$\sqrt{2}$	1.06	1	1.06
Mismatch (preamplifier-receiver)	<i>M</i>	+ 1.20 - 1.40	U-Shaped	$\sqrt{2}$	0.99	1	0.99
Combined Standard Uncertainty	Normal			$uc = 2.86 \text{ dB}$			
Expended Uncertainty U	Normal ( <i>k</i> = 2)			$U = 5.8 \text{ dB}$ (CL is 95 %)			

## LIST OF TEST EQUIPMENT

No.	Instrument	Manufacturer	Model	Serial No.	Due to Calibration	Calibration Interval
1	Microwave survey meter	ETS Lindgren	1501	00033549	Jan. 29 2021	2 year
2	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	101041	Apr. 02 2020	1 year
3	Software	ROHDE & SCHWARZ	EMC32	Version 8.53.0	-	-
4	ARTIFICIAL MAINS NETWORK	ROHDE & SCHWARZ	ESH2-Z5	100273	Apr. 02 2020	1 year
5	ATTENUATOR	FAIRVIEW	SA3N5W-10	N/A	Apr. 03 2020	1 year
6	LOOP ANTENNA	ROHDE & SCHWARZ	HFH2-Z2	100279	Feb. 13 2021	2 years
7	EMI Test Receiver	ROHDE & SCHWARZ	ESU 40	100202	Apr. 02 2020	1 year
8	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESW8	100994	Apr. 03 2020	1 year
9	Software	ROHDE & SCHWARZ	EMC32	Version 10.10.01	-	-
10	Signal Conditioning Unit	ROHDE & SCHWARZ	SCU 01	10029	Apr. 02 2020	1 year
11	TRILOG Broadband Test Antenna	SCHWARZBECK	VULB 9163	9163-01027	Jan. 31 2020	2 year
12	ATTENUATOR	FAIRVIEW	SA3N5W-06	N/A	Jan. 08 2020	1 year
13	Controller	innco systems GmbH	CO2000-G	CO2000/562/23890210/L	N/A	N/A
14	Open Switch and Control Unit	ROHDE & SCHWARZ	OSP-120	100015	N/A	N/A
15	Antenna Mast (Left)	innco systems GmbH	MA4000-EP	N/A	N/A	N/A
16	Turn Table	innco systems GmbH	DT3000-3T	N/A	N/A	N/A
17	Signal Conditioning Unit	ROHDE & SCHWARZ	SCU 01	10030	Apr. 03 2020	1 year
18	Signal Conditioning Unit	Rohde & Schwarz	SCU 18	10065	Apr. 02 2020	1 year
19	DOUBLE RIDGED HORN ANTENNA	SCHWARZBECK	HF907	102585	Apr. 09 2021	2 year
20	SWITCH AND POWER DETECTOR UNIT	ROHDE & SCHWARZ	OSP-120	101766	N/A	N/A
21	TILT ANTENNA MAST	innco systems GmbH	MA4640-XP-EP	N/A	N/A	N/A
22	CONTROLLER	innco systems GmbH	CO3000	CO3000/937/383 30516/L	N/A	N/A
23	Turntable	innco systems GmbH	DT2000-2t	N/A	N/A	N/A
24	WiFi Filter Bank	ROHDE & SCHWARZ	U082	N/A	N/A	N/A

## APPENDIX A – SAMPLE LABEL

### Labeling Requirements

The sample label shown shall be *permanently affixed* at a conspicuous location on the device and be readily visible to the user at the time of purchase.




- **FCC ID Location of EUT**




## APPENDIX B – PHOTOGRAPHS OF TEST SET-UP

The **Conducted Test Picture** and **Radiated Test Picture** and show the worst-case configuration and cable placement.


- **Radiation hazard Test Picture**

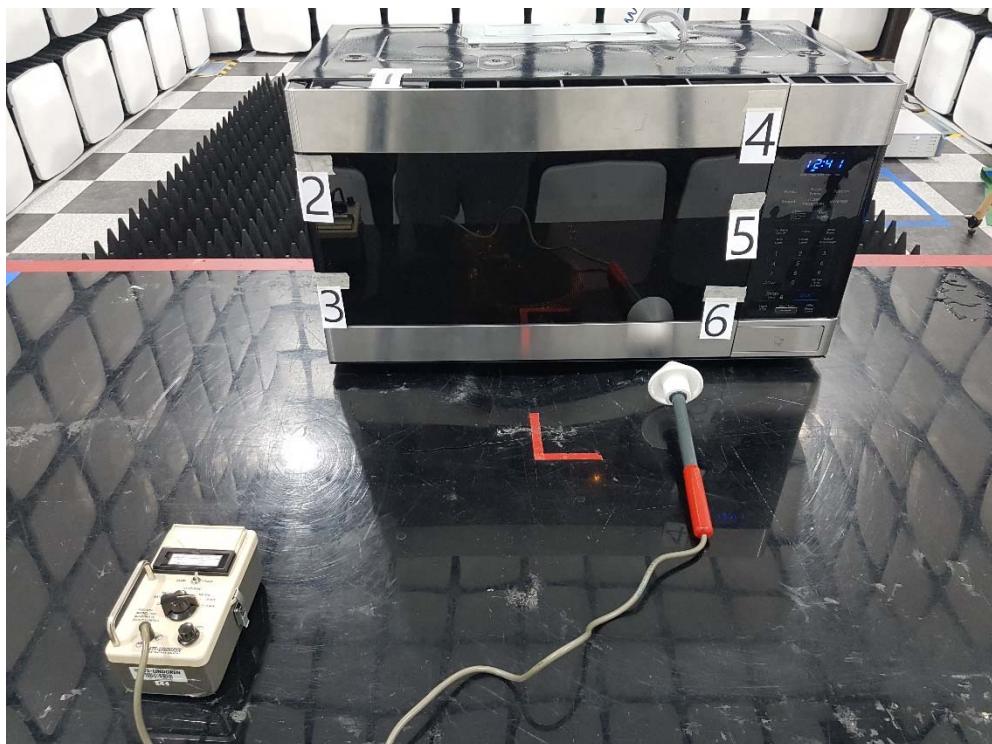


- **Frequency measurement Test Picture**

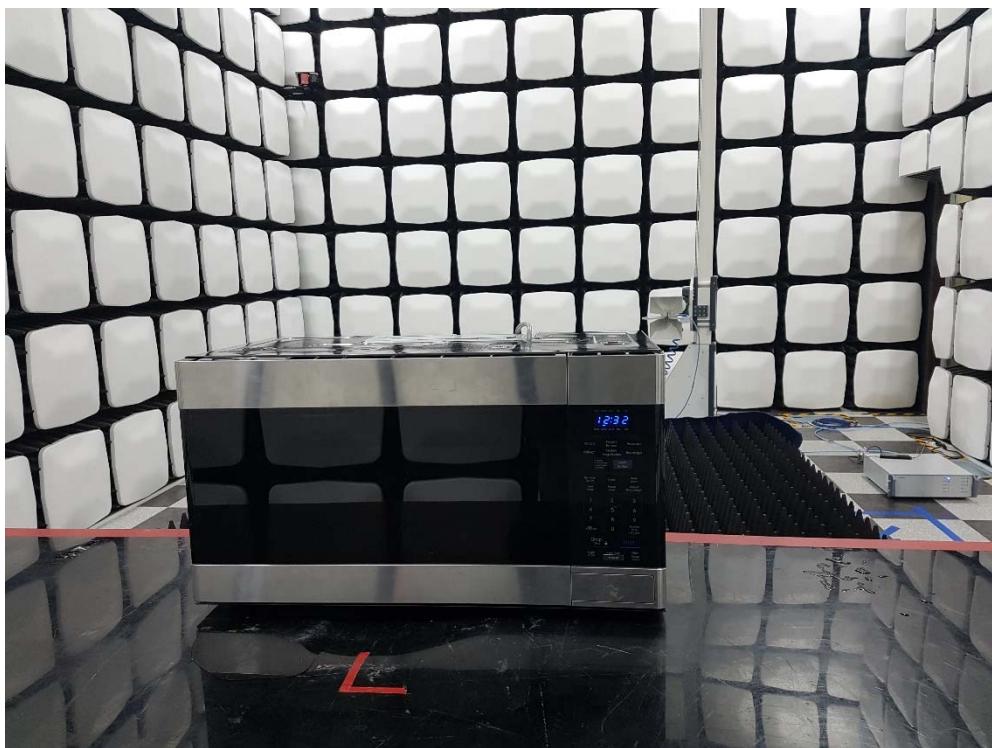

- **Conducted Test Picture (Front)**

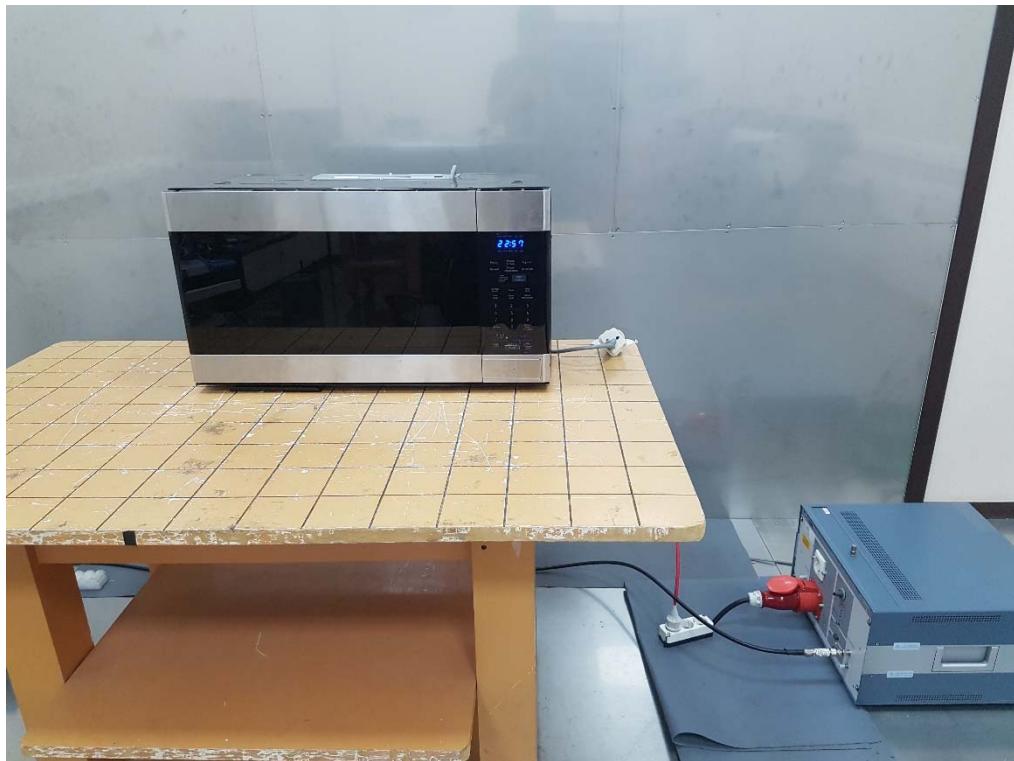

- **Conducted Test Picture (Side)**

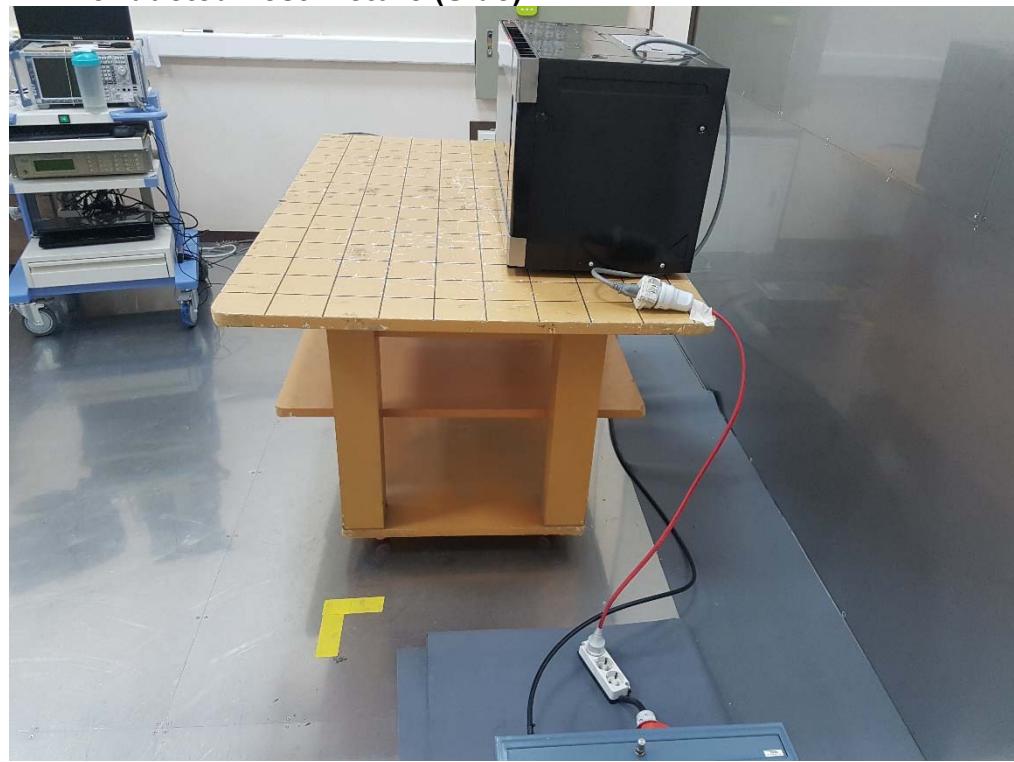

- Radiated Test Picture : 0.15 MHz ~ 30 MHz (Front)



- Radiated Test Picture : 0.15 MHz ~ 30 MHz (Rear)




- Radiated Test Picture : 30 MHz ~ 1 GHz (Front)



- Radiated Test Picture : 30 MHz ~ 1 GHz (Rear)



- Radiated Test Picture : 1 GHz ~ 18 GHz (Front)

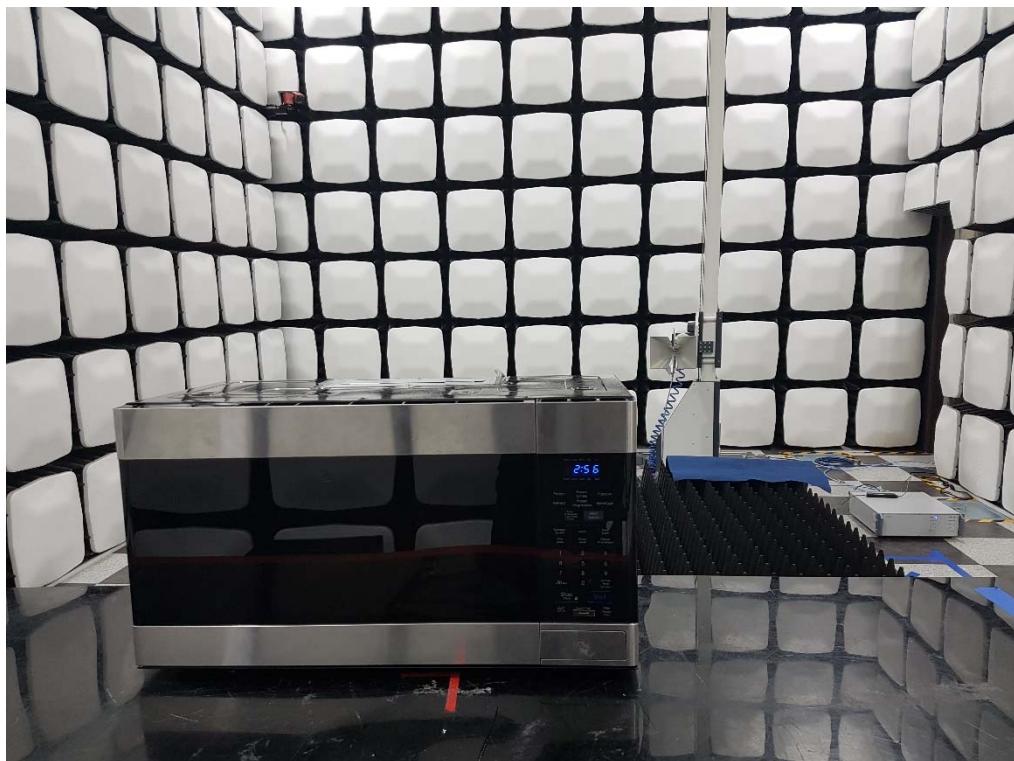

- Radiated Test Picture : 1 GHz ~ 18 GHz (Rear)



## APPENDIX C – EUT PHOTOGRAPHS

---


### 1. Front View of EUT



### 2. Rear View of EUT



### 3. Inside View of EUT

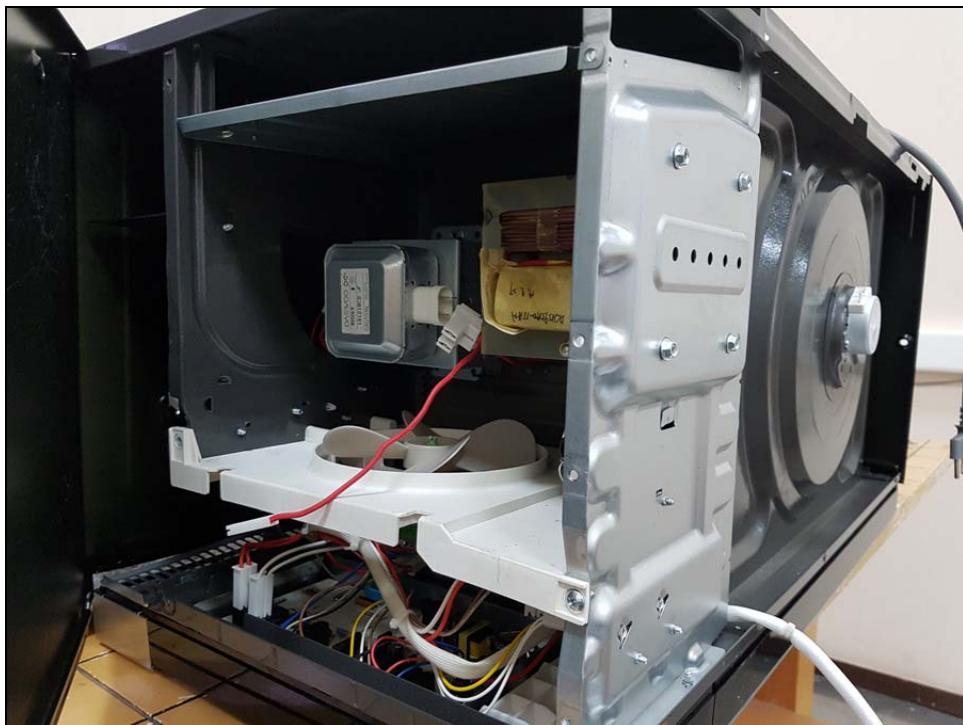

### 4. Front View of Magnetron





## 5. Rear View of Magnetron





## 6. Front View of Thermally Protected L. Air Over

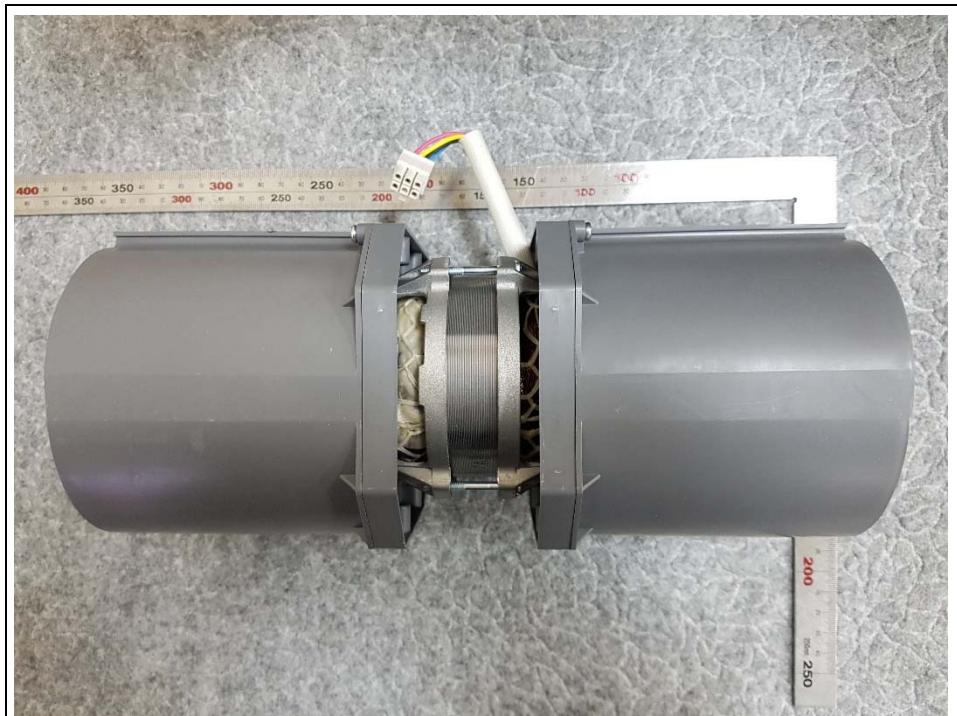


**7. Rear View of Thermally Protected L. Air Over****8. Front View of Synchronous Motor**


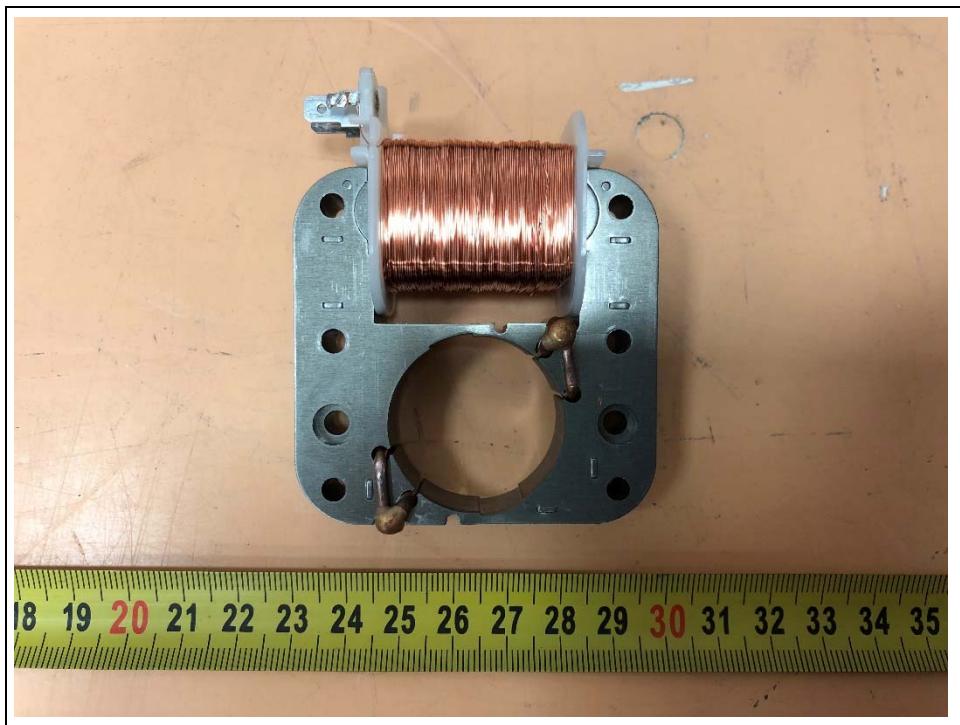
**9. Rear View of Synchronous Motor****10. Front View of FAN MOTOR**


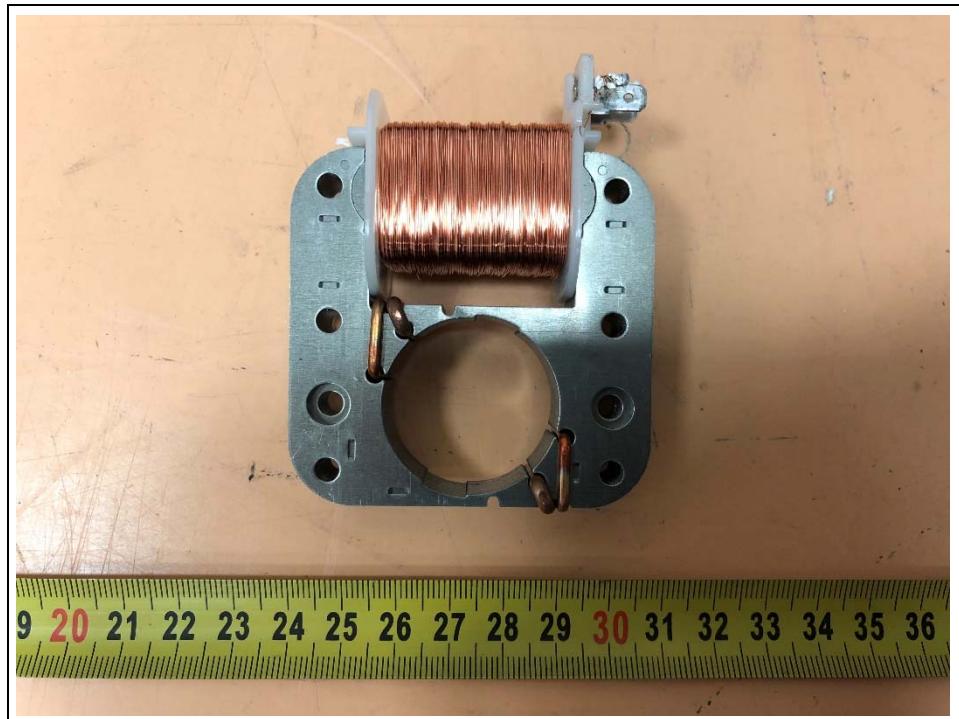
**11. Rear View of FAN MOTOR****12. Front View of Diode H.V.**

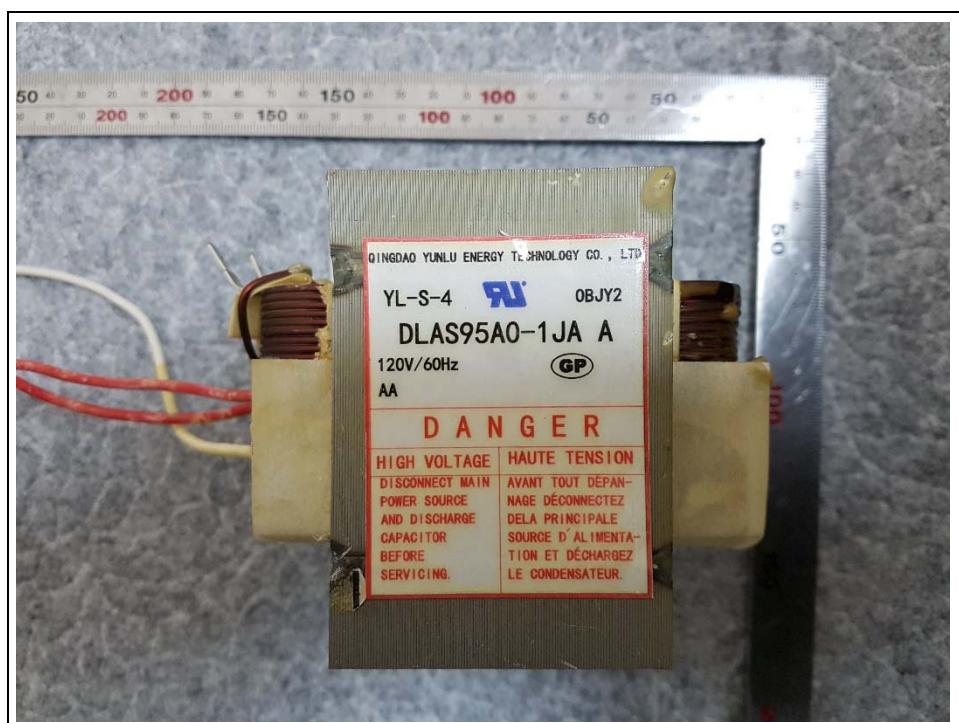**13. Rear View of Diode H.V.****14. Front View of Trans H.V**

**15. Rear View of Trans H.V****16. Front View of H.V. CAPACITOR**

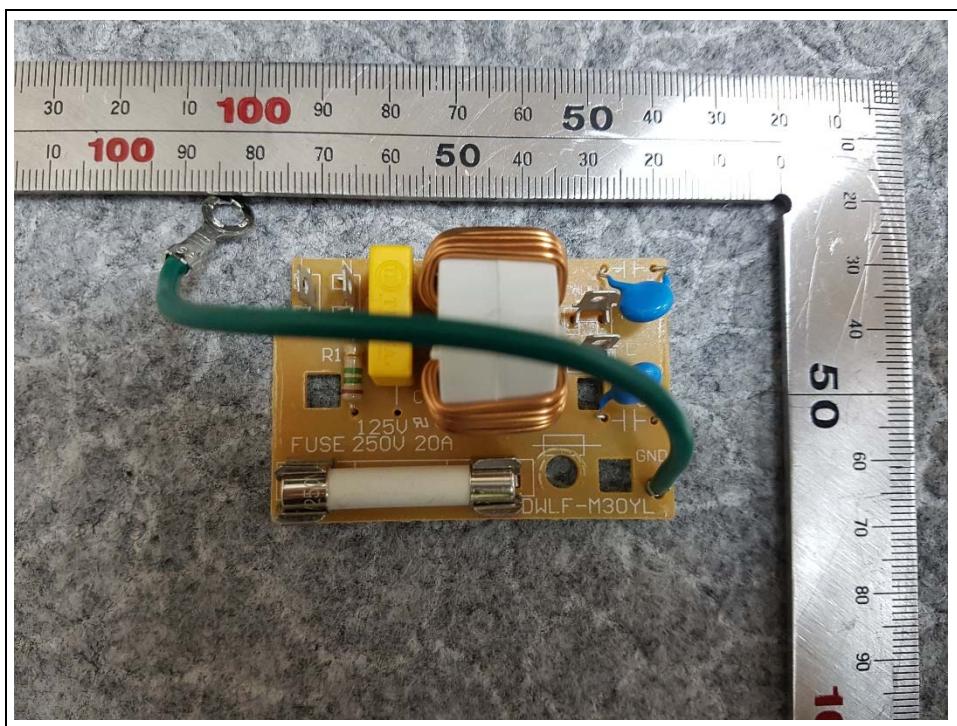**17. Rear View of H.V. CAPACITOR****18. Front View of Noise Filter**

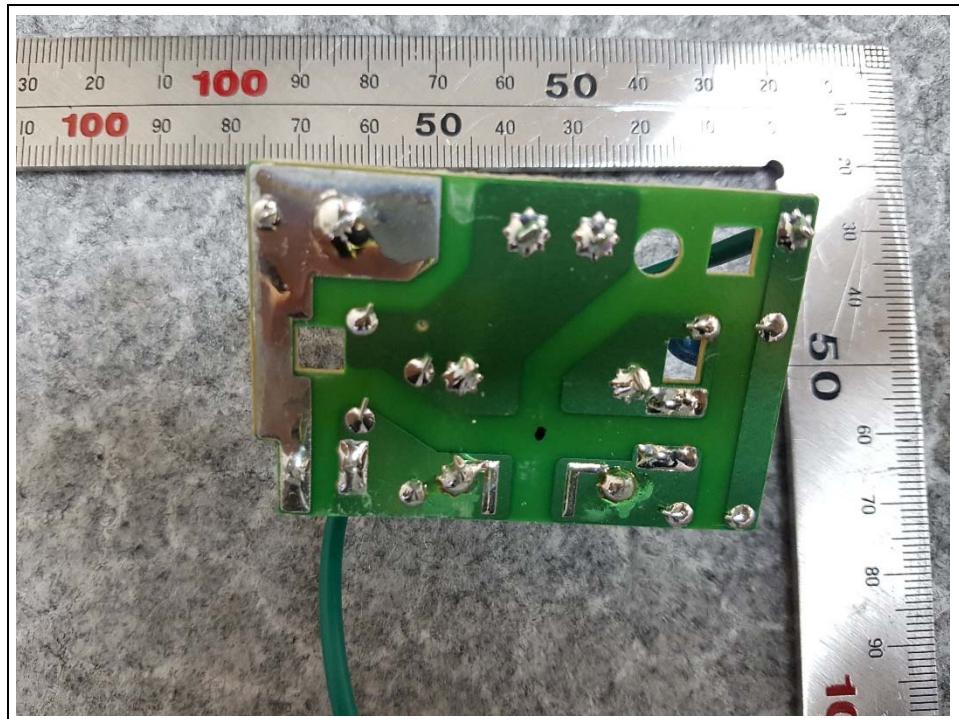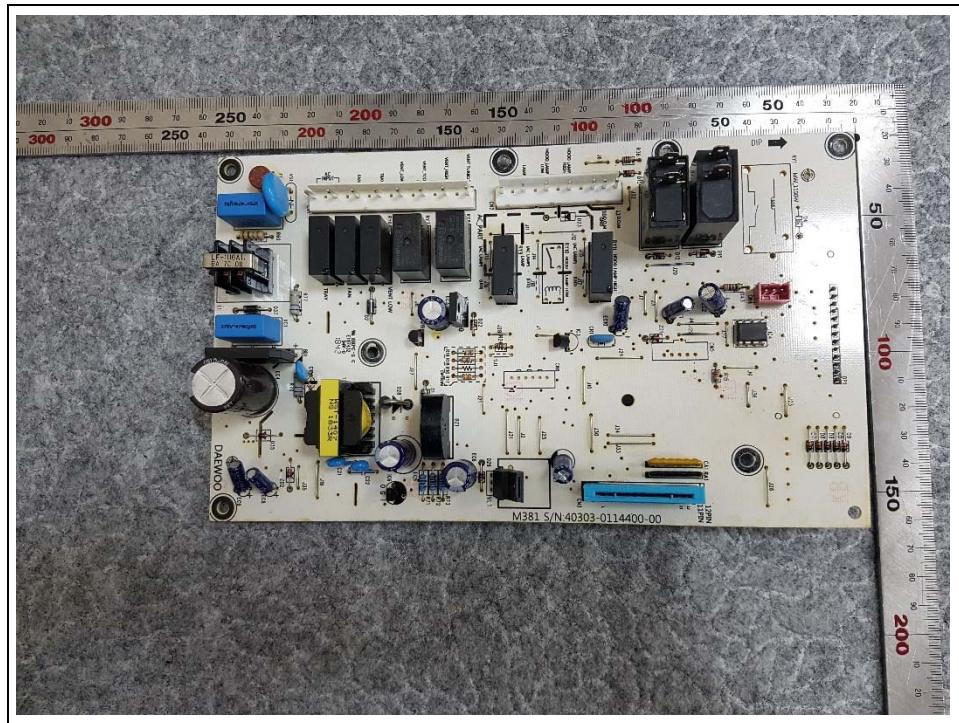**19. Rear View of Noise Filter****20. Front View of Main Board**

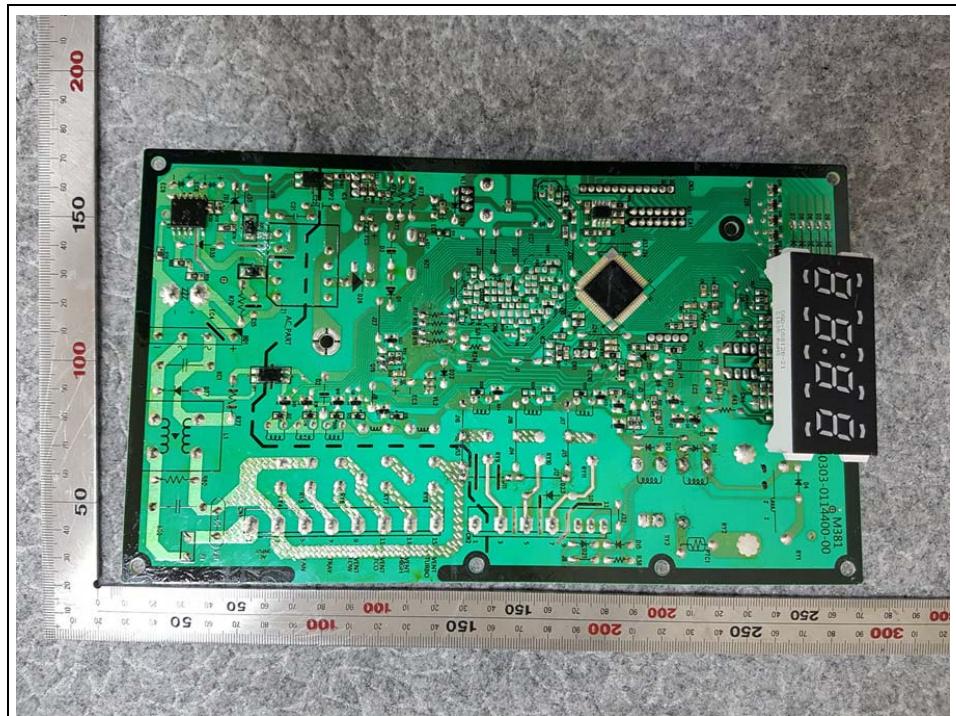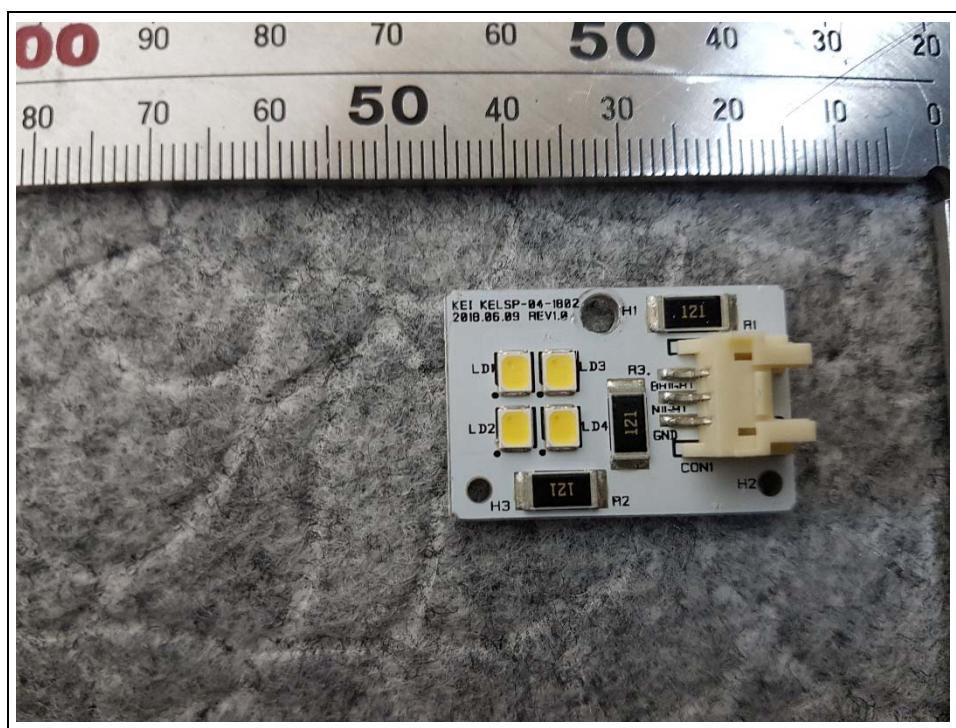**21. Rear View of Main Board****22. Front View of LED Board**

**23. Rear View of LED Board**

## APPENDIX D – SCHEMATIC DIAGRAM

---

## APPENDIX E – USER'S MANUAL

---

## APPENDIX F – BLOCK DIAGRAM

---