


Transmitter Audio Frequency Response – Pre-emphasis


SPECIFICATION: FCC CFR 2.1047 (a)

Tx FREQUENCY: 156.475 MHz 12.5 kHz Channel Spacing

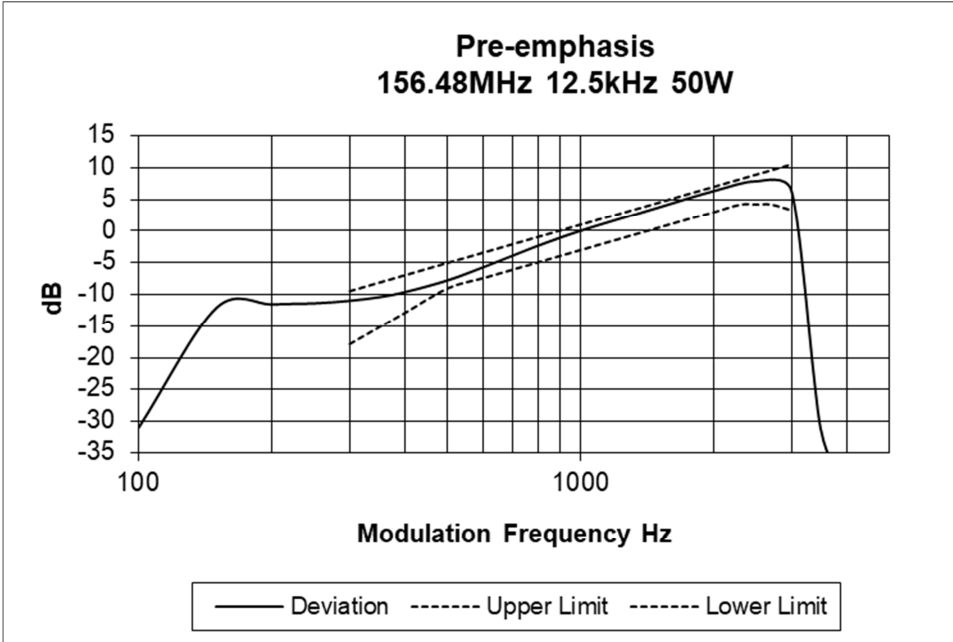

SPECIFICATION: FCC CFR 2.1047 (a)


Tx FREQUENCY: 157.2 MHz 12.5 kHz Channel Spacing

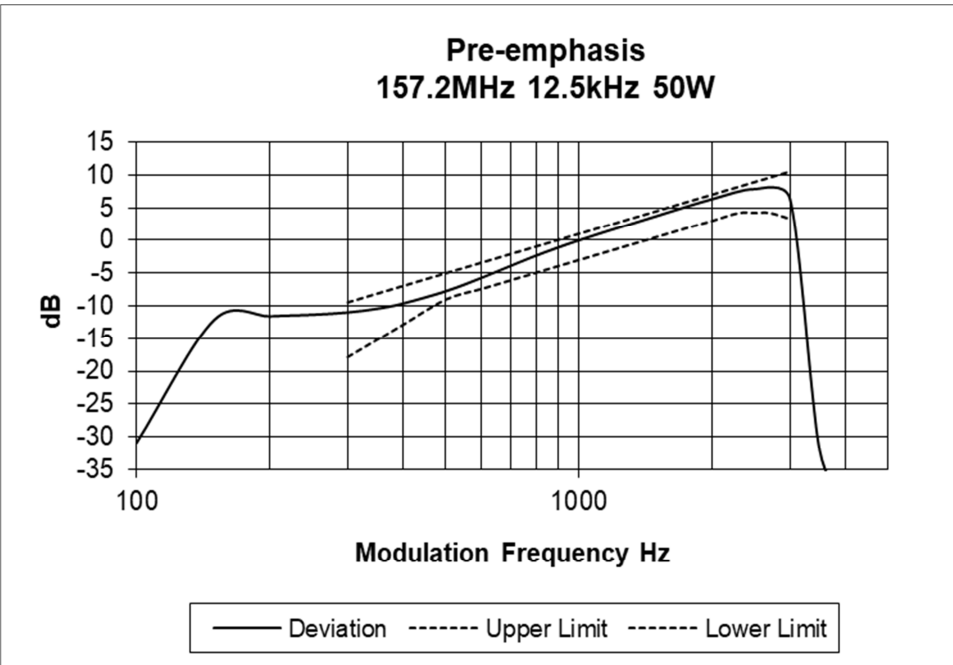

Transmitter Audio Frequency Response – Pre-emphasis


SPECIFICATION: FCC CFR 2.1047 (a)

Tx FREQUENCY: 161.9 MHz 12.5 kHz Channel Spacing

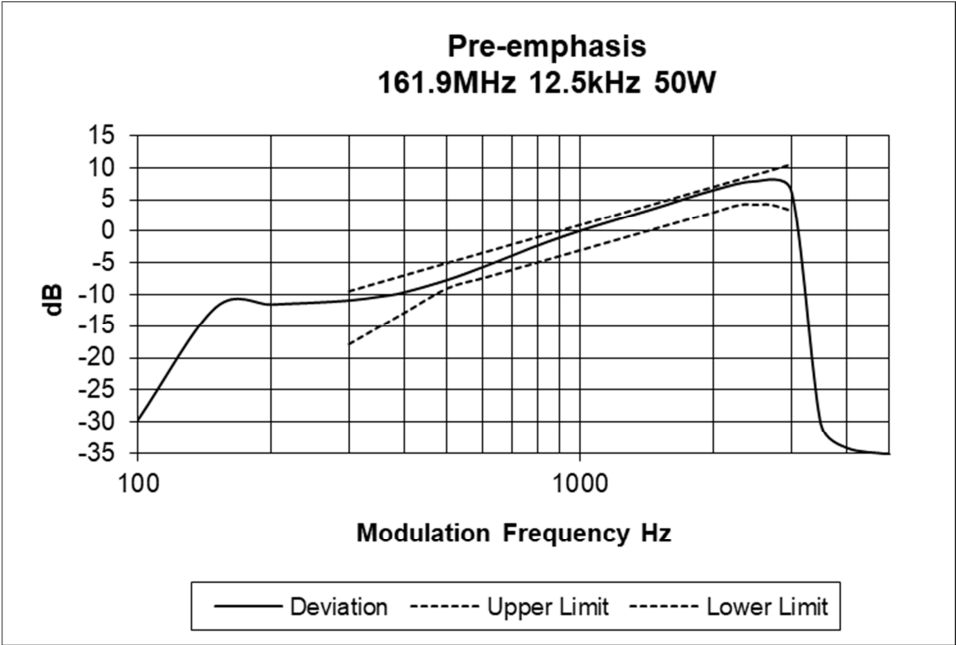

SPECIFICATION: FCC CFR 2.1047 (a)


Tx FREQUENCY: 162.1 MHz 12.5 kHz Channel Spacing

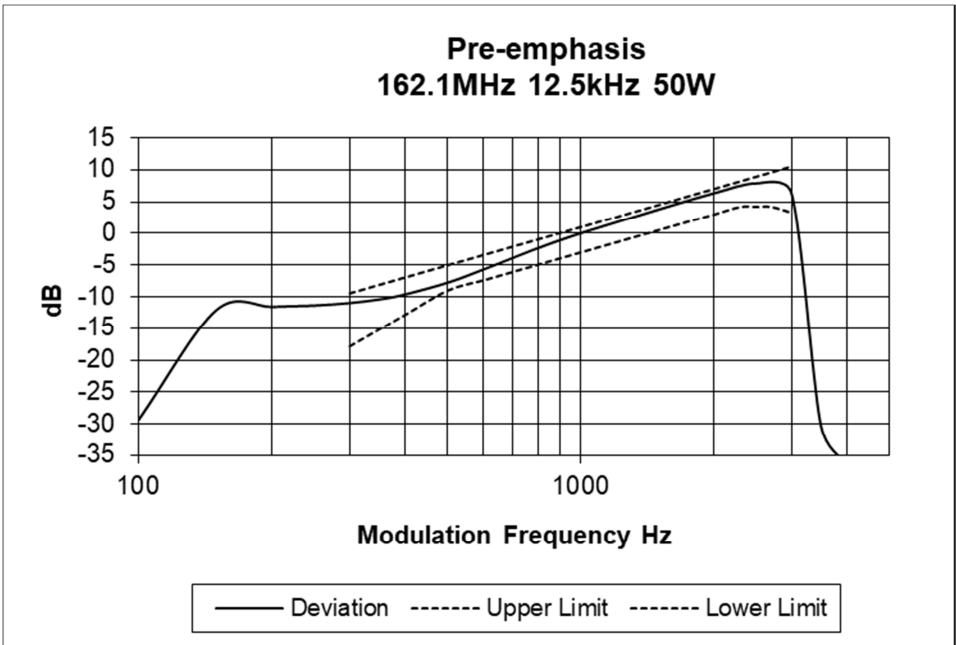

Transmitter Audio Frequency Response – Pre-emphasis

SPECIFICATION: FCC CFR 2.1047 (a)

Tx FREQUENCY: 173.3 MHz 12.5 kHz Channel Spacing

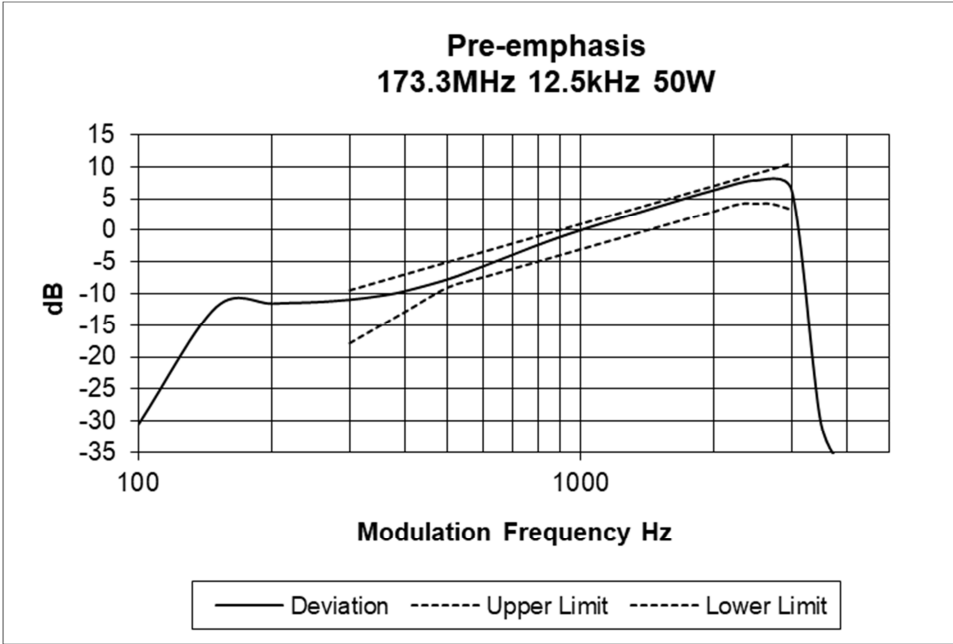

TRANSMITTER MODULATION LIMITING

SPECIFICATION: FCC 47 CFR 2.1047 (b)

GUIDE: ANSI C63.26 5.3.2

MEASUREMENT PROCEDURE:

1. Refer Annex A for Equipment set up.
2. An audio input tone of 1000 Hz was applied with the level set to obtain 60% of maximum deviation. This was used as the 0 dB reference point.
3. The modulation response was measured at four audio frequencies while increasing the input level in 5dB steps.
4. Additionally the level used to measure sideband spectrum (occupied bandwidth) was included in the level sweep.
5. Measurements were made for both Positive and Negative Deviation.

MEASUREMENT RESULTS:

See the plots on the following pages for 12.5 kHz channel spacing.


LIMIT CLAUSE: TIA/EIA-603E 1.3.4.4

MEASUREMENT UNCERTAINTY: $\pm 1.5 \%$

SPECIFICATION: FCC CFR 2.1047 (b)

Tx FREQUENCY: 148.1 MHz


12.5 kHz Channel Spacing

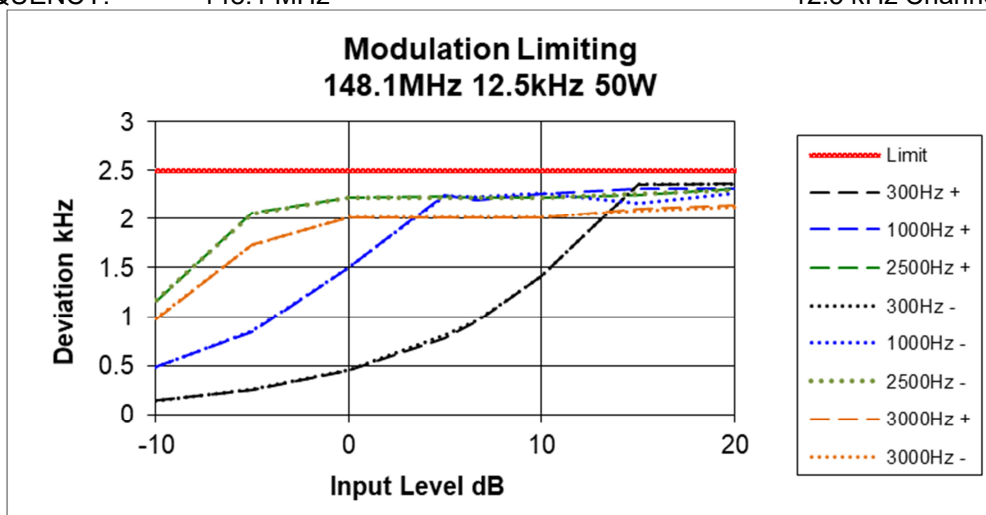

Transmitter Modulation Limiting

SPECIFICATION: FCC CFR 2.1047 (b)

Tx FREQUENCY: 150.8 MHz 12.5 kHz Channel Spacing

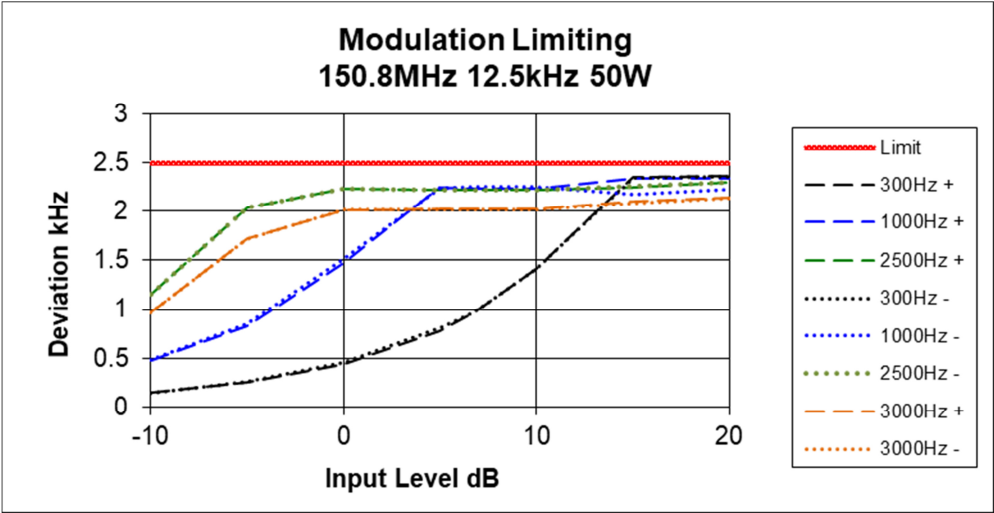

SPECIFICATION: FCC CFR 2.1047 (b)

Tx FREQUENCY: 156.475 MHz 12.5 kHz Channel Spacing

