Occupied Bandwidth and Spectrum Masks

FFSK, 1200 bps

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 479.9 MHz 100 W 12.5 kHz Channel Spacing

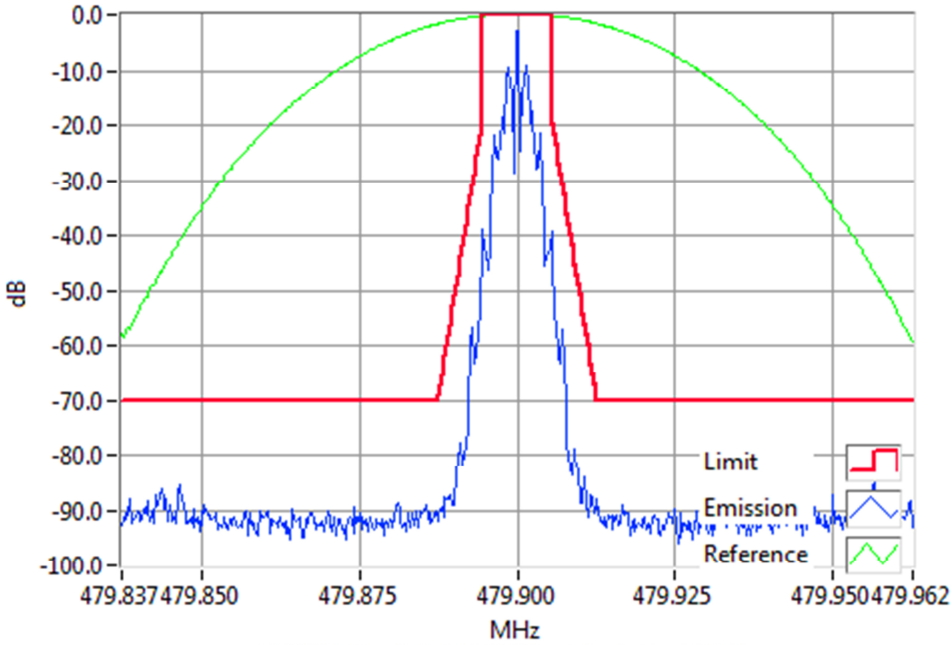

FFSK1200 479.9000MHz Mask D 100W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 479.9/ MHz 10 W 12.5 kHz Channel Spacing

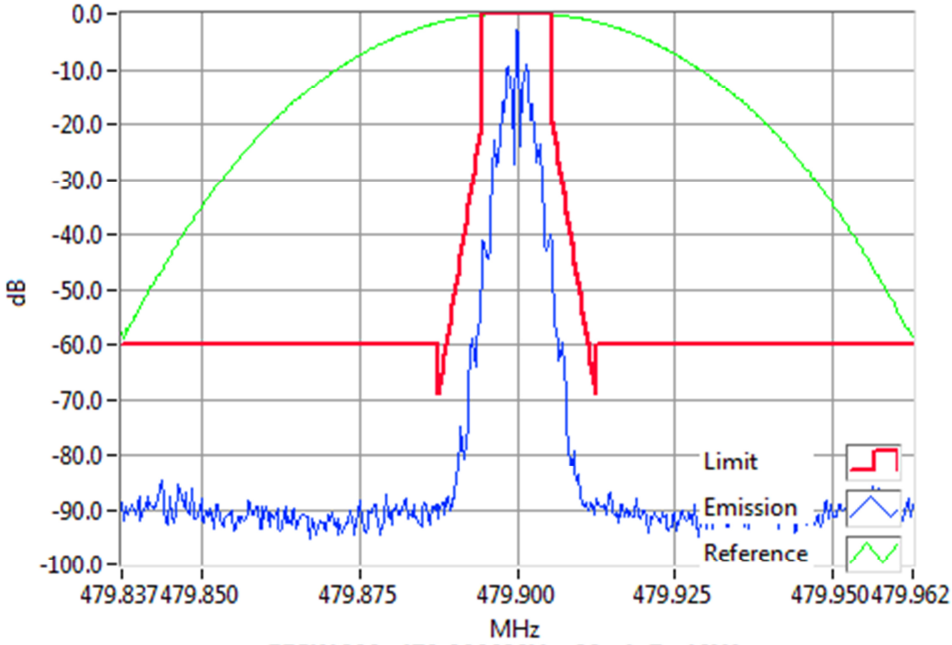

FFSK1200 479.9000MHz Mask D 10W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

DMR

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 440.1 MHz 100 W 12.5 kHz Channel Spacing

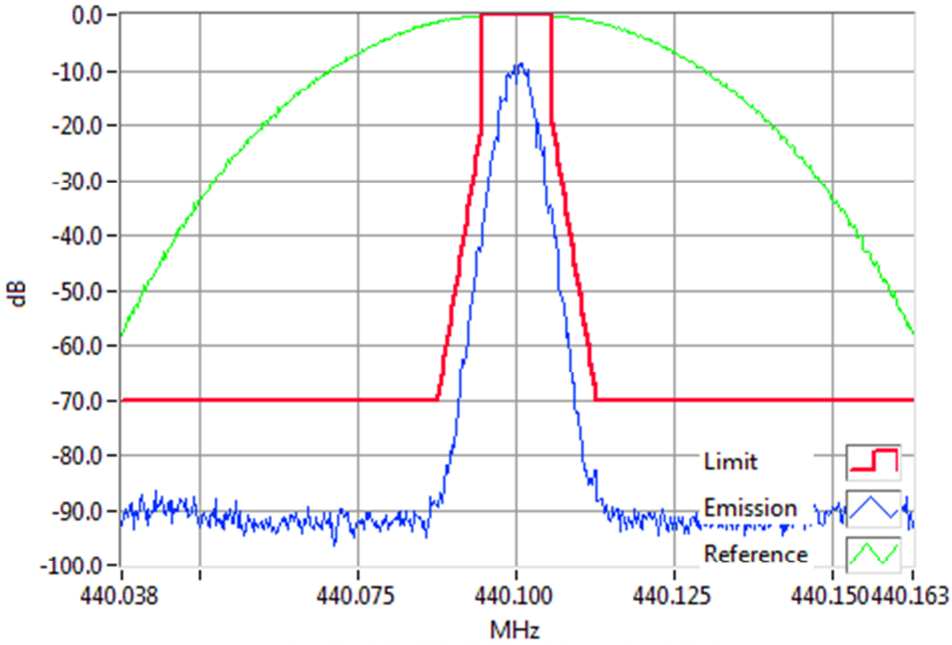

DMR 440.1000MHz Mask D 100W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 440.1 MHz 10 W 12.5 kHz Channel Spacing

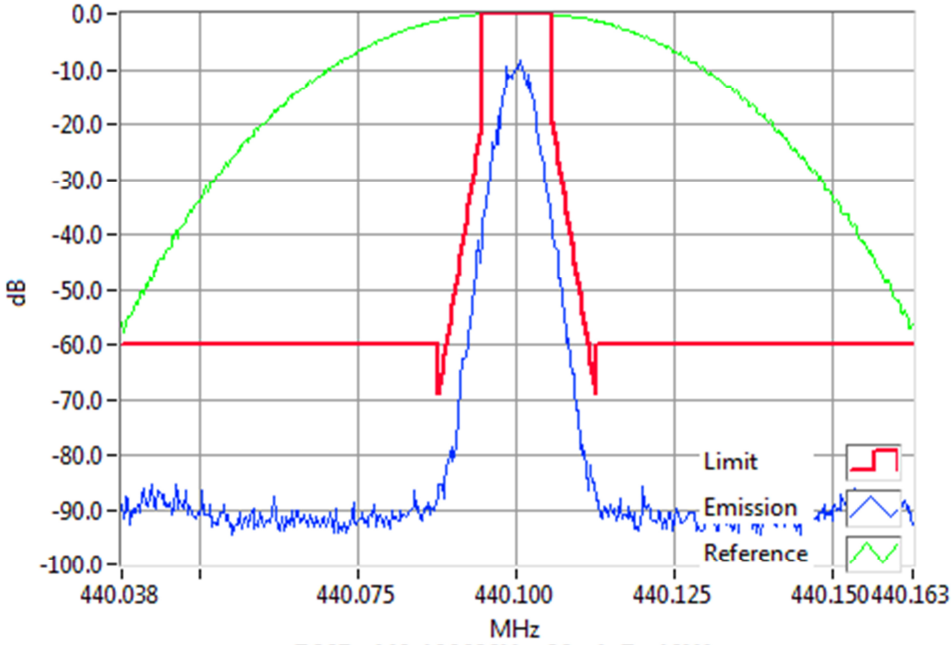

DMR 440.1000MHz Mask D 10W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass