

**FCC CFR47 PART 15 SUBPART C  
CERTIFICATION**



**TEST REPORT**

**FOR**

**TOUCH SCREEN PLATFORM WITH  
802.11A/B COMBO WIRELESS LAN MODULE  
(WITH OPTION CO-WORKING WITH BLUETOOTH CARD)**

**MODEL: PP350X-XXXXXX**

**FCC ID: CJ6UPP350WL2**

**REPORT NUMBER: 02U1584-1**

**ISSUE DATE: JANUARY 23, 2003**

*Prepared for*  
**TOSHIBA CORPORATION DIGITAL MEDIA NETWORK COMPANY  
2-9, SUEHIRO-CHO, OME,  
TOKYO, 198-8710  
JAPAN**

*Prepared by*  
**COMPLIANCE CERTIFICATION SERVICES  
561F MONTEREY ROAD,  
MORGAN HILL, CA 95037, USA  
TEL: (408) 463-0885  
FAX: (408) 463-0888**

## TABLE OF CONTENTS

<b>1. TEST RESULT CERTIFICATION .....</b>	<b>3</b>
<b>2. CROSS REFERENCES TO OTHER APPLICABLE REPORTS .....</b>	<b>4</b>
<b>3. DESCRIPTION OF EUT.....</b>	<b>4</b>
<b>4. TEST METHODOLOGY.....</b>	<b>5</b>
<b>5. FACILITIES AND ACCREDITATION.....</b>	<b>5</b>
5.1. <i>FACILITIES AND EQUIPMENT.....</i>	5
5.2. <i>LABORATORY ACCREDITATIONS AND LISTINGS.....</i>	5
5.3. <i>TABLE OF ACCREDITATIONS AND LISTINGS.....</i>	6
<b>6. CALIBRATION AND UNCERTAINTY .....</b>	<b>7</b>
6.1. <i>MEASURING INSTRUMENT CALIBRATION .....</i>	7
6.2. <i>MEASUREMENT UNCERTAINTY.....</i>	7
6.3. <i>TEST AND MEASUREMENT EQUIPMENT.....</i>	8
<b>7. SETUP OF EQUIPMENT UNDER TEST.....</b>	<b>9</b>
<b>8. APPLICABLE RULES.....</b>	<b>11</b>
<b>9. TEST SETUP, PROCEDURE AND RESULT .....</b>	<b>13</b>
9.1. <i>UNDESIRABLE EMISSIONS – RADIATED MEASUREMENTS .....</i>	13
9.2. <i>WLAN Operating in the 2.4 GHz Band with Co-located Bluetooth .....</i>	14
9.3. <i>WLAN Operating in the 5.8 GHz Band with Co-located Bluetooth .....</i>	25
9.4. <i>Bluetooth with Co-located WLAN Operating in the 5.2 GHz Band .....</i>	26
9.5. <i>Bluetooth with Co-located WLAN Operating in the 5.8 GHz Band .....</i>	31
<b>10. SETUP PHOTOS.....</b>	<b>36</b>

## 1. TEST RESULT CERTIFICATION

**COMPANY NAME:** TOSHIBA CORPORATION DIGITAL MEDIA NETWORK COMPANY  
2-9, SUEHIRO-CHO, OME  
TOKYO, 198-8710 JAPAN

**EUT DESCRIPTION:** TOUCH SCREEN PLATFORM WITH 802.11A/B COMBO  
WIRELESS LAN MODULE (WITH OPTION CO-WORKING WITH  
BLUETOOTH CARD)

**MODEL:** PP350X-XXXXX

**DATE TESTED:** DECEMBER 12, 2002 – JANUARY 17, 2003

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC Part 15 Subpart C, 15.247	NO NON-COMPLIANCE NOTED


Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note 1:** This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document.

**Note 2:** This report documents the collocation performance of the two transceiver modules; Section 2 below lists the cross reference to other reports that document the performance of the separate modules and the laptop as a digital device.

**Note 3:** The 2.4 and 5.8 GHz bands are applicable to this report; another bands of operation (5.2 GHz) is documented in a separate report

Approved & Released For CCS By:



MIKE HECKROTTE  
CHIEF ENGINEER  
COMPLIANCE CERTIFICATION SERVICES

Tested By:



NEELESH RAJ  
EMC ENGINEER  
COMPLIANCE CERTIFICATION SERVICES

## 2. CROSS REFERENCES TO OTHER APPLICABLE REPORTS

The Bluetooth Transmitter Module has a limited module approval under FCC ID: CJ6UPA3232BT.

The WLAN Transmitter Module has a limited module approval under FCC ID CJ6UPA3233WL.

The performance of the Laptop, with respect to AC Mains Line Conducted emissions and radiated emissions as a Digital Device, is documented by Toshiba Document Number OFD-H3395 dated October 18, 2002.

## 3. DESCRIPTION OF EUT

The EUT is a Touch Screen Platform with 802.11a/B Combo Wireless Lan Module (With Option Co-Working with Bluetooth Card).

Touch Screen Platform With 802.11a/b Combo Wireless LAN Transceiver Module with an optional co-located Bluetooth Transceiver Module.

The WLAN module is an 802.11 a/b wireless Spread Spectrum transceiver. This unit provides a power output of +18.2 dBm (66 mW) in the 2400 – 2483.5 MHz band and +23.1 dBm (204 mW) in the 5725 – 5850 MHz band . It is designed to use two dual band inverted F film antennas. A single antenna is used for transmit. Both antennas are used for receive diversity. The highest intended antenna gain is 4.8 dBi.

The CSR Bluetooth module is a wireless Frequency Hopping Spread Spectrum transceiver that operates from 2402 – 2480 MHz. This unit provides a maximum power output of +1.4 dBm (1.38 mW) and is connected to an internal film antenna with a 1.22 dBi gain.

## 4. TEST METHODOLOGY

Conducted and radiated testing were performed according to the procedures documented on chapter 13 of ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, and 15.407.

## 5. FACILITIES AND ACCREDITATION

### 5.1. FACILITIES AND EQUIPMENT

The open area test sites and conducted measurement facilities used to collect the radiated data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

Receiving equipment (i.e., receiver, analyzer, quasi-peak adapter, pre-selector) and LISNs conform to CISPR specifications for "Radio Interference Measuring Apparatus and Measurement Methods," Publication 16.

### 5.2. LABORATORY ACCREDITATIONS AND LISTINGS

The test facilities used to perform radiated and conducted emissions tests are accredited by National Voluntary Laboratory Accreditation Program for the specific scope of accreditation under Lab Code: 200065-0 to perform Electromagnetic Interference tests according to FCC PART 15 AND CISPR 22 requirements. No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government. In addition, the test facilities are listed with Federal Communications Commission (reference no: 31040/SIT (1300B3) and 31040/SIT (1300F2)).

### 5.3. TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	NVLAP*	FCC Part 15, CISPR 22, AS/NZS 3548, IEC 61000-4-2, IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5, IEC 61000-4-6, IEC 61000-4-8, IEC 61000-4-11, CNS 13438	 200065-0
USA	FCC	3/10 meter Open Area Test Sites to perform FCC Part 15/18 measurements	 1300
Japan	VCCI	CISPR 22 Two OATS and one conducted Site	 R-1014, R-619, C-640
Norway	NEMKO	EN50081-1, EN50081-2, EN50082-1, EN50082-2, IEC61000-6-1, IEC61000-6-2, EN50083-2, EN50091-2, EN50130-4, EN55011, EN55013, EN55014-1, EN55104, EN55015, EN61547, EN55022, EN55024, EN61000-3-2, EN61000-3-3, EN60945, EN61326-1	 ELA 117
Norway	NEMKO	EN60601-1-2 and IEC 60601-1-2, the Collateral Standards for Electro-Medical Products. MDD, 93/42/EEC, AIMD 90/385/EEC	 ELA-171
Taiwan	BSMI	CNS 13438	 SL2-IN-E-1012
Canada	Industry Canada	RSS210 Low Power Transmitter and Receiver	 IC2324 A,B,C, and F

\* No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government.

## 6. CALIBRATION AND UNCERTAINTY

### 6.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### 6.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

<b>Radiated Emission</b>	
30MHz – 200 MHz	+/- 3.3dB
200MHz – 1000MHz	+4.5/-2.9dB
1000MHz – 2000MHz	+4.6/-2.2dB
<b>Power Line Conducted Emission</b>	
150kHz – 30MHz	+/-2.9

Any results falling within the above values are deemed to be marginal.

### 6.3. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST AND MEASUREMENT EQUIPMENT LIST				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due Date
Spectrum Analyzer	HP	8566B	3014A06685	6/1/03
Spectrum Display	HP	85662A	2152A03066	6/1/03
Quasi-Peak Detector	HP	85650A	3145A01654	6/1/03
Spectrum Analyzer	HP	8593EM	3710A00205	6/11/03
Preamplifier (1 - 26.5GHz)	Miteq	NSP10023988	646456	4/26/03
Horn Antenna (1 - 18GHz)	EMCO	3115	6717	1/31/03
Horn Antenna (18 - 26.5GHz)	ARA	MWH 1826/B	1049	11/7/03
High Pass Filter (4.57GHz)	FSY Microwave	FM-4570-9SS	003	N.C.R.



## 7. SETUP OF EQUIPMENT UNDER TEST

### SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Device Type	Manufacturer	Model	Serial Number	FCC ID
Touch Screen Platform	Toshiba	Portege 3500	92027903	Prototype / EUT
AC Adapter	Toshiba	PA3083U-1ACA	1230257G	DoC


### I/O CABLES

Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	US115	Unshielded	2 m	Integrated with AC Adapter

### TEST SETUP

The Bluetooth transceiver in the EUT is operated in a standalone mode by a utility program. The WLAN transceiver in the EUT is also operated in a standalone mode by a utility program.

**SETUP DIAGRAM FOR TRANSMITTER TESTS**

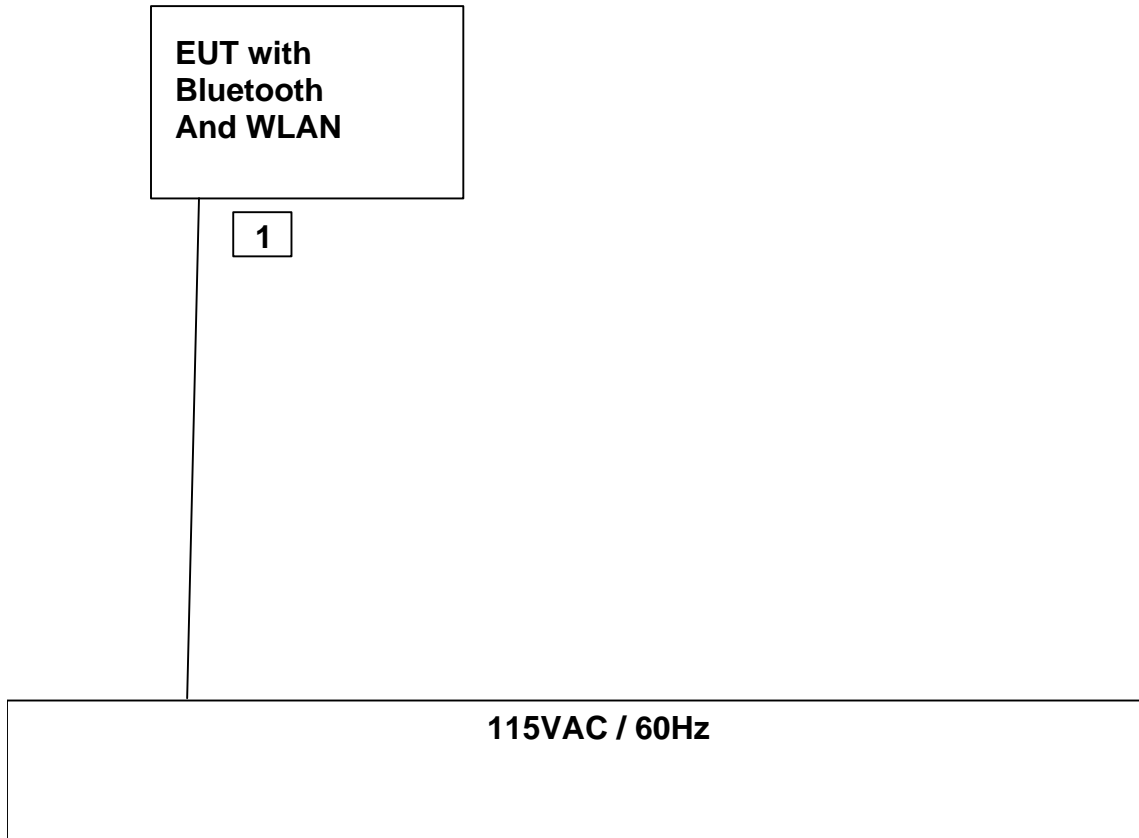

## 8. APPLICABLE RULES

### §15.247 (c)- SPURIOUS EMISSIONS

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### §15.205- RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

**§15.209- RADIATED EMISSION LIMITS**

(a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

(b) In the emission table above, the tighter limit applies at the band edges.

Frequency Range (MHz)	Field Strength (uV/m at 3 m)	Field Strength (dBuV/m at 3 m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

## 9. TEST SETUP, PROCEDURE AND RESULT

### 9.1. UNDESIRABLE EMISSIONS – RADIATED MEASUREMENTS

#### TEST SETUP

The EUT is placed on the wooden table. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4/1992.

Both transmitters in the EUT are set to transmit simultaneously in a continuous mode.

#### TEST PROCEDURE

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz within restricted bands, the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

For tests with the WLAN operating in the 2.4 GHz band the spectrum from 30 MHz to 26 GHz is investigated.

For tests with the WLAN operating in the 5.8 GHz band the spectrum from 30 MHz to 40 GHz is investigated.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The frequency span is set small enough to easily differentiate between broadcast stations, intermittent ambient signals and EUT emissions. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the suspected signal. Measurements were made with the antenna polarized in both the vertical and the horizontal positions.

#### TEST RESULTS


Worst-case results are reported. No non-compliance noted:

## 9.2. WLAN Operating in the 2.4 GHz Band with Co-located Bluetooth


### LOWER BAND EDGE WITH CO-LOCATED BLUETOOTH AND WLAN OPERATING SIMULTANEOUSLY AT THEIR LOW FREQUENCY CHANNELS

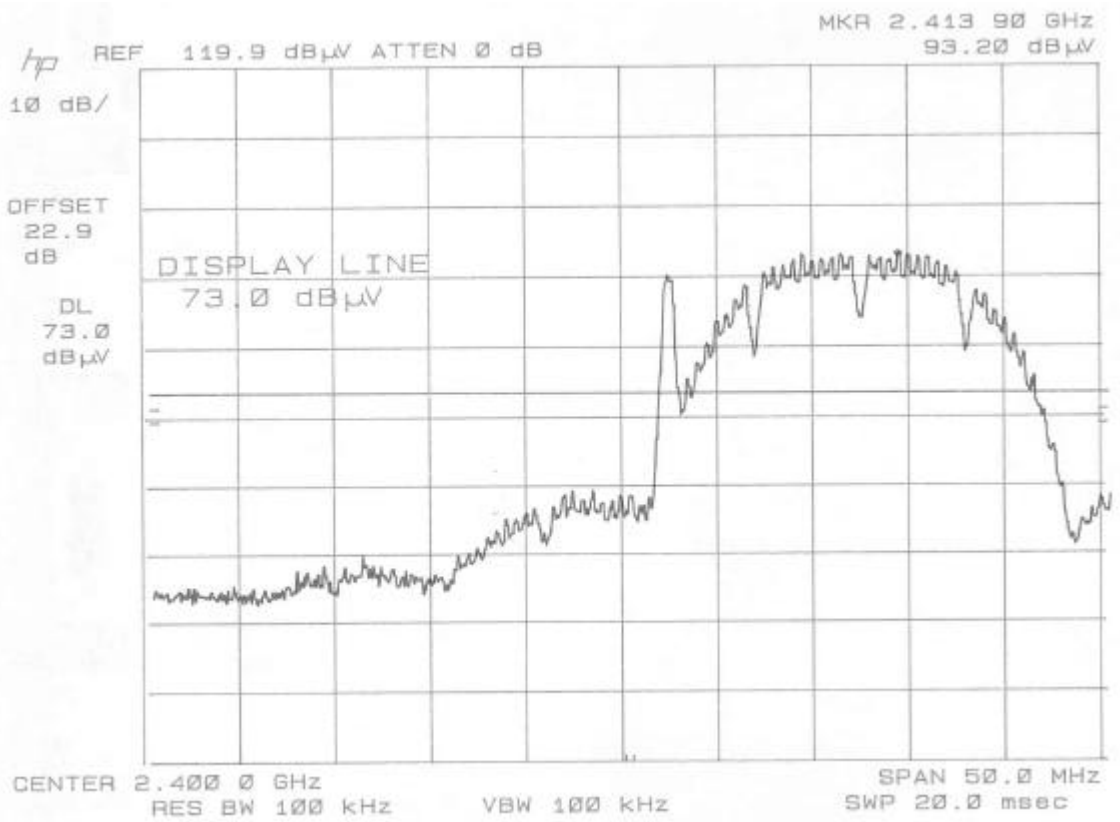

**WORST CASE LOWER RESTRICTED BAND WITH CO-LOCATED BLUETOOTH AND WLAN OPERATING SIMULTANEOUSLY AT THEIR LOW FREQUENCY CHANNELS - VERTICAL PEAK**

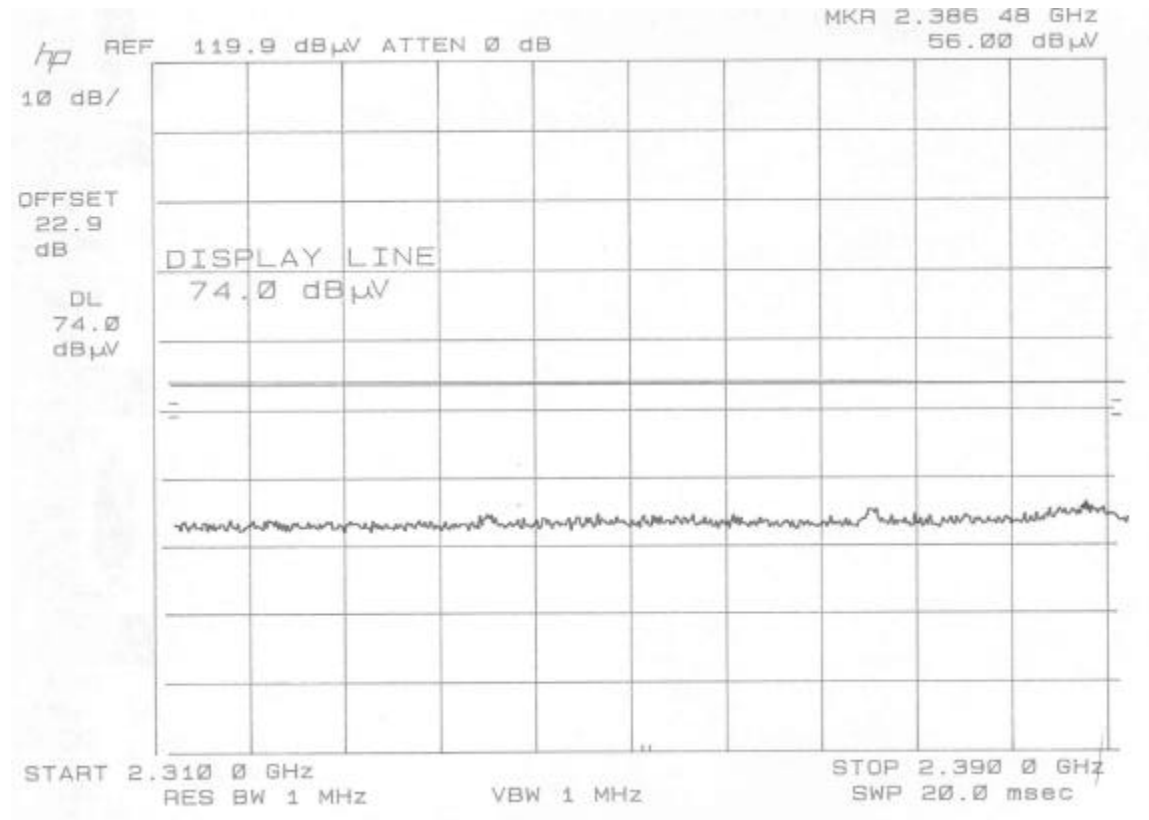


**WORST CASE LOWER RESTRICTED BAND WITH CO-LOCATED BLUETOOTH AND WLAN OPERATING SIMULTANEOUSLY AT THEIR LOW FREQUENCY CHANNELS - VERTICAL AVERAGE**

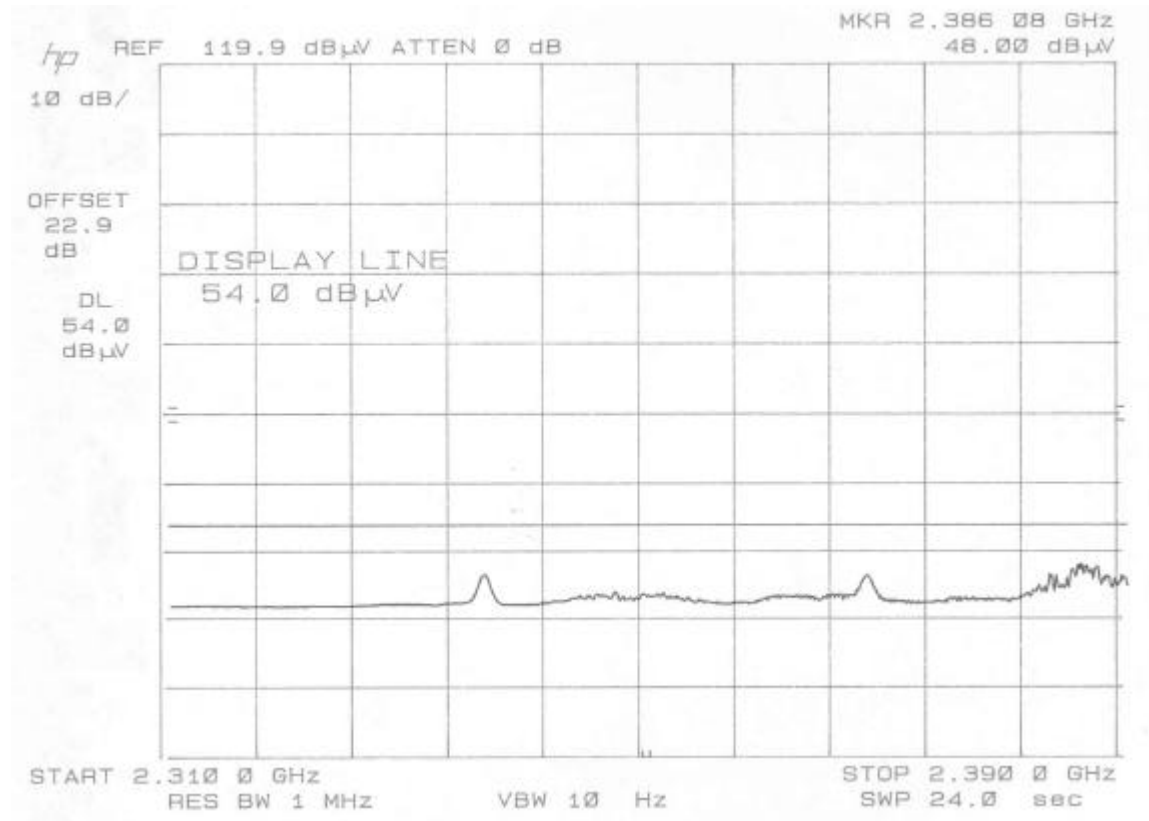





**WORST CASE LOWER RESTRICTED BAND WITH CO-LOCATED BLUETOOTH AND WLAN  
OPERATING SIMULTANEOUSLY AT THEIR LOW FREQUENCY CHANNELS - HORIZONTAL PEAK**

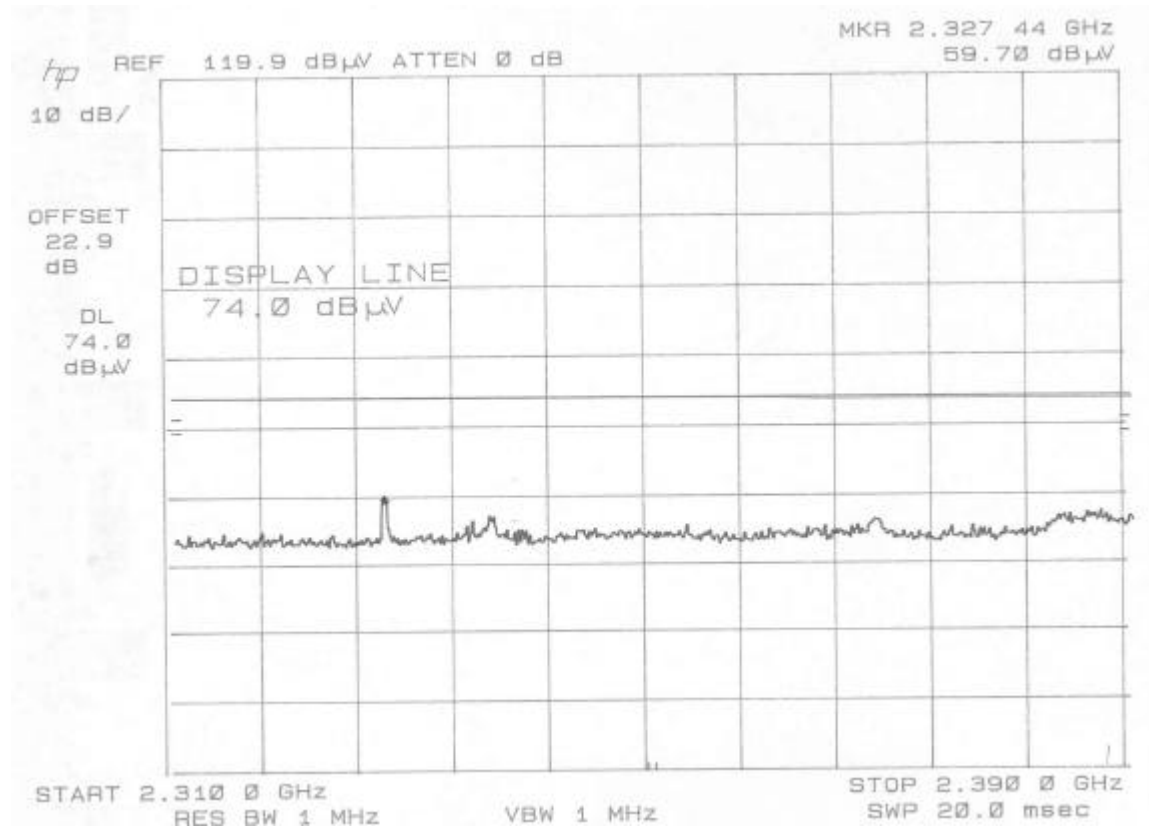


**WORST CASE LOWER RESTRICTED BAND WITH CO-LOCATED BLUETOOTH AND WLAN OPERATING SIMULTANEOUSLY AT THEIR LOW FREQUENCY CHANNELS – HORIZONTAL AVERAGE**

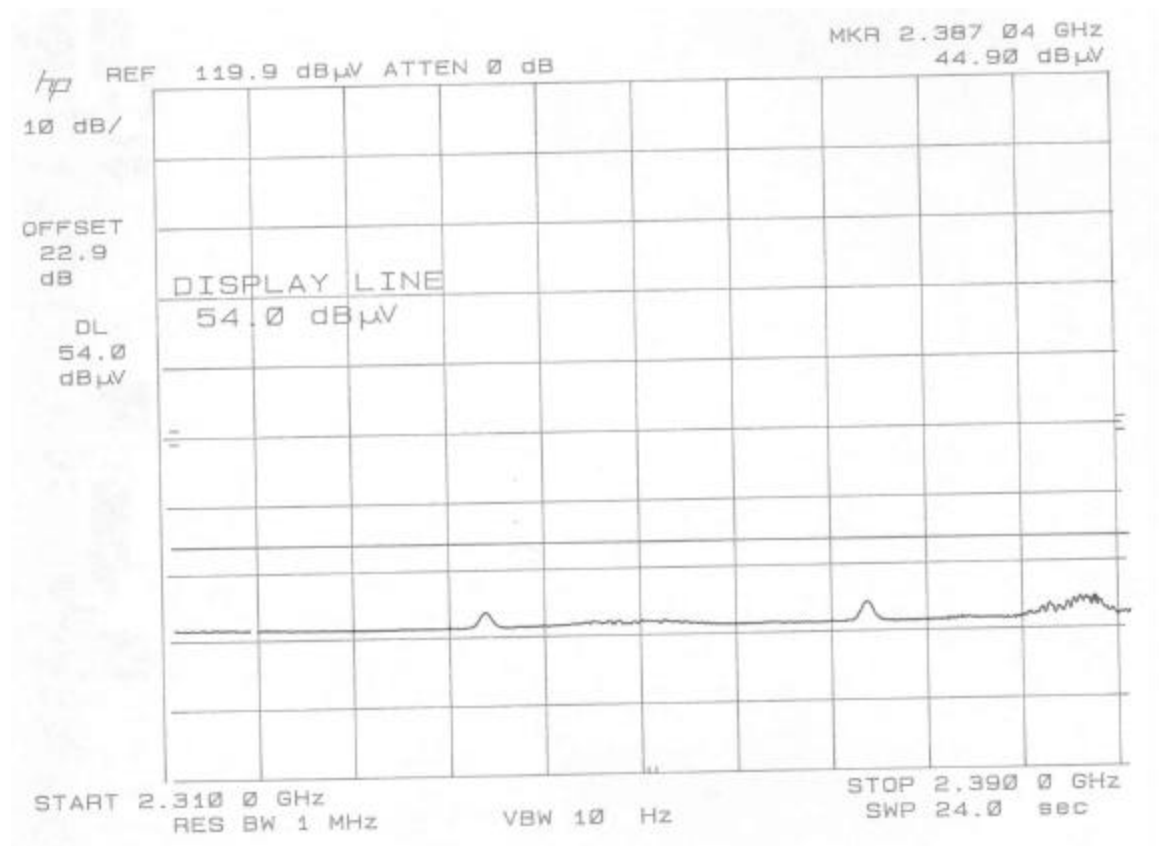


**UPPER BAND EDGE WITH CO-LOCATED BLUETOOTH AND WLAN OPERATING SIMULTANEOUSLY AT THEIR HIGH FREQUENCY CHANNELS**

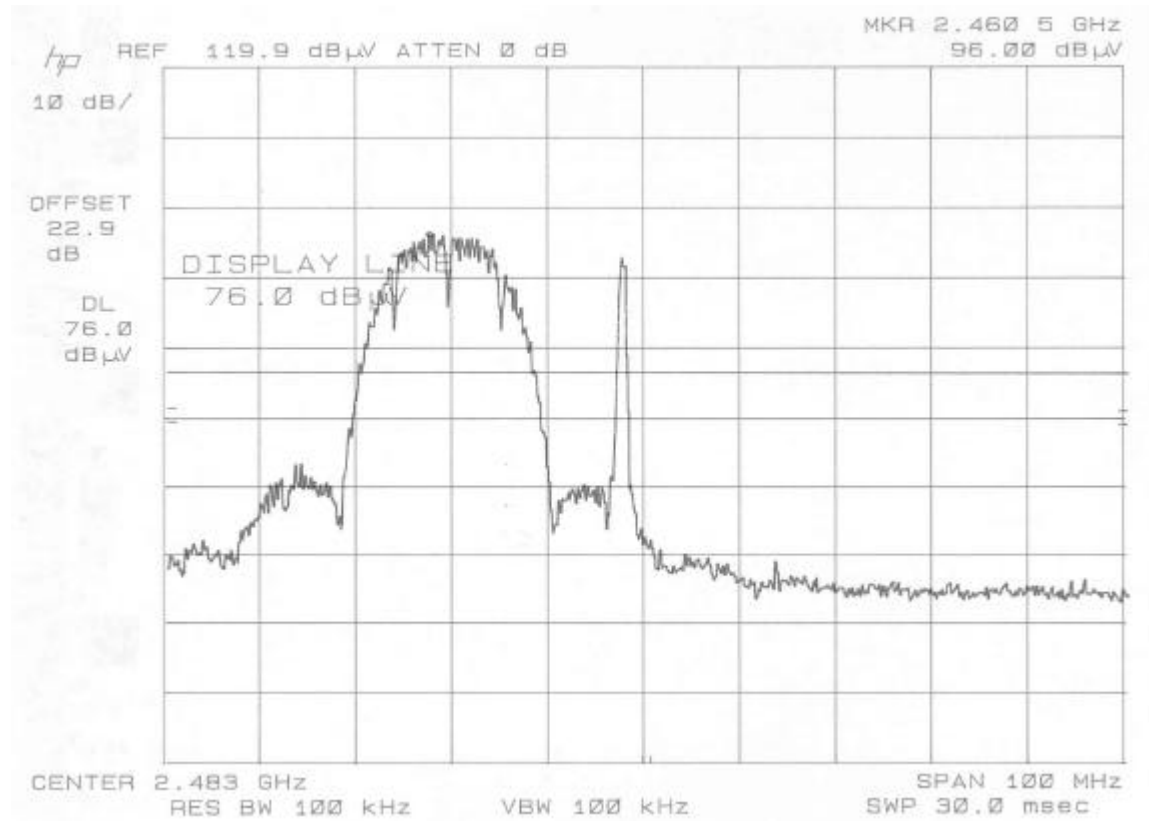


**WORST CASE UPPER RESTRICTED BAND WITH CO-LOCATED BLUETOOTH AND WLAN OPERATING SIMULTANEOUSLY AT THEIR HIGH FREQUENCY CHANNELS - VERTICAL PEAK**

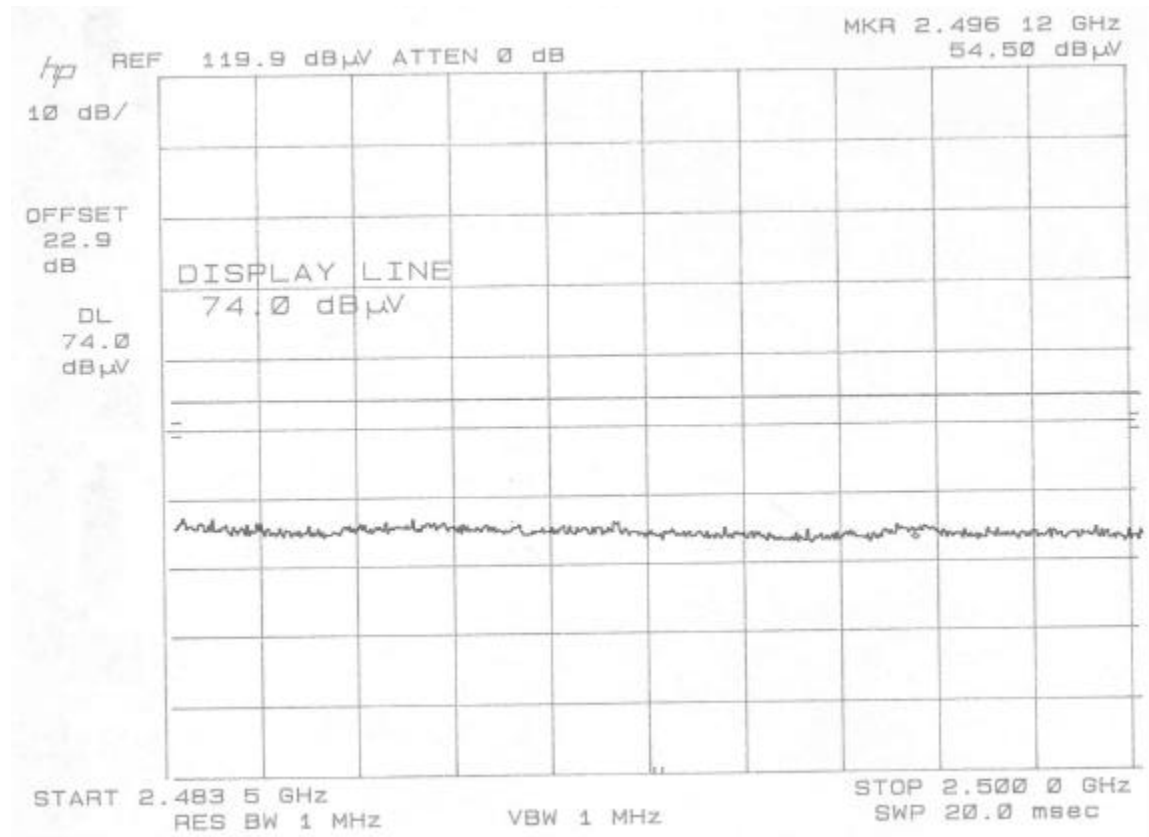


**WORST CASE UPPER RESTRICTED BAND WITH CO-LOCATED BLUETOOTH AND WLAN OPERATING SIMULTANEOUSLY AT THEIR HIGH FREQUENCY CHANNELS - VERTICAL AVERAGE**

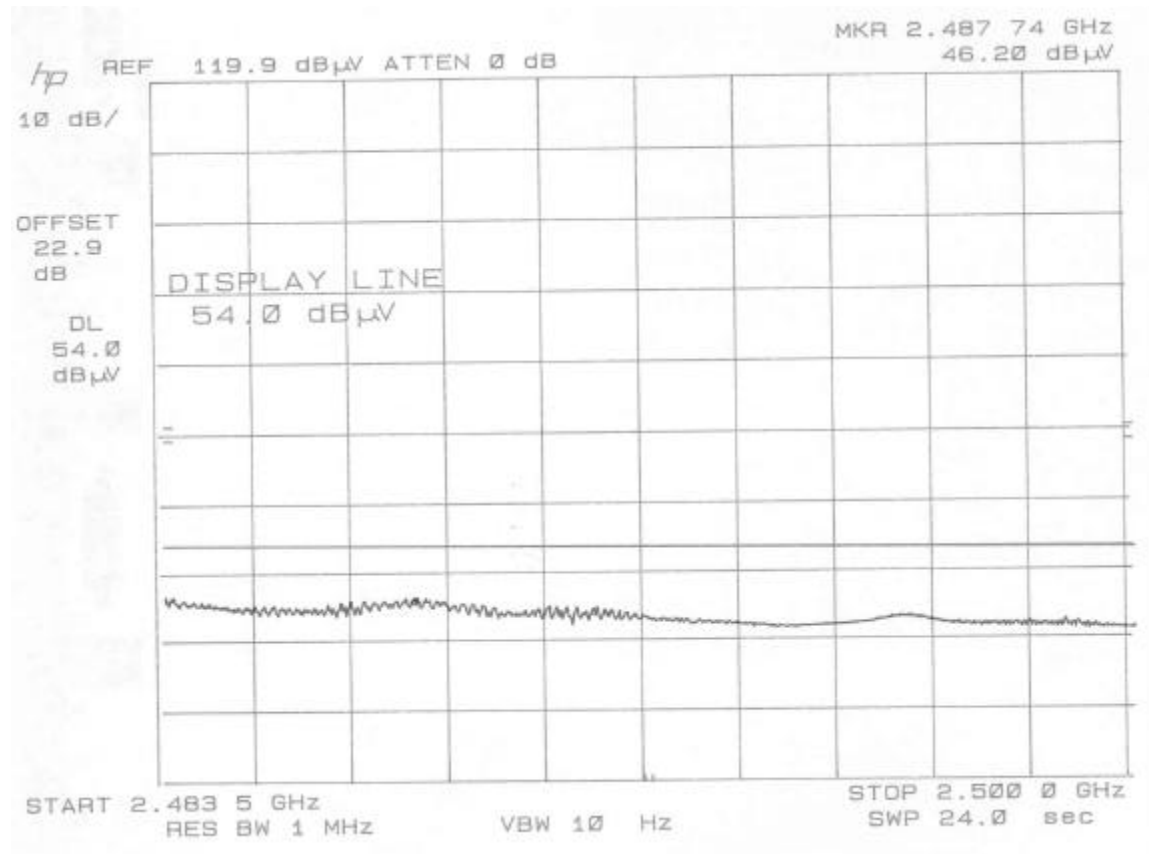

**WORST CASE UPPER RESTRICTED BAND WITH CO-LOCATED BLUETOOTH AND WLAN OPERATING SIMULTANEOUSLY AT THEIR HIGH FREQUENCY CHANNELS – HORIZONTAL PEAK**

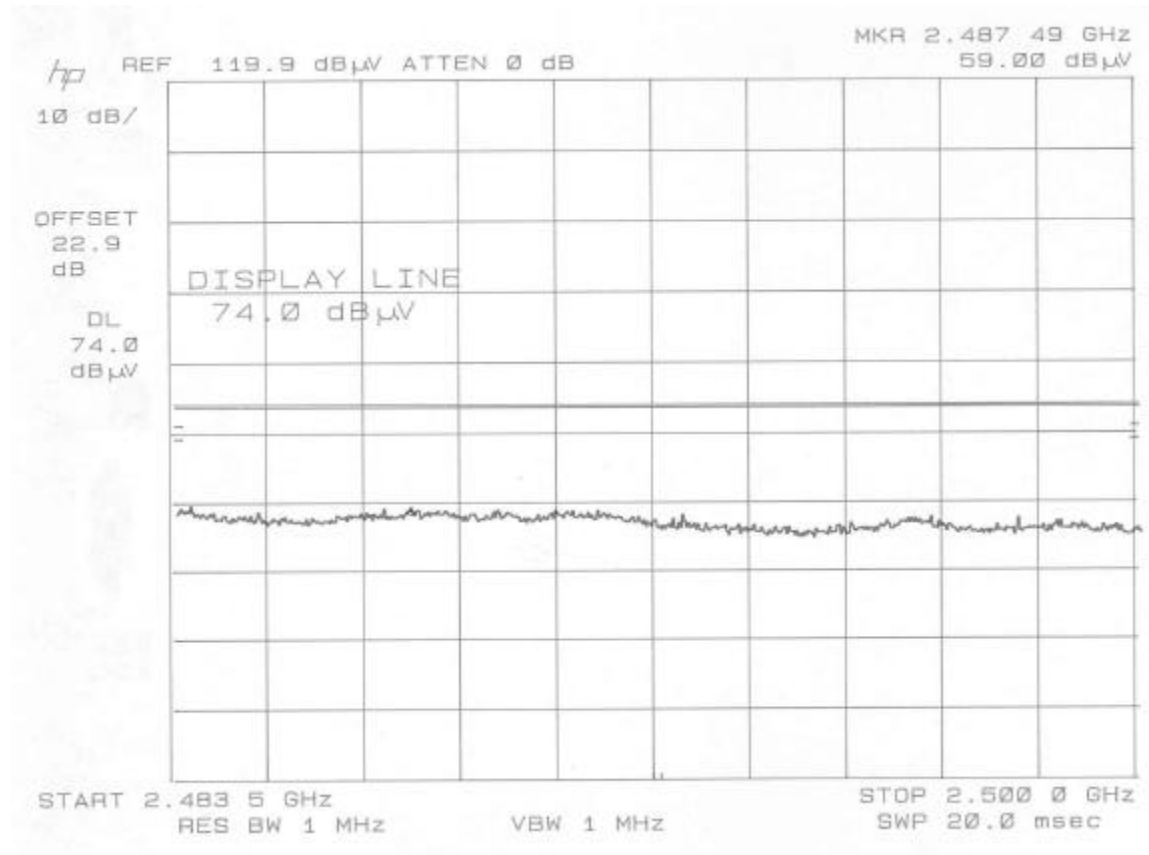

**WORST CASE UPPER RESTRICTED BAND WITH CO-LOCATED BLUETOOTH AND WLAN OPERATING SIMULTANEOUSLY AT THEIR HIGH FREQUENCY CHANNELS – HORIZONTAL AVERAGE**

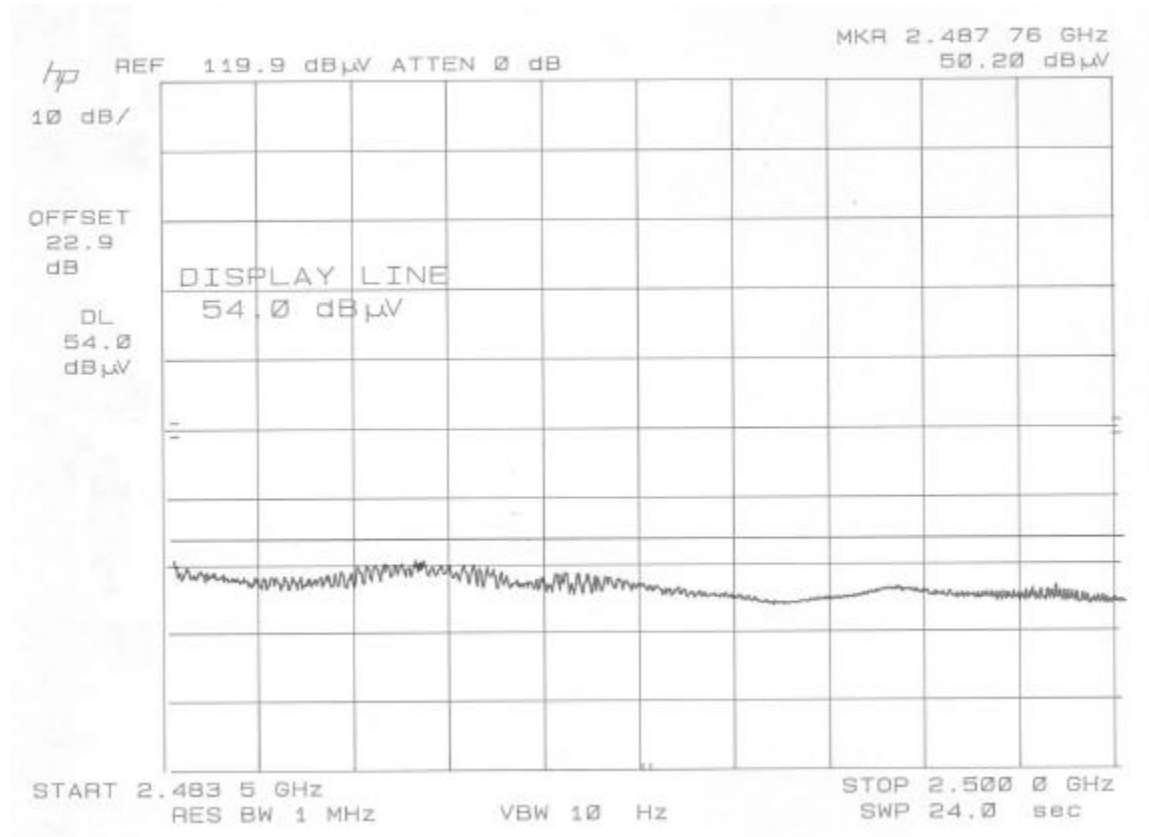

**WORST CASE SPURIOUS RADIATED EMISSIONS WITH WLAN OPERATING IN 2.4 GHZ BAND AND CO-LOCATED BLUETOOTH**

Description of Test:		Spurious Radiated Emissions									
Project Number:		02U1644									
Date:		12/12/02									
Test Engineer:		Chin Pang									
Site:		Chin Pang									
Company:		Toshiba									
EUT Description:		Touch Screen / Bluetooth / WLAN									
Test Configuration:		EUT / AC Adapter / Laptop									
Mode of Operation:		WLAN transmitting at maximum power, Mid channel 2437 MHz									
		Bluetooth transmitting at maximum power, 2437 MHz									
Specification Distance:		3.0	meters								
Actual Distance:		3.0	meters	Cable Length:	16.0	feet					
Freq GHz	Pol V/H	Det	SA dBuV	Dist dB	AF dB/m	Preamp dB	Filter dB	Cable dB	Field dBuV/m	Limit dBuV/m	Margin dB
4.874	V	Peak	39.9	0.0	33.9	36.0	1.0	6.1	44.9	74.0	-29.1
4.874	V	Avg	37.0	0.0	33.9	36.0	1.0	6.1	42.0	54.0	-12.0
4.874	H	Peak	38.1	0.0	33.9	36.0	1.0	6.1	43.1	74.0	-30.9
4.874	H	Avg	33.0	0.0	33.9	36.0	1.0	6.1	38.0	54.0	-16.0
7.312	V	Peak	42.5	0.0	37.2	36.3	1.0	7.8	52.1	74.0	-21.9
7.312	V	Avg	37.6	0.0	37.2	36.3	1.0	7.8	47.2	54.0	-6.8
7.312	H	Peak	40.1	0.0	37.2	36.3	1.0	7.8	49.7	74.0	-24.3
7.312	H	Avg	33.3	0.0	37.2	36.3	1.0	7.8	42.9	54.0	-11.1
Note 1: No other spurious emissions were detected above the system noise floor.											



### 9.3. WLAN Operating in the 5.8 GHz Band with Co-located Bluetooth

#### WORST CASE WLAN SPURIOUS RADIATED EMISSIONS WITH WLAN OPERATING IN 5.8 GHZ BAND AND CO-LOCATED BLUETOOTH

01/17/03 High Frequency Measurement  
Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: NEELESH RAJ  
Project #: 02U1584  
Company: TOSHIBA  
EUT Descr.: TOUCH SCREEN LAPTOP PC WITH CSR BT AND 802.11 a/b COMBO WIRELESS LAN MODULE  
EUT M/N: NIMBUS  
Test Target: FCC  
Mode Oper: TX

**Test Equipment:**

Cable (feet)	EMCO Horn 1-18GHz	Pre-amplifier 1-26GHz	Spectrum Analyzer	Horn > 18GHz
15	T73; S/N: 6717	Miteq NSP2600-44	8566B Analyzer	


**Peak Measurements:** 1 MHz Resolution Bandwidth  
1MHz Video Bandwidth

**Average Measurements:** 1 MHz Resolution Bandwidth  
10Hz Video Bandwidth


f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes	
<b>WLAN</b>																
Worst case harmonic in 5.8 band: 5.745 GHz, Max Power + Blue tooth ON @ 2.480 GHz, Max Power																
11.489	3.3	58.4	46.6	39.7	9.3	-36.0	-9.5	1.0	62.9	51.1	74.0	54.0	-11.1	-2.9	V	
11.489	3.3	52.1	39.3	39.7	9.3	-36.0	-9.5	1.0	56.6	43.8	74.0	54.0	-17.4	-10.2	H	
<b>BLUETOOTH</b>																
Worst case Bluetooth harmonic: 2.441 GHz, Max Power + WLAN ON at 5.745GHz, Max Power																
4.882	3.3	53.3	53.3	34.0	5.8	-36.1	-9.5	1.0	48.5	48.5	74.0	54.0	-25.5	-5.5	V	
4.882	3.3	52.0	52.0	34.0	5.8	-36.1	-9.5	1.0	47.2	47.2	74.0	54.0	-26.8	-6.8	H	
7.323	3.3	51.2	51.2	37.2	7.3	-36.3	-9.5	1.0	51.0	51.0	74.0	54.0	-23.0	-3.0	V	
7.323	3.3	50.0	50.0	37.2	7.3	-36.3	-9.5	1.0	49.8	49.8	74.0	54.0	-24.2	-4.2	H	
**FOR BLUETOOTH THE PEAK LEVEL IS LESS THEN THE AVERAGE LIMIT**																
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit			
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit			
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit			
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit			
CL	Cable Loss					HPF	High Pass Filter									

### 9.4. Bluetooth with Co-located WLAN Operating in the 5.2 GHz Band


**WORST CASE LOWER RESTRICTED BAND WITH BLUETOOTH OPERATING AT THE LOWEST FREQUENCY AND CO-LOCATED WLAN OPERATING SIMULTANEOUSLY AT 5.32 GHz - HORIZONTAL AVERAGE**

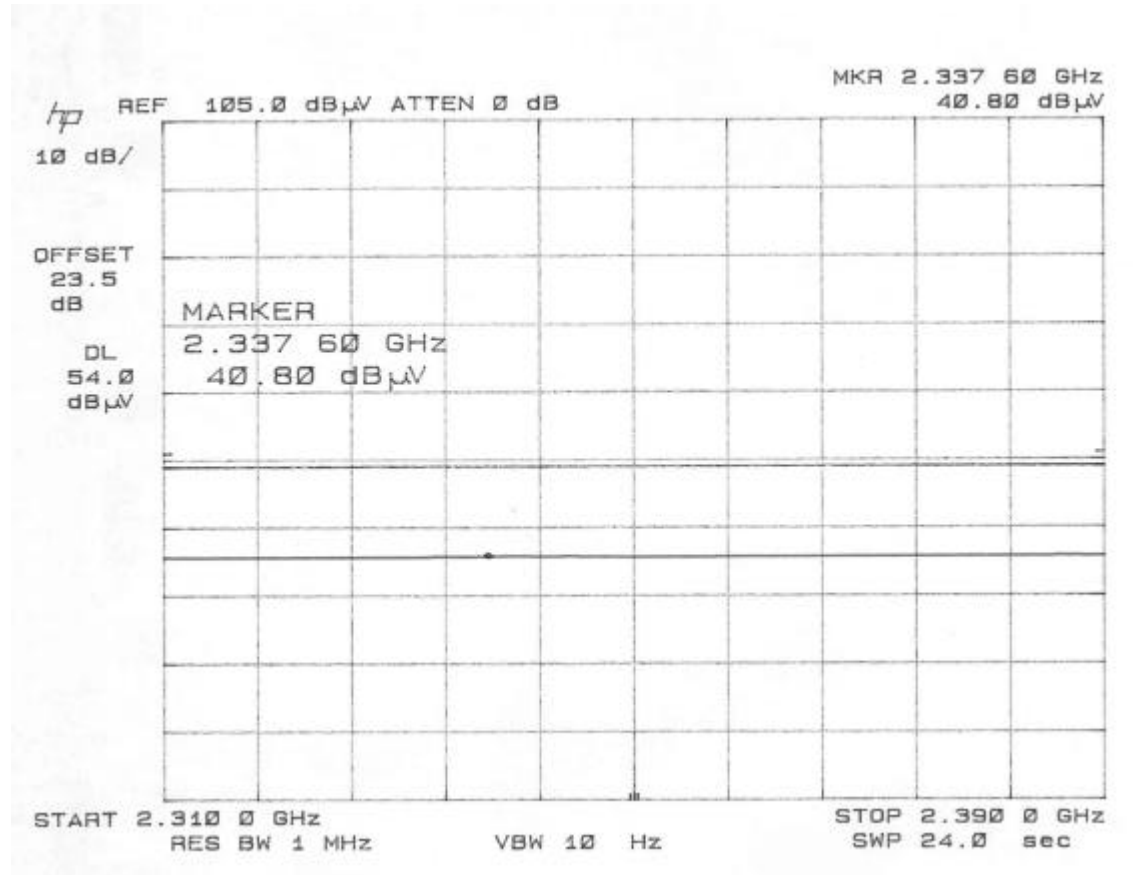


**WORST CASE LOWER RESTRICTED BAND WITH BLUETOOTH OPERATING AT THE LOWEST FREQUENCY AND CO-LOCATED WLAN OPERATING SIMULTANEOUSLY AT 5.32 GHZ - VERTICAL AVERAGE**

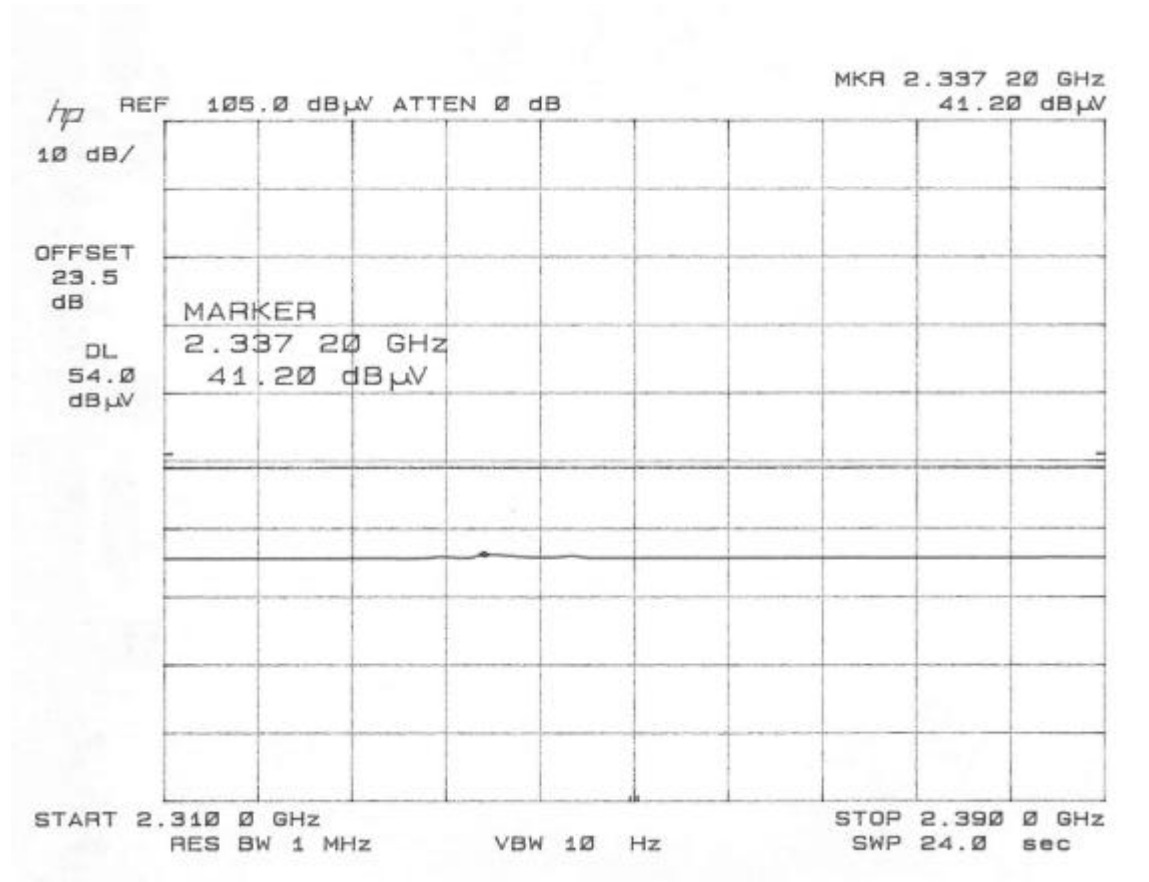

**WORST CASE UPPER RESTRICTED BAND WITH BLUETOOTH OPERATING AT THE HIGHEST FREQUENCY AND CO-LOCATED WLAN OPERATING SIMULTANEOUSLY AT 5.32 GHZ - HORIZONTAL AVERAGE**

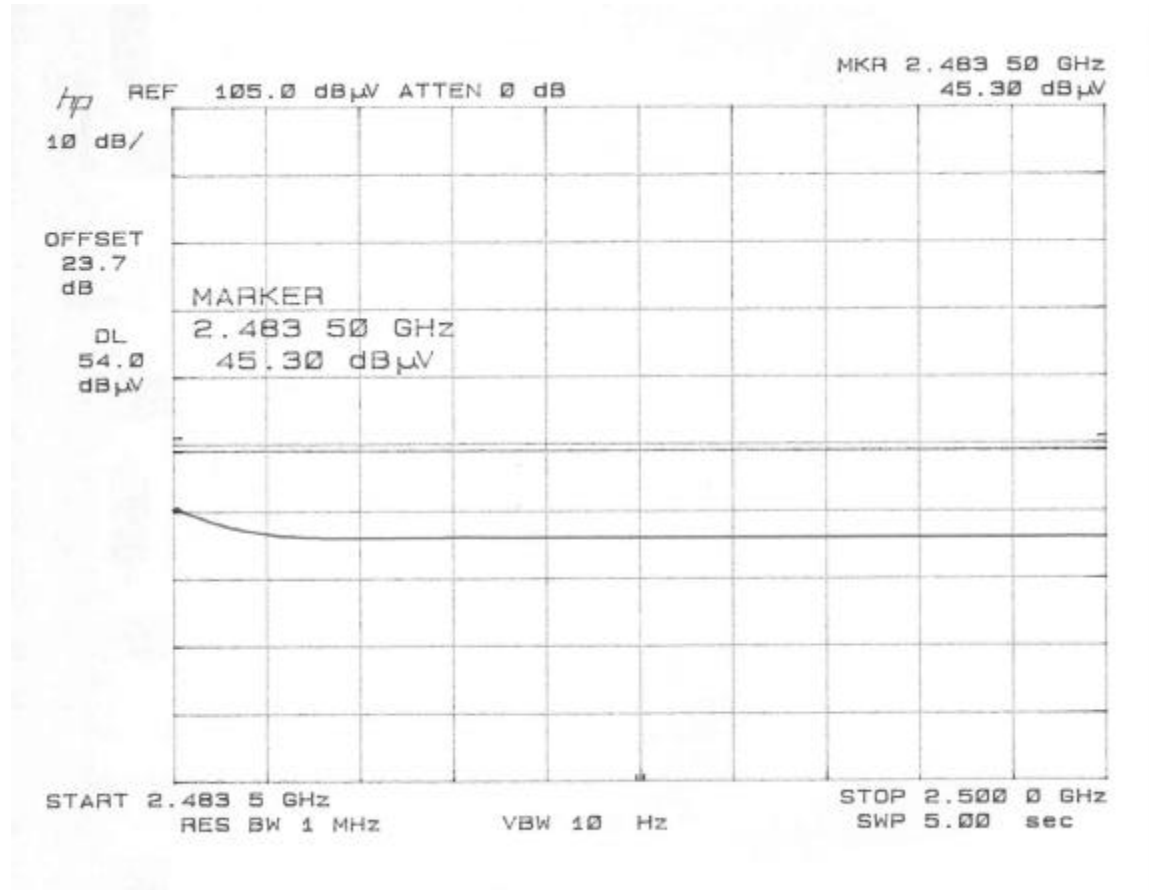

**WORST CASE UPPER RESTRICTED BAND WITH BLUETOOTH OPERATING AT THE HIGHEST FREQUENCY AND CO-LOCATED WLAN OPERATING SIMULTANEOUSLY AT 5.32 GHZ - VERTICAL AVERAGE**

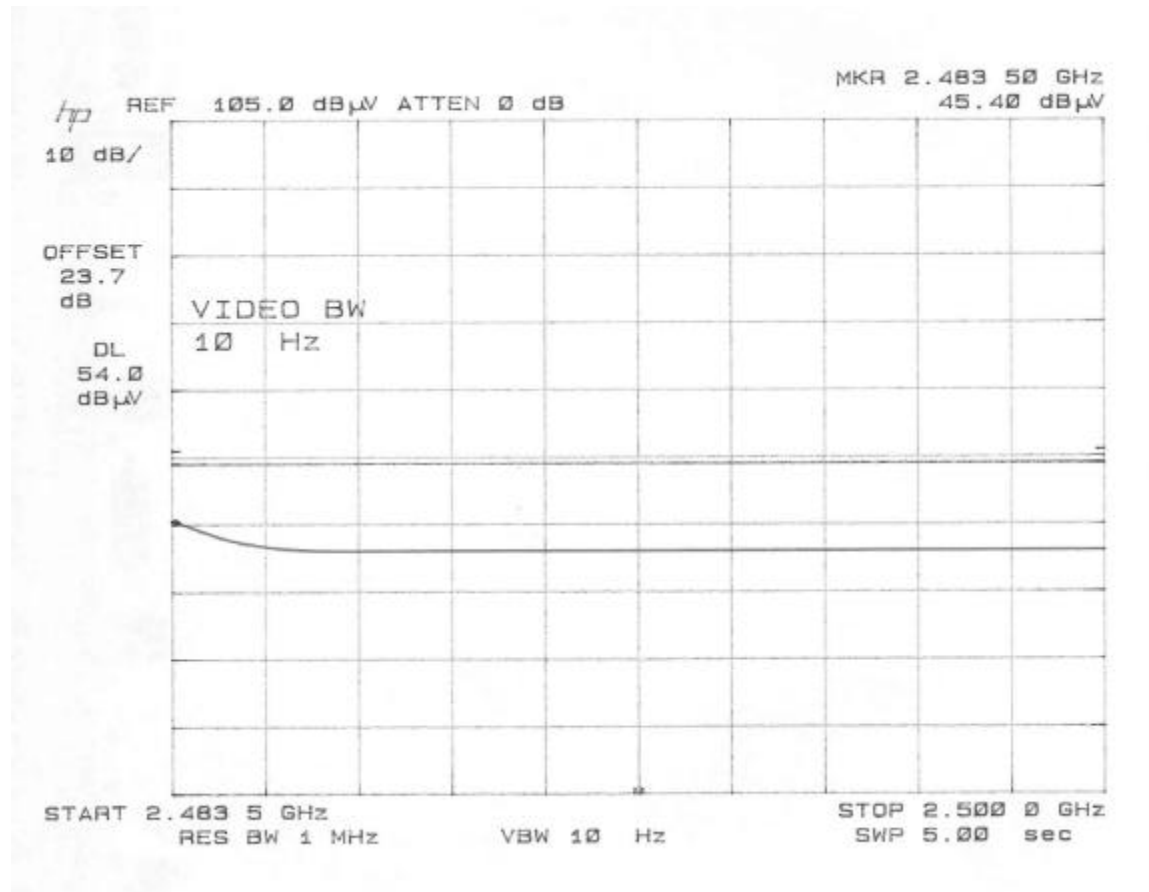

**WORST CASE BLUETOOTH SPURIOUS RADIATED EMISSIONS WITH CO-LOCATED WLAN OPERATING IN THE 5.2 GHZ BAND**

01/17/03 High Frequency Measurement  
Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: NEELESH RAJ  
Project #: 02U1584  
Company: TOSHIBA  
EUT Descrip.: TOUCH SCREEN LAPTOP PC WITH CSR BT AND 802.11 a/b COMBO WIRELESS LAN MODULE  
EUT M/N: NIMBUS  
Test Target: FCC  
Mode Oper: TX

**Test Equipment:**

Cable ( feet )	EMCO Horn 1-18GHz	Pre-amplifier 1-26GHz	Spectrum Analyzer	Horn > 18GHz
15	T73; S/N: 6717	Miteq NSP2600-44	8566B Analyzer	


**Peak Measurements:** 1 MHz Resolution Bandwidth  
1MHz Video Bandwidth

**Average Measurements:** 1 MHz Resolution Bandwidth  
10Hz Video Bandwidth


f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes	
<b>BLUETOOTH</b>																
Worst case Bluetooth harmonic: 2.441 GHz, Max Power + WLAN ON at 5.32GHz, Max Power																
4.882	3.3	53.3	53.3	34.0	5.8	-36.1	-9.5	1.0	48.5	48.5	74.0	54.0	-25.5	-5.5	V	
4.882	3.3	52.0	52.0	34.0	5.8	-36.1	-9.5	1.0	47.2	47.2	74.0	54.0	-26.8	-6.8	H	
7.323	3.3	51.2	51.2	37.2	7.3	-36.3	-9.5	1.0	51.0	51.0	74.0	54.0	-23.0	-3.0	V	
7.323	3.3	50.0	50.0	37.2	7.3	-36.3	-9.5	1.0	49.8	49.8	74.0	54.0	-24.2	-4.2	H	
*THE PEAK LEVEL IS LESS THEN THE AVERAGE LIMIT																
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit			
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit			
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit			
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit			
CL	Cable Loss					HPF	High Pass Filter									

### 9.5. Bluetooth with Co-located WLAN Operating in the 5.8 GHz Band

**WORST CASE LOWER RESTRICTED BAND WITH BLUETOOTH OPERATING AT THE LOWEST FREQUENCY AND CO-LOCATED WLAN OPERATING SIMULTANEOUSLY AT 5.745 GHz – HORIZONTAL AVERAGE**

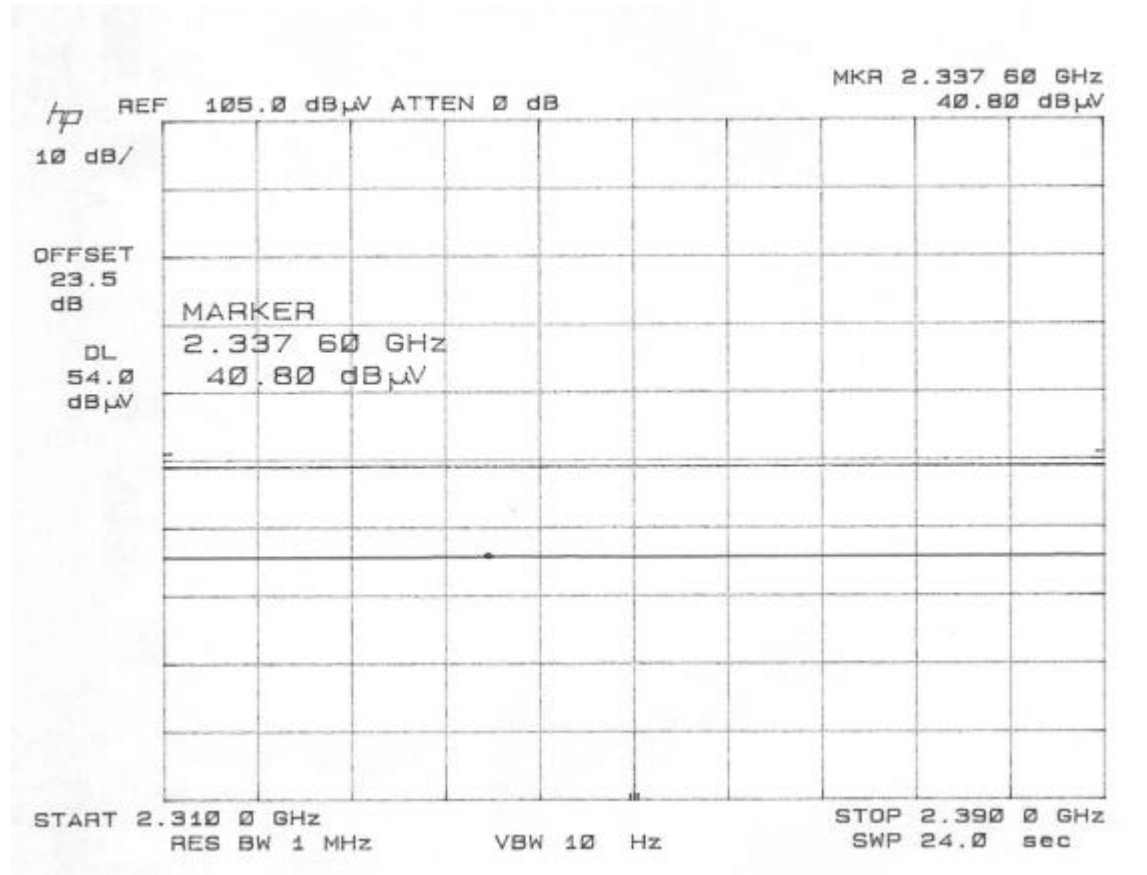


**WORST CASE LOWER RESTRICTED BAND WITH BLUETOOTH OPERATING AT THE LOWEST FREQUENCY AND CO-LOCATED WLAN OPERATING SIMULTANEOUSLY AT 5.745 GHz – VERTICAL AVERAGE**

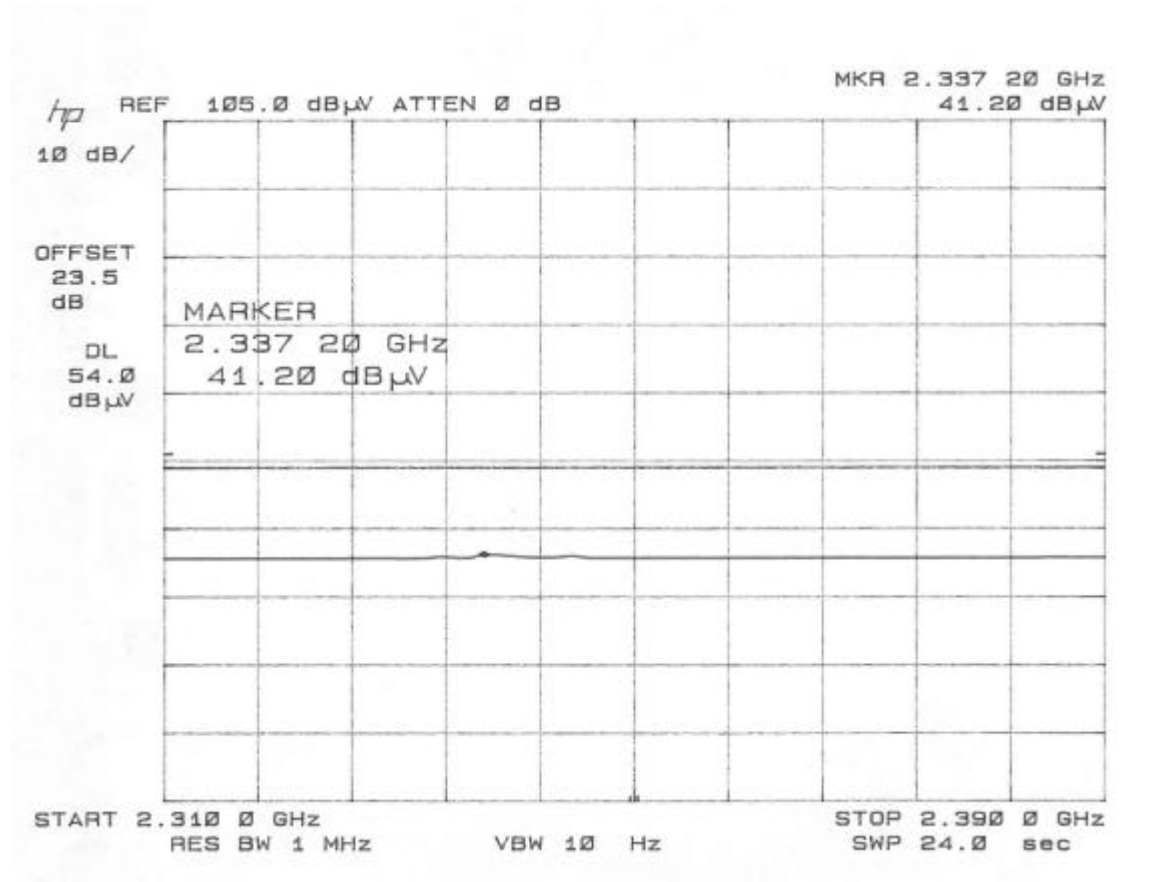




**WORST CASE UPPER RESTRICTED BAND WITH BLUETOOTH OPERATING AT THE HIGHEST FREQUENCY AND CO-LOCATED WLAN OPERATING SIMULTANEOUSLY AT 5.745 GHZ – HORIZONTAL AVERAGE**

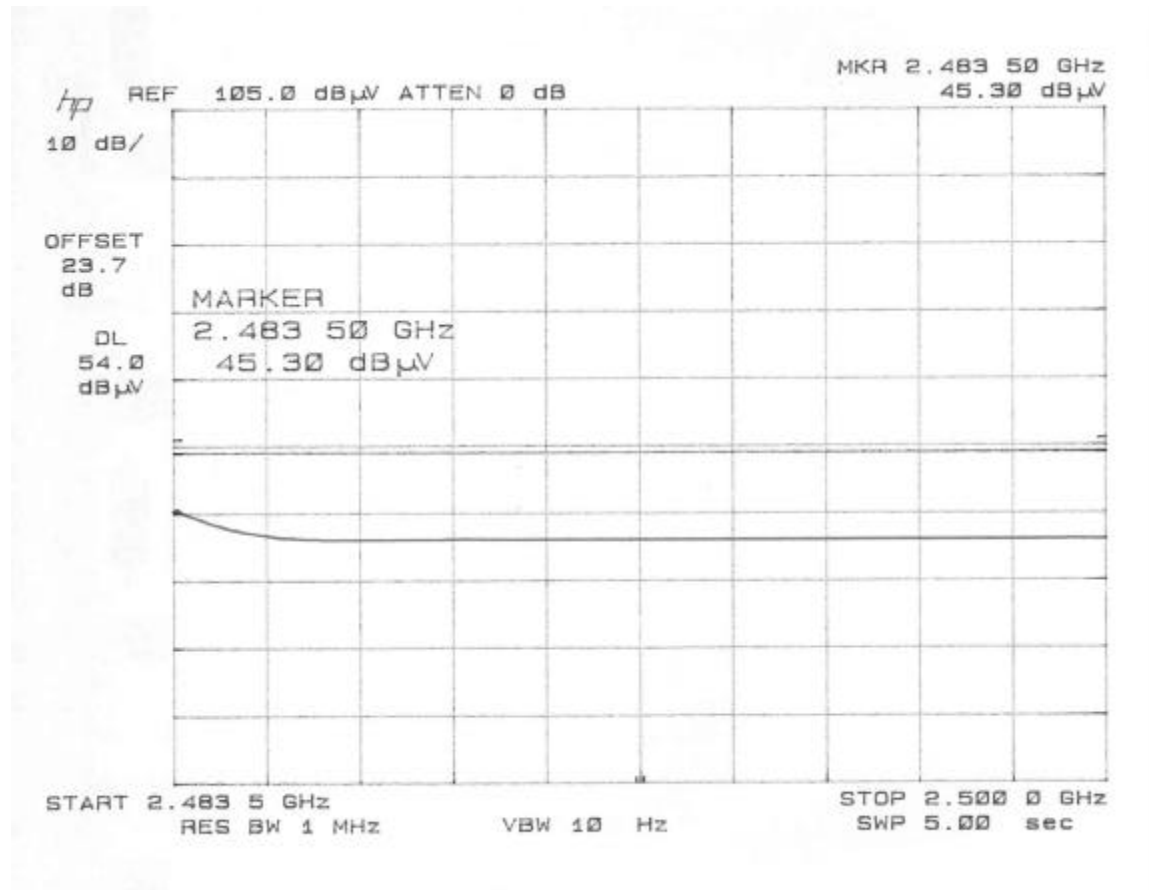

**WORST CASE UPPER RESTRICTED BAND WITH BLUETOOTH OPERATING AT THE HIGHEST FREQUENCY AND CO-LOCATED WLAN OPERATING SIMULTANEOUSLY AT 5.745 GHZ – VERTICAL AVERAGE**

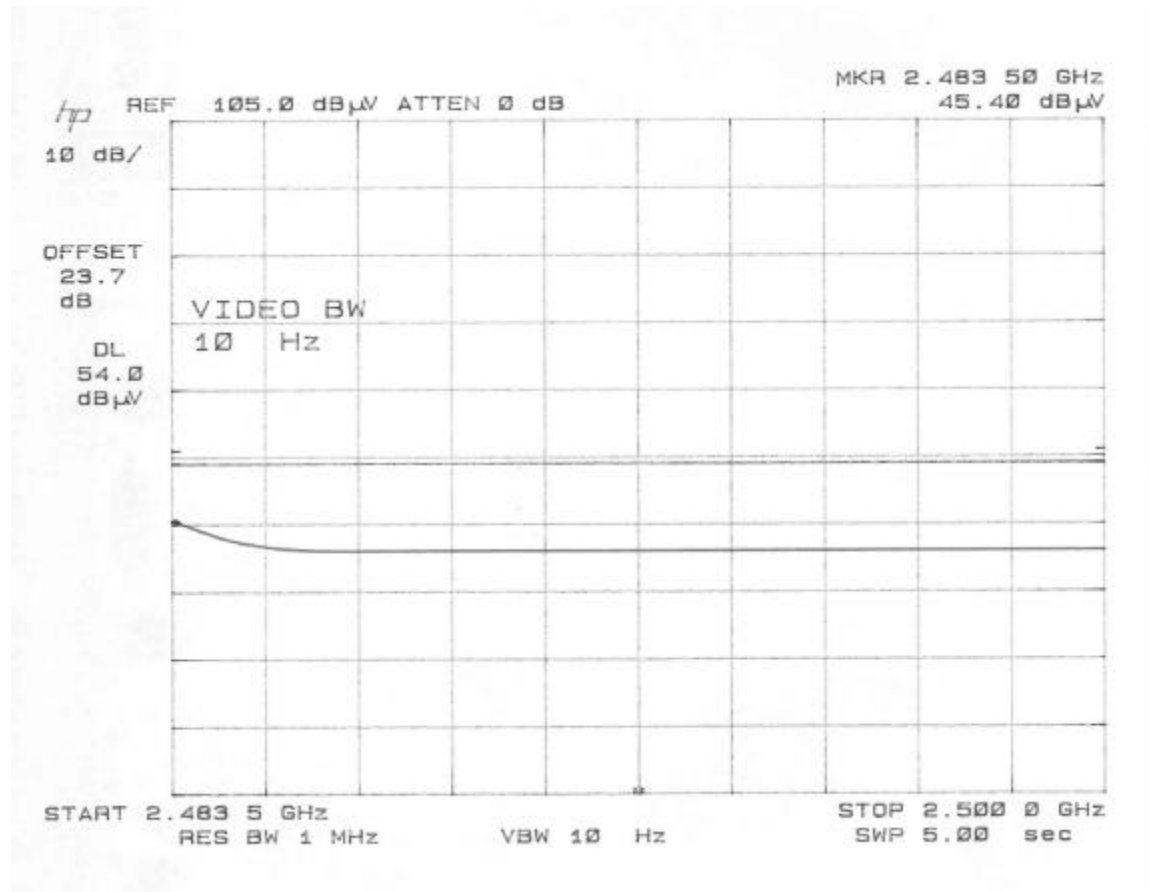

**WORST CASE BLUETOOTH SPURIOUS RADIATED EMISSIONS WITH CO-LOCATED WLAN OPERATING IN THE 5.8 GHZ BAND**

01/17/03 High Frequency Measurement  
Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: NEELESH RAJ  
Project #: 02U1584  
Company: TOSHIBA  
EUT Descrip.: TOUCH SCREEN LAPTOP PC WITH CSR BT AND 802.11 a/b COMBO WIRELESS LAN MODULE  
EUT M/N: NIMBUS  
Test Target: FCC  
Mode Oper: TX

**Test Equipment:**

Cable ( feet )	EMCO Horn 1-18GHz	Pre-amplifier 1-26GHz	Spectrum Analyzer	Horn > 18GHz
15	T73; S/N: 6717	Miteq NSP2600-44	8566B Analyzer	

**Peak Measurements:** 1 MHz Resolution Bandwidth  
1MHz Video Bandwidth

**Average Measurements:** 1 MHz Resolution Bandwidth  
10Hz Video Bandwidth

f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes	
<b>BLUETOOTH</b>																
Worst case Bluetooth harmonic: 2.441 GHz, Max Power + WLAN ON at 5.745 GHz, Max Power																
4.882	3.3	53.3	53.3	34.0	5.8	-36.1	-9.5	1.0	48.5	48.5	74.0	54.0	-25.5	-5.5	V	
4.882	3.3	52.0	52.0	34.0	5.8	-36.1	-9.5	1.0	47.2	47.2	74.0	54.0	-26.8	-6.8	H	
7.323	3.3	51.2	51.2	37.2	7.3	-36.3	-9.5	1.0	51.0	51.0	74.0	54.0	-23.0	-3.0	V	
7.323	3.3	50.0	50.0	37.2	7.3	-36.3	-9.5	1.0	49.8	49.8	74.0	54.0	-24.2	-4.2	H	
*THE PEAK LEVEL IS LESS THEN THE AVERAGE LIMIT																
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit			
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit			
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit			
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit			
CL	Cable Loss					HPF	High Pass Filter									

## 10. SETUP PHOTOS





**END OF REPORT**