


INTERTEK TESTING SERVICES


Report No.: HK12030715-1
Sample No.: 1/2

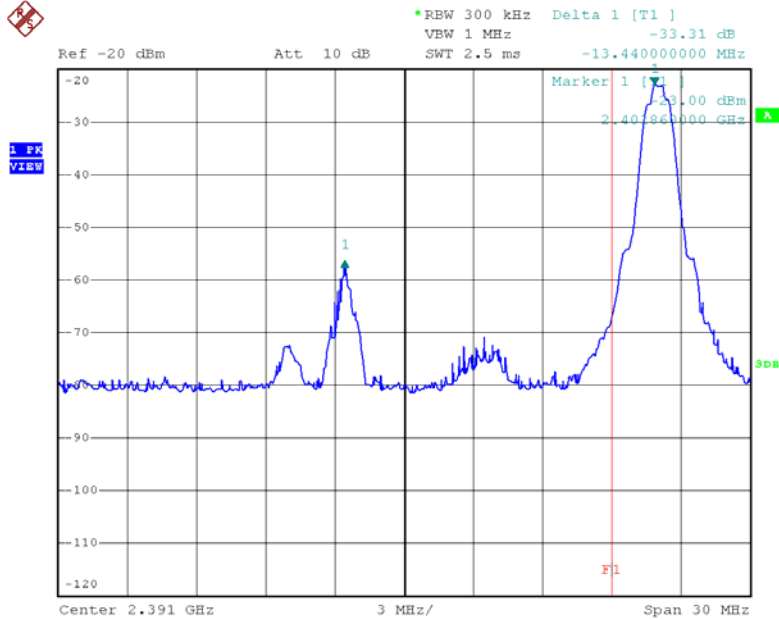

OATS = 92.0dBuV/m
 Field Strength (Peak)
 = 92.00 – 33.31 dBuV/m
 = 58.69 dBuV/m
 (Limit: 74 dBuV/m)

Field Strength (Average)
 = 58.69 – AF dBuV/m
 = 58.69 – 30.10 dBuV/m
 = 28.59 dBuV/m
 (Limit: 54 dBuV/m)

Date: 21.APR.2012 01:01:31

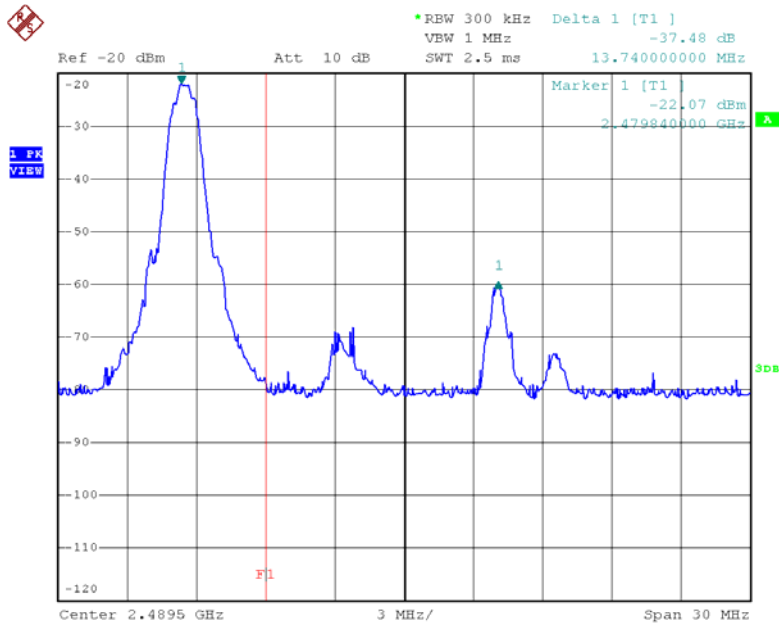

OATS = 90.0dBuV/m
 Field Strength (Peak)
 = 90.00 – 37.48 dBuV/m
 = 52.52 dBuV/m
 (Limit: 74 dBuV/m)

Field Strength (Average)
 = 52.52 – AF dBuV/m
 = 52.52 – 30.10 dBuV/m
 = 22.42 dBuV/m
 (Limit: 54 dBuV/m)

Date: 21.APR.2012 00:58:27

Bandedge Plot – Pursuant to FCC Part 15 Section 15. 249 Requirement (Pass)