



RADIO TEST REPORT

Test Report No.: 27FE0254-YK-B

Applicant : Alps Electric Co., Ltd.
Type of Equipment : Passive Entry System (Hand Unit)
Model No. : **TWB1J482**
FCC ID : **CWTWBJ482**
Test Standard : FCC Part15 Subpart C: 2006
Test Result : **Complied**

1. This test report shall not be reproduced except in full, without the written approval of UL Apex Co., Ltd.
2. The results in this report apply only to the sample tested.
3. This equipment is in compliance with the above regulation.
4. The test results in this test report are traceable to the national or international standards.

Date of test: February 14, 2007

Tested by: T. Imamura
Toyokazu Imamura

Approved by: O. Watatani
Osamu Watatani
Manager of Yamakita EMC Lab.

UL Apex Co., Ltd.
YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011 Facsimile: +81 465 77 2112

MF060b (14.06.06)

Table of Contents	Page
1 Applicant Information	3
2 Equipment under test (E.U.T.)	3
3 Test Specification, Procedures and Results	4
4 System Test Configuration	6
5 Automatically Deactivate	7
6 Radiated Emissions (Fundamental & Spurious)	8
7 Bandwidth	9
<u>Contents of Appendixes</u>	10
APPENDIX 1: Photographs of test setup	11
APPENDIX 2: Test Data	13
APPENDIX 3: Test instruments	20

UL Apex Co., Ltd.
YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011 Facsimile: +81 465 77 2112

MF060b (14.06.06)

1 Applicant Information

Company Name : Alps Electric Co., Ltd.
Address : 6-3-36 Furukawanakazato, Osaki-shi, Miyagi-ken, 989-6181 JAPAN
Telephone Number : +81 229 23 5111
Facsimile Number : +81 229 23 3755
Contact Person : Katsuhiro Seino

2 Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment : Passive Entry System (Hand Unit)
Model No. : TWB1J482
Serial No. : Automatically deactivate: 933756, Other test: 407DB17
Rating : DC3V (Battery)
Country of Manufacture : Japan
Receipt Date of Sample : February 9, 2007
Condition of EUT : Production model
Modification of EUT : No modification by the test lab.

2.2 Product Description

Model: TWB1J482 (referred to as the EUT in this report) is a Hand unit, which is carried by the owner of the vehicle. The Passive Entry System is a system which locks, unlocks and can start engine only with the intelligent-key of the vehicle.

Equipment type : Transceiver
Frequency of operation : Tx: 314.85MHz, Rx: 125kHz
Clock frequency : CPU: 8MHz (CR), SAW Resonator: 314.89MHz
Type of modulation : FSK (Tx)
Antenna type : Tx: Internal/PCB Pattern (Loop)
Rx: 3-axis Internal / (Loop coil and bar antenna)
Antenna connector type : None
ITU code : F1D
Operation temperature range : -10 to +60 deg.C.

*FCC Part15.31 (e)

This test was performed with the new battery (DC 3V); therefore, this EUT complies with the requirement.

*FCC Part15.203

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the requirement.

UL Apex Co., Ltd.
YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011 Facsimile: +81 465 77 2112

MF060b (14.06.06)

3 Test Specification, Procedures and Results

3.1 Test specification

Test specification : FCC Part15 Subpart C: 2006
 Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
 Section 15.209: Radiated emission limits, general requirements
 Section 15.231 Periodic operation in the band 40.66 - 40.70 MHz and above 70 MHz

3.2 Procedures & Results

Item	Test Procedure	Specification	Remarks	Deviation	Worst Margin	Results
Conducted Emission	ANSI C63.4: 2003 7. AC powerline conducted emission measurements	Section 15.207(a)	-	N/A *1	-	N/A
Automatically Deactivate	ANSI C63.4:2003 13. Measurement of intentional radiators	Section 15.231(a)(1)	Radiated	N/A	-	Complied
Electric Field Strength of Fundamental Emission	ANSI C63.4: 2003 13. Measurement of intentional radiators	Section 15.231 (b)	Radiated	N/A	15.4dB (Horizontal, PK)	Complied
Electric Field Strength of Spurious Emission	ANSI C63.4: 2003 13. Measurement of intentional radiators	Section 15.205 Section 15.209 Section 15.231 (b)	Radiated	N/A	1.4dB (1574.25MHz, Vertical, AV)	Complied
-20dB Bandwidth	ANSI C63.4: 2003 13. Measurement of intentional radiators	Section 15.231(c)	Radiated	N/A	-	Complied

*1) The test is not applicable since the EUT has no AC mains.

Note: UL Apex's EMI Work Procedures No.QPM05.

* No addition, exclusion nor deviation has been made from the standard.

3.3 Uncertainty

Radiated emission test

The measurement uncertainty (with 95% confidence level) for this test using Biconical antenna is ± 4.5 dB.
 The measurement uncertainty (with 95% confidence level) for this test using Logperiodic antenna is ± 4.3 dB.
 The measurement uncertainty (with 95% confidence level) for this test using Horn antenna is ± 5.2 dB.

The data listed in this report meets the limits unless the uncertainty is taken into consideration.

3.4 Test Location

UL Apex Co., Ltd. Yamakita EMC Lab.
907, Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken 258-0124 JAPAN
Telephone number : +81 465 77 1011
Facsimile number : +81 465 77 2112
NVLAP Lab. code : 200441-0

No. 1 test site has been fully described in a report submitted to FCC office, and accepted on August 26, 2005 (Registration No.: 95486).

IC Registration No. : IC3489A

No. 2 test site has been fully described in a report submitted to FCC office, and accepted on April 4, 2005 (Registration No.: 466226).

IC Registration No. : IC3489A-2

No. 1 anechoic chamber has been fully described in a report submitted to FCC office, and accepted on November 2, 2005 (Registration No.: 95967).

IC Registration No. : IC3489A-B

Test room	Width x Depth x Height (m)	Test room	Width x Depth x Height (m)
No.1 shielded room	8.0 x 5.0 x 2.5	No.1	10.0 x 7.5 x 5.7
No.2 shielded room	5.0 x 4.0 x 2.5	Semi-anechoic chamber	
No.3 shielded room	4.0 x 5.0 x 2.7		

**UL Apex Co., Ltd.
YAMAKITA EMC LAB.**

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011 Facsimile: +81 465 77 2112

MF060b (14.06.06)

4 System Test Configuration


4.1 Justification

The system was configured in typical fashion (as a customer would normally use it) for testing.

Test mode: Transmitting (314.85MHz)

* The test was performed with the operation of continuous transmitting to be set as the maximum data rate.

4.2 Configuration of Tested System



* Test data was taken under worse case conditions.

Description of EUT and support equipment

No.	Item	Model number	Serial number *1)	Manufacturer	FCC ID (Remarks)
A	Passive Entry System (Hand Unit)	TWB1J482	933756 407DB17	Alps Electric Co., Ltd.	CWTWBJ482 (EUT)

*1) Automatically deactivate: 933756, Other test: 407DB17

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011 Facsimile: +81 465 77 2112

MF060b (14.06.06)

5 Automatically Deactivate

5.1 Operating environment

The test was carried out in No.1 anechoic chamber.

5.2 Test procedure

The bandwidth was measured with a spectrum analyzer and a search coil placed by the EUT.

Limit: A manually transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

5.3 Results

Summary of the test results : Pass

Date : February 14, 2007 Test engineer : Toyokazu Imamura

**UL Apex Co., Ltd.
YAMAKITA EMC LAB.**

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011 Facsimile: +81 465 77 2112

MF060b (14.06.06)

6 Radiated Emissions (Fundamental & Spurious)

6.1 Operating environment

The test was carried out in No.1 anechoic chamber.

Temperature : See test data
Humidity : See test data

6.2 Test configuration

EUT was placed on a urethane platform of nominal size, 0.5m by 0.5m, raised 80cm above the conducting ground plane. A drawing of the set up is shown in the photos of Appendix 1.

6.3 Test conditions

Frequency range : 30MHz - 4GHz
EUT position : Table top
EUT operation mode : Transmitting

6.4 Test procedure

The Radiated Electric Field Strength intensity has been measured with a ground plane and at a distance of 3m. The measuring antenna height was varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization.

Measurements were performed with QP, PK, and AV detector.

The radiated emission measurements were made with the following detector function of the test receiver.

Frequency	Below 1GHz	Above 1GHz
Instrument used	Test Receiver	Spectrum Analyzer
Detector IF Bandwidth	QP: BW 120kHz	PK: RBW: 1MHz/VBW: 1MHz AV: RBW: 1MHz/VBW: 10Hz

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

The equipment was previously checked at each position of three axes X, Y and Z. The position in which the maximum noise occurred was chosen to put into measurement. See the table below and photographs in page 12. With the position, the noise levels of all the frequencies were measured.

	Below 1GHz	Above 1GHz
Horizontal	Y	Z
Vertical	X	X

6.5 Results

Summary of the test results : Pass

Date : February 14, 2007 Test engineer : Toyokazu Imamura

**UL Apex Co., Ltd.
YAMAKITA EMC LAB.**

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011 Facsimile: +81 465 77 2112

MF060b (14.06.06)

7 Bandwidth

7.1 Operating environment

The test was carried out in No.1 anechoic chamber.

7.2 Test procedure

The bandwidth was measured with a spectrum analyzer and an antenna which is placed by the EUT.

7.3 Results

Summary of the test results: Pass

Date : February 14, 2007 Test engineer : Toyokazu Imamura

**UL Apex Co., Ltd.
YAMAKITA EMC LAB.**

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011 Facsimile: +81 465 77 2112

MF060b (14.06.06)

APPENDIX 1: Photographs of test setup

Page 11 : Radiated emission
Page 12 : Pre-check of the worst position

APPENDIX 2: Test Data

Page 13 : Automatically Deactivate

Page 14 - 16 : Radiated Emission
14 : Fundamental
15 : Harmonics
16-17 : Other

Page 18 - 19 : -20dB Bandwidth and Occupied Bandwidth

APPENDIX 3: Test instruments

Page 20 : Test instruments

UL Apex Co., Ltd.


YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011 Facsimile: +81 465 77 2112

MF060b (14.06.06)

Radiated emission

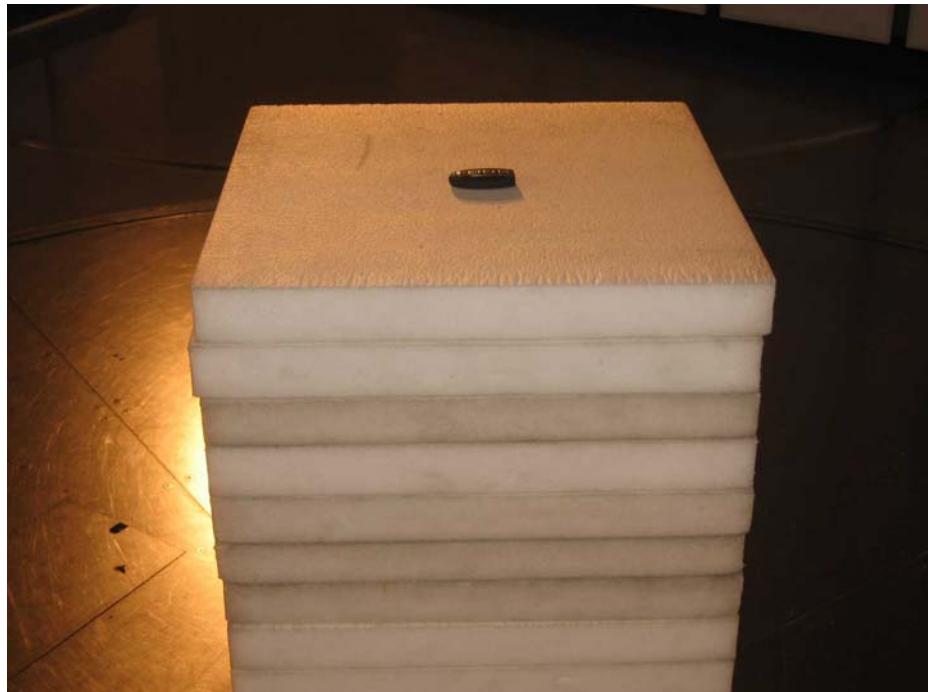


UL Apex Co., Ltd.
YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011 Facsimile: +81 465 77 2112

MF060b (14.06.06)

Pre-check of the worst position

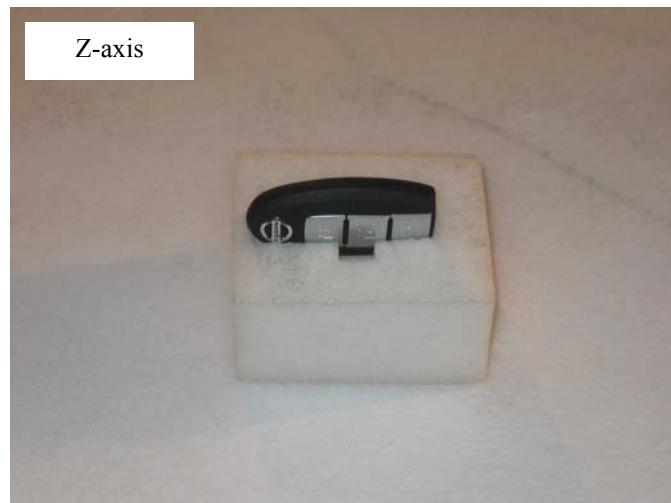

UL Apex Co., Ltd.
YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011 Facsimile: +81 465 77 2112


MF060b (14.06.06)

Automatically deactivate: FCC 15.231(a)(1)

COMPANY : Alps Electric Co., Ltd.
EQUIPMENT : Passive Entry System(Hand Unit)
MODEL NUMBER:TWB1J482
SERIAL NUMBER: 933756
FCC ID : CWTWBJ482
POWER : DC3V

UL Apex Co.,Ltd. Yamakita No.1 Anechoic Chamber
REPORT NO : 27FE0254-YK-B
REGULATION : Fcc Part15SubpartC 231(a)(1)
DATE : 2007/02/14
TEMP./HUMI : 25°C/45%
TEST MODE : Transmitting (314.85MHz)
ENGINEER : Toyokazu Imamura

Time of Transmitting	Limit
[sec]	[sec]
0.364	5.00

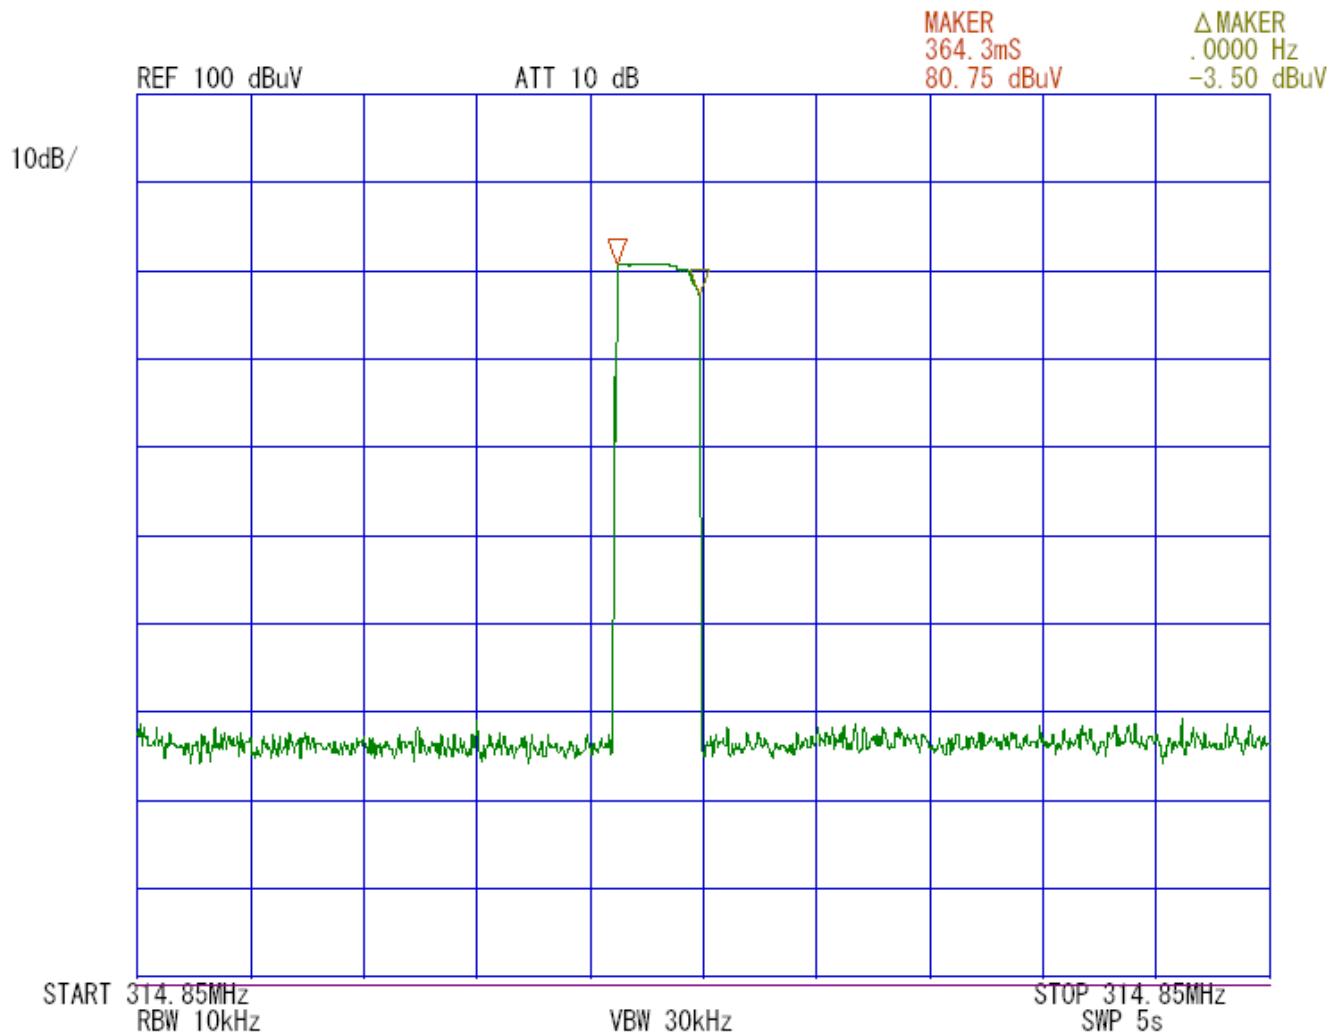

Date of carrier emissions

UL Apex Co.,Ltd.
YAMAKITA NO.1 ANECHOIC CHAMBER
Report No. : 27FE0254-YK-B

Company : Alps Electric Co.,Ltd.
Equipment : Passive Entry System (Hand Unit) Regulation : FCC Part15C Section 15.231(b)
Model : TWB1J482 Test Distance : 3m
Sample No. : 407DB17 Date : 2007/2/14
Power : DC 3.0V Temperature : 25deg.C
Mode : Transmitting (314.85MHz) Humidity : 45%
FCC ID : CWTWB1J482

ENGINEER : Toyokazu Imamura

Below 1GHz PK DETECT(Test Receiver: BW 120kHz)

No.	FREQ [MHz]	READING		ANT Factor	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN [dB]	RESULT		LIMIT [dBuV/m]	MARGIN	
		HOR	VER [dBuV]					HOR	VER [dBuV/m]		HOR	VER [dB]
1	314.85	63.3	58.6	14.7	27.7	3.9	6.0	60.2	55.5	75.6	15.4	20.1

DATA OF RADIATION TEST

UL Apex Co.,Ltd.

YAMAKITA No.1 ANECHOIC CHAMBER

Report No. : 27FE0254-YK-B

No.	FREQ.	ANT	READING		ANT	AMP	CABLE	ATTEN.	RESULT		LIMITS	MARGIN	
	[MHz]	TYPE	HOR	VER	FACTOR	GAIN	LOSS	[dB]	HOR	VER	[dB μV/m]	[dB μV/m]	[dB]
1.	629.77	BB	37.2	37.6	19.9	29.2	5.6	6.0	39.5	39.9	46.0	6.5	6.1
2.	944.55	BB	26.4	26.2	22.8	28.8	7.0	6.1	33.5	33.3	46.0	12.5	12.7

CALCULATION: READING + ANT. FACTOR + CABLE LOSS - AMP. GAIN + ATTEN.

■ ANTENNA : KBA-03 (BBA9106) 30~299, 99MHz / KLA-03 (USLP9143) 300~1000MHz
■ AMP : KAF-05 (8447D) ■ CABLE : KCC-30_31_32_34 (RE) ■ RECEIVER : APRCV03 (SMV41)

Page:

DATA OF RADIATION TEST

UL Apex Co.,Ltd.

YAMAKITA No.1 ANECHOIC CHAMBER

Report No. : 27FE0254-YK-B

Applicant : Alps Electric Co., Ltd.
 Kind of Equipment : Passive Entry System (Hand Unit)
 Model No. : TWB1J482
 Serial No. : 407DB17
 Power : DC3V
 Mode : Transmitting (314.85MHz)
 Remarks : PK
 Date : 2/14/2007
 Test Distance : 3 m
 Temperature : 25 °C Engineer : Toyokazu Imamura
 Humidity : 45 %
 Regulation : FCC Part15C § 15.209 (PK Detection)

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS		MARGIN	
			HOR [dB μ V]	VER [dB μ V]					HOR [dB μ V/m]	VER [dB μ V/m]	HOR [dB]	VER [dB]	HOR [dB]	VER [dB]
1.	1259.40	BB	49.8	50.7	24.6	37.3	3.4	0.0	40.5	41.4	74.0	33.5	32.6	
2.	1574.25	BB	61.5	62.2	26.3	36.9	3.7	0.0	54.6	55.3	74.0	19.4	18.7	
3.	1889.10	BB	50.9	51.0	29.1	36.7	4.1	0.0	47.4	47.5	74.0	26.6	26.5	
4.	2203.95	BB	46.8	46.8	29.9	36.7	4.3	0.0	44.3	44.3	74.0	29.7	29.7	
5.	2518.80	BB	44.9	43.8	29.8	36.8	4.6	0.0	42.5	41.4	74.0	31.5	32.6	
6.	2833.65	BB	46.1	45.9	31.0	37.2	4.9	0.0	44.8	44.6	74.0	29.2	29.4	
7.	3148.50	BB	44.5	46.2	31.4	37.3	5.0	0.0	43.6	45.3	74.0	30.4	28.7	

CALCULATION: READING + ANT. FACTOR + CABLE LOSS - AMP. GAIN + ATTEN.

■ANTENNA:KHA-01(SAS-200 571) 1-18GHz

■CABLE:KCC-D11/D12 ■PREAMP:KAF-02(8449B) ■SPECTRUMANALYZER: R3271A(KSA-04)

Page:

DATA OF RADIATION TEST

UL Apex Co.,Ltd.

YAMAKITA No.1 ANECHOIC CHAMBER

Report No. : 27FE0254-YK-B

Applicant : Alps Electric Co., Ltd.
 Kind of Equipment : Passive Entry System (Hand Unit)
 Model No. : TWB1J482
 Serial No. : 407DB17
 Power : DC3V
 Mode : Transmitting (314.85MHz)
 Remarks : AV
 Date : 2/14/2007
 Test Distance : 3 m
 Temperature : 25 °C Engineer : Toyokazu Imamura
 Humidity : 45 %
 Regulation : FCC Part15C § 15.209 (AV Detection)

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μ V/m]	MARGIN	
			HOR [dB μ V]	VER [dB μ V]					HOR [dB μ V/m]	VER [dB μ V/m]		HOR [dB]	VER [dB]
1.	1259.40	BB	39.0	37.6	24.6	37.3	3.4	0.0	29.7	28.3	54.0	24.3	25.7
2.	1574.25	BB	58.6	59.5	26.3	36.9	3.7	0.0	51.7	52.6	54.0	2.3	1.4
3.	1889.10	BB	41.8	38.4	29.1	36.7	4.1	0.0	38.3	34.9	54.0	15.7	19.1
4.	2203.95	BB	36.1	35.2	29.9	36.7	4.3	0.0	33.6	32.7	54.0	20.4	21.3
5.	2518.80	BB	34.1	33.9	29.8	36.8	4.6	0.0	31.7	31.5	54.0	22.3	22.5
6.	2833.65	BB	34.8	34.5	31.0	37.2	4.9	0.0	33.5	33.2	54.0	20.5	20.8
7.	3148.50	BB	33.2	34.0	31.4	37.3	5.0	0.0	32.3	33.1	54.0	21.7	20.9

CALCULATION: READING + ANT. FACTOR + CABLE LOSS - AMP. GAIN + ATTEN.

■ANTENNA:KHA-01(SAS-200 571) 1-18GHz

■CABLE:KCC-D11/D12 ■PREAMP:KAF-02(8449B) ■SPECTRUMANALYZER: R3271A(KSA-04)

Page:


-20dB Bandwidth: FCC 15.231(c)

COMPANY : Alps Electric Co., Ltd.
EQUIPMENT : Passive Entry System(Hand Unit)
MODEL NUMBER: TWB1J482
SERIAL NUMBER: 407DB17
FCC ID : CWTWB1J482
POWER : DC3V

UL Apex Co.,Ltd. Yamakita No.1 Anechoic Chamber
REPORT NO : 27FE0254-YK-B
REGULATION : Fcc Part15SubpartC 231(c)
DATE : 2007/02/14
TEMP./HUMI : 25°C/45%
TEST MODE : Transmitting (314.85MHz)
ENGINEER : Toyokazu Imamura

Bandwidth Limit : fundamental Frequency $314.85 \times 0.25\% = 787.125$ kHz

-20dB Bandwidth [kHz]	Bandwidth Limit [kHz]	Result
90.857	787.125	Pass

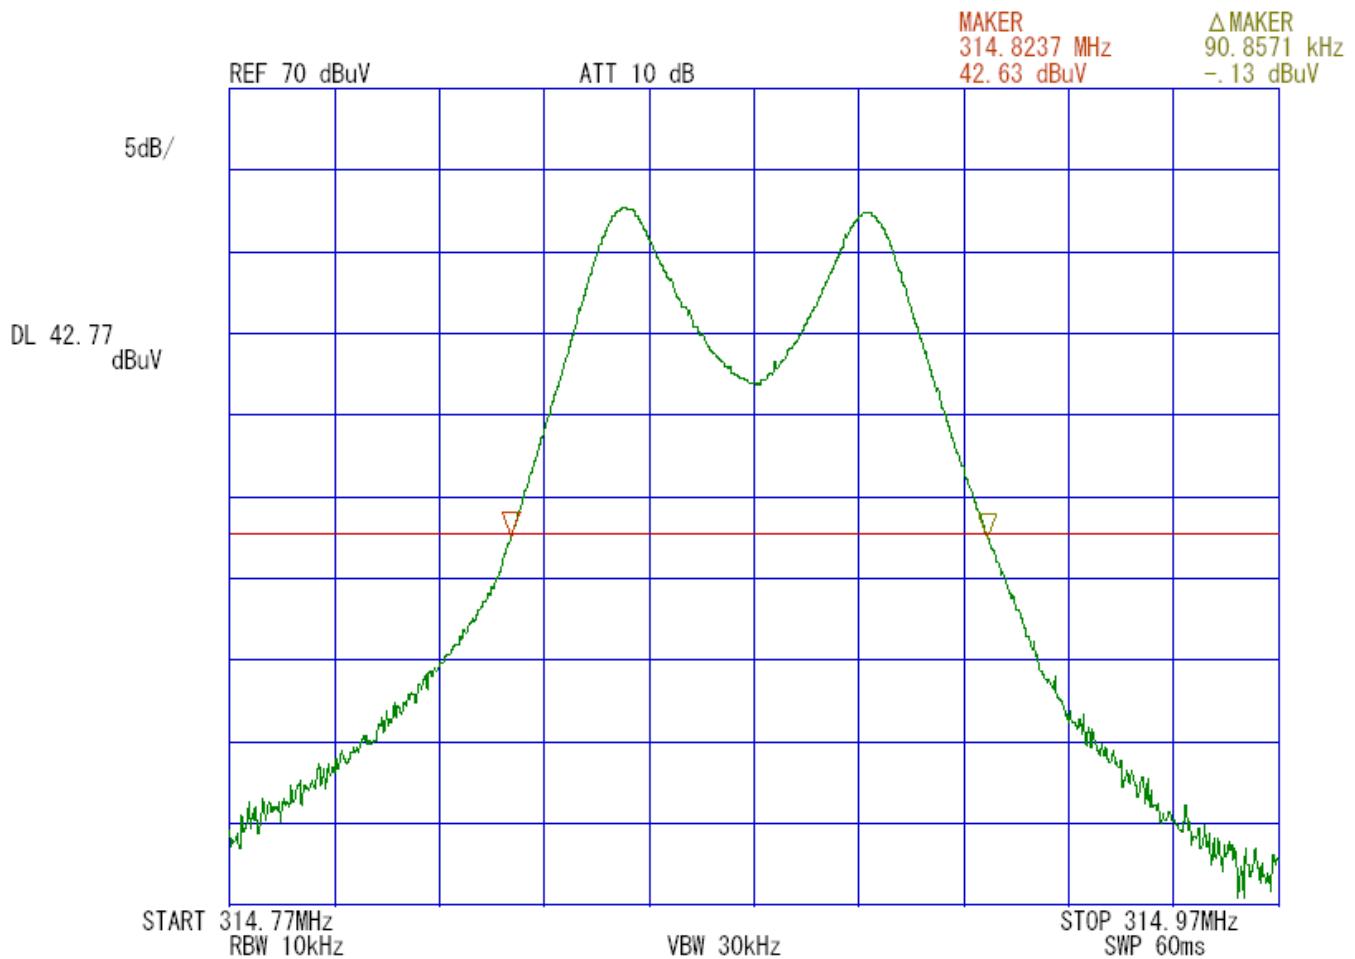


Occupied Bandwidth(99%)

COMPANY : Alps Electrical Co., Ltd.
EQUIPMENT : Passive Entry System(Hand Unit)
MODEL NUMBER: TWB1J482
SERIAL NUMBER: 407DB17
FCC ID : CWTWBJ482
POWER : DC3V

UL Apex Co.,Ltd. Yamakita No.1 Anechoic Chamber
REPORT NO : 27FE0254-YK-B
DATE : 2007/02/14
TEMP./HUMI : 25°C/45%
TEST MODE : Transmitting (314.85MHz)
ENGINEER : Toyokazu Imamura

99% Occupied Bandwidth
[kHz]
126.4kHz

OBW (99%) : 126.4kHz

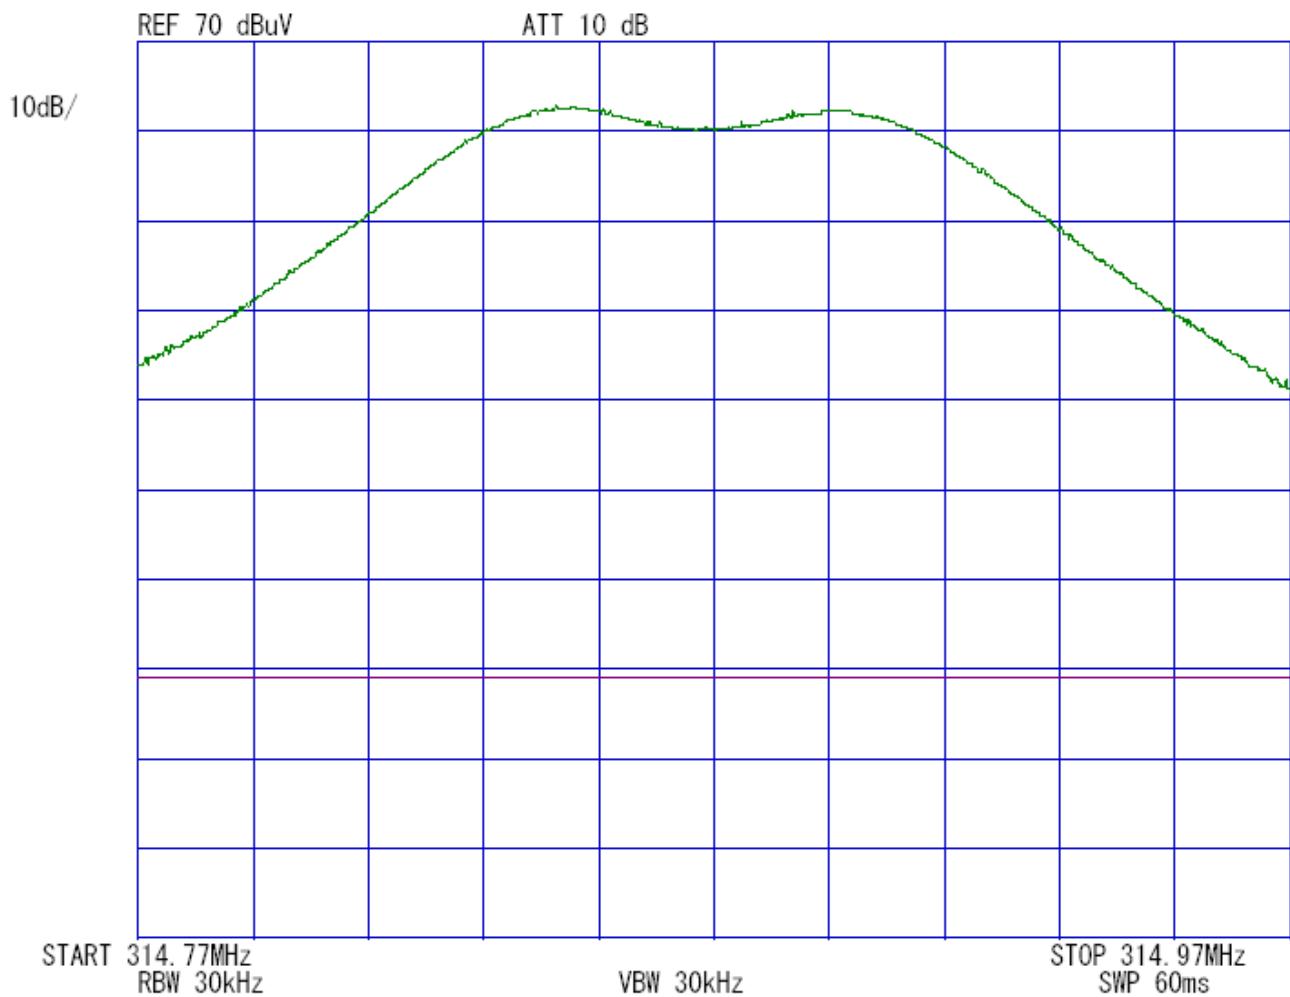

APPENDIX 3
Test Instruments
EMI test equipment

Control No.	Instrument	Manufacturer	Model No	Test Item	Calibration Date * Interval(month)
YA-RE	Radiated emission(software)	UL-Apex	RE(Ver.1.5)	RE/AD/BW	-
KAEC-01(NSA)	Anechoic Chamber	JSE	Semi 3m	RE/BW	2006/08/31 * 12
KAT6-01	Attenuator	INMET	18N-6dB	RE/BW	2006/03/24 * 12
KBA-03	Biconical Antenna	Schwarzbeck	BBA9106	RE	2007/01/06 * 12
KCC-30/31/32 /34/KRM-03	Coaxial Cable/RF Relay Matrix	Fujikura/Suhner/TSJ	5D-2W/S04272B/RFM-E421	RE/BW	2006/11/27 * 12
KLA-03	Logperiodic Antenna	Schwarzbeck	USLP9143	RE	2007/01/06 * 12
KSA-04	Spectrum Analyzer	Advantest	R3271A	RE/AD/BW	2006/09/05 * 12
KOS-02	Humidity Indicator	Custom	CTH-190	RE/AD/BW	2006/07/10 * 24
APRCV03	Test Receiver	MEB	SMV41	RE	2006/10/04 * 12
KLP-01	Loop Antenna	Rohde & Schwarz	HFH2-Z2	RE/BW	2006/06/01 * 12
KAF-02	Pre Amplifier	Hewlett Packard	8449B	RE/BW	2006/04/24 * 12
KJM-01	Measure	TAJIMA	GL19-55	RE/BW	-
KCC-D7/D13	Coaxial cable	Advantest/Suhuner	A01002/SUCOFLEX104	RE	2006/04/11 * 12
KHA-01	Horn Antenna	A.H.Systems	SAS-200/571	RE	2006/08/17 * 12
KAF-05	Pre Amplifier	Agilent	8447D	RE/AD/BW	2006/04/21 * 12

The expiration date of the calibration is the end of the expired month .

All equipment is calibrated with traceable calibrations . Each calibration is traceable to the national or international standards .

Test Item :

- RE: Radiated emission,
- AD: Automatically deactivate
- BW: Bandwidth