



RF MEASUREMENT REPORT

FCC ID: DD4ADX1K54S
Applicant: Shure Incorporated
Product: Bodypack Transmitter
Model No.: ADX1 K54, ADX1LEMO3 K54
Brand Name: , **SHURE**[®]
FCC Classification: Licensed LPAS Device (TLD)
FCC Rule Part(s): Part 74 Subpart H (Section 74.861)
Result: Complies
Received Date: 2024-07-18
Test Date: 2024-08-02 ~ 2024-08-15

Reviewed By:

Jame Yuan

Approved By:

Robin Wu



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standards through the calibration of the equipment and evaluated measurement uncertainty herein.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2407RSU039-U5	V01	Initial Report	2024-08-28	Valid

CONTENTS

Description	Page
1. General Information	5
1.1. Applicant	5
1.2. Manufacturer	5
1.3. Testing Facility	5
1.4. Product Information	6
1.5. Radio Specification under Test	6
1.6. Working Frequencies	6
2. Test Configuration	7
2.1. Test Mode	7
2.2. Test Software	7
2.3. Applied Standards	7
2.4. Test Environment Condition	7
3. Measuring Instrument	8
4. Decision Rules and Measurement Uncertainty	9
4.1. Decision Rules	9
4.2. Measurement Uncertainty	9
5. Test Result	10
5.1. Summary	10
5.2. RF Output Power Measurement	11
5.2.1. Test Limit	11
5.2.2. Test Procedure	11
5.2.3. Test Setting	11
5.2.4. Test Setup	11
5.2.5. Test Result	11
5.3. Frequency Tolerance Measurement	12
5.3.1. Test Limit	12
5.3.2. Test Procedure	12
5.3.3. Test Setting	12
5.3.4. Test Setup	13
5.3.5. Test Result	13
5.4. 99% Occupied Bandwidth Measurement	14
5.4.1. Test Limit	14
5.4.2. Test Procedure	14
5.4.3. Test Setting	14
5.4.4. Test Setup	14

5.4.5.	Test Result	14
5.5.	Out-of-band Emission Mask Measurement	15
5.5.1.	Test Limit	15
5.5.2.	Test Procedure	15
5.5.3.	Test Setting	15
5.5.4.	Test Setup	15
5.5.5.	Test Result	16
5.6.	Necessary Bandwidth Measurement	17
5.6.1.	Test Limit	17
5.6.2.	Test Procedure	17
5.6.3.	Test Setting	17
5.6.4.	Test Setup	17
5.6.5.	Test Result	17
5.7.	Radiated Spurious Emissions Measurement	18
5.7.1.	Test Limit	18
5.7.2.	Test Procedure	18
5.7.3.	Test Setting	18
5.7.4.	Test Setup	19
5.7.5.	Test Result	20
Appendix A	- Test Result	21
A.1	RF Output Power Test Result	21
A.2	Frequency Tolerance Test Result	22
A.3	99% Occupied Bandwidth Test Result	23
A.4	Out-of-band Emission Mask Test Result	25
A.5	Necessary Bandwidth Test Result	29
A.6	Radiated Spurious Emissions Test Result	37
Appendix B	- Test Setup Photograph	39
Appendix C	- EUT Photograph	40

1.4. Product Information

Product Name	Bodypack Transmitter
Model No.	ADX1 K54, ADX1LEMO3 K54
Serial No.	2DC28429630
Microphone Specification	UHF Microphone Transmitter
ZigBee Specification	802.15.4
Antenna Information	Refer to section 1.5
Power Type	Rechargeable Li-battery
Accessory	
Battery	Model: SB910 Rating Voltage: 3.6V = 2200mAh 7.92Wh
Notes:	
1.The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.	
2.ADX1 and ADX1LEMO3 are completely same except audio connector, ADX1 contains TQG connector, while ADX1LEMO3 contains LEMO3 connector.	

1.5. Radio Specification under Test

Frequency Range	606 ~ 608 MHz & 653 ~ 657 MHz
Declared Power Level	STD: 2mW & 10mW & 20/40mW HD: 2mW
Type of Modulation	8PSK
Channel Spacing	25kHz
Antenna Type	Dipole
Antenna Gain	0.60 dBi
Note 1: Power level and transmit frequency can be selected using the front panel controls.	
Note 2: For other features of this EUT, test report will be issued separately.	

1.6. Working Frequencies

Bottom Channel (MHz)	Middle Channel (MHz)	Top Channel (MHz)
606 ~ 608 MHz Frequency Band (Max Power = 40mW)		
606.000	607.000	607.875
653 ~ 657 MHz Frequency Band (Max Power = 10mW)		
653.125	N/A	657.000

2. Test Configuration

2.1. Test Mode

Mode 1: Transmit at K54 Band by STD Mode (10/40mW)
Mode 2: Transmit at K54 Band by HD Mode (2mW)

2.2. Test Software

The test utility software used during testing was “teraterm”, and the version was V4.103, all test commands were provided by the manufacturer.

2.3. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 74.861
- KDB 206256 D01v02r01
- ANSI C63.26-2015
- ETSI EN 300 422 - 1 V 1.4.2

2.4. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20 ~ 75%RH

3. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
USB Power Sensor	Keysight	U2021XA	MRTSUE06447	1 year	2025-05-08	WZ-SR5
Thermohygrometer	testo	608-H1	MRTSUE06402	1 year	2025-05-12	WZ-SR5
Shielding Room	HUAMING	WZ-SR5	MRTSUE06442	N/A	N/A	WZ-SR5
Signal Analyzer	Keysight	N9010B	MRTSUE06457	1 year	2025-05-08	WZ-SR5/ WZ-TR3
Temperature Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2024-09-27	WZ-TR3
Thermohygrometer	testo	608-H1	MRTSUE11268	1 year	2024-12-14	WZ-TR3
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06023	1 year	2025-07-26	WZ-AC1
Preamplifier	Agilent	83017A	MRTSUE06076	1 year	2024-11-09	WZ-AC1
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2025-05-15	WZ-AC1
Anechoic Chamber	TDK	WZ-AC1	MRTSUE06212	1 year	2025-04-19	WZ-AC1
Signal Analyzer	Keysight	N9010B	MRTSUE06607	1 year	2024-10-23	WZ-AC1
Thermohygrometer	testo	608-H1	MRTSUE11039	1 year	2024-10-25	WZ-AC1

Software	Version	Function
e3	230711	RE & CE
Controller_MF 7802	2.03C	RE Antenna & Turntable
BenchVue Power Meter	2018.1	Power

4. Decision Rules and Measurement Uncertainty

4.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2.
(Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

4.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
The maximum measurement uncertainty is evaluated as: 9kHz~150kHz: 3.58dB 150kHz~30MHz: 3.20dB
Radiated Emission Measurement
The maximum measurement uncertainty is evaluated as: Coaxial: 9kHz~30MHz: 2.61dB Coplanar: 9kHz~30MHz: 2.62dB Horizontal: 30MHz~200MHz: 3.79dB 200MHz~1GHz: 3.91dB 1GHz~40GHz: 4.99dB Vertical: 30MHz~200MHz: 4.06dB 200MHz~1GHz: 5.21dB 1GHz~40GHz: 4.90dB
Spurious Emissions, Conducted
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 2.3dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 1.4dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 2.7%

5. Test Result

5.1. Summary

FCC Part Section(s)	Test Description	Test Condition	Test Result
74.861(e)(1)(ii)	RF Output Power	Conducted	Pass
74.861(e)(4)	Frequency Stability		Pass
74.861(e)(5)	Occupied Bandwidth		Pass
74.861(e)(6)	Emission Mask		Pass
74.861(e)(7)	Necessary Bandwidth		Pass
74.861(e)(7)	Radiated Spurious Emission	Radiated	N/A

Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer.
The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) "N/A" means that this item is not applicable, and the detail information refer to relevant section.

5.2. RF Output Power Measurement

5.2.1. Test Limit

The conducted power may not exceed 250mW in 470 ~ 608 MHz band.

5.2.2. Test Procedure

ANSI C63.26-2015 - Section 5.2.4.2


5.2.3. Test Setting

The output of the EUT was connected to an RF average power meter through fixed attenuation.

The EUT was set to transmit on the low, middle, and high frequencies in each power level.

Measure the average power of the transmitter.

5.2.4. Test Setup

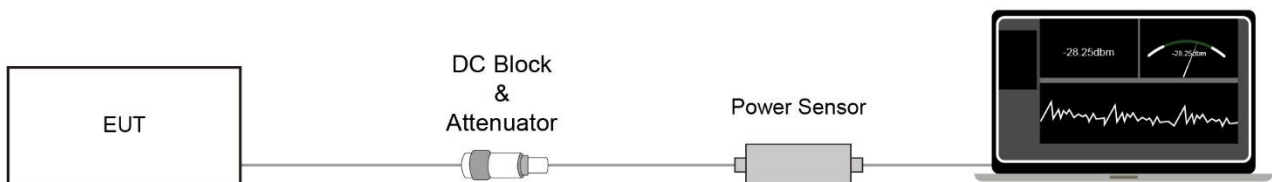

5.2.5. Test Result

Refer to Appendix A.1.

5.3. Frequency Tolerance Measurement

5.3.1. Test Limit

The frequency tolerance of the transmitter shall be 0.005 percent.

5.3.2. Test Procedure

ANSI C63.26 - Section 5.6.3

5.3.3. Test Setting

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint (If a product is specified to operate over a range of input voltage then the -15% variation is applied to the lowermost voltage and the $+15\%$ is applied to the uppermost voltage), record the maximum frequency change.

5.3.4. Test Setup

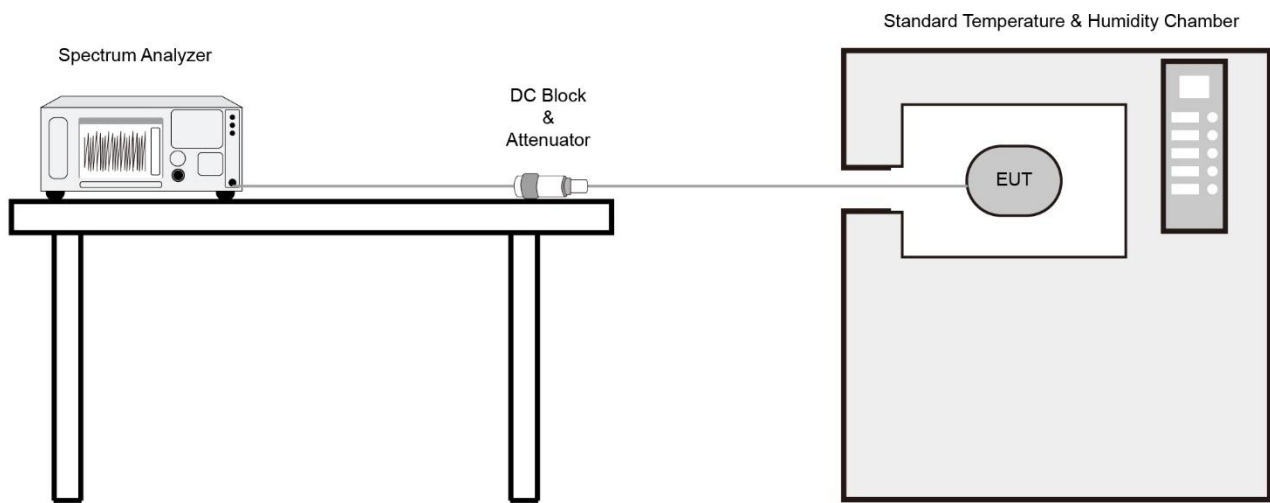

5.3.5. Test Result

Refer to Appendix A.2.

5.4. 99% Occupied Bandwidth Measurement

5.4.1. Test Limit

The operating bandwidth shall not exceed 200 kHz.


5.4.2. Test Procedure

ANSI C63.26-2015 - Section 5.4.4

5.4.3. Test Setting

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 - 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. Reported the measured 99% occupied bandwidth

5.4.4. Test Setup

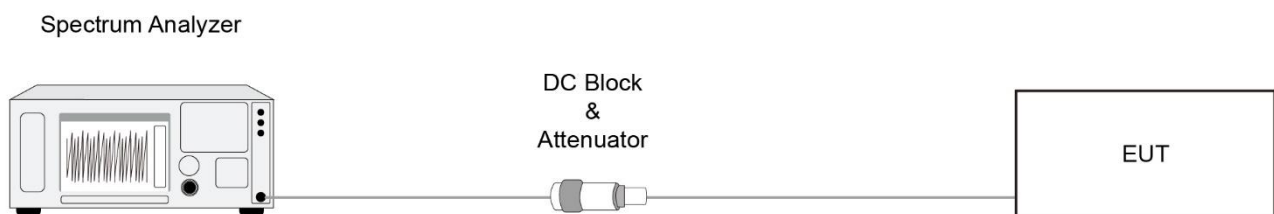

5.4.5. Test Result

Refer to Appendix A.3.

5.5. Out-of-band Emission Mask Measurement

5.5.1. Test Limit

The mean power of emissions shall be attenuated below the mean output power of the transmitter in accordance with the following schedule:

- (i) On any frequency removed from the operating frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: at least 25 dB;
- (ii) On any frequency removed from the operating frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: at least 35 dB;
- (iii) On any frequency removed from the operating frequency by more than 250 percent of the authorized bandwidth: at least $43 + 10 \log_{10}$ (mean output power in watts) dB.

5.5.2. Test Procedure


ANSI C63.26 - Section 5.7

5.5.3. Test Setting

Emission Mask

- a) The EUT was connected to a spectrum analyzer. The un-modulated carrier signal level was measured and recorded.
- b) The EUT was modulated with typical digital modulation.
- c) The spectrum analyzer center frequency was set to the EUT operating frequency; span was set to 2 MHz; resolution bandwidth was set to 1 MHz; video bandwidth set to 3 MHz; sweep time set to 3 s; after clear/write, max-hold was set; Marker 1 was set to RMS, then Marker 1 was set to reference value.
- d) The RMS output power was recorded and used to set the reference level on the spectrum analyzer.
- e) The spectrum analyzer span was then set to 1.5 MHz; resolution bandwidth set to 2 kHz, video bandwidth set to 5 kHz, sweep time to Auto.

5.5.4. Test Setup

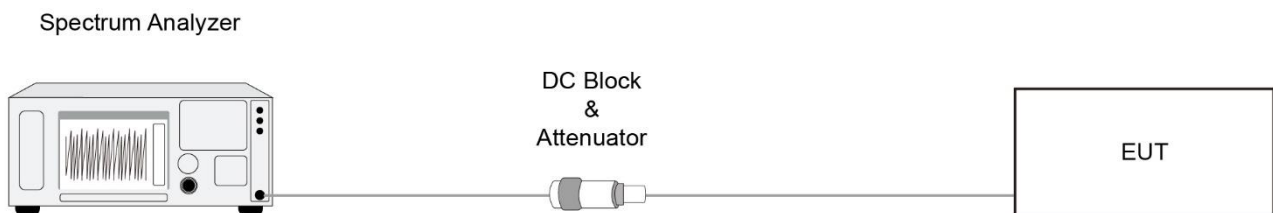


5.5.5. Test Result

Refer to Appendix A.4.

5.6. Necessary Bandwidth Measurement

5.6.1. Test Limit

Digital emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in section 8.3.2.2 of the European Telecommunications Institute Standard ETSI EN 300 422-1 v1.4.2, the transmitter output spectrum shall be within the mask defined as below figure.

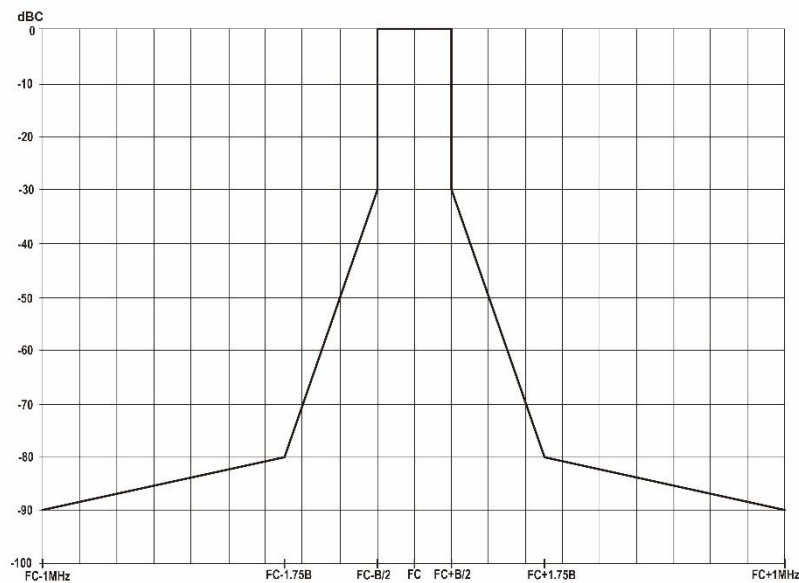

5.6.2. Test Procedure


EN 300 422-1 V1.4.2 clause 8.3.2.1.

5.6.3. Test Setting

The EUT was powered up and the transmit frequency & power output of the EUT were selected.

The spectrum analyzer center frequency is set to the nominal EUT channel center frequency.

5.6.4. Test Setup

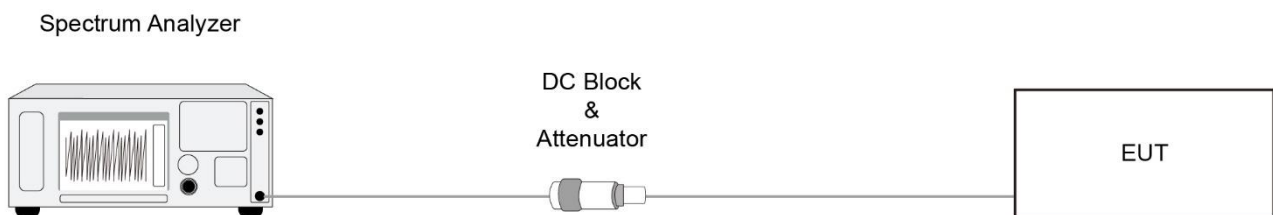

5.6.5. Test Result

Refer to Appendix A.5.

5.7. Radiated Spurious Emissions Measurement

5.7.1. Test Limit

According to FCC Part 74.861(e)(7), beyond one megahertz below and above the carrier frequency, emissions shall comply with the limits specified in section 8.4 of ETSI EN 300 422-1 v1.4.2.

State	Frequency Range		
	47MHz to 74MHz, 87.5MHz to 137MHz 174MHz to 230MHz, 470MHz to 862MHz	Other Frequencies below 1000MHz	Frequencies above 1000MHz
Operation	4nW	250nW	1uW
Standby	2nW	2nW	20nW

5.7.2. Test Procedure

ETSI EN 300 422-1 V1.4.2 clause 8.4.2.

5.7.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
25 ~ 30 MHz	9 kHz
30 ~ 1000 MHz	100 kHz
1000 ~ 6000 MHz	1 MHz

Emissions shall be investigated up to the 10th harmonic of the fundamental.


Compliance with the emission limits shall be demonstrated using an RMS Average detector.

All significant broadband and narrowband signals found in the preliminary sweeps were measured using a peak detector at a test distance of 3 meters.


At each frequency at which a component is detected, the sample shall be rotated to obtain maximum response and the effective radiated power of that component determined by a substitution measurement.

5.7.4. Test Setup

Below 1GHz Test Setup:

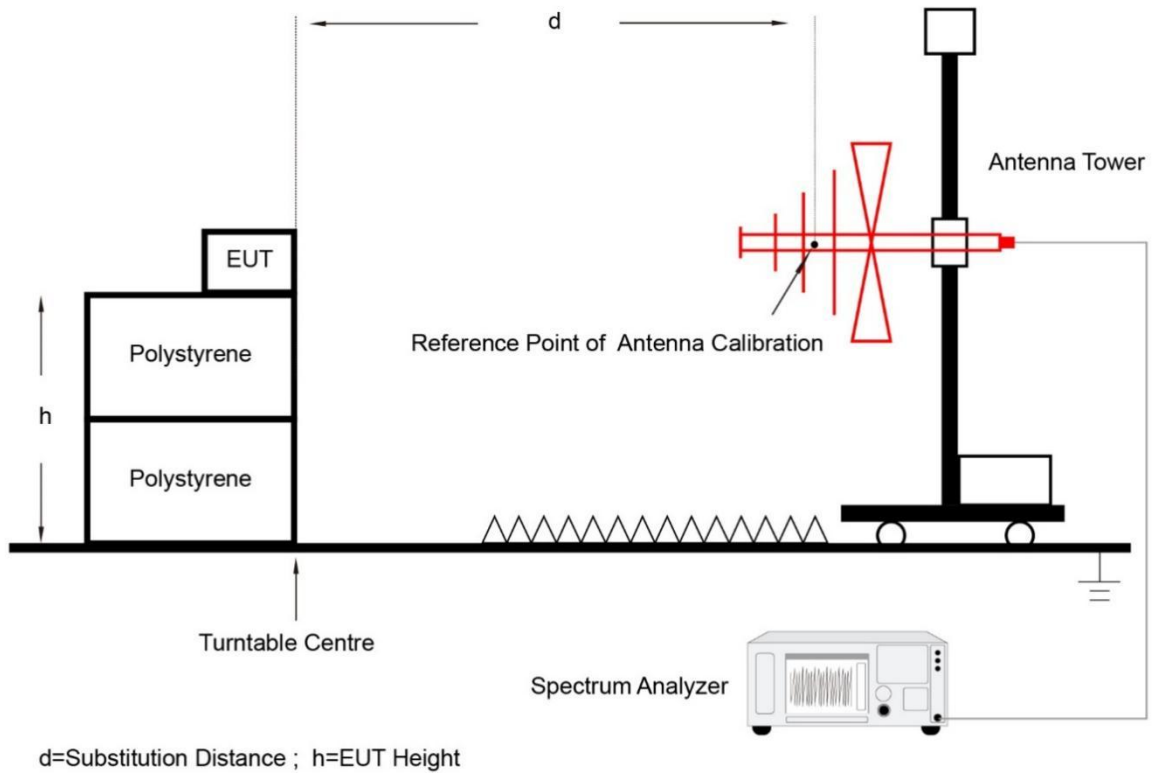

Above 1GHz Test Setup:

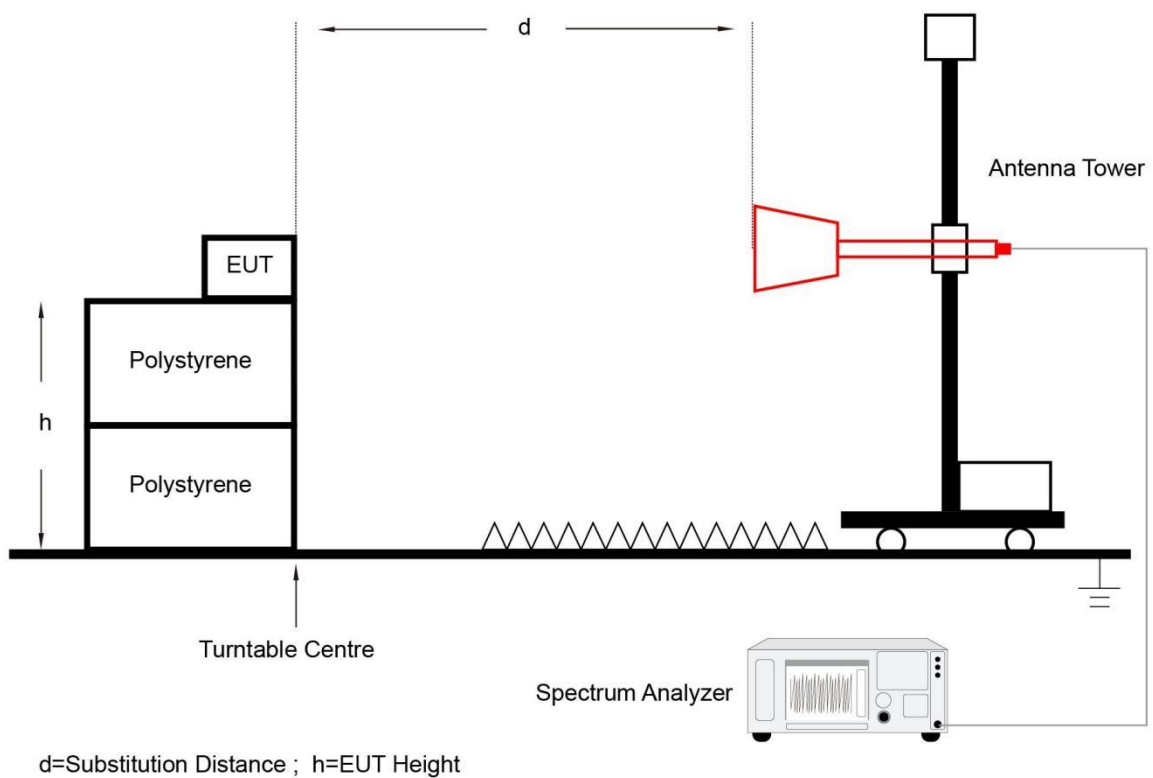

5.7.5. Test Result

Refer to Appendix A.6.

Appendix A – Test Result

A.1 RF Output Power Test Result

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2024-08-02		

Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Test Result
40/20mW Power Level			
606.000	14.59	≤ 23.98	Pass
607.875	14.55	≤ 23.98	Pass
653.125	10.34	≤ 23.98	Pass
657.000	10.52	≤ 23.98	Pass
2mW Power Level			
606.000	2.19	≤ 23.98	Pass
607.875	2.18	≤ 23.98	Pass
653.125	3.44	≤ 23.98	Pass
657.000	3.46	≤ 23.98	Pass

Note: Limit = $10 \cdot \log(250\text{mW}) = 23.98 \text{ dBm}$.

A.2 Frequency Tolerance Test Result

Test Site	WZ-TR3	Test Engineer	Lynn Yang
Test Date	2024-08-07	Test Mode	606MHz

Voltage (%)	Power (DC)	Temp (°C)	Frequency Tolerance (ppm)			
			0 minutes	2 minutes	5 minutes	10 minutes
100	3.6	- 20	0.00000	0.00000	-0.00008	-0.00011
		-10	0.00004	0.00004	0.00004	0.00003
		0	0.00006	0.00006	0.00005	0.00005
		+ 10	0.00007	0.00007	0.00007	0.00007
		+ 20	0.00008	0.00008	0.00009	0.00009
		+ 30	0.00008	0.00008	0.00008	0.00008
		+ 40	0.00006	0.00007	0.00007	0.00007
		+ 50	0.00007	0.00007	0.00007	0.00007
115	4.14	+ 20	0.00008	0.00008	0.00007	0.00007
85	3.06	+ 20	0.00007	0.00007	0.00007	0.00007

Note: Frequency Tolerance (ppm) = {[Measured Frequency (Hz) - Declared Frequency (Hz)] / Declared Frequency (Hz)} *10².

A.3 99% Occupied Bandwidth Test Result

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2024-08-02 ~ 2024-08-06		

Mode	Frequency (MHz)	99% Bandwidth (kHz)	Limit (kHz)	Result
STD (40/20mW)	606.000	180.160	< 200	Pass
	607.875	181.340	< 200	Pass
	653.125	180.410	< 200	Pass
	657.000	180.140	< 200	Pass
HD (2mW)	606.000	97.726	< 200	Pass
	607.875	98.070	< 200	Pass
	653.125	97.098	< 200	Pass
	657.000	97.503	< 200	Pass

99% Occupied Bandwidth – 40/20mW




99% Occupied Bandwidth - 2mW


606.000 MHz




607.875 MHz

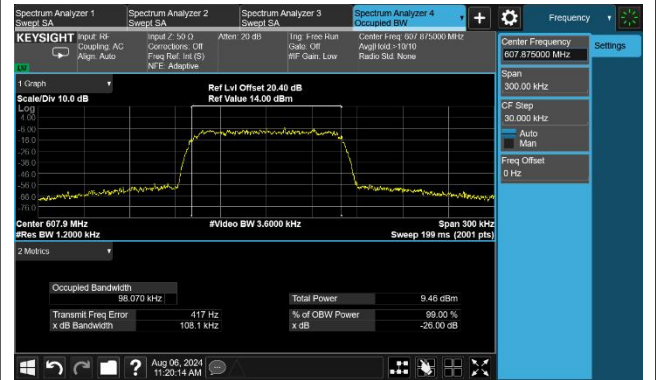

653.125 MHz

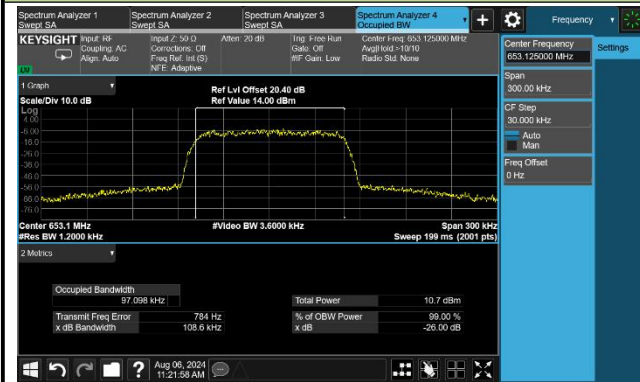

657.000 MHz

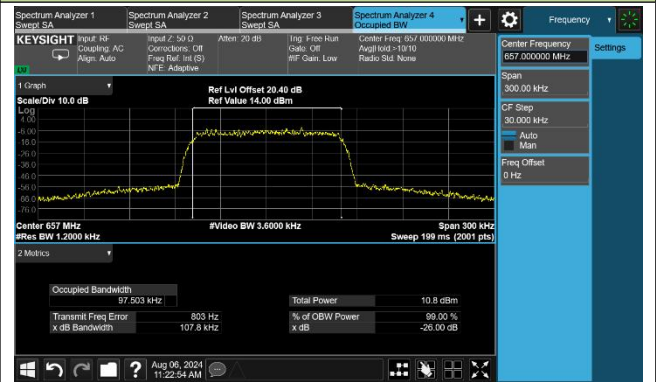

A.4 Out-of-band Emission Mask Test Result

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2024-08-02 2024-08-15	Test Mode	Mode 1


Emission Mask - 40mW

Channel 606.000MHz

Reference Level



Emission Mask

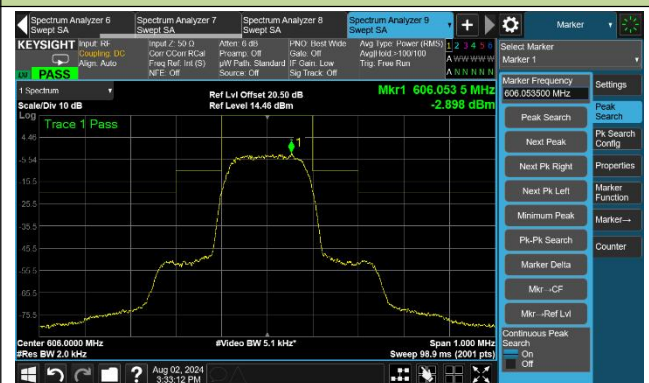

Channel 607.875 MHz

Reference Level



Emission Mask



Channel 653.125 MHz

Reference Level



Emission Mask




Emission Mask - 40mW

Channel 657.000 MHz

Reference Level



Emission Mask

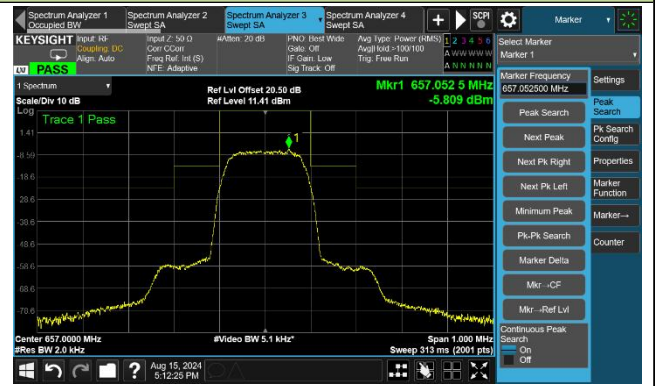

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2024-08-15	Test Mode	Mode 2


Emission Mask - 2mW

Channel 606.000MHz

Reference Level



Emission Mask

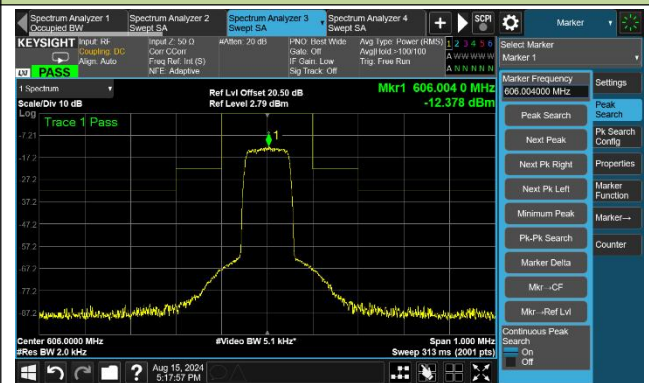


Channel 607.875 MHz

Reference Level



Emission Mask

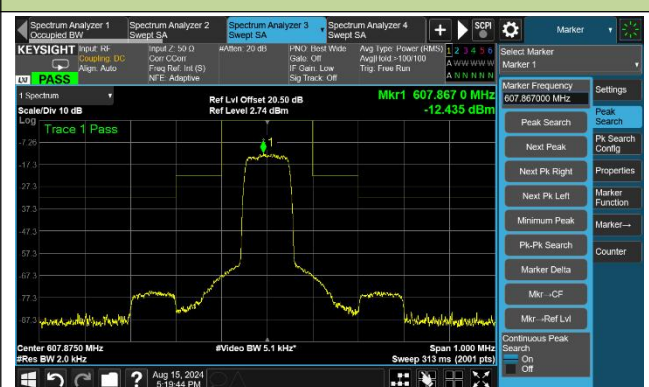


Channel 653.125 MHz

Reference Level



Emission Mask

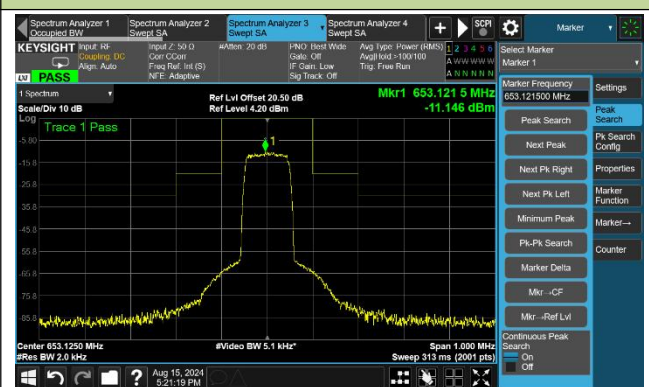


Emission Mask - 2mW

Channel 657.000 MHz

Reference Level



Emission Mask

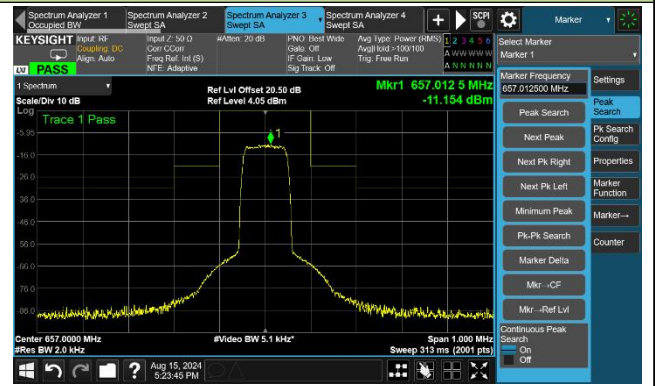

A.5 Necessary Bandwidth Test Result


Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2024-08-02	Test Mode	Mode 1

Necessary Bandwidth - 40mW, 606.000MHz


Step 1



Step 2

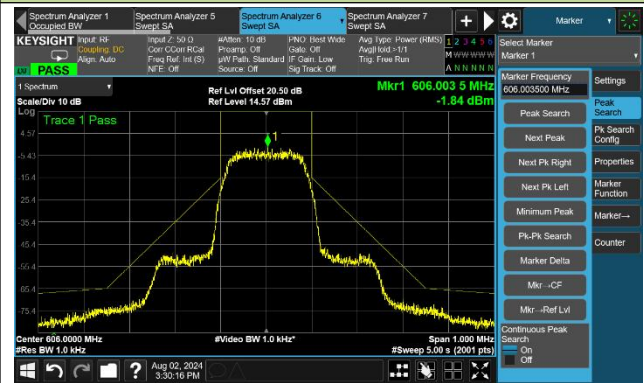

Step 3

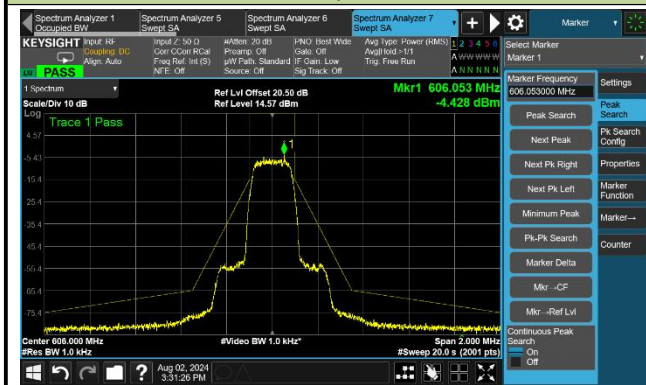

Necessary Bandwidth - 40mW, 607.875MHz


Step 1



Step 2



Step 3

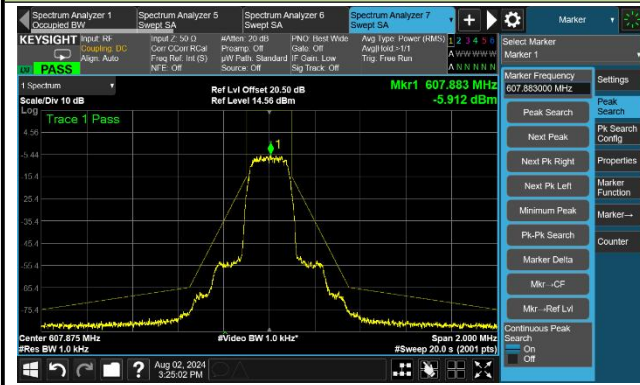


Necessary Bandwidth - 40mW, 653.125MHz


Step 1



Step 2

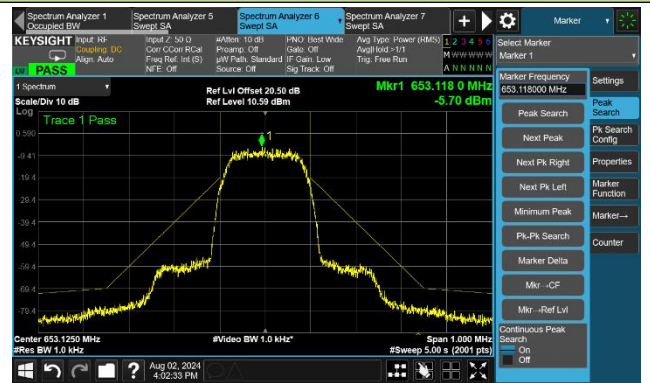

Step 3

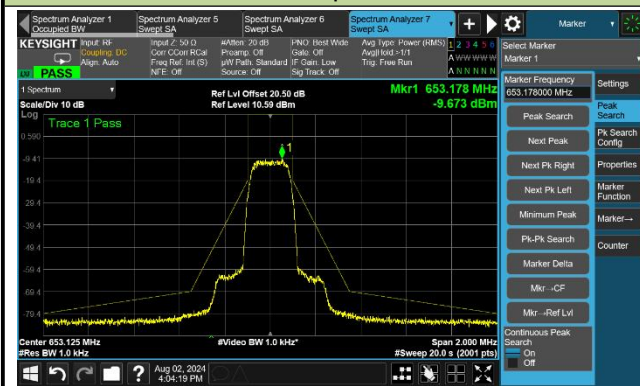


Necessary Bandwidth - 40mW, 657.000MHz


Step 1



Step 2

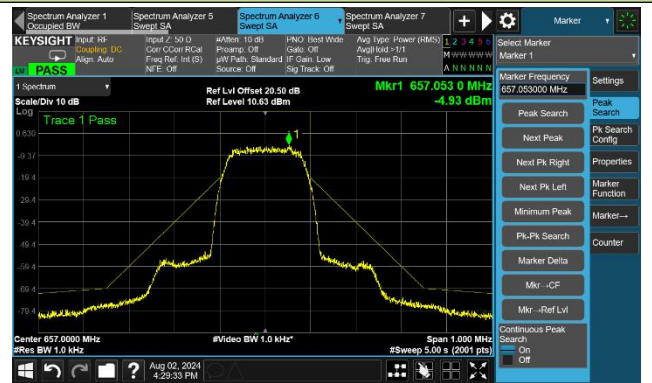


Step 3

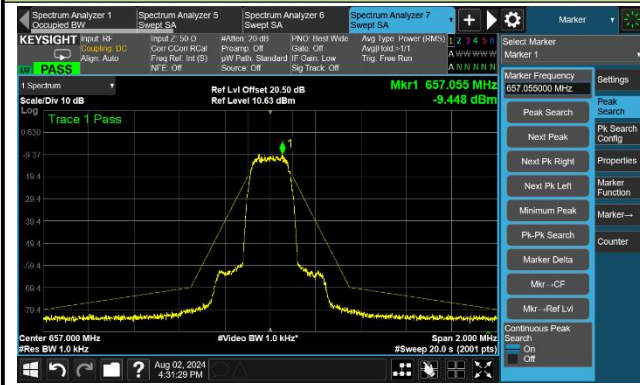


Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2024-08-15	Test Mode	Mode 2

Necessary Bandwidth - 2mW, 606.000MHz


Step 1

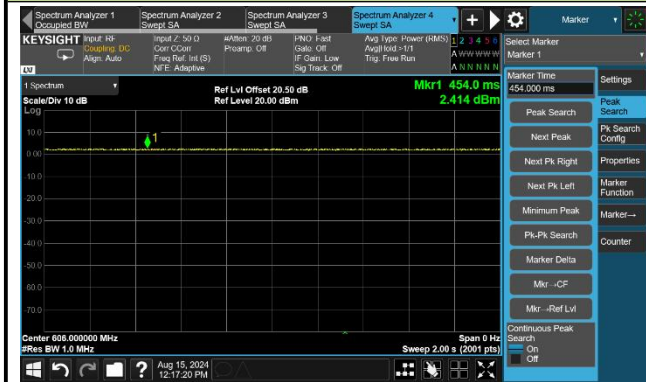

Step 2

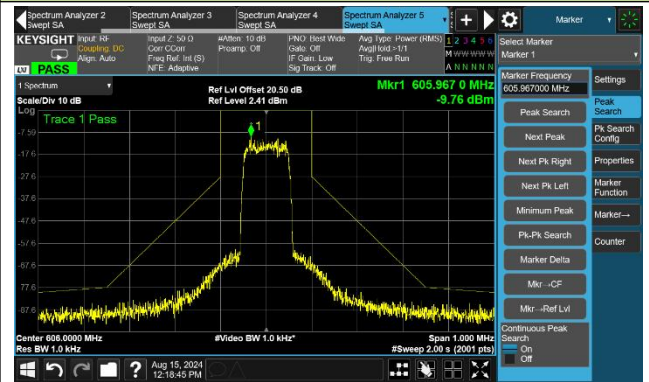


Step 3

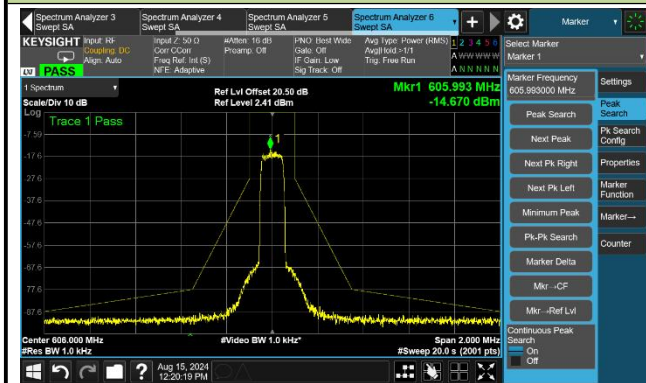


Necessary Bandwidth - 2mW, 607.875MHz


Step 1

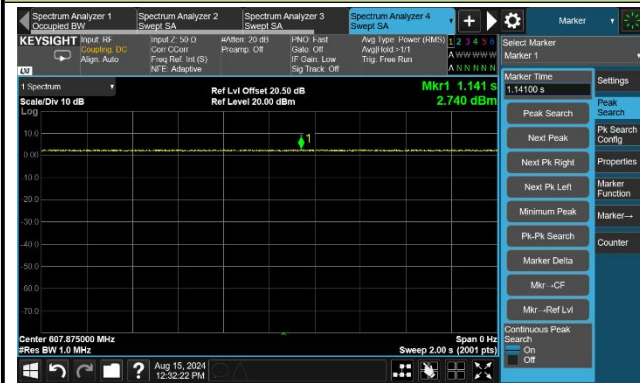

Step 2

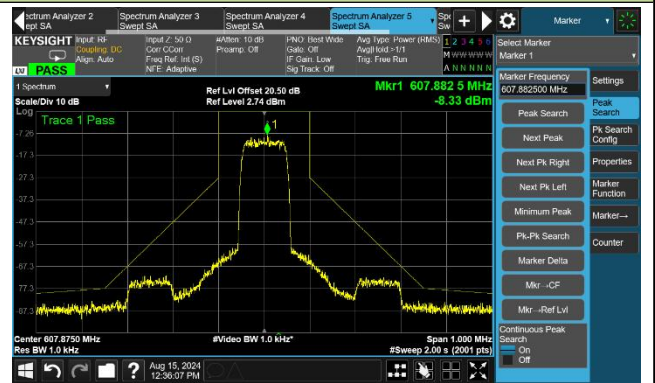

Step 3

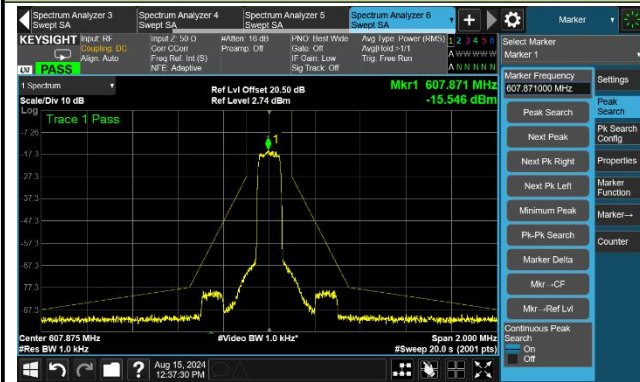


Necessary Bandwidth - 2mW, 653.125MHz


Step 1



Step 2

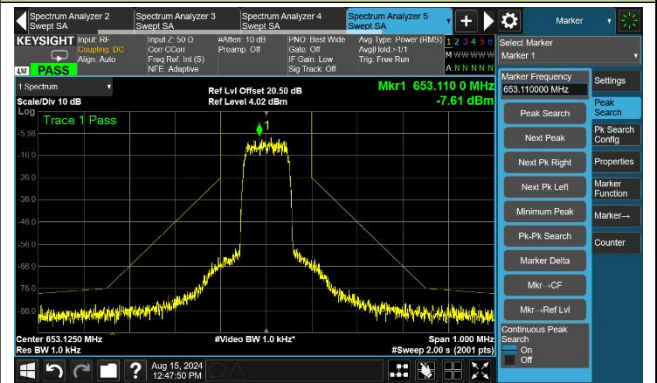


Step 3

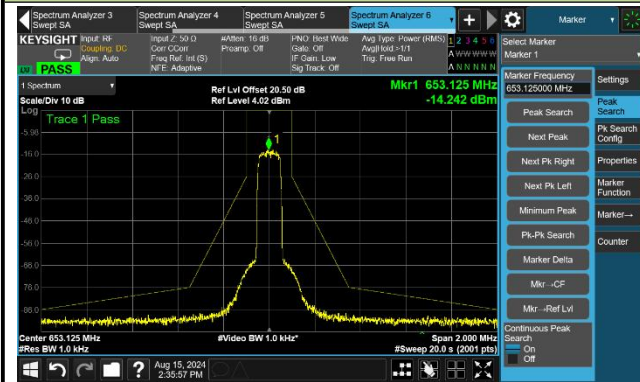


Necessary Bandwidth - 2mW, 657.000MHz


Step 1

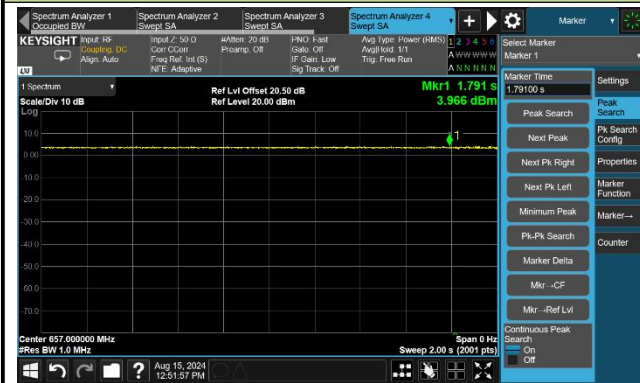

Step 2

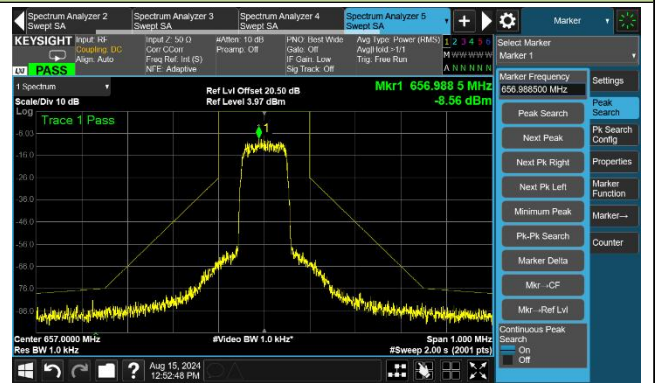

Step 3

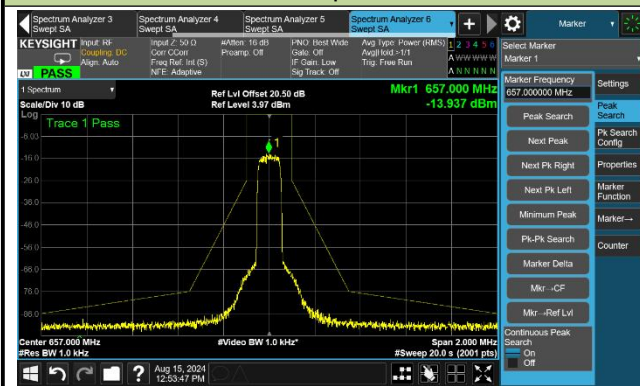

A.6 Radiated Spurious Emissions Test Result

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2024-08-07		

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
606.000	629.945	-93.1	33.8	-59.3	-54.0	-5.3	Peak	Horizontal
	715.693	-102.8	37.5	-65.3	-54.0	-11.3	Peak	Horizontal
	614.522	-101.2	34.4	-66.8	-54.0	-12.8	Peak	Vertical
	837.719	-102.8	37.8	-65.0	-54.0	-11.0	Peak	Vertical
	1211.800	-53.2	3.8	-49.4	-30.0	-19.4	Peak	Horizontal
	3029.800	-59.5	10.3	-49.2	-30.0	-19.2	Peak	Horizontal
	1817.800	-58.2	5.2	-53.0	-30.0	-23.0	Peak	Vertical
	3029.800	-57.3	10.6	-46.7	-30.0	-16.7	Peak	Vertical
607.875	620.633	-93.9	33.7	-60.2	-54.0	-6.2	Peak	Horizontal
	811.432	-102.6	36.7	-65.9	-54.0	-11.9	Peak	Horizontal
	619.469	-100.6	34.7	-65.9	-54.0	-11.9	Peak	Vertical
	835.488	-103.4	37.9	-65.5	-54.0	-11.5	Peak	Vertical
	1216.000	-52.5	3.4	-49.1	-30.0	-19.1	Peak	Horizontal
	3039.400	-61.1	10.1	-51.0	-30.0	-21.0	Peak	Horizontal
	1893.400	-58.0	5.4	-52.6	-30.0	-22.6	Peak	Vertical
	3038.800	-62.9	10.5	-52.4	-30.0	-22.4	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
653.125	659.918	-96.3	35.1	-61.2	-54.0	-7.2	Peak	Horizontal
	828.407	-102.9	37.2	-65.7	-54.0	-11.7	Peak	Horizontal
	562.918	-103.4	32.5	-70.9	-54.0	-16.9	Peak	Vertical
	829.280	-103.9	37.9	-66.0	-54.0	-12.0	Peak	Vertical
	1306.000	-57.5	4.4	-53.1	-30.0	-23.1	Peak	Horizontal
	3265.600	-61.4	11.9	-49.5	-30.0	-19.5	Peak	Horizontal
	2224.600	-65.8	9.3	-56.5	-30.0	-26.5	Peak	Vertical
	4822.000	-67.3	16.6	-50.7	-30.0	-20.7	Peak	Vertical
657.000	672.528	-97.1	35.5	-61.6	-54.0	-7.6	Peak	Horizontal
	836.749	-102.8	37.8	-65.0	-54.0	-11.0	Peak	Horizontal
	568.835	-103.9	32.9	-71.0	-54.0	-17.0	Peak	Vertical
	832.966	-104.3	38.1	-66.2	-54.0	-12.2	Peak	Vertical
	1970.800	-56.8	6.1	-50.7	-30.0	-20.7	Peak	Horizontal
	3284.800	-60.7	12.0	-48.7	-30.0	-18.7	Peak	Horizontal
	1970.800	-60.7	5.8	-54.9	-30.0	-24.9	Peak	Vertical
	3285.400	-62.2	12.0	-50.2	-30.0	-20.2	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: RMS measurement was not performed when peak measure level was lower than the RMS limit.

Appendix B – Test Setup Photograph

Refer to “2407RSU039-UT” file.

Appendix C – EUT Photograph

Refer to “2407RSU039-UE” file.

_____ The End _____